

# TEST REPORT

FCC LTE B41 Test for SM-F741B  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2405-FC010

**DATE OF ISSUE**  
May 3, 2024

**Tested by**  
Jae Mun Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2405-FC010

**DATE OF ISSUE**  
May 03, 2024

**Additional Model**  
-

**Applicant**      **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**      Mobile Phone  
**Model Name**      SM-F741B

**Date of Test**      February 22, 2024 ~ April 23, 2024

**FCC ID**      A3LSMF741B

**Location of Test**       Permanent Testing Lab     On Site Testing  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

**FCC Classification:**      PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**      § 27

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 03, 2024	Initial Release

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S.C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMF741U report.

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER .....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 CHANNEL EDGE.....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
3.8 WORST CASE(RADIATED TEST).....	18
3.9 WORST CASE(CONDUCTED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	20
5. MEASUREMENT UNCERTAINTY .....	21
6. SUMMARY OF TEST RESULTS.....	22
7. SAMPLE CALCULATION .....	23
8. TEST DATA(Main 2 Ant) .....	25
8.1 EFFECTIVE RADIATED POWER .....	25
8.2 RADIATED SPURIOUS EMISSIONS .....	27
8.3 PEAK-TO-AVERAGE RATIO.....	31
8.4 OCCUPIED BANDWIDTH .....	32
8.5 CONDUCTED SPURIOUS EMISSIONS.....	33
8.6 CHANNEL EDGE.....	34
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	35
9. TEST DATA(Sub 5 Ant) .....	47
9.1 EFFECTIVE RADIATED POWER .....	47
9.2 RADIATED SPURIOUS EMISSIONS .....	49
9.3 PEAK-TO-AVERAGE RATIO.....	53
9.4 OCCUPIED BANDWIDTH .....	54
9.5 CONDUCTED SPURIOUS EMISSIONS.....	55
9.6 CHANNEL EDGE.....	56
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	57
10. TEST PLOTS(Main 2 Ant) .....	69
11. TEST PLOTS(Sub 5 Ant).....	154
12. ANNEX A_ TEST SETUP PHOTO .....	239

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741B
<b>Additional Model(s)</b>	-
<b>Tx Frequency:</b>	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
<b>Date(s) of Tests:</b>	February 22, 2024 ~ April 23, 2024
<b>Serial number:</b>	Radiated : R3CX30HJ3RM(Main 2 Ant), R3CX30BD5WZ(Sub 5 Ant) Conducted : 7b5599bdac507ece

### 1.1. MAXIMUM OUTPUT POWER

#### Main 2 Ant

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 2	LTE – Band 41 (5)	2498.5 – 2687.5	4M51G7D	QPSK	0.195	22.91
			4M52W7D	16QAM	0.157	21.95
			4M51W7D	64QAM	0.124	20.93
			4M50W7D	256QAM	0.062	17.92
	LTE – Band 41 (10)	2501.0 – 2685.0	9M01G7D	QPSK	0.200	23.00
			8M98W7D	16QAM	0.161	22.08
			9M01W7D	64QAM	0.127	21.05
			8M99W7D	256QAM	0.063	18.01
	LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.199	22.98
			13M5W7D	16QAM	0.159	22.02
			13M5W7D	64QAM	0.126	21.02
			13M5W7D	256QAM	0.062	17.95
	LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.192	22.83
			18M0W7D	16QAM	0.156	21.93
			17M9W7D	64QAM	0.125	20.96
			17M9W7D	256QAM	0.061	17.88

#### Sub 5 Ant

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 2	LTE – Band 41 (5)	2498.5 – 2687.5	4M51G7D	QPSK	0.378	25.77
			4M52W7D	16QAM	0.307	24.87
			4M51W7D	64QAM	0.242	23.83
			4M50W7D	256QAM	0.119	20.74
	LTE – Band 41 (10)	2501.0 – 2685.0	8M98G7D	QPSK	0.369	25.67
			9M00W7D	16QAM	0.303	24.82
			9M02W7D	64QAM	0.240	23.80
			9M01W7D	256QAM	0.119	20.75
	LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.374	25.73
			13M5W7D	16QAM	0.310	24.91
			13M5W7D	64QAM	0.241	23.82
			13M5W7D	256QAM	0.119	20.76
	LTE – Band 41 (20)	2506.0 – 2680.0	17M9G7D	QPSK	0.370	25.68
			17M9W7D	16QAM	0.299	24.76
			18M0W7D	64QAM	0.235	23.71
			18M0W7D	256QAM	0.117	20.67

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

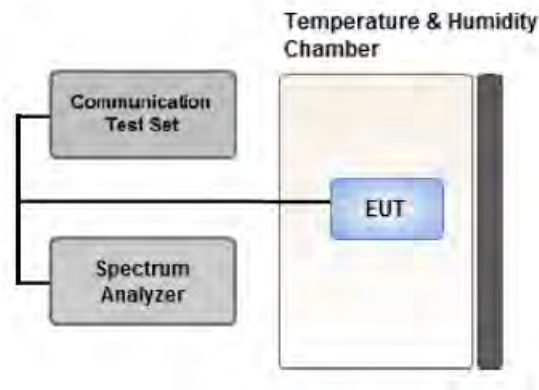

Test setup

① CCDF Procedure for PAPR

**Test Settings**

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R._{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

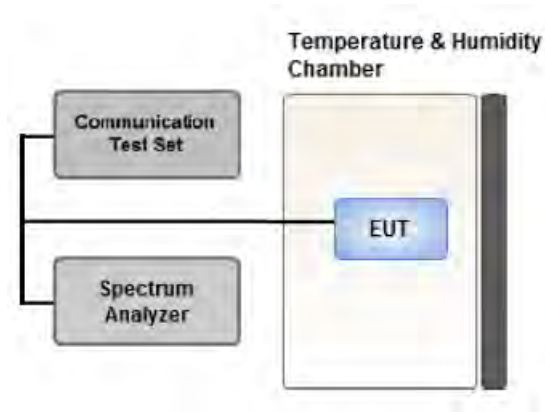

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

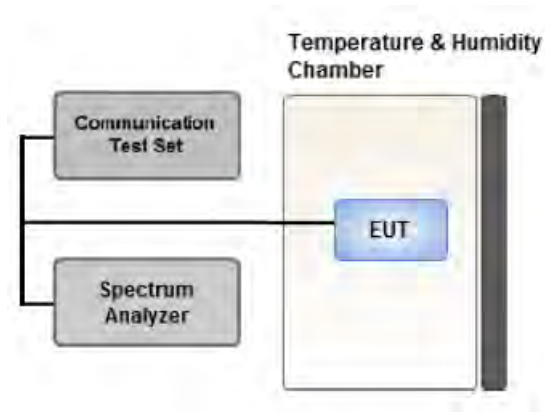

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

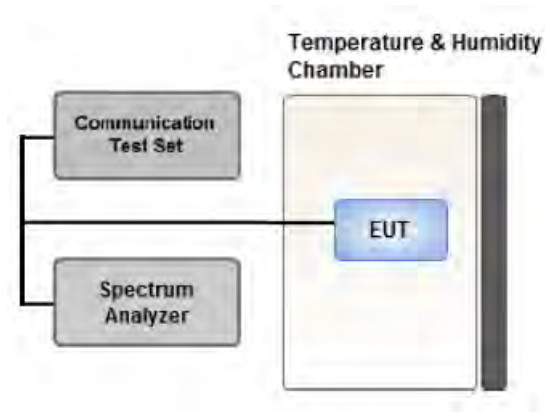

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6 MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

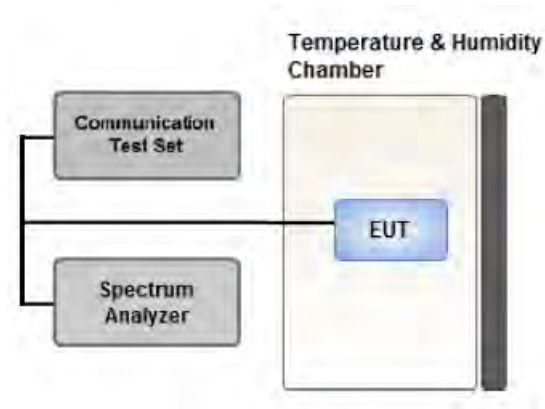

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
 Mode : Stand alone, Simultaneous transmission scenarios  
 Worst case : Stand alone
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
 Worst case: Open Mode.
- Please refer to the table below.

[ Main 2 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		X

[ Sub 5 Ant Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM, 256QAM	See Section 9.1		X
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		X

### 3.9 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
<b>Occupied Bandwidth</b>	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
<b>Peak-To-Average Ratio</b>	QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15, 20	Mid	Full RB	0
<b>Channel Edge</b>	QPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
<b>Spurious and Harmonic Emissions at Antenna Terminal</b>	QPSK	5, 10, 15, 20	Low, Mid, High	Full RB	0
			Low, Mid, High	1	0

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	<ul style="list-style-type: none"> <li>■ <math>&lt; 40 + 10\log_{10}(P[\text{Watts}])</math> at Channel edges</li> <li>■ <math>&lt; 43 + 10\log_{10}(P[\text{Watts}])</math> between 5 and X MHz from Channel edges</li> <li>■ <math>&lt; 55 + 10\log_{10}(P[\text{Watts}])</math> beyond X MHz beyond from Channel edges</li> <li>■ <math>&lt; 43 + 10 \log(P)</math> dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	$< 2$ Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 55 + 10\log_{10}(P[\text{Watts}])$	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



## 8. TEST DATA(Main 2 Ant)

### 8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2498.5	LTE B41/ 5 MHz	QPSK	-22.20	14.62	10.51	2.57	H	< 2.00	0.180	22.56	1	24
		16-QAM	-23.13	13.69	10.51	2.57	H		0.146	21.63		
		64-QAM	-24.16	12.66	10.51	2.57	H		0.115	20.60		
		256-QAM	-27.22	9.60	10.51	2.57	H		0.057	17.54		
2593.0		QPSK	-22.24	14.98	10.64	2.71	H		0.195	22.91	1	12
		16-QAM	-23.20	14.02	10.64	2.71	H		0.157	21.95		
		64-QAM	-24.22	13.00	10.64	2.71	H		0.124	20.93		
		256-QAM	-27.23	9.99	10.64	2.71	H		0.062	17.92		
2687.5		QPSK	-24.09	12.96	10.74	2.75	H		0.124	20.95	1	0
		16-QAM	-24.94	12.11	10.74	2.75	H		0.102	20.10		
		64-QAM	-26.02	11.03	10.74	2.75	H		0.080	19.02		
		256-QAM	-29.02	8.03	10.74	2.75	H		0.040	16.02		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2501.0	LTE B41/ 10 MHz	QPSK	-22.08	14.74	10.51	2.57	H	< 2.00	0.185	22.68	1	49
		16-QAM	-23.12	13.70	10.51	2.57	H		0.146	21.64		
		64-QAM	-24.11	12.71	10.51	2.57	H		0.116	20.65		
		256-QAM	-27.19	9.63	10.51	2.57	H		0.057	17.57		
2593.0		QPSK	-22.15	15.07	10.64	2.71	H		0.200	23.00	1	25
		16-QAM	-23.07	14.15	10.64	2.71	H		0.161	22.08		
		64-QAM	-24.10	13.12	10.64	2.71	H		0.127	21.05		
		256-QAM	-27.14	10.08	10.64	2.71	H		0.063	18.01		
2685.0		QPSK	-24.14	13.10	10.73	2.75	H		0.128	21.08	1	0
		16-QAM	-25.16	12.08	10.73	2.75	H		0.101	20.06		
		64-QAM	-26.13	11.11	10.73	2.75	H		0.081	19.09		
		256-QAM	-29.23	8.01	10.73	2.75	H		0.040	15.99		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2503.5	LTE B41/ 15 MHz	QPSK	-22.46	14.37	10.58	2.57	H	< 2.00	0.173	22.38	1	74
		16-QAM	-23.35	13.48	10.58	2.57	H		0.141	21.49		
		64-QAM	-24.33	12.50	10.58	2.57	H		0.112	20.51		
		256-QAM	-27.42	9.41	10.58	2.57	H		0.055	17.42		
2593.0		QPSK	-22.17	15.05	10.64	2.71	H		0.199	22.98	1	38
		16-QAM	-23.13	14.09	10.64	2.71	H		0.159	22.02		
		64-QAM	-24.13	13.09	10.64	2.71	H		0.126	21.02		
		256-QAM	-27.20	10.02	10.64	2.71	H		0.062	17.95		
2682.5		QPSK	-24.03	13.40	10.72	2.75	H		0.137	21.37	1	0
		16-QAM	-24.96	12.47	10.72	2.75	H		0.111	20.44		
		64-QAM	-25.97	11.46	10.72	2.75	H		0.088	19.43		
		256-QAM	-29.06	8.37	10.72	2.75	H		0.043	16.34		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2506.0	LTE B41/ 20 MHz	QPSK	-22.15	14.68	10.58	2.57	H	< 2.00	0.186	22.69	1	99
		16-QAM	-23.11	13.72	10.58	2.57	H		0.149	21.73		
		64-QAM	-24.13	12.70	10.58	2.57	H		0.118	20.71		
		256-QAM	-27.20	9.63	10.58	2.57	H		0.058	17.64		
2593.0		QPSK	-22.32	14.90	10.64	2.71	H		0.192	22.83	1	0
		16-QAM	-23.22	14.00	10.64	2.71	H		0.156	21.93		
		64-QAM	-24.19	13.03	10.64	2.71	H		0.125	20.96		
		256-QAM	-27.27	9.95	10.64	2.71	H		0.061	17.88		
2680.0		QPSK	-24.32	13.11	10.72	2.75	H		0.128	21.08	1	0
		16-QAM	-25.25	12.18	10.72	2.75	H		0.103	20.15		
		64-QAM	-26.27	11.16	10.72	2.75	H		0.082	19.13		
		256-QAM	-29.36	8.07	10.72	2.75	H		0.040	16.04		

## 8.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.91 dBm = 0.195 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>47.91 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39675 (2498.5)	4 997.00	-59.76	12.56	-69.57	3.81	H	-60.82	83.73	1	24
	7 495.50	-58.91	10.78	-58.52	4.71	H	-52.45	75.36		
	9 994.00	-61.42	11.18	-57.00	5.52	H	-51.34	74.25		
40620 (2593.0)	5 186.00	-59.21	12.55	-67.98	3.82	H	-59.26	82.17	1	12
	7 779.00	-55.99	11.41	-56.16	4.79	H	-49.54	72.45		
	10 372.00	-59.55	11.43	-54.10	5.59	V	-48.26	71.17		
41565 (2687.5)	5 375.00	-59.92	13.06	-69.10	3.85	H	-59.88	82.79	1	0
	8 062.50	-59.16	10.74	-57.35	4.86	H	-51.47	74.38		
	10 750.00	-59.83	11.31	-54.82	5.65	V	-49.16	72.07		

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>23.00 dBm = 0.200 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>10 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>48.00 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39700 (2501.0)	5 002.00	-58.71	12.56	-68.52	3.81	H	-59.77	82.77	1	49
	7 503.00	-56.95	10.78	-56.87	4.71	H	-50.80	73.80		
	10 004.00	-61.29	11.22	-57.10	5.52	V	-51.41	74.41		
40620 (2593.0)	5 186.00	-59.50	12.55	-68.27	3.82	V	-59.55	82.55	1	25
	7 779.00	-60.03	11.41	-60.20	4.79	H	-53.58	76.58		
	10 372.00	-60.03	11.43	-54.58	5.59	V	-48.74	71.74		
41540 (2685.0)	5 370.00	-58.33	13.07	-67.43	3.85	H	-58.21	81.21	1	0
	8 055.00	-60.80	10.74	-58.98	4.87	H	-53.11	76.11		
	10 740.00	-59.56	11.32	-54.85	5.71	H	-49.24	72.24		

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 22.98 dBm = 0.199 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  47.98 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39725 (2503.5)	5 007.00	-59.01	12.55	-69.03	3.88	V	-60.36	83.34	1	74
	7 510.50	-59.98	10.78	-60.39	4.71	V	-54.32	77.30		
	10 014.00	-61.88	11.25	-57.64	5.53	H	-51.92	74.90		
40620 (2593.0)	5 186.00	-59.71	12.55	-68.48	3.82	H	-59.76	82.74	1	38
	7 779.00	-60.07	11.41	-60.24	4.79	H	-53.62	76.60		
	10 372.00	-59.37	11.43	-53.92	5.59	H	-48.08	71.06		
41515 (2682.5)	5 365.00	-59.31	13.08	-68.30	3.86	V	-59.07	82.05	1	0
	8 047.50	-58.63	10.73	-56.80	4.87	V	-50.94	73.92		
	10 730.00	-58.56	11.33	-54.11	5.78	V	-48.56	71.54		

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.83 dBm = 0.192 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>20 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>47.83 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39750 (2506.0)	5 012.00	-56.54	12.55	-66.56	3.88	H	-57.89	80.72	1	99
	7 518.00	-57.76	10.82	-58.46	4.71	V	-52.35	75.18		
	10 024.00	-59.24	11.29	-55.02	5.54	H	-49.26	72.09		
40620 (2593.0)	5 186.00	-57.55	12.55	-66.32	3.82	H	-57.60	80.43	1	0
	7 779.00	-58.01	11.41	-58.18	4.79	V	-51.56	74.39		
	10 372.00	-59.23	11.43	-53.78	5.59	V	-47.94	70.77		
41490 (2680.0)	5 360.00	-57.26	13.09	-66.13	3.86	H	-56.90	79.73	1	0
	8 040.00	-58.91	10.73	-57.12	4.86	V	-51.25	74.08		
	10 720.00	-55.58	11.33	-51.21	5.81	V	-45.69	68.52		

### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41	5 MHz	2593.0	QPSK	25	0	5.84
			16-QAM			6.50
			64-QAM			6.78
			256-QAM			6.77
	10 MHz		QPSK	50		5.97
			16-QAM			6.54
			64-QAM			6.59
			256-QAM			6.66
	15 MHz		QPSK	75		5.82
			16-QAM			6.50
			64-QAM			6.56
			256-QAM			6.64
	20 MHz		QPSK	100		5.82
			16-QAM			6.54
			64-QAM			6.63
			256-QAM			6.59

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 114 ~ 129.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5109
			16-QAM			4.5172
			64-QAM			4.5107
			256-QAM			4.5023
	10 MHz		QPSK	50		9.0103
			16-QAM			8.9774
			64-QAM			9.0048
			256-QAM			8.9862
	15 MHz		QPSK	75		13.479
			16-QAM			13.453
			64-QAM			13.460
			256-QAM			13.471
	20 MHz		QPSK	100		17.940
			16-QAM			17.958
			64-QAM			17.936
			256-QAM			17.931

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 98 ~ 113.



### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	4.0604	31.955	-70.451	-38.496	-25.00
		2593.0	6.0379	32.570	-70.736	-38.166	
		2687.5	4.8998	31.955	-70.932	-38.977	
	10	2501.0	3.7683	31.955	-70.163	-38.208	
		2593.0	8.0190	32.570	-70.831	-38.261	
		2685.0	9.1979	32.570	-71.134	-38.564	
	15	2503.5	8.0025	32.570	-69.929	-37.359	
		2593.0	4.3590	31.955	-70.617	-38.662	
		2682.5	8.2652	32.570	-70.733	-38.163	
	20	2506.0	4.0584	31.955	-70.660	-38.705	
		2593.0	7.9616	32.570	-70.683	-38.113	
		2680.0	9.7049	32.570	-70.248	-37.678	

Note:

- Plots of the EUT's Conducted Spurious Emissions are shown Page 130 ~ 153.
- Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
- Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 - 1	29.249
1 - 5	31.955
5 - 10	32.570
10 - 15	33.095
15 - 20	33.468
Above 20	34.110

**8.6 CHANNEL EDGE**

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-26.15	-25.20	-32.34	-30.98	-39.87	-39.98	-42.10
10 MHz	2501.0	QPSK	50/0	-29.50	-28.45	-32.30	-34.06	-37.34	-37.43	-43.27
15 MHz	2503.5	QPSK	75/0	-34.26	-33.35	-37.44	-35.58	-41.48	-40.63	-46.97
20 MHz	2506.0	QPSK	100/0	-35.50	-33.56	-38.81	-33.01	-42.33	-41.24	-48.00
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-23.69	-22.97	-27.03	-23.38
	2687.5	QPSK	25	0	-22.33	-23.05	-22.52	-23.02
10 MHz	2593.0	QPSK	50	0	-27.47	-27.62	-29.97	-21.90
	2685.0	QPSK	50	0	-26.36	-26.73	-25.68	-27.10
15 MHz	2593.0	QPSK	75	0	-29.96	-28.46	-25.43	-32.67
	2682.5	QPSK	75	0	-27.86	-28.47	-27.85	-28.94
20 MHz	2593.0	QPSK	100	0	-31.62	-31.29	-31.69	-33.98
	2680.0	QPSK	100	0	-29.09	-30.43	-29.20	-31.43
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-36.94	-37.32	-38.24	-37.33
	2687.5	QPSK	25	0	-30.36	-31.27	-31.78	-32.70
10 MHz	2593.0	QPSK	50	0	-30.06	-29.09	-41.18	-37.07
	2685.0	QPSK	50	0	-28.23	-29.50	-31.35	-33.39
15 MHz	2593.0	QPSK	75	0	-32.37	-35.16	-47.15	-44.33
	2682.5	QPSK	75	0	-30.65	-32.39	-35.91	-35.83
20 MHz	2593.0	QPSK	100	0	-36.28	-37.30	-49.47	-45.81
	2680.0	QPSK	100	0	-31.07	-32.79	-36.71	-39.42
Limit(dBm)					-13.0		-25.0	


**Note:**

- C.E = Channel Edge
- X = X is the greater of 6 MHz or the actual emission bandwidth.
- X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
- RB = Resource Block
- Duty Cycle factor already applied on the factor.
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
  - Duty Cycle Factor(dB) = 3.979
- Plots of the EUT's Channel Edge are shown Page 70 ~ 97. (1RB & Full RB)

### 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2498 500 007	0.0	0.000 000	0.000
100 %		-30	2498 500 016	8.4	0.000 000	0.003
100 %		-20	2498 500 012	5.3	0.000 000	0.002
100 %		-10	2498 500 015	8.1	0.000 000	0.003
100 %		0	2498 500 013	6.2	0.000 000	0.002
100 %		+10	2498 500 012	4.8	0.000 000	0.002
100 %		+30	2498 500 013	5.7	0.000 000	0.002
100 %		+40	2498 500 014	6.8	0.000 000	0.003
100 %		+50	2498 500 014	6.9	0.000 000	0.003
Batt. Endpoint		3.300	+20	2498 500 013	5.8	0.000 000

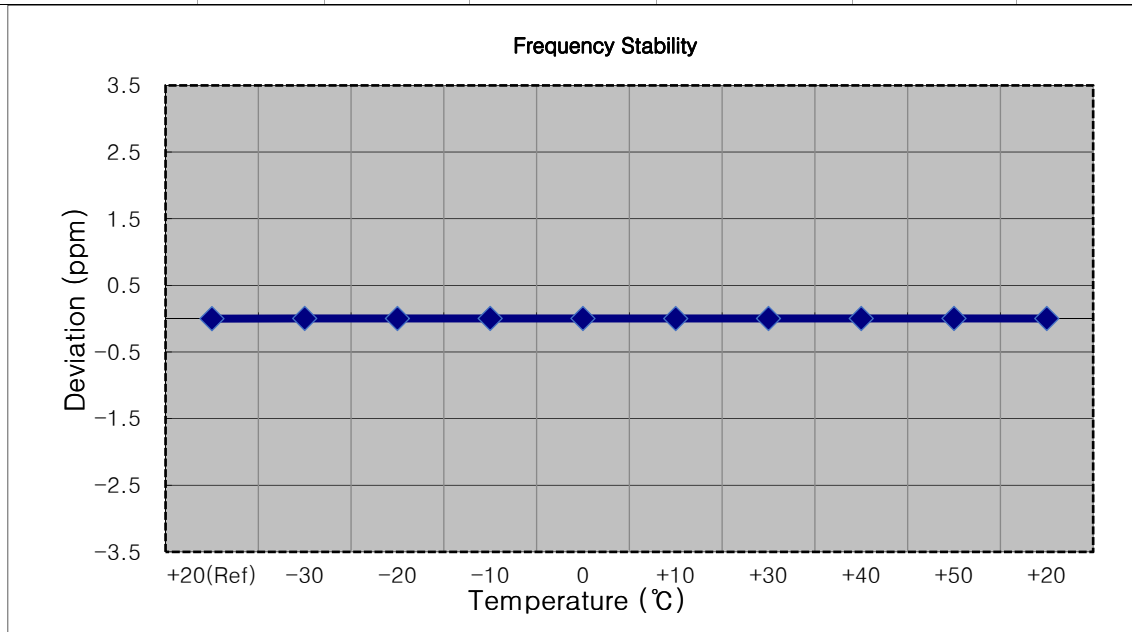


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2501 000 004	0.0	0.000 000	0.000
100 %		-30	2501 000 000	-3.5	0.000 000	-0.001
100 %		-20	2500 999 999	-4.6	0.000 000	-0.002
100 %		-10	2500 999 999	-4.3	0.000 000	-0.002
100 %		0	2501 000 000	-3.7	0.000 000	-0.001
100 %		+10	2500 999 999	-4.3	0.000 000	-0.002
100 %		+30	2501 000 000	-3.8	0.000 000	-0.002
100 %		+40	2501 000 001	-3.1	0.000 000	-0.001
100 %		+50	2501 000 010	5.8	0.000 000	0.002
Batt. Endpoint		3.300	+20	2501 000 009	5.0	0.000 000

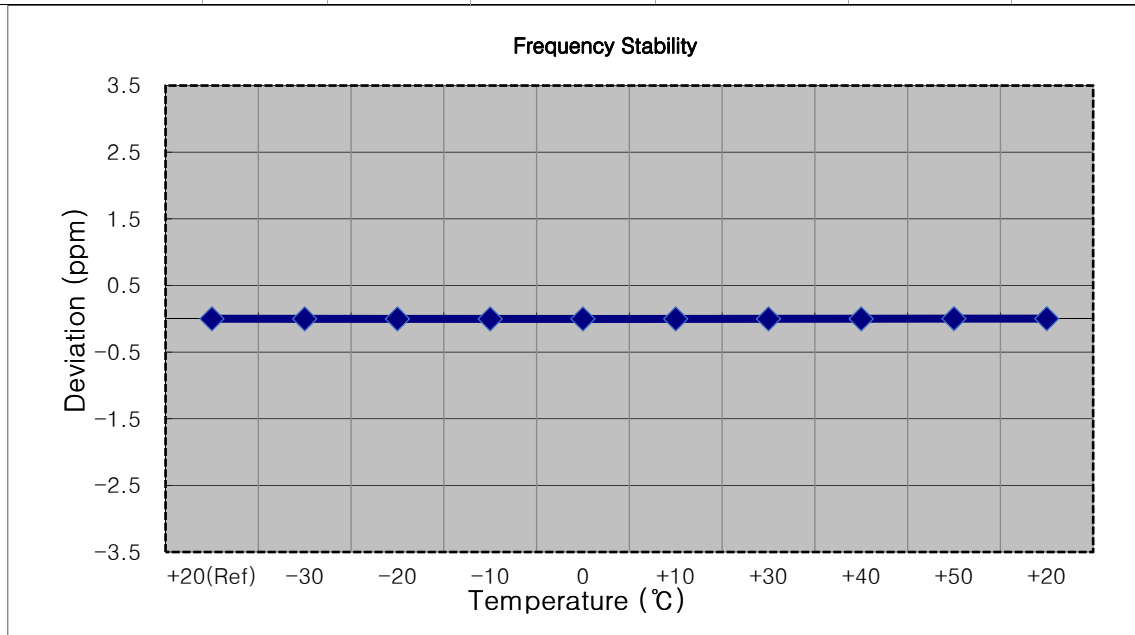


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2503 500 005	0.0	0.000 000	0.000
100 %		-30	2503 500 011	5.5	0.000 000	0.002
100 %		-20	2503 500 009	3.8	0.000 000	0.002
100 %		-10	2503 500 009	3.9	0.000 000	0.002
100 %		0	2503 500 009	4.3	0.000 000	0.002
100 %		+10	2503 500 010	5.0	0.000 000	0.002
100 %		+30	2503 500 001	-3.7	0.000 000	-0.001
100 %		+40	2503 500 008	3.0	0.000 000	0.001
100 %		+50	2503 500 010	4.6	0.000 000	0.002
Batt. Endpoint		3.300	+20	2503 500 011	6.4	0.000 000

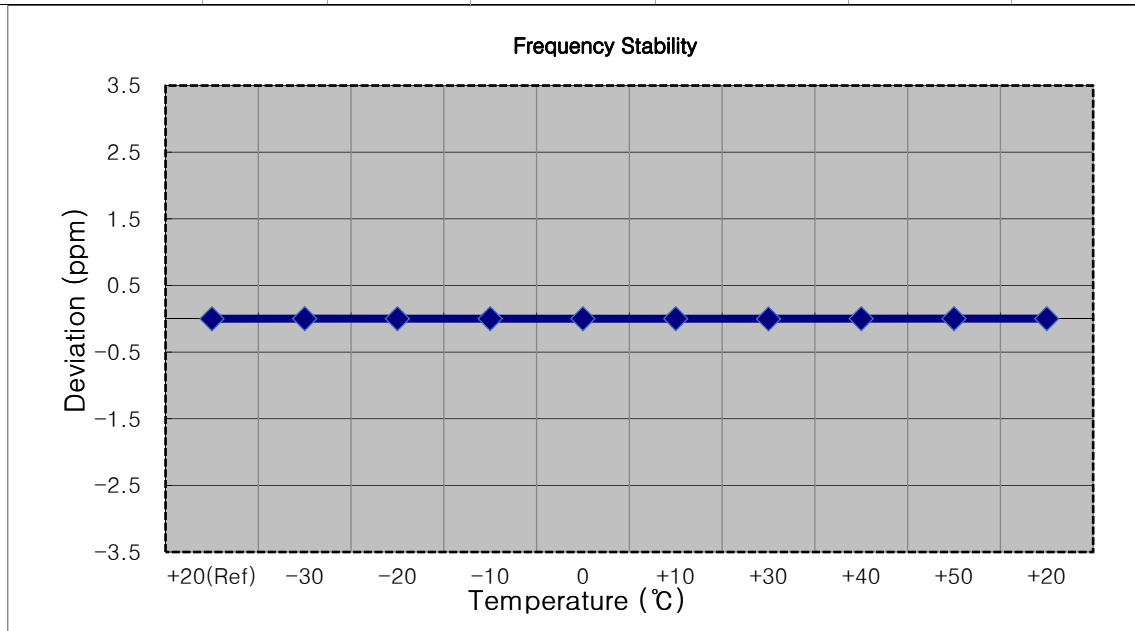


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2506 000 006	0.0	0.000 000	0.000
100 %		-30	2506 000 009	3.1	0.000 000	0.001
100 %		-20	2506 000 015	9.6	0.000 000	0.004
100 %		-10	2506 000 013	7.7	0.000 000	0.003
100 %		0	2506 000 000	-5.1	0.000 000	-0.002
100 %		+10	2506 000 011	5.0	0.000 000	0.002
100 %		+30	2506 000 008	2.4	0.000 000	0.001
100 %		+40	2506 000 015	9.0	0.000 000	0.004
100 %		+50	2506 000 011	5.8	0.000 000	0.002
Batt. Endpoint		3.300	+20	2506 000 001	-4.6	0.000 000

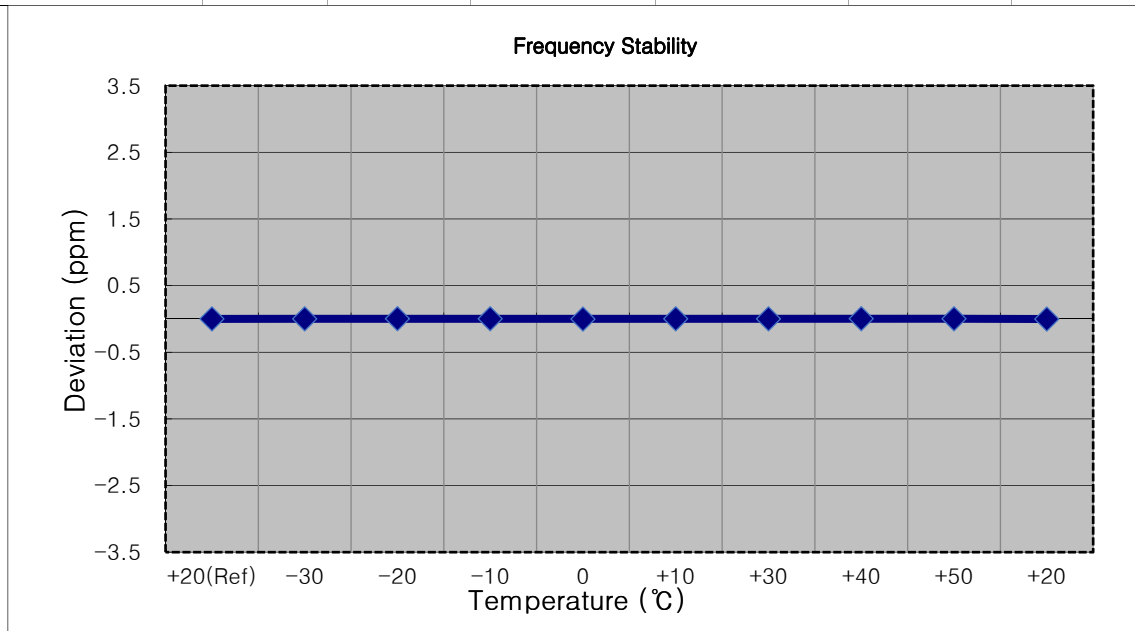


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 005	0.0	0.000 000	0.000
100 %		-30	2593 000 008	3.0	0.000 000	0.001
100 %		-20	2593 000 007	2.2	0.000 000	0.001
100 %		-10	2593 000 009	3.6	0.000 000	0.001
100 %		0	2593 000 001	-3.6	0.000 000	-0.001
100 %		+10	2593 000 003	-2.4	0.000 000	-0.001
100 %		+30	2593 000 007	2.3	0.000 000	0.001
100 %		+40	2593 000 008	3.5	0.000 000	0.001
100 %		+50	2593 000 009	3.9	0.000 000	0.002
Batt. Endpoint		3.300	+20	2593 000 000	-5.0	0.000 000

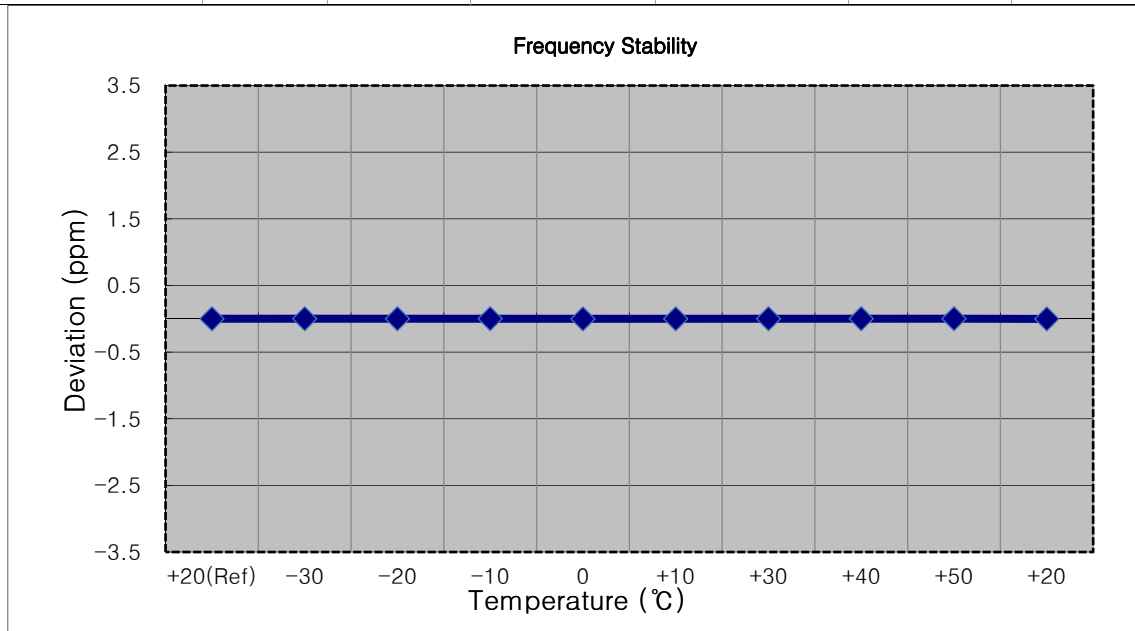

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 004	0.0	0.000 000	0.000
100 %		-30	2593 000 008	3.2	0.000 000	0.001
100 %		-20	2593 000 008	3.3	0.000 000	0.001
100 %		-10	2593 000 001	-3.1	0.000 000	-0.001
100 %		0	2593 000 003	-1.8	0.000 000	-0.001
100 %		+10	2593 000 007	2.7	0.000 000	0.001
100 %		+30	2593 000 006	1.9	0.000 000	0.001
100 %		+40	2593 000 009	4.5	0.000 000	0.002
100 %		+50	2593 000 008	3.3	0.000 000	0.001
Batt. Endpoint		3.300	+20	2593 000 007	2.7	0.000 000

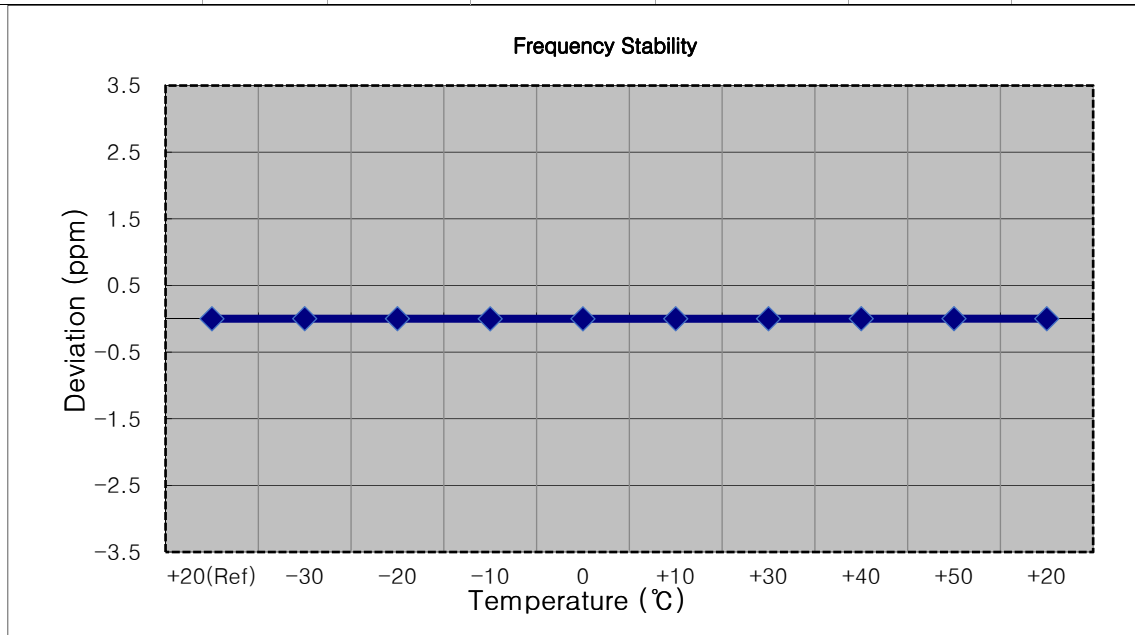




- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 998	0.0	0.000 000	0.000
100 %		-30	2593 000 001	2.9	0.000 000	0.001
100 %		-20	2593 000 001	3.0	0.000 000	0.001
100 %		-10	2593 000 001	2.9	0.000 000	0.001
100 %		0	2593 000 001	2.5	0.000 000	0.001
100 %		+10	2593 000 003	4.6	0.000 000	0.002
100 %		+30	2593 000 001	2.4	0.000 000	0.001
100 %		+40	2592 999 993	-5.3	0.000 000	-0.002
100 %		+50	2593 000 001	2.9	0.000 000	0.001
Batt. Endpoint		3.300	+20	2592 999 994	-4.1	0.000 000

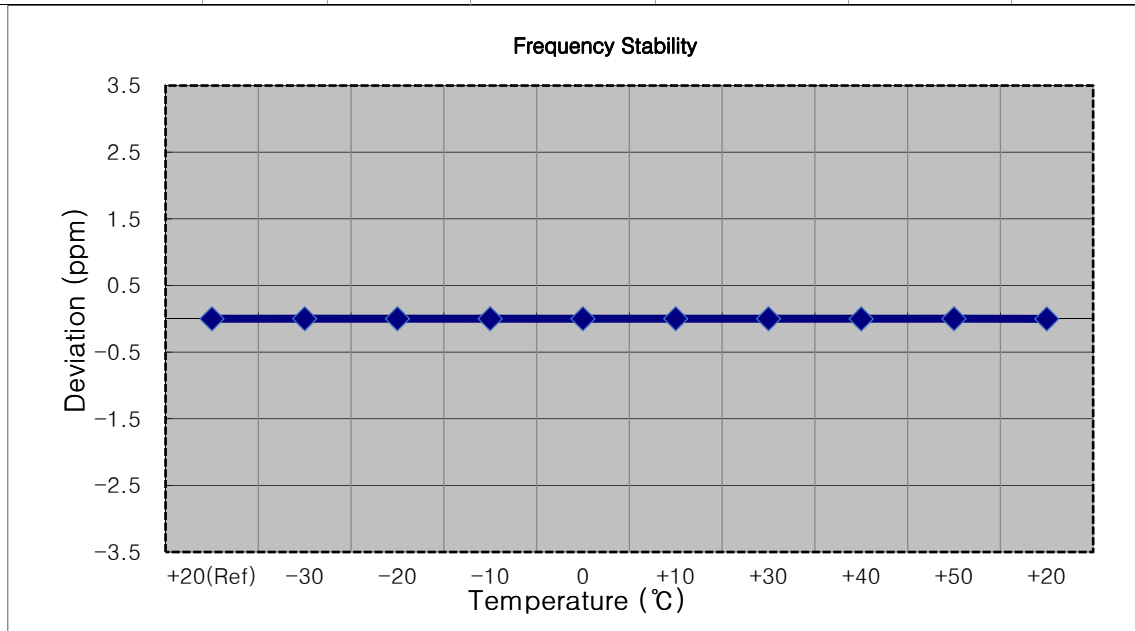


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 996	0.0	0.000 000	0.000
100 %		-30	2592 999 995	-1.7	0.000 000	-0.001
100 %		-20	2593 000 002	5.2	0.000 000	0.002
100 %		-10	2593 000 000	3.4	0.000 000	0.001
100 %		0	2592 999 992	-4.0	0.000 000	-0.002
100 %		+10	2592 999 995	-1.4	0.000 000	-0.001
100 %		+30	2592 999 999	2.7	0.000 000	0.001
100 %		+40	2592 999 998	1.6	0.000 000	0.001
100 %		+50	2593 000 000	3.4	0.000 000	0.001
Batt. Endpoint		3.300	+20	2592 999 999	2.6	0.000 000

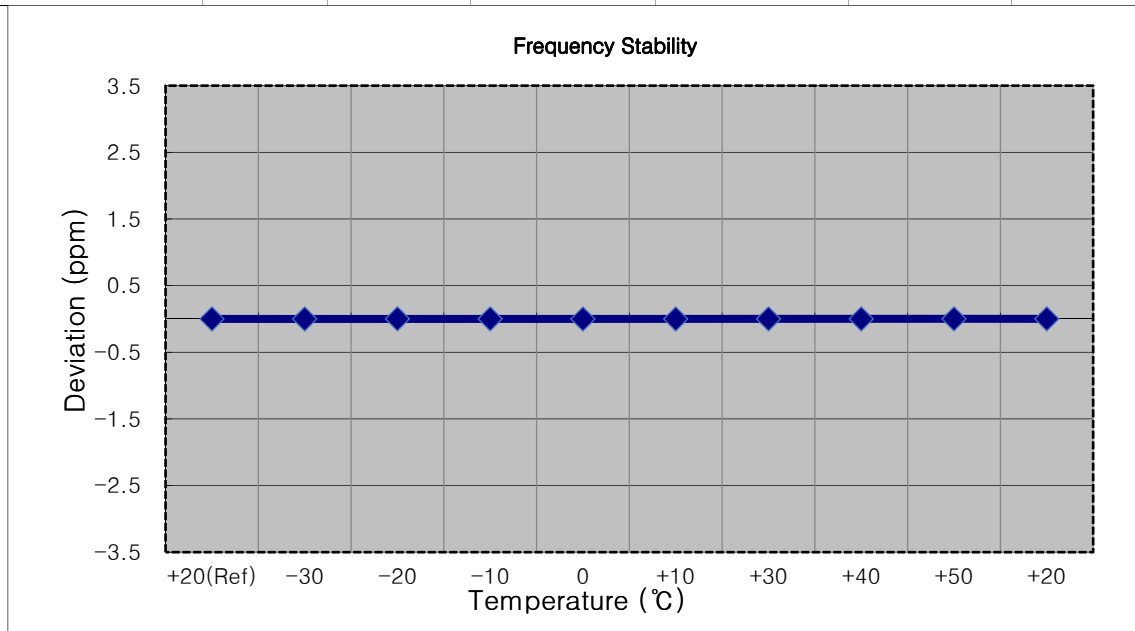


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 499 995	0.0	0.000 000	0.000
100 %		-30	2687 499 987	-8.0	0.000 000	-0.003
100 %		-20	2687 499 989	-5.6	0.000 000	-0.002
100 %		-10	2687 499 989	-5.6	0.000 000	-0.002
100 %		0	2687 499 991	-3.6	0.000 000	-0.001
100 %		+10	2687 499 987	-7.8	0.000 000	-0.003
100 %		+30	2687 499 986	-8.6	0.000 000	-0.003
100 %		+40	2687 499 991	-3.7	0.000 000	-0.001
100 %		+50	2687 499 991	-3.7	0.000 000	-0.001
Batt. Endpoint		3.300	+20	2687 499 985	-9.9	0.000 000

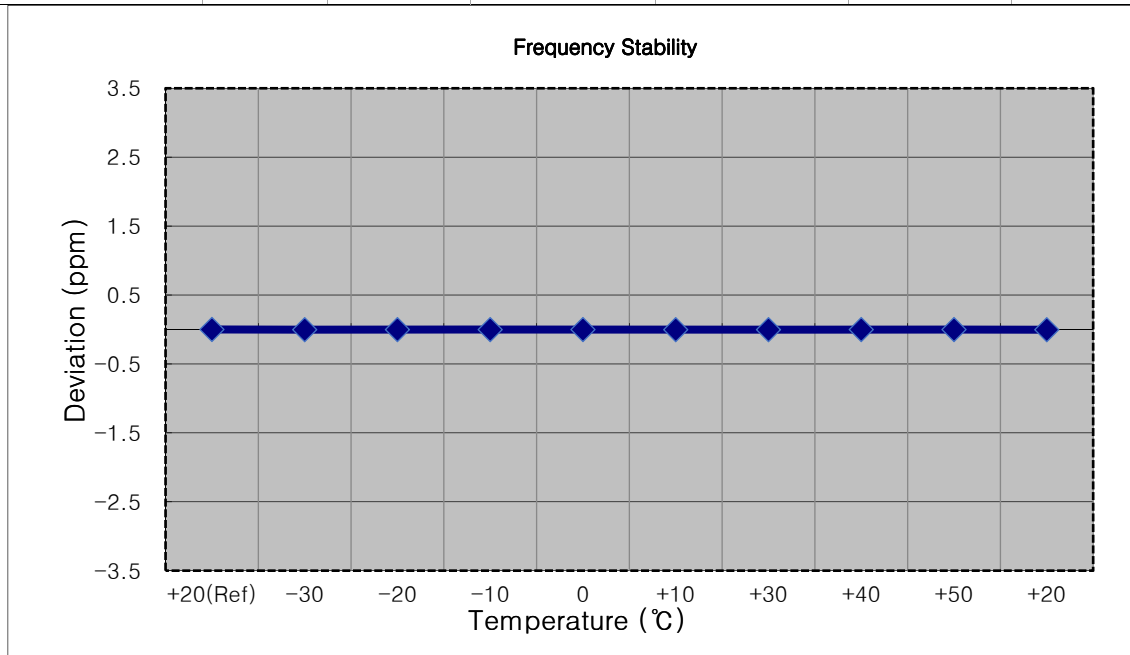


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2684 999 994	0.0	0.000 000	0.000
100 %		-30	2684 999 990	-3.8	0.000 000	-0.001
100 %		-20	2684 999 989	-5.4	0.000 000	-0.002
100 %		-10	2684 999 990	-4.2	0.000 000	-0.002
100 %		0	2684 999 989	-5.2	0.000 000	-0.002
100 %		+10	2684 999 991	-2.8	0.000 000	-0.001
100 %		+30	2684 999 989	-4.9	0.000 000	-0.002
100 %		+40	2684 999 992	-2.2	0.000 000	-0.001
100 %		+50	2684 999 990	-3.8	0.000 000	-0.001
Batt. Endpoint		3.300	+20	2684 999 997	3.2	0.000 000

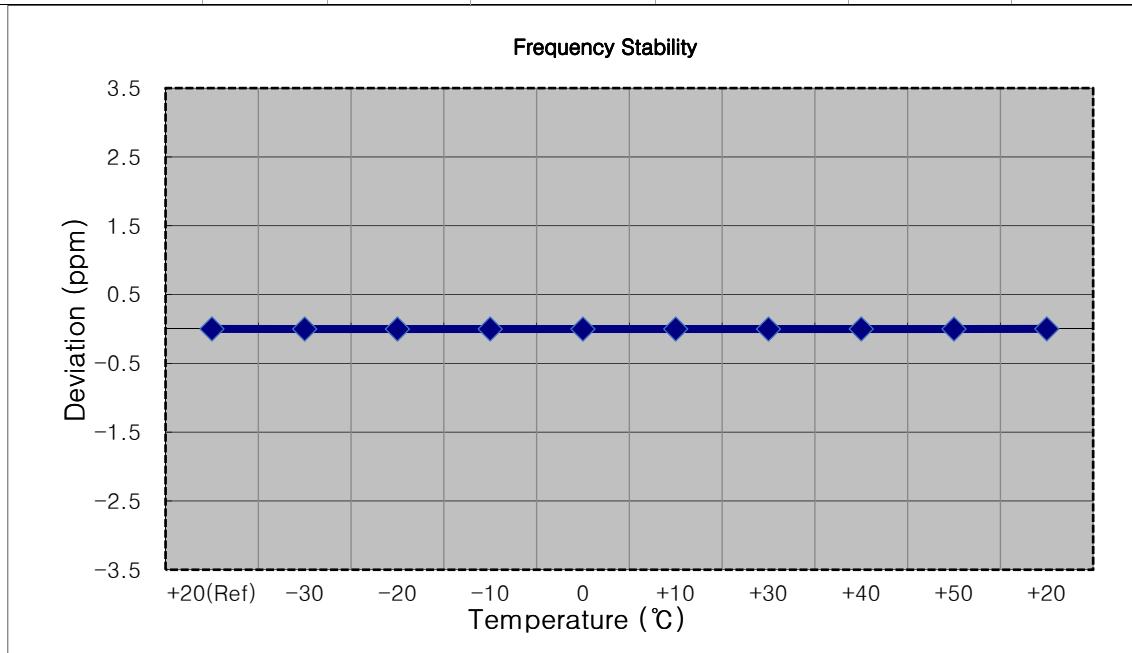


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2682 499 995	0.0	0.000 000	0.000
100 %		-30	2682 499 990	-5.1	0.000 000	-0.002
100 %		-20	2682 499 985	-9.6	0.000 000	-0.004
100 %		-10	2682 499 986	-8.5	0.000 000	-0.003
100 %		0	2682 499 990	-4.4	0.000 000	-0.002
100 %		+10	2682 499 990	-5.0	0.000 000	-0.002
100 %		+30	2682 499 989	-6.0	0.000 000	-0.002
100 %		+40	2682 499 988	-7.1	0.000 000	-0.003
100 %		+50	2682 499 989	-5.8	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2682 499 986	-8.6	0.000 000

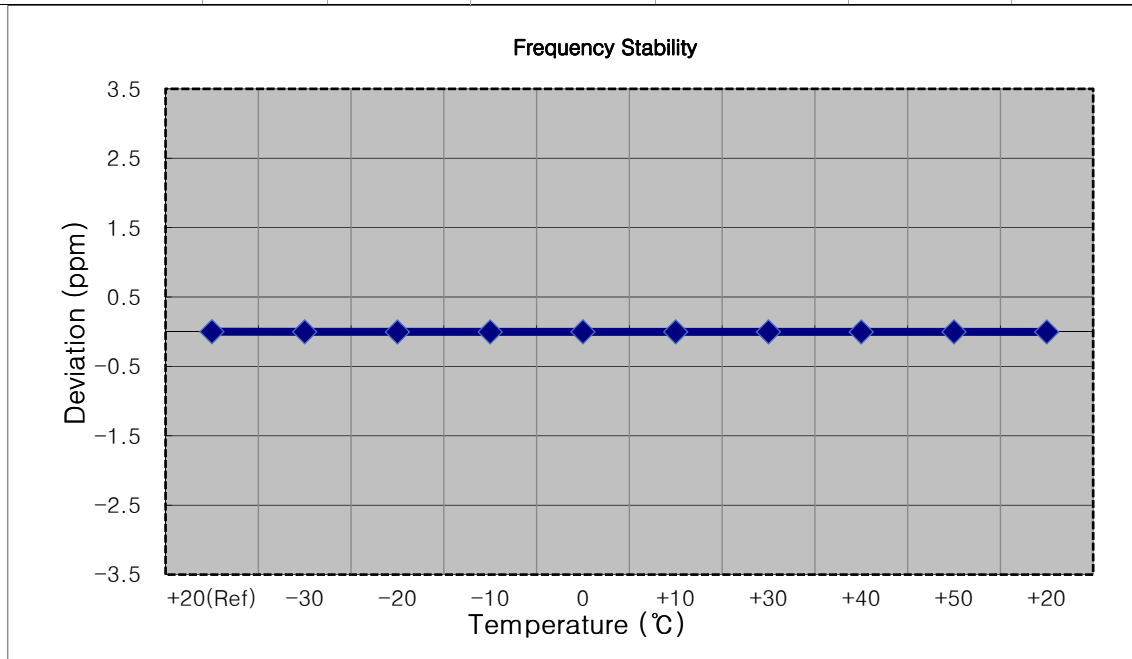

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2679 999 999	0.0	0.000 000	0.000
100 %		-30	2679 999 997	-2.0	0.000 000	-0.001
100 %		-20	2680 000 003	4.0	0.000 000	0.001
100 %		-10	2679 999 994	-4.4	0.000 000	-0.002
100 %		0	2680 000 001	1.9	0.000 000	0.001
100 %		+10	2679 999 991	-7.4	0.000 000	-0.003
100 %		+30	2679 999 994	-4.6	0.000 000	-0.002
100 %		+40	2679 999 995	-3.5	0.000 000	-0.001
100 %		+50	2679 999 993	-5.9	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2679 999 995	-4.0	0.000 000

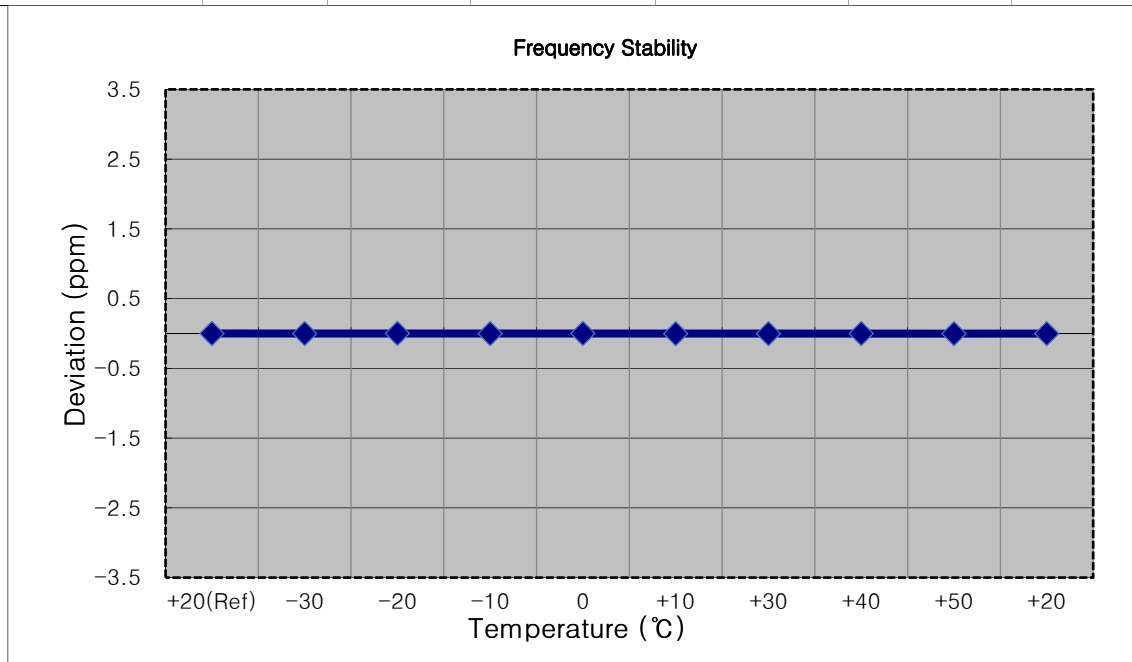

## 9. TEST DATA(Sub 5 Ant)

### 9.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2498.5	LTE B41/ 5 MHz	QPSK	-21.40	15.42	10.51	2.57	H	< 2.00	0.217	23.36	1	24
		16-QAM	-22.43	14.39	10.51	2.57	H		0.171	22.33		
		64-QAM	-23.47	13.35	10.51	2.57	H		0.135	21.29		
		256-QAM	-26.60	10.22	10.51	2.57	H		0.065	18.16		
2593.0		QPSK	-19.38	17.84	10.64	2.71	H		0.378	25.77	1	13
		16-QAM	-20.28	16.94	10.64	2.71	H		0.307	24.87		
		64-QAM	-21.32	15.90	10.64	2.71	H		0.242	23.83		
		256-QAM	-24.41	12.81	10.64	2.71	H		0.119	20.74		
2687.5		QPSK	-20.50	16.55	10.74	2.75	H		0.284	24.54	1	0
		16-QAM	-21.33	15.72	10.74	2.75	H		0.235	23.71		
		64-QAM	-22.37	14.68	10.74	2.75	H		0.185	22.67		
		256-QAM	-25.43	11.62	10.74	2.75	H		0.091	19.61		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2501.0	LTE B41/ 10 MHz	QPSK	-21.11	15.71	10.51	2.57	H	< 2.00	0.232	23.65	1	49
		16-QAM	-22.07	14.75	10.51	2.57	H		0.186	22.69		
		64-QAM	-23.09	13.73	10.51	2.57	H		0.147	21.67		
		256-QAM	-26.17	10.65	10.51	2.57	H		0.072	18.59		
2593.0		QPSK	-19.48	17.74	10.64	2.71	H		0.369	25.67	1	25
		16-QAM	-20.33	16.89	10.64	2.71	H		0.303	24.82		
		64-QAM	-21.35	15.87	10.64	2.71	H		0.240	23.80		
		256-QAM	-24.40	12.82	10.64	2.71	H		0.119	20.75		
2685.0		QPSK	-20.60	16.64	10.73	2.75	H		0.290	24.62	1	0
		16-QAM	-21.51	15.73	10.73	2.75	H		0.235	23.71		
		64-QAM	-22.53	14.71	10.73	2.75	H		0.186	22.69		
		256-QAM	-25.59	11.65	10.73	2.75	H		0.092	19.63		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2503.5	LTE B41/ 15 MHz	QPSK	-21.20	15.63	10.58	2.57	H	< 2.00	0.231	23.64	1	74
		16-QAM	-20.64	16.19	10.58	2.57	H		0.263	24.20		
		64-QAM	-21.68	15.15	10.58	2.57	H		0.207	23.16		
		256-QAM	-24.70	12.13	10.58	2.57	H		0.103	20.14		
2593.0		QPSK	-19.42	17.80	10.64	2.71	H		0.374	25.73	1	49
		16-QAM	-20.24	16.98	10.64	2.71	H		0.310	24.91		
		64-QAM	-21.33	15.89	10.64	2.71	H		0.241	23.82		
		256-QAM	-24.39	12.83	10.64	2.71	H		0.119	20.76		
2682.5		QPSK	-20.36	17.07	10.72	2.75	H		0.319	25.04	1	0
		16-QAM	-21.09	16.34	10.72	2.75	H		0.270	24.31		
		64-QAM	-22.18	15.25	10.72	2.75	H		0.210	23.22		
		256-QAM	-25.24	12.19	10.72	2.75	H		0.104	20.16		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
2506.0	LTE B41/ 20 MHz	QPSK	-20.47	16.36	10.58	2.57	H	< 2.00	0.274	24.37	1	99
		16-QAM	-21.28	15.55	10.58	2.57	H		0.227	23.56		
		64-QAM	-22.35	14.48	10.58	2.57	H		0.177	22.49		
		256-QAM	-25.42	11.41	10.58	2.57	H		0.087	19.42		
2593.0		QPSK	-19.47	17.75	10.64	2.71	H		0.370	25.68	1	50
		16-QAM	-20.39	16.83	10.64	2.71	H		0.299	24.76		
		64-QAM	-21.44	15.78	10.64	2.71	H		0.235	23.71		
		256-QAM	-24.48	12.74	10.64	2.71	H		0.117	20.67		
2680.0		QPSK	-20.69	16.74	10.72	2.75	H		0.296	24.71	1	0
		16-QAM	-21.43	16.00	10.72	2.75	H		0.249	23.97		
		64-QAM	-22.50	14.93	10.72	2.75	H		0.195	22.90		
		256-QAM	-25.57	11.86	10.72	2.75	H		0.096	19.83		



## 9.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>25.77 dBm = 0.378 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>5 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>50.77 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39675 (2498.5)	4 997.00	-54.81	12.56	-64.62	3.81	V	-55.87	81.64	1	24
	7 495.50	-55.89	10.78	-55.50	4.71	V	-49.43	75.20		
	9 994.00	-59.86	11.18	-55.44	5.52	V	-49.78	75.55		
40620 (2593.0)	5 186.00	-55.31	12.55	-64.08	3.82	V	-55.36	81.13	1	13
	7 779.00	-54.64	11.41	-54.81	4.79	H	-48.19	73.96		
	10 372.00	-58.61	11.43	-53.16	5.59	H	-47.32	73.09		
41565 (2687.5)	5 375.00	-56.78	13.06	-65.96	3.85	V	-56.74	82.51	1	0
	8 062.50	-55.96	10.74	-54.15	4.86	V	-48.27	74.04		
	10 750.00	-59.02	11.31	-54.01	5.65	H	-48.35	74.12		

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>25.67 dBm = 0.369 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>10 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>50.67 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39700 (2501.0)	5 002.00	-56.39	12.56	-66.20	3.81	V	-57.45	83.12	1	49
	7 503.00	-55.02	10.78	-54.94	4.71	H	-48.87	74.54		
	10 004.00	-58.32	11.22	-54.13	5.52	H	-48.44	74.11		
40620 (2593.0)	5 186.00	-56.51	12.55	-65.28	3.82	V	-56.56	82.23	1	25
	7 779.00	-53.91	11.41	-54.08	4.79	H	-47.46	73.13		
	10 372.00	-58.13	11.43	-52.68	5.59	H	-46.84	72.51		
41540 (2685.0)	5 370.00	-55.84	13.07	-64.94	3.85	H	-55.72	81.39	1	0
	8 055.00	-57.47	10.74	-55.65	4.87	V	-49.78	75.45		
	10 740.00	-57.80	11.32	-53.09	5.71	V	-47.48	73.15		

- ▣ OPERATING FREQUENCY : 2593.0 MHz
- ▣ MEASURED OUTPUT POWER: 25.73 dBm = 0.374 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT:  $55 + 10 \log_{10}(W) =$  50.73 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39725 (2503.5)	5 007.00	-55.77	12.55	-65.79	3.88	H	-57.12	82.85	1	74
	7 510.50	-47.24	10.78	-47.65	4.71	V	-41.58	67.31		
	10 014.00	-58.08	11.25	-53.84	5.53	H	-48.12	73.85		
40620 (2593.0)	5 186.00	-56.83	12.55	-65.60	3.82	V	-56.88	82.61	1	38
	7 779.00	-46.63	11.41	-46.80	4.79	H	-40.18	65.91		
	10 372.00	-57.47	11.43	-52.02	5.59	H	-46.18	71.91		
41515 (2682.5)	5 365.00	-55.89	13.08	-64.88	3.86	H	-55.65	81.38	1	0
	8 047.50	-49.80	10.73	-47.97	4.87	V	-42.11	67.84		
	10 730.00	-57.79	11.33	-53.34	5.78	H	-47.79	73.52		

▣ OPERATING FREQUENCY :	<u>2593.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>25.68 dBm = 0.370 W</u>
▣ MODE:	<u>LTE B41</u>
▣ MODULATION SIGNAL:	<u>20 MHz QPSK</u>
▣ DISTANCE:	<u>1 meters</u>
▣ LIMIT: $55 + 10 \log_{10}(W) =$	<u>50.68 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
39750 (2506.0)	5 012.00	-56.08	12.55	-66.10	3.88	V	-57.43	83.11	1	99
	7 518.00	-54.62	10.82	-55.32	4.71	H	-49.21	74.89		
	10 024.00	-58.07	11.29	-53.85	5.54	H	-48.09	73.77		
40620 (2593.0)	5 186.00	-56.49	12.55	-65.26	3.82	V	-56.54	82.22	1	50
	7 779.00	-46.33	11.41	-46.50	4.79	V	-39.88	65.56		
	10 372.00	-58.22	11.43	-52.77	5.59	H	-46.93	72.61		
41490 (2680.0)	5 360.00	-55.47	13.09	-64.34	3.86	H	-55.11	80.79	1	0
	8 040.00	-53.06	10.73	-51.27	4.86	H	-45.40	71.08		
	10 720.00	-57.68	11.33	-53.31	5.81	H	-47.79	73.47		

### 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
41	5 MHz	2593.0	QPSK	25	0	4.79
			16-QAM			6.11
			64-QAM			6.76
			256-QAM			6.96
	10 MHz		QPSK	50		4.80
			16-QAM			5.82
			64-QAM			6.94
			256-QAM			6.92
	15 MHz		QPSK	75		4.72
			16-QAM			5.84
			64-QAM			6.30
			256-QAM			6.84
	20 MHz		QPSK	100		4.73
			16-QAM			5.71
			64-QAM			6.24
			256-QAM			7.12

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 199 ~ 214.

#### 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5050
			16-QAM			4.5218
			64-QAM			4.5060
			256-QAM			4.5037
	10 MHz		QPSK	50		8.9758
			16-QAM			9.0044
			64-QAM			9.0183
			256-QAM			9.0083
	15 MHz		QPSK	75		13.478
			16-QAM			13.472
			64-QAM			13.468
			256-QAM			13.473
	20 MHz		QPSK	100		17.942
			16-QAM			17.904
			64-QAM			17.970
			256-QAM			17.986

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 183 ~ 198.

### 9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	3.6850	31.955	-66.943	-34.988	-25.00
		2593.0	3.6965	31.955	-67.099	-35.144	
		2687.5	3.7039	31.955	-67.198	-35.243	
	10	2501.0	3.7054	31.955	-67.120	-35.165	
		2593.0	3.6895	31.955	-67.191	-35.236	
		2685.0	3.6980	31.955	-67.072	-35.117	
	15	2503.5	3.7094	31.955	-66.989	-35.034	
		2593.0	3.7154	31.955	-67.109	-35.154	
		2682.5	3.6800	31.955	-66.926	-34.971	
	20	2506.0	3.6616	31.955	-67.084	-35.129	
		2593.0	3.7054	31.955	-66.980	-35.025	
		2680.0	3.7054	31.955	-66.727	-34.772	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 215 ~ 238.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Duty Cycle factor already applied on the factor.
  - Duty Cycle factor(dB) = 3.979
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor

Frequency Range (GHz)	Factor [dB]
0.03 - 1	29.249
1 - 5	31.955
5 - 10	32.570
10 - 15	33.095
15 - 20	33.468
Above 20	34.110

## 9.6 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1 MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-21.48	-20.22	-17.77	-17.29	-34.57	-32.80	-34.05
10 MHz	2501.0	QPSK	50/0	-26.11	-24.57	-22.79	-21.29	-29.89	-26.77	-38.01
15 MHz	2503.5	QPSK	75/0	-28.98	-27.14	-26.45	-24.57	-31.53	-28.84	-38.84
20 MHz	2506.0	QPSK	100/0	-29.37	-27.25	-27.43	-25.22	-32.06	-29.17	-38.80
Limit(dBm)				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1 MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-22.11	-22.18	-20.24	-20.56
	2687.5	QPSK	25	0	-21.95	-21.99	-19.02	-19.37
10 MHz	2593.0	QPSK	50	0	-24.30	-23.85	-20.98	-21.39
	2685.0	QPSK	50	0	-24.22	-24.46	-20.57	-20.86
15 MHz	2593.0	QPSK	75	0	-25.29	-25.30	-22.74	-22.63
	2682.5	QPSK	75	0	-24.83	-25.10	-22.14	-22.50
20 MHz	2593.0	QPSK	100	0	-25.28	-25.42	-22.73	-22.65
	2680.0	QPSK	100	0	-24.60	-24.73	-22.55	-22.56
Limit(dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-34.03	-35.26	-35.88	-36.47
	2687.5	QPSK	25	0	-34.07	-35.65	-35.41	-36.86
10 MHz	2593.0	QPSK	50	0	-27.12	-27.01	-37.11	-37.61
	2685.0	QPSK	50	0	-26.29	-26.99	-36.65	-37.94
15 MHz	2593.0	QPSK	75	0	-26.91	-27.17	-37.69	-38.34
	2682.5	QPSK	75	0	-26.44	-27.00	-37.57	-38.33
20 MHz	2593.0	QPSK	100	0	-27.23	-27.26	-38.02	-38.64
	2680.0	QPSK	100	0	-26.47	-27.01	-37.80	-38.46
Limit(dBm)					-13.0		-25.0	

## Note:


- C.E = Channel Edge
- X = X is the greater of 6 MHz or the actual emission bandwidth.
- X = 6 MHz(5 MHz Bandwidth), 10 MHz(10 MHz Bandwidth), 15 MHz(15 MHz Bandwidth), 20 MHz(20 MHz Bandwidth)
- RB = Resource Block
- Duty Cycle factor already applied on the factor.
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
  - Duty Cycle Factor(dB) = 3.979
- Plots of the EUT's Channel Edge are shown Page 155 ~ 182. (1RB & Full RB)



### 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2498,500,000 Hz
- ▣ BANDWIDTH: 39675 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2498 500 005	0.0	0.000 000	0.000
100 %		-30	2498 500 013	7.3	0.000 000	0.003
100 %		-20	2498 500 009	4.0	0.000 000	0.002
100 %		-10	2498 500 012	6.7	0.000 000	0.003
100 %		0	2498 500 013	7.7	0.000 000	0.003
100 %		+10	2498 500 014	8.6	0.000 000	0.003
100 %		+30	2498 500 013	7.4	0.000 000	0.003
100 %		+40	2498 500 013	7.5	0.000 000	0.003
100 %		+50	2498 500 014	9.0	0.000 000	0.004
Batt. Endpoint		3.300	+20	2498 500 010	4.7	0.000 000

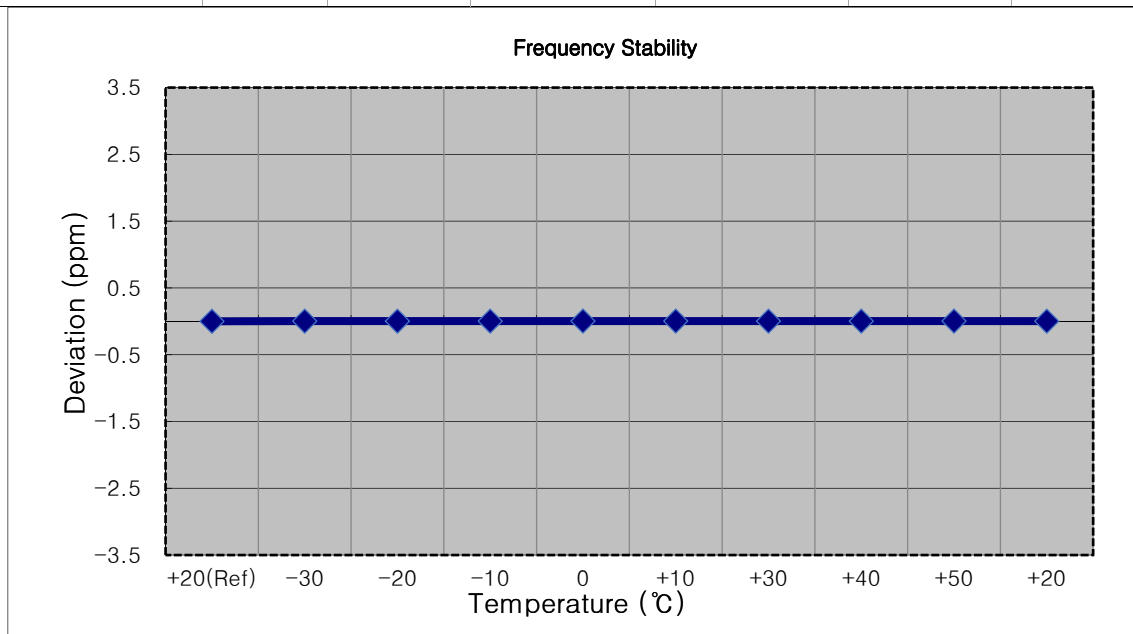


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2501,000,000 Hz
- ▣ BANDWIDTH: 39700 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2500 999 996	0.0	0.000 000	0.000
100 %		-30	2500 999 993	-2.5	0.000 000	-0.001
100 %		-20	2500 999 993	-3.0	0.000 000	-0.001
100 %		-10	2500 999 999	3.0	0.000 000	0.001
100 %		0	2500 999 993	-2.2	0.000 000	-0.001
100 %		+10	2500 999 992	-3.8	0.000 000	-0.002
100 %		+30	2500 999 993	-2.5	0.000 000	-0.001
100 %		+40	2500 999 992	-3.2	0.000 000	-0.001
100 %		+50	2500 999 998	2.1	0.000 000	0.001
Batt. Endpoint		3.300	+20	2500 999 992	-3.8	0.000 000

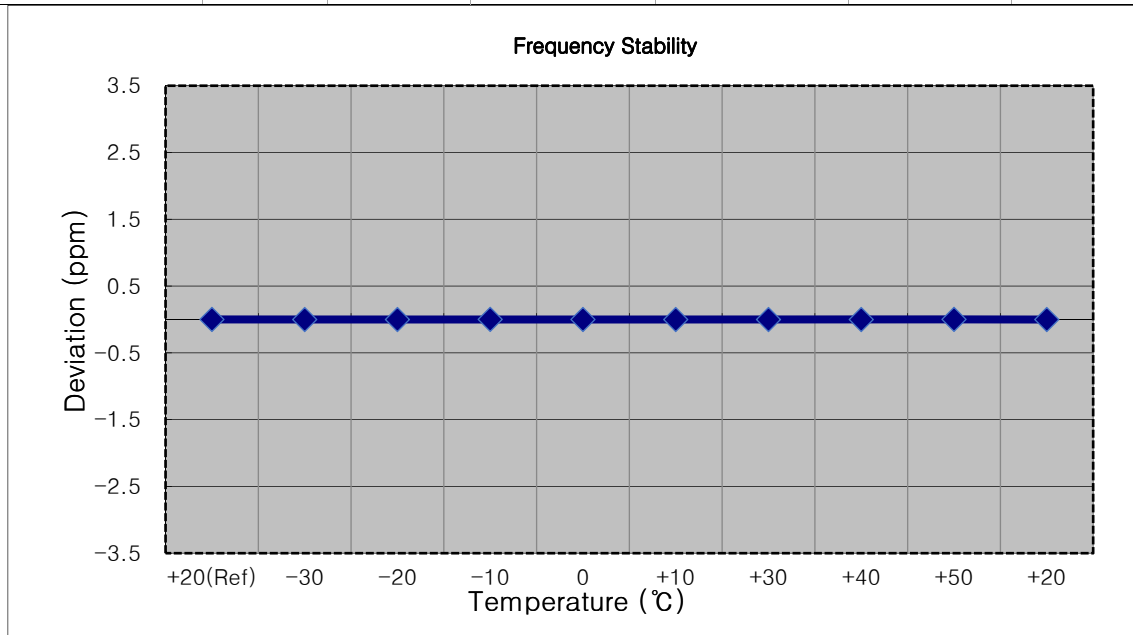


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2503,500,000 Hz
- ▣ BANDWIDTH: 39725 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2503 499 998	0.0	0.000 000	0.000
100 %		-30	2503 500 001	2.9	0.000 000	0.001
100 %		-20	2503 499 995	-3.2	0.000 000	-0.001
100 %		-10	2503 499 995	-3.1	0.000 000	-0.001
100 %		0	2503 500 001	2.9	0.000 000	0.001
100 %		+10	2503 499 999	1.6	0.000 000	0.001
100 %		+30	2503 499 995	-2.3	0.000 000	-0.001
100 %		+40	2503 499 995	-3.0	0.000 000	-0.001
100 %		+50	2503 499 995	-2.8	0.000 000	-0.001
Batt. Endpoint		3.300	+20	2503 499 995	-2.6	0.000 000

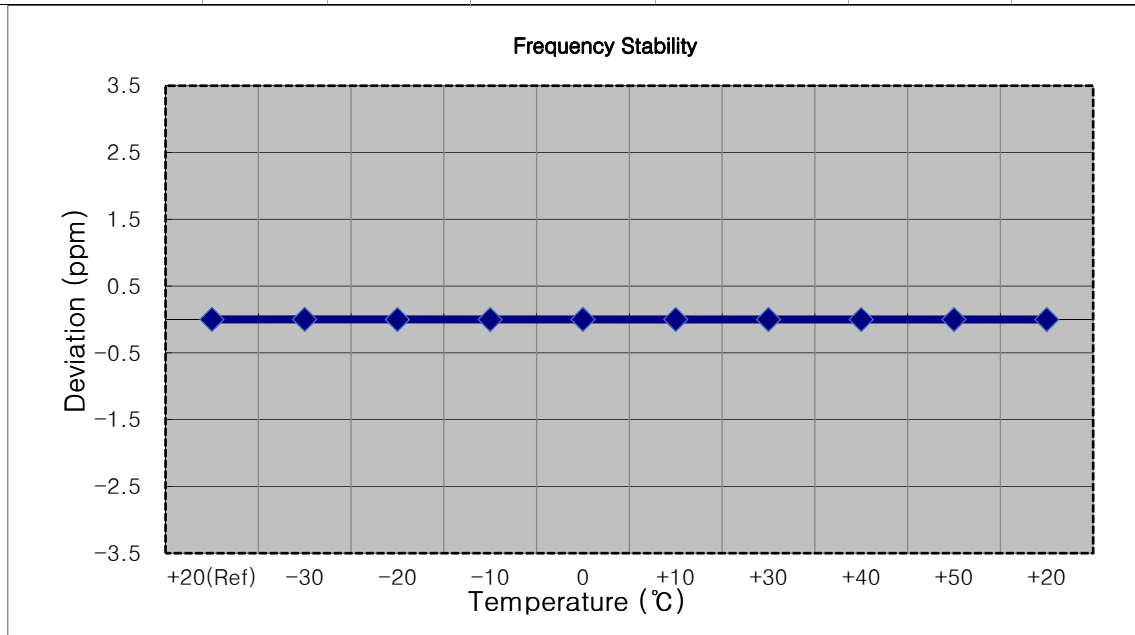


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2506,000,000 Hz
- ▣ BANDWIDTH: 39750 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2506 000 003	0.0	0.000 000	0.000
100 %		-30	2506 000 007	3.8	0.000 000	0.002
100 %		-20	2506 000 005	2.1	0.000 000	0.001
100 %		-10	2506 000 006	2.9	0.000 000	0.001
100 %		0	2506 000 006	3.2	0.000 000	0.001
100 %		+10	2506 000 005	1.8	0.000 000	0.001
100 %		+30	2506 000 005	2.3	0.000 000	0.001
100 %		+40	2506 000 005	2.3	0.000 000	0.001
100 %		+50	2506 000 004	1.4	0.000 000	0.001
Batt. Endpoint		3.300	+20	2506 000 007	4.2	0.000 000

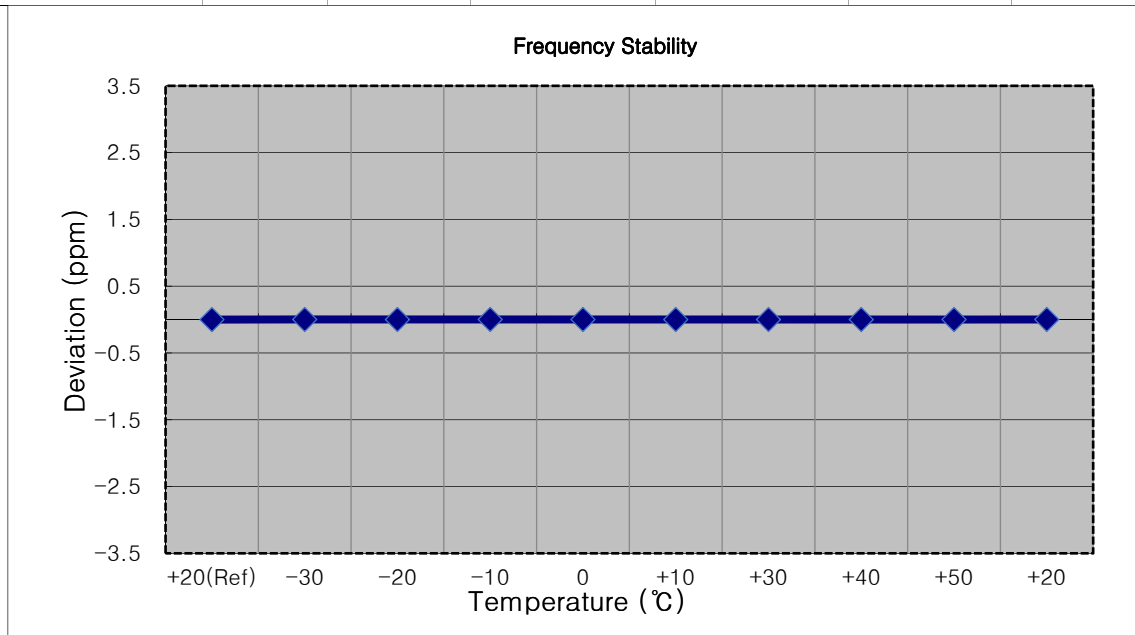


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 997	0.0	0.000 000	0.000
100 %		-30	2593 000 002	4.4	0.000 000	0.002
100 %		-20	2593 000 000	3.1	0.000 000	0.001
100 %		-10	2593 000 001	3.7	0.000 000	0.001
100 %		0	2593 000 000	2.5	0.000 000	0.001
100 %		+10	2593 000 001	4.0	0.000 000	0.002
100 %		+30	2593 000 004	6.6	0.000 000	0.003
100 %		+40	2593 000 001	4.1	0.000 000	0.002
100 %		+50	2593 000 002	4.9	0.000 000	0.002
Batt. Endpoint		3.300	+20	2593 000 000	2.8	0.000 000

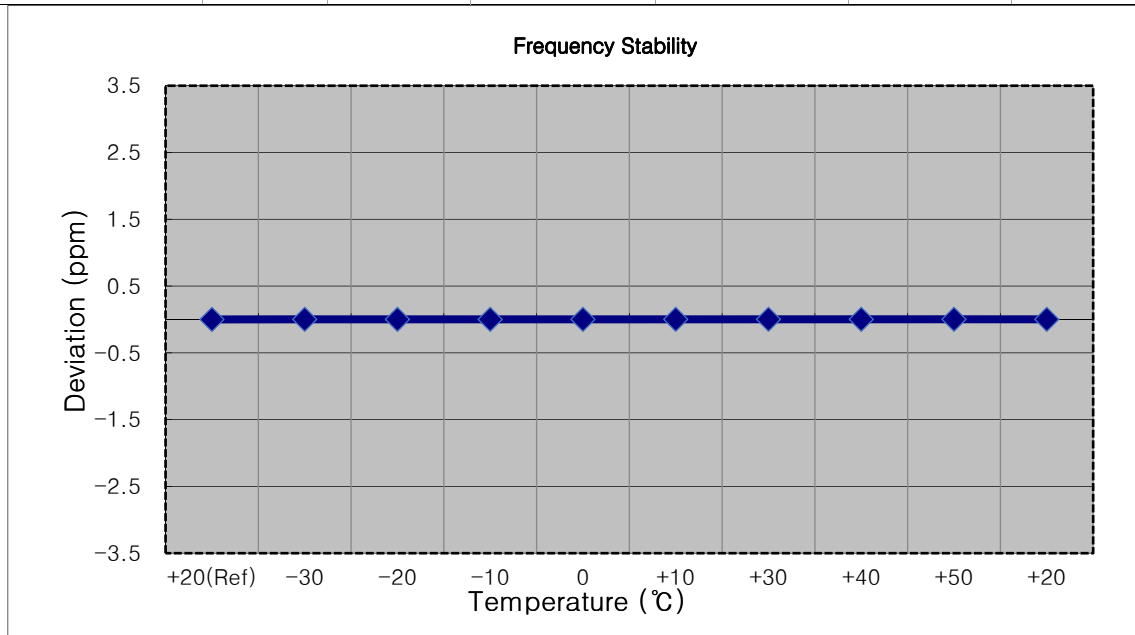


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 003	0.0	0.000 000	0.000
100 %		-30	2593 000 006	2.9	0.000 000	0.001
100 %		-20	2593 000 006	2.9	0.000 000	0.001
100 %		-10	2593 000 005	1.8	0.000 000	0.001
100 %		0	2593 000 000	-3.3	0.000 000	-0.001
100 %		+10	2593 000 006	3.0	0.000 000	0.001
100 %		+30	2593 000 008	4.9	0.000 000	0.002
100 %		+40	2593 000 001	-1.7	0.000 000	-0.001
100 %		+50	2593 000 009	5.7	0.000 000	0.002
Batt. Endpoint		3.300	+20	2593 000 000	-3.1	0.000 000

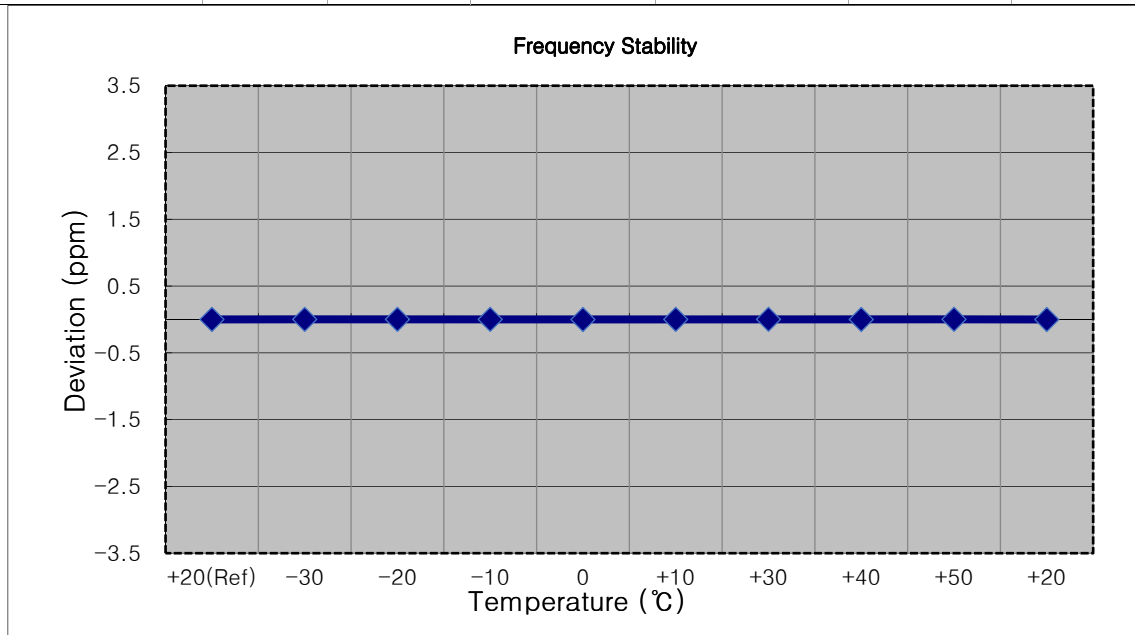


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2593 000 001	0.0	0.000 000	0.000
100 %		-30	2592 999 998	-3.8	0.000 000	-0.001
100 %		-20	2593 000 004	2.9	0.000 000	0.001
100 %		-10	2592 999 998	-3.6	0.000 000	-0.001
100 %		0	2593 000 006	4.3	0.000 000	0.002
100 %		+10	2593 000 005	3.3	0.000 000	0.001
100 %		+30	2592 999 997	-4.0	0.000 000	-0.002
100 %		+40	2593 000 003	1.8	0.000 000	0.001
100 %		+50	2592 999 997	-4.0	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2592 999 998	-3.7	0.000 000

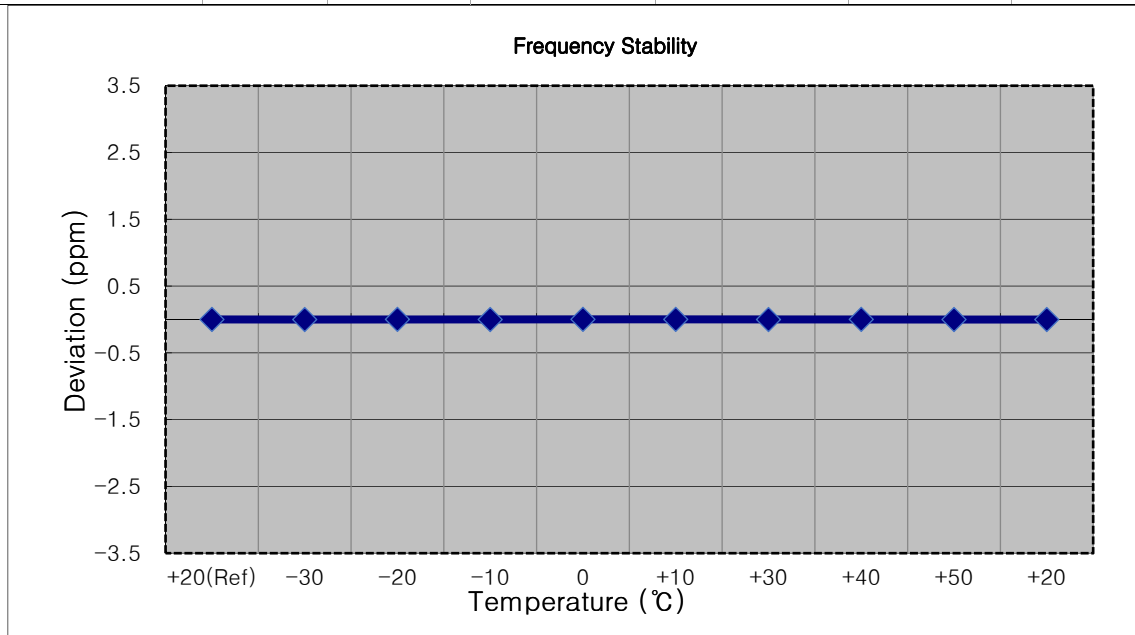

- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2593,000,000 Hz
- ▣ BANDWIDTH: 40620 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2592 999 997	0.0	0.000 000	0.000
100 %		-30	2592 999 996	-1.5	0.000 000	-0.001
100 %		-20	2593 000 000	2.5	0.000 000	0.001
100 %		-10	2592 999 995	-2.4	0.000 000	-0.001
100 %		0	2592 999 999	2.1	0.000 000	0.001
100 %		+10	2592 999 994	-3.2	0.000 000	-0.001
100 %		+30	2592 999 994	-3.2	0.000 000	-0.001
100 %		+40	2592 999 993	-4.1	0.000 000	-0.002
100 %		+50	2592 999 996	-1.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	2592 999 994	-2.7	0.000 000

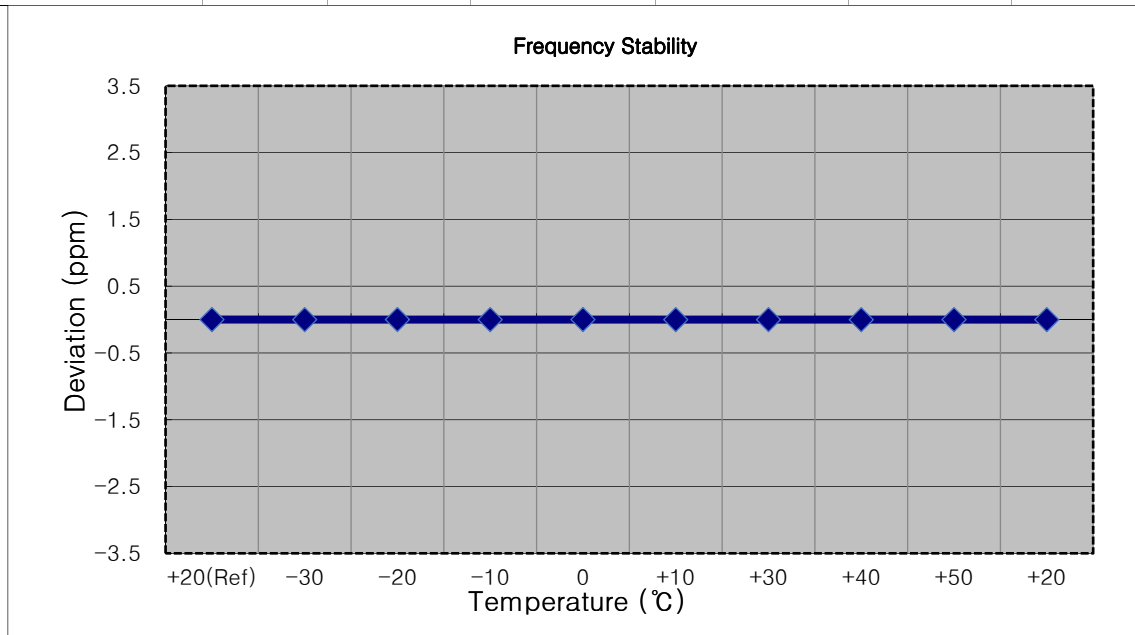




- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2687,500,000 Hz
- ▣ BANDWIDTH: 41565 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2687 499 992	0.0	0.000 000	0.000
100 %		-30	2687 499 988	-4.6	0.000 000	-0.002
100 %		-20	2687 499 997	5.1	0.000 000	0.002
100 %		-10	2687 499 987	-4.8	0.000 000	-0.002
100 %		0	2687 499 987	-4.8	0.000 000	-0.002
100 %		+10	2687 499 987	-5.5	0.000 000	-0.002
100 %		+30	2687 499 988	-4.0	0.000 000	-0.001
100 %		+40	2687 499 988	-4.3	0.000 000	-0.002
100 %		+50	2687 499 988	-4.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2687 499 987	-4.9	0.000 000

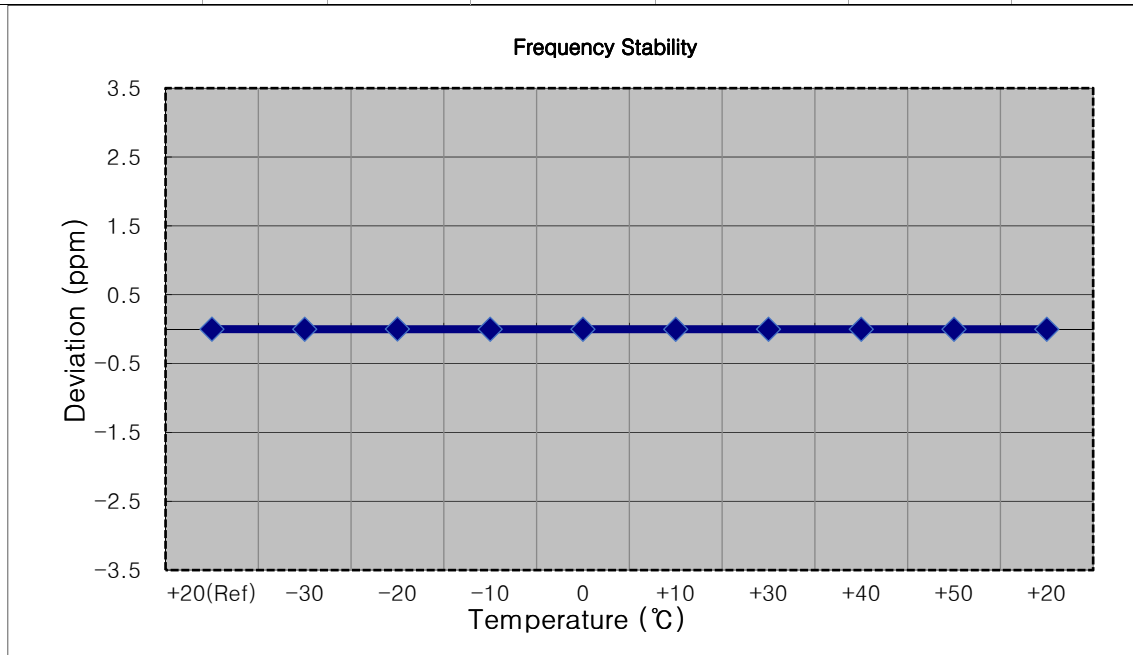


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2685,000,000 Hz
- ▣ BANDWIDTH: 41540 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2684 999 993	0.0	0.000 000	0.000
100 %		-30	2684 999 987	-6.0	0.000 000	-0.002
100 %		-20	2684 999 988	-5.6	0.000 000	-0.002
100 %		-10	2684 999 990	-3.7	0.000 000	-0.001
100 %		0	2684 999 990	-3.3	0.000 000	-0.001
100 %		+10	2684 999 991	-2.6	0.000 000	-0.001
100 %		+30	2684 999 988	-5.0	0.000 000	-0.002
100 %		+40	2684 999 987	-5.8	0.000 000	-0.002
100 %		+50	2684 999 988	-4.8	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2684 999 990	-3.0	0.000 000

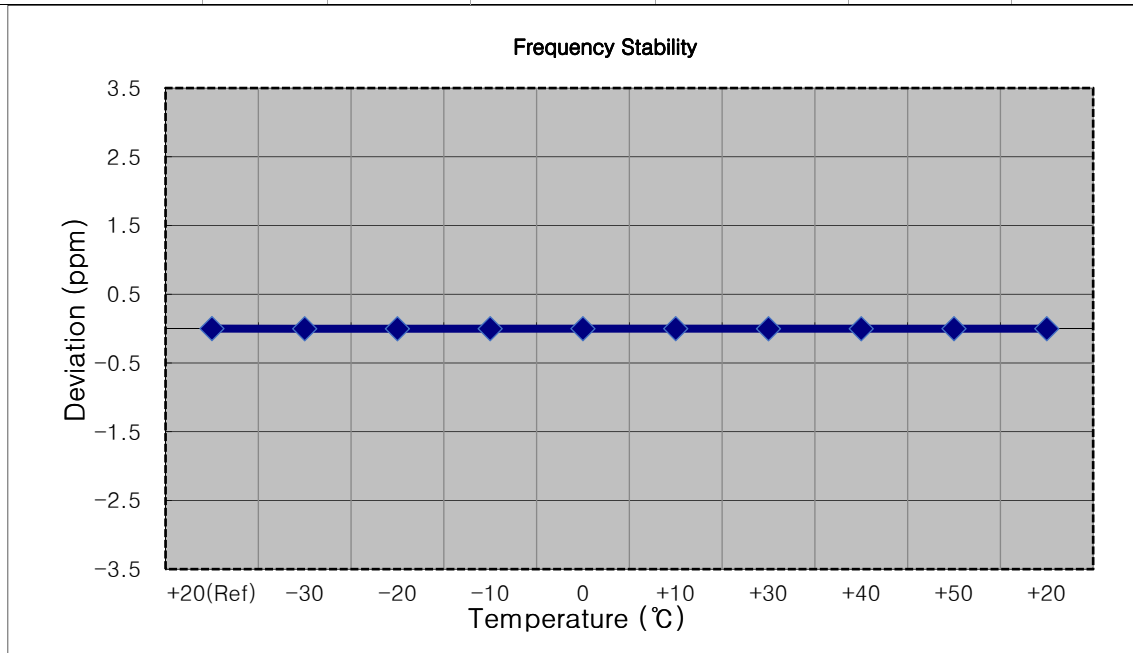


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2682,500,000 Hz
- ▣ BANDWIDTH: 41515 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2682 499 994	0.0	0.000 000	0.000
100 %		-30	2682 499 988	-6.0	0.000 000	-0.002
100 %		-20	2682 499 988	-6.0	0.000 000	-0.002
100 %		-10	2682 499 986	-7.5	0.000 000	-0.003
100 %		0	2682 499 988	-5.2	0.000 000	-0.002
100 %		+10	2682 499 986	-7.3	0.000 000	-0.003
100 %		+30	2682 499 988	-5.6	0.000 000	-0.002
100 %		+40	2682 499 986	-8.1	0.000 000	-0.003
100 %		+50	2682 499 989	-4.3	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2682 499 987	-7.0	0.000 000

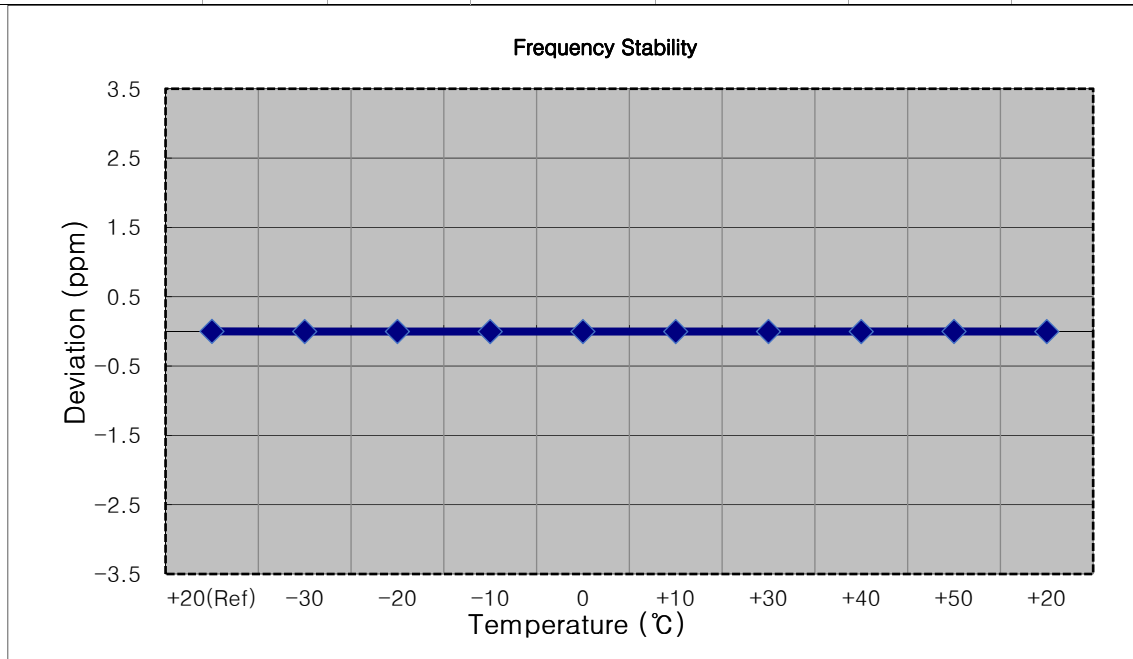


- ▣ MODE: LTE 41
- ▣ OPERATING FREQUENCY: 2680,000,000 Hz
- ▣ BANDWIDTH: 41490 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	2679 999 998	0.0	0.000 000	0.000
100 %		-30	2680 000 000	2.5	0.000 000	0.001
100 %		-20	2680 000 001	3.6	0.000 000	0.001
100 %		-10	2679 999 995	-2.6	0.000 000	-0.001
100 %		0	2680 000 000	2.3	0.000 000	0.001
100 %		+10	2679 999 994	-4.0	0.000 000	-0.001
100 %		+30	2679 999 993	-4.6	0.000 000	-0.002
100 %		+40	2679 999 994	-3.8	0.000 000	-0.001
100 %		+50	2679 999 994	-4.1	0.000 000	-0.002
Batt. Endpoint		3.300	+20	2679 999 994	-3.4	0.000 000

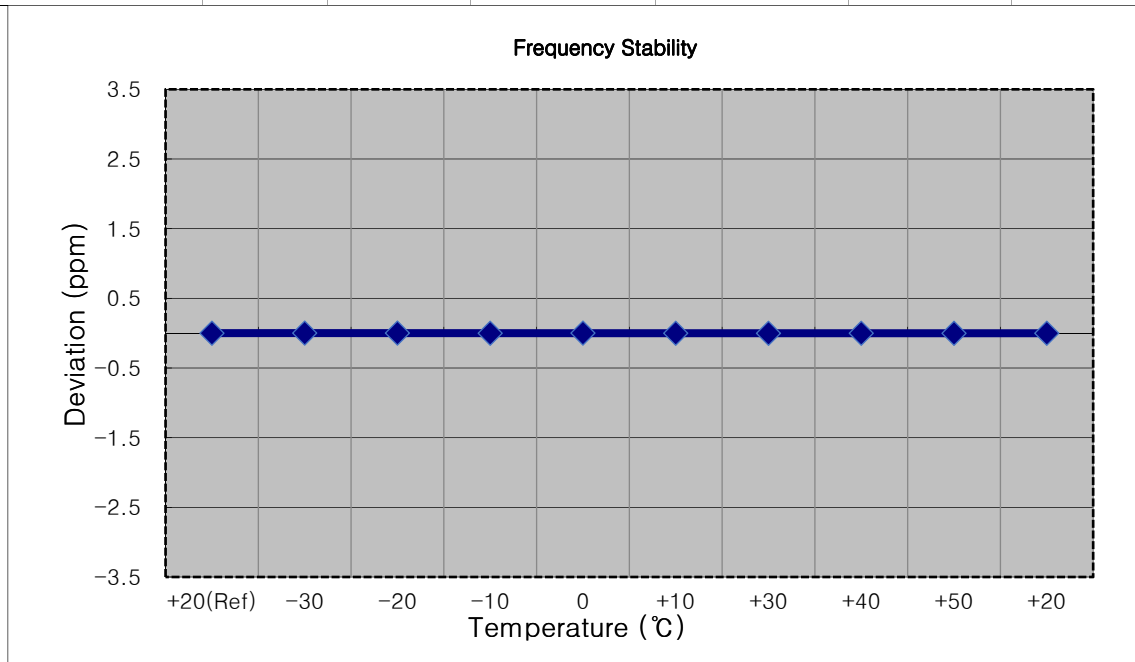


## 10. TEST PLOTS(Main 2 Ant)


LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_FullRB

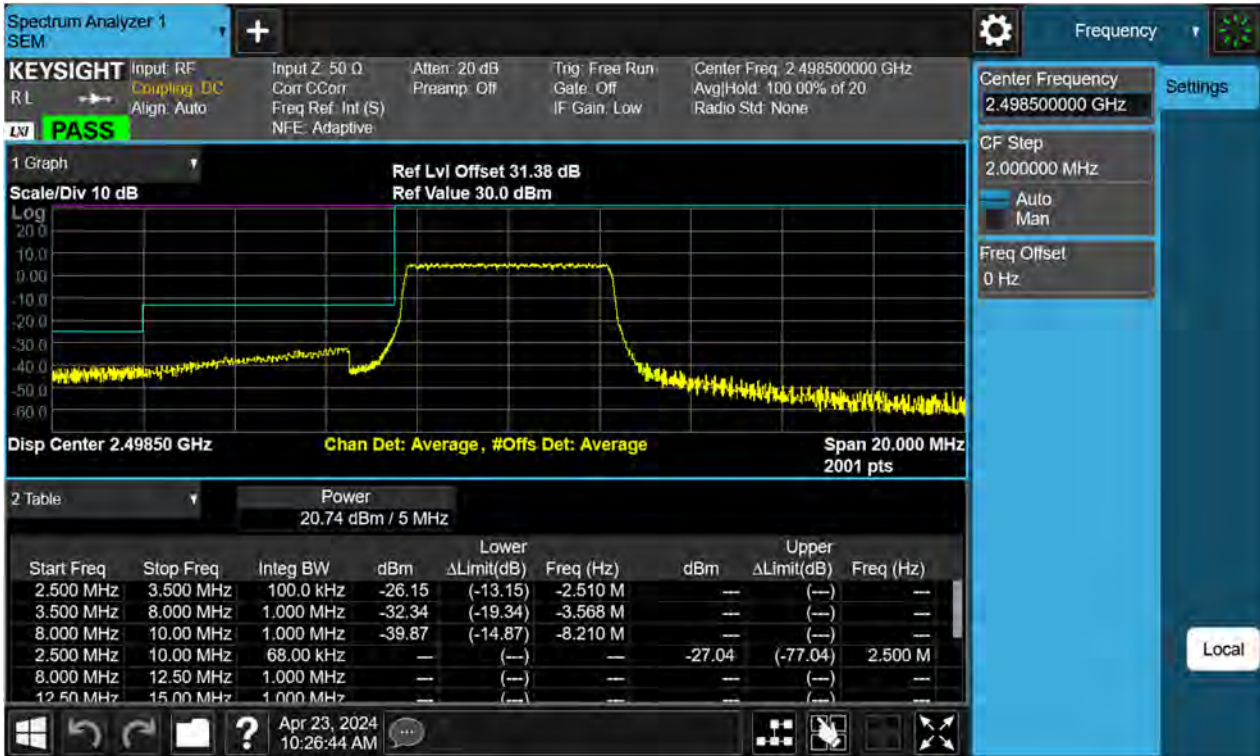

LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_FullRB

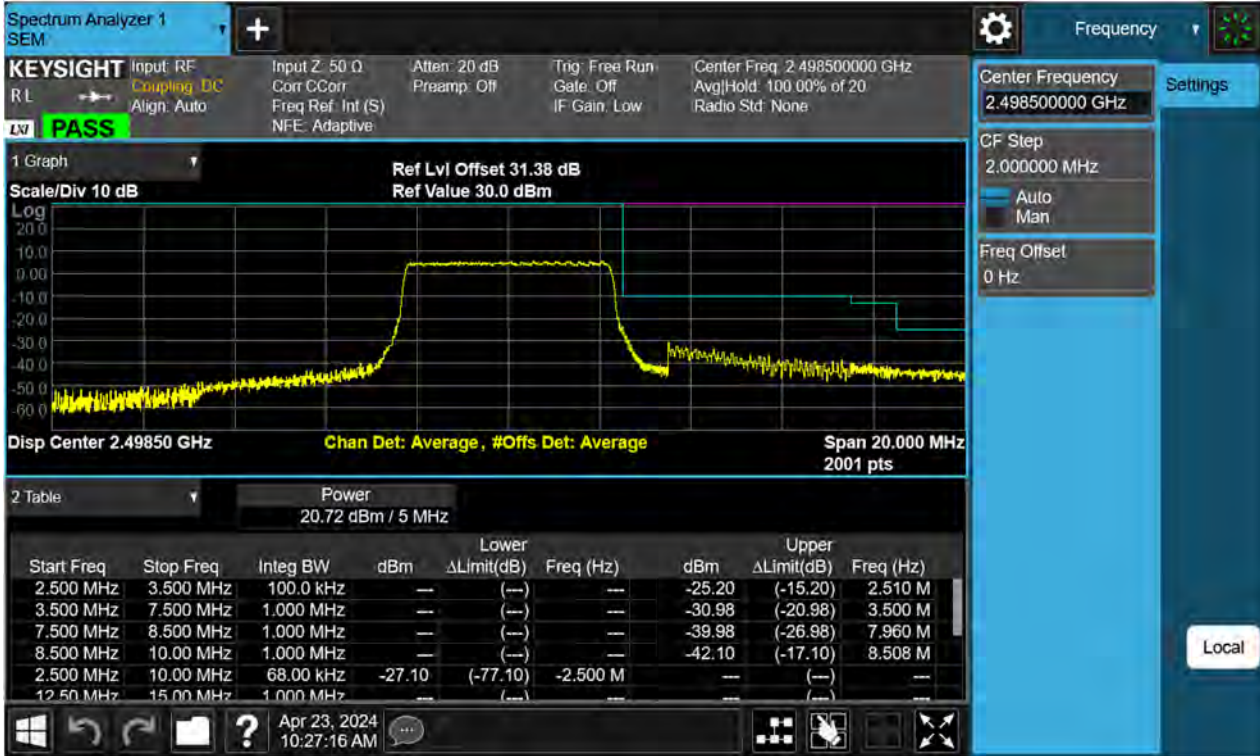


LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_1RB

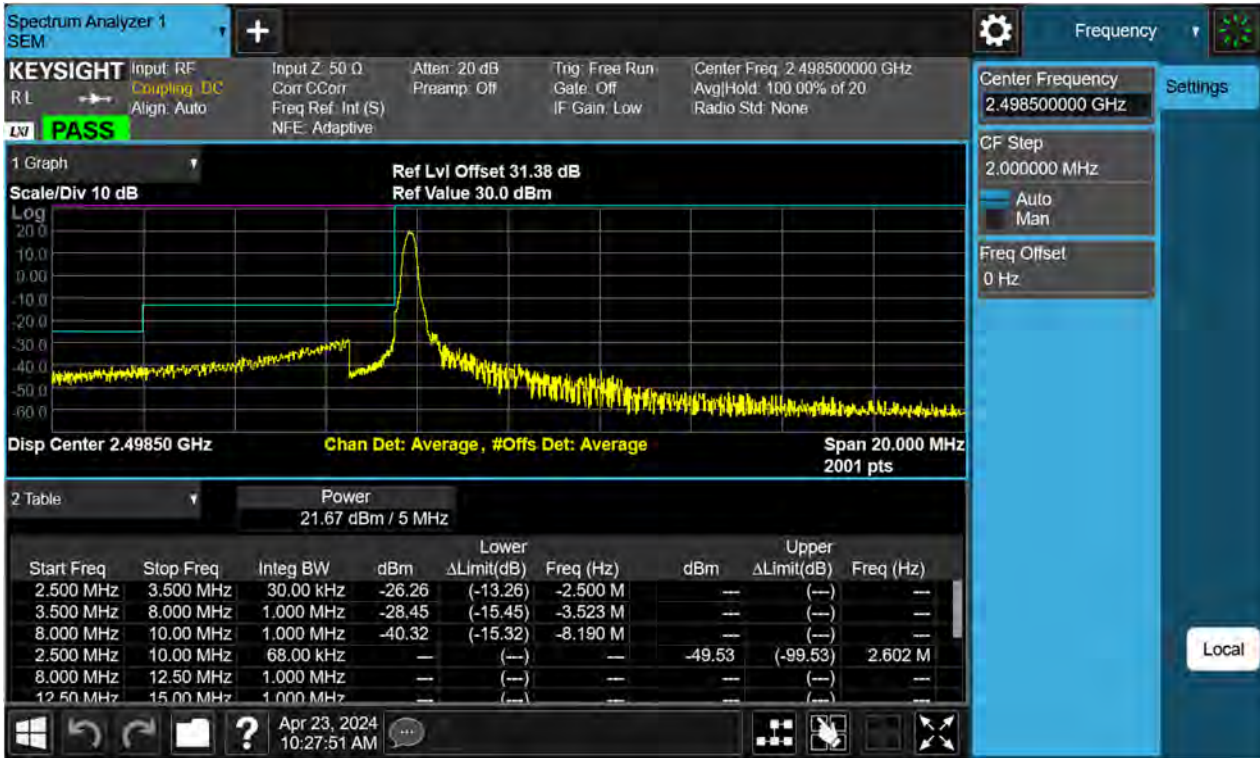





LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_1RB

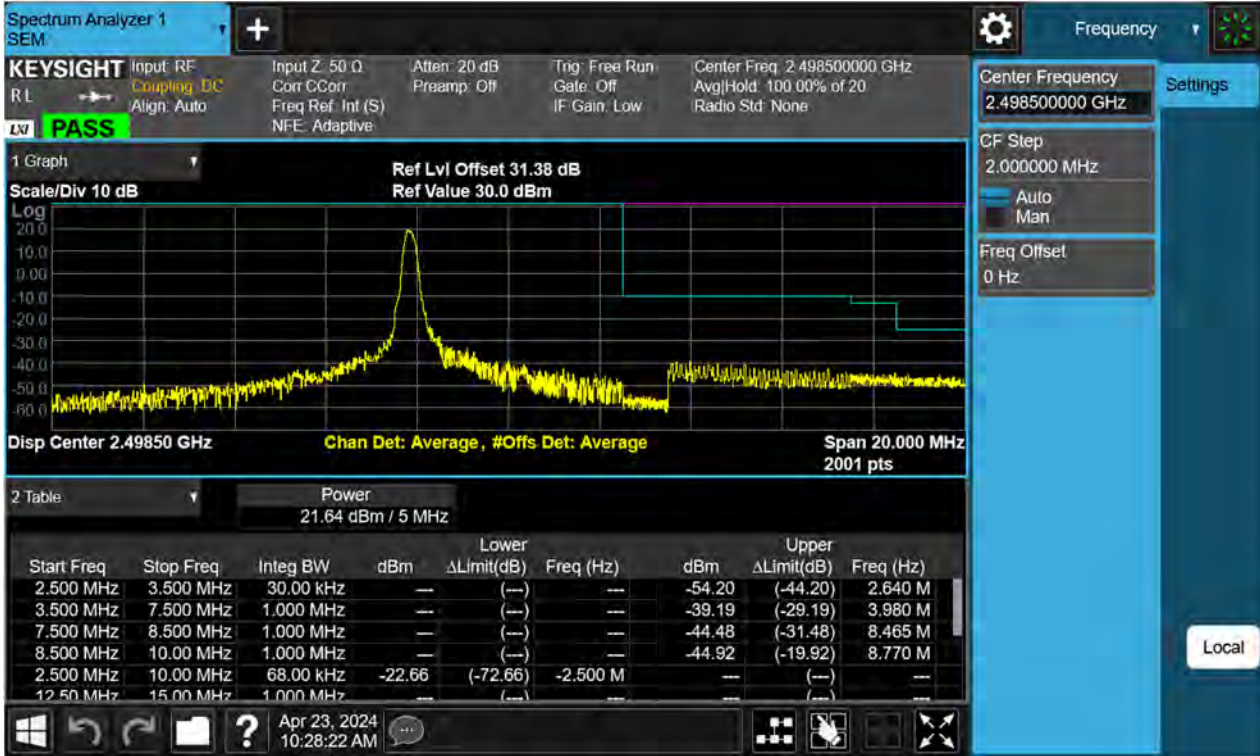


LTE41\_5 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB

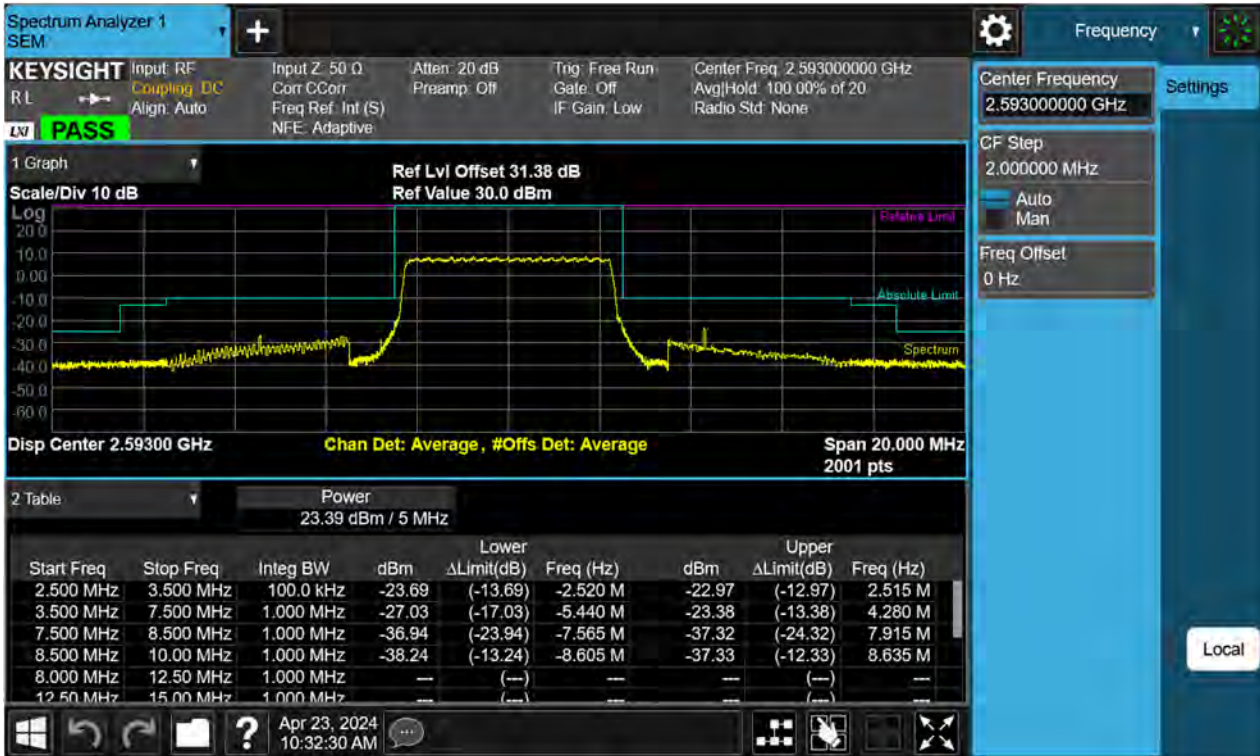

LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_FullRB

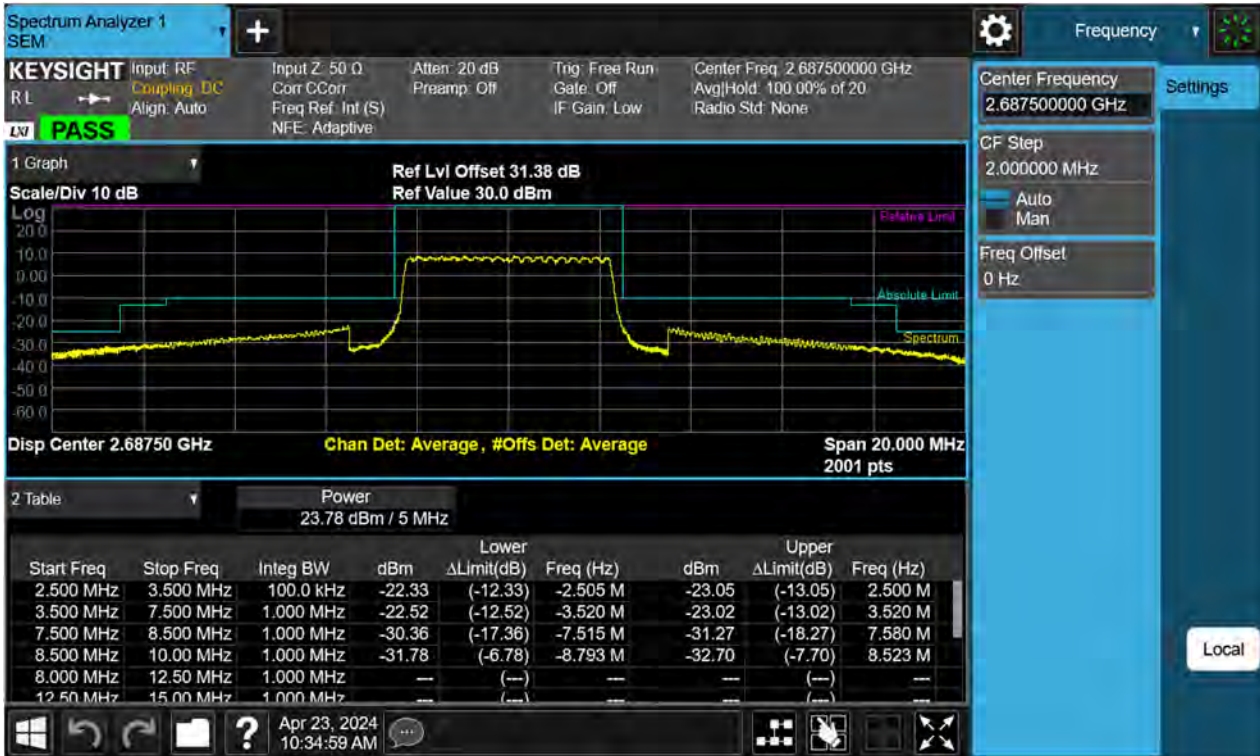


LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_1RB

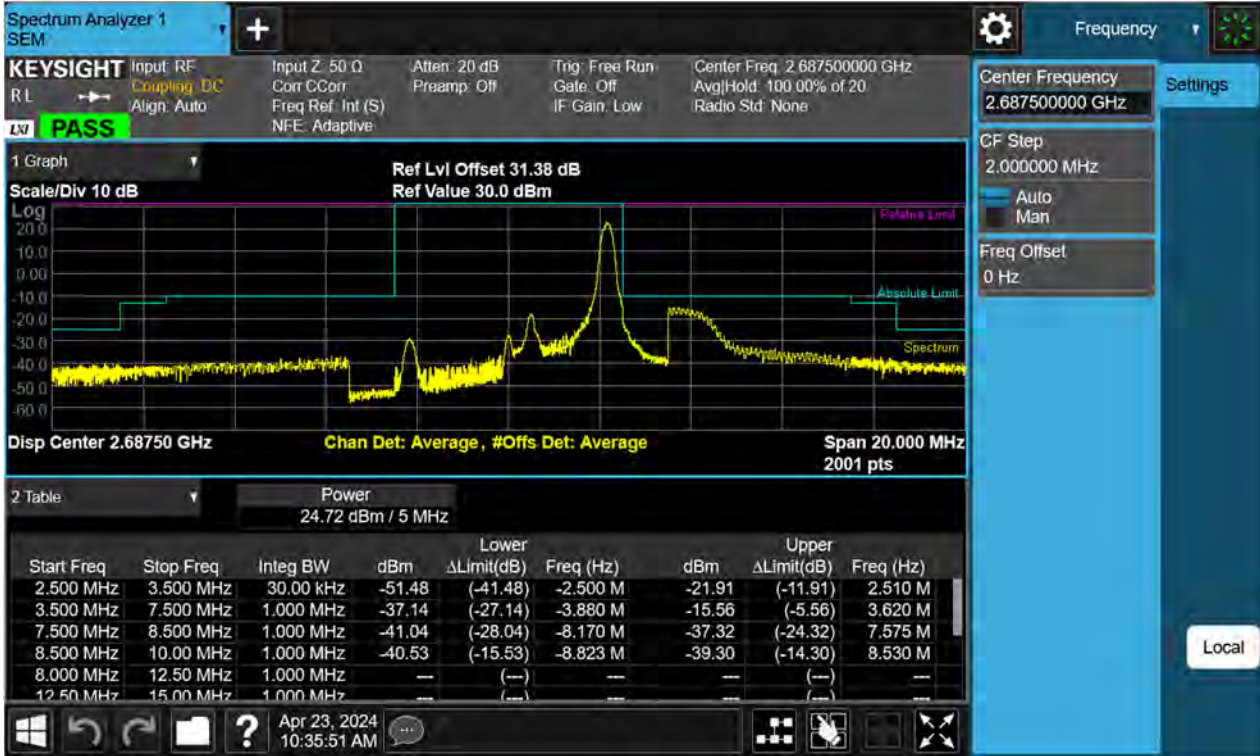





LTE41\_10 M\_BandEdge\_Lower\_Low\_2501 MHz\_QPSK\_FullRB

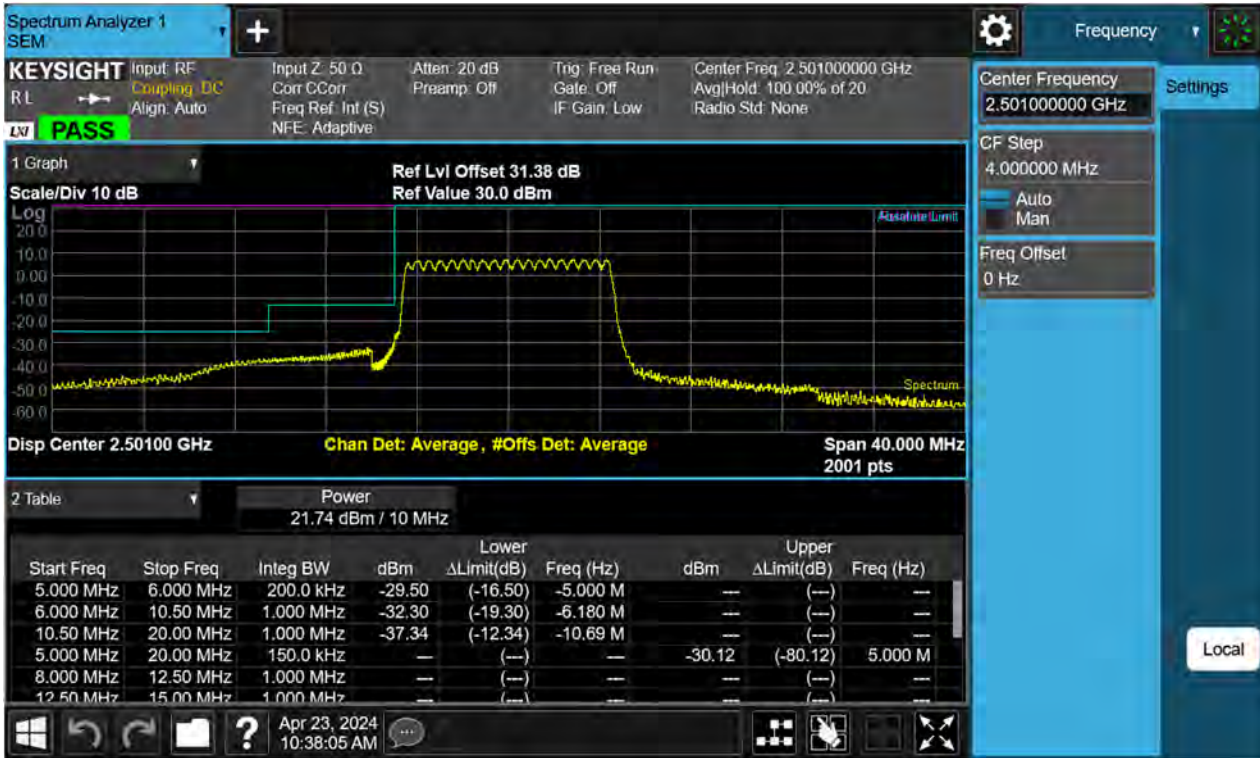


LTE41\_10 M\_BandEdge\_Upper\_Low\_2501 MHz\_QPSK\_FullRB

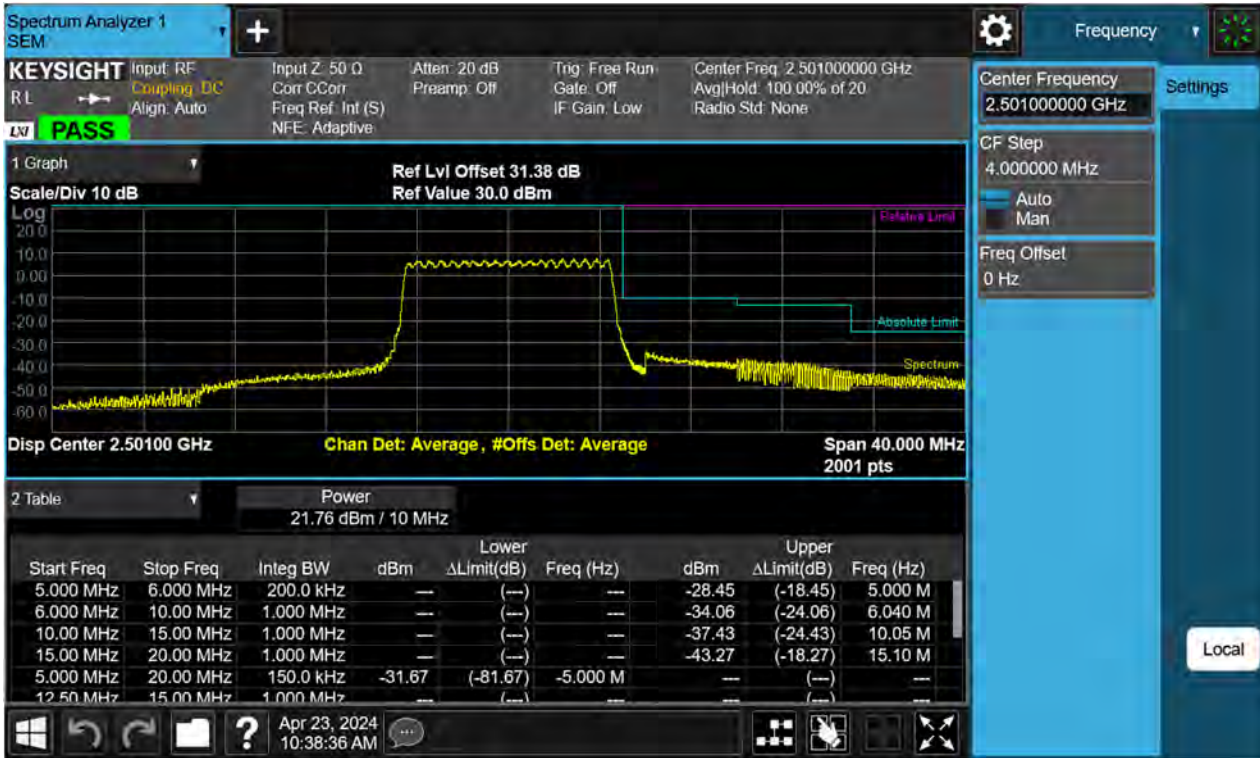

LTE41\_10 M\_BandEdge\_Lower\_Low\_2501 MHz\_QPSK\_1RB

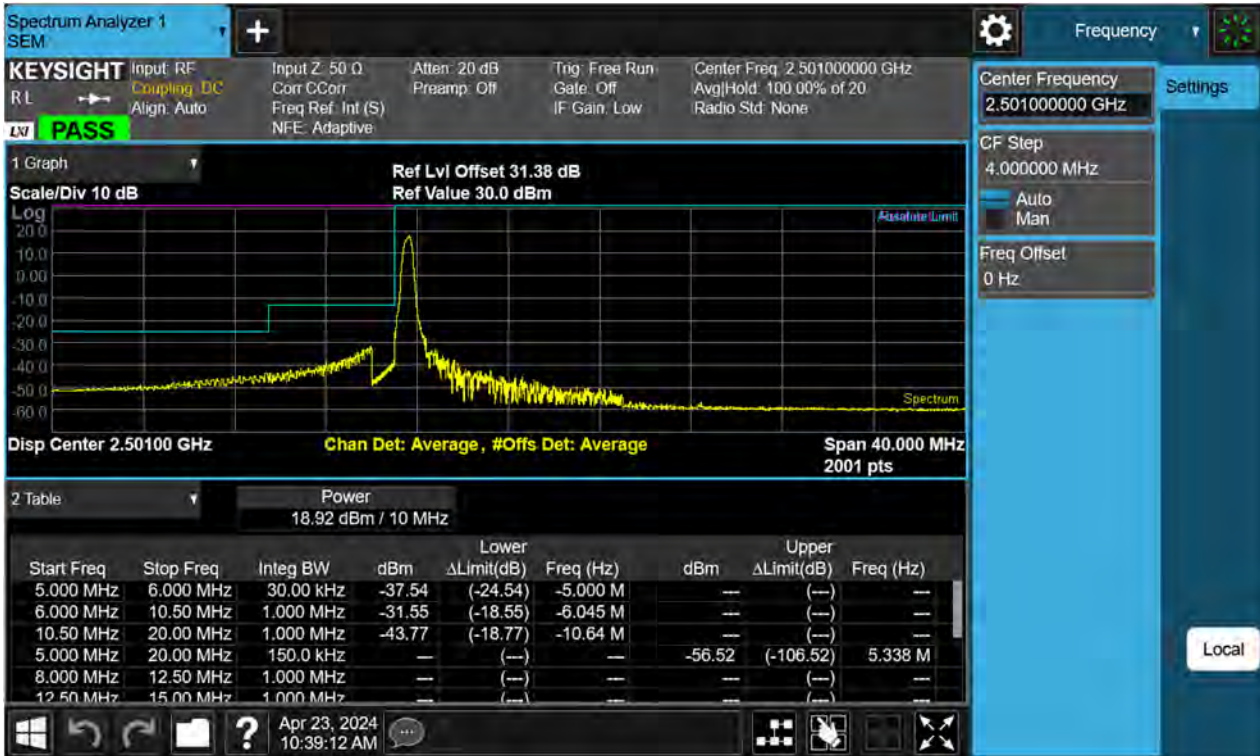


LTE41\_10 M\_BandEdge\_Upper\_Low\_2501 MHz\_QPSK\_1RB

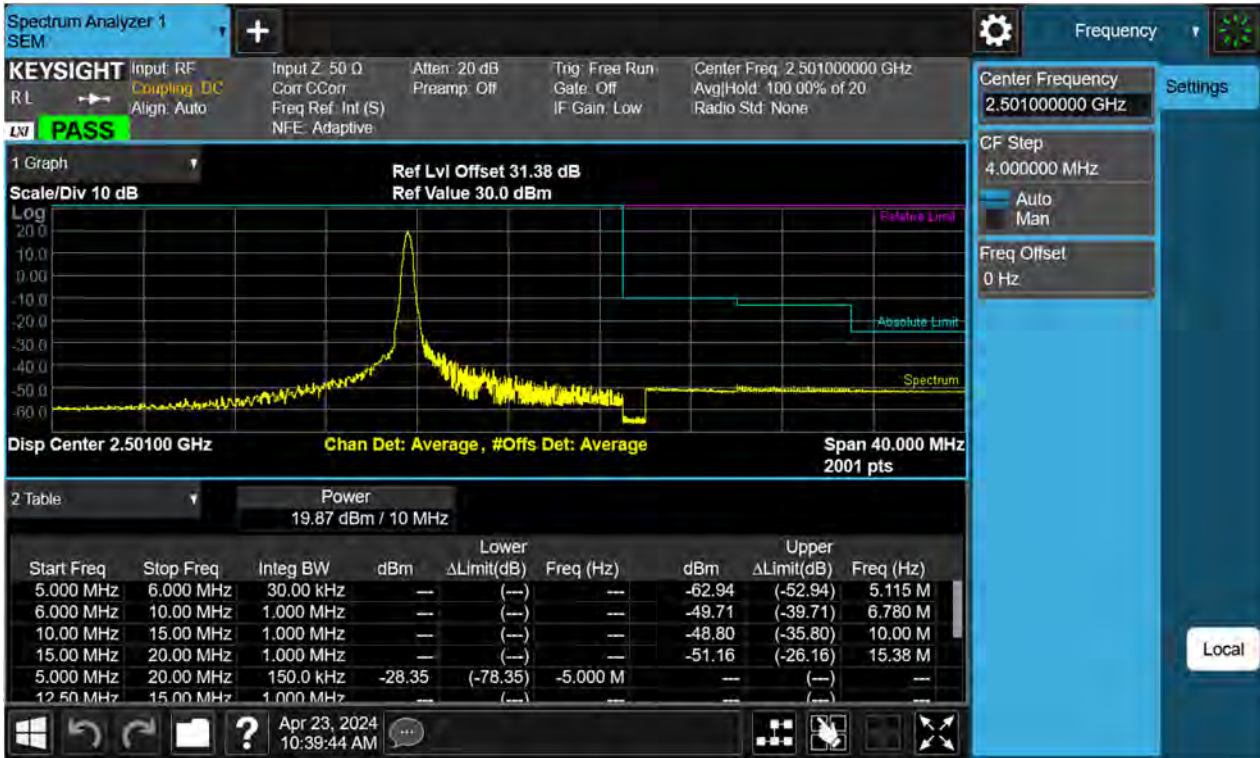





LTE41\_10 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB

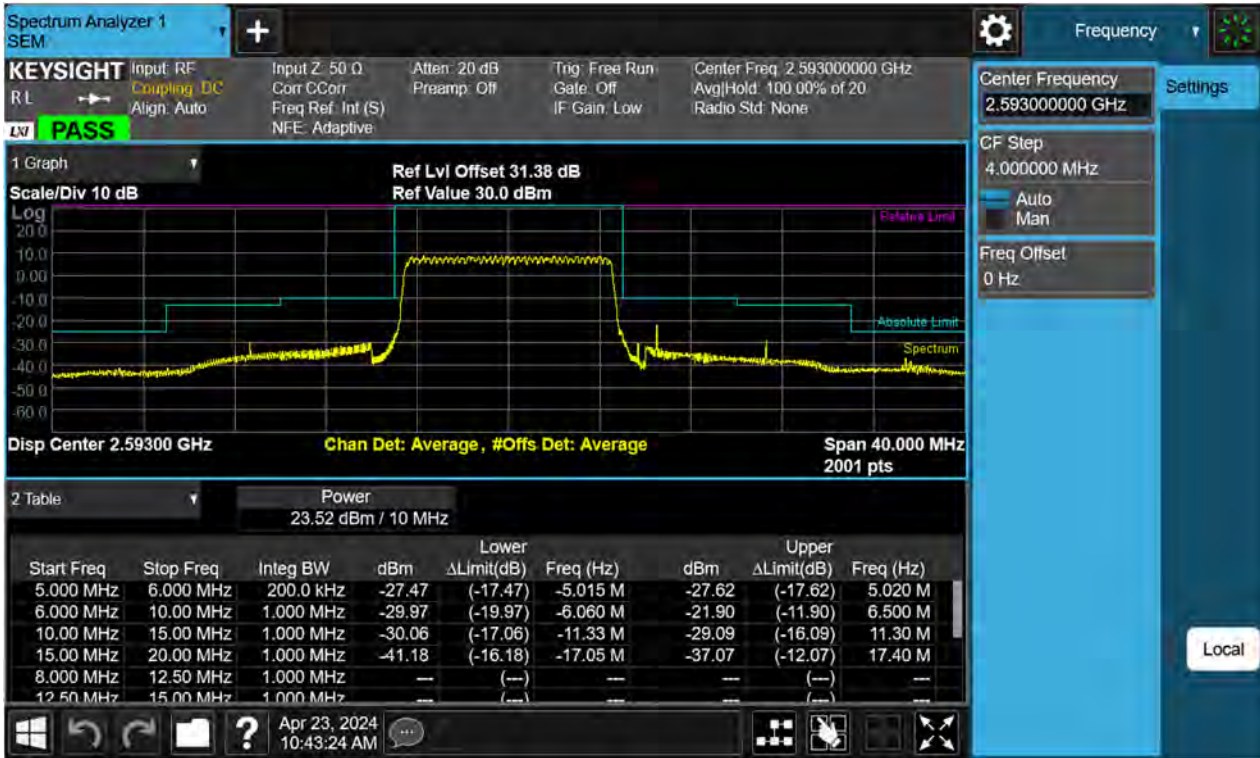


LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_FullRB

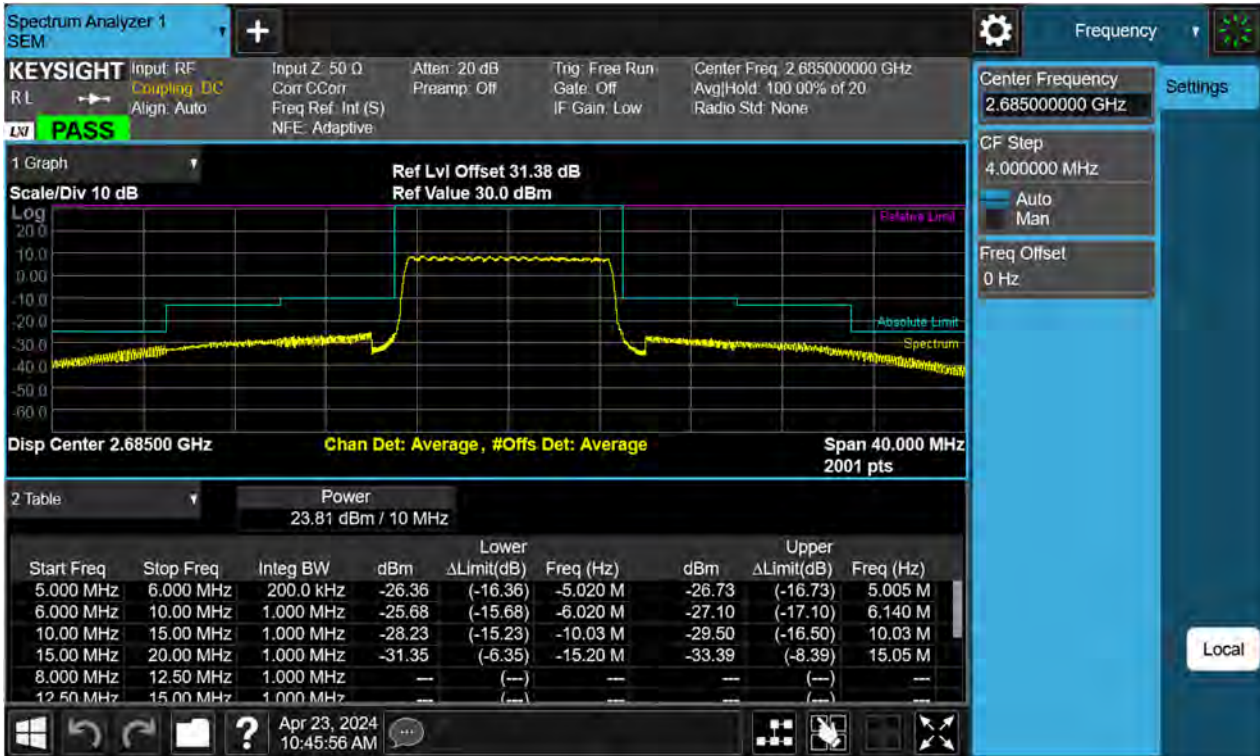

LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_1RB

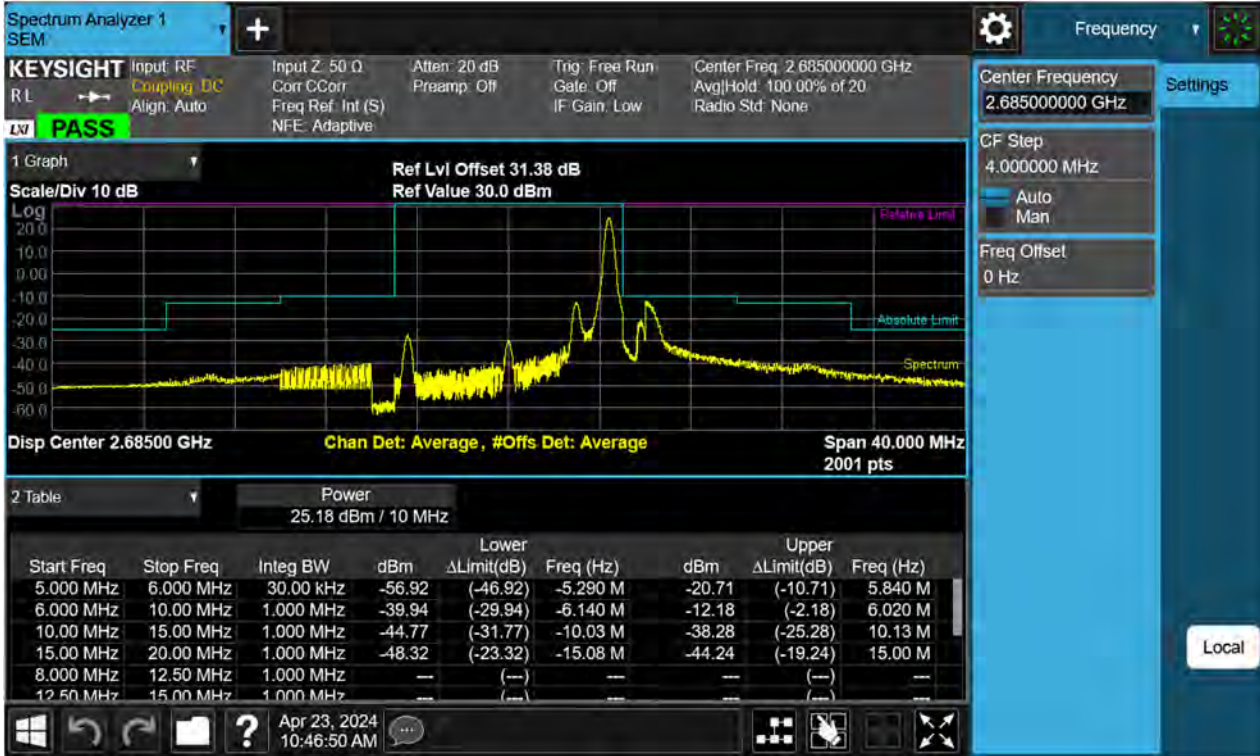


LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_FullRB

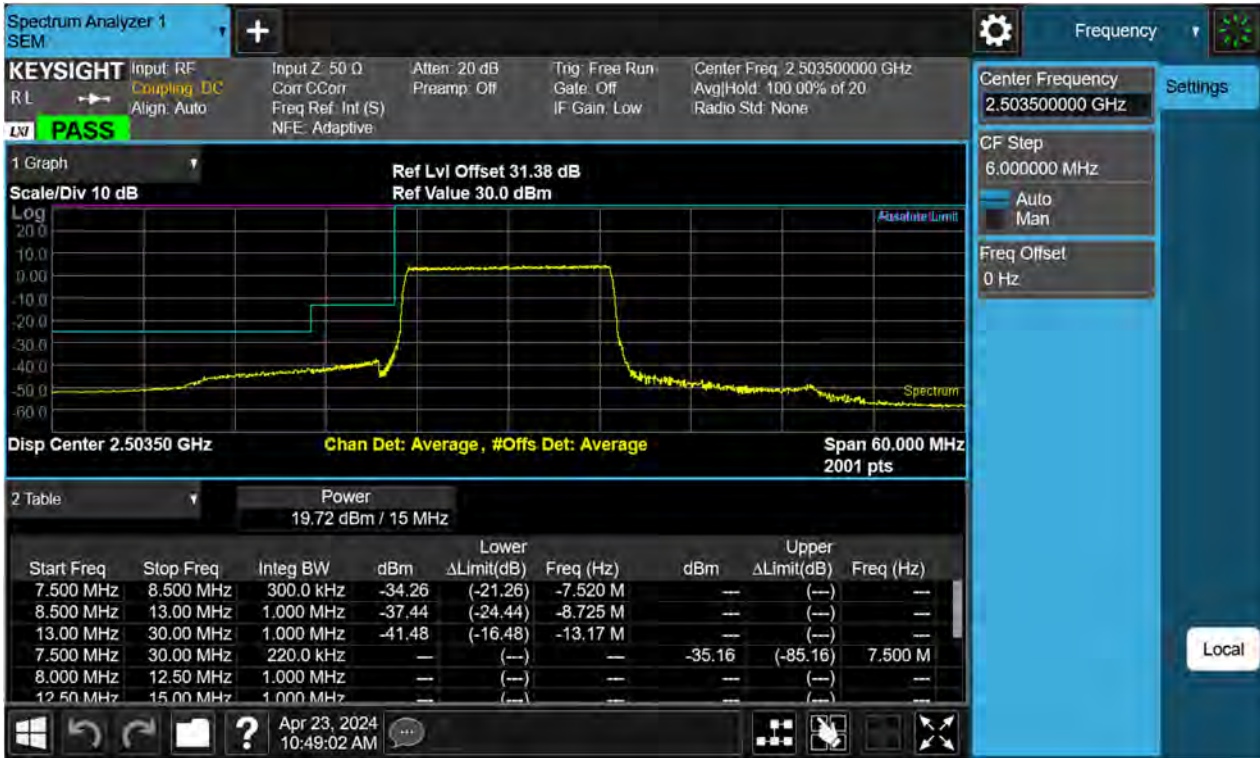





LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_FullRB

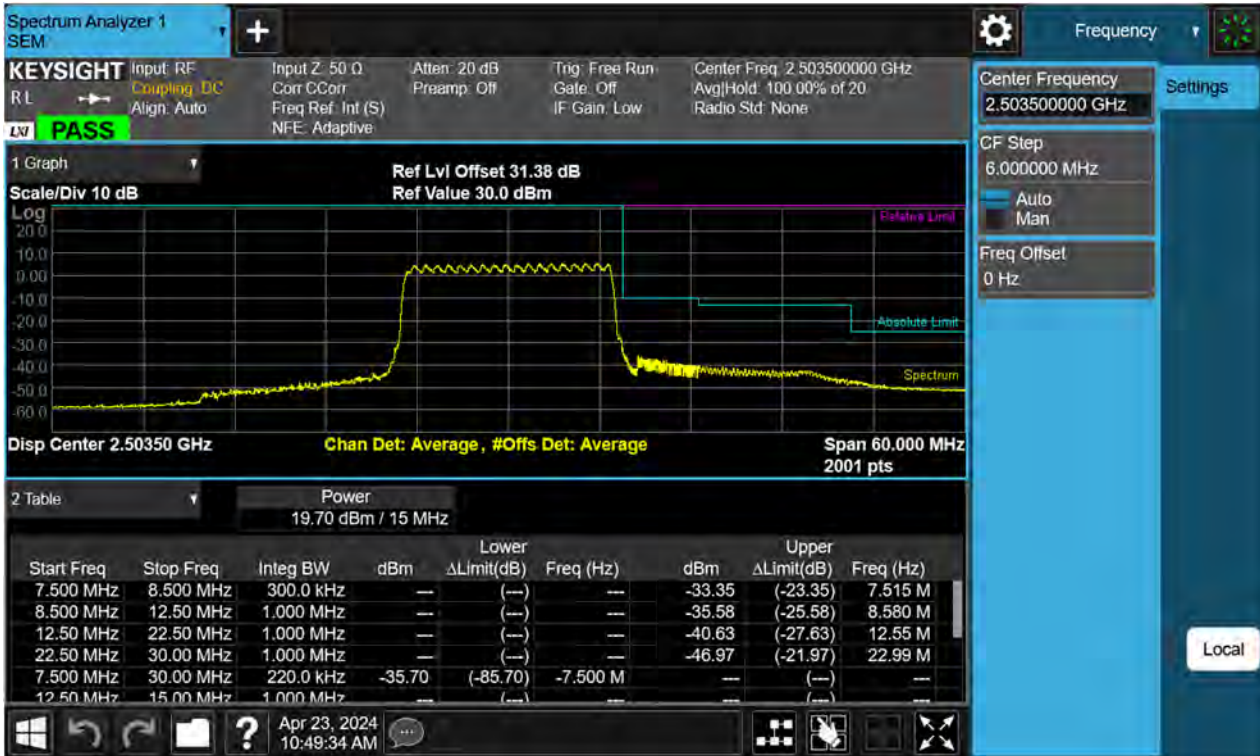

LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_1RB

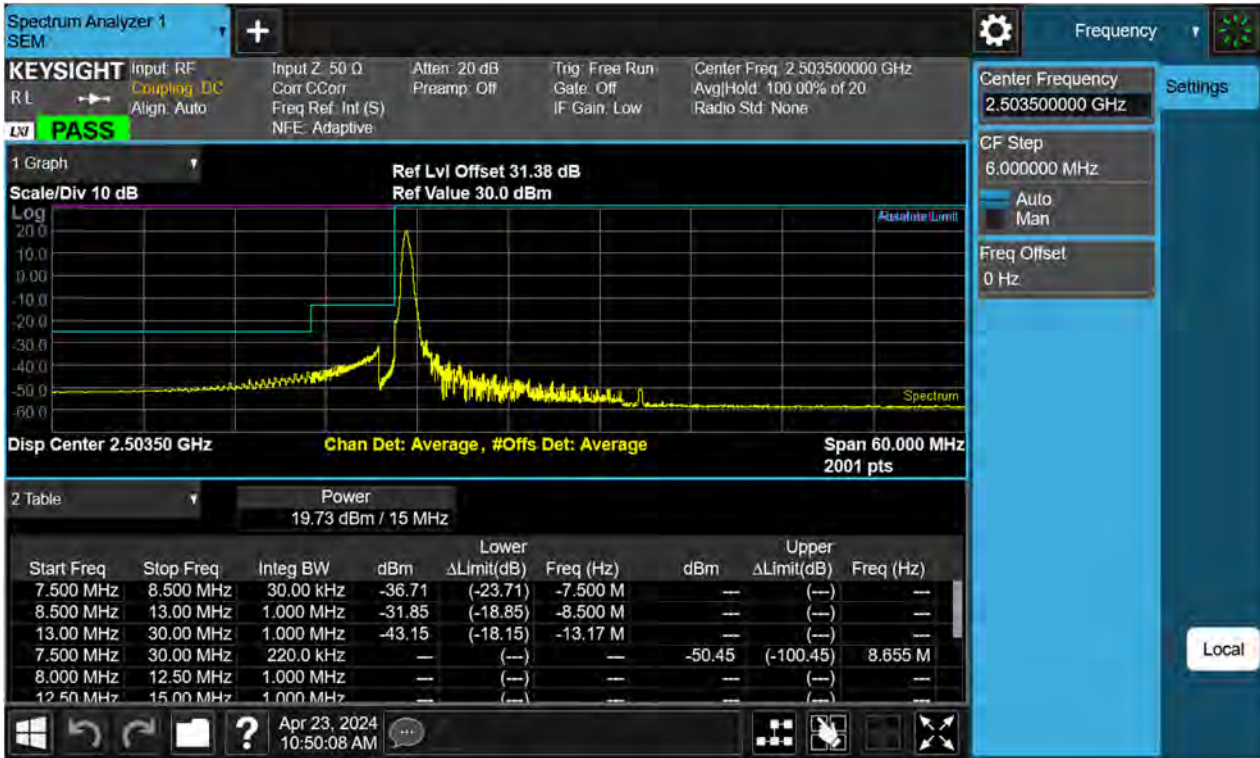

LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_1RB

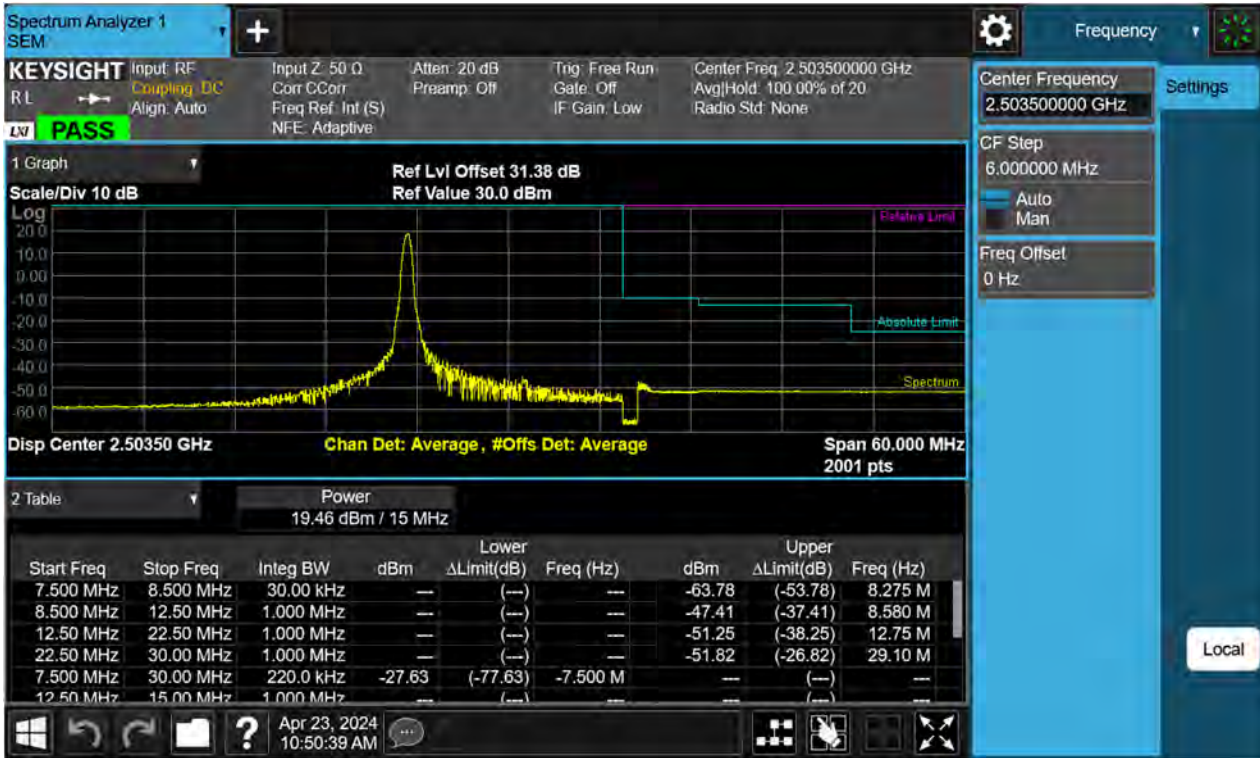


LTE41\_15 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB







LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_FullRB

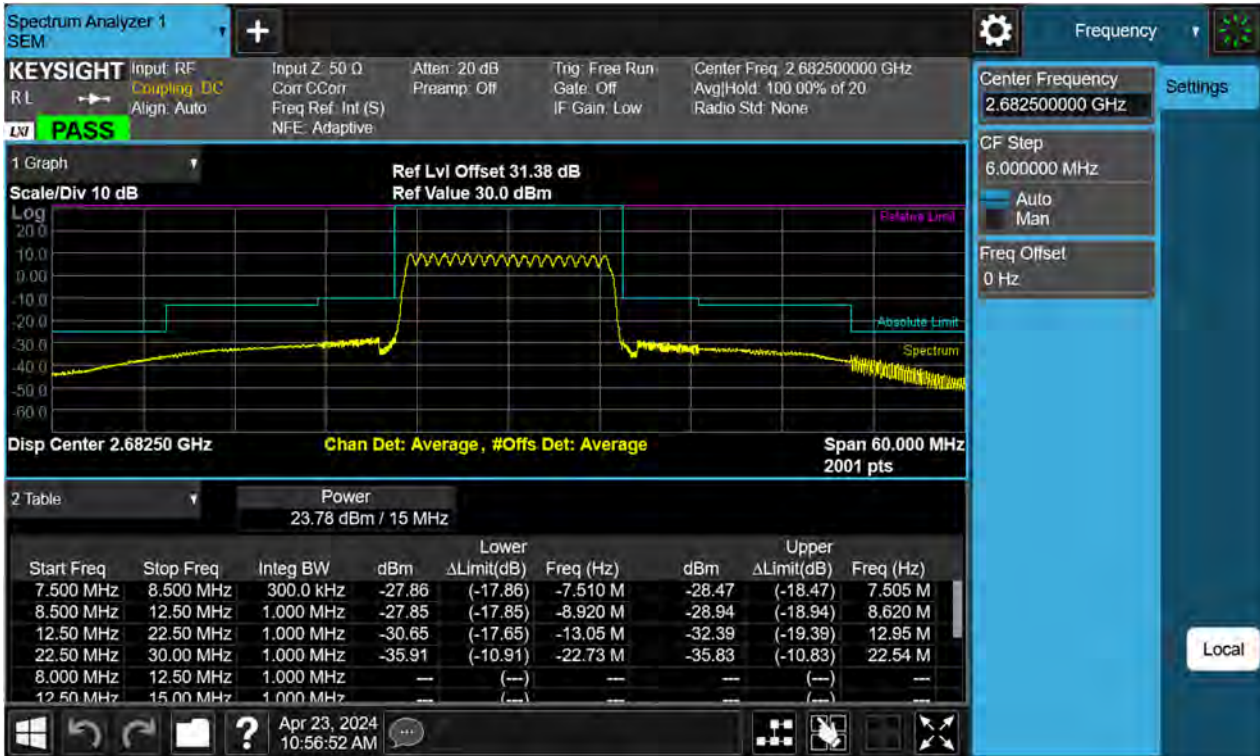


LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_1RB

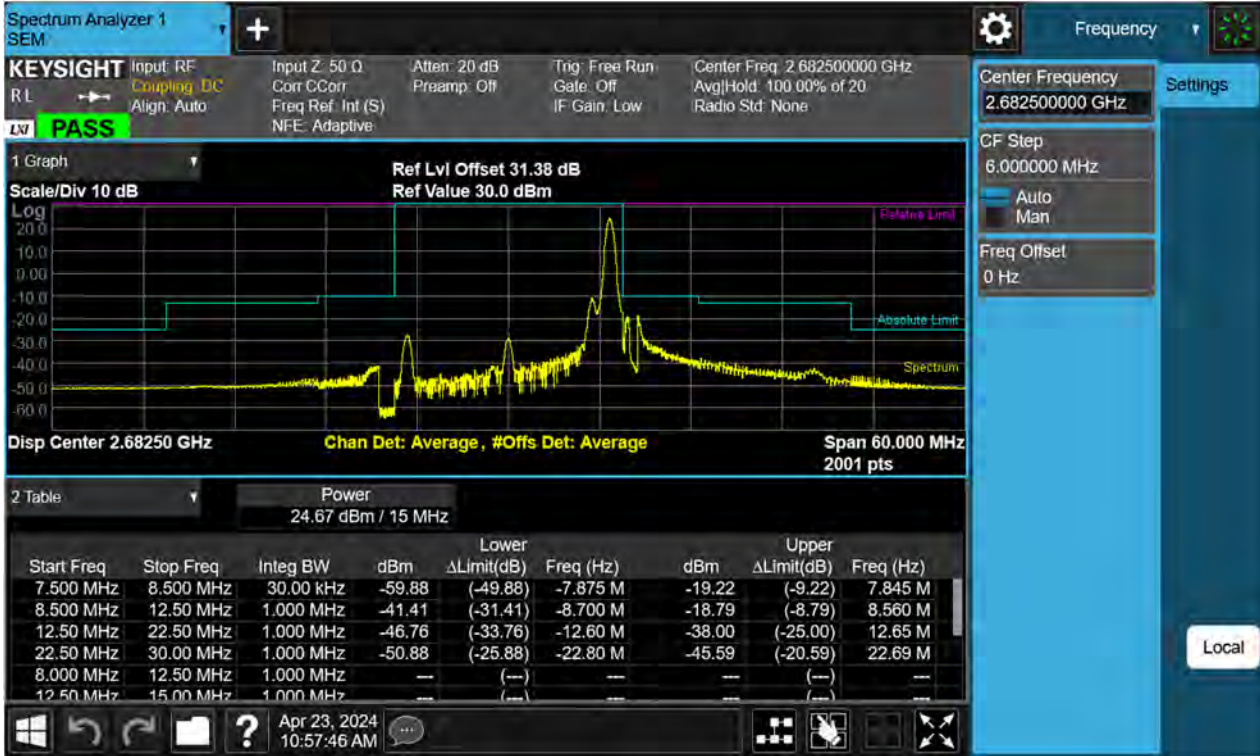

LTE41\_20 M\_BandEdge\_Lower\_Low\_2506 MHz\_QPSK\_FullRB

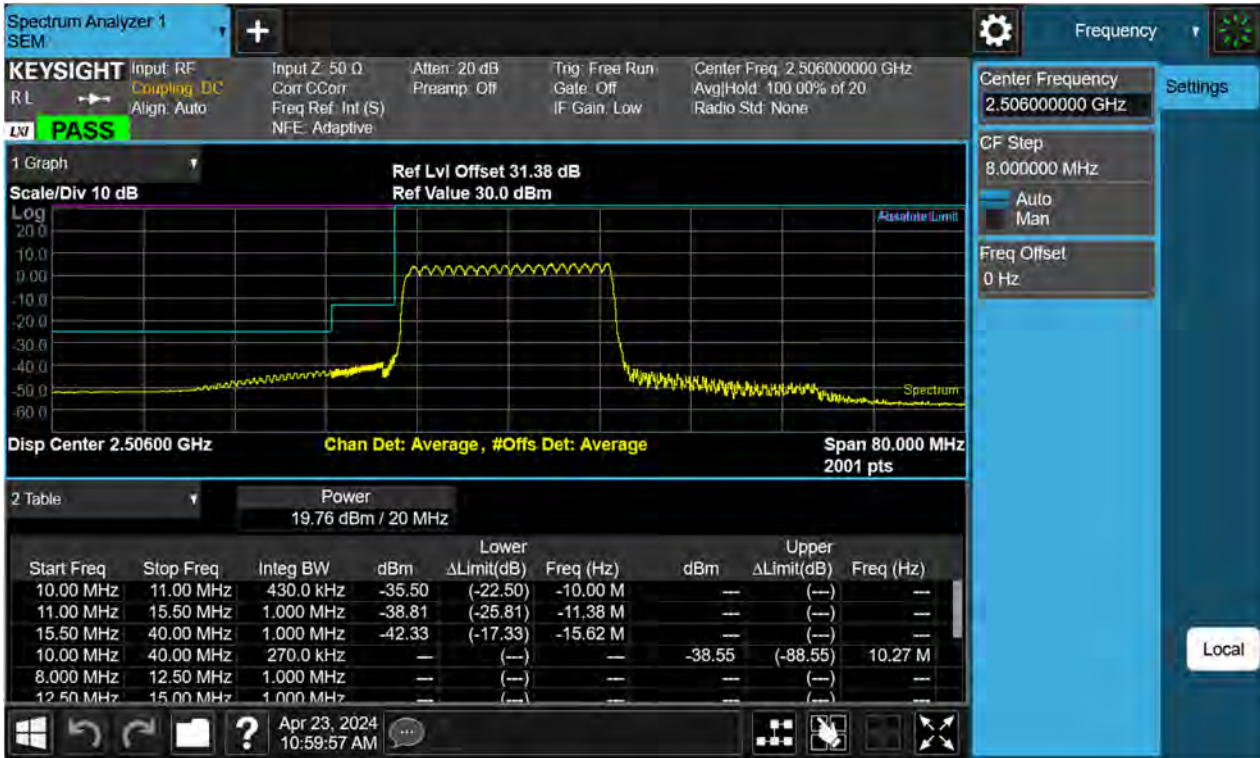


LTE41\_20 M\_BandEdge\_Upper\_Low\_2506 MHz\_QPSK\_FullRB

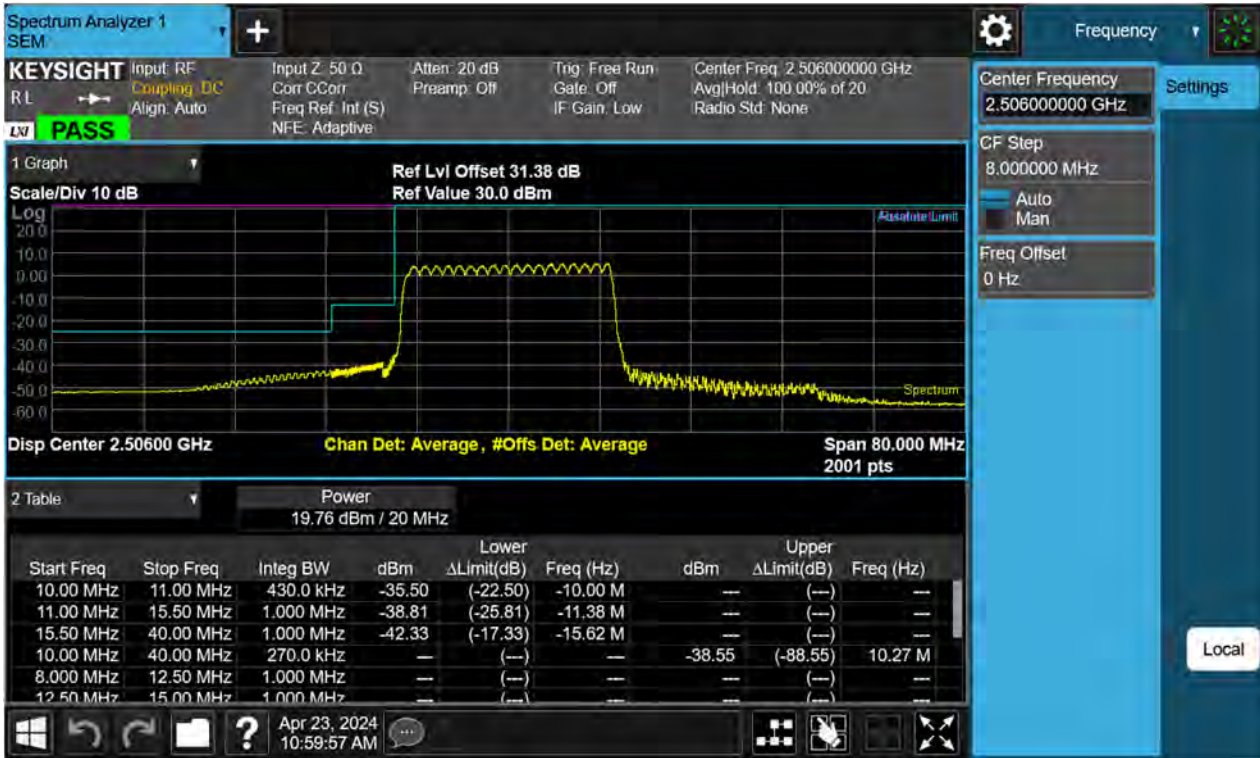




LTE41\_20 M\_BandEdge\_Lower\_Low\_2506 MHz\_QPSK\_1RB

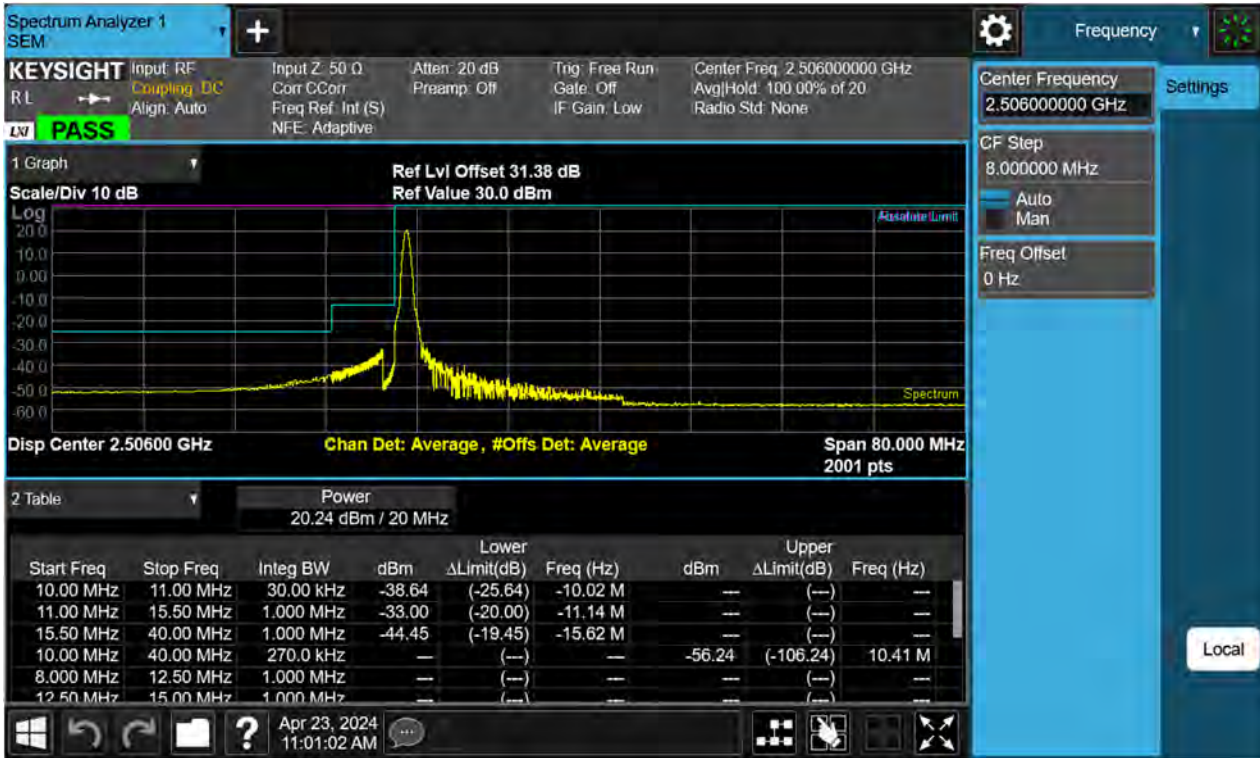


LTE41\_20 M\_BandEdge\_Upper\_Low\_2506 MHz\_QPSK\_1RB

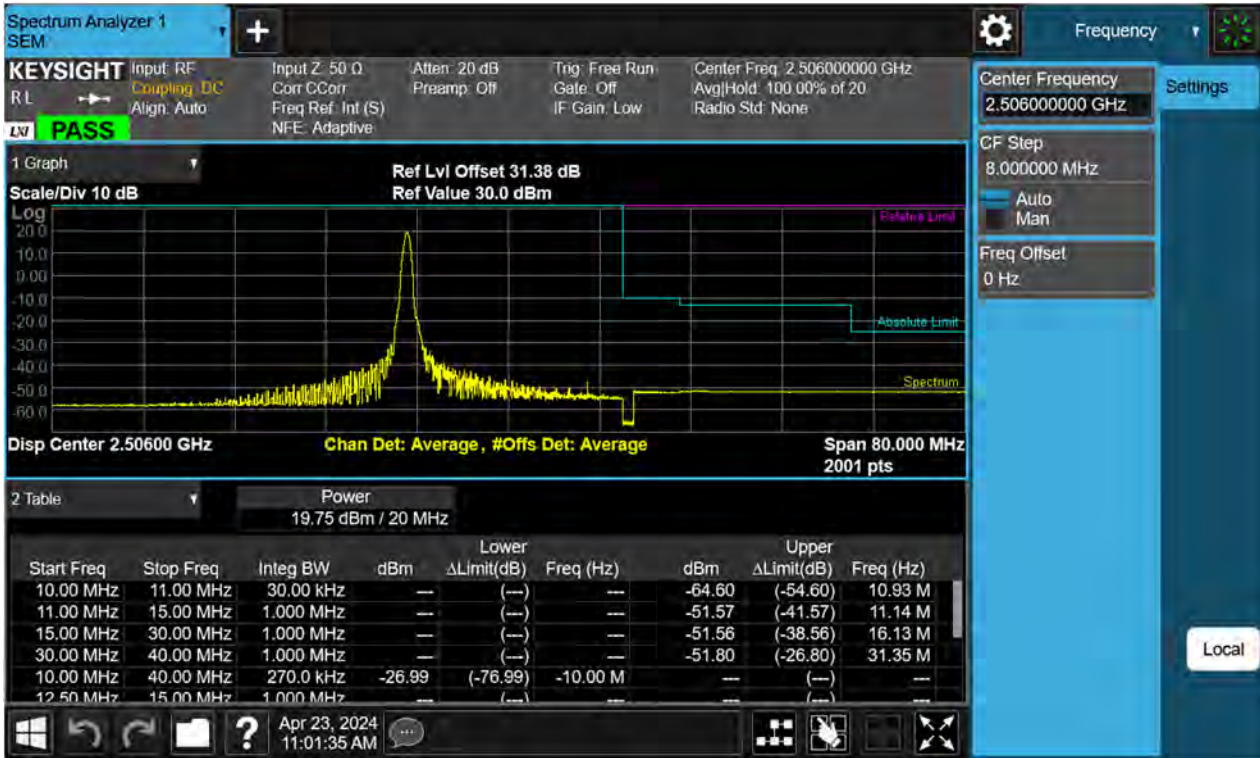

LTE41\_20 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB




LTE41\_20 M\_BandEdge\_High\_2680 MHz\_QPSK\_FullIRB

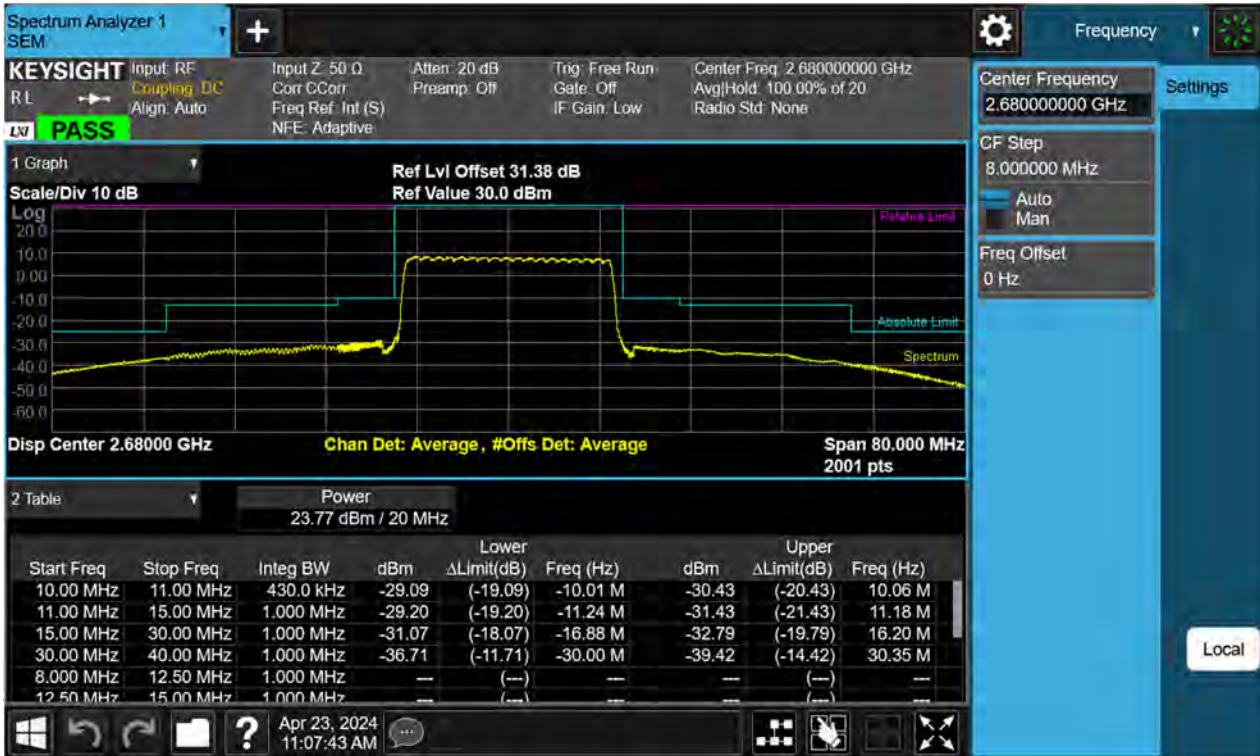





LTE41\_20 M\_BandEdge\_High\_2680 MHz\_QPSK\_1RB

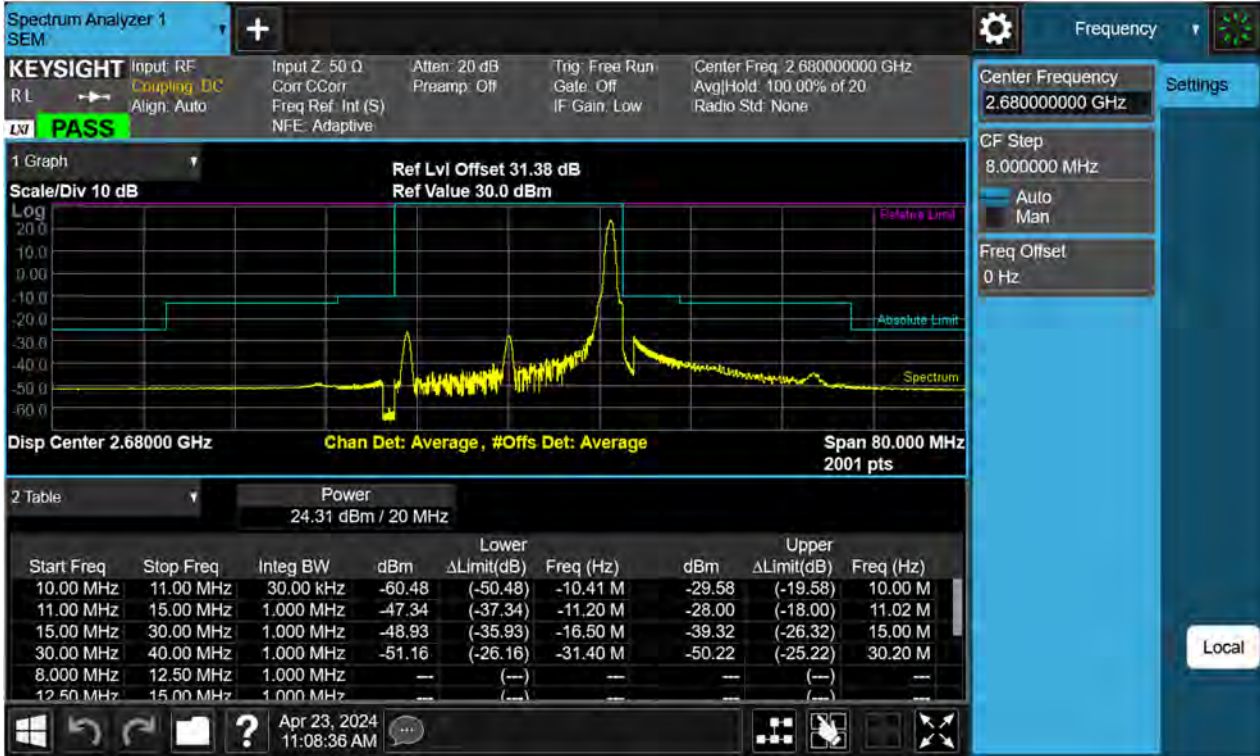

LTE41\_5 M\_OBW\_Mid Channel\_QPSK\_FullRB

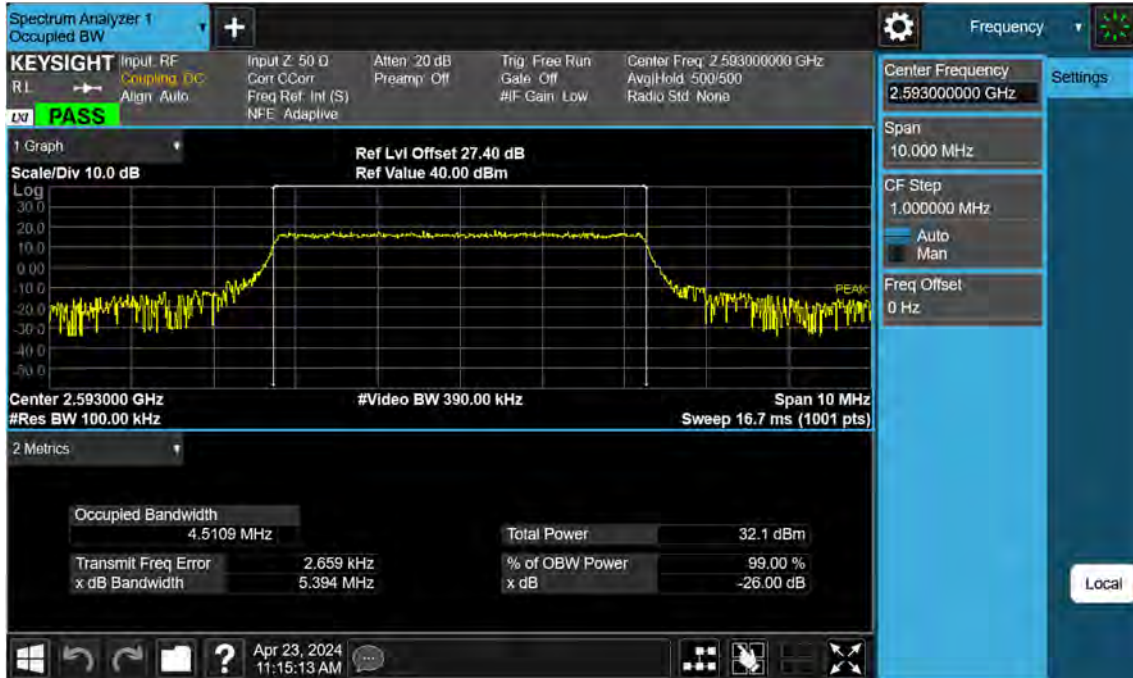

LTE41\_5 M\_OBW\_Mid Channel\_16QAM\_FullRB

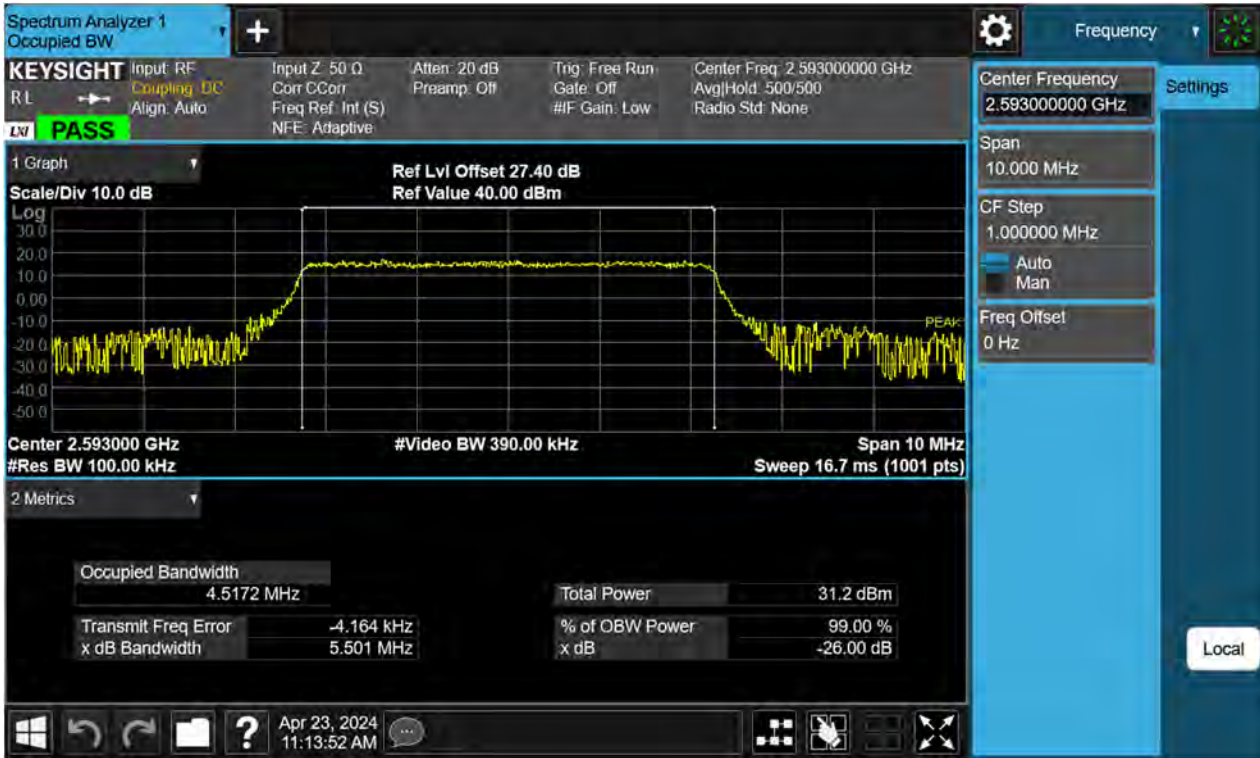

LTE41\_5 M\_OBW\_Mid Channel\_64QAM\_FullRB




LTE41\_5 M\_OBW\_ Mid Channel \_256QAM\_FullRB







LTE41\_10 M\_OBW\_Mid Channel\_QPSK\_FullRB

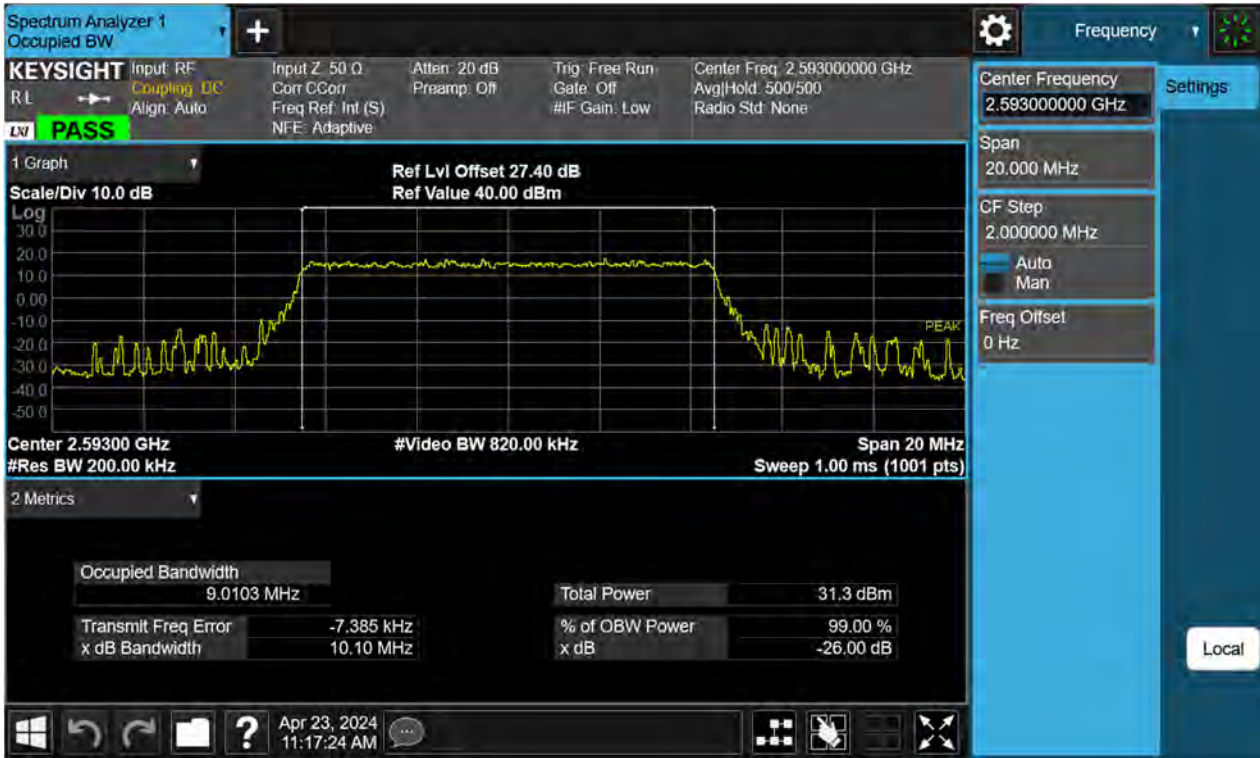

LTE41\_10 M\_OBW\_Mid Channel \_16QAM\_FullRB

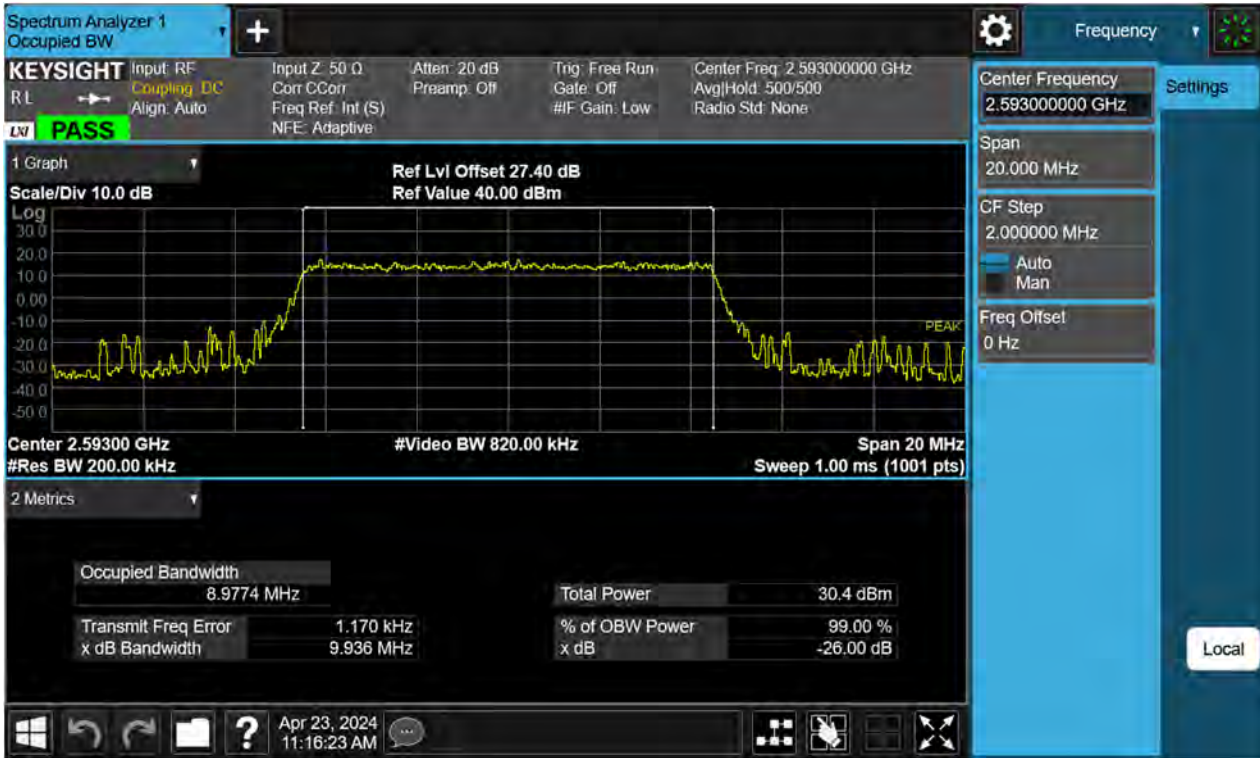


LTE41\_10 M\_OBW\_Mid Channel\_64QAM\_FullRB

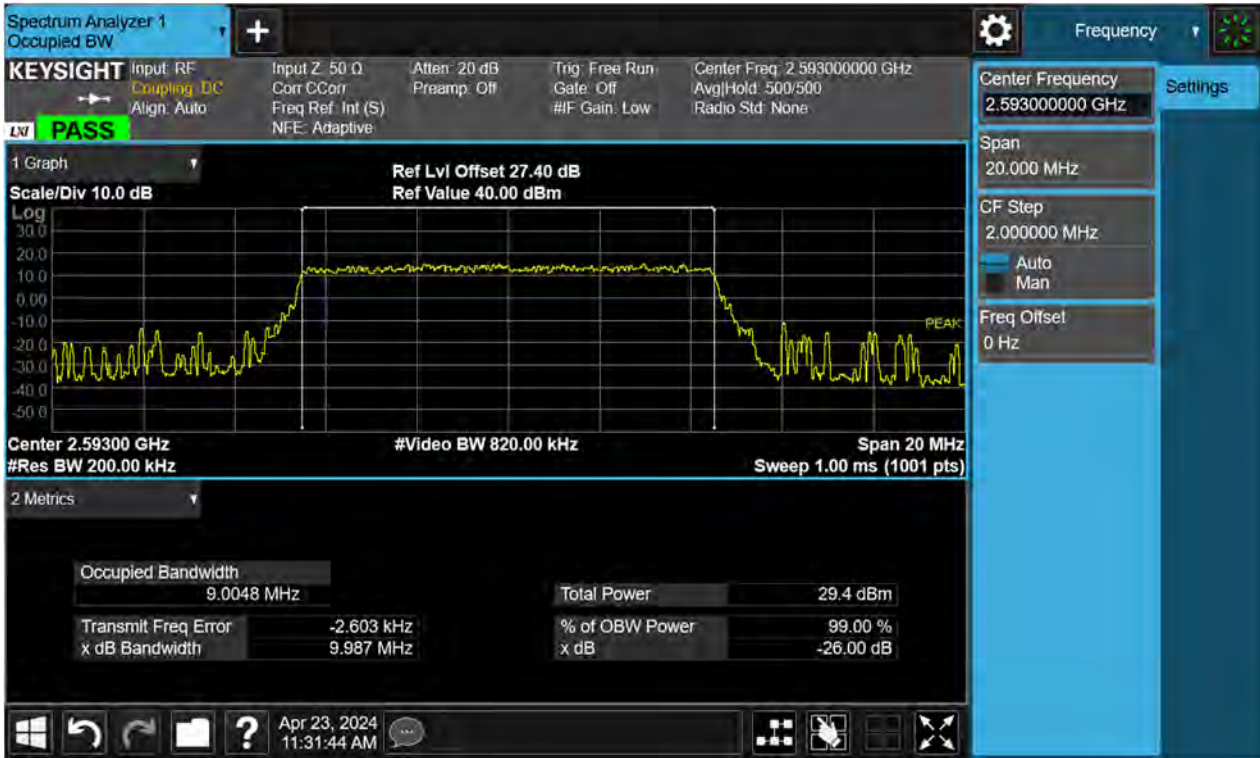





LTE41\_10 M\_OBW\_Mid Channel\_256QAM\_FullRB

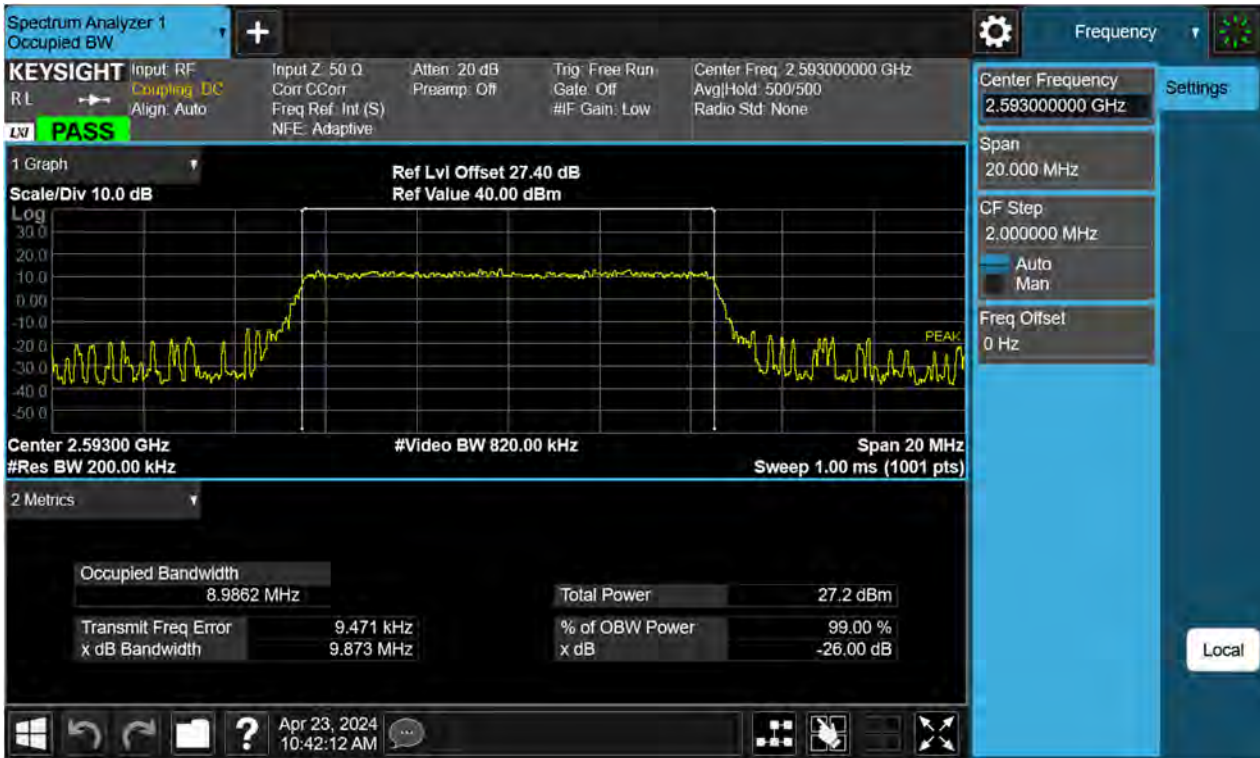


LTE41\_15 M\_OBW\_Mid Channel\_QPSK\_FullRB

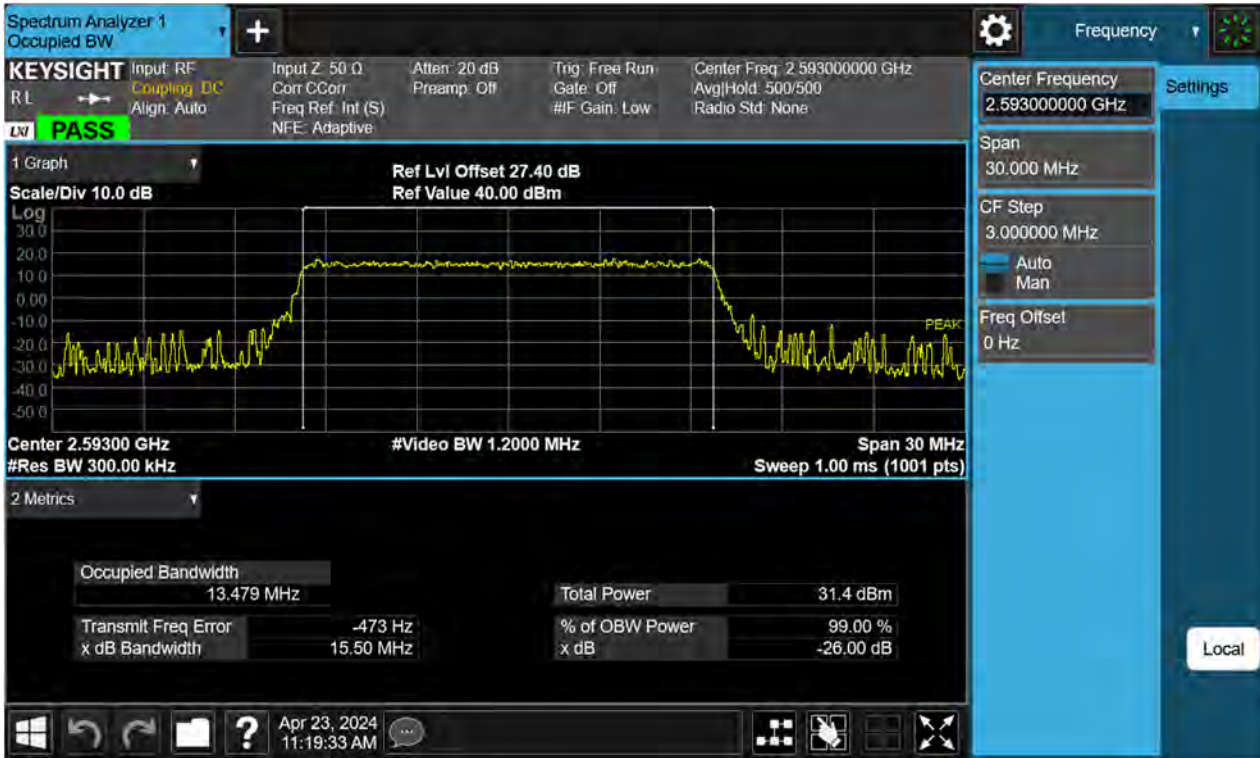


LTE41\_15 M\_OBW\_Mid Channel\_16QAM\_FullRB

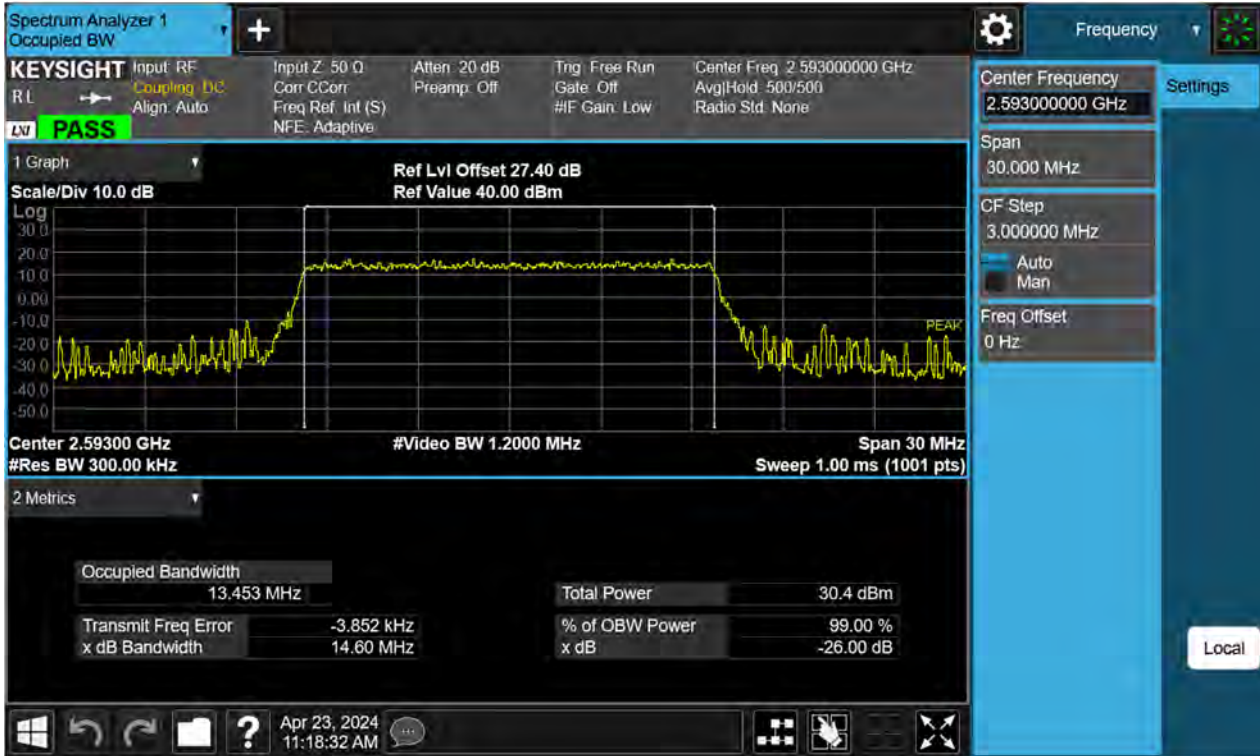

LTE41\_15 M\_OBW\_Mid Channel\_64QAM\_FullRB

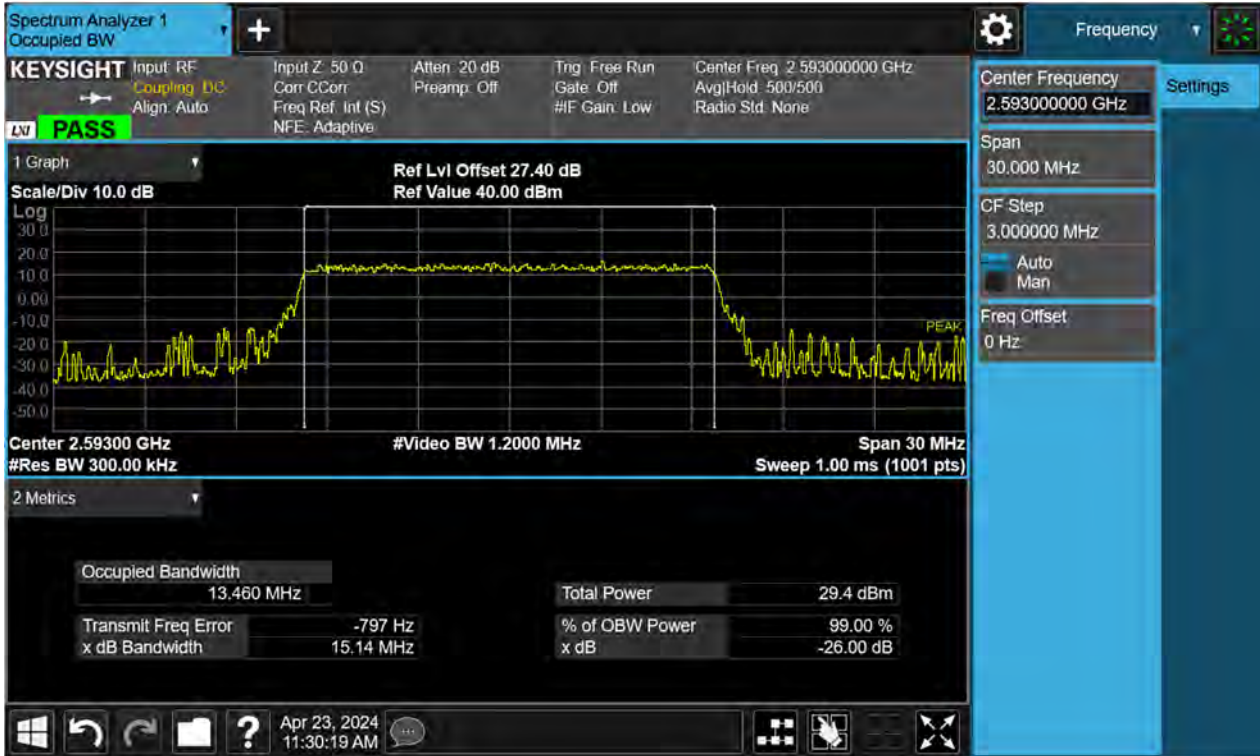


LTE41\_15 M\_OBW\_Mid Channel\_256QAM\_FullRB

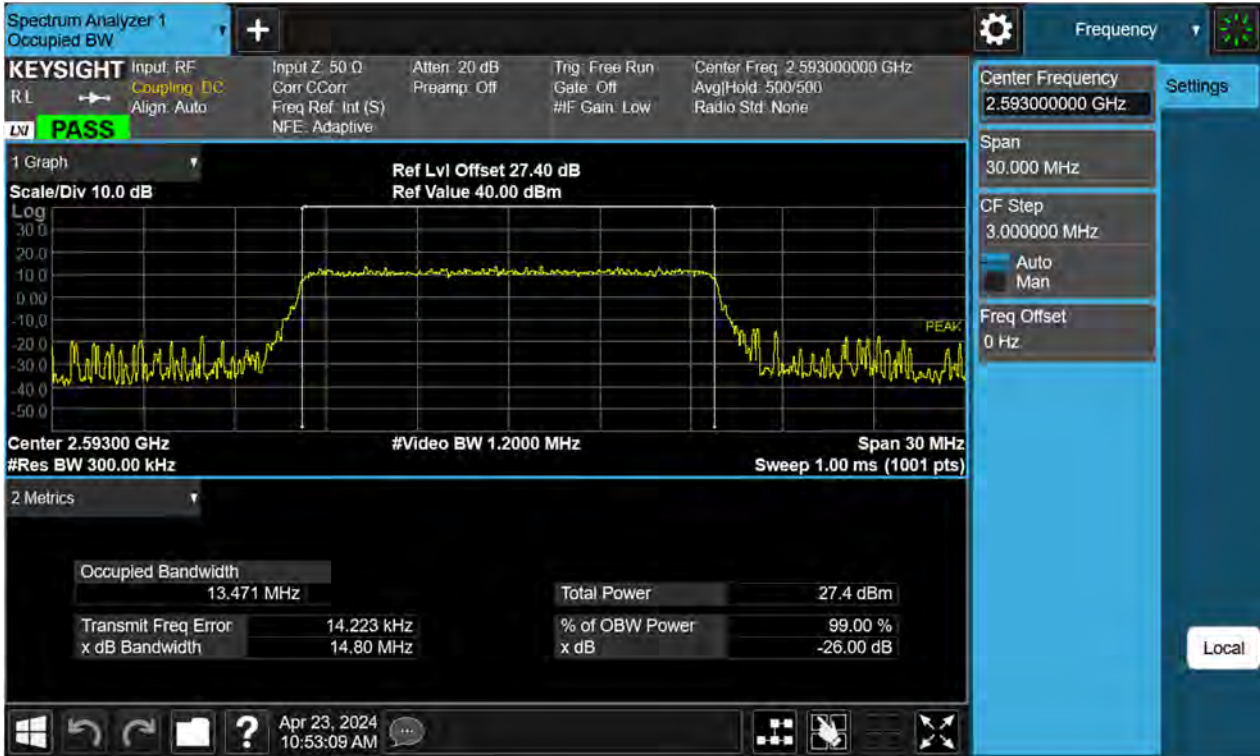





LTE41\_20 M\_OBW\_Mid Channel\_QPSK\_FullRB

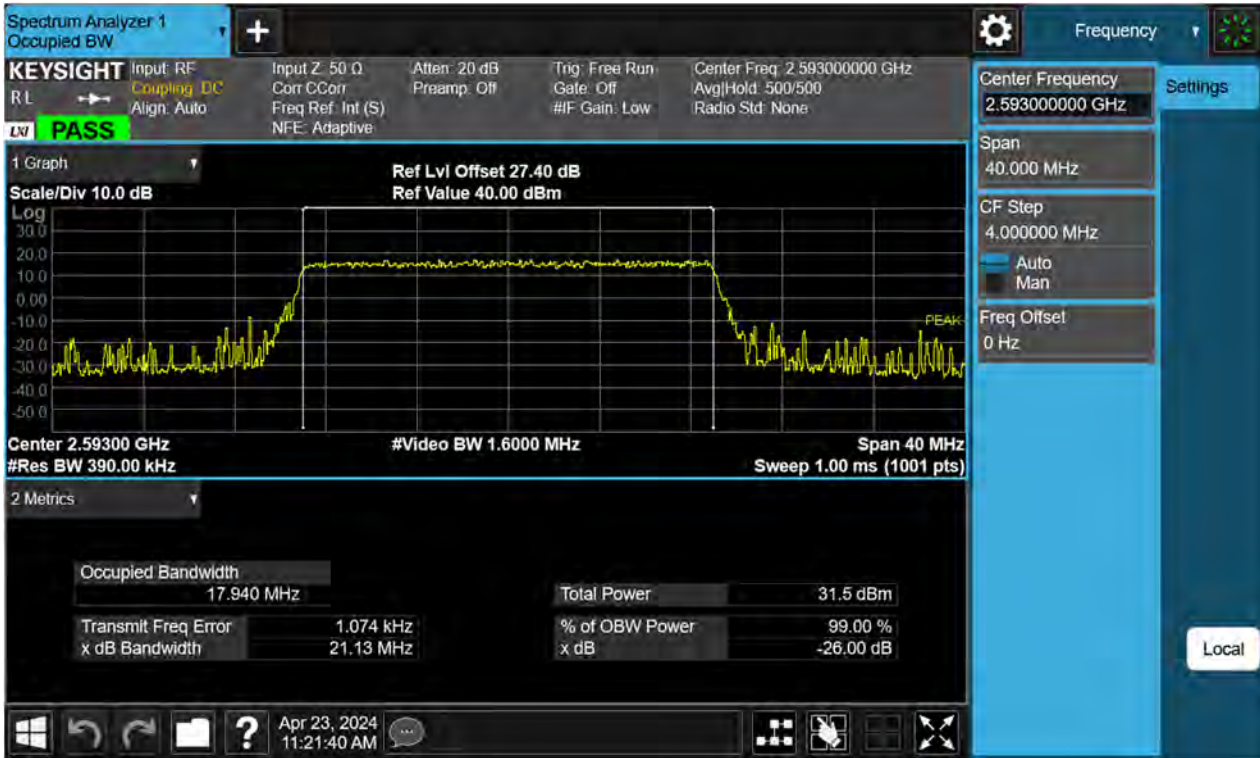

LTE41\_20 M\_OBW\_Mid Channel\_16QAM\_FullRB

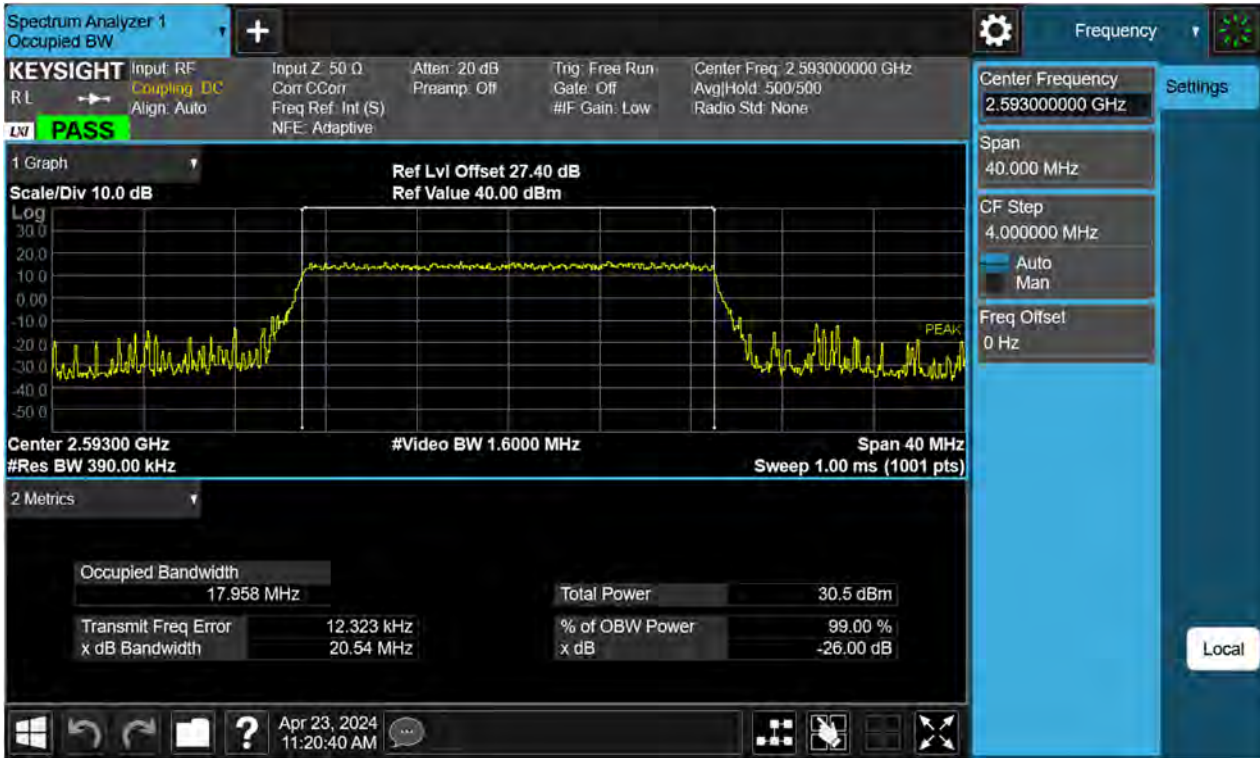


LTE41\_20 M\_OBW\_Mid Channel\_64QAM\_FullRB

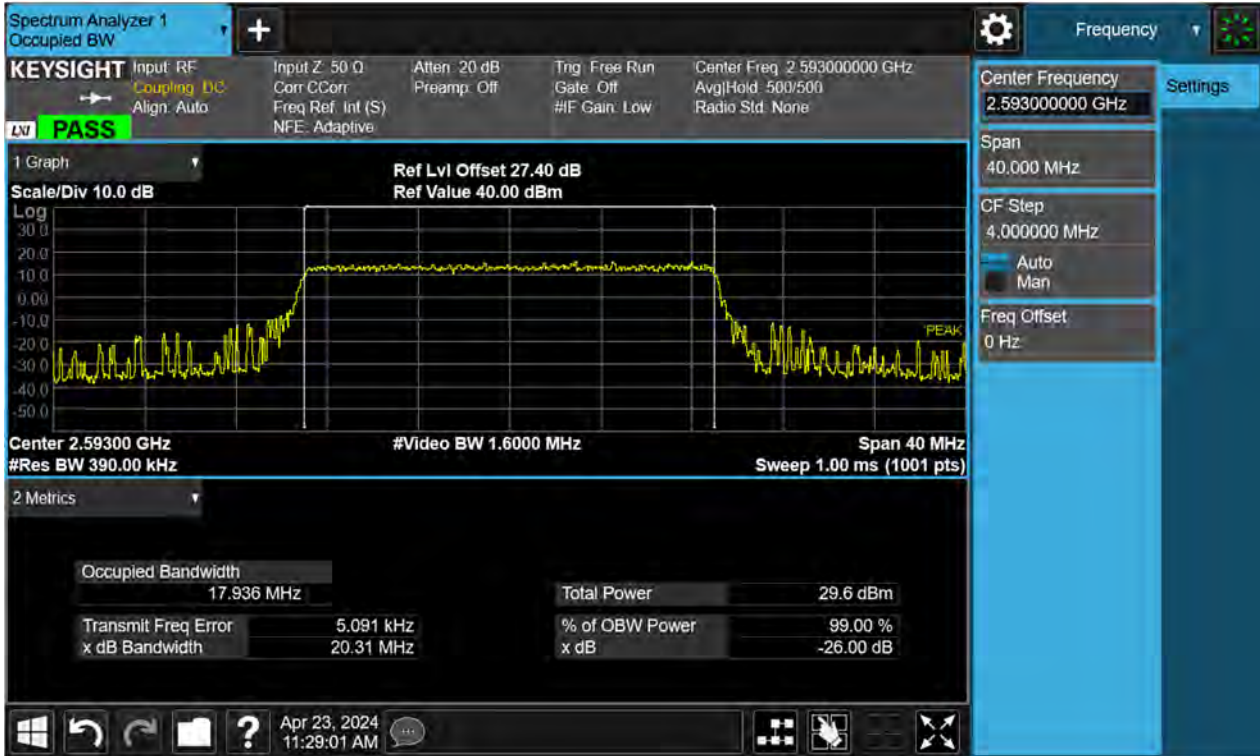



LTE41\_20 M\_OBW\_Mid Channel\_256QAM\_FullRB

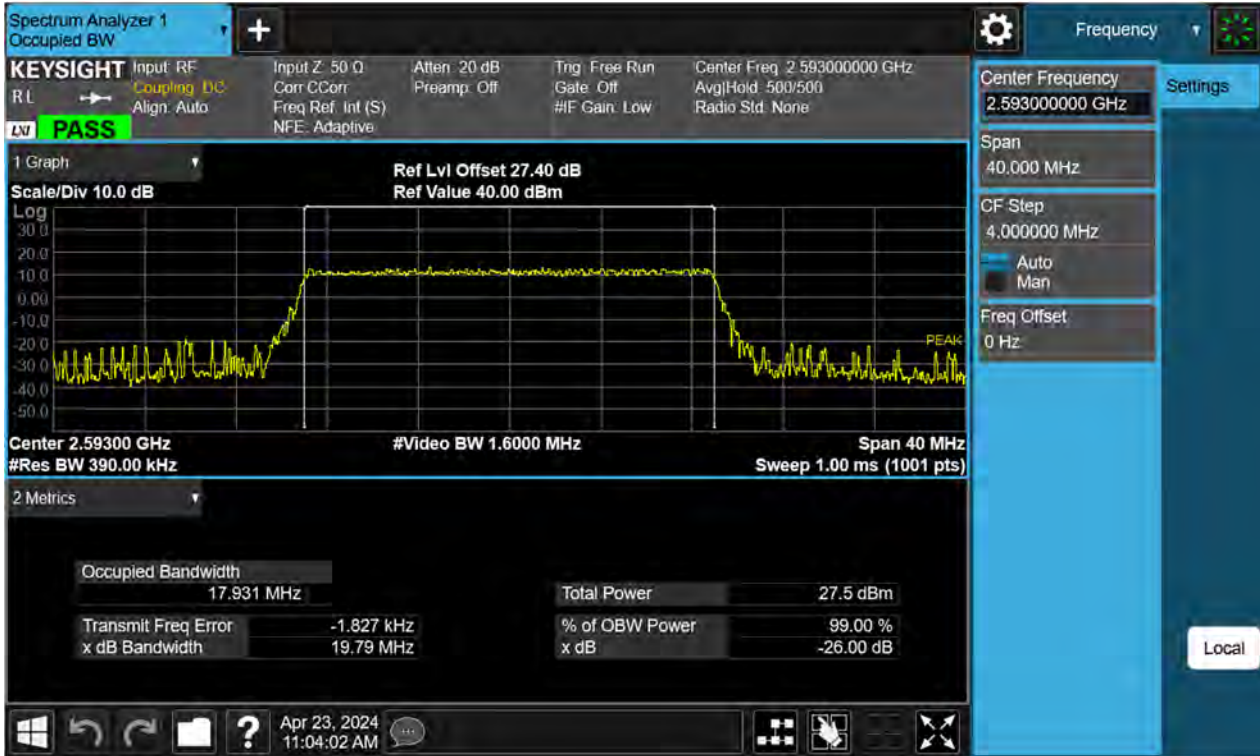

LTE41\_5 M\_PAR\_Mid Channel\_QPSK\_FullRB



LTE41\_5 M\_PAR\_Mid Channel\_16QAM\_FullRB



LTE41\_5 M\_PAR\_Mid Channel\_64QAM\_FullRB




LTE41\_5 M\_PAR\_Mid Channel\_256QAM\_FullRB





LTE41\_10 M\_PAR\_Mid Channel\_QPSK\_FullRB

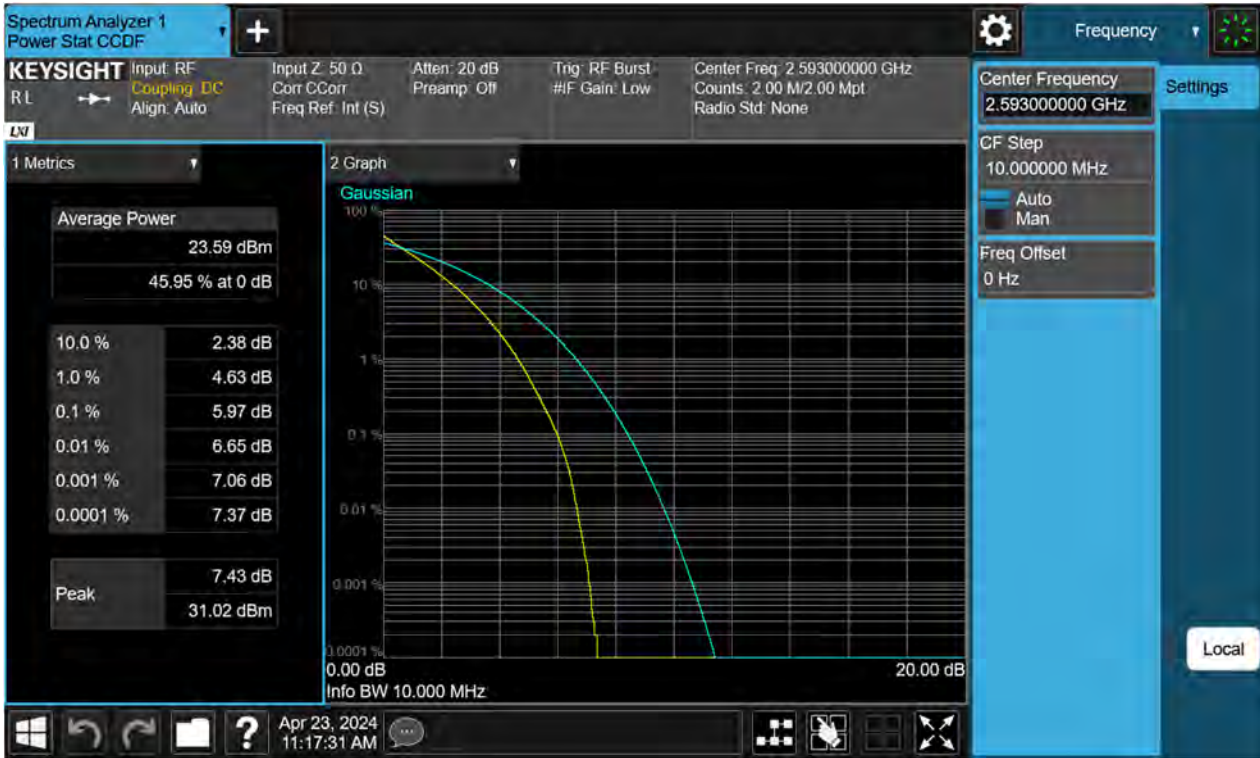

LTE41\_10 M\_PAR\_Mid Channel\_16QAM\_FullRB



LTE41\_10 M\_PAR\_Mid Channel\_64QAM\_FullRB





LTE41\_10 M\_PAR\_Mid Channel\_256QAM\_FullIRB



LTE41\_15 M\_PAR\_Mid Channel\_QPSK\_FullRB



LTE41\_15 M\_PAR\_Mid Channel\_16QAM\_FullRB



LTE41\_15 M\_PAR\_Mid Channel\_64QAM\_FullRB



LTE41\_15 M\_PAR\_Mid Channel\_256QAM\_FullIRB






LTE41\_20 M\_PAR\_Mid Channel\_QPSK\_FullRB



LTE41\_20 M\_PAR\_Mid Channel\_16QAM\_FullRB



LTE41\_20 M\_PAR\_Mid Channel\_64QAM\_FullRB

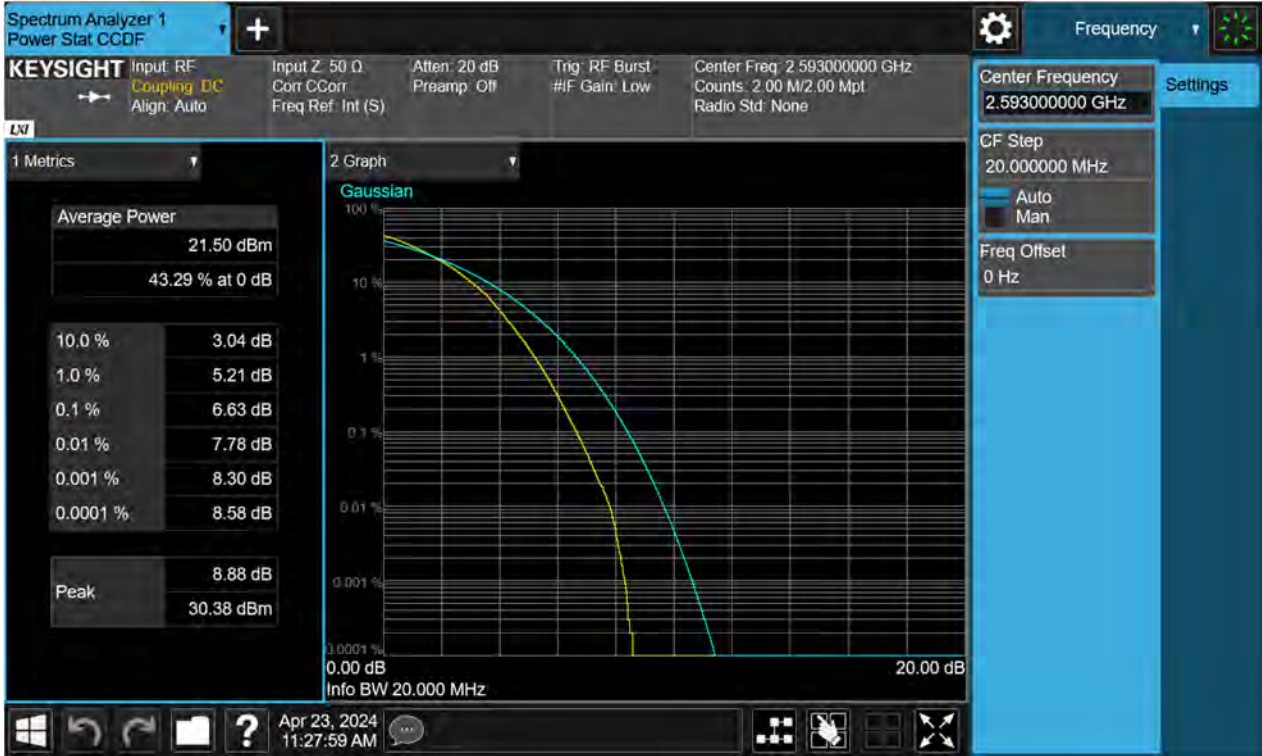





LTE41\_20 M\_PAR\_Mid Channel\_256QAM\_FullIRB




LTE41\_5 M\_CSE(30 M-10 G)\_ Lowest Channel

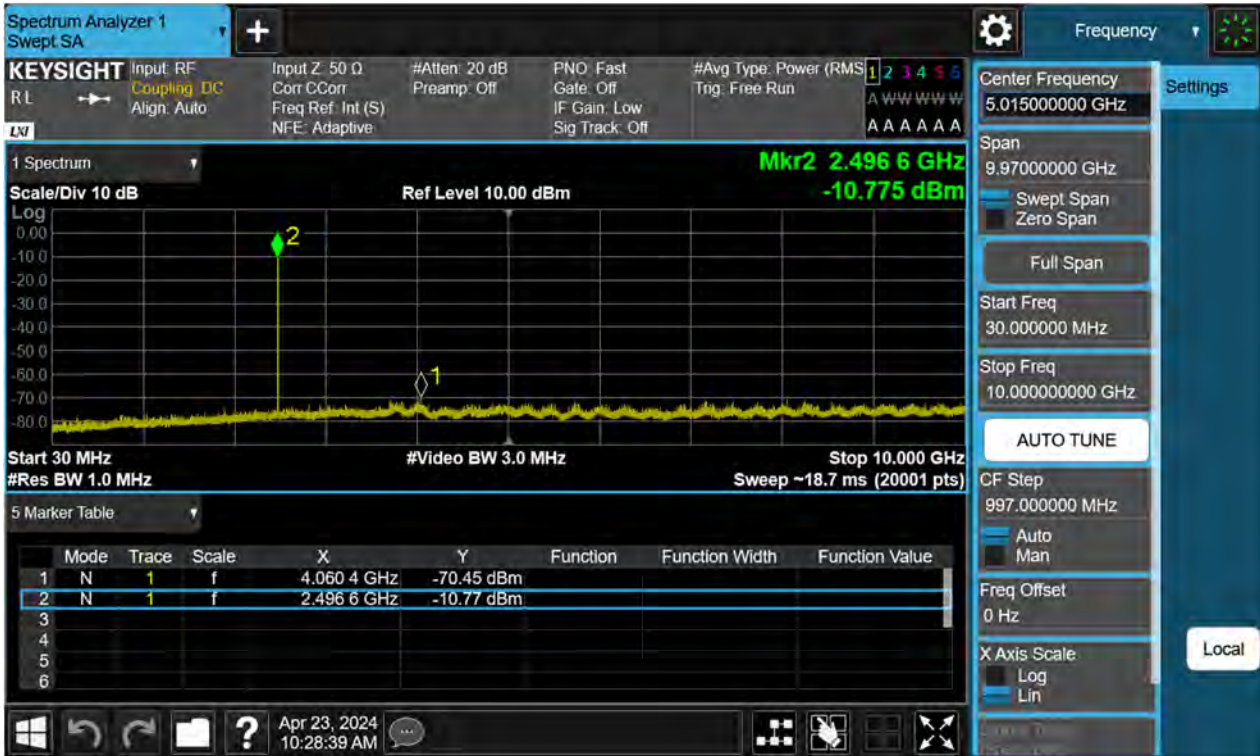

LTE41\_5 M\_CSE(30 M-10 G)\_ Mid Channel

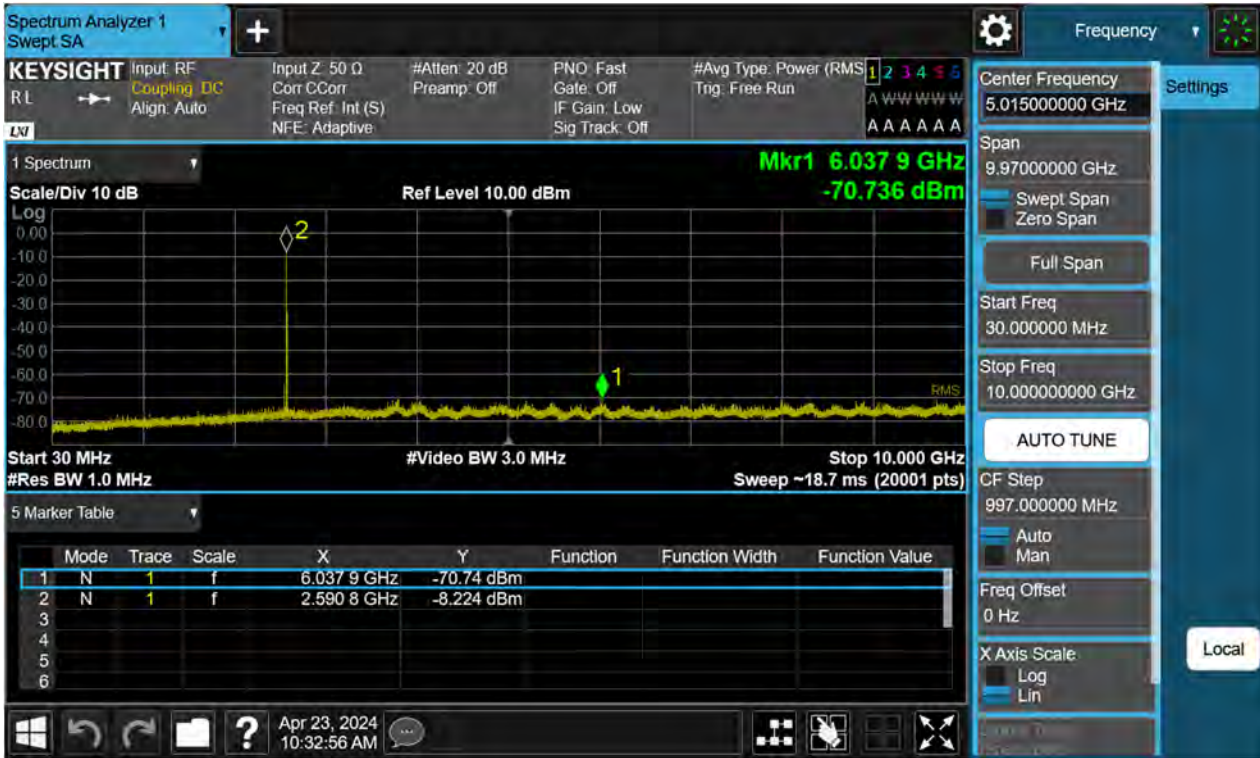


LTE41\_5 M\_CSE(30 M-10 G)\_ Highest Channel

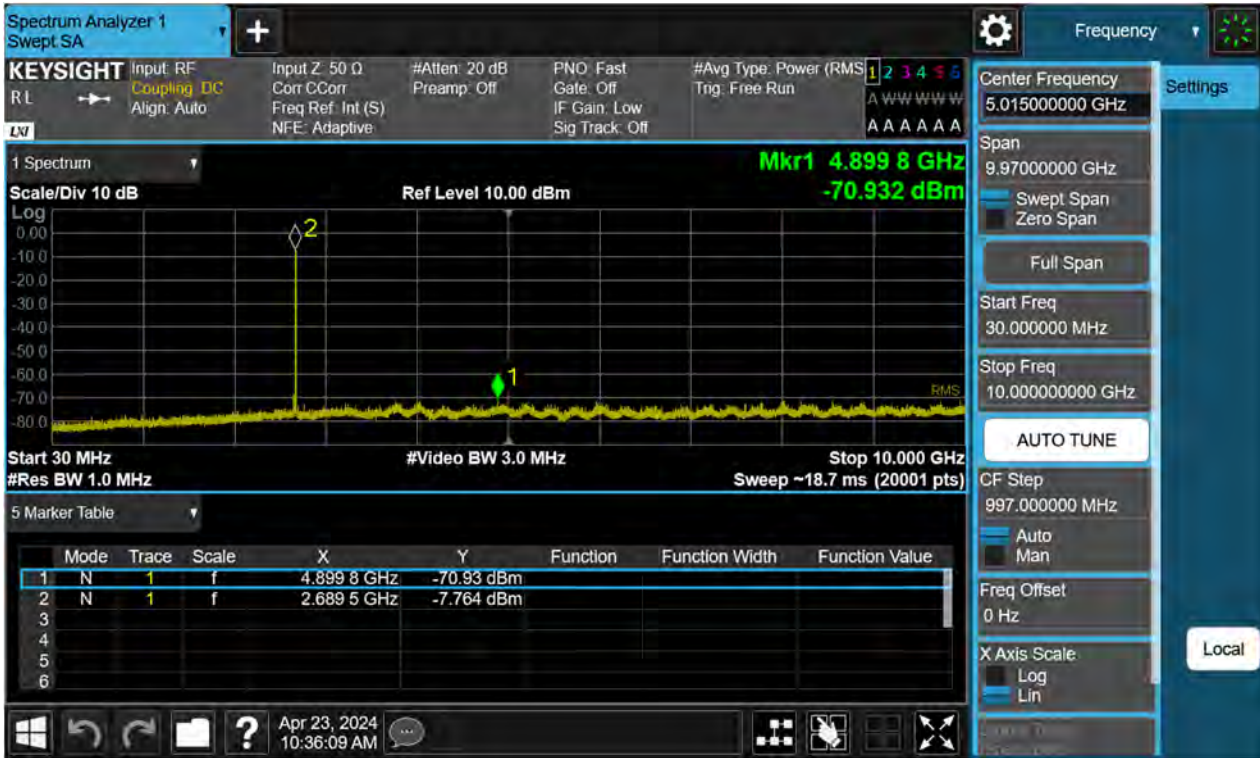





LTE41\_10 M\_CSE(30 M-10 G)\_ Lowest Channel

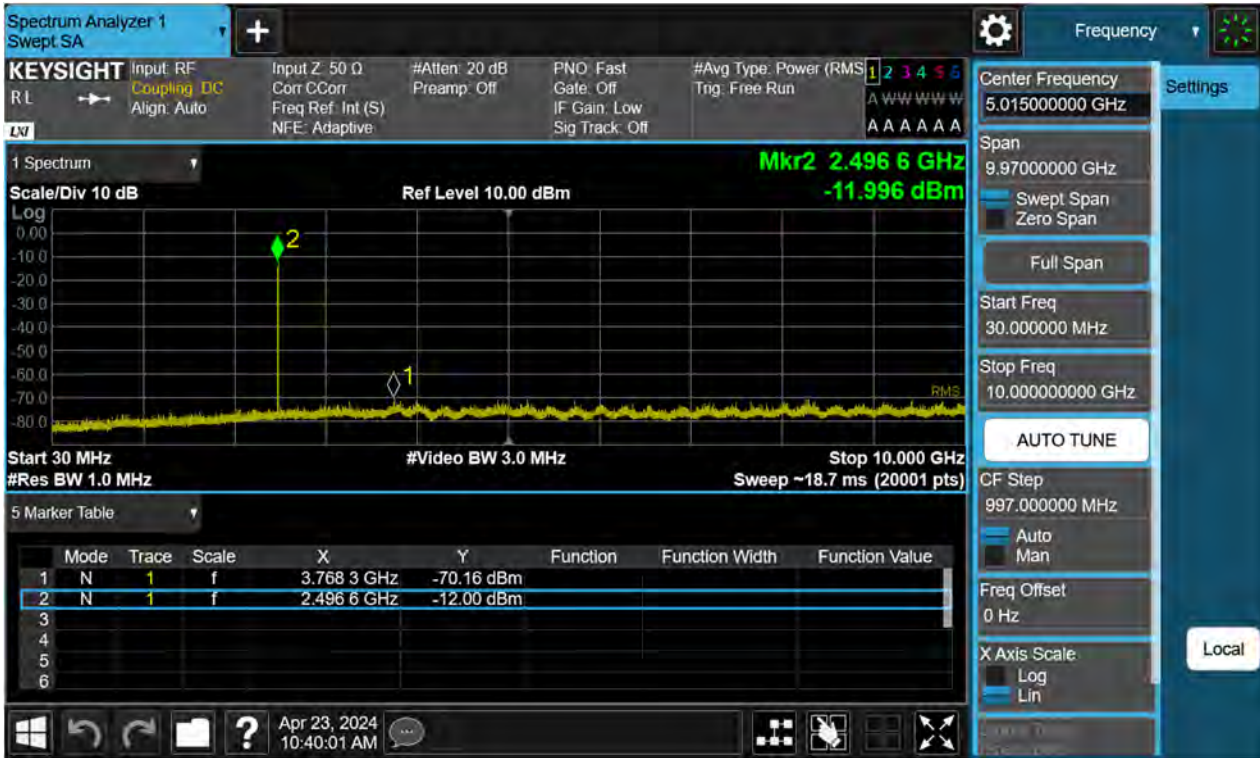


LTE41\_10 M\_CSE(30 M-10 G)\_ Mid Channel

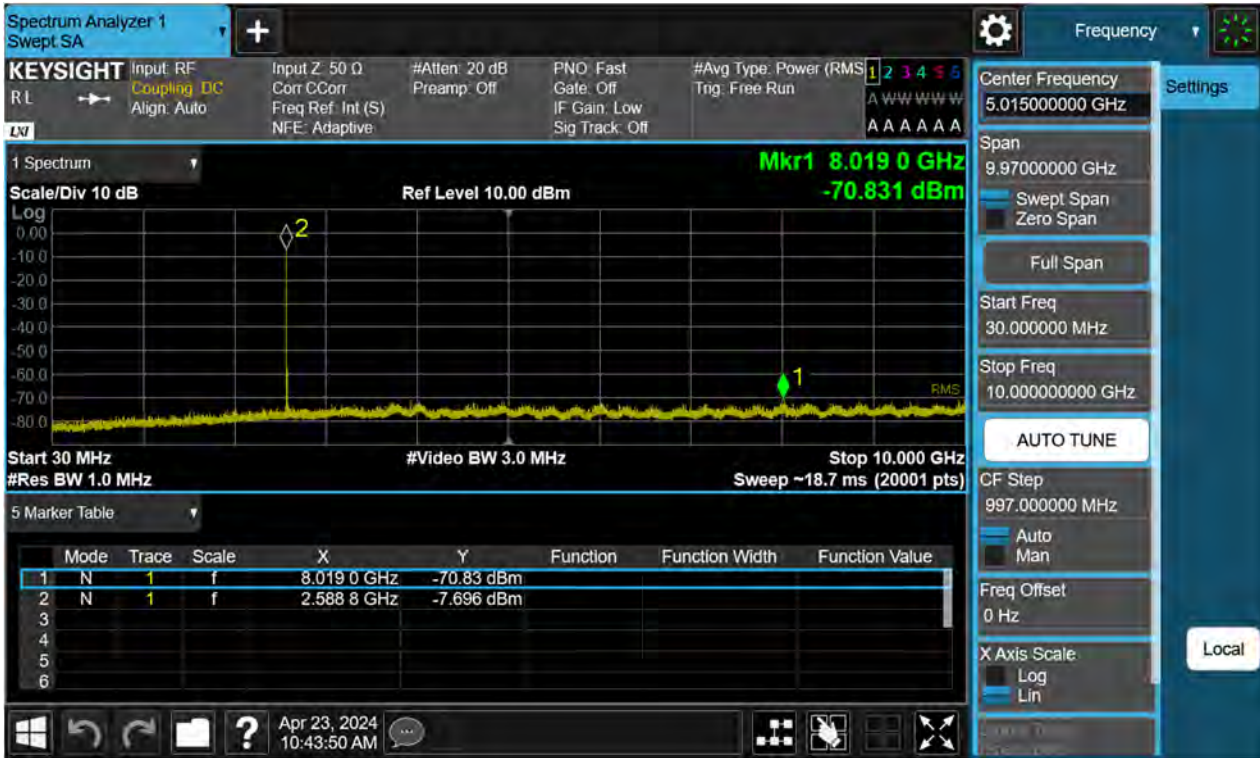

LTE41\_10 M\_CSE(30 M-10 G)\_ Highest Channel

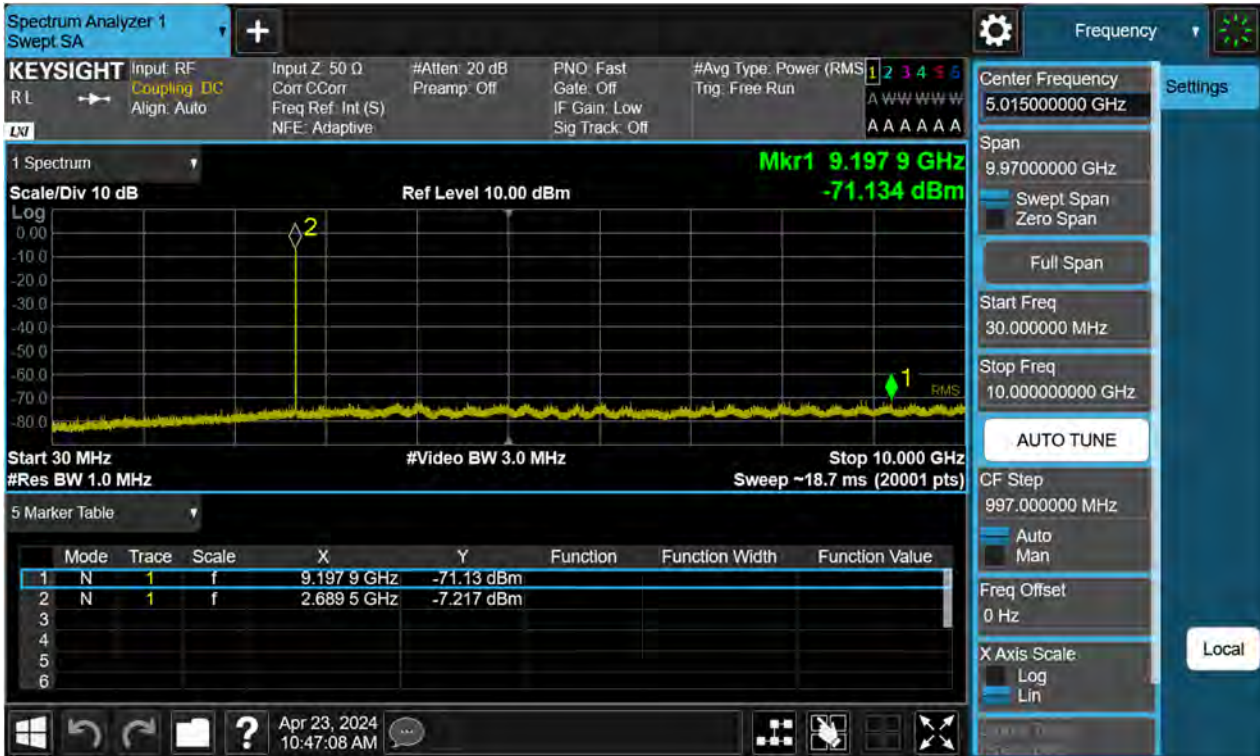


LTE41\_15 M\_CSE(30 M-10 G)\_ Lowest Channel

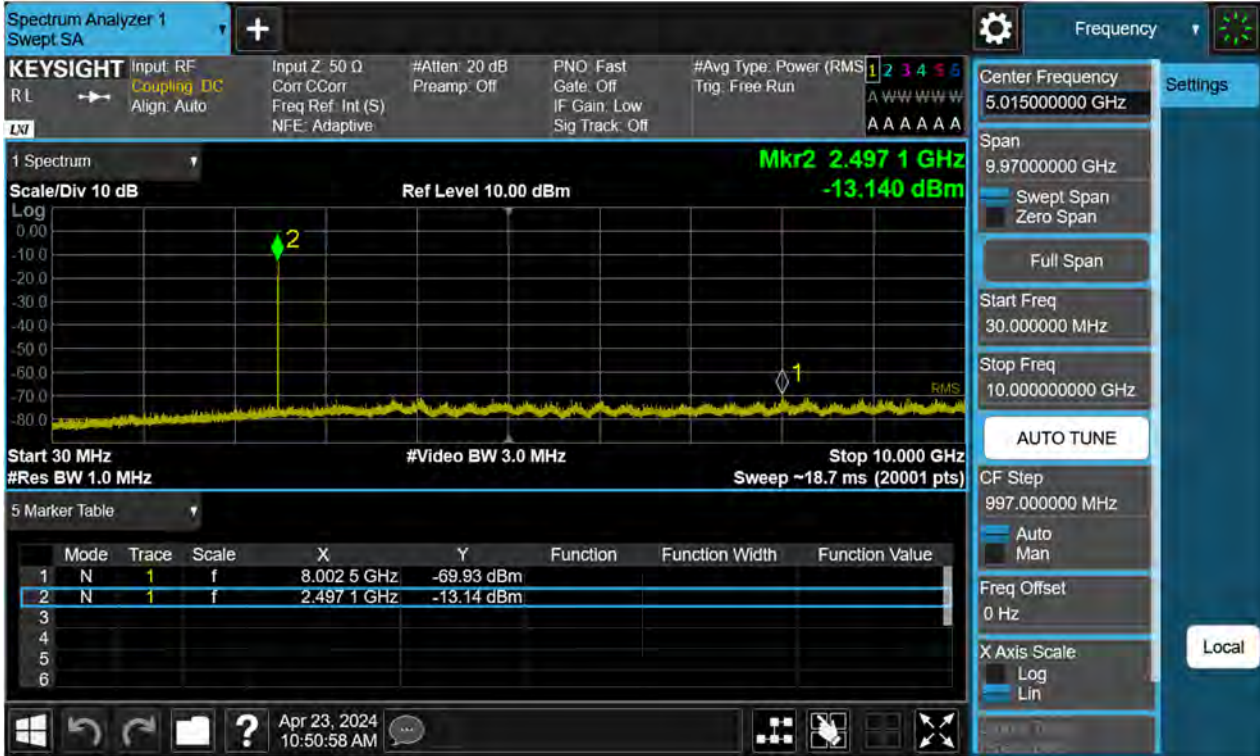





LTE41\_15 M\_CSE(30 M-10 G)\_ Mid Channel

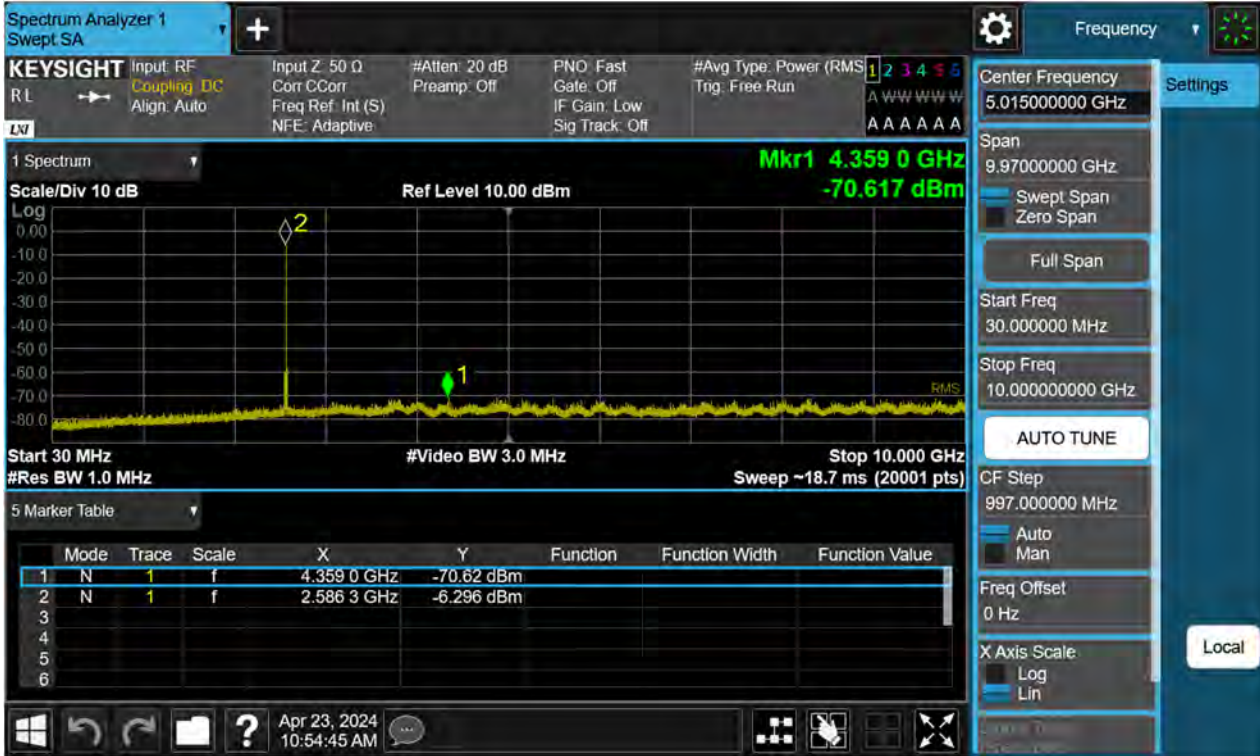


LTE41\_15 M\_CSE(30 M-10 G)\_ Highest Channel

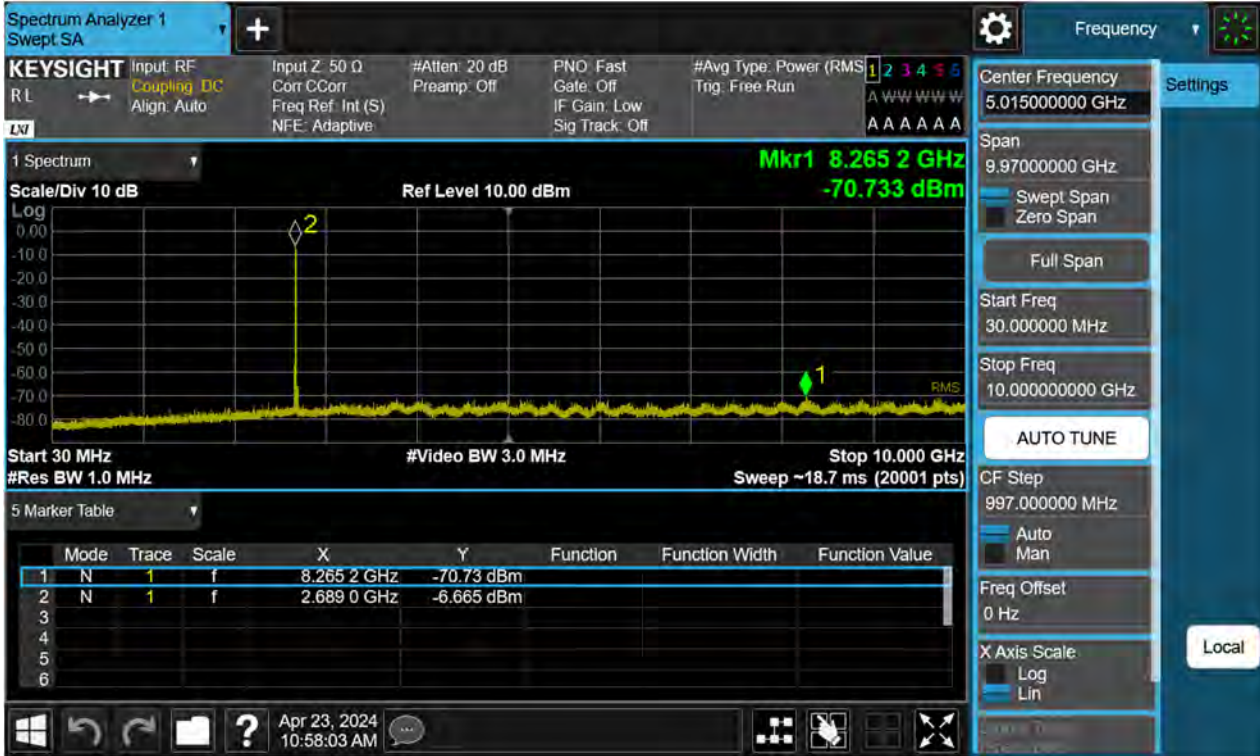

LTE41\_20 M\_CSE(30 M-10 G)\_ Lowest Channel

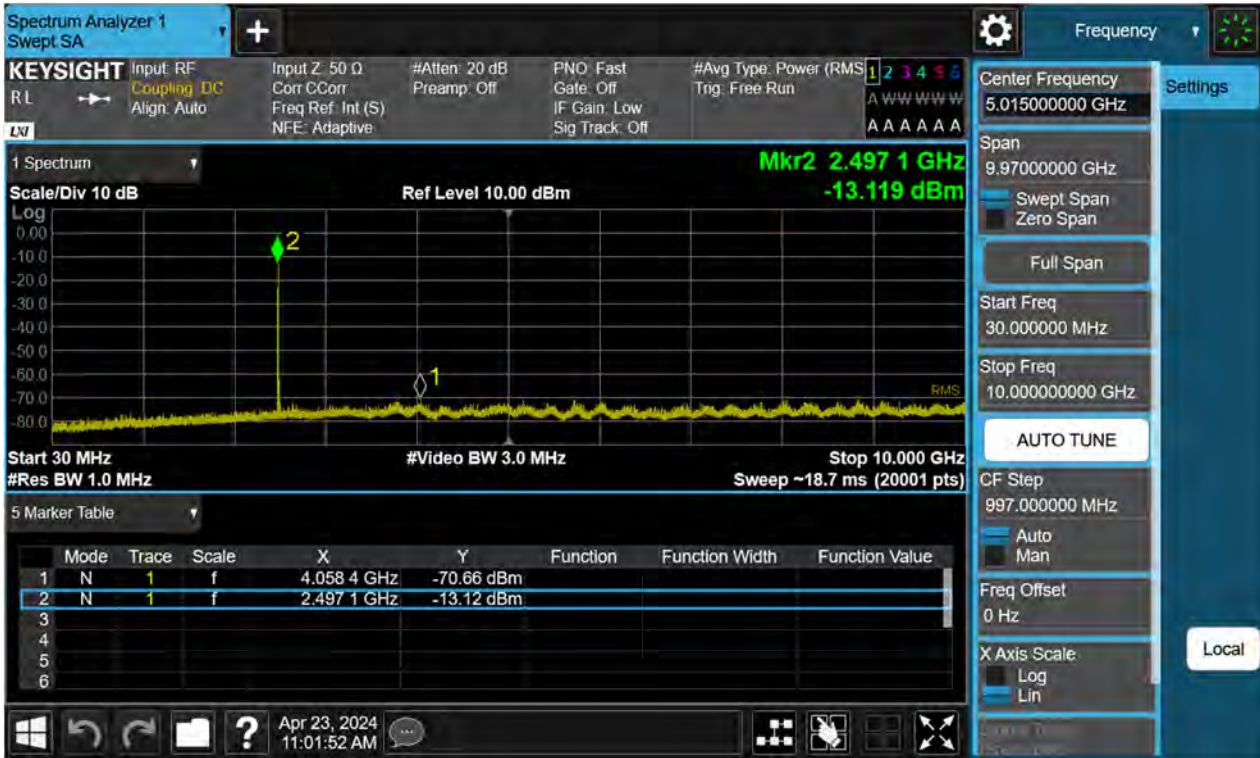


LTE41\_20 M\_CSE(30 M-10 G)\_ Mid Channel

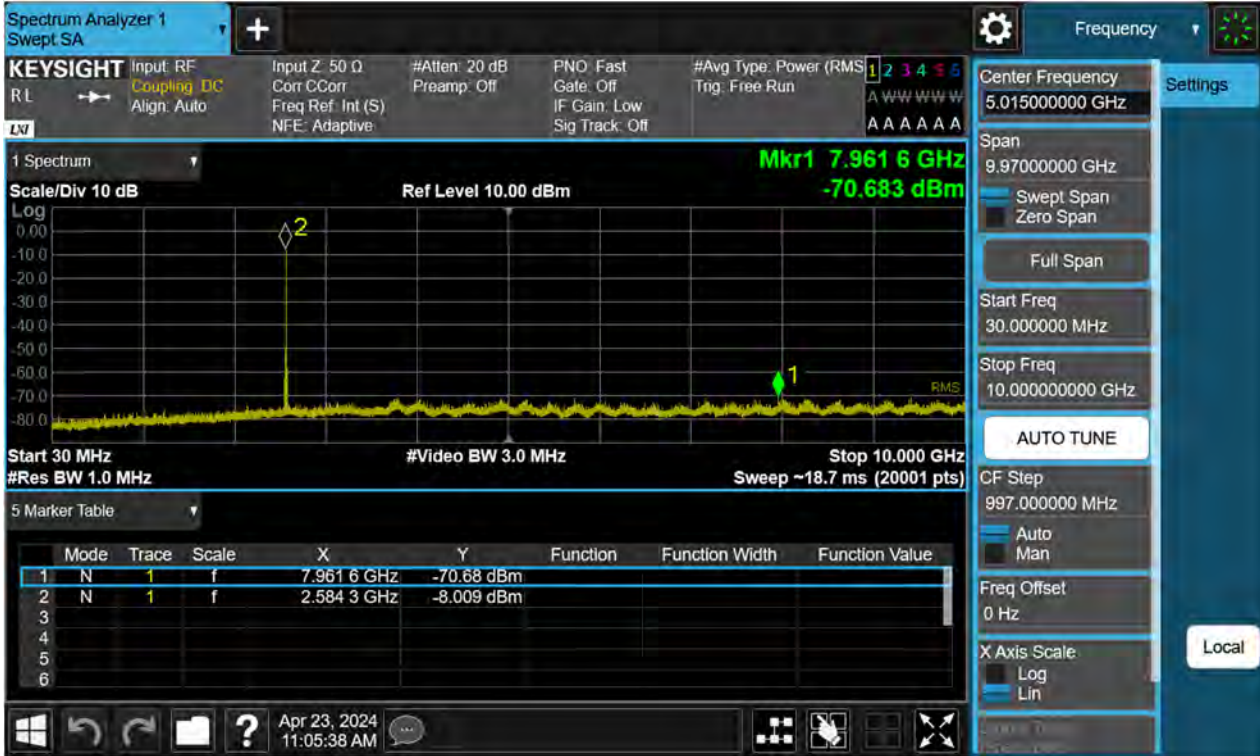





LTE41\_20 M\_CSE(30 M-10 G)\_ Highest Channel

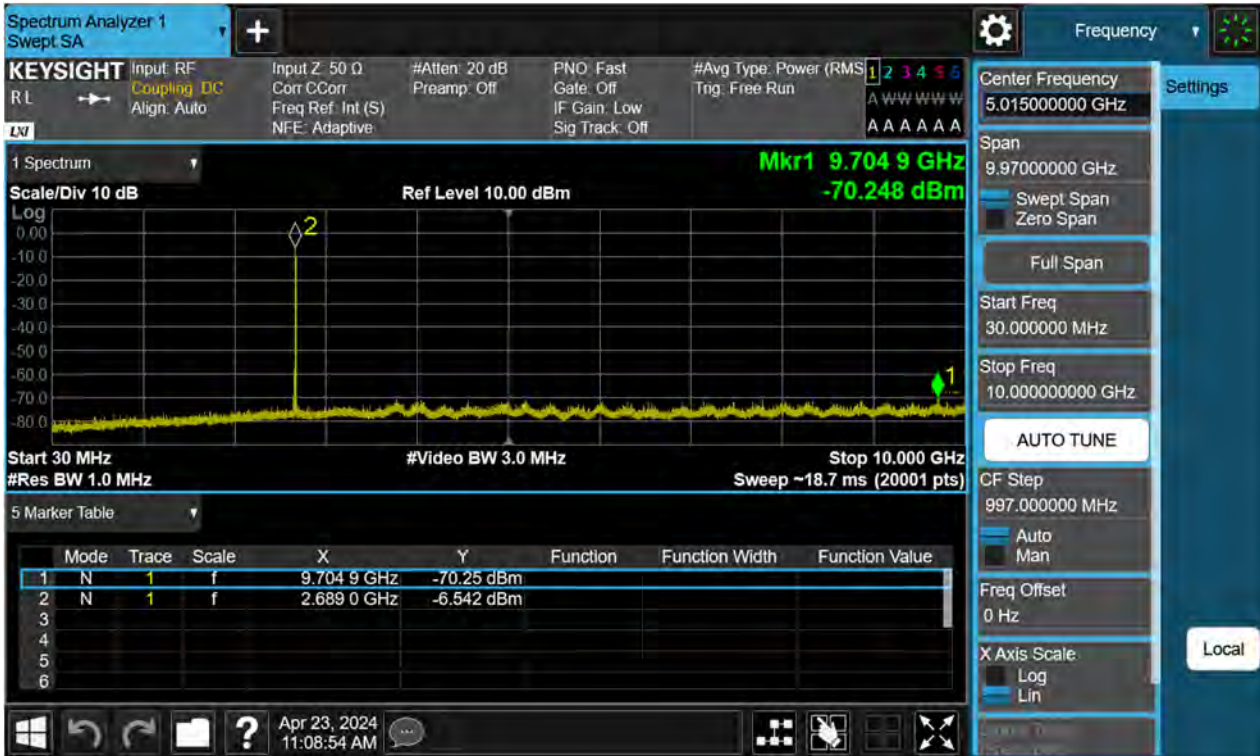

LTE41\_5 M\_CSE(Above10 G)\_ Lowest Channel

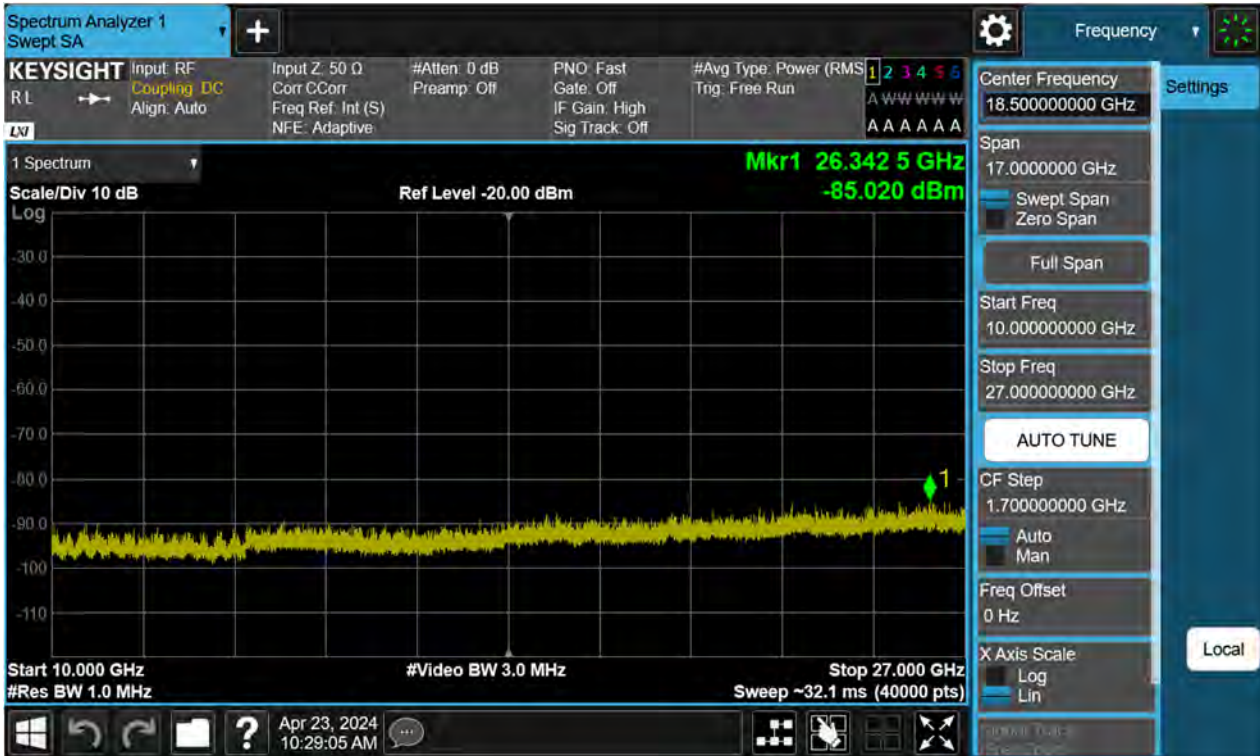


LTE41\_5 M\_CSE(Above10 G)\_ Mid Channel

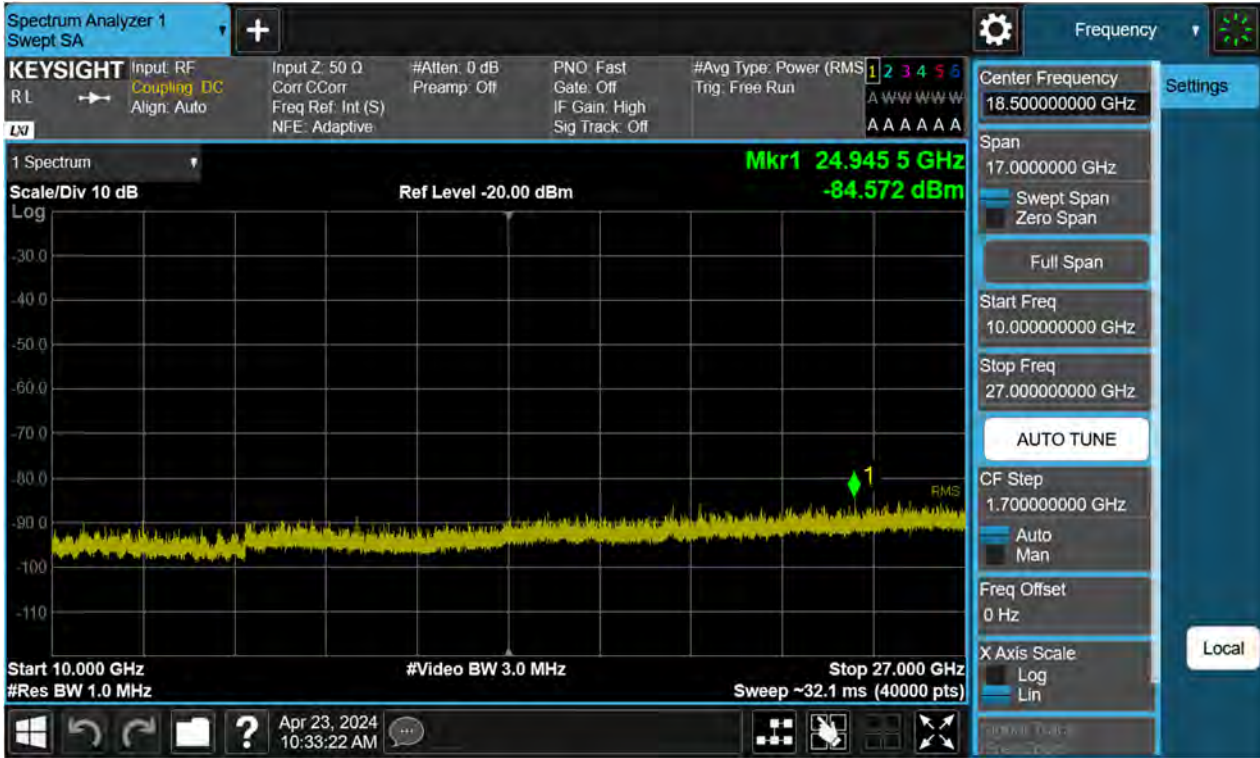




LTE41\_5 M\_CSE(Above10 G)\_ Highest Channel

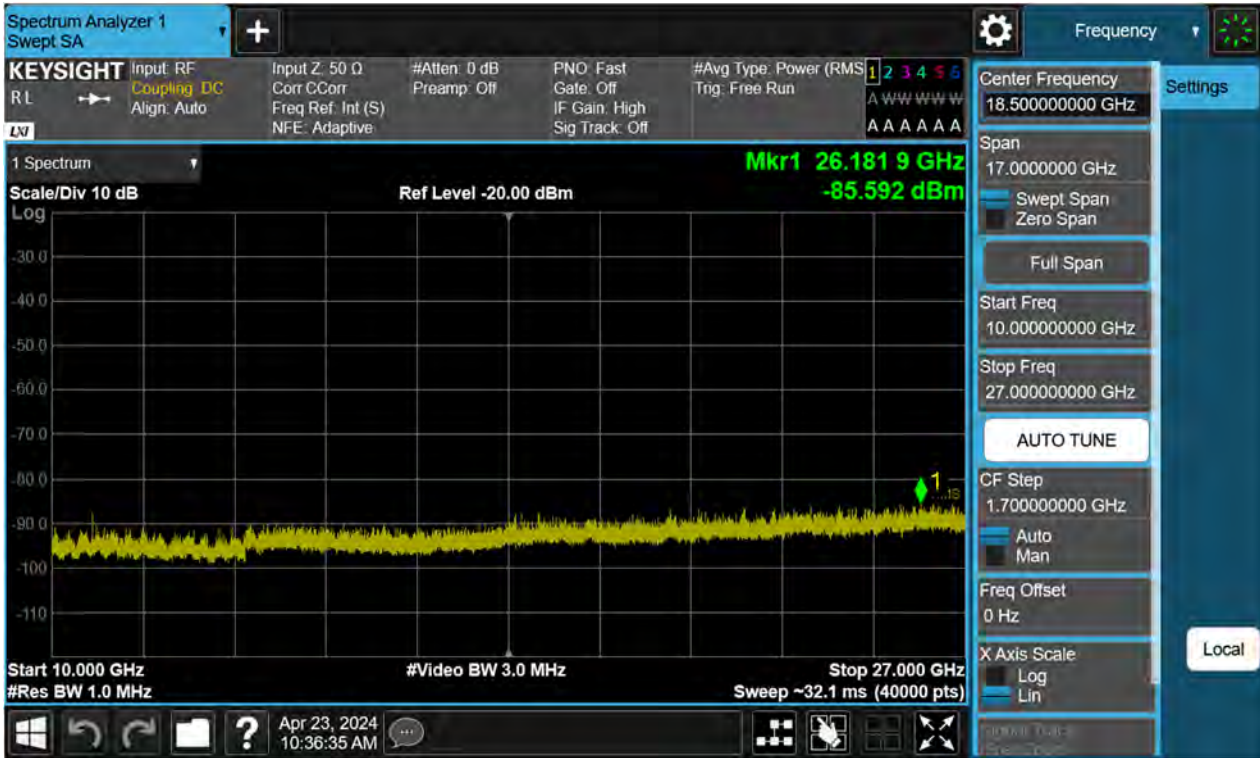

LTE41\_10 M\_CSE(Above10 G)\_ Lowest Channel

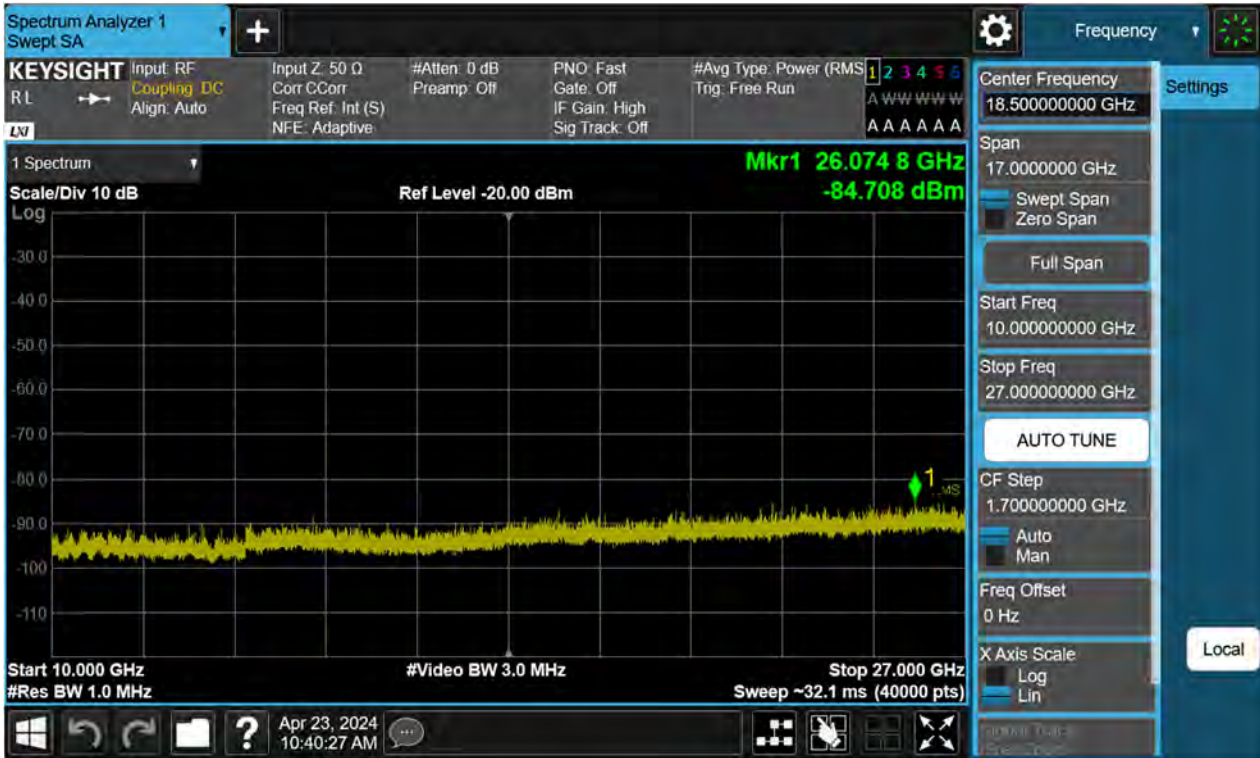

LTE41\_10 M\_CSE(Above10 G)\_ Mid Channel




LTE41\_10 M\_CSE(Above10 G)\_ Highest Channel






LTE41\_15 M\_CSE(Above10 G)\_ Lowest Channel

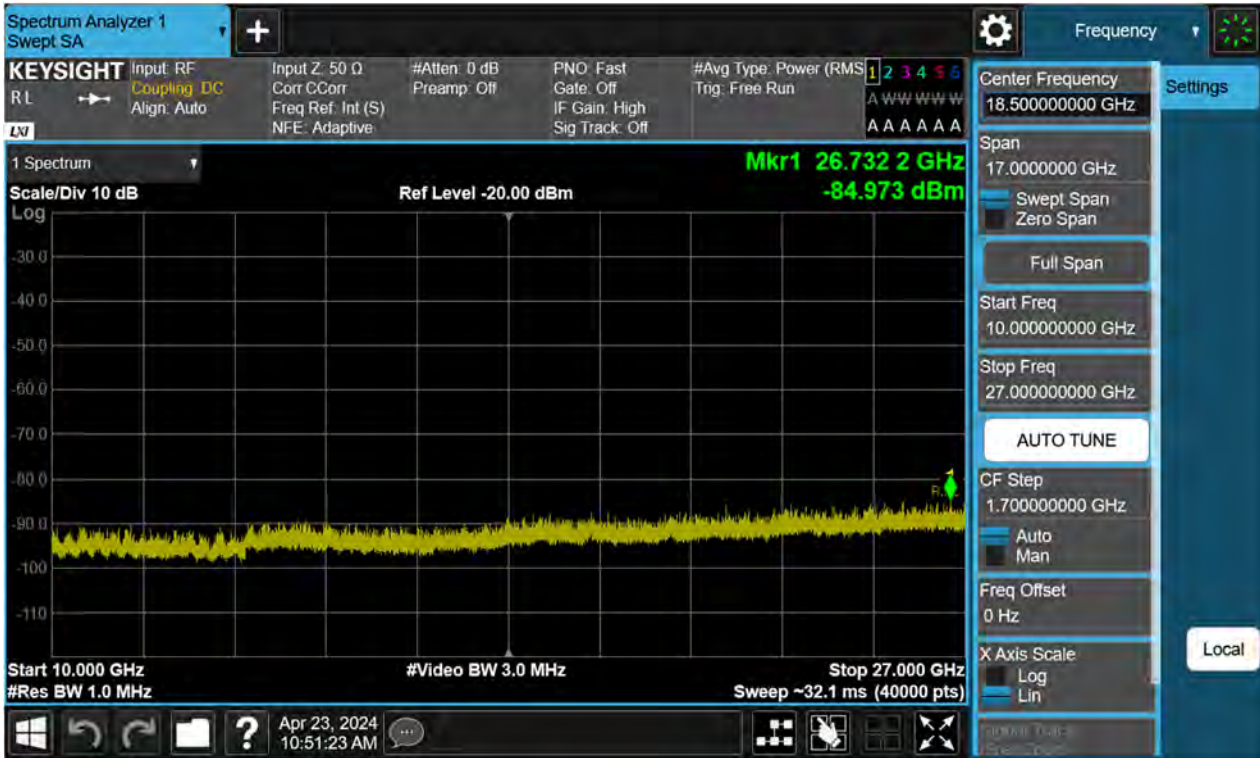

LTE41\_15 M\_CSE(Above10 G)\_Mid Channel

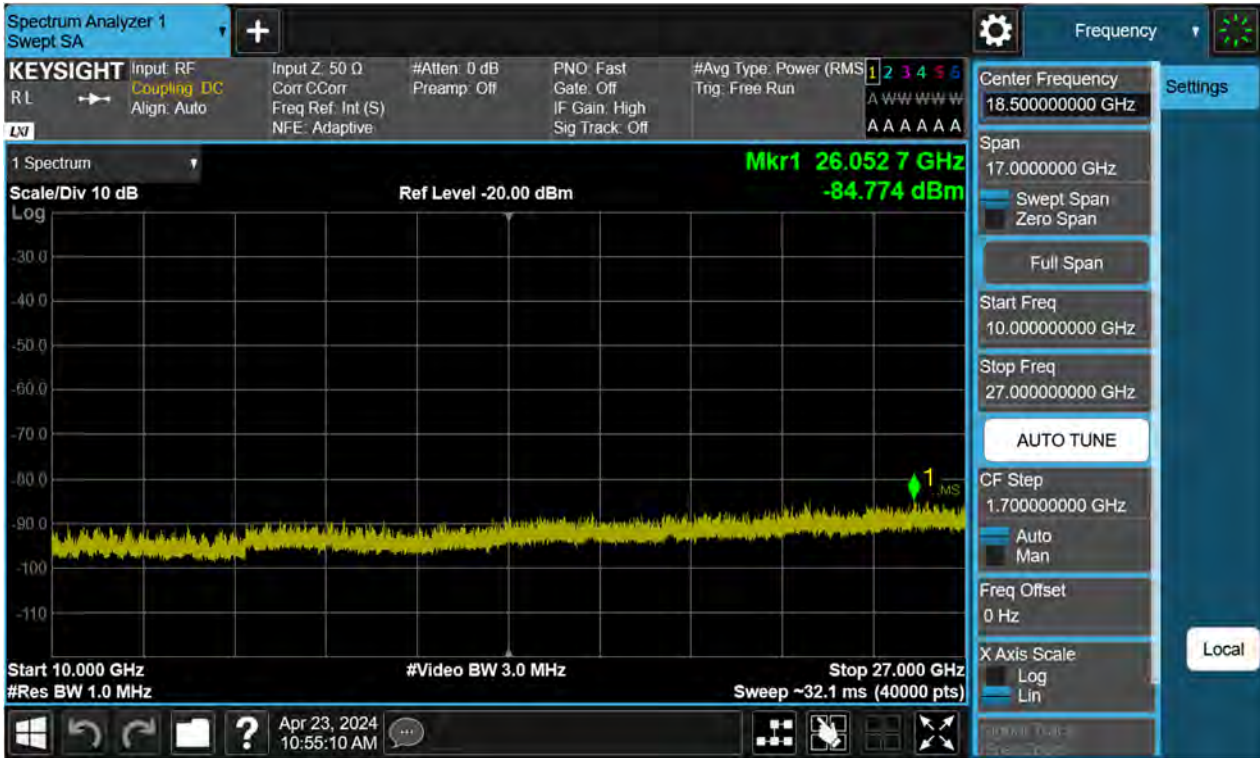


LTE41\_15 M\_CSE(Above10 G)\_ Highest Channel







LTE41\_20 M\_CSE(Above10 G)\_ Lowest Channel

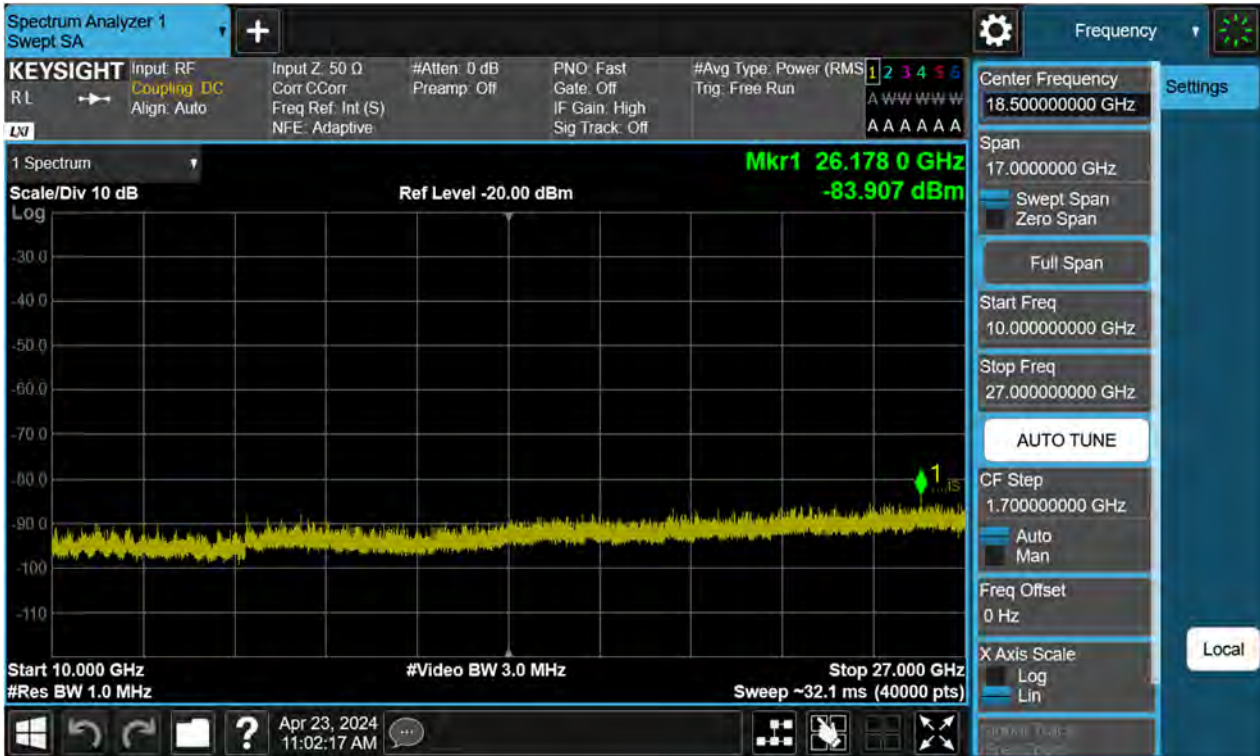

LTE41\_20 M\_CSE(Above10 G)\_Mid Channel

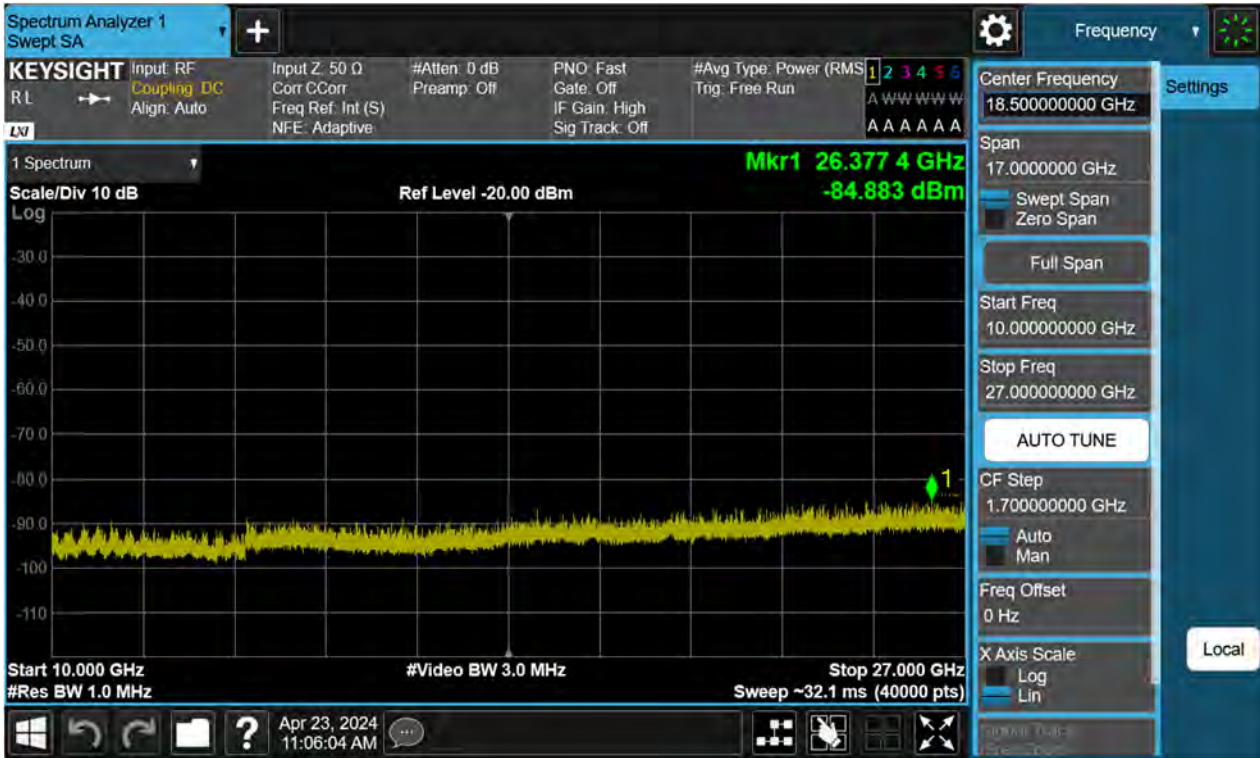


LTE41\_20 M\_CSE(Above10 G)\_ Highest Channel

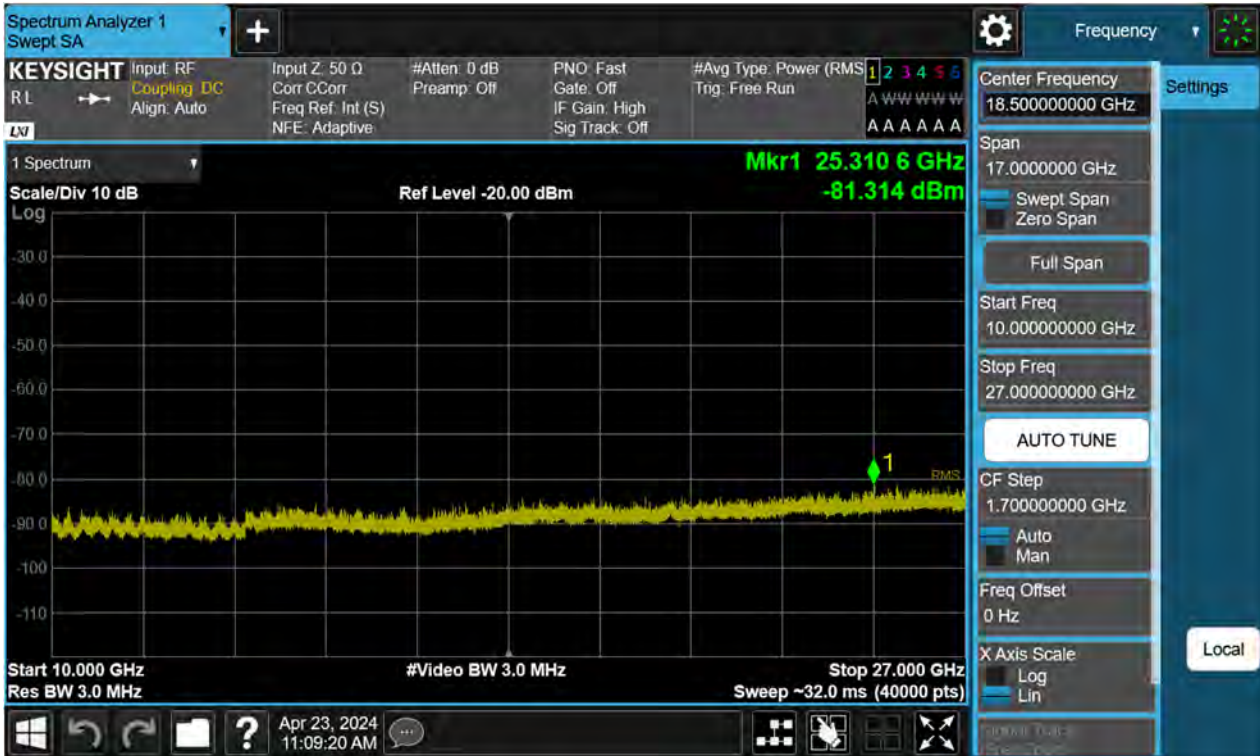


## 11. TEST PLOTS(Sub 5 Ant)

LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_FullRB

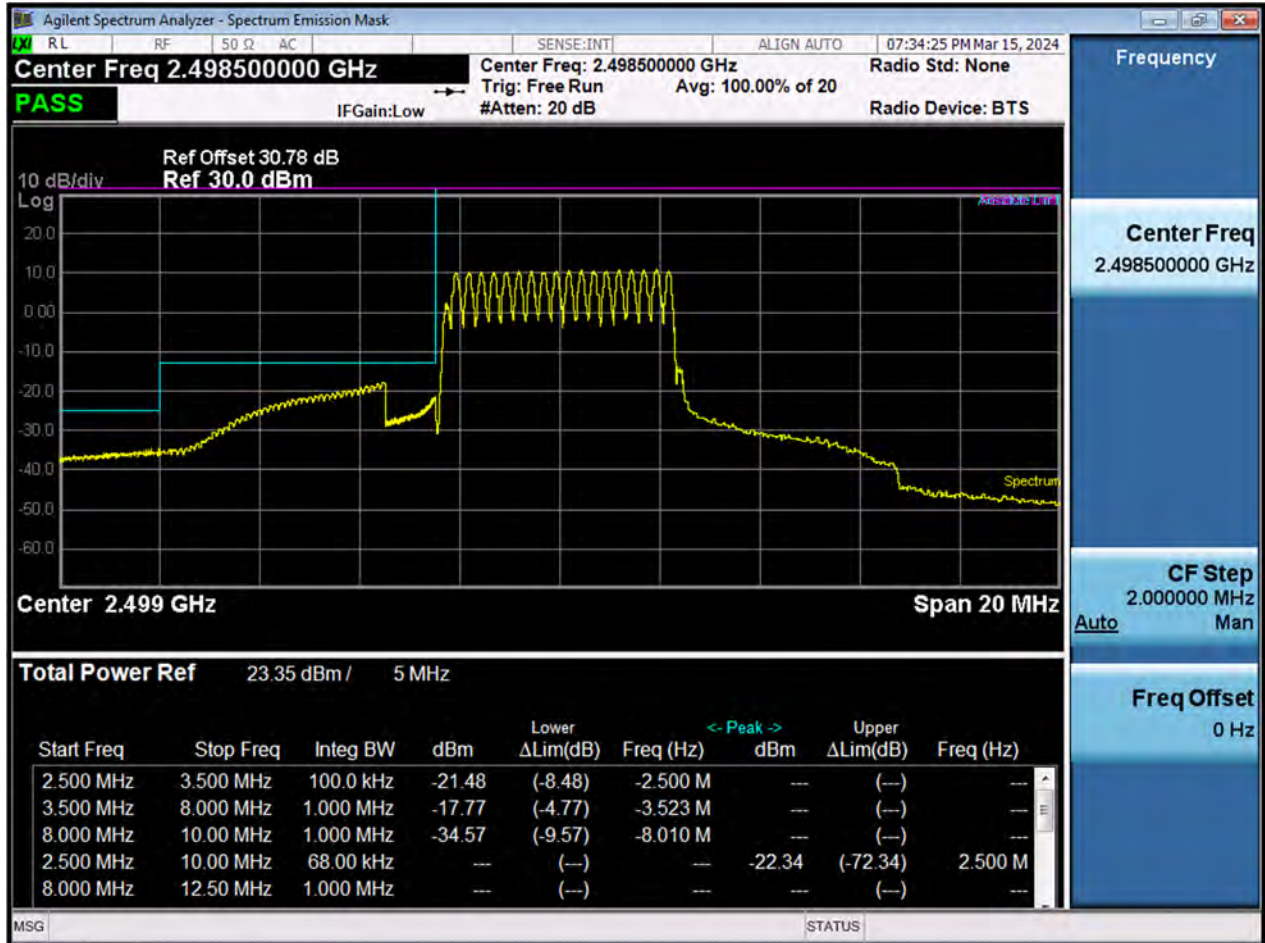




LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_FullRB

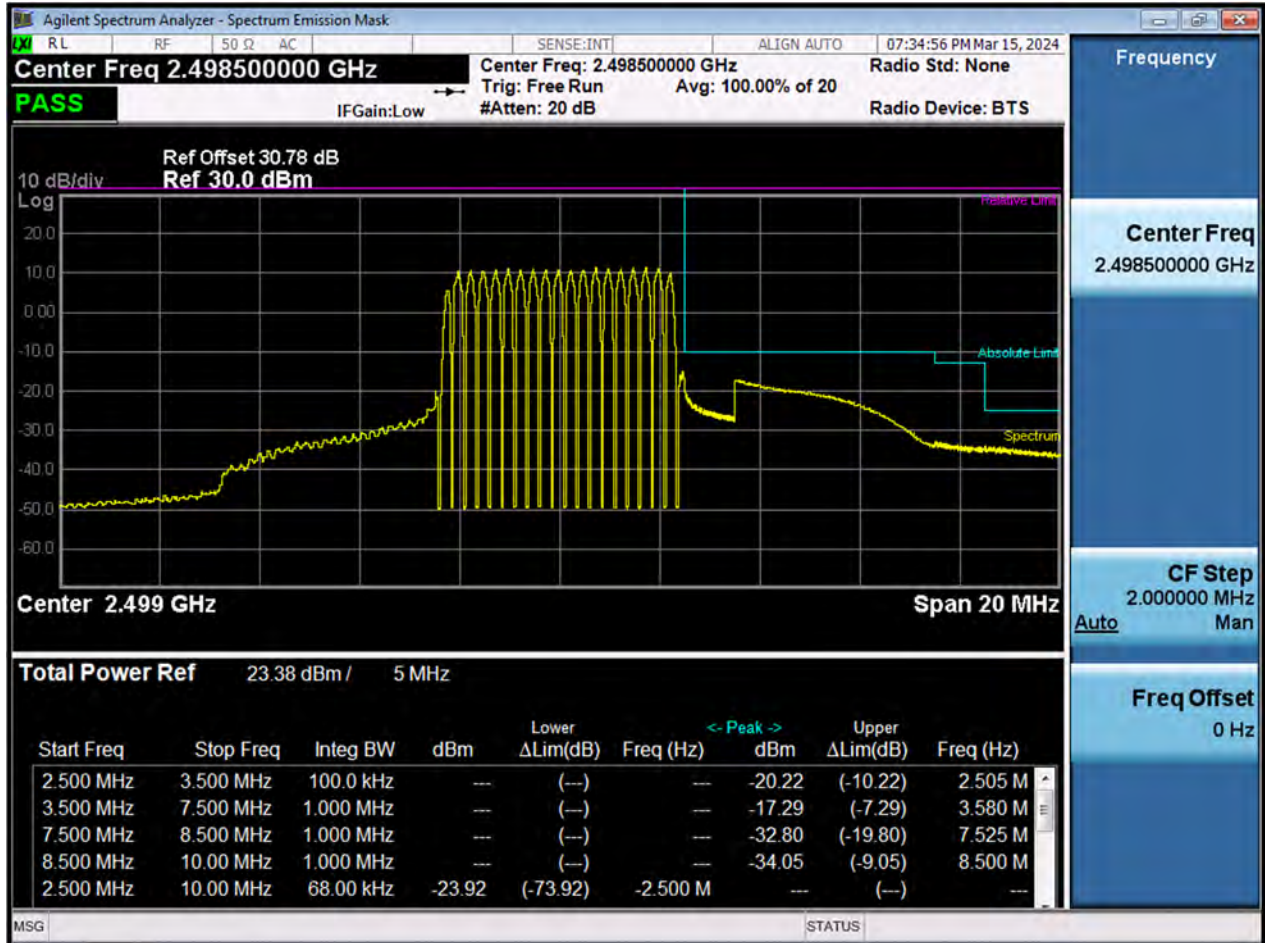


LTE41\_5 M\_BandEdge\_Lower\_Low\_2498.5 MHz\_QPSK\_1RB

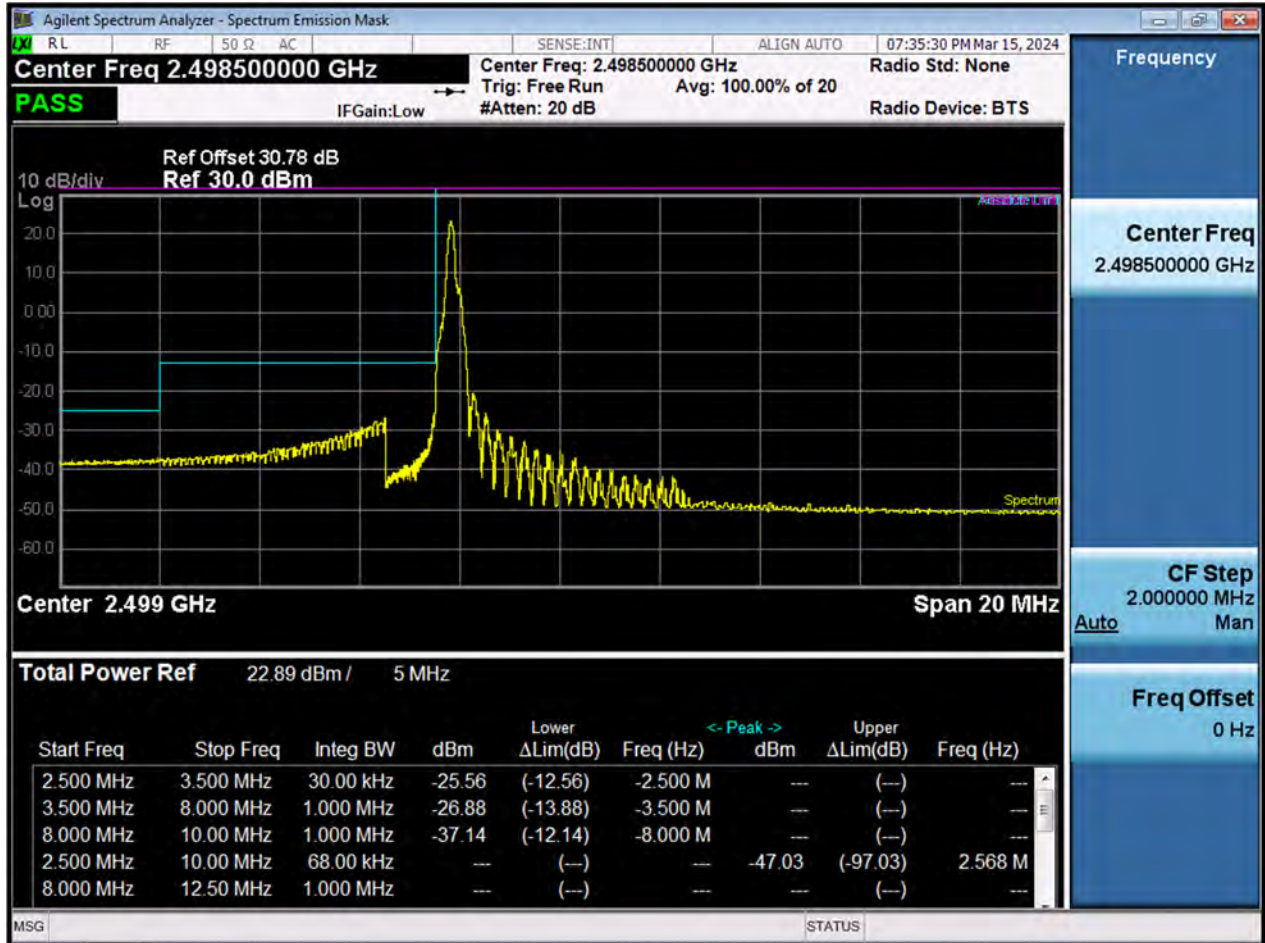





LTE41\_5 M\_BandEdge\_Upper\_Low\_2498.5 MHz\_QPSK\_1RB

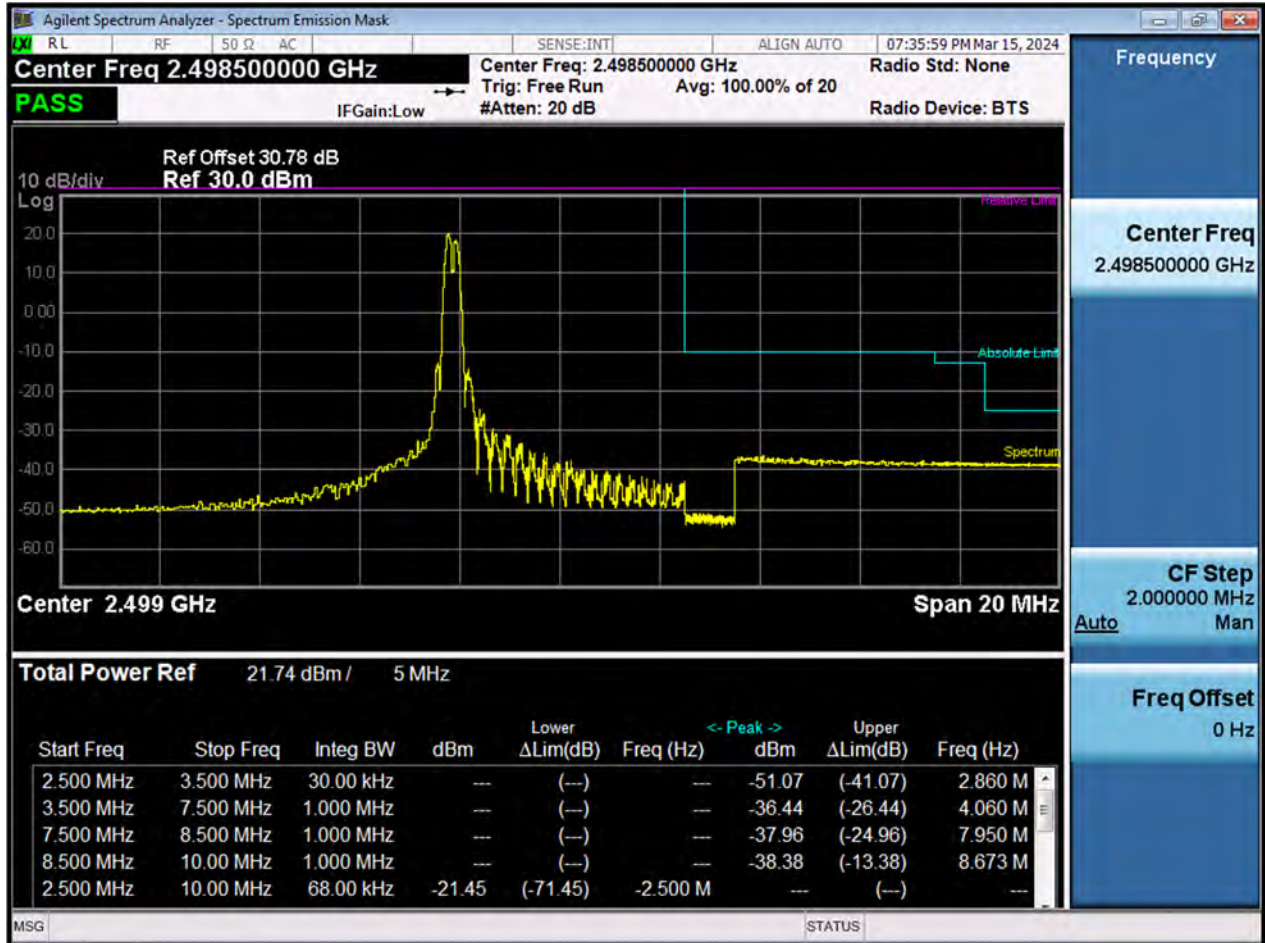


LTE41\_5 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB

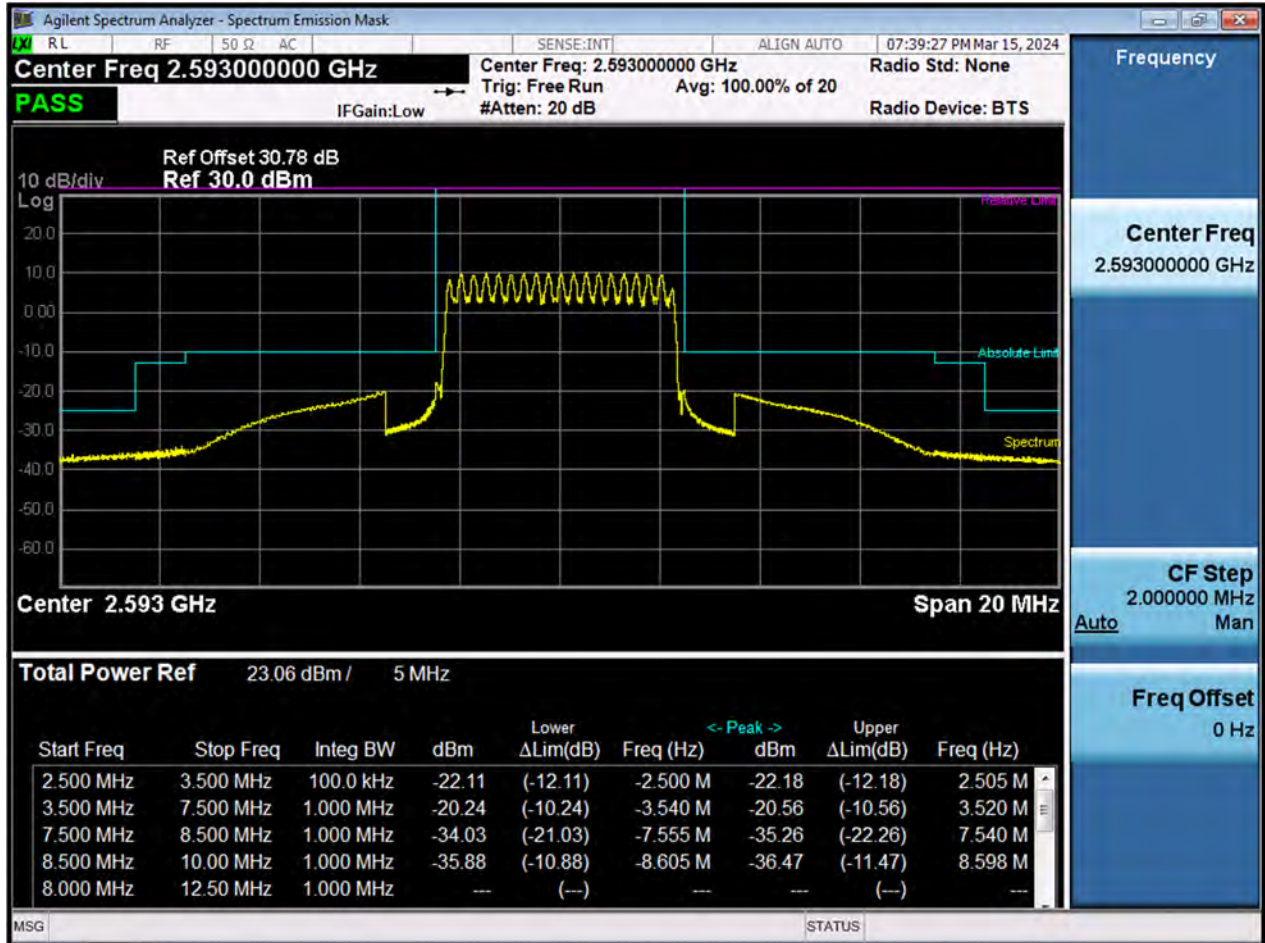

LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_FullRB

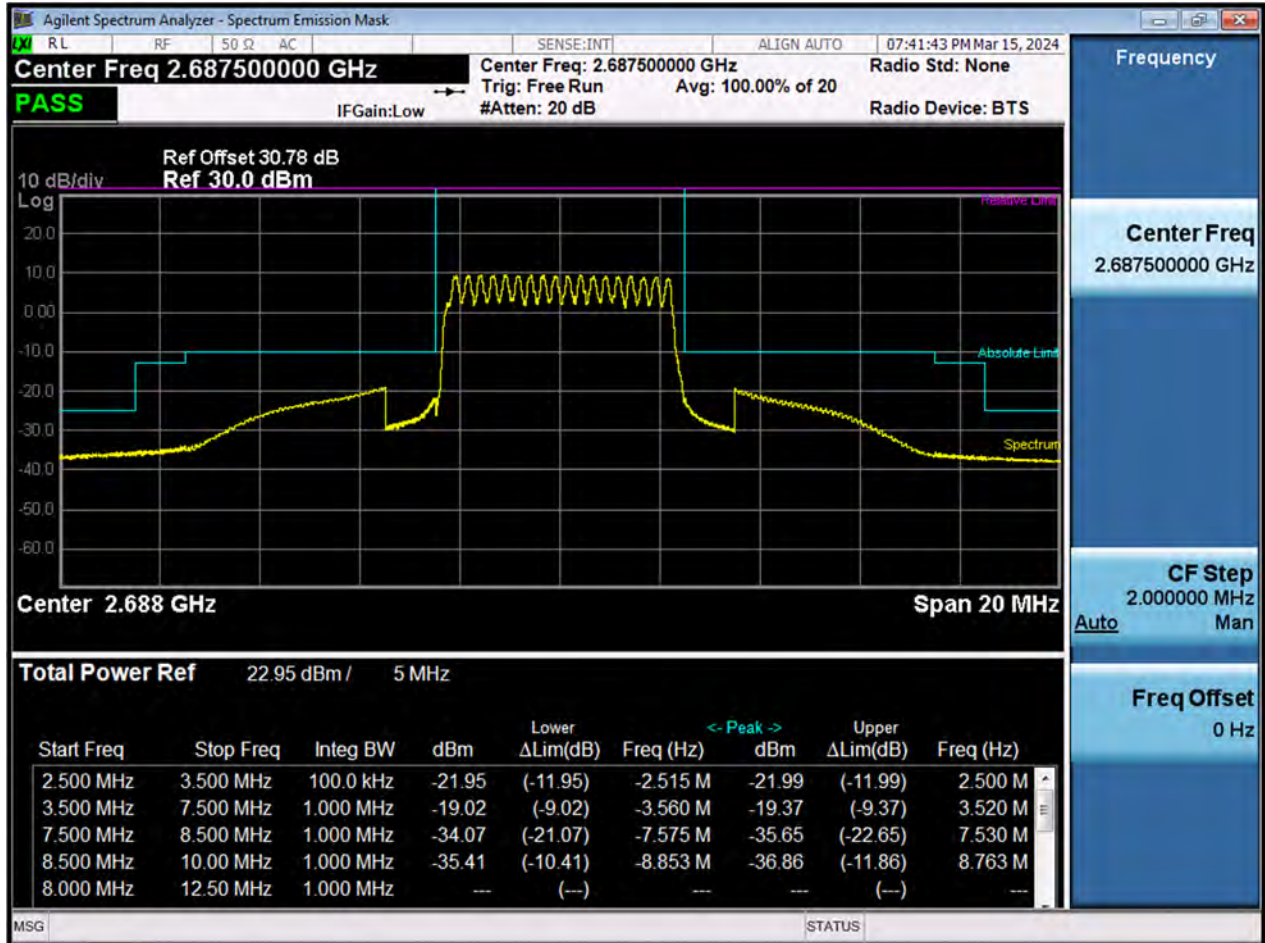


LTE41\_5 M\_BandEdge\_High\_2687.5 MHz\_QPSK\_1RB

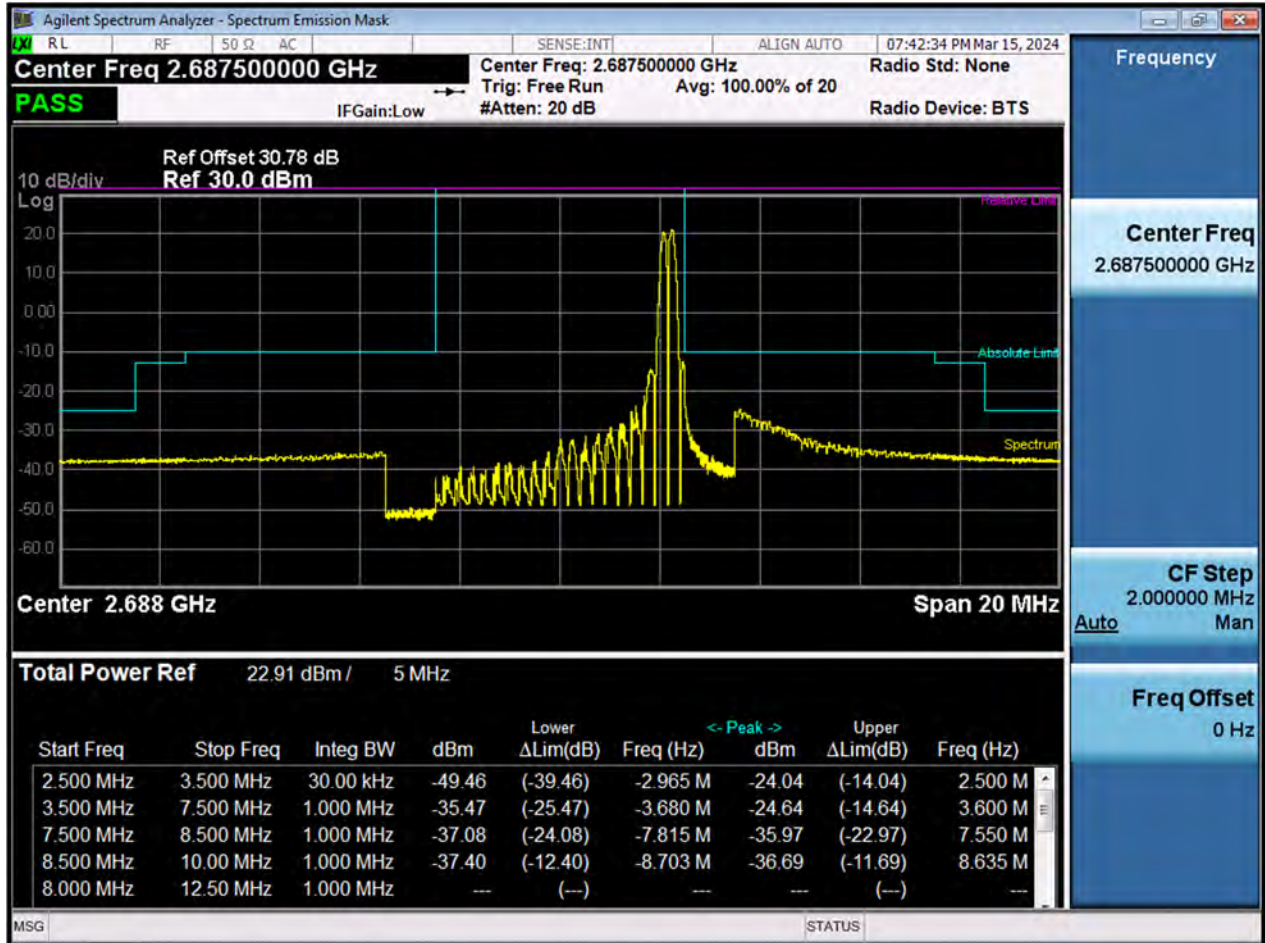




LTE41\_10 M\_BandEdge\_Lower\_Low\_2501 MHz\_QPSK\_FullRB

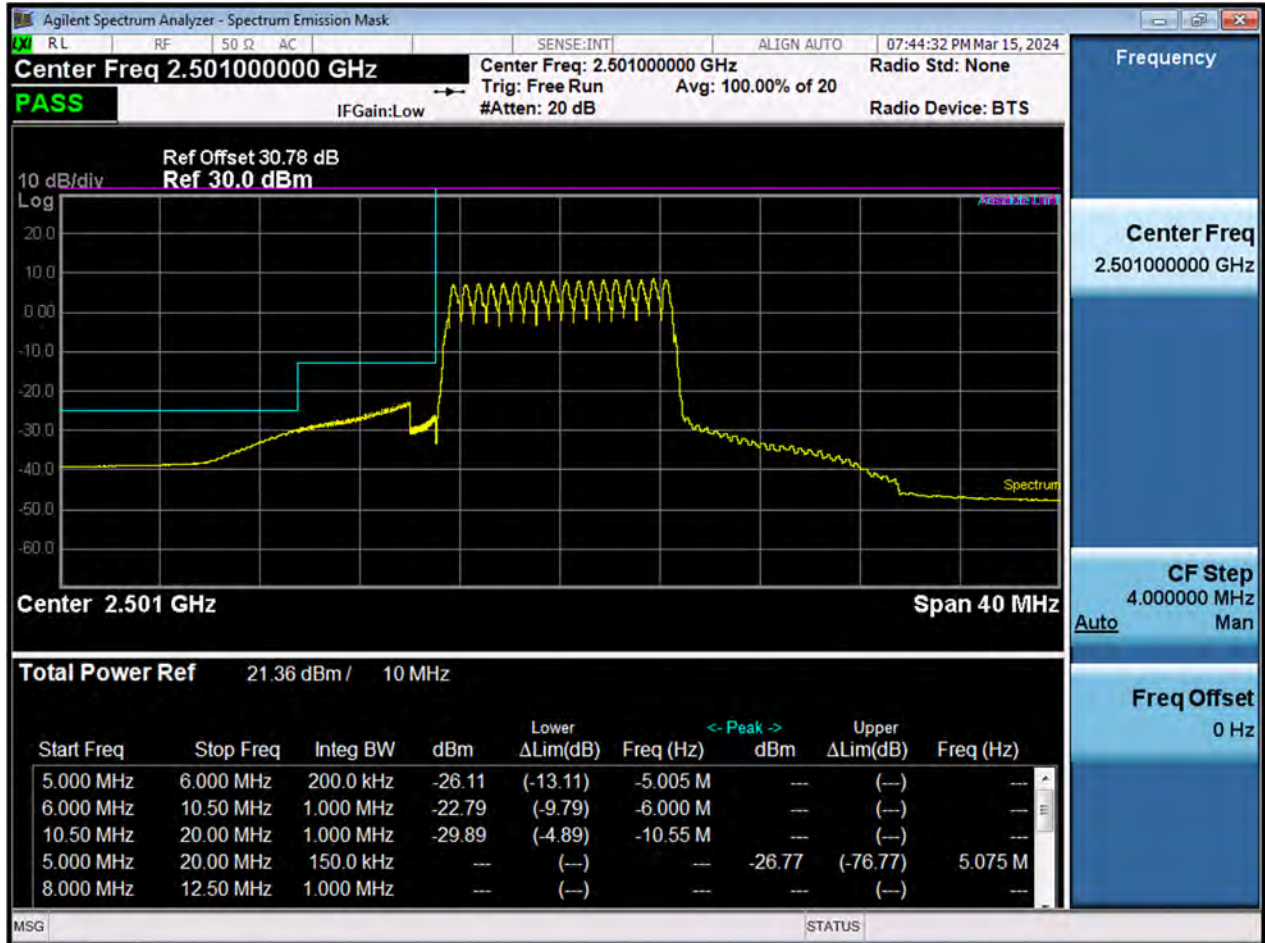


LTE41\_10 M\_BandEdge\_Upper\_Low\_2501 MHz\_QPSK\_FullRB

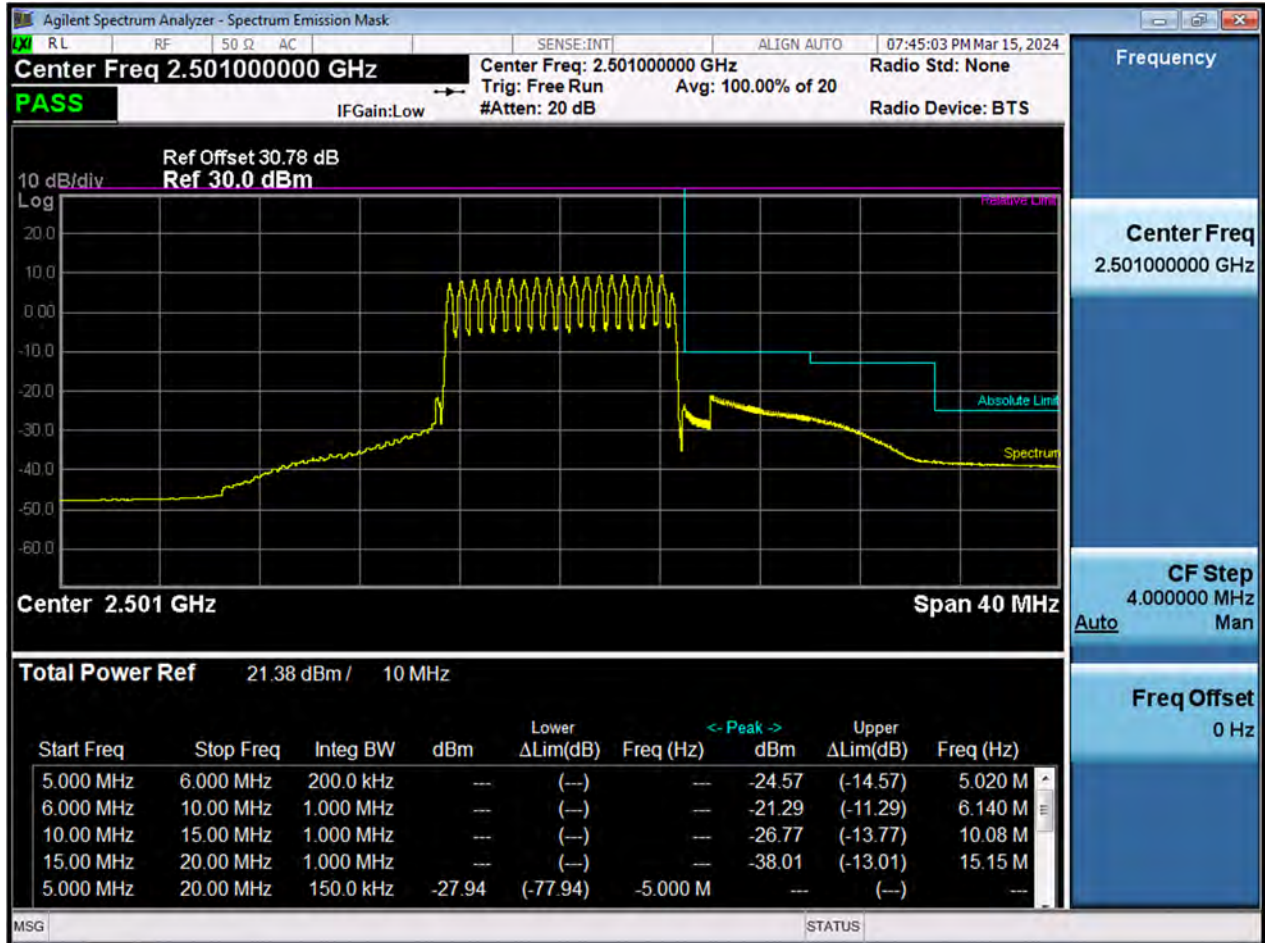





LTE41\_10 M\_BandEdge\_Lower\_Low\_2501 MHz\_QPSK\_1RB

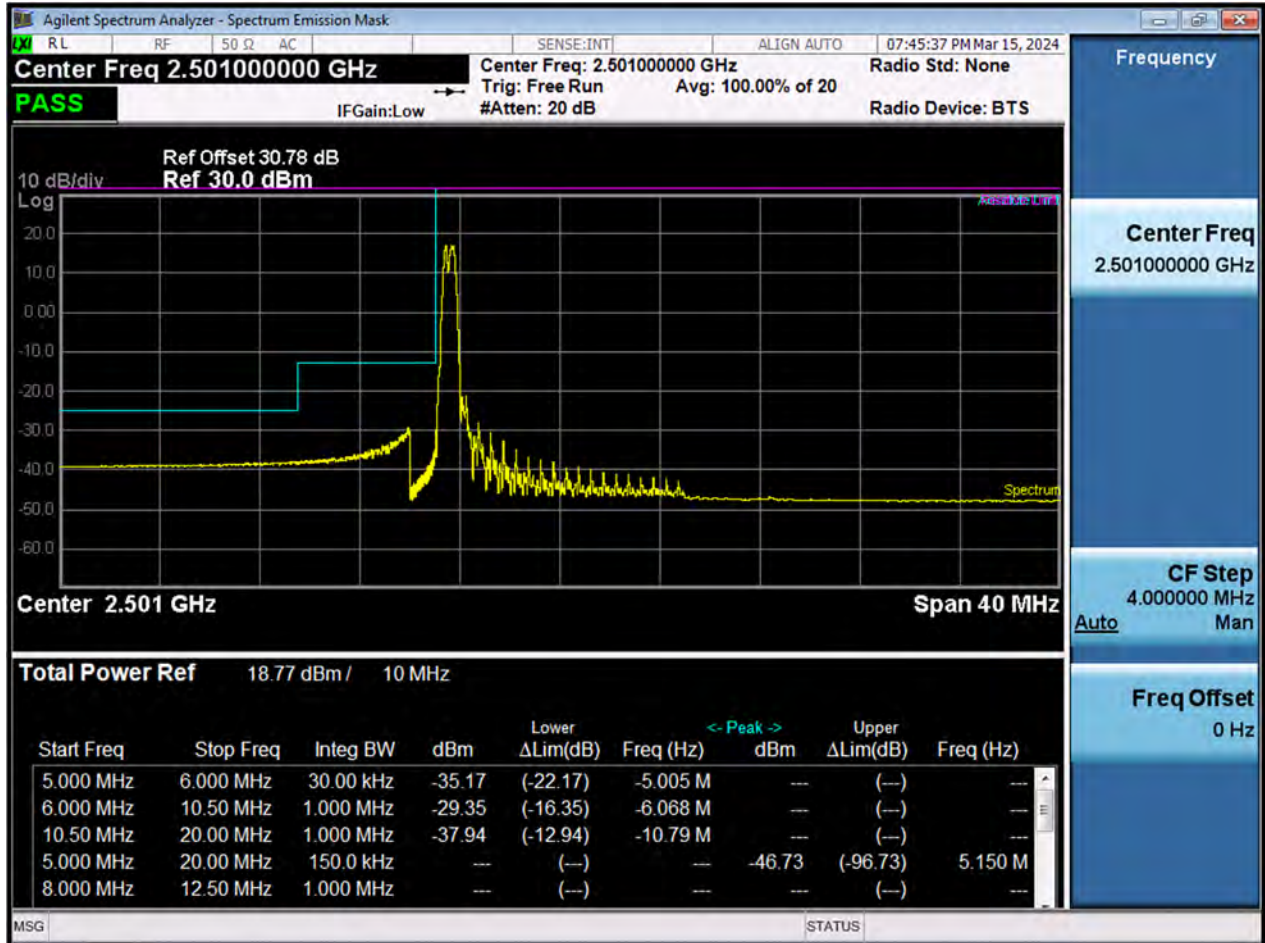


LTE41\_10 M\_BandEdge\_Upper\_Low\_2501 MHz\_QPSK\_1RB

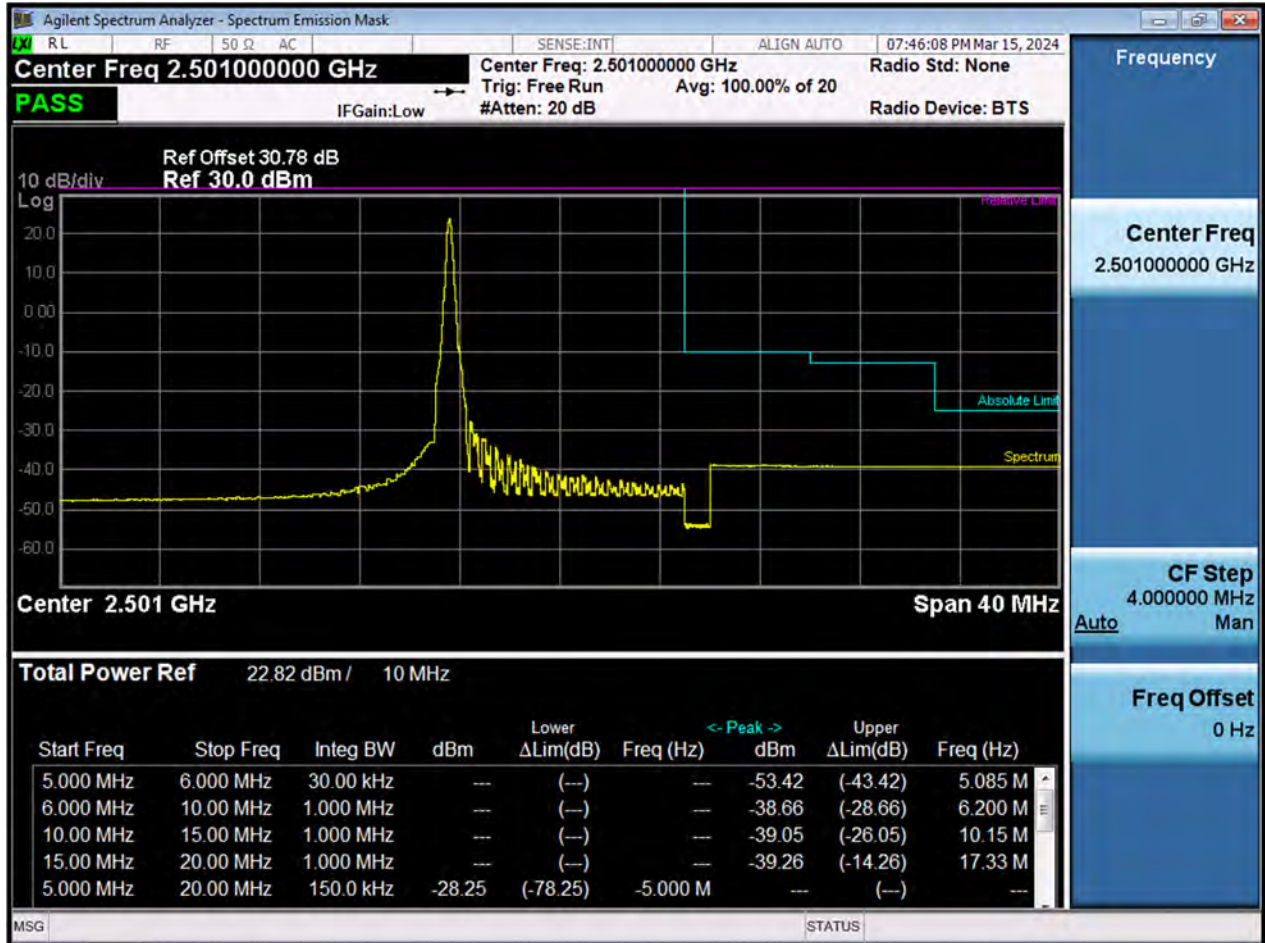

LTE41\_10 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB

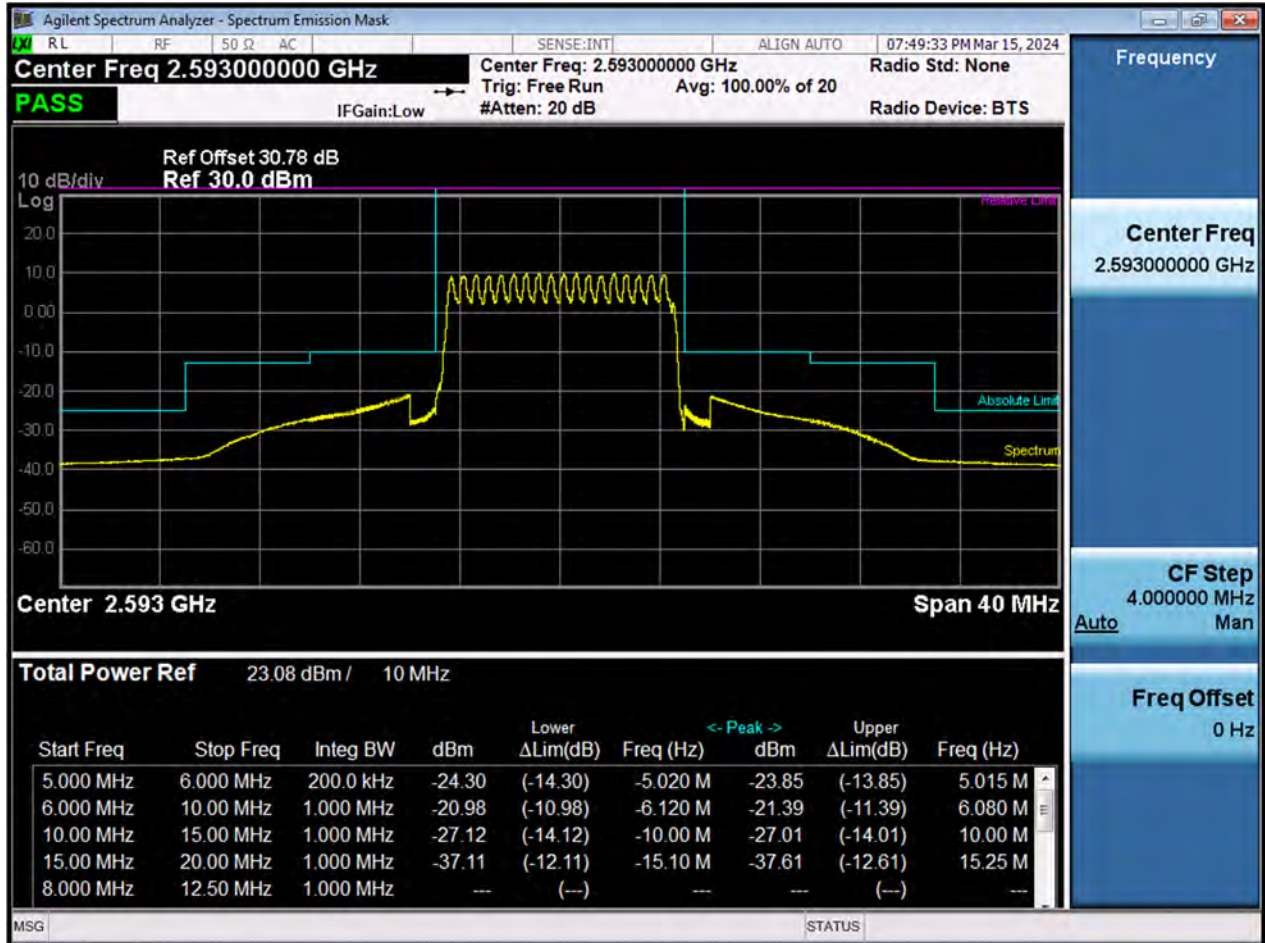


LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_FullIRB

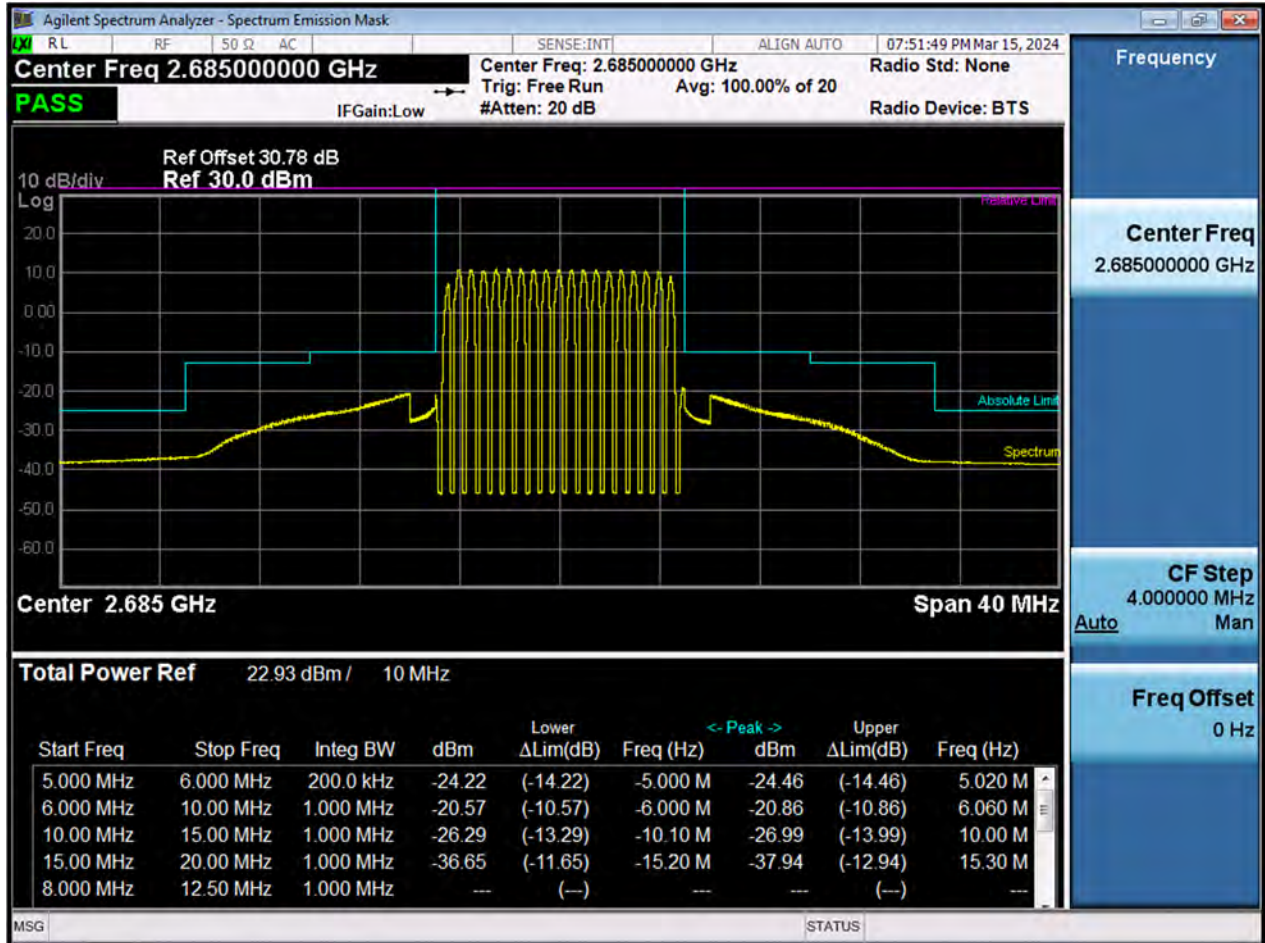



LTE41\_10 M\_BandEdge\_High\_2685 MHz\_QPSK\_1RB

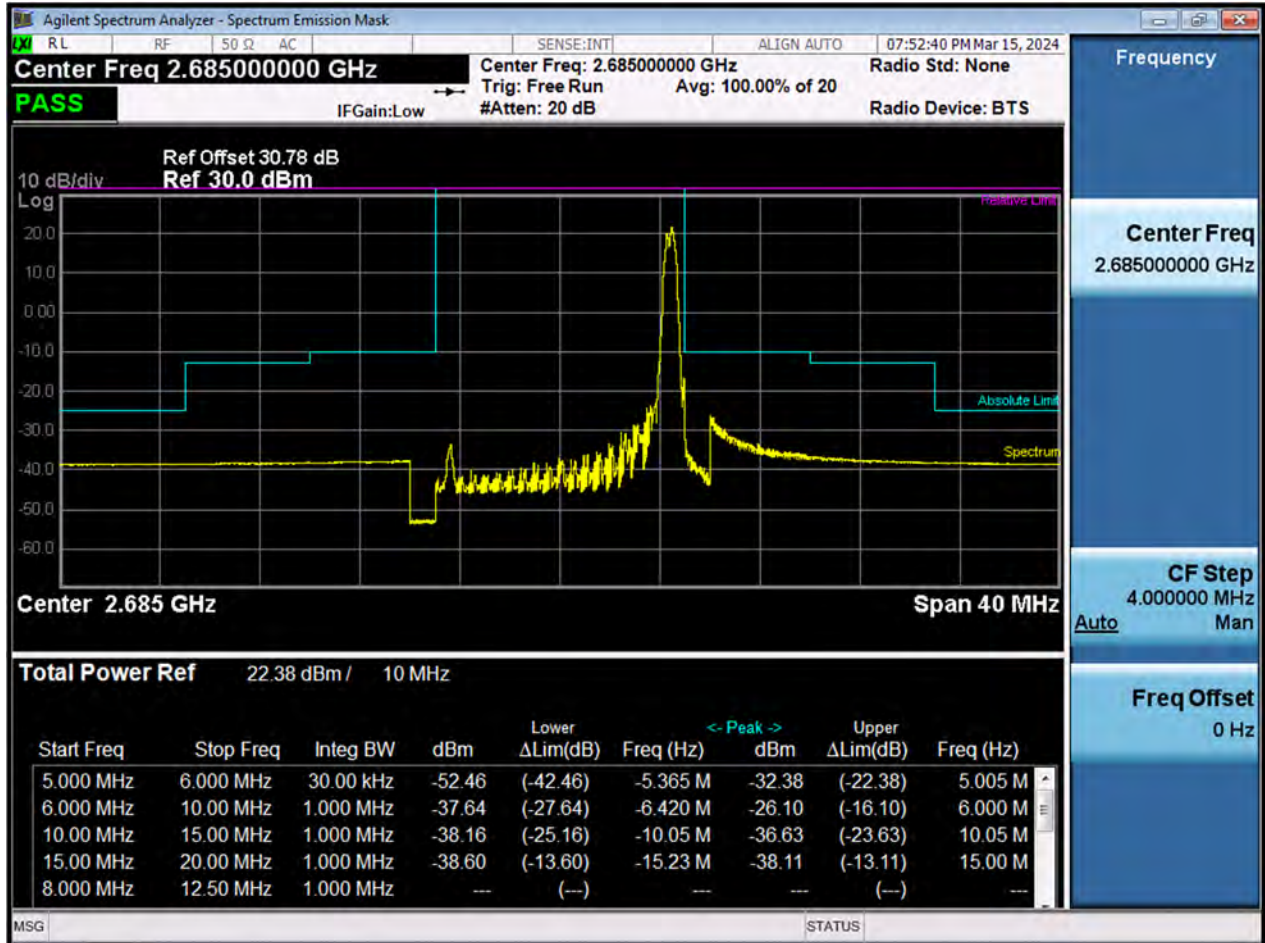

LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_FullRB







LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_FullRB




## LTE41\_15 M\_BandEdge\_Lower\_Low\_2503.5 MHz\_QPSK\_1RB

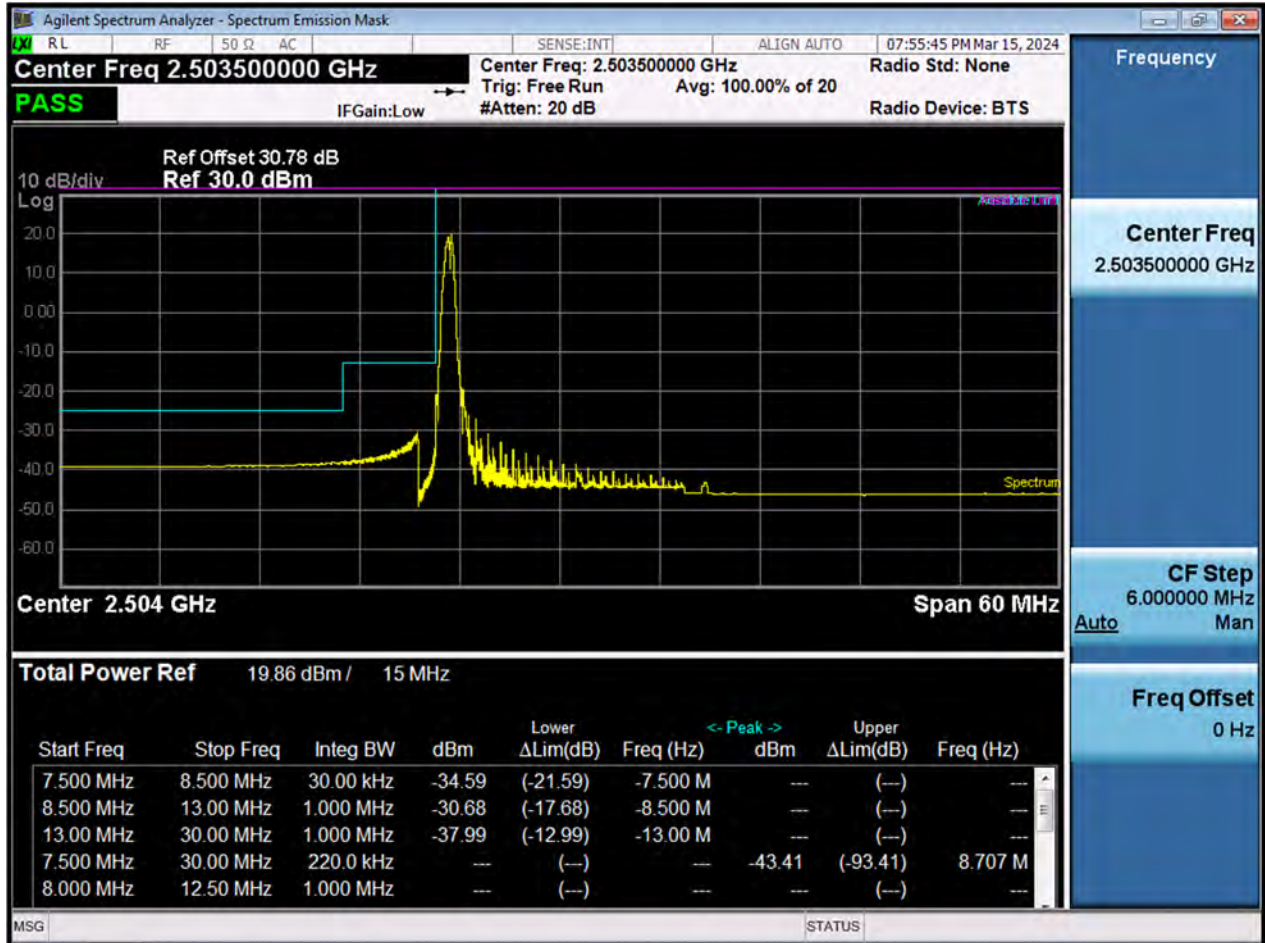

LTE41\_15 M\_BandEdge\_Upper\_Low\_2503.5 MHz\_QPSK\_1RB

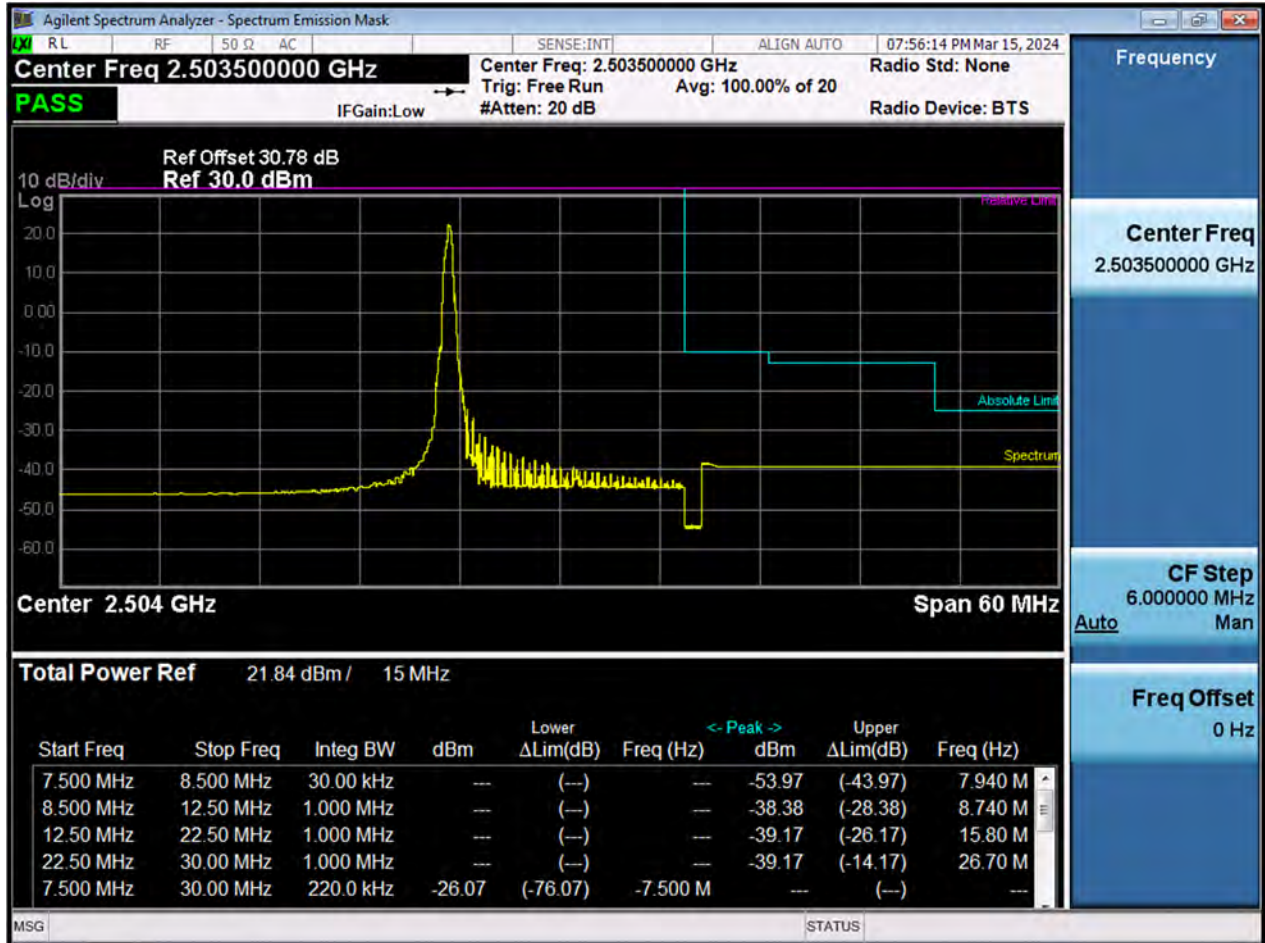


LTE41\_15 M\_BandEdge\_Mid\_2593 MHz\_QPSK\_FullRB

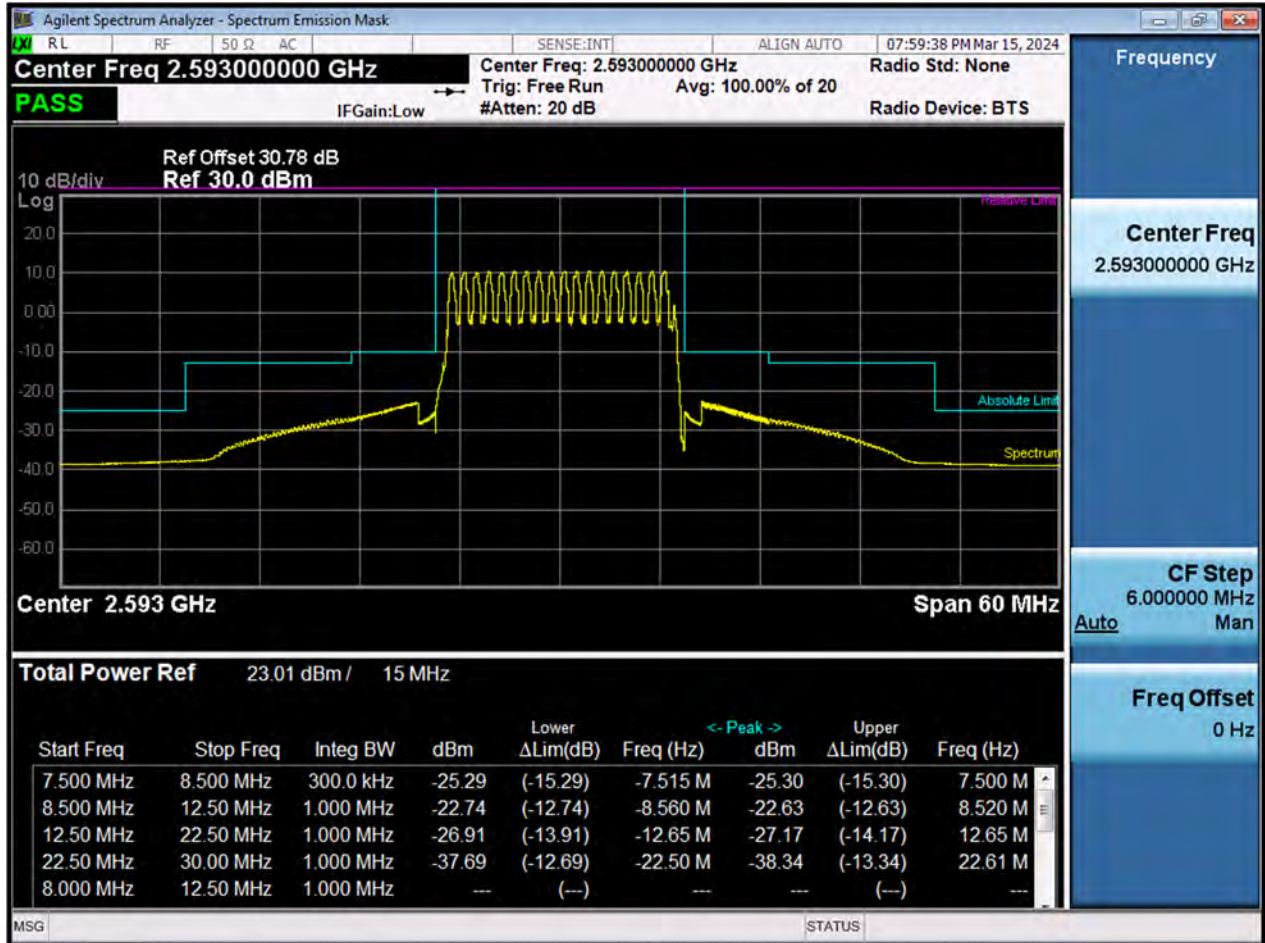




LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_FullRB

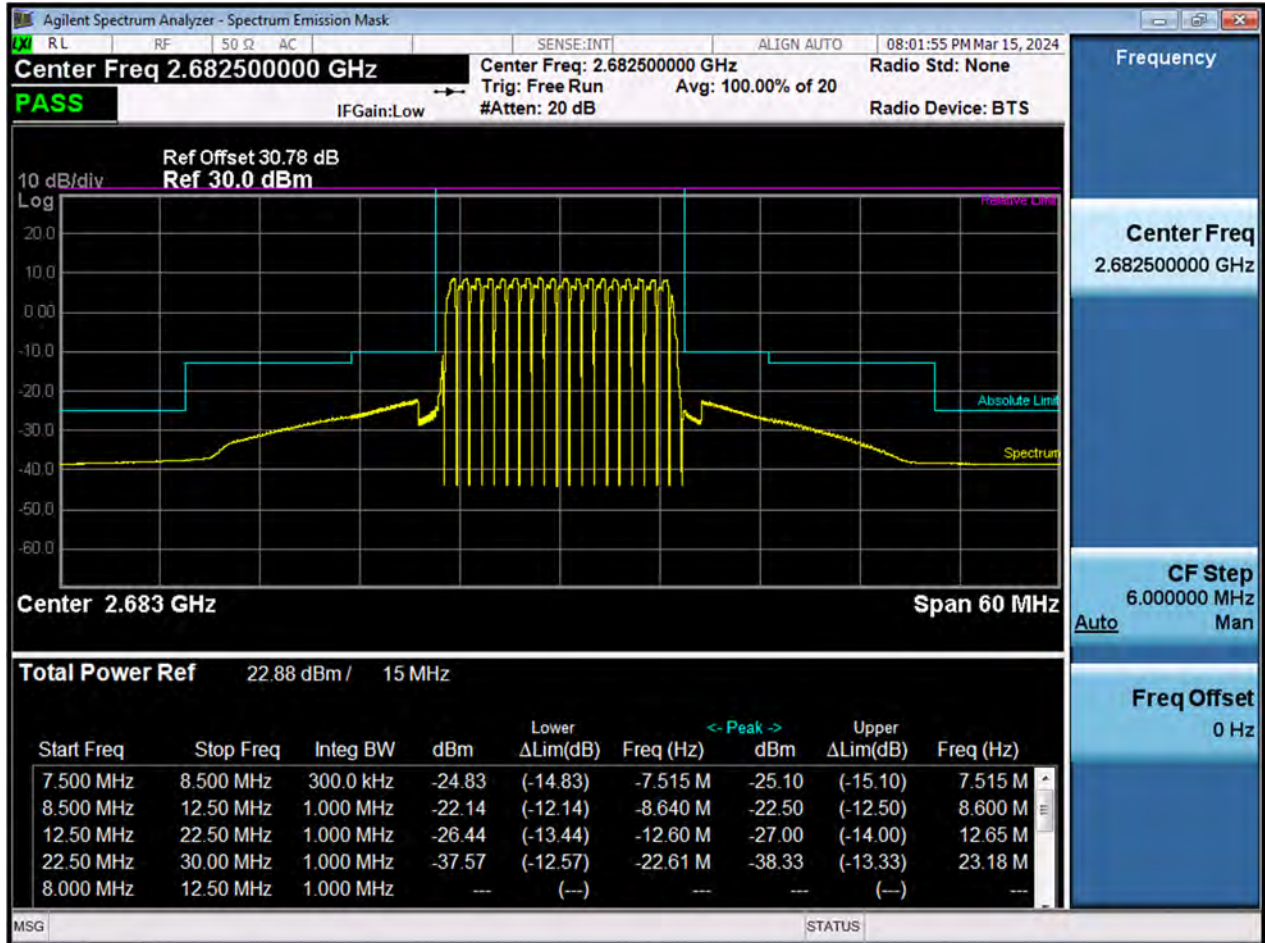


LTE41\_15 M\_BandEdge\_High\_2682.5 MHz\_QPSK\_1RB

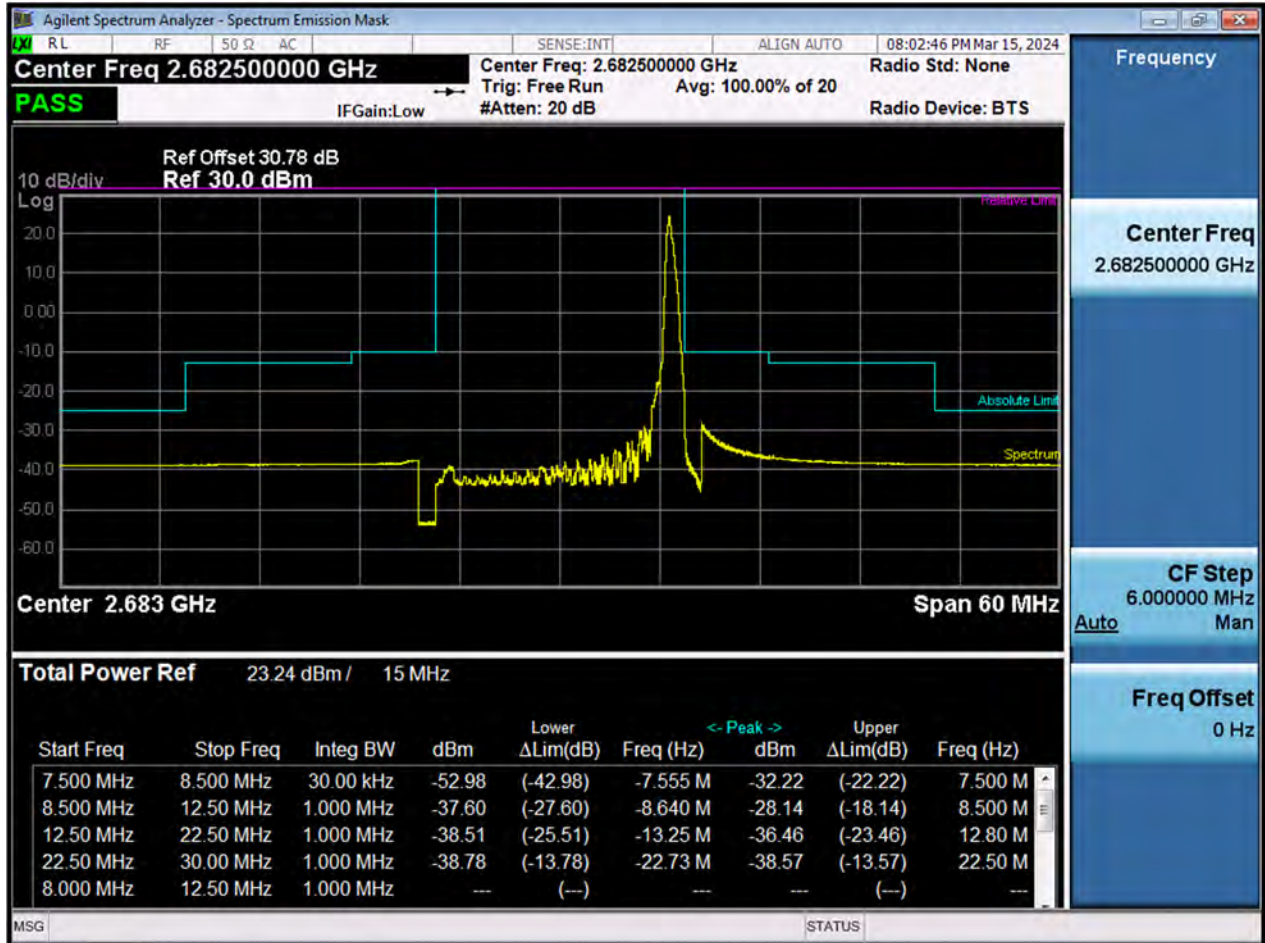



LTE41\_20 M\_BandEdge\_Lower\_Low\_2506 MHz\_QPSK\_FullRB

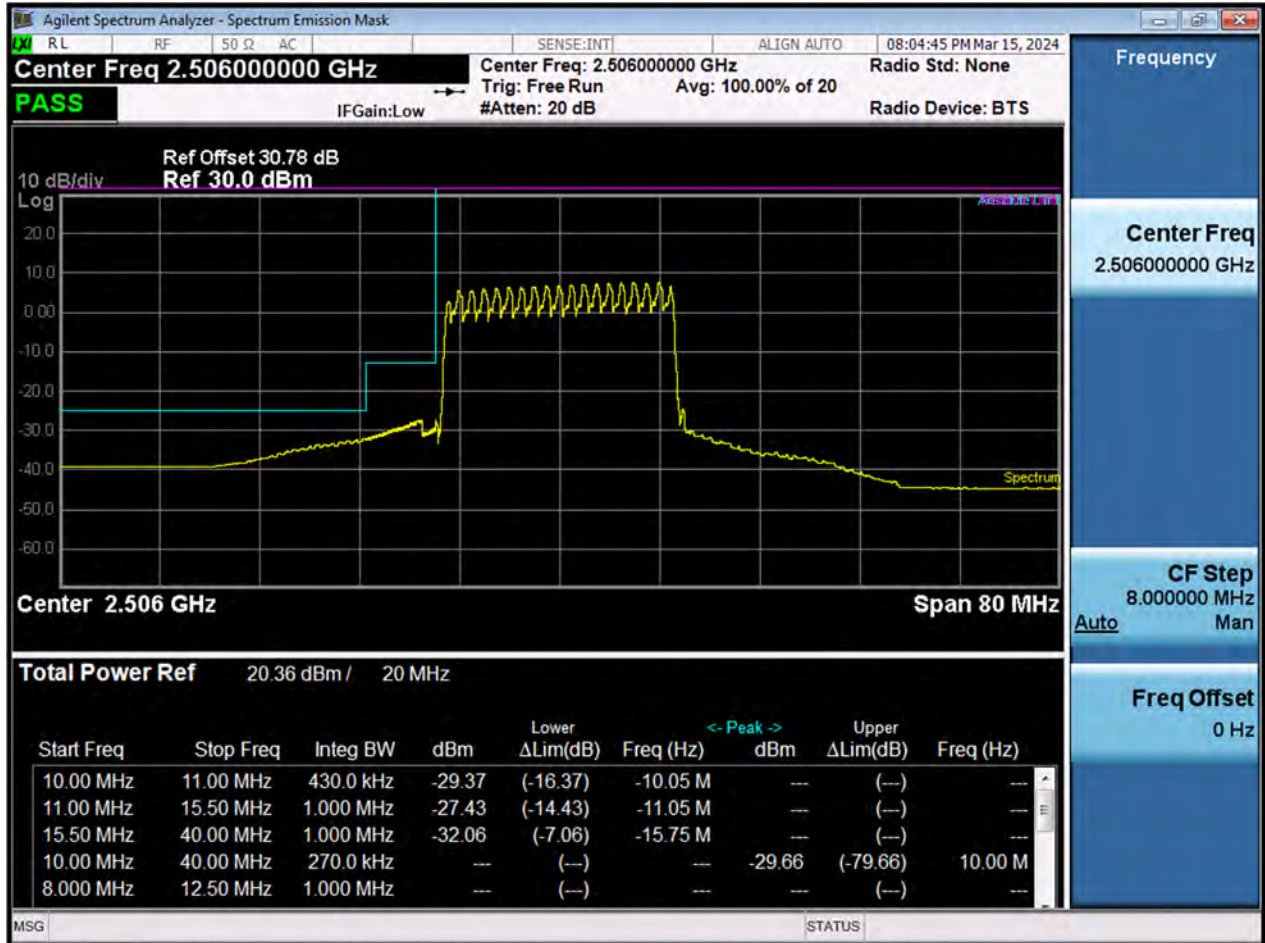

LTE41\_20 M\_BandEdge\_Upper\_Low\_2506 MHz\_QPSK\_FullRB



LTE41\_20 M\_BandEdge\_Lower\_Low\_2506 MHz\_QPSK\_1RB

