

# TEST REPORT

FCC Sub6 n41 Test for SM-F741B  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2405-FC015

**DATE OF ISSUE**  
May 3, 2024

**Tested by**  
Jae Ryang Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

<b>TEST REPORT</b>	<b>REPORT NO.</b> HCT-RF-2405-FC015
	<b>DATE OF ISSUE</b> May 03, 2024
	<b>Additional Model</b> -

<b>Applicant</b>	<b>SAMSUNG Electronics Co., Ltd.</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>Product Name</b>	Mobile Phone
<b>Model Name</b>	SM-F741B
<b>Date of Test</b>	March 11, 2024 ~ April 26, 2024
<b>FCC ID</b>	A3LSMF741B
<b>Location of Test</b>	<input checked="" type="checkbox"/> Permanent Testing Lab <input type="checkbox"/> On Site Testing (Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 03, 2024	Initial Release

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER .....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 CHANNEL EDGE.....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
3.9 WORST CASE(RADIATED TEST).....	18
3.10 WORST CASE(CONDUCTED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	21
5. MEASUREMENT UNCERTAINTY .....	22
6. SUMMARY OF TEST RESULTS.....	23
7. SAMPLE CALCULATION .....	24
8. TEST DATA.....	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	26
9.2 RADIATED SPURIOUS EMISSIONS .....	38
9.3 PEAK-TO-AVERAGE RATIO.....	50
9.4 OCCUPIED BANDWIDTH .....	52
9.5 CONDUCTED SPURIOUS EMISSIONS.....	54
9.6 CHANNEL EDGE.....	56
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	59
10. TEST PLOTS.....	71
11. ANNEX A_ TEST SETUP PHOTO .....	348

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741B
<b>Additional Model(s)</b>	-
<b>SCS(kHz):</b>	30
<b>Bandwidth(MHz):</b>	5, 10, 15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100
<b>Waveform:</b>	CP-OFDM, DFT-S-OFDM
<b>Modulation:</b>	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
<b>Tx Frequency:</b>	2501.010 – 2685.000 : 10 MHz(Sub6 n41) 2503.500 – 2682.480 : 15 MHz(Sub6 n41) 2506.020 – 2679.990 : 20 MHz(Sub6 n41) 2508.510 – 2677.500 : 25 MHz(Sub6 n41) 2511.000 – 2674.980 : 30 MHz(Sub6 n41) 2516.010 – 2670.000 : 40 MHz(Sub6 n41) 2521.020 – 2664.990 : 50 MHz(Sub6 n41) 2526.000 – 2659.980 : 60 MHz(Sub6 n41) 2531.010 – 2655.000 : 70 MHz(Sub6 n41) 2536.020 – 2649.990 : 80 MHz(Sub6 n41) 2541.000 – 2644.980 : 90 MHz(Sub6 n41) 2546.010 – 2640.000 : 100 MHz(Sub6 n41)
<b>Date(s) of Tests:</b>	March 11, 2024 ~ April 26, 2024
<b>Serial number:</b>	Radiated : R3CX20CZ00N Conducted : R3CX205LS3K

## 1.1. MAXIMUM OUTPUT POWER

	Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
					Max. Power (W)	Max. Power (dBm)
Power Class 3	Sub6 n41 (10)	2501.010 – 2685.000	8M66G7D	PI/2 BPSK	0.208	23.19
			8M71G7D	QPSK	0.206	23.14
			8M68W7D	16QAM	0.155	21.91
			8M70W7D	64QAM	0.115	20.62
			8M60W7D	256QAM	0.067	18.24
	Sub6 n41 (15)	2503.500 – 2682.480	13M0G7D	PI/2 BPSK	0.207	23.16
			13M0G7D	QPSK	0.205	23.11
			13M0W7D	16QAM	0.161	22.07
			13M0W7D	64QAM	0.115	20.61
			13M0W7D	256QAM	0.069	18.41
	Sub6 n41 (20)	2506.020 – 2679.990	18M0G7D	PI/2 BPSK	0.202	23.06
			18M0G7D	QPSK	0.199	22.99
			18M0W7D	16QAM	0.157	21.97
			18M0W7D	64QAM	0.111	20.44
			17M9W7D	256QAM	0.065	18.13
	Sub6 n41 (25)	2508.510 – 2677.500	23M0G7D	PI/2 BPSK	0.216	23.34
			23M0G7D	QPSK	0.213	23.28
			23M0W7D	16QAM	0.162	22.09
			23M1W7D	64QAM	0.120	20.79
			23M0W7D	256QAM	0.071	18.52
	Sub6 n41 (30)	2511.000 – 2674.980	27M0G7D	PI/2 BPSK	0.220	23.43
			26M9G7D	QPSK	0.213	23.28
			26M9W7D	16QAM	0.166	22.21
			27M0W7D	64QAM	0.121	20.81
			27M0W7D	256QAM	0.072	18.55
	Sub6 n41 (40)	2516.010 – 2670.000	35M9G7D	PI/2 BPSK	0.213	23.29
			35M9G7D	QPSK	0.208	23.18
			36M0W7D	16QAM	0.169	22.29
			35M8W7D	64QAM	0.118	20.72
			36M0W7D	256QAM	0.070	18.48
	Sub6 n41 (50)	2521.020 – 2664.990	45M7G7D	PI/2 BPSK	0.215	23.32
			45M8G7D	QPSK	0.212	23.26
			46M0W7D	16QAM	0.163	22.13
			45M9W7D	64QAM	0.119	20.75
			45M9W7D	256QAM	0.069	18.40
	Sub6 n41 (60)	2526.000 – 2659.980	58M0G7D	PI/2 BPSK	0.199	22.98
			57M9G7D	QPSK	0.195	22.89
			58M0W7D	16QAM	0.151	21.78
			58M0W7D	64QAM	0.109	20.39
			58M0W7D	256QAM	0.067	18.28
Sub6 n41 (70)	2531.010 – 2655.000	64M6G7D	PI/2 BPSK	0.204	23.09	
		64M5G7D	QPSK	0.199	22.99	
		64M5W7D	16QAM	0.157	21.96	
		64M6W7D	64QAM	0.116	20.66	
		64M4W7D	256QAM	0.069	18.36	
Sub6 n41 (80)	2536.020 – 2649.990	77M3G7D	PI/2 BPSK	0.208	23.19	
		77M4G7D	QPSK	0.207	23.15	
		77M2W7D	16QAM	0.160	22.05	
		77M4W7D	64QAM	0.117	20.68	
		77M1W7D	256QAM	0.069	18.41	
Sub6 n41 (90)	2541.000 – 2644.980	86M8G7D	PI/2 BPSK	0.221	23.44	
		87M1G7D	QPSK	0.214	23.31	
		87M0W7D	16QAM	0.172	22.35	
		87M3W7D	64QAM	0.120	20.79	
		86M7W7D	256QAM	0.074	18.69	
Sub6 n41 (100)	2546.010 – 2640.000	96M6G7D	PI/2 BPSK	0.228	23.57	
		96M6G7D	QPSK	0.220	23.42	
		96M5W7D	16QAM	0.173	22.37	
		96M7W7D	64QAM	0.129	21.11	
		96M5W7D	256QAM	0.074	18.72	

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

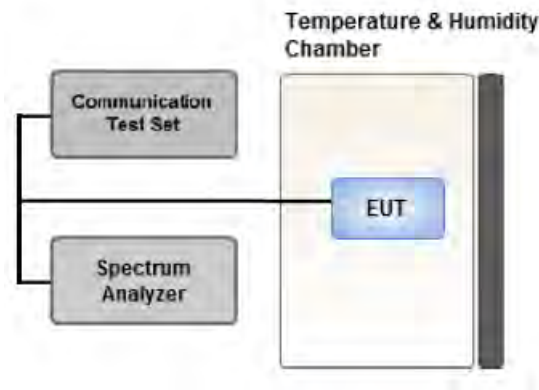

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

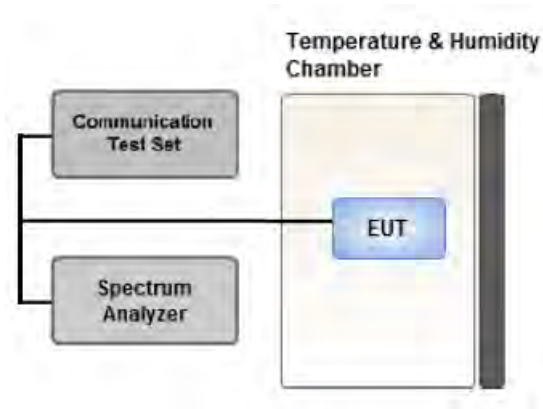

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 - 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 - 7 were repeated after changing the RBW such that it would be within 1 - 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

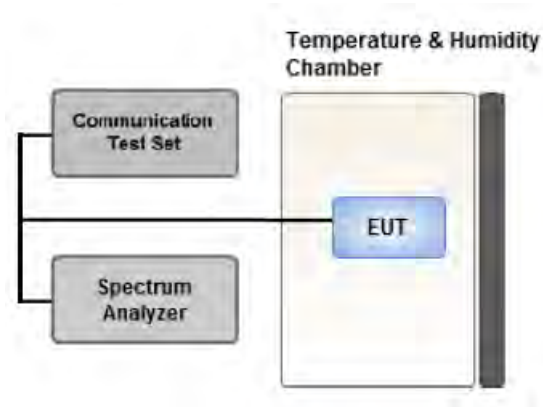

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

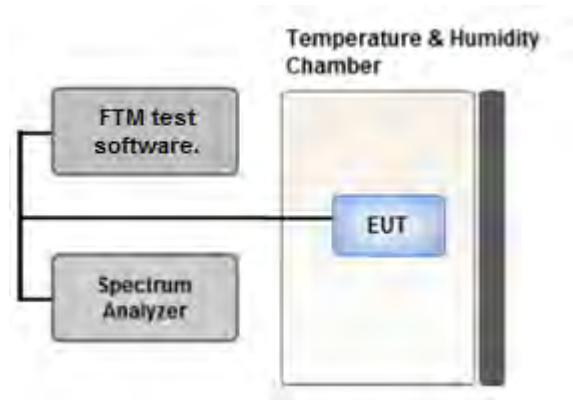

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum power and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2 % of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


**Test Notes**

1. The attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,
2.  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge.
3.  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge.
4. The attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz.
5.  $55 + 10 \log (P)$  dB at or below 2490.5 MHz.
6. X is the greater of 6MHz or the actual emission bandwidth
7. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz}/ \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

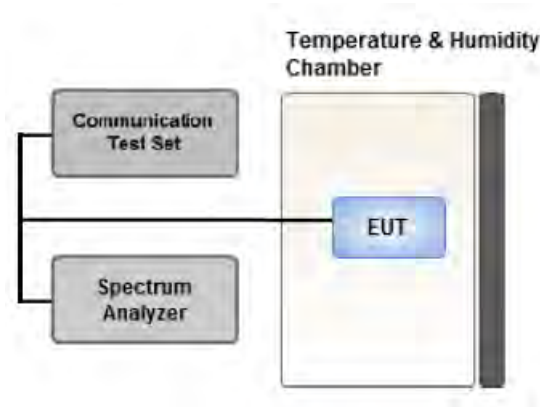

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported. (Worst case: Open mode)
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode: PC3 Only (SA, NSA)  
Worst case: SA  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
Worst case : Stand alone
- We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
- All power classes were tested, and the results were reported for the worst case PC3. (PC3 Only)
- Radiated Spurious emissions are measured while operating in EN-DC mode with Sub 6 NR carrier as well as an LTE carrier (anchor).  
All EN-DC mode of operation (=anchor) were investigated and the test results were measured No Peak Found.  
The test results which are attenuated more than 20 dB below the permissible value, so it was not reported.
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.
- Please refer to the table below.

[ Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		X

### 3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: PC3 Only (SA, NSA)

Worst case: SA

- All power classes were tested, and the results were reported for the worst case PC3. (PC3 Only)

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Mid	Full RB	0
Channel Edge	PI/2 BPSK	10	Low	1	0
			High	1	23
		15	Low	1	0
			High	1	37
		20	Low	1	0
			High	1	50
		25	Low	1	0
			High	1	64
		30	Low	1	0
			High	1	77
		40	Low	1	0
			High	1	105
		50	Low	1	0
			High	1	132
		60	Low	1	0
			High	1	161
		70	Low	1	0
			High	1	188
		80	Low	1	0
			High	1	216
		90	Low	1	0
			High	1	244
		100	Low	1	0
			High	1	272
		10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Low, Mid High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	10, 15, 20, 25, 30, 40, 50, 60, 80, 90, 100	Low, Mid, High	1	1

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/10/2026	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	02/14/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	04/27/2025	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	01/16/2025	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
RF Switching System	FBSR-06B (1G HPF + LNA)	T&M SYSTEM	F3L1	05/22/2024	Annual
RF Switching System	FBSR-06B (3G HPF + LNA)	T&M SYSTEM	F3L2	05/22/2024	Annual
RF Switching System	FBSR-06B (6G HPF + LNA)	T&M SYSTEM	F3L3	05/22/2024	Annual
RF Switching System	FBSR-06B (LNA)	T&M SYSTEM	F3L4	05/22/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	08/25/2024	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/29/2025	Annual
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/04/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/13/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/22/2024	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/23/2024	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/19/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(m)(4)	<ul style="list-style-type: none"> <li>■ <math>&lt; 40 + 10\log_{10}(P[\text{Watts}])</math> at Channel edges</li> <li>■ <math>&lt; 43 + 10\log_{10}(P[\text{Watts}])</math> between 5 and X MHz from Channel edges</li> <li>■ <math>&lt; 55 + 10\log_{10}(P[\text{Watts}])</math> beyond X MHz beyond from Channel edges</li> <li>■ <math>&lt; 43 + 10 \log(P)</math> dB on all frequencies between 2490.5 MHz and 2496 MHz</li> </ul>	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(h)(2)	$< 2$ Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(m)(4)	$< 55 + 10\log_{10}(P[\text{Watts}])$	PASS

**Note:**

1. Radiated tests were tested using 5G Wireless Tester.

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.



### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2501.010	Sub6 n41 / 10 MHz [30 kHz]	PI/2 BPSK	-22.61	14.03	10.30	2.47	H	< 2.00	0.153	21.86	1	1
		QPSK	-22.71	13.93	10.30	2.47	H		0.150	21.76		
		16-QAM	-23.82	12.82	10.30	2.47	H		0.116	20.65		
		64-QAM	-25.16	11.48	10.30	2.47	H		0.085	19.31		
		256-QAM	-27.35	9.29	10.30	2.47	H		0.052	17.12		
2592.990		PI/2 BPSK	-20.66	15.64	10.05	2.50	H		0.208	23.19	1	1
		QPSK	-20.71	15.59	10.05	2.50	H		0.206	23.14		
		16-QAM	-21.94	14.36	10.05	2.50	H		0.155	21.91		
		64-QAM	-23.23	13.07	10.05	2.50	H		0.115	20.62		
		256-QAM	-25.61	10.69	10.05	2.50	H		0.067	18.24		
2685.000	PI/2 BPSK	-24.53	12.93	10.10	2.58	H	0.111	20.45	1	12		
	QPSK	-24.63	12.83	10.10	2.58	H	0.108	20.35				
	16-QAM	-25.78	11.68	10.10	2.58	H	0.083	19.20				
	64-QAM	-27.20	10.26	10.10	2.58	H	0.060	17.78				
	256-QAM	-29.56	7.90	10.10	2.58	H	0.035	15.42				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2503.500		PI/2 BPSK	-22.69	13.94	10.30	2.48	H	< 2.00	0.150	21.76	1	1
		QPSK	-22.76	13.87	10.30	2.48	H		0.148	21.69		
		16-QAM	-23.74	12.89	10.30	2.48	H		0.118	20.71		
		64-QAM	-25.09	11.54	10.30	2.48	H		0.086	19.36		
		256-QAM	-27.49	9.14	10.30	2.48	H		0.050	16.96		
2592.990	Sub6 n41 / 15 MHz [30 kHz]	PI/2 BPSK	-20.69	15.61	10.05	2.50	H	< 2.00	0.207	23.16	1	1
		QPSK	-20.74	15.56	10.05	2.50	H		0.205	23.11		
		16-QAM	-21.78	14.52	10.05	2.50	H		0.161	22.07		
		64-QAM	-23.24	13.06	10.05	2.50	H		0.115	20.61		
		256-QAM	-25.44	10.86	10.05	2.50	H		0.069	18.41		
2682.480		PI/2 BPSK	-24.33	13.38	10.10	2.58	H	< 2.00	0.123	20.90	1	1
		QPSK	-24.45	13.26	10.10	2.58	H		0.120	20.78		
		16-QAM	-25.56	12.15	10.10	2.58	H		0.093	19.67		
		64-QAM	-26.93	10.78	10.10	2.58	H		0.068	18.30		
		256-QAM	-29.10	8.61	10.10	2.58	H		0.041	16.13		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2506.020		PI/2 BPSK	-22.55	14.08	10.30	2.48	H	< 2.00	0.155	21.90	1	49
		QPSK	-22.66	13.97	10.30	2.48	H		0.151	21.79		
		16-QAM	-23.71	12.92	10.30	2.48	H		0.119	20.74		
		64-QAM	-25.13	11.50	10.30	2.48	H		0.086	19.32		
		256-QAM	-27.30	9.33	10.30	2.48	H		0.052	17.15		
2592.990	Sub6 n41 / 20 MHz [30 kHz]	PI/2 BPSK	-20.79	15.51	10.05	2.50	H	< 2.00	0.202	23.06	1	1
		QPSK	-20.86	15.44	10.05	2.50	H		0.199	22.99		
		16-QAM	-21.88	14.42	10.05	2.50	H		0.157	21.97		
		64-QAM	-23.41	12.89	10.05	2.50	H		0.111	20.44		
		256-QAM	-25.72	10.58	10.05	2.50	H		0.065	18.13		
2679.990		PI/2 BPSK	-24.34	13.37	10.10	2.58	H	< 2.00	0.123	20.89	1	1
		QPSK	-24.48	13.23	10.10	2.58	H		0.119	20.75		
		16-QAM	-25.57	12.14	10.10	2.58	H		0.092	19.66		
		64-QAM	-26.84	10.87	10.10	2.58	H		0.069	18.39		
		256-QAM	-29.05	8.66	10.10	2.58	H		0.041	16.18		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2508.510		PI/2 BPSK	-22.00	14.63	10.30	2.49	H	< 2.00	0.175	22.44	1	63
		QPSK	-22.07	14.56	10.30	2.49	H		0.173	22.37		
		16-QAM	-22.95	13.68	10.30	2.49	H		0.141	21.49		
		64-QAM	-24.51	12.12	10.30	2.49	H		0.098	19.93		
		256-QAM	-26.72	9.91	10.30	2.49	H		0.059	17.72		
2592.990	Sub6 n41 / 25 MHz [30 kHz]	PI/2 BPSK	-20.51	15.79	10.05	2.50	H	< 2.00	0.216	23.34	1	1
		QPSK	-20.57	15.73	10.05	2.50	H		0.213	23.28		
		16-QAM	-21.76	14.54	10.05	2.50	H		0.162	22.09		
		64-QAM	-23.06	13.24	10.05	2.50	H		0.120	20.79		
		256-QAM	-25.33	10.97	10.05	2.50	H		0.071	18.52		
2677.500		PI/2 BPSK	-23.69	13.87	10.10	2.58	H	< 2.00	0.138	21.39	1	1
		QPSK	-23.76	13.80	10.10	2.58	H		0.136	21.32		
		16-QAM	-25.01	12.55	10.10	2.58	H		0.102	20.07		
		64-QAM	-26.44	11.12	10.10	2.58	H		0.073	18.64		
		256-QAM	-28.73	8.83	10.10	2.58	H		0.043	16.35		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2511.000		PI/2 BPSK	-21.61	15.01	10.30	2.50	H	< 2.00	0.191	22.81	1	76
		QPSK	-21.64	14.98	10.30	2.50	H		0.190	22.78		
		16-QAM	-22.57	14.05	10.30	2.50	H		0.153	21.85		
		64-QAM	-24.04	12.58	10.30	2.50	H		0.109	20.38		
		256-QAM	-26.39	10.23	10.30	2.50	H		0.064	18.03		
2592.990	Sub6 n41 / 30 MHz [30 kHz]	PI/2 BPSK	-20.42	15.88	10.05	2.50	H	< 2.00	0.220	23.43	1	1
		QPSK	-20.57	15.73	10.05	2.50	H		0.213	23.28		
		16-QAM	-21.64	14.66	10.05	2.50	H		0.166	22.21		
		64-QAM	-23.04	13.26	10.05	2.50	H		0.121	20.81		
		256-QAM	-25.30	11.00	10.05	2.50	H		0.072	18.55		
2674.980		PI/2 BPSK	-23.53	13.88	10.10	2.58	H	< 2.00	0.138	21.40	1	1
		QPSK	-23.76	13.65	10.10	2.58	H		0.131	21.17		
		16-QAM	-24.59	12.82	10.10	2.58	H		0.108	20.34		
		64-QAM	-26.16	11.25	10.10	2.58	H		0.075	18.77		
		256-QAM	-28.33	9.08	10.10	2.58	H		0.046	16.60		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2516.010		PI/2 BPSK	-20.99	15.50	10.30	2.51	H	< 2.00	0.213	23.29	1	104
		QPSK	-21.10	15.39	10.30	2.51	H		0.208	23.18		
		16-QAM	-21.99	14.50	10.30	2.51	H		0.169	22.29		
		64-QAM	-23.56	12.93	10.30	2.51	H		0.118	20.72		
		256-QAM	-25.80	10.69	10.30	2.51	H		0.070	18.48		
2592.990	Sub6 n41 / 40 MHz [30 kHz]	PI/2 BPSK	-21.06	15.24	10.05	2.50	H	< 2.00	0.190	22.79	1	1
		QPSK	-21.12	15.18	10.05	2.50	H		0.187	22.73		
		16-QAM	-22.07	14.23	10.05	2.50	H		0.151	21.78		
		64-QAM	-23.55	12.75	10.05	2.50	H		0.107	20.30		
		256-QAM	-25.75	10.55	10.05	2.50	H		0.065	18.10		
2670.000		PI/2 BPSK	-23.14	13.98	10.10	2.58	H	< 2.00	0.141	21.50	1	1
		QPSK	-23.23	13.89	10.10	2.58	H		0.138	21.41		
		16-QAM	-24.43	12.69	10.10	2.58	H		0.105	20.21		
		64-QAM	-25.64	11.48	10.10	2.58	H		0.079	19.00		
		256-QAM	-27.79	9.33	10.10	2.58	H		0.048	16.85		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2521.020		PI/2 BPSK	-20.82	15.85	10.00	2.53	H	< 2.00	0.215	23.32	1	131
		QPSK	-20.88	15.79	10.00	2.53	H		0.212	23.26		
		16-QAM	-22.01	14.66	10.00	2.53	H		0.163	22.13		
		64-QAM	-23.39	13.28	10.00	2.53	H		0.119	20.75		
		256-QAM	-25.74	10.93	10.00	2.53	H		0.069	18.40		
2592.990	Sub6 n41 / 50 MHz [30 kHz]	PI/2 BPSK	-20.87	15.43	10.05	2.50	H	< 2.00	0.199	22.98	1	1
		QPSK	-20.94	15.36	10.05	2.50	H		0.195	22.91		
		16-QAM	-22.00	14.30	10.05	2.50	H		0.153	21.85		
		64-QAM	-23.61	12.69	10.05	2.50	H		0.106	20.24		
		256-QAM	-25.71	10.59	10.05	2.50	H		0.065	18.14		
2664.990		PI/2 BPSK	-22.81	14.28	10.10	2.60	H	< 2.00	0.151	21.78	1	1
		QPSK	-22.87	14.22	10.10	2.60	H		0.149	21.72		
		16-QAM	-23.83	13.26	10.10	2.60	H		0.119	20.76		
		64-QAM	-25.43	11.66	10.10	2.60	H		0.082	19.16		
		256-QAM	-27.60	9.49	10.10	2.60	H		0.050	16.99		



Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2526.000		PI/2 BPSK	-21.31	14.95	10.30	2.53	H	< 2.00	0.187	22.72	1	160
		QPSK	-21.37	14.89	10.30	2.53	H		0.185	22.66		
		16-QAM	-22.51	13.75	10.30	2.53	H		0.142	21.52		
		64-QAM	-23.97	12.29	10.30	2.53	H		0.101	20.06		
		256-QAM	-26.00	10.26	10.30	2.53	H		0.064	18.03		
2592.990	Sub6 41/ 60 MHz [30 kHz]	PI/2 BPSK	-20.87	15.43	10.05	2.50	H	< 2.00	0.199	22.98	1	1
		QPSK	-20.96	15.34	10.05	2.50	H		0.195	22.89		
		16-QAM	-22.07	14.23	10.05	2.50	H		0.151	21.78		
		64-QAM	-23.46	12.84	10.05	2.50	H		0.109	20.39		
		256-QAM	-25.57	10.73	10.05	2.50	H		0.067	18.28		
2659.980		PI/2 BPSK	-22.60	14.25	10.10	2.61	H	< 2.00	0.149	21.74	1	1
		QPSK	-22.74	14.11	10.10	2.61	H		0.145	21.60		
		16-QAM	-23.65	13.20	10.10	2.61	H		0.117	20.69		
		64-QAM	-25.14	11.71	10.10	2.61	H		0.083	19.20		
		256-QAM	-27.27	9.58	10.10	2.61	H		0.051	17.07		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit W	EIRP		RB	
									W	dBm	Size	Offset
2531.010		PI/2 BPSK	-20.81	15.31	10.30	2.52	H	< 2.00	0.204	23.09	1	187
		QPSK	-20.91	15.21	10.30	2.52	H		0.199	22.99		
		16-QAM	-21.94	14.18	10.30	2.52	H		0.157	21.96		
		64-QAM	-23.24	12.88	10.30	2.52	H		0.116	20.66		
		256-QAM	-25.54	10.58	10.30	2.52	H		0.069	18.36		
2592.990	Sub6 41/ 70 MHz [30 kHz]	PI/2 BPSK	-21.18	15.12	10.05	2.50	H	< 2.00	0.185	22.67	1	1
		QPSK	-21.24	15.06	10.05	2.50	H		0.182	22.61		
		16-QAM	-22.21	14.09	10.05	2.50	H		0.146	21.64		
		64-QAM	-23.71	12.59	10.05	2.50	H		0.103	20.14		
		256-QAM	-26.01	10.29	10.05	2.50	H		0.061	17.84		
2655.000		PI/2 BPSK	-21.77	14.99	10.10	2.63	H	< 2.00	0.176	22.46	1	1
		QPSK	-21.84	14.92	10.10	2.63	H		0.173	22.39		
		16-QAM	-22.83	13.93	10.10	2.63	H		0.138	21.40		
		64-QAM	-24.17	12.59	10.10	2.63	H		0.101	20.06		
		256-QAM	-26.49	10.27	10.10	2.63	H		0.059	17.74		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2536.020		PI/2 BPSK	-20.83	15.41	10.30	2.52	H	< 2.00	0.208	23.19	1	215
		QPSK	-20.87	15.37	10.30	2.52	H		0.207	23.15		
		16-QAM	-21.97	14.27	10.30	2.52	H		0.160	22.05		
		64-QAM	-23.34	12.90	10.30	2.52	H		0.117	20.68		
		256-QAM	-25.61	10.63	10.30	2.52	H		0.069	18.41		
2592.990	Sub6 41/ 80 MHz [30 kHz]	PI/2 BPSK	-21.01	15.29	10.05	2.50	H	< 2.00	0.192	22.84	1	1
		QPSK	-21.36	14.94	10.05	2.50	H		0.177	22.49		
		16-QAM	-22.26	14.04	10.05	2.50	H		0.144	21.59		
		64-QAM	-23.81	12.49	10.05	2.50	H		0.101	20.04		
		256-QAM	-25.91	10.39	10.05	2.50	H		0.062	17.94		
2649.990		PI/2 BPSK	-21.23	15.44	10.10	2.65	H	< 2.00	0.195	22.89	1	1
		QPSK	-21.33	15.34	10.10	2.65	H		0.190	22.79		
		16-QAM	-22.59	14.08	10.10	2.65	H		0.142	21.53		
		64-QAM	-23.82	12.85	10.10	2.65	H		0.107	20.30		
		256-QAM	-26.06	10.61	10.10	2.65	H		0.064	18.06		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2541.000		PI/2 BPSK	-20.78	15.58	10.30	2.52	H		0.217	23.36	1	243
		QPSK	-20.83	15.53	10.30	2.52	H		0.214	23.31		
		16-QAM	-21.79	14.57	10.30	2.52	H		0.172	22.35		
		64-QAM	-23.37	12.99	10.30	2.52	H		0.119	20.77		
		256-QAM	-25.57	10.79	10.30	2.52	H		0.072	18.57		
2592.990	Sub6 41/ 90 MHz [30 kHz]	PI/2 BPSK	-20.66	15.64	10.05	2.50	H	< 2.00	0.208	23.19	1	1
		QPSK	-20.74	15.56	10.05	2.50	H		0.205	23.11		
		16-QAM	-21.86	14.44	10.05	2.50	H		0.158	21.99		
		64-QAM	-23.32	12.98	10.05	2.50	H		0.113	20.53		
		256-QAM	-25.39	10.91	10.05	2.50	H		0.070	18.46		
2644.980		PI/2 BPSK	-20.71	16.10	10.00	2.66	H		0.221	23.44	1	1
		QPSK	-20.91	15.90	10.00	2.66	H		0.211	23.24		
		16-QAM	-21.87	14.94	10.00	2.66	H		0.169	22.28		
		64-QAM	-23.36	13.45	10.00	2.66	H		0.120	20.79		
		256-QAM	-25.46	11.35	10.00	2.66	H		0.074	18.69		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
2546.010		PI/2 BPSK	-20.66	15.71	10.25	2.54	H	< 2.00	0.220	23.42	1	271
		QPSK	-20.84	15.53	10.25	2.54	H		0.211	23.24		
		16-QAM	-21.80	14.57	10.25	2.54	H		0.169	22.28		
		64-QAM	-23.36	13.01	10.25	2.54	H		0.118	20.72		
		256-QAM	-25.36	11.01	10.25	2.54	H		0.074	18.72		
2592.990	Sub6 41/ 100 MHz [30 kHz]	PI/2 BPSK	-20.79	15.51	10.05	2.50	H	< 2.00	0.202	23.06	1	1
		QPSK	-20.81	15.49	10.05	2.50	H		0.201	23.04		
		16-QAM	-21.94	14.36	10.05	2.50	H		0.155	21.91		
		64-QAM	-23.46	12.84	10.05	2.50	H		0.109	20.39		
		256-QAM	-25.51	10.79	10.05	2.50	H		0.068	18.34		
2640.000		PI/2 BPSK	-20.61	16.34	9.90	2.67	H	< 2.00	0.228	23.57	1	1
		QPSK	-20.76	16.19	9.90	2.67	H		0.220	23.42		
		16-QAM	-21.81	15.14	9.90	2.67	H		0.173	22.37		
		64-QAM	-23.07	13.88	9.90	2.67	H		0.129	21.11		
		256-QAM	-25.57	11.38	9.90	2.67	H		0.073	18.61		

## 9.2 RADIATED SPURIOUS EMISSIONS

▪ NR Band:	<u>n41</u>
▪ Bandwidth:	<u>10 MHz</u>
▪ Modulation:	<u>PI/2 BPSK</u>
▪ Distance:	<u>1 meter</u>
▪ SCS:	<u>30 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500202 (2501.010)	5 002.02	-62.70	10.70	-64.05	3.63	V	-56.98	-25.00	1	1
	7 503.03	-64.66	11.10	-57.65	4.50	V	-51.05	-25.00		
	10 004.04	-63.04	11.20	-54.58	5.26	V	-48.64	-25.00		
	12 505.05	-64.45	12.10	-55.11	6.04	V	-49.05	-25.00		
	15 006.06	-59.86	13.80	-53.26	6.65	V	-46.11	-25.00		
518598 (2592.990)	5 185.98	-62.25	11.00	-63.75	3.70	V	-56.45	-25.00	1	1
	7 778.97	-64.23	10.90	-56.85	4.61	V	-50.56	-25.00		
	10 371.96	-63.87	11.20	-53.17	5.41	V	-47.38	-25.00		
	12 964.95	-64.02	12.00	-54.09	6.11	V	-48.20	-25.00		
	15 557.94	-61.89	15.40	-56.56	6.77	V	-47.93	-25.00		
537000 (2685.000)	5 370.00	-62.80	11.50	-65.32	3.74	V	-57.56	-25.00	1	12
	8 055.00	-63.52	10.90	-56.31	4.71	V	-50.12	-25.00		
	10 740.00	-65.65	11.10	-55.05	5.50	V	-49.45	-25.00		
	13 425.00	-63.54	11.80	-52.69	6.22	V	-47.11	-25.00		
	16 110.00	-65.03	15.70	-55.89	6.91	V	-47.10	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 15 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
500700 (2503.500)	5 007.00	-62.42	10.70	-63.70	3.61	V	-56.61	-25.00	1	1
	7 510.50	-63.99	11.10	-56.92	4.50	V	-50.32	-25.00		
	10 014.00	-63.72	11.20	-55.11	5.27	V	-49.18	-25.00		
	12 517.50	-63.56	12.10	-53.93	6.04	V	-47.87	-25.00		
	15 021.00	-59.49	13.80	-53.01	6.65	V	-45.86	-25.00		
518598 (2592.990)	5 185.98	-61.46	11.00	-62.96	3.70	V	-55.66	-25.00	1	1
	7 778.97	-63.84	10.90	-56.46	4.61	V	-50.17	-25.00		
	10 371.96	-62.69	11.20	-51.99	5.41	V	-46.20	-25.00		
	12 964.95	-62.93	12.00	-53.00	6.11	V	-47.11	-25.00		
	15 557.94	-59.49	15.40	-54.16	6.77	V	-45.53	-25.00		
536496 (2682.480)	5 364.96	-63.73	11.50	-66.02	3.75	V	-58.27	-25.00	1	1
	8 047.44	-62.49	10.85	-55.31	4.69	V	-49.15	-25.00		
	10 729.92	-65.48	11.10	-54.25	5.47	V	-48.62	-25.00		
	13 412.40	-62.99	11.80	-52.32	6.21	V	-46.73	-25.00		
	16 094.88	-64.88	15.60	-55.42	6.91	V	-46.73	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 20 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
501204 (2506.020)	5 012.04	-61.92	10.70	-63.13	3.59	V	-56.02	-25.00	1	49
	7 518.06	-65.89	11.10	-58.78	4.51	V	-52.19	-25.00		
	10 024.08	-63.60	11.20	-54.78	5.27	V	-48.85	-25.00		
	12 530.10	-64.66	12.10	-54.84	6.01	V	-48.75	-25.00		
	15 036.12	-59.15	13.80	-52.91	6.65	V	-45.76	-25.00		
518598 (2592.990)	5 185.98	-63.00	11.00	-64.50	3.70	V	-57.20	-25.00	1	1
	7 778.97	-64.65	10.90	-57.27	4.61	V	-50.98	-25.00		
	10 371.96	-65.53	11.20	-54.83	5.41	V	-49.04	-25.00		
	12 964.95	-65.16	12.00	-55.23	6.11	V	-49.34	-25.00		
	15 557.94	-62.57	15.40	-57.24	6.77	V	-48.61	-25.00		
535998 (2679.990)	5 359.98	-62.74	11.50	-64.80	3.76	V	-57.06	-25.00	1	1
	8 039.97	-63.55	10.80	-56.38	4.68	V	-50.26	-25.00		
	10 719.96	-64.93	11.10	-53.30	5.46	V	-47.66	-25.00		
	13 399.95	-62.84	11.80	-52.49	6.22	V	-46.91	-25.00		
	16 079.94	-64.64	15.50	-55.36	6.90	V	-46.76	-25.00		



- ▣ NR Band: n41
- ▣ Bandwidth: 25 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
501702 (2508.510)	5 017.02	-63.29	10.70	-64.66	3.57	V	-57.53	-25.00	1	63
	7 525.53	-65.37	11.10	-58.06	4.51	V	-51.47	-25.00		
	10 034.04	-64.00	11.20	-55.09	5.27	V	-49.16	-25.00		
	12 542.55	-64.48	12.10	-54.89	6.00	V	-48.79	-25.00		
	15 051.06	-57.63	14.00	-51.57	6.66	V	-44.23	-25.00		
518598 (2592.990)	5 185.98	-62.03	11.00	-63.53	3.70	V	-56.23	-25.00	1	1
	7 778.97	-65.17	10.90	-57.79	4.61	V	-51.50	-25.00		
	10 371.96	-65.21	11.20	-54.51	5.41	V	-48.72	-25.00		
	12 964.95	-64.29	12.00	-54.36	6.11	V	-48.47	-25.00		
	15 557.94	-62.18	15.40	-56.85	6.77	V	-48.22	-25.00		
535500 (2677.500)	5 355.00	-62.75	11.50	-64.61	3.75	V	-56.86	-25.00	1	1
	8 032.50	-63.41	10.80	-56.41	4.65	V	-50.26	-25.00		
	10 710.00	-64.85	11.10	-52.97	5.47	V	-47.34	-25.00		
	13 387.50	-62.71	11.90	-52.49	6.23	V	-46.82	-25.00		
	16 065.00	-64.50	15.50	-55.45	6.90	V	-46.85	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 30 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
502200 (2511.000)	5 022.00	-61.97	10.70	-63.50	3.55	V	-56.35	-25.00	1	76
	7 533.00	-65.04	11.10	-57.56	4.50	V	-50.96	-25.00		
	10 044.00	-64.03	11.15	-55.18	5.27	V	-49.30	-25.00		
	12 555.00	-64.40	12.10	-55.09	6.00	V	-48.99	-25.00		
	15 066.00	-59.11	14.00	-53.50	6.65	V	-46.15	-25.00		
518598 (2592.990)	5 185.98	-63.65	11.00	-65.15	3.70	V	-57.85	-25.00	1	1
	7 778.97	-64.38	10.90	-57.00	4.61	V	-50.71	-25.00		
	10 371.96	-65.16	11.20	-54.46	5.41	V	-48.67	-25.00		
	12 964.95	-63.93	12.00	-54.00	6.11	V	-48.11	-25.00		
	15 557.94	-62.29	15.40	-56.96	6.77	V	-48.33	-25.00		
534996 (2674.980)	5 349.96	-63.85	11.50	-65.50	3.75	V	-57.75	-25.00	1	1
	8 024.94	-62.34	10.80	-55.63	4.62	V	-49.45	-25.00		
	10 699.92	-64.23	11.10	-52.55	5.48	V	-46.93	-25.00		
	13 374.90	-62.98	11.90	-52.92	6.23	V	-47.25	-25.00		
	16 049.88	-65.96	15.50	-57.11	6.90	V	-48.51	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 40 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
503202 (2516.010)	5 032.02	-62.86	10.70	-64.96	3.56	V	-57.82	-25.00	1	104
	7 548.03	-65.12	11.10	-57.78	4.50	V	-51.18	-25.00		
	10 064.04	-64.13	11.10	-55.32	5.28	V	-49.50	-25.00		
	12 580.05	-65.77	12.10	-56.14	6.06	V	-50.10	-25.00		
	15 096.06	-61.41	14.05	-56.08	6.67	V	-48.70	-25.00		
518598 (2592.990)	5 185.98	-63.21	11.00	-64.71	3.70	V	-57.41	-25.00	1	1
	7 778.97	-64.80	10.90	-57.42	4.61	V	-51.13	-25.00		
	10 371.96	-65.50	11.20	-54.80	5.41	V	-49.01	-25.00		
	12 964.95	-64.02	12.00	-54.09	6.11	V	-48.20	-25.00		
	15 557.94	-62.58	15.40	-57.25	6.77	V	-48.62	-25.00		
534000 (2670.000)	5 340.00	-62.75	11.40	-64.45	3.75	V	-56.80	-25.00	1	1
	8 010.00	-63.07	10.80	-56.00	4.62	V	-49.82	-25.00		
	10 680.00	-65.01	11.10	-53.55	5.46	V	-47.91	-25.00		
	13 350.00	-63.62	11.90	-53.57	6.21	V	-47.88	-25.00		
	16 020.00	-65.58	15.20	-57.23	6.68	V	-48.71	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 50 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
504204 (2521.020)	5 042.04	-61.89	10.70	-63.86	3.60	V	-56.76	-25.00	1	131
	7 563.06	-65.75	11.10	-58.93	4.52	V	-52.35	-25.00		
	10 084.08	-63.91	11.10	-54.69	5.30	V	-48.89	-25.00		
	12 605.10	-65.48	12.00	-55.98	6.05	V	-50.03	-25.00		
	15 126.12	-58.55	14.10	-52.59	6.67	V	-45.16	-25.00		
518598 (2592.990)	5 185.98	-63.41	11.00	-64.91	3.70	V	-57.61	-25.00	1	1
	7 778.97	-64.75	10.90	-57.37	4.61	V	-51.08	-25.00		
	10 371.96	-65.09	11.20	-54.39	5.41	V	-48.60	-25.00		
	12 964.95	-64.12	12.00	-54.19	6.11	V	-48.30	-25.00		
	15 557.94	-62.35	15.40	-57.02	6.77	V	-48.39	-25.00		
532998 (2664.990)	5 329.98	-63.39	11.40	-65.36	3.71	V	-57.67	-25.00	1	1
	7 994.97	-63.42	10.75	-56.01	4.66	V	-49.92	-25.00		
	10 659.96	-65.33	11.10	-53.17	5.49	V	-47.56	-25.00		
	13 324.95	-63.69	12.00	-52.98	6.19	V	-47.17	-25.00		
	15 989.94	-65.41	15.10	-57.59	6.88	V	-49.37	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 60 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
505200 (2526.000)	5 052.00	-62.24	10.70	-63.89	3.63	V	-56.82	-25.00	1	160
	7 578.00	-65.29	11.10	-58.50	4.54	V	-51.94	-25.00		
	10 104.00	-63.64	11.10	-54.80	5.29	V	-48.99	-25.00		
	12 630.00	-63.98	12.00	-54.75	6.02	V	-48.77	-25.00		
	15 156.00	-60.11	14.20	-54.62	6.67	V	-47.09	-25.00		
518598 (2592.990)	5 185.98	-62.98	11.00	-64.48	3.70	V	-57.18	-25.00	1	1
	7 778.97	-65.43	10.90	-58.05	4.61	V	-51.76	-25.00		
	10 371.96	-65.50	11.20	-54.80	5.41	V	-49.01	-25.00		
	12 964.95	-64.96	12.00	-55.03	6.11	V	-49.14	-25.00		
	15 557.94	-62.95	15.40	-57.62	6.77	V	-48.99	-25.00		
531996 (2659.980)	5 319.96	-62.30	11.40	-65.04	3.66	V	-57.30	-25.00	1	1
	7 979.94	-62.90	10.70	-55.65	4.67	V	-49.62	-25.00		
	10 639.92	-65.94	11.20	-54.51	5.49	V	-48.80	-25.00		
	13 299.90	-64.43	12.00	-54.28	6.19	V	-48.47	-25.00		
	15 959.88	-66.37	15.10	-57.71	6.87	V	-49.48	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 70 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
506202 (2531.010)	5 062.02	-61.78	10.70	-62.76	3.65	V	-55.71	-25.00	1	187
	7 593.03	-65.49	11.15	-58.45	4.53	V	-51.83	-25.00		
	10 124.04	-63.82	11.10	-54.94	5.30	V	-49.14	-25.00		
	12 655.05	-64.01	11.90	-54.50	6.03	V	-48.63	-25.00		
	15 186.06	-59.89	14.20	-54.64	6.67	V	-47.11	-25.00		
518598 (2592.990)	5 185.98	-61.09	11.00	-62.59	3.70	V	-55.29	-25.00	1	1
	7 778.97	-64.36	10.90	-56.98	4.61	V	-50.69	-25.00		
	10 371.96	-64.89	11.20	-54.19	5.41	V	-48.40	-25.00		
	12 964.95	-64.86	12.00	-54.93	6.11	V	-49.04	-25.00		
	15 557.94	-62.84	15.40	-57.51	6.77	V	-48.88	-25.00		
531000 (2655.000)	5 310.00	-63.29	11.40	-65.53	3.65	V	-57.78	-25.00	1	1
	7 965.00	-63.32	10.70	-56.15	4.65	V	-50.10	-25.00		
	10 620.00	-65.38	11.20	-54.69	5.41	V	-48.90	-25.00		
	13 275.00	-64.33	12.10	-54.00	6.22	V	-48.12	-25.00		
	15 930.00	-65.98	15.00	-57.71	6.88	V	-49.59	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 80 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
507204 (2536.020)	5 072.04	-61.71	10.70	-62.99	3.62	V	-55.91	-25.00	1	215
	7 608.06	-65.29	11.20	-58.28	4.52	V	-51.60	-25.00		
	10 144.08	-63.71	11.05	-54.24	5.32	V	-48.51	-25.00		
	12 680.10	-63.90	11.90	-53.69	6.06	V	-47.85	-25.00		
	15 216.12	-59.77	14.40	-54.81	6.69	V	-47.10	-25.00		
518598 (2592.990)	5 185.98	-61.24	11.00	-62.74	3.70	V	-55.44	-25.00	1	1
	7 778.97	-64.21	10.90	-56.83	4.61	V	-50.54	-25.00		
	10 371.96	-64.83	11.20	-54.13	5.41	V	-48.34	-25.00		
	12 964.95	-64.45	12.00	-54.52	6.11	V	-48.63	-25.00		
	15 557.94	-62.70	15.40	-57.37	6.77	V	-48.74	-25.00		
529998 (2649.990)	5 299.98	-63.53	11.40	-65.64	3.69	V	-57.93	-25.00	1	1
	7 949.97	-63.22	10.70	-55.91	4.64	V	-49.85	-25.00		
	10 599.96	-65.17	11.20	-53.98	5.41	V	-48.19	-25.00		
	13 249.95	-64.33	12.10	-54.27	6.18	V	-48.35	-25.00		
	15 899.94	-65.88	15.00	-58.05	6.87	V	-49.92	-25.00		

- ▣ NR Band: n41
- ▣ Bandwidth: 90 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
508200 (2541.000)	5 082.00	-61.32	10.70	-62.96	3.61	V	-55.87	-25.00	1	243
	7 623.00	-65.19	11.20	-58.79	4.52	V	-52.11	-25.00		
	10 164.00	-63.19	11.00	-54.11	5.33	V	-48.44	-25.00		
	12 705.00	-64.05	11.90	-53.53	6.06	V	-47.69	-25.00		
	15 246.00	-59.91	14.50	-54.03	6.73	V	-46.26	-25.00		
518598 (2592.990)	5 185.98	-61.59	11.00	-63.09	3.70	V	-55.79	-25.00	1	1
	7 778.97	-64.38	10.90	-57.00	4.61	V	-50.71	-25.00		
	10 371.96	-64.59	11.20	-53.89	5.41	V	-48.10	-25.00		
	12 964.95	-65.02	12.00	-55.09	6.11	V	-49.20	-25.00		
	15 557.94	-63.14	15.40	-57.81	6.77	V	-49.18	-25.00		
528996 (2644.980)	5 289.96	-63.12	11.30	-64.59	3.73	V	-57.02	-25.00	1	1
	7 934.94	-63.59	10.70	-56.24	4.64	V	-50.18	-25.00		
	10 579.92	-65.82	11.20	-55.37	5.46	V	-49.63	-25.00		
	13 224.90	-64.08	12.10	-54.05	6.16	V	-48.11	-25.00		
	15 869.88	-65.05	14.90	-58.30	6.85	V	-50.25	-25.00		



- ▣ NR Band: n41
- ▣ Bandwidth: 100 MHz
- ▣ Modulation: PI/2 BPSK
- ▣ Distance: 1 meter
- ▣ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
509202 (2546.010)	5 092.02	-61.93	10.70	-64.08	3.64	V	-57.02	-25.00	1	271
	7 638.03	-64.47	11.20	-58.08	4.53	V	-51.41	-25.00		
	10 184.04	-65.09	11.00	-55.63	5.33	V	-49.96	-25.00		
	12 730.05	-63.27	11.90	-52.82	6.02	V	-46.94	-25.00		
	15 276.06	-61.17	14.60	-55.30	6.71	V	-47.41	-25.00		
518598 (2592.990)	5 185.98	-62.10	11.00	-63.60	3.70	V	-56.30	-25.00	1	1
	7 778.97	-64.95	10.90	-57.57	4.61	V	-51.28	-25.00		
	10 371.96	-62.95	11.20	-52.25	5.41	V	-46.46	-25.00		
	12 964.95	-64.03	12.00	-54.10	6.11	V	-48.21	-25.00		
	15 557.94	-59.93	15.40	-54.60	6.77	V	-45.97	-25.00		
528000 (2640.000)	5 280.00	-61.72	11.30	-63.63	3.75	V	-56.08	-25.00	1	1
	7 920.00	-62.27	10.70	-55.09	4.63	V	-49.02	-25.00		
	10 560.00	-64.71	11.20	-54.80	5.45	V	-49.05	-25.00		
	13 200.00	-63.86	12.10	-53.42	6.19	V	-47.51	-25.00		
	15 840.00	-61.29	14.90	-54.18	6.84	V	-46.12	-25.00		

## 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
Sub6 n41	10 MHz	2592.990	BPSK	24	0	4.21
			QPSK			5.51
			16-QAM			6.19
			64-QAM			6.24
			256-QAM			6.40
	15 MHz		BPSK	36		4.17
			QPSK			5.46
			16-QAM			6.11
			64-QAM			6.39
			256-QAM			6.37
	20 MHz		BPSK	50		4.10
			QPSK			5.39
			16-QAM			6.12
			64-QAM			6.38
			256-QAM			6.29
	25 MHz		BPSK	64		4.24
			QPSK			5.56
			16-QAM			6.14
			64-QAM			6.40
			256-QAM			6.56
30 MHz	BPSK	75	4.24			
	QPSK		5.38			
	16-QAM		6.08			
	64-QAM		6.41			
	256-QAM		6.41			
40 MHz	BPSK	100	4.26			
	QPSK		5.35			
	16-QAM		6.19			
	64-QAM		6.37			
	256-QAM		6.56			
50 MHz	BPSK	128	4.03			
	QPSK		5.35			
	16-QAM		6.14			
	64-QAM		6.28			
	256-QAM		6.47			

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( dB )
Sub6 n41	60 MHz	2592.990	BPSK	162	0	3.94
			QPSK			5.32
			16-QAM			6.09
			64-QAM			6.29
			256-QAM			6.40
	70 MHz		BPSK	180		4.07
			QPSK			5.38
			16-QAM			6.14
			64-QAM			6.26
			256-QAM			6.41
	80 MHz		BPSK	216		4.25
			QPSK			5.27
			16-QAM			6.03
			64-QAM			6.29
			256-QAM			6.39
	90 MHz		BPSK	243		4.28
			QPSK			5.22
			16-QAM			6.03
			64-QAM			6.25
			256-QAM			6.39
100 MHz	BPSK	270	4.68			
	QPSK		5.36			
	16-QAM		6.07			
	64-QAM		6.31			
	256-QAM		6.45			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 72 ~ 131.

## 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Sub6 n41	10 MHz	2592.990	BPSK	24	0	8.6580
			QPSK			8.7111
			16-QAM			8.6764
			64-QAM			8.6946
			256-QAM			8.5948
	15 MHz		BPSK	36		12.950
			QPSK			12.967
			16-QAM			12.998
			64-QAM			13.011
			256-QAM			12.953
	20 MHz		BPSK	50		17.972
			QPSK			17.999
			16-QAM			17.986
			64-QAM			17.948
			256-QAM			17.911
	25 MHz		BPSK	64		23.041
			QPSK			23.021
			16-QAM			22.987
			64-QAM			23.050
			256-QAM			22.997
30 MHz	BPSK	75	26.984			
	QPSK		26.864			
	16-QAM		26.876			
	64-QAM		27.035			
	256-QAM		26.953			
40 MHz	BPSK	100	35.877			
	QPSK		35.901			
	16-QAM		35.959			
	64-QAM		35.824			
	256-QAM		35.964			
50 MHz	BPSK	128	45.723			
	QPSK		45.824			
	16-QAM		46.005			
	64-QAM		45.922			
	256-QAM		45.911			

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data ( MHz )
Sub6 n41	60 MHz	2592.990	BPSK	162	0	58.011
			QPSK			57.909
			16-QAM			57.970
			64-QAM			57.998
			256-QAM			58.007
	70 MHz		BPSK	180		64.589
			QPSK			64.535
			16-QAM			64.464
			64-QAM			64.545
			256-QAM			64.387
	80 MHz		BPSK	216		77.249
			QPSK			77.413
			16-QAM			77.227
			64-QAM			77.418
			256-QAM			77.131
	90 MHz		BPSK	243		86.763
			QPSK			87.076
			16-QAM			87.025
			64-QAM			87.267
			256-QAM			86.699
100 MHz	BPSK	270	96.610			
	QPSK		96.578			
	16-QAM		96.473			
	64-QAM		96.735			
	256-QAM		96.531			

Note:


1. Plots of the EUT's Occupied Bandwidth are shown Page 132 ~ 191.

**9.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n41	10	2501.010	9.1286	37.805	-70.325	-32.520	-25.00
		2592.990	7.9716	37.805	-70.717	-32.912	
		2685.000	9.4212	37.805	-70.884	-33.079	
	15	2503.500	7.9950	37.805	-70.546	-32.741	
		2592.990	9.9766	37.805	-70.546	-32.741	
		2682.480	3.7638	37.190	-70.536	-33.346	
	20	2506.020	9.1281	37.805	-69.804	-31.999	
		2592.990	7.1491	37.805	-70.648	-32.843	
		2679.990	9.9716	37.805	-70.815	-33.010	
	25	2508.510	9.6979	37.805	-70.424	-32.619	
		2592.990	9.7183	37.805	-70.435	-32.630	
		2677.500	7.7418	37.805	-70.223	-32.418	
	30	2511.000	3.8111	37.190	-70.127	-32.937	
		2592.990	8.2488	37.805	-69.499	-31.694	
		2674.980	4.0803	37.190	-71.045	-33.855	
	40	2516.010	7.7617	37.805	-71.040	-33.235	
		2592.990	4.0504	37.190	-69.416	-32.226	
		2670.000	8.2722	37.805	-70.658	-32.853	
	50	2521.020	8.2373	37.805	-70.154	-32.349	
		2592.990	3.9946	37.190	-70.363	-33.173	
		2664.990	8.2577	37.805	-70.112	-32.307	
	60	2526.000	5.1940	37.805	-70.628	-32.823	
		2592.990	9.4377	37.805	-70.584	-32.779	
		2659.980	3.7688	37.190	-70.571	-33.381	
	70	2531.010	8.5952	37.805	-70.269	-32.464	
		2592.990	9.9761	37.805	-70.761	-32.956	
		2655.000	3.7199	37.190	-71.066	-33.876	
	80	2536.020	5.2129	37.805	-70.389	-32.584	
		2592.990	3.7349	37.190	-69.830	-32.640	
		2649.990	7.9831	37.805	-70.417	-32.612	
90	2541.000	3.7717	37.190	-70.643	-33.453		
	2592.990	3.8435	37.190	-70.895	-33.705		
	2644.980	4.0768	37.190	-70.354	-33.164		
100	2546.010	3.7418	37.190	-70.367	-33.177		
	2592.990	8.8829	37.805	-69.899	-32.094		
		2640.000	3.7673	37.190	-70.925	-33.735	

Note:

1. Plots of the EUT’s Conducted Spurious Emissions are shown Page 192 ~ 263.
2. Duty Cycle factor already applied on the factor.
  - Duty Cycle Factor(dB) = 6.99

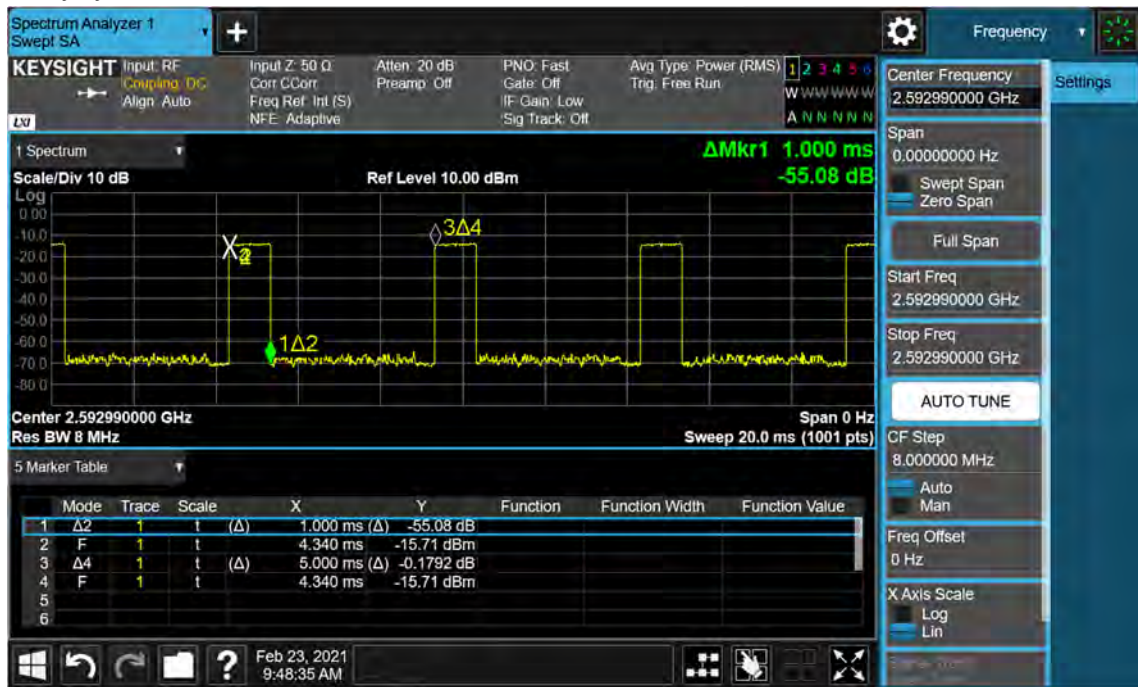

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
- Result(dBm) = Reading + Factor

3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	34.484
1 – 5	37.190
5 – 10	37.805
10 – 15	38.330
15 – 20	38.703
Above 20	39.345

### 9.6 CHANNEL EDGE

BW	Test. Frequency (MHz)	Modulation	Resource Block Size	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
10 MHz	2501.010	BPSK	Full RB	-24.49	-24.15	-25.17	-24.08	-28.86	-24.40	-40.26
15 MHz	2503.500	BPSK	Full RB	-23.25	-27.59	-25.76	-25.45	-27.02	-22.94	-42.86
20 MHz	2506.020	BPSK	Full RB	-24.17	-25.85	-27.17	-25.79	-27.70	-25.70	-44.65
25 MHz	2508.510	BPSK	Full RB	-25.21	-25.98	-27.81	-27.19	-29.53	-25.51	-44.37
30 MHz	2511.000	BPSK	Full RB	-24.74	-27.08	-27.28	-28.76	-31.04	-28.44	-47.07
40 MHz	2516.010	BPSK	Full RB	-24.62	-26.72	-28.26	-25.77	-30.71	-27.08	-43.62
50 MHz	2521.020	BPSK	Full RB	-27.04	-28.40	-30.70	-29.51	-33.73	-28.67	-46.09
60 MHz	2526.000	BPSK	Full RB	-20.66	-18.82	-30.28	-27.99	-32.88	-31.34	-46.89
70 MHz	2531.010	BPSK	Full RB	-26.07	-28.07	-30.43	-30.92	-35.07	-29.97	-46.93
80 MHz	2536.020	BPSK	Full RB	-26.80	-26.60	-33.16	-30.45	-35.65	-31.12	-46.59
90 MHz	2541.000	BPSK	Full RB	-25.05	-26.27	-30.00	-27.26	-32.97	-29.14	-40.94
100 MHz	2546.010	BPSK	Full RB	-24.35	-30.77	-33.19	-31.28	-35.11	-32.85	-47.57
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0



Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E		(C.E $\pm$ 1 MHz)	
					~		~	
					(C.E $\pm$ 1 MHz)		(C.E $\pm$ 5 MHz)	
					Lower	Upper	Lower	Upper
10 MHz	2592.990	BPSK	Full RB	0	-21.73	-23.93	-25.05	-25.95
	2685.000	BPSK	Full RB	0	-21.37	-24.49	-27.28	-27.48
15 MHz	2592.990	BPSK	Full RB	0	-22.86	-29.32	-26.68	-29.37
	2682.480	BPSK	Full RB	0	-18.76	-30.86	-27.42	-28.14
20 MHz	2592.990	BPSK	Full RB	0	-23.39	-25.26	-23.71	-24.09
	2679.990	BPSK	Full RB	0	-23.82	-26.84	-26.38	-26.60
25 MHz	2592.990	BPSK	Full RB	0	-22.26	-27.05	-26.11	-28.12
	2677.500	BPSK	Full RB	0	-23.75	-27.77	-28.05	-28.93
30 MHz	2592.990	BPSK	Full RB	0	-23.29	-30.07	-27.20	-29.85
	2679.990	BPSK	Full RB	0	-24.74	-29.48	-27.28	-29.98
40 MHz	2592.990	BPSK	Full RB	0	-24.30	-30.71	-28.99	-32.11
	2670.000	BPSK	Full RB	0	-24.75	-30.41	-27.54	-30.43
50 MHz	2592.990	BPSK	Full RB	0	-23.93	-29.77	-29.64	-32.27
	2664.990	BPSK	Full RB	0	-24.20	-27.58	-28.26	-28.82
60 MHz	2592.990	BPSK	Full RB	0	-17.98	-20.46	-30.65	-31.54
	2659.980	BPSK	Full RB	0	-19.17	-20.48	-29.92	-30.34
70 MHz	2592.990	BPSK	Full RB	0	-24.57	-32.41	-30.99	-31.88
	2655.000	BPSK	Full RB	0	-22.93	-29.75	-27.51	-30.71
80 MHz	2592.990	BPSK	Full RB	0	-24.79	-30.36	-32.29	-34.35
	2649.990	BPSK	Full RB	0	-22.82	-29.02	-29.69	-31.71
90 MHz	2592.990	BPSK	Full RB	0	-23.21	-33.21	-31.62	-33.98
	2644.980	BPSK	Full RB	0	-21.30	-30.28	-28.45	-31.20
100 MHz	2592.990	BPSK	Full RB	0	-20.75	-34.10	-32.66	-35.51
	2640.000	BPSK	Full RB	0	-20.47	-32.68	-30.60	-33.99
Limit (dBm)					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E $\pm$ 5 MHz)		Above (C.E $\pm$ X MHz)	
					~			
					(C.E $\pm$ X MHz)		Lower	Upper
10 MHz	2592.990	BPSK	Full RB	0	-27.98	-28.91	-43.12	-45.39
	2685.000	BPSK	Full RB	0	-28.06	-27.78	-43.27	-47.01
15 MHz	2592.990	BPSK	Full RB	0	-27.85	-27.17	-46.75	-47.26
	2682.480	BPSK	Full RB	0	-27.27	-28.10	-44.30	-44.30
20 MHz	2592.990	BPSK	Full RB	0	-27.78	-28.48	-44.52	-46.48
	2679.990	BPSK	Full RB	0	-26.33	-28.05	-46.52	-47.86
25 MHz	2592.990	BPSK	Full RB	0	-29.86	-30.66	-46.76	-47.18
	2677.500	BPSK	Full RB	0	-29.29	-29.93	-45.85	-47.49
30 MHz	2592.990	BPSK	Full RB	0	-29.19	-30.03	-46.79	-47.44
	2679.990	BPSK	Full RB	0	-29.97	-30.56	-47.20	-48.24
40 MHz	2592.990	BPSK	Full RB	0	-32.25	-33.68	-47.93	-47.73
	2670.000	BPSK	Full RB	0	-31.32	-31.58	-47.01	-48.24
50 MHz	2592.990	BPSK	Full RB	0	-33.59	-34.70	-47.58	-47.59
	2664.990	BPSK	Full RB	0	-28.46	-29.58	-45.95	-48.67
60 MHz	2592.990	BPSK	Full RB	0	-30.88	-34.60	-47.75	-47.77
	2659.980	BPSK	Full RB	0	-29.23	-31.07	-46.80	-48.13
70 MHz	2592.990	BPSK	Full RB	0	-31.09	-34.78	-48.59	-47.71
	2655.000	BPSK	Full RB	0	-27.65	-31.62	-46.77	-47.95
80 MHz	2592.990	BPSK	Full RB	0	-31.44	-33.17	-47.78	-48.34
	2649.990	BPSK	Full RB	0	-29.96	-31.37	-47.41	-48.54
90 MHz	2592.990	BPSK	Full RB	0	-32.62	-34.56	-47.91	-48.49
	2644.980	BPSK	Full RB	0	-30.00	-33.60	-48.53	-48.51
100 MHz	2592.990	BPSK	Full RB	0	-34.28	-35.99	-48.00	-48.58
	2640.000	BPSK	Full RB	0	-30.23	-34.03	-47.71	-48.63
Limit (dBm)					-13.0		-25.0	

**Note:**

1. C.E = Channel Edge
2. X = X is the greater of 6 MHz or the actual emission bandwidth
3. Duty Cycle factor already applied on the factor.
  - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
  - Result(dBm) = Reading + Factor
  - Duty Cycle Factor(dB) = 6.99
4. Plots of the EUT's Channel Edge are shown Page 264 ~ 347. (1RB & Full RB)

### 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

▣ BandWidth:	<u>10 MHz</u>
▣ Voltage(100 %):	<u>3.880 VDC</u>
▣ Batt. Endpoint:	<u>3.300 VDC</u>
▣ LIMIT:	<u>Emission must remain in band</u>

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2501.010	100 %	+20(Ref)	2501 010 000	0.0	0.000 000	0.000
	100 %	-30	2501 009 996	-4.0	0.000 000	-0.002
	100 %	-20	2501 009 995	-5.0	0.000 000	-0.002
	100 %	-10	2501 009 997	-3.6	0.000 000	-0.001
	100 %	0	2501 009 998	-2.0	0.000 000	-0.001
	100 %	+10	2501 009 999	-1.6	0.000 000	-0.001
	100 %	+30	2501 010 000	-0.6	0.000 000	0.000
	100 %	+40	2501 009 998	-2.3	0.000 000	-0.001
	100 %	+50	2501 009 996	-4.3	0.000 000	-0.002
	Batt. Endpoint	+20	2501 010 000	0.0	0.000 000	0.000
2685.000	100 %	+20(Ref)	2684 999 997	0.0	0.000 000	0.000
	100 %	-30	2684 999 994	-3.7	0.000 000	-0.001
	100 %	-20	2684 999 994	-3.4	0.000 000	-0.001
	100 %	-10	2684 999 993	-4.4	0.000 000	-0.002
	100 %	0	2684 999 992	-5.9	0.000 000	-0.002
	100 %	+10	2684 999 992	-5.3	0.000 000	-0.002
	100 %	+30	2684 999 994	-4.0	0.000 000	-0.001
	100 %	+40	2684 999 991	-6.3	0.000 000	-0.002
	100 %	+50	2684 999 993	-4.7	0.000 000	-0.002
	Batt. Endpoint	+20	2684 999 991	-6.5	0.000 000	-0.002

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2503.500	100 %	+20(Ref)	2503 499 996	0.0	0.000 000	0.000
	100 %	-30	2503 499 994	-1.5	0.000 000	-0.001
	100 %	-20	2503 499 997	0.8	0.000 000	0.000
	100 %	-10	2503 499 993	-2.5	0.000 000	-0.001
	100 %	0	2503 499 992	-4.1	0.000 000	-0.002
	100 %	+10	2503 499 995	-0.5	0.000 000	0.000
	100 %	+30	2503 499 990	-5.8	0.000 000	-0.002
	100 %	+40	2503 499 994	-2.2	0.000 000	-0.001
	100 %	+50	2503 499 991	-5.0	0.000 000	-0.002
	Batt. Endpoint	+20	2503 499 990	-5.4	0.000 000	-0.002
2682.480	100 %	+20(Ref)	2682 479 997	0.0	0.000 000	0.000
	100 %	-30	2682 479 992	-4.9	0.000 000	-0.002
	100 %	-20	2682 479 993	-3.9	0.000 000	-0.001
	100 %	-10	2682 479 989	-8.0	0.000 000	-0.003
	100 %	0	2682 479 991	-5.6	0.000 000	-0.002
	100 %	+10	2682 479 991	-6.2	0.000 000	-0.002
	100 %	+30	2682 479 993	-3.7	0.000 000	-0.001
	100 %	+40	2682 479 991	-5.6	0.000 000	-0.002
	100 %	+50	2682 479 991	-5.9	0.000 000	-0.002
	Batt. Endpoint	+20	2682 479 991	-5.7	0.000 000	-0.002

- ▣ BandWidth: 20 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2506.020	100 %	+20(Ref)	2506 019 999	0.0	0.000 000	0.000
	100 %	-30	2506 019 997	-1.6	0.000 000	-0.001
	100 %	-20	2506 019 998	-0.8	0.000 000	0.000
	100 %	-10	2506 019 999	-0.1	0.000 000	0.000
	100 %	0	2506 020 000	1.1	0.000 000	0.000
	100 %	+10	2506 019 993	-6.2	0.000 000	-0.002
	100 %	+30	2506 019 996	-2.3	0.000 000	-0.001
	100 %	+40	2506 019 995	-3.9	0.000 000	-0.002
	100 %	+50	2506 019 998	-0.4	0.000 000	0.000
	Batt. Endpoint	+20	2506 019 995	-3.4	0.000 000	-0.001
2679.990	100 %	+20(Ref)	2679 989 996	0.0	0.000 000	0.000
	100 %	-30	2679 989 991	-4.9	0.000 000	-0.002
	100 %	-20	2679 989 990	-5.9	0.000 000	-0.002
	100 %	-10	2679 989 989	-7.0	0.000 000	-0.003
	100 %	0	2679 989 991	-4.5	0.000 000	-0.002
	100 %	+10	2679 989 988	-7.4	0.000 000	-0.003
	100 %	+30	2679 989 993	-2.6	0.000 000	-0.001
	100 %	+40	2679 989 997	1.5	0.000 000	0.001
	100 %	+50	2679 989 992	-3.6	0.000 000	-0.001
	Batt. Endpoint	+20	2679 989 989	-6.9	0.000 000	-0.003

- ▣ BandWidth: 25 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2508.510	100 %	+20(Ref)	2508 510 000	0.0	0.000 000	0.000
	100 %	-30	2508 509 995	-4.5	0.000 000	-0.002
	100 %	-20	2508 509 996	-3.4	0.000 000	-0.001
	100 %	-10	2508 509 996	-4.2	0.000 000	-0.002
	100 %	0	2508 509 997	-2.9	0.000 000	-0.001
	100 %	+10	2508 509 997	-2.6	0.000 000	-0.001
	100 %	+30	2508 509 995	-4.6	0.000 000	-0.002
	100 %	+40	2508 509 998	-1.5	0.000 000	-0.001
	100 %	+50	2508 509 997	-2.3	0.000 000	-0.001
	Batt. Endpoint	+20	2508 510 000	0.2	0.000 000	0.000
2677.500	100 %	+20(Ref)	2677 499 998	0.0	0.000 000	0.000
	100 %	-30	2677 499 994	-3.7	0.000 000	-0.001
	100 %	-20	2677 499 994	-3.9	0.000 000	-0.001
	100 %	-10	2677 499 993	-5.0	0.000 000	-0.002
	100 %	0	2677 499 994	-4.0	0.000 000	-0.001
	100 %	+10	2677 499 994	-3.7	0.000 000	-0.001
	100 %	+30	2677 499 994	-4.0	0.000 000	-0.001
	100 %	+40	2677 499 994	-4.2	0.000 000	-0.002
	100 %	+50	2677 499 995	-3.0	0.000 000	-0.001
	Batt. Endpoint	+20	2677 499 996	-2.3	0.000 000	-0.001

- ▣ BandWidth: 30 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2511.000	100 %	+20(Ref)	2510 999 996	0.0	0.000 000	0.000
	100 %	-30	2510 999 996	-0.7	0.000 000	0.000
	100 %	-20	2510 999 994	-2.3	0.000 000	-0.001
	100 %	-10	2510 999 991	-5.0	0.000 000	-0.002
	100 %	0	2510 999 995	-1.2	0.000 000	0.000
	100 %	+10	2510 999 992	-4.6	0.000 000	-0.002
	100 %	+30	2510 999 993	-3.8	0.000 000	-0.002
	100 %	+40	2510 999 994	-2.0	0.000 000	-0.001
	100 %	+50	2510 999 993	-3.8	0.000 000	-0.001
	Batt. Endpoint	+20	2510 999 995	-0.9	0.000 000	0.000
2674.980	100 %	+20(Ref)	2674 979 991	0.0	0.000 000	0.000
	100 %	-30	2674 979 985	-6.0	0.000 000	-0.002
	100 %	-20	2674 979 986	-5.5	0.000 000	-0.002
	100 %	-10	2674 979 985	-6.0	0.000 000	-0.002
	100 %	0	2674 979 985	-6.5	0.000 000	-0.002
	100 %	+10	2674 979 985	-5.7	0.000 000	-0.002
	100 %	+30	2674 979 981	-9.7	0.000 000	-0.004
	100 %	+40	2674 979 985	-5.7	0.000 000	-0.002
	100 %	+50	2674 979 986	-4.7	0.000 000	-0.002
	Batt. Endpoint	+20	2674 979 987	-4.0	0.000 000	-0.001

- ▣ BandWidth: 40 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2516.010	100 %	+20(Ref)	2516 009 995	0.0	0.000 000	0.000
	100 %	-30	2516 009 992	-3.4	0.000 000	-0.001
	100 %	-20	2516 009 994	-1.1	0.000 000	0.000
	100 %	-10	2516 009 996	0.7	0.000 000	0.000
	100 %	0	2516 009 992	-3.3	0.000 000	-0.001
	100 %	+10	2516 009 991	-4.2	0.000 000	-0.002
	100 %	+30	2516 009 994	-1.3	0.000 000	-0.001
	100 %	+40	2516 009 991	-4.6	0.000 000	-0.002
	100 %	+50	2516 009 993	-2.4	0.000 000	-0.001
	Batt. Endpoint	+20	2516 009 991	-4.4	0.000 000	-0.002
2670.000	100 %	+20(Ref)	2669 999 997	0.0	0.000 000	0.000
	100 %	-30	2669 999 995	-2.4	0.000 000	-0.001
	100 %	-20	2669 999 993	-3.6	0.000 000	-0.001
	100 %	-10	2669 999 994	-3.5	0.000 000	-0.001
	100 %	0	2669 999 993	-4.2	0.000 000	-0.002
	100 %	+10	2669 999 993	-4.3	0.000 000	-0.002
	100 %	+30	2669 999 989	-7.6	0.000 000	-0.003
	100 %	+40	2669 999 993	-4.3	0.000 000	-0.002
	100 %	+50	2669 999 994	-2.6	0.000 000	-0.001
	Batt. Endpoint	+20	2669 999 991	-6.0	0.000 000	-0.002



- ▣ BandWidth: 50 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2521.020	100 %	+20(Ref)	2521 019 998	0.0	0.000 000	0.000
	100 %	-30	2521 019 997	-1.3	0.000 000	-0.001
	100 %	-20	2521 019 996	-2.0	0.000 000	-0.001
	100 %	-10	2521 019 994	-3.7	0.000 000	-0.001
	100 %	0	2521 019 994	-4.0	0.000 000	-0.002
	100 %	+10	2521 019 994	-4.6	0.000 000	-0.002
	100 %	+30	2521 019 994	-3.8	0.000 000	-0.001
	100 %	+40	2521 019 996	-2.5	0.000 000	-0.001
	100 %	+50	2521 019 996	-1.8	0.000 000	-0.001
	Batt. Endpoint	+20	2521 019 994	-4.5	0.000 000	-0.002
2664.990	100 %	+20(Ref)	2664 989 991	0.0	0.000 000	0.000
	100 %	-30	2664 989 987	-4.8	0.000 000	-0.002
	100 %	-20	2664 989 988	-3.6	0.000 000	-0.001
	100 %	-10	2664 989 987	-4.8	0.000 000	-0.002
	100 %	0	2664 989 991	-0.3	0.000 000	0.000
	100 %	+10	2664 989 987	-4.6	0.000 000	-0.002
	100 %	+30	2664 989 989	-2.5	0.000 000	-0.001
	100 %	+40	2664 989 989	-2.6	0.000 000	-0.001
	100 %	+50	2664 989 990	-1.0	0.000 000	0.000
	Batt. Endpoint	+20	2664 989 984	-7.8	0.000 000	-0.003

- ▣ BandWidth: 60 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2526.000	100 %	+20(Ref)	2526 000 000	0.0	0.000 000	0.000
	100 %	-30	2525 999 998	-2.5	0.000 000	-0.001
	100 %	-20	2526 000 001	0.6	0.000 000	0.000
	100 %	-10	2525 999 997	-3.4	0.000 000	-0.001
	100 %	0	2525 999 998	-2.5	0.000 000	-0.001
	100 %	+10	2526 000 002	1.6	0.000 000	0.001
	100 %	+30	2526 000 000	-0.5	0.000 000	0.000
	100 %	+40	2525 999 997	-3.3	0.000 000	-0.001
	100 %	+50	2526 000 001	0.4	0.000 000	0.000
	Batt. Endpoint	+20	2525 999 999	-1.4	0.000 000	-0.001
2659.980	100 %	+20(Ref)	2659 979 993	0.0	0.000 000	0.000
	100 %	-30	2659 979 987	-5.7	0.000 000	-0.002
	100 %	-20	2659 979 988	-4.9	0.000 000	-0.002
	100 %	-10	2659 979 986	-7.2	0.000 000	-0.003
	100 %	0	2659 979 987	-5.8	0.000 000	-0.002
	100 %	+10	2659 979 987	-5.9	0.000 000	-0.002
	100 %	+30	2659 979 986	-7.2	0.000 000	-0.003
	100 %	+40	2659 979 987	-5.7	0.000 000	-0.002
	100 %	+50	2659 979 988	-5.0	0.000 000	-0.002
	Batt. Endpoint	+20	2659 979 990	-2.6	0.000 000	-0.001

- ▣ BandWidth: 70 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2531.010	100 %	+20(Ref)	2531 010 000	0.0	0.000 000	0.000
	100 %	-30	2531 010 002	1.1	0.000 000	0.000
	100 %	-20	2531 009 999	-1.7	0.000 000	-0.001
	100 %	-10	2531 010 002	1.6	0.000 000	0.001
	100 %	0	2531 009 998	-2.5	0.000 000	-0.001
	100 %	+10	2531 009 997	-3.3	0.000 000	-0.001
	100 %	+30	2531 010 001	0.4	0.000 000	0.000
	100 %	+40	2531 010 001	0.4	0.000 000	0.000
	100 %	+50	2531 010 000	-0.6	0.000 000	0.000
	Batt. Endpoint	+20	2531 009 999	-1.7	0.000 000	-0.001
2655.000	100 %	+20(Ref)	2654 999 997	0.0	0.000 000	0.000
	100 %	-30	2654 999 998	0.6	0.000 000	0.000
	100 %	-20	2654 999 993	-4.3	0.000 000	-0.002
	100 %	-10	2654 999 995	-2.6	0.000 000	-0.001
	100 %	0	2654 999 993	-3.9	0.000 000	-0.001
	100 %	+10	2654 999 995	-2.4	0.000 000	-0.001
	100 %	+30	2654 999 995	-2.4	0.000 000	-0.001
	100 %	+40	2654 999 993	-4.3	0.000 000	-0.002
	100 %	+50	2654 999 995	-2.2	0.000 000	-0.001
	Batt. Endpoint	+20	2654 999 991	-6.7	0.000 000	-0.003

- ▣ BandWidth: 80 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2536.020	100 %	+20(Ref)	2536 019 998	0.0	0.000 000	0.000
	100 %	-30	2536 019 998	-0.3	0.000 000	0.000
	100 %	-20	2536 019 996	-1.7	0.000 000	-0.001
	100 %	-10	2536 020 002	4.3	0.000 000	0.002
	100 %	0	2536 020 002	4.3	0.000 000	0.002
	100 %	+10	2536 019 996	-1.9	0.000 000	-0.001
	100 %	+30	2536 019 997	-0.5	0.000 000	0.000
	100 %	+40	2536 019 997	-1.0	0.000 000	0.000
	100 %	+50	2536 019 996	-2.0	0.000 000	-0.001
	Batt. Endpoint	+20	2536 019 999	0.9	0.000 000	0.000
2649.990	100 %	+20(Ref)	2649 989 997	0.0	0.000 000	0.000
	100 %	-30	2649 989 993	-4.3	0.000 000	-0.002
	100 %	-20	2649 989 993	-4.0	0.000 000	-0.002
	100 %	-10	2649 989 994	-3.7	0.000 000	-0.001
	100 %	0	2649 989 993	-4.0	0.000 000	-0.002
	100 %	+10	2649 989 993	-4.5	0.000 000	-0.002
	100 %	+30	2649 989 990	-6.9	0.000 000	-0.003
	100 %	+40	2649 989 990	-7.4	0.000 000	-0.003
	100 %	+50	2649 989 991	-5.9	0.000 000	-0.002
	Batt. Endpoint	+20	2649 989 992	-5.6	0.000 000	-0.002

▣ BandWidth:	<u>90 MHz</u>
▣ Voltage(100 %):	<u>3.880 VDC</u>
▣ Batt. Endpoint:	<u>3.300 VDC</u>
▣ LIMIT:	<u>Emission must remain in band</u>


Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2541.000	100 %	+20(Ref)	2540 999 998	0.0	0.000 000	0.000
	100 %	-30	2540 999 996	-2.5	0.000 000	-0.001
	100 %	-20	2540 999 994	-4.2	0.000 000	-0.002
	100 %	-10	2540 999 997	-1.7	0.000 000	-0.001
	100 %	0	2540 999 997	-1.7	0.000 000	-0.001
	100 %	+10	2540 999 996	-1.9	0.000 000	-0.001
	100 %	+30	2540 999 997	-1.2	0.000 000	0.000
	100 %	+40	2540 999 998	-0.5	0.000 000	0.000
	100 %	+50	2540 999 993	-4.9	0.000 000	-0.002
	Batt. Endpoint	+20	2540 999 994	-4.0	0.000 000	-0.002
2644.980	100 %	+20(Ref)	2644 979 997	0.0	0.000 000	0.000
	100 %	-30	2644 979 994	-2.8	0.000 000	-0.001
	100 %	-20	2644 979 992	-4.6	0.000 000	-0.002
	100 %	-10	2644 979 992	-5.2	0.000 000	-0.002
	100 %	0	2644 979 991	-5.9	0.000 000	-0.002
	100 %	+10	2644 979 996	-1.0	0.000 000	0.000
	100 %	+30	2644 979 993	-4.2	0.000 000	-0.002
	100 %	+40	2644 979 993	-3.6	0.000 000	-0.001
	100 %	+50	2644 979 992	-5.3	0.000 000	-0.002
	Batt. Endpoint	+20	2644 979 991	-5.7	0.000 000	-0.002

- ▣ BandWidth: 100 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency Error	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	(Hz)	(%)	
2546.010	100 %	+20(Ref)	2546 009 999	0.0	0.000 000	0.000
	100 %	-30	2546 009 998	-1.1	0.000 000	0.000
	100 %	-20	2546 009 996	-3.3	0.000 000	-0.001
	100 %	-10	2546 009 998	-1.0	0.000 000	0.000
	100 %	0	2546 010 000	1.5	0.000 000	0.001
	100 %	+10	2546 009 996	-2.8	0.000 000	-0.001
	100 %	+30	2546 009 998	-0.4	0.000 000	0.000
	100 %	+40	2546 009 994	-4.7	0.000 000	-0.002
	100 %	+50	2546 010 000	0.7	0.000 000	0.000
	Batt. Endpoint	+20	2546 009 997	-2.4	0.000 000	-0.001
2640.000	100 %	+20(Ref)	2639 999 996	0.0	0.000 000	0.000
	100 %	-30	2639 999 993	-3.9	0.000 000	-0.001
	100 %	-20	2639 999 992	-4.3	0.000 000	-0.002
	100 %	-10	2639 999 993	-3.2	0.000 000	-0.001
	100 %	0	2639 999 994	-2.3	0.000 000	-0.001
	100 %	+10	2639 999 990	-6.1	0.000 000	-0.002
	100 %	+30	2639 999 994	-2.1	0.000 000	-0.001
	100 %	+40	2639 999 994	-2.1	0.000 000	-0.001
	100 %	+50	2639 999 994	-2.3	0.000 000	-0.001
	Batt. Endpoint	+20	2639 999 994	-2.0	0.000 000	-0.001

## 10. TEST PLOTS

NR41\_10 M\_PAR\_Mid\_BPSK\_FullRB

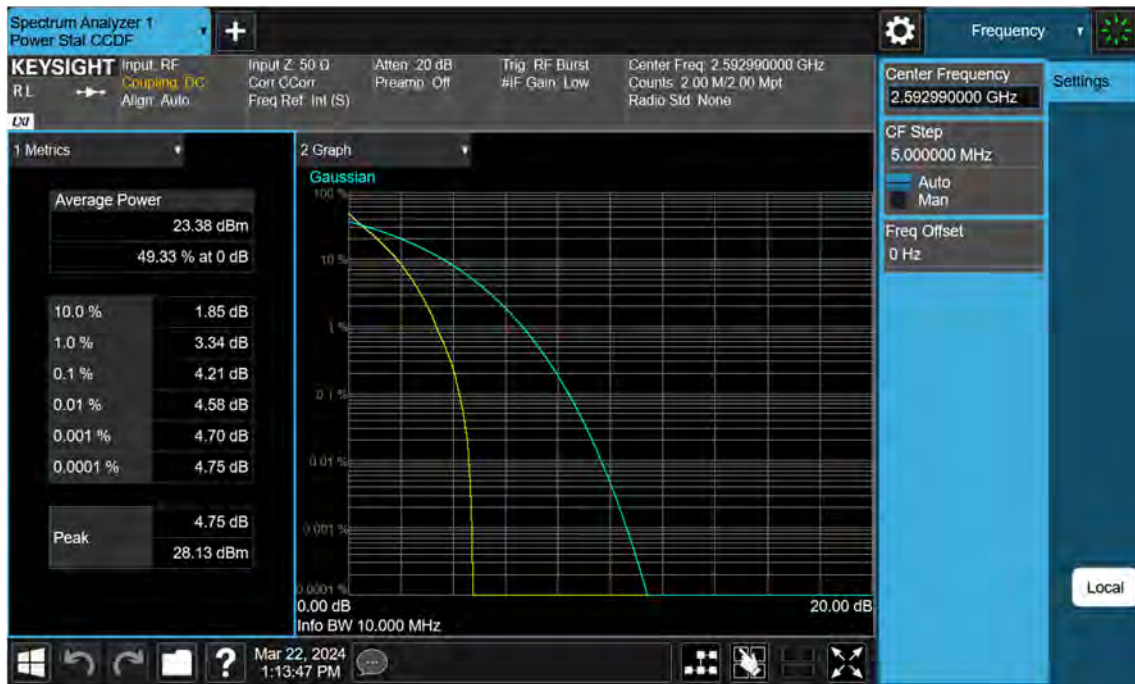



NR41\_10 M\_PAR\_Mid\_QPSK\_FullRB



NR41\_10 M\_PAR\_Mid\_16QAM\_FullRB




NR41\_10 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_10 M\_PAR\_Mid\_256QAM\_FullRB



NR41\_15 M\_PAR\_Mid\_BPSK\_FullIRB

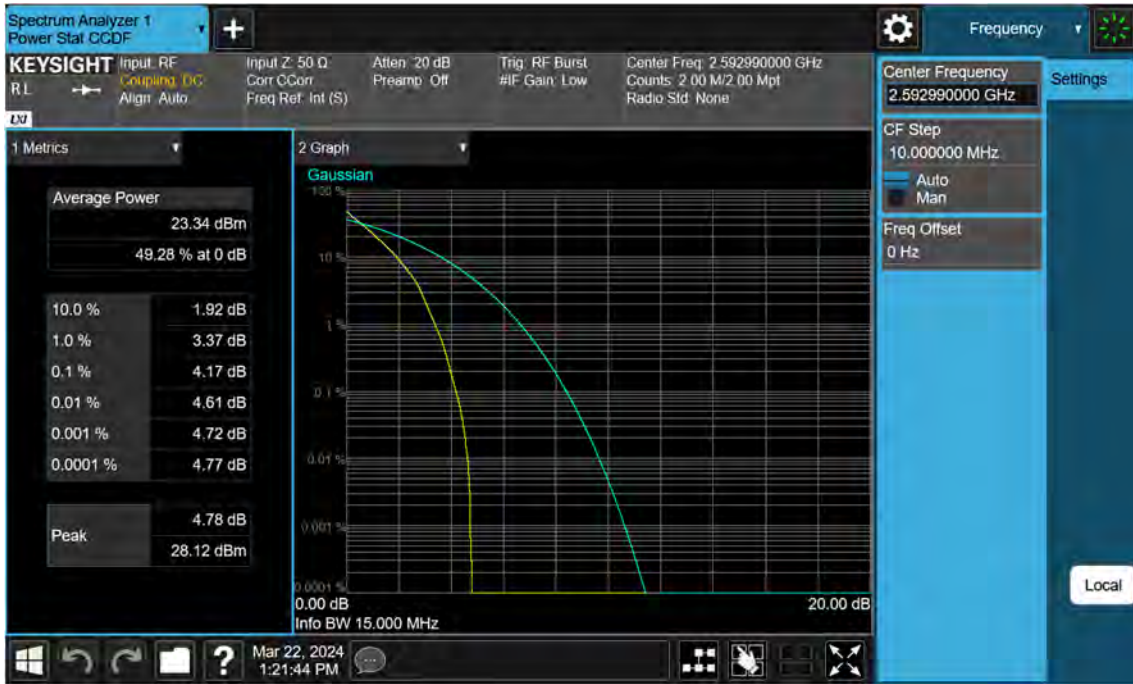

NR41\_15 M\_PAR\_Mid\_QPSK\_FullRB





NR41\_15 M\_PAR\_Mid\_16QAM\_FullRB



NR41\_15 M\_PAR\_Mid\_64QAM\_FullRB





NR41\_15 M\_PAR\_Mid\_256QAM\_FullRB




NR41\_20 M\_PAR\_Mid\_BPSK\_FullIRB



NR41\_20 M\_PAR\_Mid\_QPSK\_FullRB



NR41\_20 M\_PAR\_Mid\_16QAM\_FullRB

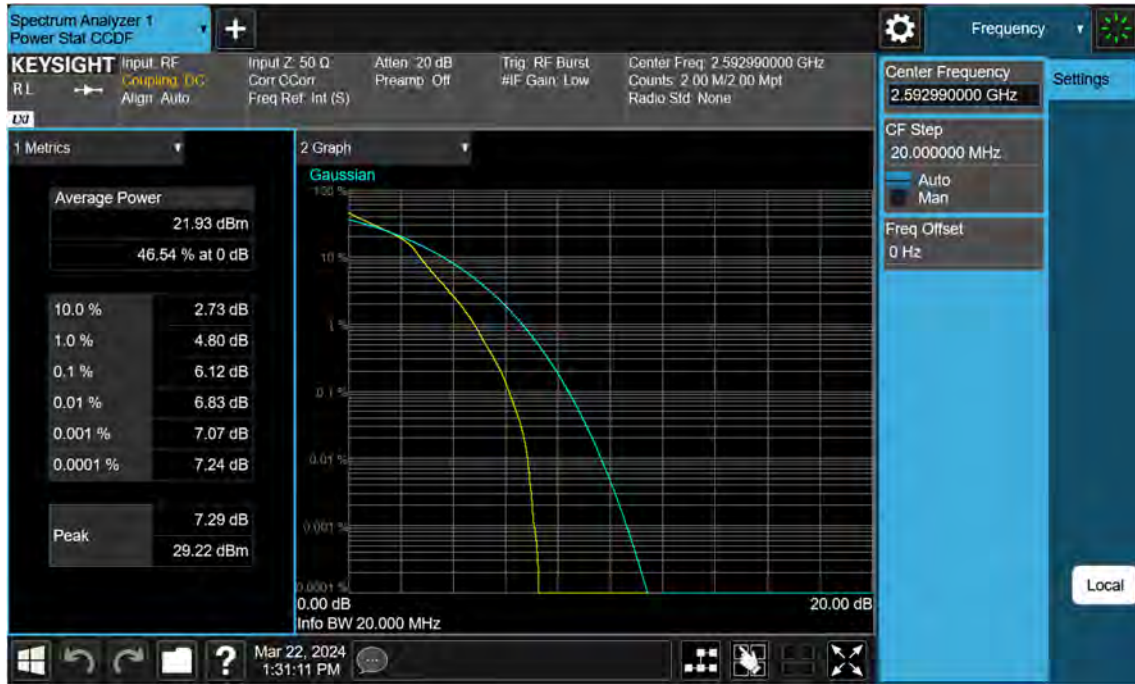

NR41\_20 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_20 M\_PAR\_Mid\_256QAM\_FullRB





NR41\_25 M\_PAR\_Mid\_BPSK\_FullIRB



NR41\_25 M\_PAR\_Mid\_QPSK\_FullRB






NR41\_25 M\_PAR\_Mid\_16QAM\_FullRB



NR41\_25 M\_PAR\_Mid\_64QAM\_FullRB

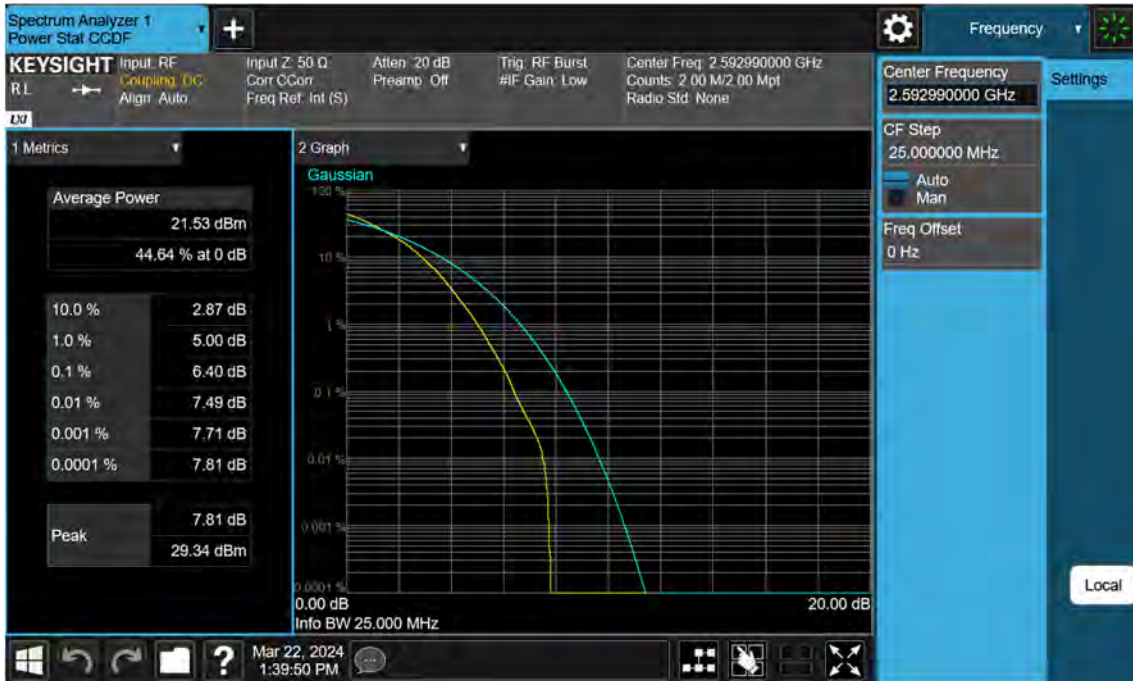


NR41\_25 M\_PAR\_Mid\_256QAM\_FullRB



NR41\_30 M\_PAR\_Mid\_BPSK\_FullIRB



NR41\_30 M\_PAR\_Mid\_QPSK\_FullRB

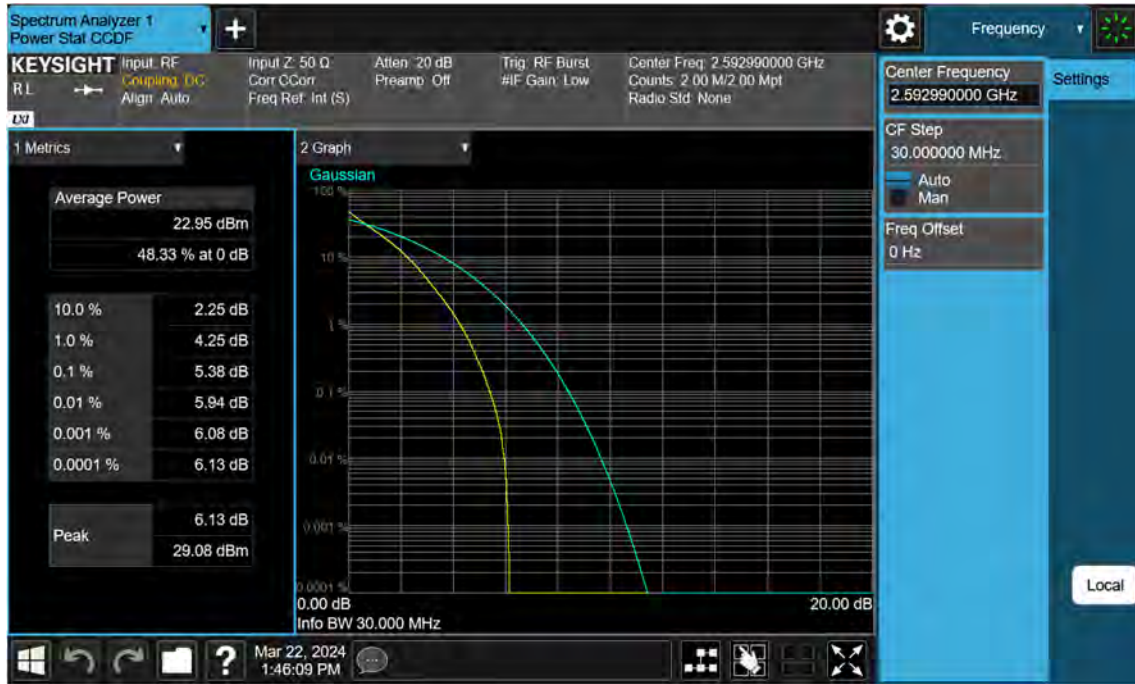

NR41\_30 M\_PAR\_Mid\_16QAM\_FullRB





NR41\_30 M\_PAR\_Mid\_64QAM\_FullRB




NR41\_30 M\_PAR\_Mid\_256QAM\_FullRB





NR41\_40 M\_PAR\_Mid\_BPSK\_FullIRB

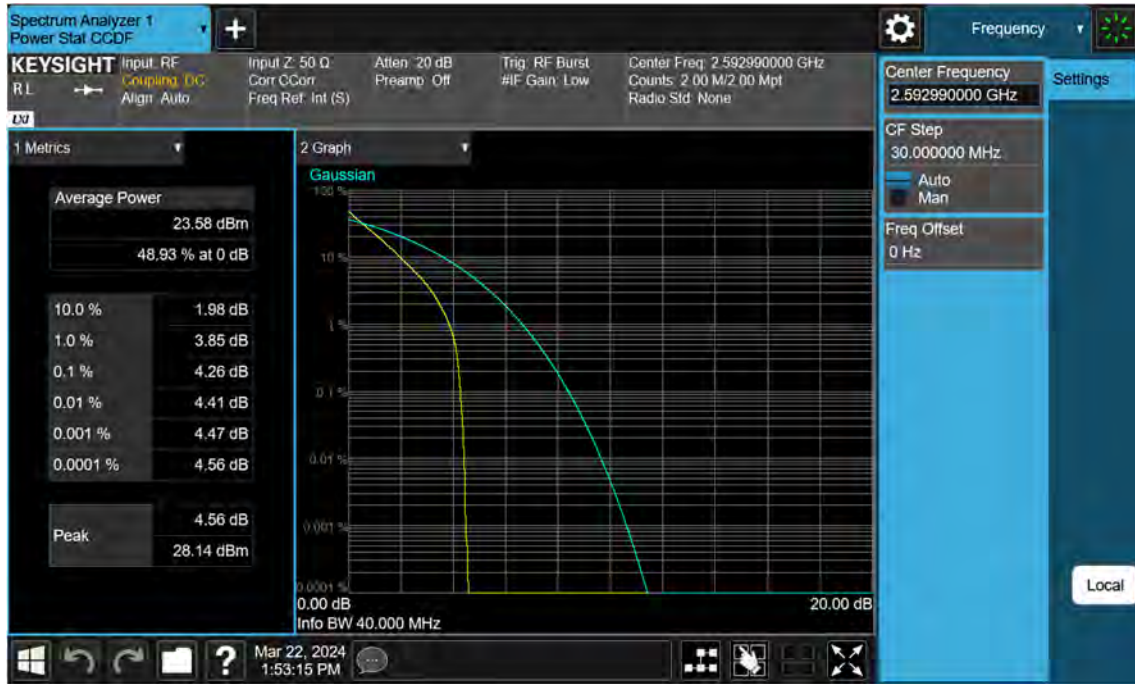

NR41\_40 M\_PAR\_Mid\_QPSK\_FullRB




NR41\_40 M\_PAR\_Mid\_16QAM\_FullRB




NR41\_40 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_40 M\_PAR\_Mid\_256QAM\_FullRB

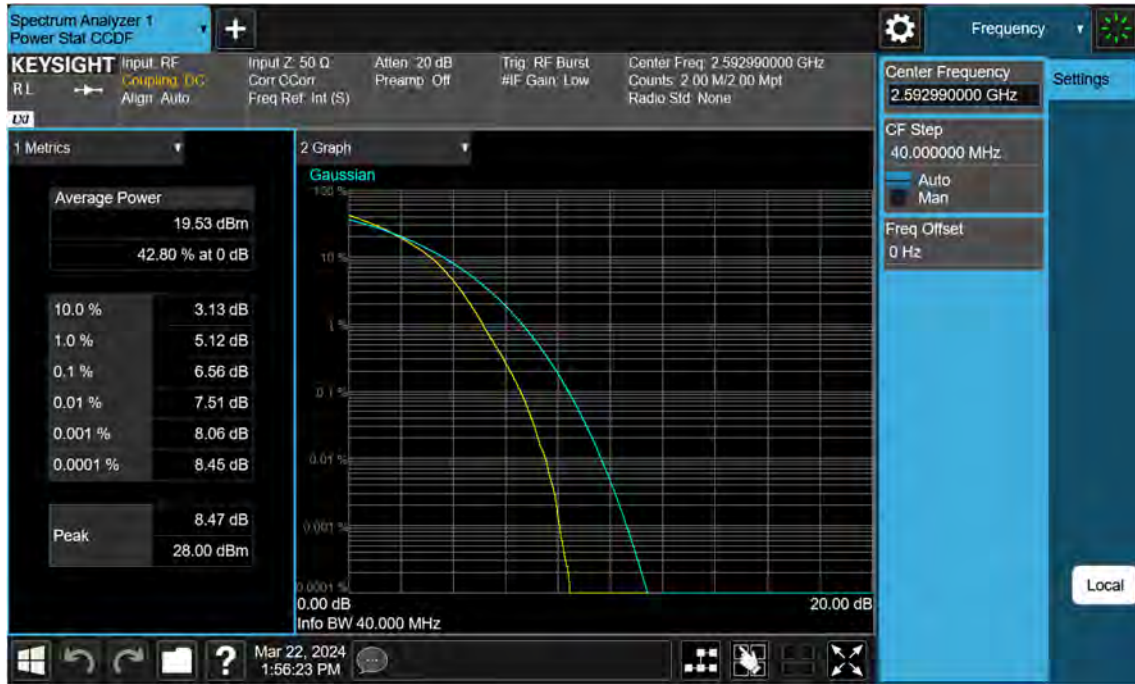

NR41\_50 M\_PAR\_Mid\_BPSK\_FullIRB

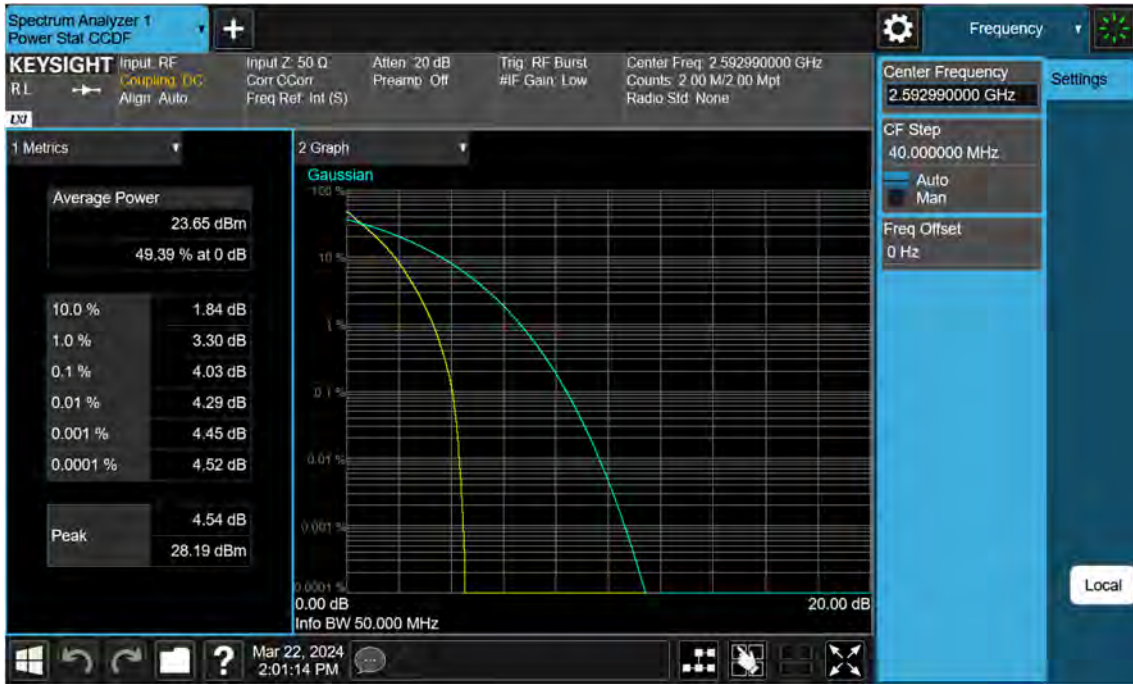



NR41\_50 M\_PAR\_Mid\_QPSK\_FullRB



NR41\_50 M\_PAR\_Mid\_16QAM\_FullRB





NR41\_50 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_50 M\_PAR\_Mid\_256QAM\_FullRB



NR41\_60 M\_PAR\_Mid\_BPSK\_FullIRB



NR41\_60 M\_PAR\_Mid\_QPSK\_FullRB



NR41\_60 M\_PAR\_Mid\_16QAM\_FullRB



NR41\_60 M\_PAR\_Mid\_64QAM\_FullRB






NR41\_60 M\_PAR\_Mid\_256QAM\_FullRB




NR41\_70 M\_PAR\_Mid\_BPSK\_FullIRB

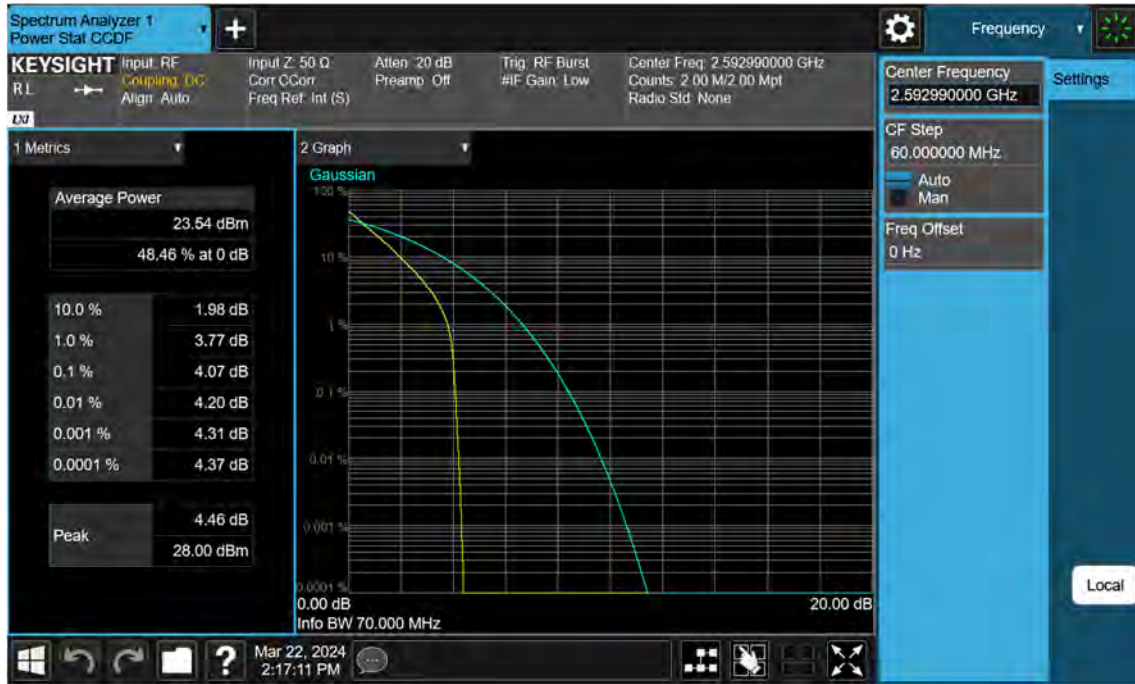



NR41\_70 M\_PAR\_Mid\_QPSK\_FullRB

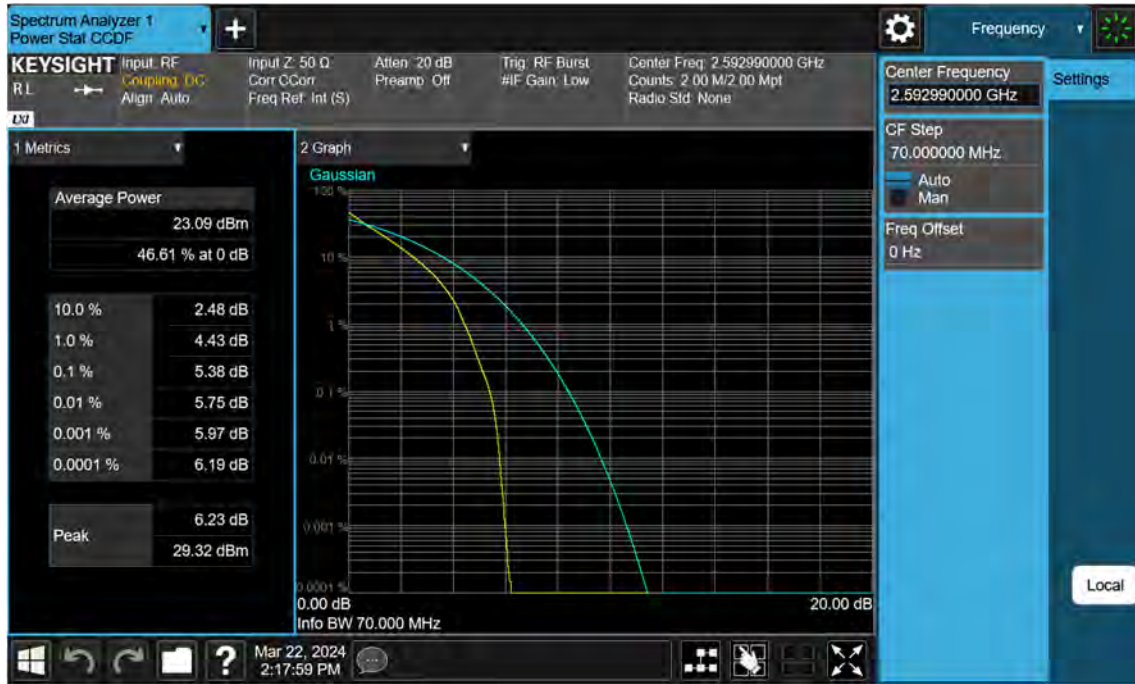


NR41\_70 M\_PAR\_Mid\_16QAM\_FullRB




NR41\_70 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_70 M\_PAR\_Mid\_256QAM\_FullRB

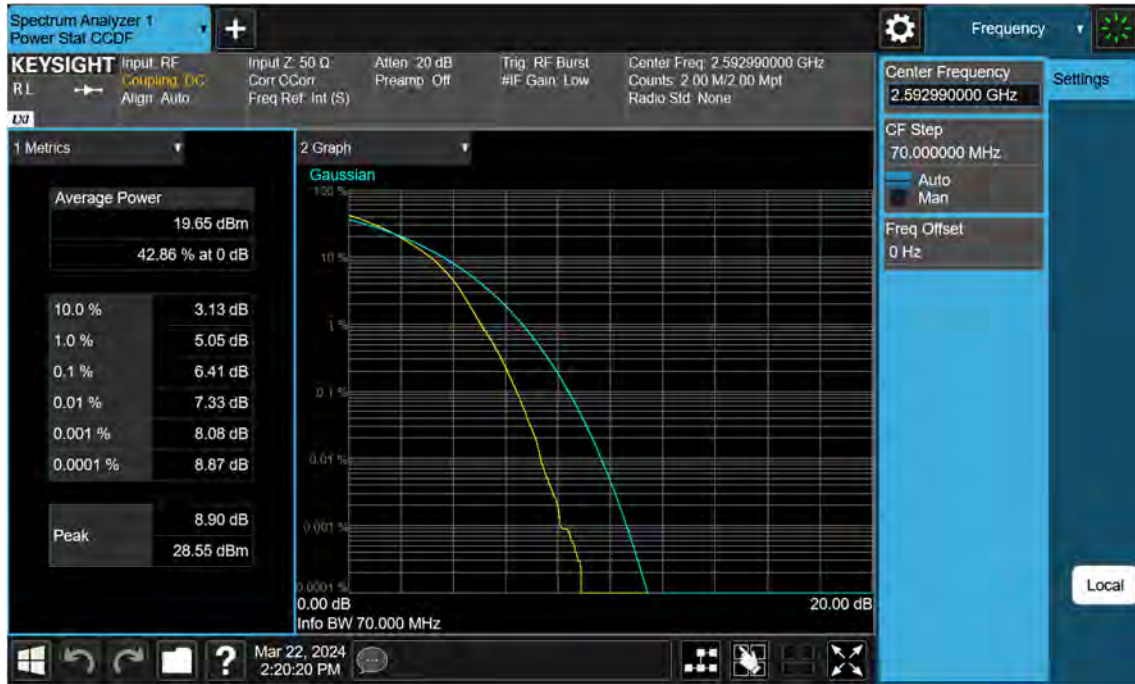

NR41\_80 M\_PAR\_Mid\_BPSK\_FullIRB

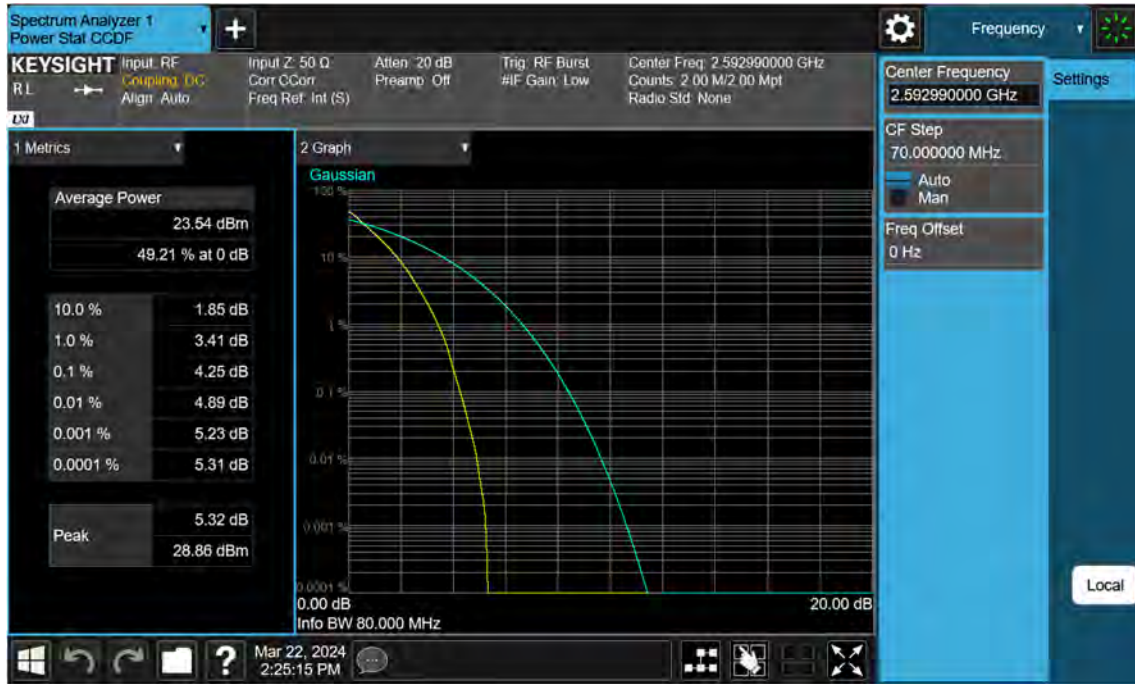

NR41\_80 M\_PAR\_Mid\_QPSK\_FullRB





NR41\_80 M\_PAR\_Mid\_16QAM\_FullRB



NR41\_80 M\_PAR\_Mid\_64QAM\_FullRB







NR41\_80 M\_PAR\_Mid\_256QAM\_FullRB




NR41\_90 M\_PAR\_Mid\_BPSK\_FullIRB

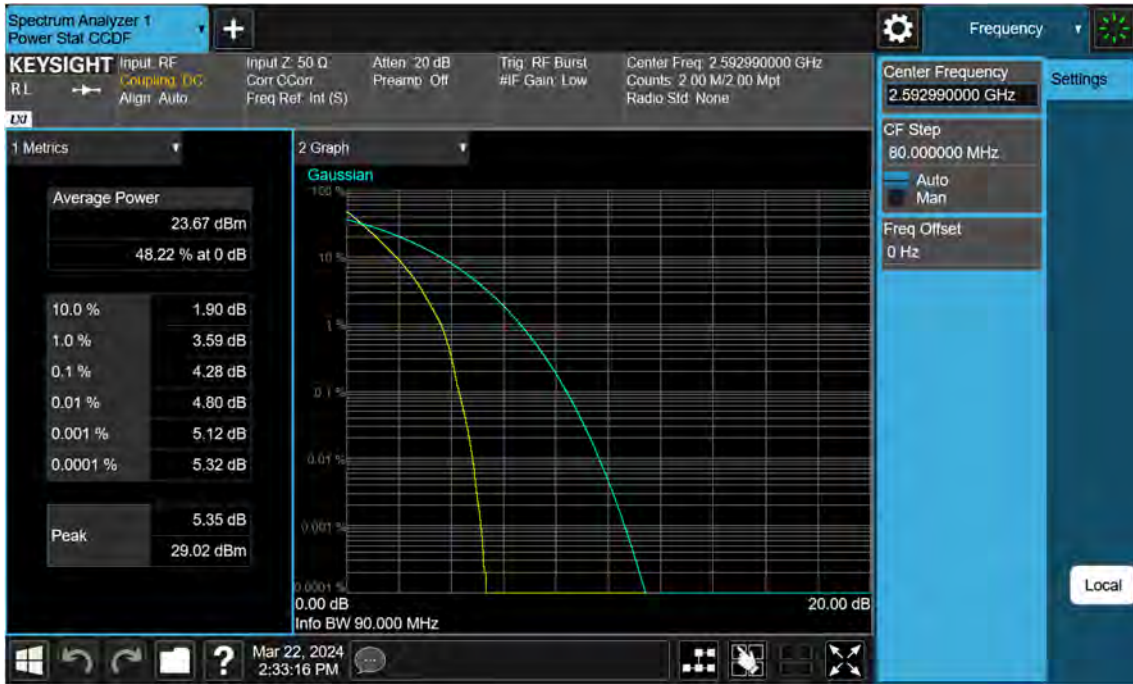

NR41\_90 M\_PAR\_Mid\_QPSK\_FullRB

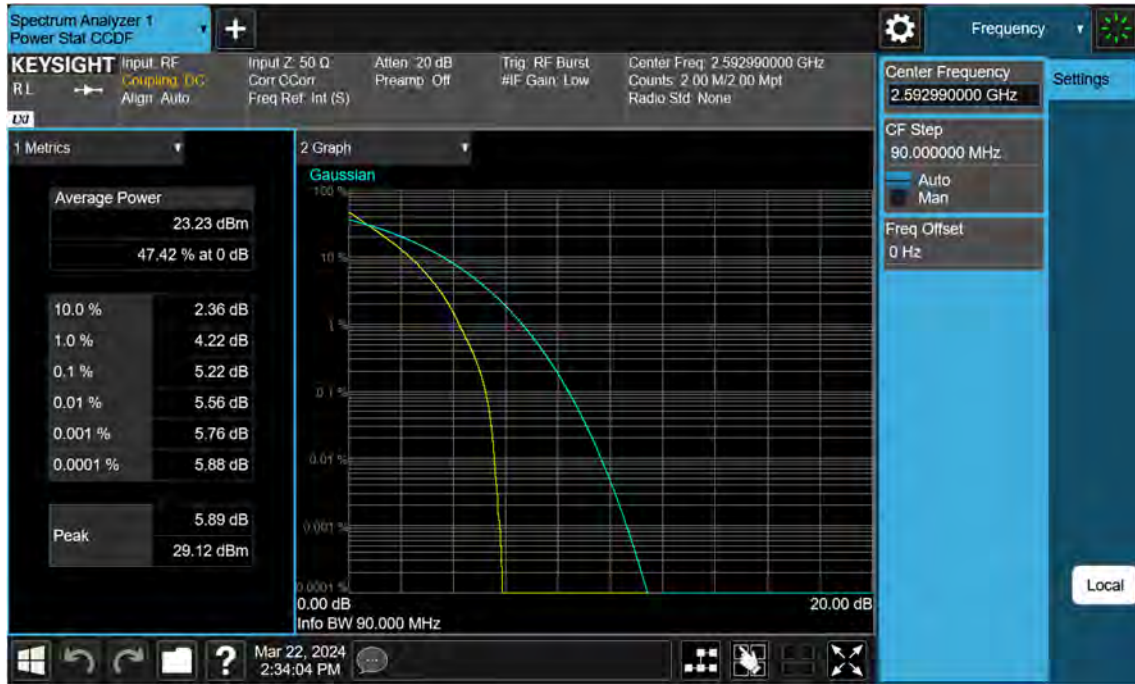

NR41\_90 M\_PAR\_Mid\_16QAM\_FullRB

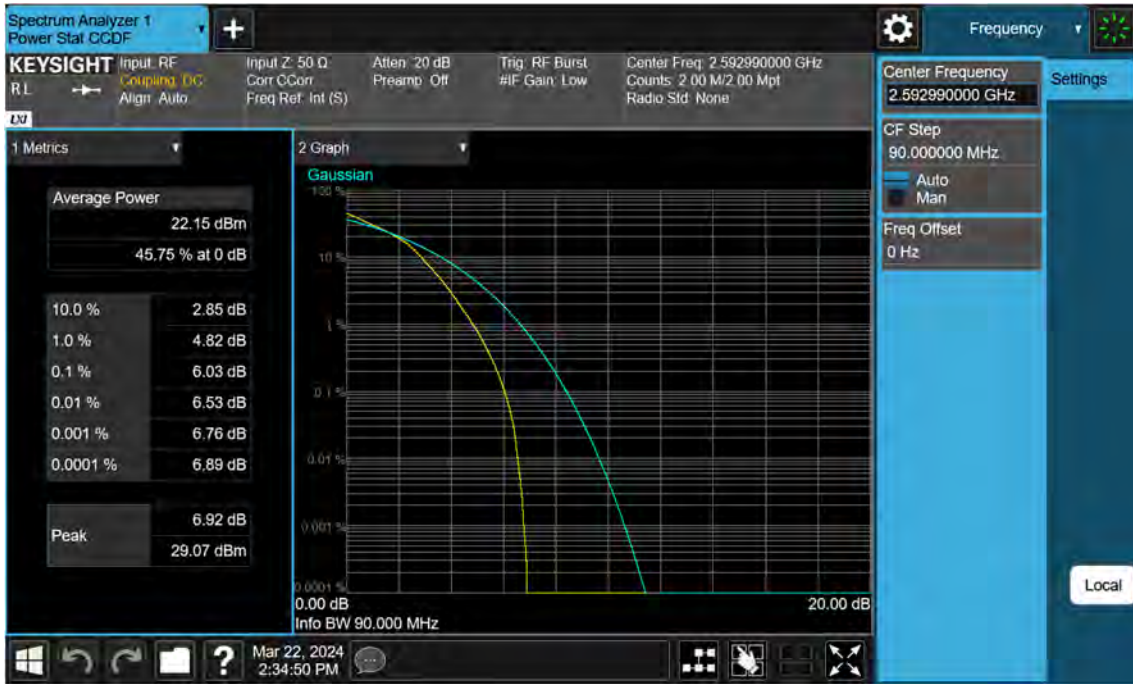

NR41\_90 M\_PAR\_Mid\_64QAM\_FullRB



NR41\_90 M\_PAR\_Mid\_256QAM\_FullRB





NR41\_100 M\_PAR\_Mid\_BPSK\_FullRB



NR41\_100 M\_PAR\_Mid\_QPSK\_FullRB





NR41\_100 M\_PAR\_Mid\_16QAM\_FullRB



NR41\_100 M\_PAR\_Mid\_64QAM\_FullRB




NR41\_100 M\_PAR\_Mid\_256QAM\_FullRB



NR41\_10 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_10 M\_OBW\_Mid\_QPSK\_FullRB

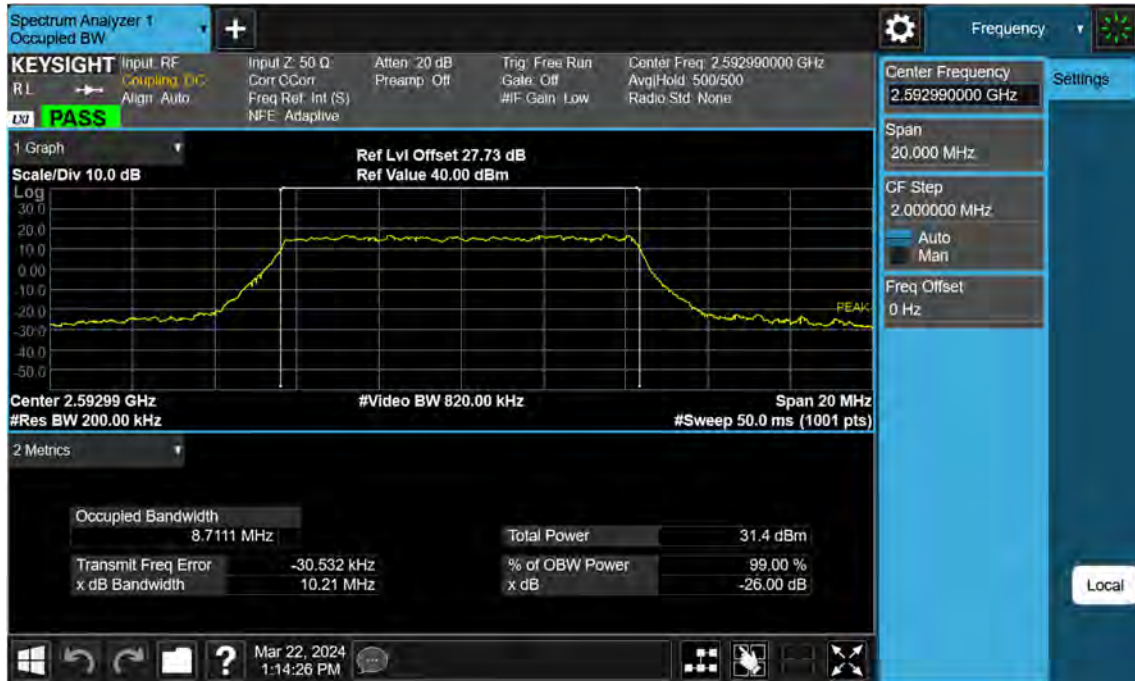

NR41\_10 M\_OBW\_Mid\_16QAM\_FullRB






NR41\_10 M\_OBW\_Mid\_64QAM\_FullRB



NR41\_10 M\_OBW\_Mid\_256QAM\_FullRB

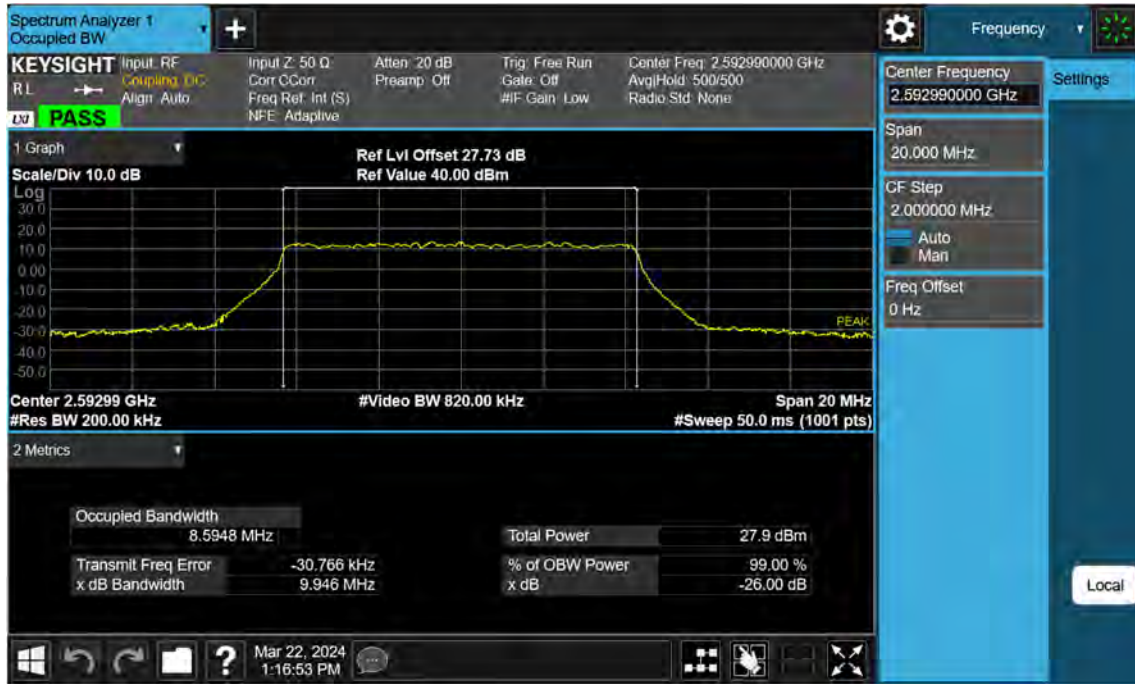




NR41\_15 M\_OBW\_Mid\_BPSK\_FullRB




NR41\_15 M\_OBW\_Mid\_QPSK\_FullRB



NR41\_15 M\_OBW\_Mid\_16QAM\_FullRB

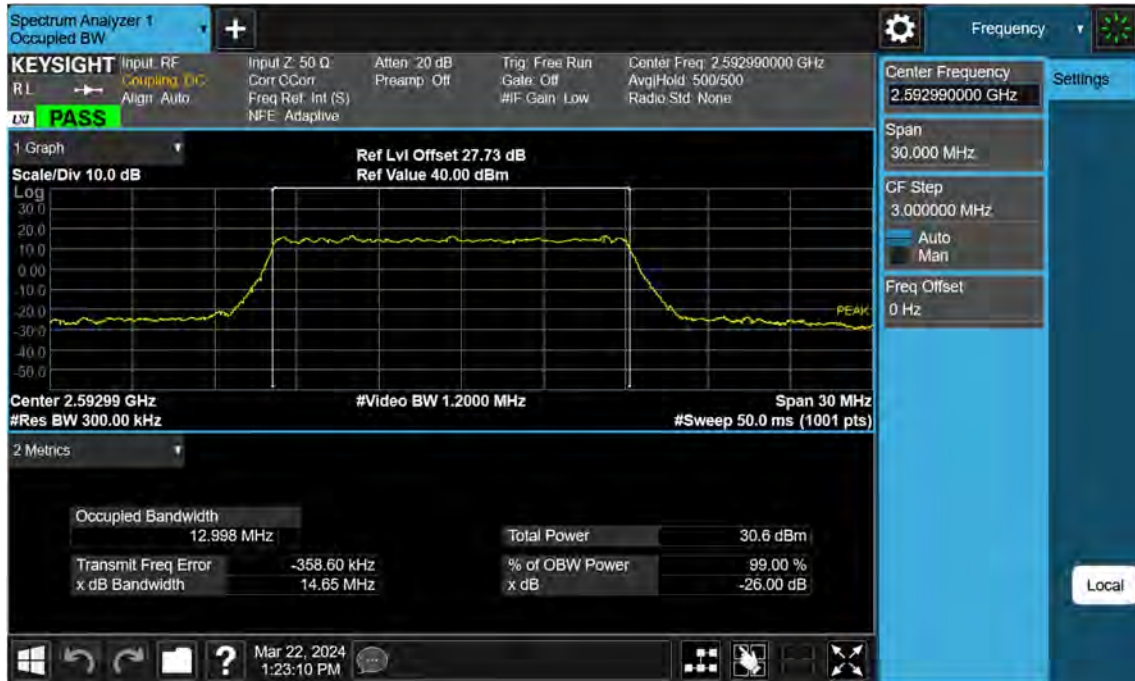


NR41\_15 M\_OBW\_Mid\_64QAM\_FullRB

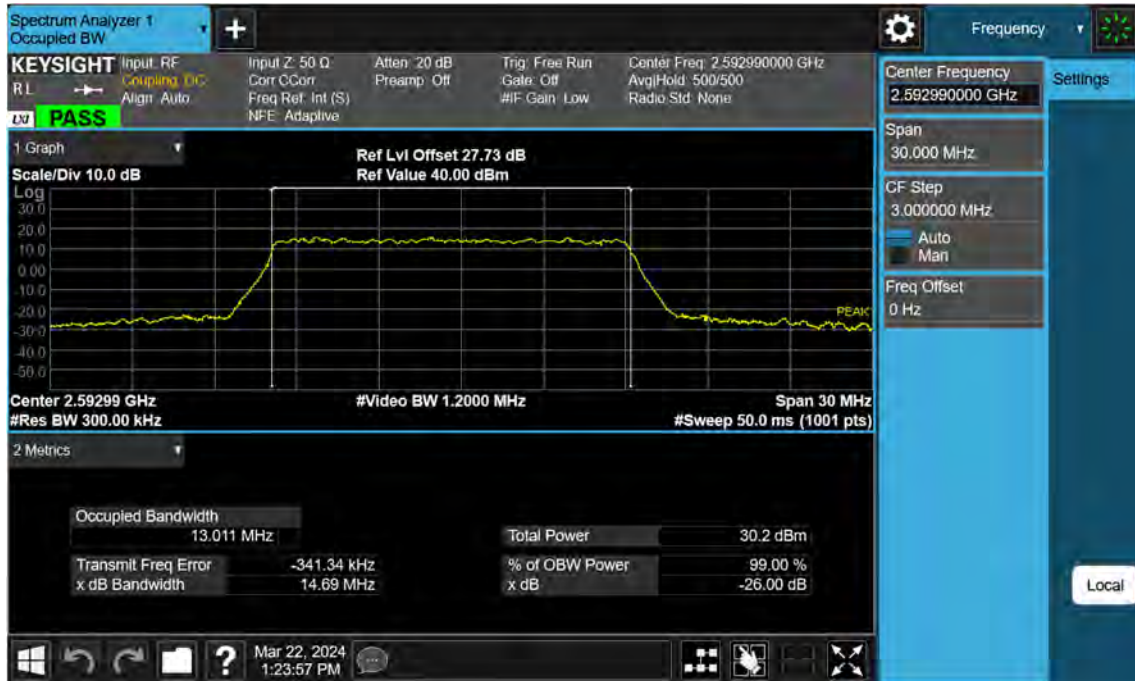

NR41\_15 M\_OBW\_Mid\_256QAM\_FullRB



NR41\_20 M\_OBW\_Mid\_BPSK\_FullRB

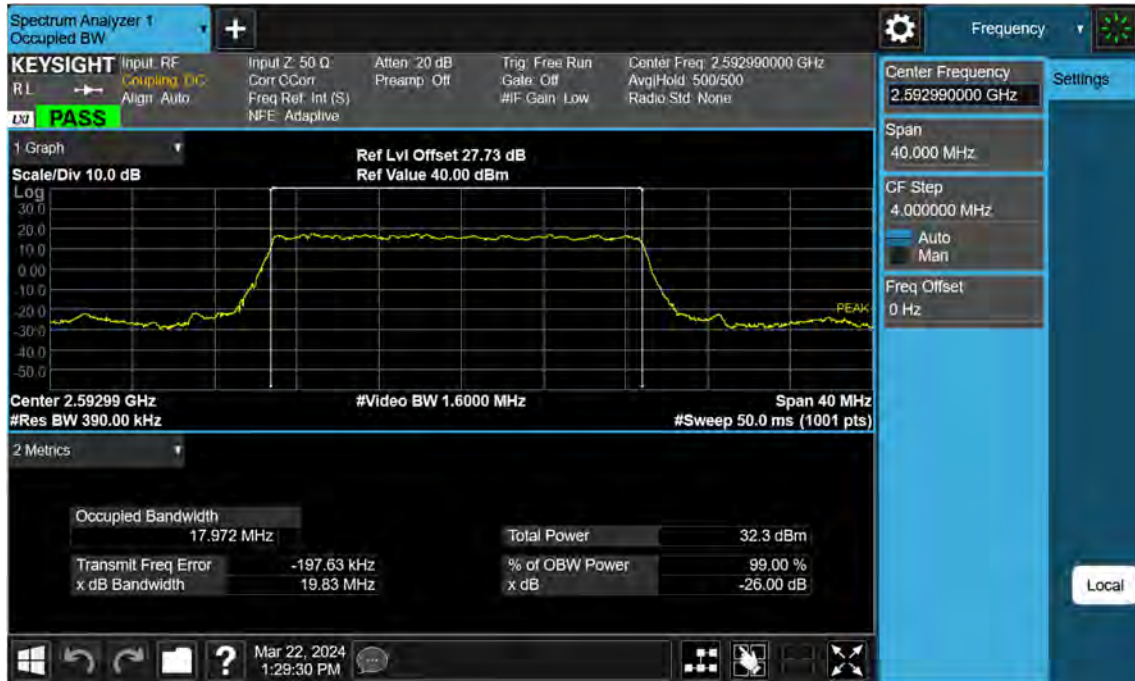



NR41\_20 M\_OBW\_Mid\_QPSK\_FullRB



NR41\_20 M\_OBW\_Mid\_16QAM\_FullRB





NR41\_20 M\_OBW\_Mid\_64QAM\_FullRB



NR41\_20 M\_OBW\_Mid\_256QAM\_FullRB




NR41\_25 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_25 M\_OBW\_Mid\_QPSK\_FullRB



NR41\_25 M\_OBW\_Mid\_16QAM\_FullRB

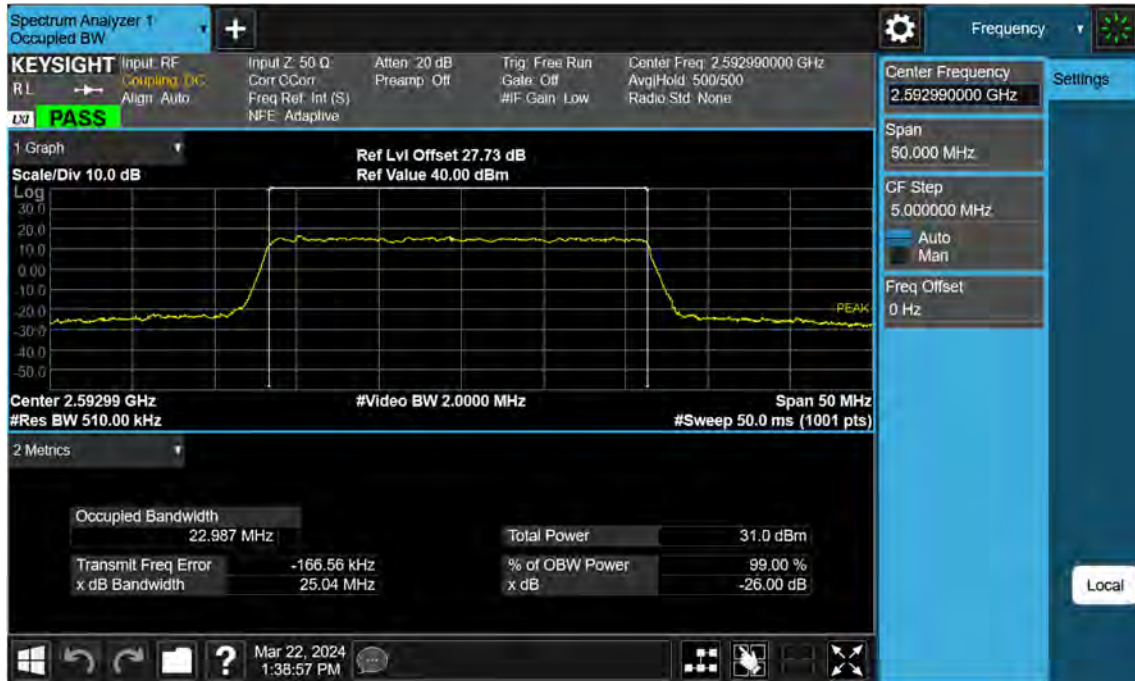

NR41\_25 M\_OBW\_Mid\_64QAM\_FullRB






NR41\_25 M\_OBW\_Mid\_256QAM\_FullRB



NR41\_30 M\_OBW\_Mid\_BPSK\_FullRB

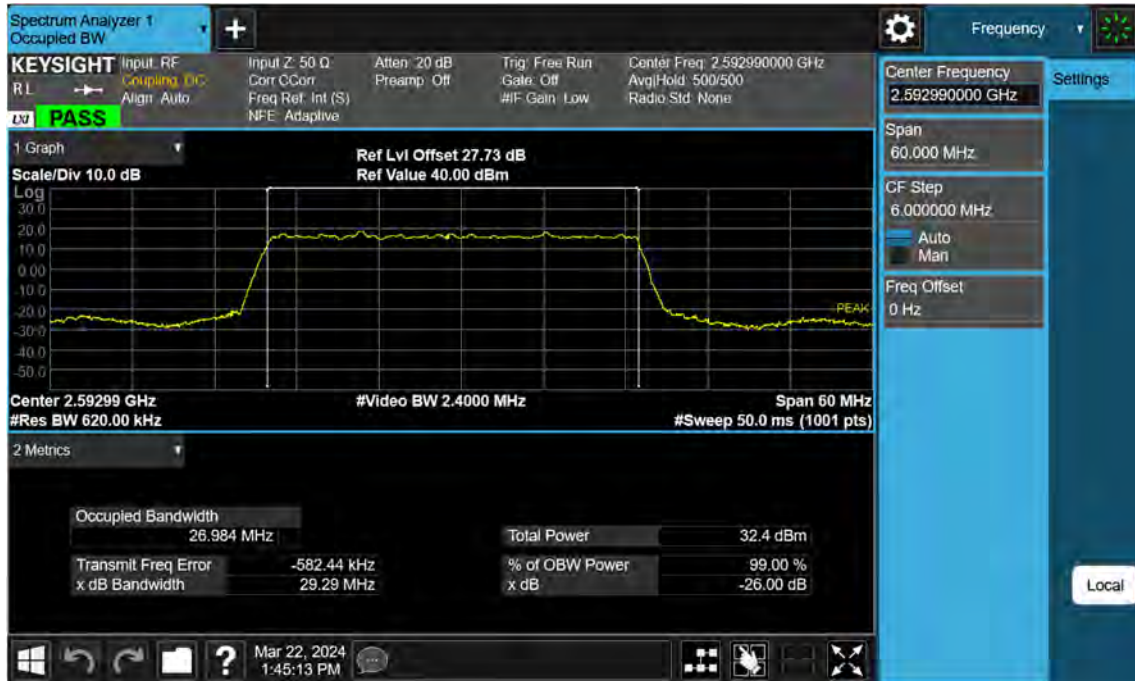




NR41\_30 M\_OBW\_Mid\_QPSK\_FullRB



NR41\_30 M\_OBW\_Mid\_16QAM\_FullRB

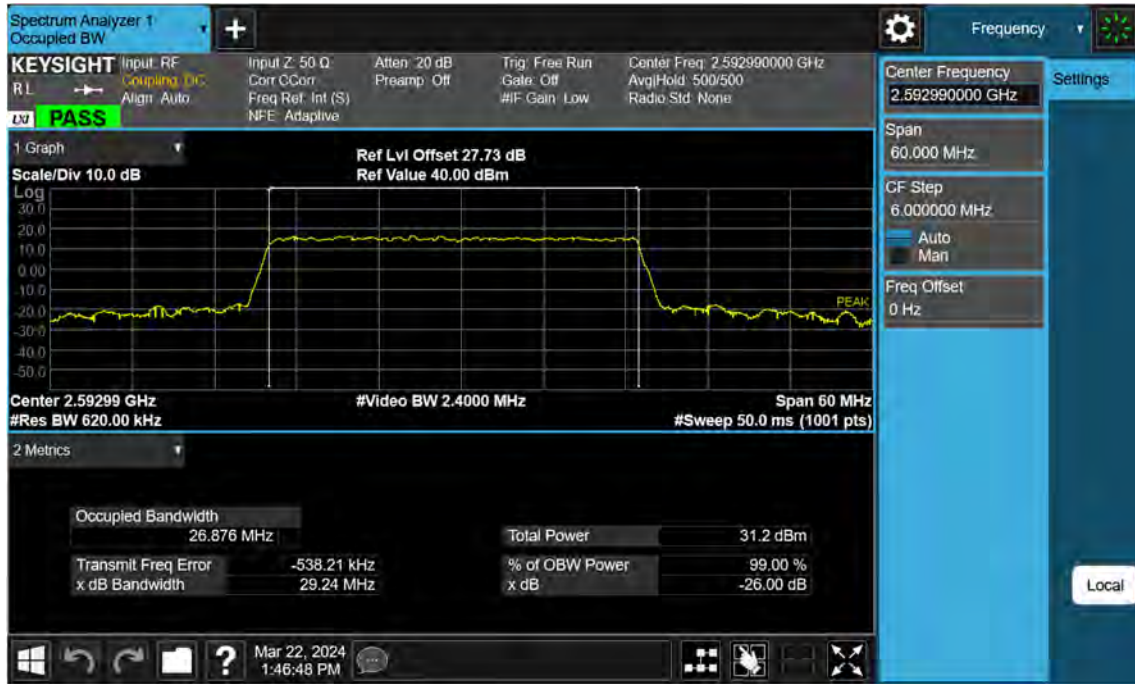

NR41\_30 M\_OBW\_Mid\_64QAM\_FullRB



NR41\_30 M\_OBW\_Mid\_256QAM\_FullRB



NR41\_40 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_40 M\_OBW\_Mid\_QPSK\_FullRB






NR41\_40 M\_OBW\_Mid\_16QAM\_FullRB



NR41\_40 M\_OBW\_Mid\_64QAM\_FullRB

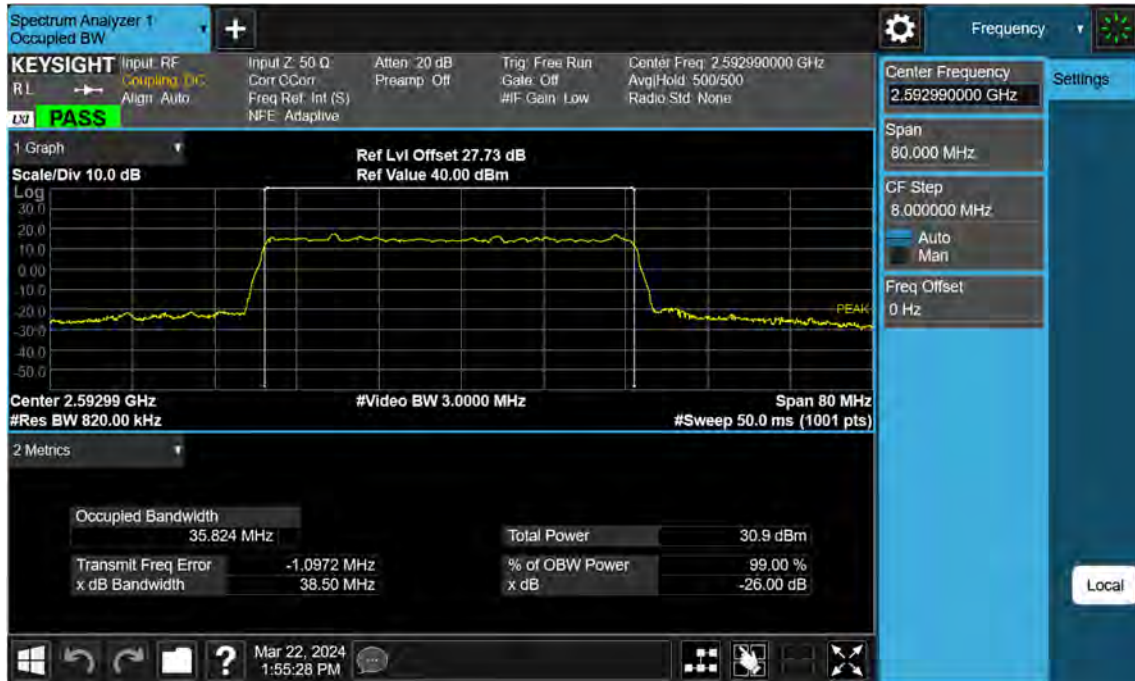




NR41\_40 M\_OBW\_Mid\_256QAM\_FullRB




NR41\_50 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_50 M\_OBW\_Mid\_QPSK\_FullRB

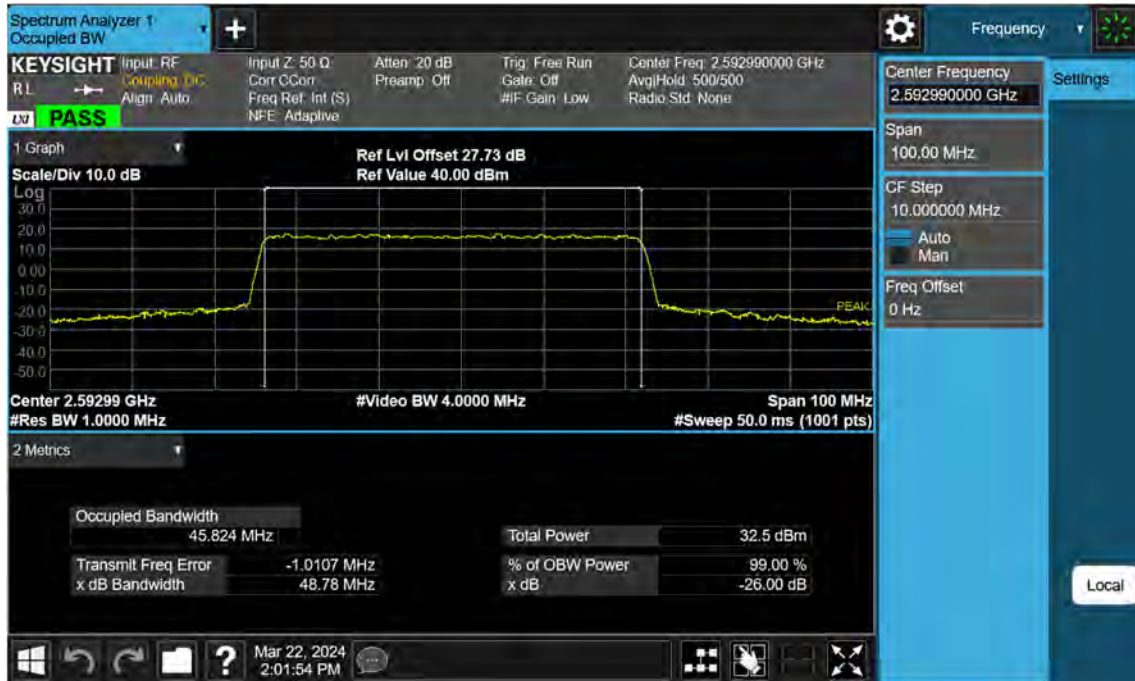

NR41\_50 M\_OBW\_Mid\_16QAM\_FullRB

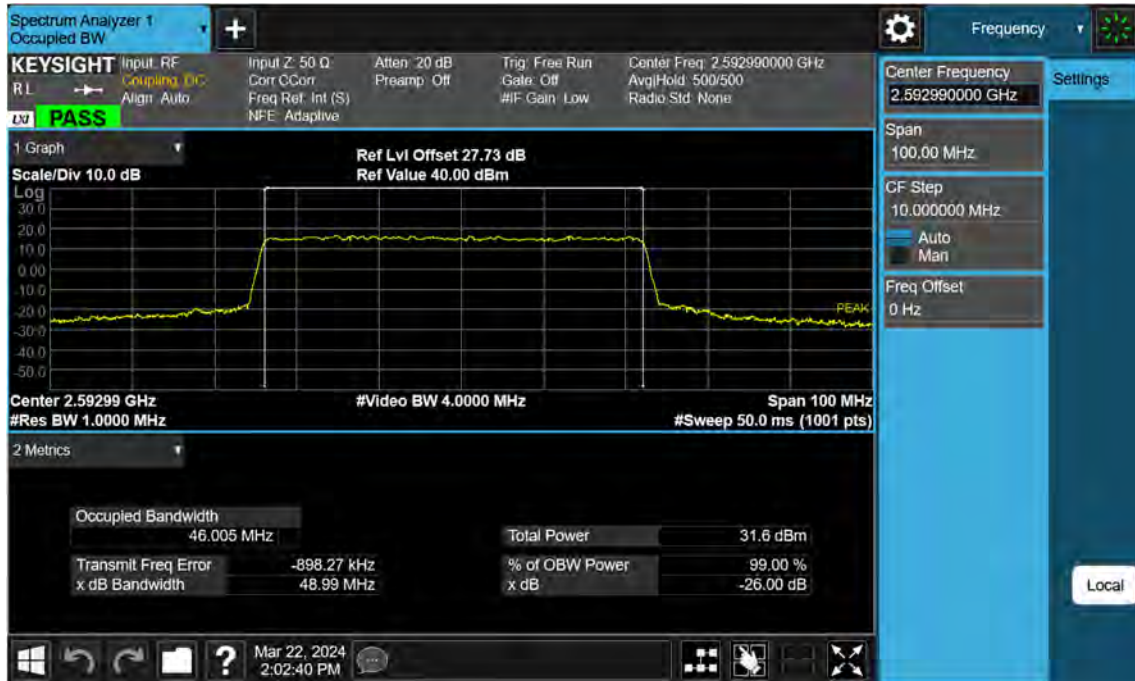

NR41\_50 M\_OBW\_Mid\_64QAM\_FullRB




NR41\_50 M\_OBW\_Mid\_256QAM\_FullRB





NR41\_60 M\_OBW\_Mid\_BPSK\_FullRB

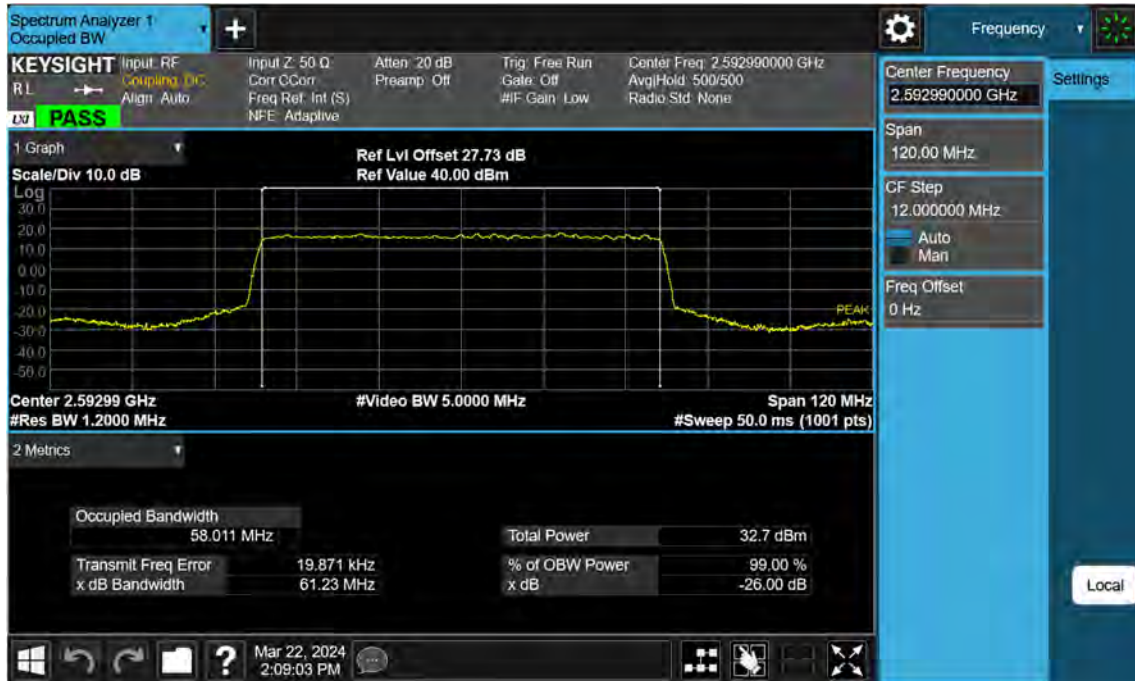


NR41\_60 M\_OBW\_Mid\_QPSK\_FullRB






NR41\_60 M\_OBW\_Mid\_16QAM\_FullRB

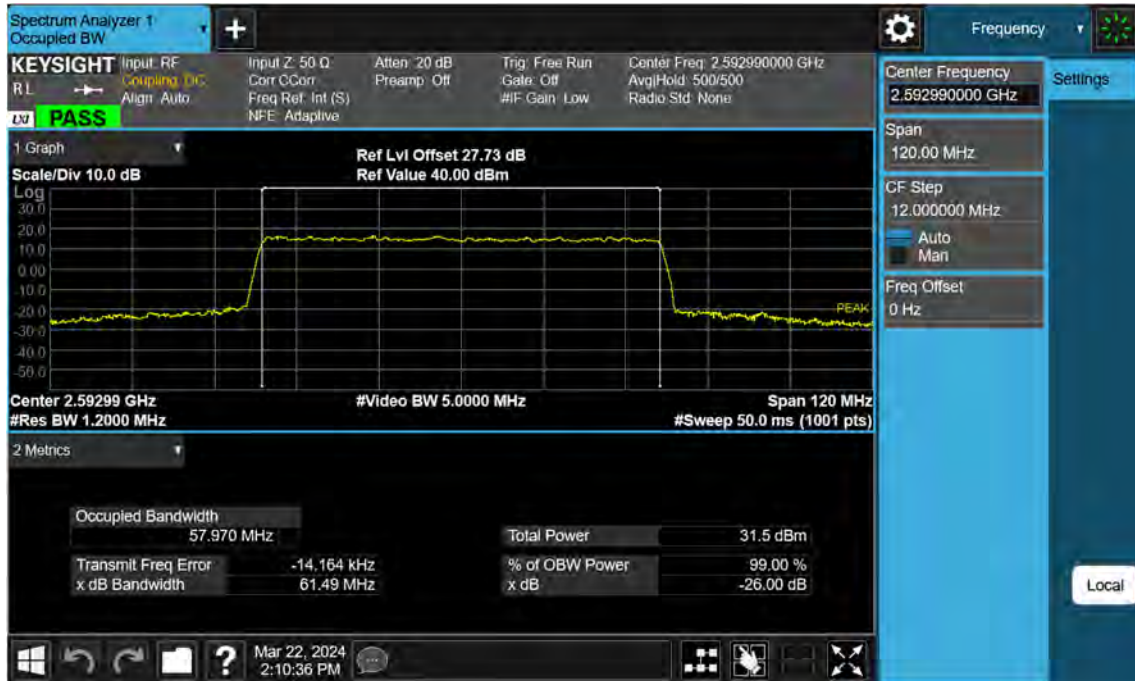

NR41\_60 M\_OBW\_Mid\_64QAM\_FullRB

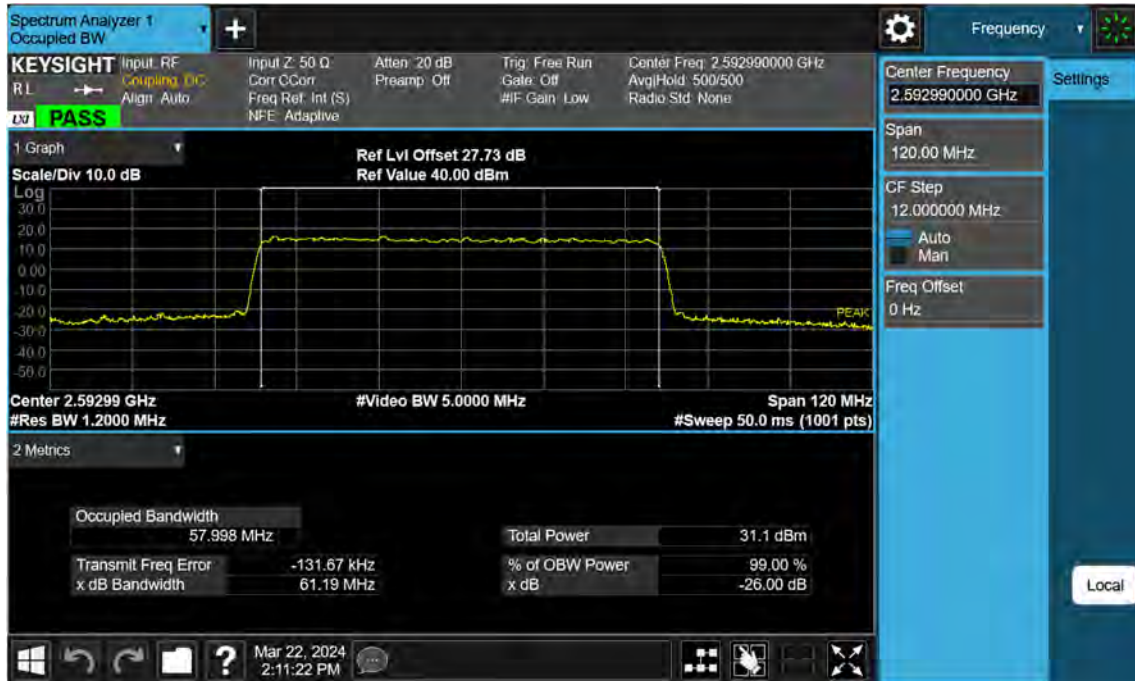

NR41\_60 M\_OBW\_Mid\_256QAM\_FullRB



NR41\_70 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_70 M\_OBW\_Mid\_QPSK\_FullRB



NR41\_70 M\_OBW\_Mid\_16QAM\_FullRB






NR41\_70 M\_OBW\_Mid\_64QAM\_FullRB






NR41\_70 M\_OBW\_Mid\_256QAM\_FullRB

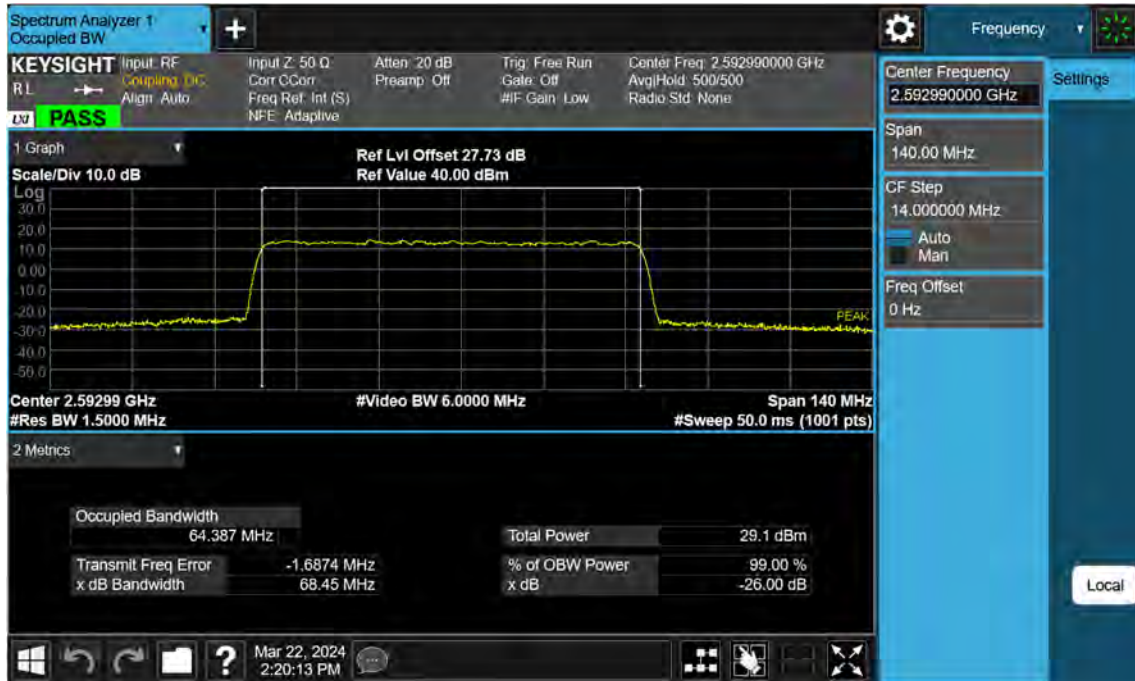


NR41\_80 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_80 M\_OBW\_Mid\_QPSK\_FullRB

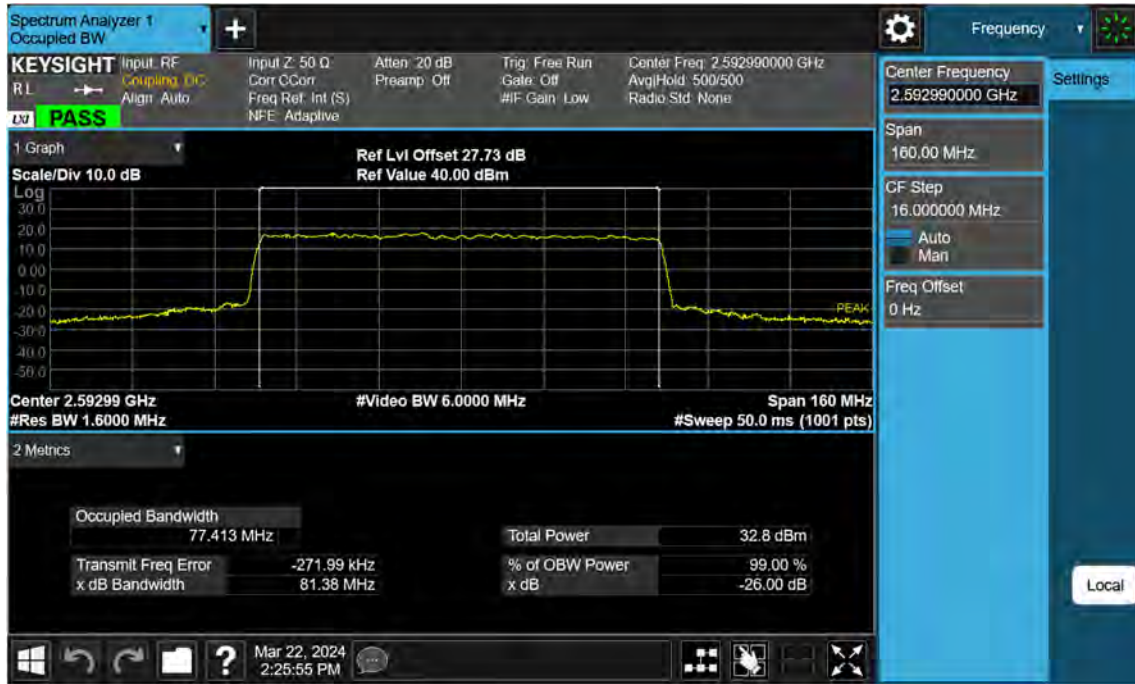


NR41\_80 M\_OBW\_Mid\_16QAM\_FullRB

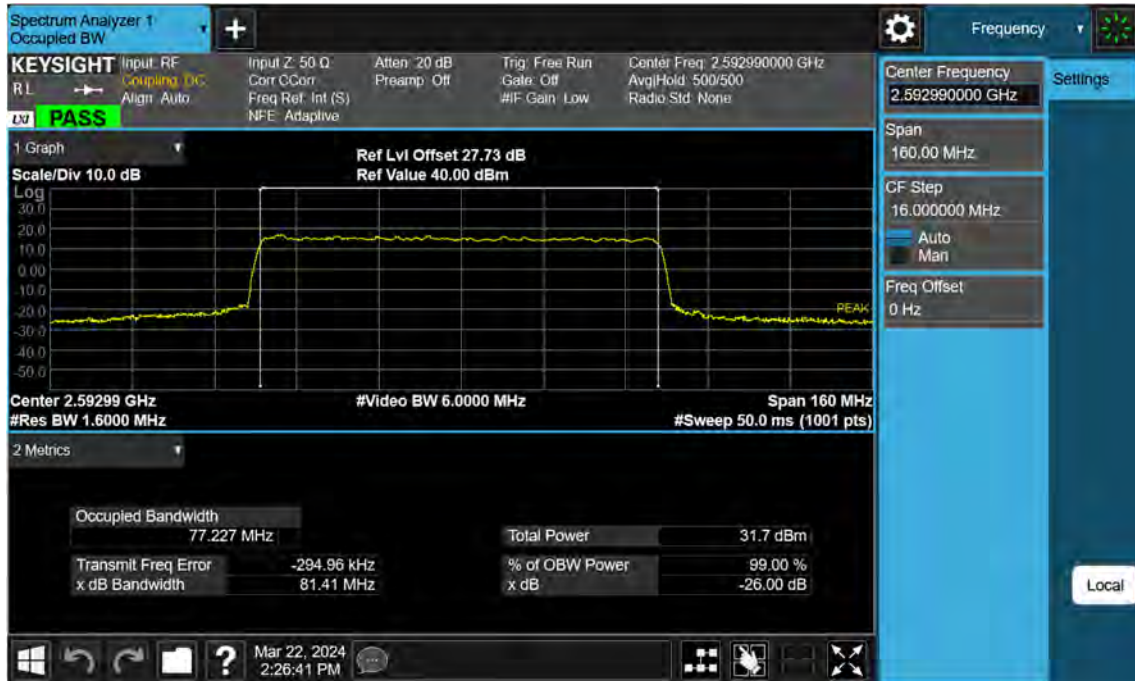

NR41\_80 M\_OBW\_Mid\_64QAM\_FullRB



NR41\_80 M\_OBW\_Mid\_256QAM\_FullRB

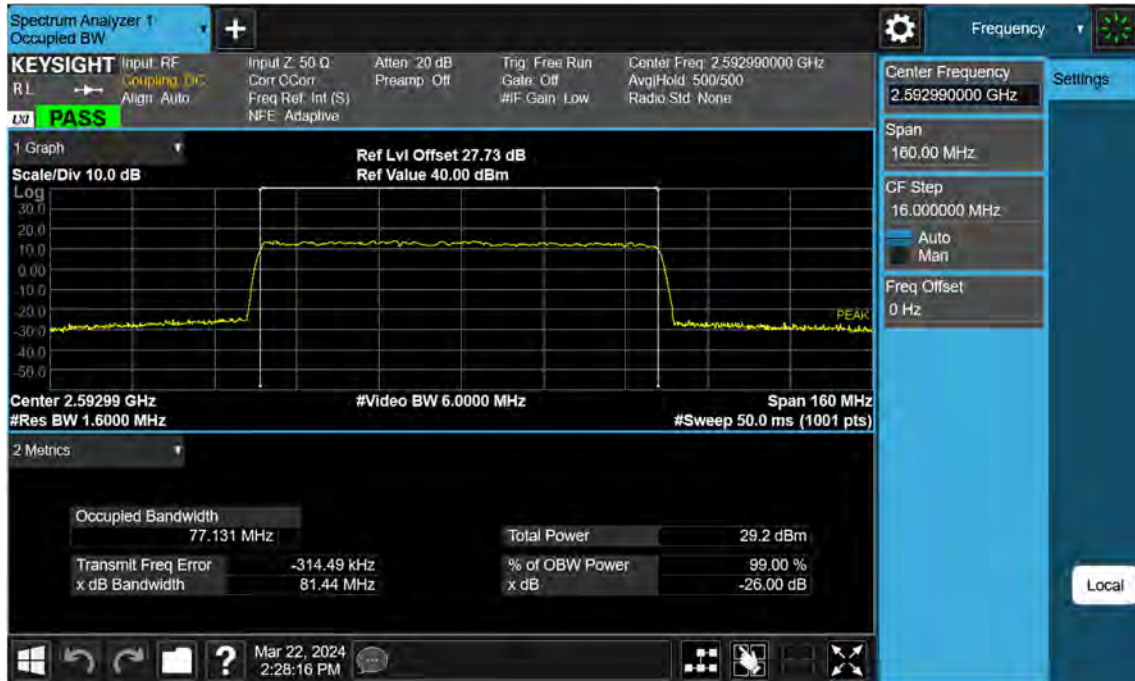



NR41\_90 M\_OBW\_Mid\_BPSK\_FullRB





NR41\_90 M\_OBW\_Mid\_QPSK\_FullRB




NR41\_90 M\_OBW\_Mid\_16QAM\_FullRB



NR41\_90 M\_OBW\_Mid\_64QAM\_FullRB



NR41\_90 M\_OBW\_Mid\_256QAM\_FullRB

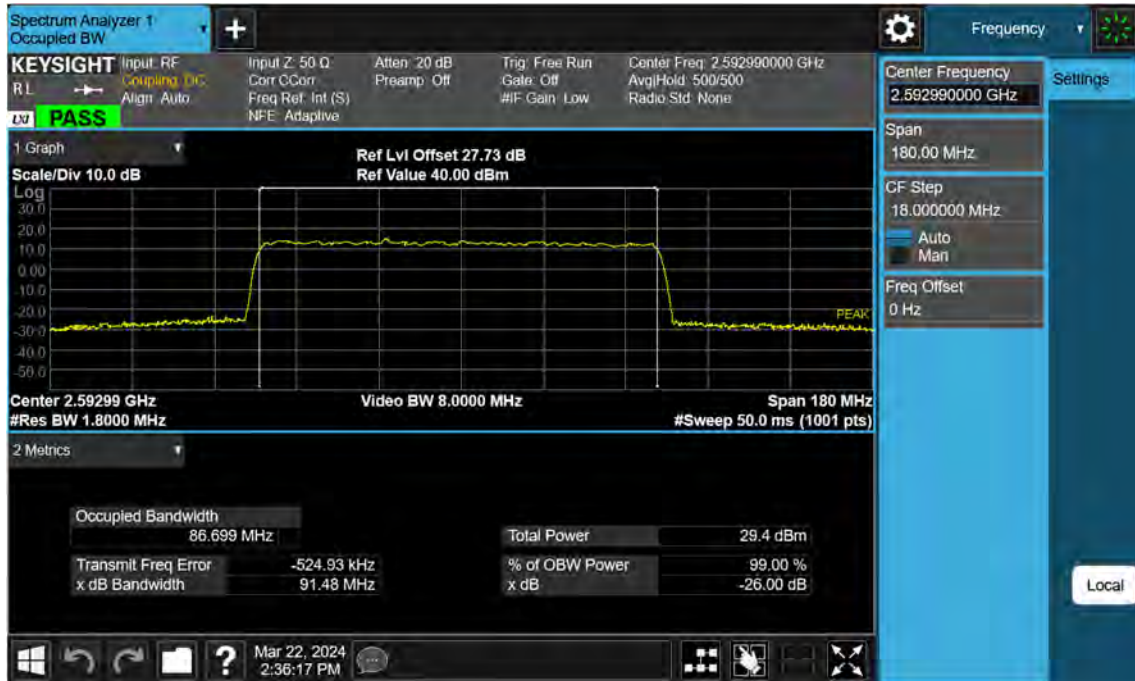

NR41\_100 M\_OBW\_Mid\_BPSK\_FullRB



NR41\_100 M\_OBW\_Mid\_QPSK\_FullIRB






NR41\_100 M\_OBW\_Mid\_16QAM\_FullRB






NR41\_100 M\_OBW\_Mid\_64QAM\_FullRB

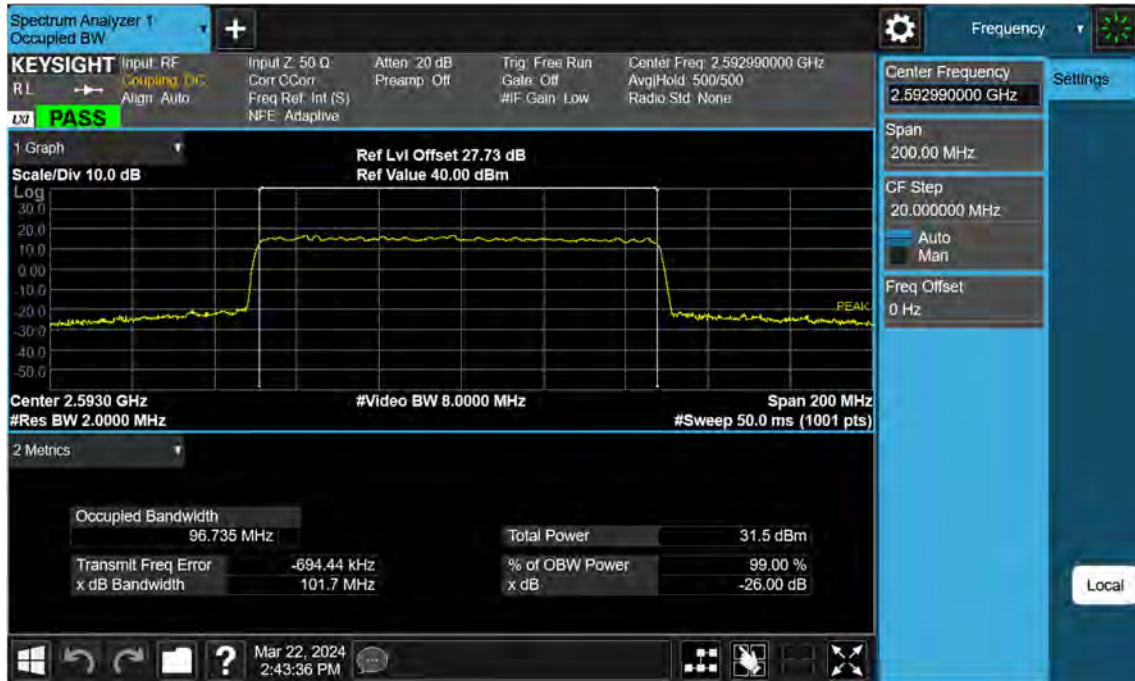


NR41\_100 M\_OBW\_Mid\_256QAM\_FullRB




NR41\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

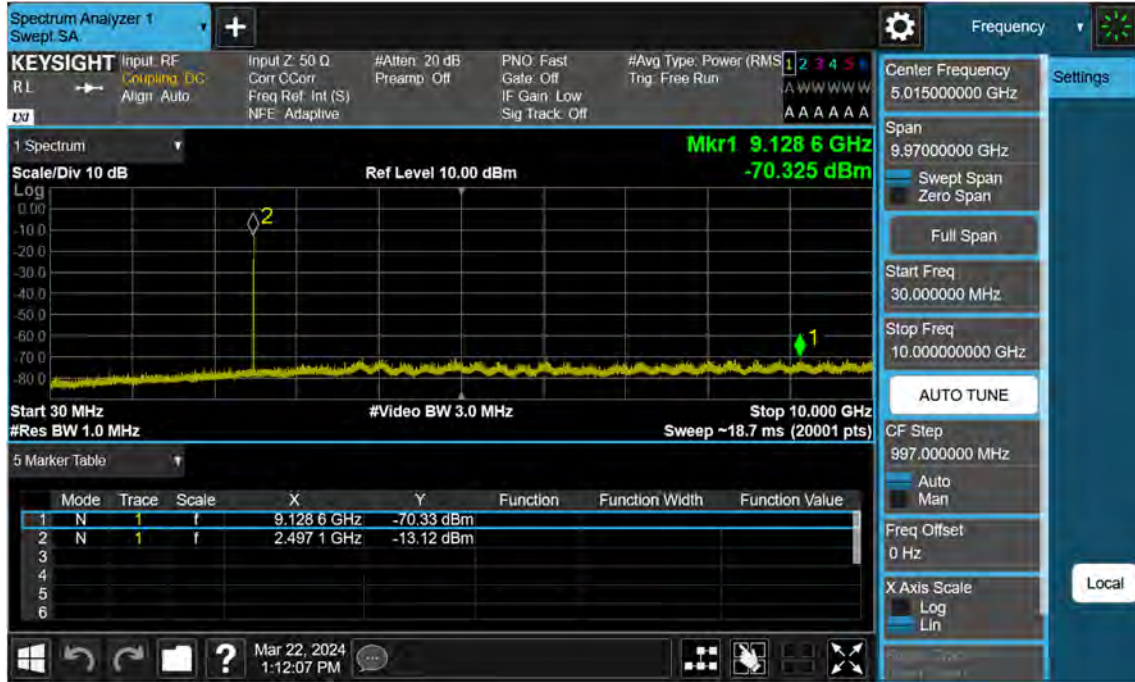

NR41\_10 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

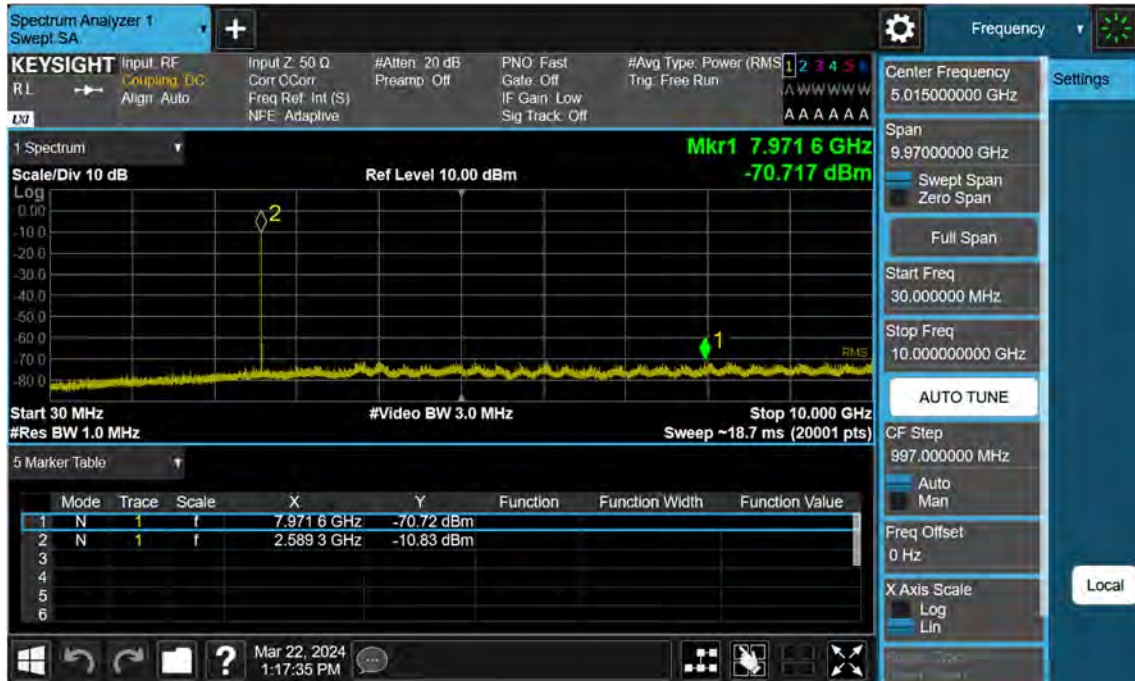


NR41\_10 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

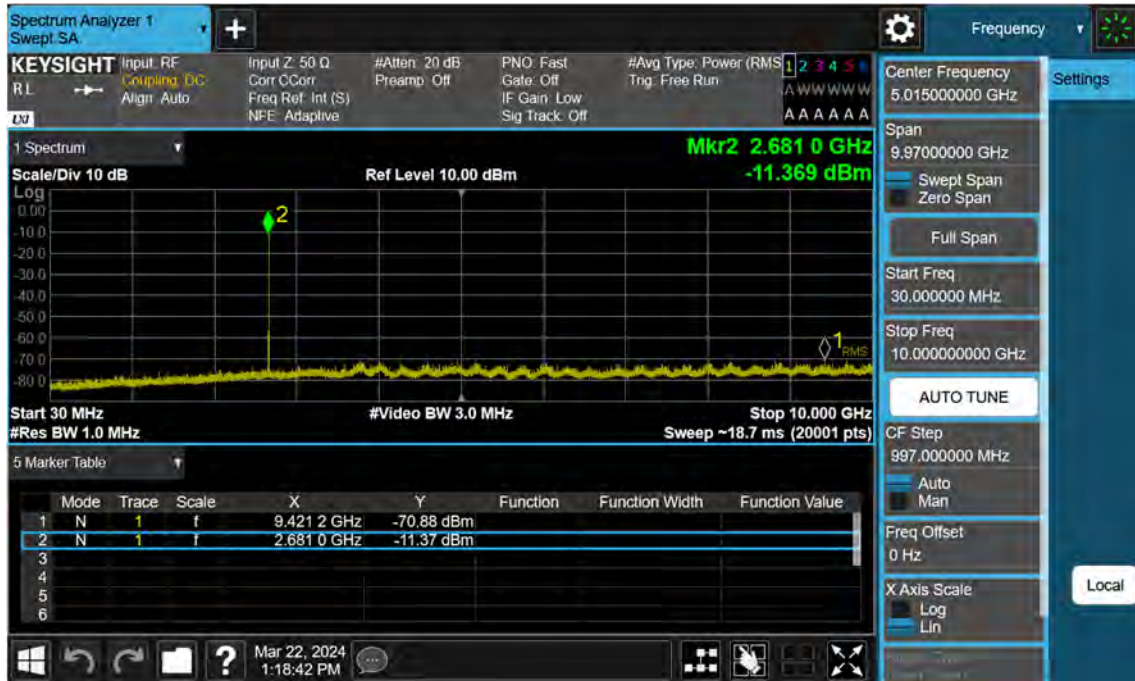




NR41\_15 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

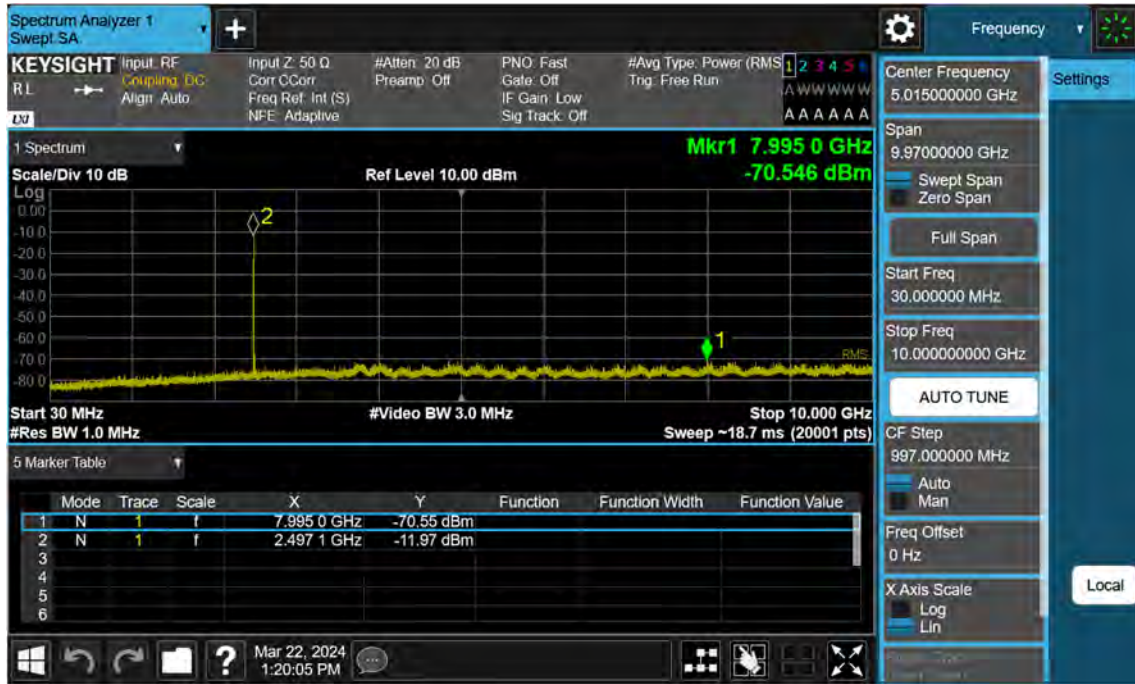


NR41\_15 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullIRB

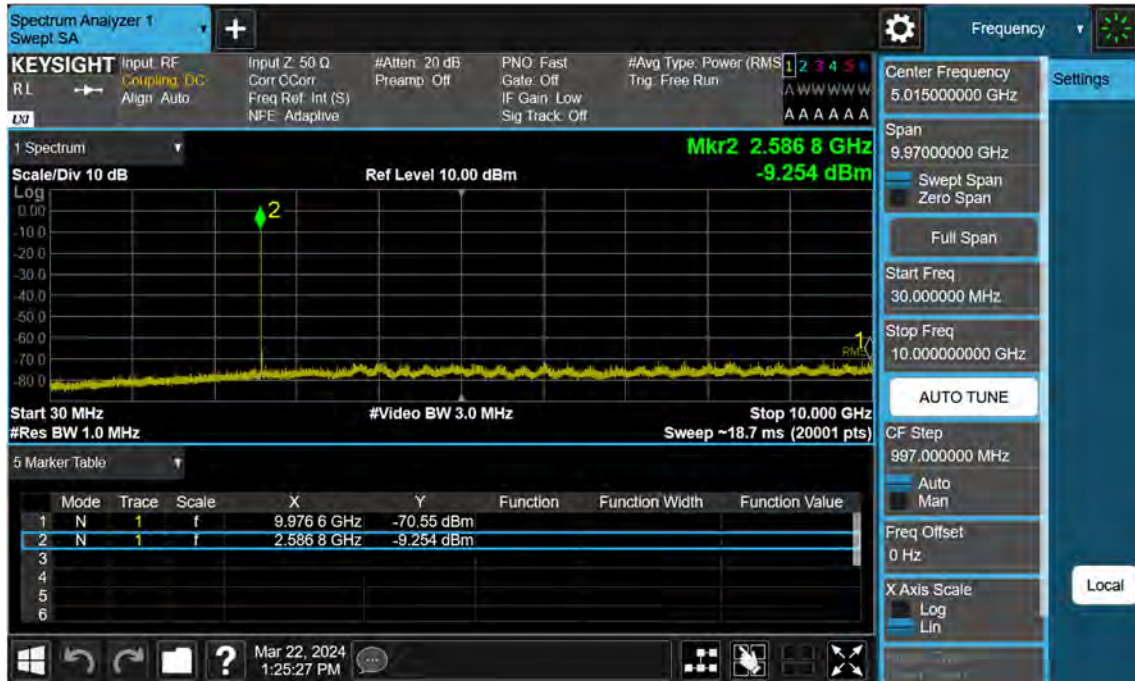




NR41\_15 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

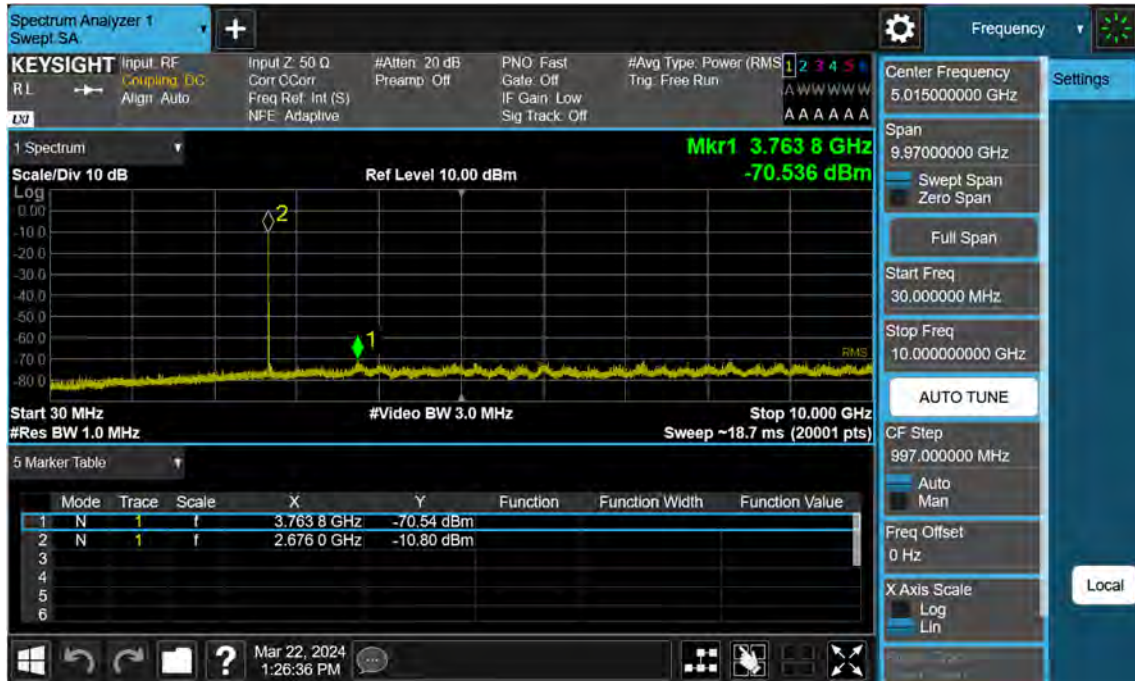


NR41\_20 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB




NR41\_20 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

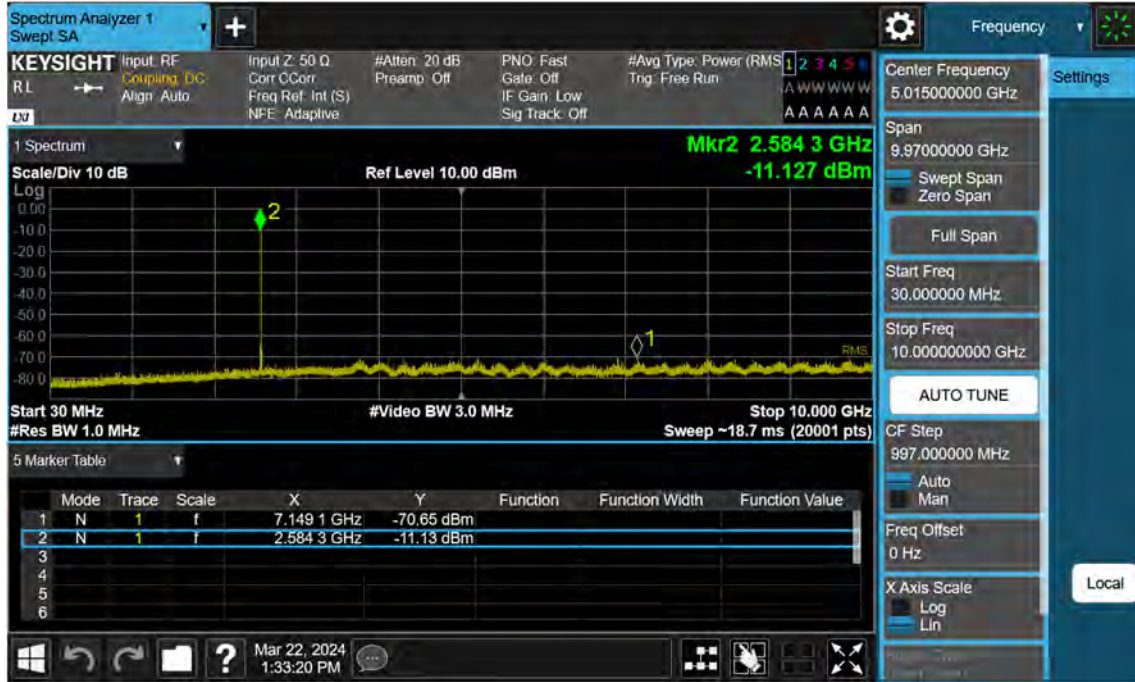

NR41\_20 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

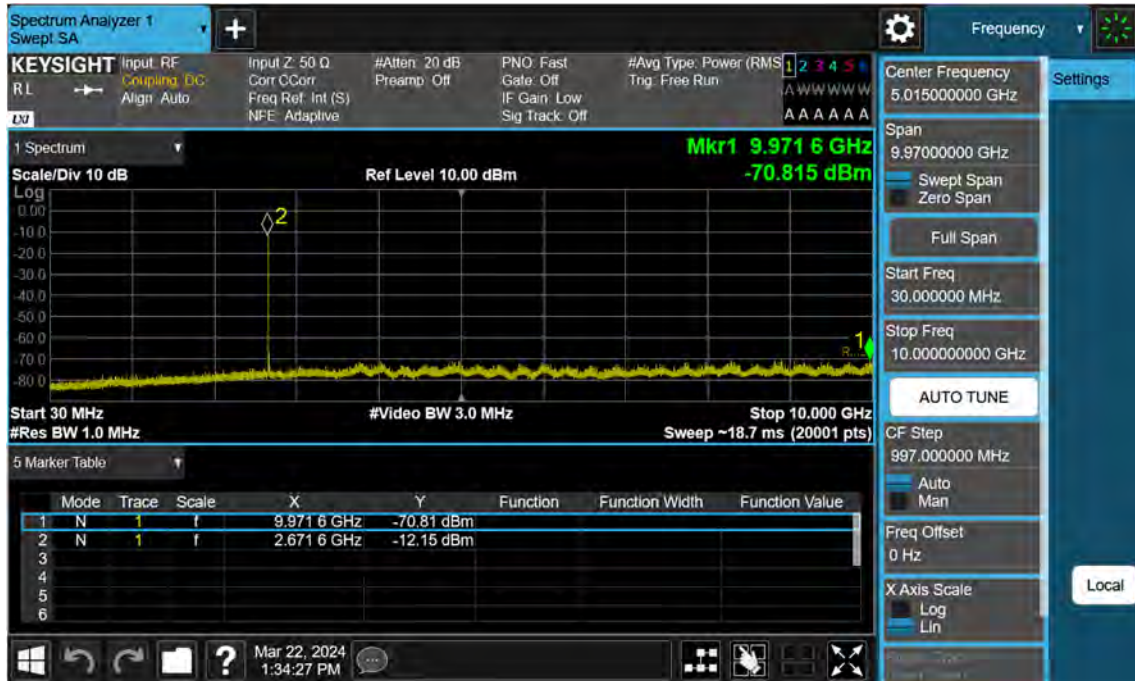


NR41\_25 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

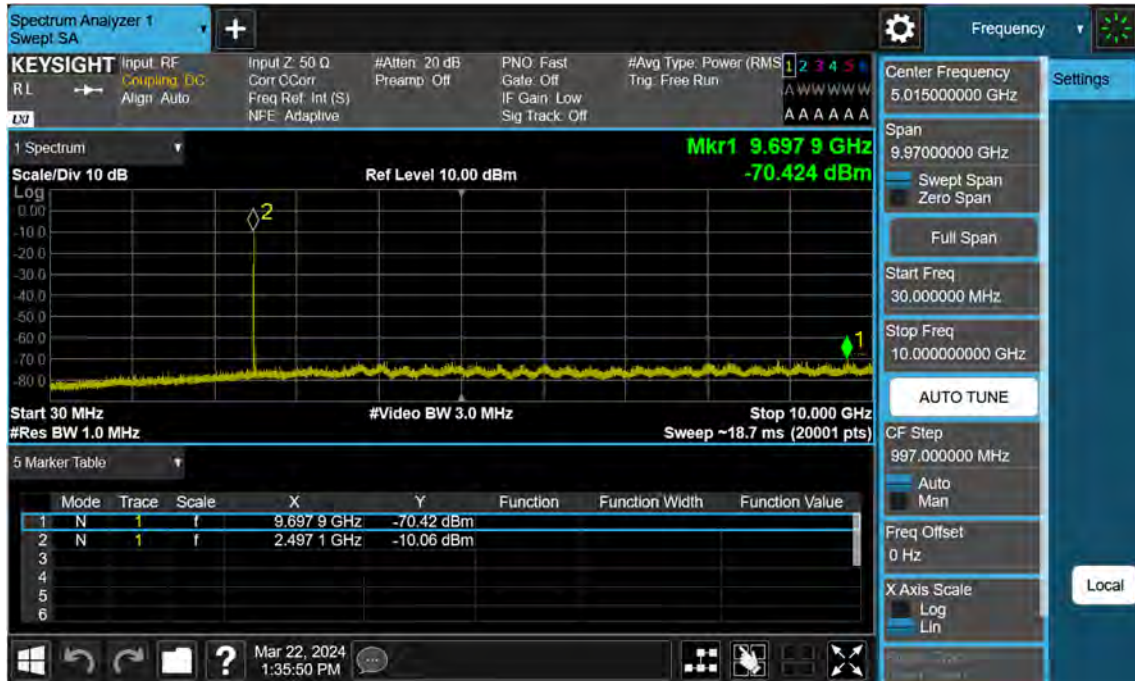




NR41\_25 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

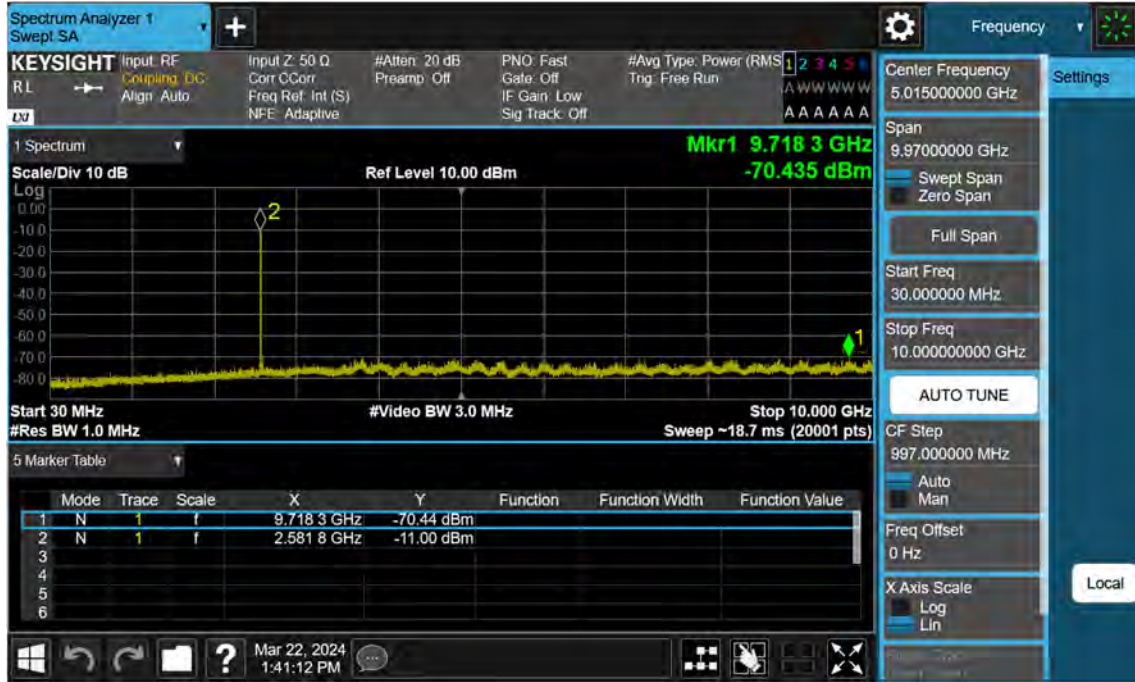


NR41\_25 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

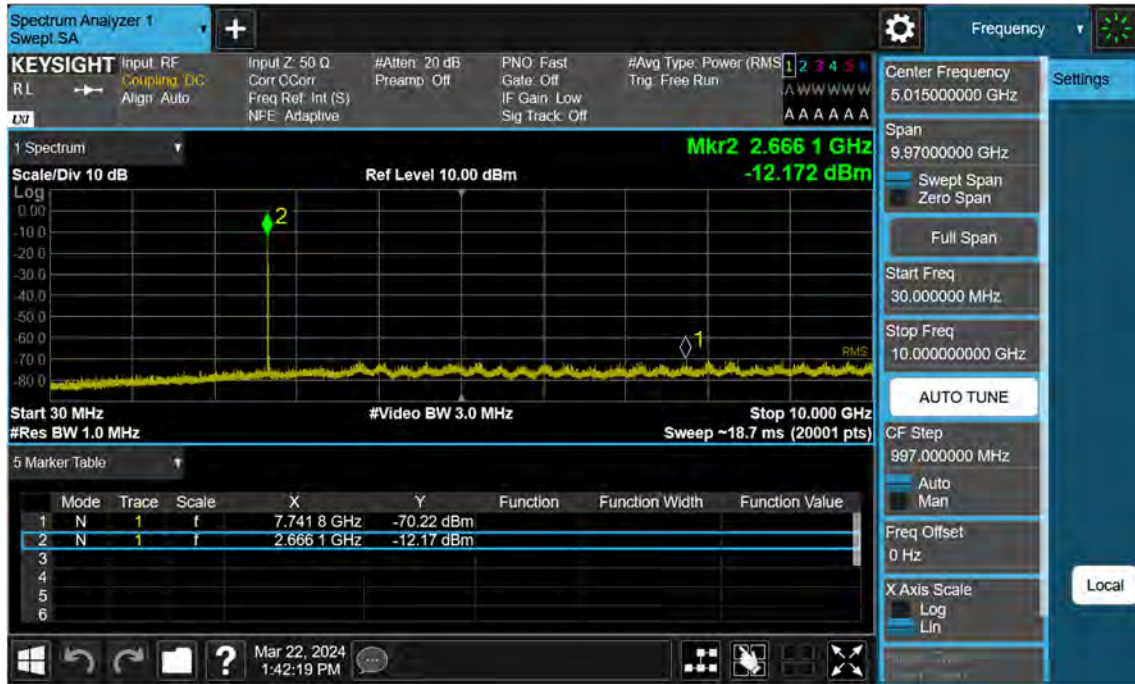




NR41\_30 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

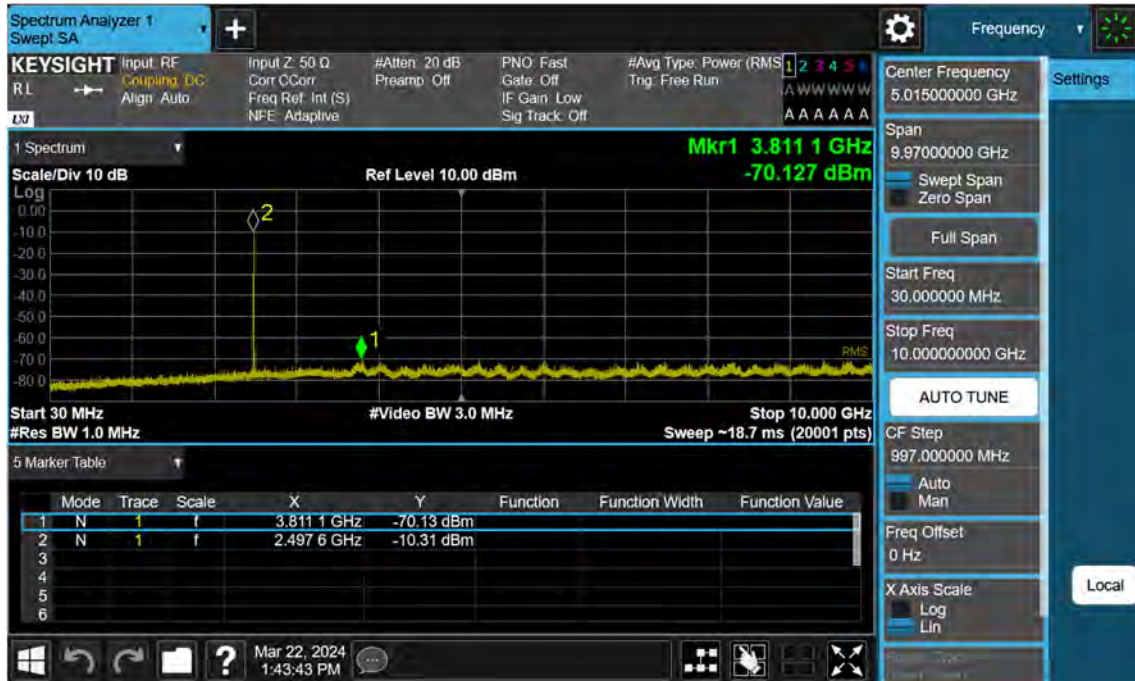


NR41\_30 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullIRB

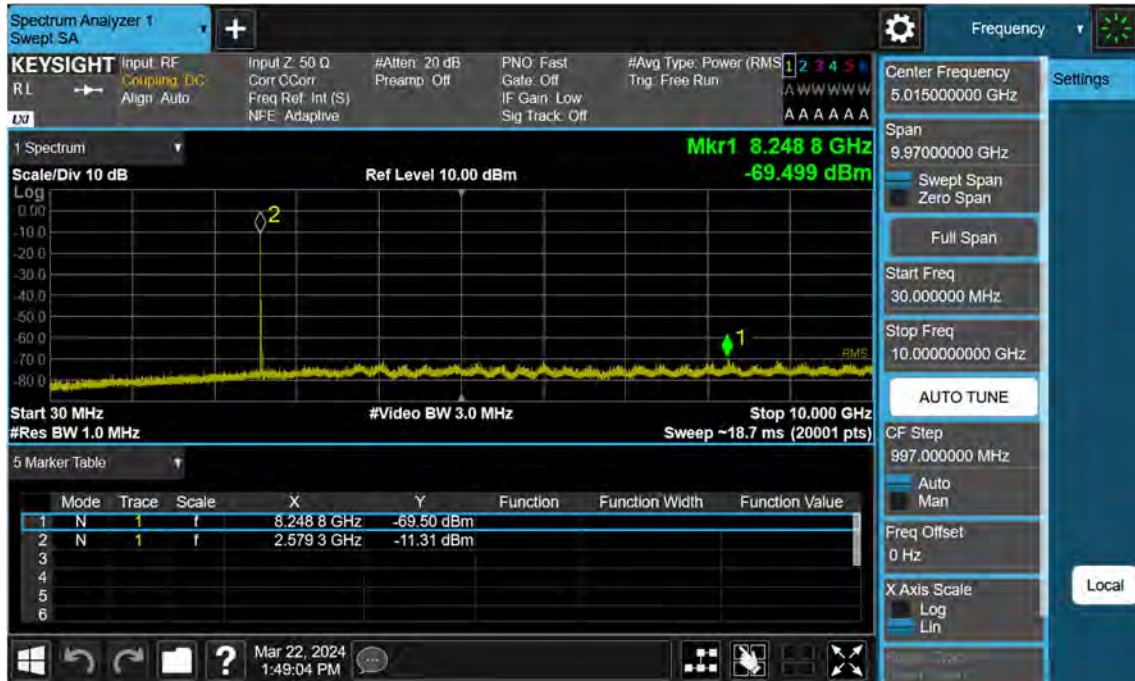


NR41\_30 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB



NR41\_40 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

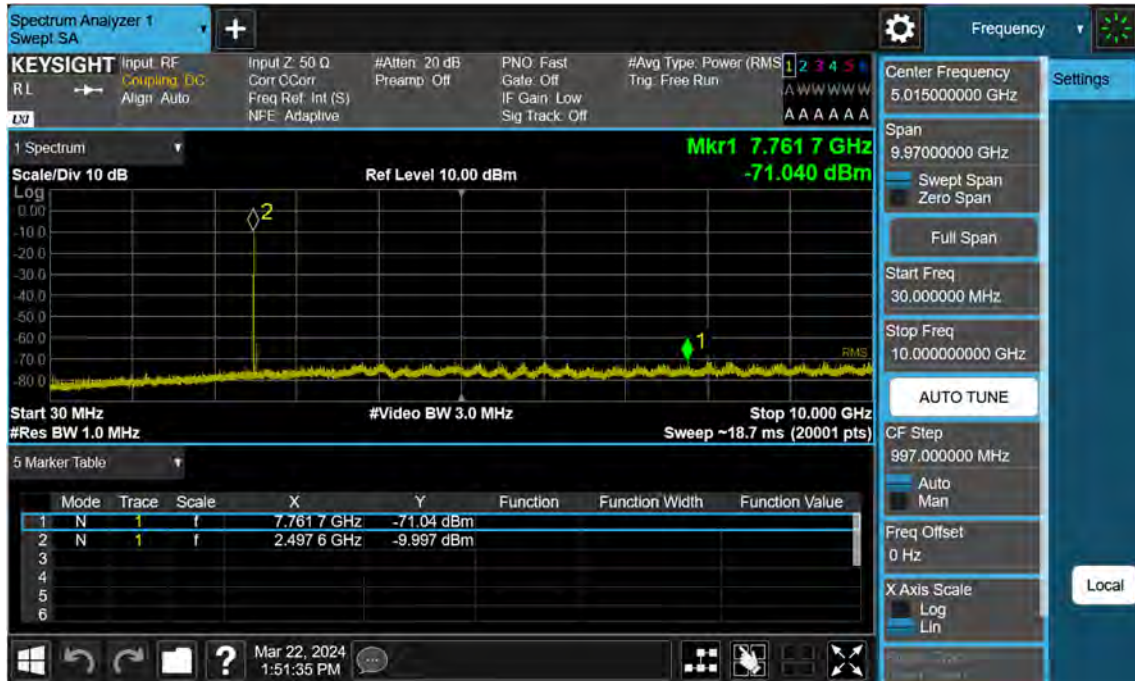


NR41\_40 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

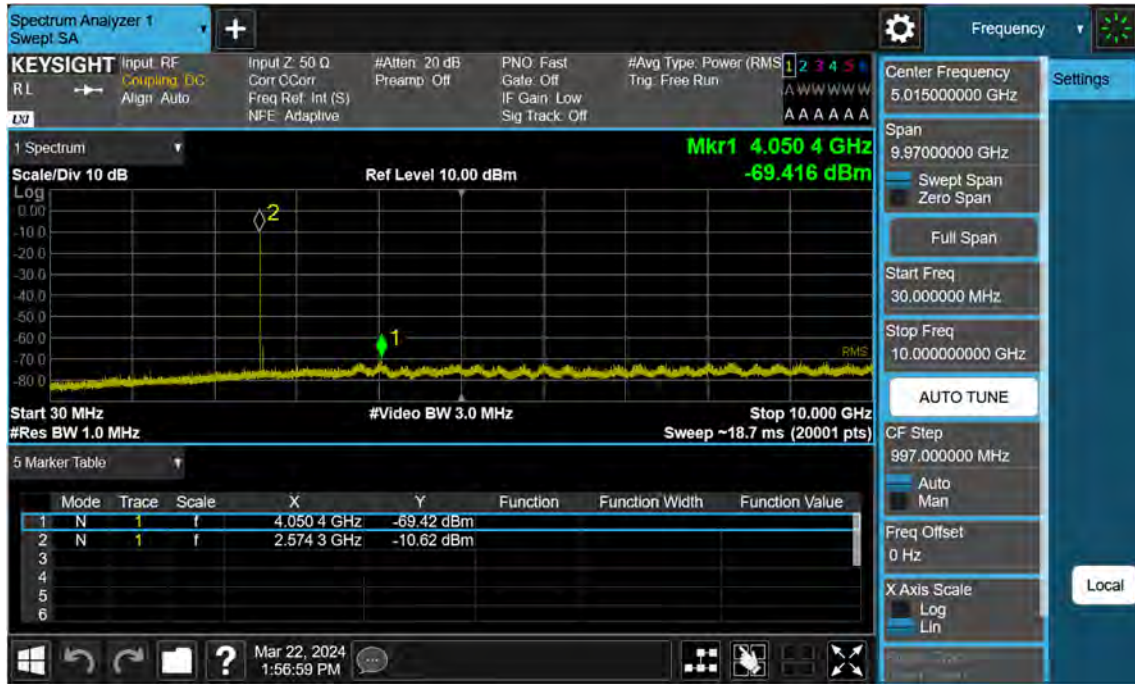




NR41\_40 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

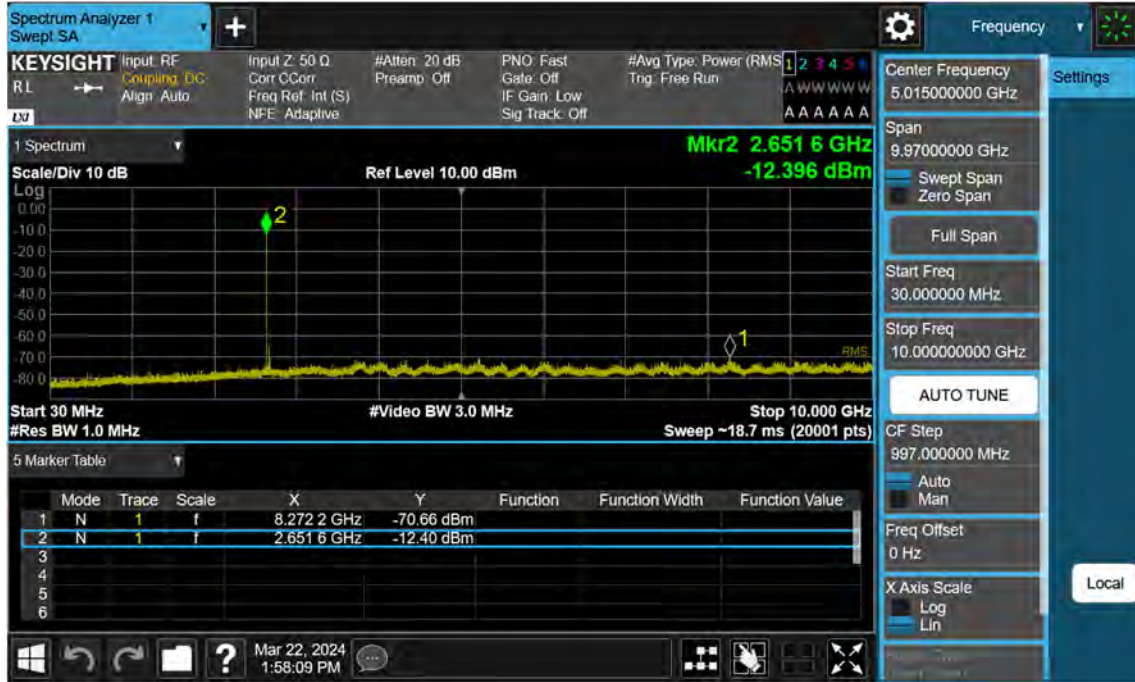


NR41\_50 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

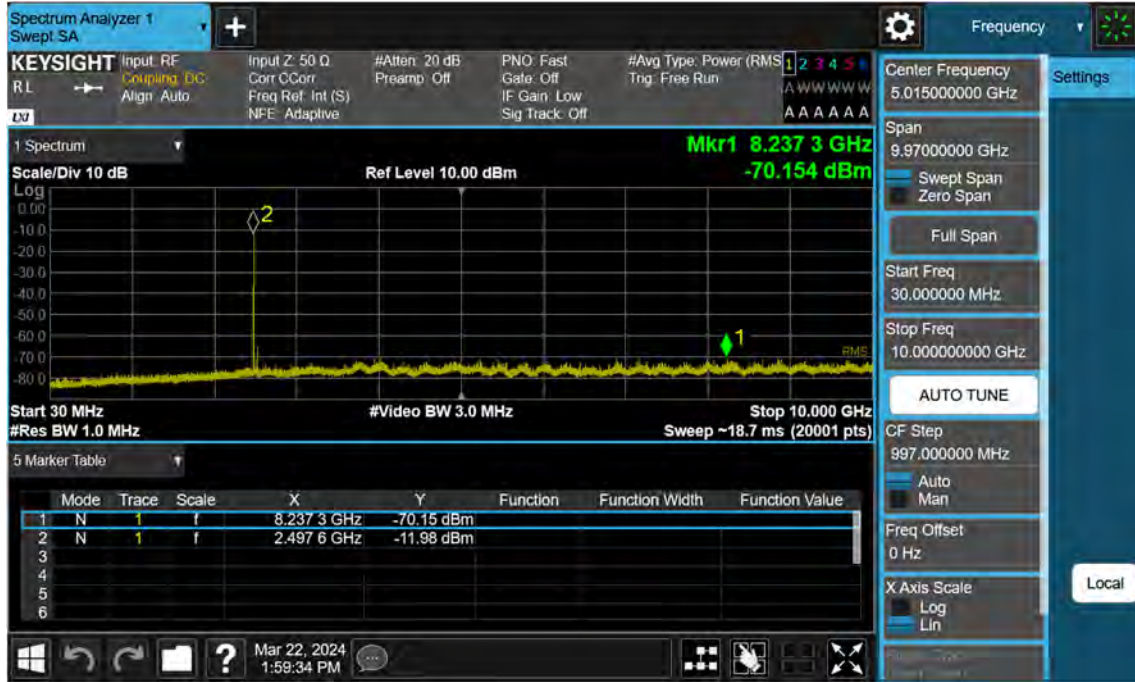





NR41\_50 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

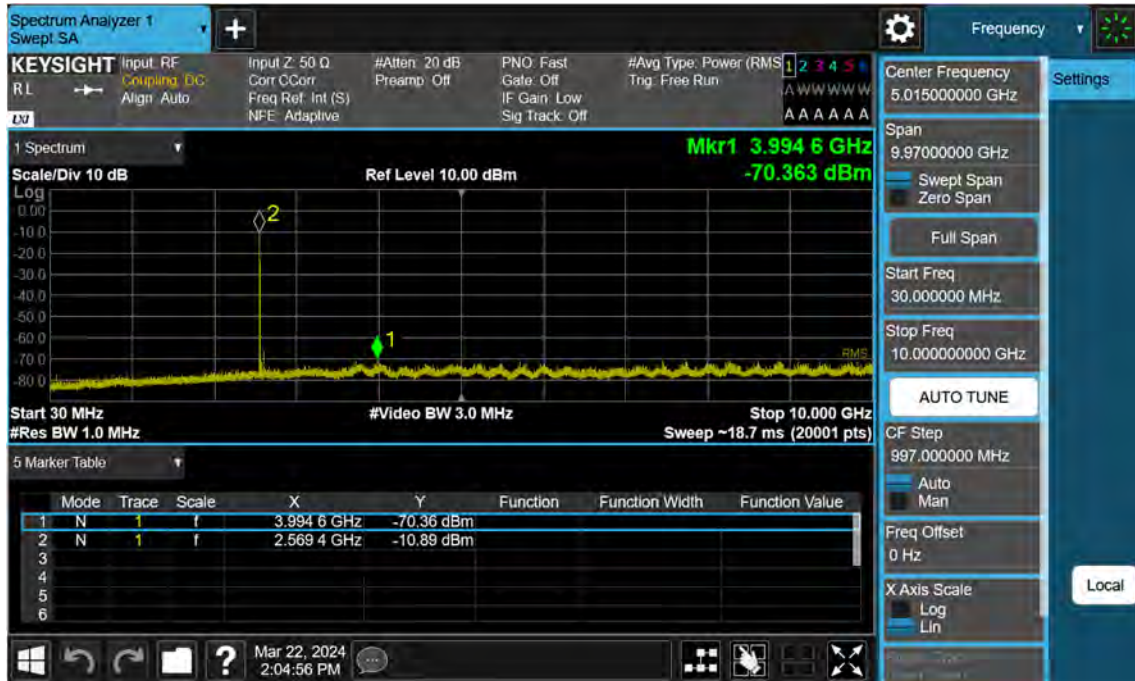


NR41\_50 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

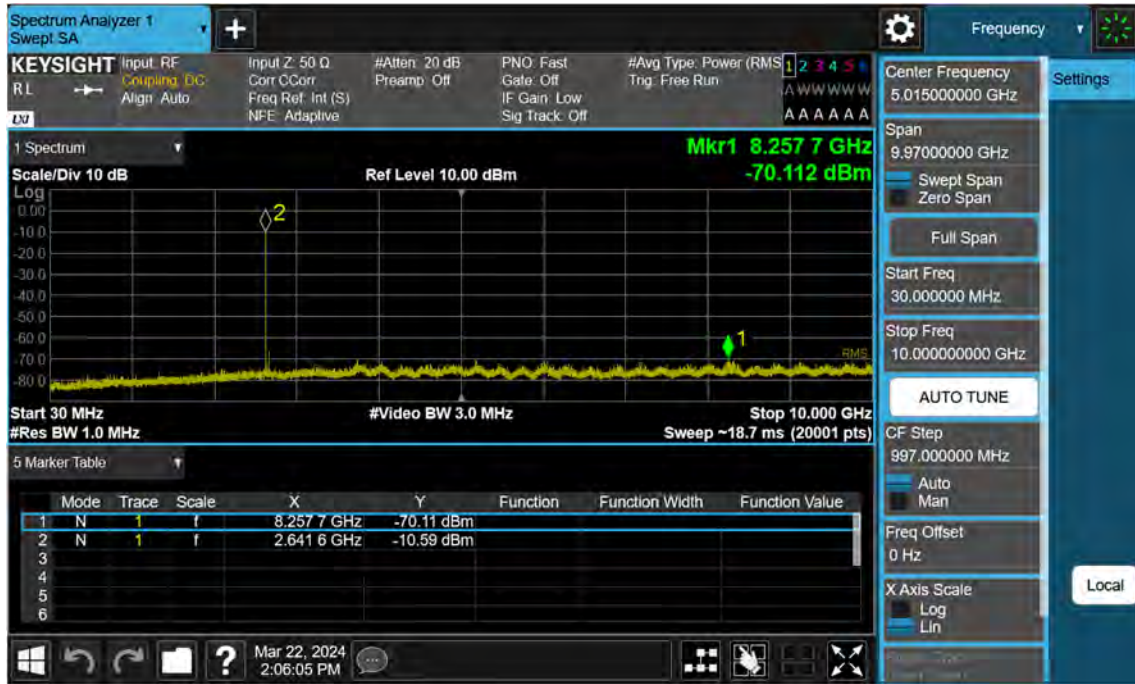


NR41\_60 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

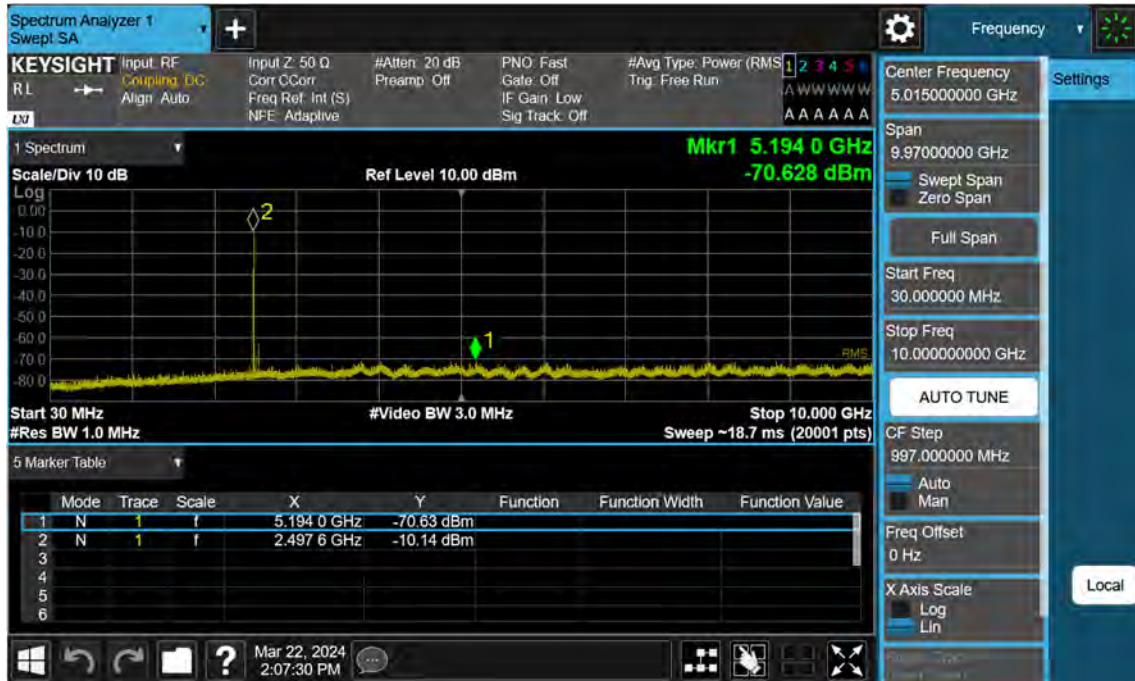

NR41\_60 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

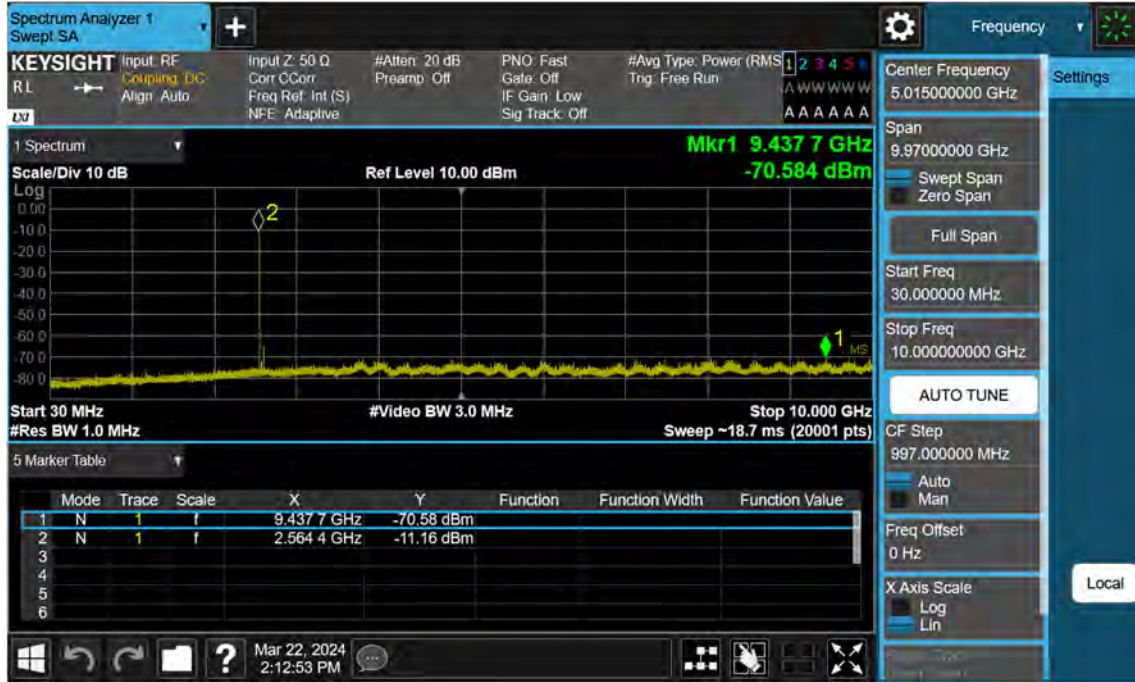


NR41\_60 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

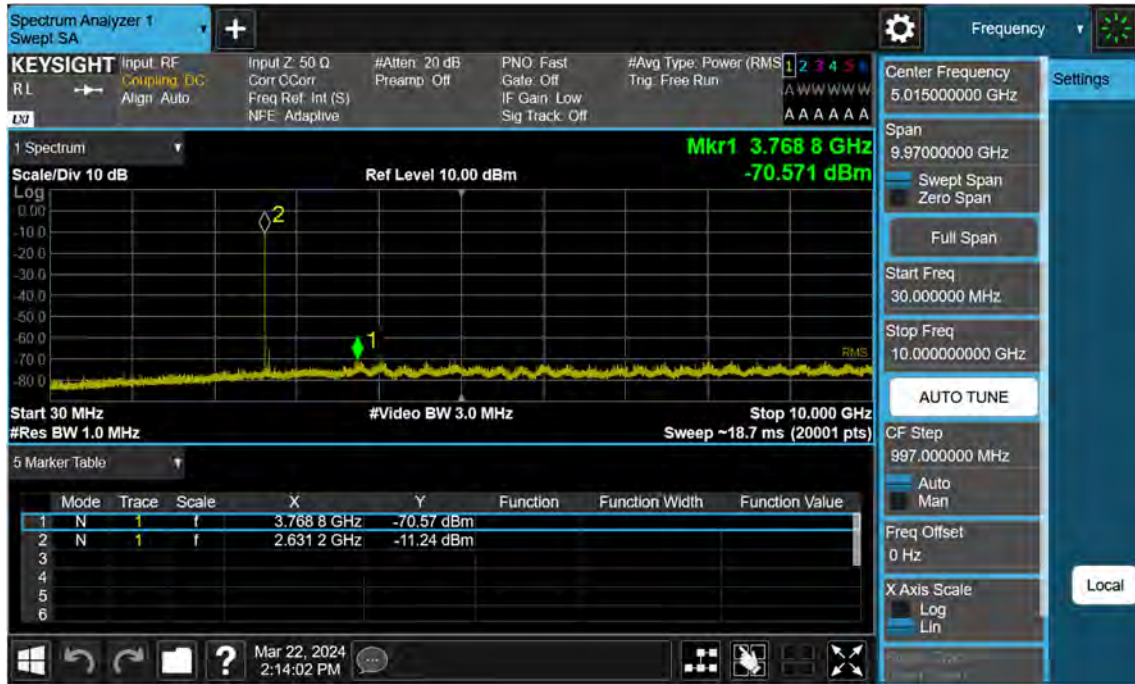




NR41\_70 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

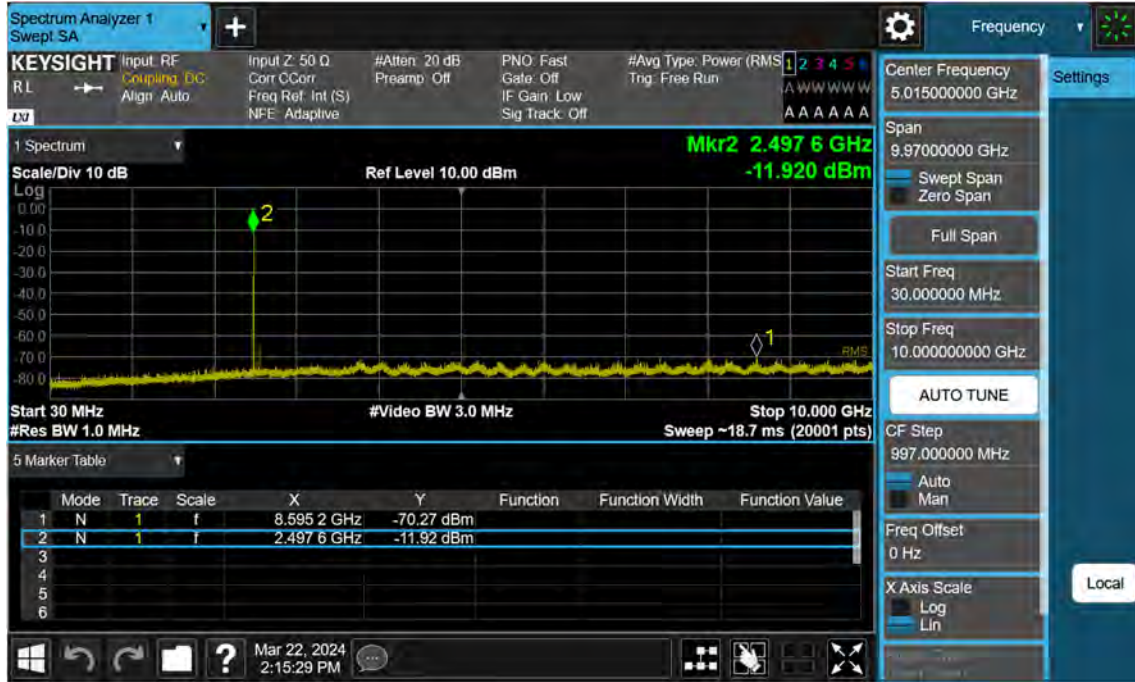


NR41\_70 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

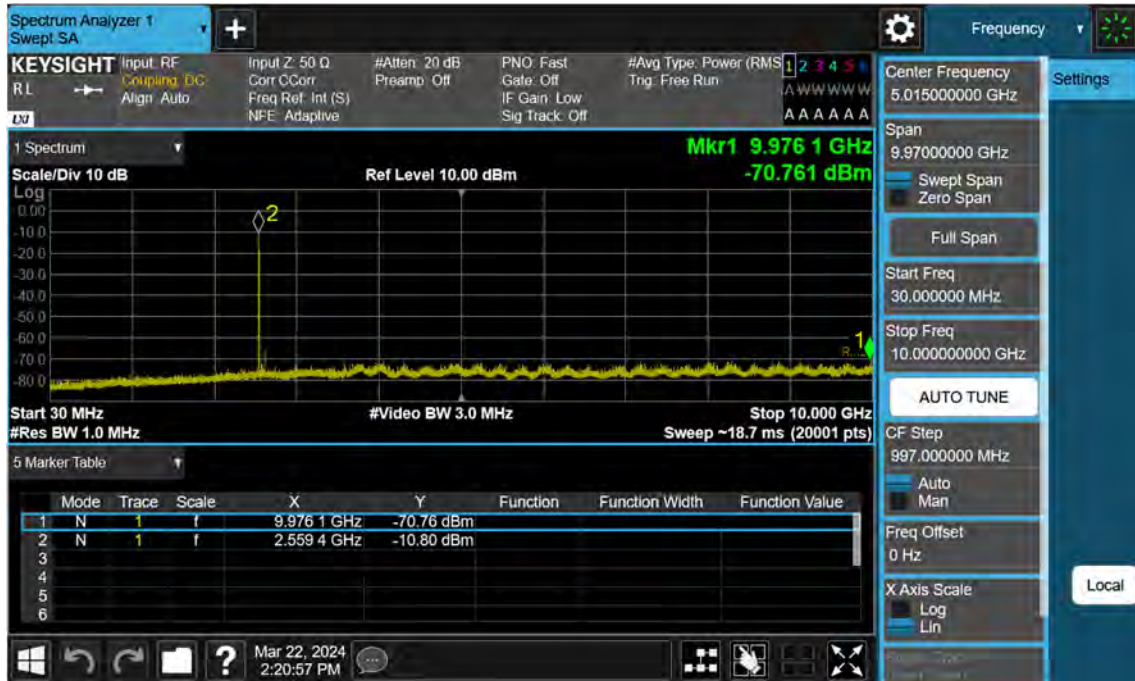





NR41\_70 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

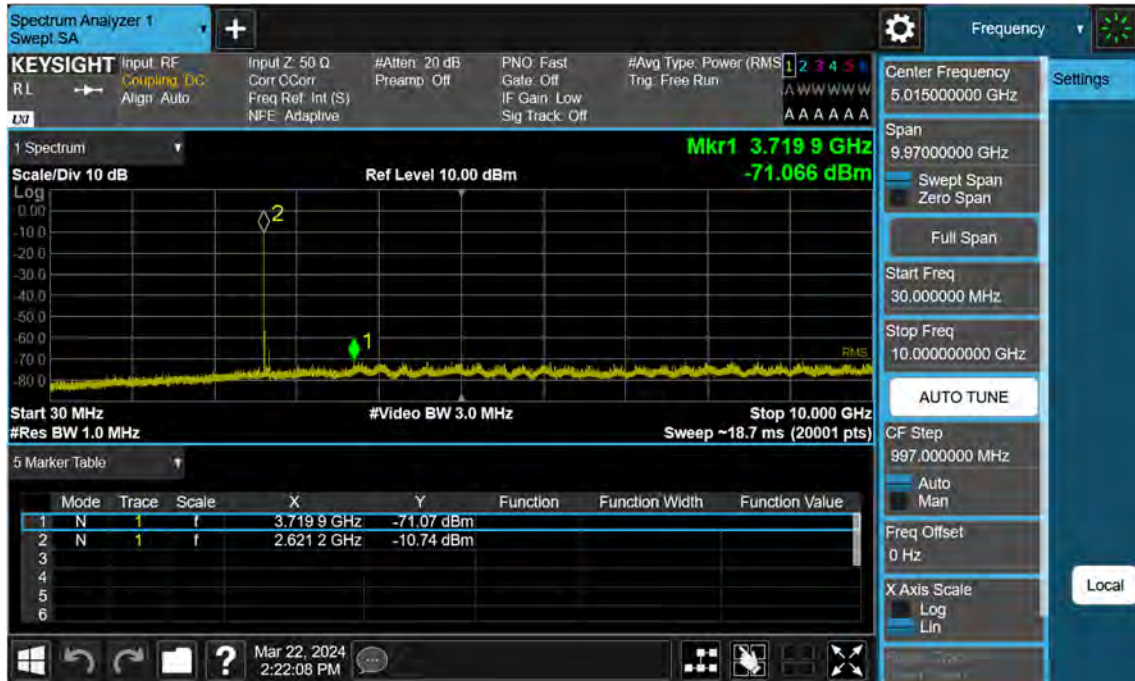


NR41\_80 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

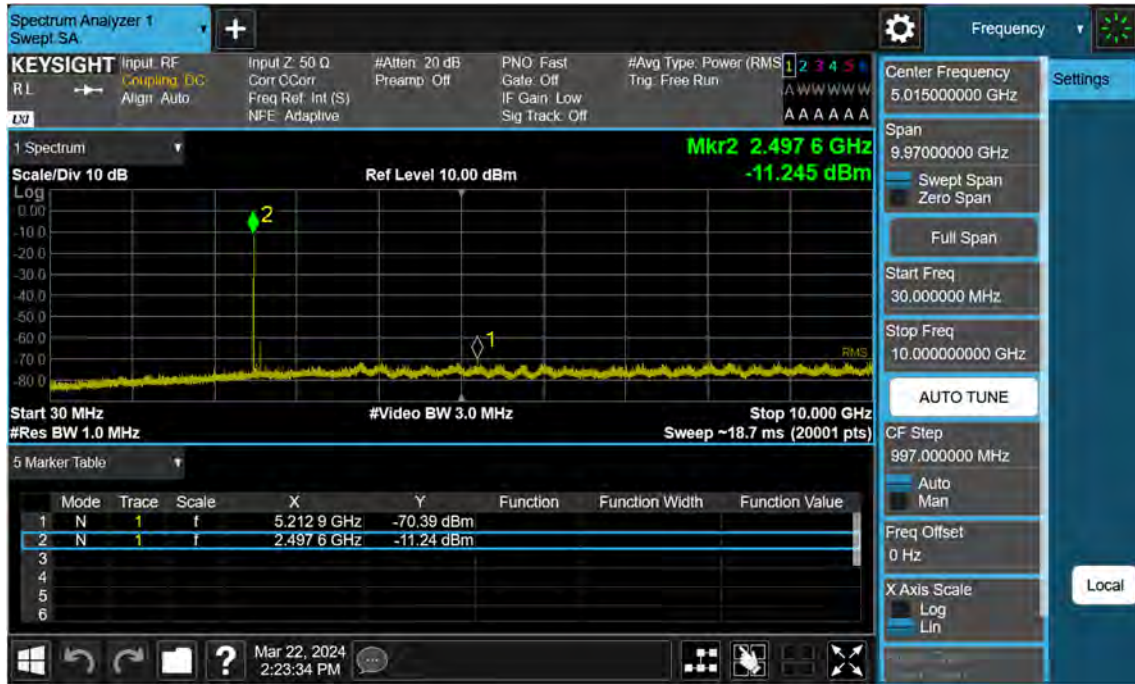


NR41\_80 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

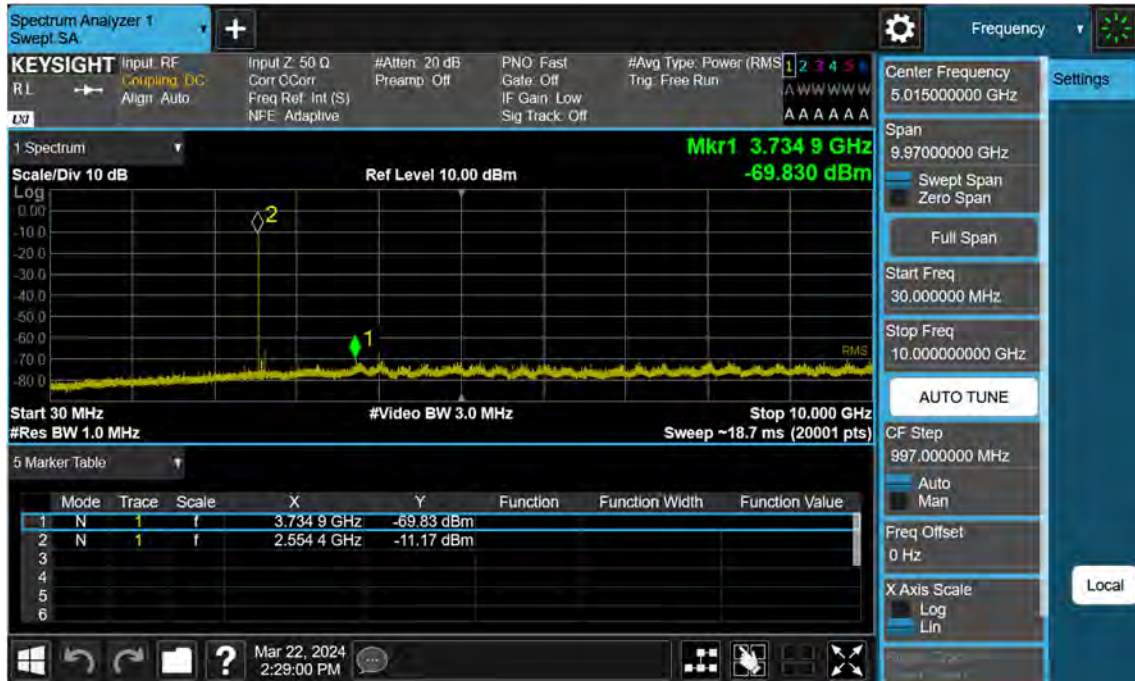

NR41\_80 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

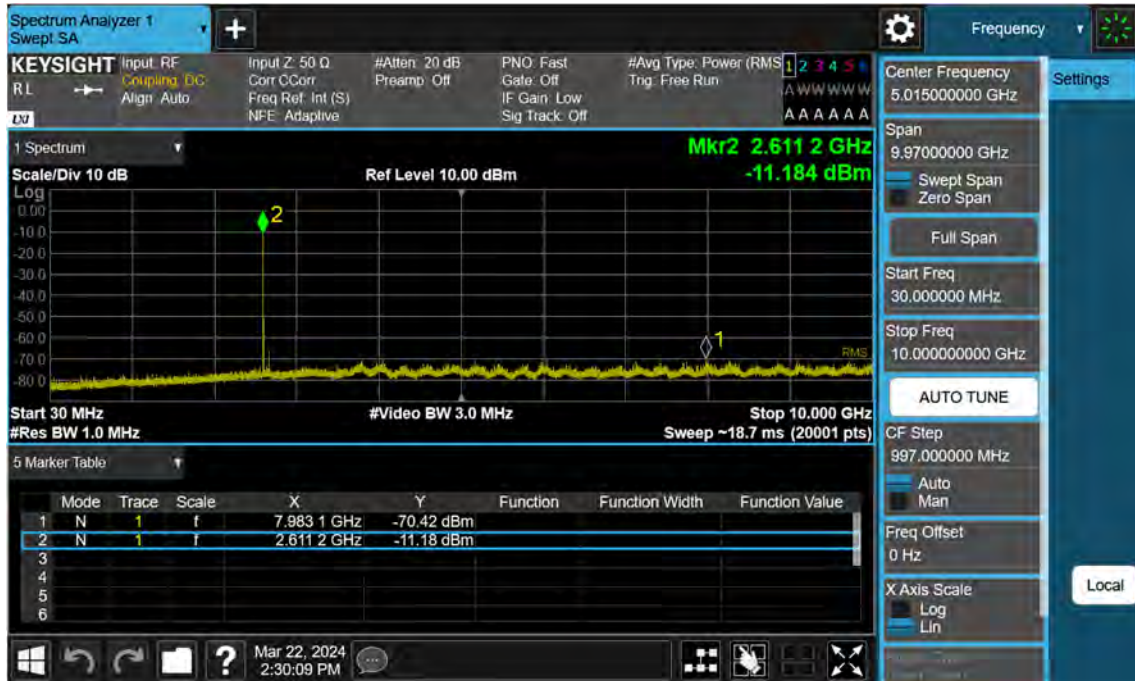


NR41\_90 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

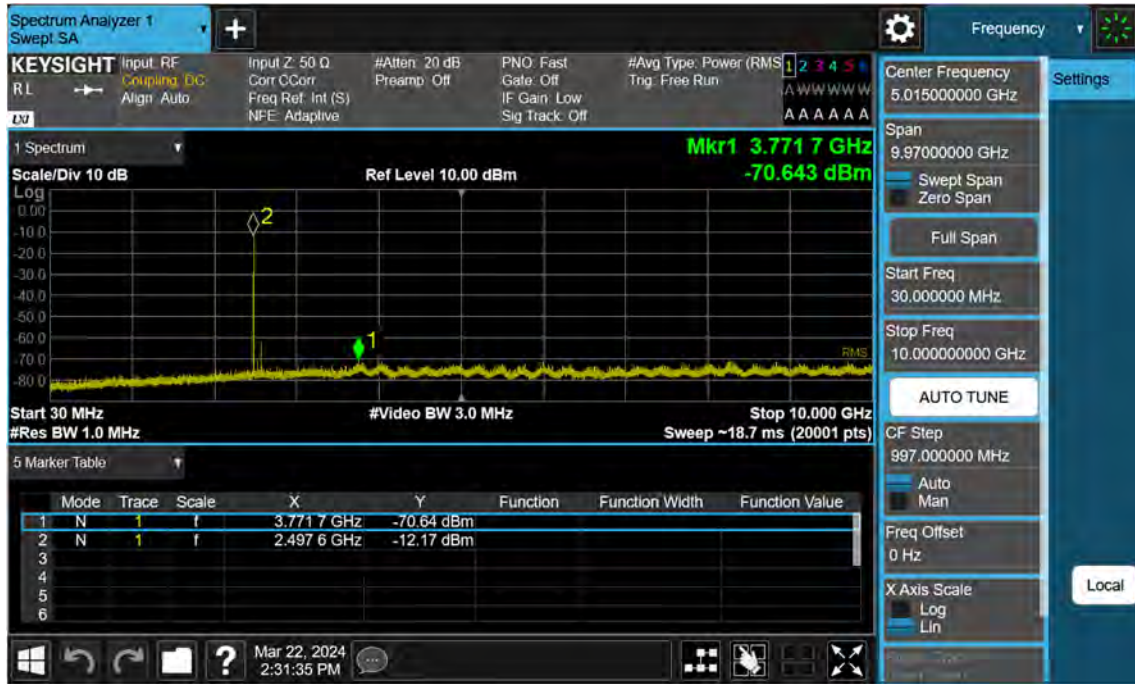




NR41\_90 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

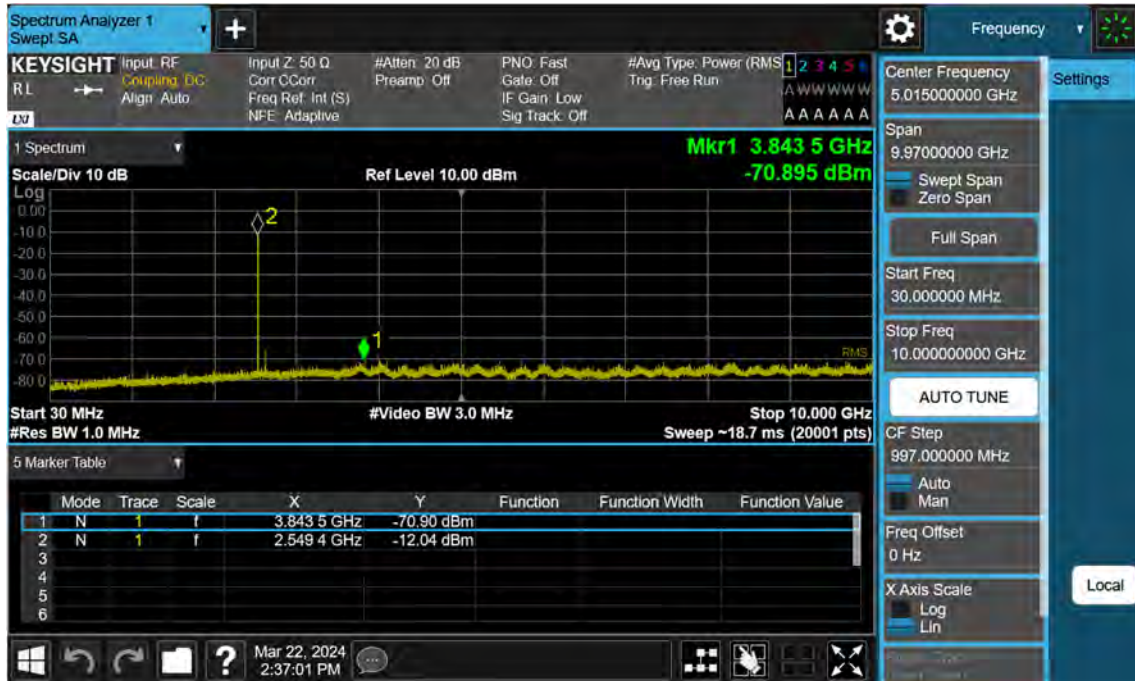

NR41\_90 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

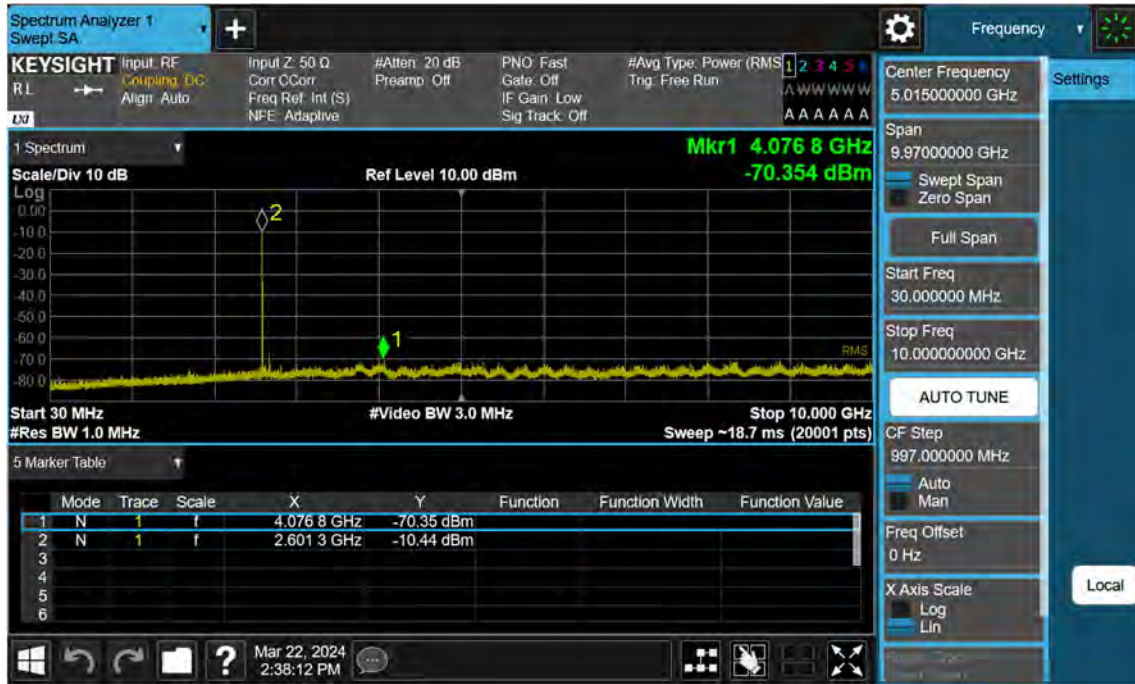



NR41\_100 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

