

TEST REPORT

WPC RF Exposure Test for certification of SM-F741B

APPLICANT

Samsung Electronics. Co., Ltd.

REPORT NO.

HCT-SR-2405-FC001

DATE OF ISSUE

May. 03 2024

Tested by
Dong Seon, Kim

(signature)



Technical Manager
Yun Jeang, Heo

(signature)



HCT CO., LTD.

BongJai Huh

BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

TEST REPORT

FCC WPC RF
Exposure Test for
certification

REPORT NO.
HCT-SR-2405-FC001

DATE OF ISSUE
May. 03, 2024

FCC ID
A3LSMF741B

Applicant **SAMSUNG Electronics Co., Ltd**
129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do, 16677, Korea

Product Name **Mobile Phone**
Model Name **SM-F74B**

Date of Test **Mar. 13, 2024 ~ Mar. 15, 2024**

Location of Test Permanent Testing Lab On Site Testing Lab
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si,

FCC Rule Part(s) **FCC Part 1 SUBPART I**
FCC Part 2 SUBPART J
KDB 680106 D01

Test Results **PASS**

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May. 03, 2024	Initial Release

Notice

Content

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. Test Methodology.....	5
2. Test Location.....	5
3. DEVICE UNDER TEST DESCRIPTION.....	6
4. TEST AND MEASUREMENT EQUIPMENT	9
5. MAXIMUM PERMISSIBLE RF EXPOSURE.....	10
6. TEST RESULTS	11
7. Conclusion.....	27

1. Test Methodology

The DUT was assessed in accordance with FCC KDB 680106 D01 RF Exposure Wireless Charging App v03r01.

2. Test Location

2.1 Test Laboratory

Company Name	HCT Co., Ltd.
Address	74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Telephone	031-645-6300
Fax.	031-645-6401

2.2 Test Facilities

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Korea	National Radio Research Agency (Designation No. KR0032)
	KOLAS (Testing No. KT197)

3. DEVICE UNDER TEST DESCRIPTION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Model Name	SM-F741B
EUT Type:	Mobile Phone
Application Type:	Certification

3.1 Description of DUT

The DUT is a mobile phone with a WPT (Wireless Power Transfer) feature using an inductive charging coil to charge a phone and a watch. The charging frequency is between 110 kHz to 148 kHz, and the maximum transfer power consumption is 9 W in charging status.

3.2 Test Configurations

Test configurations	Description
DUT to Phone test configuration 1	Charging from Phone to DUT
DUT to Phone test configuration 2	Charging from Phone to DUT(TA Charging from DUT)
DUT to Phone test configuration 3	Charging from Phone to DUT
DUT to Phone test configuration 4	Charging from Phone to DUT(TA Charging from DUT)
DUT to Phone test configuration 5	Charging from Watch to DUT
DUT to Phone test configuration 6	Charging from Watch to DUT(TA Charging from DUT)
DUT to Phone test configuration 7	Charging from Ear buds to DUT
DUT to Phone test configuration 8	Charging from Ear buds to DUT(TA Charging from DUT)

Note:

1. Configuration 2,4,6 and 8 were tested with the worst case of configuration 1,3,5 and 7

3.3 KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operation Frequency is between 110 kHz to 148 kHz.
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. Maximum power is 9 Watts.
(3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact)	Yes.
(4) Only § 2.1091-Mobile exposure conditions apply	Yes.
(5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1.	Yes. The aggregate field strengths at 20 cm from the device is 8.65 % of the H field and 0.20 % of the E-Field Limit
(6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested	No, it is a single radiating structure.

3.4 DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT & PERIPHERALS

SUPPORT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Watch	SAMSUNG Electronics Co., Ltd.	SM-R835F	A2103117677	A3LSMR835
Ear Buds	SAMSUNG Electronics Co., Ltd.	SM-R180	A2011103347	A3LSMR180L A3LSMR180R
Phone	SAMSUNG Electronics Co., Ltd.	SM-G986B/DS	R5CN101A0JM	A3LSMG986B

TEST SETUP

The following three modes are tested in test configuration;


All Position of client device were investigated and the worst position results are reported.

Mode
Operating (SUPPORT Equipment, <10% Power Charging)
Operating (SUPPORT Equipment, 50~55% Power Charging)
Operating (SUPPORT Equipment, 90~95% Power Charging)


MEASUREMENT TEST SETUP

The measurement was taken using a probe place 20 cm from the all edges of DUT above the DUT. Measurement were from the top and all sides of the DUT per 680106 D01 Wireless Power Transfer v04. Additionally, as the DUT to phone configuration could result with the DUT place either above or below the phone, measurements were performed 'below' the DUT by flipping the DUT/phone so that the DUT was uppermost.


The probe was moved along the edges or above the DUT to a position that showed the maximum field strength. This position was used for the reported result.

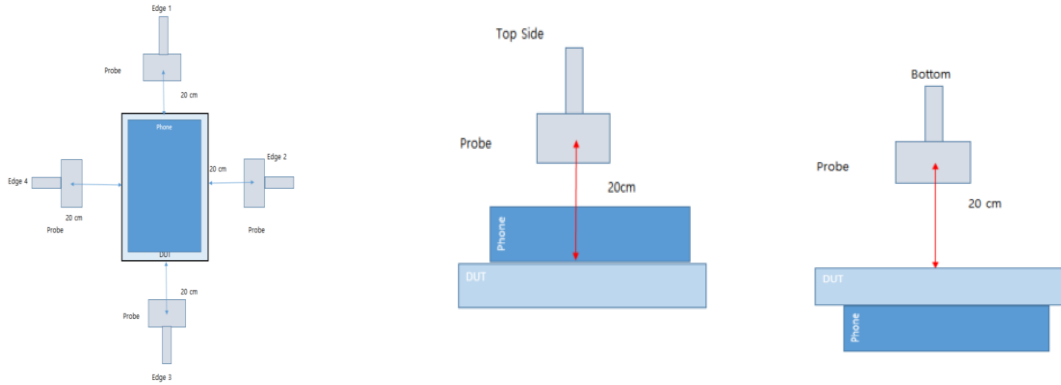

DUT to phone test Configuration 1 & 2

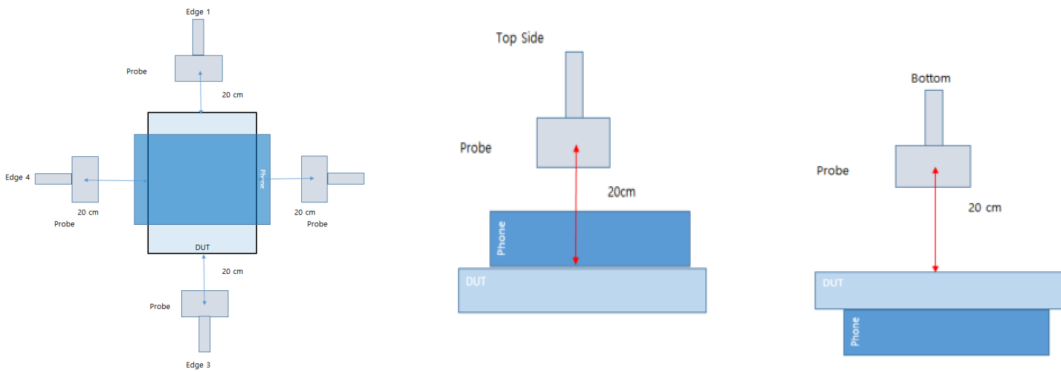

DUT to phone test Configuration 3 & 4

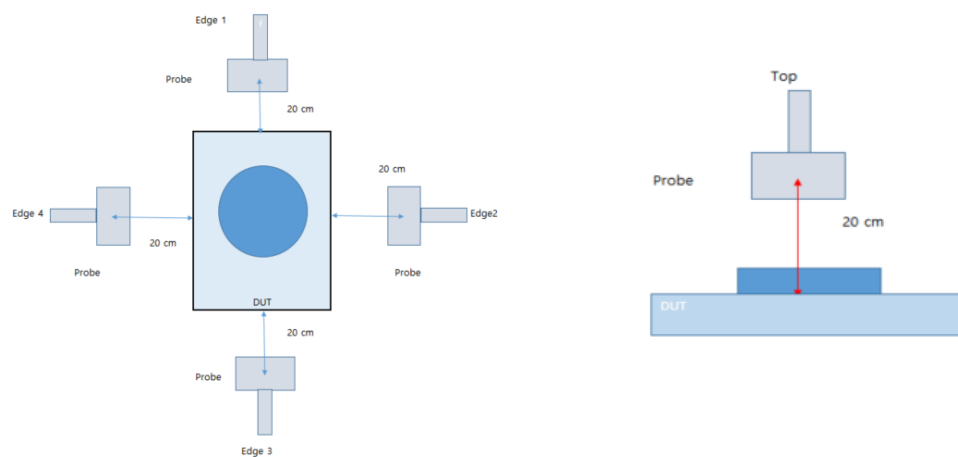

DUT to Watch/Ear buds test Configuration 5 & 6 and 7 & 8

4. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report:

Manufacturer	Model name	Description	S/N	Calib. Date	Calib.Due
Narda	EHP 200AC	Electric and Magnetic Field Probe	170WX91009	07/29/2022	07/29/2024

5. MAXIMUM PERMISSIBLE RF EXPOSURE

1.13010 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency(RF) radiation as specified in 1.1307(b), except in the case of portable devices which shall be evaluated according the provisions of 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

6. TEST RESULTS

H-Field Measurements

[Folder Open]

Note : peak measurements were performed. RMS values were calculated from the peak measurement.

Please refer to the formula for calculating the RMS value: [Field Strength * $\sqrt{\text{Duty Cycle}}$]

TEST results of DUT to phone test Configuration 1&2

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 1	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.054
		20 cm	Bottom		0.055
			Edge 1		0.054
			Edge 2		0.098
			Edge 3		0.072
			Edge 4		0.065
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.052
		20 cm	Bottom		0.073
			Edge 1		0.056
			Edge 2		0.083
			Edge 3		0.072
			Edge 4		0.067
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.053
		20 cm	Bottom		0.072
			Edge 1		0.057
			Edge 2		0.078
			Edge 3		0.061
			Edge 4		0.061
Configuration 2	Operation Real Product (Power <10% charging)	20 cm	Edge 2	1.63	0.088

TEST results of DUT to phone test Configuration 3&4

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 3	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.055
		20 cm	Bottom		0.074
			Edge 1		0.052
			Edge 2		0.069
			Edge 3		0.060
			Edge 4		0.053
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.054
		20 cm	Bottom		0.072
			Edge 1		0.054
			Edge 2		0.071
			Edge 3		0.061
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.053
		20 cm	Bottom		0.056
			Edge 1		0.056
			Edge 2		0.068
Edge 3			0.052		
Configuration 4	Operation Real Product (Power <10% charging)	20 cm	Bottom	1.63	0.070
			Edge 1		0.052
			Edge 2		0.068
			Edge 3		0.052
			Edge 4		0.048

TEST results of DUT to Watch test Configuration 5&6

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 5	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.053
		20 cm	Edge 1		0.054
			Edge 2		0.054
			Edge 3		0.052
			Edge 4		0.055
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.052
		20 cm	Edge 1		0.052
			Edge 2		0.052
			Edge 3		0.058
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.054
		20 cm	Edge 1		0.052
			Edge 2		0.053
Edge 3			0.056		
Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	1.63	0.059	
		Edge 4		1.63	0.061
		Edge 4			0.061
		Edge 4			0.061
Configuration 6	Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	1.63	0.061

TEST results of DUT to Ear Buds test Configuration 7&8

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 7	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.058
		20 cm	Edge 1		0.053
			Edge 2		0.066
			Edge 3		0.052
			Edge 4		0.122
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.064
		20 cm	Edge 1		0.054
			Edge 2		0.089
			Edge 3		0.054
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.072
		20 cm	Edge 1		0.053
			Edge 2		0.087
Edge 3			0.053		
Configuration 8	Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	1.63	0.135
			Edge 1		
			Edge 2		
			Edge 3		

E-Field Measurements

[Folder Open]

Note : peak measurements were performed. RMS values were calculated from the peak measurement.
Please refer to the formula for calculating the RMS value: [Field Strength * $\sqrt{\text{Duty Cycle}}$]

TEST results of DUT to phone test Configuration 1&2

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 1	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.482
		20 cm	Bottom		0.589
			Edge 1		0.421
			Edge 2		0.501
			Edge 3		0.347
			Edge 4		0.824
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.482
		20 cm	Bottom		0.523
			Edge 1		0.410
			Edge 2		0.506
			Edge 3		0.326
			Edge 4		0.720
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.504
		20 cm	Bottom		0.546
			Edge 1		0.403
			Edge 2		0.497
			Edge 3		0.325
			Edge 4		0.785
Configuration 2	Operation Real Product (Power <10% charging)	20 cm	Edge 4	614	0.738

TEST results of DUT to phone test Configuration 3&4

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 3	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.347
		20 cm	Bottom		0.837
			Edge 1		0.577
			Edge 2		0.534
			Edge 3		0.346
			Edge 4		1.104
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.326
		20 cm	Bottom		0.821
			Edge 1		0.543
			Edge 2		0.433
			Edge 3		0.327
			Edge 4		1.061
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.383
		20 cm	Bottom		0.814
			Edge 1		0.619
Edge 2			0.383		
Edge 3			0.358		
Edge 4			1.105		
Configuration 4	Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	614	1.150

TEST results of DUT to Watch test Configuration 5&6

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 5	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.335
		20 cm	Edge 1		0.365
			Edge 2		0.334
			Edge 3		0.393
			Edge 4		0.357
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.490
		20 cm	Edge 1		0.353
			Edge 2		0.317
			Edge 3		0.335
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.338
		20 cm	Edge 1		0.403
			Edge 2		0.298
			Edge 3		0.327
	Configuration 6	Operation Real Product (Power 50~55% charging)	20 cm	Top	614
20 cm			Edge 1	0.338	
			Edge 2	0.403	
			Edge 3	0.298	
			Edge 4	0.327	

TEST results of DUT to Ear Buds test Configuration 7&8

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 7	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.551
		20 cm	Edge 1		0.458
			Edge 2		0.334
			Edge 3		0.349
			Edge 4		0.326
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.653
		20 cm	Edge 1		0.397
			Edge 2		0.326
			Edge 3		0.341
			Edge 4		0.335
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.543
		20 cm	Edge 1		0.389
Edge 2			0.318		
Edge 3			0.355		
Edge 4			0.334		
Configuration 8	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.694

H-Field Measurements

[Folder Close]

Note : peak measurements were performed. RMS values were calculated from the peak measurement.

Please refer to the formula for calculating the RMS value: [Field Strength * $\sqrt{\text{Duty Cycle}}$]

TEST results of DUT to phone test Configuration 1&2

FCC RF Exposure Result						
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)	
Configuration 1	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.055	
		20 cm	Bottom		0.054	
			Edge 1		0.052	
			Edge 2		0.084	
			Edge 3		0.056	
			Edge 4		0.108	
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.056	
		20 cm	Bottom		0.054	
			Edge 1		0.054	
			Edge 2		0.087	
			Edge 3		0.071	
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.052	
		20 cm	Bottom		0.053	
			Edge 1		0.052	
			Edge 2		0.080	
			Edge 3		0.068	
	Configuration 2	Operation Real Product (Power <10% charging)	20 cm	Edge 4	1.63	0.095
				Edge 4		0.095
Edge 4				0.095		
Edge 4				0.095		
Edge 4				0.095		

TEST results of DUT to phone test Configuration 3&4

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 3	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.052
		20 cm	Bottom		0.052
			Edge 1		0.059
			Edge 2		0.055
			Edge 3		0.054
			Edge 4		0.055
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.054
		20 cm	Bottom		0.050
			Edge 1		0.059
			Edge 2		0.053
			Edge 3		0.054
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.057
		20 cm	Bottom		0.053
			Edge 1		0.053
			Edge 2		0.051
Edge 3			0.055		
Configuration 4	Operation Real Product (Power <10% charging)	20 cm	Edge 1	1.63	0.061
			Edge 2		
			Edge 3		
			Edge 4		
			Top		

TEST results of DUT to Watch test Configuration 5&6

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 5	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.053
		20 cm	Edge 1		0.057
			Edge 2		0.052
			Edge 3		0.069
			Edge 4		0.114
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.054
		20 cm	Edge 1		0.053
			Edge 2		0.054
			Edge 3		0.066
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.052
		20 cm	Edge 1		0.054
			Edge 2		0.052
			Edge 3		0.065
				Edge 4	0.141
Configuration 6	Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	1.63	0.132

TEST results of DUT to Ear Buds test Configuration 7&8

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 7	Operation Real Product (Power <10% charging)	20 cm	Top	1.63	0.065
		20 cm	Edge 1		0.054
			Edge 2		0.053
			Edge 3		0.053
			Edge 4		0.104
	Operation Real Product (Power 50~55% charging)	20 cm	Top	1.63	0.061
		20 cm	Edge 1		0.052
			Edge 2		0.069
			Edge 3		0.054
	Operation Real Product (Power 90~95% charging)	20 cm	Top	1.63	0.068
		20 cm	Edge 1		0.052
			Edge 2		0.055
Edge 3			0.049		
			Edge 4	0.134	
Configuration 8	Operation Real Product (Power 90~95% charging)	20 cm	Edge 4	1.63	0.116

E-Field Measurements

[Folder Close]

Note : peak measurements were performed. RMS values were calculated from the peak measurement.

Please refer to the formula for calculating the RMS value: [Field Strength * $\sqrt{\text{Duty Cycle}}$]

TEST results of DUT to phone test Configuration 1&2

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 1	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.389
		20 cm	Bottom		0.893
			Edge 1		0.474
			Edge 2		0.348
			Edge 3		0.402
			Edge 4		0.429
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.387
		20 cm	Bottom		0.852
			Edge 1		0.422
			Edge 2		0.389
			Edge 3		0.429
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.354
		20 cm	Bottom		0.783
			Edge 1		0.428
			Edge 2		0.389
Edge 3			0.469		
Configuration 2	Operation Real Product (Power 50~55% charging)	20 cm	Bottom	614	0.968

TEST results of DUT to phone test Configuration 3&4

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 3	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.349
		20 cm	Bottom		0.981
			Edge 1		0.409
			Edge 2		0.409
			Edge 3		0.477
			Edge 4		0.423
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.334
		20 cm	Bottom		0.906
			Edge 1		0.373
			Edge 2		0.334
			Edge 3		0.420
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.357
		20 cm	Bottom		0.971
			Edge 1		0.387
			Edge 2		0.357
Edge 3			0.323		
Configuration 4	Operation Real Product (Power <10% charging)	20 cm	Bottom	614	1.236
			Edge 4		0.383
			Edge 3		0.323
			Edge 2		0.357
			Edge 1		0.387

TEST results of DUT to Watch test Configuration 5&6

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 5	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.498
		20 cm	Edge 1		0.334
			Edge 2		0.357
			Edge 3		0.364
			Edge 4		0.346
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.603
		20 cm	Edge 1		0.335
			Edge 2		0.341
			Edge 3		0.326
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.518
		20 cm	Edge 1		0.326
			Edge 2		0.325
			Edge 3		0.335
	Configuration 6	Operation Real Product (Power 50~55% charging)	20 cm	Top	614
20 cm			Edge 1	0.326	
			Edge 2	0.325	
			Edge 3	0.335	

TEST results of DUT to Ear Buds test Configuration 7&8

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	E-Field Limit (V/m)	E-Field meas data (V/m)
Configuration 7	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.631
		20 cm	Edge 1		0.349
			Edge 2		0.326
			Edge 3		0.334
			Edge 4		0.433
	Operation Real Product (Power 50~55% charging)	20 cm	Top	614	0.608
		20 cm	Edge 1		0.326
			Edge 2		0.334
			Edge 3		0.326
	Operation Real Product (Power 90~95% charging)	20 cm	Top	614	0.613
		20 cm	Edge 1		0.349
			Edge 2		0.422
Edge 3			0.335		
Configuration 8	Operation Real Product (Power <10% charging)	20 cm	Top	614	0.523
		20 cm	Edge 1		0.349
			Edge 2		0.422
			Edge 3		0.335
			Edge 4		0.343

7. Conclusion

	H-Field (A/m)	E-Field (V/m)
MPE Limit	1.63	614
Maximum Measurement Result	0.141	1.236
Percentage (%)	8.65	0.20

H-Field, E-Field test result was less than 50% of MPE Limit