

TEST REPORT

FCC LTE B66(4) Test for SC-54E
Certification

APPLICANT
SAMSUNG Electronics Co., Ltd.

REPORT NO.
HCT-RF-2405-FC038-R1

DATE OF ISSUE
May 29, 2024

Tested by
Jae Mun Do



Technical Manager
Jong Seok Lee



HCT CO., LTD.
Bongjai Huh
BongJai Huh / CEO



HCT CO.,LTD.

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST
REPORT**

REPORT NO.
HCT-RF-2405-FC038-R1

DATE OF ISSUE
May 29, 2024

Additional Model
SCG29

Applicant **SAMSUNG Electronics Co., Ltd.**
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Product Name Mobile Phone
Model Name SC-54E

Date of Test May 07, 2024 ~ May 20, 2024

Location of Test Permanent Testing Lab On Site Testing
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

FCC ID A3LSMF741JPN

FCC Classification PCS Licensed Transmitter Held to Ear (PCE)

Test Standard Used FCC Rule Part(s) : § 27

Test Results PASS

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	May 24, 2024	Initial Release
1	May 29, 2024	Deleted the 256QAM

Notice

Content

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

The laboratory is not accredited for the test results marked *.

Information provided by the applicant is marked **.

Test results provided by external providers are marked ***.

When confirmation of authenticity of this test report is required, please contact www.hct.co.kr

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

CONTENTS

1. GENERAL INFORMATION	5
1.1. MAXIMUM OUTPUT POWER	6
2. INTRODUCTION.....	8
2.1. DESCRIPTION OF EUT	8
2.2. MEASURING INSTRUMENT CALIBRATION	8
2.3. TEST FACILITY.....	8
3. DESCRIPTION OF TESTS	9
3.1 TEST PROCEDURE	9
3.2 RADIATED POWER	10
3.3 RADIATED SPURIOUS EMISSIONS.....	11
3.4 PEAK- TO- AVERAGE RATIO	12
3.5 OCCUPIED BANDWIDTH.....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	15
3.7 BAND EDGE.....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	18
3.9 WORST CASE(RADIATED TEST)	19
3.10 WORST CASE(CONDUCTED TEST)	21
4. LIST OF TEST EQUIPMENT	22
5. MEASUREMENT UNCERTAINTY	23
6. SUMMARY OF TEST RESULTS	24
7. SAMPLE CALCULATION	25
8. TEST DATA(Main 1 Ant).....	27
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	27
8.2 RADIATED SPURIOUS EMISSIONS.....	30
8.3 PEAK-TO-AVERAGE RATIO.....	31
8.4 OCCUPIED BANDWIDTH	32
8.5 CONDUCTED SPURIOUS EMISSIONS.....	33
8.6 BAND EDGE.....	33
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	34
9. TEST DATA(Sub 5 Ant)	52
9.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	52
9.2 RADIATED SPURIOUS EMISSIONS.....	55
9.3 PEAK-TO-AVERAGE RATIO	56
9.4 OCCUPIED BANDWIDTH	57
9.5 CONDUCTED SPURIOUS EMISSIONS.....	58
9.6 BAND EDGE.....	58
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	59
10. TEST PLOTS(Main 1 Ant).....	77
11. TEST PLOTS(Sub 5 Ant)	186
12. ANNEX A_ TEST SETUP PHOTO	295

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMF741JPN
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§ 27
EUT Type:	Mobile phone
Model(s):	SC-54E
Additional Model(s)	SCG29
Tx Frequency:	1710.7 MHz – 1779.3 MHz (LTE – Band 66/4 (1.4 MHz)) 1711.5 MHz – 1778.5 MHz (LTE – Band 66/4 (3 MHz)) 1712.5 MHz – 1777.5 MHz (LTE – Band 66/4 (5 MHz)) 1715.0 MHz – 1775.0 MHz (LTE – Band 66/4 (10 MHz)) 1717.5 MHz – 1772.5 MHz (LTE – Band 66/4 (15 MHz)) 1720.0 MHz – 1770.0 MHz (LTE – Band 66/4 (20 MHz))
Date(s) of Tests:	May 07, 2024 ~ May 20, 2024
Serial number:	Radiated : R3CX30L0LBW Conducted : R3CX30L0KYR

1.1. MAXIMUM OUTPUT POWER

Main 1 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.171	22.33
		1M10W7D	16QAM	0.142	21.51
		1M10W7D	64QAM	0.112	20.48
LTE – Band66/4 (3)	1711.5 – 1778.5	2M71G7D	QPSK	0.168	22.26
		2M72W7D	16QAM	0.141	21.50
		2M71W7D	64QAM	0.141	21.48
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.171	22.32
		4M50W7D	16QAM	0.144	21.58
		4M52W7D	64QAM	0.111	20.46
LTE – Band66/4 (10)	1715.0 – 1775.0	8M99G7D	QPSK	0.171	22.32
		8M99W7D	16QAM	0.140	21.46
		9M00W7D	64QAM	0.111	20.46
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.174	22.41
		13M5W7D	16QAM	0.142	21.53
		13M5W7D	64QAM	0.113	20.52
LTE – Band66/4 (20)	1720.0 – 1770.0	18M0G7D	QPSK	0.167	22.24
		18M0W7D	16QAM	0.139	21.43
		18M0W7D	64QAM	0.110	20.40

Sub 5 Ant

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band66/4 (1.4)	1710.7 – 1779.3	1M10G7D	QPSK	0.154	21.87
		1M10W7D	16QAM	0.129	21.09
		1M10W7D	64QAM	0.100	20.02
LTE – Band66/4 (3)	1711.5 – 1778.5	2M72G7D	QPSK	0.153	21.84
		2M72W7D	16QAM	0.127	21.05
		2M72W7D	64QAM	0.100	20.00
LTE – Band66/4 (5)	1712.5 – 1777.5	4M51G7D	QPSK	0.153	21.86
		4M50W7D	16QAM	0.130	21.13
		4M51W7D	64QAM	0.101	20.04
LTE – Band66/4 (10)	1715.0 – 1775.0	9M00G7D	QPSK	0.151	21.80
		8M99W7D	16QAM	0.126	20.99
		8M99W7D	64QAM	0.101	20.05
LTE – Band66/4 (15)	1717.5 – 1772.5	13M5G7D	QPSK	0.155	21.90
		13M5W7D	16QAM	0.128	21.06
		13M5W7D	64QAM	0.100	20.02
LTE – Band66/4 (20)	1720.0 – 1770.0	17M9G7D	QPSK	0.153	21.84
		18M0W7D	16QAM	0.124	20.94
		17M9W7D	64QAM	0.098	19.92

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6
It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW \geq 3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $>$ 2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

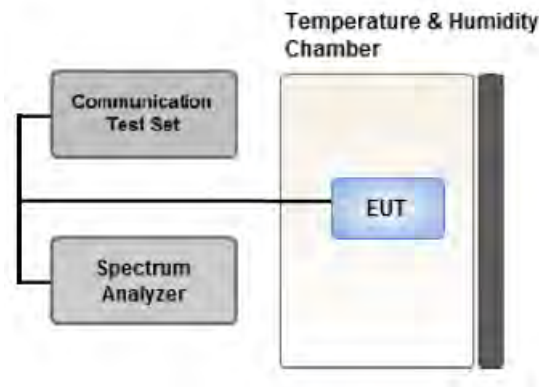

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - .- for continuous transmissions, set to 1 ms,
 - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW \geq OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) \times (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW \geq OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:
Set $\geq [10 \times$ (number of points in sweep) \times (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6$ dB if the duty cycle is a constant 25 %.

3.5 OCCUPIED BANDWIDTH.

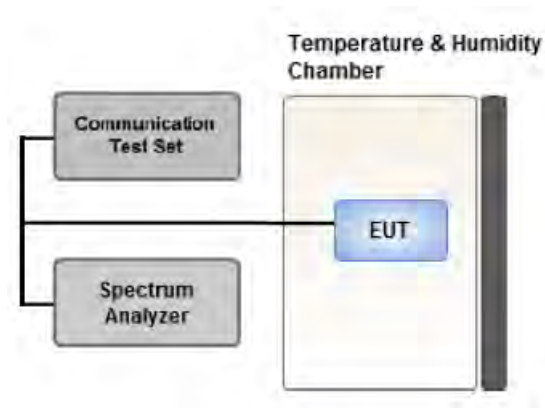

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.


The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

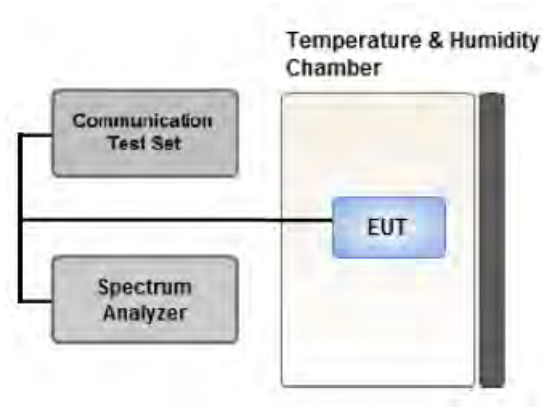

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 x Span / RBW

3.7 BAND EDGE

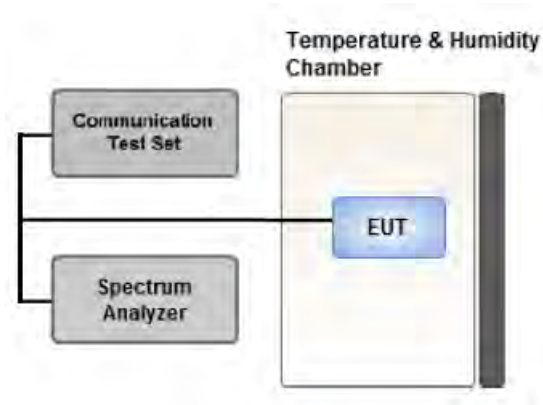

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In


the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz}/ \text{RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

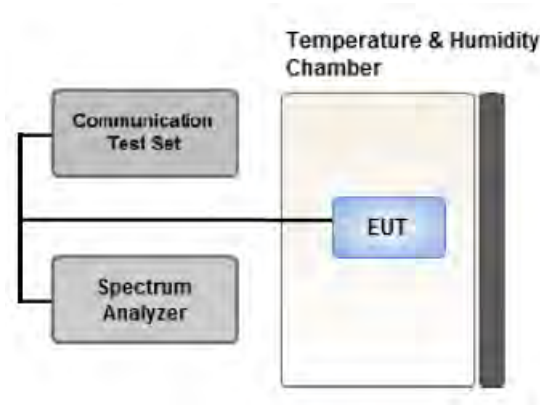

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.9 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location.
 Mode : Stand alone, Simultaneous transmission scenarios
 Worst case : Stand alone
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 15 MHz(Main 1 Ant), 15 MHz(Sub 5 Ant))
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- The EUT was tested in three modes(Open, Half-folded, Closed), the worst case configuration results are reported.
 Worst case: Main 1 Ant, Sub 5 Ant: Half-folded.
- Please refer to the table below.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SC-54E & additional models were tested and the worst case results are reported.
 (Worst case : SC-54E)

[Main 1 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM,	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	QPSK	See Section 8.2		Z

[Sub 5 Ant Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM,	See Section 9.1		Y
Radiated Spurious and Harmonic Emissions	QPSK	See Section 9.2		Y

3.10 WORST CASE(CONDUCTED TEST)

- All modes of operation were investigated and the worst case configuration results are reported.
- LTE Band 66 (1710 – 1780 MHz) overlaps the entire frequency range of LTE Band 4 (1710 - 1755 MHz) and they have the same Tune-up power. Therefore, test data provided in this report covers Band 4 as well as Band 66.
- SC-54E & additional models were tested and the worst case results are reported.
(Worst case : SC-54E)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset		
Occupied Bandwidth	QPSK, 16QAM, 64QAM,	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Peak-To-Average Ratio	QPSK, 16QAM, 64QAM,	1.4, 3, 5, 10, 15, 20	Mid	Full RB	0		
Band Edge	QPSK	1.4	Low	1	0		
			High	1	5		
		3	Low	1	0		
			High	1	14		
		5	Low	1	0		
			High	1	24		
		10	Low	1	0		
			High	1	49		
		15	Low	1	0		
			High	1	74		
		20	Low	1	0		
			High	1	99		
				1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
		Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	1	0

4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/17/2025	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(h)	$< 43 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(h)	$< 43 + 10\log_{10}(P[\text{Watts}])$ for all out-of band emissions	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA(Main 1 Ant)

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7	LTE B66/B4 1.4 MHz	QPSK	-20.74	12.99	9.94	2.24	V	< 1.00	0.117	20.69	1	0
		16-QAM	-21.53	12.20	9.94	2.24	V		0.098	19.90		
		64-QAM	-22.56	11.17	9.94	2.24	V		0.077	18.87		
1745.0		QPSK	-19.35	14.33	10.15	2.15	V		0.171	22.33	1	0
		16-QAM	-20.17	13.51	10.15	2.15	V		0.142	21.51		
		64-QAM	-21.20	12.48	10.15	2.15	V		0.112	20.48		
1779.3		QPSK	-20.44	13.25	10.21	2.26	V		0.132	21.20	1	0
		16-QAM	-21.22	12.47	10.21	2.26	V		0.110	20.42		
		64-QAM	-22.28	11.41	10.21	2.26	V		0.086	19.36		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5	LTE B66/B4 3 MHz	QPSK	-20.83	12.90	9.94	2.24	V	< 1.00	0.115	20.60	1	0
		16-QAM	-21.58	12.15	9.94	2.24	V		0.097	19.85		
		64-QAM	-22.62	11.11	9.94	2.24	V		0.076	18.81		
1745.0		QPSK	-19.42	14.26	10.15	2.15	V		0.168	22.26	1	0
		16-QAM	-20.18	13.50	10.15	2.15	V		0.141	21.50		
		64-QAM	-20.20	13.48	10.15	2.15	V		0.141	21.48		
1778.5		QPSK	-20.42	13.27	10.21	2.26	V		0.132	21.22	1	0
		16-QAM	-21.22	12.47	10.21	2.26	V		0.110	20.42		
		64-QAM	-22.26	11.43	10.21	2.26	V		0.087	19.38		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1712.5	LTE B66/B4 5 MHz	QPSK	-20.67	13.06	9.94	2.24	V	< 1.00	0.119	20.76	1	0
		16-QAM	-21.46	12.27	9.94	2.24	V		0.099	19.97		
		64-QAM	-22.55	11.18	9.94	2.24	V		0.077	18.88		
1745.0		QPSK	-19.36	14.32	10.15	2.15	V		0.171	22.32	1	0
		16-QAM	-20.10	13.58	10.15	2.15	V		0.144	21.58		
		64-QAM	-21.22	12.46	10.15	2.15	V		0.111	20.46		
1777.5		QPSK	-20.18	13.51	10.21	2.26	V		0.140	21.46	1	0
		16-QAM	-20.96	12.73	10.21	2.26	V		0.117	20.68		
		64-QAM	-22.09	11.60	10.21	2.26	V		0.090	19.55		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1715.0	LTE B66/B4 10 MHz	QPSK	-20.77	12.87	9.98	2.23	V	< 1.00	0.115	20.61	1	0
		16-QAM	-21.58	12.06	9.98	2.23	V		0.095	19.80		
		64-QAM	-22.64	11.00	9.98	2.23	V		0.075	18.74		
1745.0		QPSK	-19.36	14.32	10.15	2.15	V		0.171	22.32	1	0
		16-QAM	-20.22	13.46	10.15	2.15	V		0.140	21.46		
		64-QAM	-21.22	12.46	10.15	2.15	V		0.111	20.46		
1775.0		QPSK	-20.19	13.46	10.21	2.25	V		0.139	21.42	1	0
		16-QAM	-20.98	12.67	10.21	2.25	V		0.116	20.63		
		64-QAM	-22.01	11.64	10.21	2.25	V		0.091	19.60		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1717.5	LTE B66/B4 15 MHz	QPSK	-20.66	12.98	10.01	2.22	V	< 1.00	0.119	20.77	1	0
		16-QAM	-21.58	12.06	10.01	2.22	V		0.097	19.85		
		64-QAM	-22.58	11.06	10.01	2.22	V		0.077	18.85		
1745.0		QPSK	-19.27	14.41	10.15	2.15	V		0.174	22.41	1	0
		16-QAM	-20.15	13.53	10.15	2.15	V		0.142	21.53		
		64-QAM	-21.16	12.52	10.15	2.15	V		0.113	20.52		
1772.5		QPSK	-20.03	13.58	10.20	2.23	V		0.143	21.55	1	0
		16-QAM	-20.95	12.66	10.20	2.23	V		0.116	20.63		
		64-QAM	-21.95	11.66	10.20	2.23	V		0.092	19.63		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1720.0	LTE B66/B4 20 MHz	QPSK	-20.81	12.70	10.01	2.22	V	< 1.00	0.112	20.49	1	0
		16-QAM	-21.68	11.83	10.01	2.22	V		0.092	19.62		
		64-QAM	-22.69	10.82	10.01	2.22	V		0.073	18.61		
1745.0		QPSK	-19.44	14.24	10.15	2.15	V		0.167	22.24	1	0
		16-QAM	-20.25	13.43	10.15	2.15	V		0.139	21.43		
		64-QAM	-21.28	12.40	10.15	2.15	V		0.110	20.40		
1770.0		QPSK	-19.94	13.67	10.20	2.23	V		0.146	21.64	1	0
		16-QAM	-20.81	12.80	10.20	2.23	V		0.119	20.77		
		64-QAM	-21.81	11.80	10.20	2.23	V		0.095	19.77		

8.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY:	<u>1745.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>22.41 dBm = 0.174 W</u>
▣ MODE:	<u>LTE B66/B4</u>
▣ MODULATION SIGNAL:	<u>15 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>35.41 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
132047 (1717.5)	3 435.00	-54.11	12.41	-60.39	3.12	H	-51.10	73.51	1	0
	5 152.50	-57.25	12.39	-55.23	3.84	V	-46.68	69.10		
	6 870.00	-57.91	11.85	-50.85	4.50	H	-43.50	65.91		
132322 (1745.0)	3 490.00	-54.76	12.34	-60.77	3.08	V	-51.51	73.93	1	0
	5 235.00	-58.42	12.84	-57.50	3.95	H	-48.61	71.03		
	6 980.00	-55.89	11.40	-48.28	4.56	V	-41.44	63.86		
132597 (1772.5)	3 545.00	-55.03	12.34	-60.68	3.21	H	-51.54	73.96	1	0
	5 317.50	-56.13	13.08	-55.54	3.96	V	-46.42	68.83		
	7 090.00	-57.08	10.91	-47.90	4.59	H	-41.58	63.99		

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.62
			16-QAM			5.72
			64-QAM			6.52
	3 MHz		QPSK	15		4.54
			16-QAM			5.51
			64-QAM			6.47
	5 MHz		QPSK	25		4.57
			16-QAM			5.64
			64-QAM			6.46
	10 MHz		QPSK	50		4.60
			16-QAM			5.67
			64-QAM			6.44
	15 MHz		QPSK	75		4.59
			16-QAM			5.62
			64-QAM			6.49
	20 MHz		QPSK	100		4.66
			16-QAM			5.71
			64-QAM			6.48

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 78 ~ 95.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0972
			16-QAM			1.0979
			64-QAM			1.1012
	3 MHz		QPSK	15		2.7066
			16-QAM			2.7145
			64-QAM			2.7106
	5 MHz		QPSK	25		4.5119
			16-QAM			4.5008
			64-QAM			4.5163
	10 MHz		QPSK	50		8.9860
			16-QAM			8.9930
			64-QAM			9.0017
	15 MHz		QPSK	75		13.505
			16-QAM			13.505
			64-QAM			13.486
20 MHz	QPSK	100	17.946			
	16-QAM		18.012			
	64-QAM		17.993			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 96 ~ 113.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.7015	27.976	-67.275	-39.299	-13.00
		1745.0	3.7084	27.976	-67.264	-39.288	
		1779.3	3.6960	27.976	-66.772	-38.796	
	3	1711.5	3.6970	27.976	-67.133	-39.157	
		1745.0	3.6825	27.976	-67.056	-39.080	
		1778.5	3.6905	27.976	-67.266	-39.290	
	5	1712.5	3.7069	27.976	-67.375	-39.399	
		1745.0	3.6865	27.976	-66.961	-38.985	
		1777.5	3.1686	27.976	-67.373	-39.397	
	10	1715.0	3.1805	27.976	-67.069	-39.093	
		1745.0	3.1900	27.976	-67.051	-39.075	
		1775.0	3.6925	27.976	-67.209	-39.233	
	15	1717.5	3.6950	27.976	-67.073	-39.097	
		1745.0	3.7049	27.976	-66.977	-39.001	
		1772.5	3.2020	27.976	-67.257	-39.281	
	20	1720.0	3.7104	27.976	-67.307	-39.331	
		1745.0	3.7139	27.976	-67.036	-39.060	
		1770.0	3.1710	27.976	-67.357	-39.381	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 114 ~ 149.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 150 ~ 185.

8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1710 700 003	0.0	0.000 000	0.000
100 %		-30	1710 700 008	5.0	0.000 000	0.003
100 %		-20	1710 699 999	-3.6	0.000 000	-0.002
100 %		-10	1710 700 005	2.9	0.000 000	0.002
100 %		0	1710 700 005	2.9	0.000 000	0.002
100 %		+10	1710 700 006	3.1	0.000 000	0.002
100 %		+30	1710 700 006	3.3	0.000 000	0.002
100 %		+40	1710 700 006	3.0	0.000 000	0.002
100 %		+50	1710 700 008	5.0	0.000 000	0.003
Batt. Endpoint		3.300	+20	1710 700 007	4.0	0.000 000

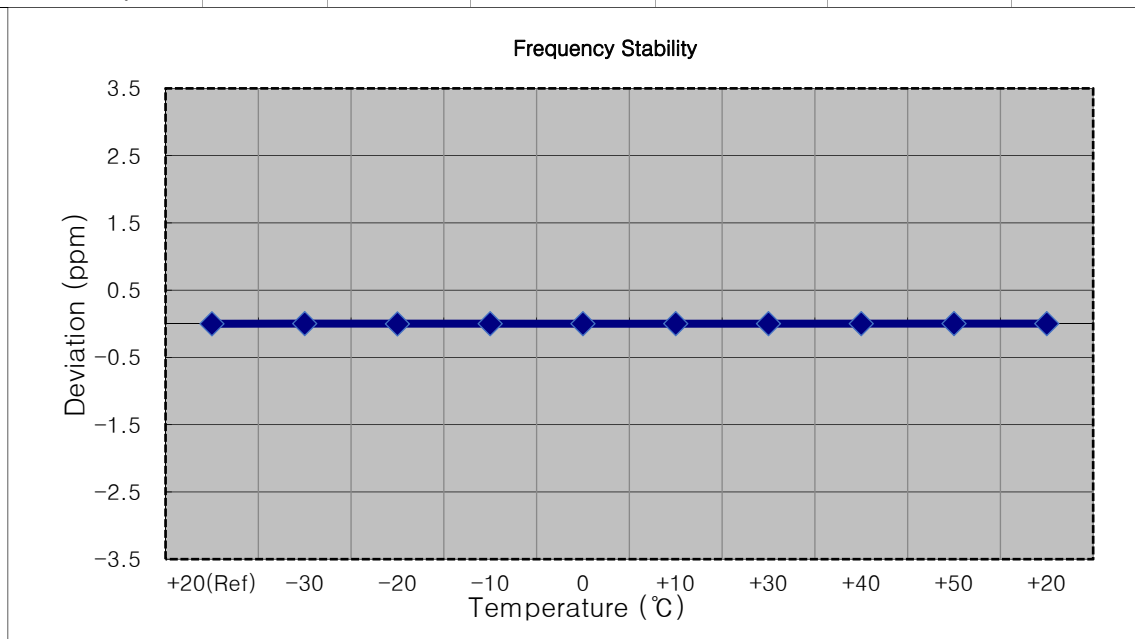


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 500 004	0.0	0.000 000	0.000
100 %		-30	1711 500 007	2.9	0.000 000	0.002
100 %		-20	1711 500 007	3.1	0.000 000	0.002
100 %		-10	1711 499 998	-5.9	0.000 000	-0.003
100 %		0	1711 500 010	5.6	0.000 000	0.003
100 %		+10	1711 500 000	-3.7	0.000 000	-0.002
100 %		+30	1711 500 000	-4.0	0.000 000	-0.002
100 %		+40	1711 500 007	3.3	0.000 000	0.002
100 %		+50	1711 500 000	-4.0	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1711 500 010	5.7	0.000 000

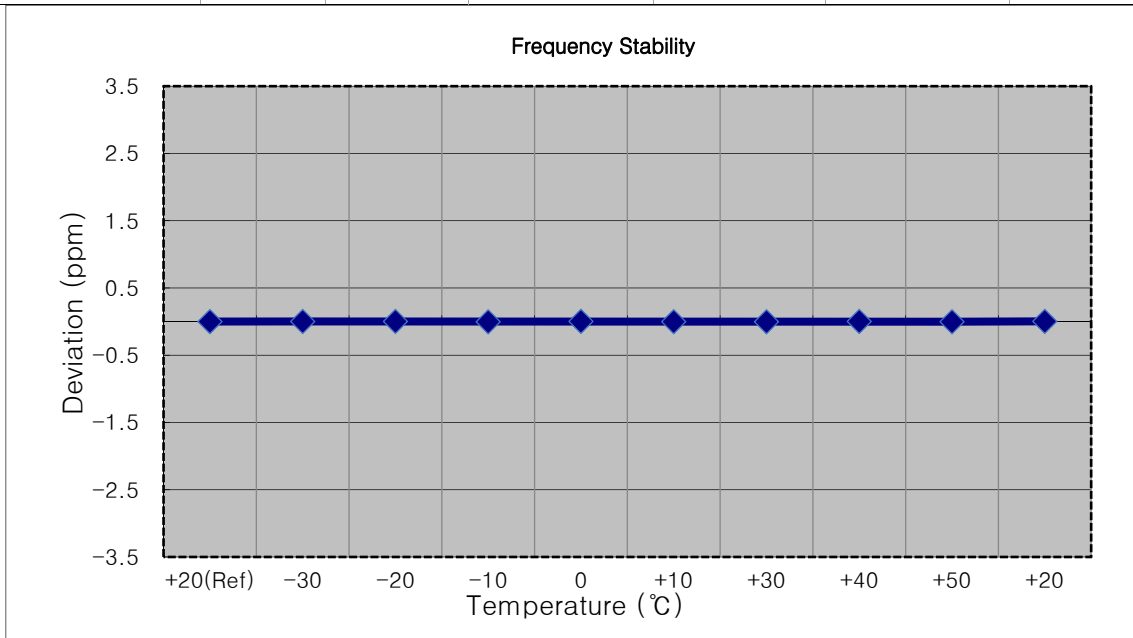


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 993	0.0	0.000 000	0.000
100 %		-30	1712 499 986	-7.0	0.000 000	-0.004
100 %		-20	1712 499 987	-6.5	0.000 000	-0.004
100 %		-10	1712 499 987	-6.3	0.000 000	-0.004
100 %		0	1712 499 990	-3.6	0.000 000	-0.002
100 %		+10	1712 499 989	-4.5	0.000 000	-0.003
100 %		+30	1712 499 987	-6.1	0.000 000	-0.004
100 %		+40	1712 499 986	-7.3	0.000 000	-0.004
100 %		+50	1712 499 987	-6.2	0.000 000	-0.004
Batt. Endpoint		3.300	+20	1712 499 997	3.6	0.000 000

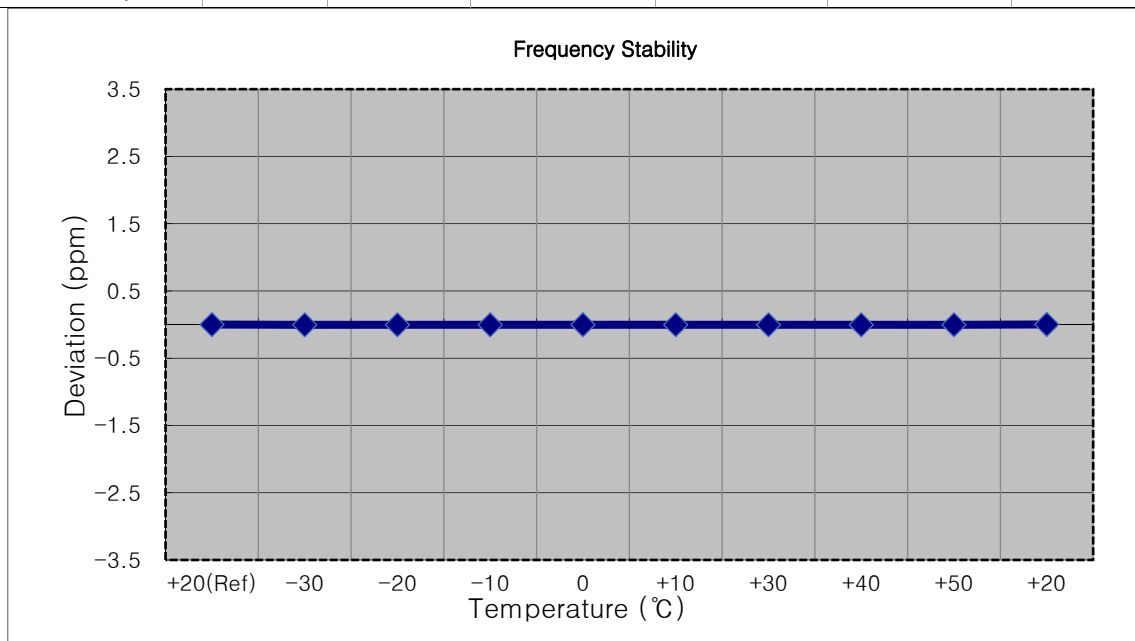


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1715 000 004	0.0	0.000 000	0.000
100 %		-30	1715 000 001	-3.0	0.000 000	-0.002
100 %		-20	1715 000 001	-2.6	0.000 000	-0.002
100 %		-10	1715 000 009	5.6	0.000 000	0.003
100 %		0	1715 000 006	2.5	0.000 000	0.001
100 %		+10	1715 000 001	-3.1	0.000 000	-0.002
100 %		+30	1715 000 002	-1.6	0.000 000	-0.001
100 %		+40	1715 000 006	2.1	0.000 000	0.001
100 %		+50	1714 999 999	-4.7	0.000 000	-0.003
Batt. Endpoint		3.300	+20	1715 000 000	-3.5	0.000 000

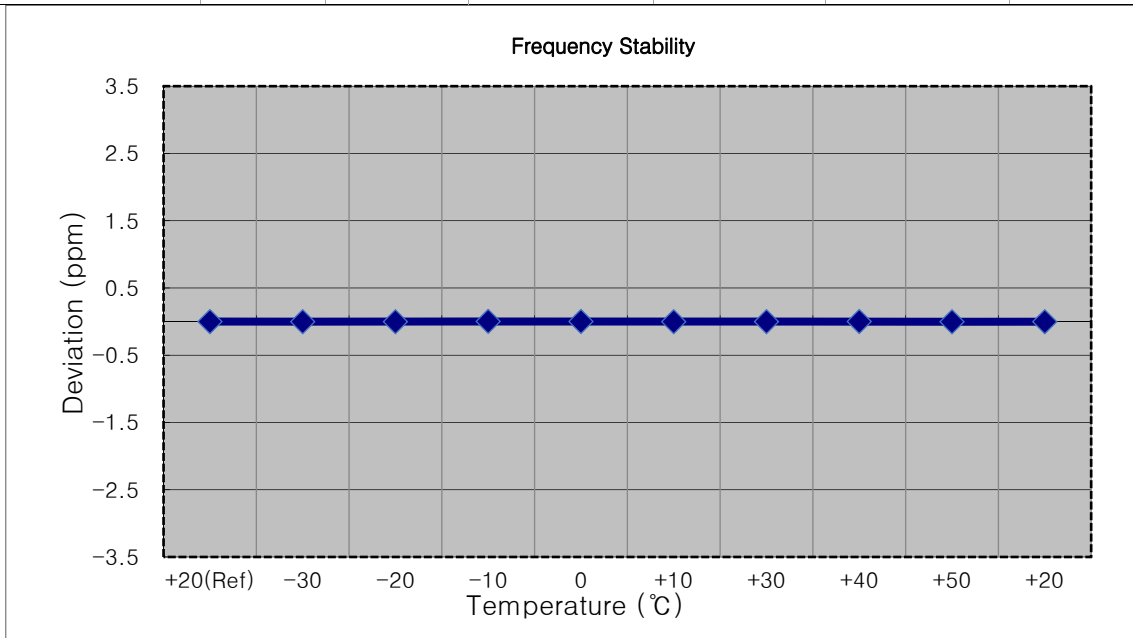


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 500 003	0.0	0.000 000	0.000
100 %		-30	1717 500 008	4.8	0.000 000	0.003
100 %		-20	1717 500 008	4.6	0.000 000	0.003
100 %		-10	1717 500 008	4.8	0.000 000	0.003
100 %		0	1717 500 009	5.8	0.000 000	0.003
100 %		+10	1717 500 006	2.6	0.000 000	0.002
100 %		+30	1717 500 007	4.2	0.000 000	0.002
100 %		+40	1717 500 007	3.7	0.000 000	0.002
100 %		+50	1717 500 007	4.4	0.000 000	0.003
Batt. Endpoint		3.300	+20	1717 500 006	3.0	0.000 000

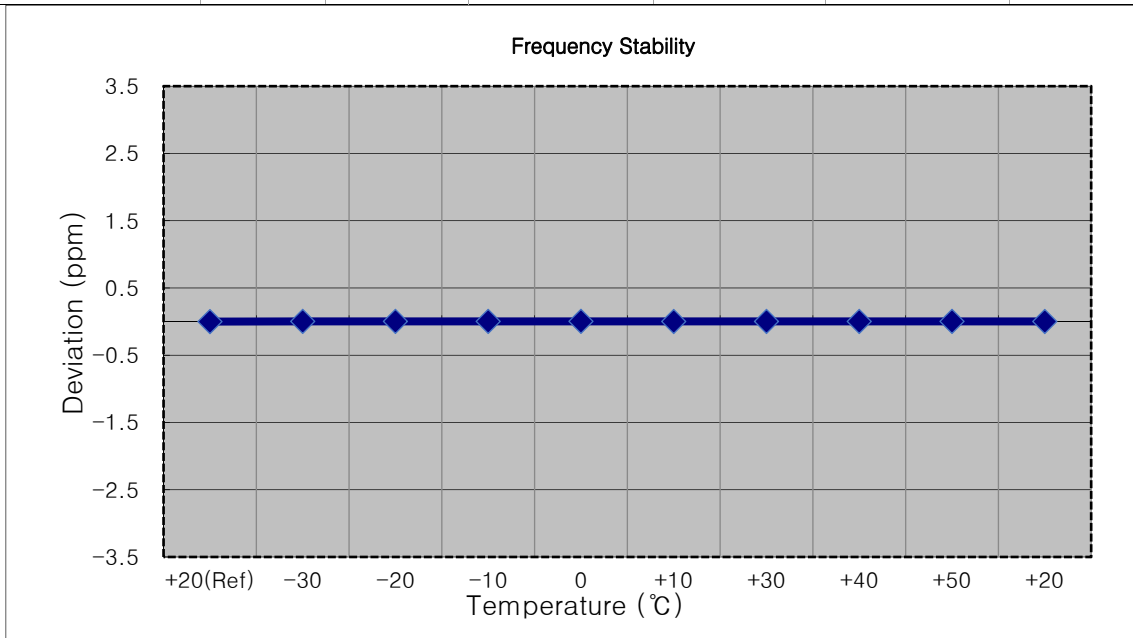


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1719 999 995	0.0	0.000 000	0.000
100 %		-30	1719 999 990	-4.9	0.000 000	-0.003
100 %		-20	1719 999 990	-4.8	0.000 000	-0.003
100 %		-10	1719 999 990	-4.4	0.000 000	-0.003
100 %		0	1719 999 991	-3.4	0.000 000	-0.002
100 %		+10	1719 999 989	-5.8	0.000 000	-0.003
100 %		+30	1719 999 990	-4.6	0.000 000	-0.003
100 %		+40	1719 999 993	-1.5	0.000 000	-0.001
100 %		+50	1719 999 992	-2.7	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1719 999 991	-3.8	0.000 000

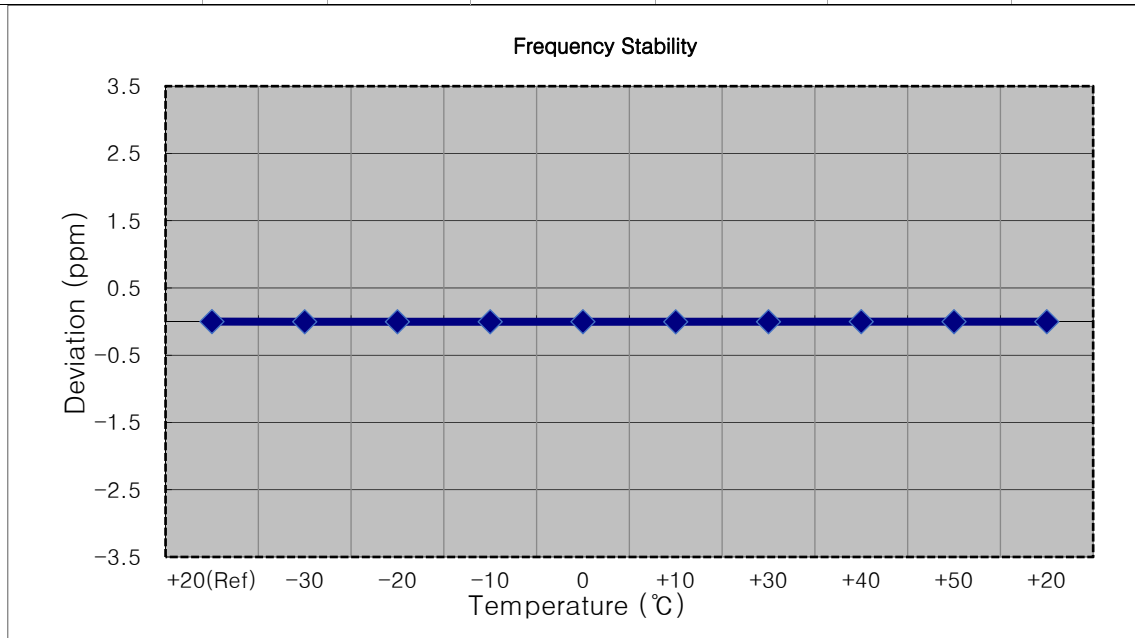


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1745 000 005	3.4	0.000 000	0.002
100 %		-20	1744 999 997	-4.9	0.000 000	-0.003
100 %		-10	1745 000 004	2.4	0.000 000	0.001
100 %		0	1745 000 005	2.7	0.000 000	0.002
100 %		+10	1745 000 005	2.9	0.000 000	0.002
100 %		+30	1744 999 999	-2.5	0.000 000	-0.001
100 %		+40	1745 000 005	3.0	0.000 000	0.002
100 %		+50	1744 999 999	-2.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1745 000 008	6.0	0.000 000

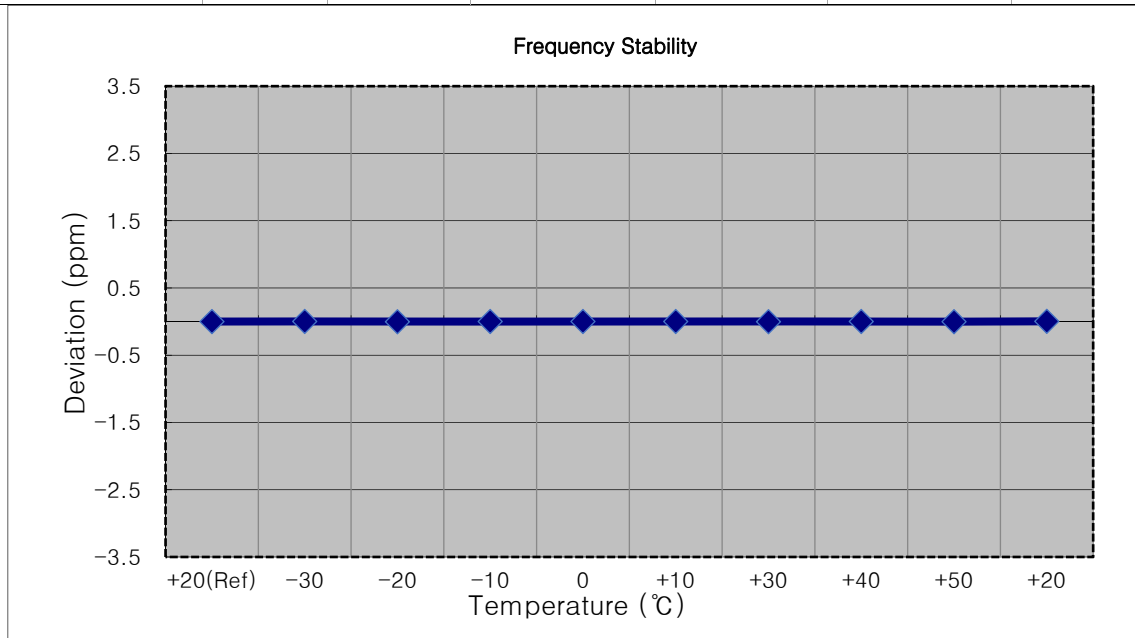


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 002	-2.4	0.000 000	-0.001
100 %		-20	1745 000 008	3.5	0.000 000	0.002
100 %		-10	1745 000 001	-3.5	0.000 000	-0.002
100 %		0	1744 999 998	-6.0	0.000 000	-0.003
100 %		+10	1745 000 008	3.3	0.000 000	0.002
100 %		+30	1745 000 000	-4.0	0.000 000	-0.002
100 %		+40	1745 000 000	-4.6	0.000 000	-0.003
100 %		+50	1745 000 008	3.2	0.000 000	0.002
Batt. Endpoint	3.300	+20	1745 000 009	4.2	0.000 000	0.002

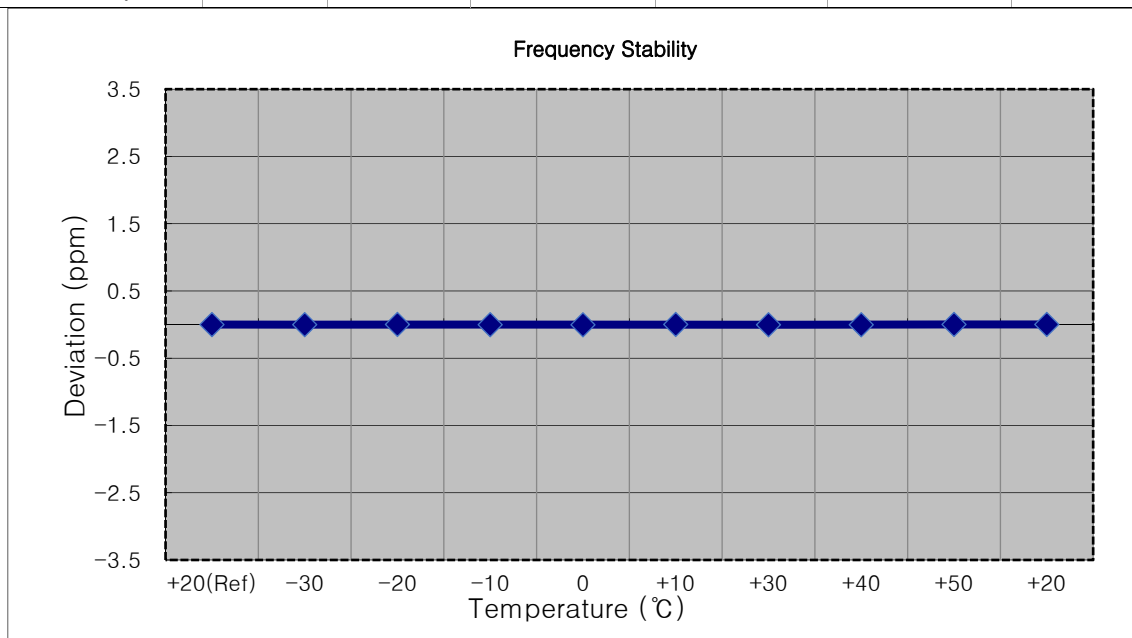


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1745 000 001	4.3	0.000 000	0.002
100 %		-20	1745 000 000	3.1	0.000 000	0.002
100 %		-10	1744 999 994	-2.5	0.000 000	-0.001
100 %		0	1745 000 000	3.2	0.000 000	0.002
100 %		+10	1744 999 993	-3.1	0.000 000	-0.002
100 %		+30	1744 999 992	-4.7	0.000 000	-0.003
100 %		+40	1744 999 994	-2.6	0.000 000	-0.001
100 %		+50	1744 999 993	-3.8	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1745 000 001	4.1	0.000 000

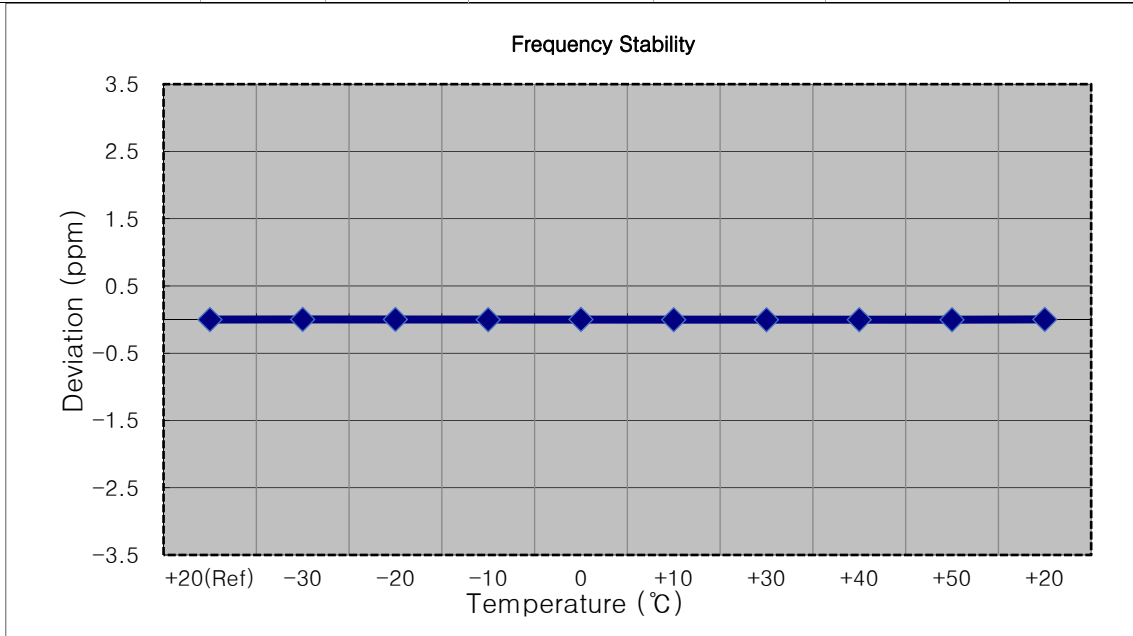


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 995	0.0	0.000 000	0.000
100 %		-30	1744 999 990	-5.7	0.000 000	-0.003
100 %		-20	1744 999 990	-5.2	0.000 000	-0.003
100 %		-10	1744 999 992	-3.7	0.000 000	-0.002
100 %		0	1744 999 991	-4.4	0.000 000	-0.003
100 %		+10	1744 999 998	2.3	0.000 000	0.001
100 %		+30	1744 999 997	1.6	0.000 000	0.001
100 %		+40	1744 999 991	-4.2	0.000 000	-0.002
100 %		+50	1744 999 992	-3.4	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1744 999 993	-2.6	0.000 000

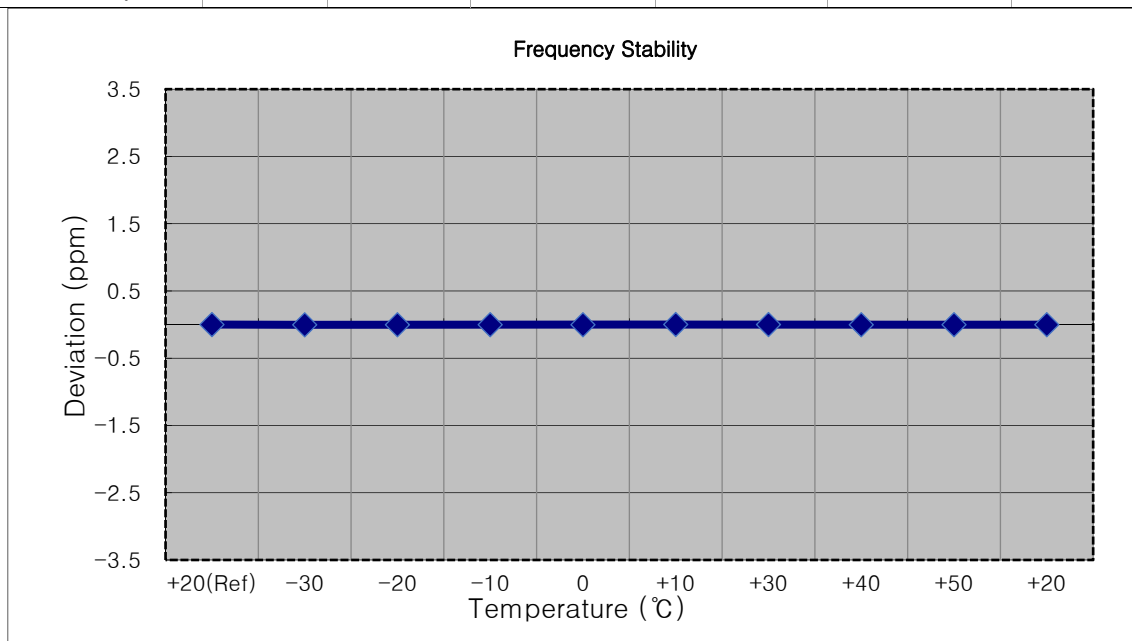


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 993	-3.2	0.000 000	-0.002
100 %		-20	1744 999 994	-2.4	0.000 000	-0.001
100 %		-10	1744 999 993	-3.8	0.000 000	-0.002
100 %		0	1744 999 993	-3.4	0.000 000	-0.002
100 %		+10	1744 999 993	-3.1	0.000 000	-0.002
100 %		+30	1744 999 993	-3.3	0.000 000	-0.002
100 %		+40	1744 999 995	-1.7	0.000 000	-0.001
100 %		+50	1744 999 994	-2.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1744 999 995	-2.0	0.000 000

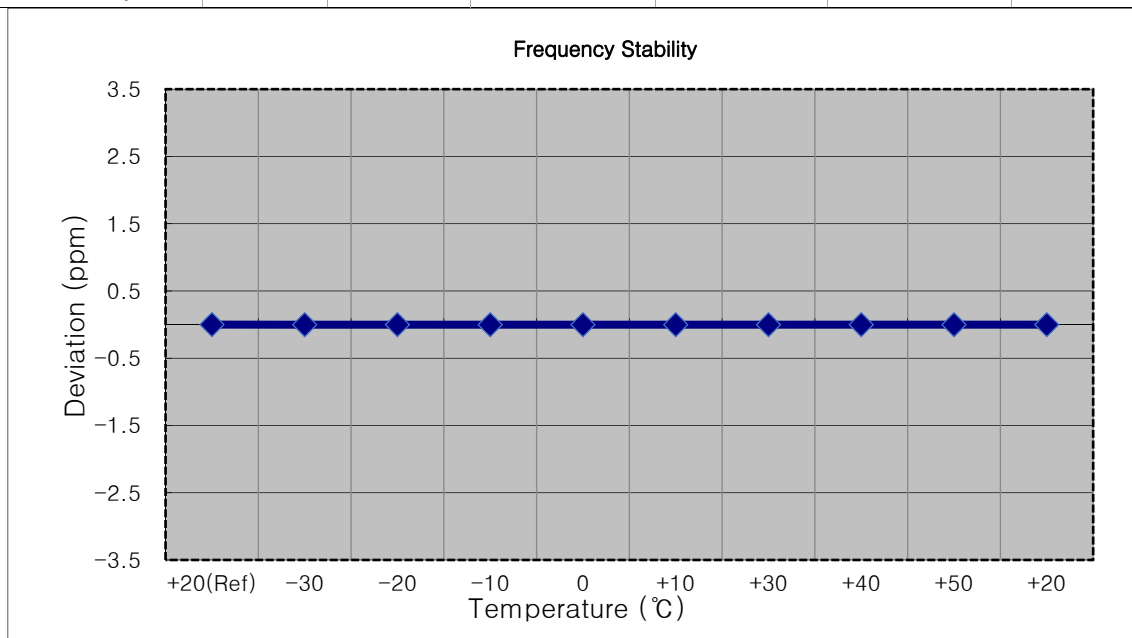


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1744 999 992	-3.7	0.000 000	-0.002
100 %		-20	1744 999 991	-4.3	0.000 000	-0.002
100 %		-10	1744 999 992	-3.1	0.000 000	-0.002
100 %		0	1744 999 994	-2.0	0.000 000	-0.001
100 %		+10	1744 999 993	-2.6	0.000 000	-0.001
100 %		+30	1744 999 991	-4.6	0.000 000	-0.003
100 %		+40	1744 999 998	2.7	0.000 000	0.002
100 %		+50	1744 999 993	-2.5	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1744 999 993	-2.9	0.000 000

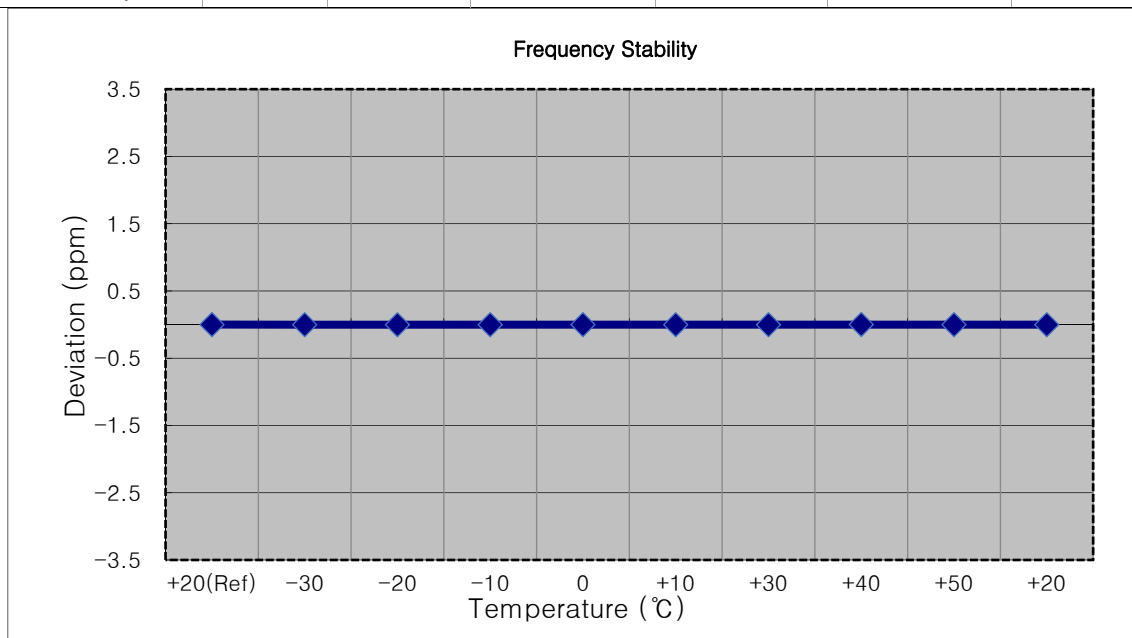


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1779 300 004	0.0	0.000 000	0.000
100 %		-30	1779 300 008	4.4	0.000 000	0.002
100 %		-20	1779 300 008	4.1	0.000 000	0.002
100 %		-10	1779 300 007	3.2	0.000 000	0.002
100 %		0	1779 300 009	4.8	0.000 000	0.003
100 %		+10	1779 299 998	-5.9	0.000 000	-0.003
100 %		+30	1779 300 008	4.6	0.000 000	0.003
100 %		+40	1779 300 001	-3.0	0.000 000	-0.002
100 %		+50	1779 300 007	2.9	0.000 000	0.002
Batt. Endpoint		3.300	+20	1779 299 998	-5.3	0.000 000

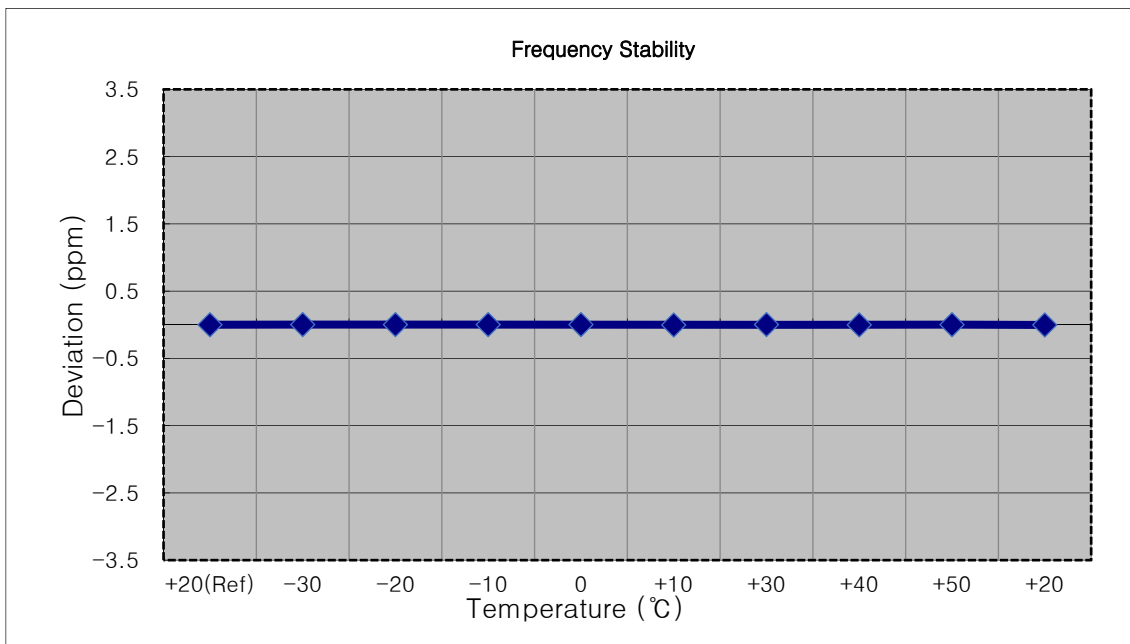


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1778 499 987	0.0	0.000 000	0.000
100 %		-30	1778 499 995	8.4	0.000 000	0.005
100 %		-20	1778 499 978	-8.2	0.000 000	-0.005
100 %		-10	1778 499 981	-6.0	0.000 000	-0.003
100 %		0	1778 499 976	-10.8	-0.000 001	-0.006
100 %		+10	1778 499 978	-8.8	0.000 000	-0.005
100 %		+30	1778 499 980	-7.0	0.000 000	-0.004
100 %		+40	1778 499 975	-11.1	-0.000 001	-0.006
100 %		+50	1778 499 998	11.7	0.000 001	0.007
Batt. Endpoint		3.300	+20	1778 499 978	-9.0	-0.000 001

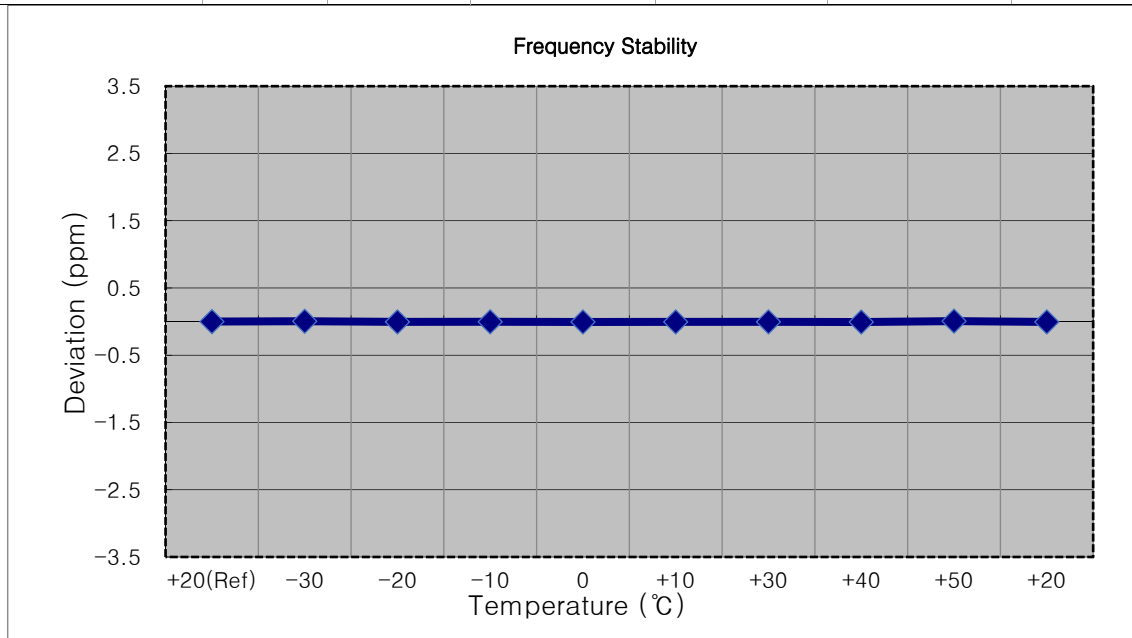


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1777 499 996	0.0	0.000 000	0.000
100 %		-30	1777 499 999	3.4	0.000 000	0.002
100 %		-20	1777 499 994	-1.9	0.000 000	-0.001
100 %		-10	1777 499 999	2.9	0.000 000	0.002
100 %		0	1777 500 000	4.4	0.000 000	0.002
100 %		+10	1777 499 991	-4.6	0.000 000	-0.003
100 %		+30	1777 499 999	3.6	0.000 000	0.002
100 %		+40	1777 500 000	4.6	0.000 000	0.003
100 %		+50	1777 499 997	1.7	0.000 000	0.001
Batt. Endpoint		3.300	+20	1777 499 999	3.0	0.000 000

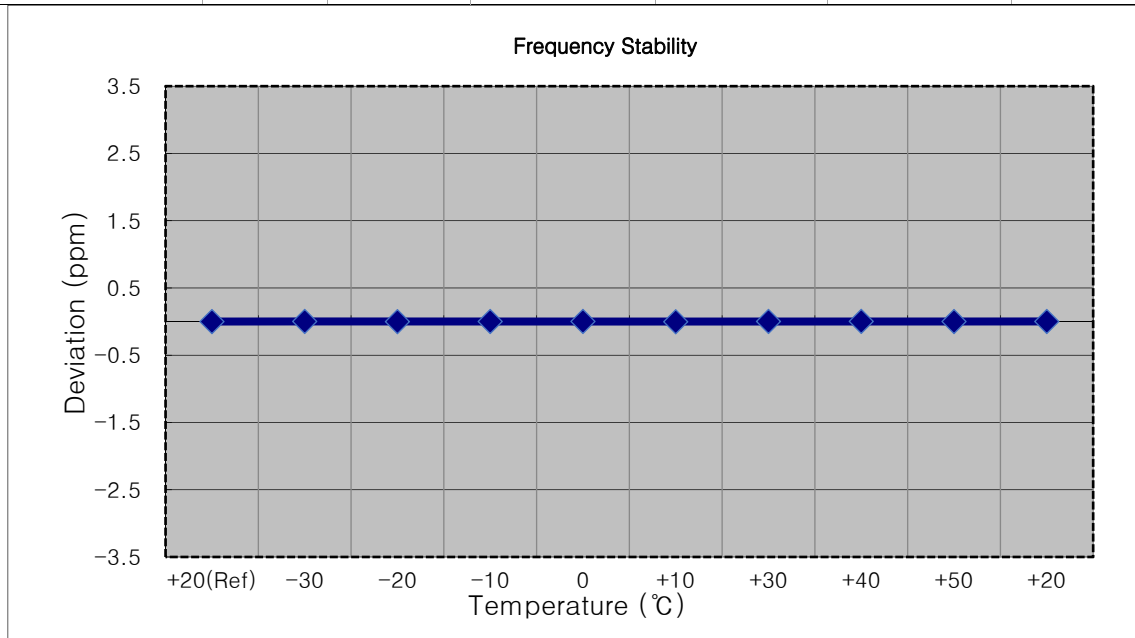


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1774 999 997	0.0	0.000 000	0.000
100 %		-30	1775 000 002	5.0	0.000 000	0.003
100 %		-20	1775 000 001	4.1	0.000 000	0.002
100 %		-10	1774 999 994	-3.4	0.000 000	-0.002
100 %		0	1774 999 992	-5.2	0.000 000	-0.003
100 %		+10	1774 999 992	-5.1	0.000 000	-0.003
100 %		+30	1774 999 996	-1.5	0.000 000	-0.001
100 %		+40	1775 000 000	2.6	0.000 000	0.001
100 %		+50	1775 000 001	4.4	0.000 000	0.002
Batt. Endpoint	3.300	+20	1775 000 000	2.7	0.000 000	0.002

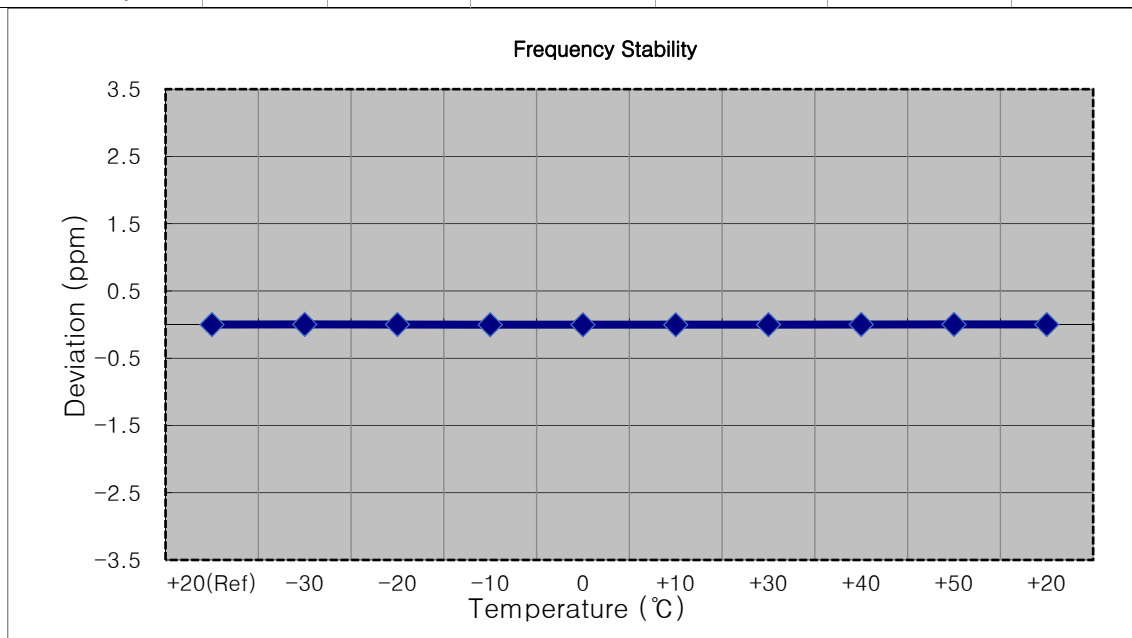


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1772 499 993	0.0	0.000 000	0.000
100 %		-30	1772 499 986	-6.8	0.000 000	-0.004
100 %		-20	1772 499 984	-9.1	-0.000 001	-0.005
100 %		-10	1772 499 983	-9.7	-0.000 001	-0.005
100 %		0	1772 499 984	-8.9	-0.000 001	-0.005
100 %		+10	1772 499 984	-9.0	-0.000 001	-0.005
100 %		+30	1772 499 985	-8.5	0.000 000	-0.005
100 %		+40	1772 499 983	-9.8	-0.000 001	-0.006
100 %		+50	1772 499 985	-8.5	0.000 000	-0.005
Batt. Endpoint		3.300	+20	1772 499 983	-9.6	-0.000 001

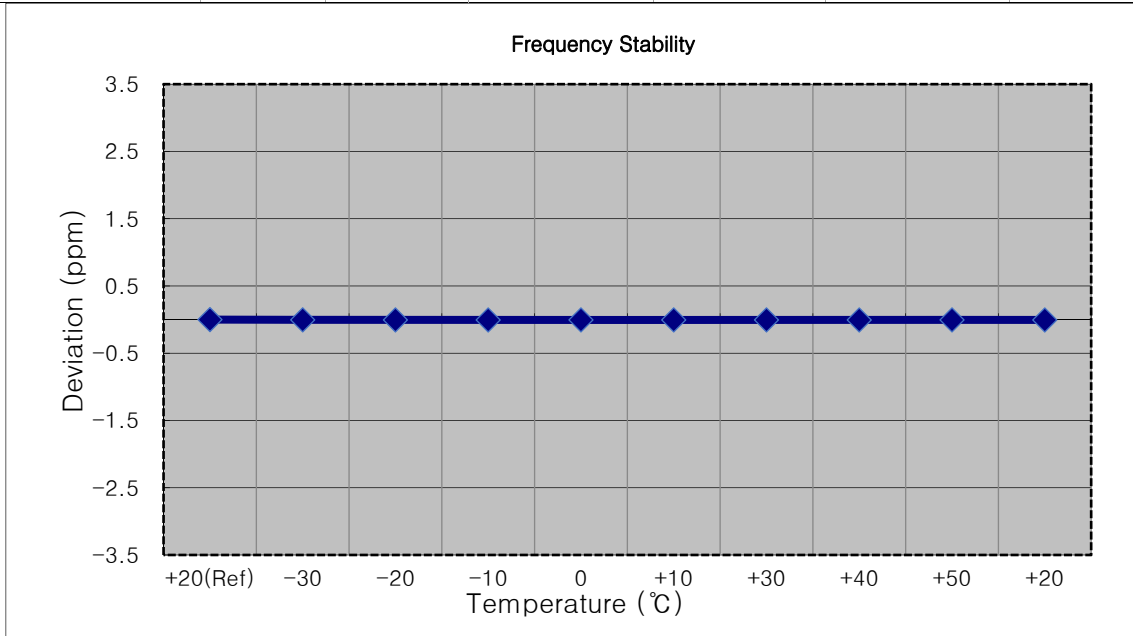

- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1769 999 996	0.0	0.000 000	0.000
100 %		-30	1769 999 999	3.8	0.000 000	0.002
100 %		-20	1769 999 991	-4.8	0.000 000	-0.003
100 %		-10	1769 999 992	-3.9	0.000 000	-0.002
100 %		0	1769 999 999	3.1	0.000 000	0.002
100 %		+10	1769 999 993	-2.6	0.000 000	-0.001
100 %		+30	1769 999 990	-5.8	0.000 000	-0.003
100 %		+40	1769 999 992	-3.7	0.000 000	-0.002
100 %		+50	1769 999 998	2.5	0.000 000	0.001
Batt. Endpoint		3.300	+20	1769 999 992	-3.5	0.000 000

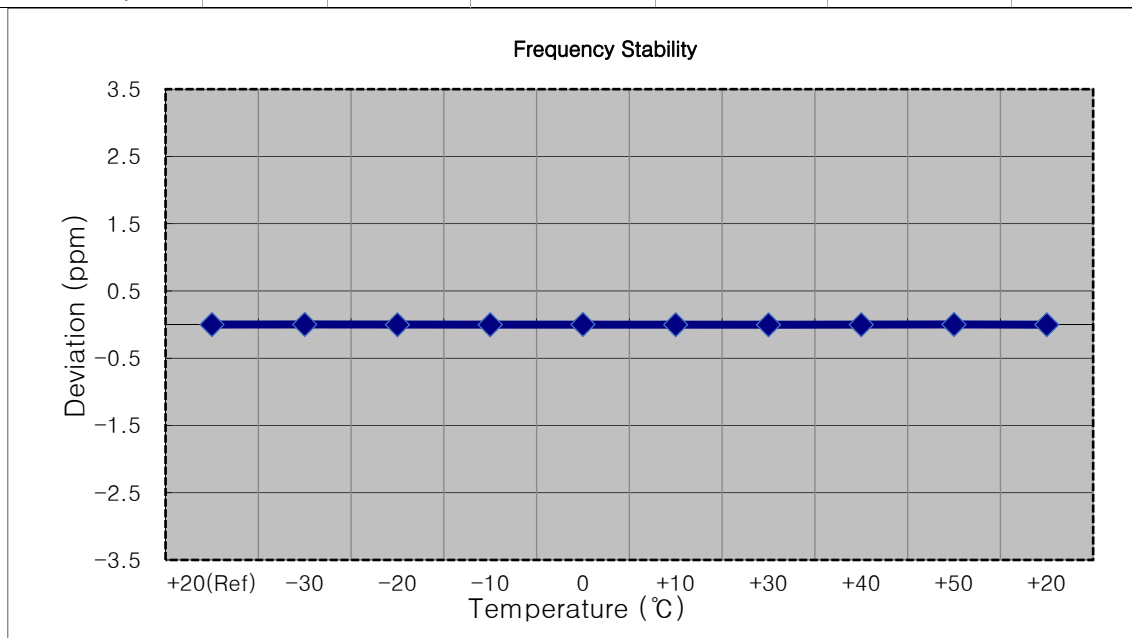

9. TEST DATA(Sub 5 Ant)

9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1710.7	LTE B66/B4 1.4 MHz	QPSK	-20.02	13.71	9.94	2.24	H	< 1.00	0.138	21.41	1	3
		16-QAM	-20.84	12.89	9.94	2.24	H		0.115	20.59		
		64-QAM	-21.88	11.85	9.94	2.24	H		0.090	19.55		
1745.0		QPSK	-19.81	13.87	10.15	2.15	H		0.154	21.87	1	0
		16-QAM	-20.59	13.09	10.15	2.15	H		0.129	21.09		
		64-QAM	-21.66	12.02	10.15	2.15	H		0.100	20.02		
1779.3		QPSK	-20.08	13.61	10.21	2.26	H		0.143	21.56	1	0
		16-QAM	-20.89	12.80	10.21	2.26	H		0.119	20.75		
		64-QAM	-21.92	11.77	10.21	2.26	H		0.094	19.72		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1711.5	LTE B66/B4 3 MHz	QPSK	-19.98	13.75	9.94	2.24	H	< 1.00	0.140	21.45	1	8
		16-QAM	-20.71	13.02	9.94	2.24	H		0.118	20.72		
		64-QAM	-21.72	12.01	9.94	2.24	H		0.094	19.71		
1745.0		QPSK	-19.84	13.84	10.15	2.15	H		0.153	21.84	1	0
		16-QAM	-20.63	13.05	10.15	2.15	H		0.127	21.05		
		64-QAM	-21.68	12.00	10.15	2.15	H		0.100	20.00		
1778.5		QPSK	-20.12	13.57	10.21	2.26	H		0.142	21.52	1	0
		16-QAM	-20.88	12.81	10.21	2.26	H		0.119	20.76		
		64-QAM	-21.90	11.79	10.21	2.26	H		0.094	19.74		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1712.5	LTE B66/B4 5 MHz	QPSK	-19.85	13.88	9.94	2.24	H	< 1.00	0.144	21.58	1	13
		16-QAM	-20.56	13.17	9.94	2.24	H		0.122	20.87		
		64-QAM	-21.67	12.06	9.94	2.24	H		0.095	19.76		
1745.0		QPSK	-19.82	13.86	10.15	2.15	H		0.153	21.86	1	0
		16-QAM	-20.55	13.13	10.15	2.15	H		0.130	21.13		
		64-QAM	-21.64	12.04	10.15	2.15	H		0.101	20.04		
1777.5		QPSK	-20.02	13.67	10.21	2.26	H		0.145	21.62	1	0
		16-QAM	-20.75	12.94	10.21	2.26	H		0.123	20.89		
		64-QAM	-21.85	11.84	10.21	2.26	H		0.095	19.79		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1715.0	LTE B66/B4 10 MHz	QPSK	-19.82	13.82	9.98	2.23	H	< 1.00	0.143	21.56	1	25
		16-QAM	-20.55	13.09	9.98	2.23	H		0.121	20.83		
		64-QAM	-21.63	12.01	9.98	2.23	H		0.094	19.75		
1745.0		QPSK	-19.88	13.80	10.15	2.15	H		0.151	21.80	1	0
		16-QAM	-20.69	12.99	10.15	2.15	H		0.126	20.99		
		64-QAM	-21.63	12.05	10.15	2.15	H		0.101	20.05		
1775.0		QPSK	-20.03	13.62	10.21	2.25	H		0.144	21.58	1	0
		16-QAM	-20.83	12.82	10.21	2.25	H		0.120	20.78		
		64-QAM	-21.88	11.77	10.21	2.25	H		0.094	19.73		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1717.5	LTE B66/B4 15 MHz	QPSK	-19.79	13.85	10.01	2.22	H	< 1.00	0.146	21.64	1	38
		16-QAM	-20.63	13.01	10.01	2.22	H		0.120	20.80		
		64-QAM	-21.66	11.98	10.01	2.22	H		0.095	19.77		
1745.0		QPSK	-19.78	13.90	10.15	2.15	H		0.155	21.90	1	0
		16-QAM	-20.62	13.06	10.15	2.15	H		0.128	21.06		
		64-QAM	-21.66	12.02	10.15	2.15	H		0.100	20.02		
1772.5		QPSK	-20.12	13.49	10.20	2.23	H		0.140	21.46	1	0
		16-QAM	-20.98	12.63	10.20	2.23	H		0.115	20.60		
		64-QAM	-22.03	11.58	10.20	2.23	H		0.090	19.55		

Freq (MHz)	Mod/ Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1720.0	LTE B66/B4 20 MHz	QPSK	-19.77	13.74	10.01	2.22	H	< 1.00	0.142	21.53	1	50
		16-QAM	-20.60	12.91	10.01	2.22	H		0.117	20.70		
		64-QAM	-21.62	11.89	10.01	2.22	H		0.093	19.68		
1745.0		QPSK	-19.84	13.84	10.15	2.15	H		0.153	21.84	1	0
		16-QAM	-20.74	12.94	10.15	2.15	H		0.124	20.94		
		64-QAM	-21.76	11.92	10.15	2.15	H		0.098	19.92		
1770.0		QPSK	-20.06	13.55	10.20	2.23	H		0.142	21.52	1	0
		16-QAM	-20.96	12.65	10.20	2.23	H		0.115	20.62		
		64-QAM	-21.99	11.62	10.20	2.23	H		0.091	19.59		

9.2 RADIATED SPURIOUS EMISSIONS

▣ OPERATING FREQUENCY:	<u>1745.0 MHz</u>
▣ MEASURED OUTPUT POWER:	<u>21.90 dBm = 0.155 W</u>
▣ MODE:	<u>LTE B66/B4</u>
▣ MODULATION SIGNAL:	<u>15 MHz QPSK</u>
▣ DISTANCE:	<u>3 meters</u>
▣ LIMIT: $43 + 10 \log_{10}(W) =$	<u>34.90 dBc</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc	RB	
									Size	Offset
132047 (1717.5)	3 435.00	-51.81	12.41	-58.09	3.12	V	-48.80	70.70	1	0
	5 152.50	-56.97	12.39	-54.95	3.84	H	-46.40	68.31		
	6 870.00	-57.47	11.85	-50.41	4.50	V	-43.06	64.96		
132322 (1745.0)	3 490.00	-54.62	12.34	-60.63	3.08	V	-51.37	73.28	1	38
	5 235.00	-55.93	12.84	-55.01	3.95	V	-46.12	68.03		
	6 980.00	-56.99	11.40	-49.38	4.56	V	-42.54	64.45		
132597 (1772.5)	3 545.00	-51.81	12.34	-57.46	3.21	H	-48.32	70.23	1	0
	5 317.50	-56.90	13.08	-56.31	3.96	V	-47.19	69.09		
	7 090.00	-56.65	10.91	-47.47	4.59	H	-41.15	63.05		

9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
66/4	1.4 MHz	1745.0	QPSK	6	0	4.78
			16-QAM			6.01
			64-QAM			6.51
	3 MHz		QPSK	15		4.73
			16-QAM			6.03
			64-QAM			6.48
	5 MHz		QPSK	25		4.83
			16-QAM			5.81
			64-QAM			6.43
	10 MHz		QPSK	50		4.82
			16-QAM			5.82
			64-QAM			6.35
	15 MHz		QPSK	75		4.78
			16-QAM			5.90
			64-QAM			6.41
20 MHz	QPSK	100	4.76			
	16-QAM		5.80			
	64-QAM		6.34			

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 187 ~ 204.

9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
66/4	1.4 MHz	1745.0	QPSK	6	0	1.0993
			16-QAM			1.0978
			64-QAM			1.1016
	3 MHz		QPSK	15		2.7178
			16-QAM			2.7161
			64-QAM			2.7192
	5 MHz		QPSK	25		4.5143
			16-QAM			4.5016
			64-QAM			4.5136
	10 MHz		QPSK	50		9.0026
			16-QAM			8.9883
			64-QAM			8.9874
	15 MHz		QPSK	75		13.495
			16-QAM			13.457
			64-QAM			13.474
20 MHz	QPSK	100	17.926			
	16-QAM		17.972			
	64-QAM		17.923			

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 205 ~ 222.

9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
66/4	1.4	1710.7	3.6735	27.976	-66.937	-38.961	-13.00
		1745.0	3.7239	27.976	-67.161	-39.185	
		1779.3	3.7064	27.976	-66.946	-38.970	
	3	1711.5	3.7084	27.976	-67.136	-39.160	
		1745.0	3.7154	27.976	-67.300	-39.324	
		1778.5	3.7005	27.976	-67.061	-39.085	
	5	1712.5	3.7015	27.976	-66.827	-38.851	
		1745.0	3.7059	27.976	-67.022	-39.046	
		1777.5	3.7010	27.976	-67.179	-39.203	
	10	1715.0	3.6750	27.976	-66.967	-38.991	
		1745.0	3.6890	27.976	-66.683	-38.707	
		1775.0	3.6815	27.976	-67.151	-39.175	
	15	1717.5	3.7069	27.976	-67.209	-39.233	
		1745.0	3.6915	27.976	-67.316	-39.340	
		1772.5	3.7005	27.976	-67.189	-39.213	
	20	1720.0	3.7029	27.976	-67.465	-39.489	
		1745.0	3.6695	27.976	-67.042	-39.066	
		1770.0	3.6885	27.976	-66.913	-38.937	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 223 ~ 258.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 259 ~ 294.

9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1710,700,000 Hz
- ▣ CHANNEL: 131979 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm	
100 %	3.880	+20(Ref)	1710 700 003	0.0	0.000 000	0.000	
100 %		-30	1710 699 999	-4.2	0.000 000	-0.002	
100 %		-20	1710 700 008	5.0	0.000 000	0.003	
100 %		-10	1710 700 007	3.7	0.000 000	0.002	
100 %		0	1710 700 008	4.8	0.000 000	0.003	
100 %		+10	1710 700 006	3.1	0.000 000	0.002	
100 %		+30	1710 700 010	6.3	0.000 000	0.004	
100 %		+40	1710 700 005	1.7	0.000 000	0.001	
100 %		+50	1710 700 007	4.0	0.000 000	0.000 000	0.002
Batt. Endpoint		3.300	+20	1710 700 001	-2.0	0.000 000	-0.001

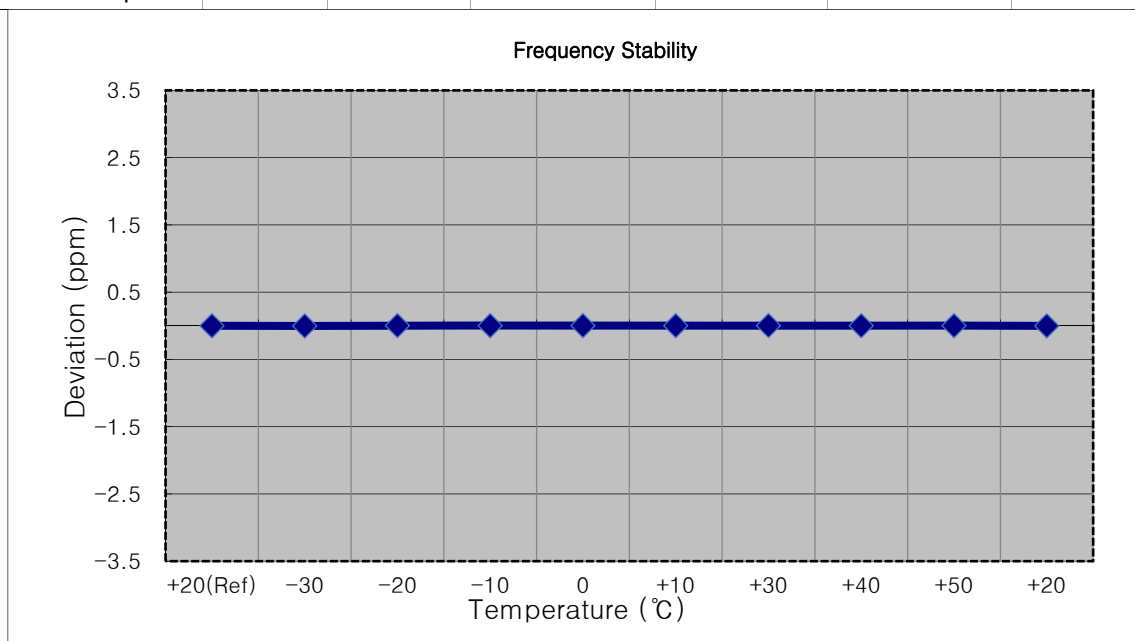


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1711,500,000 Hz
- ▣ CHANNEL: 131987 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1711 499 998	0.0	0.000 000	0.000
100 %		-30	1711 499 996	-2.1	0.000 000	-0.001
100 %		-20	1711 500 003	5.0	0.000 000	0.003
100 %		-10	1711 500 003	5.4	0.000 000	0.003
100 %		0	1711 499 993	-4.7	0.000 000	-0.003
100 %		+10	1711 500 001	3.7	0.000 000	0.002
100 %		+30	1711 500 000	2.1	0.000 000	0.001
100 %		+40	1711 500 003	5.6	0.000 000	0.003
100 %		+50	1711 500 002	4.2	0.000 000	0.002
Batt. Endpoint		3.300	+20	1711 500 004	6.0	0.000 000

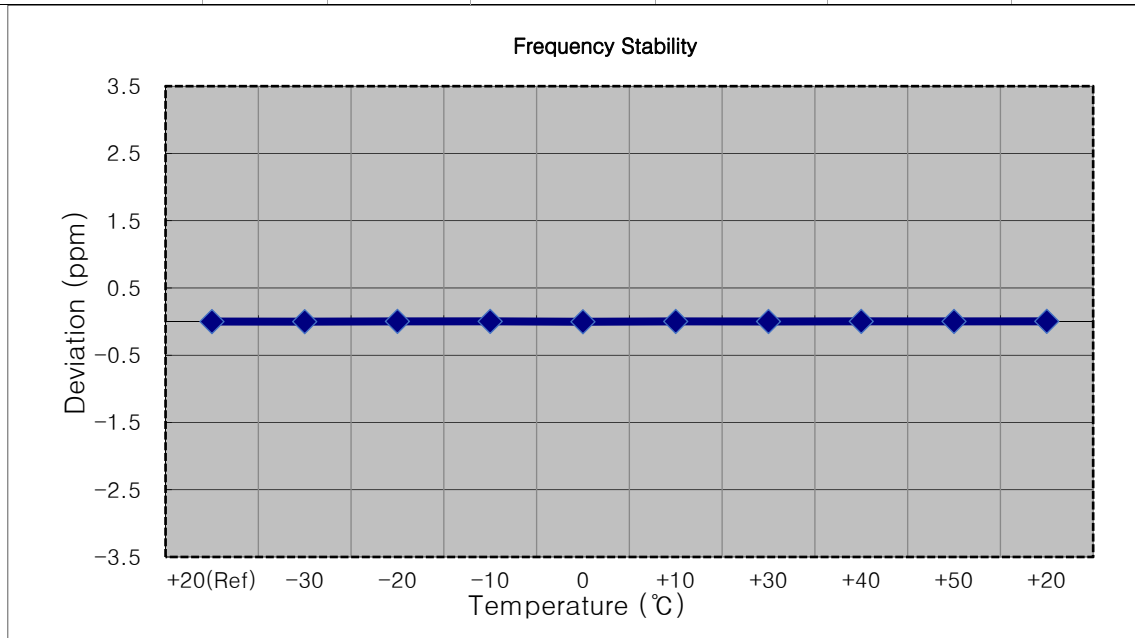


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1712,500,000 Hz
- ▣ CHANNEL: 131997 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1712 499 993	0.0	0.000 000	0.000
100 %		-30	1712 499 996	3.1	0.000 000	0.002
100 %		-20	1712 499 988	-5.2	0.000 000	-0.003
100 %		-10	1712 499 990	-3.0	0.000 000	-0.002
100 %		0	1712 499 990	-3.0	0.000 000	-0.002
100 %		+10	1712 499 996	3.1	0.000 000	0.002
100 %		+30	1712 499 996	2.6	0.000 000	0.002
100 %		+40	1712 499 990	-3.1	0.000 000	-0.002
100 %		+50	1712 499 988	-5.8	0.000 000	-0.003
Batt. Endpoint	3.300	+20	1712 499 989	-4.7	0.000 000	-0.003

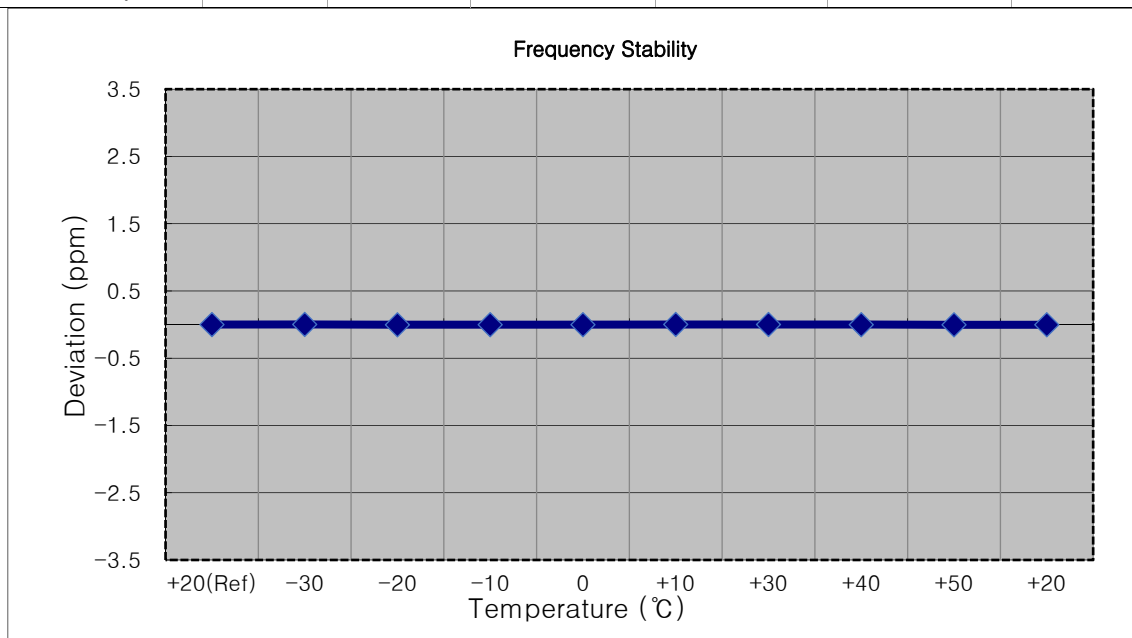


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1715,000,000 Hz
- ▣ CHANNEL: 132022 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1715 000 003	0.0	0.000 000	0.000
100 %		-30	1715 000 005	2.3	0.000 000	0.001
100 %		-20	1715 000 007	3.7	0.000 000	0.002
100 %		-10	1715 000 007	3.7	0.000 000	0.002
100 %		0	1715 000 006	2.7	0.000 000	0.002
100 %		+10	1715 000 007	3.6	0.000 000	0.002
100 %		+30	1715 000 006	2.8	0.000 000	0.002
100 %		+40	1714 999 999	-3.9	0.000 000	-0.002
100 %		+50	1714 999 999	-3.8	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1715 000 006	3.3	0.000 000

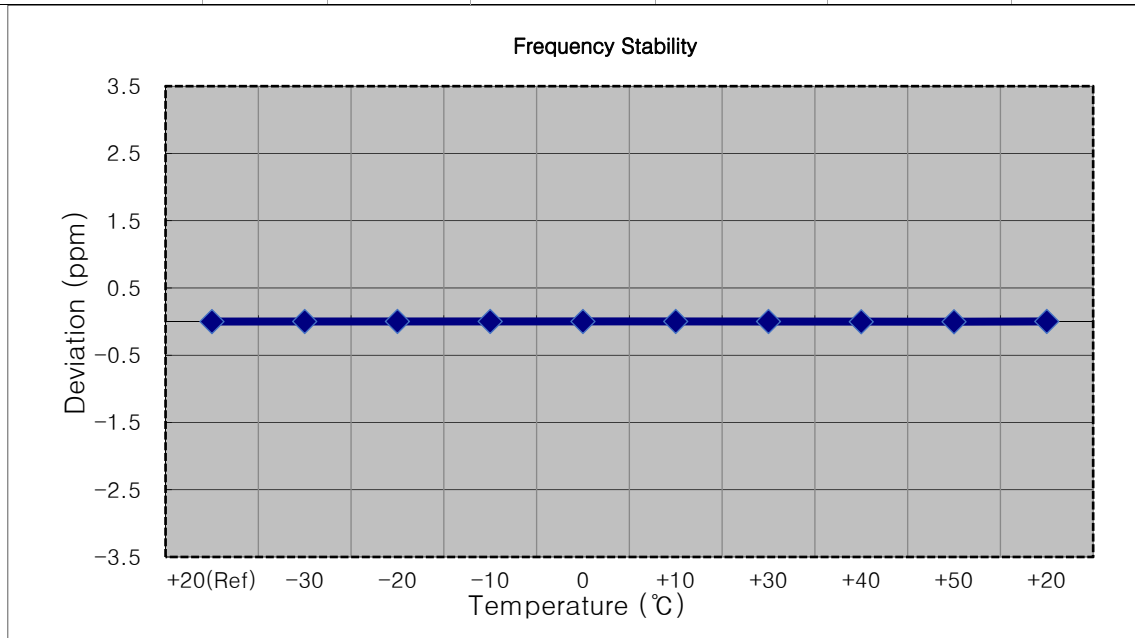


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1717,500,000 Hz
- ▣ CHANNEL: 132047 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1717 500 002	0.0	0.000 000	0.000
100 %		-30	1717 500 006	3.5	0.000 000	0.002
100 %		-20	1717 500 005	2.8	0.000 000	0.002
100 %		-10	1717 500 000	-2.3	0.000 000	-0.001
100 %		0	1717 500 006	3.5	0.000 000	0.002
100 %		+10	1717 500 006	3.6	0.000 000	0.002
100 %		+30	1717 500 005	2.4	0.000 000	0.001
100 %		+40	1717 500 004	1.7	0.000 000	0.001
100 %		+50	1717 500 007	4.9	0.000 000	0.003
Batt. Endpoint		3.300	+20	1717 500 006	4.1	0.000 000

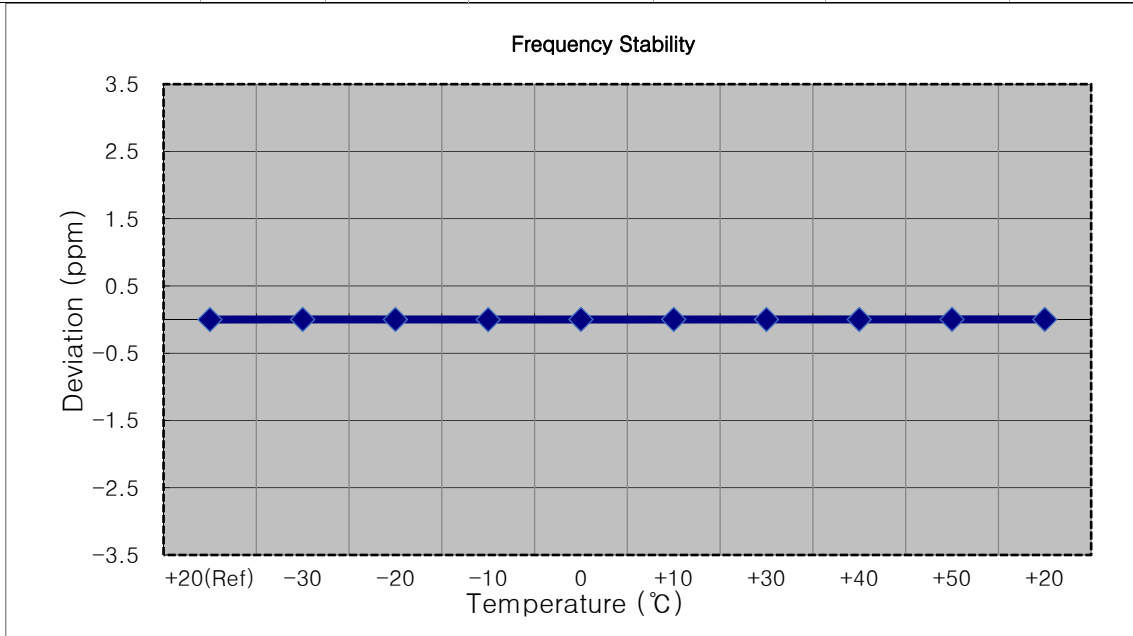


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1720,000,000 Hz
- ▣ CHANNEL: 132072 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1719 999 997	0.0	0.000 000	0.000
100 %		-30	1719 999 992	-5.1	0.000 000	-0.003
100 %		-20	1719 999 992	-4.3	0.000 000	-0.003
100 %		-10	1719 999 993	-3.4	0.000 000	-0.002
100 %		0	1719 999 991	-5.2	0.000 000	-0.003
100 %		+10	1719 999 994	-2.9	0.000 000	-0.002
100 %		+30	1719 999 993	-3.6	0.000 000	-0.002
100 %		+40	1719 999 993	-4.1	0.000 000	-0.002
100 %		+50	1719 999 995	-2.1	0.000 000	-0.001
Batt. Endpoint		3.300	+20	1719 999 999	1.9	0.000 000

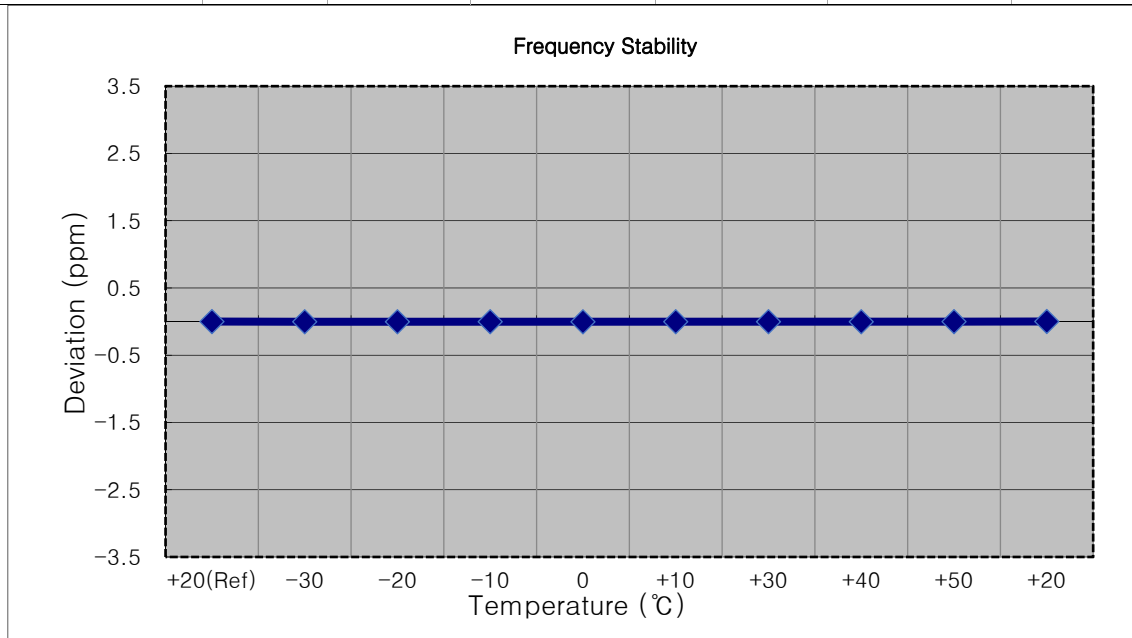


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 003	0.0	0.000 000	0.000
100 %		-30	1745 000 001	-2.2	0.000 000	-0.001
100 %		-20	1745 000 007	3.9	0.000 000	0.002
100 %		-10	1745 000 008	4.3	0.000 000	0.002
100 %		0	1745 000 008	4.6	0.000 000	0.003
100 %		+10	1745 000 006	2.3	0.000 000	0.001
100 %		+30	1745 000 002	-1.8	0.000 000	-0.001
100 %		+40	1745 000 006	2.5	0.000 000	0.001
100 %		+50	1745 000 007	3.3	0.000 000	0.002
Batt. Endpoint		3.300	+20	1745 000 007	3.8	0.000 000

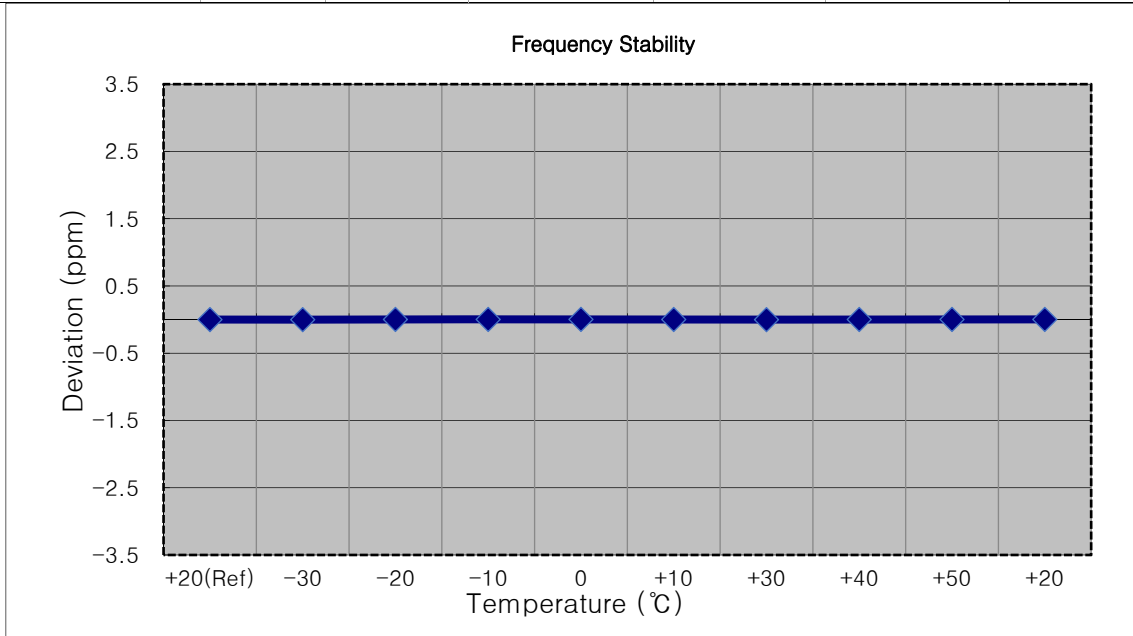


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 004	0.0	0.000 000	0.000
100 %		-30	1745 000 007	3.4	0.000 000	0.002
100 %		-20	1745 000 008	4.2	0.000 000	0.002
100 %		-10	1745 000 001	-2.6	0.000 000	-0.001
100 %		0	1745 000 001	-3.1	0.000 000	-0.002
100 %		+10	1745 000 000	-4.1	0.000 000	-0.002
100 %		+30	1745 000 006	2.8	0.000 000	0.002
100 %		+40	1745 000 001	-3.1	0.000 000	-0.002
100 %		+50	1745 000 006	2.2	0.000 000	0.001
Batt. Endpoint	3.300	+20	1745 000 002	-1.3	0.000 000	-0.001

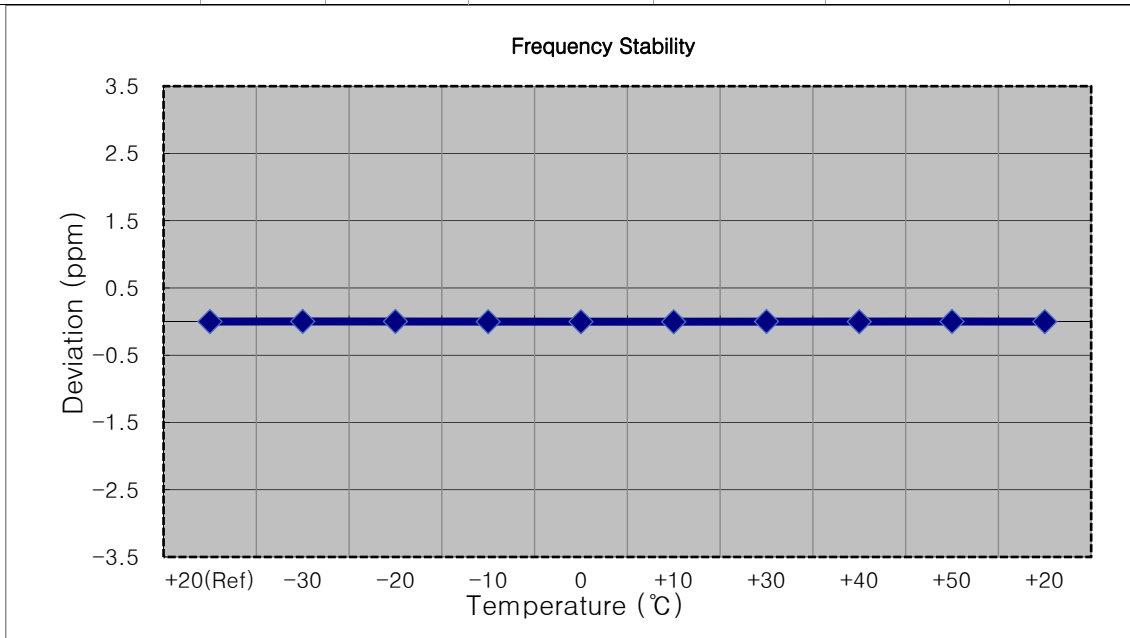


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 996	0.0	0.000 000	0.000
100 %		-30	1744 999 993	-2.5	0.000 000	-0.001
100 %		-20	1744 999 992	-3.8	0.000 000	-0.002
100 %		-10	1744 999 992	-3.9	0.000 000	-0.002
100 %		0	1744 999 999	3.4	0.000 000	0.002
100 %		+10	1744 999 992	-3.7	0.000 000	-0.002
100 %		+30	1744 999 991	-4.3	0.000 000	-0.002
100 %		+40	1744 999 992	-3.7	0.000 000	-0.002
100 %		+50	1744 999 991	-4.4	0.000 000	-0.003
Batt. Endpoint		3.300	+20	1744 999 993	-3.0	0.000 000

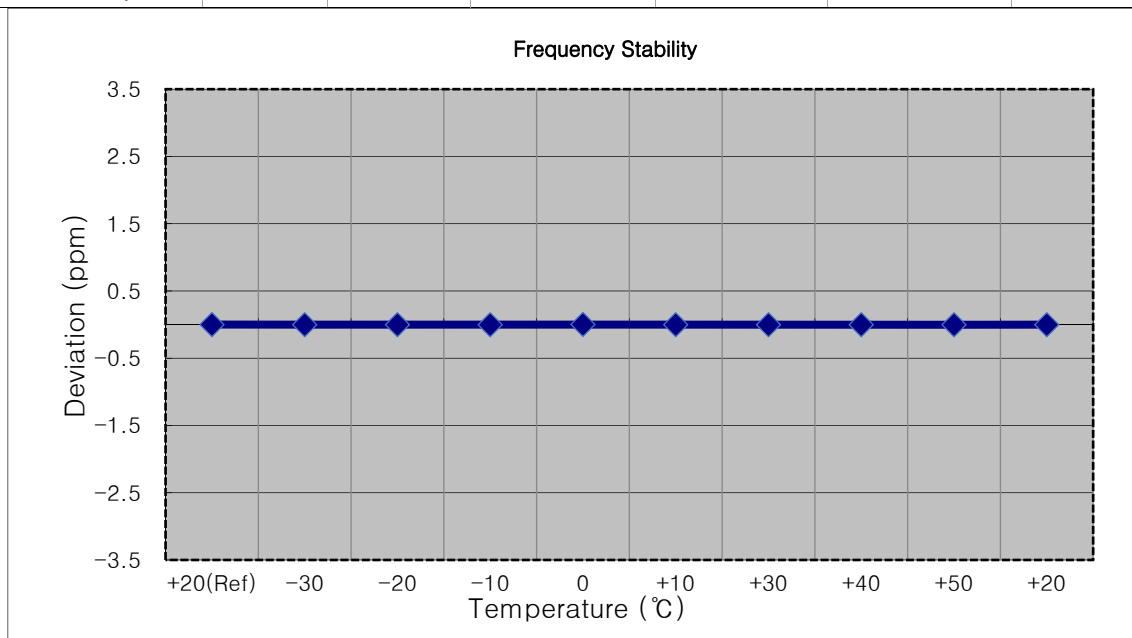


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 997	0.0	0.000 000	0.000
100 %		-30	1744 999 992	-4.4	0.000 000	-0.003
100 %		-20	1744 999 994	-3.0	0.000 000	-0.002
100 %		-10	1744 999 994	-3.0	0.000 000	-0.002
100 %		0	1744 999 999	2.9	0.000 000	0.002
100 %		+10	1744 999 991	-5.1	0.000 000	-0.003
100 %		+30	1744 999 993	-3.6	0.000 000	-0.002
100 %		+40	1744 999 993	-3.6	0.000 000	-0.002
100 %		+50	1744 999 994	-2.9	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1744 999 995	-1.6	0.000 000

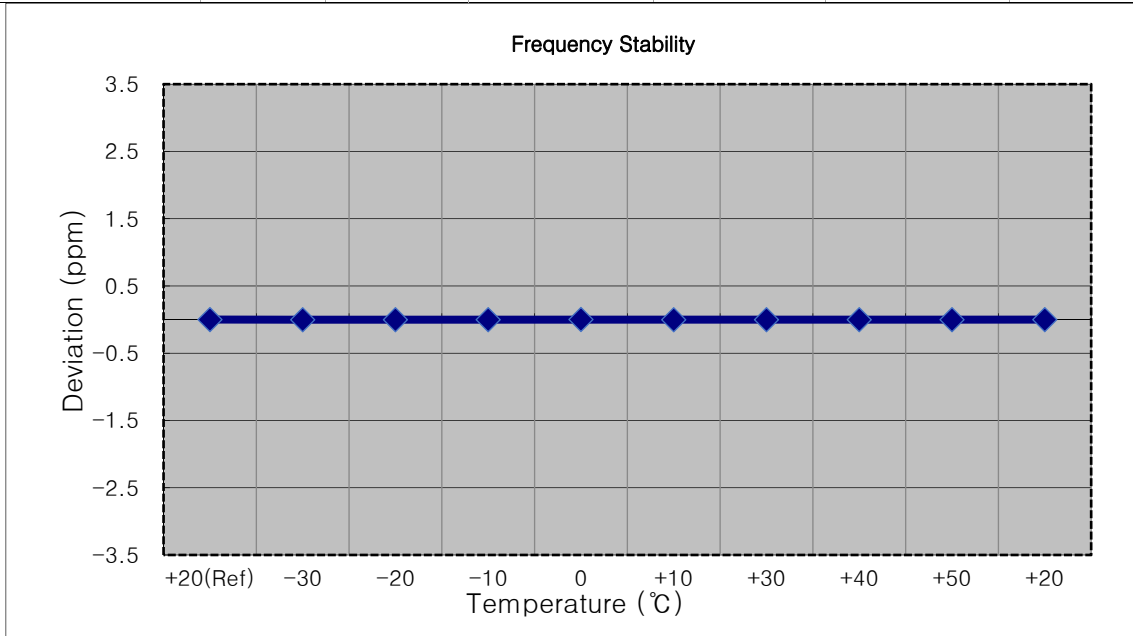


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1744 999 999	0.0	0.000 000	0.000
100 %		-30	1745 000 001	2.1	0.000 000	0.001
100 %		-20	1744 999 995	-3.3	0.000 000	-0.002
100 %		-10	1745 000 000	1.7	0.000 000	0.001
100 %		0	1745 000 002	3.8	0.000 000	0.002
100 %		+10	1745 000 001	2.7	0.000 000	0.002
100 %		+30	1744 999 993	-5.6	0.000 000	-0.003
100 %		+40	1745 000 001	2.6	0.000 000	0.001
100 %		+50	1744 999 996	-3.0	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1745 000 003	4.6	0.000 000	0.003

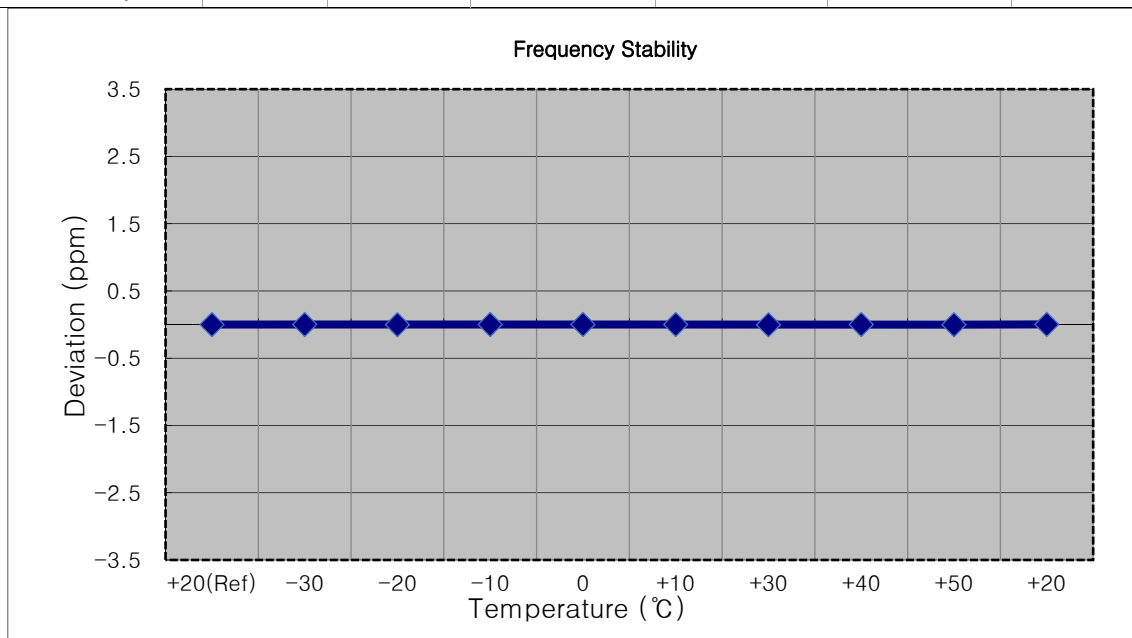


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1745,000,000 Hz
- ▣ CHANNEL: 132322 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1745 000 002	0.0	0.000 000	0.000
100 %		-30	1744 999 999	-2.4	0.000 000	-0.001
100 %		-20	1745 000 000	-1.7	0.000 000	-0.001
100 %		-10	1745 000 004	2.3	0.000 000	0.001
100 %		0	1744 999 999	-2.8	0.000 000	-0.002
100 %		+10	1745 000 000	-1.9	0.000 000	-0.001
100 %		+30	1745 000 000	-2.0	0.000 000	-0.001
100 %		+40	1744 999 998	-3.3	0.000 000	-0.002
100 %		+50	1744 999 998	-3.5	0.000 000	-0.002
Batt. Endpoint		3.300	+20	1745 000 004	2.8	0.000 000

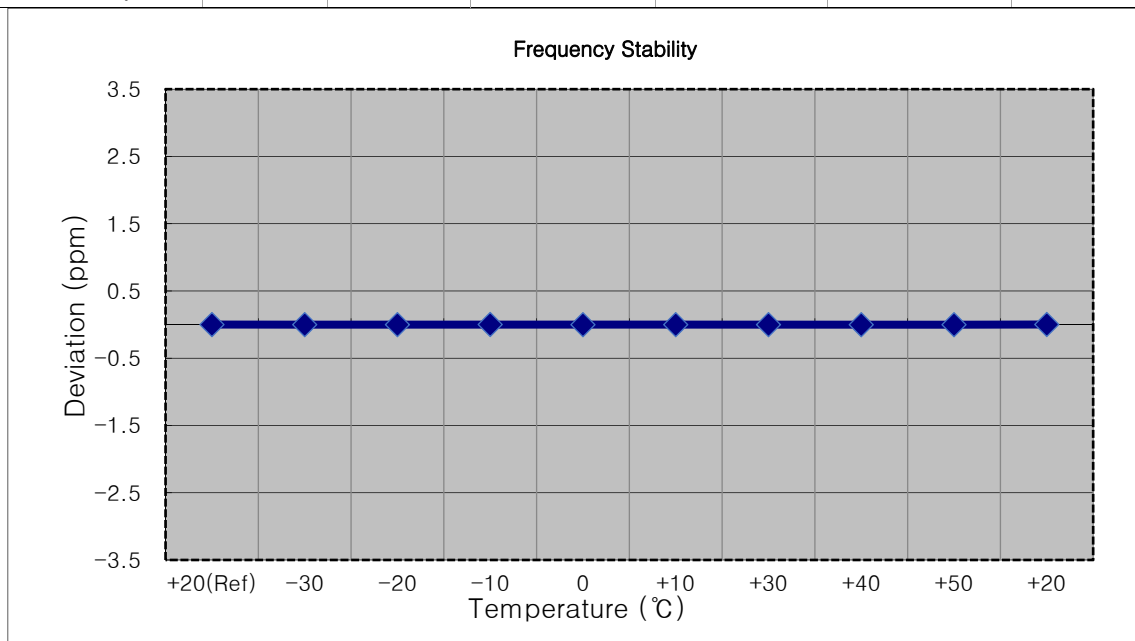


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1779,300,000 Hz
- ▣ CHANNEL: 132665 (1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1779 299 997	0.0	0.000 000	0.000
100 %		-30	1779 300 000	2.9	0.000 000	0.002
100 %		-20	1779 300 000	3.5	0.000 000	0.002
100 %		-10	1779 300 002	4.8	0.000 000	0.003
100 %		0	1779 300 000	3.0	0.000 000	0.002
100 %		+10	1779 300 001	4.4	0.000 000	0.002
100 %		+30	1779 300 001	4.3	0.000 000	0.002
100 %		+40	1779 299 993	-3.7	0.000 000	-0.002
100 %		+50	1779 300 001	3.6	0.000 000	0.002
Batt. Endpoint		3.300	+20	1779 300 001	3.7	0.000 000

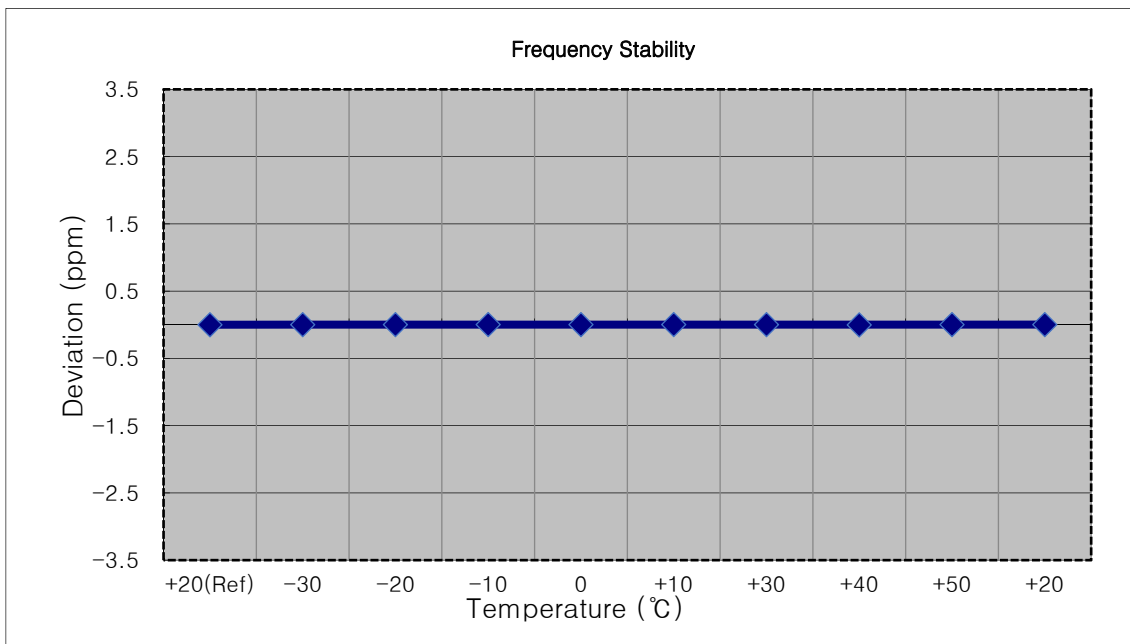


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1778,500,000 Hz
- ▣ CHANNEL: 132657 (3 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1778 499 994	0.0	0.000 000	0.000
100 %		-30	1778 499 987	-6.7	0.000 000	-0.004
100 %		-20	1778 499 988	-5.9	0.000 000	-0.003
100 %		-10	1778 500 000	6.1	0.000 000	0.003
100 %		0	1778 499 985	-9.0	-0.000 001	-0.005
100 %		+10	1778 500 001	7.2	0.000 000	0.004
100 %		+30	1778 499 985	-9.1	-0.000 001	-0.005
100 %		+40	1778 499 985	-9.0	-0.000 001	-0.005
100 %		+50	1778 499 986	-8.3	0.000 000	-0.005
Batt. Endpoint		3.300	+20	1778 500 000	6.6	0.000 000

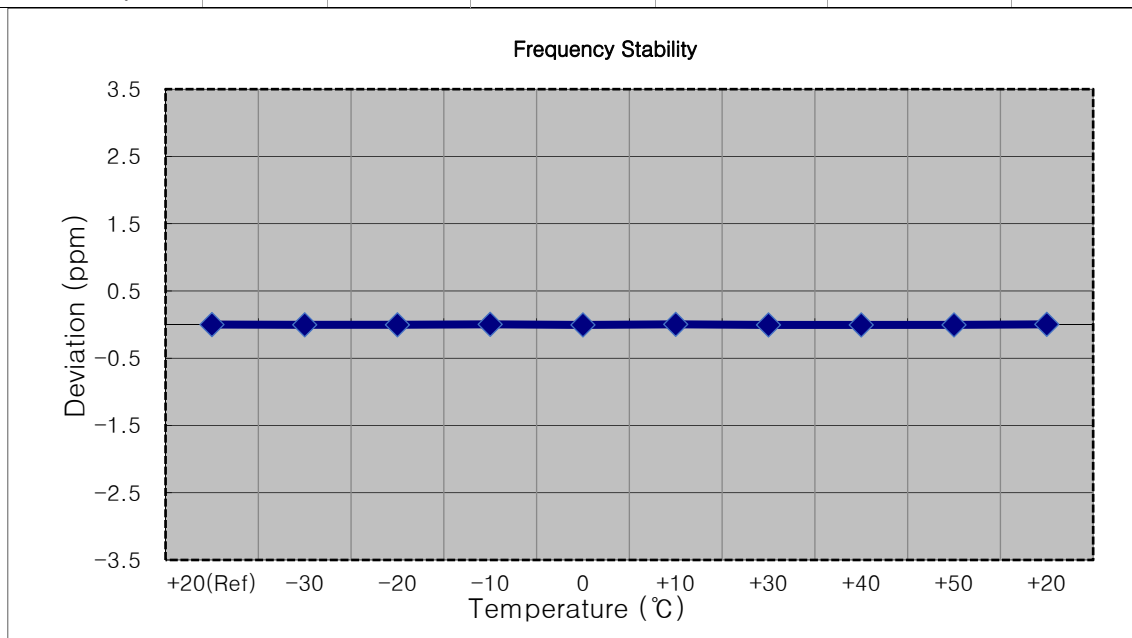


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1777,500,000 Hz
- ▣ CHANNEL: 132647 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1777 500 004	0.0	0.000 000	0.000
100 %		-30	1777 500 007	2.8	0.000 000	0.002
100 %		-20	1777 500 010	5.7	0.000 000	0.003
100 %		-10	1777 500 008	3.6	0.000 000	0.002
100 %		0	1777 500 008	4.3	0.000 000	0.002
100 %		+10	1777 500 008	4.3	0.000 000	0.002
100 %		+30	1777 500 002	-2.0	0.000 000	-0.001
100 %		+40	1777 500 006	1.7	0.000 000	0.001
100 %		+50	1777 500 006	2.2	0.000 000	0.001
Batt. Endpoint		3.300	+20	1777 500 009	4.9	0.000 000

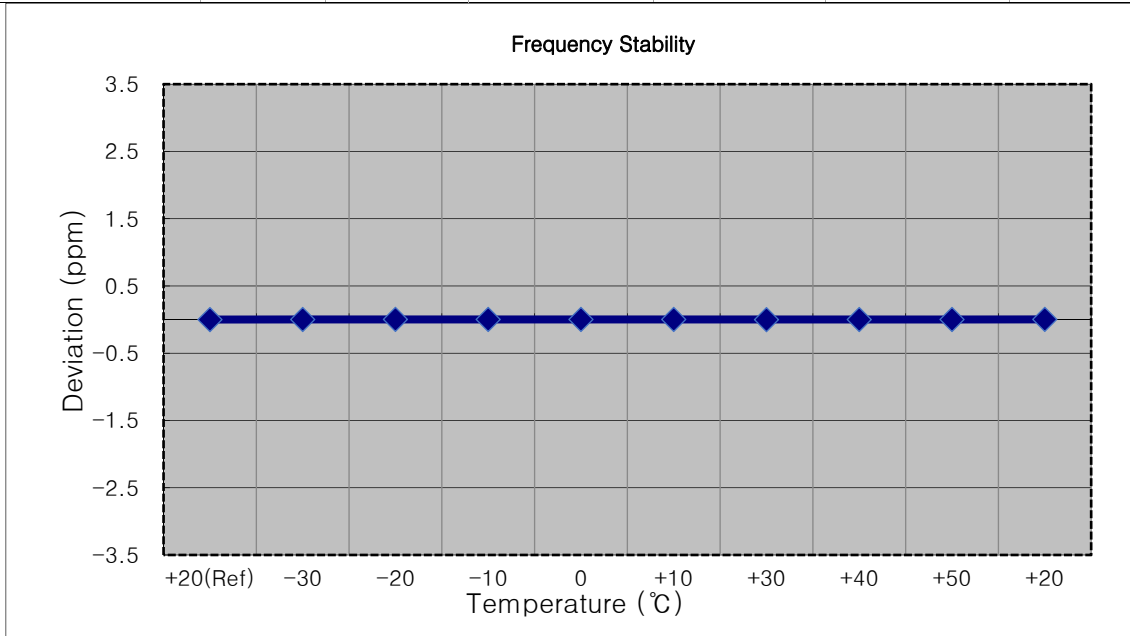


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1775,000,000 Hz
- ▣ CHANNEL: 132622 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1774 999 997	0.0	0.000 000	0.000
100 %		-30	1774 999 994	-2.8	0.000 000	-0.002
100 %		-20	1774 999 993	-3.4	0.000 000	-0.002
100 %		-10	1774 999 994	-3.1	0.000 000	-0.002
100 %		0	1774 999 998	1.5	0.000 000	0.001
100 %		+10	1774 999 993	-3.4	0.000 000	-0.002
100 %		+30	1775 000 000	2.8	0.000 000	0.002
100 %		+40	1774 999 995	-2.3	0.000 000	-0.001
100 %		+50	1774 999 992	-4.4	0.000 000	-0.002
Batt. Endpoint	3.300	+20	1774 999 994	-2.5	0.000 000	-0.001

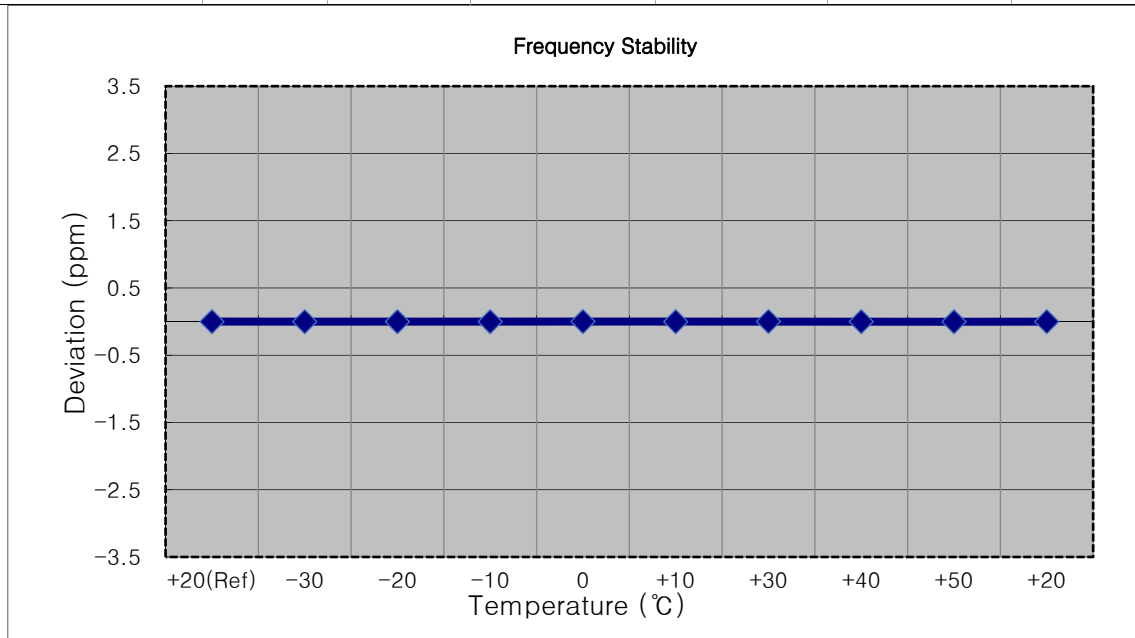


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1772,500,000 Hz
- ▣ CHANNEL: 132597 (15 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1772 499 993	0.0	0.000 000	0.000
100 %		-30	1772 499 986	-6.9	0.000 000	-0.004
100 %		-20	1772 499 986	-6.8	0.000 000	-0.004
100 %		-10	1772 499 983	-10.0	-0.000 001	-0.006
100 %		0	1772 499 984	-9.3	-0.000 001	-0.005
100 %		+10	1772 499 986	-7.1	0.000 000	-0.004
100 %		+30	1772 499 985	-8.3	0.000 000	-0.005
100 %		+40	1772 499 986	-7.7	0.000 000	-0.004
100 %		+50	1772 499 986	-7.4	0.000 000	-0.004
Batt. Endpoint	3.300	+20	1772 499 988	-5.4	0.000 000	-0.003

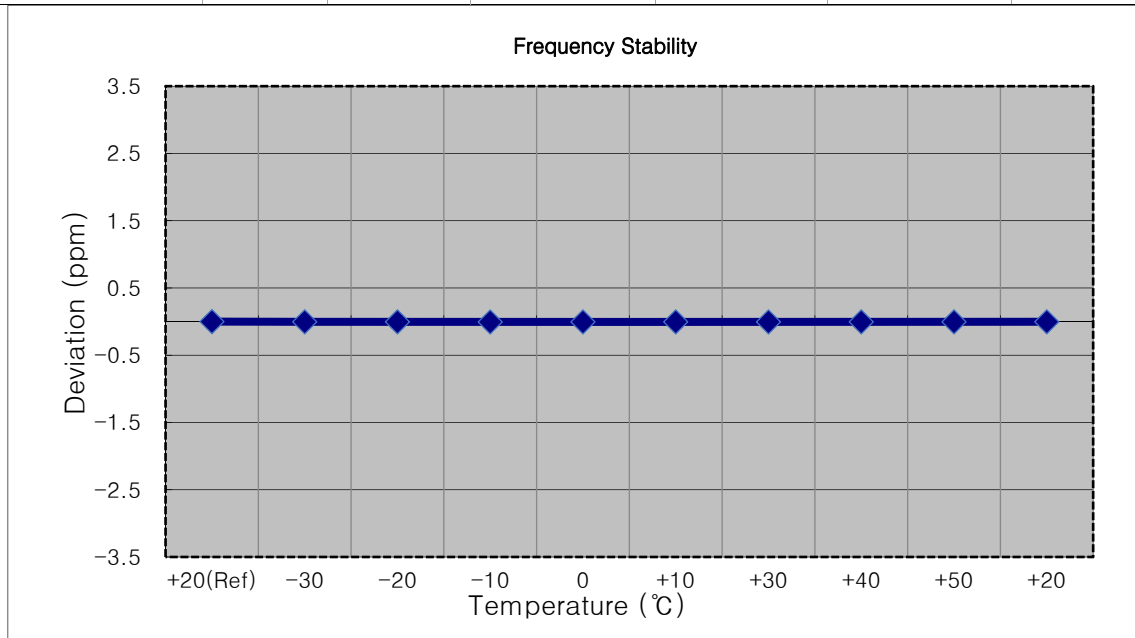


- ▣ MODE: LTE 66/4
- ▣ OPERATING FREQUENCY: 1770,000,000 Hz
- ▣ CHANNEL: 132572 (20 MHz)
- ▣ REFERENCE VOLTAGE: 3.880 VDC
- ▣ DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.880	+20(Ref)	1769 999 996	0.0	0.000 000	0.000
100 %		-30	1769 999 994	-2.5	0.000 000	-0.001
100 %		-20	1769 999 992	-3.7	0.000 000	-0.002
100 %		-10	1770 000 000	4.0	0.000 000	0.002
100 %		0	1769 999 994	-1.7	0.000 000	-0.001
100 %		+10	1769 999 990	-6.5	0.000 000	-0.004
100 %		+30	1769 999 994	-2.2	0.000 000	-0.001
100 %		+40	1769 999 993	-3.1	0.000 000	-0.002
100 %		+50	1769 999 999	2.5	0.000 000	0.001
Batt. Endpoint		3.300	+20	1769 999 991	-5.4	0.000 000

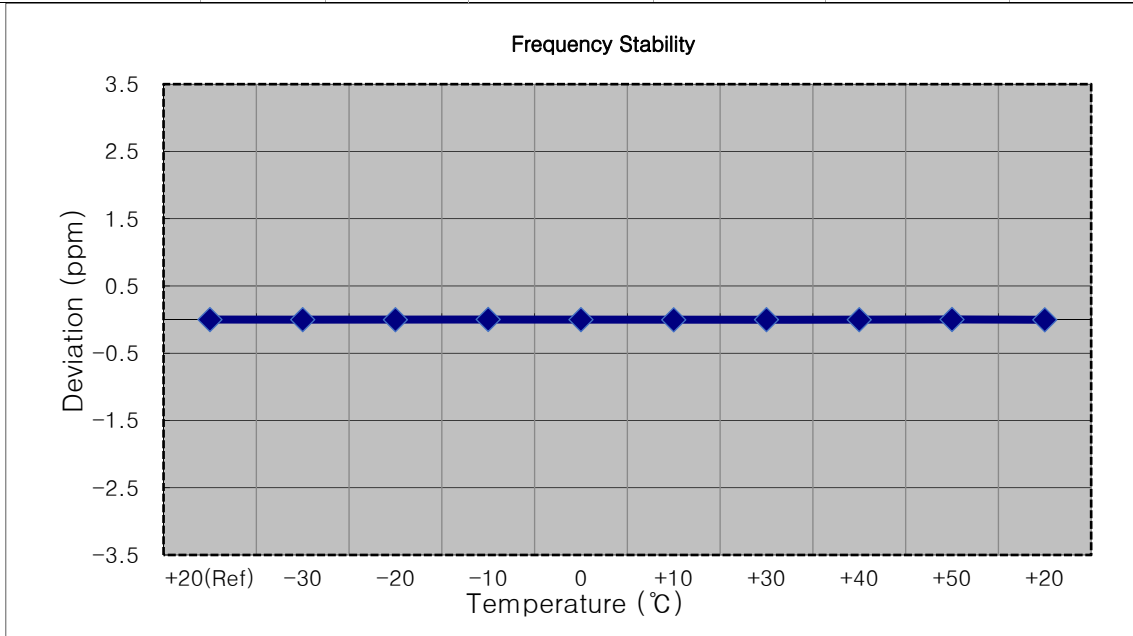


10. TEST PLOTS(Main 1 Ant)


LTE B66_1.4 M_PAR_Mid_QPSK_FullRB

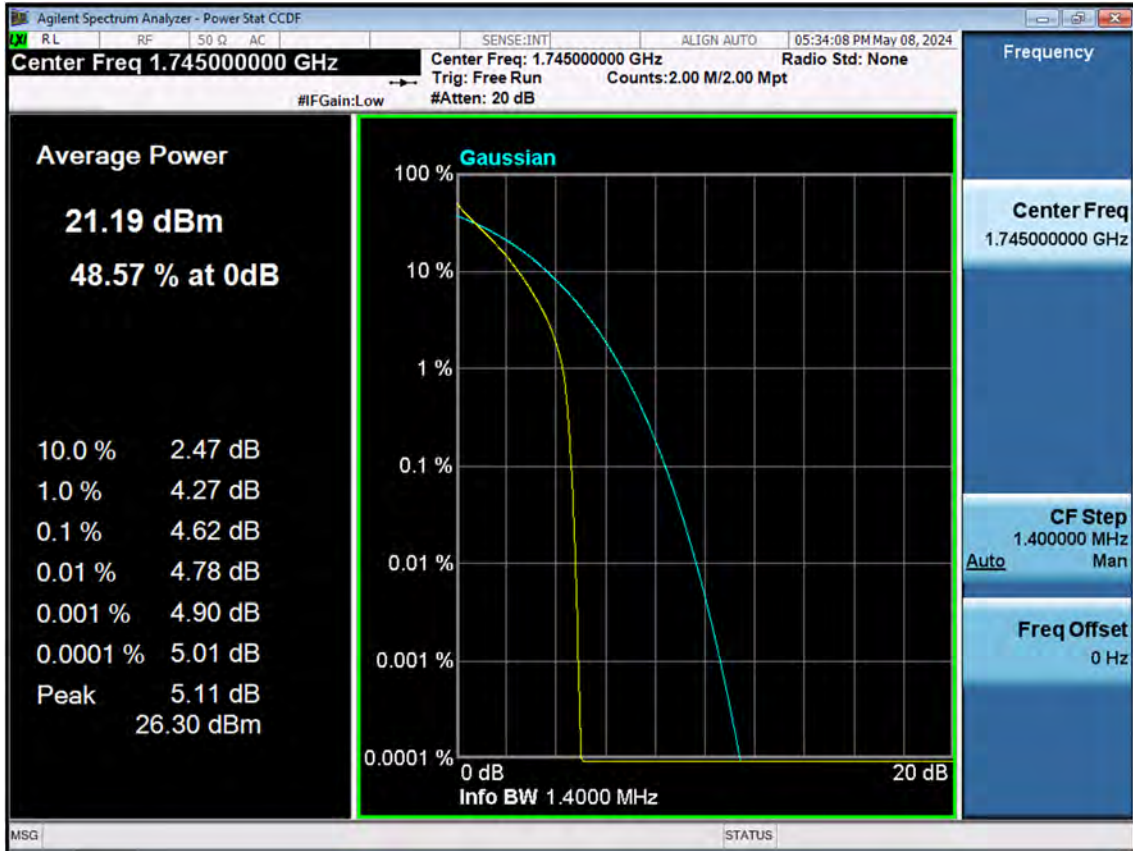


LTE B66_1.4 M_PAR_Mid_16QAM_FullRB

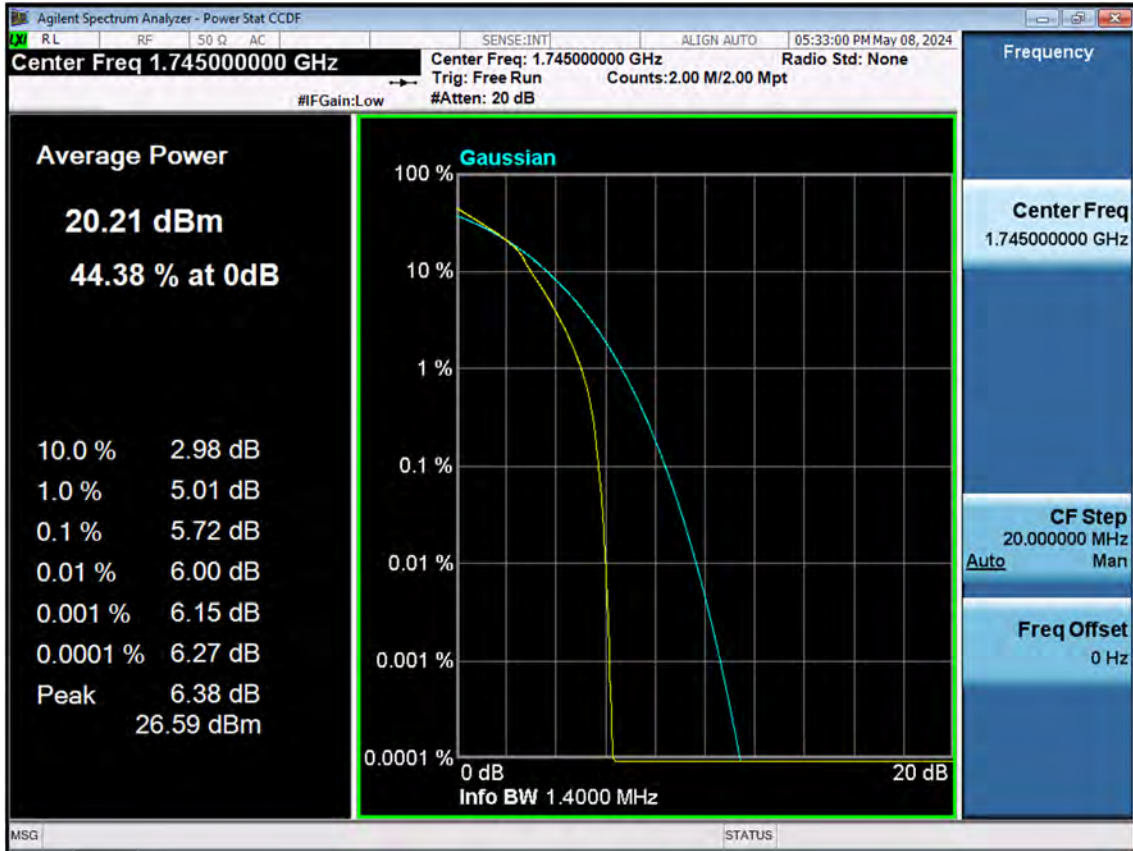


LTE B66_1.4 M_PAR_Mid_64QAM_FullRB

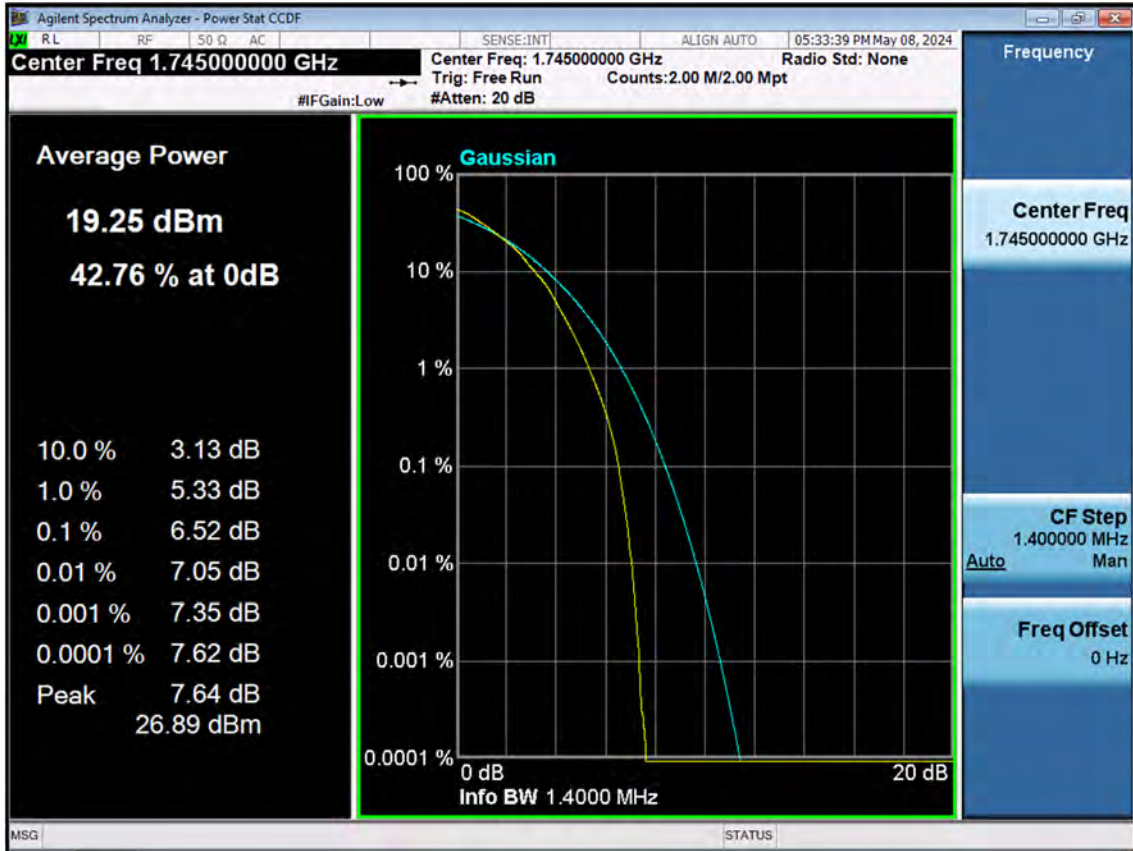


LTE B66_3 M_PAR_Mid_QPSK_FullRB

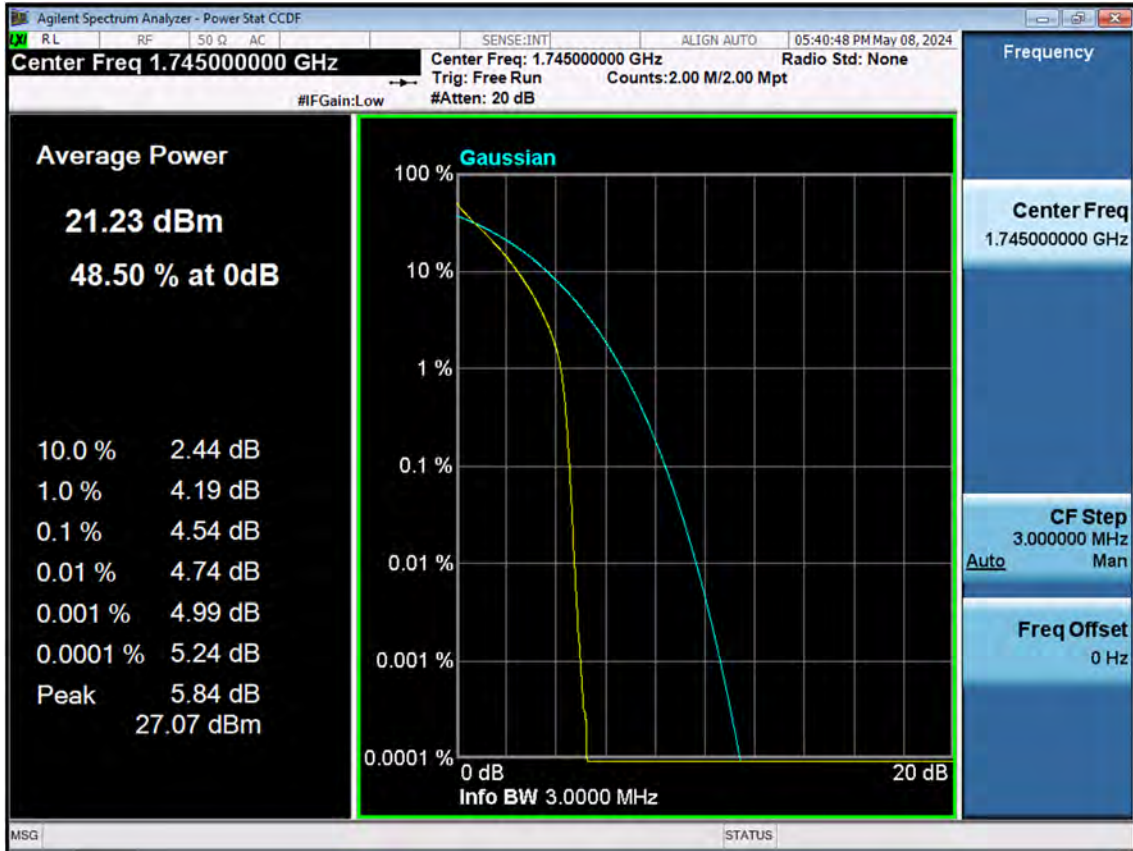


LTE B66_3 M_PAR_Mid_16QAM_FullRB

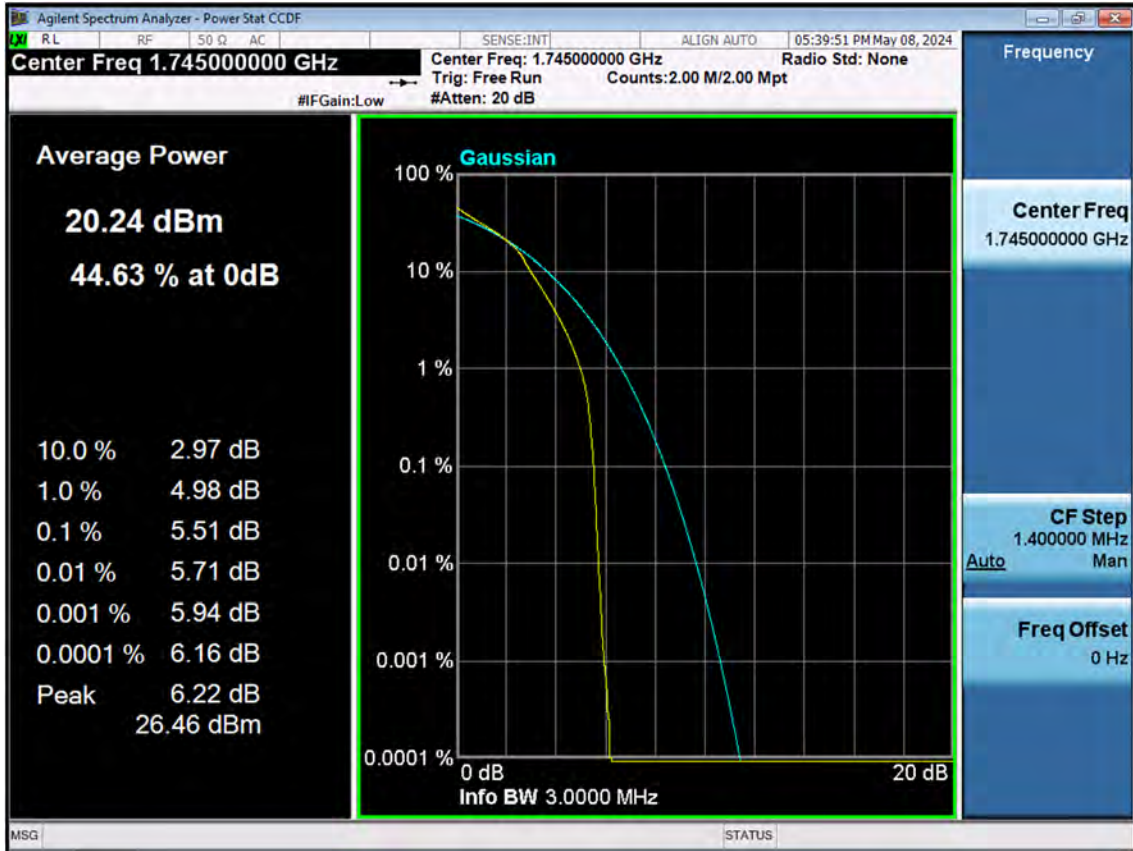


LTE B66_3 M_PAR_Mid_64QAM_FullRB

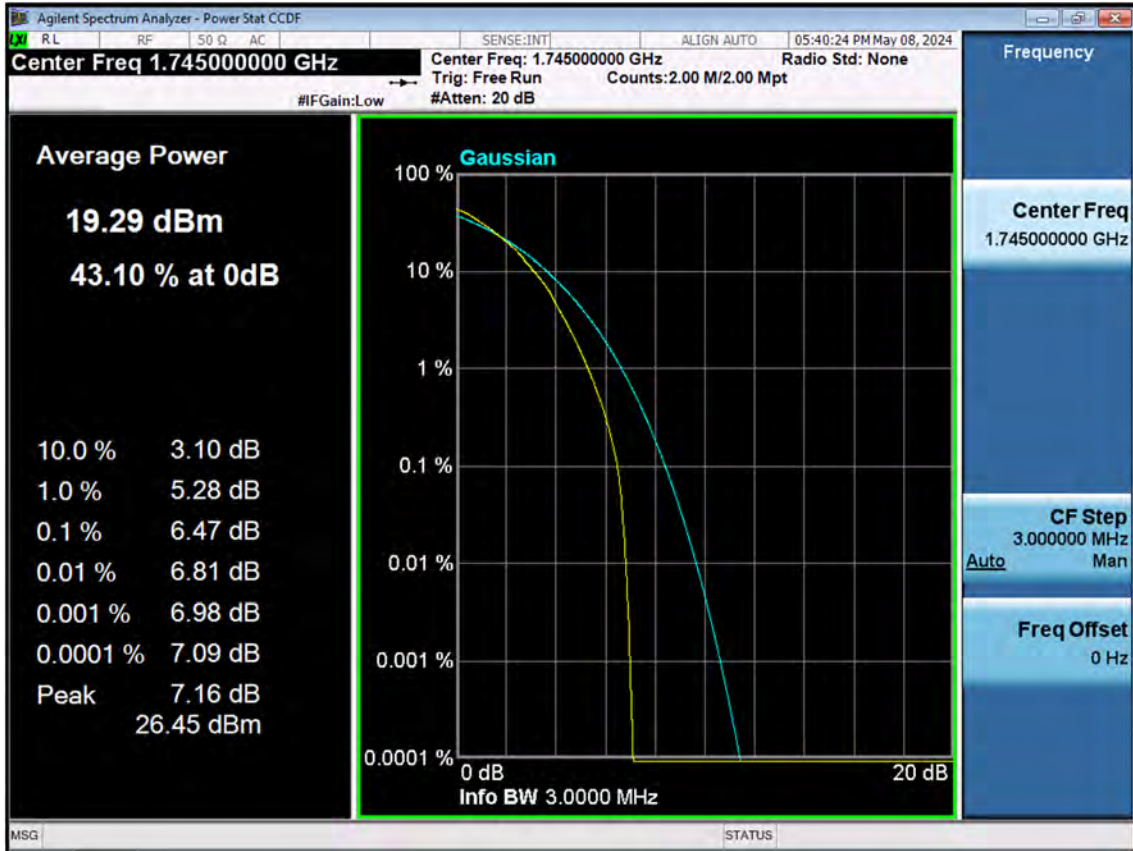


LTE B66_5 M_PAR_Mid_QPSK_FullRB

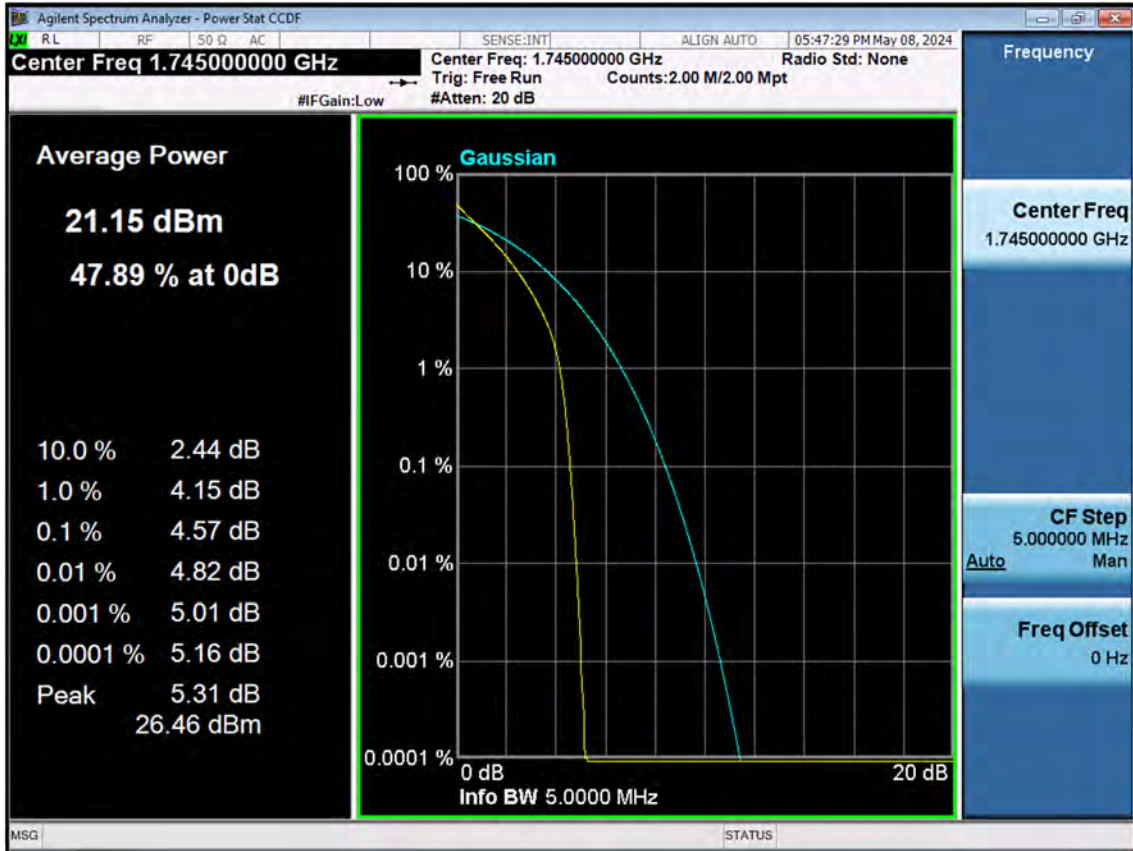


LTE B66_5 M_PAR_Mid_16QAM_FullRB

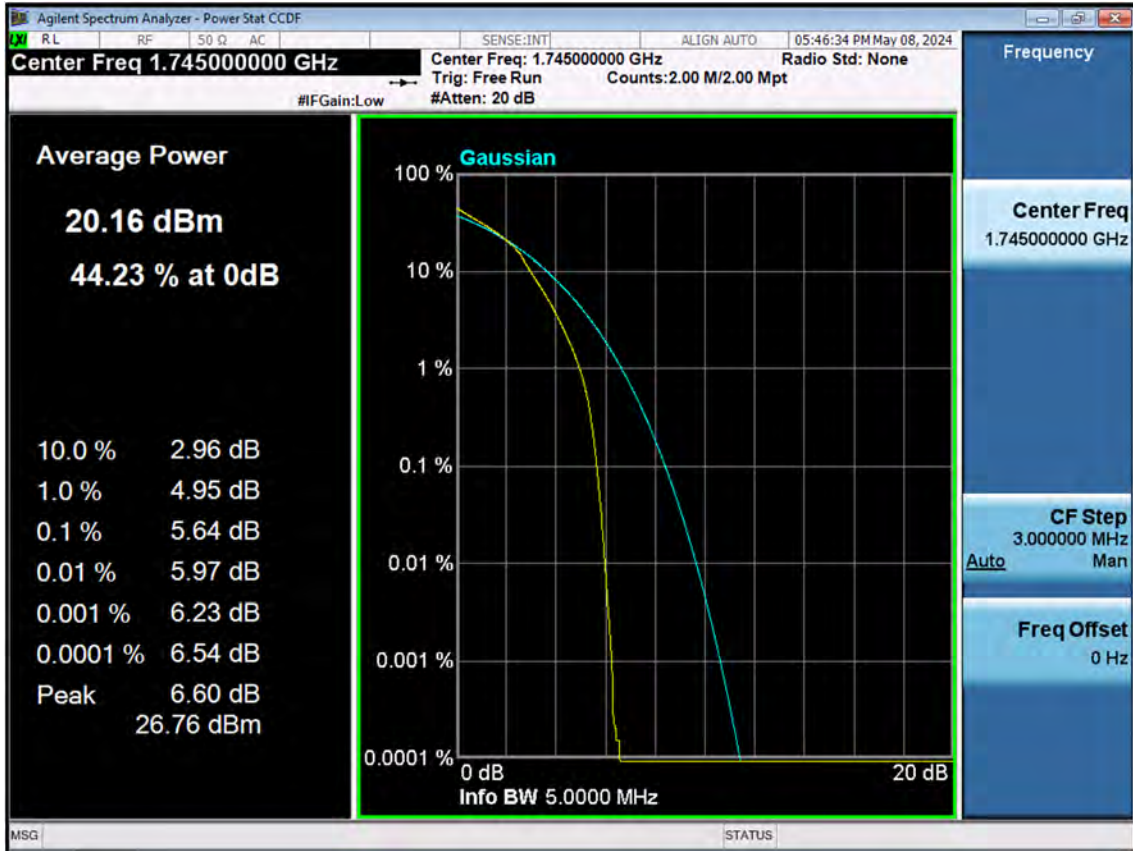


LTE B66_5 M_PAR_Mid_64QAM_FullRB

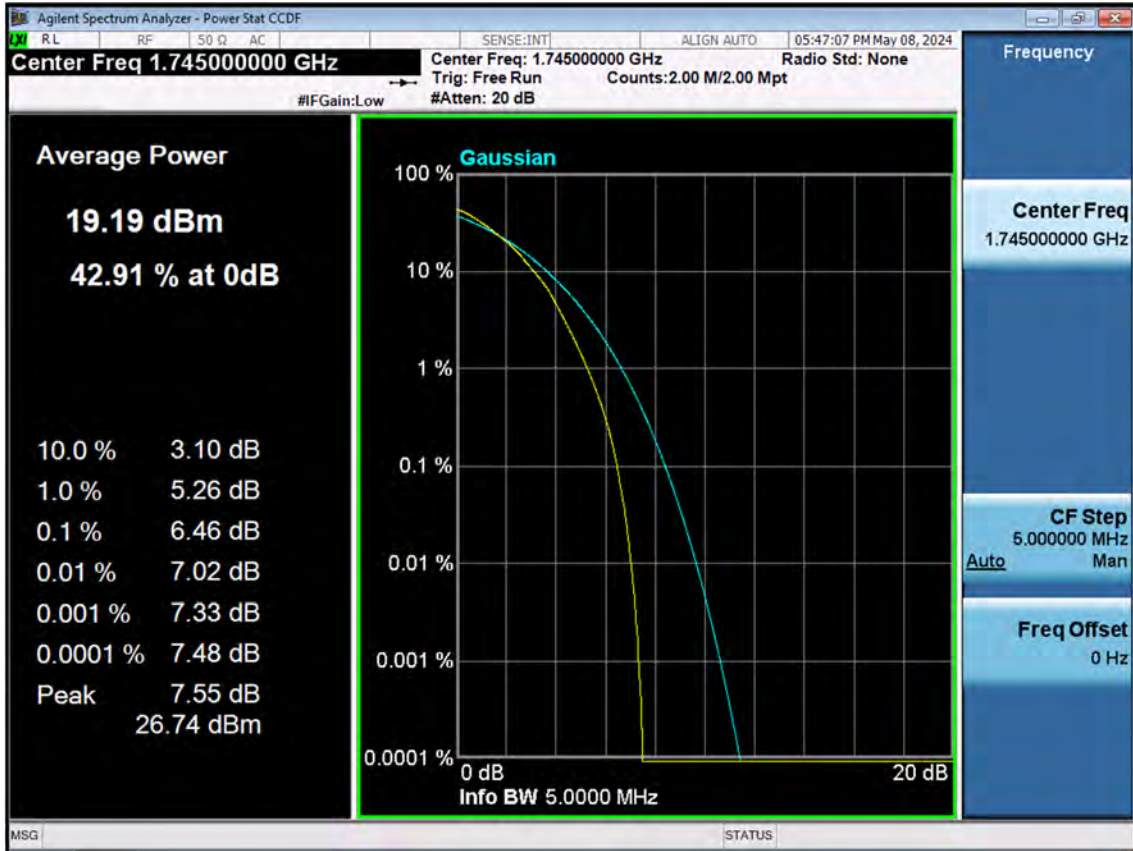


LTE B66_10 M_PAR_Mid_QPSK_FullRB

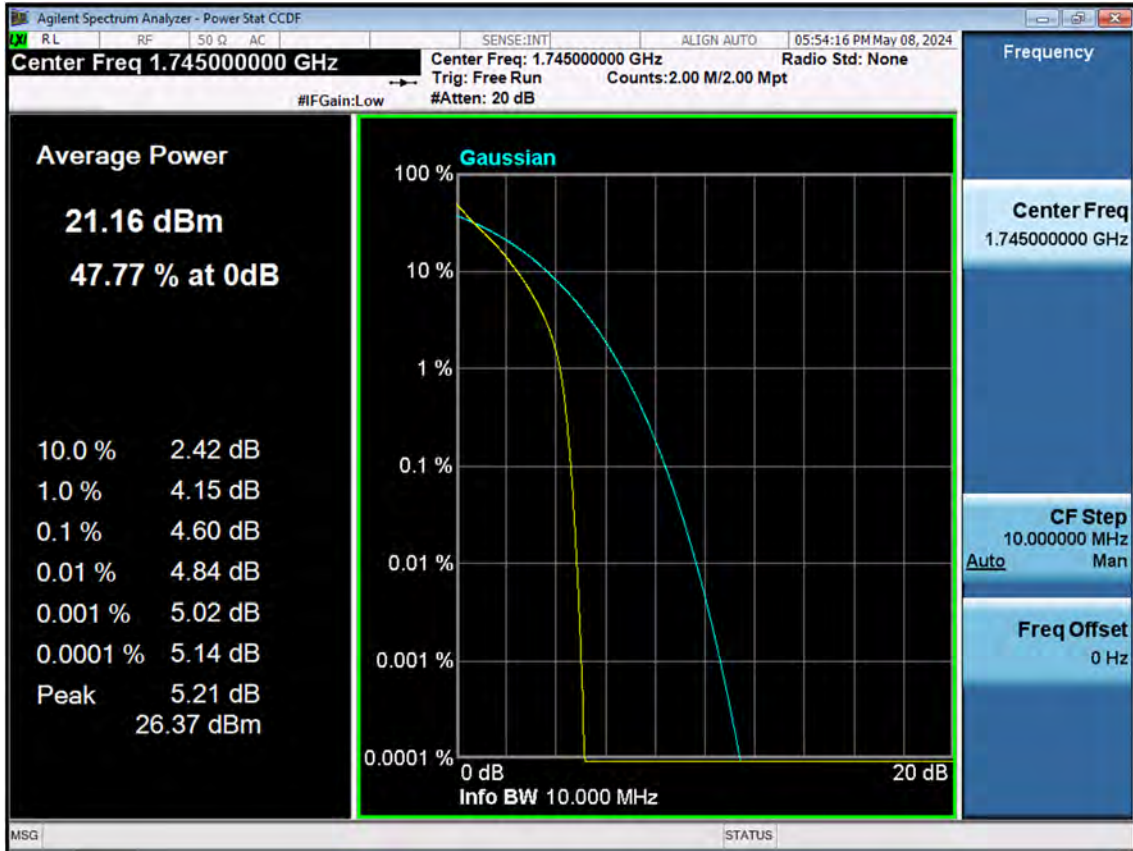


LTE B66_10 M_PAR_Mid_16QAM_FullRB

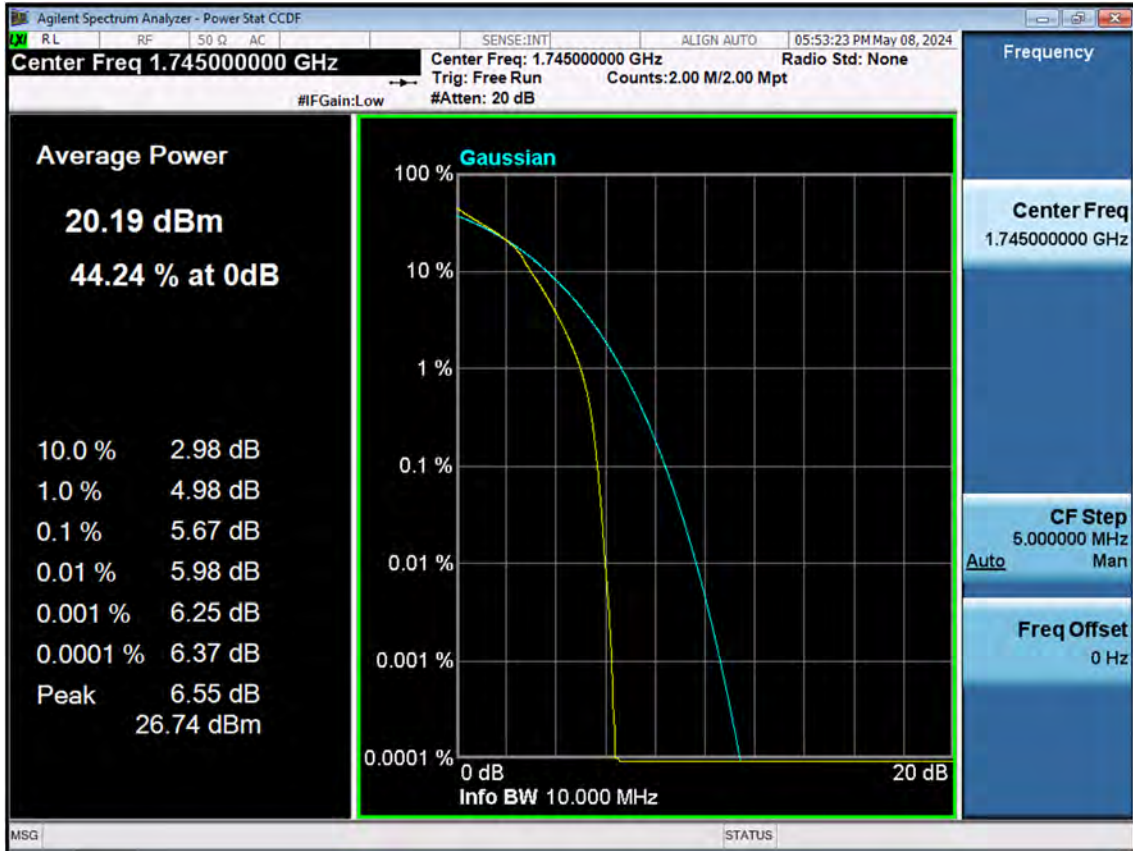


LTE B66_10 M_PAR_Mid_64QAM_FullRB

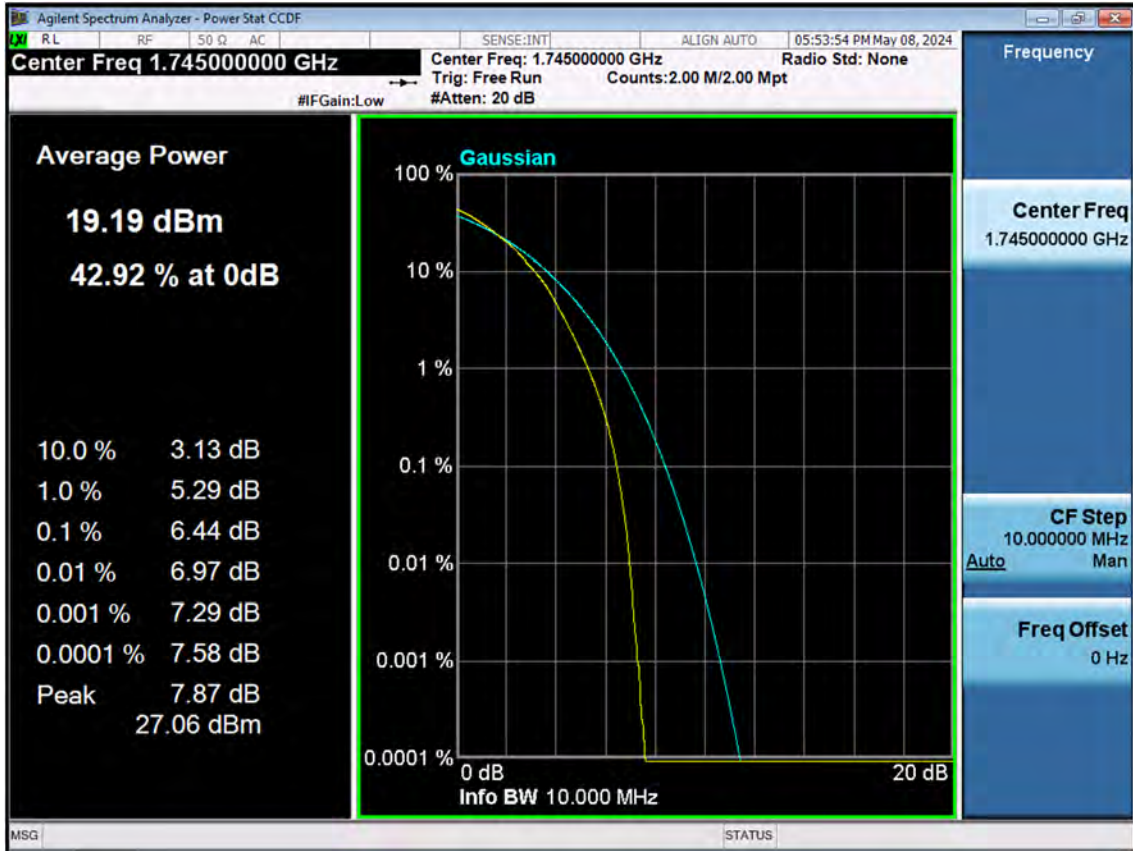


LTE B66_15 M_PAR_Mid_QPSK_FullRB

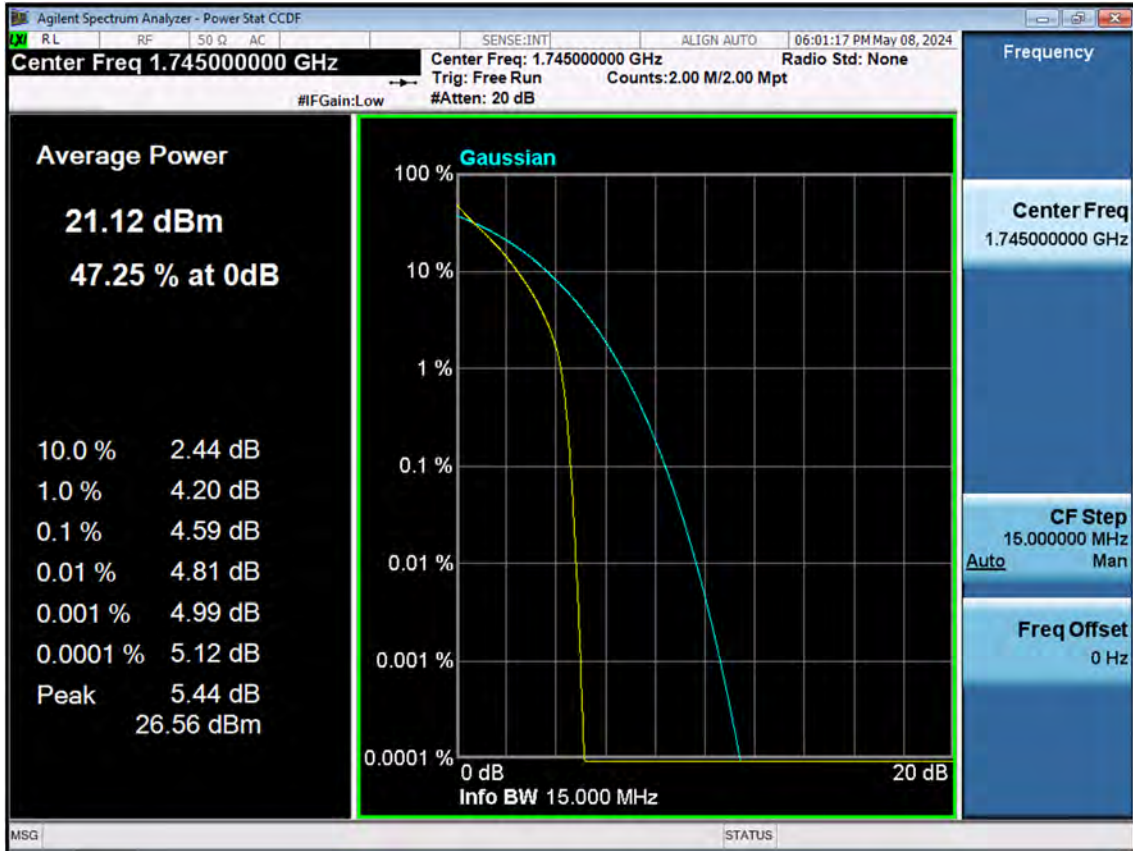


LTE B66_15 M_PAR_Mid_16QAM_FullRB

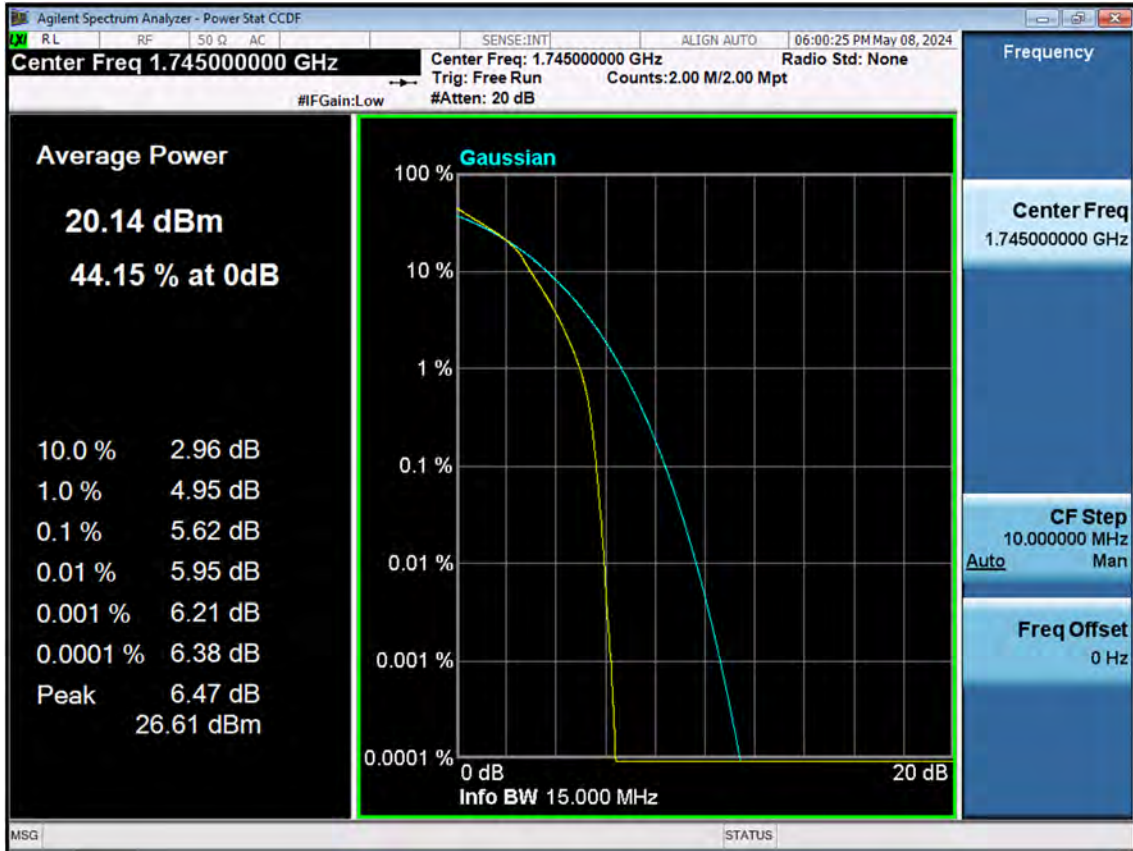


LTE B66_15 M_PAR_Mid_64QAM_FullRB

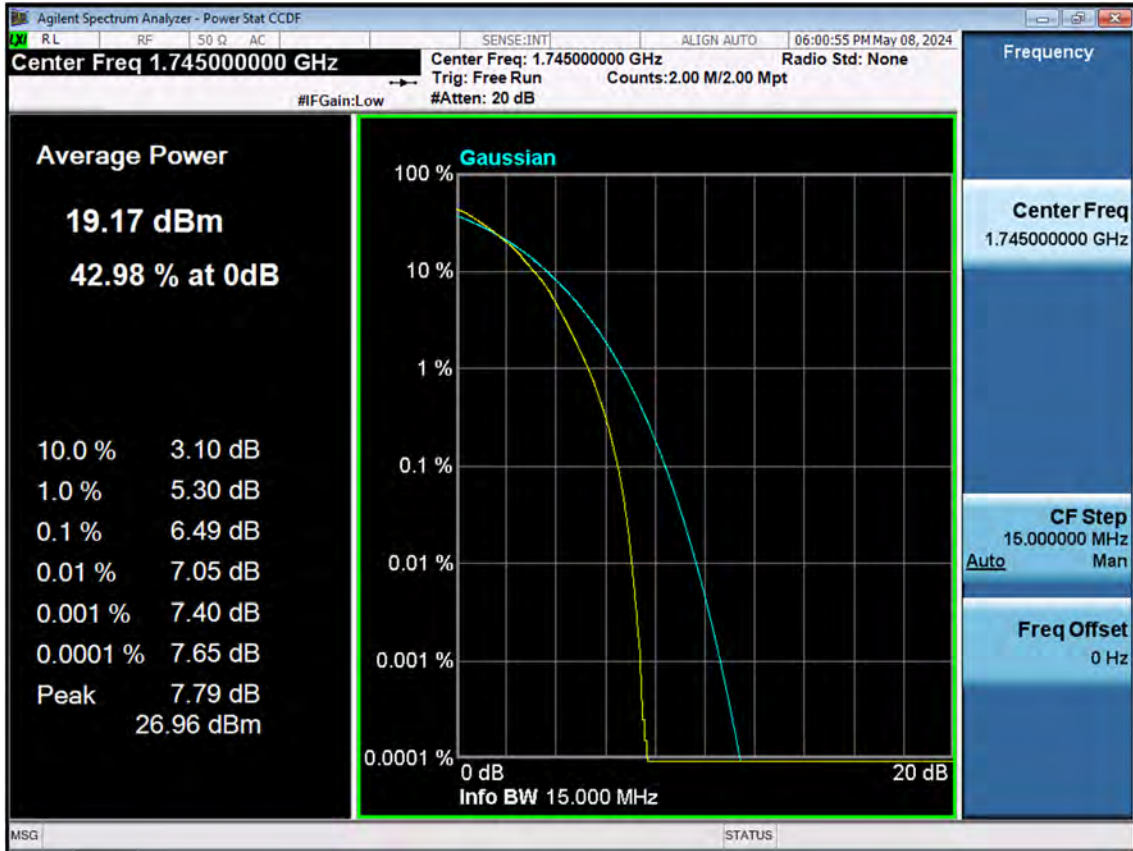


LTE B66_20 M_PAR_Mid_QPSK_FullRB

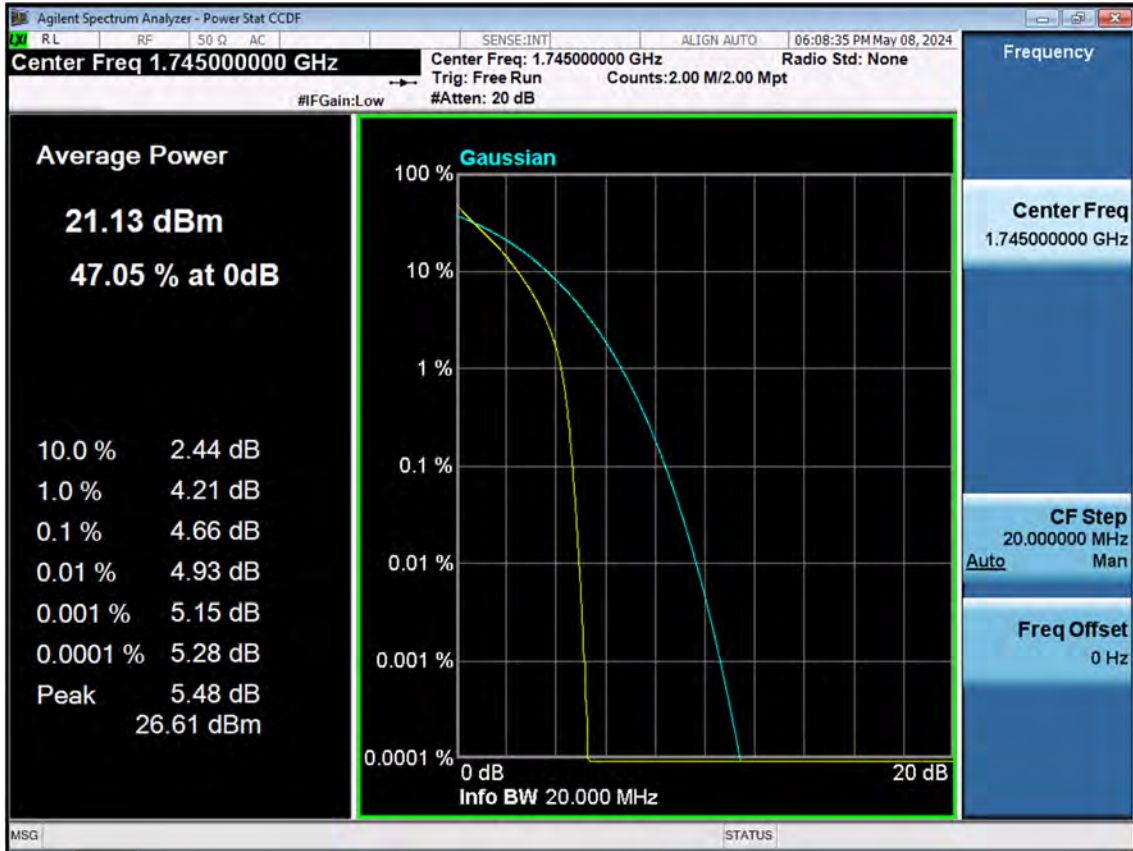


LTE B66_20 M_PAR_Mid_16QAM_FullRB

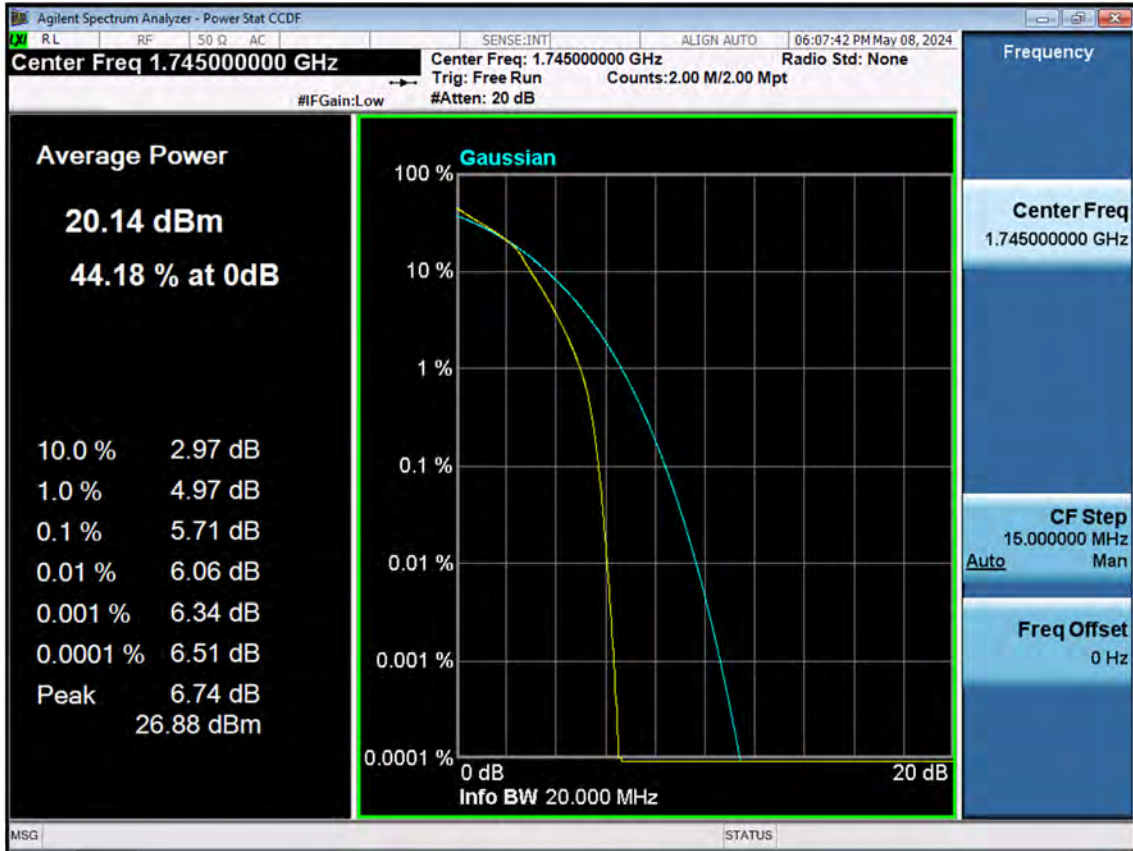


LTE B66_20 M_PAR_Mid_64QAM_FullRB

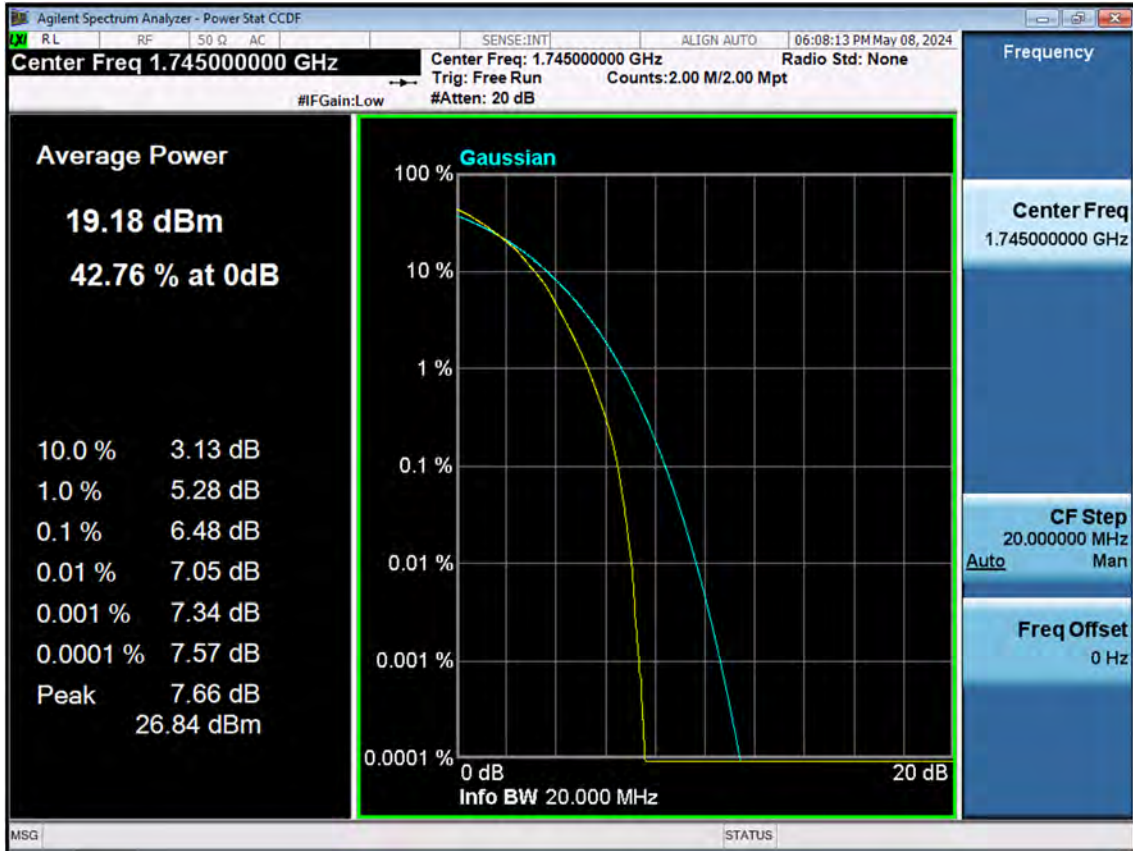


LTE B66_1.4 M_OBW_Mid_QPSK_FullRB

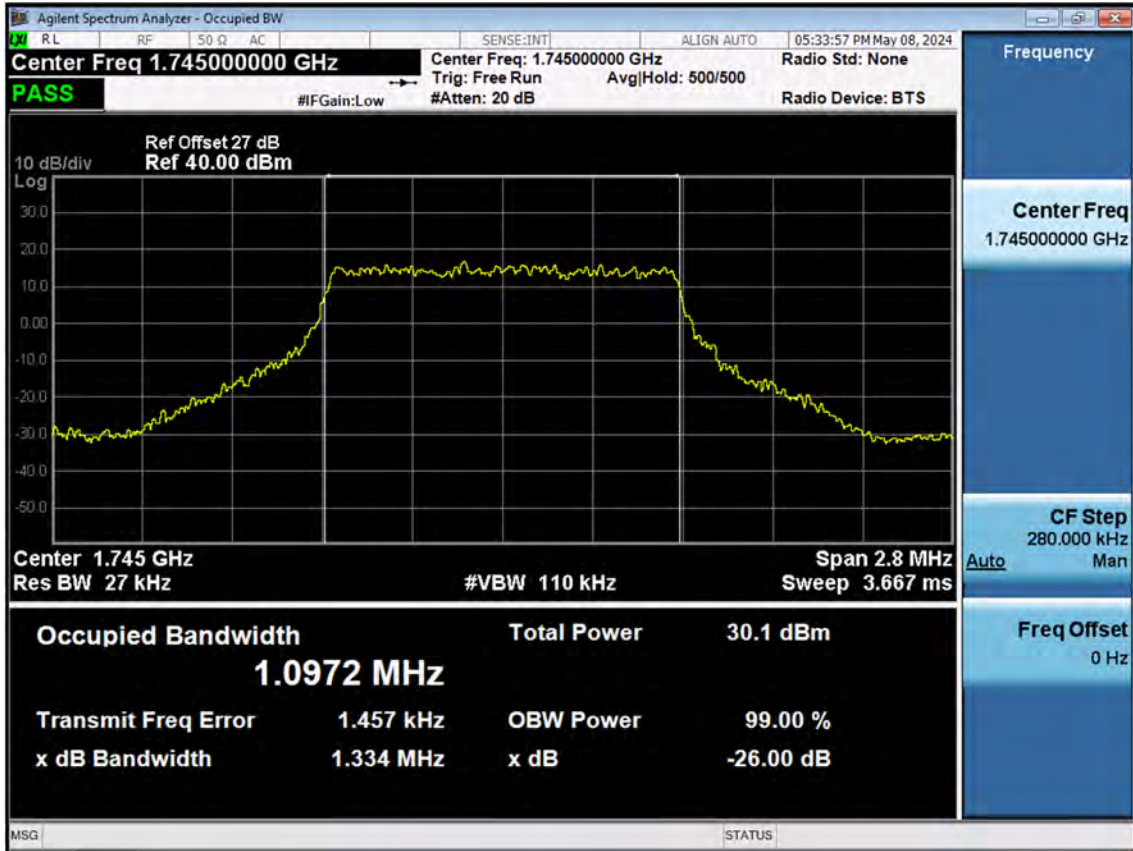


LTE B66_1.4 M_OBW_Mid_16QAM_FullRB

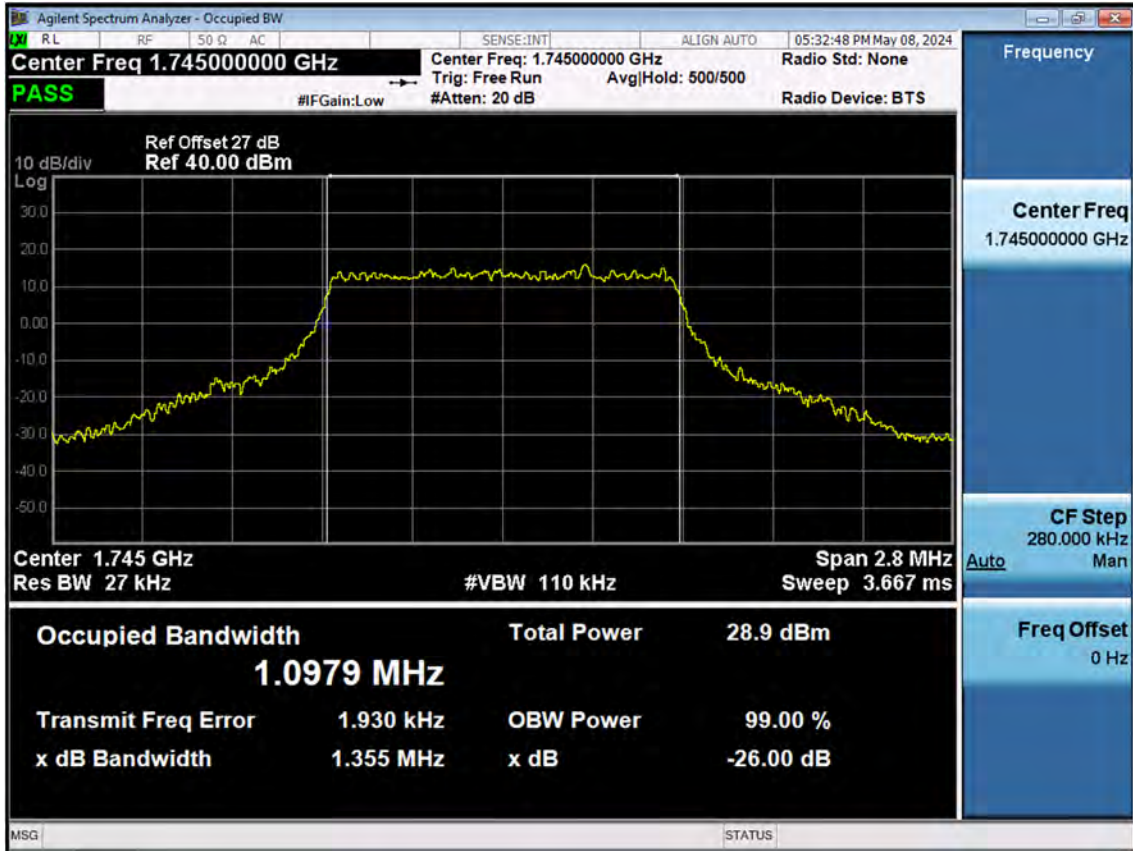


LTE B66_1.4 M_OBW_Mid_64QAM_FullRB

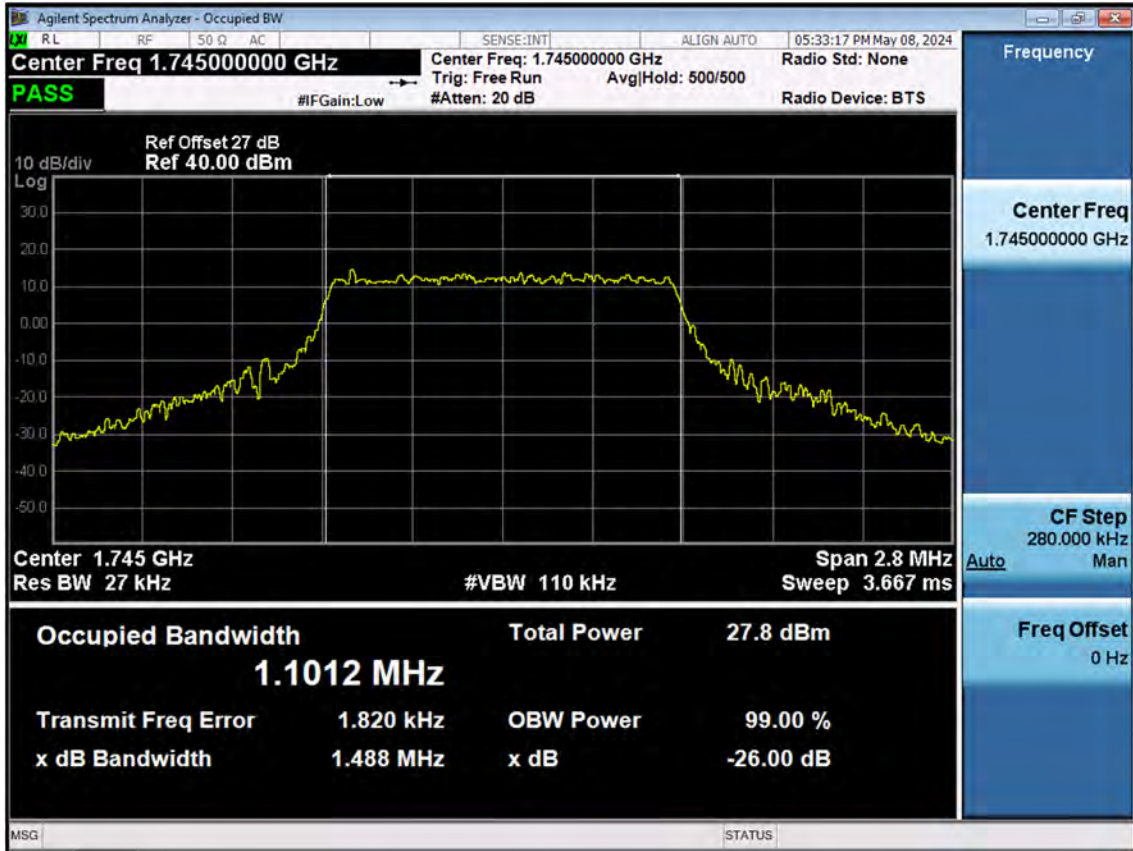


LTE B66_3 M_OBW_Mid_QPSK_FullRB

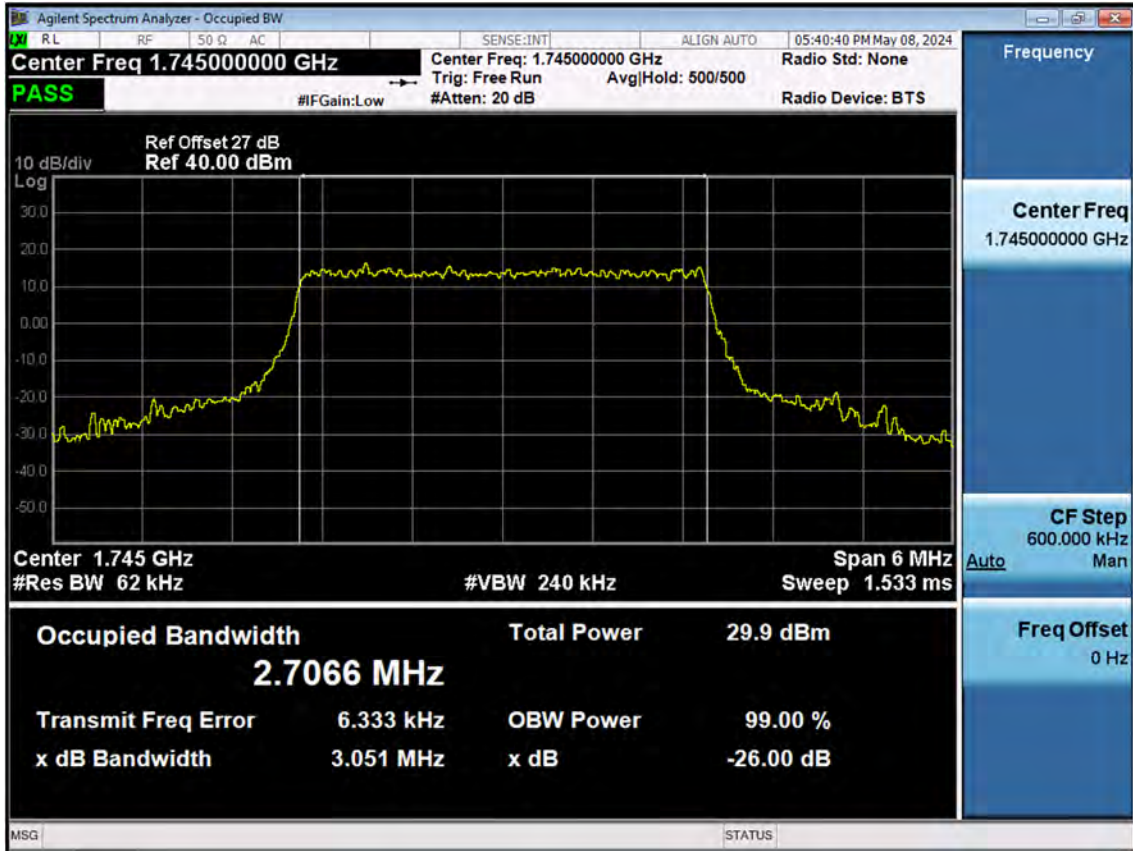


LTE B66_3 M_OBW_Mid_16QAM_FullRB

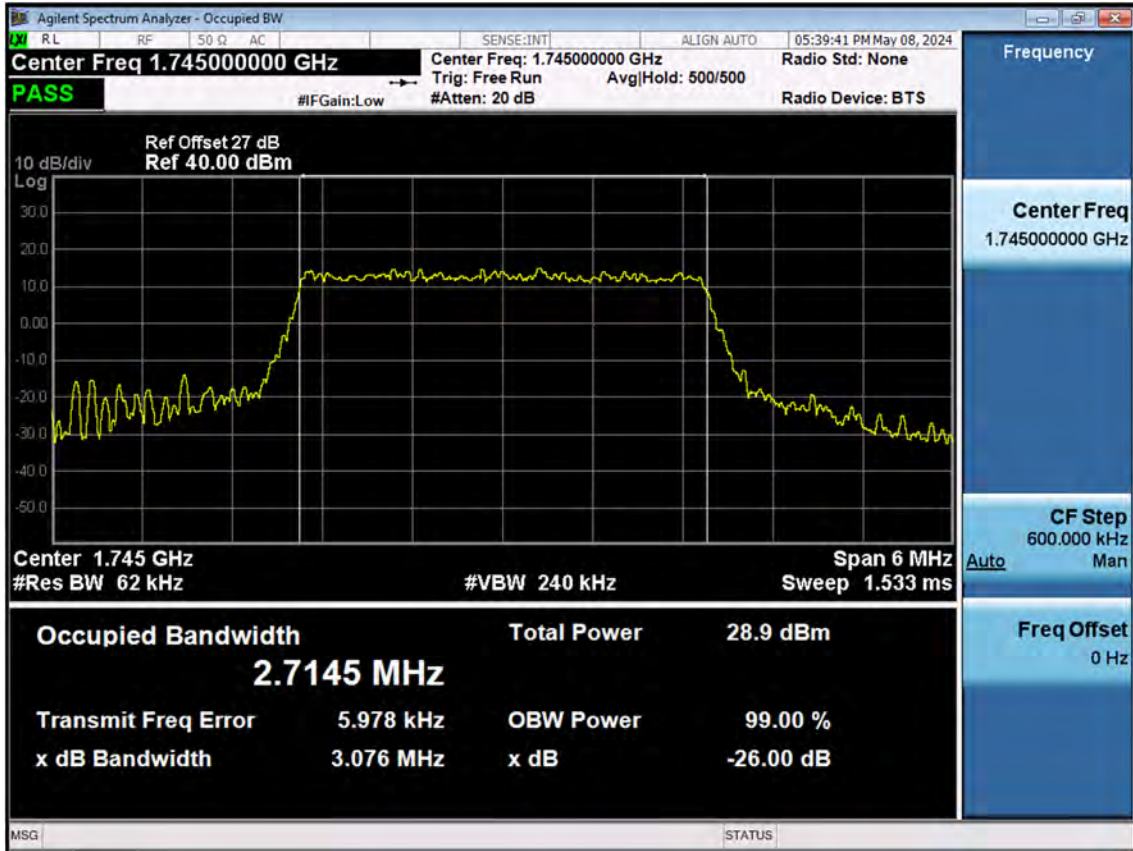


LTE B66_3 M_OBW_Mid_64QAM_FullRB

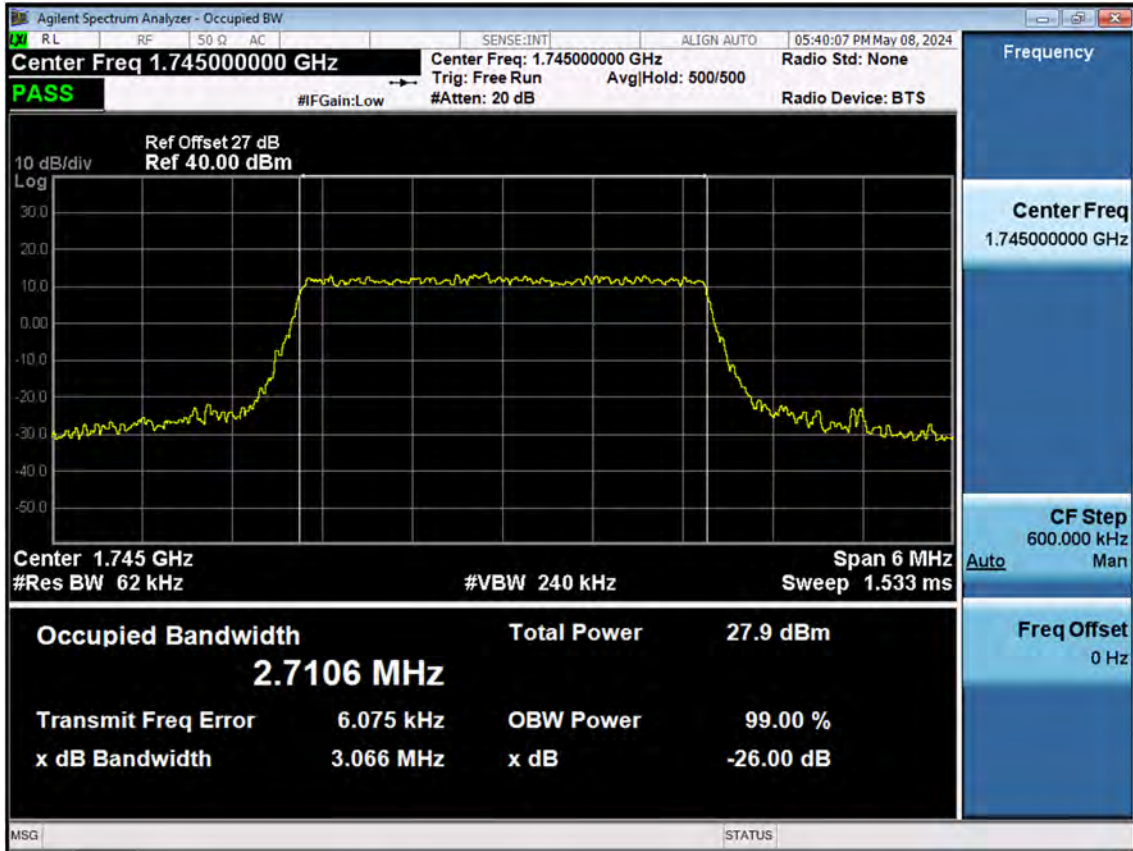


LTE B66_5 M_OBW_Mid_QPSK_FullRB

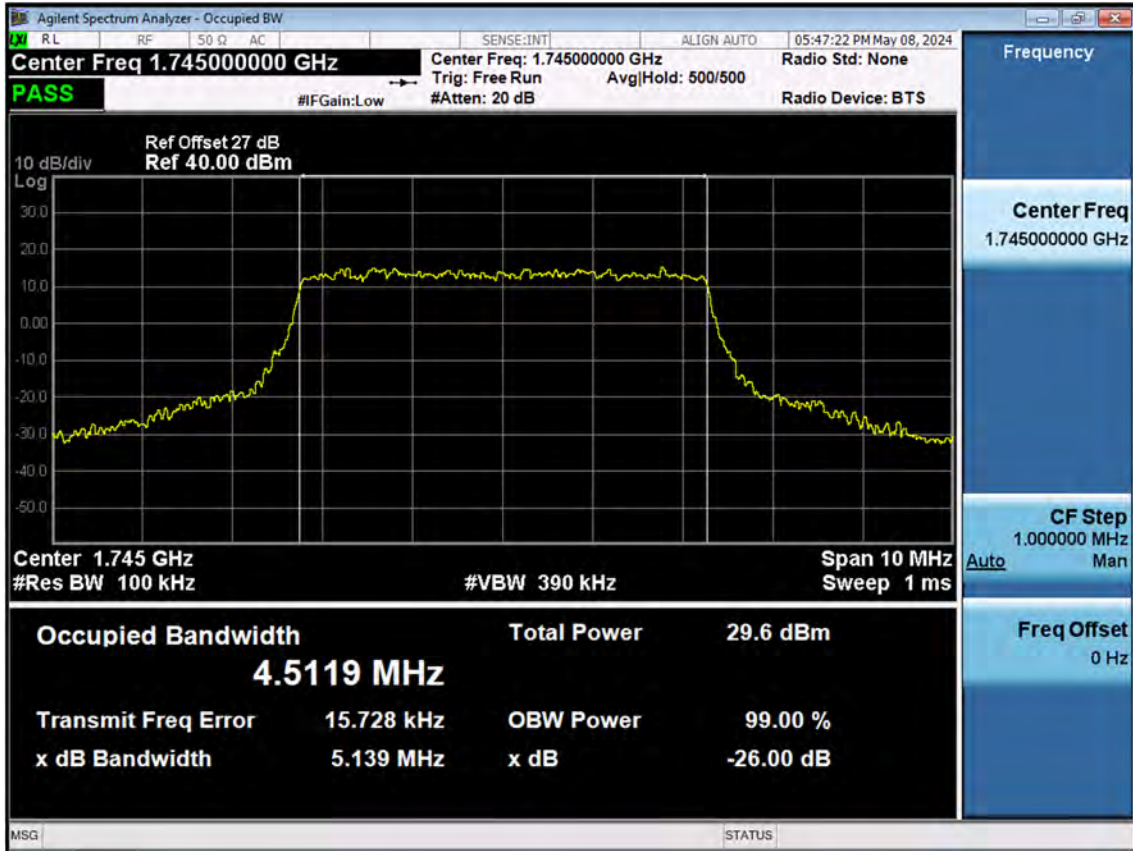


LTE B66_5 M_OBW_Mid_16QAM_FullRB

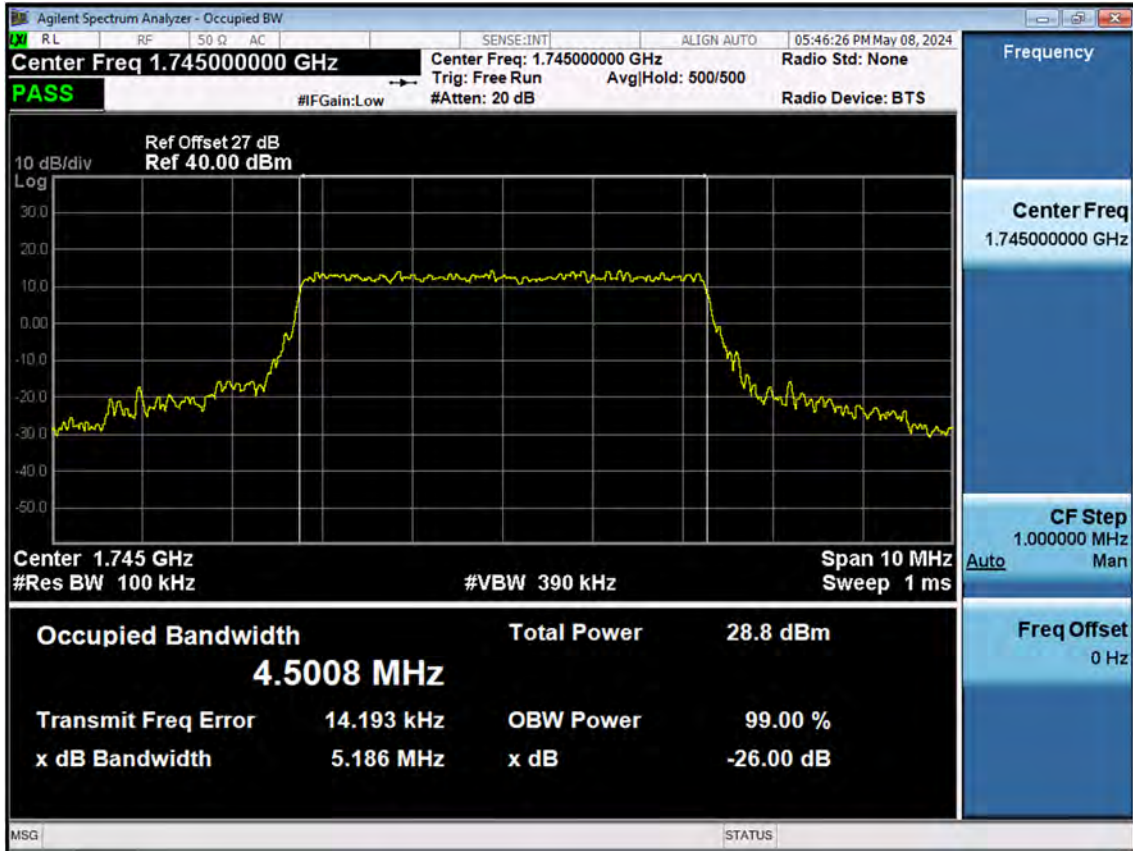


LTE B66_5 M_OBW_Mid_64QAM_FullRB

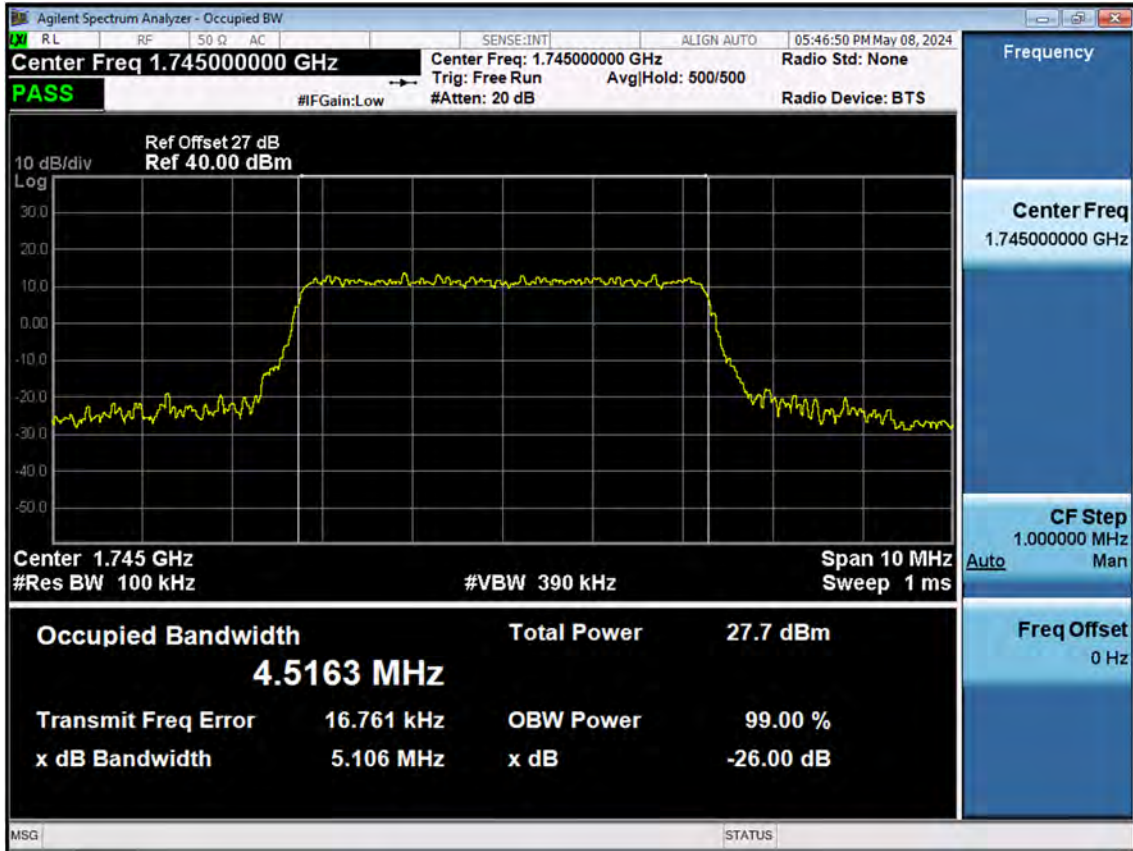


LTE B66_10 M_OBW_Mid_QPSK_FullRB

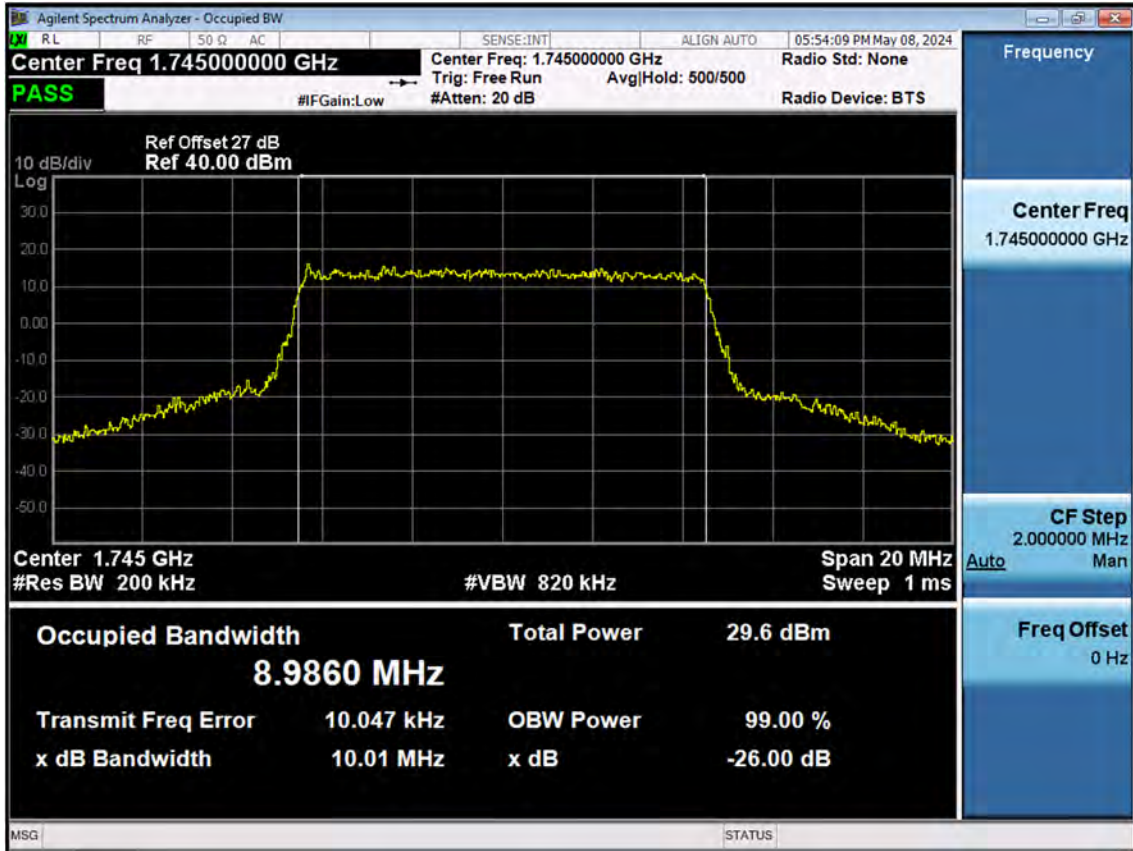


LTE B66_10 M_OBW_Mid_16QAM_FullRB

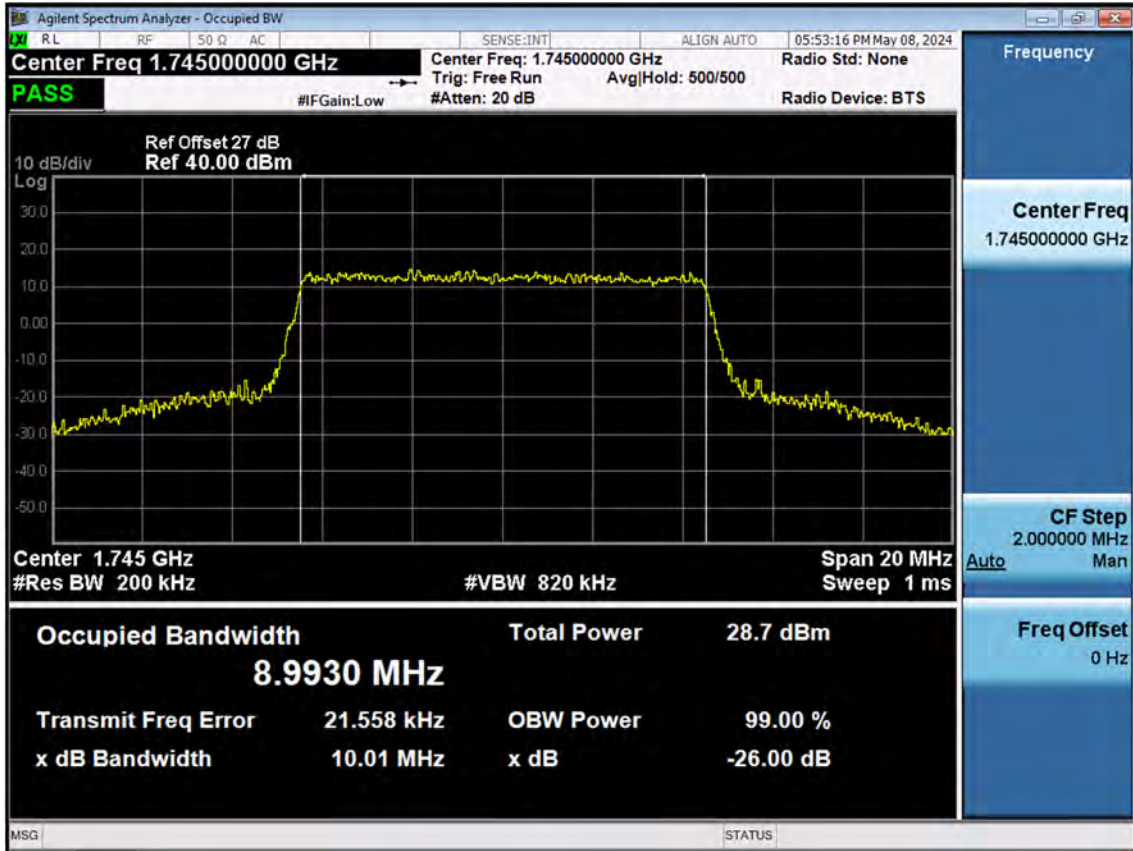


LTE B66_10 M_OBW_Mid_64QAM_FullRB

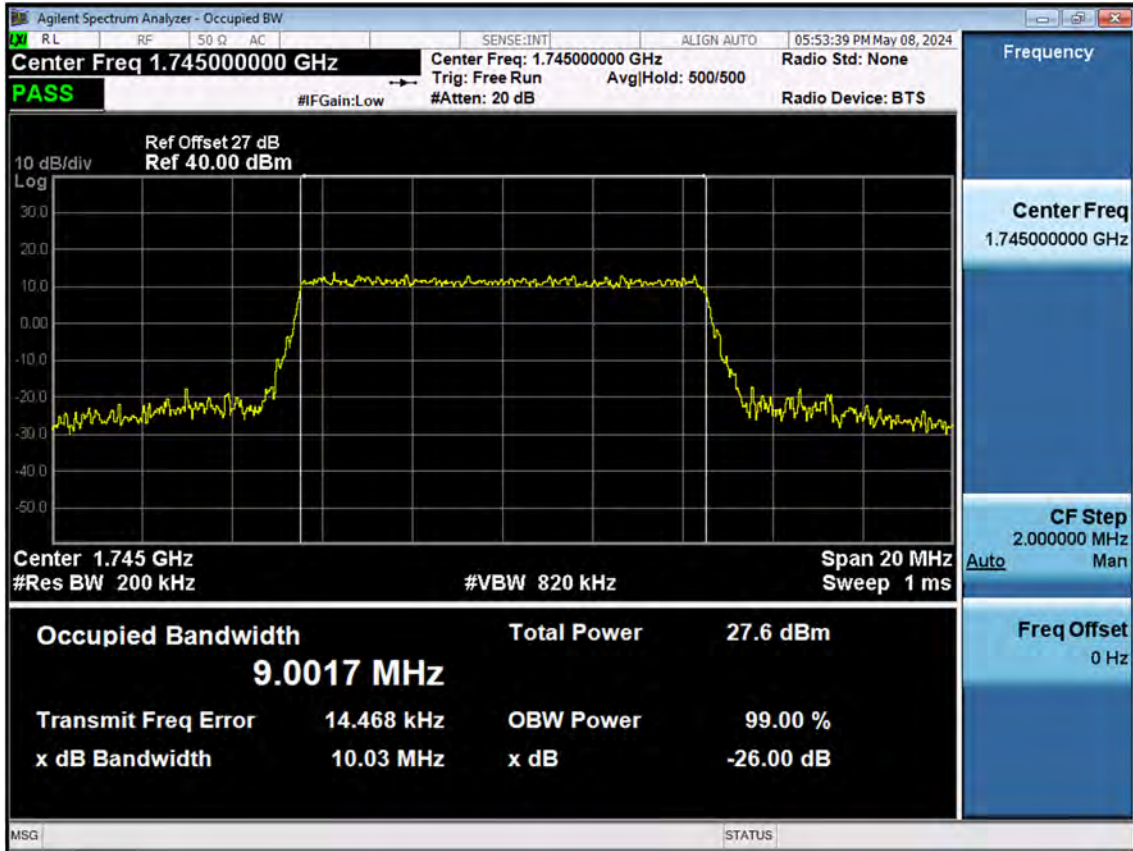


LTE B66_15 M_OBW_Mid_QPSK_FullRB

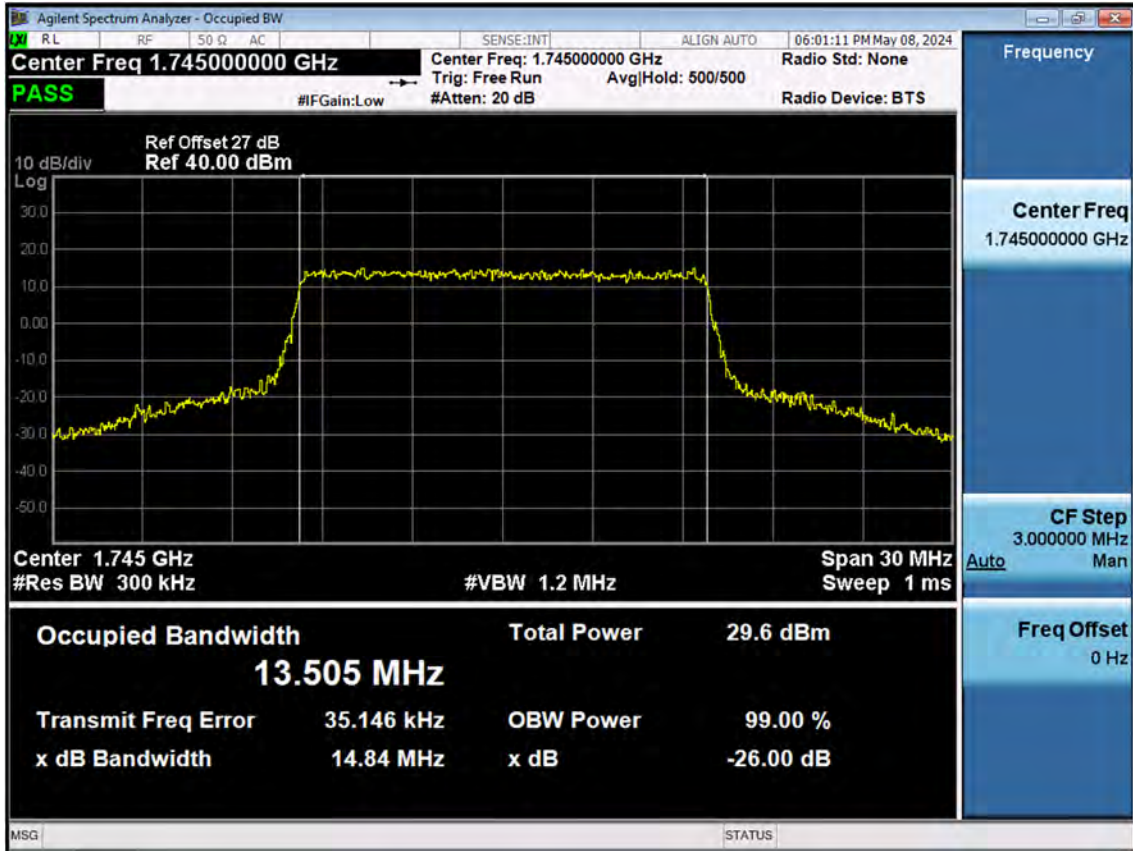


LTE B66_15 M_OBW_Mid_16QAM_FullRB

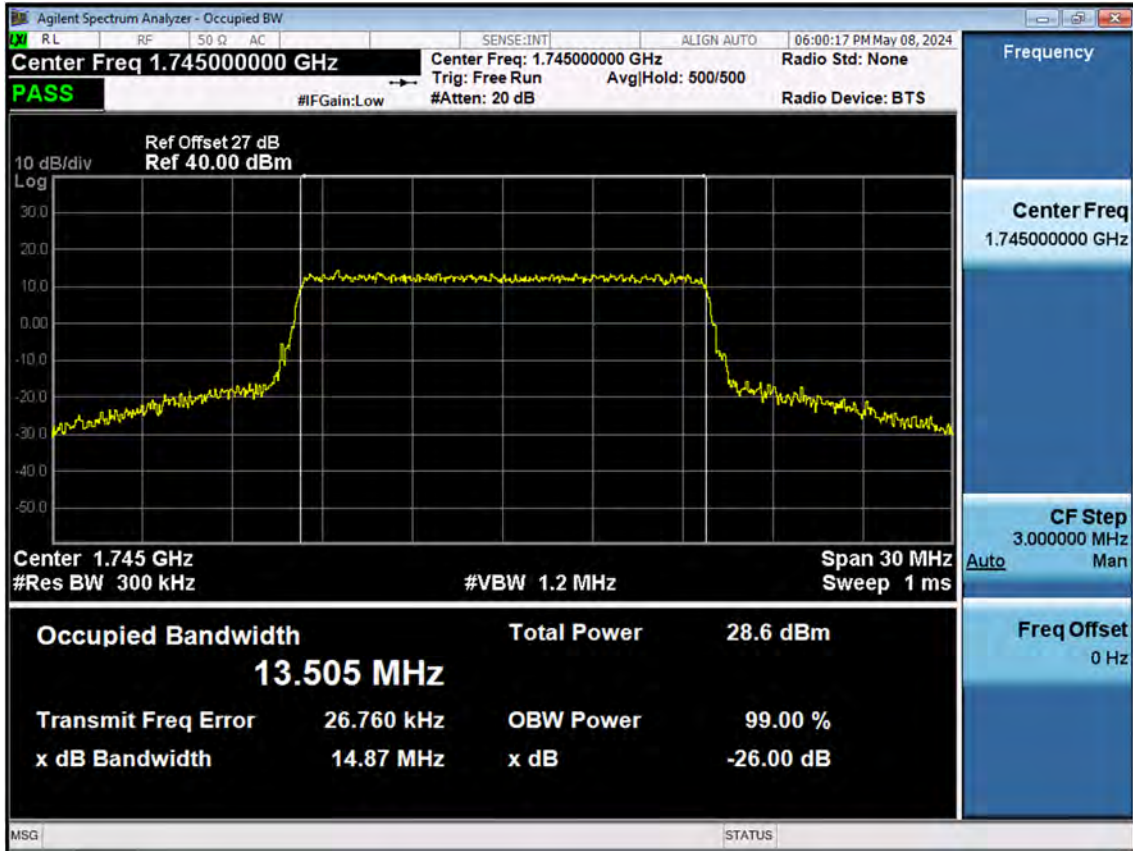


LTE B66_15 M_OBW_Mid_64QAM_FullRB

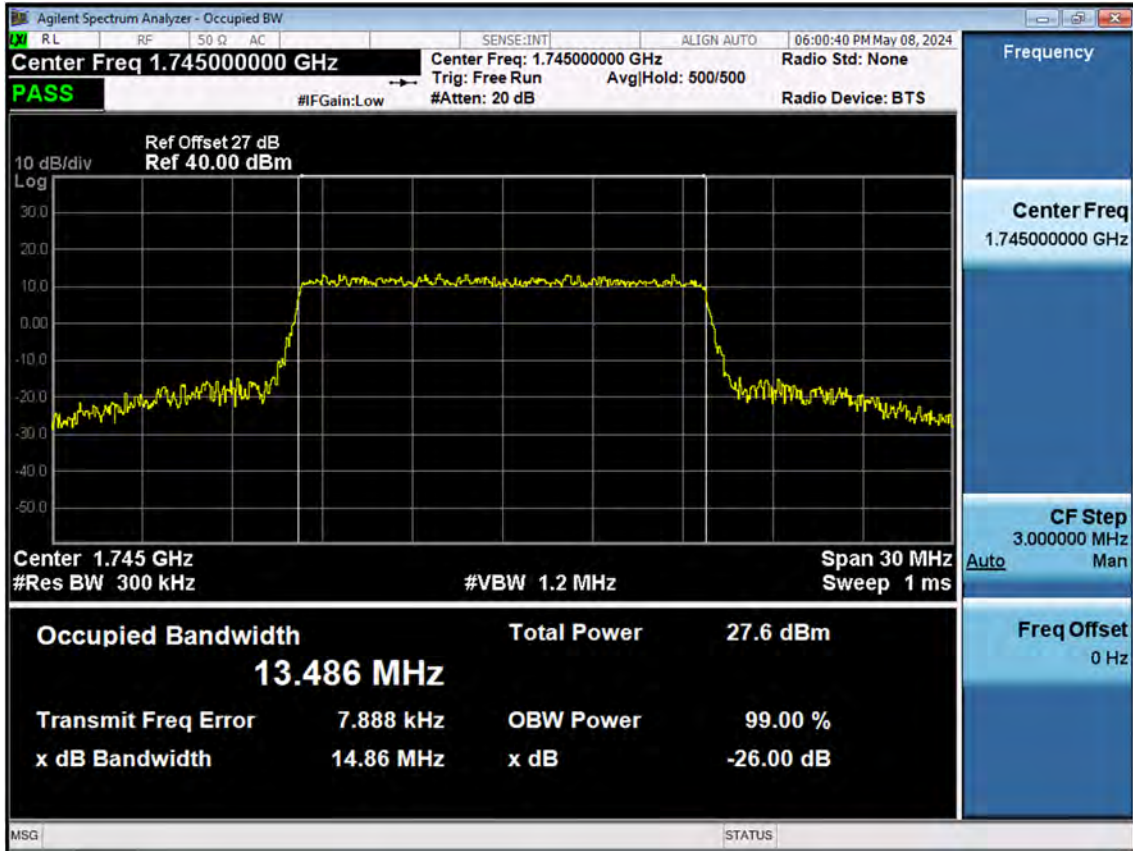


LTE B66_20 M_OBW_Mid_QPSK_FullRB

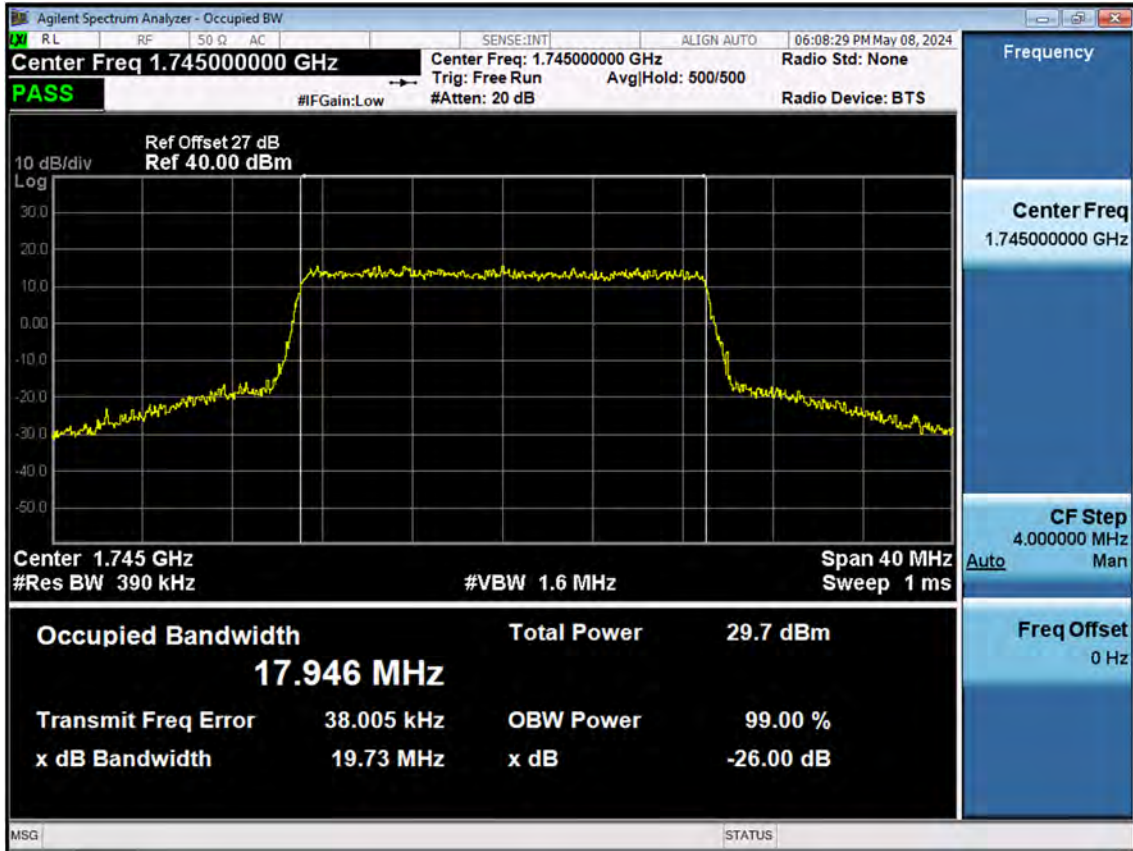


LTE B66_20 M_OBW_Mid_16QAM_FullRB

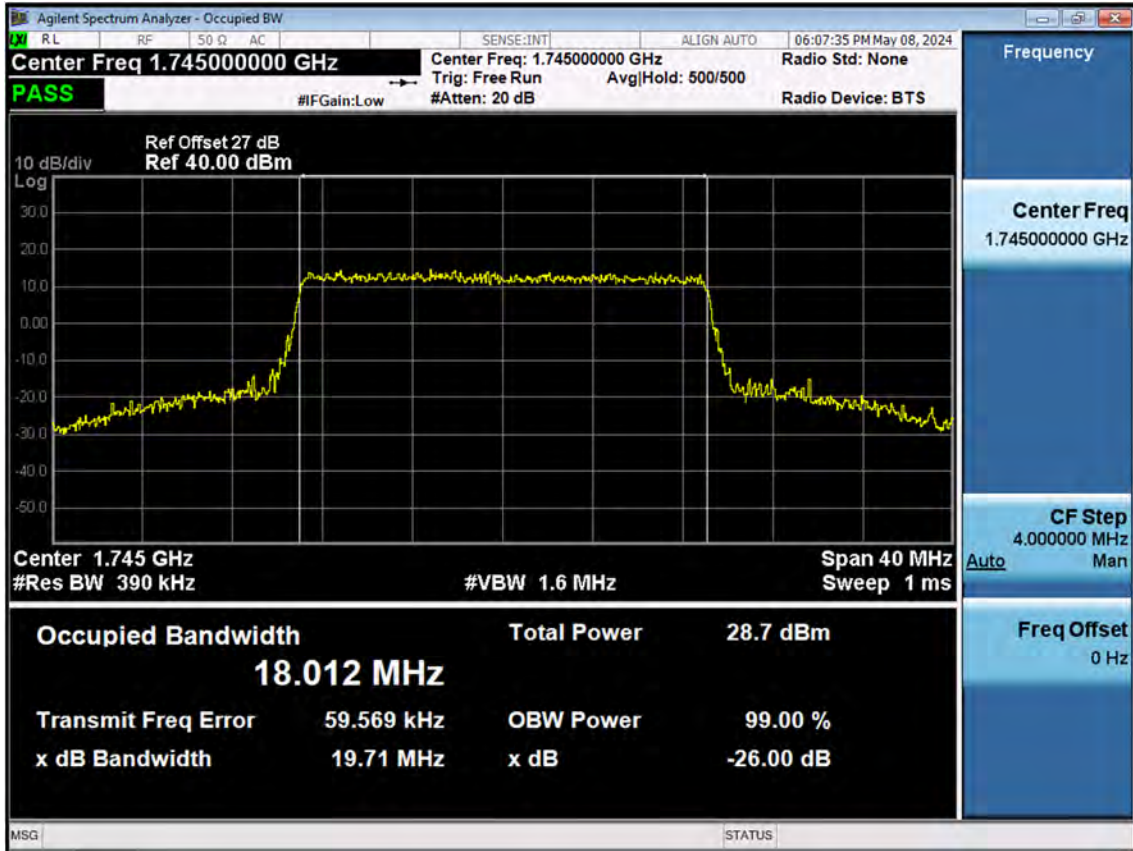


LTE B66_20 M_OBW_Mid_64QAM_FullRB

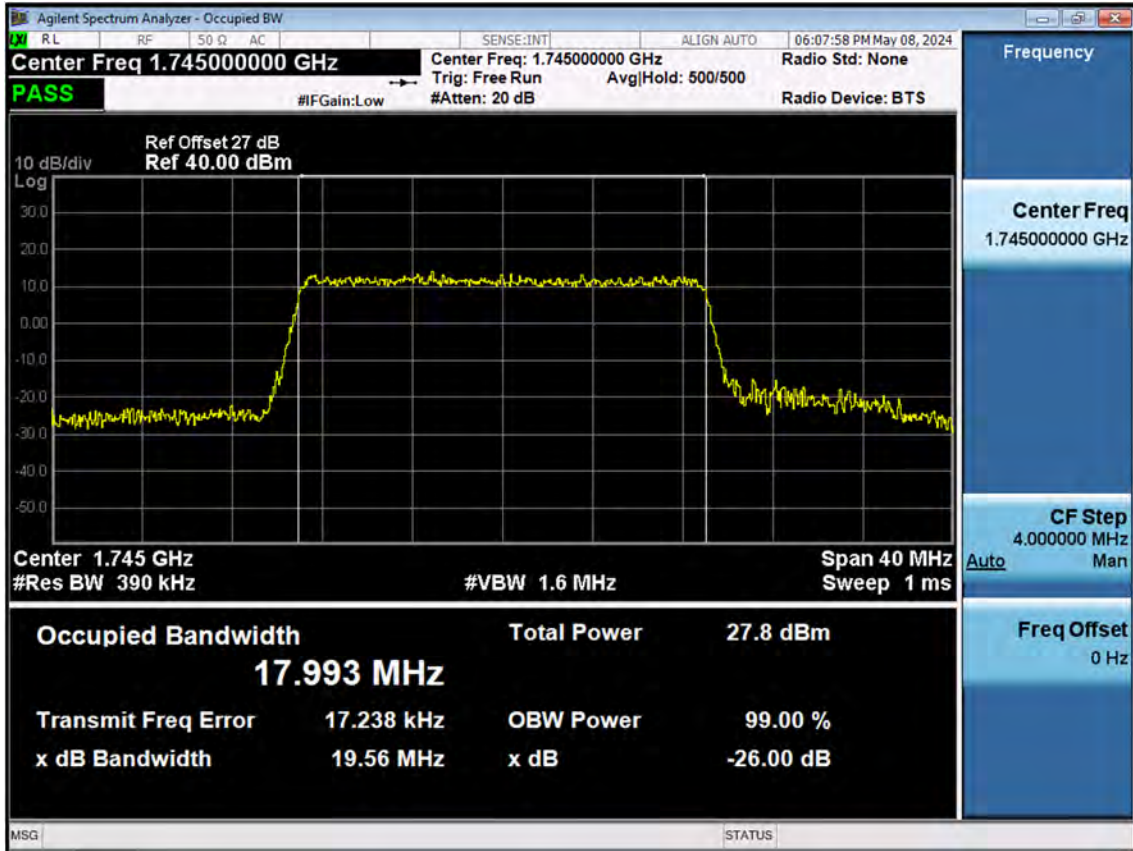


LTE B66_1.4 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

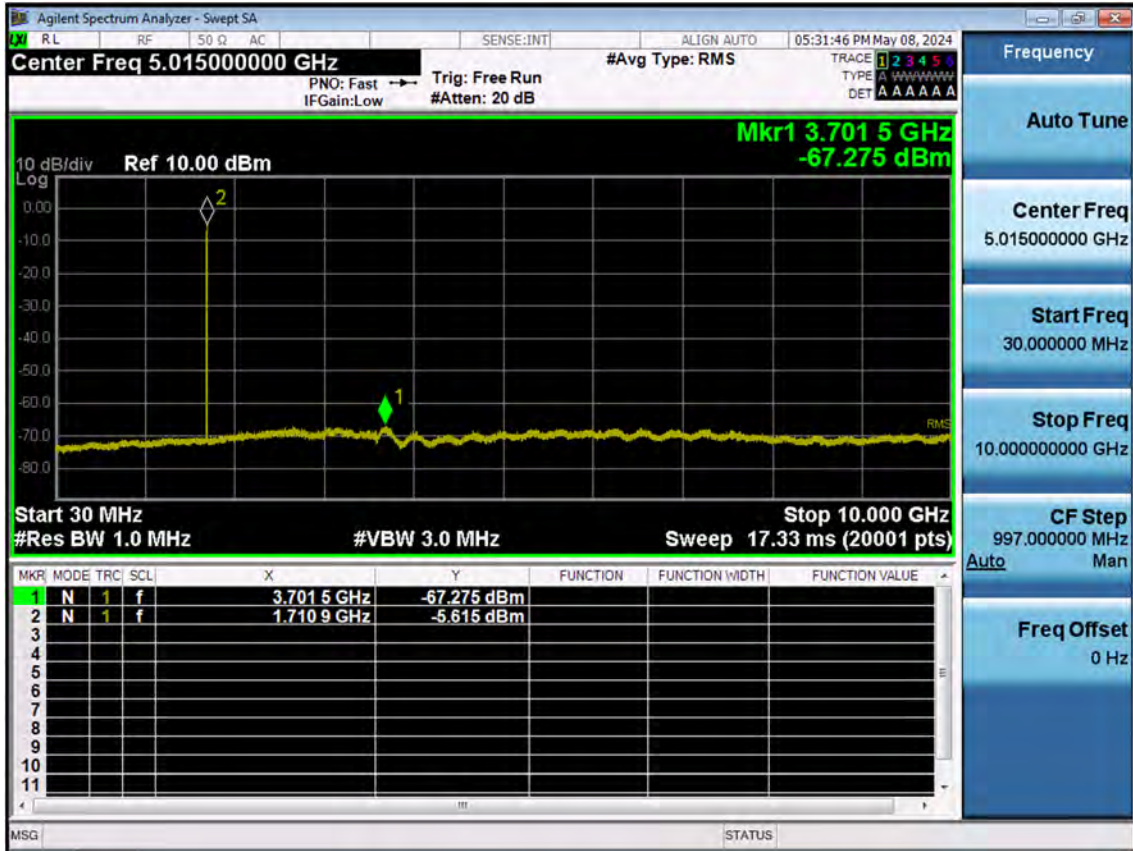


LTE B66_1.4 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

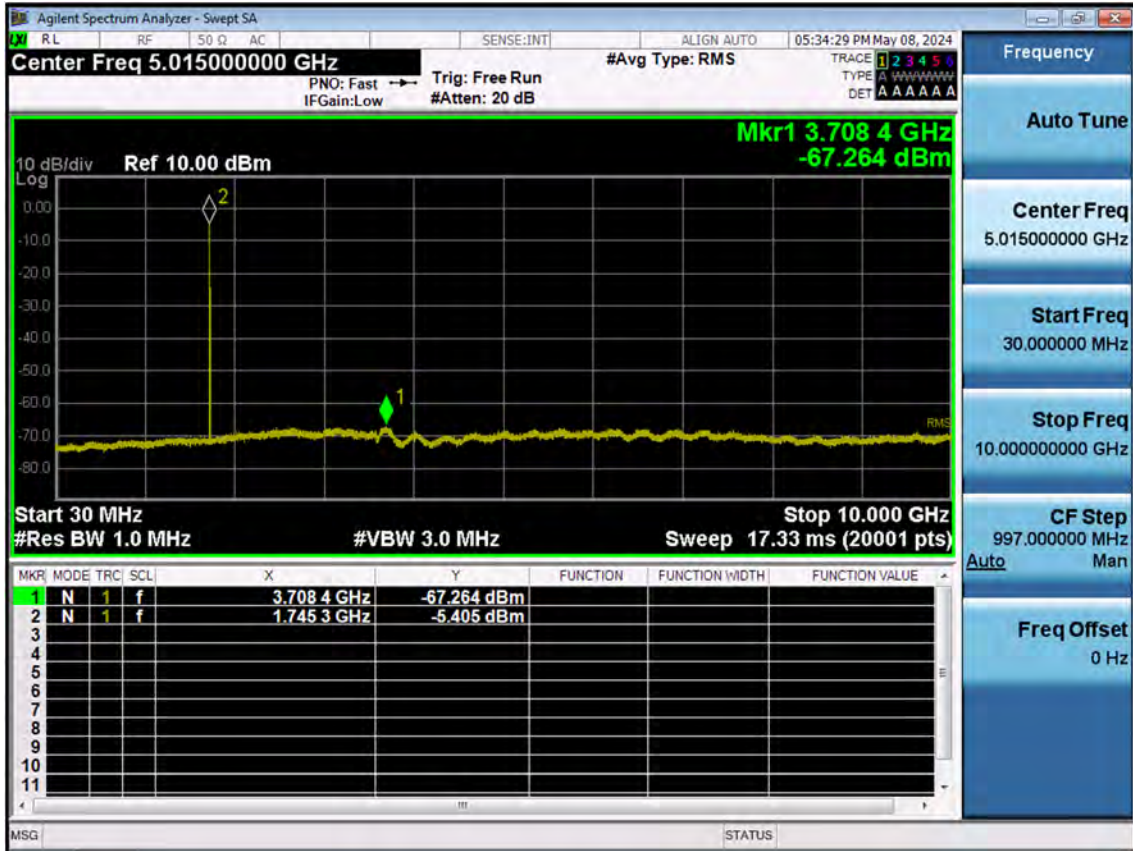


LTE B66_1.4 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

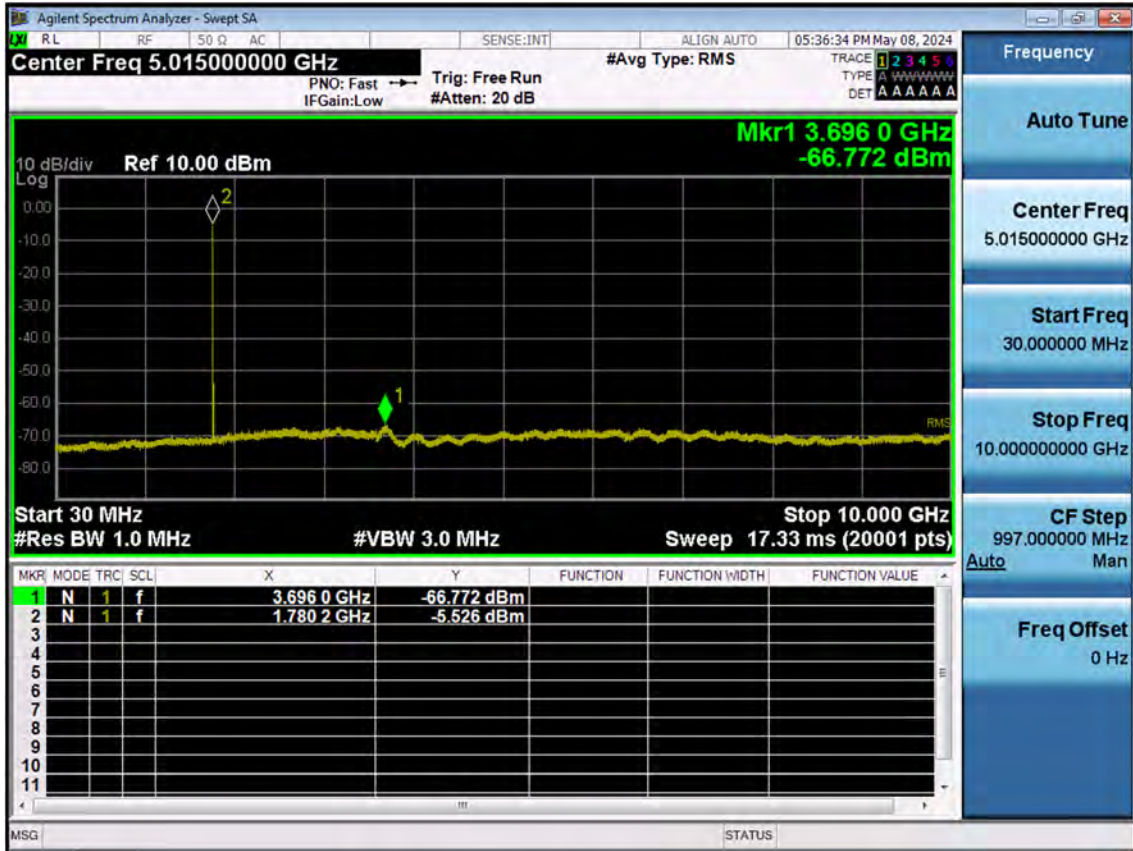


LTE B66_3 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

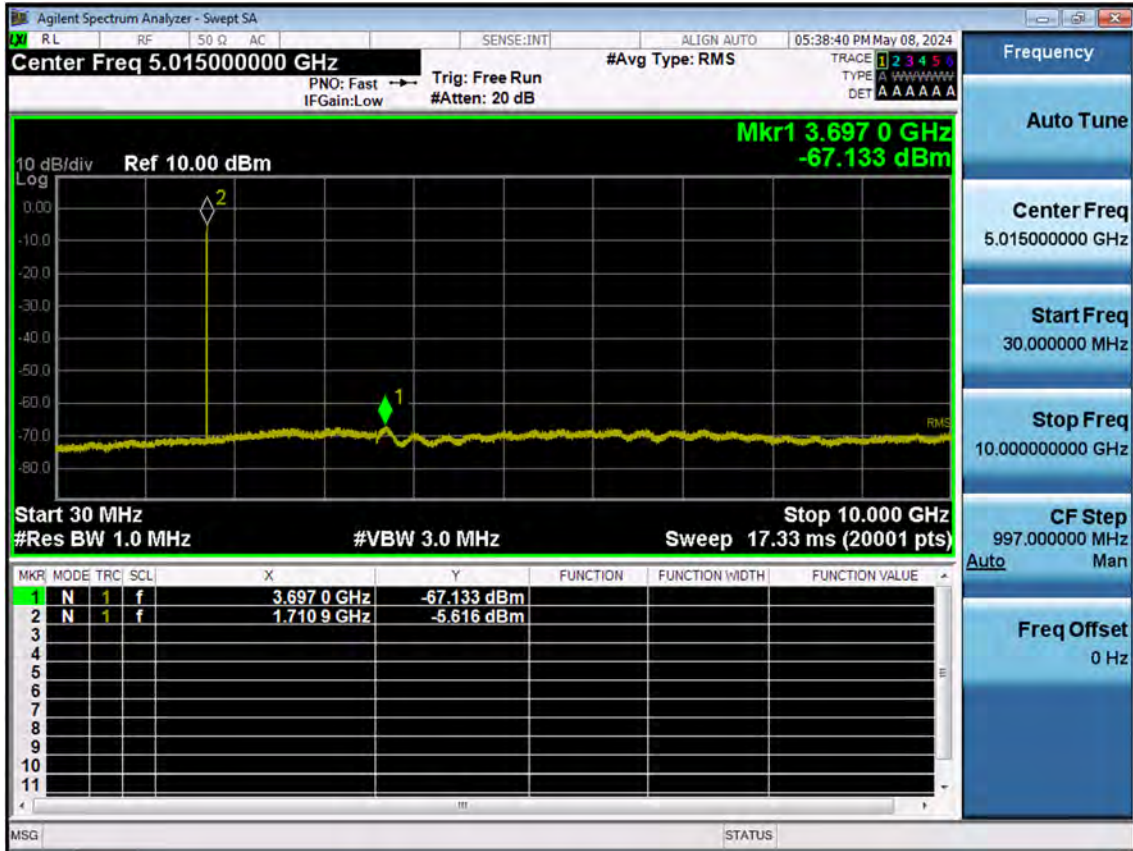


LTE B66_3 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

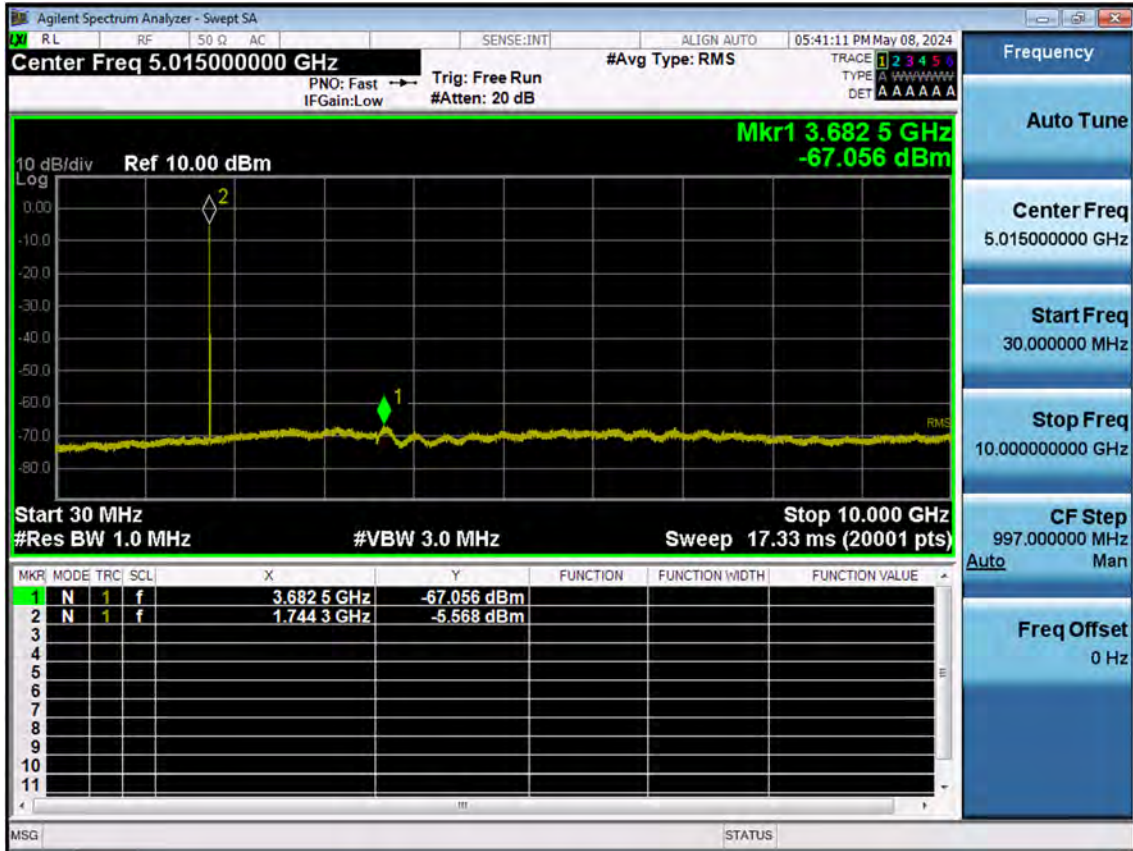


LTE B66_3 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

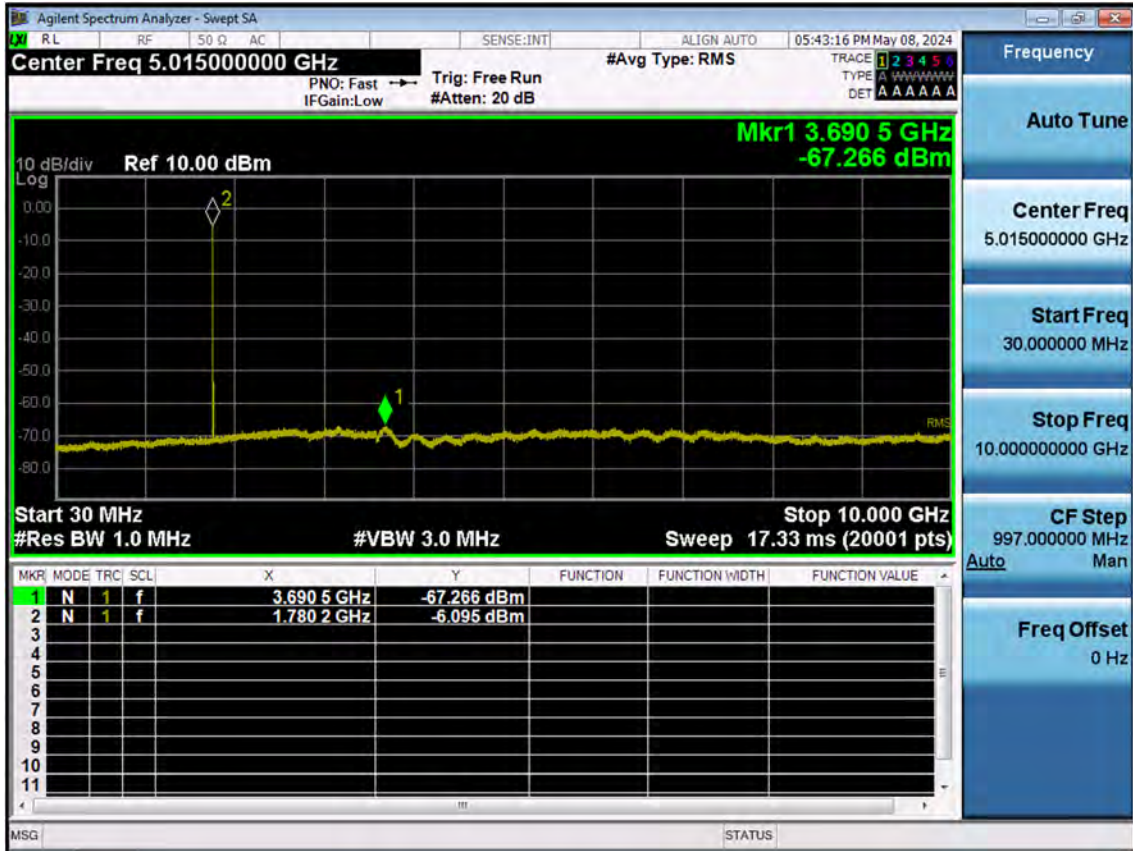


LTE B66_5 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

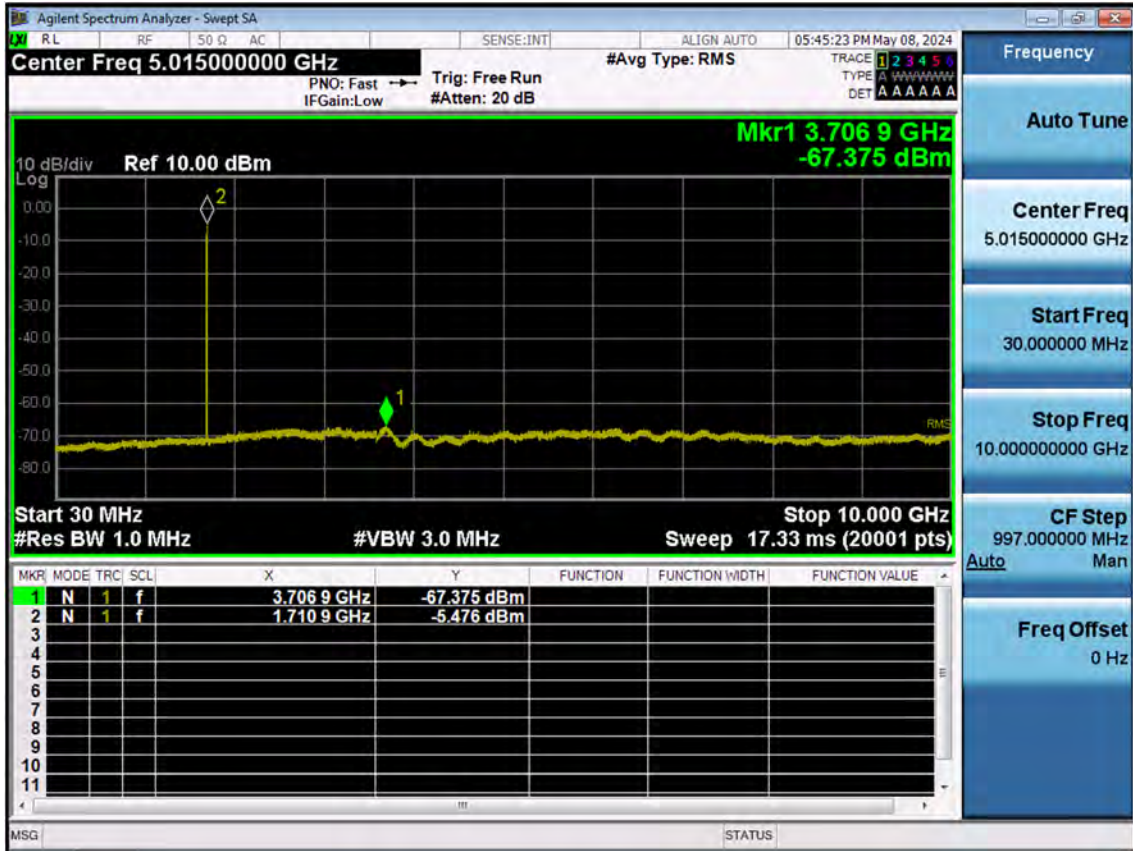


LTE B66_5 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

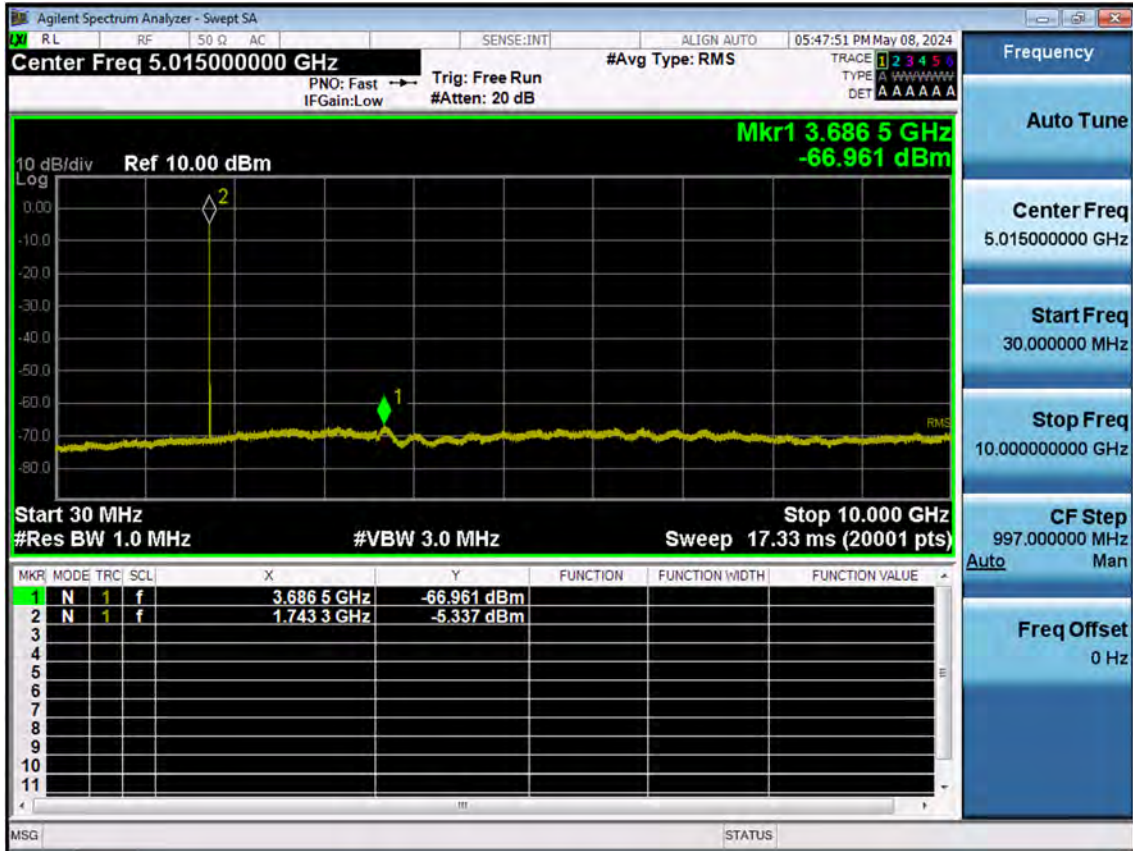


LTE B66_5 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

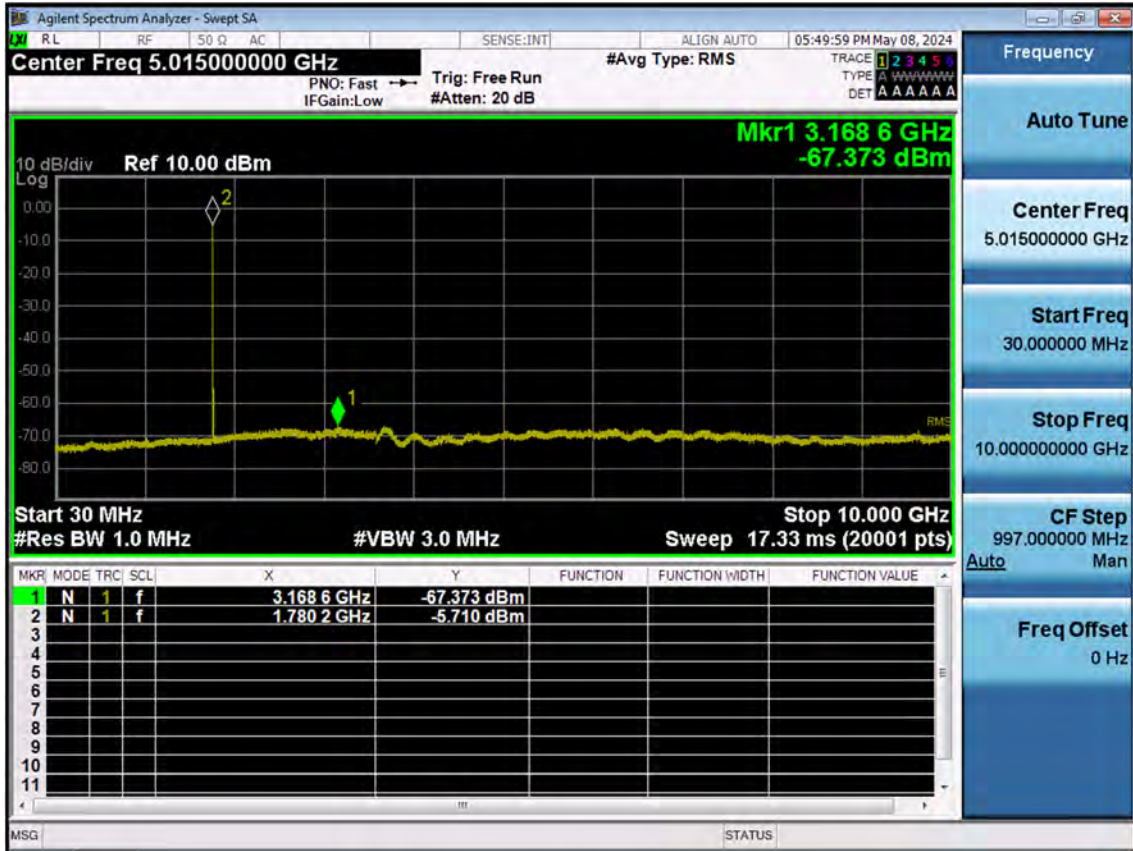


LTE B66_10 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

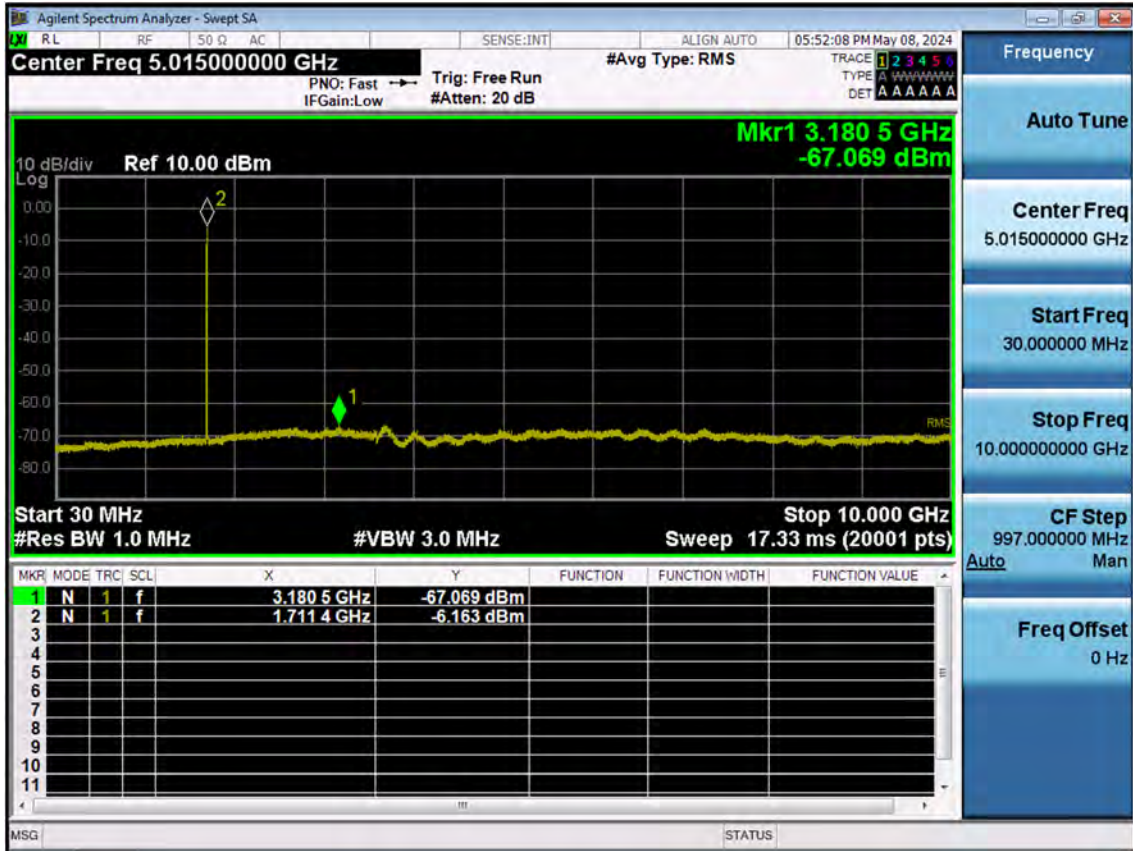


LTE B66_10 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

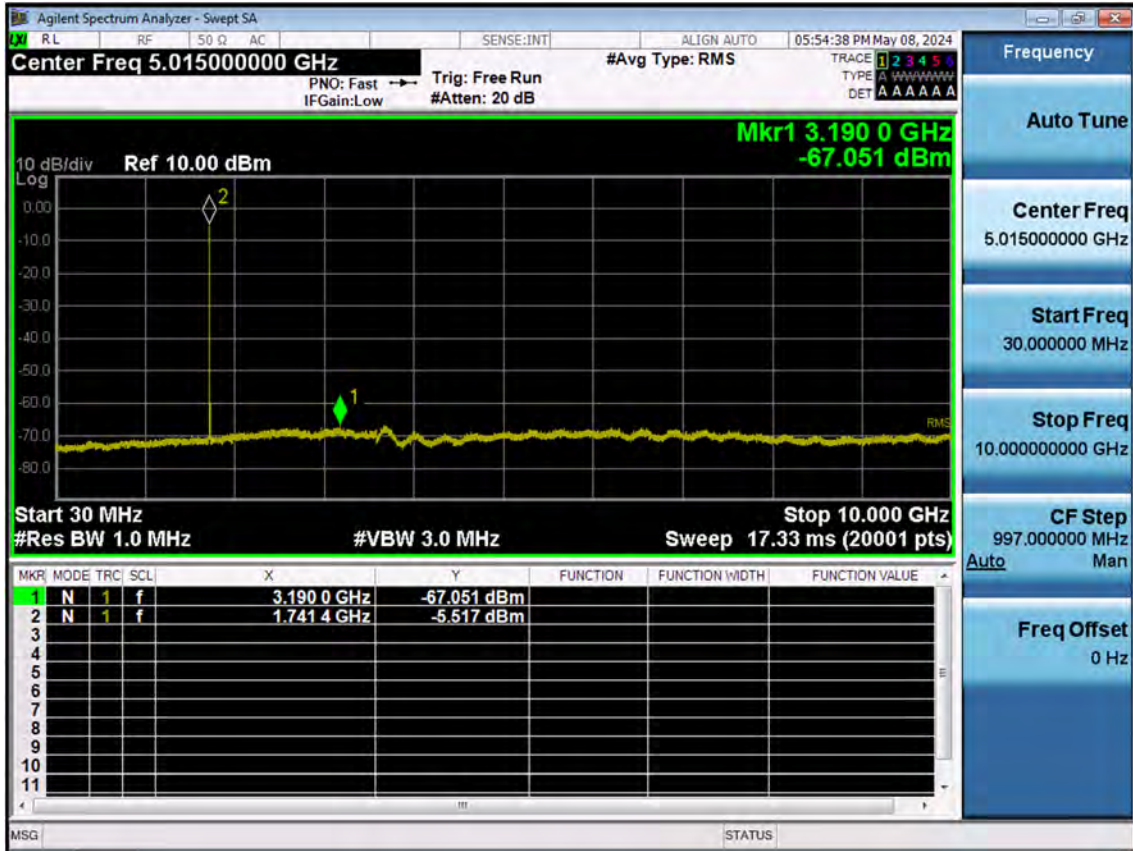


LTE B66_10 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

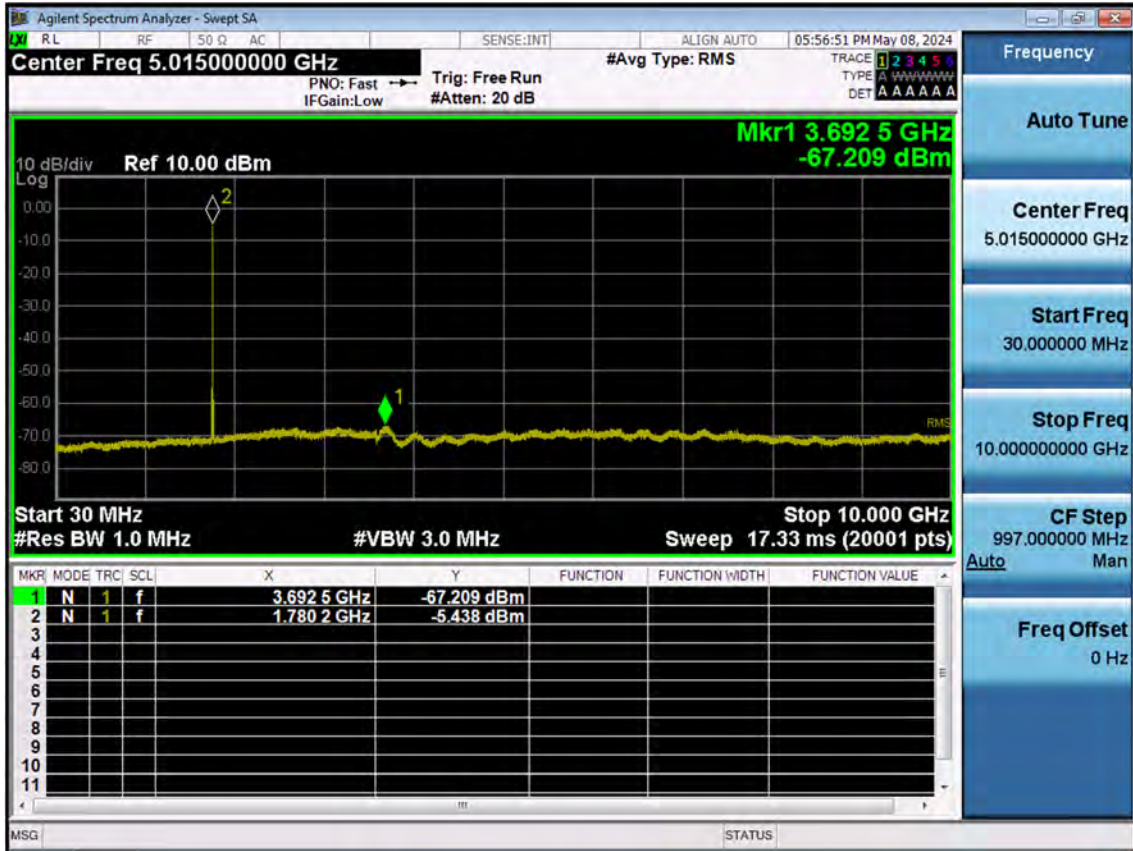


LTE B66_15 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

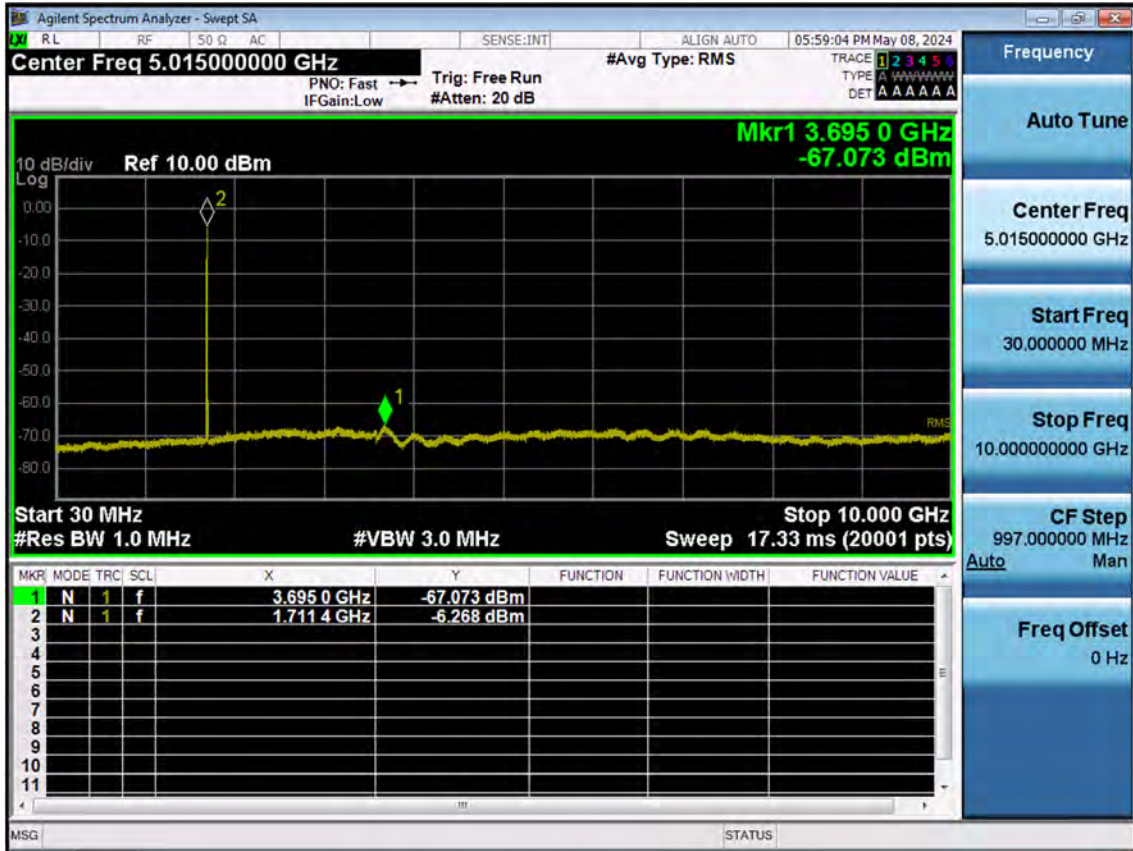


LTE B66_15 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

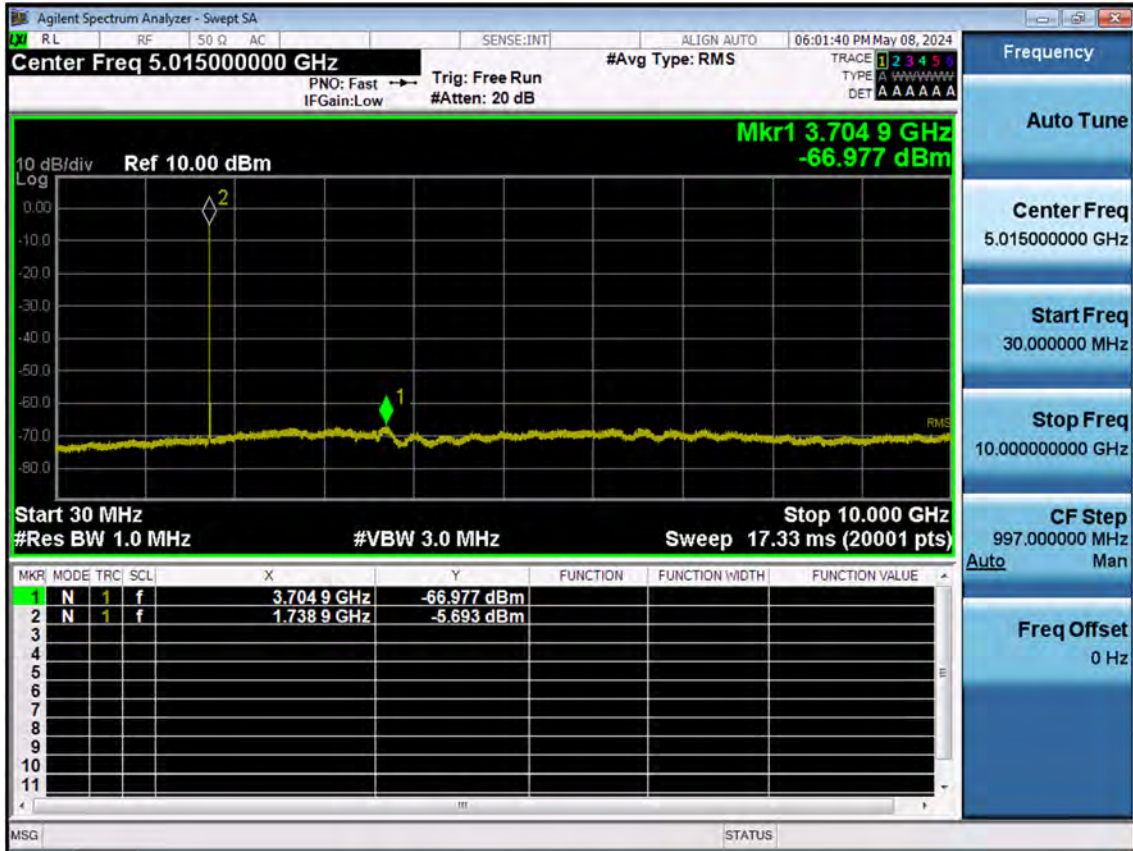


LTE B66_15 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

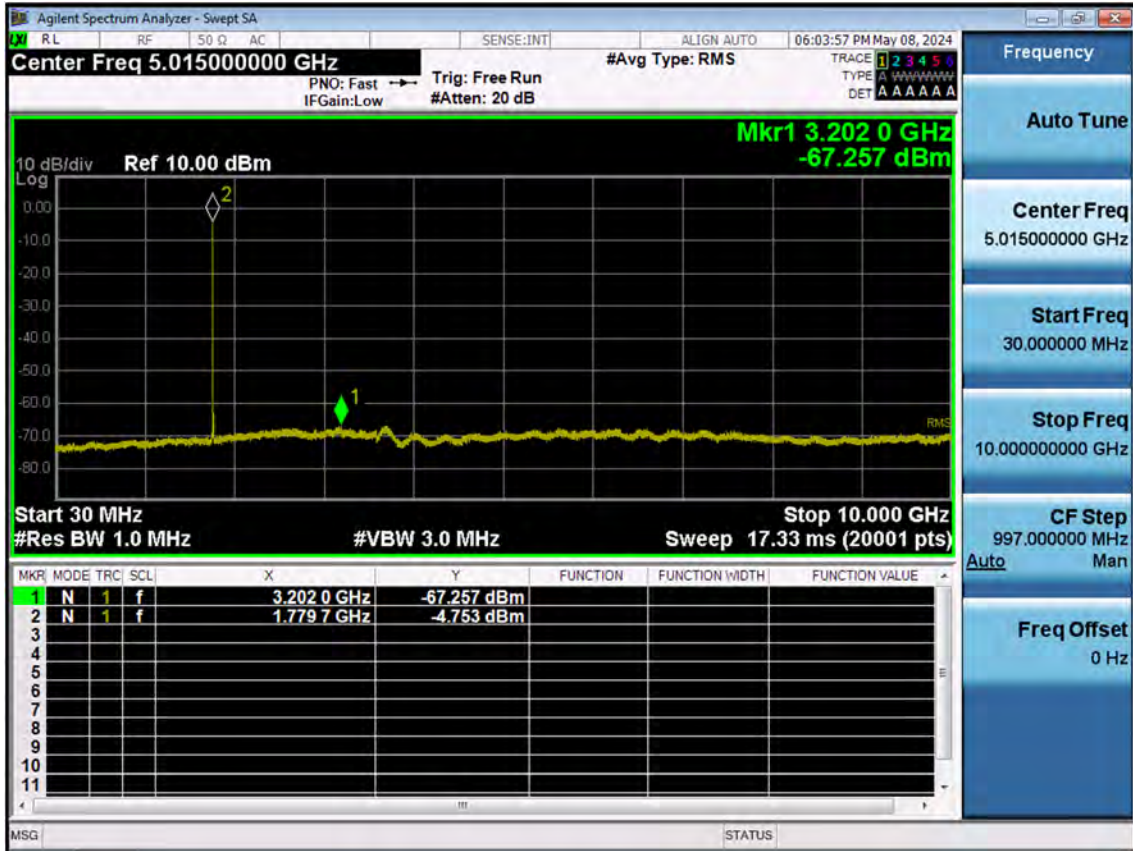


LTE B66_20 M_Conducted Spurious(30 M-10 G)_Low_QPSK_1RB

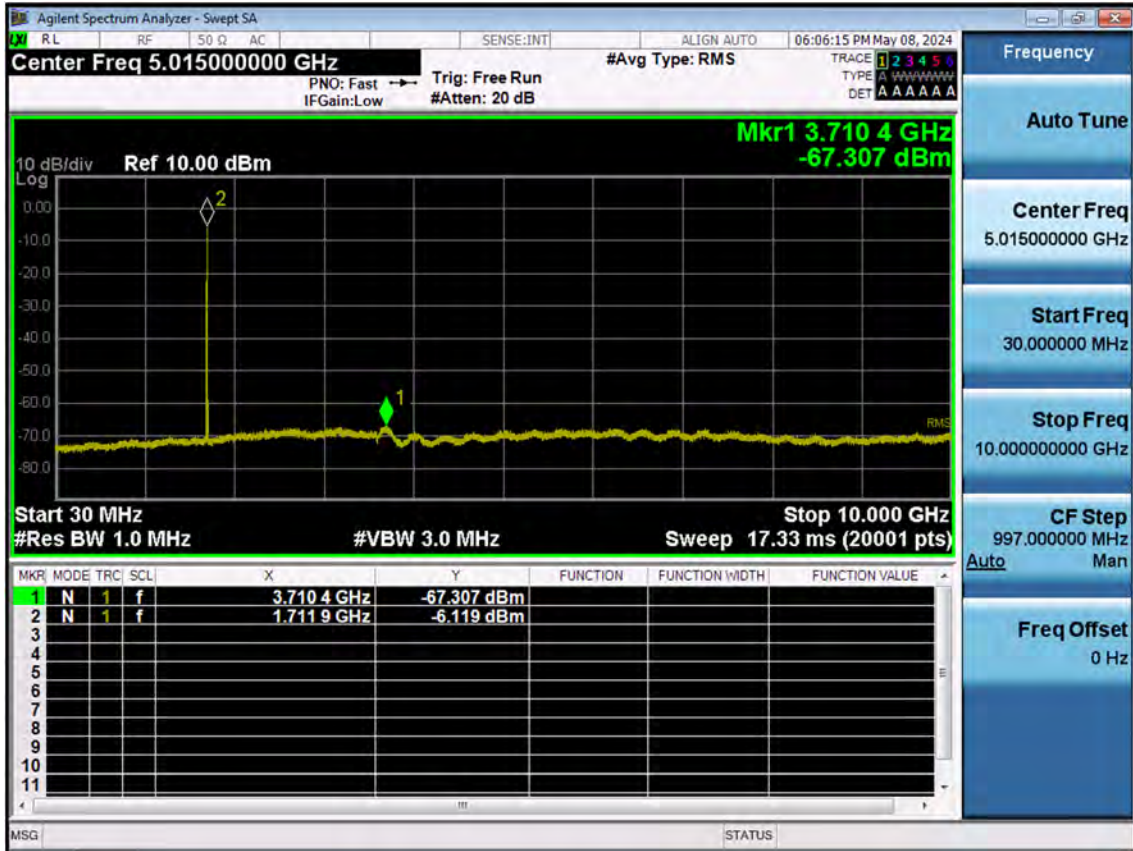

LTE B66_20 M_Conducted Spurious(30 M-10 G)_Mid_QPSK_1RB

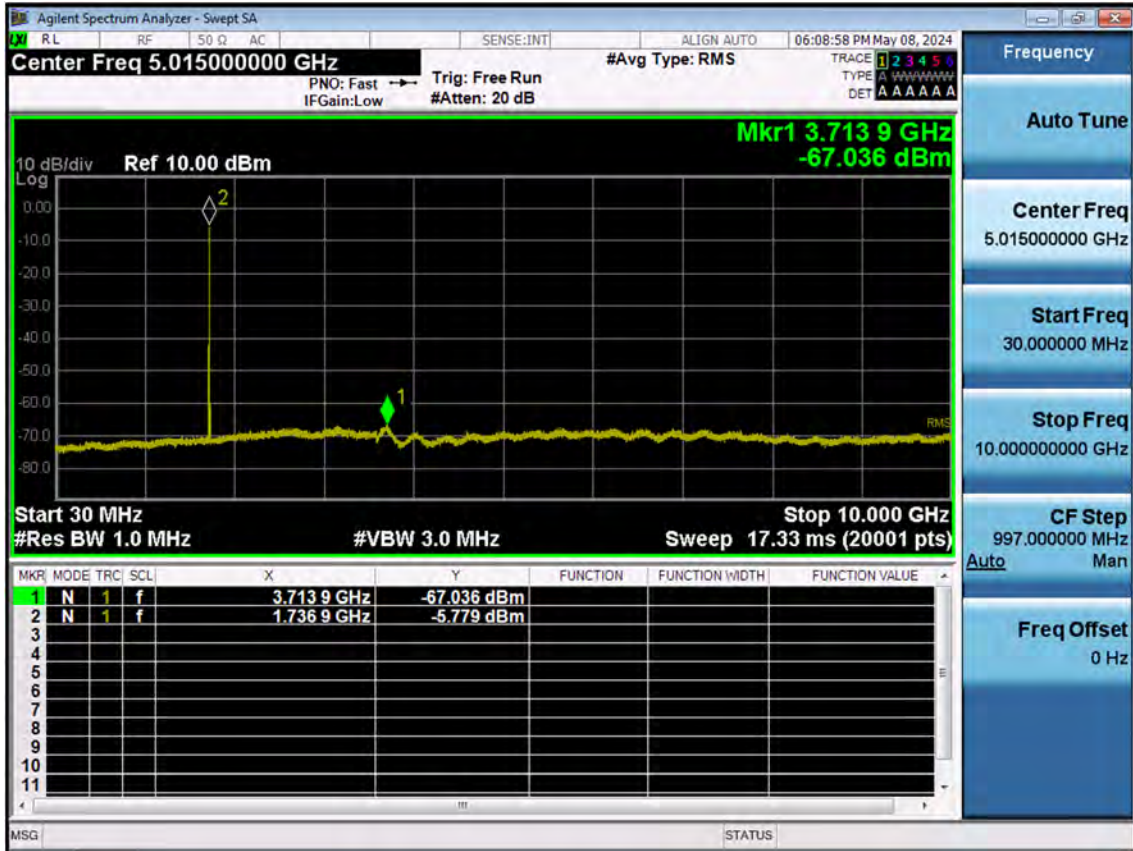

LTE B66_20 M_Conducted Spurious(30 M-10 G)_High_QPSK_1RB

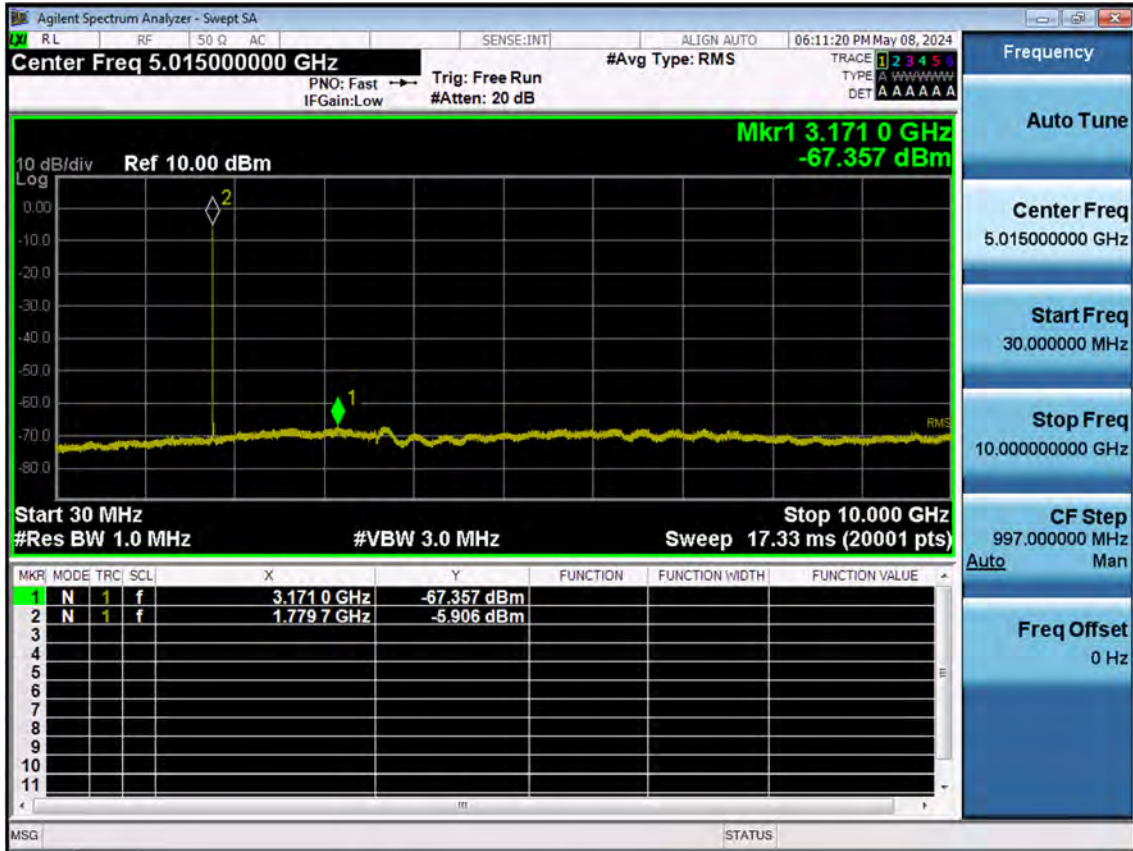

LTE B66_1.4 M_Conducted Spurious(10 G-26.5 G)_Low_QPSK_1RB



LTE B66_1.4 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_1.4 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB



LTE B66_3 M_Conducted Spurious(10 G-26.5 G)_Low_QPSK_1RB



LTE B66_3 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_3 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB



LTE B66_5 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_5 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB



LTE B66_10 M_Conducted Spurious(10 G-26.5 G)_Low_QPSK_1RB



LTE B66_10 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_10 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB



LTE B66_15 M_Conducted Spurious(10 G-26.5 G)_Low_QPSK_1RB



LTE B66_15 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_15 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB



LTE B66_20 M_Conducted Spurious(10 G-26.5 G)_Low_QPSK_1RB




LTE B66_20 M_Conducted Spurious(10 G-26.5 G)_Mid_QPSK_1RB



LTE B66_20 M_Conducted Spurious(10 G-26.5 G)_High_QPSK_1RB




LTE B66_1.4 M_Band Edge_Low_QPSK_1RB

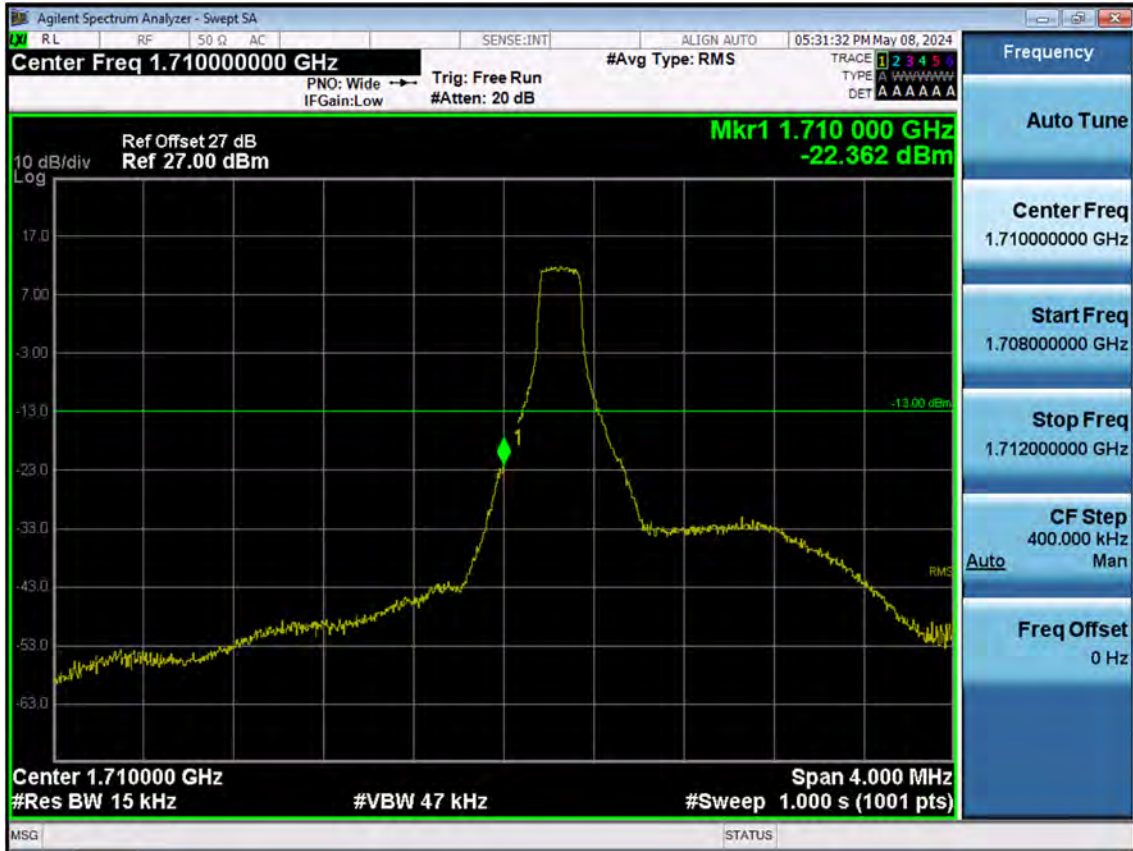

LTE B66_1.4 M_Band Edge_Low_QPSK_FullRB



LTE B66_1.4 M_Extended Band Edge_Low_QPSK_FullRB

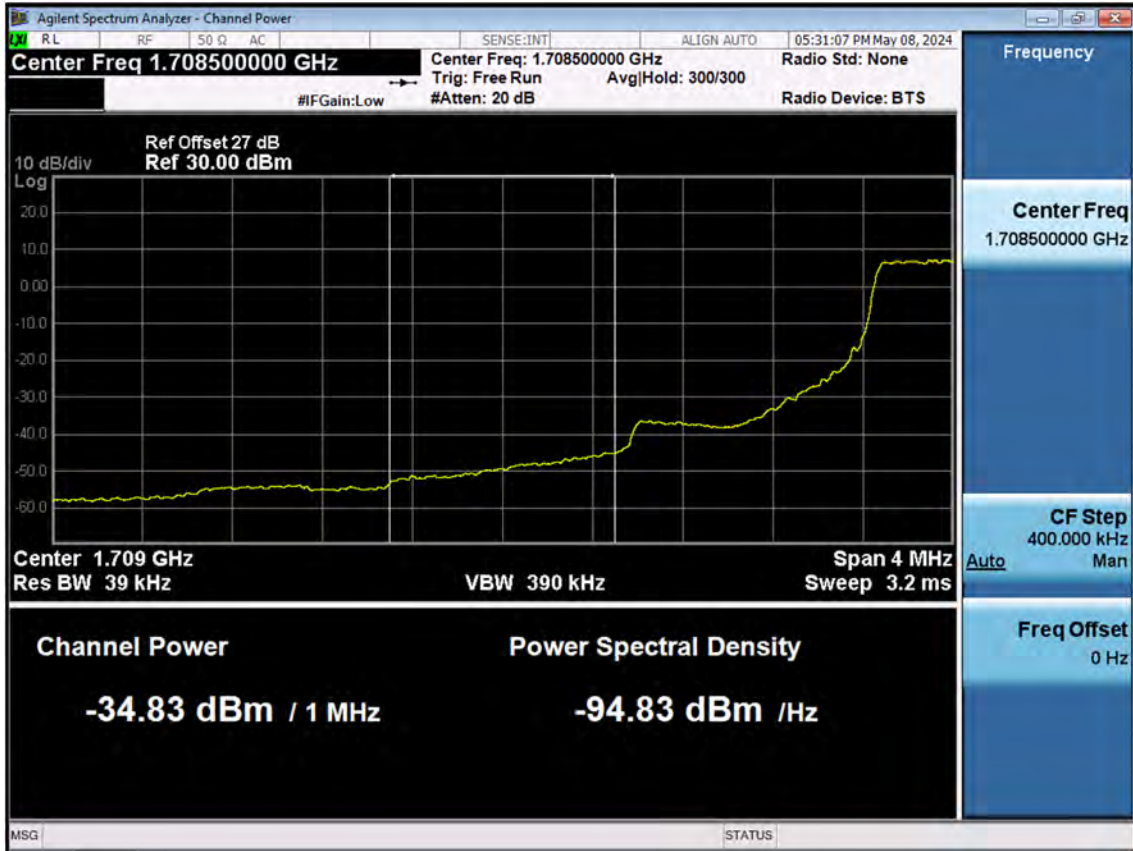


LTE B66_1.4 M_Band Edge_High_QPSK_1RB




LTE B66_1.4 M_Band Edge_High_QPSK_FullRB



LTE B66_1.4 M_Extended Band Edge_High_QPSK_FullRB

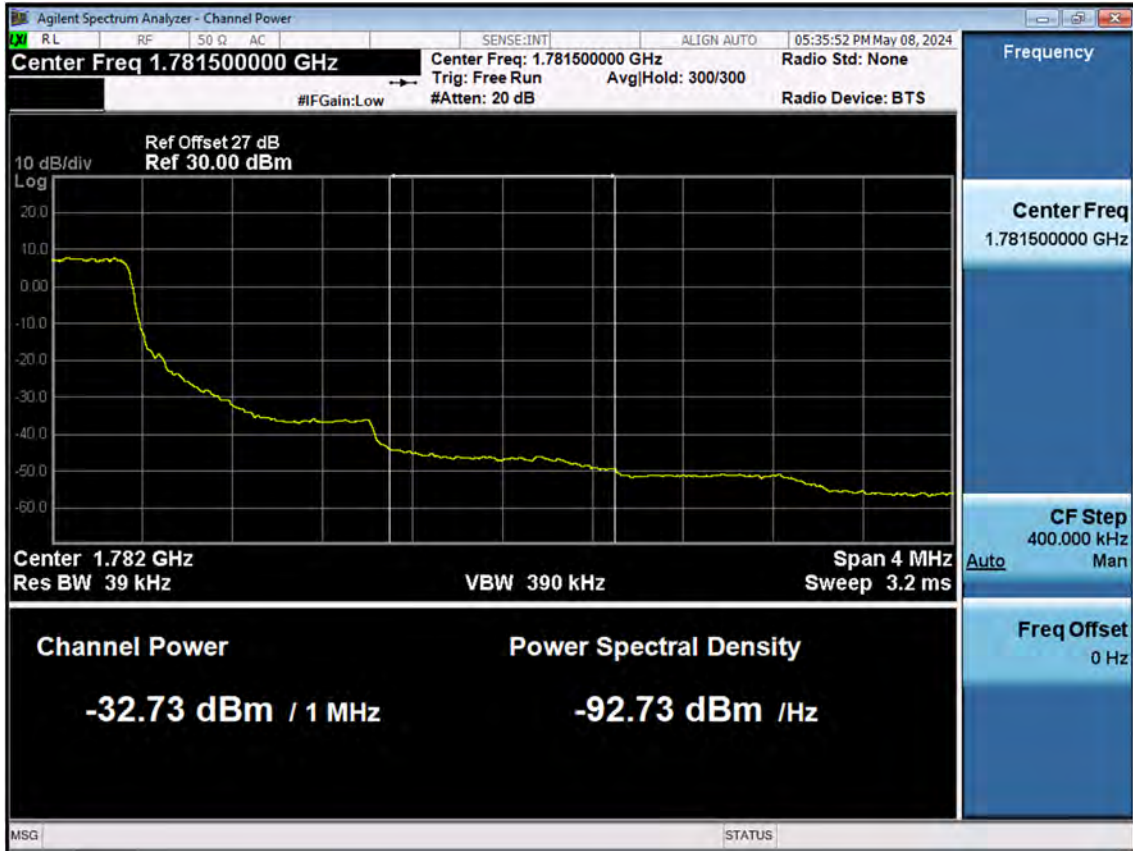

LTE B66_3 M_Band Edge_Low_QPSK_1RB

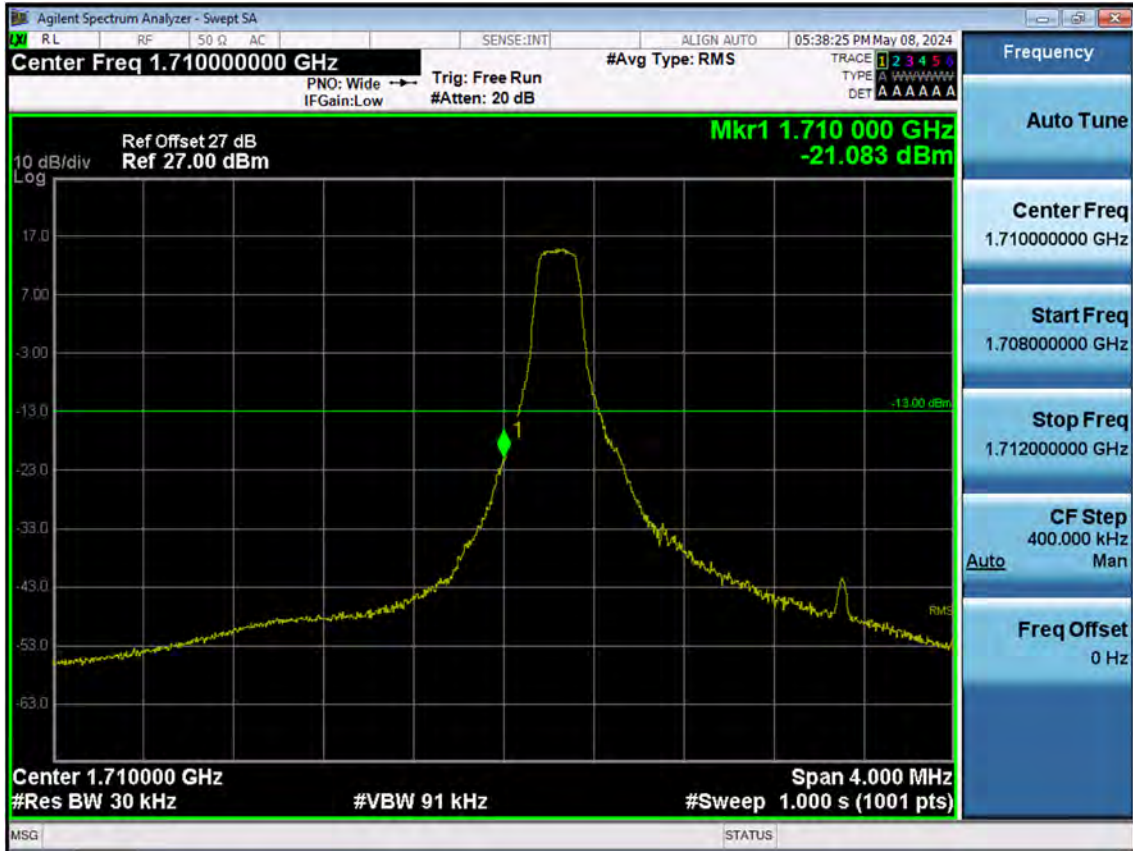


LTE B66_3 M_Band Edge_Low_QPSK_FullRB



LTE B66_3 M_Extended Band Edge_Low_QPSK_FullRB




LTE B66_3 M_Band Edge_High_QPSK_1RB

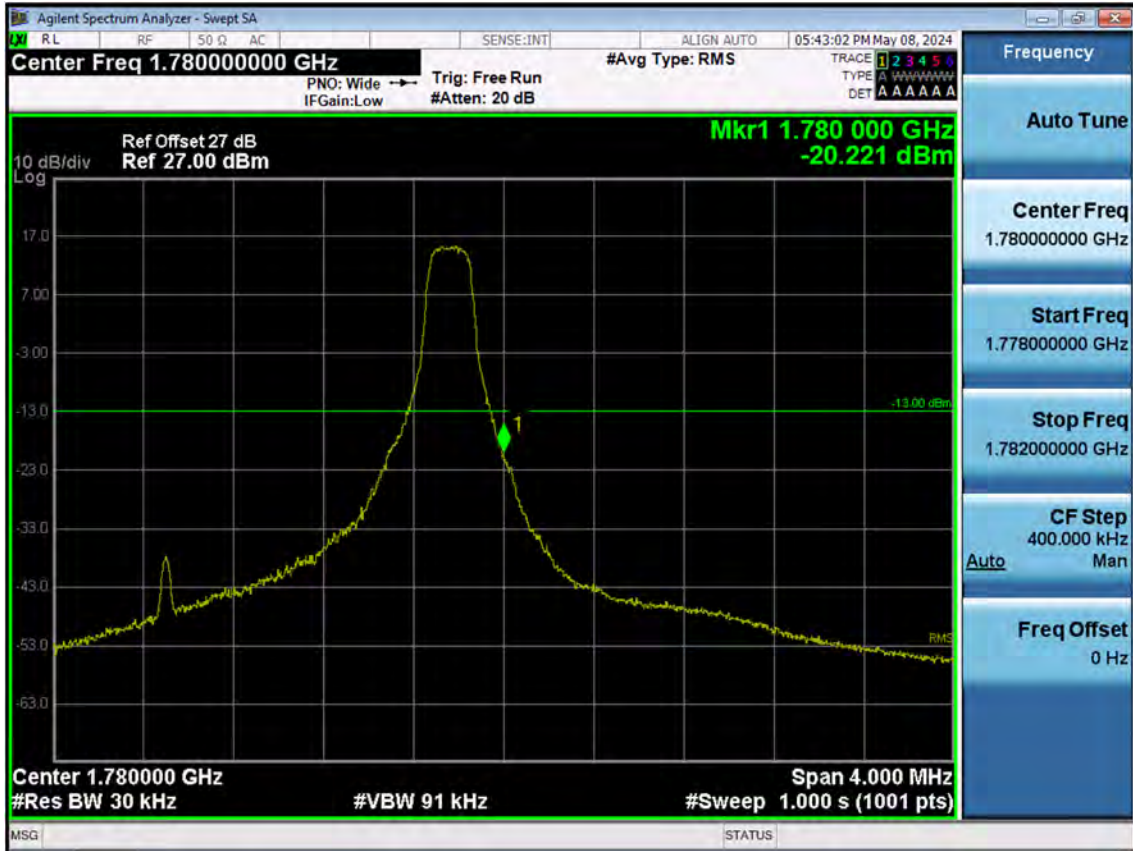


LTE B66_3 M_Band Edge_High_QPSK_FullRB



LTE B66_3 M_Extended Band Edge_High_QPSK_FullRB

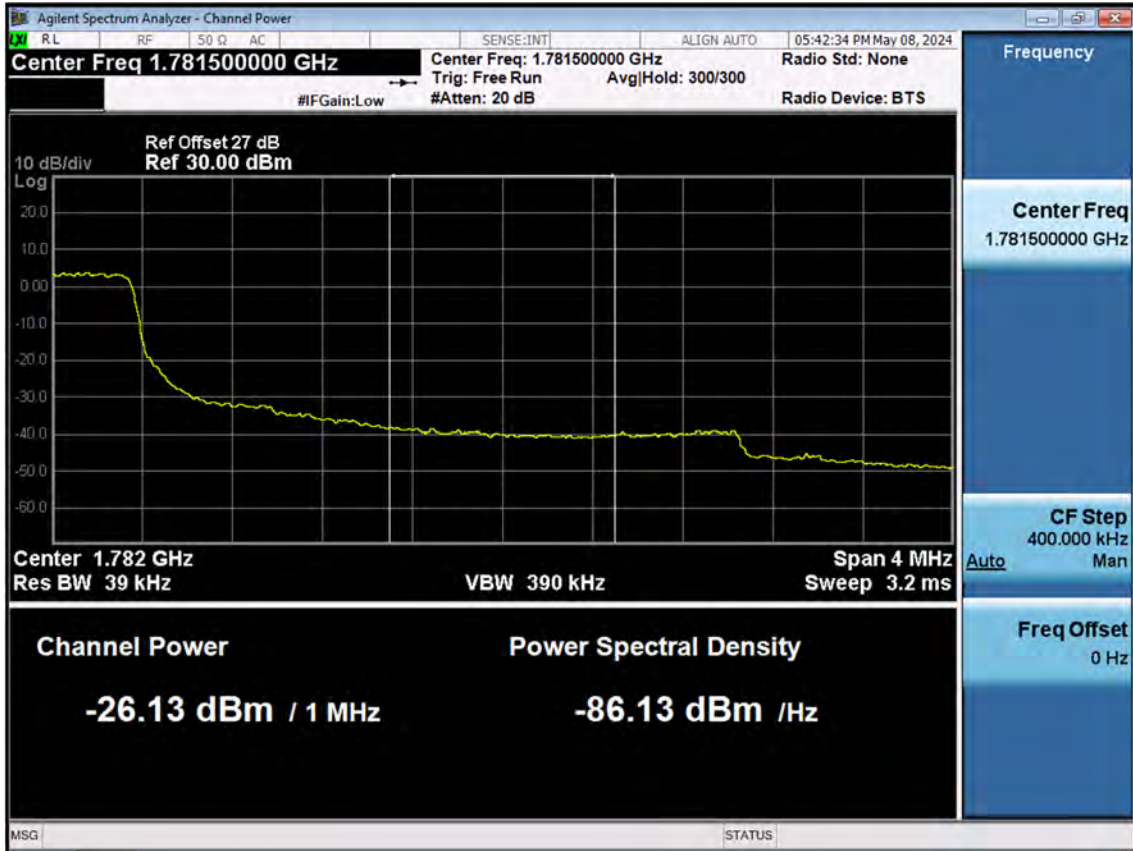


LTE B66_5 M_Band Edge_Low_QPSK_1RB

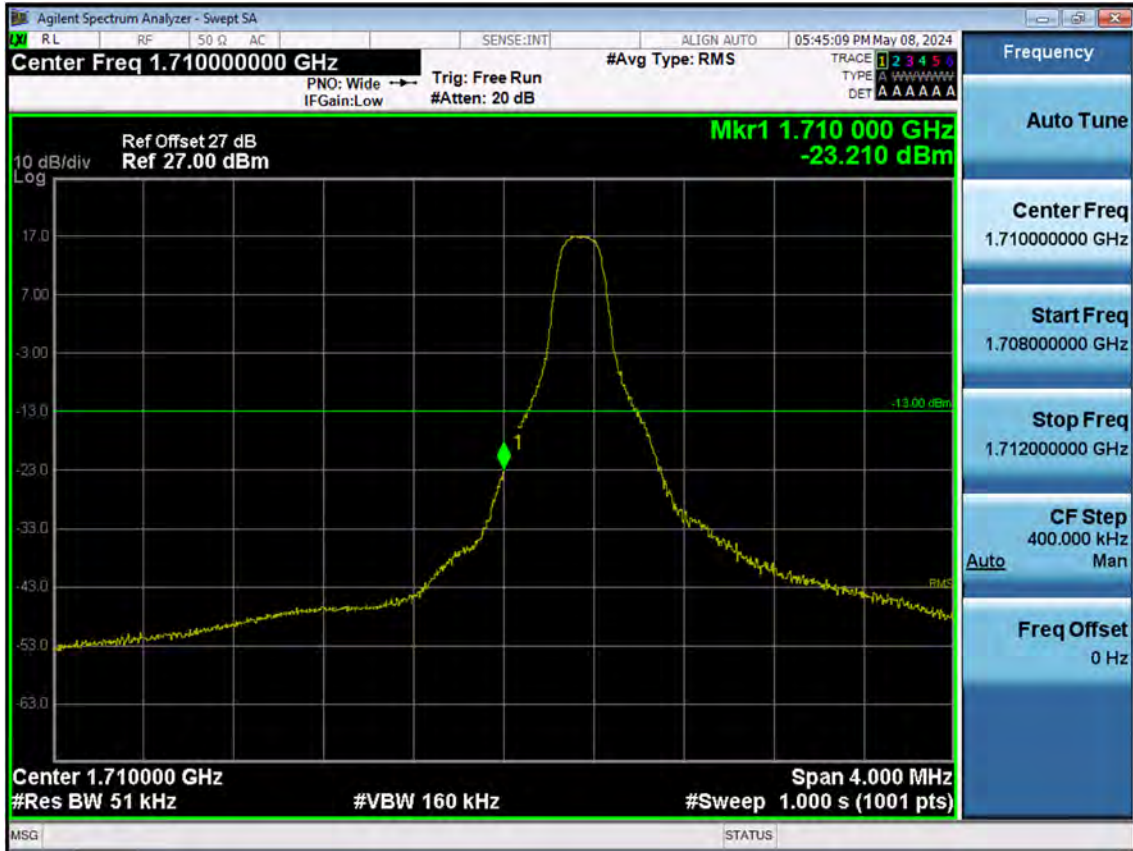


LTE B66_5 M_Band Edge_Low_QPSK_FullRB



LTE B66_5 M_Extended Band Edge_Low_QPSK_FullRB

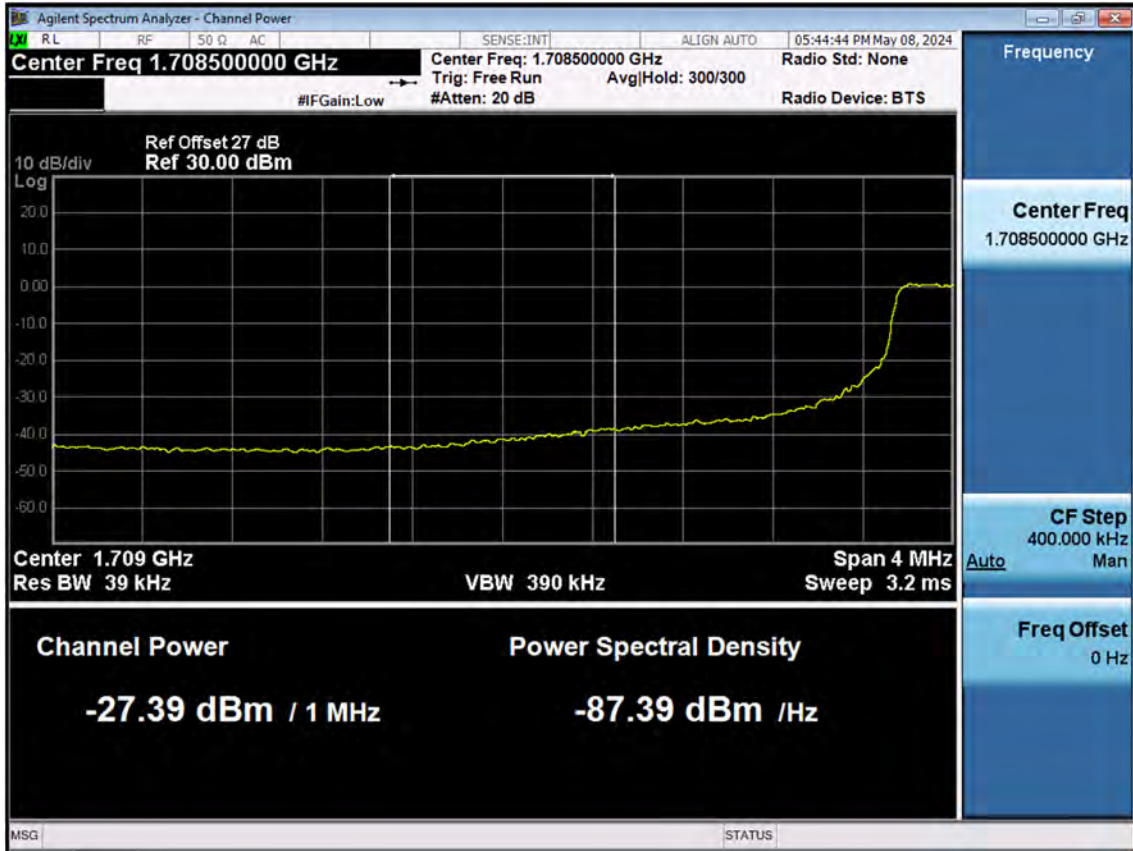


LTE B66_5 M_Band Edge_High_QPSK_1RB

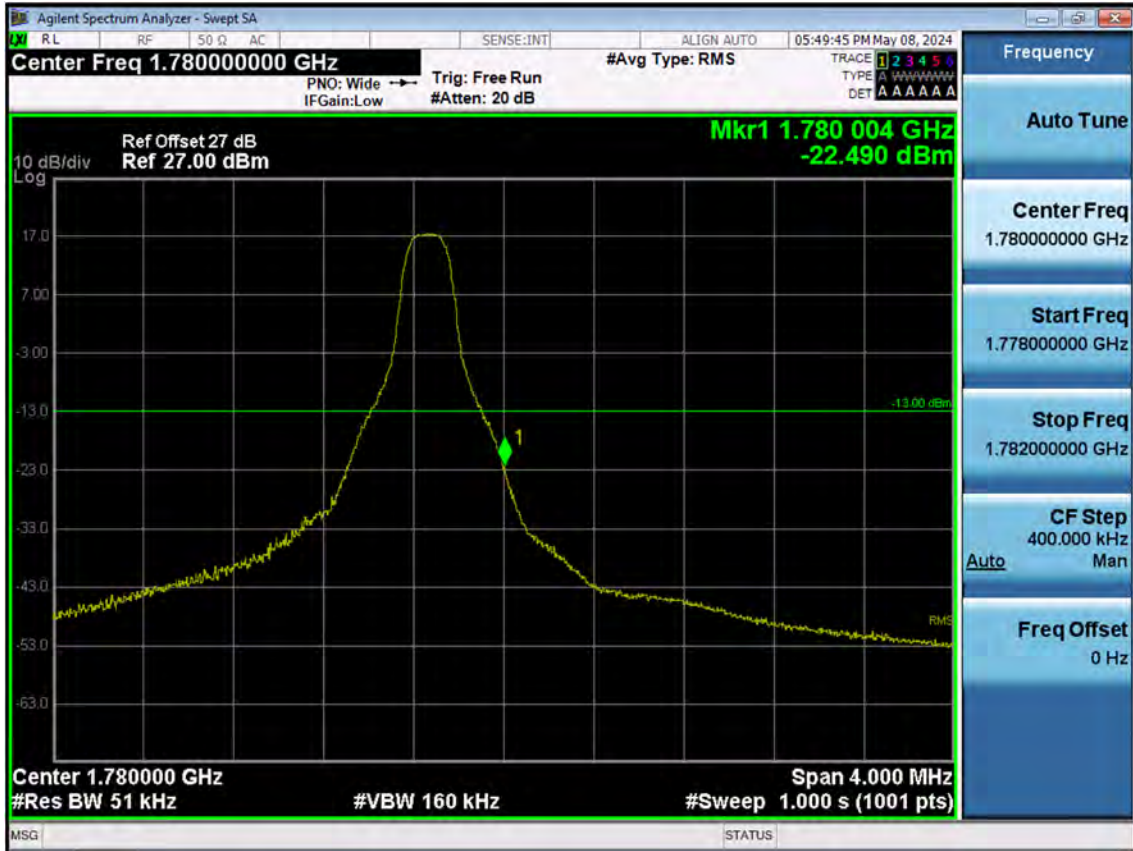

LTE B66_5 M_Band Edge_High_QPSK_FullRB




LTE B66_5 M_Extended Band Edge_High_QPSK_FullRB

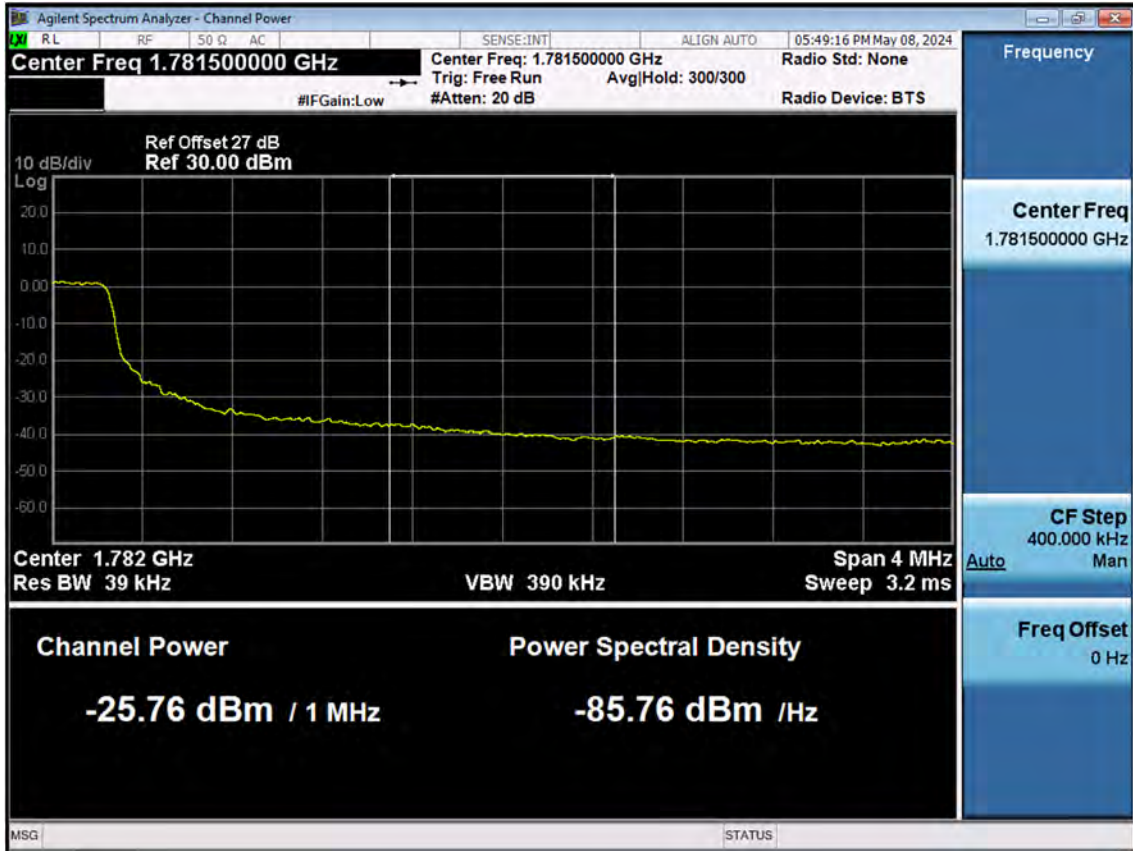


LTE B66_10 M_Band Edge_Low_QPSK_1RB



LTE B66_10 M_Band Edge_Low_QPSK_FullRB

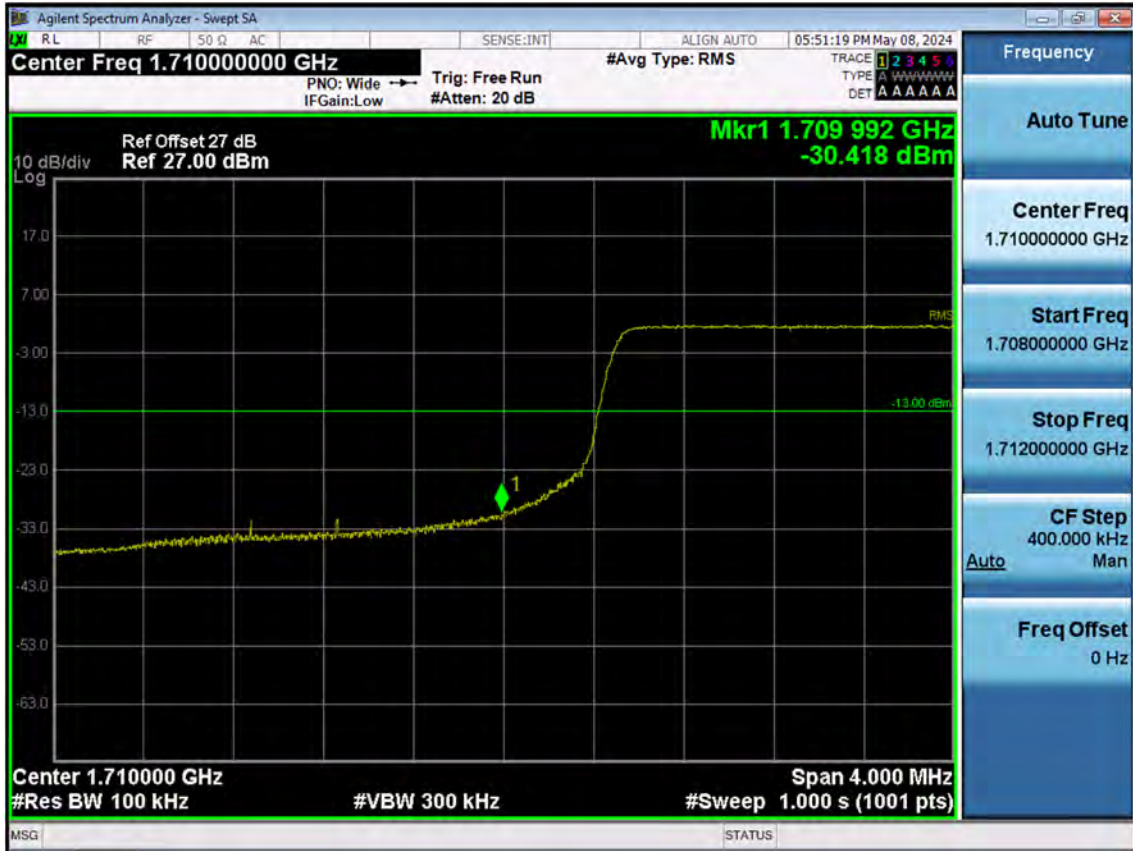

LTE B66_10 M_Extended Band Edge_Low_QPSK_FullRB

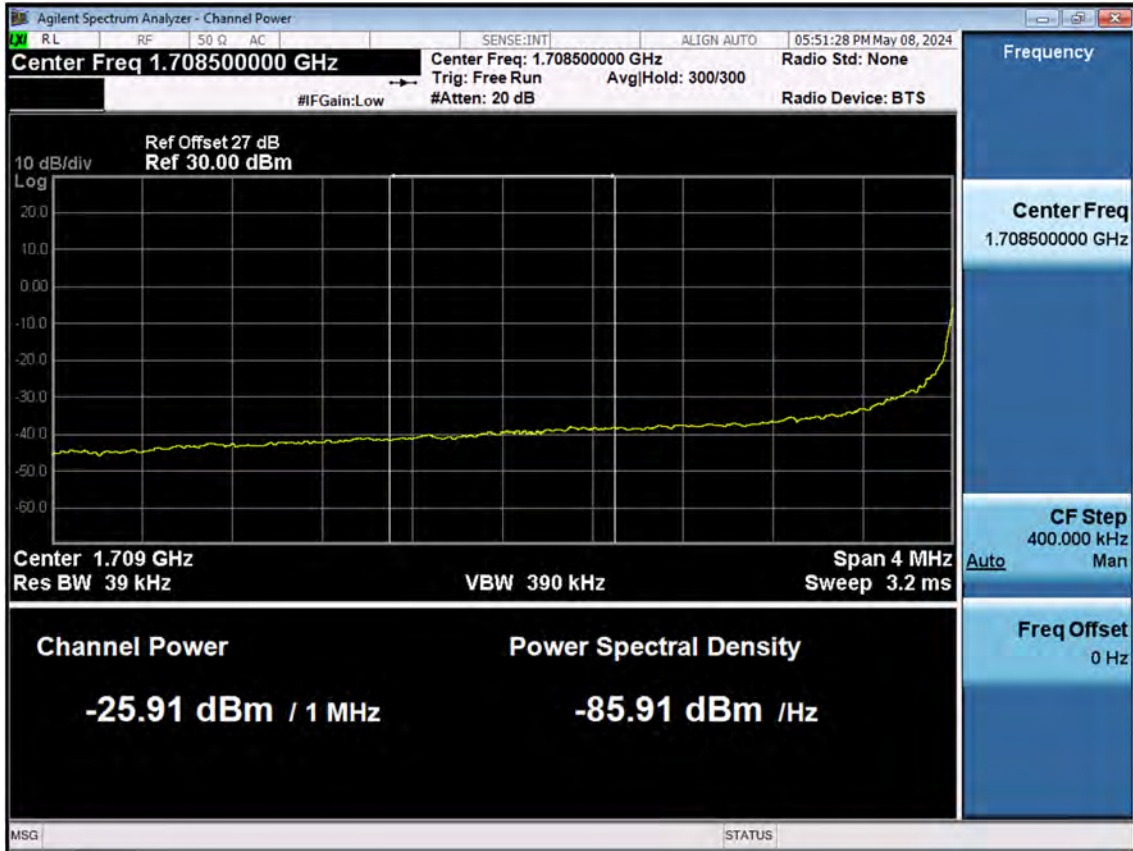


LTE B66_10 M_Band Edge_High_QPSK_1RB



LTE B66_10 M_Band Edge_High_QPSK_FullRB




LTE B66_10 M_Extended Band Edge_High_QPSK_FullRB

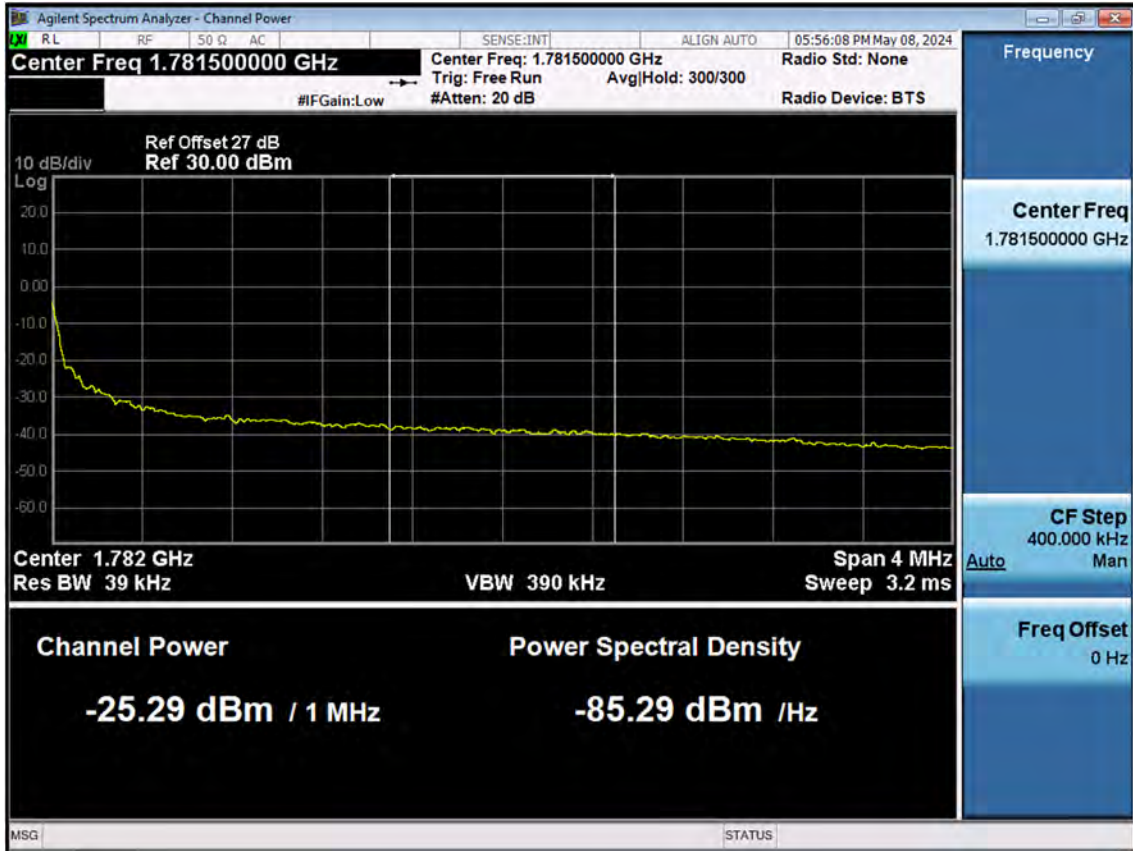


LTE B66_15 M_Band Edge_Low_QPSK_1RB



LTE B66_15 M_Band Edge_Low_QPSK_FullRB

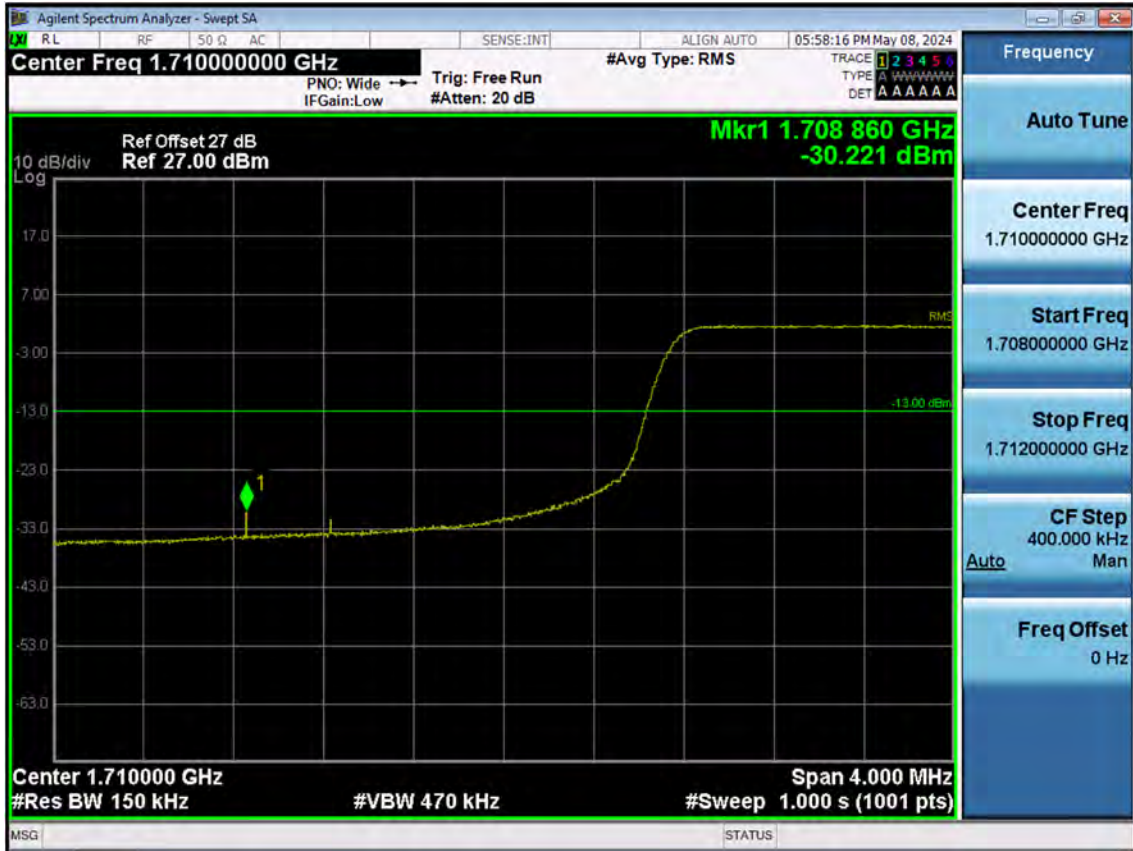

LTE B66_15 M_Extended Band Edge_Low_QPSK_FullRB

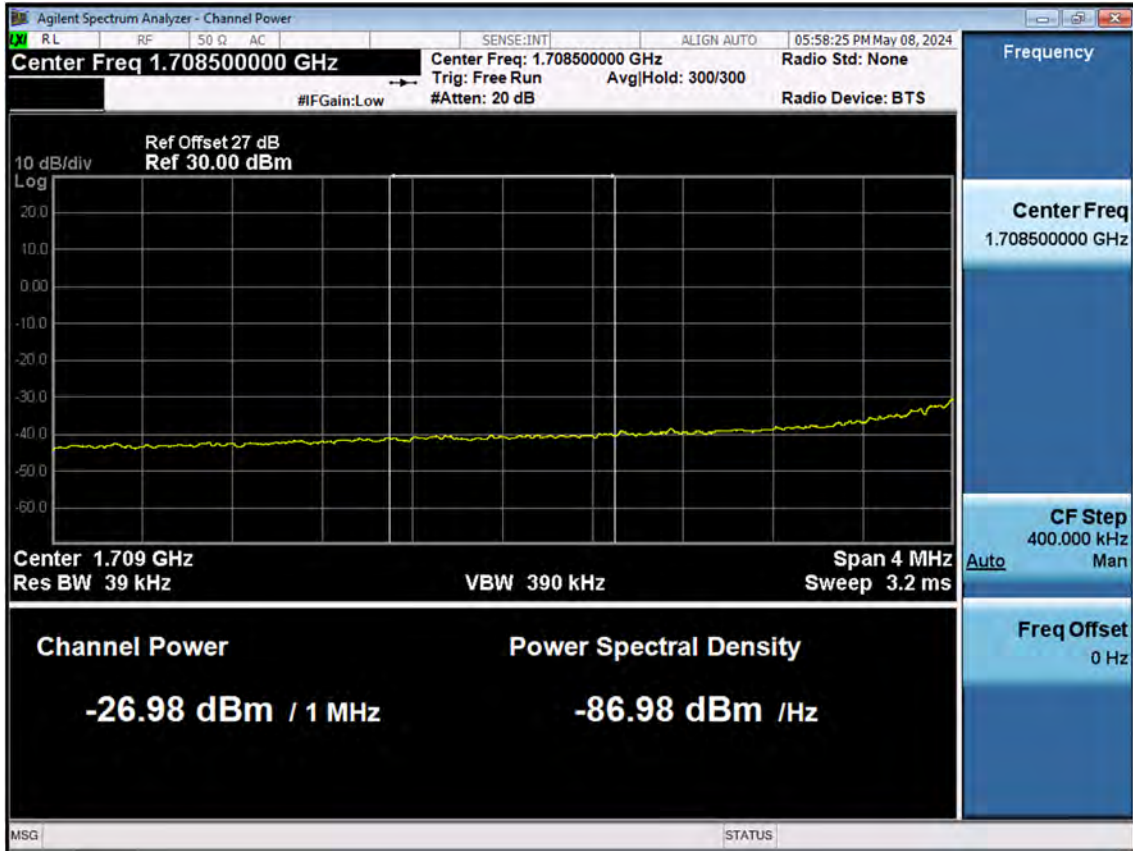

LTE B66_15 M_Band Edge_High_QPSK_1RB



LTE B66_15 M_Band Edge_High_QPSK_FullRB

