

# TEST REPORT

FCC ULCA 66B Test for SM-F741U  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2404-FC040

**DATE OF ISSUE**  
April 26, 2024

**Tested by**  
Jae Mun Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2404-FC040

**DATE OF ISSUE**  
April 26, 2024

**Additional Model**  
SM-F741U1

**Applicant** **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name** Mobile Phone  
**Model Name** SM-F741U

**Date of Test** February 22, 2024 ~ April 23, 2024

**FCC ID** A3LSMF741U

**Location of Test**  Permanent Testing Lab  On Site Testing  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** § 27

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 26, 2024	Initial Release

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S.C.853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	8
2.1. DESCRIPTION OF EUT .....	8
2.2. MEASURING INSTRUMENT CALIBRATION.....	8
2.3. TEST FACILITY .....	8
3. DESCRIPTION OF TESTS.....	9
3.1 TEST PROCEDURE.....	9
3.2 RADIATED POWER .....	10
3.3 RADIATED SPURIOUS EMISSIONS .....	11
3.4 PEAK- TO- AVERAGE RATIO.....	12
3.5 OCCUPIED BANDWIDTH. ....	14
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	15
3.7 BAND EDGE .....	16
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	18
4. LIST OF TEST EQUIPMENT .....	19
5. MEASUREMENT UNCERTAINTY .....	20
6. SUMMARY OF TEST RESULTS.....	21
7. SAMPLE CALCULATION .....	22
8. TEST DATA(Main 1 Ant) .....	24
8.1 Conducted Power .....	27
8.2 Equivalent Isotropic Radiated Power .....	30
8.3 Conducted Spurious Emissions .....	33
8.4 Channel Edge.....	58
8.5 Frequency Stability / Variation Of Ambient Temperature.....	74
8.6 Radiated Spurious Emissions .....	80
8.7 Occupied Bandwidth .....	83
8.8 Peak- to- Average Ratio.....	89
9. TEST DATA(Sub 5 Ant) .....	95
9.1 Conducted Power .....	98
9.2 Equivalent Isotropic Radiated Power .....	101
9.3 Conducted Spurious Emissions .....	104
9.4 Channel Edge.....	127
9.5 Frequency Stability / Variation Of Ambient Temperature.....	143
9.6 Radiated Spurious Emissions .....	149
9.7 Occupied Bandwidth .....	152
9.8 Peak- to- Average Ratio.....	158
10. ANNEX A_ TEST SETUP PHOTO .....	164

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741U
<b>Additional Model(s)</b>	SM-F741U1
<b>Tx Frequency:</b>	1712.5 - 1777.5: 5 MHz+5 MHz 1712.8 - 1775.0: 5 MHz+10 MHz 1715.0 - 1777.2: 10 MHz+5 MHz 1713.0 - 1772.5: 5 MHz+15 MHz 1717.5 - 1777.0: 15 MHz+5 MHz 1715.0 - 1775.0: 10 MHz+10 MHz
<b>Date(s) of Tests:</b>	February 22, 2024 ~ April 23, 2024
<b>Serial number:</b>	Radiated : R3CX20KJT0F Conducted : 7b5599bdac507ece
<b>LTE CA :</b>	CA 66B (Uplink)

### 1.1. MAXIMUM OUTPUT POWER

#### Main 1 Ant

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+5 MHz	1712.5 - 1777.5	QPSK	9M25G7D	22.82	0.191
		16QAM	9M23W7D	22.26	0.168
		64QAM	9M27W7D	21.09	0.129
		256QAM	9M27W7D	18.38	0.069
5 MHz+10 MHz	1712.8 - 1775.0	QPSK	13M9G7D	22.97	0.198
		16QAM	13M9W7D	22.46	0.176
		64QAM	13M9W7D	21.28	0.134
		256QAM	13M9W7D	18.49	0.071
10 MHz+5 MHz	1715.0 - 1777.2	QPSK	13M9G7D	22.84	0.192
		16QAM	14M0W7D	22.35	0.172
		64QAM	14M0W7D	21.37	0.137
		256QAM	13M9W7D	18.33	0.068
5 MHz+15 MHz	1713.0 - 1772.5	QPSK	18M2G7D	23.13	0.206
		16QAM	18M2W7D	22.64	0.184
		64QAM	18M1W7D	21.29	0.135
		256QAM	18M2W7D	18.59	0.072
15 MHz+5 MHz	1717.5 - 1777.0	QPSK	18M2G7D	22.64	0.184
		16QAM	18M3W7D	22.24	0.167
		64QAM	18M2W7D	21.19	0.132
		256QAM	18M3W7D	18.28	0.067
10 MHz+10 MHz	1715.0 - 1775.0	QPSK	18M8G7D	22.87	0.194
		16QAM	18M8W7D	22.41	0.174
		64QAM	18M8W7D	21.35	0.136
		256QAM	18M8W7D	18.37	0.069

## Sub 5 Ant

Mode (PCC+SCC)	Tx Frequency (MHz)	Modulation	Emission Designator	EIRP	
				Max. Power (dBm)	Max. Power (W)
5 MHz+5 MHz	1712.5 - 1777.5	QPSK	9M28G7D	22.02	0.159
		16QAM	9M23W7D	21.48	0.141
		64QAM	9M26W7D	20.45	0.111
		256QAM	9M26W7D	17.42	0.055
5 MHz+10 MHz	1712.8 - 1775.0	QPSK	13M8G7D	21.87	0.154
		16QAM	13M9W7D	21.35	0.136
		64QAM	13M8W7D	20.44	0.111
		256QAM	13M9W7D	17.31	0.054
10 MHz+5 MHz	1715.0 - 1777.2	QPSK	13M9G7D	21.98	0.158
		16QAM	13M9W7D	21.49	0.141
		64QAM	13M9W7D	20.50	0.112
		256QAM	13M9W7D	17.38	0.055
5 MHz+15 MHz	1713.0 - 1772.5	QPSK	18M3G7D	22.01	0.159
		16QAM	18M1W7D	21.50	0.141
		64QAM	18M1W7D	20.50	0.112
		256QAM	18M2W7D	17.47	0.056
15 MHz+5 MHz	1717.5 - 1777.0	QPSK	18M3G7D	21.89	0.155
		16QAM	18M3W7D	21.46	0.140
		64QAM	18M2W7D	20.49	0.112
		256QAM	18M2W7D	17.32	0.054
10 MHz+10 MHz	1715.0 - 1775.0	QPSK	18M8G7D	21.85	0.153
		16QAM	18M8W7D	21.38	0.137
		64QAM	18M8W7D	20.44	0.111
		256QAM	18M8W7D	17.27	0.053

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6, mmWave. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**



### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

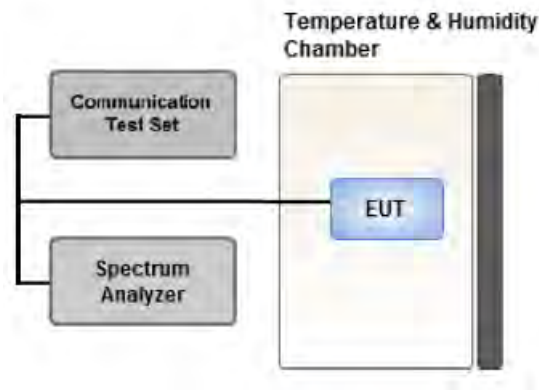

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to “free run.”
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

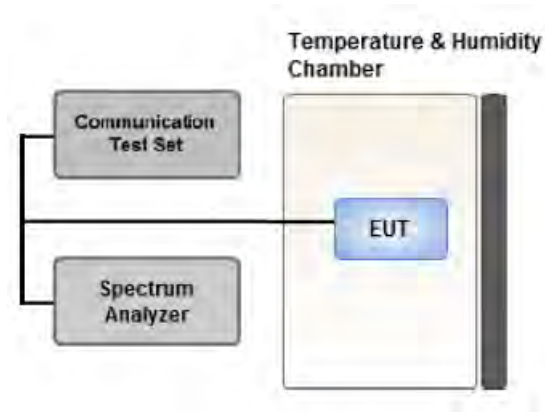

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

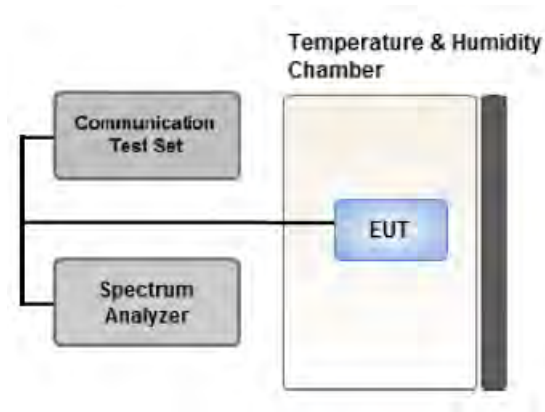

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 BAND EDGE

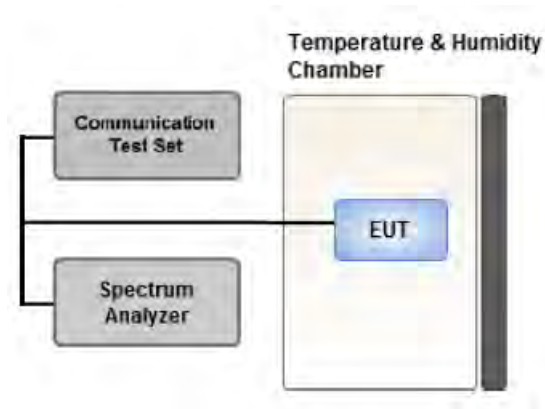

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize



### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

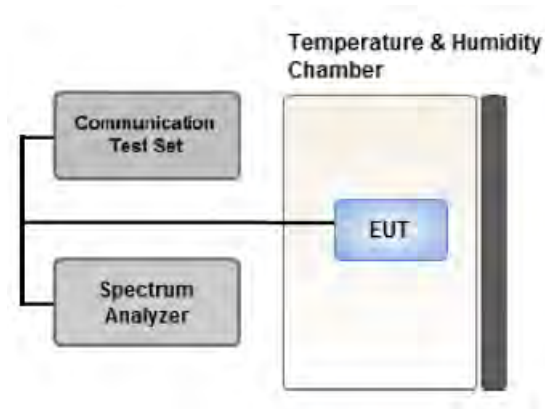

#### Test setup

##### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

##### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
RF Switching System	FBSR-02B(1.2G HPF+LNA)	T&M SYSTEM	F1L1	12/11/2024	Annual
RF Switching System	FBSR-02B(3.3G HPF+LNA)	T&M SYSTEM	F1L2	12/11/2024	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	5001	04/17/2025	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/23/2024	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	03/09/2025	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	03/09/2025	Biennial
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/17/2025	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/11/2025	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	04/19/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	08/17/2024	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/07/2026	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	895	09/16/2024	Biennial
Trilog Broadband Antenna	VULB9168	Schwarzbeck	1135	09/16/2024	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262094331	11/17/2024	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6201026545	12/11/2024	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	PASS
Peak- to- Average Ratio	§ 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA(Main 1 Ant)

### Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	5	10
5	10	15
10	5	15
5	15	20
15	5	20
10	10	20



3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)  
: We have selected higher of the Conduction Output Power.
  - Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
  - Worst case(OBW, PAR, Frequency stability)  
: All modes of operation were investigated and the worst case configuration results are reported.
4. All modes of operation were investigated and the worst case configuration results are reported.  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)  
Worst case : Stand alone
5. We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
6. All 3 channels(low/mid/high) of conducted power and radiated power were investigated and the worst case channel results are reported.
7. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
Worst case: half-open mode.

[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	10	1715.0	132022	1	49	10	1724.9	132121	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1763.2	132504	1	24	15	1772.5	132597	1	0
		Low	10	1715.0	132022	1	0	10	1724.9	132121	1	49
		Mid	5	1748.1	132353	1	0	15	1757.4	132446	1	74
		High	5	1763.2	132504	1	0	15	1772.5	132597	1	74
		Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0
		Mid	5	1748.1	132353	25	0	15	1757.4	132446	75	0
		High	5	1763.2	132504	25	0	15	1772.5	132597	75	0
		Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0
		Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0
		High	10	1765.1	132523	50	0	10	1775.0	132622	50	0
Radiated Spurious Emissions	QPSK	Low	5	1713.0	132002	1	24	15	1722.3	132095	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1763.2	132504	1	24	15	1772.5	132597	1	0

[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0
			5	1750.3	132375	25	0	10	1757.5	132447	50	0
			10	1752.5	132397	50	0	5	1759.7	132469	25	0
			5	1748.1	132353	25	0	15	1757.4	132446	75	0
			15	1752.6	132398	75	0	5	1761.9	132491	25	0
			10	1750.1	132373	50	0	10	1760.0	132472	50	0
Frequency stability	QPSK	Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0
			10	1715.0	132022	50	0	5	1722.2	132094	25	0
			15	1717.5	132047	75	0	5	1726.8	132140	25	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
			10	1770.0	132572	50	0	5	1777.2	132644	25	0
			15	1767.7	132549	75	0	5	1777.0	132642	25	0

## 8.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	23.53
	5	1712.8	132000	1	24	10	1720.0	132072	1	0	23.57
	10	1715.0	132022	1	49	5	1722.2	132094	1	0	23.45
	5	1713.0	132002	1	24	15	1722.3	132095	1	0	23.44
	15	1717.5	132047	1	74	5	1726.8	132140	1	0	23.45
	<b>10</b>	<b>1715.0</b>	<b>132022</b>	<b>1</b>	<b>49</b>	<b>10</b>	<b>1724.9</b>	<b>132121</b>	<b>1</b>	<b>0</b>	<b>23.63</b>
Mid	5	1752.6	132398	1	24	5	1757.4	132446	1	0	23.68
	5	1750.3	132375	1	24	10	1757.5	132447	1	0	23.76
	10	1752.5	132397	1	49	5	1759.7	132469	1	0	23.56
	<b>5</b>	<b>1748.1</b>	<b>132353</b>	<b>1</b>	<b>24</b>	<b>15</b>	<b>1757.4</b>	<b>132446</b>	<b>1</b>	<b>0</b>	<b>23.78</b>
	15	1752.6	132398	1	74	5	1761.9	132491	1	0	23.55
	10	1750.1	132373	1	49	10	1760.0	132472	1	0	23.70
High	5	1772.7	132599	1	24	5	1777.5	132647	1	0	23.64
	5	1767.8	132550	1	24	10	1775.0	132622	1	0	23.65
	10	1770.0	132572	1	49	5	1777.2	132644	1	0	23.58
	<b>5</b>	<b>1763.2</b>	<b>132504</b>	<b>1</b>	<b>24</b>	<b>15</b>	<b>1772.5</b>	<b>132597</b>	<b>1</b>	<b>0</b>	<b>23.75</b>
	15	1767.7	132549	1	74	5	1777.0	132642	1	0	23.60
	10	1765.1	132523	1	49	10	1775.0	132622	1	0	23.60

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0	21.63
	5	1712.8	132000	25	0	10	1720.0	132072	50	0	21.67
	10	1715.0	132022	50	0	5	1722.2	132094	25	0	21.63
	5	1713.0	132002	25	0	15	1722.3	132095	75	0	21.65
	<b>15</b>	<b>1717.5</b>	<b>132047</b>	<b>75</b>	<b>0</b>	<b>5</b>	<b>1726.8</b>	<b>132140</b>	<b>25</b>	<b>0</b>	<b>21.69</b>
	10	1715.0	132022	50	0	10	1724.9	132121	50	0	21.61
Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0	21.84
	5	1750.3	132375	25	0	10	1757.5	132447	50	0	21.88
	10	1752.5	132397	50	0	5	1759.7	132469	25	0	21.80
	<b>5</b>	<b>1748.1</b>	<b>132353</b>	<b>25</b>	<b>0</b>	<b>15</b>	<b>1757.4</b>	<b>132446</b>	<b>75</b>	<b>0</b>	<b>21.89</b>
	15	1752.6	132398	75	0	5	1761.9	132491	25	0	21.82
	10	1750.1	132373	50	0	10	1760.0	132472	50	0	21.85
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	21.79
	5	1767.8	132550	25	0	10	1775.0	132622	50	0	21.85
	10	1770.0	132572	50	0	5	1777.2	132644	25	0	21.77
	<b>5</b>	<b>1763.2</b>	<b>132504</b>	<b>25</b>	<b>0</b>	<b>15</b>	<b>1772.5</b>	<b>132597</b>	<b>75</b>	<b>0</b>	<b>21.90</b>
	15	1767.7	132549	75	0	5	1777.0	132642	25	0	21.87
	10	1765.1	132523	50	0	10	1775.0	132622	50	0	21.83

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	1715.0	132022	1	49	10	1724.9	132121	1	0	22.58
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	22.78
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	22.77
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	20.77
Mid	5	1748.1	132353	25	0	15	1757.4	132446	75	0	21.00
High	5	1763.2	132504	25	0	15	1772.5	132597	75	0	20.93

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	1715.0	132022	1	49	10	1724.9	132121	1	0	21.61
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	21.51
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	21.73
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	20.44
Mid	5	1748.1	132353	25	0	15	1757.4	132446	75	0	20.70
High	5	1763.2	132504	25	0	15	1772.5	132597	75	0	20.78

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	10	1715.0	132022	1	49	10	1724.9	132121	1	0	18.73
Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0	18.75
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	18.78
Low	15	1717.5	132047	75	0	5	1726.8	132140	25	0	18.77
Mid	5	1748.1	132353	25	0	15	1757.4	132446	75	0	18.75
High	5	1763.2	132504	25	0	15	1772.5	132597	75	0	18.75

Note:

Modulation : 256QAM

## 8.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	131997	1/24	5	132045	1/0	-19.18	14.44	9.98	2.23	V	0.165	22.18
	5	132000	1/24	10	132072	1/0	-19.20	14.42	9.98	2.23	V	0.165	22.16
	10	132022	1/49	5	132094	1/0	-19.14	14.37	10.01	2.22	V	0.164	22.16
	<b>5</b>	<b>132002</b>	<b>1/24</b>	<b>15</b>	<b>132095</b>	<b>1/0</b>	<b>-19.10</b>	<b>14.41</b>	<b>10.01</b>	<b>2.22</b>	<b>V</b>	<b>0.166</b>	<b>22.20</b>
	15	132047	1/74	5	132140	1/0	-19.17	14.34	10.01	2.22	V	0.163	22.13
	10	132022	1/49	10	132121	1/0	-19.19	14.32	10.01	2.22	V	0.163	22.11
Mid	5	132398	1/24	5	132446	1/0	-18.87	14.81	10.18	2.17	V	0.191	22.82
	5	132375	1/24	10	132447	1/0	-18.72	14.96	10.18	2.17	V	0.198	22.97
	10	132397	1/49	5	132469	1/0	-18.85	14.83	10.18	2.17	V	0.192	22.84
	<b>5</b>	<b>132353</b>	<b>1/24</b>	<b>15</b>	<b>132446</b>	<b>1/0</b>	<b>-18.60</b>	<b>15.11</b>	<b>10.17</b>	<b>2.15</b>	<b>V</b>	<b>0.206</b>	<b>23.13</b>
	15	132398	1/74	5	132491	1/0	-19.02	14.63	10.19	2.18	V	0.184	22.64
	10	132373	1/49	10	132472	1/0	-18.82	14.86	10.18	2.17	V	0.194	22.87
High	5	132599	1/24	5	132647	1/0	-19.58	14.07	10.21	2.25	V	0.159	22.03
	5	132550	1/24	10	132622	1/0	-19.47	14.14	10.20	2.23	V	0.162	22.11
	10	132572	1/49	5	132644	1/0	-19.58	14.07	10.21	2.25	V	0.159	22.03
	<b>5</b>	<b>132504</b>	<b>1/24</b>	<b>15</b>	<b>132597</b>	<b>1/0</b>	<b>-19.14</b>	<b>14.47</b>	<b>10.20</b>	<b>2.23</b>	<b>V</b>	<b>0.175</b>	<b>22.44</b>
	15	132549	1/74	5	132642	1/0	-19.53	14.08	10.20	2.23	V	0.160	22.05
	10	132523	1/49	10	132622	1/0	-19.43	14.18	10.20	2.23	V	0.164	22.15

Note:

1. Modulation : QPSK
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132002	1/24	15	132095	1/0	-19.65	13.86	10.01	2.22	V	0.146	21.65
5	132398	1/24	5	132446	1/0	-19.43	14.25	10.18	2.17	V	0.168	22.26
5	132375	1/24	10	132447	1/0	-19.23	14.45	10.18	2.17	V	0.176	22.46
10	132397	1/49	5	132469	1/0	-19.34	14.34	10.18	2.17	V	0.172	22.35
5	132353	1/24	15	132446	1/0	-19.09	14.62	10.17	2.15	V	0.184	22.64
15	132398	1/74	5	132491	1/0	-19.42	14.23	10.19	2.18	V	0.167	22.24
10	132373	1/49	10	132472	1/0	-19.28	14.40	10.18	2.17	V	0.174	22.41
5	132504	1/24	15	132597	1/0	-19.63	13.98	10.20	2.23	V	0.157	21.95

Note:

1. Modulation : 16QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132002	1/24	15	132095	1/0	-21.08	12.43	10.01	2.22	V	0.105	20.22
5	132398	1/24	5	132446	1/0	-20.60	13.08	10.18	2.17	V	0.129	21.09
5	132375	1/24	10	132447	1/0	-20.41	13.27	10.18	2.17	V	0.134	21.28
10	132397	1/49	5	132469	1/0	-20.32	13.36	10.18	2.17	V	0.137	21.37
5	132353	1/24	15	132446	1/0	-20.44	13.27	10.17	2.15	V	0.134	21.29
15	132398	1/74	5	132491	1/0	-20.47	13.18	10.19	2.18	V	0.132	21.19
10	132373	1/49	10	132472	1/0	-20.34	13.34	10.18	2.17	V	0.136	21.35
5	132504	1/24	15	132597	1/0	-21.04	12.57	10.20	2.23	V	0.113	20.54

Note:

1. Modulation : 64QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
5	132002	1/24	15	132095	1/0	-23.62	9.89	10.01	2.22	V	0.059	17.68
5	132398	1/24	5	132446	1/0	-23.31	10.37	10.18	2.17	V	0.069	18.38
5	132375	1/24	10	132447	1/0	-23.20	10.48	10.18	2.17	V	0.071	18.49
10	132397	1/49	5	132469	1/0	-23.36	10.32	10.18	2.17	V	0.068	18.33
5	132353	1/24	15	132446	1/0	-23.14	10.57	10.17	2.15	V	0.072	18.59
15	132398	1/74	5	132491	1/0	-23.38	10.27	10.19	2.18	V	0.067	18.28
10	132373	1/49	10	132472	1/0	-23.32	10.36	10.18	2.17	V	0.069	18.37
5	132504	1/24	15	132597	1/0	-23.65	9.96	10.20	2.23	V	0.062	17.93

Note:

1. Modulation : 256QAM
2. Limit : < 1 Watts



### 8.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	10	132022	1715.0	1/49	10	132121	1724.9	1/0	9.9686	28.591	-75.11	-46.52
Mid	5	132353	1748.1	1/24	15	132446	1757.4	1/0	8.3136	28.591	-74.63	-46.03
High	5	132504	1763.2	1/24	15	132597	1772.5	1/0	9.1341	28.591	-75.82	-47.23
Low	10	132022	1715.0	1/0	10	132121	1724.9	1/49	3.8151	27.976	-75.43	-47.46
Mid	5	132353	1748.1	1/0	15	132446	1757.4	1/74	4.0330	27.976	-75.55	-47.57
High	5	132504	1763.2	1/0	15	132597	1772.5	1/74	4.6496	27.976	-75.45	-47.47
Low	15	132047	1717.5	75/0	5	132140	1726.8	25/0	8.2877	28.591	-75.35	-46.76
Mid	5	132353	1748.1	25/0	15	132446	1757.4	75/0	7.9975	28.591	-76.10	-47.51
High	5	132504	1763.2	25/0	15	132597	1772.5	75/0	9.6859	28.591	-75.94	-47.35
Low	10	132022	1715.0	50/0	10	132121	1724.9	50/0	9.4576	28.591	-75.10	-46.51
Mid	10	132373	1750.1	50/0	10	132472	1760.0	50/0	8.0284	28.591	-75.60	-47.01
High	10	132523	1765.1	50/0	10	132622	1775.0	50/0	7.4442	28.591	-76.13	-47.54

Note:

1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

4. Limit : -13.0 dBm

Frequency Range : 30 MHz ~ 10 GHz

PCC 10 MHz Ch132022 RB1 Offset49 SCC 10 MHz Ch132121 RB1 Offset0



PCC 5 MHz Ch132353 RB1 Offset24 SCC 15 MHz Ch132446 RB1 Offset0



PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0



PCC 10 MHz Ch132022 RB1 Offset0 SCC 10 MHz Ch132121 RB1 Offset49




PCC 5 MHz Ch132353 RB1 Offset0 SCC 15 MHz Ch132446 RB1 Offset74



PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74




PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0

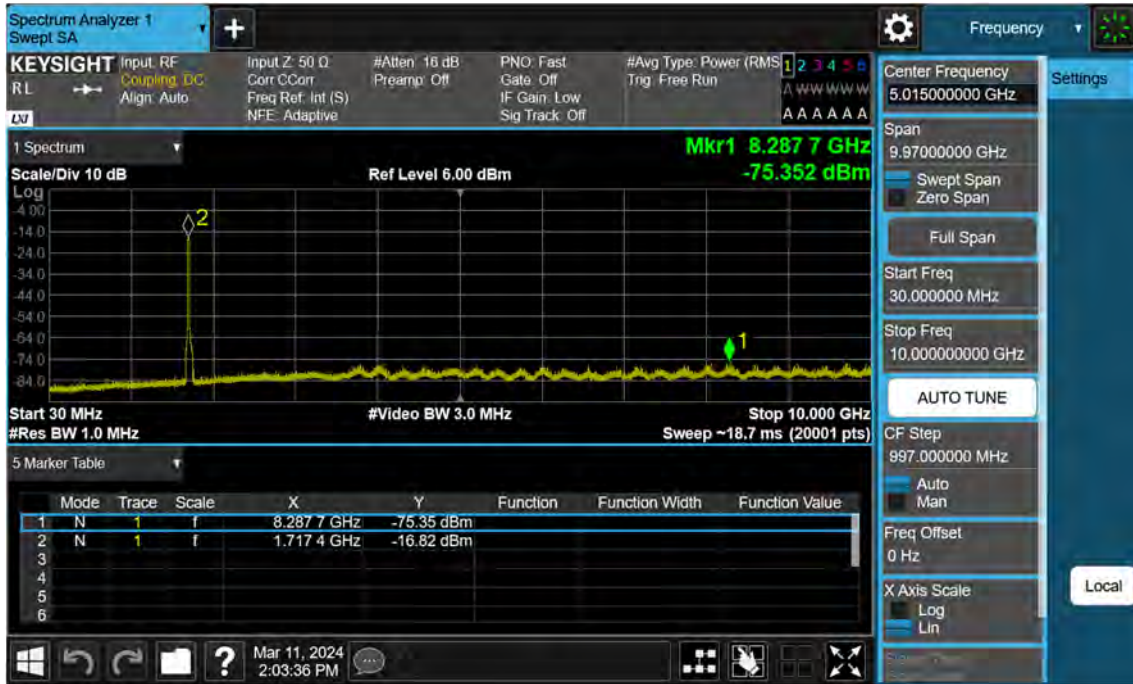




PCC 5 MHz Ch132353 RB25 Offset0 SCC 15 MHz Ch132446 RB75 Offset0

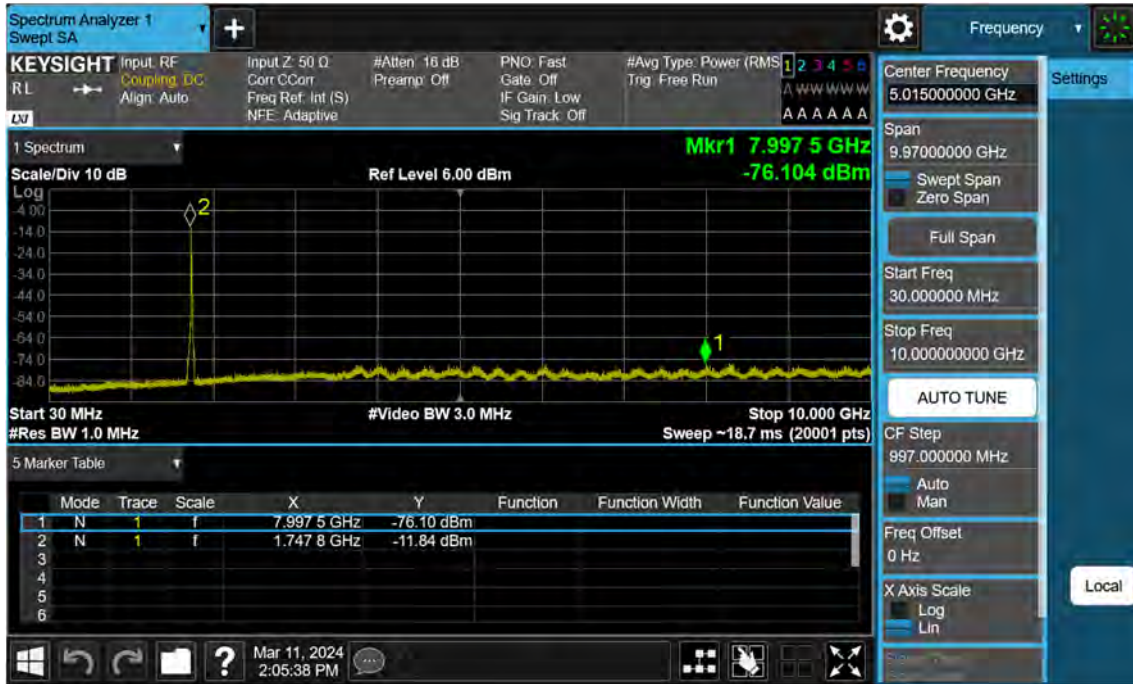

PCC 5 MHz Ch132504 RB25 Offset0 SCC 15 MHz Ch132597 RB75 Offset0




PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0

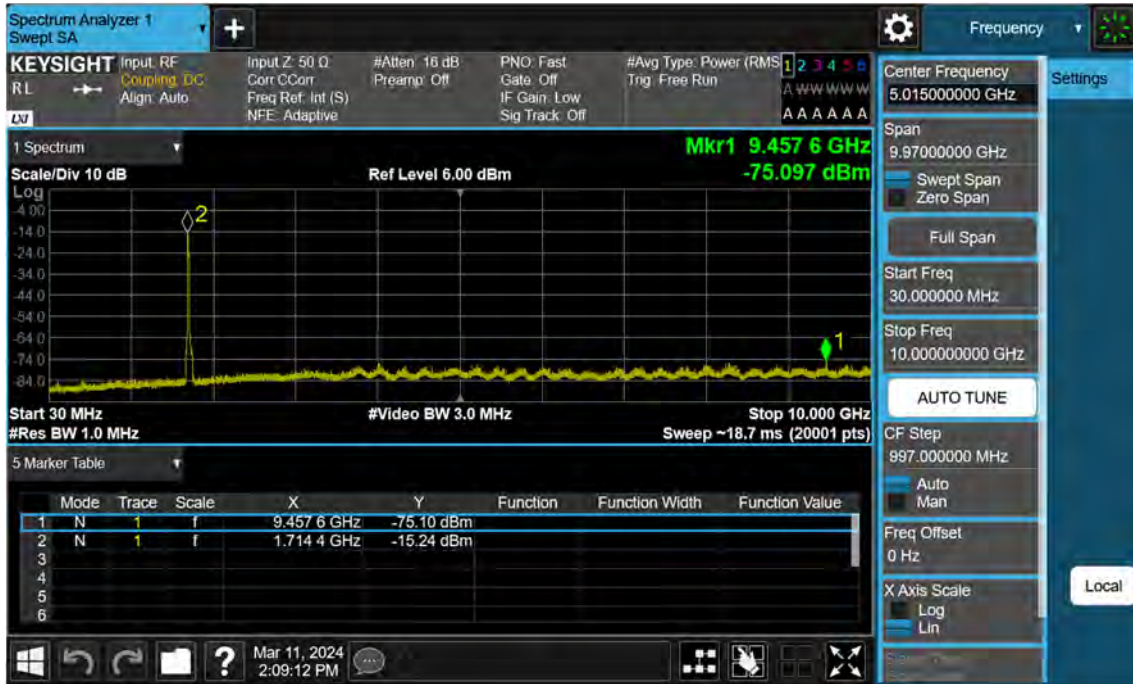

PCC 10 MHz Ch132373 RB50 Offset0 SCC 10 MHz Ch132472 RB50 Offset0



PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0

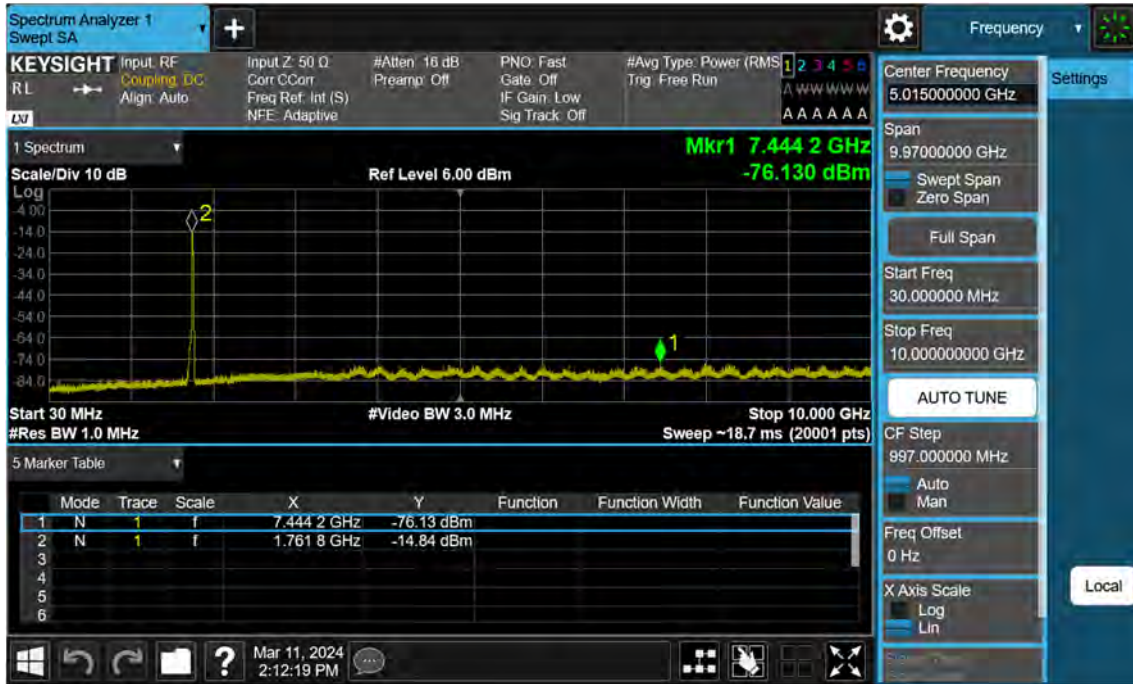

Frequency Range : 10 GHz ~ 20 GHz

PCC 10 MHz Ch132022 RB1 Offset49, SCC 10 MHz Ch132121 RB1 Offset0



PCC 5 MHz Ch132353 RB1 Offset24, SCC 15 MHz Ch132446 RB1 Offset0



PCC 5 MHz Ch132504 RB1 Offset24, SCC 15 MHz Ch132597 RB1 Offset0







PCC 10 MHz Ch132022 RB1 Offset0, SCC 10 MHz Ch132121 RB1 Offset49




PCC 5 MHz Ch132353 RB1 Offset0, SCC 15 MHz Ch132446 RB1 Offset74

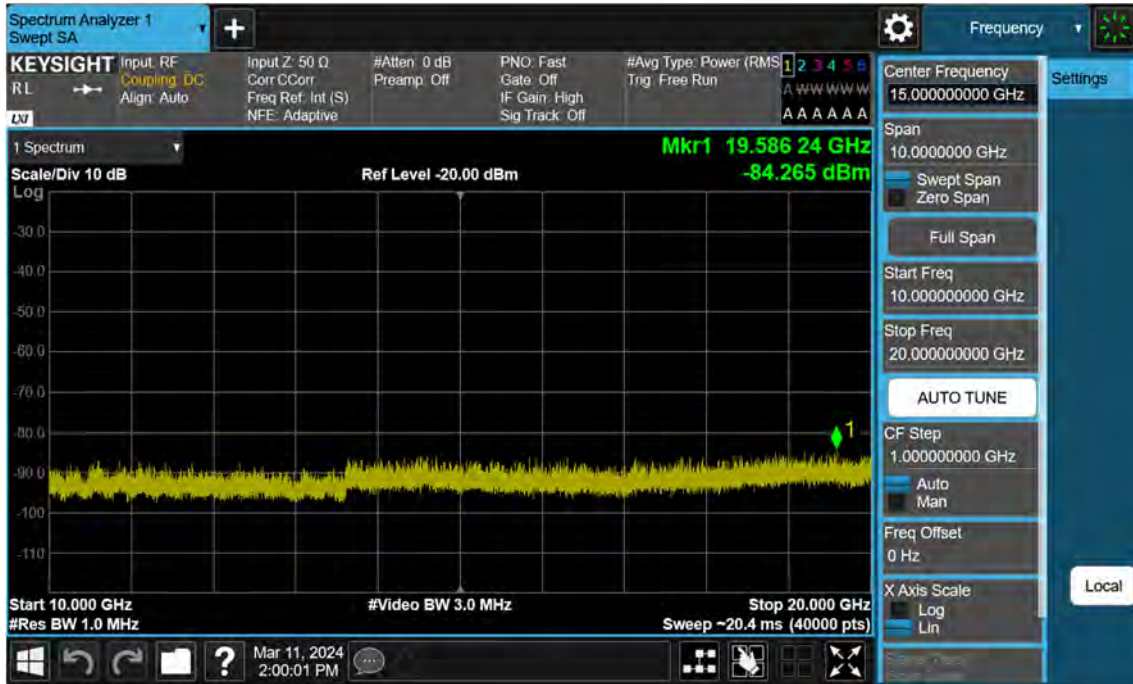


PCC 5 MHz Ch132504 RB1 Offset0, SCC 15 MHz Ch132597 RB1 Offset74

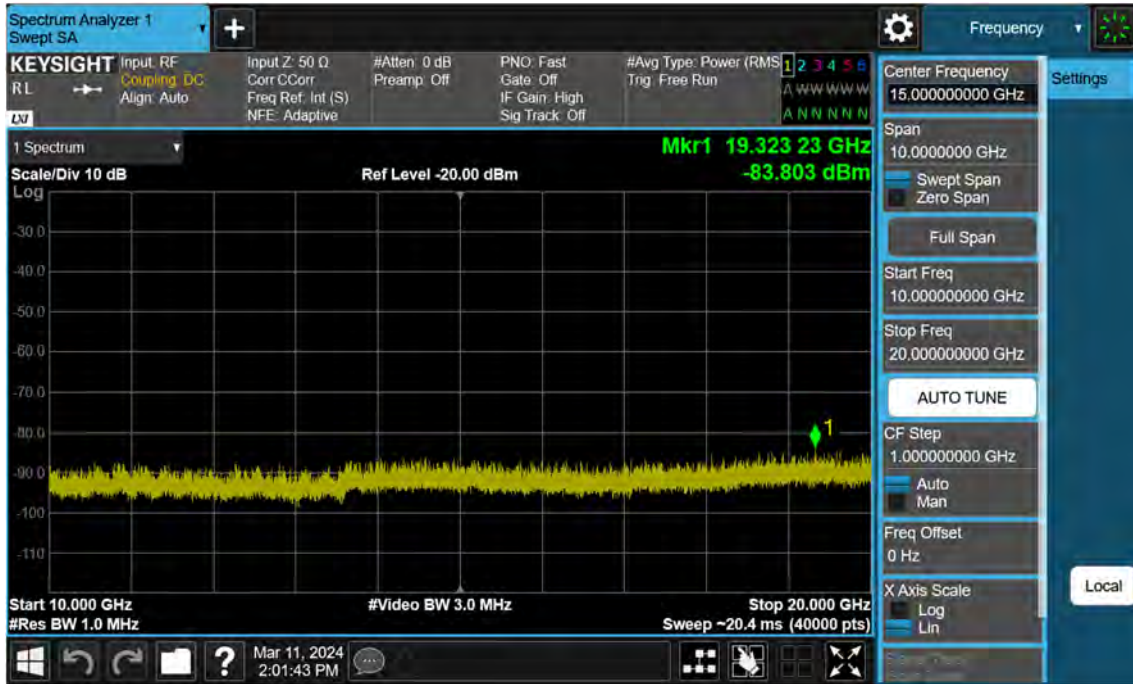


PCC 15 MHz Ch132047 RB75 Offset0, SCC 5 MHz Ch132140 RB25 Offset0

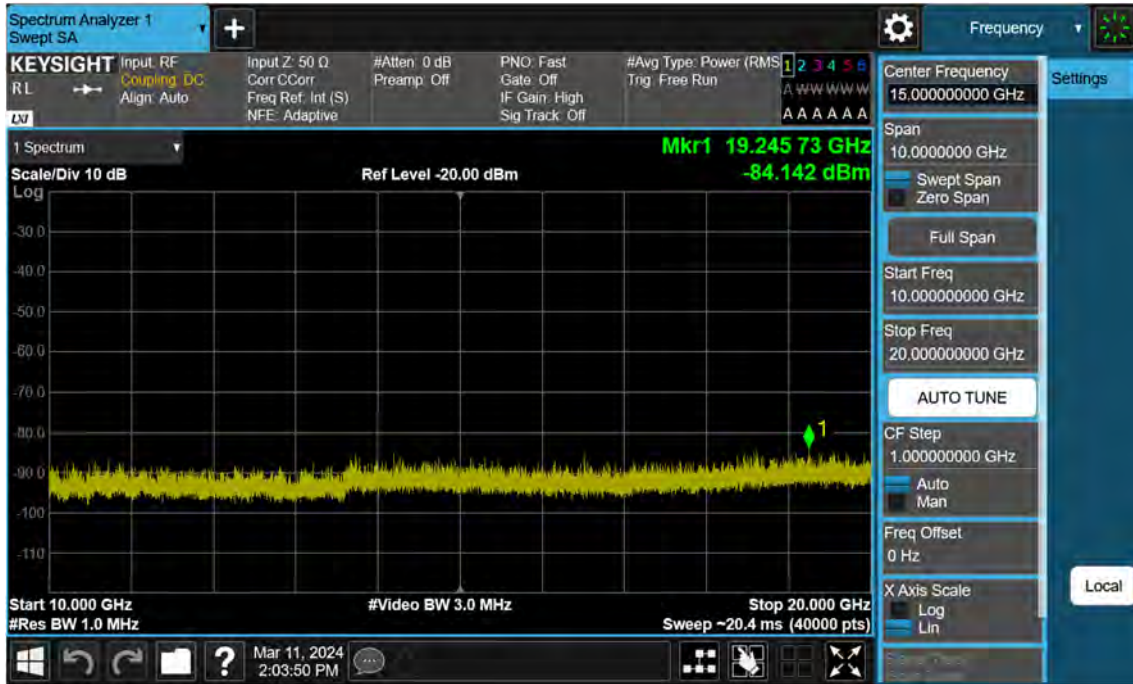


PCC 5 MHz Ch132353 RB25 Offset0, SCC 15 MHz Ch132446 RB75 Offset0

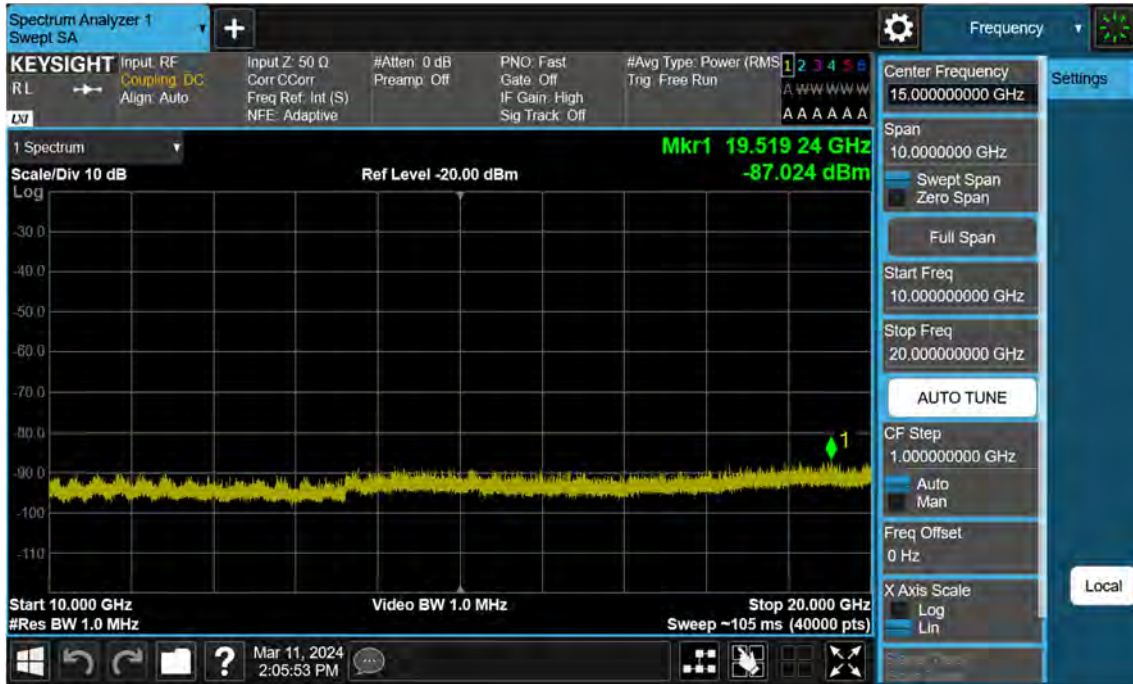

PCC 5 MHz Ch132504 RB25 Offset0, SCC 15 MHz Ch132597 RB75 Offset0

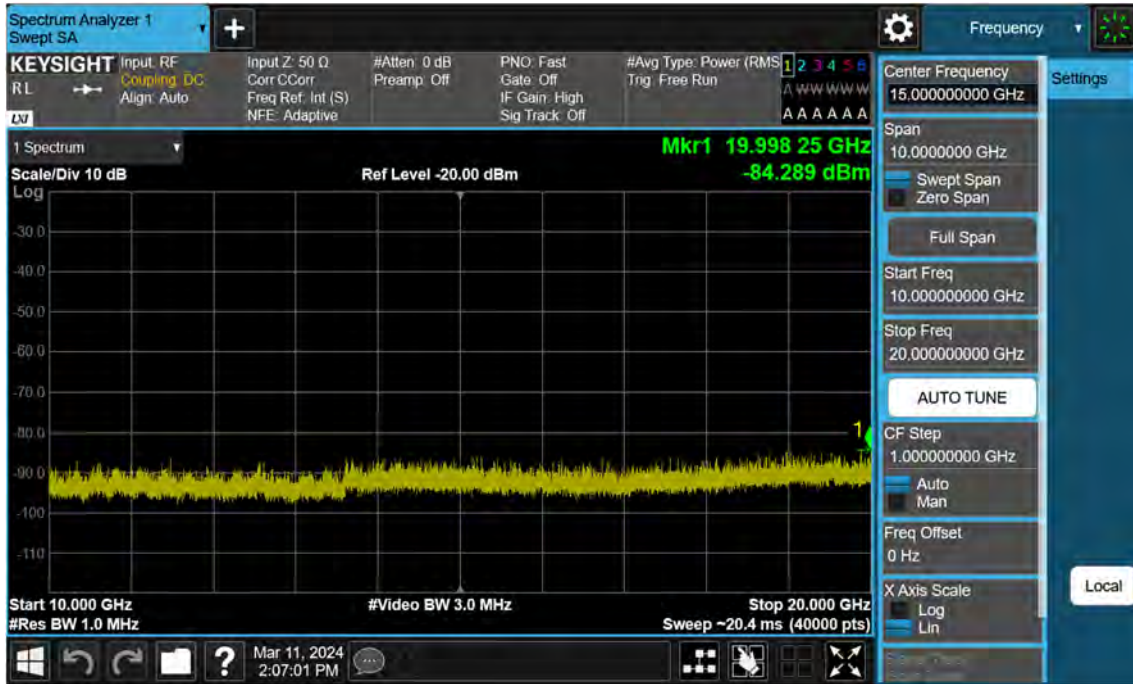

PCC 10 MHz Ch132022 RB50 Offset0, SCC 10 MHz Ch132121 RB50 Offset0

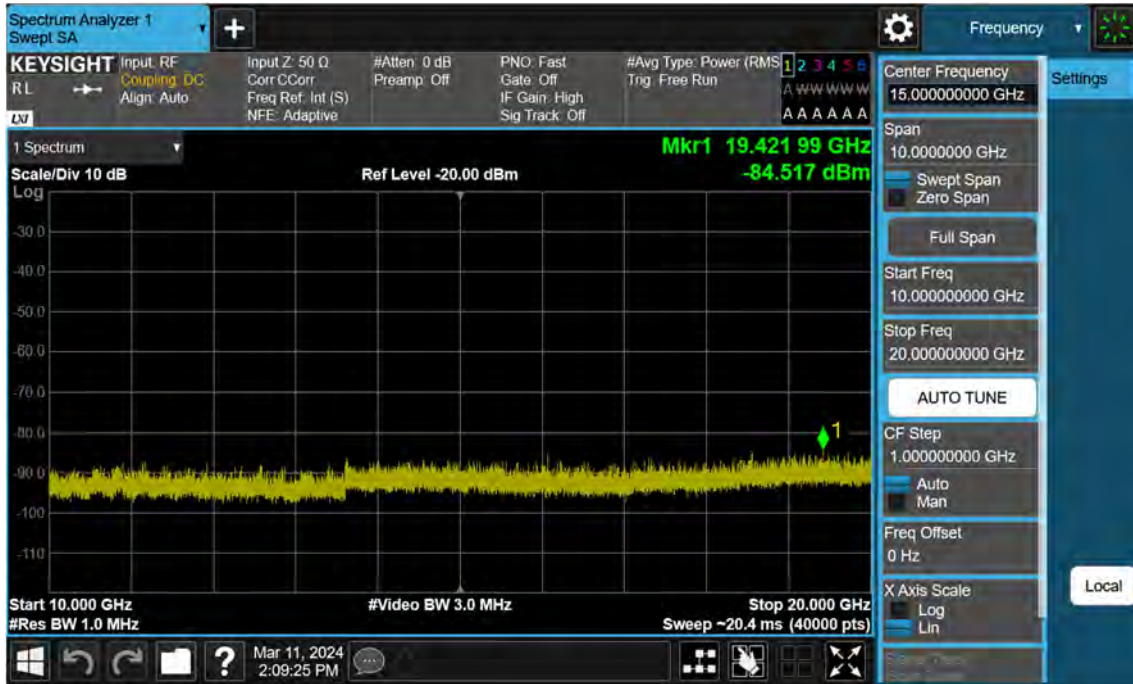


PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0






PCC 10 MHz Ch132523 RB50 Offset0, SCC 10 MHz Ch132622 RB50 Offset0

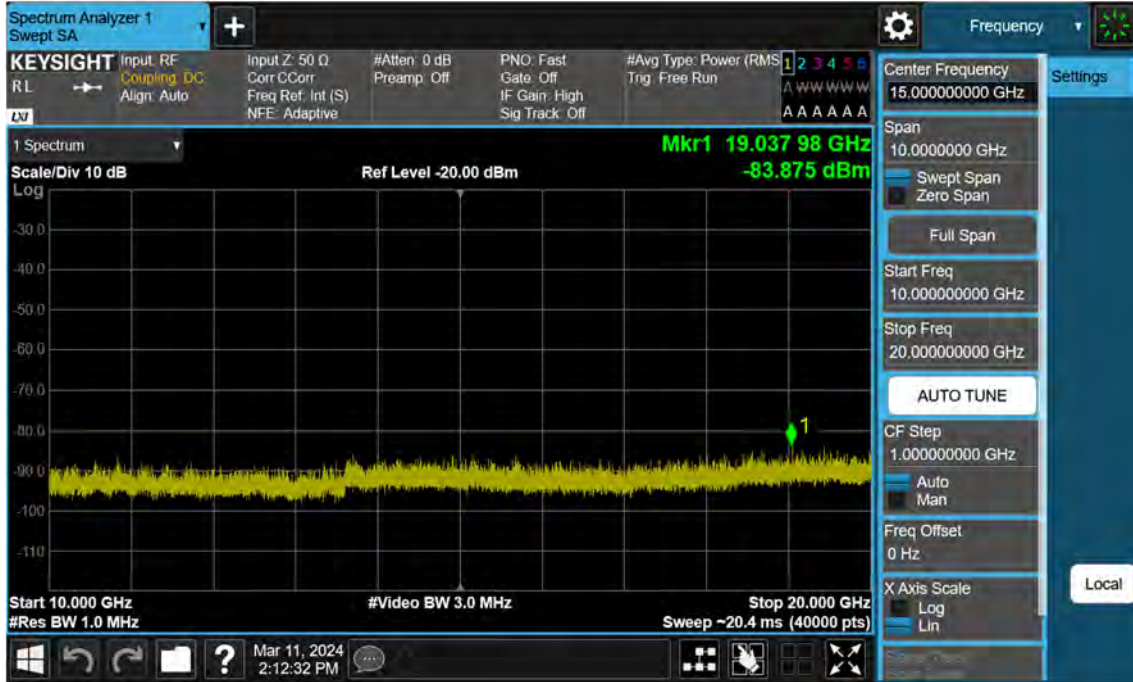


### 8.4 Channel Edge


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74(1)

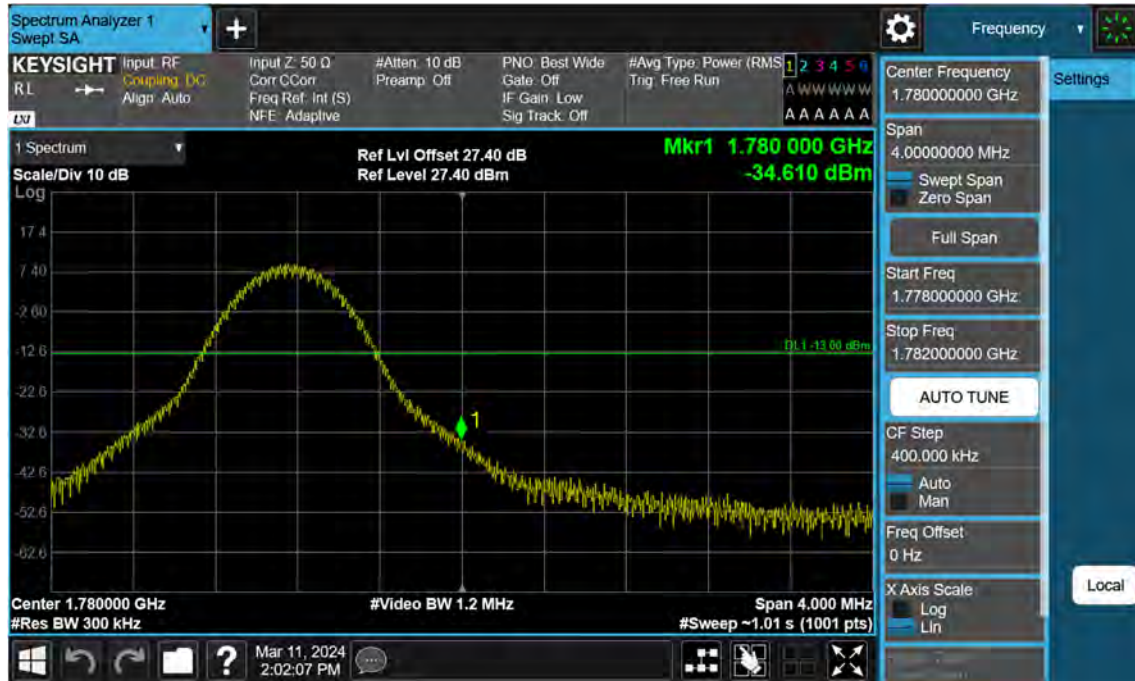


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74(2)

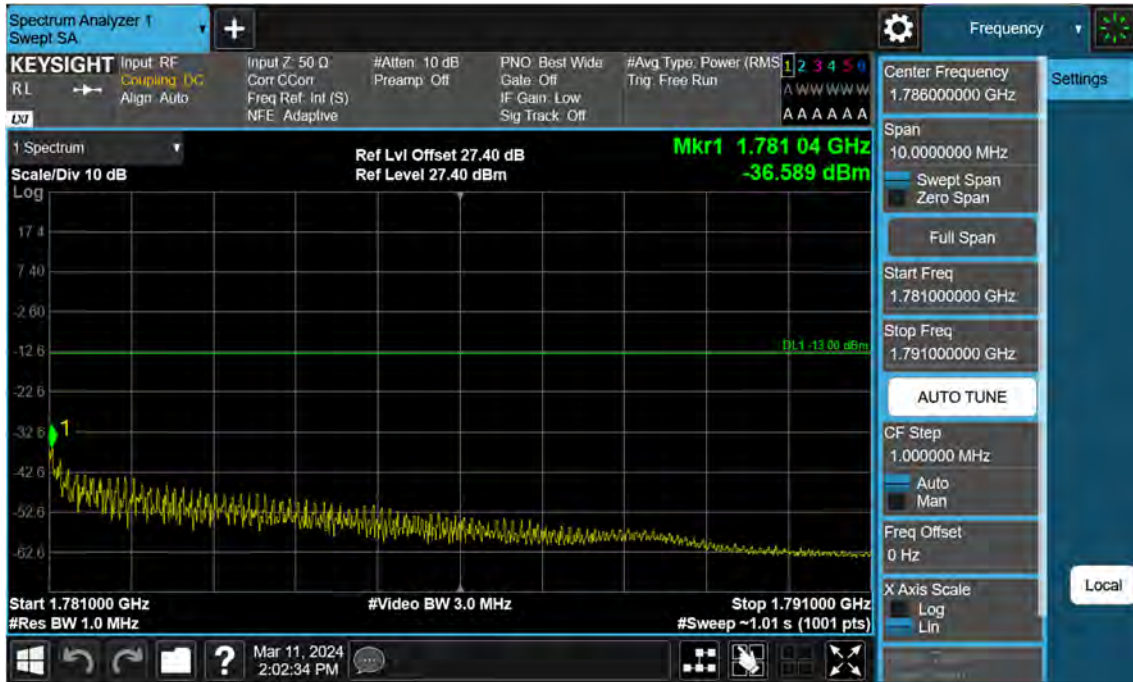


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0(1)

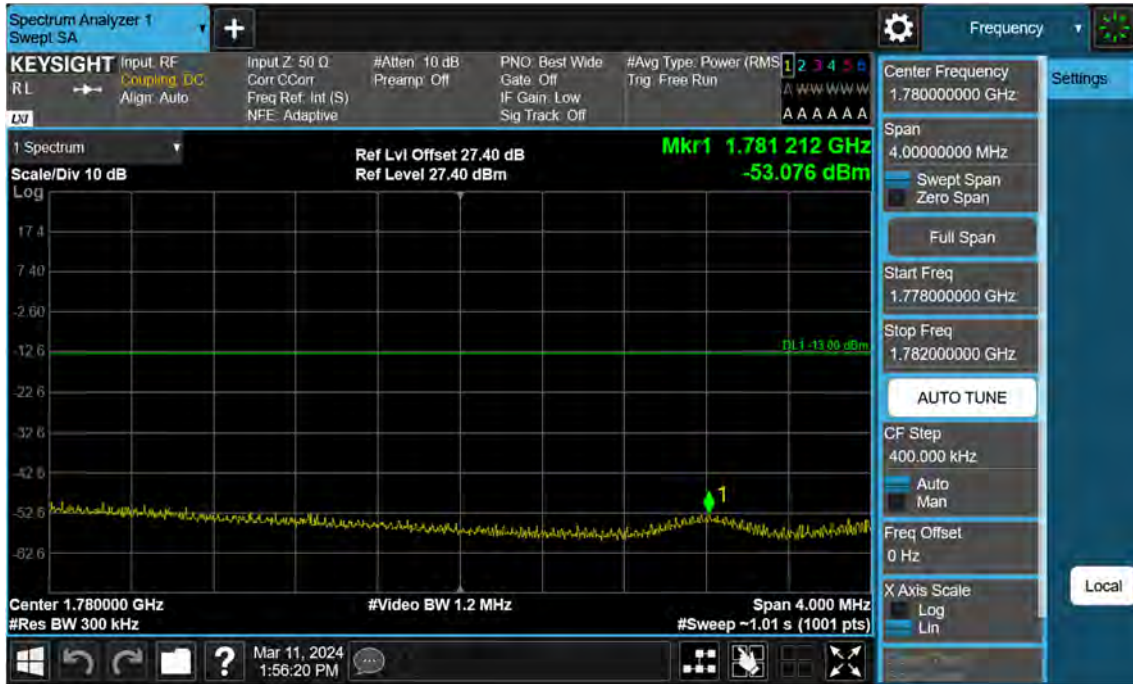


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0(2)

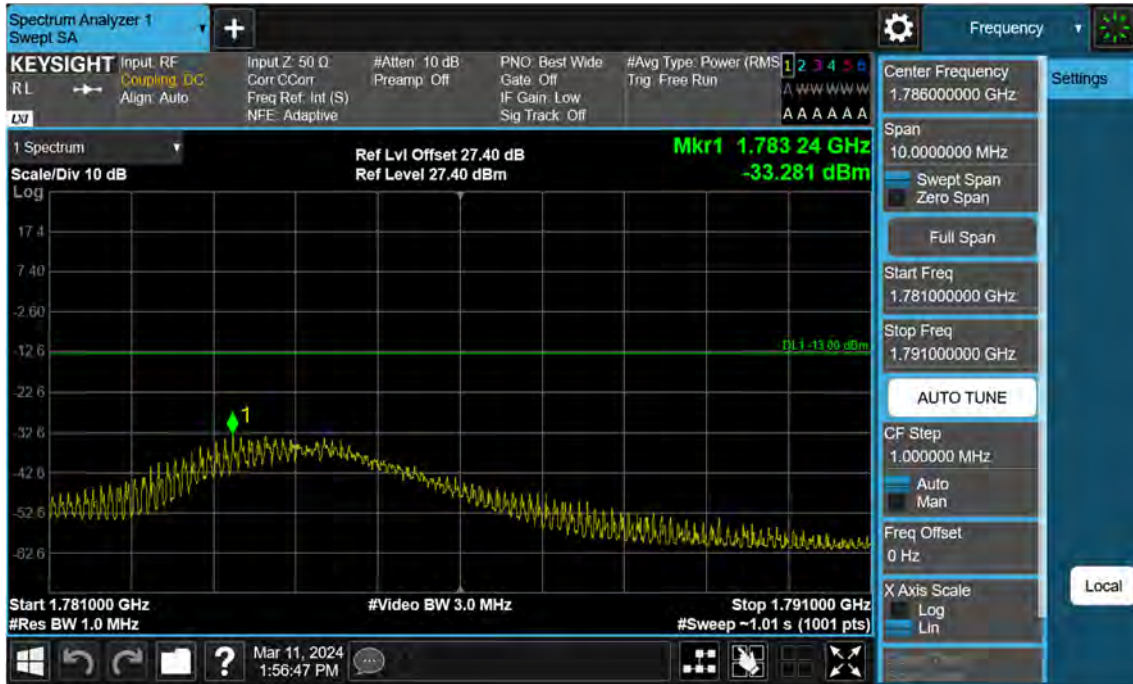

Highest Channel\_PCC 5 MHz Ch132504 RB25 Offset0 SCC 15 MHz Ch132597 RB75 Offset0(1)

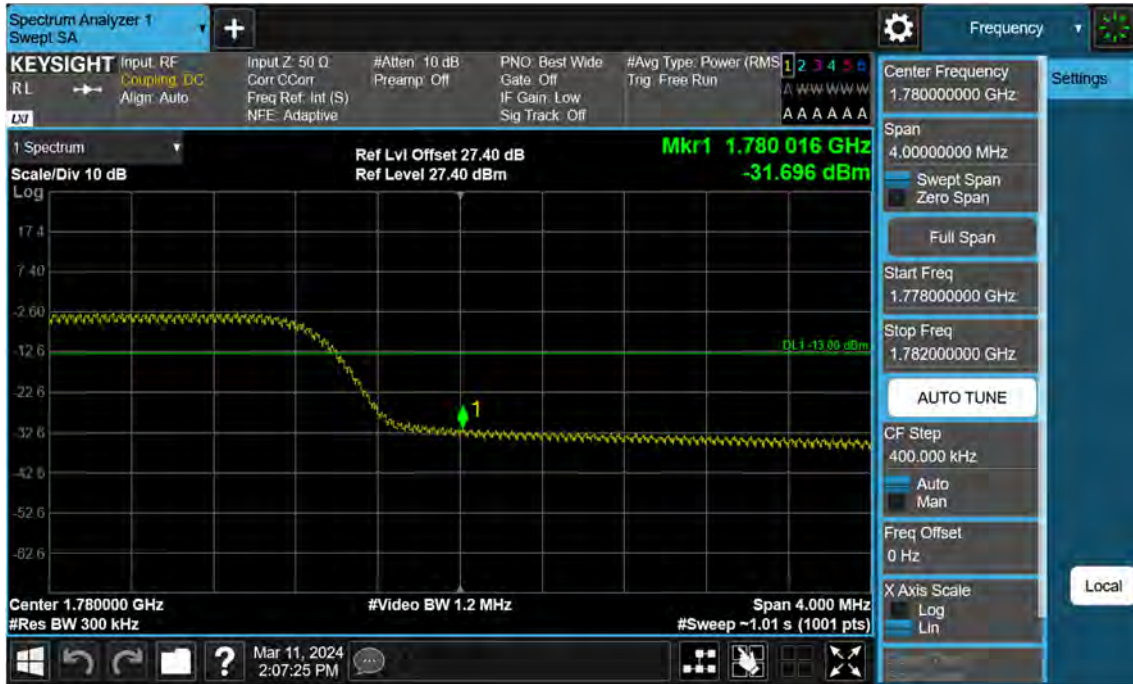

Highest Channel\_PCC 5 MHz Ch132504 RB25 Offset0 SCC 15 MHz Ch132597 RB75 Offset0(2)

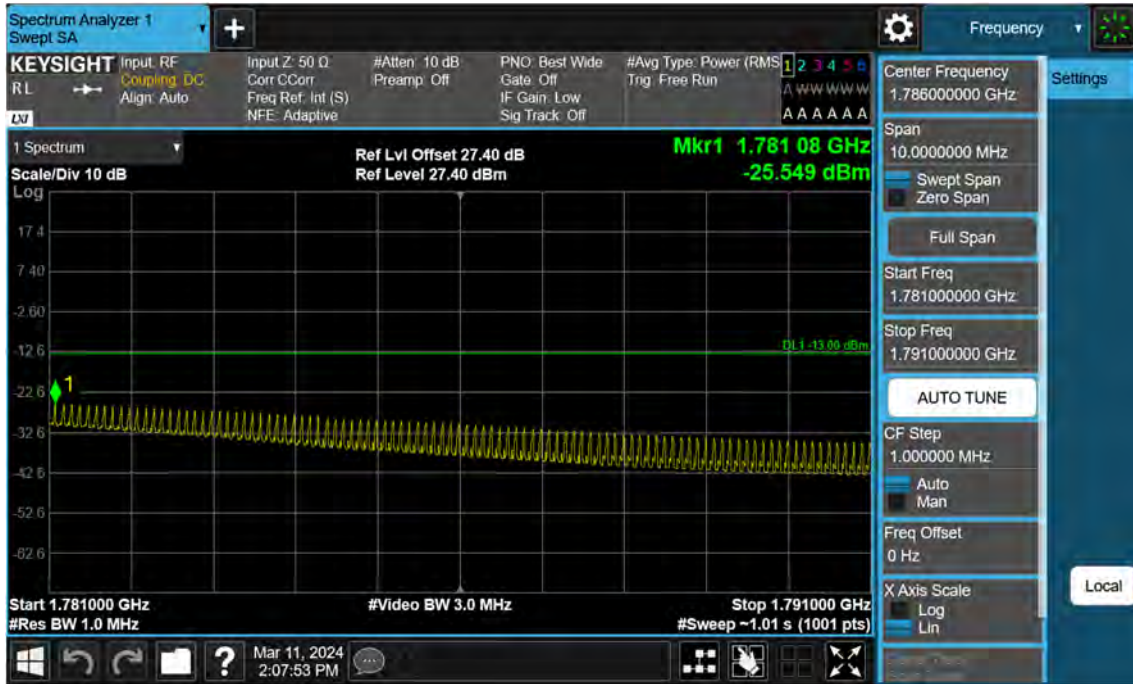


Highest Channel\_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(1)






Highest Channel\_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(2)

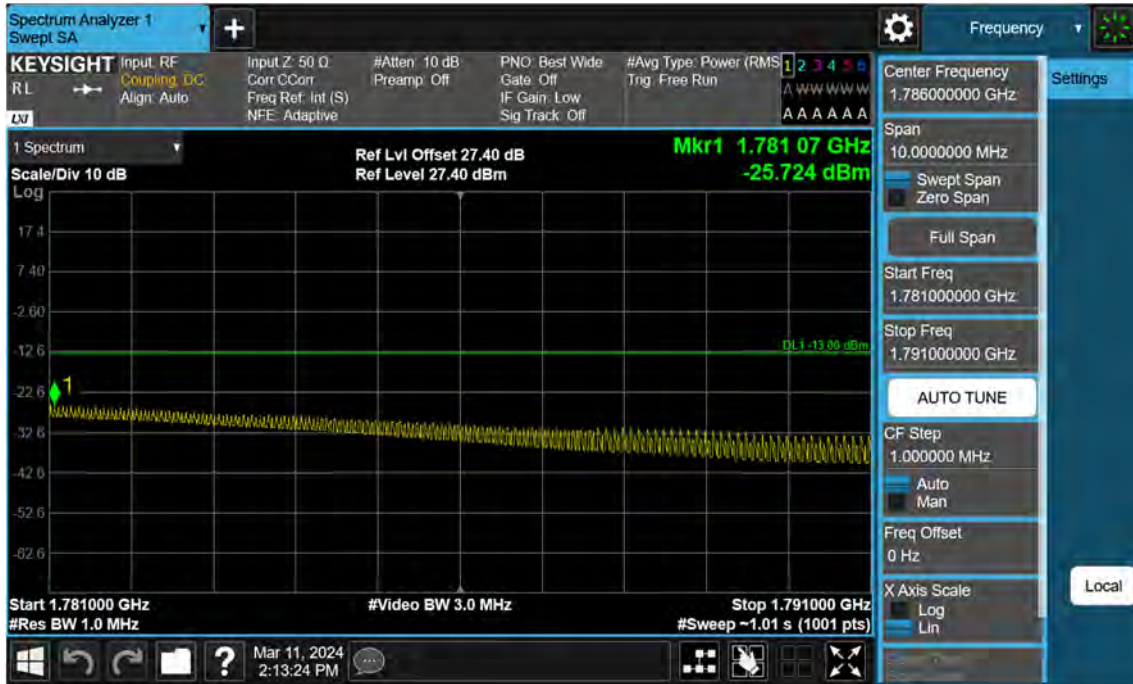


Lowest Channel\_PCC 10 MHz Ch132022 RB1 Offset0 SCC 10 MHz Ch132121 RB1 Offset49(1)

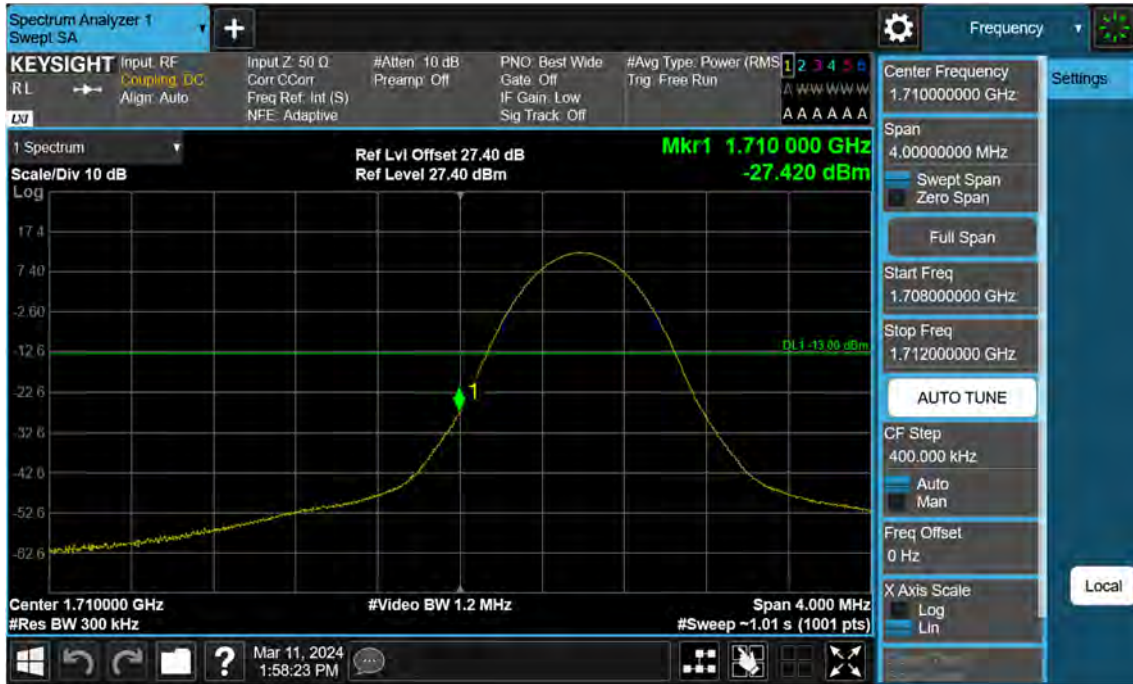


Lowest Channel\_PCC 10 MHz Ch132022 RB1 Offset0 SCC 10 MHz Ch132121 RB1 Offset49(2)




Lowest Channel\_PCC 10 MHz Ch132022 RB1 Offset49 SCC 10 MHz Ch132121 RB1 Offset0(1)

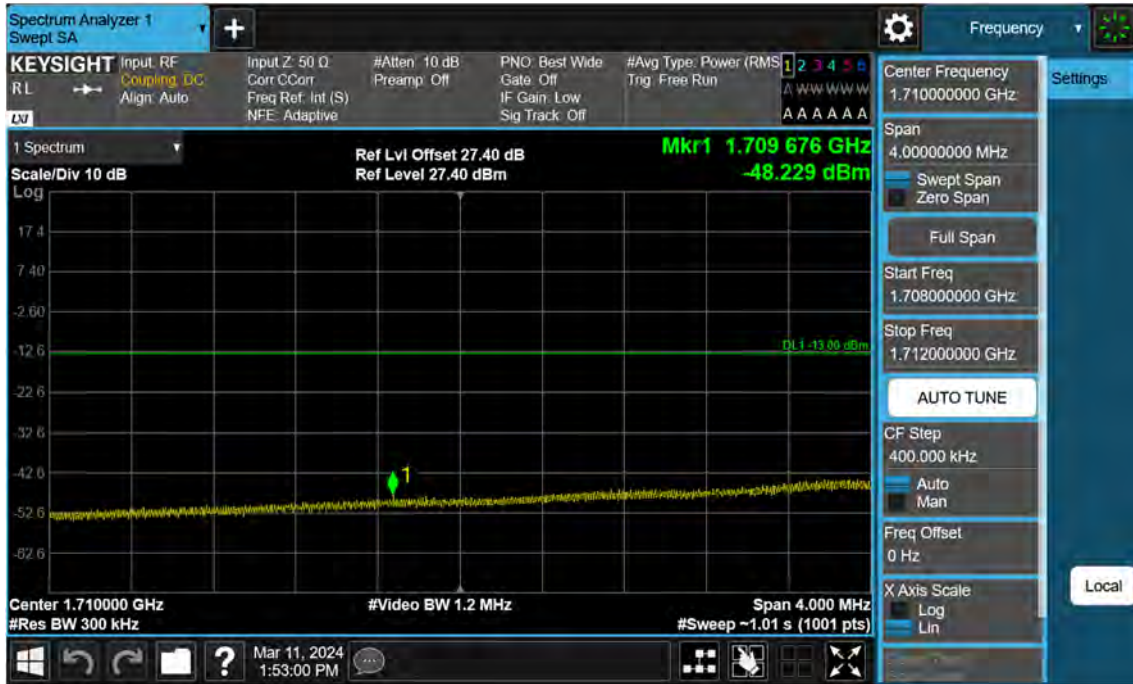

Lowest Channel\_PCC 10 MHz Ch132022 RB1 Offset49 SCC 10 MHz Ch132121 RB1 Offset0(2)

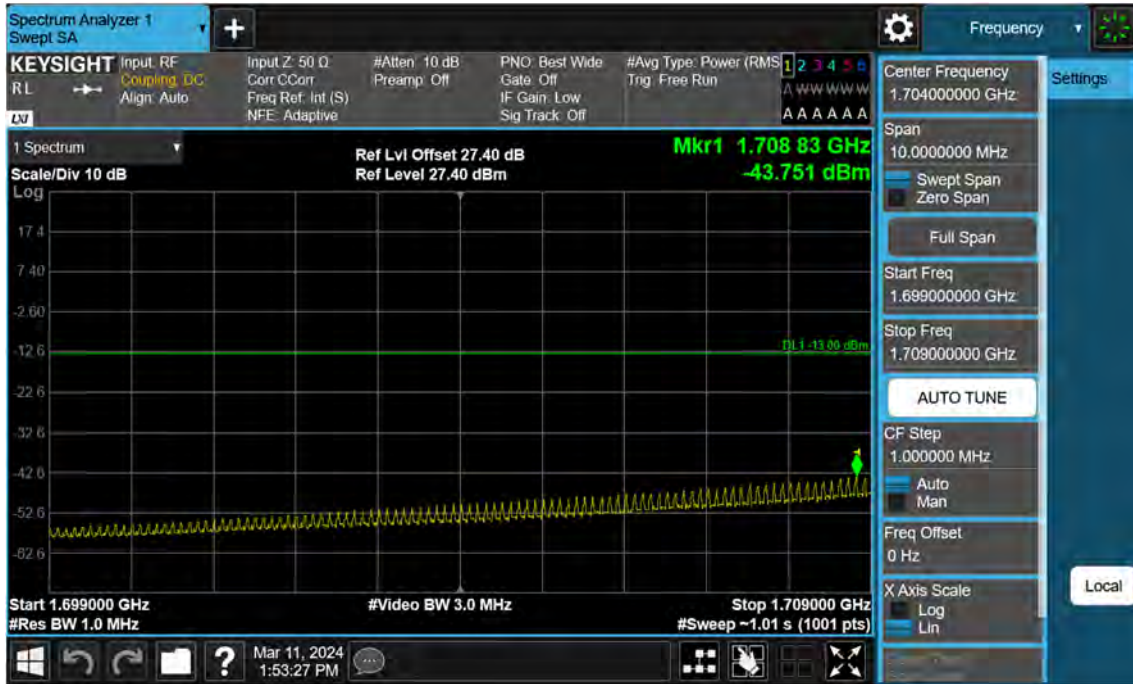


Lowest Channel\_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(1)

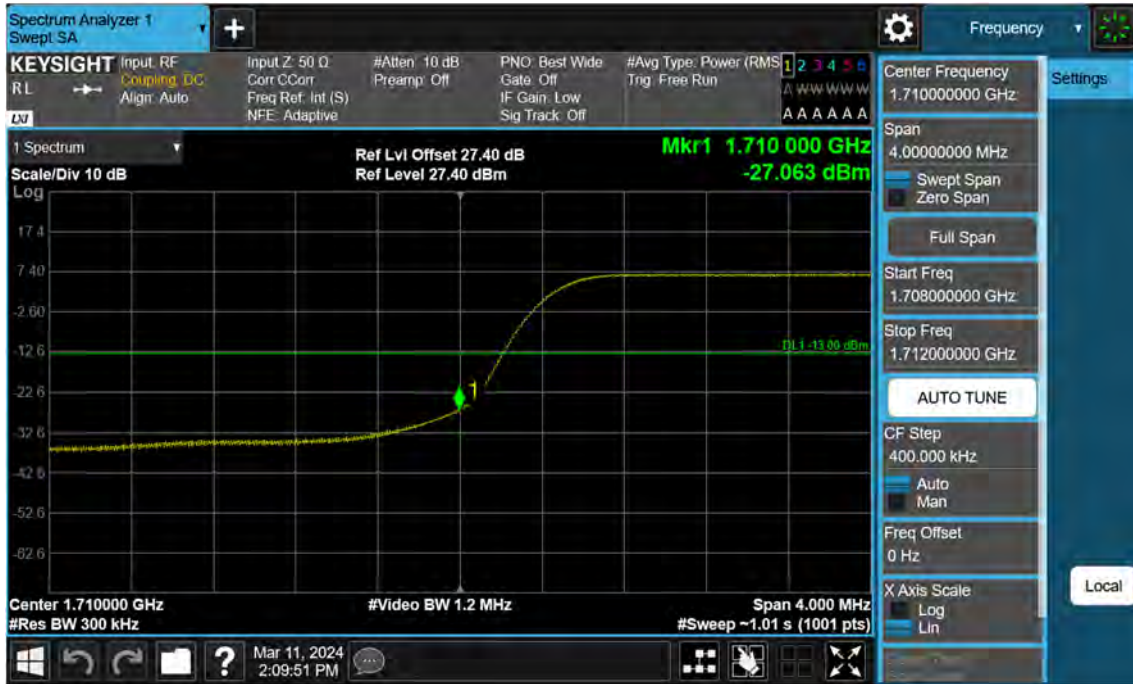

Lowest Channel\_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(2)




Lowest Channel\_PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0(1)

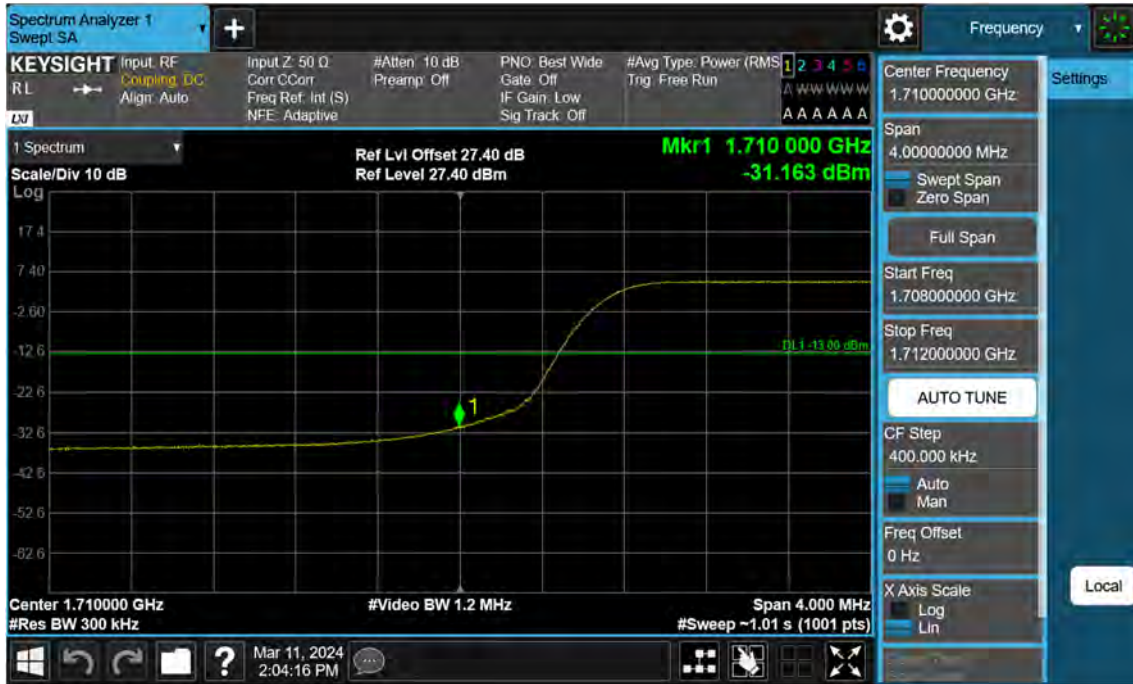



Lowest Channel\_PCC 15 MHz Ch132047 RB75 Offset0 SCC 5 MHz Ch132140 RB25 Offset0(2)

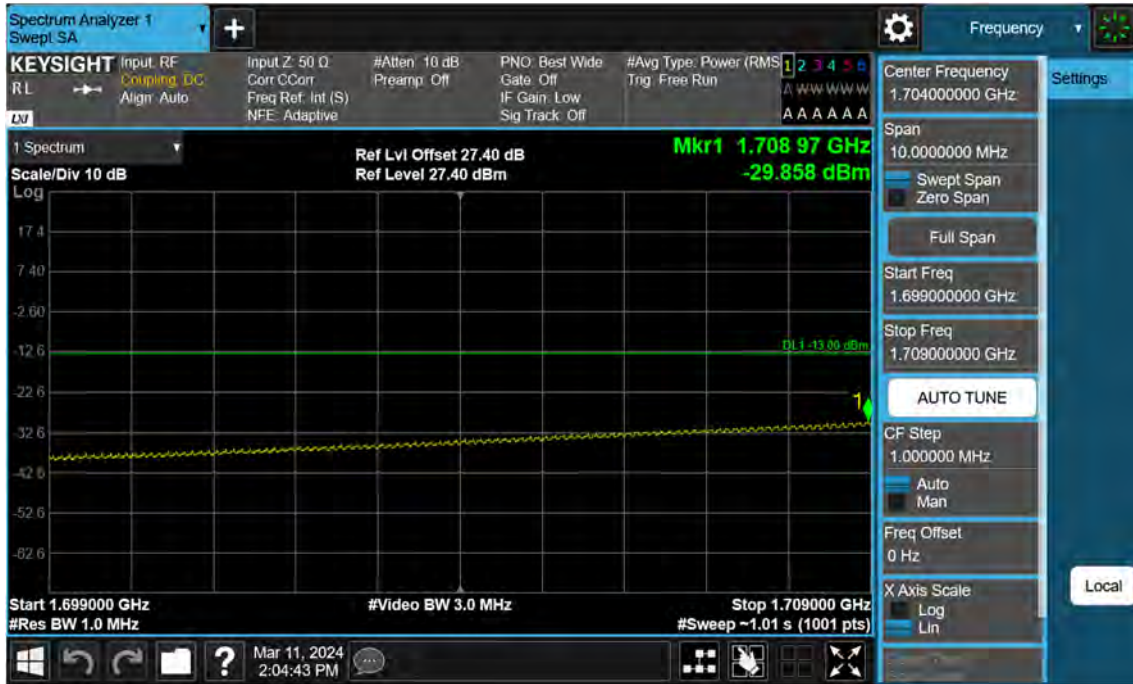

### 8.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 131997
- ▣ PCC Frequency: 1712.5 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132045
- ▣ SCC Frequency: 1717.3 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.028	-0.035	1712.50006	1717.29988
100 %		-30	0.030	0.037	1712.50004	1717.30001
100 %		-20	-0.045	-0.039	1712.49993	1717.29984
100 %		-10	0.019	0.039	1712.50002	1717.29998
100 %		0	0.040	-0.046	1712.49997	1717.29990
100 %		10	-0.047	-0.042	1712.49992	1717.29987
100 %		30	0.035	0.030	1712.49997	1717.30001
100 %		40	-0.039	0.035	1712.49994	1717.30006
100 %		50	0.027	-0.046	1712.49999	1717.29993
Batt. Endpoint		3.300	20	0.036	0.027	1712.50001

- ▣ PCC Channel: 132022
- ▣ PCC Frequency: 1715.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132094
- ▣ SCC Frequency: 1722.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.039	0.019	1715.00002	1722.20001
100 %		-30	0.025	0.023	1715.00001	1722.19997
100 %		-20	0.022	-0.046	1715.00000	1722.19992
100 %		-10	0.034	0.040	1715.00004	1722.20003
100 %		0	0.031	0.029	1714.99996	1722.19996
100 %		10	0.040	0.027	1715.00000	1722.20003
100 %		30	0.033	0.034	1714.99999	1722.20006
100 %		40	0.036	0.025	1715.00004	1722.19996
100 %		50	0.036	-0.032	1715.00004	1722.19989
Batt. Endpoint	3.300	20	0.024	-0.029	1714.99998	1722.19995

- ▣ PCC Channel: 132047
- ▣ PCC Frequency: 1717.5 MHz
- ▣ PCC BandWidth: 15 MHz
- ▣ SCC Channel: 132140
- ▣ SCC Frequency: 1726.8 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.036	0.032	1717.49999	1726.80003
100 %		-30	0.041	0.042	1717.50004	1726.79998
100 %		-20	-0.055	-0.049	1717.49991	1726.79989
100 %		-10	0.025	-0.040	1717.50001	1726.79992
100 %		0	-0.040	-0.040	1717.49988	1726.79984
100 %		10	0.028	0.027	1717.49998	1726.79996
100 %		30	0.041	0.040	1717.49999	1726.80001
100 %		40	0.037	0.024	1717.50004	1726.80005
100 %		50	-0.037	0.033	1717.49986	1726.80007
Batt. Endpoint		3.300	20	0.025	0.034	1717.50003

- ▣ PCC Channel: 132599
- ▣ PCC Frequency: 1772.7 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132647
- ▣ SCC Frequency: 1777.5 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.028	-0.035	1772.70002	1777.49986
100 %		-30	0.044	0.038	1772.69999	1777.50006
100 %		-20	0.031	0.041	1772.70000	1777.50002
100 %		-10	-0.039	-0.041	1772.69990	1777.49990
100 %		0	0.021	-0.030	1772.70001	1777.49993
100 %		10	-0.041	0.038	1772.69989	1777.50007
100 %		30	0.024	-0.037	1772.69999	1777.49986
100 %		40	-0.037	0.039	1772.69986	1777.50006
100 %		50	-0.048	0.032	1772.69984	1777.50005
Batt. Endpoint		3.300	20	0.024	-0.053	1772.70000

- ▣ PCC Channel: 132572
- ▣ PCC Frequency: 1770.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132644
- ▣ SCC Frequency: 1777.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.042	-0.030	1770.00001	1777.19985
100 %		-30	0.032	-0.043	1770.00003	1777.19990
100 %		-20	-0.041	0.037	1769.99986	1777.20003
100 %		-10	0.032	-0.045	1769.99999	1777.19983
100 %		0	-0.036	-0.047	1769.99987	1777.19990
100 %		10	0.024	-0.046	1769.99998	1777.19989
100 %		30	0.037	0.033	1770.00006	1777.20000
100 %		40	0.024	0.028	1769.99999	1777.19999
100 %		50	-0.037	-0.049	1769.99989	1777.19987
Batt. Endpoint		3.300	20	-0.044	0.025	1769.99986

- ▣ PCC Channel: 132549
- ▣ PCC Frequency: 1767.7 MHz
- ▣ PCC BandWidth: 15 MHz
- ▣ SCC Channel: 132642
- ▣ SCC Frequency: 1777.0 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.026	0.037	1767.70003	1777.00002
100 %		-30	-0.036	0.026	1767.69984	1776.99999
100 %		-20	0.033	-0.048	1767.69998	1776.99986
100 %		-10	-0.047	0.032	1767.69988	1777.00004
100 %		0	-0.041	0.026	1767.69985	1776.99999
100 %		10	-0.036	-0.049	1767.69990	1776.99989
100 %		30	-0.029	-0.046	1767.69988	1776.99987
100 %		40	-0.042	0.029	1767.69989	1777.00001
100 %		50	-0.047	0.042	1767.69991	1777.00004
Batt. Endpoint		3.300	20	0.036	-0.050	1767.70006

### 8.6 Radiated Spurious Emissions

- ▣ PCC Channel : 132002 (1713.0 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132095 (1722.3 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 435.30	-54.62	12.41	-60.90	3.12	V	-51.61
5 152.95	-57.11	12.39	-55.09	3.84	H	-46.54
6 870.60	-57.36	11.85	-50.30	4.50	H	-42.95



- ▣ PCC Channel : 132353 (1748.1 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132446 (1757.4 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 505.50	-54.69	12.34	-60.91	3.11	H	-51.68
5 258.25	-57.23	12.99	-56.91	3.83	H	-47.75
7 011.00	-56.18	11.26	-48.20	4.56	H	-41.50

- ▣ PCC Channel : 132504 (1763.2 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132597 (1772.5 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 535.70	-55.12	12.34	-61.17	3.17	V	-52.00
5 303.55	-57.32	13.07	-56.55	3.95	V	-47.43
7 071.40	-57.10	10.97	-48.26	4.55	H	-41.84

### 8.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/0	5	132446	1757.4	QPSK	25/0	9.2547
5	132375	1750.3	QPSK	25/0	10	132447	1757.5	QPSK	50/0	13.925
10	132397	1752.5	QPSK	50/0	5	132469	1759.7	QPSK	25/0	13.897
5	132353	1748.1	QPSK	25/0	15	132446	1757.4	QPSK	75/0	18.211
15	132398	1752.6	QPSK	75/0	5	132491	1761.9	QPSK	25/0	18.241
10	132373	1750.1	QPSK	50/0	10	132472	1760.0	QPSK	50/0	18.841

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/0	5	132446	1757.4	16QAM	25/0	9.2346
5	132375	1750.3	16QAM	25/0	10	132447	1757.5	16QAM	50/0	13.880
10	132397	1752.5	16QAM	50/0	5	132469	1759.7	16QAM	25/0	13.967
5	132353	1748.1	16QAM	25/0	15	132446	1757.4	16QAM	75/0	18.181
15	132398	1752.6	16QAM	75/0	5	132491	1761.9	16QAM	25/0	18.279
10	132373	1750.1	16QAM	50/0	10	132472	1760.0	16QAM	50/0	18.775

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/0	5	132446	1757.4	64QAM	25/0	9.2745
5	132375	1750.3	64QAM	25/0	10	132447	1757.5	64QAM	50/0	13.854
10	132397	1752.5	64QAM	50/0	5	132469	1759.7	64QAM	25/0	13.951
5	132353	1748.1	64QAM	25/0	15	132446	1757.4	64QAM	75/0	18.143
15	132398	1752.6	64QAM	75/0	5	132491	1761.9	64QAM	25/0	18.246
10	132373	1750.1	64QAM	50/0	10	132472	1760.0	64QAM	50/0	18.765

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/0	5	132446	1757.4	256QAM	25/0	9.2692
5	132375	1750.3	256QAM	25/0	10	132447	1757.5	256QAM	50/0	13.881
10	132397	1752.5	256QAM	50/0	5	132469	1759.7	256QAM	25/0	13.925
5	132353	1748.1	256QAM	25/0	15	132446	1757.4	256QAM	75/0	18.172
15	132398	1752.6	256QAM	75/0	5	132491	1761.9	256QAM	25/0	18.269
10	132373	1750.1	256QAM	50/0	10	132472	1760.0	256QAM	50/0	18.817

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).


PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(QPSK)




PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(64QAM)

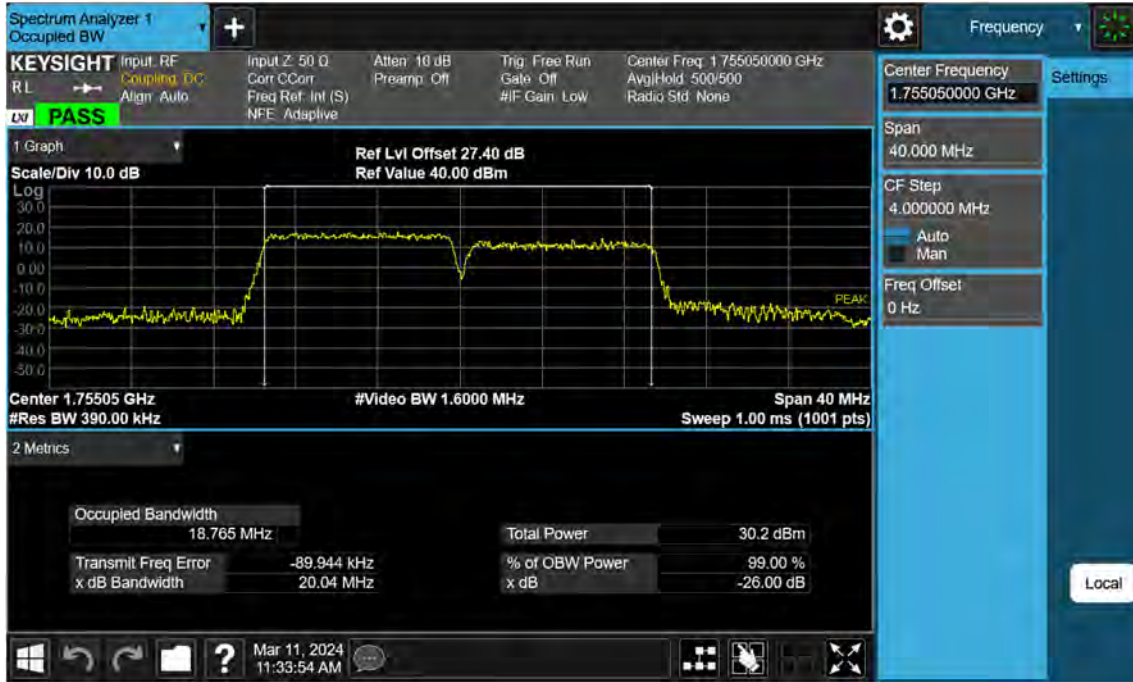

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(256QAM)

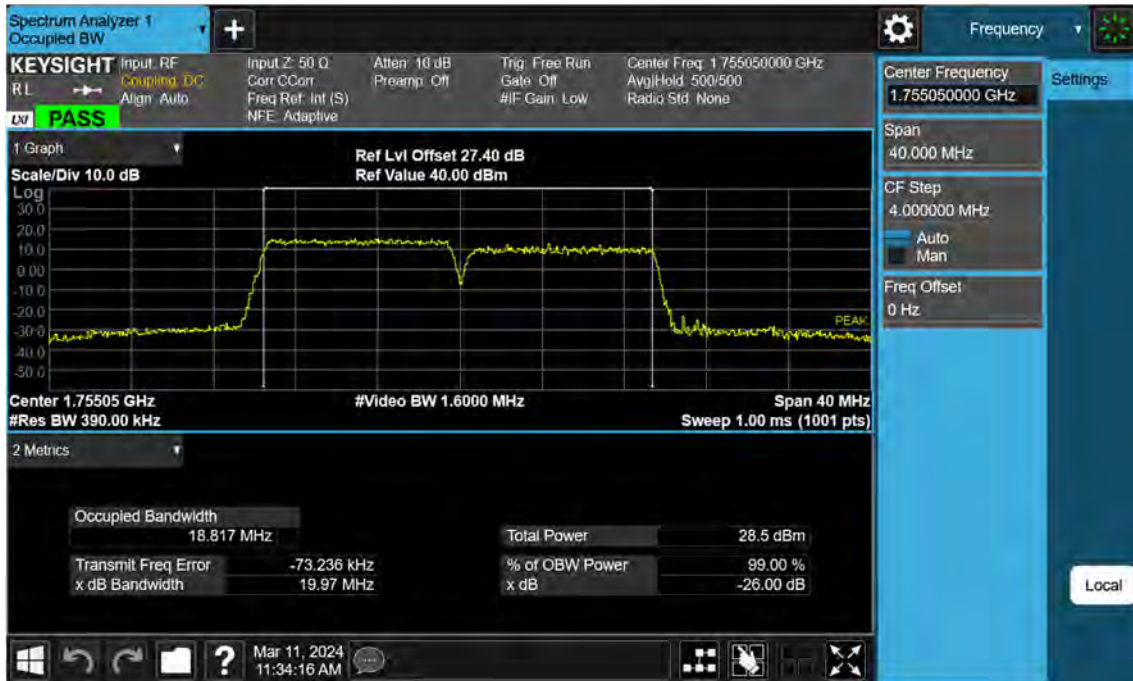



### 8.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	5.29
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	5.43
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	5.42
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	5.37
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	5.42
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	5.42

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	6.28
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	6.32
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	6.40
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	6.34
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	6.38
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	6.38


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/0	5	132446	1757.4	64QAM	25/0	6.82
5	132375	1750.3	64QAM	25/0	10	132447	1757.5	64QAM	50/0	6.81
10	132397	1752.5	64QAM	50/0	5	132469	1759.7	64QAM	25/0	6.87
5	132353	1748.1	64QAM	25/0	15	132446	1757.4	64QAM	75/0	6.85
15	132398	1752.6	64QAM	75/0	5	132491	1761.9	64QAM	25/0	6.86
10	132373	1750.1	64QAM	50/0	10	132472	1760.0	64QAM	50/0	7.00

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/0	5	132446	1757.4	256QAM	25/0	6.94
5	132375	1750.3	256QAM	25/0	10	132447	1757.5	256QAM	50/0	6.90
10	132397	1752.5	256QAM	50/0	5	132469	1759.7	256QAM	25/0	6.90
5	132353	1748.1	256QAM	25/0	15	132446	1757.4	256QAM	75/0	6.97
15	132398	1752.6	256QAM	75/0	5	132491	1761.9	256QAM	25/0	6.87
10	132373	1750.1	256QAM	50/0	10	132472	1760.0	256QAM	50/0	7.00

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(QPSK)

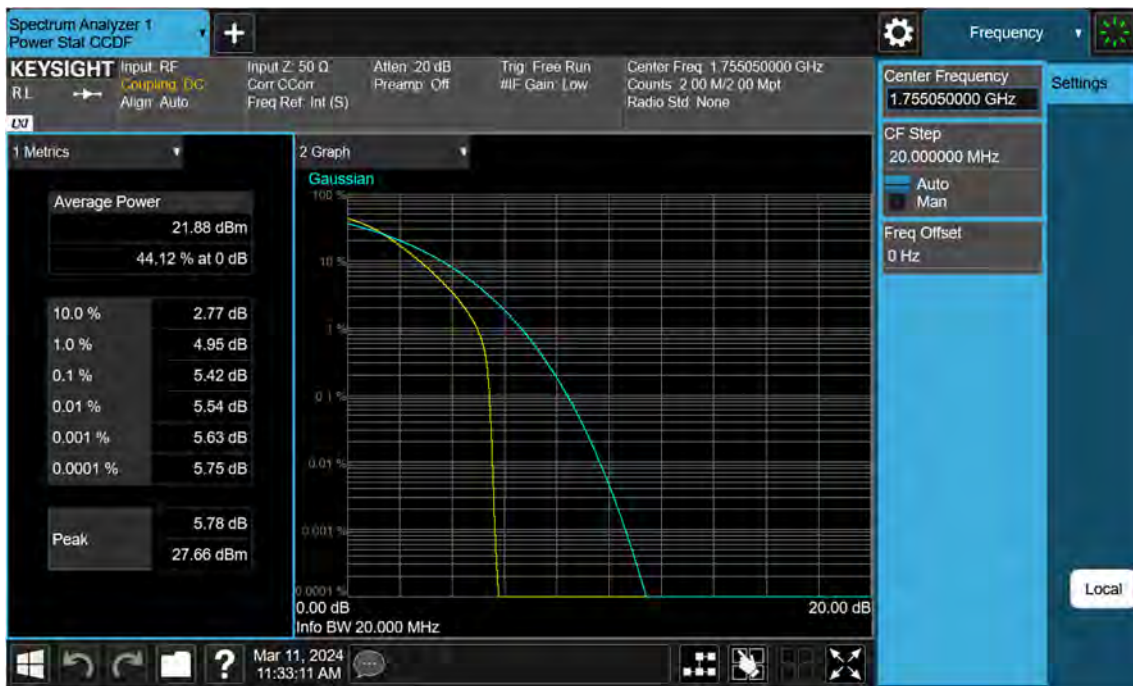

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(64QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(256QAM)



## 9. TEST DATA(Sub 5 Ant)

### Test Overview

The EUT is set up to transmit two contiguous LTE channels. The power level of both carriers and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

### Test Note

1. All tests were evaluated for the two contiguous channels using various combinations of RB size, RB offset, modulation, and channel bandwidth.
2. Channel bandwidth is shown in the tables below based only on the channel bandwidths that were supported in this device.

Channel Bandwidth (PCC)	Channel Bandwidth (SCC)	Maximum aggregated bandwidth (MHz)
5	5	10
5	10	15
10	5	15
5	15	20
15	5	20
10	10	20

3. All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- Worst case(Conducted Spurious Emissions, Band Edge)  
: We have selected higher of the Conduction Output Power.
  - Worst case(Radiated Spurious Emissions) : We have selected higher of the EIRP.
  - Worst case(OBW, PAR, Frequency stability)  
: All modes of operation were investigated and the worst case configuration results are reported.
4. All modes of operation were investigated and the worst case configuration results are reported.  
Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc.)  
Worst case : Stand alone
5. We were performed the RSE test in condition of co-location.  
Mode : Stand alone, Simultaneous transmission scenarios  
Worst case : Stand alone
6. All 3 channels(low/mid/high) of conducted power and radiated power were investigated and the worst case channel results are reported.
7. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.  
Worst case: half-open mode.

[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
Conducted Spurious Emissions/ Band Edge	QPSK	Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0
		Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0
		High	5	1763.2	132504	1	24	15	1772.5	132597	1	0
		Low	5	1712.5	131997	1	0	5	1717.3	132045	1	24
		Mid	15	1752.6	132398	1	0	5	1761.9	132491	1	24
		High	5	1763.2	132504	1	0	15	1772.5	132597	1	74
		Low	5	1712.8	132000	25	0	10	1720.0	132072	50	0
		Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
		Low	10	1715.0	132022	50	0	10	1724.9	132121	50	0
High	10	1765.1	132523	50	0	10	1775.0	132622	50	0		
Radiated Spurious Emissions	QPSK	Low	10	1715.0	132022	1	49	5	1722.2	132094	1	0
		Mid	5	1748.1	132353	1	24	15	1757.4	132446	1	0
		High	5	1763.2	132504	1	24	15	1772.5	132597	1	0



[ Worst case ]

Test Description	Mod	Operating frequency	PCC					SCC				
			BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset	BW (MHz)	Freq. (MHz)	Ch.	RB	RB Offset
OBW, PAR	QPSK, 16QAM, 64QAM, 256QAM	Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0
			5	1750.3	132375	25	0	10	1757.5	132447	50	0
			10	1752.5	132397	50	0	5	1759.7	132469	25	0
			5	1748.1	132353	25	0	15	1757.4	132446	75	0
			15	1752.6	132398	75	0	5	1761.9	132491	25	0
			10	1750.1	132373	50	0	10	1760.0	132472	50	0
Frequency stability	QPSK	Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0
			10	1715.0	132022	50	0	5	1722.2	132094	25	0
			15	1717.5	132047	75	0	5	1726.8	132140	25	0
		High	5	1772.7	132599	25	0	5	1777.5	132647	25	0
			10	1770.0	132572	50	0	5	1777.2	132644	25	0
			15	1767.7	132549	75	0	5	1777.0	132642	25	0

## 9.1 Conducted Power

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	<b>5</b>	<b>1712.5</b>	<b>131997</b>	<b>1</b>	<b>24</b>	<b>5</b>	<b>1717.3</b>	<b>132045</b>	<b>1</b>	<b>0</b>	<b>24.75</b>
	5	1712.8	132000	1	24	10	1720.0	132072	1	0	24.67
	10	1715.0	132022	1	49	5	1722.2	132094	1	0	24.71
	5	1713.0	132002	1	24	15	1722.3	132095	1	0	24.68
	15	1717.5	132047	1	74	5	1726.8	132140	1	0	24.73
	10	1715.0	132022	1	49	10	1724.9	132121	1	0	24.68
Mid	5	1752.6	132398	1	24	5	1757.4	132446	1	0	24.66
	5	1750.3	132375	1	24	10	1757.5	132447	1	0	24.64
	10	1752.5	132397	1	49	5	1759.7	132469	1	0	24.62
	5	1748.1	132353	1	24	15	1757.4	132446	1	0	24.60
	<b>15</b>	<b>1752.6</b>	<b>132398</b>	<b>1</b>	<b>74</b>	<b>5</b>	<b>1761.9</b>	<b>132491</b>	<b>1</b>	<b>0</b>	<b>24.69</b>
	10	1750.1	132373	1	49	10	1760.0	132472	1	0	24.58
High	5	1772.7	132599	1	24	5	1777.5	132647	1	0	24.55
	5	1767.8	132550	1	24	10	1775.0	132622	1	0	24.58
	10	1770.0	132572	1	49	5	1777.2	132644	1	0	24.62
	<b>5</b>	<b>1763.2</b>	<b>132504</b>	<b>1</b>	<b>24</b>	<b>15</b>	<b>1772.5</b>	<b>132597</b>	<b>1</b>	<b>0</b>	<b>24.67</b>
	15	1767.7	132549	1	74	5	1777.0	132642	1	0	24.63
	10	1765.1	132523	1	49	10	1775.0	132622	1	0	24.58

Note:

Modulation : QPSK(1RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	25	0	5	1717.3	132045	25	0	22.86
	5	1712.8	132000	25	0	10	1720.0	132072	50	0	22.94
	10	1715.0	132022	50	0	5	1722.2	132094	25	0	22.87
	<b>5</b>	<b>1713.0</b>	<b>132002</b>	<b>25</b>	<b>0</b>	<b>15</b>	<b>1722.3</b>	<b>132095</b>	<b>75</b>	<b>0</b>	<b>22.88</b>
	15	1717.5	132047	75	0	5	1726.8	132140	25	0	22.80
	10	1715.0	132022	50	0	10	1724.9	132121	50	0	22.85
Mid	5	1752.6	132398	25	0	5	1757.4	132446	25	0	22.83
	5	1750.3	132375	25	0	10	1757.5	132447	50	0	22.81
	10	1752.5	132397	50	0	5	1759.7	132469	25	0	22.84
	5	1748.1	132353	25	0	15	1757.4	132446	75	0	22.80
	15	1752.6	132398	75	0	5	1761.9	132491	25	0	22.84
	<b>10</b>	<b>1750.1</b>	<b>132373</b>	<b>50</b>	<b>0</b>	<b>10</b>	<b>1760.0</b>	<b>132472</b>	<b>50</b>	<b>0</b>	<b>22.85</b>
High	<b>5</b>	<b>1772.7</b>	<b>132599</b>	<b>25</b>	<b>0</b>	<b>5</b>	<b>1777.5</b>	<b>132647</b>	<b>25</b>	<b>0</b>	<b>22.85</b>
	5	1767.8	132550	25	0	10	1775.0	132622	50	0	22.77
	10	1770.0	132572	50	0	5	1777.2	132644	25	0	22.79
	5	1763.2	132504	25	0	15	1772.5	132597	75	0	22.84
	15	1767.7	132549	75	0	5	1777.0	132642	25	0	22.84
	10	1765.1	132523	50	0	10	1775.0	132622	50	0	22.78

Note:

Modulation : QPSK(Full RB)

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	24.27
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	24.22
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	24.36
Low	5	1712.8	132000	25	0	10	1720.0	132072	50	0	22.20
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	22.12
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	22.05

Note:

Modulation : 16QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	23.41
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	23.29
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	23.33
Low	5	1712.8	132000	25	0	10	1720.0	132072	50	0	22.15
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	22.05
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	22.03

Note:

Modulation : 64QAM

Operating frequency	PCC					SCC					Conducted. Power [dBm]
	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	Bandwidth [MHz]	Freq. (MHz)	Channel	RB	RB Offset	
Low	5	1712.5	131997	1	24	5	1717.3	132045	1	0	20.39
Mid	15	1752.6	132398	1	74	5	1761.9	132491	1	0	20.26
High	5	1763.2	132504	1	24	15	1772.5	132597	1	0	20.38
Low	5	1712.8	132000	25	0	10	1720.0	132072	50	0	20.21
Mid	10	1750.1	132373	50	0	10	1760.0	132472	50	0	20.13
High	5	1772.7	132599	25	0	5	1777.5	132647	25	0	20.13

Note:

Modulation : 256QAM

## 9.2 Equivalent Isotropic Radiated Power

	PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
	BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
Low	5	131997	1/24	5	132045	1/0	-19.34	14.28	9.98	2.23	H	0.159	22.02
	5	132000	1/24	10	132072	1/0	-19.49	14.13	9.98	2.23	H	0.154	21.87
	<b>10</b>	<b>132022</b>	<b>1/49</b>	<b>5</b>	<b>132094</b>	<b>1/0</b>	<b>-19.32</b>	<b>14.19</b>	<b>10.01</b>	<b>2.22</b>	<b>H</b>	<b>0.158</b>	<b>21.98</b>
	5	132002	1/24	15	132095	1/0	-19.44	14.07	10.01	2.22	H	0.153	21.86
	15	132047	1/74	5	132140	1/0	-19.41	14.10	10.01	2.22	H	0.155	21.89
	10	132022	1/49	10	132121	1/0	-19.45	14.06	10.01	2.22	H	0.153	21.85
Mid	5	132398	1/24	5	132446	1/0	-19.91	13.77	10.18	2.17	H	0.151	21.78
	5	132375	1/24	10	132447	1/0	-19.86	13.82	10.18	2.17	H	0.152	21.83
	10	132397	1/49	5	132469	1/0	-19.88	13.80	10.18	2.17	H	0.152	21.81
	<b>5</b>	<b>132353</b>	<b>1/24</b>	<b>15</b>	<b>132446</b>	<b>1/0</b>	<b>-19.72</b>	<b>13.99</b>	<b>10.17</b>	<b>2.15</b>	<b>H</b>	<b>0.159</b>	<b>22.01</b>
	15	132398	1/74	5	132491	1/0	-19.92	13.73	10.19	2.18	H	0.149	21.74
	10	132373	1/49	10	132472	1/0	-19.91	13.77	10.18	2.17	H	0.151	21.78
High	5	132599	1/24	5	132647	1/0	-20.25	13.40	10.21	2.25	H	0.137	21.36
	5	132550	1/24	10	132622	1/0	-20.21	13.40	10.20	2.23	H	0.137	21.37
	10	132572	1/49	5	132644	1/0	-20.23	13.42	10.21	2.25	H	0.137	21.38
	<b>5</b>	<b>132504</b>	<b>1/24</b>	<b>15</b>	<b>132597</b>	<b>1/0</b>	<b>-20.07</b>	<b>13.54</b>	<b>10.20</b>	<b>2.23</b>	<b>H</b>	<b>0.141</b>	<b>21.51</b>
	15	132549	1/74	5	132642	1/0	-20.21	13.40	10.20	2.23	H	0.137	21.37
	10	132523	1/49	10	132622	1/0	-20.17	13.44	10.20	2.23	H	0.138	21.41

Note:

1. Modulation : QPSK
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	132022	1/49	5	132094	1/0	-19.81	13.70	10.01	2.22	H	0.141	21.49
5	132398	1/24	5	132446	1/0	-20.41	13.27	10.18	2.17	H	0.134	21.28
5	132375	1/24	10	132447	1/0	-20.34	13.34	10.18	2.17	H	0.136	21.35
10	132397	1/49	5	132469	1/0	-20.38	13.30	10.18	2.17	H	0.135	21.31
5	132353	1/24	15	132446	1/0	-20.23	13.48	10.17	2.15	H	0.141	21.50
15	132398	1/74	5	132491	1/0	-20.42	13.23	10.19	2.18	H	0.133	21.24
10	132373	1/49	10	132472	1/0	-20.34	13.34	10.18	2.17	H	0.137	21.35
5	132504	1/24	15	132597	1/0	-20.58	13.03	10.20	2.23	H	0.126	21.00

Note:

1. Modulation : 16QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	132022	1/49	5	132094	1/0	-20.80	12.71	10.01	2.22	H	0.112	20.50
5	132398	1/24	5	132446	1/0	-21.43	12.25	10.18	2.17	H	0.106	20.26
5	132375	1/24	10	132447	1/0	-21.36	12.32	10.18	2.17	H	0.108	20.33
10	132397	1/49	5	132469	1/0	-21.39	12.29	10.18	2.17	H	0.107	20.30
5	132353	1/24	15	132446	1/0	-21.23	12.48	10.17	2.15	H	0.112	20.50
15	132398	1/74	5	132491	1/0	-21.42	12.23	10.19	2.18	H	0.106	20.24
10	132373	1/49	10	132472	1/0	-21.38	12.30	10.18	2.17	H	0.107	20.31
5	132504	1/24	15	132597	1/0	-21.56	12.05	10.20	2.23	H	0.100	20.02

Note:

1. Modulation : 64QAM
2. Limit : < 1 Watts

PCC			SCC			Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	E.I.R.P	
BW [MHz]	Channel	RB/Offset	BW [MHz]	Channel	RB/Offset						W	dBm
10	132022	1/49	5	132094	1/0	-23.92	9.59	10.01	2.22	H	0.055	17.38
5	132398	1/24	5	132446	1/0	-24.46	9.22	10.18	2.17	H	0.053	17.23
5	132375	1/24	10	132447	1/0	-24.41	9.27	10.18	2.17	H	0.053	17.28
10	132397	1/49	5	132469	1/0	-24.42	9.26	10.18	2.17	H	0.053	17.27
5	132353	1/24	15	132446	1/0	-24.26	9.45	10.17	2.15	H	0.056	17.47
15	132398	1/74	5	132491	1/0	-24.46	9.19	10.19	2.18	H	0.052	17.20
10	132373	1/49	10	132472	1/0	-24.48	9.20	10.18	2.17	H	0.053	17.21
5	132504	1/24	15	132597	1/0	-24.65	8.96	10.20	2.23	H	0.049	16.93

Note:

1. Modulation : 256QAM
2. Limit : < 1 Watts

### 9.3 Conducted Spurious Emissions

Operating frequency	PCC				SCC				Measurement Maximum Frequency (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)
	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset	BW [MHz]	Ch.	Freq. (MHz)	RB/Offset				
Low	5	131997	1712.5	1/24	5	132045	1717.3	1/0	9.7069	28.591	-75.38	-46.79
Mid	15	132398	1752.6	1/74	5	132491	1761.9	1/0	8.2592	28.590	-74.58	-45.99
High	5	132504	1763.2	1/24	15	132597	1772.5	1/0	5.1925	28.591	-76.17	-47.58
Low	5	131997	1712.5	1/0	5	132045	1717.3	1/24	8.2777	28.591	-75.77	-47.18
Mid	15	132398	1752.6	1/0	5	132491	1761.9	1/24	8.2772	28.591	-76.55	-47.96
High	5	132504	1763.2	1/0	15	132597	1772.5	1/74	8.2837	28.591	-76.23	-47.64
Low	5	132000	1712.8	25/0	10	132072	1720.0	50/0	9.1371	28.591	-76.37	-47.78
Mid	10	132373	1750.1	50/0	10	132472	1760.0	50/0	8.2747	28.591	-75.81	-47.22
High	5	132599	1772.7	25/0	5	132647	1777.5	25/0	8.2627	28.591	-75.25	-46.66
Low	10	132022	1715.0	50/0	10	132121	1724.9	50/0	9.7293	28.591	-76.26	-47.67
High	10	132523	1765.1	50/0	10	132622	1775.0	50/0	8.0155	28.591	-76.26	-47.67

Note:

1. Modulation : QPSK
2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter
3. Factors for frequency :

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

4. Limit : -13.0 dBm



Frequency Range : 30 MHz ~ 10 GHz

PCC 5 MHz Ch131997 RB1 Offset24 SCC 5 MHz Ch132045 RB1 Offset0




PCC 15 MHz Ch132398 RB1 Offset74 SCC 5 MHz Ch132491 RB1 Offset0



PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0



PCC 5 MHz Ch131997 RB1 Offset0 SCC 5 MHz Ch132045 RB1 Offset24

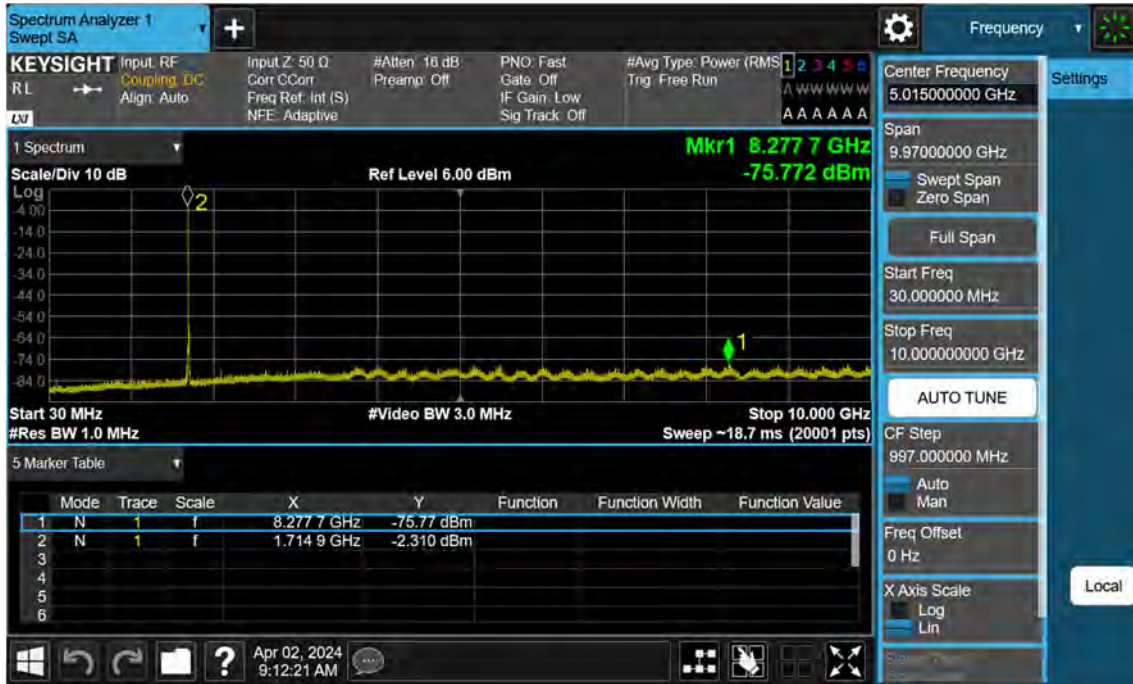

PCC 15 MHz Ch132398 RB1 Offset0 SCC 5 MHz Ch132491 RB1 Offset24



PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74



PCC 5 MHz Ch132000 RB25 Offset0 SCC 10 MHz Ch132072 RB50 Offset0



PCC 10 MHz Ch132373 RB50 Offset0 SCC 10 MHz Ch132472 RB50 Offset0






PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0



PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0




PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0

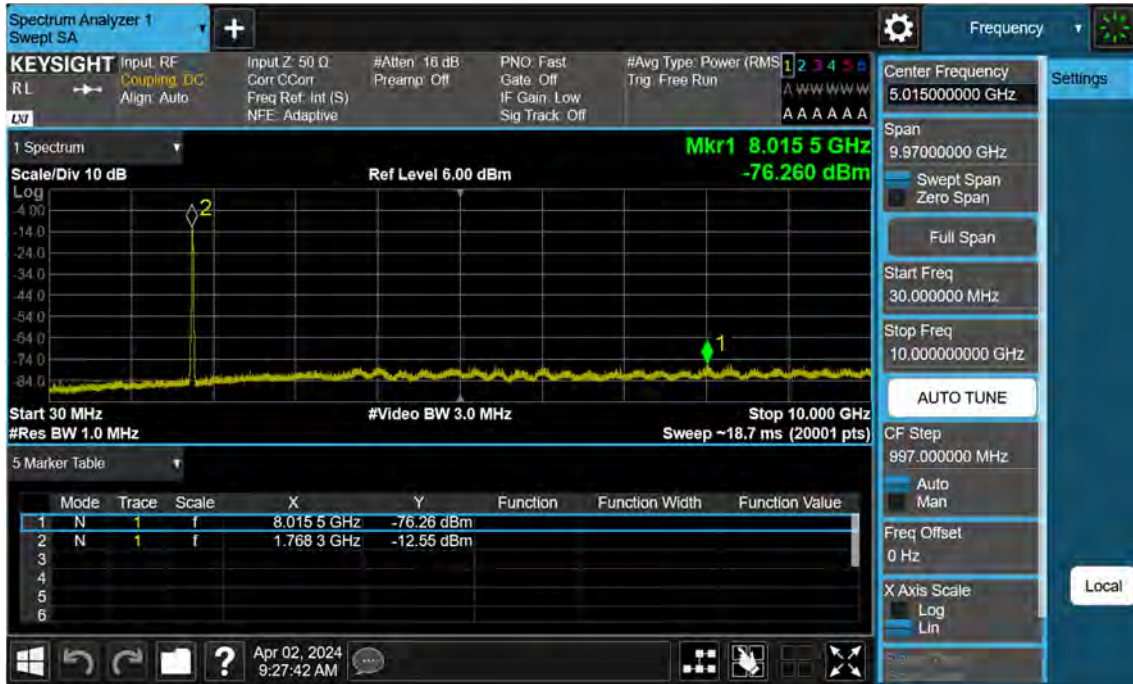


Frequency Range : 10 GHz ~ 20 GHz

PCC 5 MHz Ch131997 RB1 Offset24, SCC 5 MHz Ch132045 RB1 Offset0

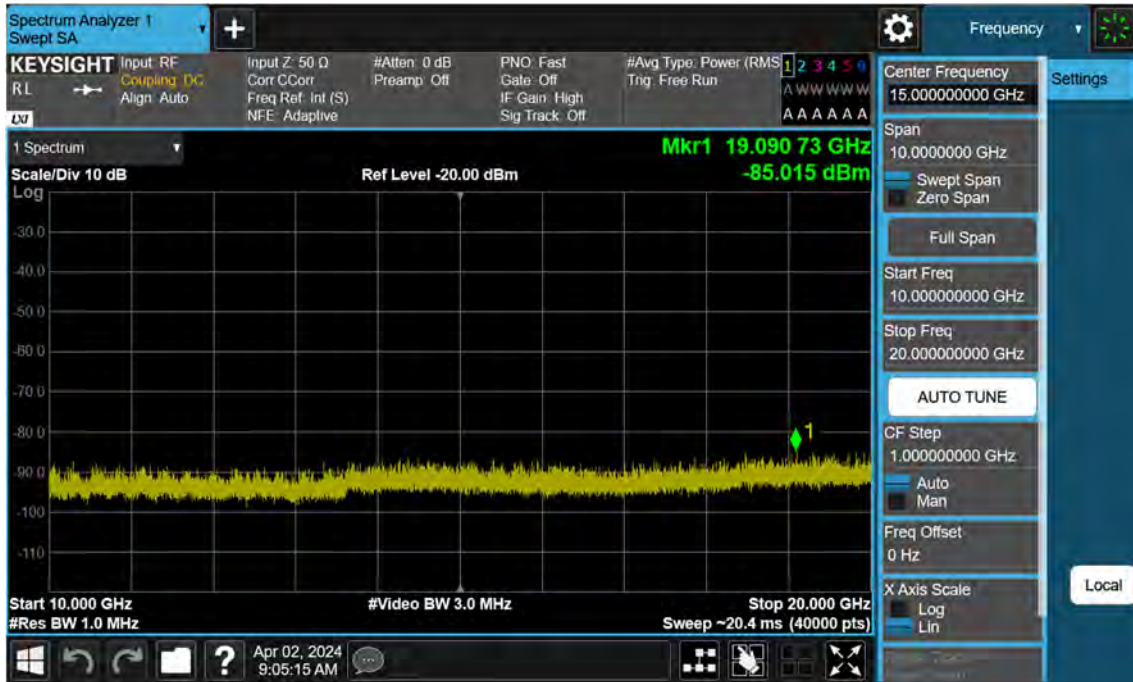

PCC 15 MHz Ch132398 RB1 Offset74, SCC 5 MHz Ch132491 RB1 Offset0

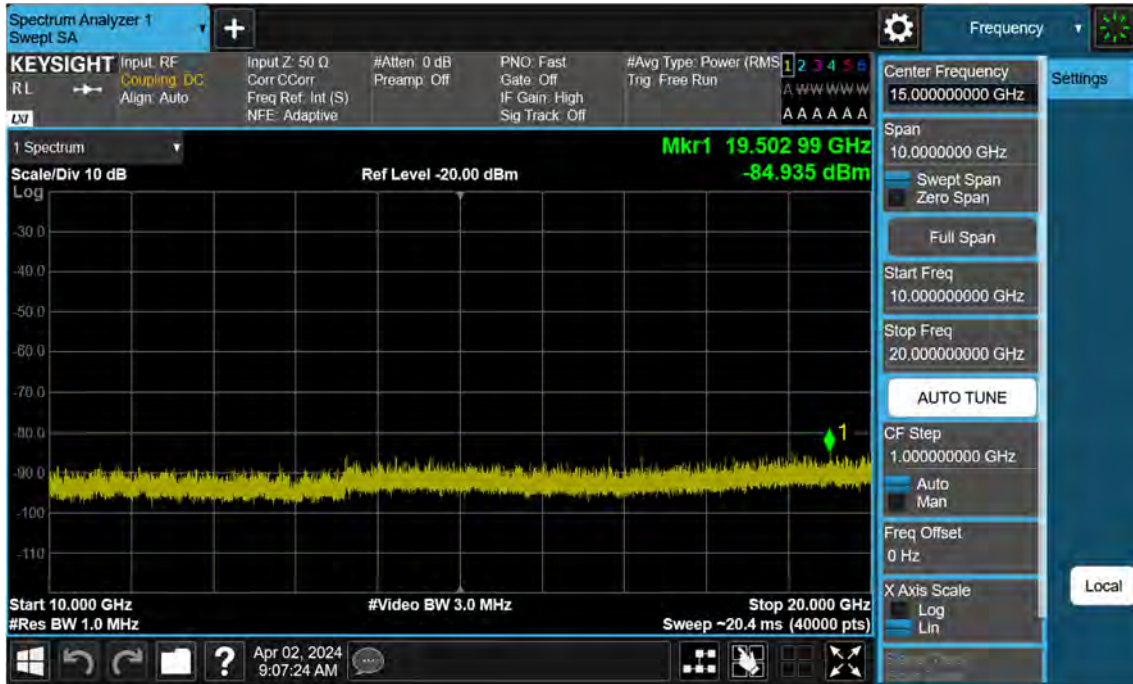


PCC 5 MHz Ch132504 RB1 Offset24, SCC 15 MHz Ch132597 RB1 Offset0



PCC 5 MHz Ch131997 RB1 Offset0, SCC 5 MHz Ch132045 RB1 Offset24




PCC 15 MHz Ch132398 RB1 Offset0, SCC 5 MHz Ch132491 RB1 Offset24

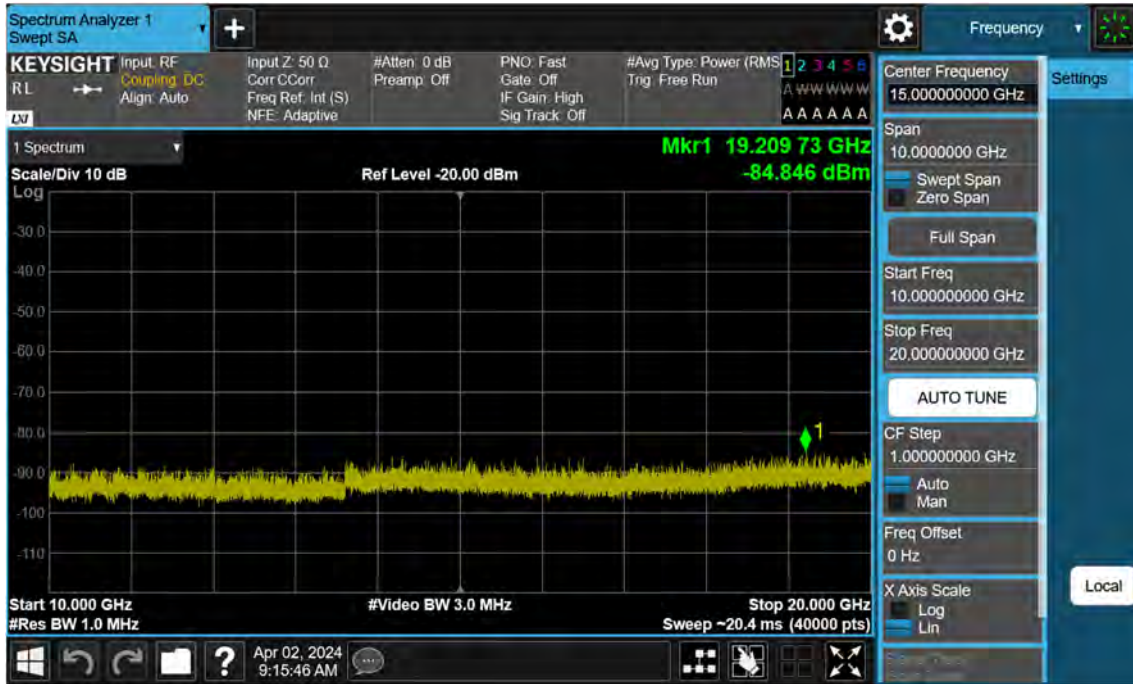




PCC 5 MHz Ch132504 RB1 Offset0, SCC 15 MHz Ch132597 RB1 Offset74

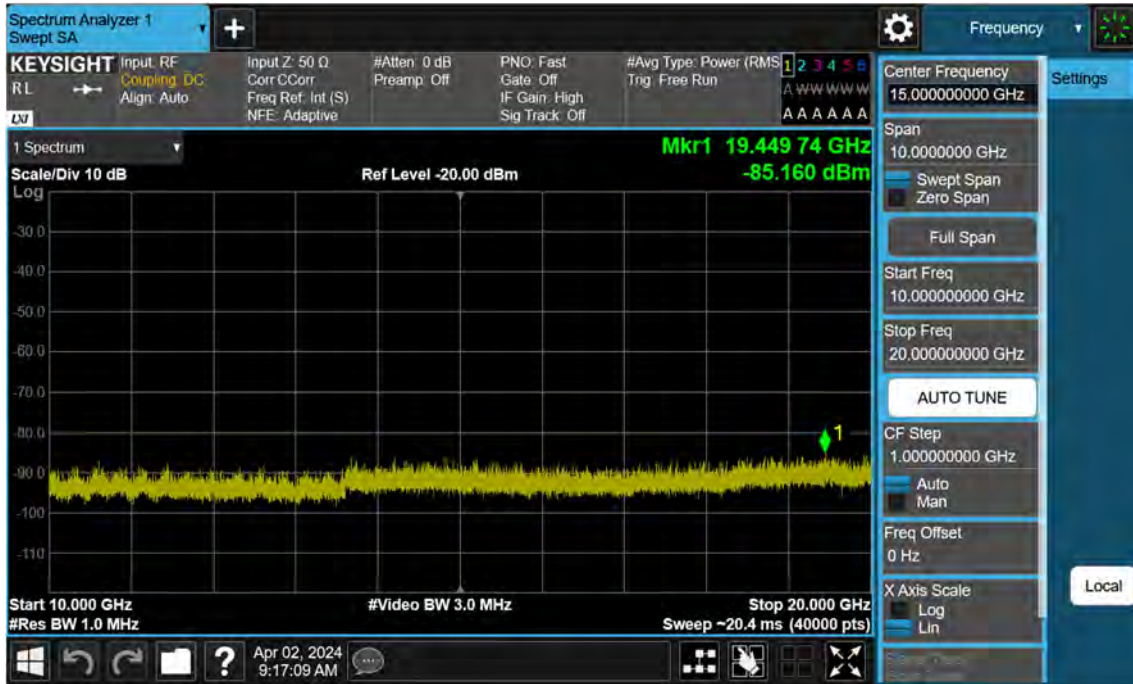


PCC 5 MHz Ch132000 RB25 Offset0, SCC 10 MHz Ch132072 RB50 Offset0

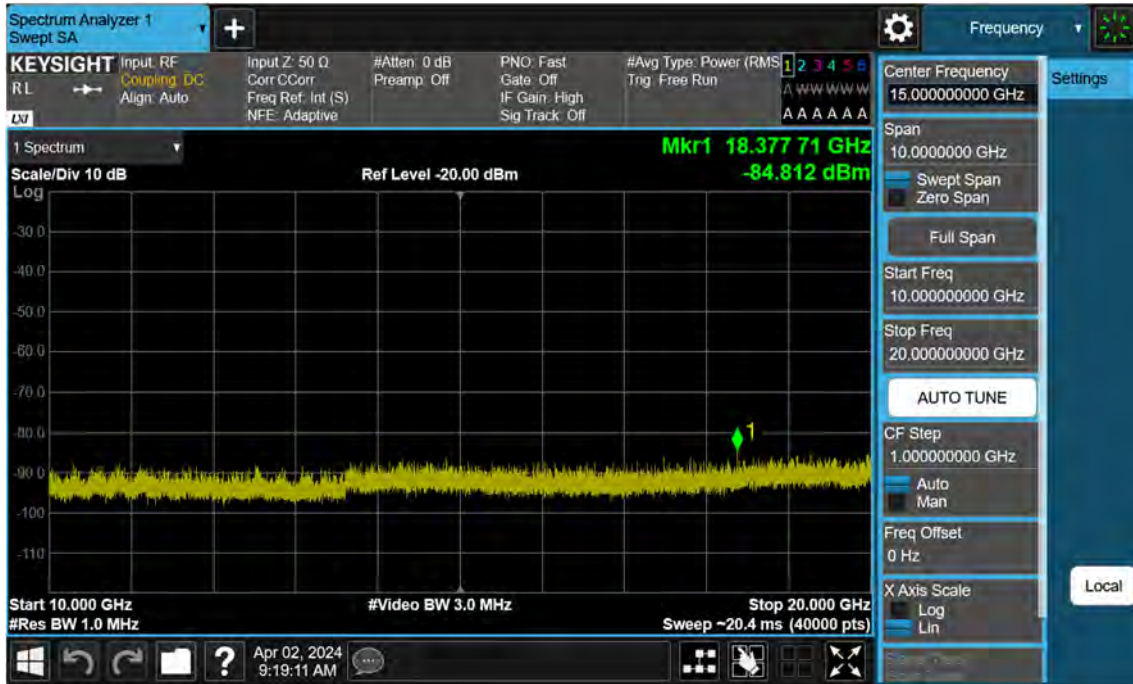

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0




PCC 5 MHz Ch132599 RB25 Offset0, SCC 5 MHz Ch132647 RB25 Offset0

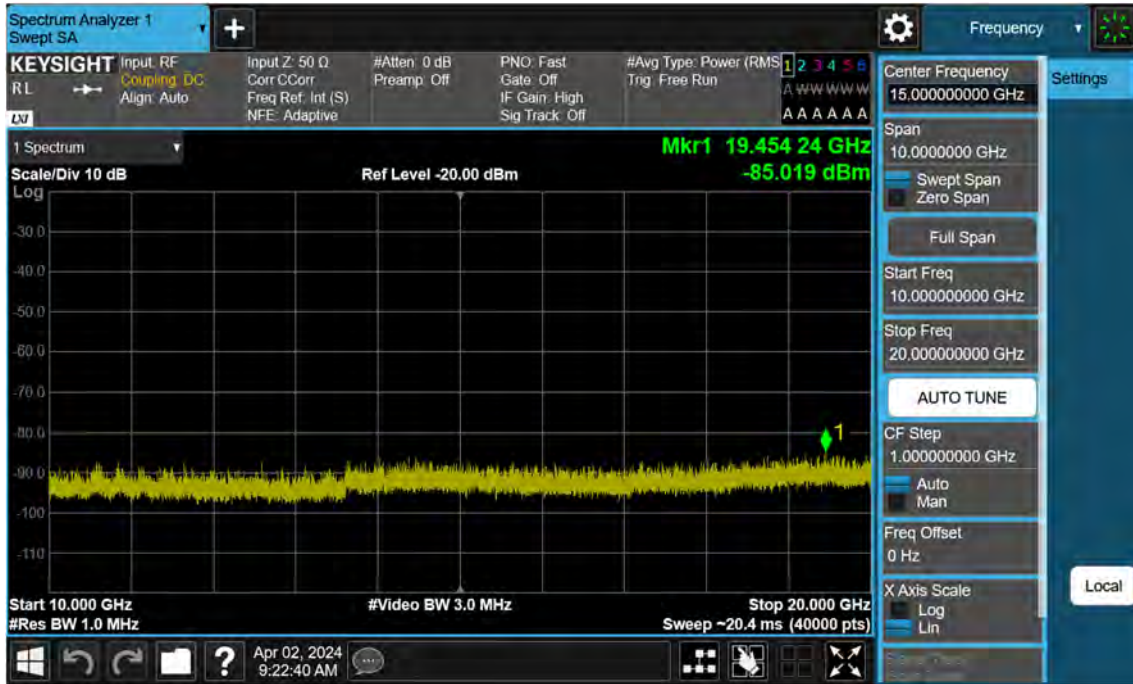

PCC 10 MHz Ch132022 RB50 Offset0, SCC 10 MHz Ch132121 RB50 Offset0




PCC 10 MHz Ch132523 RB50 Offset0, SCC 10 MHz Ch132622 RB50 Offset0

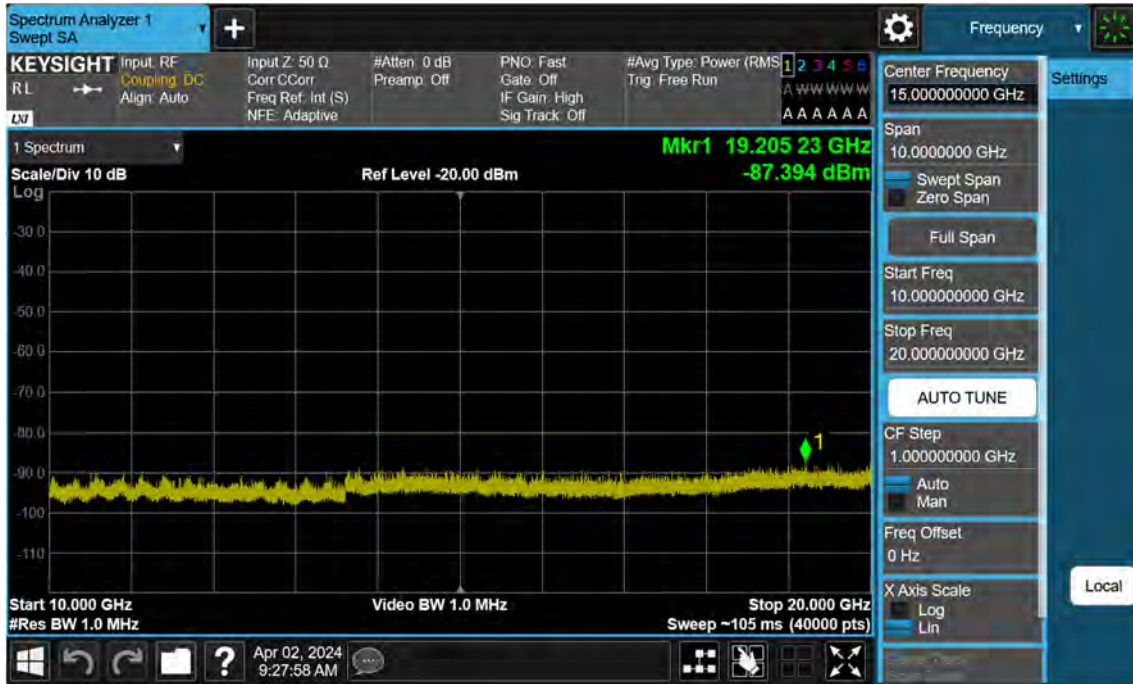


### 9.4 Channel Edge

Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74(1)

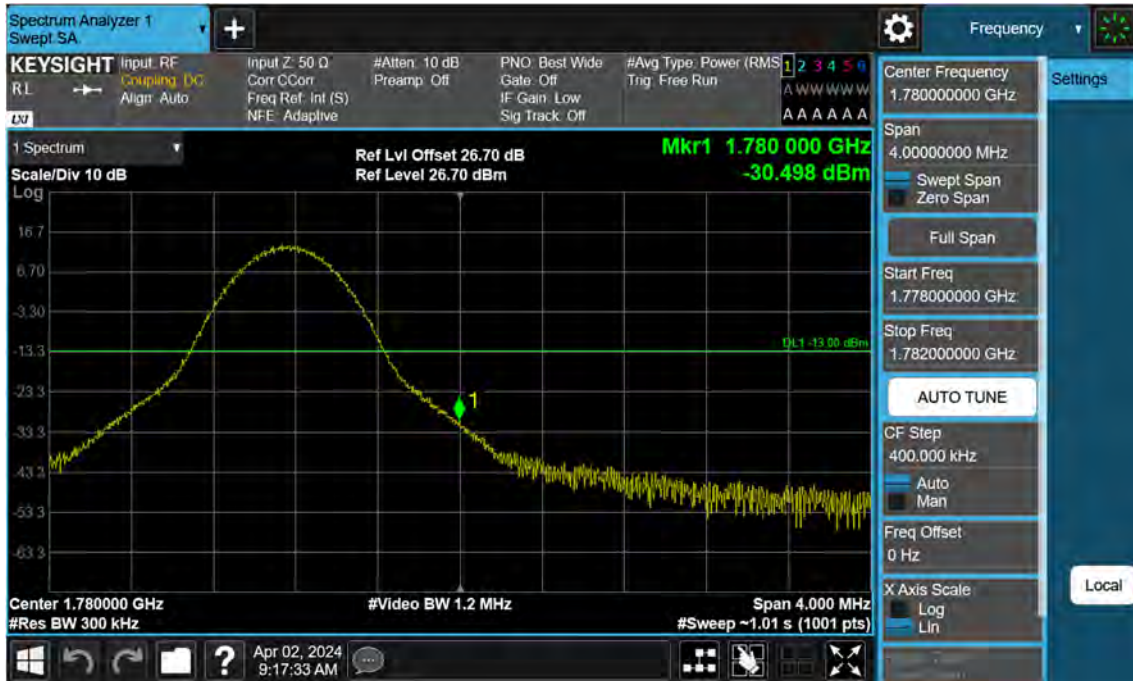


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset0 SCC 15 MHz Ch132597 RB1 Offset74(2)

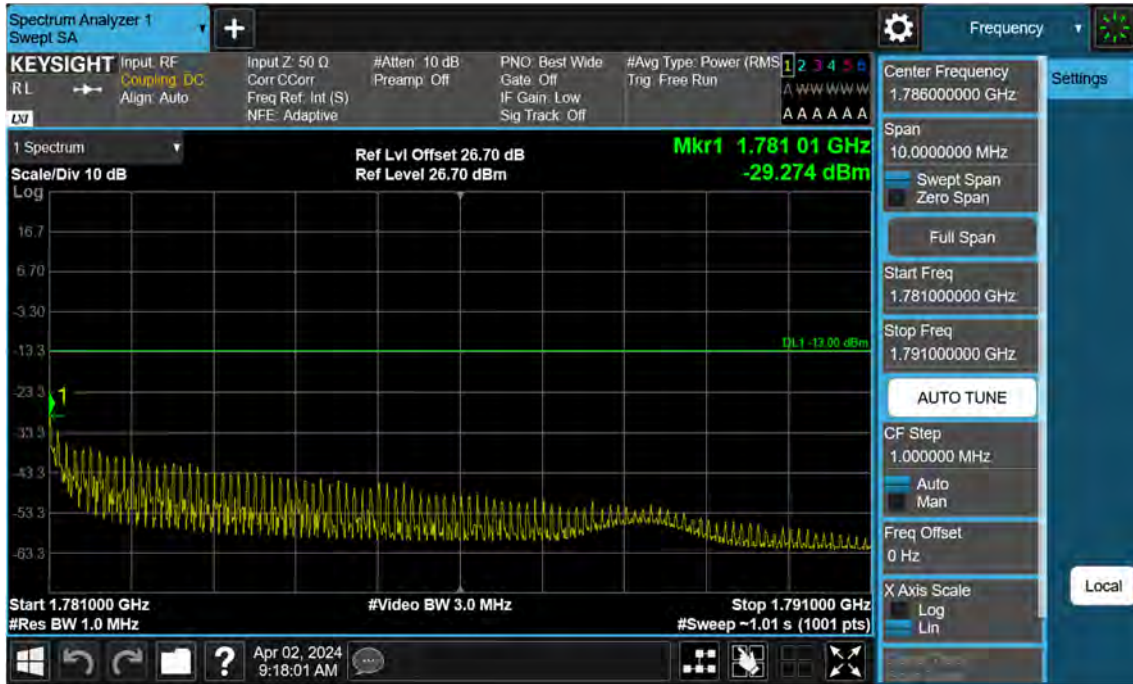




Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0(1)

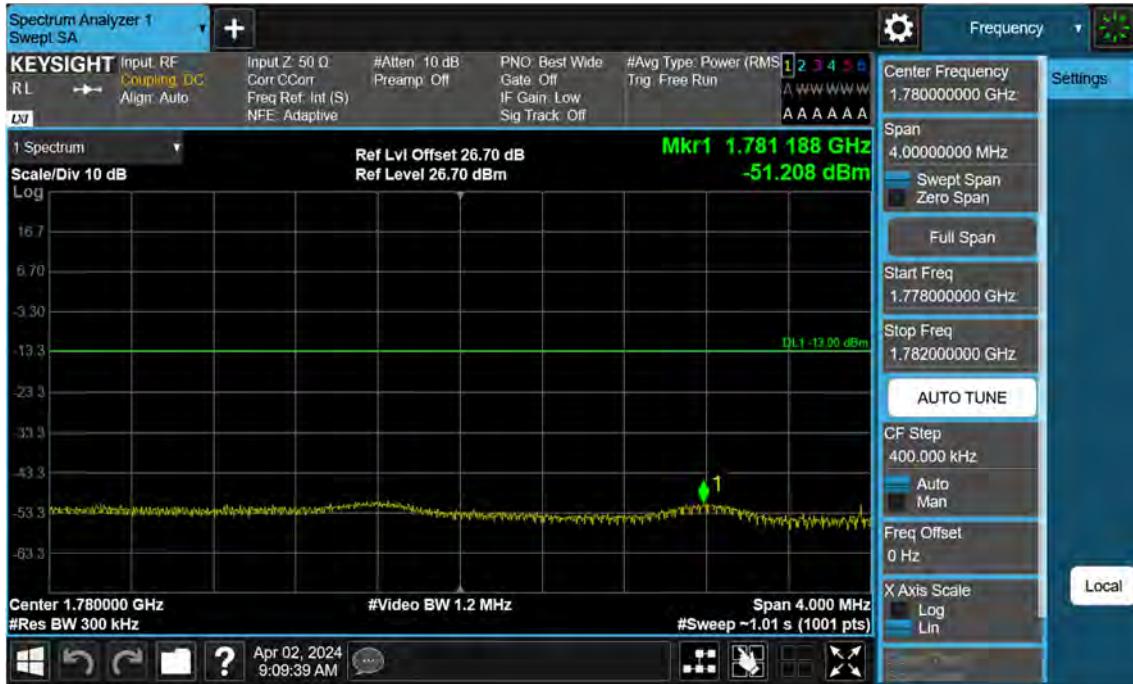


Highest Channel\_PCC 5 MHz Ch132504 RB1 Offset24 SCC 15 MHz Ch132597 RB1 Offset0(2)

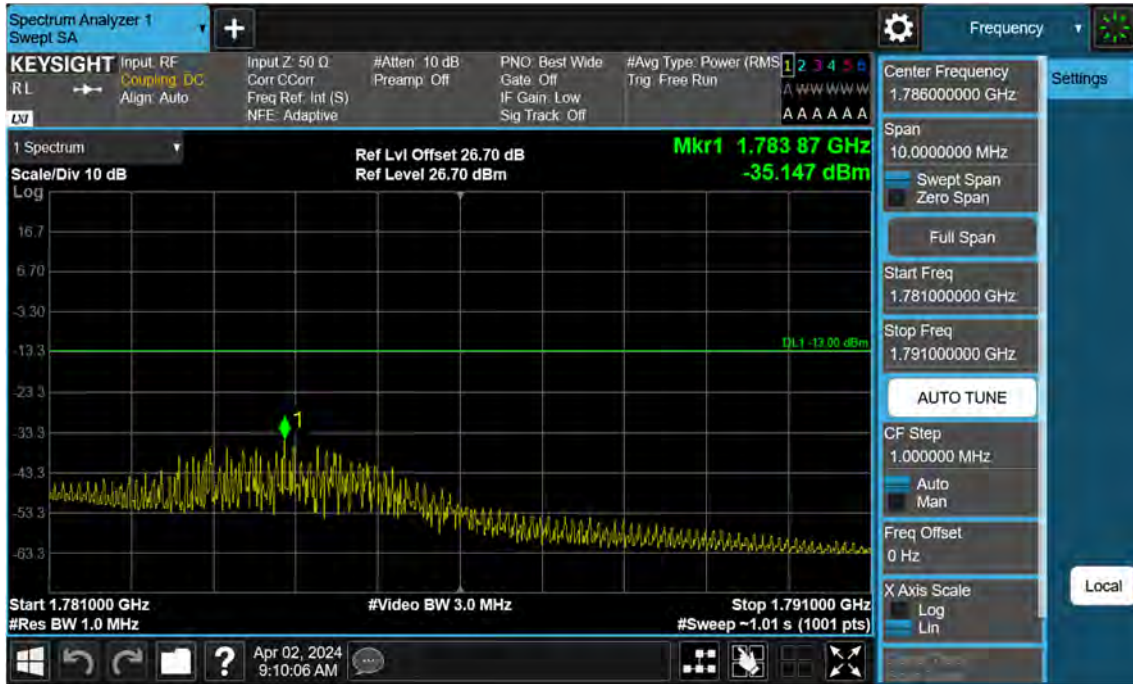


Highest Channel\_PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0(1)




Highest Channel\_PCC 5 MHz Ch132599 RB25 Offset0 SCC 5 MHz Ch132647 RB25 Offset0(2)

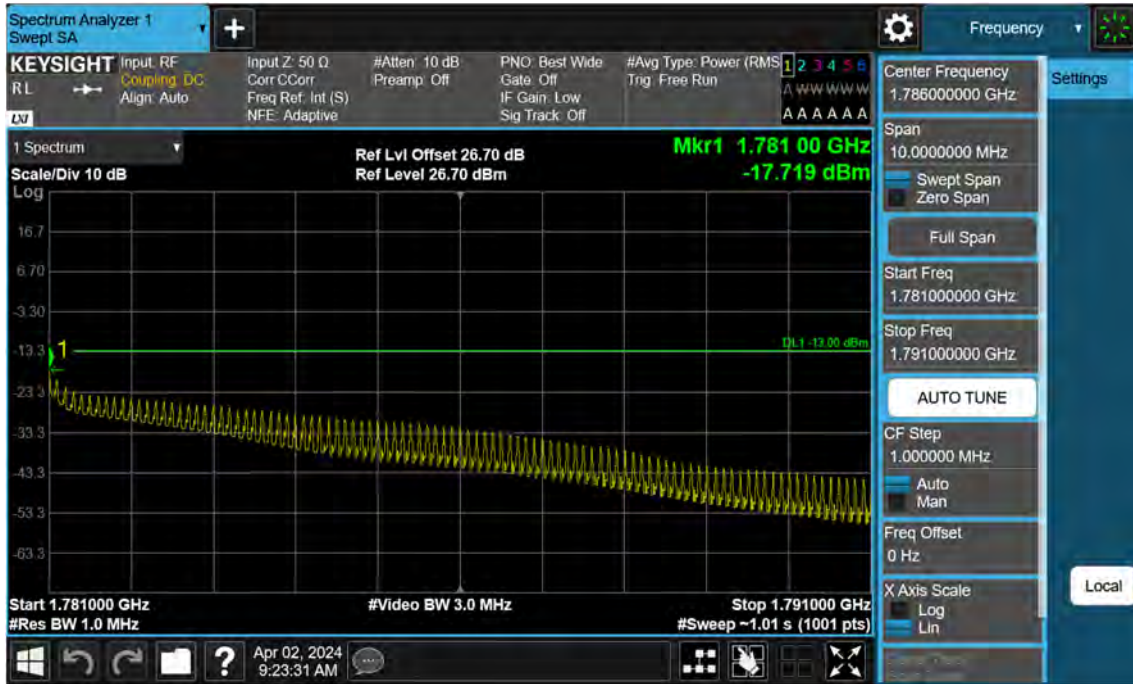


Highest Channel\_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(1)

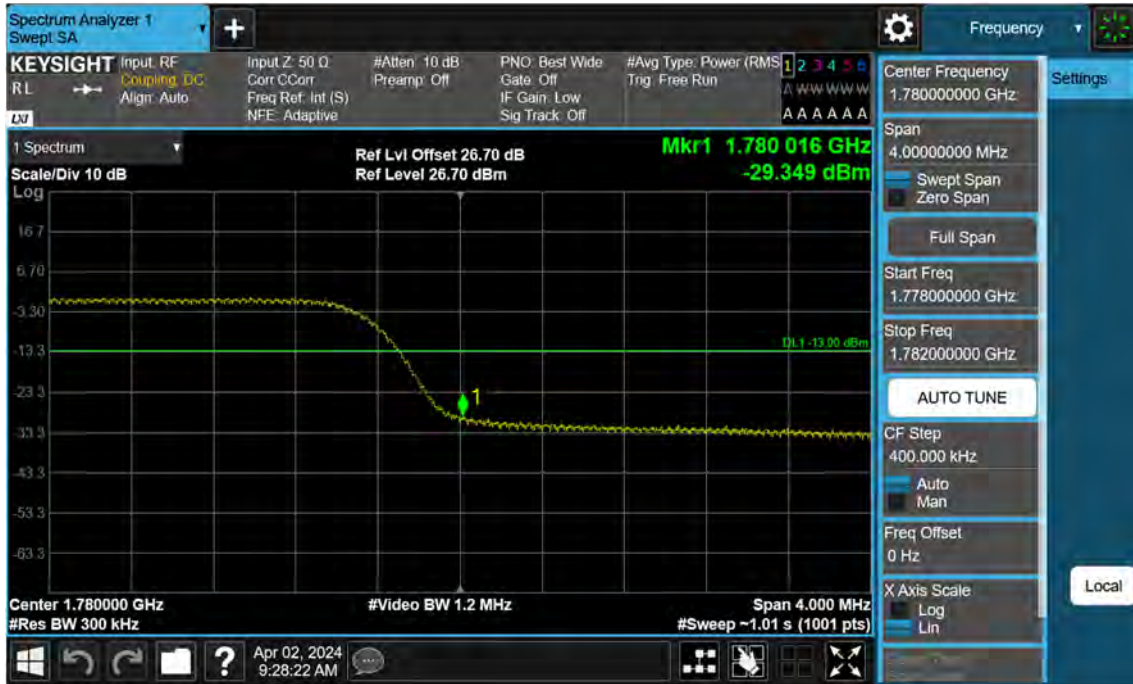


Highest Channel\_PCC 10 MHz Ch132523 RB50 Offset0 SCC 10 MHz Ch132622 RB50 Offset0(2)

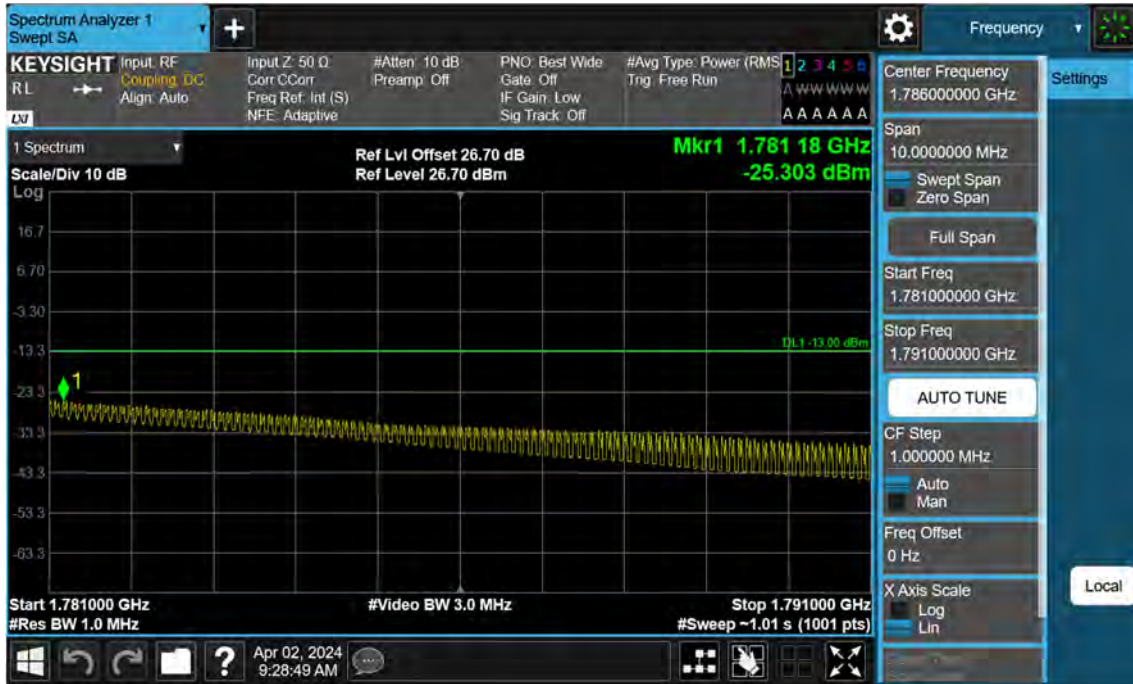

Lowest Channel\_PCC 5 MHz Ch131997 RB1 Offset24 SCC 5 MHz Ch132045 RB1 Offset0(1)

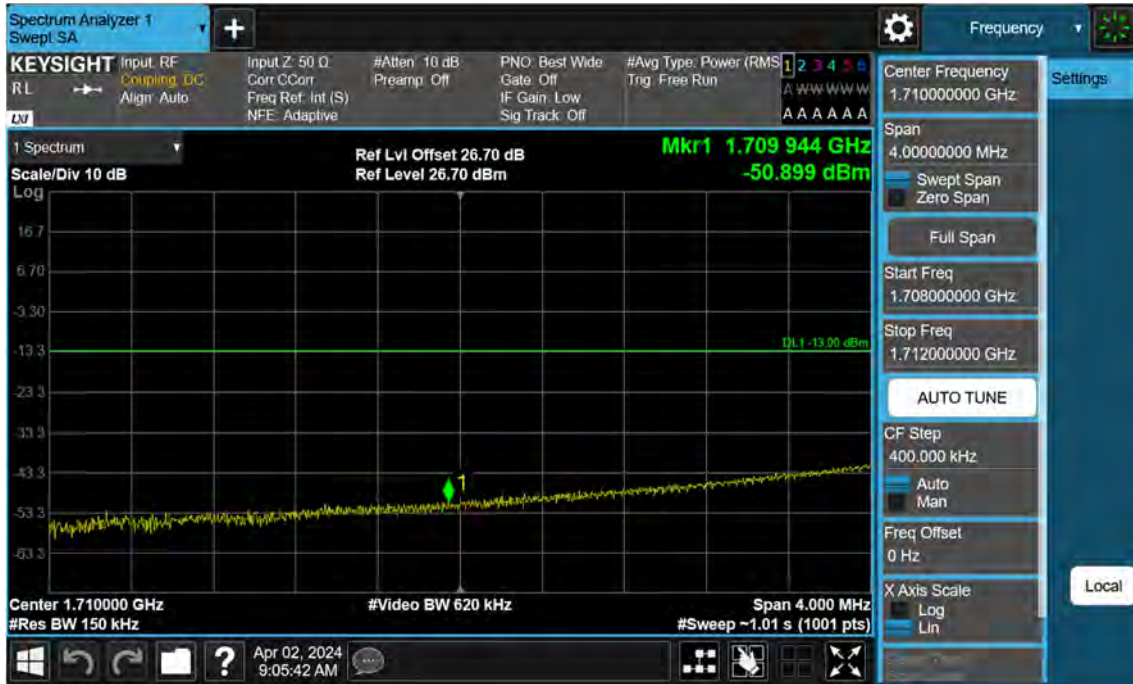


Lowest Channel\_PCC 5 MHz Ch131997 RB1 Offset24 SCC 5 MHz Ch132045 RB1 Offset0(2)

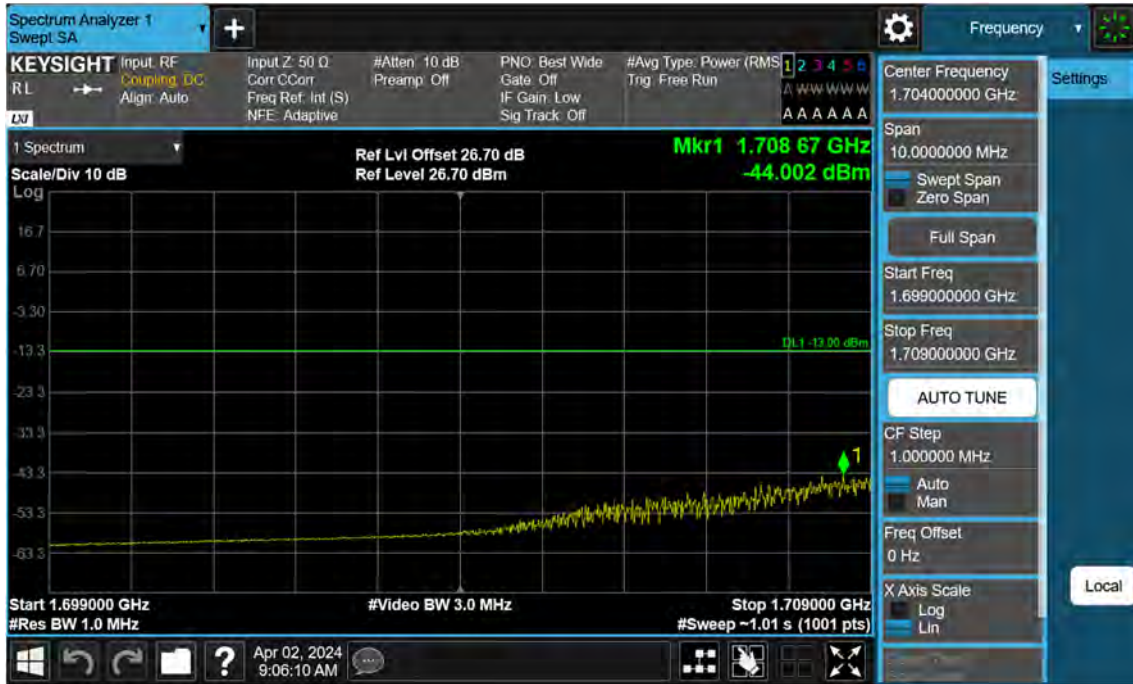





Lowest Channel\_PCC 5 MHz Ch132000 RB25 Offset0 SCC 10 MHz Ch132072 RB50 Offset0(1)

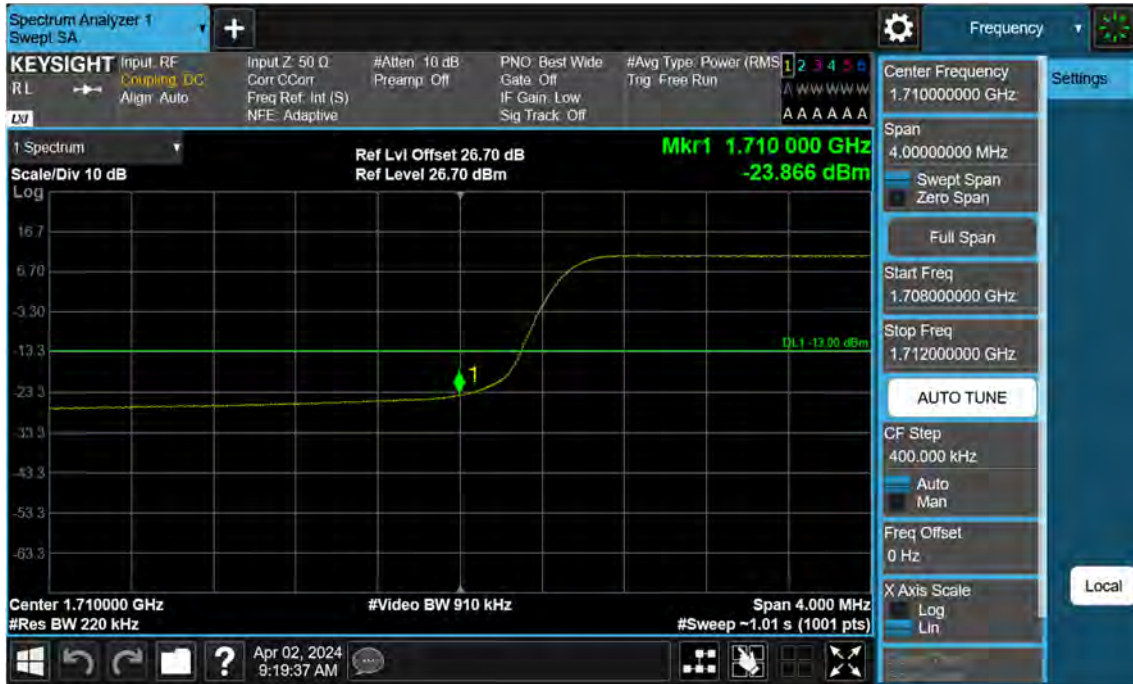


Lowest Channel\_PCC 5 MHz Ch132000 RB25 Offset0 SCC 10 MHz Ch132072 RB50 Offset0(2)

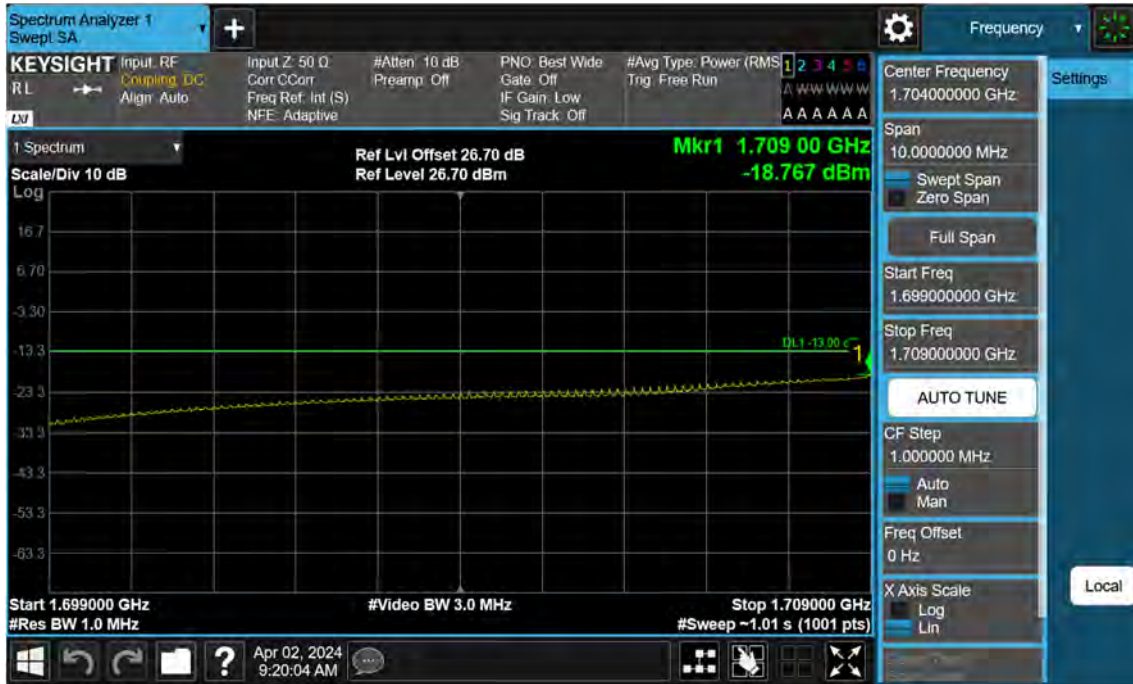


Lowest Channel\_PCC 5 MHz Ch132002 RB1 Offset24 SCC 15 MHz Ch132095 RB1 Offset0(1)

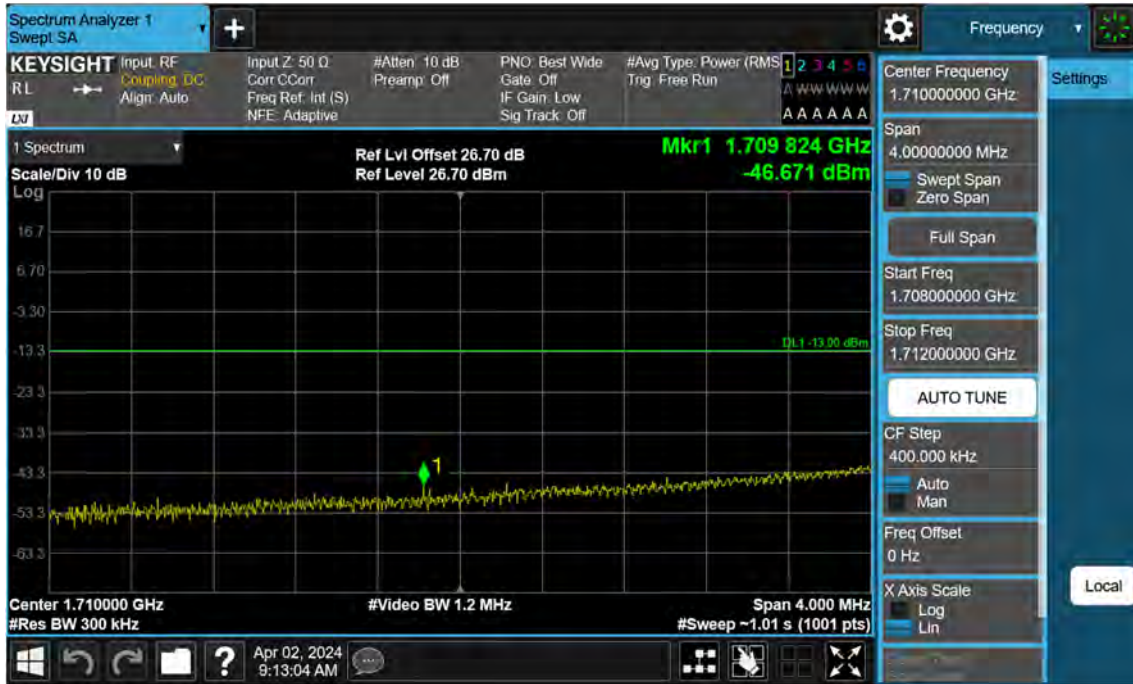


Lowest Channel\_PCC 5 MHz Ch132002 RB1 Offset24 SCC 15 MHz Ch132095 RB1 Offset0(2)

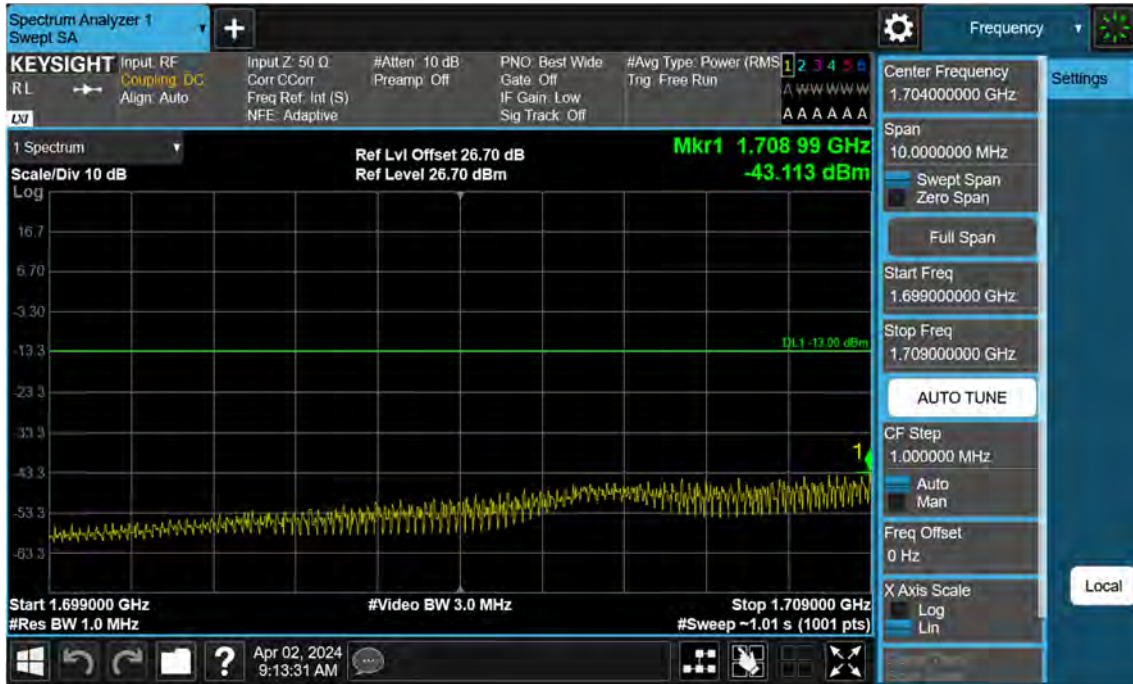

Lowest Channel\_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(1)

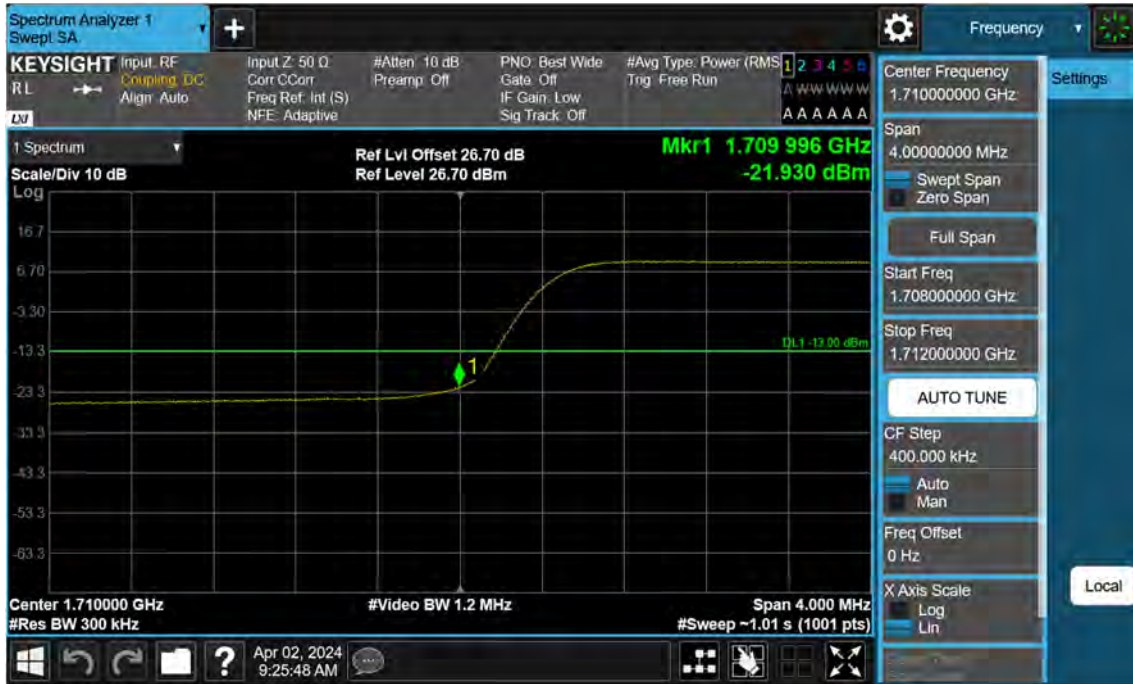

Lowest Channel\_PCC 10 MHz Ch132022 RB50 Offset0 SCC 10 MHz Ch132121 RB50 Offset0(2)

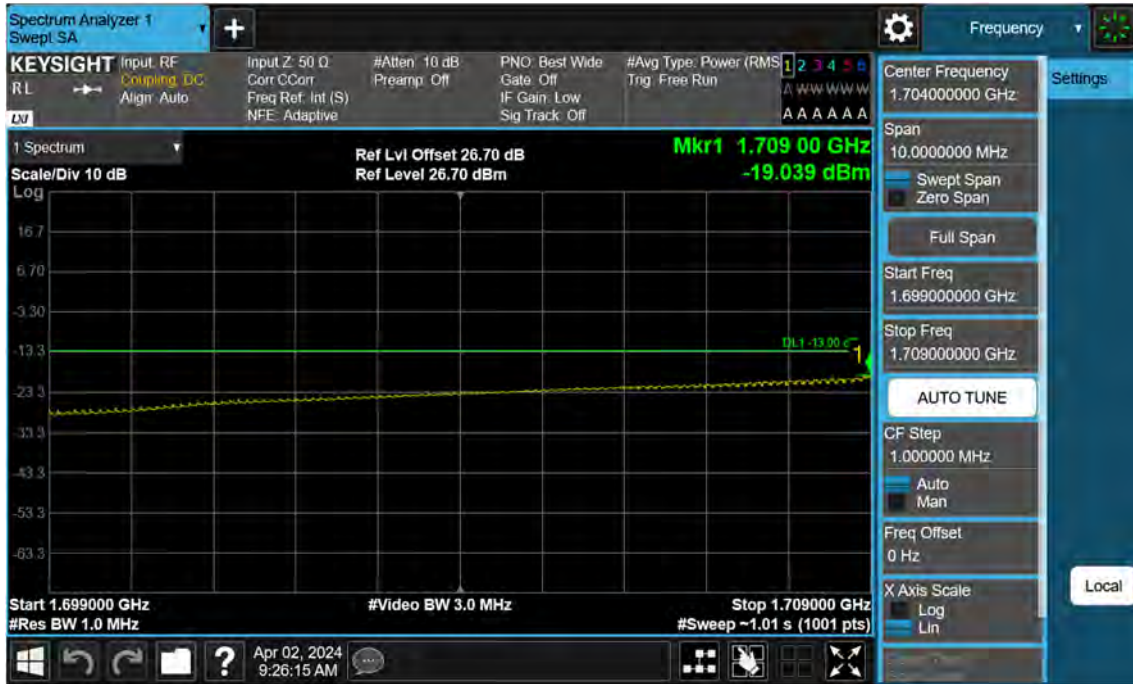

### 9.5 Frequency Stability / Variation Of Ambient Temperature

- ▣ PCC Channel: 131997
- ▣ PCC Frequency: 1712.5 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132045
- ▣ SCC Frequency: 1717.3 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.033	-0.036	1712.49999	1717.29994
100 %		-30	0.031	0.036	1712.50004	1717.29998
100 %		-20	-0.045	-0.044	1712.49985	1717.29989
100 %		-10	0.029	0.038	1712.49998	1717.29999
100 %		0	0.037	-0.046	1712.50007	1717.29992
100 %		10	-0.039	-0.042	1712.49985	1717.29987
100 %		30	0.034	0.030	1712.49997	1717.30000
100 %		40	-0.036	0.036	1712.49990	1717.30003
100 %		50	0.026	-0.044	1712.50002	1717.29990
Batt. Endpoint		3.300	20	0.028	0.028	1712.50006

- ▣ PCC Channel: 132022
- ▣ PCC Frequency: 1715.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132094
- ▣ SCC Frequency: 1722.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.041	0.021	1715.00002	1722.20000
100 %		-30	0.025	0.024	1714.99997	1722.19996
100 %		-20	0.028	-0.043	1714.99995	1722.19992
100 %		-10	0.036	0.039	1715.00006	1722.19997
100 %		0	0.029	0.028	1715.00002	1722.19997
100 %		10	0.042	0.034	1715.00006	1722.19999
100 %		30	0.035	0.031	1714.99999	1722.19998
100 %		40	0.036	0.027	1714.99998	1722.19999
100 %		50	0.042	-0.031	1715.00006	1722.19993
Batt. Endpoint	3.300	20	0.025	-0.036	1715.00002	1722.19991



- ▣ PCC Channel: 132047
- ▣ PCC Frequency: 1717.5 MHz
- ▣ PCC BandWidth: 15 MHz
- ▣ SCC Channel: 132140
- ▣ SCC Frequency: 1726.8 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.035	0.026	1717.50004	1726.80004
100 %		-30	0.035	0.041	1717.50004	1726.80007
100 %		-20	-0.048	-0.051	1717.49985	1726.79988
100 %		-10	0.022	-0.034	1717.50005	1726.79986
100 %		0	-0.047	-0.040	1717.49985	1726.79986
100 %		10	0.024	0.032	1717.50001	1726.80003
100 %		30	0.037	0.042	1717.50002	1726.80000
100 %		40	0.040	0.022	1717.50002	1726.80004
100 %		50	-0.035	0.038	1717.49985	1726.79998
Batt. Endpoint	3.300	20	0.024	0.037	1717.49997	1726.80000

- ▣ PCC Channel: 132599
- ▣ PCC Frequency: 1772.7 MHz
- ▣ PCC BandWidth: 5 MHz
- ▣ SCC Channel: 132647
- ▣ SCC Frequency: 1777.5 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.021	-0.035	1772.70005	1777.49987
100 %		-30	0.046	0.040	1772.70002	1777.50006
100 %		-20	0.033	0.037	1772.69999	1777.50003
100 %		-10	-0.032	-0.047	1772.69994	1777.49991
100 %		0	0.030	-0.036	1772.69998	1777.49994
100 %		10	-0.042	0.036	1772.69992	1777.50000
100 %		30	0.027	-0.030	1772.69999	1777.49994
100 %		40	-0.042	0.040	1772.69992	1777.50004
100 %		50	-0.043	0.036	1772.69991	1777.49997
Batt. Endpoint	3.300	20	0.025	-0.051	1772.69999	1777.49992

- ▣ PCC Channel: 132572
- ▣ PCC Frequency: 1770.0 MHz
- ▣ PCC BandWidth: 10 MHz
- ▣ SCC Channel: 132644
- ▣ SCC Frequency: 1777.2 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.041	-0.031	1769.99999	1777.19988
100 %		-30	0.030	-0.049	1770.00004	1777.19987
100 %		-20	-0.045	0.039	1769.99991	1777.20002
100 %		-10	0.031	-0.046	1770.00003	1777.19992
100 %		0	-0.039	-0.053	1769.99990	1777.19987
100 %		10	0.031	-0.051	1769.99998	1777.19984
100 %		30	0.041	0.032	1770.00006	1777.19998
100 %		40	0.026	0.034	1770.00000	1777.20005
100 %		50	-0.033	-0.047	1769.99994	1777.19983
Batt. Endpoint	3.300	20	-0.046	0.029	1769.99983	1777.20004

- ▣ PCC Channel: 132549
- ▣ PCC Frequency: 1767.7 MHz
- ▣ PCC BandWidth: 15 MHz
- ▣ SCC Channel: 132642
- ▣ SCC Frequency: 1777.0 MHz
- ▣ SCC BandWidth: 5 MHz
- ▣ Voltage : 3.880 VDC
- ▣ LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	PPM		Frequency Error (MHz)	
			PCC	SCC	PCC	SCC
100 %	3.880	+20(Ref)	0.029	0.035	1767.69996	1777.00003
100 %		-30	-0.037	0.031	1767.69986	1777.00003
100 %		-20	0.031	-0.050	1767.70002	1776.99991
100 %		-10	-0.042	0.026	1767.69989	1777.00003
100 %		0	-0.043	0.026	1767.69986	1777.00004
100 %		10	-0.035	-0.047	1767.69992	1776.99983
100 %		30	-0.035	-0.039	1767.69986	1776.99991
100 %		40	-0.047	0.031	1767.69988	1776.99996
100 %		50	-0.053	0.041	1767.69992	1777.00004
Batt. Endpoint		3.300	20	0.040	-0.046	1767.69999

### 9.6 Radiated Spurious Emissions

- ▣ PCC Channel : 132022 (1715.0 MHz)
- ▣ PCC BW(MHz) : 10
- ▣ PCC RB/ RB Offset : 1/ 49
- ▣ SCC Channel : 132094 (1722.2 MHz)
- ▣ SCC BW(MHz) : 5
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 437.20	-51.02	12.40	-57.14	3.14	V	-47.88
5 155.80	-59.35	12.42	-57.42	3.81	H	-48.82
6 874.40	-58.68	11.84	-51.80	4.51	H	-44.47

- ▣ PCC Channel : 132353 (1748.1 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132446 (1757.4 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 505.50	-52.68	12.34	-58.90	3.11	V	-49.67
5 258.25	-56.18	12.99	-55.86	3.83	H	-46.70
7 011.00	-59.14	11.26	-51.16	4.56	V	-44.46

- ▣ PCC Channel : 132504 (1763.2 MHz)
- ▣ PCC BW(MHz) : 5
- ▣ PCC RB/ RB Offset : 1/ 24
- ▣ SCC Channel : 132597 (1772.5 MHz)
- ▣ SCC BW(MHz) : 15
- ▣ SCC RB/ RB Offset : 1/ 0
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: -13.0 dBm

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)
3 535.70	-52.63	12.34	-58.68	3.17	H	-49.51
5 303.55	-58.97	13.07	-58.20	3.95	V	-49.08
7 071.40	-59.55	10.97	-50.71	4.55	H	-44.29

### 9.7 Occupied Bandwidth

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/0	5	132446	1757.4	QPSK	25/0	9.2766
5	132375	1750.3	QPSK	25/0	10	132447	1757.5	QPSK	50/0	13.844
10	132397	1752.5	QPSK	50/0	5	132469	1759.7	QPSK	25/0	13.873
5	132353	1748.1	QPSK	25/0	15	132446	1757.4	QPSK	75/0	18.260
15	132398	1752.6	QPSK	75/0	5	132491	1761.9	QPSK	25/0	18.274
10	132373	1750.1	QPSK	50/0	10	132472	1760.0	QPSK	50/0	18.756

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/0	5	132446	1757.4	16QAM	25/0	9.2271
5	132375	1750.3	16QAM	25/0	10	132447	1757.5	16QAM	50/0	13.870
10	132397	1752.5	16QAM	50/0	5	132469	1759.7	16QAM	25/0	13.928
5	132353	1748.1	16QAM	25/0	15	132446	1757.4	16QAM	75/0	18.141
15	132398	1752.6	16QAM	75/0	5	132491	1761.9	16QAM	25/0	18.252
10	132373	1750.1	16QAM	50/0	10	132472	1760.0	16QAM	50/0	18.772



PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/0	5	132446	1757.4	64QAM	25/0	9.2618
5	132375	1750.3	64QAM	25/0	10	132447	1757.5	64QAM	50/0	13.843
10	132397	1752.5	64QAM	50/0	5	132469	1759.7	64QAM	25/0	13.894
5	132353	1748.1	64QAM	25/0	15	132446	1757.4	64QAM	75/0	18.127
15	132398	1752.6	64QAM	75/0	5	132491	1761.9	64QAM	25/0	18.225
10	132373	1750.1	64QAM	50/0	10	132472	1760.0	64QAM	50/0	18.808

PCC					SCC					Data (MHz)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/0	5	132446	1757.4	256QAM	25/0	9.2640
5	132375	1750.3	256QAM	25/0	10	132447	1757.5	256QAM	50/0	13.903
10	132397	1752.5	256QAM	50/0	5	132469	1759.7	256QAM	25/0	13.907
5	132353	1748.1	256QAM	25/0	15	132446	1757.4	256QAM	75/0	18.166
15	132398	1752.6	256QAM	75/0	5	132491	1761.9	256QAM	25/0	18.235
10	132373	1750.1	256QAM	50/0	10	132472	1760.0	256QAM	50/0	18.790

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(QPSK)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(64QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(256QAM)



## 9.8 Peak- to- Average Ratio

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	QPSK	25/ 0	5	132446	1757.4	QPSK	25/ 0	5.31
5	132375	1750.3	QPSK	25/ 0	10	132447	1757.5	QPSK	50/ 0	5.33
10	132397	1752.5	QPSK	50/ 0	5	132469	1759.7	QPSK	25/ 0	5.28
5	132353	1748.1	QPSK	25/ 0	15	132446	1757.4	QPSK	75/ 0	5.43
15	132398	1752.6	QPSK	75/ 0	5	132491	1761.9	QPSK	25/ 0	5.33
10	132373	1750.1	QPSK	50/ 0	10	132472	1760.0	QPSK	50/ 0	5.35

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	16QAM	25/ 0	5	132446	1757.4	16QAM	25/ 0	6.26
5	132375	1750.3	16QAM	25/ 0	10	132447	1757.5	16QAM	50/ 0	6.14
10	132397	1752.5	16QAM	50/ 0	5	132469	1759.7	16QAM	25/ 0	6.32
5	132353	1748.1	16QAM	25/ 0	15	132446	1757.4	16QAM	75/ 0	6.10
15	132398	1752.6	16QAM	75/ 0	5	132491	1761.9	16QAM	25/ 0	6.28
10	132373	1750.1	16QAM	50/ 0	10	132472	1760.0	16QAM	50/ 0	6.25


PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	64QAM	25/0	5	132446	1757.4	64QAM	25/0	6.41
5	132375	1750.3	64QAM	25/0	10	132447	1757.5	64QAM	50/0	6.39
10	132397	1752.5	64QAM	50/0	5	132469	1759.7	64QAM	25/0	6.41
5	132353	1748.1	64QAM	25/0	15	132446	1757.4	64QAM	75/0	6.29
15	132398	1752.6	64QAM	75/0	5	132491	1761.9	64QAM	25/0	6.43
10	132373	1750.1	64QAM	50/0	10	132472	1760.0	64QAM	50/0	6.54

PCC					SCC					Data (dBm)
BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	BW [MHz]	Ch	Freq [MHz]	Mod	RB/Offset	
5	132398	1752.6	256QAM	25/0	5	132446	1757.4	256QAM	25/0	6.73
5	132375	1750.3	256QAM	25/0	10	132447	1757.5	256QAM	50/0	6.62
10	132397	1752.5	256QAM	50/0	5	132469	1759.7	256QAM	25/0	6.67
5	132353	1748.1	256QAM	25/0	15	132446	1757.4	256QAM	75/0	6.66
15	132398	1752.6	256QAM	75/0	5	132491	1761.9	256QAM	25/0	6.71
10	132373	1750.1	256QAM	50/0	10	132472	1760.0	256QAM	50/0	6.87

Note:

In order to simplify the report, attached plots were only widest bandwidth(10+10).

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(QPSK)

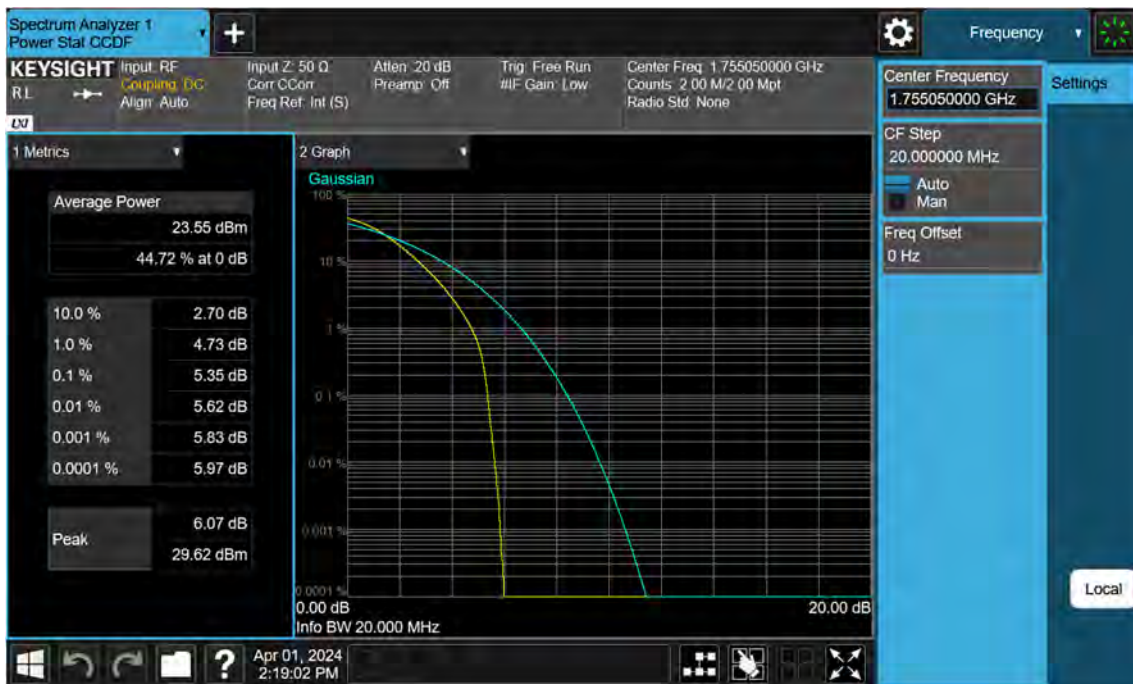




PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(16QAM)



PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(64QAM)

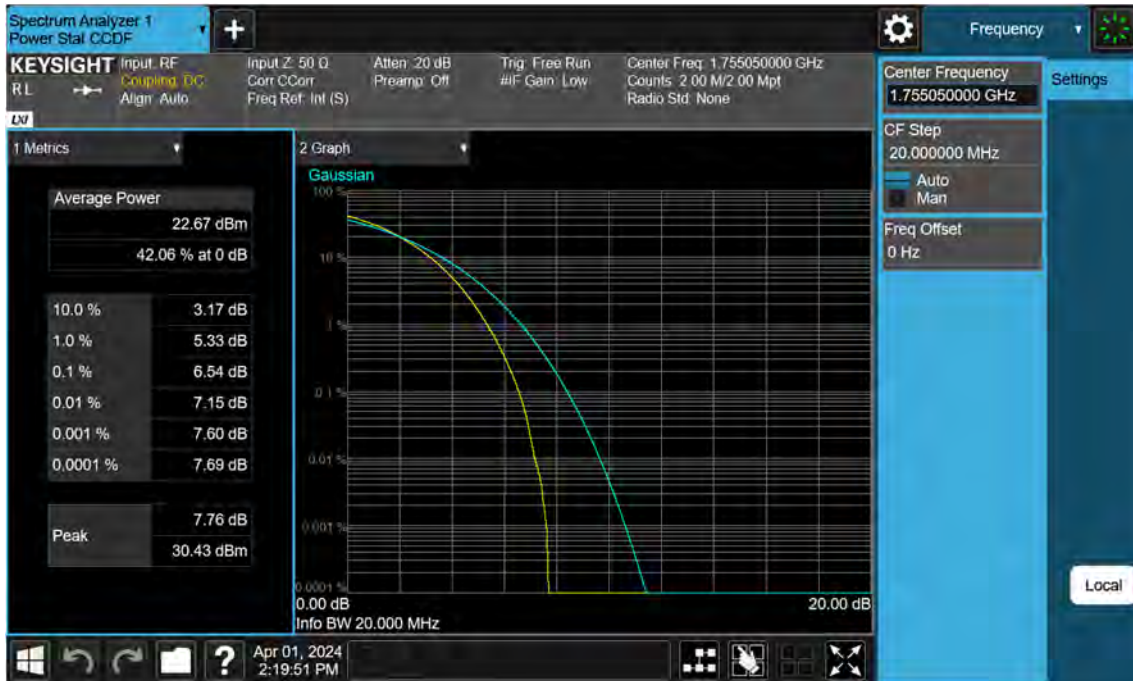

PCC 10 MHz Ch132373 RB50 Offset0, SCC 10 MHz Ch132472 RB50 Offset0\_(256QAM)



## 10. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2404-FC040-P