

# TEST REPORT

FCC Sub6 n70 Test for SM-F741U  
Certification

**APPLICANT**  
SAMSUNG Electronics Co., Ltd.

**REPORT NO.**  
HCT-RF-2404-FC034-R1

**DATE OF ISSUE**  
May 3, 2024

**Tested by**  
Jae Ryang Do



**Technical Manager**  
Jong Seok Lee



**HCT CO., LTD.**  
*Bongjai Huh*  
BongJai Huh / CEO



**HCT CO.,LTD.**

2-6, 73, 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA  
Tel. +82 31 645 6300 Fax. +82 31 645 6401

**TEST  
REPORT**

**REPORT NO.**  
HCT-RF-2404-FC034-R1

**DATE OF ISSUE**  
May 03, 2024

**Additional Model**  
SM-F741U1

**Applicant**      **SAMSUNG Electronics Co., Ltd.**  
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Product Name**      Mobile Phone  
**Model Name**      SM-F741U

**Date of Test**      February 27, 2024 ~ April 19, 2024

**FCC ID**      A3LSMF741U

**Location of Test**       Permanent Testing Lab     On Site Testing  
(Address: 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 Republic of Korea)

**FCC Classification:**      PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):**      § 27

## REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 26, 2024	Initial Release
1	May 03, 2024	Revised the date of test (Page 2.)

## Notice

---

### Content

---

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section § 2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

The results shown in this test report only apply to the sample(s), as received, provided by the applicant, unless otherwise stated.

The test results have only been applied with the test methods required by the standard(s).

When confirmation of authenticity of this test report is required, please contact [www.hct.co.kr](http://www.hct.co.kr)

The test results in this test report are not associated with the ((KS Q) ISO/IEC 17025) accreditation by KOLAS (Korea Laboratory Accreditation Scheme) / A2LA (American Association for Laboratory Accreditation) that are under the ILAC (International Laboratory Accreditation Cooperation) Mutual Recognition Agreement (MRA).

---

## CONTENTS

1. GENERAL INFORMATION .....	5
1.1. MAXIMUM OUTPUT POWER.....	6
2. INTRODUCTION .....	7
2.1. DESCRIPTION OF EUT .....	7
2.2. MEASURING INSTRUMENT CALIBRATION.....	7
2.3. TEST FACILITY .....	7
3. DESCRIPTION OF TESTS.....	8
3.1 TEST PROCEDURE.....	8
3.2 RADIATED POWER .....	9
3.3 RADIATED SPURIOUS EMISSIONS .....	10
3.4 PEAK- TO- AVERAGE RATIO.....	11
3.5 OCCUPIED BANDWIDTH. ....	13
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	14
3.7 BAND EDGE .....	15
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	17
3.9 WORST CASE(RADIATED TEST).....	18
3.10 WORST CASE(CONDUCTED TEST) .....	19
4. LIST OF TEST EQUIPMENT .....	20
5. MEASUREMENT UNCERTAINTY .....	21
6. SUMMARY OF TEST RESULTS.....	22
7. SAMPLE CALCULATION .....	23
8. TEST DATA (ANT A) .....	25
8.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	25
8.2 RADIATED SPURIOUS EMISSIONS .....	28
8.3 PEAK-TO-AVERAGE RATIO.....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS.....	31
8.6 BAND EDGE .....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	32
9. TEST DATA (ANT I) .....	35
9.1 EQUIVALENT ISOTROPIC RADIATED POWER .....	35
9.2 RADIATED SPURIOUS EMISSIONS .....	38
9.3 PEAK-TO-AVERAGE RATIO.....	39
9.4 OCCUPIED BANDWIDTH .....	40
9.5 CONDUCTED SPURIOUS EMISSIONS.....	41
9.6 BAND EDGE .....	41
9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE.....	42
10. TEST DATA (Ant I, Ant A) .....	45
10.1 UPLINK CARRIER AGGREGATION .....	45
10.1.1 RADIATED SPURIOUS EMISSIONS .....	45
11. TEST PLOTS (ANT A) .....	46
12. TEST PLOTS (ANT I) .....	109
13. ANNEX A_ TEST SETUP PHOTO .....	172

## MEASUREMENT REPORT

### 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMF741U
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§ 27
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-F741U
<b>Additional Model(s)</b>	SM-F741U1
<b>SCS(kHz):</b>	15
<b>Bandwidth(MHz):</b>	5, 10, 15
<b>Waveform:</b>	CP-OFDM, DFT-S-OFDM
<b>Modulation:</b>	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
<b>Tx Frequency:</b>	1697.5 MHz – 1707.5 MHz (Sub6 n70(5 MHz)) 1700.0 MHz – 1705.0 MHz (Sub6 n70(10 MHz)) 1705.5 MHz (Sub6 n70(15 MHz))
<b>Date(s) of Tests:</b>	February 27, 2024 ~ April 19, 2024
<b>Serial number:</b>	Radiated : R3CX20KJSJW Conducted : 7B5599BDA3507ECE (ANT A) 7b5599c1a7507ece (ANT I)

**1.1. MAXIMUM OUTPUT POWER**
**ANT A**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n70 (5)	1697.5 - 1707.5	4M47G7D	PI/2 BPSK	0.113	20.54
		4M54G7D	QPSK	0.113	20.53
		4M50W7D	16QAM	0.093	19.69
		4M51W7D	64QAM	0.068	18.32
		4M50W7D	256QAM	0.041	16.09
Sub6 n70 (10)	1700.0 - 1705.0	9M02G7D	PI/2 BPSK	0.138	21.39
		8M95G7D	QPSK	0.136	21.32
		9M01W7D	16QAM	0.110	20.41
		8M97W7D	64QAM	0.077	18.89
		9M05W7D	256QAM	0.045	16.52
Sub6 n70 (15)	1702.5	13M5G7D	PI/2 BPSK	0.137	21.36
		13M5G7D	QPSK	0.136	21.34
		13M5W7D	16QAM	0.111	20.47
		13M5W7D	64QAM	0.081	19.06
		13M5W7D	256QAM	0.046	16.59

**ANT I**

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
Sub6 n70 (5)	1697.5 - 1707.5	4M55G7D	PI/2 BPSK	0.148	21.70
		4M58G7D	QPSK	0.146	21.64
		4M58W7D	16QAM	0.114	20.56
		4M59W7D	64QAM	0.082	19.12
		4M61W7D	256QAM	0.046	16.64
Sub6 n70 (10)	1700.0 - 1705.0	8M96G7D	PI/2 BPSK	0.153	21.86
		9M01G7D	QPSK	0.147	21.68
		9M02W7D	16QAM	0.116	20.66
		8M96W7D	64QAM	0.082	19.15
		8M98W7D	256QAM	0.047	16.70
Sub6 n70 (15)	1702.5	13M4G7D	PI/2 BPSK	0.150	21.76
		13M5G7D	QPSK	0.146	21.64
		13M5W7D	16QAM	0.119	20.77
		13M4W7D	64QAM	0.084	19.25
		13M5W7D	256QAM	0.047	16.69

## 2. INTRODUCTION

### 2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub 6, mmWave. It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160 MHz), Bluetooth(iPA, ePA), BT LE(iPA, ePA), NFC, WPT, WIFI 6E.

### 2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### 2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12



## 3.2 RADIATED POWER

### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.  
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $>$  2 x span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $>$  20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(dBm)} = P_g_{(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dBi)}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(dBm)} = \text{ERP}_{(dBm)} + 2.15$$

### 3.4 PEAK- TO- AVERAGE RATIO

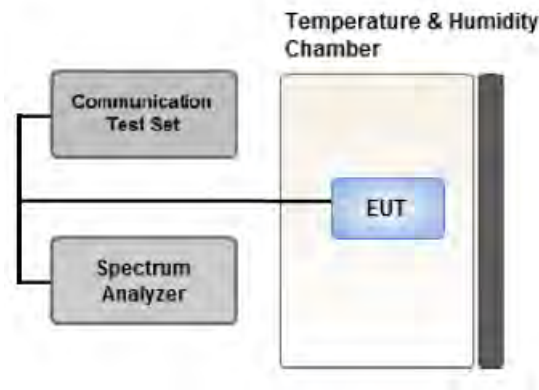

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - for continuous transmissions, set to 1 ms,
  - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

#### ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R. (dB) = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### **Test Settings(Peak Power)**


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### **Test Settings(Average Power)**

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times$  (number of points in sweep)  $\times$  (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6 \text{ dB}$  if the duty cycle is a constant 25 %.

### 3.5 OCCUPIED BANDWIDTH.

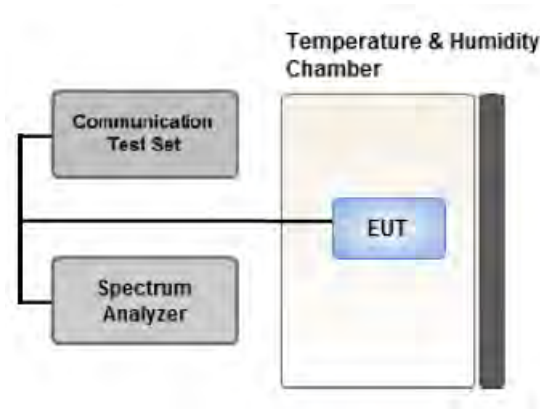

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 - 5 % of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 - 7 were repeated after changing the RBW such that it would be within 1 - 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

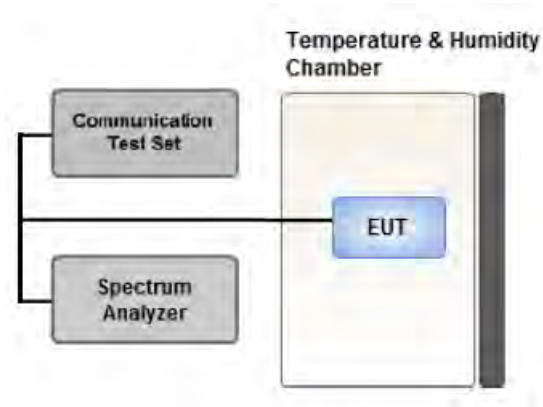

Test setup


#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 BAND EDGE

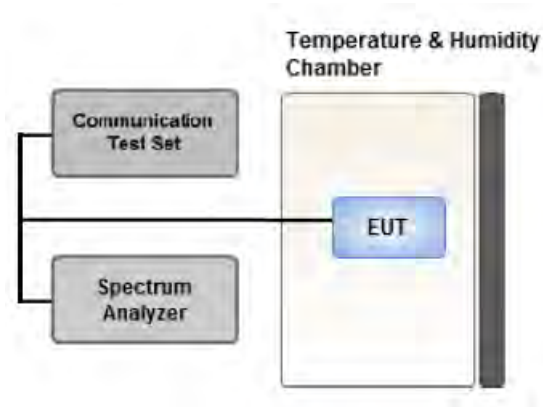

#### Test setup

##### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

##### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1 % of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span}/\text{RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


All measurements were done at 2 channels (low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

Where Margin < 1 dB the emission level is either corrected by  $10 \log(1 \text{ MHz} / \text{RB})$  or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.



### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

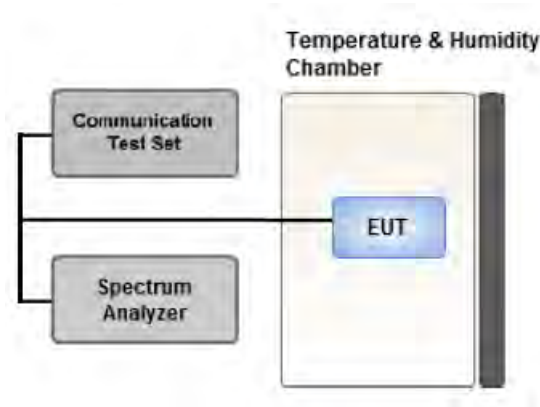

Test setup

#### Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).

2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter.

Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.

3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### 3.9 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.

Worst case: Open mode (ANT A), Half-open mode (ANT I)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA Only

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- In the case of radiated spurious emissions, all bandwidth of operation was investigated and the worst case bandwidth results are reported. (Worst case : 10 MHz(ANT A), 10 MHz(ANT I))

- SM-F741U & additional models were tested and the worst case results are reported.

(Worst case : SM-F741U)

[ ANT A Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		X

[ ANT I Worst case ]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		X
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		Y

### 3.10 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.  
(Worst case: DFT-S-OFDM)
- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.  
(Worst case: PI/2 BPSK)
- All modes of operation were investigated and the worst case configuration results are reported.  
Mode: SA Only
- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.  
Please refer to the table below.
- SM-F741U & additional models were tested and the worst case results are reported.  
(Worst case : SM-F741U)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	5, 10, 15	Mid	Full RB	0
Band Edge	PI/2 BPSK	5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	51
		15	Low	1	0
			High	1	78
		5, 10, 15	Low, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	5, 10, 15	Low, Mid, High	1	1

#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/10/2026	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/10/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	02/14/2026	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	04/27/2025	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	01/16/2025	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/09/2025	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/24/2025	Biennial
RF Switching System	FBSR-06B (1G HPF + LNA)	T&M SYSTEM	F3L1	05/22/2024	Annual
RF Switching System	FBSR-06B (3G HPF + LNA)	T&M SYSTEM	F3L2	05/22/2024	Annual
RF Switching System	FBSR-06B (6G HPF + LNA)	T&M SYSTEM	F3L3	05/22/2024	Annual
RF Switching System	FBSR-06B (LNA)	T&M SYSTEM	F3L4	05/22/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	11/17/2024	Annual
Power Amplifier	CBL26405040	CERNEX	25956	02/26/2025	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	08/25/2024	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	02/29/2025	Annual
Chamber	SU-642	ESPEC	93008124	02/19/2025	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/04/2025	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	04/17/2025	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/13/2025	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/10/2024	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287701	05/22/2024	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/23/2024	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	06/22/2024	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/24/2024	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/19/2024	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k=2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.98 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.36 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.70 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.52 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.66 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.58 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition: Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§ 2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§ 2.1051, § 27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§ 2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§ 27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§ 2.1055, § 27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report
2. All conducted tests were tested using 5G Wireless Tester.

### 6.2 Test Condition: Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§ 27.50(d)(4)	< 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§ 2.1053, § 27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

**Note:**

1. Radiated tests were tested using 5G Wireless Tester.

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test, the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand



## 8. TEST DATA (ANT A)

### 8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1697.5	Sub6 n70/ 5 MHz [15 kHz]	PI/2 BPSK	-20.80	12.83	9.60	1.99	V	< 1.00	0.111	20.44	1	12
		QPSK	-20.85	12.78	9.60	1.99	V		0.109	20.39		
		16-QAM	-21.79	11.84	9.60	1.99	V		0.088	19.45		
		64-QAM	-23.17	10.46	9.60	1.99	V		0.064	18.07		
		256-QAM	-25.15	8.48	9.60	1.99	V		0.041	16.09		
1702.5		PI/2 BPSK	-20.70	12.93	9.60	1.99	V		0.113	20.54	1	23
		QPSK	-20.71	12.92	9.60	1.99	V		0.113	20.53		
		16-QAM	-21.55	12.08	9.60	1.99	V		0.093	19.69		
		64-QAM	-22.92	10.71	9.60	1.99	V		0.068	18.32		
		256-QAM	-25.23	8.40	9.60	1.99	V		0.040	16.01		
1707.5	PI/2 BPSK	-20.39	12.81	9.60	1.99	V	0.110	20.42	1	1		
	QPSK	-20.42	12.78	9.60	1.99	V	0.109	20.39				
	16-QAM	-21.31	11.89	9.60	1.99	V	0.089	19.50				
	64-QAM	-22.87	10.33	9.60	1.99	V	0.062	17.94				
	256-QAM	-24.84	8.36	9.60	1.99	V	0.040	15.97				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1700.0		PI/2 BPSK	-20.28	13.35	9.60	1.99	V	< 1.00	0.125	20.96	1	1
		QPSK	-20.52	13.11	9.60	1.99	V		0.118	20.72		
		16-QAM	-21.36	12.27	9.60	1.99	V		0.097	19.88		
		64-QAM	-22.64	10.99	9.60	1.99	V		0.073	18.60		
		256-QAM	-25.23	8.40	9.60	1.99	V		0.040	16.01		
1702.5	Sub6 n70/ 10 MHz [15 kHz]	PI/2 BPSK	-19.85	13.78	9.60	1.99	V	< 1.00	0.138	21.39	1	50
		QPSK	-19.92	13.71	9.60	1.99	V		0.136	21.32		
		16-QAM	-20.83	12.80	9.60	1.99	V		0.110	20.41		
		64-QAM	-22.35	11.28	9.60	1.99	V		0.077	18.89		
		256-QAM	-24.72	8.91	9.60	1.99	V		0.045	16.52		
1705.0		PI/2 BPSK	-19.98	13.44	9.60	1.99	V	< 1.00	0.127	21.05	1	50
		QPSK	-20.10	13.32	9.60	1.99	V		0.124	20.93		
		16-QAM	-20.98	12.44	9.60	1.99	V		0.101	20.05		
		64-QAM	-22.42	11.00	9.60	1.99	V		0.073	18.61		
		256-QAM	-24.66	8.76	9.60	1.99	V		0.043	16.37		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
								W	W	dBm	Size	Offset
1702.5	Sub6 n70/ 15 MHz [15 kHz]	PI/2 BPSK	-19.88	13.75	9.60	1.99	V	< 1.00	0.137	21.36	1	77
		QPSK	-19.90	13.73	9.60	1.99	V		0.136	21.34		
		16-QAM	-20.77	12.86	9.60	1.99	V		0.111	20.47		
		64-QAM	-22.18	11.45	9.60	1.99	V		0.081	19.06		
		256-QAM	-24.65	8.98	9.60	1.99	V		0.046	16.59		

## 8.2 RADIATED SPURIOUS EMISSIONS

▪ NR Band:	<u>N70</u>
▪ Bandwidth:	<u>10 MHz</u>
▪ Modulation:	<u>PI/2 BPSK</u>
▪ Distance:	<u>3 meters</u>
▪ SCS:	<u>15 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
340000 (1700.0)	3 400.00	-61.15	11.10	-63.40	2.91	V	-55.21	-13.00	1	1
	5 100.00	-63.59	10.80	-58.58	3.66	V	-51.44	-13.00		
	6 800.00	-64.70	10.70	-53.58	4.25	V	-47.13	-13.00		
	8 500.00	-61.63	10.60	-47.90	4.79	V	-42.09	-13.00		
	10 200.00	-63.77	11.00	-46.78	5.33	V	-41.11	-13.00		
340500 (1702.5)	3 405.00	-61.00	11.10	-63.11	2.91	V	-54.92	-13.00	1	50
	5 107.50	-61.21	10.80	-55.72	3.67	V	-48.59	-13.00		
	6 810.00	-64.55	10.70	-53.56	4.24	V	-47.10	-13.00		
	8 512.50	-62.76	10.60	-49.11	4.80	V	-43.31	-13.00		
	10 215.00	-65.05	11.00	-48.00	5.32	V	-42.32	-13.00		
341000 (1705.0)	3 410.00	-61.94	11.10	-63.91	2.91	V	-55.72	-13.00	1	50
	5 115.00	-61.21	10.80	-55.66	3.66	V	-48.51	-13.00		
	6 820.00	-64.35	10.70	-53.32	4.25	V	-46.87	-13.00		
	8 525.00	-62.00	10.60	-48.89	4.82	V	-43.11	-13.00		
	10 230.00	-64.19	11.00	-47.53	5.33	V	-41.86	-13.00		

### 8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n70	5 MHz	1702.5	BPSK	25	0	3.98
			QPSK			4.56
			16-QAM			5.41
			64-QAM			5.85
			256-QAM			6.28
	10 MHz		BPSK	50		3.97
			QPSK			4.50
			16-QAM			5.43
			64-QAM			5.85
			256-QAM			6.42
	15 MHz		BPSK	75		4.04
			QPSK			4.44
			16-QAM			5.33
			64-QAM			5.77
			256-QAM			6.40

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 47 ~ 61.

#### 8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n70	5 MHz	1702.5	BPSK	25	0	4.4683
			QPSK			4.5415
			16-QAM			4.4987
			64-QAM			4.5144
			256-QAM			4.5016
	10 MHz		BPSK	50		9.0223
			QPSK			8.9473
			16-QAM			9.0063
			64-QAM			8.9711
			256-QAM			9.0488
	15 MHz		BPSK	75		13.498
			QPSK			13.480
			16-QAM			13.479
			64-QAM			13.481
			256-QAM			13.493

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 62 ~ 76.

### 8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n70	5	1697.5	5.2099	30.815	-80.243	-49.428	-13.00
		1702.5	8.3211	30.815	-80.564	-49.749	
		1707.5	4.9751	30.200	-80.253	-50.053	
	10	1700.0	4.0354	30.200	-80.455	-50.255	
		1702.5	9.7283	30.815	-79.992	-49.177	
		1705.0	4.0464	30.200	-80.494	-50.294	
	15	1702.5	4.0773	30.200	-79.729	-49.529	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 77 ~ 90.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

### 8.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 91 ~ 108.

### 8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
1697.5	100 %	+20(Ref)	1697 499 997	0.0	0.000 000	0.000
	100 %	-30	1697 499 994	-3.2	0.000 000	-0.002
	100 %	-20	1697 499 994	-3.2	0.000 000	-0.002
	100 %	-10	1697 499 994	-2.8	0.000 000	-0.002
	100 %	0	1697 499 993	-4.1	0.000 000	-0.002
	100 %	+10	1697 499 994	-3.5	0.000 000	-0.002
	100 %	+30	1697 499 992	-4.6	0.000 000	-0.003
	100 %	+40	1697 499 995	-2.3	0.000 000	-0.001
	100 %	+50	1697 499 992	-5.0	0.000 000	-0.003
	Batt. Endpoint	+20	1697 499 995	-2.1	0.000 000	-0.001
1707.5	100 %	+20(Ref)	1707 499 996	0.0	0.000 000	0.000
	100 %	-30	1707 499 992	-3.6	0.000 000	-0.002
	100 %	-20	1707 499 993	-2.6	0.000 000	-0.002
	100 %	-10	1707 499 995	-1.3	0.000 000	-0.001
	100 %	0	1707 499 994	-2.2	0.000 000	-0.001
	100 %	+10	1707 499 993	-2.6	0.000 000	-0.002
	100 %	+30	1707 499 993	-2.7	0.000 000	-0.002
	100 %	+40	1707 499 994	-1.3	0.000 000	-0.001
	100 %	+50	1707 499 995	-0.6	0.000 000	0.000
	Batt. Endpoint	+20	1707 499 995	-0.8	0.000 000	0.000



- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
1700.0	100 %	+20(Ref)	1700 000 003	0.0	0.000 000	0.000
	100 %	-30	1700 000 006	2.6	0.000 000	0.002
	100 %	-20	1700 000 009	5.8	0.000 000	0.003
	100 %	-10	1700 000 008	4.7	0.000 000	0.003
	100 %	0	1700 000 007	3.7	0.000 000	0.002
	100 %	+10	1700 000 007	3.4	0.000 000	0.002
	100 %	+30	1700 000 006	3.0	0.000 000	0.002
	100 %	+40	1700 000 008	4.3	0.000 000	0.003
	100 %	+50	1700 000 009	5.2	0.000 000	0.003
	Batt. Endpoint	+20	1700 000 010	7.0	0.000 000	0.004
1705.0	100 %	+20(Ref)	1705 000 002	0.0	0.000 000	0.000
	100 %	-30	1705 000 005	3.9	0.000 000	0.002
	100 %	-20	1705 000 005	3.5	0.000 000	0.002
	100 %	-10	1705 000 004	2.3	0.000 000	0.001
	100 %	0	1705 000 003	1.2	0.000 000	0.001
	100 %	+10	1705 000 002	1.0	0.000 000	0.001
	100 %	+30	1705 000 004	3.0	0.000 000	0.002
	100 %	+40	1705 000 007	5.1	0.000 000	0.003
	100 %	+50	1705 000 006	4.3	0.000 000	0.003
	Batt. Endpoint	+20	1705 000 007	5.4	0.000 000	0.003

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
1702.5	100 %	+20(Ref)	1702 500 002	0.0	0.000 000	0.000
	100 %	-30	1702 500 004	2.2	0.000 000	0.001
	100 %	-20	1702 500 004	1.7	0.000 000	0.001
	100 %	-10	1702 500 004	1.8	0.000 000	0.001
	100 %	0	1702 500 004	1.6	0.000 000	0.001
	100 %	+10	1702 500 003	0.7	0.000 000	0.000
	100 %	+30	1702 500 002	0.0	0.000 000	0.000
	100 %	+40	1702 500 003	0.6	0.000 000	0.000
	100 %	+50	1702 500 003	0.5	0.000 000	0.000
	Batt. Endpoint	+20	1702 500 004	1.8	0.000 000	0.001

## 9. TEST DATA (ANT I)

### 9.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1697.5	Sub6 n70/ 5 MHz [15 kHz]	PI/2 BPSK	-19.54	14.09	9.60	1.99	V	< 1.00	0.148	21.70	1	12
		QPSK	-19.60	14.03	9.60	1.99	V		0.146	21.64		
		16-QAM	-20.68	12.95	9.60	1.99	V		0.114	20.56		
		64-QAM	-22.12	11.51	9.60	1.99	V		0.082	19.12		
		256-QAM	-24.60	9.03	9.60	1.99	V		0.046	16.64		
1702.5		PI/2 BPSK	-19.56	14.07	9.60	1.99	V		0.147	21.68	1	23
		QPSK	-19.62	14.01	9.60	1.99	V		0.145	21.62		
		16-QAM	-20.78	12.85	9.60	1.99	V		0.111	20.46		
		64-QAM	-22.21	11.42	9.60	1.99	V		0.080	19.03		
		256-QAM	-24.68	8.95	9.60	1.99	V		0.045	16.56		
1707.5	PI/2 BPSK	-19.53	13.67	9.60	1.99	V	0.134	21.28	1	1		
	QPSK	-19.56	13.64	9.60	1.99	V	0.133	21.25				
	16-QAM	-20.64	12.56	9.60	1.99	V	0.104	20.17				
	64-QAM	-22.16	11.04	9.60	1.99	V	0.073	18.65				
	256-QAM	-24.62	8.58	9.60	1.99	V	0.042	16.19				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1700.0		PI/2 BPSK	-19.38	14.25	9.60	1.99	V	< 1.00	0.153	21.86	1	50
		QPSK	-19.56	14.07	9.60	1.99	V		0.147	21.68		
		16-QAM	-20.58	13.05	9.60	1.99	V		0.116	20.66		
		64-QAM	-22.09	11.54	9.60	1.99	V		0.082	19.15		
		256-QAM	-24.54	9.09	9.60	1.99	V		0.047	16.70		
1702.5	Sub6 n70/ 10 MHz [15 kHz]	PI/2 BPSK	-19.44	14.19	9.60	1.99	V	< 1.00	0.152	21.80	1	1
		QPSK	-19.62	14.01	9.60	1.99	V		0.145	21.62		
		16-QAM	-20.68	12.95	9.60	1.99	V		0.114	20.56		
		64-QAM	-22.20	11.43	9.60	1.99	V		0.080	19.04		
		256-QAM	-24.72	8.91	9.60	1.99	V		0.045	16.52		
1705.0		PI/2 BPSK	-19.43	13.99	9.60	1.99	V	< 1.00	0.145	21.60	1	26
		QPSK	-19.56	13.86	9.60	1.99	V		0.140	21.47		
		16-QAM	-20.64	12.78	9.60	1.99	V		0.109	20.39		
		64-QAM	-22.09	11.33	9.60	1.99	V		0.078	18.94		
		256-QAM	-24.64	8.78	9.60	1.99	V		0.044	16.39		

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol	Limit	EIRP		RB	
									W	W	dBm	Size
1702.5	Sub6 n70/ 15 MHz [15 kHz]	PI/2 BPSK	-19.48	14.15	9.60	1.99	V	< 1.00	0.150	21.76	1	39
		QPSK	-19.60	14.03	9.60	1.99	V		0.146	21.64		
		16-QAM	-20.47	13.16	9.60	1.99	V		0.119	20.77		
		64-QAM	-21.99	11.64	9.60	1.99	V		0.084	19.25		
		256-QAM	-24.55	9.08	9.60	1.99	V		0.047	16.69		

## 9.2 RADIATED SPURIOUS EMISSIONS

▣ NR Band:	<u>N70</u>
▣ Bandwidth:	<u>10 MHz</u>
▣ Modulation:	<u>PI/2 BPSK</u>
▣ Distance:	<u>3 meters</u>
▣ SCS:	<u>15 kHz</u>

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	RB	
									Size	Offset
340000 (1700.0)	3 400.00	-61.39	11.10	-63.64	2.91	H	-55.45	-13.00	1	50
	5 100.00	-54.90	10.80	-49.89	3.66	H	-42.75	-13.00		
	6 800.00	-63.35	10.70	-52.23	4.25	H	-45.78	-13.00		
	8 500.00	-62.29	10.60	-48.56	4.79	H	-42.75	-13.00		
	10 200.00	-63.35	11.00	-46.36	5.33	H	-40.69	-13.00		
340500 (1702.5)	3 405.00	-53.24	11.10	-55.35	2.91	H	-47.16	-13.00	1	1
	5 107.50	-56.58	10.80	-51.09	3.67	H	-43.96	-13.00		
	6 810.00	-64.55	10.70	-53.56	4.24	H	-47.10	-13.00		
	8 512.50	-63.44	10.60	-49.79	4.80	H	-43.99	-13.00		
	10 215.00	-65.04	11.00	-47.99	5.32	H	-42.31	-13.00		
341000 (1705.0)	3 410.00	-59.74	11.10	-61.71	2.91	H	-53.52	-13.00	1	26
	5 115.00	-56.10	10.80	-50.55	3.66	H	-43.40	-13.00		
	6 820.00	-65.83	10.70	-54.80	4.25	H	-48.35	-13.00		
	8 525.00	-64.00	10.60	-50.89	4.82	H	-45.11	-13.00		
	10 230.00	-63.96	11.00	-47.30	5.33	H	-41.63	-13.00		

### 9.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n70	5 MHz	1702.5	BPSK	25	0	4.22
			QPSK			5.17
			16-QAM			5.97
			64-QAM			6.10
			256-QAM			6.05
	10 MHz		BPSK	50		3.99
			QPSK			5.12
			16-QAM			5.95
			64-QAM			6.27
			256-QAM			6.64
	15 MHz		BPSK	75		3.93
			QPSK			5.19
			16-QAM			6.01
			64-QAM			6.10
			256-QAM			6.34

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 110 ~ 124.

#### 9.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n70	5 MHz	1702.5	BPSK	25	0	4.5470
			QPSK			4.5802
			16-QAM			4.5833
			64-QAM			4.5933
			256-QAM			4.6114
	10 MHz		BPSK	50		8.9606
			QPSK			9.0104
			16-QAM			9.0214
			64-QAM			8.9635
			256-QAM			8.9748
	15 MHz		BPSK	75		13.442
			QPSK			13.452
			16-QAM			13.464
			64-QAM			13.431
			256-QAM			13.491

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 125 ~ 139.



### 9.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n70	5	1697.5	1.9956	30.000	-78.884	-48.884	-13.00
		1702.5	3.4009	30.000	-78.283	-48.283	
		1707.5	2.0071	30.000	-77.603	-47.603	
	10	1700.0	2.0011	30.000	-77.805	-47.805	
		1702.5	2.0031	30.000	-77.905	-47.905	
		1705.0	2.0066	30.000	-77.343	-47.343	
	15	1702.5	2.0006	30.000	-78.387	-48.387	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 140 ~ 153.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.294
1 – 5	30.000
5 – 10	30.615
10 – 15	31.140
15 – 20	31.513
Above 20	32.155

### 9.6 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 154 ~ 171.

### 9.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 5 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
1697.5	100 %	+20(Ref)	1697 499 998	0.0	0.000 000	0.000
	100 %	-30	1697 499 995	-3.5	0.000 000	-0.002
	100 %	-20	1697 499 995	-3.1	0.000 000	-0.002
	100 %	-10	1697 499 996	-2.0	0.000 000	-0.001
	100 %	0	1697 499 994	-4.7	0.000 000	-0.003
	100 %	+10	1697 499 996	-1.8	0.000 000	-0.001
	100 %	+30	1697 499 996	-2.6	0.000 000	-0.002
	100 %	+40	1697 499 996	-2.7	0.000 000	-0.002
	100 %	+50	1697 499 994	-3.8	0.000 000	-0.002
	Batt. Endpoint	+20	1697 499 993	-4.8	0.000 000	-0.003
1707.5	100 %	+20(Ref)	1707 499 998	0.0	0.000 000	0.000
	100 %	-30	1707 499 994	-4.0	0.000 000	-0.002
	100 %	-20	1707 499 995	-2.8	0.000 000	-0.002
	100 %	-10	1707 499 996	-1.5	0.000 000	-0.001
	100 %	0	1707 499 996	-1.3	0.000 000	-0.001
	100 %	+10	1707 499 995	-3.2	0.000 000	-0.002
	100 %	+30	1707 499 997	-1.2	0.000 000	-0.001
	100 %	+40	1707 499 995	-3.2	0.000 000	-0.002
	100 %	+50	1707 499 995	-2.3	0.000 000	-0.001
	Batt. Endpoint	+20	1707 499 997	-1.2	0.000 000	-0.001

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
1700.0	100 %	+20(Ref)	1700 000 003	0.0	0.000 000	0.000
	100 %	-30	1700 000 009	5.2	0.000 000	0.003
	100 %	-20	1700 000 007	3.8	0.000 000	0.002
	100 %	-10	1700 000 005	1.6	0.000 000	0.001
	100 %	0	1700 000 008	4.4	0.000 000	0.003
	100 %	+10	1700 000 010	6.2	0.000 000	0.004
	100 %	+30	1700 000 009	5.4	0.000 000	0.003
	100 %	+40	1700 000 009	5.3	0.000 000	0.003
	100 %	+50	1700 000 007	3.5	0.000 000	0.002
	Batt. Endpoint	+20	1700 000 008	4.1	0.000 000	0.002
1705.0	100 %	+20(Ref)	1705 000 002	0.0	0.000 000	0.000
	100 %	-30	1705 000 006	4.6	0.000 000	0.003
	100 %	-20	1705 000 003	1.6	0.000 000	0.001
	100 %	-10	1705 000 003	1.1	0.000 000	0.001
	100 %	0	1705 000 003	0.8	0.000 000	0.000
	100 %	+10	1705 000 005	3.0	0.000 000	0.002
	100 %	+30	1705 000 004	2.6	0.000 000	0.002
	100 %	+40	1705 000 004	2.1	0.000 000	0.001
	100 %	+50	1705 000 003	1.1	0.000 000	0.001
	Batt. Endpoint	+20	1705 000 006	3.9	0.000 000	0.002

- ▣ BandWidth: 15 MHz
- ▣ Voltage(100 %): 3.880 VDC
- ▣ Batt. Endpoint: 3.300 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency	Voltage	Temp.	Frequency	Frequency	Deviation	ppm
(MHz)	(%)	(°C)	(Hz)	Error (Hz)	(%)	
1702.5	100 %	+20(Ref)	1702 500 001	0.0	0.000 000	0.000
	100 %	-30	1702 500 003	2.4	0.000 000	0.001
	100 %	-20	1702 500 002	1.5	0.000 000	0.001
	100 %	-10	1702 500 002	1.0	0.000 000	0.001
	100 %	0	1702 500 002	1.1	0.000 000	0.001
	100 %	+10	1702 500 005	3.7	0.000 000	0.002
	100 %	+30	1702 500 001	0.0	0.000 000	0.000
	100 %	+40	1702 500 005	3.8	0.000 000	0.002
	100 %	+50	1702 500 003	2.1	0.000 000	0.001
	Batt. Endpoint	+20	1702 500 003	2.5	0.000 000	0.001

## 10. TEST DATA (Ant I, Ant A)

### 10.1 UPLINK CARRIER AGGREGATION

#### Test Note

- All tests were evaluated for the two bands using various combinations of RB size, RB offset, modulation, and channel bandwidth.
- All modes of operation were investigated and the worst case configuration results are reported in this section.

Please refer to the table below.

- The worst case is reported with the modulations, RB sizes and offsets.

- N70A(ANT I)-N71A(ANT A)

(PCC - Modulation: BPSK, RB: 1, RB Offset: 50, SCC - Modulation: BPSK, RB: 1, RB Offset: 77)

#### Radiated Spurious Emissions

PCC	SCC	PCC		SCC	
		BW(MHz)	Channel	BW(MHz)	Channel
N70A(ANT I)	N71A(ANT A)	10	340000	15	136100

#### 10.1.1 RADIATED SPURIOUS EMISSIONS

N70A(ANT I)(PCC)- N71A(ANT A)(SCC)

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
3 400.00	-59.11	11.10	-61.36	2.91	V	-53.17	-13.00
5 100.00	-60.11	10.80	-55.10	3.66	V	-47.96	-13.00
6 800.00	-59.37	10.70	-48.25	4.25	V	-41.80	-13.00

Freq.(MHz)	Measured Level [dBm]	Ant. Gain (dBi)	Substitute Level [dBm]	C.L	Pol.	Result (dBm)	Limit (dBm)
1 361.00	-60.11	7.00	-66.32	1.80	H	-61.12	-13.00
2 041.50	-58.14	9.40	-64.26	2.23	H	-57.09	-13.00
2 722.00	-63.22	10.40	-67.56	2.63	H	-59.79	-13.00

## 11. TEST PLOTS (ANT A)

NR70\_5 M\_PAR\_Mid\_BPSK\_FullRB



NR70\_5 M\_PAR\_Mid\_QPSK\_FullRB






NR70\_5 M\_PAR\_Mid\_16QAM\_FullRB




NR70\_5 M\_PAR\_Mid\_64QAM\_FullRB

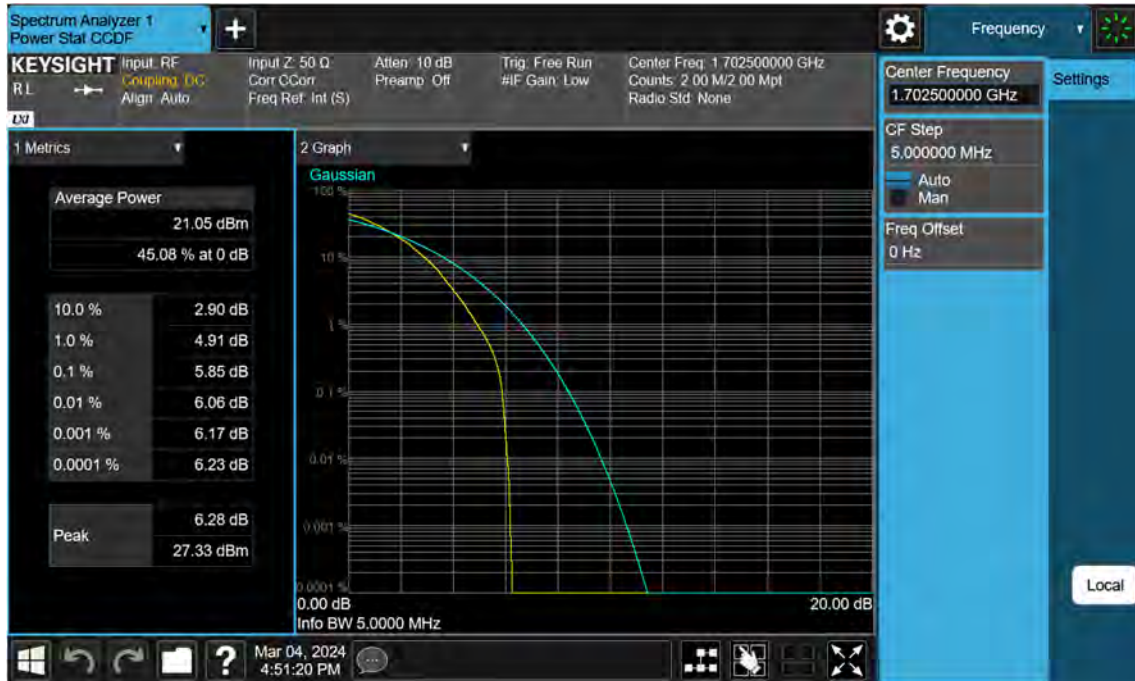

NR70\_5\_M\_PAR\_Mid\_256QAM\_FullRB



NR70\_10 M\_PAR\_Mid\_BPSK\_FullIRB

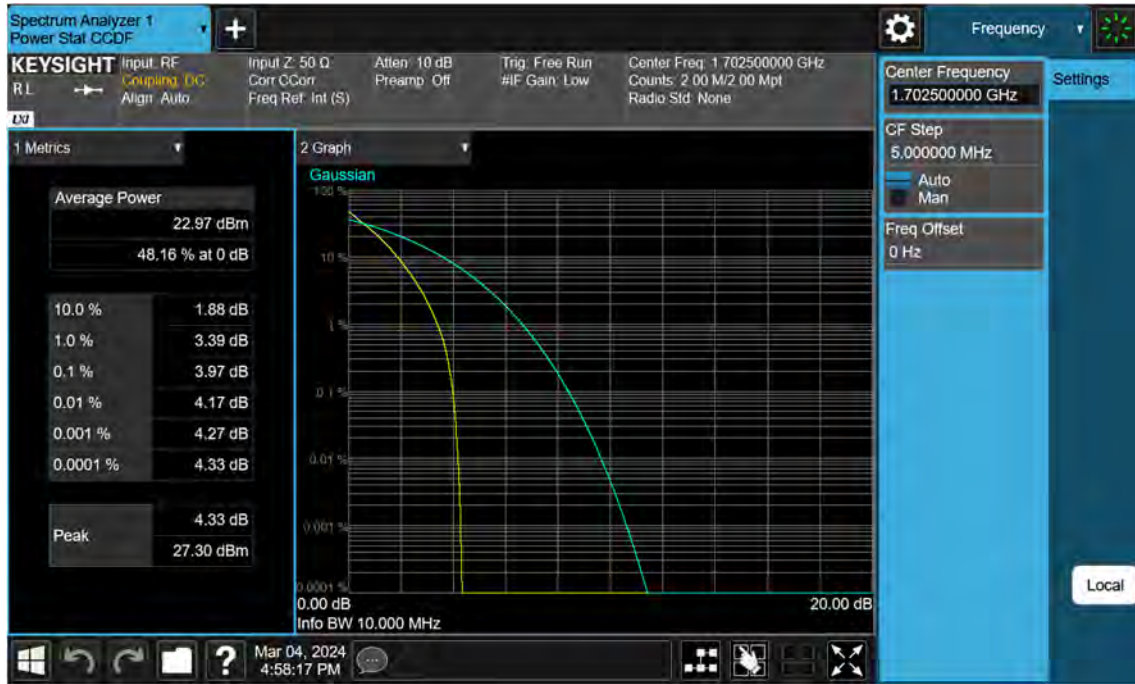

NR70\_10 M\_PAR\_Mid\_QPSK\_FullRB



NR70\_10 M\_PAR\_Mid\_16QAM\_FullRB





NR70\_10 M\_PAR\_Mid\_64QAM\_FullRB




NR70\_10 M\_PAR\_Mid\_256QAM\_FullRB





NR70\_15 M\_PAR\_Mid\_BPSK\_FullIRB

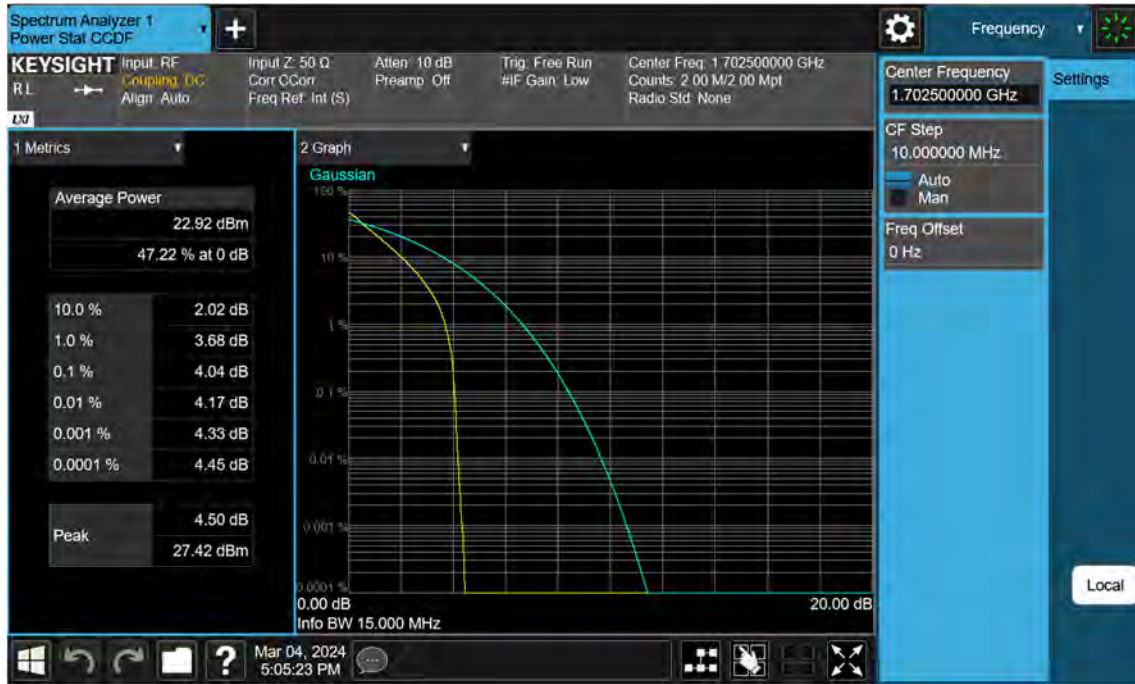

NR70\_15 M\_PAR\_Mid\_QPSK\_FullRB



NR70\_15 M\_PAR\_Mid\_16QAM\_FullRB



NR70\_15 M\_PAR\_Mid\_64QAM\_FullRB



NR70\_15 M\_PAR\_Mid\_256QAM\_FullRB




NR70\_5 M\_OBW\_Mid\_BPSK\_FullIRB





NR70\_5 M\_OBW\_Mid\_QPSK\_FullRB

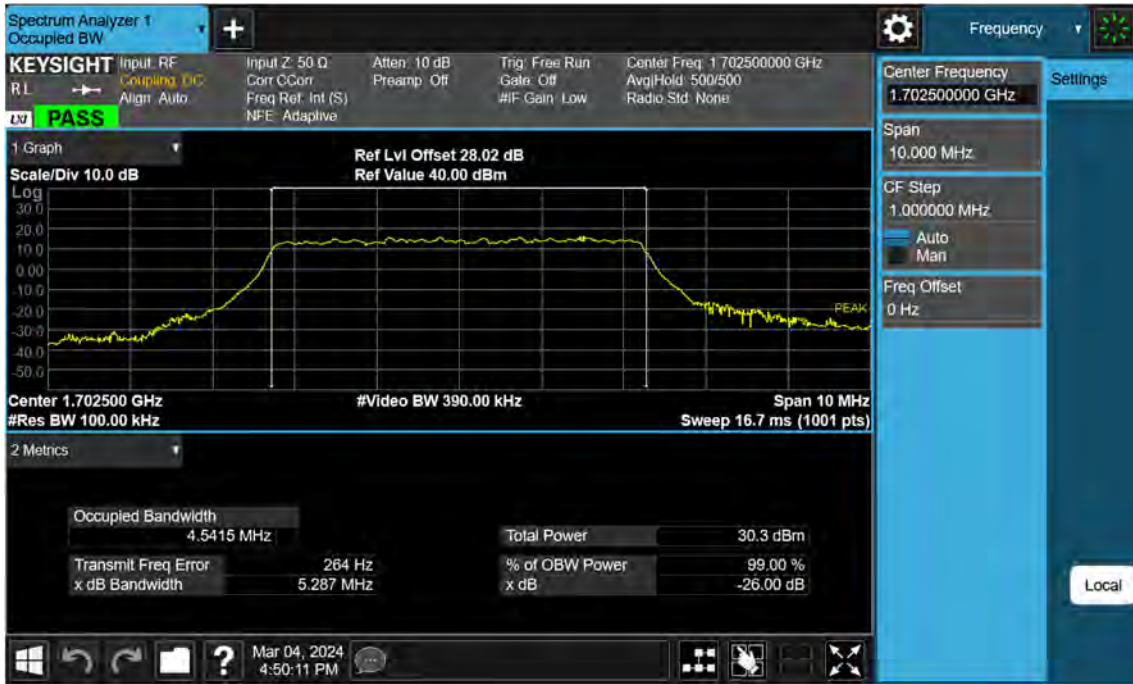

NR70\_5 M\_OBW\_Mid\_16QAM\_FullRB






NR70\_5 M\_OBW\_Mid\_64QAM\_FullRB



NR70\_5 M\_OBW\_Mid\_256QAM\_FullRB

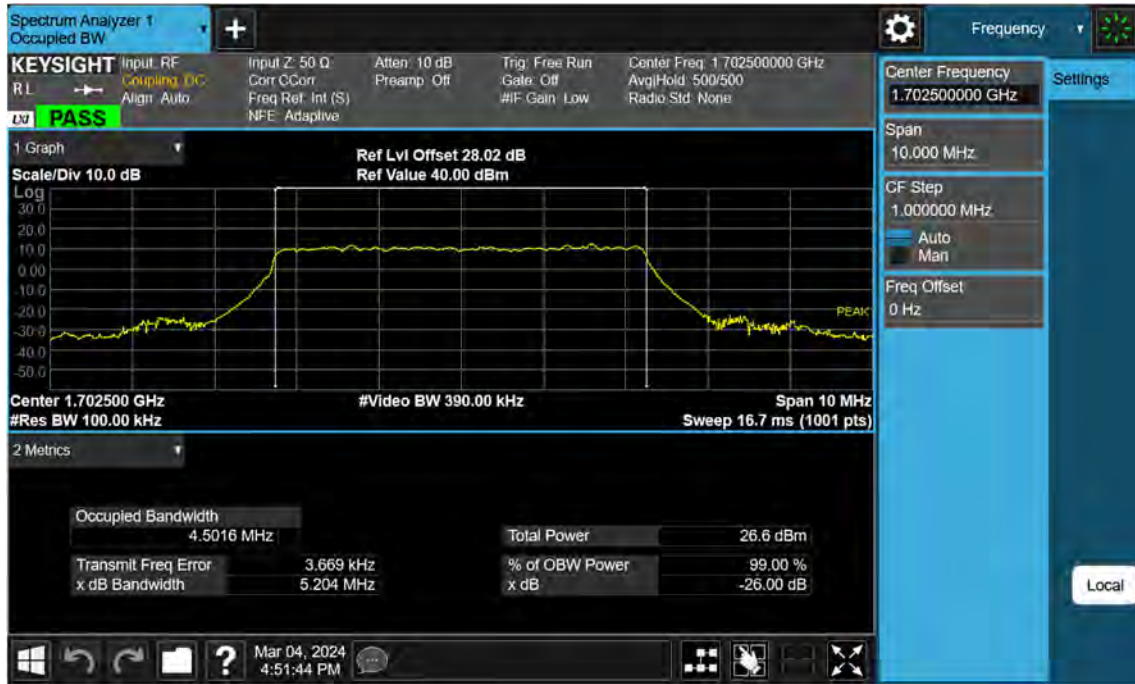

NR70\_10 M\_OBW\_Mid\_BPSK\_FullRB



NR70\_10\_M\_OBW\_Mid\_QPSK\_FullRB



NR70\_10 M\_OBW\_Mid\_16QAM\_FullRB



NR70\_10 M\_OBW\_Mid\_64QAM\_FullRB





NR70\_10 M\_OBW\_Mid\_256QAM\_FullRB



NR70\_15 M\_OBW\_Mid\_BPSK\_FullRB






NR70\_15 M\_OBW\_Mid\_QPSK\_FullRB




NR70\_15 M\_OBW\_Mid\_16QAM\_FullRB

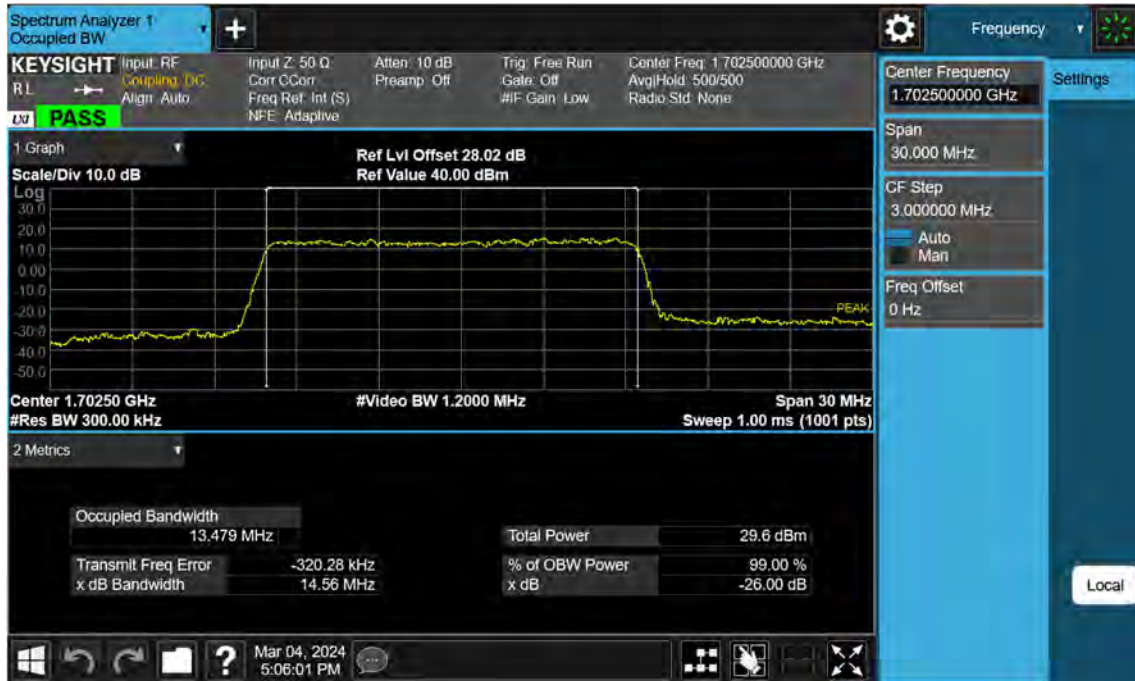


NR70\_15 M\_OBW\_Mid\_64QAM\_FullRB



NR70\_15 M\_OBW\_Mid\_256QAM\_FullRB

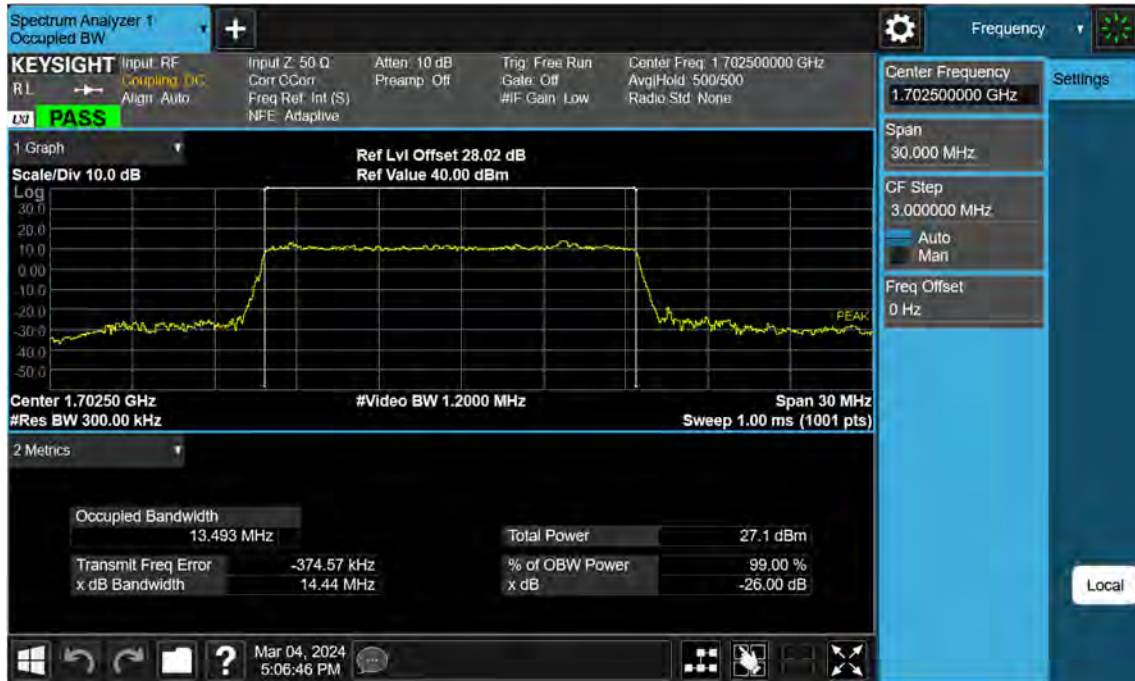


NR70\_5 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

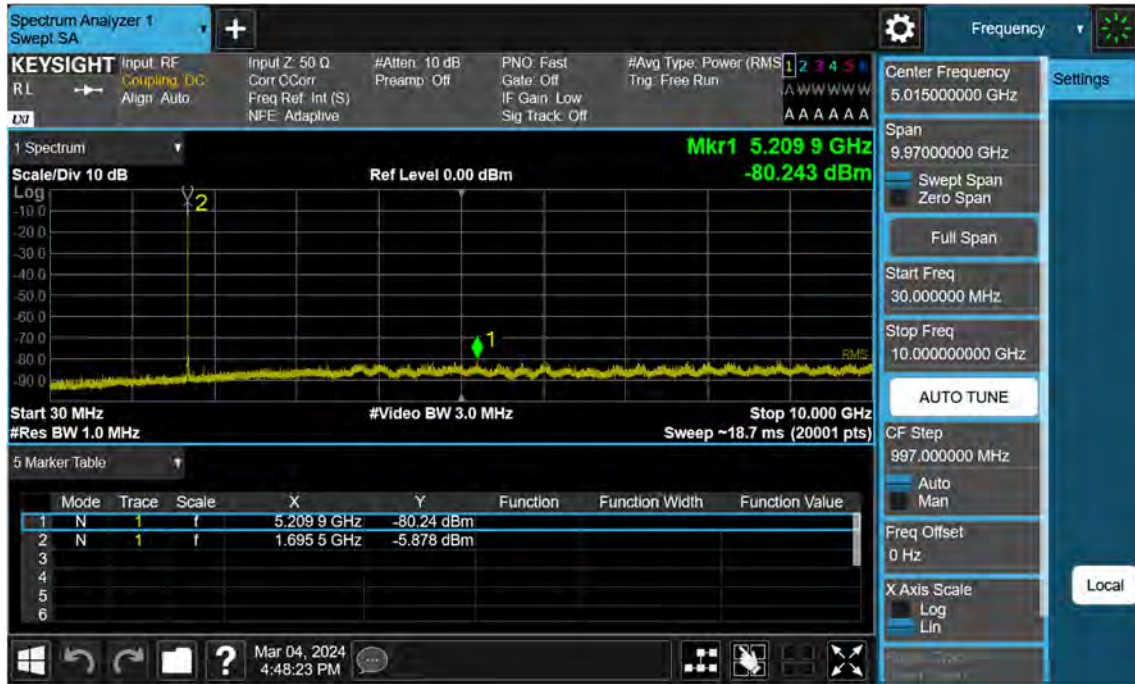




NR70\_5 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

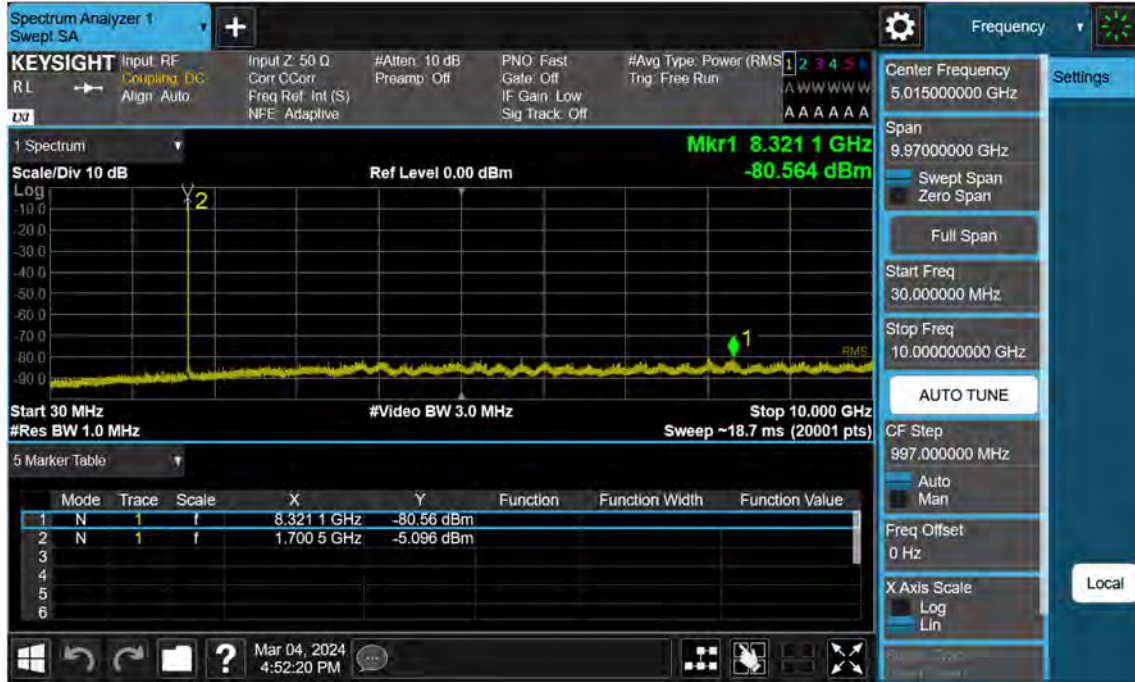

NR70\_5 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

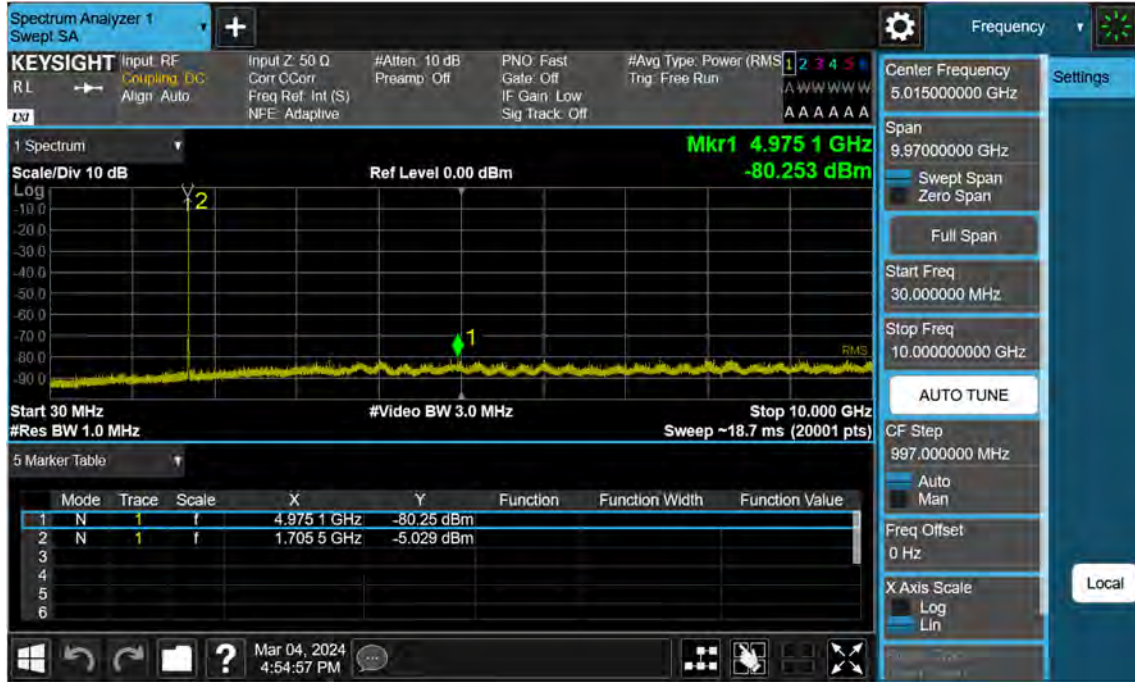


NR70\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB






NR70\_10 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

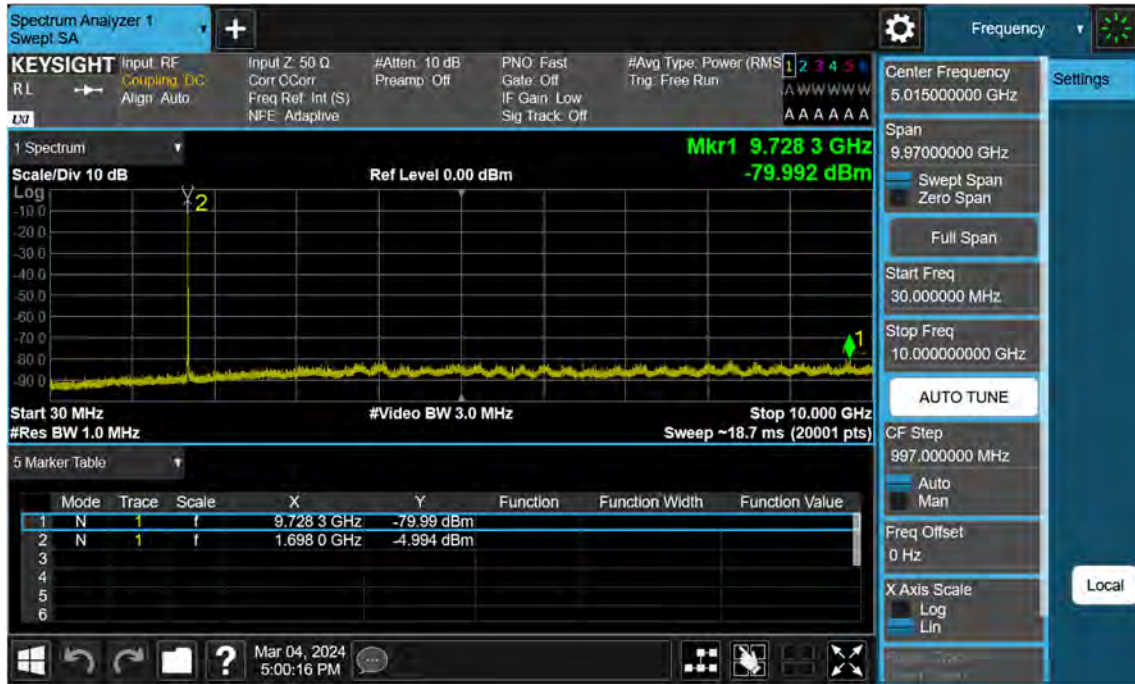


NR70\_10 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB




NR70\_15 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

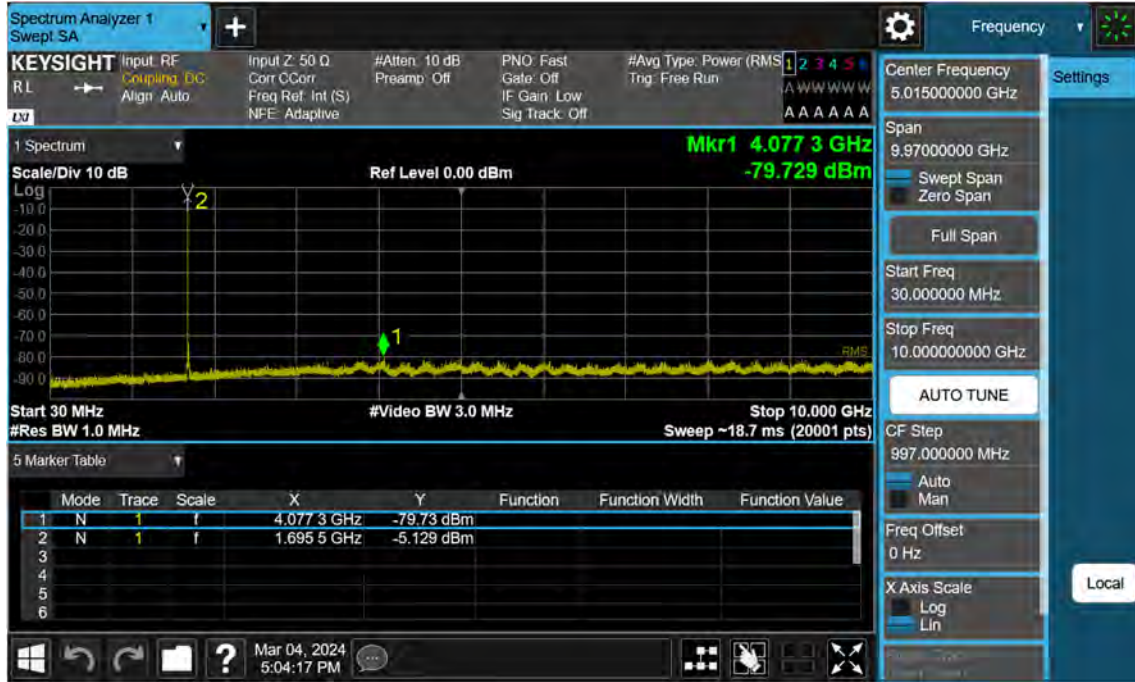

NR70\_5 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

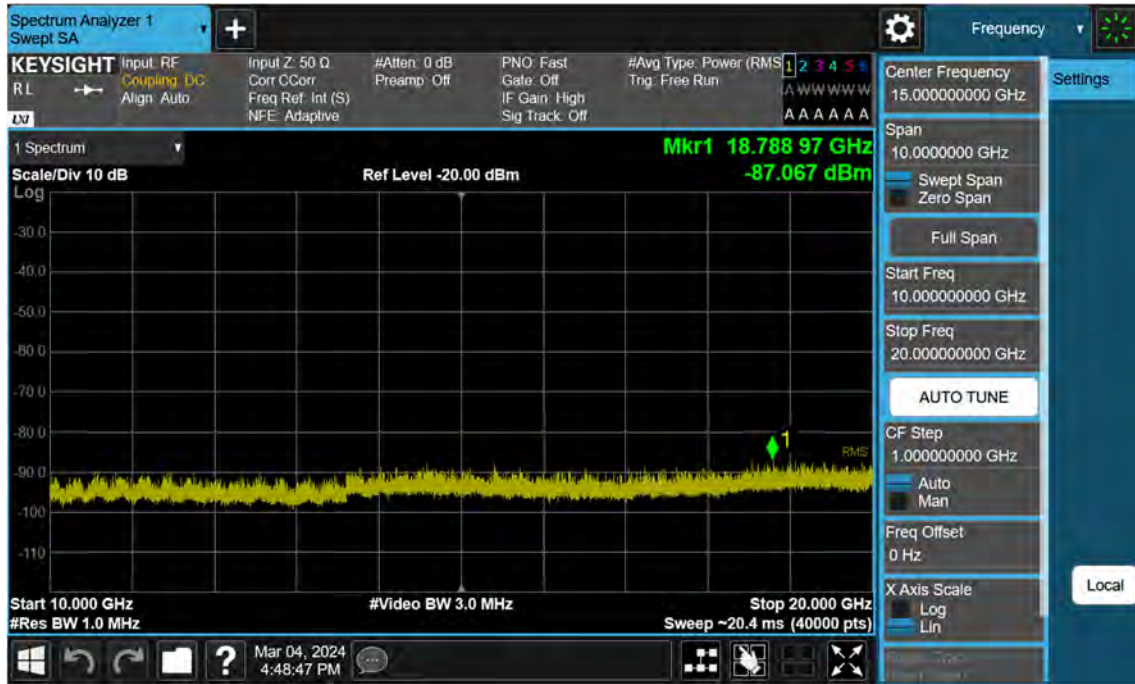

NR70\_5 M\_Conducted Spurious(Above10 G)\_Mid\_BPSK\_FullRB

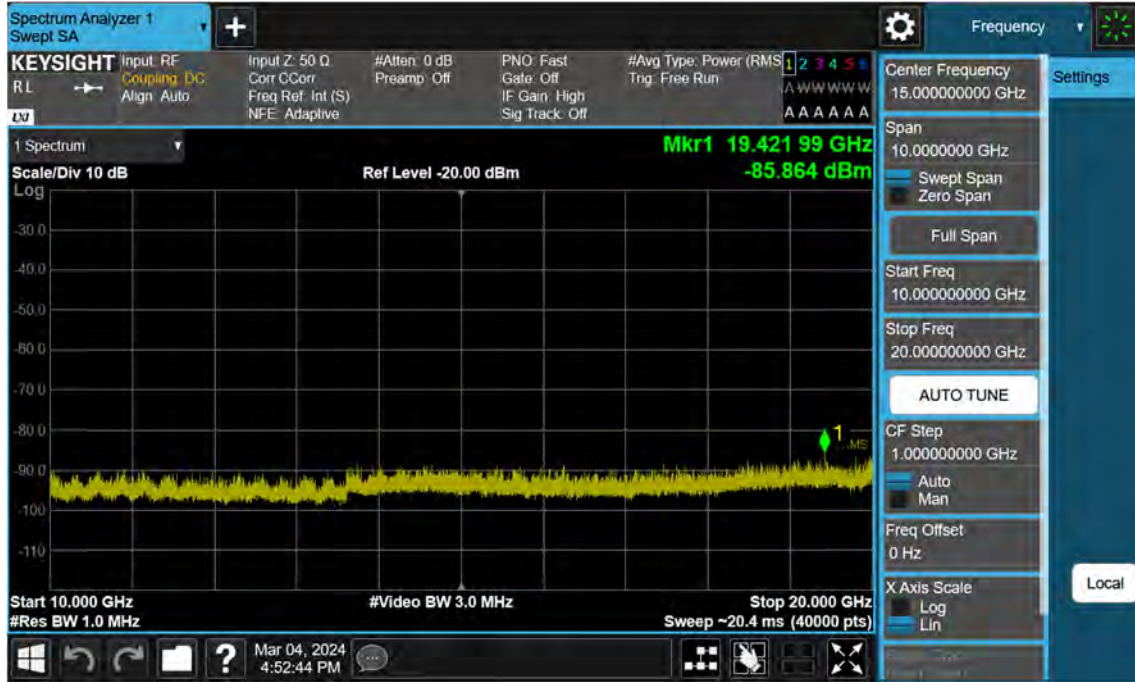





NR70\_5 M\_Conducted Spurious(Above10 G)\_High\_BPSK\_1RB



NR70\_10 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

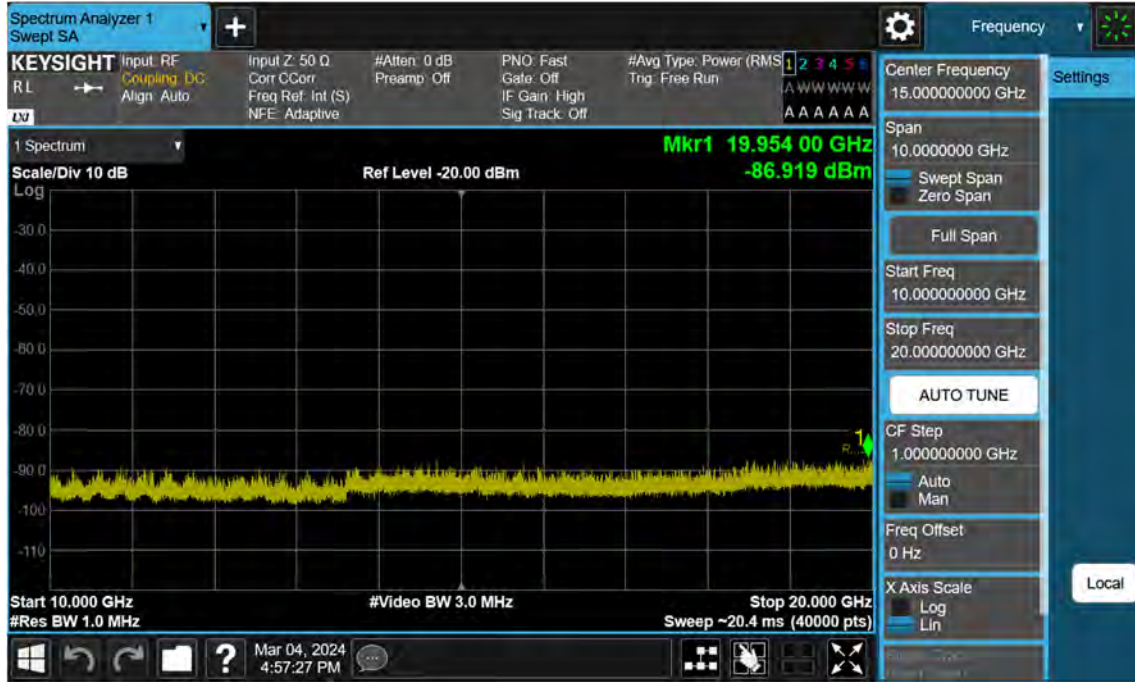


NR70\_10 M\_Conducted Spurious(Above10 G)\_Mid\_BPSK\_FullIRB

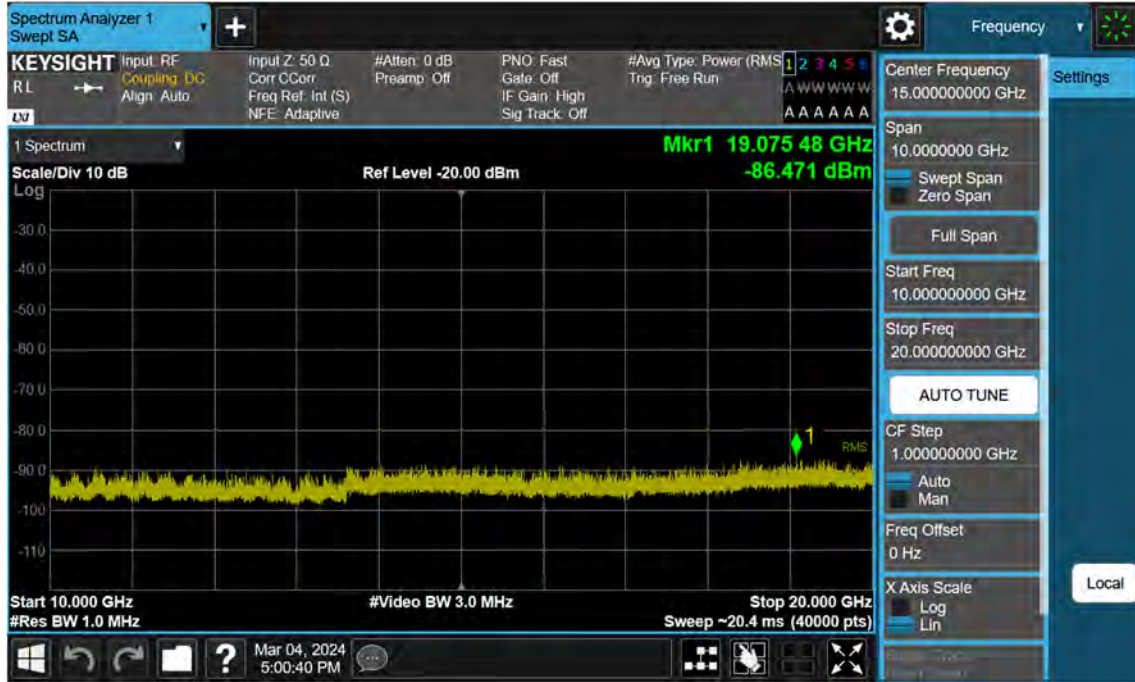




NR70\_10 M\_Conducted Spurious(Above10 G)\_High\_BPSK\_1RB

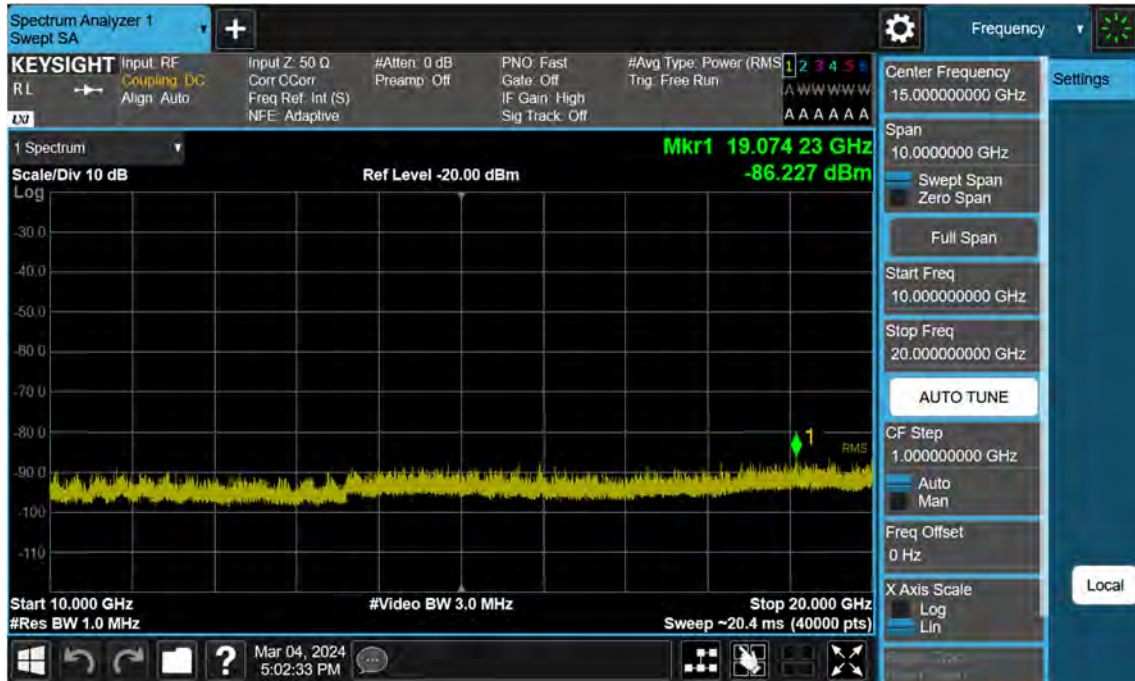

NR70\_15 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

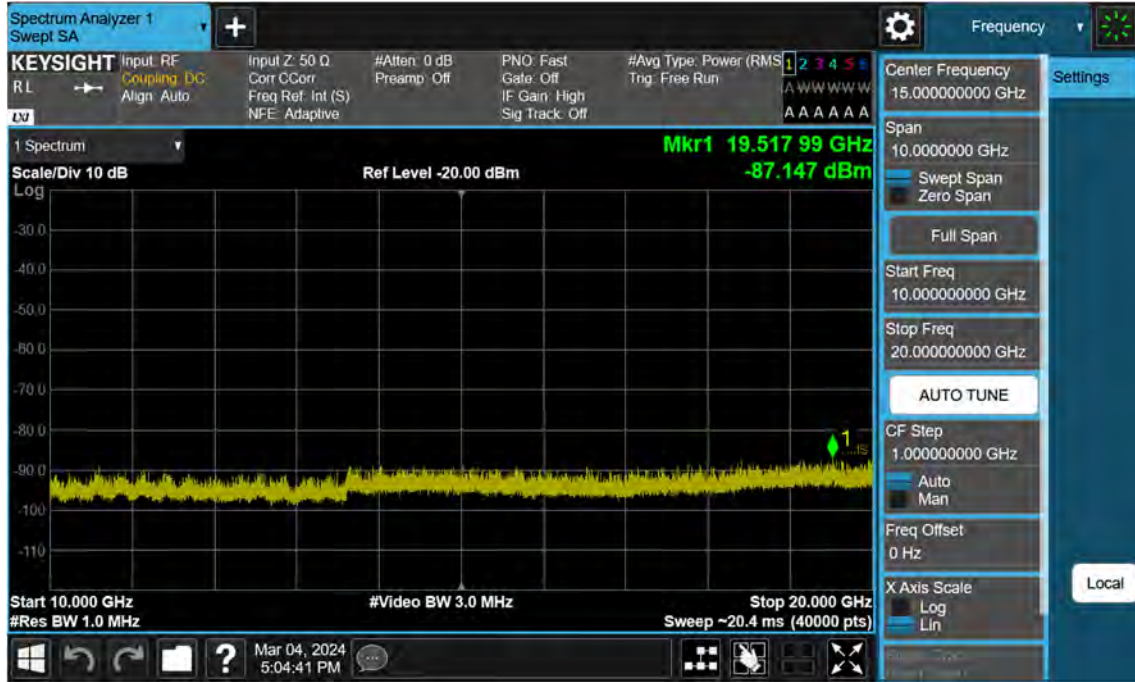

NR70\_5 M\_Band Edge\_Low\_BPSK\_1RB



NR70\_5 M\_Band Edge\_Low\_BPSK\_FullRB




NR70\_5 M\_Extended Band Edge\_Low\_BPSK\_FullRB






NR70\_5 M\_Band Edge\_High\_BPSK\_1RB

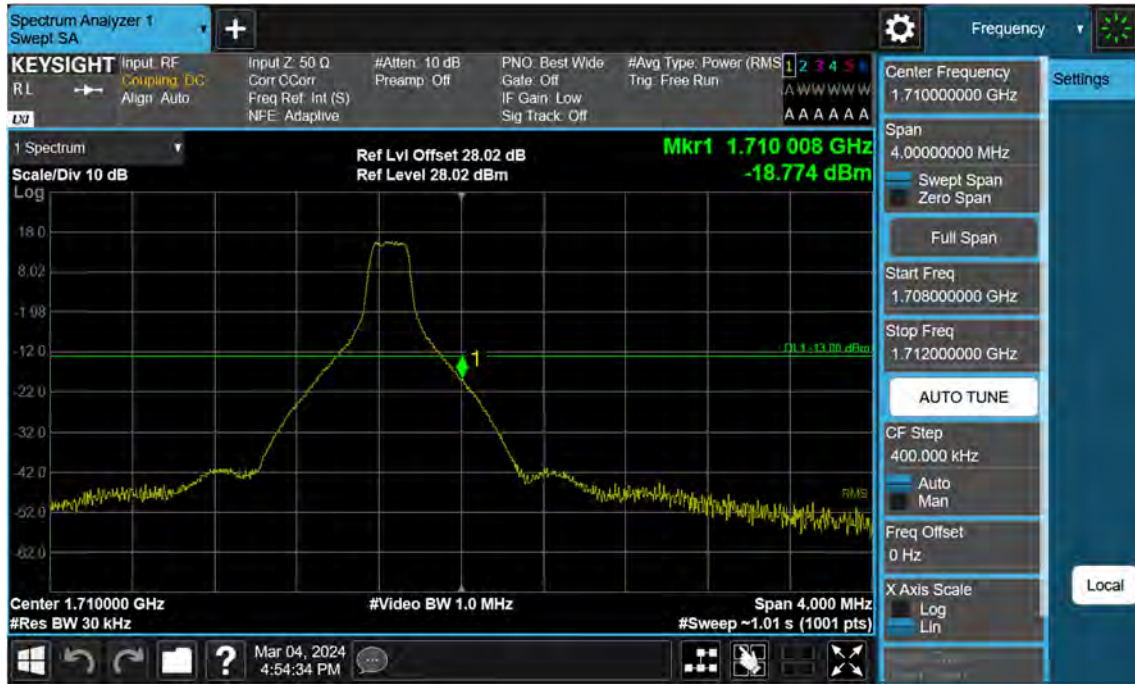

NR70\_5 M\_Band Edge\_High\_BPSK\_FullRB




NR70\_5 M\_Extended Band Edge\_High\_BPSK\_FullRB

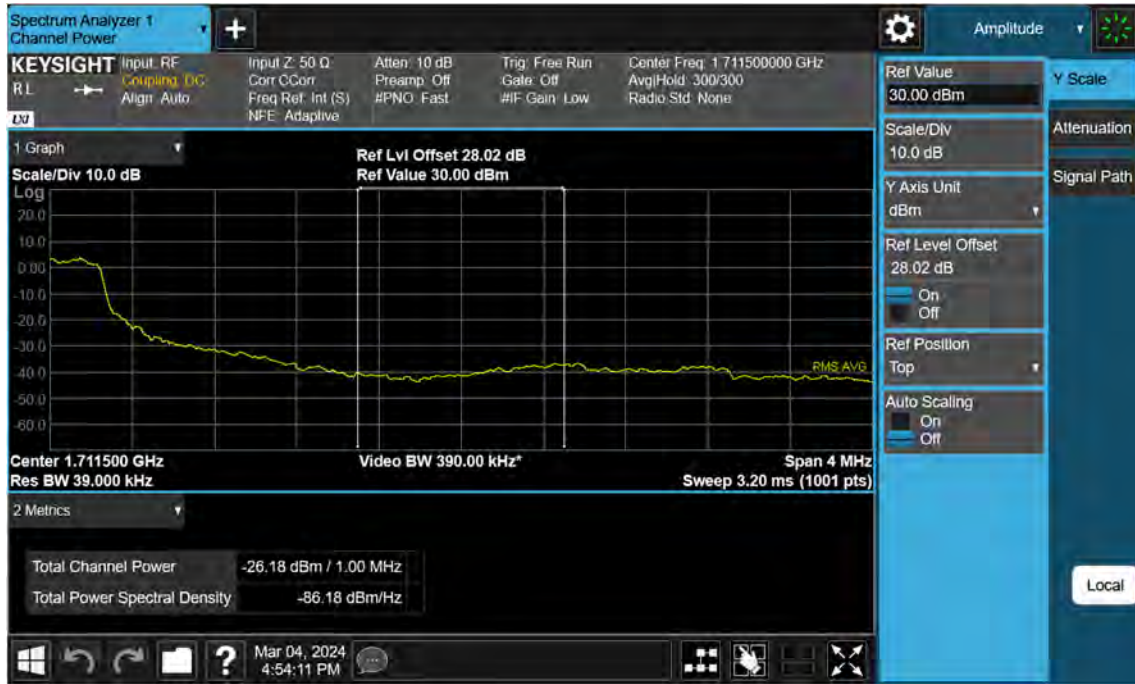



NR70\_10 M\_Band Edge\_Low\_BPSK\_1RB

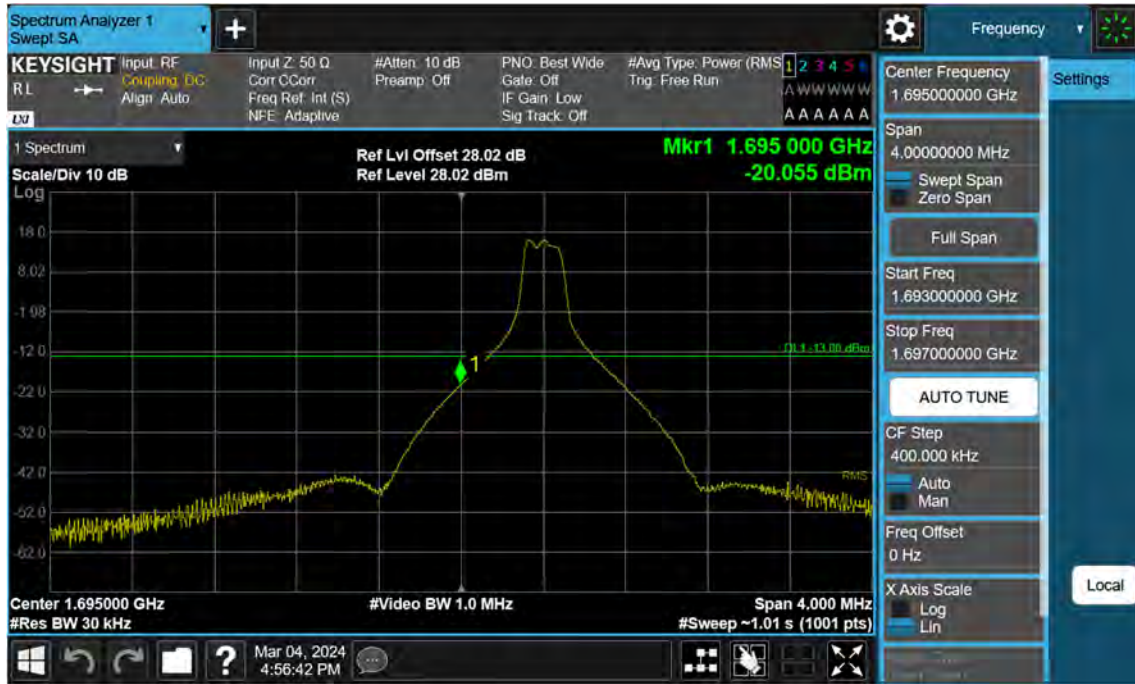


NR70\_10 M\_Band Edge\_Low\_BPSK\_FullRB



NR70\_10 M\_Extended Band Edge\_Low\_BPSK\_FullRB



NR70\_10 M\_Band Edge\_High\_BPSK\_1RB

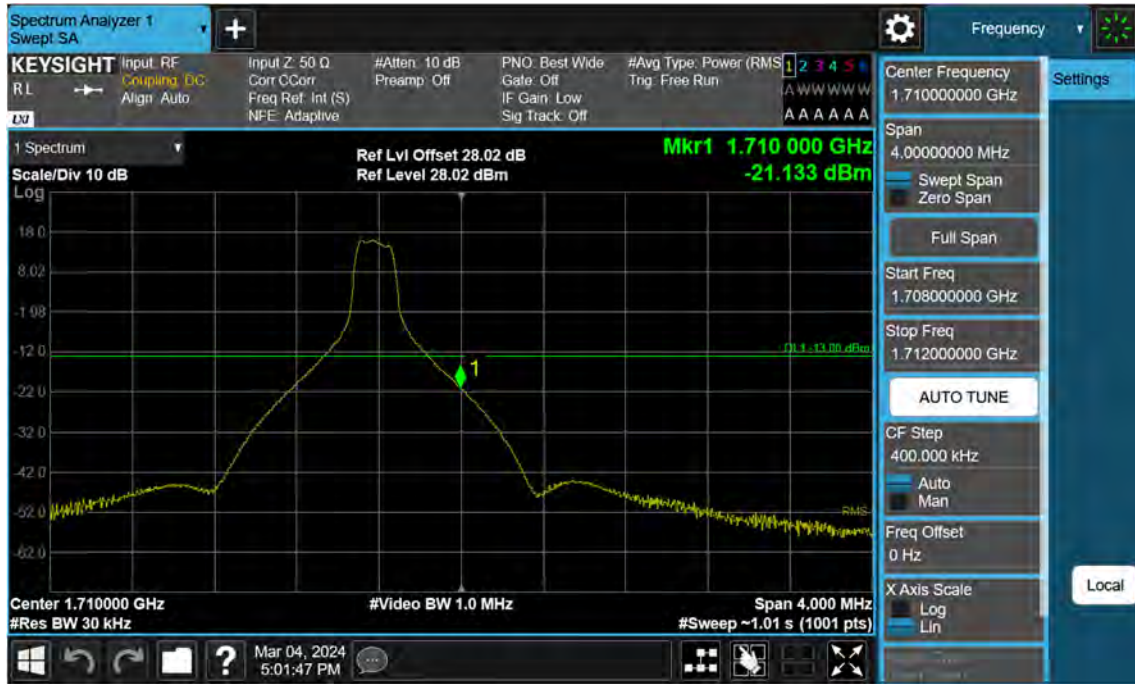

NR70\_10 M\_Band Edge\_High\_BPSK\_FullRB






NR70\_10 M\_Extended Band Edge\_High\_BPSK\_FullRB



### NR70\_15 M\_Band Edge\_Low\_BPSK\_1RB

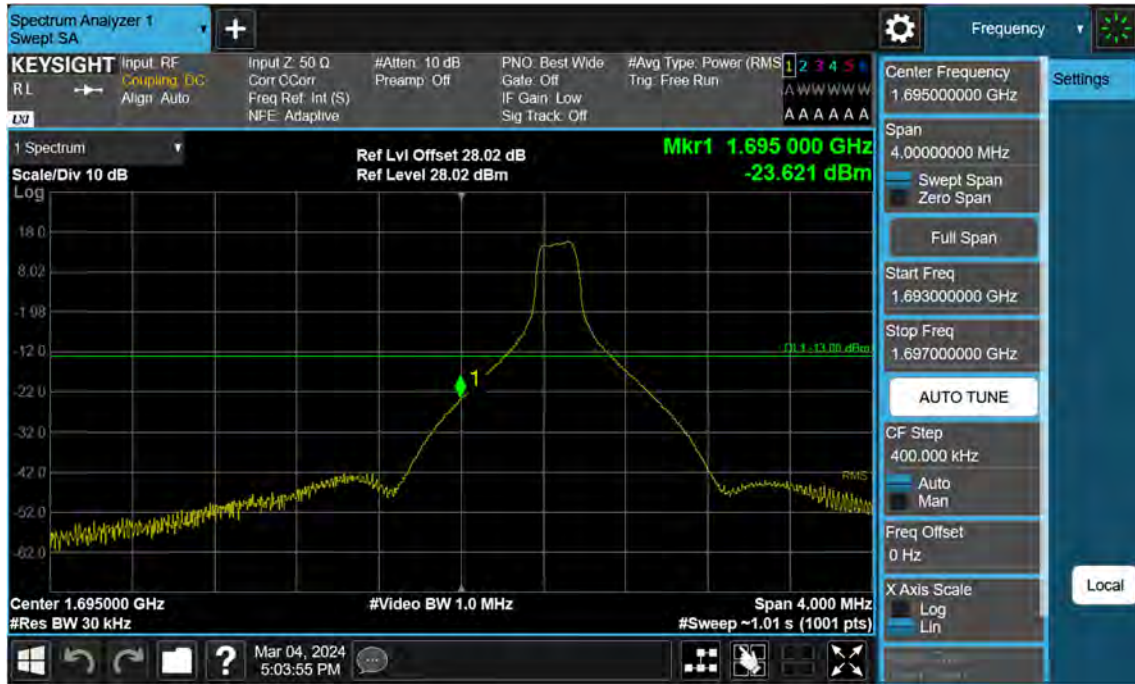


NR70\_15 M\_Band Edge\_Low\_BPSK\_FullRB






NR70\_15 M\_Extended Band Edge\_Low\_BPSK\_FullRB

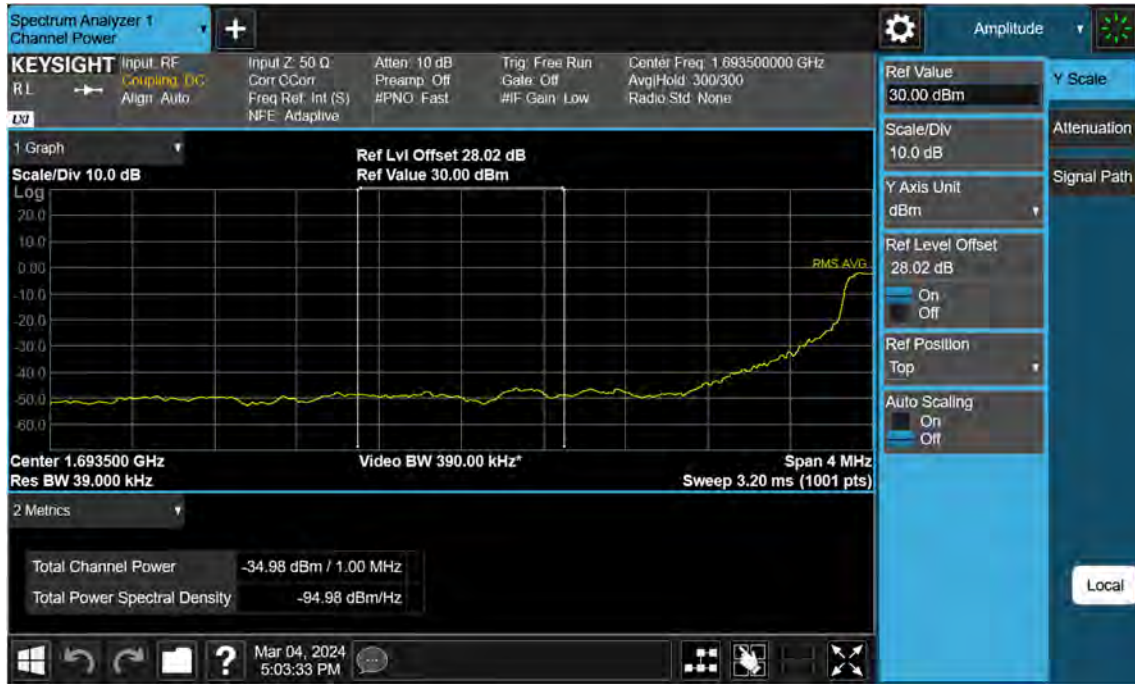

NR70\_15 M\_Band Edge\_High\_BPSK\_1RB

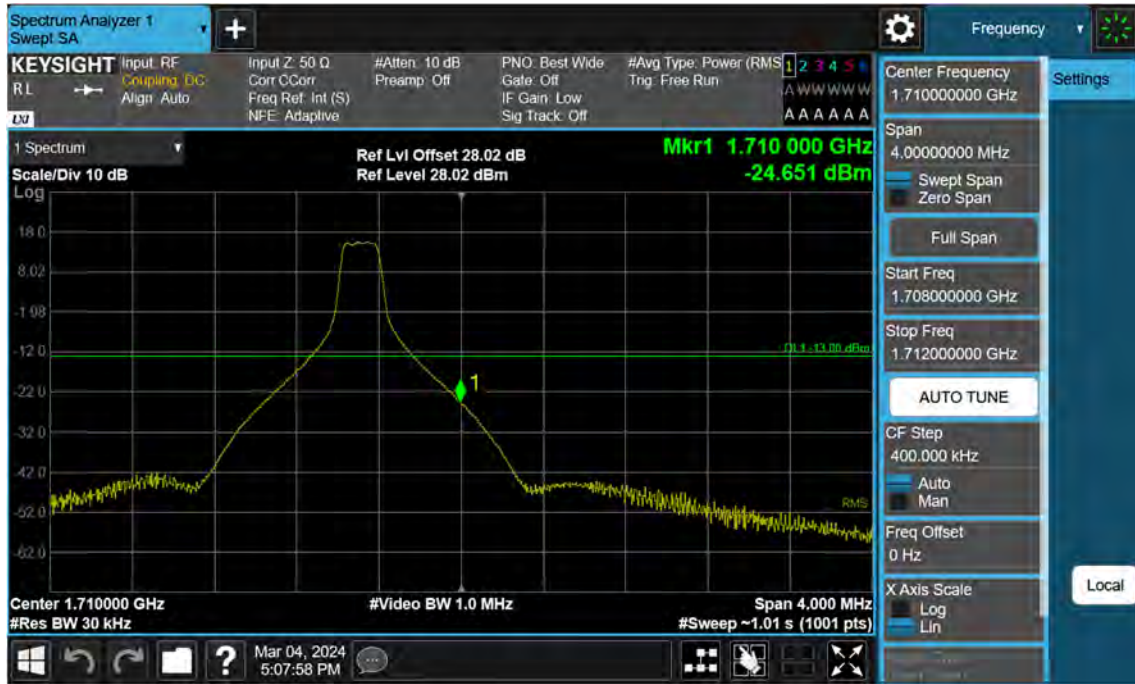

NR70\_15 M\_Band Edge\_High\_BPSK\_FullRB



NR70\_15 M\_Extended Band Edge\_High\_BPSK\_FullRB



## 12. TEST PLOTS (ANT I)

NR70\_5 M\_PAR\_Mid\_BPSK\_FullRB





NR70\_5 M\_PAR\_Mid\_QPSK\_FullRB




NR70\_5 M\_PAR\_Mid\_16QAM\_FullRB





NR70\_5 M\_PAR\_Mid\_64QAM\_FullRB

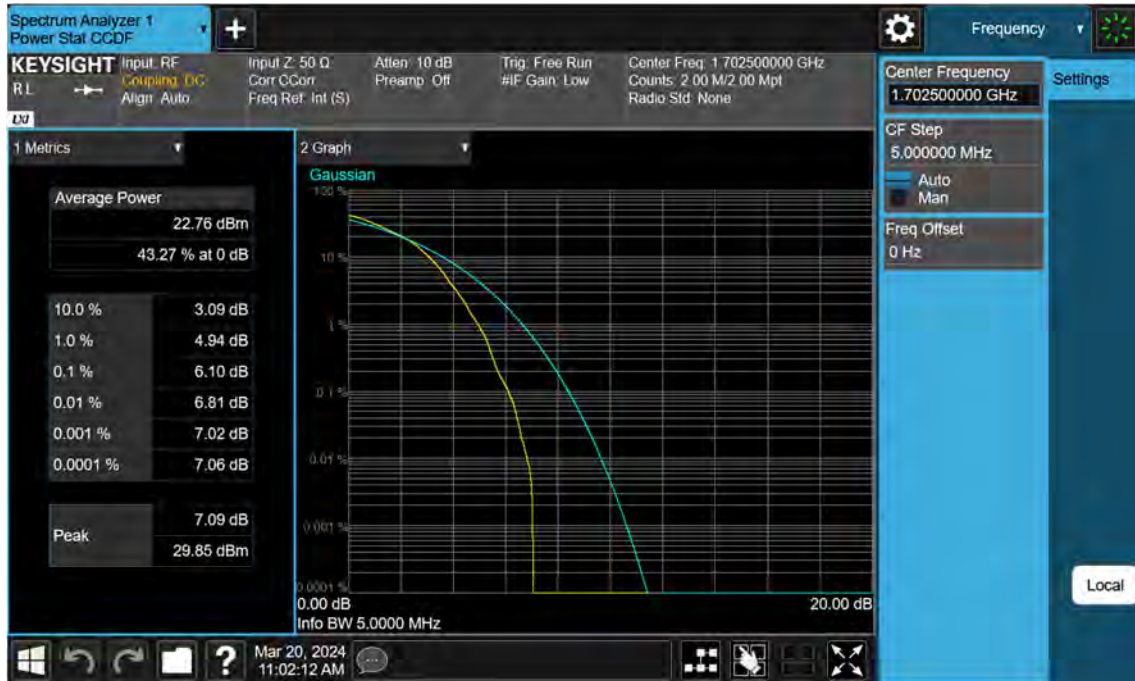

NR70\_5 M\_PAR\_Mid\_256QAM\_FullRB




NR70\_10 M\_PAR\_Mid\_BPSK\_FullIRB



NR70\_10 M\_PAR\_Mid\_QPSK\_FullRB



NR70\_10 M\_PAR\_Mid\_16QAM\_FullRB

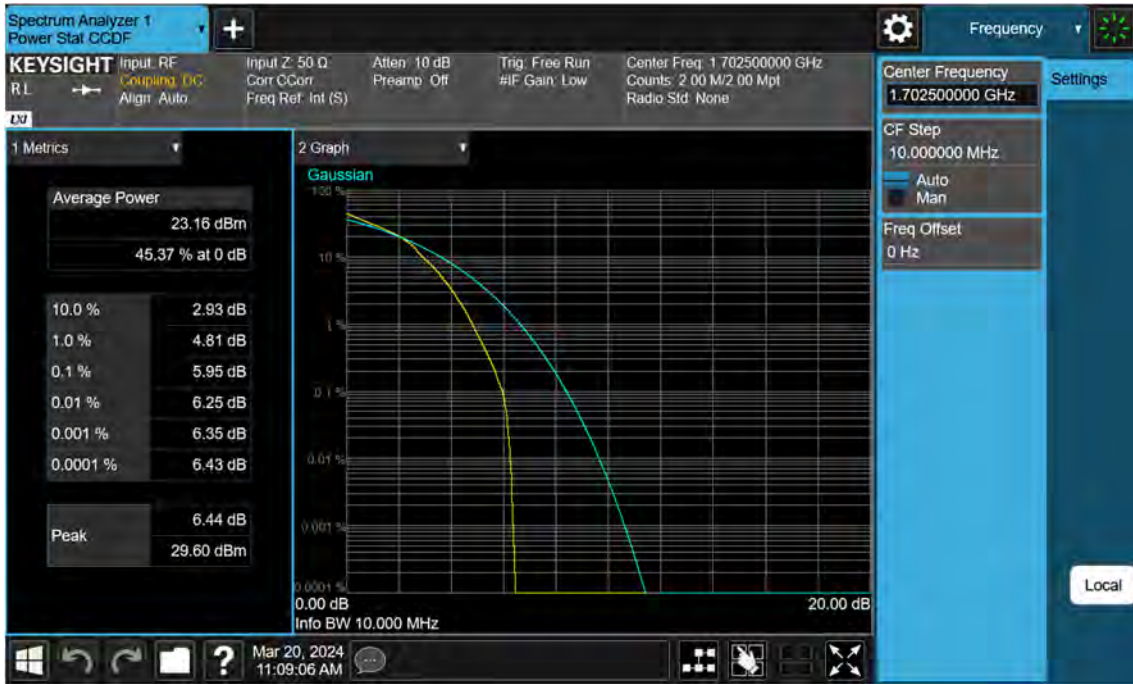

NR70\_10 M\_PAR\_Mid\_64QAM\_FullRB





NR70\_10 M\_PAR\_Mid\_256QAM\_FullRB





NR70\_15 M\_PAR\_Mid\_BPSK\_FullIRB



NR70\_15 M\_PAR\_Mid\_QPSK\_FullRB



NR70\_15 M\_PAR\_Mid\_16QAM\_FullRB



NR70\_15 M\_PAR\_Mid\_64QAM\_FullRB



NR70\_15 M\_PAR\_Mid\_256QAM\_FullRB



NR70\_5 M\_OBW\_Mid\_BPSK\_FullIRB





NR70\_5 M\_OBW\_Mid\_QPSK\_FullRB






NR70\_5 M\_OBW\_Mid\_16QAM\_FullRB



NR70\_5 M\_OBW\_Mid\_64QAM\_FullRB

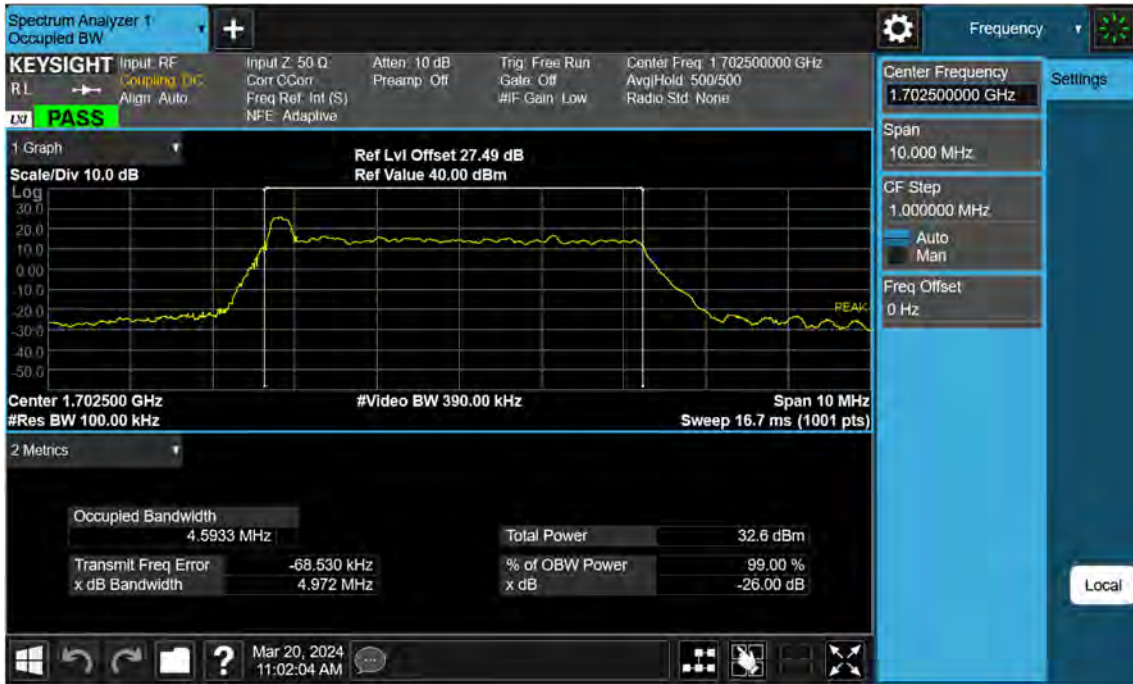

NR70\_5 M\_OBW\_Mid\_256QAM\_FullRB



NR70\_10 M\_OBW\_Mid\_BPSK\_FullRB



NR70\_10 M\_OBW\_Mid\_QPSK\_FullRB




NR70\_10 M\_OBW\_Mid\_16QAM\_FullRB






NR70\_10 M\_OBW\_Mid\_64QAM\_FullRB

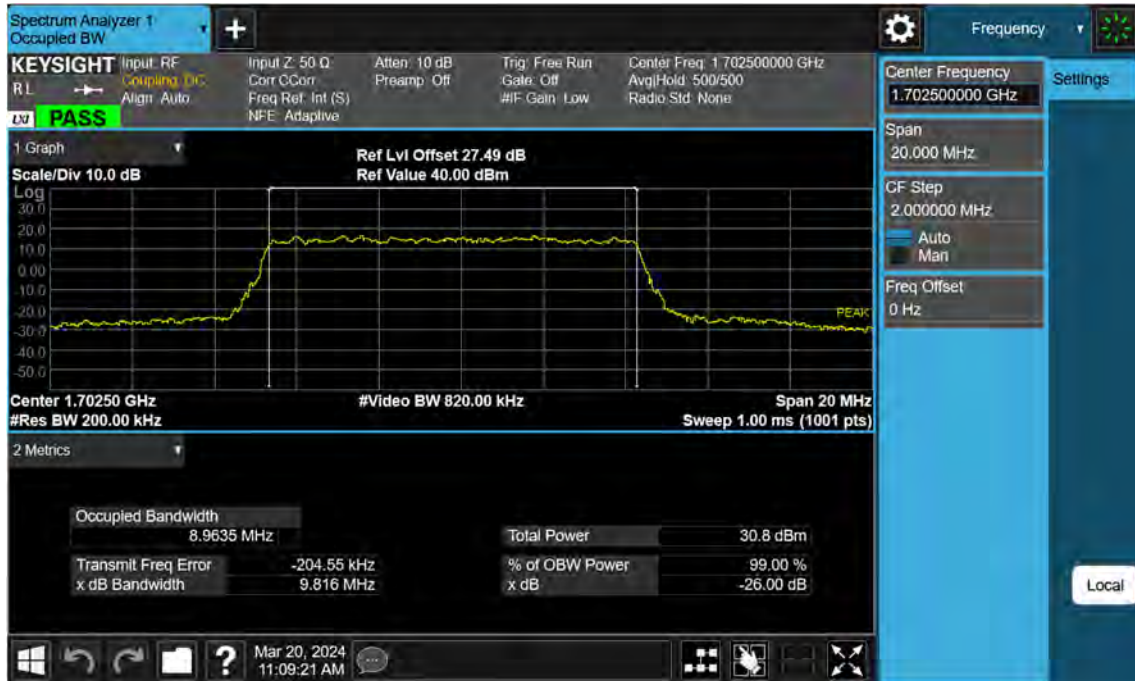



NR70\_10 M\_OBW\_Mid\_256QAM\_FullRB

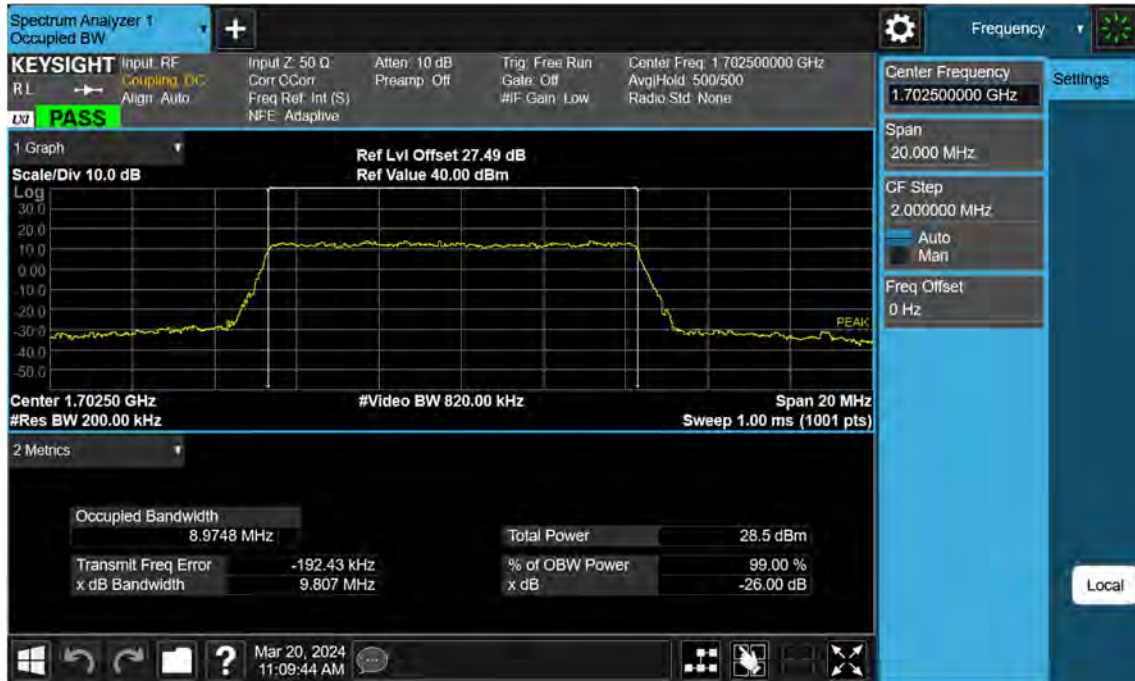


NR70\_15 M\_OBW\_Mid\_BPSK\_FullRB



NR70\_15 M\_OBW\_Mid\_QPSK\_FullRB



NR70\_15 M\_OBW\_Mid\_16QAM\_FullRB

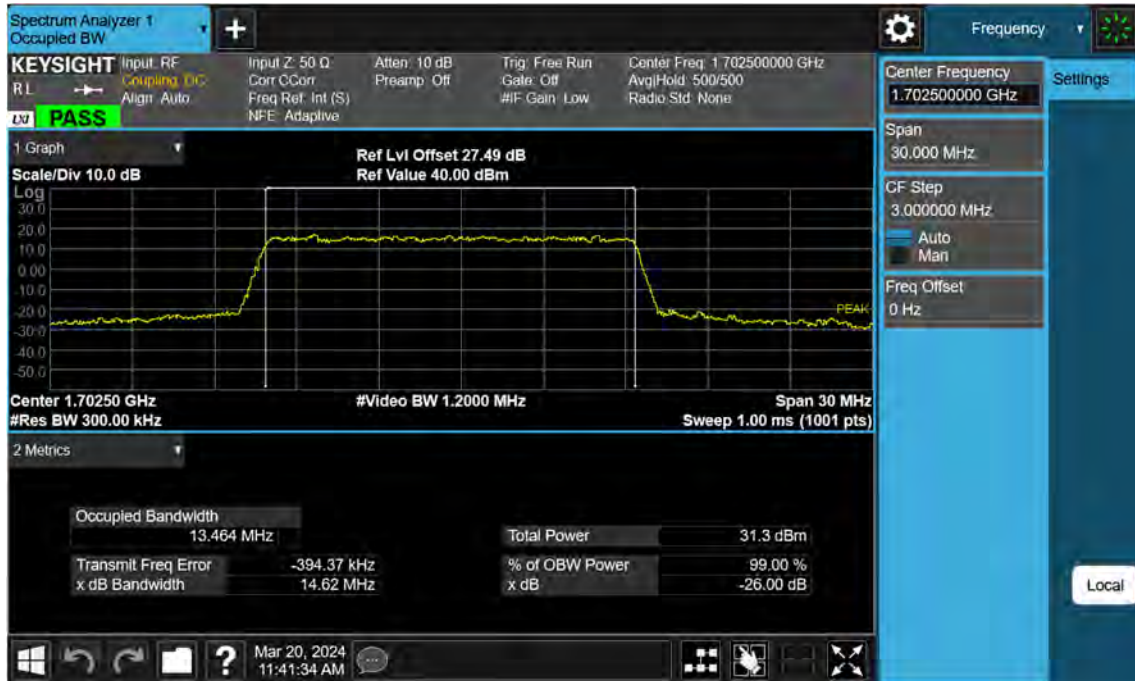

NR70\_15 M\_OBW\_Mid\_64QAM\_FullRB




NR70\_15 M\_OBW\_Mid\_256QAM\_FullRB






NR70\_5 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

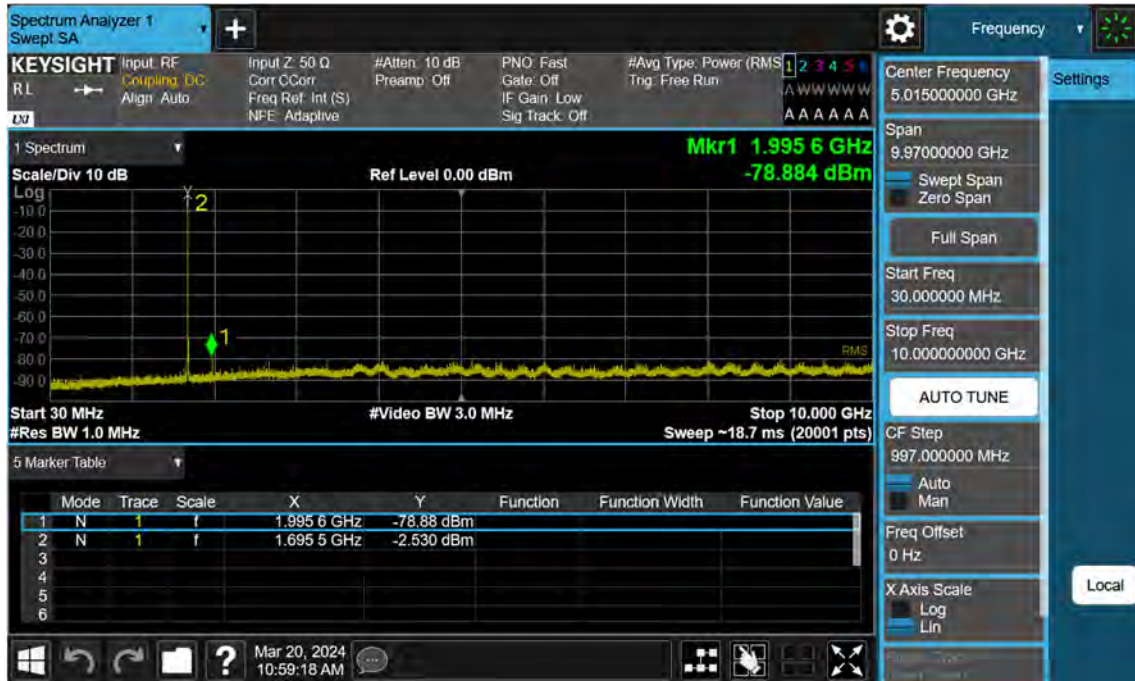





NR70\_5 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullRB

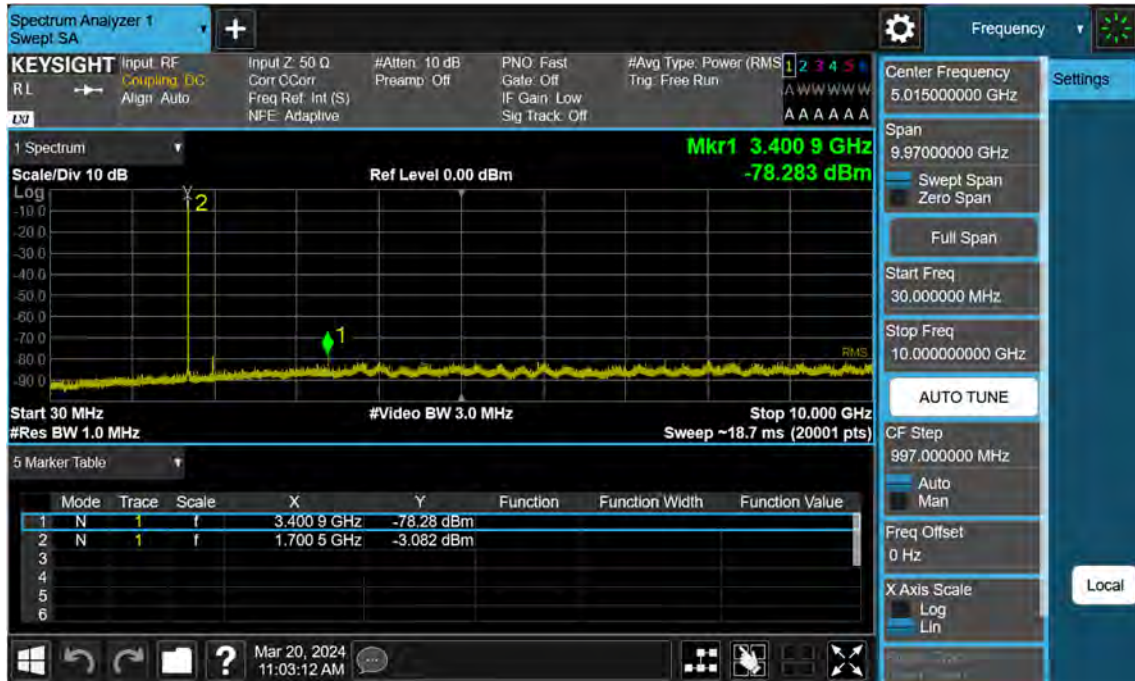


NR70\_5 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

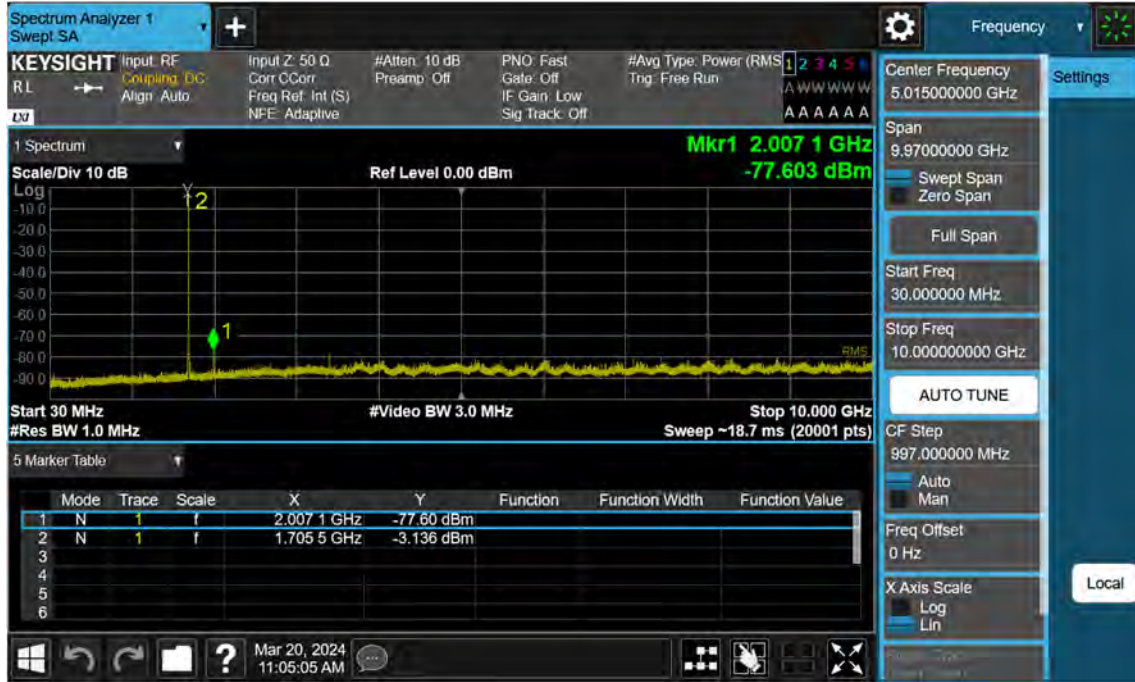


NR70\_10 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

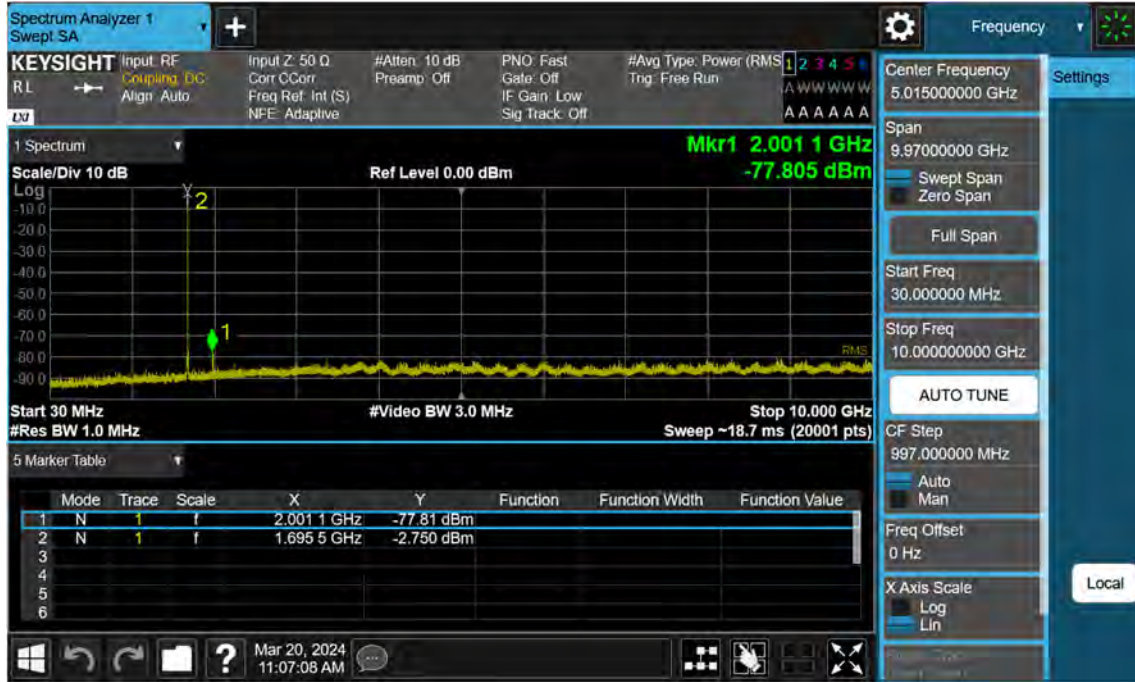

NR70\_10 M\_Conducted Spurious(30 M-10 G)\_Mid\_BPSK\_FullIRB

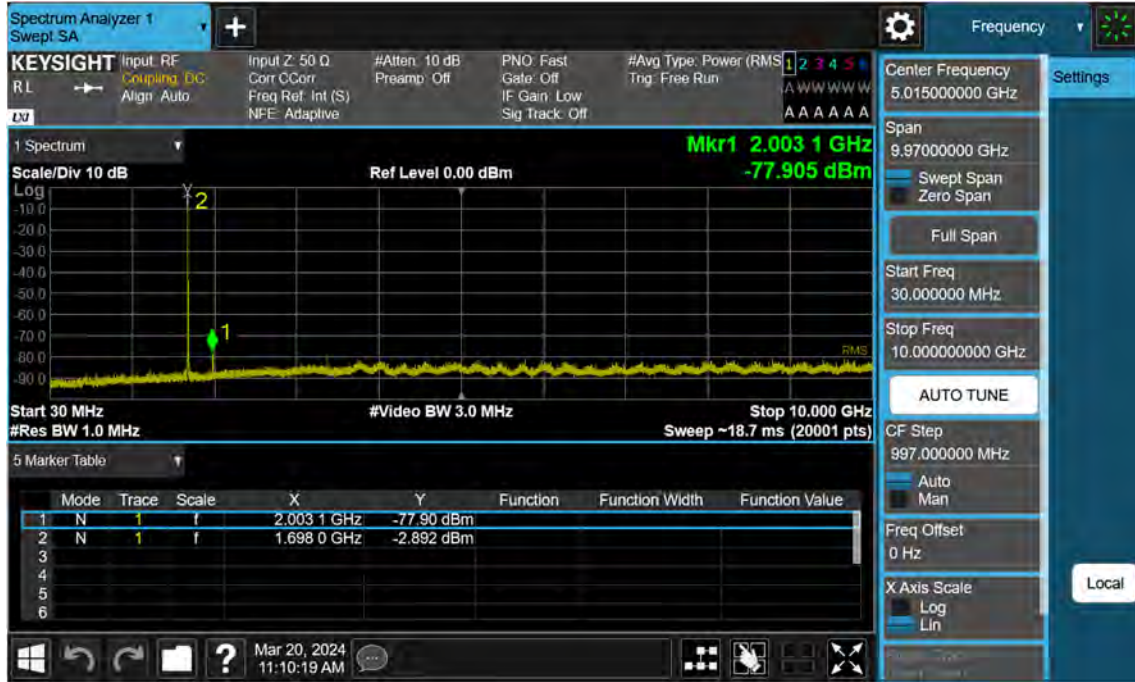


NR70\_10 M\_Conducted Spurious(30 M-10 G)\_High\_BPSK\_1RB

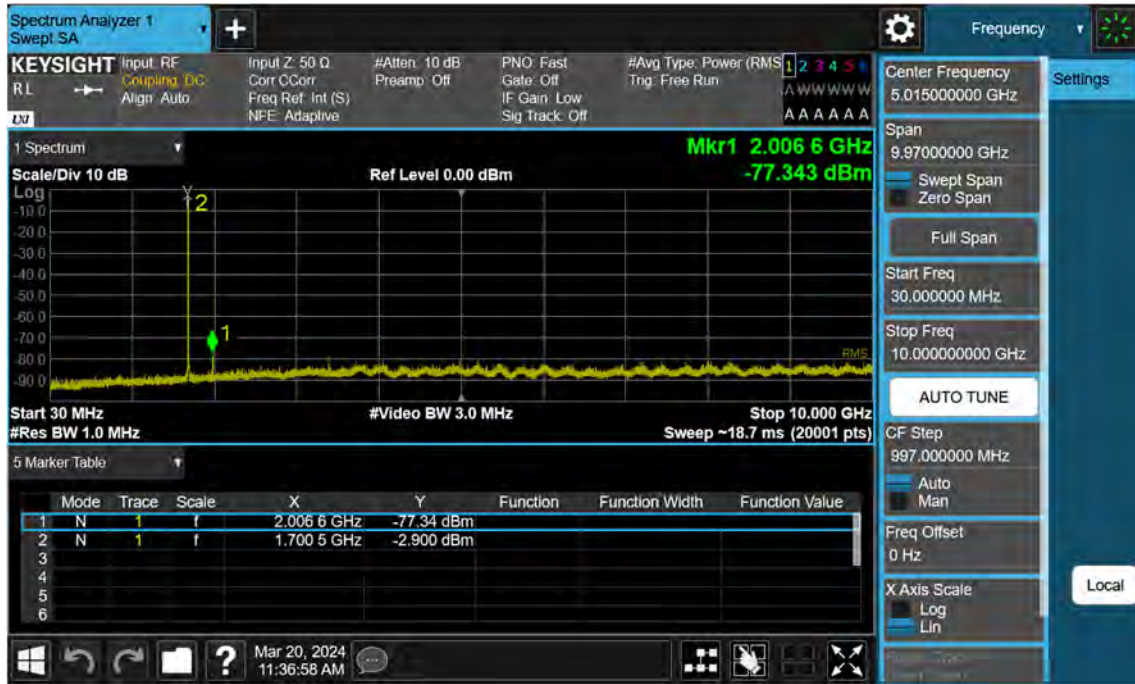




NR70\_15 M\_Conducted Spurious(30 M-10 G)\_Low\_BPSK\_1RB

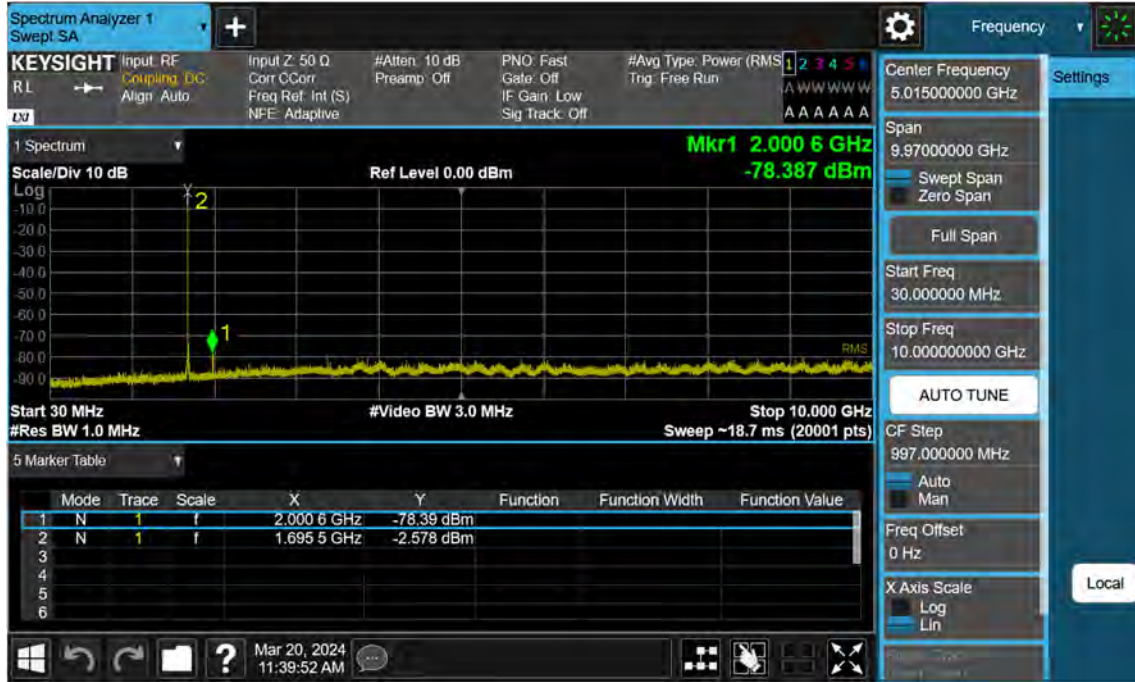


NR70\_5 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

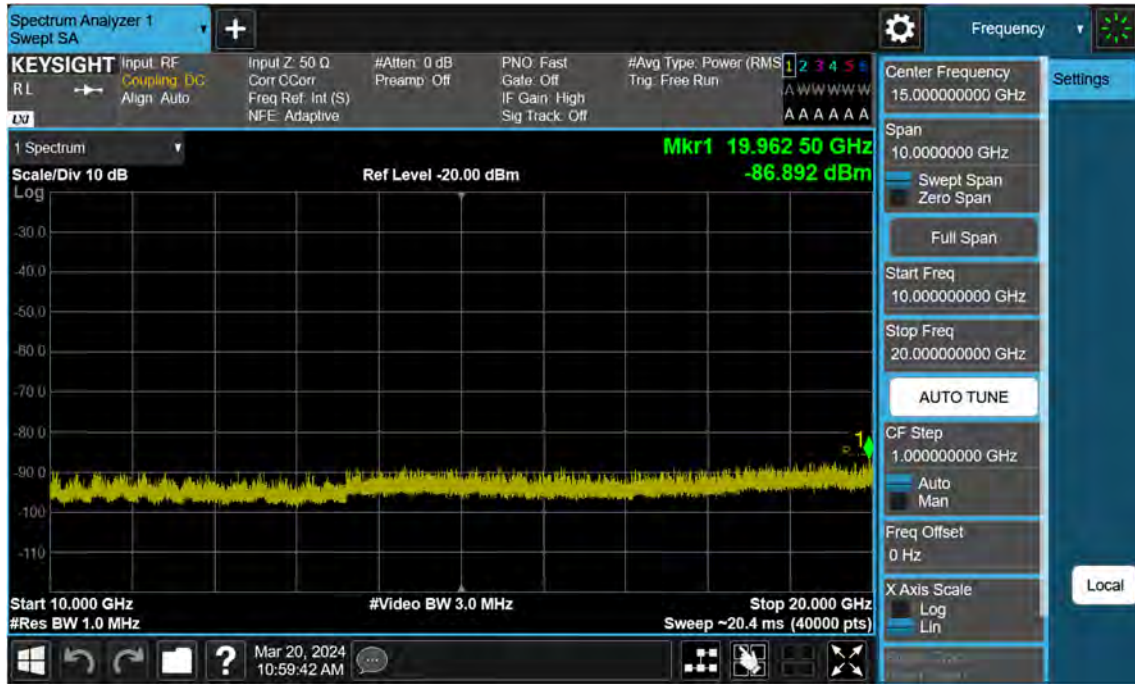





NR70\_5 M\_Conducted Spurious(Above10 G)\_Mid\_BPSK\_FullRB

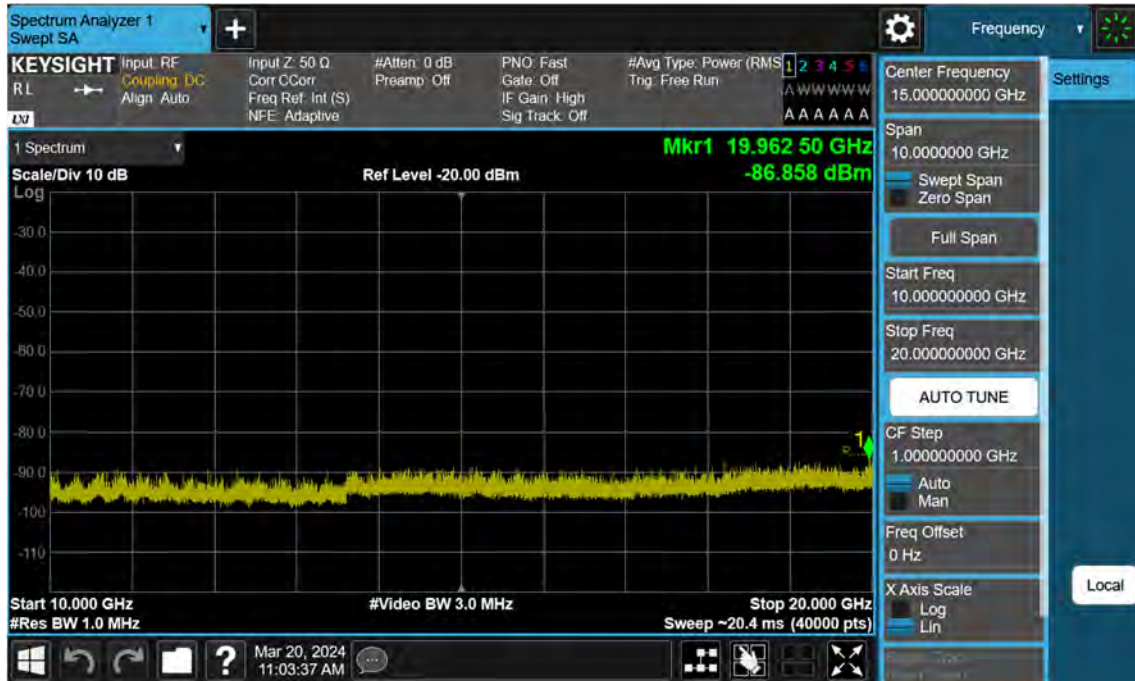


NR70\_5 M\_Conducted Spurious(Above10 G)\_High\_BPSK\_1RB

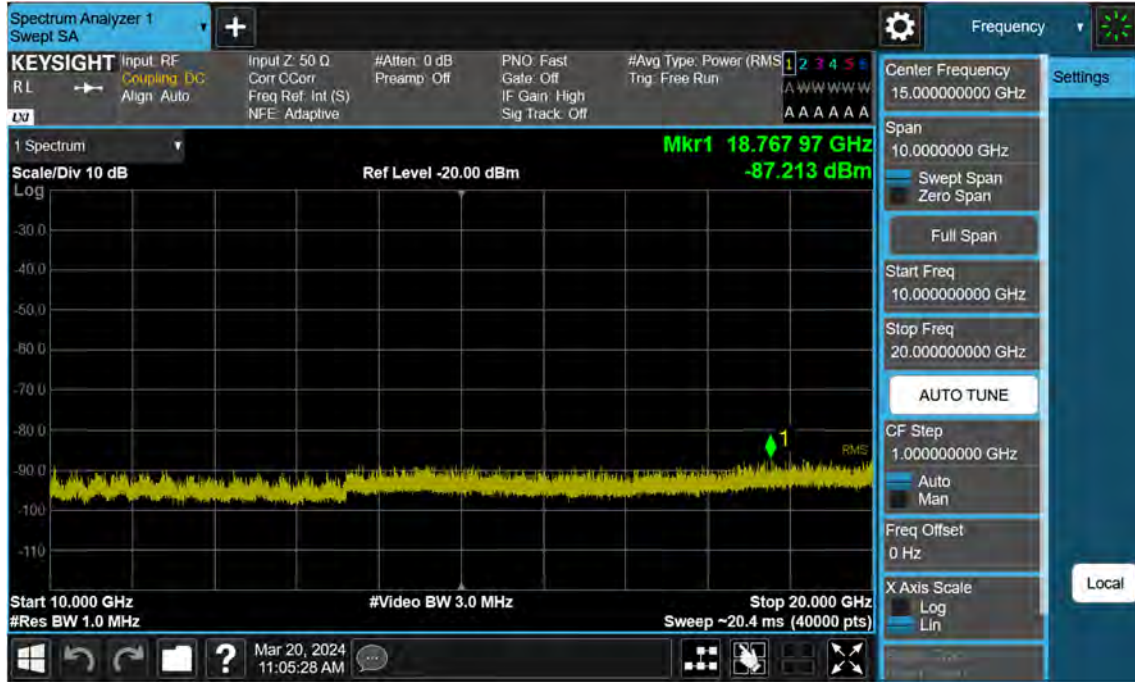


NR70\_10 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

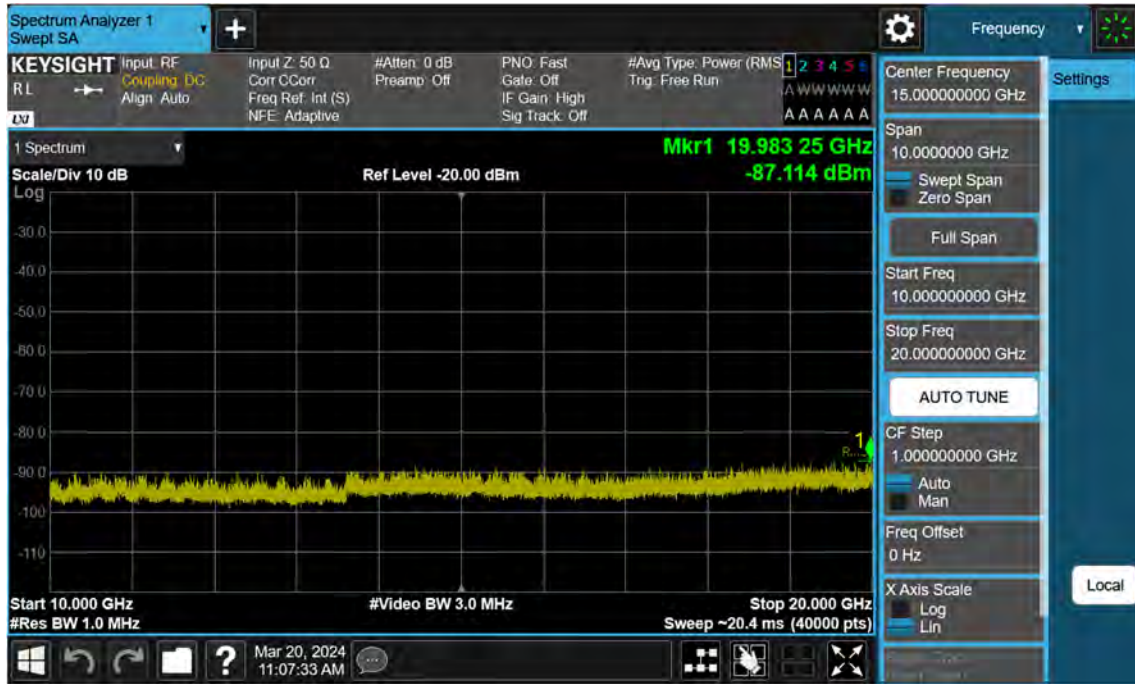

NR70\_10 M\_Conducted Spurious(Above10 G)\_Mid\_BPSK\_FullIRB

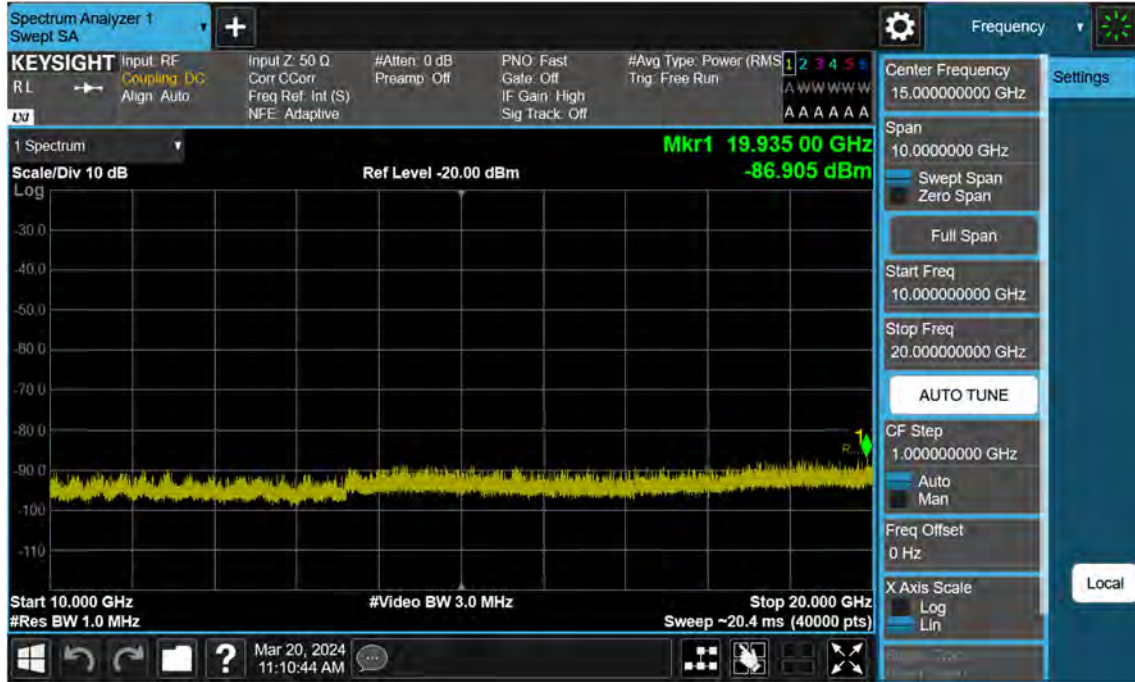


NR70\_10 M\_Conducted Spurious(Above10 G)\_High\_BPSK\_1RB

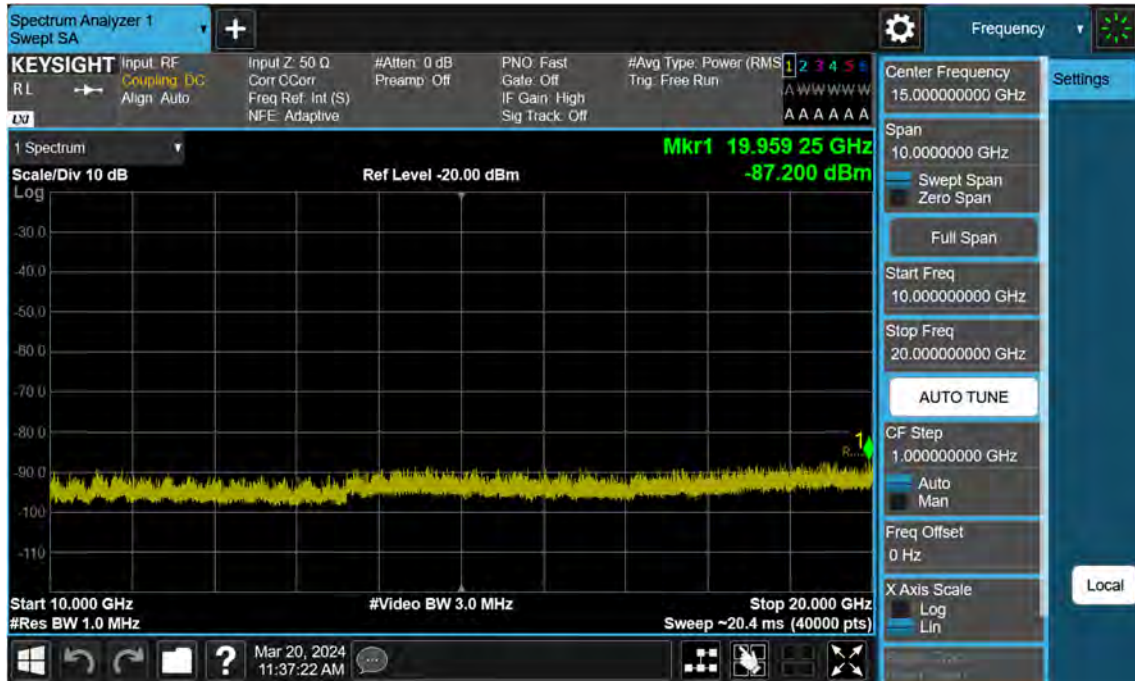




NR70\_15 M\_Conducted Spurious(Above10 G)\_Low\_BPSK\_1RB

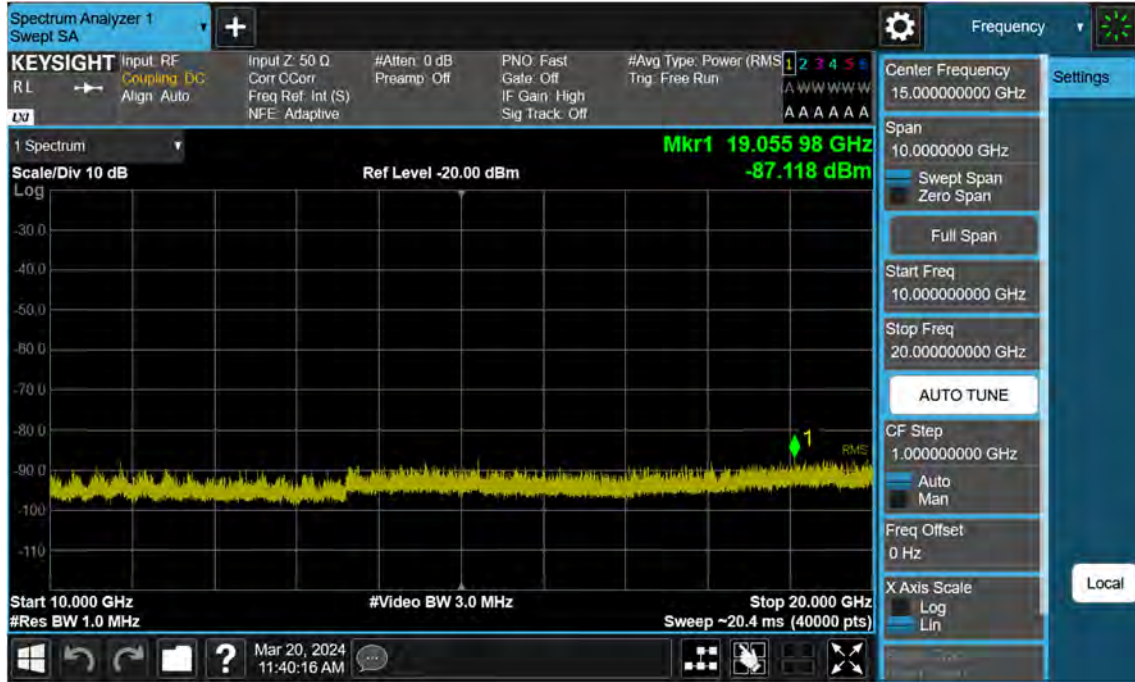

NR70\_5 M\_Band Edge\_Low\_BPSK\_1RB

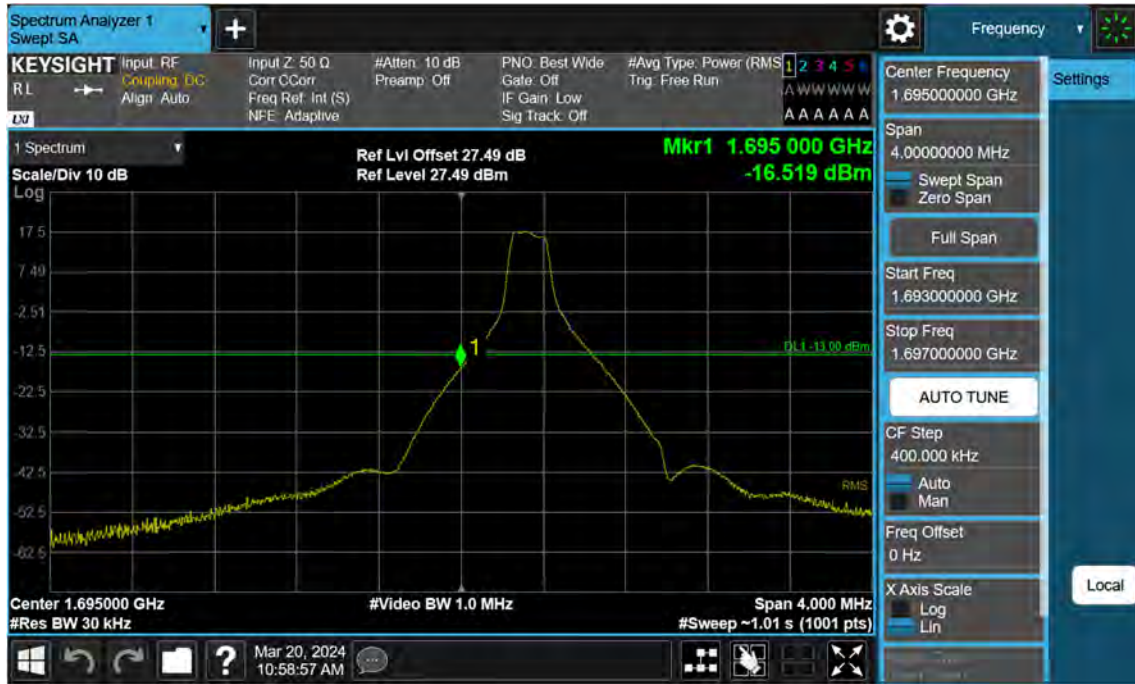





NR70\_5 M\_Band Edge\_Low\_BPSK\_FullRB



NR70\_5 M\_Extended Band Edge\_Low\_BPSK\_FullRB

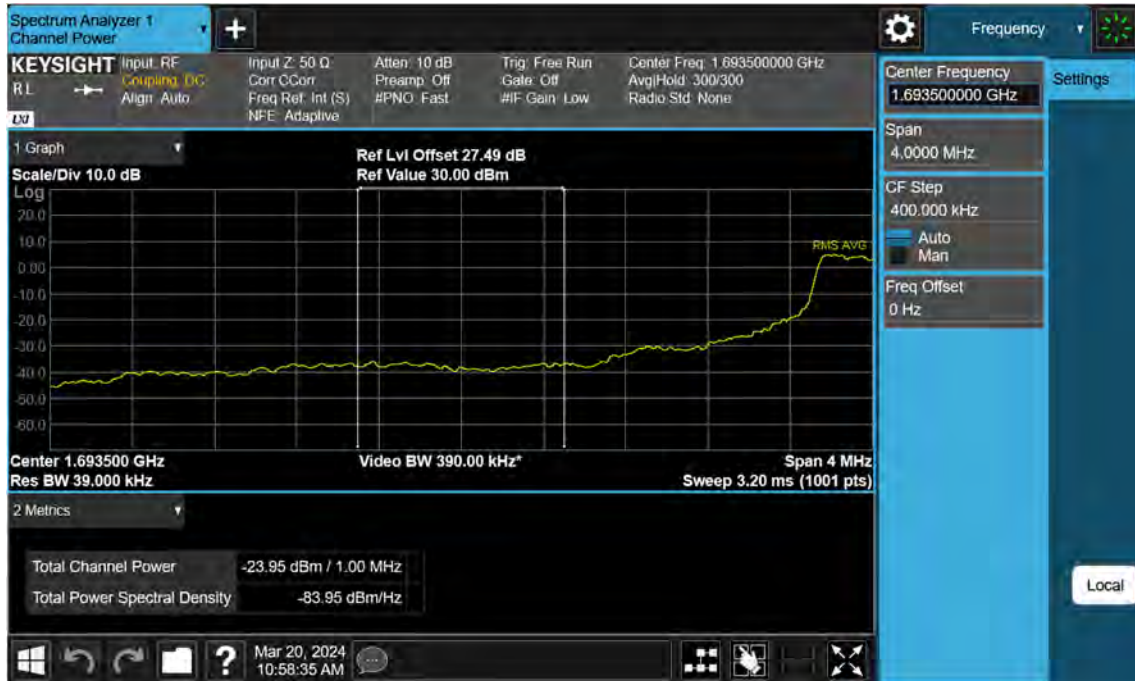


NR70\_5 M\_Band Edge\_High\_BPSK\_1RB

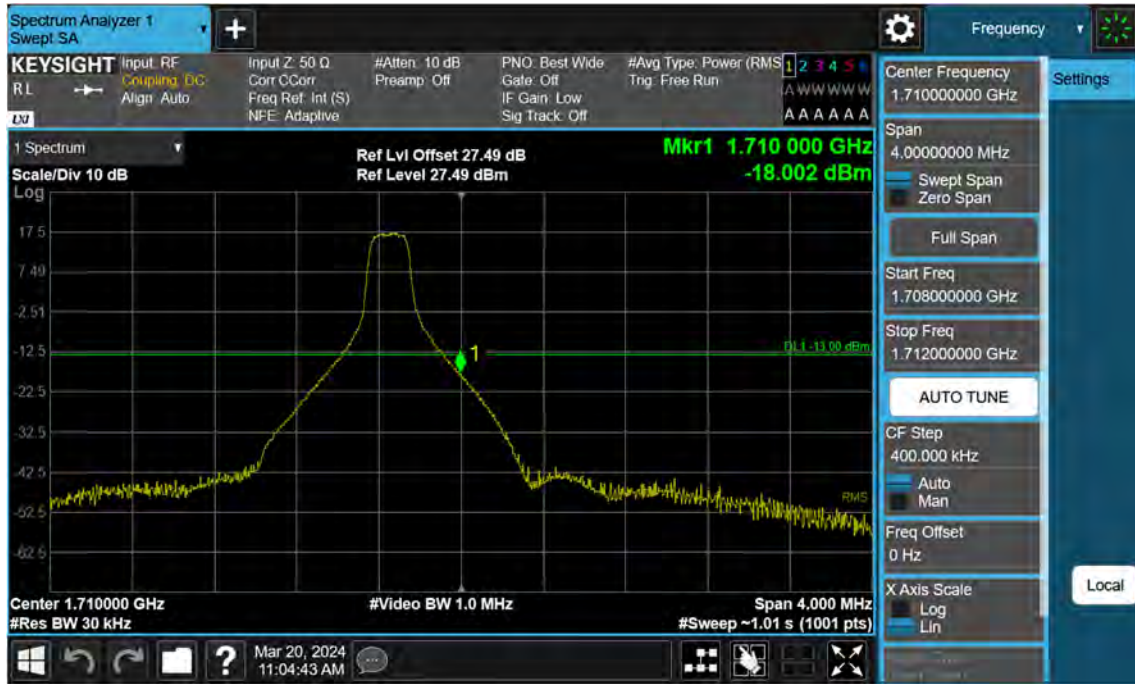

NR70\_5 M\_Band Edge\_High\_BPSK\_FullRB




NR70\_5 M\_Extended Band Edge\_High\_BPSK\_FullRB

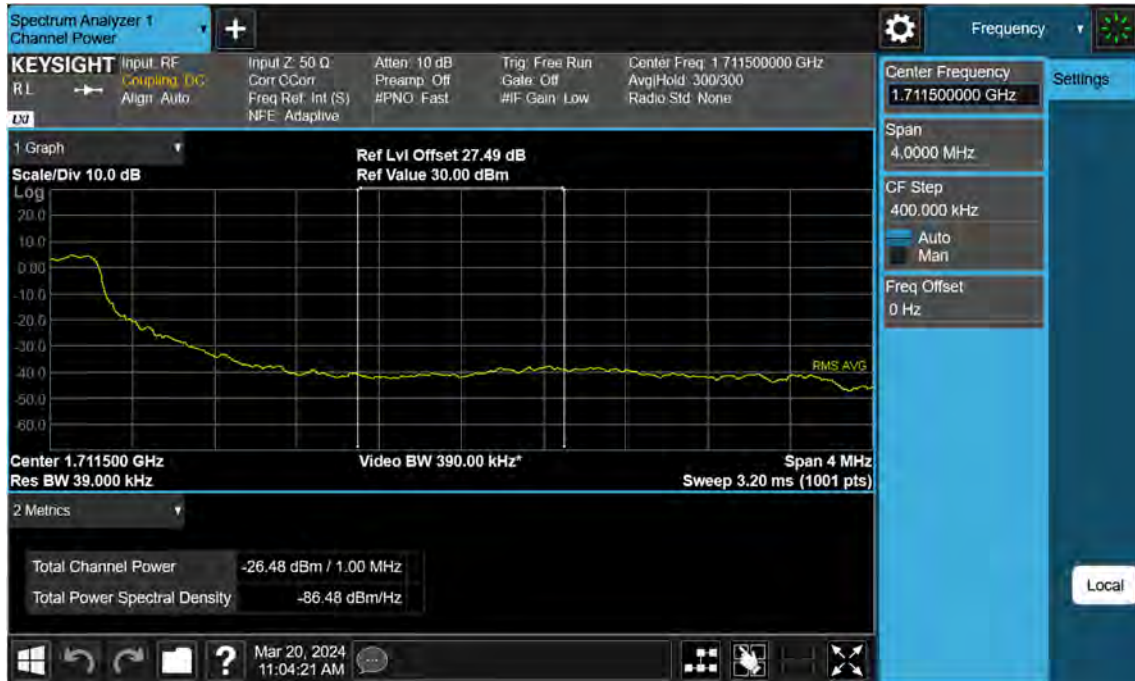



NR70\_10 M\_Band Edge\_Low\_BPSK\_1RB

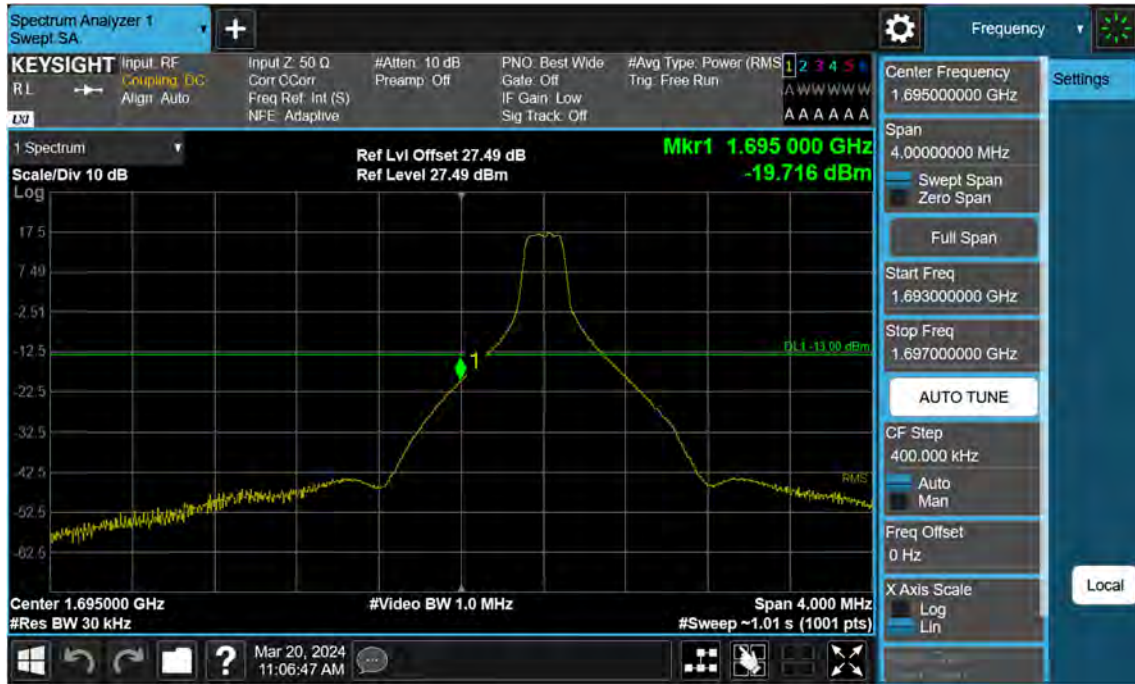


NR70\_10 M\_Band Edge\_Low\_BPSK\_FullRB






NR70\_10 M\_Extended Band Edge\_Low\_BPSK\_FullRB

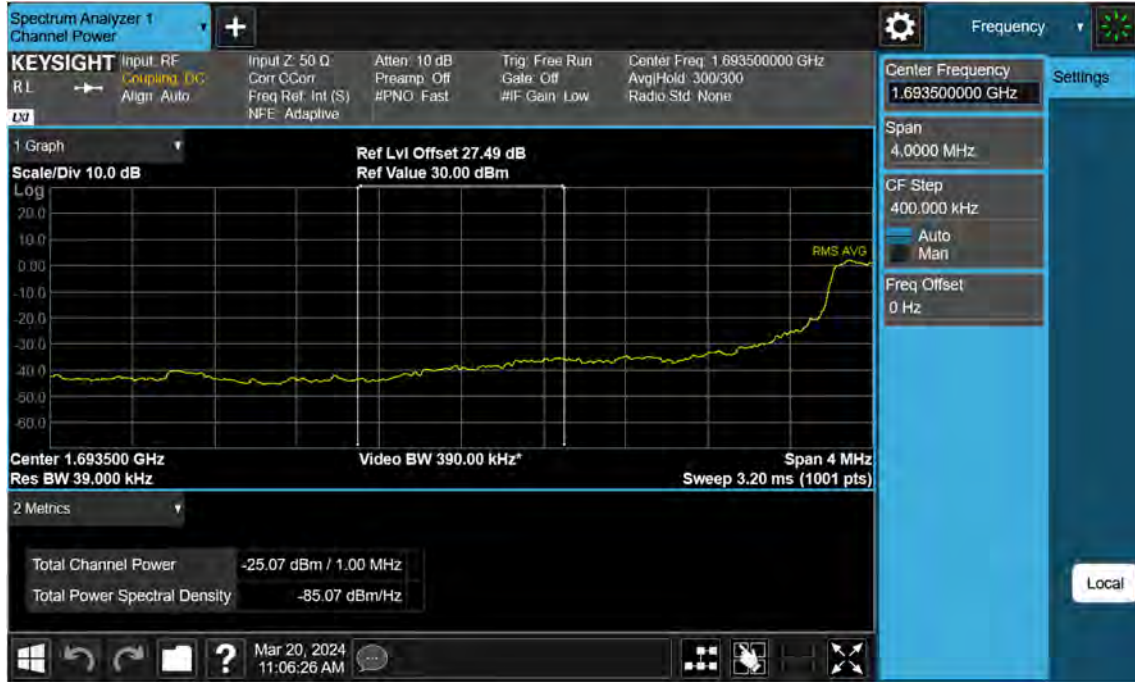


NR70\_10 M\_Band Edge\_High\_BPSK\_1RB

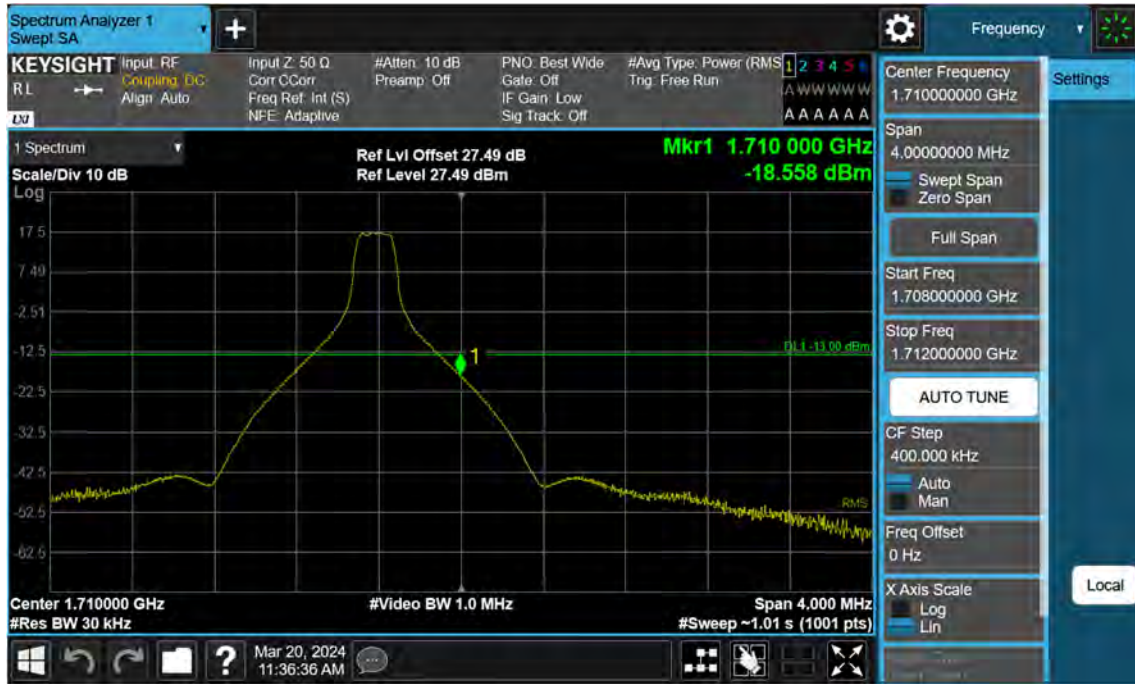


NR70\_10 M\_Band Edge\_High\_BPSK\_FullRB



NR70\_10 M\_Extended Band Edge\_High\_BPSK\_FullRB

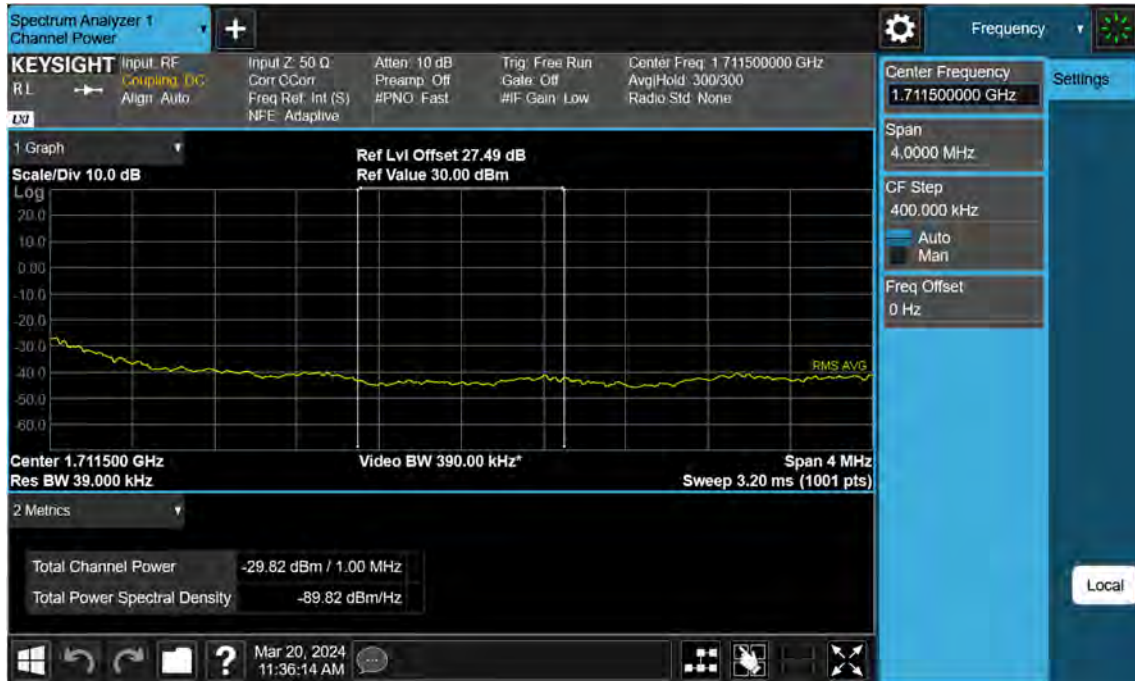

NR70\_15 M\_Band Edge\_Low\_BPSK\_1RB

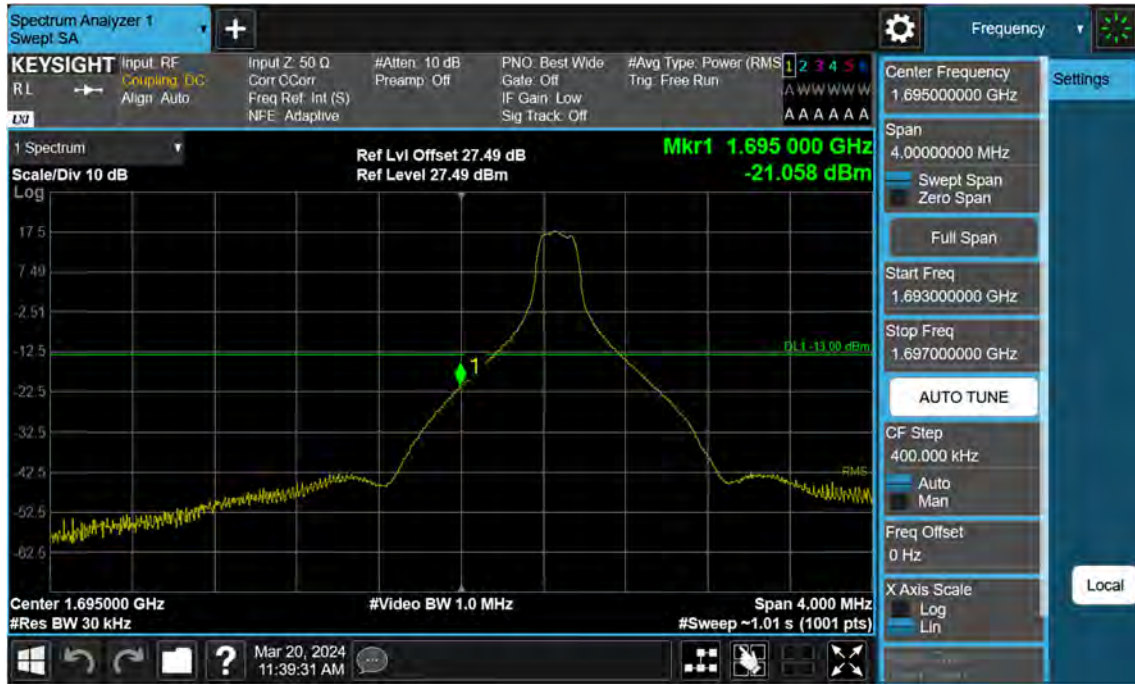




NR70\_15 M\_Band Edge\_Low\_BPSK\_FullRB




NR70\_15 M\_Extended Band Edge\_Low\_BPSK\_FullRB

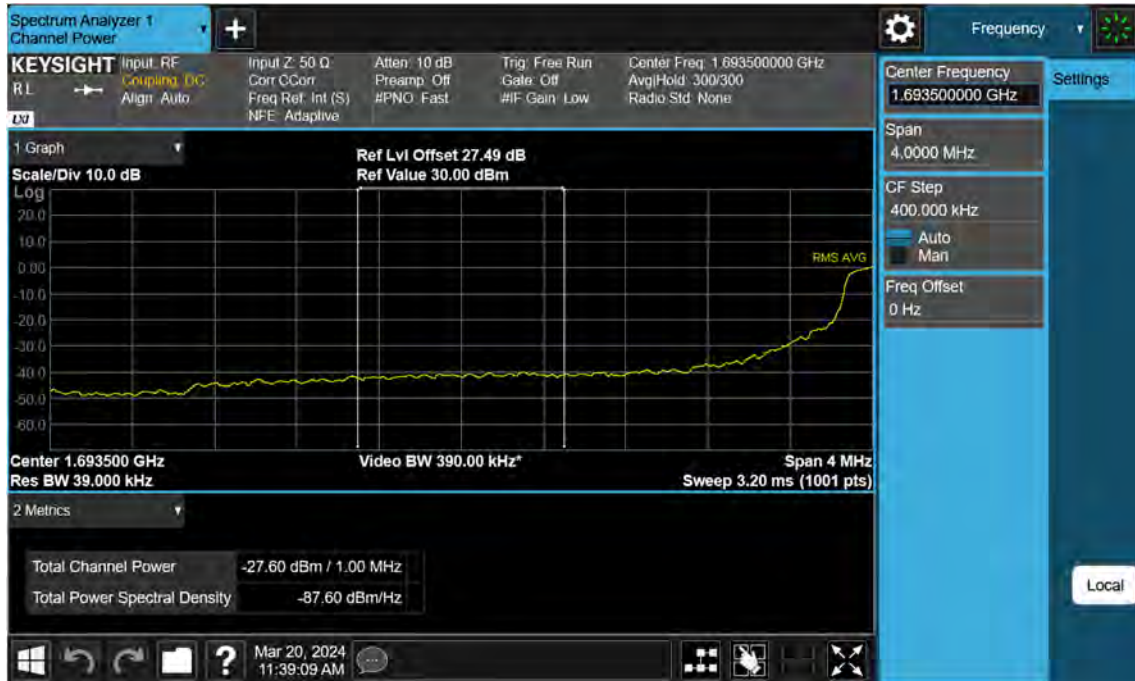



NR70\_15 M\_Band Edge\_High\_BPSK\_1RB

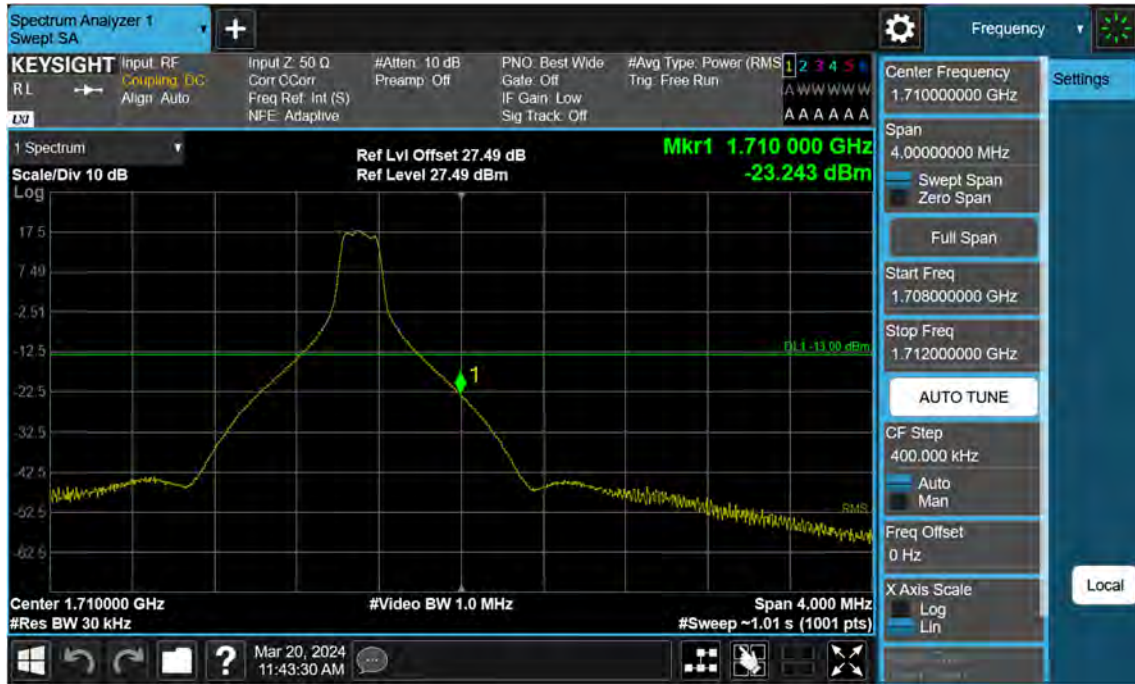

NR70\_15 M\_Band Edge\_High\_BPSK\_FullRB



NR70\_15 M\_Extended Band Edge\_High\_BPSK\_FullRB



### 13. ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2404-FC034-P