



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctest.com



## MEASUREMENT REPORT FCC PART 15.407 UNII 802.11ax OFDMA

**Applicant Name:**

Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea

**Date of Testing:**

01/22- 04/05/2019

**Test Site/Location:**

PCTEST Lab. Columbia, MD, USA

**Test Report Serial No.:**

1M1902200029-08.A3L

**FCC ID:**

**A3LSMF907N**

**APPLICANT:**

**Samsung Electronics Co., Ltd.**

**Application Type:**

Certification

**Model:**

SM-F907N

**Additional Model(s):**

SM-F907N

**EUT Type:**

Portable Handset

**Frequency Range:**

5180 – 5825MHz

**FCC Classification:**

Unlicensed National Information Infrastructure (UNII)

**FCC Rule Part(s):**

Part 15 Subpart E (15.407)

**Test Procedure(s):**

ANSI C63.10-2013, KDB 789033 D02 v02r01,  
KDB 648474 D03 v01r04, KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez  
President




<b>FCC ID:</b> A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset		Page 1 of 330


# TABLE OF CONTENTS

1.0	INTRODUCTION.....	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description.....	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	8
2.4	EMI Suppression Device(s)/Modifications.....	8
3.0	DESCRIPTION OF TESTS.....	9
3.1	Evaluation Procedure.....	9
3.2	Radiated Emissions.....	9
3.3	Environmental Conditions.....	9
4.0	ANTENNA REQUIREMENTS.....	10
5.0	MEASUREMENT UNCERTAINTY.....	11
6.0	TEST EQUIPMENT CALIBRATION DATA.....	12
7.0	TEST RESULTS.....	13
7.1	Summary.....	13
7.2	26dB Bandwidth Measurement – 802.11ax OFDMA.....	15
7.3	6dB Bandwidth Measurement – 802.11ax OFDMA.....	64
7.4	UNII Output Power Measurement – 802.11ax OFDMA.....	81
7.5	Maximum Power Spectral Density – 802.11ax OFDMA.....	101
7.6	Radiated Spurious Emission Measurements – Above 1GHz.....	225
6.6.1	SISO Antenna-1 Radiated Spurious Emission Measurements.....	228
6.6.2	SISO Antenna-2 Radiated Spurious Emission Measurements.....	246
6.6.3	MIMO Radiated Spurious Emission Measurements.....	266
6.6.4	SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW).....	288
6.6.5	SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW).....	292
6.6.6	SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW).....	296
6.6.7	SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW).....	300
6.6.8	SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW).....	304
6.6.9	SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW).....	308
6.6.10	MIMO Radiated Band Edge Measurements (20MHz BW).....	312
6.6.11	MIMO Radiated Band Edge Measurements (40MHz BW).....	316
6.6.12	MIMO Radiated Band Edge Measurements (80MHz BW).....	320
7.7	Radiated Spurious Emissions Measurements – Below 1GHz.....	324
8.0	CONCLUSION.....	330

<b>FCC ID:</b> A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 2 of 330



# MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	39.355	15.95	38.726	15.88	37.120	15.70
2A		5260 - 5320	39.628	15.98	38.726	15.88	39.708	15.99
2C		5500 - 5720	39.628	15.98	39.719	15.99	38.931	15.90
3		5745 - 5825	38.815	15.89	39.719	15.99	39.759	15.99
1	40	5190 - 5230	25.061	13.99	24.774	13.94	23.776	13.76
2A		5270 - 5310	24.946	13.97	24.099	13.82	25.063	13.99
2C		5510 - 5710	25.061	13.99	25.061	13.99	25.067	13.99
3		5755 - 5795	25.003	13.98	25.061	13.99	24.785	13.94
1	80	5210	19.907	12.99	19.907	12.99	19.828	12.97
2A		5290	19.679	12.94	19.861	12.98	19.886	12.99
2C		5530 - 5690	19.907	12.99	19.907	12.99	19.764	12.96
3		5775	19.907	12.99	19.907	12.99	19.862	12.98

## EUT Overview

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 3 of 330	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

## 1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

## 1.3 Test Facility / Accreditations

**Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.**

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

<b>FCC ID:</b> A3LSMF907N	 <b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 4 of 330

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF907N**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

**Test Device Serial No.:** 1101M, 1108M, 1105M, 1099M, 2166M, 2219M

### 2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11a / 802.11n / 802.11ac / 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11n / 802.11ac / 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ac / 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 5 of 330	

**Notes:**

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Tone	Duty Cycle
		[MHz]		
802.11ax NII RU	1	20	26T	99.4
			52T	99.6
			106T	99.2
			242T	99.1
802.11ax NII RU	2	20	26T	99.1
			52T	99.4
			106T	99.7
			242T	99.8
802.11ax RU NII	MIMO SDM	20	26T	99.7
			52T	99.3
			106T	99.2
			242T	99.1
802.11ax NII RU	1	40	26T	99.4
			52T	99.6
			106T	99.2
			242T	99.1
802.11ax NII RU	2	40	484T	99.1
			26T	99.5
			52T	99.7
			106T	99.2
802.11ax NII RU	2	40	242T	99.1
			484T	99.1
			26T	99.6
			52T	99.3
802.11ax RU NII	MIMO SDM	40	106T	99.2
			242T	99.1
			484T	99.1
			26T	99.4
802.11ax NII RU	1	80	52T	99.6
			106T	99.2
			242T	99.1
			484T	99.1
			996T	99.0
802.11ax NII RU	2	80	26T	99.4
			52T	99.6
			106T	99.2
			242T	99.2
			484T	99.1
802.11ax RU NII	MIMO SDM	80	996T	99.0
			26T	99.6
			52T	99.3
			106T	99.2
			242T	99.1
802.11ax RU NII	MIMO SDM	80	484T	99.1
			996T	99.0
			26T	99.6
			52T	99.3
			106T	99.2

**Table 2-4. Measured Duty Cycles**

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 6 of 330	

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		CDD/MIMO	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11a	✓	✓	✗	✗	✓	✓
	11n/ac/ax (20MHz)	✓	✓	✓	✓	✓	✓
	11n/ac/ax (40MHz)	✓	✓	✓	✓	✓	✓
	11ac/ax (80MHz)	✓	✓	✓	✓	✓	✓

**Table 2-5. Frequency / Channel Operations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

**CDD** = Cyclic Delay Diversity - 2Tx Function

3. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz (WLAN & BT) and 5GHz bands simultaneously on each antenna. The following tables show the worst case configurations determined during testing. The data for these configurations is contained in this test report. The BT + 5GHz case is not considered as worst case since the BT power is lower than the 2.4GHz WLAN power.

**Configuration 1:** ANT1 transmitting in 2.4GHz mode and ANT2 in 5GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	6	48
Operating Frequency (MHz)	2437	5240
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 2-6. Config-1 (ANT1 2.4GHz & ANT2 5GHz)**

**Configuration 2:** ANT1 transmitting in 5GHz mode and ANT2 in 2.4GHz mode

Description	2.4 GHz Emission	5 GHz Emission
Antenna	2	1
Channel	6	120
Operating Frequency (MHz)	2437	5600
Data Rate (Mbps)	1	6
Mode	802.11b	802.11a

**Table 2-7. Config-2 (ANT1 5GHz & ANT2 2.4GHz)**

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 7 of 330

**Configuration 3:** ANT1 and ANT2 both transmitting in 2.4GHz and 5GHz modes simultaneously

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1, 2	1, 2
Channel	11	165
Operating Frequency (MHz)	2462	5825
Data Rate (Mbps)	6	6
Mode	802.11g	802.11a

**Table 2-8. Config-3 (ANT1 MIMO & ANT2 MIMO)**

### 2.3 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

This device supports two configurations: one is with screen open and one is with screen closed. Both configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 8 of 330	

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

**Deviation from measurement procedure.....None**

### 3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

<b>FCC ID:</b> A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 9 of 330	

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**

The EUT complies with the requirement of §15.203.

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 10 of 330

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ( $\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 11 of 330	

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	10/31/2018	Annual	10/31/2019	WL25-1
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	4/24/2019	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	5/25/2018	Annual	5/25/2019	MY52350166
Anritsu	MA2411B	Pulse Power Sensor	10/30/2018	Annual	10/30/2019	846215
Anritsu	ML2495A	Power Meter	10/21/2018	Annual	10/21/2019	941001
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
COM-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Emco	3115	Horn Antenna (1-18GHz)	3/28/2018	Biennial	3/28/2020	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	6/7/2018	Triennial	6/7/2021	9203-2178
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	Line Impedance Stabilization Network	6/18/2018	Biennial	6/18/2020	114451
Huber + Suhner	Sucoflex 102A	40GHz Radiated Cable Set	8/23/2018	Annual	8/23/2019	251425001
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	8/23/2018	Annual	8/23/2019	NMLC-2
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/25/2018	Annual	6/25/2019	102133
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100040
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	9/19/2018	Annual	9/19/2019	100037
Seekonk	NC-100	Torque Wrench	5/4/2018	Annual	5/4/2020	022216
Sunol	DRH-118	Horn Antenna (1-18GHz)	8/11/2017	Biennial	8/11/2019	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107

**Table 6-1. Annual Test Equipment Calibration Schedule**

**Note:**

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 12 of 330	

## 7.0 TEST RESULTS

### 7.1 Summary

Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMF907N  
 FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7

**Table 7-1. Summary of Test Results**

**Notes:**

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.6.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 0.2.16.
- 6) Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.

FCC ID: A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 13 of 330	

- 7) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 8) Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

<b>FCC ID:</b> A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 14 of 330

## 7.2 26dB Bandwidth Measurement – 802.11ax OFDMA

RSS-Gen [6.2]

### Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer’s bandwidth measurement function is configured to measure the 26dB bandwidth.

*The 26dB bandwidth is used to determine the conducted power limits.*

### Test Procedure Used

ANSI C63.10-2013 – Section 12.4  
KDB 789033 D02 v02r01 – Section C

### Test Settings

1. The signal analyzers’ automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The “X” dB bandwidth parameter was set to X = 26. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

### Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 15 of 330	

### SISO Antenna-1 26 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	19.19
	5200	40	ax (20MHz)	26T	MCS0	19.15
	5240	48	ax (20MHz)	26T	MCS0	19.88
	5190	38	ax (40MHz)	26T	MCS0	22.47
	5230	46	ax (40MHz)	26T	MCS0	22.18
	5210	42	ax (80MHz)	26T	MCS0	20.35
Band 2A	5260	52	ax (20MHz)	26T	MCS0	18.84
	5280	56	ax (20MHz)	26T	MCS0	19.90
	5320	64	ax (20MHz)	26T	MCS0	19.82
	5270	54	ax (40MHz)	26T	MCS0	19.47
	5310	62	ax (40MHz)	26T	MCS0	19.34
	5290	58	ax (80MHz)	26T	MCS0	21.12
Band 2C	5500	100	ax (20MHz)	26T	MCS0	20.43
	5600	120	ax (20MHz)	26T	MCS0	20.67
	5720	144	ax (20MHz)	26T	MCS0	20.55
	5510	102	ax (40MHz)	26T	MCS0	19.16
	5590	118	ax (40MHz)	26T	MCS0	18.86
	5710	142	ax (40MHz)	26T	MCS0	19.21
	5530	106	ax (80MHz)	26T	MCS0	19.22
	5610	122	ax (80MHz)	26T	MCS0	19.35
	5690	138	ax (80MHz)	26T	MCS0	19.12

**Table 7-2. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)**

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 16 of 330

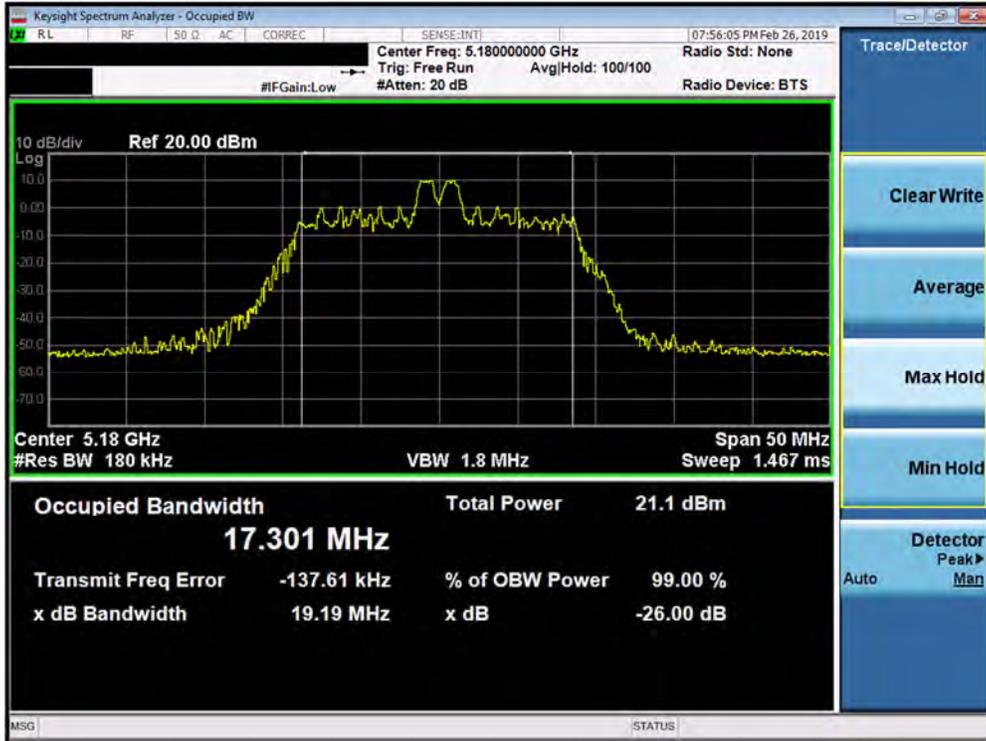


Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

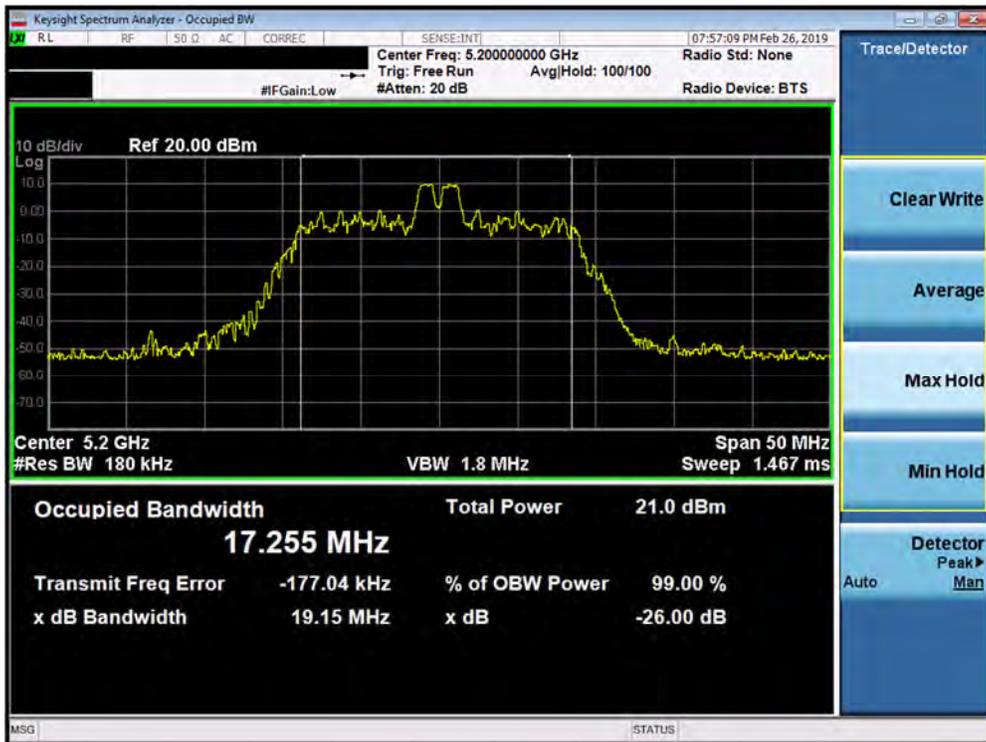

Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 17 of 330

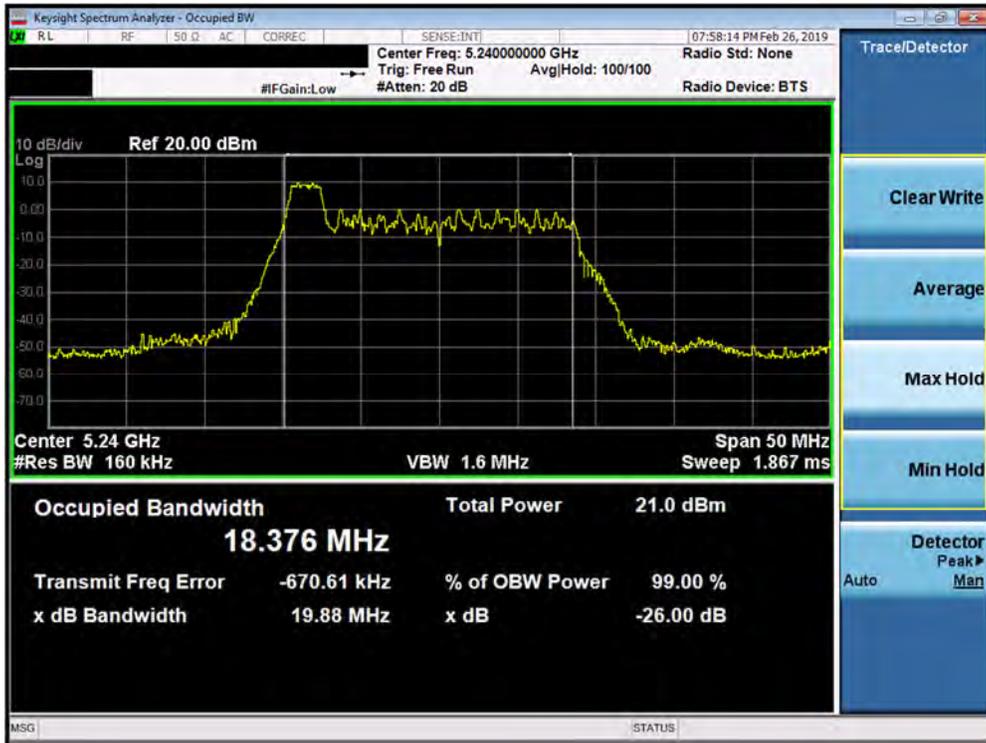

Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)




Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 18 of 330




Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

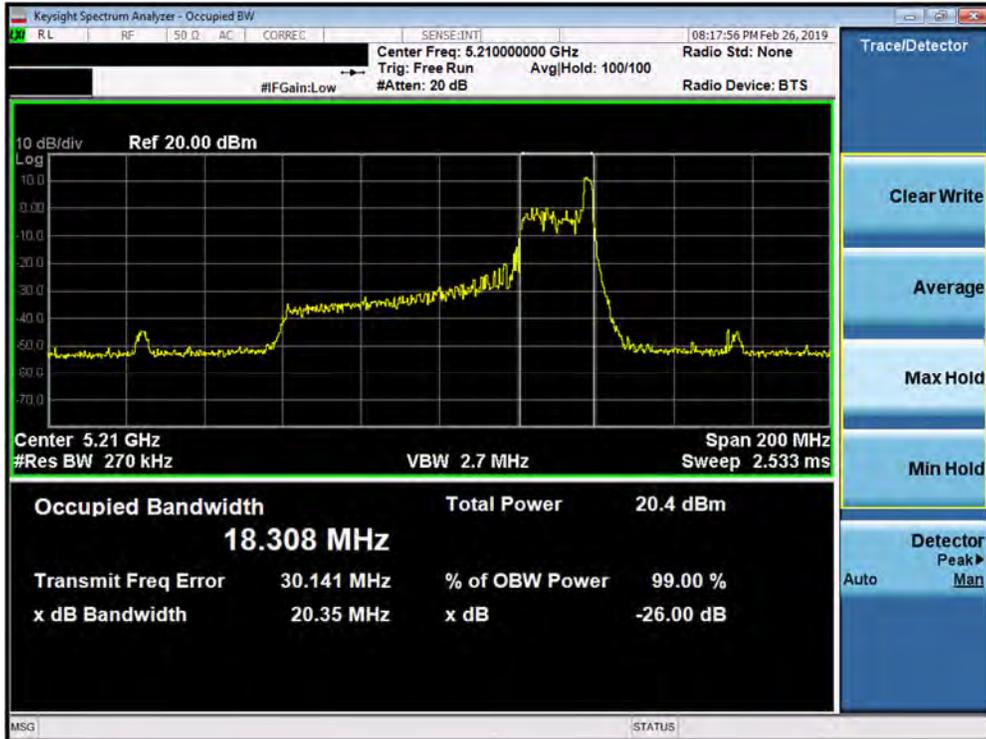


Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 19 of 330

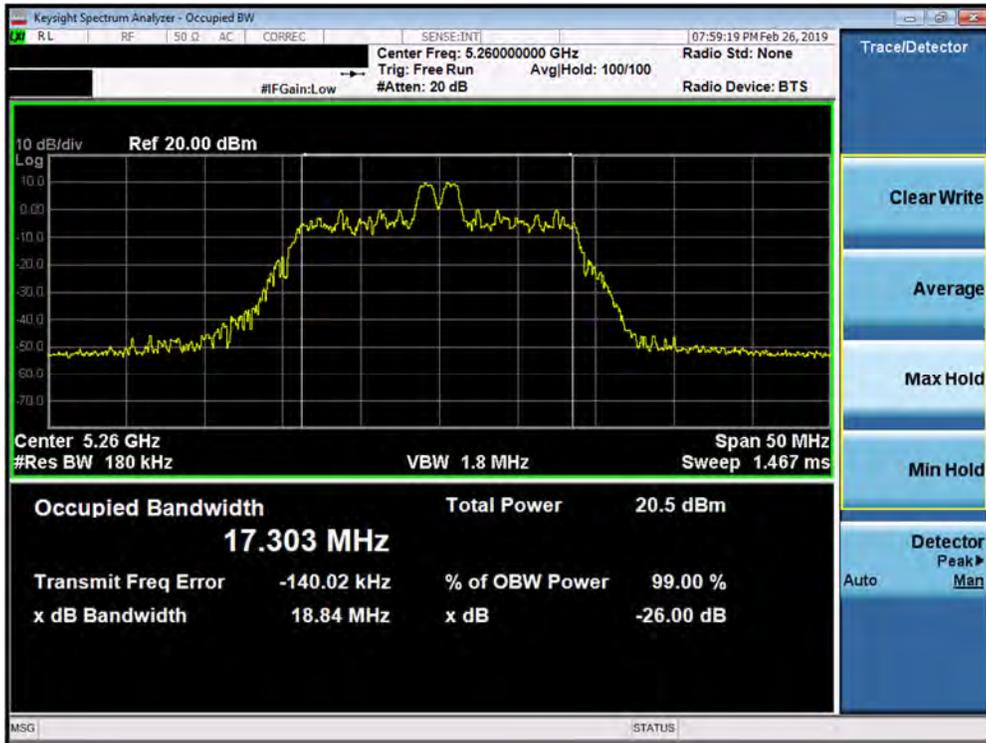


Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

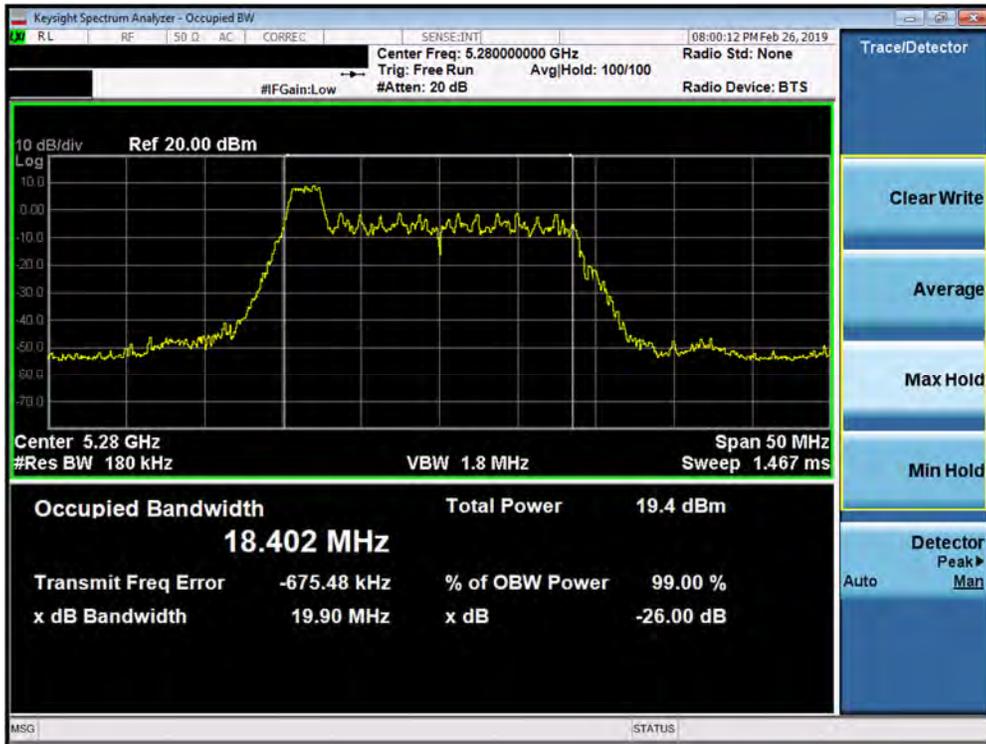


Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 20 of 330	

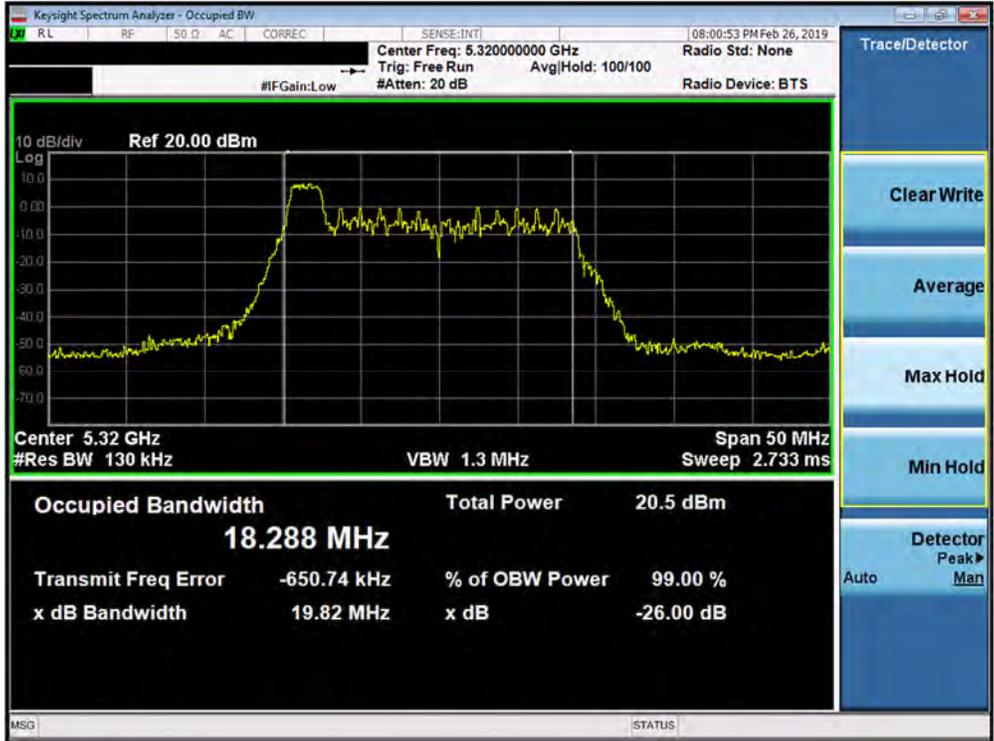


Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

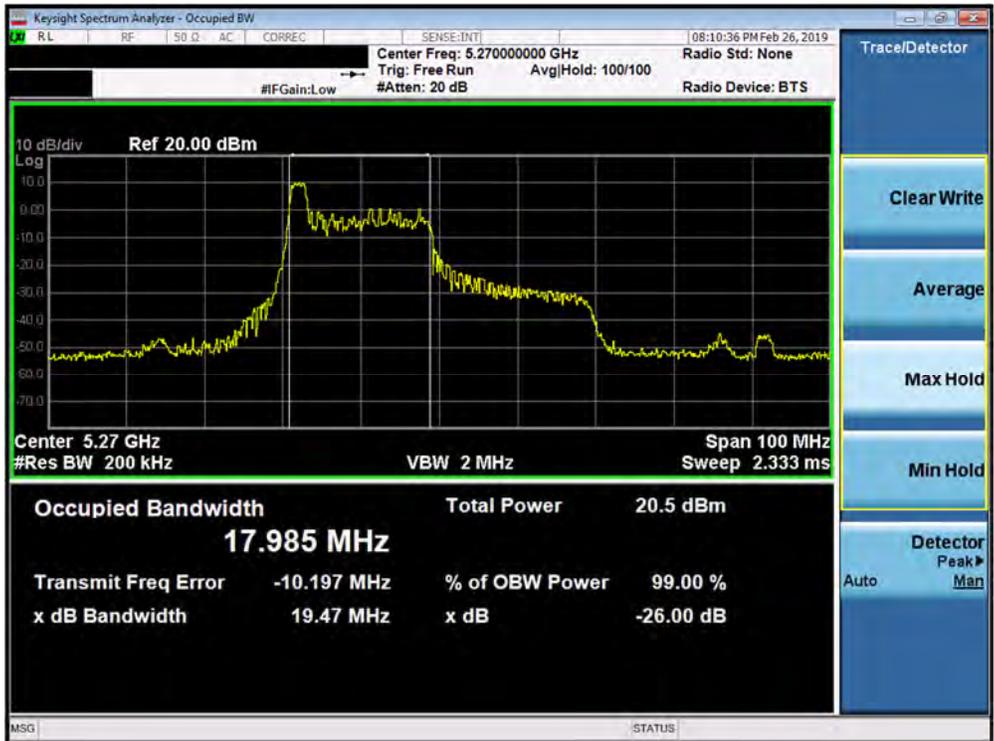


Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF907N	PCTEST ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 21 of 330

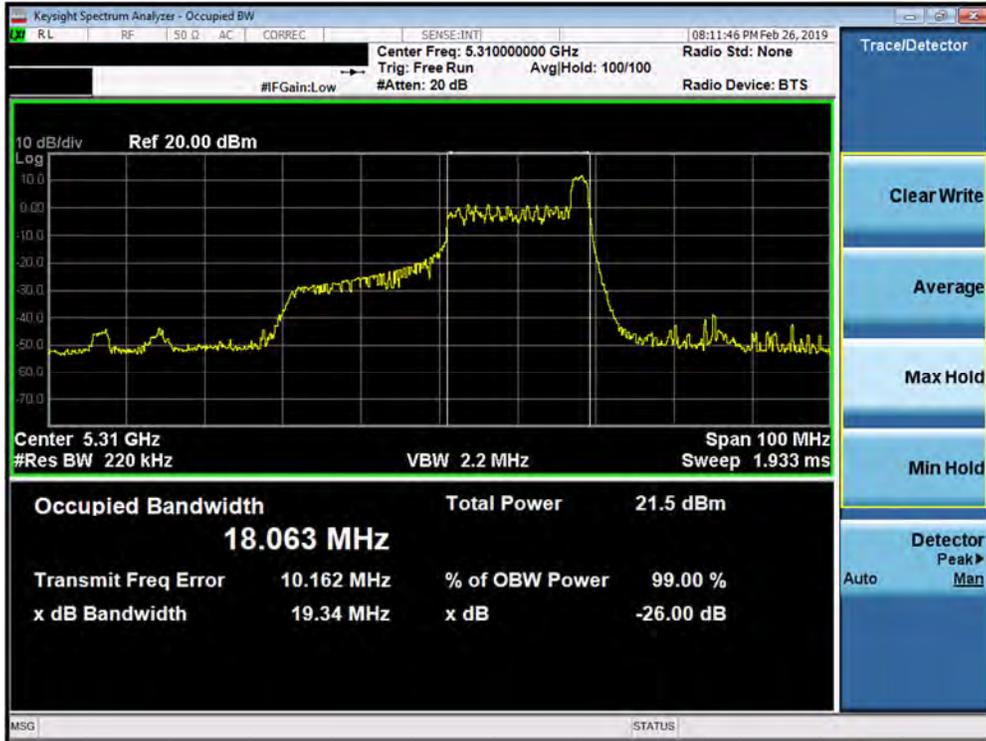


Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

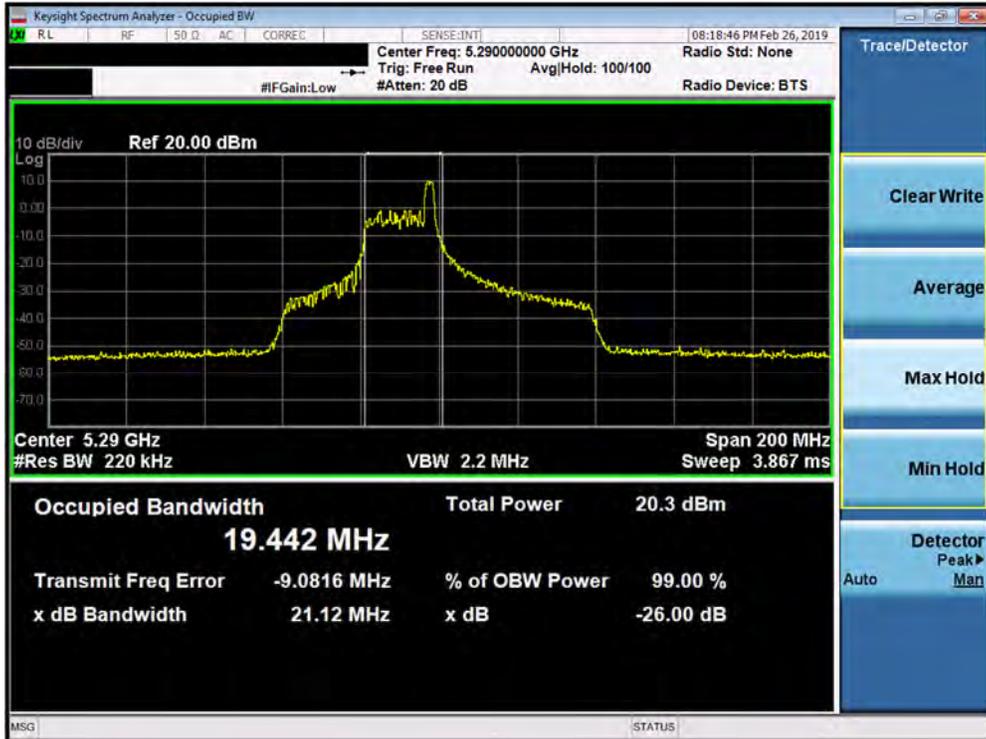


Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 22 of 330

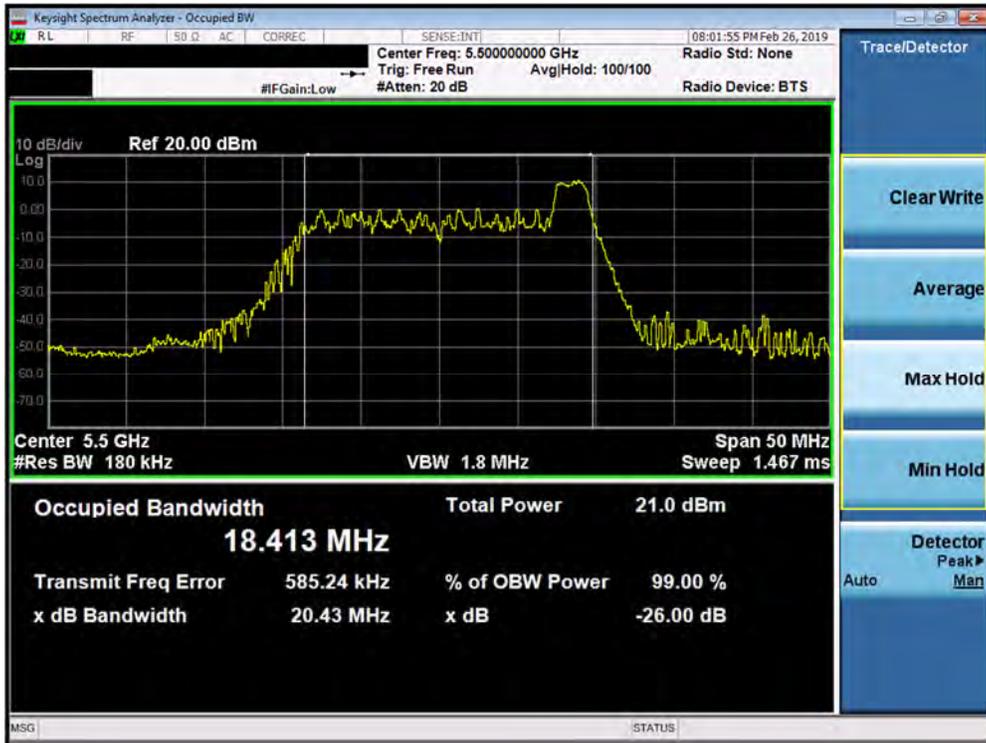


Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

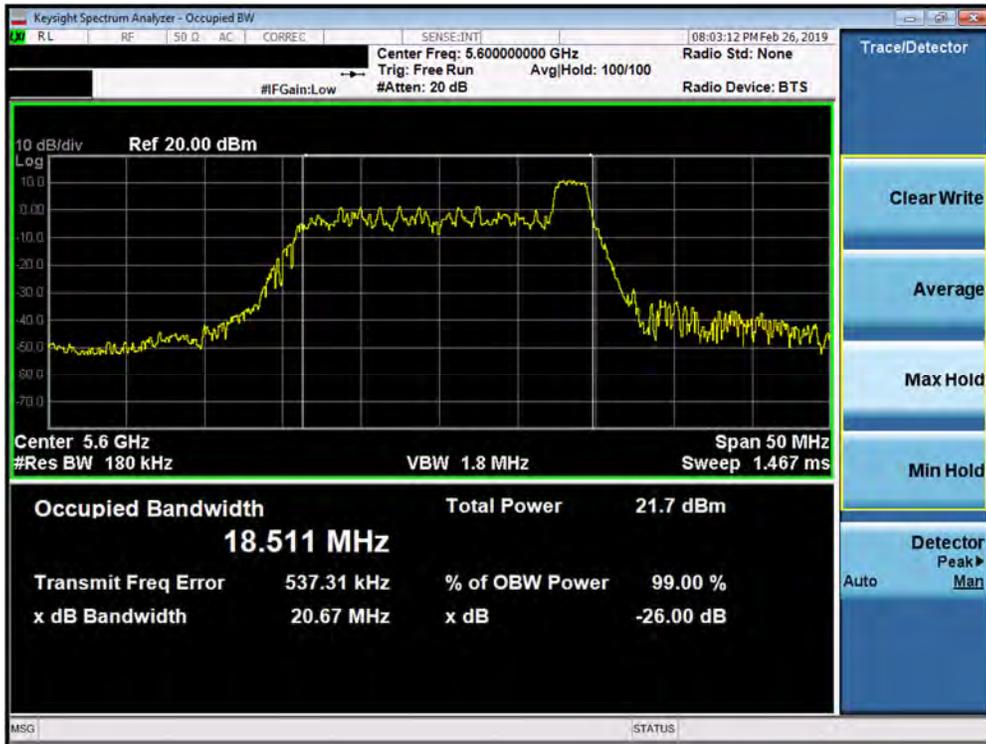


Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 23 of 330

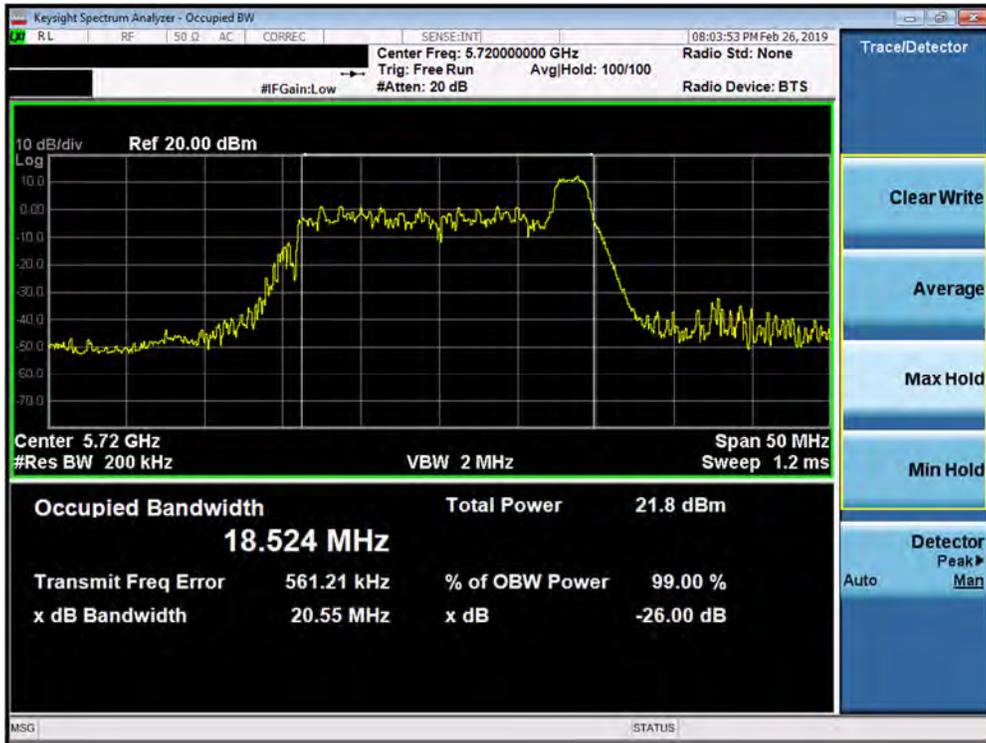

Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

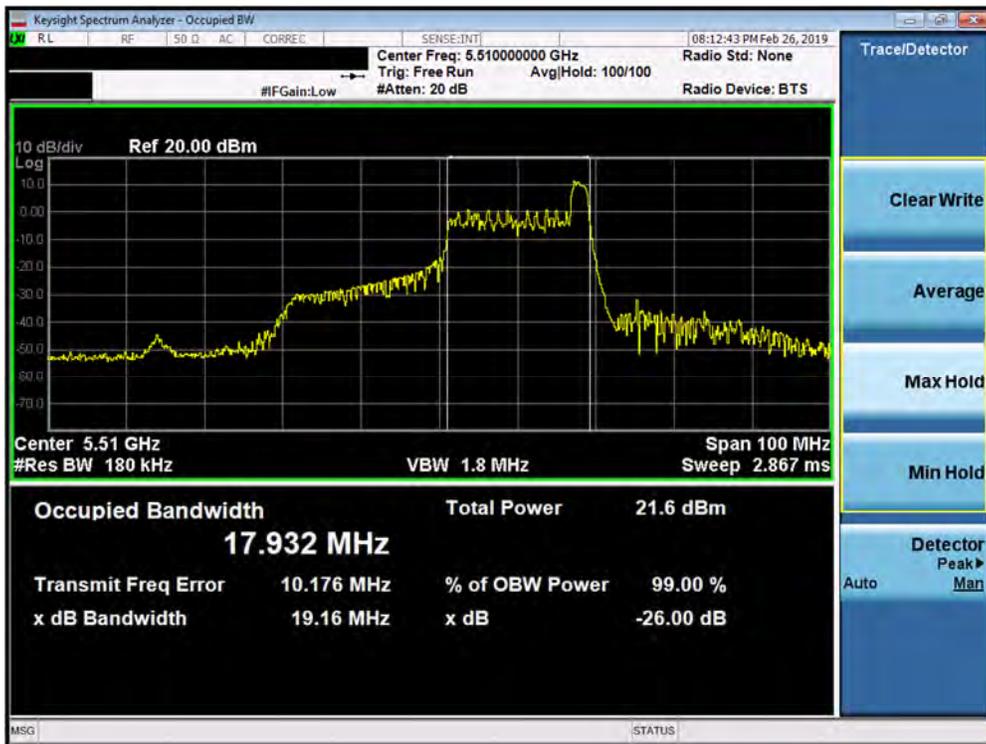

Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 24 of 330



Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)



Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 25 of 330



Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)



Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 26 of 330




### SISO Antenna-1 26 dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	23.36
	5200	40	ax (20MHz)	242T	MCS0	21.31
	5240	48	ax (20MHz)	242T	MCS0	21.55
	5190	38	ax (40MHz)	484T	MCS0	40.11
	5230	46	ax (40MHz)	484T	MCS0	40.03
	5210	42	ax (80MHz)	996T	MCS0	80.67
Band 2A	5260	52	ax (20MHz)	242T	MCS0	26.03
	5280	56	ax (20MHz)	242T	MCS0	22.50
	5320	64	ax (20MHz)	242T	MCS0	21.81
	5270	54	ax (40MHz)	484T	MCS0	39.65
	5310	62	ax (40MHz)	484T	MCS0	40.28
	5290	58	ax (80MHz)	996T	MCS0	80.89
Band 2C	5500	100	ax (20MHz)	242T	MCS0	25.02
	5600	120	ax (20MHz)	242T	MCS0	36.20
	5720	144	ax (20MHz)	242T	MCS0	32.61
	5510	102	ax (40MHz)	484T	MCS0	39.87
	5590	118	ax (40MHz)	484T	MCS0	40.36
	5710	142	ax (40MHz)	484T	MCS0	39.99
	5530	106	ax (80MHz)	996T	MCS0	81.02
	5610	122	ax (80MHz)	996T	MCS0	80.95
	5690	138	ax (80MHz)	996T	MCS0	81.76

**Table 7-3. Conducted Bandwidth Measurements SISO ANT1 (Full Tones)**

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 28 of 330

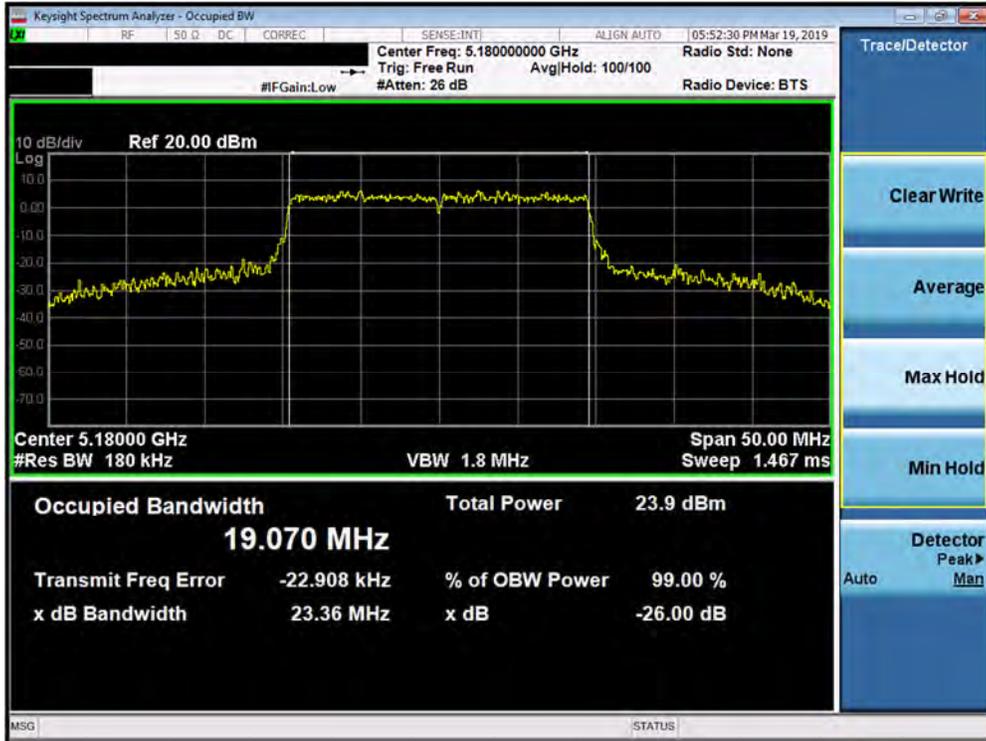


Plot 7-22. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

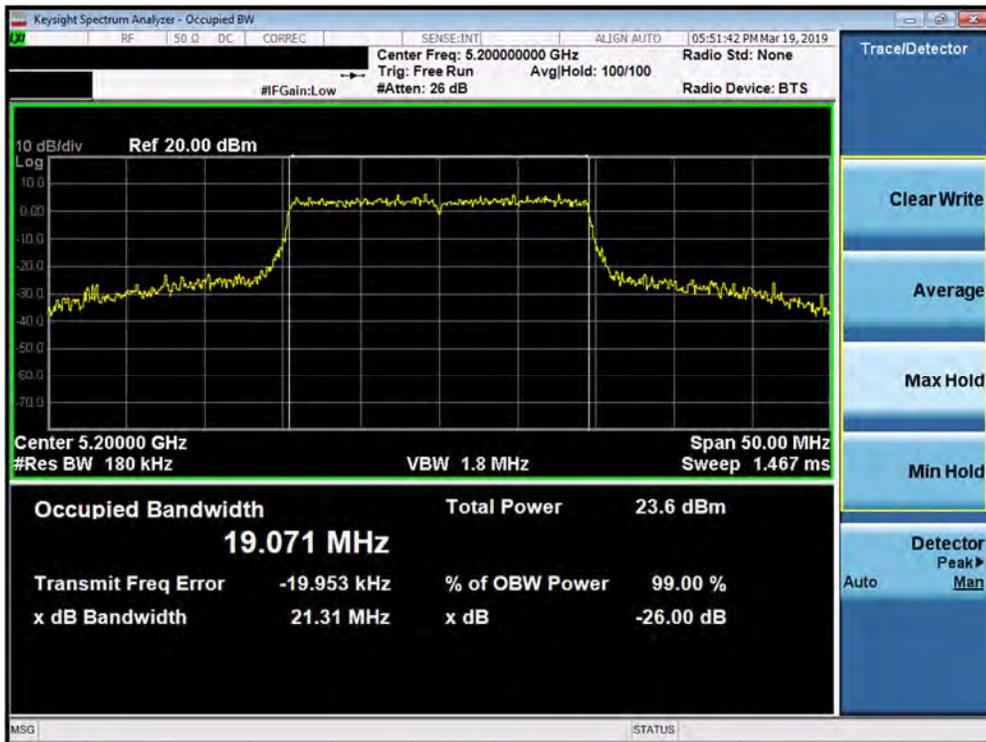


Plot 7-23. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 29 of 330

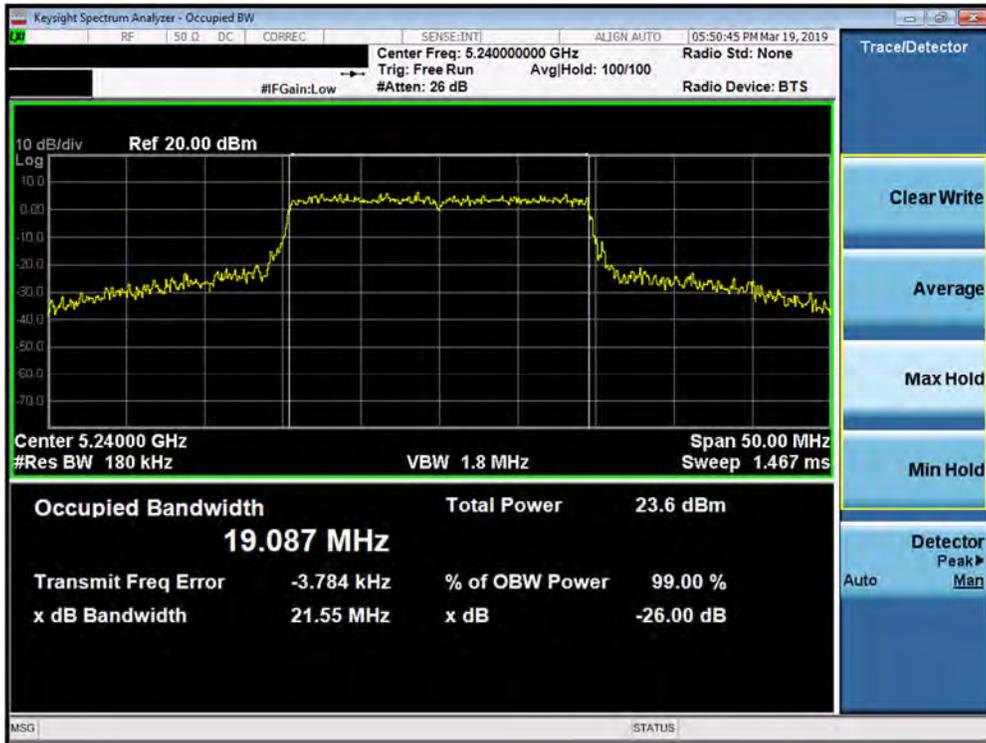

Plot 7-24. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

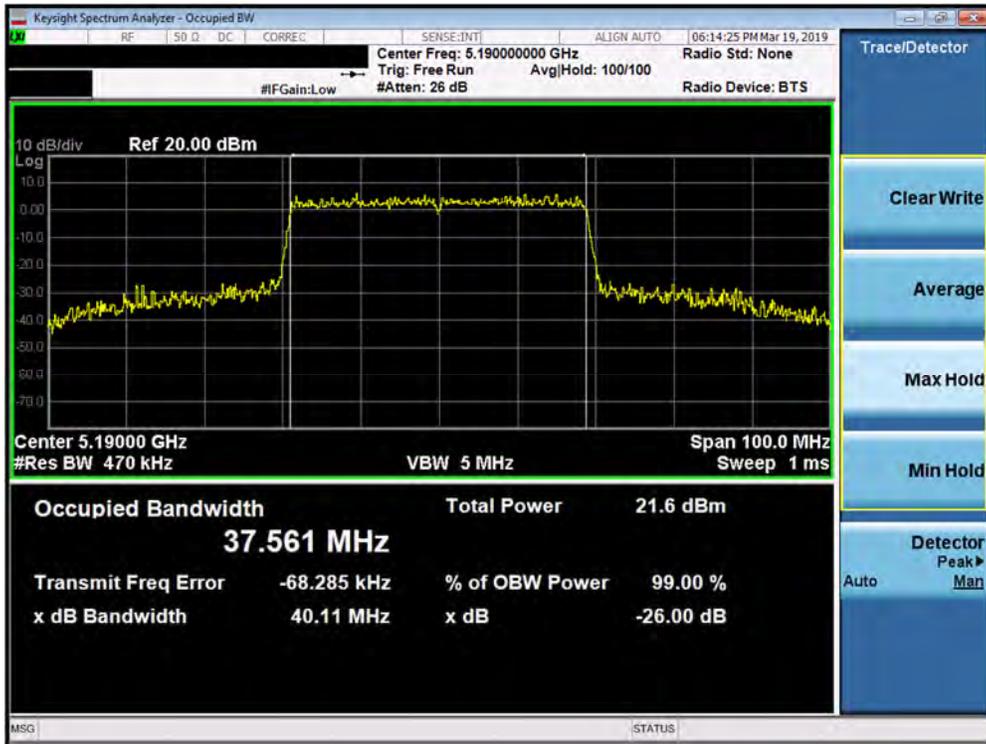


Plot 7-25. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 30 of 330




Plot 7-26. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

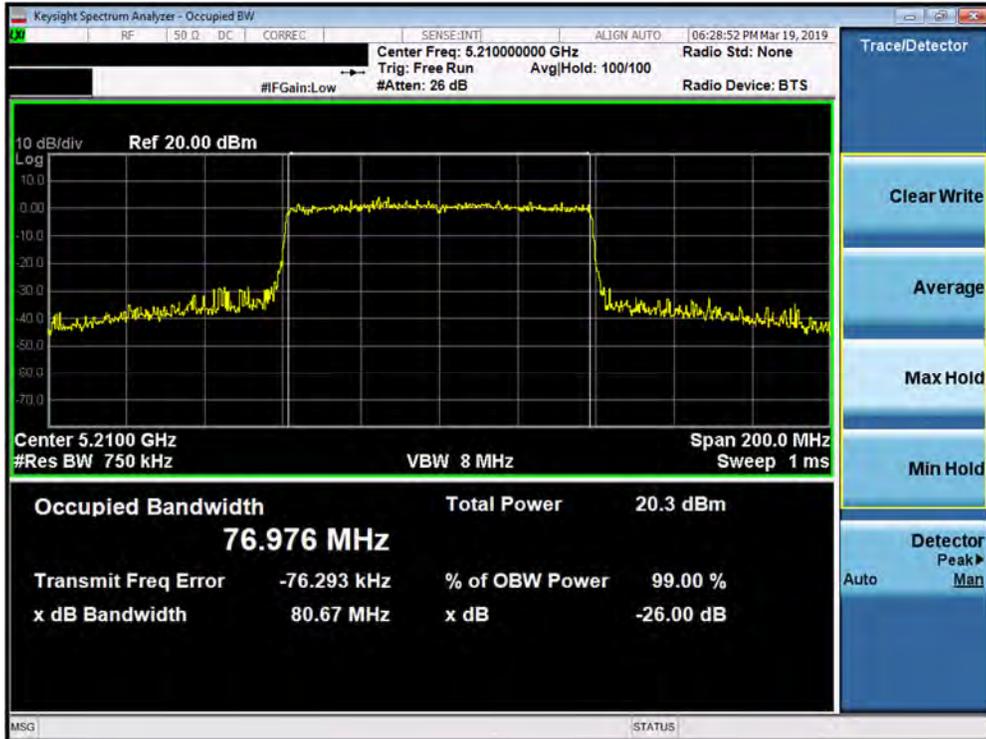


Plot 7-27. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 31 of 330

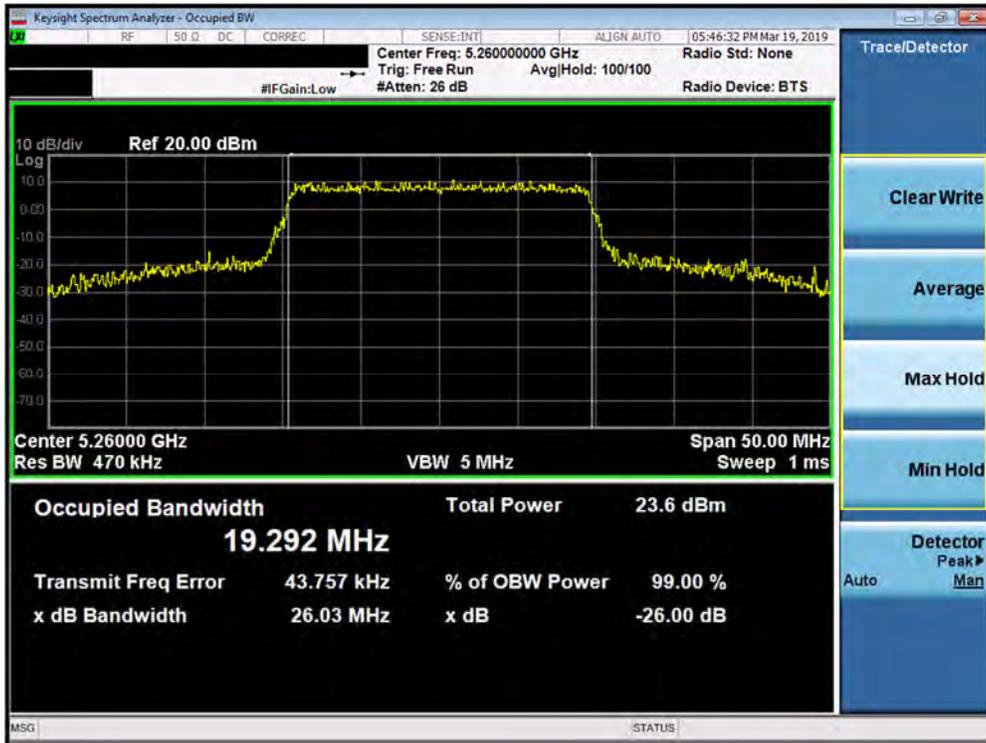


Plot 7-28. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

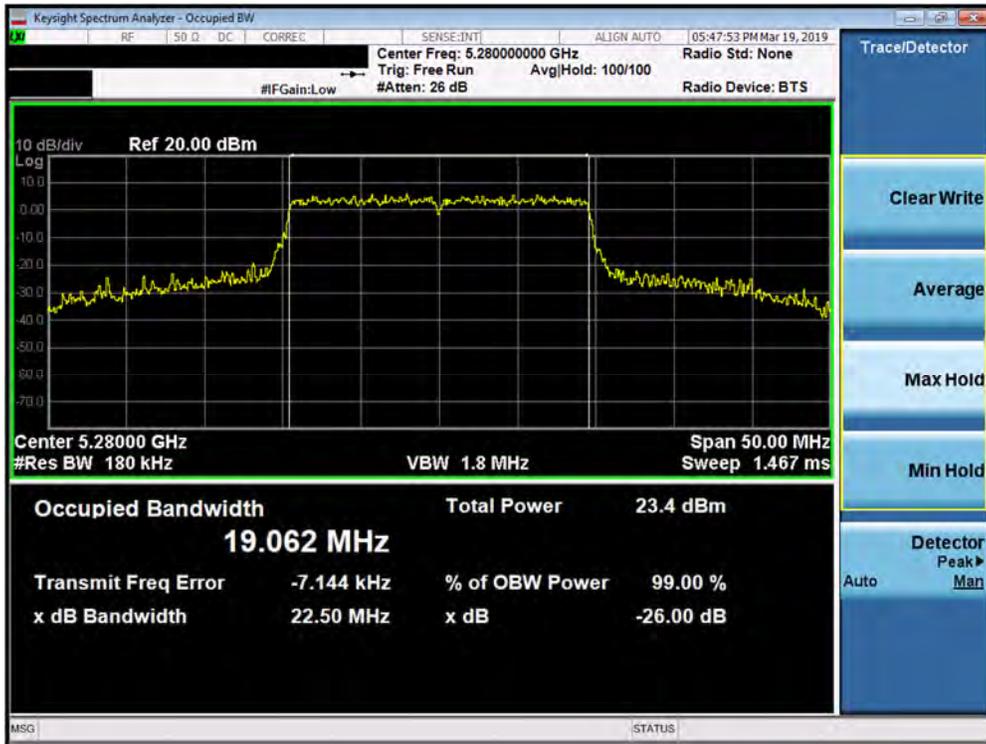

Plot 7-29. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF907N			<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset		Page 32 of 330	

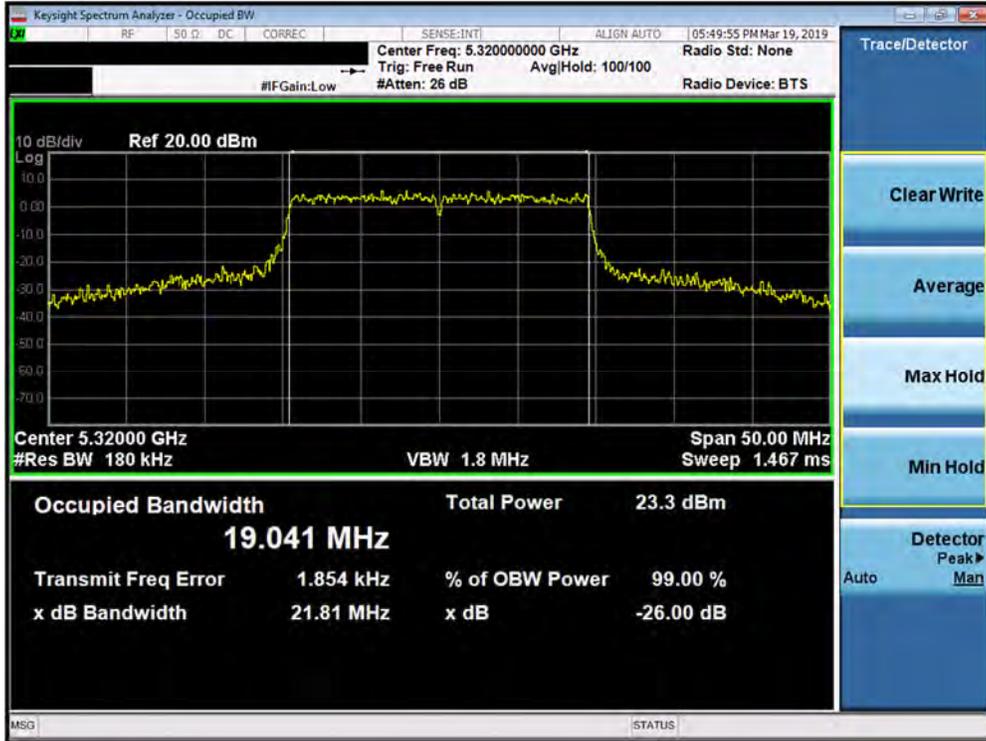


Plot 7-30. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)




Plot 7-31. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 33 of 330

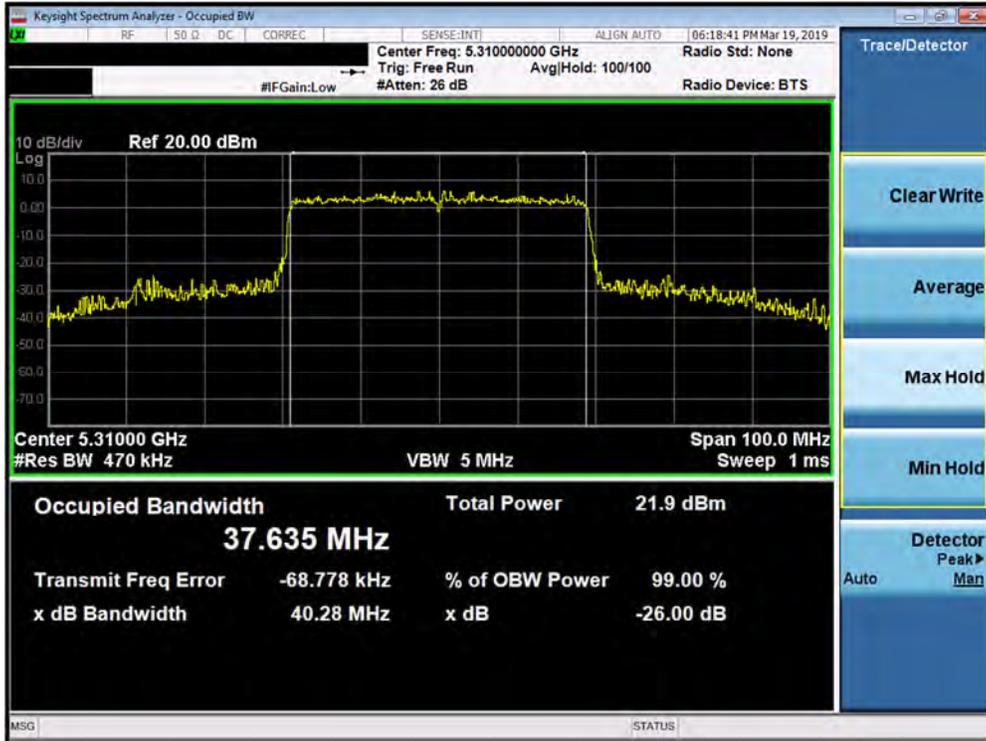


Plot 7-32. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

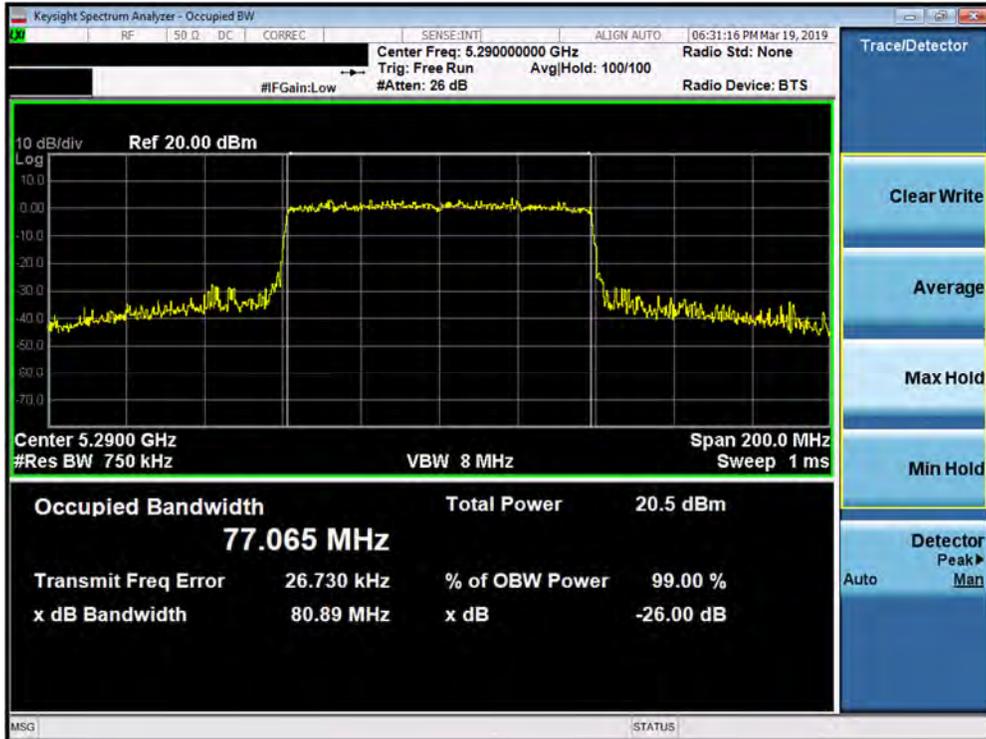


Plot 7-33. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 34 of 330	

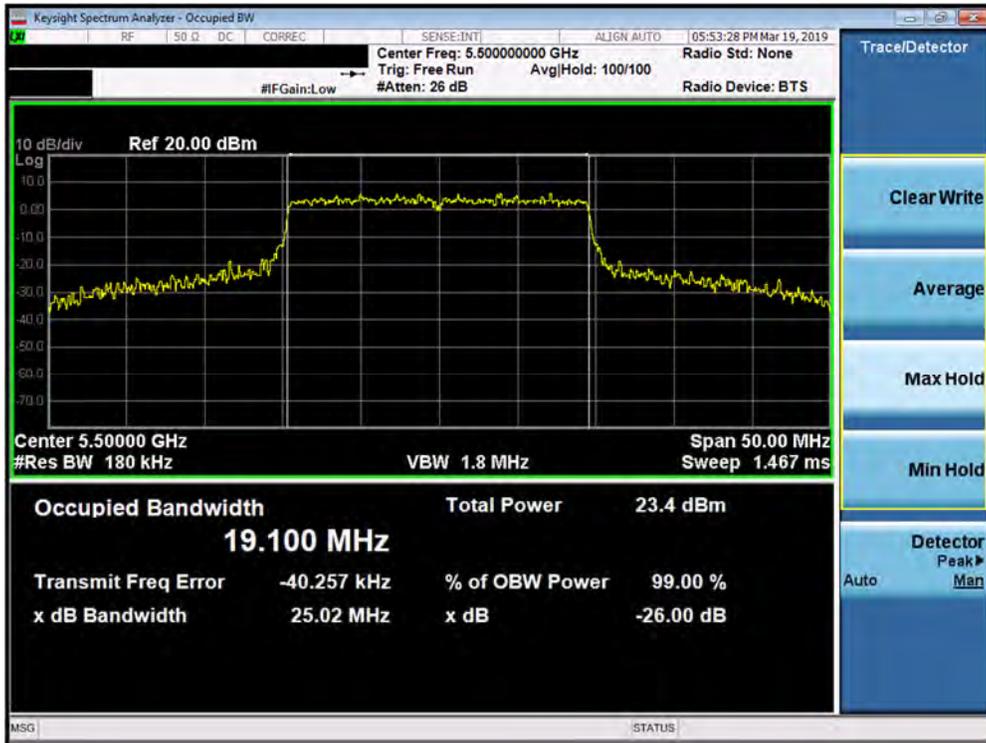


Plot 7-34. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

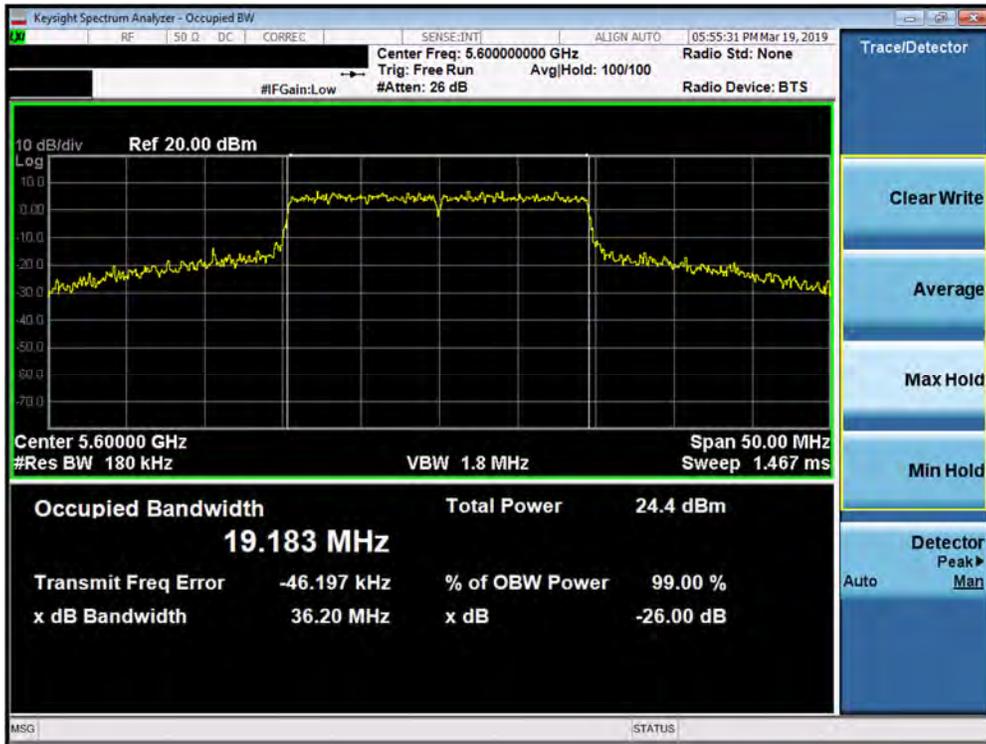


Plot 7-35. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT</b> (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 35 of 330

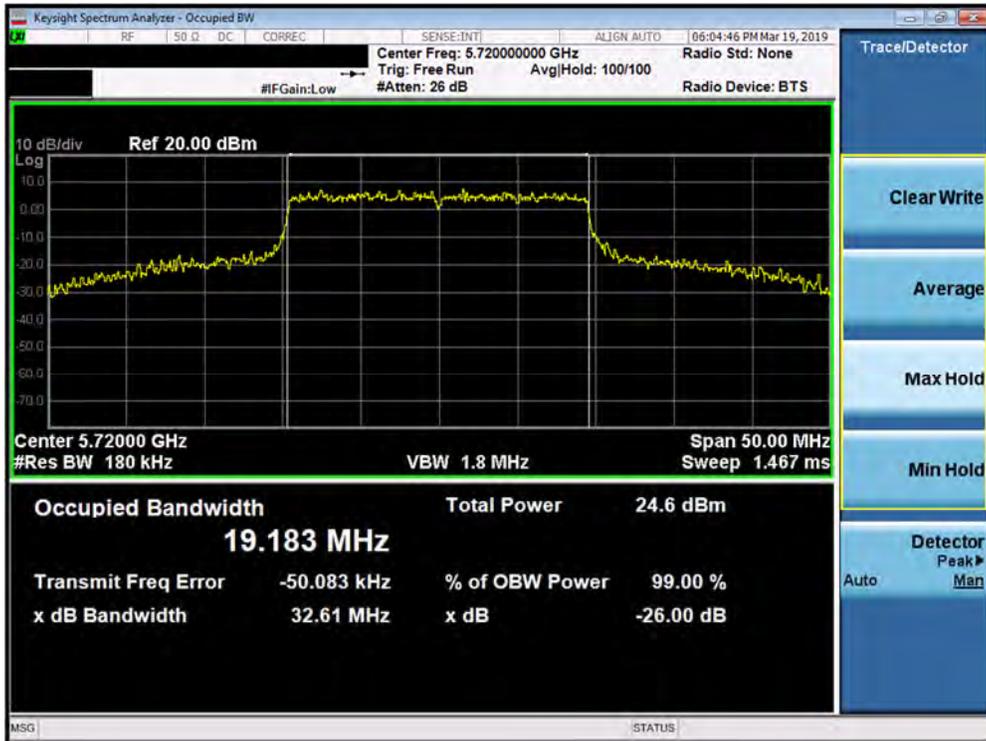


Plot 7-36. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

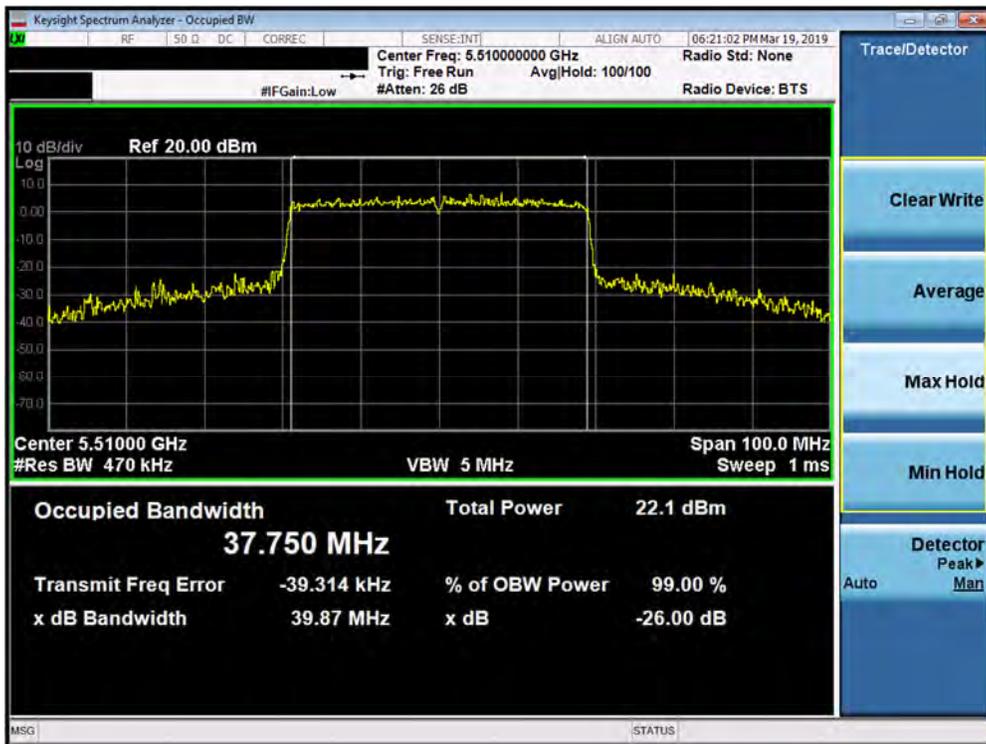

Plot 7-37. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 36 of 330



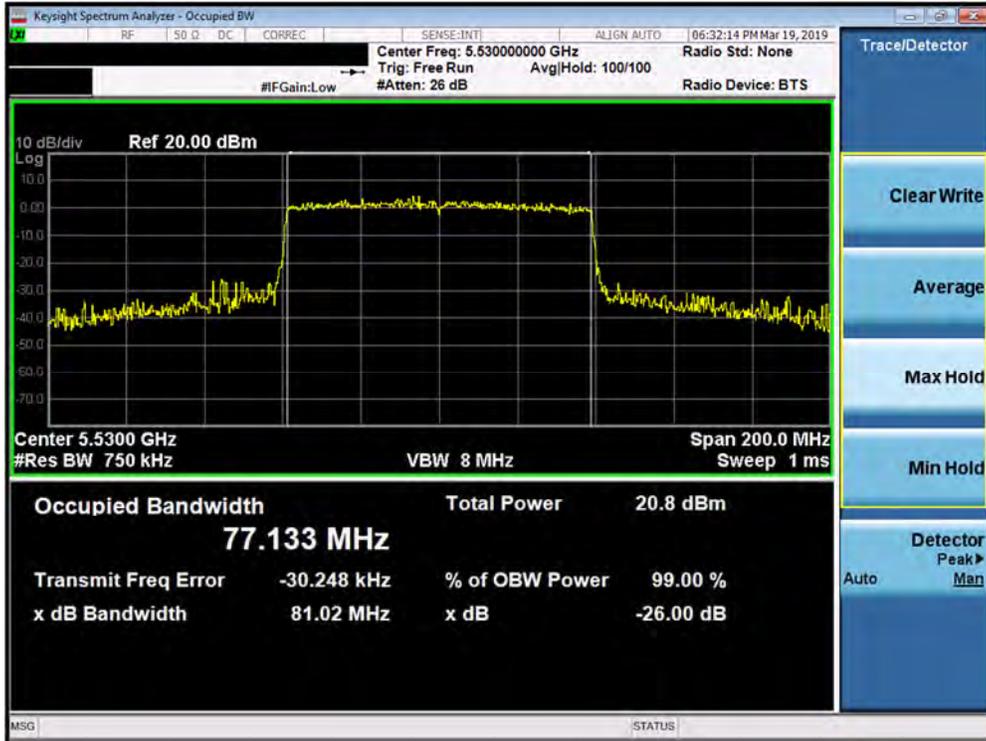

Plot 7-40. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)



Plot 7-41. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 38 of 330



Plot 7-42. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 39 of 330

### SISO Antenna-2 26dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.97
	5200	40	ax (20MHz)	26T	MCS0	18.97
	5240	48	ax (20MHz)	26T	MCS0	19.03
	5190	38	ax (40MHz)	26T	MCS0	19.32
	5230	46	ax (40MHz)	26T	MCS0	21.38
	5210	42	ax (80MHz)	26T	MCS0	19.52
Band 2A	5260	52	ax (20MHz)	26T	MCS0	19.85
	5280	56	ax (20MHz)	26T	MCS0	19.76
	5320	64	ax (20MHz)	26T	MCS0	18.75
	5270	54	ax (40MHz)	26T	MCS0	20.13
	5310	62	ax (40MHz)	26T	MCS0	20.13
	5290	58	ax (80MHz)	26T	MCS0	22.20
Band 2C	5500	100	ax (20MHz)	26T	MCS0	19.04
	5600	120	ax (20MHz)	26T	MCS0	18.69
	5720	144	ax (20MHz)	26T	MCS0	19.80
	5510	102	ax (40MHz)	26T	MCS0	19.40
	5590	118	ax (40MHz)	26T	MCS0	19.14
	5710	142	ax (40MHz)	26T	MCS0	22.95
	5530	106	ax (80MHz)	26T	MCS0	20.51
	5610	122	ax (80MHz)	26T	MCS0	18.69
	5690	138	ax (80MHz)	26T	MCS0	21.97

**Table 7-4. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)**

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 40 of 330

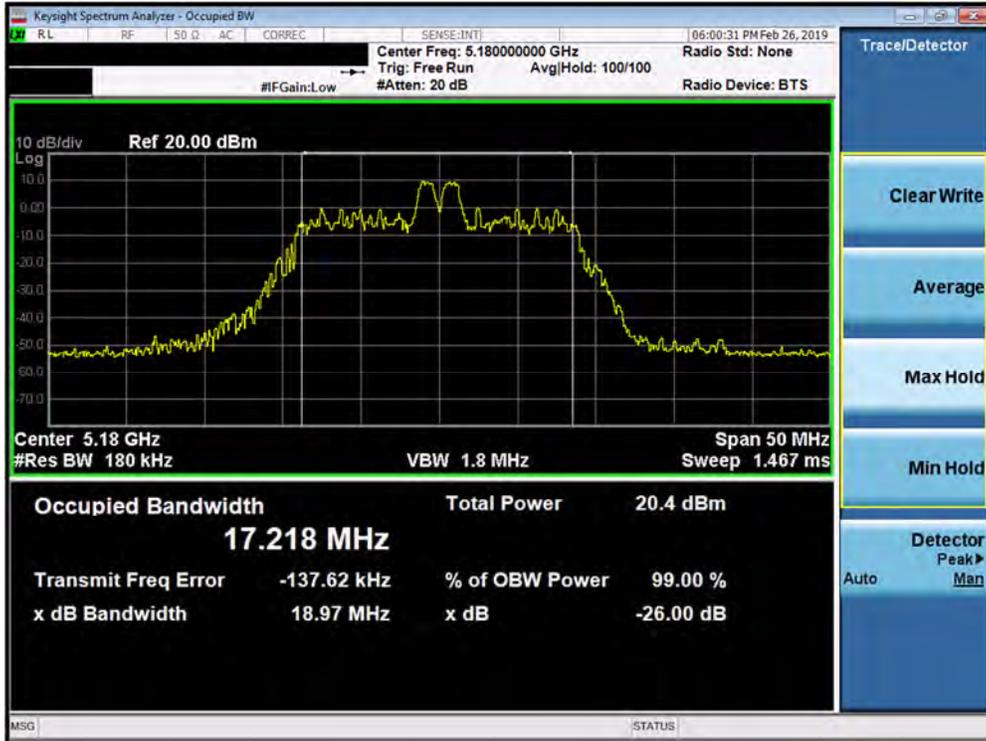


Plot 7-43. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

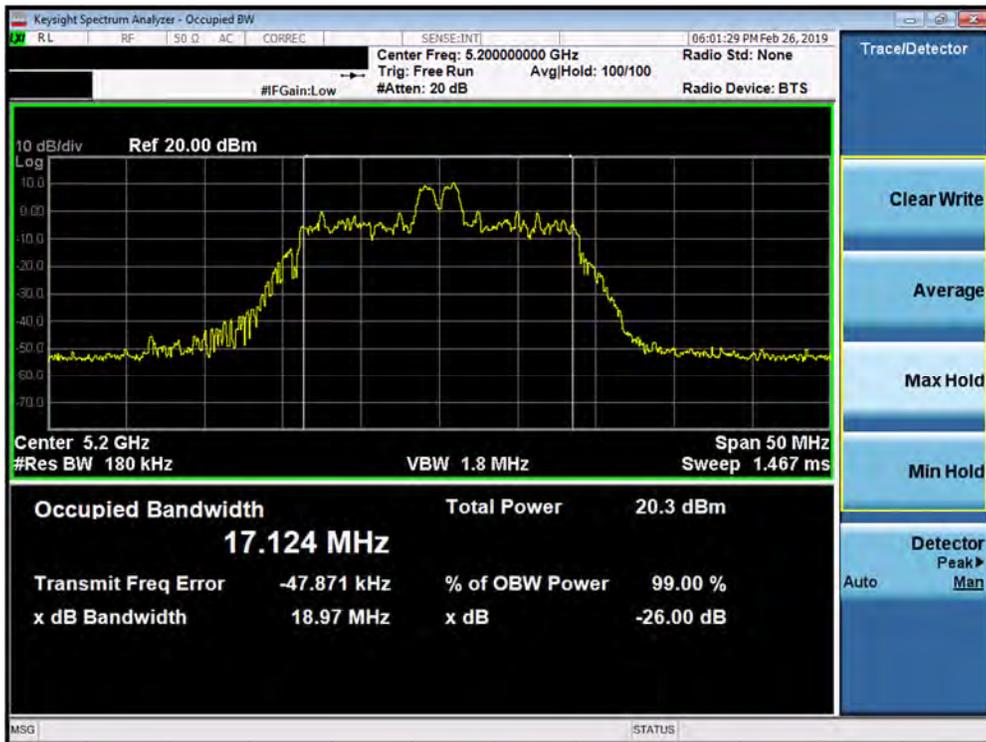


Plot 7-44. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 41 of 330

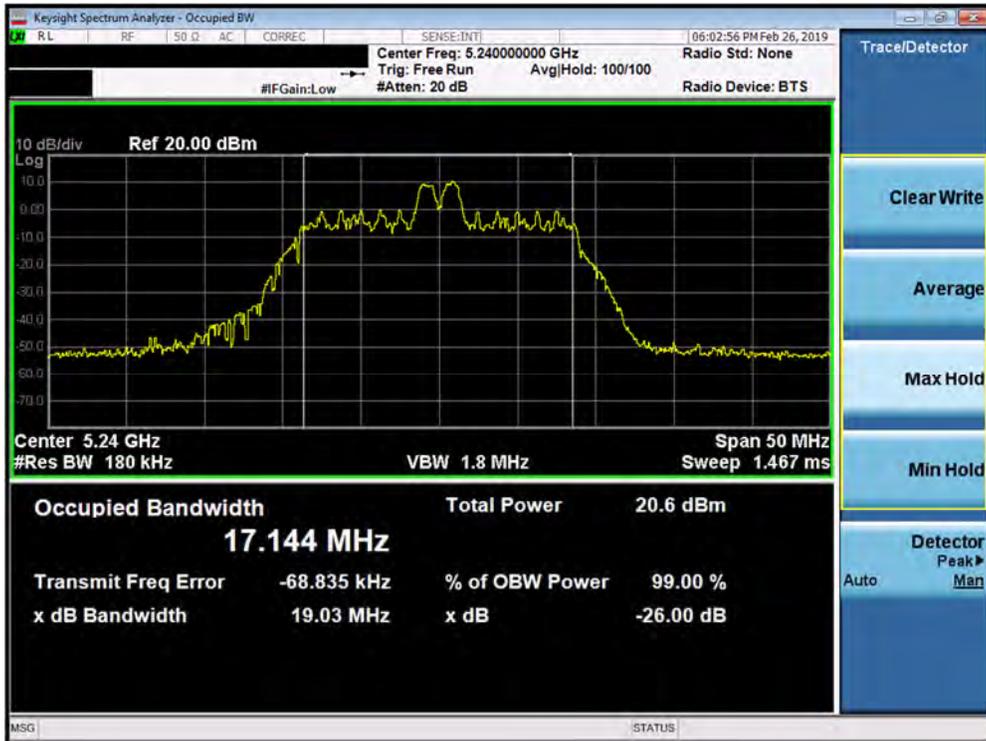

Plot 7-45. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

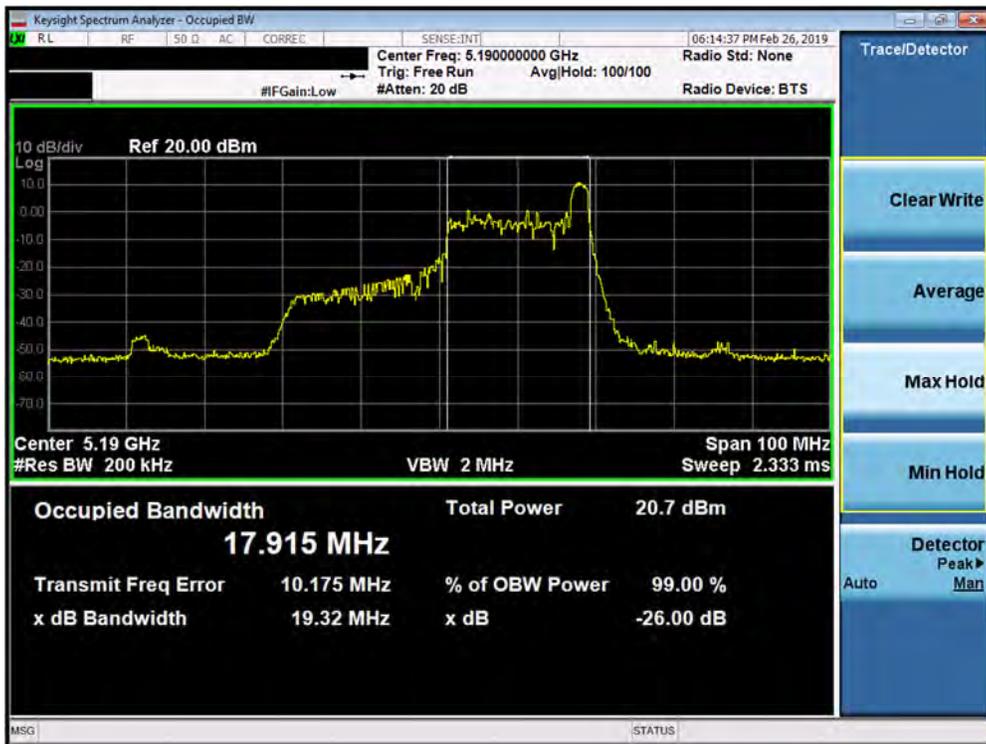


Plot 7-46. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 42 of 330




Plot 7-47. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

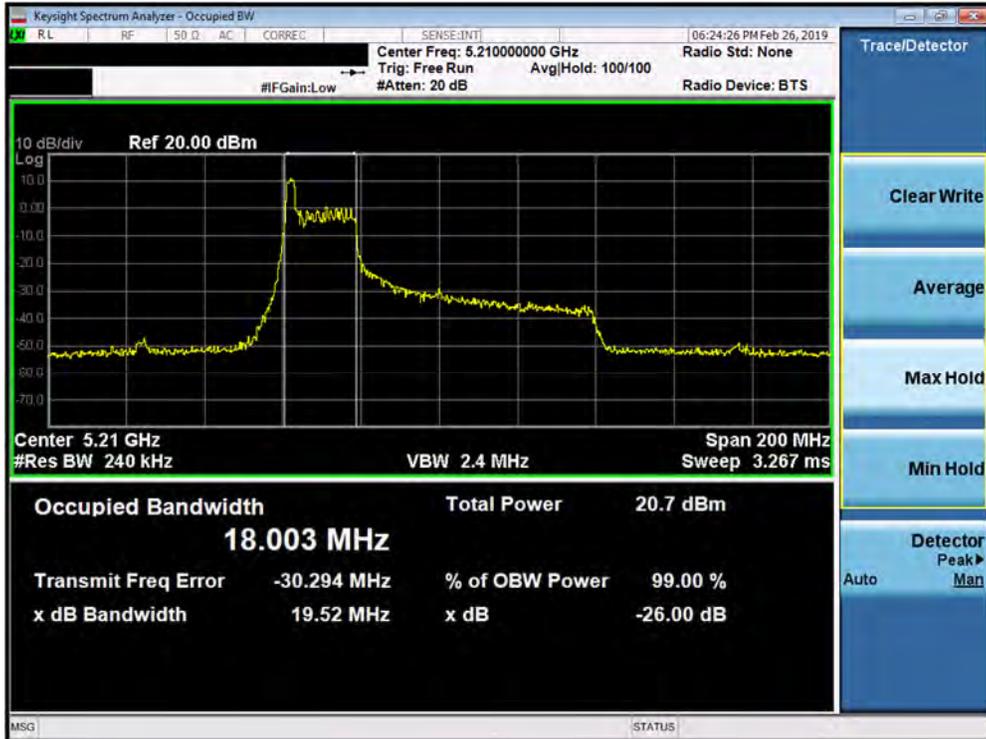


Plot 7-48. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 43 of 330

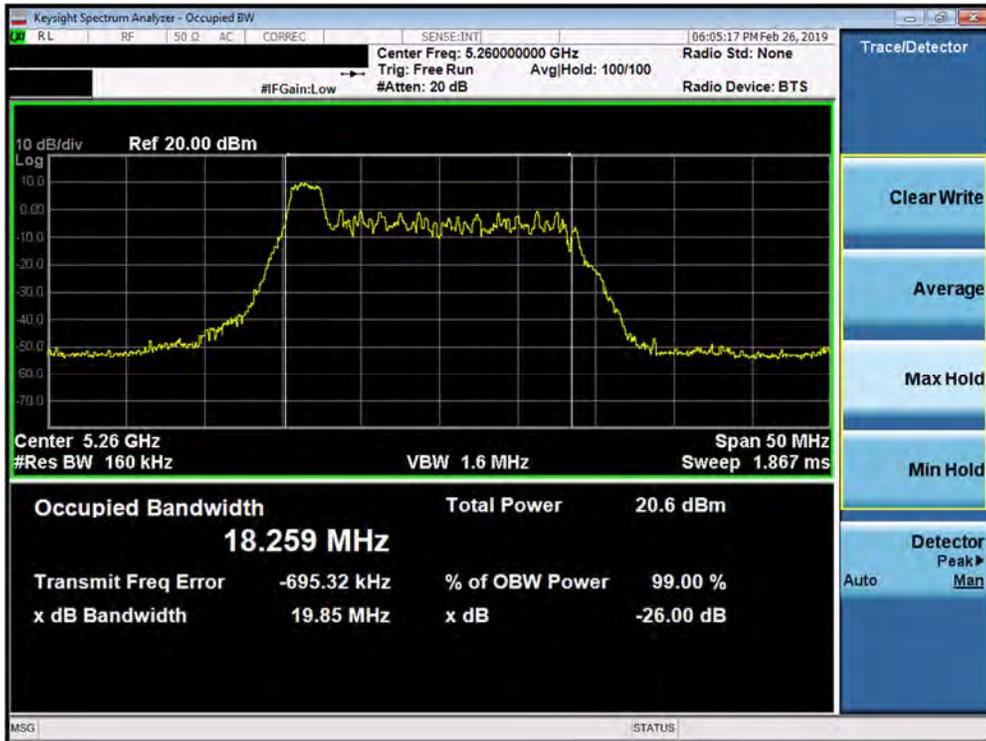


Plot 7-49. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

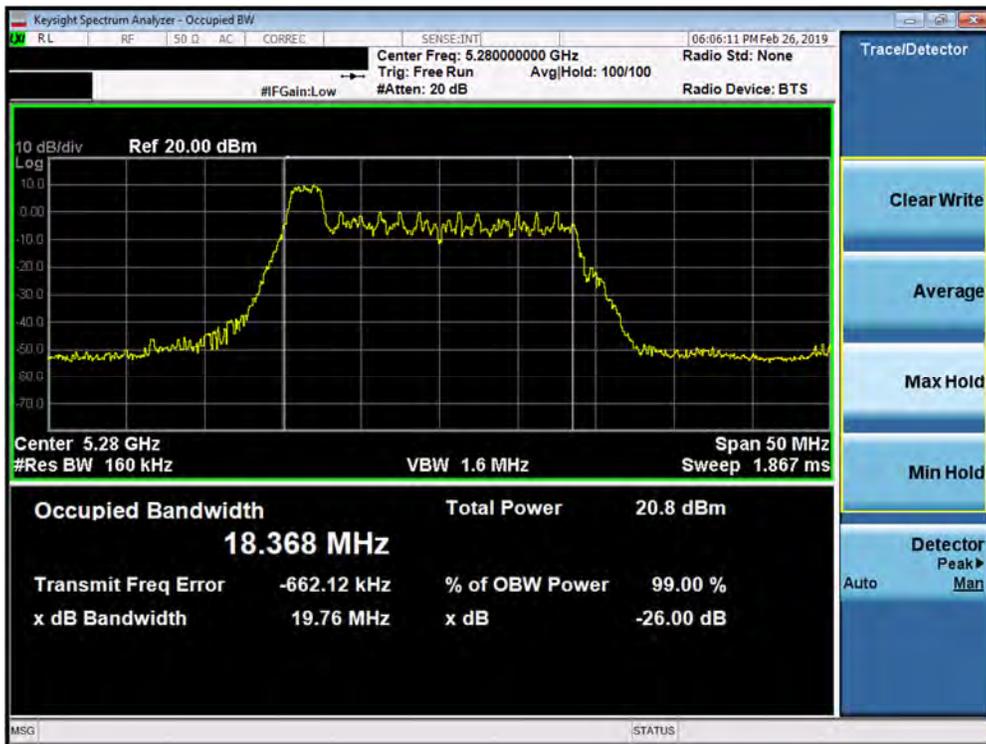


Plot 7-50. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 44 of 330

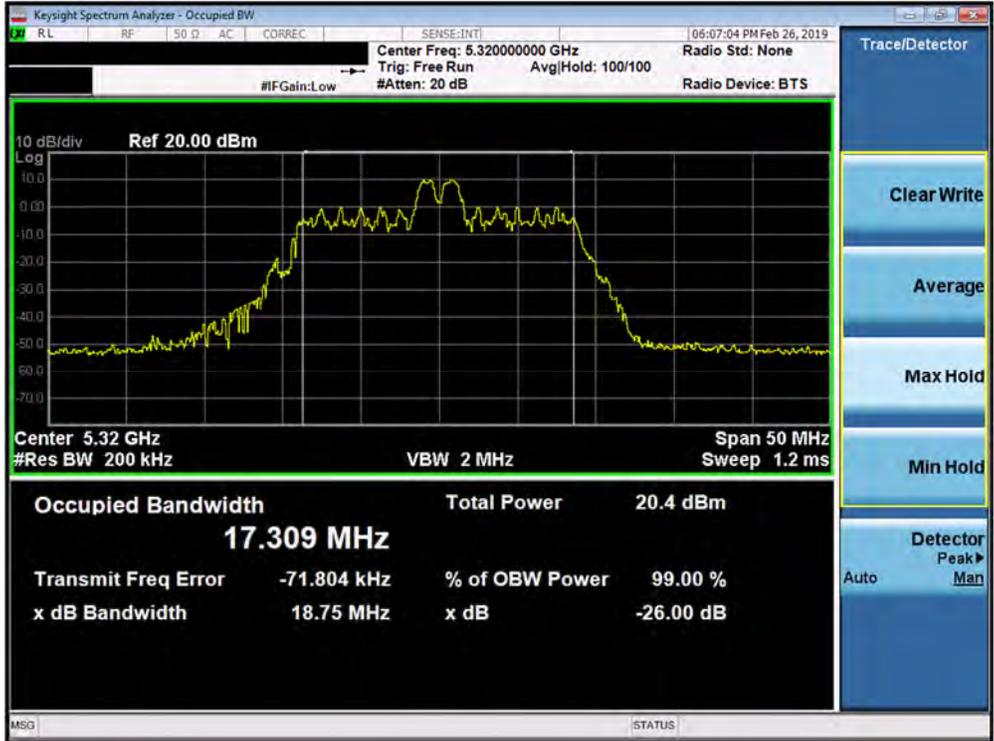


Plot 7-51. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

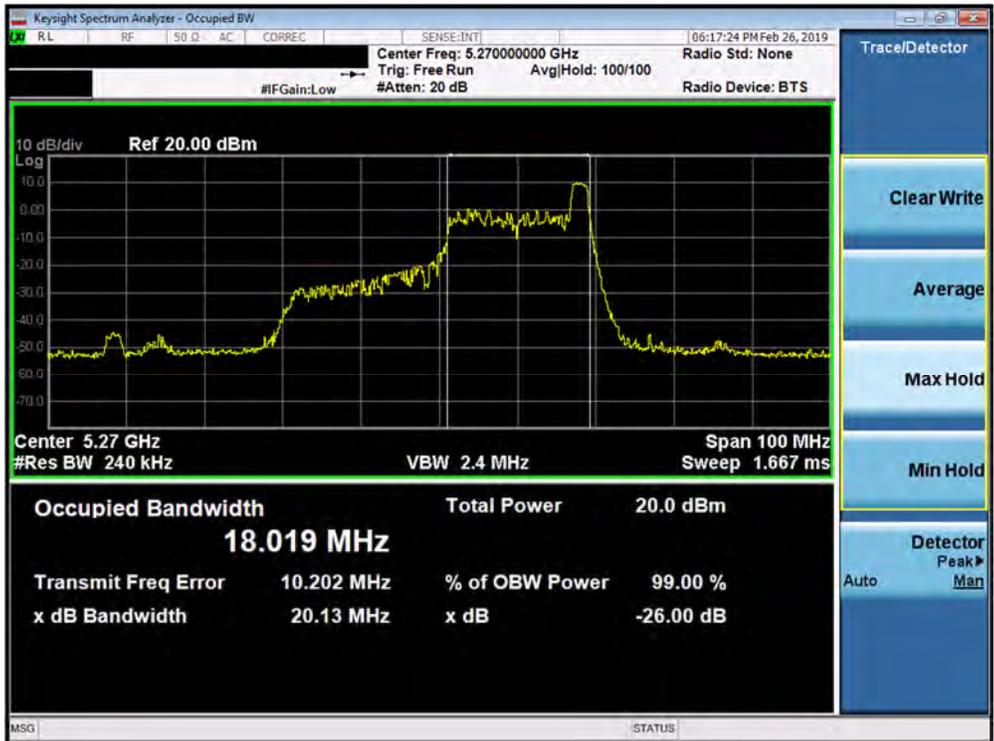


Plot 7-52. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 45 of 330

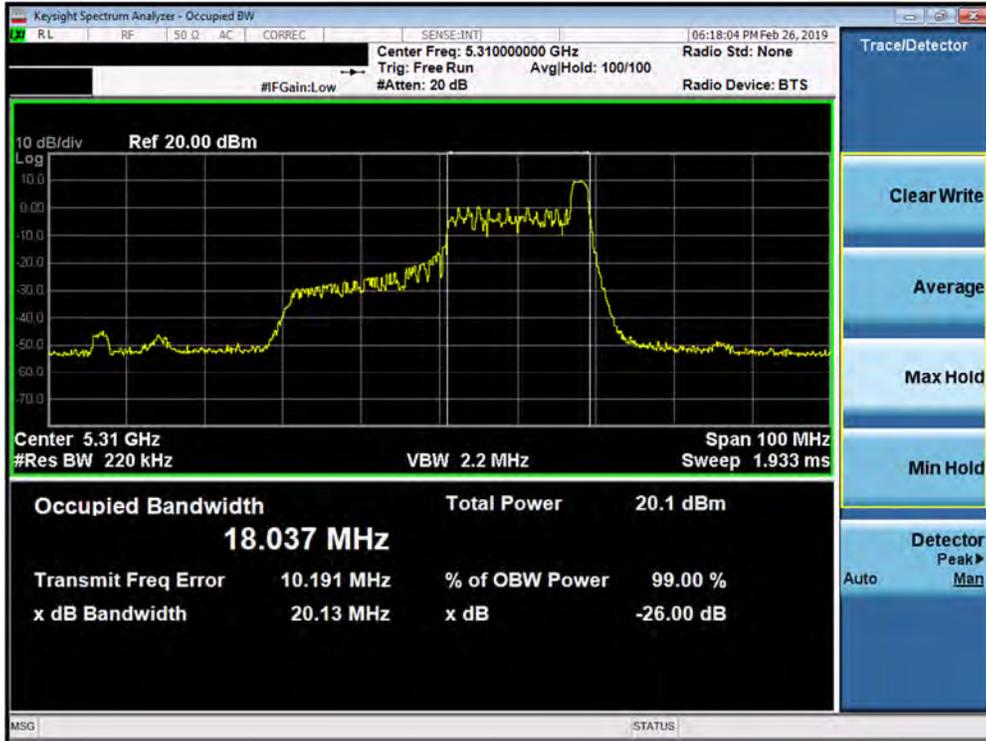


Plot 7-53. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

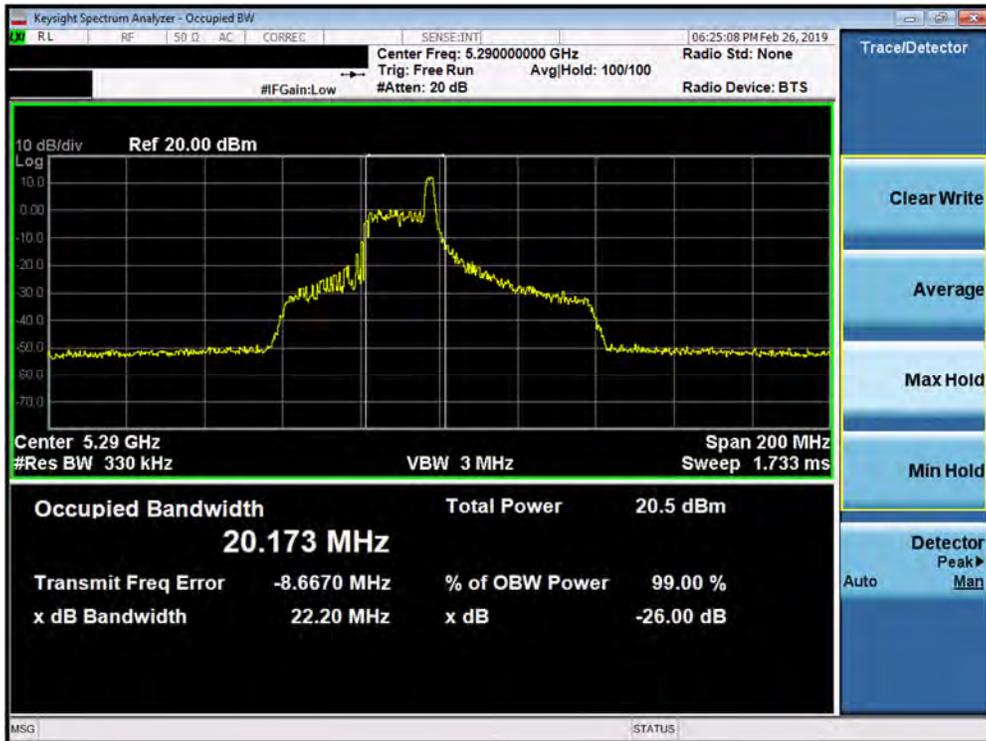


Plot 7-54. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 46 of 330

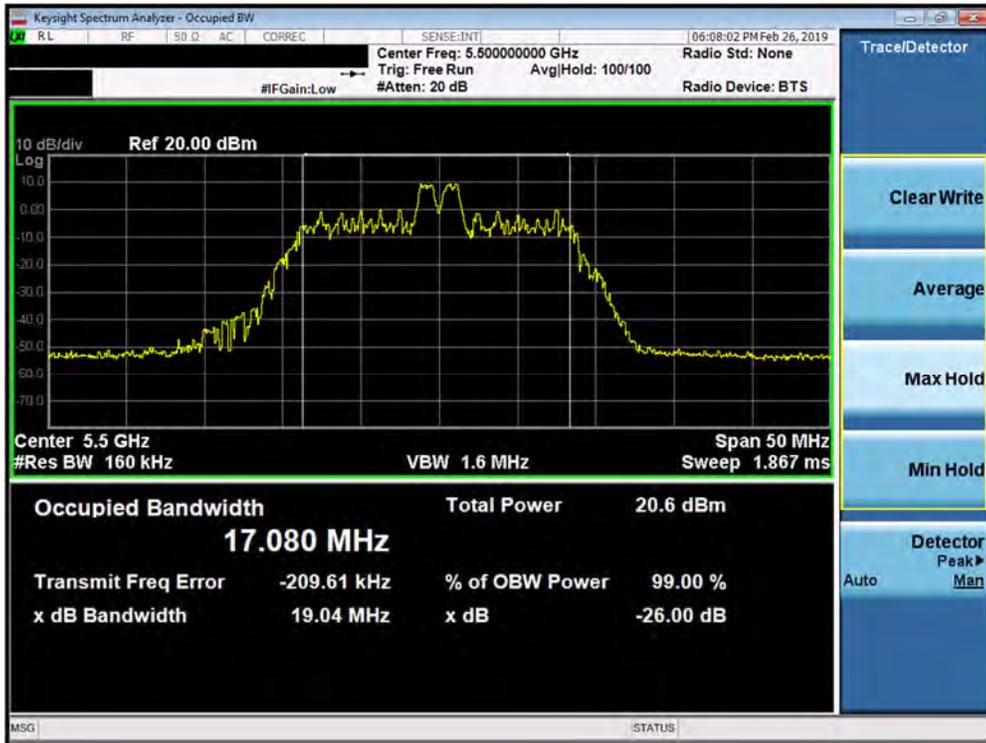


Plot 7-55. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

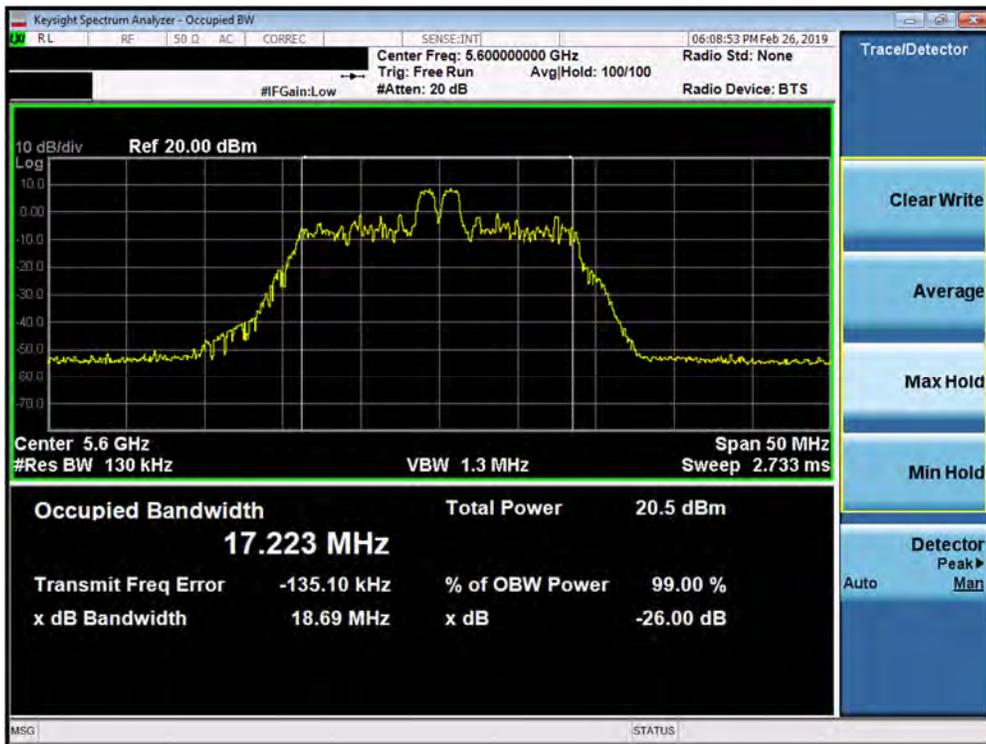

Plot 7-56. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 47 of 330

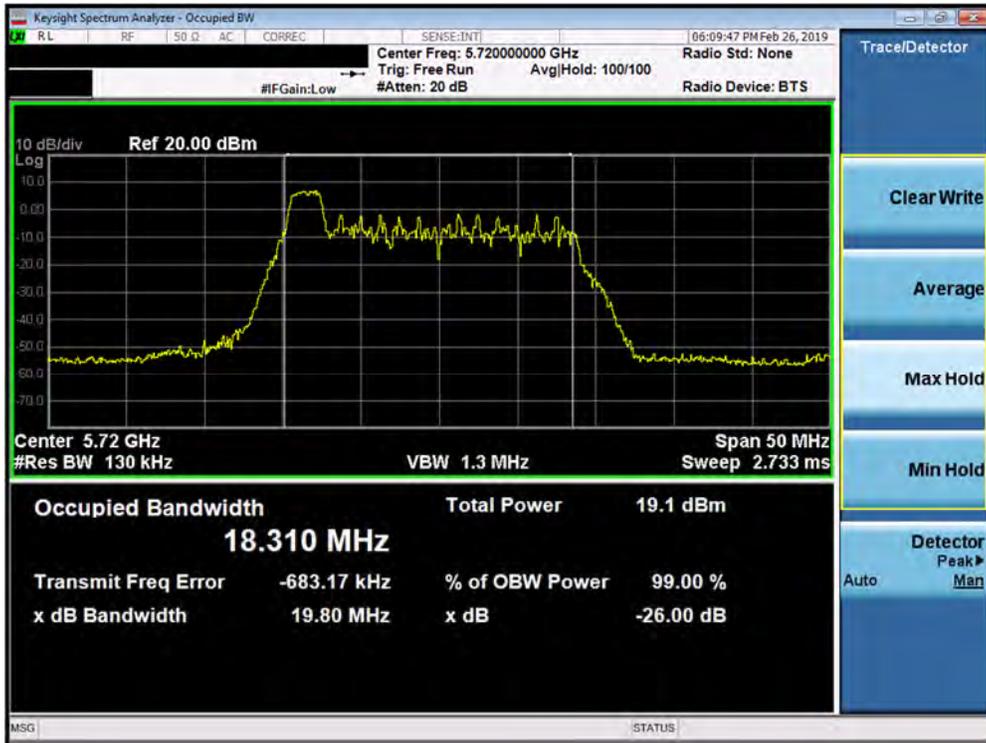

Plot 7-57. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)



Plot 7-58. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMF907N			<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 48 of 330		



Plot 7-59. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)




Plot 7-60. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 49 of 330




Plot 7-61. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

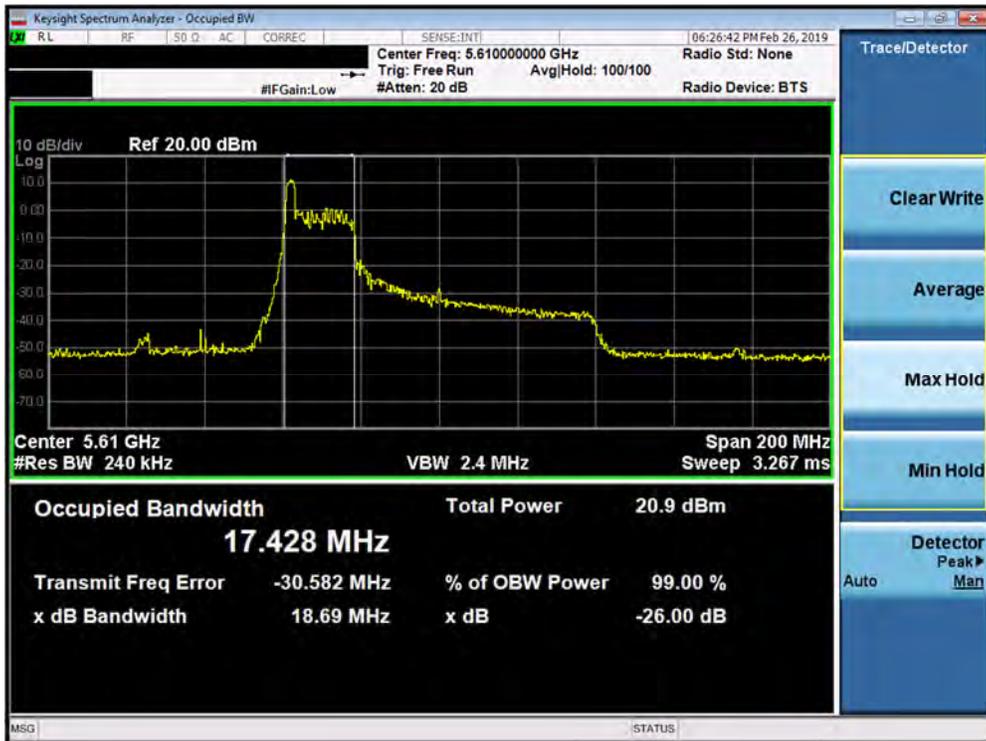

Plot 7-62. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 50 of 330

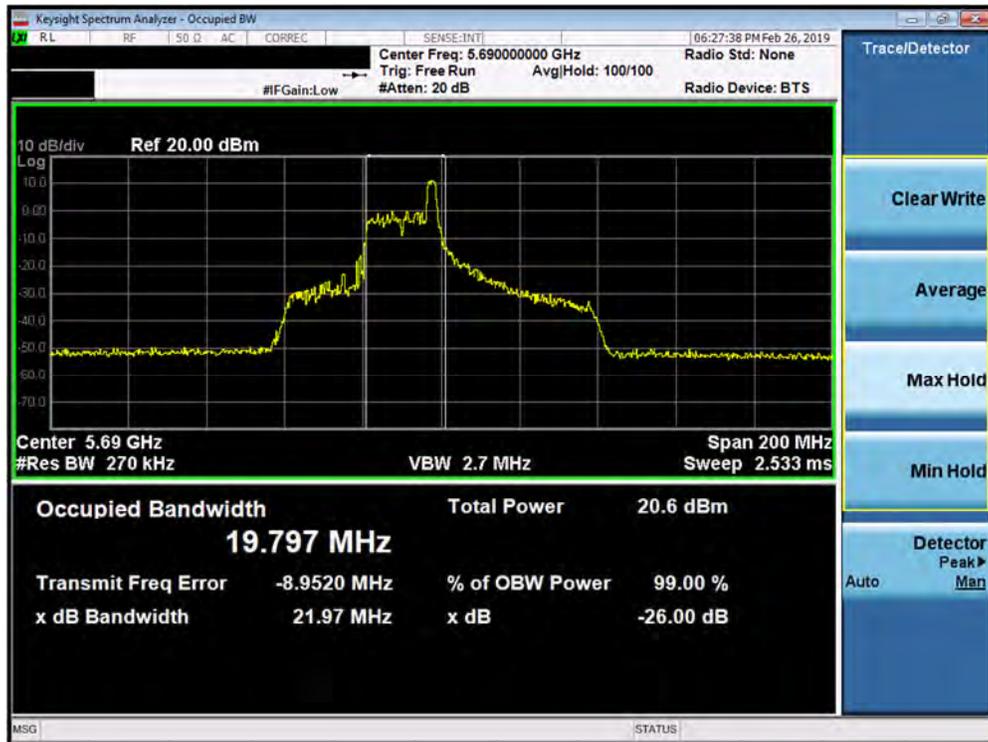

Plot 7-63. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)


FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 51 of 330	

### SISO Antenna-2 26dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	21.83
	5200	40	ax (20MHz)	242T	MCS0	21.74
	5240	48	ax (20MHz)	242T	MCS0	21.30
	5190	38	ax (40MHz)	484T	MCS0	40.04
	5230	46	ax (40MHz)	484T	MCS0	39.98
	5210	42	ax (80MHz)	996T	MCS0	80.99
Band 2A	5260	52	ax (20MHz)	242T	MCS0	21.35
	5280	56	ax (20MHz)	242T	MCS0	21.54
	5320	64	ax (20MHz)	242T	MCS0	21.28
	5270	54	ax (40MHz)	484T	MCS0	39.87
	5310	62	ax (40MHz)	484T	MCS0	39.93
	5290	58	ax (80MHz)	996T	MCS0	81.32
Band 2C	5500	100	ax (20MHz)	242T	MCS0	21.32
	5600	120	ax (20MHz)	242T	MCS0	21.21
	5720	144	ax (20MHz)	242T	MCS0	21.31
	5510	102	ax (40MHz)	484T	MCS0	39.96
	5590	118	ax (40MHz)	484T	MCS0	39.94
	5710	142	ax (40MHz)	484T	MCS0	40.21
	5530	106	ax (80MHz)	996T	MCS0	80.85
	5610	122	ax (80MHz)	996T	MCS0	80.81
	5690	138	ax (80MHz)	996T	MCS0	81.07

**Table 7-5. Conducted Bandwidth Measurements SISO ANT2 (Full Tones)**

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 52 of 330

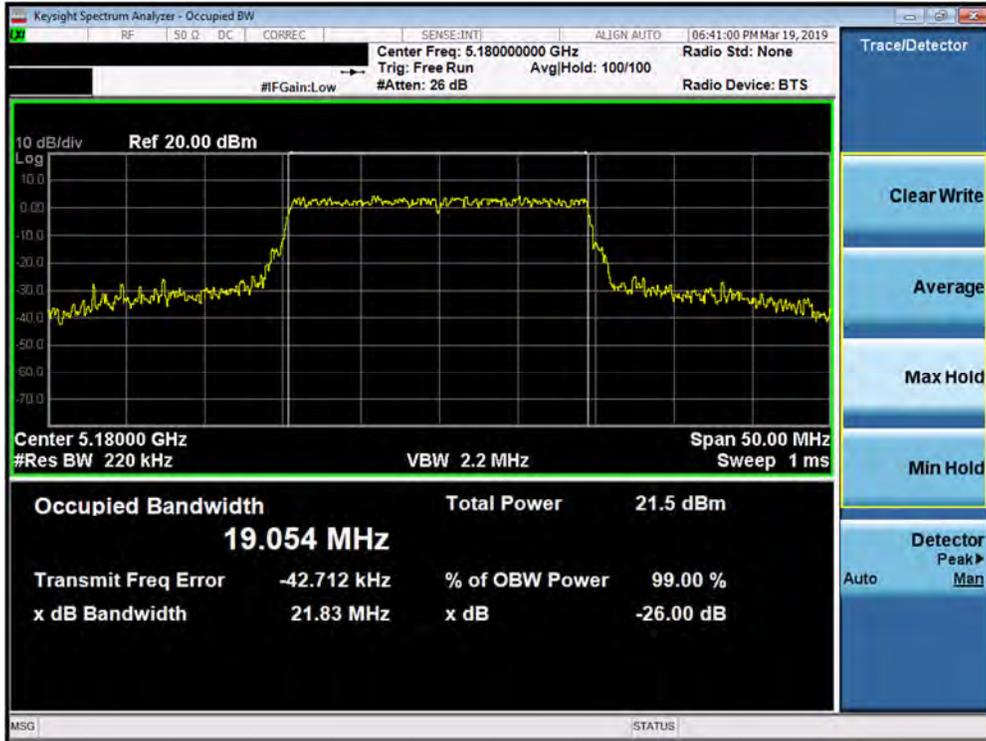


Plot 7-64. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

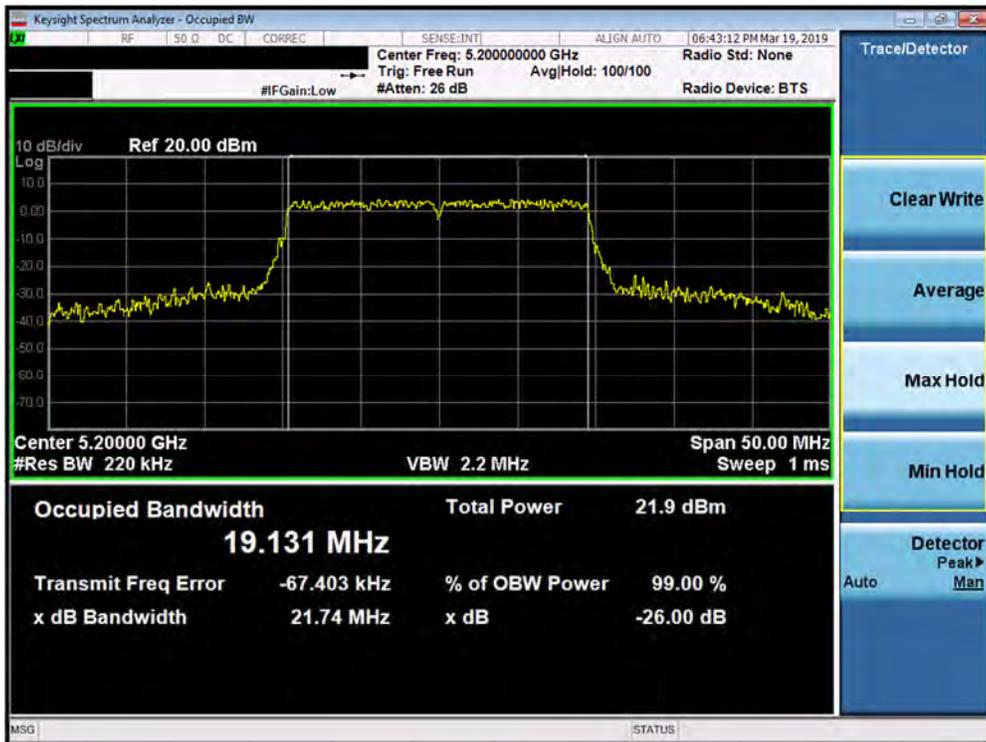


Plot 7-65. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 53 of 330

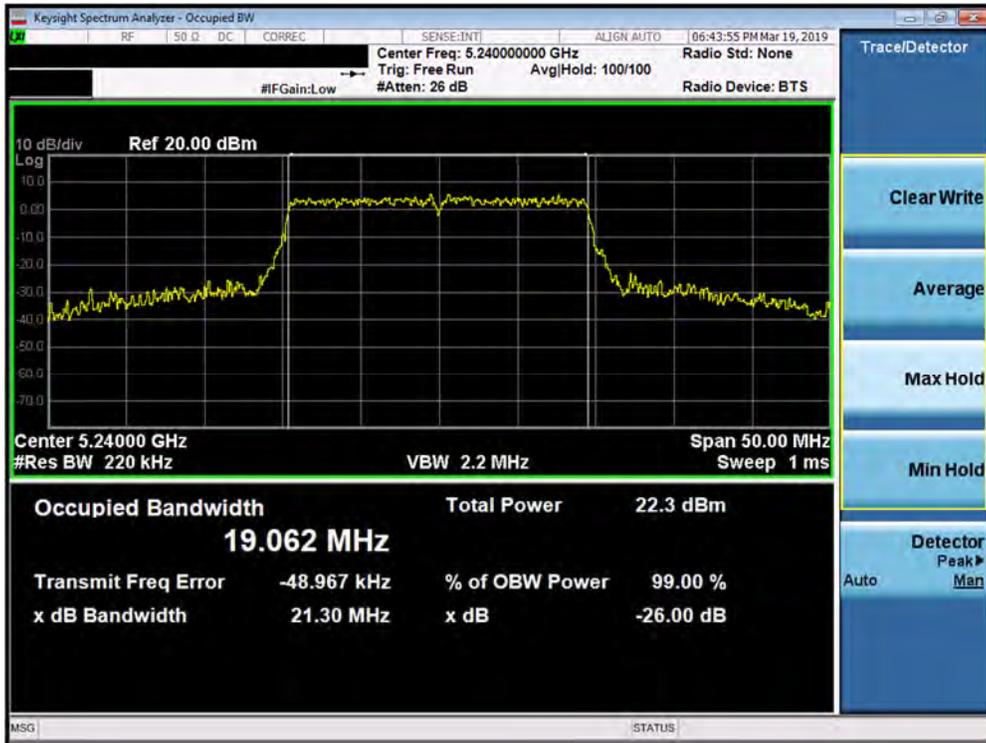


Plot 7-66. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

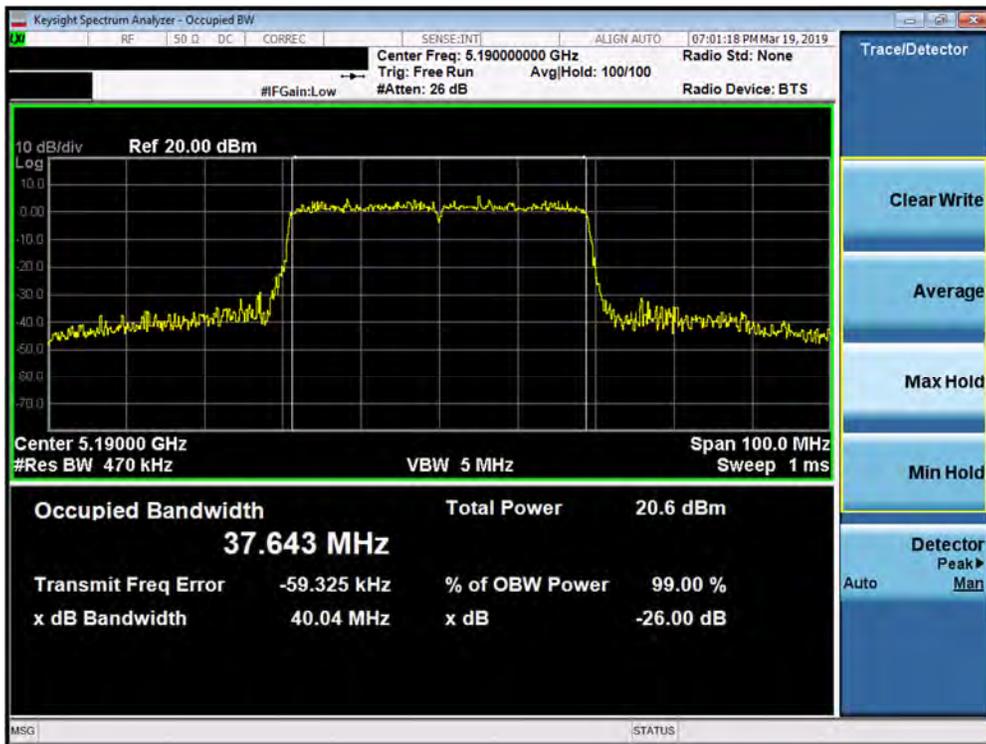


Plot 7-67. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 54 of 330

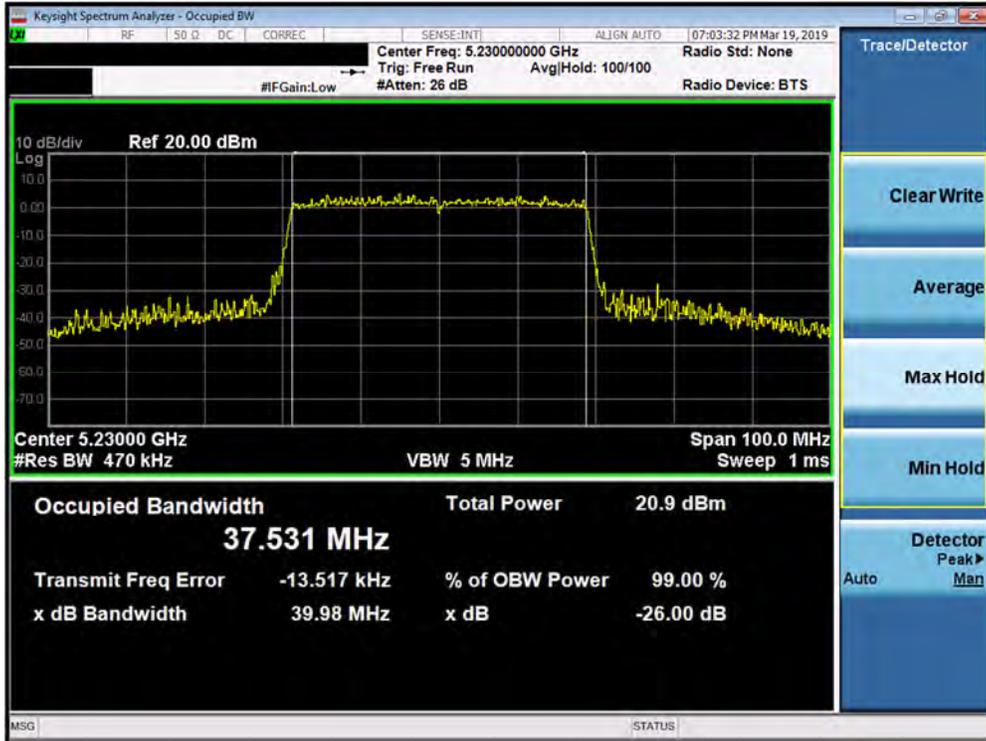


Plot 7-68. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

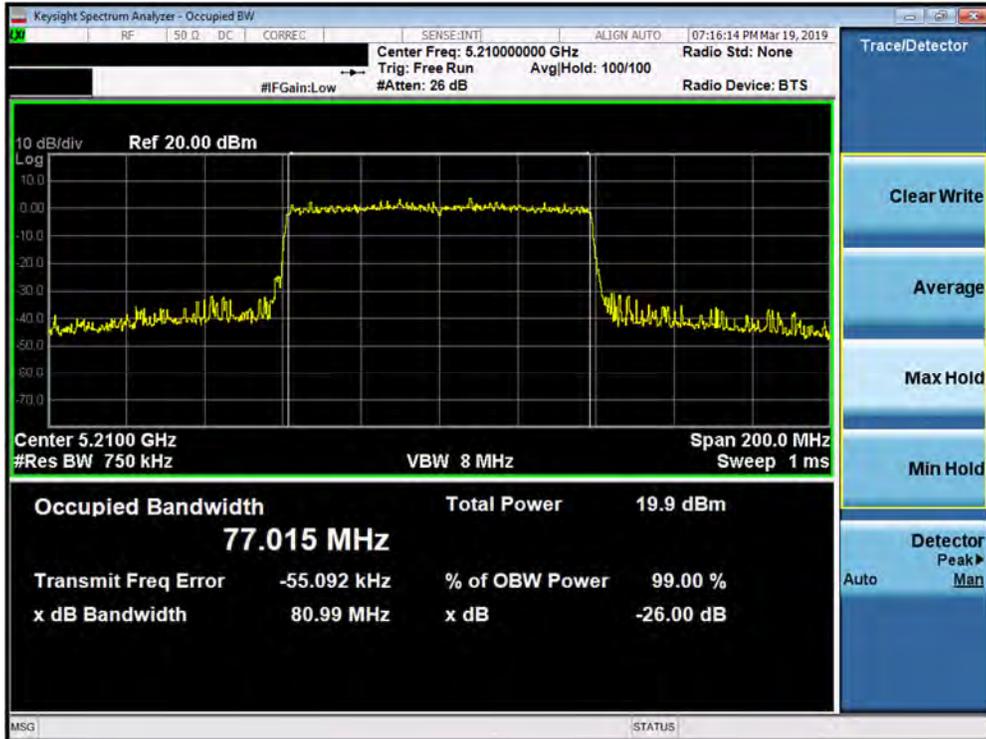


Plot 7-69. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 55 of 330

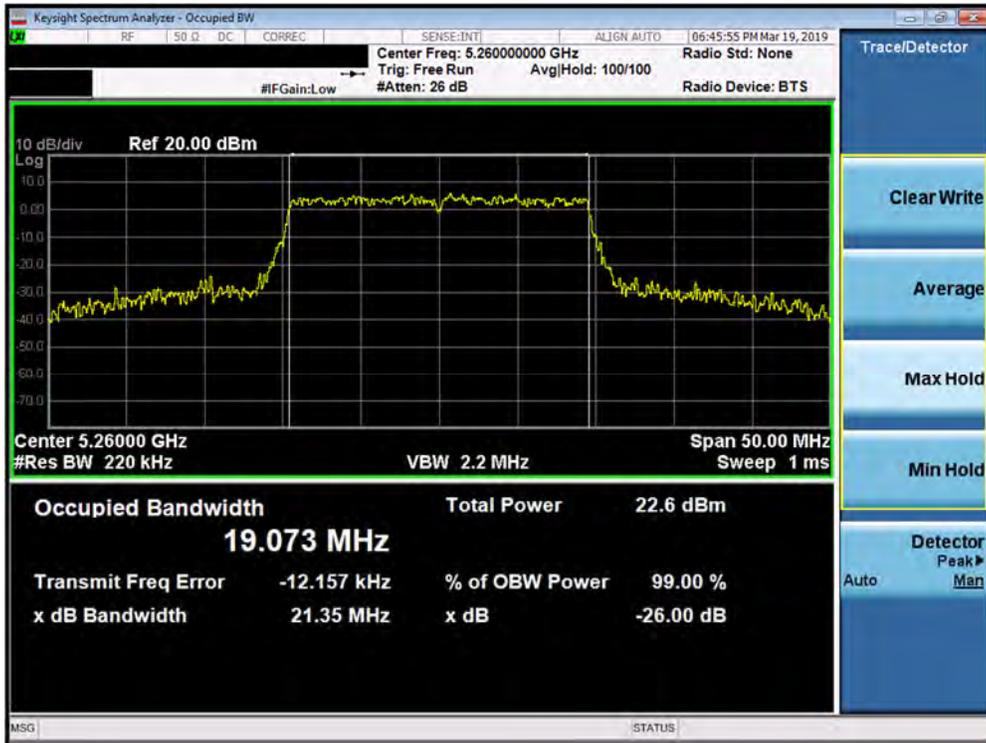


Plot 7-70. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

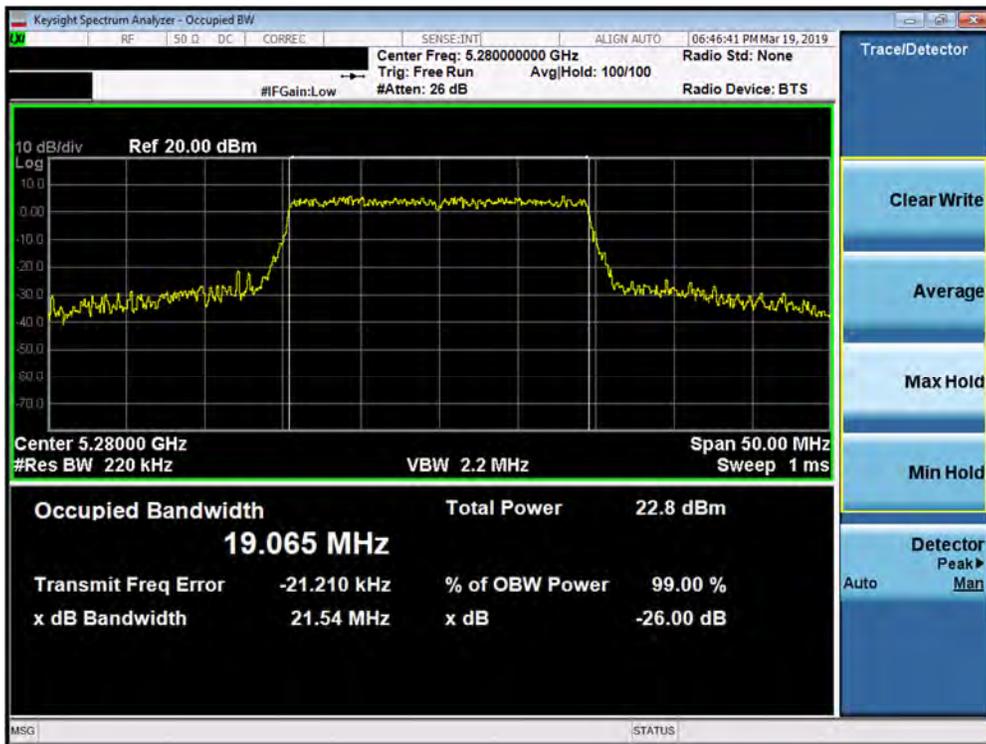

Plot 7-71. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 56 of 330

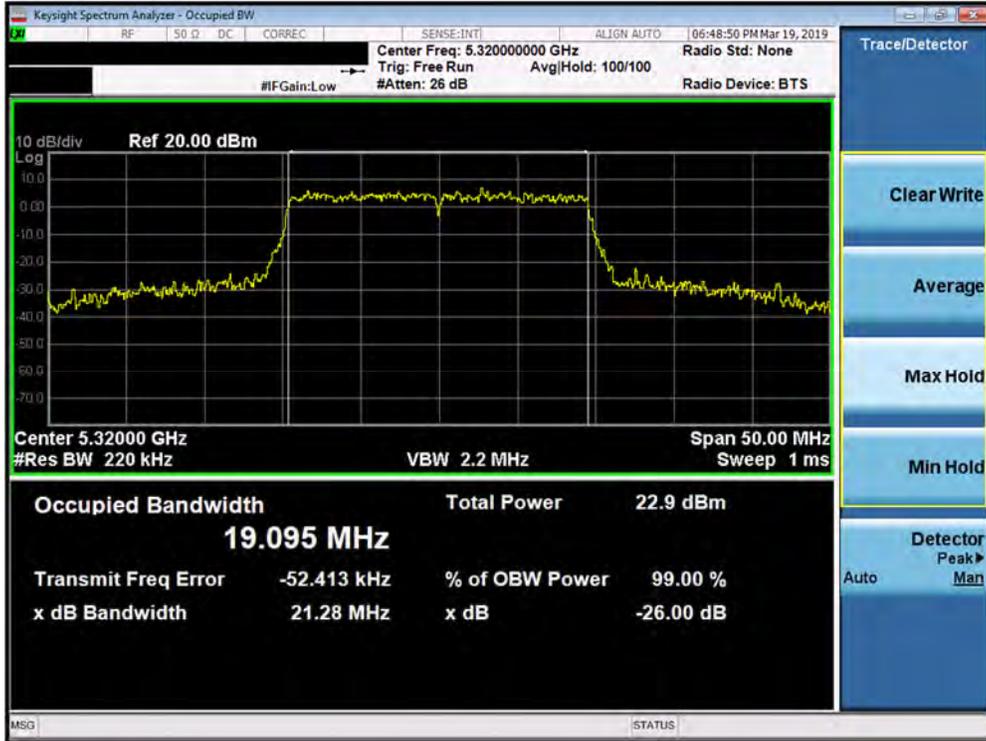

Plot 7-72. 26dB Bandwidth Plot SISO ANT2 (20 MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)




Plot 7-73. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 57 of 330




Plot 7-74. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

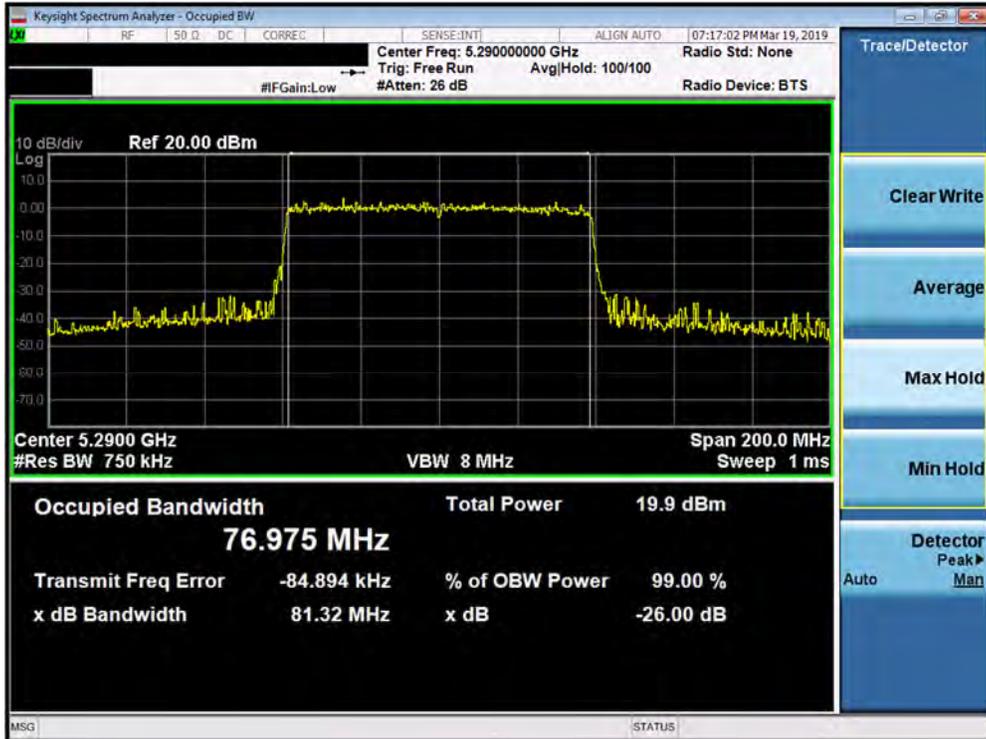


Plot 7-75. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 58 of 330

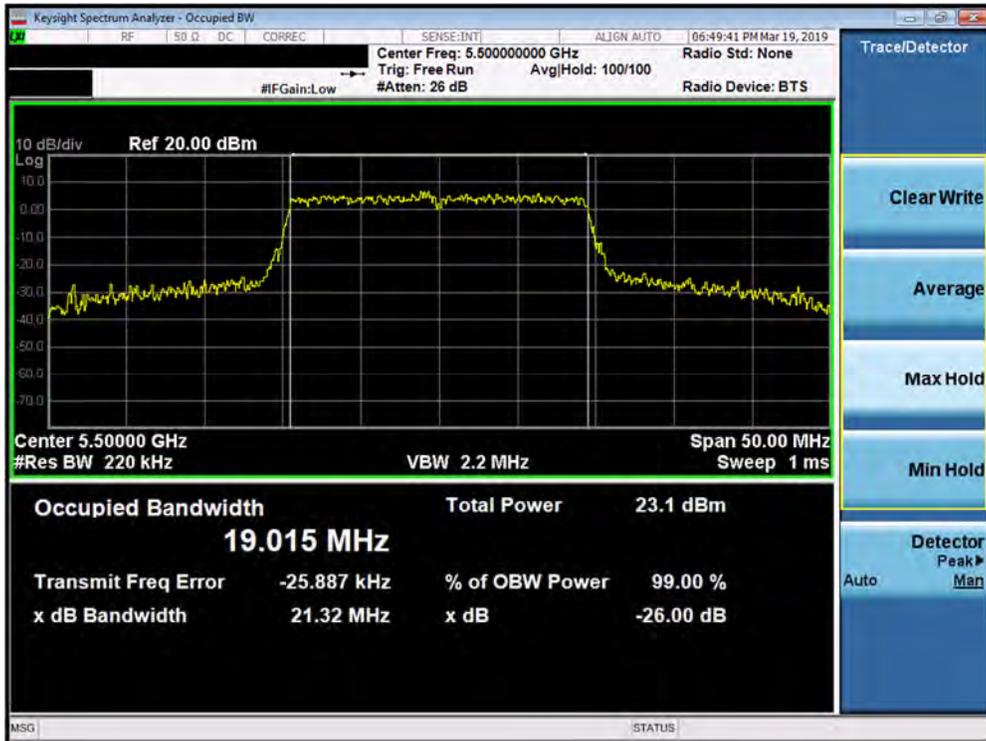


Plot 7-76. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

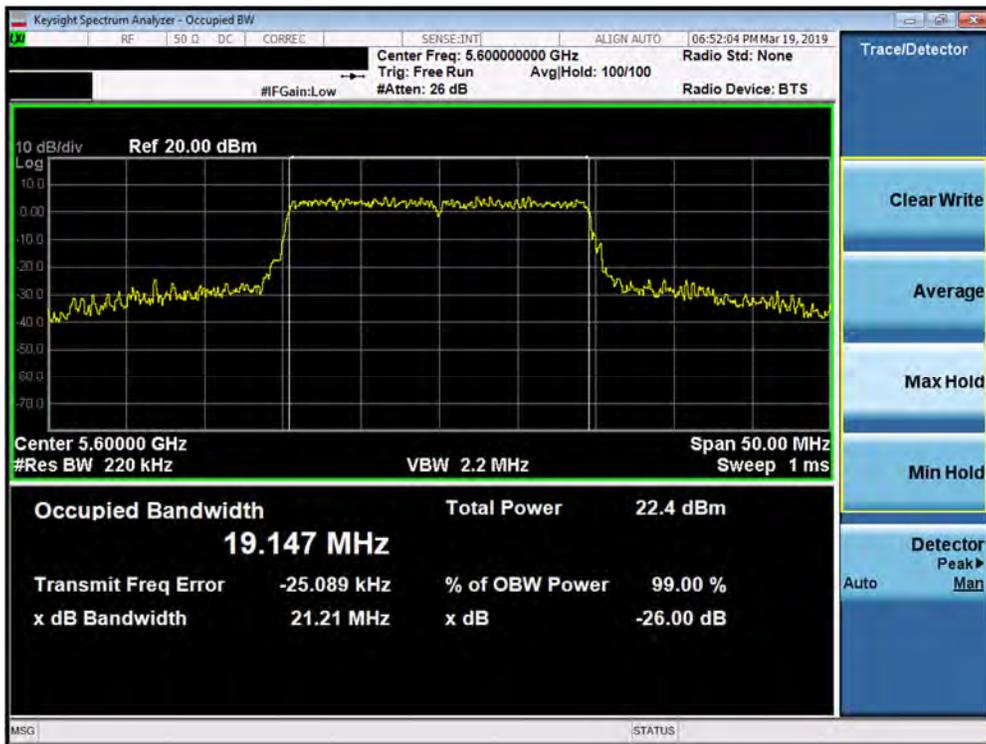


Plot 7-77. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 59 of 330

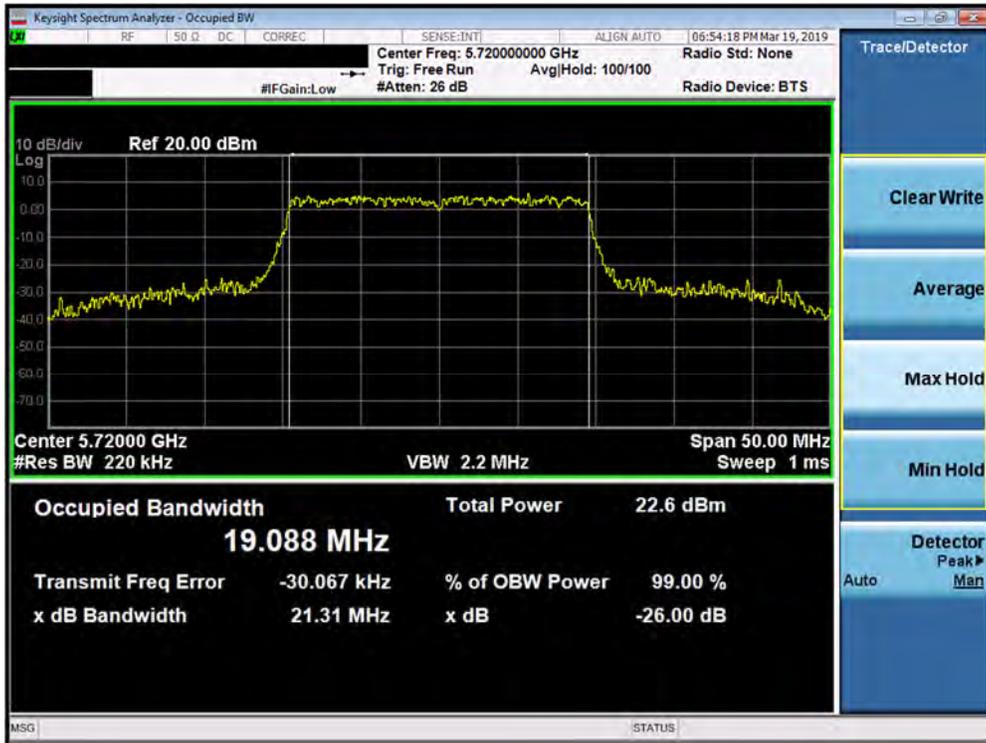


Plot 7-78. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

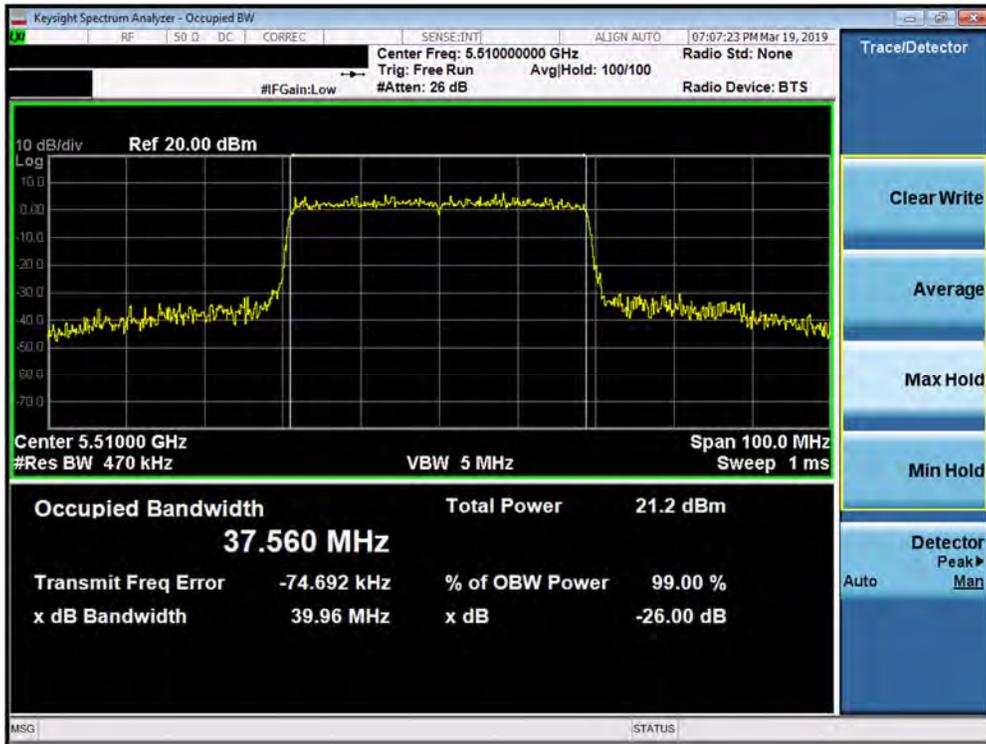


Plot 7-79. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 60 of 330

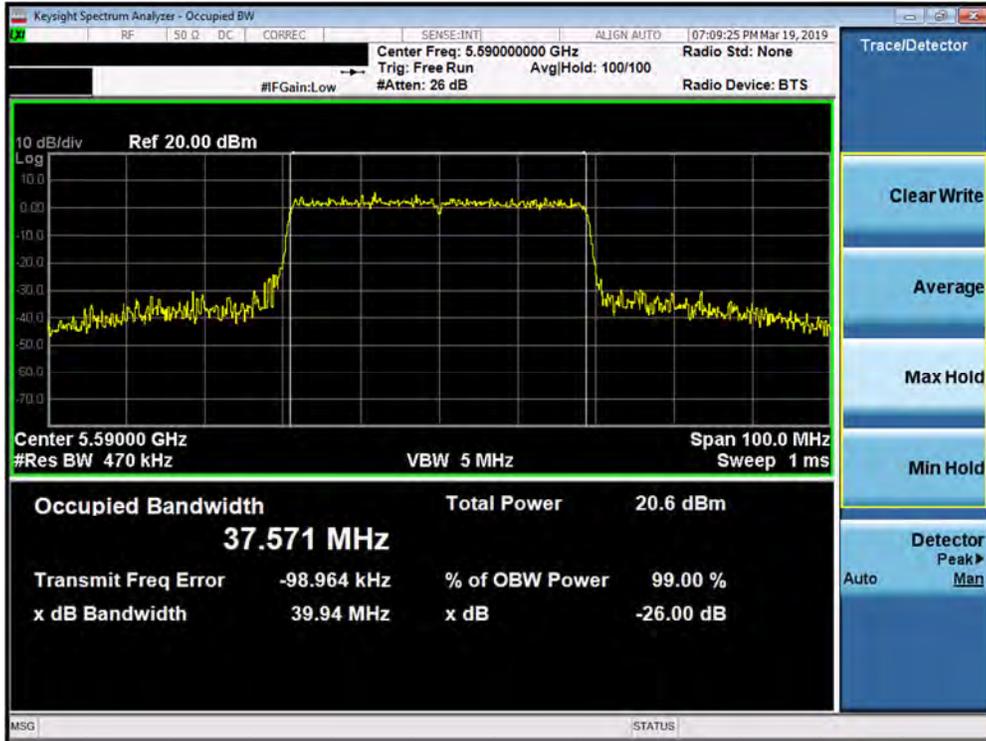

Plot 7-80. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

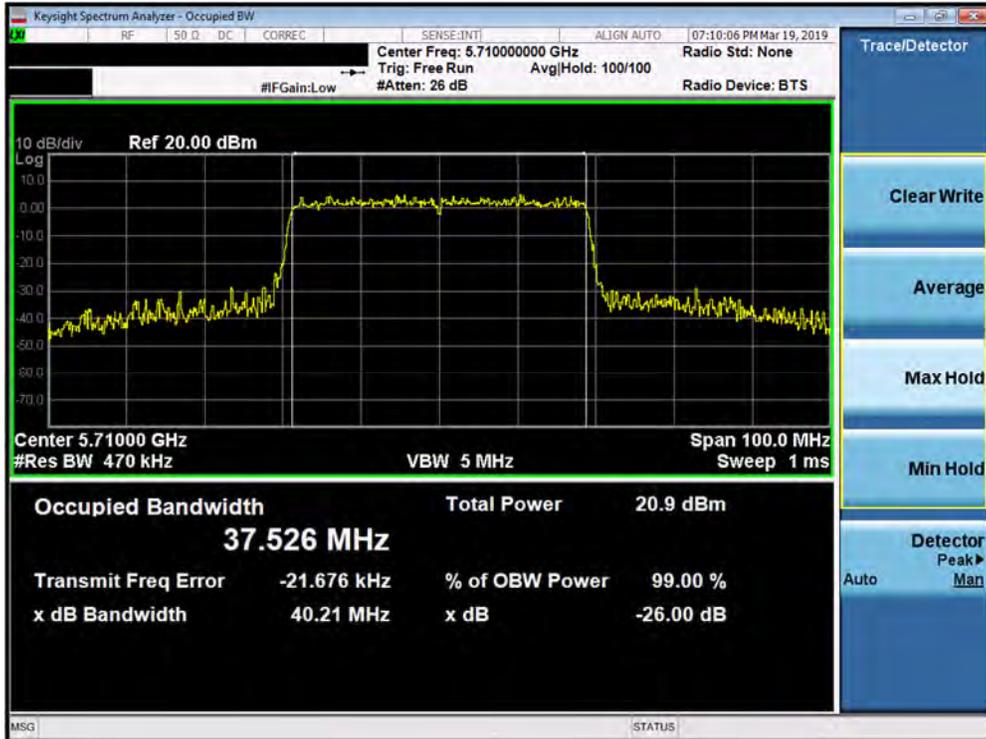


Plot 7-81. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 61 of 330



Plot 7-82. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)

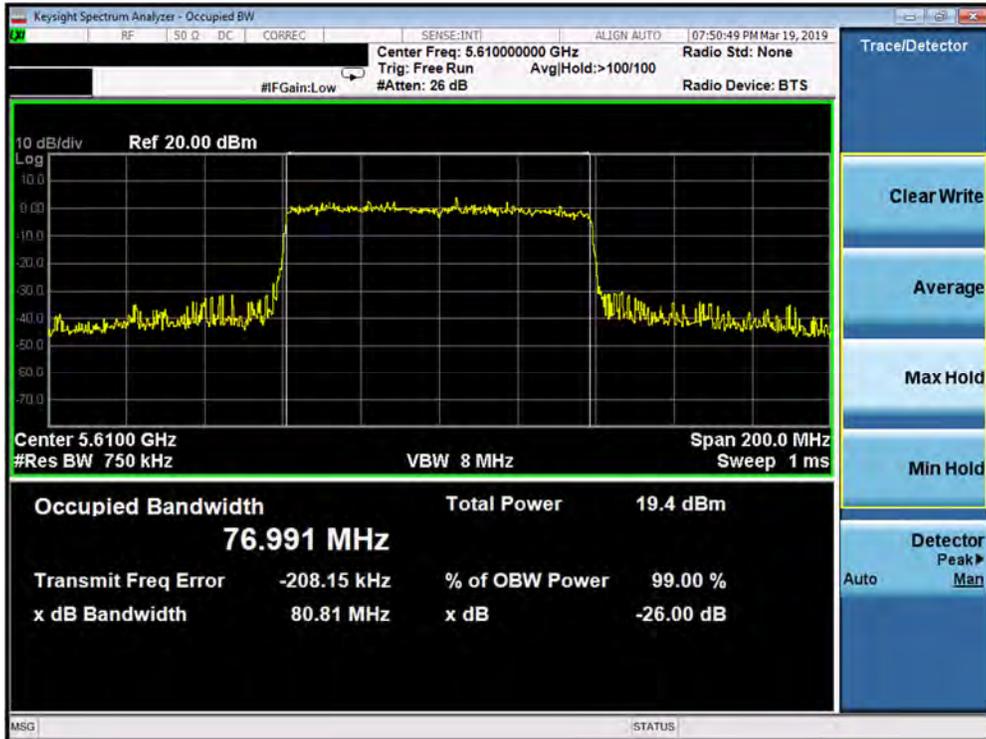

Plot 7-83. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 62 of 330



Plot 7-84. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 63 of 330

### 7.3 6dB Bandwidth Measurement – 802.11ax OFDMA §15.407 (e); RSS-Gen [6.7]

#### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

***In the 5.725 – 5.850GHz band, the 6dB bandwidth must be  $\geq$  500 kHz.***

#### Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2  
KDB 789033 D02 v02r01 – Section C

#### Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to  $X = 6$ . The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

#### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-2. Test Instrument & Measurement Setup**

#### Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 64 of 330	

### SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	ax (20MHz)	26T	MCS0	2.13
	5785	157	ax (20MHz)	26T	MCS0	2.12
	5825	165	ax (20MHz)	26T	MCS0	2.16
	5755	151	ax (40MHz)	26T	MCS0	2.11
	5795	159	ax (40MHz)	26T	MCS0	2.12
	5775	155	ax (80MHz)	26T	MCS0	2.28

**Table 7-6. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)**

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 65 of 330	

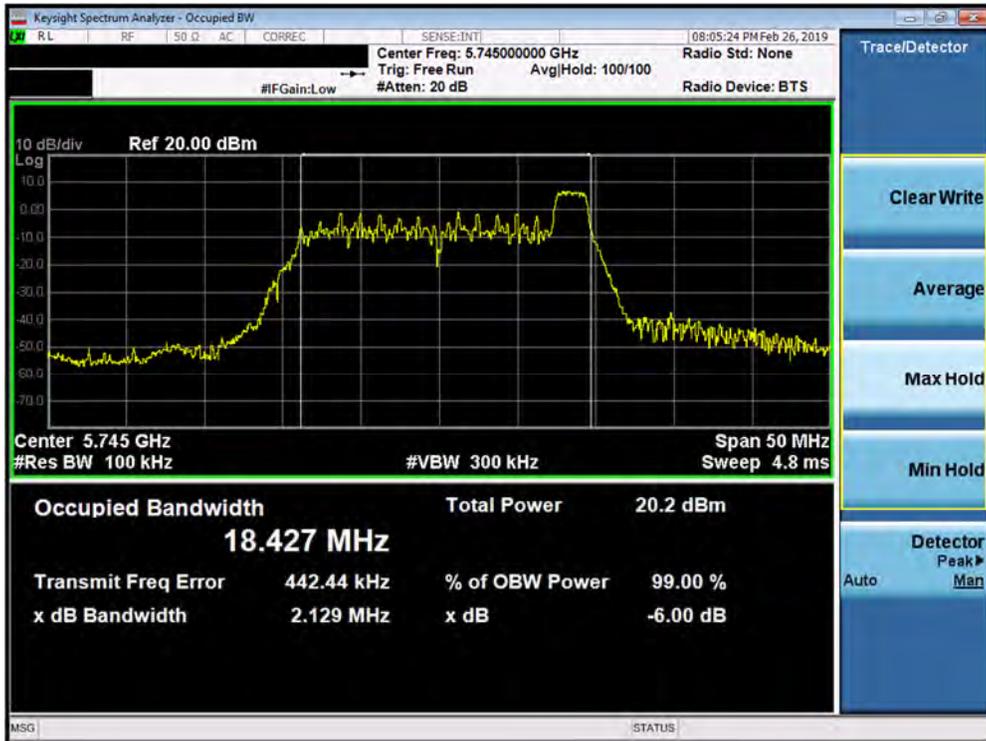


Plot 7-85. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

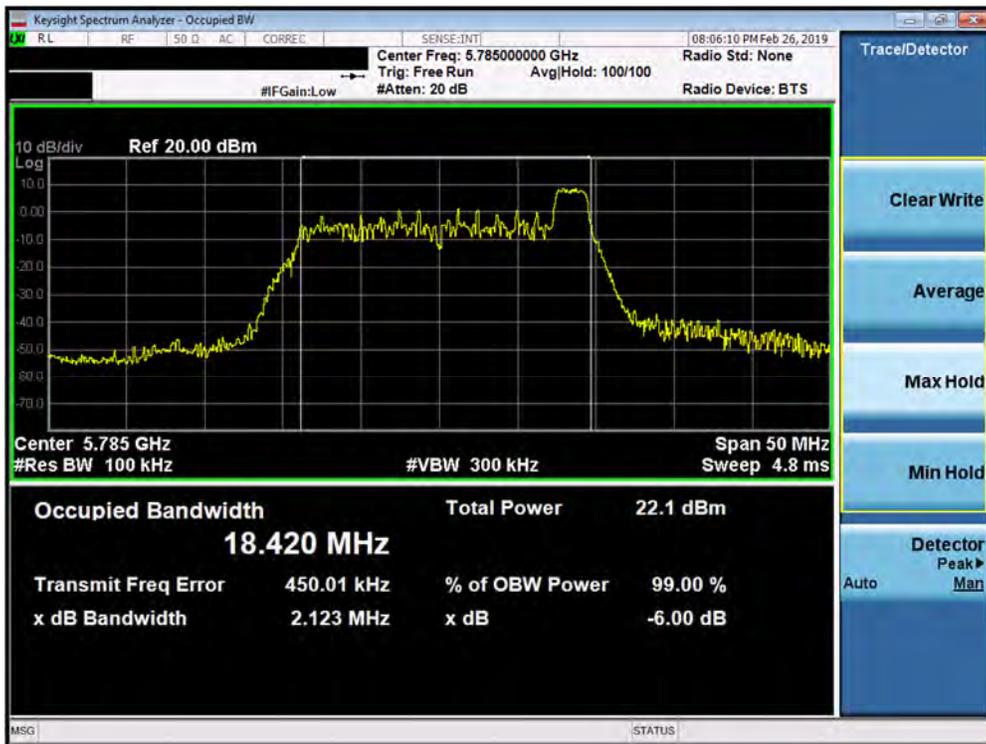


Plot 7-86. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 66 of 330

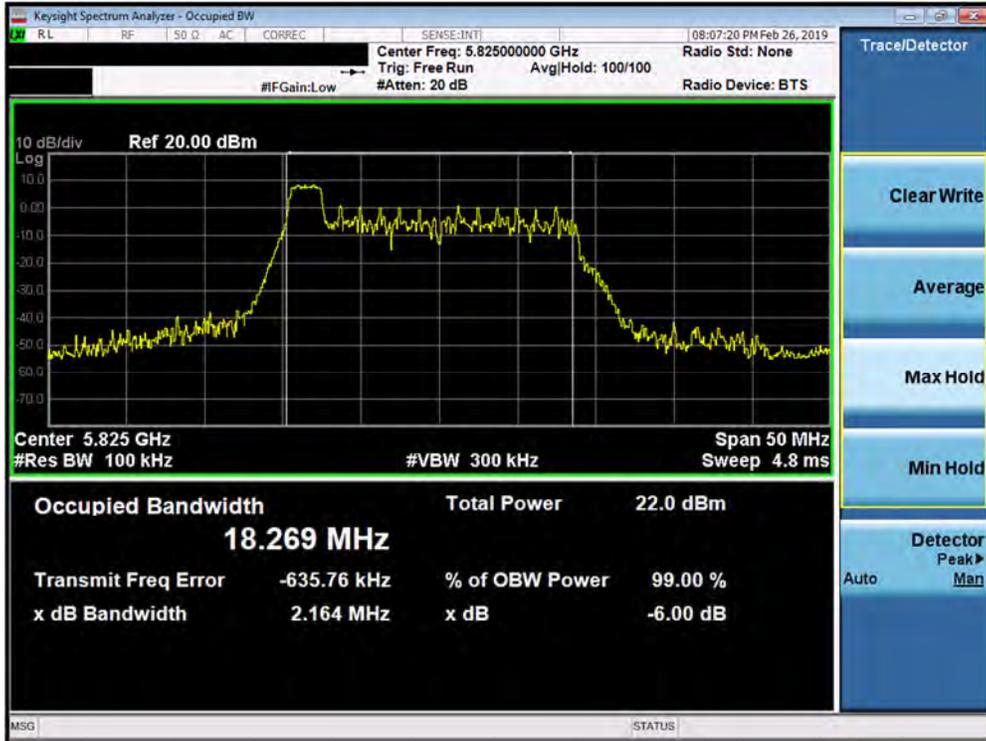

Plot 7-87. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

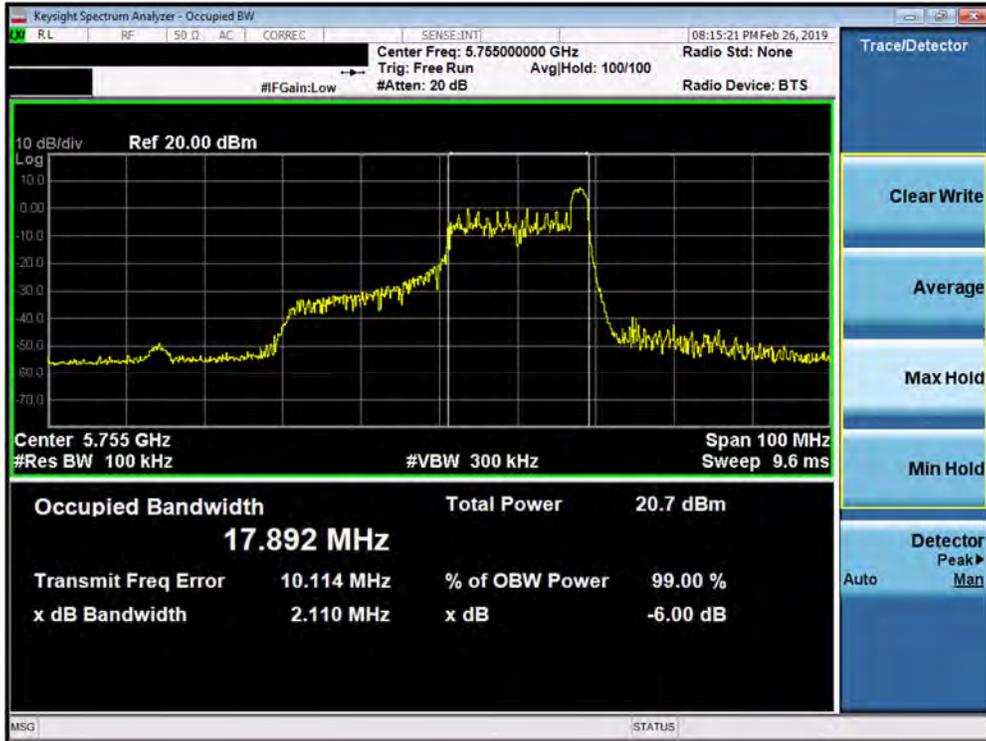


Plot 7-88. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 67 of 330



Plot 7-89. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

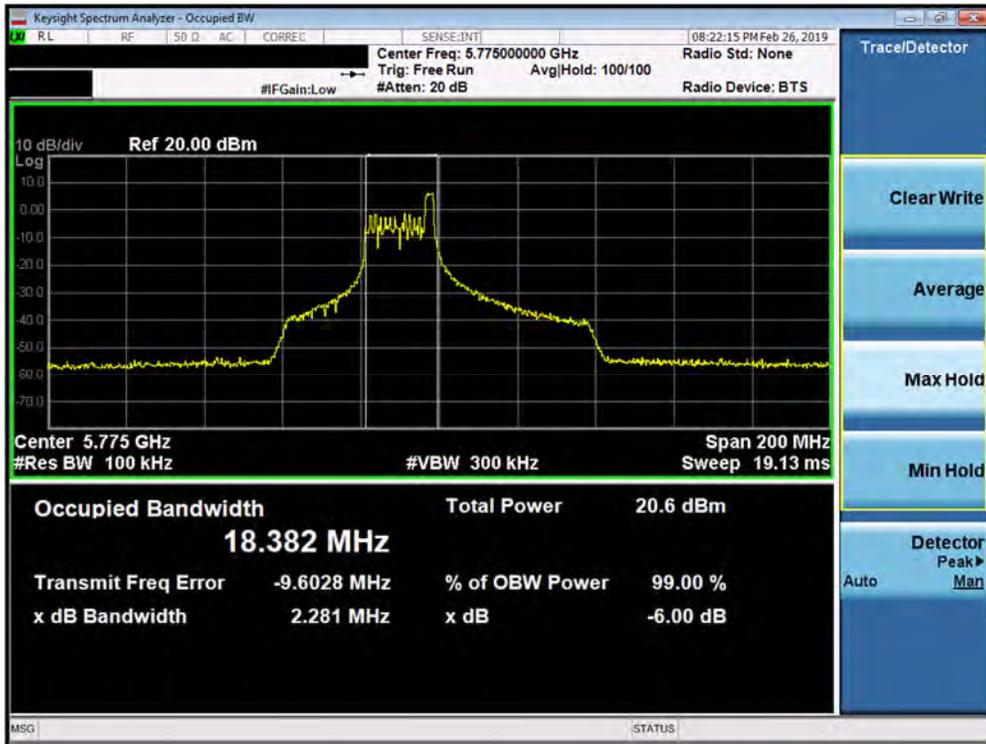

Plot 7-90. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)


FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 68 of 330

### SISO Antenna-1 6 dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	ax (20MHz)	242T	MCS0	36.07
	5785	157	ax (20MHz)	242T	MCS0	38.21
	5825	165	ax (20MHz)	242T	MCS0	35.07
	5755	151	ax (40MHz)	242T	MCS0	39.92
	5795	159	ax (40MHz)	242T	MCS0	39.75
	5775	155	ax (80MHz)	242T	MCS0	80.90

**Table 7-7. Conducted Bandwidth Measurements SISO ANT1 (Full Tones)**

FCC ID: A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 69 of 330	

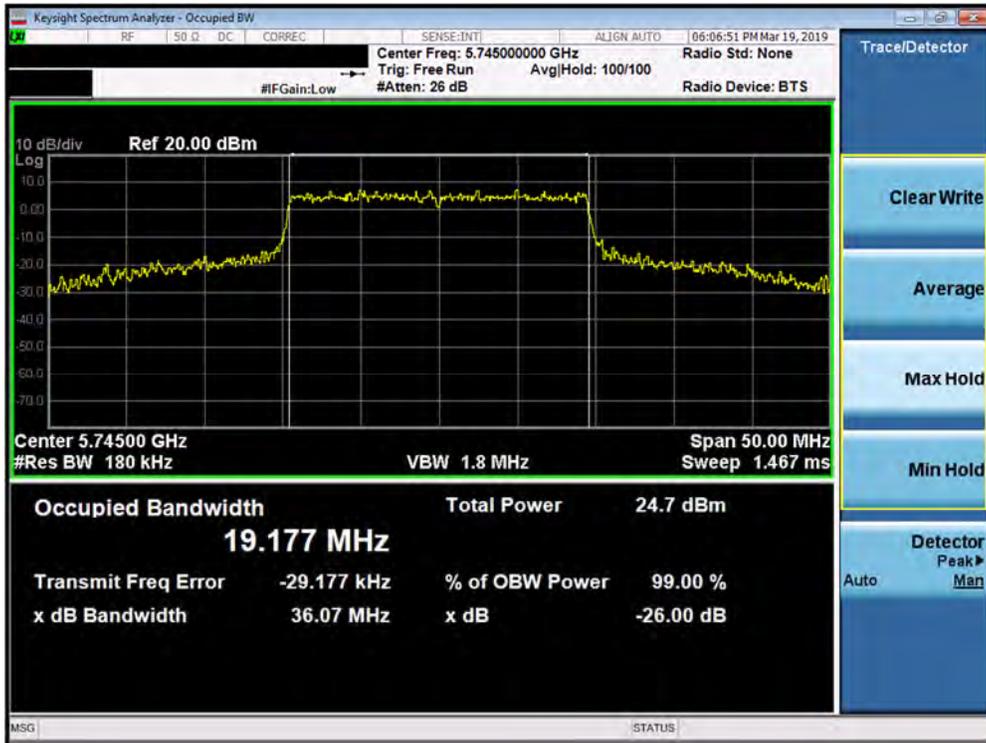

Plot 7-91. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 149)

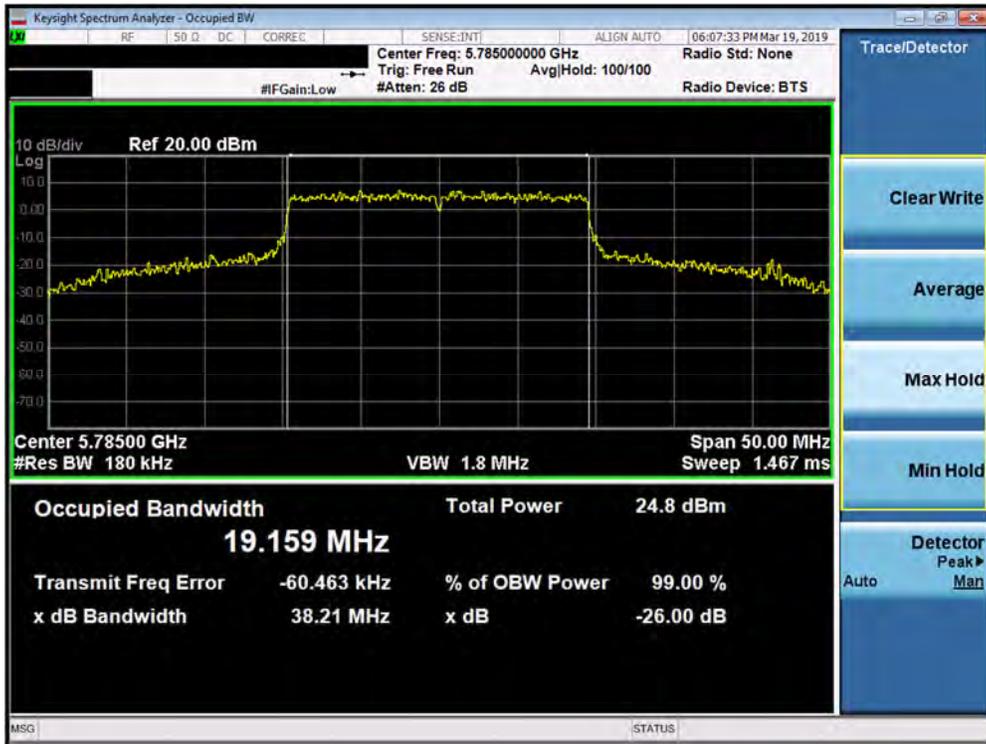


Plot 7-92. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.		MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 70 of 330



Plot 7-93. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 165)

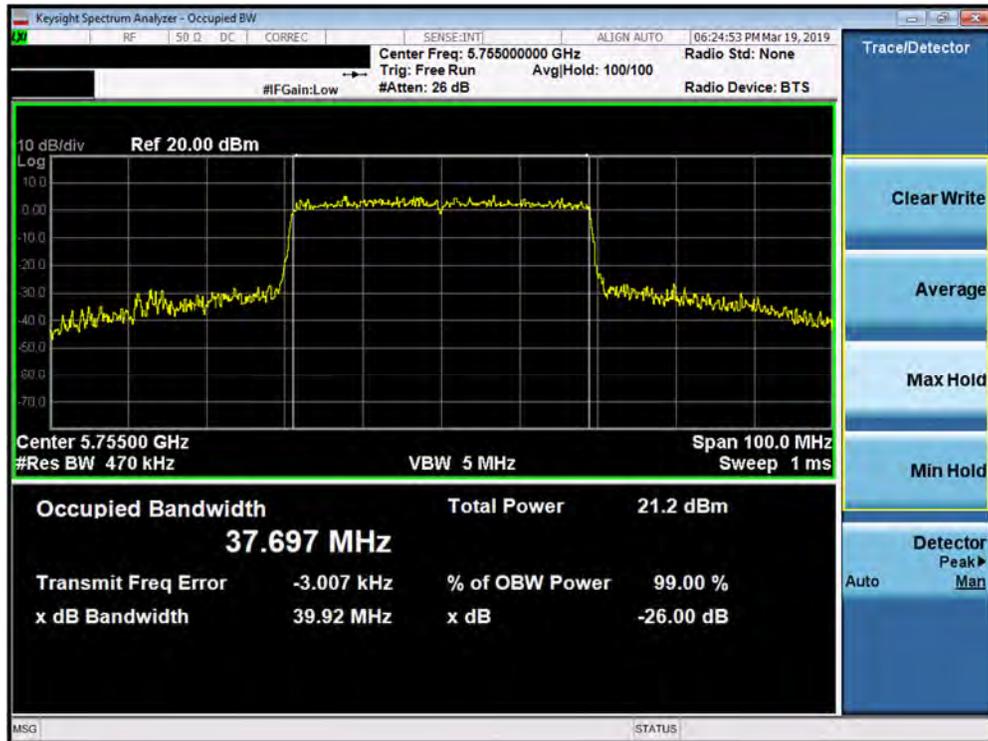


Plot 7-94. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 71 of 330



Plot 7-95. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 159)

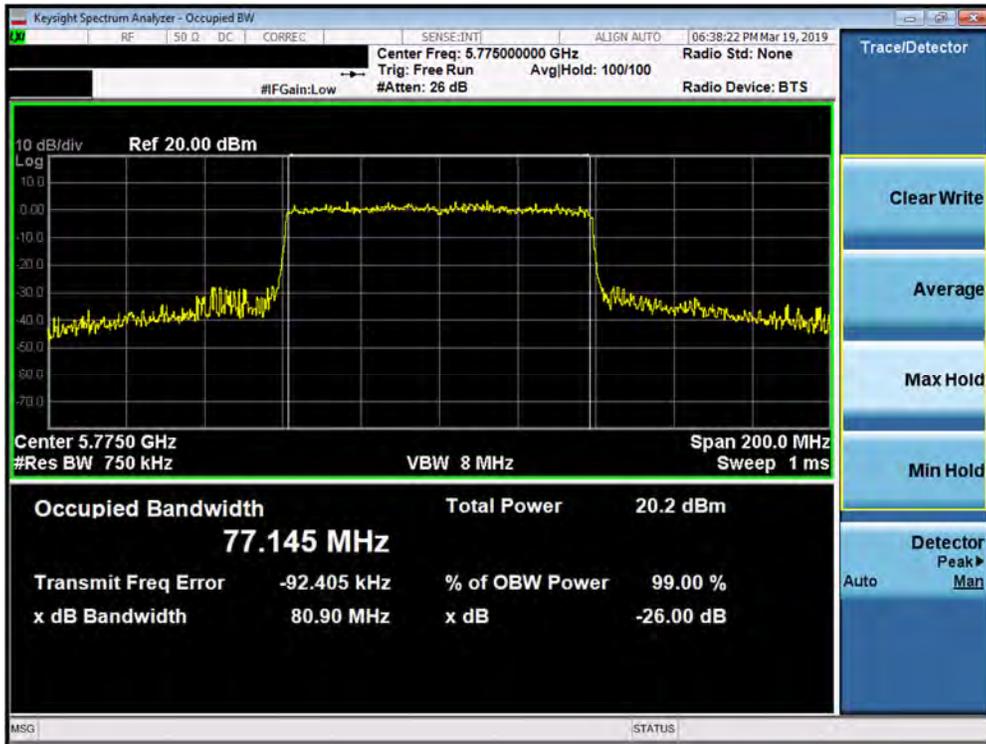

Plot 7-96. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)


FCC ID: A3LSMF907N	<b>MEASUREMENT REPORT</b> (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 72 of 330

### SISO Antenna-2 6dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	ax (20MHz)	26T	MCS0	2.64
	5785	157	ax (20MHz)	26T	MCS0	2.12
	5825	165	ax (20MHz)	26T	MCS0	2.11
	5755	151	ax (40MHz)	26T	MCS0	2.17
	5795	159	ax (40MHz)	26T	MCS0	2.13
	5775	155	ax (80MHz)	26T	MCS0	2.29

**Table 7-8. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)**

<b>FCC ID:</b> A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 73 of 330

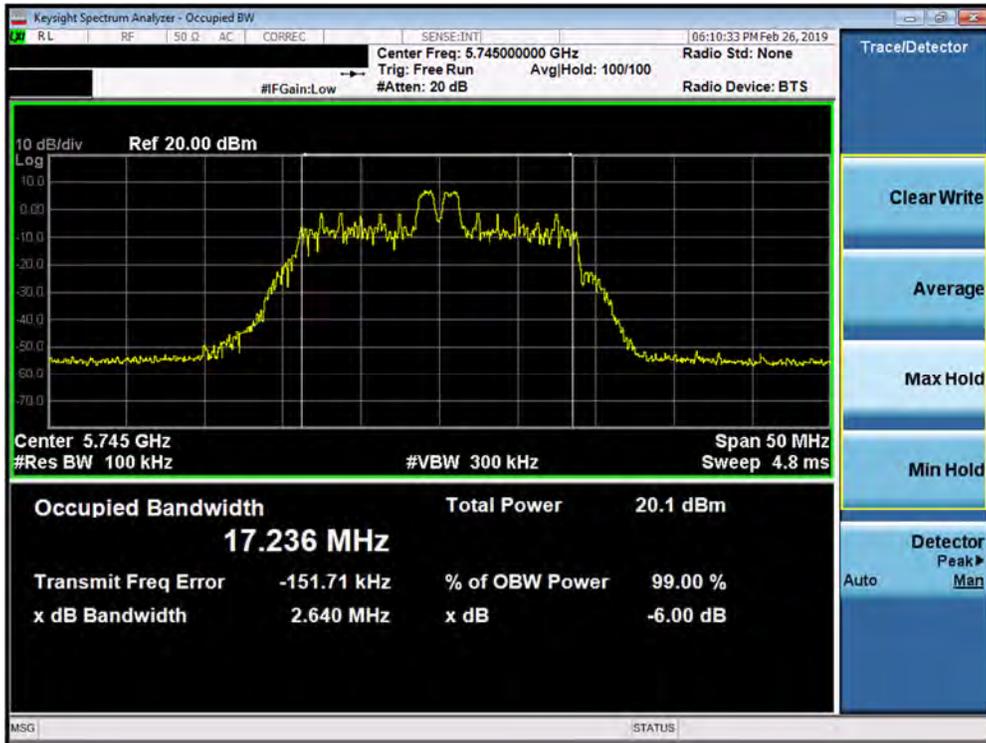


Plot 7-97. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

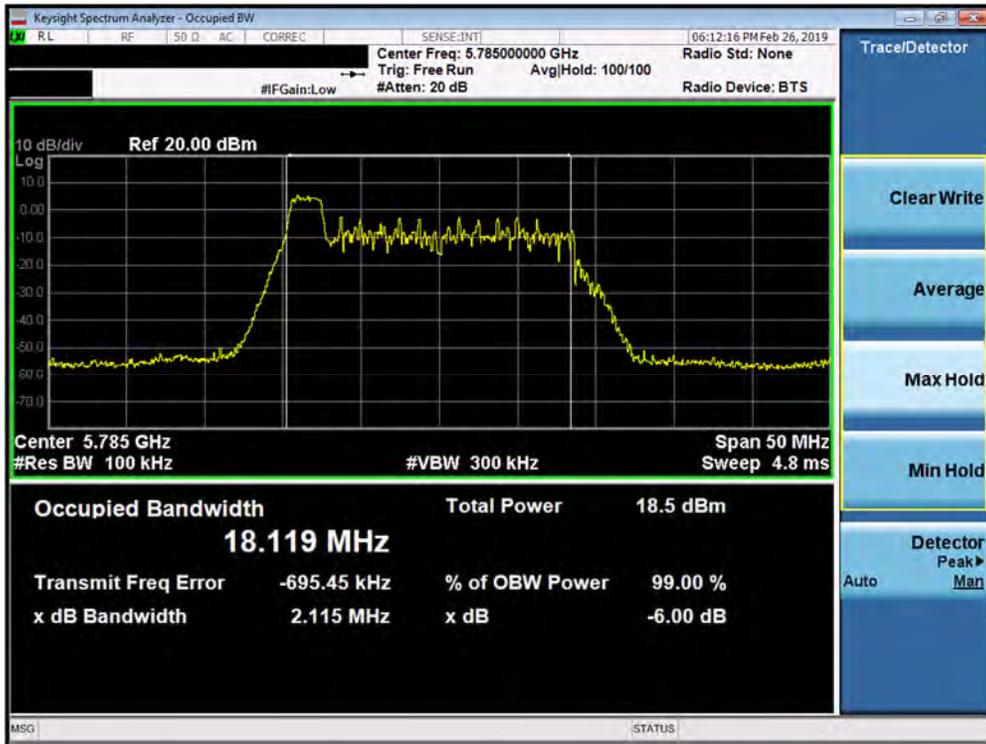


Plot 7-98. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 74 of 330

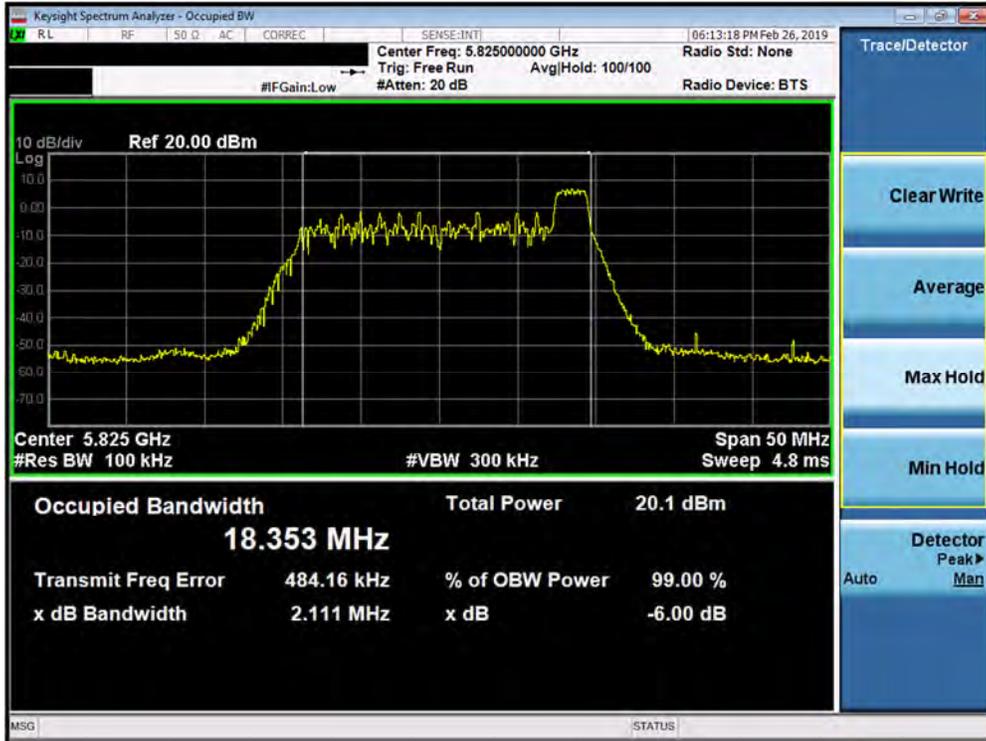

Plot 7-99. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

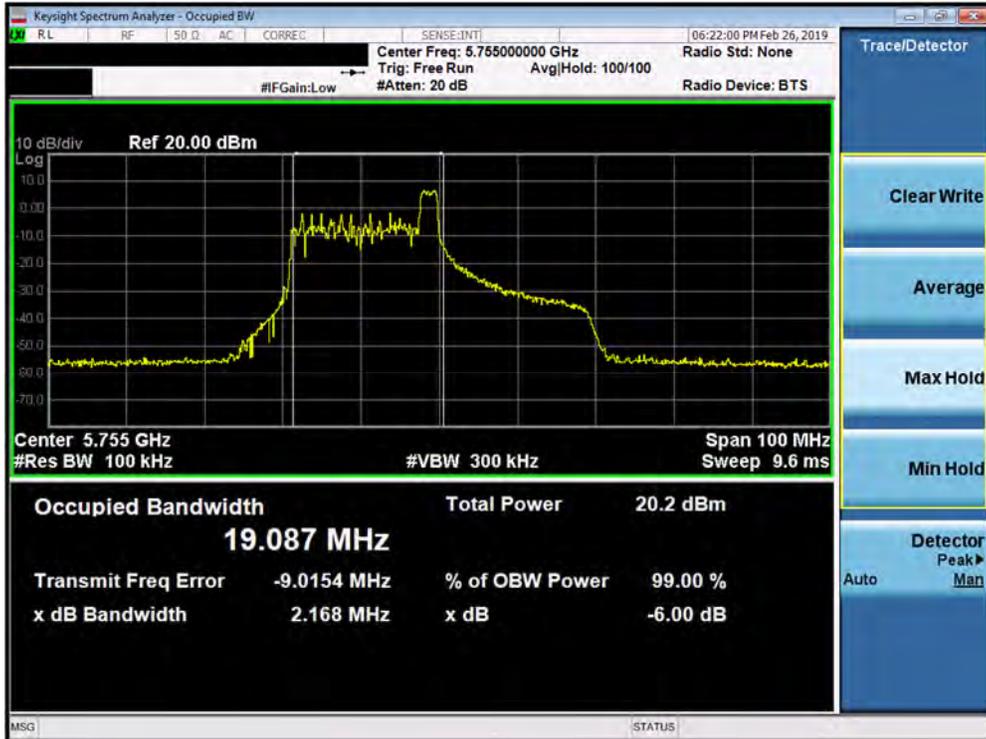


Plot 7-100. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 75 of 330



Plot 7-101. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

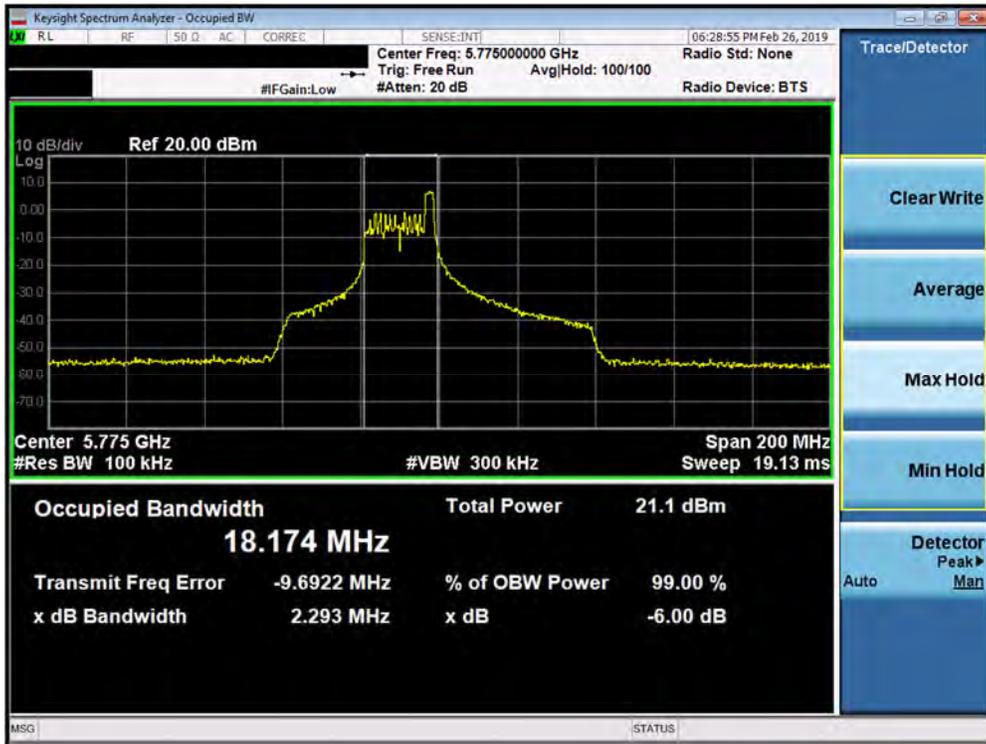

Plot 7-102. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)


FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 76 of 330

### SISO Antenna-2 6dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
<b>Band 3</b>	5745	149	ax (20MHz)	242T	MCS0	21.60
	5785	157	ax (20MHz)	242T	MCS0	21.49
	5825	165	ax (20MHz)	242T	MCS0	21.39
	5755	151	ax (40MHz)	242T	MCS0	39.99
	5795	159	ax (40MHz)	242T	MCS0	39.78
	5775	155	ax (80MHz)	242T	MCS0	81.00

**Table 7-9. Conducted Bandwidth Measurements SISO ANT2 (Full Tones)**

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 77 of 330	

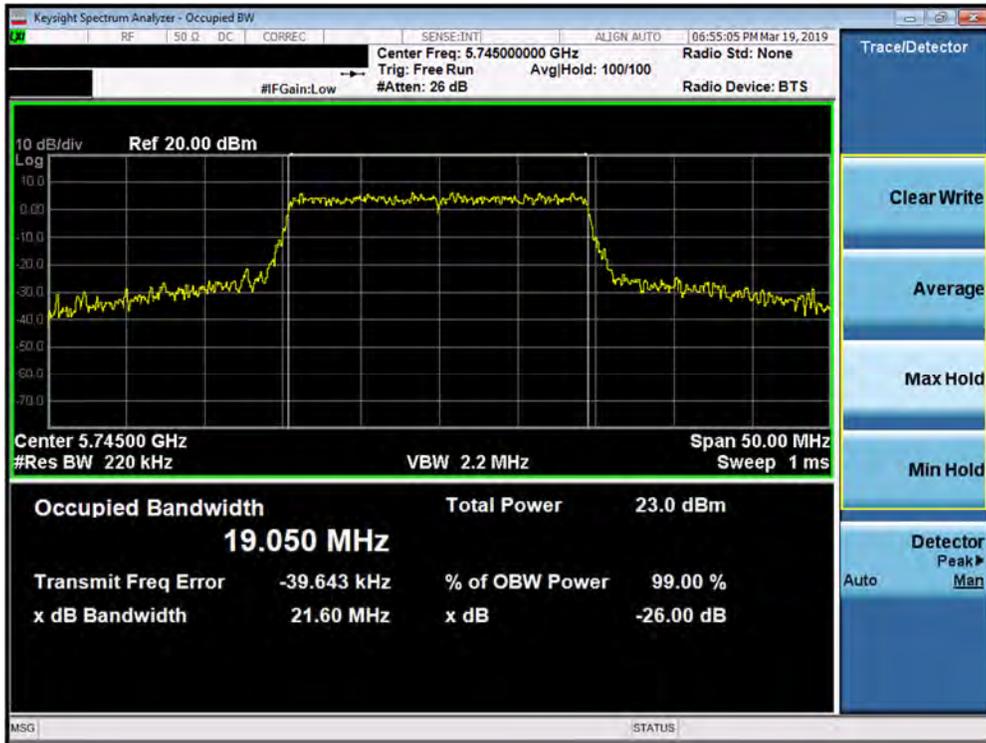


Plot 7-103. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 149)

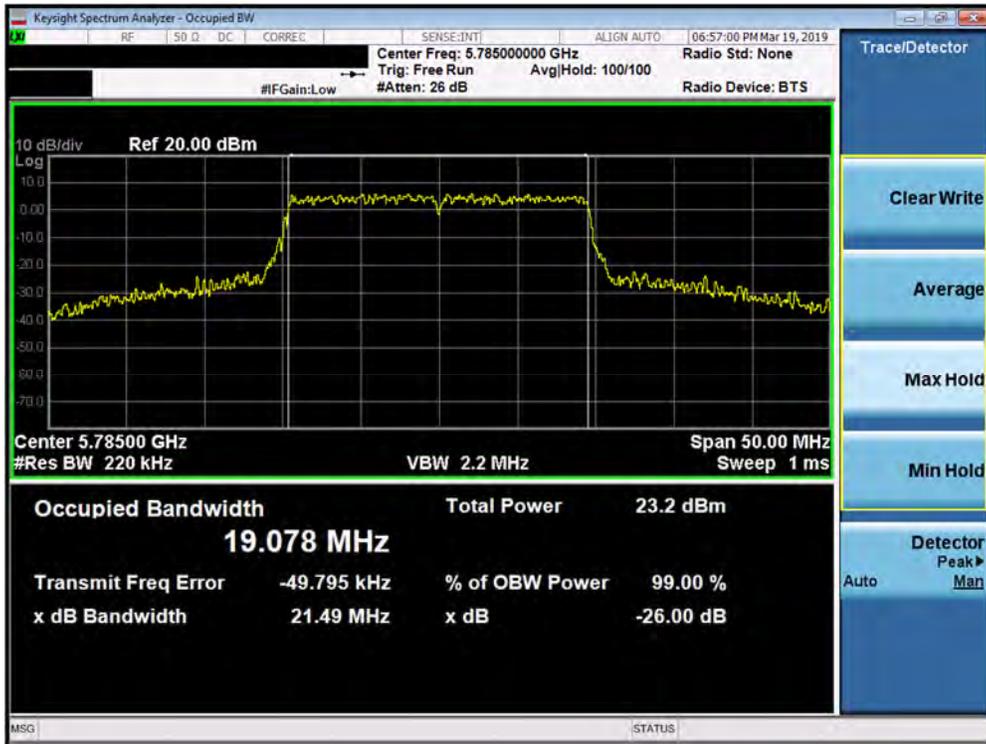


Plot 7-104. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: A3LSMF907N			<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset		Page 78 of 330	

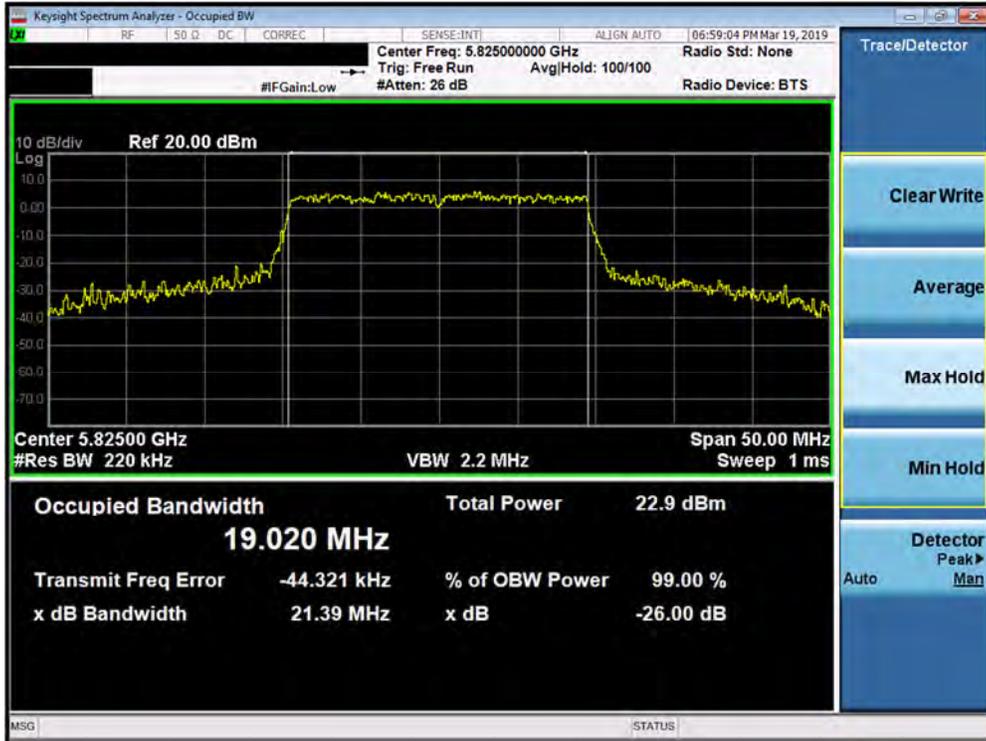


Plot 7-105. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 165)

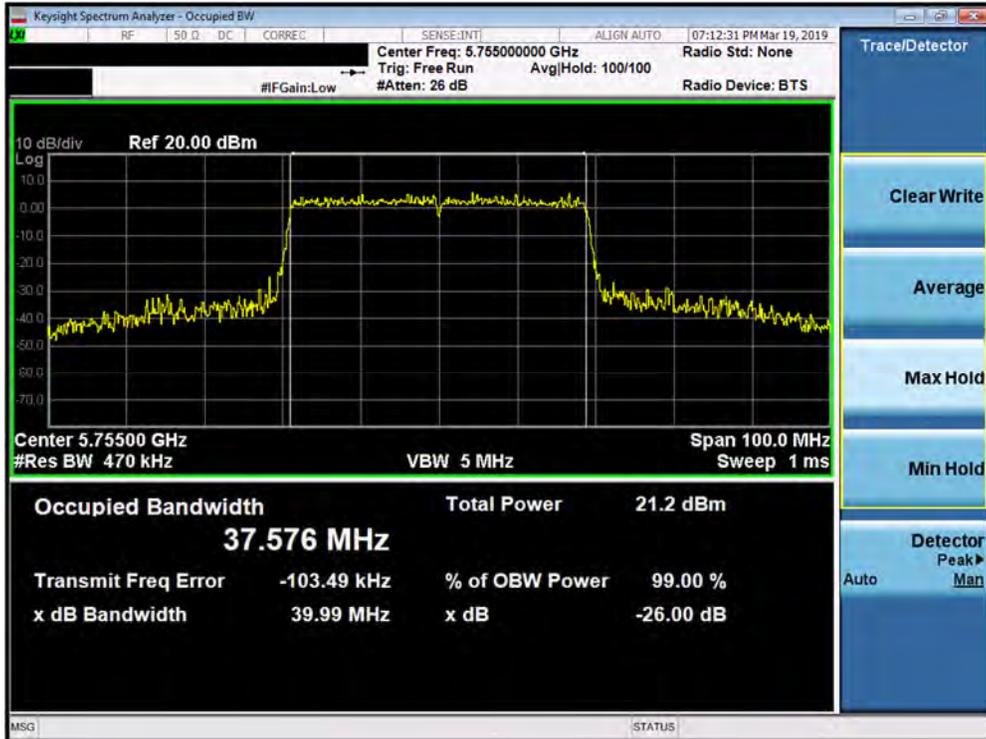


Plot 7-106. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 79 of 330

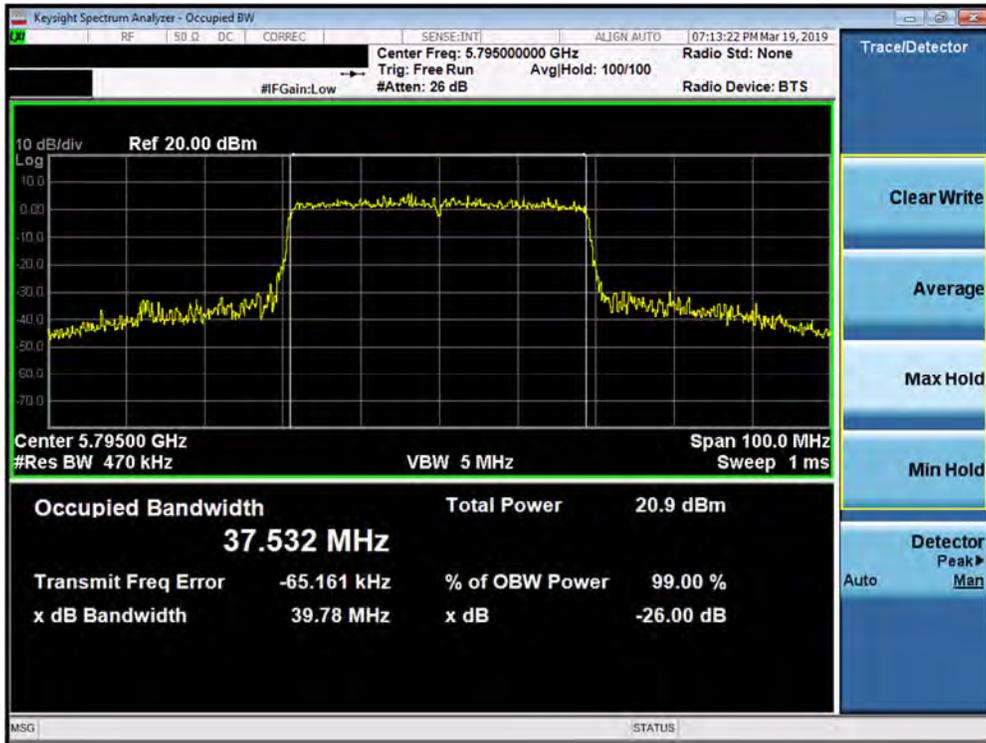

Plot 7-107. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 159)

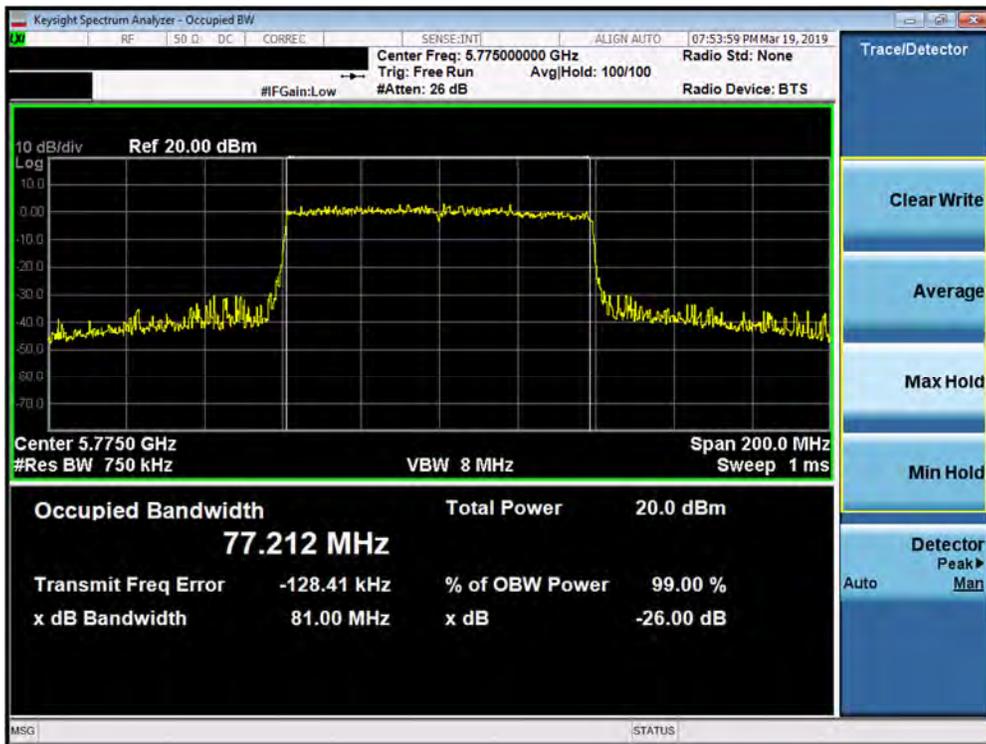

Plot 7-108. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)

FCC ID: A3LSMF907N	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 80 of 330

## 7.4 UNII Output Power Measurement – 802.11ax OFDMA

§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

### Test Overview and Limits

A transmitter antenna terminal of the EUT is connected to the input of an RF pulse power sensor. Measurement is made using a broadband average power meter while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies.

***In the 5.15 – 5.25GHz band, the maximum permissible conducted output power is 250mW (23.98dBm). The maximum e.i.r.p. shall not exceed the lesser of 200 mW (23.01dBm) or  $10 + 10 \log_{10}(18.97) = 22.78$  dBm.***

***In the 5.25 – 5.35GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or  $11 \text{ dBm} + 10 \log_{10}(26 \text{ dB BW}) = 11 \text{ dBm} + 10 \log_{10}(21.29) = 24.28 \text{ dBm}$ . The maximum e.i.r.p. shall not exceed the lesser of 1.0 W (30dBm) or  $17 + 10 \log_{10}(18.84) = 29.75$  dBm.***

***In the 5.47 – 5.725GHz band, the maximum permissible conducted output power is the lesser of 250mW (23.98dBm) or  $11 \text{ dBm} + 10 \log_{10}(26 \text{ dB BW}) = 11 \text{ dBm} + 10 \log_{10}(21.56) = 24.34 \text{ dBm}$ . The maximum e.i.r.p. shall not exceed the lesser of 1.0 W (30dBm) or  $17 + 10 \log_{10}(18.69) = 29.72$  dBm.***

***In the 5.725 – 5.850GHz band, the maximum permissible conducted output power is 1W (30dBm). The maximum e.i.r.p. is 36 dBm.***

### Test Procedure Used

ANSI C63.10-2013 – Section 12.3.3.2 Method PM-G  
 KDB 789033 D02 v02r01 – Section E)3)b) Method PM-G  
 ANSI C63.10-2013 – Section 14.2 Measure-and-Sum Technique  
 KDB 662911 v02r01 – Section E)1) Measure-and-Sum Technique

### Test Settings

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-3. Test Instrument & Measurement Setup**

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 81 of 330	

## SISO Antenna-1 Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	4	8						
					5180	36	AVG						
5200	40	AVG	26T	10.91	10.98	10.93	23.98	-13.00	-5.50	5.48	22.78	-17.30	
5240	48	AVG	26T	10.97	10.83	10.95	23.98	-13.01	-5.50	5.47	22.78	-17.31	
5260	52	AVG	26T	10.76	10.97	10.74	23.75	-12.78	-5.50	5.47	29.75	-24.28	
5280	56	AVG	26T	10.83	10.57	10.76	23.75	-12.92	-5.50	5.33	29.75	-24.42	
5320	64	AVG	26T	10.99	10.67	10.91	23.75	-12.76	-5.50	5.49	29.75	-24.26	
5500	100	AVG	26T	10.72	10.80	10.97	23.72	-12.75	-6.75	4.22	29.72	-25.50	
5600	120	AVG	26T	10.86	10.89	10.98	23.72	-12.74	-6.75	4.23	29.72	-25.49	
5720	144	AVG	26T	10.75	10.90	10.98	23.72	-12.74	-6.75	4.23	29.72	-25.49	
5745	149	AVG	26T	10.81	10.77	10.98	30.00	-19.02	-6.75	4.23	-	-	
5785	157	AVG	26T	10.56	10.94	10.99	30.00	-19.01	-6.75	4.24	-	-	
5825	165	AVG	26T	10.98	10.74	10.97	30.00	-19.02	-7.01	3.97	-	-	

Table 7-10. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	8	17						
					5190	38	AVG						
5230	46	AVG	26T	10.81	10.99	10.90	23.98	-12.99	-5.50	5.49	22.78	-17.29	
5270	54	AVG	26T	10.62	10.61	10.55	23.75	-13.13	-5.50	5.12	29.75	-24.63	
5310	62	AVG	26T	10.71	10.75	10.97	23.75	-12.78	-5.50	5.47	29.75	-24.28	
5510	102	AVG	26T	10.97	10.91	10.98	23.72	-12.74	-6.75	4.23	29.72	-25.49	
5590	118	AVG	26T	10.95	10.89	10.92	23.72	-12.77	-6.75	4.20	29.72	-25.52	
5710	142	AVG	26T	10.99	10.64	10.98	23.72	-12.73	-6.75	4.24	29.72	-25.48	
5755	151	AVG	26T	10.80	10.60	10.85	30.00	-19.15	-6.75	4.10	-	-	
5795	159	AVG	26T	10.65	10.65	10.66	30.00	-19.34	-6.75	3.91	-	-	

Table 7-11. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	18	36						
					5210	42	AVG						
5290	58	AVG	26T	10.51	10.99	10.98	23.75	-12.76	-5.50	5.49	29.75	-24.26	
5530	106	AVG	26T	10.75	10.72	10.56	23.72	-12.97	-6.75	4.00	29.72	-25.72	
5610	122	AVG	26T	10.97	10.75	10.60	23.72	-12.75	-6.75	4.22	29.72	-25.50	
5690	138	AVG	26T	10.98	10.96	10.52	23.72	-12.74	-6.75	4.23	29.72	-25.49	
5775	155	AVG	26T	10.90	10.94	10.80	30.00	-19.06	-6.75	4.19	-	-	

Table 7-12. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 82 of 330

## SISO Antenna-1 Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	39	40						
					5180	36	AVG						
5200	40	AVG	52T	12.98	12.73	12.99	23.98	-10.99	-5.50	7.49	22.78	-15.29	
5240	48	AVG	52T	12.76	12.93	12.79	23.98	-11.05	-5.50	7.43	22.78	-15.35	
5260	52	AVG	52T	12.75	12.92	12.79	23.75	-10.83	-5.50	7.42	29.75	-22.33	
5280	56	AVG	52T	12.87	12.96	12.90	23.75	-10.79	-5.50	7.46	29.75	-22.29	
5320	64	AVG	52T	12.93	12.98	12.89	23.75	-10.77	-5.50	7.48	29.75	-22.27	
5500	100	AVG	52T	12.89	12.72	12.77	23.72	-10.83	-6.75	6.14	29.72	-23.58	
5600	120	AVG	52T	12.99	12.63	12.95	23.72	-10.73	-6.75	6.24	29.72	-23.48	
5720	144	AVG	52T	12.97	12.74	12.95	23.72	-10.75	-6.75	6.22	29.72	-23.50	
5745	149	AVG	52T	12.81	12.87	12.92	30.00	-17.08	-6.75	6.17	-	-	
5785	157	AVG	52T	12.74	12.92	12.98	30.00	-17.02	-6.75	6.23	-	-	
5825	165	AVG	52T	12.95	12.98	12.87	30.00	-17.02	-7.01	5.97	-	-	

Table 7-13. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	40	44						
					5190	38	AVG						
5230	46	AVG	52T	11.66	11.97	11.68	23.98	-12.01	-5.50	6.47	22.78	-16.31	
5270	54	AVG	52T	11.86	11.65	11.74	23.75	-11.89	-5.50	6.36	29.75	-23.39	
5310	62	AVG	52T	11.83	11.77	11.72	23.75	-11.92	-5.50	6.33	29.75	-23.42	
5510	102	AVG	52T	11.72	11.98	11.65	23.72	-11.74	-6.75	5.23	29.72	-24.49	
5590	118	AVG	52T	11.71	11.94	11.98	23.72	-11.74	-6.75	5.23	29.72	-24.49	
5710	142	AVG	52T	11.81	11.61	11.76	23.72	-11.91	-6.75	5.06	29.72	-24.66	
5755	151	AVG	52T	11.98	11.80	11.90	30.00	-18.02	-6.75	5.23	-	-	
5795	159	AVG	52T	11.50	11.67	11.99	30.00	-18.01	-6.75	5.24	-	-	

Table 7-14. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	44	52						
					5210	42	AVG						
5290	58	AVG	52T	10.45	10.94	10.98	23.75	-12.77	-5.50	5.48	29.75	-24.27	
5530	106	AVG	52T	10.72	10.79	10.76	23.72	-12.93	-6.75	4.04	29.72	-25.68	
5610	122	AVG	52T	10.70	10.77	10.99	23.72	-12.73	-6.75	4.24	29.72	-25.48	
5690	138	AVG	52T	10.75	10.99	10.83	23.72	-12.73	-6.75	4.24	29.72	-25.48	
5775	155	AVG	52T	10.98	10.95	10.92	30.00	-19.02	-6.75	4.23	-	-	

Table 7-15. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 83 of 330	

### SISO Antenna-1 Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54						
					5180	36						
5200	40	AVG	106T	14.67	14.70	23.98	-9.28	-5.50	9.20	22.78	-13.58	
5240	48	AVG	106T	14.77	14.80	23.98	-9.18	-5.50	9.30	22.78	-13.48	
5260	52	AVG	106T	14.76	14.78	23.75	-8.97	-5.50	9.28	29.75	-20.47	
5280	56	AVG	106T	14.84	14.79	23.75	-8.91	-5.50	9.34	29.75	-20.41	
5320	64	AVG	106T	14.93	14.79	23.75	-8.82	-5.50	9.43	29.75	-20.32	
5500	100	AVG	106T	14.97	14.88	23.72	-8.75	-6.75	8.22	29.72	-21.50	
5600	120	AVG	106T	14.86	14.78	23.72	-8.86	-6.75	8.11	29.72	-21.61	
5720	144	AVG	106T	14.84	14.73	23.72	-8.88	-6.75	8.09	29.72	-21.63	
5745	149	AVG	106T	14.69	14.98	30.00	-15.02	-6.75	8.23	-	-	
5785	157	AVG	106T	14.94	14.97	30.00	-15.03	-6.75	8.22	-	-	
5825	165	AVG	106T	14.89	14.86	30.00	-15.11	-7.01	7.88	-	-	

Table 7-16. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54	56						
					5190	38	AVG						
5230	46	AVG	106T	12.99	12.56	12.96	23.98	-10.99	-5.50	7.49	22.78	-15.29	
5270	54	AVG	106T	12.59	12.63	12.98	23.75	-10.77	-5.50	7.48	29.75	-22.27	
5310	62	AVG	106T	12.98	12.67	12.96	23.75	-10.77	-5.50	7.48	29.75	-22.27	
5510	102	AVG	106T	12.74	12.88	12.76	23.72	-10.84	-6.75	6.13	29.72	-23.59	
5590	118	AVG	106T	12.91	12.80	12.86	23.72	-10.81	-6.75	6.16	29.72	-23.56	
5710	142	AVG	106T	12.96	12.98	12.95	23.72	-10.74	-6.75	6.23	29.72	-23.49	
5755	151	AVG	106T	12.80	12.72	12.75	30.00	-17.20	-6.75	6.05	-	-	
5795	159	AVG	106T	12.70	12.62	12.93	30.00	-17.07	-6.75	6.18	-	-	

Table 7-17. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	56	60						
					5210	42	AVG						
5290	58	AVG	106T	11.63	11.95	11.65	23.75	-11.80	-5.50	6.45	29.75	-23.30	
5530	106	AVG	106T	11.72	11.77	11.80	23.72	-11.92	-6.75	5.05	29.72	-24.67	
5610	122	AVG	106T	11.70	11.85	11.60	23.72	-11.87	-6.75	5.10	29.72	-24.62	
5690	138	AVG	106T	11.80	11.99	11.98	23.72	-11.73	-6.75	5.24	29.72	-24.48	
5775	155	AVG	106T	11.70	11.99	11.57	30.00	-18.01	-6.75	5.24	-	-	

Table 7-18. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 84 of 330		

## SISO Antenna-1 Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61					
	5180	36	AVG	242T	15.95	23.98	-8.03	-5.50	10.45	22.78	-12.33
	5200	40	AVG	242T	15.65	23.98	-8.33	-5.50	10.15	22.78	-12.63
	5240	48	AVG	242T	15.75	23.98	-8.23	-5.50	10.25	22.78	-12.53
	5260	52	AVG	242T	15.98	23.75	-7.77	-5.50	10.48	29.75	-19.27
	5280	56	AVG	242T	15.67	23.75	-8.08	-5.50	10.17	29.75	-19.58
	5320	64	AVG	242T	15.65	23.75	-8.10	-5.50	10.15	29.75	-19.60
	5500	100	AVG	242T	15.67	23.72	-8.05	-6.75	8.92	29.72	-20.80
	5600	120	AVG	242T	15.98	23.72	-7.74	-6.75	9.23	29.72	-20.49
	5720	144	AVG	242T	15.98	23.72	-7.74	-6.75	9.23	29.72	-20.49
	5745	149	AVG	242T	15.89	30.00	-14.11	-6.75	9.14	-	-
	5785	157	AVG	242T	15.87	30.00	-14.13	-6.75	9.12	-	-
	5825	165	AVG	242T	15.64	30.00	-14.36	-7.01	8.63	-	-

Table 7-19. SISO ANT1 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62					
	5190	38	AVG	242T	13.95	13.99	23.98	-9.99	-5.50	8.49	22.78	-14.29
	5230	46	AVG	242T	13.75	13.66	23.98	-10.23	-5.50	8.25	22.78	-14.53
	5270	54	AVG	242T	13.76	13.65	23.75	-9.99	-5.50	8.26	29.75	-21.49
	5310	62	AVG	242T	13.81	13.70	23.75	-9.94	-5.50	8.31	29.75	-21.44
	5510	102	AVG	242T	13.97	13.94	23.72	-9.75	-6.75	7.22	29.72	-22.50
	5590	118	AVG	242T	13.98	13.97	23.72	-9.74	-6.75	7.23	29.72	-22.49
	5710	142	AVG	242T	13.98	13.99	23.72	-9.73	-6.75	7.24	29.72	-22.48
	5755	151	AVG	242T	13.81	13.91	30.00	-16.09	-6.75	7.16	-	-
	5795	159	AVG	242T	13.98	13.61	30.00	-16.02	-6.75	7.23	-	-

Table 7-20. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62	64					
	5210	42	AVG	242T	12.93	12.99	12.98	23.98	-10.99	-5.50	7.49	22.78	-15.29
	5290	58	AVG	242T	12.94	12.54	12.92	23.75	-10.81	-5.50	7.44	29.75	-22.31
	5530	106	AVG	242T	12.72	12.88	12.99	23.72	-10.73	-6.75	6.24	29.72	-23.48
	5610	122	AVG	242T	12.81	12.95	12.91	23.72	-10.77	-6.75	6.20	29.72	-23.52
	5690	138	AVG	242T	12.99	12.98	12.71	23.72	-10.73	-6.75	6.24	29.72	-23.48
	5775	155	AVG	242T	12.94	12.91	12.87	30.00	-17.06	-6.75	6.19	-	-

Table 7-21. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 85 of 330	

## SISO Antenna-1 Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
						65						
	5190	38	AVG	484T	13.93	23.98	-10.05	-5.50	8.43	22.78	-14.35	
	5230	46	AVG	484T	13.98	23.98	-10.00	-5.50	8.48	22.78	-14.30	
	5270	54	AVG	484T	13.55	23.75	-10.20	-5.50	8.05	29.75	-21.70	
	5310	62	AVG	484T	13.97	23.75	-9.78	-5.50	8.47	29.75	-21.28	
	5510	102	AVG	484T	13.83	23.72	-9.89	-6.75	7.08	29.72	-22.64	
	5590	118	AVG	484T	13.74	23.72	-9.98	-6.75	6.99	29.72	-22.73	
	5710	142	AVG	484T	13.92	23.72	-9.80	-6.75	7.17	29.72	-22.55	
	5755	151	AVG	484T	13.60	30.00	-16.40	-6.75	6.85	-	-	
5795	159	AVG	484T	13.89	30.00	-16.11	-6.75	7.14	-	-		

Table 7-22. SISO ANT1 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						65	66					
	5210	42	AVG	484T	12.70	12.90	23.98	-11.08	-5.50	7.40	22.78	-15.38
5290	58	AVG	484T	12.72	12.86	23.75	-10.89	-5.50	7.36	29.75	-22.39	
5530	106	AVG	484T	12.95	12.92	23.72	-10.77	-6.75	6.20	29.72	-23.52	
5610	122	AVG	484T	12.72	12.75	23.72	-10.97	-6.75	6.00	29.72	-23.72	
5690	138	AVG	484T	12.80	12.93	23.72	-10.79	-6.75	6.18	29.72	-23.54	
5775	155	AVG	484T	12.98	12.99	30.00	-17.01	-6.75	6.24	-	-	

Table 7-23. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 86 of 330	

### SISO Antenna-1 Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						67					
	5210	42	AVG	996T	12.89	23.98	-11.09	-5.50	7.39	22.78	-15.39
	5290	58	AVG	996T	12.79	23.75	-10.96	-5.50	7.29	29.75	-22.46
	5530	106	AVG	996T	12.98	23.72	-10.74	-6.75	6.23	29.72	-23.49
	5610	122	AVG	996T	12.83	23.72	-10.89	-6.75	6.08	29.72	-23.64
	5690	138	AVG	996T	12.92	23.72	-10.80	-6.75	6.17	29.72	-23.55
	5775	155	AVG	996T	12.50	30.00	-17.50	-6.75	5.75	-	-

**Table 7-24. SISO ANT1 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)**

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 87 of 330	

## SISO Antenna-2 Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	4	8						
					5180	36	AVG						
5200	40	AVG	26T	10.77	10.98	10.70	23.98	-13.00	-6.05	4.93	22.78	-17.85	
5240	48	AVG	26T	10.85	10.99	10.80	23.98	-12.99	-6.05	4.94	22.78	-17.84	
5260	52	AVG	26T	10.99	10.76	10.91	23.75	-12.76	-6.05	4.94	29.75	-24.81	
5280	56	AVG	26T	10.99	10.78	10.91	23.75	-12.76	-6.05	4.94	29.75	-24.81	
5320	64	AVG	26T	10.81	10.96	10.79	23.75	-12.79	-6.05	4.91	29.75	-24.84	
5500	100	AVG	26T	10.94	10.98	10.66	23.72	-12.74	-7.34	3.64	29.72	-26.08	
5600	120	AVG	26T	10.89	10.99	10.53	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5720	144	AVG	26T	10.99	10.44	10.75	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5745	149	AVG	26T	10.97	10.99	10.96	30.00	-19.01	-7.34	3.65	-	-	
5785	157	AVG	26T	10.89	10.68	10.75	30.00	-19.11	-7.34	3.55	-	-	
5825	165	AVG	26T	10.78	10.51	10.82	30.00	-19.18	-6.02	4.80	-	-	

Table 7-25. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	8	17						
					5190	38	AVG						
5230	46	AVG	26T	10.79	10.83	10.70	23.98	-13.15	-6.05	4.78	22.78	-18.00	
5270	54	AVG	26T	10.98	10.95	10.99	23.75	-12.76	-6.05	4.94	29.75	-24.81	
5310	62	AVG	26T	10.65	10.96	10.96	23.75	-12.79	-6.05	4.91	29.75	-24.84	
5510	102	AVG	26T	10.98	10.61	10.87	23.72	-12.74	-7.34	3.64	29.72	-26.08	
5590	118	AVG	26T	10.96	10.67	10.83	23.72	-12.76	-7.34	3.62	29.72	-26.10	
5710	142	AVG	26T	10.80	10.99	10.96	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5755	151	AVG	26T	10.88	10.99	10.81	30.00	-19.01	-7.34	3.65	-	-	
5795	159	AVG	26T	10.80	10.55	10.69	30.00	-19.20	-7.34	3.46	-	-	

Table 7-26. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0	18	36						
					5210	42	AVG						
5290	58	AVG	26T	10.91	10.96	10.91	23.75	-12.79	-6.05	4.91	29.75	-24.84	
5530	106	AVG	26T	10.92	10.63	10.96	23.72	-12.76	-7.34	3.62	29.72	-26.10	
5610	122	AVG	26T	10.99	10.81	10.73	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5690	138	AVG	26T	10.85	10.89	10.82	23.72	-12.83	-7.34	3.55	29.72	-26.17	
5775	155	AVG	26T	10.78	10.97	10.71	30.00	-19.03	-7.34	3.63	-	-	

Table 7-27. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 88 of 330	

## SISO Antenna-2 Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	39	40						
					5180	36	AVG						
5200	40	AVG	52T	12.81	12.99	12.82	23.98	-10.99	-6.05	6.94	22.78	-15.84	
5240	48	AVG	52T	12.90	12.93	12.72	23.98	-11.05	-6.05	6.88	22.78	-15.90	
5260	52	AVG	52T	12.97	12.72	12.50	23.75	-10.78	-6.05	6.92	29.75	-22.83	
5280	56	AVG	52T	12.99	12.74	12.98	23.75	-10.76	-6.05	6.94	29.75	-22.81	
5320	64	AVG	52T	12.85	12.92	12.71	23.75	-10.83	-6.05	6.87	29.75	-22.88	
5500	100	AVG	52T	12.96	12.62	12.67	23.72	-10.76	-7.34	5.62	29.72	-24.10	
5600	120	AVG	52T	12.99	12.55	12.63	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5720	144	AVG	52T	12.99	12.98	12.81	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5745	149	AVG	52T	12.54	12.75	12.91	30.00	-17.09	-7.34	5.57	-	-	
5785	157	AVG	52T	12.76	12.91	12.55	30.00	-17.09	-7.34	5.57	-	-	
5825	165	AVG	52T	12.73	12.91	12.63	30.00	-17.09	-6.02	6.89	-	-	

Table 7-28. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	40	44						
					5190	38	AVG						
5230	46	AVG	52T	11.90	11.78	11.96	23.98	-12.02	-6.05	5.91	22.78	-16.87	
5270	54	AVG	52T	11.60	11.98	11.62	23.75	-11.77	-6.05	5.93	29.75	-23.82	
5310	62	AVG	52T	11.86	11.98	11.62	23.75	-11.77	-6.05	5.93	29.75	-23.82	
5510	102	AVG	52T	11.50	11.74	11.54	23.72	-11.98	-7.34	4.40	29.72	-25.32	
5590	118	AVG	52T	11.75	11.84	11.60	23.72	-11.88	-7.34	4.50	29.72	-25.22	
5710	142	AVG	52T	11.86	11.99	11.72	23.72	-11.73	-7.34	4.65	29.72	-25.07	
5755	151	AVG	52T	11.96	11.73	11.85	30.00	-18.04	-7.34	4.62	-	-	
5795	159	AVG	52T	11.99	11.72	11.96	30.00	-18.01	-7.34	4.65	-	-	

Table 7-29. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37	44	52						
					5210	42	AVG						
5290	58	AVG	52T	10.65	10.98	10.67	23.75	-12.77	-6.05	4.93	29.75	-24.82	
5530	106	AVG	52T	10.60	10.87	10.62	23.72	-12.85	-7.34	3.53	29.72	-26.19	
5610	122	AVG	52T	10.85	10.90	10.99	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5690	138	AVG	52T	10.95	10.99	10.57	23.72	-12.73	-7.34	3.65	29.72	-26.07	
5775	155	AVG	52T	10.90	10.66	10.73	30.00	-19.10	-7.34	3.56	-	-	

Table 7-30. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMF907N			<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset		Page 89 of 330	

## SISO Antenna-2 Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54						
					5180	36						
5200	40	AVG	106T	14.87	14.79	23.98	-9.11	-6.05	8.82	22.78	-13.96	
5240	48	AVG	106T	14.80	14.73	23.98	-9.18	-6.05	8.75	22.78	-14.03	
5260	52	AVG	106T	14.61	14.46	23.75	-9.14	-6.05	8.56	29.75	-21.19	
5280	56	AVG	106T	14.97	14.98	23.75	-8.77	-6.05	8.93	29.75	-20.82	
5320	64	AVG	106T	14.83	14.82	23.75	-8.92	-6.05	8.78	29.75	-20.97	
5500	100	AVG	106T	14.96	14.87	23.72	-8.76	-7.34	7.62	29.72	-22.10	
5600	120	AVG	106T	14.93	14.75	23.72	-8.79	-7.34	7.59	29.72	-22.13	
5720	144	AVG	106T	14.97	14.80	23.72	-8.75	-7.34	7.63	29.72	-22.09	
5745	149	AVG	106T	14.99	14.91	30.00	-15.01	-7.34	7.65	-	-	
5785	157	AVG	106T	14.93	14.99	30.00	-15.01	-7.34	7.65	-	-	
5825	165	AVG	106T	14.99	14.99	30.00	-15.01	-6.02	8.97	-	-	

Table 7-31. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	54	56						
					5190	38	AVG						
5230	46	AVG	106T	12.78	12.80	12.67	23.98	-11.18	-6.05	6.75	22.78	-16.03	
5270	54	AVG	106T	12.98	12.97	12.93	23.75	-10.77	-6.05	6.93	29.75	-22.82	
5310	62	AVG	106T	12.50	12.99	12.97	23.75	-10.76	-6.05	6.94	29.75	-22.81	
5510	102	AVG	106T	12.89	12.80	12.99	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5590	118	AVG	106T	12.99	12.88	12.98	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5710	142	AVG	106T	12.67	12.98	12.98	23.72	-10.74	-7.34	5.64	29.72	-24.08	
5755	151	AVG	106T	12.98	12.99	12.87	30.00	-17.01	-7.34	5.65	-	-	
5795	159	AVG	106T	12.73	12.99	12.71	30.00	-17.01	-7.34	5.65	-	-	

Table 7-32. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53	56	60						
					5210	42	AVG						
5290	58	AVG	106T	11.71	11.99	11.70	23.75	-11.76	-6.05	5.94	29.75	-23.81	
5530	106	AVG	106T	11.67	11.94	11.72	23.72	-11.78	-7.34	4.60	29.72	-25.12	
5610	122	AVG	106T	11.78	11.99	11.78	23.72	-11.73	-7.34	4.65	29.72	-25.07	
5690	138	AVG	106T	11.99	11.97	11.71	23.72	-11.73	-7.34	4.65	29.72	-25.07	
5775	155	AVG	106T	11.94	11.70	11.91	30.00	-18.06	-7.34	4.60	-	-	

Table 7-33. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 90 of 330		

## SISO Antenna-2 Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61					
	5180	36	AVG	242T	15.85	23.98	-8.13	-6.05	9.80	22.78	-12.98
	5200	40	AVG	242T	15.88	23.98	-8.10	-6.05	9.83	22.78	-12.95
	5240	48	AVG	242T	15.83	23.98	-8.15	-6.05	9.78	22.78	-13.00
	5260	52	AVG	242T	15.52	23.75	-8.23	-6.05	9.47	29.75	-20.28
	5280	56	AVG	242T	15.62	23.75	-8.13	-6.05	9.57	29.75	-20.18
	5320	64	AVG	242T	15.88	23.75	-7.87	-6.05	9.83	29.75	-19.92
	5500	100	AVG	242T	15.99	23.72	-7.73	-7.34	8.65	29.72	-21.07
	5600	120	AVG	242T	15.94	23.72	-7.78	-7.34	8.60	29.72	-21.12
	5720	144	AVG	242T	15.85	23.72	-7.87	-7.34	8.51	29.72	-21.21
	5745	149	AVG	242T	15.99	30.00	-14.01	-7.34	8.65	-	-
	5785	157	AVG	242T	15.99	30.00	-14.01	-7.34	8.65	-	-
	5825	165	AVG	242T	15.97	30.00	-14.03	-6.02	9.95	-	-

Table 7-34. SISO ANT2 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62					
	5190	38	AVG	242T	13.94	13.62	23.98	-10.04	-6.05	7.89	22.78	-14.89
	5230	46	AVG	242T	13.90	13.84	23.98	-10.08	-6.05	7.85	22.78	-14.93
	5270	54	AVG	242T	13.72	13.70	23.75	-10.03	-6.05	7.67	29.75	-22.08
	5310	62	AVG	242T	13.82	13.66	23.75	-9.93	-6.05	7.77	29.75	-21.98
	5510	102	AVG	242T	13.99	13.68	23.72	-9.73	-7.34	6.65	29.72	-23.07
	5590	118	AVG	242T	13.62	13.73	23.72	-9.99	-7.34	6.39	29.72	-23.33
	5710	142	AVG	242T	13.87	13.82	23.72	-9.85	-7.34	6.53	29.72	-23.19
	5755	151	AVG	242T	13.87	13.99	30.00	-16.01	-7.34	6.65	-	-
	5795	159	AVG	242T	13.67	13.78	30.00	-16.22	-7.34	6.44	-	-

Table 7-35. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						61	62	64					
	5210	42	AVG	242T	12.93	12.99	12.91	23.98	-10.99	-6.05	6.94	22.78	-15.84
	5290	58	AVG	242T	12.95	12.79	12.67	23.75	-10.80	-6.05	6.90	29.75	-22.85
	5530	106	AVG	242T	12.99	12.98	12.63	23.72	-10.73	-7.34	5.65	29.72	-24.07
	5610	122	AVG	242T	12.99	12.62	12.52	23.72	-10.73	-7.34	5.65	29.72	-24.07
	5690	138	AVG	242T	12.79	12.72	12.61	23.72	-10.93	-7.34	5.45	29.72	-24.27
	5775	155	AVG	242T	12.99	12.99	12.82	30.00	-17.01	-7.34	5.65	-	-

Table 7-36. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 91 of 330	

### SISO Antenna-2 Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]	
						65						
	5190	38	AVG	484T	13.85	23.98	-10.13	-6.05	7.80	22.78	-14.98	
	5230	46	AVG	484T	13.92	23.98	-10.06	-6.05	7.87	22.78	-14.91	
	5270	54	AVG	484T	13.68	23.75	-10.07	-6.05	7.63	29.75	-22.12	
	5310	62	AVG	484T	13.72	23.75	-10.03	-6.05	7.67	29.75	-22.08	
	5510	102	AVG	484T	13.95	23.72	-9.77	-7.34	6.61	29.72	-23.11	
	5590	118	AVG	484T	13.99	23.72	-9.73	-7.34	6.65	29.72	-23.07	
	5710	142	AVG	484T	13.70	23.72	-10.02	-7.34	6.36	29.72	-23.36	
	5755	151	AVG	484T	13.99	30.00	-16.01	-7.34	6.65	-	-	
5795	159	AVG	484T	13.99	30.00	-16.01	-7.34	6.65	-	-		

Table 7-37. SISO ANT2 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index		Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65	66						
	5210	42	AVG	484T	12.73	12.87	23.98	-11.11	-6.05	6.82	22.78	-15.96
5290	58	AVG	484T	12.91	12.98	23.75	-10.77	-6.05	6.93	29.75	-22.82	
5530	106	AVG	484T	12.80	12.98	23.72	-10.74	-7.34	5.64	29.72	-24.08	
5610	122	AVG	484T	12.95	12.99	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5690	138	AVG	484T	12.93	12.99	23.72	-10.73	-7.34	5.65	29.72	-24.07	
5775	155	AVG	484T	12.99	12.66	30.00	-17.01	-7.34	5.65	-	-	

Table 7-38. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 92 of 330	

### SISO Antenna-2 Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index	Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
						67					
	5210	42	AVG	996T	12.71	23.98	-11.27	-6.05	6.66	22.78	-16.12
	5290	58	AVG	996T	12.53	23.75	-11.22	-6.05	6.48	29.75	-23.27
	5530	106	AVG	996T	12.93	23.72	-10.79	-7.34	5.59	29.72	-24.13
	5610	122	AVG	996T	12.93	23.72	-10.79	-7.34	5.59	29.72	-24.13
	5690	138	AVG	996T	12.97	23.72	-10.75	-7.34	5.63	29.72	-24.09
	5775	155	AVG	996T	12.99	30.00	-17.01	-7.34	5.65	-	-

**Table 7-39. SISO ANT2 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)**

FCC ID: A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 93 of 330	

## MIMO Maximum Conducted Output Power Measurements (26 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			4			8								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	26T	7.78	8.18	10.99	7.55	7.81	10.69	7.42	7.62	10.53	23.98	-12.99	-2.89	8.11	22.78	-14.67	
5200	40	AVG	26T	7.55	7.87	10.72	7.62	7.87	10.76	7.57	7.62	10.61	23.98	-13.22	-2.89	7.87	22.78	-14.91	
5240	48	AVG	26T	7.26	7.88	10.59	7.61	7.77	10.70	7.31	7.72	10.53	23.98	-13.28	-2.89	7.82	22.78	-14.96	
5260	52	AVG	26T	7.67	8.01	10.85	7.50	7.63	10.58	7.69	7.95	10.83	23.75	-12.90	-2.89	7.97	29.75	-21.78	
5280	56	AVG	26T	7.88	7.94	10.92	7.70	7.66	10.69	7.90	7.89	10.91	23.75	-12.83	-2.89	8.04	29.75	-21.71	
5320	64	AVG	26T	7.75	7.89	10.83	7.66	7.62	10.65	7.90	7.88	10.90	23.75	-12.85	-2.89	8.01	29.75	-21.74	
5500	100	AVG	26T	7.33	8.55	10.99	7.04	8.18	10.66	7.19	8.38	10.84	23.72	-12.73	-3.52	7.47	29.72	-22.25	
5600	120	AVG	26T	7.20	8.58	10.95	6.85	8.23	10.60	7.05	8.27	10.71	23.72	-12.77	-3.52	7.43	29.72	-22.29	
5720	144	AVG	26T	7.15	8.68	10.99	6.77	8.51	10.74	6.95	8.50	10.80	23.72	-12.73	-3.52	7.47	29.72	-22.25	
5745	149	AVG	26T	6.05	9.11	10.85	6.15	9.20	10.95	5.79	8.75	10.53	30.00	-19.05	-3.52	7.43	-	-	
5785	157	AVG	26T	6.05	9.04	10.81	6.19	9.14	10.92	5.77	8.76	10.53	30.00	-19.08	-3.52	7.40	-	-	
5825	165	AVG	26T	5.93	8.85	10.64	6.30	9.16	10.97	6.35	9.16	10.99	30.00	-19.01	-3.25	7.74	-	-	

Table 7-40. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			8			17								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	26T	7.71	8.21	10.98	7.79	8.17	10.99	7.20	7.81	10.53	23.98	-12.99	-2.89	8.11	22.78	-14.67	
5230	46	AVG	26T	7.68	8.16	10.94	7.81	7.92	10.88	7.74	8.21	10.99	23.98	-12.99	-2.89	8.11	22.78	-14.67	
5270	54	AVG	26T	7.77	7.67	10.73	7.76	7.58	10.68	7.61	7.70	10.67	23.75	-13.02	-2.89	7.85	29.75	-21.90	
5310	62	AVG	26T	7.50	8.00	10.77	7.45	7.86	10.67	7.32	7.70	10.52	23.75	-12.98	-2.89	7.88	29.75	-21.87	
5510	102	AVG	26T	6.83	8.44	10.72	6.92	8.18	10.61	6.81	8.23	10.59	23.72	-13.00	-3.52	7.20	29.72	-22.52	
5590	118	AVG	26T	6.71	8.39	10.64	7.23	8.61	10.98	6.67	8.36	10.61	23.72	-12.74	-3.52	7.46	29.72	-22.26	
5710	142	AVG	26T	6.85	8.47	10.75	6.72	8.31	10.60	6.75	8.26	10.58	23.72	-12.97	-3.52	7.23	29.72	-22.49	
5755	151	AVG	26T	5.96	8.77	10.60	6.39	9.08	10.95	5.72	8.73	10.49	30.00	-19.05	-3.52	7.43	-	-	
5795	159	AVG	26T	5.90	8.99	10.72	6.80	9.92	11.64	6.00	8.84	10.66	30.00	-18.36	-3.52	8.12	-	-	

Table 7-41. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					0			18			36								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	26T	7.72	8.21	10.98	7.25	7.86	10.58	7.62	8.21	10.94	23.98	-13.00	-2.89	8.10	22.78	-14.68	
5290	58	AVG	26T	7.62	7.55	10.60	7.66	7.76	10.72	7.58	7.63	10.62	23.75	-13.03	-2.89	7.84	29.75	-21.91	
5530	106	AVG	26T	7.30	8.20	10.78	7.00	8.42	10.78	6.75	8.15	10.52	23.72	-12.94	-3.52	7.26	29.72	-22.46	
5610	122	AVG	26T	6.76	8.22	10.56	6.85	8.25	10.62	6.75	8.19	10.54	23.72	-13.10	-3.52	7.10	29.72	-22.62	
5690	138	AVG	26T	7.00	8.30	10.71	6.92	8.42	10.74	6.76	8.25	10.58	23.72	-12.98	-3.52	7.22	29.72	-22.50	
5775	155	AVG	26T	5.95	8.80	10.62	6.00	9.03	10.78	6.07	8.79	10.65	30.00	-19.22	-3.52	7.26	-	-	

Table 7-42. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (26 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 94 of 330	

## MIMO Conducted Output Power Measurements (52 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			39			40								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	52T	9.55	9.67	12.62	9.56	9.85	12.72	9.50	9.67	12.60	23.98	-11.26	-2.89	9.83	22.78	-12.95	
5200	40	AVG	52T	9.37	9.76	12.58	9.55	9.94	12.76	9.40	9.64	12.53	23.98	-11.22	-2.89	9.87	22.78	-12.91	
5240	48	AVG	52T	9.30	9.92	12.63	9.47	9.97	12.74	9.44	9.84	12.65	23.98	-11.24	-2.89	9.85	22.78	-12.93	
5260	52	AVG	52T	9.90	10.05	12.99	9.50	9.60	12.56	9.95	9.98	12.98	23.75	-10.76	-2.89	10.10	29.75	-19.65	
5280	56	AVG	52T	9.90	10.05	12.99	9.59	9.75	12.68	9.99	9.59	12.50	23.75	-10.76	-2.89	10.10	29.75	-19.65	
5320	64	AVG	52T	9.99	9.97	12.99	9.48	9.62	12.56	9.33	9.61	12.48	23.75	-10.76	-2.89	10.10	29.75	-19.65	
5500	100	AVG	52T	8.81	10.13	12.53	8.65	10.23	12.52	8.77	10.45	12.70	23.72	-11.02	-3.52	9.18	29.72	-20.54	
5600	120	AVG	52T	9.04	10.64	12.92	8.60	10.22	12.50	8.92	10.42	12.74	23.72	-10.80	-3.52	9.40	29.72	-20.32	
5720	144	AVG	52T	8.98	10.80	12.99	8.57	10.53	12.67	9.10	10.55	12.90	23.72	-10.73	-3.52	9.47	29.72	-20.25	
5745	149	AVG	52T	8.01	11.08	12.82	8.10	11.13	12.88	8.22	11.23	12.99	30.00	-17.01	-3.52	9.47	-	-	
5785	157	AVG	52T	7.99	11.03	12.78	8.20	11.09	12.89	8.15	11.27	12.99	30.00	-17.01	-3.52	9.47	-	-	
5825	165	AVG	52T	7.82	10.83	12.59	8.07	11.09	12.85	7.80	10.73	12.52	30.00	-17.15	-3.25	9.60	-	-	

Table 7-43. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			40			44								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	52T	8.45	8.93	11.71	8.35	8.80	11.59	8.47	8.97	11.74	23.98	-12.24	-2.89	8.85	22.78	-13.93	
5230	46	AVG	52T	8.51	8.74	11.64	8.36	8.57	11.48	8.55	8.99	11.79	23.98	-12.19	-2.89	8.90	22.78	-13.88	
5270	54	AVG	52T	8.97	8.99	11.99	8.77	8.66	11.73	8.87	8.92	11.91	23.75	-11.76	-2.89	9.10	29.75	-20.65	
5310	62	AVG	52T	8.71	9.16	11.95	8.41	8.81	11.62	8.71	9.02	11.88	23.75	-11.80	-2.89	9.07	29.75	-20.68	
5610	102	AVG	52T	8.07	9.73	11.99	8.10	9.58	11.91	7.72	9.68	11.82	23.72	-11.73	-3.52	8.47	29.72	-21.25	
5690	118	AVG	52T	7.93	9.66	11.89	8.01	9.73	11.96	7.79	9.73	11.88	23.72	-11.76	-3.52	8.44	29.72	-21.28	
5710	142	AVG	52T	8.03	9.76	11.99	7.83	9.23	11.60	7.95	9.69	11.92	23.72	-11.73	-3.52	8.47	29.72	-21.25	
5755	151	AVG	52T	7.01	9.93	11.72	7.31	10.14	11.96	7.01	9.85	11.67	30.00	-18.04	-3.52	8.44	-	-	
5795	159	AVG	52T	7.07	10.15	11.89	6.82	9.91	11.64	7.11	10.05	11.83	30.00	-18.11	-3.52	8.37	-	-	

Table 7-44. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dB]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					37			44			52								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	52T	7.41	7.72	10.58	7.71	8.12	10.93	7.37	7.75	10.57	23.98	-13.05	-2.89	8.04	22.78	-14.74	
5290	58	AVG	52T	7.78	7.63	10.72	7.75	7.64	10.71	7.60	7.72	10.67	23.75	-13.03	-2.89	7.83	29.75	-21.92	
5530	106	AVG	52T	7.40	8.45	10.97	7.70	8.25	10.99	6.92	8.50	10.79	23.72	-12.73	-3.52	7.47	29.72	-22.25	
5610	122	AVG	52T	6.95	8.47	10.79	6.78	8.33	10.63	6.88	8.42	10.73	23.72	-12.93	-3.52	7.27	29.72	-22.45	
5690	138	AVG	52T	7.17	8.43	10.86	7.31	8.52	10.97	6.95	8.45	10.77	23.72	-12.75	-3.52	7.45	29.72	-22.27	
5775	155	AVG	52T	6.10	8.90	10.73	5.88	8.57	10.44	6.08	8.86	10.70	30.00	-19.27	-3.52	7.21	-	-	

Table 7-45. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (52 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 95 of 330

## MIMO Conducted Output Power Measurements (106 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			54								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5180	36	AVG	106T	11.37	11.77	14.58	11.52	11.84	14.69	23.98	-9.29	-2.89	11.81	22.78	-10.97	
5200	40	AVG	106T	11.31	12.04	14.70	11.40	11.98	14.71	23.98	-9.27	-2.89	11.82	22.78	-10.96	
5240	48	AVG	106T	11.33	12.15	14.77	11.35	12.06	14.73	23.98	-9.21	-2.89	11.88	22.78	-10.90	
5260	52	AVG	106T	11.75	12.17	14.98	11.32	11.64	14.49	23.75	-8.77	-2.89	12.09	29.75	-17.66	
5280	56	AVG	106T	11.52	11.77	14.66	11.55	11.79	14.68	23.75	-9.07	-2.89	11.80	29.75	-17.95	
5320	64	AVG	106T	11.40	11.72	14.57	11.23	11.75	14.51	23.75	-9.18	-2.89	11.69	29.75	-18.06	
5500	100	AVG	106T	11.05	12.72	14.98	10.91	12.69	14.90	23.72	-8.74	-3.52	11.46	29.72	-18.26	
5600	120	AVG	106T	10.81	12.68	14.86	10.82	12.55	14.78	23.72	-8.86	-3.52	11.34	29.72	-18.38	
5720	144	AVG	106T	10.51	12.42	14.58	10.91	12.77	14.95	23.72	-8.77	-3.52	11.43	29.72	-18.29	
5745	149	AVG	106T	9.94	12.93	14.70	10.35	13.15	14.98	30.00	-15.02	-3.52	11.46	-	-	
5785	157	AVG	106T	9.88	12.84	14.62	10.34	13.17	14.99	30.00	-15.01	-3.52	11.47	-	-	
5825	165	AVG	106T	10.20	13.10	14.90	10.36	13.02	14.90	30.00	-15.10	-3.25	11.65	-	-	

Table 7-46. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			54			56								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	106T	9.73	10.21	12.99	9.82	10.13	12.99	9.25	9.75	12.52	23.98	-10.99	-2.89	10.10	22.78	-12.68	
5230	46	AVG	106T	9.70	10.20	12.97	9.90	9.97	12.95	9.63	10.25	12.96	23.98	-11.01	-2.89	10.08	22.78	-12.70	
5270	54	AVG	106T	9.87	9.90	12.90	9.76	9.72	12.75	9.61	9.80	12.72	23.75	-10.85	-2.89	10.01	29.75	-19.74	
5310	62	AVG	106T	9.61	10.03	12.84	9.63	9.84	12.75	9.46	9.76	12.62	23.75	-10.91	-2.89	9.95	29.75	-19.80	
5510	102	AVG	106T	8.78	10.41	12.68	8.76	10.27	12.59	9.00	10.49	12.82	23.72	-10.90	-3.52	9.30	29.72	-20.42	
5590	118	AVG	106T	8.75	10.39	12.66	9.12	10.70	12.99	8.65	10.50	12.68	23.72	-10.73	-3.52	9.47	29.72	-20.25	
5710	142	AVG	106T	8.95	10.46	12.78	8.76	10.38	12.66	8.85	10.36	12.68	23.72	-10.94	-3.52	9.26	29.72	-20.46	
5755	151	AVG	106T	8.22	11.06	12.88	8.28	11.09	12.92	8.25	11.20	12.98	30.00	-17.02	-3.52	9.46	-	-	
5795	159	AVG	106T	7.80	11.03	12.72	8.21	11.19	12.96	7.89	10.88	12.65	30.00	-17.04	-3.52	9.44	-	-	

Table 7-47. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					53			56			60								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	106T	8.70	8.87	11.80	8.35	8.86	11.62	8.55	9.09	11.84	23.98	-12.14	-2.89	8.95	22.78	-13.83	
5290	58	AVG	106T	8.50	8.72	11.62	8.80	8.92	11.87	8.85	9.05	11.96	23.75	-11.79	-2.89	9.08	29.75	-20.67	
5530	106	AVG	106T	8.06	9.20	11.68	8.08	9.45	11.83	8.05	9.68	11.95	23.72	-11.77	-3.52	8.43	29.72	-21.29	
5610	122	AVG	106T	8.05	9.70	11.96	7.83	9.35	11.67	8.04	9.70	11.96	23.72	-11.76	-3.52	8.44	29.72	-21.28	
5690	138	AVG	106T	7.80	9.23	11.58	7.95	9.35	11.72	8.10	9.63	11.94	23.72	-11.78	-3.52	8.42	29.72	-21.30	
5775	155	AVG	106T	7.08	9.99	11.78	7.40	10.14	11.99	7.29	10.00	11.86	30.00	-18.01	-3.52	8.47	-	-	

Table 7-48. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (106 Tones)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset			Page 96 of 330

## MIMO Conducted Output Power Measurements (242 Tones)

5GHz (20MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61								
					ANT1	ANT2	MIMO						
5180	36	AVG	242T	12.35	12.93	15.66	23.98	-8.32	-2.89	12.77	22.78	-10.01	
5200	40	AVG	242T	12.41	12.86	15.65	23.98	-8.33	-2.89	12.77	22.78	-10.01	
5240	48	AVG	242T	12.30	13.04	15.70	23.98	-8.28	-2.89	12.81	22.78	-9.97	
5260	52	AVG	242T	12.80	13.15	15.99	23.75	-7.76	-2.89	13.10	29.75	-16.65	
5280	56	AVG	242T	12.32	12.73	15.54	23.75	-8.21	-2.89	12.65	29.75	-17.10	
5320	64	AVG	242T	12.36	12.67	15.53	23.75	-8.22	-2.89	12.64	29.75	-17.11	
5500	100	AVG	242T	11.96	13.66	15.90	23.72	-7.82	-3.52	12.38	29.72	-17.34	
5600	120	AVG	242T	11.73	13.69	15.83	23.72	-7.89	-3.52	12.31	29.72	-17.41	
5720	144	AVG	242T	11.75	13.72	15.86	23.72	-7.86	-3.52	12.34	29.72	-17.38	
5745	149	AVG	242T	11.23	14.23	15.99	30.00	-14.01	-3.52	12.47	-	-	
5785	157	AVG	242T	10.83	13.71	15.51	30.00	-14.49	-3.52	11.99	-	-	
5825	165	AVG	242T	11.21	14.13	15.92	30.00	-14.08	-3.25	12.67	-	-	

Table 7-49. MIMO 20MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61			62								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5190	38	AVG	242T	10.65	10.85	13.76	10.31	11.04	13.70	23.98	-10.22	-2.89	10.88	22.78	-11.90	
5230	46	AVG	242T	10.55	10.83	13.70	10.44	11.04	13.76	23.98	-10.22	-2.89	10.88	22.78	-11.90	
5270	54	AVG	242T	10.97	10.99	13.99	10.72	11.18	13.97	23.75	-9.76	-2.89	11.10	29.75	-18.65	
5310	62	AVG	242T	10.20	10.68	13.46	10.20	10.71	13.47	23.75	-10.28	-2.89	10.59	29.75	-19.16	
5510	102	AVG	242T	9.66	11.25	13.54	9.81	11.37	13.67	23.72	-10.05	-3.52	10.15	29.72	-19.57	
5590	118	AVG	242T	9.76	11.61	13.79	9.76	11.80	13.91	23.72	-9.81	-3.52	10.39	29.72	-19.33	
5710	142	AVG	242T	9.84	11.66	13.85	9.97	11.80	13.99	23.72	-9.73	-3.52	10.47	29.72	-19.25	
5755	151	AVG	242T	9.05	11.77	13.63	9.05	11.86	13.69	30.00	-16.31	-3.52	10.17	-	-	
5795	159	AVG	242T	9.21	12.16	13.94	8.97	11.90	13.69	30.00	-16.06	-3.52	10.42	-	-	

Table 7-50. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

5GHz (60MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index									Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					61			62			64								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
5210	42	AVG	242T	9.48	9.58	12.54	9.61	10.09	12.87	9.40	9.82	12.63	23.98	-11.11	-2.89	9.98	22.78	-12.80	
5290	58	AVG	242T	9.84	9.85	12.86	9.95	10.00	12.99	9.81	9.92	12.88	23.75	-10.76	-2.89	10.10	29.75	-19.65	
5530	106	AVG	242T	9.25	10.40	12.87	9.25	10.55	12.96	9.05	10.62	12.92	23.72	-10.76	-3.52	9.44	29.72	-20.28	
5610	122	AVG	242T	9.01	10.31	12.72	8.95	10.60	12.86	9.07	10.66	12.95	23.72	-10.77	-3.52	9.43	29.72	-20.29	
5690	138	AVG	242T	9.01	10.35	12.74	9.07	10.47	12.84	9.04	10.53	12.86	23.72	-10.86	-3.52	9.34	29.72	-20.38	
5775	155	AVG	242T	8.42	11.11	12.98	8.17	10.88	12.74	7.99	10.83	12.65	30.00	-17.02	-3.52	9.46	-	-	

Table 7-51. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (242 Tones)

FCC ID: A3LSMF907N			<b>MEASUREMENT REPORT</b> <b>(CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset		Page 97 of 330	

## MIMO Conducted Output Power Measurements (484 Tones)

5GHz (40MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65								
					ANT1	ANT2	MIMO						
	5190	38	AVG	484T	10.32	10.72	13.53	23.98	-10.45	-2.89	10.65	22.78	-12.13
	5230	46	AVG	484T	10.25	10.72	13.50	23.98	-10.48	-2.89	10.62	22.78	-12.16
	5270	54	AVG	484T	10.47	10.82	13.66	23.75	-10.09	-2.89	10.77	29.75	-18.98
	5310	62	AVG	484T	10.24	10.92	13.60	23.75	-10.15	-2.89	10.72	29.75	-19.03
	5510	102	AVG	484T	8.93	10.42	12.75	23.72	-10.97	-3.52	9.23	29.72	-20.49
	5590	118	AVG	484T	9.76	11.39	13.66	23.72	-10.06	-3.52	10.14	29.72	-19.58
	5710	142	AVG	484T	9.79	11.43	13.70	23.72	-10.02	-3.52	10.18	29.72	-19.54
	5755	151	AVG	484T	9.05	12.12	13.86	30.00	-16.14	-3.52	10.34	-	-
	5795	159	AVG	484T	9.05	12.24	13.94	30.00	-16.06	-3.52	10.42	-	-

Table 7-52. MIMO 40MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index						Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					65			66								
					ANT1	ANT2	MIMO	ANT1	ANT2	MIMO						
	5210	42	AVG	484T	9.69	10.10	12.91	9.62	10.28	12.97	23.98	-11.01	-2.89	10.09	22.78	-12.69
	5290	58	AVG	484T	9.56	9.58	12.58	9.45	9.78	12.63	23.75	-11.12	-2.89	9.74	29.75	-20.01
	5530	106	AVG	484T	9.03	10.21	12.67	8.75	10.48	12.71	23.72	-11.01	-3.52	9.19	29.72	-20.53
	5610	122	AVG	484T	8.70	10.22	12.54	8.62	10.35	12.58	23.72	-11.14	-3.52	9.06	29.72	-20.66
	5690	138	AVG	484T	8.70	10.31	12.59	8.77	10.40	12.67	23.72	-11.05	-3.52	9.15	29.72	-20.57
	5775	155	AVG	484T	8.10	11.08	12.85	8.37	11.07	12.94	30.00	-17.06	-3.52	9.42	-	-

Table 7-53. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (484 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 98 of 330		

### MIMO Conducted Output Power Measurements (996 Tones)

5GHz (80MHz Bandwidth)	Freq [MHz]	Channel	Detector	Tones	RU Index			Conducted Power Limit [dBm]	Conducted Power Margin [dB]	Directional Ant. Gain [dBi]	Max e.i.r.p. [dBm]	Max e.i.r.p. Limit [dBm]	e.i.r.p. Margin [dB]
					67								
					ANT1	ANT2	MIMO						
	5210	42	AVG	996T	9.70	9.87	12.80	23.98	-11.18	-2.89	9.91	22.78	-12.87
	5290	58	AVG	996T	10.07	9.84	12.97	23.75	-10.78	-2.89	10.08	29.75	-19.67
	5530	106	AVG	996T	8.84	10.79	12.93	23.72	-10.79	-3.52	9.41	29.72	-20.31
	5610	122	AVG	996T	8.71	10.80	12.89	23.72	-10.83	-3.52	9.37	29.72	-20.35
	5690	138	AVG	996T	8.75	10.81	12.91	23.72	-10.81	-3.52	9.39	29.72	-20.33
	5775	155	AVG	996T	7.80	11.05	12.73	30.00	-17.27	-3.52	9.21	-	-

**Table 7-54. MIMO 80MHz BW (UNII) Maximum Conducted Output Power (996 Tones)**

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 99 of 330	

**Note:**

Per ANSI C63.10-2013 and KDB 662911 v02r01 Section E1), the conducted powers at Antenna 1 and Antenna 2 were first measured separately during MIMO transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Per ANSI C63.10-2013 Section 14.4.3, the directional gain is calculated using the following formula, where  $G_N$  is the gain of the nth antenna and  $N_{ANT}$ , the total number of antennas used.

$$\text{Directional gain} = 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi}$$

**Sample Directional Gain Calculation:**

Assuming the antenna gain is -5.50 dBi for Antenna-1 and -6.05 dBi for Antenna-2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}] \text{ dBi} \\ &= 10 \log[(10^{-5.50/20} + 10^{-6.05/20} / 2] \text{ dBi} \\ &= (-2.89) \text{ dBi} \end{aligned}$$

**Sample MIMO Calculation:**

Assuming the average conducted output power was measured to be 8.13 dBm for Antenna-1 and 7.48 dBm for Antenna-2.

Antenna 1 + Antenna 2 = MIMO

$$(8.13 \text{ dBm} + 7.48 \text{ dBm}) = (6.50 \text{ mW} + 5.60 \text{ mW}) = 12.10 \text{ mW} = 10.83 \text{ dBm}$$

**Sample e.i.r.p. Calculation:**

Assuming the average MIMO conducted power was calculated to be 10.83 dBm with directional gain of -2.89 dBi.

$$\text{e.i.r.p. (dBm)} = \text{Conducted Power (dBm)} + \text{Ant gain (dBi)}$$

$$10.83 \text{ dBm} + (-2.89) \text{ dBi} = 7.94 \text{ dBm}$$

<b>FCC ID:</b> A3LSMF907N		<b>MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 100 of 330	

**7.5 Maximum Power Spectral Density – 802.11ax OFDMA**  
§15.407(a.1.iv) §15.407(a.2) §15.407(a.3); RSS-247 [6.2]

**Test Overview and Limit**

The spectrum analyzer was connected to the antenna terminal while the EUT was operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. Method SA-1, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, was used to measure the power spectral density.

***In the 5.15 – 5.25GHz, 5.25 – 5.35GHz, 5.47 – 5.725GHz bands, the maximum permissible power spectral density is 11dBm/MHz.***

***In the 5.725 – 5.850GHz band, the maximum permissible power spectral density is 30dBm/500kHz.***

**Test Procedure Used**

ANSI C63.10-2013 – Section 12.3.2.2  
 KDB 789033 D02 v02r01 – Section F  
 ANSI C63.10-2013 – Section 14.3.2.2 Measure-and-Sum Technique  
 KDB 662911 v02r01 – Section E)2) Measure-and-Sum Technique

**Test Settings**

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire emission bandwidth of the signal
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points  $\geq 2 \times$  (span/RBW)
6. Sweep time = auto
7. Detector = power averaging (RMS)
8. Trigger was set to free run for all modes
9. Trace was averaged over 100 sweeps
10. The peak search function of the spectrum analyzer was used to find the peak of the spectrum.

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 7-4. Test Instrument & Measurement Setup**

**Test Notes**

The power spectral density for each channel was measured with the RU index showing the highest conducted power

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 101 of 330	

### SISO Antenna-1 Power Spectral Density Measurements (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.11	11.0	-3.89
	5200	40	ax (20MHz)	26T	MCS0	6.96	11.0	-4.04
	5240	48	ax (20MHz)	26T	MCS0	8.07	11.0	-2.93
	5190	38	ax (40MHz)	26T	MCS0	8.39	11.0	-2.61
	5230	46	ax (40MHz)	26T	MCS0	8.65	11.0	-2.35
	5210	42	ax (80MHz)	26T	MCS0	7.59	11.0	-3.41
Band 2A	5260	52	ax (20MHz)	26T	MCS0	7.07	11.0	-3.93
	5280	56	ax (20MHz)	26T	MCS0	7.82	11.0	-3.18
	5320	64	ax (20MHz)	26T	MCS0	8.14	11.0	-2.86
	5270	54	ax (40MHz)	26T	MCS0	8.11	11.0	-2.89
	5310	62	ax (40MHz)	26T	MCS0	8.23	11.0	-2.77
	5290	58	ax (80MHz)	26T	MCS0	7.28	11.0	-3.72
Band 2C	5500	100	ax (20MHz)	26T	MCS0	8.29	11.0	-2.71
	5600	120	ax (20MHz)	26T	MCS0	7.98	11.0	-3.02
	5720	144	ax (20MHz)	26T	MCS0	9.05	11.0	-1.95
	5510	102	ax (40MHz)	26T	MCS0	9.47	11.0	-1.53
	5590	118	ax (40MHz)	26T	MCS0	8.66	11.0	-2.34
	5710	142	ax (40MHz)	26T	MCS0	8.83	11.0	-2.17
	5530	106	ax (80MHz)	26T	MCS0	6.72	11.0	-4.28
	5610	122	ax (80MHz)	26T	MCS0	7.17	11.0	-3.83
	5690	138	ax (80MHz)	26T	MCS0	4.81	11.0	-6.19

Table 7-55. Bands 1, 2A, 2C Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Antenna Gain [dBi]	e.i.r.p. Power Density [dBm/MHz]	ISED Max e.i.r.p. Power Density [dBm/MHz]	Margin [dB]
Band 1	5180	36	ax (20MHz)	26T	MCS0	7.11	-5.50	1.61	10.0	-8.39
	5200	40	ax (20MHz)	26T	MCS0	6.96	-5.50	1.46	10.0	-8.54
	5240	48	ax (20MHz)	26T	MCS0	8.07	-5.50	2.57	10.0	-7.43
	5190	38	ax (40MHz)	26T	MCS0	8.39	-5.50	2.89	10.0	-7.11
	5230	46	ax (40MHz)	26T	MCS0	8.65	-5.50	3.15	10.0	-6.85
	5210	42	ax (80MHz)	26T	MCS0	7.59	-5.50	2.09	10.0	-7.91


Table 7-56. Band 1 e.i.r.p. Conducted Power Spectral Density Measurements (ISED 26 Tones)

FCC ID: A3LSMF907N			MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 102 of 330	





Plot 7-111. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

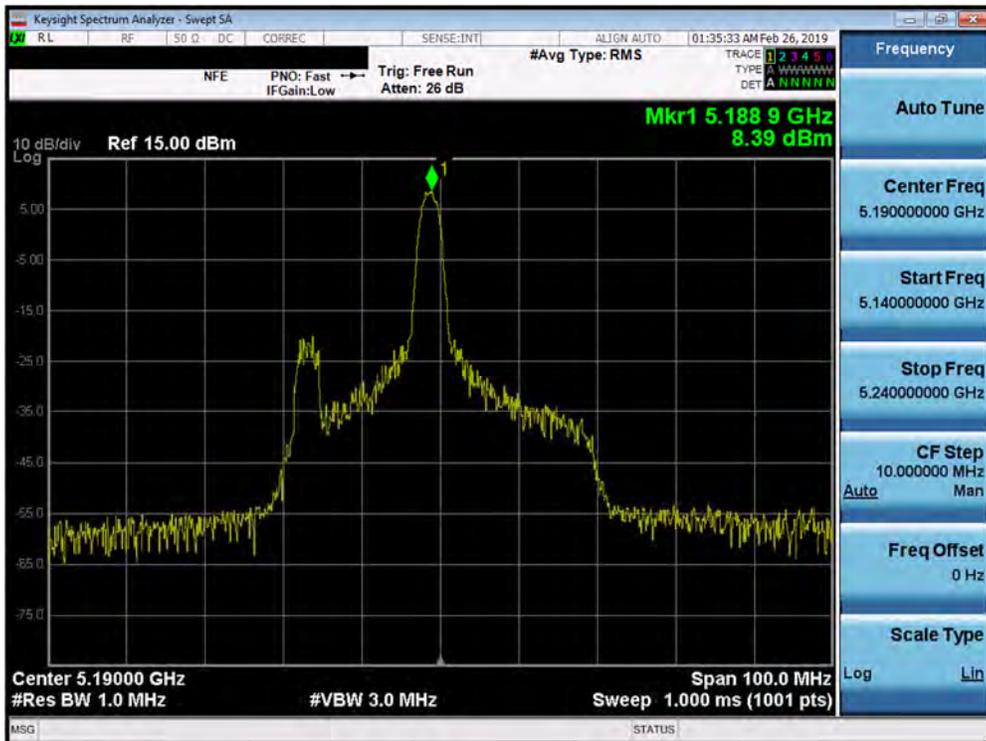


Plot 7-112. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 104 of 330




Plot 7-113. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

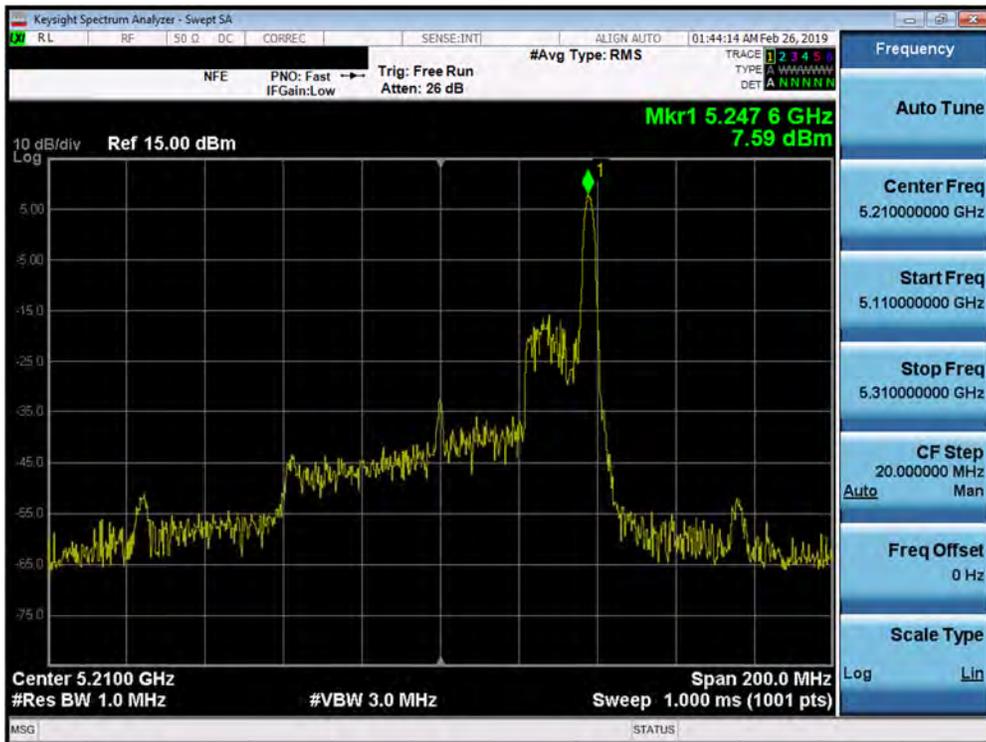

Plot 7-114. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 105 of 330

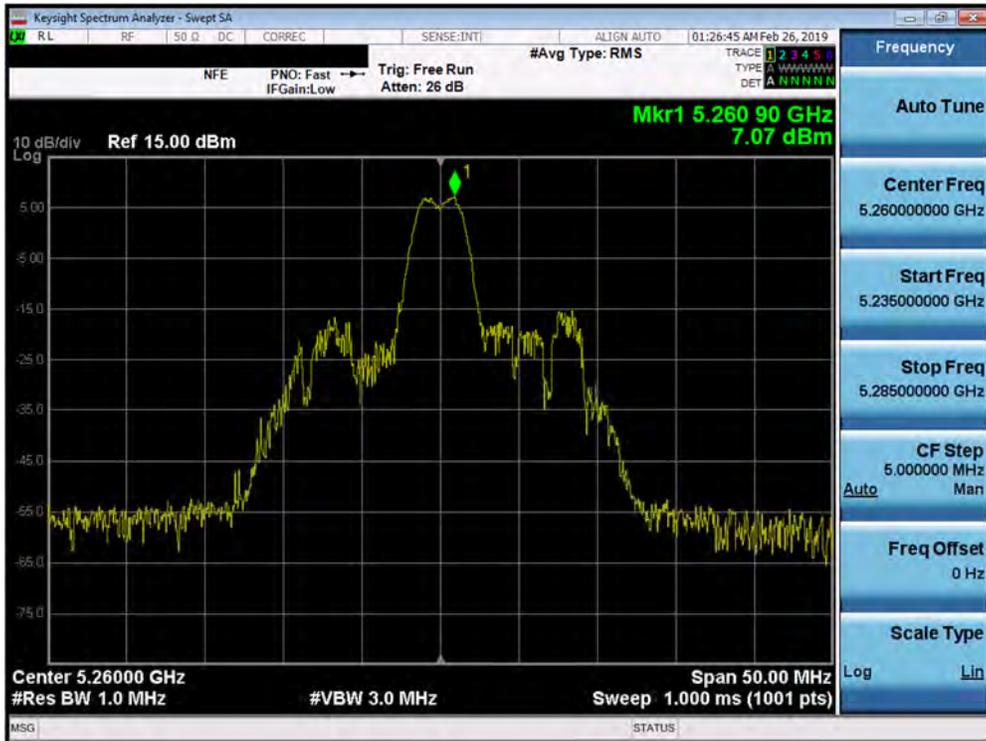

Plot 7-115. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)




Plot 7-116. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 106 of 330





Plot 7-119. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

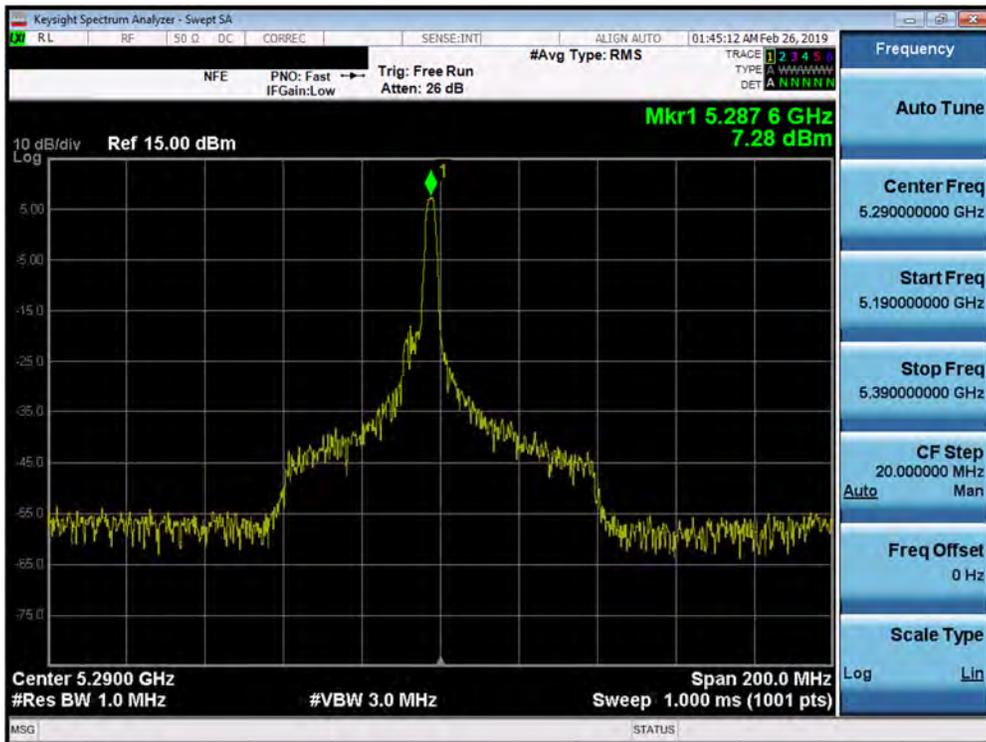

Plot 7-120. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 108 of 330



Plot 7-121. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)




Plot 7-122. Power Spectral Density Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 109 of 330






Plot 7-125. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

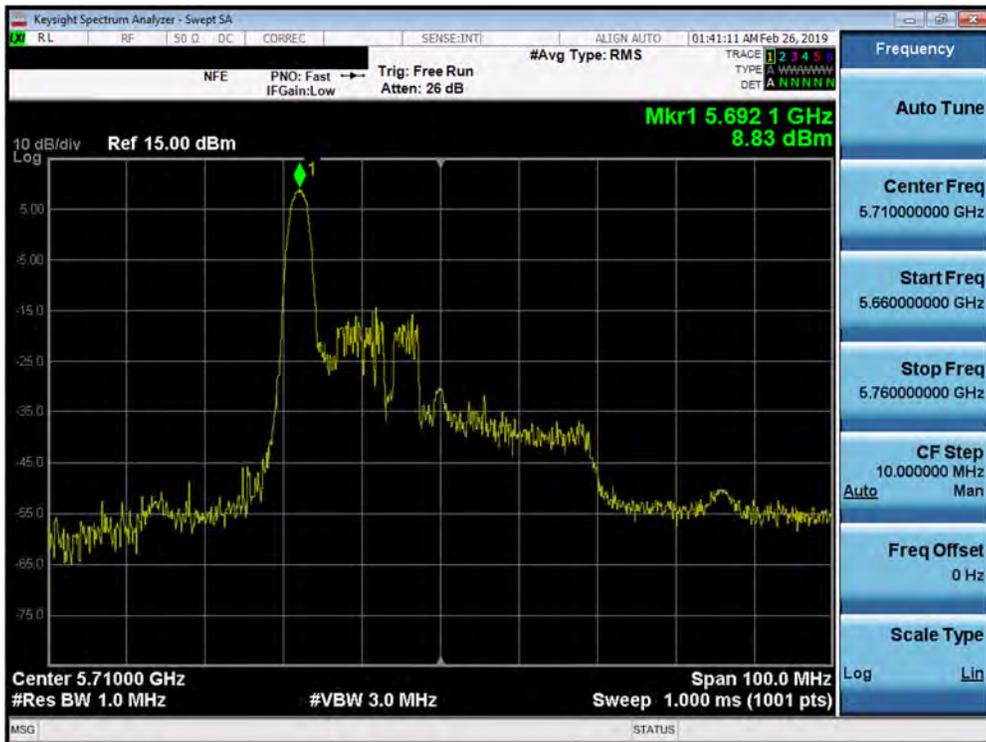


Plot 7-126. Power Spectral Density Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: A3LSMF907N		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 111 of 330

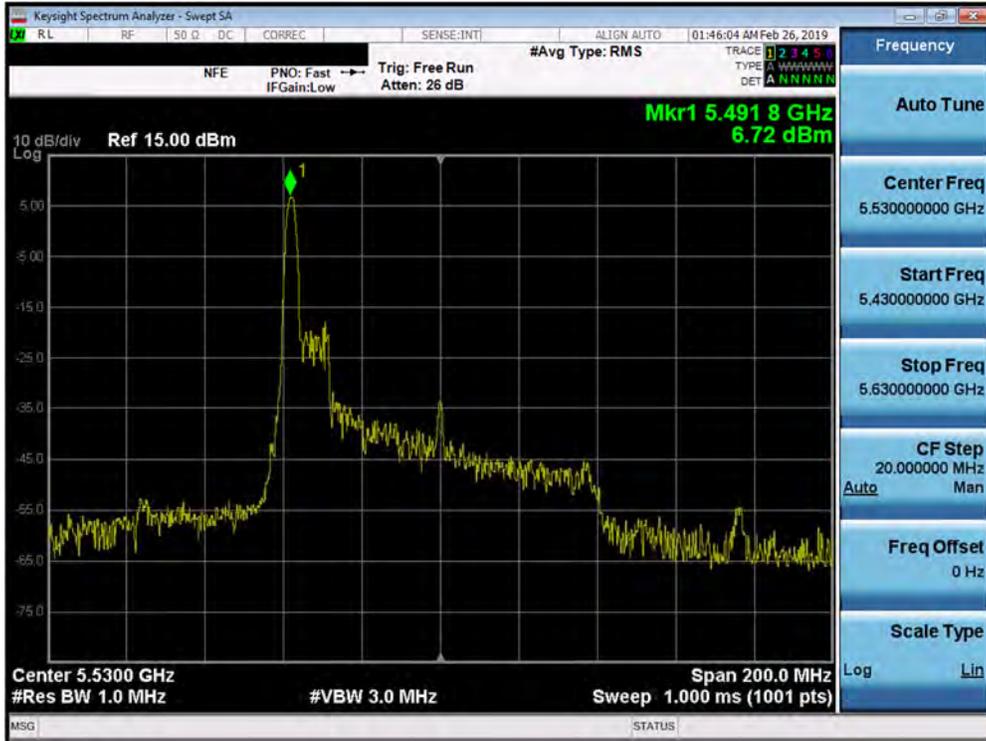


Plot 7-127. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

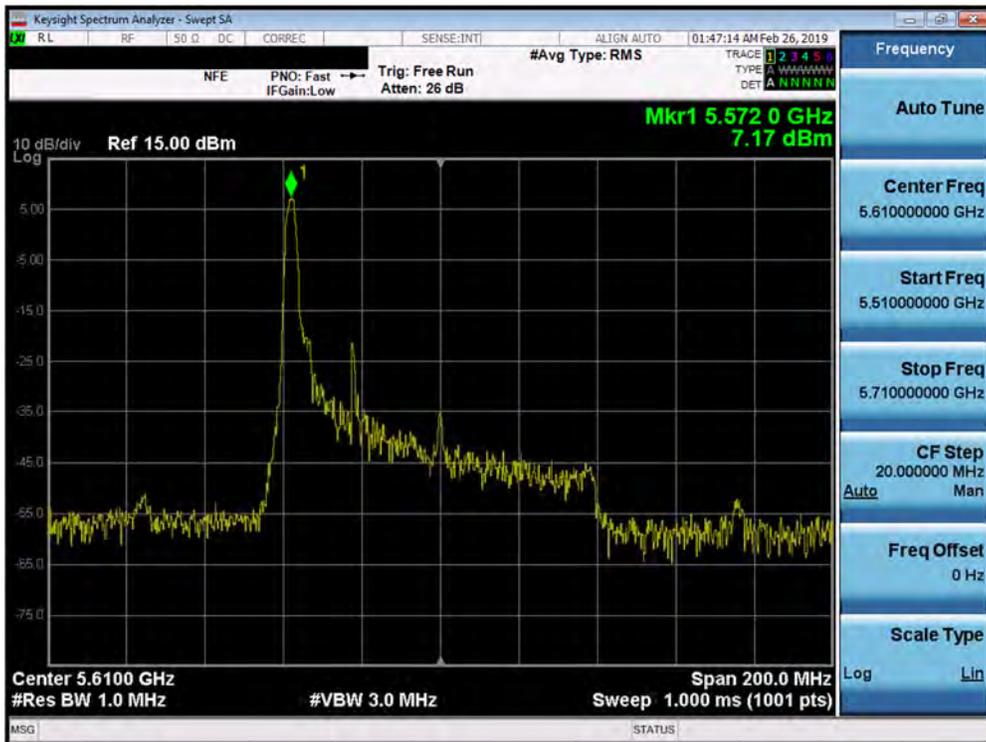

Plot 7-128. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b>			Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset		Page 112 of 330

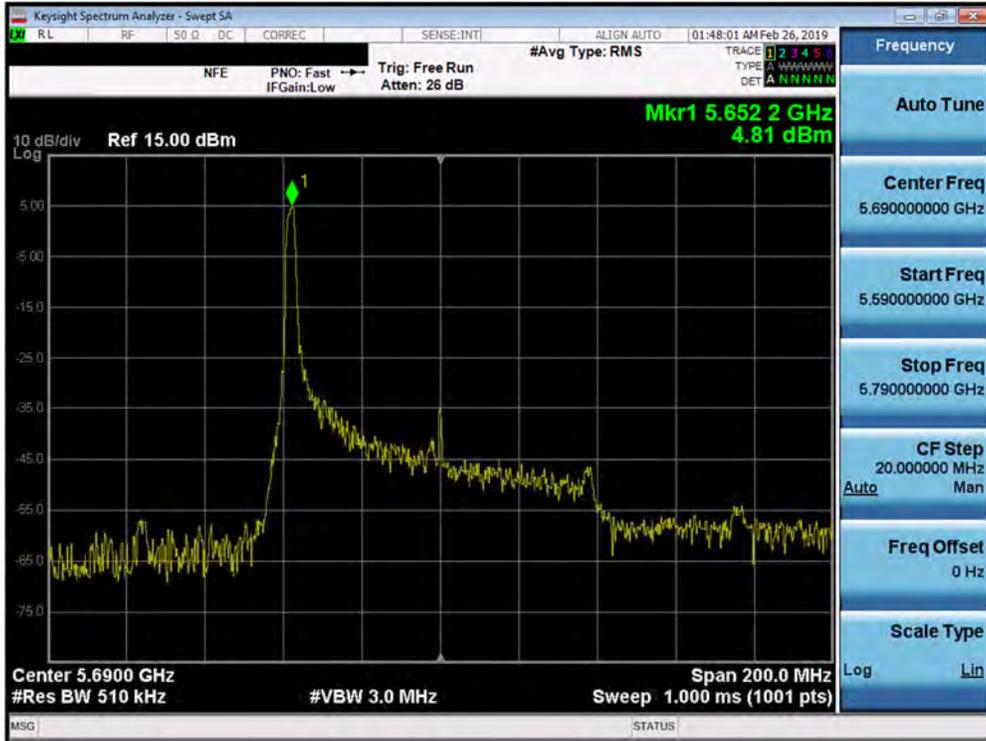

Plot 7-129. Power Spectral Density Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)

FCC ID: A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		Approved by: Quality Manager
Test Report S/N: 1M1902200029-08.A3L	Test Dates: 01/22- 04/05/2019	EUT Type: Portable Handset	Page 113 of 330

	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured Power Density [dBm]	Max Permissible Power Density [dBm/500kHz]	Margin [dB]
<b>Band 3</b>	5745	149	ax (20MHz)	26T	MCS0	6.51	30.00	-23.49
	5785	157	ax (20MHz)	26T	MCS0	6.98	30.00	-23.02
	5825	165	ax (20MHz)	26T	MCS0	6.50	30.00	-23.50
	5755	151	ax (40MHz)	26T	MCS0	6.44	30.00	-23.56
	5795	159	ax (40MHz)	26T	MCS0	5.82	30.00	-24.18
	5775	155	ax (80MHz)	26T	MCS0	8.41	30.00	-21.59

**Table 7-57. Band 3 Conducted Power Spectral Density Measurements SISO ANT1 (26 Tones)**

<b>FCC ID:</b> A3LSMF907N	 <b>MEASUREMENT REPORT (CERTIFICATION)</b> 		<b>Approved by:</b> Quality Manager
<b>Test Report S/N:</b> 1M1902200029-08.A3L	<b>Test Dates:</b> 01/22- 04/05/2019	<b>EUT Type:</b> Portable Handset	Page 114 of 330