

## PCTEST 7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



## HEARING AID COMPATIBILITY

#### Applicant Name:

Samsung Electronics Co., Ltd. 129, Samsung-ro, Maetan dong, Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea Date of Testing: 7/26/2021 - 7/30/2021 Test Site/Location: PCTEST, Columbia, MD, USA Test Report Serial No.: 1M2106280075-06.A3L Date of Issue: 7/30/2021

## FCC ID:

### A3LSMF926B

## **APPLICANT:**

#### Scope of Test: Application Type: FCC Rule Part(s): HAC Standard:

DUT Type: Model: Additional Model(s): Test Device Serial No.: Class II Permissive Change(s): Audio Band Magnetic Testing (T-Coil) Class II Permissive Change CFR §20.19(b) ANSI C63.19-2011 285076 D01 HAC Guidance v05 285076 D02 T-Coil testing for CMRS IP v03 Portable Handset SM-F926B/DS SM-F926B *Pre-Production Sample* [S/N: 0528M] *See FCC Change Document* 

SAMSUNG ELECTRONICS CO., LTD.

## C63.19-2011 HAC Category:

# T3 (SIGNAL TO NOISE CATEGORY); GSM850, UMTS B5, LTE Bands 12/17/13/5/26, NR n5 ONLY)

This report and category only pertain to GSM850, UMTS B5, LTE Band 12/17/13/5/26, and NR n5 modes supported by this wireless portable device. The overall category rating of the device is determined by the lowest rating obtained over all air interfaces supported by the device. This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President



FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dere 1 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 1 of 56
© 2021 PCTEST		•		REV 3.5.M

1.		3
2.	DUT DESCRIPTION	4
3.	ANSI C63.19-2011 PERFORMANCE CATEGORIES	6
4.	METHOD OF MEASUREMENT	8
5.	VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION	17
6.	OTT VOIP TEST SYSTEM AND DUT CONFIGURATION	20
7.	FCC 3G MEASUREMENTS	24
8.	T-COIL TEST SUMMARY	25
9.	MEASUREMENT UNCERTAINTY	31
10.	EQUIPMENT LIST	32
11.	TEST DATA	33
12.	CALIBRATION CERTIFICATES	44
13.	CONCLUSION	51
14.	REFERENCES	52
15.	TEST SETUP PHOTOGRAPHS	54

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 2 of 56
© 2021 PCTEST		•		REV 3.5.M

## 1. INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-8658<sup>1</sup> to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

#### Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

### <sup>1</sup> FCC Rule & Order, WT Docket 01-309 RM-8658

FCC ID: A3LSMF926B	POTEST. Prod to be pet of @ one-and	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 2 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 3 of 56
© 2021 PCTEST	*			REV 3.5.M

## 2. DUT DESCRIPTION



A3LSMF926B		
Samsung Electronics Co., Ltd.		
129, Samsung-ro, Maetan dong,		
Yeongtong-gu, Suwon-si		
Gyeonggi-do 16677, Korea		
SM-F926B/DS		
SM-F926B		
0528M		
REV1.0		
F926BXXU1AUGD		
Internal Antenna		
Portable Handset		

#### I. LTE Band Selection

This device supports the following pair of LTE bands with similar frequencies: LTE B12 & B17. This pair of LTE bands have the same target powers and share the same transmission paths. Since the supported frequency span for the smaller LTE bands are completely covered by the larger LTE bands, only the larger LTE band (LTE B12) was evaluated for hearing-aid compliance. LTE B5 is an LTE anchor band for dual connectivity (EN-DC) scenarios between LTE and NR so they were additionally evaluated as independent LTE bands.

FCC ID: A3LSMF926B	Portest Prod to be port of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 4 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 4 of 56
© 2021 PCTEST	·	· · · · · · · · · · · · · · · · · · ·		REV 3.5.M

Air-Interface	Band (MHz)	Type Transport	HAC Tested	Simultaneous But Not Tested	Name of Voice Service	Audio Codec Evaluated
GSM	850 1900	vo	Yes <sup>4</sup> No <sup>4</sup>	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	EFR
	GPRS/EDGE	VD	Yes <sup>4</sup>	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS
	850		Yes <sup>4</sup>			
UMTS	1700	VD	No <sup>4</sup>	Yes: WIFI or BT	CMRS Voice <sup>1</sup>	NB AMR, WB AMR
UIVITS	1900		NO			
	HSPA	VD	Yes <sup>4</sup>	Yes: WIFI or BT	Google Duo <sup>2</sup>	OPUS
	700 (B12)					
	700 (B17)					
	780 (B13)		Yes <sup>4</sup>			
	850 (B5)					VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
LTE (FDD)	850 (B26)	VD		Yes: NR, WIFI or BT	VoLTE <sup>1</sup> , Google Duo <sup>2</sup>	
	1700 (B4)					
	1700 (B66)		No <sup>4</sup>			
	1900 (B2)		110			
	1900 (B25)					
LTE (TDD)	2599 (B41)	VD	No <sup>4</sup>	Yes: NR, WIFI or BT	VoLTE <sup>1</sup> , Google Duo <sup>2</sup>	VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS
NR (FDD)	850 (n5) 1700 (n66)	VD	Yes <sup>3,4</sup> No <sup>4</sup>	Yes: LTE, WIFI or BT	Google Duo <sup>2</sup>	OPUS
	2450					
	5200 (U-NII 1)					
	5300 (U-NII 2A)					
	5500 (U-NII 2C)					
WIFI	5800 (U-NII 3)	VD	No <sup>4</sup>	Yes: GSM, UMTS, LTE, or NR	VoWIFI <sup>2</sup> , Google Duo <sup>2</sup>	VoWIFI: NB AMR, WB AMR, EVS Google Duo: OPUS
	6175 (U-NII 5)	1				Google Duo. 0P03
	6475 (U-NII 6)					
	6700 (U-NII 7)	DO (U-NII 7)				
	7000 (U-NII 8)					
BT	2450	DT	No	Yes: GSM, UMTS, LTE, or NR	N/A	N/A
-						

# Table 2-1 A3LSMF926B HAC Air Interfaces

FCC ID: A3LSMF926B	POTEST: Proud to be part of & element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 5 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 5 of 56
© 2021 PCTEST	·			REV 3.5.M

## 3. ANSI C63.19-2011 PERFORMANCE CATEGORIES


## I. MAGNETIC COUPLING

#### Axial and Radial Field Intensity


All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be  $\geq$  -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

#### **Frequency Response**

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz – 3000 Hz per §8.3.2.

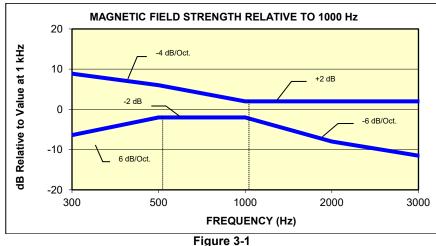

Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

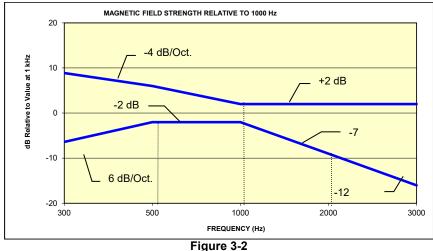

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 6 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 6 of 56
© 2021 PCTEST	·	•		REV 3.5.M

#### **Signal Quality**

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

Catanan	Telephone RF Parameters		
Category	Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB]		
T1	0 to 10 dB		
T2	10 to 20 dB		
Т3	20 to 30 dB		
T4	<b>T4</b> > 30 dB		
Table 3-1 Magnetic Coupling Parameters			

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 7 of 56
© 2021 PCTEST		·		REV 3.5.M

## 4. METHOD OF MEASUREMENT

## I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:


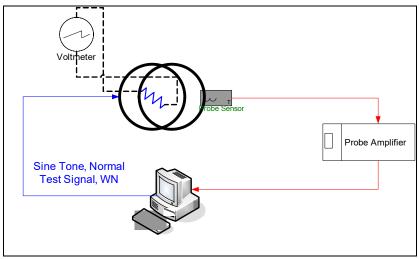


Figure 4-1 Validation Setup with Helmholtz Coil

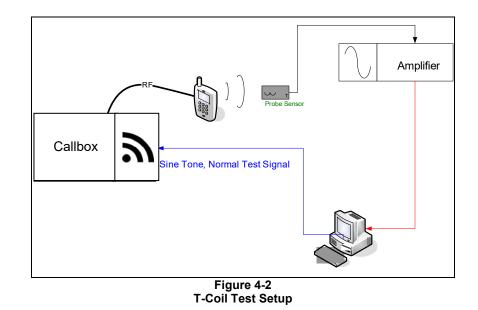

FCC ID: A3LSMF926B		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 9 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 8 of 56
© 2021 PCTEST	-	·		REV 3.5.M

## II. Scanning Mechanism

Manufacturer:	TEM
Accuracy:	± 0.83 cm/meter
Minimum Step Size:	0.1 mm
Maximum speed	6.1 cm/sec
Line Voltage:	115 VAC
Line Frequency:	60 Hz
Material Composite:	Delrin (Acetal)
Data Control:	Parallel Port
Dynamic Range (X-Y-Z):	45 x 31.75 x 47 cm
Dimensions:	36" x 25" x 38"
Operating Area:	36" x 49" x 55"
Reflections:	< -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

## III. 3GPP2 Normal Test Signal (Speech)

Manufacturer:	3GPP2 (TIA 1042 §3.3.1)
	Modified-IRS weighted, multi-talker speech signal, 4 Male and 4 Female
Stimulus Type:	speakers (alternating)
Single Sample Duration:	51.62 seconds
Activity Level:	77.4%




Figure 4-4 Temporal Characteristic of Normal Test Signal

FCC ID: A3LSMF926B	Portest Prod to be part at @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 0 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 9 of 56
© 2021 PCTEST	•	· · · · · · · · · · · · · · · · · · ·		REV 3.5.M

ABM1 Measurement Block Diagram:

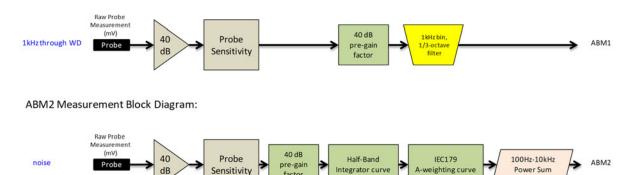


Figure 4-5 Magnetic Measurement Processing Steps

factor

#### IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
  - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 a. octave filtering.
  - b. "A-weighting" and Half-Band Integration was applied to the measurements.
  - Since this measurement was measured in the same method as ABM2 measurements, this level C. was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
  - The measurement system including the probe, pre-amplifier and acquisition system were validated а. as an entire system to ensure the reliability of test measurements.
  - b. ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_{c} = \frac{NI}{r\sqrt{1.25^{3}}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^{3}}}$$

Where H<sub>c</sub> = magnetic field strength in amperes per meter N = number of turns per coil

For the Helmholtz Coil, N=20; r=0.13m; R=10.193Ωand using V=29mV: 0.000


$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316A/m \approx -10dB(A/m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 29).

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 10 of 56
© 2021 PCTEST		·		REV 3.5.M

c. Frequency Response Validation

The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 - 3000 Hz using the Normal signal as shown below:




#### d. ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz – 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

Table 4-1 ABM2 Frequency Response Validation				
	HBI, A -	HBI, A -		
f (Hz)	Measured	Theoretical	dB Var.	
	(dB re 1kHz)	(dB re 1kHz)		
100	-16.180	-16.170	-0.010	
125	-13.257	-13.250	-0.007	
160	-10.347	-10.340	-0.007	
200	-8.017	-8.010	-0.007	
250	-5.925	-5.920	-0.005	
315	-4.045	-4.040	-0.005	
400	-2.405	-2.400	-0.005	
500	-1.212	-1.210	-0.002	
630	-0.349	-0.350	0.001	
800	0.071	0.070	0.001	
1000	0.000	0.000	0.000	
1250	-0.503	-0.500	-0.003	
1600	-1.513	-1.510	-0.003	
2000	-2.778	-2.780	0.002	
2500	-4.316	-4.320	0.004	
3150	-6.166	-6.170	0.004	
4000	-8.322	-8.330	0.008	
5000	-10.573	-10.590	0.017	
6300	-13.178	-13.200	0.022	
8000	-16.241	-16.270	0.029	
10000	-19.495	-19.520	0.025	


FCC ID: A3LSMF926B	PCTEST Proved to be poet of & othersed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 11 of EG
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 11 of 56
© 2021 PCTEST	-			REV 3.5.M

ABM2 Frequency Response Validation (LISTEN)

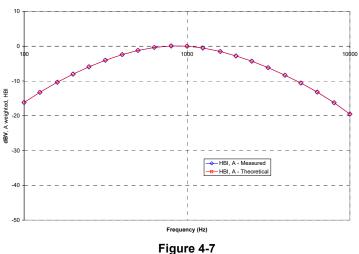

ABM2 Frequency Response Validation


The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-8). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:



The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.


Table 4-2 ABM2 Power Sum Validation				
WN Input (dBV)	Power Sum (dBV)	Multimeter-Full (dBV)	Dev (dB)	
-60	-60.36	-60.2	0.16	
-50	-50.19	-50.13	0.06	
-40	-40.14	-40.03	0.11	
-30	-30.13	-30.01	0.12	
-20	-20.12	-20	0.12	
-10	-10.14	-10	0.14	

FCC ID: A3LSMF926B	PCTEST Proved to be poet of & othersed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 40 af 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 12 of 56
© 2021 PCTEST				REV 3.5.M



#### 3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
  - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-11, the grid is not to scale but merely a graphical representation of the coordinate system in use):

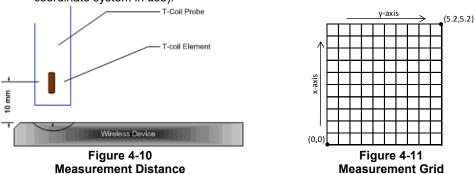

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- iii. These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-13 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
  - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

Standard	Technology	Input Level (dBm0)
TIA/EIA/IS-2000	CDMA	-18
J-STD-007	GSM (217)	-16
T1/T1P1/3GPP	UMTS (WCDMA)	-16
IDEN™	TDMA (22 and 11 Hz)	-18

- See Section 5 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE).
- iii. See Section 6 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.

FCC ID: A3LSMF926B	PCTEST Proof to be perfect @ internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 12 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 13 of 56
© 2021 PCTEST		· ·		REV 3.5.M

- c. Real-Time Analyzer (RTA)
  - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weighted filtering.
- d. WD Radio Configuration Selection
  - The device was chosen to be tested in the worst-case ABM2 condition (See Section 7 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 5 and 6. NR configuration information can be found in Section 6.)
  - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.
- 4. Signal Quality Data Analysis
  - a. Narrow-band Magnetic Intensity
    - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.
  - b. Frequency Response
    - i. The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
    - ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-6. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
    - iii. The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.
  - c. Signal Quality Index
    - i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
    - ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
    - iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

### V. Test Setup




Figure 4-12 Audio Magnetic Field Test Setup

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 14 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 14 of 56
© 2021 PCTEST		•		REV 3.5.M

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

## VI. Deviation from C63.19 Test Procedure

Non-conducted RF connection due to inaccessible RF ports.

### VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil. See Table 2-1 for more details regarding which modes were tested.

### VIII. Wireless Device Channels and Frequencies

#### 1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Please refer to the Original Certification for full evaluation on 2G/3G mode.

Test frequencies & associated channels		
Channel Frequency (MHz)		
Cellular 850		
190 (GSM)	836.60	
4183 (UMTS)	836.60	

Table 4-3 Center Channels and Frequencies

#### 2. 4G (LTE) Modes

The middle channel for every band and bandwidth combination was tested for each probe orientation. The band and bandwidth combination from each probe orientation resulting in the worst-case SNNR was additionally tested using low and high channels for that band and bandwidth combination. The middle channel and supported bandwidths from the worst-case band according to Table 6-4 were additionally evaluated with OTT VoIP for each probe orientation. See Tables 8-6 to 8-13, and 8-16 for LTE bandwidths and channels. Please refer to the Original Certification for full evaluation on 4G (LTE) mode.

#### 3. 5G (NR) Modes

The middle channel and highest supported bandwidth from the worst-case NR FDD band according to Table 6-5 was evaluated with OTT VoIP for each probe orientation. See Table 8-17 for NR evaluation. Please refer to the Original Certification for full evaluation on 5G (NR) mode.

FCC ID: A3LSMF926B	PCTEST Proof to be pert of the internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 15 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset	e Handset	
© 2021 PCTEST	•			REV 3.5.M

## IX. Test Flow

The flow diagram below was followed (From C63.19):

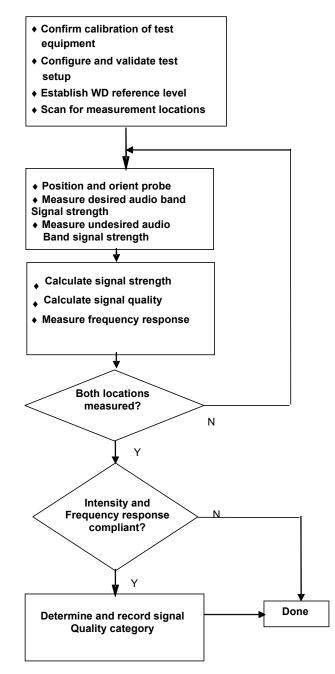


Figure 4-13 C63.19 T-Coil Signal Test Process

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 40 af 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 16 of 56
© 2021 PCTEST		•		REV 3.5.M

REV 3.5.M 8/18/2020

## 5. VOLTE TEST SYSTEM SETUP AND DUT CONFIGURATION

## I. Test System Setup for VoLTE over IMS T-coil Testing

#### 1. Equipment Setup

The general test setup used for VoLTE over IMS is shown below. The callbox used when performing VoLTE over IMS T-coil measurements is a CMW500. The Data Application Unit (DAU) of the CMW500 was used to simulate the IP Multimedia Subsystem (IMS) server.

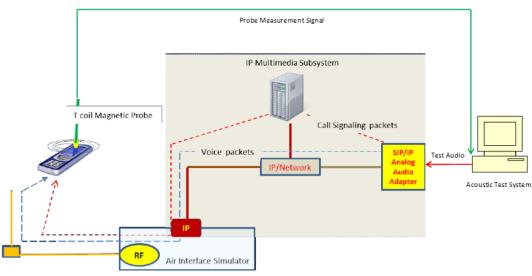


Figure 5-1 Test Setup for VoLTE over IMS T-Coil Measurements

2. Audio Level Settings

According to the July 2012 interpretations by the C63 Committee regarding the appropriate audio levels to be used for VoLTE over IMS T-coil testing, -16dBm0 shall be used for the normal speech input level\*. The CMW500 base station simulator was manually configured to ensure that the settings for speech input and full scale levels resulted in the -16dBm0 speech input level to the DUT for the VoLTE over IMS connection.

\* http://c63.org/documents/misc/posting/new\_interpretations.htm

FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 17 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset	ndset	
© 2021 PCTEST		•		REV 3.5.M

## II. DUT Configuration for VoLTE over IMS T-coil Testing

#### 1. Radio Configuration

An investigation was performed to determine the modulation and RB configuration to be used for testing. The effects of modulation and RB configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation. 64QAM, 1RB, 99%RB offset was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different radio configurations:

VoLTE over IMS SNNR by Radio Configuration									
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
12	707.5	23095	10	QPSK	1	0	9.12	-46.63	55.75
12	707.5	23095	10	QPSK	1	25	9.15	-46.37	55.52
12	707.5	23095	10	QPSK	1	49	8.97	-43.31	52.28
12	707.5	23095	10	QPSK	25	0	8.96	-52.82	61.78
12	707.5	23095	10	QPSK	25	12	9.20	-51.41	60.61
12	707.5	23095	10	QPSK	25	25	9.15	-49.96	59.11
12	707.5	23095	10	QPSK	50	0	9.02	-50.64	59.66
12	707.5	23095	10	16QAM	1	0	9.12	-43.38	52.50
12	707.5	23095	10	16QAM	1	25	9.02	-40.48	49.50
12	707.5	23095	10	16QAM	1	49	9.30	-39.53	48.83
12	707.5	23095	10	16QAM	25	0	9.01	-51.66	60.67
12	707.5	23095	10	16QAM	25	12	9.21	-46.97	56.18
12	707.5	23095	10	16QAM	25	25	9.01	-49.80	58.81
12	707.5	23095	10	16QAM	50	0	8.90	-49.65	58.55
12	707.5	23095	10	64QAM	1	0	8.83	-42.68	51.51
12	707.5	23095	10	64QAM	1	25	8.97	-38.60	47.57
12	707.5	23095	10	64QAM	1	49	9.16	-38.06	47.22
12	707.5	23095	10	64QAM	25	0	9.11	-50.72	59.83
12	707.5	23095	10	64QAM	25	12	9.20	-51.16	60.36
12	707.5	23095	10	64QAM	25	25	9.23	-49.63	58.86
12	707.5	23095	10	64QAM	50	0	9.24	-50.45	59.69
12	707.5	23095	10	256QAM	1	0	8.94	-47.89	56.83
12	707.5	23095	10	256QAM	1	25	9.27	-44.91	54.18
12	707.5	23095	10	256QAM	1	49	8.95	-42.32	51.27
12	707.5	23095	10	256QAM	25	0	9.07	-51.00	60.07
12	707.5	23095	10	256QAM	25	12	9.06	-50.16	59.22
12	707.5	23095	10	256QAM	25	25	9.27	-51.24	60.51
12	707.5	23095	10	256QAM	50	0	8.98	-51.82	60.80

Table 5	5-1
Vol TE over IMS SNNR by	Radio Configuratio

### 2. Codec Configuration

An investigation was performed to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration was used for this investigation. The NB AMR 4.75kbps setting was used for the audio codec on the CMW500 for VoLTE over IMS T-coil testing. See below table for comparisons between different codecs and codec data rates:

	AMR Codec Investigation – VoLTE over IMS								
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Band / BW	Channel		
ABM1 (dBA/m)	14.46	13.52	9.29	8.92		LTE B12 10MHz	23095		
ABM2 (dBA/m)	-40.67	-40.54	-40.97	-40.93	Axial				
Frequency Response	Pass	Pass	Pass	Pass	Axiai				
S+N/N (dB)	55.13	54.06	50.26	49.85					

Table 5-2 AMR Codec Investigation – VoLTE over IMS

Mute on; Backlight off; Max Volume; Max Contrast

TPC = "Max Power"


FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 40 of 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 18 of 56
© 2021 PCTEST		•		REV 3.5.M

	EVS Codec Investigation - VoLTE over IMS									
Codec Setting:	EVS Primary SWB 128kbps	EVS Primary SWB 9.6kbps	EVS Primary WB 128kbps		EVS Primary NB 24.4kbps	EVS Primary NB 5.9kbps	Orientation	Band / BW	Channel	
ABM1 (dBA/m)	11.79	11.16	14.57	14.20	9.28	9.22	- Axial			
ABM2 (dBA/m)	-41.15	-40.88	-40.98	-40.34	-40.95	-41.15		LTE B12 10MHz	23095	
Frequency Response	Pass	Pass	Pass	Pass	Pass	Pass				
S+N/N (dB)	52.94	52.04	55.55	54.54	50.23	50.37				

Table 5-3

Mute on; Backlight off; Max Volume; Max Contrast TPC = "Max Power" •

.



FCC ID: A3LSMF926B	PCTEST Proof to be port of @ internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 10 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 19 of 56
© 2021 PCTEST	•			REV 3.5.M

8/18/2020

## 6. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

### I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

#### 2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

#### 3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation<sup>2</sup>. The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

### II. DUT Configuration for OTT VoIP T-Coil Testing

#### 1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See below tables for comparisons between codec data rates on all applicable data modes:

Codec Investigation – OTT VoIP (EDGE)							
Codec Setting:	75kbps	6kbps	Orientation	Channel			
ABM1 (dBA/m)	11.23	11.76					
ABM2 (dBA/m)	-22.37	-20.33	Axial	190			
Frequency Response	Pass	Pass					
S+N/N (dB)	33.60	32.09					

Table 6-1

2	<sup>2</sup> FCC Office of Engineering	and Technology KDB	, "285076 D02 T-Coil Testing	g for CMRS IP v03," September 13, 2017

FCC ID: A3LSMF926B	PCTEST Proud to be port at @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Page 20 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset	rtable Handset	
© 2021 PCTEST				REV 3.5.M

REV 3.5.M 8/18/2020


Codec Investigation – OTT VoIP (HSPA)									
Codec Setting:	75kbps	6kbps	Orientation	Channel					
ABM1 (dBA/m)	11.92	11.85							
ABM2 (dBA/m)	-46.77	-45.75	Axial	4183					
Frequency Response	Pass	Pass		4100					
S+N/N (dB)	58.69	57.60							

 Table 6-2

 Codec Investigation – OTT VoIP (HSPA)

Table 6-3 Codec Investigation – OTT VoIP (LTE)

Codec Setting:	75kbps	6kbps	Orientation	Band / BW	Channel
ABM1 (dBA/m)	11.21	11.06			
ABM2 (dBA/m)	-42.09	-41.55	Axial	LTE B12 10MHz	23095
Frequency Response	Pass	Pass			
S+N/N (dB)	53.30	52.61			



FCC ID: A3LSMF926B	PCTEST Proof to be port of the internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 21 of 56
© 2021 PCTEST				REV 3.5.M

8/18/2020

#### 2. Radio Configuration for OTT VoIP (LTE)

An investigation was performed to determine the worst-case LTE FDD band to be used for OTT VoIP testing. LTE FDD Band 13 with the M1 antenna configuration was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different LTE FDD bands:

			• · · · • • · ·	(,,,,,,,					
Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Modulation	RB Size	RB Offset	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	SNNR [dB]
12	707.5	23095	10	64QAM	1	49	11.46	-41.91	53.37
12 - M1 only	707.5	23095	10	64QAM	1	49	11.46	-40.09	51.55
13	782.0	23230	10	64QAM	1	49	11.52	-40.84	52.36
13 - M1 only	782.0	23230	10	64QAM	1	49	11.51	-38.04	49.55
26	831.5	26865	15	64QAM	1	49	11.50	-41.72	53.22
26 - M1 + M2	831.5	26865	15	64QAM	1	49	11.36	-42.76	54.12
5	836.5	20525	10	64QAM	1	49	11.49	-40.27	51.76
5 - M1 + M2	836.5	20525	10	64QAM	1	49	11.33	-39.99	51.32

Table 6-4							
OTT VoIP	(LTE FDD)	SNNR by	/ LTE Band				

#### 3. Interim Procedure for evaluation OTT VoIP (NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
- Establish the ABM1<sub>NR</sub> value by using the ABM1<sub>LTE</sub> magnetic intensity for an LTE call using a b. correlating LTE band through existing procedures and test equipment.
- Establish an ABM2<sub>NR</sub> value using factory test mode (FTM) to simulate a NR connection for the C. desired NR band and channel under test.
- The following information is documented in Section 9: d.
  - i. ABM2LTE and ABM2NR for respective tests.
    - ii. Calculate SNNR:
      - 1.  $ABM1 = ABM1_{LTE}$ 2.  $ABM2 = ABM2_{NR}$

      - $SNNR_{NR} = [ABM1_{LTE} ABM2_{NR}] 3dB$ 3.

a. A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 00 of 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 22 of 56
© 2021 PCTEST				REV 3.5.M

#### 4. Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the procedure outlined in 6.II.3 was used to evaluate the SNNR for each radio configuration below. DFT-s-OFDM 64QAM, 1RB, 50%RB offset was determined to be the worst-case configuration for the handset and will be used for full testing in Section 8. Please refer to the Original Certification test report for more information regarding radio configuration selection.

An investigation was performed to determine the worst-case NR FDD band to be used for OTT VoIP testing. NR n5 with the M1 + M2 antenna configuration was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR FDD bands:

Band	Frequency [MHz]	Channel	Bandwidth [MHz]	Waveform	Modulation	RB Size	RB Offset	ABM1 <sub>LTE</sub> [dB(A/m)]	ABM2 <sub>NR</sub> [dB(A/m)]	SNNR <sub>NR</sub> [dB]
n5	836.5	167300	20	DFT-s-OFDM	64QAM	1	53	11.49	-45.72	57.21
n5 - M1 + M2	836.5	167300	20	DFT-s-OFDM	64QAM	1	53	11.33	-42.52	53.85

Table 6-5 OTT VoIP (NR FDD) SNNR by Band

FCC ID: A3LSMF926B	PCTEST Proof to be pert of @ internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dawa 00 af 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 23 of 56
© 2021 PCTEST	•	·		REV 3.5.M

REV 3.5.M 8/18/2020

## 7. FCC 3G MEASUREMENTS

## I. UMTS Test Configurations

An investigation was performed to determine the audio codec configuration to be used for testing. The NB AMR 4.75kbps setting was used for the audio codec on the CMW500 for UMTS testing. See below table for comparisons between different codecs and codec data rates:

	Codec Investigation - UMTS										
Codec Setting:	WB AMR 23.85kbps	WB AMR 6.60kbps	NB AMR 12.2kbps	NB AMR 4.75kbps	Orientation	Channel					
ABM1 (dBA/m)	14.85	14.08	9.53	9.37							
ABM2 (dBA/m)	-52.04	-52.37	-52.14	-52.26	Axial	4183					
Frequency Response	Pass	Pass	Pass	Pass		4105					
S+N/N (dB)	66.89	66.45	61.67	61.63							

	Table 7-1	
Codec	Investigation	- UMTS

• Mute on; Backlight off; Max Volume; Max Contrast

TPC="All 1s"

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 04 -4 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 24 of 56
© 2021 PCTEST	•	•		REV 3.5.M

REV 3.5.M 8/18/2020

## 8. T-COIL TEST SUMMARY

			esponse rgin	Intensity Verdict Verdict		Margin from	C63.19-2011		
C63 10	Section	8.3	3.2	8.3	3.1	8.	3.4	(dB)	Rating
005.18	Section	Axial	Radial	Axial	Radial	Axial	Radial		
GSM	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-5.33	Т3
EDGE (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-9.76	Т3
UMTS	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-39.78	Τ4
HSPA (OTT VoIP)	Cellular	PASS	NA	PASS	PASS	PASS	PASS	-33.25	Τ4
	B12	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD	B13	PASS	NA	PASS	PASS	PASS	PASS	-26.35	Т4
LIEFDD	B26	PASS	NA	PASS	PASS	PASS	PASS	-20.35	14
	B5	PASS	NA	PASS	PASS	PASS	PASS		
LTE FDD (OTT VoIP)	B13 - M1 only	PASS	NA	PASS	PASS	PASS	PASS	-29.62	Τ4
NR FDD (OTT VoIP)	n5 - M1 + M2	NA	NA	PASS	PASS	PASS	PASS	-30.72	Τ4

#### Table 8-1 Consolidated Tabled Results

## I. Raw Handset Data

Table 8-2 Raw Data Results for GSM

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
GSM850	Axial	128	10.00	-15.33	-61.66	2.00	25.33	20.00	-5.33	Т3	1.6, 1.8
GSINIOSU	Radial	128	0.08	-32.58	-62.66	N/A	32.66	20.00	-12.66	T4	1.6, 1.2

 Table 8-3

 Raw Data Results for GSM – Ant M1 + M2 Spot-check

	Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
ſ	GSM850	Axial	128	9.89	-15.85	-61.66	2.00	25.74	20.00	-5.74	T3	1.6, 1.8
	GSM850	Radial	190	0.04	-32.00	-62.66	N/A	32.04	20.00	-12.04	T4	1.6, 1.2

Table 8-4 **Raw Data Results for UMTS** Frequency Margin from Ambient Noise FCC Limit ABM1 ABM2 S+N/N C63.19-2011 Test Mode Orientation Channel Response FCC Limit [dB(A/m)] [dB(A/m)] [dB(A/m)] (dB) (dB) Rating Coordinates Margin (dB) (dB) Axial 4183 8.78 -51.00 -61.66 2.00 59.78 20.00 Τ4 1.6, 1.8 -39.7 UMTS V 4183 N/A 20.00 Τ4 -62.66 60.74 Radial 0.87 -59.87 1.6.2.6

			Table	8-5		
- 1	Raw Data	<b>Results</b> 1	for UMTS -	– Ant M1 +	HM2 Spot	t-check
				England and and		

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
	Axial	4183	9.34	-52.81	-61.66	2.00	62.15	20.00	-42.15	T4	1.6, 1.8
UMTS V	Radial	4183	1.74	-59.19	-62.66	N/A	60.93	20.00	-40.93	T4	1.6, 2.6

FCC ID: A3LSMF926B	PCTEST Proved to be poet of & minester	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dego 25 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 25 of 56
© 2021 PCTEST	•	•		REV 3.5.M

REV 3.5.M 8/18/2020

#### Table 8-6 Raw Data Results for LTE B12

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
		10MHz	23130	9.04	-39.96		2.00	49.00	20.00	-29.00	T4	
		10MHz	23095	9.07	-38.13		2.00	47.20	20.00	-27.20	T4	
	Axial	10MHz	23060	8.96	-42.42	-61.66	2.00	51.38	20.00	-31.38	T4	1.6, 1.8
	Axiai	5MHz	23095	9.23	-40.69	-01.00	2.00	49.92	20.00	-29.92	T4	1.0, 1.0
	-	3MHz	23095	9.00	-42.32		2.00	51.32	20.00	-31.32	T4	
LTE Band		1.4MHz	23095	9.15	-41.84		2.00	50.99	20.00	-30.99	T4	
12		10MHz	23130	1.12	-47.70	_		48.82	20.00	-28.82	T4	
		10MHz	23095	0.84	-45.51			46.35	20.00	-26.35	T4	
	Radial	10MHz	23060	0.82	-45.66	62.66	NIZA	46.48	20.00	-26.48	T4	1.6, 2.6
	Raulai	5MHz	23095	0.86	-46.63	-62.66	-62.66 N/A	47.49	20.00	-27.49	T4	1.0, 2.0
		3MHz	23095	0.84	-46.44			47.28	20.00	-27.28	T4	
		1.4MHz	23095	0.89	-47.53	1		48.42	20.00	-28.42	T4	

Table 8-7 Raw Data Results for LTE B12 – Ant M1 Spot-check

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Band	Axial	10MHz	23095	9.05	-41.56	-61.66	2.00	50.61	20.00	-30.61	T4	1.6, 1.8
12	Radial	3MHz	23095	0.99	-49.24	-62.66	N/A	50.23	20.00	-30.23	T4	1.6. 2.6

Table 8-8 Raw Data Results for LTE B13

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Ba	nd Axial	5MHz	23230	9.25	-40.73	-61.66	2.00	49.98	20.00	-29.98	T4	1.6, 1.8
13	Radial	5MHz	23230	1.14	-49.38	-62.66	N/A	50.52	20.00	-30.52	T4	1.6, 2.6

Table 8-9 Raw Data Results for LTE B13 – Ant M1 Spot-check

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Ba	nd Axial	5MHz	23230	8.83	-41.04	-61.66	2.00	49.87	20.00	-29.87	T4	1.6, 1.8
13	Radial	10MHz	23230	1.13	-46.09	-62.66	N/A	47.22	20.00	-27.22	T4	1.6, 2.6

Table 8-10 Raw Data Results for LTE B26

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Band	Axial	3MHz	26865	8.78	-44.04	-61.66	2.00	52.82	20.00	-32.82	T4	1.6, 1.8
26	Radial	3MHz	26865	1.23	-48.85	-62.66	N/A	50.08	20.00	-30.08	T4	1.6, 2.6

 Table 8-11

 Raw Data Results for LTE B26 – Ant M1 + M2 Spot-check

Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates
LTE Band	Axial	1.4MHz	26865	9.27	-43.01	-61.66	2.00	52.28	20.00	-32.28	T4	1.6, 1.8
26	Radial	1.4MHz	26865	1.17	-48.65	-62.66	N/A	49.82	20.00	-29.82	T4	1.6, 2.6

Table 8-12 Raw Data Results for LTE B5

						loouno io						-
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Band 5	Axial	10MHz	20525	9.02	-43.47	-61.66	2.00	52.49	20.00	-32.49	T4	1.6, 1.8
LTE Ballu 5	Radial	5MHz	20525	1.16	-49.65	-62.66	N/A	50.81	20.00	-30.81	T4	1.6, 2.6

FCC ID: A3LSMF926B	PCTEST Prod to be pet of the internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 26 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 26 of 56
© 2021 PCTEST	•	· ·		REV 3.5.M

8/18/2020

	Raw Data Results for LTE B3 - Ant with with Spot-check											
Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
LTE Band 5	Axial	3MHz	20525	8.92	-45.07	-61.66	2.00	53.99	20.00	-33.99	T4	1.6, 1.8
LTE Ballu 5	Radial	5MHz	20525	1.16	-49.60	-62.66	N/A	50.76	20.00	-30.76	T4	1.6, 2.6

Table 8-13 Raw Data Results for LTE B5 - Ant M1 + M2 Spot-check

Table 8-14 Raw Data Results for EDGE (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
EDGE850	Axial	190	11.76	-19.81	-61.66	2.00	31.57	20.00	-11.57	T4	1.6, 1.8
EDGE050	Radial	190	3.52	-26.24	-62.66	N/A	29.76	20.00	-9.76	Т3	1.6, 2.6

Table 8-15 Raw Data Results for HSPA (OTT VoIP)

Mode	Orientation	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011 Rating	Test Coordinates
HSPA V	Axial	4183	11.29	-47.12	-61.66	2.00	58.41	20.00	-38.41	T4	1.6, 1.8
HSPA V	Radial	4183	3.57	-49.68	-62.66	N/A	53.25	20.00	-33.25	T4	1.6, 2.6

 Table 8-16

 Raw Data Results for LTE B13 – Ant M1 (OTT VolP)

	Mode	Orientation	Bandwidth	Channel	ABM1 [dB(A/m)]	ABM2 [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates
	LTE Band 13 Radial	Avial	10MHz	23230	10.89	-40.49	-61.66	2.00	51.38	20.00	-31.38	T4	1.6. 1.8
		5MHz	23230	11.02	-42.03	-01.00	2.00	53.05	20.00	-33.05	T4	1.0, 1.0	
		10MHz	23230	3.35	-46.27	-62.66	NI/A	49.62	20.00	-29.62	T4	1.6, 2.6	
		Radiai	5MHz	23230	3.47	-47.27	-02.66	-02.00 N/	N/A	50.74	20.00	-30.74	T4

Table 8-17 Raw Data Results for NR n5 – Ant M1 + M2 (OTT VoIP)

Mode	Orientation	Bandwidth	Channel	ABM1 <sub>LTE</sub> [dB(A/m)]	ABM2 <sub>NR</sub> [dB(A/m)]	ABM2 <sub>LTE</sub> [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N <sub>NR</sub> (dB)	S+N/N <sub>NR</sub> - 3 dE (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)	C63.19-2011	Test Coordinates
NR n5	Axial	20MHz	167300	11.59	-42.52	-39.24	-61.66	N/A	54.11	51.11	20.00	-31.11	T4	1.6, 1.8
NK II5	Radial	20MHz	167300	3.65	-50.07	-47.15	-62.66	N/A	53.72	50.72	20.00	-30.72	T4	1.6, 2.6

 Table 8-18

 Raw Data Results for LTE B5 (OTT VoIP – Additional Measurements for NR)

Mode	Orientation	Bandwidth	Channel	ABM1 <sub>LTE</sub> [dB(A/m)]	ABM2 <sub>NR</sub> [dB(A/m)]	ABM2 <sub>LTE</sub> [dB(A/m)]	Ambient Noise [dB(A/m)]	Frequency Response Margin (dB)	S+N/N <sub>LTE</sub> (dB)	S+N/N <sub>NR</sub> - 3 dB (dB)	FCC Limit (dB)	Margin from FCC Limit (dB)		Test Coordinates
LTE Band	Axial	10MHz	20525	11.59	N/A	-39.24	-61.66	N/A	54.42	N/A	20.00	-34.42	T4	1.6, 1.8
5	Radial	10MHz	20525	3.65	N/A	-47.15	-62.66	IN/A	50.80	IVA	20.00	-30.80	Т4	1.6, 2.6

FCC ID: A3LSMF926B		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 27 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 27 of 56
© 2021 PCTEST		•		REV 3.5.M

8/18/2020

### II. Test Notes

#### A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- 3. Hearing Aid Mode (Phone→Settings→Other call settings→Hearing aid compatibility) was set to ON for Frequency Response compliance
- 4. Speech Signal: 3GPP2 Normal Test Signal
- 5. Bluetooth and WIFI were disabled while testing 2G/3G/4G/5G modes.
- 6. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

#### B. GSM

- 1. Power Configuration: GSM850: PCL=5;
- 2. Vocoder Configuration: EFR (GSM);

#### C. UMTS

- 1. Power Configuration: TPC= "All 1s";
- 2. Vocoder Configuration: NB AMR 4.75 kbps (UMTS);

### D. LTE FDD

- 1. Power Configuration: TPC = "Max Power"
- 2. Radio Configuration: 64QAM, 1RB, 99% RB offset
- 3. Vocoder Configuration: NB AMR 4.75kbps
- 4. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 12 with the M1 + M2 antenna configuration at 10MHz is the worst-case for both the Axial and Radial probe orientations.


### E. OTT VoIP

- 1. Vocoder Configuration: 6kbps
- 2. EDGE Configuration
  - a. MCS Index: 7
    - b. Number of TX slots: 2
- 3. HSPA Configuration:
  - a. Release: 6
  - b. 3GPP 34.121 Subtest 1
- 4. LTE FDD Configuration:
  - a. Power Configuration: TPC = "Max Power"
  - b. Radio Configuration: 64QAM, 1RB, 99% RB offset
  - c. LTE Band 13 with the M1 antenna configuration was the worst-case band from Table 6-4 and was used to test both Axial and Radial probe orientations.
  - d. The worst-case band and bandwidth combination for each probe orientation is additionally tested on the low and high channels for those combinations. LTE Band 13 with the M1 antenna configuration at 10MHz is the worst-case for both the Axial and Radial probe orientations; however, because Band 13 at 10MHz bandwidth supports only one channel, additional testing was not performed.
- 5. NR FDD Configuration
  - a. Power Configuration: TxAGC is set such that the DUT operates at max power
  - b. Radio Configuration: DFT-s-OFDM, 64QAM, 1RB, 50% RB Offset
    - i. Please refer to the Original Certification test report for more information regarding radio configuration selection
  - c. Due to equipment limitations, ABM1 measurements were not possible. Therefore, the procedure outlined in Section 6.II.3 was followed to obtain SNNR values. Additionally, Frequency Response measurements were not possible due to equipment limitations.


FCC ID: A3LSMF926B	PCTEST Houl to be pet of the internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 29 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 28 of 56
© 2021 PCTEST				REV 3.5.M

d. NR n5 with the M1 + M2 antenna configuration was the worst-case band from Table 6-5 and was used to test both Axial and Radial probe orientations. Please refer to the Original Certification test report for full evaluation.

## III. 1 kHz Vocoder Application Check

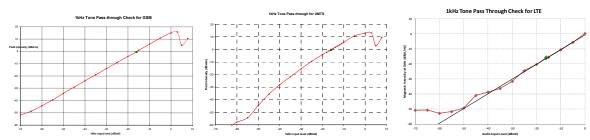

This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM, UMTS, and VoLTE over IMS. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

## IV. T-Coil Validation Test Results

 Table 8-19

 Helmholtz Coil Validation Table of Results

Item	Target	Result	Verdict
Axial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-9.917	PASS
Environmental Noise	< -58 dBA/m	-61.66	PASS
Frequency Response, from limits	> 0 dB	0.50	PASS
Radial			
Magnetic Intensity, -10 dBA/m	-10 ± 0.5 dB	-10.132	PASS
Environmental Noise	< -58 dBA/m	-62.66	PASS
Frequency Response, from limits	> 0 dB	0.70	PASS

FCC ID: A3LSMF926B	PCTEST Proved to be poet at & dimensional	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 29 of 56
© 2021 PCTEST	-	·		REV 3.5.M

## V. ABM1 Magnetic Field Distribution Scan Overlays

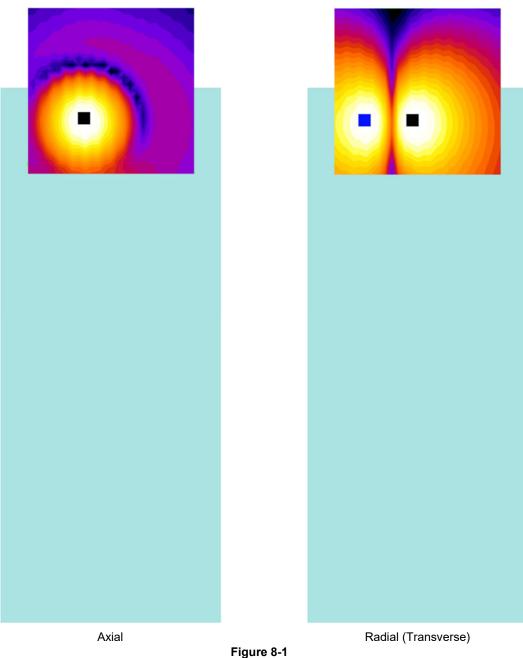


Figure 8-1 T-Coil Scan Overlay Magnetic Field Distributions

Notes:

- 1. Final measurement locations are indicated by a cursor on the contour plots. The blue cursor indicates the radial GSM Voice test location.
- 2. See Test Setup Photographs for actual WD overlay.

FCC ID: A3LSMF926B	Portest.	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 20 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 30 of 56
© 2021 PCTEST	*	· · ·		REV 3.5.M

REV 3.5.M 8/18/2020

#### MEASUREMENT UNCERTAINTY 9.

Contribution	Data +/-	Data +/-	Data Type	Probability	Divisor	Standard	Standard Uncertainty
	%	dB		distribution		uncertainty	(dB)
ABM Noise	7.0%	0.29	Std. Dev.	Normal k=1	1.00	7.0%	
RF Reflections	4.7%	0.20	Specification	Rectangular	1.73	2.7%	
Reference Signal Level	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Positioning Accuracy	10.0%	0.41	Uncertainty	Rectangular	1.73	5.8%	
Probe Coil Sensitivity	12.2%	0.50	Specification	Rectangular	1.73	7.0%	
Probe Linearity	2.4%	0.10	Std. Dev.	Normal k=1	1.00	2.4%	
Cable Loss	2.8%	0.12	Specification	Rectangular	1.73	1.6%	
Frequency Analyzer	5.0%	0.21	Specification	Rectangular	1.73	2.9%	
System Repeatability	5.0%	0.21	Std. Dev.	Normal k=1	1.00	5.0%	
WD Repeatability	9.0%	0.37	Std. Dev.	Normal k=1	1.00	9.0%	
Positioner Accuracy	1.0%	0.04	Specification	Rectangular	1.73	0.6%	
Combined standard uncertainty, uc (k=1)						17.7%	0.71
Expanded uncertainty (k=2), 95% confidence level					35.3%	1.31	
Notes:							

#### Table 9-1 **Uncortainty Estimation Table**

1. Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297. 2

All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the guality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dama 04 - 6 50
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 31 of 56
© 2021 PCTEST	•	•		REV 3.5.M

## 10. EQUIPMENT LIST

#### Table 10-1 Equipment List

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Listen	SoundConnect	Microphone Power Supply	9/24/2020	Biennial	9/24/2022	0899-PS150
RME	Fireface UC	Soundcheck Acoustic Analyzer External Audio Interface	9/29/2020	Biennial	9/29/2022	23792992
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	3/22/2021	Annual	3/22/2022	162125
Rohde & Schwarz	CMW500	Radio Communication tester	9/4/2020	Annual	9/4/2021	140144
Seekonk	NC-100	Torque Wrench (8" lb)	8/4/2020	Biennial	8/4/2022	21053
TEM		HAC Positioner	N/A		N/A	N/A
TEM		HAC System Controller with Software	N/A		N/A	N/A
TEM	Helmholtz Coil	Helmholtz Coil	9/23/2020	Biennial	9/23/2022	SBI 1052
TEM	Axial T-Coil Probe	Axial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1123
TEM	Radial T-Coil Probe	Radial T-Coil Probe	9/23/2020	Biennial	9/23/2022	TEM-1129

FCC ID: A3LSMF926B	PCTEST Proved to be poet of & othersed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 22 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 32 of 56
© 2021 PCTEST	-			REV 3.5.M

REV 3.5.M 8/18/2020

## 11. TEST DATA

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 33 of 56
© 2021 PCTEST	•	•		REV 3.5.M

8/18/2020

7/26/2021



## DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

• Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### **Noise Spectrum**

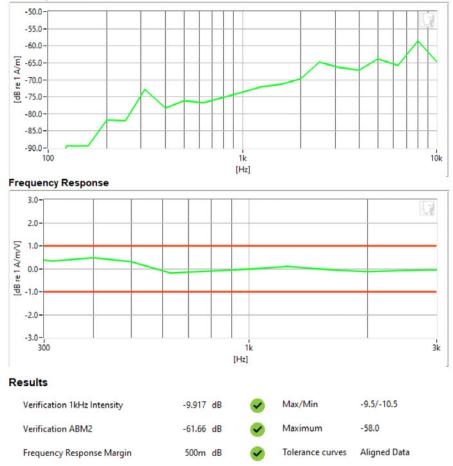

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 24 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 34 of 56
© 2021 PCTEST	•	•		REV 3.5.M

7/26/2021



DUT: HH Coil – SN: SBI 1052 Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

#### **Noise Spectrum**

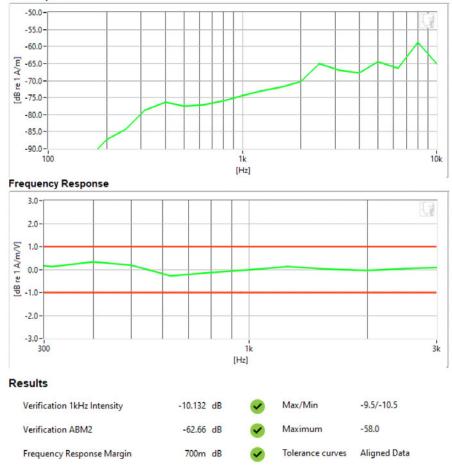

FCC ID: A3LSMF926B		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 25 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 35 of 56
© 2021 PCTEST				REV 3.5.M

7/30/2021



DUT: A3LSMF926B Type: Portable Handset

Serial: 0528M


#### Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

#### Test Configuration:

- Mode: GSM850
- Channel: 128
- Speech Signal: 3GPP2 Normal Test Signal
- Antenna Config.: M1

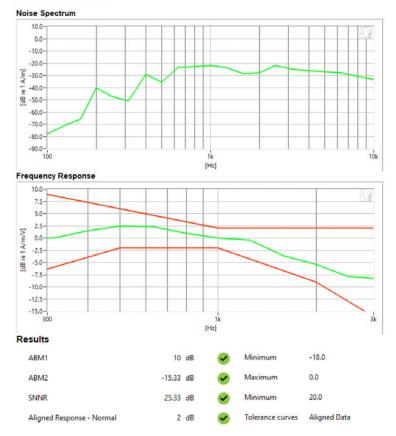

#### PCTEST 2021

FCC ID: A3LSMF926B	PCTEST Proved to be poet at & dimensional	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Daga 26 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 36 of 56
© 2021 PCTEST	-			REV 3.5.M



DUT: A3LSMF926B Type: Portable Handset Serial: 0528M


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

**Test Configuration:** 

- Mode: UMTS V
- Channel: 4183
- Speech Signal: 3GPP2 Normal Test Signal
- Antenna Config.: M1

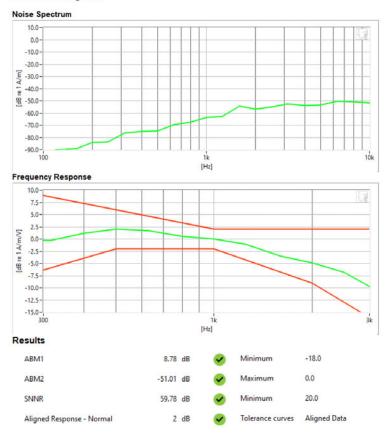

FCC ID: A3LSMF926B		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 27 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 37 of 56
© 2021 PCTEST				REV 3.5.M

8/18/2020



DUT: A3LSMF926B Type: Portable Handset Serial: 0528M


Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

# Test Configuration:

- Mode: LTE FDD Band 12
- Bandwidth: 10MHz
- Channel: 23095
- Speech Signal: 3GPP2 Normal Test Signal
- Antenna Config.: M1+M2

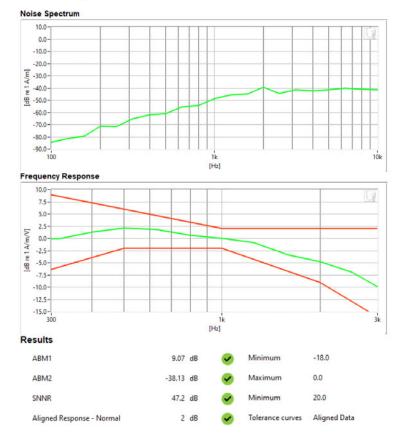

 
 FCC ID: A3LSMF926B
 PCTEST
 HAC (T-COIL) TEST REPORT
 Approved by: Quality Manager

 Filename: 1M2106280075-06.A3L
 Test Dates: 7/26/2021 - 7/30/2021
 DUT Type: Portable Handset
 Page 38 of 56

 © 2021 PCTEST
 REV 3.5.M

8/18/2020



DUT: A3LSMF926B Type: Portable Handset

Serial: 0528M


# Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

# **Test Configuration:**

- VoIP Application: Google Duo
- Mode: EDGE850
- Channel: 190
- Speech Signal: 3GPP2 Normal Test Signal
- Antenna Config.: M1

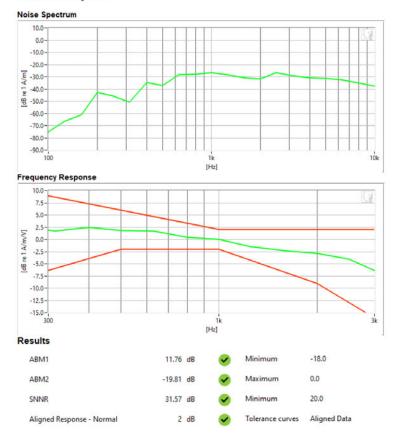

FCC ID: A3LSMF926B	PCTEST Proved to be poet of & othersed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 20 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 39 of 56
© 2021 PCTEST	•			REV 3.5.M

REV 3.5.M 8/18/2020



DUT: A3LSMF926B Type: Portable Handset

Serial: 0528M

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

Test Configuration:

- Mode: GSM850
- Channel: 190
- Antenna Config.: M1 + M2

#### Noise Spectrum



#### PCTEST 2021

FCC ID: A3LSMF926B	POTEST Provid to be port of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 40 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 40 of 56
© 2021 PCTEST	•			REV 3.5.M



DUT: A3LSMF926B

Type: Portable Handset Serial: 0528M

Measurement Standard: ANSI C63.19-2011

#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020


# Test Configuration:

- Mode: UMTS V
- Channel: 4183
- Antenna Config.: M1

#### Noise Spectrum

ABM2

SNNR

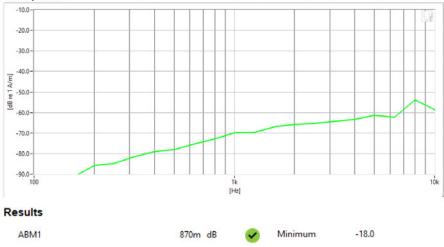

-59.88 dB

60.74 dB

Maximum

Minimum

0

20

FCC ID: A3LSMF926B	Road to be part of @ united	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 41 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 41 of 56
© 2021 PCTEST		·		REV 3.5.M

8/18/2020

7/29/2021



DUT: A3LSMF926B

Type: Portable Handset Serial: 0528M

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

# Test Configuration:

- Mode: LTE FDD Band 12
- · Bandwidth: 10MHz
- Channel: 23095
- Antenna Config.: M1+M2

#### Noise Spectrum

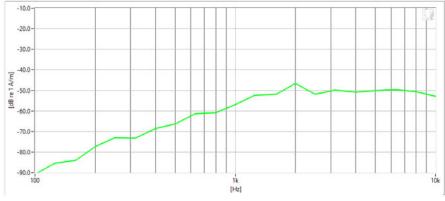

#### Results

ABM1	840m	dB	<	Minimum	-18.0
ABM2	-45.52	dB	<	Maximum	0.0
SNNR	46.35	dB	<ul> <li>Image: A start of the start of</li></ul>	Minimum	20.0

FCC ID: A3LSMF926B	Portest Prod to be pet of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 42 of 56
© 2021 PCTEST				REV 3.5.M



DUT: A3LSMF926B

Type: Portable Handset Serial: 0528M

Measurement Standard: ANSI C63.19-2011


#### Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020

# Test Configuration:

- VoIP Application: Google Duo
- Mode: EDGE850
- Channel: 190
- Antenna Config.: M1

#### Noise Spectrum

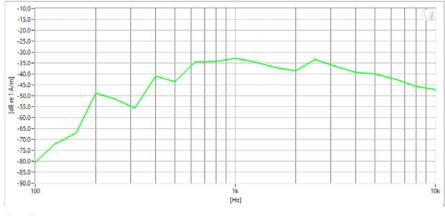



ABM1	3.52	dB	•	Minimum	-18.0
ABM2	-26.24	dB	<	Maximum	0.0
SNNR	29.76	dB	~	Minimum	20.0

FCC ID: A3LSMF926B		HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 42 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 43 of 56
© 2021 PCTEST	•	·		REV 3.5.M

# 12. CALIBRATION CERTIFICATES


FCC ID: A3LSMF926B	PCTEST Proved to be poet of @ interset	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 44 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 44 of 56
© 2021 PCTEST	•	•		REV 3.5.M

REV 3.5.M 8/18/2020

	West C	aldwell Ca	alibration l	Laborator	ries Inc.	
	Certifi	cate	of Co	nfori	mance	
			for			1000 1000 1000 1000 1000 1000
100			AL T COIL PROB			192 .000
		Manufactured b Model No: Serial No:	.,	CONSULTING L T COIL PROB 1123	E	
		Calibration Rec				
			Submitted By:			
		Customer:	ANDREW HAR	WELL		
200 · · · · · ·						
		Company: Address:	PCTEST ENGIN 6660-B DOBBIN COLUMBIA	ROAD	MD 21045	
	The subject instrument SI through the National physical constants. This its return to the submitt West Caldwell Calibrati	Institute of Stand document certifie er.	ards and Technolo s that the instrume	gy or to accepted	values of natural	
666 666 80					10/13/0000	11
	Upon receipt for Calibra	,	ent was found to be	2:	10/10/2020	
20 20 1 20 20 1	Within	(X)				
	tolerance of the indicate The information supplie for ALL given specificat acceptance limit, L is ma ncludes but not limited 2.Manufacturer's tolera uncertainties, 3. Test un imitations. The decision	d relates to the ca tions and standard anufacturer specif to:1. Measured va nce is too small co certainty ratio doo	librated item listed ls fall under the dec ications and U95 is lue does not meet r mpared to calibrat es not meet the 4:1	above and statme cision rule: A=(L- confidence level of nanufacturer's to ion and measurm ratio due to test in	(U95)), where A is of 95% at k=2. This lerance, ent capability nstrumentation	
r r	West Caldwell Calibrati requirements, ISO 1001 and ISO 17025					
Ν	Note: With this Certificate, R	eport of Calibration is	included.	Approved by	y:	
(	Calibration Date:	23-Sep-20		,	mes Zhu ty Manager	
() (	Certificate No:	31288 - 2			C 17025:2017	
	A Doc. #1051 Rev. 3.0 5/29/20		tificate Page 1 of 1			r an
		st Caldwell		X.	4 🔼	
	mpromised calibration L State Route 96, Victor, NY		, Inc.	Contraction of the International State	REDITED .ab. Cert. # 1533.01	

FCC ID: A3LSMF926B	PCTEST Provide to be port of @ element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 45 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 45 of 56
© 2021 PCTEST				REV 3.5.M

HCATEMC\_TEM-1123\_Sep-23-2020

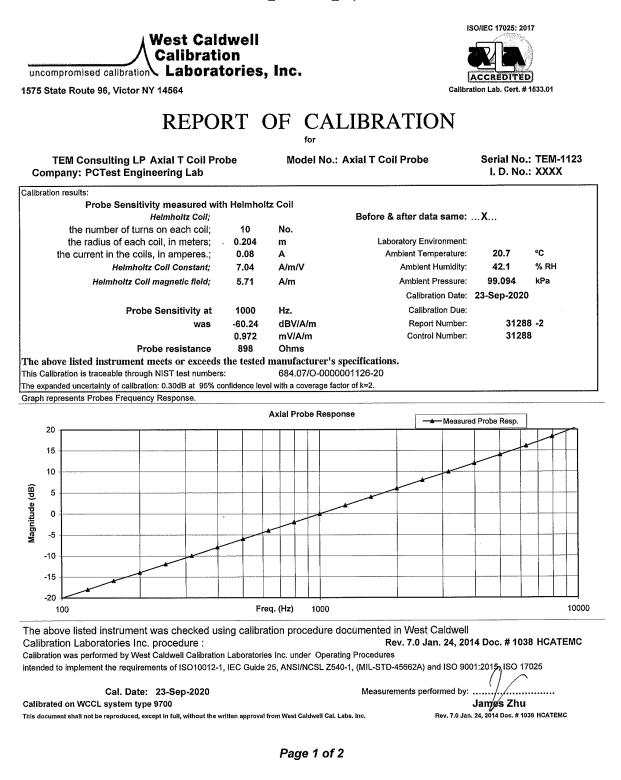

FCC ID: A3LSMF926B	PCTEST Proved to be post of @ diversed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo 46 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 46 of 56
© 2021 PCTEST	·	·		REV 3.5.M

# HCATEMC\_TEM-1123\_Sep-23-2020

# West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab Model No.: Axial T Coil Probe

Serial No.: TEM-1123

Test	Function	Tolera	Tolerance		Measured values		
				Before	Out	Remarks	
1.0	Probe Sensitivity at	1000 Hz.	dBV/A/m	-60.24			
		· · ·	dB				
2.0	Probe Level Linearity		6	6.03			
		Ref. (0 dB)	0	0.00			
			-6	-6.03			
			-12	-12.05			
	······································		Hz				
3.0	Probe Frequency Response		100	-20.0			
			126	-18.0			
			158	-15.9			
			200	-14.0			
			251	-12.0			
			316	-10.0			
			398	-8.0			
			501	-6.0			
			631	-4.0			
			794	-2.0			
		Ref. (0 dB)	1000	0.0			
			1259	2.0			
			1585	4.0			
			1995	6.0			
			2512	8.0			
			3162	10.0			
			3981	12.0			
			5012	14.0			
			6310	16.1			
			7943	18.3			
			10000	20.7			

Instruments u	sed for calibration:		Date of Cal.	Traceablity No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	,610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

# Page 2 of 2

FCC ID: A3LSMF926B	PCTEST Provid to be part of & minutesed	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 47 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 47 of 56
© 2021 PCTEST	-			REV 3.5.M

	West C	aldwell C	alibrat	ion Laborato	ories Inc.	
	Certif	icate	of (	Confor	mance	
						1000
		RAI Manufactured Model No: Serial No: Calibration Re		L PROBE TEM CONSULTING RADIAL T COIL PF TEM-1129 31288		
			Submitted	Bv:		
		Customer:		W HARWELL		10000
		Company: Address:	PCTEST	TENGINEERING LAI DOBBIN ROAD	3 MD 21045	
					tandards traceable to the	100
A CONTRACTOR	SI through the Nationa physical constants. Thi its return to the submi West Caldwell Calibra	s document certif tter.	ies that the i	nstrument met the follo	owing specification upon $1c$	
	Upon receipt for Calib	ration, the instru	ment was fou	ind to be:	10/13/2020	100 - 0 - 000 - 0 - 000 - 0
	Within	(X)				
	tolerance of the indicat The information suppl for ALL given specific acceptance limit, L is n includes but not limite 2.Manufacturer's tolen uncertainties, 3. Test u limitations. The decisio	ied relates to the c ations and standa nanufacturer spec d to:1. Measured ance is too small o ncertainty ratio d	calibrated ite rds fall unde cifications an value does n compared to loes not mee	em listed above and state of the decision rule: A= d U95 is confidence lev ot meet manufacturer's calibration and measu t the 4:1 ratio due to test	tment of conformance (L-(U95)), where A is rel of 95% at k=2. This s tolerance, rment capability st instrumentation	
	West Caldwell Calibra	tion Laboratories	' calibration	control system meets t		
	Note: With this Certificate,	Report of Calibration	is included.	Approve	d by:	
	Calibration Date:	23-Sep-20			James Zhu	
1400 - 100 1000 - 100 1000 - 100	Contificante Mar	31288 - 1		Qu	ality Manager	2 0000 2 00000 2 0000 2 00000000
You want	Certificate No: QA Doc. #1051 Rev. 3.0 5/29/20		ertificate Pag		/IEC 17025:2017	
		est Caldwel				
	C	alibration			<u>Zí s</u>	
	uncompromised calibration		s, Inc.	760494	CCREDITED	
	1575 State Route 96, Victor, N	1 14004, U.S.A.	TOTAL CONT		n Lab. Cert. # 1533.01	

FCC ID: A3LSMF926B	PCTEST Houd to be part of @ stormer	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 49 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 48 of 56
© 2021 PCTEST	*	·		REV 3.5.M

#### HCRTEMC\_TEM-1129\_Sep-23-2020

West Caldwell Calibration uncompromised calibration Laboratories, Inc. ACCREDITED 1575 State Route 96, Victor NY 14564 Calibration Lab. Cert. # 1533.01 REPORT OF CALIBRATION Serial No.: TEM-1129 **TEM Consulting LP Radial T Coil Probe** Model No.: Radial T Coil Probe Company: PCTest Engineering Lab I. D. No.: XXXX Calibration results: Probe Sensitivity measured with Helmholtz Coil Helmholtz Coil: Before & after data same: ... X ... the number of turns on each coil; 10 No. the radius of each coil, in meters; 0.204 m Laboratory Environment: Ambient Temperature: °C the current in the coils, in amperes.; 0.08 Α 20.7 Helmholtz Coil Constant; 7.04 A/m/V Ambient Humidity: 42.1 % RH Helmholtz Coil magnetic field; 5.70 A/m Ambient Pressure: 99.094 kPa Calibration Date: 23-Sep-2020 Probe Sensitivity at 1000 Hz. Re-calibration Due: -60.37 dBV/A/m Report Number: 31288 -1 was 31288 mV/A/m 0.959 Control Number: Probe resistance Ohms 897 The above listed instrument meets or exceeds the tested manufacturer's specifications. This Calibration is traceable through NIST test numbers: 684.07/O-0000001126-20 The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. Graph represents Probes Frequency Response. **Radial Probe Response** - Measured Probe Resp 20 15 10 (gp 5 Magnitude 0 -5

-15 -20 Freq. (Hz) 10000 100 1000 The above listed instrument was checked using calibration procedure documented in West Caldwell Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC Calibration Laboratories Inc. procedure : Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17025 11 Cal. Date: 23-Sep-2020 Measurements performed by: . . . . . . . . . . . . . . . . Calibrated on WCCL system type 9700 James Zhu This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc. Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

-10

# Page 1 of 2

FCC ID: A3LSMF926B	PCTEST Provid to be port of & element	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dage 40 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 49 of 56
© 2021 PCTEST	•	•		REV 3.5.M

© 2021 PCTEST All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTEST.COM.

ISO/IEC 17025: 2017

# HCRTEMC\_TEM-1129\_Sep-23-2020

# West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

# Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab Model No.: Radial T Coil Probe

Serial No.: TEM-1129

Measured values		
Out		
	, , , , , , , , , , , , , , , , ,	
	<u> </u>	
	1	
1		

Instrument	s used for calibration:		Date of Cal.	Traceability No.	Due Date
HP	34401A	S/N US360641	2-Jul-2020	,610119	2-Jul-2021
HP	34401A	S/N US361024	2-Jul-2020	,610119	2-Jul-2021
HP	33120A	S/N US360437	2-Jul-2020	.610119	2-Jul-2021
B&K	2133	S/N 1583254	1-Jul-2020	684.07/O-0000001126-20	1-Jul-2021

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

# Page 2 of 2

FCC ID: A3LSMF926B	PCTEST Proved to be poet at & conserved	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 50 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 50 of 56
© 2021 PCTEST	•			REV 3.5.M

# 13. CONCLUSION

The measurements indicate that GSM850, UMTS B5, LTE Bands 12/17/13/5/26, and NR n5 modes for the referenced wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual reconstruction.

FCC ID: A3LSMF926B	PCTEST Proof to be pert of the internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Demo E1 of E6
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 51 of 56
© 2021 PCTEST	•			REV 3.5.M

REV 3.5.M 8/18/2020

# 14. REFERENCES

- 1. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- 2. FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- 3. FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices," IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, " U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- EHIMA GSM Project, Development phase, Project Report (1<sup>st</sup> part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.
- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7<sup>th</sup> International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983

FCC ID: A3LSMF926B	PCTEST Proof to be perfect @ internet	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 52 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 52 of 56
© 2021 PCTEST		·		REV 3.5.M

- Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

FCC ID: A3LSMF926B	PCTEST Proved to be poet at & dimensional	HAC (T-COIL) TEST REPORT	SAMSUNG	Approved by: Quality Manager
Filename:	Test Dates:	DUT Type:		Dega 52 of 56
1M2106280075-06.A3L	7/26/2021 - 7/30/2021	Portable Handset		Page 53 of 56
© 2021 PCTEST		•		REV 3.5.M

8/18/2020