

PCTEST

7185 Oakland Mills Road, Columbia, MD 21046 USA Tel. 410.290.6652 / Fax 410.290.6654 http://www.pctest.com



HEARING AID COMPATIBILITY

Applicant Name:

Samsung Electronics Co., Ltd. 129, Samsung-ro, Maetan dong, Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea Date of Testing: 8/2/2021-08/3/2021 Test Site/Location: PCTEST, Columbia, MD, USA

Test Report Serial No.: 1M2108050089-02.A3L (Rev 1)

Date of Issue: 8/7/2021

FCC ID: A3LSMF926B

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

Scope of Test: Audio Band Magnetic Testing (T-Coil)

Application Type: Class II Permissive Change

FCC Rule Part(s): CFR §20.19(b)
HAC Standard: ANSI C63.19-2011

285076 D01 HAC Guidance v05

285076 D02 T-Coil testing for CMRS IP v03

DUT Type:Portable HandsetModel:SM-F926B/DSAdditional Model(s):SM-F926B

Test Device Serial No.: Pre-Production Sample [S/N: 0528M]

Class II Permissive Change(s): See FCC Change Document

C63.19-2011 HAC Category: T3 (SIGNAL TO NOISE CATEGORY; Flat Configuration

only)

Note: This revised Test Report supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

This report and category only pertain to the flat configuration supported by this wireless portable device. The overall category rating of the device is determined by the lowest rating obtained over all air interfaces supported by the device. This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and has been tested in accordance with the specified measurement procedures. Test results reported herein relate only to the item(s) tested. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report. North American Bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Randy Ortanez President





| FCC ID: A3LSMF926B | PCTEST: Proud to be port of selected | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--------------------------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 1 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 1 of 43 |

TABLE OF CONTENTS

| 1. | INTRODUCTION | 3 |
|-----|--|----|
| 2. | DUT DESCRIPTION | 4 |
| 3. | ANSI C63.19-2011 PERFORMANCE CATEGORIES | 6 |
| 4. | METHOD OF MEASUREMENT | 8 |
| 5. | OTT VOIP TEST SYSTEM AND DUT CONFIGURATION | 17 |
| 6. | T-COIL TEST SUMMARY | 18 |
| 7. | MEASUREMENT UNCERTAINTY | 22 |
| 8. | EQUIPMENT LIST | 23 |
| 9. | TEST DATA | 24 |
| 10. | CALIBRATION CERTIFICATES | 29 |
| 11. | CONCLUSION | 36 |
| 12. | REFERENCES | 37 |
| 13. | TEST SETUP PHOTOGRAPHS | 39 |

| FCC ID: A3LSMF926B | PCTEST: Proud to be post of @ element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|---------------------------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 2 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 2 of 43 |

INTRODUCTION

On July 10, 2003, the Federal Communications Commission (FCC) adopted new rules requiring wireless manufacturers and service providers to provide digital wireless phones that are compatible with hearing aids. The FCC has modified the exemption for wireless phones under the Hearing Aid Compatibility Act of 1998 (HAC Act) in WT Docket 01-309 RM-86581 to extend the benefits of wireless telecommunications to individuals with hearing disabilities. These benefits encompass business, social and emergency communications, which increase the value of the wireless network for everyone. An estimated more than 10% of the population in the United States show signs of hearing impairment and of that fraction, almost 80% use hearing aids. Approximately 500 million people worldwide and 30 million people in the United States suffer from hearing loss.

Compatibility Tests Involved:

The standard calls for wireless communications devices to be measured for:

- RF Electric-field emissions
- T-coil mode, magnetic-signal strength in the audio band
- T-coil mode, magnetic-signal frequency response through the audio band
- T-coil mode, magnetic-signal and noise articulation index

The hearing aid must be measured for:

- RF immunity in microphone mode
- RF immunity in T-coil mode

In the following tests and results, this report includes the evaluation for a wireless communications device.



Figure 1-1 Hearing Aid in-vitu

¹ FCC Rule & Order, WT Docket 01-309 RM-8658

| FCC ID: A3LSMF926B | PCTEST' Troud to be post of the elements | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 3 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 3 01 43 |

© 2021 PCTEST

DUT DESCRIPTION 2.



FCC ID: A3LSMF926B

Applicant: Samsung Electronics Co., Ltd.

129, Samsung-ro, Maetan dong,

Yeongtong-gu, Suwon-si Gyeonggi-do 16677, Korea

Model: SM-F926B/DS Additional Model(s): SM-F926B Serial Number: 0528M HW Version: REV1.0

SW Version: F926BXXU1AUGD Antenna: Internal Antenna DUT Type: Portable Handset

I. **Flat Configuration Testing**

This device supports held to ear scenarios in both the folded (closed) and flat (open) configurations. The overall worst case configuration from the original certification test report (Report S/N: 1M2104190044-22-R1.A3L) was additionally evaluated in the flat (open) configuration for this report.

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of a reserved | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 4 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 4 of 43 |

Table 2-1 A3LSMF926B HAC Air Interfaces

| | | | | SLSWF9266 HAC All Interface | | |
|--|---|--|------------------|--------------------------------|--|---|
| Air-Interface | Band (MHz) | Type Transport | HAC Tested | Simultaneous But Not Tested | Name of Voice Service | Audio Codec Evaluated |
| | 850 | VO | Yes ³ | Yes: WIFI or BT | CMRS Voice ¹ | EFR |
| GSM | 1900 | *** | No ³ | 163. WIIT OF B1 | CIVILO VOICE | LIN |
| | GPRS/EDGE | VD | Yes ³ | Yes: WIFI or BT | Google Duo ² | OPUS |
| | 850 | | | | | |
| UMTS | 1700 | VD | No ³ | Yes: WIFI or BT | CMRS Voice ¹ | NB AMR, WB AMR |
| 05 | 1900 | | | | | |
| | HSPA | VD | No ³ | Yes: WIFI or BT | Google Duo ² | OPUS |
| | 700 (B12) | | | | | |
| | 700 (B17) | | | | | |
| | 780 (B13) | | | | | |
| | 850 (B5) | | | | | Volte: NB AMR, WB AMR, EVS |
| LTE (FDD) | 850 (B26) VD No ³ Yes: NR, WIFI or BT VolTE ¹ , Google Du | VoLTE ¹ , Google Duo ² | Google Duo: OPUS | | | |
| | 1700 (B4) | | | | | - |
| | 1700 (B66) | | | | | |
| | 1900 (B2) | | | | | |
| | 1900 (B25) | | | | | <u> </u> |
| LTE (TDD) | 2599 (B41) | VD | No ³ | Yes: NR, WIFI or BT | VoLTE ¹ , Google Duo ² | VoLTE: NB AMR, WB AMR, EVS Google Duo: OPUS |
| NR (FDD) | 850 (n5) | VD | No ³ | Yes: LTE, WIFI or BT | Google Duo ² | OPUS |
| NK (FDD) | 1700 (n66) | VD | NO | fes. LIE, WIFI OF BI | Google Duo- | OPOS |
| | 2450 | | | | | |
| | 5200 (U-NII 1) | | | | | |
| | 5300 (U-NII 2A) | | | | | |
| | 5500 (U-NII 2C) | | | | | VOWIEL NO AME IND AME EVE |
| WIFI | 5800 (U-NII 3) | VD | No ³ | Yes: GSM, UMTS, LTE, or NR | VoWIFI², Google Duo² | VoWIFI: NB AMR, WB AMR, EVS Google Duo: OPUS |
| | 6175 (U-NII 5) | | | | | |
| | 6475 (U-NII 6) | | | | | |
| | 6700 (U-NII 7) | | | | | |
| | 7000 (U-NII 8) | | | | | |
| BT | 2450 | DT | No | Yes: GSM, UMTS, LTE, or NR | N/A | N/A |
| Notes: 1. Reference level in accordance with 7.4.2.1 of ANSI C63.19-2011 and July 2012 C63 VoLTE Interpretation. 2. Reference level is -20dBm0 in accordance with FCC KDB 285076 D02 3. This report only pertains to the GSM850 mode. For full data, please refer to the Original Certification Test Report (Report S/N: 1M2104190044-22-R1.A3L). | | | | | | |

| FCC ID: A3LSMF926B | PCTEST* Provid to be port of the element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo F of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 5 of 43 |

3. ANSI C63.19-2011 PERFORMANCE CATEGORIES

I. **MAGNETIC COUPLING**

Axial and Radial Field Intensity

All orientations of the magnetic field, in the axial and radial position along the measurement plane shall be ≥ -18 dB(A/m) at 1 kHz in a 1/3 octave band filter per §8.3.1.

Frequency Response

The frequency response of the axial component of the magnetic field shall follow the response curve specified in EIA RS-504-1983, over the frequency range 300 Hz - 3000 Hz per §8.3.2.


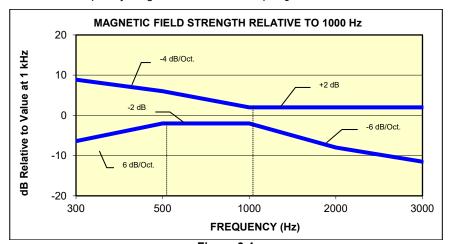


Figure 3-1 Magnetic field frequency response for Wireless Devices with an axial field ≤-15 dB(A/m) at 1 kHz

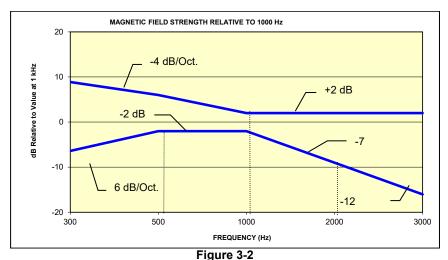

Magnetic Field frequency response for wireless devices with an axial field that exceeds -15 dB(A/m) at 1 kHz

| FCC ID: A3LSMF926B | PCTEST . Proud to be port of @ element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 6 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | rage 6 01 43 |

© 2021 PCTEST REV 3.5.M

Signal Quality

The table below provides the signal quality requirement for the intended audio magnetic signal from a wireless device. Only the RF immunity of the hearing aid is measured in T-coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. The only criterion that can be measured is the RF immunity in T-coil mode. This is measured using the same procedure as the audio coupling mode at the same levels.

The signal quality of the axial and radial components of the magnetic field was used to determine the T-coil mode category.

| Cotomomi | Telephone RF Parameters | | |
|--|--|--|--|
| Category | Wireless Device Signal Quality [(Signal + Noise)-to-noise ratio in dB] | | |
| T1 | 0 to 10 dB | | |
| T2 | 10 to 20 dB | | |
| Т3 | 20 to 30 dB | | |
| T4 | > 30 dB | | |
| Table 3-1 Magnetic Coupling Parameters | | | |

Note: The FCC limit for SNNR is 20dB and the test data margins will indicate a margin from the FCC limit for compliance.

| FCC ID: A3LSMF926B | PCTEST* Proud to be post of @ interest | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 7 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 7 of 43 |

4. METHOD OF MEASUREMENT

I. Test Setup

The equipment was connected as shown in an acoustic/RF hemi-anechoic chamber:

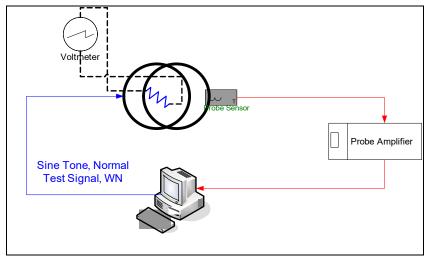


Figure 4-1 Validation Setup with Helmholtz Coil

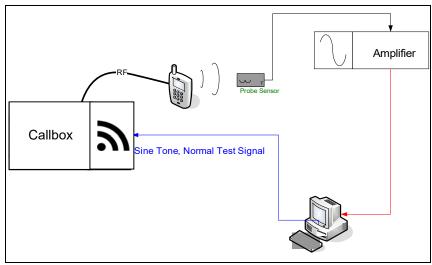


Figure 4-2 T-Coil Test Setup

| FCC ID: A3LSMF926B | PCTEST' Proud to be port of ® simmed | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--------------------------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 0 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 8 of 43 |

II. Scanning Mechanism

Manufacturer: TEM

Accuracy: ± 0.83 cm/meter

Minimum Step Size: 0.1 mm

Maximum speed 6.1 cm/sec

Line Voltage: 115 VAC

Line Frequency: 60 Hz

Material Composite: Delrin (Acetal)

Data Control: Parallel Port

Dynamic Range (X-Y-Z): 45 x 31.75 x 47 cm

Dimensions: 36" x 25" x 38" Operating Area: 36" x 49" x 55"

Reflections: < -20 dB (in anechoic chamber)




Figure 4-3 RF Near-Field Scanner

III. 3GPP2 Normal Test Signal (Speech)

Manufacturer: 3GPP2 (TIA 1042 §3.3.1)

Modified-IRS weighted, multi-talker speech signal, 4 Male and 4 Female

Stimulus Type: speakers (alternating)

Single Sample Duration: 51.62 seconds

Activity Level: 77.4%




Figure 4-4
Temporal Characteristic of Normal Test Signal

| FCC ID: A3LSMF926B | PCTEST* Proud to be part of the relevance | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|---|--------------------------|---------|------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 9 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 9 01 43 |

ABM1 Measurement Block Diagram:



ABM2 Measurement Block Diagram:



Figure 4-5 Magnetic Measurement Processing Steps

IV. **Test Procedure**

- 1. Ambient Noise Check per C63.19 §7.3.1
 - Ambient interference was monitored using a Real-Time Analyzer between 100-10,000 Hz with 1/3 octave filtering.
 - "A-weighting" and Half-Band Integration was applied to the measurements.
 - Since this measurement was measured in the same method as ABM2 measurements, this level was verified to be more than 10 dB below the lowest measurement signal (which is the highest ABM2 measurement for a T4 WD). Therefore the maximum noise level for a T4 WD with an ABM1 = -18 dBA/m is:

- 2. Measurement System Validation (See Figure 4-1)
 - The measurement system including the probe, pre-amplifier and acquisition system were validated as an entire system to ensure the reliability of test measurements.
 - ABM1 Validation

The magnetic field at the center of the Helmholtz coil is given by the equation (per C63.19 Annex D.10.1):

$$H_c = \frac{NI}{r\sqrt{1.25^3}} = \frac{N(\frac{V}{R})}{r\sqrt{1.25^3}}$$

H_c = magnetic field strength in amperes per meter

N = number of turns per coil For the Helmholtz Coil, N=20; r=0.13m; R=10.193 Ω and using V=29mV:

Coil, N=20; r=0.13m; R=10.193Ω and using V=29mV:
$$H_c = \frac{20 \cdot (\frac{0.029}{10.193})}{0.13 \cdot \sqrt{1.25^3}} = 0.316 \, A / m \approx -10 \, dB (A / m)$$

Therefore a pure tone of 1kHz was applied into the coils such that 29mV was observed across the resistor. The voltmeter used for measurement was verified to be capable of measurements in the audio band range. This theoretically generates an expected field of -10 dB(A/m) in the center of the Helmholtz coil which was used to validate the probe measurement at -10dB(A/m). This was verified to be within ± 0.5 dB of the -10dB(A/m) value (see Page 20).

| FCC ID: A3LSMF926B | PCTEST* Provid to be port of the element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 10 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 10 of 43 |

Frequency Response Validation The frequency response through the Helmholtz Coil was verified to be within 0.5 dB relative to 1kHz, between 300 – 3000 Hz using the Normal signal as shown below:




Figure 4-6 Frequency Response Validation

ABM2 Measurement Validation

WD noise measurements are filtered with A-weighting and Half-Band Integration over a frequency range of 100Hz - 10kHz to process ABM2 measurements. Below is the verification of the system processing A-weighting and Half-Band integration between system input to output within 0.5 dB of the theoretical result:

> Table 4-1 **ABM2 Frequency Response Validation**

| | HBI, A - | HBI, A - | |
|--------|--------------|--------------|---------|
| f (Hz) | Measured | Theoretical | dB Var. |
| | (dB re 1kHz) | (dB re 1kHz) | |
| 100 | -16.180 | -16.170 | -0.010 |
| 125 | -13.257 | -13.250 | -0.007 |
| 160 | -10.347 | -10.340 | -0.007 |
| 200 | -8.017 | -8.010 | -0.007 |
| 250 | -5.925 | -5.920 | -0.005 |
| 315 | -4.045 | -4.040 | -0.005 |
| 400 | -2.405 | -2.400 | -0.005 |
| 500 | -1.212 | -1.210 | -0.002 |
| 630 | -0.349 | -0.350 | 0.001 |
| 800 | 0.071 | 0.070 | 0.001 |
| 1000 | 0.000 | 0.000 | 0.000 |
| 1250 | -0.503 | -0.500 | -0.003 |
| 1600 | -1.513 | -1.510 | -0.003 |
| 2000 | -2.778 | -2.780 | 0.002 |
| 2500 | -4.316 | -4.320 | 0.004 |
| 3150 | -6.166 | -6.170 | 0.004 |
| 4000 | -8.322 | -8.330 | 0.008 |
| 5000 | -10.573 | -10.590 | 0.017 |
| 6300 | -13.178 | -13.200 | 0.022 |
| 8000 | -16.241 | -16.270 | 0.029 |
| 10000 | -19.495 | -19.520 | 0.025 |

| FCC ID: A3LSMF926B | PCTEST: Proud to be port of a reserved | HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 11 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 11 of 43 |




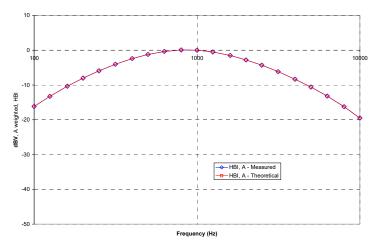


Figure 4-7
ABM2 Frequency Response Validation

The ABM2 result is a power sum from 100Hz to 10kHz with half-band integration and A-weighting. To verify the power sum measurement, a power sum over the full band was measured and verified to track with the source level (See Figure 4-8). Therefore the setup in this step was used to verify the power sum post-processing for ABM2 measurements. See below block diagram:

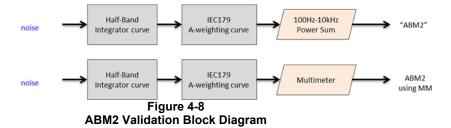

The power summed output results for a known input were compared to the multi-meter results to verify any deviation in the post-processing implemented with the power-sum.

Table 4-2 ABM2 Power Sum Validation

| WN Input (dBV) | Power Sum (dBV) | Multimeter-Full (dBV) | Dev (dB) |
|-------------------|--------------------|--------------------------|----------|
| -60 | -60.36 | -60.2 | 0.16 |
| -50 | -50.19 | -50.13 | 0.06 |
| -40 | -40.14 | -40.03 | 0.11 |
| -30 | -30.13 | -30.01 | 0.12 |
| -20 | -20.12 | -20 | 0.12 |
| -10 | -10.14 | -10 | 0.14 |

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of a named | HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|-----------------------------|-------------------------------------|--------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 12 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | raye 12 01 43 |



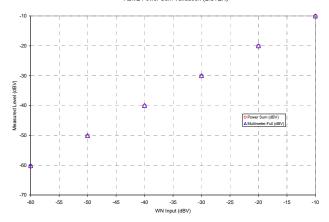


Figure 4-9 **ABM2 Power Sum Validation**

3. Measurement Test Setup

- a. Fine scan above the WD (TEM)
 - i. A multitone signal was applied to the handset such that the phone acoustic output was stable within 1dB over the probe settling time and with the acoustic output level at the C63.19 specified levels (below). The measurement step size was in 2 mm increments at a distance of 10 mm between the surface of the wireless device as shown below (note that in Figure 4-11, the grid is not to scale but merely a graphical representation of the coordinate system in use):




Figure 4-10 **Measurement Distance**




Figure 4-11 **Measurement Grid**

- ii. After scanning, the planar field maximum point was determined. The position of the probe was moved to this location to setup the test using the SoundCheck system.
- These steps were repeated for all T-coil orientations (axial and radial) per Figure 4-13 after a T-coil orientation was fully measured with the SoundCheck system.
- b. Speech Signal Setup to Base Station Simulator
 - i. C63.19 Table 7-1 states audio reference input levels for various technologies:

| Standard | Technology | Input Level (dBm0) |
|--------------------|---------------------|-----------------------|
| TIA/EIA/IS-2000 | CDMA | -18 |
| J-STD-007 | GSM (217) | -16 |
| T1/T1P1/3GPP | UMTS (WCDMA) | -16 |
| iDEN TM | TDMA (22 and 11 Hz) | -18 |

- ii. See Section 0 for more information regarding CMW500 audio level settings for Voice Over LTE (VoLTE).
- iii. See Section 5 for more information regarding audio level settings for Over-The-Top (OTT) Voice Over IP (VoIP) Testing.

| FCC ID: A3LSMF926B | POTEST* Proud to be post of @ elements | HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 12 of 12 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 13 of 43 |

- c. Real-Time Analyzer (RTA)
 - i. The Real-Time Analyzer was configured to analyze measurements using 1/3 Octave band weiahted filterina.
- WD Radio Configuration Selection
 - i. The device was chosen to be tested in the worst-case ABM2 condition (See Section 7 for more information regarding worst-case configurations for UMTS. LTE configuration information can be found in Section 0 and 5. NR configuration information can be found in Section 5.)
 - ii. Supported GSM vocoders were investigated for the worst-case ABM2 condition. GSM-EFR was deemed the worst-case condition for the GSM air interface.

4. Signal Quality Data Analysis

- a. Narrow-band Magnetic Intensity
 - i. The standard specifies a 1kHz 1/3 octave band minimum field intensity for a sine tone. The ABM1 measurements were evaluated at 1kHz with 1/3 octave band filtering over an averaged period of 10 seconds.

Frequency Response

- The appropriate frequency response curve was measured to curves in Figure 3-1 or Figure 3-2 between 300 - 3000 Hz using digital linear averaging (limit lines chosen according to measurement found in step 4a). A linear average over 3x the length of the artificial voice signal (3x sampling) was performed. A 10 second delay was configured in the measurement process of the stimulus to ensure handset vocoder latency effects and echo cancellation devices (if any) were appropriately stabilized during measurements.
- ii. The appropriate post-processing was applied according to the system processing chain illustrated in Figure 4-6. All R10 frequencies were plotted with respect to 0dB at 1kHz value and aligned with respect to the EIA-504 mask.
- The margin is represented by the closest measured data point on the curve to the EIA-504 limit lines, in dB.

Signal Quality Index

- i. Ensuring the WD was at maximum RF power, maximum volume, backlight off, display on, maximum contrast setting, keypad lights on (when possible) with no audio signal through the vocoder, the WD was measured over at least 100 Hz - 10,000 Hz, maximized over 5 seconds with a 50ms sample time for the ABM2 measurement (5 second time period is used in noise measurements under standards such as IEEE 269, etc.).
- ii. After applying half-band integration and A-weighting to the result, a power sum was applied over each 1/3 octave bandwidth frequency for an ABM2 value.
- iii. This result was subtracted from the ABM1 result in step a, to obtain the Signal Quality.

V. **Test Setup**

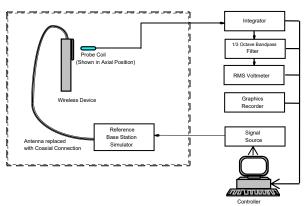


Figure 4-12 **Audio Magnetic Field Test Setup**

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of @ element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|---------------------------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 14 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 14 01 43 |

Environmental conditions such as temperature and relative humidity are monitored to ensure there are no impacts on system specifications. Proper voltage and power line frequency conditions are maintained with three phase power sources. Environmental noise and reflections are monitored through system checks.

VI. **Deviation from C63.19 Test Procedure**

Non-conducted RF connection due to inaccessible RF ports.

VII. Air Interface Technologies Tested

All air interfaces which support voice capabilities over a managed CMRS or pre-installed OTT VoIP applications were tested for T-coil. See Table 2-1 for more details regarding which modes were tested.

VIII. Wireless Device Channels and Frequencies

1. 2G/3G Modes

The frequencies listed in the table below are those that lie in the center of the bands used for cellular telephony. Please refer to the Original Certification for full evaluation on 2G/3G mode.

> Table 4-3 Center Channels and Frequencies

| Contor Chainiolo ana Froquencio | | | | |
|--|--|--|--|--|
| Test frequencies & associated channels | | | | |
| Frequency (MHz) | | | | |
| Cellular 850 | | | | |
| 190 (GSM) 836.60 | | | | |
| | | | | |

| FCC ID: A3LSMF926B | PCTEST Bood to be part of the country HAC (T-COIL) TEST REPORT | | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 15 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | raye 10 01 43 |

IX. Test Flow

The flow diagram below was followed (From C63.19):

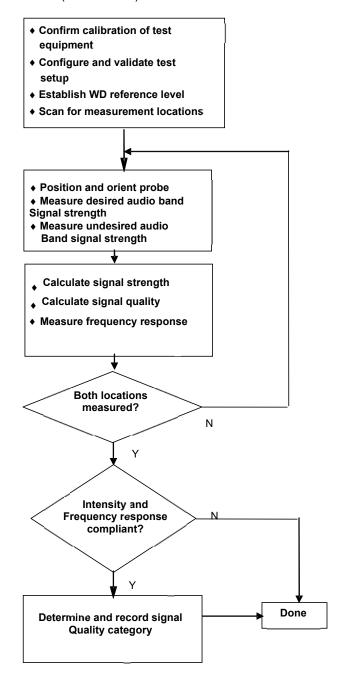


Figure 4-13 C63.19 T-Coil Signal Test Process

| FCC ID: A3LSMF926B | PCTEST* | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 16 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 10 01 43 |

5. OTT VOIP TEST SYSTEM AND DUT CONFIGURATION

I. Test System Setup for OTT VoIP T-Coil Testing

1. OTT VoIP Application

Google Duo is a pre-installed application on the DUT which allows for VoIP calls in a held-to-ear scenario. Duo uses the OPUS audio codec and supports a bitrate range of 6kb/s to 75kb/s. All air interfaces capable of a data connection were evaluated with Google Duo.

2. Equipment Setup

A CMW500 callbox was used to perform OTT VoIP T-coil measurements. The Data Application Unit (DAU) of the CMW500 was connected to the internet and allowed for an IP data connection on the DUT. An auxiliary VoIP unit was used to initiate an OTT VoIP call to the DUT. The auxiliary VoIP unit allowed for the configuration and monitoring of the OTT VoIP codec bitrate during a call. Both high and low bitrate settings were evaluated in to determine the worst-case configuration.

3. Audio Level Settings

According to KDB 285076 D02, the average speech level of -20dBm0 shall be used for protocols not specifically listed in Table 7.1 of ANSI C63.19-2011 or the ANSI C63.19-2011 VoLTE interpretation². The auxiliary VoIP unit allowed for monitoring the signal input level to ensure that the settings for speech input and full scale levels resulted in the -20dBm0 speech input level to the DUT for the OTT VoIP call.

Note: The green highlighted text is approved by FCC under the TCB PAG Re-Use Policy 388624 D01 IV. D. for T-Coil Testing for WI-FI calling and Google Duo.

II. **DUT Configuration for OTT VolP T-Coil Testing**

1. Codec Configuration

An investigation was performed for each applicable data mode to determine the audio codec configuration to be used for testing. The effects of codec configuration were found to be independent of radio configuration; therefore, only one radio configuration for each applicable data mode was used for these investigations. The 6kbps codec setting was used for the audio codec on the auxiliary VoIP unit for OTT VoIP T-Coil testing. See Original Certification for full evaluation on OTT VoIP T-Coil Testing.

Table 5-1 Codec Investigation - OTT VolP (FDGF)

| Codec investigation – OTT voir (EDGE) | | | | | |
|---------------------------------------|--------|--------|-------------|---------|--|
| Codec Setting: | 75kbps | 6kbps | Orientation | Channel | |
| ABM1 (dBA/m) | 11.78 | 10.95 | Axial | 661 | |
| ABM2 (dBA/m) | -25.08 | -25.12 | | | |
| Frequency Response | Pass | Pass | | | |
| S+N/N (dB) | 36.86 | 36.07 | | | |




Figure 5-1 Audio Band Magnetic Curve Measurement Block Diagram

² FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of a simmed | HAC (T-COIL) TEST REPORT | | Approved by: Quality Manager |
|-----------------------------|--------------------------------------|--------------------------|--|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 17 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 17 01 43 |

T-COIL TEST SUMMARY

Table 6-1 **Consolidated Tabled Results**

| | | esponse | _ | netic / Verdict | FCC S | SNNR | Margin from | | |
|--------------------|-----------------|---------|--------|--------------------|--------|-------|-------------|--------|--|
| C63.19 Section | | 8.3.2 | | 8.3.1 | | 8.3.4 | | (dB) | |
| 000.10 | Cos. 19 Section | | Radial | Axial | Radial | Axial | Radial | | |
| GSM | Cellular | PASS | NA | PASS | PASS | PASS | PASS | -10.07 | |
| EDGE (OTT VoIP) | Cellular | PASS | NA | PASS | PASS | PASS | PASS | -5.57 | |

Raw Handset Data I.

Table 6-2 Raw Data Results for GSM - Ant M1 + M2

| Mode | Orientation | Channel | Device Posture | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Ambient Noise [dB(A/m)] | Frequency Response Margin (dB) | S+N/N (dB) | FCC Limit (dB) | Margin from FCC Limit (dB) | C63.19-2011 | Test Coordinates |
|----------|-------------|---------|----------------|-------------------|-------------------|----------------------------|--------------------------------------|---------------|-------------------|----------------------------|-------------|---------------------|
| GSM850 | Axial | 128 | FLAT - FRONT | 4.22 | -32.21 | -62.21 | 2.00 | 36.43 | 20.00 | -16.43 | T4 | 1.6, 3.4 |
| GSIVIOSU | Axidi | 128 | FLAT-BACK | 10.06 | -20.01 | -02.21 | 2.00 | 30.07 | 20.00 | -10.07 | T4 | 1.6, 1.8 |

Table 6-3 Raw Data Results for EDGE (OTT VoIP)

| Mode | Orientation | Channel | Device Posture | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Ambient Noise [dB(A/m)] | Frequency Response Margin (dB) | S+N/N (dB) | FCC Limit (dB) | Margin from FCC Limit (dB) | | Test Coordinates |
|----------------|-------------|-----------|----------------|-------------------|-------------------|----------------------------|--------------------------------------|---------------|-------------------|----------------------------------|----------|---------------------|
| EDCESEA | Dodial | 190 | FLAT-FRONT | -2.50 | -28.07 | -62.91 | N/A | 25.57 | 20.00 | -5.57 | Т3 | 1.6, 2.6 |
| EDGE850 Radial | 190 | FLAT-BACK | 3.31 | -37.34 | -62.91 | -02.91 N/A | 40.65 | 20.00 | -20.65 | T4 | 1.0, 2.6 | |

| FCC ID: A3LSMF926B | PCTEST* Houd to be port of the consent | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 18 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 10 01 43 |

II. Test Notes

A. General

- 1. Phone Condition: Mute on; Backlight off; Max Volume; Max Contrast
- 2. 'Radial' orientation refers to radial transverse.
- Hearing Aid Mode (Phone→Settings→Other call settings→Hearing aid compatibility) was set to ON for Frequency Response compliance
- 4. Speech Signal: 3GPP2 Normal Test Signal
- 5. Bluetooth and WIFI were disabled while testing 2G/3G modes.
- 6. The Margin from FCC limit column indicates a margin from the FCC limit for compliance (T3).

B. GSM

1. Power Configuration: GSM850: PCL=5;

2. Vocoder Configuration: EFR (GSM);

C. OTT VoIP


1. Vocoder Configuration: 6kbps

2. EDGE Configuration


a. MCS Index: 7

b. Number of TX slots: 2

III. 1 kHz Vocoder Application Check



This model was verified to be within the linear region for ABM1 measurements at -16 dBm0 for GSM. This measurement was taken in the axial configuration above the maximum location.



This model was verified to be within the linear region for ABM1 measurements at -20 dBm0 for OTT VoIP. This measurement was taken in the axial configuration above the maximum location.

| FCC ID: A3LSMF926B | PCTEST* Proud to be part of (8) element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|---|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 10 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 19 of 43 |


IV. T-Coil Validation Test Results

Table 6-4 **Helmholtz Coil Validation Table of Results**

| Item | Target | Result | Verdict |
|---------------------------------|--------------|---------|---------|
| Axial | | | |
| Magnetic Intensity, -10 dBA/m | -10 ± 0.5 dB | -9.892 | PASS |
| Environmental Noise | < -58 dBA/m | -62.21 | PASS |
| Frequency Response, from limits | > 0 dB | PASS | |
| Radial | | | |
| Magnetic Intensity, -10 dBA/m | -10 ± 0.5 dB | -10.158 | PASS |
| Environmental Noise | < -58 dBA/m | -62.91 | PASS |
| Frequency Response, from limits | > 0 dB | 0.70 | PASS |

| FCC ID: A3LSMF926B | PCTEST* Proud to be post of @ observed | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 20 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | raye 20 01 43 |

٧. **ABM1 Magnetic Field Distribution Scan Overlays**

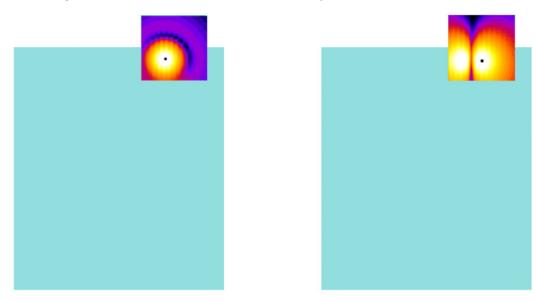

Axial Radial (Transverse) Figure 6-1 T-Coil Scan Overlay Magnetic Field Distributions (Flat – Back)

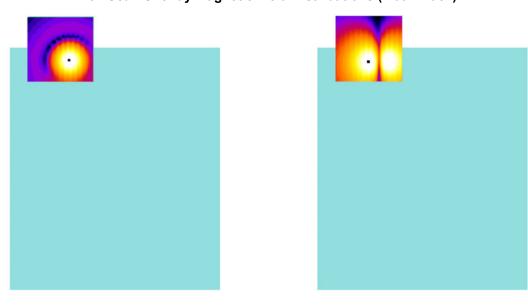


Figure 6-2 T-Coil Scan Overlay Magnetic Field Distributions (Flat – Front)

Radial (Transverse)

Notes:

- Final measurement locations are indicated by a cursor on the contour plots.
- 2. See Test Setup Photographs for actual WD overlay.

Axial

| FCC ID: A3LSMF926B | PCTEST* Nood to be part of the consent | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 21 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 21 01 43 |

MEASUREMENT UNCERTAINTY

Table 7-1 **Uncertainty Estimation Table**

| Contribution | Data +/- % | Data +/- dB | Data Type | Probability distribution | Divisor | Standard uncertainty | Standard Uncertainty (dB) |
|-------------------------------|---|----------------|---------------|--------------------------|---------|----------------------|---------------------------------|
| ABM Noise | 7.0% | 0.29 | Std. Dev. | Normal k=1 | 1.00 | 7.0% | |
| RF Reflections | 4.7% | 0.20 | Specification | Rectangular | 1.73 | 2.7% | |
| Reference Signal Level | 12.2% | 0.50 | Specification | Rectangular | 1.73 | 7.0% | |
| Positioning Accuracy | 10.0% | 0.41 | Uncertainty | Rectangular | 1.73 | 5.8% | |
| Probe Coil Sensitivity | 12.2% | 0.50 | Specification | Rectangular | 1.73 | 7.0% | |
| Probe Linearity | 2.4% | 0.10 | Std. Dev. | Normal k=1 | 1.00 | 2.4% | |
| Cable Loss | 2.8% | 0.12 | Specification | Rectangular | 1.73 | 1.6% | |
| Frequency Analyzer | 5.0% | 0.21 | Specification | Rectangular | 1.73 | 2.9% | |
| System Repeatability | 5.0% | 0.21 | Std. Dev. | Normal k=1 | 1.00 | 5.0% | |
| WD Repeatability | 9.0% | 0.37 | Std. Dev. | Normal k=1 | 1.00 | 9.0% | |
| Positioner Accuracy | 1.0% | 0.04 | Specification | Rectangular | 1.73 | 0.6% | |
| | | | | | | | |
| Combined standard uncertainty | Combined standard uncertainty, uc (k=1) | | | | | | |
| Expanded uncertainty (k=2), | 95% conf | idence le | /el | | | 35.3% | 1.31 |

Notes:

- Test equipments are calibrated according to techniques outlined in NIS81, NIS3003 and NIST Tech Note 1297.
- All equipments have traceability according to NIST. Measurement Uncertainties are defined in further detail in NIS 81 and NIST Tech Note 1297 and UKAS M3003.

Measurement uncertainty reflects the quality and accuracy of a measured result as compared to the true value. Such statements are generally required when stating results of measurements so that it is clear to the intended audience that the results may differ when reproduced by different facilities. Measurement results vary due to the measurement uncertainty of the instrumentation, measurement technique, and test engineer. Most uncertainties are calculated using the tolerances of the instrumentation used in the measurement, the measurement setup variability, and the technique used in performing the test. While not generally included, the variability of the equipment under test also figures into the overall measurement uncertainty. Another component of the overall uncertainty is based on the variability of repeated measurements (so-called Type A uncertainty). This may mean that the Hearing Aid compatibility tests may have to be repeated by taking down the test setup and resetting it up so that there are a statistically significant number of repeat measurements to identify the measurement uncertainty. By combining the repeat measurement results with that of the instrumentation chain using the technique contained in NIS 81 and NIS 3003, the overall measurement uncertainty was estimated.

| FCC ID: A3LSMF926B | POTEST* Proud to be post of @ elements | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogg 22 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 22 of 43 |

EQUIPMENT LIST

Table 8-1 **Equipment List**

| | | Equipment List | | | | |
|-----------------|---------------------|---|-----------|--------------|-----------|---------------|
| Manufacturer | Model | Description | Cal Date | Cal Interval | Cal Due | Serial Number |
| Listen | SoundConnect | Microphone Power Supply | 9/24/2020 | Biennial | 9/24/2022 | 0899-PS150 |
| RME | Fireface UC | Soundcheck Acoustic Analyzer External Audio Interface | 9/29/2020 | Biennial | 9/29/2022 | 23792992 |
| Rohde & Schwarz | CMW500 | Wideband Radio Communication Tester | 3/22/2021 | Annual | 3/22/2022 | 162125 |
| Rohde & Schwarz | CMW500 | Radio Communication tester | 9/4/2020 | Annual | 9/4/2021 | 140144 |
| Seekonk | NC-100 | Torque Wrench (8" lb) | 8/4/2020 | Biennial | 8/4/2022 | 21053 |
| TEM | | HAC Positioner | N/A | | N/A | N/A |
| TEM | | HAC System Controller with Software | N/A | | N/A | N/A |
| TEM | Helmholtz Coil | Helmholtz Coil | 9/23/2020 | Biennial | 9/23/2022 | SBI 1052 |
| TEM | Axial T-Coil Probe | Axial T-Coil Probe | 9/23/2020 | Biennial | 9/23/2022 | TEM-1123 |
| TEM | Radial T-Coil Probe | Radial T-Coil Probe | 9/23/2020 | Biennial | 9/23/2022 | TEM-1129 |

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of ® element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager | |
|-----------------------------|---------------------------------------|--------------------------|---------|---------------------------------|--|
| Filename: | Test Dates: | DUT Type: | | Dogo 22 of 42 | |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 23 of 43 | |

| FCC ID: A3LSMF926B | PCTEST: Proud to be post of @ element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager | |
|-----------------------------|---------------------------------------|--------------------------|---------|---------------------------------|--|
| Filename: | Test Dates: | DUT Type: | | Page 24 of 43 | |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | raye 24 01 43 | |



PCTEST Hearing-Aid Compatibility Facility

DUT: HH Coil - SN: SBI 1052

Type: HH Coil Serial: SBI 1052


Measurement Standard: ANSI C63.19-2011

Equipment:


• Probe: Axial T-Coil Probe - SN: TEM-1123; Calibrated: 9/23/2020

Helmholtz Coil – SN: SBI 1052; Calibrated: 9/23/2020

Noise Spectrum

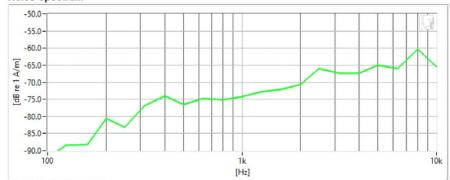

Frequency Response

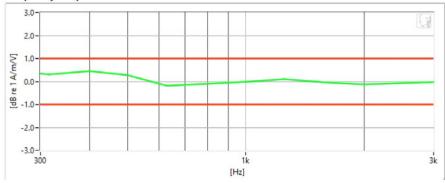

Results

| Verification 1kHz Intensity | -9.892 dB | • | Max/Min | -9.5/-10.5 |
|-----------------------------|-----------|---|------------------|--------------|
| Verification ABM2 | -62.21 dB | • | Maximum | -58.0 |
| Frequency Response Margin | 500m dB | ~ | Tolerance curves | Aligned Data |

| FCC ID: A3LSMF926B | PCTEST: Novel to be post of seminated | HAC (T-COIL) TEST REPORT | -COIL) TEST REPORT | |
|-----------------------------|--|--------------------------|--------------------|---------------|
| Filename: | Test Dates: | DUT Type: | | Page 25 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 25 01 45 |



DUT: HH Coil - SN: SBI 1052


Type: HH Coil Serial: SBI 1052

Measurement Standard: ANSI C63.19-2011


Equipment:

- Probe: Radial T-Coil Probe SN: TEM-1129; Calibrated: 9/23/2020
- Helmholtz Coil SN: SBI 1052; Calibrated: 9/23/2020

Noise Spectrum

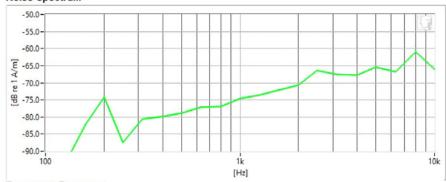

Frequency Response

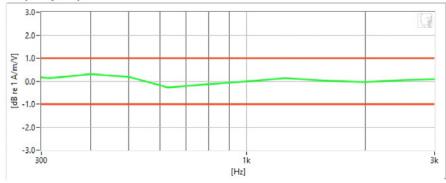

Results

| Verification 1kHz Intensity | -10.158 | dB | • | Max/Min | -9.5/-10.5 |
|-----------------------------|---------|----|---|------------------|--------------|
| Verification ABM2 | -62.91 | dB | • | Maximum | -58.0 |
| Frequency Response Margin | 700m | dB | • | Tolerance curves | Aligned Data |

| FCC ID: A3LSMF926B | PCTEST: Novel to be post of seminated | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 26 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 20 01 43 |



DUT: A3LSMF926B

Type: Portable Handset Serial: 0528M

Measurement Standard: ANSI C63.19-2011

Equipment:


Probe: Axial T-Coil Probe – SN: TEM-1123; Calibrated: 9/23/2020

Test Configuration:

Mode: GSM850 Channel: 128

Speech Signal: 3GPP2 Normal Test Signal

Device Posture: FLAT - BACK Antenna Config.: M1 + M2

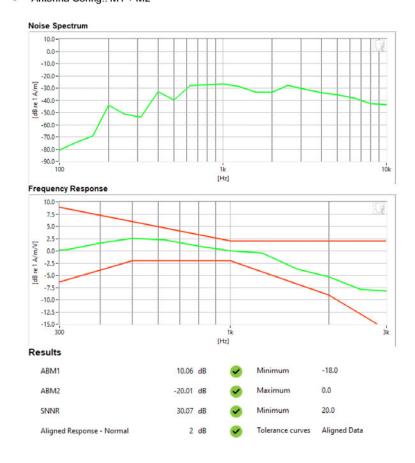

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of @ circumst. | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 27 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 27 01 43 |



DUT: A3LSMF926B

Type: Portable Handset Serial: 0528M

Measurement Standard: ANSI C63.19-2011

Equipment:

Probe: Radial T-Coil Probe – SN: TEM-1129; Calibrated: 9/23/2020


Test Configuration:

· VolP Application: Google Duo

 Mode: EDGE850 Channel: 190

Device Posture: FLAT - FRONT

Noise Spectrum

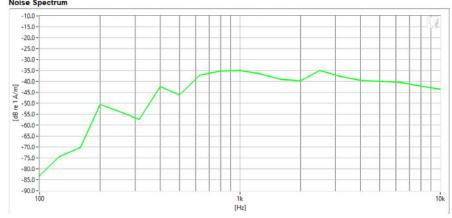

Results

| A | BM1 | -2.5 | dB | \checkmark | Minimum | -18.0 |
|---|-----|--------|----|--------------|---------|-------|
| А | BM2 | -28.07 | dB | ✓ | Maximum | 0.0 |
| S | NNR | 25.57 | dB | ✓ | Minimum | 20.0 |

| FCC ID: A3LSMF926B | PCTEST* Proud to be port of ® simmed | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager | |
|-----------------------------|--------------------------------------|--------------------------|---------|------------------------------|--|
| Filename: | Test Dates: | DUT Type: | | Dogg 20 of 42 | |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 28 of 43 | |

10. CALIBRATION CERTIFICATES

| FCC ID: A3LSMF926B | PCTEST* Proud to be part of (8) element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager | |
|-----------------------------|---|--------------------------|---------|------------------------------|--|
| Filename: | Test Dates: | DUT Type: | | Page 29 of 43 | |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 29 01 43 | |

1M2108050089-02.A3L (Rev 1) 8/2/2021-08/3/2021 Portable Handset Page 29 of 43
© 2021 PCTEST REV 3.5.M



Certificate of Conformance

AXIAL T COIL PROBE

Manufactured by: TEM CONSULTING Model No: AXIAL T COIL PROBE

Serial No: TEM-1123 Calibration Recall No: 31288

Submitted By:

ANDREW HARWELL **Customer:**

PCTEST ENGINEERING LAB Company: Address:

6660-B DOBBIN ROAD

COLUMBIA MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

AXIAL T C TEM C

Upon receipt for Calibration, the instrument was found to be:

(X)

tolerance of the indicated specification. See attached Report of Calibration. The information supplied relates to the calibrated item listed above and statment of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance, 2.Manufacturer's tolerance is too small compared to calibration and measurment capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

limitations. The decision rule has been communicated and approved by customer during contract

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date: 23-Sep-20 James Zhu

Certificate No: 31288 - 2 Quality Manager ISO/IEC 17025:2017

QA Doc. #1051 Rev. 3.0 5/29/20 Certificate Page 1 of 1 West Caldwell

ACCREDITED

Calibration uncompromised calibration Laboratories, Inc.

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor, NY 14564, U.S.A.

Approved by: FCC ID: A3LSMF926B HAC (T-COIL) TEST REPORT SAMSUNG **Quality Manager** Filename: Test Dates: **DUT Type:** Page 30 of 43 1M2108050089-02.A3L (Rev 1) 8/2/2021-08/3/2021 Portable Handset

© 2021 PCTEST



ACCREDITED

ISO/IEC 17025: 2017

Calibration Lab. Cert. # 1533.01

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

or

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

Model No.: Axial T Coil Probe


Serial No.: TEM-1123

I. D. No.: XXXX

| Probe Sensitivity measured wit | h Helmholf | tz Coil | | | |
|--|------------|---------|---------------------------|-------------|------|
| Helmholtz Coil; | | | Before & after data same: | X | |
| the number of turns on each coil; | 10 | No. | | | |
| the radius of each coil, in meters; | 0.204 | m | Laboratory Environment: | | |
| the current in the coils, in amperes.; | 0.08 | Α | Ambient Temperature: | 20.7 | °C |
| Heimholtz Coil Constant; | 7.04 | A/m/V | Ambient Humidity: | 42.1 | % RH |
| Helmholtz Coil magnetic field; | 5.71 | A/m | Ambient Pressure: | 99.094 | kPa |
| | | | Calibration Date: | 23-Sep-2020 | |
| Probe Sensitivity at | 1000 | Hz. | Calibration Due: | | |
| was | -60.24 | dBV/A/m | Report Number: | 31288 | 3 -2 |
| | 0.972 | mV/A/m | Control Number: | 31288 | 3 |
| Probe resistance | 898 | Ohms | | | |

The above listed instrument meets or exceeds the tested manufacturer's specifications. This Calibration is traceable through NIST test numbers: 684.07/O-000001126-20

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2.

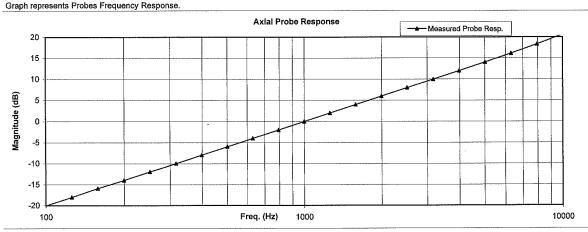

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17025

Cal. Date: 23-Sep-2020

Measurements performed by:/

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

James Zhu
Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 1 of 2

| FCC ID: A3LSMF926B | PCTEST* Broad to be post of @ sinerand | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager | |
|-----------------------------|--|--------------------------|---------|---------------------------------|--|
| Filename: | Test Dates: | DUT Type: | | Dogg 24 of 42 | |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 31 of 43 | |

HCATEMC_TEM-1123_Sep-23-2020

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

for

Model No.: Axial T Coil Probe

Serial No.: TEM-1123

TEM Consulting LP Axial T Coil Probe Company: PCTest Engineering Lab

| Test | Function | Tolera | nce | Measured values | | | |
|--------|--------------------------|-------------|---------|-----------------|-----|---------|--|
| ······ | | | | Before | Out | Remarks | |
| 1.0 | Probe Sensitivity at | 1000 Hz. | dBV/A/m | -60.24 | | | |
| | | | dB | | | | |
| 2.0 | Probe Level Linearity | | 6 | 6.03 | | | |
| | - | Ref. (0 dB) | 0 | 0.00 | | | |
| | | | -6 | -6.03 | | | |
| | | -12 | -12.05 | | | | |
| | | | Hz | | | | |
| 3.0 | Probe Frequency Response | | 100 | -20.0 | | | |
| | | | 126 | -18.0 | | | |
| | | | 158 | -15.9 | | | |
| | | | 200 | -14.0 | | | |
| | • | | 251 | -12.0 | | | |
| | | | 316 | -10.0 | | | |
| | | | 398 | -8.0 | | | |
| | | | 501 | -6.0 | | | |
| | | | 631 | -4.0 | | | |
| | | | 794 | -2.0 | | | |
| | | Ref. (0 dB) | 1000 | 0.0 | | | |
| | | | 1259 | 2.0 | | | |
| | | | 1585 | 4.0 | | | |
| | | | 1995 | 6.0 | | | |
| | | | 2512 | 8.0 | | | |
| | | | 3162 | 10.0 | | | |
| | | | 3981 | 12.0 | | 1 | |
| | | | 5012 | 14.0 | | | |
| | | | 6310 | 16.1 | | | |
| | | | 7943 | 18.3 | | | |
| | | | 10000 | 20.7 | | | |
| | | | | 1 | | 1 | |

| Instruments u | sed for calibration: | | Date of Cal. | Traceablity No. | Due Date |
|---------------|----------------------|--------------|--------------|------------------------|------------|
| HP | 34401A | S/N US360641 | 2-Jul-2020 | ,610119 | 2-Jul-2021 |
| HP | 34401A | S/N US361024 | 2-Jul-2020 | ,610119 | 2-Jul-2021 |
| HP | 33120A | S/N US360437 | 2-Jul-2020 | .610119 | 2-Jul-2021 |
| B&K | 2133 | S/N 1583254 | 1-Jul-2020 | 684.07/O-0000001126-20 | 1-Jul-2021 |

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCATEMC

Page 2 of 2

| FCC ID: A3LSMF926B | POTEST* | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 32 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 32 01 43 |



Certificate of Conformance

for

RADIAL T COIL PROBE

Manufactured by:

TEM CONSULTING

Model No:

RADIAL T COIL PROBE

Serial No:

TEM-1129

Calibration Recall No:

all No: 31288
Submitted By:

Customer:

ANDREW HARWELL

Company:

PCTEST ENGINEERING LAB

Address:

6660-B DOBBIN ROAD

COLUMBIA

MD 21045

The subject instrument was calibrated to the indicated specification using standards traceable to the SI through the National Institute of Standards and Technology or to accepted values of natural physical constants. This document certifies that the instrument met the following specification upon its return to the submitter.

West Caldwell Calibration Laboratories Procedure No.

RADIAL T TEM C

Upon receipt for Calibration, the instrument was found to be:

10/13/2020

Within (X

tolerance of the indicated specification. See attached Report of Calibration.

The information supplied relates to the calibrated item listed above and statment of conformance for ALL given specifications and standards fall under the decision rule: A=(L-(U95)), where A is acceptance limit, L is manufacturer specifications and U95 is confidence level of 95% at k=2. This includes but not limited to:1. Measured value does not meet manufacturer's tolerance, 2.Manufacturer's tolerance is too small compared to calibration and measurement capability uncertainties, 3. Test uncertainty ratio does not meet the 4:1 ratio due to test instrumentation limitations. The decision rule has been communicated and approved by customer during contract

West Caldwell Calibration Laboratories' calibration control system meets the following requirements, ISO 10012-1 MIL STD 45662A, ANSI/NCSL Z540-1, IEC Guide 25, ISO 9001:2015, and ISO 17025

Note: With this Certificate, Report of Calibration is included.

Approved by:

Calibration Date:

23-Sep-20

James Zhu

Certificate No:

31288 - 1

Quality Manager ISO/IEC 17025:2017

QA Doc. #1051 Rev. 3.0 5/29/20

Certificate Page 1 of 1

West Caldwell Calibration

uncompromised calibration Laboratories, Inc.

1575 State Route 96, Victor, NY 14564, U.S.A.

Calibration Lab. Cert. # 1533.01

© 2021 PCTEST

REV 3.5.M



ACCREDITED
Calibration Lab. Cert. # 1533.01

ISO/IEC 17025: 2017

1575 State Route 96, Victor NY 14564

REPORT OF CALIBRATION

for

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

Model No.: Radial T Coil Probe

Serial No.: TEM-1129

I. D. No.: XXXX

| Probe Sensitivity measured with | h Helmholi | tz Coil | | | |
|--|------------|---------|---------------------------|-------------|------|
| Helmholtz Coil; | | | Before & after data same: | X | |
| the number of turns on each coil; | 10 | No. | | | |
| the radius of each coil, in meters; | 0.204 | m | Laboratory Environment: | | |
| the current in the coils, in amperes.; | 0.08 | Α | Ambient Temperature: | 20.7 | °C |
| Helmholtz Coil Constant; | 7.04 | A/m/V | Ambient Humidity: | 42.1 | % RH |
| Helmholtz Coil magnetic field; | 5.70 | A/m | Ambient Pressure: | 99.094 | kPa |
| | | | Calibration Date: | 23-Sep-2020 | |
| Probe Sensitivity at | 1000 | Hz. | Re-calibration Due: | | |
| was | -60.37 | dBV/A/m | Report Number: | 31288 | B -1 |
| • | 0.959 | mV/A/m | Control Number: | 31288 | 8 |
| Probe resistance | 897 | Ohms | | | |

The expanded uncertainty of calibration: 0.30dB at 95% confidence level with a coverage factor of k=2. Graph represents Probes Frequency Response.

Radial Probe Response

Measured Probe Resp.

The above listed instrument was checked using calibration procedure documented in West Caldwell

Calibration Laboratories Inc. procedure :

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Calibration was performed by West Caldwell Calibration Laboratories Inc. under Operating Procedures

intended to implement the requirements of ISO10012-1, IEC Guide 25, ANSI/NCSL Z540-1, (MIL-STD-45662A) and ISO 9001:2015, ISO 17925

Cal. Date: 23-Sep-2020

Measurements performed by:

Calibrated on WCCL system type 9700

James Zhu Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal, Labs, Inc.

Page 1 of 2

| FCC ID: A3LSMF926B | PCTEST . Houd to be part of the element | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dags 24 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 34 of 43 |

HCRTEMC_TEM-1129_Sep-23-2020

West Caldwell Calibration Laboratories Inc.

1575 State Route 96, Victor NY 14564 Tel. (585) 586-3900 FAX (585) 586-4327

Calibration Data Record

TEM Consulting LP Radial T Coil Probe Company: PCTest Engineering Lab

for Model No.: Radial T Coil Probe

Serial No.: TEM-1129

| Test | Function | Tolera | nce | Measured values | | | |
|------|--------------------------|---|---------|-----------------|-----|---|--|
| | | | | Before | Out | Remarks | |
| 1.0 | Probe Sensitivity at | 1000 Hz. | dBV/A/m | -60.37 | | | |
| | | | dB | | | , | |
| 2.0 | Probe Level Linearity | | 6 | 6.04 | | | |
| | | Ref. (0 dB) | 0 | 0.00 | | | |
| | | | -6 | -6.03 | | | |
| | | | -12 | -12.05 | | | |
| | | · . · · · · · · · · · · · · · · · · · · | Hz | | | | |
| 3.0 | Probe Frequency Response | | 100 | -20.0 | | | |
| | | | 126 | -18.0 | | | |
| | | | 158 | -16.0 | | | |
| • | • | | 200 | -14.0 | | | |
| | | | 251 | -12.0 | | | |
| | | | 316 | -10.0 | | | |
| | | | 398 | -8.0 | | | |
| | | | 501 | -6.0 | | 1 | |
| | | | 631 | -4.0 | | ĺ | |
| | | | 794 | -2.0 | | | |
| | | Ref. (0 dB) | 1000 | 0.0 | | | |
| | | | 1259 | 2.0 | | | |
| | | | 1585 | 4.0 | | | |
| | | | 1995 | 6.0 | | | |
| | | | 2512 | 8.0 | | | |
| | | | 3162 | 10.0 | | | |
| | | | 3981 | 12.0 | | | |
| | | | 5012 | 14.0 | | | |
| | | | 6310 | 16.1 | | | |
| | | | 7943 | 18.3 | | | |
| | | | 10000 | 20.7 | | | |

| Instrument | ts used for calibration: | | Date of Cal. | Traceability No. | Due Date |
|------------|--------------------------|--------------|--------------|-----------------------|------------|
| HP | 34401A | S/N US360641 | 2-Jul-2020 | ,610119 | 2-Jul-2021 |
| HP | 34401A | S/N US361024 | 2-Jul-2020 | .610119 | 2-Jul-2021 |
| HP | 33120A | S/N US360437 | 2-Jul-2020 | .610119 | 2-Jul-2021 |
| B&K | 2133 | S/N 1583254 | 1-Jul-2020 | 684.07/O-000001126-20 | 1-Jul-2021 |

Cal. Date: 23-Sep-2020

Calibrated on WCCL system type 9700

This document shall not be reproduced, except in full, without the written approval from West Caldwell Cal. Labs. Inc.

Tested by: James Zhu

Rev. 7.0 Jan. 24, 2014 Doc. # 1038 HCRTEMC

Page 2 of 2

| FCC ID: A3LSMF926B | POTEST* | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--------------------|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 35 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 33 01 43 |

CONCLUSION 11.

The measurements indicate that the flat (open) configuration for the referenced wireless communications device complies with the HAC limits specified in accordance with the ANSI C63.19 Standard and FCC WT Docket No. 01-309 RM-8658. Precise laboratory measures were taken to assure repeatability of the tests. The tested device complies with the requirements in respect to all parameters specific to the test. The test results and statements relate only to the item(s) tested.

The measurement system and techniques presented in this evaluation are proposed in the ANSI standard as a means of best approximating wireless device compatibility with a hearing-aid. The literature is under continual re-construction.

| FCC ID: A3LSMF926B | PCTEST: Proud to be port of a reserved | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Dogo 26 of 42 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Page 36 of 43 |

12. REFERENCES

- ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless communication devices and Hearing Aids.", New York, NY, IEEE, May 2011
- FCC Office of Engineering and Technology KDB, "285076 D01 HAC Guidance v05," September 13, 2017
- FCC Office of Engineering and Technology KDB, "285076 D02 T-Coil Testing for CMRS IP v03," September 13, 2017
- 4. FCC Public Notice DA 06-1215, Wireless Telecommunications Bureau and Office of Engineering and Technology Clarify Use of Revised Wireless Phone Hearing Aid Compatibility Standard, June 6, 2006
- 5. FCC 3G Review Guidance, Laboratory Division OET FCC, May/June 2006
- 6. Berger, H. S., "Compatibility Between Hearing Aids and Wireless Devices," Electronic Industries Forum, Boston, MA, May, 1997
- 7. Berger, H. S., "Hearing Aid and Cellular Phone Compatibility: Working Toward Solutions," Wireless Telephones and Hearing Aids: New Challenges for Audiology, Gallaudet University, Washington, D.C., May, 1997 (To be reprinted in the American Journal of Audiology).
- 8. Berger, H. S., "Hearing Aid Compatibility with Wireless Communications Devices, " IEEE International Symposium on Electromagnetic Compatibility, Austin, TX, August, 1997.
- 9. Bronaugh, E. L., "Simplifying EMI Immunity (Susceptibility) Tests in TEM Cells," in the 1990 IEEE International Symposium on Electromagnetic Compatibility Symposium Record, Washington, D.C., August 1990, pp. 488-491
- 10. Byme, D. and Dillon, H., The National Acoustics Laboratory (NAL) New Procedure for Selecting the Gain and Frequency Response of a Hearing Aid, Ear and Hearing 7:257-265, 1986.
- 11. Crawford, M. L., "Measurement of Electromagnetic Radiation from Electronic Equipment using TEM Transmission Cells, "U.S. Department of Commerce, National Bureau of Standards, NBSIR 73-306, Feb. 1973.
- Crawford, M. L., and Workman, J. L., "Using a TEM Cell for EMC Measurements of Electronic Equipment," U.S. Department of Commerce, National Bureau of Standards. Technical Note 1013, July 1981.
- 13. EHIMA GSM Project, Development phase, Project Report (1st part) Revision A. Technical-Audiological Laboratory and Telecom Denmark, October 1993.
- 14. EHIMA GSM Project, Development phase, Part II Project Report. Technical-Audiological Laboratory and Telecom Denmark, June 1994.
- EHIMA GSM Project Final Report, Hearing Aids and GSM Mobile Telephones: Interference Problems, Methods of Measurement and Levels of Immunity. Technical-Audiological Laboratory and Telecom Denmark, 1995.
- 16. HAMPIS Report, Comparison of Mobile phone electromagnetic near field with an upscaled electromagnetic far field, using hearing aid as reference, 21 October 1999.

| FCC ID: A3LSMF926B | PCTEST . Road to be port of disconnel | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 37 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 37 01 43 |

- 17. Hearing Aids/GSM, Report from OTWIDAM, Technical-Audiological Laboratory and Telecom Denmark, April 1993.
- 18. IEEE 100, The Authoritative Dictionary of IEEE Standards Terms, Seventh Edition.
- 19. Joyner, K. H, et. al., Interference to Hearing Aids by the New Digital Mobile Telephone System, Global System for Mobile (GSM) Communication Standard, National Acoustic Laboratory, Australian Hearing Series, Sydney 1993.
- Joyner, K. H., et. al., Interference to Hearing Aids by the Digital Mobile Telephone System, Global System for Mobile Communications (GSM), NAL Report #131, National Acoustic Laboratory, Australian Hearing Series, Sydney, 1995.
- 21. Kecker, W. T., Crawford, M. L., and Wilson, W. A., "Contruction of a Transverse Electromagnetic Cell", U.S. Department of Commerce, National Bureau of Standards, Technical Note 1011, Nov. 1978.
- 22. Konigstein, D., and Hansen, D., "A New Family of TEM Cells with enlarged bandwidth and Optimized working Volume," in the Proceedings of the 7th International Symposium on EMC, Zurich, Switzerland, March 1987; 50:9, pp. 127-132.
- 23. Kuk, F., and Hjorstgaard, N. K., "Factors affecting interference from digital cellular telephones," Hearing Journal, 1997; 50:9, pp 32-34.
- 24. Ma, M. A., and Kanda, M., "Electromagnetic Compatibility and Interference Metrology," U.S. Department of Commerce, National Bureau of Standards, Technical Note 1099, July 1986, pp. 17-43.
- 25. Ma, M. A., Sreenivashiah, I., and Chang, D. C., "A Method of Determining the Emission and Susceptibility Levels of Electrically Small Objects Using a TEM Cell," U.S. Department of Commerce, National Bureau of Standards, Technial Note 1040, July 1981.
- 26. McCandless, G. A., and Lyregaard, P. E., Prescription of Gain/Output (POGO) for Hearing Aids, Hearing Instruments 1:16-21, 1983
- 27. Skopec, M., "Hearing Aid Electromagnetic Interference from Digital Wireless Telephones, "IEEE Transactions on Rehabilitation Engineering, vol. 6, no. 2, pp. 235-239, June 1998.
- 28. Technical Report, GSM 05.90, GSM EMC Considerations, European Telecommunications Standards Institute, January 1993.
- 29. Victorian, T. A., "Digital Cellular Telephone Interference and Hearing Aid Compatibility—an Update," Hearing Journal 1998; 51:10, pp. 53-60
- 30. Wong, G. S. K., and Embleton, T. F. W., eds., AIP Handbook of Condenser Microphones: Theory, Calibration and Measurements, AIP Press.

| FCC ID: A3LSMF926B | PCTEST . Road to be port of disconnel | HAC (T-COIL) TEST REPORT | SAMSUNG | Approved by: Quality Manager |
|-----------------------------|--|--------------------------|---------|---------------------------------|
| Filename: | Test Dates: | DUT Type: | | Page 38 of 43 |
| 1M2108050089-02.A3L (Rev 1) | 8/2/2021-08/3/2021 | Portable Handset | | Fage 30 01 43 |