

MEASUREMENT REPORT

FCC Part 15F ULTRA WIDEBAND

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
06/03 – 06/10/2022
Test Report Issue Date:
06/20/2022
Test Site/Location:
PCTEST Lab. Yongin-Si, Gyeonggi-do, South Korea
Test Report Serial No.:
1M2204110052-20.A3L

FCC ID: **A3LSMF936B**
APPLICANT: **Samsung Electronics Co., Ltd.**

Application Type: Certification
Model: SM-F936B/DS
Additional Models: SM-F936B
EUT Type: Portable Handset
FCC Classification: Ultra Wideband (UWB)
FCC Rule Part(s): FCC Part 15 Subpart F (15.519, 15.521)
UWB Classification: Hand-held Communication Device
Test Procedure(s): ANSI C63.10-2013, KDB 393764 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013 (See Test Report). These measurements were performed with no deviation from the standards. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.




Prepared by



Reviewed by

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 1 of 70

TABLE OF CONTENTS

1.0	Introduction	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	EMI Suppression Device(s)/Modifications.....	4
2.5	Antenna Description.....	4
2.6	Software and Firmware.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure.....	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	Antenna Requirements	7
5.0	Measurement Uncertainty	8
6.0	TEST EQUIPMENT CALIBRATION DATA.....	9
7.0	TEST DATA	10
7.1	Summary	10
7.2	10dBc Bandwidth Measurement.....	11
7.3	Cessation Time.....	37
7.4	Peak Power and Maximum Average Emissions	39
7.5	Radiated Measurement Data above 960MHz.....	48
7.6	Radiated Spurious Emissions Measurements – Below 1GHz.....	59
7.7	Line Conducted Measurement Data	64
8.0	CONCLUSION	70

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 2 of 70

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, 16954, South Korea. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Yongin-si, Gyeonggi-do, 16954, South Korea.

- PCTEST is an ISO 17025-2017 accredited test facility under the National Voluntary Laboratory Accreditation Program (NVLAP) with Certificate number 600143-0 for Specific Absorption Rate (SAR), where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST Korea facility is accredited, designated, and recognized in accordance with the provision of Radio Wave Act and International Standard ISO/IEC 17025:2017 under the National Radio Research Agency.
 - Designation Number / CABID: KR0169
 - Test Firm Registration Number of FCC: 417945
 - Test Firm Registration Number of ISSED: 26168

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 3 of 70

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF936B**. The test data contained in this report pertains only to the EUT's ultra-wideband transmitter.

Test Device Serial No.: 0658M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 5G NR (FR1), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5,6GHz), Bluetooth (1x, EDR, LE), NFC, UWB, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of Section 10 of ANSI C63.10-2013. The EUT setup procedures of ANSI C63.10-2013 were used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Section 3.2 for AC line conducted emissions test setups, 3.3 for radiated emissions test setups, respectively.

The Equipment Under Test (EUT) was capable of operating on two antennas in two separate modes [HPRF, preamble 27] and [BPRF, preamble 9~12]. Care was taken to ensure the worst-case modes were investigated and reported.

This device supports two configurations: one is with screen open and one is with screen closed. Open, half opened and closed configurations are tested, and the worst case radiated emissions data is shown in this report.

For more information, please see Section 7.0 for test data and the test setup photos document for the test setup photographs.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

2.5 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna 1 Gain [dBi]	Antenna 2 Gain [dBi]
6.25 – 6.75	-2.4	N/A
7.75 – 8.25	-3.9	-2.2

Table 2-1. Maximum Peak Antenna Gain

2.6 Software and Firmware

The test was conducted with firmware version F936BXXE0AVF7 installed on the EUT.

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 4 of 70

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2014) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by SY cooperation RF Enclosures. The line-conducted facility is located inside a 7m x 3.66m x 2.7m shielded enclosure. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 7.7. The EMI Receiver mode of the R&S ESW was used to perform AC line conducted emissions testing. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 10.20.01.

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 5 of 70

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 6 of 70

4.0 ANTENNA REQUIREMENTS

Except from §15.203 of the FCC Rules/Regulations:

“An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are permanently attached
- There are no provisions for a connection to an external antenna

The EUT complies with the requirements of §15.203.

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 7 of 70

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Line Conducted Disturbance	1.60
Radiated Disturbance (<1GHz)	3.01
Radiated Disturbance (>1GHz)	3.58
Radiated Disturbance (>18GHz)	3.17

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 8 of 70

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
COM-Power Corporation	AL-130R	Active Loop Antenna (9kHz-30MHz)	2020-10-29	Biennial	2022-10-28	10160045
Schwarzbeck	VULB9162	Broadband TRILOG Antenna (30MHz-1GHz)	2021-07-13	Biennial	2023-07-12	9162-217
Sunol Sciences	DRH-118	Horn Antenna (1-18GHz)	2021-01-12	Biennial	2023-01-11	A060215
NARDA	180-442A-KF	Horn Antenna (18-40GHz)	2020-11-20	Biennial	2022-11-19	T058701-03
Rohde & Schwarz	SFU	Shielded Filter Unit	2022-03-02	Annual	2023-03-01	102131
Rohde & Schwarz	TS-PR1840	Preamplifier (18-40GHz)	2021-07-07	Annual	2022-07-06	100049
Rohde & Schwarz	ENV216	Two-Line V-Network	2022-05-09	Annual	2023-05-08	101319
TESTEK	-	LISN Extension Cord	2022-05-09	Annual	2023-05-08	N/A
Rohde & Schwarz	ESW	EMI Test Receiver (2Hz-44GHz)	2021-07-06	Annual	2022-07-05	101761
Rohde & Schwarz	FSW	Signal and Spectrum Analyzer(2Hz-43.5GHz)	2022-01-18	Annual	2023-01-17	101955
Anritsu	S820E	Cable and Antenna Analyzer	2021-07-07	Annual	2022-07-06	1839097
Anritsu	TOSLKF50A-40	Calibration Kit	N/A	-	N/A	1825024

Table 6-1. Test Equipment Calibration Schedule

Note:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 9 of 70

7.0 TEST DATA

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF936B
 FCC Classification: Ultra-Wideband (UWB)

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
§15.503, §15.519 (b)	10dBc Bandwidth	≥ 500MHz	RADIATED	PASS	Section 7.2
§15.519(a)(1)	Cessation Time	Transmission shall cease in less than 10s			Section 7.3
§15.519(e)	Maximum Peak Power	< 0dBm EIRP in 50MHz BW			Section 7.4
§15.519(c)	Maximum Average Emission in the range of 3100 – 10600 MHz	< -41.3 EIRP in dBm			Section 7.4
§15.519(c)	Radiated Emissions Above 960MHz	See table in 15.519(c) for details			Section 7.4, 7.5
§15.519(d)	Radiated Emissions in the 1164 – 1240Mhz and 1559 – 1610MHz GPS Bands	< -85.3 EIRP in dBm			Section 7.5
§15.519(c), §15.519(a)	Radiate Emissions Below 960MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209			Section 7.6
§15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits (RSS-Gen)	LINE CONDUCTED	PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 10 of 70

7.2 10dBc Bandwidth Measurement

§15.503(a), §15.519(b)

Test Overview and Limit

Per the definition of 15.503, the UWB Bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna.

The 10dB bandwidth of the UWB signal must remain fully within the 3100 – 10,600MHz band. The 10dB bandwidth of the UWB signal must also be greater than or equal to 500MHz.

Test Procedures Used

ANSI C63.10-2013 Section 10.1

Test Settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Detector = Peak
4. Span was set wide enough to capture the 10dB points of the signal
5. Trace mode = max hold
6. Sweep = 2s
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

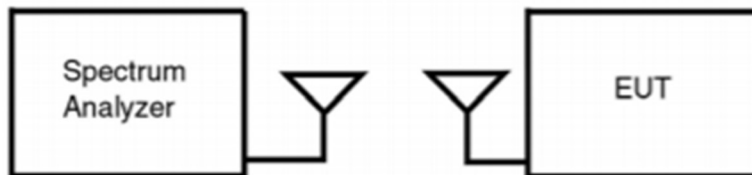


Figure 7-1. Test Instrument and Measurement Setup

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 11 of 70

Frequency [GHz]	Channel	Preamble Id	Config	Mode	Fm [GHz]	Fl [GHz]	Fh [GHz]	Fc [GHz]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
6.5	5	9	SP0	BPRF	6.334	6.146	6.678	6.412	532	500	Pass
		9	SP1	BPRF	6.334	6.147	6.711	6.429	564	500	Pass
		9	SP3	BPRF	6.334	6.086	6.885	6.486	799	500	Pass
		10	SP0	BPRF	6.491	6.234	6.880	6.557	646	500	Pass
		10	SP1	BPRF	6.491	6.231	6.878	6.555	647	500	Pass
		10	SP3	BPRF	6.334	6.104	6.741	6.423	637	500	Pass
		11	SP0	BPRF	6.324	6.156	6.718	6.437	562	500	Pass
		11	SP1	BPRF	6.324	6.154	6.727	6.441	573	500	Pass
		11	SP3	BPRF	6.334	6.110	6.735	6.423	625	500	Pass
		12	SP0	BPRF	6.341	6.137	6.725	6.431	588	500	Pass
		12	SP1	BPRF	6.341	6.139	6.727	6.433	588	500	Pass
		12	SP3	BPRF	6.334	6.090	6.885	6.487	796	500	Pass
		27	SP0	HPRF	6.326	6.102	6.739	6.421	637	500	Pass
		27	SP1	HPRF	6.325	6.199	6.739	6.469	540	500	Pass
		27	SP3	HPRF	6.333	6.197	6.732	6.464	535	500	Pass
8.0	9	9	SP0	BPRF	7.832	7.600	8.375	7.988	775	500	Pass
		9	SP1	BPRF	7.831	7.703	8.376	8.040	674	500	Pass
		9	SP3	BPRF	7.788	7.594	8.378	7.986	784	500	Pass
		10	SP0	BPRF	7.988	7.729	8.376	8.052	647	500	Pass
		10	SP1	BPRF	7.988	7.594	8.378	7.986	784	500	Pass
		10	SP3	BPRF	7.799	7.592	8.376	7.984	785	500	Pass
		11	SP0	BPRF	7.821	7.603	8.378	7.991	774	500	Pass
		11	SP1	BPRF	7.821	7.592	8.376	7.984	784	500	Pass
		11	SP3	BPRF	7.799	7.603	8.377	7.990	774	500	Pass
		12	SP0	BPRF	7.797	7.592	8.377	7.984	785	500	Pass
		12	SP1	BPRF	7.797	7.593	8.378	7.986	785	500	Pass
		12	SP3	BPRF	7.798	7.603	8.378	7.990	775	500	Pass
		27	SP0	HPRF	7.807	7.698	8.378	8.038	680	500	Pass
		27	SP1	HPRF	7.823	7.691	8.376	8.034	685	500	Pass
		27	SP3	HPRF	7.800	7.594	8.378	7.986	785	500	Pass

Table 7-2. UWB 10dBc Bandwidth Summary [ANT 1]

FCC ID: A3LSMF936B	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 12 of 70

10dBc Bandwidth Results -Ant 1




Plot 7-1. 10dBc Bandwidth – CH.5 - SP0 – Preamble 9



Plot 7-2. 10dBc Bandwidth – CH.5 – SP1 – Preamble 9

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 13 of 70

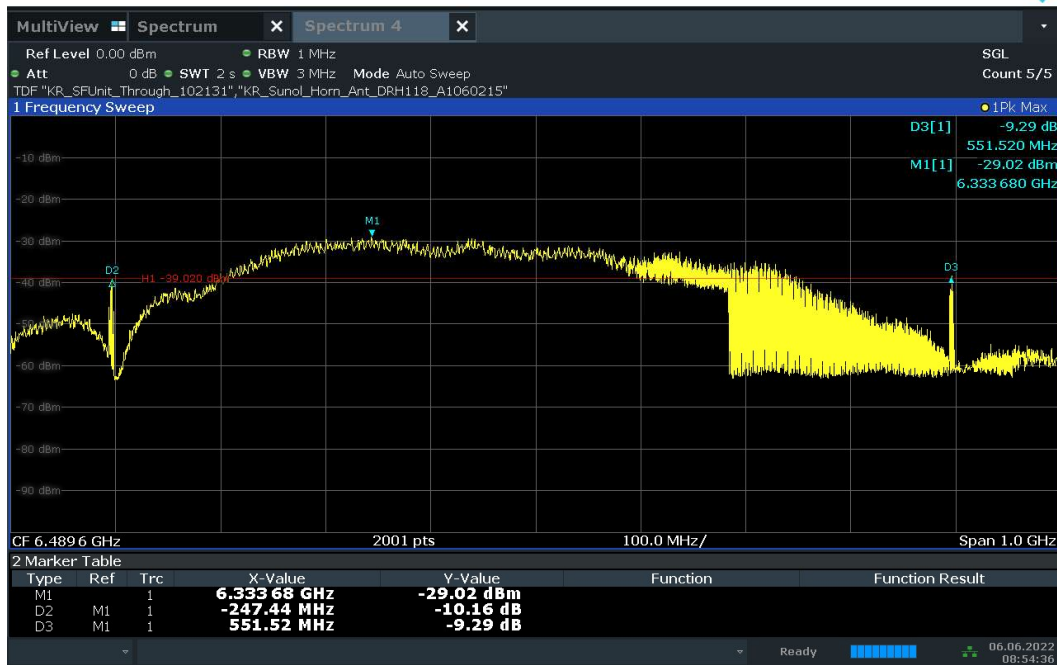

Plot 7-3. 10dBc Bandwidth – CH.5 – SP3 – Preamble 9




Plot 7-4. 10dBc Bandwidth – CH.5 - SP0 – Preamble 10

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 14 of 70



Plot 7-5. 10dBc Bandwidth – CH.5 – SP1 – Preamble 10

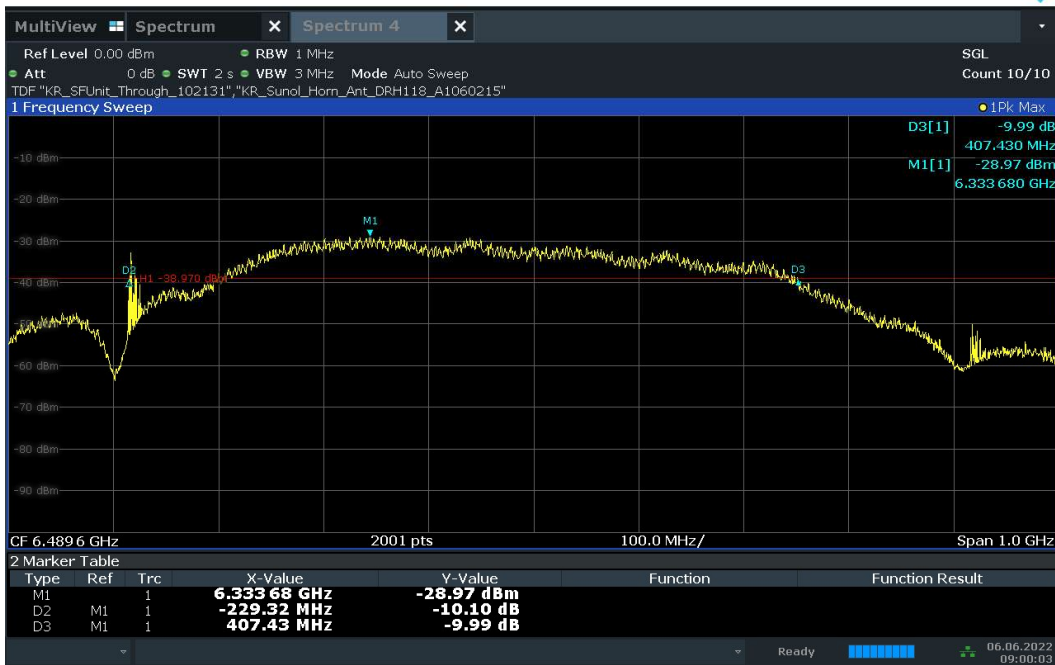

Plot 7-6. 10dBc Bandwidth – CH.5 – SP3 – Preamble 10

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 15 of 70




Plot 7-7. 10dBc Bandwidth – CH.5 - SP0 – Preamble 11



Plot 7-8. 10dBc Bandwidth – CH.5 – SP1 – Preamble 11

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 16 of 70

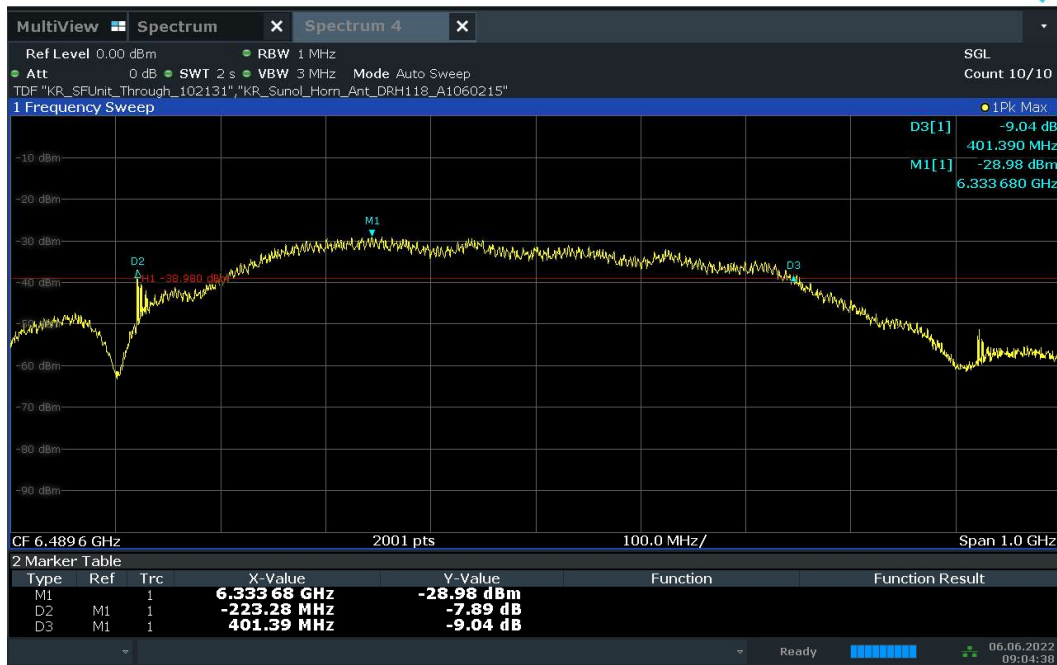


Plot 7-9. 10dBc Bandwidth – CH.5 – SP3 – Preamble 11




Plot 7-10. 10dBc Bandwidth – CH.5 - SP0 – Preamble 12

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 17 of 70

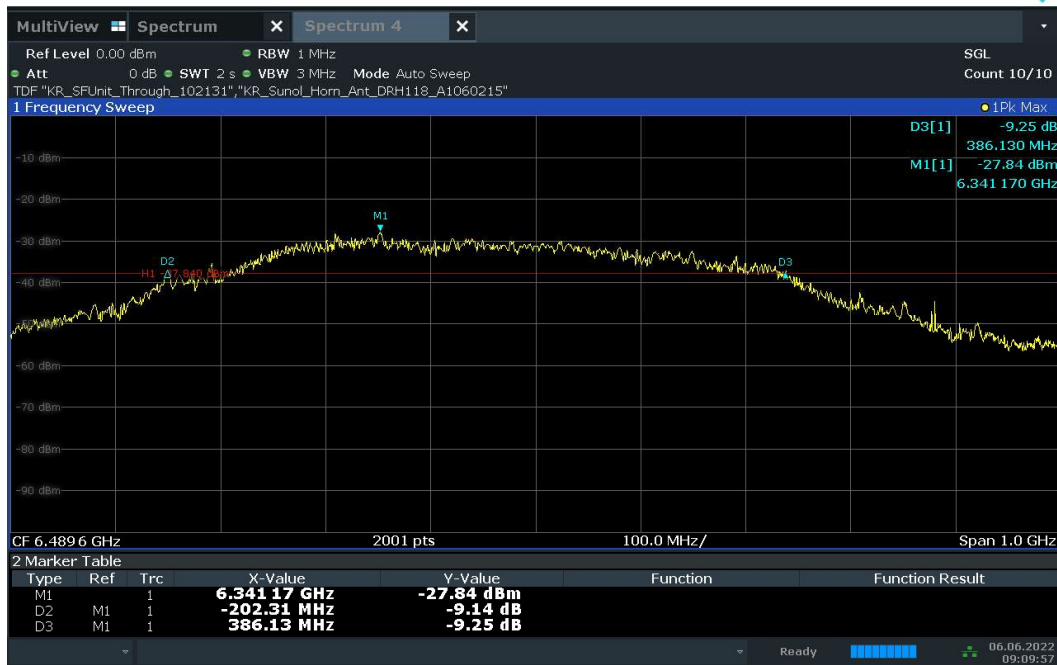


Plot 7-11. 10dBc Bandwidth – CH.5 – SP1 – Preamble 12

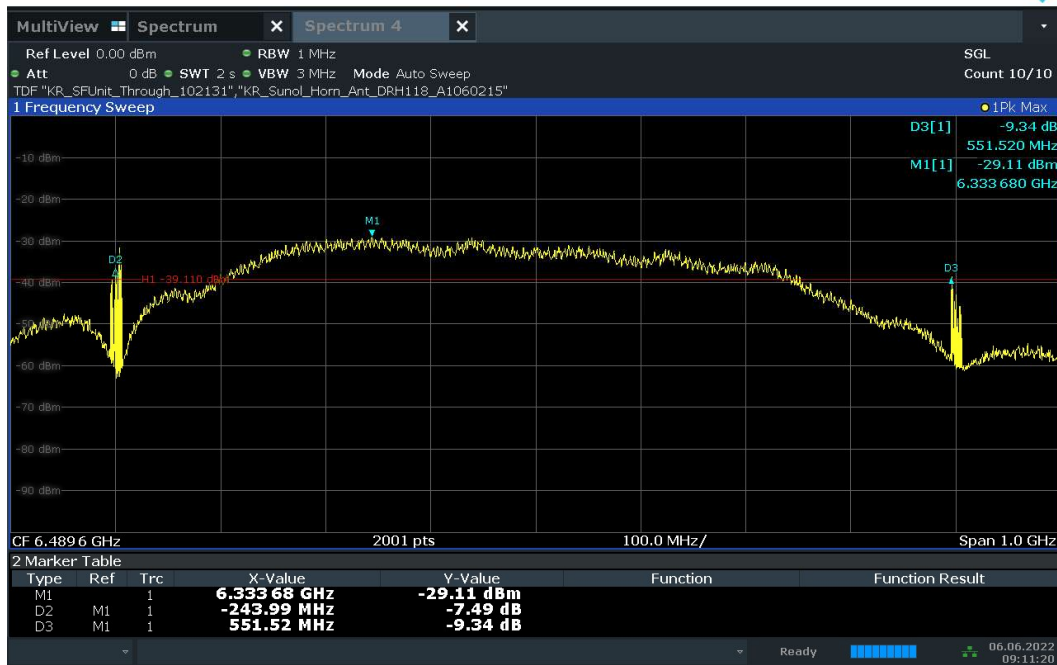


Plot 7-12. 10dBc Bandwidth – CH.5 – SP3 – Preamble 12

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 18 of 70

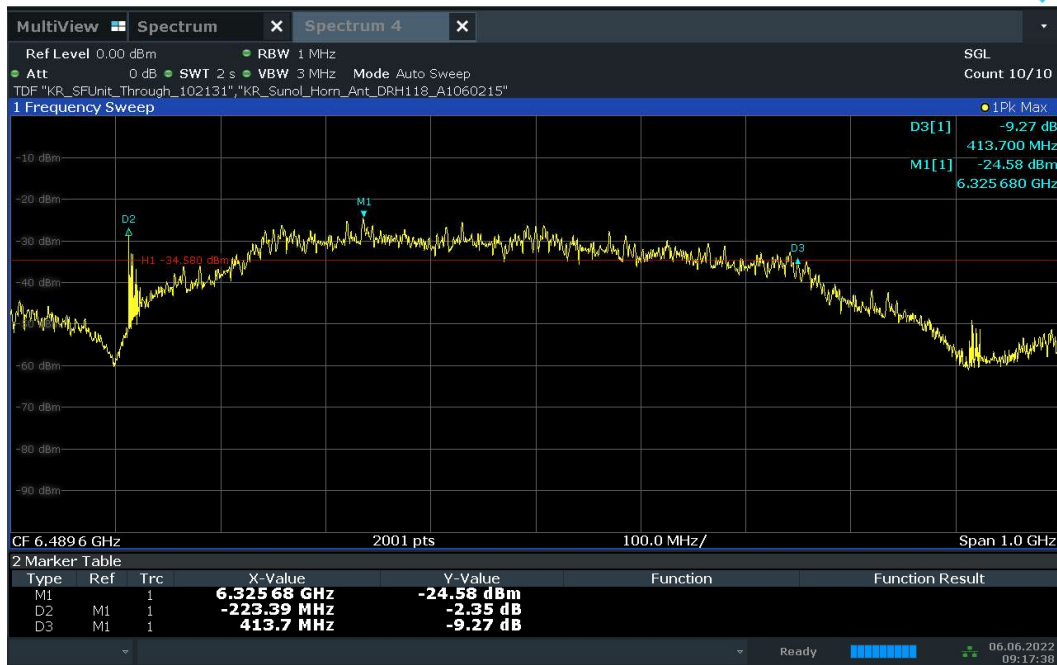

Plot 7-13. 10dBc Bandwidth – CH.5 - SP0 – Preamble 27

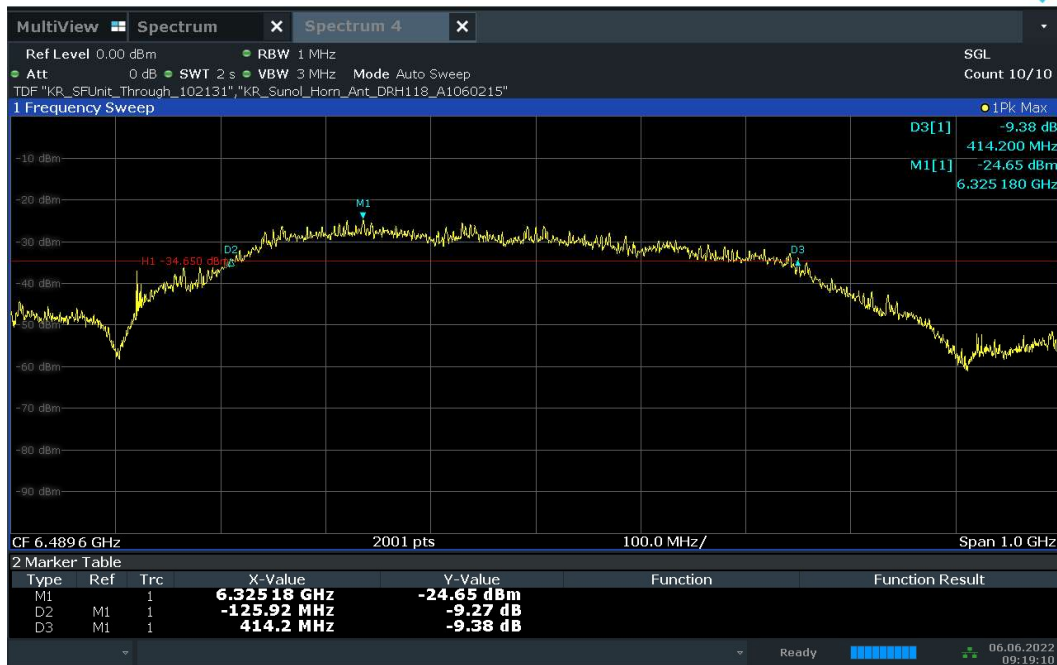


Plot 7-14. 10dBc Bandwidth – CH.5 – SP1 – Preamble 27

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 19 of 70



Plot 7-15. 10dBc Bandwidth – CH.5 – SP3 – Preamble 27

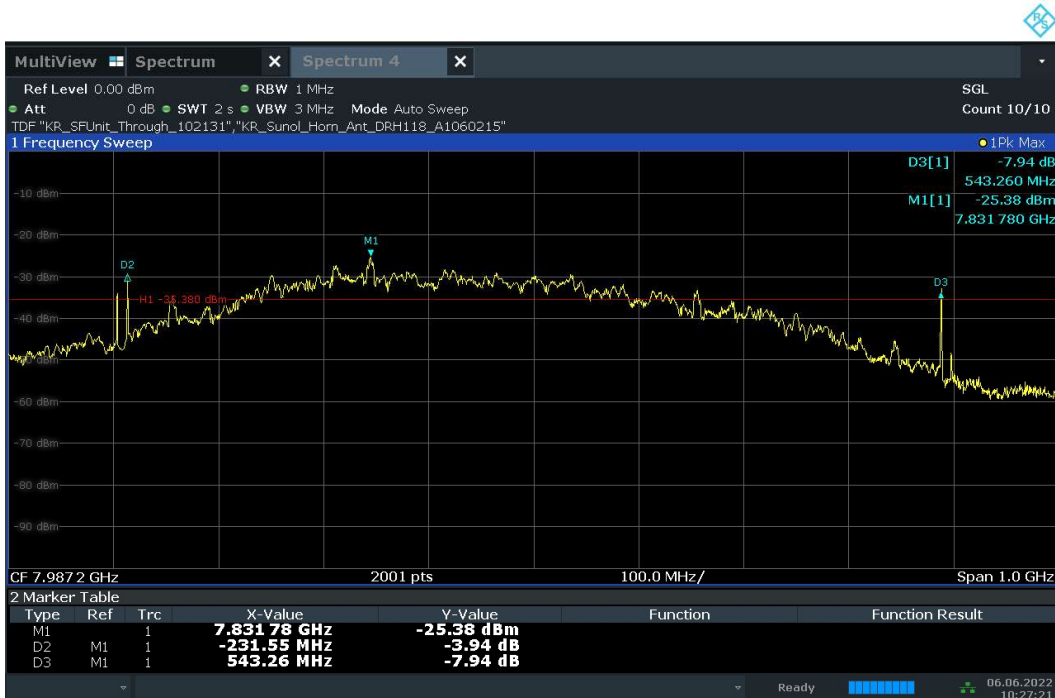


Plot 7-16. 10dBc Bandwidth – CH.9 - SP0 – Preamble 9

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 20 of 70



Plot 7-17. 10dBc Bandwidth – CH.9 – SP1 – Preamble 9

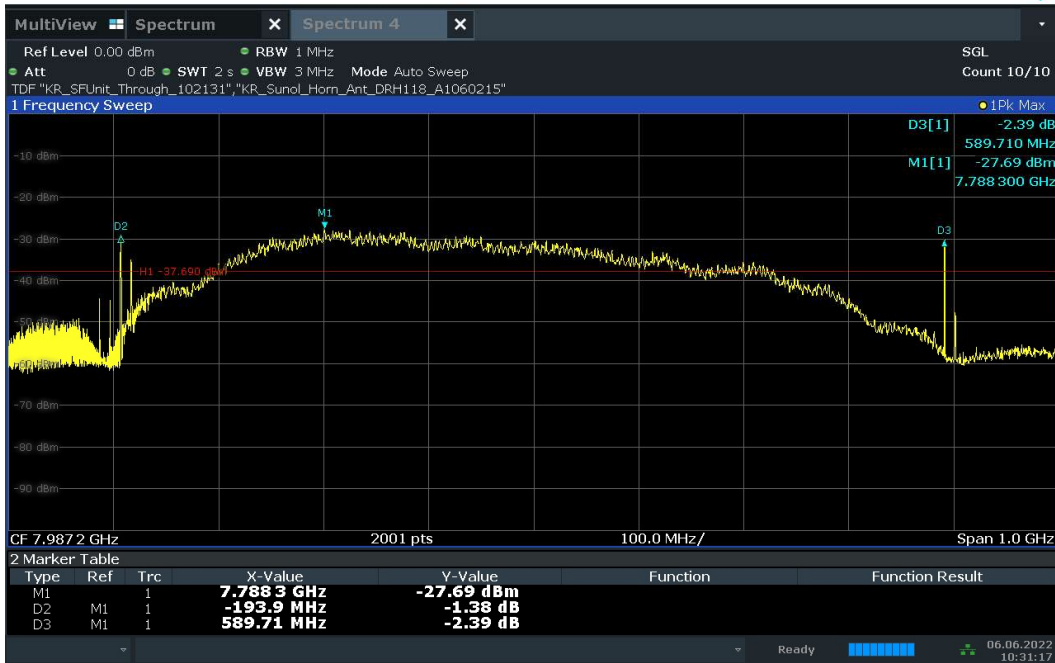

Plot 7-18. 10dBc Bandwidth – CH.9 – SP3 – Preamble 9

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 21 of 70




Plot 7-19. 10dBc Bandwidth – CH.9 - SP0 – Preamble 10




Plot 7-20. 10dBc Bandwidth – CH.9 – SP1 – Preamble 10

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset	Page 22 of 70	

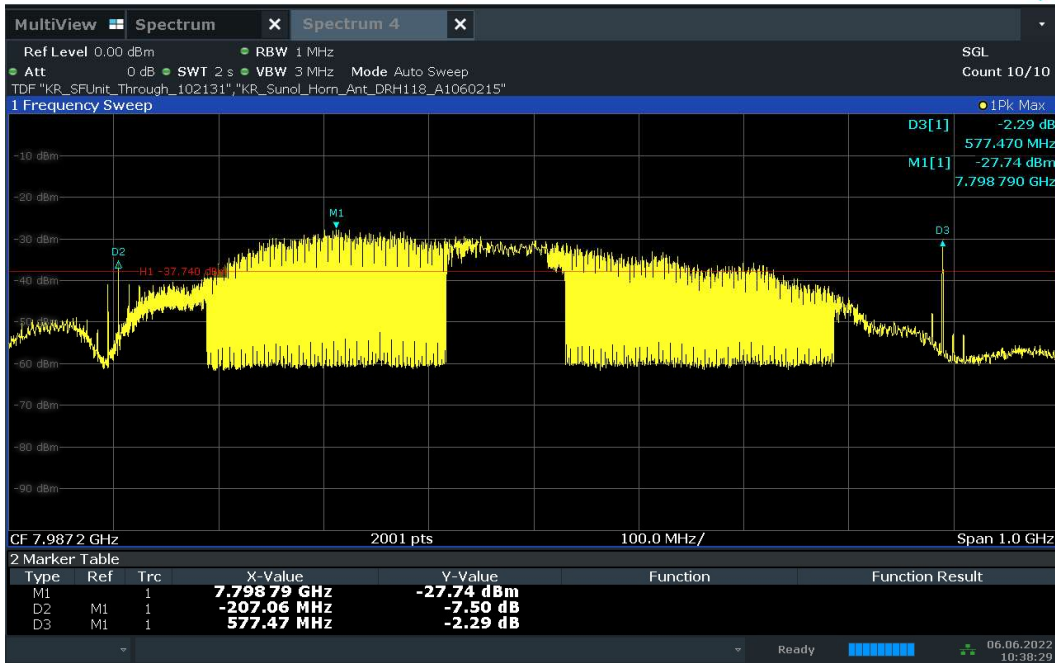

Plot 7-21. 10dBc Bandwidth – CH.9 – SP3 – Preamble 10

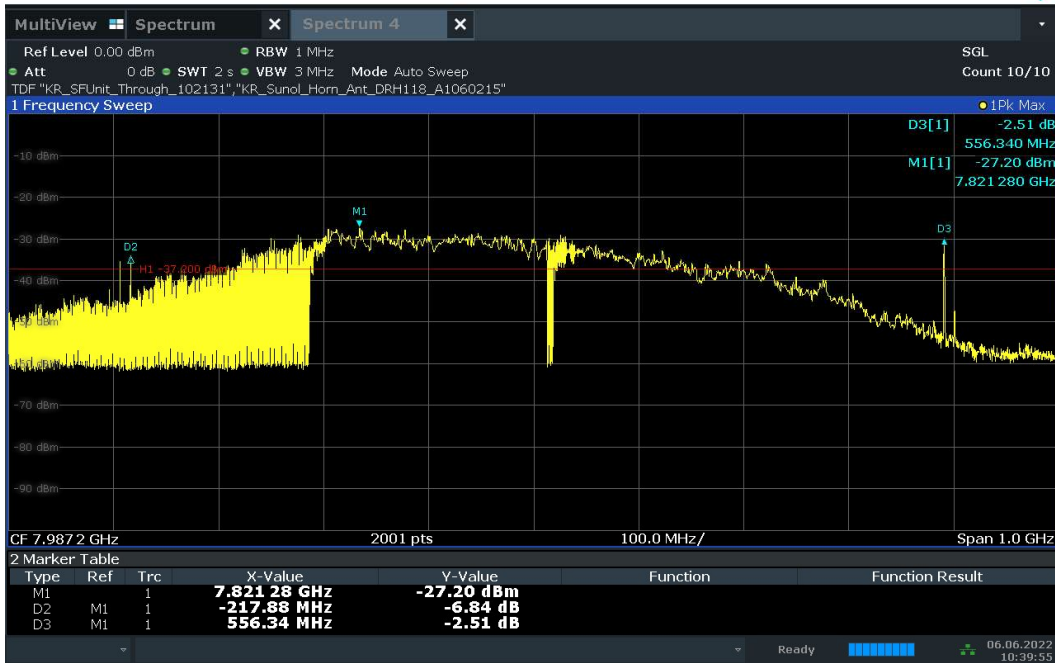


Plot 7-22. 10dBc Bandwidth – CH.9 - SP0 – Preamble 11

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 23 of 70



Plot 7-23. 10dBc Bandwidth – CH.9 – SP1 – Preamble 11

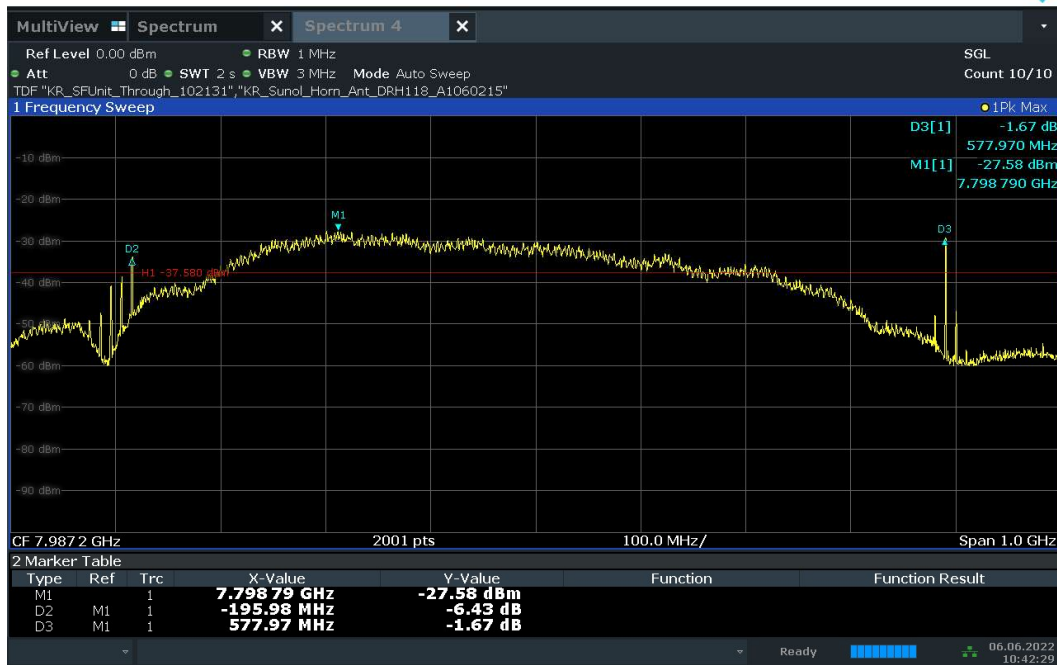

Plot 7-24. 10dBc Bandwidth – CH.9 – SP3 – Preamble 11

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 24 of 70




Plot 7-25. 10dBc Bandwidth – CH.9 - SP0 – Preamble 12




Plot 7-26. 10dBc Bandwidth – CH.9 – SP1 – Preamble 12

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 25 of 70

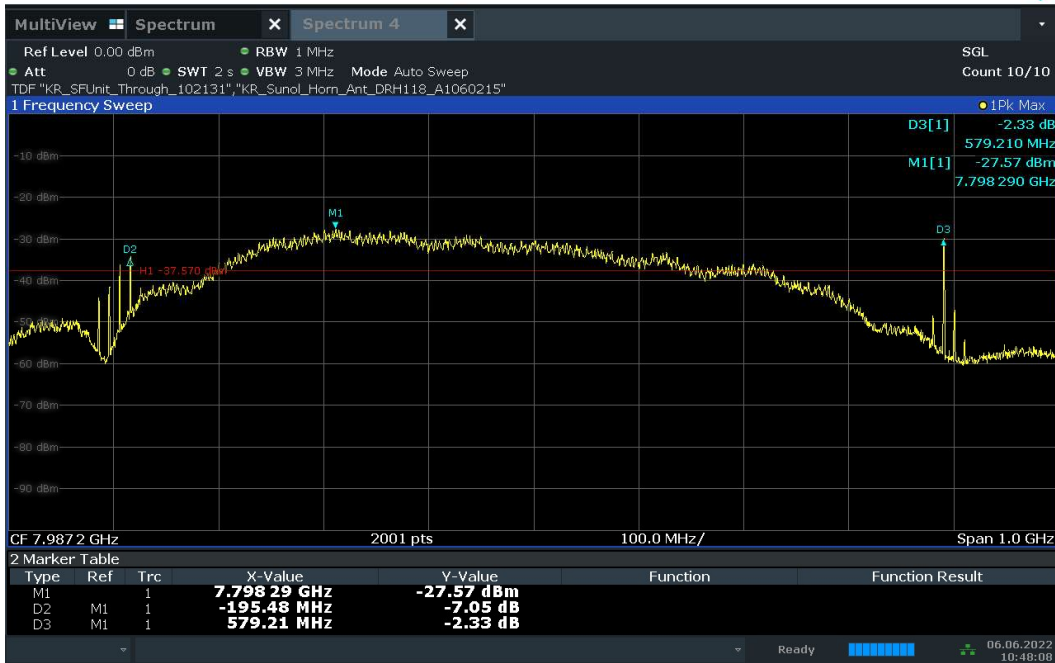

Plot 7-27. 10dBc Bandwidth – CH.9 – SP3 – Preamble 12

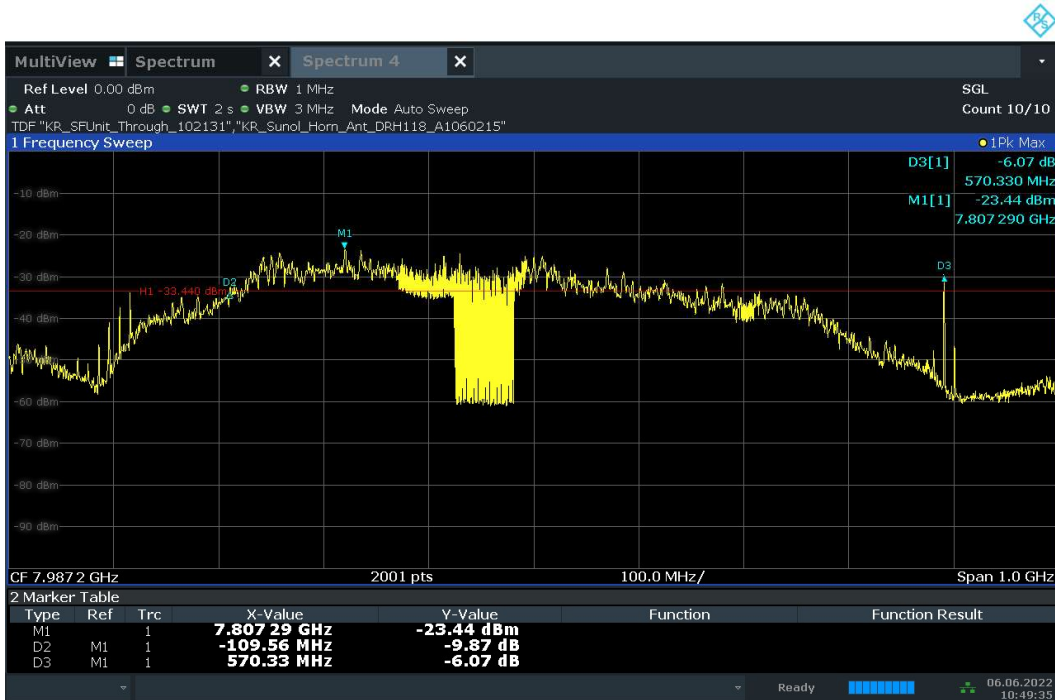

Plot 7-28. 10dBc Bandwidth – CH.9 - SP0 – Preamble 27

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 26 of 70



Plot 7-29. 10dBc Bandwidth – CH.9 – SP1 – Preamble 27



Plot 7-30. 10dBc Bandwidth – CH.9 – SP3 – Preamble 27

FCC ID: A3LSMF936B		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204110052-20.A3L	Test Dates: 06/03 – 06/10/2022	EUT Type: Portable Handset		Page 27 of 70