



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

PART 27 MEASUREMENT REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
04/01 - 06/23/2022
Test Report Issue Date:
06/23/2022
Test Site/Location:
Element Lab., Columbia, MD, USA
Test Report Serial No.:
1M2204010046-06.A3L

FCC ID:	A3LSMF936U
Applicant Name:	Samsung Electronics Co., Ltd.

Application Type:	Certification
Model:	SM-F936U
Additional Model(s):	SM-F936U1
EUT Type:	Portable Handset
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part:	27
Test Procedure(s):	ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 1 of 294

V3.0 1/6/2022

TABLE OF CONTENTS

1.0	INTRODUCTION	6
1.1	Scope	6
1.2	Element Test Location.....	6
1.3	Test Facility / Accreditations.....	6
2.0	PRODUCT INFORMATION.....	7
2.1	Equipment Description	7
2.2	Device Capabilities.....	7
2.3	Test Configuration	7
2.4	Software and Firmware	7
2.5	EMI Suppression Device(s)/Modifications	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Power and Radiated Spurious Emissions	8
4.0	MEASUREMENT UNCERTAINTY	9
5.0	TEST EQUIPMENT CALIBRATION DATA	10
6.0	SAMPLE CALCULATIONS	11
7.0	TEST RESULTS	12
7.1	Summary.....	12
7.2	Conducted Output Power Data	13
7.3	Occupied Bandwidth	20
7.4	Spurious and Harmonic Emissions at Antenna Terminal	96
7.5	Band Edge Emissions at Antenna Terminal	125
7.6	Peak-Average Ratio	127
7.7	Radiated Power (EIRP).....	176
7.8	Radiated Spurious Emissions Measurements.....	259
7.9	Frequency Stability / Temperature Variation	265
8.0	CONCLUSION.....	294

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 2 of 294

PART 27 MEASUREMENT REPORT

Antenna F							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator	
				Max. Power [W]	Max. Power [dBm]		
NR Band n77 PC2 (3450 - 3550MHz)	100 MHz	π/2 BPSK	3500.0	0.176	22.46	96M6G7D	
		QPSK	3500.0	0.169	22.27	97M9G7D	
		16QAM	3500.0	0.141	21.50	97M7W7D	
	90 MHz	π/2 BPSK	3495.0 - 3505.0	0.192	22.83	87M4G7D	
		QPSK	3495.0 - 3505.0	0.180	22.55	87M7G7D	
		16QAM	3495.0 - 3505.0	0.175	22.42	87M8W7D	
	80 MHz	π/2 BPSK	3490.0 - 3510.0	0.181	22.58	77M4G7D	
		QPSK	3490.0 - 3510.0	0.179	22.53	77M7G7D	
		16QAM	3490.0 - 3510.0	0.185	22.67	77M8W7D	
	70 MHz	π/2 BPSK	3485.0 - 3515.0	0.196	22.92	64M7G7D	
		QPSK	3485.0 - 3515.0	0.192	22.83	67M6G7D	
		16QAM	3485.0 - 3515.0	0.175	22.42	67M8W7D	
	60 MHz	π/2 BPSK	3480.0 - 3520.0	0.208	23.17	58M1G7D	
		QPSK	3480.0 - 3520.0	0.194	22.87	58M1G7D	
		16QAM	3480.0 - 3520.0	0.168	22.25	57M9W7D	
	50 MHz	π/2 BPSK	3475.0 - 3525.0	0.192	22.82	45M9G7D	
		QPSK	3475.0 - 3525.0	0.180	22.55	47M6G7D	
		16QAM	3475.0 - 3525.0	0.145	21.61	47M8W7D	
	40 MHz	π/2 BPSK	3470.0 - 3530.0	0.206	23.13	36M0G7D	
		QPSK	3470.0 - 3530.0	0.193	22.86	38M0G7D	
		16QAM	3470.0 - 3530.0	0.197	22.93	38M1W7D	
	30 MHz	π/2 BPSK	3465.0 - 3535.0	0.208	23.17	27M0G7D	
		QPSK	3465.0 - 3535.0	0.200	23.00	28M0G7D	
		16QAM	3465.0 - 3535.0	0.188	22.75	28M0W7D	
	20 MHz	π/2 BPSK	3460.0 - 3540.0	0.212	23.26	18M0G7D	
		QPSK	3460.0 - 3540.0	0.197	22.95	18M4G7D	
		16QAM	3460.0 - 3540.0	0.194	22.88	18M3W7D	
	15 MHz	π/2 BPSK	3457.5 - 3542.5	0.213	23.27	13M0G7D	
		QPSK	3457.5 - 3542.5	0.193	22.86	13M6G7D	
		16QAM	3457.5 - 3542.5	0.198	22.97	13M6W7D	
	10 MHz	π/2 BPSK	3455.0 - 3545.0	0.198	22.96	8M61G7D	
		QPSK	3455.0 - 3545.0	0.193	22.85	8M66G7D	
		16QAM	3455.0 - 3545.0	0.191	22.80	8M69W7D	
	NR Band n77 PC2 (3700 - 3980MHz)	100 MHz	π/2 BPSK	3750.0 - 3930.0	0.270	24.31	97M0G7D
			QPSK	3750.0 - 3930.0	0.250	23.98	97M8G7D
			16QAM	3750.0 - 3930.0	0.175	22.43	97M6W7D
90 MHz		π/2 BPSK	3745.0 - 3935.0	0.278	24.45	87M2G7D	
		QPSK	3745.0 - 3935.0	0.249	23.97	87M7G7D	
		16QAM	3745.0 - 3935.0	0.148	21.69	87M9W7D	
80 MHz		π/2 BPSK	3740.0 - 3940.0	0.290	24.63	77M4G7D	
		QPSK	3740.0 - 3940.0	0.255	24.07	77M6G7D	
		16QAM	3740.0 - 3940.0	0.179	22.53	77M7W7D	
70 MHz		π/2 BPSK	3735.0 - 3945.0	0.276	24.41	64M5G7D	
		QPSK	3735.0 - 3945.0	0.264	24.21	67M8G7D	
		16QAM	3735.0 - 3945.0	0.144	21.58	67M7W7D	
60 MHz		π/2 BPSK	3730.0 - 3950.0	0.288	24.60	58M1G7D	
		QPSK	3730.0 - 3950.0	0.271	24.33	58M0G7D	
		16QAM	3730.0 - 3950.0	0.169	22.29	58M0W7D	
50 MHz		π/2 BPSK	3725.0 - 3955.0	0.285	24.55	45M9G7D	
		QPSK	3725.0 - 3955.0	0.264	24.22	47M8G7D	
		16QAM	3725.0 - 3955.0	0.174	22.40	47M6W7D	
40 MHz		π/2 BPSK	3720.0 - 3960.0	0.286	24.56	36M0G7D	
		QPSK	3720.0 - 3960.0	0.274	24.38	37M9G7D	
		16QAM	3720.0 - 3960.0	0.170	22.30	38M0W7D	
30 MHz		π/2 BPSK	3715.0 - 3965.0	0.274	24.38	27M0G7D	
		QPSK	3715.0 - 3965.0	0.276	24.41	28M0G7D	
		16QAM	3715.0 - 3965.0	0.186	22.70	28M0W7D	
20 MHz		π/2 BPSK	3710.0 - 3970.0	0.296	24.71	18M0G7D	
		QPSK	3710.0 - 3970.0	0.267	24.26	18M3G7D	
		16QAM	3710.0 - 3970.0	0.186	22.70	18M3W7D	
15 MHz		π/2 BPSK	3707.5 - 3972.5	0.272	24.35	12M9G7D	
		QPSK	3707.5 - 3972.5	0.257	24.09	13M7G7D	
		16QAM	3707.5 - 3972.5	0.176	22.45	13M7W7D	
10 MHz		π/2 BPSK	3705.0 - 3975.0	0.274	24.38	8M64G7D	
		QPSK	3705.0 - 3975.0	0.261	24.16	8M66G7D	
			16QAM	3705.0 - 3975.0	0.167	22.22	8M67W7D

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 3 of 294

Antenna E							
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator	
				Max. Power [W]	Max. Power [dBm]		
NR Band n77 PC2 (3450 - 3550MHz)	100 MHz	$\pi/2$ BPSK	3500.0	0.113	20.53	96M8G7D	
		QPSK	3500.0	0.122	20.85	98M2G7D	
		16QAM	3500.0	0.109	20.38	98M0W7D	
	90 MHz	$\pi/2$ BPSK	3495.0 - 3505.0	0.117	20.67	87M0G7D	
		QPSK	3495.0 - 3505.0	0.131	21.18	88M1G7D	
		16QAM	3495.0 - 3505.0	0.102	20.09	88M2W7D	
	80 MHz	$\pi/2$ BPSK	3490.0 - 3510.0	0.123	20.89	77M5G7D	
		QPSK	3490.0 - 3510.0	0.134	21.26	78M0G7D	
		16QAM	3490.0 - 3510.0	0.108	20.32	77M7W7D	
	70 MHz	$\pi/2$ BPSK	3485.0 - 3515.0	0.142	21.51	64M8G7D	
		QPSK	3485.0 - 3515.0	0.148	21.71	68M1G7D	
		16QAM	3485.0 - 3515.0	0.134	21.26	68M1W7D	
	60 MHz	$\pi/2$ BPSK	3480.0 - 3520.0	0.120	20.79	58M2G7D	
		QPSK	3480.0 - 3520.0	0.131	21.16	58M4G7D	
		16QAM	3480.0 - 3520.0	0.103	20.15	58M3W7D	
	50 MHz	$\pi/2$ BPSK	3475.0 - 3525.0	0.113	20.52	46M0G7D	
		QPSK	3475.0 - 3525.0	0.127	21.03	47M9G7D	
		16QAM	3475.0 - 3525.0	0.105	20.21	47M9W7D	
	40 MHz	$\pi/2$ BPSK	3470.0 - 3530.0	0.129	21.11	36M0G7D	
		QPSK	3470.0 - 3530.0	0.140	21.46	38M2G7D	
		16QAM	3470.0 - 3530.0	0.113	20.53	38M2W7D	
	30 MHz	$\pi/2$ BPSK	3465.0 - 3535.0	0.126	21.00	27M1G7D	
		QPSK	3465.0 - 3535.0	0.135	21.32	28M3G7D	
		16QAM	3465.0 - 3535.0	0.111	20.44	28M2W7D	
	20 MHz	$\pi/2$ BPSK	3460.0 - 3540.0	0.129	21.11	18M0G7D	
		QPSK	3460.0 - 3540.0	0.130	21.13	18M4G7D	
		16QAM	3460.0 - 3540.0	0.108	20.34	18M4W7D	
	15 MHz	$\pi/2$ BPSK	3457.5 - 3542.5	0.127	21.04	13M0G7D	
		QPSK	3457.5 - 3542.5	0.128	21.09	13M8G7D	
		16QAM	3457.5 - 3542.5	0.135	21.30	13M7W7D	
	10 MHz	$\pi/2$ BPSK	3455.0 - 3545.0	0.129	21.09	8M6G7D	
		QPSK	3455.0 - 3545.0	0.145	21.61	8M75G7D	
		16QAM	3455.0 - 3545.0	0.116	20.64	8M68W7D	
	NR Band n77 PC2 (3700 - 3980MHz)	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.163	22.12	96M8G7D
			QPSK	3750.0 - 3930.0	0.180	22.56	98M1G7D
			16QAM	3750.0 - 3930.0	0.121	20.84	97M8W7D
90 MHz		$\pi/2$ BPSK	3745.0 - 3935.0	0.101	20.04	87M3G7D	
		QPSK	3745.0 - 3935.0	0.105	20.22	88M1G7D	
		16QAM	3745.0 - 3935.0	0.079	18.98	88M1W7D	
80 MHz		$\pi/2$ BPSK	3740.0 - 3940.0	0.097	19.88	77M3G7D	
		QPSK	3740.0 - 3940.0	0.119	20.77	77M9G7D	
		16QAM	3740.0 - 3940.0	0.084	19.23	77M9W7D	
70 MHz		$\pi/2$ BPSK	3735.0 - 3945.0	0.101	20.05	64M7G7D	
		QPSK	3735.0 - 3945.0	0.113	20.51	67M9G7D	
		16QAM	3735.0 - 3945.0	0.104	20.15	67M9W7D	
60 MHz		$\pi/2$ BPSK	3730.0 - 3950.0	0.097	19.85	58M0G7D	
		QPSK	3730.0 - 3950.0	0.117	20.69	58M4G7D	
		16QAM	3730.0 - 3950.0	0.077	18.85	58M2W7D	
50 MHz		$\pi/2$ BPSK	3725.0 - 3955.0	0.196	22.93	46M3G7D	
		QPSK	3725.0 - 3955.0	0.214	23.30	47M8G7D	
		16QAM	3725.0 - 3955.0	0.166	22.20	47M8W7D	
40 MHz		$\pi/2$ BPSK	3720.0 - 3960.0	0.203	23.06	35M8G7D	
		QPSK	3720.0 - 3960.0	0.222	23.47	38M0G7D	
		16QAM	3720.0 - 3960.0	0.140	21.46	38M0W7D	
30 MHz		$\pi/2$ BPSK	3715.0 - 3965.0	0.183	22.62	27M0G7D	
		QPSK	3715.0 - 3965.0	0.233	23.68	28M1G7D	
		16QAM	3715.0 - 3965.0	0.153	21.85	28M1W7D	
20 MHz		$\pi/2$ BPSK	3710.0 - 3970.0	0.199	22.98	18M0G7D	
		QPSK	3710.0 - 3970.0	0.248	23.95	18M3G7D	
		16QAM	3710.0 - 3970.0	0.139	21.43	18M4W7D	
15 MHz		$\pi/2$ BPSK	3707.5 - 3972.5	0.201	23.03	13M0G7D	
		QPSK	3707.5 - 3972.5	0.251	23.99	13M7G7D	
		16QAM	3707.5 - 3972.5	0.138	21.39	13M7W7D	
10 MHz		$\pi/2$ BPSK	3705.0 - 3975.0	0.228	23.58	8M76G7D	
		QPSK	3705.0 - 3975.0	0.267	24.26	8M66G7D	
			16QAM	3705.0 - 3975.0	0.150	21.77	8M67W7D

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 4 of 294

Antenna G						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC2 (3450 - 3550MHz)	100 MHz	$\pi/2$ BPSK	3500.0	0.027	14.24	96M8G7D
		QPSK	3500.0	0.026	14.17	98M1G7D
		16QAM	3500.0	0.025	13.99	97M7W7D
NR Band n77 PC2 (3700 - 3980MHz)	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.042	16.26	97M0G7D
		QPSK	3750.0 - 3930.0	0.043	16.30	97M9G7D
		16QAM	3750.0 - 3930.0	0.036	15.56	97M9W7D

Antenna D						
Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
NR Band n77 PC2 (3450 - 3550MHz)	100 MHz	$\pi/2$ BPSK	3500.0	0.082	19.16	96M6G7D
		QPSK	3500.0	0.075	18.78	97M8G7D
		16QAM	3500.0	0.055	17.43	97M8W7D
NR Band n77 PC2 (3700 - 3980MHz)	100 MHz	$\pi/2$ BPSK	3750.0 - 3930.0	0.045	16.56	96M3G7D
		QPSK	3750.0 - 3930.0	0.045	16.55	98M1G7D
		16QAM	3750.0 - 3930.0	0.038	15.80	98M2W7D

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 5 of 294

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element Lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 6 of 294

V3.0 1/6/2022

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMF936U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 27.

Test Device Serial No.: 0058M, 1782M, 1799M, 3890M, 3884M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR (FR1 and FR2), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5,6GHz), Bluetooth (1x, EDR, LE), NFC, UWB, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

The device has 2 Tx antennas for n77 data (Ant F, Ant E) and 2 Rx antennas (Ant G, Ant D). With SRS operations, all 4 antennas can transmit the SRS signal to check for the channel quality of n77. The antennas cannot simultaneously transmit. Only the single TX/RX antenna is used for Data transmission.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports two configurations: one is with screen open and one is with screen closed. Open, half opened and closed configurations are tested, and the worst case radiated emissions data is shown in this report.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version F936USQU0AVEC installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 7 of 294

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 8 of 294

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 9 of 294

V3.0 1/6/2022

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx1	Licensed Transmitter Cable Set	12/9/2021	Annual	12/9/2022	LTx1
-	LTx2	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx2
-	LTx3	Licensed Transmitter Cable Set	8/18/2021	Annual	8/18/2022	LTx3
-	LTx4	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx4
-	LTx5	Licensed Transmitter Cable Set	12/19/2021	Annual	12/19/2022	LTx5
Agilent	N9020A	MXA Signal Analyzer	3/4/2022	Annual	3/4/2023	US46470561
Agilent	N9038A	MXE EMI Receiver	1/21/2022	Annual	1/21/2023	MY51210133
Anritsu	MT8820C	Radio Communication Analyzer	N/A			6201300731
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201381794
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6200901190
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Espec	ESX-2CA	Environmental Chamber	5/25/2022	Annual	5/25/2023	17620
Keysight Technologies	N9030A	PXA Signal Analyzer (3Hz-26.5GHz)	2/14/2022	Annual	2/14/2023	MY54490576
Keysight Technologies	N9020A	MXA Signal Analyzer	3/15/2022	Annual	3/15/2023	MY54500644
Mini Circuits	TVA-11-422	RF Power Amp	N/A			QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			100976
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			102060
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	5/25/2021	Annual	5/25/2022	100348
Rohde & Schwarz	FSW67	Signal / Spectrum Analyzer	8/25/2021	Annual	8/25/2022	103200
Sunol	DRH-118	Horn Antenna (1-18GHz)	2/14/2022	Biennial	2/14/2024	A050307
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 5-1. Test Equipment

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 10 of 294

6.0 SAMPLE CALCULATIONS

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission

Example: Spurious emission at 3700.40 MHz

The receive spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 3700.40 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.50 dBm so this harmonic was 25.50 dBm $- (-24.80) = 50.3$ dBc.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 11 of 294

V3.0 1/6/2022

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMF936U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): NR

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Transmitter Conducted Output Power	2.1046(a), 2.1046(c)	N/A	PASS	Section 7.2
	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.3
	Conducted Band Edge / Spurious Emissions (NR Band n77)	2.1051, 27.53(l), 27.53(n)	≤ 13 dBm / MHz	PASS	Sections 7.4, 7.5
	Peak-to-Average Ratio (NR Band n77)	27.53(j)(4), 27.53(k)(4)	≤ 13 dB	PASS	Section 7.6
	Frequency Stability	2.1055, 27.54	Fundamental emissions stay within authorized frequency block.	PASS	Section 7.9
RADIATED	Effective Radiated Power / Equivalent Isotropic Radiated Power (NR Band n77)	27.53(j)(3), 27.53(k)(3)	≤ 1 Watt EIRP	PASS	Section 7.7
	Radiated Spurious Emissions (NR Band n77)	2.1053, 27.53(l), 27.53(n)	≤ 13 dBm / MHz	PASS	Section 7.8

* The only transmitter output conducted powers included in this report are those where the Pmax value, per the tune-up document, is higher than any of the DSI power levels. For the remaining conducted power measurements, see the **RF Exposure Report**.

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) All conducted emissions measurements are performed with automated test software to capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.1.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 12 of 294

7.2 Conducted Output Power Data

Test Overview

All emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.2

Test Settings

1. Span = 2 x OBW to 3 x OBW
2. Detector = RMS
3. Trace mode = trace average for continuous emissions, max hold for pulse emissions
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

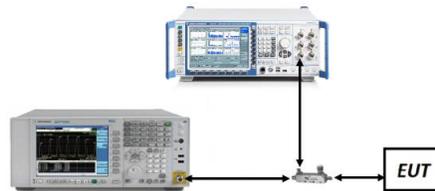


Figure 7-1. Test Instrument & Measurement Setup

Test Notes

1. Conducted power measurements were evaluated using various combinations of RB size, RB offset, modulation, and channel bandwidth. Channel bandwidth data is shown in the tables below based only on the channel bandwidths that were supported in this device.
2. All other conducted power measurements are contained in the RF exposure report for this filing.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 13 of 294

V3.0 1/6/2022

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 204	26.16
	QPSK	633334	3500.01	1 / 204	26.25
	16-QAM	633334	3500.01	1 / 136	24.88
90 MHz	$\pi/2$ BPSK	633000	3495.00	1 / 61	26.20
		633334	3500.01	1 / 183	26.53
		633666	3504.99	1 / 183	26.12
	QPSK	633000	3495.00	1 / 183	26.12
		633334	3500.01	1 / 61	26.53
		633666	3504.99	1 / 183	26.29
16-QAM	633000	3495.00	1 / 183	25.80	
80 MHz	$\pi/2$ BPSK	632668	3490.02	1 / 108	26.27
		633334	3500.01	1 / 54	26.28
		634000	3510.00	1 / 108	26.26
	QPSK	632668	3490.02	1 / 54	26.25
		633334	3500.01	1 / 54	26.32
		634000	3510.00	1 / 162	26.51
16-QAM	633334	3500.01	1 / 162	26.05	
70 MHz	$\pi/2$ BPSK	632334	3485.01	1 / 47	26.62
		633334	3500.01	1 / 94	26.08
		634332	3514.98	1 / 141	26.34
	QPSK	632334	3485.01	1 / 94	26.02
		633334	3500.01	1 / 47	26.15
		634332	3514.98	1 / 141	26.81
16-QAM	632334	3485.01	1 / 47	25.80	
60 MHz	$\pi/2$ BPSK	632000	3480.00	1 / 81	26.38
		633334	3500.01	1 / 40	26.49
		634666	3519.99	1 / 121	26.87
	QPSK	632000	3480.00	1 / 121	26.68
		633334	3500.01	1 / 40	26.85
		634666	3519.99	1 / 121	26.52
16-QAM	634666	3519.99	1 / 121	25.64	
50 MHz	$\pi/2$ BPSK	631668	3475.02	1 / 66	26.47
		633334	3500.01	1 / 66	26.35
		635000	3525.00	1 / 66	26.52
	QPSK	631668	3475.02	1 / 33	26.48
		633334	3500.01	1 / 33	26.52
		635000	3525.00	1 / 33	26.47
16-QAM	635000	3525.00	1 / 99	24.99	
40 MHz	$\pi/2$ BPSK	631334	3470.01	1 / 26	26.58
		633334	3500.01	1 / 53	26.83
		635332	3529.98	1 / 79	26.67
	QPSK	631334	3470.01	1 / 53	26.51
		633334	3500.01	1 / 53	26.78
		635332	3529.98	1 / 79	26.83
16-QAM	635332	3529.98	1 / 79	26.32	
30 MHz	$\pi/2$ BPSK	631000	3465.00	1 / 58	26.72
		633334	3500.01	1 / 58	26.67
		635666	3534.99	1 / 58	26.87
	QPSK	631000	3465.00	1 / 58	26.97
		633334	3500.01	1 / 58	26.96
		635666	3534.99	1 / 19	26.98
16-QAM	631000	3465.00	1 / 58	26.14	
20 MHz	$\pi/2$ BPSK	630668	3460.02	1 / 13	26.11
		633334	3500.01	1 / 25	26.90
		636000	3540.00	1 / 25	26.96
	QPSK	630668	3460.02	1 / 25	26.49
		633334	3500.01	1 / 37	26.74
		636000	3540.00	1 / 37	26.93
16-QAM	636000	3540.00	1 / 13	26.26	
15 MHz	$\pi/2$ BPSK	630500	3457.50	1 / 28	26.85
		633334	3500.01	1 / 28	26.76
		636166	3542.49	1 / 9	26.98
	QPSK	630500	3457.50	1 / 9	26.55
		633334	3500.01	1 / 9	26.55
		636166	3542.49	1 / 9	26.84
16-QAM	636166	3542.49	1 / 19	26.35	
10 MHz	$\pi/2$ BPSK	630334	3455.01	1 / 6	26.42
		633334	3500.01	1 / 6	26.66
		636332	3544.98	1 / 17	26.26
	QPSK	630334	3455.01	1 / 12	26.48
		633334	3500.01	1 / 17	26.83
		636332	3544.98	1 / 12	26.79
16-QAM	630334	3455.01	1 / 6	26.19	

Table 7-2. Conducted Max Powers (NR Band n77 – DoD Band – SRS-1 – Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 14 of 294

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 204	26.70
		656000	3840.00	1 / 68	26.73
		662000	3930.00	1 / 136	26.45
	QPSK	650000	3750.00	1 / 204	26.38
		656000	3840.00	1 / 204	26.23
		662000	3930.00	1 / 68	26.56
16-QAM	662000	3930.00	1 / 136	25.87	
90 MHz	π/2 BPSK	649668	3745.02	1 / 183	26.93
		656000	3840.00	1 / 183	26.85
		662332	3934.98	1 / 183	26.59
	QPSK	649668	3745.02	1 / 183	26.65
		656000	3840.00	1 / 183	26.55
		662332	3934.98	1 / 122	26.54
16-QAM	662332	3934.98	1 / 122	25.12	
80 MHz	π/2 BPSK	649334	3740.01	1 / 54	26.87
		656000	3840.00	1 / 54	26.87
		662666	3939.99	1 / 54	26.77
	QPSK	649334	3740.01	1 / 108	26.60
		656000	3840.00	1 / 162	26.34
		662666	3939.99	1 / 108	26.64
16-QAM	662666	3939.99	1 / 54	25.96	
70 MHz	π/2 BPSK	649000	3735.00	1 / 141	26.64
		656000	3840.00	1 / 141	26.88
		663000	3945.00	1 / 141	26.54
	QPSK	649000	3735.00	1 / 47	26.69
		656000	3840.00	1 / 141	26.99
		663000	3945.00	1 / 47	26.78
16-QAM	663000	3945.00	1 / 94	25.02	
60 MHz	π/2 BPSK	648668	3730.02	1 / 40	26.88
		656000	3840.00	1 / 40	26.84
		663332	3949.98	1 / 40	26.74
	QPSK	648668	3730.02	1 / 40	26.98
		656000	3840.00	1 / 40	26.99
		663332	3949.98	1 / 40	26.91
16-QAM	663332	3949.98	1 / 81	25.72	
50 MHz	π/2 BPSK	648334	3725.01	1 / 66	26.94
		656000	3840.00	1 / 66	26.95
		663666	3954.99	1 / 66	26.68
	QPSK	648334	3725.01	1 / 66	26.99
		656000	3840.00	1 / 33	26.78
		663666	3954.99	1 / 66	26.80
16-QAM	663666	3954.99	1 / 33	25.83	
40 MHz	π/2 BPSK	648000	3720.00	1 / 53	26.98
		656000	3840.00	1 / 53	26.94
		664000	3960.00	1 / 26	26.69
	QPSK	648000	3720.00	1 / 79	26.97
		656000	3840.00	1 / 79	26.78
		664000	3960.00	1 / 53	26.96
16-QAM	664000	3960.00	1 / 26	25.73	
30 MHz	π/2 BPSK	647668	3715.02	1 / 19	26.85
		656000	3840.00	1 / 58	26.75
		664332	3964.98	1 / 19	26.94
	QPSK	647668	3715.02	1 / 19	26.76
		656000	3840.00	1 / 39	26.98
		664332	3964.98	1 / 39	26.98
16-QAM	664332	3964.98	1 / 19	25.77	
20 MHz	π/2 BPSK	647334	3710.01	1 / 37	26.98
		656000	3840.00	1 / 37	26.70
		664666	3969.99	1 / 13	26.85
	QPSK	647334	3710.01	1 / 37	26.87
		656000	3840.00	1 / 37	26.84
		664666	3969.99	1 / 37	26.84
16-QAM	664666	3969.99	1 / 37	26.13	
15 MHz	π/2 BPSK	647168	3707.52	1 / 28	26.64
		656000	3840.00	1 / 9	26.48
		664832	3972.48	1 / 28	26.48
	QPSK	647168	3707.52	1 / 19	26.63
		656000	3840.00	1 / 19	26.86
		664832	3972.48	1 / 28	26.67
16-QAM	664832	3972.48	1 / 9	25.88	
10 MHz	π/2 BPSK	647000	3705.00	1 / 6	26.69
		656000	3840.00	1 / 6	26.47
		664332	3975.00	1 / 6	26.52
	QPSK	647000	3705.00	1 / 6	26.74
		656000	3840.00	1 / 17	26.78
		664332	3975.00	1 / 17	26.74
16-QAM	664332	3975.00	1 / 12	25.66	

Table 7-3. Conducted Max Powers (NR Band n77 – C-Band – SRS-1 – Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 15 of 294

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 204	24.96
	QPSK	633334	3500.01	1 / 204	24.99
	16-QAM	633334	3500.01	1 / 136	24.57
90 MHz	$\pi/2$ BPSK	633000	3495.00	1 / 183	25.10
		633334	3500.01	1 / 183	25.01
		633666	3504.99	1 / 183	25.08
	QPSK	633000	3495.00	1 / 183	25.32
		633334	3500.01	1 / 183	25.28
		633666	3504.99	1 / 183	25.30
16-QAM	633334	3500.01	1 / 183	24.28	
80 MHz	$\pi/2$ BPSK	632668	3490.02	1 / 162	25.17
		633334	3500.01	1 / 162	25.19
		634000	3510.00	1 / 162	25.32
	QPSK	632668	3490.02	1 / 162	25.24
		633334	3500.01	1 / 162	25.40
		634000	3510.00	1 / 162	25.38
16-QAM	634000	3510.00	1 / 162	24.51	
70 MHz	$\pi/2$ BPSK	632334	3485.01	1 / 141	25.68
		633334	3500.01	1 / 141	25.75
		634332	3514.98	1 / 141	25.94
	QPSK	632334	3485.01	1 / 141	25.85
		633334	3500.01	1 / 141	25.70
		634332	3514.98	1 / 141	25.73
16-QAM	634332	3514.98	1 / 141	25.45	
60 MHz	$\pi/2$ BPSK	632000	3480.00	1 / 121	24.93
		633334	3500.01	1 / 81	25.22
		634666	3519.99	1 / 121	25.17
	QPSK	632000	3480.00	1 / 121	25.14
		633334	3500.01	1 / 81	25.21
		634666	3519.99	1 / 81	25.30
16-QAM	634666	3519.99	1 / 81	24.34	
50 MHz	$\pi/2$ BPSK	631668	3475.02	1 / 99	24.83
		633334	3500.01	1 / 99	24.89
		635000	3525.00	1 / 99	24.95
	QPSK	631668	3475.02	1 / 99	24.84
		633334	3500.01	1 / 33	25.04
		635000	3525.00	1 / 99	25.17
16-QAM	635000	3525.00	1 / 99	24.40	
40 MHz	$\pi/2$ BPSK	631334	3470.01	1 / 79	24.94
		633334	3500.01	1 / 79	25.27
		635332	3529.98	1 / 79	25.54
	QPSK	631334	3470.01	1 / 79	25.11
		633334	3500.01	1 / 79	25.36
		635332	3529.98	1 / 79	25.60
16-QAM	635332	3529.98	1 / 79	24.72	
30 MHz	$\pi/2$ BPSK	631000	3465.00	1 / 58	24.98
		633334	3500.01	1 / 58	25.26
		635666	3534.99	1 / 58	25.43
	QPSK	631000	3465.00	1 / 58	25.19
		633334	3500.01	1 / 58	25.36
		635666	3534.99	1 / 58	25.46
16-QAM	635666	3534.99	1 / 58	24.63	
20 MHz	$\pi/2$ BPSK	630668	3460.02	1 / 25	24.57
		633334	3500.01	1 / 37	25.04
		636000	3540.00	1 / 37	25.54
	QPSK	630668	3460.02	1 / 37	24.82
		633334	3500.01	1 / 25	25.08
		636000	3540.00	1 / 25	25.27
16-QAM	636000	3540.00	1 / 37	24.53	
15 MHz	$\pi/2$ BPSK	630500	3457.50	1 / 9	24.61
		633334	3500.01	1 / 9	25.12
		636166	3542.49	1 / 9	25.47
	QPSK	630500	3457.50	1 / 19	24.62
		633334	3500.01	1 / 19	25.20
		636166	3542.49	1 / 9	25.23
16-QAM	636166	3542.49	1 / 19	25.49	
10 MHz	$\pi/2$ BPSK	630334	3455.01	1 / 17	25.52
		633334	3500.01	1 / 17	25.51
		636332	3544.98	1 / 12	25.47
	QPSK	630334	3455.01	1 / 17	25.46
		633334	3500.01	1 / 17	25.46
		636332	3544.98	1 / 6	25.75
16-QAM	636332	3544.98	1 / 12	24.83	

Table 7-4. Conducted Max Powers (NR Band n77 – DoD Band – SRS-2 – Antenna E)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 16 of 294

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	π/2 BPSK	650000	3750.00	1 / 136	24.92
		656000	3840.00	1 / 68	25.18
		662000	3930.00	1 / 68	24.36
	QPSK	650000	3750.00	1 / 136	24.91
		656000	3840.00	1 / 136	25.04
		662000	3930.00	1 / 136	24.03
16-QAM	662000	3930.00	1 / 68	23.21	
90 MHz	π/2 BPSK	649668	3745.02	1 / 183	24.21
		656000	3840.00	1 / 61	24.16
		662332	3934.98	1 / 61	22.28
	QPSK	649668	3745.02	1 / 122	24.22
		656000	3840.00	1 / 122	24.31
		662332	3934.98	1 / 61	21.69
16-QAM	656000	3840.00	1 / 61	23.84	
80 MHz	π/2 BPSK	649334	3740.01	1 / 162	24.75
		656000	3840.00	1 / 54	24.52
		662666	3939.99	1 / 54	21.94
	QPSK	649334	3740.01	1 / 108	24.77
		656000	3840.00	1 / 108	24.87
		662666	3939.99	1 / 108	22.24
16-QAM	649334	3740.01	1 / 162	24.50	
70 MHz	π/2 BPSK	649000	3735.00	1 / 141	25.10
		656000	3840.00	1 / 94	24.69
		663000	3945.00	1 / 94	21.99
	QPSK	649000	3735.00	1 / 141	24.84
		656000	3840.00	1 / 94	24.64
		663000	3945.00	1 / 141	21.98
16-QAM	656000	3840.00	1 / 47	24.37	
60 MHz	π/2 BPSK	648668	3730.02	1 / 81	24.97
		656000	3840.00	1 / 81	24.49
		663332	3949.98	162 / 0	20.78
	QPSK	648668	3730.02	1 / 121	24.86
		656000	3840.00	1 / 40	25.19
		663332	3949.98	1 / 40	21.38
16-QAM	663332	3949.98	1 / 81	21.22	
50 MHz	π/2 BPSK	648334	3725.01	1 / 33	24.95
		656000	3840.00	1 / 33	25.16
		663666	3954.99	1 / 33	25.17
	QPSK	648334	3725.01	1 / 66	25.28
		656000	3840.00	1 / 33	25.13
		663666	3954.99	1 / 33	24.77
16-QAM	656000	3840.00	1 / 33	23.94	
40 MHz	π/2 BPSK	648000	3720.00	1 / 53	24.80
		656000	3840.00	1 / 26	25.12
		664000	3960.00	1 / 26	25.31
	QPSK	648000	3720.00	1 / 53	25.00
		656000	3840.00	1 / 53	25.24
		664000	3960.00	1 / 26	24.94
16-QAM	656000	3840.00	1 / 26	24.02	
30 MHz	π/2 BPSK	647668	3715.02	1 / 39	24.84
		656000	3840.00	1 / 39	24.94
		664332	3964.98	1 / 19	24.87
	QPSK	647668	3715.02	1 / 39	24.60
		656000	3840.00	1 / 39	25.28
		664332	3964.98	1 / 39	25.15
16-QAM	656000	3840.00	1 / 19	23.65	
20 MHz	π/2 BPSK	647334	3710.01	1 / 25	24.66
		656000	3840.00	1 / 13	24.68
		664666	3969.99	1 / 25	25.23
	QPSK	647334	3710.01	1 / 13	25.32
		656000	3840.00	1 / 13	25.98
		664666	3969.99	1 / 25	25.42
16-QAM	656000	3840.00	1 / 13	23.41	
15 MHz	π/2 BPSK	647168	3707.52	1 / 19	25.16
		656000	3840.00	1 / 19	25.44
		664832	3972.48	1 / 19	25.28
	QPSK	647168	3707.52	1 / 19	25.07
		656000	3840.00	1 / 19	25.25
		664832	3972.48	1 / 19	25.46
16-QAM	647168	3707.52	1 / 19	24.05	
10 MHz	π/2 BPSK	647000	3705.00	1 / 12	25.95
		656000	3840.00	1 / 12	26.28
		664332	3975.00	1 / 12	25.82
	QPSK	647000	3705.00	1 / 17	24.42
		656000	3840.00	1 / 6	24.99
		664332	3975.00	1 / 17	25.73
16-QAM	656000	3840.00	1 / 12	24.83	

Table 7-5. Conducted Max Powers (NR Band n77 – C-Band – SRS-2 – Antenna E)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 17 of 294

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 136	25.38
	QPSK	633334	3500.01	1 / 204	25.44
	16-QAM	633334	3500.01	1 / 204	25.20

Table 7-6. Conducted Max Powers (NR Band n77 – DoD Band – SRS-3 – Antenna G)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	650000	3750.00	1 / 204	25.93
		656000	3840.00	1 / 68	25.77
		662000	3930.00	1 / 136	25.84
	QPSK	650000	3750.00	1 / 136	25.80
		656000	3840.00	1 / 204	25.74
		662000	3930.00	1 / 136	25.71
	16-QAM	662000	3930.00	1 / 204	24.29

Table 7-7. Conducted Max Powers (NR Band n77 – C-Band – SRS-3 – Antenna G)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	633334	3500.01	1 / 204	21.43
	QPSK	633334	3500.01	1 / 204	21.57
	16-QAM	633334	3500.01	1 / 136	21.00

Table 7-8. Conducted Max Powers (NR Band n77 – DoD Band – SRS-4 – Antenna D)

Bandwidth	Modulation	Channel	Frequency [MHz]	RB Size/Offset	Conducted Power [dBm]
100 MHz	$\pi/2$ BPSK	650000	3750.00	1 / 68	21.60
		656000	3840.00	1 / 68	21.28
		662000	3930.00	1 / 68	19.63
	QPSK	650000	3750.00	1 / 68	21.19
		656000	3840.00	1 / 68	21.22
		662000	3930.00	1 / 68	19.20
	16-QAM	656000	3840.00	1 / 136	20.89

Table 7-9. Conducted Max Powers (NR Band n77 – C-Band – SRS-4 – Antenna D)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 18 of 294

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B13	10	Mid	782	QPSK	50/0	17.22	22.76	23.83
				QPSK	270/0					QPSK	1/25	17.20	22.73	23.80
				QPSK	1/136					QPSK	50/0	17.24	22.75	23.83
				QPSK	1/136					QPSK	1/25	17.25	22.78	23.85
				16Q	1/136					16Q	1/25	17.09	22.90	23.91

Table 7-10. Conducted Max Powers (EN-DC Combo n77 – B13)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B2	20	Mid	1880	QPSK	100/0	17.91	22.57	23.85
				QPSK	270/0					QPSK	1/50	17.99	23.10	24.27
				QPSK	1/136					QPSK	100/0	18.04	22.57	23.88
				QPSK	1/136					QPSK	1/50	18.01	22.72	23.98
				16Q	270/0					16Q	1/50	17.92	22.81	24.03

Table 7-11. Conducted Max Powers (EN-DC Combo n77 – B2)

NR (SCS 30kHz)						LTE						NR	LTE	EN-DC
NR Band	NR Bandwidth [MHz]	NR Channel	NR Frequency [MHz]	Mod.	NR RB#/Offset	LTE Band	LTE Bandwidth [MHz]	LTE Channel	LTE Frequency [MHz]	Mod.	LTE RB#/Offset	Conducted Power [dBm]	Conducted Power [dBm]	Total Tx. Power [dBm]
n77	100	Mid	3840	QPSK	270/0	B30	10	Mid	2310	QPSK	50/0	14.56	20.08	21.15
				QPSK	270/0					QPSK	1/25	14.68	20.15	21.23
				QPSK	1/136					QPSK	50/0	14.55	20.16	21.21
				QPSK	1/136					QPSK	1/25	14.55	20.29	21.32
				16Q	1/136					16Q	1/25	14.57	20.27	21.31

Table 7-12. Conducted Max Powers (EN-DC Combo n77 – B30)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 19 of 294

7.3 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

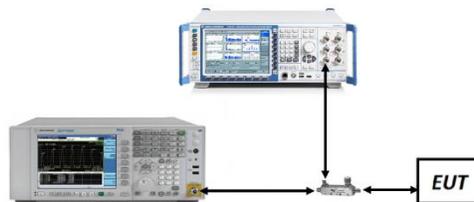




Figure 7-2. Test Instrument & Measurement Setup

Test Notes


None.

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 20 of 294


NR Band n77 (PC2) – DoD-Band – SRS-1 – Antenna F

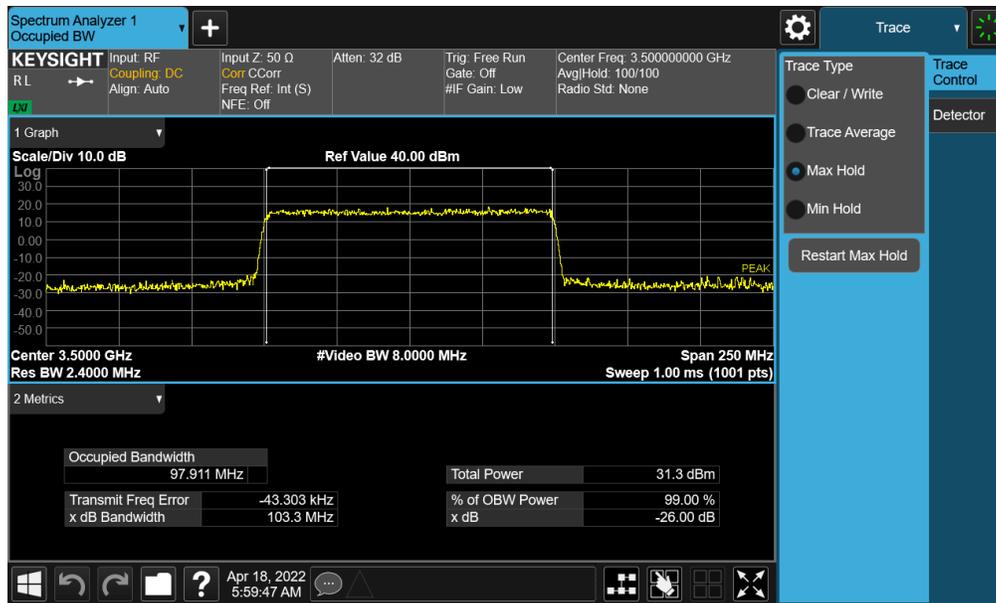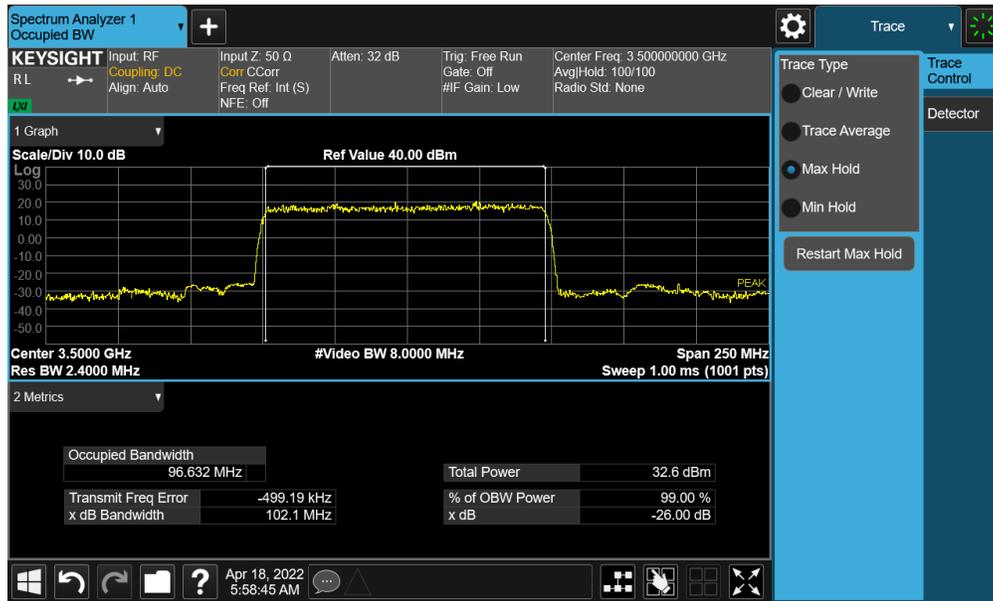

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 21 of 294

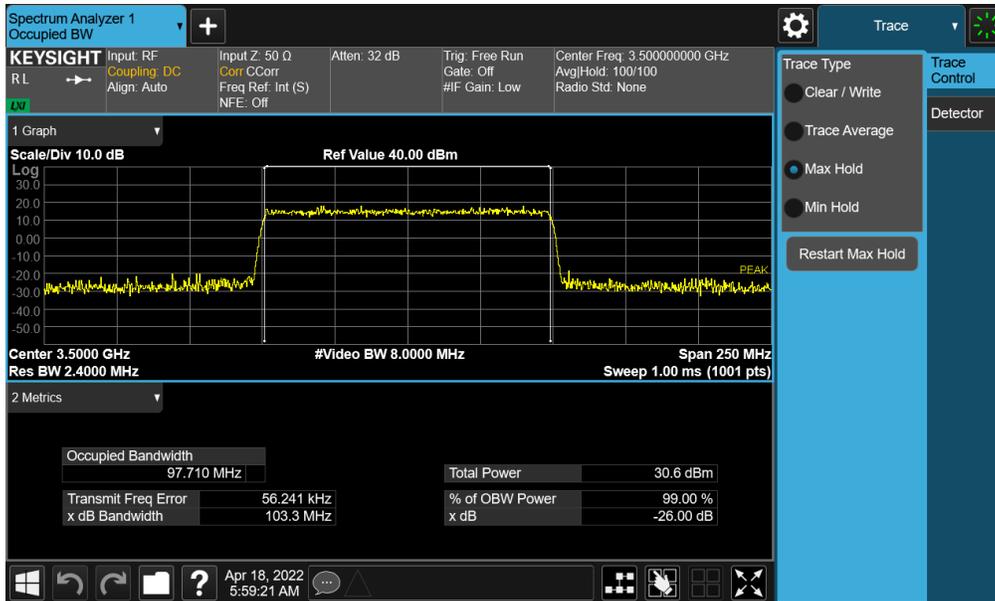


Plot 7-3. Occupied Bandwidth Plot (NR Band n77 (DoD) - 100MHz 16-QAM - Full RB - Antenna F)

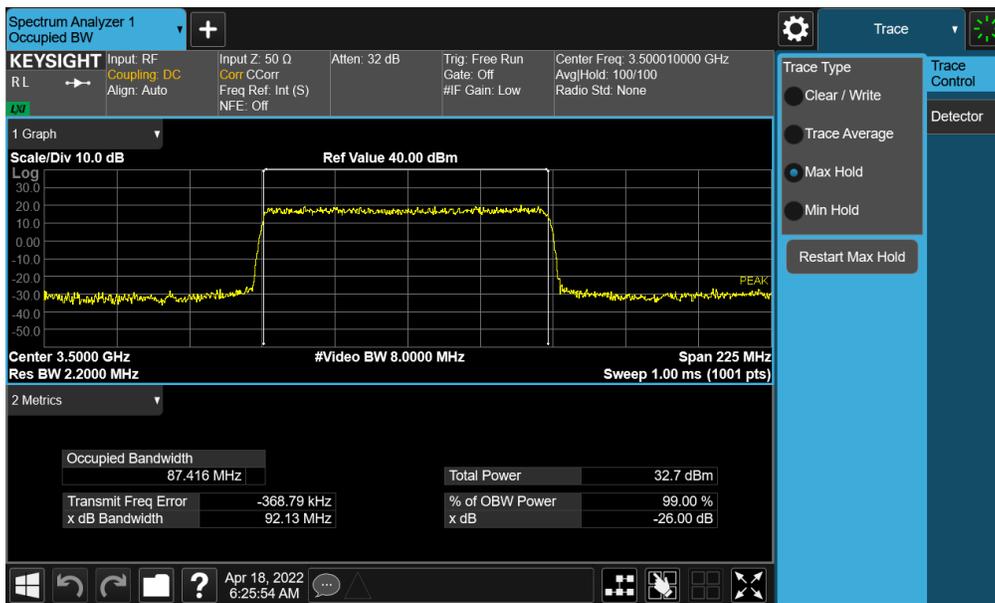


Plot 7-4. Occupied Bandwidth Plot (NR Band n77 (DoD) - 90MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 22 of 294


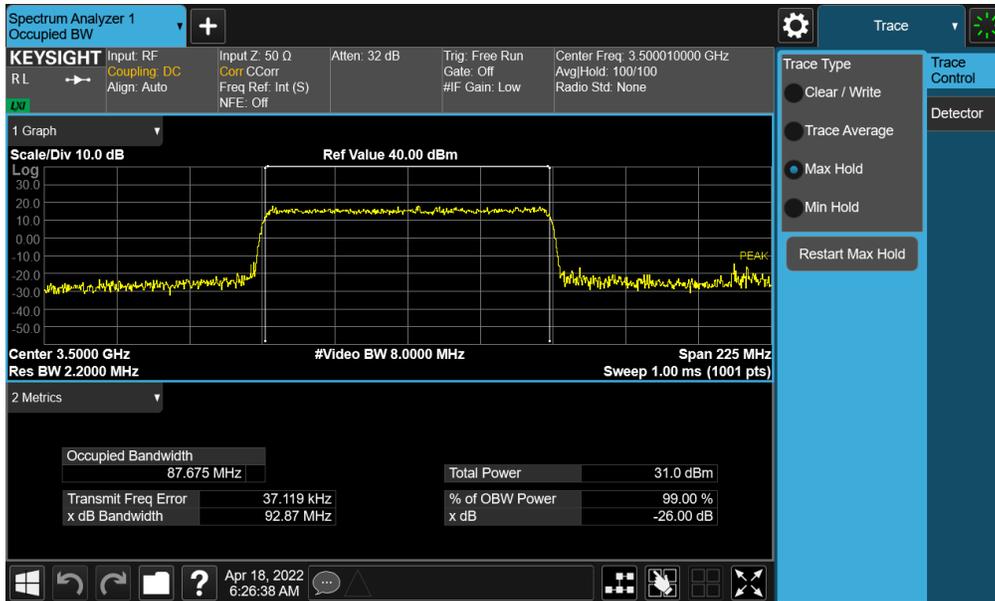


Plot 7-5. Occupied Bandwidth Plot (NR Band n77 (DoD) - 90MHz QPSK - Full RB - Antenna F)


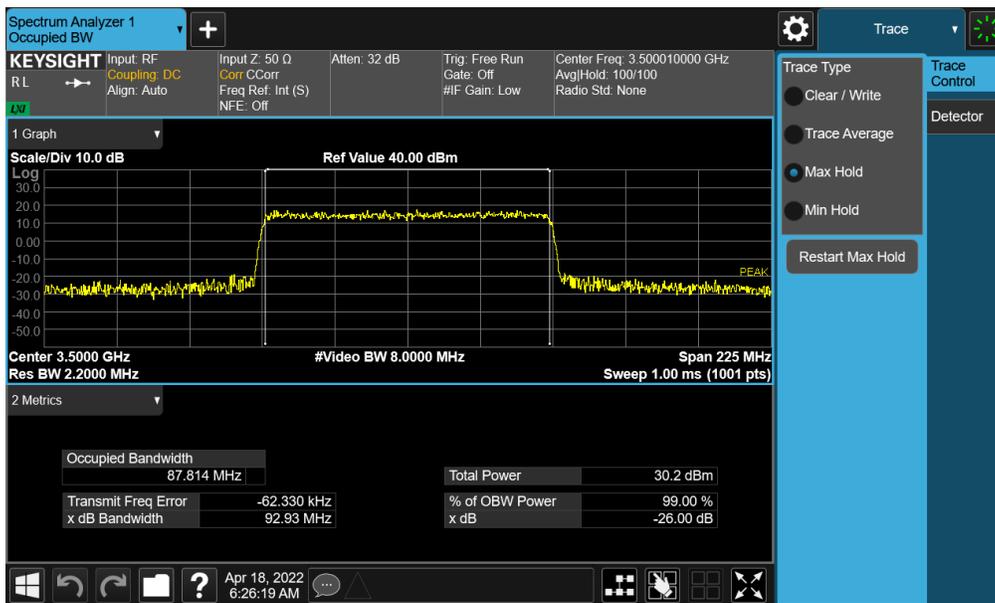


Plot 7-6. Occupied Bandwidth Plot (NR Band n77 (DoD) - 90MHz 16-QAM - Full RB - Antenna F)



FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 23 of 294

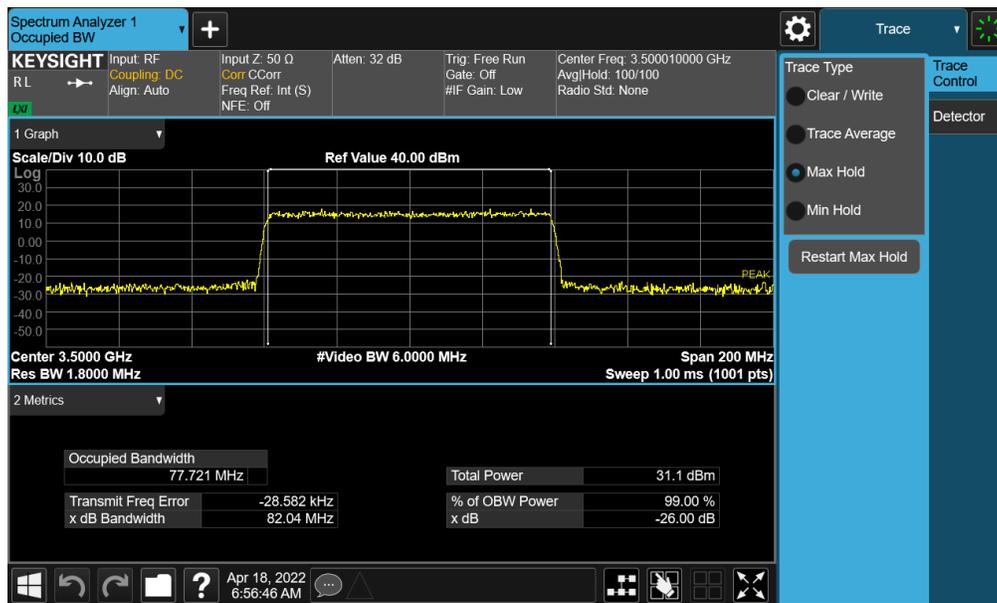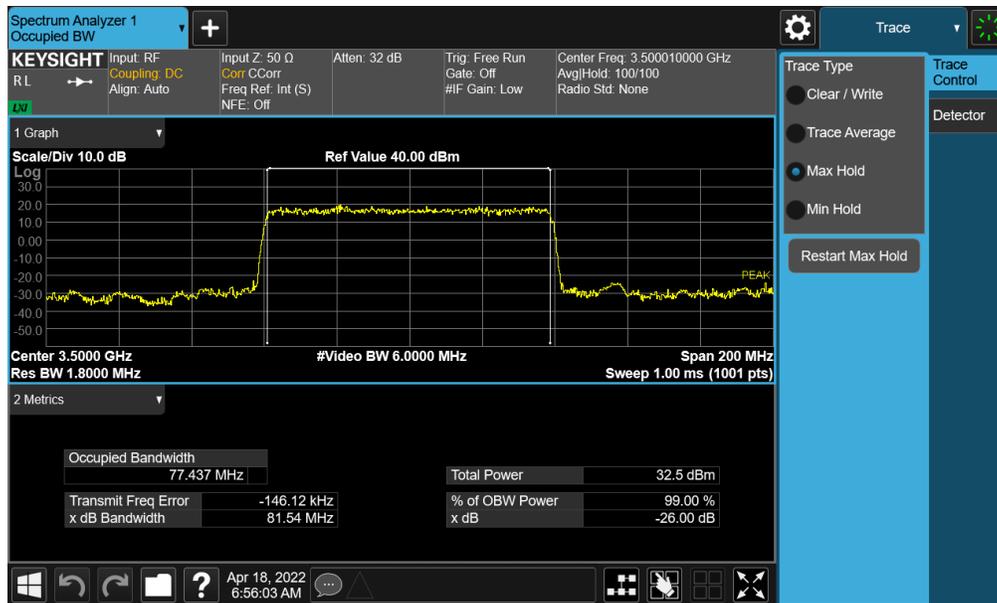


FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 24 of 294

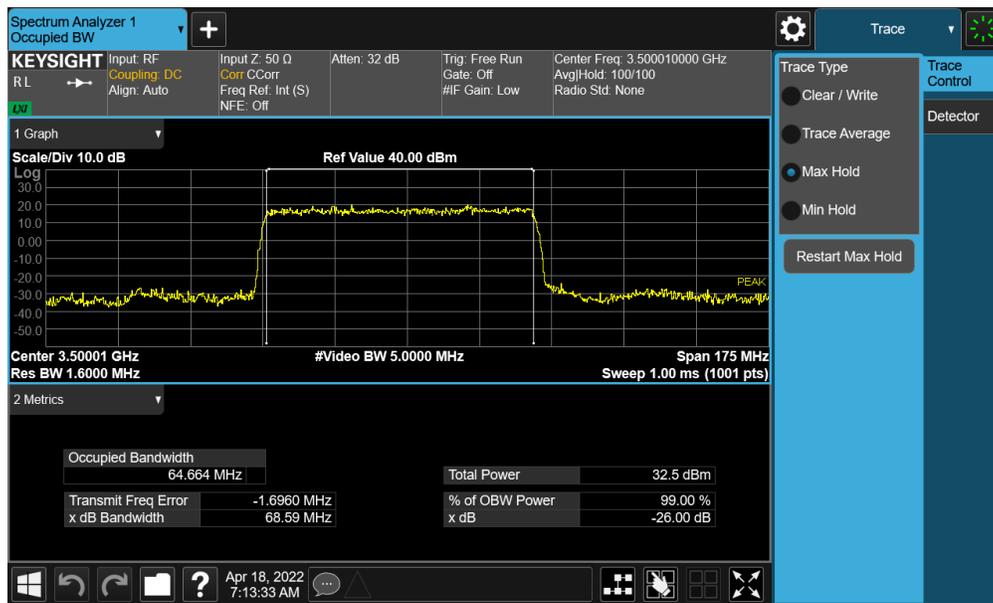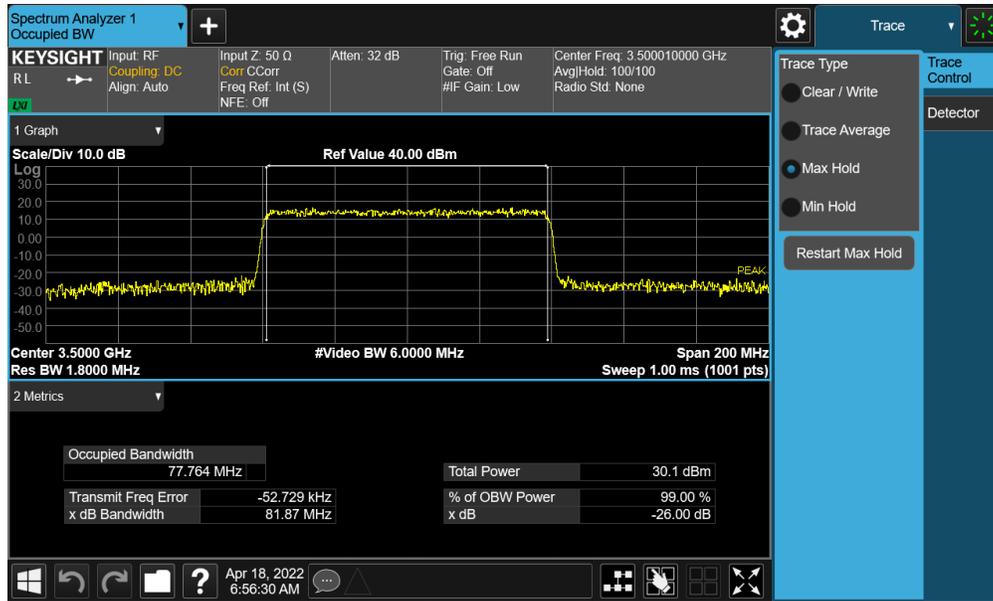


FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 25 of 294

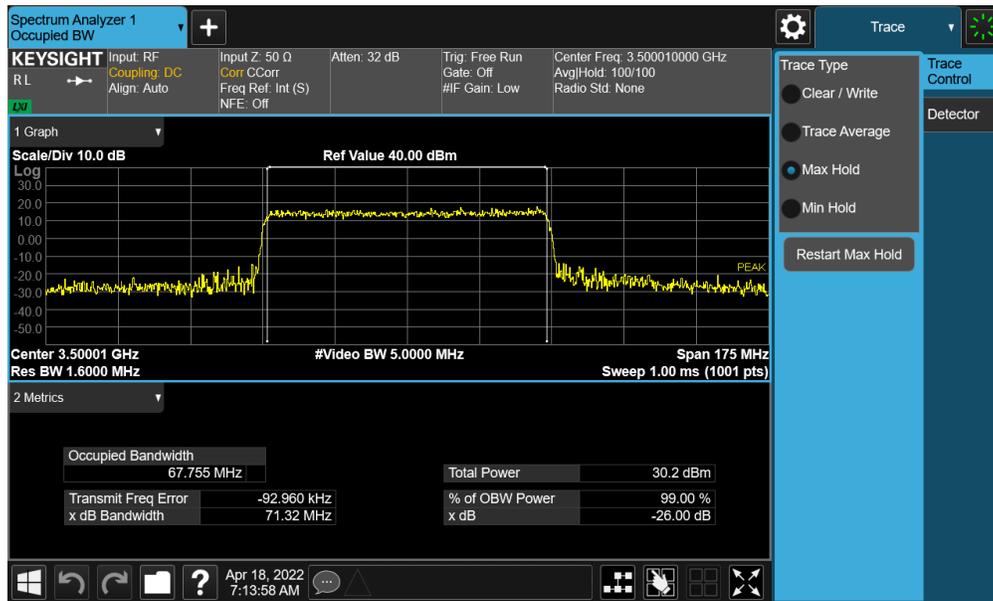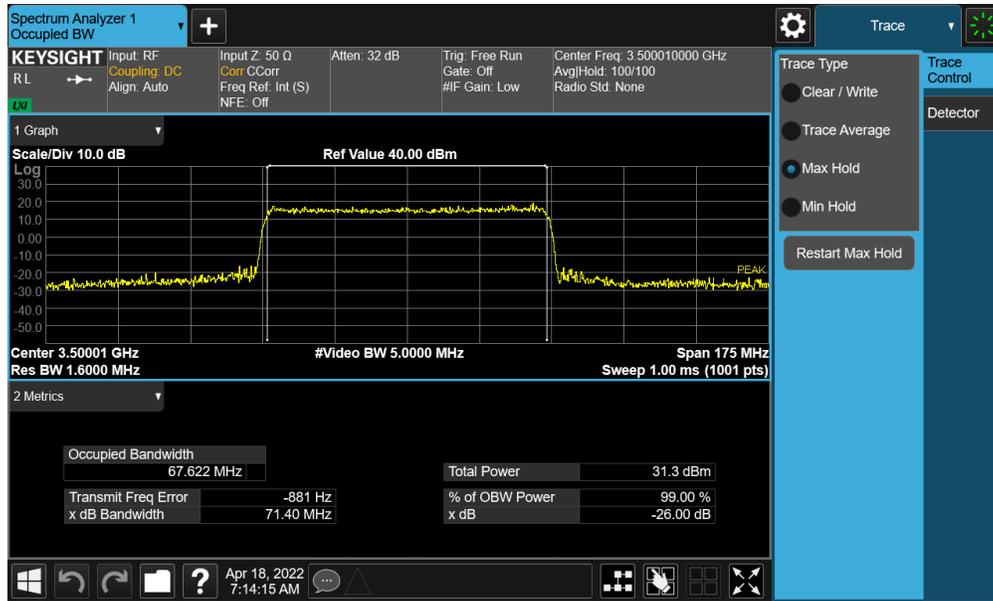

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 26 of 294

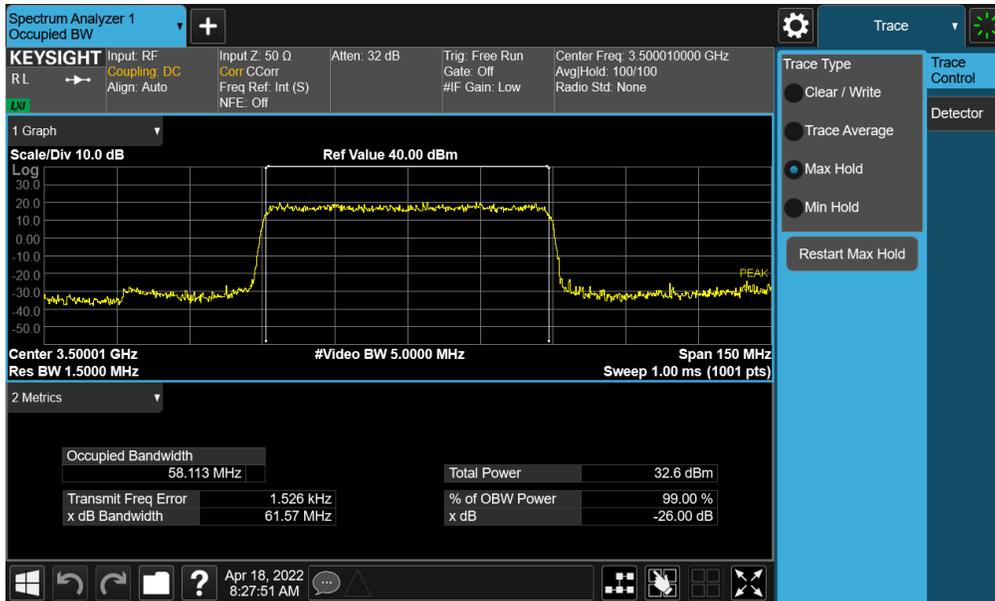


Plot 7-13. Occupied Bandwidth Plot (NR Band n77 (DoD) - 60MHz $\pi/2$ BPSK - Full RB - Antenna F)

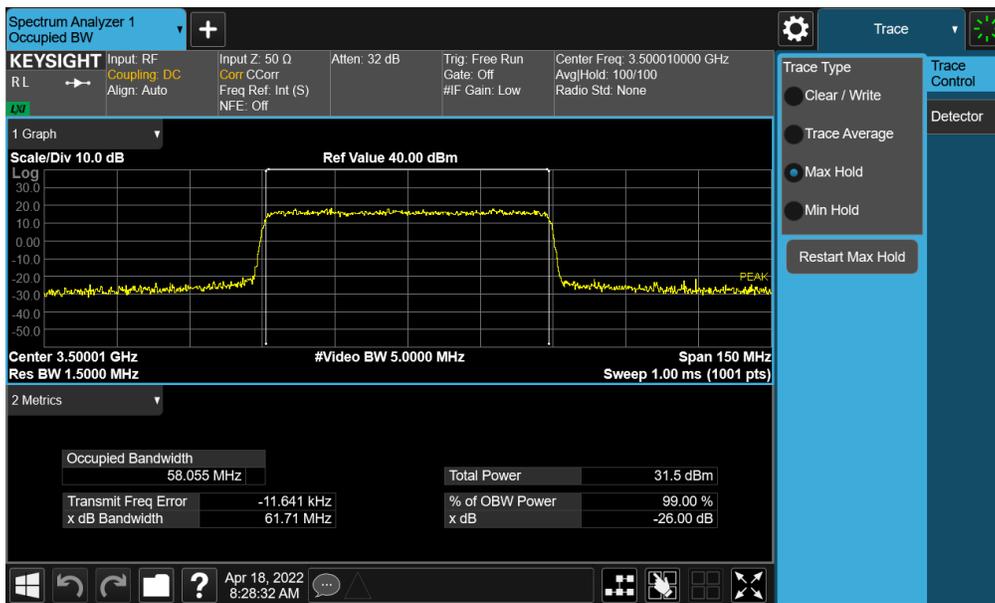


Plot 7-14. Occupied Bandwidth Plot (NR Band n77 (DoD) - 60MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 27 of 294

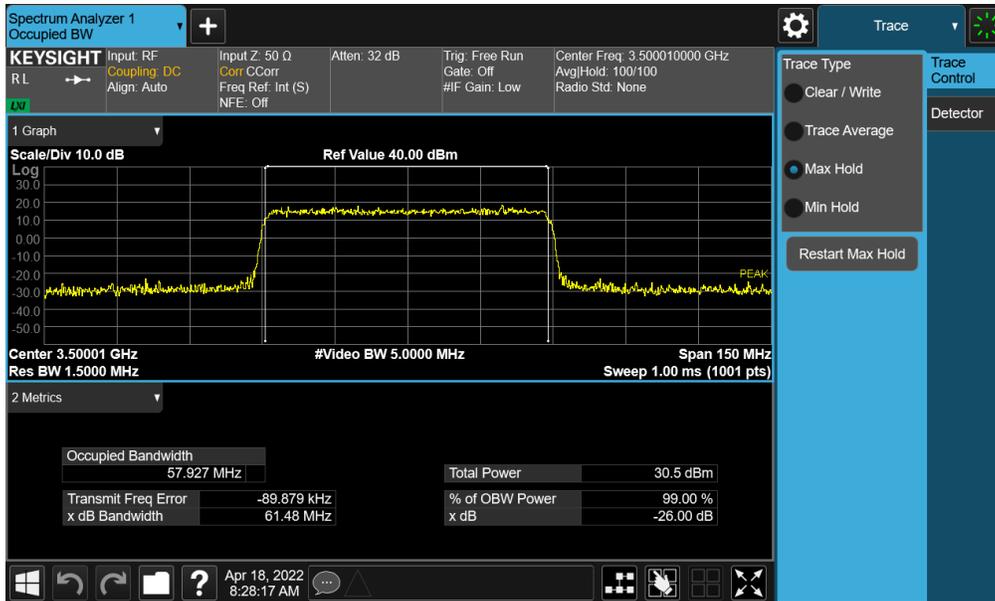


Plot 7-15. Occupied Bandwidth Plot (NR Band n77 (DoD) - 60MHz 16-QAM - Full RB - Antenna F)

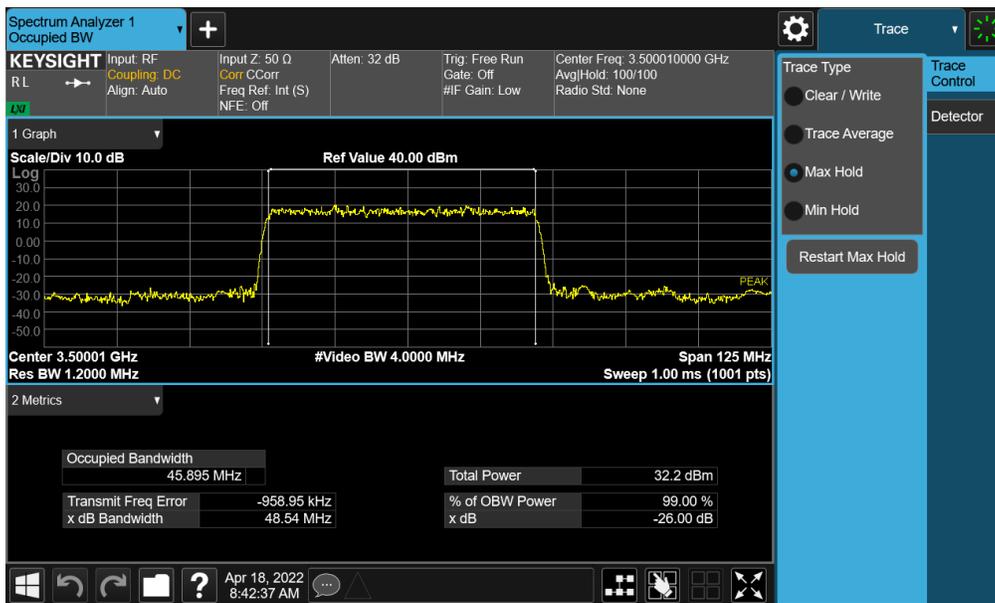


Plot 7-16. Occupied Bandwidth Plot (NR Band n77 (DoD) - 50MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 28 of 294

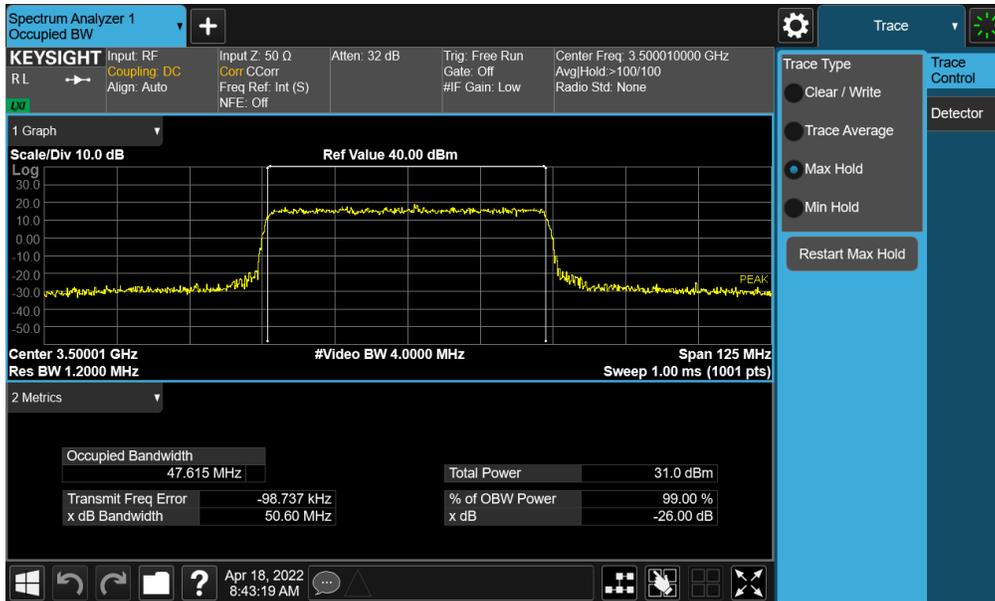


Plot 7-17. Occupied Bandwidth Plot (NR Band n77 (DoD) - 50MHz QPSK - Full RB - Antenna F)

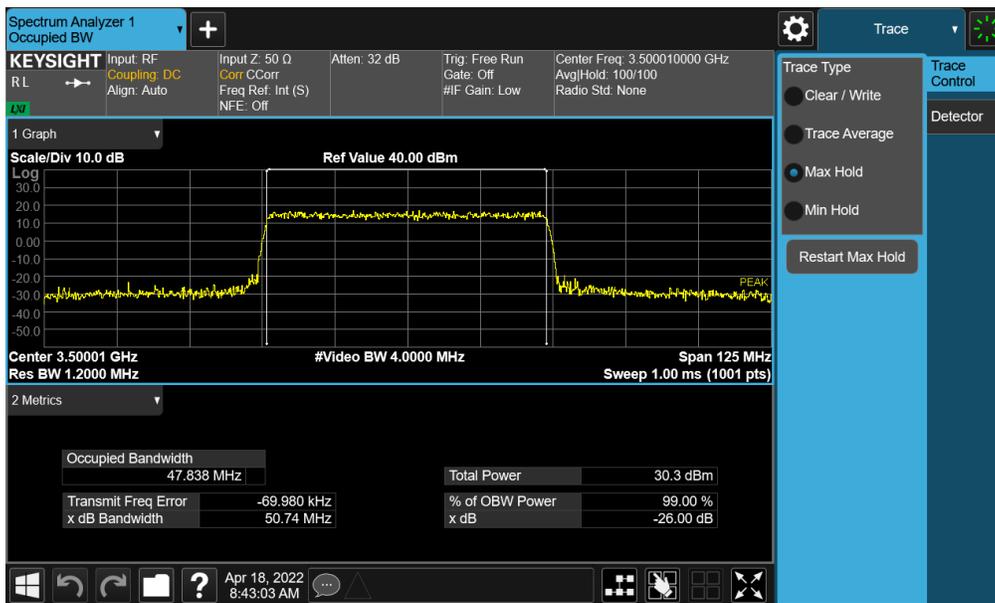


Plot 7-18. Occupied Bandwidth Plot (NR Band n77 (DoD) - 50MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 29 of 294

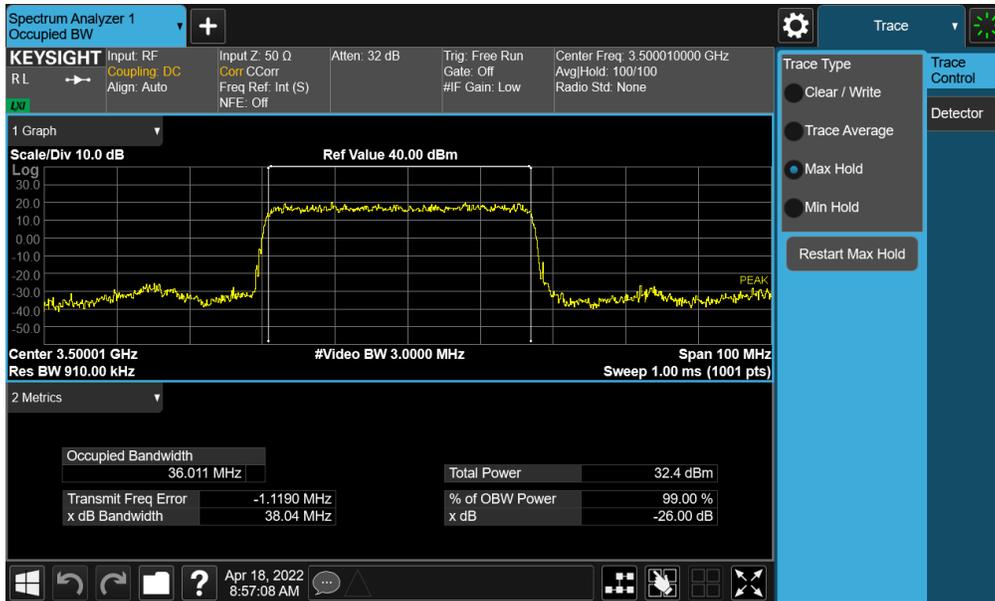


Plot 7-19. Occupied Bandwidth Plot (NR Band n77 (DoD) - 40MHz $\pi/2$ BPSK - Full RB - Antenna F)

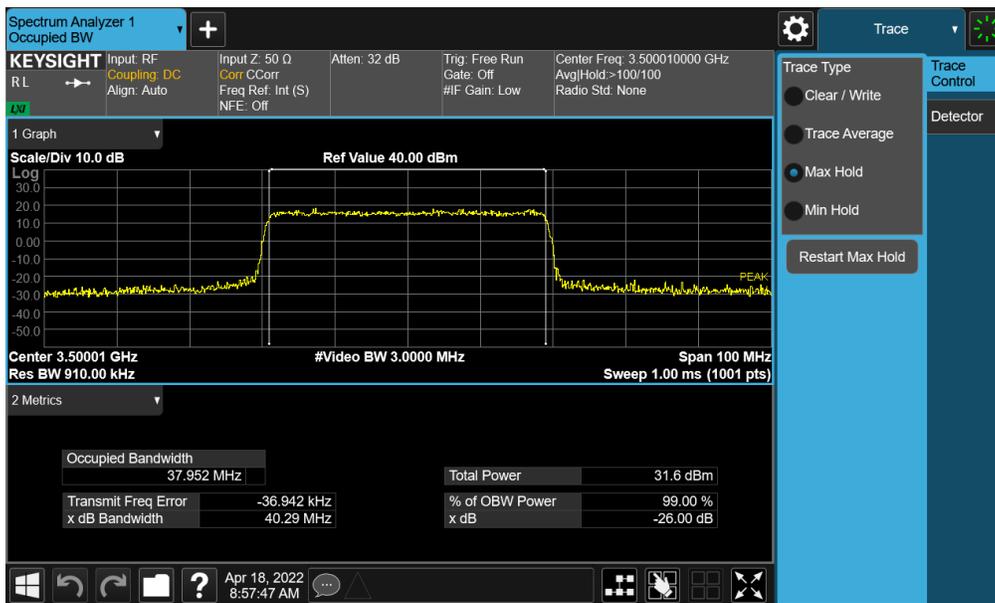


Plot 7-20. Occupied Bandwidth Plot (NR Band n77 (DoD) - 40MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 30 of 294

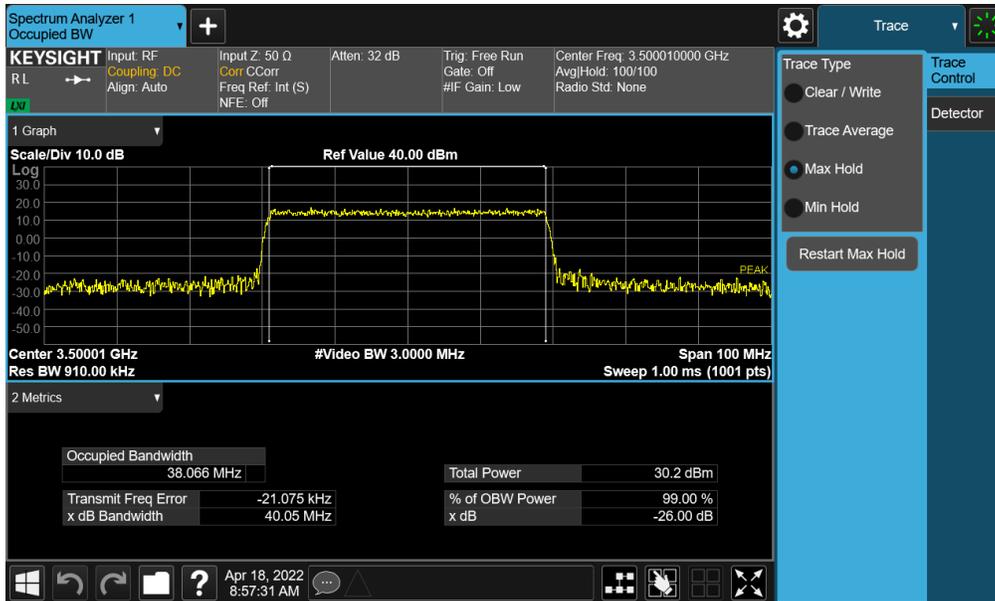


Plot 7-21. Occupied Bandwidth Plot (NR Band n77 (DoD) - 40MHz 16-QAM - Full RB - Antenna F)

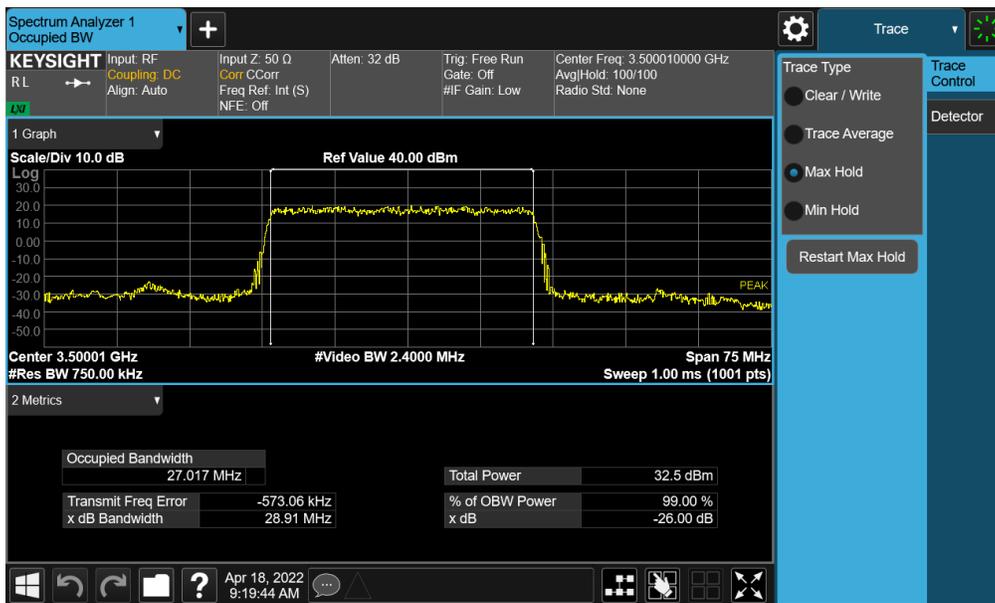


Plot 7-22. Occupied Bandwidth Plot (NR Band n77 (DoD) - 30MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 31 of 294

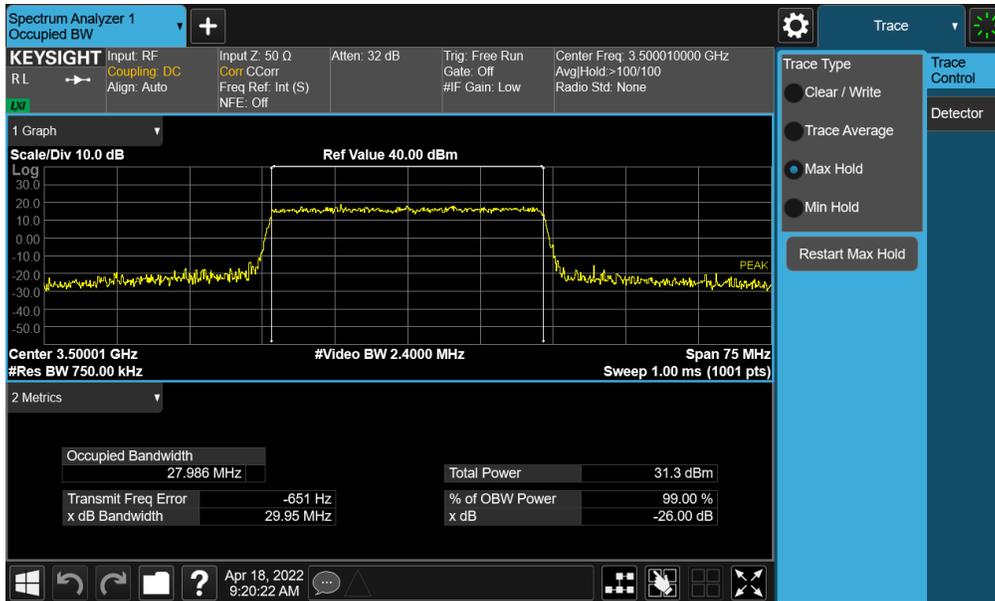


Plot 7-23. Occupied Bandwidth Plot (NR Band n77 (DoD) - 30MHz QPSK - Full RB - Antenna F)

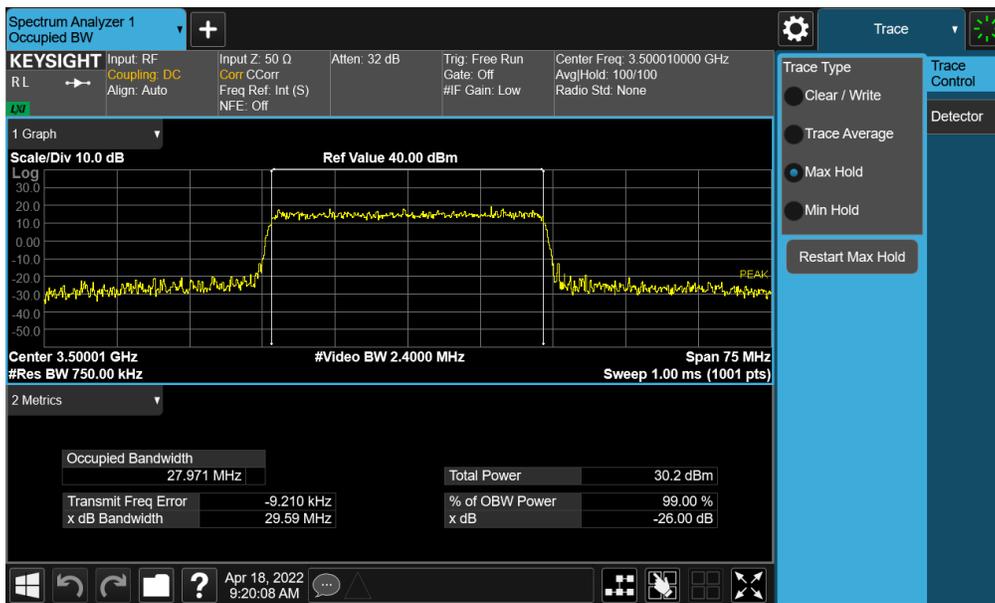


Plot 7-24. Occupied Bandwidth Plot (NR Band n77 (DoD) - 30MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 32 of 294

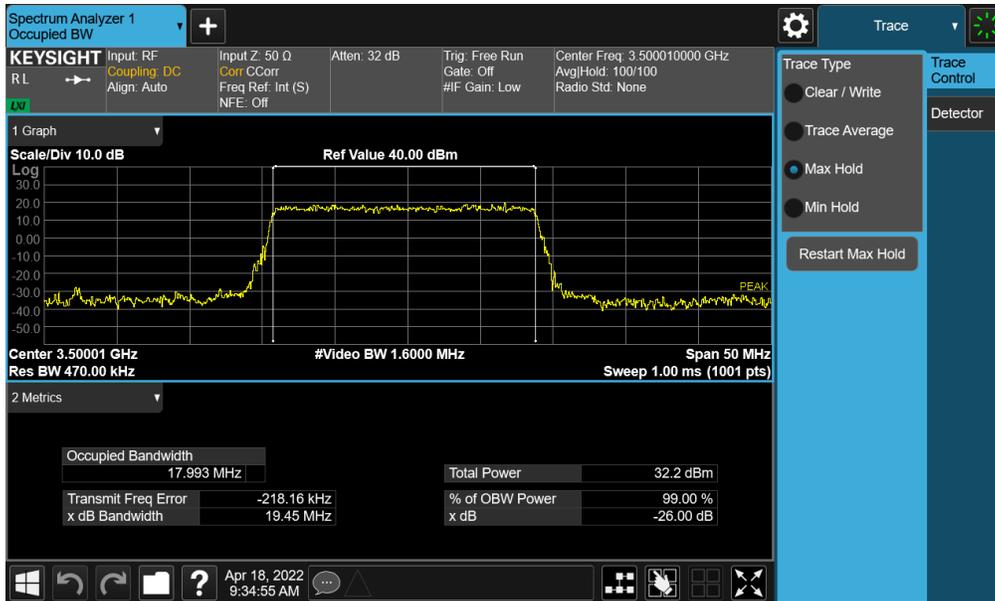


Plot 7-25. Occupied Bandwidth Plot (NR Band n77 (DoD) - 20MHz $\pi/2$ BPSK - Full RB - Antenna F)

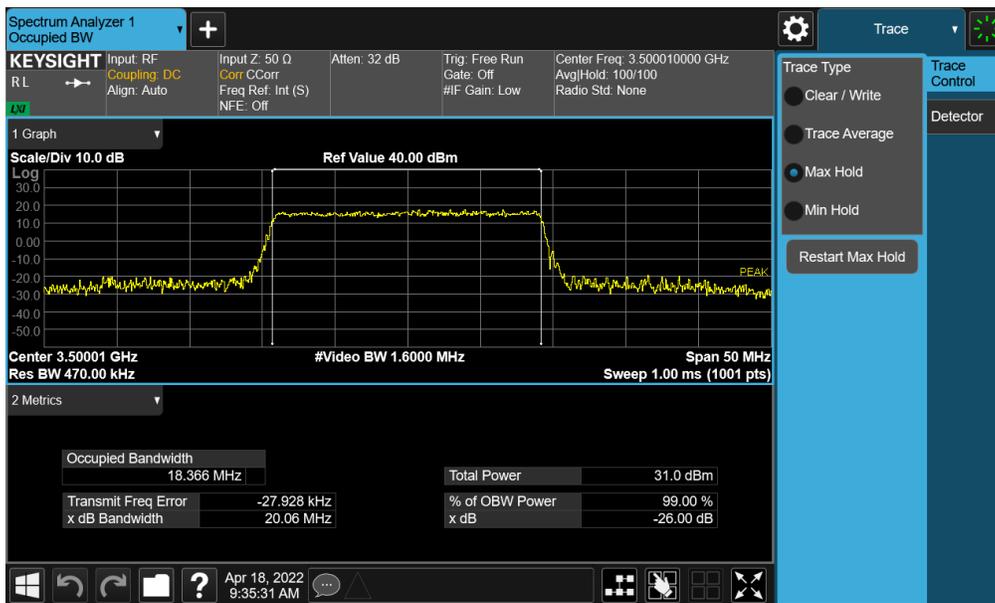


Plot 7-26. Occupied Bandwidth Plot (NR Band n77 (DoD) - 20MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 33 of 294

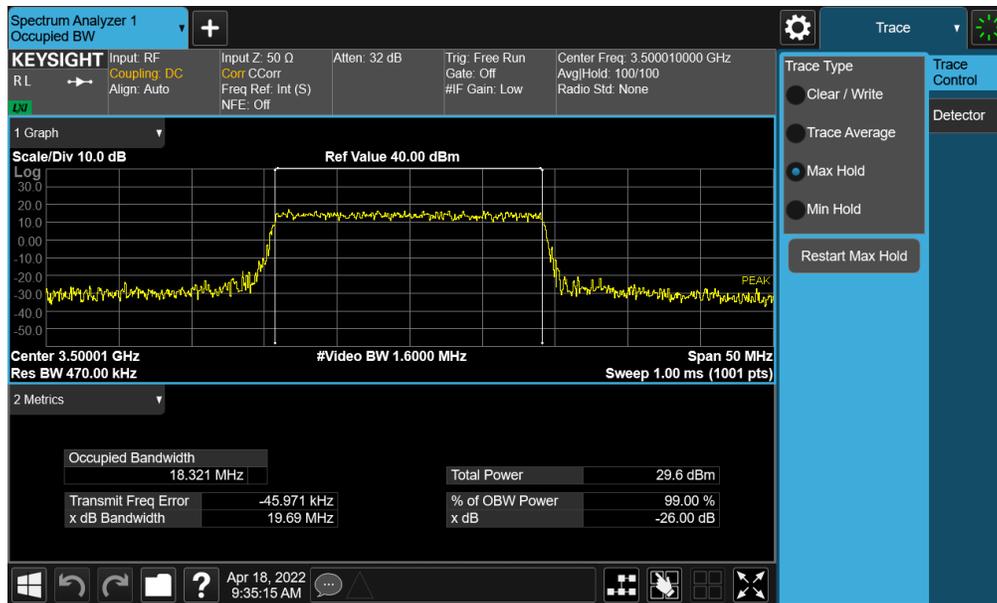


Plot 7-27. Occupied Bandwidth Plot (NR Band n77 (DoD) - 20MHz 16-QAM - Full RB - Antenna F)

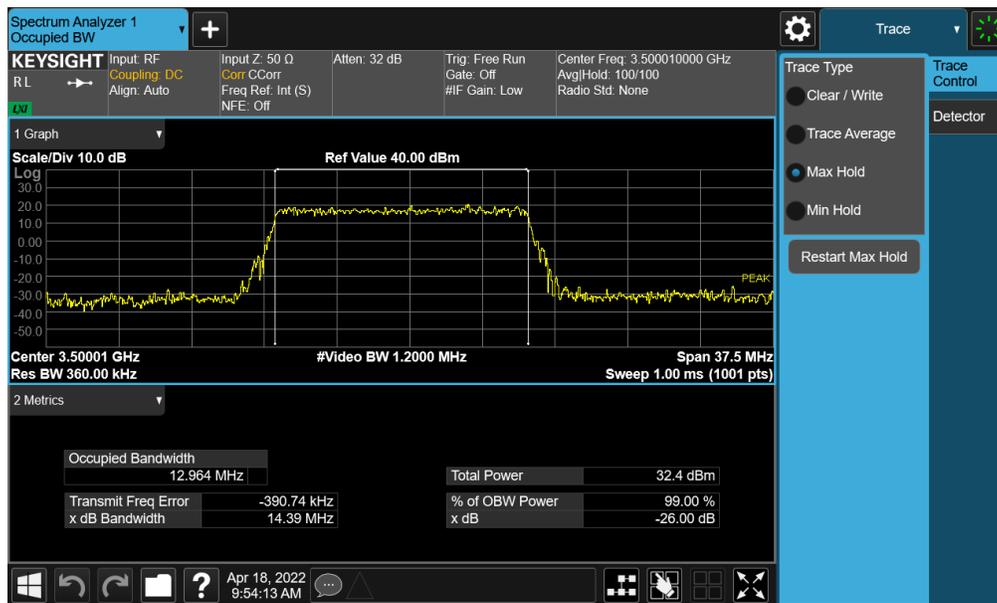


Plot 7-28. Occupied Bandwidth Plot (NR Band n77 (DoD) - 15MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 34 of 294


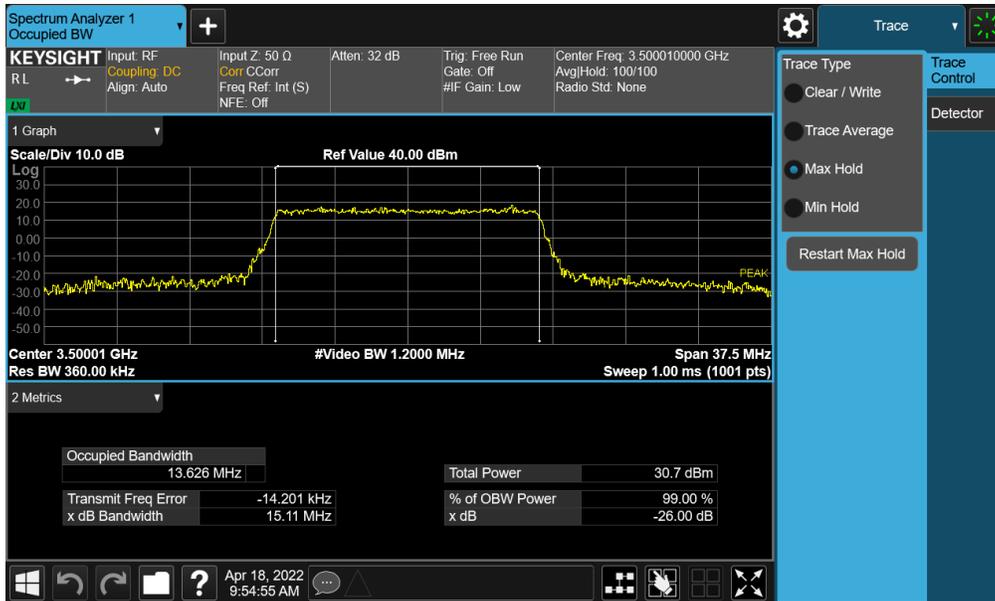


Plot 7-29. Occupied Bandwidth Plot (NR Band n77 (DoD) - 15MHz QPSK - Full RB - Antenna F)

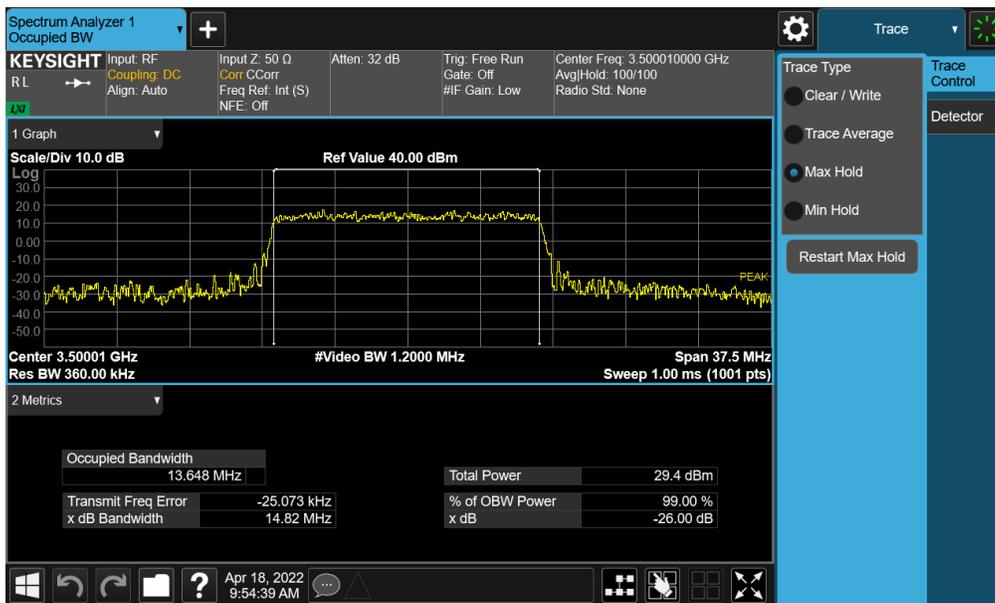


Plot 7-30. Occupied Bandwidth Plot (NR Band n77 (DoD) - 15MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 35 of 294

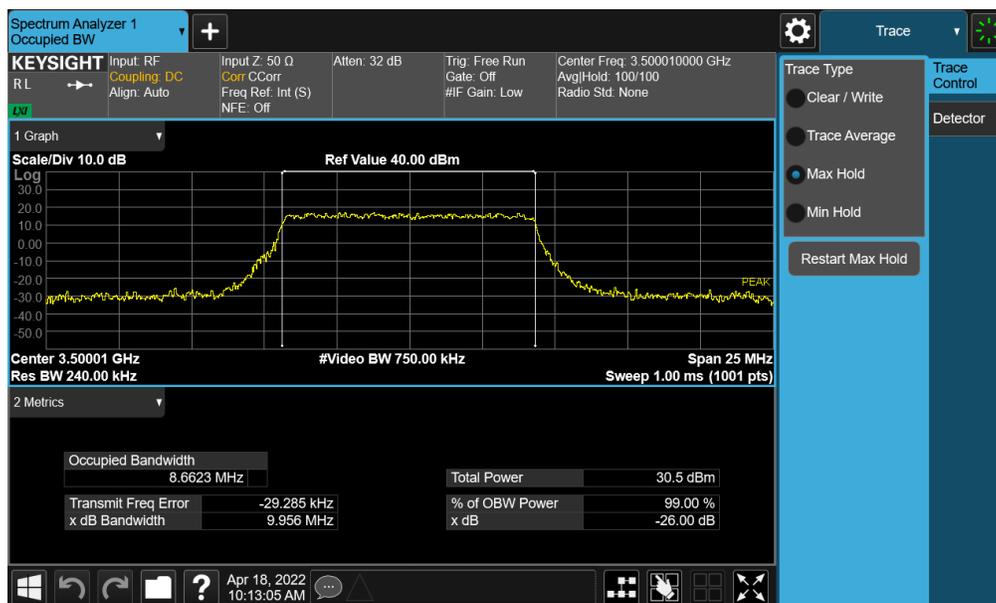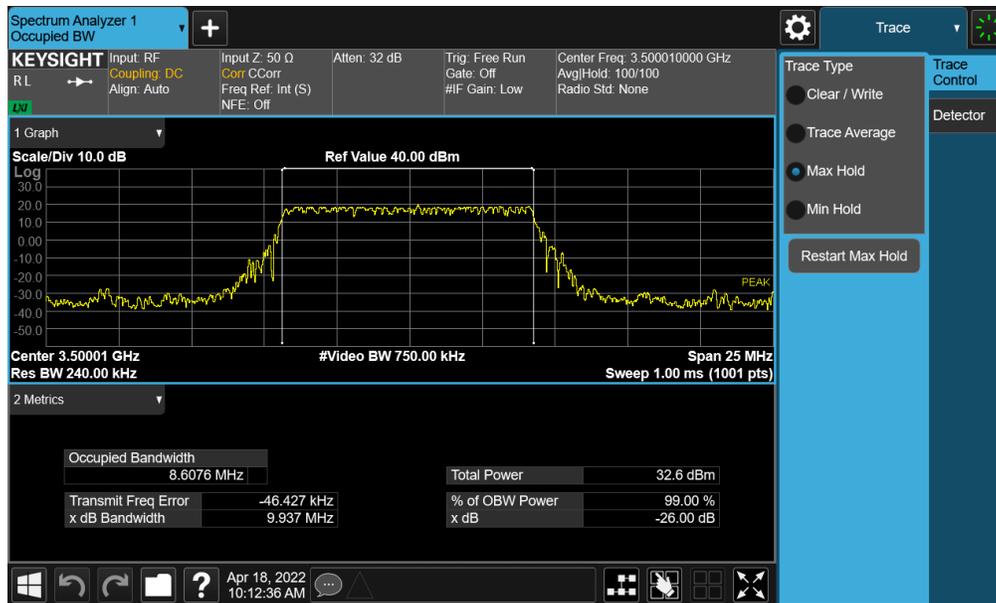


FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 36 of 294

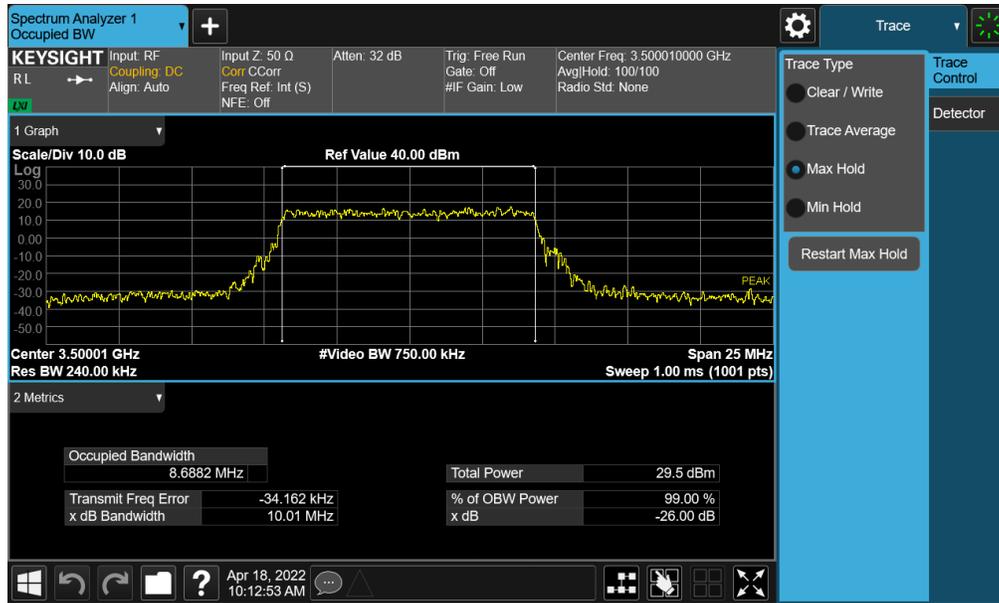


FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 37 of 294

NR Band n77 (PC2) – C-Band – SRS-1 – Antenna F

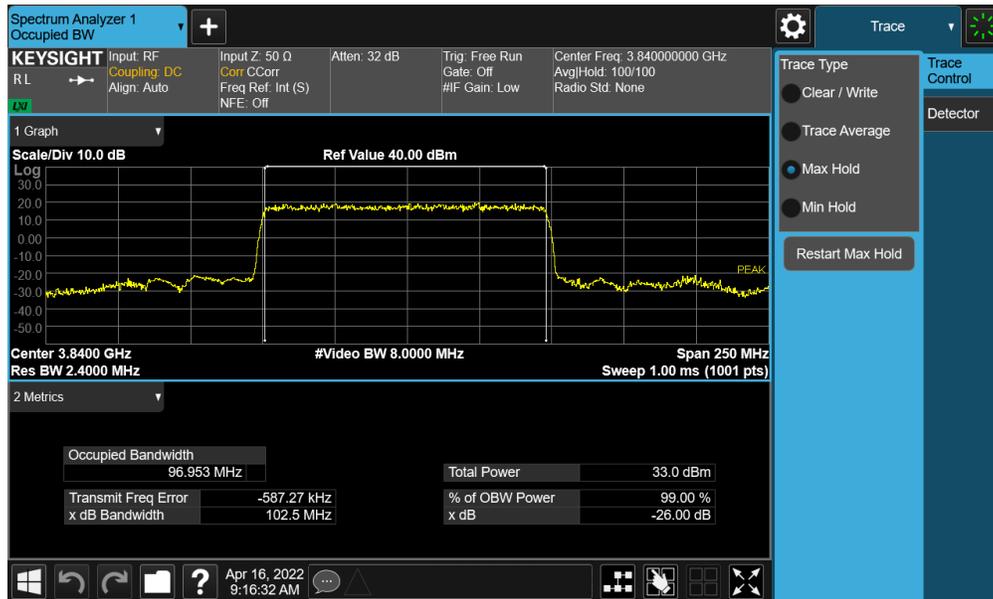


Plot 7-34. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 100MHz $\pi/2$ BPSK - Full RB - Antenna F)

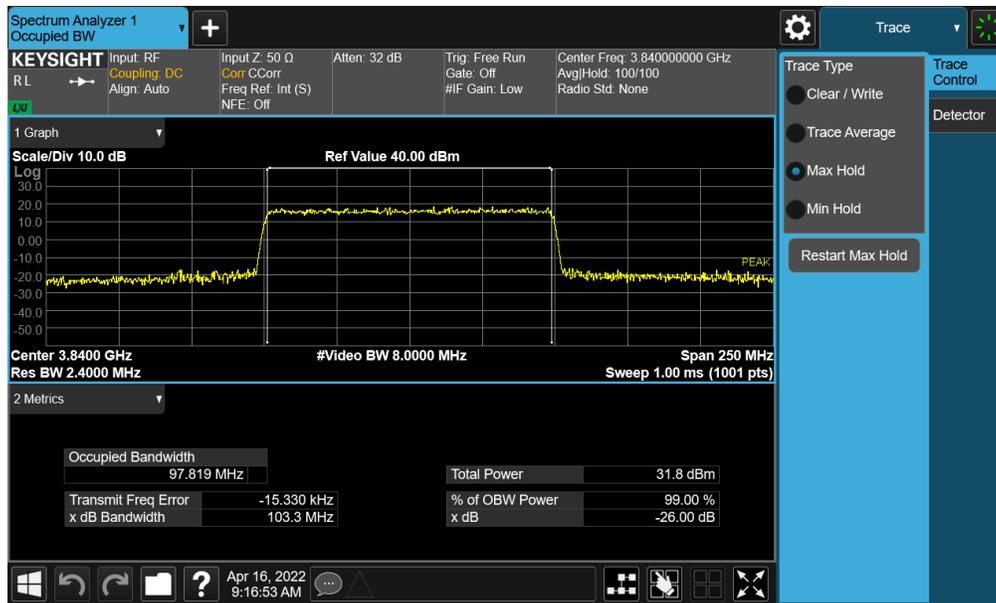


Plot 7-35. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 100MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 38 of 294


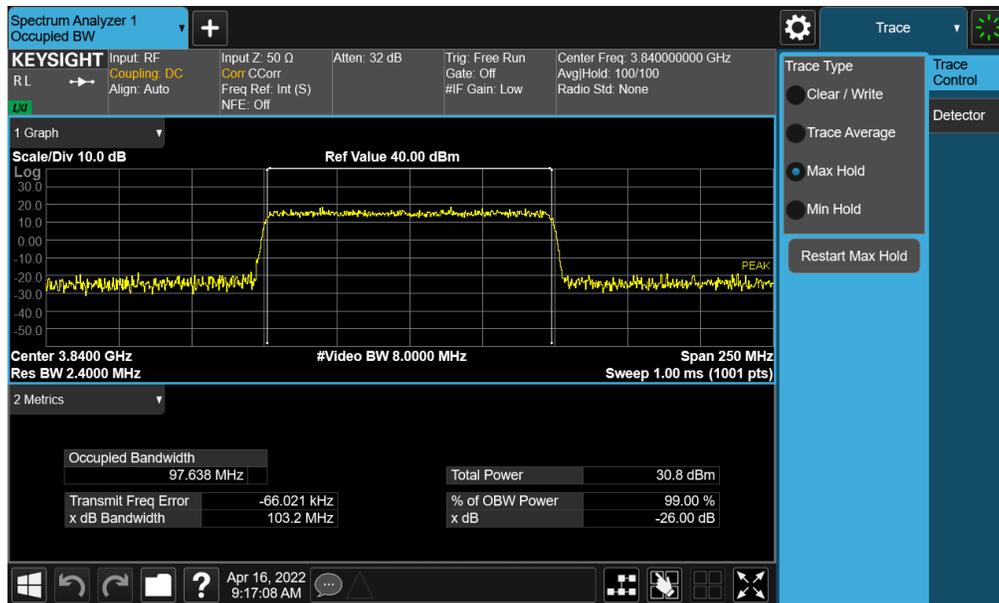


Plot 7-36. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 100MHz 16-QAM - Full RB - Antenna F)

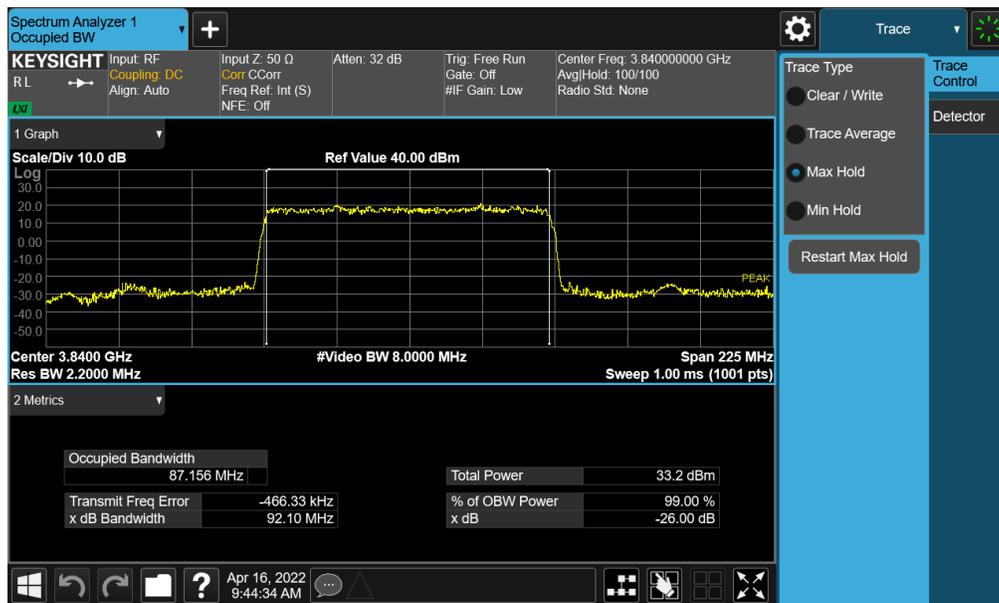


Plot 7-37. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 90MHz pi/2 BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 39 of 294

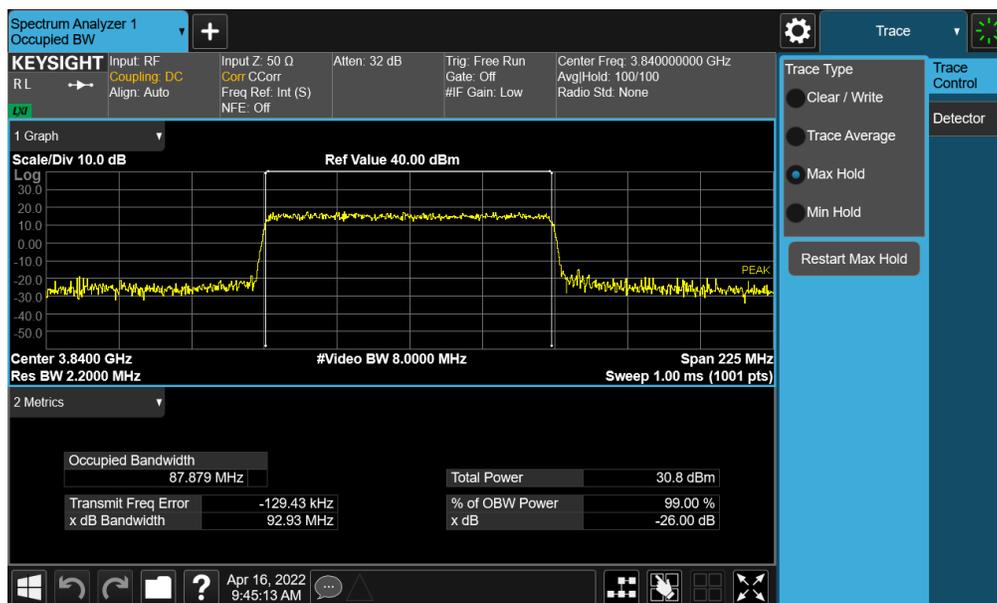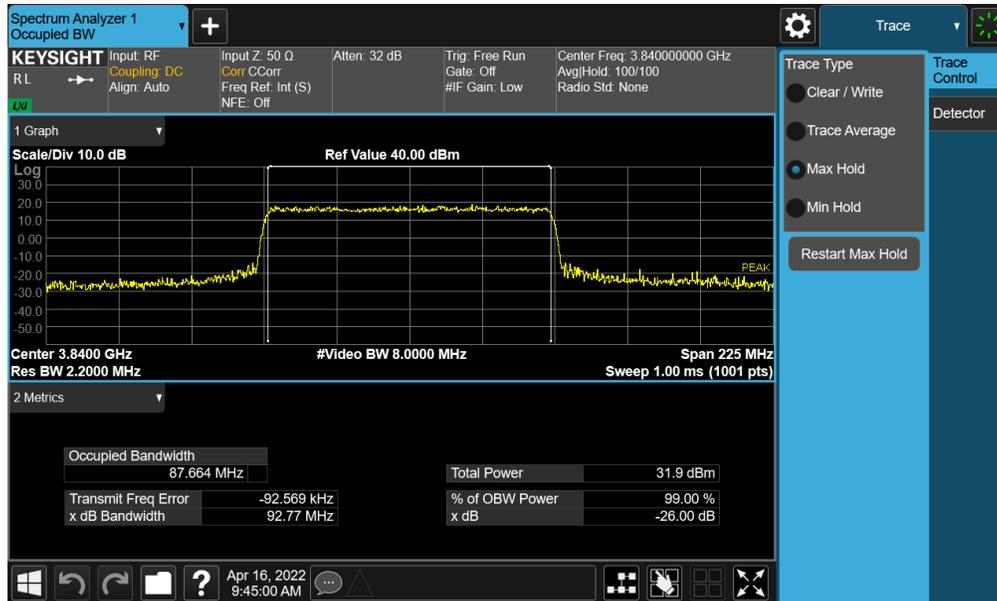

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 40 of 294

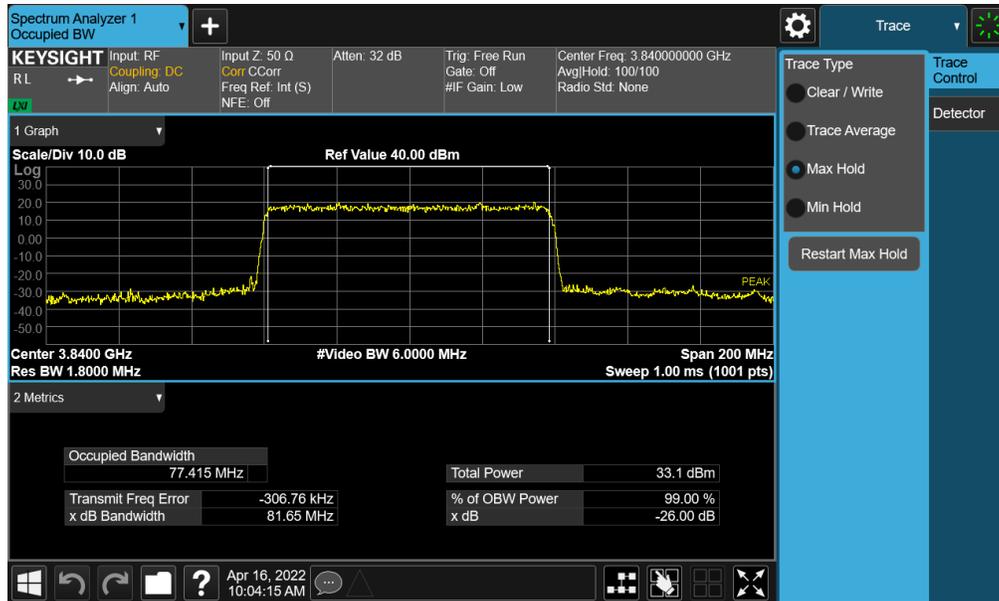


Plot 7-40. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 80MHz $\pi/2$ BPSK - Full RB - Antenna F)




Plot 7-41. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 80MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 41 of 294

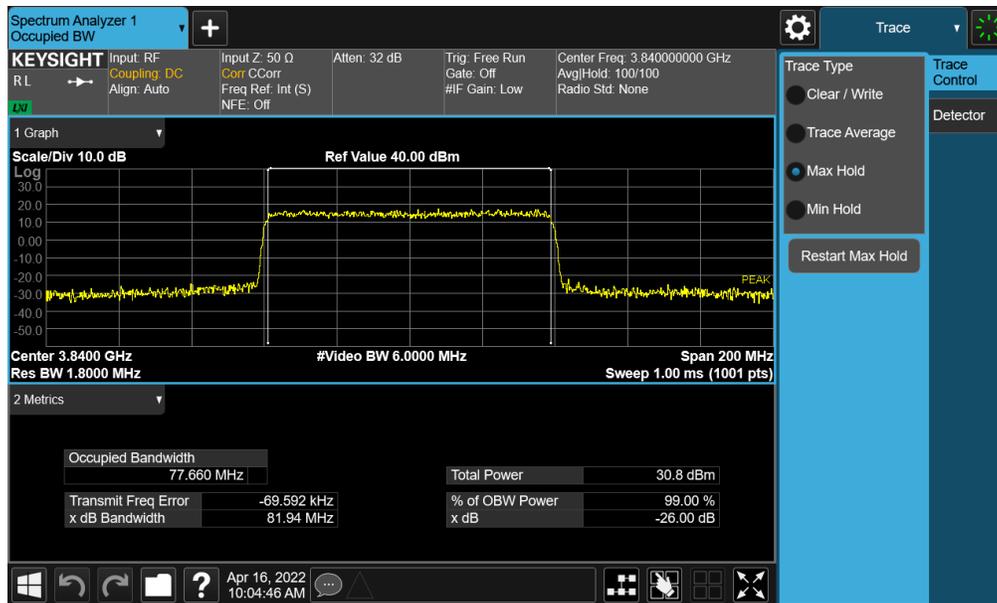


Plot 7-42. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 80MHz 16-QAM - Full RB - Antenna F)

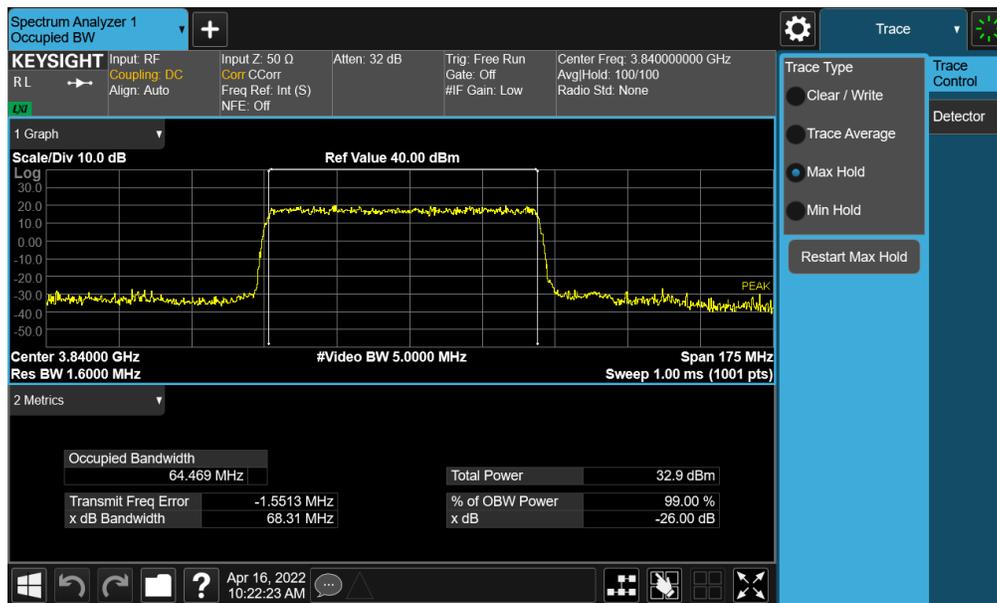


Plot 7-43. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 70MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 42 of 294

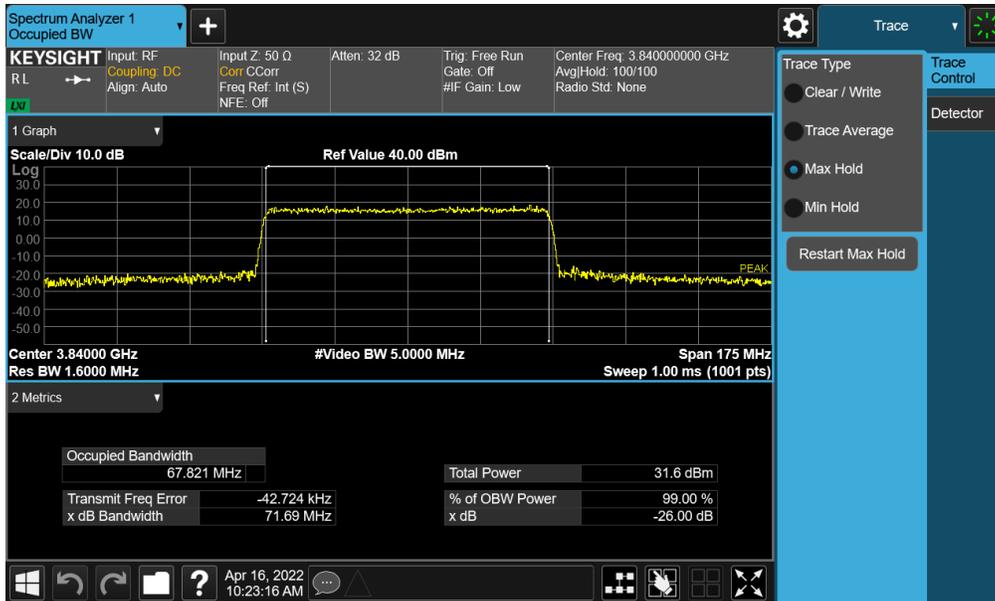


Plot 7-44. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 70MHz QPSK - Full RB - Antenna F)

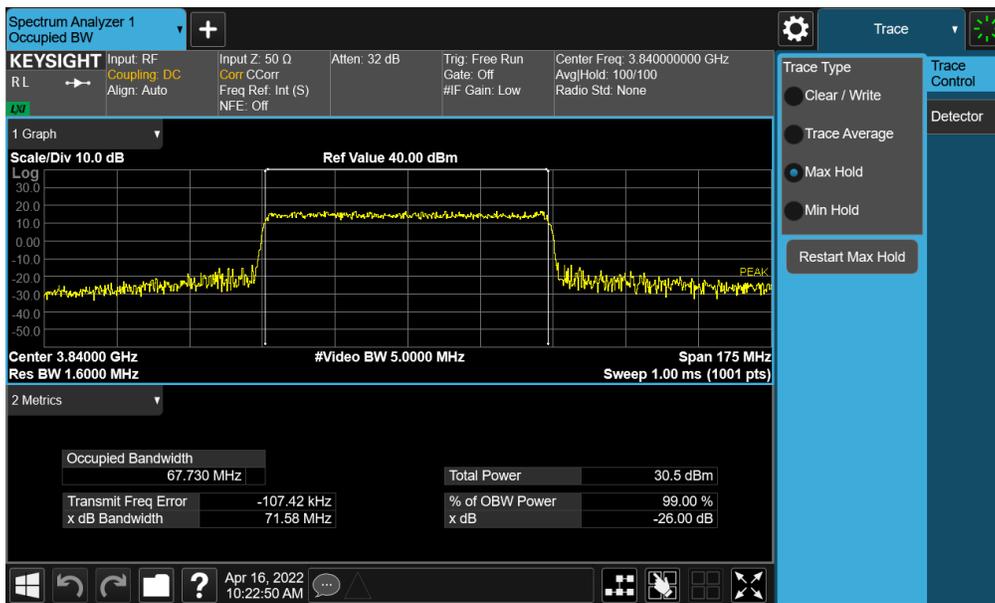


Plot 7-45. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 70MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 43 of 294

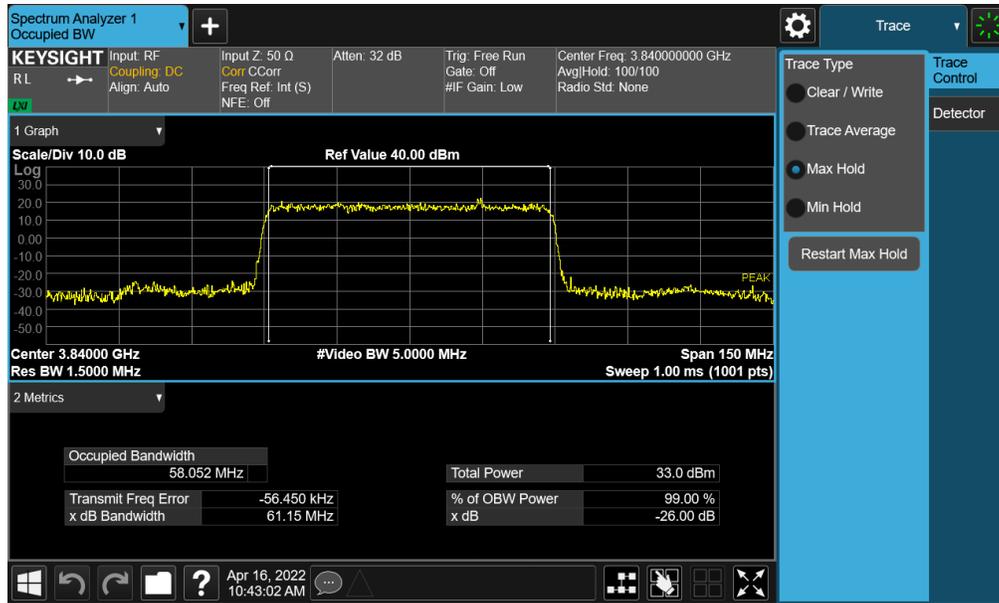


Plot 7-46. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 60MHz $\pi/2$ BPSK - Full RB - Antenna F)

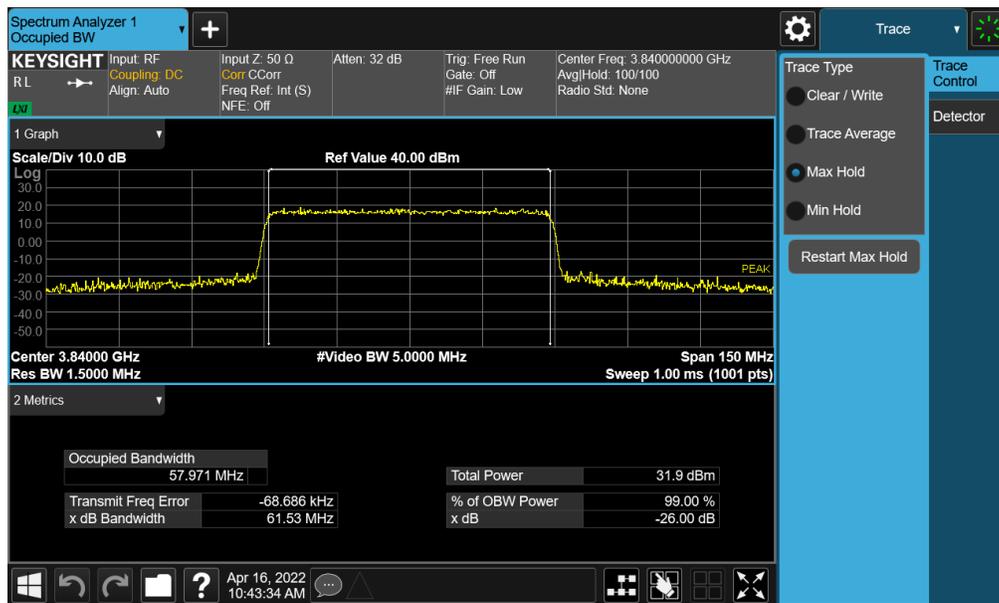

Plot 7-47. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 60MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 44 of 294

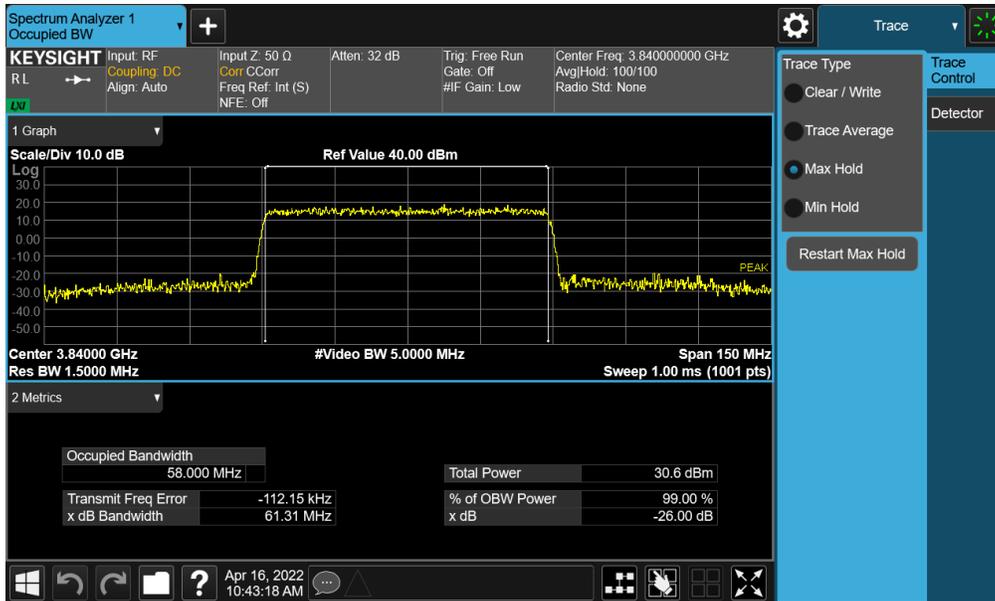


Plot 7-48. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 60MHz 16-QAM - Full RB - Antenna F)




Plot 7-49. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 50MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 45 of 294

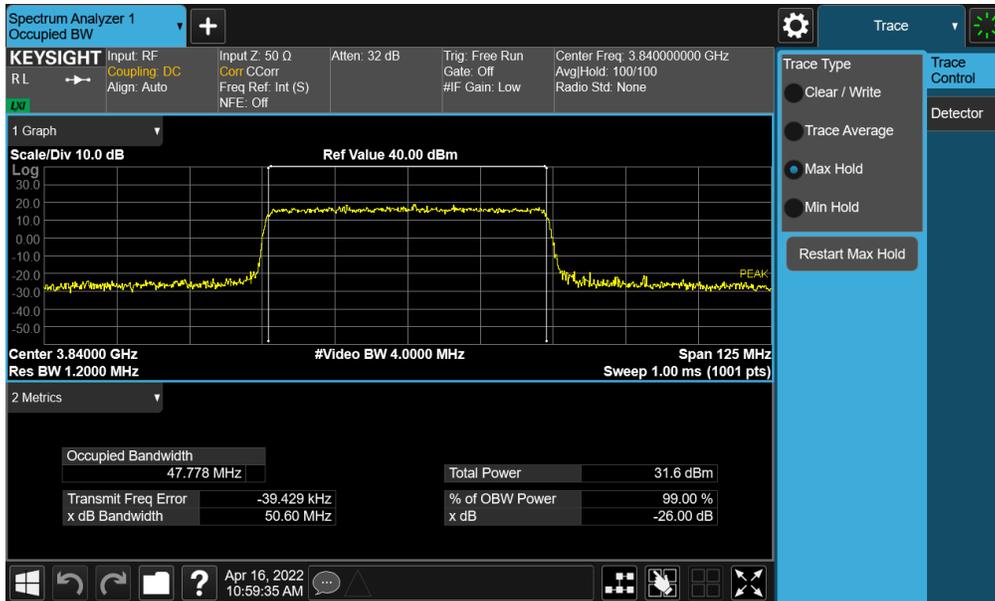

Plot 7-50. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 50MHz QPSK - Full RB - Antenna F)

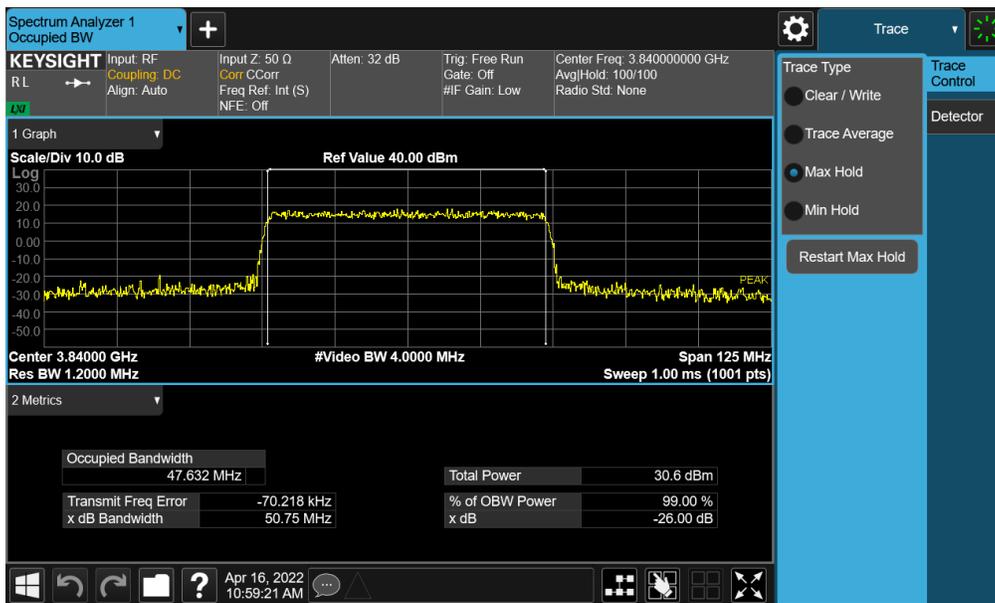


Plot 7-51. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 50MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 46 of 294




Plot 7-52. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 40MHz $\pi/2$ BPSK - Full RB - Antenna F)

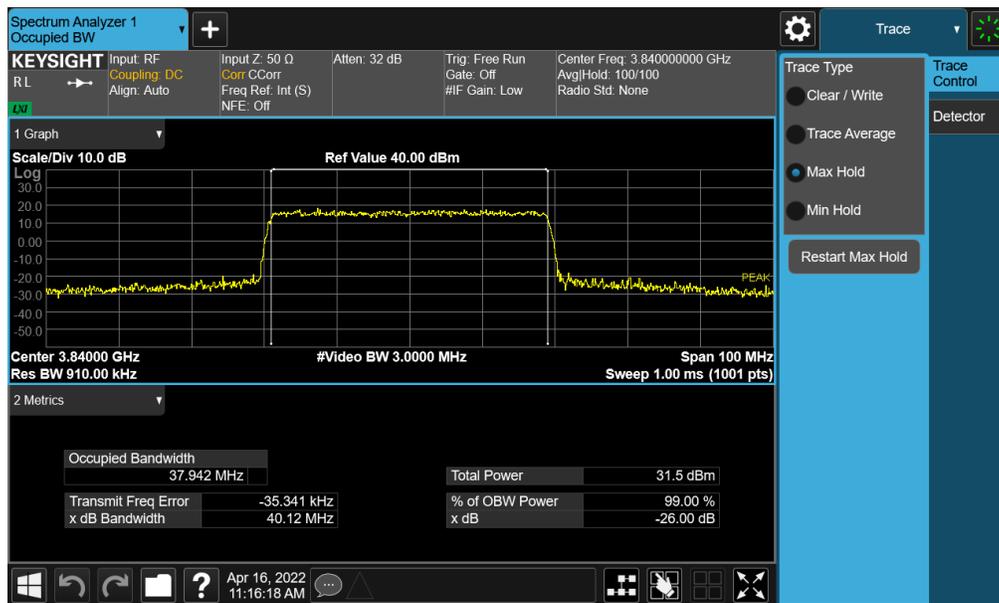


Plot 7-53. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 40MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 47 of 294

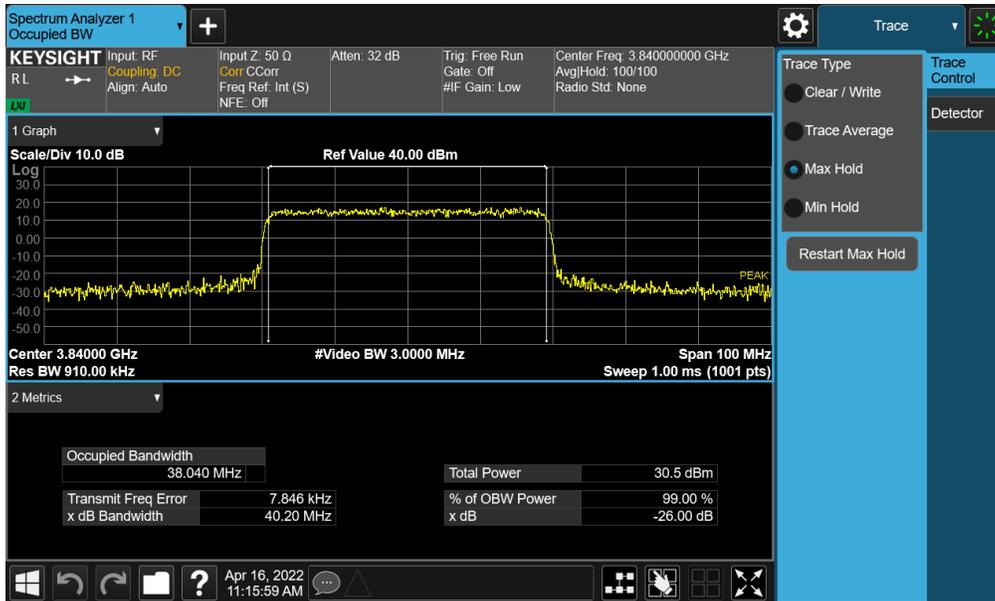


Plot 7-54. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 40MHz 16-QAM - Full RB - Antenna F)

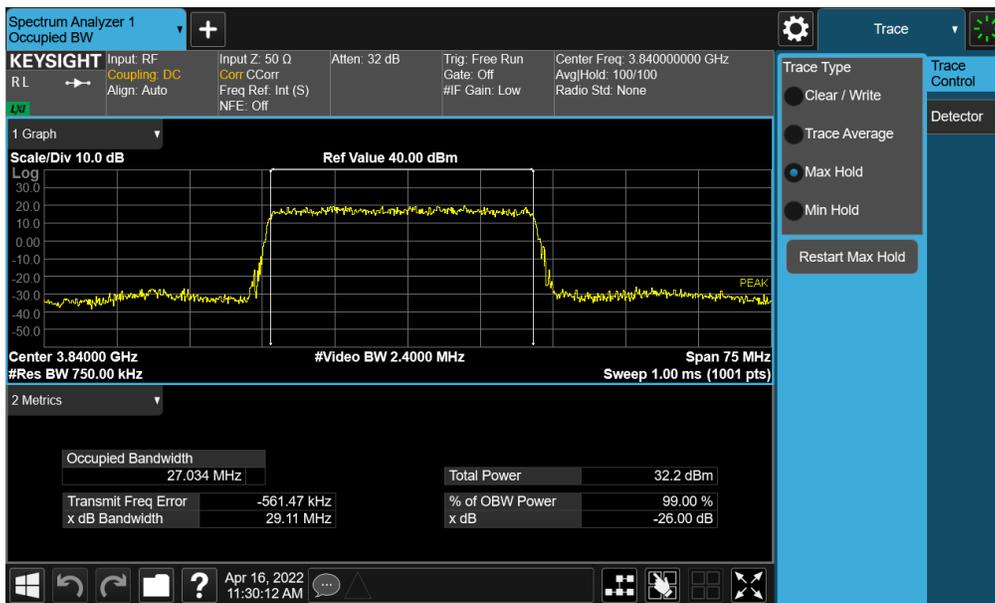


Plot 7-55. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 30MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 48 of 294

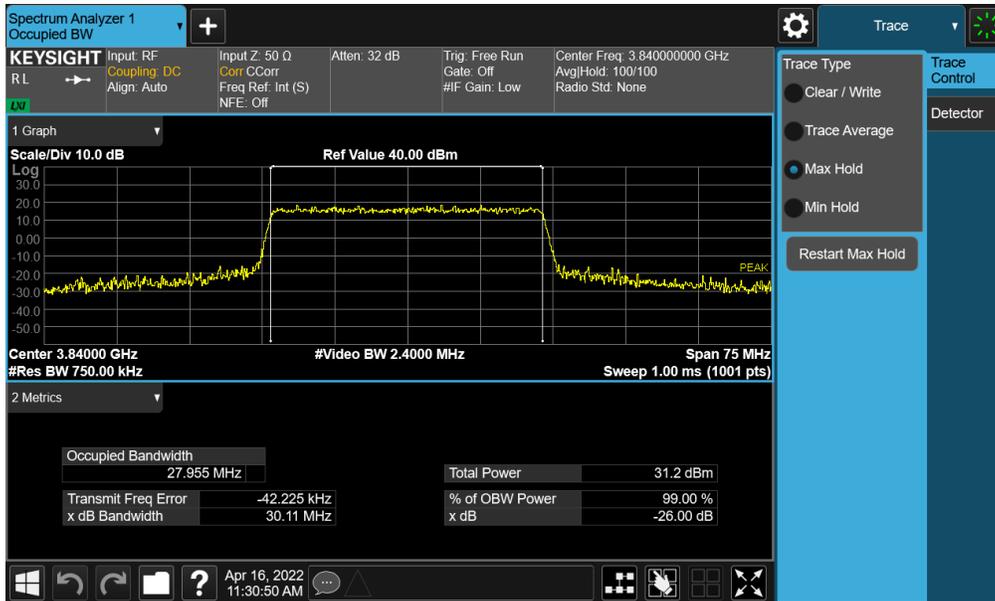


Plot 7-56. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 30MHz QPSK - Full RB - Antenna F)

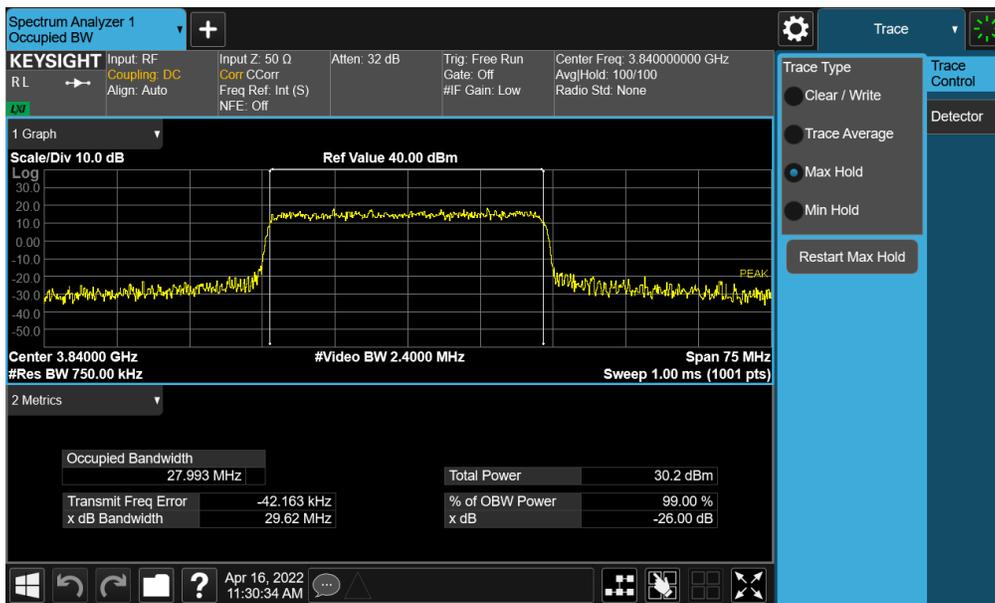


Plot 7-57. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 30MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 49 of 294

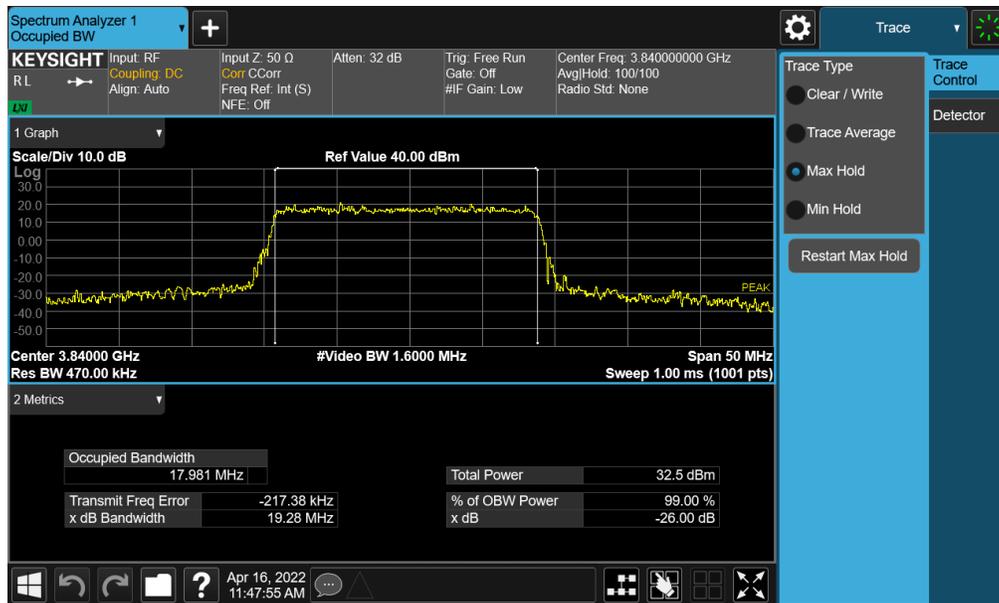


Plot 7-58. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 20MHz $\pi/2$ BPSK - Full RB - Antenna F)

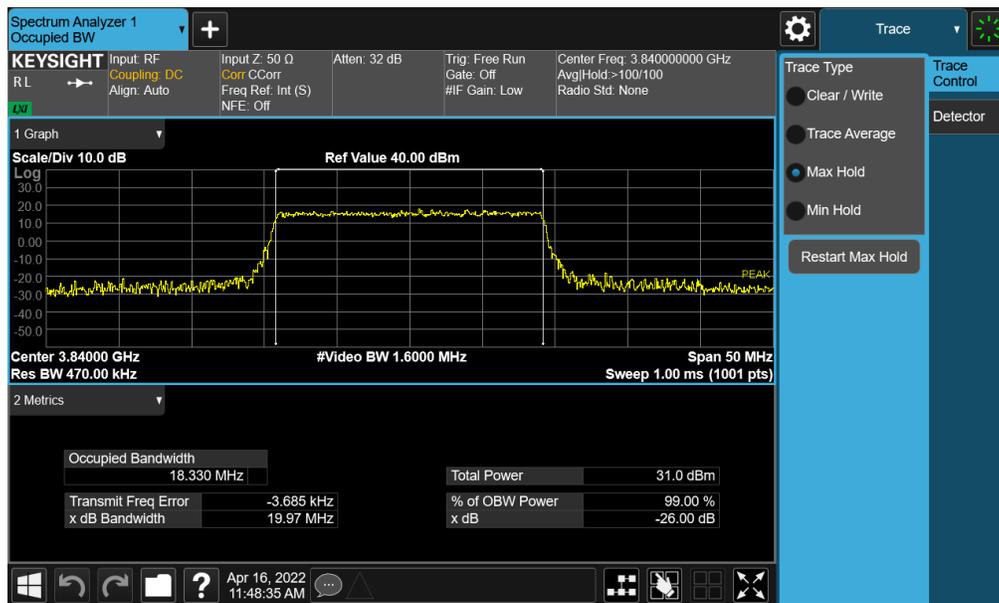


Plot 7-59. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 20MHz QPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 50 of 294

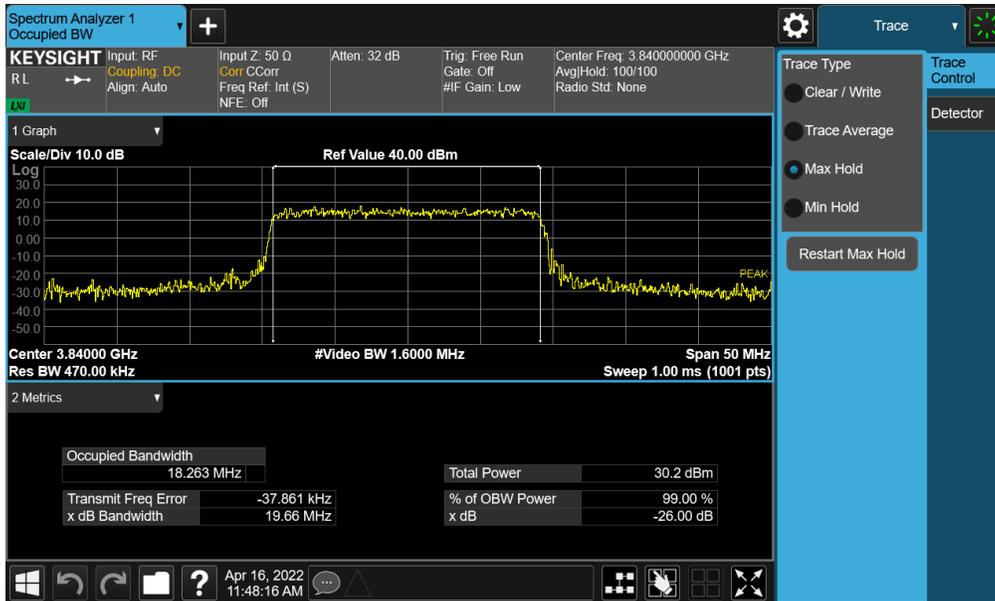


Plot 7-60. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 20MHz 16-QAM - Full RB - Antenna F)

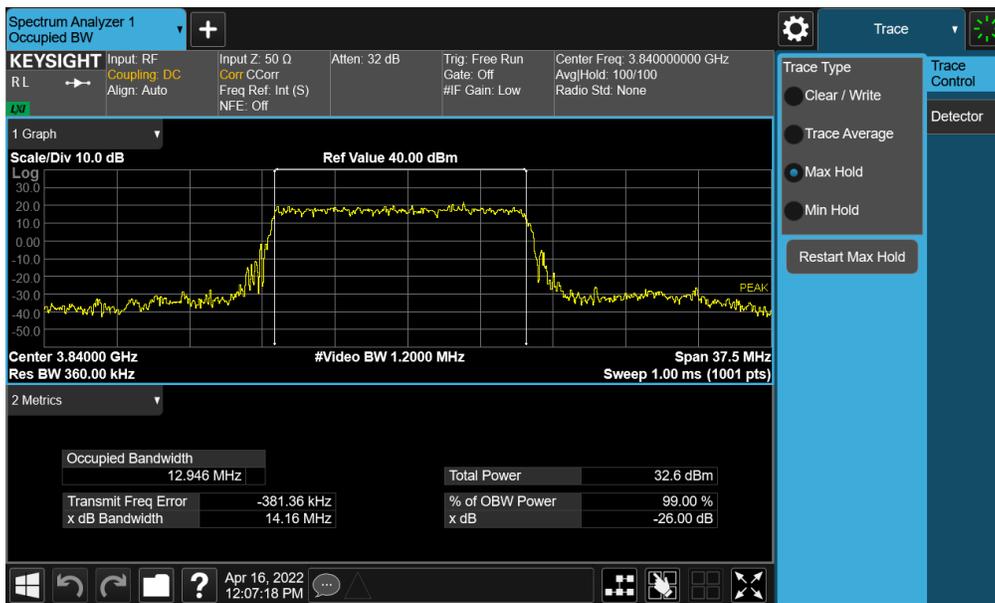


Plot 7-61. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 15MHz $\pi/2$ BPSK - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 51 of 294

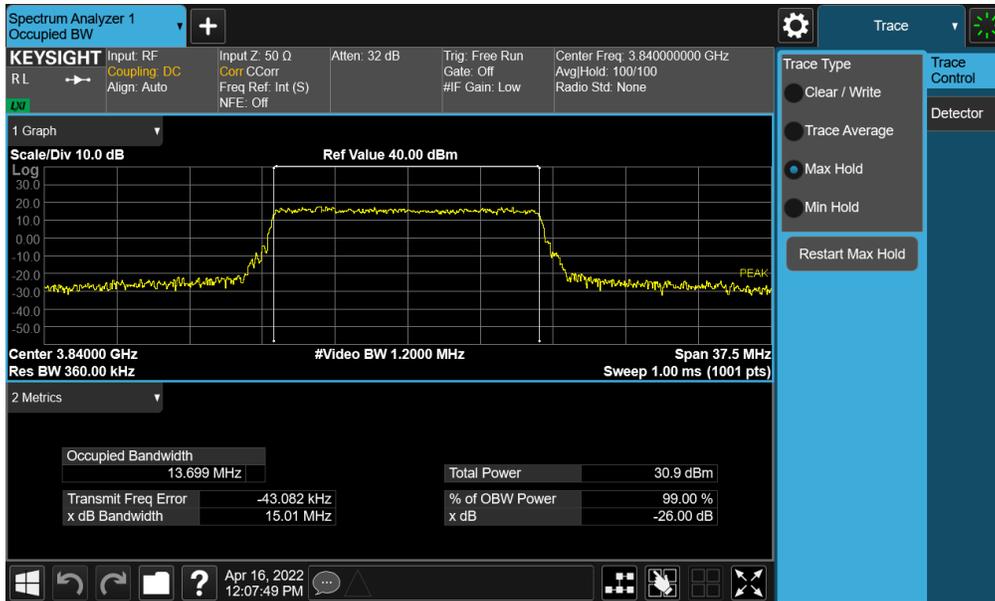

Plot 7-62. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 15MHz QPSK - Full RB - Antenna F)

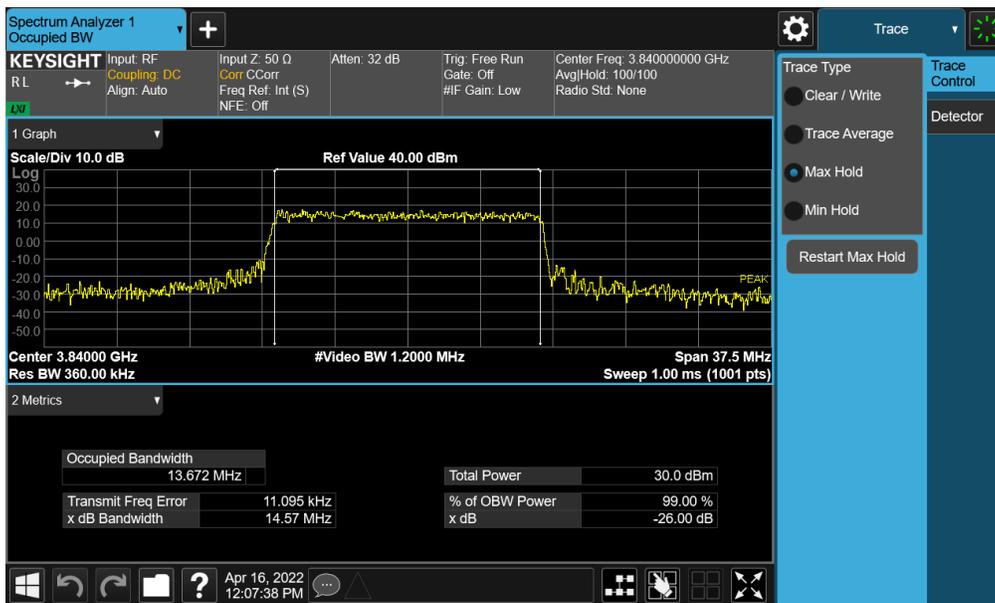

Plot 7-63. Occupied Bandwidth Plot (NR Band n77 (C-Band) - 15MHz 16-QAM - Full RB - Antenna F)

FCC ID: A3LSMF936U	PART 27 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2204010046-06.A3L	Test Dates: 04/01 - 06/23/2022	EUT Type: Portable Handset	Page 52 of 294