



Plot 7-61. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.5 - ANT 1 – GPS band

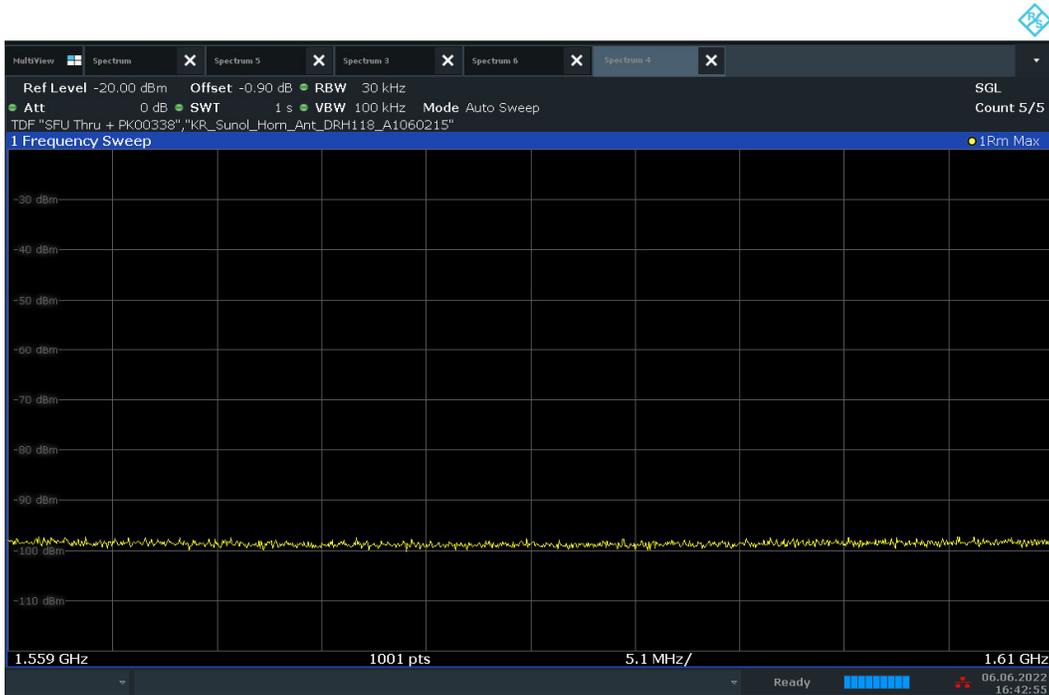

Plot 7-62. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.5 - ANT 1 – GPS band

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 51 of 71

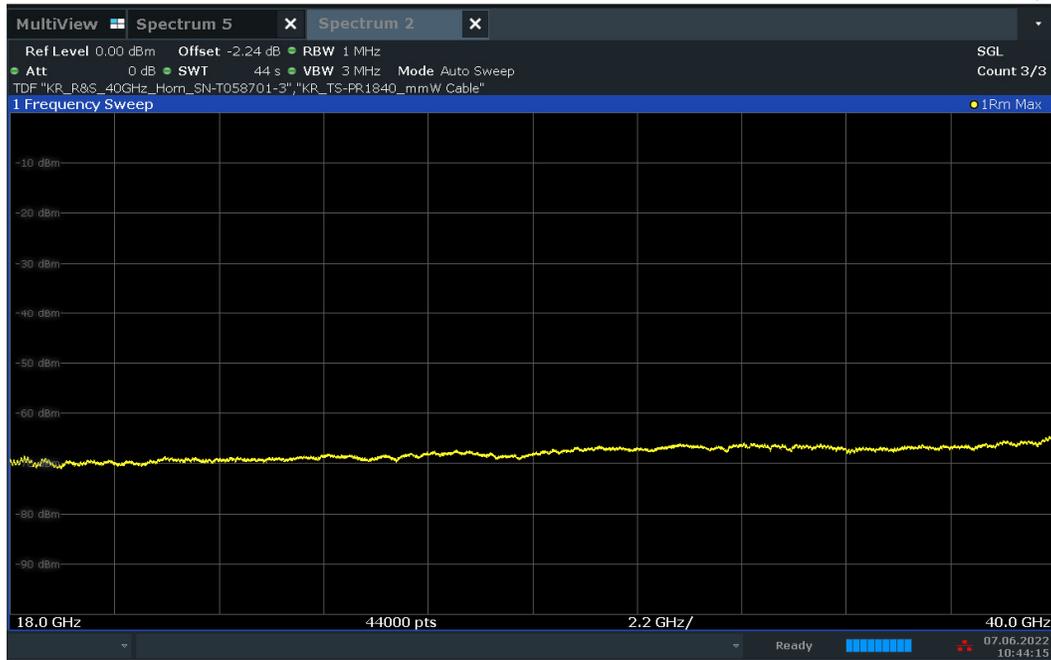

Plot 7-63. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.5 - ANT 1

Channel:	5
Frequency (MHz):	6489.6
Preamble ID:	27
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1524	RMS	V	-	-	-72.77	-9.51	-12.64	-83.17	-75.30	-7.87
1893	RMS	V	-	-	-72.73	-8.14	-12.64	-81.76	-63.30	-18.46
3097	RMS	V	-	-	-73.10	-5.04	-12.64	-79.03	-61.30	-17.73
10528	RMS	V	-	-	-75.67	7.31	-12.64	-69.25	-41.30	-27.95
12979	RMS	V	-	-	-77.21	8.67	-12.64	-69.43	-61.30	-8.13

Table 7-11. Radiated Spurious Emissions CH. 5 – ANT1 – OPEN


Channel:	5
Frequency (MHz):	6489.6
Preamble ID:	27
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turtable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1188	RMS	H	150	36	-86.12	-11.65	-12.64	-98.66	-85.30	-13.36
1200	RMS	H	150	36	-85.93	-11.59	-12.64	-98.41	-85.30	-13.11
1220	RMS	H	150	36	-86.05	-11.48	-12.64	-98.42	-85.30	-13.12
1561	RMS	H	-	-	-86.90	-9.27	-12.64	-97.06	-85.30	-11.76
1574	RMS	H	-	-	-86.92	-9.31	-12.64	-97.12	-85.30	-11.82
1609	RMS	H	-	-	-86.70	-9.48	-12.64	-97.07	-85.30	-11.77


Table 7-12. Radiated Spurious Emissions CH. 5 – ANT1 – GPS BANDS – OPEN

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 52 of 71

Channel 9 ANTENNA 1:

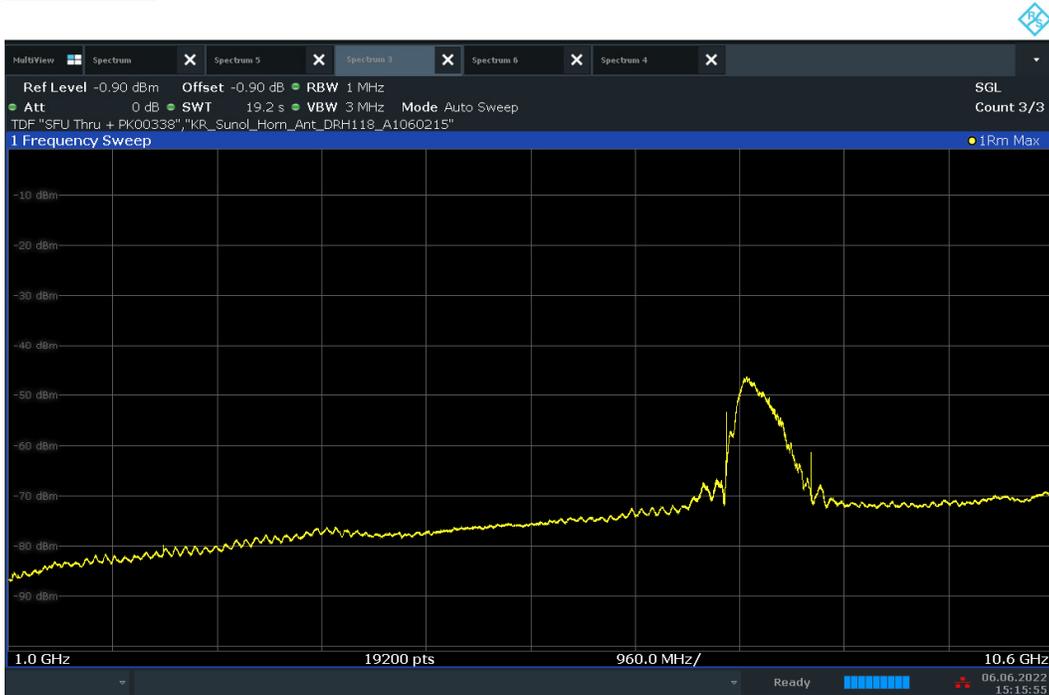


Plot 7-64. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 1

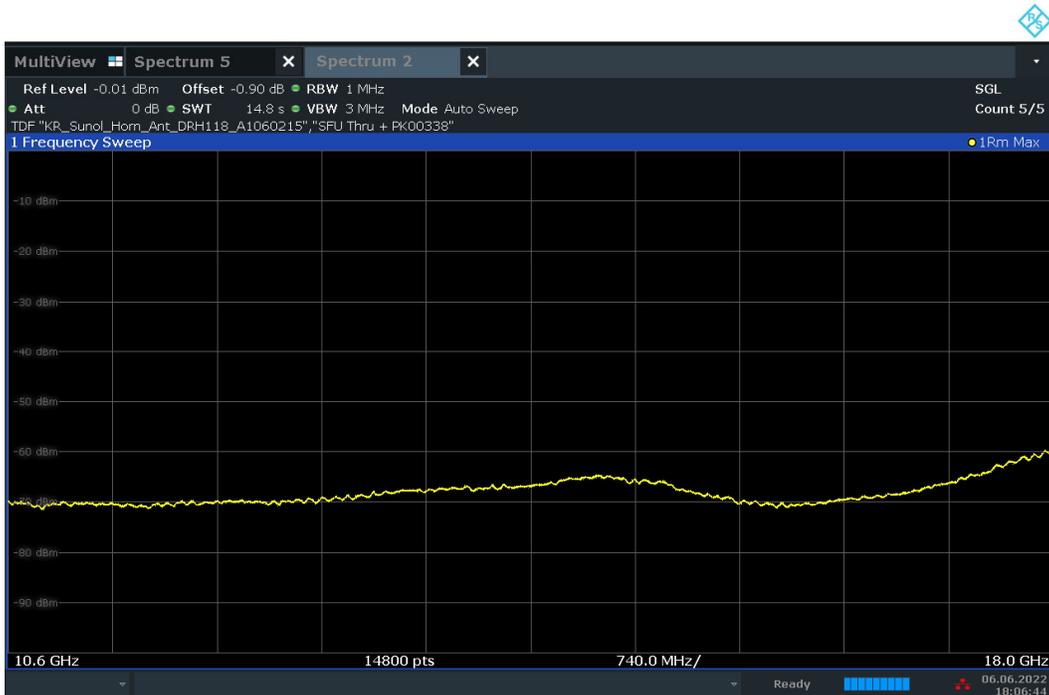


Plot 7-65. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 1

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 53 of 71

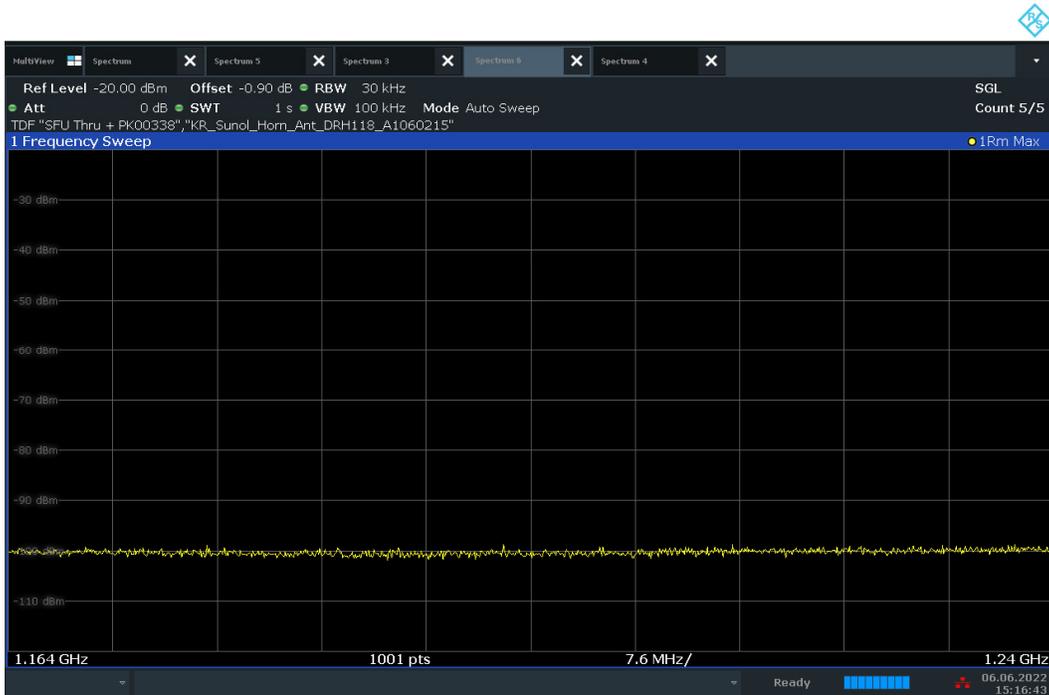


Plot 7-66. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 1 – GPS band

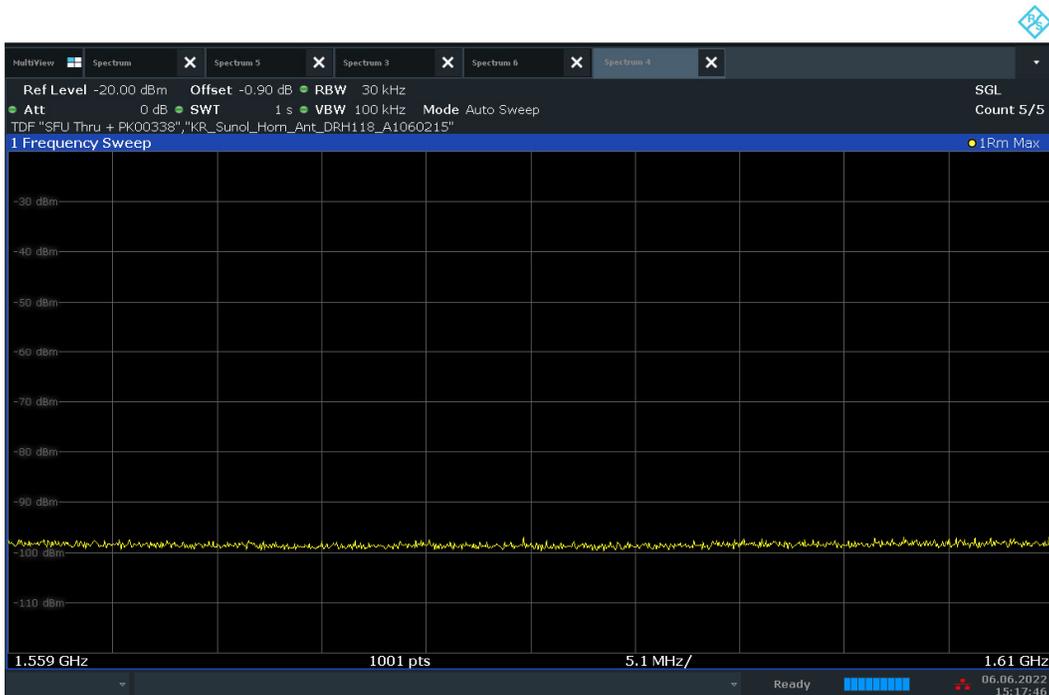

Plot 7-67. Radiated Spurious Pre-Scan 1559 - 1610 MHz - CH.9 - ANT 1 – GPS band

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 54 of 71

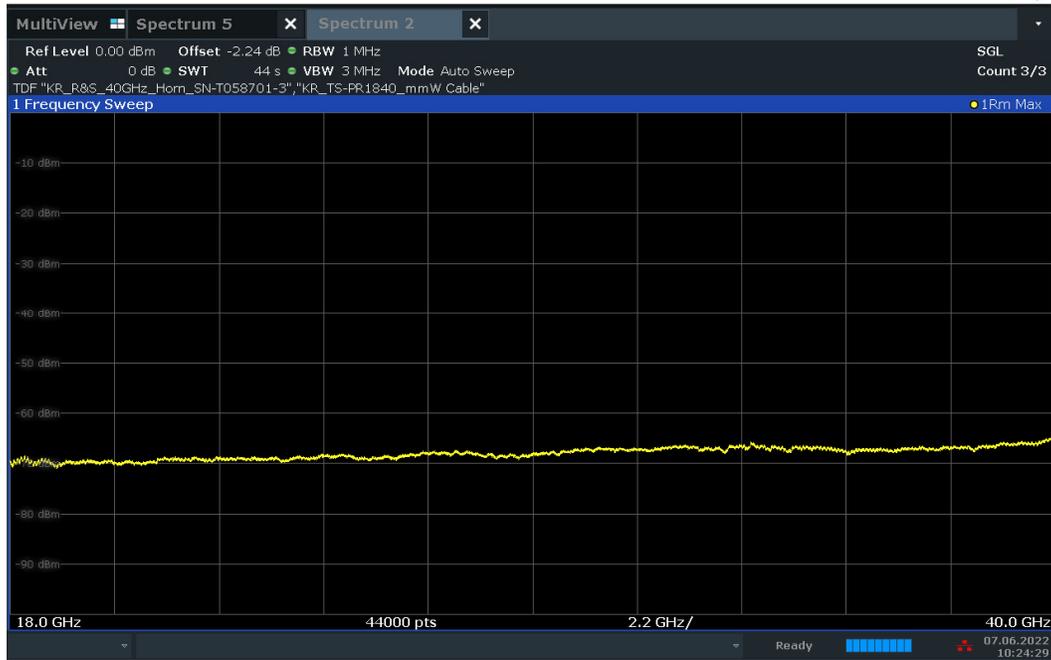

Plot 7-68. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 1

Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1431	RMS	H	-	-	-72.49	-9.70	-12.64	-83.08	-75.30	-7.78
1895	RMS	H	-	-	-72.60	-8.13	-12.64	-81.62	-63.30	-18.32
3097	RMS	H	-	-	-72.82	-5.04	-12.64	-78.75	-61.30	-17.45
10065	RMS	H	-	-	-75.51	6.49	-12.64	-69.91	-41.30	-28.61
15974	RMS	H	-	-	-76.05	6.74	-12.64	-70.20	-61.30	-8.90

Table 7-13. Radiated Spurious Emissions CH. 9 – ANT1 – CLOSE


Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1200	RMS	H	-	-	-86.46	-11.59	-12.64	-98.94	-85.30	-13.64
1217	RMS	H	-	-	-86.44	-11.50	-12.64	-98.83	-85.30	-13.53
1237	RMS	H	-	-	-86.44	-11.40	-12.64	-98.73	-85.30	-13.43
1584	RMS	H	-	-	-86.74	-9.35	-12.64	-96.98	-85.30	-11.68
1603	RMS	H	-	-	-86.70	-9.45	-12.64	-97.04	-85.30	-11.74
1610	RMS	H	-	-	-86.51	-9.49	-12.64	-96.89	-85.30	-11.59


Table 7-14. Radiated Spurious Emissions CH. 9 – ANT1 – GPS BANDs – CLOSE

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 55 of 71

Channel 9 ANTENNA 2:

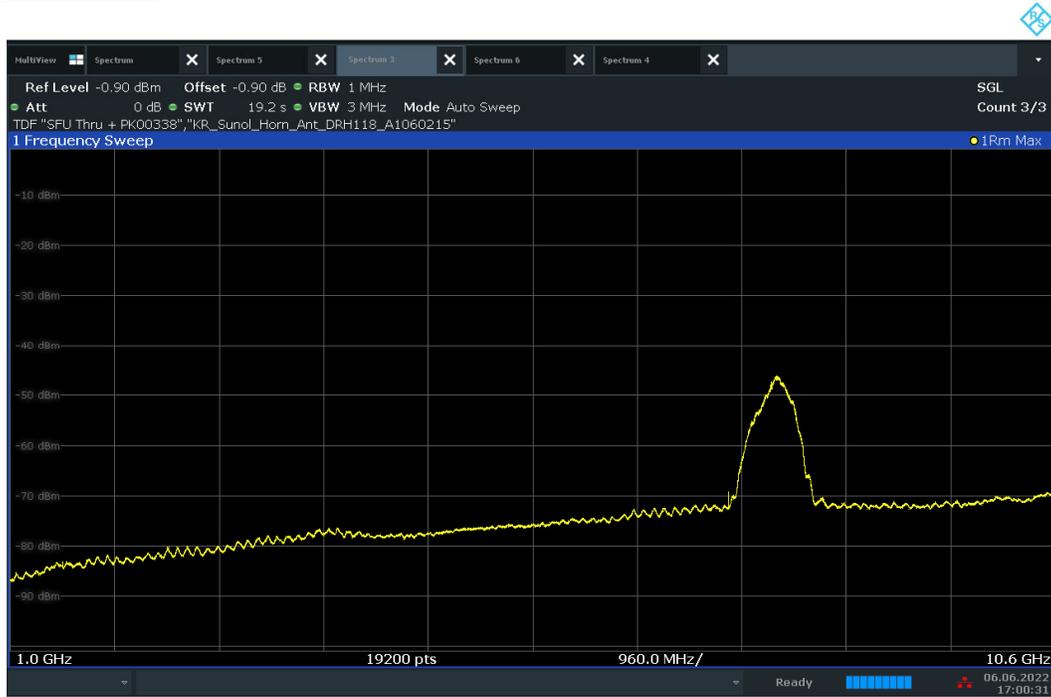


Plot 7-69. Radiated Spurious Pre-Scan 1000 - 10600 MHz - CH.9 - ANT 2

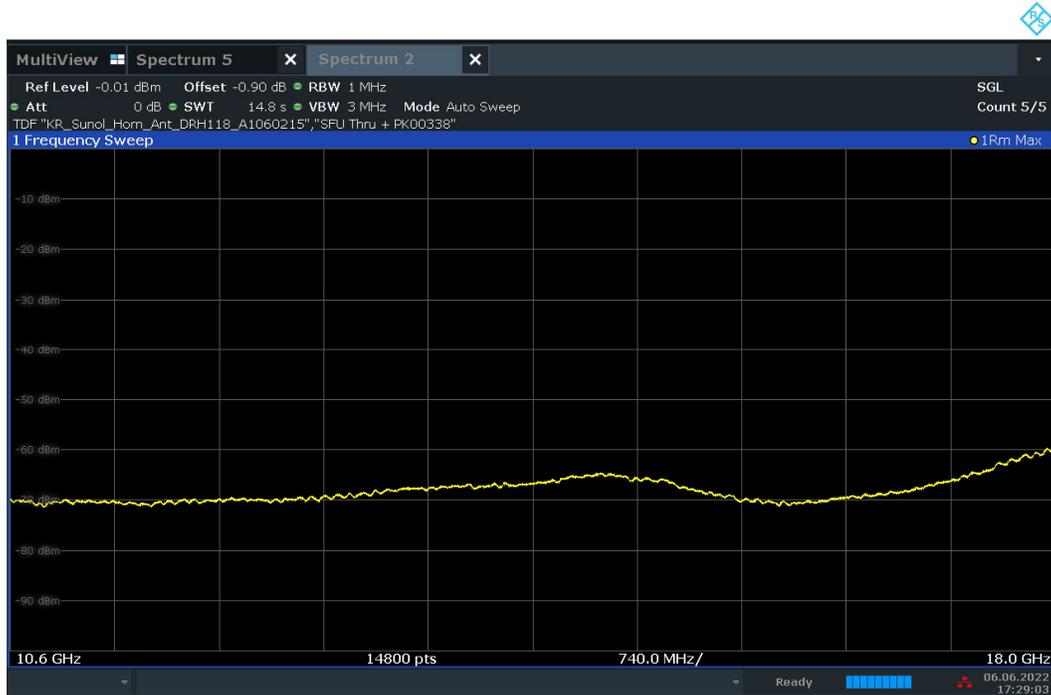


Plot 7-70. Radiated Spurious Pre-Scan 10600 - 18000 MHz - CH.9 - ANT 2

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 56 of 71

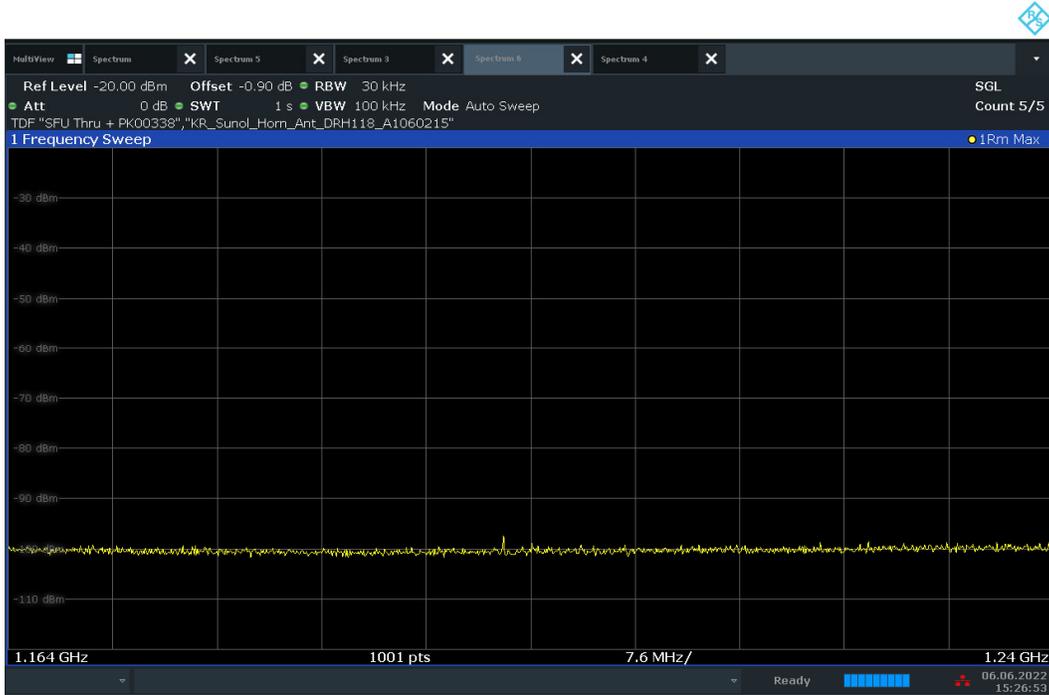


Plot 7-71. Radiated Spurious Pre-Scan 1164 - 1240 MHz - CH.9 - ANT 2 – GPS band

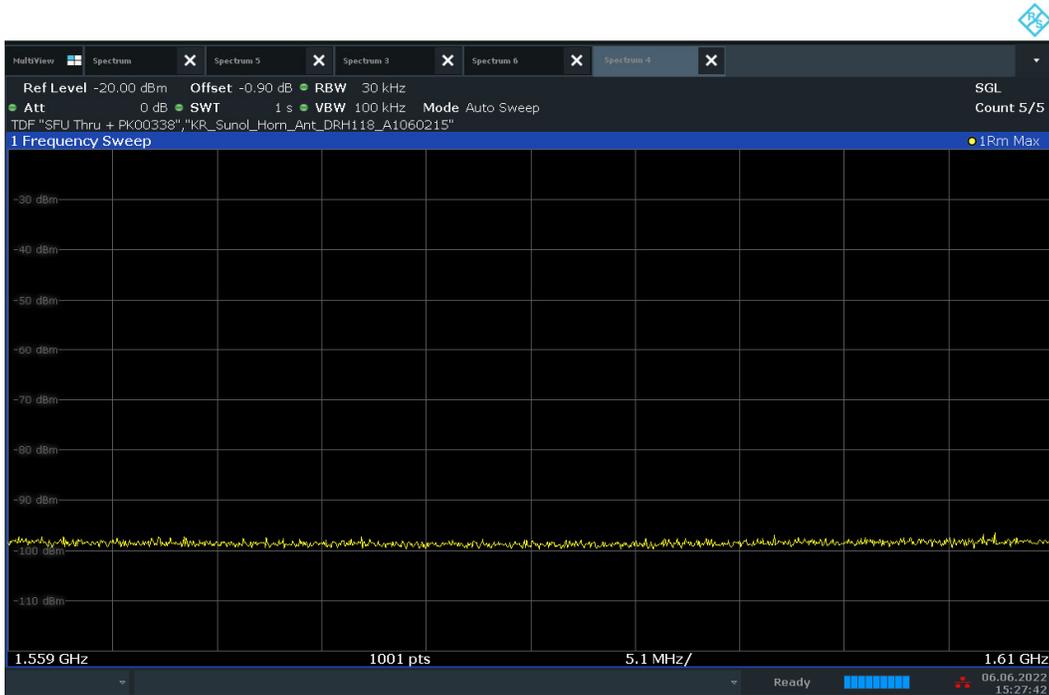

Plot 7-72. Radiated Spurious Pre-Scan 1559 - 1610 MHz – CH 9 - ANT 2 – GPS band

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 57 of 71

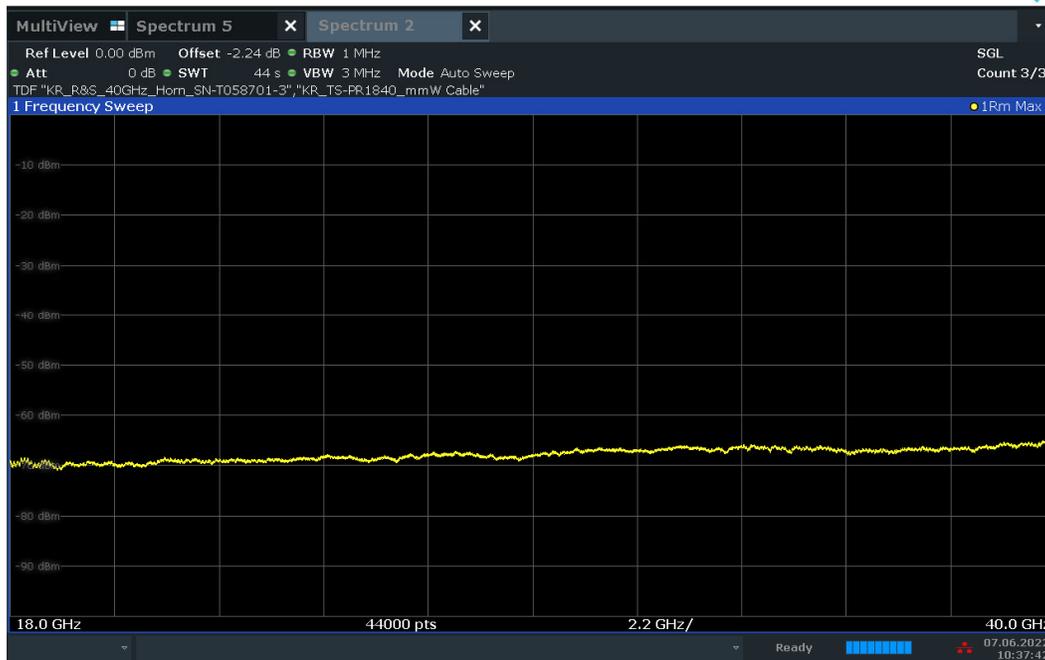

Plot 7-73. Radiated Spurious Pre-Scan 18 – 40 GHz - CH.9 - ANT 2

Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1484	RMS	V	-	-	-72.55	-9.72	-12.64	-83.16	-75.30	-7.86
1896	RMS	V	-	-	-72.78	-8.13	-12.64	-81.80	-63.30	-18.50
3093	RMS	V	-	-	-73.07	-5.10	-12.64	-79.06	-61.30	-17.76
10521	RMS	V	-	-	-75.81	7.32	-12.64	-69.38	-41.30	-28.08
15974	RMS	V	-	-	-76.25	6.74	-12.64	-70.40	-61.30	-9.10

Table 7-15. Radiated Spurious Emissions CH. 9 – ANT2 – OPEN

Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Dist. Corr. Factor[dB]	Spurious Emission Level[dBm]	Limit [dBm]	Margin [dB]
1200	RMS	H	150	141	-84.95	-11.59	-12.64	-97.43	-85.30	-12.13
1226	RMS	H	150	141	-86.30	-11.46	-12.64	-98.65	-85.30	-13.35
1236	RMS	H	150	141	-86.39	-11.40	-12.64	-98.68	-85.30	-13.38
1596	RMS	H	-	-	-86.69	-9.40	-12.64	-96.98	-85.30	-11.68
1606	RMS	H	-	-	-86.48	-9.47	-12.64	-96.84	-85.30	-11.54
1607	RMS	H	-	-	-86.16	-9.47	-12.64	-96.52	-85.30	-11.22

Table 7-16. Radiated Spurious Emissions CH. 9 – ANT2 – GPS BANDS – OPEN

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 58 of 71

7.6 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209(a), §15.519(c); RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 6 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-17 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [$\mu\text{V/m}$]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-17. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 59 of 71

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

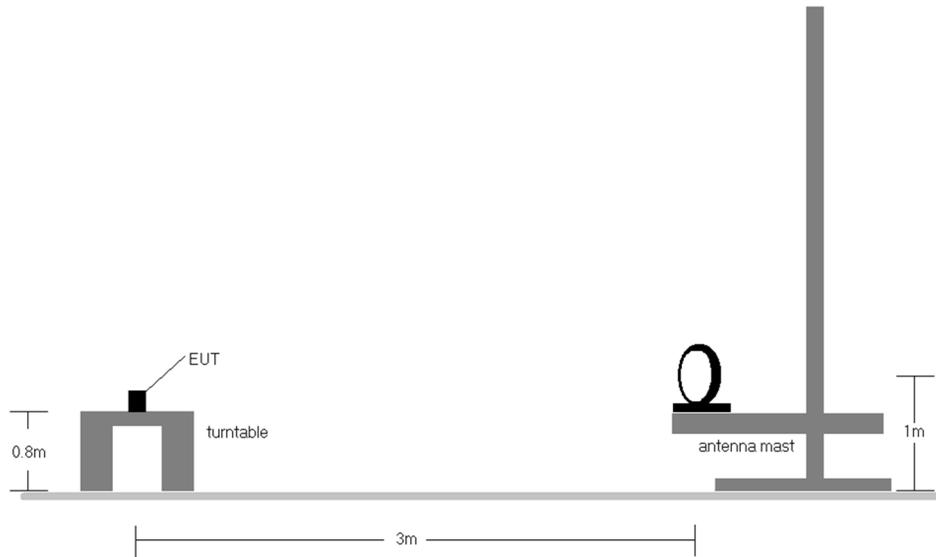


Figure 7-4. Radiated Test Setup < 30Mhz

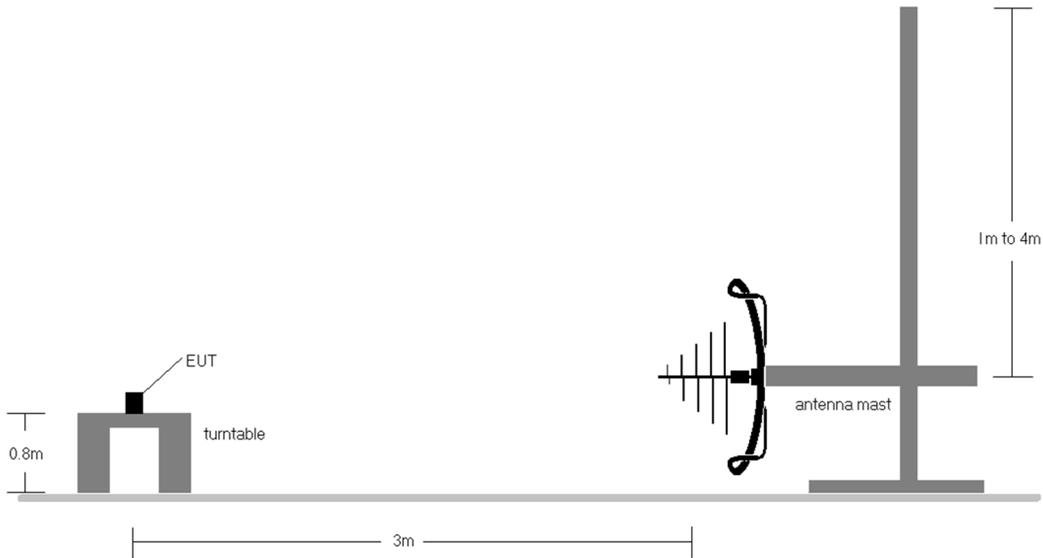



Figure 7-5. Radiated Test Setup < 1GHz

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 60 of 71

Test Notes

1. All emissions lying in restricted bands specified in §15.205 and RSS-Gen(8.10) are below the limit shown in Table 7-17.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
4. Emissions were measured at a 3 meter test distance.
5. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
6. No spurious emissions were detected within 20dB of the limit below 30MHz.
7. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
8. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 61 of 71

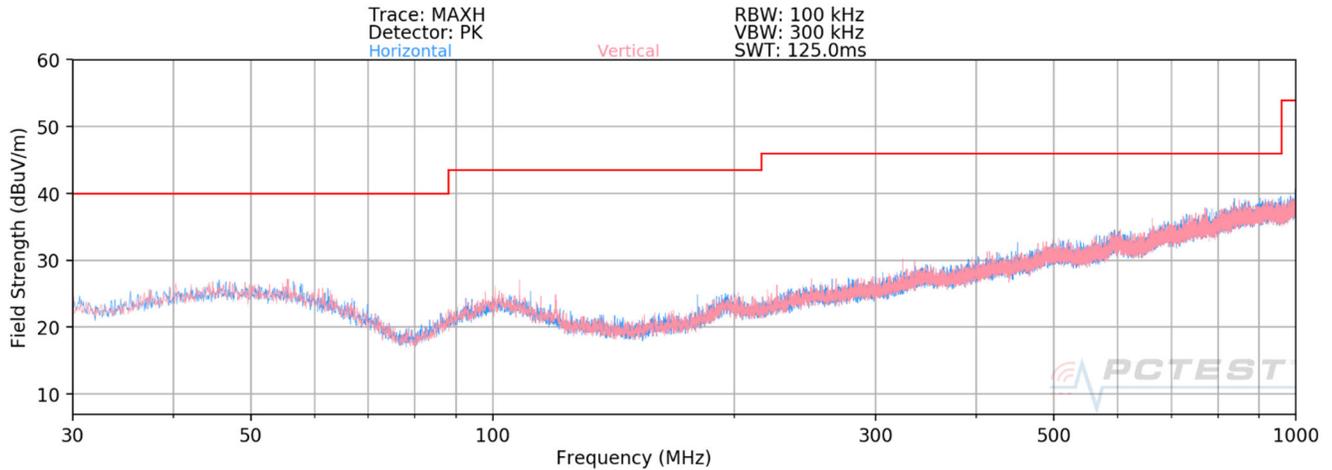


Plot 7-74. 30MHz - 1 GHz Pre-Scan Plots ANT1 – CH 5

Channel:	5
Frequency (MHz):	6489.6
Preamble ID:	27
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
120.19	Quasi-Peak	V	105	36	-104.90	10.58	12.68	43.52	-30.85
125.00	Quasi-Peak	V	116	94	-102.60	9.91	14.31	43.52	-29.21
833.17	Quasi-Peak	V	-	-	-110.60	24.15	20.55	46.02	-25.47

Table 7-18. Radiated Spurious Emissions CH. 5 – ANT1 – OPEN

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 62 of 71

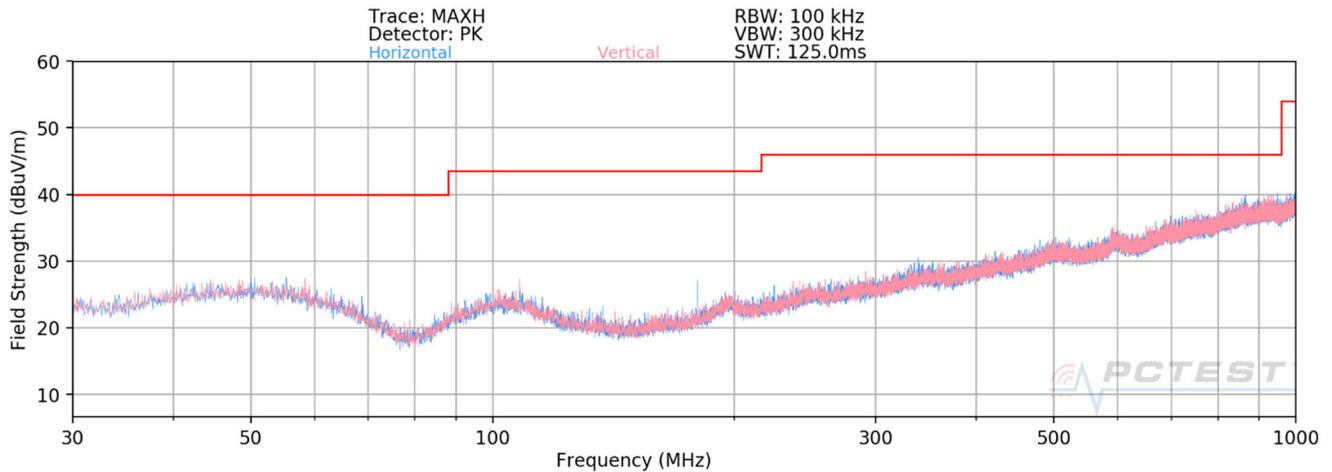


Plot 7-75. 30MHz – 1 GHz Pre-Scan Plots ANT1 – CH 9

Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]
119.56	Quasi-Peak	V	145	267	-103.60	10.64	14.04	43.52	-29.49
180.02	Quasi-Peak	H	105	30	-98.30	10.59	19.29	43.52	-24.23
932.14	Quasi-Peak	H	-	-	-110.00	25.26	22.26	46.02	-23.76

Table 7-19. Radiated Spurious Emissions CH. 9 – ANT1 – CLOSE

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 63 of 71

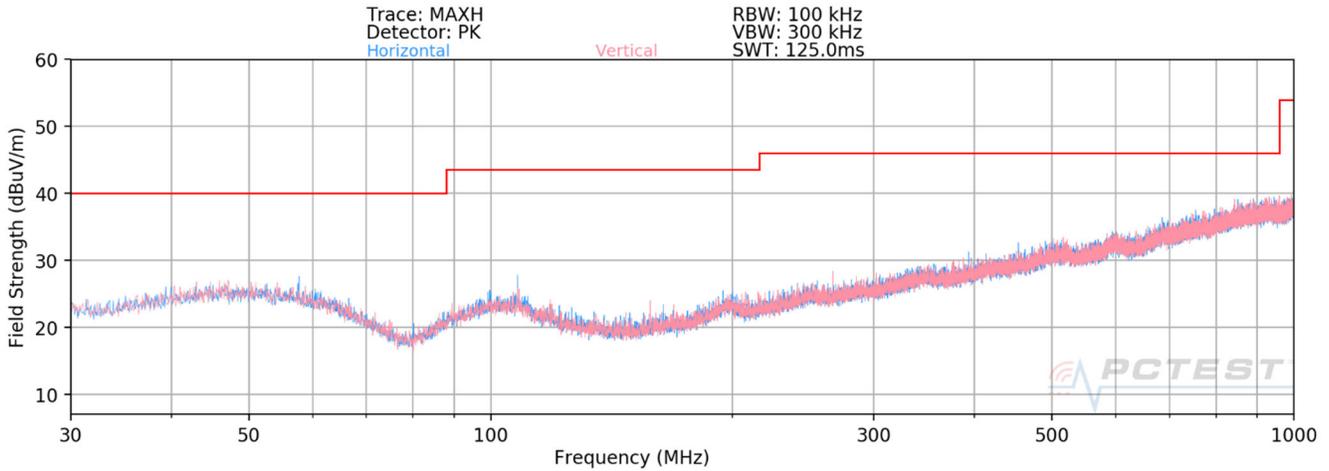

Plot 7-76. 30MHz - 1 GHz Pre-Scan Plots ANT2 – CH 9

Channel:	9
Frequency (MHz):	7987.2
Preamble ID:	9
Config:	SP3

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
108.00	Quasi-Peak	H	148	22	-94.80	12.65	24.85	43.52	-18.68
167.74	Quasi-Peak	V	323	239	-99.70	9.79	17.09	43.52	-26.44
296.99	Quasi-Peak	V	315	214	-106.80	14.66	14.86	46.02	-31.16

Table 7-20. Radiated Spurious Emissions CH. 9 – ANT2 – OPEN

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 64 of 71

7.7 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All emissions must not exceed the limits shown in Table 7-21 per FCC 15.207 and RSS-Gen (8.8).

Frequency of emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 7-21. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.4-2014

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 65 of 71

Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


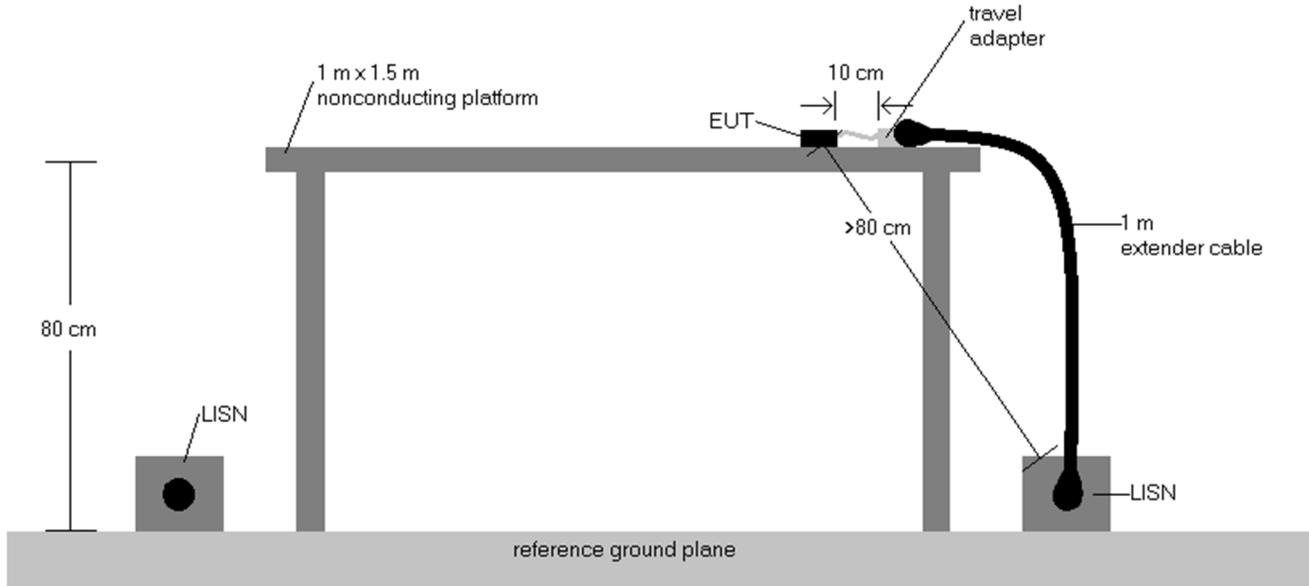


Figure 7-6. Test Instrument & Measurement Setup

Test Notes

1. All Modes of operation were investigated and the worst-case emissions are reported.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 and RSS-Gen.
3. L1 = Phase; N = Neutral
4. $Corr. (dB) = Cable\ loss (dB) + LISN\ insertion\ factor (dB)$
5. $QP/AV\ Level (dB\mu V) = QP/AV\ Reading (dB\mu V) + Factor (dB)$
6. $Margin (dB) = QP/AV\ Limit (dB\mu V) - QP/AV\ Level (dB\mu V)$
7. Traces shown in plot are made using a peak detector.
8. Deviations to the Specifications: None.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 66 of 71

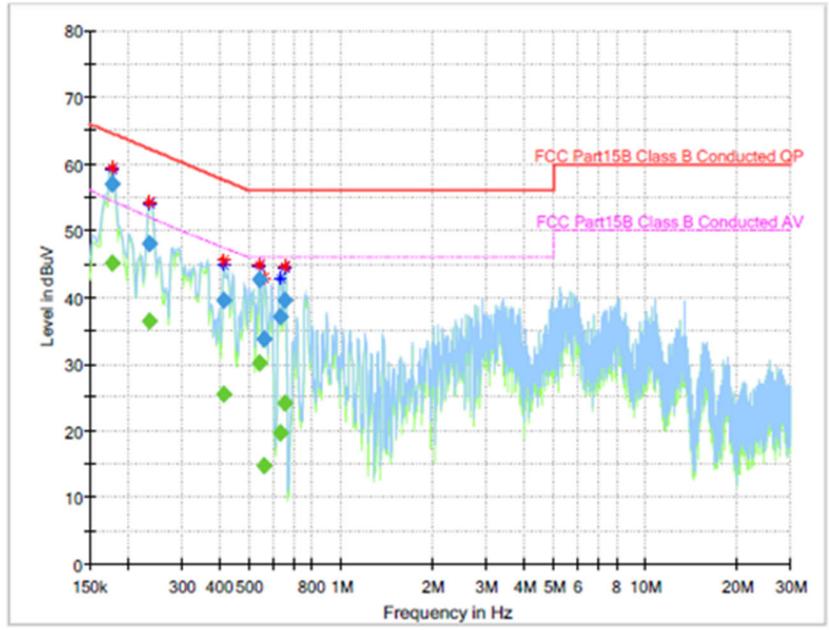


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.176865	---	45.23	54.51	9.28	1000.0	9.000	L1	10.0
0.176865	56.96	---	64.63	7.67	1000.0	9.000	L1	10.0
0.236565	---	36.33	51.98	15.65	1000.0	9.000	L1	9.7
0.236565	47.96	---	62.22	14.26	1000.0	9.000	L1	9.7
0.412680	---	25.37	47.47	22.10	1000.0	9.000	L1	9.9
0.412680	39.47	---	57.59	18.12	1000.0	9.000	L1	9.9
0.541035	---	30.06	46.00	15.94	1000.0	9.000	L1	9.9
0.541035	42.62	---	56.00	13.38	1000.0	9.000	L1	9.9
0.561930	---	14.71	46.00	31.29	1000.0	9.000	L1	9.9
0.561930	33.69	---	56.00	22.31	1000.0	9.000	L1	9.9
0.636555	---	19.56	46.00	26.44	1000.0	9.000	L1	9.9
0.636555	37.07	---	56.00	18.93	1000.0	9.000	L1	9.9
0.651480	---	24.18	46.00	21.82	1000.0	9.000	L1	9.9
0.651480	39.63	---	56.00	16.37	1000.0	9.000	L1	9.9

Plot 7-77. Line Conducted Plot (L1) ANT 1 – CH 9

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 67 of 71

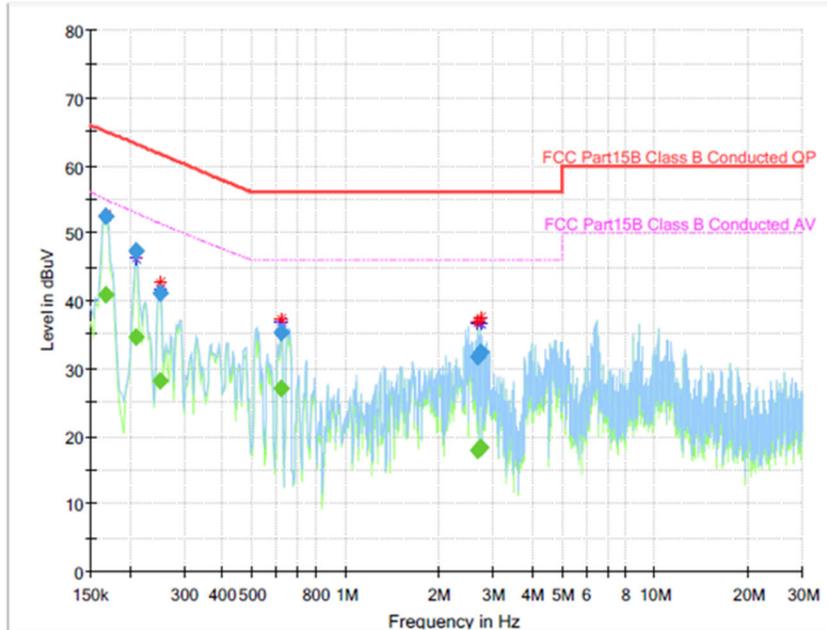


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.167910	---	40.94	54.98	14.04	1000.0	9.000	N	10.0
0.167910	52.57	---	65.06	12.49	1000.0	9.000	N	10.0
0.209700	---	34.65	53.02	18.37	1000.0	9.000	N	9.8
0.209700	47.34	---	63.22	15.88	1000.0	9.000	N	9.8
0.251490	---	28.21	51.47	23.26	1000.0	9.000	N	9.7
0.251490	41.20	---	61.71	20.50	1000.0	9.000	N	9.7
0.618645	---	27.13	46.00	18.87	1000.0	9.000	N	9.9
0.618645	35.31	---	56.00	20.69	1000.0	9.000	N	9.9
2.681280	---	17.91	46.00	28.09	1000.0	9.000	N	9.8
2.681280	31.79	---	56.00	24.21	1000.0	9.000	N	9.8
2.723070	---	18.34	46.00	27.66	1000.0	9.000	N	9.8
2.723070	32.44	---	56.00	23.56	1000.0	9.000	N	9.8

Plot 7-78. Line Conducted Plot (N) ANT 1 – CH 9

MEASUREMENT REPORT (CERTIFICATION)			Approved by: Technical Manager
FCC ID: A3LSMF936U	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 68 of 71

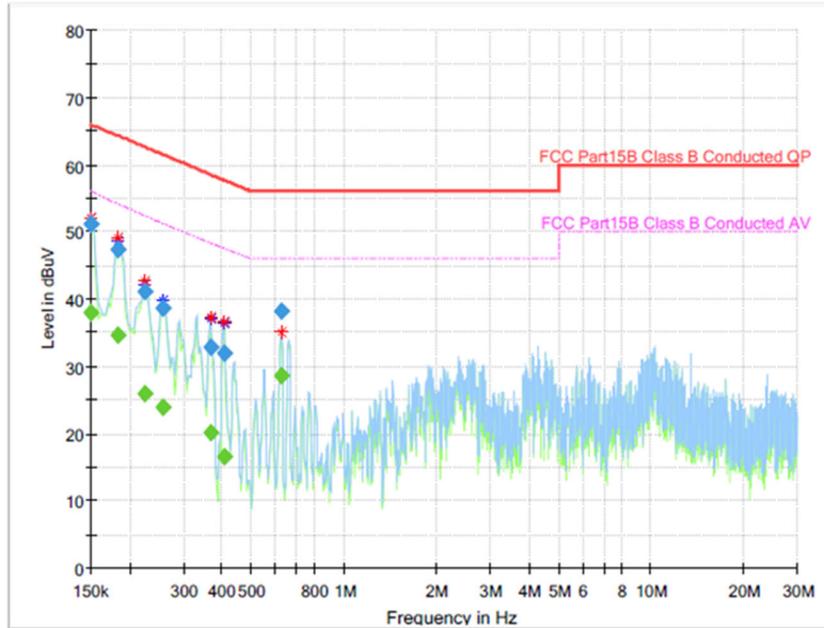


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	Average (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.150000	---	37.95	56.00	18.05	1000.0	9.000	L1	9.8
0.150000	51.10	---	66.00	14.90	1000.0	9.000	L1	9.8
0.182835	---	34.72	54.22	19.50	1000.0	9.000	L1	10.0
0.182835	47.33	---	64.36	17.02	1000.0	9.000	L1	10.0
0.224625	---	25.98	52.43	26.44	1000.0	9.000	L1	9.8
0.224625	41.22	---	62.65	21.43	1000.0	9.000	L1	9.8
0.257460	---	23.85	51.27	27.42	1000.0	9.000	L1	9.7
0.257460	38.63	---	61.51	22.88	1000.0	9.000	L1	9.7
0.367905	---	20.02	48.36	28.34	1000.0	9.000	L1	9.8
0.367905	32.90	---	58.55	25.65	1000.0	9.000	L1	9.8
0.406710	---	16.43	47.58	31.15	1000.0	9.000	L1	9.9
0.406710	32.05	---	57.72	25.66	1000.0	9.000	L1	9.9
0.624615	---	28.55	46.00	17.45	1000.0	9.000	L1	9.9
0.624615	38.16	---	56.00	17.84	1000.0	9.000	L1	9.9

Plot 7-79. Line Conducted Plot (L1) ANT 2 – CH 9

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 69 of 71

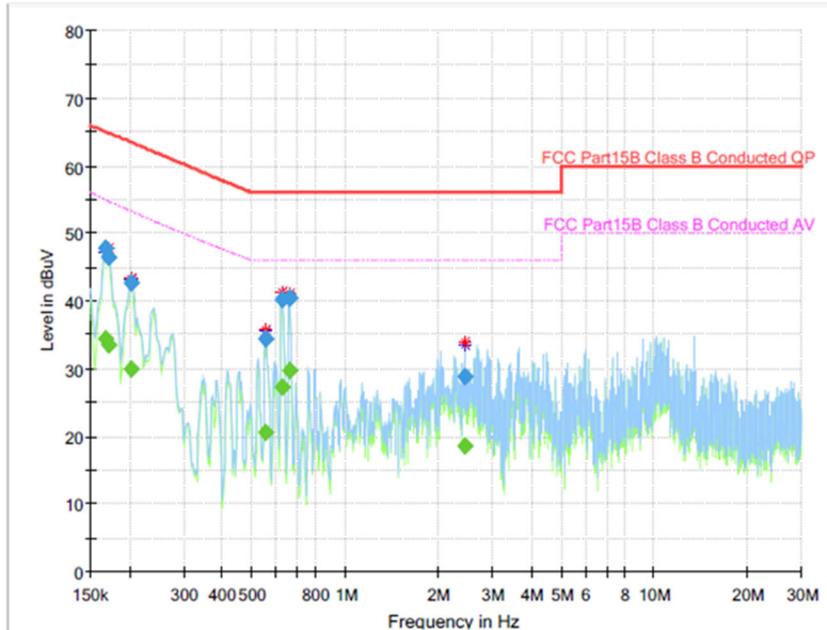

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.167910	---	34.41	54.98	20.57	1000.0	9.000	N	10.0
0.167910	47.87	---	65.06	17.20	1000.0	9.000	N	10.0
0.170895	---	33.58	54.82	21.24	1000.0	9.000	N	10.0
0.170895	46.58	---	64.92	18.33	1000.0	9.000	N	10.0
0.203730	---	29.84	53.27	23.42	1000.0	9.000	N	9.9
0.203730	42.73	---	63.46	20.73	1000.0	9.000	N	9.9
0.555960	---	20.52	46.00	25.48	1000.0	9.000	N	9.9
0.555960	34.39	---	56.00	21.61	1000.0	9.000	N	9.9
0.624615	---	27.26	46.00	18.74	1000.0	9.000	N	9.9
0.624615	40.22	---	56.00	15.78	1000.0	9.000	N	9.9
0.660435	---	29.81	46.00	16.19	1000.0	9.000	N	9.9
0.660435	40.40	---	56.00	15.60	1000.0	9.000	N	9.9
2.433525	---	18.59	46.00	27.41	1000.0	9.000	N	9.8
2.433525	28.84	---	56.00	27.16	1000.0	9.000	N	9.8

Plot 7-80. Line Conducted Plot (N) ANT 2 – CH 9

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 70 of 71

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF936U** has been tested to comply with the requirements specified in §15.519 and §15.521 of the FCC rules.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-12.A3L	Test Dates: 05/12 – 06/08/2022	EUT Type: Portable Handset	Page 71 of 71