



Plot 7-426. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 117)

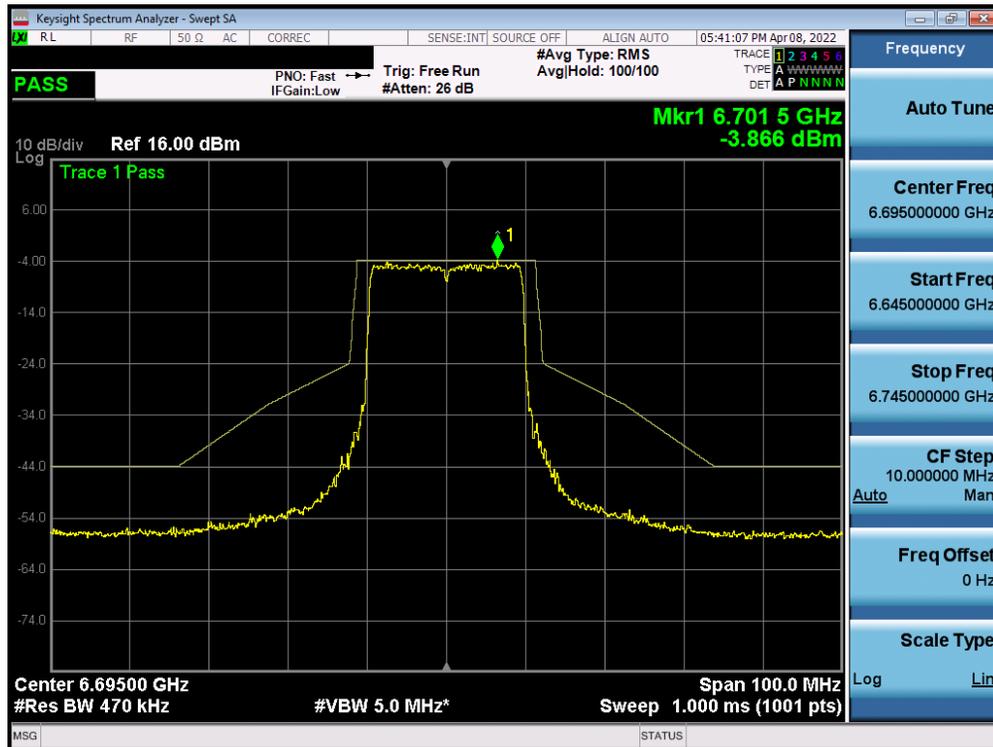


Plot 7-427. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 149)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 246 of 302

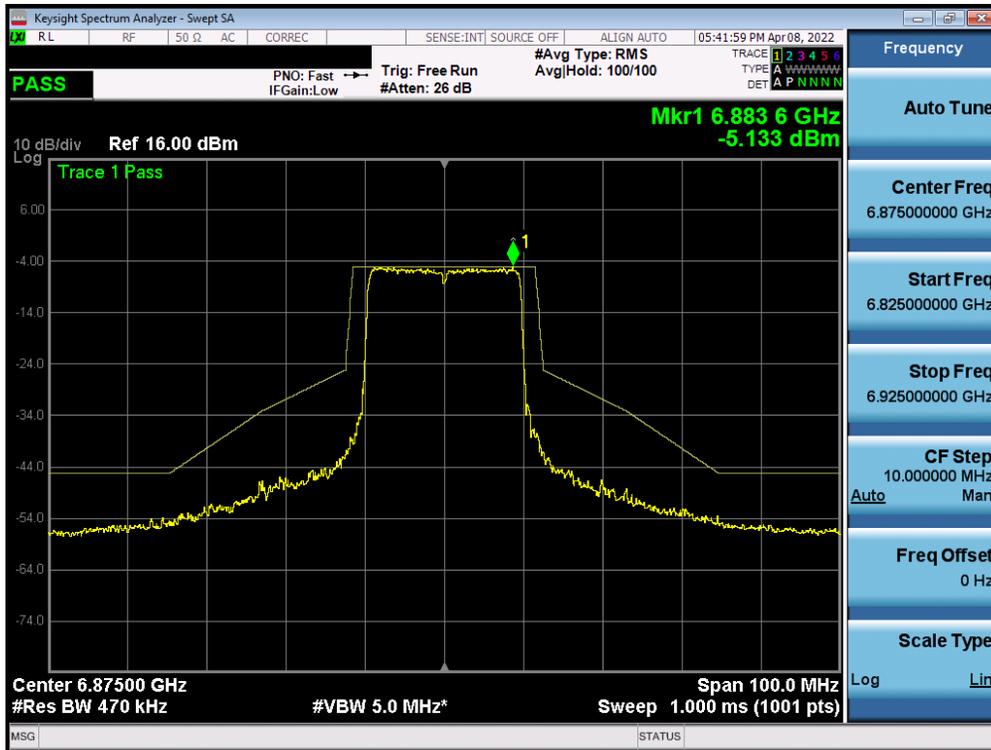


Plot 7-428. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 185)

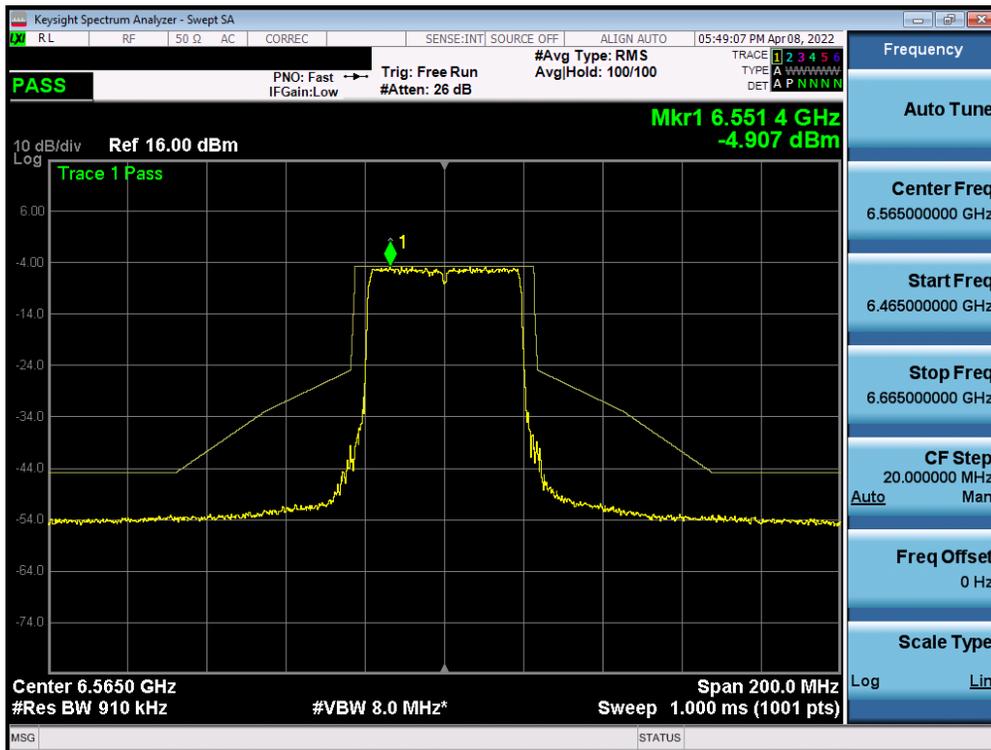


Plot 7-429. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 123)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 247 of 302

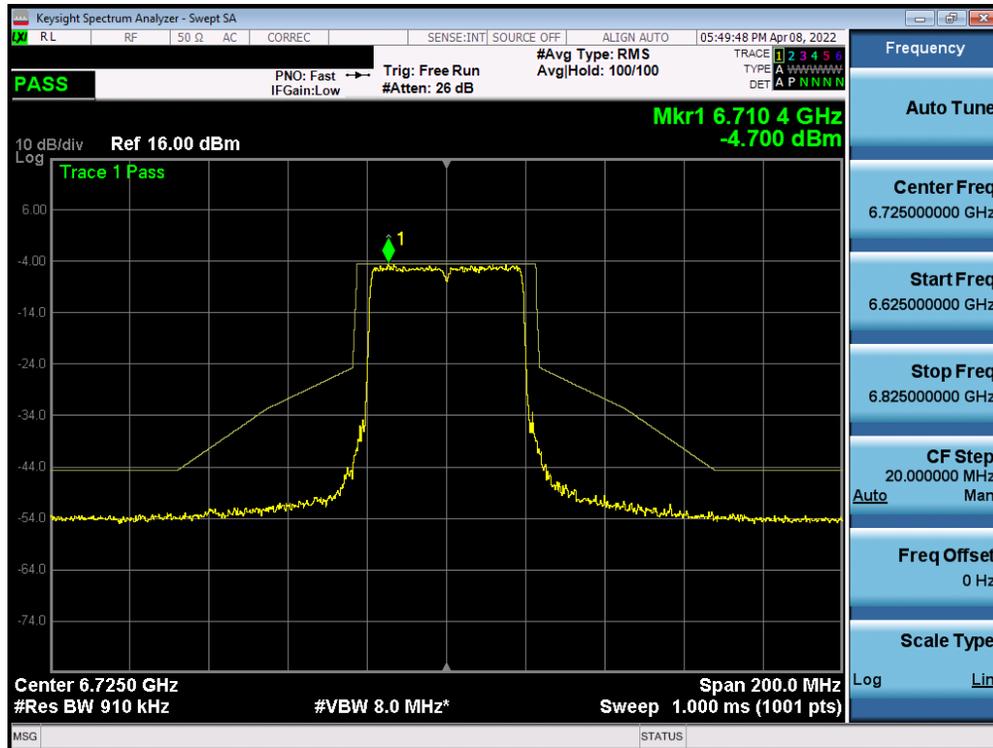


Plot 7-430. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 155)

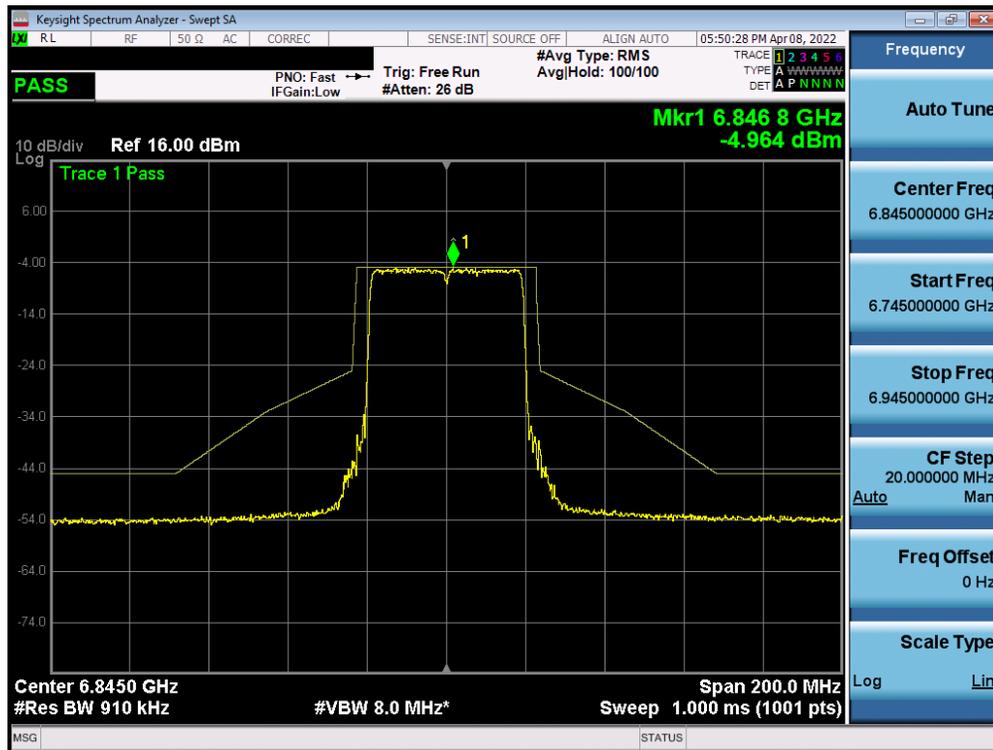


Plot 7-431. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 179)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 248 of 302

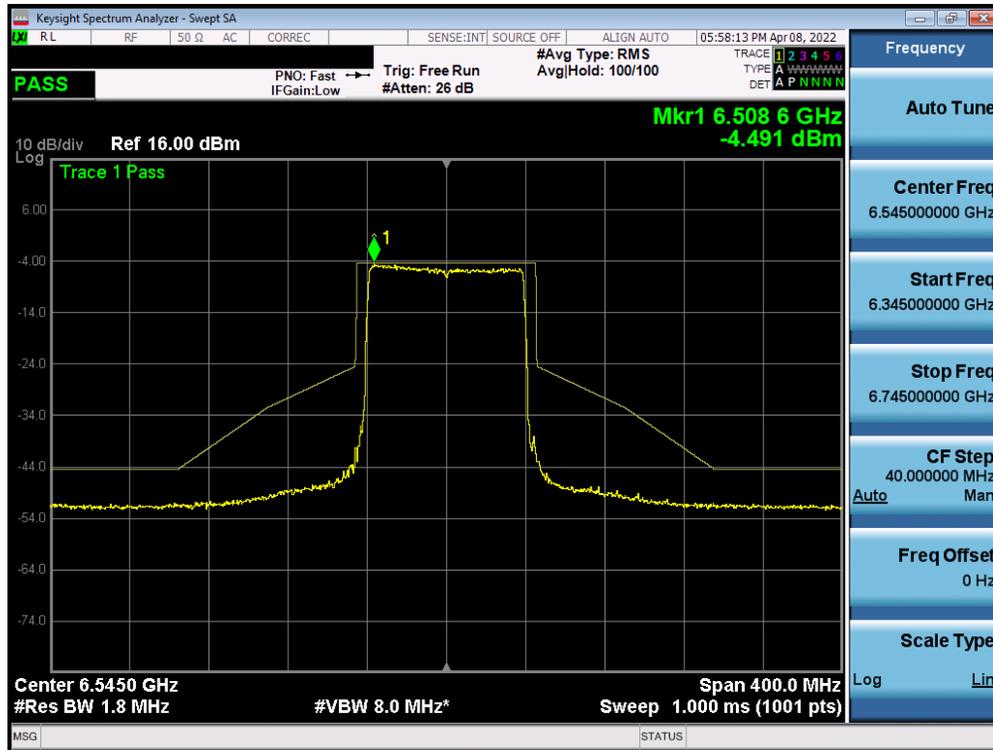


Plot 7-432. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 119)

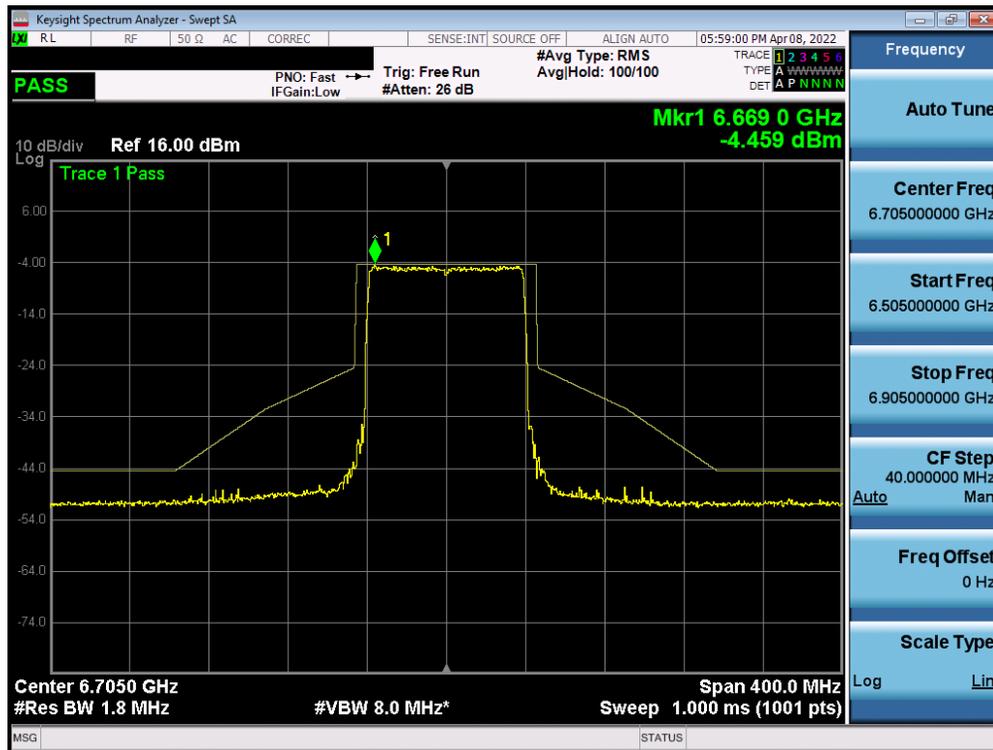


Plot 7-433. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 151)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 249 of 302

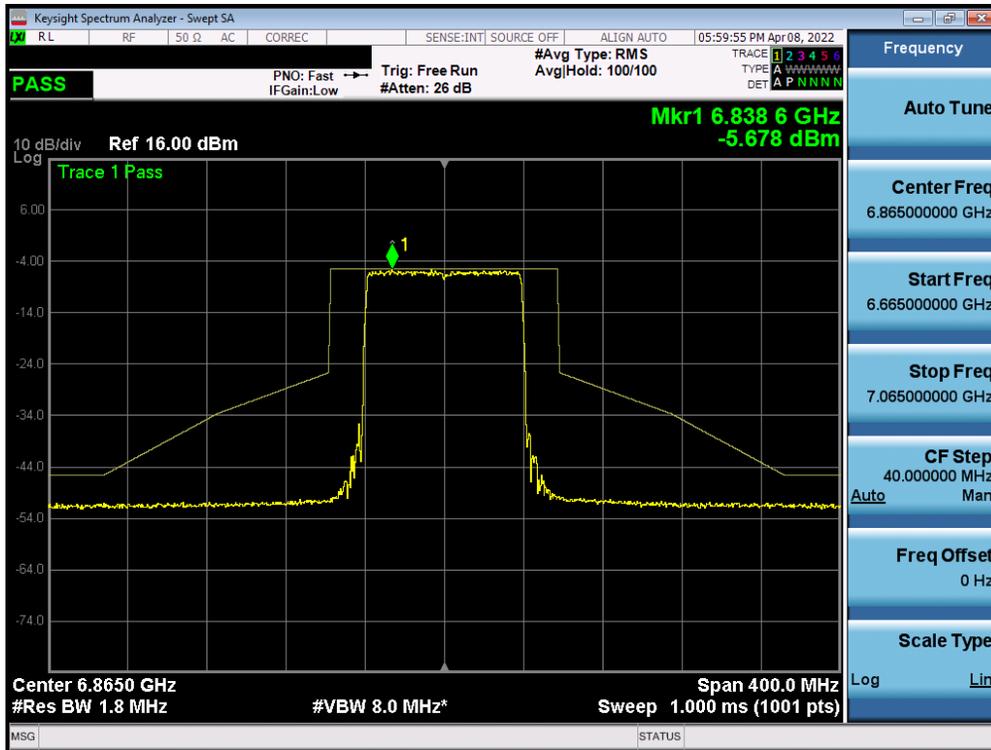


Plot 7-434. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 7) – Ch. 183)

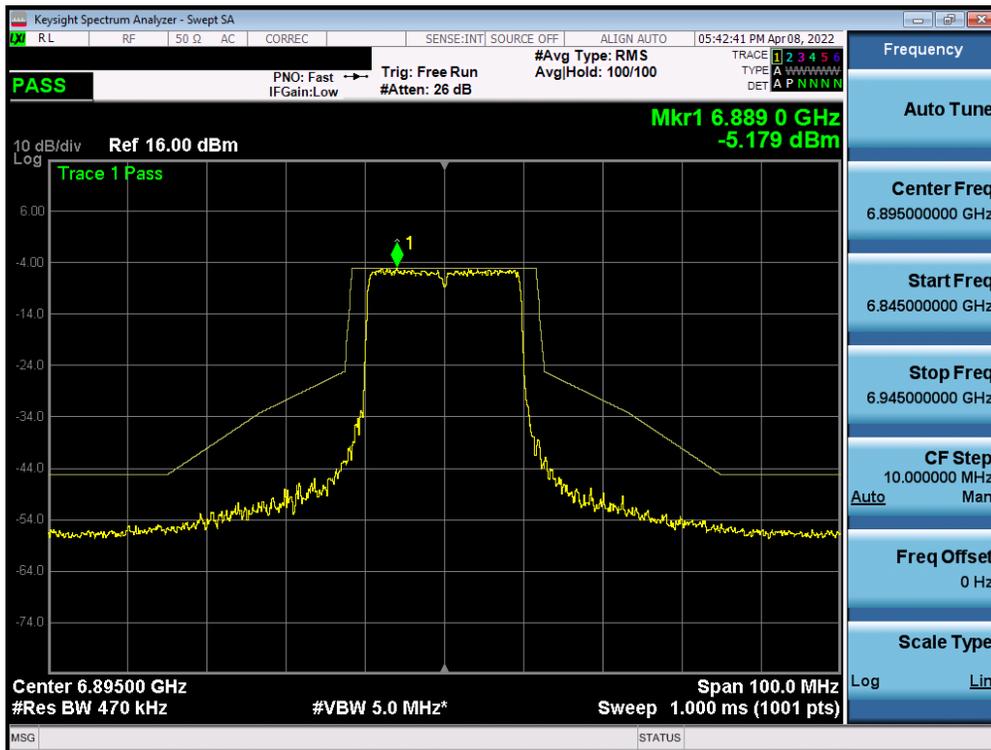


Plot 7-435. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 189)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 250 of 302

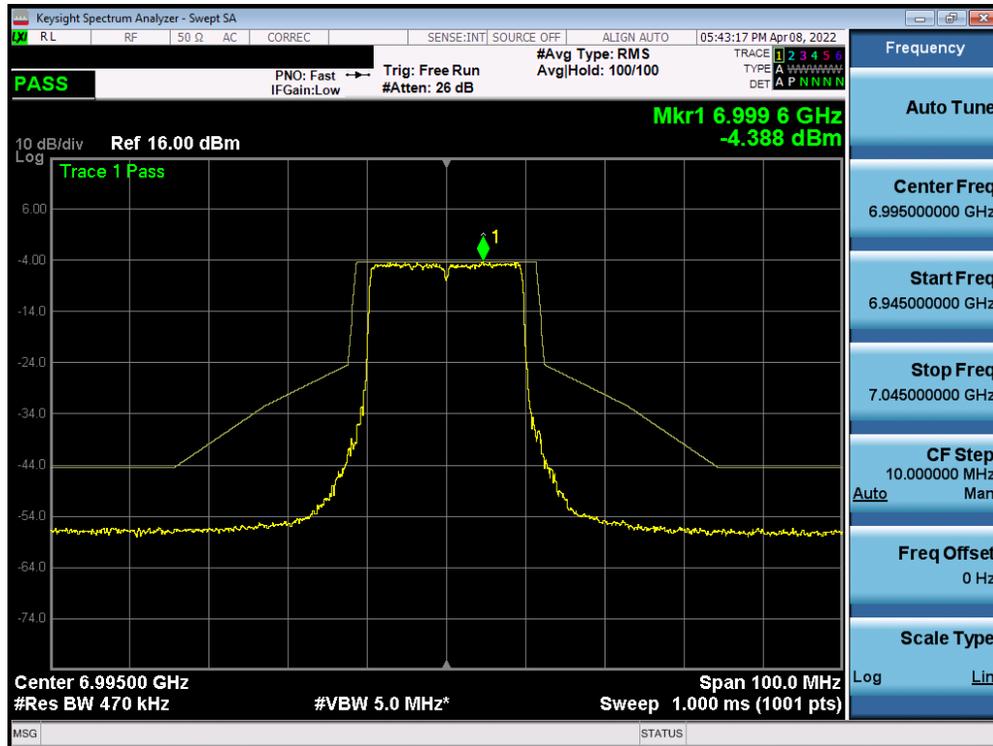


Plot 7-436. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 209)

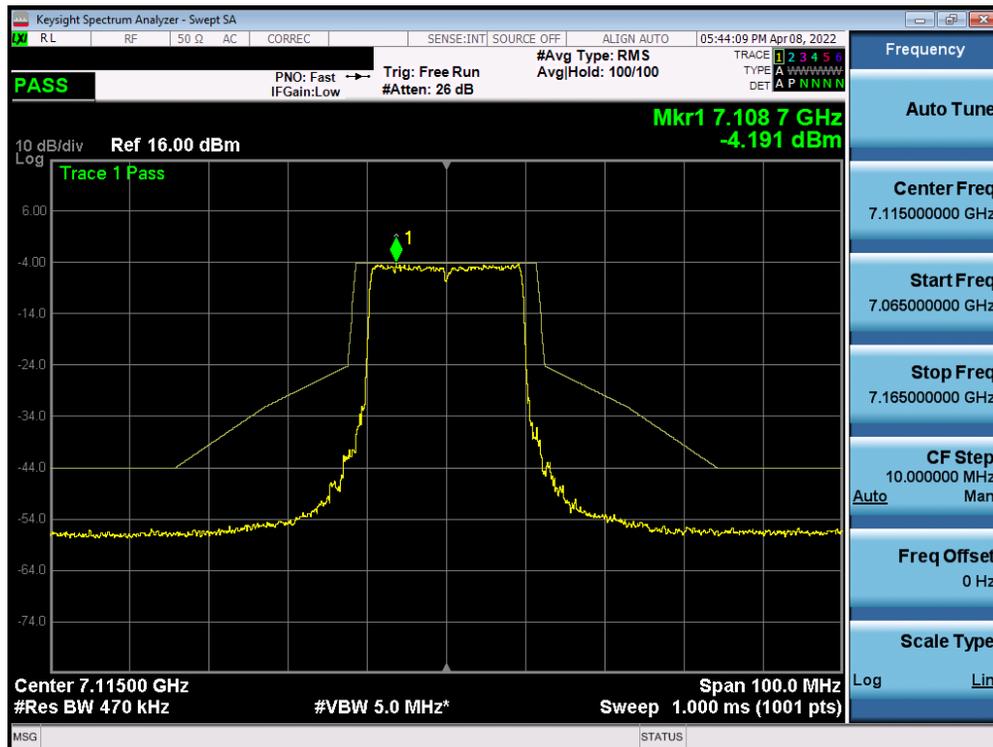


Plot 7-437. In-Band Emission Plot MIMO ANT2 (20MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 233)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 251 of 302

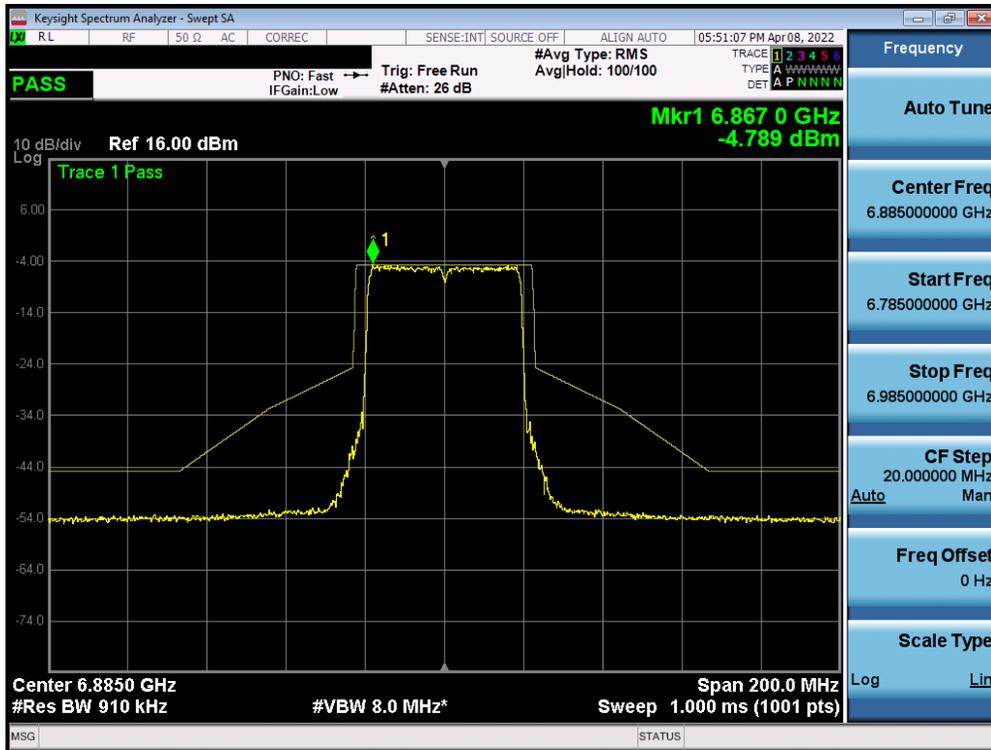


Plot 7-438. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 187)

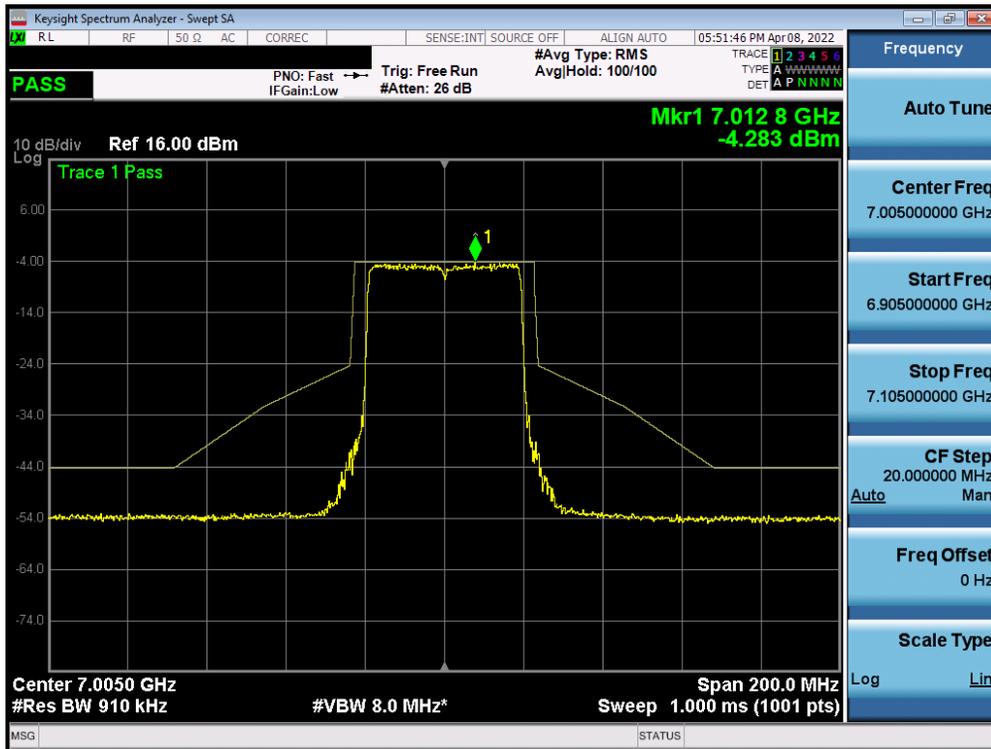


Plot 7-439. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 211)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 252 of 302

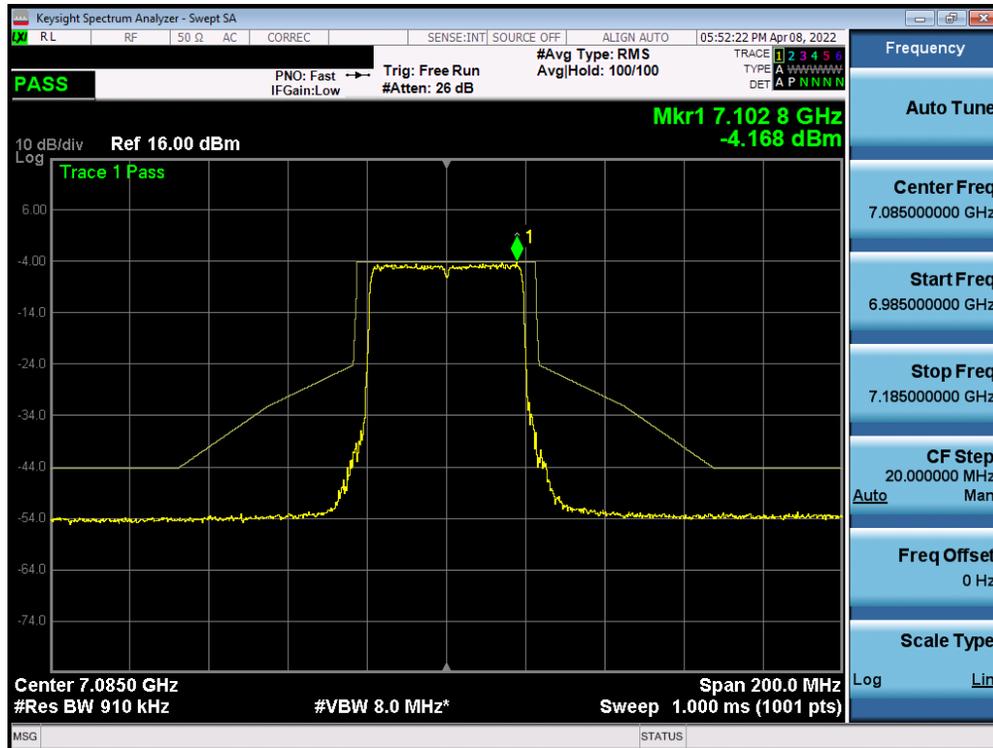


Plot 7-440. In-Band Emission Plot MIMO ANT2 (40MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 227)

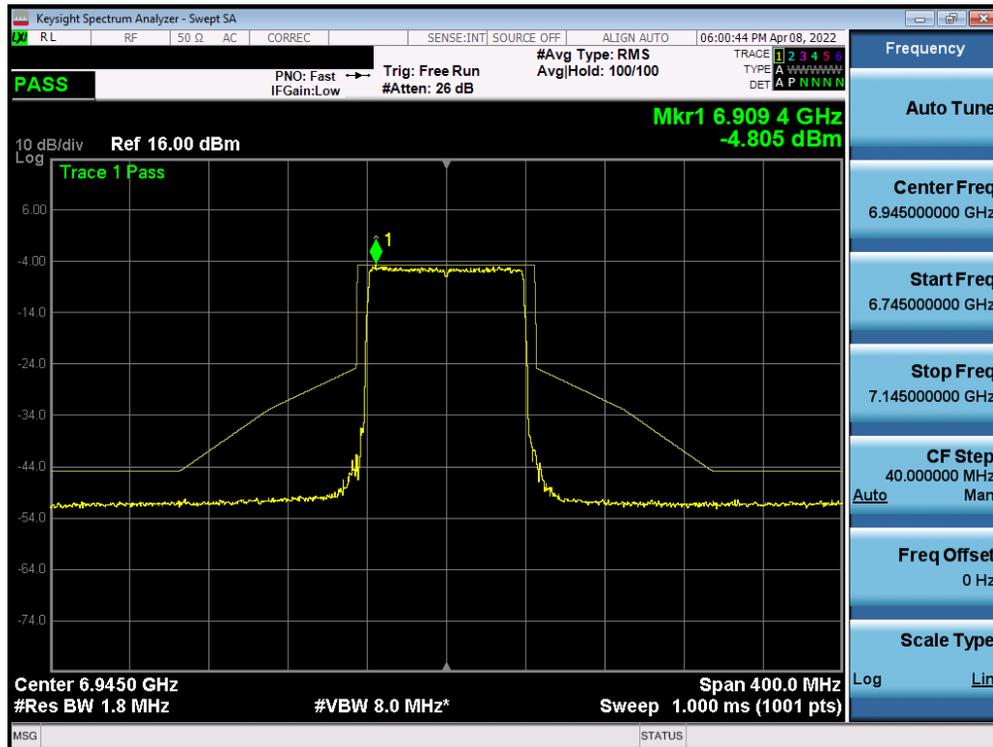

Plot 7-441. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 199)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 253 of 302

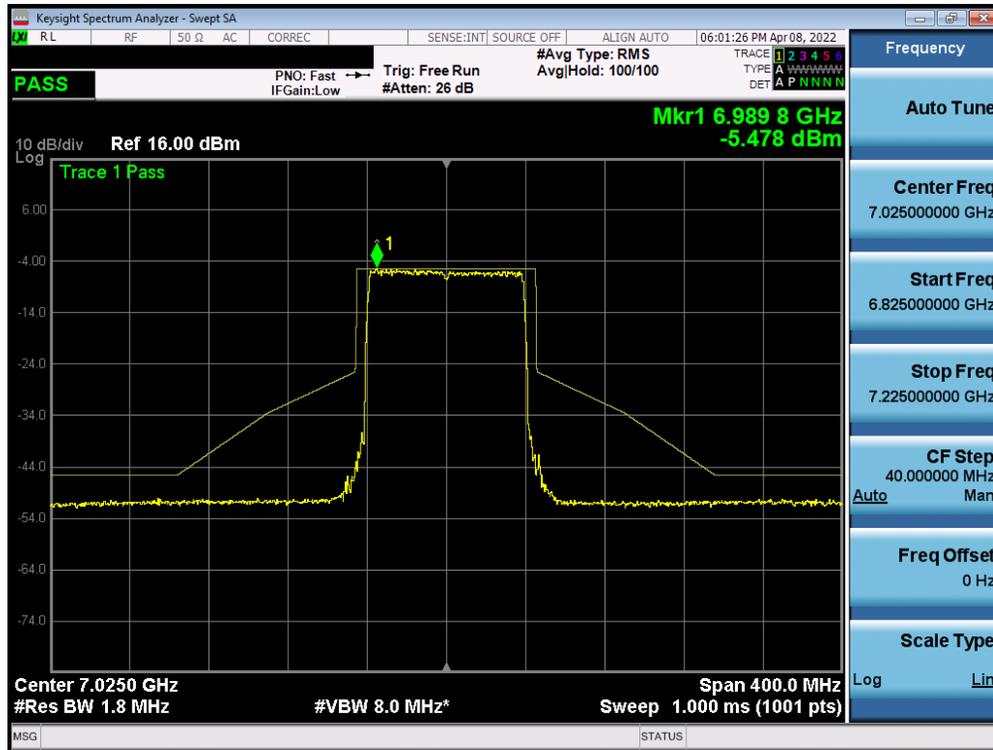

Plot 7-442. In-Band Emission Plot MIMO ANT2 (80MHz BW 802.11ax (Full Tone) (UNII Band 8) – Ch. 215)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 254 of 302

7.6 Contention Based Protocol – 802.11ax §15.407(d)(6)

Test Overview and Limit

Indoor access points, subordinate devices and client devices operating in the 5.925-7.125 GHz band (herein referred to as unlicensed devices) are required to use technologies that include a contention-based protocol to avoid co-channel interference with incumbent devices sharing the band. To ensure incumbent co-channel operations are detected in a technology-agnostic manner, unlicensed devices are required to detect co-channel radio frequency energy (energy detect) and avoid simultaneous transmission.

Unlicensed indoor low-power devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain.

To ensure incumbent operations are reliably detected in the band, low power indoor devices must detect RF energy throughout their intended operating channel.

Test Procedure Used

ANSI C63.10-2013 – Section 12.3.2.2
KDB 987594 D02 v01r01

Test Settings

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EEUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10 MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 255 of 302

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

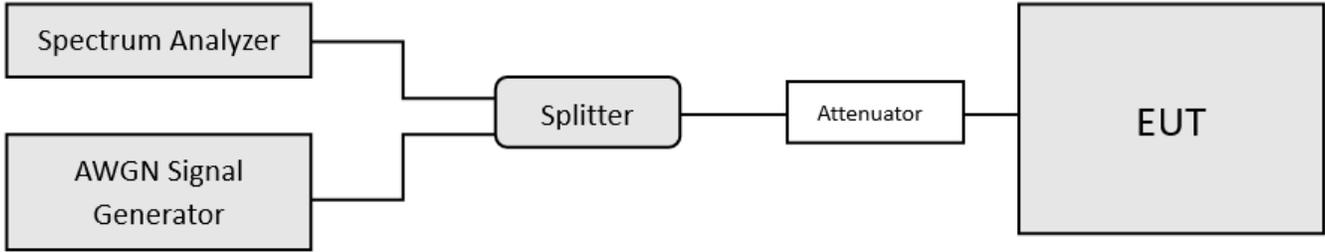


Figure 7-5. Contention-based protocol test setup, conducted method

Test Notes

1. Per guidance from KDB 987594 D02 v01r01, contention based protocol was tested using an AWGN signal with a bandwidth of 10MHz (see Plot 7-349). The amplitude of the signal was increased until detected by the EUT, signaled by the ceasing of transmission (see Plot 7-365), marker indicates the point at which the AWGN signal is introduced.
2. 15 trials were ran in order to assure that at least 90% of certainty was met.
3. Per Guidance from KDB 987594 D04 v01, contention based protocol was tested with receiver with the lowest antenna gain.
4. All CBP Timing Plots shown are for the ceased condition. Some spikes that may be shown are from adjacent portions of the spectrum that are still transmitting.

$$\text{Detection Level} = \text{Injected AWGN Power (dBm)} - \text{Antenna Gain (dBi)} + \text{Path Loss (dB)}$$

Equation 7-1. Detection Level Calculation

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	Injected (AWGN) [dBm]	Antenna Gain [dBi]	Adjusted Power Level [dBm]	Detection Limit [dBm]	Margin [dB]
UNII Band 5	53	6215	20	6215	-73.30	-3.42	-69.88	-62.0	-7.88
				6110	-73.50	-3.42	-70.08	-62.0	-8.08
	47	6185	160	6185	-73.20	-3.42	-69.78	-62.0	-7.78
				6260	-72.20	-3.42	-68.78	-62.0	-6.78
UNII Band 6	101	6455	20	6455	-73.15	-10.50	-62.65	-62.0	-0.65
				6430	-73.10	-10.50	-62.60	-62.0	-0.60
	111	6505	160	6505	-73.20	-10.50	-62.70	-62.0	-0.70
				6580	-73.72	-10.50	-63.22	-62.0	-1.22
UNII Band 7	149	6695	20	6695	-74.10	-8.64	-65.46	-62.0	-3.46
				6750	-71.40	-8.64	-62.76	-62.0	-0.76
	175	6825	160	6825	-74.27	-8.64	-65.63	-62.0	-3.63
				6900	-74.45	-8.64	-65.81	-62.0	-3.81
UNII Band 8	197	6935	20	6935	-75.30	-11.46	-63.84	-62.0	-1.84
				6910	-74.96	-11.46	-63.50	-62.0	-1.50
	207	6985	160	6985	-76.37	-11.46	-64.91	-62.0	-2.91
				7060	-73.90	-11.46	-62.44	-62.0	-0.44

Table 7-31. Contention Based Protocol – Incumbent Detection Results

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 256 of 302

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	EUT Transmission Status		
					Adjusted AWGN Power (dBm)		
					Normal	Minimal	Ceased
UNII Band 5	53	6215	20	6215	-81.88	-72.88	-69.88
	47	6185	160	6110	-82.08	-73.08	-70.08
				6185	-81.78	-72.78	-69.78
				6260	-80.78	-71.78	-68.78
UNII Band 6	101	6455	20	6455	-74.65	-65.65	-62.65
	111	6505	160	6430	-74.60	-65.60	-62.60
				6505	-74.70	-65.70	-62.70
				6580	-75.22	-66.22	-63.22
UNII Band 7	149	6695	20	6695	-77.46	-68.46	-65.46
	175	6825	160	6750	-74.76	-65.76	-62.76
				6825	-77.63	-68.63	-65.63
				6900	-77.81	-68.81	-65.81
UNII Band 8	197	6935	20	6935	-75.84	-66.84	-63.84
	207	6985	160	6910	-75.50	-66.50	-63.50
				6985	-76.91	-67.91	-64.91
				7060	-74.44	-65.44	-62.44


Table 7-32. Contention Based Protocol – Detection Results – All Tx Cases

Band	Channel	Channel Freq [MHz]	Channel BW [MHz]	Incumbent Freq [MHz]	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	Detection Rate (%)	
UNII Band 5	53	6215	20	6215	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
	47	6185	160	6110	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6185	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6260	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 6	101	6455	20	6455	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
	111	6505	160	6430	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6505	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
				6580	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 7	149	6695	20	6695	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
	175	6825	160	6750	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6825	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6900	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
UNII Band 8	197	6935	20	6935	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100	
	207	6985	160	6910	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				6985	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	100
				7060	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Table 7-33. Contention Based Protocol – Incumbent Detection Trial Results


FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 257 of 302

AWGN Plots

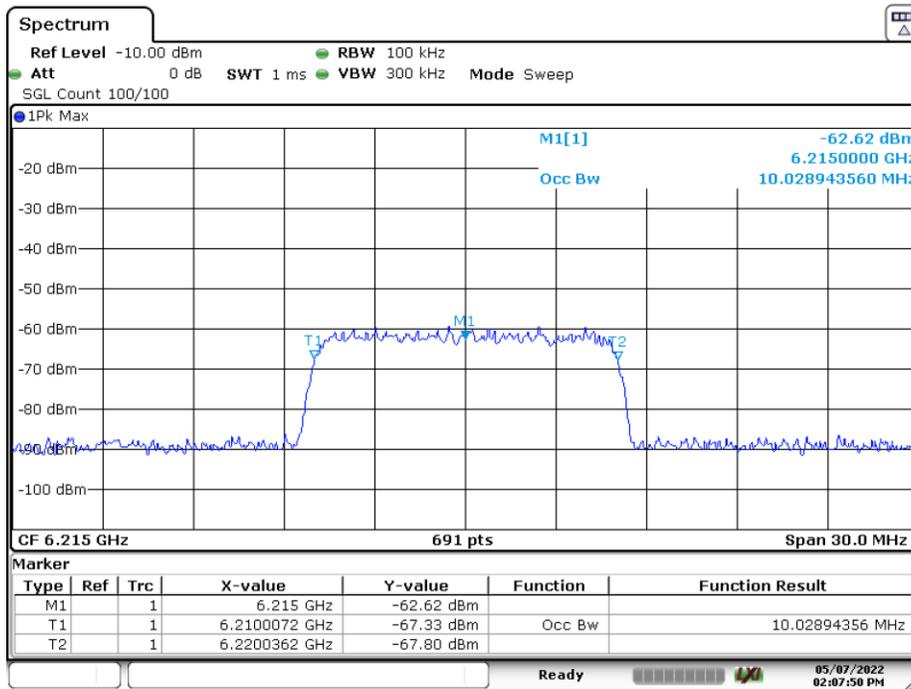

Date: 7.MAY.2022 14:07:50


Plot 7-443. AWGN Signal – UNII 5 – 20MHz

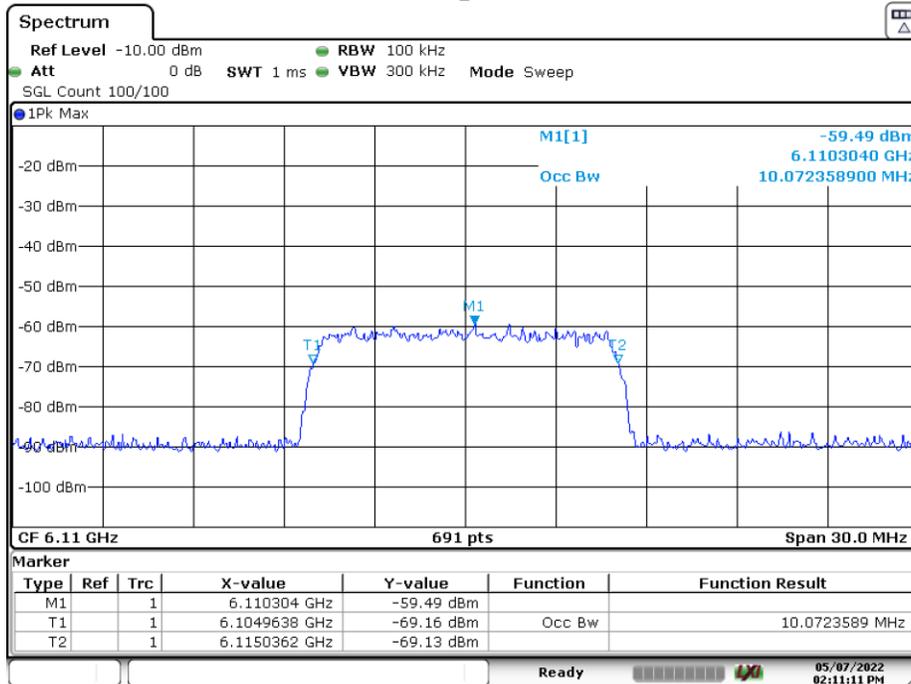

Date: 7.MAY.2022 14:11:11


Plot 7-444. AWGN Signal – UNII 5 – 160MHz - Low

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 258 of 302

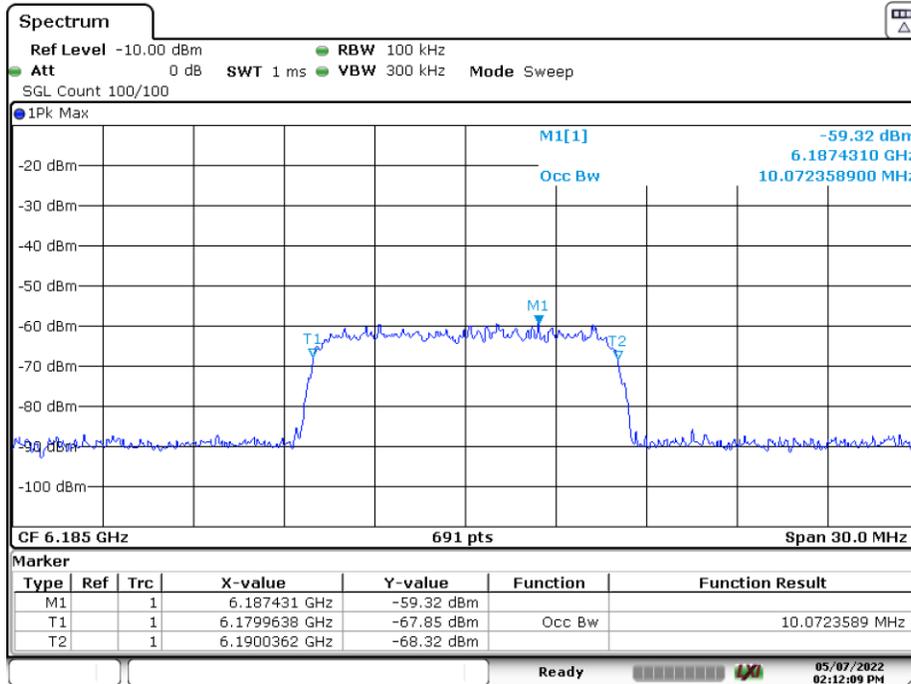

Date: 7.MAY.2022 14:12:09


Plot 7-445. AWGN Signal – UNII 5 – 160MHz - Mid

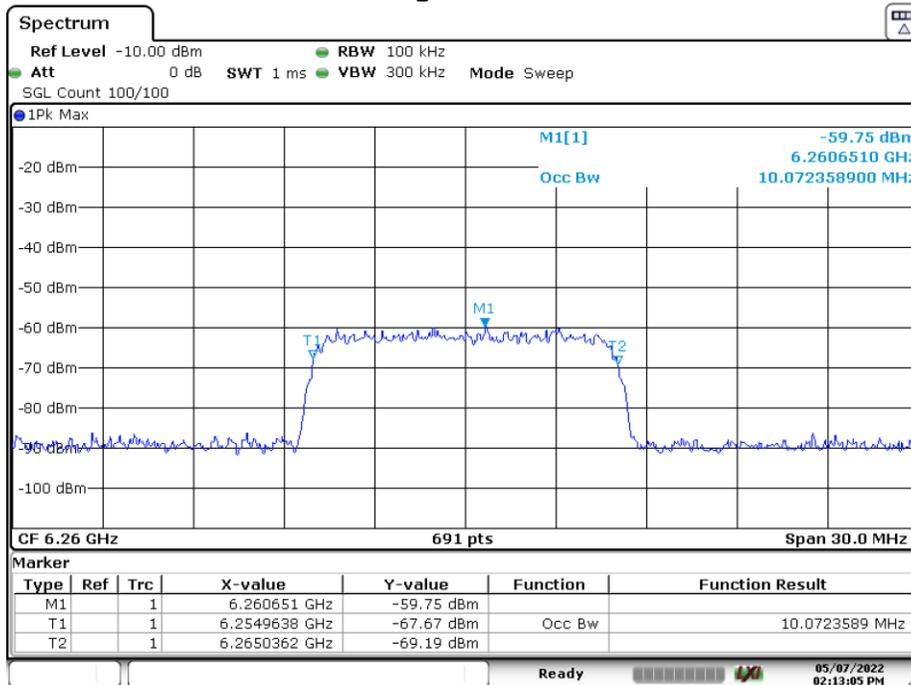

Date: 7.MAY.2022 14:13:05


Plot 7-446. AWGN Signal – UNII 5 – 160MHz - High

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 259 of 302

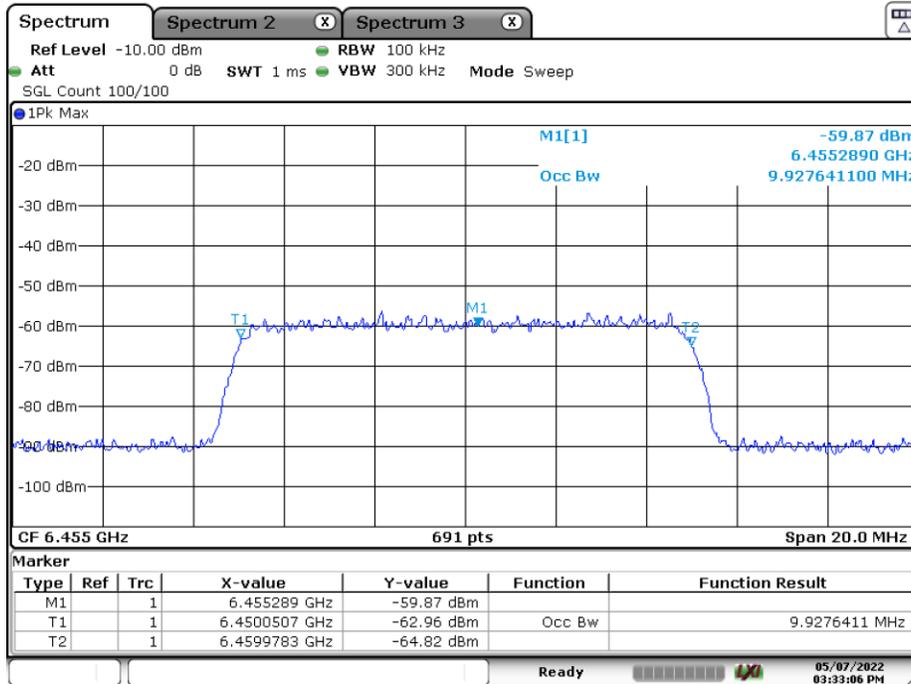

Date: 7.MAY.2022 15:33:06


Plot 7-447. AWGN Signal – UNII 6 – 20MHz

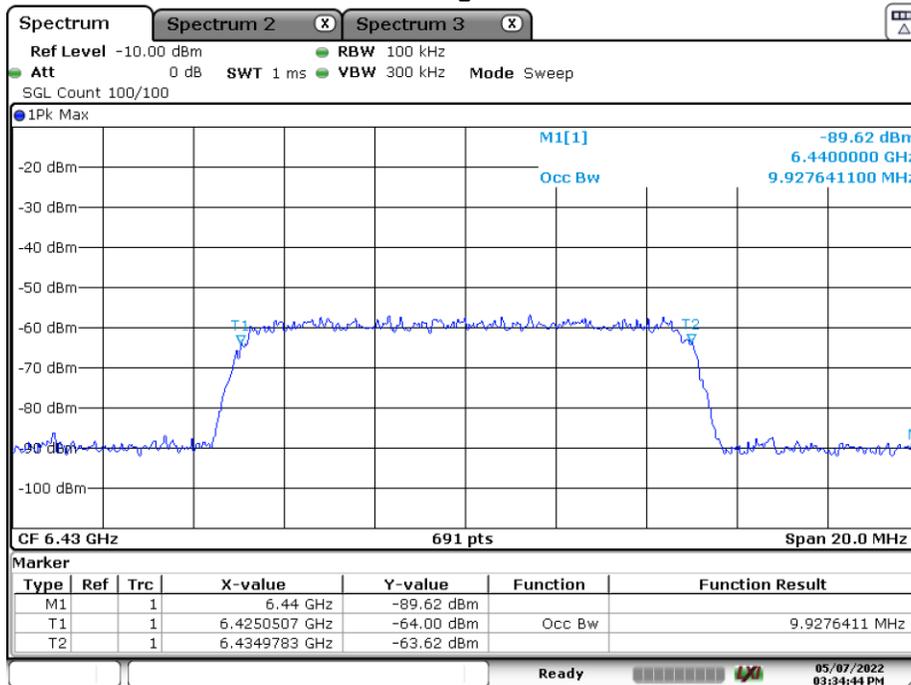

Date: 7.MAY.2022 15:34:43


Plot 7-448. AWGN Signal – UNII 6 – 160MHz - Low

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 260 of 302

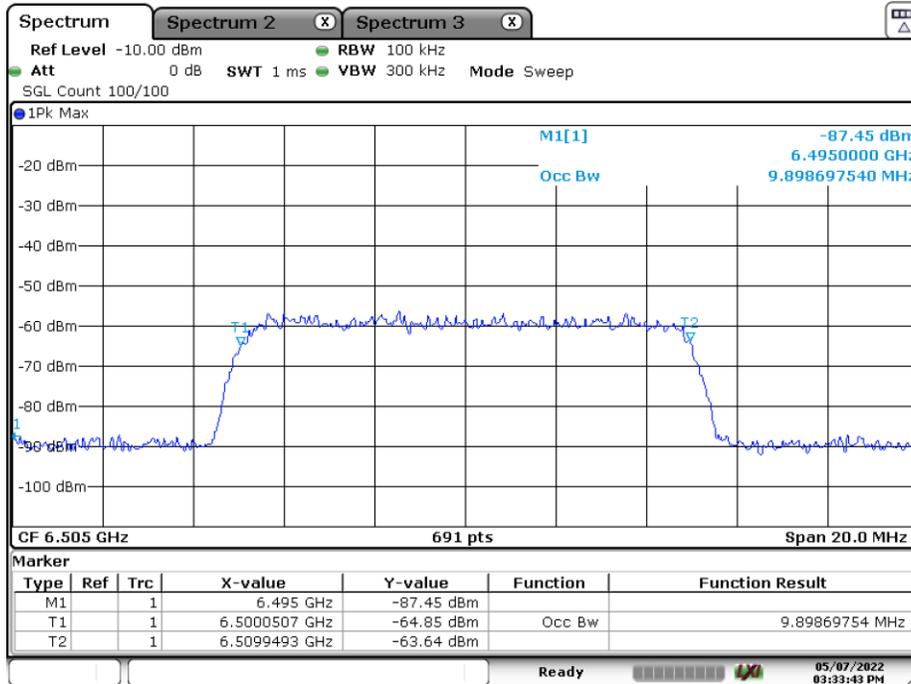

Date: 7.MAY.2022 15:33:43


Plot 7-449. AWGN Signal – UNII 6 – 160MHz - Mid

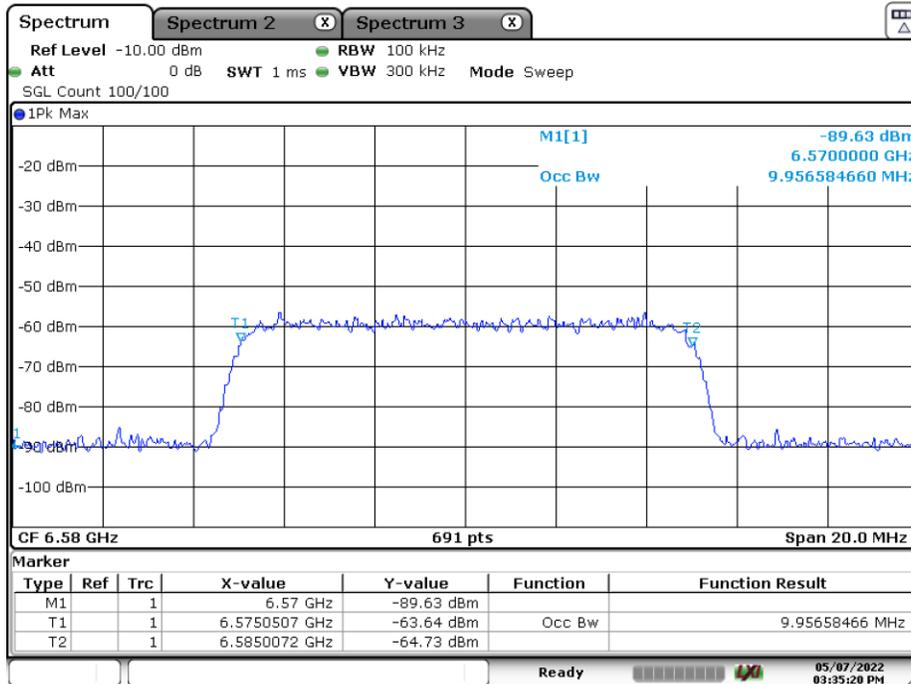

Date: 7.MAY.2022 15:35:20


Plot 7-450. AWGN Signal – UNII 6 – 160MHz - High

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 261 of 302

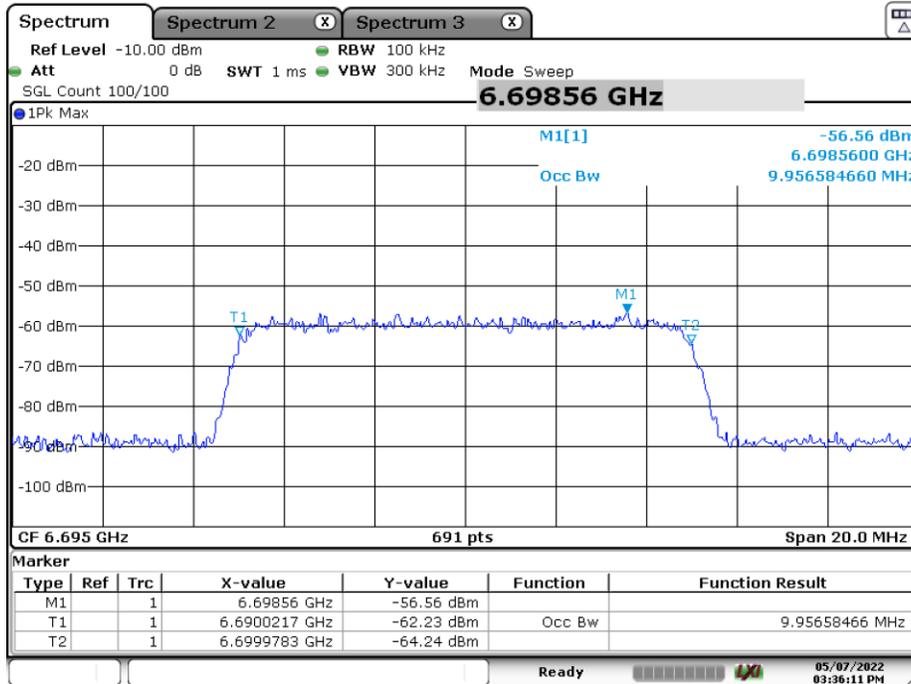

Date: 7.MAY.2022 15:36:11


Plot 7-451. AWGN Signal – UNII 7 – 20MHz

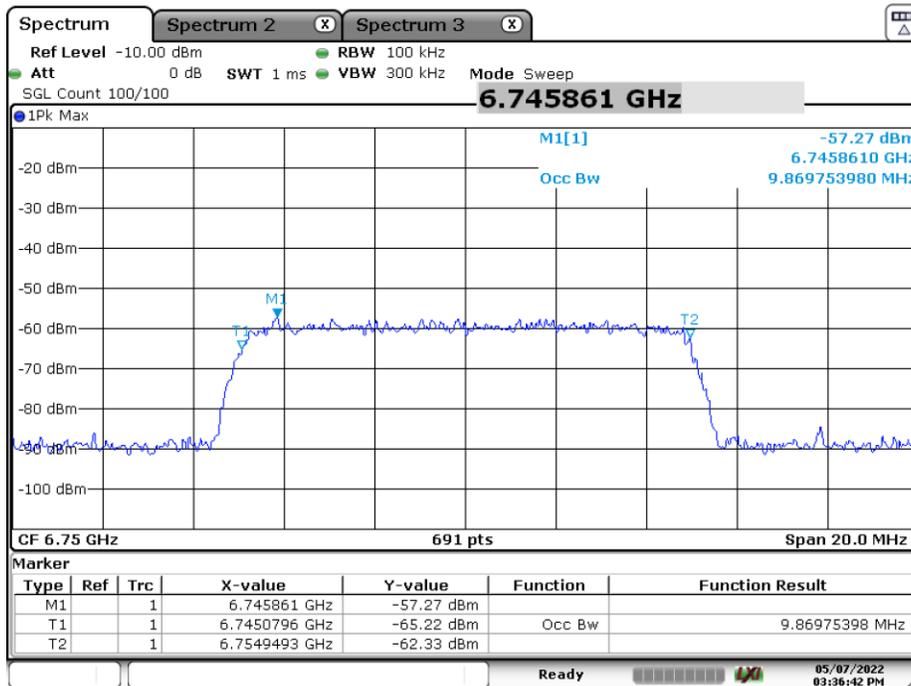

Date: 7.MAY.2022 15:36:42


Plot 7-452. AWGN Signal – UNII 7 – 160MHz - Low

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 262 of 302

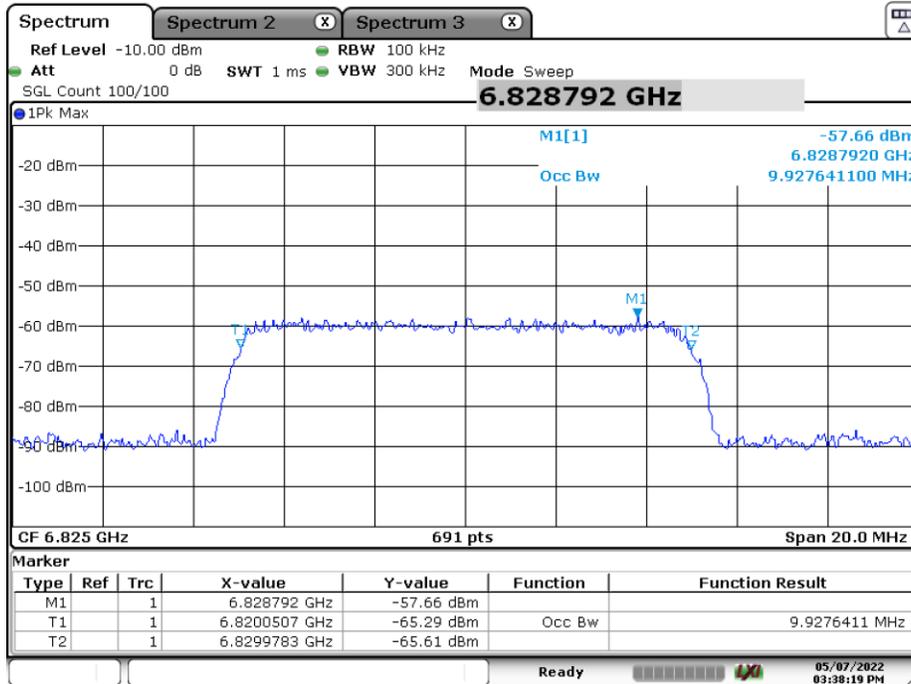

Date: 7.MAY.2022 15:38:18


Plot 7-453. AWGN Signal – UNII 7 – 160MHz - Mid

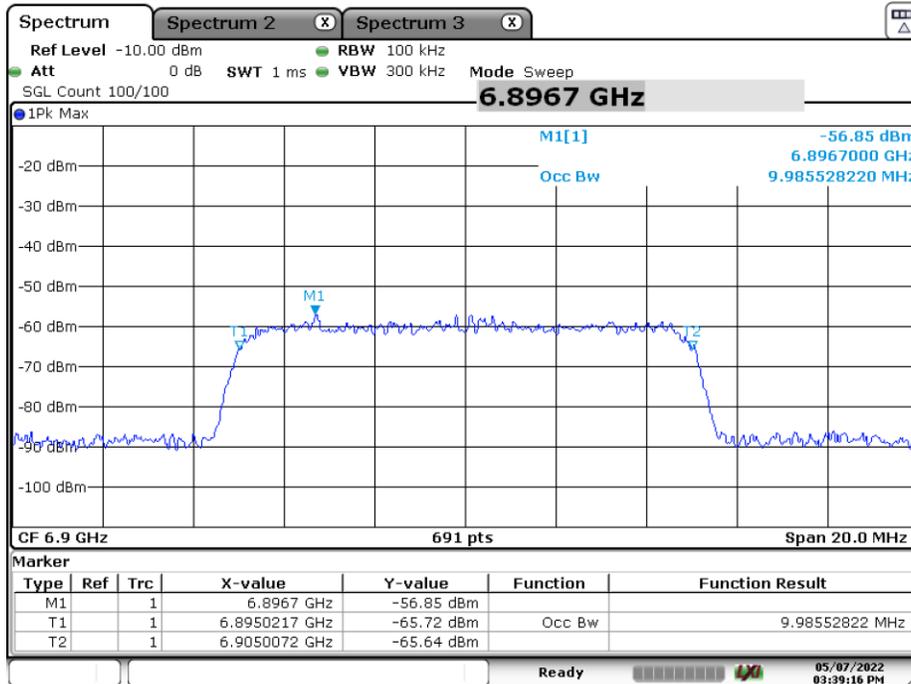

Date: 7.MAY.2022 15:39:16


Plot 7-454. AWGN Signal – UNII 7 – 160MHz - High

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 263 of 302

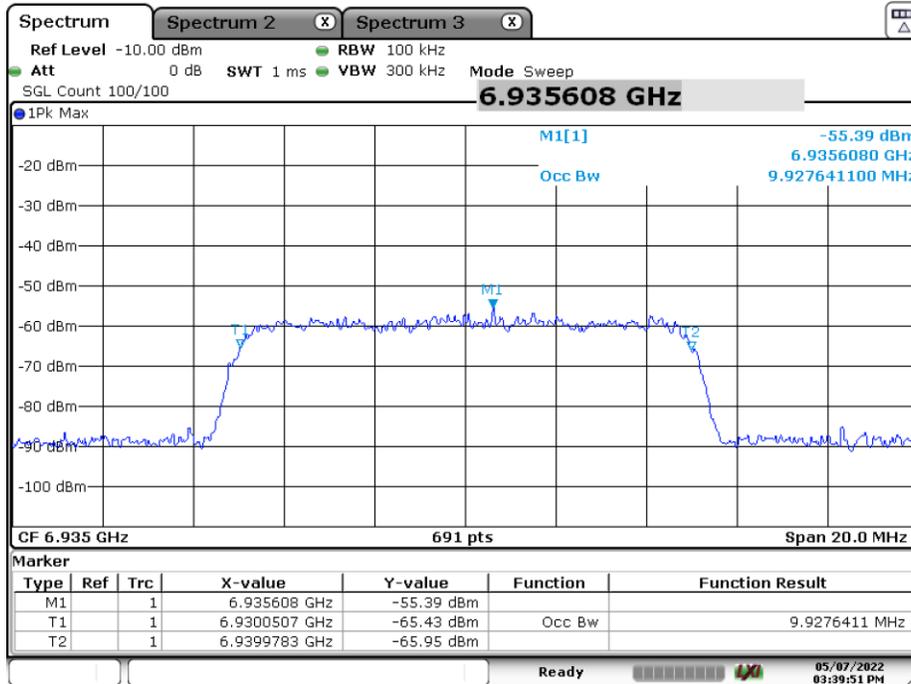

Date: 7.MAY.2022 15:39:51


Plot 7-455. AWGN Signal – UNII 8 – 20MHz

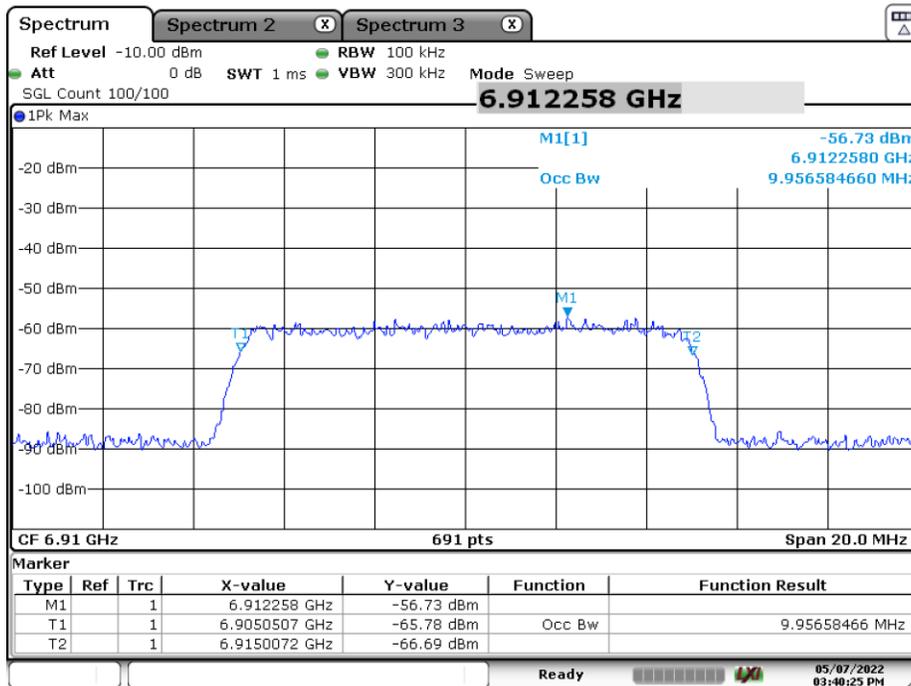

Date: 7.MAY.2022 15:40:24


Plot 7-456. AWGN Signal – UNII 8 – 160MHz - Low

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 264 of 302

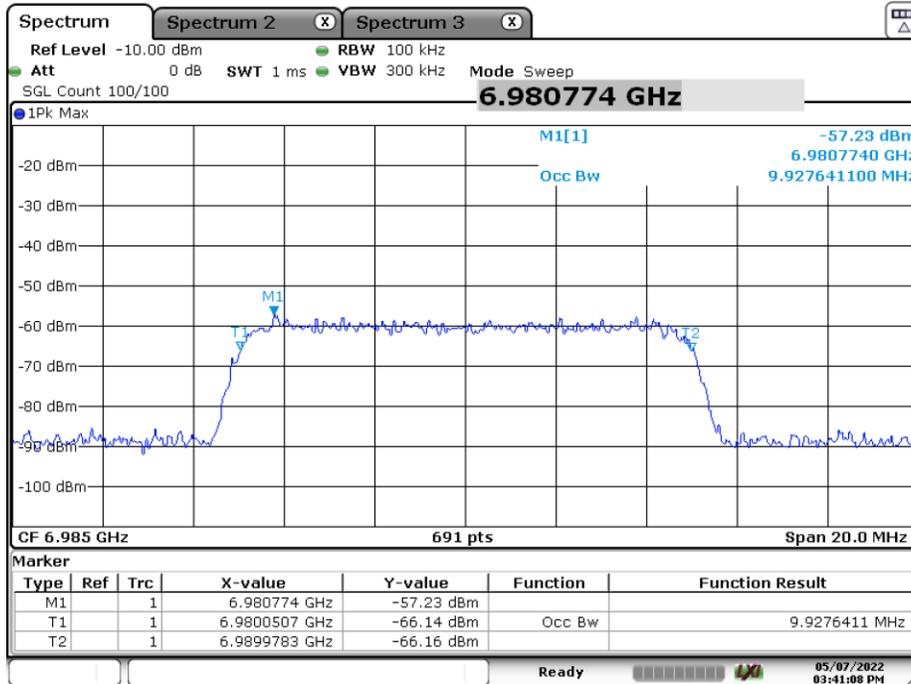

Date: 7.MAY.2022 15:41:07

Plot 7-457. AWGN Signal – UNII 8 – 160MHz - Mid

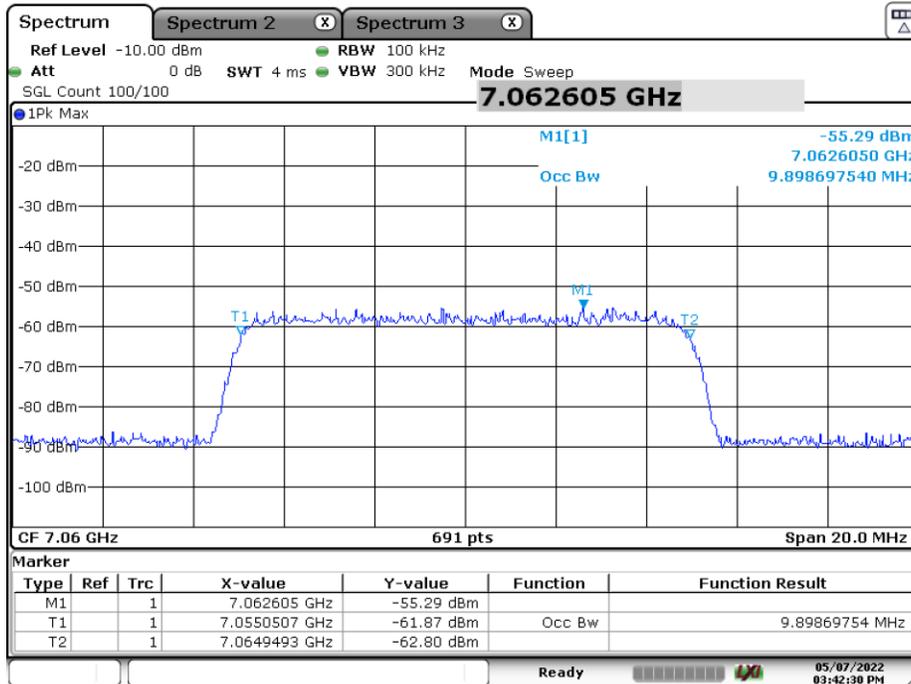


Date: 7.MAY.2022 15:42:30

Plot 7-458. AWGN Signal – UNII 8 – 160MHz - High


FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 265 of 302

CBP Timing Plots

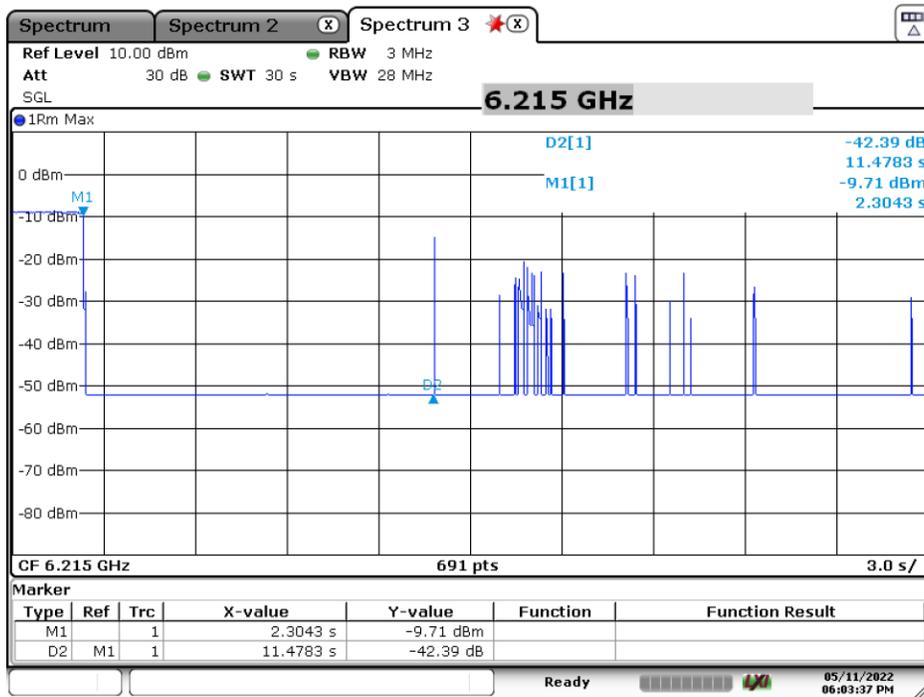

Date: 11.MAY.2022 18:03:37


Plot 7-459. Contention Based Protocol Timing Plot – UNII 5 – 20MHz Ch53

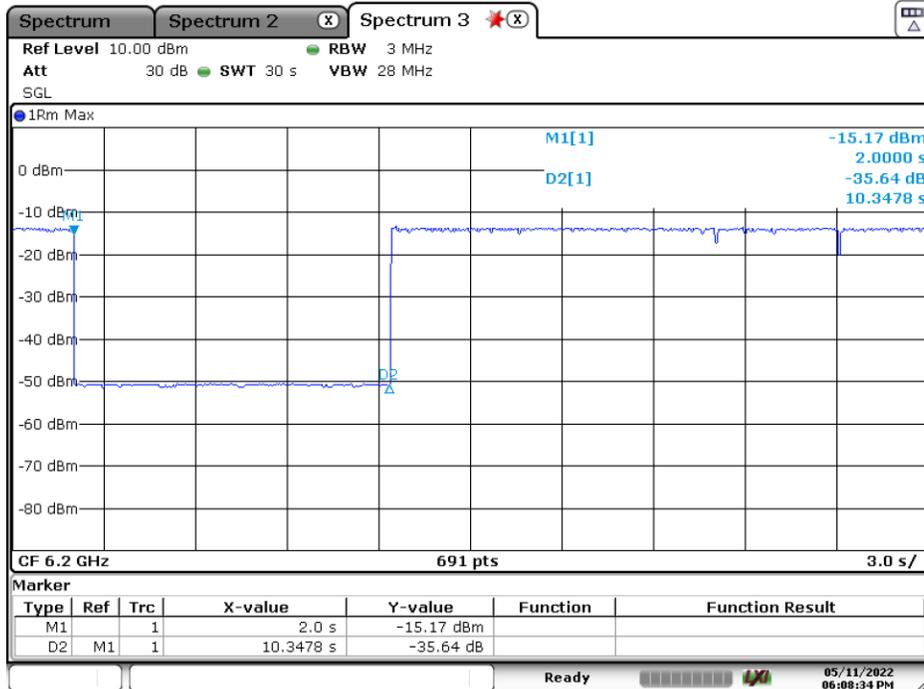

Date: 11.MAY.2022 18:08:34


Plot 7-460. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Ch47 – Low

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 266 of 302

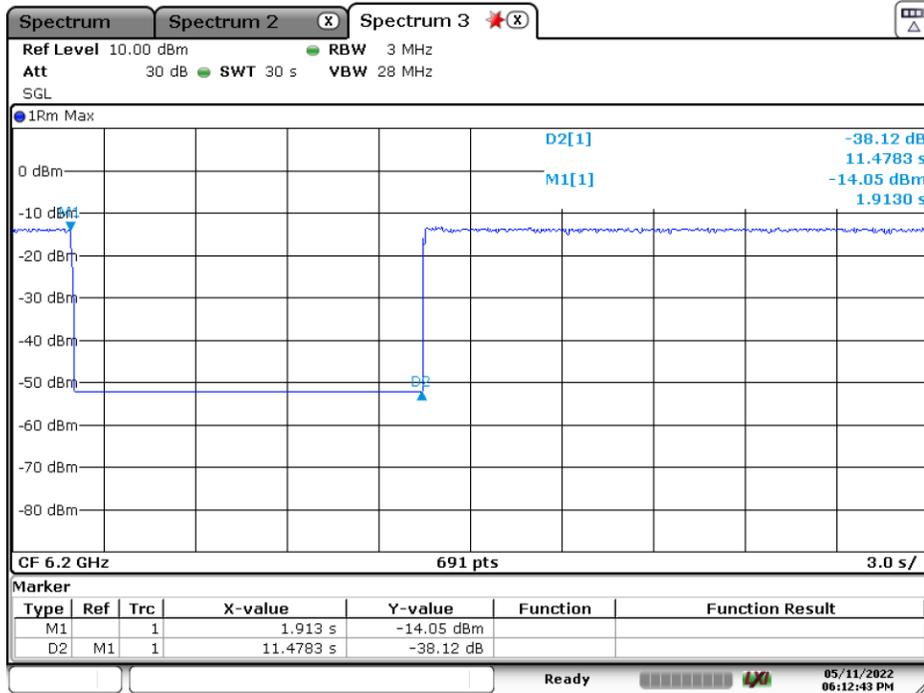

Date: 11.MAY.2022 18:12:43


Plot 7-461. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Ch47 – Mid

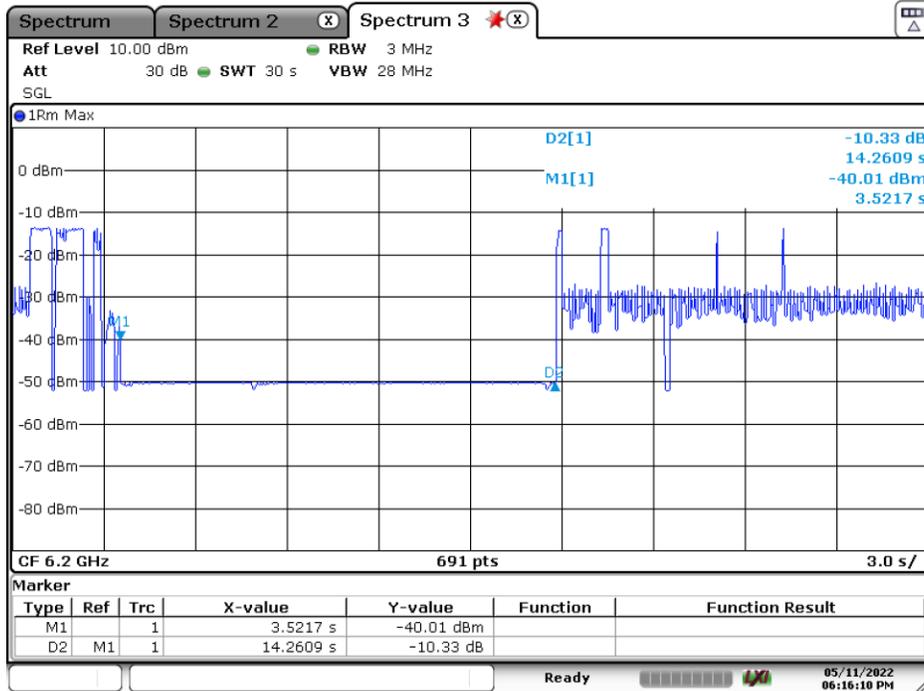

Date: 11.MAY.2022 18:16:10


Plot 7-462. Contention Based Protocol Timing Plot – UNII 5 – 160MHz Ch47 - High

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 267 of 302

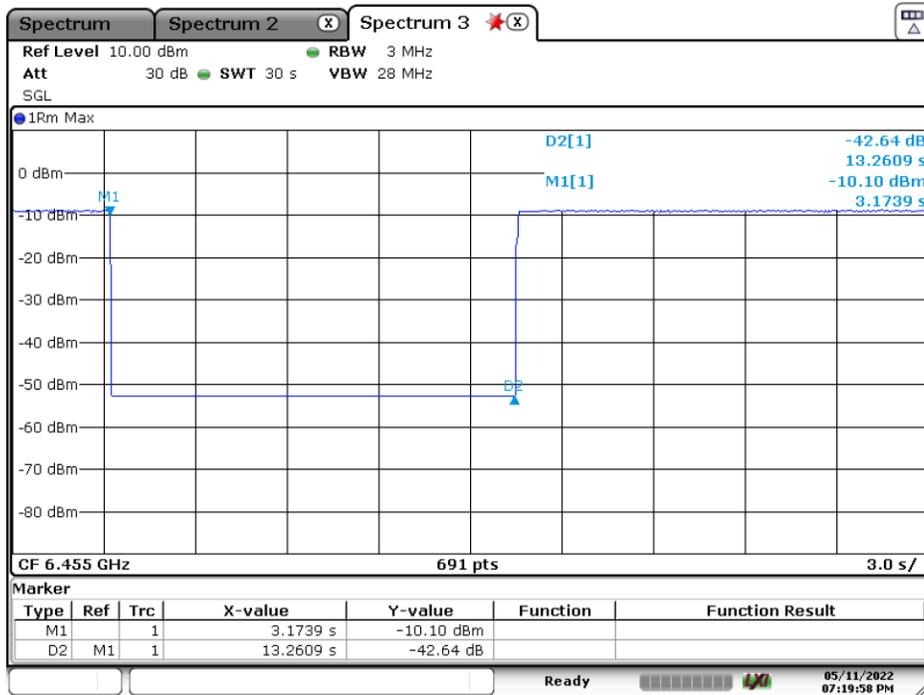

Date: 11.MAY.2022 19:19:58


Plot 7-463. Contention Based Protocol Timing Plot – UNII 6 – 20MHz Ch101

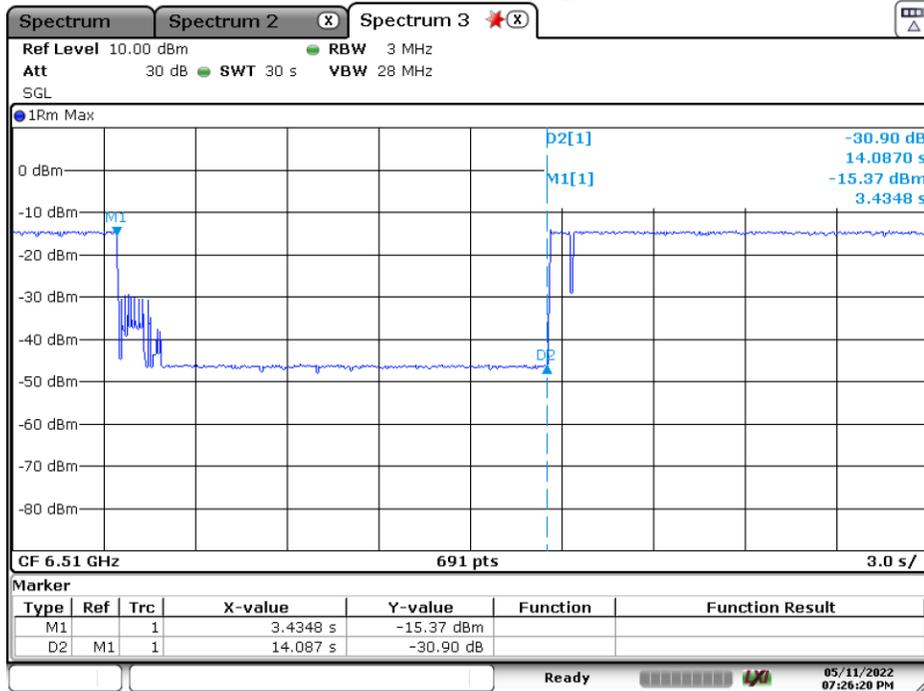

Date: 11.MAY.2022 19:26:20


Plot 7-464. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Ch111 – Low

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 268 of 302

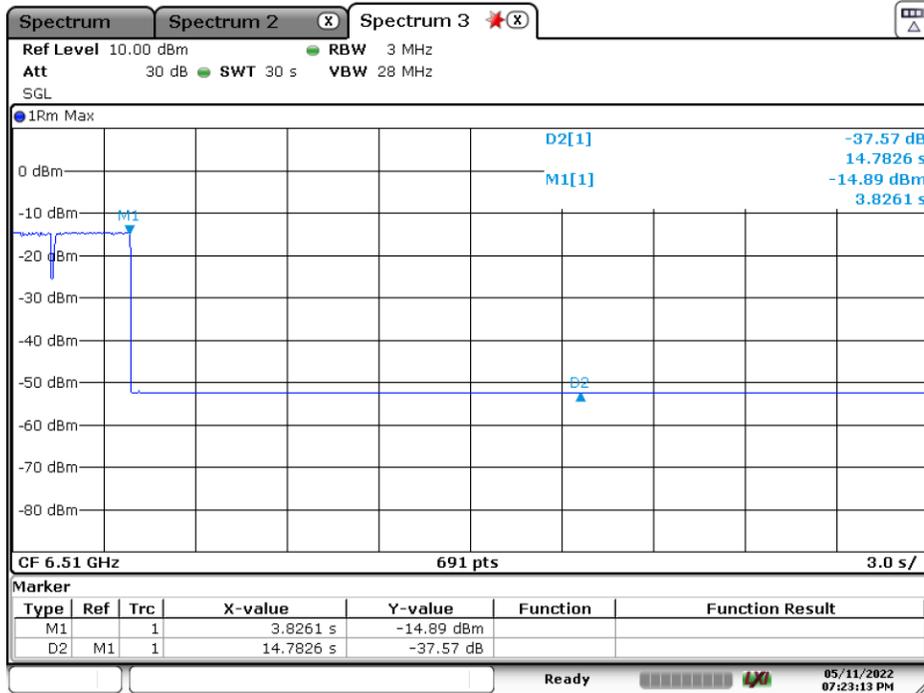

Date: 11.MAY.2022 19:23:13


Plot 7-465. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Ch111 – Mid

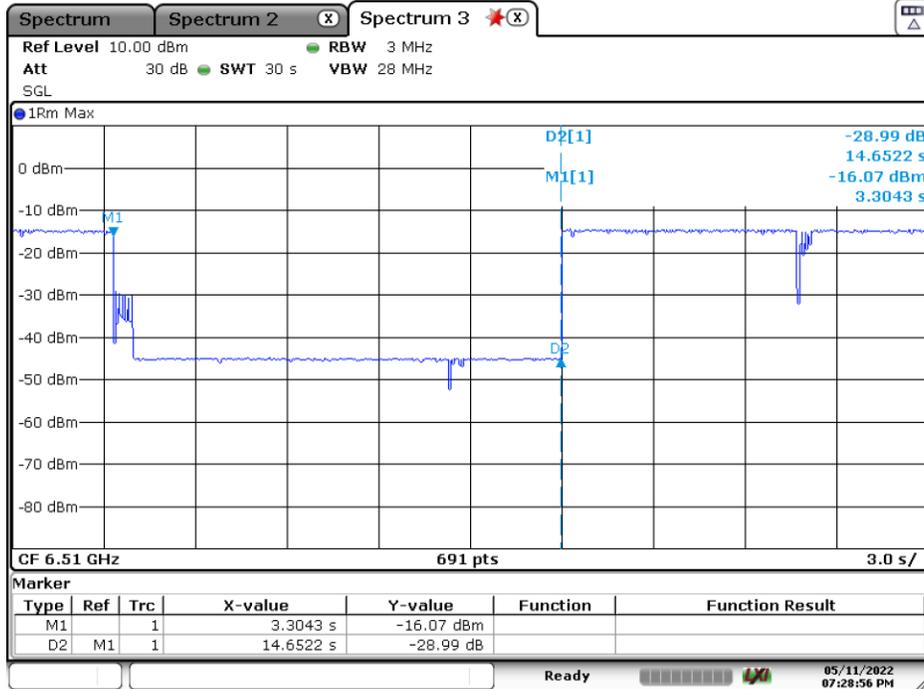

Date: 11.MAY.2022 19:28:56


Plot 7-466. Contention Based Protocol Timing Plot – UNII 6 – 160MHz Ch111 - High

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 269 of 302

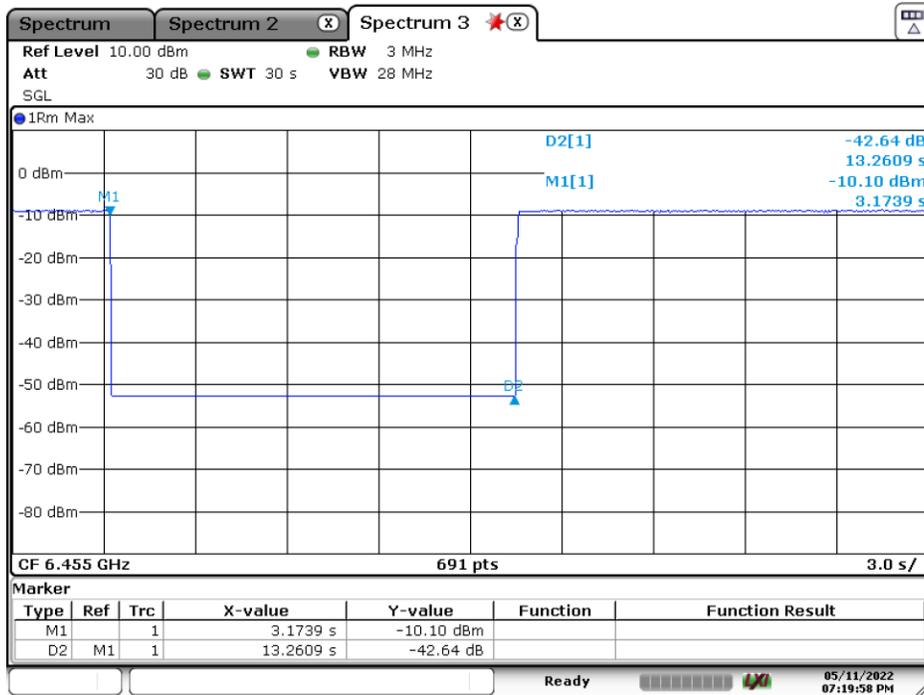

Date: 11.MAY.2022 19:19:58


Plot 7-467. Contention Based Protocol Timing Plot – UNII 7 – 20MHz Ch149

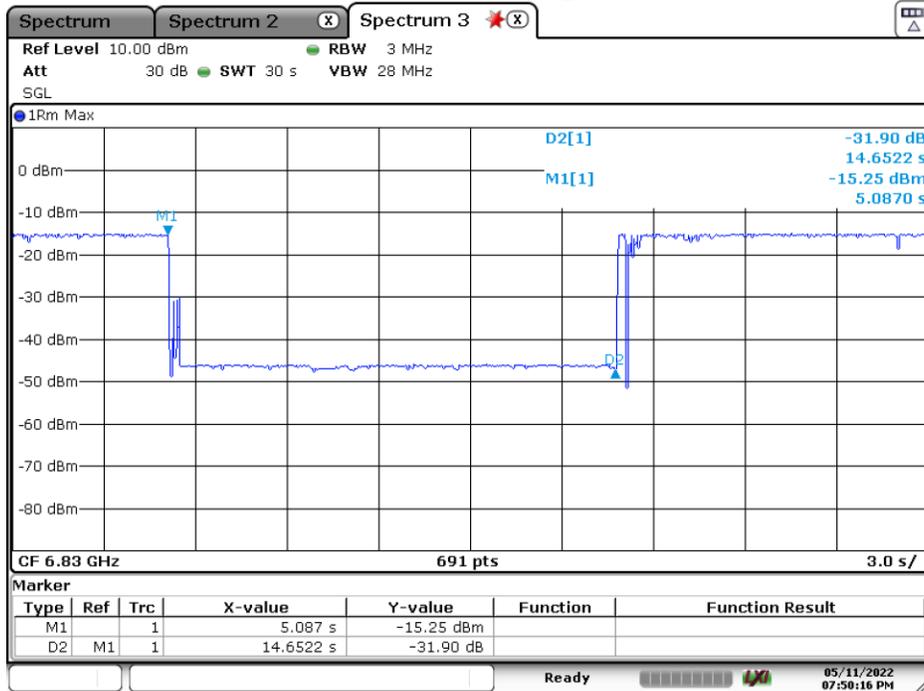

Date: 11.MAY.2022 19:50:16


Plot 7-468. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 – Low

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 270 of 302

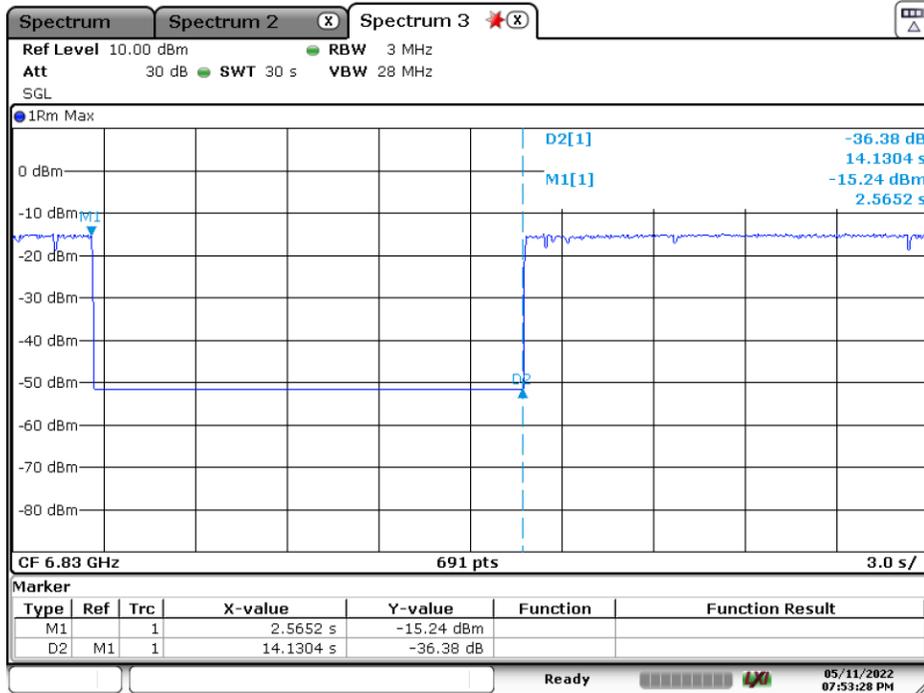

Date: 11.MAY.2022 19:53:28


Plot 7-469. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 – Mid

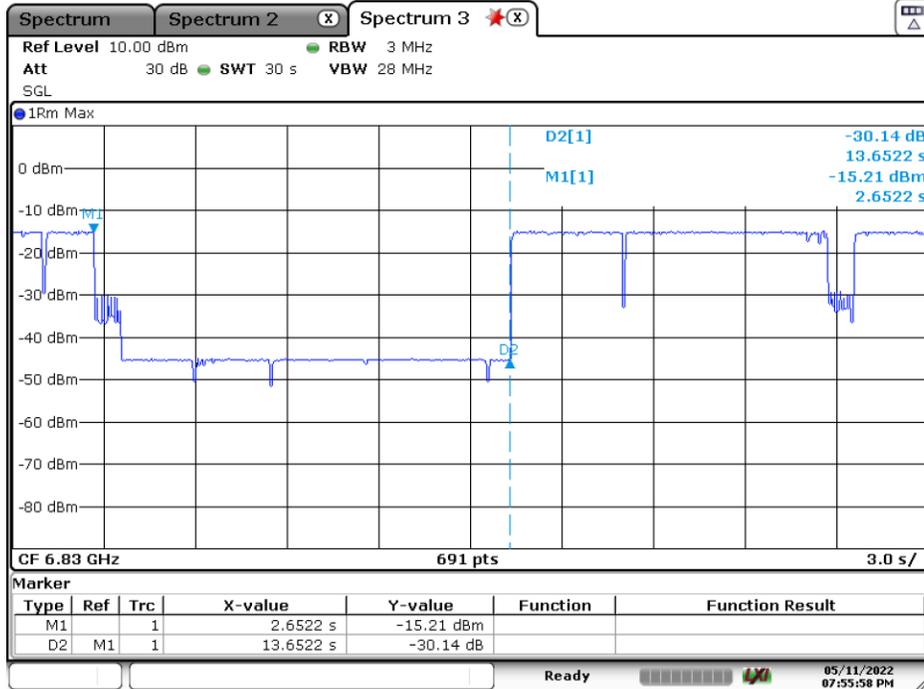

Date: 11.MAY.2022 19:55:58


Plot 7-470. Contention Based Protocol Timing Plot – UNII 7 – 160MHz Ch175 - High

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 271 of 302

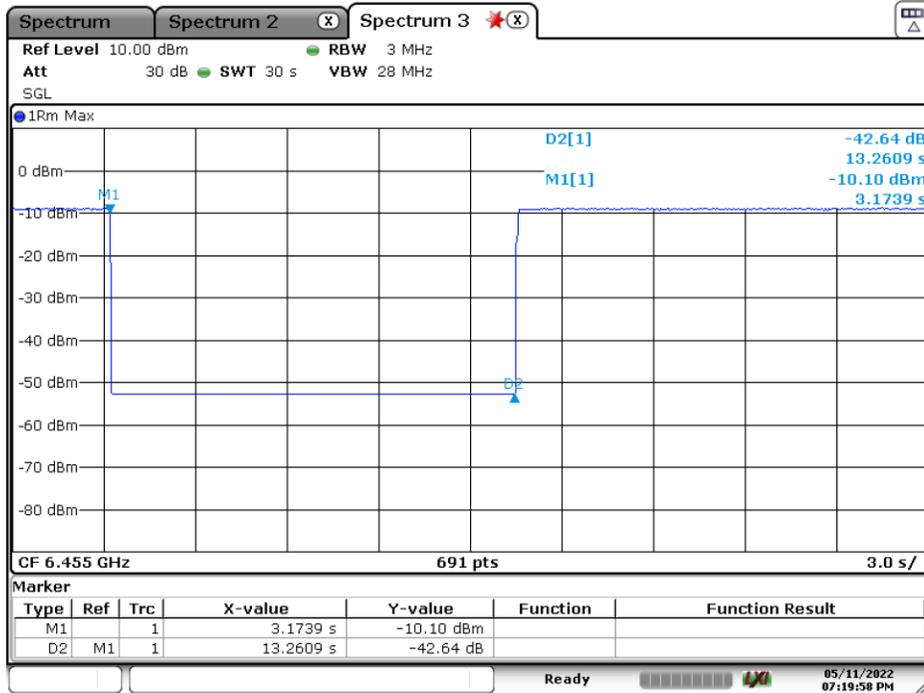

Date: 11.MAY.2022 19:19:58


Plot 7-471. Contention Based Protocol Timing Plot – UNII 8 – 20MHz Ch197

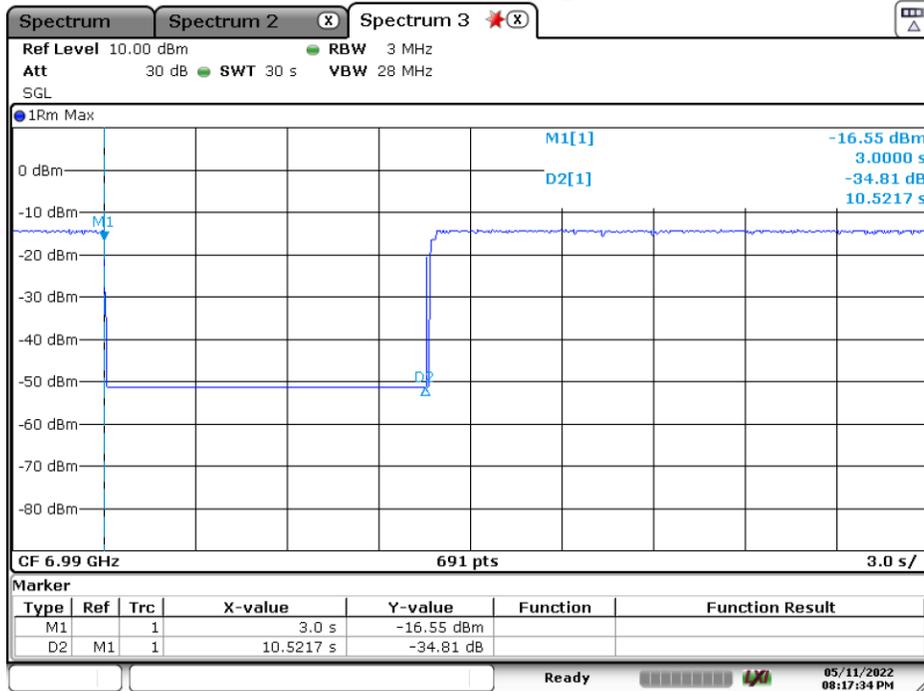

Date: 11.MAY.2022 20:17:34


Plot 7-472. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 – Low

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 272 of 302

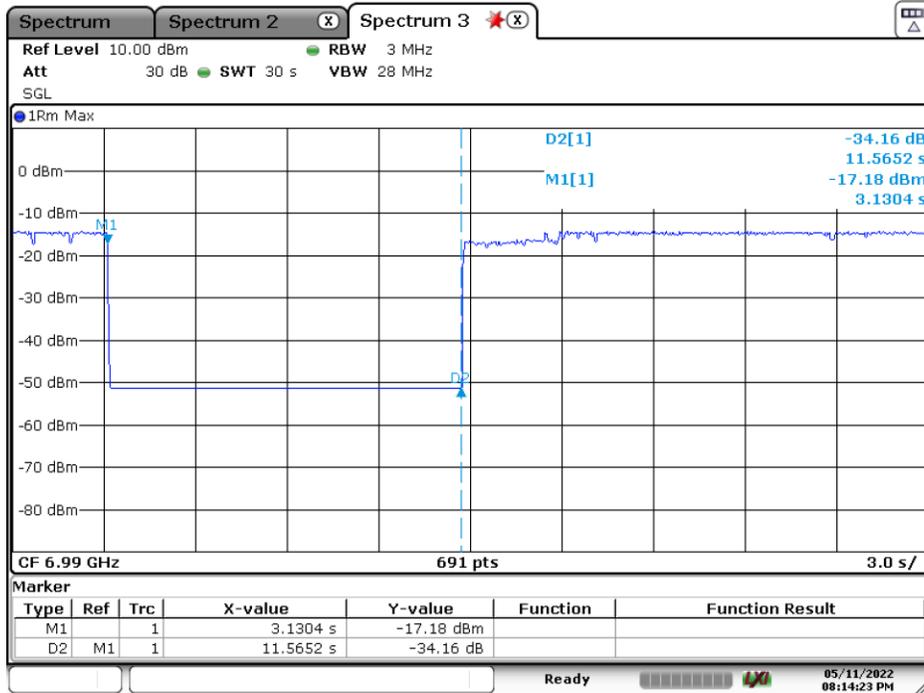

Date: 11.MAY.2022 20:14:23

Plot 7-473. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 – Mid

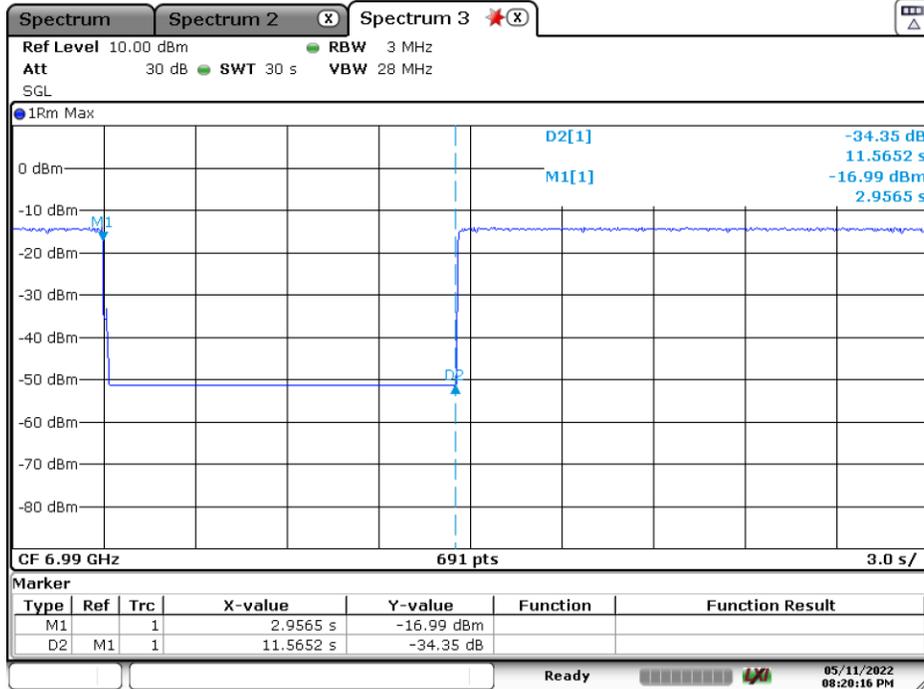

Date: 11.MAY.2022 20:20:16

Plot 7-474. Contention Based Protocol Timing Plot – UNII 8 – 160MHz Ch207 - High

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 273 of 302

7.7 Radiated Spurious Emission Measurements – Above 1GHz

§15.205, §15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. 802.11ax (20/40/80/160MHz)), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an e.i.r.p. of -27 dBm/MHz

Emissions found in a restricted band are subject to the limits of 15.209 as shown in the table below.

Frequency	Field Strength [$\mu\text{V}/\text{m}$]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-34. Radiated Limits

Test Procedures Used

ANSI C63.10-2013 – Sections 12.7.7.2, 12.7.6, 12.7.5
KDB 789033 D02 v02r01 – Section G

Test Settings

Average Measurements above 1GHz (Method AD)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span}/\text{RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 274 of 302

Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = 120kHz
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

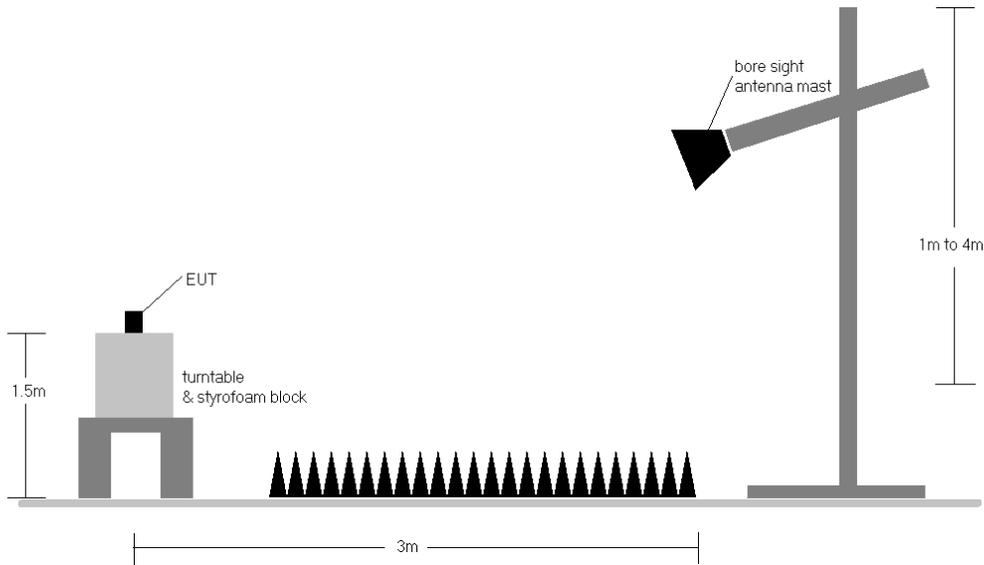


Figure 7-6. Test Instrument & Measurement Setup

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 275 of 302

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 are below the limit shown in Table 7-34.
2. All spurious emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-34. All spurious emissions that do not lie in a restricted band are subject to an average limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dB μ V/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dB μ V/m.
3. All spurious emissions that do not lie in a restricted band are subject to a peak limit not to exceed 20dB of the average limit [68.2dB μ V/m]. If a peak measurement passes the average limit it was determined no further investigation is necessary.
4. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
5. This unit was tested with its standard battery.
6. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. Radiated spurious emissions were investigated while operating in MIMO mode, however, it was determined that single antenna operation produced the worst case emissions. Since the emissions produced from MIMO operation were found to be more than 20dB below the limit, the MIMO emissions are not reported.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
10. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level [dB μ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable Loss [dB]
- Margin [dB] = Field Strength Level [dB μ V/m] – Limit [dB μ V/m]


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 276 of 302

7.7.1 MIMO Radiated Spurious Emission Measurements (106 Tones)

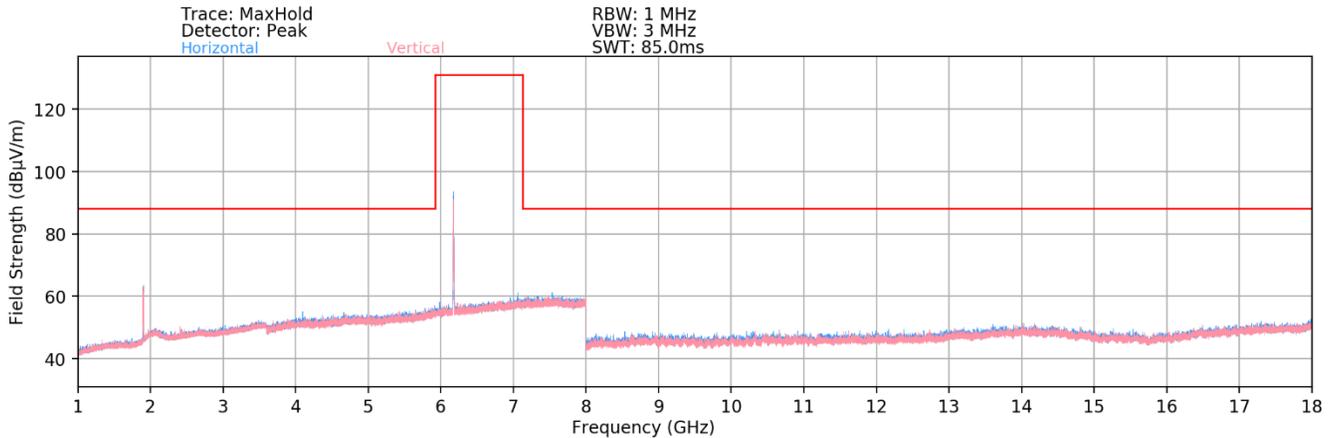

Plot 7-475. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII Band 5 – 20MHz – Ch.45)

Worst Case Mode: 802.11ax
Worst Case Transfer Rate: MCS0
RU Index: 54
Distance of Measurements: 1 & 3 Meters
Operating Frequency: 5935MHz
Channel: 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11870.00	Average	V	-	-	-80.47	13.93	0.00	40.46	53.98	-13.52
* 11870.00	Peak	V	-	-	-66.39	13.93	0.00	54.54	73.98	-19.44
* 17805.00	Average	V	-	-	-82.11	18.26	0.00	43.15	53.98	-10.83
* 17805.00	Peak	V	-	-	-65.39	18.26	0.00	59.87	73.98	-14.11
* 23740.00	Average	V	-	-	-67.54	3.99	-9.54	33.91	53.98	-20.07
* 23740.00	Peak	V	-	-	-58.01	3.99	-9.54	43.44	73.98	-30.54
29675.00	Peak	V	-	-	-58.03	6.33	-9.54	45.76	68.20	-22.44

Table 7-35. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 277 of 302

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-81.30	13.85	0.00	39.55	53.98	-14.43
* 12350.00	Peak	V	-	-	-67.65	13.85	0.00	53.20	73.98	-20.78
* 18525.00	Average	V	-	-	-63.42	1.93	-9.54	35.97	53.98	-18.01
* 18525.00	Peak	V	-	-	-56.11	1.93	-9.54	43.28	73.98	-30.70
24700.00	Peak	V	-	-	-56.64	4.39	-9.54	45.21	68.20	-22.99
30875.00	Peak	V	-	-	-58.01	6.89	-9.54	46.34	68.20	-21.86


Table 7-36. Radiated Measurements MIMO (106 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
12830.00	Peak	V	-	-	-66.59	14.78	0.00	55.19	68.20	-13.01
* 19245.00	Average	V	-	-	-65.11	2.30	-9.54	34.65	53.98	-19.33
* 19245.00	Peak	V	-	-	-56.69	2.30	-9.54	43.07	73.98	-30.91
25660.00	Peak	V	-	-	-56.91	4.61	-9.54	45.16	68.20	-23.04
32075.00	Peak	V	-	-	-57.22	7.18	-9.54	47.42	68.20	-20.78

Table 7-37. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 278 of 302

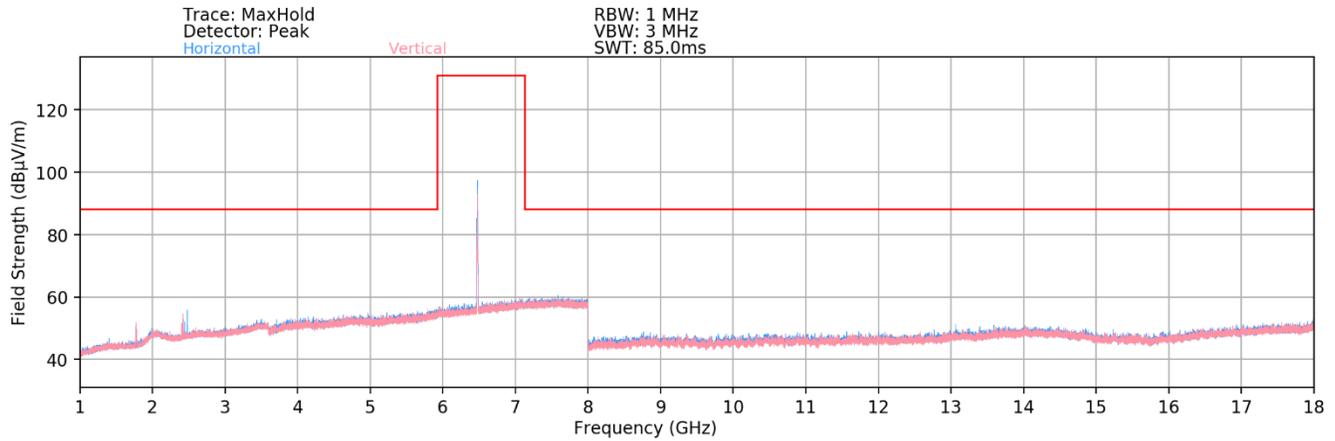

Plot 7-476. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 6 – 20MHz – Ch.105)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12870.00	Peak	V	-	-	-67.56	14.51	0.00	53.95	68.20	-14.25
* 19305.00	Average	V	-	-	-64.21	2.61	-9.54	35.86	53.98	-18.12
* 19305.00	Peak	V	-	-	-64.03	2.61	-9.54	36.04	73.98	-37.94
25740.00	Peak	V	-	-	-56.88	4.71	-9.54	45.29	68.20	-22.91
32175.00	Peak	V	-	-	-58.22	7.21	-9.54	46.45	68.20	-21.75

Table 7-38. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 279 of 302

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	V	-	-	-67.04	14.59	0.00	54.55	68.20	-13.65
* 19425.00	Average	V	-	-	-64.21	2.67	-9.54	35.92	53.98	-18.06
* 19425.00	Peak	V	-	-	-57.11	2.67	-9.54	43.02	73.98	-30.96
25900.00	Peak	V	-	-	-57.01	4.77	-9.54	45.22	68.20	-22.98
32375.00	Peak	V	-	-	-58.22	6.96	-9.54	46.20	68.20	-22.00


Table 7-39. Radiated Measurements MIMO (106 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13030.00	Peak	V	-	-	-67.66	14.61	0.00	53.95	68.20	-14.25
* 19545.00	Average	V	-	-	-63.41	2.63	-9.54	36.68	53.98	-17.30
* 19545.00	Peak	V	-	-	-56.22	2.63	-9.54	43.87	73.98	-30.11
26060.00	Peak	V	-	-	-57.28	4.83	-9.54	45.01	68.20	-23.19
32575.00	Peak	V	-	-	-57.01	6.80	-9.54	47.25	68.20	-20.95

Table 7-40. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 280 of 302

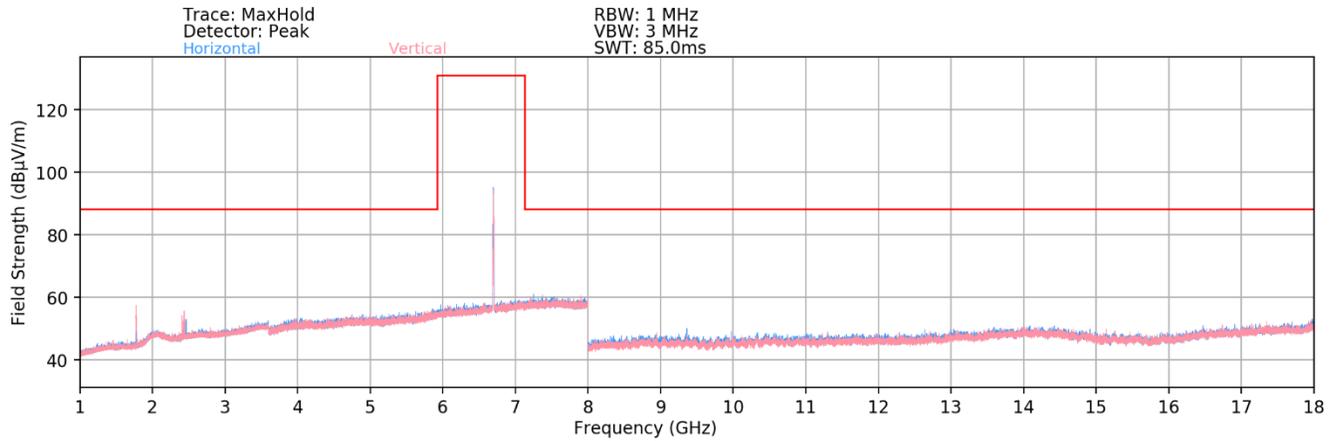

Plot 7 314. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 7 – 20MHz – Ch.149)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13070.00	Peak	V	-	-	-76.13	24.74	0.00	55.61	68.20	-12.59
* 19605.00	Average	V	-	-	-64.19	2.75	-9.54	36.02	53.98	-17.96
* 19605.00	Peak	V	-	-	-57.01	2.75	-9.54	43.20	73.98	-30.78
26140.00	Peak	V	-	-	-57.22	5.14	-9.54	45.38	68.20	-22.82
32675.00	Peak	V	-	-	-57.56	7.15	-9.54	47.05	68.20	-21.15

Table 7-41. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 281 of 302

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-87.45	25.62	0.00	45.17	53.98	-8.81
* 13390.00	Peak	V	-	-	-75.89	25.62	0.00	56.73	73.98	-17.25
* 20085.00	Average	V	-	-	-63.41	3.06	-9.54	37.11	53.98	-16.87
* 20085.00	Peak	V	-	-	-63.81	3.06	-9.54	36.71	73.98	-37.27
26780.00	Peak	V	-	-	-57.01	5.33	-9.54	45.78	68.20	-22.42
33475.00	Peak	V	-	-	-57.22	7.51	-9.54	47.75	68.20	-20.45


Table 7-42. Radiated Measurements MIMO (106 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	V	-	-	-75.99	26.03	0.00	57.04	68.20	-11.16
* 20625.00	Average	V	-	-	-65.01	3.32	-9.54	35.77	53.98	-18.21
* 20625.00	Peak	V	-	-	-56.44	3.32	-9.54	44.34	73.98	-29.64
27500.00	Peak	V	-	-	-57.32	4.97	-9.54	45.11	68.20	-23.09
34375.00	Peak	V	-	-	-58.01	7.82	-9.54	47.27	68.20	-20.93

Table 7-43. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 282 of 302

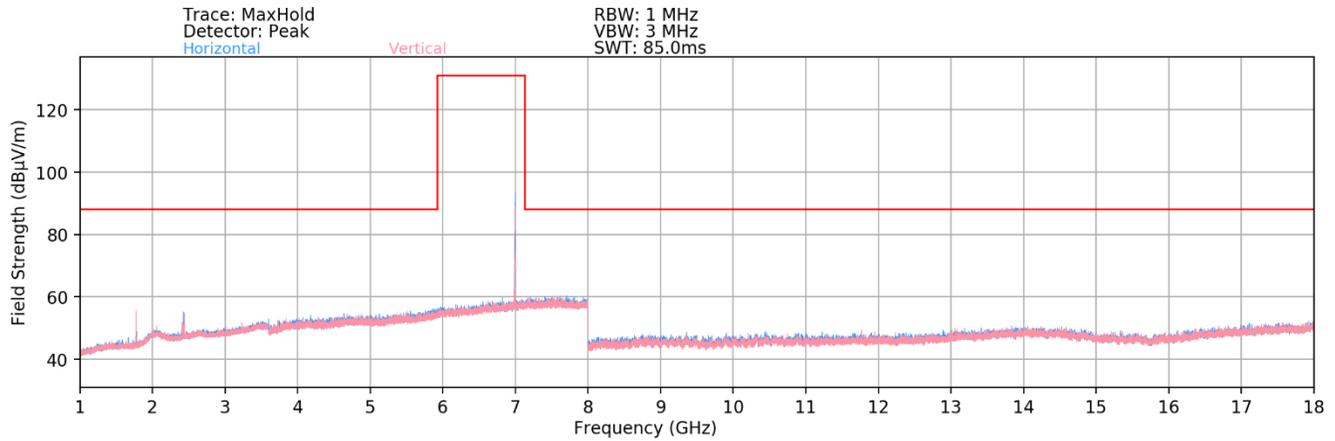

Plot 7 314. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 8 – 20MHz – Ch.209)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13790.00	Peak	V	-	-	-73.57	26.18	0.00	59.61	68.20	-8.59
* 20685.00	Average	V	-	-	-64.41	3.24	-9.54	36.29	53.98	-17.69
* 20685.00	Peak	V	-	-	-56.70	3.24	-9.54	44.00	73.98	-29.98
27580.00	Peak	V	-	-	-55.63	5.11	-9.54	46.94	68.20	-21.26
34475.00	Peak	V	-	-	-57.01	7.75	-9.54	48.20	68.20	-20.00

Table 7-44. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 283 of 302



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	V	-	-	-72.77	26.49	0.00	60.72	68.20	-7.48
* 20985.00	Average	V	-	-	-64.28	3.52	-9.54	36.70	53.98	-17.28
* 20985.00	Peak	V	-	-	-57.66	3.52	-9.54	43.32	73.98	-30.66
27980.00	Peak	V	-	-	-57.86	4.92	-9.54	44.52	68.20	-23.68
34975.00	Peak	V	-	-	-57.01	8.03	-9.54	48.48	68.20	-19.72


Table 7-45. Radiated Measurements MIMO (106 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 54
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
14230.00	Peak	V	-	-	-74.12	27.66	0.00	60.54	68.20	-7.66
* 21345.00	Average	V	-	-	-64.59	3.97	-9.54	36.84	53.98	-17.14
* 21345.00	Peak	V	-	-	-57.71	3.97	-9.54	43.72	73.98	-30.26
28460.00	Peak	V	-	-	-56.91	5.18	-9.54	45.73	68.20	-22.47
35575.00	Peak	V	-	-	-56.66	7.82	-9.54	48.62	68.20	-19.58

Table 7-46. Radiated Measurements MIMO (106 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 284 of 302

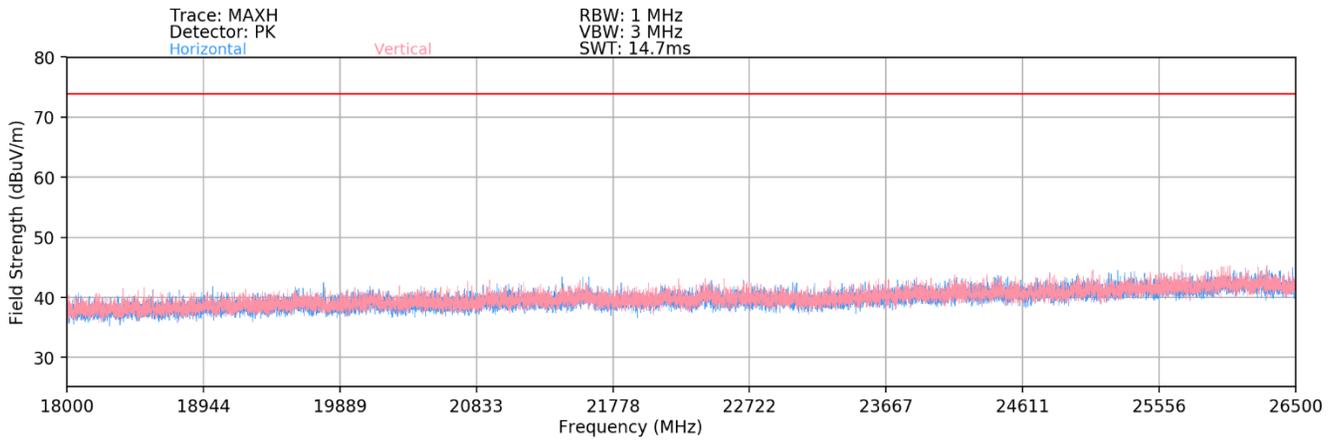


Plot 7-477. Radiated Spurious Plot above 18GHz - 26.5GHz MIMO (802.11ax)

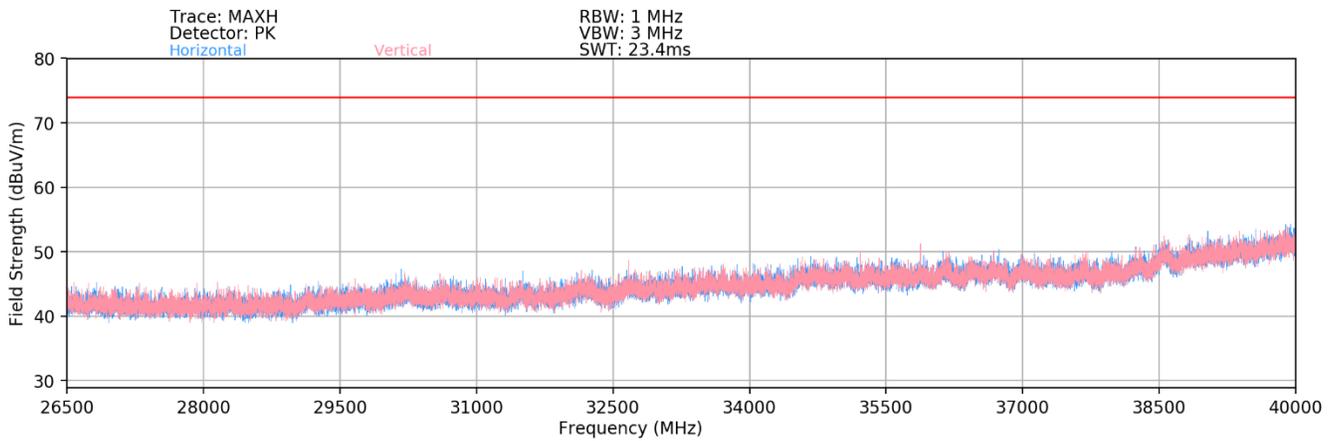

Plot 7-478. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 285 of 302

7.7.2 MIMO Radiated Spurious Emission Measurements (242 Tones)

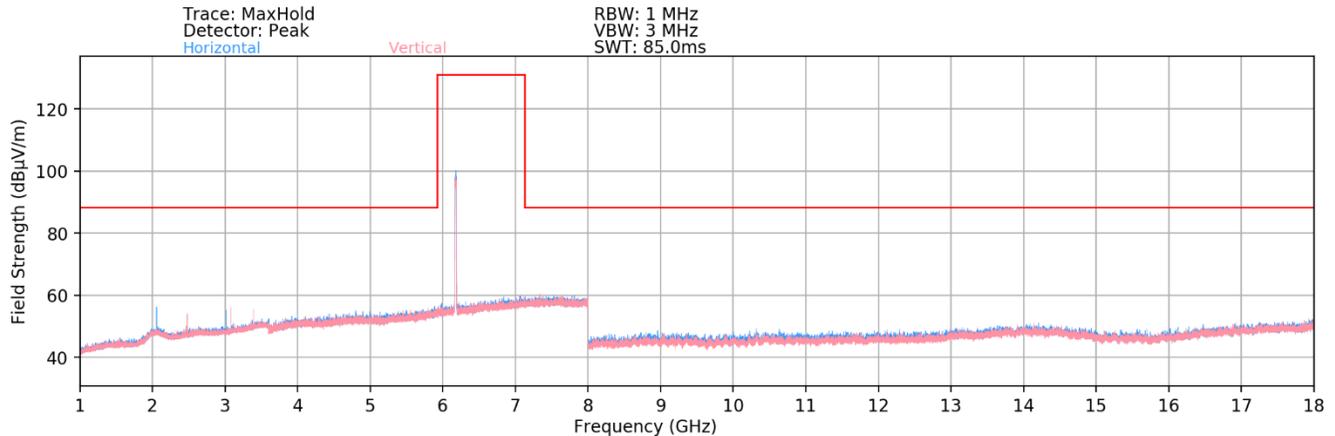

Plot 7-479. Radiated Spurious Plot above 1GHz MIMO (802.11ax – UNII Band 5 – 20MHz – Ch.45)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 5935MHz
 Channel: 2

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 11910.00	Average	V	-	-	-80.98	13.93	0.00	39.95	53.98	-14.03
* 11910.00	Peak	V	-	-	-69.53	13.93	0.00	51.40	73.98	-22.58
* 17865.00	Average	V	-	-	-83.51	18.26	0.00	41.75	53.98	-12.23
* 17865.00	Peak	V	-	-	-70.32	18.26	0.00	54.94	73.98	-19.04
* 23820.00	Average	V	-	-	-67.54	3.99	-9.54	33.91	53.98	-20.07
* 23820.00	Peak	V	-	-	-58.01	3.99	-9.54	43.44	73.98	-30.54
29775.00	Peak	V	-	-	-58.03	6.33	-9.54	45.76	68.20	-22.44

Table 7-47. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 286 of 302



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6175MHz
 Channel: 45

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 12350.00	Average	V	-	-	-81.40	13.85	0.00	39.45	53.98	-14.53
* 12350.00	Peak	V	-	-	-69.37	13.85	0.00	51.48	73.98	-22.50
* 18525.00	Average	V	-	-	-63.42	1.93	-9.54	35.97	53.98	-18.01
* 18525.00	Peak	V	-	-	-56.11	1.93	-9.54	43.28	73.98	-30.70
24700.00	Peak	V	-	-	-56.64	4.39	-9.54	45.21	68.20	-22.99
30875.00	Peak	V	-	-	-58.01	6.89	-9.54	46.34	68.20	-21.86


Table 7-48. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6415MHz
 Channel: 93

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12830.00	Peak	V	-	-	-69.08	14.78	0.00	52.70	68.20	-15.50
* 19245.00	Average	V	-	-	-65.11	2.30	-9.54	34.65	53.98	-19.33
* 19245.00	Peak	V	-	-	-56.69	2.30	-9.54	43.07	73.98	-30.91
25660.00	Peak	V	-	-	-56.91	4.61	-9.54	45.16	68.20	-23.04
32075.00	Peak	V	-	-	-57.22	7.18	-9.54	47.42	68.20	-20.78

Table 7-49. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 287 of 302

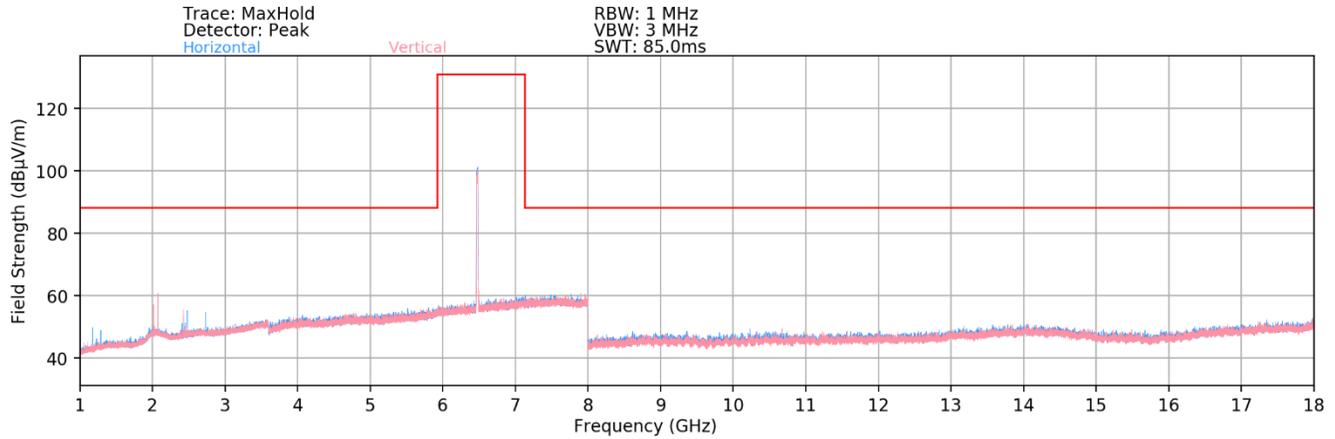

Plot 7-480. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 6 – 20MHz – Ch.105)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6435MHz
 Channel: 97

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12870.00	Peak	V	-	-	-68.36	14.51	0.00	53.15	68.20	-15.05
* 19305.00	Average	V	-	-	-64.21	2.61	-9.54	35.86	53.98	-18.12
* 19305.00	Peak	V	-	-	-64.03	2.61	-9.54	36.04	73.98	-37.94
25740.00	Peak	V	-	-	-56.88	4.71	-9.54	45.29	68.20	-22.91
32175.00	Peak	V	-	-	-58.22	7.21	-9.54	46.45	68.20	-21.75

Table 7-50. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 288 of 302



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6475MHz
 Channel: 105

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
12950.00	Peak	V	-	-	-69.01	14.59	0.00	52.58	68.20	-15.62
* 19425.00	Average	V	-	-	-64.21	2.67	-9.54	35.92	53.98	-18.06
* 19425.00	Peak	V	-	-	-57.11	2.67	-9.54	43.02	73.98	-30.96
25900.00	Peak	V	-	-	-57.01	4.77	-9.54	45.22	68.20	-22.98
32375.00	Peak	V	-	-	-58.22	6.96	-9.54	46.20	68.20	-22.00


Table 7-51. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6515MHz
 Channel: 113

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13030.00	Peak	V	-	-	-68.78	14.61	0.00	52.83	68.20	-15.37
* 19545.00	Average	V	-	-	-63.41	2.63	-9.54	36.68	53.98	-17.30
* 19545.00	Peak	V	-	-	-56.22	2.63	-9.54	43.87	73.98	-30.11
26060.00	Peak	V	-	-	-57.28	4.83	-9.54	45.01	68.20	-23.19
32575.00	Peak	V	-	-	-57.01	6.80	-9.54	47.25	68.20	-20.95

Table 7-52. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 289 of 302

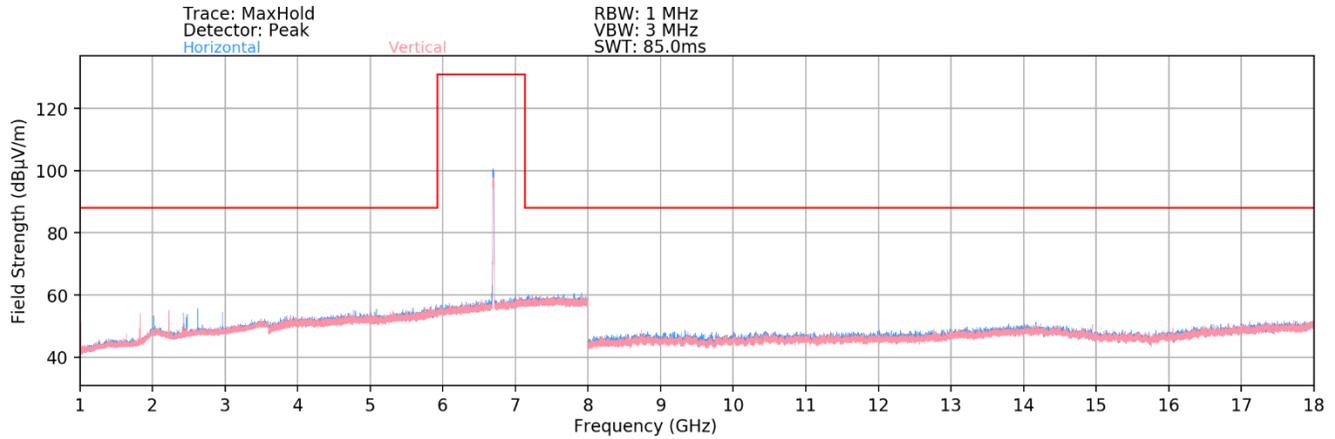

Plot 7 314. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 7 – 20MHz – Ch.149)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6535MHz
 Channel: 117

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13070.00	Peak	V	-	-	-75.99	24.74	0.00	55.75	68.20	-12.45
* 19605.00	Average	V	-	-	-64.19	2.75	-9.54	36.02	53.98	-17.96
* 19605.00	Peak	V	-	-	-57.01	2.75	-9.54	43.20	73.98	-30.78
26140.00	Peak	V	-	-	-57.22	5.14	-9.54	45.38	68.20	-22.82
32675.00	Peak	V	-	-	-57.56	7.15	-9.54	47.05	68.20	-21.15

Table 7-53. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 290 of 302



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6695MHz
 Channel: 149

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
* 13390.00	Average	V	-	-	-86.69	25.62	0.00	45.93	53.98	-8.05
* 13390.00	Peak	V	-	-	-76.38	25.62	0.00	56.24	73.98	-17.74
* 20085.00	Average	V	-	-	-63.41	3.06	-9.54	37.11	53.98	-16.87
* 20085.00	Peak	V	-	-	-63.81	3.06	-9.54	36.71	73.98	-37.27
26780.00	Peak	V	-	-	-57.01	5.33	-9.54	45.78	68.20	-22.42
33475.00	Peak	V	-	-	-57.22	7.51	-9.54	47.75	68.20	-20.45


Table 7-54. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6875MHz
 Channel: 185

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13750.00	Peak	V	-	-	-75.99	26.03	0.00	57.04	68.20	-11.16
* 20625.00	Average	V	-	-	-65.01	3.32	-9.54	35.77	53.98	-18.21
* 20625.00	Peak	V	-	-	-56.44	3.32	-9.54	44.34	73.98	-29.64
27500.00	Average	V	-	-	-57.32	4.97	-9.54	45.11	68.20	-23.09
34375.00	Peak	V	-	-	-58.01	7.82	-9.54	47.27	68.20	-20.93

Table 7-55. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 291 of 302

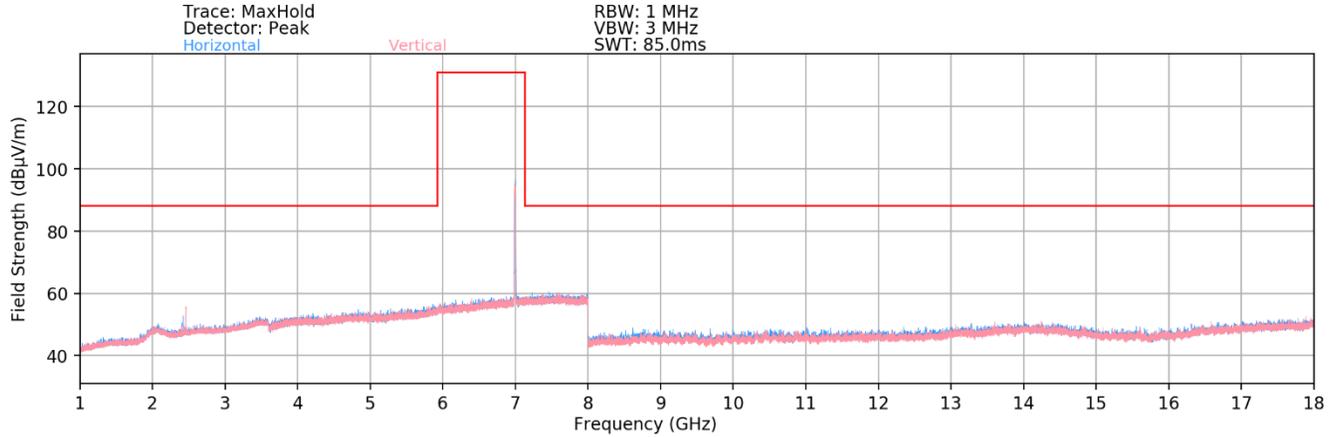

Plot 7 314. Radiated Spurious Plot above 1GHz MIMO (802.11ax– UNII Band 8 – 20MHz – Ch.209)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6895MHz
 Channel: 189

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
13790.00	Peak	V	-	-	-74.63	26.18	0.00	58.55	68.20	-9.65
* 20685.00	Average	V	-	-	-64.41	3.24	-9.54	36.29	53.98	-17.69
* 20685.00	Peak	V	-	-	-56.70	3.24	-9.54	44.00	73.98	-29.98
27580.00	Peak	V	-	-	-55.63	5.11	-9.54	46.94	68.20	-21.26
34475.00	Peak	V	-	-	-57.01	7.75	-9.54	48.20	68.20	-20.00

Table 7-56. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 292 of 302



Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 6995MHz
 Channel: 209

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
13990.00	Peak	V	-	-	-73.01	26.49	0.00	60.48	68.20	-7.72
* 20985.00	Average	V	-	-	-64.28	3.52	-9.54	36.70	53.98	-17.28
* 20985.00	Peak	V	-	-	-57.66	3.52	-9.54	43.32	73.98	-30.66
27980.00	Peak	V	-	-	-57.86	4.92	-9.54	44.52	68.20	-23.68
34975.00	Peak	V	-	-	-57.01	8.03	-9.54	48.48	68.20	-19.72


Table 7-57. Radiated Measurements MIMO (242 Tones)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 61
 Distance of Measurements: 1 & 3 Meters
 Operating Frequency: 7115MHz
 Channel: 233


Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dBμV/m]	Limit [dBμV/m]	Margin [dB]
* 14230.00	Peak	V	-	-	-72.86	27.66	0.00	61.80	68.20	-6.40
* 21345.00	Average	V	-	-	-64.59	3.97	-9.54	36.84	53.98	-17.14
21345.00	Peak	V	-	-	-57.71	3.97	-9.54	43.72	73.98	-30.26
28460.00	Peak	V	-	-	-56.91	5.18	-9.54	45.73	68.20	-22.47
35575.00	Peak	V	-	-	-56.66	7.82	-9.54	48.62	68.20	-19.58

Table 7-58. Radiated Measurements MIMO (242 Tones)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 293 of 302

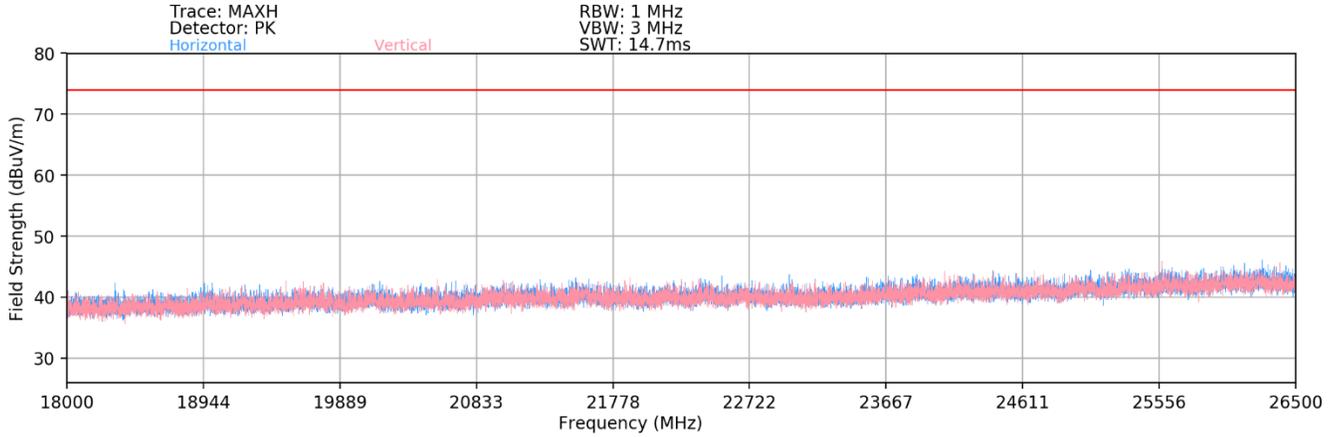

Plot 7-481. Radiated Spurious Plot above 18GHz - 26.5GHz MIMO (802.11ax)

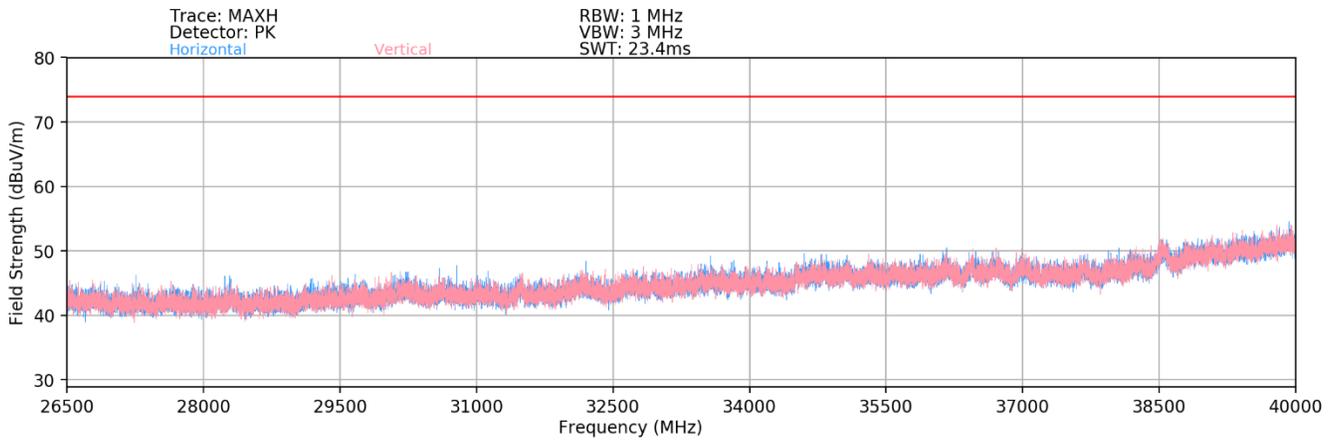

Plot 7-482. Radiated Spurious Plot 26.5GHz - 40GHz MIMO (802.11ax)


FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 294 of 302



7.7.3 MIMO Radiated Band Edge Measurements (20MHz BW – Full Tone)


§15.407(b.6) §15.205 §15.209

Worst Case Mode:	<u>802.11ax</u>
Worst Case Transfer Rate:	<u>MCS0</u>
RU Index	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>5935MHz</u>
Channel:	<u>2</u>

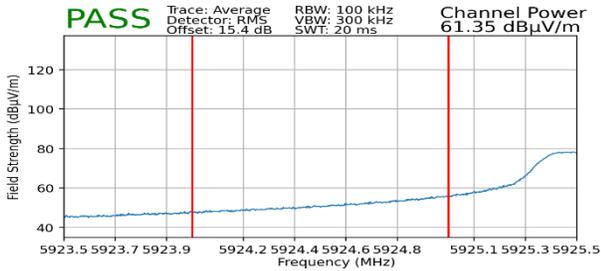

Plot 7-483. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

Worst Case Mode:	<u>802.11ax</u>
Worst Case Transfer Rate:	<u>MCS0</u>
RU Index	<u>61</u>
Distance of Measurements:	<u>3 Meters</u>
Operating Frequency:	<u>7115MHz</u>
Channel:	<u>233</u>

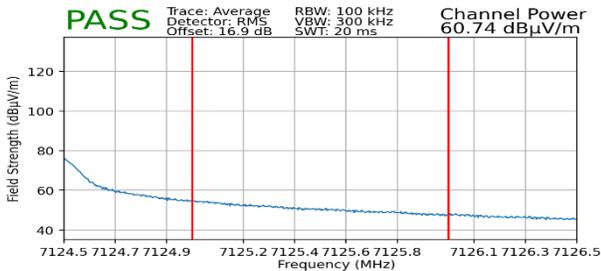


Plot 7-484. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 295 of 302

7.7.4 MIMO Radiated Band Edge Measurements (40MHz BW – Full Tone)


§15.407(b.5) §15.205 §15.209

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	5965MHz
Channel:	3

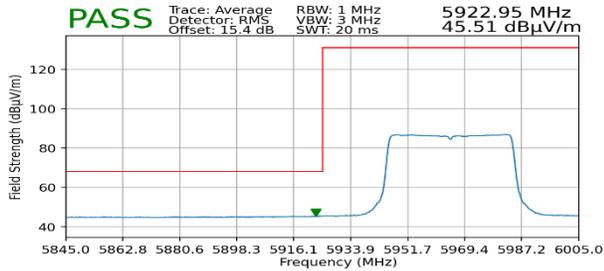

Plot 7-485. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

Worst Case Mode:	802.11ax
Worst Case Transfer Rate:	MCS0
RU Index	65
Distance of Measurements:	3 Meters
Operating Frequency:	7085MHz
Channel:	227

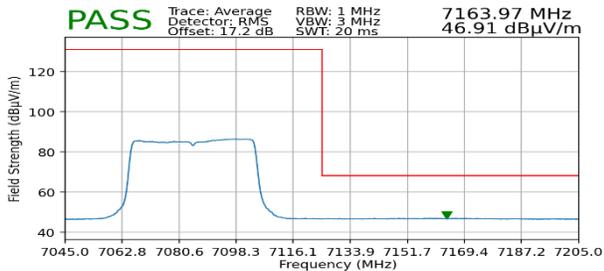


Plot 7-486. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 296 of 302




7.7.5 MIMO Radiated Band Edge Measurements (80MHz BW Full Tone) §15.407(b.5) §15.205 §15.209

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 5985MHz
 Channel: 7

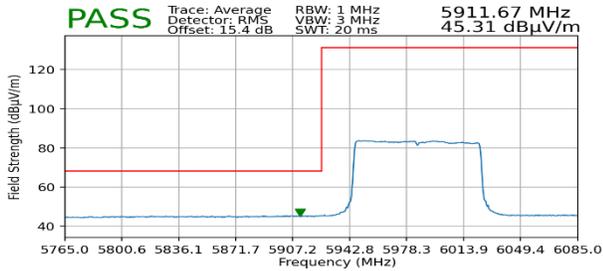

Plot 7-487. Radiated Lower Band Edge Plot MIMO (Average – UNII Band 5)

Worst Case Mode: 802.11ax
 Worst Case Transfer Rate: MCS0
 RU Index: 67
 Distance of Measurements: 3 Meters
 Operating Frequency: 7025MHz
 Channel: 215

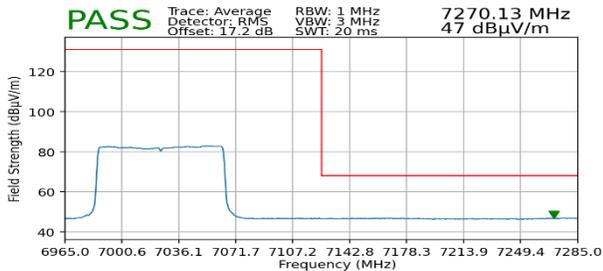

Plot 7-488. Radiated Upper Band Edge Plot MIMO (Average – UNII Band 8)

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 297 of 302

7.8 Radiated Spurious Emissions Measurements – Below 1GHz

§15.209

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-59 per Section 15.209.

Frequency	Field Strength [μ V/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 7-59. Radiated Limits

Test Procedures Used

ANSI C63.10-2013

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 120kHz (for emissions from 30MHz – 1GHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 298 of 302

Test Setup

The EUT and measurement equipment were set up as shown in the diagrams below.

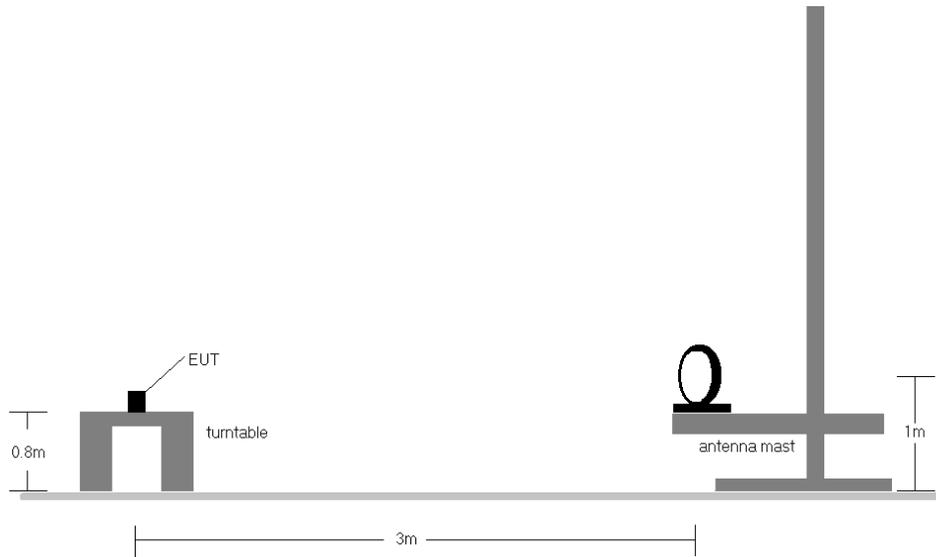


Figure 7-7. Radiated Test Setup < 30MHz

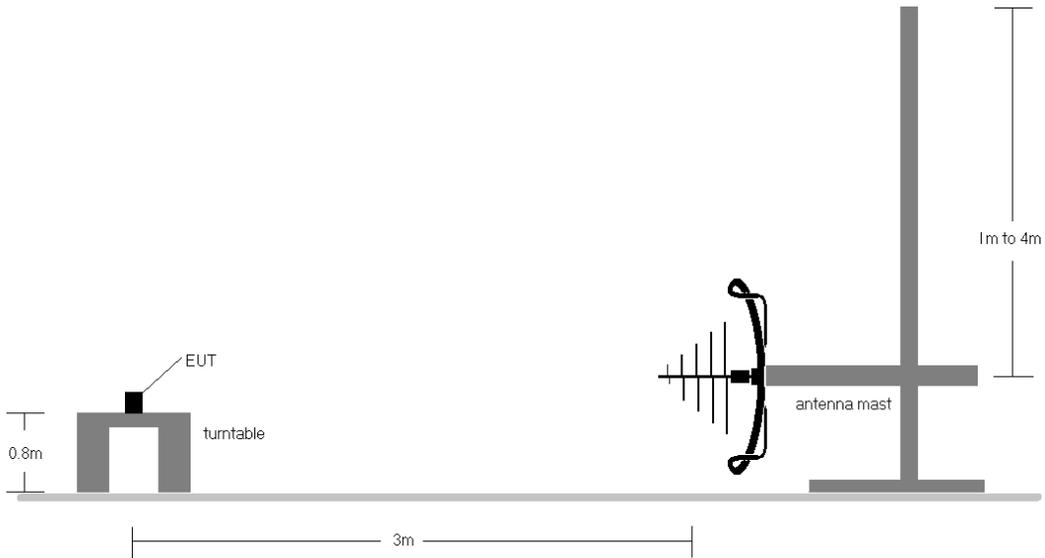


Figure 7-8. Radiated Test Setup < 1GHz

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 299 of 302


Test Notes

1. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-59.
2. The broadband receive antenna is manipulated through vertical and horizontal polarizations during the tests. The EUT is manipulated through three orthogonal planes.
3. This unit was tested with its standard battery.
4. The spectrum is investigated using a peak detector and final measurements are recorded using CISPR quasi peak detector. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
5. Emissions were measured at a 3 meter test distance.
6. Emissions are investigated while operating on the center channel of the mode, band, and modulation that produced the worst case results during the transmitter spurious emissions testing.
7. No spurious emissions were detected within 20dB of the limit below 30MHz.
8. The results recorded using the broadband antenna is known to correlate with the results obtained by using a tuned dipole with an acceptable degree of accuracy. The VSWR for the measurement antenna was found to be less than 2:1.
9. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. There were no emissions detected in the 30MHz – 1GHz frequency range, as shown in the subsequent plots.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 300 of 302

Radiated Spurious Emissions Measurements (Below 1GHz)

§15.209

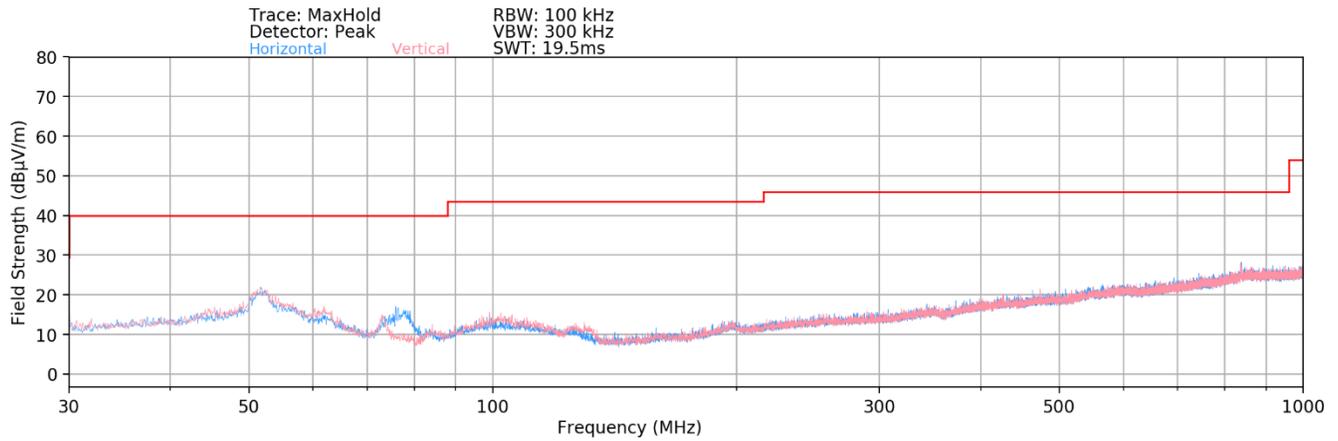

Plot 7-489. Radiated Spurious Plot below 1GHz

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	Limit [dBµV/m]	Margin [dB]
42.11	Quasi-Peak	V	-	-	-96.35	26.09	36.74	40.00	-3.26

Table 7-60. Radiated Spurious Data below 1GHz

FCC ID: A3LSMF936U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset		Page 301 of 302

8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMF936U** is in compliance with Part 15 Subpart E (15.407) of the FCC Rules for operation as a client device.

FCC ID: A3LSMF936U	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2204010046-18.A3L	Test Dates: 4/1/2022 – 06/22/2022	EUT Type: Portable Handset	Page 302 of 302