

FCC BT REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
May 28, 2023

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si,
Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:
74, Seoicheon-ro 578 beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2305-FC062-R2

FCC ID: A3LSMF946B

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-F946B/DS
Additional Model: SM-F946B
EUT Type: Mobile Phone
Max. RF Output Power: Ant.1: 17.600 dBm (57.54 mW)
Ant.2: 15.540 dBm (35.81 mW)
Frequency Range: 2402 MHz– 2480 MHz (Bluetooth)
Modulation type GFSK(Normal), π /4DQPSK and 8DPSK(EDR)
FCC Classification: FCC Part 15 Spread Spectrum Transmitter (DSS)
FCC Rule Part(s): Part 15 subpart C 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance

Report No.: HCT-RF-2305-FC062-R2

REVIEWED BY



Report prepared by : Jin Gwan Lee
Engineer of Telecommunication Testing Center

Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2305-FC062	May 19, 2023	- First Approval Report
HCT-RF-2305-FC062-R1	May 26, 2023	- Correction of unit conversion results related to conducted output power - Revised the Antenna configuration
HCT-RF-2305-FC062-R2	May 28, 2023	- Added the note #4 on page 27.

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
ANTENNA CONFIGURATIONS	6
2. Requirements for Bluetooth transmitter(15.247).....	7
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	8
GENERAL TEST PROCEDURES	8
DESCRIPTION OF TEST MODES	8
4. INSTRUMENT CALIBRATION.....	9
5. FACILITIES AND ACCREDITATIONS	9
FACILITIES	9
EQUIPMENT	9
6. ANTENNA REQUIREMENTS	9
7. MEASUREMENT UNCERTAINTY	10
8. DESCRIPTION OF TESTS	11
9. SUMMARY OF TEST RESULTS	29
10. TEST RESULT	30
10.1 PEAK POWER	30
10.2 BAND EDGES.....	35
10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW).....	40
10.4 NUMBER OF HOPPING FREQUENCY	56
10.5 TIME OF OCCUPANCY (DWELL TIME)	59
10.6 SPURIOUS EMISSIONS.....	71
10.6.1 CONDUCTED SPURIOUS EMISSIONS	71
10.6.2 RADIATED SPURIOUS EMISSIONS.....	72
10.6.3 RADIATED RESTRICTED BAND EDGES	93
10.7 POWERLINE CONDUCTED EMISSIONS	103
11. LIST OF TEST EQUIPMENT	105
12. ANNEX A_ TEST SETUP PHOTO.....	108

1. EUT DESCRIPTION

Model	SM-F946B/DS
Additional Model	SM-F946B
EUT Type	Mobile Phone
Power Supply	DC 3.88 V
Frequency Range	2 402 MHz ~ 2 480 MHz
Max. RF Output Power	Ant.1: 17.600 dBm (57.54 mW) Ant.2: 15.540 dBm (35.81 mW)
BT Operating Mode	Normal, EDR, AFH
Modulation Type	GFSK(Normal), $\pi/4$ DQPSK and 8DPSK(EDR)
Modulation Technique	FHSS
Number of Channels	79 Channels, Minimum 20 Channels(AFH)
Date(s) of Tests	March 24 2023 ~ May 19, 2023
Serial number	Radiated: 723cc3597a4d7ece Conducted: 723cbc64c674d7ece

ANTENNA CONFIGURATIONS

1. Below are the possible configurations

Configurations	SISO		Dual BT
	Ant1(core-0)	Ant2(Core-1)	Ant1 & Ant2
Bluetooth	O	O	X

Note:

- 1) O = Support, X = Not Support
- 2) SISO = Single Input Single Output
- 3) Dual BT = Single Output 1& 2

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4 GHz and 5 GHz or 6GHz Bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

2. Requirements for Bluetooth transmitter(15.247)

This Bluetooth module has been tested by a Bluetooth Qualification Lab, and we confirm the following:

- 1) This system is hopping pseudo-randomly.
- 2) Each frequency is used equally on the average by each transmitter.
- 3) The receiver input bandwidths that match the hopping channel bandwidths of their corresponding transmitters
- 4) The receiver shifts frequencies in synchronization with the transmitted signals.
 - 15.247(g): The system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this Section 15.247 should the transmitter be presented with a continuous data (or information) stream.
 - 15.247(h): The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

3. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Device (ANSI C63.10-2013, KDB 558074) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013). To record the final measurements, the analyzer detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 120 kHz for frequencies below 1 GHz or 1 MHz for frequencies above 1 GHz. For average measurements above 1 GHz, the analyzer was set to peak detector and add the D.C.C.F calculations.

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22. Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

8. DESCRIPTION OF TESTS


8.1. Conducted Maximum Peak Output Power

Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 W. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 W.
2. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi.

Test Configuration

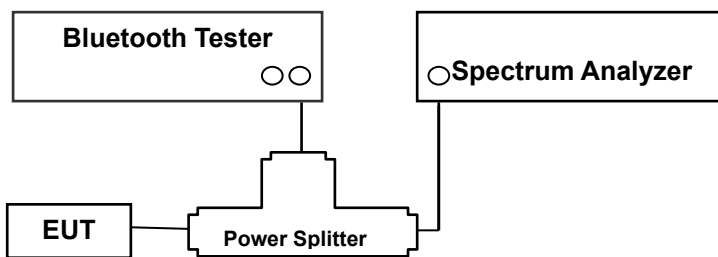

Test Procedure

The transmitter output is connected to the Spectrum Analyzer. The Spectrum Analyzer is set to the peak detector mode. This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.5 in ANSI 63.10-2013& Procedure 10(b)(6)(i) in KDB 558074 v05r02)


- 1) Span: approximately 5 times the 20 dB bandwidth, centered on a hopping channel
- 2) RBW > the 20 dB bandwidth of the emission being measured
- 3) VBW \geq RBW
- 4) Sweep = Auto
- 5) Detector = Peak
- 6) Trace = Max hold

8.2. Conducted Band Edge(Out of Band Emissions)

Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Configuration

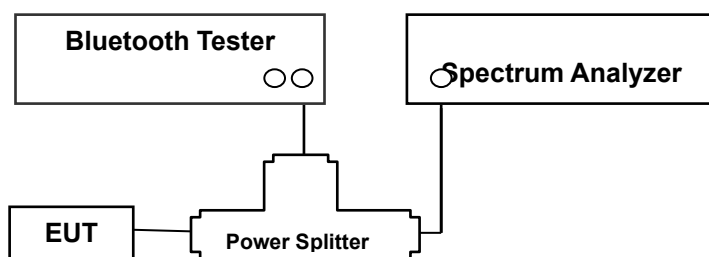

Test Procedure

This test is performed with hopping off and hopping on.

The Spectrum Analyzer is set to (6.10.4 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)


- 1) Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation
- 2) Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level.
- 3) Attenuation: Auto (at least 10 dB preferred).
- 4) Sweep time: Coupled.
- 5) RBW: 100 kHz
- 6) VBW: 300 kHz
- 7) Detector: Peak
- 8) Trace: Max hold

8.3. Frequency Separation & 20 dB Bandwidth

Limit

According to §15.247(a)(1), Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Configuration

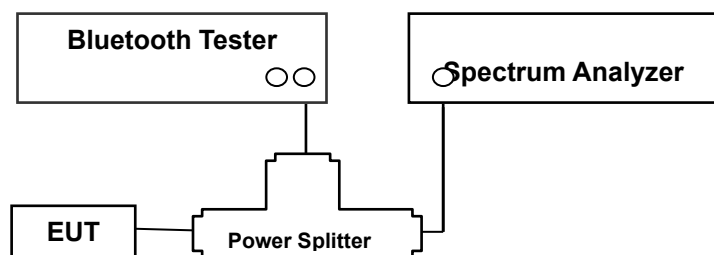

Test Procedure(Frequency Separation)

The Channel Separation test is performed with hopping on.
And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.2 in ANSI 63.10-2013 & Procedure 10(b)(6)(iii) in KDB 558074 v05r02)

- 1) Span: Wide enough to capture the peaks of two adjacent channels
- 2) RBW: Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.
- 8) Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.

Test Procedure (20 dB Bandwidth)

And the 20 dB Bandwidth test is performed with hopping off.

The Spectrum Analyzer is set to (6.9.2 in ANSI 63.10-2013)


- 1) Span: Set between two times and five times the OBW
- 2) RBW: 1 % to 5 % of the OBW.
- 3) VBW $\geq 3 \times$ RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) All the trace to stabilize.

8.4. Number of Hopping Frequencies

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration

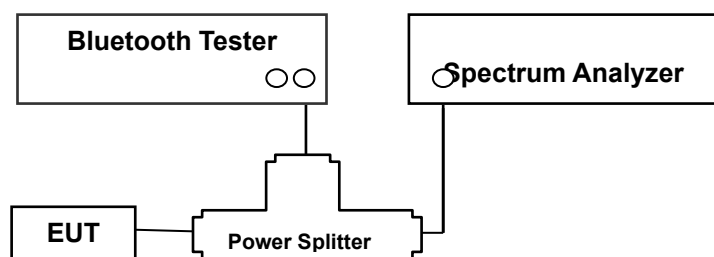

Test Procedure

The Bluetooth frequency hopping function of the EUT was enabled.

The Spectrum Analyzer is set to (7.8.3 in ANSI 63.10-2013 & Procedure 10(b)(4) in KDB 558074 v05r02)


- 1) Span: the frequency band of operation
- 2) RBW: To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- 3) VBW \geq RBW
- 4) Sweep: Auto
- 5) Detector: Peak
- 6) Trace: Max hold
- 7) Allow the trace to stabilize.

8.5. Time of Occupancy

Limit

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400 MHz ~ 2483.5MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration

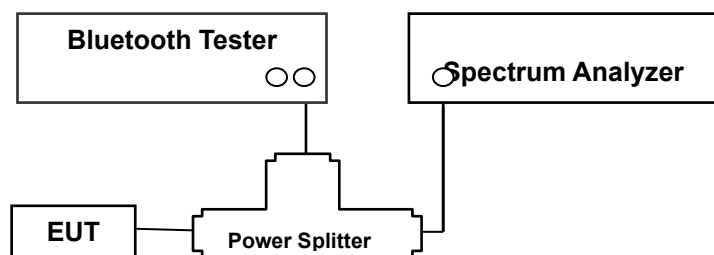

Test Procedure

This test is performed with hopping off.

The Spectrum Analyzer is set to (7.8.4 in ANSI 63.10-2013& Procedure 10(b)(6)(iv) in KDB 558074 v05r02)

- 1) Span: Zero span, centered on a hopping channel
- 2) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- 3) Sweep = as necessary to capture the entire dwell time per hopping channel
- 4) Detector: Peak
- 5) Trace: Max hold

The marker-delta function was used to determine the dwell time.

Sample Calculation

The following calculation process is not relevant to our measurement results. It is just an example.

(1) Non-AFH Mode

- DH 5 (GFSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (1600/6)/79 \times 31.6 = 308.27$ (ms)

(2) AFH Mode

- DH 5 (GFSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 2-DH 5 ($\pi/4$ DQPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)
- 3-DH 5 (8DPSK) : $2.890 \times (800/6)/20 \times 8.0 = 154.13$ (ms)

Note :

DH5 Packet need 5 time slot for transmitting and 1 time slot for receiving.

Then the system makes worst case 1600/6 hops per second with 79 channels. So the system have each channel 3.3755 times per second and so for 31.6 seconds the system have 106.667 times of appearance.

Each tx-time per appearance of DH5 is 2.890 ms.


Dwell time = Tx-time x 106.667 = 308.27 (ms)

8.6. Conducted Spurious Emissions

Limit

Conducted > 20 dBc

Test Configuration

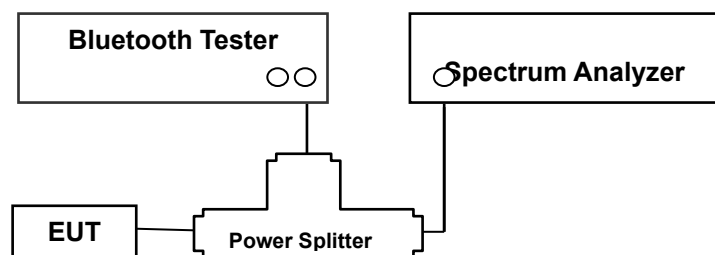

Test Procedure

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer.

The Spectrum Analyzer is set to (7.8.8 in ANSI 63.10-2013& Procedure 8.5 and 8.6 in KDB 558074 v05r02)

- 1) Span:30 MHz to 10 times the operating frequency in GHz.
- 2) RBW: 100 kHz
- 3) VBW: 300 kHz
- 4) Sweep: Coupled
- 5) Detector: Peak

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

This test is performed with hopping off.

Factors for frequency

Freq(MHz)	Factor(dB)
30	16.71
100	16.79
200	16.87
300	17.00
400	17.06
500	17.08
600	17.08
700	17.12
800	17.16
900	17.19
1000	17.23
2000	17.50
2400	17.47
2500	17.47
3000	17.71
4000	17.89
5000	18.09
6000	18.09
7000	18.20
8000	18.19
9000	18.38
10000	18.50
11000	18.63
12000	18.77
13000	18.86
14000	18.98
15000	19.09
16000	19.17
17000	19.29
18000	19.31
19000	19.30
20000	19.35
21000	19.38
22000	19.45
23000	19.61
24000	19.62
25000	19.64
26000	19.70

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Cable loss(2 EA) + Splitter loss(6 dB)


8.7. Radiated Test

Limit


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

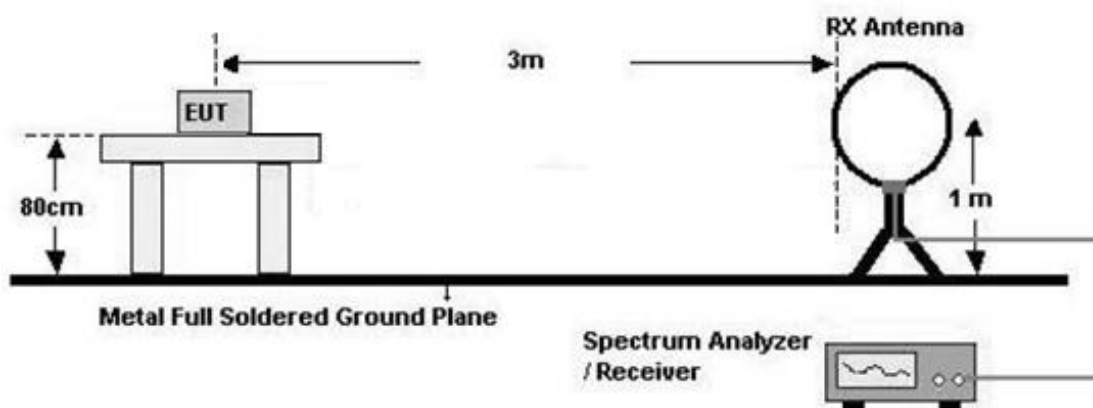

30 MHz - 1 GHz

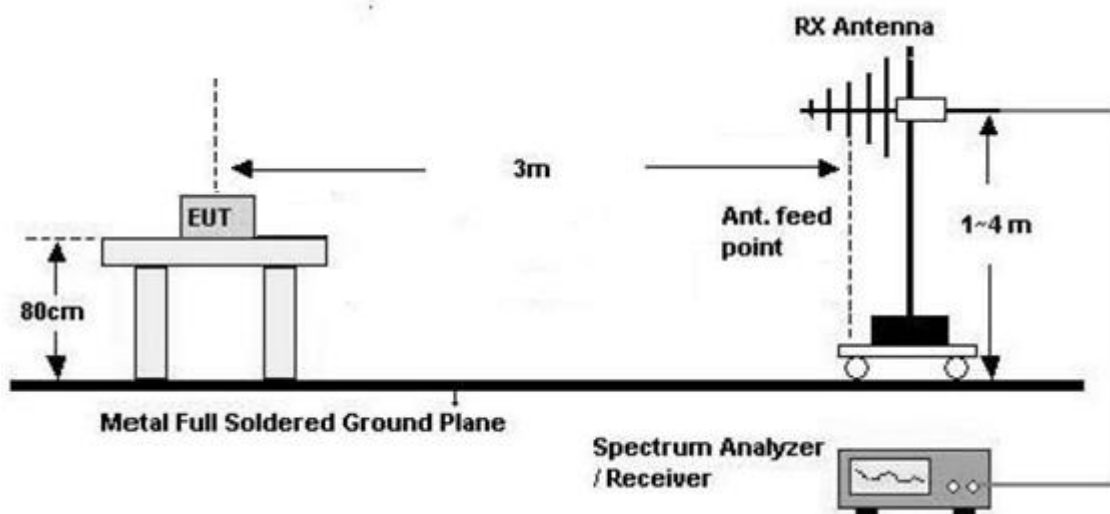

Above 1 GHz

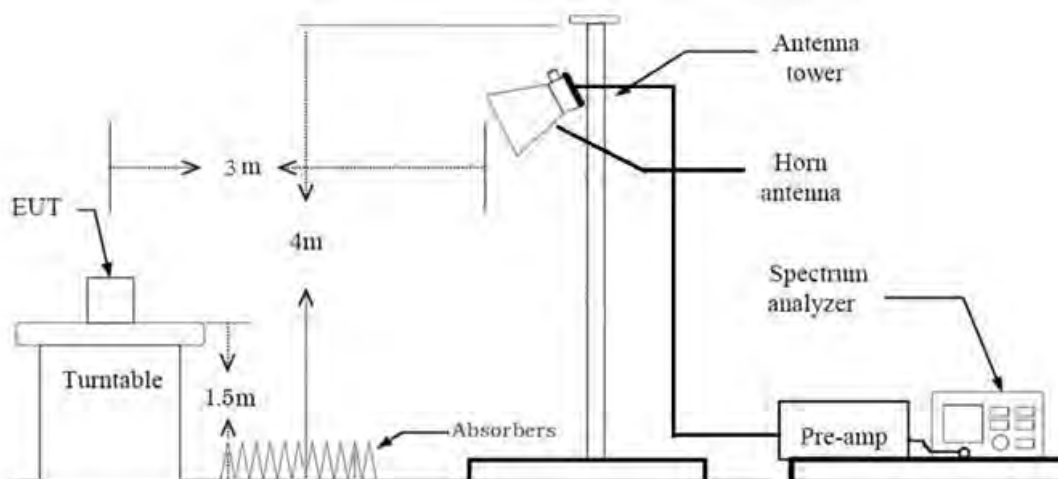

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$
Measurement Distance : 3 m

8. Spectrum Setting

- Frequency Range = 9 kHz ~ 30 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 9 kHz
- VBW \geq 3 x RBW

9.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)

8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond

the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance}) \text{ (dB)}$
12. Total(Measurement Type : Peak)
 - = Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – Amp Gain(A.G)Total(Measurement Type : Average)
 - = Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) - Amp Gain(A.G)
 - + D.C.C.F(AFH)

Test Procedure of Radiated Restricted Band Edge

1. Radiated test is performed with hopping off.
2. The EUT is placed on a turntable, which is 1.5 m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - Average value of pulsed emissions
 - Unless otherwise specified, when the radiated emission limits are expressed in terms of the average value of the emission and pulsed operation is employed, the average measurement shall determine from the peak field strength after correcting for the worst-case duty cycle as described in Number.14 (On Page. 23)
 - ◆ Duty Cycle Correction(AFH) = $20\log(\text{Worst Case Dwell Time} / 100\text{ms}) \text{ dB} = -24.7314 \text{ dB}$
9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance}) \text{ (dB)}$
- 11.Total
 - (1)Measurement(Peak)
Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
 - (2)Measurement(Avg)
Measured Value(Peak) + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)
+ D.C.C.F(AFH)

8.8. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

8.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone etc)
 - Worstcase : Stand alone
2. The EUT was tested in three modes(Open, Half-open, Closed), the worst case configuration results are reported.
 - (1) Ant 1
 - Radiated Spurious Emissions : Worst Case Closed mode
 - Radiated Restricted Band Edge : Worst Case Closed mode
 - (2) Ant 2
 - Radiated Spurious Emissions : Worst Case Closed mode
 - Radiated Restricted Band Edge : Worst Case Closed mode
3. EUT Axis
 - (1) Ant 1
 - Radiated Spurious Emissions : Y
 - Radiated Restricted Band Edge : X
 - (2) Ant 2
 - Radiated Spurious Emissions : X
 - Radiated Restricted Band Edge : X
4. All data rate of operation were investigated and the test results are worst case in highest datarate of each mode.
 - GFSK : DH5
 - $\pi/4$ DQPSK : 2-DH5
 - 8DPSK : 3-DH5
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.
(Worst case : SM-F946B/DS)

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, Keyboard, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : Z

3. All of RSDB Scenario were investigated and the worst case configuration results are reported.

- Worst case : Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5 GHz WiFi Ant.1	5 GHz WiFi Ant.2	6 GHz WiFi Ant.1	6 GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2	Test Case
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	on	on			on	on			Scenario1
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	on	on	on	on					Scenario2
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO		on	on	on			on		Scenario3
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 6 GHz WiFi MIMO		on			on	on	on		

4. The RSDB mode test investigated both intermodulation and radiated spurious emissions.

And the worst results were reported.

- Worst result: Radiated spurious emissions
- Intermodulation: No signals are generated.
- Radiated spurious emissions: cf. Section 10.6.2.

5. The following tables show the worst case configurations determined during testing.

(Worst case: The lowest margin condition the channels and modes were selected for test.)

RSDB Scenario 1	Description	2.4GHz Emission	6 GHz Emission
2.4 GHz WiFi MIMO + 6 GHz WiFi MIMO	Antenna	Ant All	Ant All
	Channel	11	2
	Data Rate	1 Mbps	MCS 0
	Mode	802.11b	802.11ax(HE20) 242 Tone RU 61

Note : DTS, UNII 6e RSDB Data refer to [DTS], [UNII 6e] Test Report

RSDB Scenario 2	Description	2.4GHz Emission	5 GHz Emission
2.4 GHz WiFi MIMO + 5 GHz WiFi MIMO	Antenna	Ant All	Ant All
	Channel	11	120
	Data Rate	1 Mbps	6 Mbps
	Mode	802.11b	802.11a

Note : DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

RSDB Scenario 3	Description	Bluetooth Emission	2.4GHz Emission	5 GHz Emission
Bluetooth ANT.1 + 2.4 GHz WiFi ANT.2 + 5 GHz WiFi MIMO	Antenna	ANT1	ANT2	Ant All
	Channel	0	6	120
	Data Rate	1 Mbps	1 Mbps	6 Mbps
	Mode	$\pi/4$ -DQPSK	802.11b	802.11a

Note : DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone+ External accessories(Earphone,etc)+Travel Adapter

Stand alone + Travel Adapter

- Worstcase : Stand alone + Travel Adapter

2. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

Conducted test

1. The EUT was configured with data rate of highest power.

- GFSK : DH5

- $\pi/4$ DQPSK : 2-DH5

- 8DPSK : 3-DH5

2. AFH & Non-AFH were tested and the worst case results are reported.

(Worst case : Non-AFH)

3. SM-F946B/DS, SM-F946B were tested and the worst case results are reported.

(Worst case : SM-F946B/DS)

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
20 dB Bandwidth	§15.247(a)(1)	N/A	Conducted	PASS
Occupied Bandwidth	N/A	N/A		N/A
Conducted Maximum Peak Output Power	§15.247(b)(1)	<0.125 W		PASS
Carrier Frequency Separation	§15.247(a)(1)	>25 kHz or >2/3 of the 20 dB BW		PASS
Number of Hopping Frequencies	§15.247(a)(1)(iii)	≥ 15		PASS
Time of Occupancy	§15.247(a)(1)(iii)	<400 ms		PASS
Conducted Spurious Emissions	§15.247(d)	> 20 dB for all out-of band emissions		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	> 20 dB for all out-of band emissions		PASS
AC Power line Conducted Emissions	§15.207(a)	cf. Section 8.8		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 8.7	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 8.7		PASS

Note: Average Power data refer to SAR report

10. TEST RESULT

10.1 PEAK POWER

[Ant.1]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	16.321	42.86	125
Mid	2441	17.600	57.54	
High	2480	15.659	36.80	

Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.960	39.45	125
Mid	2441	17.094	51.22	
High	2480	15.432	34.93	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.480	35.32	125
Mid	2441	16.668	46.43	
High	2480	15.003	31.64	


[Ant.2]

Channel	Frequency (MHz)	Output Power (GFSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.270	33.65	125
Mid	2441	15.540	35.81	
High	2480	14.510	28.25	


Channel	Frequency (MHz)	Output Power (8DPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	15.008	31.68	125
Mid	2441	15.280	33.73	
High	2480	14.275	26.76	

Channel	Frequency (MHz)	Output Power ($\pi/4$ DQPSK)		Limit (mW)
		(dBm)	(mW)	
Low	2402	14.505	28.22	125
Mid	2441	14.884	30.79	
High	2480	13.775	23.85	


■ TEST PLOTS

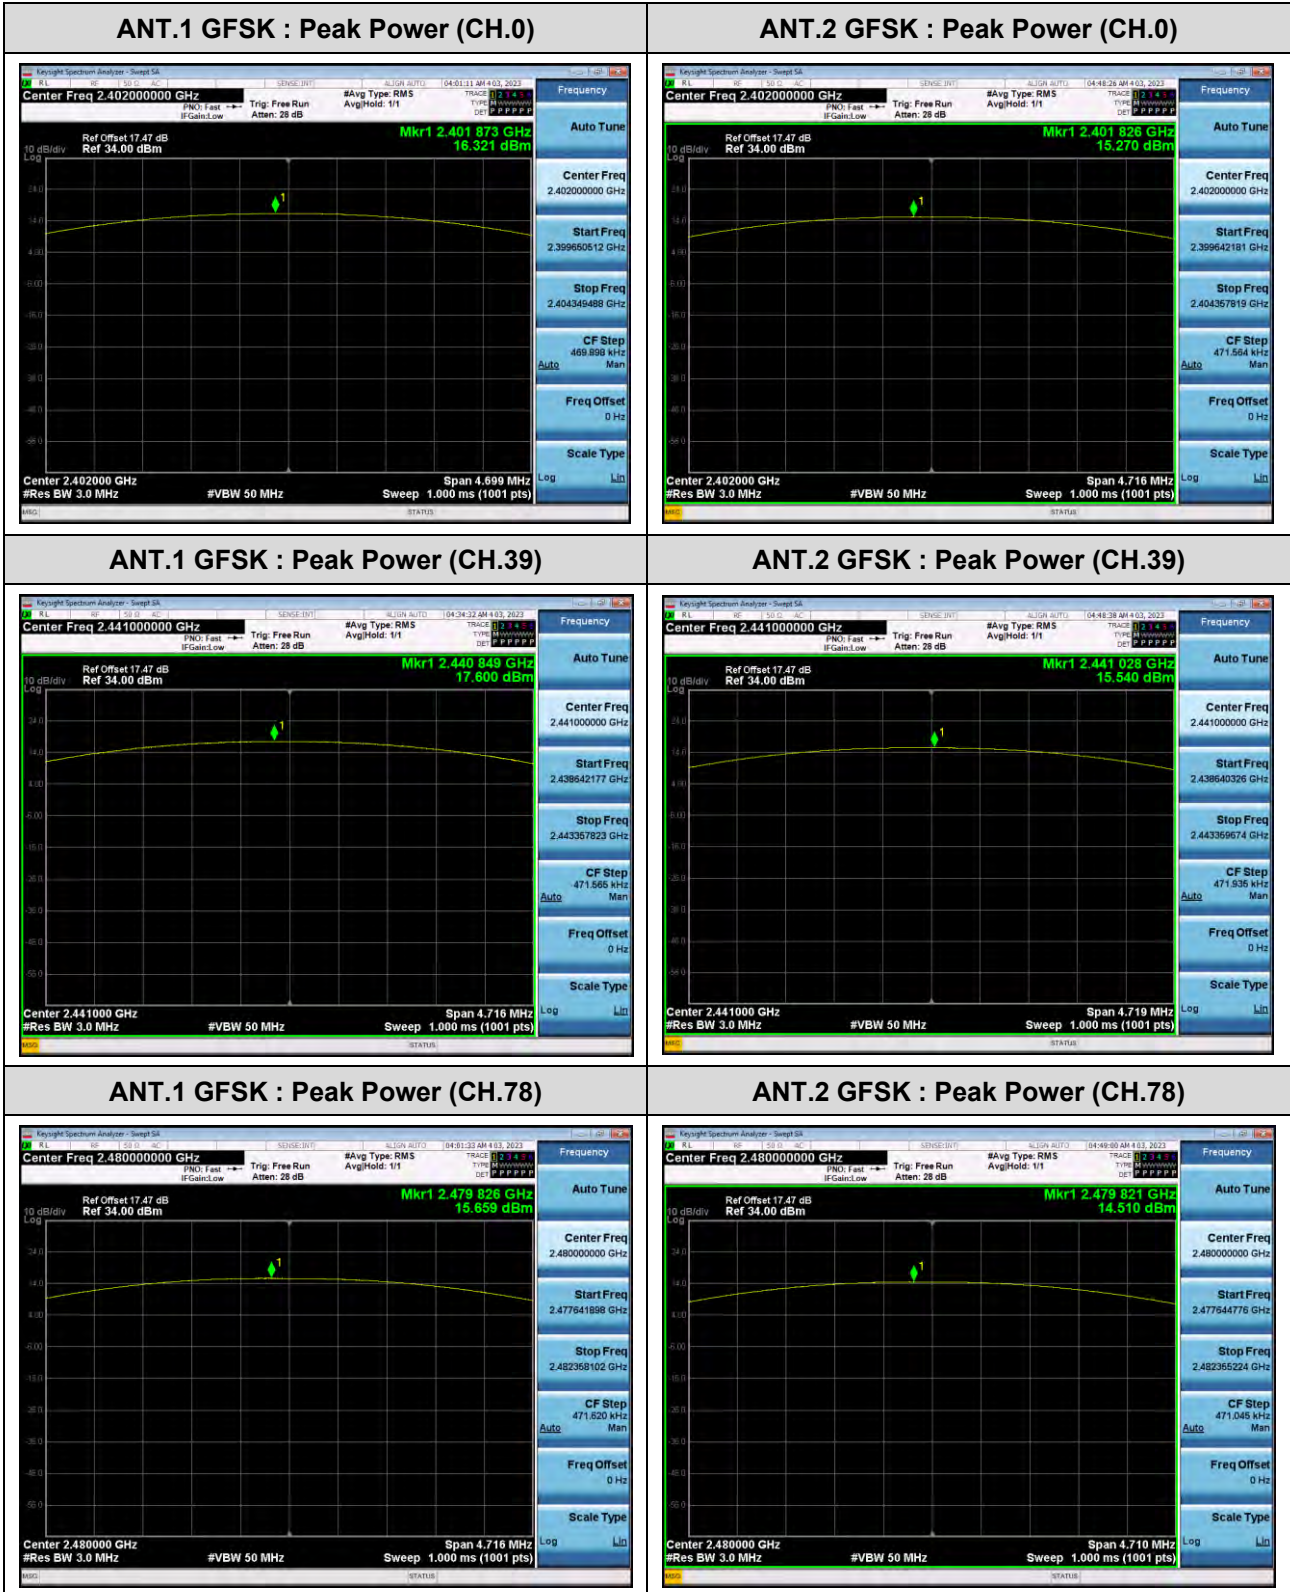

■ TEST PLOTS

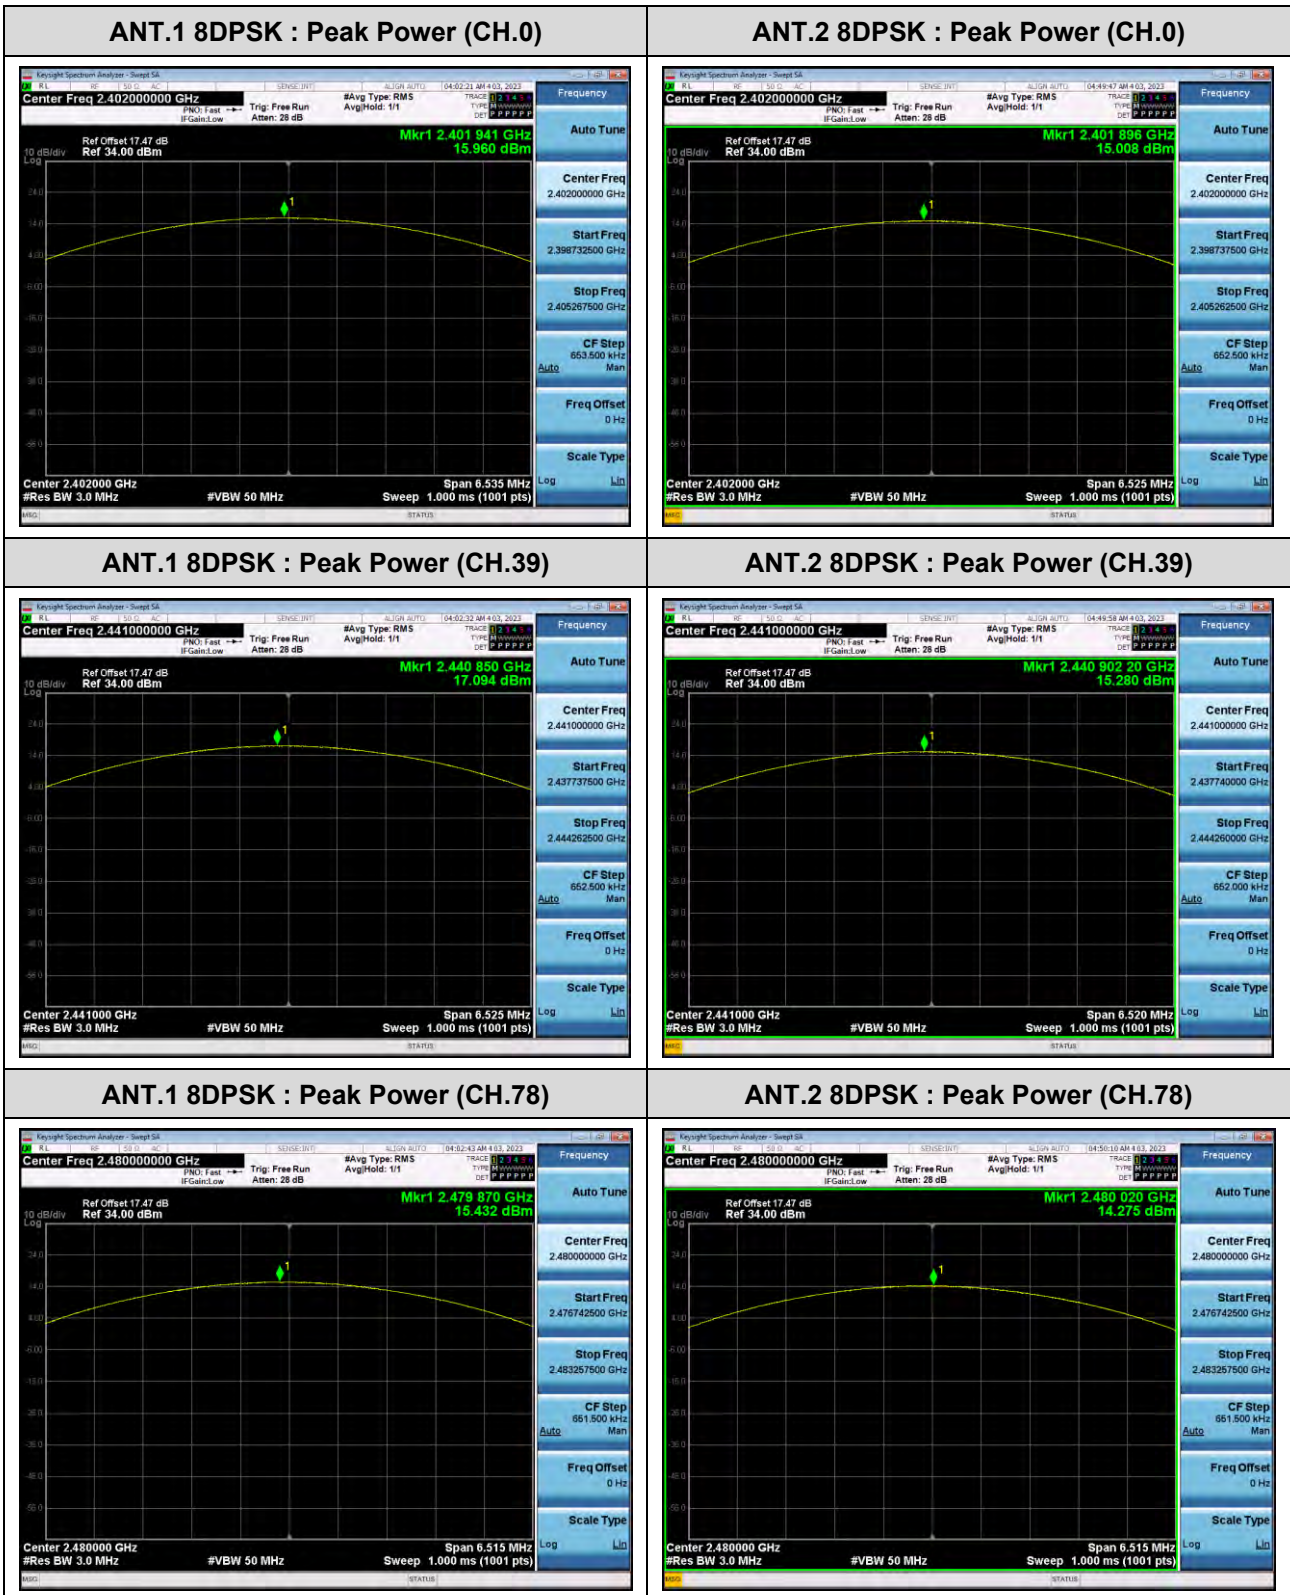

TEST PLOTS

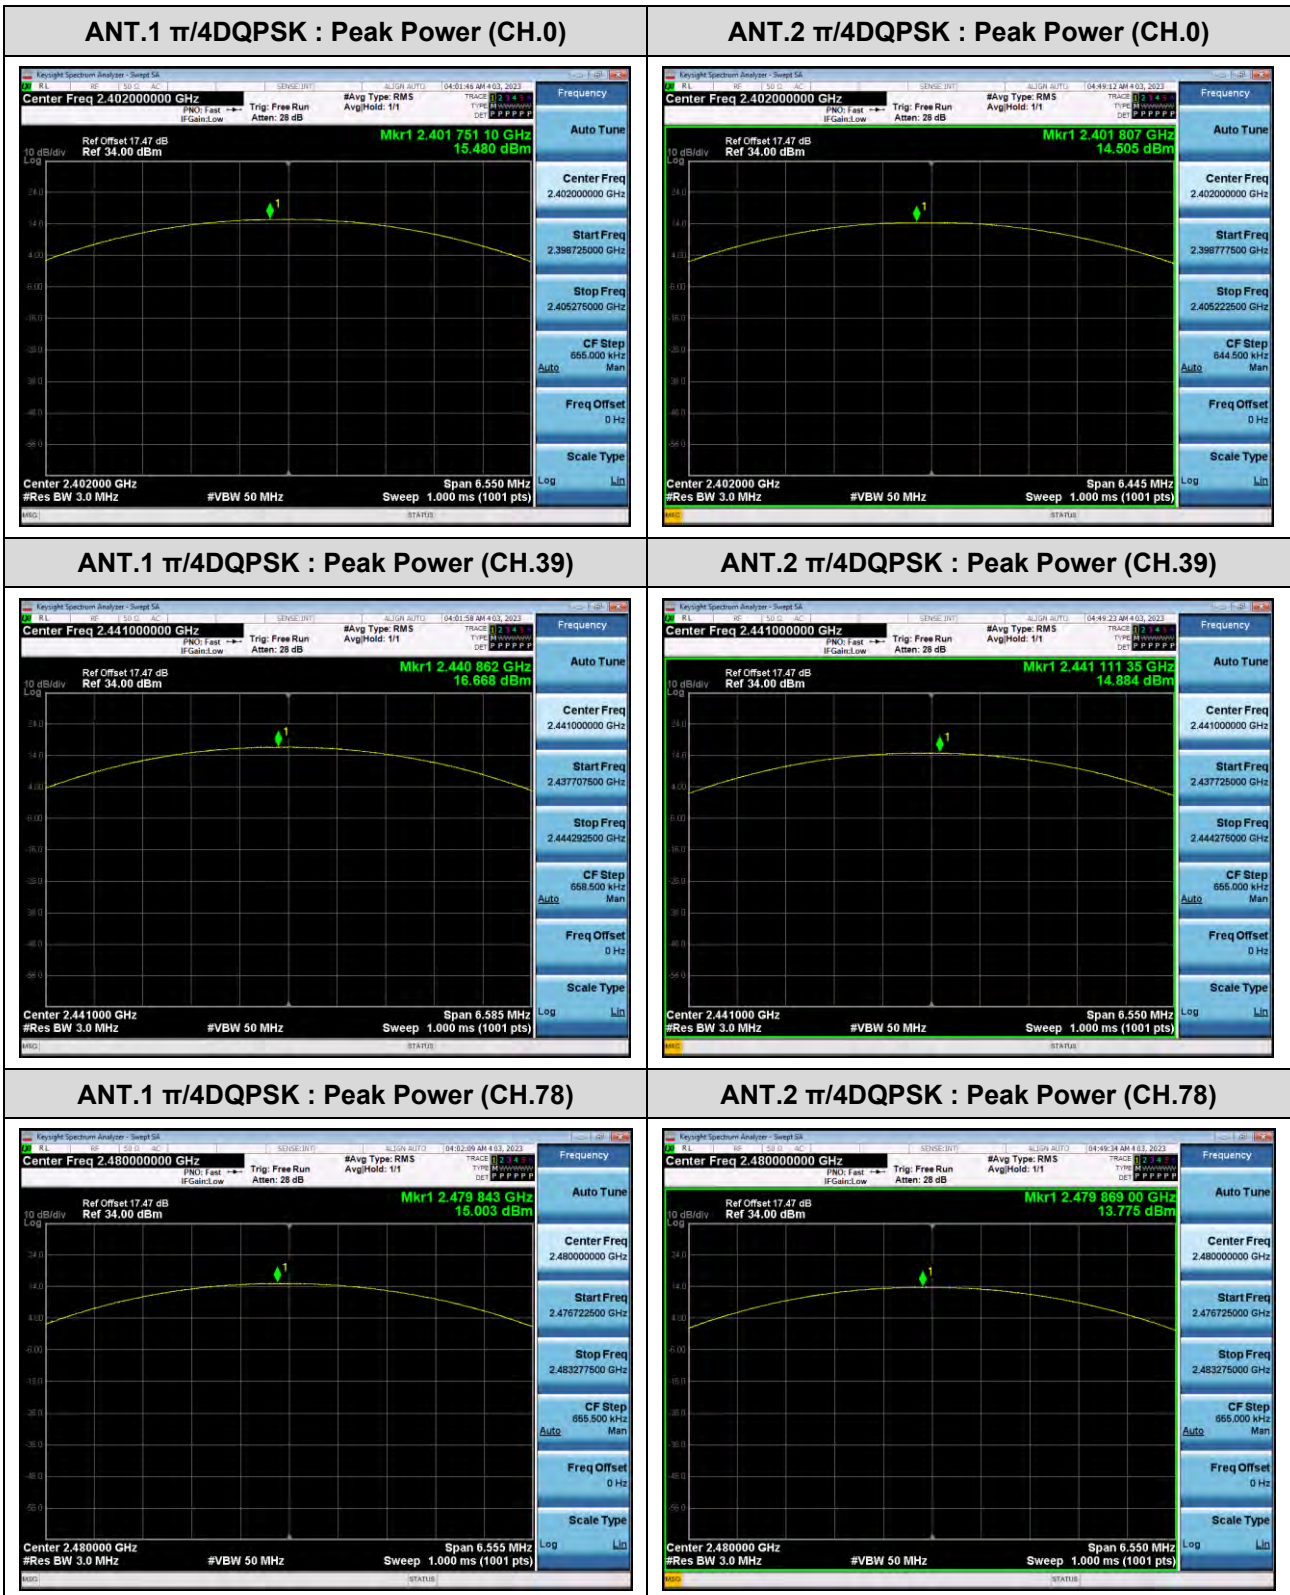

10.2 BAND EDGES

[Ant.1]

Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	58.214	56.946	55.725	20
Upper	59.083	56.411	56.833	

With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	58.118	56.741	57.419	20
Upper	59.341	55.527	55.948	

[Ant.2]


Without hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	58.131	55.584	55.126	20
Upper	57.687	54.830	55.870	


With hopping

Outside Frequency Band	GFSK (dB)	8DPSK (dB)	$\pi/4$ DQPSK (dB)	Limit (dBc)
Lower	57.639	55.070	56.387	20
Upper	57.136	55.378	55.201	


■ TEST PLOTS

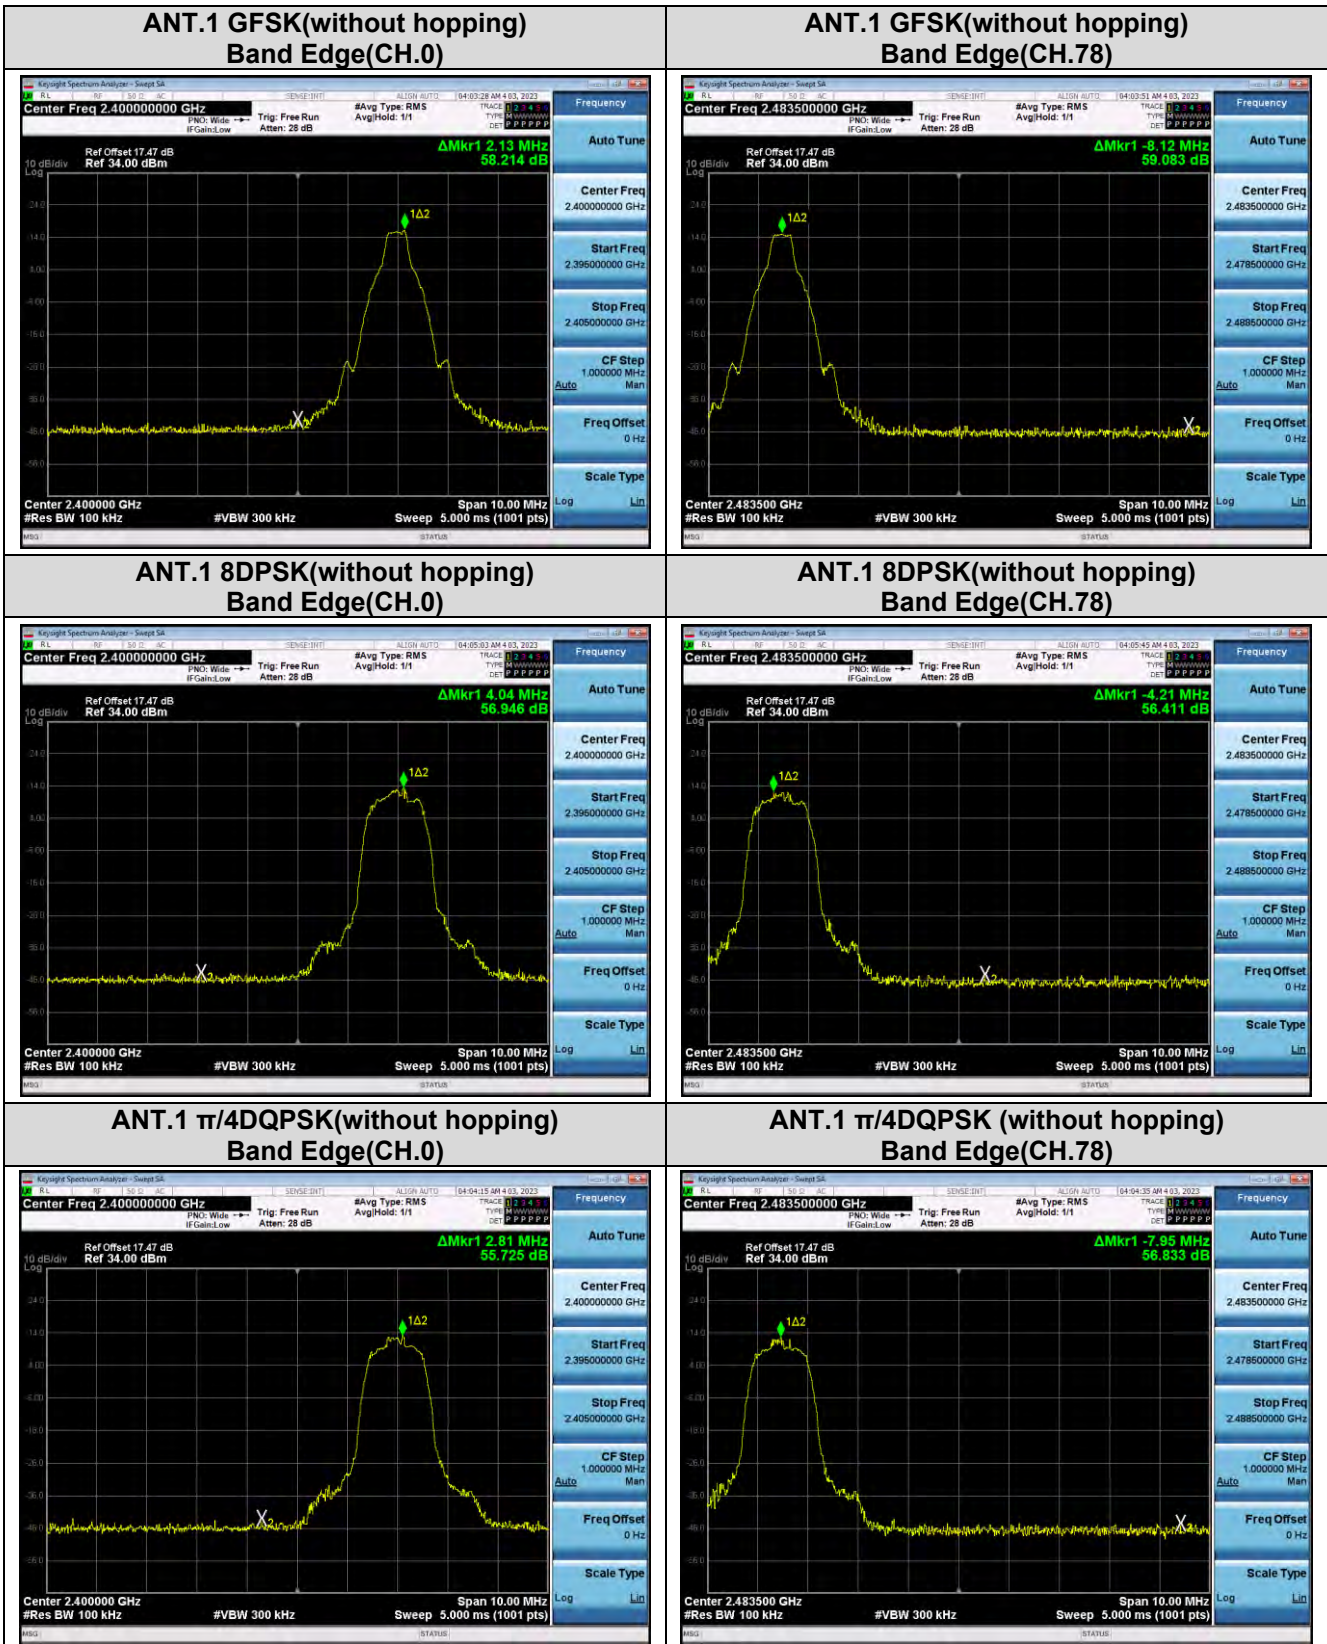


■ TEST PLOTS

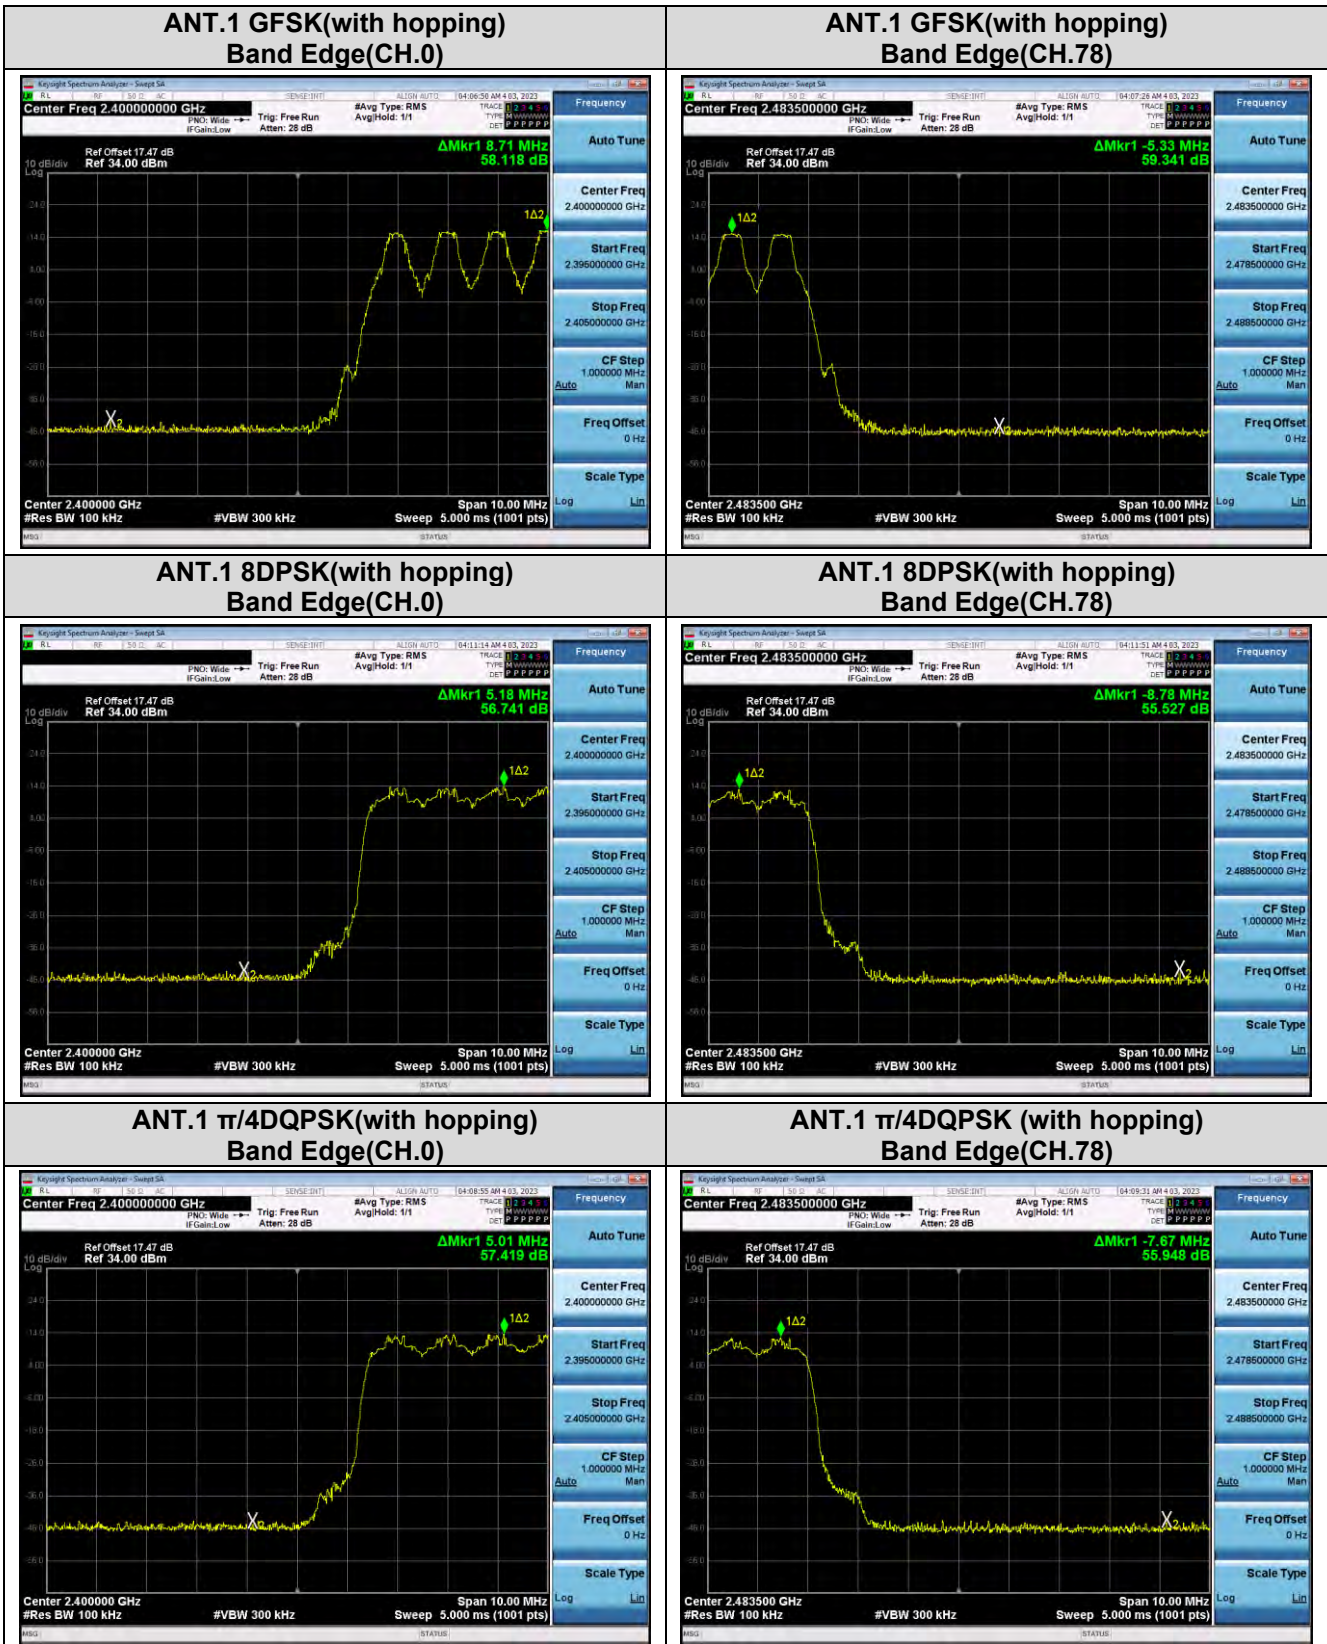

■ TEST PLOTS

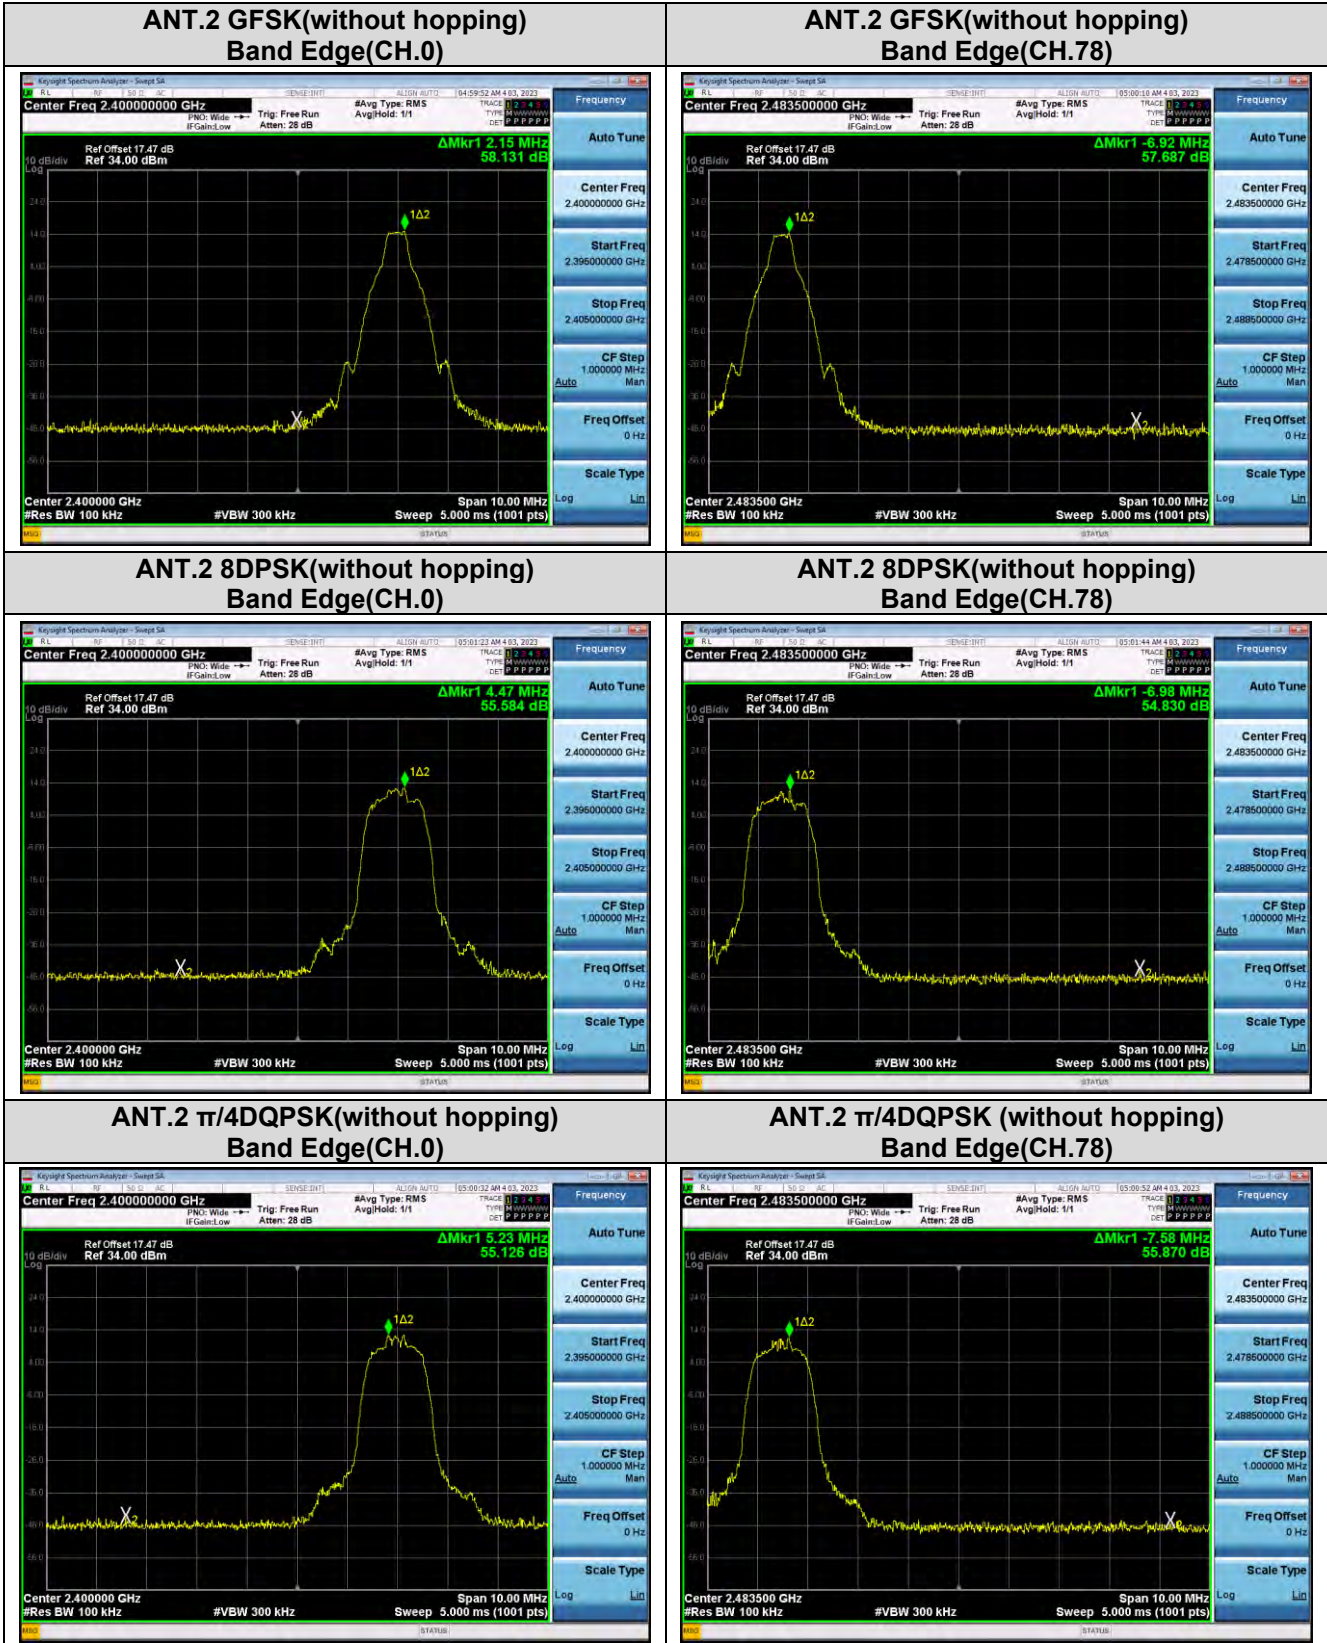

■ TEST PLOTS

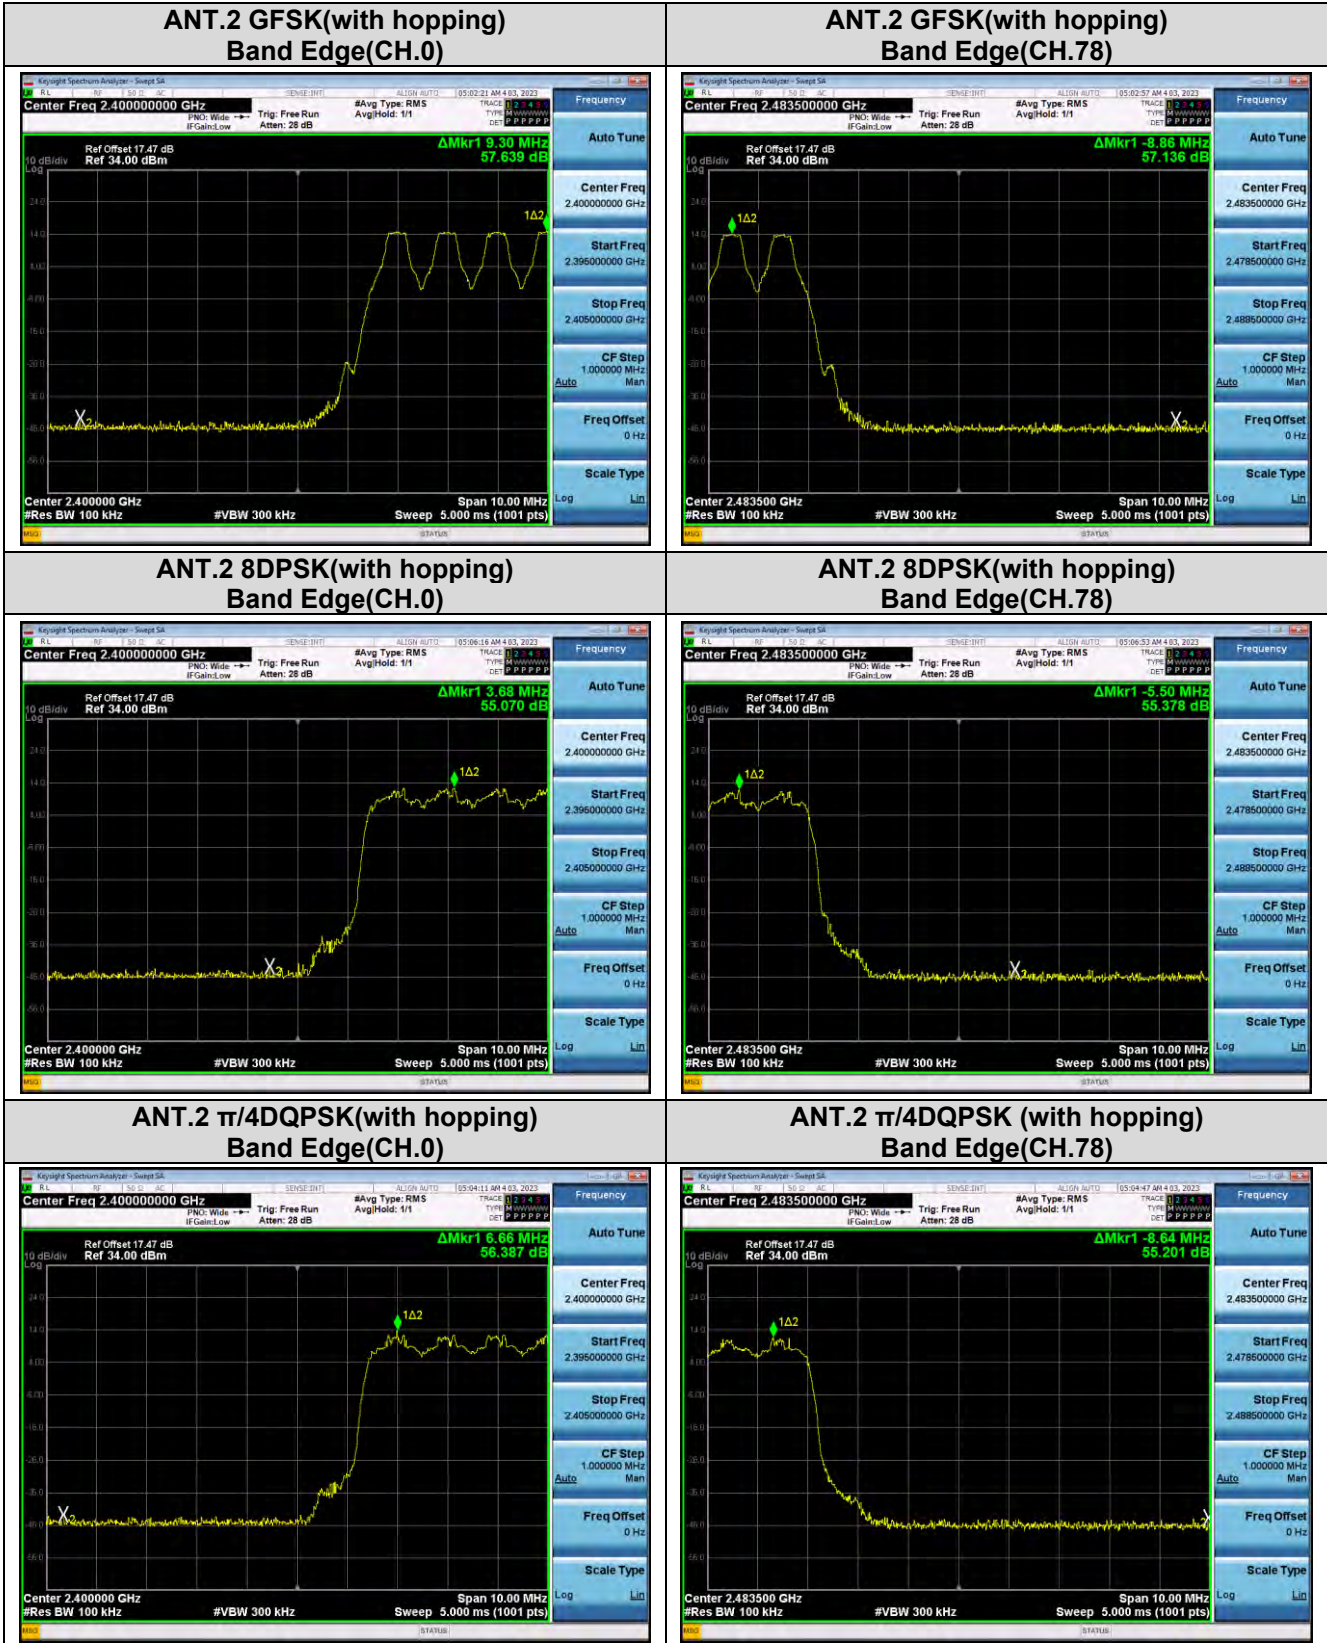

10.3 FREQUENCY SEPARATION / OCCUPIED BANDWIDTH (99 % BW)

[Ant.1]

99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	828.59	1177.0	1170.4
CH.39	827.50	1176.7	1176.4
CH.78	829.66	1176.6	1169.6

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	939.8	1307	1310
CH.39	943.1	1305	1317
CH.78	943.2	1303	1311

Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	991	1001	>25 kHz or >2/3 of the 20 dB BW

[Ant.2]


99 % BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	826.72	1177.5	1174.7
CH.39	831.18	1177.4	1170.4
CH.78	826.03	1177.1	1173.3

20 dB BW (kHz)			
Channel	GFSK	8DPSK	$\pi/4$ DQPSK
CH.0	943.1	1305	1289
CH.39	943.9	1304	1310
CH.78	942.1	1303	1310


Channel Separation(kHz)			Limit (kHz)
GFSK	8DPSK	$\pi/4$ DQPSK	
998	1001	1001	>25 kHz or >2/3 of the 20 dB BW

[Ant.1]


Test Plots (GFSK) Channel Separation

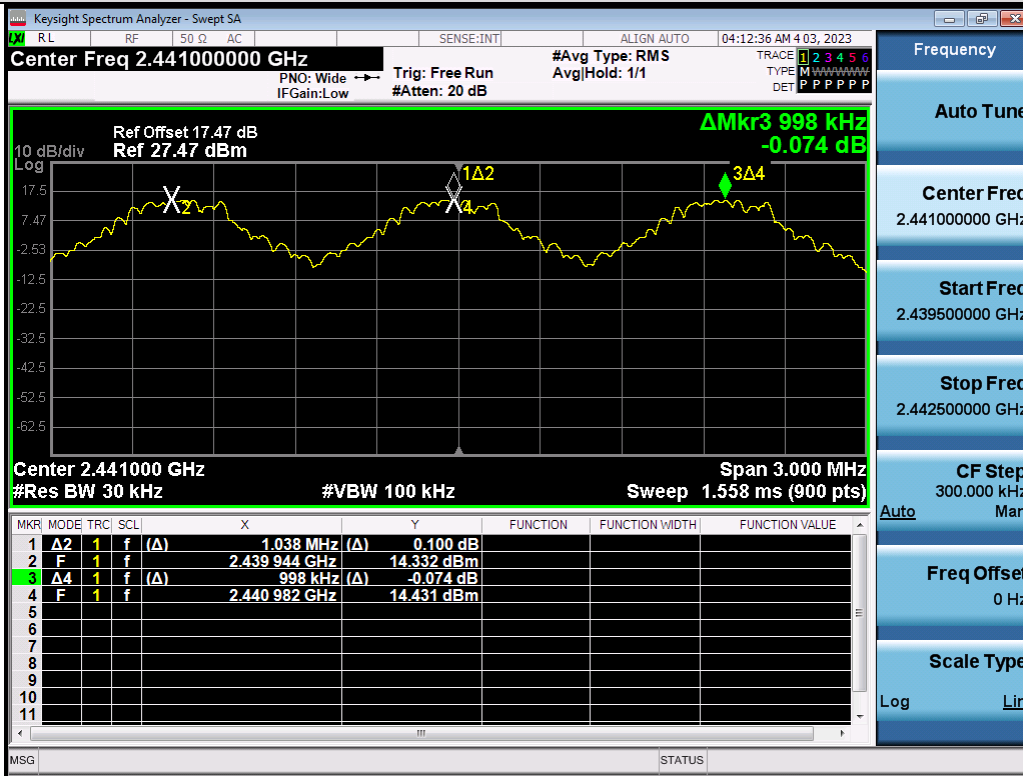

Test Plots (8DPSK) Channel Separation

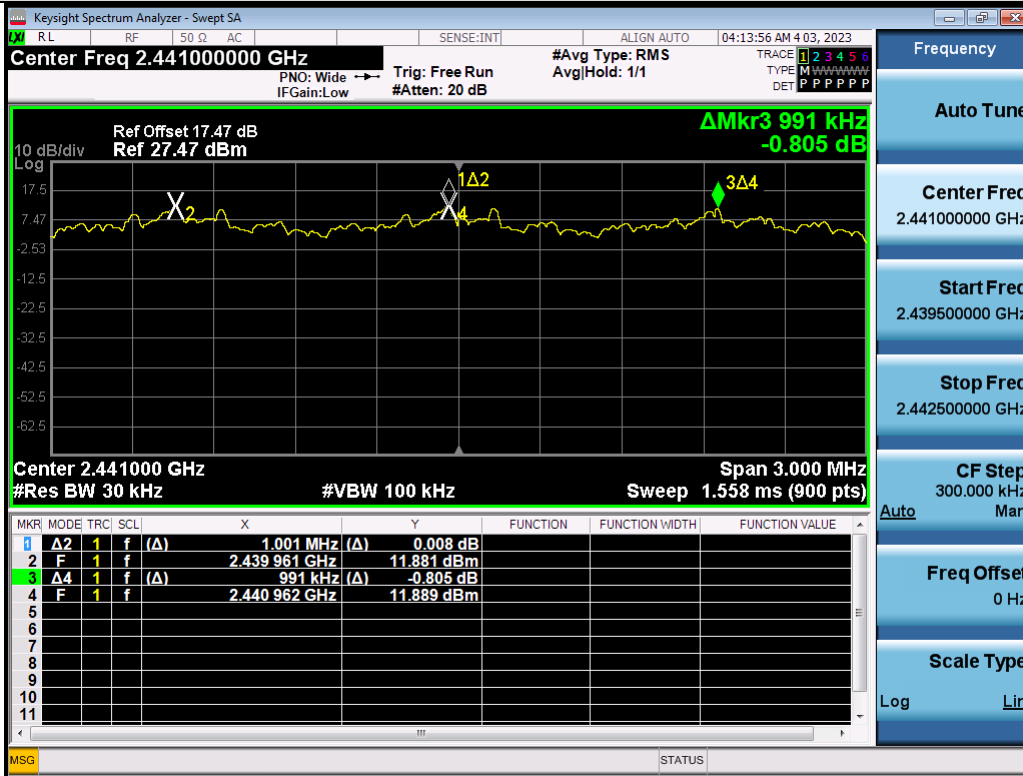


Test Plots ($\pi/4$ DQPSK) Channel Separation

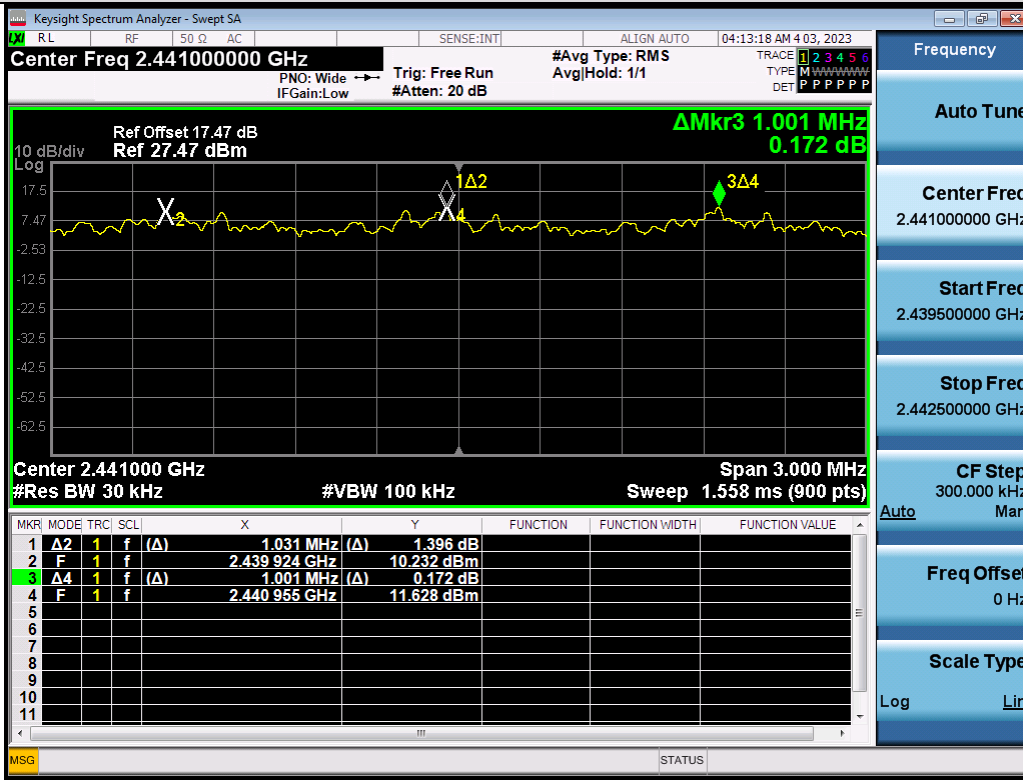


[Ant.1]


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

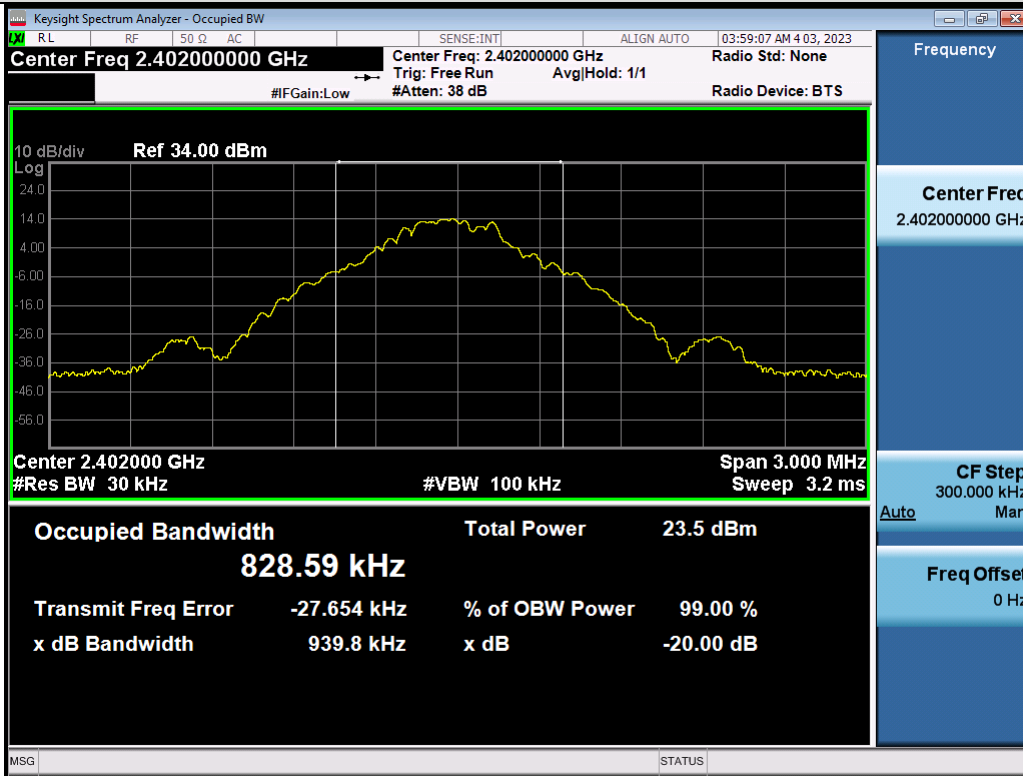


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)

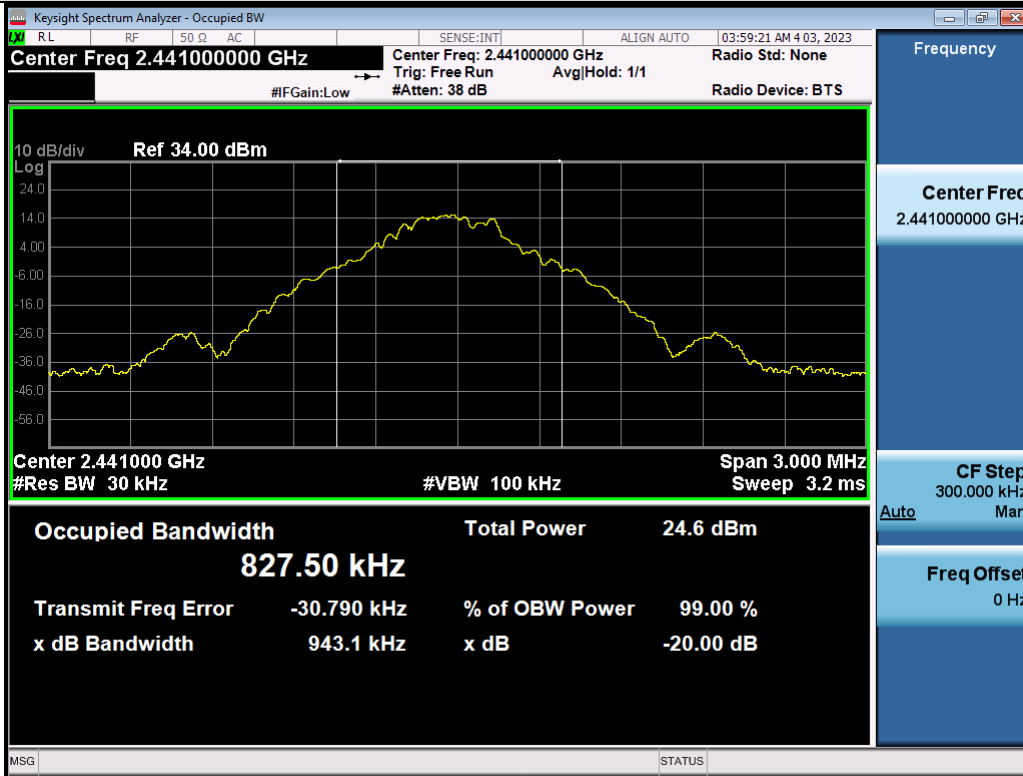

Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

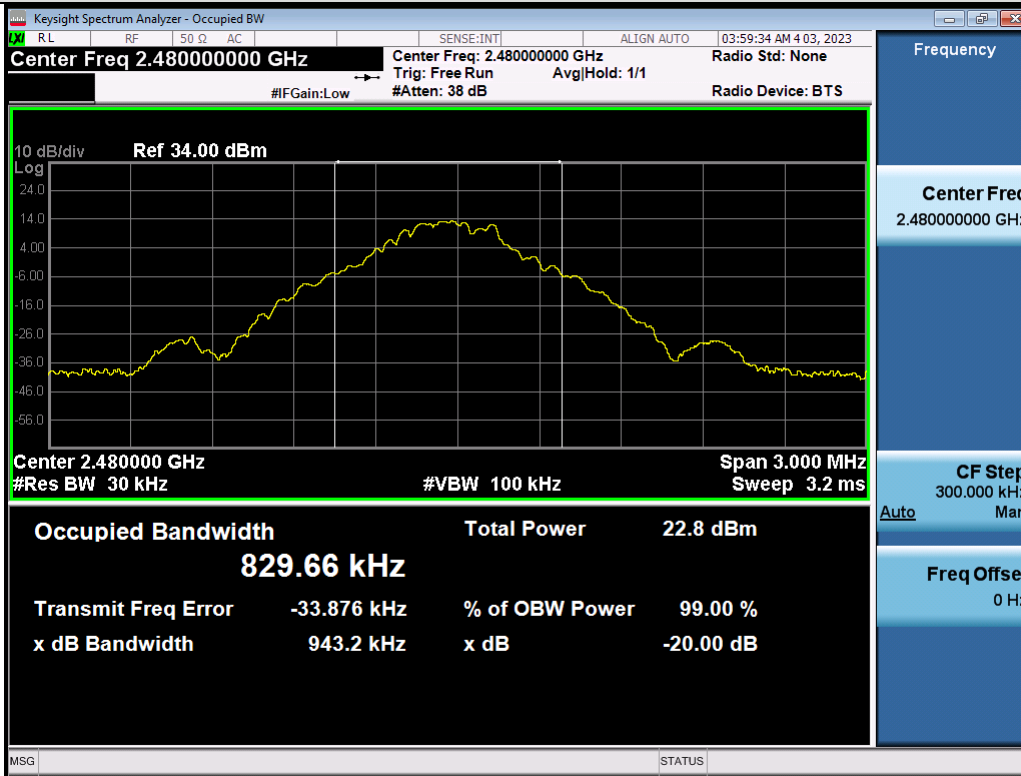


Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

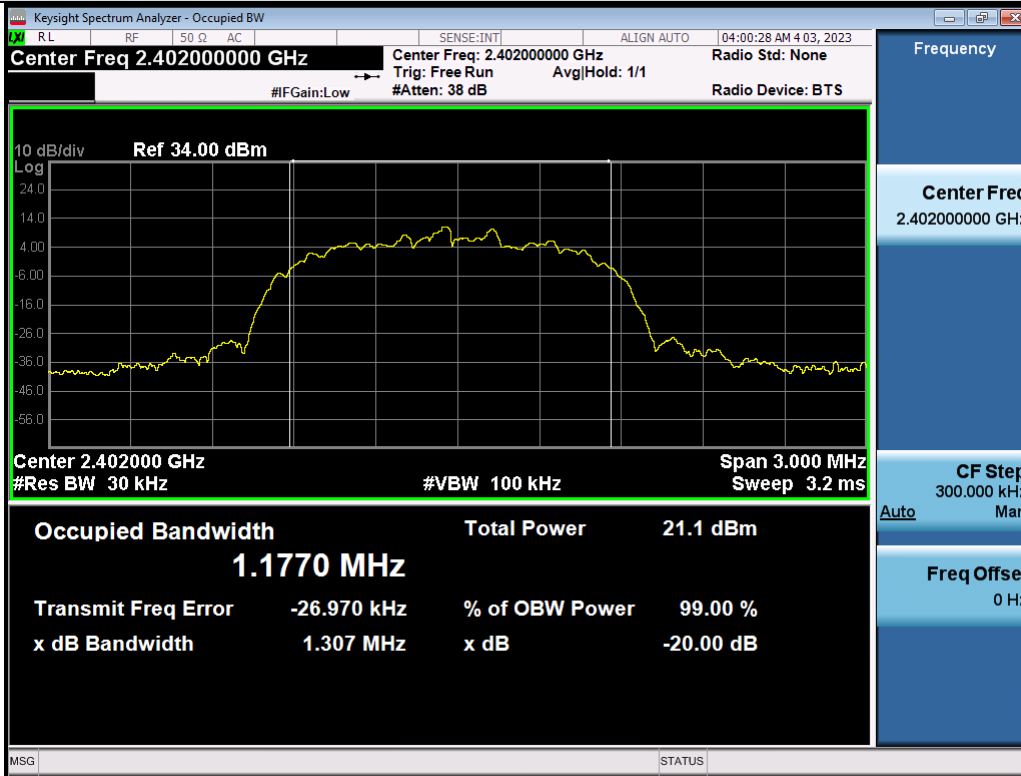


Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)




Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

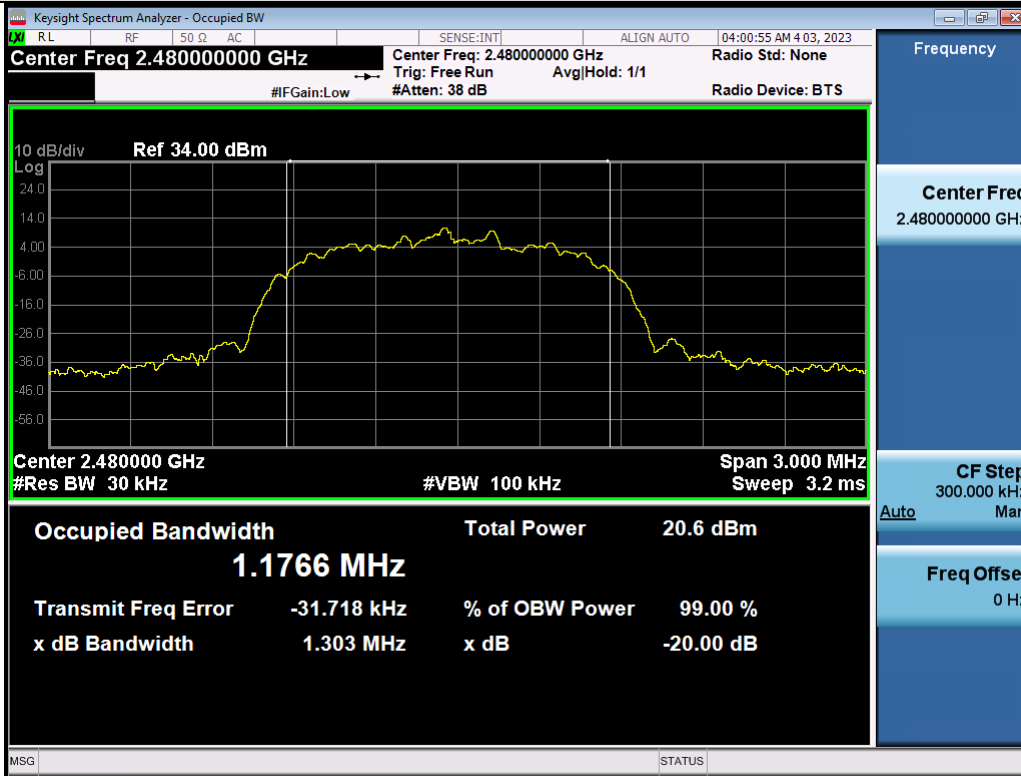


Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

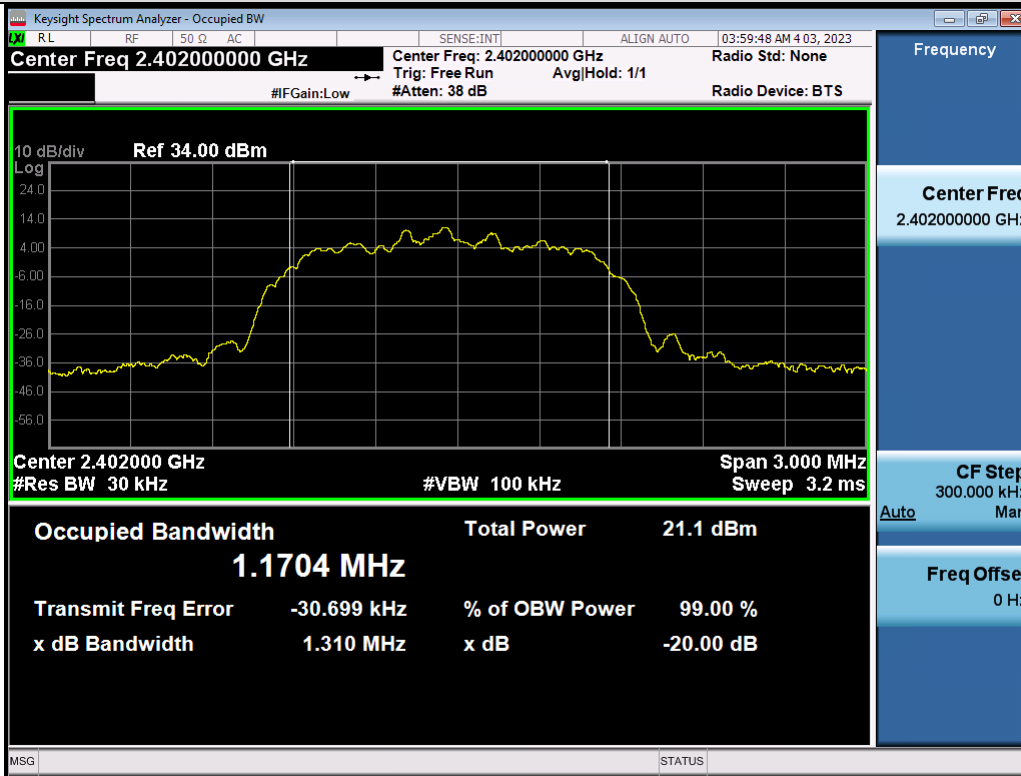

Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)

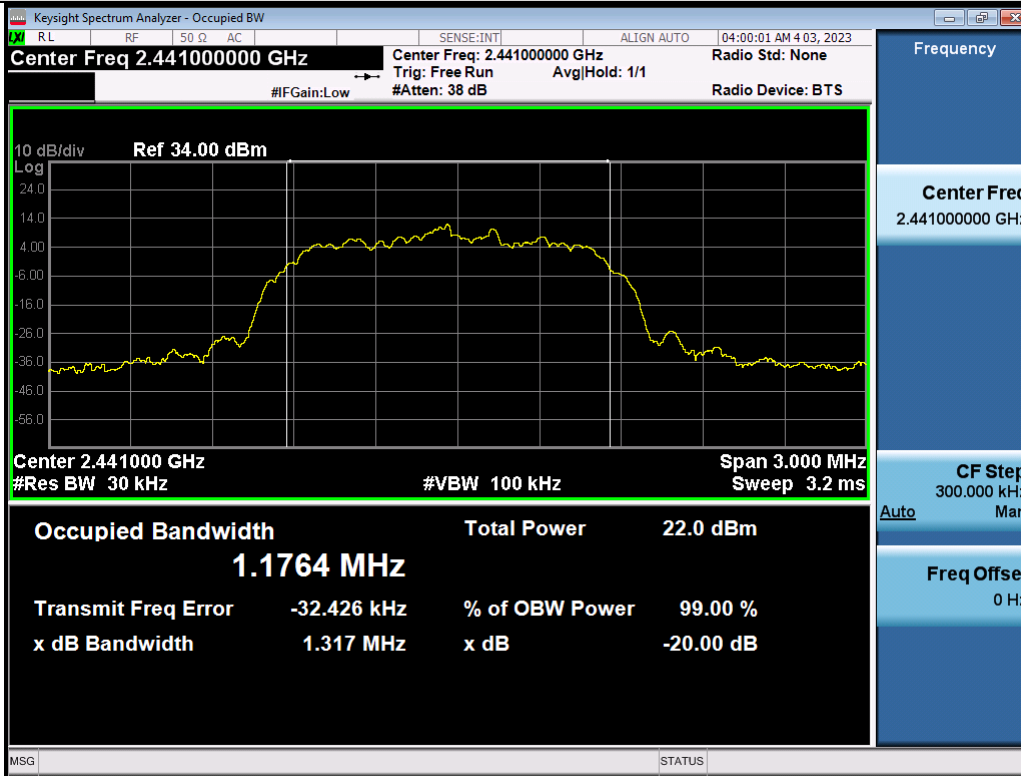


Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

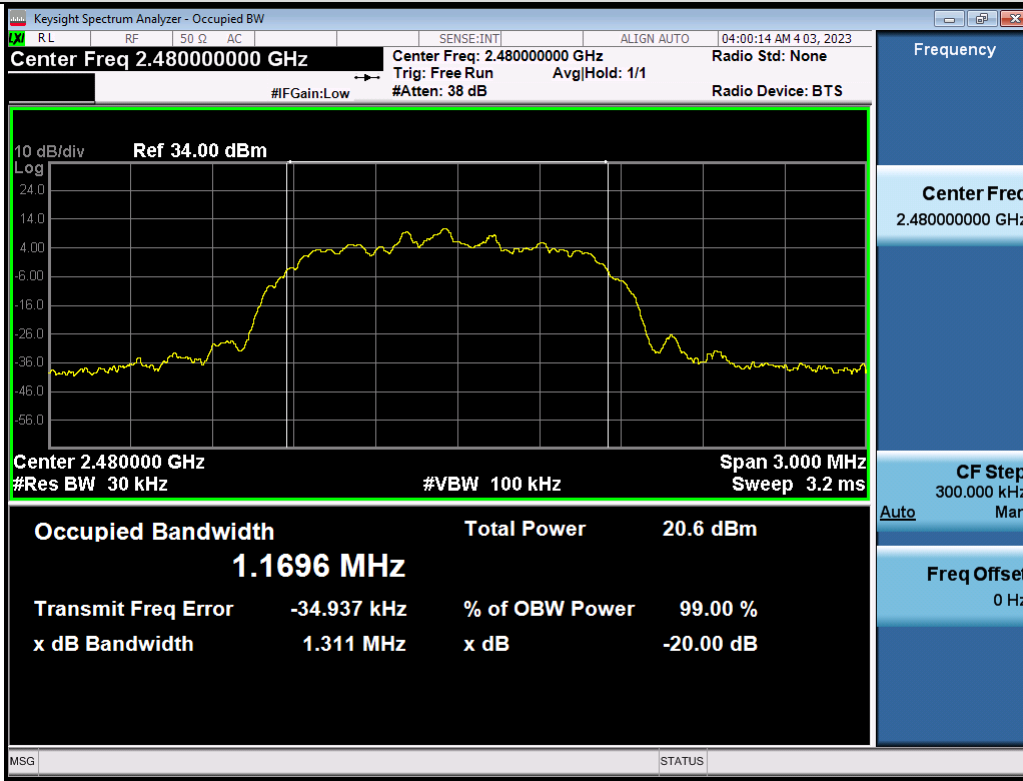


[Ant.2]


Test Plots (GFSK) Channel Separation

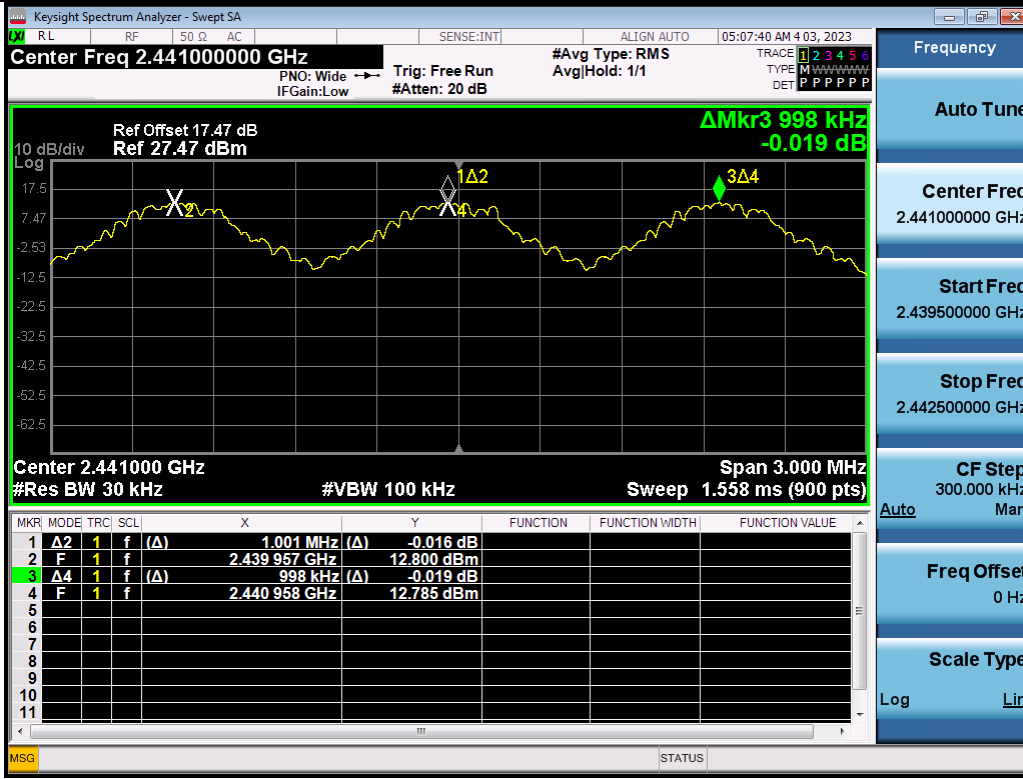

Test Plots (8DPSK) Channel Separation

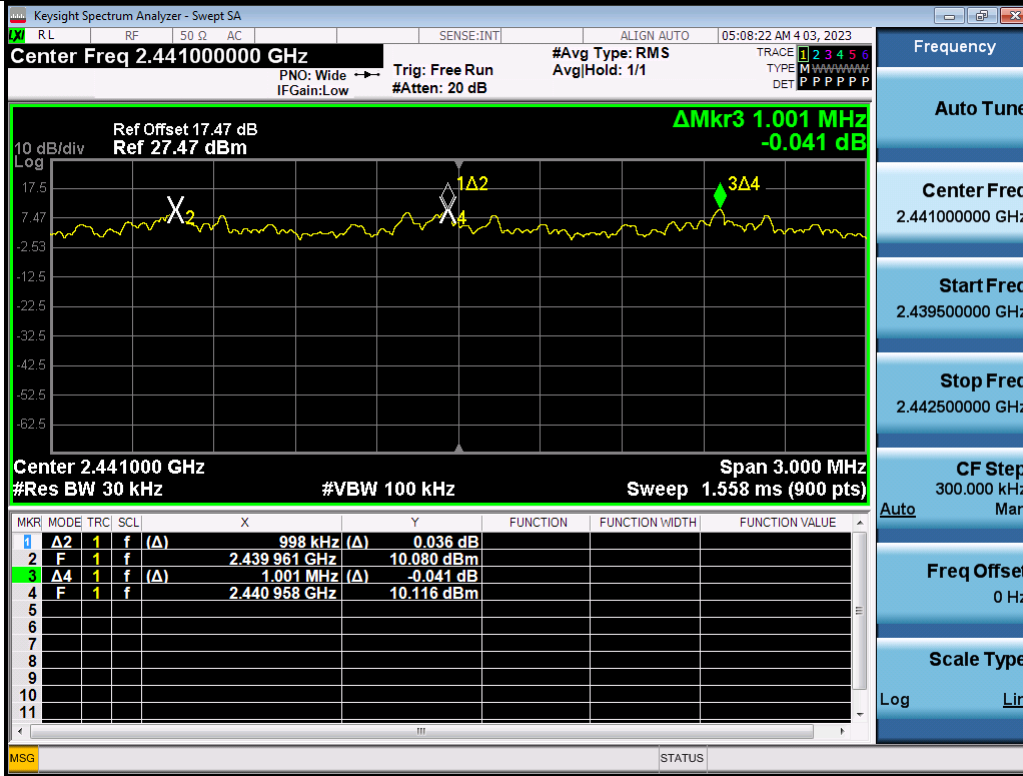


Test Plots ($\pi/4$ DQPSK) Channel Separation

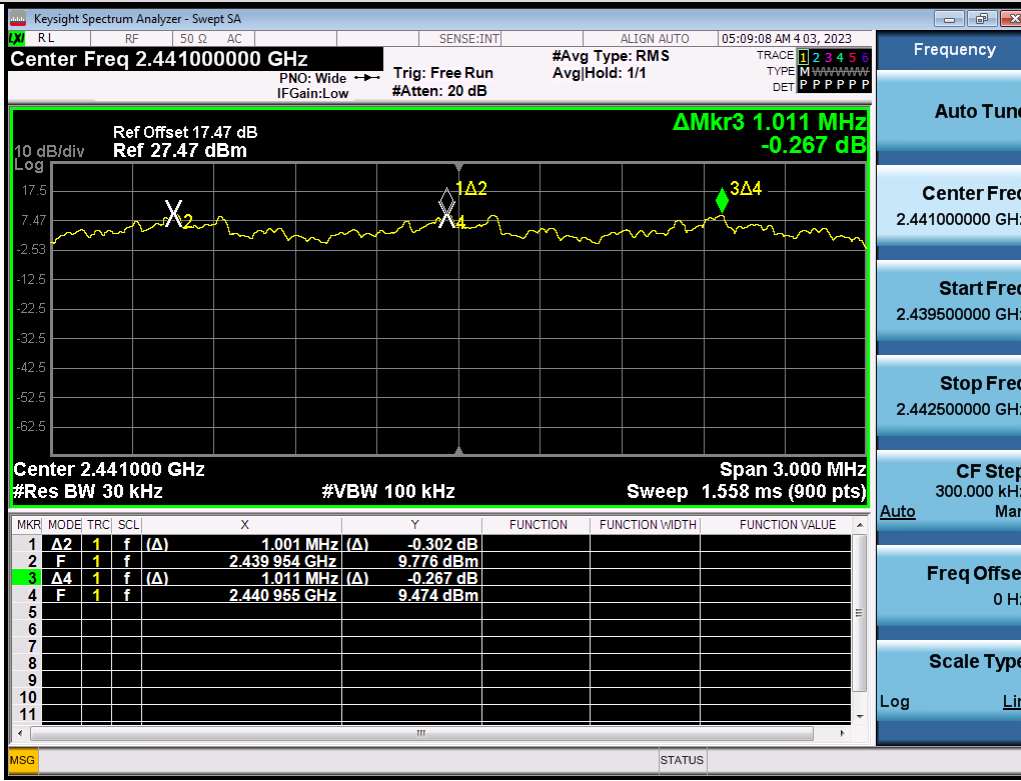


[Ant.2]


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

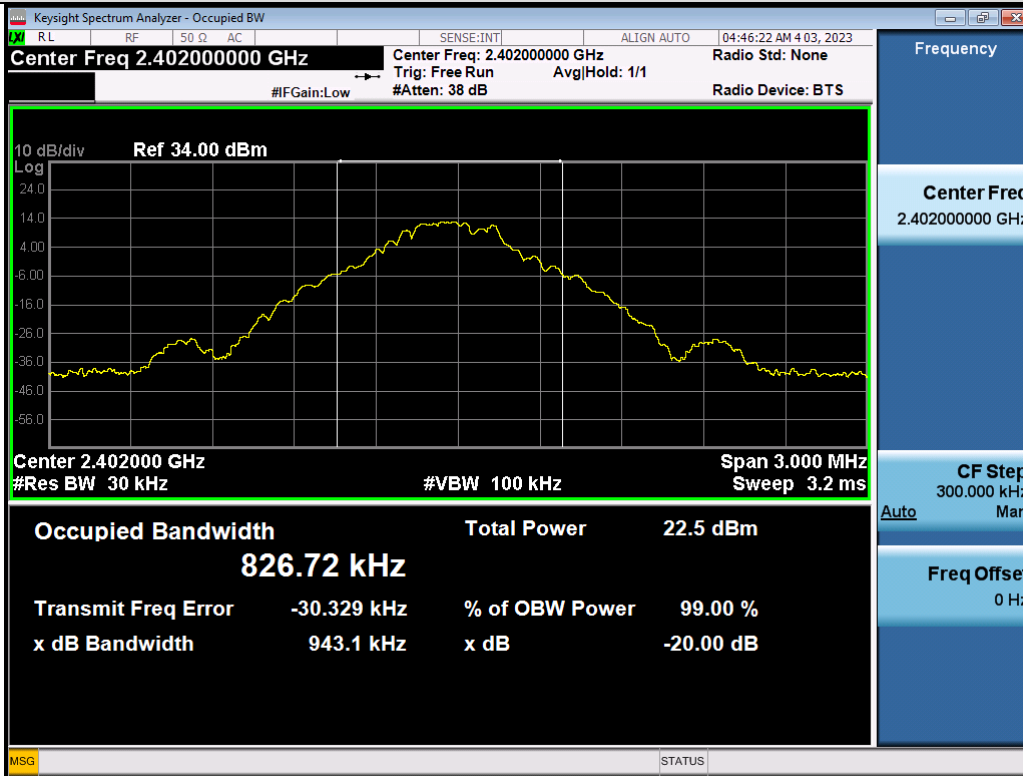


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)

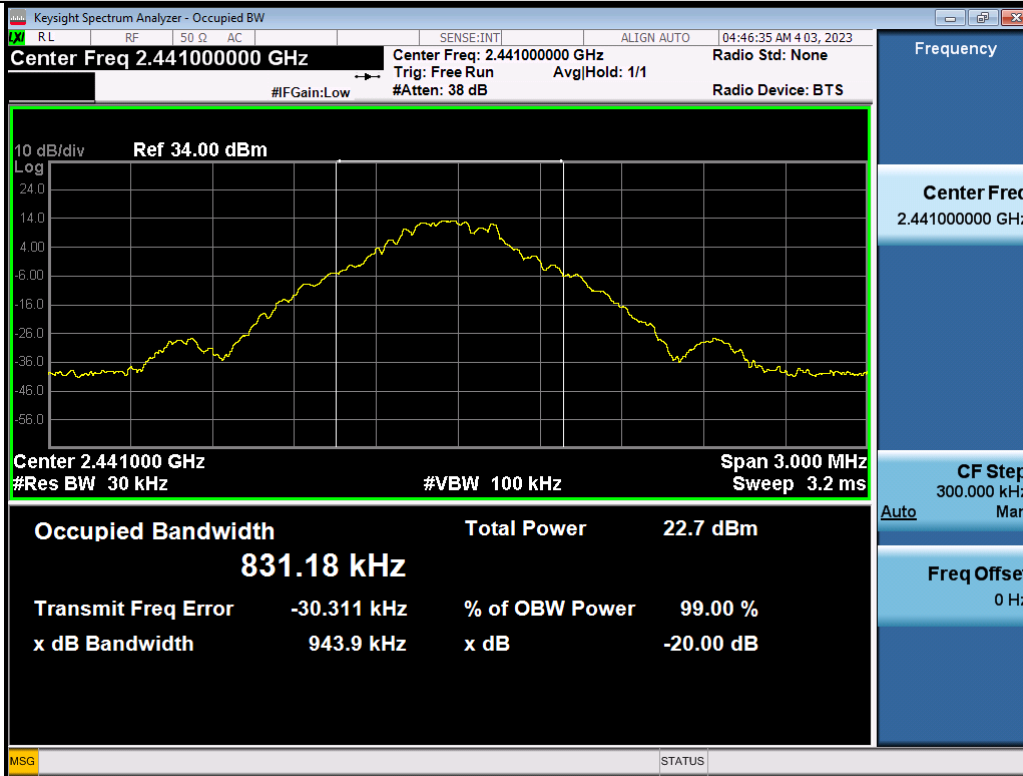


Test Plots (GFSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

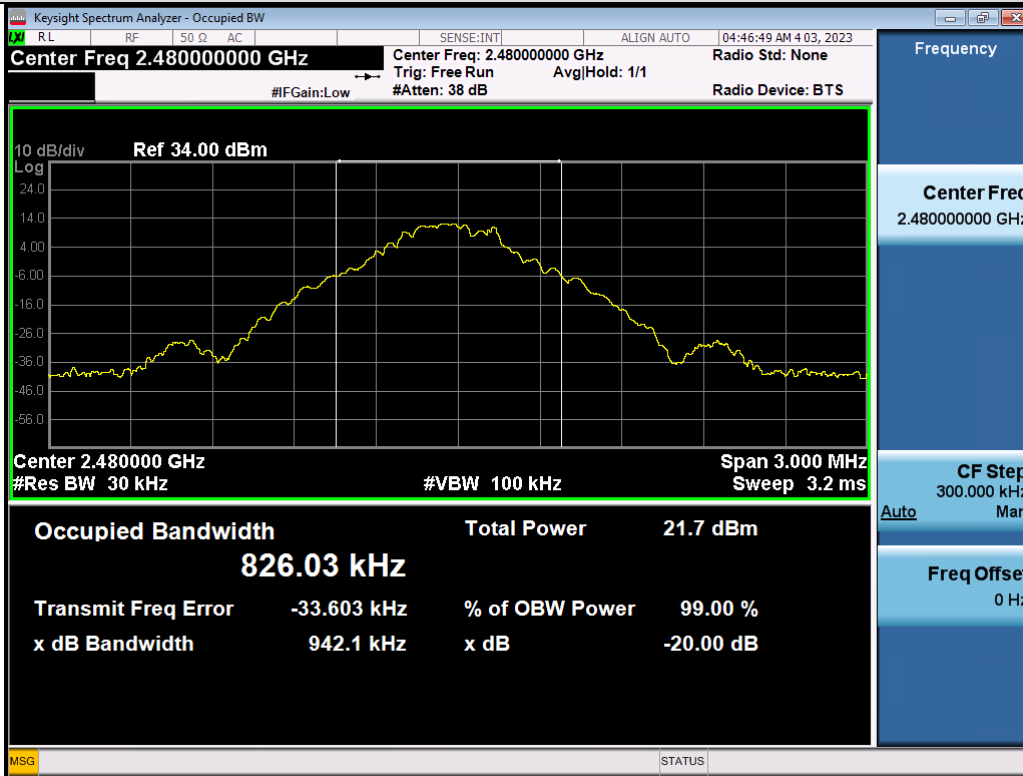


Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

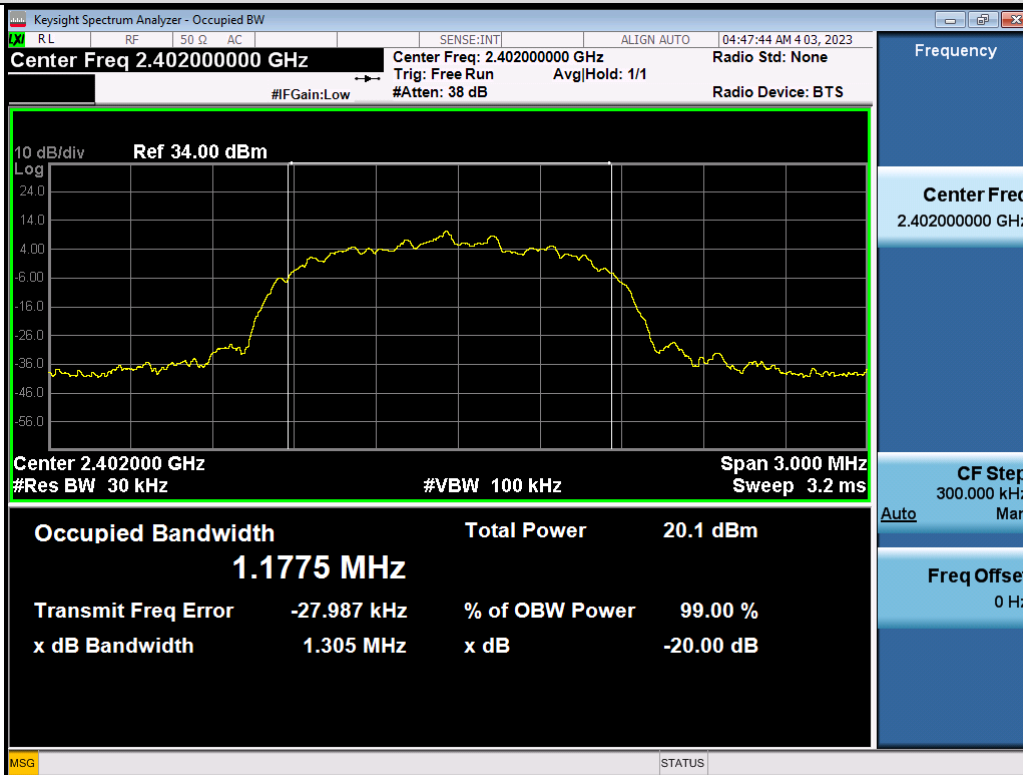


Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)

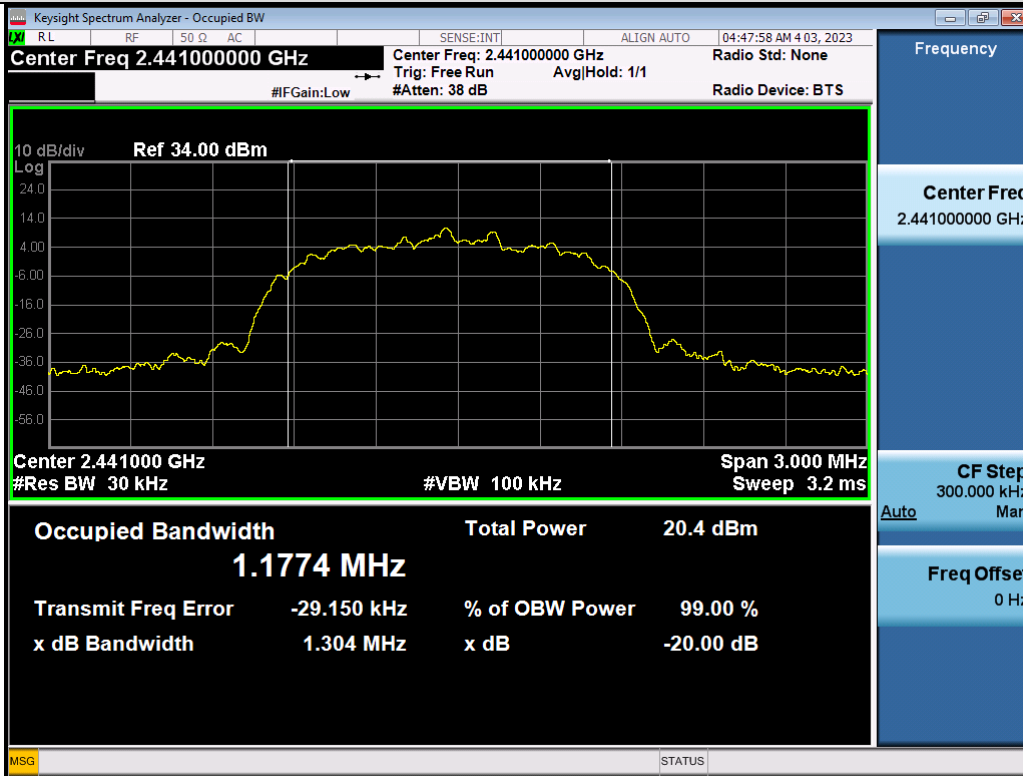


Test Plots (8DPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

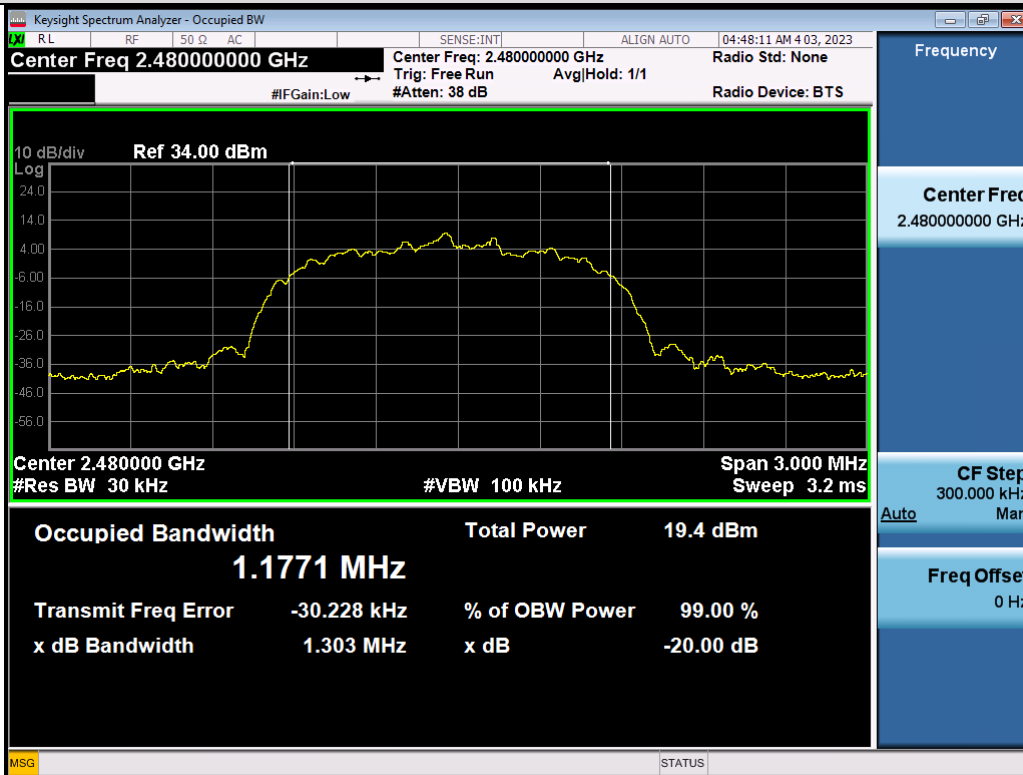


Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.0)

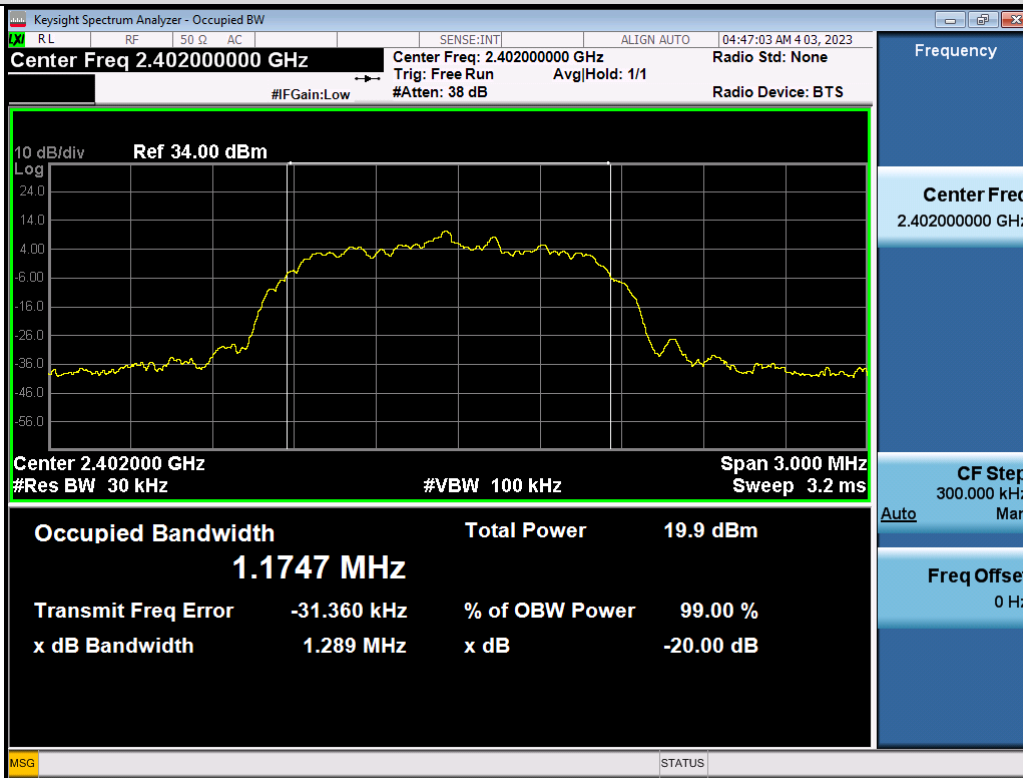

Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.39)

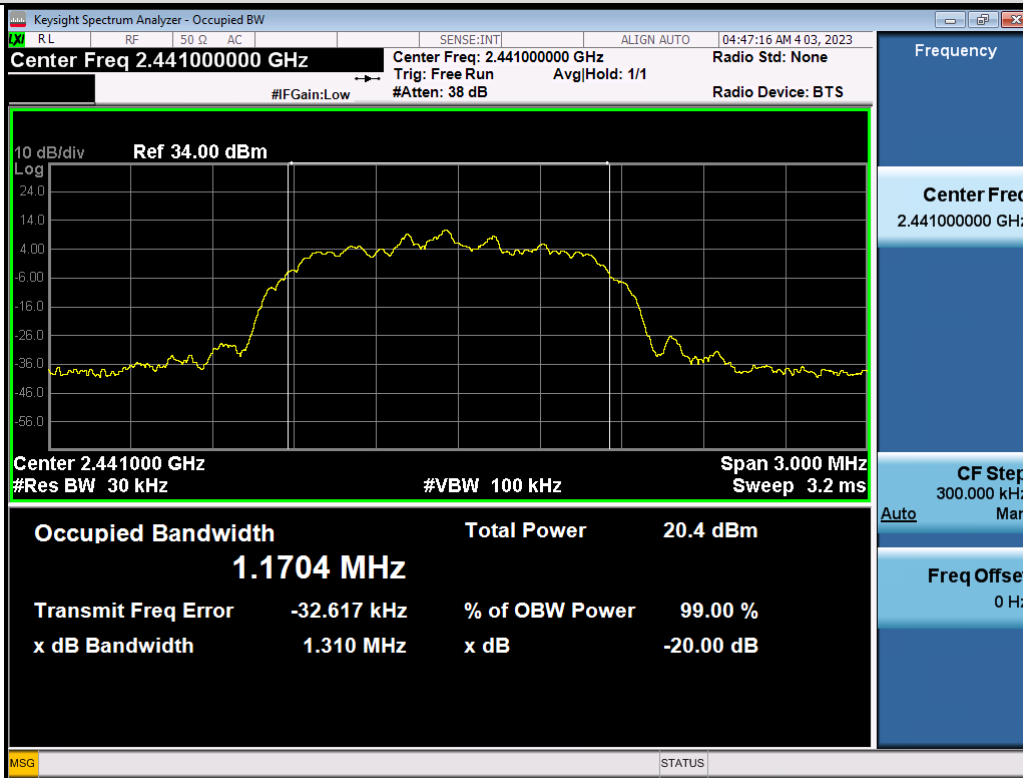

Test Plots ($\pi/4$ DQPSK) 20 dB Bandwidth & Occupied Bandwidth (CH.78)

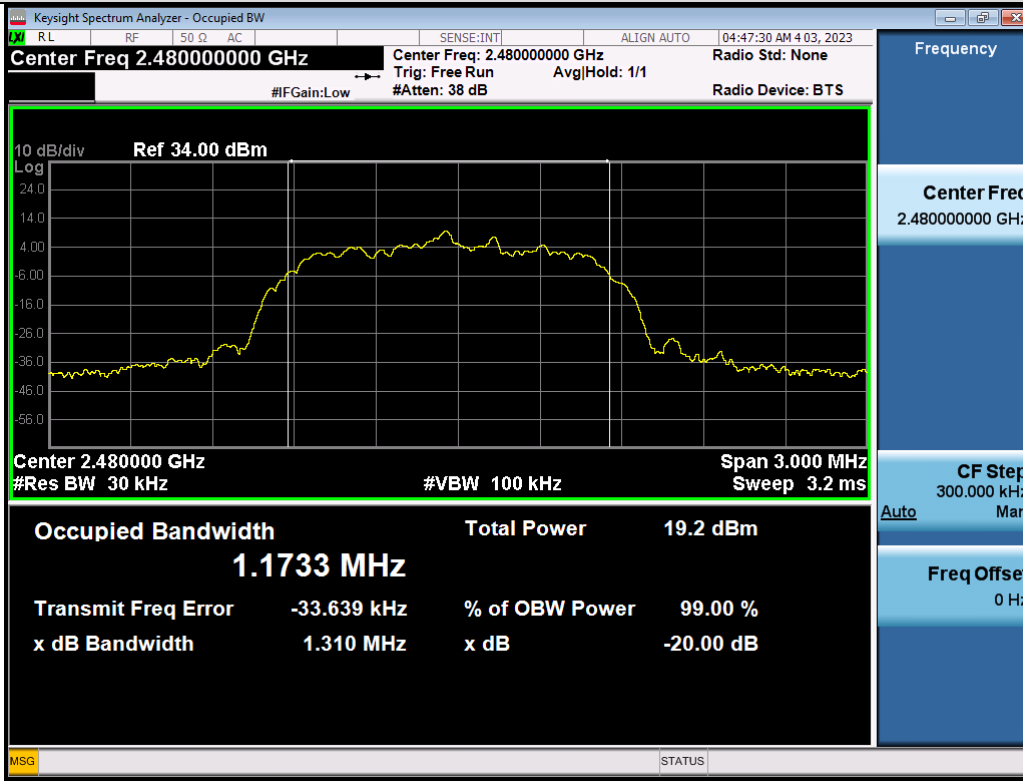

10.4 NUMBER OF HOPPING FREQUENCY

[Ant.1]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15


[Ant.2]

Result (No. of CH)			Limit
GFSK	8DPSK	$\pi/4$ DQPSK	
79	79	79	>15


Note :

In case of AFH mode, minimum number of hopping channels is 20.

■ TEST PLOTS [ANT1]

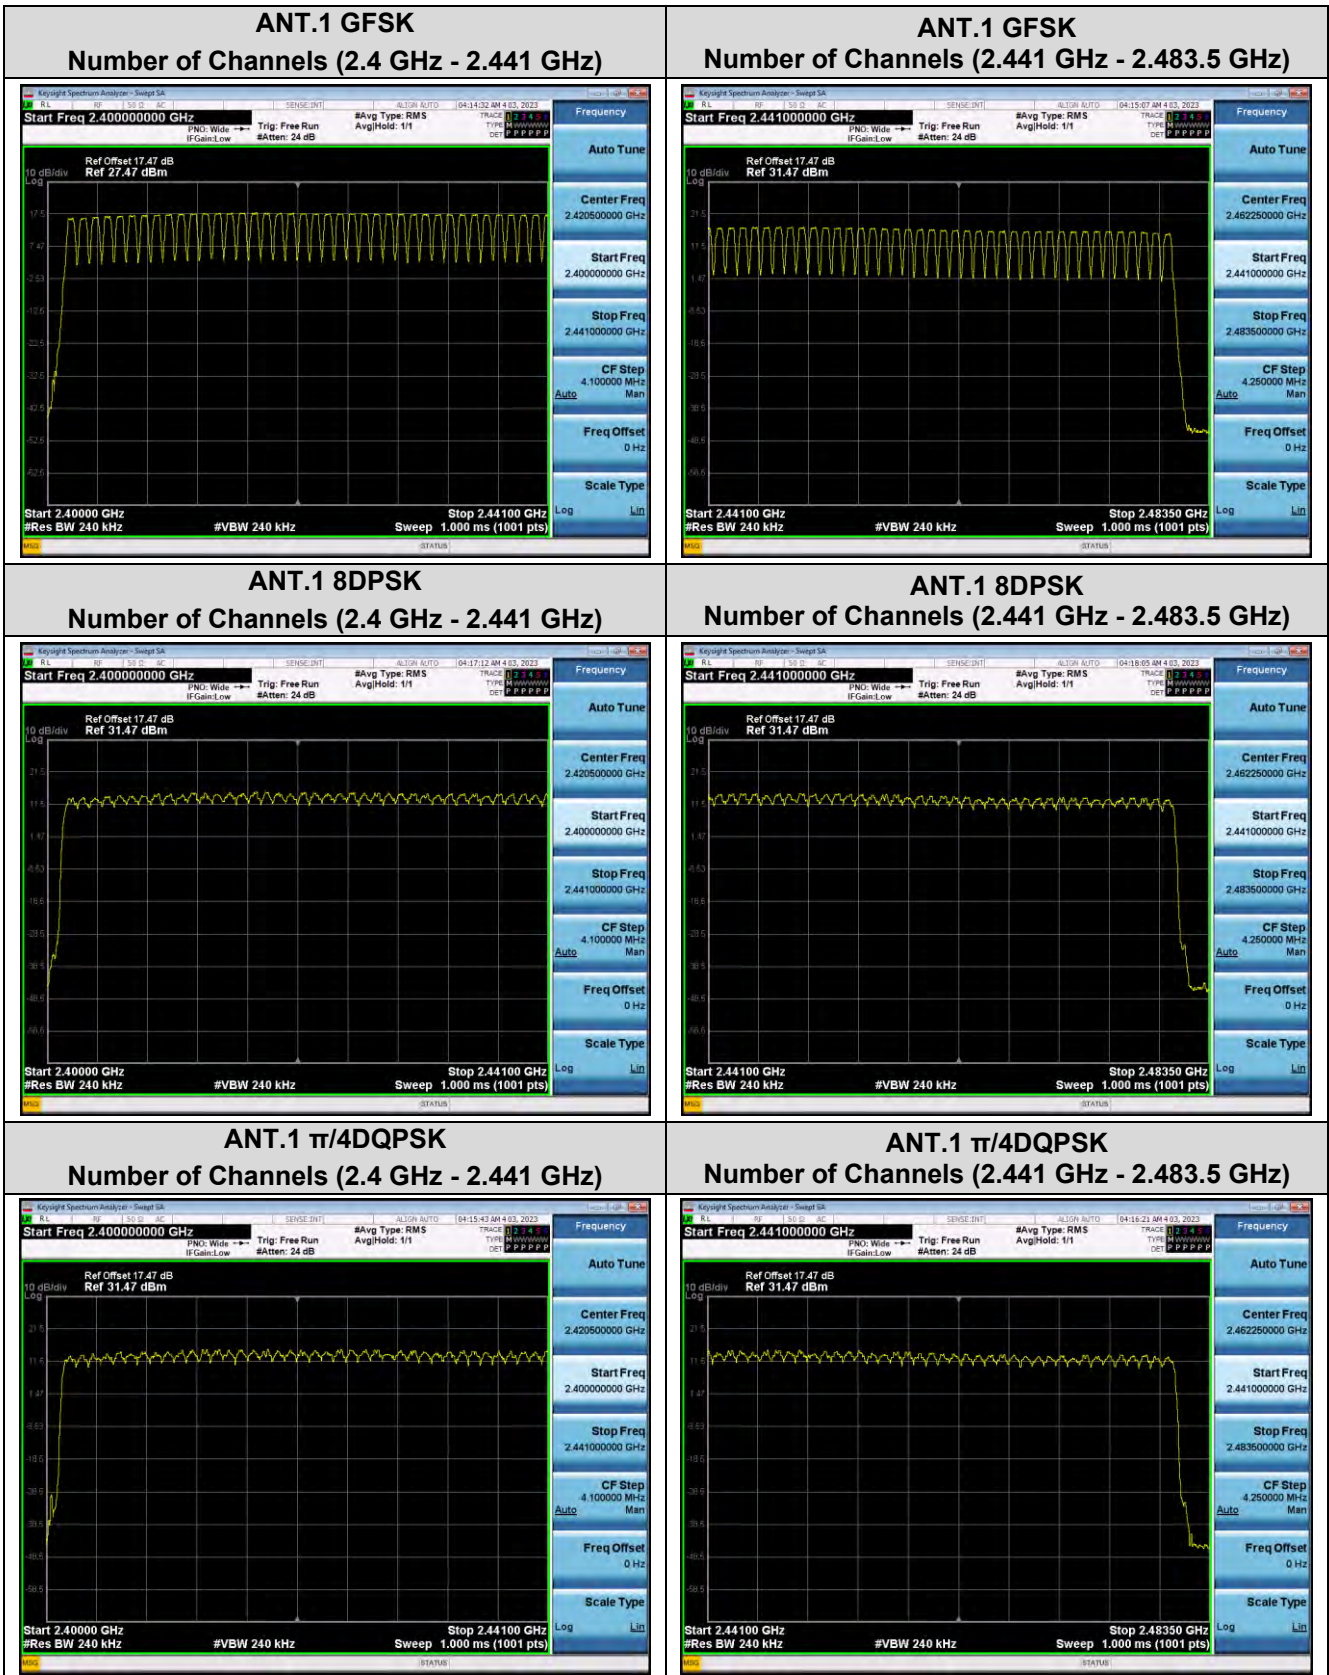

■ TEST PLOTS [ANT2]

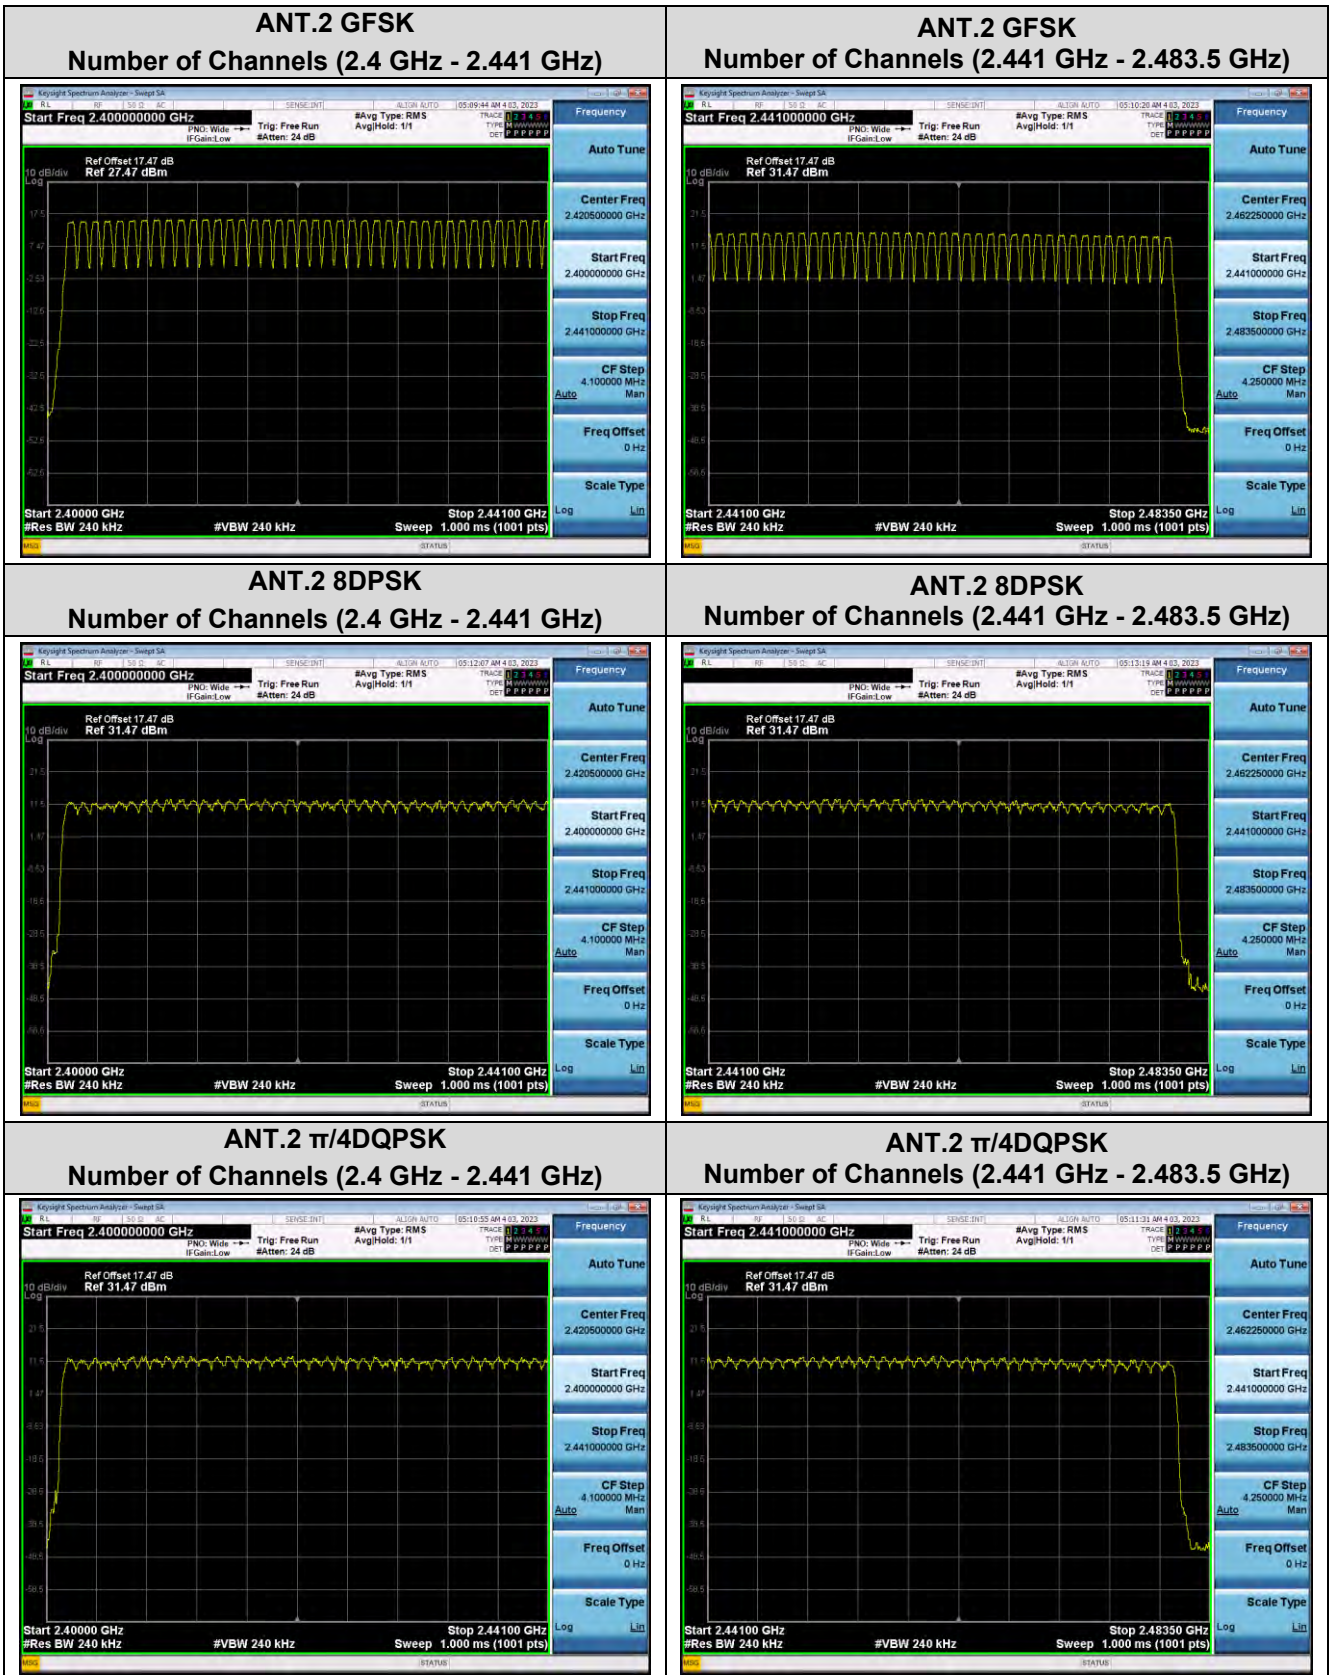

10.5 TIME OF OCCUPANCY (DWELL TIME)

[Ant.1]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.885	2.890	2.885
	Mid	2.880	2.885	2.885
	High	2.885	2.890	2.885

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.73	308.27	307.73	31.6	
	Mid	307.20	307.73	307.73	31.6	
	High	307.73	308.27	307.73	31.6	

AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.87	154.13	153.87	8.0	
	Mid	153.60	153.87	153.87	8.0	
	High	153.87	154.13	153.87	8.0	

[Ant.2]

Pulse Time (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK
	Low	2.885	2.890	2.885
	Mid	2.885	2.890	2.885
	High	2.885	2.885	2.885

Non-AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	307.73	308.27	307.73	31.6	400
	Mid	307.73	308.27	307.73	31.6	
	High	307.73	307.73	307.73	31.6	


AFH Mode

Total of Dwell (ms)	Channel	GFSK	8DPSK	$\pi/4$ DQPSK	Period Time (s)	Limit (ms)
	Low	153.87	154.13	153.87	8.0	400
	Mid	153.87	154.13	153.87	8.0	
	High	153.87	153.87	153.87	8.0	

[Ant.1]


Test Plots (GFSK)

Dwell Time (CH.0)

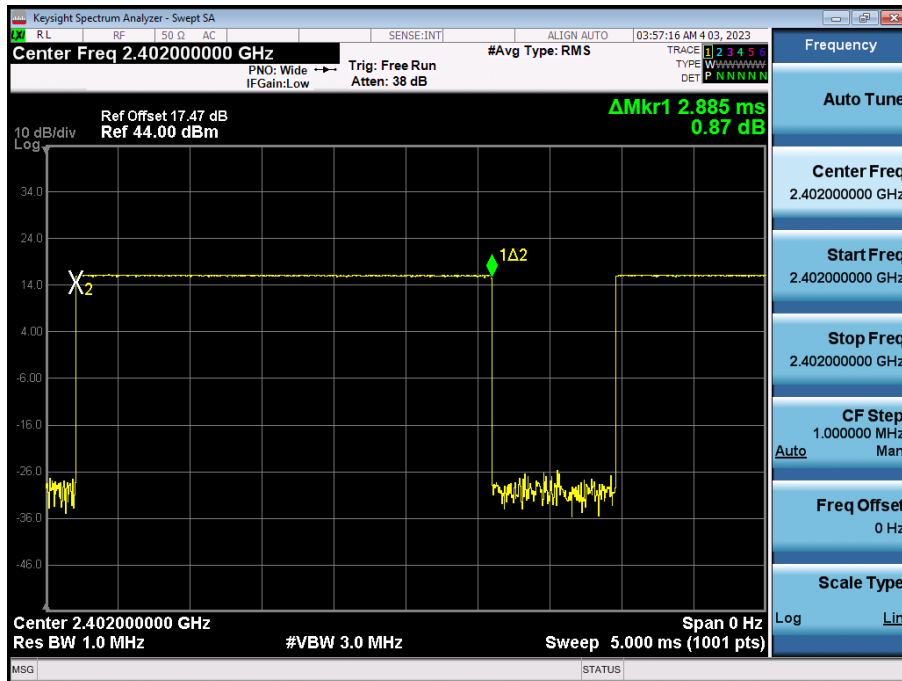


Test Plots (GFSK)


Dwell Time (CH.39)

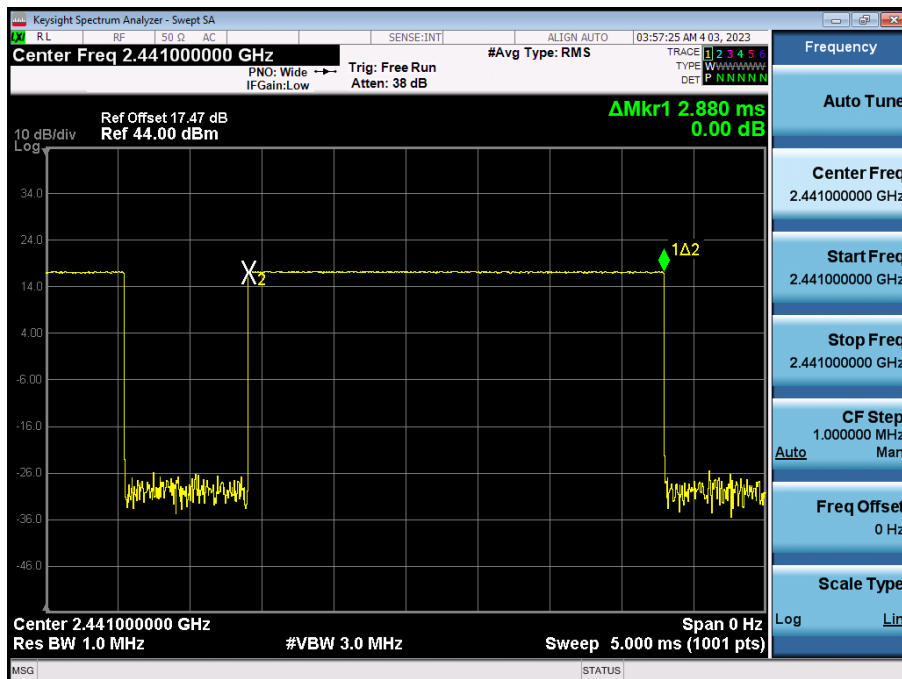


Test Plots (GFSK)
Dwell Time (CH.78)

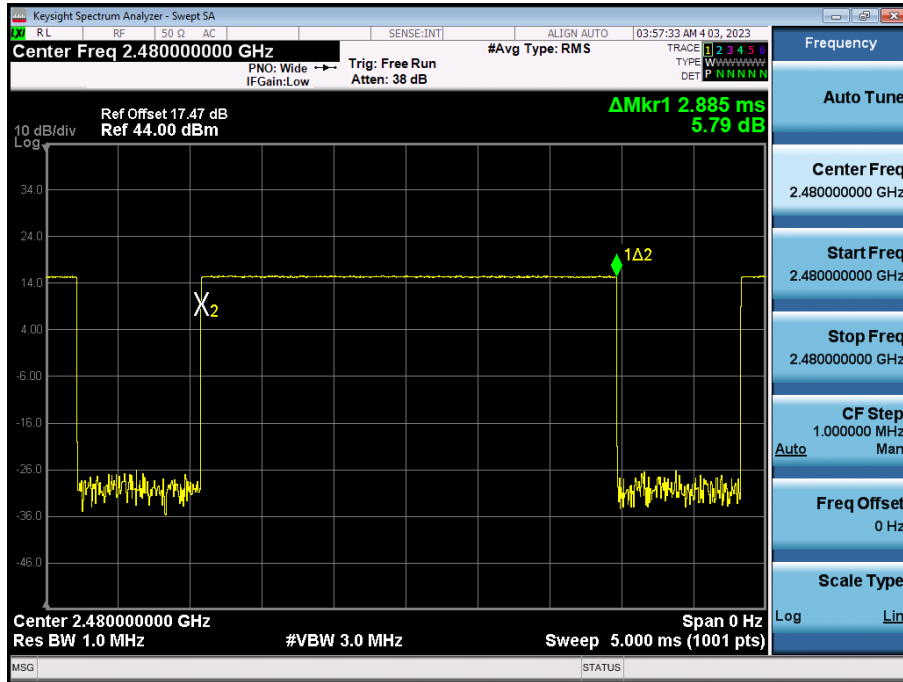


Test Plots (8DPSK)
Dwell Time (CH.0)

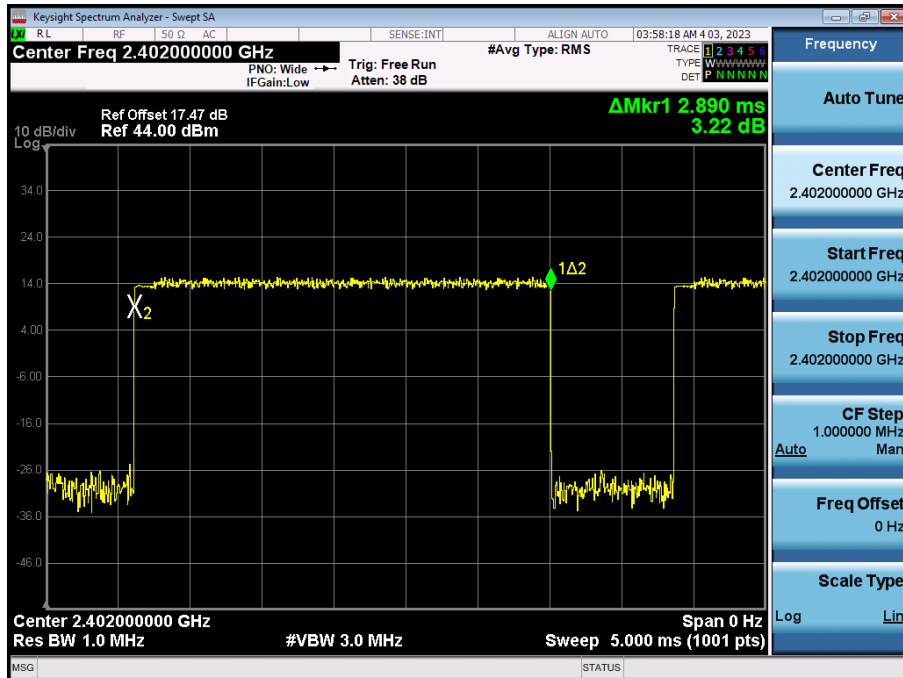

Test Plots (8DPSK)
Dwell Time (CH.39)

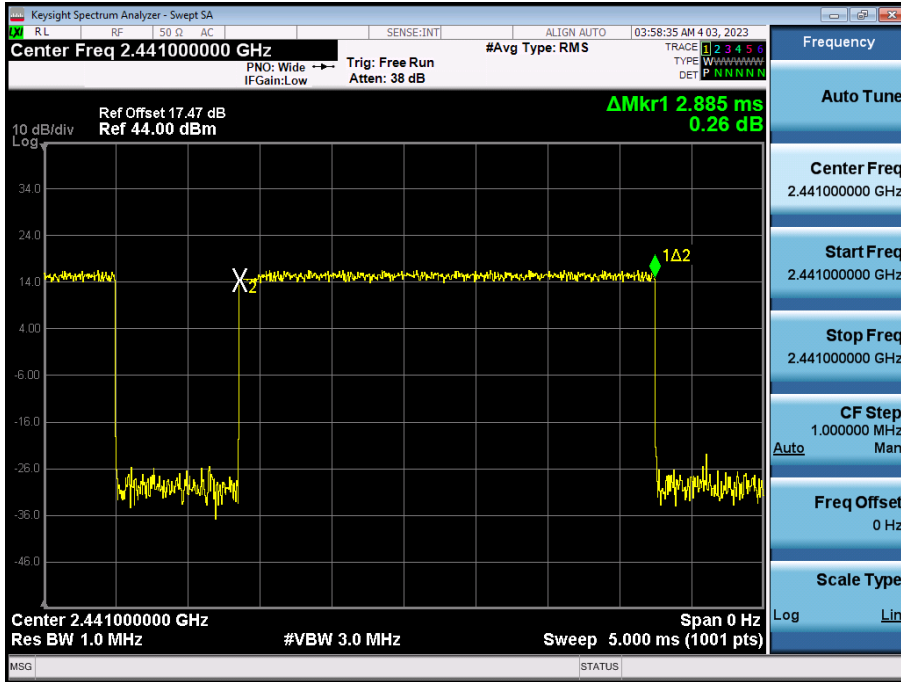


Test Plots (8DPSK)
Dwell Time (CH.78)

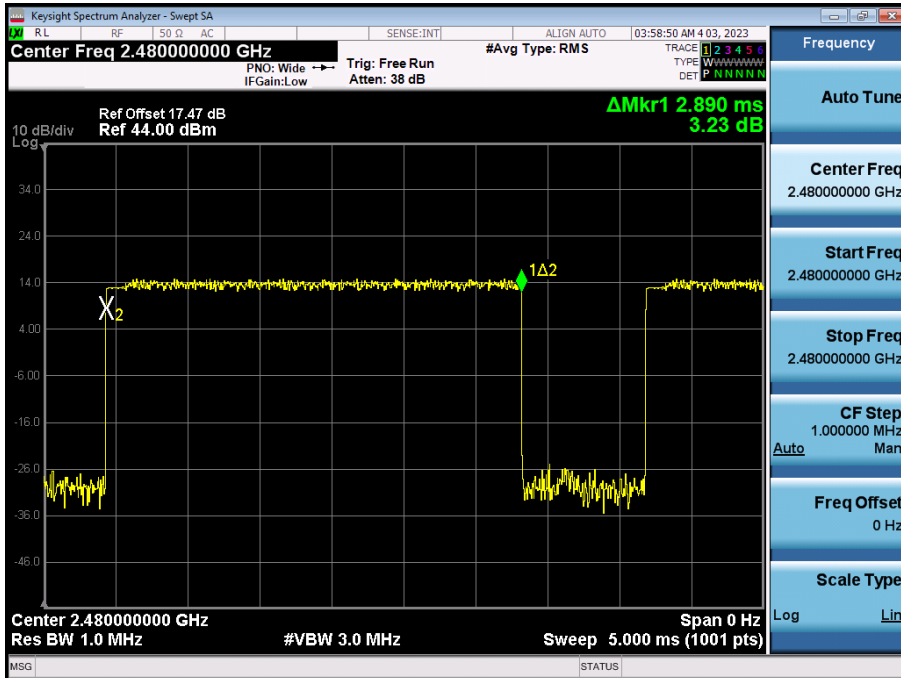


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

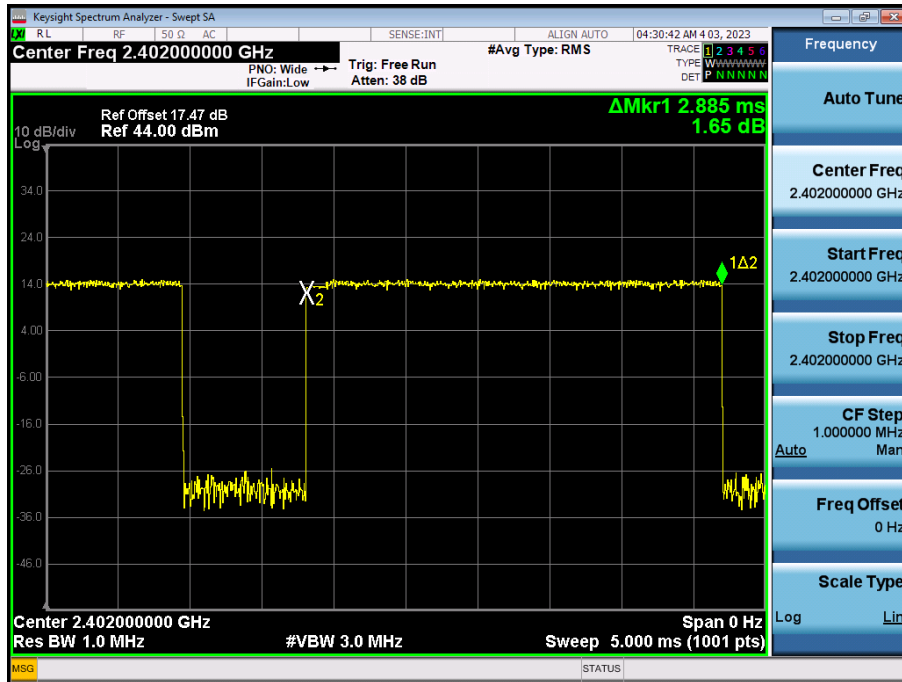


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

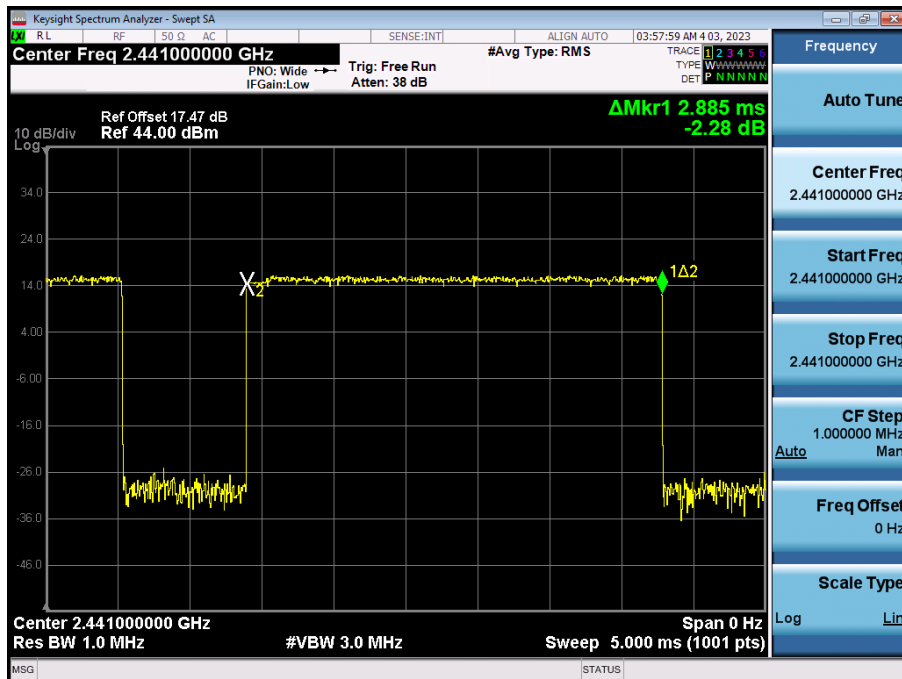

Test Plots ($\pi/4$ DQPSK)


Dwell Time (CH.78)

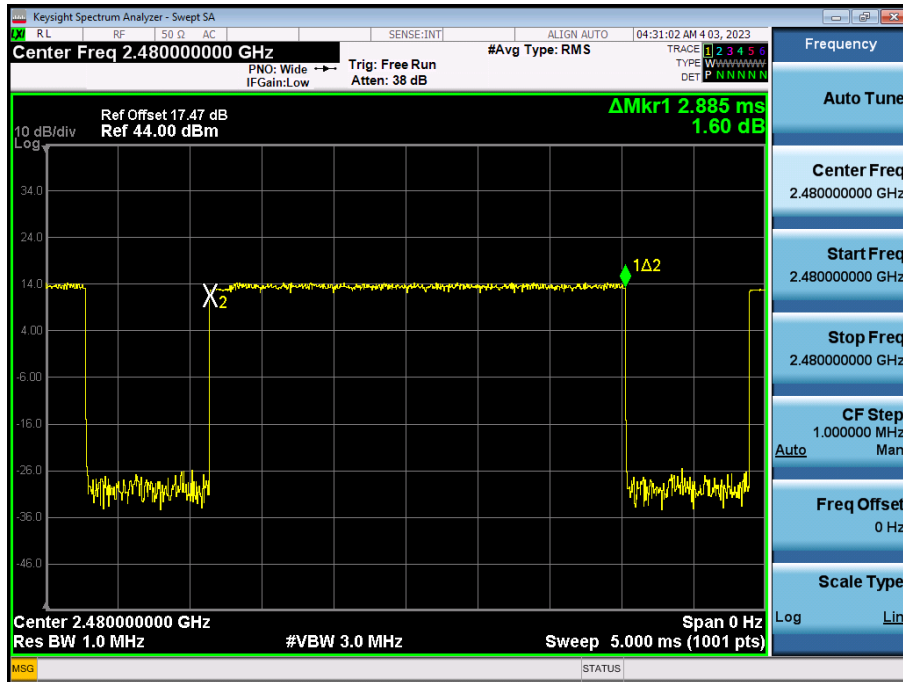

[Ant.2]


Test Plots (GFSK)

Dwell Time (CH.0)

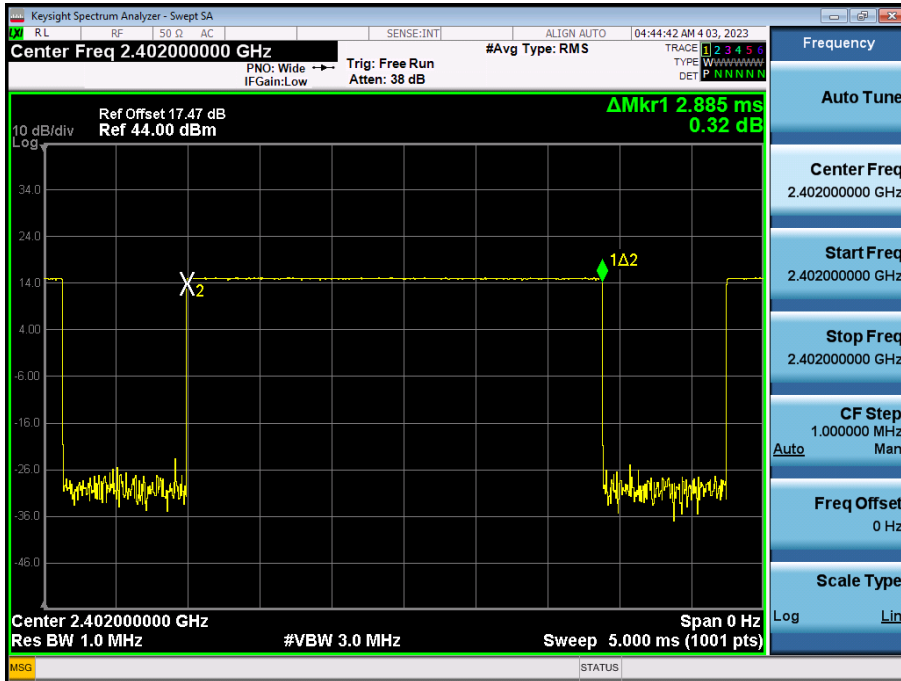


Test Plots (GFSK)


Dwell Time (CH.39)

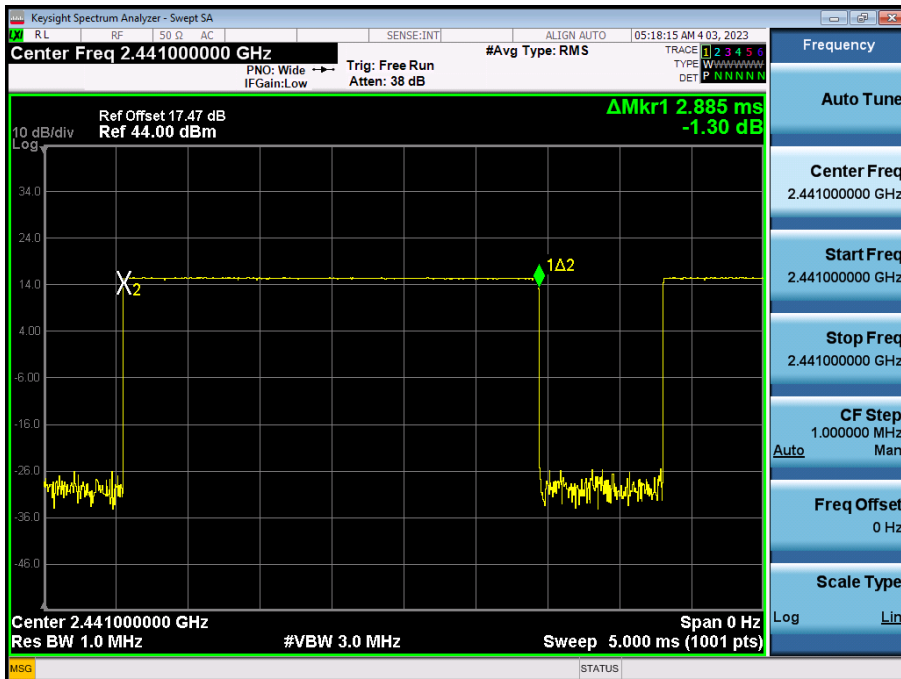

Test Plots (GFSK)
Dwell Time (CH.78)

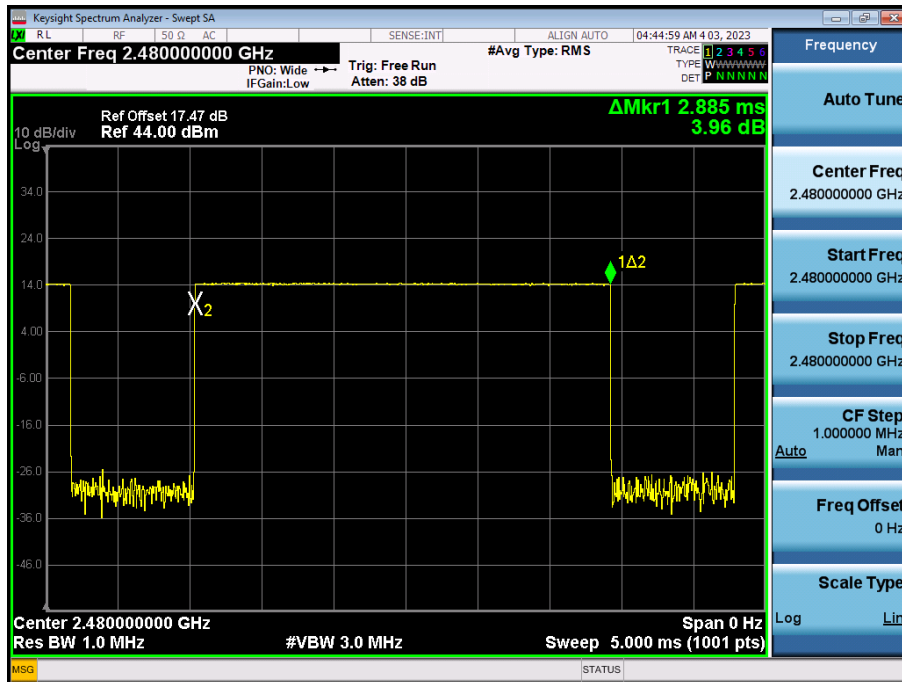


Test Plots (8DPSK)
Dwell Time (CH.0)

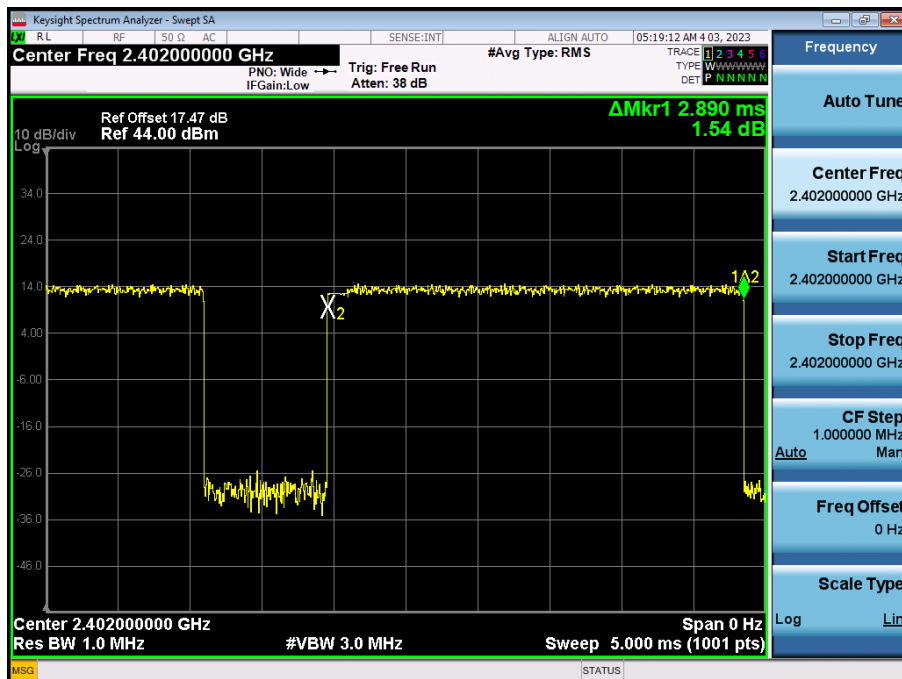


Test Plots (8DPSK)

Dwell Time (CH.39)

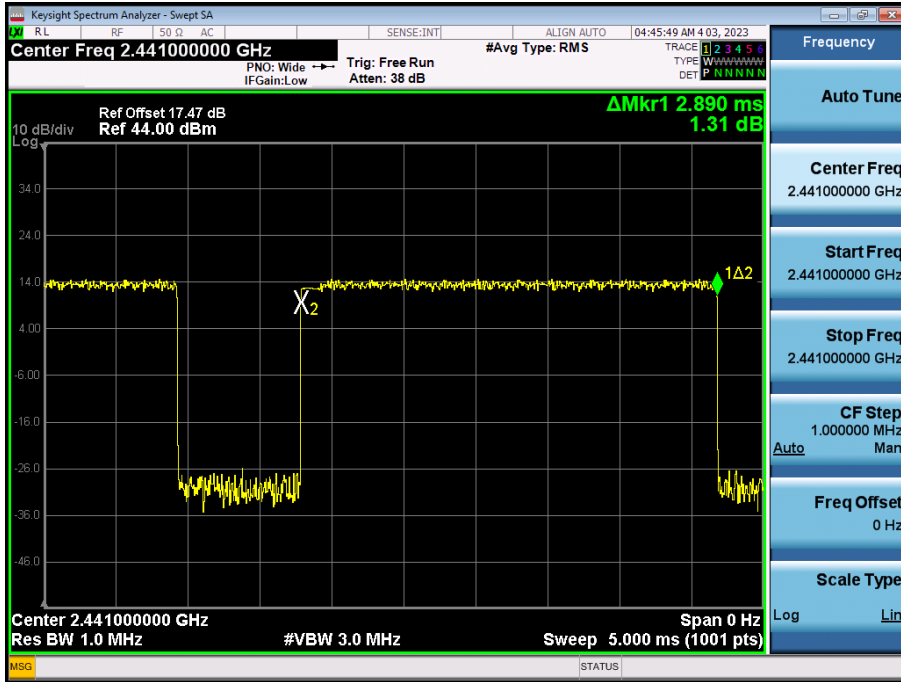


Test Plots (8DPSK)

Dwell Time (CH.78)

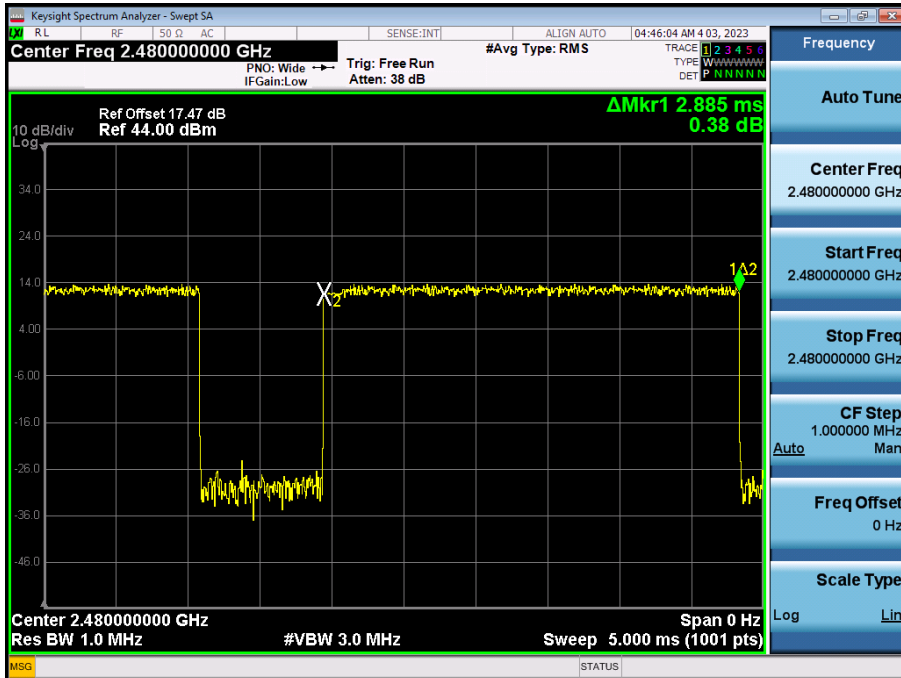


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.0)

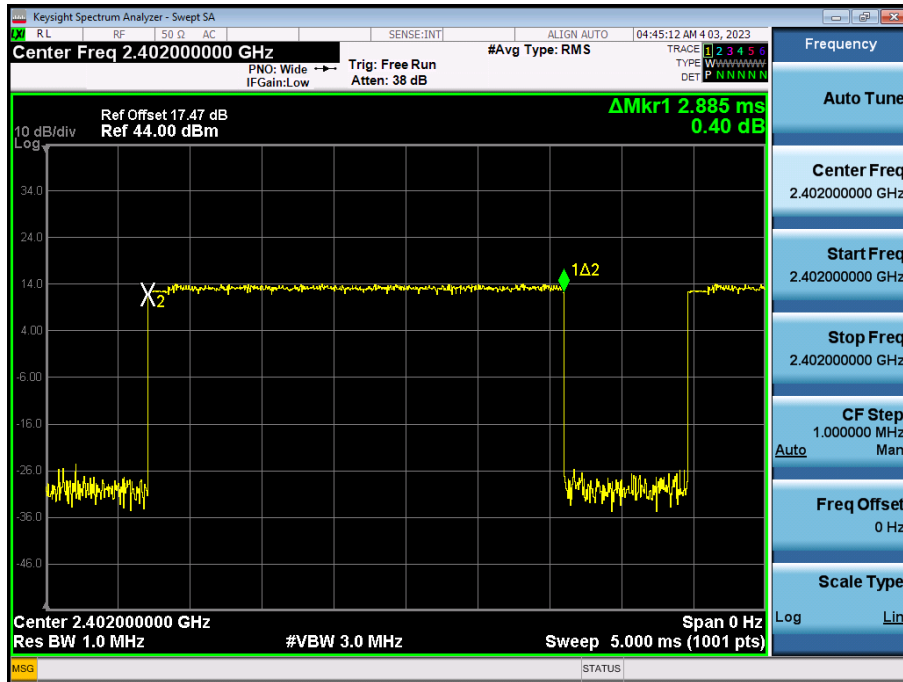


Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.39)

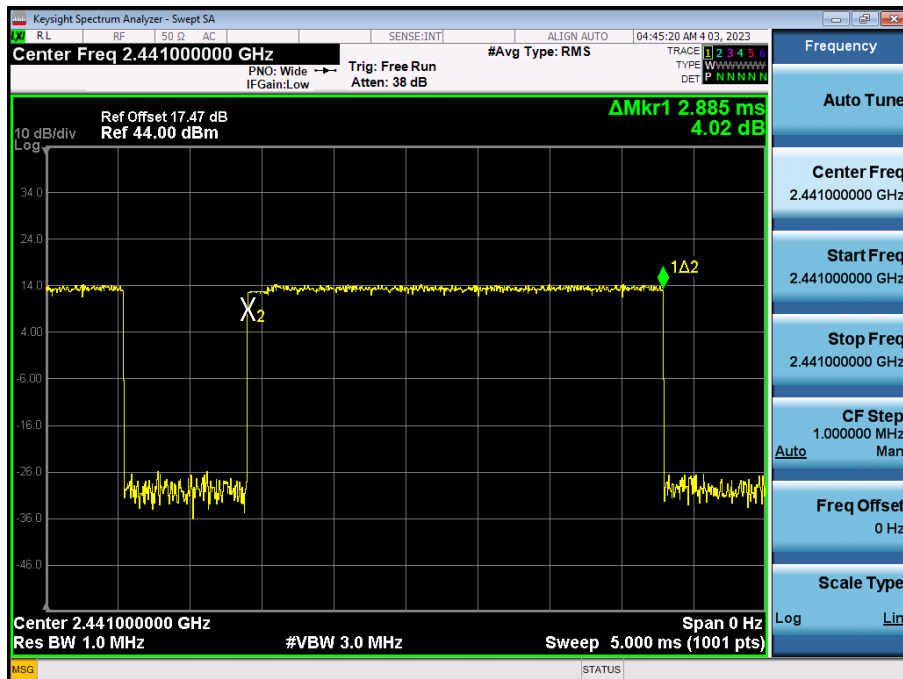

Test Plots ($\pi/4$ DQPSK)

Dwell Time (CH.78)

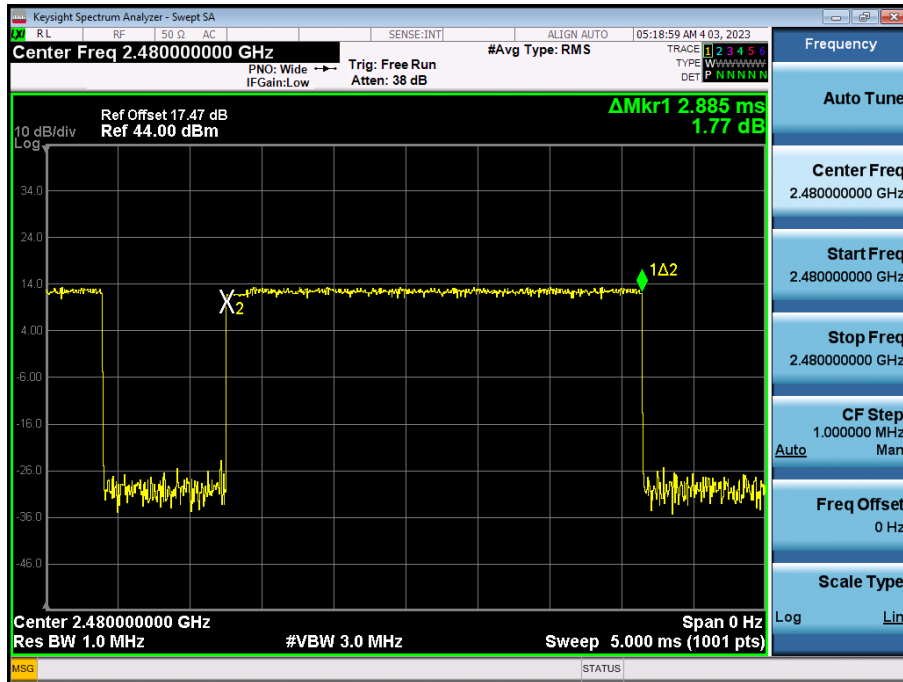

10.6 SPURIOUS EMISSIONS


10.6.1 CONDUCTED SPURIOUS EMISSIONS

In order to simplify the report, attached plots were only the worst case channel and data rate.


TEST PLOTS

(Worst case : GFSK_CH.39)

Spurious Emission (30 MHz – 26.50 GHz) Ant.1

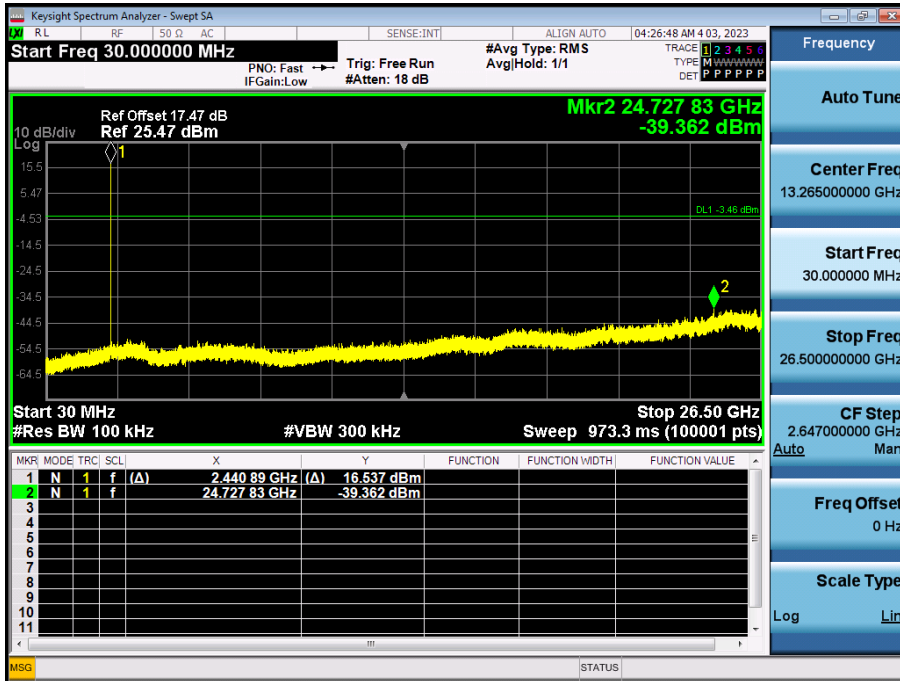

Spurious Emission (30 MHz – 26.50 GHz) Ant.2

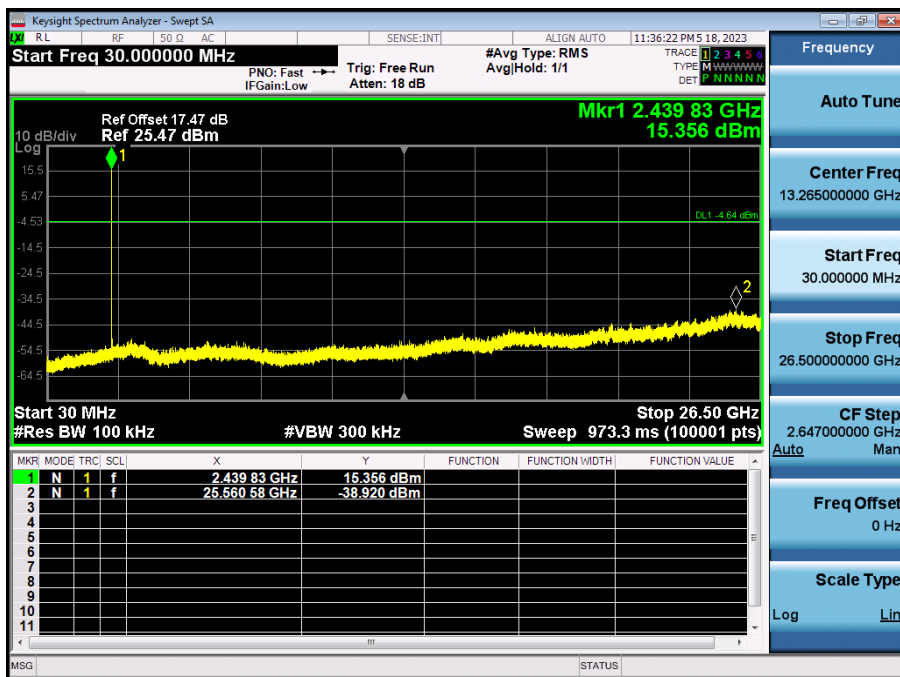

Note

Ant.1: Limit (dBm): -3.46, Ant.2: Limit (dBm): -4.64

10.6.2 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Measured Value	A.F+C.L+D.F	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. The Measured of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBμV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dBμV]	[dB/m]	[H/V]	[dBμV/m]	[dBμV/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.
2. Radiated test is performed with hopping off.

Frequency Range : Above 1 GHz

[Ant.1]

Closed Mode

Operation Mode: (GFSK)

CH Low

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	44.54	2.51	V	0	47.05	73.98	26.93	PK
4804	44.54	2.51	V	-24.73	22.32	53.98	31.66	AV
7206	42.08	9.10	V	0	51.18	73.98	22.80	PK
7206	42.08	9.10	V	-24.73	26.44	53.98	27.54	AV
4804	44.80	2.51	H	0	47.31	73.98	26.67	PK
4804	44.80	2.51	H	-24.73	22.58	53.98	31.40	AV
7206	42.32	9.10	H	0	51.42	73.98	22.56	PK
7206	42.32	9.10	H	-24.73	26.68	53.98	27.30	AV

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	43.48	2.92	V	0	46.40	73.98	27.58	PK
4882	43.48	2.92	V	-24.73	21.67	53.98	32.31	AV
7323	42.57	9.42	V	0	51.99	73.98	21.99	PK
7323	42.57	10.20	V	-24.73	28.04	53.98	25.94	AV
4882	43.68	2.92	H	0	46.60	73.98	27.38	PK
4882	43.68	2.92	H	-24.73	21.87	53.98	32.11	AV
7323	42.97	9.42	H	0	52.39	73.98	21.59	PK
7323	42.97	10.20	H	-24.73	28.44	53.98	25.54	AV

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.79	2.00	V	0	45.79	73.98	28.19	PK
4960	43.79	2.00	V	-24.73	21.06	53.98	32.92	AV
7440	39.63	9.99	V	0	49.62	73.98	24.36	PK
7440	39.63	9.99	V	-24.73	24.89	53.98	29.09	AV
4960	40.38	2.00	H	0	42.38	73.98	31.60	PK
4960	40.38	2.00	H	-24.73	17.65	53.98	36.33	AV
7440	39.81	9.99	H	0	49.80	73.98	24.18	PK
7440	39.81	9.99	H	-24.73	25.07	53.98	28.91	AV

Operation Mode: ($\pi/4$ DQPSK)

CH Low

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	44.97	2.51	V	0	47.48	73.98	26.50	PK
4804	44.97	2.51	V	-24.73	22.75	53.98	31.23	AV
7206	41.97	9.10	V	0	51.07	73.98	22.91	PK
7206	41.97	9.10	V	-24.73	26.33	53.98	27.65	AV
4804	45.22	2.51	H	0	47.73	73.98	26.25	PK
4804	45.22	2.51	H	-24.73	23.00	53.98	30.98	AV
7206	42.51	9.10	H	0	51.61	73.98	22.37	PK
7206	42.51	9.10	H	-24.73	26.87	53.98	27.11	AV

CH Mid

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4882	42.57	2.92	V	0	45.49	73.98	28.49	PK
4882	42.57	2.92	V	-24.73	20.76	53.98	33.22	AV
7323	42.55	9.42	V	0	51.97	73.98	22.01	PK
7323	42.55	10.20	V	-24.73	28.02	53.98	25.96	AV
4882	42.94	2.92	H	0	45.86	73.98	28.12	PK
4882	42.94	2.92	H	-24.73	21.13	53.98	32.85	AV
7323	43.06	9.42	H	0	52.48	73.98	21.50	PK
7323	43.06	10.20	H	-24.73	28.53	53.98	25.45	AV

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.46	2.00	V	0	45.46	73.98	28.52	PK
4960	43.46	2.00	V	-24.73	20.73	53.98	33.25	AV
7440	39.56	9.99	V	0	49.55	73.98	24.43	PK
7440	39.56	9.99	V	-24.73	24.82	53.98	29.16	AV
4960	41.53	2.00	H	0	43.53	73.98	30.45	PK
4960	41.53	2.00	H	-24.73	18.80	53.98	35.18	AV
7440	39.72	9.99	H	0	49.71	73.98	24.27	PK
7440	39.72	9.99	H	-24.73	24.98	53.98	29.00	AV

Operation Mode: (8DPSK)

CH Low

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	44.59	2.51	V	0	47.10	73.98	26.88	PK
4804	44.59	2.51	V	-24.73	22.37	53.98	31.61	AV
7206	41.57	9.10	V	0	50.67	73.98	23.31	PK
7206	41.57	9.10	V	-24.73	25.93	53.98	28.05	AV
4804	44.72	2.51	H	0	47.23	73.98	26.75	PK
4804	44.72	2.51	H	-24.73	22.50	53.98	31.48	AV
7206	41.91	9.10	H	0	51.01	73.98	22.97	PK
7206	41.91	9.10	H	-24.73	26.27	53.98	27.71	AV

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	43.60	2.92	V	0	46.52	73.98	27.46	PK
4882	43.60	2.92	V	-24.73	21.79	53.98	32.19	AV
7323	41.57	9.42	V	0	50.99	73.98	22.99	PK
7323	41.57	10.20	V	-24.73	27.04	53.98	26.94	AV
4882	43.83	2.92	H	0	46.75	73.98	27.23	PK
4882	43.83	2.92	H	-24.73	22.02	53.98	31.96	AV
7323	41.96	9.42	H	0	51.38	73.98	22.60	PK
7323	41.96	10.20	H	-24.73	27.43	53.98	26.55	AV

CH High

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4960	43.37	2.00	V	0	45.37	73.98	28.61	PK
4960	43.37	2.00	V	-24.73	20.64	53.98	33.34	AV
7440	39.11	9.99	V	0	49.10	73.98	24.88	PK
7440	39.11	9.99	V	-24.73	24.37	53.98	29.61	AV
4960	40.91	2.00	H	0	42.91	73.98	31.07	PK
4960	40.91	2.00	H	-24.73	18.18	53.98	35.80	AV
7440	39.21	9.99	H	0	49.20	73.98	24.78	PK
7440	39.21	9.99	H	-24.73	24.47	53.98	29.51	AV

Open Mode

Operation Mode: (GFSK)

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	43.55	2.00	V	0	45.55	73.98	28.43	PK
4960	43.55	2.00	V	-24.73	20.82	53.98	33.16	AV
7440	42.08	9.99	V	0	52.07	73.98	21.91	PK
7440	42.08	9.99	V	-24.73	27.34	53.98	26.64	AV
4960	43.88	2.00	H	0	45.88	73.98	28.10	PK
4960	43.88	2.00	H	-24.73	21.15	53.98	32.83	AV
7440	41.37	9.99	H	0	51.36	73.98	22.62	PK
7440	41.37	9.99	H	-24.73	26.63	53.98	27.35	AV

Half Open

Operation Mode: (GFSK)

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	42.60	2.92	V	0	45.52	73.98	28.46	PK
4882	42.60	2.92	V	-24.73	20.79	53.98	33.19	AV
7323	42.43	9.42	V	0	51.85	73.98	22.13	PK
7323	42.43	10.20	V	-24.73	27.90	53.98	26.08	AV
4882	43.51	2.92	H	0	46.43	73.98	27.55	PK
4882	43.51	2.92	H	-24.73	21.70	53.98	32.28	AV
7323	42.11	9.42	H	0	51.53	73.98	22.45	PK
7323	42.11	10.20	H	-24.73	27.58	53.98	26.40	AV

[Ant.2]

Closed Mode

Operation Mode: (GFSK)

CH Low

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	44.61	2.51	V	0	47.12	73.98	26.86	PK
4804	44.61	2.51	V	-24.73	22.39	53.98	31.59	AV
7206	40.79	9.10	V	0	49.89	73.98	24.09	PK
7206	40.79	9.10	V	-24.73	25.15	53.98	28.83	AV
4804	44.76	2.51	H	0	47.27	73.98	26.71	PK
4804	44.76	2.51	H	-24.73	22.54	53.98	31.44	AV
7206	40.88	9.10	H	0	49.98	73.98	24.00	PK
7206	40.88	9.10	H	-24.73	25.24	53.98	28.74	AV

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	42.79	2.92	V	0	45.71	73.98	28.27	PK
4882	42.79	2.92	V	-24.73	20.98	53.98	33.00	AV
7323	41.85	9.42	V	0	51.27	73.98	22.71	PK
7323	41.85	10.20	V	-24.73	27.32	53.98	26.66	AV
4882	42.69	2.92	H	0	45.61	73.98	28.37	PK
4882	42.69	2.92	H	-24.73	20.88	53.98	33.10	AV
7323	41.56	9.42	H	0	50.98	73.98	23.00	PK
7323	41.56	10.20	H	-24.73	27.03	53.98	26.95	AV

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	42.70	2.00	V	0	44.70	73.98	29.28	PK
4960	42.70	2.00	V	-24.73	19.97	53.98	34.01	AV
7440	40.63	9.99	V	0	50.62	73.98	23.36	PK
7440	40.63	9.99	V	-24.73	25.89	53.98	28.09	AV
4960	43.24	2.00	H	0	45.24	73.98	28.74	PK
4960	43.24	2.00	H	-24.73	20.51	53.98	33.47	AV
7440	40.51	9.99	H	0	50.50	73.98	23.48	PK
7440	40.51	9.99	H	-24.73	25.77	53.98	28.21	AV

Operation Mode: ($\pi/4$ DQPSK)

CH Low

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4804	44.65	2.51	V	0	47.16	73.98	26.82	PK
4804	44.65	2.51	V	-24.73	22.43	53.98	31.55	AV
7206	41.22	9.10	V	0	50.32	73.98	23.66	PK
7206	41.22	9.10	V	-24.73	25.58	53.98	28.40	AV
4804	44.92	2.51	H	0	47.43	73.98	26.55	PK
4804	44.92	2.51	H	-24.73	22.70	53.98	31.28	AV
7206	41.28	9.10	H	0	50.38	73.98	23.60	PK
7206	41.28	9.10	H	-24.73	25.64	53.98	28.34	AV

CH Mid

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4882	43.17	2.92	V	0	46.09	73.98	27.89	PK
4882	43.17	2.92	V	-24.73	21.36	53.98	32.62	AV
7323	41.51	9.42	V	0	50.93	73.98	23.05	PK
7323	41.51	10.20	V	-24.73	26.98	53.98	27.00	AV
4882	43.05	2.92	H	0	45.97	73.98	28.01	PK
4882	43.05	2.92	H	-24.73	21.24	53.98	32.74	AV
7323	41.43	9.42	H	0	50.85	73.98	23.13	PK
7323	41.43	10.20	H	-24.73	26.90	53.98	27.08	AV

CH High

Frequency [MHz]	Measured Value [dB μ V]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
4960	43.07	2.00	V	0	45.07	73.98	28.91	PK
4960	43.07	2.00	V	-24.73	20.34	53.98	33.64	AV
7440	40.40	9.99	V	0	50.39	73.98	23.59	PK
7440	40.40	9.99	V	-24.73	25.66	53.98	28.32	AV
4960	42.54	2.00	H	0	44.54	73.98	29.44	PK
4960	42.54	2.00	H	-24.73	19.81	53.98	34.17	AV
7440	40.31	9.99	H	0	50.30	73.98	23.68	PK
7440	40.31	9.99	H	-24.73	25.57	53.98	28.41	AV

Operation Mode: (8DPSK)

CH Low

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	45.08	2.51	V	0	47.59	73.98	26.39	PK
4804	45.08	2.51	V	-24.73	22.86	53.98	31.12	AV
7206	41.05	9.10	V	0	50.15	73.98	23.83	PK
7206	41.05	9.10	V	-24.73	25.41	53.98	28.57	AV
4804	45.19	2.51	H	0	47.70	73.98	26.28	PK
4804	45.19	2.51	H	-24.73	22.97	53.98	31.01	AV
7206	41.14	9.10	H	0	50.24	73.98	23.74	PK
7206	41.14	9.10	H	-24.73	25.50	53.98	28.48	AV

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	43.28	2.92	V	0	46.20	73.98	27.78	PK
4882	43.28	2.92	V	-24.73	21.47	53.98	32.51	AV
7323	41.31	9.42	V	0	50.73	73.98	23.25	PK
7323	41.31	10.20	V	-24.73	26.78	53.98	27.20	AV
4882	43.21	2.92	H	0	46.13	73.98	27.85	PK
4882	43.21	2.92	H	-24.73	21.40	53.98	32.58	AV
7323	41.22	9.42	H	0	50.64	73.98	23.34	PK
7323	41.22	10.20	H	-24.73	26.69	53.98	27.29	AV

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	42.85	2.00	V	0	44.85	73.98	29.13	PK
4960	42.85	2.00	V	-24.73	20.12	53.98	33.86	AV
7440	41.14	9.99	V	0	51.13	73.98	22.85	PK
7440	41.14	9.99	V	-24.73	26.40	53.98	27.58	AV
4960	43.20	2.00	H	0	45.20	73.98	28.78	PK
4960	43.20	2.00	H	-24.73	20.47	53.98	33.51	AV
7440	41.09	9.99	H	0	51.08	73.98	22.90	PK
7440	41.09	9.99	H	-24.73	26.35	53.98	27.63	AV

Open Mode

Operation Mode: (GFSK)

CH Mid

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4882	42.69	2.92	V	0	45.61	73.98	28.37	PK
4882	42.69	2.92	V	-24.73	20.88	53.98	33.10	AV
7323	41.28	9.42	V	0	50.70	73.98	23.28	PK
7323	41.28	10.20	V	-24.73	26.75	53.98	27.23	AV
4882	43.40	2.92	H	0	46.32	73.98	27.66	PK
4882	43.40	2.92	H	-24.73	21.59	53.98	32.39	AV
7323	41.52	9.42	H	0	50.94	73.98	23.04	PK
7323	41.52	10.20	H	-24.73	26.99	53.98	26.99	AV

Half Open Mode

Operation Mode: (GFSK)

CH High

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4960	42.88	2.00	V	0	44.88	73.98	29.10	PK
4960	42.88	2.00	V	-24.73	20.15	53.98	33.83	AV
7440	40.97	9.99	V	0	50.96	73.98	23.02	PK
7440	40.97	9.99	V	-24.73	26.23	53.98	27.75	AV
4960	42.76	2.00	H	0	44.76	73.98	29.22	PK
4960	42.76	2.00	H	-24.73	20.03	53.98	33.95	AV
7440	40.68	9.99	H	0	50.67	73.98	23.31	PK
7440	40.68	9.99	H	-24.73	25.94	53.98	28.04	AV

[RSDB]

Scenario 3

Bluetooth_Ch.0_π/4-DQPSK + WLAN_2.4 GHz_802.11b_Ch.6_1 Mbps + WLAN_5 GHz_802.11a_Ch.120_6 Mbps

Frequency [MHz]	Measured Value [dBμV]	AF+CL+DF-AG [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
4804	43.97	2.51	V	0	46.48	73.98	27.50	PK
4804	43.97	2.51	V	-24.73	21.75	53.98	32.23	AV
7206	41.15	9.10	V	0	50.25	73.98	23.73	PK
7206	41.15	9.10	V	-24.73	25.51	53.98	28.47	AV
4804	44.17	2.51	H	0	46.68	73.98	27.30	PK
4804	44.17	2.51	H	-24.73	21.95	53.98	32.03	AV
7206	41.23	9.10	H	0	50.33	73.98	23.65	PK
7206	41.23	9.10	H	-24.73	25.59	53.98	28.39	AV


Note : DTS, UNII RSDB Data refer to [DTS], [UNII] Test Report

RESULT PLOTS

[Ant.1]

[Closed Mode]


Radiated Spurious Emissions plot – Peak & Average Result ($\pi/4$ DQPSK, Ch.0 3rd Harmonic, Z-H)

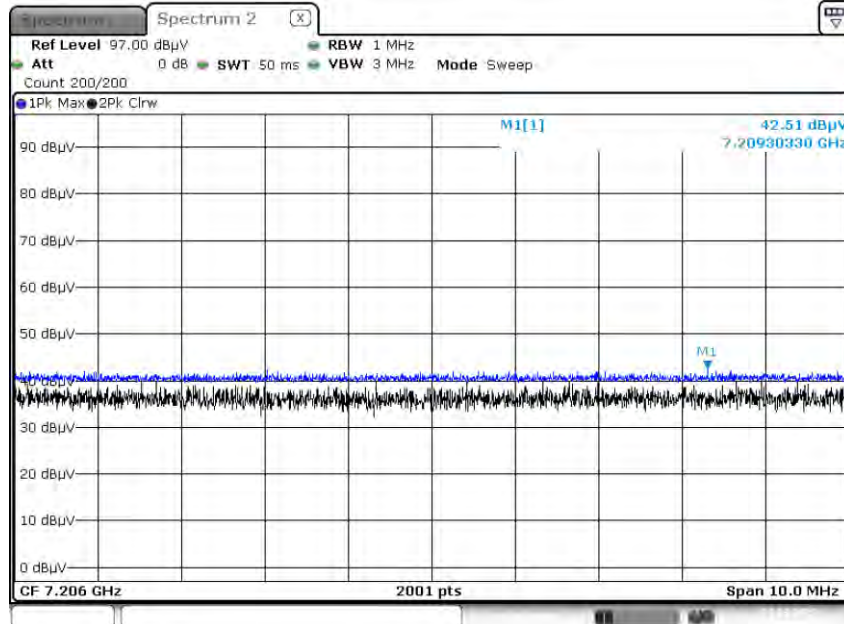

Date: 24 MAR 2023 13:18:03

[Open Mode]


Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, X-V)

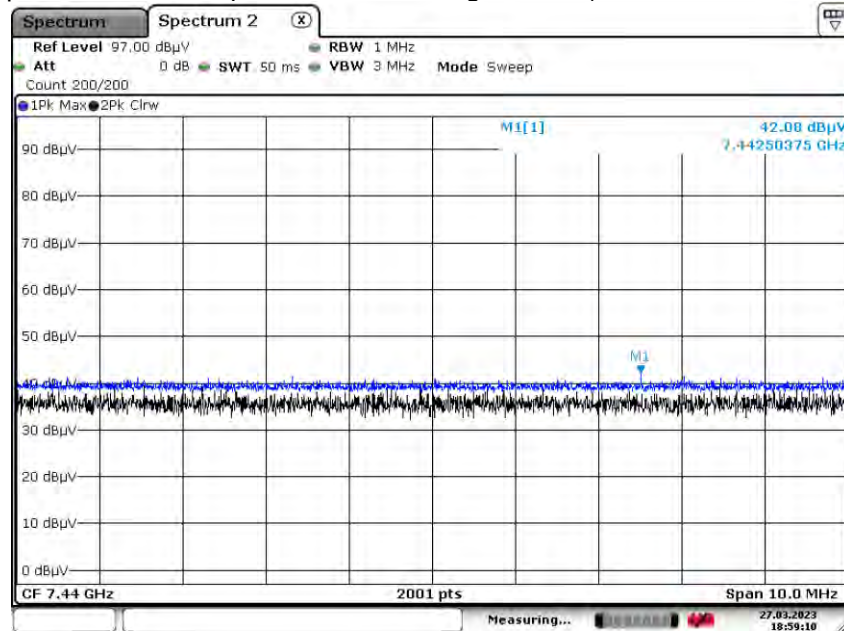

Date: 27 MAR 2023 18:59:11

[Half Open]

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.39 3rd Harmonic, X-V)

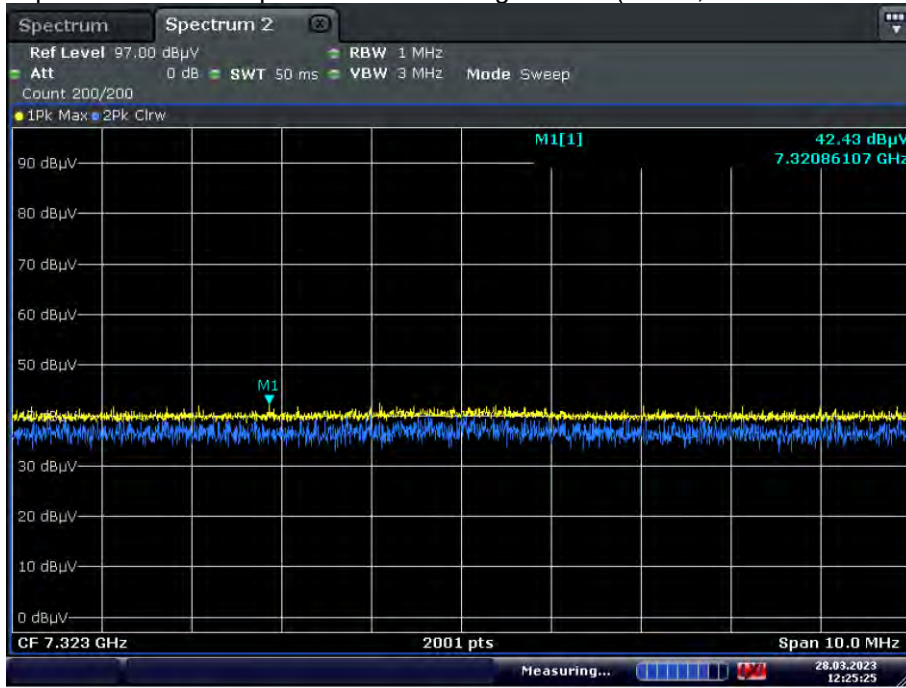


Date: 28. MAR 2023 12:25:25

[Ant.2]

[Closed]


Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.39 3rd Harmonic, X-V)

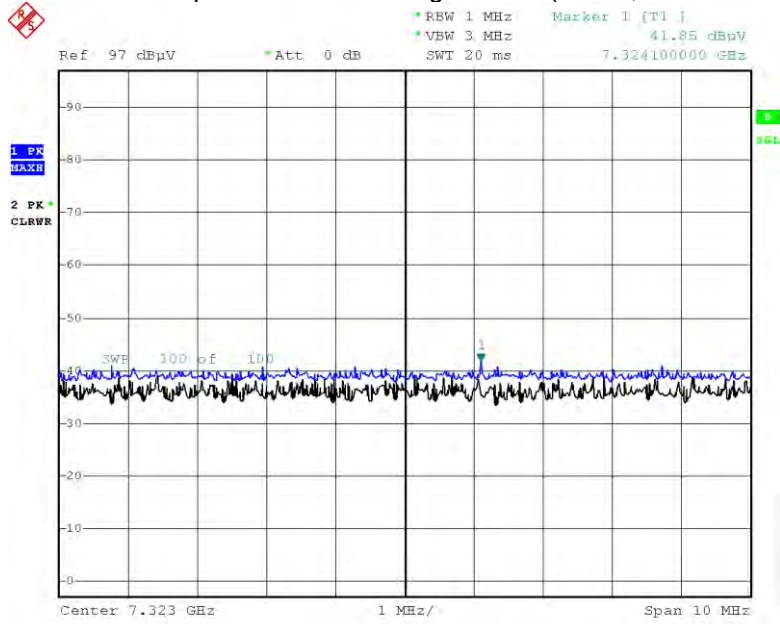

Date: 6.APR.2023 17:20:02

[Open]


Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.39 3rd Harmonic, X-H)

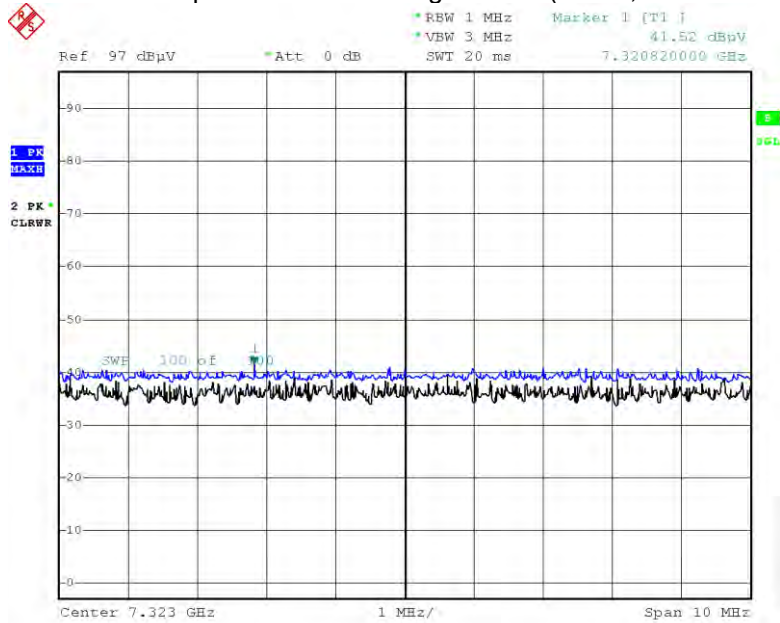

Date: 6.APR.2023 14:28:23

[Half Open Mode]

Radiated Spurious Emissions plot – Peak & Average Result (GFSK, Ch.78 3rd Harmonic, X-V)

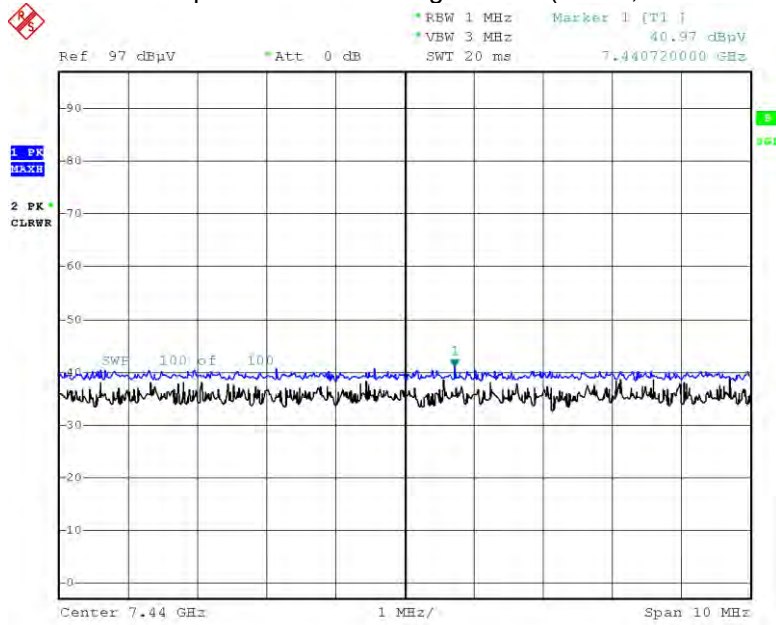


Date: 6.APR.2023 12:28:13

[RSDB]

Scenario 3

Bluetooth_Ch.0_π/4-DQPSK + WLAN_2.4 GHz_802.11b_Ch.6_1 Mbps + WLAN_5 GHz_802.11a_Ch.120_6 Mbps

Radiated Spurious Emissions plot – Peak & Average Result (3rd Harmonic, X-H)

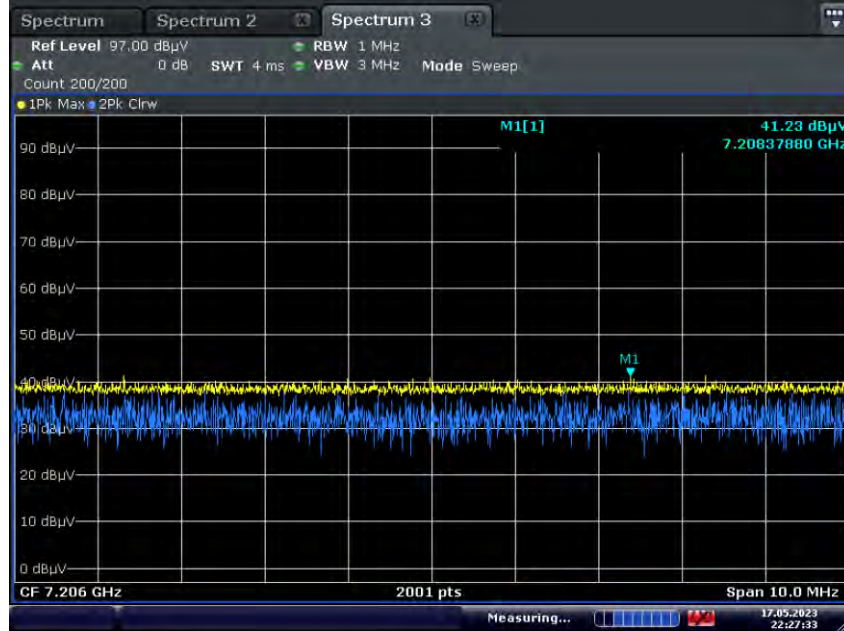

Date: 17.MAY.2023 22:27:33

Note:

Plot of worst case are only reported.

10.6.3 RADIATED RESTRICTED BAND EDGES

[Ant.1]

[Closed Mode]

Operation Mode	Normal(GFSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	18.77	34.90	H	0	53.67	73.98	20.31	PK
2390.0	18.77	34.90	H	-24.73	28.93	53.98	25.05	AV
2390.0	18.63	34.90	V	0	53.53	73.98	20.45	PK
2390.0	18.63	34.90	V	-24.73	28.79	53.98	25.19	AV
2483.5	19.86	35.10	H	0	54.96	73.98	19.02	PK
2483.5	19.86	35.10	H	-24.73	30.23	53.98	23.75	AV
2483.5	18.90	35.10	V	0	54.00	73.98	19.98	PK
2483.5	18.90	35.10	V	-24.73	29.27	53.98	24.71	AV

Operation Mode	EDR(π /4DQPSK)
Operating Frequency	2402 MHz, 2480 MHz
Channel No	CH 0, CH 78

Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	18.90	34.90	H	0	53.80	73.98	20.18	PK
2390.0	18.90	34.90	H	-24.73	29.06	53.98	24.92	AV
2390.0	18.79	34.90	V	0	53.69	73.98	20.29	PK
2390.0	18.79	34.90	V	-24.73	28.95	53.98	25.03	AV
2483.5	20.35	35.10	H	0	55.45	73.98	18.53	PK
2483.5	20.35	35.10	H	-24.73	30.72	53.98	23.26	AV
2483.5	18.79	35.10	V	0	53.89	73.98	20.09	PK
2483.5	18.79	35.10	V	-24.73	29.16	53.98	24.82	AV

Operation Mode EDR(8DPSK)
 Operating Frequency 2402 MHz, 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2390.0	18.35	34.90	H	0	53.25	73.98	20.73	PK
2390.0	18.35	34.90	H	-24.73	28.51	53.98	25.47	AV
2390.0	18.60	34.90	V	0	53.50	73.98	20.48	PK
2390.0	18.60	34.90	V	-24.73	28.76	53.98	25.22	AV
2483.5	20.69	35.10	H	0	55.79	73.98	18.19	PK
2483.5	20.69	35.10	H	-24.73	31.06	53.98	22.92	AV
2483.5	19.10	35.10	V	0	54.20	73.98	19.78	PK
2483.5	19.10	35.10	V	-24.73	29.47	53.98	24.51	AV

[Open Mode]

Operation Mode Normal(GFSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

Frequency [MHz]	Measured Level [dBμV]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.54	35.10	H	0	55.64	73.98	18.34	PK
2483.5	20.54	35.10	H	-24.73	30.91	53.98	23.07	AV
2483.5	19.78	35.10	V	0	54.88	73.98	19.10	PK
2483.5	19.78	35.10	V	-24.73	30.15	53.98	23.83	AV

[Half Open Mode]

Operation Mode Normal(GFSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

Frequency [MHz]	Measured Level [dBμV]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2483.5	20.34	35.10	H	0	55.44	73.98	18.54	PK
2483.5	20.34	35.10	H	-24.73	30.71	53.98	23.27	AV
2483.5	20.18	35.10	V	0	55.28	73.98	18.70	PK
2483.5	20.18	35.10	V	-24.73	30.55	53.98	23.43	AV

[Ant.2]

[Closed Mode]

Operation Mode Normal(GFSK)
 Operating Frequency 2402 MHz, 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Measured Level [dBμV]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.96	34.90	H	0	53.86	73.98	20.12	PK
2390.0	18.96	34.90	H	-24.73	29.12	53.98	24.86	AV
2390.0	18.67	34.90	V	0	53.57	73.98	20.41	PK
2390.0	18.67	34.90	V	-24.73	28.83	53.98	25.15	AV
2483.5	21.48	35.10	H	0	56.58	73.98	17.40	PK
2483.5	21.48	35.10	H	-24.73	31.85	53.98	22.13	AV
2483.5	21.36	35.10	V	0	56.46	73.98	17.52	PK
2483.5	21.36	35.10	V	-24.73	31.73	53.98	22.25	AV

Operation Mode EDR($\pi/4$ DQPSK)
 Operating Frequency 2402 MHz, 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Measured Level [dBμV]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.59	34.90	H	0	53.49	73.98	20.49	PK
2390.0	18.59	34.90	H	-24.73	28.75	53.98	25.23	AV
2390.0	18.54	34.90	V	0	53.44	73.98	20.54	PK
2390.0	18.54	34.90	V	-24.73	28.70	53.98	25.28	AV
2483.5	19.47	35.10	H	0	54.57	73.98	19.41	PK
2483.5	19.47	35.10	H	-24.73	29.84	53.98	24.14	AV
2483.5	19.28	35.10	V	0	54.38	73.98	19.60	PK
2483.5	19.28	35.10	V	-24.73	29.65	53.98	24.33	AV

Operation Mode EDR(8DPSK)
 Operating Frequency 2402 MHz, 2480 MHz
 Channel No CH 0, CH 78

Frequency [MHz]	Measured Level [dBμV]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
2390.0	18.52	34.90	H	0	53.42	73.98	20.56	PK
2390.0	18.52	34.90	H	-24.73	28.68	53.98	25.30	AV
2390.0	18.50	34.90	V	0	53.40	73.98	20.58	PK
2390.0	18.50	34.90	V	-24.73	28.66	53.98	25.32	AV
2483.5	20.92	35.10	H	0	56.02	73.98	17.96	PK
2483.5	20.92	35.10	H	-24.73	31.29	53.98	22.69	AV
2483.5	20.64	35.10	V	0	55.74	73.98	18.24	PK
2483.5	20.64	35.10	V	-24.73	31.01	53.98	22.97	AV

[Open Mode]

Operation Mode Normal(GFSK)
 Operating Frequency 2480 MHz
 Channel No CH 78

Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	19.76	35.10	H	0	54.86	73.98	19.12	PK
2483.5	19.76	35.10	H	-24.73	30.13	53.98	23.85	AV
2483.5	19.52	35.10	V	0	54.62	73.98	19.36	PK
2483.5	19.52	35.10	V	-24.73	29.89	53.98	24.09	AV

[Half Open Mode]

Operation Mode Normal(GFSK)
 Operating Frequency 2480 MHz
 Channel No CH 78


Frequency [MHz]	Measured Level [dB μ V]	AF+CL+DF [dB/m]	Pol. [H/V]	Duty Cycle Correction [dB]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
2483.5	20.96	35.10	H	0	56.06	73.98	17.92	PK
2483.5	20.96	35.10	H	-24.73	31.33	53.98	22.65	AV
2483.5	20.66	35.10	V	0	55.76	73.98	18.22	PK
2483.5	20.66	35.10	V	-24.73	31.03	53.98	22.95	AV

RESULT PLOTS

[Ant.1]

[Closed Mode]


Radiated Restricted Band Edges plot – Average & Peak Result (8DPSK, Ch.78, Z-H)

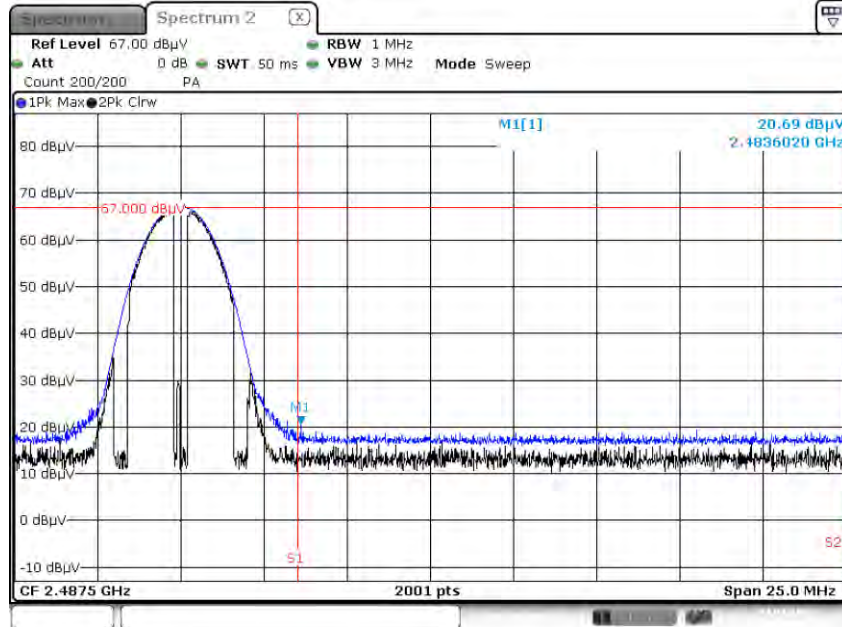

Date: 24 MAR 2023 12:26:44

[Open Mode]


Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, X-H)

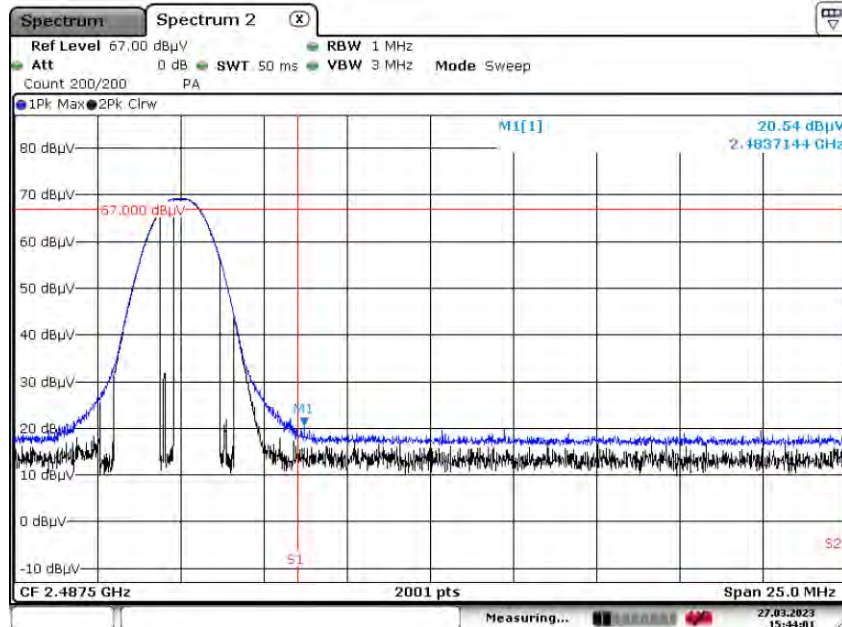

Date: 27 MAR 2023 15:44:02

[Half Open Mode]

Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, X-H)

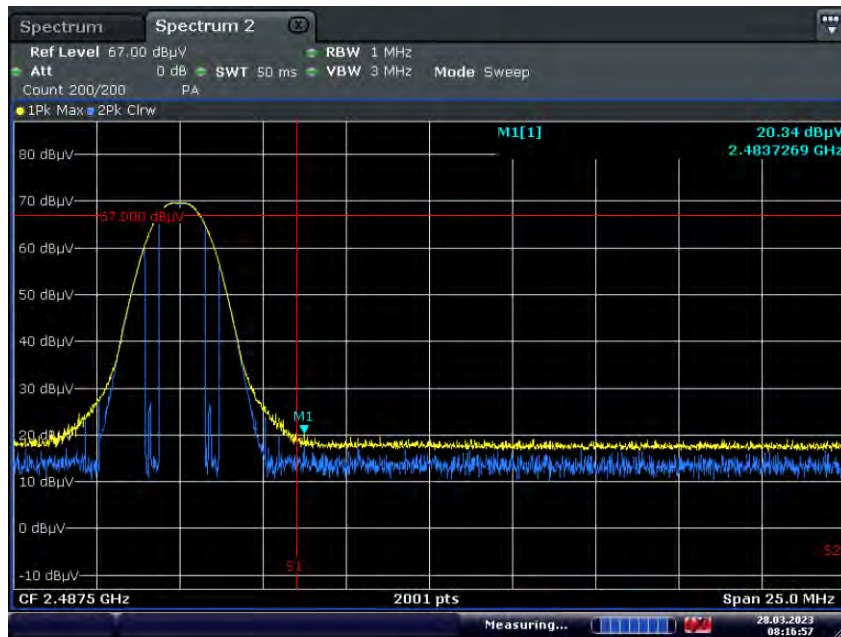


Date: 28 MAR 2023 08:16:57

[Ant.2]

[Closed Mode]


Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, X-H)

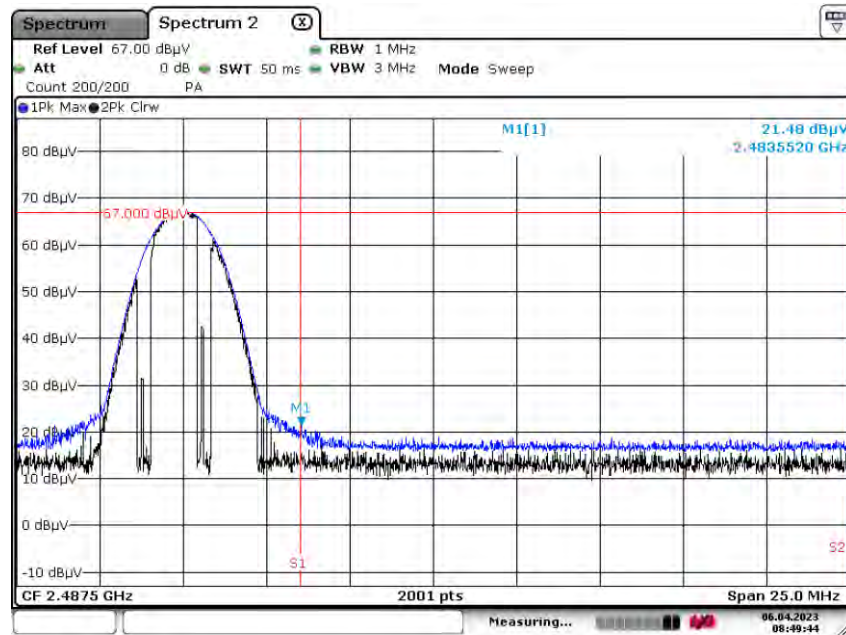

Date: 6 APR 2023 08:49:44

[Open Mode]


Radiated Restricted Band Edges plot – Average & Peak Result (GFSK, Ch.78, X-H)

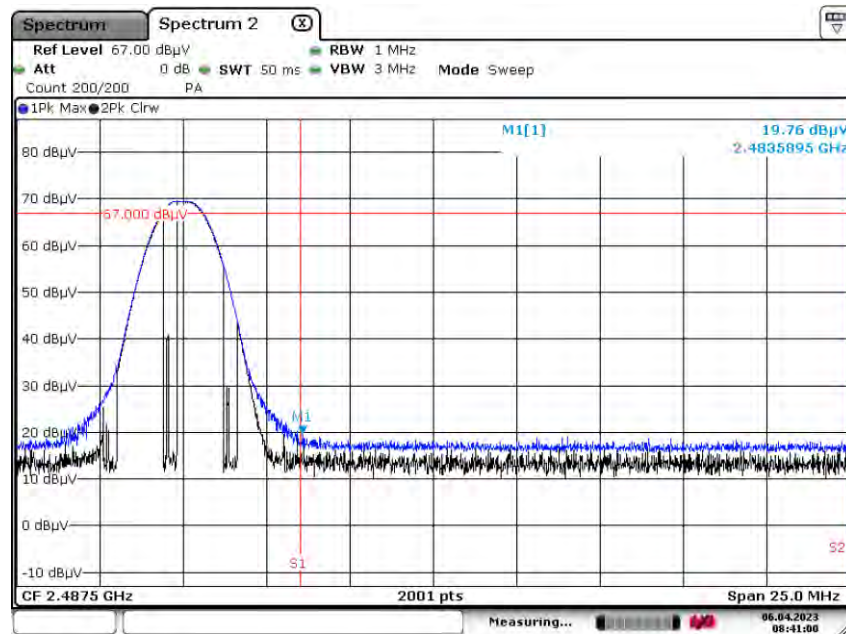

Date: 6 APR 2023 08:41:00

[Half Open Mode]

Radiated Restricted Band Edges plot – Average & Peak Result ($\pi/4$ DQPSK, Ch.78, Z-H)

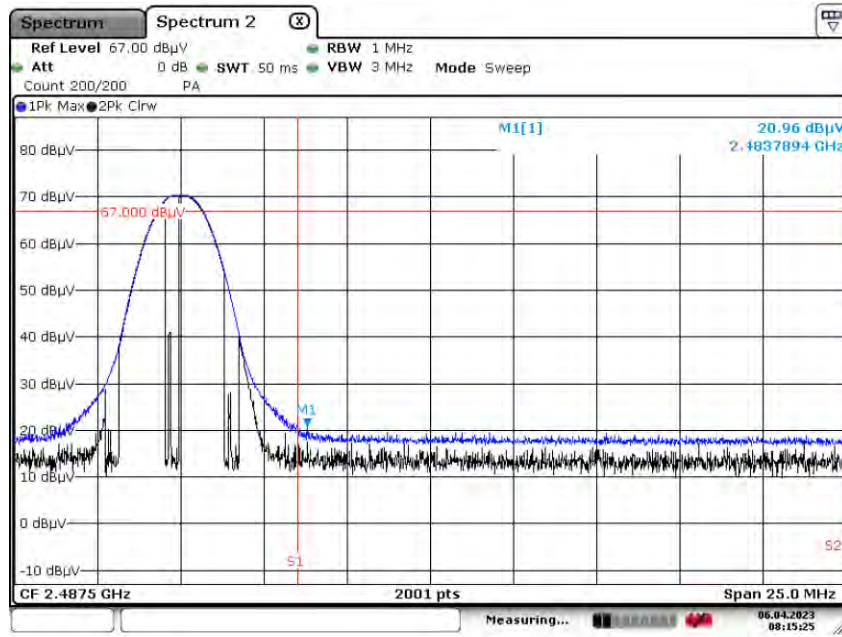

Note:

Plot of worst case are only reported.

10.7 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-F946B/DS
 Operating Conditions : BT Mode
 Comment :

Full Spectrum

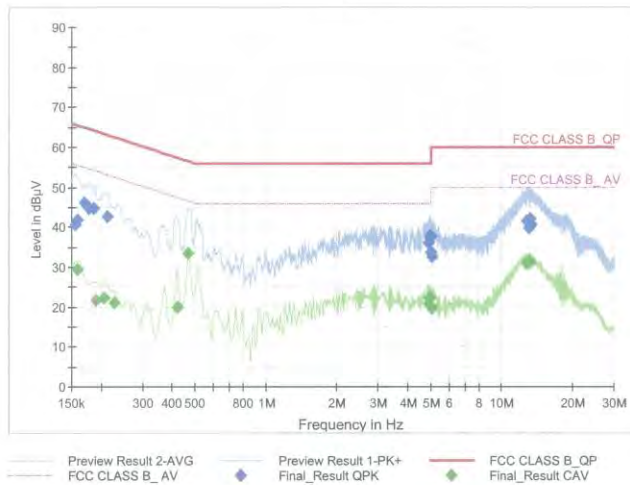

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	40.53	65.75	25.22	1000.0	9.000	N	OFF	9.6
0.1590	41.91	65.52	23.61	1000.0	9.000	L1	OFF	9.7
0.1703	46.18	64.95	18.77	1000.0	9.000	N	OFF	9.6
0.1770	44.81	64.63	19.82	1000.0	9.000	N	OFF	9.6
0.1860	44.81	64.21	19.40	1000.0	9.000	L1	OFF	9.7
0.2130	42.77	63.09	20.32	1000.0	9.000	L1	OFF	9.7
4.8875	36.18	56.00	19.82	1000.0	9.000	L1	OFF	9.8
4.9415	37.82	56.00	18.18	1000.0	9.000	L1	OFF	9.8
4.9460	37.31	56.00	18.69	1000.0	9.000	L1	OFF	9.8
4.9933	37.67	56.00	18.33	1000.0	9.000	L1	OFF	9.8
5.0000	33.66	56.00	22.34	1000.0	9.000	L1	OFF	9.8
5.0473	32.66	60.00	27.34	1000.0	9.000	L1	OFF	9.8
12.7738	41.52	60.00	18.48	1000.0	9.000	L1	OFF	10.1
12.8525	41.34	60.00	18.66	1000.0	9.000	L1	OFF	10.1
13.0348	39.85	60.00	20.15	1000.0	9.000	L1	OFF	10.1
13.0865	41.27	60.00	18.73	1000.0	9.000	L1	OFF	10.1
13.1900	42.02	60.00	17.98	1000.0	9.000	L1	OFF	10.1
13.3160	40.74	60.00	19.26	1000.0	9.000	L1	OFF	10.1

2023-04-17

오후 8:39:12

Test

2 / 2

Final_Result_CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1590	29.44	55.52	26.07	1000.0	9.000	N	OFF	9.6
0.1905	21.53	54.02	32.48	1000.0	9.000	L1	OFF	9.7
0.2063	22.18	53.36	31.17	1000.0	9.000	N	OFF	9.6
0.2265	20.92	52.58	31.65	1000.0	9.000	L1	OFF	9.7
0.4223	19.99	47.40	27.41	1000.0	9.000	L1	OFF	9.7
0.4695	33.53	46.52	12.99	1000.0	9.000	L1	OFF	9.7
4.8875	22.08	46.00	23.92	1000.0	9.000	L1	OFF	9.8
4.9280	20.88	46.00	25.12	1000.0	9.000	L1	OFF	9.8
4.9370	22.60	46.00	23.40	1000.0	9.000	L1	OFF	9.8
4.9460	22.15	46.00	23.85	1000.0	9.000	L1	OFF	9.8
4.9978	20.12	46.00	25.88	1000.0	9.000	L1	OFF	9.8
5.0473	19.54	50.00	30.46	1000.0	9.000	L1	OFF	9.8
12.7265	30.92	50.00	19.08	1000.0	9.000	L1	OFF	10.1
12.7715	31.18	50.00	18.82	1000.0	9.000	L1	OFF	10.1
13.0325	31.06	50.00	18.94	1000.0	9.000	L1	OFF	10.1
13.0843	31.47	50.00	18.53	1000.0	9.000	L1	OFF	10.1
13.1923	31.32	50.00	18.68	1000.0	9.000	L1	OFF	10.1
13.2395	31.27	50.00	18.73	1000.0	9.000	L1	OFF	10.1

2023-04-17

오후 8:39:12

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/22/2023	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/07/2023	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Keysight	MY55410508	09/06/2023	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	11/02/2023	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75305528	01/03/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C-010	Agilent	08285	06/21/2023	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
Controller	EM2090	Emco	060520	N/A	N/A
Turn Table	N/A	Ets	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1191	11/18/2023	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170124	03/28/2025	Biennial
Amp & Filter Bank Switch Controller	FBSM-01A	TNM system	0	N/A	N/A
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/13/2023	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/13/2023	Annual
Band Reject Filter	WRCJV5100/5850-40/50-8EEK	Wainwright Instruments	1	02/09/2024	Annual
ATT(3 dB) + LNA2(6~18 GHz)	18B-03, CBL06185030	WEINSCHEL CERNEX	N/A	12/05/2023	Annual
ATT(10 dB) + LNA1(0.1~18 GHz)	56-10, CBLU1183540B-01	Api tech, CERNEX	N/A	12/05/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
High Pass Filter	WHKX8-6090-7000-18000-40SS	Wainwright Instruments	N/A	12/05/2023	Annual
Thru	COAXIAL ATTENUATOR	T&M SYSTEM	N/A	12/05/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
Spectrum Analyzer	FSP(9 kHz ~ 30 GHz)	Rohde & Schwarz	836650/016	09/06/2023	Annual
Spectrum Analyzer	FSVA40(10 Hz ~ 40 GHz)	Rohde & Schwarz	101502	03/17/2024	Annual
Signal Analyzer	N9030A	Keysight	MY52350879	01/02/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2305-FC062-P