

# CERTIFICATION TEST REPORT

**Report Number. :** 4790841160-E12V3

**Applicant :** SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model :** SC-55D, SCG22

**FCC ID :** A3LSMF946JPN

**EUT Description :** GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
NFC, WPT and UWB

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART F

**Date Of Issue:**

2023-07-10

**Prepared by:**

UL KOREA LTD.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL KOREA LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2023-06-30	Initial issue	SunGeun Lee
V2	2023-07-07	Updated to address TCB's question	SunGeun Lee
V3	2023-07-10	Updated to address TCB's question	SunGeun Lee

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b>	<b>5</b>
1.1. INTRODUCTION OF TEST DATA REUSE	6
<b>2. SUMMARY TABLE</b>	<b>7</b>
<b>3. TEST METHODOLOGY</b>	<b>7</b>
<b>4. FACILITIES AND ACCREDITATION</b>	<b>7</b>
<b>5. CALIBRATION AND UNCERTAINTY</b>	<b>8</b>
5.1. MEASURING INSTRUMENT CALIBRATION	8
5.2. SAMPLE CALCULATION	8
5.3. MEASUREMENT UNCERTAINTY	8
5.4. DECISION RULE	8
<b>6. EQUIPMENT UNDER TEST</b>	<b>9</b>
6.1. EUT DESCRIPTION	9
6.2. DESCRIPTION OF AVAILABLE ANTENNAS	10
6.3. WORST-CASE CONFIGURATION AND MODE	11
6.4. DESCRIPTION OF TEST SETUP	12
<b>7. MEASUREMENT METHOD</b>	<b>13</b>
<b>8. TEST AND MEASUREMENT EQUIPMENT</b>	<b>14</b>
<b>9. ANTENNA PORT TEST RESULTS</b>	<b>15</b>
9.1. 10 dB BANDWIDTH	15
9.1.1. 10dB BANDWIDTH MEASUREMENT	16
9.1.2. 10dB BANDWIDTH PLOT	17
9.2. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS	19
9.2.1. MAXIMUM PEAK AND AVERAGE POWER	20
9.3. CESSATION TIME	23
<b>10. RADIATED TEST RESULTS</b>	<b>26</b>
10.1. LIMITS AND PROCEDURE	26
10.2. TRANSMITTER ABOVE 1 GHz	29
10.2.1. SPURIOUS EMISSION 1 GHz – 6 GHz	29
10.2.2. SPURIOUS EMISSION 9 GHz – 18 GHz	32
10.2.3. SPURIOUS EMISSION 18 GHz – 40 GHz	35
10.2.4. SPURIOUS EMISSION 1164 MHz – 1240 MHz	38
10.2.5. SPURIOUS EMISSION 1559 MHz – 1610 MHz	41
10.3. WORST CASE BELOW 1 GHz	44
<b>11. AC POWER LINE CONDUCTED EMISSIONS</b>	<b>45</b>
11.1.1. AC Power Line	46

---

**12. SPOT-CHECK THEST RESULT (WORST CASE).....48**

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE/5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB

**MODEL NUMBER:** SC-55D, SCG22

**SERIAL NUMBER:** 72a869df44d7ece, R3CW20P0DYH, 72a869d9954d7ece, R3CW40NT0CX (RADIATED, Original)  
R3CW408U11T (RADIATED, Spot-check);

**DATE TESTED:** 2023-04-03 ~ 2023-05-12 (Original);  
2023-06-12 ~ 2023-06-30 (Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
47 CFR Part 15 Subpart F	Complies

UL KOREA LTD. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL KOREA LTD. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL KOREA LTD. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL KOREA LTD. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL KOREA LTD. By:



Seokhwan Hong  
Suwon Lab Engineer  
UL KOREA LTD.

Tested By:



Sungeun Lee  
Suwon Lab Engineer  
UL KOREA LTD.

## 1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMF946U UWB (FCC CFR 47 Part 15F). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

## 1.2. DIFFERENCE

The A3LSMF946JPN model shares the same enclosure and circuit board as A3LSMF946U. The UWB antennas and surrounding circuitry and layout are identical between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMF946JPN remains representative of A3LSMF946U. The test data of A3LSMF946U being submitted for this application to cover UWB features.

## 1.3. SPOT CHECK VERIFICATION DATA

(Worst case of the radiated eirp and radiated spurious emissions)

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-F946U Results	SM-F946D Results		
					FCC ID : A3LSMF946U	FCC ID : A3LSMF946JPN		
UWB	eirp	ANT2_CH9_SP1_BPRF4_AV	8000 MHz	-41.3 dBm	-42.81 dBm	-41.97 dBm	0.84 dB	
	RSE	ANT1_CH5_SP0_BPRF4	39557 MHz	-61.3 dBm	-62.12 dBm	-62.44 dBm	-0.32 dB	

Comparison of two models, upper deviation is within 3 dB range and all test results are under FCC Technical Limits.

## 1.4. REFERENCE DETAIL

Reference application that contains the reused reference data in the individual test reports:

Equipment Class	Reference FCC ID (Parent)	Application Type	Reference Test report number	Exhibit Type	Variant Test Report Number	Data Re-used
DTS	A3LSMF946U	Original Grant	4790748041-E8 (802.11b/g/n/ax)	Test Report	4790841160-E7 (802.11b/g/n/ax)	All
DSS	A3LSMF946U	Original Grant	4790748041-E10 (Bluetooth)	Test Report	4790841160-E6 (Bluetooth)	All
NII	A3LSMF946U	Original Grant	4790748041-E11 (802.11a/n/ac/ax)	Test Report	4790841160-E8 (802.11a/n/ac/ax)	All
6CD	A3LSMF946U	Original Grant	4790748041-E12 (802.11a/n/ac/ax)	Test Report	4790841160-E9 (802.11a/n/ac/ax)	All
DCD	A3LSMF946U	Original Grant	4790748041-E14 (WPT)	Test Report	4790841160-E11 (WPT)	All
UWB	A3LSMF946U	Original Grant	4790748041-E15 (UWB)	Test Report	4790841160-E12 (UWB)	All

## 2. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
15.503(a)	10dB Bandwidth	≥ 500 MHz	Radiated	Pass
15.519(e) 15.521(g)	Maximum Peak Power Spectral Density	< 0dBm EIRP in 50 MHz BW		Pass
15.519(c)	Radiated Emissions Above 960 MHz	See table in 15.519(c) for details		Pass
15.519(d)	Radiated Emissions in the 1164 - 1240 MHz and 1559 - 1610 MHz GPS Bands	See table in 15.519(d) for details		Pass
15.209	Radiated Emissions Below 960 MHz	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass
15.207,15.251(j)	AC Line Conducted Emissions 150 kHz - 30 MHz	< FCC 15.207 limits	Power Line conducted	Pass
15.519(a)(1)	Shutdown Timing Requirements	< 10s	Radiated	Pass

## 3. TEST METHODOLOGY

1. FCC 47 CFR Part 2.
2. FCC 47 CFR Part 15.
3. ANSI C63.10-2013.
4. KDB 393764 D01 UWB FAQ v02

## 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 2(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 3(3m semi-anechoic chamber)
<input type="checkbox"/>	Chamber 4(3m Full-anechoic chamber)
<input type="checkbox"/>	Chamber 5(3m Full-anechoic chamber)

UL KOREA LTD. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP (dBm)

= Measured Voltage (dBuV) – 107 dB + Conversion Factor (dB) + Antenna Factor (dB/m)  
+ Total Loss [Cable Loss (dB) – Preamp Gain (dB)]

EIRP (dBm)

= -1.92 dBm = 87.13 dBuV – 107 dB + 11.80 dB + 35.40 dB/m – 29.25 dB

Conversion Factor:

$P \text{ (dBm EIRP)} = E \text{ (dBuV/m)} - 95.2 \text{ dB}$

$P \text{ (dBm EIRP)} = E \text{ (dBuV)} - 107 \text{ dB}$

$E \text{ (dBuV)} - E \text{ (dBuV/m)} = 11.80 \text{ dB}$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.80 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.92 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.06 dB
Radiated Disturbance, 18 GHz to 40 GHz	6.02 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 2, Clause 4.4.3 in IEC Guide 115:2007.



## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE 5G NR Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, NFC, WPT and UWB. This test report addresses the UWB operational mode.

Representative model	Difference	Derivative model
		SCG22
SC-55D	Hardware	SC-55D BT/WIFI IC and layout is same as SM-F946U.
	Software	Supported WWAN Band is different.

Thus, SC-55D was set for final test.

The EUT is a UWB transceiver with 2 TX antennas (Ant1 & 2) installed in a smart phone host and operates on 6.5 GHz (Channel 5) and 8 GHz (Channel 9). Three signal configurations (CONFIG SP0, SP1, SP3) are available for each ANT/CH setting. CONFIG 2 is not supported.

Worst Case Preamble ID (BPRF: 9 – 24 / HPRF: 25 – 32): BPRF: 9 / HPRF: 25

ANT	Channel	CONFIG	PRF Mode	Packet Length
Ant1	5	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
	9	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
Ant2	5 (Not supported)	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127
	9	SP0	BPRF 9	4
			HPRF 25	127
		SP1	BPRF 9	4
			HPRF 25	127
		SP3	BPRF 9	4
			HPRF 25	127

## 6.2. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antennas, with maximum gain of

Frequency Band [MHz]	ANT1 Gain [dBi]	ANT2 Gain [dBi]
CH5 6500	-2.30	-
CH9 8000	-0.30	-2.80

“METAL (SUB3, UWB Ranging) ANTENNA” and “PATCH 1 (UWB AOA ANT1) ANTENNA” as indicated in antenna specification are written as ANT 1 and ANT 2 in this report.

### 6.3. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.


Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

i. Worst case of antenna axis:

	ANT1	ANT2
CH5	Z	-
CH9	Z	Z

ii. Foldable condition

	ANT1	ANT2
CH5	Half-Folded	-
CH9	Full-Folded	Full-Folded

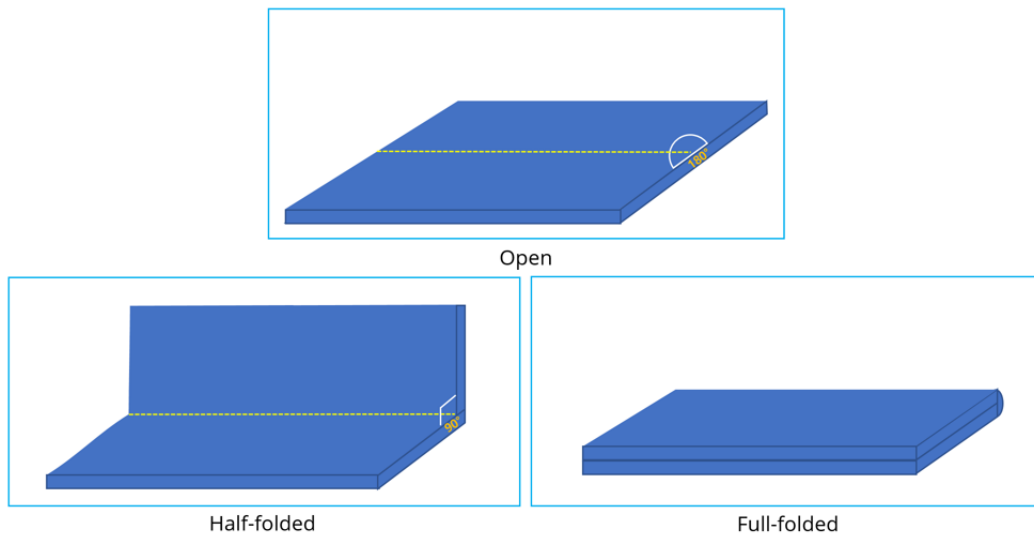

Note: All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

## 6.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37N9QP4SL9DK3	N/A
Data Cable	SAMSUNG	WBR0062M	R37T53J83Z9SEA	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests.  
 Test software in hidden menu exercised the EUT to enable UWB mode.

### SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP) 50cm for Spurious, 3m for EIRP.

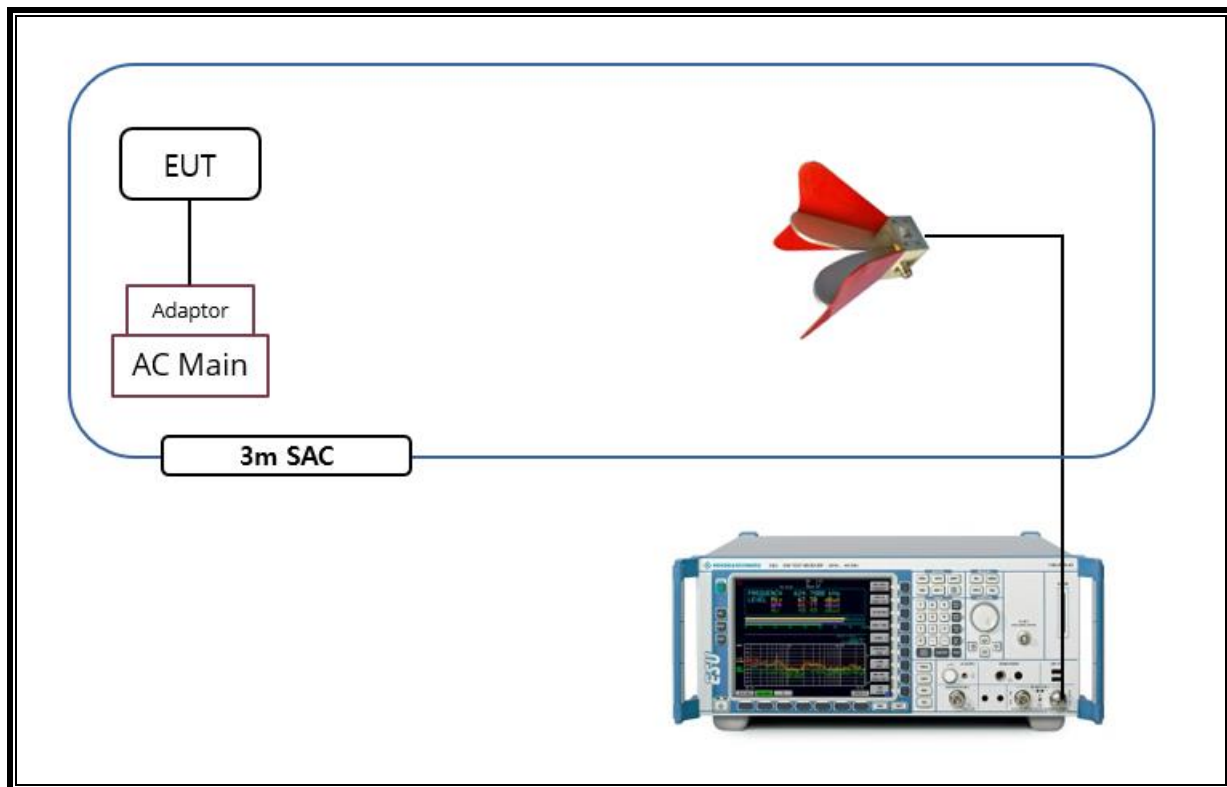

## 7. MEASUREMENT METHOD

10 dB BW : ANSI C63.10-2013, Section 10.1 / FCC Part §15.503(a)

Peak power and maximum average emissions: ANSI C63.10-2013 Section 10.3, 15.519(c)(e)

Cessation time: 15.519(a)(1)

Radiated measurement procedure: ANSI C63.10-2013, Section 10.3

AC Power Line Conducted Emission: ANSI C63.10-2013, Section 6.2

## 8. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	2024-08-15
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	2024-08-15
Antenna, Horn, 18 GHz	ETS	3115	00167211	2024-08-04
Antenna, Horn, 18 GHz	ETS	3115	00161451	2024-08-21
Antenna, Horn, 18 GHz	ETS	3117	00168724	2024-08-04
Antenna, Horn, 18 GHz	ETS	3117	00168717	2024-08-21
Antenna, Horn, 18 GHz	ETS	3117	00218957	2025-01-08
Antenna, Horn, 40 GHz	ETS	3116C	00166155	2024-08-02
Antenna, Horn, 40 GHz	ETS	3116C	00168645	2023-10-13
Preamplifier	ETS	3115-PA	00167475	2023-08-04
Preamplifier	ETS	3116C-PA	00168841	2023-08-04
Preamplifier, 1000 MHz	Sonoma	310N	341282	2023-08-02
Preamplifier, 1000 MHz	Sonoma	310N	351741	2023-08-02
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	2023-08-01
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	2023-08-01
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	2023-08-03
Spectrum Analyzer, 50 GHz	R&S	FSW 50	101538	2024-01-09
Attenuator	PASTERNAK	PE7087-10	A001	2023-08-03
Attenuator	PASTERNAK	PE7087-10	A008	2023-08-03
Attenuator	PASTERNAK	PE7004-10	2	2023-08-01
Attenuator	PASTERNAK	PE7087-10	A009	2023-08-03
EMI Test Receive, 40 GHz	R&S	ESU40	100439	2023-08-02
EMI Test Receive, 40 GHz	R&S	ESU40	100457	2023-07-29
EMI Test Receive, 3 GHz	R&S	ESR3	101832	2023-08-01
High Pass Filter	Wainwright Instruments GmbH	WHW2-8165-11500-21000-40CD	11	2024-01-09
High Pass Filter	Wainwright Instruments GmbH	WHW2-7100-10000-18000-40CD	2	2024-01-05
Low Pass Filter	Wainwright Instruments GmbH	WLKX12-5400-5940-18000-60ST	1	2024-01-05
Low Pass Filter	Wainwright Instruments GmbH	WLKX10-6400-7424-18000-60ST	1	2024-01-05
LISN	R&S	ENV-216	101837	2023-08-04
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

## 9. ANTENNA PORT TEST RESULTS

### 9.1. 10 dB BANDWIDTH

#### LIMITS

FCC §15.503

(a) UWB bandwidth. For the purpose of this subpart, the UWB bandwidth is the frequency band bounded by the points that are 10 dB below the highest radiated emission, as based on the complete transmission system including the antenna. The upper boundary is designated  $f_H$  and the lower boundary is designated  $f_L$ . The frequency at which the highest radiated emission occurs is designated  $f_M$ .

(b) Center frequency. The center frequency,  $f_c$ , equals  $(f_H + f_L)/2$ .

(c) Fractional bandwidth. The fractional bandwidth equals  $2(f_H - f_L) / (f_H + f_L)$ .

(d) Ultra-wideband (UWB) transmitter. An intentional radiator that, at any point in time, has a fractional bandwidth equal to or greater than 0.20 or has a UWB bandwidth equal to or greater than 500 MHz, regardless of the fractional bandwidth.

FCC §15.519

(b) The UWB bandwidth of a device operating under the provisions of this section must be contained between 3100 MHz and 10,600 MHz.

#### Test Procedure

ANSI C63.10-2013 – Section 10.1

#### Test settings

1. RBW = 1MHz
2. VBW = 3MHz
3. Span was set wide enough to capture the 10dB points of the signal
4. Sweep = auto couple
5. Detector = Peak
6. Trace mode = Max hold
7. The trace was allowed to stabilize

#### RESULTS

Worst cases were tested and reported.


**9.1.1. 10dB BANDWIDTH MEASUREMENT**

ANT	Channel	CONFIG	PRF Mode	Packet Length	fM (MHz)	fL (MHz)	fH (MHz)	fc (MHz)	BW (MHz)
Ant1	CH5	SP0	BPRF9	4	6645.43	6237.63	6836.33	6536.98	598.70
		SP1	BPRF9	4	6645.43	6096.20	6895.80	6496.00	799.60
		SP3	BPRF9	4	6099.70	6096.20	6894.30	6495.25	798.10
	CH9	SP0	BPRF9	4	7596.70	7594.20	8379.31	7986.76	785.11
		SP1	BPRF9	4	7597.20	7593.70	8379.81	7986.76	786.11
		SP3	BPRF9	4	7596.70	7594.20	8379.31	7986.76	785.11
Ant2	CH5	SP0	BPRF9	4					
		SP1	BPRF9	4					
		SP3	BPRF9	4					
	CH9	SP0	BPRF9	4	7597.20	7594.20	8379.31	7986.76	785.11
		SP1	BPRF9	4	7952.02	7593.70	8380.31	7987.01	786.61
		SP3	BPRF9	4	7956.02	7594.20	8379.81	7987.01	785.61




### 9.1.2. 10dB BANDWIDTH PLOT

- ANT1

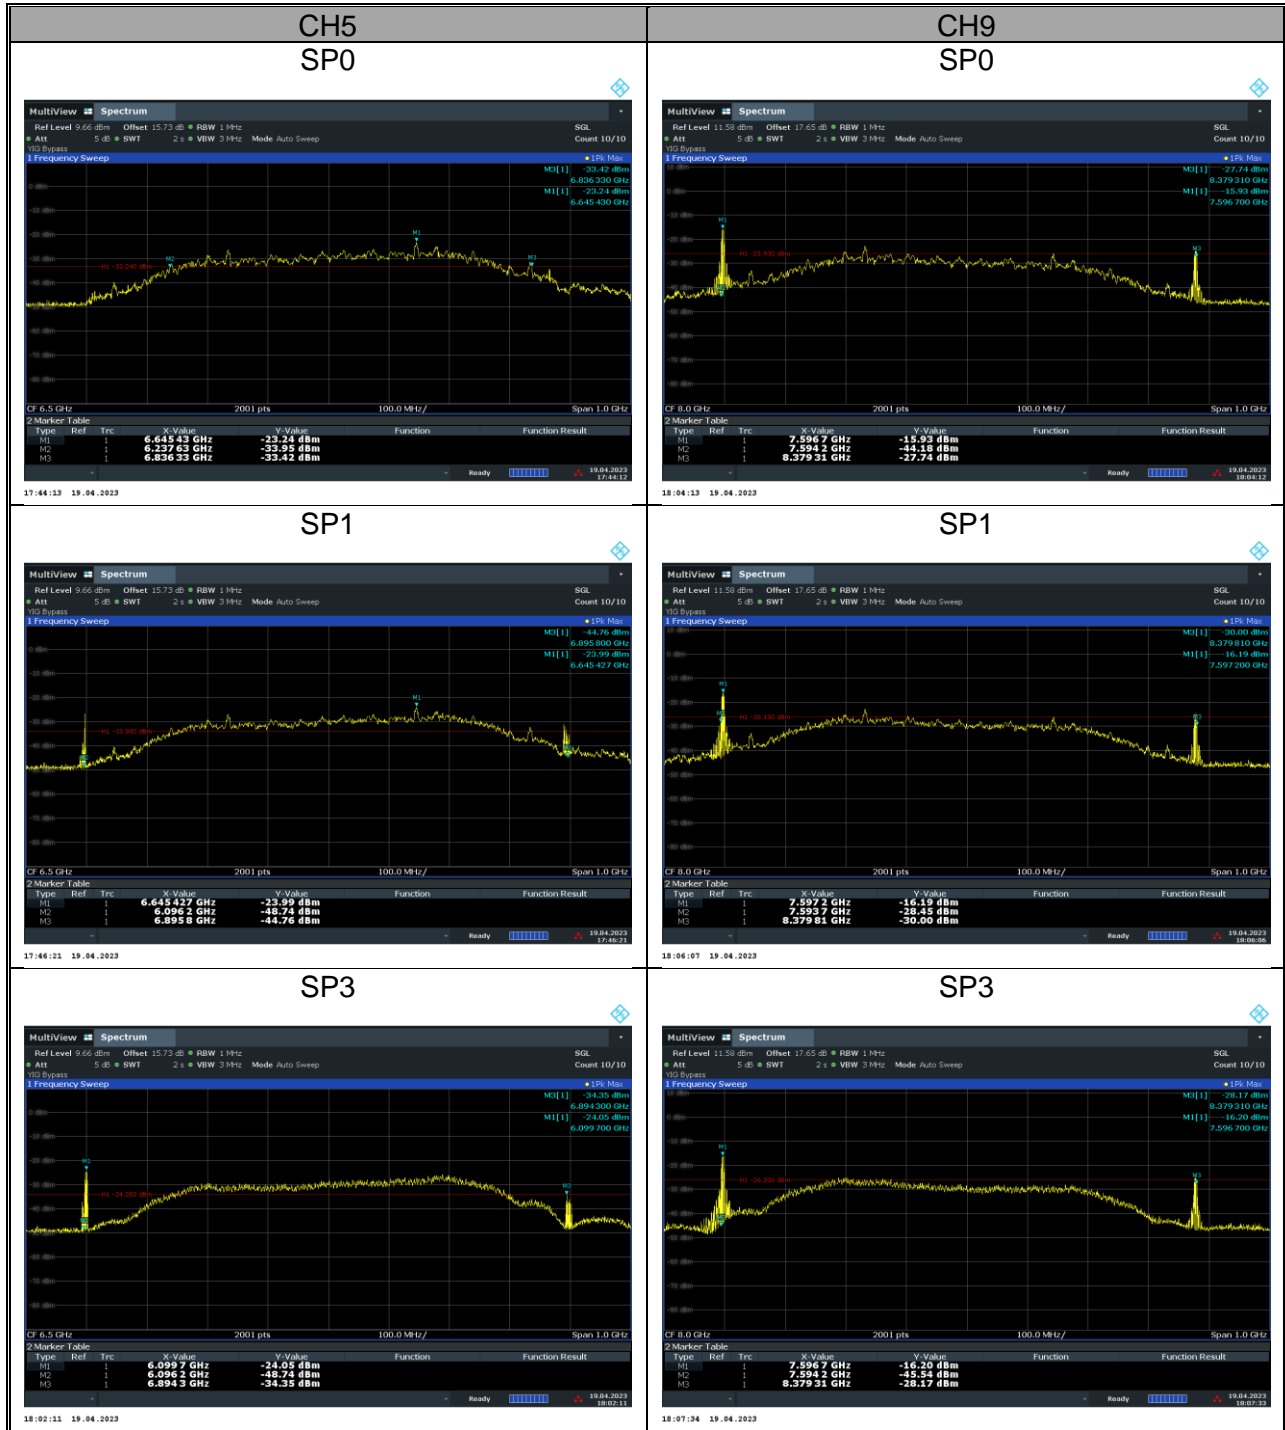

- ANT2

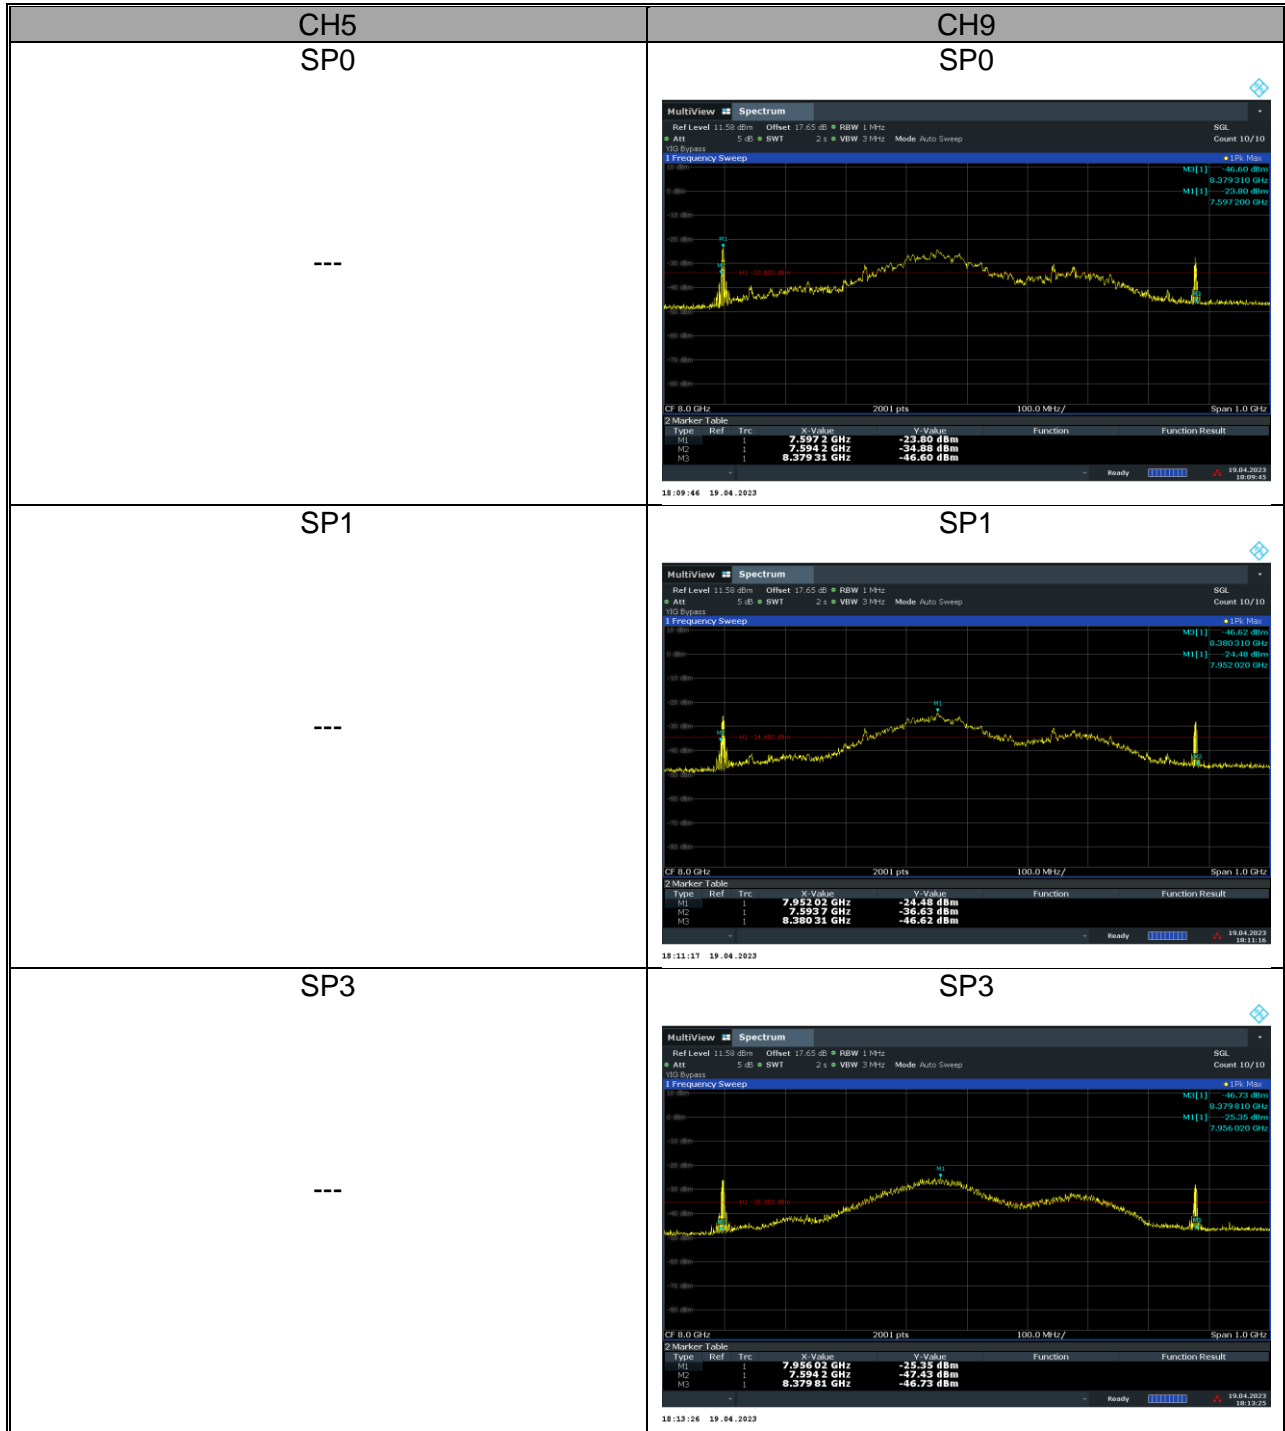

## 9.2. PEAK POWER AND MAXIMUM AVERAGE EMISSIONS

### LIMITS

FCC §15.519

(c) The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency in MHz	EIRP in dBm
3100-10600	-41.3

(e) There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs,  $f_m$ . That limit is 0 dBm EIRP.

### TEST PROCEDURE

ANSI C63.10 Clause 10.3.

Peak EIRP power is measured using RBW of 50 MHz.

The radiated emissions of 6 – 9 GHz frequency band are performed at 3 meter test distance.

### Test Notes

The EIRP in dBm was calculated from the measurement Field Strength in dBuV/m by applying a -95.2dB correction factor to the Field Strength level.

### RESULTS


Plots: worst cases were reported.

**9.2.1. MAXIMUM PEAK AND AVERAGE POWER**


ANT	Channel	CONFIG	PRF Mode	Peak Power (dBm/50MHz)	Peak Limit (dBm/50MHz)	Margin	AV Power (dBm/MHz)	AV Limit (dBm/MHz)	Margin
Ant1 Metal	CH5	SP0	BPRF4	-2.57	0	2.57	-44.37	-41.3	3.07
			BPRF127	-4.77	0	4.77	-43.41	-41.3	2.11
			HPRF127	-10.04	0	10.04	-42.96	-41.3	1.66
		SP1	BPRF4	-3.30	0	3.30	-43.09	-41.3	1.79
			BPRF127	-5.39	0	5.39	-43.15	-41.3	1.85
			HPRF127	-10.66	0	10.66	<b>-42.86</b>	<b>-41.3</b>	<b>1.56</b>
		SP3	BPRF4	-5.46	0	5.46	-43.01	-41.3	1.71
			BPRF127	-6.06	0	6.06	-43.01	-41.3	1.71
			HPRF127	-9.08	0	9.08	-42.95	-41.3	1.65
	CH9	SP0	BPRF4	<b>-1.66</b>	<b>0</b>	<b>1.66</b>	-45.01	-41.3	3.71
			BPRF127	-3.54	0	3.54	-43.36	-41.3	2.06
			HPRF127	-9.41	0	9.41	-43.28	-41.3	1.98
		SP1	BPRF4	-1.72	0	1.72	-43.18	-41.3	1.88
			BPRF127	-3.92	0	3.92	-43.16	-41.3	1.86
			HPRF127	-10.39	0	10.39	-43.24	-41.3	1.94
		SP3	BPRF4	-6.98	0	6.98	-42.95	-41.3	1.65
			BPRF127	-6.92	0	6.92	<b>-42.87</b>	<b>-41.3</b>	<b>1.57</b>
			HPRF127	-6.95	0	6.95	-43.29	-41.3	1.99
Ant2 Patch	CH9	SP0	BPRF4	<b>-3.46</b>	<b>0</b>	<b>3.46</b>	-44.56	-41.3	3.26
			BPRF127	-5.69	0	5.69	-43.55	-41.3	2.25
			HPRF127	-10.24	0	10.24	-43.06	-41.3	1.76
		SP1	BPRF4	-4.12	0	4.12	<b>-42.81</b>	<b>-41.3</b>	<b>1.51</b>
			BPRF127	-6.39	0	6.39	-43.20	-41.3	1.90
			HPRF127	-11.22	0	11.22	-42.90	-41.3	1.60
		SP3	BPRF4	-10.07	0	10.07	-43.27	-41.3	1.97
			BPRF127	-10.05	0	10.05	-43.23	-41.3	1.93
			HPRF127	-11.76	0	11.76	-42.94	-41.3	1.64

**MAXIMUM PEAK AND AVERAGE POWER PLOTS**


**- PEAK POWER  
- ANT1**

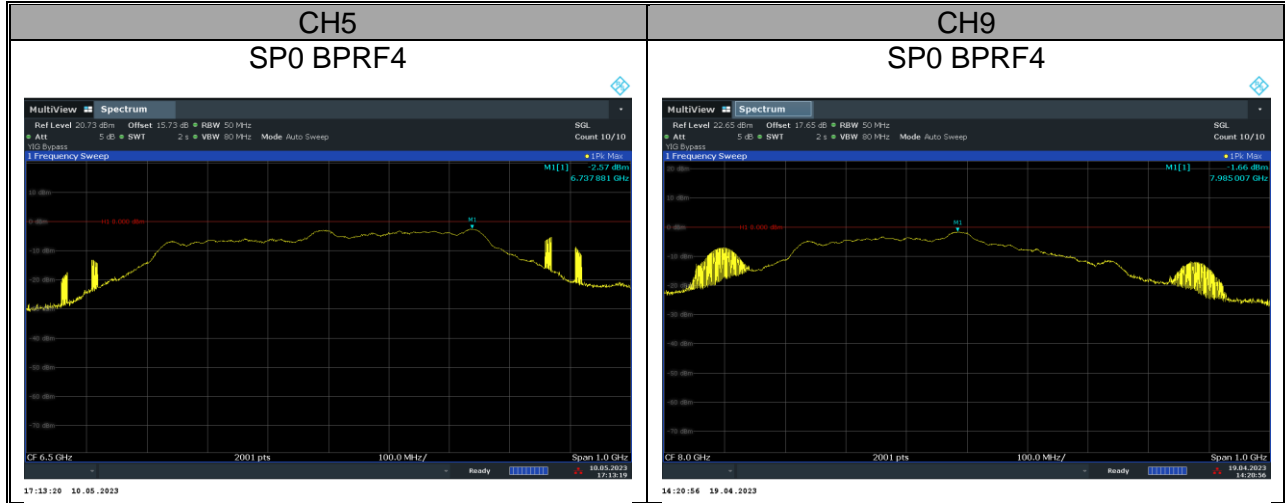


**- ANT2**

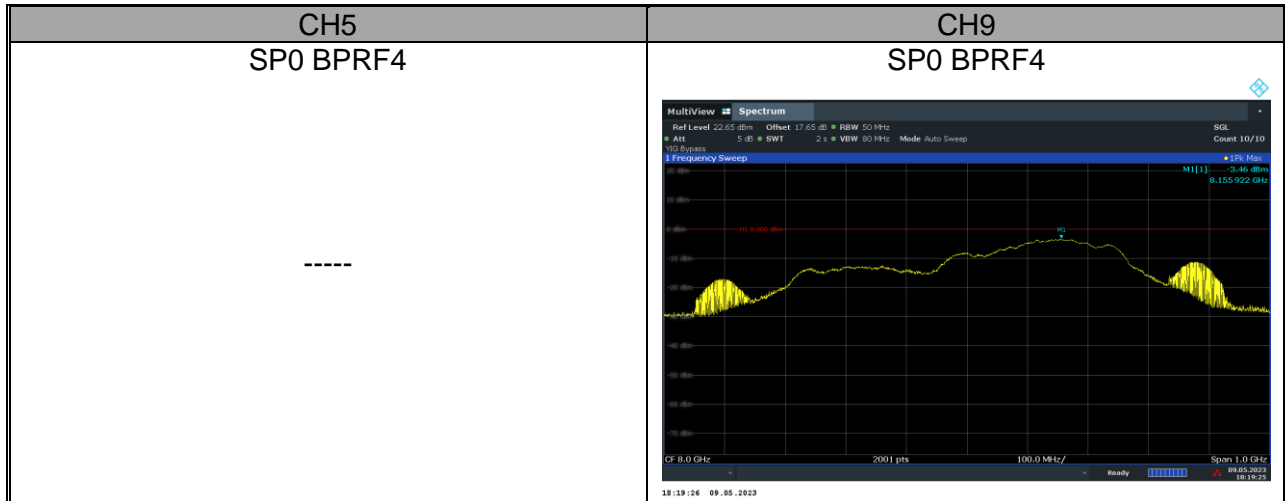

**- AVERAGE POWER**  
**- ANT1**

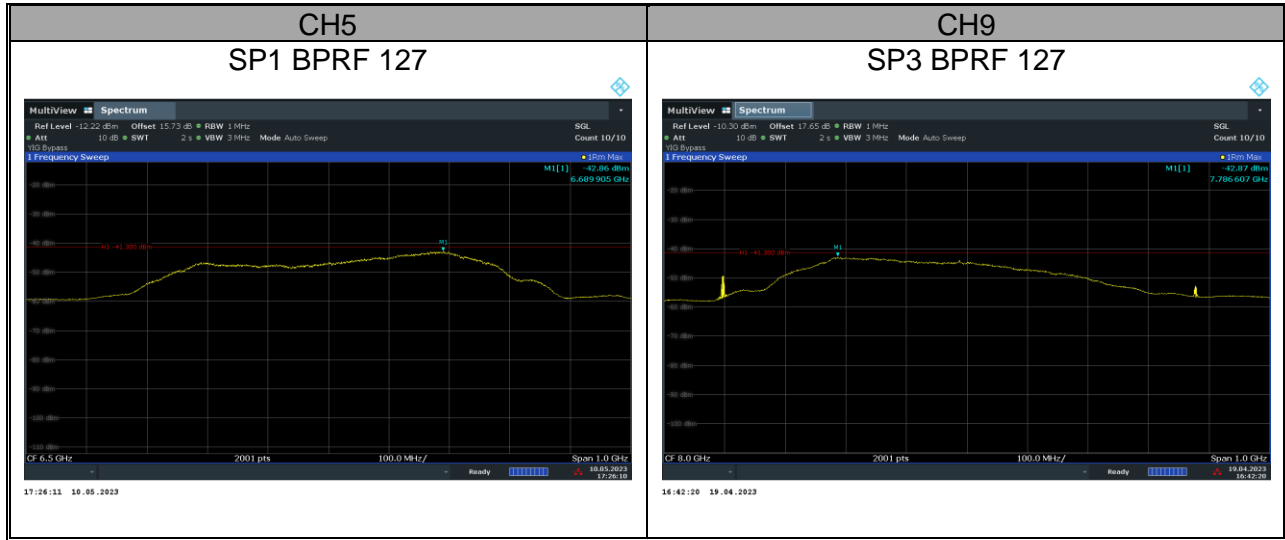

**- ANT2**

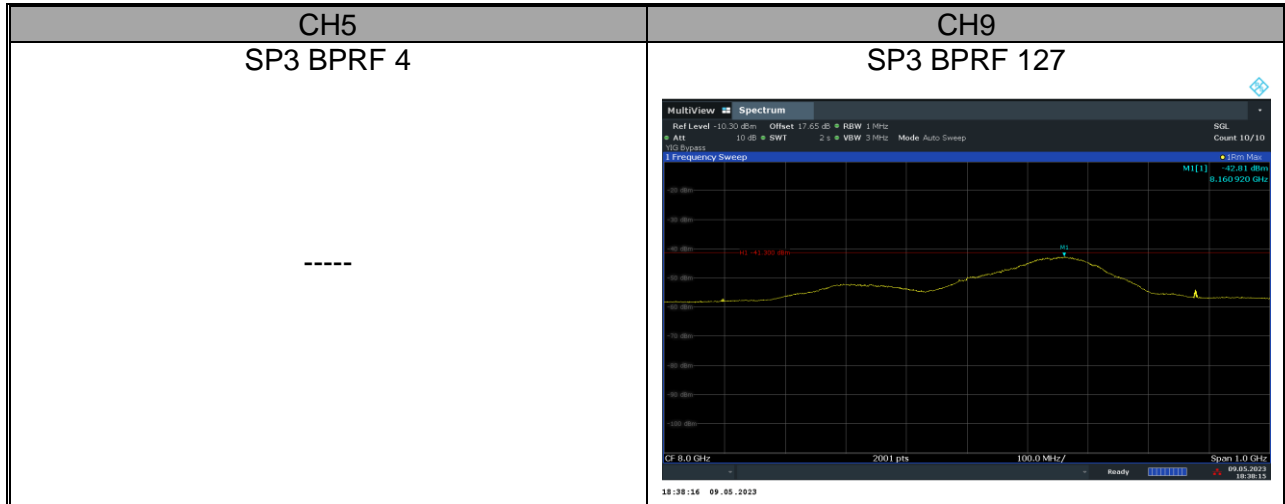

### **9.3. CESSATION TIME**

#### **LIMITS**

FCC §15.519(a)(1)

A UWB device operating under the provisions of this section shall transmit only when it is sending information to an associated receiver. The UWB intentional radiator shall cease transmission within 10 seconds unless it receives an acknowledgement from the associated receiver that its transmission is being received. An acknowledgment of reception must continue to be received by the UWB intentional radiator at least every 10 seconds or the UWB device must cease transmitting.

#### **TEST PROCEDURES**

Transmissions are monitored for two cases:

1. The smart phone ends the UWB link.
2. The EUT ends the UWB link.

#### **RESULTS**

Please see the next page

Case 1: Smart Phone ends the UWB link



Marker 1: Smart phone ends UWB link.

Marker 2Δ1: EUT and smart phone end UWB link.

Marker 3Δ1: “10s” after EUT ends UWB link.

**EUT detects “Smart Phone ends UWB link” and ceases transmitting within 10 seconds.**



Case 2: EUT ends the UWB link



- Marker 1: EUT ends UWB link.
- Marker 2Δ1: EUT and smart phone end UWB link.
- Marker 3Δ1: “10s” after EUT ends UWB link.

**EUT ceases transmitting within 10 seconds.**

## 10. RADIATED TEST RESULTS

### 10.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a): Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

▪ FCC Part 15.519 (c): The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in §15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency range (MHz)	EIRP in dBm
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

▪ FCC Part 15.519 (d): In addition to the radiated emission limits specified in the table in paragraph (c) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency range (MHz)	EIRP in dBm
1164-1240	-85.3
1559-1610	-85.3

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 0.5 or 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz (120kHz for emissions in the GPS), then the video bandwidth is set to 3 MHz (500kHz for emissions in the GPS)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

Radiated test was performed worst case as below table. (Highest Power)


	ANT1	ANT2
CH5	SP0 / BPRF9 / Packet Length 4	-
CH9	SP0 / BPRF9 / Packet Length 4	SP0 / BPRF9 / Packet Length 4

## 10.2. TRANSMITTER ABOVE 1 GHz


### 10.2.1. SPURIOUS EMISSION 1 GHz – 6 GHz TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

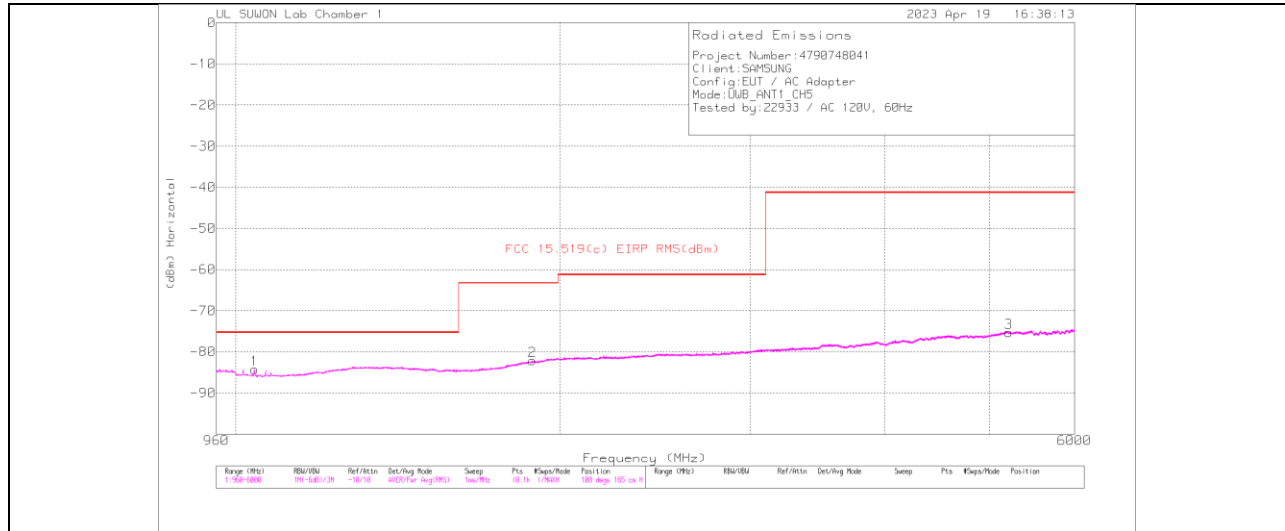

#### VERTICAL RESULT

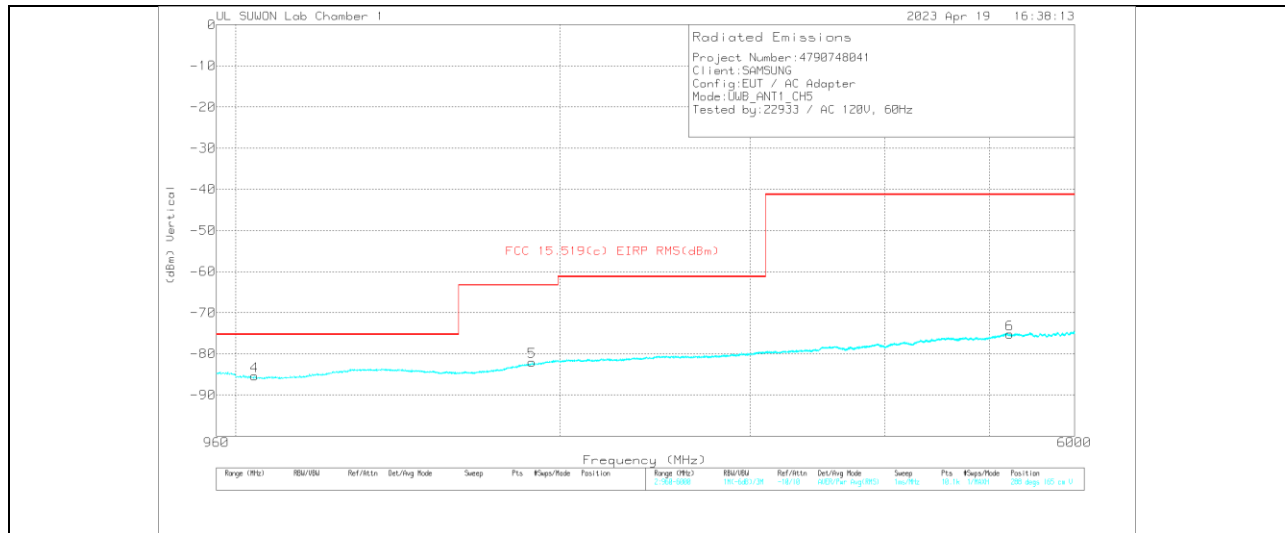


#### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	FCC 15.519(c) ERP RMS(dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1041.3386	-69.17	RMS	27.8	-39.7	-15.6	11.8	.6	-84.27	-75.3	-8.97	288	165	H
2	1885.6636	-71	RMS	30.6	-38.7	-15.6	11.8	.7	-82.2	-63.3	-18.9	324	165	H
3	5213.8108	-75.09	RMS	34.5	-33.1	-15.6	11.8	2.2	-75.29	-41.3	-33.99	180	165	H
4	1041.3386	-70.3	RMS	27.8	-39.7	-15.6	11.8	.6	-85.4	-75.3	-10.1	0	165	V
5	1883.6675	-70.77	RMS	30.6	-38.7	-15.6	11.8	.7	-81.97	-63.3	-18.67	72	165	V
6	5227.0345	-75.11	RMS	34.5	-33	-15.6	11.8	2.2	-75.21	-41.3	-33.91	288	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

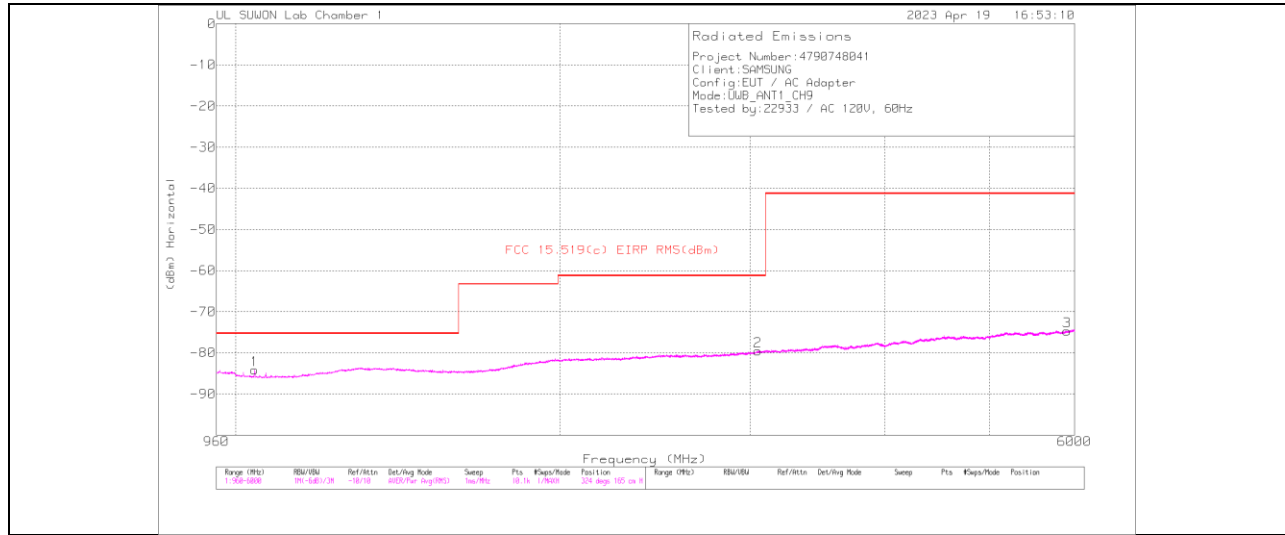

**VERTICAL RESULT**

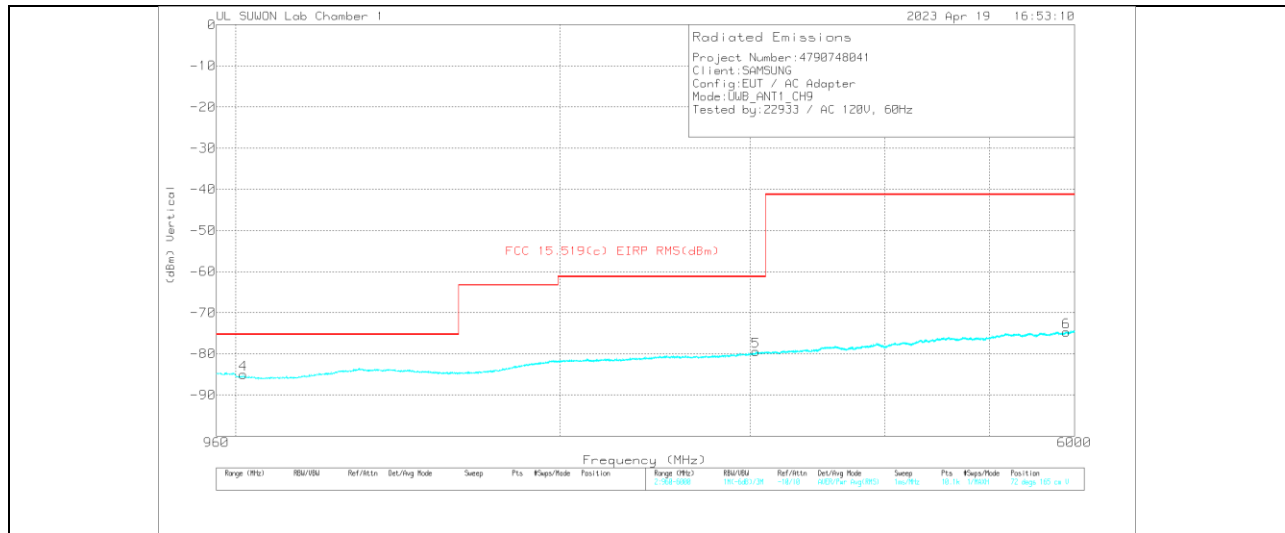

**Trace Markers**


Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.98-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LFF	Corrected Reading (dBm)	FCC 15.519(c) ERP RMS(dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1041.8376	-69.1	RMS	27.8	-39.7	-15.6	11.8	.6	-84.2	-75.3	-8.9	288	165	H
2	3051.3509	-72.37	RMS	32.8	-37	-15.6	11.8	.8	-79.57	-61.3	-18.27	216	165	H
3	5905.6881	-76.22	RMS	35	-31.9	-15.6	11.8	2.2	-74.72	-41.3	-33.42	36	165	H
4	1016.8871	-70.08	RMS	28	-39.7	-15.6	11.8	.6	-84.98	-75.3	-8.68	252	165	V
5	3039.3747	-72.17	RMS	32.8	-37.1	-15.6	11.8	.8	-79.47	-61.3	-18.17	324	165	V
6	5894.7099	-76.16	RMS	35	-31.9	-15.6	11.8	2.2	-74.66	-41.3	-33.36	144	165	V

RMS - RMS detection


**TX Antenna 2**

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

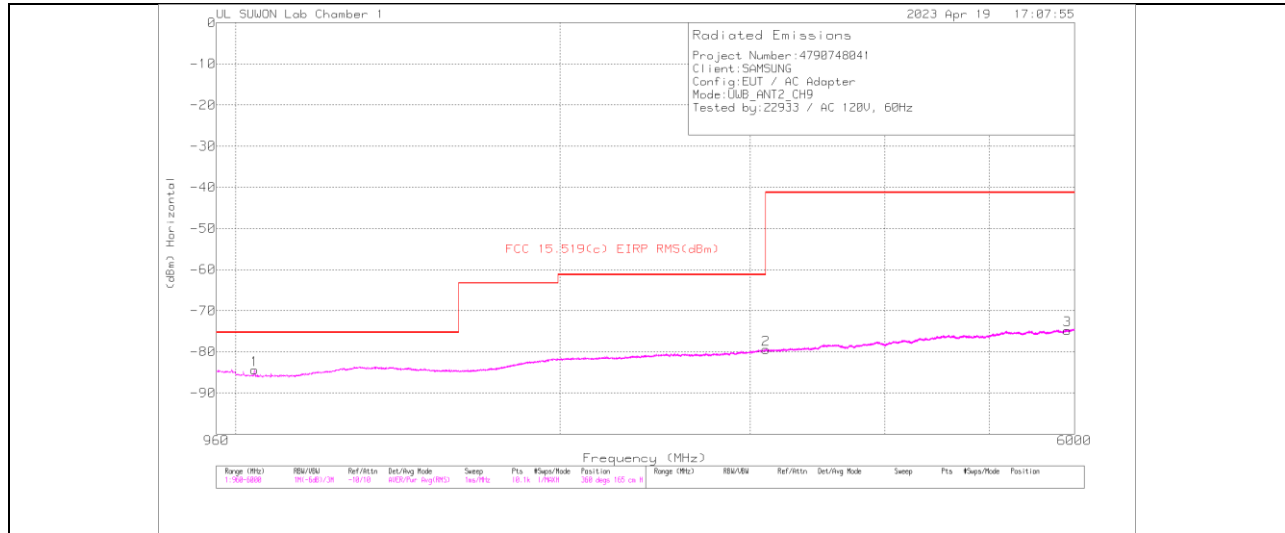

**VERTICAL RESULT**

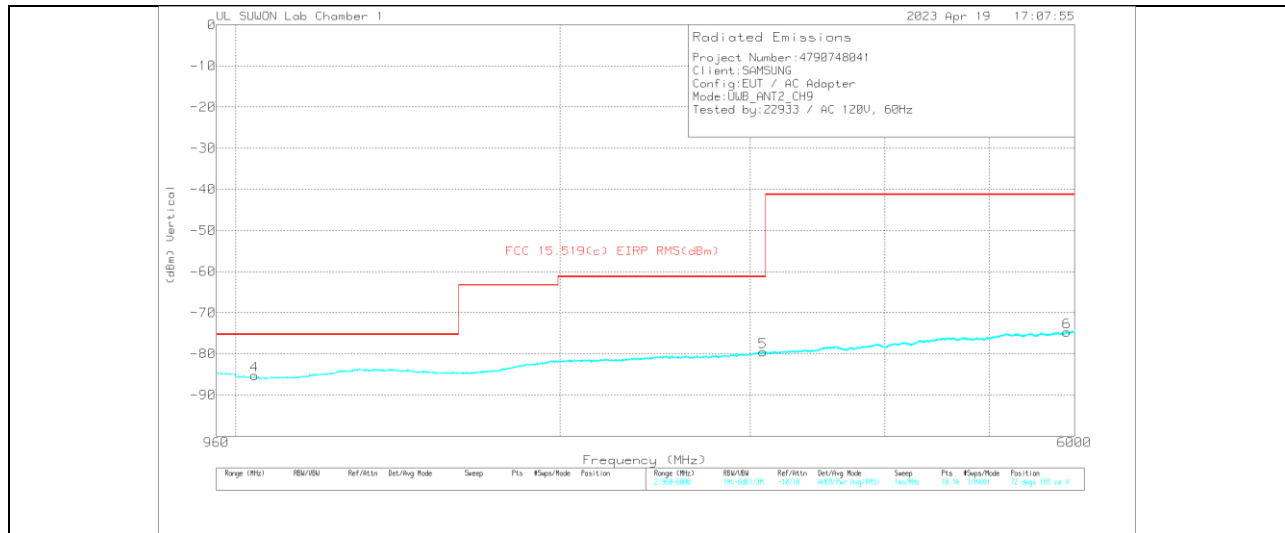

**Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBm)	Det	3117_00168717	0.98-18GHz[dB]	Dist. Cor. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	FCC 15.519(c) ERP RMS(dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1041.8376	-69.32	RMS	27.8	-39.7	-15.6	11.8	.6	-84.42	-75.3	-9.12	288	165	H
2	3103.747	-72.37	RMS	32.9	-37	-15.6	11.8	.8	-79.47	-41.3	-38.17	72	165	H
3	5911.1772	-76.27	RMS	35	-31.9	-15.6	11.8	2.2	-74.77	-41.3	-33.47	324	165	H
4	1041.8376	-70.18	RMS	27.8	-39.7	-15.6	11.8	.6	-85.28	-75.3	-9.98	324	165	V
5	3084.2856	-72.35	RMS	32.9	-37.1	-15.6	11.8	.8	-79.55	-61.3	-18.25	144	165	V
6	5904.6901	-76.19	RMS	35	-31.9	-15.6	11.8	2.2	-74.69	-41.3	-33.39	72	165	V


RMS - RMS detection

### 10.2.2. SPURIOUS EMISSION 9 GHz – 18 GHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

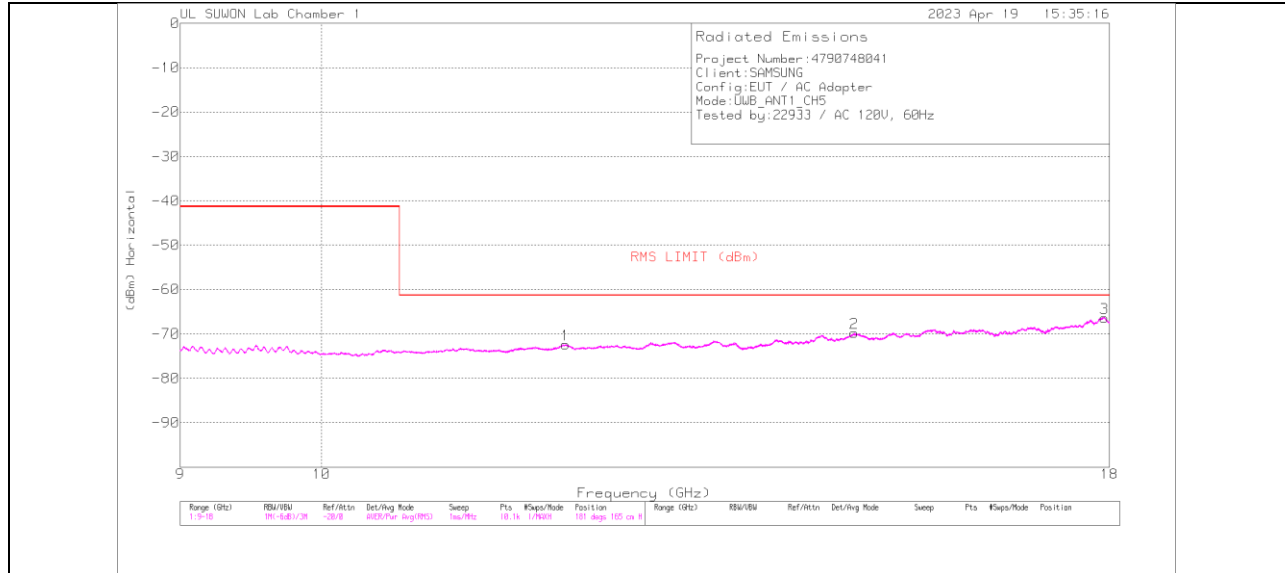

#### VERTICAL RESULT

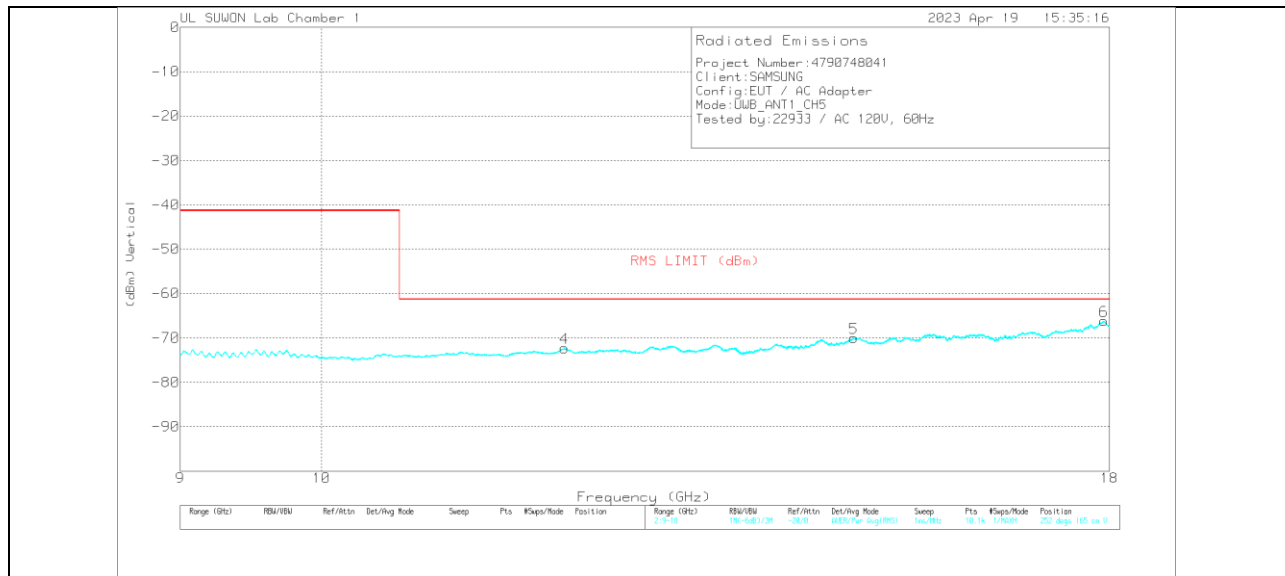

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-10GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	11.99584	-80.54	RMS	39	-27.1	-15.6	11.8	.1	-72.34	-61.3	-11.04	109	165	H
2	14.88119	-82.21	RMS	40.1	-23.9	-15.6	11.8	0	-69.81	-61.3	-8.51	217	165	H
3	17.93317	-86.44	RMS	41.3	-17.6	-15.6	11.8	.2	-66.34	-61.3	-5.04	288	165	H
4	11.98871	-80.31	RMS	38.9	-27.2	-15.6	11.8	.1	-72.31	-61.3	-11.01	324	165	V
5	14.87762	-82.43	RMS	40.1	-23.9	-15.6	11.8	0	-70.03	-61.3	-8.73	0	165	V
6	17.92693	-86.4	RMS	41.3	-17.5	-15.6	11.8	.2	-66.2	-61.3	-4.9	0	165	V

RMS - RMS detection




**CHANNEL, CH 9**

**HORIZONTAL RESULT**

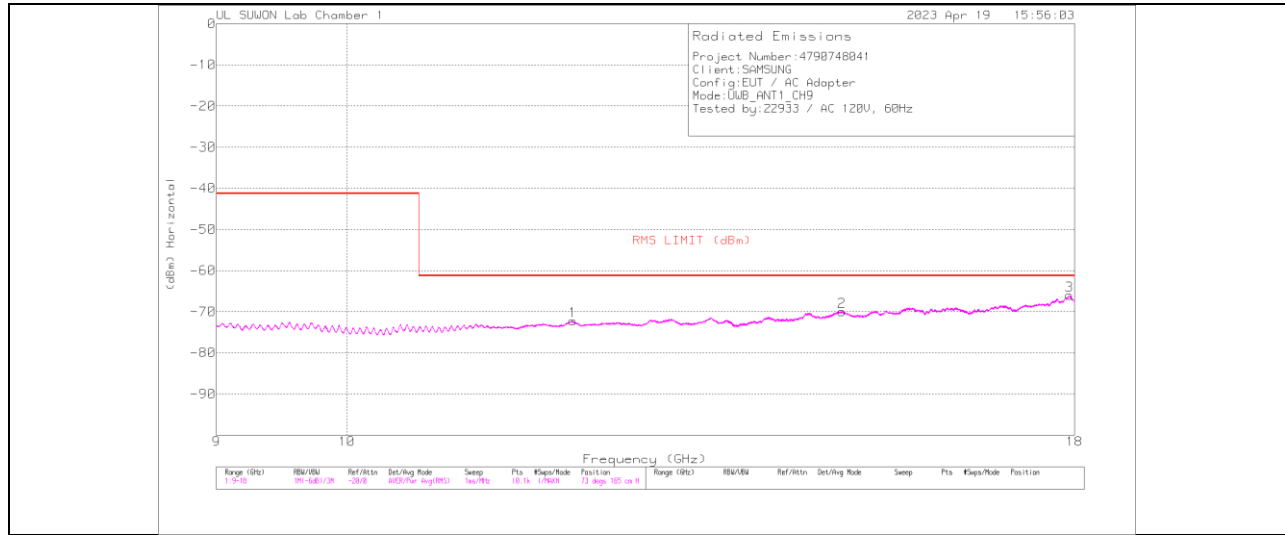

**VERTICAL RESULT**

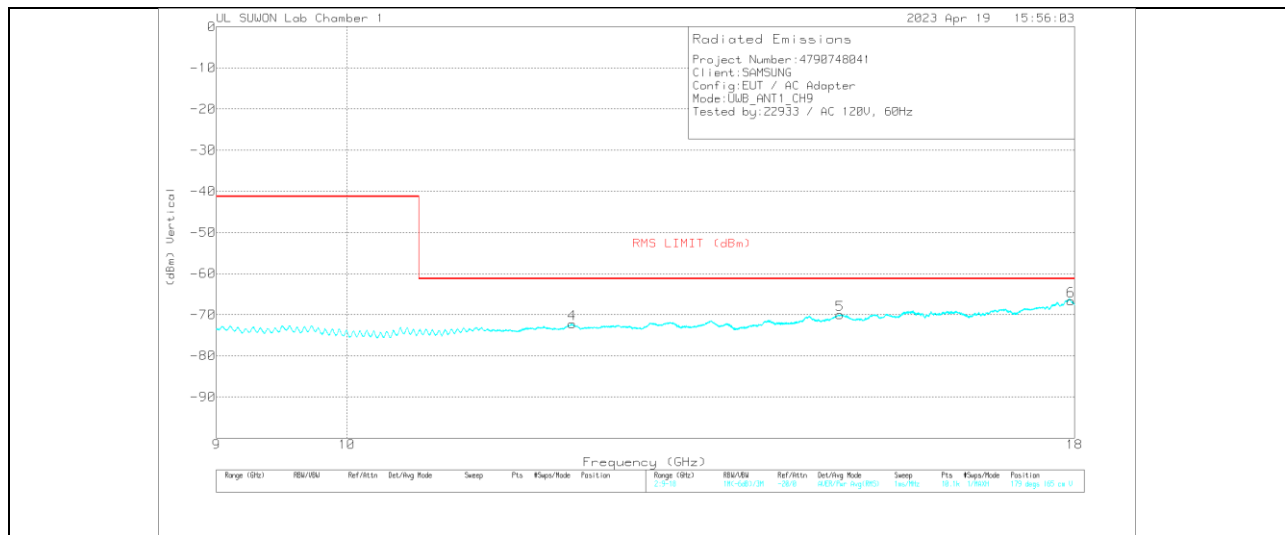

**Trace Markers**


Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	12.0003	-80.54	RMS	39	-27	-15.6	11.8	.1	-72.24	-61.3	-10.94	73	165	H
2	14.91505	-82.83	RMS	40.1	-23.5	-15.6	11.8	0	-70.03	-61.3	-8.73	36	165	H
3	17.92604	-86.23	RMS	41.3	-17.5	-15.6	11.8	.2	-66.03	-61.3	-4.73	144	165	H
4	11.99495	-80.46	RMS	39	-27.1	-15.6	11.8	.1	-72.26	-61.3	-10.96	36	165	V
5	14.89366	-82.59	RMS	40.1	-23.7	-15.6	11.8	0	-69.99	-61.3	-8.69	252	165	V
6	17.94742	-86.22	RMS	41.3	-18	-15.6	11.8	.1	-66.62	-61.3	-5.32	179	165	V

RMS - RMS detection


**TX Antenna 2**

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

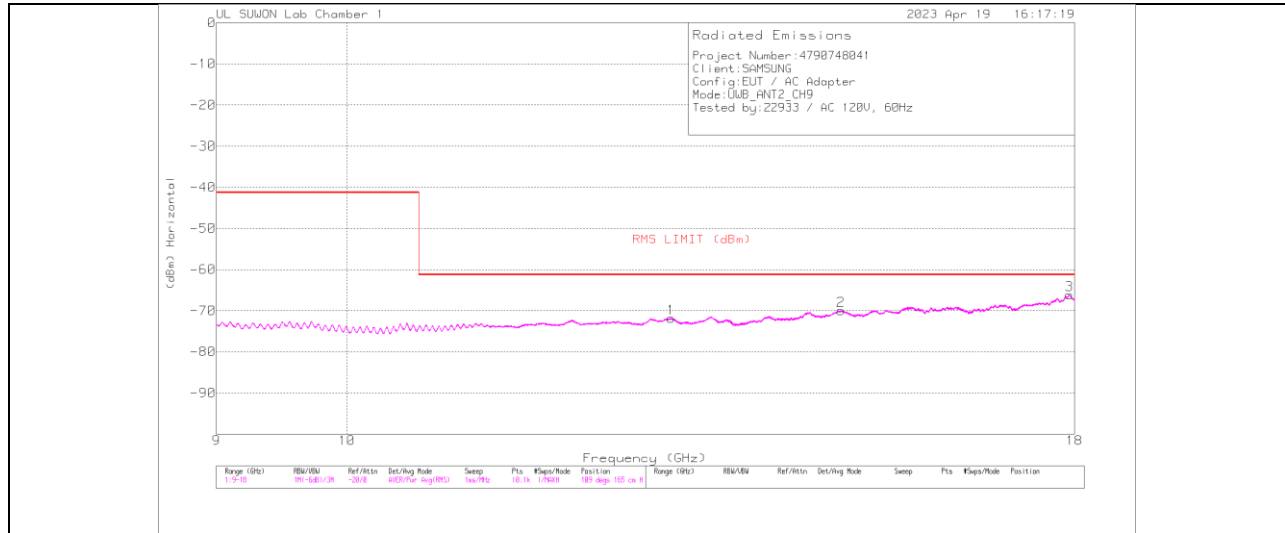

**VERTICAL RESULT**

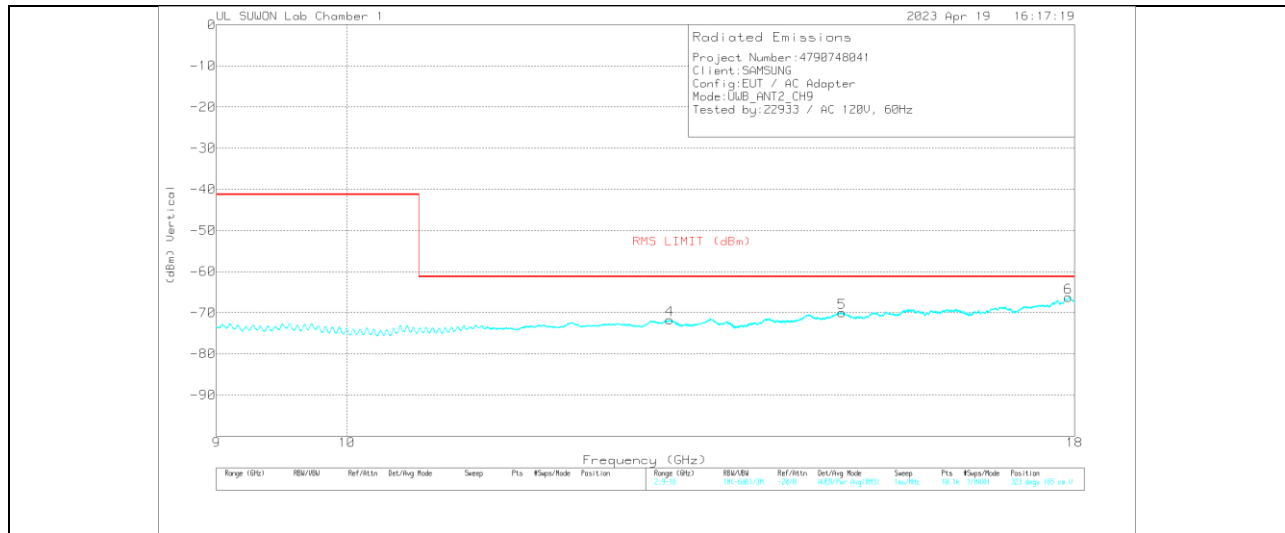

**Trace Markers**

Marker	Frequency (GHz)	Marker Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_HPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	12.99297	-80.42	RMS	38.9	-26.6	-15.6	11.8	.1	-71.82	-61.3	-10.52	145	165	H
2	14.90792	-82.84	RMS	40.1	-23.5	-15.6	11.8	0	-70.04	-61.3	-8.74	253	165	H
3	17.92782	-86.3	RMS	41.3	-17.5	-15.6	11.8	.2	-66.1	-61.3	-4.8	216	165	H
4	12.98049	-80.46	RMS	38.9	-26.5	-15.6	11.8	.1	-71.76	-61.3	-10.46	36	165	V
5	14.91505	-82.78	RMS	40.1	-23.5	-15.6	11.8	0	-69.98	-61.3	-8.68	108	165	V
6	17.91267	-86.26	RMS	41.3	-17.7	-15.6	11.8	.2	-66.26	-61.3	-4.96	215	165	V


RMS - RMS detection

### 10.2.3. SPURIOUS EMISSION 18 GHz – 40 GHz


#### TX Antenna 1

#### CHANNEL, CH 5

#### HORIZONTAL RESULT

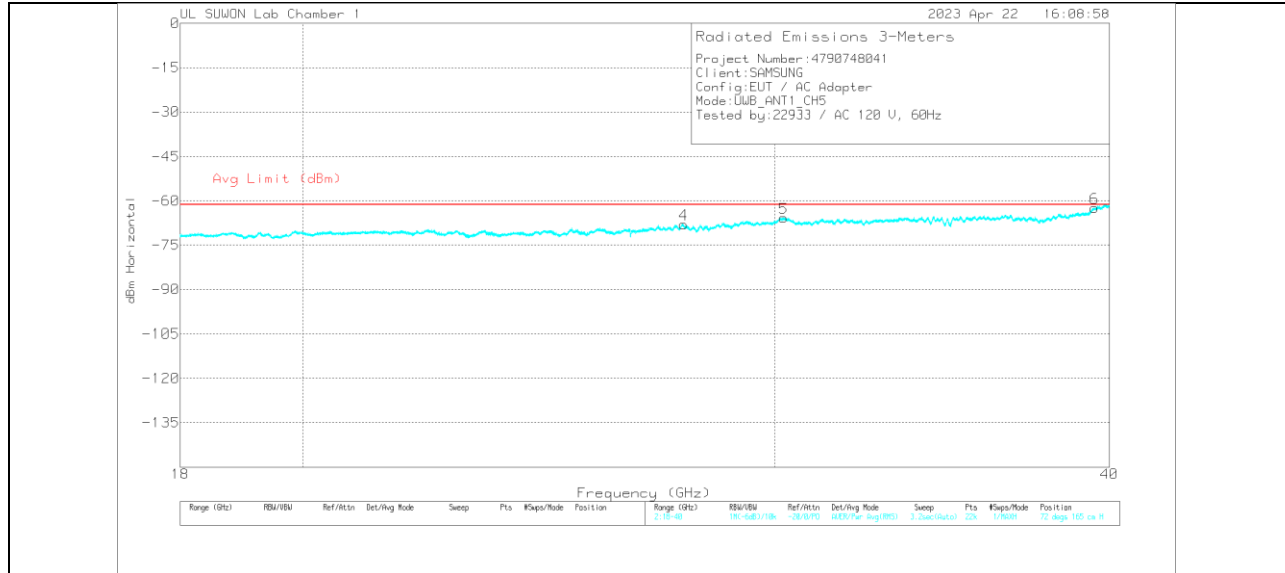

#### VERTICAL RESULT

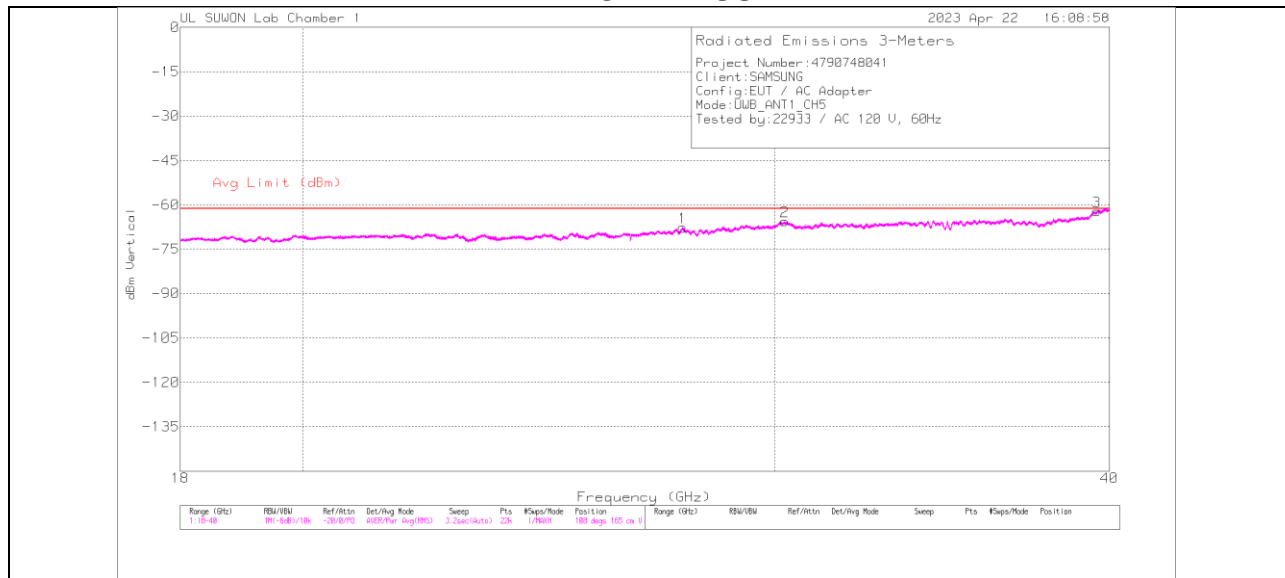


#### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz(dB)	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	27.72456	-93.21	RMS	10.4	18.9	11.8	-15.6	-67.71	-61.3	-6.41	216	165	V
2	30.25445	-95.08	RMS	13.5	19.8	11.8	-15.6	-65.58	-61.3	-4.28	288	165	V
3	39.55703	-93.52	RMS	12.2	23	11.8	-15.6	-62.12	-61.3	-0.82	180	165	V
4	27.74656	-93.61	RMS	10.5	19	11.8	-15.6	-67.91	-61.3	-6.61	36	165	H
5	30.23545	-95.22	RMS	13.5	19.8	11.8	-15.6	-65.72	-61.3	-4.42	216	165	H
6	39.49003	-93.78	RMS	12.1	23.1	11.8	-15.6	-62.38	-61.3	-1.08	252	165	H


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

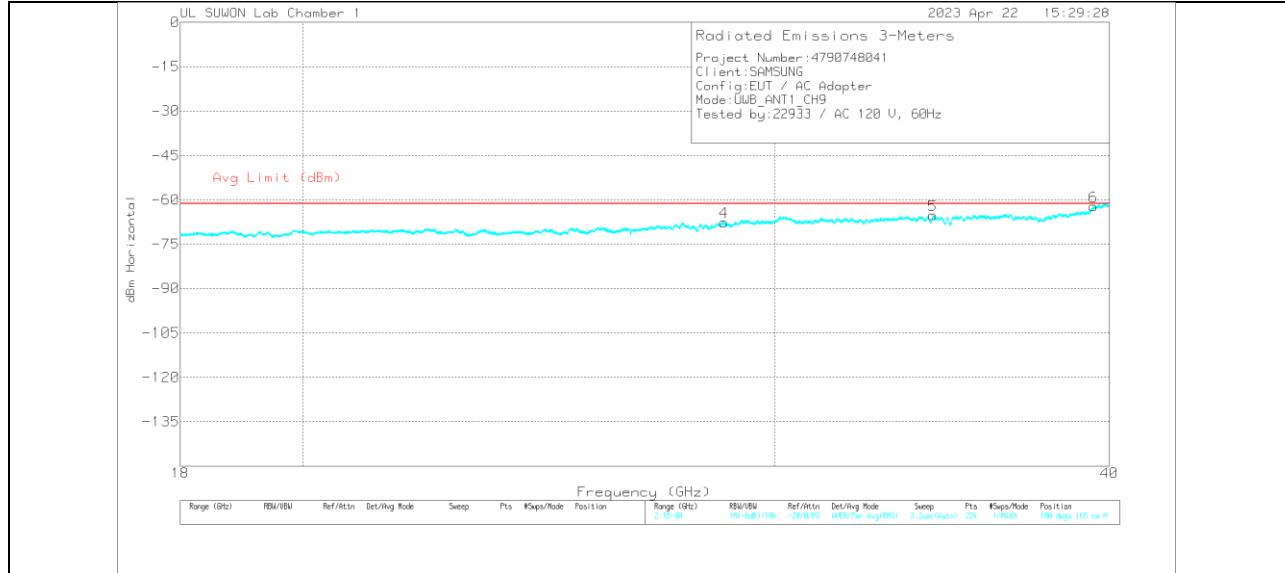

**VERTICAL RESULT**

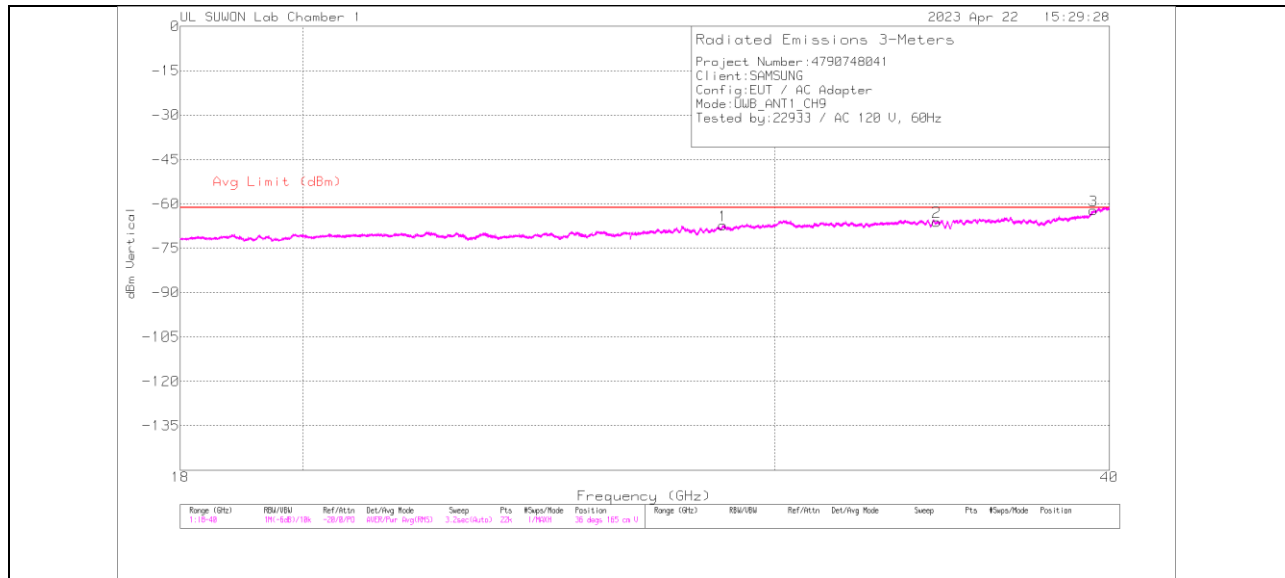

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz(dB)	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	28.69452	-94.79	RMS	12.2	19.2	11.8	-15.6	-67.19	-61.3	-5.89	324	165	V
2	34.48126	-95.74	RMS	12.1	21.4	11.8	-15.6	-66.04	-61.3	-4.74	216	165	V
3	39.45403	-93.53	RMS	12	23.2	11.8	-15.6	-62.13	-61.3	-0.83	72	165	V
4	28.72652	-95.23	RMS	12.2	19.3	11.8	-15.6	-67.53	-61.3	-6.23	72	165	H
5	34.36326	-94.74	RMS	12	21.3	11.8	-15.6	-65.24	-61.3	-3.94	324	165	H
6	39.44703	-93.62	RMS	12	23.2	11.8	-15.6	-62.22	-61.3	-0.92	216	165	H

RMS - RMS detection


**TX Antenna 2**

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

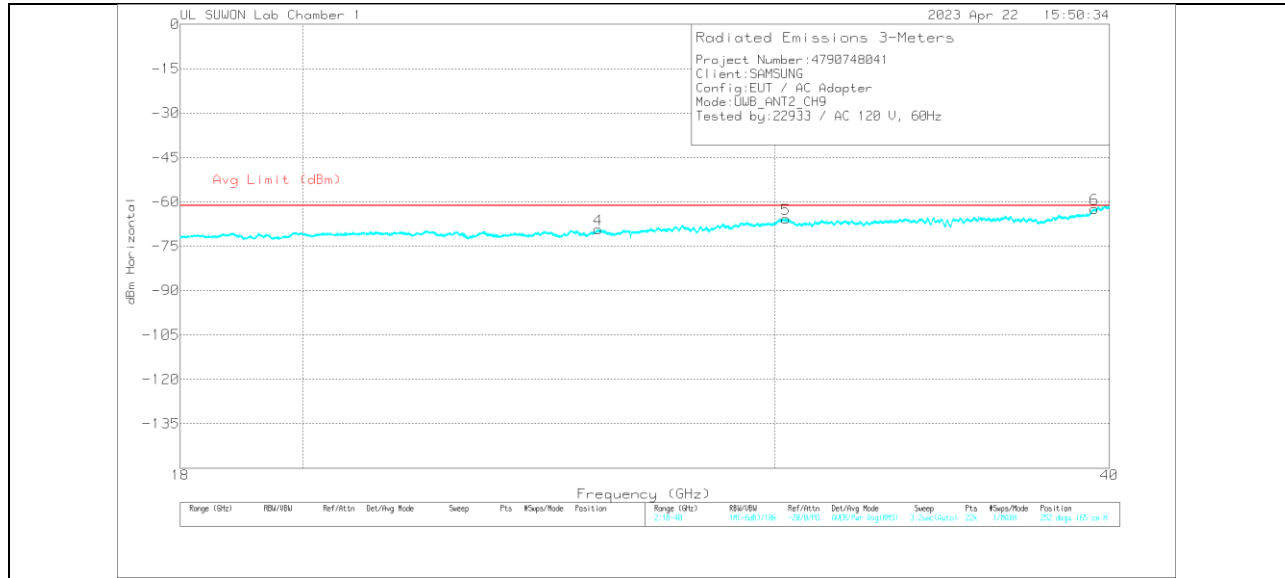

**VERTICAL RESULT**

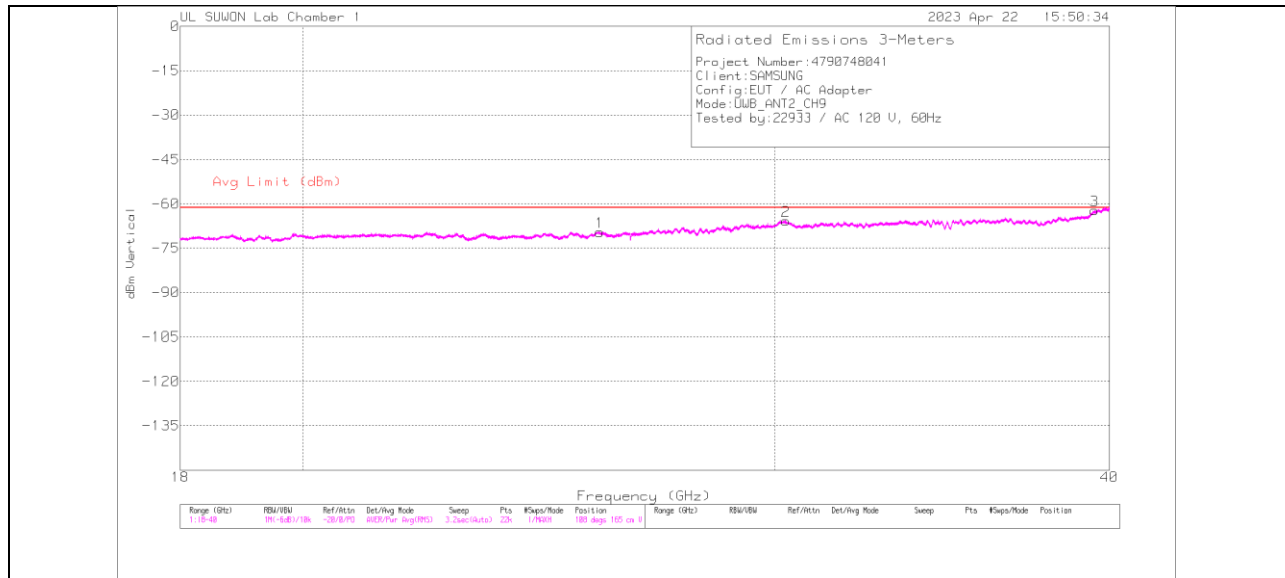

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz(dB)	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading dBm	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	25.80965	-91.38	RMS	7.4	18.2	11.8	-15.6	-69.58	-61.3	-8.28	324	165	V
2	30.29345	-95.14	RMS	13.4	19.8	11.8	-15.6	-65.74	-61.3	-4.44	72	165	V
3	39.49303	-93.64	RMS	12.1	23.1	11.8	-15.6	-62.24	-61.3	-0.94	216	165	V
4	25.77765	-91.17	RMS	7.4	18.2	11.8	-15.6	-69.37	-61.3	-8.07	216	165	H
5	30.28445	-95.18	RMS	13.4	19.9	11.8	-15.6	-65.68	-61.3	-4.38	288	165	H
6	39.49003	-93.72	RMS	12.1	23.1	11.8	-15.6	-62.32	-61.3	-1.02	180	165	H


RMS - RMS detection

### 10.2.4. SPURIOUS EMISSION 1164 MHz – 1240 MHz


**TX Antenna 1**

**CHANNEL, CH 5**

#### HORIZONTAL RESULT

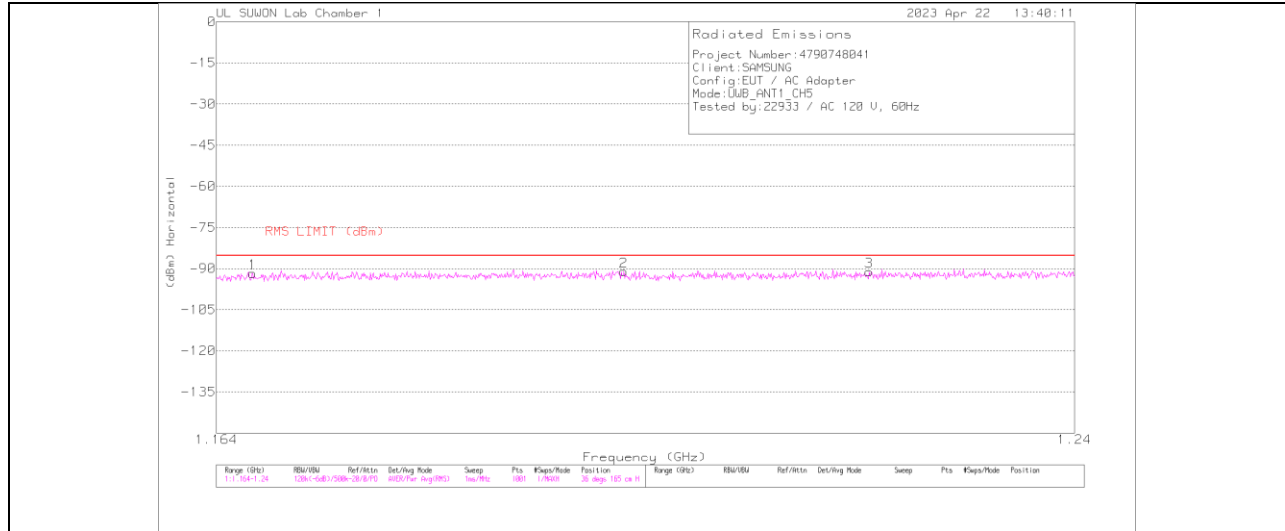

#### VERTICAL RESULT

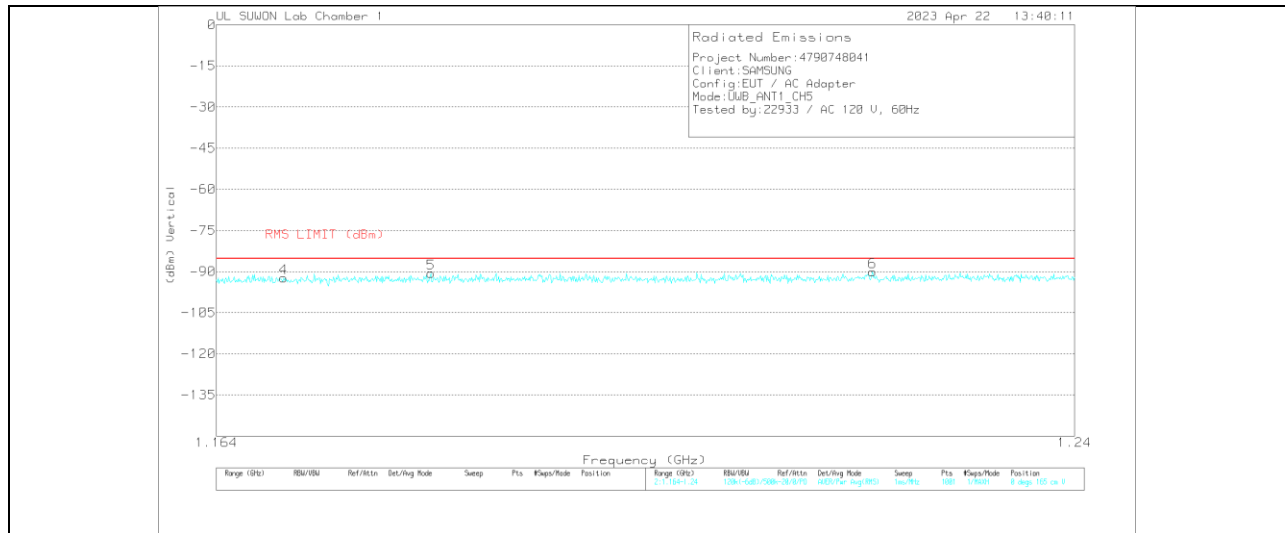


**Trace Markers**

Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.16712	-76.97	RMS	28.1	-39.6	-15.6	11.8	.6	-91.67	-85.3	-6.37	324	165	H
2	1.19949	-76.58	RMS	28.4	-39.6	-15.6	11.8	.6	-90.98	-85.3	-5.68	144	165	H
3	1.22138	-77.01	RMS	28.7	-39.6	-15.6	11.8	.6	-91.11	-85.3	-5.81	72	165	H
4	1.16978	-77.57	RMS	28.1	-39.6	-15.6	11.8	.6	-92.27	-85.3	-6.97	108	165	V
5	1.18254	-76.11	RMS	28.2	-39.6	-15.6	11.8	.6	-90.71	-85.3	-5.41	216	165	V
6	1.22168	-76.03	RMS	28.7	-39.6	-15.6	11.8	.6	-90.13	-85.3	-4.83	144	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

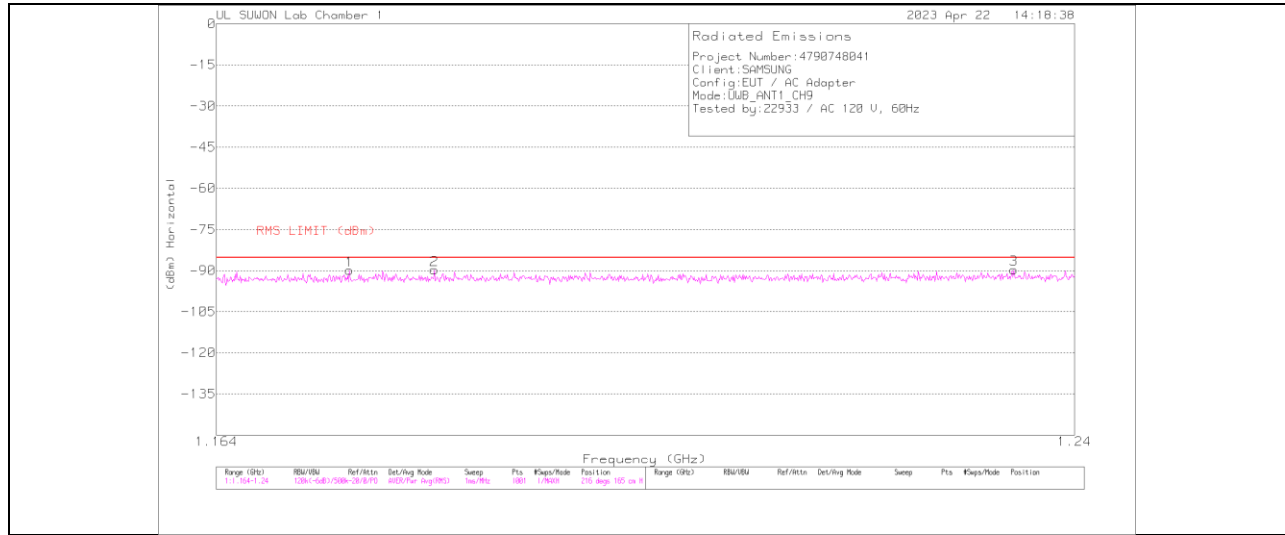

**VERTICAL RESULT**

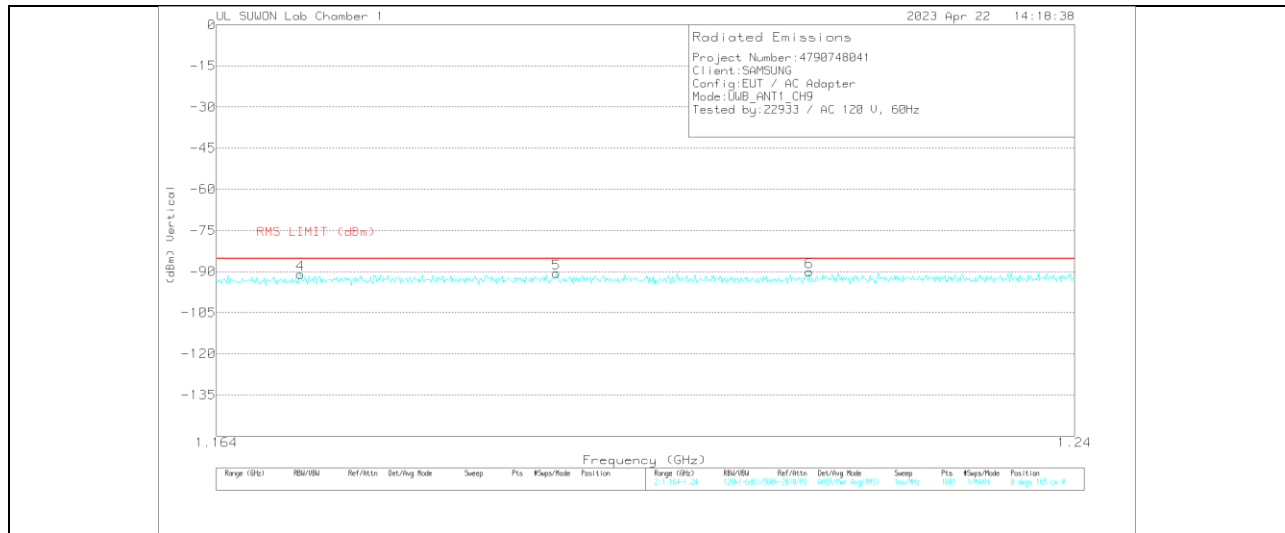

**Trace Markers**


Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17548	-75.2	RMS	28.2	-39.6	-15.6	11.8	.5	-89.9	-85.3	-4.6	216	165	H
2	1.18285	-75.07	RMS	28.2	-39.6	-15.6	11.8	.5	-89.77	-85.3	-4.47	360	165	H
3	1.23445	-75.62	RMS	28.9	-39.6	-15.6	11.8	.5	-89.62	-85.3	-4.32	216	165	H
4	1.17122	-76.2	RMS	28.1	-39.6	-15.6	11.8	.5	-91	-85.3	-5.7	108	165	V
5	1.19356	-76.2	RMS	28.4	-39.6	-15.6	11.8	.5	-90.7	-85.3	-5.4	216	165	V
6	1.21598	-75.81	RMS	28.6	-39.6	-15.6	11.8	.5	-90.11	-85.3	-4.81	108	165	V

RMS - RMS detection


**TX Antenna 2**

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

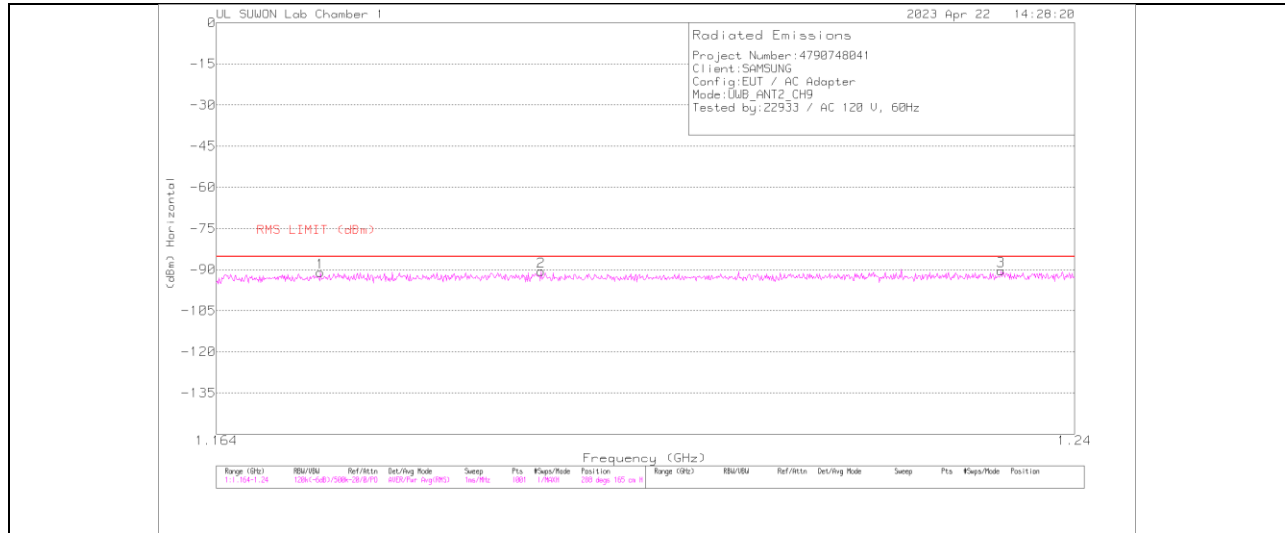

**VERTICAL RESULT**

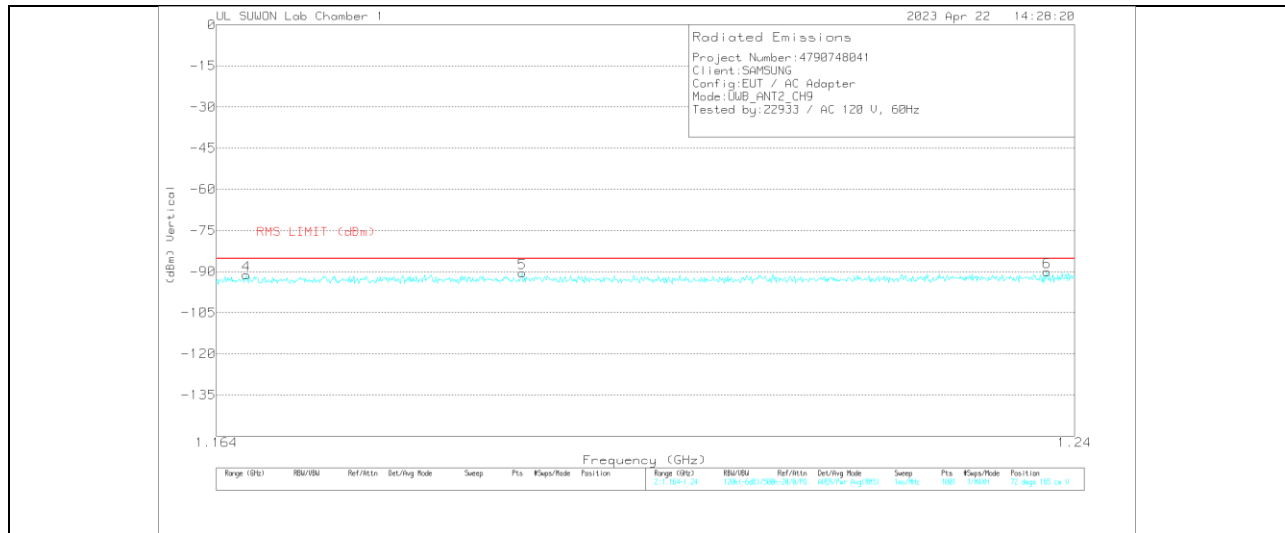

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH9_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.17297	-76.2	RMS	28.1	-39.6	-15.6	11.8	.5	-91	-85.3	-5.7	252	165	H
2	1.1922	-75.97	RMS	28.3	-39.6	-15.6	11.8	.5	-90.57	-85.3	-5.27	144	165	H
3	1.23331	-76.58	RMS	28.9	-39.5	-15.6	11.8	.5	-90.48	-85.3	-5.18	144	165	H
4	1.16658	-76.38	RMS	28.1	-39.6	-15.6	11.8	.5	-91.18	-85.3	-5.88	288	165	V
5	1.19052	-75.91	RMS	28.3	-39.6	-15.6	11.8	.5	-90.51	-85.3	-5.21	180	165	V
6	1.23749	-76.13	RMS	28.9	-39.6	-15.6	11.8	.5	-90.13	-85.3	-4.83	216	165	V

RMS - RMS detection




### 10.2.5. SPURIOUS EMISSION 1559 MHz – 1610 MHz


**TX Antenna 1**

**CHANNEL, CH 5**

#### HORIZONTAL RESULT

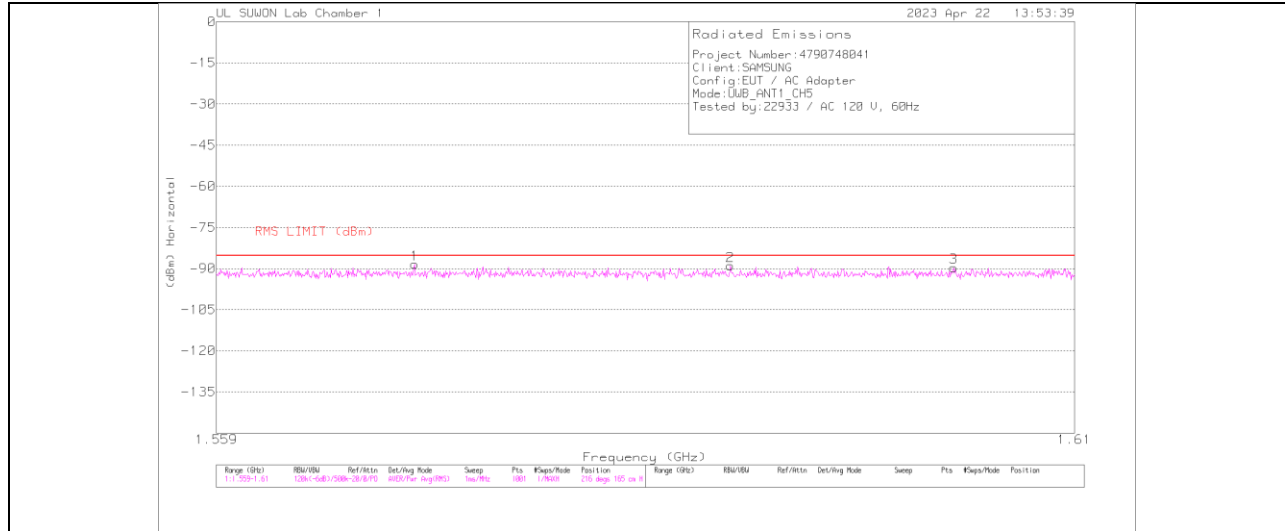

#### VERTICAL RESULT

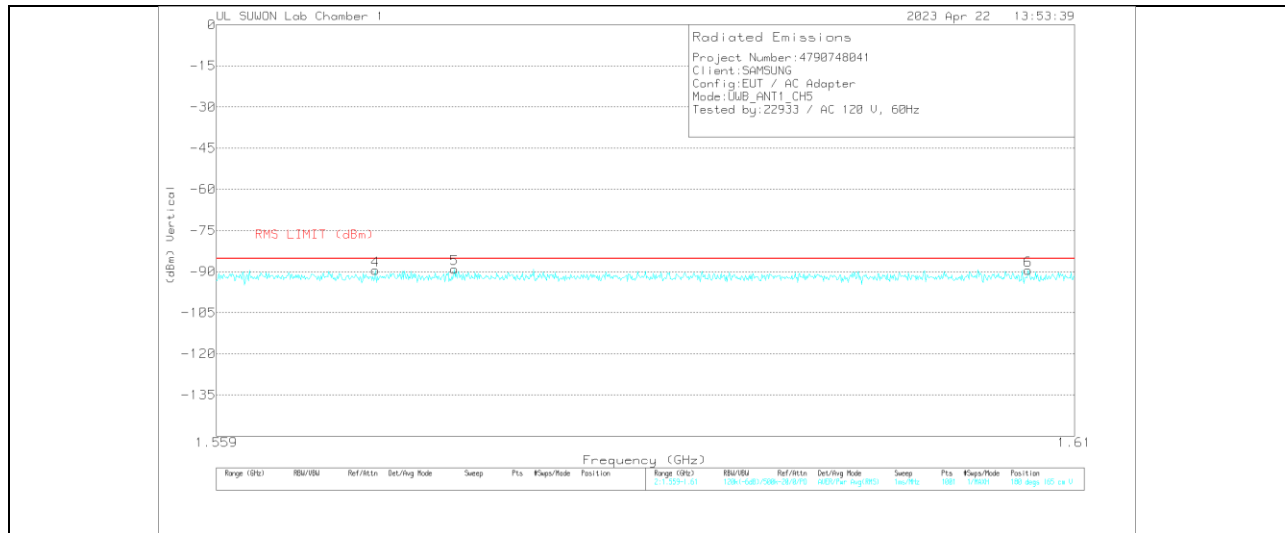


**Trace Markers**

Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz(dB)	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Deg)	Height (cm)	Polarity
1	1.57063	-74.04	RMS	28.5	-39.1	-15.6	11.8	.6	-89.44	-85.3	-3.14	36	165	H
2	1.58935	-75.29	RMS	28.5	-39	-15.6	11.8	.7	-89.89	-85.3	-3.59	108	165	H
3	1.60271	-75.92	RMS	28.5	-39.1	-15.6	11.8	.7	-89.62	-85.3	-4.32	144	165	H
4	1.56833	-75.7	RMS	28.5	-39.1	-15.6	11.8	.6	-89.5	-85.3	-4.2	216	165	V
5	1.57297	-75.26	RMS	28.5	-39.1	-15.6	11.8	.6	-89.06	-85.3	-3.76	72	165	V
6	1.6072	-75.8	RMS	28.5	-39.1	-15.6	11.8	.7	-89.5	-85.3	-4.2	108	165	V


RMS - RMS detection

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

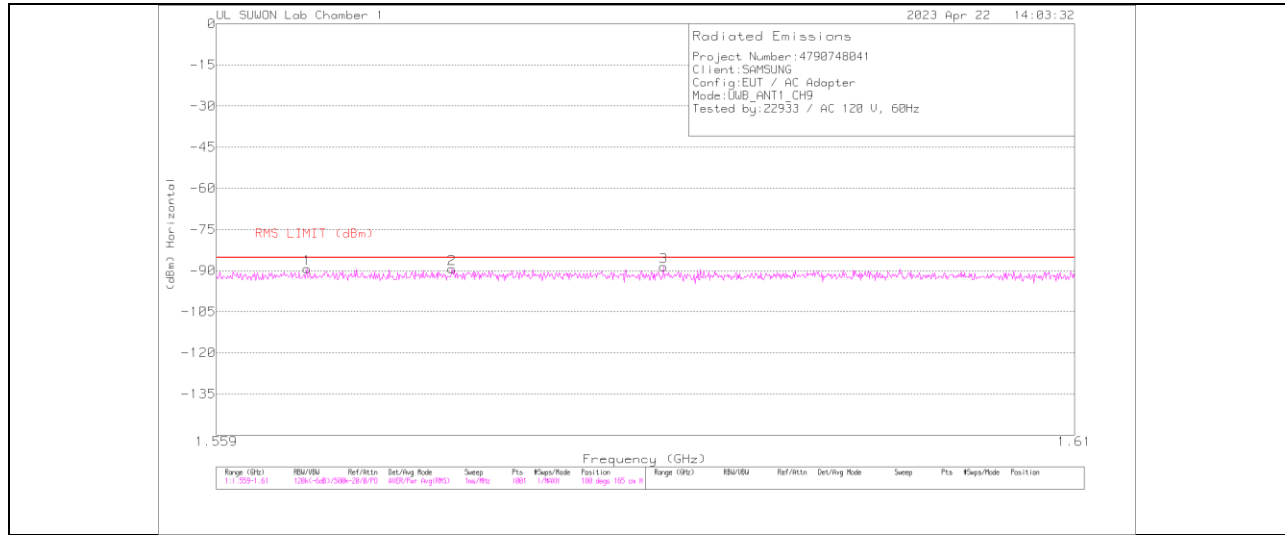

**VERTICAL RESULT**

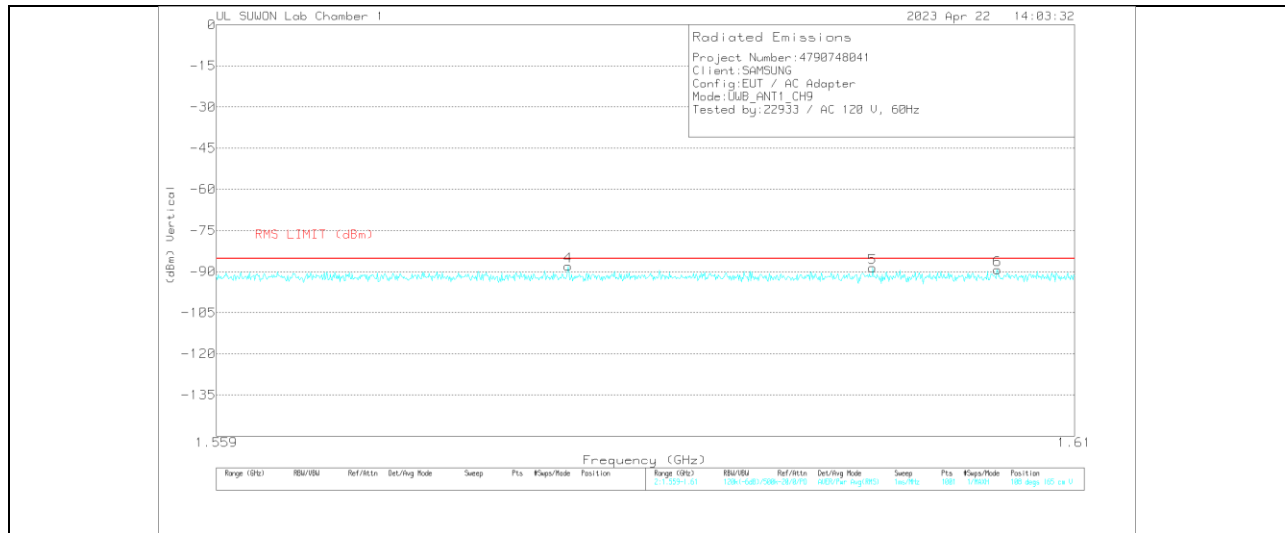

**Trace Markers**


Marker	Frequency (GHz)	Meas Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	LWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.5643	-75.48	RMS	28.5	-39.1	-15.6	11.8	.6	-89.28	-85.3	-3.98	252	165	H
2	1.57282	-75.56	RMS	28.5	-39.1	-15.6	11.8	.6	-89.36	-85.3	-4.06	72	165	H
3	1.58537	-74.98	RMS	28.5	-39	-15.6	11.8	.7	-88.58	-85.3	-3.28	72	165	H
4	1.57971	-74.3	RMS	28.5	-39.1	-15.6	11.8	.7	-88	-85.3	-2.7	252	165	V
5	1.59786	-74.94	RMS	28.5	-39.1	-15.6	11.8	.7	-88.64	-85.3	-3.34	36	165	V
6	1.60536	-75.71	RMS	28.5	-39.1	-15.6	11.8	.7	-89.41	-85.3	-4.11	216	165	V

RMS - RMS detection


**TX Antenna 2**

**CHANNEL, CH 9**

**HORIZONTAL RESULT**

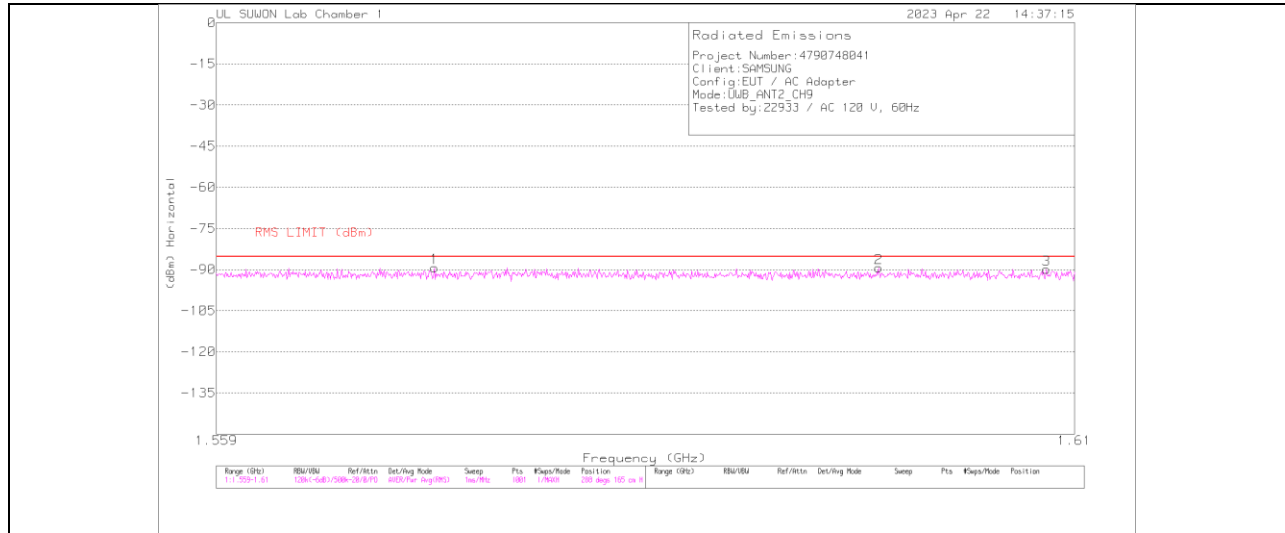

**VERTICAL RESULT**

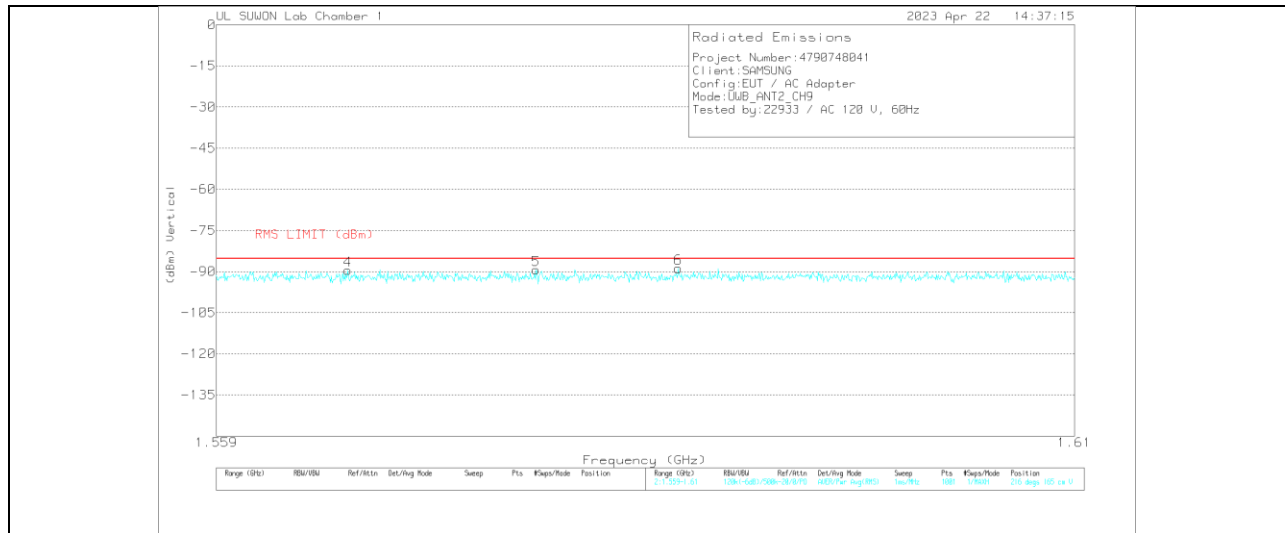



**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3117_00168717	0.96-18GHz[dB]	Dist. Corr. (dB)	Conv. Fact. (dB)	UWB_CH5_LPF	Corrected Reading (dBm)	RMS LIMIT (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.5718	-75.45	RMS	28.5	-39.1	-15.6	11.8	.6	-89.25	-85.3	-3.95	252	165	H
2	1.59822	-75.7	RMS	28.5	-39.1	-15.6	11.8	.7	-89.4	-85.3	-4.1	180	165	H
3	1.60832	-76.24	RMS	28.5	-39.1	-15.6	11.8	.7	-89.94	-85.3	-4.64	144	165	H
4	1.5667	-75.68	RMS	28.5	-39.1	-15.6	11.8	.6	-89.48	-85.3	-4.18	180	165	V
5	1.57782	-75.78	RMS	28.5	-39	-15.6	11.8	.7	-89.38	-85.3	-4.08	288	165	V
6	1.58623	-75.27	RMS	28.5	-39	-15.6	11.8	.7	-88.87	-85.3	-3.57	180	165	V

RMS - RMS detection

### 10.3. WORST CASE BELOW 1 GHZ

#### SPURIOUS EMISSIONS 30 TO 1000 MHz

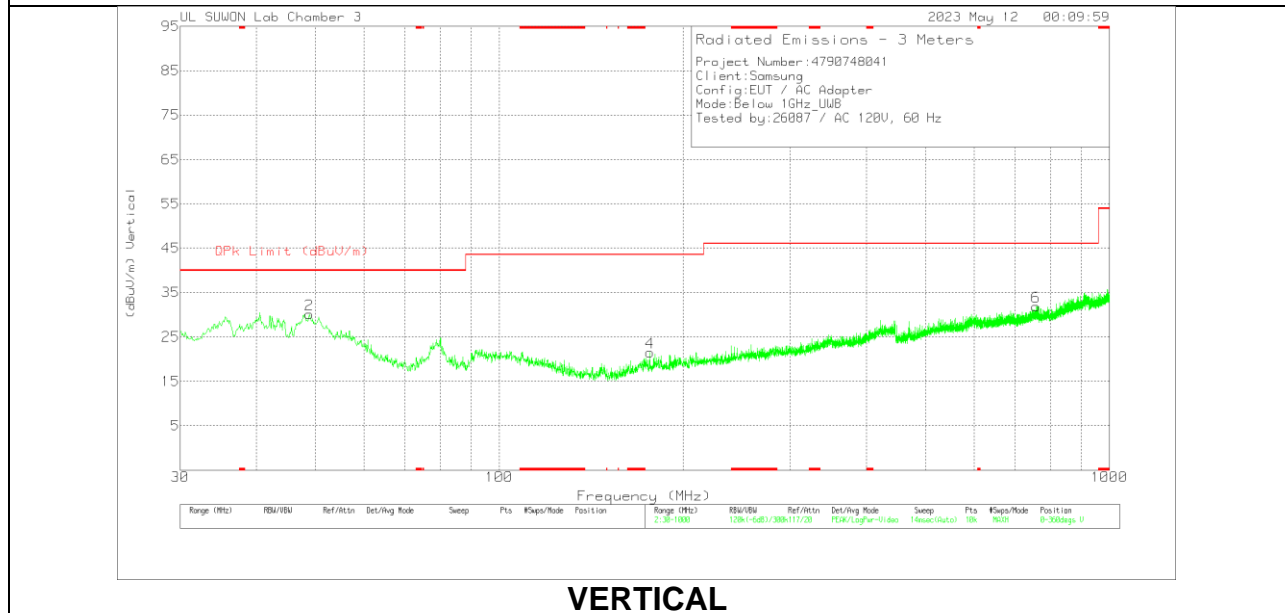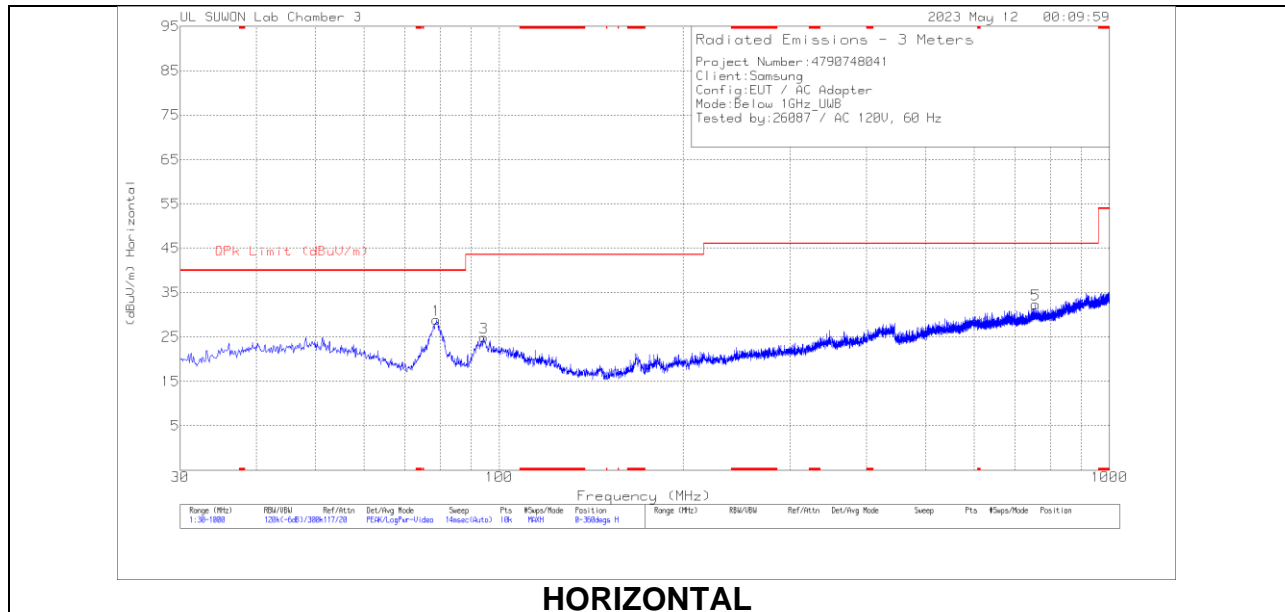

#### Below 1GHz Data

##### Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_845	Below_1G(dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	78.893	47.82	Pk	12.6	-31.6	28.82	40	-11.18	0-360	100	H
3	94.3176	39.49	Pk	16.8	-31.4	24.89	43.52	-18.63	0-360	200	H
5	757.09	35.44	Pk	26	-29.1	32.34	46.02	-13.68	0-360	200	H
2	48.8199	42.22	Pk	19.8	-31.9	30.12	40	-9.88	0-360	100	V
4	176.5821	37.69	Pk	14.8	-31	21.49	43.52	-22.03	0-360	100	V
6	757.478	34.94	Pk	26	-29.1	31.84	46.02	-14.18	0-360	100	V

Pk - Peak detector

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\*Decreases with the logarithm of the frequency.

### RESULTS

AC Line test was performed worst case. (Highest Power)  
ANT1 / CH9 / SP0 / BPRF9 / Packet Length 4

### 11.1.1. AC Power Line

### LINE 1 RESULTS

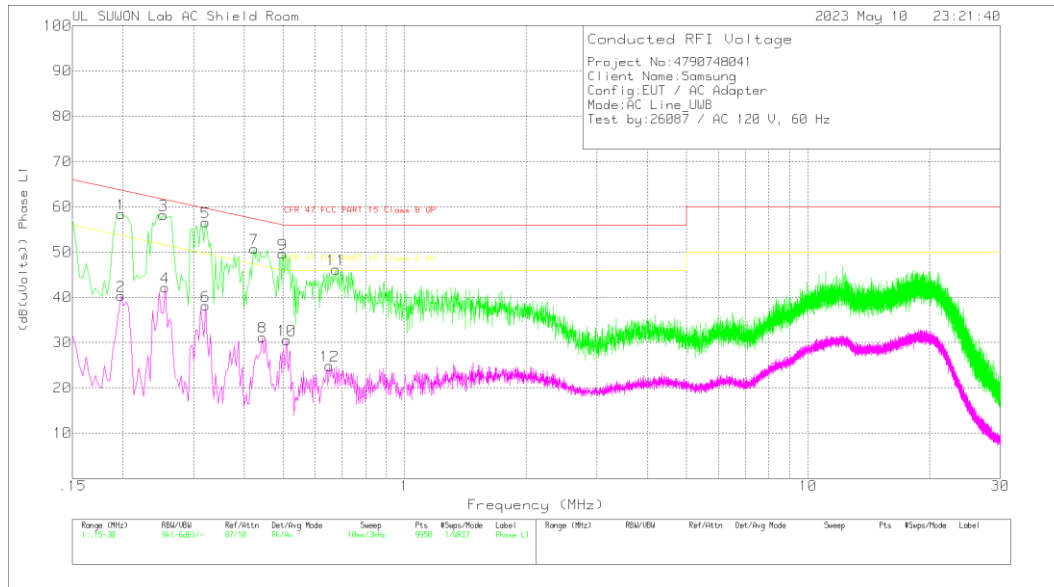

#### Trace Markers

Range 1: Phase L1 .15 - 30MHz


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.198	48.4	Pk	9.8	.2	58.4	63.69	-5.29	-	-
2	.198	30.32	Av	9.8	.2	40.32	-	-	53.69	-13.37
3	.252	48.4	Pk	9.6	.2	58.2	61.69	-3.49	-	-
4	.255	32.37	Av	9.6	.2	42.17	-	-	51.59	-9.42
5	.321	46.67	Pk	9.7	.2	56.57	59.68	-3.11	-	-
6	.321	28.21	Av	9.7	.2	38.11	-	-	49.68	-11.57
7	.423	40.7	Pk	9.8	.2	50.7	57.39	-6.69	-	-
8	.444	21.21	Av	9.8	.2	31.21	-	-	46.99	-15.78
9	.498	39.49	Pk	9.9	.2	49.59	56.03	-6.44	-	-
10	.51	20.49	Av	9.9	.2	30.59	-	-	46	-15.41
11	.675	36.15	Pk	9.8	.2	46.15	56	-9.85	-	-
12	.651	14.86	Av	9.8	.2	24.86	-	-	46	-21.14

#### Quasi-Peak Emissions

Range 1: Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.19725	33.6	Qp	9.8	.2	43.6	63.73	-20.13	-	-
.25275	40.2	Qp	9.6	.2	50	61.67	-11.67	-	-
.25515	37.1	Qp	9.6	.2	46.9	61.59	-14.69	-	-
.32175	40.54	Qp	9.7	.2	50.44	59.66	-9.22	-	-
.42225	35.36	Qp	9.8	.2	45.36	57.4	-12.04	-	-
.49815	28	Qp	9.9	.2	38.1	56.03	-17.93	-	-
.67575	22.34	Qp	9.8	.2	32.34	56	-23.66	-	-

### LINE 2 RESULTS

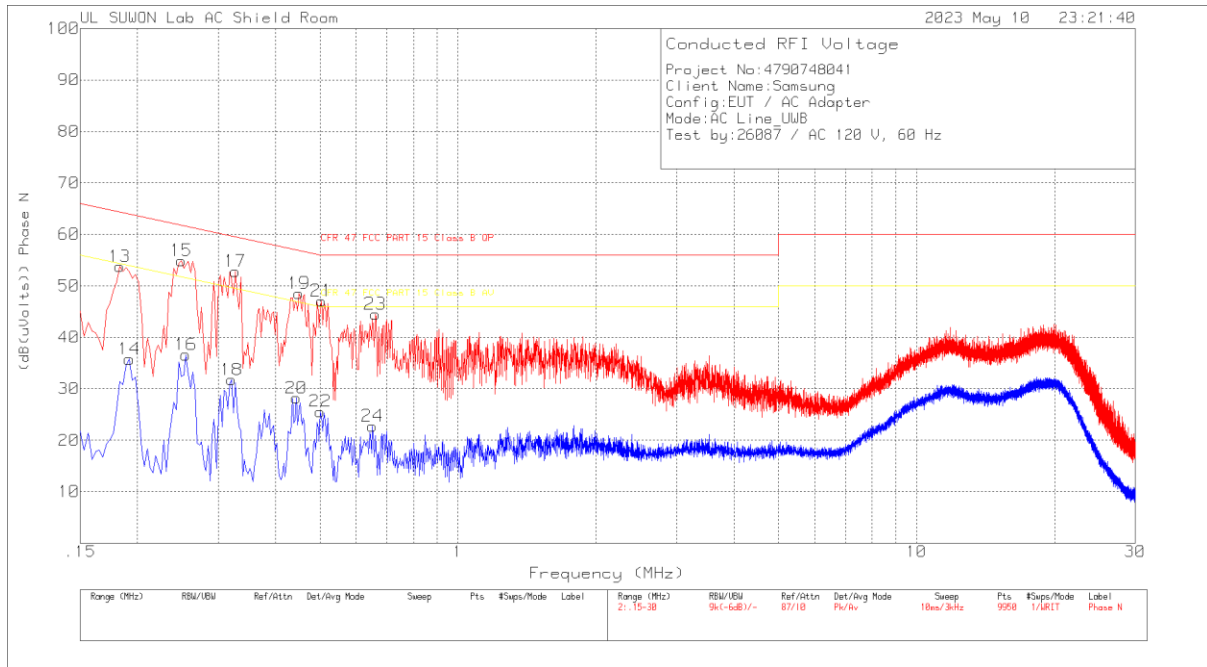

#### Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.183	43.64	Pk	9.9	.2	53.74	64.35	-10.61	-	-
14	.192	25.66	Av	9.9	.2	35.76	-	-	53.95	-18.19
15	.249	45.09	Pk	9.6	.2	54.89	61.79	-6.9	-	-
16	.255	26.8	Av	9.6	.2	36.6	-	-	51.59	-14.99
17	.327	42.92	Pk	9.7	.2	52.82	59.53	-6.71	-	-
18	.321	21.85	Av	9.7	.2	31.75	-	-	49.68	-17.93
19	.45	38.42	Pk	9.9	.2	48.52	56.88	-8.36	-	-
20	.444	18.09	Av	9.9	.2	28.19	-	-	46.99	-18.8
21	.504	36.98	Pk	9.9	.2	47.08	56	-8.92	-	-
22	.501	15.48	Av	9.9	.2	25.58	-	-	46	-20.42
23	.66	34.49	Pk	9.8	.2	44.49	56	-11.51	-	-
24	.651	12.75	Av	9.8	.2	22.75	-	-	46	-23.25


#### Quasi-Peak Emissions

Range 2: Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101836_With EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
.24975	34.43	Qp	9.6	.2	44.23	61.77	-17.54	-	-
.32625	38.99	Qp	9.7	.2	48.89	59.55	-10.66	-	-
.45075	25.32	Qp	9.9	.2	35.42	56.86	-21.44	-	-
.50415	27.13	Qp	9.9	.2	37.23	56	-18.77	-	-

## 12. SPOT-CHECK THEST RESULT (WORST CASE)



EIRP (ANT2\_CH9\_SP1\_BPRF4\_AV)

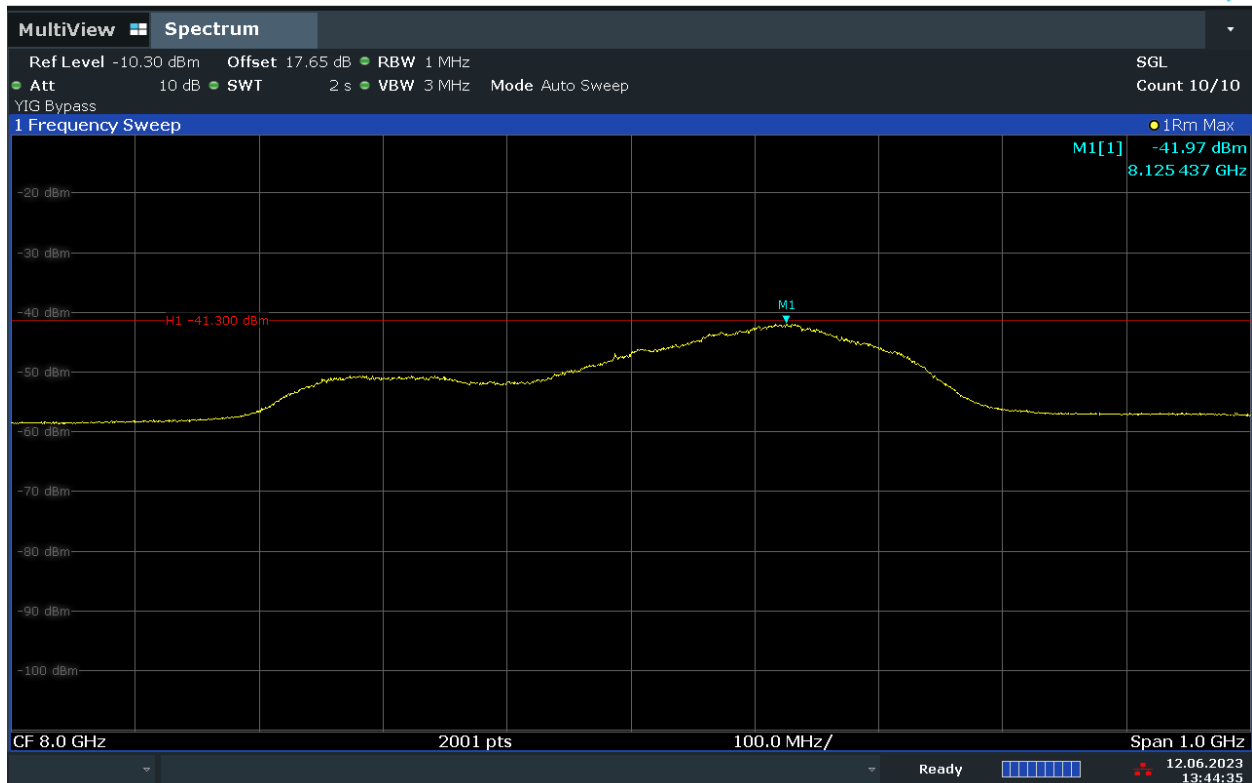

13:44:36 12.06.2023



**RSE (ANT1\_CH5\_SP0\_BPRF4)**

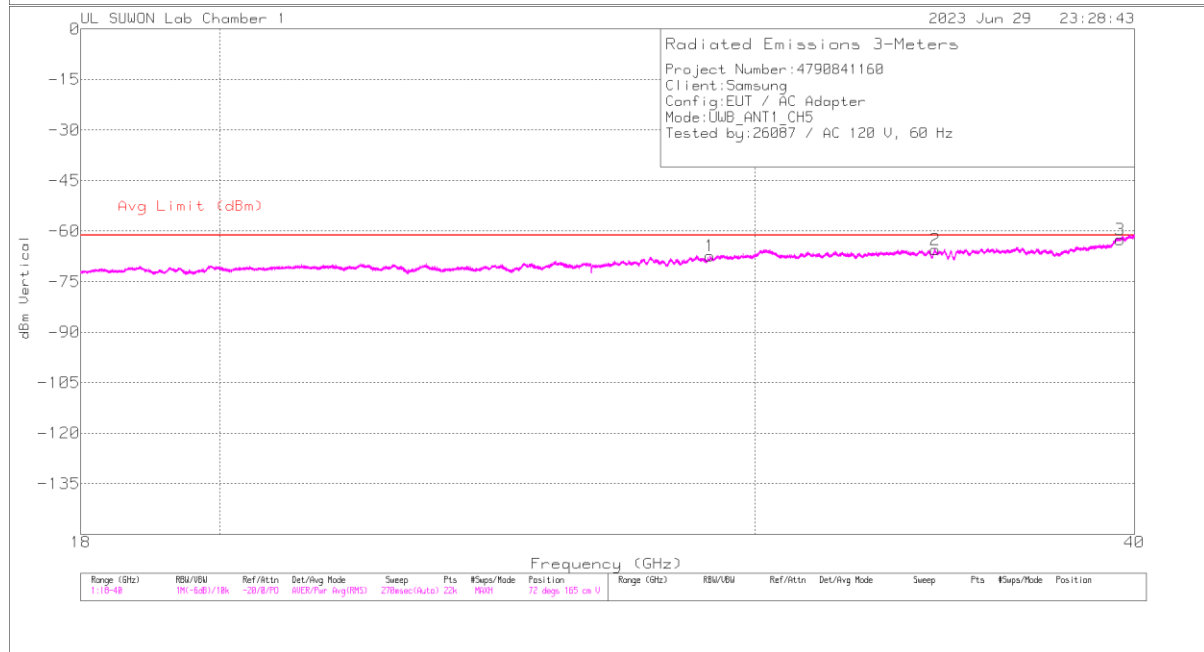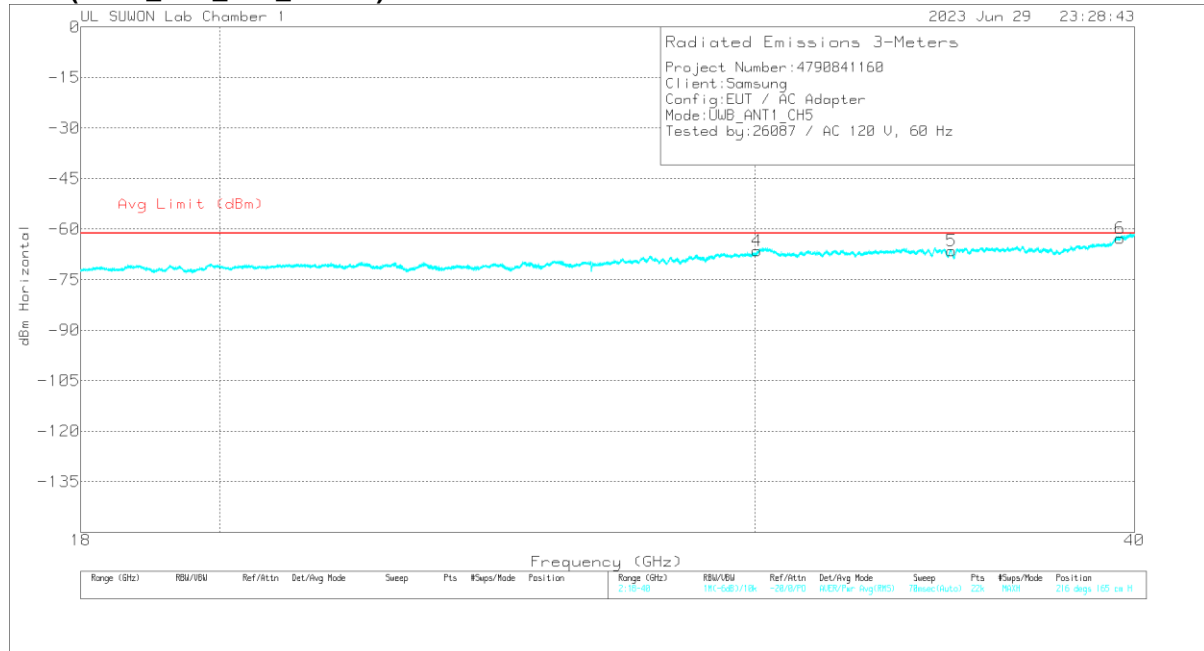

**Trace Markers**

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	3116C-PA(Combine)	18-40GHz(dB)	Conv. Fact. (dB)	Dist. Corr. (dB)	Corrected Reading (dBm)	Avg Limit (dBm)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	29.0025	-95.53	RMS	12.7	19.3	11.8	-15.6	-67.33	-61.3	-6.03	252	165	V
2	34.39026	-94.98	RMS	12	21.3	11.8	-15.6	-65.48	-61.3	-4.18	0	165	V
3	39.57303	-93.94	RMS	12.2	23.1	11.8	-15.6	-62.44	-61.3	-1.14	288	165	V
4	30.05046	-96.08	RMS	13.7	19.7	11.8	-15.6	-66.48	-61.3	-5.18	252	165	H
5	34.81824	-95.7	RMS	11.6	21.4	11.8	-15.6	-66.5	-61.3	-5.2	72	165	H
6	39.57203	-94.19	RMS	12.2	23.1	11.8	-15.6	-62.69	-61.3	-1.39	108	165	H

RMS - RMS detection

**END OF TEST REPORT**