




**LTE Band 26 (Straddle)**





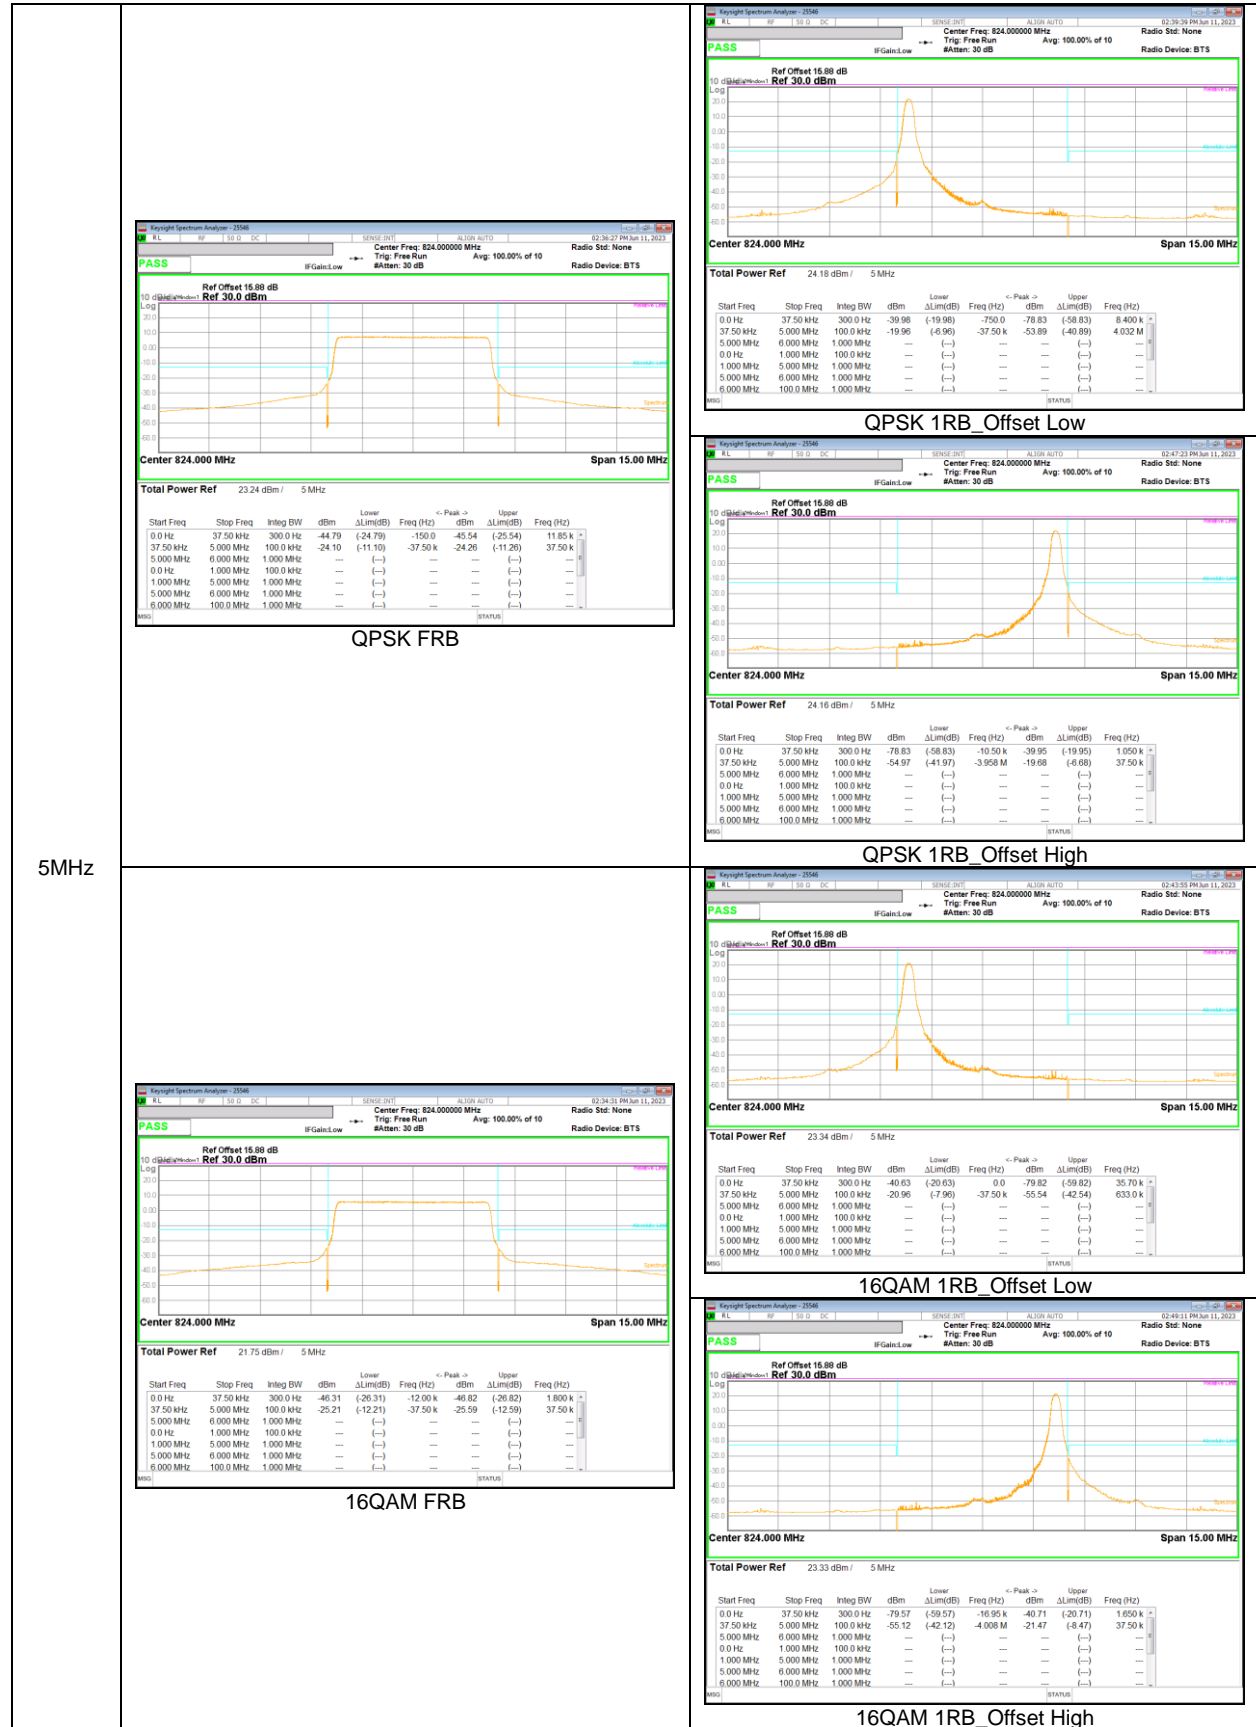

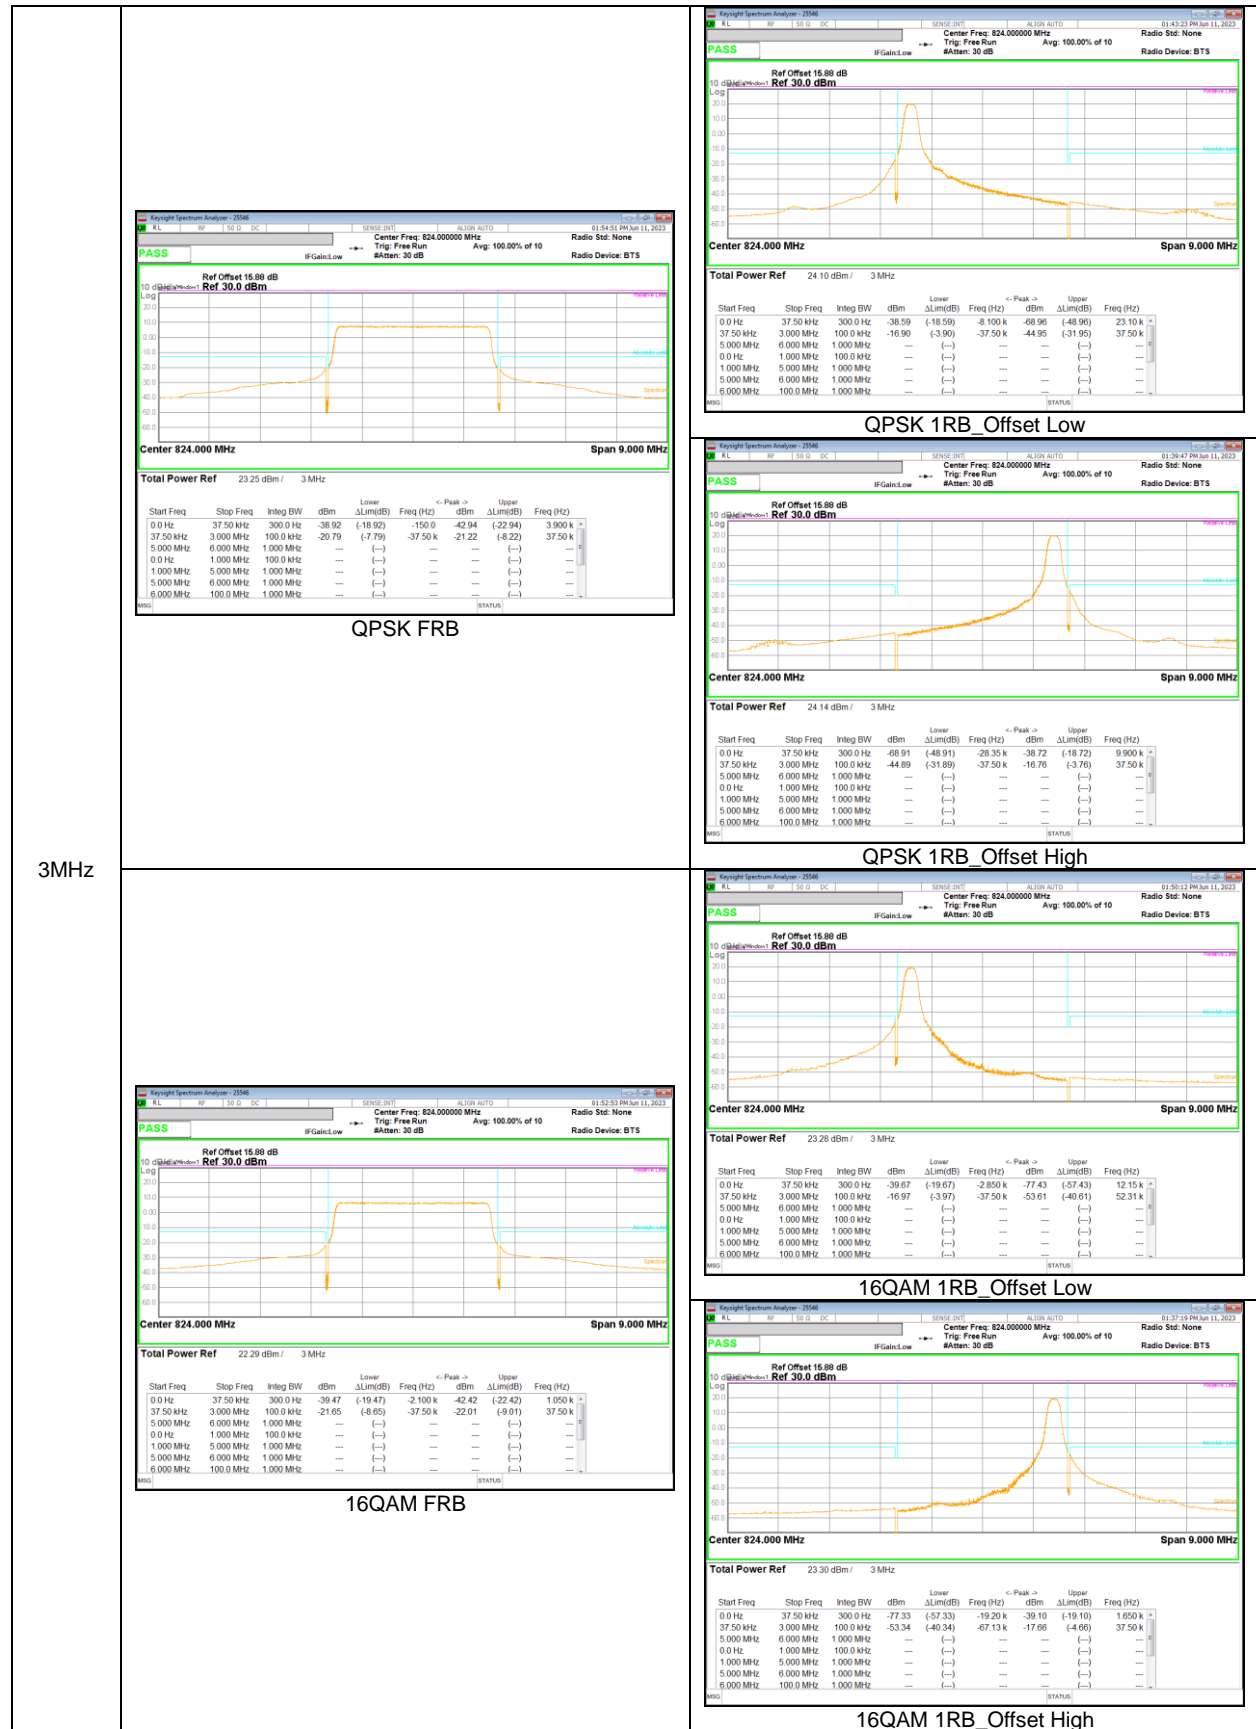

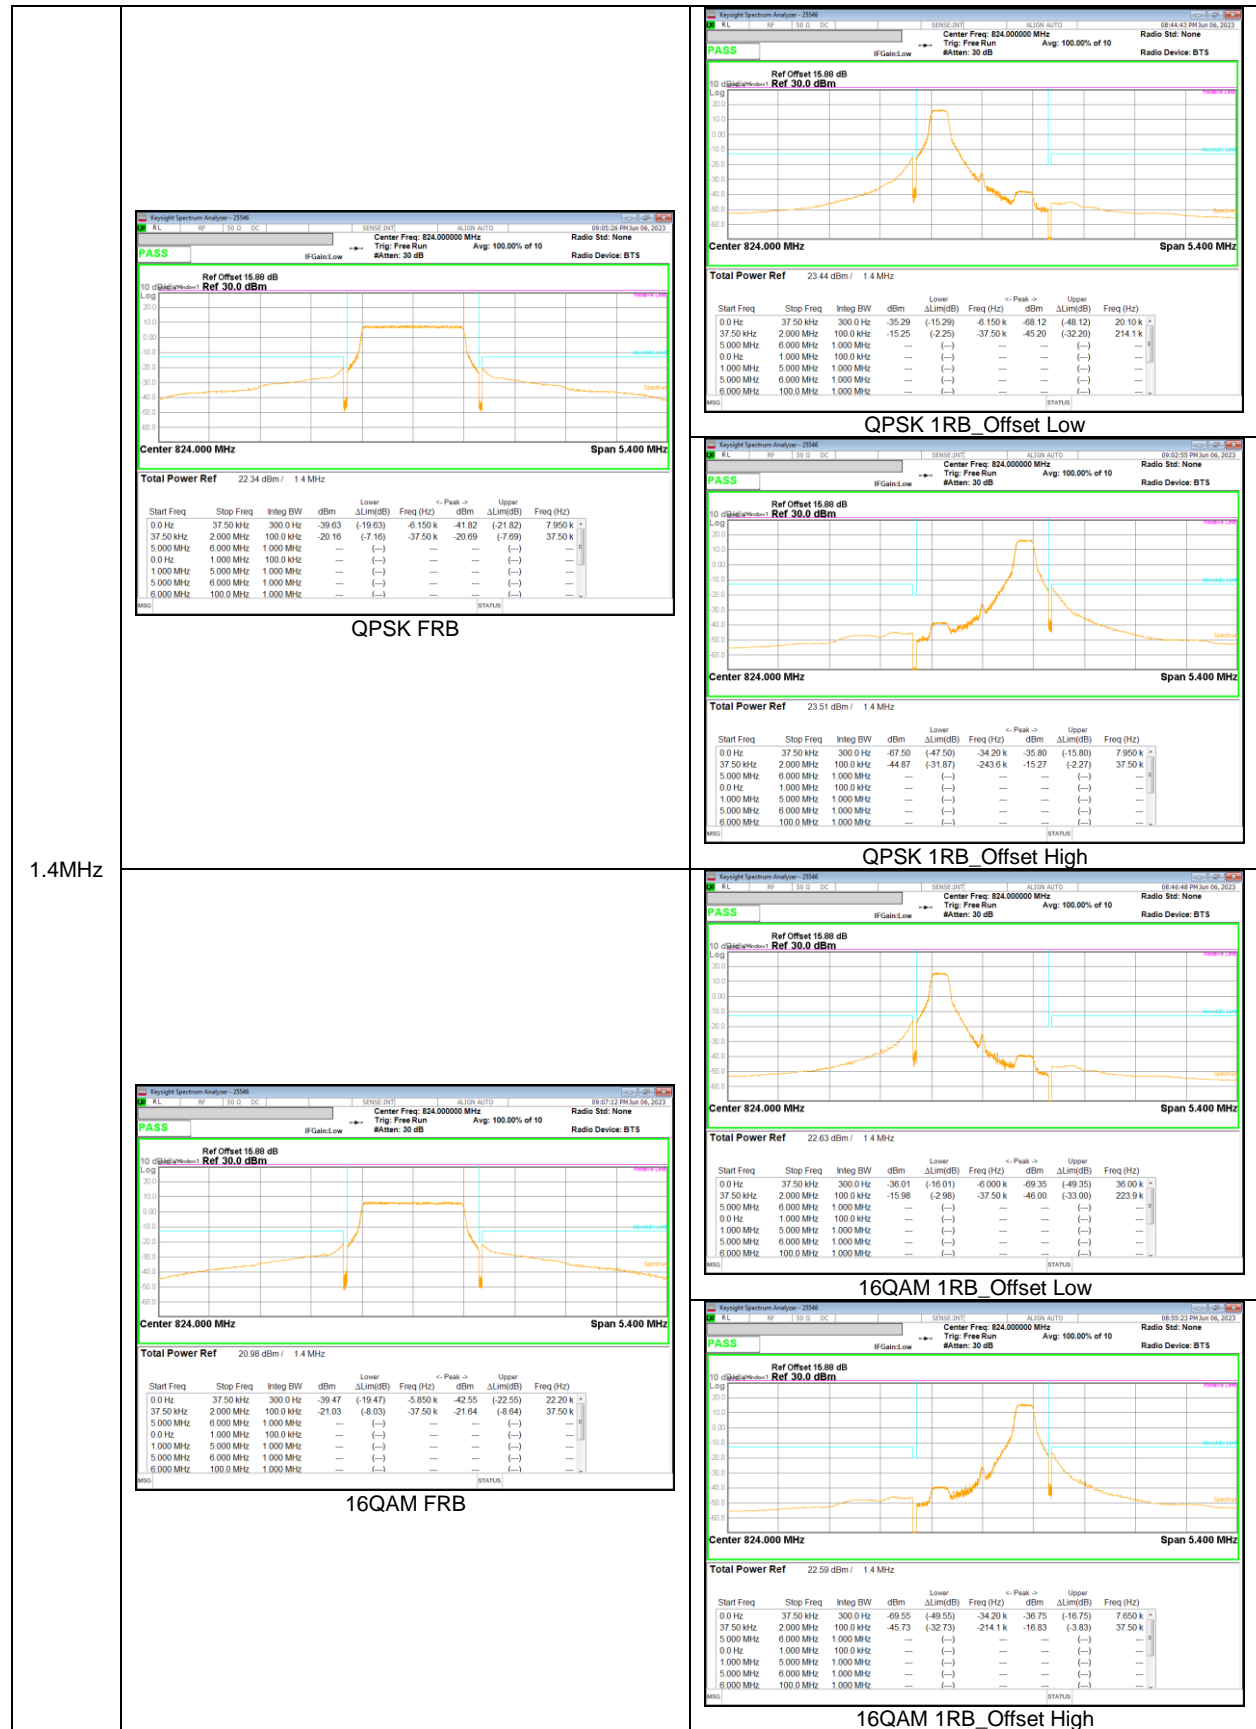

1.4MHz



## 8.5. CONDUCTED SPURIOUS EMISSIONS

### RULE PART(S)

FCC: §2.1051, §22.901, §22.917 and 90.691

### LIMITS

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 90.691(a):

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. (NOTE : Use 100kHz reference bandwidth)

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

### TEST PROCEDURE

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

- a) Set the RBW = 100 kHz for emission below 1 GHz and 1 MHz for emissions above 1 GHz  
(Tests were performed 1MHz [Worst case], to sweep 1 time for all frequency range)
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points = Max (40001);
- g) Trace mode = average(WCDMA, LTE, 5G NR), Max hold(GSM);

### NOTE1


Please refer to section 5.4 for bandwidth and RB setting about LTE, 5G NR bands.

### RESULTS

See the following pages.

### 8.5.1. OUT OF BAND EMISSIONS RESULT

#### GSM 850

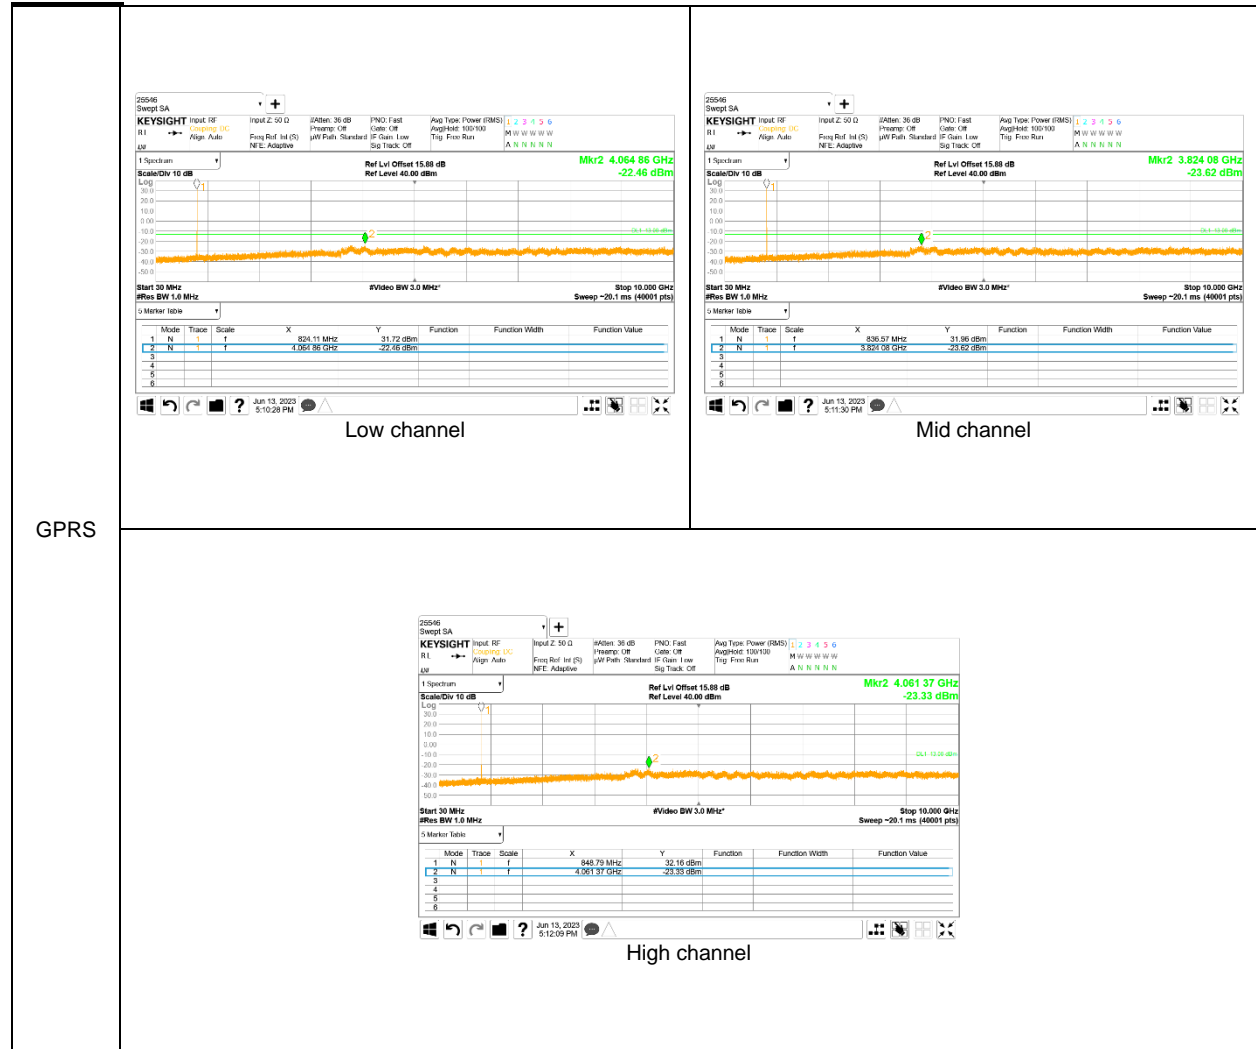


WCDMA Band 5




**LTE Band 5**



**LTE Band 26(Part 90)**

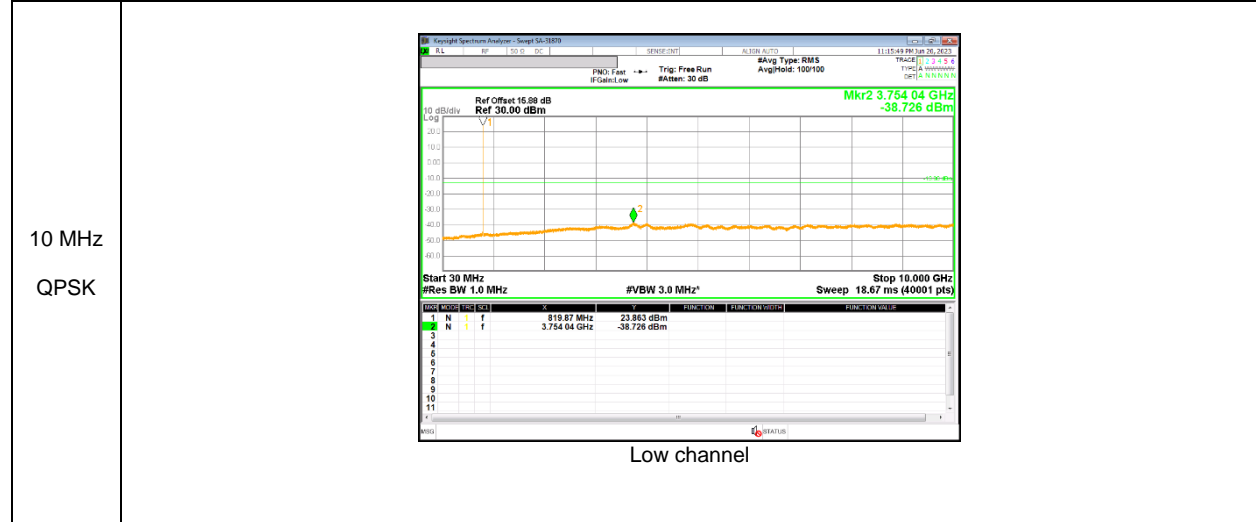


**LTE Band 26 (Straddle)**

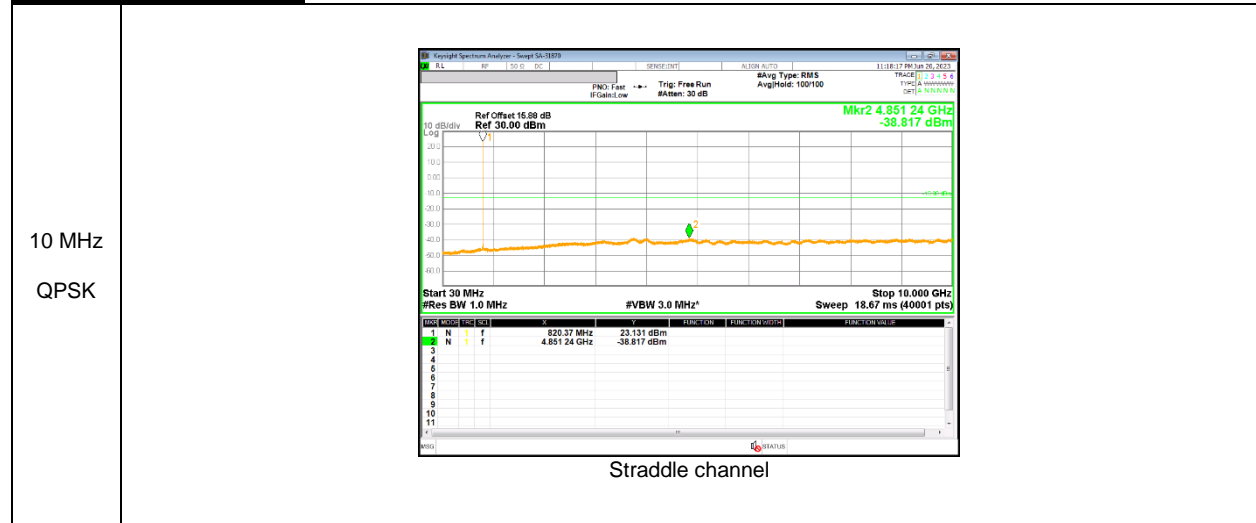

**LTE Band 26 (Part 22)**



NR Band n5

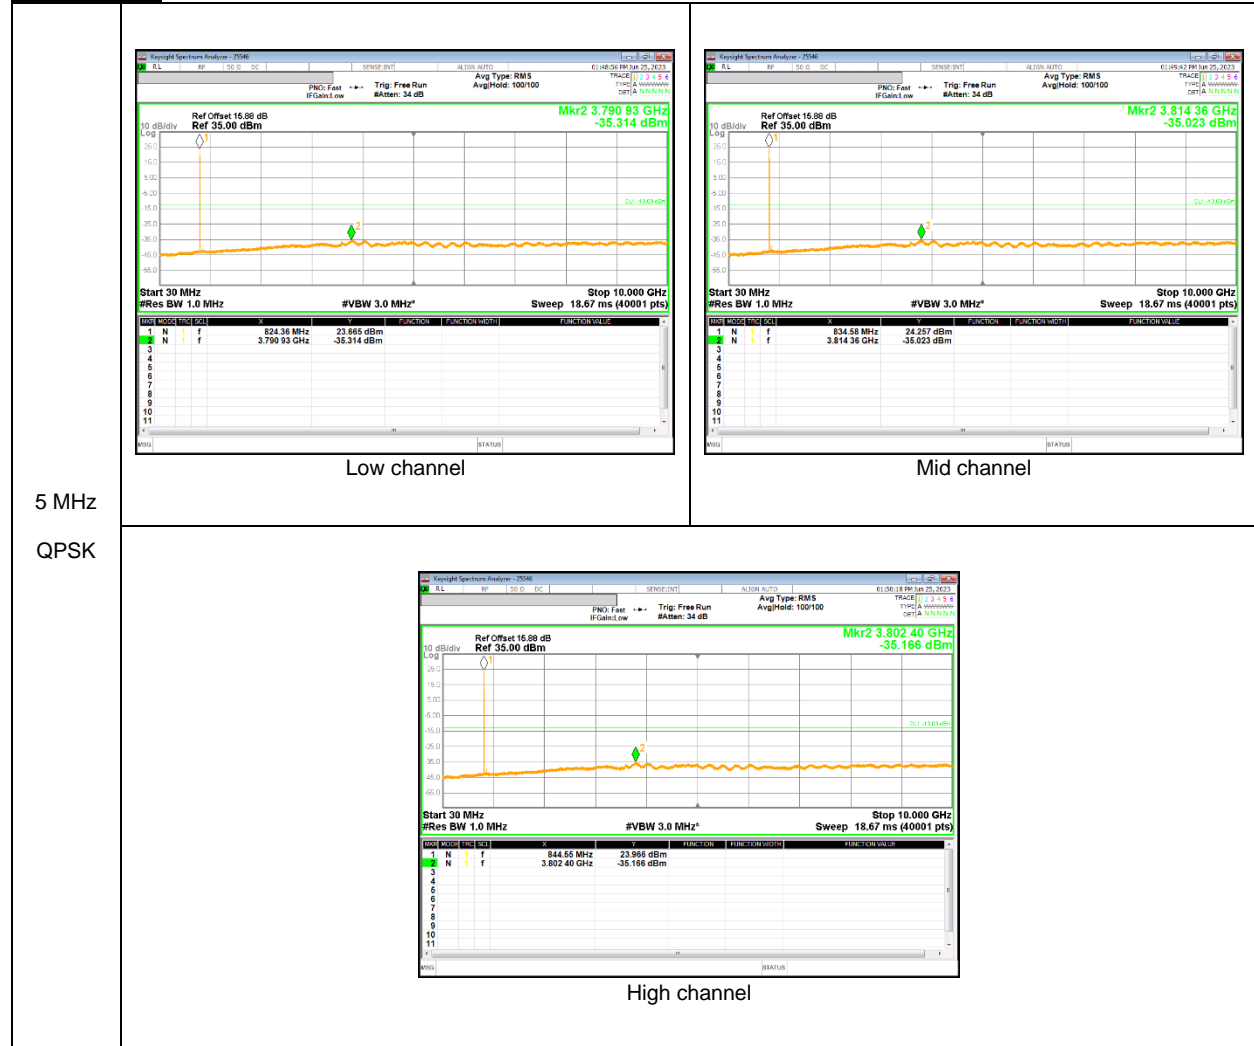

## **8.6. FREQUENCY STABILITY**

### **RULE PART(S)**

FCC: §2.1055, §22.355 and §90.213

### **LIMITS**

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

§90.213 - The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

### **TEST PROCEDURE**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01

### **NOTE**

Test were performed each lowest or highest frequency on the modulation condition of more wide bandwidth.(Please refer to section 9.1.1 OBW results)

### **RESULTS**

See the following pages.



### 8.6.1. FREQUENCY STABILITY RESULTS

#### GSM 850, Channel 128/251, Frequency 824.2/848.8 MHz

Test Date	2023-06-07
Test Engineer	47989

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C						
Limit: +/- 2.5 ppm =	Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	50	824.20003265	0.005	848.80003060	0.007	2.5
3.88	40	824.20003547	0.002	848.80003470	0.003	2.5
3.88	30	824.20003748	-0.001	848.80003394	0.003	2.5
<b>3.88</b>	<b>20</b>	<b>824.20003704</b>	<b>0.000</b>	<b>848.80003691</b>	<b>0.000</b>	<b>2.5</b>
3.88	10	824.20003764	-0.001	848.80003635	0.001	2.5
3.88	0	824.20003676	0.000	848.80003629	0.001	2.5
3.88	-10	824.20003642	0.001	848.80003680	0.000	2.5
3.88	-20	824.20003795	-0.001	848.80003728	0.000	2.5
3.88	-30	824.20003801	-0.001	848.80003833	-0.002	2.5

Reference Frequency : GSM850 Low Channel 824.2 MHz / High Channel 848.8 MHz @ 20°C						
Limit: +/- 2.5 ppm =	Low Channel	2060.500	Hz	High Channel	2122.000	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
<b>3.88</b>	<b>20</b>	<b>824.20003704</b>	<b>0</b>	<b>848.80003691</b>	<b>0</b>	<b>2.5</b>
4.45	20	824.20003065	0.008	848.80003241	0.005	2.5
3.70	20	824.20003348	0.004	848.80003578	0.001	2.5

#### WCDMA Band 5

Test Date	2023-06-09
Test Engineer	47989

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C						
Limit: +/- 2.5 ppm =	Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
3.88	50	826.40000266	0.000	846.60000336	-0.001	2.5
3.88	40	826.40000237	0.000	846.60000296	-0.001	2.5
3.88	30	826.40000323	-0.001	846.60000279	0.000	2.5
<b>3.88</b>	<b>20</b>	<b>826.40000243</b>	<b>0.000</b>	<b>846.60000251</b>	<b>0.000</b>	<b>2.5</b>
3.88	10	826.40000284	0.000	846.60000277	0.000	2.5
3.88	0	826.40000308	-0.001	846.60000267	0.000	2.5
3.88	-10	826.40000398	-0.002	846.60000436	-0.002	2.5
3.88	-20	826.40000426	-0.002	846.60000545	-0.003	2.5
3.88	-30	826.40000467	-0.003	846.60000568	-0.004	2.5

Reference Frequency : WCDMA Band 5 Low Channel 826.4 MHz / High Channel 846.6 MHz @ 20°C						
Limit: +/- 2.5 ppm =	Low Channel	2066.000	Hz	High Channel	2116.500	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]
		Low Channel		High Channel		
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]	
<b>3.88</b>	<b>20</b>	<b>826.40000243</b>	<b>0</b>	<b>846.60000251</b>	<b>0</b>	<b>2.5</b>
4.45	20	826.40000211	0.000	846.60000232	0.000	2.5
3.70	20	826.40000341	-0.001	846.60000369	-0.001	2.5

**LTE Band 5**

Test Date	2023-06-12
Test Engineer	47989

Reference Frequency : Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	824.70002047	0.006	848.30001389	0.005	2.5	
3.88	40	824.70001957	0.007	848.30002027	-0.002	2.5	
3.88	30	824.70001883	0.008	848.30002011	-0.002	2.5	
<b>3.88</b>	<b>20</b>	<b>824.70002556</b>	<b>0.000</b>	<b>848.30001825</b>	<b>0.000</b>	<b>2.5</b>	
3.88	10	824.70000624	0.023	848.30004795	-0.035	2.5	
3.88	0	824.70002588	0.000	848.30003067	-0.015	2.5	
3.88	-10	824.70001712	0.010	848.30002105	-0.003	2.5	
3.88	-20	824.70002087	0.006	848.30002781	-0.011	2.5	
3.88	-30	824.70000917	0.020	848.30003131	-0.015	2.5	

Reference Frequency : Low Channel 824.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2061.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
<b>3.88</b>	<b>20</b>	<b>824.70002556</b>	<b>0</b>	<b>848.30001825</b>	<b>0</b>	<b>2.5</b>	
4.45	20	824.70002033	0.006	848.30002340	-0.006	2.5	
3.70	20	824.70001534	0.012	848.30001847	0.000	2.5	

**LTE Band 26**

Test Date	2023-06-12
Test Engineer	47989

Reference Frequency : Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	814.70000532	0.006	848.30002061	0.012	2.5	
3.88	40	814.70001604	-0.007	848.30001137	0.023	2.5	
3.88	30	814.70001936	-0.011	848.30001676	0.016	2.5	
<b>3.88</b>	<b>20</b>	<b>814.70001000</b>	<b>0.000</b>	<b>848.30003052</b>	<b>0.000</b>	<b>2.5</b>	
3.88	10	814.70002629	-0.020	848.30003470	-0.005	2.5	
3.88	0	814.70001581	-0.007	848.30003605	-0.007	2.5	
3.88	-10	814.70002005	-0.012	848.30003250	-0.002	2.5	
3.88	-20	814.70002034	-0.013	848.30003400	-0.004	2.5	
3.88	-30	814.70000986	0.000	848.30002802	0.003	2.5	

Reference Frequency : Low Channel 814.7 MHz / High Channel 848.3 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2036.750	Hz	High Channel	2120.750	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
<b>3.88</b>	<b>20</b>	<b>814.70001000</b>	<b>0</b>	<b>848.30003052</b>	<b>0</b>	<b>2.5</b>	
4.45	20	814.70001136	-0.002	848.30001623	0.017	2.5	
3.70	20	814.70001548	-0.007	848.30001348	0.020	2.5	

**NR Band n5**

Test Date	2023-06-19
Test Engineer	47989

Reference Frequency : Low Channel 826.5 MHz / High Channel 846.5 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.250	Hz	High Channel	2116.250	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	50	826.50002155	0.002	846.50001254	0.007	2.5	
3.88	40	826.50001584	0.009	846.50002189	-0.004	2.5	
3.88	30	826.50002822	-0.006	846.50001999	-0.002	2.5	
<b>3.88</b>	<b>20</b>	<b>826.50002356</b>	<b>0.000</b>	<b>846.50001814</b>	<b>0.000</b>	<b>2.5</b>	
3.88	10	826.50000888	0.018	846.50005021	-0.038	2.5	
3.88	0	826.50002156	0.002	846.50004123	-0.027	2.5	
3.88	-10	826.50001356	0.012	846.50003105	-0.015	2.5	
3.88	-20	826.50002155	0.002	846.50002547	-0.009	2.5	
3.88	-30	826.50001023	0.016	846.50004023	-0.026	2.5	

Reference Frequency : Low Channel 826.5 MHz / High Channel 846.5 MHz @ 20°C							
Limit: +- 2.5 ppm =		Low Channel	2066.250	Hz	High Channel	2116.250	Hz
Power Supply [Vdc]	Environment Temperature [°C]	Frequency Deviation Measured with Time Elapse				Limit [ppm]	
		Low Channel		High Channel			
		[MHz]	Delta [ppm]	[MHz]	Delta [ppm]		
3.88	20	826.50002356	0	846.50001814	0	2.5	
4.45	20	826.50002155	0.002	846.50003123	-0.015	2.5	
3.70	20	826.50001684	0.008	846.50002122	-0.004	2.5	

## 9. RADIATED RESULTS

### 9.1. RADIATED POWER (ERP)

#### RULE PART(S)

FCC: §2.1046, §22.913 and §90.635

#### LIMITS

22.913(a) - The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

90.635(b) The maximum output power of the transmitter for mobile stations is 100 watts (20dBw).

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13dB.

#### TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.17; ESU40 setting reference to 971168 D01 v03r01

For radiated output power measurement with a ESU40:

- a) Set the RBW  $\geq$  OBW;
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 2 \times$  RBW;
- d) Sweep time = auto couple or 1 second;
- e) Detector = rms;
- f) Ensure that the number of measurement points  $\geq$  span/RBW;
- g) Trace mode = max hold(GSM, WCDMA), average(LTE, 5G NR);

#### TEST RESULTS

See the following pages.

### 9.1.1. ERP Results

#### GSM (ANT A+B)

Band	Mode	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)
GSM 850	GPRS	824.20	31.71	V	3.01	-1.03	27.68	586.14	38.50	-10.82
		836.60	32.91	V	3.03	-0.97	28.91	778.04	38.50	-9.59
		848.80	32.76	V	3.05	-0.91	28.80	758.58	38.50	-9.70
	EGPRS	824.20	27.14	V	3.01	-1.03	23.11	204.64	38.50	-15.39
		836.60	27.96	V	3.03	-0.97	23.96	248.89	38.50	-14.54
		848.80	27.55	V	3.05	-0.91	23.59	228.56	38.50	-14.91

#### GSM (ANT A)

Band	Mode	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)
GSM 850	GPRS	824.20	25.27	V	3.01	-1.03	21.24	133.05	38.50	-17.26
		836.60	25.37	V	3.03	-0.97	21.37	137.09	38.50	-17.13
		848.80	25.45	V	3.05	-0.91	21.49	140.93	38.50	-17.01
	EGPRS	824.20	20.80	V	3.01	-1.03	16.77	47.53	38.50	-21.73
		836.60	21.26	V	3.03	-0.97	17.26	53.21	38.50	-21.24
		848.80	21.52	V	3.05	-0.91	17.56	57.02	38.50	-20.94

#### WCDMA (ANT A+B)

Band	Mode	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)
Band 5	REL99	826.40	24.85	V	3.01	-1.02	20.82	120.78	38.50	-17.68
		836.60	25.69	V	3.03	-0.97	21.69	147.57	38.50	-16.81
		846.60	25.75	V	3.05	-0.92	21.78	150.66	38.50	-16.72
	HSDPA	826.40	23.88	V	3.01	-1.02	19.85	96.61	38.50	-18.65
		836.60	24.72	V	3.03	-0.97	20.72	118.03	38.50	-17.78
		846.60	24.77	V	3.05	-0.92	20.80	120.23	38.50	-17.70

#### WCDMA (ANT A)

Band	Mode	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBi)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)
Band 5	REL99	826.40	23.52	V	3.01	-1.02	19.49	88.92	38.50	-19.01
		836.60	23.38	V	3.03	-0.97	19.38	86.70	38.50	-19.12
		846.60	23.55	V	3.05	-0.92	19.58	90.78	38.50	-18.92
	HSDPA	826.40	22.28	V	3.01	-1.02	18.25	66.83	38.50	-20.25
		836.60	22.40	V	3.03	-0.97	18.40	69.18	38.50	-20.10
		846.60	22.43	V	3.05	-0.92	18.46	70.15	38.50	-20.04

**LTE Band 5 (ANT A+B)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
10	QPSK	829.00	24.95	V	3.02	-1.01	20.92	123.59	38.50	-18.58	1/0
		836.50	25.03	V	3.03	-0.97	21.04	127.06	38.50	-17.46	1/0
		844.00	24.68	V	3.04	-0.93	20.70	117.49	38.50	-17.80	1/49
	16-QAM	829.00	23.69	V	3.02	-1.01	19.66	92.47	38.50	-18.84	1/0
		836.50	24.04	V	3.03	-0.97	20.05	101.16	38.50	-18.45	1/0
		844.00	23.60	V	3.04	-0.93	19.62	91.62	38.50	-18.88	1/49
5	QPSK	826.50	24.30	V	3.01	-1.02	20.27	106.41	38.50	-18.23	1/12
		836.50	24.90	V	3.03	-0.97	20.91	123.31	38.50	-17.59	1/12
		846.50	24.81	V	3.05	-0.92	20.84	121.34	38.50	-17.66	1/12
	16-QAM	826.50	23.21	V	3.01	-1.02	19.18	82.79	38.50	-19.32	1/0
		836.50	23.88	V	3.03	-0.97	19.89	97.50	38.50	-18.61	1/12
		846.50	23.68	V	3.05	-0.92	19.71	93.54	38.50	-18.79	1/12
3	QPSK	825.50	24.65	V	3.01	-1.02	20.62	115.35	38.50	-17.88	1/8
		836.50	24.24	V	3.03	-0.97	20.25	105.93	38.50	-18.25	1/8
		847.50	24.85	V	3.05	-0.91	20.89	122.74	38.50	-17.61	1/8
	16-QAM	825.50	22.92	V	3.01	-1.02	18.89	77.45	38.50	-19.61	1/8
		836.50	23.19	V	3.03	-0.97	19.20	83.18	38.50	-19.30	1/8
		847.50	23.78	V	3.05	-0.91	19.82	95.94	38.50	-18.68	1/8
1.4	QPSK	824.70	23.82	V	3.01	-1.03	19.78	96.06	38.50	-18.72	1/3
		836.50	24.71	V	3.03	-0.97	20.72	118.03	38.50	-17.78	1/3
		848.30	24.84	V	3.05	-0.91	20.88	122.46	38.50	-17.62	1/3
	16-QAM	824.70	22.75	V	3.01	-1.03	18.71	74.30	38.50	-19.79	1/5
		836.50	23.57	V	3.03	-0.97	19.58	90.78	38.50	-18.92	1/3
		848.30	23.82	V	3.05	-0.91	19.86	96.83	38.50	-18.64	1/3

**LTE Band 5 (ANT A)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
10	QPSK	829.00	22.09	V	3.02	-1.01	18.06	63.97	38.50	-20.44	1/0
		836.50	22.62	V	3.03	-0.97	18.63	72.95	38.50	-19.87	1/0
		844.00	22.66	V	3.04	-0.93	18.68	73.79	38.50	-19.82	1/49
	16-QAM	829.00	21.24	V	3.02	-1.01	17.21	52.60	38.50	-21.29	1/0
		836.50	21.58	V	3.03	-0.97	17.59	57.41	38.50	-20.91	1/0
		844.00	21.71	V	3.04	-0.93	17.73	59.29	38.50	-20.77	1/49
5	QPSK	826.50	21.98	V	3.01	-1.02	17.95	62.37	38.50	-20.55	1/12
		836.50	23.08	V	3.03	-0.97	19.09	81.10	38.50	-19.41	1/12
		846.50	22.87	V	3.05	-0.92	18.90	77.62	38.50	-19.60	1/12
	16-QAM	826.50	20.96	V	3.01	-1.02	16.93	49.32	38.50	-21.57	1/0
		836.50	22.22	V	3.03	-0.97	18.23	66.53	38.50	-20.27	1/12
		846.50	21.99	V	3.05	-0.92	18.02	63.39	38.50	-20.48	1/12
3	QPSK	825.50	21.91	V	3.01	-1.02	17.88	61.38	38.50	-20.62	1/8
		836.50	23.00	V	3.03	-0.97	19.01	79.62	38.50	-19.49	1/8
		847.50	22.66	V	3.05	-0.91	18.70	74.13	38.50	-19.80	1/8
	16-QAM	825.50	20.93	V	3.01	-1.02	16.90	48.98	38.50	-21.60	1/8
		836.50	22.13	V	3.03	-0.97	18.14	65.16	38.50	-20.36	1/8
		847.50	21.68	V	3.05	-0.91	17.72	59.16	38.50	-20.78	1/8
1.4	QPSK	824.70	22.43	V	3.01	-1.03	18.39	69.02	38.50	-20.11	1/3
		836.50	22.73	V	3.03	-0.97	18.74	74.82	38.50	-19.76	1/3
		848.30	22.82	V	3.05	-0.91	18.86	76.91	38.50	-19.64	1/3
	16-QAM	824.70	21.37	V	3.01	-1.03	17.33	54.08	38.50	-21.17	1/5
		836.50	21.77	V	3.03	-0.97	17.78	59.98	38.50	-20.72	1/3
		848.30	21.78	V	3.05	-0.91	17.82	60.53	38.50	-20.68	1/3

**LTE Band 26 (ANT A+B)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB		
15	QPSK	821.50	22.87	V	3.01	-1.04	18.82	76.21	50.00	-31.18	1/38		
		831.50	24.20	V	3.02	-0.99	20.18	104.23	38.50	-18.32	1/37		
		841.50	24.20	V	3.04	-0.94	20.22	105.20	38.50	-18.28	1/0		
	16-QAM	821.50	21.77	V	3.01	-1.04	17.72	59.16	50.00	-32.28	1/38		
		831.50	23.23	V	3.02	-0.99	19.21	83.37	38.50	-19.29	1/37		
		841.50	23.63	V	3.04	-0.94	19.65	92.26	38.50	-18.85	1/37		
10	QPSK	819.00	22.74	V	3.00	-1.06	18.69	73.96	50.00	-31.31	1/25		
		829.00	24.41	V	3.02	-1.01	20.38	109.14	38.50	-18.12	1/25		
		831.50	24.56	V	3.02	-0.99	20.54	113.24	38.50	-17.96	1/25		
		844.00	25.18	V	3.04	-0.93	21.20	131.83	38.50	-17.30	1/25		
	16-QAM	819.00	21.68	V	3.00	-1.06	17.63	57.94	50.00	-32.37	1/25		
		829.00	23.41	V	3.02	-1.01	19.38	86.70	38.50	-19.12	1/25		
		831.50	23.23	V	3.02	-0.99	19.21	83.37	38.50	-19.29	1/0		
		844.00	23.93	V	3.04	-0.93	19.95	98.86	38.50	-18.55	1/0		
		5	QPSK	816.50	22.58	V	3.00	-1.07	18.51	70.96	50.00	-31.49	1/12
				821.50	22.98	V	3.01	-1.04	18.93	78.16	50.00	-31.07	1/12
				826.50	24.51	V	3.01	-1.02	20.48	111.69	38.50	-18.02	1/12
				831.50	25.57	V	3.02	-0.99	21.55	142.89	38.50	-16.95	1/12
846.50	25.28		V	3.05	-0.92	21.31	135.21	38.50	-17.19	1/12			
16-QAM	816.50		21.61	V	3.00	-1.07	17.54	56.75	50.00	-32.46	1/12		
	821.50		21.76	V	3.01	-1.04	17.71	59.02	50.00	-32.29	1/12		
	826.50		23.57	V	3.01	-1.02	19.54	89.95	38.50	-18.96	1/12		
	831.50	24.48	V	3.02	-0.99	20.46	111.17	38.50	-18.04	1/12			
846.50	24.21	V	3.05	-0.92	20.24	105.68	38.50	-18.26	1/12				
3	QPSK	815.50	22.41	V	2.99	-1.07	18.34	68.23	50.00	-31.66	1/14		
		822.50	23.06	V	3.01	-1.04	19.01	79.62	50.00	-30.99	1/8		
		825.50	24.25	V	3.01	-1.02	20.22	105.20	38.50	-18.28	1/8		
		831.50	25.36	V	3.02	-0.99	21.34	136.14	38.50	-17.16	1/14		
		847.50	25.19	V	3.05	-0.91	21.23	132.74	38.50	-17.27	1/14		
	16-QAM	815.50	21.36	V	2.99	-1.07	17.29	53.58	50.00	-32.71	1/14		
		822.50	22.14	V	3.01	-1.04	18.09	64.42	50.00	-31.91	1/8		
		825.50	23.38	V	3.01	-1.02	19.35	86.10	38.50	-19.15	1/8		
		831.50	24.39	V	3.02	-0.99	20.37	108.89	38.50	-18.13	1/14		
		847.50	24.28	V	3.05	-0.91	20.32	107.65	38.50	-18.18	1/8		
		1.4	QPSK	814.70	22.38	V	2.99	-1.08	18.31	67.76	50.00	-31.69	1/3
				823.30	23.40	V	3.01	-1.03	19.36	86.30	50.00	-30.64	1/3
824.70	23.74			V	3.01	-1.03	17.70	58.88	38.50	-18.80	1/3		
831.50	24.24			V	3.02	-0.99	20.22	105.20	38.50	-18.28	1/3		
848.30	24.76			V	3.05	-0.91	20.80	120.23	38.50	-17.70	1/0		
16-QAM	814.70		21.31	V	2.99	-1.08	17.24	52.97	50.00	-32.76	1/3		
	823.30		22.48	V	3.01	-1.03	18.44	69.82	50.00	-31.56	1/3		
	824.70		22.69	V	3.01	-1.03	18.65	73.28	38.50	-19.85	1/3		
	831.50		23.27	V	3.02	-0.99	19.25	84.14	38.50	-19.25	1/3		
	848.30		23.54	V	3.05	-0.91	19.58	90.78	38.50	-18.92	1/3		

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
15	QPSK	824.00	22.87	V	3.01	-1.03	18.83	76.38	38.50	-19.67	1/37
	16-QAM		21.76	V	3.01	-1.03	17.72	59.16	38.50	-20.78	1/37
10	QPSK		23.34	V	3.01	-1.03	19.30	85.11	38.50	-19.20	1/25
	16-QAM		22.28	V	3.01	-1.03	18.24	66.68	38.50	-20.26	1/25
5	QPSK		23.84	V	3.01	-1.03	19.80	95.50	38.50	-18.70	1/12
	16-QAM		22.86	V	3.01	-1.03	18.82	76.21	38.50	-19.68	1/12
3	QPSK		24.16	V	3.01	-1.03	20.12	102.80	38.50	-18.38	1/8
	16-QAM		23.26	V	3.01	-1.03	19.22	83.56	38.50	-19.28	1/8
1.4	QPSK		23.64	V	3.01	-1.03	19.60	91.20	38.50	-18.90	1/3
	16-QAM		22.77	V	3.01	-1.03	18.73	74.64	38.50	-19.77	1/3

**LTE Band 26 (ANT A)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
15	QPSK	821.50	23.64	V	3.01	-1.04	19.59	90.99	50.00	-30.41	1/37
		831.50	22.30	V	3.02	-0.99	18.28	67.30	38.50	-20.22	1/37
		841.50	22.28	V	3.04	-0.94	18.30	67.61	38.50	-20.20	1/0
	16-QAM	821.50	22.66	V	3.01	-1.04	18.61	72.61	50.00	-31.39	1/37
		831.50	21.36	V	3.02	-0.99	17.34	54.20	38.50	-21.16	1/37
		841.50	21.83	V	3.04	-0.94	17.85	60.95	38.50	-20.65	1/37
10	QPSK	819.00	23.90	V	3.00	-1.06	19.85	96.61	50.00	-30.15	1/25
		829.00	22.45	V	3.02	-1.01	18.42	69.50	38.50	-20.08	1/25
		831.50	22.58	V	3.02	-0.99	18.56	71.78	38.50	-19.94	1/25
		844.00	23.07	V	3.04	-0.93	19.09	81.10	38.50	-19.41	1/25
	16-QAM	819.00	22.87	V	3.00	-1.06	18.82	76.21	50.00	-31.18	1/25
		829.00	21.55	V	3.02	-1.01	17.52	56.49	38.50	-20.98	1/25
		831.50	21.32	V	3.02	-0.99	17.30	53.70	38.50	-21.20	1/0
		844.00	21.95	V	3.04	-0.93	17.97	62.66	38.50	-20.53	1/0
		816.50	23.86	V	3.00	-1.07	19.79	95.28	50.00	-30.21	1/12
5	QPSK	821.50	23.98	V	3.01	-1.04	19.93	98.40	50.00	-30.07	1/12
		826.50	22.70	V	3.01	-1.02	18.67	73.62	38.50	-24.48	1/12
		831.50	22.75	V	3.02	-0.99	18.73	74.64	38.50	-24.87	1/12
		846.50	22.50	V	3.05	-0.92	18.53	71.29	38.50	-24.73	1/12
		816.50	22.84	V	3.00	-1.07	18.77	75.34	50.00	-31.23	1/12
		821.50	22.92	V	3.01	-1.04	18.87	77.09	50.00	-31.13	1/12
	16-QAM	826.50	21.65	V	3.01	-1.02	17.62	57.81	38.50	-20.88	1/12
		831.50	21.90	V	3.02	-0.99	17.88	61.38	38.50	-20.62	1/12
		846.50	21.49	V	3.05	-0.92	17.52	56.49	38.50	-20.98	1/12
3	QPSK	815.50	23.60	V	2.99	-1.07	19.53	89.74	50.00	-30.47	1/14
		822.50	23.94	V	3.01	-1.04	19.89	97.50	50.00	-30.11	1/8
		825.50	23.09	V	3.01	-1.02	19.06	80.54	38.50	-19.44	1/8
		831.50	22.96	V	3.02	-0.99	18.94	78.34	38.50	-19.56	1/14
		847.50	22.26	V	3.05	-0.91	18.30	67.61	38.50	-20.20	1/14
		815.50	22.56	V	2.99	-1.07	18.49	70.63	50.00	-31.51	1/14
	16-QAM	822.50	22.96	V	3.01	-1.04	18.91	77.80	50.00	-31.09	1/8
		825.50	22.05	V	3.01	-1.02	18.02	63.39	38.50	-20.48	1/8
		831.50	21.94	V	3.02	-0.99	17.92	61.94	38.50	-20.58	1/14
1.4	QPSK	814.70	23.90	V	2.99	-1.08	19.83	96.16	50.00	-30.17	1/3
		823.30	23.68	V	3.01	-1.03	19.64	92.04	50.00	-30.36	1/3
		824.70	21.76	V	3.01	-1.03	17.72	59.16	38.50	-20.78	1/3
		831.50	22.46	V	3.02	-0.99	18.44	69.82	38.50	-20.06	1/3
		848.30	22.02	V	3.05	-0.91	18.06	63.97	38.50	-20.44	1/0
		814.70	22.81	V	2.99	-1.08	18.74	74.82	50.00	-31.26	1/3
	16-QAM	823.30	22.63	V	3.01	-1.03	18.59	72.28	50.00	-31.41	1/3
		824.70	20.77	V	3.01	-1.03	16.73	47.10	38.50	-21.77	1/3
		831.50	21.66	V	3.02	-0.99	17.64	58.08	38.50	-20.86	1/3
848.30	20.97	V	3.05	-0.91	17.01	50.23	38.50	-21.49	1/3		

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
15	QPSK	824.00	22.12	V	3.01	-1.03	18.08	64.27	38.50	-20.42	1/37
	16-QAM		21.21	V	3.01	-1.03	17.17	52.12	38.50	-21.33	1/37
10	QPSK		22.27	V	3.01	-1.03	18.23	66.53	38.50	-20.27	1/25
	16-QAM		21.25	V	3.01	-1.03	17.21	52.60	38.50	-21.29	1/25
5	QPSK		22.68	V	3.01	-1.03	18.64	73.11	38.50	-19.86	1/12
	16-QAM		21.68	V	3.01	-1.03	17.64	58.08	38.50	-20.86	1/12
3	QPSK		23.02	V	3.01	-1.03	18.98	79.07	38.50	-19.52	1/8
	16-QAM		22.07	V	3.01	-1.03	18.03	63.53	38.50	-20.47	1/8
1.4	QPSK		21.91	V	3.01	-1.03	17.87	61.24	38.50	-20.63	1/3
	16-QAM		20.93	V	3.01	-1.03	16.89	48.87	38.50	-21.61	1/3



**NR Band n5 (ANT A+B)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
20	QPSK	834.00	23.68	V	3.03	-0.98	19.67	92.68	38.50	-18.83	1/104
		836.50	23.94	V	3.03	-0.97	19.95	98.86	38.50	-18.55	1/53
		839.00	24.33	V	3.03	-0.96	20.34	108.14	38.50	-18.16	1/53
	16-QAM	834.00	21.95	V	3.03	-0.98	17.94	62.23	38.50	-20.56	1/104
		836.50	22.64	V	3.03	-0.97	18.65	73.28	38.50	-19.85	1/53
		839.00	22.84	V	3.03	-0.96	18.85	76.74	38.50	-19.65	1/53
15	QPSK	831.50	23.51	V	3.02	-0.99	19.49	88.92	38.50	-19.01	1/40
		836.50	24.40	V	3.03	-0.97	20.41	109.90	38.50	-18.09	1/77
		841.50	24.50	V	3.04	-0.94	20.52	112.72	38.50	-17.98	1/40
	16-QAM	831.50	21.92	V	3.02	-0.99	17.90	61.66	38.50	-20.60	1/40
		836.50	22.63	V	3.03	-0.97	18.64	73.11	38.50	-19.86	1/77
		841.50	22.96	V	3.04	-0.94	18.98	79.07	38.50	-19.52	1/40
10	QPSK	829.00	23.13	V	3.02	-1.01	17.10	51.29	38.50	-19.40	1/26
		836.50	23.99	V	3.03	-0.97	20.00	100.00	38.50	-18.50	1/1
		844.00	23.86	V	3.04	-0.93	19.88	97.27	38.50	-18.62	1/26
	16-QAM	829.00	21.90	V	3.02	-1.01	17.87	61.24	38.50	-20.63	1/26
		836.50	22.73	V	3.03	-0.97	18.74	74.82	38.50	-19.76	1/1
		844.00	22.68	V	3.04	-0.93	18.70	74.13	38.50	-19.80	1/26
5	QPSK	826.50	22.87	V	3.01	-1.02	18.84	76.56	38.50	-19.66	1/1
		836.50	23.78	V	3.03	-0.97	19.79	95.28	38.50	-18.71	1/1
		846.50	24.15	V	3.05	-0.92	20.18	104.23	38.50	-18.32	1/1
	16-QAM	826.50	21.40	V	3.01	-1.02	17.37	54.58	38.50	-21.13	1/1
		836.50	22.60	V	3.03	-0.97	18.61	72.61	38.50	-19.89	1/1
		846.50	22.65	V	3.05	-0.92	18.68	73.79	38.50	-19.82	1/1

**NR Band n5 (ANT A)**

BW (MHz)	Modulation	f (MHz)	SG reading (dBm)	Ant. Pol. (H/V)	Cable Loss (dB)	Antenna Gain (dBd)	ERP (dBm)	ERP (mW)	Limit (dBm)	Delta (dB)	RB
20	QPSK	834.00	22.47	V	3.03	-0.98	18.46	70.15	38.50	-20.04	1/53
		836.50	23.16	V	3.03	-0.97	19.17	82.60	38.50	-19.33	1/53
		839.00	23.12	V	3.03	-0.96	19.13	81.85	38.50	-19.37	1/53
	16-QAM	834.00	21.49	V	3.03	-0.98	17.48	55.98	38.50	-21.02	1/53
		836.50	21.92	V	3.03	-0.97	17.93	62.09	38.50	-20.57	1/53
		839.00	21.88	V	3.03	-0.96	17.89	61.52	38.50	-20.61	1/53
15	QPSK	831.50	22.88	V	3.02	-0.99	18.86	76.91	38.50	-19.64	1/40
		836.50	23.12	V	3.03	-0.97	19.13	81.85	38.50	-19.37	1/40
		841.50	23.36	V	3.04	-0.94	19.38	86.70	38.50	-19.12	1/40
	16-QAM	831.50	21.76	V	3.02	-0.99	17.74	59.43	38.50	-20.76	1/40
		836.50	21.81	V	3.03	-0.97	17.82	60.53	38.50	-20.68	1/40
		841.50	22.04	V	3.04	-0.94	18.06	63.97	38.50	-20.44	1/40
10	QPSK	829.00	22.92	V	3.02	-1.01	18.89	77.45	38.50	-19.61	1/26
		836.50	22.91	V	3.03	-0.97	18.92	77.98	38.50	-19.58	1/26
		844.00	22.70	V	3.04	-0.93	18.72	74.47	38.50	-19.78	1/26
	16-QAM	829.00	21.78	V	3.02	-1.01	17.75	59.57	38.50	-20.75	1/26
		836.50	21.88	V	3.03	-0.97	17.89	61.52	38.50	-20.61	1/26
		844.00	21.59	V	3.04	-0.93	17.61	57.68	38.50	-20.89	1/26
5	QPSK	826.50	23.13	V	3.01	-1.02	19.10	81.28	38.50	-19.40	1/13
		836.50	22.95	V	3.03	-0.97	18.96	78.70	38.50	-19.54	1/13
		846.50	23.11	V	3.05	-0.92	19.14	82.04	38.50	-19.36	1/13
	16-QAM	826.50	22.04	V	3.01	-1.02	18.01	63.24	38.50	-20.49	1/13
		836.50	21.83	V	3.03	-0.97	17.84	60.81	38.50	-20.66	1/13
		846.50	22.08	V	3.05	-0.92	18.11	64.71	38.50	-20.39	1/13

## 9.2. RADIATED SPURIOUS EMISSION

### RULE PART(S)

FCC: §2.1053, §22.917 and §90.691

### LIMIT

Part 22.917(a)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

Part 90.543(c)

On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least  $43 + 10 \log(P)$  dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz

Part 90.691(a):

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz. (NOTE : Use 100kHz reference bandwidth)

(b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

### TEST PROCEDURE

ANSI / TIA / EIA 603 E Clause 2.2.12; ESU40 setting reference to 971168 D01 v03r01

For peak power measurement with a ESU40:

- a) Set the RBW = 100 kHz for emission below 1 GHz and 1 MHz for emissions above 1 GHz
- b) Set VBW  $\geq 3 \times$  RBW;
- c) Set span  $\geq 1.5$  times the OBW;
- d) Sweep time = auto couple;
- e) Detector = rms;
- f) Ensure that the number of measurement points  $\geq$  span/RBW;
- g) Trace mode = average(WCDMA, LTE, 5G NR), Maxhold(GSM);

### NOTE1

Please refer to section 5.4 for bandwidth and RB setting about LTE, 5G NR bands.

### RESULTS

See the following pages.

### 9.2.1. SPURIOUS RADIATION PLOTS

#### GSM850 (ANT A+B)

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		Samsung							
Project #:		4790841160							
Date:		2023-06-16							
Test Engineer:		24542							
Configuration:		EUT / AC Adapter, Z-Position, HF							
Location:		Chamber 1							
Mode:		GPRS 850 MHz Harmonics							
Test Voltage:		AC 120 V, 60 Hz							
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 824.2MHz</b>									
1648.40	-12.3	V	3.0	46.4	1.0	-57.7	-13.0	-44.7	
2472.60	0.9	V	3.0	46.9	1.0	-45.0	-13.0	-32.0	
3296.80	-8.4	V	3.0	46.6	1.0	-54.1	-13.0	-41.1	
4121.00	-7.7	V	3.0	45.7	1.0	-52.4	-13.0	-39.4	
4945.20	-6.4	V	3.0	46.2	1.0	-51.6	-13.0	-38.6	
1648.40	-13.9	H	3.0	46.4	1.0	-59.3	-13.0	-46.3	
2472.60	-0.7	H	3.0	46.9	1.0	-46.6	-13.0	-33.6	
3296.80	-8.2	H	3.0	46.6	1.0	-53.8	-13.0	-40.8	
4121.00	-6.5	H	3.0	45.7	1.0	-51.2	-13.0	-38.2	
4945.20	-6.3	H	3.0	46.2	1.0	-51.5	-13.0	-38.5	
<b>Mid Ch, 836.6MHz</b>									
1673.20	-12.1	V	3.0	46.4	1.0	-57.5	-13.0	-44.5	
2509.80	-3.2	V	3.0	46.9	1.0	-49.1	-13.0	-36.1	
3346.40	-8.2	V	3.0	46.6	1.0	-53.8	-13.0	-40.8	
4183.00	-7.5	V	3.0	45.7	1.0	-52.3	-13.0	-39.3	
5019.60	-6.4	V	3.0	46.2	1.0	-51.6	-13.0	-38.6	
1673.20	-13.2	H	3.0	46.4	1.0	-58.7	-13.0	-45.7	
2509.80	-0.1	H	3.0	46.9	1.0	-46.0	-13.0	-33.0	
3346.40	-8.0	H	3.0	46.6	1.0	-53.5	-13.0	-40.5	
4183.00	-6.9	H	3.0	45.7	1.0	-51.6	-13.0	-38.6	
5019.60	-6.2	H	3.0	46.2	1.0	-51.5	-13.0	-38.5	
<b>High Ch, 848.8MHz</b>									
1697.60	-12.8	V	3.0	46.5	1.0	-58.3	-13.0	-45.3	
2546.40	-5.2	V	3.0	46.9	1.0	-51.1	-13.0	-38.1	
3395.20	-9.2	V	3.0	46.5	1.0	-54.7	-13.0	-41.7	
4244.00	-7.1	V	3.0	45.8	1.0	-51.9	-13.0	-38.9	
5092.80	-6.2	V	3.0	46.2	1.0	-51.4	-13.0	-38.4	
1697.60	-13.2	H	3.0	46.5	1.0	-58.7	-13.0	-45.7	
2546.40	-0.6	H	3.0	46.9	1.0	-46.5	-13.0	-33.5	
3395.20	-7.8	H	3.0	46.5	1.0	-53.3	-13.0	-40.3	
4244.00	-6.5	H	3.0	45.8	1.0	-51.3	-13.0	-38.3	
5092.80	-6.0	H	3.0	46.2	1.0	-51.2	-13.0	-38.2	

GPRS

**GSM850 (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
GPRS	Company: Samsung										
	Project #: 4790841160										
	Date: 2023-06-15										
	Test Engineer: 51078										
	Configuration: EUT / AC Adapter, Z-Position, FF										
	Location: Chamber 2										
	Mode: GPRS 850 MHz Harmonics										
	Test Voltage: AC 120 V, 60 Hz										
	<b>Low Ch, 824.2MHz</b>										
		1648.40	-14.0	V	3.0	40.7	1.0	-53.7	-13.0	-40.7	
		2472.60	-10.5	V	3.0	41.3	1.0	-50.7	-13.0	-37.7	
		3296.80	-8.7	V	3.0	42.1	1.0	-49.7	-13.0	-36.7	
		1648.40	-14.7	H	3.0	40.7	1.0	-54.4	-13.0	-41.4	
		2472.60	-10.3	H	3.0	41.3	1.0	-50.6	-13.0	-37.6	
		3296.80	-9.0	H	3.0	42.1	1.0	-50.0	-13.0	-37.0	
	<b>Mid Ch, 836.6MHz</b>										
		1673.20	-13.9	V	3.0	40.7	1.0	-53.5	-13.0	-40.5	
		2509.80	-9.5	V	3.0	41.3	1.0	-49.8	-13.0	-36.8	
		3346.40	-8.2	V	3.0	42.1	1.0	-49.2	-13.0	-36.2	
		1673.20	-14.4	H	3.0	40.7	1.0	-54.1	-13.0	-41.1	
		2509.80	-9.7	H	3.0	41.3	1.0	-50.0	-13.0	-37.0	
		3346.40	-8.6	H	3.0	42.1	1.0	-49.7	-13.0	-36.7	
	<b>High Ch, 848.8MHz</b>										
		1697.60	-14.0	V	3.0	40.7	1.0	-53.7	-13.0	-40.7	
	2546.40	-8.9	V	3.0	41.4	1.0	-49.3	-13.0	-36.3		
	3395.20	-8.1	V	3.0	42.1	1.0	-49.2	-13.0	-36.2		
	1697.60	-14.6	H	3.0	40.7	1.0	-54.3	-13.0	-41.3		
	2546.40	-10.1	H	3.0	41.4	1.0	-50.5	-13.0	-37.5		
	3395.20	-8.2	H	3.0	42.1	1.0	-49.3	-13.0	-36.3		

**WCDMA Band 5 (ANT A+B)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
REL99		Company: Samsung Project #: 4790841160 Date: 2023-06-16 Test Engineer: 19568 Configuration: EUT / AC Adapter, Z-Position, HF Location: Chamber 1 Mode: Rel99 Band 5 Harmonics Test Voltage: AC 120 V, 60 Hz										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes	
		MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)		
		<b>Low Ch, 826.5MHz</b>										
		1652.80	-14.5	V	3.0	46.4	1.0	-60.0	-13.0	-47.0		
		2479.20	-11.4	V	3.0	46.9	1.0	-57.3	-13.0	-44.3		
		3305.60	-9.6	V	3.0	46.6	1.0	-55.2	-13.0	-42.2		
		1652.80	-15.5	H	3.0	46.4	1.0	-61.0	-13.0	-48.0		
		2479.20	-12.0	H	3.0	46.9	1.0	-57.8	-13.0	-44.8		
		3305.60	-9.5	H	3.0	46.6	1.0	-55.1	-13.0	-42.1		
<b>Mid Ch, 836.6MHz</b>												
1673.20	-14.4	V	3.0	46.4	1.0	-59.9	-13.0	-46.9				
2509.80	-11.5	V	3.0	46.9	1.0	-57.4	-13.0	-44.4				
3346.40	-9.4	V	3.0	46.6	1.0	-54.9	-13.0	-41.9				
1673.20	-15.4	H	3.0	46.4	1.0	-60.9	-13.0	-47.9				
2509.80	-11.9	H	3.0	46.9	1.0	-57.8	-13.0	-44.8				
3346.40	-9.2	H	3.0	46.6	1.0	-54.8	-13.0	-41.8				
<b>High Ch, 846.6MHz</b>												
1693.20	-14.5	V	3.0	46.5	1.0	-59.9	-13.0	-46.9				
2539.80	-11.5	V	3.0	46.9	1.0	-57.4	-13.0	-44.4				
3386.40	-9.2	V	3.0	46.5	1.0	-54.7	-13.0	-41.7				
1693.20	-15.4	H	3.0	46.5	1.0	-60.8	-13.0	-47.8				
2539.80	-11.8	H	3.0	46.9	1.0	-57.7	-13.0	-44.7				
3386.40	-9.1	H	3.0	46.5	1.0	-54.6	-13.0	-41.6				

**WCDMA Band 5 (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
REL99		Company: Samsung Project #: 4790841160 Date: 2023-06-15 Test Engineer: 51078 Configuration: EUT / AC Adapter, Z-Position, FF Location: Chamber 2 Mode: Rel99 Band 5 Harmonics Test Voltage: AC 120 V, 60 Hz										
		f	SG reading	Ant. Pol.	Distance	Preamp	Filter	EIRP	Limit	Delta	Notes	
		MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)		
		<b>Low Ch, 826.4MHz</b>										
		1652.80	-15.2	V	3.0	40.7	1.0	-54.9	-13.0	-41.9		
		2479.20	-12.4	V	3.0	41.3	1.0	-52.7	-13.0	-39.7		
		3305.60	-9.9	V	3.0	42.1	1.0	-51.0	-13.0	-38.0		
		1652.80	-15.8	H	3.0	40.7	1.0	-55.5	-13.0	-42.5		
		2479.20	-12.6	H	3.0	41.3	1.0	-52.9	-13.0	-39.9		
		3305.60	-10.1	H	3.0	42.1	1.0	-51.2	-13.0	-38.2		
<b>Mid Ch, 836.6MHz</b>												
1673.20	-15.1	V	3.0	40.7	1.0	-54.8	-13.0	-41.8				
2509.80	-12.4	V	3.0	41.3	1.0	-52.7	-13.0	-39.7				
3346.40	-9.7	V	3.0	42.1	1.0	-50.7	-13.0	-37.7				
1673.20	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4				
2509.80	-12.6	H	3.0	41.3	1.0	-52.9	-13.0	-39.9				
3346.40	-9.9	H	3.0	42.1	1.0	-50.9	-13.0	-37.9				
<b>High Ch, 846.6MHz</b>												
1693.20	-15.1	V	3.0	40.7	1.0	-54.8	-13.0	-41.8				
2539.80	-12.2	V	3.0	41.4	1.0	-52.6	-13.0	-39.6				
3386.40	-9.4	V	3.0	42.1	1.0	-50.5	-13.0	-37.5				
1693.20	-15.8	H	3.0	40.7	1.0	-55.4	-13.0	-42.4				
2539.80	-12.4	H	3.0	41.4	1.0	-52.8	-13.0	-39.8				
3386.40	-9.6	H	3.0	42.1	1.0	-50.7	-13.0	-37.7				

**LTE Band 5 (ANT A+B)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Saamsung Project #: 4790841160 Date: 2023-06-16 Test Engineer: 19568 Configuration: EUT / AC Adapter, Z-Position, HF Location: Chamber 1 Mode: LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth Test Votage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Ch, 829MHz</b>										
1658.00	-14.3	V	3.0	46.4	1.0	-59.8	-13.0	-46.8		
2487.00	-10.9	V	3.0	46.9	1.0	-56.7	-13.0	-43.7		
3316.00	-9.5	V	3.0	46.6	1.0	-55.1	-13.0	-42.1		
1658.00	-15.5	H	3.0	46.4	1.0	-60.9	-13.0	-47.9		
2487.00	-11.7	H	3.0	46.9	1.0	-57.6	-13.0	-44.6		
3316.00	-9.3	H	3.0	46.6	1.0	-54.9	-13.0	-41.9		
<b>Mid Ch, 836.5MHz</b>										
1673.00	-14.3	V	3.0	46.4	1.0	-59.8	-13.0	-46.8		
2509.50	-10.3	V	3.0	46.9	1.0	-56.2	-13.0	-43.2		
3346.00	-9.3	V	3.0	46.6	1.0	-54.9	-13.0	-41.9		
1673.00	-15.4	H	3.0	46.4	1.0	-60.8	-13.0	-47.8		
2509.50	-10.5	H	3.0	46.9	1.0	-56.4	-13.0	-43.4		
3346.00	-9.1	H	3.0	46.6	1.0	-54.7	-13.0	-41.7		
<b>High Ch, 844MHz</b>										
1688.00	-14.4	V	3.0	46.5	1.0	-59.8	-13.0	-46.8		
2532.00	-11.3	V	3.0	46.9	1.0	-57.2	-13.0	-44.2		
3376.00	-9.1	V	3.0	46.5	1.0	-54.7	-13.0	-41.7		
1688.00	-15.3	H	3.0	46.5	1.0	-60.7	-13.0	-47.7		
2532.00	-11.1	H	3.0	46.9	1.0	-57.0	-13.0	-44.0		
3376.00	-8.9	H	3.0	46.5	1.0	-54.4	-13.0	-41.4		

**LTE Band 5 (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Samsung Project #: 4790841160 Date: 2023-06-16 Test Engineer: 26087 Configuration: EUT / AC Adapter, Z-Position, FF Location: Chamber 2 Mode: LTE_QPSK Band 5 Harmonics, 5MHz Bandwidth Test Votage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Ch, 826.5MHz</b>										
1653.00	-15.1	V	3.0	40.7	1.0	-54.8	-13.0	-41.8		
2479.50	-12.3	V	3.0	41.3	1.0	-52.6	-13.0	-39.6		
3306.00	-9.9	V	3.0	42.1	1.0	-51.0	-13.0	-38.0		
1653.00	-15.9	H	3.0	40.7	1.0	-55.6	-13.0	-42.6		
2479.50	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7		
3306.00	-10.2	H	3.0	42.1	1.0	-51.2	-13.0	-38.2		
<b>Mid Ch, 836.5MHz</b>										
1673.00	-15.0	V	3.0	40.7	1.0	-54.7	-13.0	-41.7		
2509.50	-11.6	V	3.0	41.3	1.0	-52.0	-13.0	-39.0		
3346.00	-9.6	V	3.0	42.1	1.0	-50.7	-13.0	-37.7		
1673.00	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2509.50	-12.1	H	3.0	41.3	1.0	-52.4	-13.0	-39.4		
3346.00	-9.8	H	3.0	42.1	1.0	-50.9	-13.0	-37.9		
<b>High Ch, 846.5MHz</b>										
1693.00	-15.2	V	3.0	40.7	1.0	-54.9	-13.0	-41.9		
2539.50	-11.6	V	3.0	41.4	1.0	-52.0	-13.0	-39.0		
3386.00	-9.4	V	3.0	42.1	1.0	-50.4	-13.0	-37.4		
1693.00	-15.8	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2539.50	-12.1	H	3.0	41.4	1.0	-52.4	-13.0	-39.4		
3386.00	-9.6	H	3.0	42.1	1.0	-50.6	-13.0	-37.6		

**LTE Band 26 (Part 90) (ANT A+B)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		<b>Company:</b>	Samsung								
		<b>Project #:</b>	4790841160								
		<b>Date:</b>	2023-06-15								
		<b>Test Engineer:</b>	51078								
		<b>Configuration:</b>	EUT / AC Adapter, Z-Position, Open								
		<b>Location:</b>	Chamber 1								
		<b>Mode:</b>	LTE_QPSK Band 26 Harmonics, 1.4MHz Bandwidth								
		<b>Test Votage:</b>	AC 120 V, 60 Hz								
1.4 MHz	QPSK	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 814.7MHz</b>											
		1629.40	-14.4	V	3.0	46.4	1.0	-59.8	-13.0	-46.8	
		2444.10	-5.2	V	3.0	46.9	1.0	-51.0	-13.0	-38.0	
		3258.80	-9.6	V	3.0	46.7	1.0	-55.2	-13.0	-42.2	
		1629.40	-15.2	H	3.0	46.4	1.0	-60.6	-13.0	-47.6	
		2444.10	-6.9	H	3.0	46.9	1.0	-52.7	-13.0	-39.7	
		3258.80	-9.4	H	3.0	46.7	1.0	-55.1	-13.0	-42.1	
<b>Mid Ch, 823.3MHz</b>											
		1646.60	-13.6	V	3.0	46.4	1.0	-59.0	-13.0	-46.0	
		2469.90	-2.9	V	3.0	46.9	1.0	-48.8	-13.0	-35.8	
		3293.20	-9.6	V	3.0	46.6	1.0	-55.2	-13.0	-42.2	
		1646.60	-14.2	H	3.0	46.4	1.0	-59.6	-13.0	-46.6	
		2469.90	-3.6	H	3.0	46.9	1.0	-49.5	-13.0	-36.5	
		3293.20	-9.4	H	3.0	46.6	1.0	-55.1	-13.0	-42.1	

**LTE Band 26 (Part 90) (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
		<b>Company:</b>	Samsung								
		<b>Project #:</b>	4790841160								
		<b>Date:</b>	2023-06-16								
		<b>Test Engineer:</b>	19568								
		<b>Configuration:</b>	EUT / AC Adapter, Z-Position, FF								
		<b>Location:</b>	Chamber 2								
		<b>Mode:</b>	LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth								
		<b>Test Votage:</b>	AC 120 V, 60 Hz								
5 MHz	QPSK	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 816.5MHz</b>											
		1633.00	-15.4	V	3.0	40.7	1.0	-55.0	-13.0	-42.0	
		2449.50	-12.4	V	3.0	41.3	1.0	-52.6	-13.0	-39.6	
		3266.00	-10.0	V	3.0	42.1	1.0	-51.1	-13.0	-38.1	
		1633.00	-15.9	H	3.0	40.7	1.0	-55.6	-13.0	-42.6	
		2449.50	-12.5	H	3.0	41.3	1.0	-52.8	-13.0	-39.8	
		3266.00	-10.4	H	3.0	42.1	1.0	-51.4	-13.0	-38.4	
<b>Mid Ch, 821.5MHz</b>											
		1643.00	-15.3	V	3.0	40.7	1.0	-55.0	-13.0	-42.0	
		2464.50	-12.3	V	3.0	41.3	1.0	-52.6	-13.0	-39.6	
		3286.00	-10.0	V	3.0	42.1	1.0	-51.1	-13.0	-38.1	
		1643.00	-16.0	H	3.0	40.7	1.0	-55.7	-13.0	-42.7	
		2464.50	-12.5	H	3.0	41.3	1.0	-52.7	-13.0	-39.7	
		3286.00	-10.2	H	3.0	42.1	1.0	-51.3	-13.0	-38.3	

**LTE Band 26 (Straddle) (ANT A+B)**

3 MHz  QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	<b>Company:</b> Samsung <b>Project #:</b> 4790841160 <b>Date:</b> 2023-06-15 <b>Test Engineer:</b> 51078 <b>Configuration:</b> EUT / AC Adapter, Z-Position, Open <b>Location:</b> Chamber 1 <b>Mode:</b> LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth <b>Test Votage:</b> AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch, 824MHz									
	1648.00	-13.3	V	3.0	46.4	1.0	-58.7	-13.0	-45.7	
	2472.00	-4.3	V	3.0	46.9	1.0	-50.2	-13.0	-37.2	
	3296.00	-9.5	V	3.0	46.6	1.0	-55.1	-13.0	-42.1	
	1648.00	-13.5	H	3.0	46.4	1.0	-58.9	-13.0	-45.9	
	2472.00	-6.1	H	3.0	46.9	1.0	-52.0	-13.0	-39.0	
	3296.00	-9.5	H	3.0	46.6	1.0	-55.1	-13.0	-42.1	

**LTE Band 26 (Straddle) (ANT A)**

3 MHz  QPSK	UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
	<b>Company:</b> Samsung <b>Project #:</b> 4790841160 <b>Date:</b> 2023-06-16 <b>Test Engineer:</b> 51078 <b>Configuration:</b> EUT / AC Adapter, Z-Position, FF <b>Location:</b> Chamber 2 <b>Mode:</b> LTE_QPSK Band 26 Harmonics, 3MHz Bandwidth <b>Test Votage:</b> AC 120 V, 60 Hz									
	f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
	Straddle Ch, 824MHz									
	1648.00	-15.2	V	3.0	40.7	1.0	-54.9	-13.0	-41.9	
	2472.00	-12.2	V	3.0	41.3	1.0	-52.5	-13.0	-39.5	
	3296.00	-10.0	V	3.0	42.1	1.0	-51.1	-13.0	-38.1	
	1648.00	-15.9	H	3.0	40.7	1.0	-55.6	-13.0	-42.6	
	2472.00	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7	
	3296.00	-10.2	H	3.0	42.1	1.0	-51.2	-13.0	-38.2	



**LTE Band 26 (Part 22) (ANT A+B)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Samsung Project #: 4790841160 Date: 2023-06-14 Test Engineer: 24542 Configuration: EUT / AC Adapter, Z-Position, Open Location: Chamber 1 Mode: LTE_QPSK Band 26 Harmonics, 5MHz Bandwidth Test Voltage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
5 MHz										
QPSK										
Low Ch, 826.5MHz										
1653.00	-11.1	V	3.0	46.4	1.0	-56.5	-13.0	-43.5		
2479.50	-3.0	V	3.0	46.9	1.0	-48.9	-13.0	-35.9		
3306.00	-9.5	V	3.0	46.6	1.0	-55.2	-13.0	-42.2		
1653.00	-10.6	H	3.0	46.4	1.0	-56.1	-13.0	-43.1		
2479.50	-4.5	H	3.0	46.9	1.0	-50.4	-13.0	-37.4		
3306.00	-9.3	H	3.0	46.6	1.0	-55.0	-13.0	-42.0		
Mid Ch, 831.5MHz										
1663.00	-14.4	V	3.0	46.4	1.0	-59.8	-13.0	-46.8		
2494.50	-3.6	V	3.0	46.9	1.0	-49.5	-13.0	-36.5		
3326.00	-9.5	V	3.0	46.6	1.0	-55.1	-13.0	-42.1		
1663.00	-15.1	H	3.0	46.4	1.0	-60.5	-13.0	-47.5		
2494.50	-4.2	H	3.0	46.9	1.0	-50.0	-13.0	-37.0		
3326.00	-9.4	H	3.0	46.6	1.0	-55.0	-13.0	-42.0		
High Ch, 846.5MHz										
1693.00	-13.1	V	3.0	46.5	1.0	-58.6	-13.0	-45.6		
2539.50	-2.3	V	3.0	46.9	1.0	-48.2	-13.0	-35.2		
3386.00	-9.2	V	3.0	46.5	1.0	-54.7	-13.0	-41.7		
1693.00	-13.8	H	3.0	46.5	1.0	-59.3	-13.0	-46.3		
2539.50	-4.8	H	3.0	46.9	1.0	-50.7	-13.0	-37.7		
3386.00	-9.0	H	3.0	46.5	1.0	-54.5	-13.0	-41.5		

**LTE Band 26 (Part 22) (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Samsung Project #: 4790841160 Date: 2023-06-16 Test Engineer: 19568 Configuration: EUT / AC Adapter, Z-Position, FF Location: Chamber 2 Mode: LTE_QPSK Band 26 Harmonics, 10MHz Bandwidth Test Voltage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
10 MHz										
QPSK										
Low Ch, 829MHz										
1658.00	-15.1	V	3.0	40.7	1.0	-54.7	-13.0	-41.7		
2487.00	-12.1	V	3.0	41.3	1.0	-52.4	-13.0	-39.4		
3316.00	-9.8	V	3.0	42.1	1.0	-50.9	-13.0	-37.9		
1658.00	-15.6	H	3.0	40.7	1.0	-55.3	-13.0	-42.3		
2487.00	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7		
3316.00	-10.2	H	3.0	42.1	1.0	-51.2	-13.0	-38.2		
Mid Ch, 831.5MHz										
1663.00	-14.9	V	3.0	40.7	1.0	-54.6	-13.0	-41.6		
2494.50	-12.2	V	3.0	41.3	1.0	-52.5	-13.0	-39.5		
3326.00	-9.7	V	3.0	42.1	1.0	-50.8	-13.0	-37.8		
1663.00	-15.6	H	3.0	40.7	1.0	-55.3	-13.0	-42.3		
2494.50	-12.4	H	3.0	41.3	1.0	-52.7	-13.0	-39.7		
3326.00	-10.1	H	3.0	42.1	1.0	-51.1	-13.0	-38.1		
High Ch, 844MHz										
1688.00	-15.0	V	3.0	40.7	1.0	-54.7	-13.0	-41.7		
2532.00	-11.6	V	3.0	41.4	1.0	-52.0	-13.0	-39.0		
3376.00	-9.5	V	3.0	42.1	1.0	-50.5	-13.0	-37.5		
1688.00	-15.5	H	3.0	40.7	1.0	-55.2	-13.0	-42.2		
2532.00	-12.2	H	3.0	41.4	1.0	-52.6	-13.0	-39.6		
3376.00	-9.6	H	3.0	42.1	1.0	-50.7	-13.0	-37.7		

**NR Band 5 (ANT A+B)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Samsung Project #: 4790841160 Date: 2023-06-21 Test Engineer: 25546 Configuration: EUT / AC Adapter, Z-Position, HF Location: Chamber 2 Mode: 5G NR_QPSK NR n5 Harmonics, 15MHz Bandwidth Test Voltage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Ch, 831.5MHz</b>										
1663.00	-15.1	V	3.0	40.7	1.0	-54.8	-13.0	-41.8		
2494.50	-12.1	V	3.0	41.3	1.0	-52.4	-13.0	-39.4		
3326.00	-9.8	V	3.0	42.1	1.0	-50.8	-13.0	-37.8		
1663.00	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2494.50	-12.2	H	3.0	41.3	1.0	-52.5	-13.0	-39.5		
3326.00	-10.0	H	3.0	42.1	1.0	-51.0	-13.0	-38.0		
<b>Mid Ch, 836.5MHz</b>										
1673.00	-15.1	V	3.0	40.7	1.0	-54.7	-13.0	-41.7		
2509.50	-12.0	V	3.0	41.3	1.0	-52.4	-13.0	-39.4		
3346.00	-9.4	V	3.0	42.1	1.0	-50.5	-13.0	-37.5		
1673.00	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2509.50	-12.2	H	3.0	41.3	1.0	-52.5	-13.0	-39.5		
3346.00	-9.7	H	3.0	42.1	1.0	-50.8	-13.0	-37.8		
<b>High Ch, 841.5MHz</b>										
1683.00	-14.9	V	3.0	40.7	1.0	-54.6	-13.0	-41.6		
2524.50	-11.8	V	3.0	41.4	1.0	-52.2	-13.0	-39.2		
3366.00	-9.4	V	3.0	42.1	1.0	-50.5	-13.0	-37.5		
1683.00	-15.6	H	3.0	40.7	1.0	-55.3	-13.0	-42.3		
2524.50	-12.2	H	3.0	41.4	1.0	-52.6	-13.0	-39.6		
3366.00	-9.7	H	3.0	42.1	1.0	-50.7	-13.0	-37.7		

15 MHz  
QPSK

**NR Band 5 (ANT A)**

		UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement								
		Company: Samsung Project #: 4790841160 Date: 2023-06-19 Test Engineer: 19568 Configuration: EUT / AC Adapter, Z-Position, FF Location: Chamber 2 Mode: 5G NR_QPSK NR n5 Harmonics, 15MHz Bandwidth Test Voltage: AC 120 V, 60 Hz								
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
<b>Low Ch, 831.5MHz</b>										
1663.00	-15.2	V	3.0	40.7	1.0	-54.8	-13.0	-41.8		
2494.50	-12.3	V	3.0	41.3	1.0	-52.6	-13.0	-39.6		
3326.00	-10.0	V	3.0	42.1	1.0	-51.0	-13.0	-38.0		
1663.00	-15.9	H	3.0	40.7	1.0	-55.5	-13.0	-42.5		
2494.50	-11.7	H	3.0	41.3	1.0	-52.0	-13.0	-39.0		
3326.00	-10.1	H	3.0	42.1	1.0	-51.2	-13.0	-38.2		
<b>Mid Ch, 836.5MHz</b>										
1673.00	-15.2	V	3.0	40.7	1.0	-54.9	-13.0	-41.9		
2509.50	-11.9	V	3.0	41.3	1.0	-52.3	-13.0	-39.3		
3346.00	-9.6	V	3.0	42.1	1.0	-50.7	-13.0	-37.7		
1673.00	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2509.50	-11.7	H	3.0	41.3	1.0	-52.0	-13.0	-39.0		
3346.00	-9.8	H	3.0	42.1	1.0	-50.9	-13.0	-37.9		
<b>High Ch, 841.5MHz</b>										
1683.00	-15.1	V	3.0	40.7	1.0	-54.8	-13.0	-41.8		
2524.50	-9.8	V	3.0	41.4	1.0	-50.1	-13.0	-37.1		
3366.00	-9.7	V	3.0	42.1	1.0	-50.7	-13.0	-37.7		
1683.00	-15.7	H	3.0	40.7	1.0	-55.4	-13.0	-42.4		
2524.50	-8.8	H	3.0	41.4	1.0	-49.2	-13.0	-36.2		
3366.00	-9.7	H	3.0	42.1	1.0	-50.8	-13.0	-37.8		

15 MHz  
QPSK

**END OF REPORT**