

Measurement Report for SM-F956D, CHEEK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-1), Channel 190 (836.6 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	GSM 850	GSM, 10024-DAC	836.6	8.24	0.920	41.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.118	0.123
psSAR10g [W/Kg]	0.081	0.095
Power Drift [dB]		0.12
M2/M1 [%]		89.1
Dist 3dB Peak [mm]		13.4

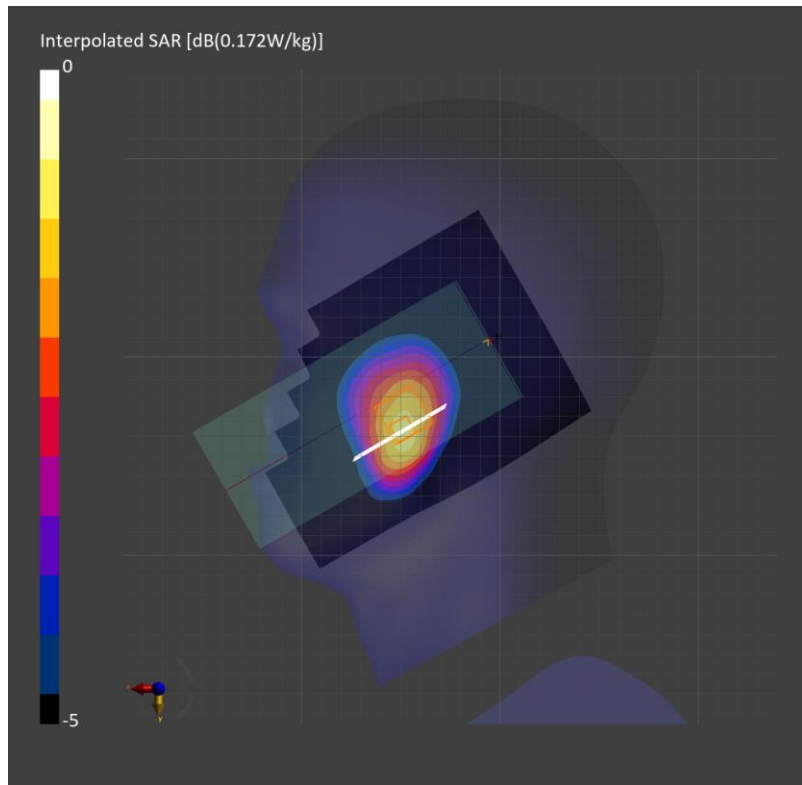

Measurement Report for SM-F956D, BACK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-1), Channel 190 (836.6 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	GSM 850	GSM, 10024-DAC	836.6	8.24	0.920	41.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.415	0.428
psSAR10g [W/Kg]	0.274	0.262
Power Drift [dB]	0.00	
M2/M1 [%]	84.3	
Dist 3dB Peak [mm]	13.5	

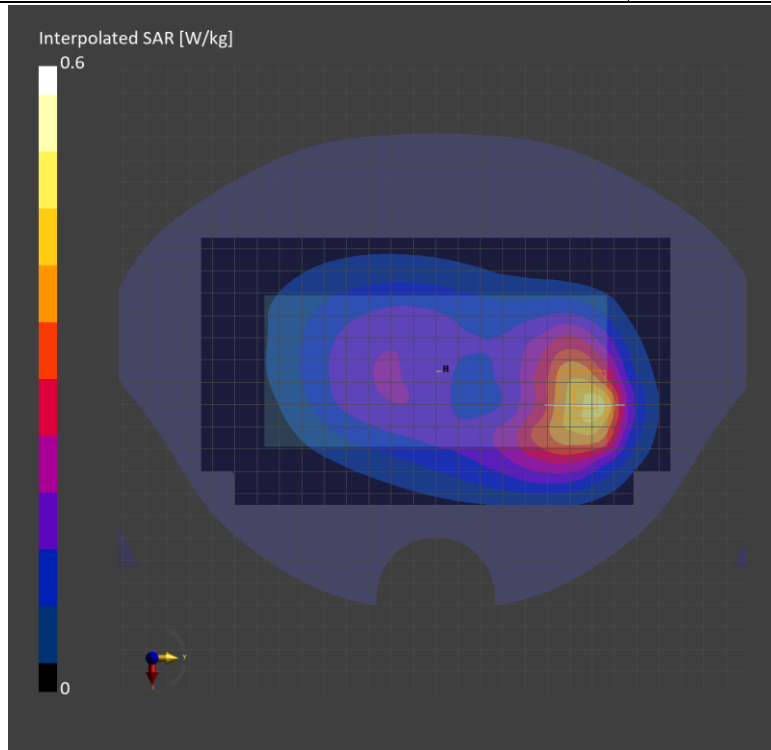

Measurement Report for SM-F956D, CHEEK, GSM 1900, GPRS-FDD (TDMA, GMSK, TN 0-1), Channel 1880000 (1880.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	GSM 1900	GSM, 10024-DAC	1880.0	7.56	1.42	39.6

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.046	0.048
psSAR10g [W/Kg]	0.029	0.035
Power Drift [dB]		-0.00
M2/M1 [%]		95.1
Dist 3dB Peak [mm]		14.3

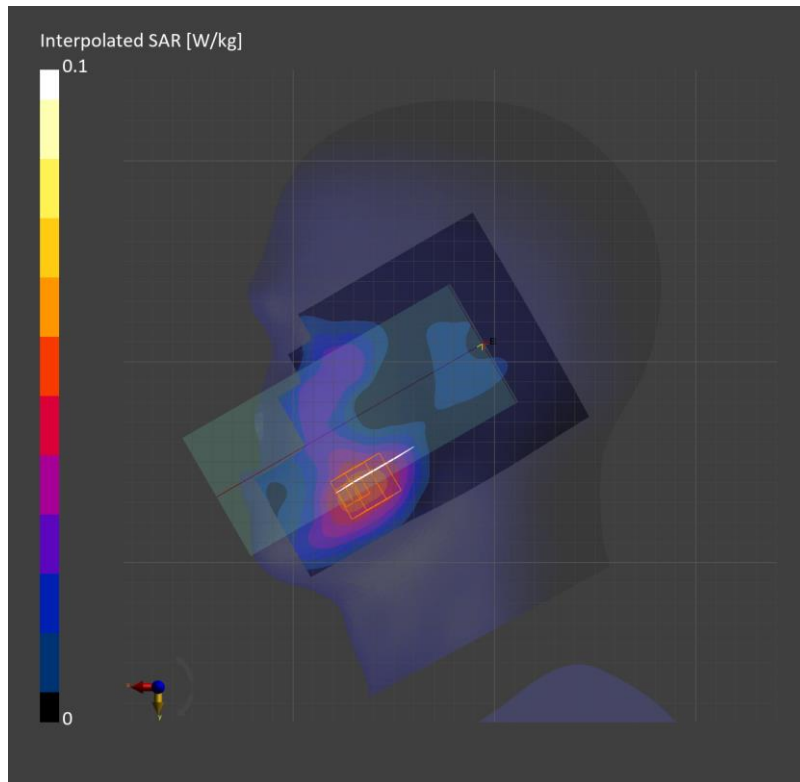

Measurement Report for Device, BACK, GSM 1900, GPRS-FDD (TDMA, GMSK, TN 0-1-2-3), Channel 1880000 (1880.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	GSM 1900	GSM, 10028-DAC	1880.0	7.56	1.42	39.6

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.480	0.532
psSAR10g [W/Kg]	0.265	0.296
Power Drift [dB]		-0.02
M2/M1 [%]		85.4
Dist 3dB Peak [mm]		9.9

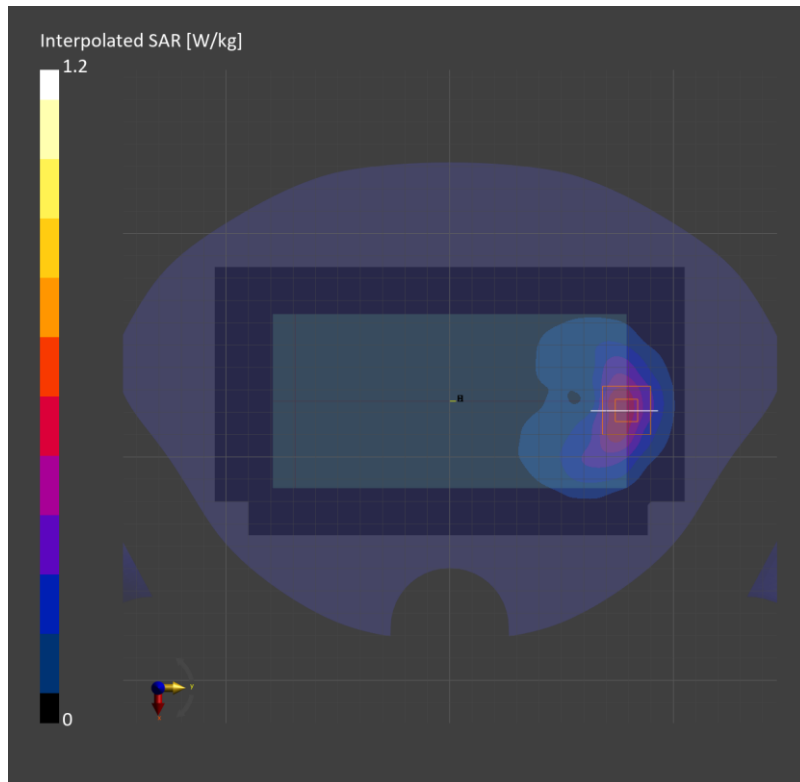

Measurement Report for Device, EDGE BOTTOM, GSM 1900, GPRS-FDD (TDMA, GMSK, TN 0-1-2-3), Channel 1880000 (1880.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	GSM 1900	GSM, 10028-DAC	1880.0	7.56	1.42	39.6

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.576	0.607
psSAR10g [W/Kg]	0.304	0.334
Power Drift [dB]	0.02	
M2/M1 [%]	84.6	
Dist 3dB Peak [mm]	10.8	

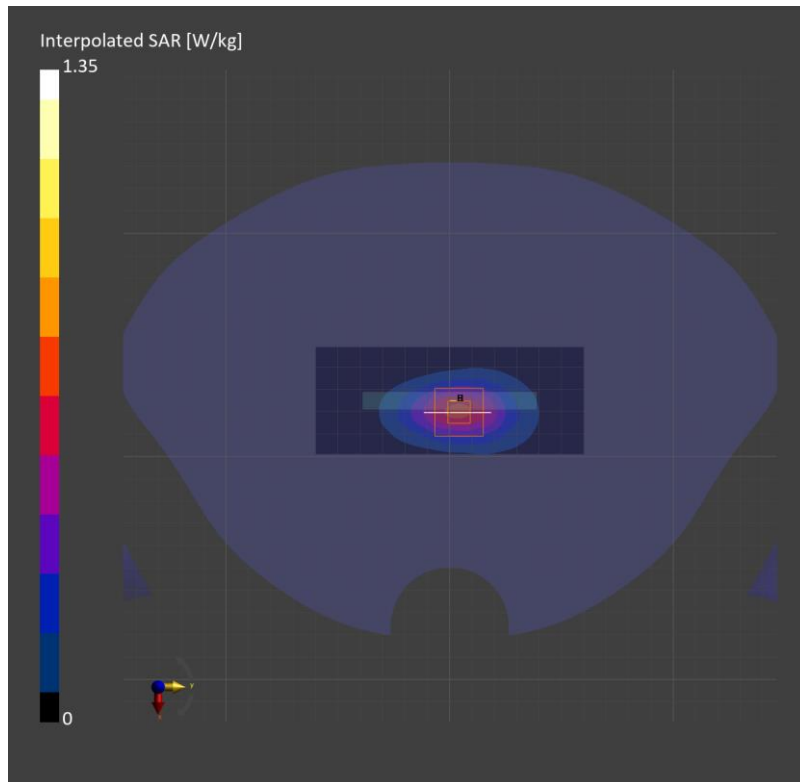

Measurement Report for SM-F956D, CHEEK, Band 5, UMTS-FDD (WCDMA), Channel 4183 (836.6 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 5	WCDMA, 10011-CAC	836.6	8.24	0.928	42.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.157	0.167
psSAR10g [W/Kg]	0.104	0.126
Power Drift [dB]		-0.06
M2/M1 [%]		87.5
Dist 3dB Peak [mm]		19.3

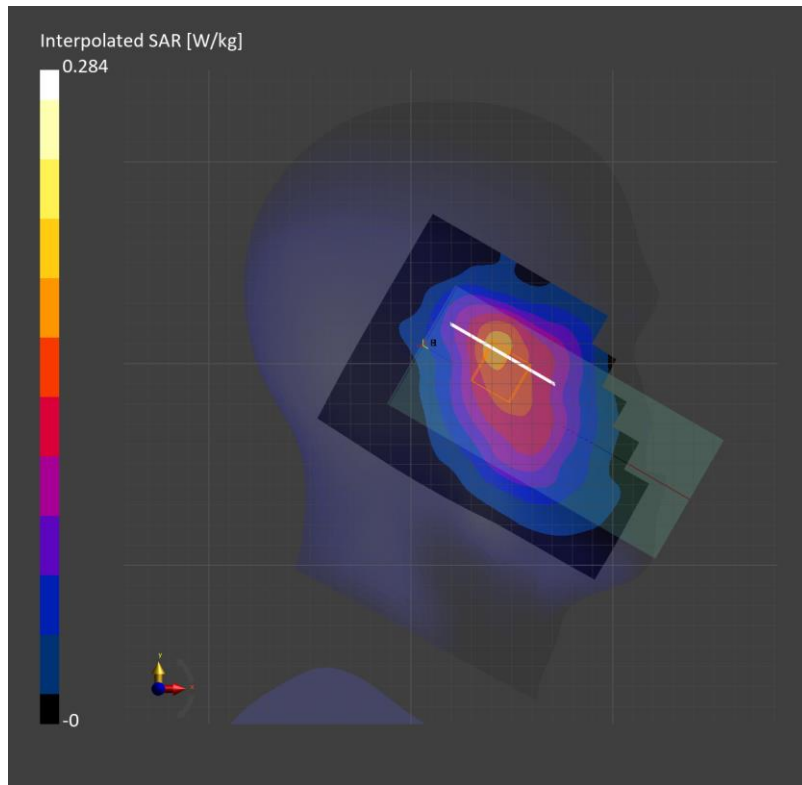

Measurement Report for SM-F956D, BACK, Band 5, UMTS-FDD (WCDMA), Channel 4183 (836.6 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 5	WCDMA, 10011-CAC	836.6	8.24	0.928	42.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.442	0.444
psSAR10g [W/Kg]	0.292	0.274
Power Drift [dB]	-0.03	
M2/M1 [%]	83.9	
Dist 3dB Peak [mm]	13.5	

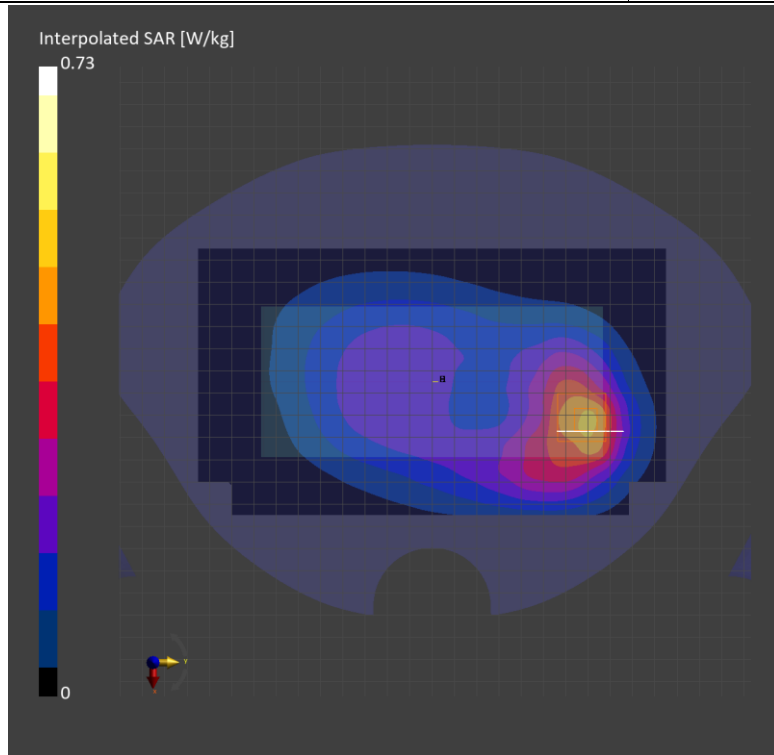

Measurement Report for SM-F956D, CHEEK, Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 20525 (836.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 5	LTE-FDD, 10175-CAH	836.5	8.24	0.928	42.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.182	0.196
psSAR10g [W/Kg]	0.125	0.154
Power Drift [dB]		-0.00
M2/M1 [%]		92.6
Dist 3dB Peak [mm]		20.8

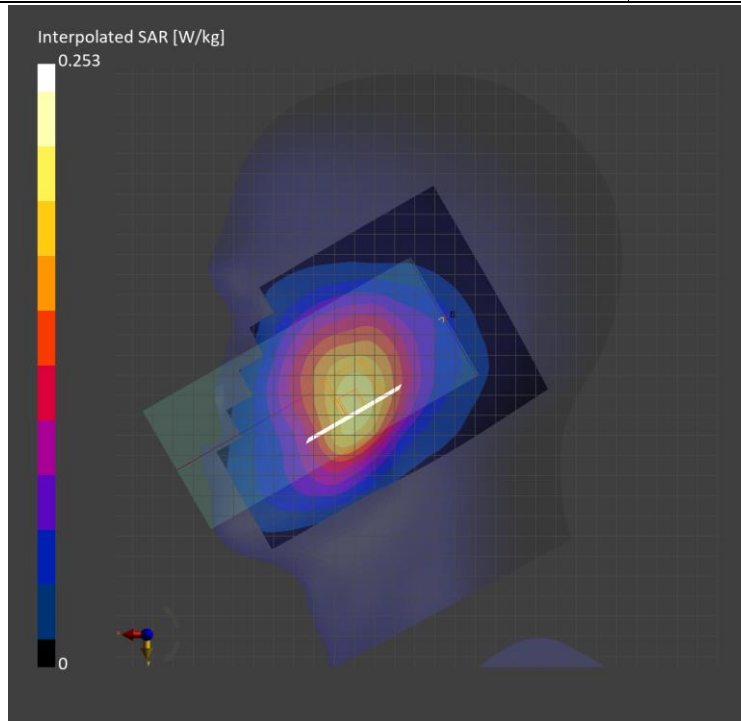



Measurement Report for SM-F956D, BACK, Band 5, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 20525 (836.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 5	LTE-FDD, 10175-CAH	836.5	8.24	0.928	42.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.429	0.433
psSAR10g [W/Kg]	0.281	0.264
Power Drift [dB]	-0.03	
M2 / M1 [%]	83.4	
Dist 3dB Peak [mm]	13.7	

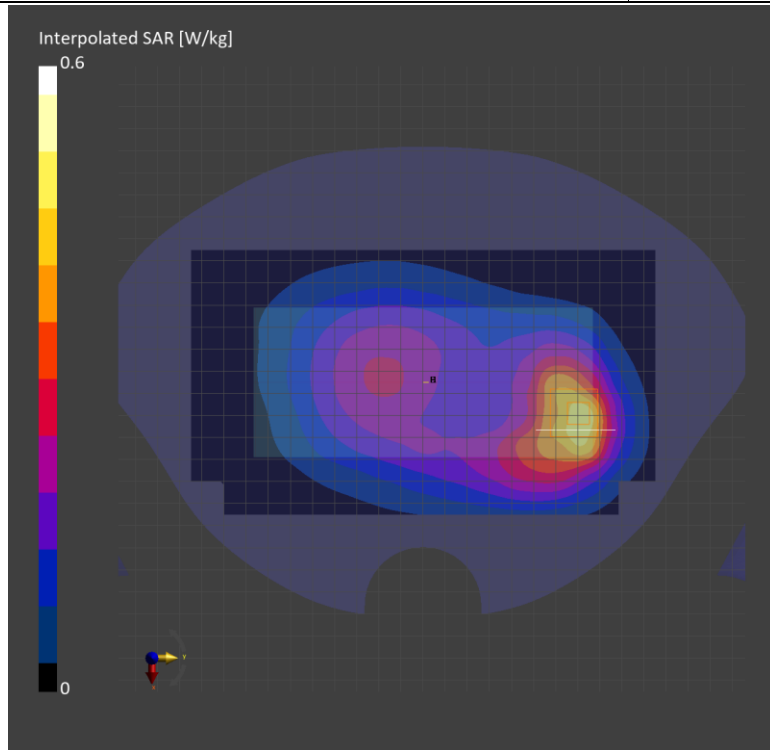

Measurement Report for SM-F956D, CHEEK, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23095 (707.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 12	LTE-FDD, 10175-CAH	707.5	9.17	0.888	43.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.161	0.181
psSAR10g [W/Kg]	0.113	0.137
Power Drift [dB]		-0.02
M2/M1 [%]		90.9
Dist 3dB Peak [mm]		22.9

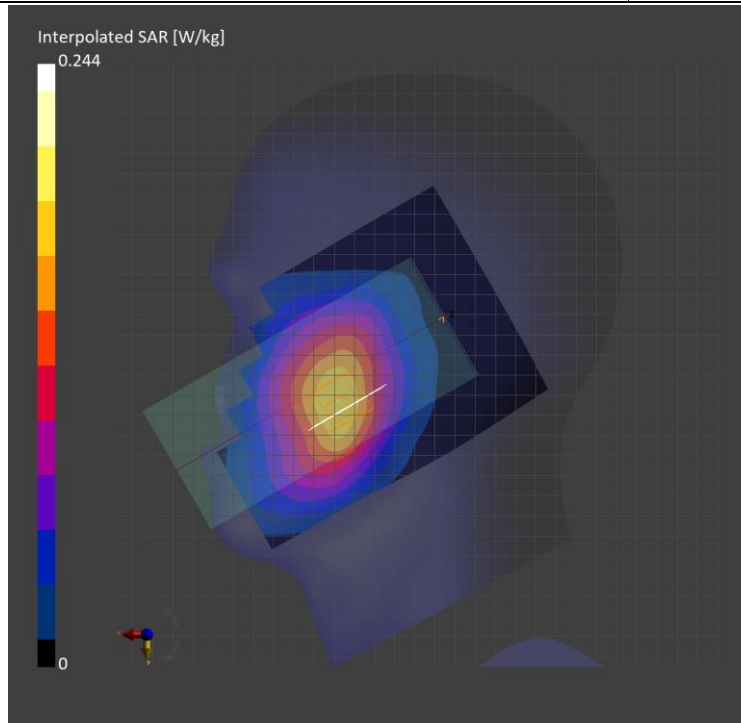

Measurement Report for SM-F956D, BACK, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23095 (707.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 12	LTE-FDD, 10175-CAH	707.5	9.17	0.888	43.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.333	0.310
psSAR10g [W/Kg]	0.217	0.185
Power Drift [dB]		-0.03
M2/M1 [%]		77.7
Dist 3dB Peak [mm]		11.4

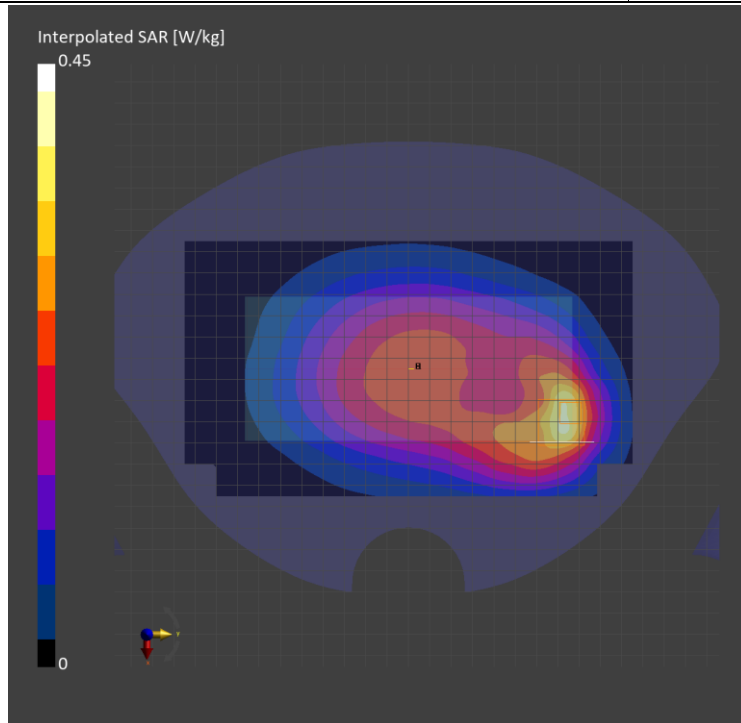

Measurement Report for SM-F956D, EDGE RIGHT, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23095 (707.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	Band 12	LTE-FDD, 10175-CAH	707.5	9.17	0.888	43.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	47.6 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	11.91 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.352	0.374
psSAR10g [W/Kg]	0.234	0.241
Power Drift [dB]		0.03
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		12.3

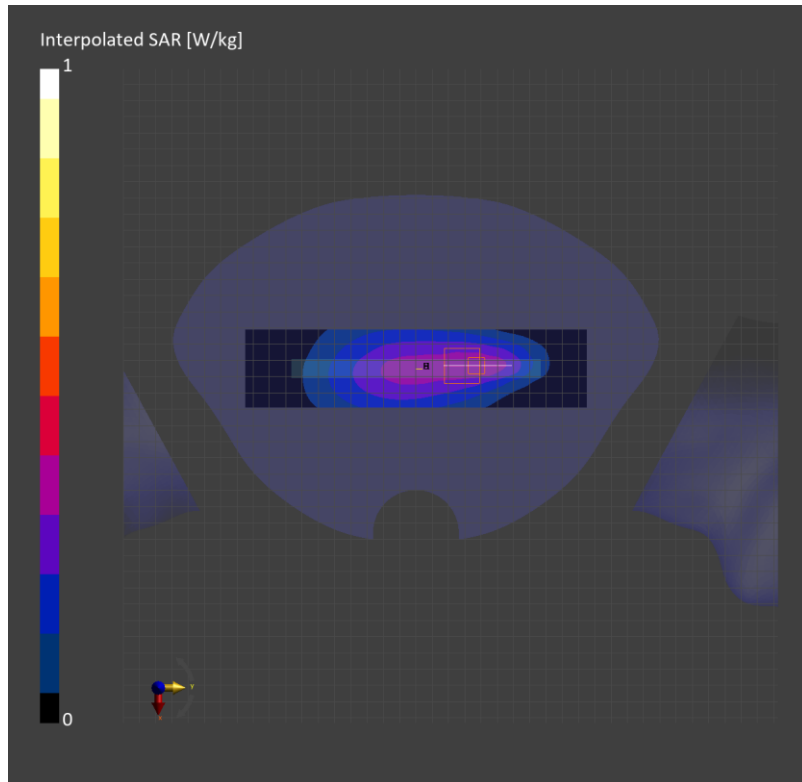

Measurement Report for SM-F956D, CHEEK, Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23230 (782.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 13	LTE-FDD, 10175-CAH	782.0	9.17	0.912	42.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.178	0.196
psSAR10g [W/Kg]	0.121	0.146
Power Drift [dB]	0.03	
M2/M1 [%]	90.5	
Dist 3dB Peak [mm]	16.0	

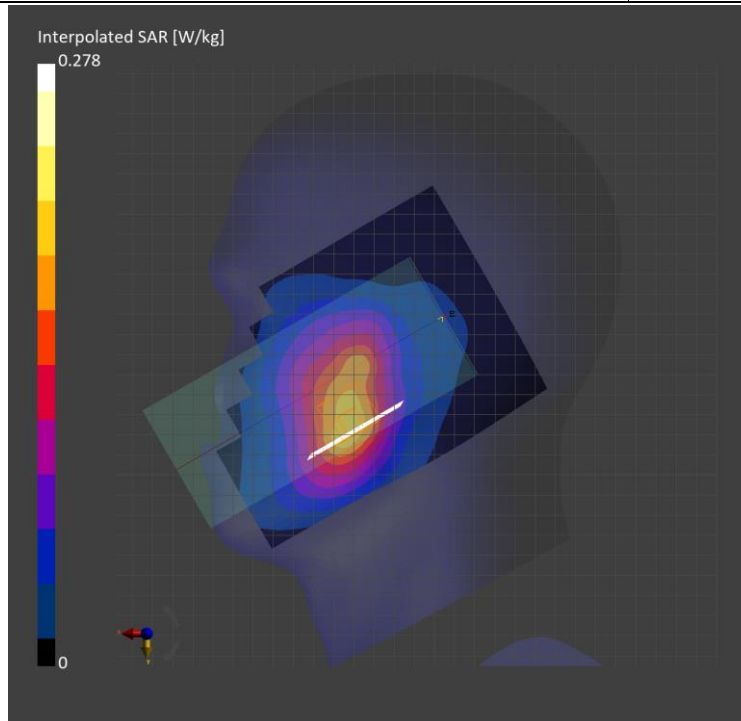

Measurement Report for SM-F956D, BACK, Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23230 (782.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 13	LTE-FDD, 10175-CAH	782.0	9.17	0.912	42.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.364	0.354
psSAR10g [W/Kg]	0.239	0.218
Power Drift [dB]		-0.03
M2/M1 [%]		82.9
Dist 3dB Peak [mm]		14.0

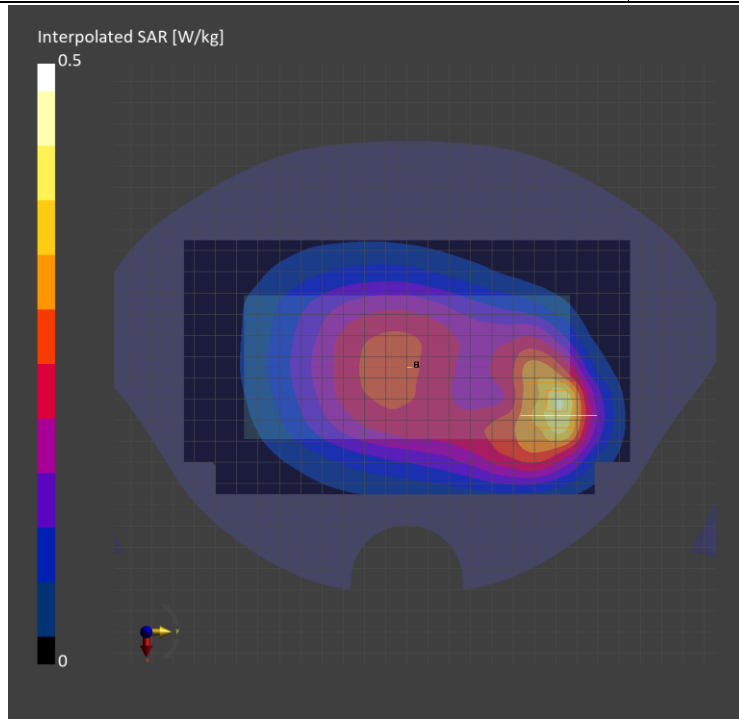

Measurement Report for SM-F956D, EDGE RIGHT, Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK), Channel 23230 (782.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	Band 13	LTE-FDD, 10175-CAH	782.0	9.17	0.912	42.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	47.6 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	11.91 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.445	0.454
psSAR10g [W/Kg]	0.302	0.318
Power Drift [dB]		0.03
M2/M1 [%]		88.9
Dist 3dB Peak [mm]		> 15.0

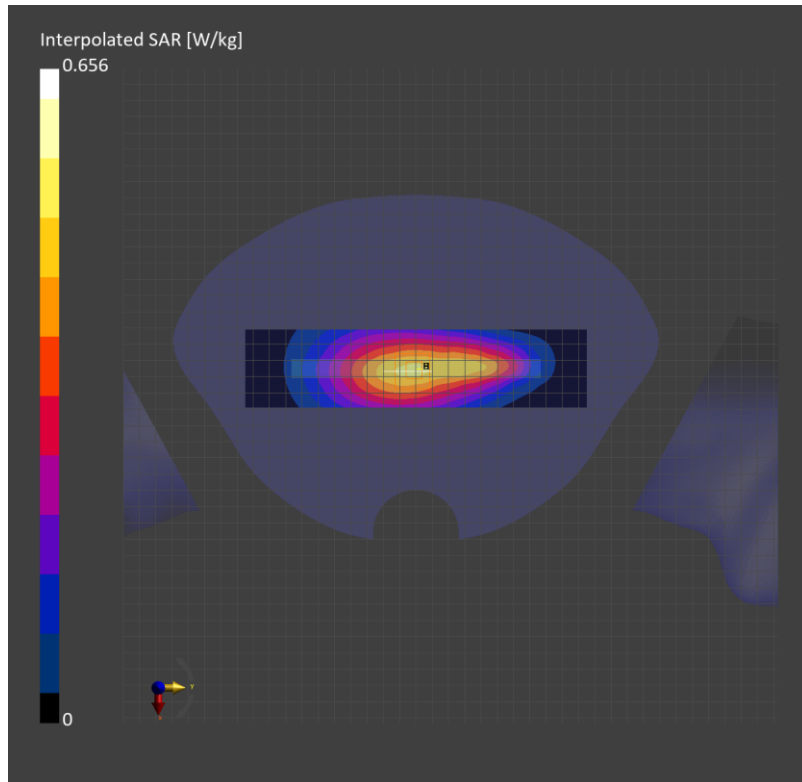

Measurement Report for SM-F956D, CHEEK, Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK), Channel 18700 (1860.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 2	LTE-FDD, 10169-CAF	1860.0	7.43	1.39	41.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.134	0.132
psSAR10g [W/Kg]	0.074	0.085
Power Drift [dB]	0.00	
M2/M1 [%]	89.6	
Dist 3dB Peak [mm]	11.6	

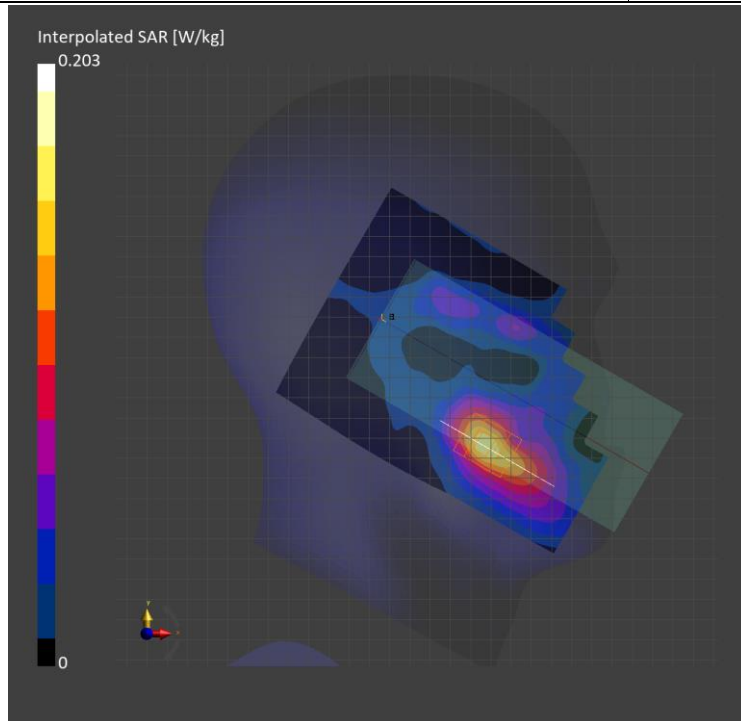



Measurement Report for SM-F956D, BACK, Band 2, LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK) , Channel 18700 (1860.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 2	LTE-FDD, 10100-CAF	1860.0	7.43	1.39	41.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.758	0.833
psSAR10g [W/Kg]	0.405	0.444
Power Drift [dB]	0.03	
M2/M1 [%]	80.5	
Dist 3dB Peak [mm]	9.7	

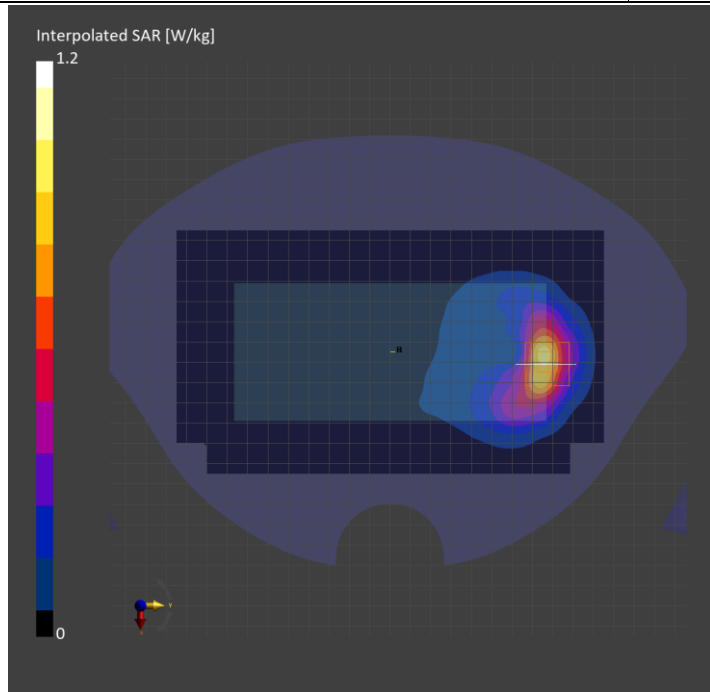

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 2	LTE-FDD, 10169-CAF	1860.0	7.56	1.41	39.7

**Hardware Setup**


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.802	0.955
psSAR10g [W/Kg]	0.319	0.529
Power Drift [dB]		0.01
M2/M1 [%]		84.1
Dist 3dB Peak [mm]		10.3

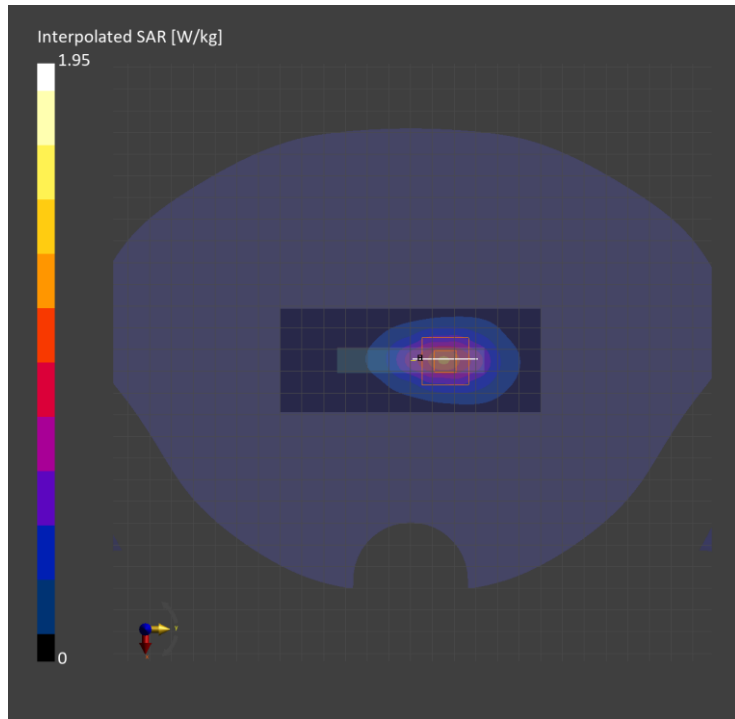

Measurement Report for SM\_F956D, CHEEK, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9), Channel 41055 (2636.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 41	LTE-TDD, 10435-AAG	2636.5	7.68	1.93	38.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.085	0.082
psSAR10g [W/Kg]	0.043	0.041
Power Drift [dB]		0.12
M2/M1 [%]		62.0
Dist 3dB Peak [mm]		5.9

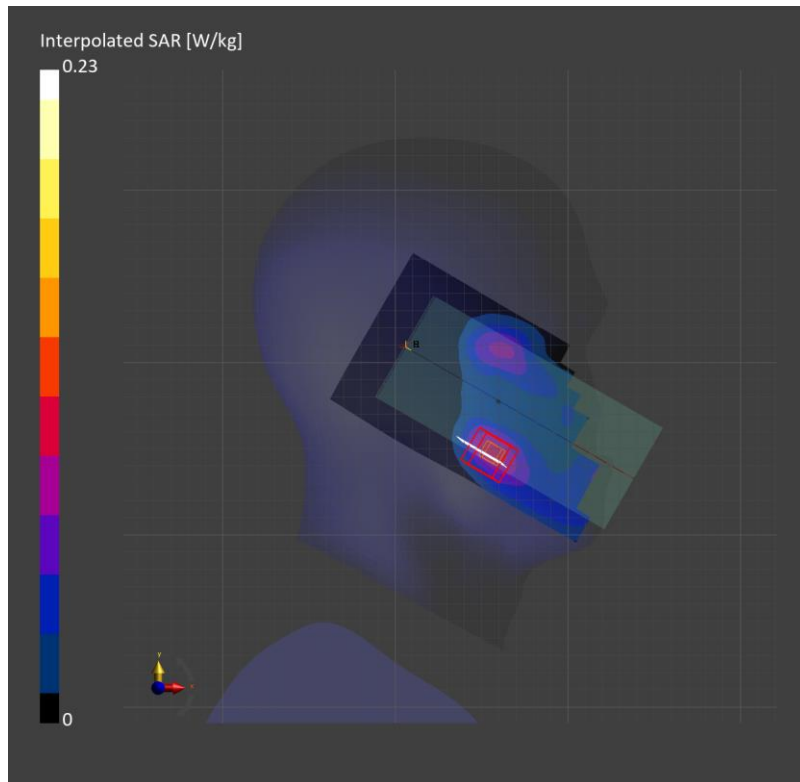

Measurement Report for SM\_F956D, BACK, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) , Channel 39750 (2506.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 41	LTE-TDD, 10494-AAG	2506.0	7.68	1.82	37.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.392	0.415
psSAR10g [W/Kg]	0.187	0.209
Power Drift [dB]	-0.04	
M2 / M1 [%]	81.1	
Dist 3dB Peak [mm]	9.9	

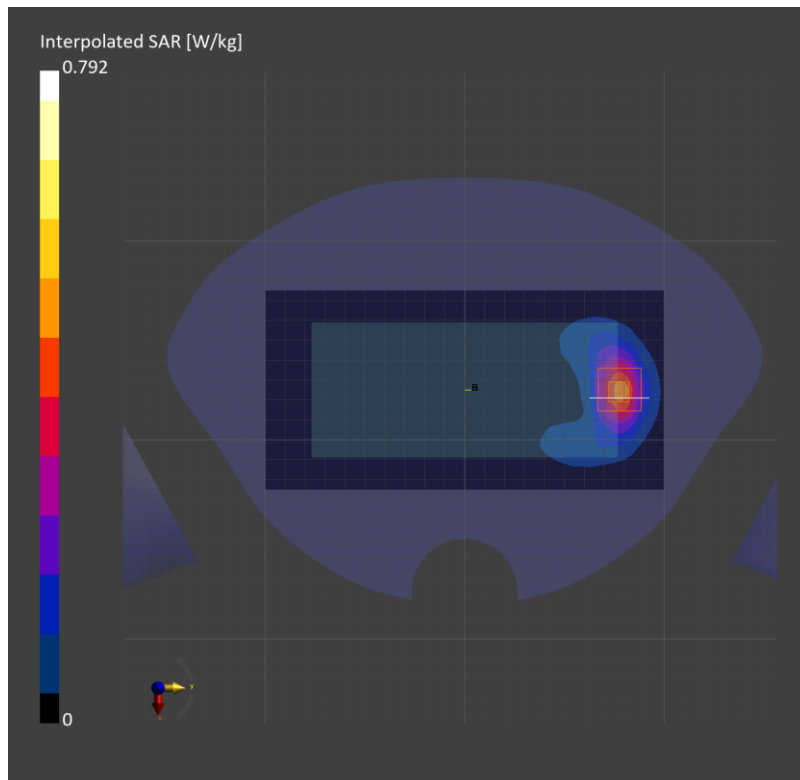

Measurement Report for SM\_F956D, EDGE BOTTOM, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9), Channel 41055 (2636.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 41	LTE-TDD, 10494-AAG	2636.5	7.68	1.93	37.6

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	1.04	1.08
psSAR10g [W/Kg]	0.493	0.546
Power Drift [dB]	0.02	
M2/M1 [%]	84.5	
Dist 3dB Peak [mm]	10.8	

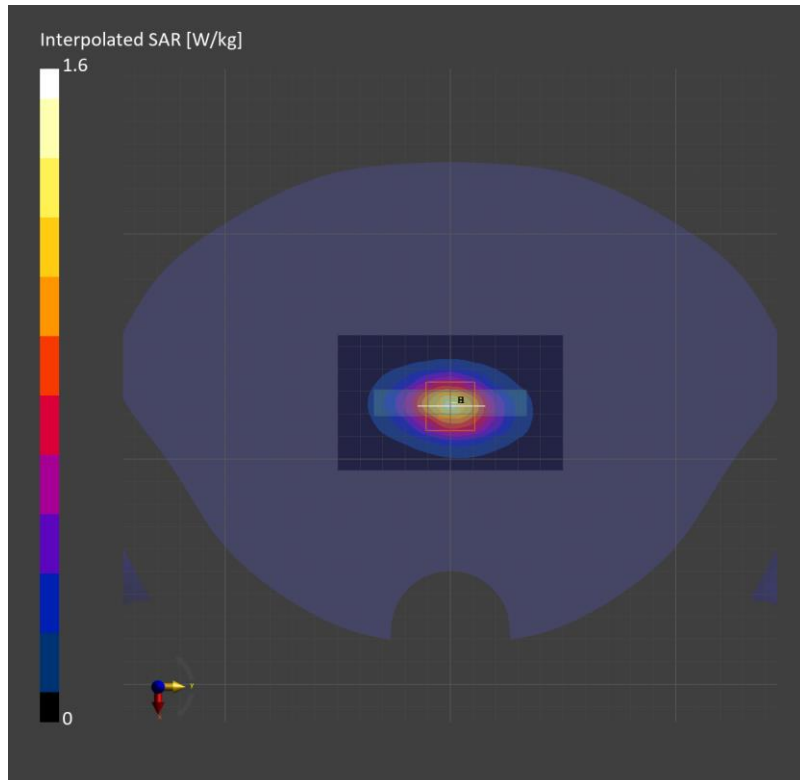

Measurement Report for SM\_F956D, EDGE BOTTOM, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) , Channel 41055 (2636.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 0.00	Band 41	LTE-TDD, 10494-AAG	2636.5	7.68	1.93	38.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	4.8 x 4.8 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	5.64	6.13
psSAR10g [W/Kg]	2.55	2.69
Power Drift [dB]		-0.08
M2/M1 [%]		65.8
Dist 3dB Peak [mm]		7.4

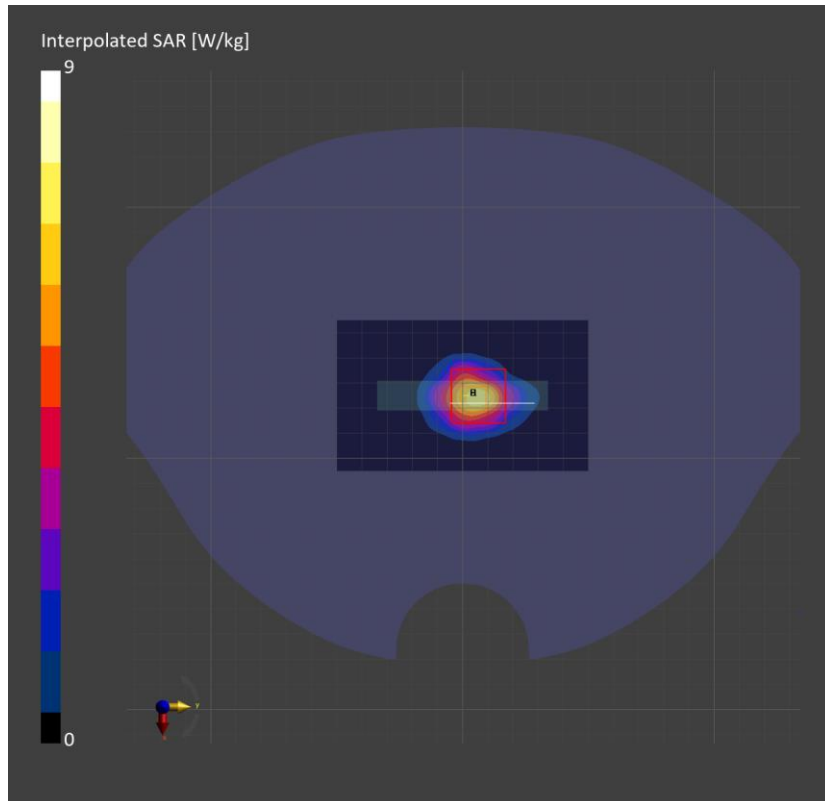

Measurement Report for SM\_F956D, TILT, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9), Channel 41490 (2680.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Band 41	LTE-TDD, 10435-AAG	2680.0	7.68	1.96	38.4

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.782	0.815
psSAR10g [W/Kg]	0.349	0.397
Power Drift [dB]		0.03
M2/M1 [%]		82.6
Dist 3dB Peak [mm]		8.1

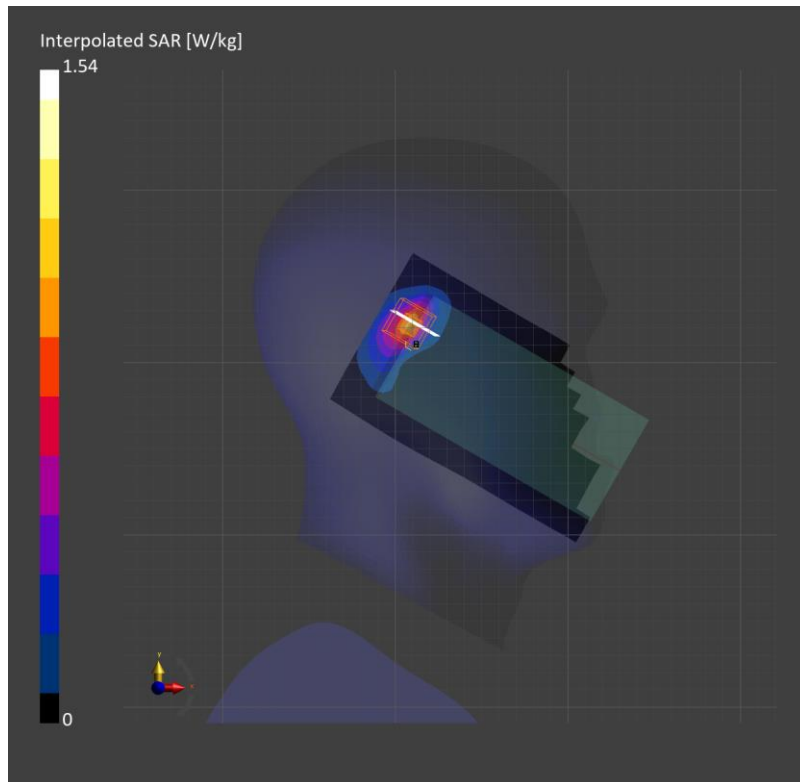

Measurement Report for SM\_F956D, BACK, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9), Channel 41055 (2636.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 41	LTE-TDD, 10435-AAG	2636.5	7.68	1.93	38.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.358	0.380
psSAR10g [W/Kg]	0.171	0.190
Power Drift [dB]		-0.16
M2/M1 [%]		77.7
Dist 3dB Peak [mm]		9.9

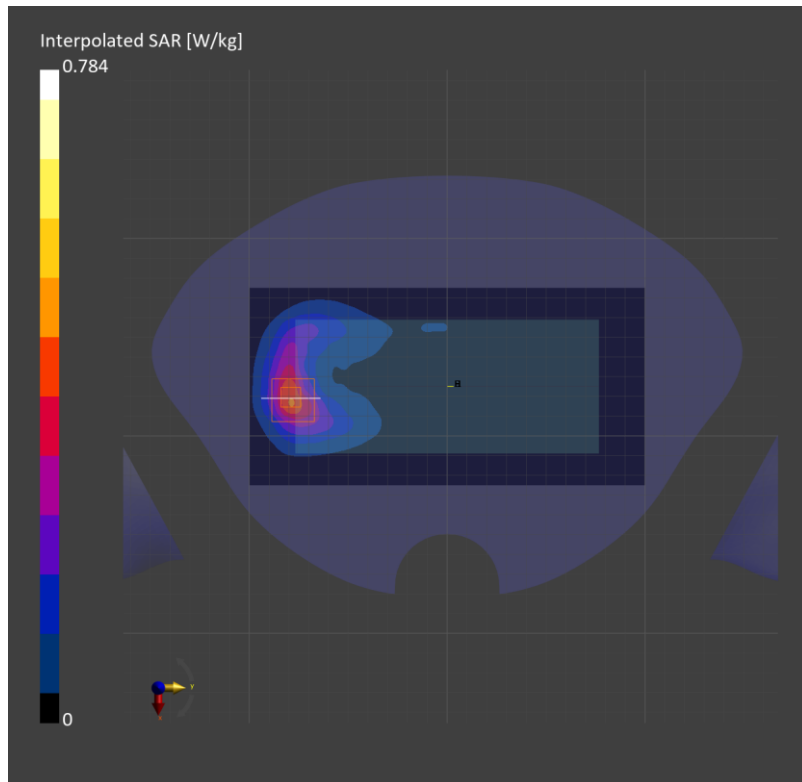



Measurement Report for SM\_F956D, EDGE TOP, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9), Channel 41490 (2680.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band 41	LTE-TDD, 10494-AAG	2680.0	7.68	1.96	38.4

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2043	HBBL-600-10000	EX3DV4 - SN7376, 2023-07-25	DAE4 Sn1343, 2023-06-30

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.491	0.532
psSAR10g [W/Kg]	0.235	0.256
Power Drift [dB]		-0.06
M2/M1 [%]		79.6
Dist 3dB Peak [mm]		8.0

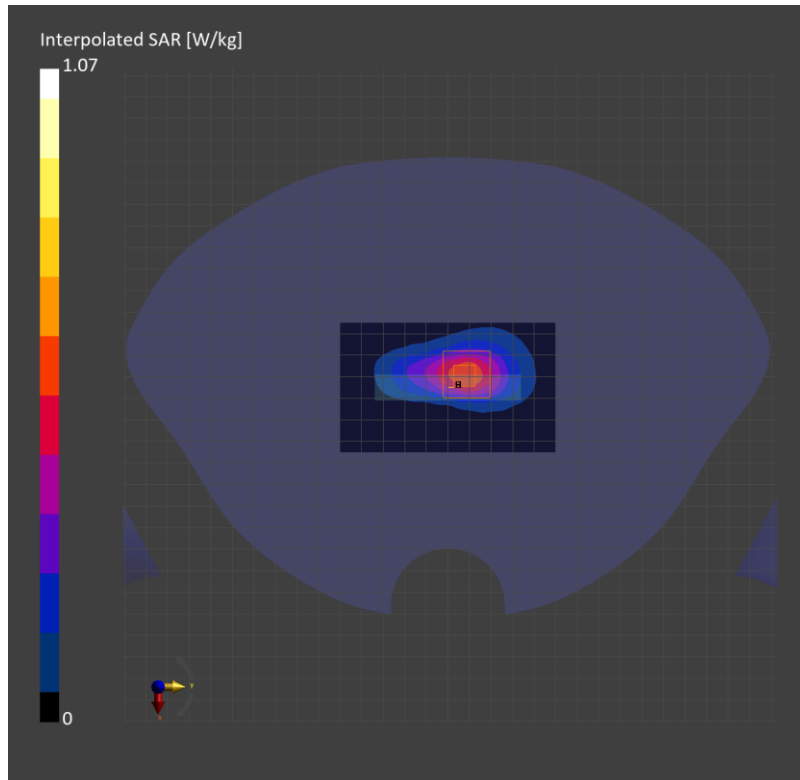

Measurement Report for SM-F956D, CHEEK, Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK), Channel 132072 (1720.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 66	LTE-FDD, 10169-CAF	1720.0	7.68	1.31	39.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.066	0.099
psSAR10g [W/Kg]	0.037	0.060
Power Drift [dB]		0.04
M2/M1 [%]		69.7
Dist 3dB Peak [mm]		8.5

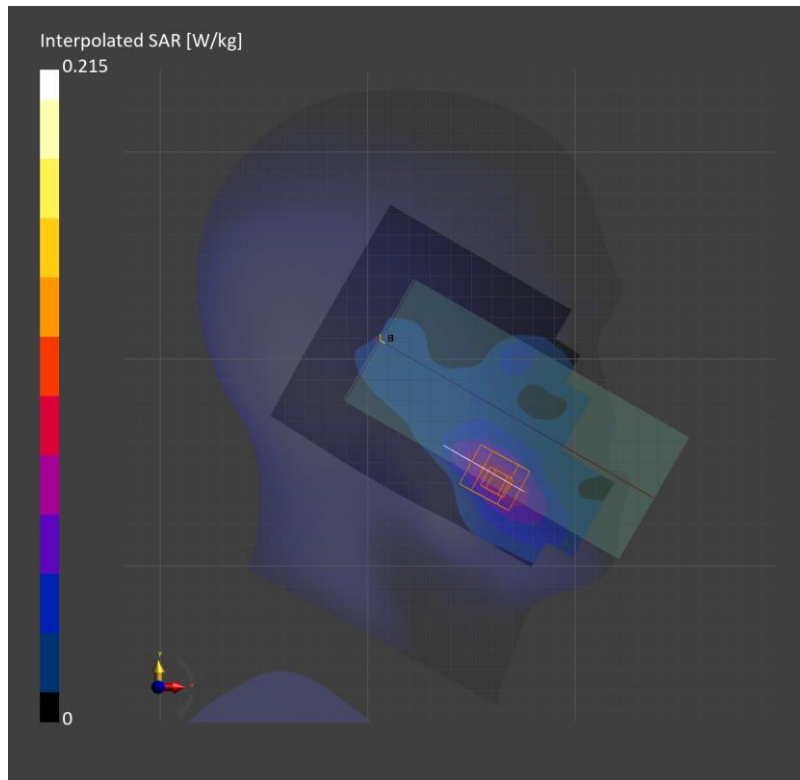

Measurement Report for SM-F956D, BACK, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK), Channel 132072 (1720.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 66	LTE-FDD, 10297-AAE	1720.0	7.9	1.31	41.2

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.462	0.516
psSAR10g [W/Kg]	0.258	0.284
Power Drift [dB]	-0.02	
M2/M1 [%]	84.5	
Dist 3dB Peak [mm]	9.7	

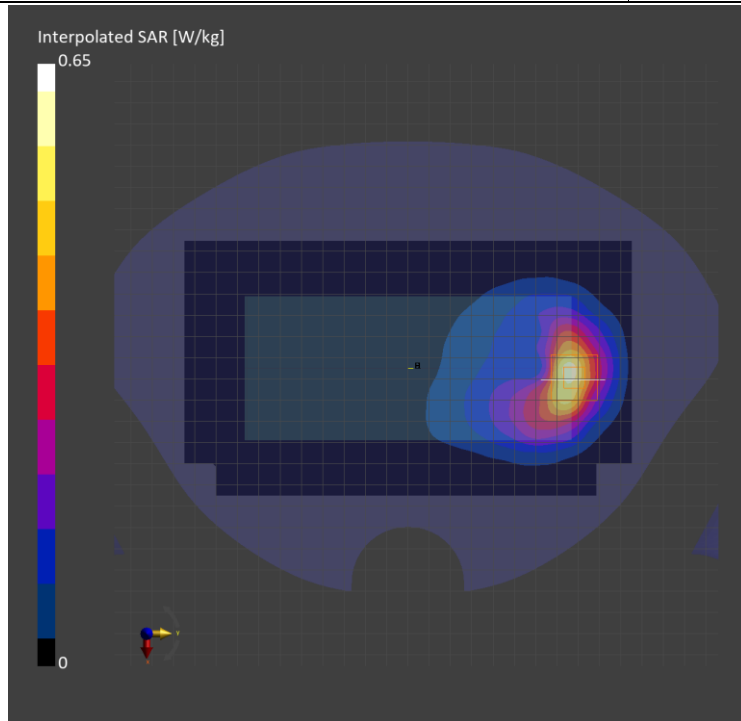

Measurement Report for SM-F956D, EDGE BOTTOM, Band 66, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK), Channel 132072 (1720.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 66	LTE-FDD, 10169-CAF	1720.0	7.68	1.31	39.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	47.6 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	11.91 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.484	0.516
psSAR10g [W/Kg]	0.262	0.295
Power Drift [dB]	0.03	
M2/M1 [%]	84.8	
Dist 3dB Peak [mm]	10.8	

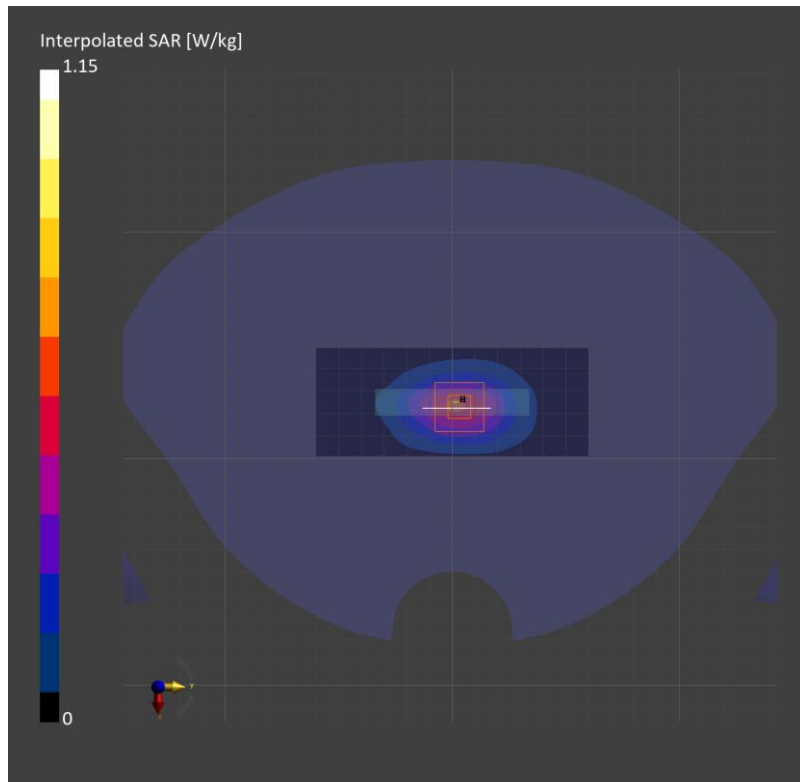

Measurement Report for SM-F956D, CHEEK, Band n5, 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz), Channel 167300 (836.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n5	5G NR FR1 FDD, 10939-AAC	836.5	8.24	0.907	43.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.143	0.155
psSAR10g [W/Kg]	0.099	0.119
Power Drift [dB]		-0.04
M2/M1 [%]		93.0
Dist 3dB Peak [mm]		19.2

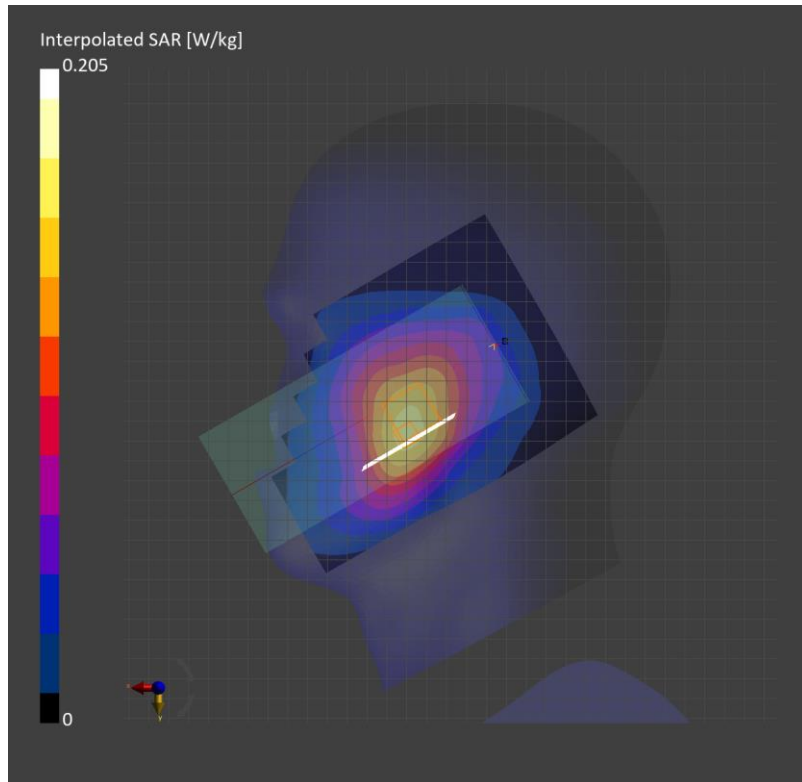

Measurement Report for SM-F956D, BACK, Band n5, 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz), Channel 167300 (836.5 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n5	5G NR FR1 FDD, 10939-AAC	836.5	8.24	0.920	41.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 1991	HBBL-600-10000	EX3DV4 - SN7313, 2024-02-21	DAE4 Sn1447, 2024-03-13

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.385	0.389
psSAR10g [W/Kg]	0.249	0.243
Power Drift [dB]	-0.03	
M2/M1 [%]	84.4	
Dist 3dB Peak [mm]	13.5	

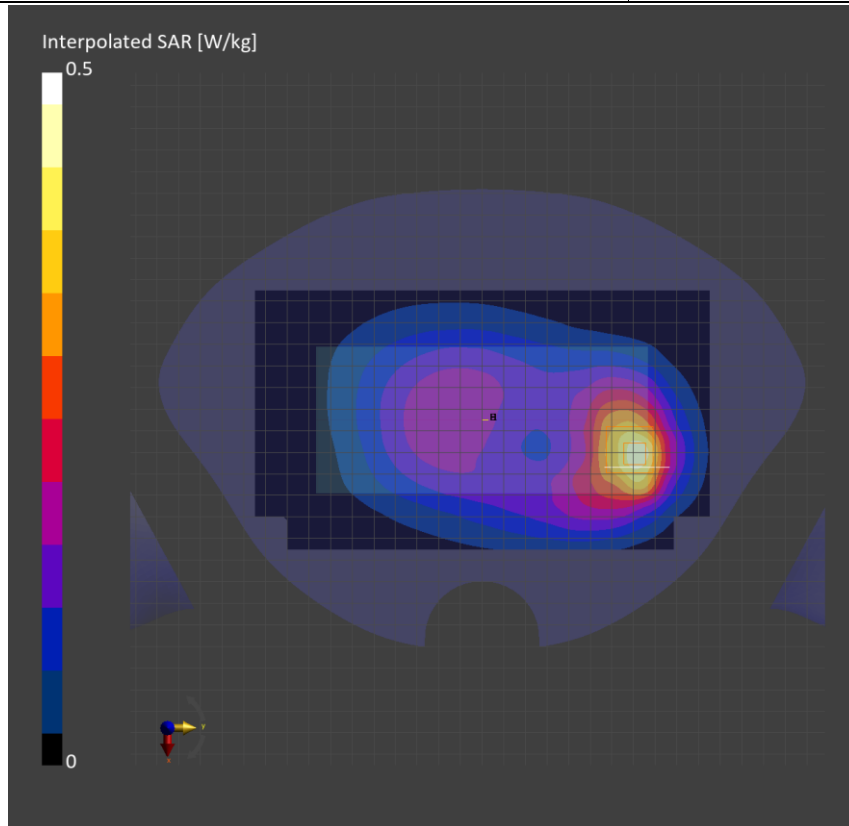

Measurement Report for SM-F956D, CHEEK, Band n66, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz), Channel 349000 (1745.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n66	5G NR FR1 FDD, 10942-AAC	1745.0	7.68	1.36	40.2

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.133	0.150
psSAR10g [W/Kg]	0.070	0.080
Power Drift [dB]		0.06
M2/M1 [%]		81.2
Dist 3dB Peak [mm]		10.3

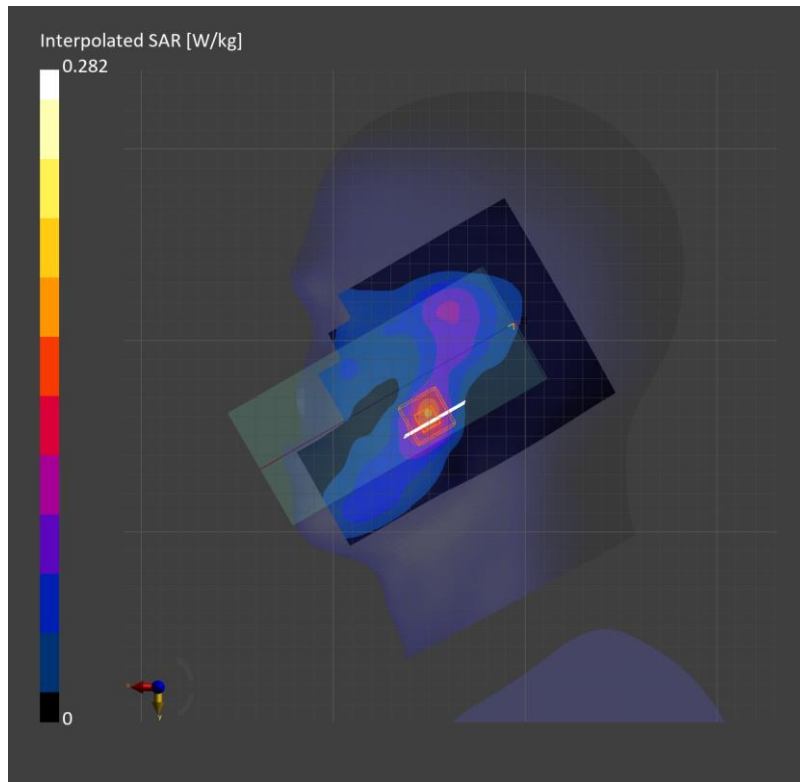

Measurement Report for SM-F956D, BACK, Band n66, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz), Channel 349000 (1745.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n66	5G NR FR1 FDD, 10942-AAC	1745.0	7.68	1.33	39.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.675	0.736
psSAR10g [W/Kg]	0.365	0.394
Power Drift [dB]	-0.02	
M2/M1 [%]	82.4	
Dist 3dB Peak [mm]	9.6	

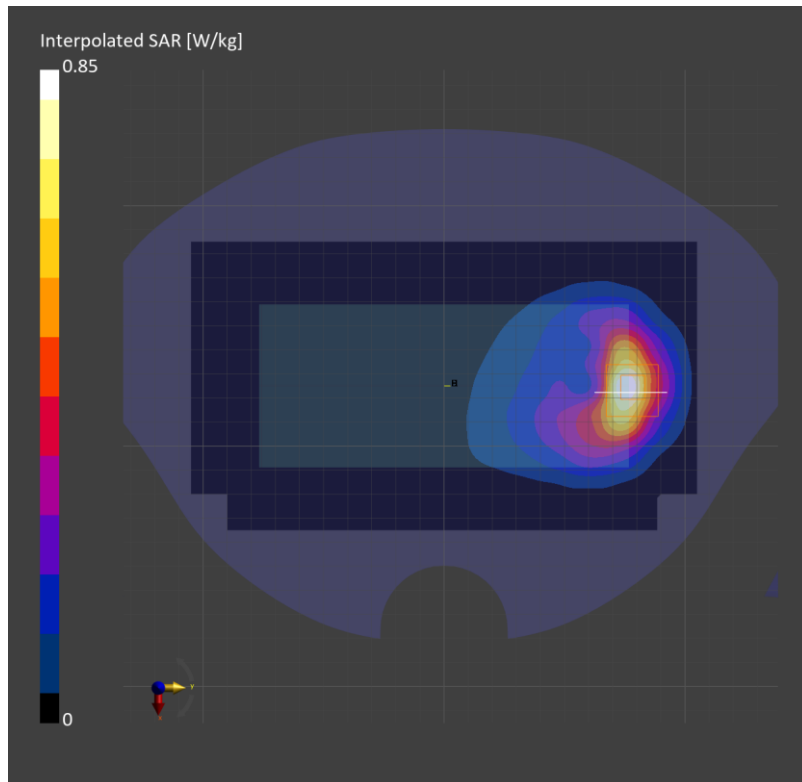



## NR Band 41 Upper


Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:1  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 37.712$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Left Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**LHS/Tilt QPSK 135/69 ch.518598/Area Scan (9x18x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 1.21 W/kg

**LHS/Tilt QPSK 135/69 ch.518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 24.56 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 1.61 W/kg  
**SAR(1 g) = 0.719 W/kg; SAR(10 g) = 0.327 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 9 mm  
 Ratio of SAR at M2 to SAR at M1 = 43.9%  
 Maximum value of SAR (measured) = 1.24 W/kg

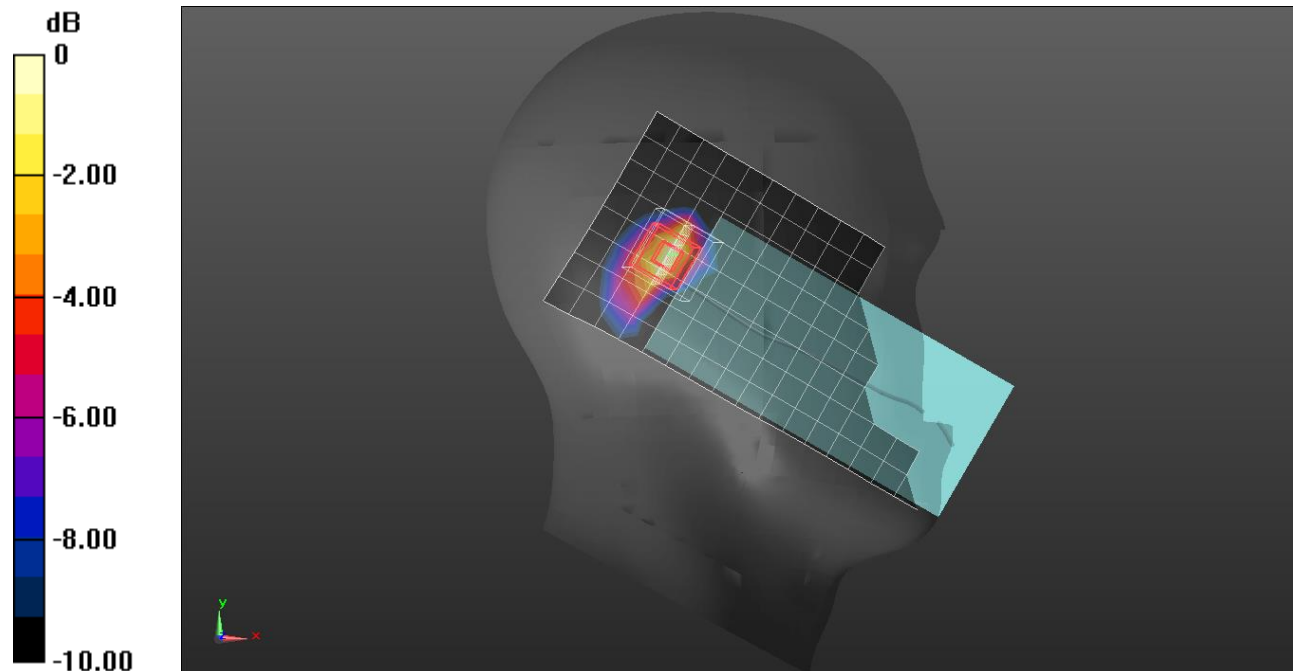

0 dB = 1.24 W/kg = 0.93 dBW/kg

## NR Band n41 Upper


Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:4.00037  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.946$  S/m;  $\epsilon_r = 37.526$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Rear/QPSK RB 135/69 ch.518598 10mm/Area Scan (9x17x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.613 W/kg

**Rear/QPSK RB 135/69 ch.518598 10mm/Zoom Scan 2 2 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 16.88 V/m; Power Drift = 0.02 dB  
 Peak SAR (extrapolated) = 0.786 W/kg  
**SAR(1 g) = 0.384 W/kg; SAR(10 g) = 0.183 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 9.8 mm  
 Ratio of SAR at M2 to SAR at M1 = 49.2%  
 Maximum value of SAR (measured) = 0.630 W/kg

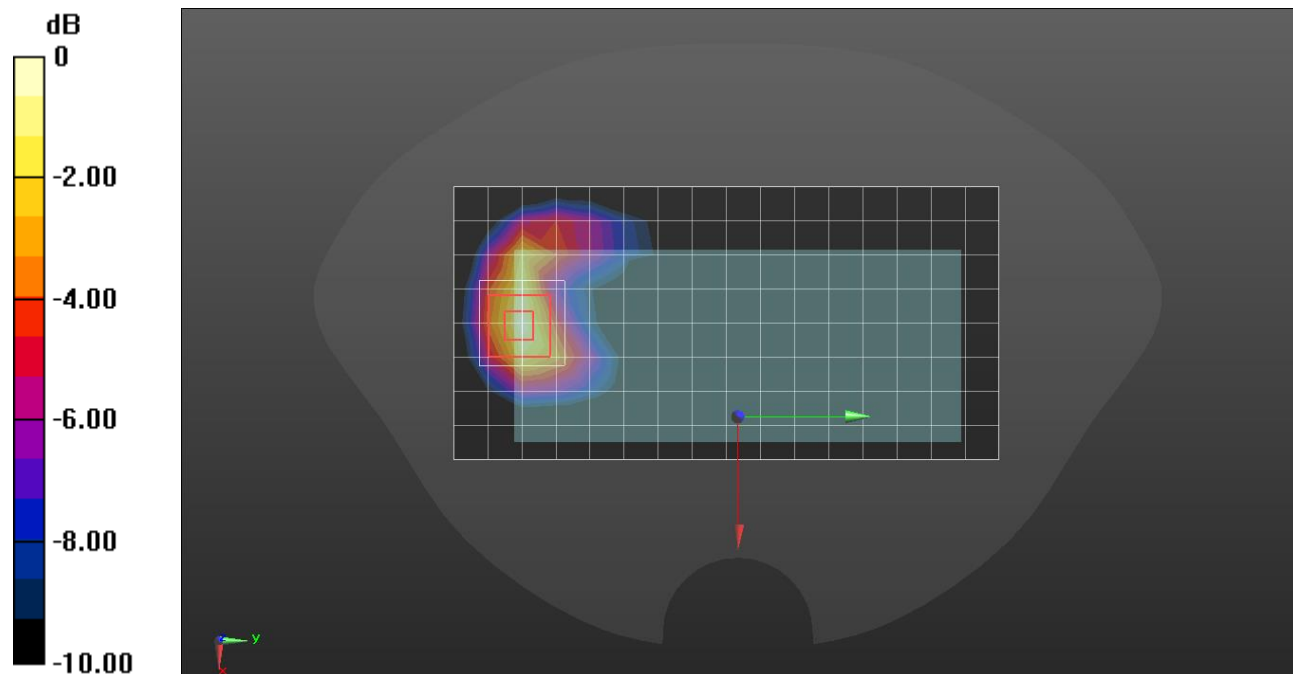

0 dB = 0.630 W/kg = -2.01 dBW/kg

## NR Band n41 Upper


Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:4.00037  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 37.712$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Top/QPSK RB 1/1 ch.518598/Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.598 W/kg

**Top/QPSK RB 1/1 ch.518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 18.57 V/m; Power Drift = 0.17 dB  
 Peak SAR (extrapolated) = 0.969 W/kg  
**SAR(1 g) = 0.464 W/kg; SAR(10 g) = 0.217 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 8.5 mm  
 Ratio of SAR at M2 to SAR at M1 = 47.8%  
 Maximum value of SAR (measured) = 0.781 W/kg

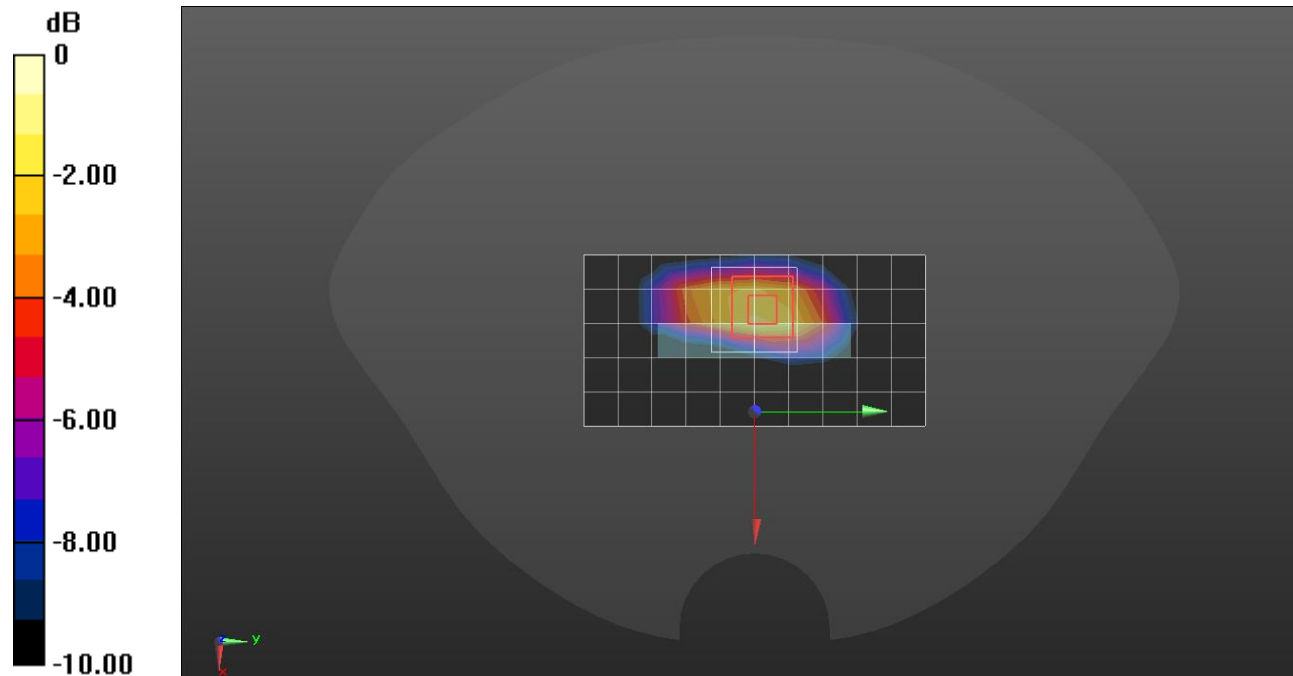

0 dB = 0.781 W/kg = -1.07 dBW/kg

# NR Band 41

Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:1  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 37.712$ ;  $\rho = 1000$  kg/m<sup>3</sup>


### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Right Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**RHS/Touch QPSK 1/1 ch.518598/Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.129 W/kg

**RHS/Touch QPSK 1/1 ch.518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.006 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.190 W/kg  
**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.037 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 7.6 mm  
 Ratio of SAR at M2 to SAR at M1 = 44.7%  
 Maximum value of SAR (measured) = 0.152 W/kg

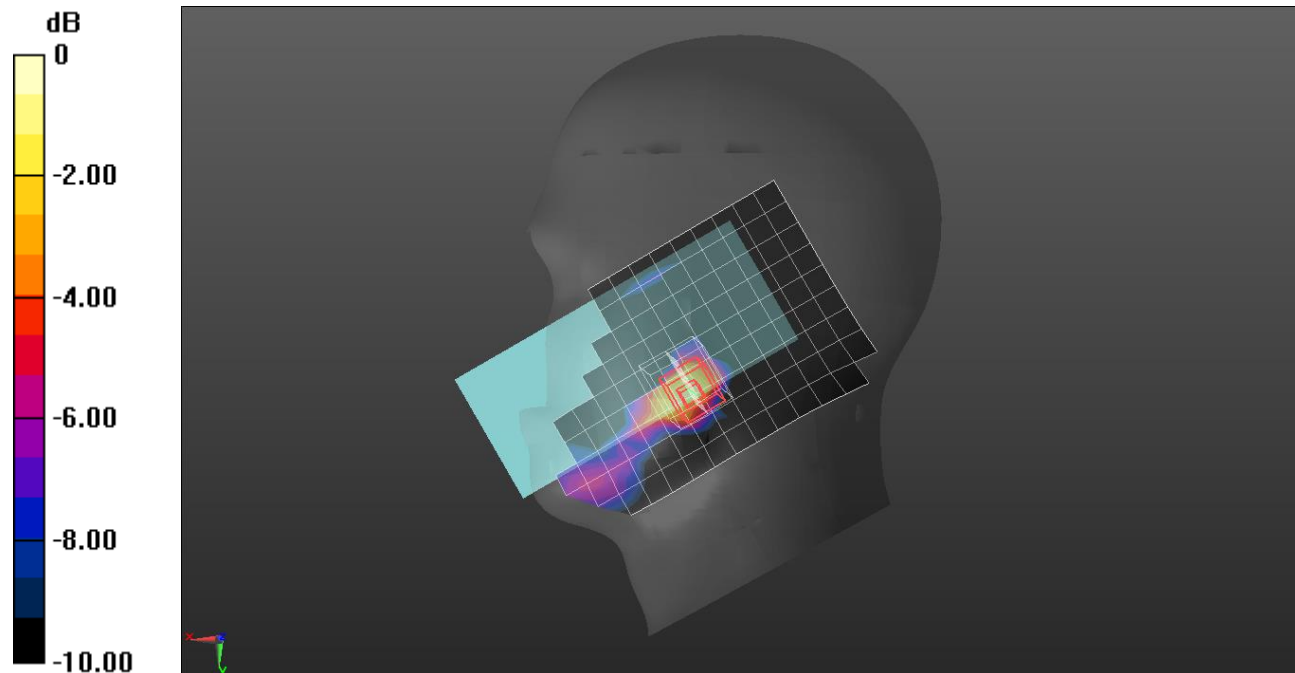

0 dB = 0.152 W/kg = -8.18 dBW/kg

# NR Band n41


Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:4.00037  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 37.712$ ;  $\rho = 1000$  kg/m<sup>3</sup>

## DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Rear/QPSK RB 135/69 ch.518598/Area Scan (9x18x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.795 W/kg

**Rear/QPSK RB 135/69 ch.518598/Zoom Scan 2 2 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 19.64 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.06 W/kg  
**SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.221 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 8.5 mm  
 Ratio of SAR at M2 to SAR at M1 = 46.7%  
 Maximum value of SAR (measured) = 0.839 W/kg

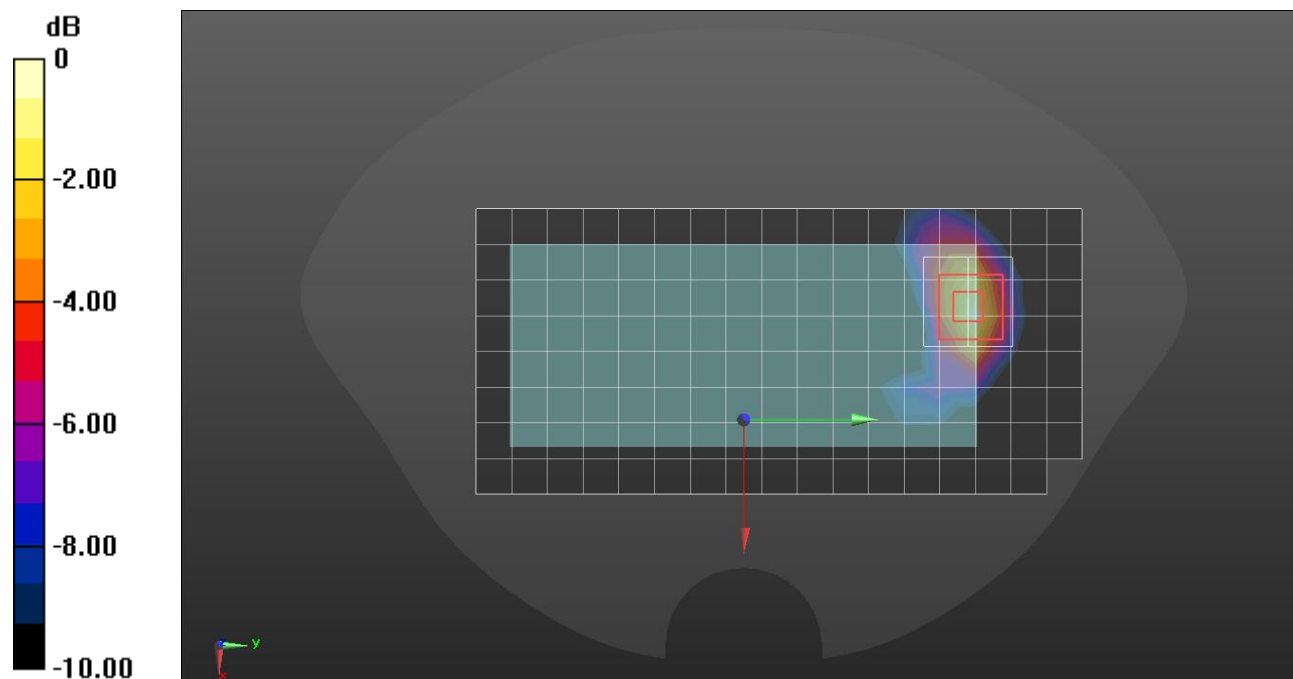

0 dB = 0.839 W/kg = -0.76 dBW/kg

## NR Band n41


Frequency: 2592.99 MHz; Communication System Channel Number: 518598; Duty Cycle: 1:4.00037  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2592.99$  MHz;  $\sigma = 1.911$  S/m;  $\epsilon_r = 37.712$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.36, 7.64, 6.91) @ 2592.99 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Bottom/QPSK RB 135/69 ch.518598/Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 1.32 W/kg

**Bottom/QPSK RB 135/69 ch.518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 24.43 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 1.66 W/kg  
**SAR(1 g) = 0.775 W/kg; SAR(10 g) = 0.340 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 8.5 mm  
 Ratio of SAR at M2 to SAR at M1 = 47.3%  
 Maximum value of SAR (measured) = 1.31 W/kg

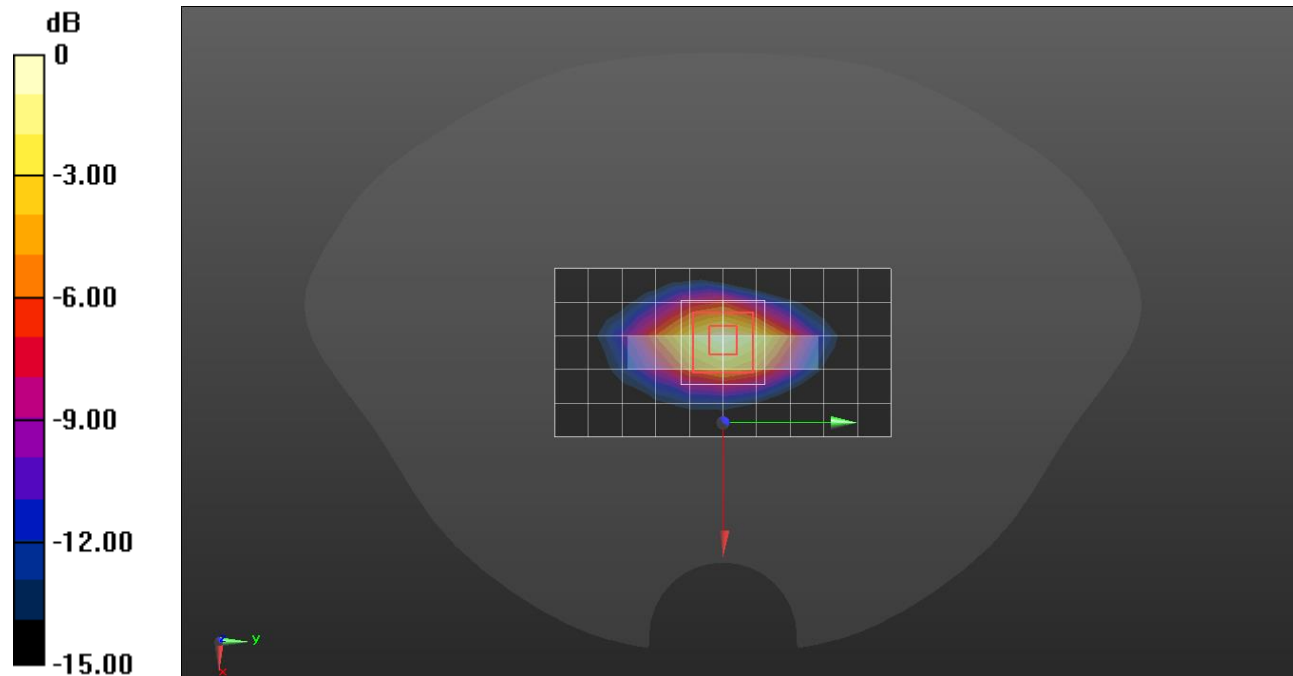

0 dB = 1.31 W/kg = 1.17 dBW/kg

Measurement Report for SM-F956D, CHEEK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 1 (2412.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2412.0	8.45	1.72	38.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.105	0.104
psSAR10g [W/Kg]	0.051	0.048
Power Drift [dB]		0.14
M2/M1 [%]		80.4
Dist 3dB Peak [mm]		9.5

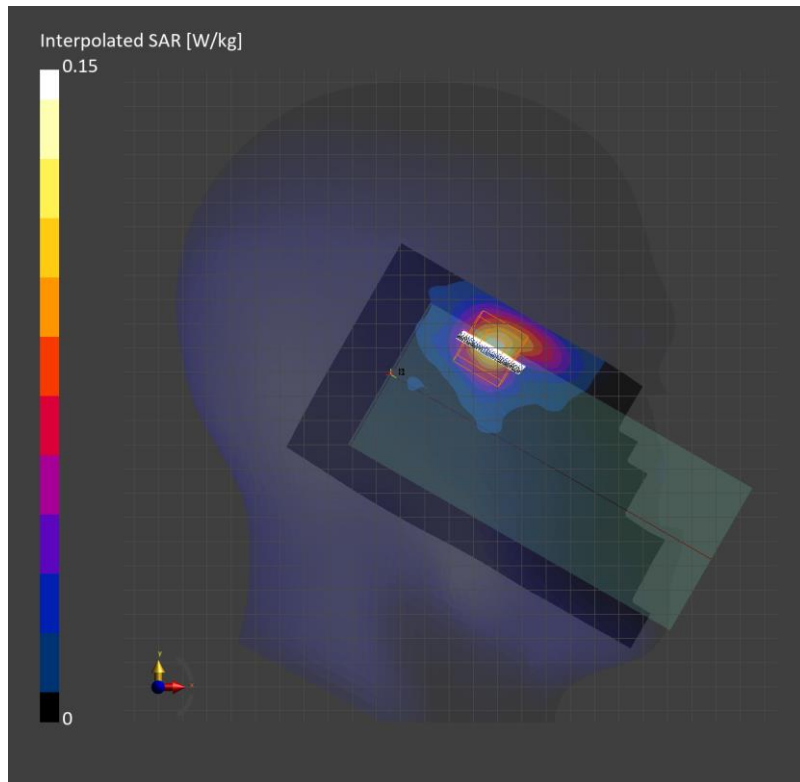

Measurement Report for SM-F956D, BACK, WLAN 2.4GHz, IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 1 (2412.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10415-AAA	2412.0	8.45	1.72	38.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.123	0.139
psSAR10g [W/Kg]	0.064	0.067
Power Drift [dB]		-0.05
M2/M1 [%]		79.4
Dist 3dB Peak [mm]		9.0

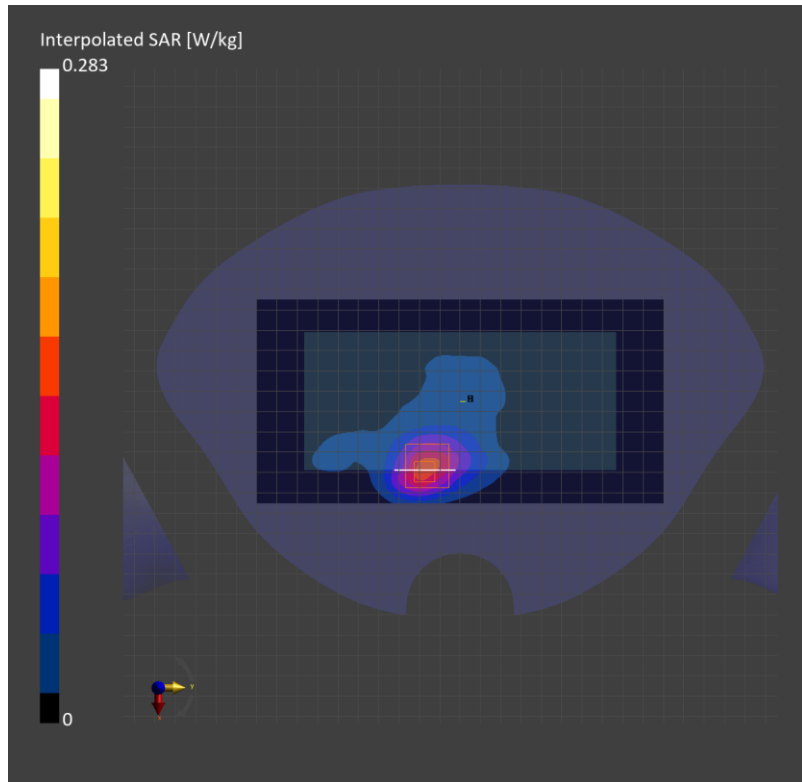



Measurement Report for SM-F956D, TILT, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 6 (2437.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2437.0	8.45	1.73	38.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.314	0.317
psSAR10g [W/Kg]	0.140	0.144
Power Drift [dB]		-0.01
M2/M1 [%]		78.3
Dist 3dB Peak [mm]		7.1

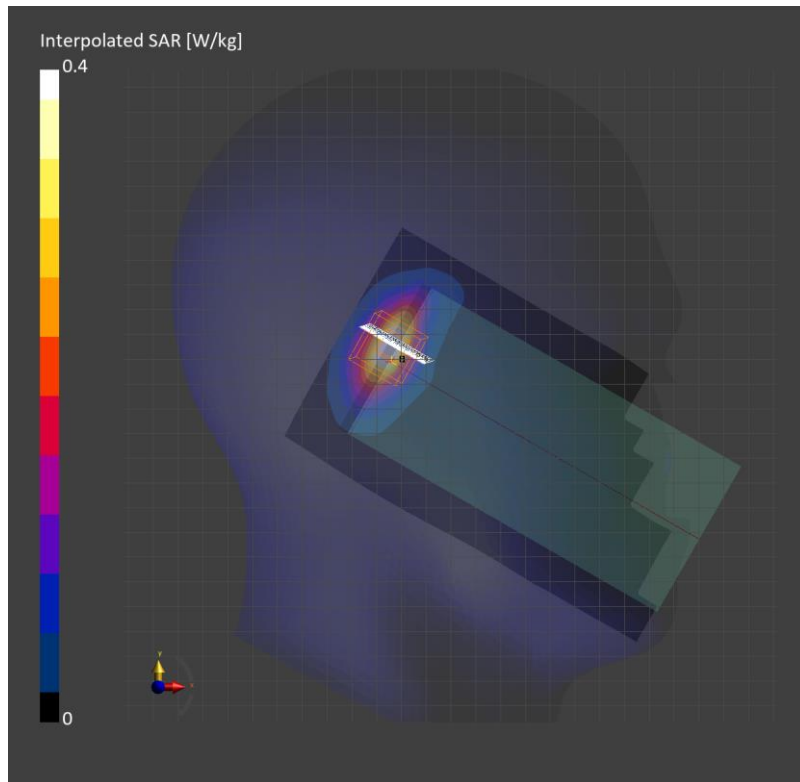

Measurement Report for SM-F956D, EDGE TOP, WLAN 2.4GHz, IEEE 802.11 b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 6 (2437.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	WLAN 2.4GHz	WLAN, 10415-AAA	2437.0	8.45	1.73	38.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.351	0.363
psSAR10g [W/Kg]	0.177	0.184
Power Drift [dB]		0.03
M2/M1 [%]		80.6
Dist 3dB Peak [mm]		10.2

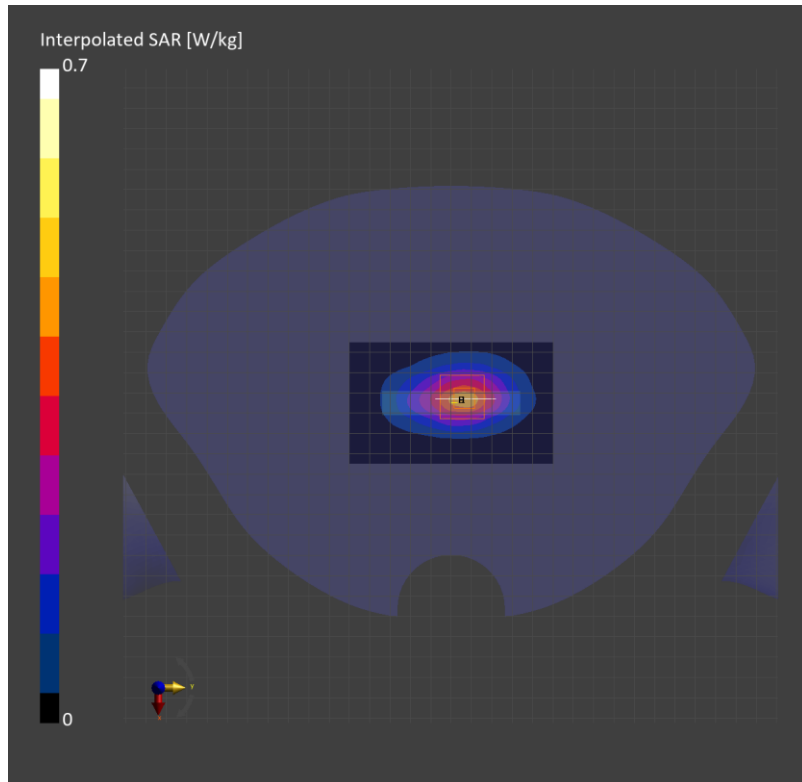

Measurement Report for SM-F956D, TILT, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 1 (2412.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 2.4GHz	WLAN, 10415-AAA	2412.0	8.45	1.72	38.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.371	0.361
psSAR10g [W/Kg]	0.174	0.171
Power Drift [dB]	0.03	
M2/M1 [%]	76.3	
Dist 3dB Peak [mm]	8.0	

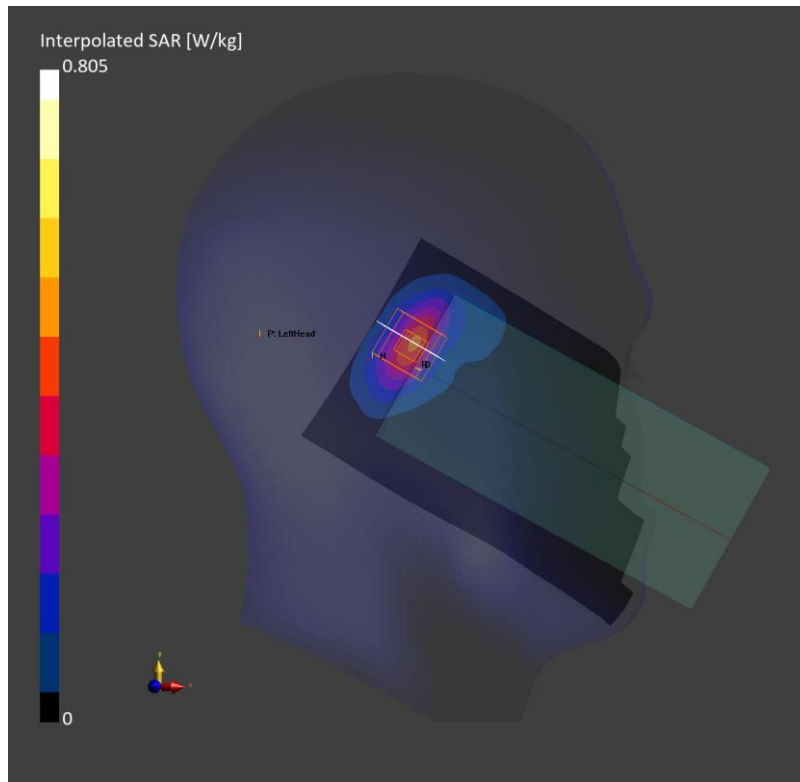

Measurement Report for SM-F956D, BACK, WLAN 2.4GHz, IEEE 802.11b WIFI 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle), Channel 1 (2412.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10415-AAA	2412.0	8.45	1.75	41.8

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.329	0.350
psSAR10g [W/Kg]	0.169	0.170
Power Drift [dB]		0.16
M2/M1 [%]		81.4
Dist 3dB Peak [mm]		9.5

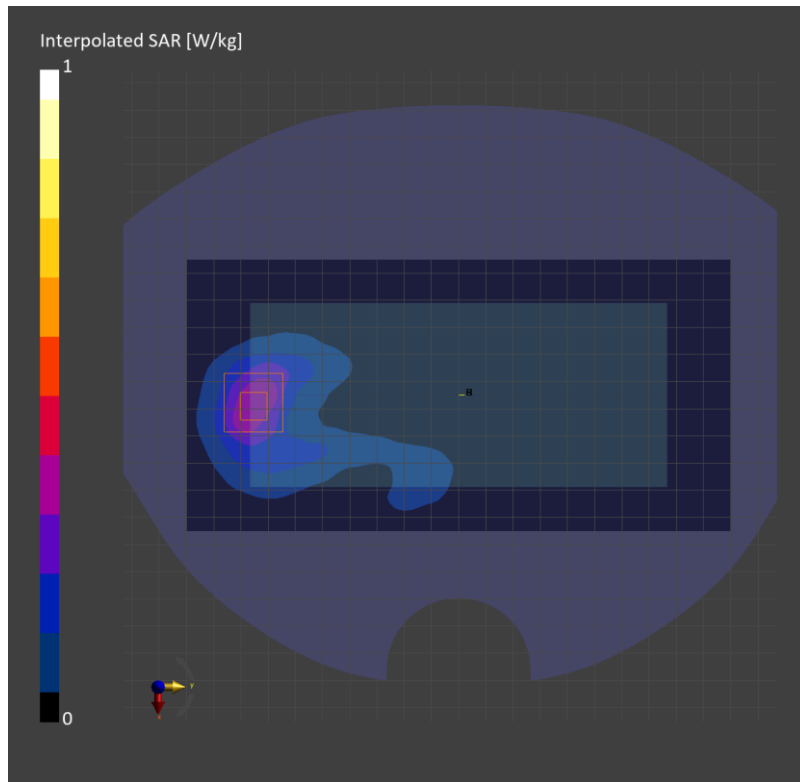

Measurement Report for SM-F956D, CHEEK, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.6 x 3.6 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.370	0.496
psSAR10g [W/Kg]	0.117	0.110
Power Drift [dB]	0.05	
M2/M1 [%]	62.9	
Dist 3dB Peak [mm]	3.3	

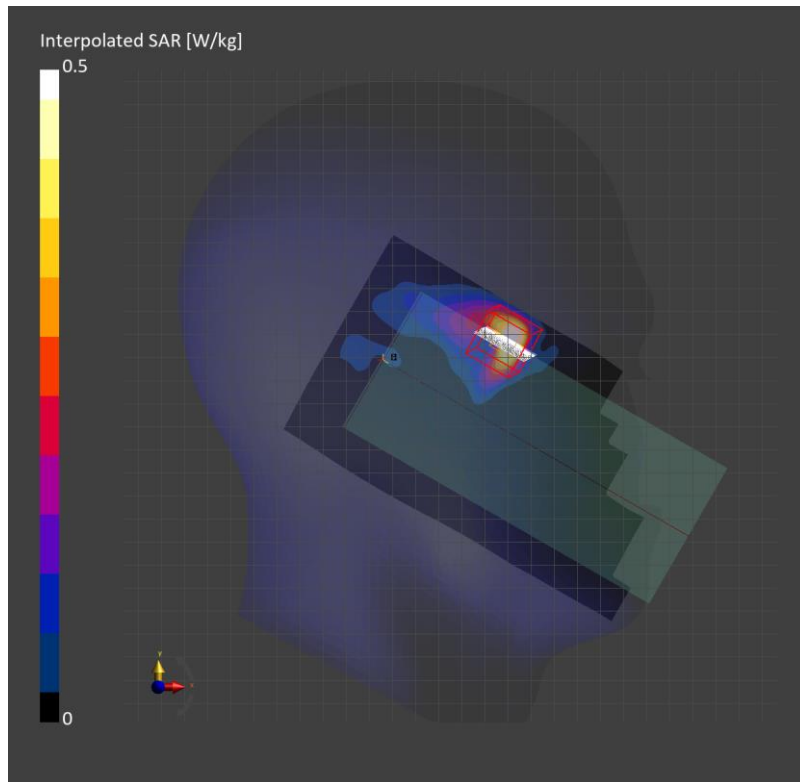

Measurement Report for SM-F956D, BACK, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.12	4.58	35.3

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.222	0.190
psSAR10g [W/Kg]	0.076	0.054
Power Drift [dB]		-0.09
M2/M1 [%]		67.3
Dist 3dB Peak [mm]		6.5

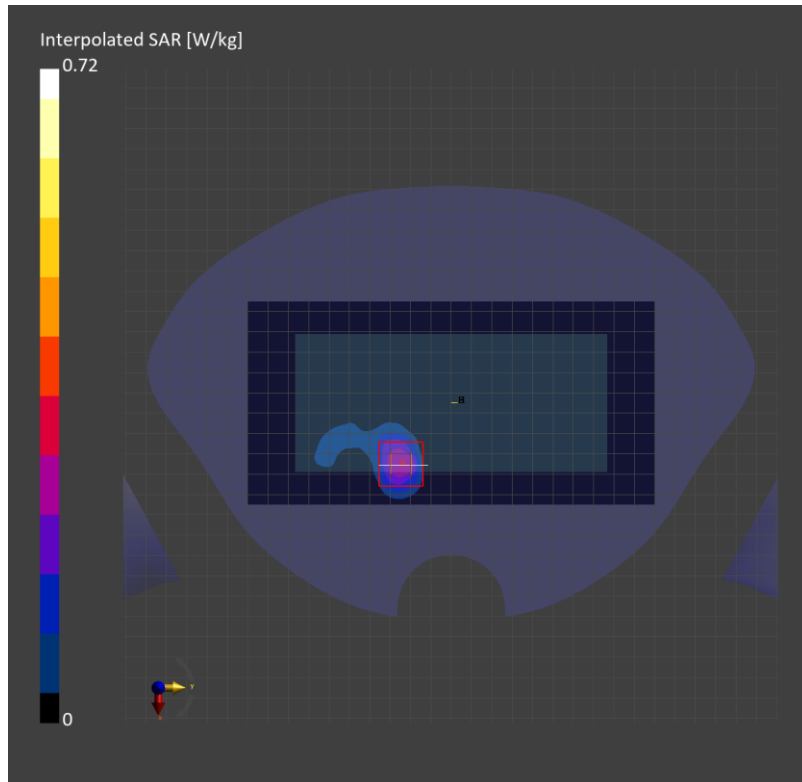

Measurement Report for SM-F956D, EDGE RIGHT, U-NII-1, U-NII-2A, IEEE 802.11 n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.65	4.37
psSAR10g [W/Kg]	1.00	1.11
Power Drift [dB]		-0.02
M2/M1 [%]		54.7
Dist 3dB Peak [mm]		3.6

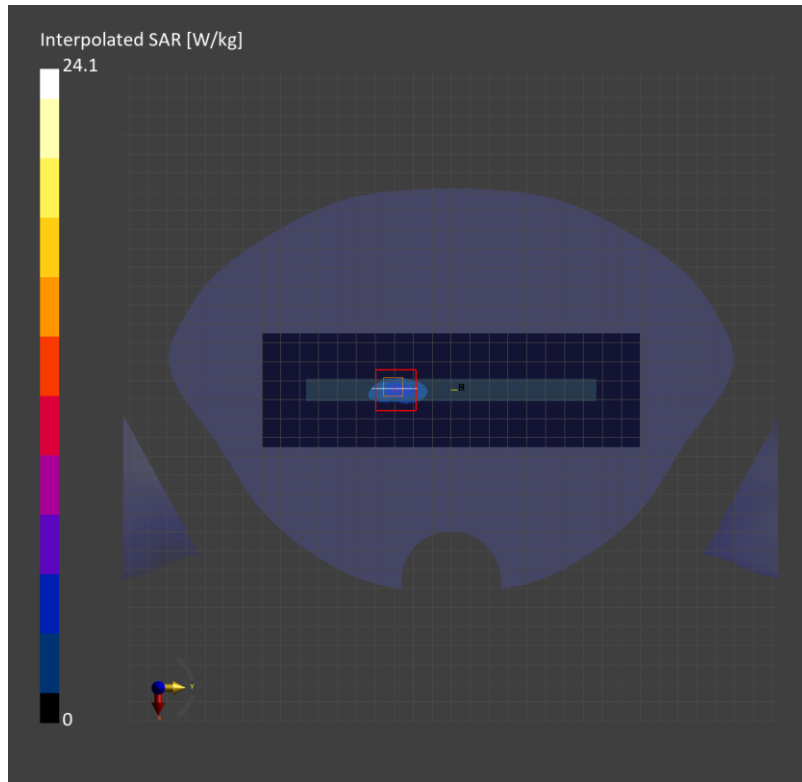

Measurement Report for SM-F956D, CHEEK, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.8 x 3.8 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.136	0.145
psSAR10g [W/Kg]	0.037	0.029
Power Drift [dB]	-0.09	
M2/M1 [%]	62.7	
Dist 3dB Peak [mm]	3.9	

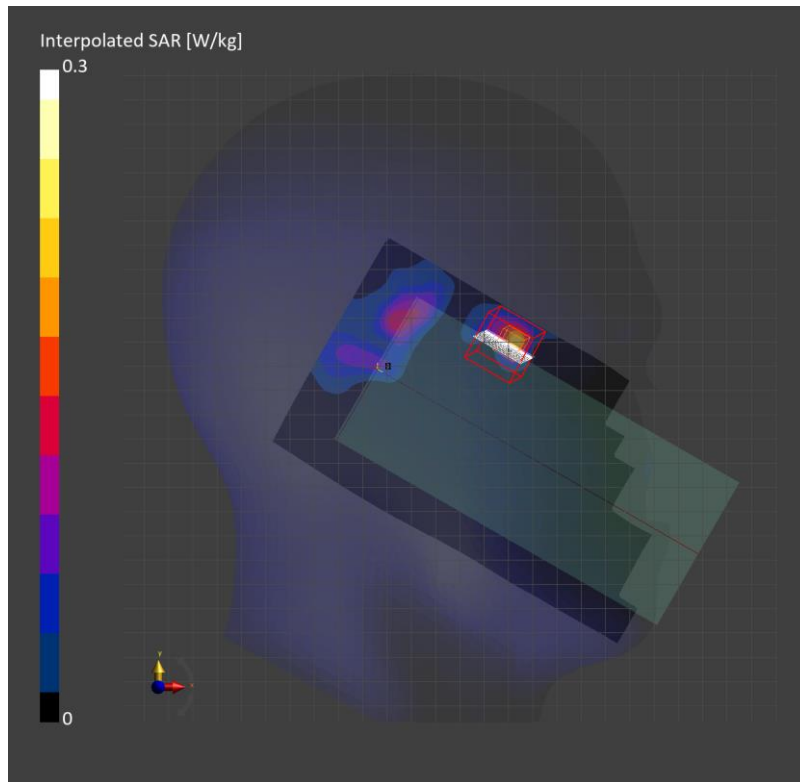



Measurement Report for SM-F956D, BACK, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.256	0.253
psSAR10g [W/Kg]	0.099	0.094
Power Drift [dB]		-0.15
M2/M1 [%]		69.6
Dist 3dB Peak [mm]		9.6

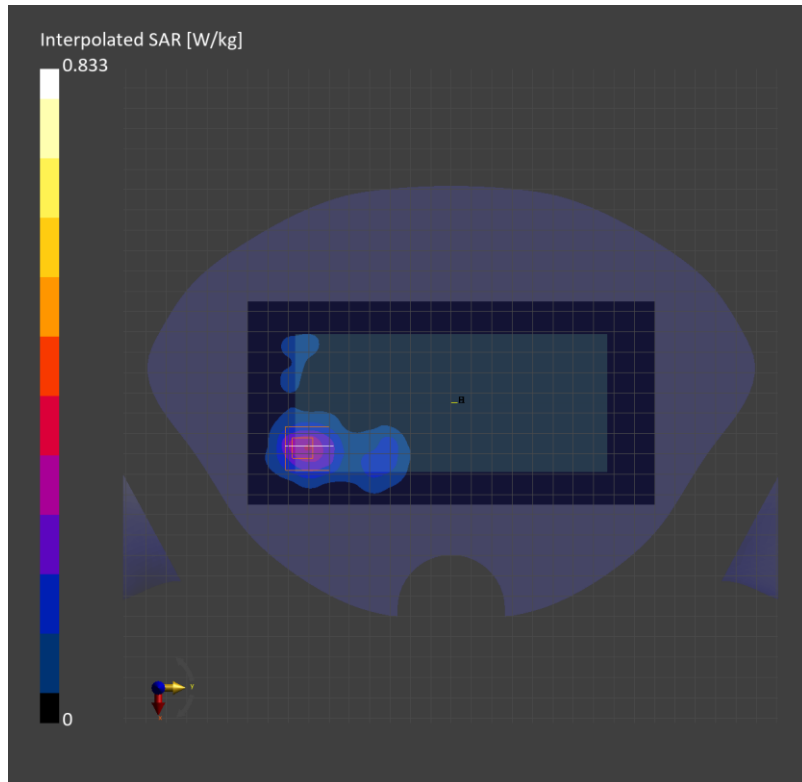

Measurement Report for SM-F956D, EDGE TOP, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	2.35	2.86
psSAR10g [W/Kg]	0.697	0.826
Power Drift [dB]		0.02
M2/M1 [%]		54.1
Dist 3dB Peak [mm]		5.1

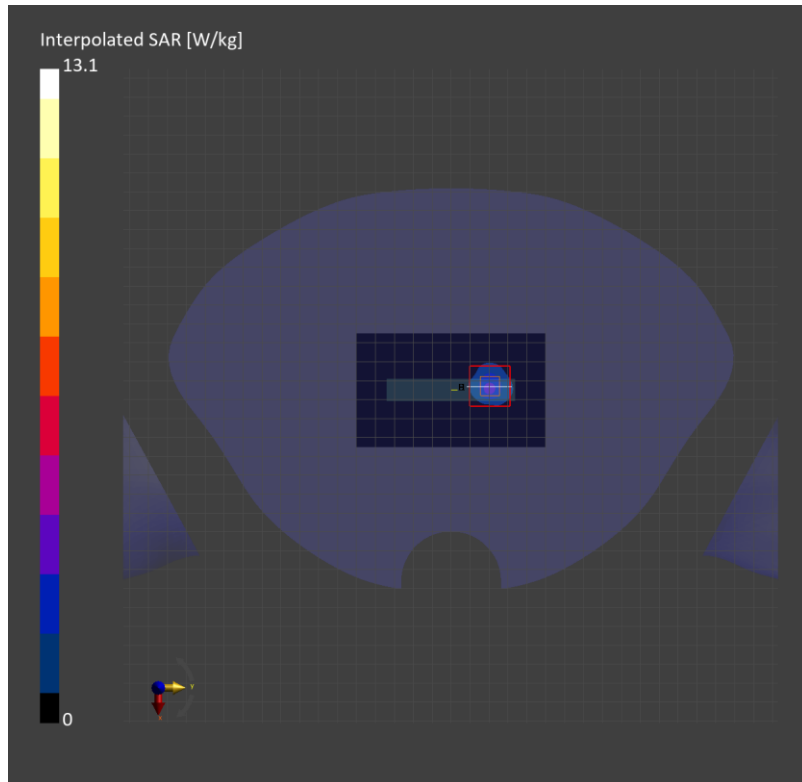

Measurement Report for SM-F956D, CHEEK, U-NII-1, U-NII-2A, IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.451	0.544
psSAR10g [W/Kg]	0.138	0.133
Power Drift [dB]	-0.05	
M2/M1 [%]	68.4	
Dist 3dB Peak [mm]	4.9	

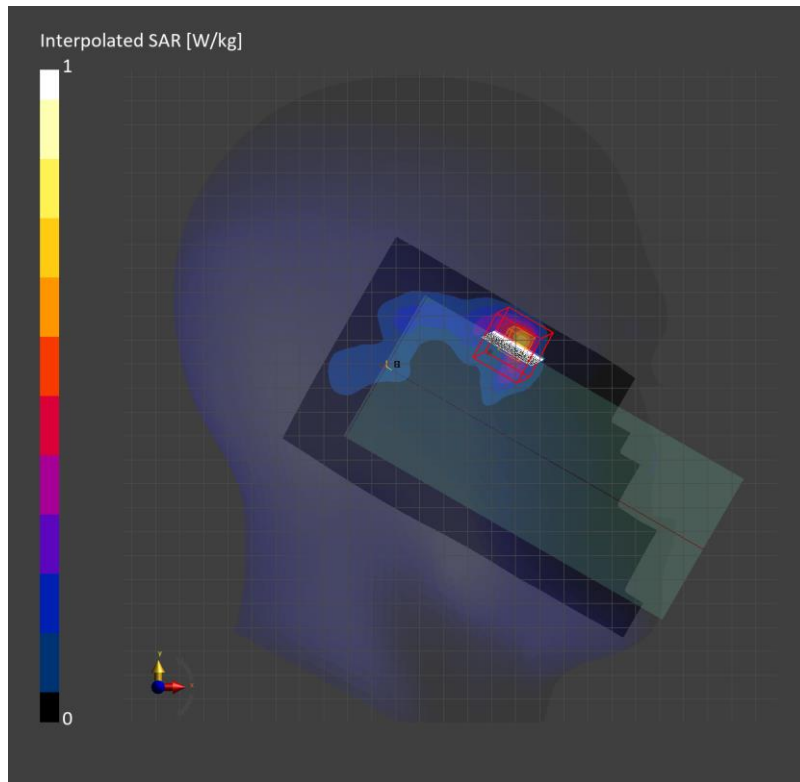

**Exposure Conditions**

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

**Hardware Setup**


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

**Scans Setup**

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

**Measurement Results**

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.354	0.371
psSAR10g [W/Kg]	0.136	0.139
Power Drift [dB]		-0.05
M2/M1 [%]		67.5
Dist 3dB Peak [mm]		8.2

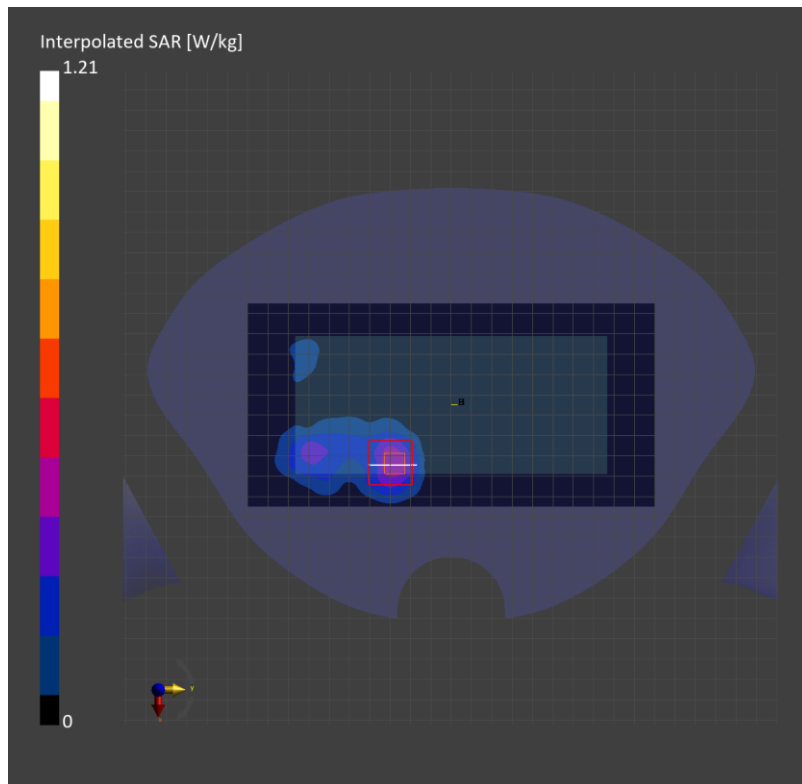

Measurement Report for SM-F956D, EDGE RIGHT, U-NII-1, U-NII-2A, IEEE 802.11 n (HT Mixed, 40MHz, MCS0, 90pc duty cycle), Channel 54 (5270.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-1, U-NII-2A	WLAN, 10599-AAC	5270.0	5.76	4.61	37.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.56	4.82
psSAR10g [W/Kg]	1.29	1.32
Power Drift [dB]		-0.04
M2/M1 [%]		59.5
Dist 3dB Peak [mm]		4.0

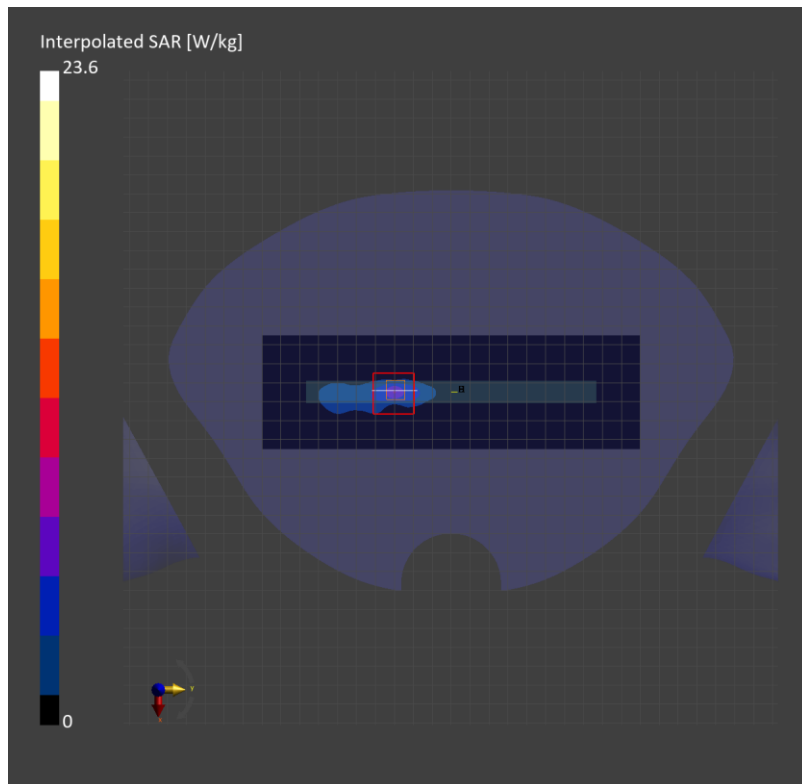

Measurement Report for SM-F956D, CHEEK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.260	0.262
psSAR10g [W/Kg]	0.092	0.080
Power Drift [dB]		-0.09
M2/M1 [%]		69.1
Dist 3dB Peak [mm]		5.7

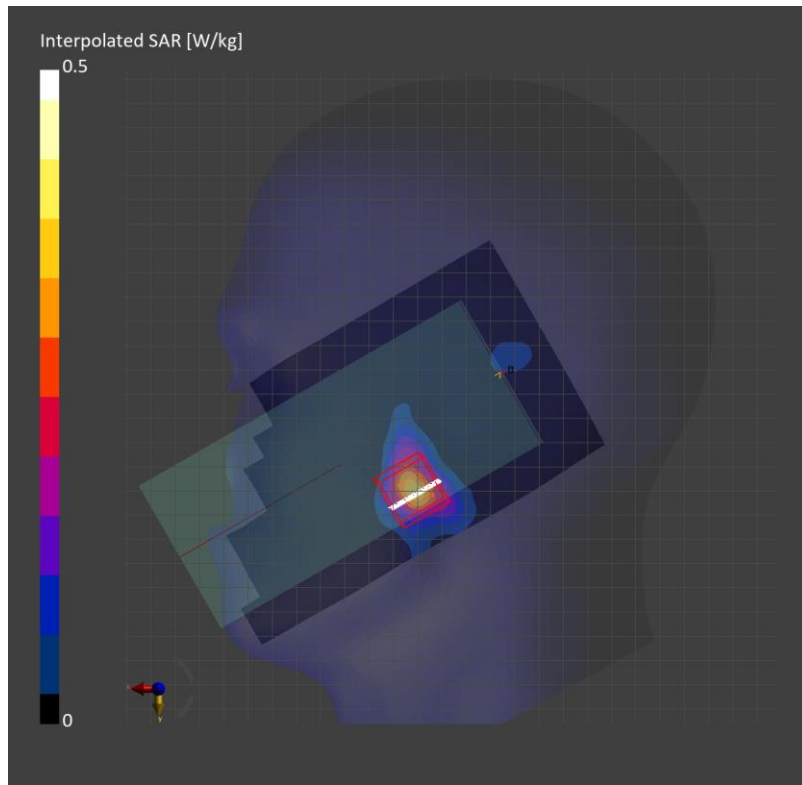

Measurement Report for SM-F956D, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.206	0.217
psSAR10g [W/Kg]	0.081	0.068
Power Drift [dB]		0.12
M2/M1 [%]		68.0
Dist 3dB Peak [mm]		7.4

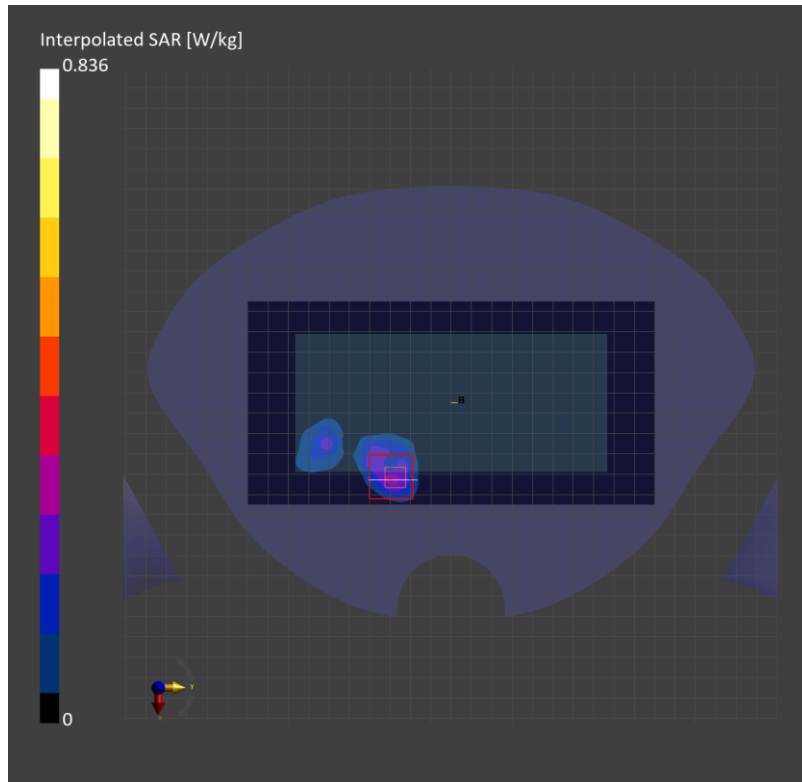

Measurement Report for SM-F956D, EDGE RIGHT, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.48	4.25
psSAR10g [W/Kg]	1.22	1.15
Power Drift [dB]		-0.00
M2/M1 [%]		64.7
Dist 3dB Peak [mm]		3.2

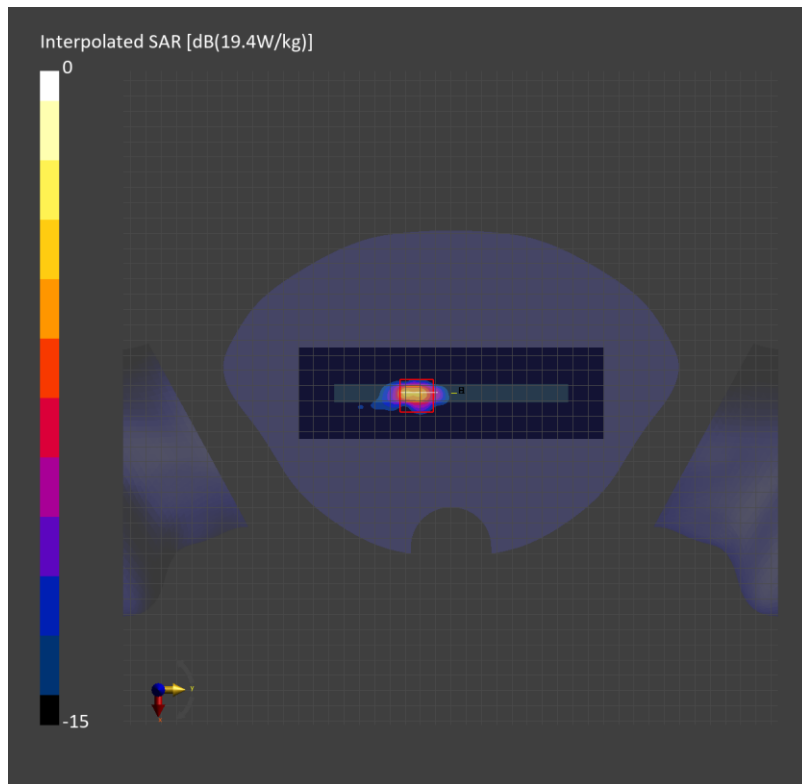



Measurement Report for SM-F956D, TILT, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	TILT, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.220	0.197
psSAR10g [W/Kg]	0.076	0.057
Power Drift [dB]		-0.01
M2/M1 [%]		66.8
Dist 3dB Peak [mm]		7.4

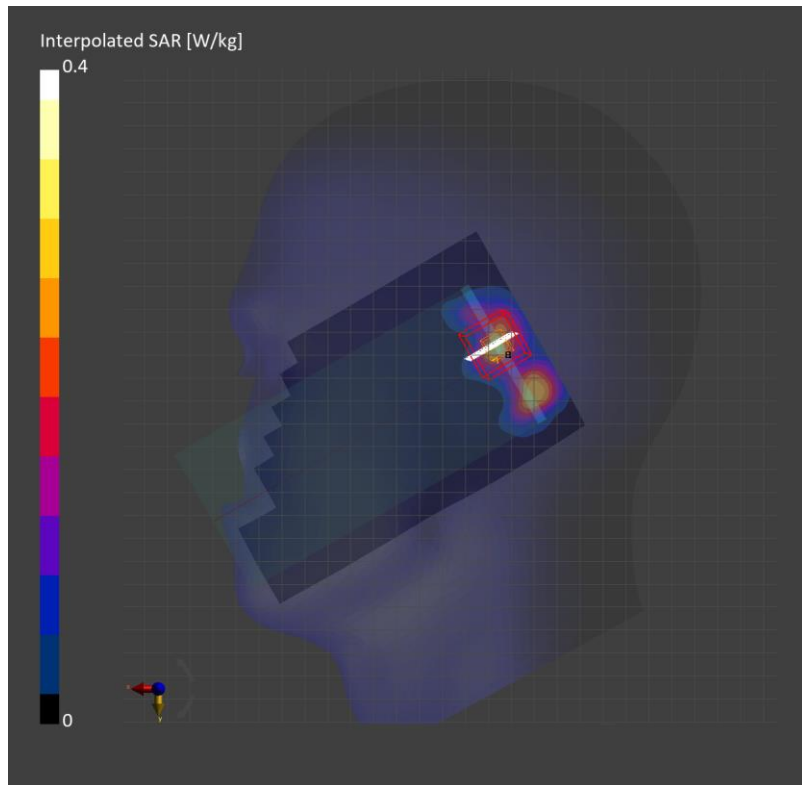

Measurement Report for SM-F956D, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.368	0.376
psSAR10g [W/Kg]	0.127	0.127
Power Drift [dB]		0.08
M2/M1 [%]		68.3
Dist 3dB Peak [mm]		9.0

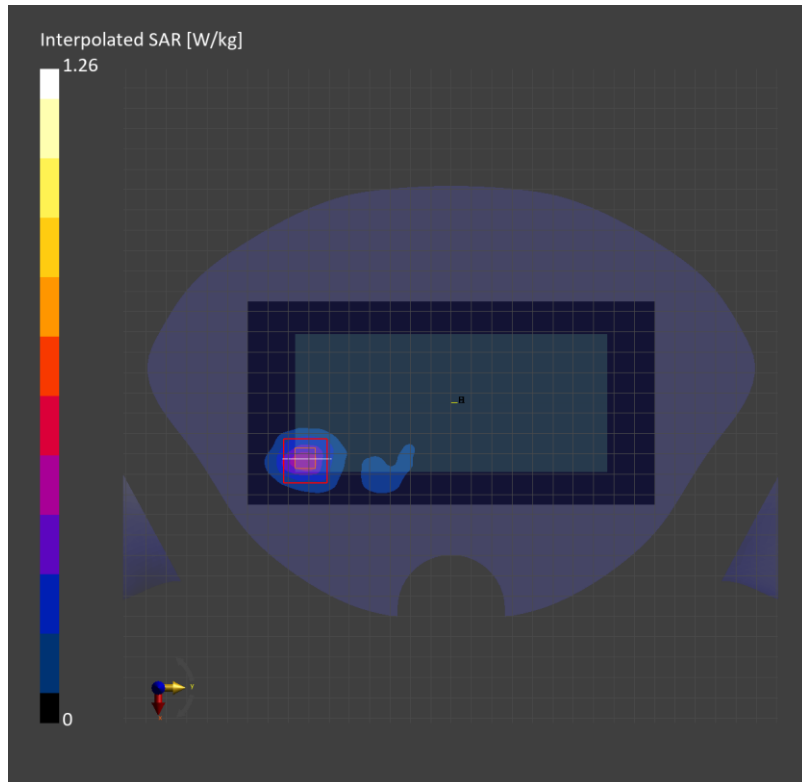

Measurement Report for SM-F956D, EDGE TOP, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.70	4.32
psSAR10g [W/Kg]	1.02	1.16
Power Drift [dB]		-0.00
M2/M1 [%]		59.3
Dist 3dB Peak [mm]		4.7

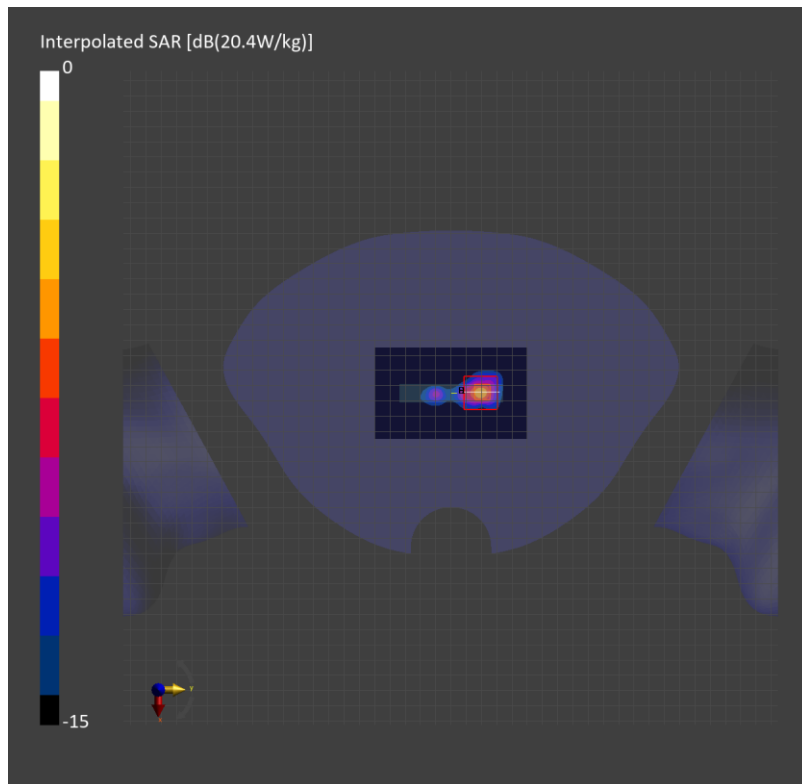

Measurement Report for SM-F956D, TILT, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.348	0.337
psSAR10g [W/Kg]	0.098	0.089
Power Drift [dB]		-0.15
M2/M1 [%]		62.5
Dist 3dB Peak [mm]		5.7

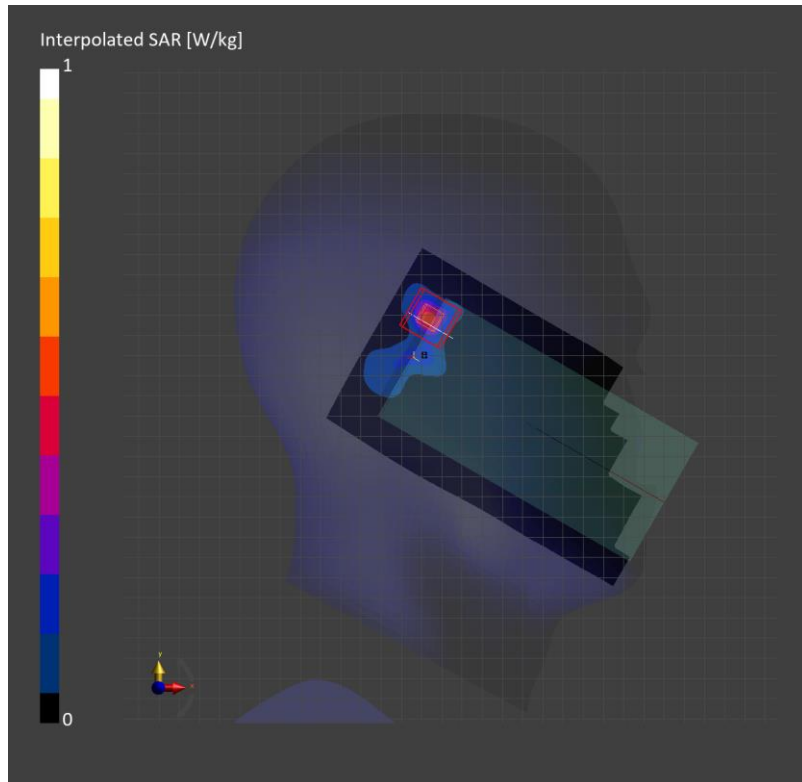

Measurement Report for SM-F956D, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.450	0.462
psSAR10g [W/Kg]	0.168	0.158
Power Drift [dB]		0.02
M2/M1 [%]		68.5
Dist 3dB Peak [mm]		7.6

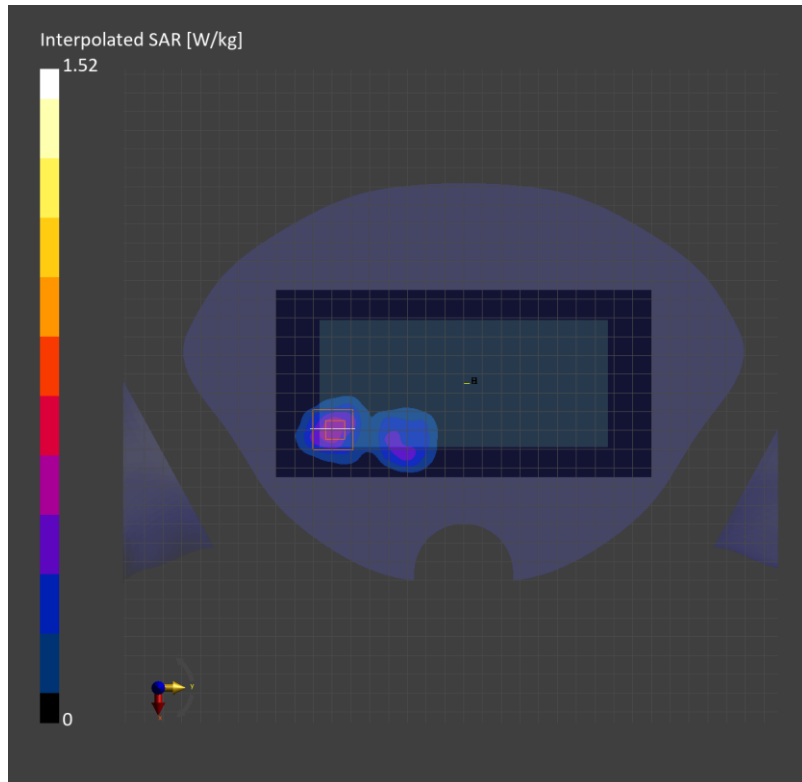

Measurement Report for SM-F956D, EDGE TOP, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 122 (5610.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	U-NII-2C Standalone	WLAN, 10626-AAC	5610.0	5.11	5.06	35.9

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.44	5.26
psSAR10g [W/Kg]	1.25	1.42
Power Drift [dB]		-0.08
M2/M1 [%]		62.9
Dist 3dB Peak [mm]		4.0

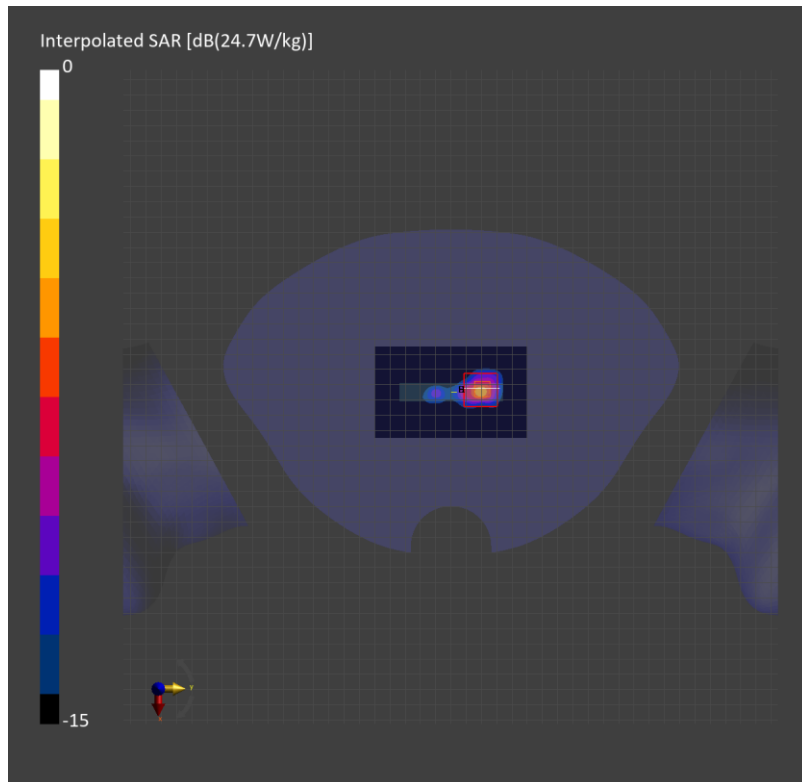

Measurement Report for SM-F956D, CHEEK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.327	0.318
psSAR10g [W/Kg]	0.113	0.096
Power Drift [dB]	0.10	
M2/M1 [%]	66.2	
Dist 3dB Peak [mm]	6.8	

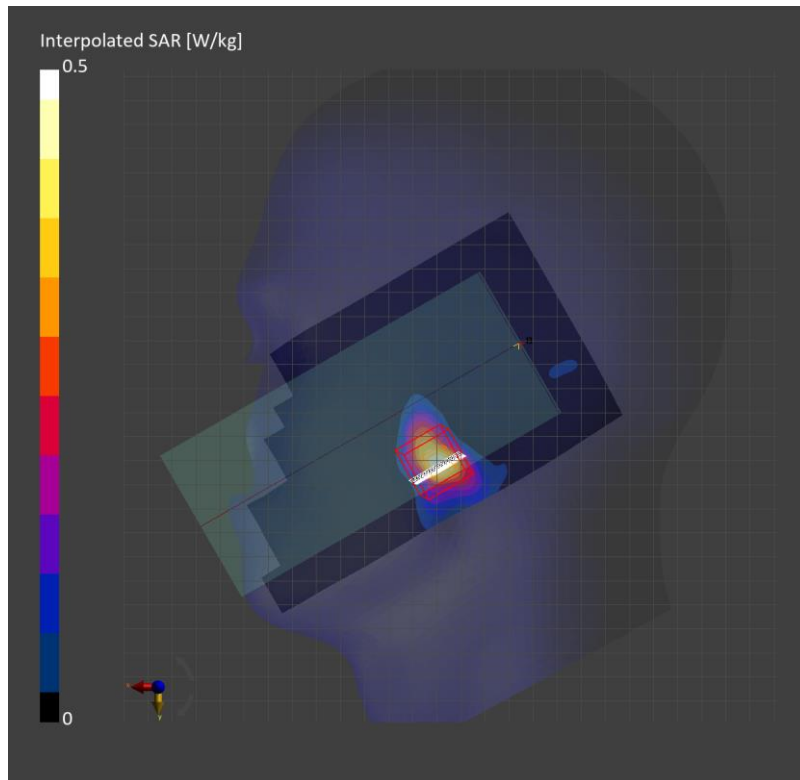

Measurement Report for SM-F956D, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.202	0.220
psSAR10g [W/Kg]	0.073	0.062
Power Drift [dB]		0.08
M2/M1 [%]		61.1
Dist 3dB Peak [mm]		5.4

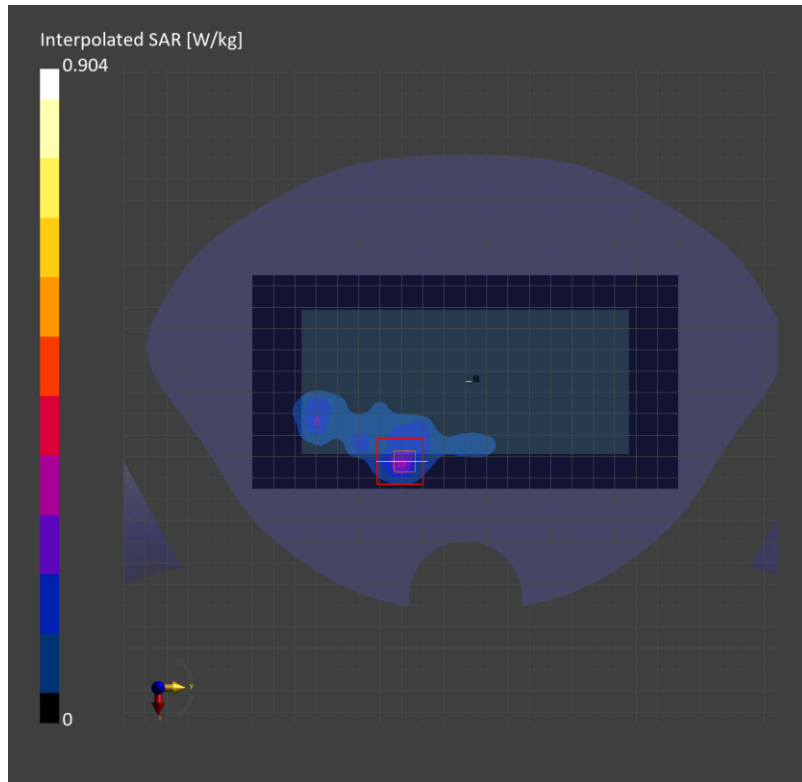



Measurement Report for SM-F956D, EDGE RIGHT, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.68	3.29
psSAR10g [W/Kg]	1.09	0.973
Power Drift [dB]		0.06
M2/M1 [%]		57.6
Dist 3dB Peak [mm]		2.9

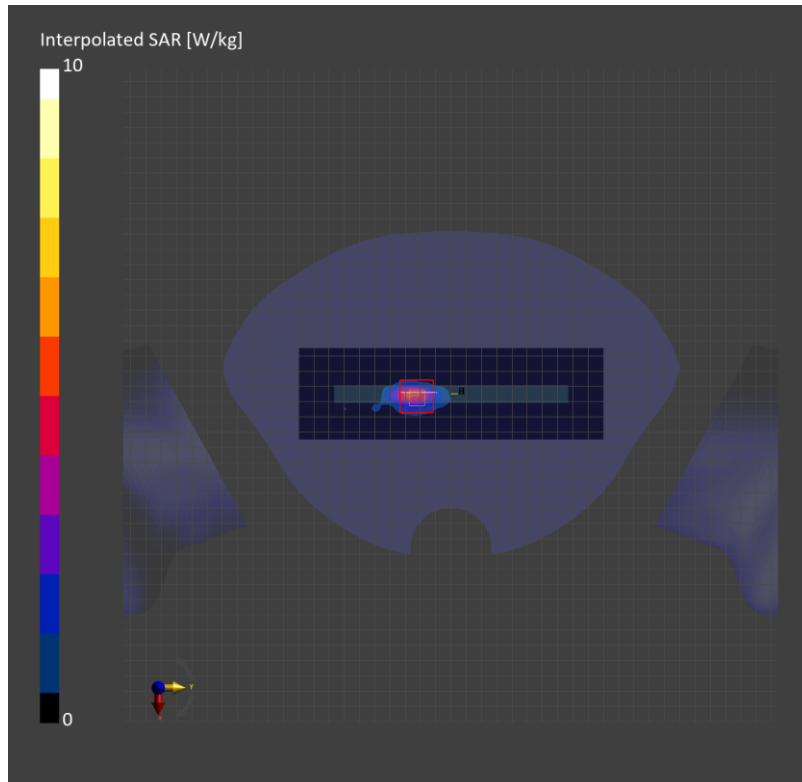

Measurement Report for SM-F956D, TILT, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.379	0.429
psSAR10g [W/Kg]	0.120	0.106
Power Drift [dB]	-0.01	
M2/M1 [%]	64.4	
Dist 3dB Peak [mm]	6.8	

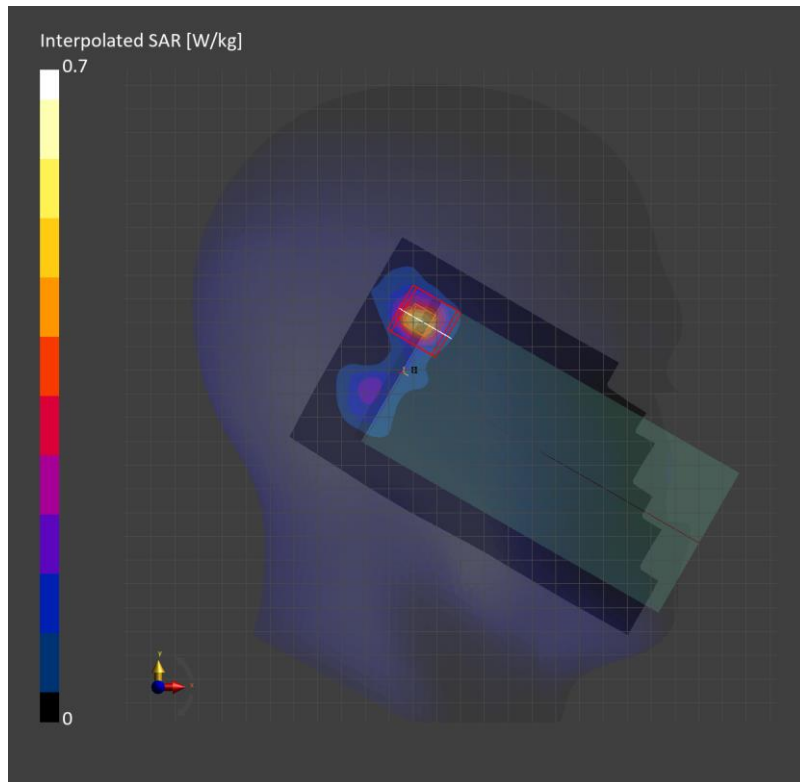

Measurement Report for SM-F956D, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.299	0.276
psSAR10g [W/Kg]	0.102	0.086
Power Drift [dB]		0.07
M2/M1 [%]		68.0
Dist 3dB Peak [mm]		8.7

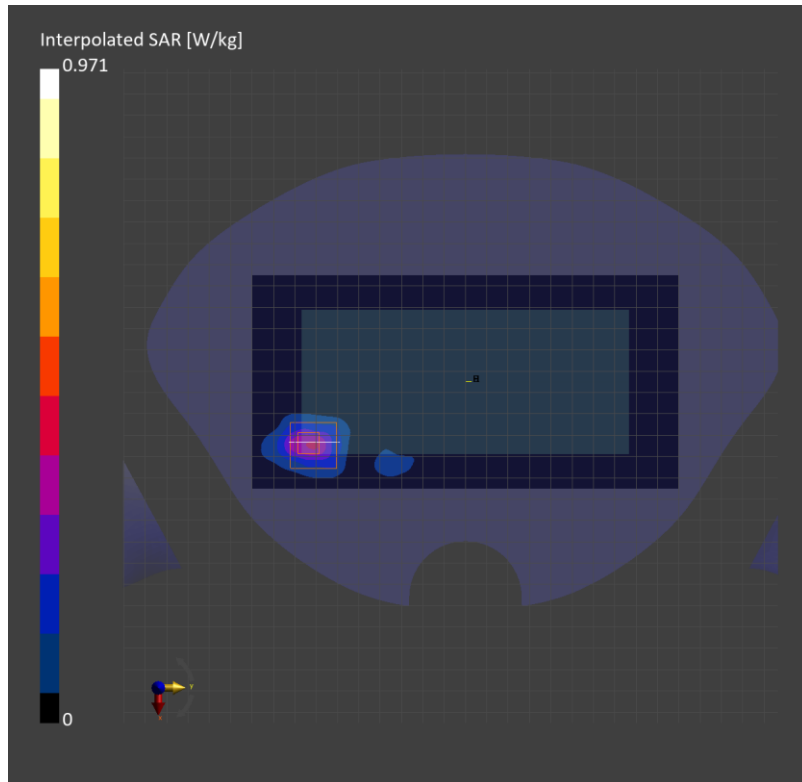

Measurement Report for SM-F956D, EDGE TOP, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.71	4.38
psSAR10g [W/Kg]	1.02	1.17
Power Drift [dB]		-0.04
M2/M1 [%]		61.2
Dist 3dB Peak [mm]		4.4

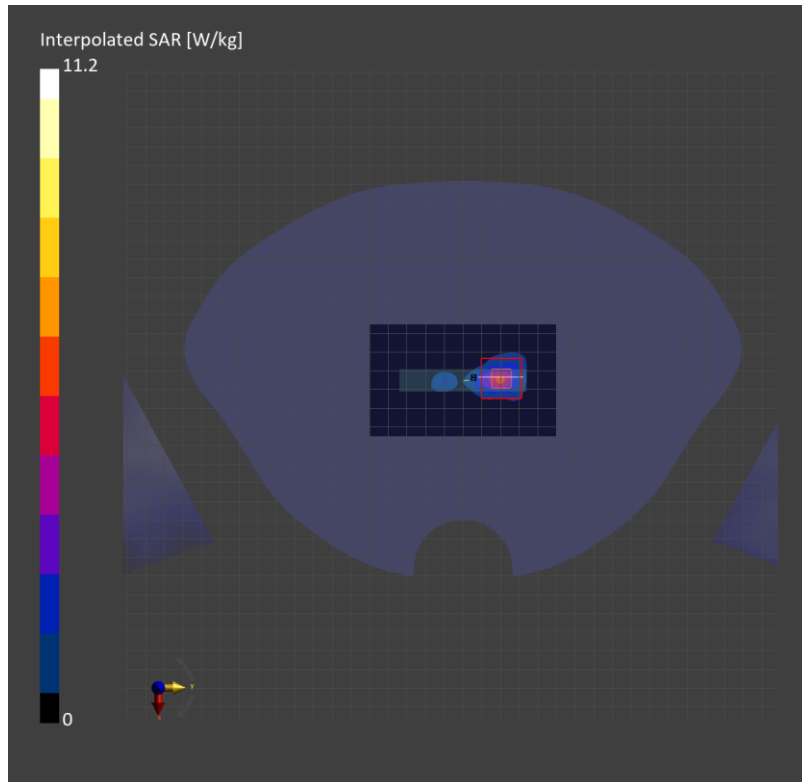

Measurement Report for SM-F956D, TILT, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.447	0.457
psSAR10g [W/Kg]	0.127	0.116
Power Drift [dB]	0.08	
M2/M1 [%]	61.0	
Dist 3dB Peak [mm]	6.8	

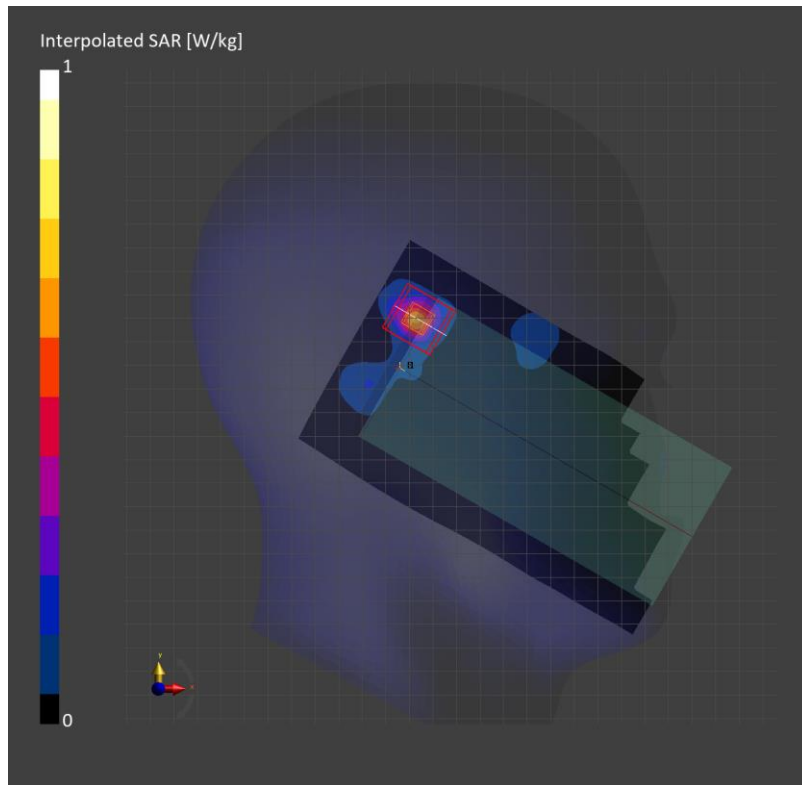

Measurement Report for SM-F956D, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.447	0.450
psSAR10g [W/Kg]	0.163	0.147
Power Drift [dB]		0.07
M2/M1 [%]		64.3
Dist 3dB Peak [mm]		8.8

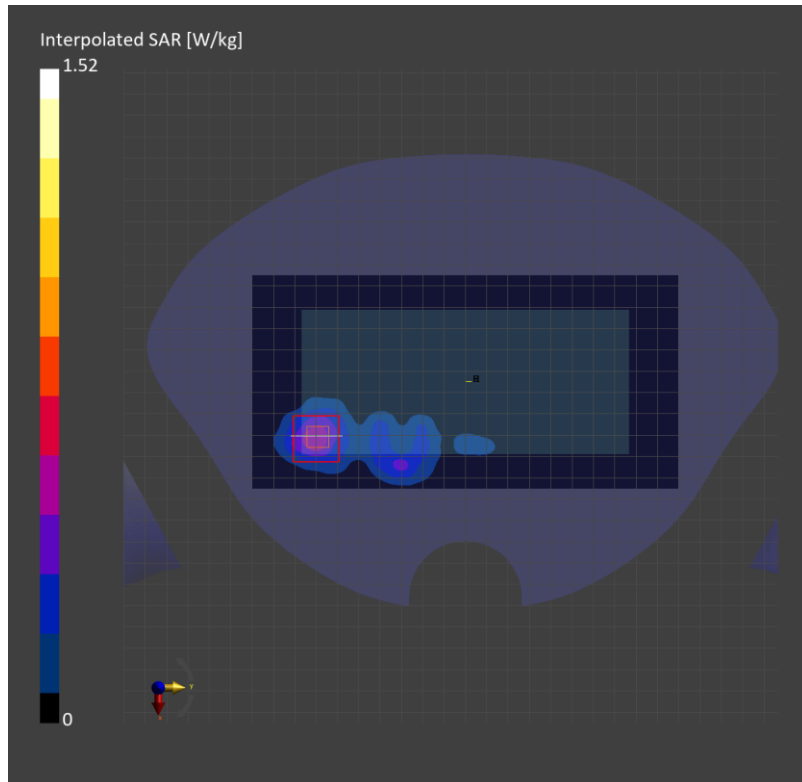

Measurement Report for SM-F956D, EDGE RIGHT, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 155 (5775.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	WLAN 5GHz	WLAN, 10626-AAC	5775.0	5.12	5.26	35.7

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.64	4.50
psSAR10g [W/Kg]	1.21	1.21
Power Drift [dB]	0.01	
M2/M1 [%]	58.4	
Dist 3dB Peak [mm]	4.7	

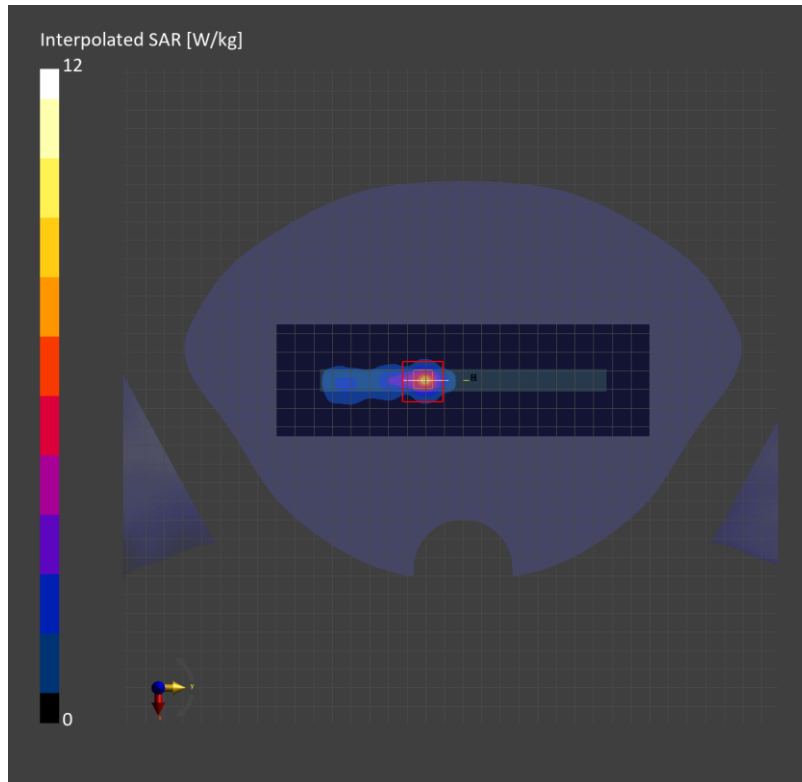

Measurement Report for SM-F956D, CHEEK, U-NII-4, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	U-NII-4	WLAN, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.431	0.424
psSAR10g [W/Kg]	0.132	0.122
Power Drift [dB]		-0.17
M2/M1 [%]		66.2
Dist 3dB Peak [mm]		7.1

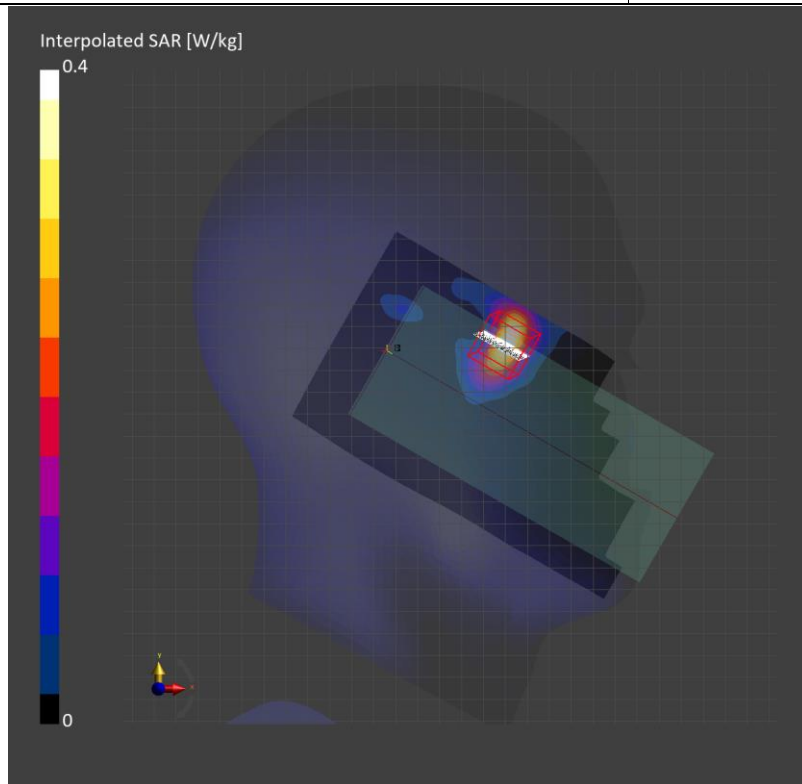



Measurement Report for SM-F956D, BACK, U-NII-4, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	U-NII-4	WLAN, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.199	0.244
psSAR10g [W/Kg]	0.065	0.064
Power Drift [dB]		0.03
M2/M1 [%]		67.5
Dist 3dB Peak [mm]		5.9

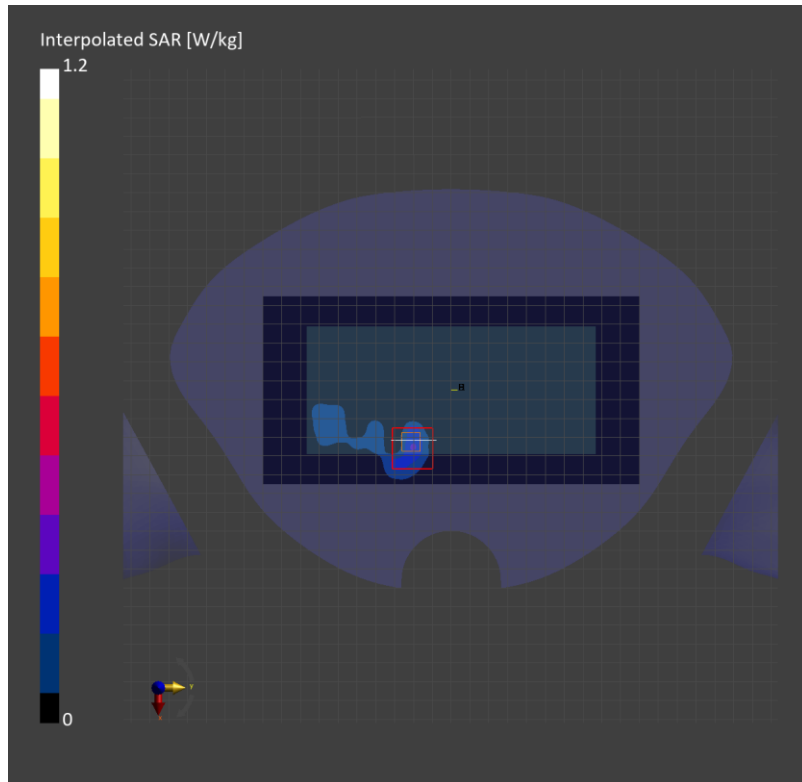

Measurement Report for SM-F956D, EDGE RIGHT, U-NII-4, IEEE 802.11ac WIFI (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	U-NII-4	WLAN, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.03	2.80
psSAR10g [W/Kg]	0.876	0.816
Power Drift [dB]		0.03
M2/M1 [%]		56.6
Dist 3dB Peak [mm]		4.0

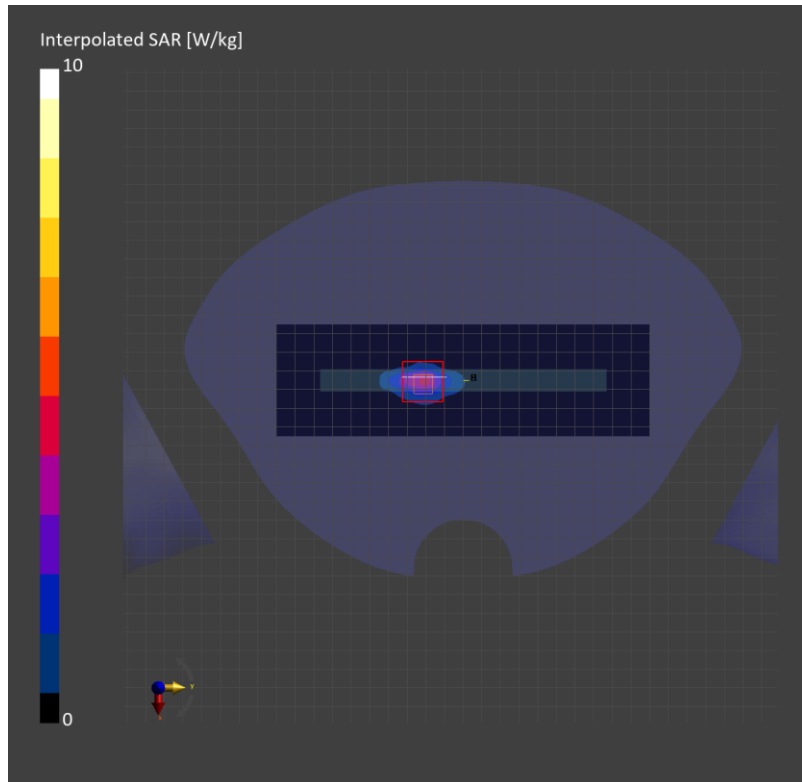

Measurement Report for SM-F956D, TILT, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.454	0.408
psSAR10g [W/Kg]	0.128	0.097
Power Drift [dB]	0.08	
M2/M1 [%]	65.9	
Dist 3dB Peak [mm]	5.8	

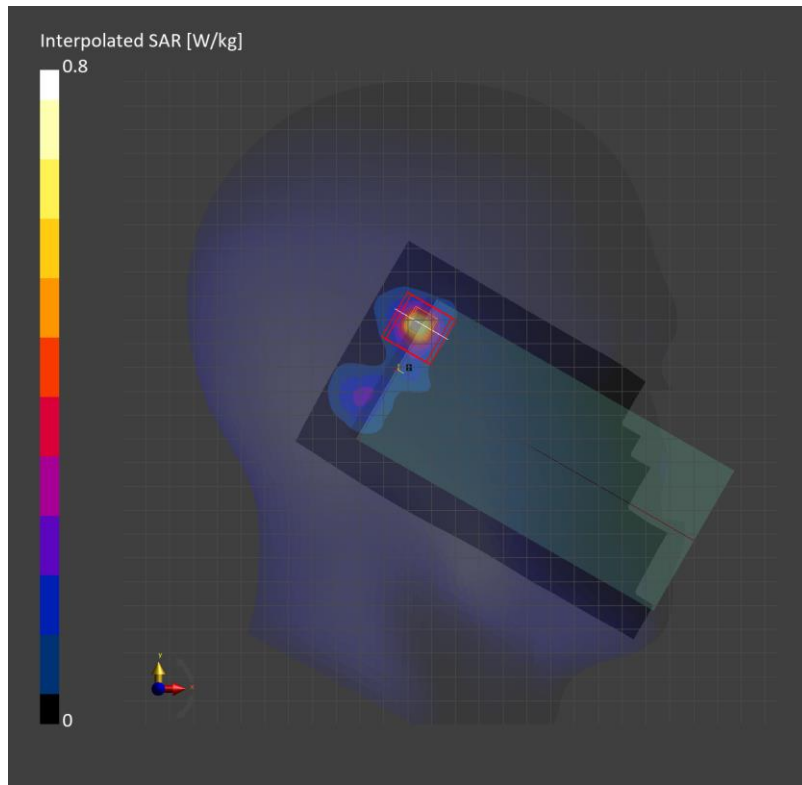

Measurement Report for SM-F956D, BACK, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.292	0.282
psSAR10g [W/Kg]	0.101	0.089
Power Drift [dB]		-0.12
M2/M1 [%]		65.6
Dist 3dB Peak [mm]		8.0

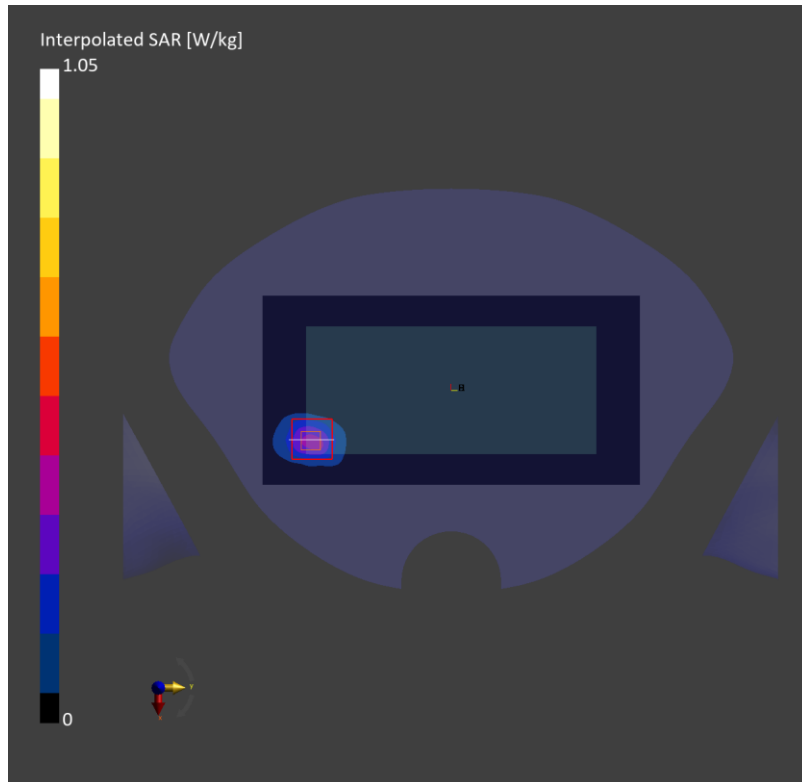

Measurement Report for SM-F956D, EDGE TOP, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 0.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.35	35.5

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	3.03	3.28
psSAR10g [W/Kg]	0.832	0.908
Power Drift [dB]		-0.07
M2/M1 [%]		57.1
Dist 3dB Peak [mm]		5.1

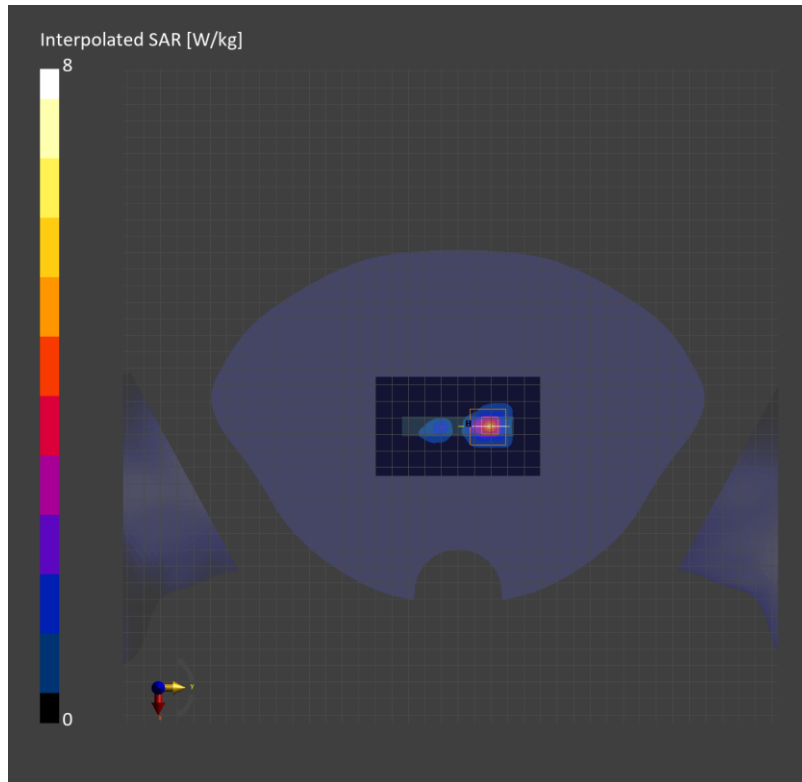

Measurement Report for SM-F956D, TILT, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.52	34.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.621	0.646
psSAR10g [W/Kg]	0.178	0.171
Power Drift [dB]		0.13
M2/M1 [%]		62.1
Dist 3dB Peak [mm]		5.8

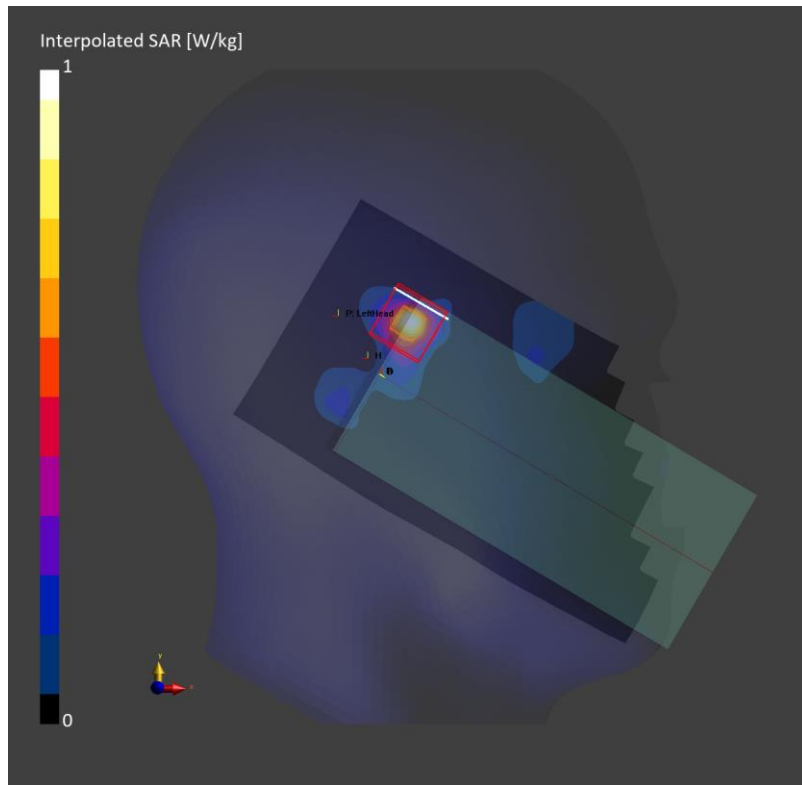

Measurement Report for SM-F956D, BACK, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.52	34.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.392	0.352
psSAR10g [W/Kg]	0.138	0.108
Power Drift [dB]		0.11
M2/M1 [%]		66.7
Dist 3dB Peak [mm]		7.9

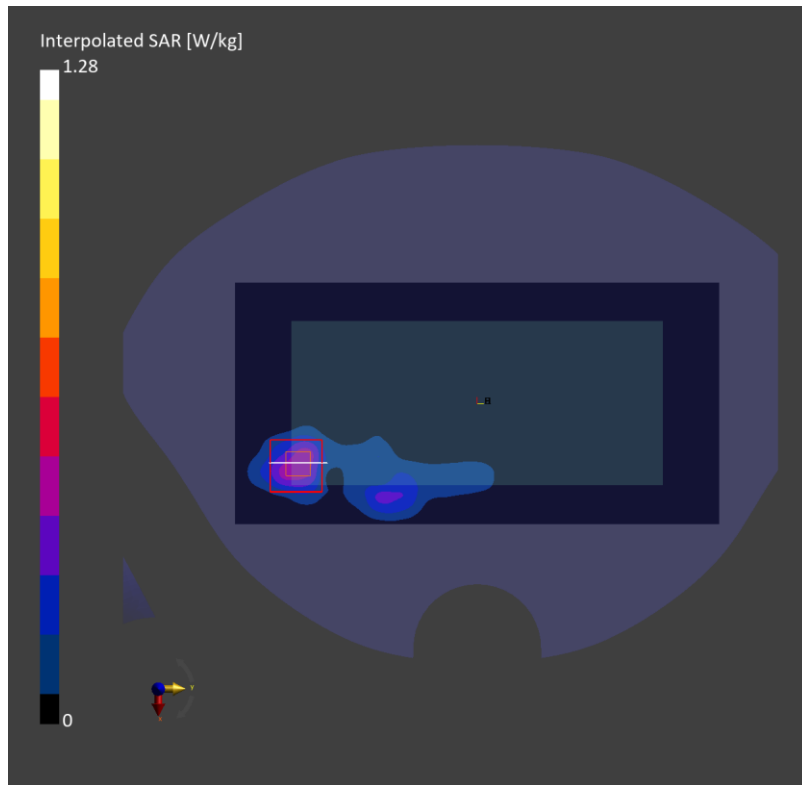

Measurement Report for SM-F956D, EDGE RIGHT, Custom Band, IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle), Channel 5855000 (5855.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 0.00	Custom Band	CW, 10626-AAC	5855.0	4.98	5.52	34.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	4.27	4.27
psSAR10g [W/Kg]	1.17	1.16
Power Drift [dB]		0.05
M2/M1 [%]		57.8
Dist 3dB Peak [mm]		4.7

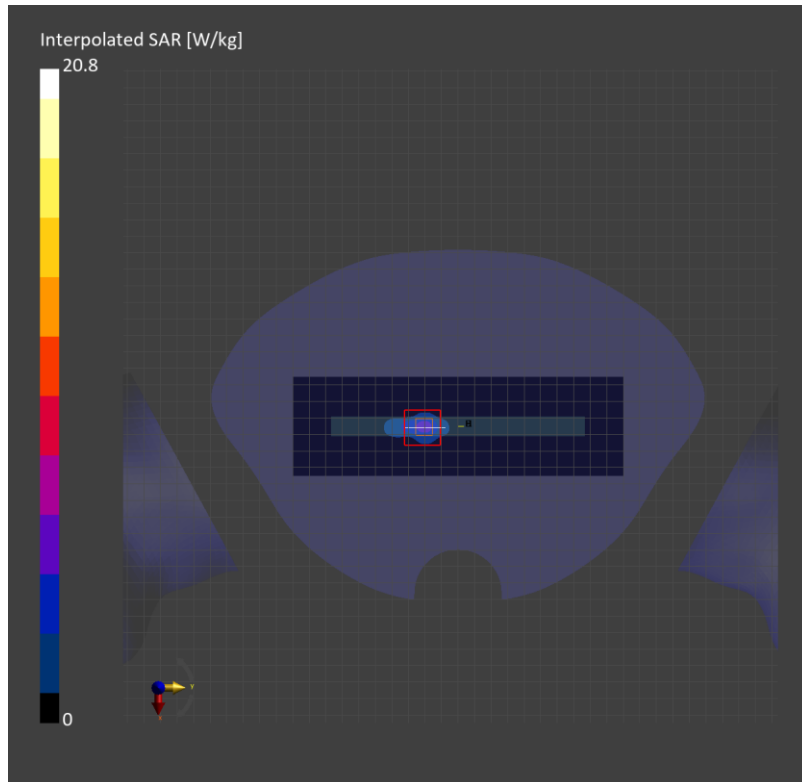



## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Left Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**LHS Touch/Bluetooth GFSK Ant 1 ch.39/Area Scan (10x15x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.0776 W/kg

**LHS Touch/Bluetooth GFSK Ant 1 ch.39/Zoom Scan (8x9x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.674 V/m; Power Drift = 0.00 dB  
 Peak SAR (extrapolated) = 0.0970 W/kg  
**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.018 W/kg**  
 Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 17.5 mm)  
 Ratio of SAR at M2 to SAR at M1 = 47%  
 Maximum value of SAR (measured) = 0.0741 W/kg

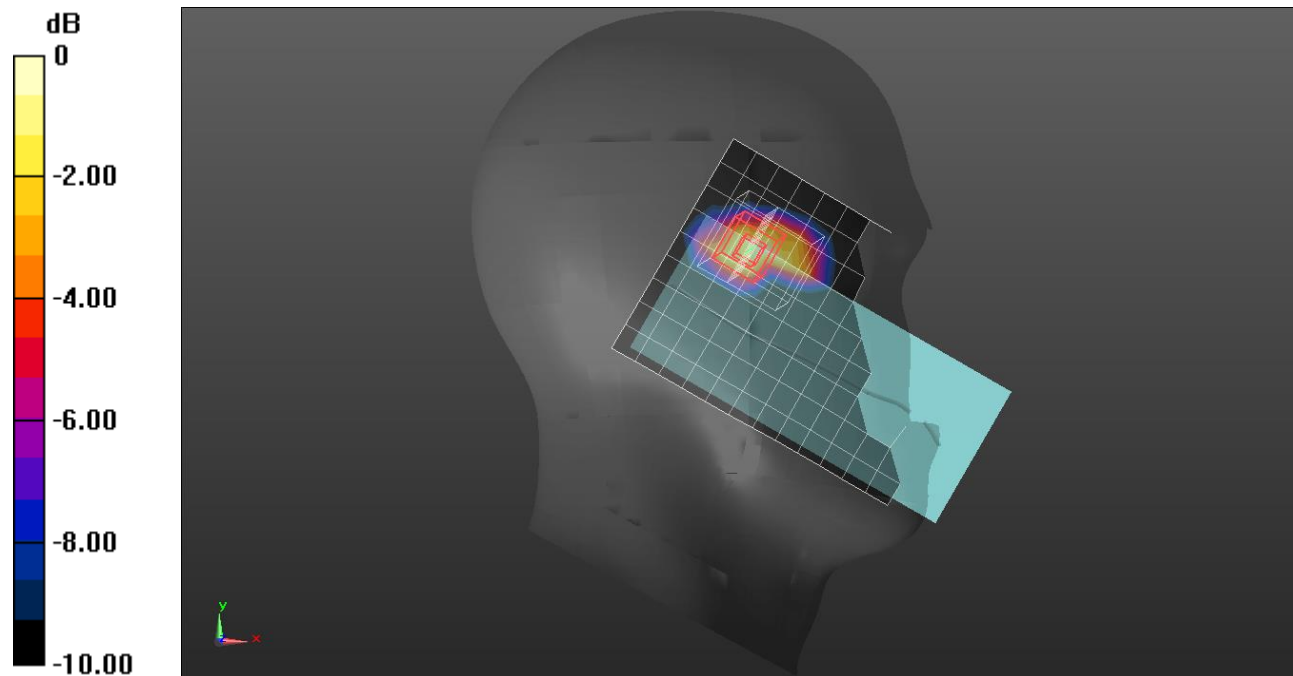

0 dB = 0.0741 W/kg = -11.30 dBW/kg

## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Rear/Bluetooth GFSK Ant.1 ch.39 10mm/Area Scan (16x9x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.146 W/kg

**Rear/Bluetooth GFSK Ant.1 ch.39 10mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 8.466 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.204 W/kg  
**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.043 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 10 mm  
 Ratio of SAR at M2 to SAR at M1 = 44.8%  
 Maximum value of SAR (measured) = 0.157 W/kg

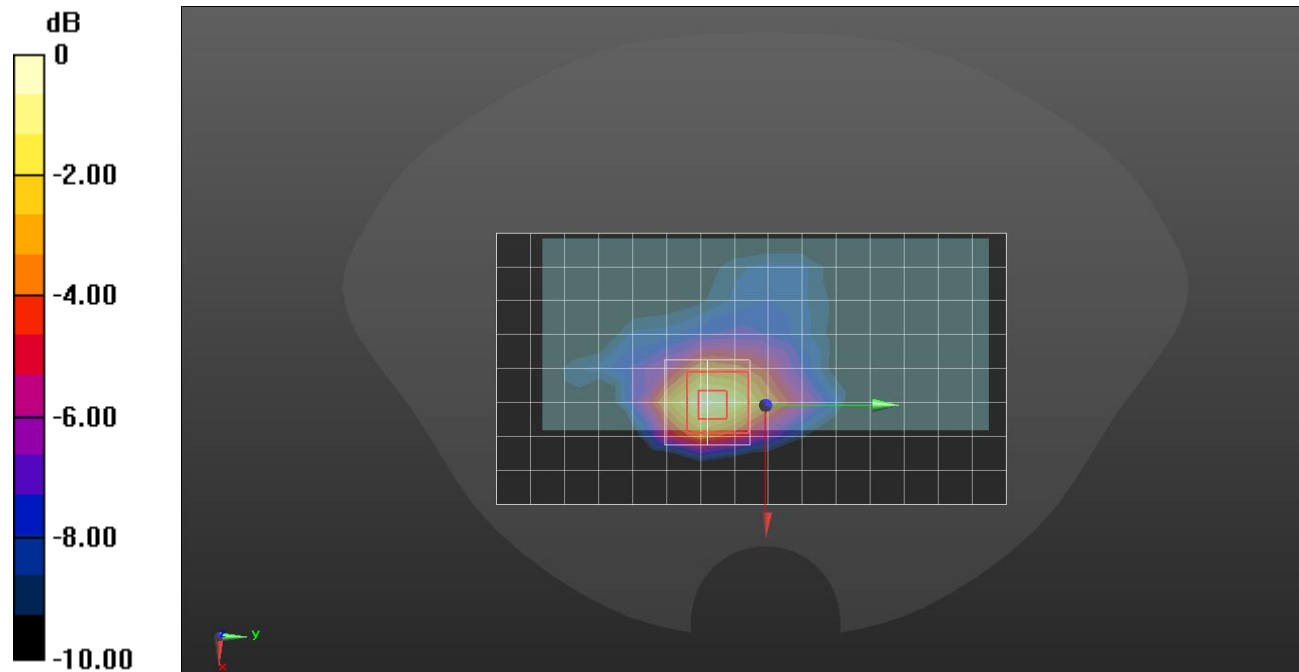

0 dB = 0.157 W/kg = -8.04 dBW/kg

## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Right/Bluetooth GFSK Ant.1 ch.39 10mm/Area Scan (16x6x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.116 W/kg

**Right/Bluetooth GFSK Ant.1 ch.39 10mm/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 9.230 V/m; Power Drift = 0.07 dB  
 Peak SAR (extrapolated) = 0.238 W/kg  
**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.046 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 7 mm  
 Ratio of SAR at M2 to SAR at M1 = 44.7%.  
 Maximum value of SAR (measured) = 0.184 W/kg

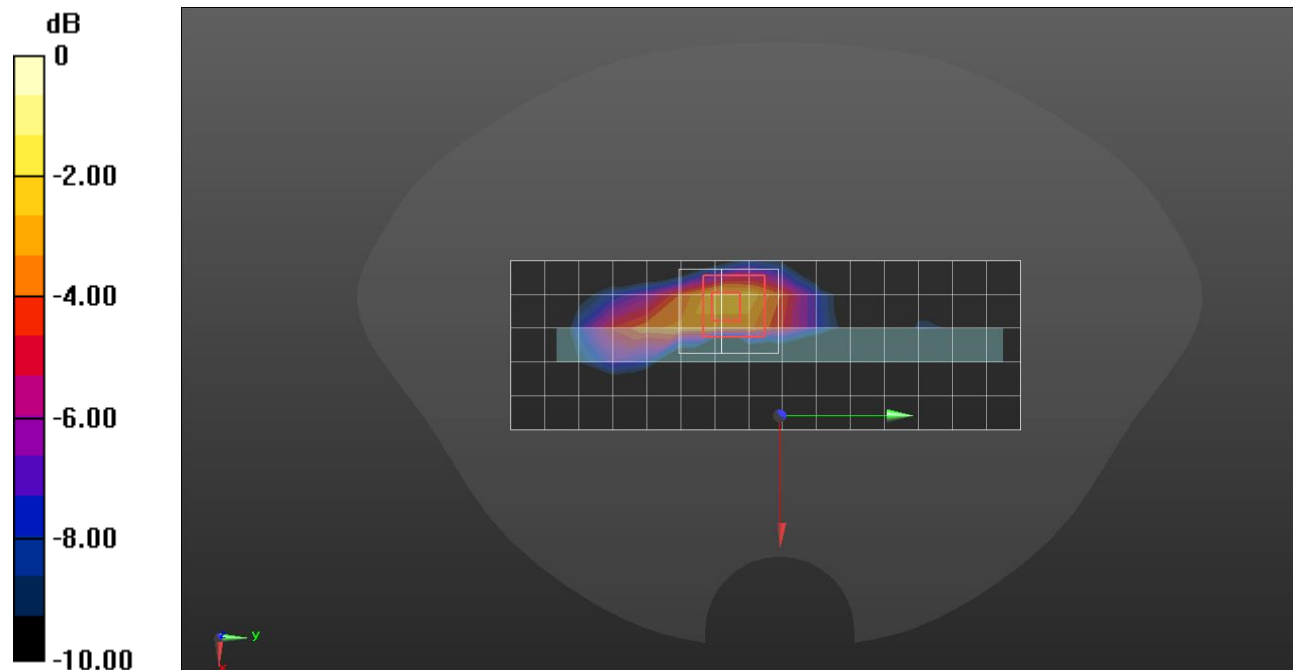

0 dB = 0.184 W/kg = -7.35 dBW/kg

## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Left Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**LHS Tilt/Bluetooth GFSK Ant 2 ch.39/Area Scan (9x19x1):** Measurement grid: dx=12mm, dy=12mm.  
 Maximum value of SAR (measured) = 0.371 W/kg

**LHS Tilt/Bluetooth GFSK Ant 2 ch.39/Zoom Scan (8x9x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 8.889 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.577 W/kg  
**SAR(1 g) = 0.230 W/kg; SAR(10 g) = 0.094 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 7 mm  
 Ratio of SAR at M2 to SAR at M1 = 39.4%  
 Maximum value of SAR (measured) = 0.444 W/kg

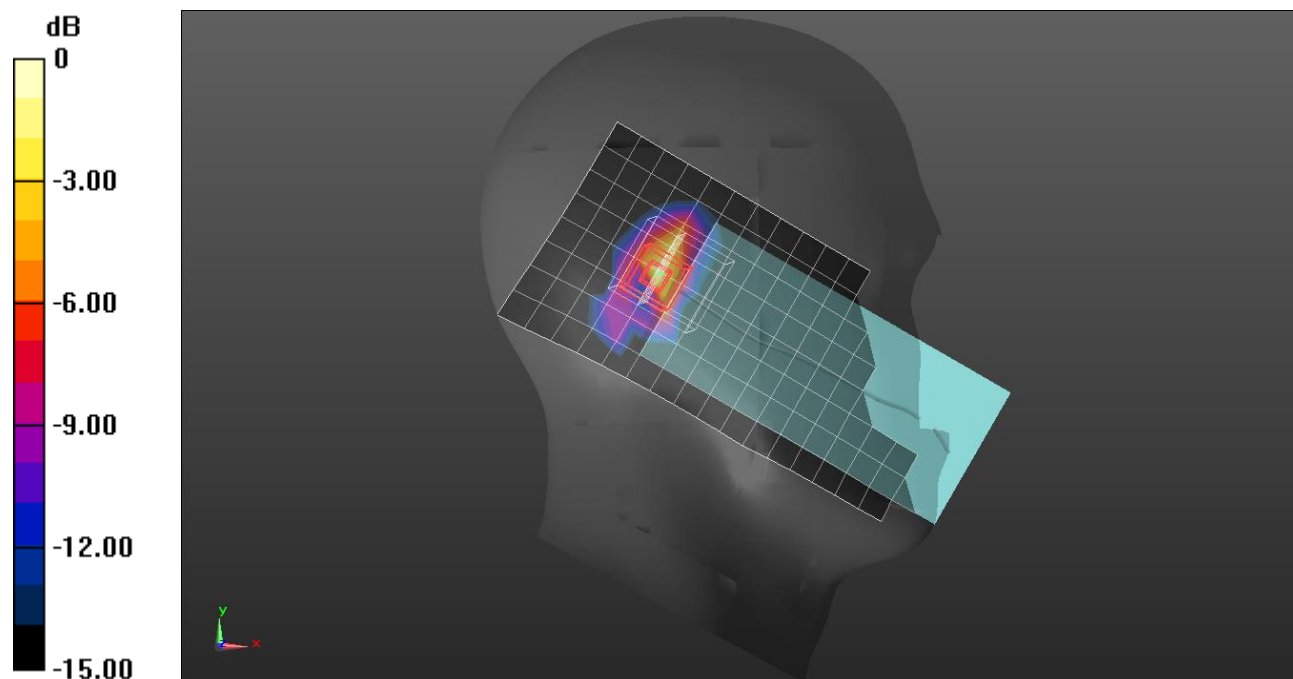

$$0 \text{ dB} = 0.444 \text{ W/kg} = -3.53 \text{ dBW/kg}$$

## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Rear/Bluetooth GFSK Ant.2 ch.39 10mm/Area Scan (17x9x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.246 W/kg

**Rear/Bluetooth GFSK Ant.2 ch.39 10mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 10.09 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.371 W/kg  
**SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.087 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 9.1 mm  
 Ratio of SAR at M2 to SAR at M1 = 49%  
 Maximum value of SAR (measured) = 0.291 W/kg

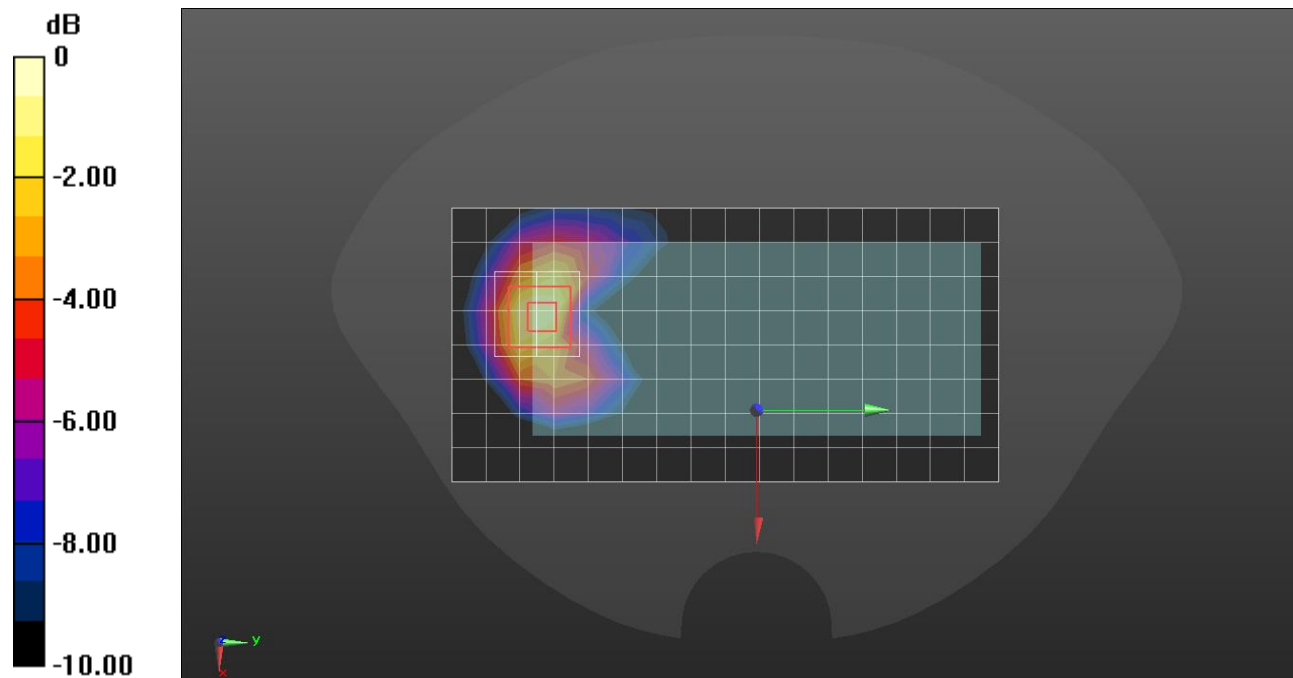

0 dB = 0.291 W/kg = -5.36 dBW/kg

## Bluetooth


Frequency: 2441 MHz; Communication System Channel Number: 39; Duty Cycle: 1:1.17625  
 Room Ambient Temperature: 23.0°C; Liquid Temperature: 22.0°C  
 Medium parameters used (interpolated):  $f = 2441$  MHz;  $\sigma = 1.828$  S/m;  $\epsilon_r = 37.746$ ;  $\rho = 1000$  kg/m<sup>3</sup>

### DASY5 Configuration:

- Area Scan Setting: Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.012W/kg
- Electronics: DAE4 Sn1494; Calibrated: 7/17/2023
- Probe: EX3DV4 - SN7651; ConvF(7.62, 7.91, 7.15) @ 2441 MHz; Calibrated: 3/18/2024
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: Twin-SAM V5.0 (Right); Phantom section: Flat Section ; Type: QD 000 P40 CD
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

**Top/Bluetooth GFSK Ant.2 ch.39 10mm/Area Scan (11x6x1):** Measurement grid: dx=12mm, dy=12mm  
 Maximum value of SAR (measured) = 0.359 W/kg

**Top/Bluetooth GFSK Ant.2 ch.39 10mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 14.38 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.679 W/kg  
**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.106 W/kg**  
 Smallest distance from peaks to all points 3 dB below = 4.5 mm  
 Ratio of SAR at M2 to SAR at M1 = 51.4%  
 Maximum value of SAR (measured) = 0.457 W/kg

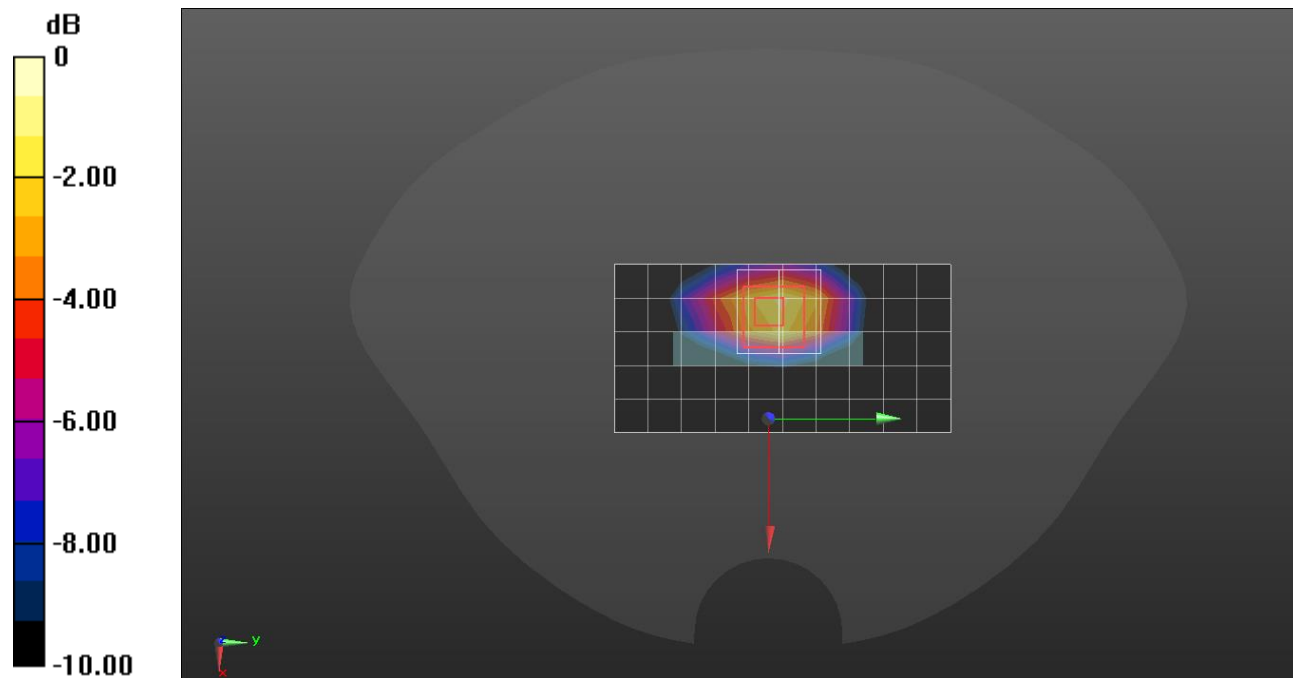

0 dB = 0.457 W/kg = -3.40 dBW/kg

Measurement Report for SM-F956D, CHEEK, ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 0 (2402.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.0	8.45	1.76	41.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.070	0.070
psSAR10g [W/Kg]	0.035	0.034
Power Drift [dB]		0.18
M2/M1 [%]		80.7
Dist 3dB Peak [mm]		9.1

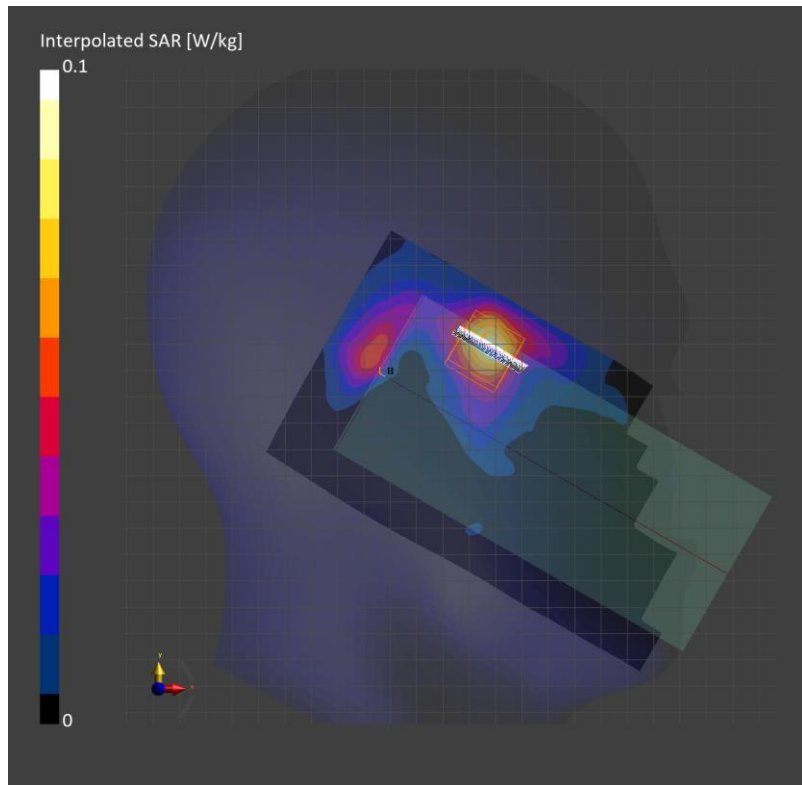

Measurement Report for SM-F956D, BACK, ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 0 (2402.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.0	8.45	1.76	41.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.076	0.084
psSAR10g [W/Kg]	0.038	0.038
Power Drift [dB]		0.06
M2/M1 [%]		80.4
Dist 3dB Peak [mm]		9.0

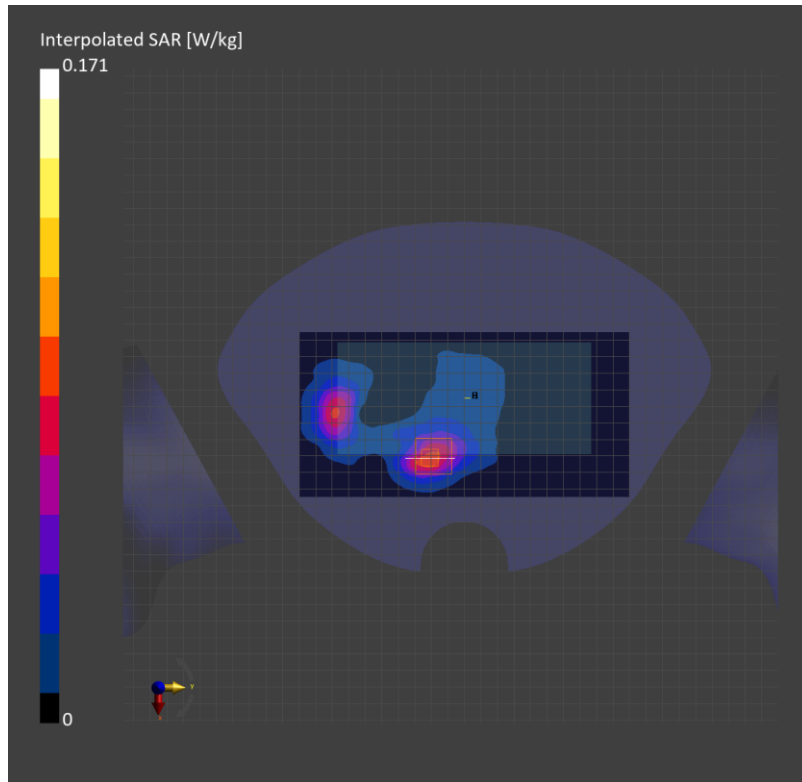



Measurement Report for SM-F956D, EDGE RIGHT, ISM 2.4 GHz Band, IEEE 802.15.1 Bluetooth (GFSK, DH5), Channel 0 (2402.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE RIGHT, 10.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.0	8.45	1.76	41.0

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1877	HBBL-600-10000	EX3DV4 - SN7330, 2024-01-22	DAE4 Sn1667, 2024-03-14

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	10.0 x 10.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.081	0.086
psSAR10g [W/Kg]	0.039	0.040
Power Drift [dB]		0.01
M2/M1 [%]		79.3
Dist 3dB Peak [mm]		8.0

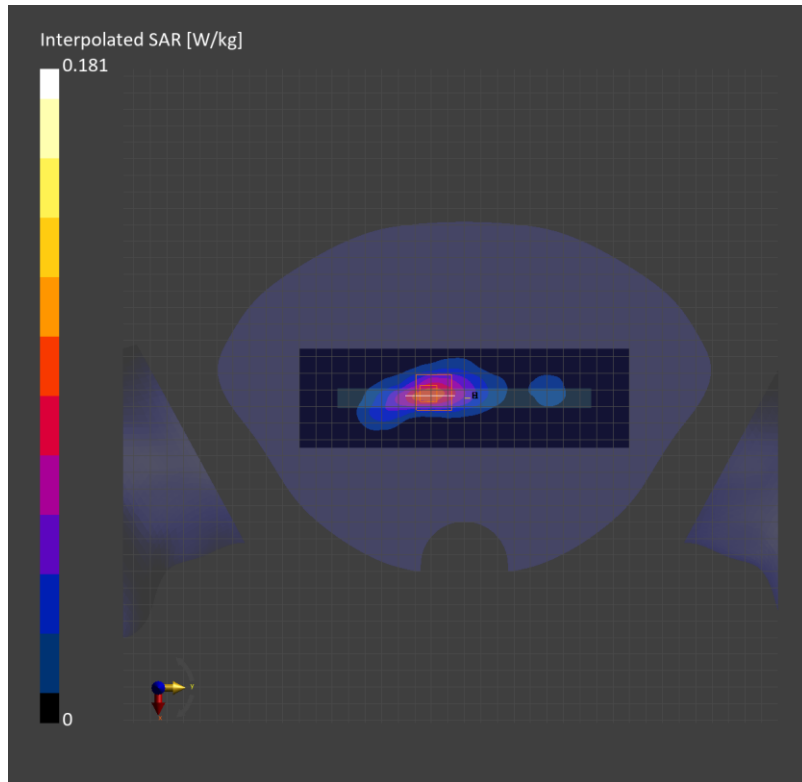

Measurement Report for SM-F956D, BACK, Custom Band, CW, Channel 13600 (13.6 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 0--	13.6	16.85	0.799	53.4

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
ELI V6.0 (20deg probe tilt) - 2005	HBBL-600-10000	EX3DV4 - SN7646, 2024-03-15	DAE4 Sn912, 2023-11-17

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.028	0.028
psSAR10g [W/Kg]	0.018	0.011
Power Drift [dB]		-0.19
M2/M1 [%]		60.5
Dist 3dB Peak [mm]		6.0

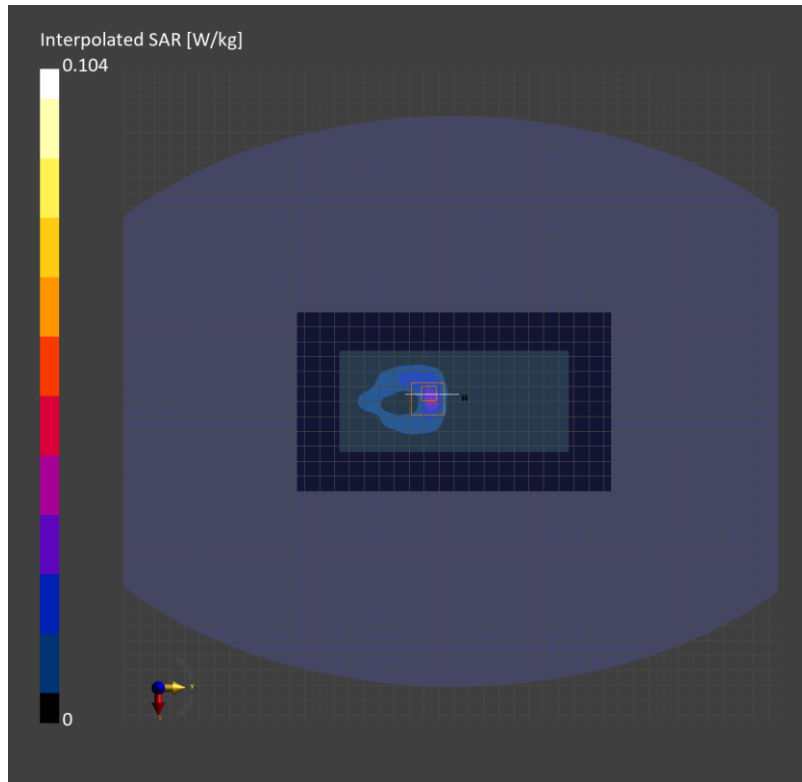

Measurement Report for SM-F956D, TILT, Band n66, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz), Channel 349000 (1745.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	TILT, 0.00	Band n66	5G NR FR1 FDD, 10942-AAC	1745.0	7.68	1.34	39.4

Hardware Setup


Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.485	0.508
psSAR10g [W/Kg]	0.284	0.273
Power Drift [dB]		-0.03
M2/M1 [%]		85.6
Dist 3dB Peak [mm]		9.7

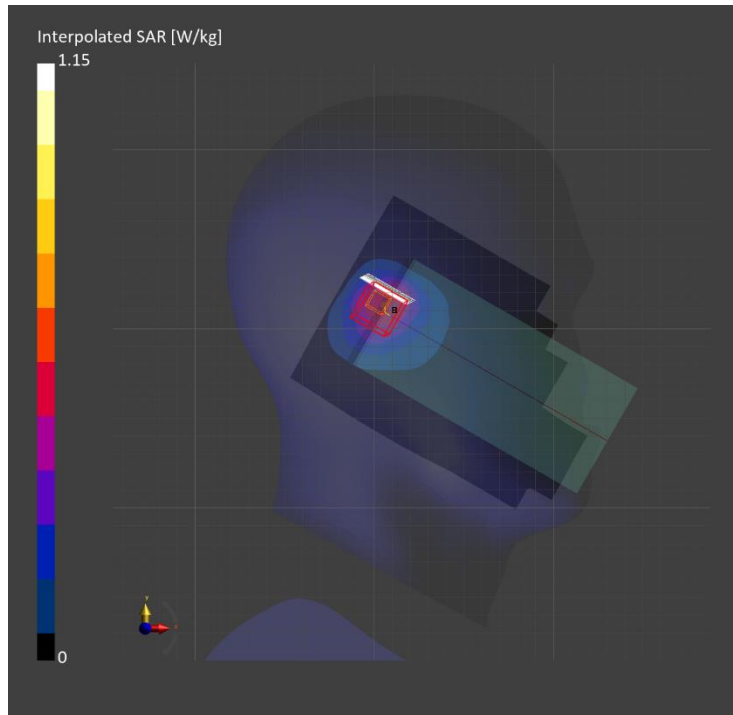

Measurement Report for SM-F956D, EDGE TOP, Band n66, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz), Channel 349000 (1745.0 MHz)

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz]	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band n66	5G NR FR1 FDD, 10942-AAC	1745.0	7.68	1.34	39.4

Hardware Setup

Phantom	TSL (Tissue Simulating Liquid)	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2038	HBBL-600-10000	EX3DV4 - SN7645, 2023-09-20	DAE4 Sn1671, 2024-04-18

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	47.6 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	11.91 x 15.0	5.5 x 5.5 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR1g [W/Kg]	0.568	0.559
psSAR10g [W/Kg]	0.308	0.281
Power Drift [dB]		0.18
M2/M1 [%]		77.2
Dist 3dB Peak [mm]		7.1

