



FCC CFR47 PART 15 SUBPART C

Bluetooth Low Energy

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + Bluetooth/BLE, DTS b/g/n and ANT+

MODEL NUMBER : SM-G1600

FCC ID: A3LSMG1600

REPORT NUMBER: 16K23557-E2V2

ISSUE DATE: JUN 28, 2016

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	06/20/16	Initial issue	Junwhan Lee
V2	06/28/16	Revised section 5.4	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	6
4.2. <i>SAMPLE CALCULATION</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>MAXIMUM OUTPUT POWER</i>	8
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	8
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	8
5.5. <i>DESCRIPTION OF TEST SETUP</i>	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS	12
8.1. <i>ON TIME AND DUTY CYCLE RESULTS</i>	12
9. SUMMARY TABLE	13
10. ANTENNA PORT TEST RESULTS	14
10.1. <i>6 dB BANDWIDTH</i>	14
10.2. <i>99% BANDWIDTH</i>	16
10.3. <i>OUTPUT POWER</i>	18
10.4. <i>AVERAGE POWER</i>	20
10.5. <i>PSD</i>	21
10.6. <i>CONDUCTED SPURIOUS EMISSIONS</i>	23
11. RADIATED TEST RESULTS	27
11.1. <i>LIMITS AND PROCEDURE</i>	27
11.2. <i>TRANSMITTER ABOVE 1 GHz</i>	29
11.3. <i>WORST-CASE BELOW 1 GHz</i>	39

12. AC POWER LINE CONDUCTED EMISSIONS	41
13. SETUP PHOTOS.....	46

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth/BLE, DTS b/g/n and ANT+
MODEL NUMBER: SM-G1600
SERIAL NUMBER: R38H50RX02E (RADIATED);
R38H50RX09F (CONDUCTED)
DATE TESTED: JUN 03, 2016 - JUN 15, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



CY Choi
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Chamber 1
<input checked="" type="checkbox"/> Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth/BLE, DTS b/g/n and ANT+. This test report addresses the DTS (BLE) operational mode.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	BLE	Peak	2.17	1.65
		Average	1.34	1.36

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -3.61 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

Also, Test results of flip cover open configuration were more worst cases in comparison with test results of flip cover closed configuration. Therefore, all radiated and power line conducted tests were conducted in the condition of flip cover open configuration.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	ETA0U83CBC	DK2H506HS/A	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS64UCFBE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	1	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable BLE mode.

SETUP DIAGRAM FOR TESTS

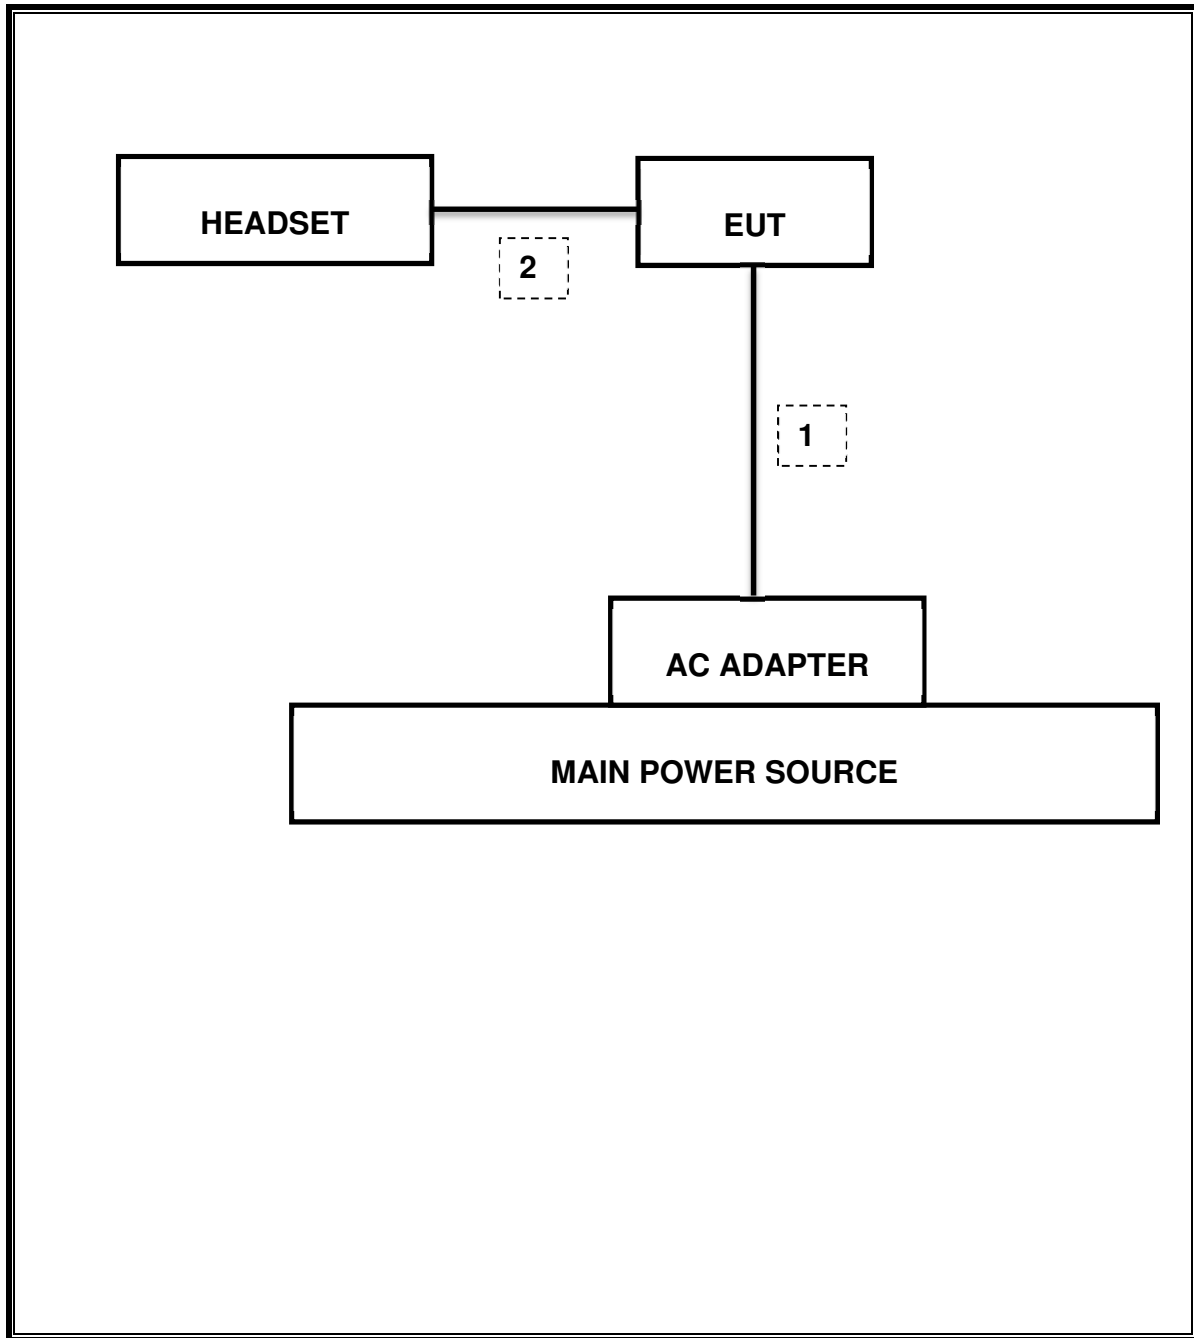

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	11-17-16
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	09-20-16
Antenna, Horn, 18 GHz	ETS	3115	00161451	05-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-18-16
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-18-16
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-18-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-19-16
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-19-16
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-16
Average Power Sensor	R&S	NRZ-Z91	102681	08-18-16
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-18-16
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-19-16
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-19-16
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-19-16
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	009	08-18-16
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	015	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	009	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	010	08-18-16
High Pass Filter 5GHz	Micro-Tronics	HPS17542	016	08-18-16
High Pass Filter 6GHz	Micro-Tronics	HPM17543	015	08-18-16
LISN	R&S	ENV-216	101836	08-19-16
LISN	R&S	ENV-216	101837	08-19-16

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r05: Measurement Procedure §9.1.1 is used for peak power and §10.2 PKPSD is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.


8. ON TIME, DUTY CYCLE AND MEASUREMENT METHODS

LIMITS

None: for reporting purposes only.

8.1. ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
2400MHz Bands						
BLE	0.390	0.626	0.622	62.2%	2.06	2.567

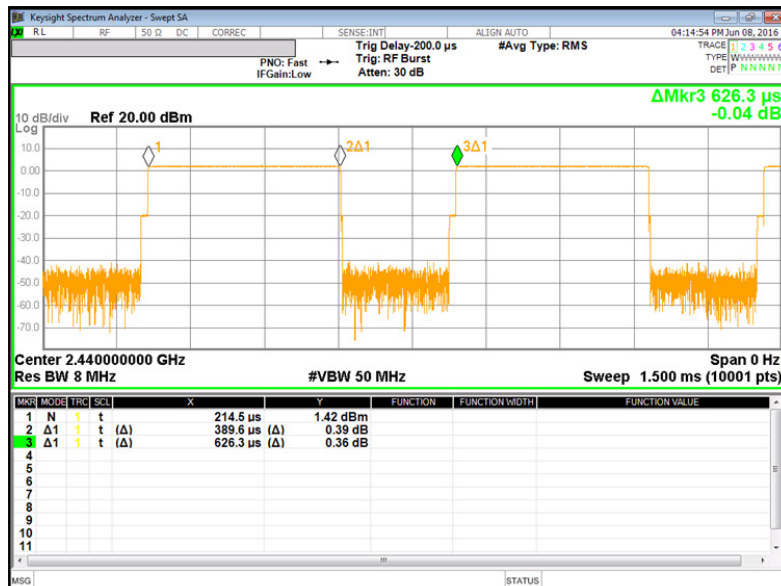

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	682.0 kHz
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-49.497 dBm
15.247	TX conducted output power	<30dBm		Pass	2.173 dBm (Peak)
15.247	PSD	<8dBm		Pass	-13.4 dBm (Peak)
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	38.13 dBuV (PK)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	50.52 dBuV/m (PK)

10. ANTENNA PORT TEST RESULTS

10.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency [MHz]	6 dB Bandwidth [kHz]	Minimum Limit [kHz]
Low	2402	689.3	500.0
Mid	2440	682.0	500.0
High	2480	688.5	500.0
Worst		682.0	500.0

6 dB BANDWIDTH PLOTS

<p>Low CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.402 008 175 GHz 0.466 dBm -6.00 dB 689.317 kHz Center 2.4020000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.333 ms (20001 pts)</p>
<p>Middle CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.440 008 250 GHz 1.640 dBm -6.00 dB 681.986 kHz Center 2.4400000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.333 ms (20001 pts)</p>
<p>High CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.480 007 950 GHz -0.227 dBm -6.00 dB 688.500 kHz Center 2.4800000 GHz #Res BW 100 kHz #VBW 300 kHz Sweep 1.333 ms (20001 pts)</p>

10.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency [MHz]	99% Bandwidth [MHz]
Low	2402	1.063
Mid	2440	1.060
High	2480	1.069
Worst		1.069

99% BANDWIDTH PLOTS

<p>Low CH</p>	<p>Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 300 kHz Span 3 MHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>-1.47 dBm</td> </tr> <tr> <td>1.0632 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>13.819 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>1.248 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	-1.47 dBm	1.0632 MHz			Transmit Freq Error	OBW Power	99.00 %	13.819 kHz			x dB Bandwidth	x dB	-26.00 dB	1.248 MHz		
Occupied Bandwidth	Total Power	-1.47 dBm																	
1.0632 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
13.819 kHz																			
x dB Bandwidth	x dB	-26.00 dB																	
1.248 MHz																			
<p>Middle CH</p>	<p>Center Freq: 2.44000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.44 GHz #Res BW 30 kHz #VBW 300 kHz Span 3 MHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>-0.78 dBm</td> </tr> <tr> <td>1.0598 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>11.696 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>1.266 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	-0.78 dBm	1.0598 MHz			Transmit Freq Error	OBW Power	99.00 %	11.696 kHz			x dB Bandwidth	x dB	-26.00 dB	1.266 MHz		
Occupied Bandwidth	Total Power	-0.78 dBm																	
1.0598 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
11.696 kHz																			
x dB Bandwidth	x dB	-26.00 dB																	
1.266 MHz																			
<p>High CH</p>	<p>Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Radio Std: None Radio Device: BTS</p> <p>10 dB/div Ref 20.00 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 300 kHz Span 3 MHz #Sweep 100 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>-1.74 dBm</td> </tr> <tr> <td>1.0690 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>8.598 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-26.00 dB</td> </tr> <tr> <td>1.299 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	-1.74 dBm	1.0690 MHz			Transmit Freq Error	OBW Power	99.00 %	8.598 kHz			x dB Bandwidth	x dB	-26.00 dB	1.299 MHz		
Occupied Bandwidth	Total Power	-1.74 dBm																	
1.0690 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
8.598 kHz																			
x dB Bandwidth	x dB	-26.00 dB																	
1.299 MHz																			

10.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r05 under section 9.1.1 utilizing spectrum analyzer.

RESULTS

Channel	Frequency [MHz]	Peak Power Reading [dBm]	Limit [dBm]	Margin [dB]
Low	2402	1.094	30.000	-28.906
Mid	2440	2.173	30.000	-27.827
High	2480	0.194	30.000	-29.806
Worst		2.173		-27.827

OUTPUT POWER PLOTS

<p>Low CH</p>	<p>Key parameters for Low CH plot: Center: 2.40200 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Span: 10.00 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.401 981 0 GHz, 1.094 dBm</p>
<p>Middle CH</p>	<p>Key parameters for Middle CH plot: Center: 2.44000 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Span: 10.00 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.440 015 0 GHz, 2.173 dBm</p>
<p>High CH</p>	<p>Key parameters for High CH plot: Center: 2.48000 GHz #Res BW: 3.0 MHz #VBW: 50 MHz Span: 10.00 MHz Sweep: 1.333 ms (20001 pts) Mkr1: 2.480 022 0 GHz, 0.194 dBm</p>

10.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 10.1 dB (including 10 dB pad and 0.1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	0.67	1.17
Middle	2440	1.34	1.36
High	2480	-0.06	0.99

10.5. PSD

LIMITS

FCC §15.247

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r05

RESULTS

Channel	Frequency [MHz]	PSD [dBm]	Limit [dBm]	Margin [dB]
Low	2402	-14.37	8.00	-22.37
Mid	2440	-13.40	8.00	-21.40
High	2480	-14.84	8.00	-22.84

POWER SPECTRAL DENSITY PLOTS

<p>Low CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 10.00 dBm Mkr1 2.401 977 99 GHz -14.370 dBm Center 2.4020000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.595 MHz Sweep 50.67 ms (20001 pts)</p>
<p>Middle CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 10.00 dBm Mkr1 2.439 978 14 GHz -13.404 dBm Center 2.4400000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.590 MHz Sweep 50.67 ms (20001 pts)</p>
<p>High CH</p>	<p>Keyight Spectrum Analyzer - Swept SA Ref 10.00 dBm Mkr1 2.479 978 03 GHz -14.841 dBm Center 2.4800000 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 1.604 MHz Sweep 52.00 ms (20001 pts)</p>

10.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


BANDEDGE & SPURIOUS EMISSIONS, LOW CHANNEL

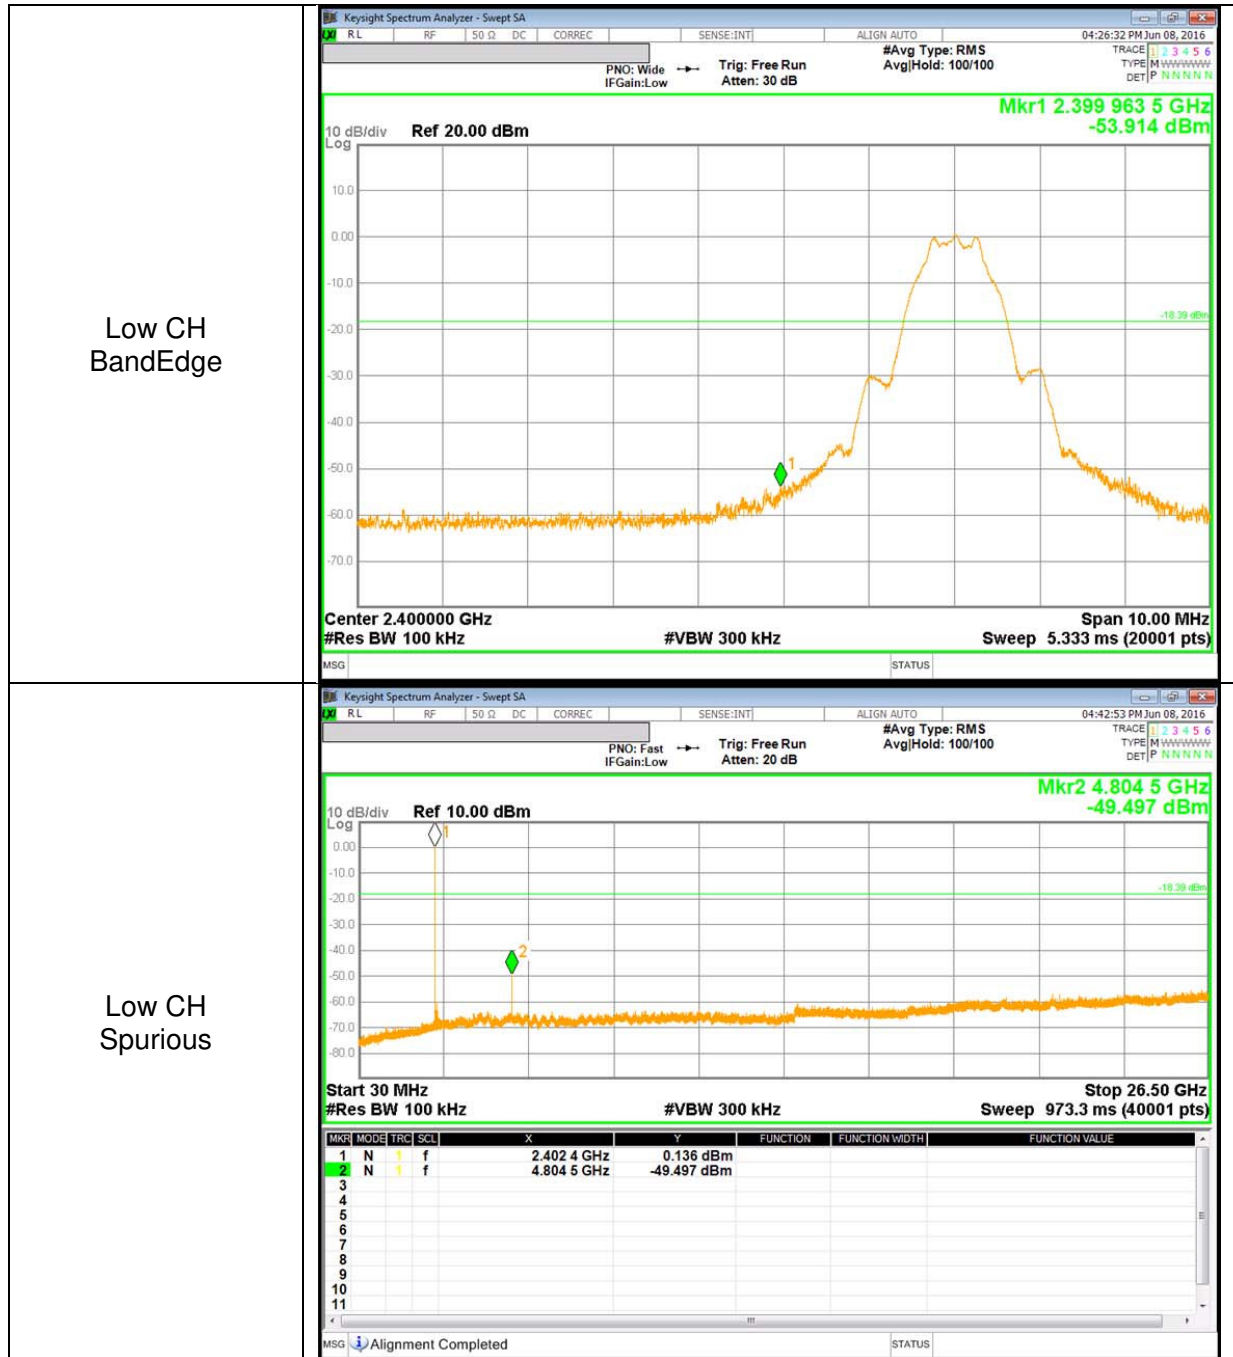

SPURIOUS EMISSIONS, MID CHANNEL

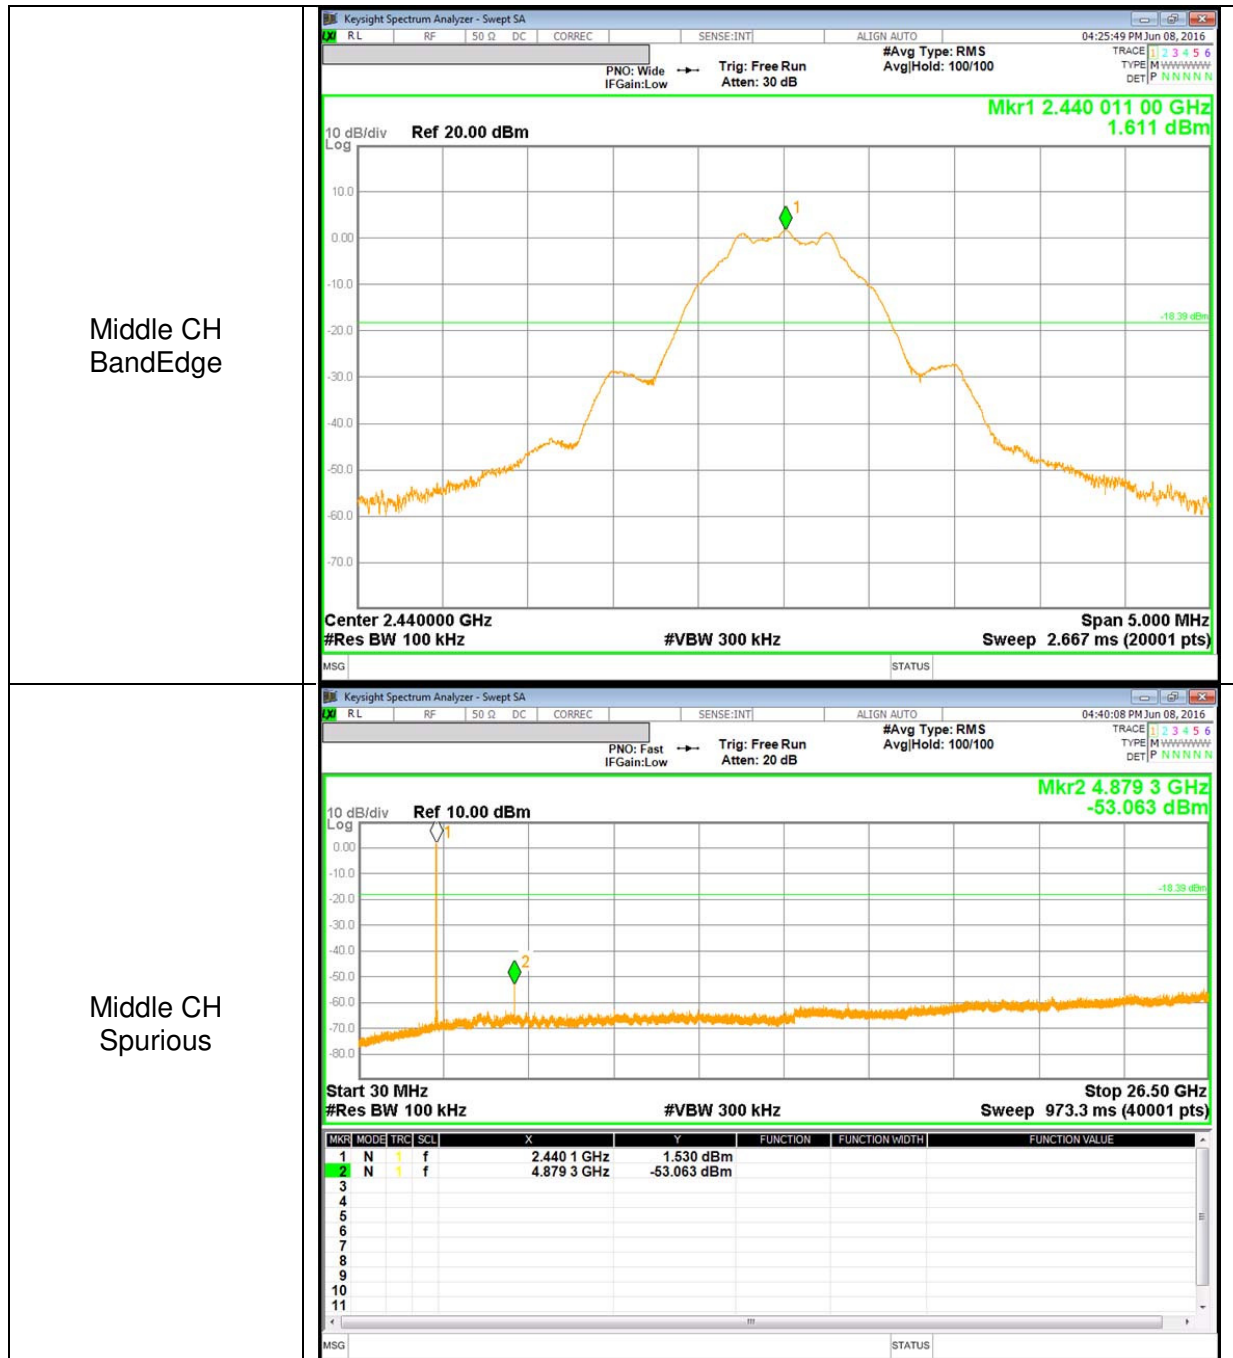

SPURIOUS EMISSIONS, HIGH CHANNEL

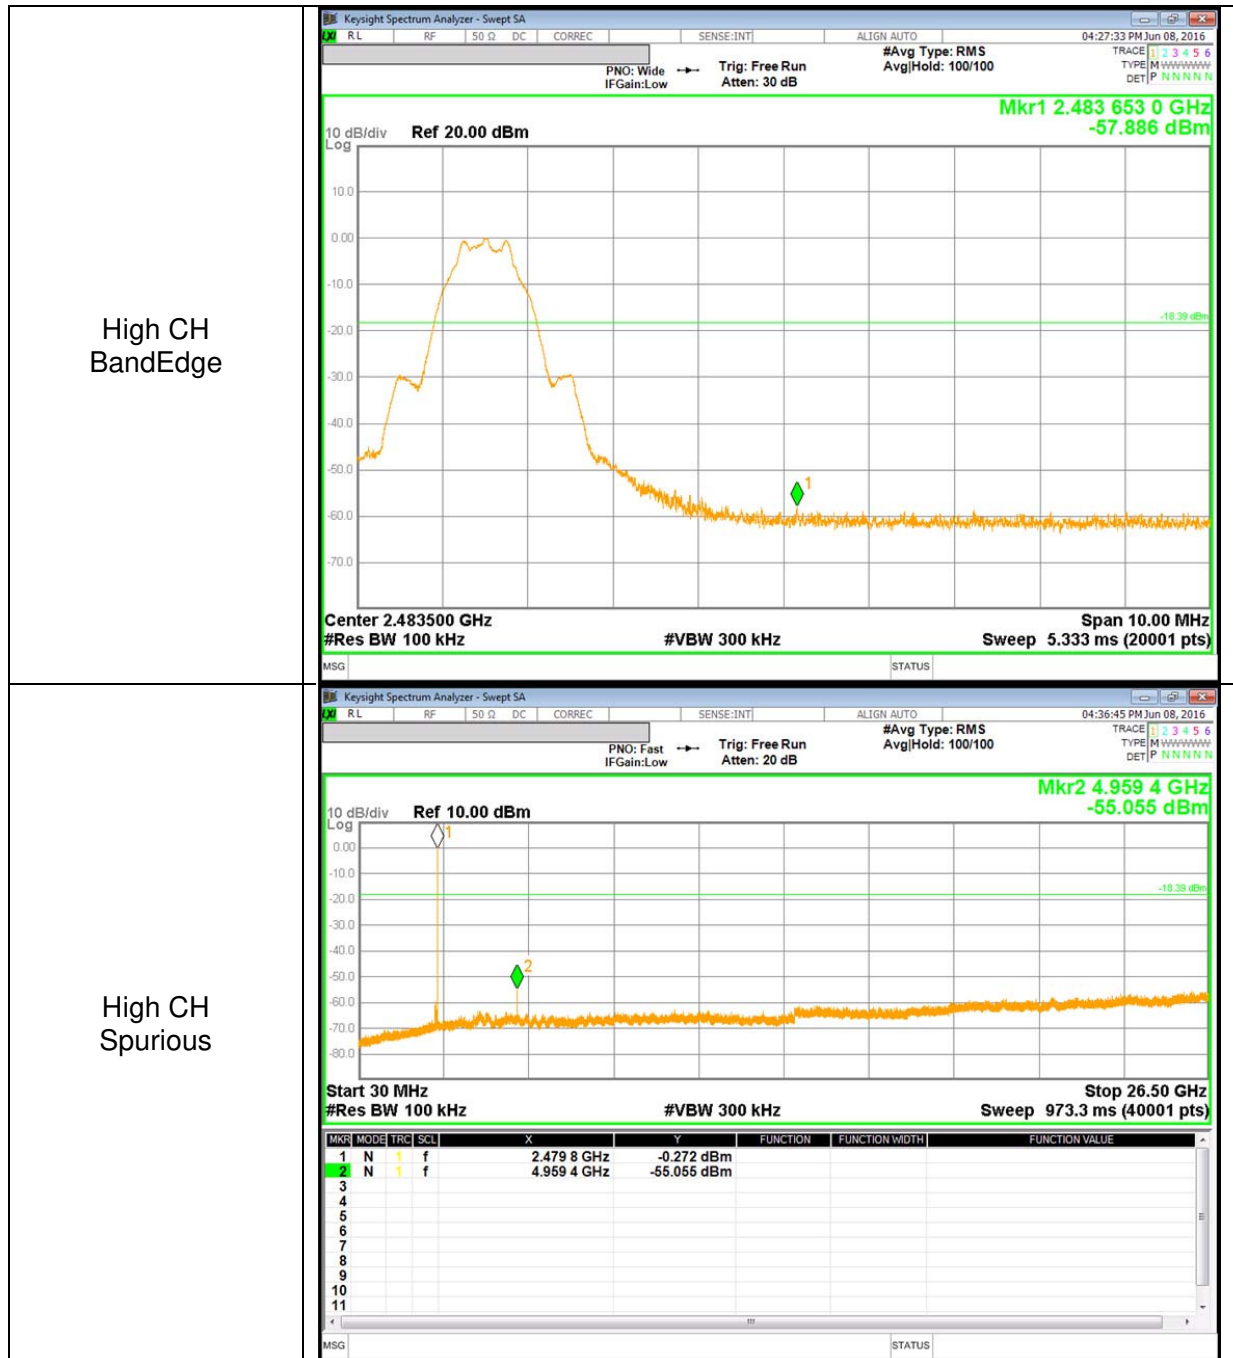

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log (1/x)$. For this sample: DCF = $10 \log (1/0.622) = 2.06 \text{ dB}$ (Spectrum Analyzer round it up to 2.06dB)

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Formula for converting the filed strength from uV/m to dBuV/m is:
Limit (dBuV/m) = $20 \log \text{limit (uV/m)}$

11.2. TRANSMITTER ABOVE 1 GHz RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

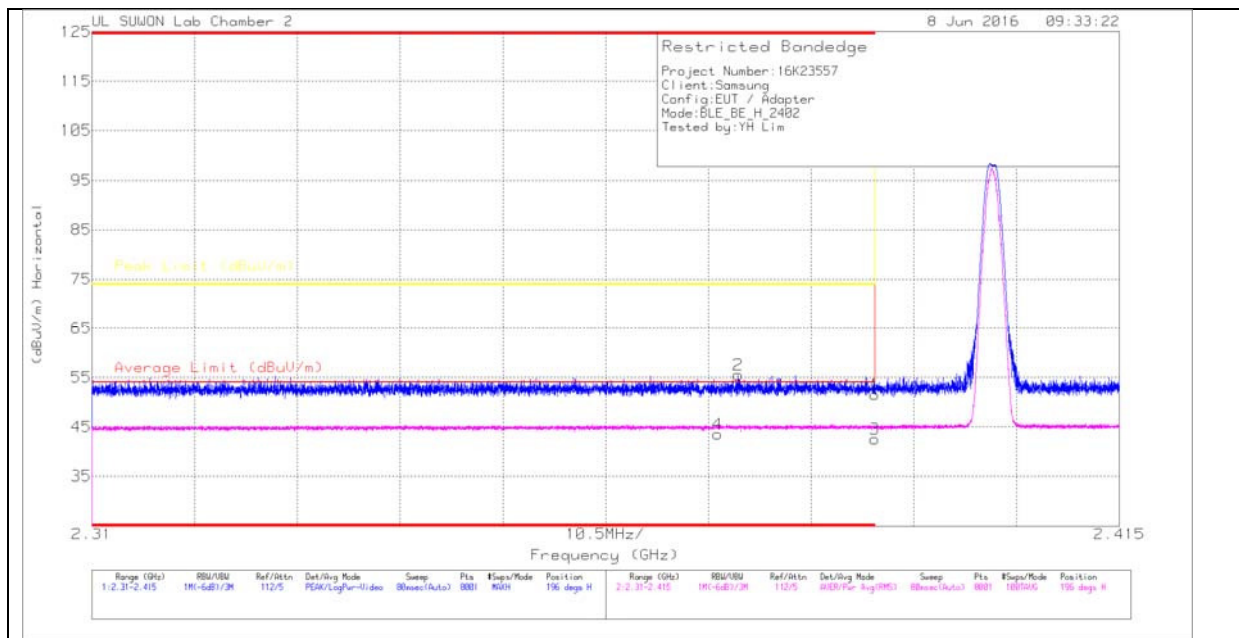

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.41	Pk	31.7	-19.5	0	51.61	-	-	74	-22.39	196	396	H
2	* 2.376	43.41	Pk	31.7	-19.6	0	55.51	-	-	74	-18.49	196	396	H
3	* 2.39	30.38	RMS	31.7	-19.5	2.06	44.64	54	-9.36	-	-	196	396	H
4	* 2.374	31.47	RMS	31.7	-19.6	2.06	45.63	54	-8.37	-	-	196	396	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

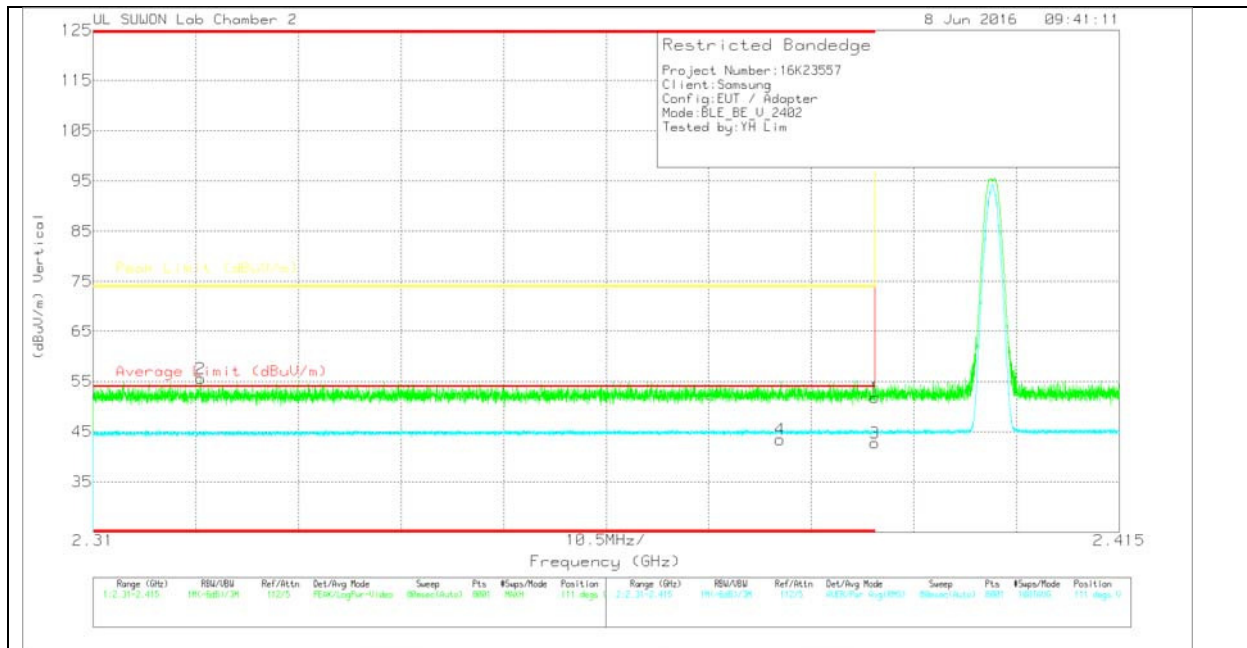

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.56	Pk	31.7	-19.5	0	51.76	-	-	74	-22.24	111	396	V
2	* 2.321	43.62	Pk	31.6	-19.7	0	55.52	-	-	74	-18.48	111	396	V
3	* 2.39	30.54	RMS	31.7	-19.5	2.06	44.8	54	-9.2	-	-	111	396	V
4	* 2.38	31.24	RMS	31.7	-19.5	2.06	45.5	54	-8.5	-	-	111	396	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

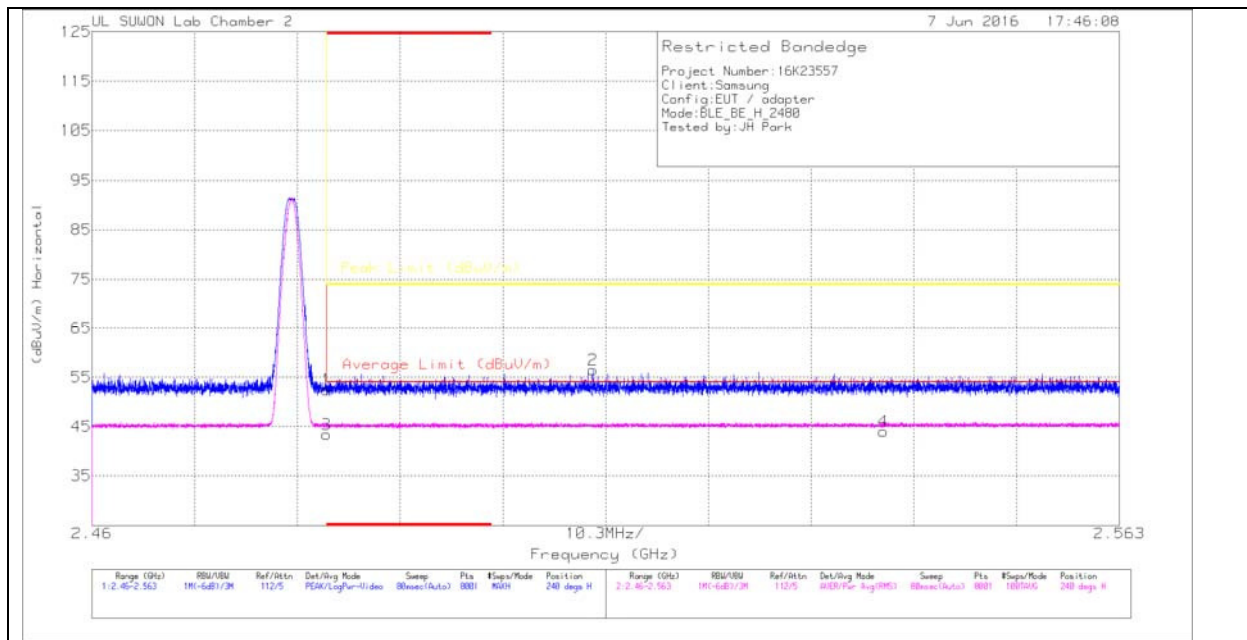

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.09	Pk	31.8	-19.4	0	52.49	-	-	74	-21.51	240	131	H
2	2.51	43.93	Pk	31.9	-19.3	0	56.53	-	-	74	-17.47	240	131	H
3	* 2.484	31.03	RMS	31.8	-19.4	2.06	45.49	54	-8.51	-	-	240	131	H
4	2.539	31.44	RMS	31.9	-19.3	2.06	46.1	54	-7.9	-	-	240	131	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

RMS - RMS detection

VERTICAL PEAK AND AVERAGE PLOT

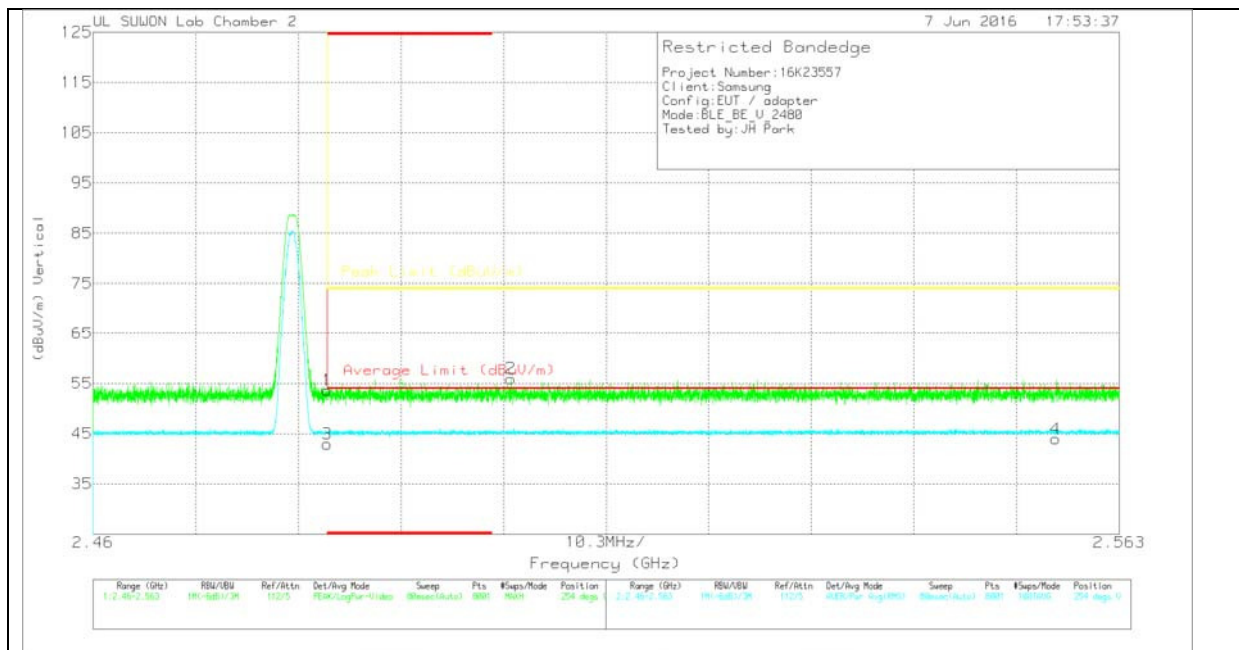

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117/001687 24_150619	Path_2_10dB	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.22	Pk	31.8	-19.4	0	53.62	-	-	74	-20.38	254	105	V
2	2.502	43.37	Pk	31.9	-19.3	0	55.97	-	-	74	-18.03	254	105	V
3	* 2.484	30.55	RMS	31.8	-19.4	2.06	45.01	54	-8.99	-	-	254	105	V
4	2.557	31.38	RMS	31.9	-19.3	2.06	46.04	54	-7.96	-	-	254	105	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


RMS - RMS detection

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

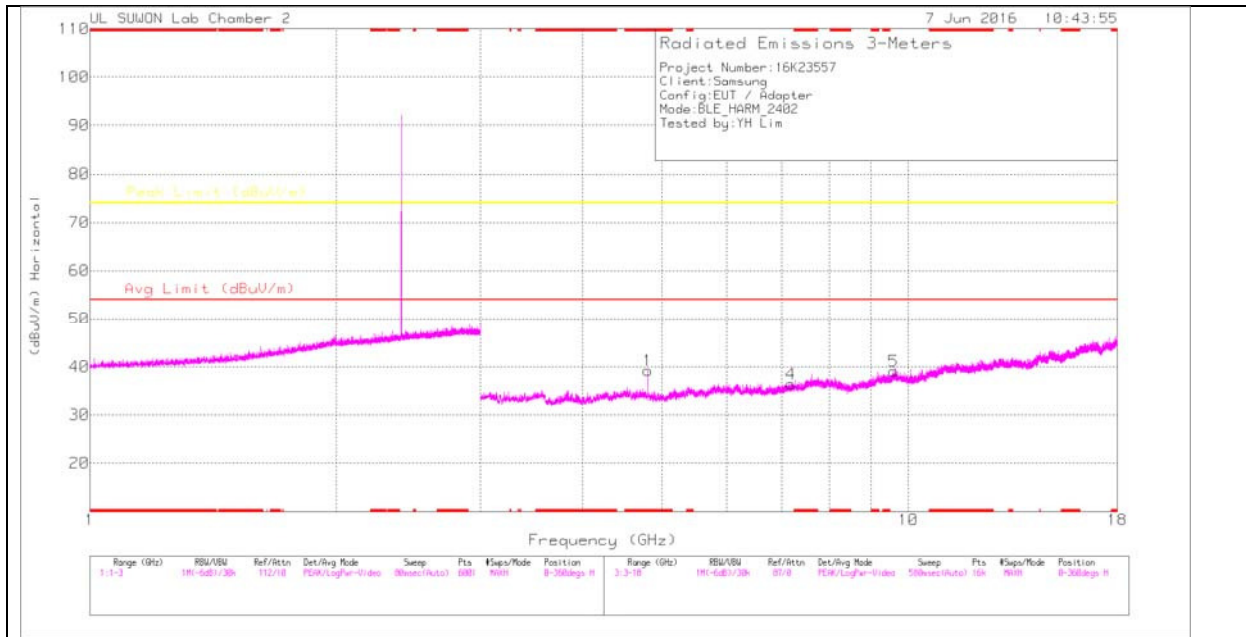

LOW CHANNEL VERTICAL

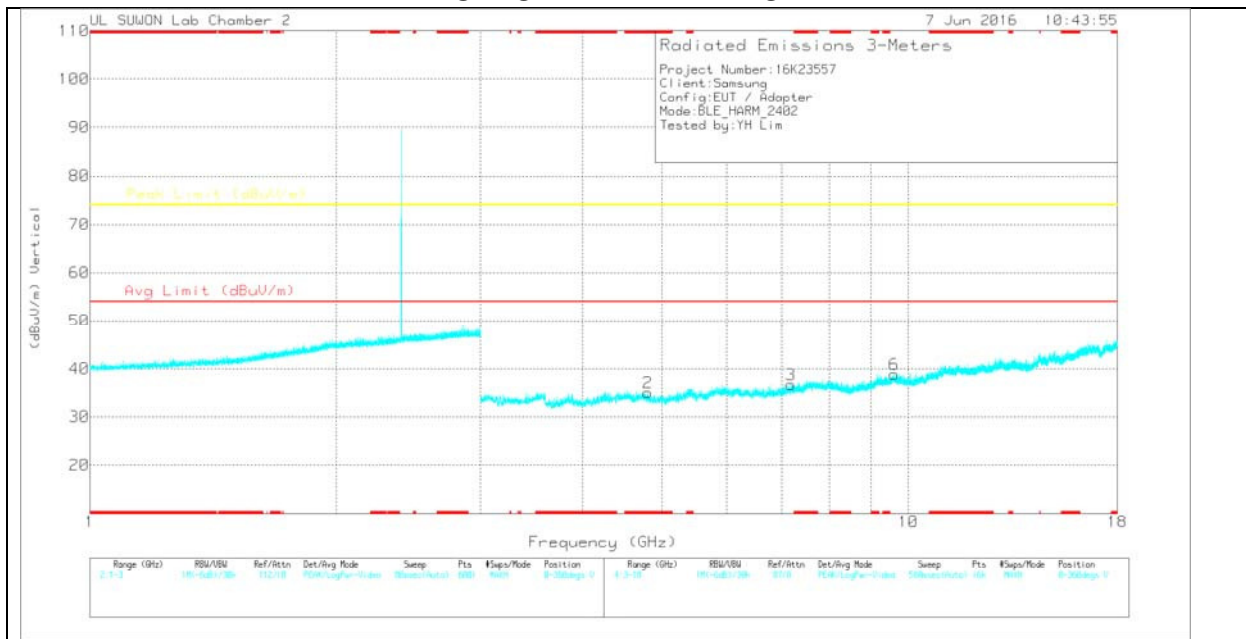

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.803	30.65	PK	33.9	-25.3	0	39.25	-	-	74	-34.75	0-360	100	H
4	7.184	23.53	PK	35.7	-22.8	0	36.43	-	-	74	-37.57	0-360	200	H
5	9.591	21.45	PK	36.9	-19.2	0	39.15	-	-	74	-34.85	0-360	200	H
2	* 4.804	26.41	PK	33.9	-25.3	0	35.01	-	-	74	-38.99	0-360	200	V
3	7.183	23.81	PK	35.7	-22.8	0	36.71	-	-	74	-37.29	0-360	200	V
6	9.611	20.99	PK	36.9	-19.1	0	38.79	-	-	74	-35.21	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001 68724)_1 50619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	38.41	PK2	33.9	-25.3	0	47.01	-	-	74	-26.99	210	114	H
* 4.804	25.59	MAv1	33.9	-25.3	2.06	36.25	54	-17.75	-	-	210	114	H
* 4.803	36.49	PK2	33.9	-25.3	0	45.09	-	-	74	-28.91	183	103	V
* 4.804	24.68	MAv1	33.9	-25.3	2.06	35.34	54	-18.66	-	-	183	103	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

MID CHANNEL HORIZONTAL

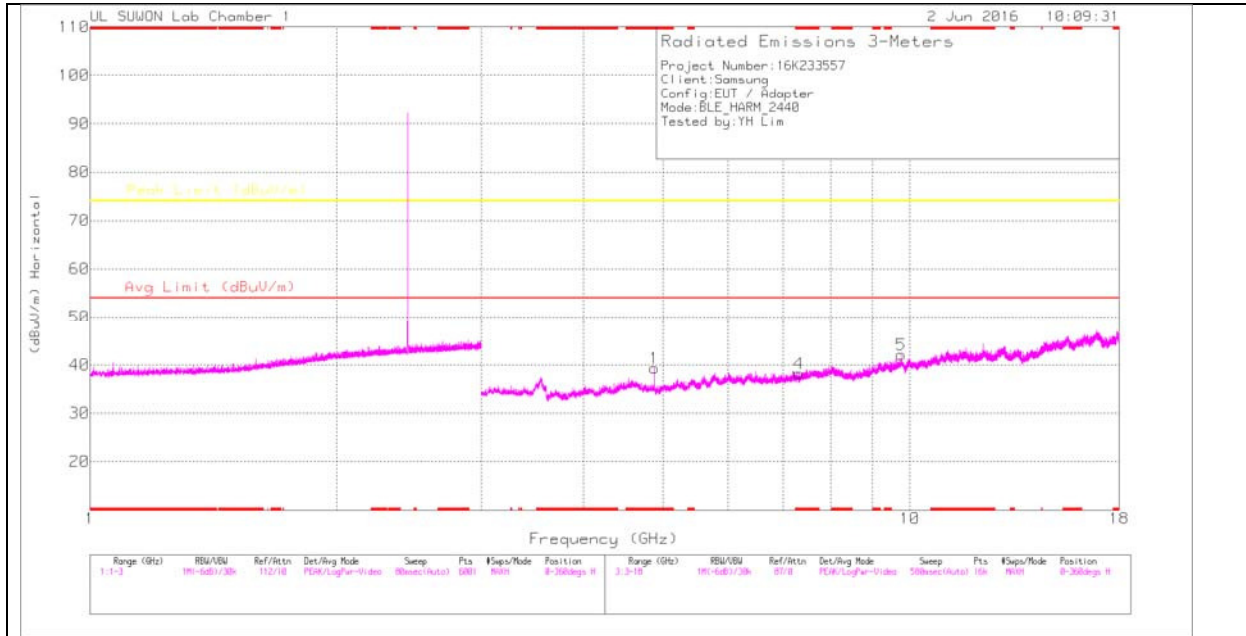

MID CHANNEL VERTICAL

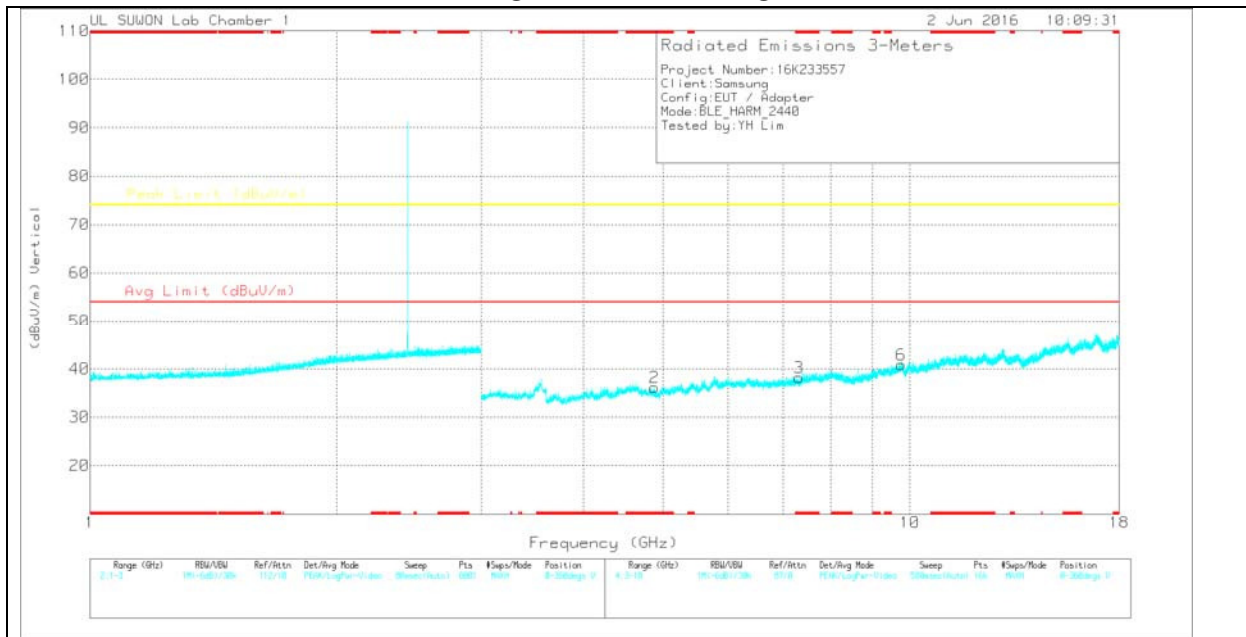

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 17)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	39.32	PK	34	-34	0	39.32	-	-	74	-34.68	0-360	200	H
4	* 7.321	33.27	PK	35.8	-30.9	0	38.17	-	-	74	-35.83	0-360	100	H
5	9.76	31.57	PK	37.2	-26.6	0	42.17	-	-	74	-31.83	0-360	200	H
2	* 4.881	36.21	PK	34	-34	0	36.21	-	-	74	-37.79	0-360	100	V
3	* 7.322	33.28	PK	35.8	-30.9	0	38.18	-	-	74	-35.82	0-360	200	V
6	9.76	30.22	PK	37.2	-26.6	0	40.82	-	-	74	-33.18	0-360	200	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001 68717)_1 50619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88	48.38	PK2	34	-34	0	48.38	-	-	74	-25.62	210	125	H
* 4.88	38.51	MAv1	34	-34	2.06	40.57	54	-13.43	-	-	210	125	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average

HIGH CHANNEL HORIZONTAL

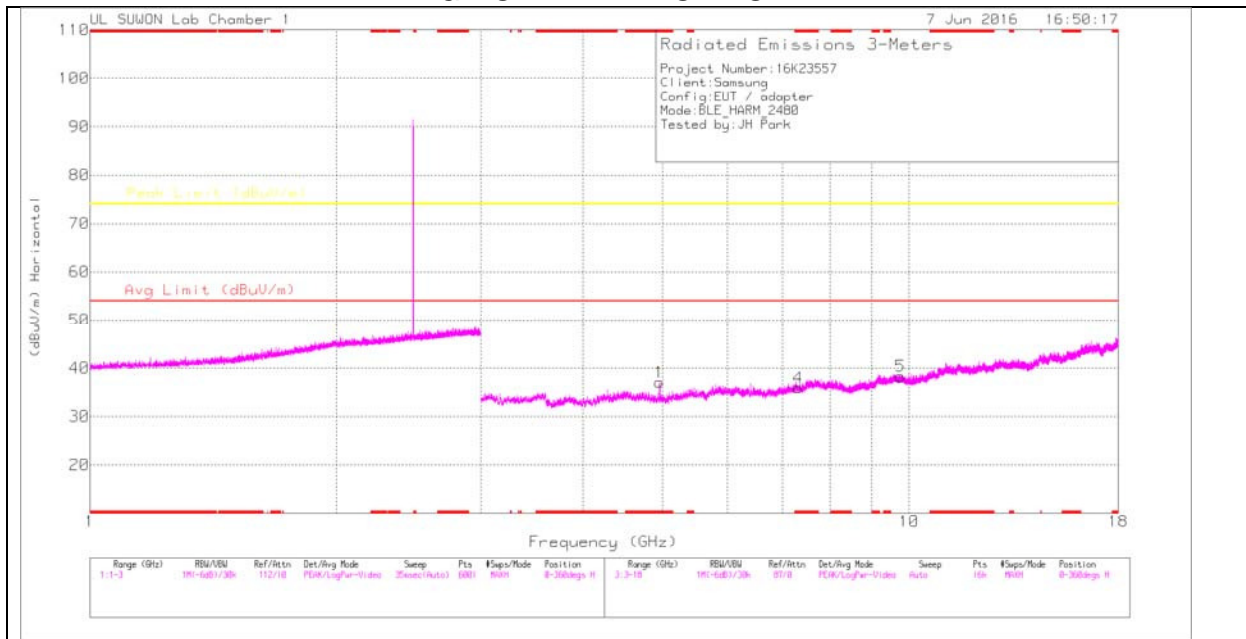

HIGH CHANNEL VERTICAL

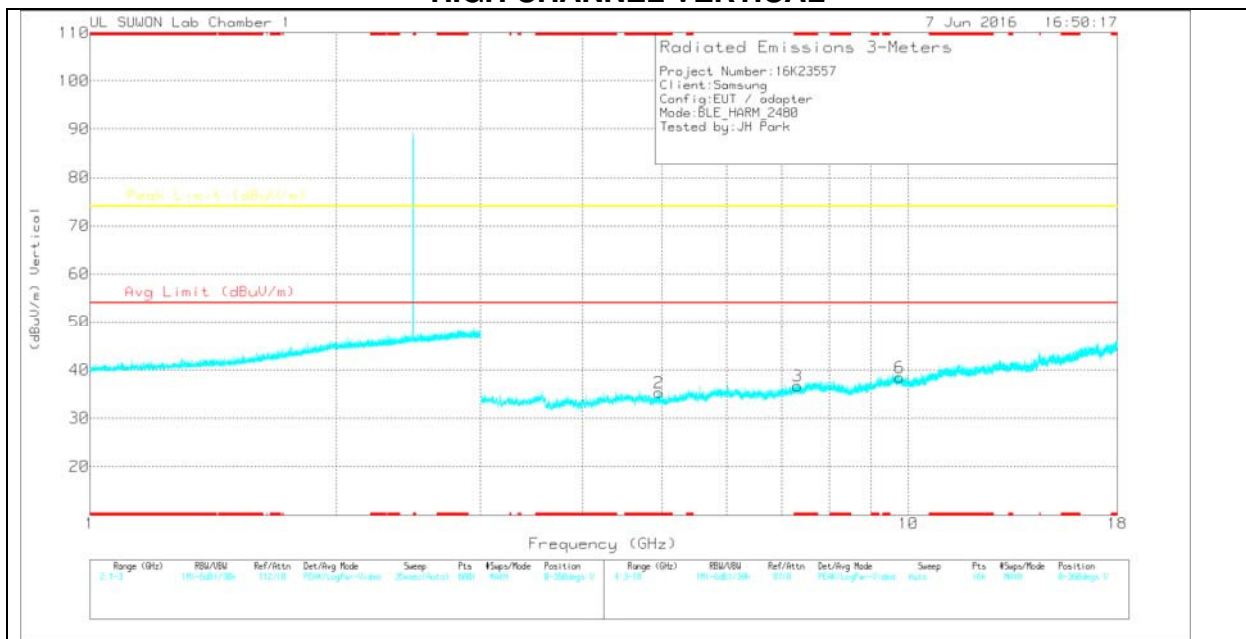

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001687 24)_150619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.959	28.16	PK	33.9	-25	0	37.06	-	-	74	-36.94	0-360	100	H
4	* 7.322	22.51	PK	35.9	-22.5	0	35.91	-	-	74	-38.09	0-360	100	H
5	9.756	20.58	PK	37	-19.3	0	38.28	-	-	74	-35.72	0-360	100	H
2	* 4.959	26.35	PK	33.9	-25	0	35.25	-	-	74	-38.75	0-360	200	V
3	* 7.323	23.31	PK	35.9	-22.5	0	36.71	-	-	74	-37.29	0-360	100	V
6	9.762	20.71	PK	37	-19.3	0	38.41	-	-	74	-35.59	0-360	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	3117(001 68724)_1 50619	Path_3	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	37.39	PK2	33.9	-25	0	46.29	-	-	74	-27.71	204	107	H
* 4.96	27.57	MAv1	33.9	-25	2.06	38.53	54	-15.47	-	-	204	107	H
* 4.96	36.11	PK2	33.9	-25	0	45.01	-	-	74	-28.99	168	330	V
* 4.96	23.08	MAv1	33.9	-25	2.06	34.04	54	-19.96	-	-	168	330	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MAv1 - KDB558074 Option 1 Maximum RMS Average


11.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

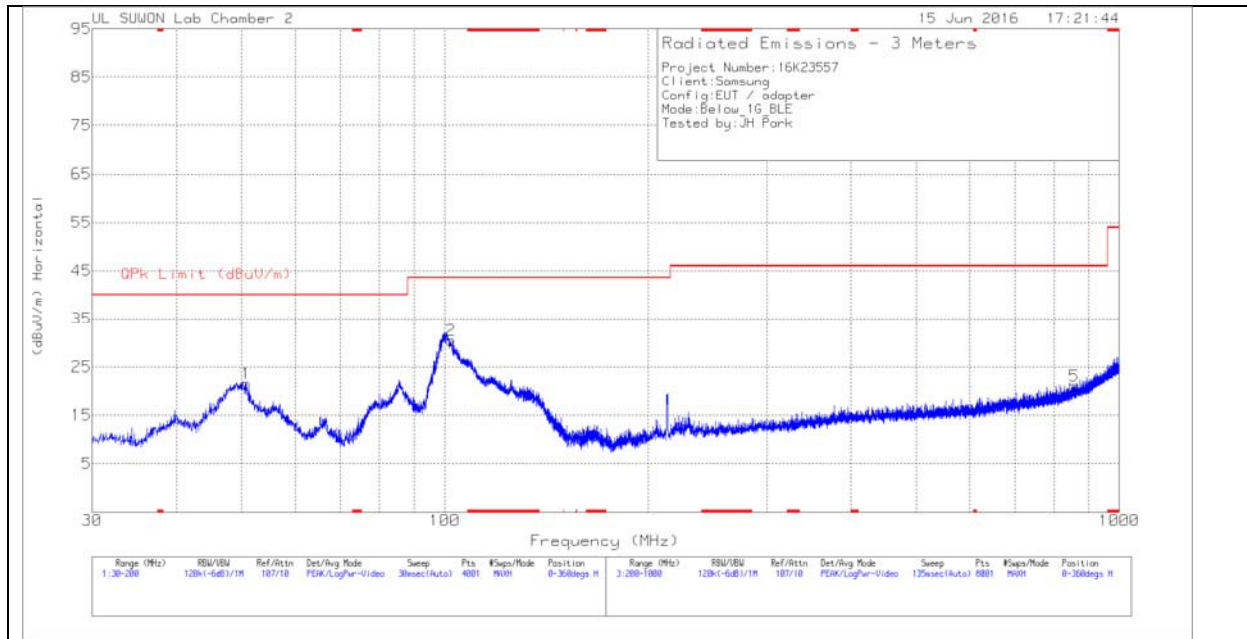

VERTICAL PLOT

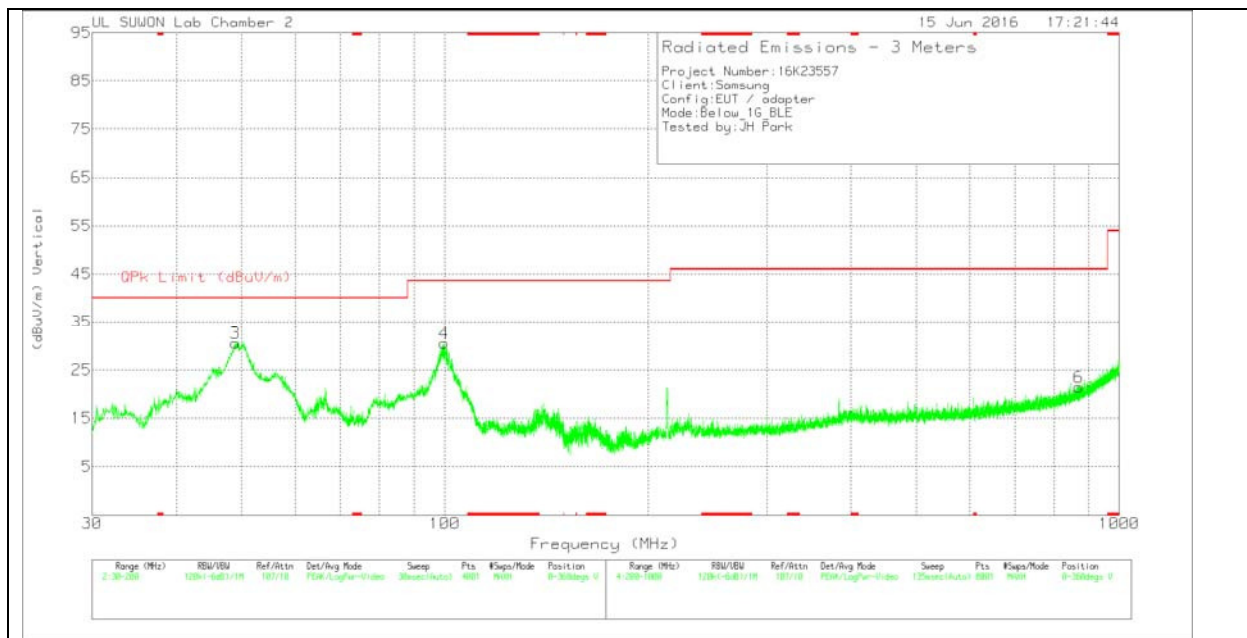

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-749	Below_1G	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	50.7825	38.26	Pk	14	-30.7	21.56	40	-18.44	0-360	400	H
2	102.165	49.71	Pk	11.4	-30.6	30.51	43.52	-13.01	0-360	200	H
3	48.9125	47.21	Pk	14.1	-30.7	30.61	40	-9.39	0-360	100	V
4	99.785	49.58	Pk	11.5	-30.5	30.58	43.52	-12.94	0-360	100	V
5	857.8	30.51	Pk	18.8	-28.3	21.01	46.02	-25.01	0-360	100	H
6	870.9	30.41	Pk	19.1	-28.1	21.41	46.02	-24.61	0-360	400	V

Pk - Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10 2009.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

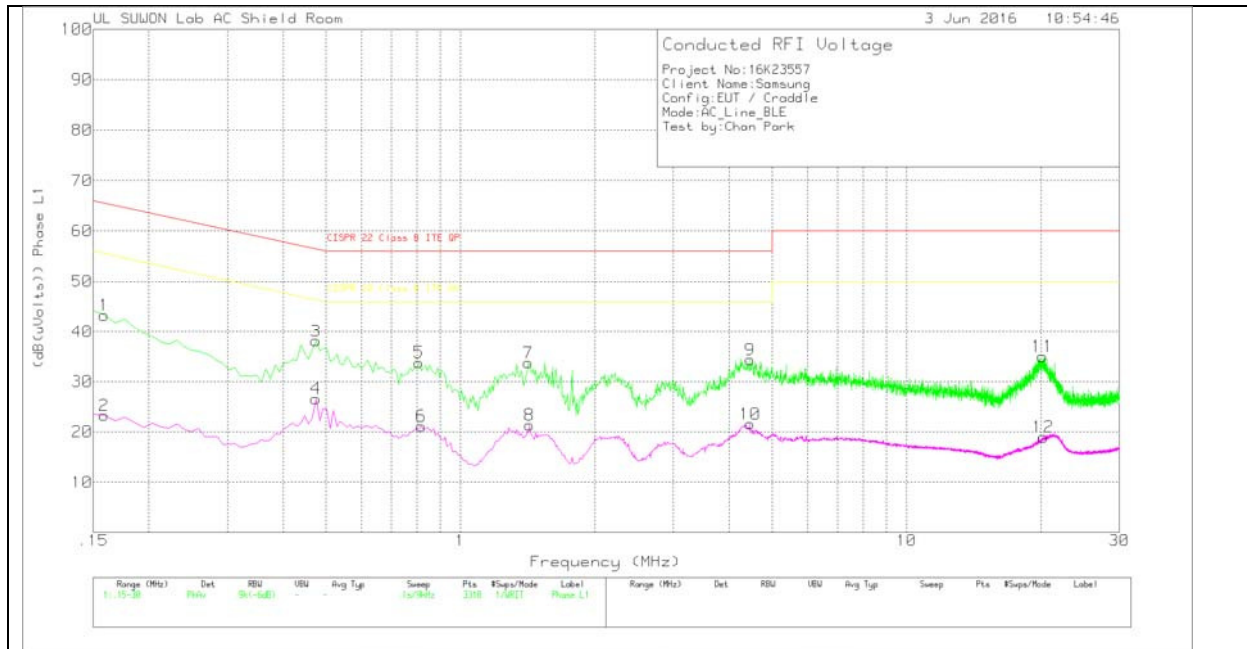

LINE 1 RESULTS

Trace Markers


Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_L1	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.159	33.33	Pk	10	0	43.33	65.52	-22.19	-	-
2	.159	13.29	Av	10	0	23.29	-	-	55.52	-32.23
3	.474	27.93	Pk	10.2	0	38.13	56.44	-18.31	-	-
4	.474	16.43	Av	10.2	0	26.63	-	-	46.44	-19.81
5	.807	23.81	Pk	10	0	33.81	56	-22.19	-	-
6	.816	11.15	Av	10	0	21.15	-	-	46	-24.85
7	1.419	23.84	Pk	9.8	.1	33.74	56	-22.26	-	-
8	1.428	11.47	Av	9.8	.1	21.37	-	-	46	-24.63
9	4.461	24.47	Pk	9.8	.1	34.37	56	-21.63	-	-
10	4.461	11.7	Av	9.8	.1	21.6	-	-	46	-24.4
11	20.184	24.42	Pk	10.4	.2	35.02	60	-24.98	-	-
12	20.256	8.39	Av	10.4	.2	18.99	-	-	50	-31.01

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

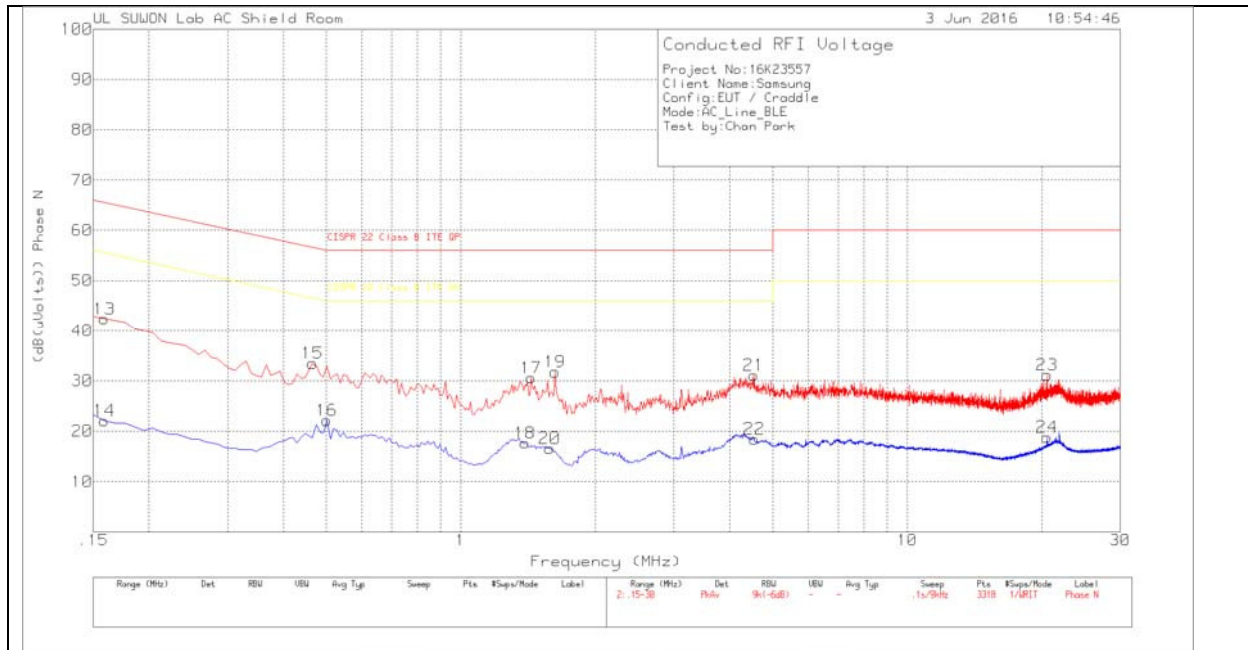

LINE 2 RESULTS

Trace Markers

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex-cord_N	CE Shield Room	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.159	32.37	Pk	10	0	42.37	65.52	-23.15	-	-
14	.159	12.1	Av	10	0	22.1	-	-	55.52	-33.42
15	.465	23.36	Pk	10.1	0	33.46	56.6	-23.14	-	-
16	.501	12.06	Av	10.1	0	22.16	-	-	46	-23.84
17	1.437	20.67	Pk	9.8	.1	30.57	56	-25.43	-	-
18	1.392	7.76	Av	9.8	.1	17.66	-	-	46	-28.34
19	1.626	21.87	Pk	9.8	.1	31.77	56	-24.23	-	-
20	1.581	6.73	Av	9.8	.1	16.63	-	-	46	-29.37
21	4.533	21.22	Pk	9.8	.1	31.12	56	-24.88	-	-
22	4.542	8.57	Av	9.8	.1	18.47	-	-	46	-27.53
23	20.571	20.36	Pk	10.6	.2	31.16	60	-28.84	-	-
24	20.571	8.04	Av	10.6	.2	18.84	-	-	50	-31.16

Pk - Peak detector

Av - Average detection