



**FCC CFR47 PART 15 SUBPART C**

**CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n**

**MODEL NUMBER: SM-G313U**

**FCC ID: A3LSMG313U**

**REPORT NUMBER: 14118260-4**

**ISSUE DATE: JULY 9, 2014**

*Prepared for*

**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*

**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	07/09/14	Initial Issue	D. Corona

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	6
4.2. <i>SAMPLE CALCULATION .....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	7
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	8
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. MEASUREMENT METHODS .....</b>	<b>12</b>
<b>8. SUMMARY TABLE .....</b>	<b>13</b>
<b>9. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
9.1. <i>6 dB BANDWIDTH.....</i>	14
9.1.1. 802.11b MODE IN THE 2.4 GHz BAND.....	15
9.1.2. 802.11g MODE IN THE 2.4 GHz BAND.....	15
9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	15
9.2. <i>99% BANDWIDTH.....</i>	19
9.2.1. 802.11b MODE IN THE 2.4 GHz BAND.....	19
9.2.2. 802.11g MODE IN THE 2.4 GHz BAND.....	19
9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	19
9.3. <i>AVERAGE POWER.....</i>	20
9.3.1. 802.11b MODE IN THE 2.4 GHz BAND.....	21
9.3.2. 802.11g MODE IN THE 2.4 GHz BAND.....	21
9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	21
9.4. <i>OUTPUT POWER.....</i>	22
9.4.1. 802.11b MODE IN THE 2.4 GHz BAND.....	23
9.4.2. 802.11g MODE IN THE 2.4 GHz BAND.....	23
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	23
9.5. <i>PSD.....</i>	28
9.5.1. 802.11b MODE IN THE 2.4 GHz BAND.....	28
9.5.2. 802.11g MODE IN THE 2.4 GHz BAND.....	28

---

9.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND .....	29
9.6.	<i>OUT-OF-BAND EMISSIONS</i> .....	33
9.6.1.	802.11b MODE IN THE 2.4 GHz BAND .....	34
9.6.2.	802.11g MODE IN THE 2.4 GHz BAND .....	40
9.6.3.	802.11n MODE IN THE 2.4 GHz BAND .....	46
<b>10.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>52</b>
10.1.	<i>LIMITS AND PROCEDURE</i> .....	52
10.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	53
10.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND .....	53
10.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND .....	66
10.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND .....	79
10.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	92
<b>11.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>95</b>
<b>12.</b>	<b>SETUP PHOTOS</b> .....	<b>99</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n  
**MODEL:** SM-G313U  
**SERIAL NUMBER:** FL-196-C (Radiated), 1887196 (Conducted)  
**DATE TESTED:** MAY 28 - JUNE 3, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL Verification Services Inc. By:

Tested By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.



CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input checked="" type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	18.21	66.22
2412 - 2462	802.11g	20.88	122.46
2412 - 2462	802.11n HT20	19.5	89.13

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -2.97 dBi.

---

## 5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps  
802.11g mode: 6 Mbps  
802.11n HT20mode: MCS0

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	EP-TA10JWS	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

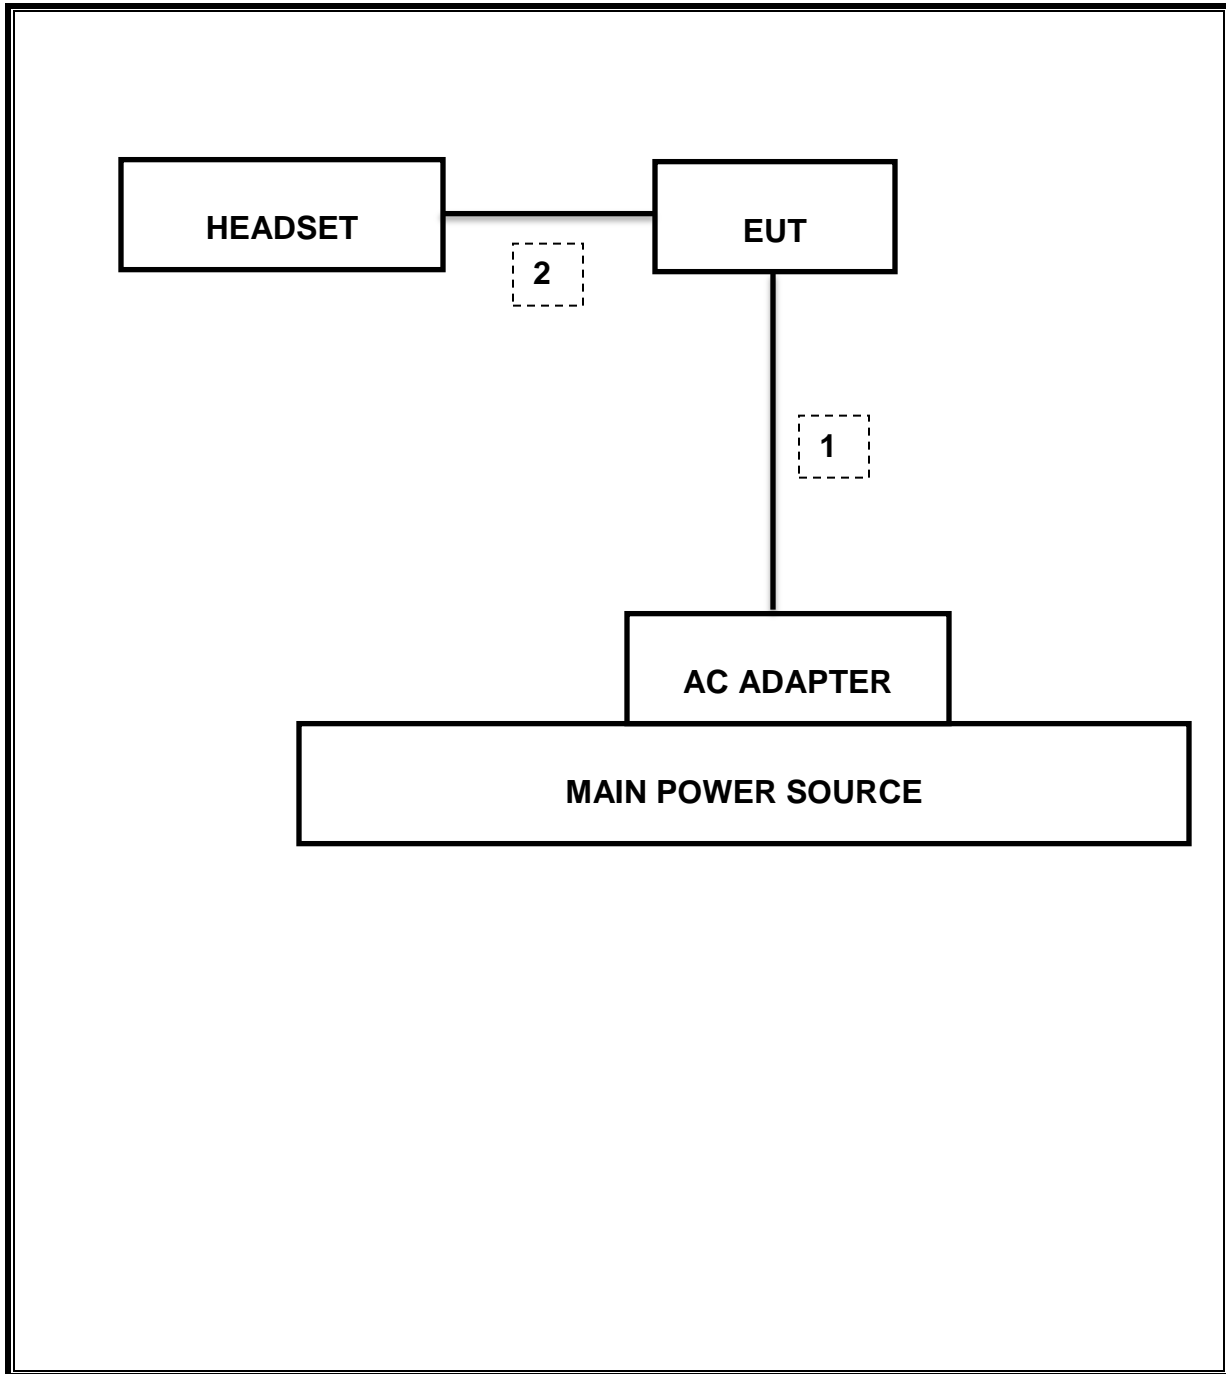

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
Spectrum Analyzer,9KHz-40GHz	HP	8564E	C00986	04/01/15
EMI Test Receiver, 9 kHz-7 GHz	R & S	ESCI 7	1000741	08/13/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/18/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
Antenna, Horn, 1-18 GHz	ETS	3117	C01022	02/21/15
Antenna, Horn,18- 26 GHz	ARA	MWH-1826/B	C00946	11/12/14
Antenna, Horn, 26-40 GHz	ARA	MWH-2640	C00891	06/28/14
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	T243	03/06/15
RF Preamplifier, 100KHz -> 1300MHz	HP	TBD	C00825	06/01/14
RF Preamplifier, 1GHz - 18GHz	Miteq	NSP4000-SP2	924343	03/23/15
RF Preamplifier, 1GHz - 26.5GHz	HP	8449B	F00351	06/27/14
AC Power Supply, 2,500VA 45-500Hz	Elgar-Ametek	CW2501M	F00013	CNR
RF Preamplifier, 1GHz - 40GHz	Miteq	NSP4000-SP2	C00990	08/20/14
Attenuator / Switch driver	HP	11713A	F00204	CNR
Low Pass Filter 3GHz	Micro-Tronics	LPS17541	F00219	05/23/15
High Pass Filter 5GHz	Micro-Tronics	HPS17542	F00222	05/22/15
High Pass Filter 6GHz	Micro-Tronics	HPM17543	F00224	05/22/15

---

## 7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r01: Measurement Procedure PK2 is used for power and PKPSD is used for power spectral density.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Band edge emissions within Restricted Bands are measured using RMS with duty cycle factor offset method.

## 8. SUMMARY TABLE

The model FCC ID: A3LSMG313U shares the same enclosure and circuit board as mode FCC ID: A3LSMG313ML. The WWAN/WLAN/Bluetooth circuitry and layout, including antenna, are almost identical between the two units. The WWAN/WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units.

After confirming through preliminary radiated emissions that the performance of the A3LSMG313U WLAN remains representative of this model (FCC ID: A3LSMG313U) test data for FCC ID: A3LSMG313ML is being submitted for this application.

Radiated emissions were fully re-evaluated against FCC Part 15B requirements for digital devices and results indicated no significant differences between the two versions. Other differences between the two FCC IDs are in the WCDMA 1, 2, 5 changed to WCDMA 1, 2, 8 by changing W5 DPX to W8 DPX.

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	9.54MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-32.99dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	20.88dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-6.59dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	31.06dBuV(AV)
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	49.40dBuV/m

---

## 9. ANTENNA PORT TEST RESULTS

### 9.1. 6 dB BANDWIDTH

#### LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

#### TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW  $\geq 3 \times$  RBW, peak detector and max hold.

#### RESULTS

**9.1.1. 802.11b MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.54	0.5
Mid	2437	9.54	0.5
High	2462	9.54	0.5
Worst		9.54	


**9.1.2. 802.11g MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.08	0.5
Mid	2437	15.12	0.5
High	2462	15.00	0.5
Worst		15.00	


**9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.04	0.5
Mid	2437	15.21	0.5
High	2462	15.08	0.5
Worst		15.04	


**802.11b 6 dB BANDWIDTH**

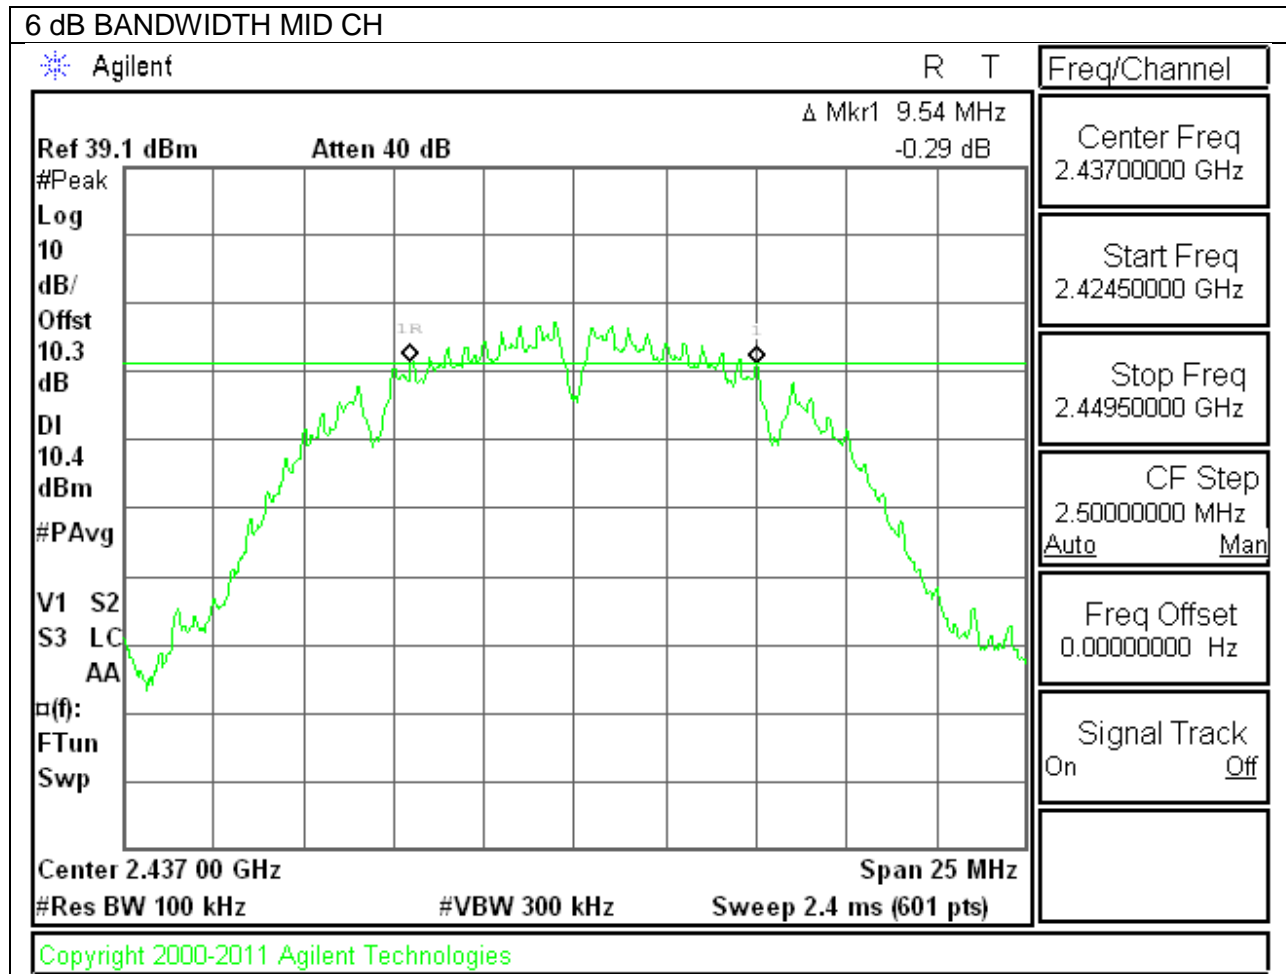

**802.11g 6 dB BANDWIDTH**

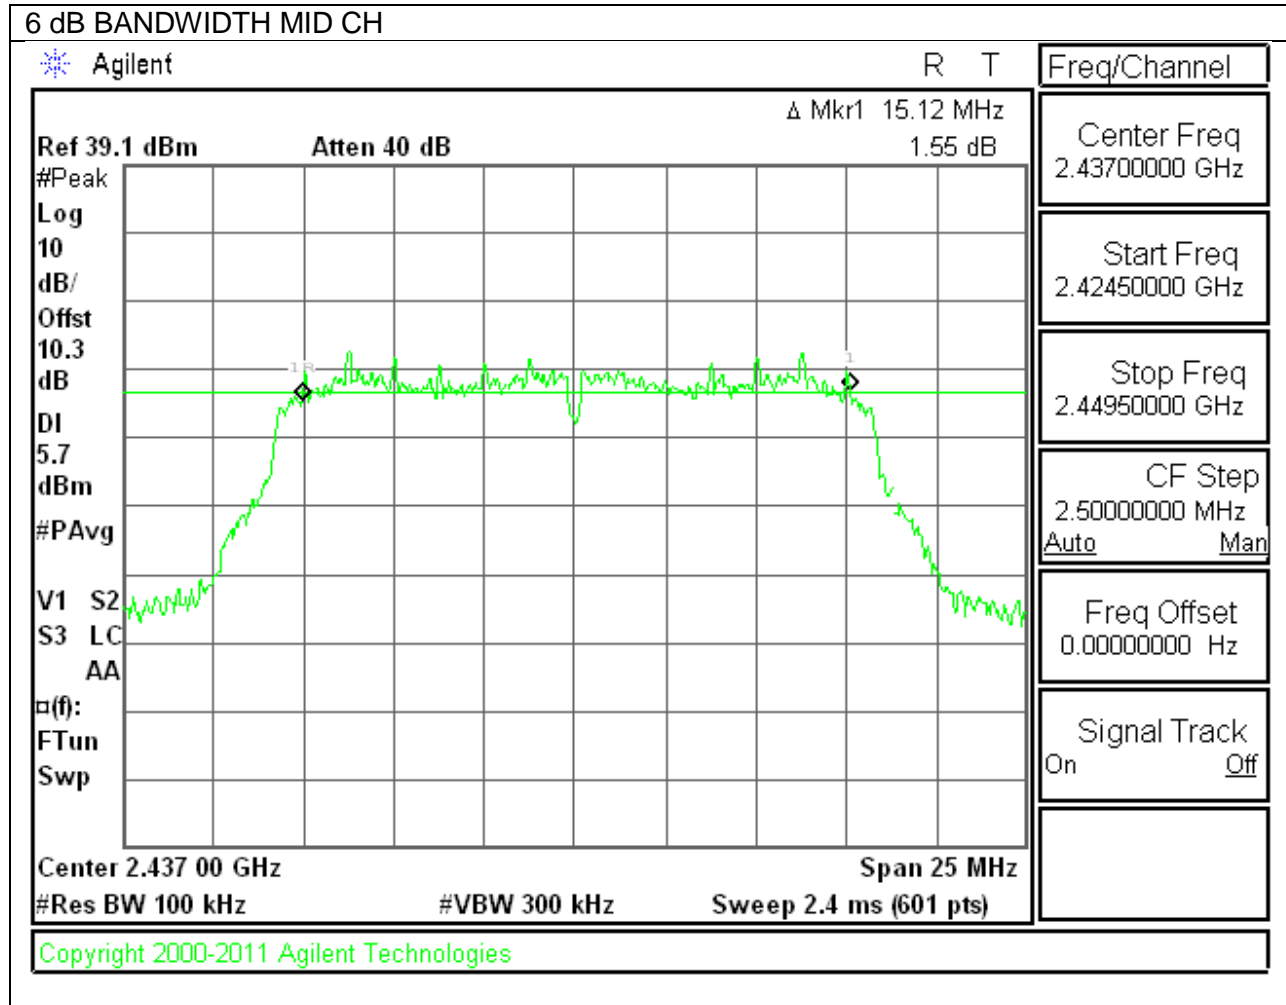

**802.11n 6 dB BANDWIDTH**

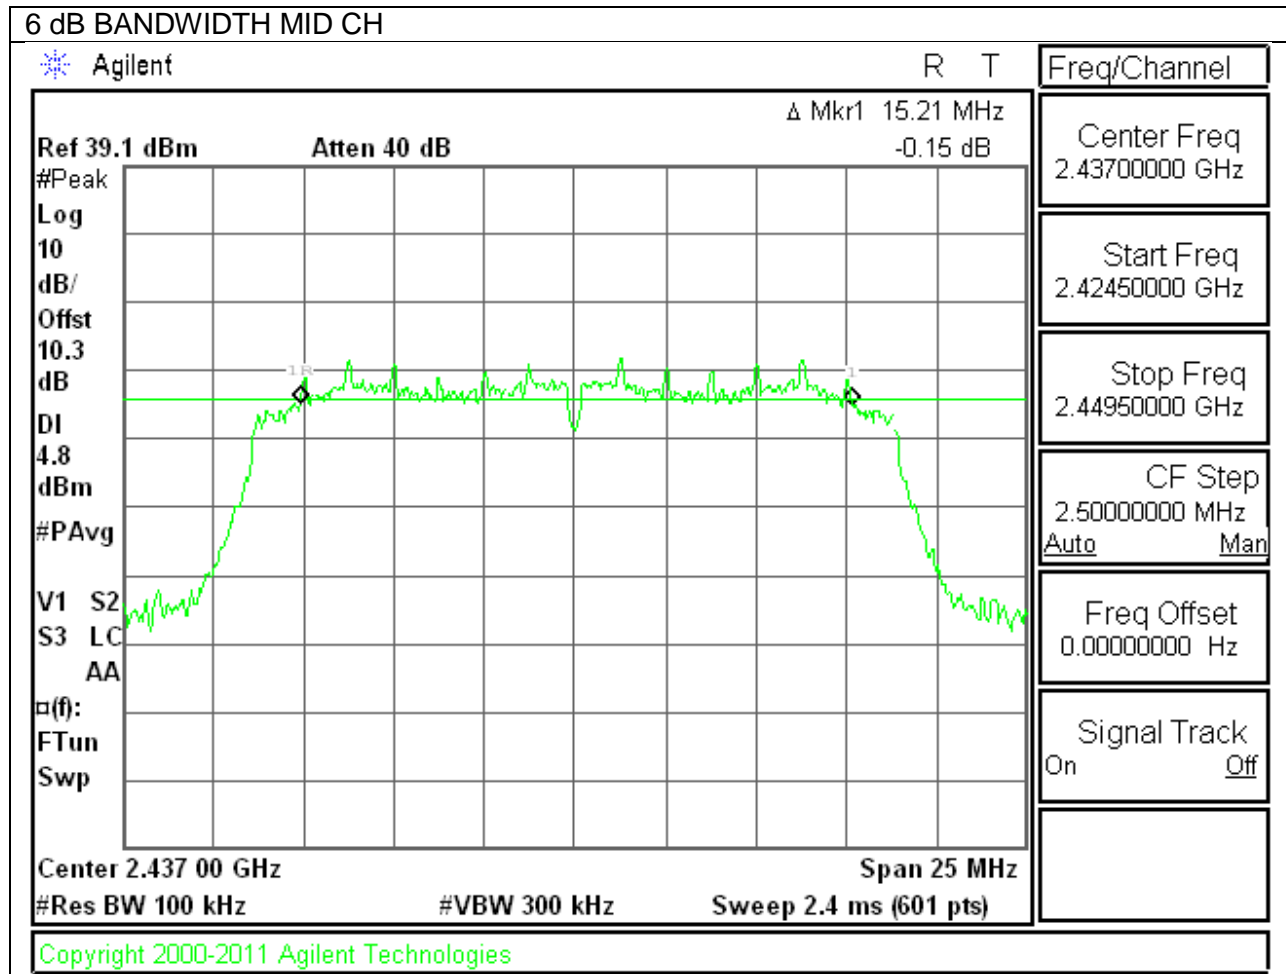

## 9.2. 99% BANDWIDTH

### LIMITS

No limit for reporting purposes only.

### RESULTS

#### 9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	13.96
Mid	2437	13.99
High	2462	13.92
Worst		13.99

#### 9.2.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.01
Mid	2437	16.15
High	2462	16.03
Worst		16.15

#### 9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.02
Mid	2437	17.30
High	2462	17.08
Worst		17.30

### **9.3. AVERAGE POWER**

#### **LIMITS**

No limit for reporting purposes only.

#### **TEST PROCEDURE**

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.2 dB (including 10 dB pad and 0.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### **RESULTS**

### 9.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	15.40
Mid	2437	15.40
High	2462	15.30
Worst		15.400

### 9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	12.90
Mid	2437	12.80
High	2462	12.70
Worst		12.900

### 9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	11.80
Mid	2437	11.80
High	2462	11.80
Worst		11.800

## **9.4. OUTPUT POWER**

### **LIMITS**

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **DIRECTIONAL ANTENNA GAIN**

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

**RESULTS**

**9.4.1. 802.11b MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.97	30.00	30	36	30.00
Mid	2437	-2.97	30.00	30	36	30.00
High	2462	-2.97	30.00	30	36	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	18.00	18.00	30.00	-12.00
Mid	2437	18.19	18.19	30.00	-11.81
High	2462	18.21	18.21	30.00	-11.79
Worst			18.21		

**9.4.2. 802.11g MODE IN THE 2.4 GHz BAND**

**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.97	30.00	30	36	30.00
Mid	2437	-2.97	30.00	30	36	30.00
High	2462	-2.97	30.00	30	36	30.00

**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	20.88	20.88	30.00	-9.12
Mid	2437	20.44	20.44	30.00	-9.56
High	2462	20.55	20.55	30.00	-9.45
Worst			20.88		

**9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND**


**Limits**

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-2.97	30.00	30	36	30.00
Mid	2437	-2.97	30.00	30	36	30.00
High	2462	-2.97	30.00	30	36	30.00


**Results**

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.50	19.50	30.00	-10.50
Mid	2437	19.23	19.23	30.00	-10.77
High	2462	19.40	19.40	30.00	-10.60
Worst			19.50		


**802.11b OUTPUT POWER, Chain 0**

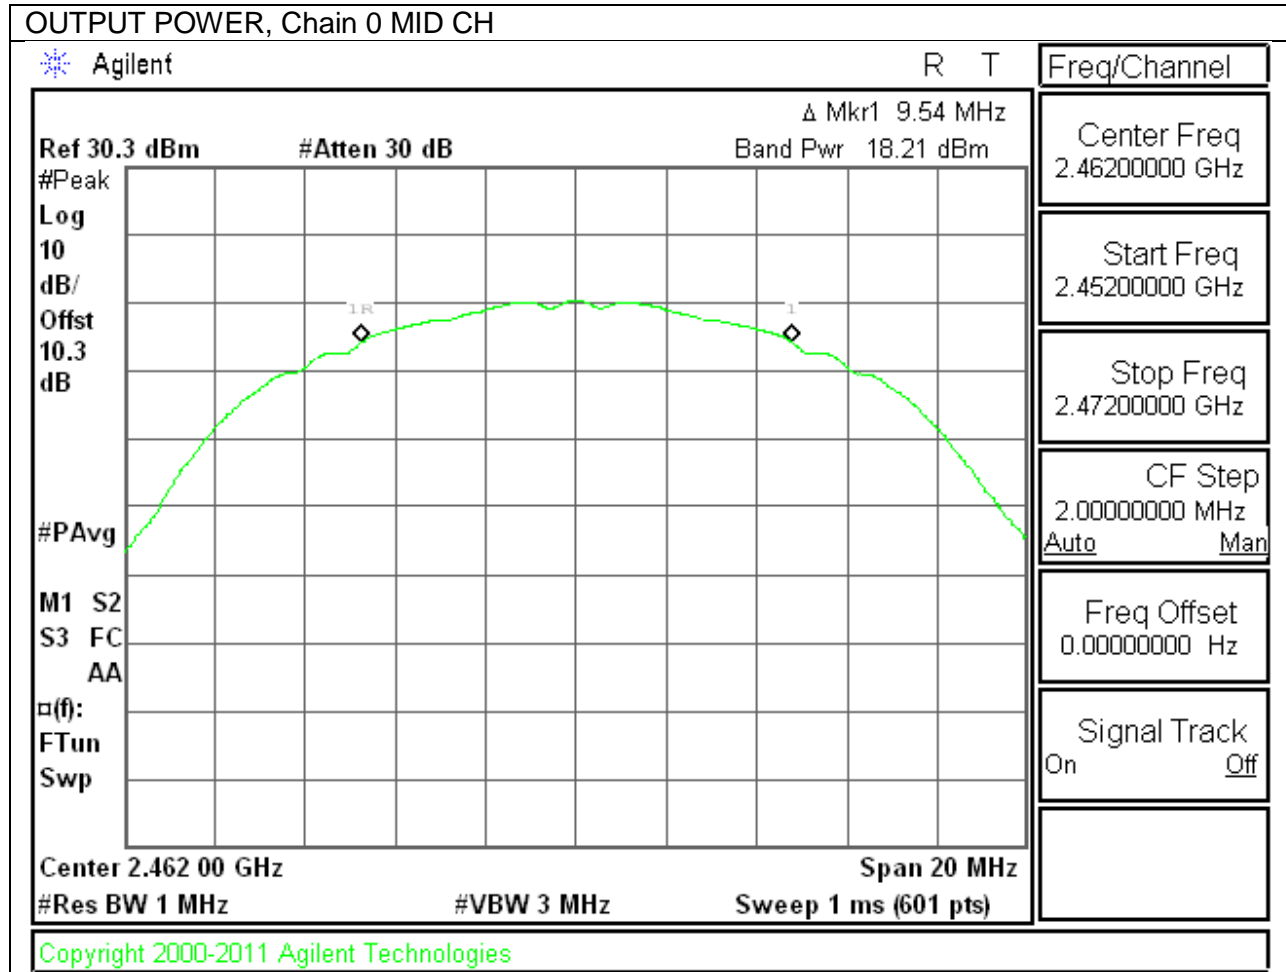

**802.11g OUTPUT POWER, Chain 0**

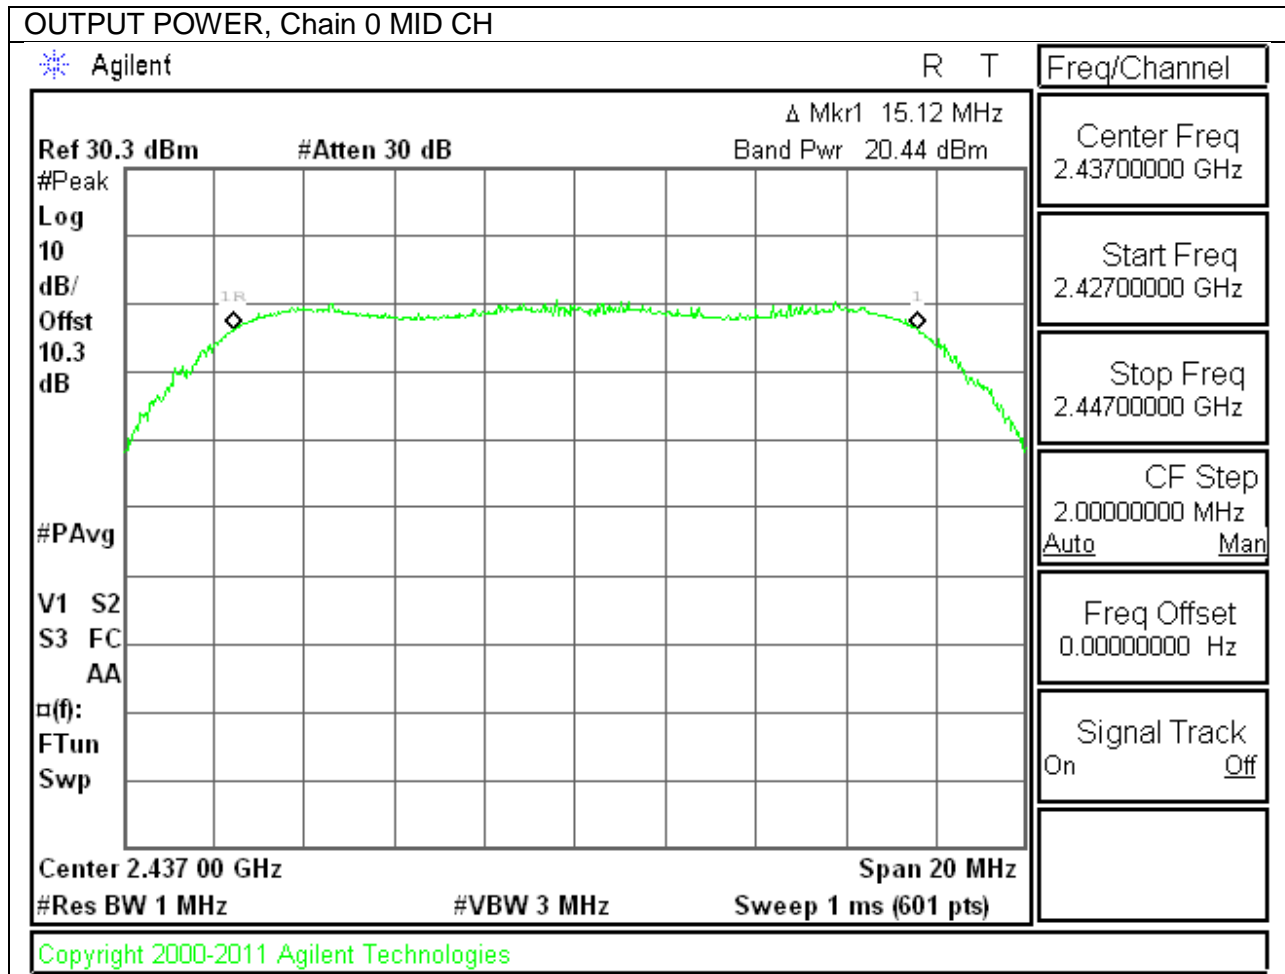

**802.11n OUTPUT POWER, Chain 0**

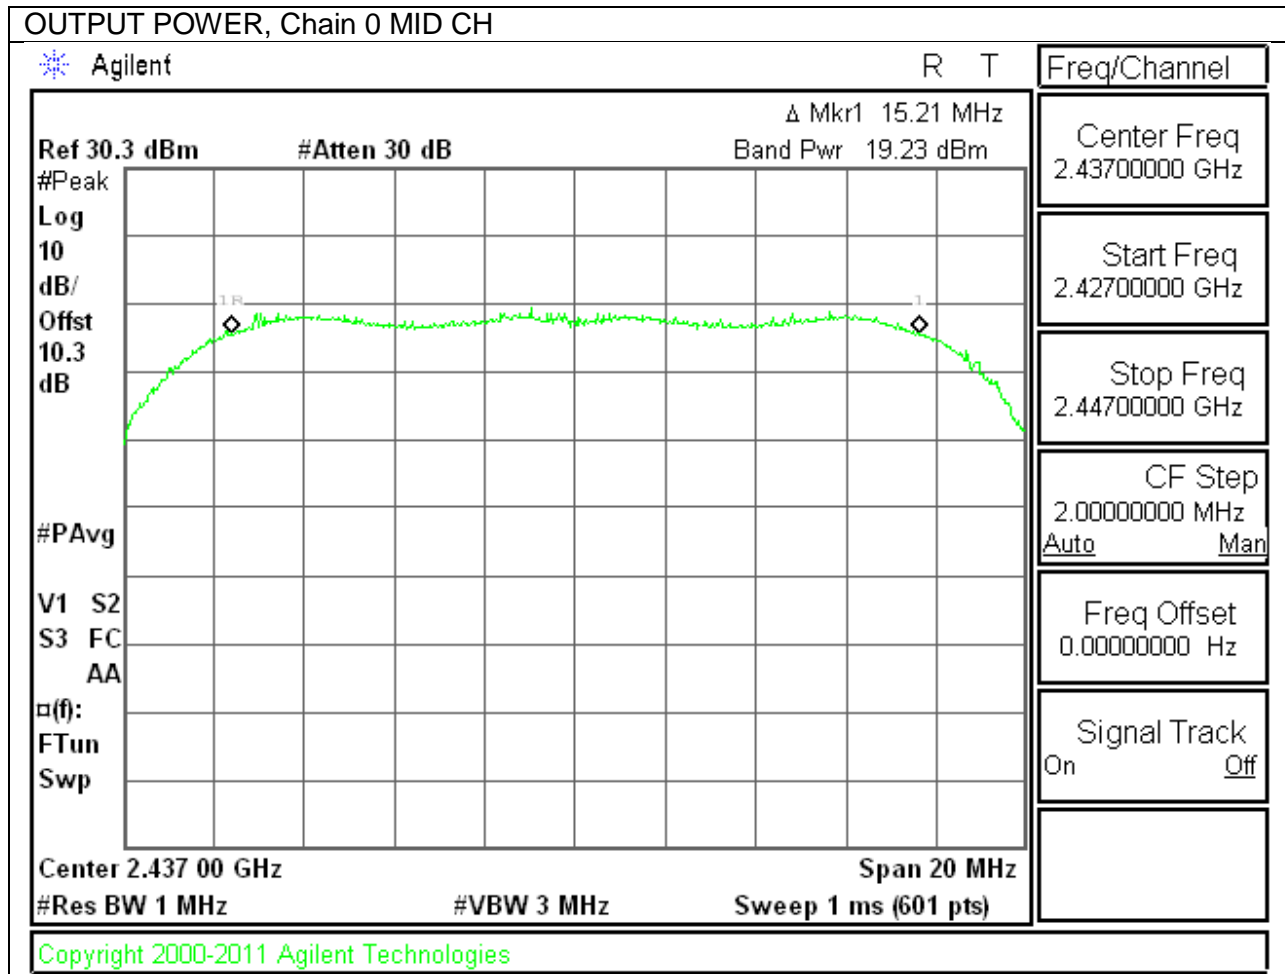

## 9.5. PSD

### LIMITS

FCC §15.247

IC RSS-210 A8.2

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS

#### 9.5.1. 802.11b MODE IN THE 2.4 GHz BAND

##### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-7.07	8.0	-15.1
Mid	2437	-6.59	8.0	-14.6
High	2462	-6.86	8.0	-14.9

#### 9.5.2. 802.11g MODE IN THE 2.4 GHz BAND

##### PSD Results


Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.48	8.0	-19.5
Mid	2437	-10.80	8.0	-18.8
High	2462	-11.34	8.0	-19.3

### 9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


#### PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-12.68	8.0	-20.7
Mid	2437	-13.52	8.0	-21.5
High	2462	-12.69	8.0	-20.7


**802.11b PSD, Chain 0**

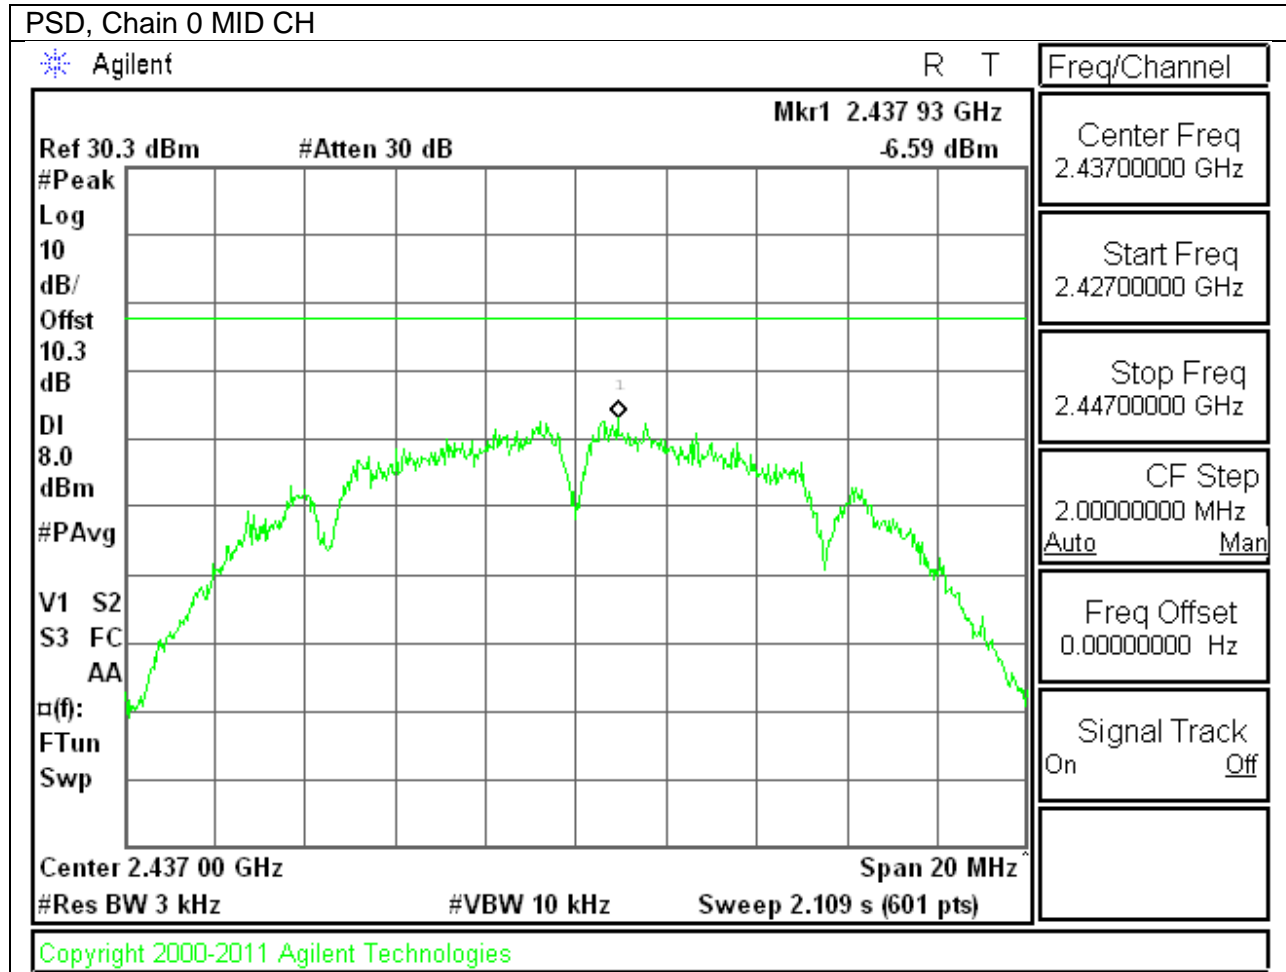

**802.11g PSD, Chain 0**

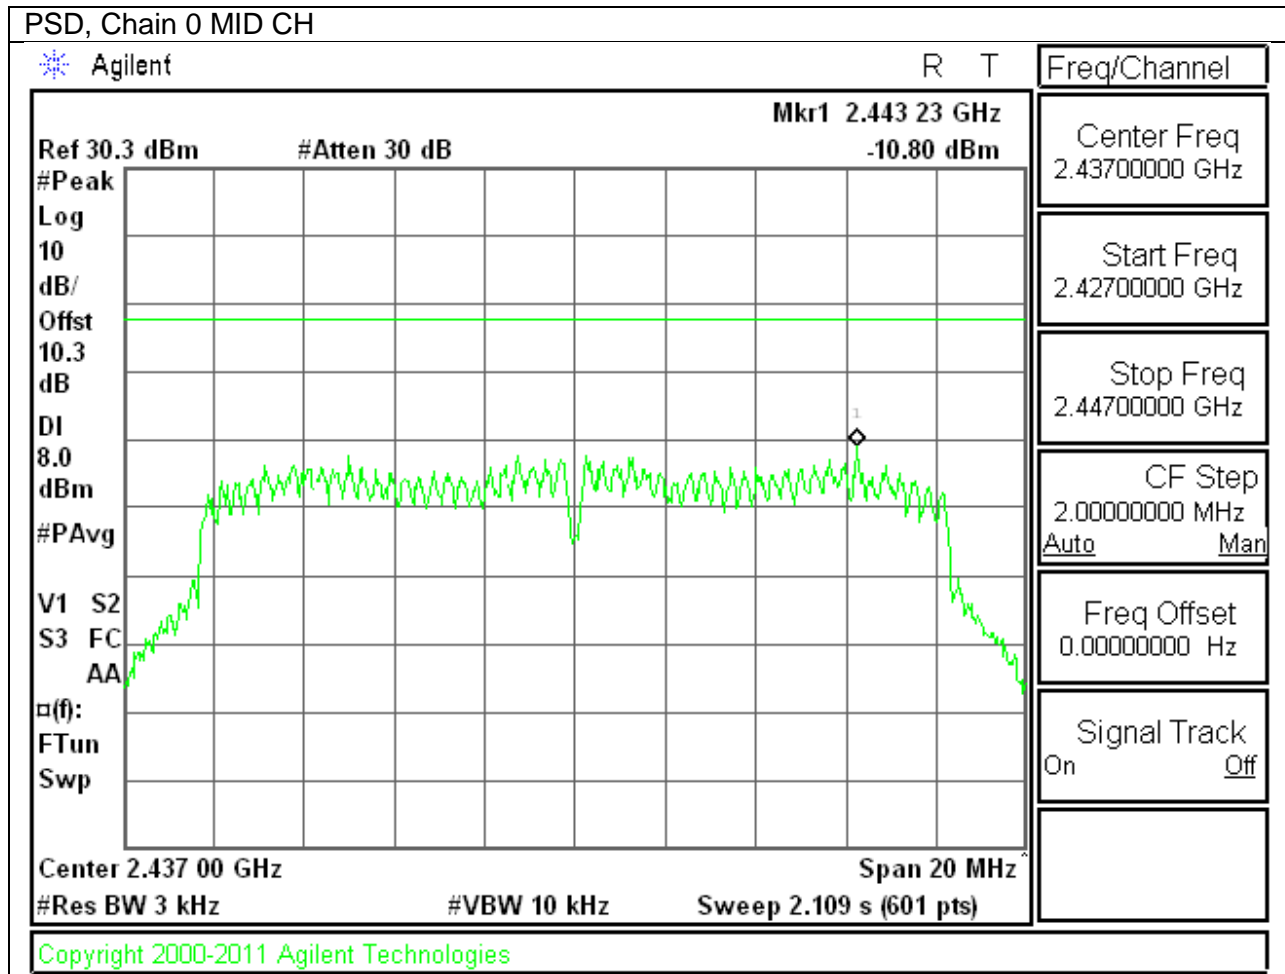

**802.11n PSD, Chain 0**

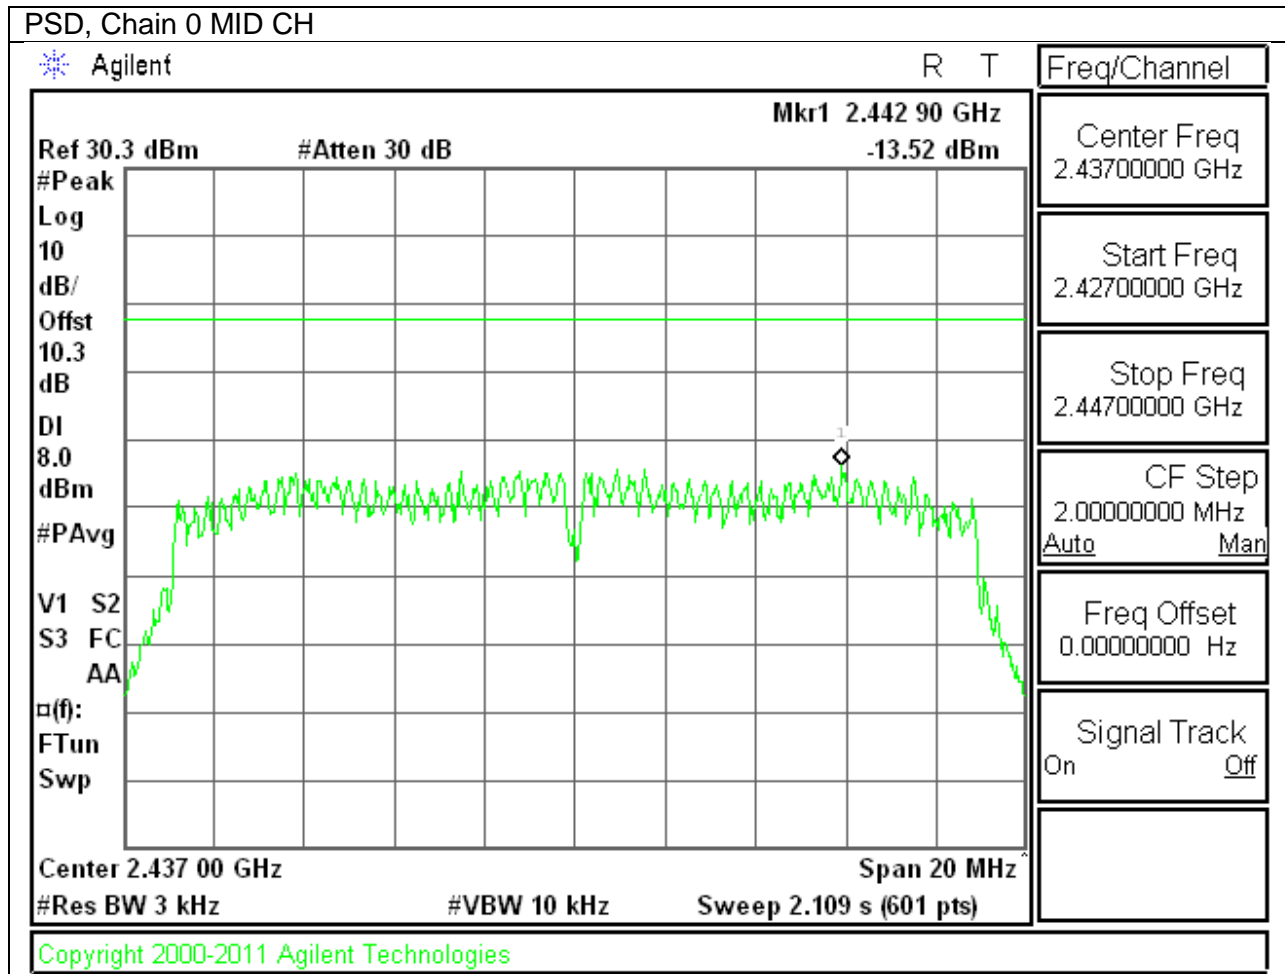

## 9.6. OUT-OF-BAND EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


**RESULTS**

**9.6.1. 802.11b MODE IN THE 2.4 GHz BAND**


**IN-BAND REFERENCE LEVEL**

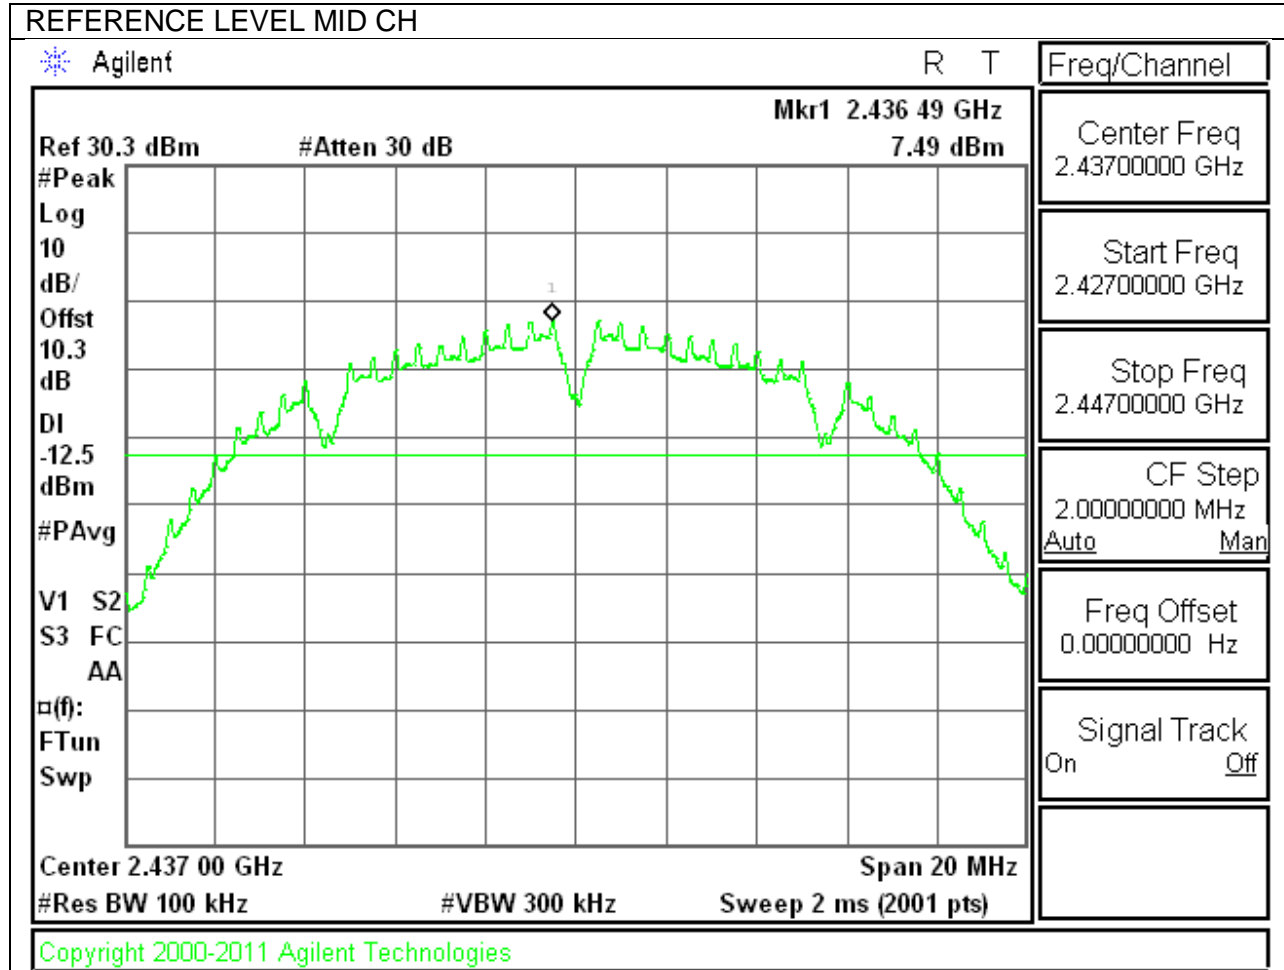


**LOW CHANNEL BANDEDGE**

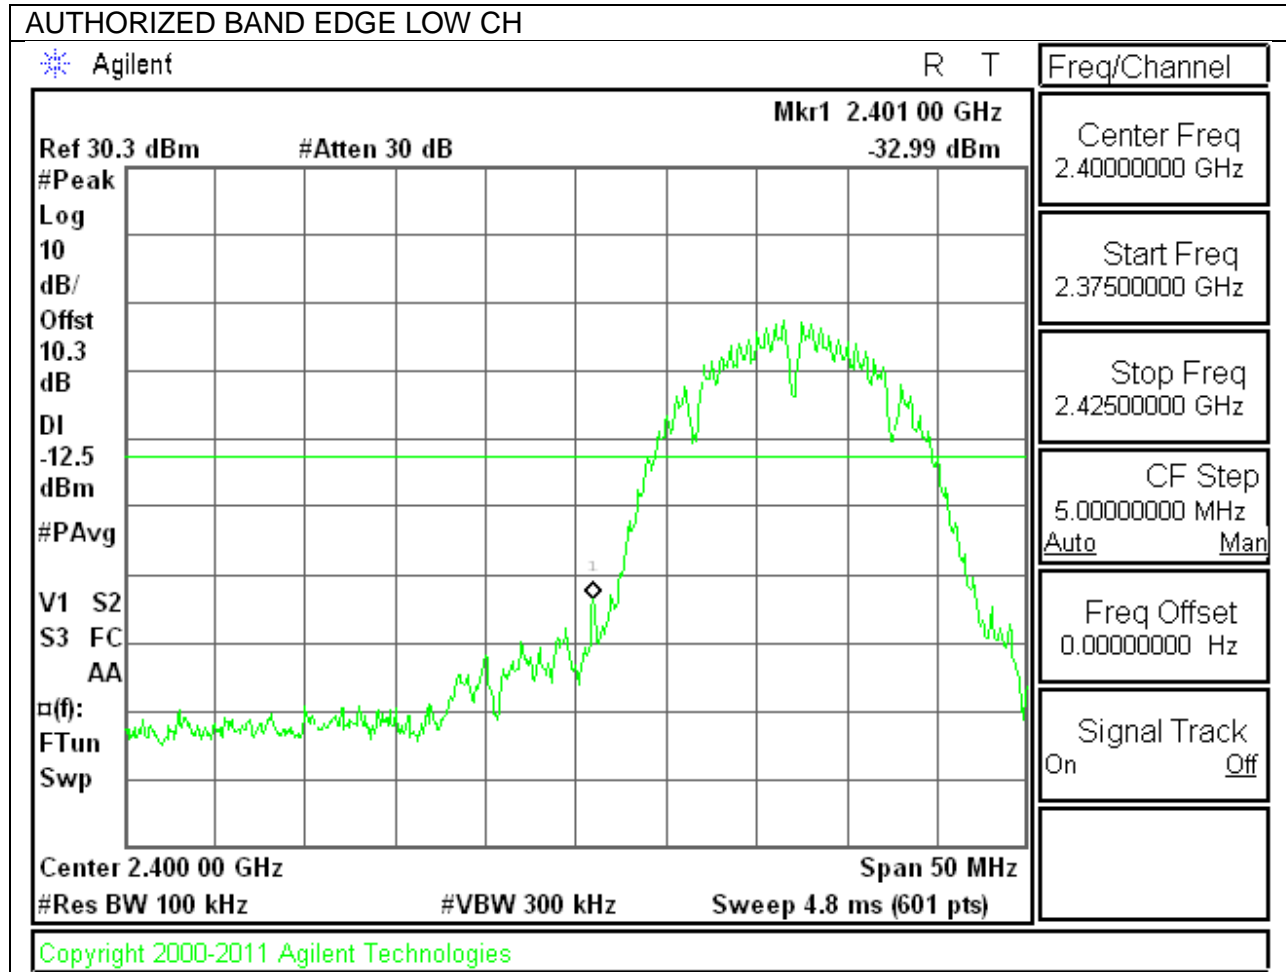



**HIGH CHANNEL BANDEDGE**

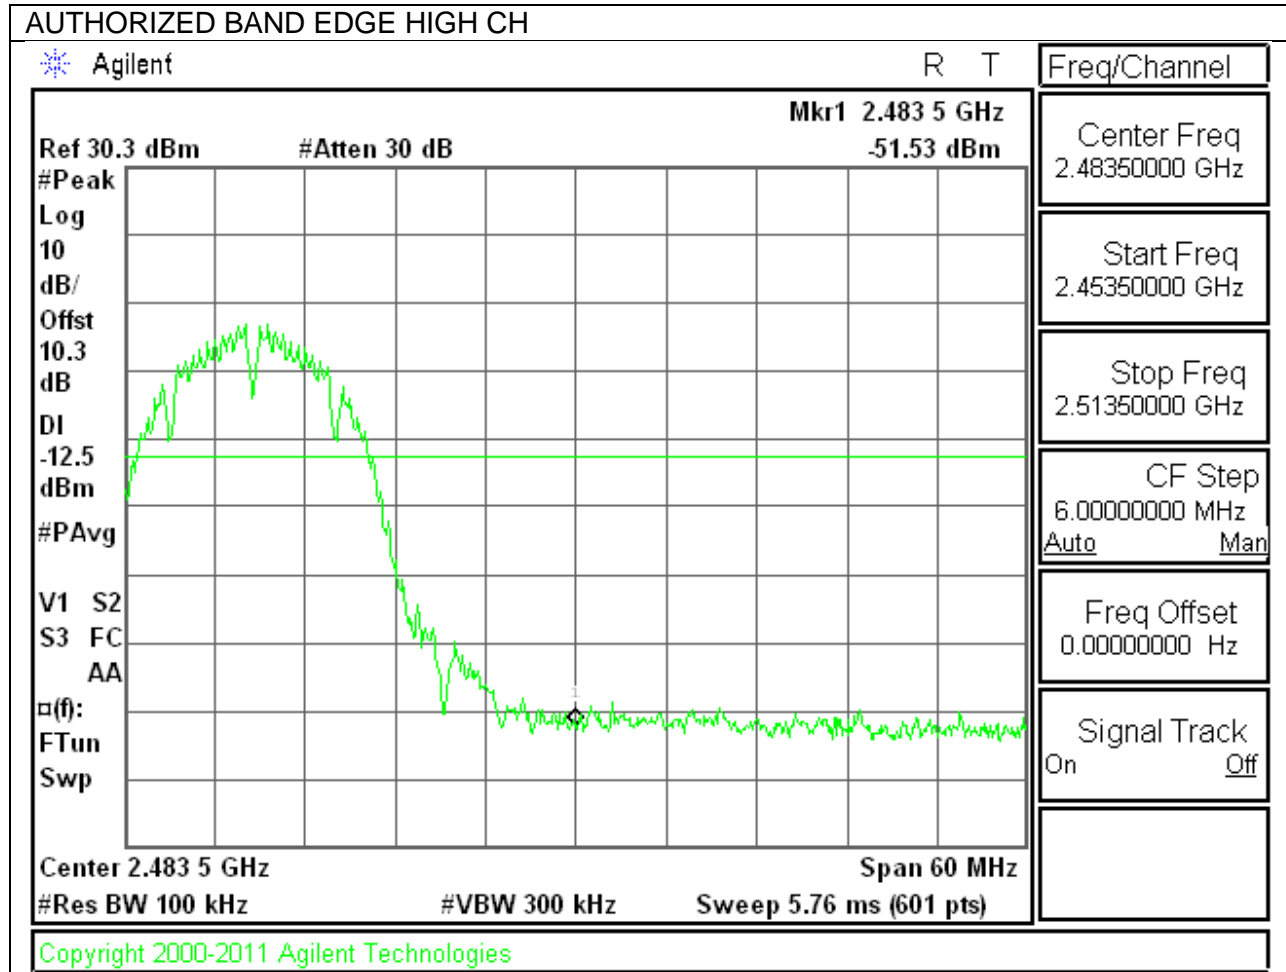

**OUT-OF-BAND EMISSIONS**

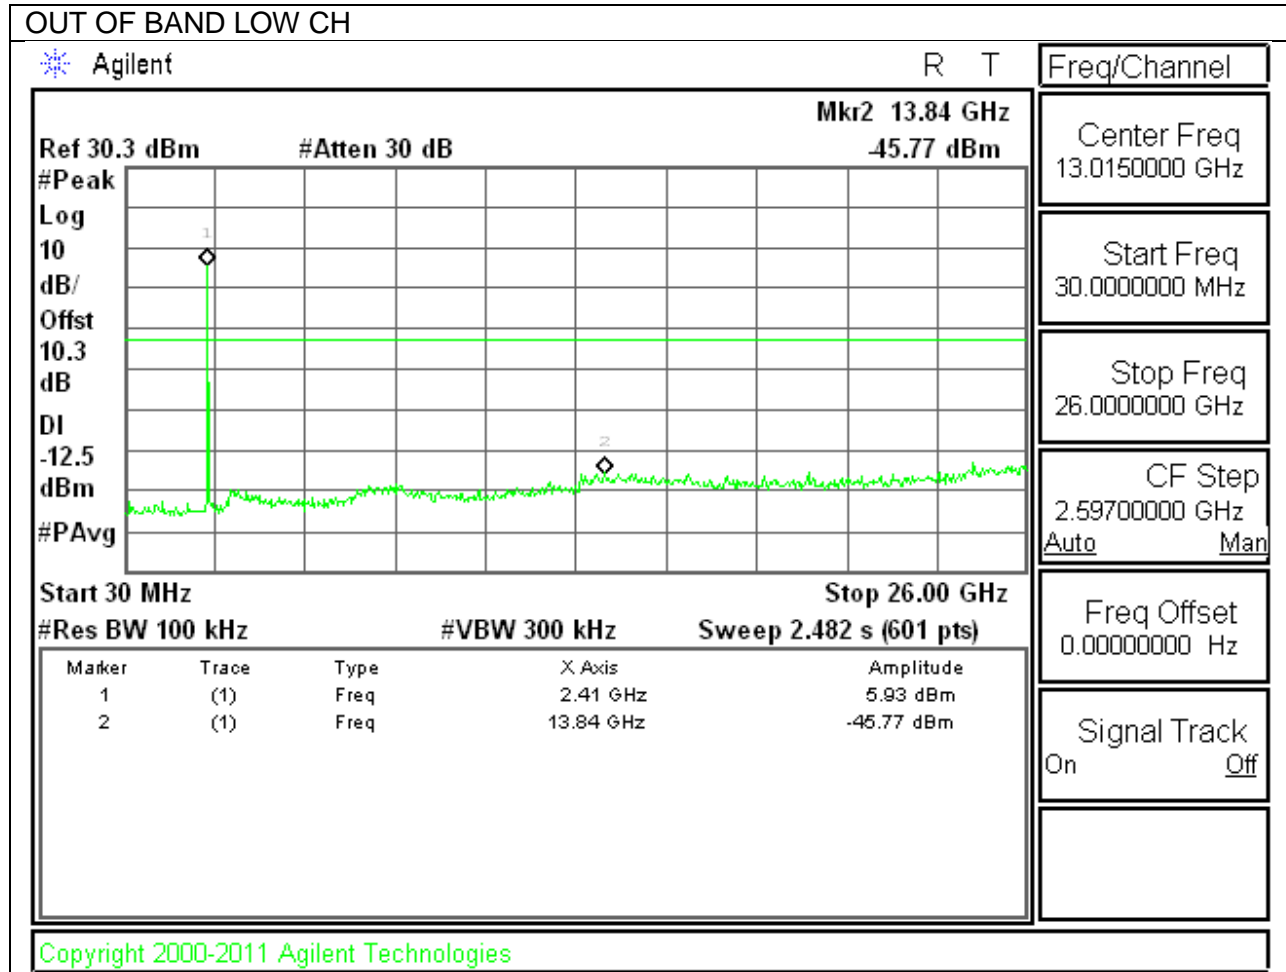


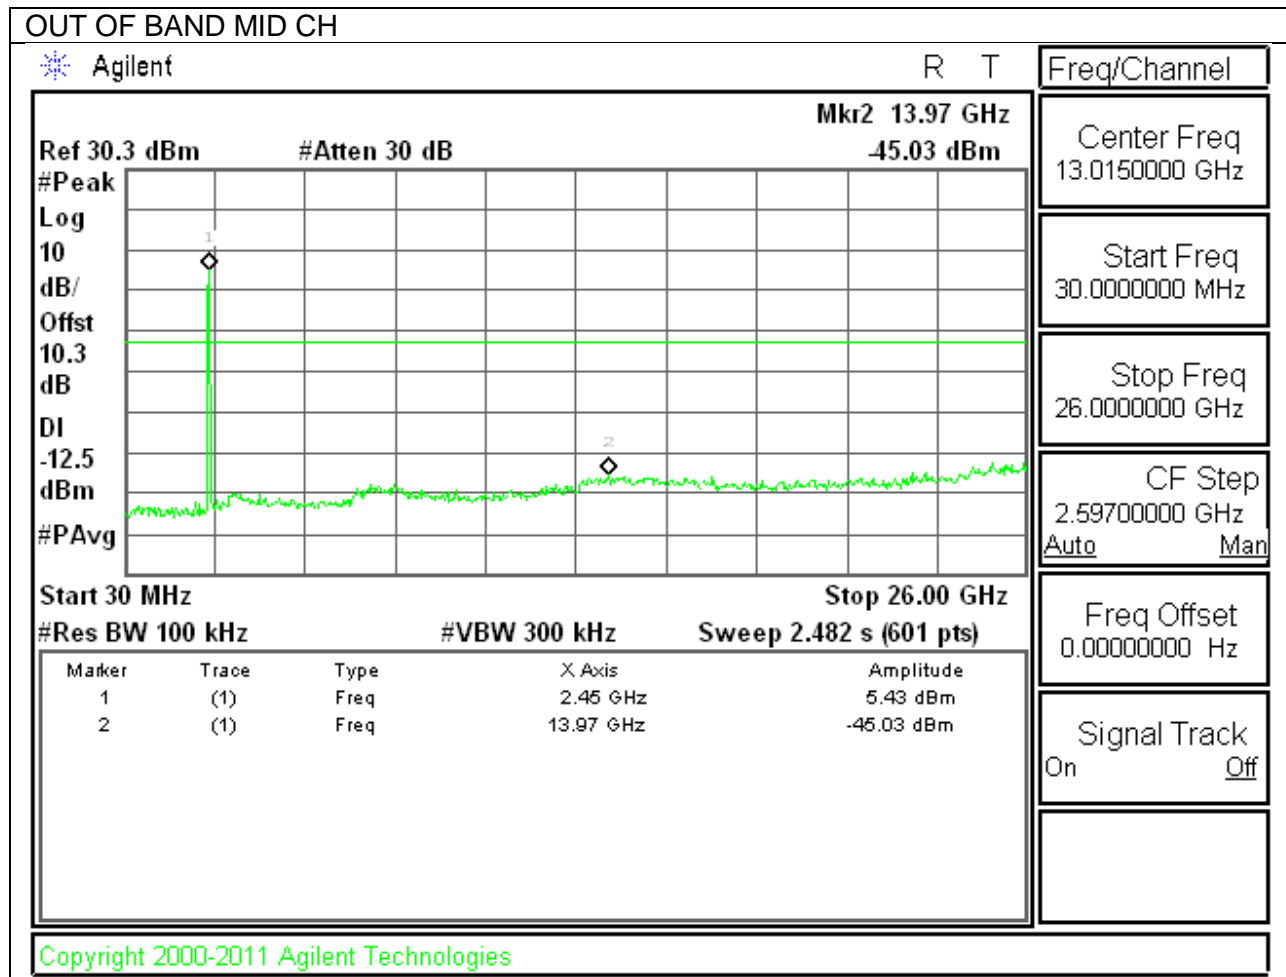

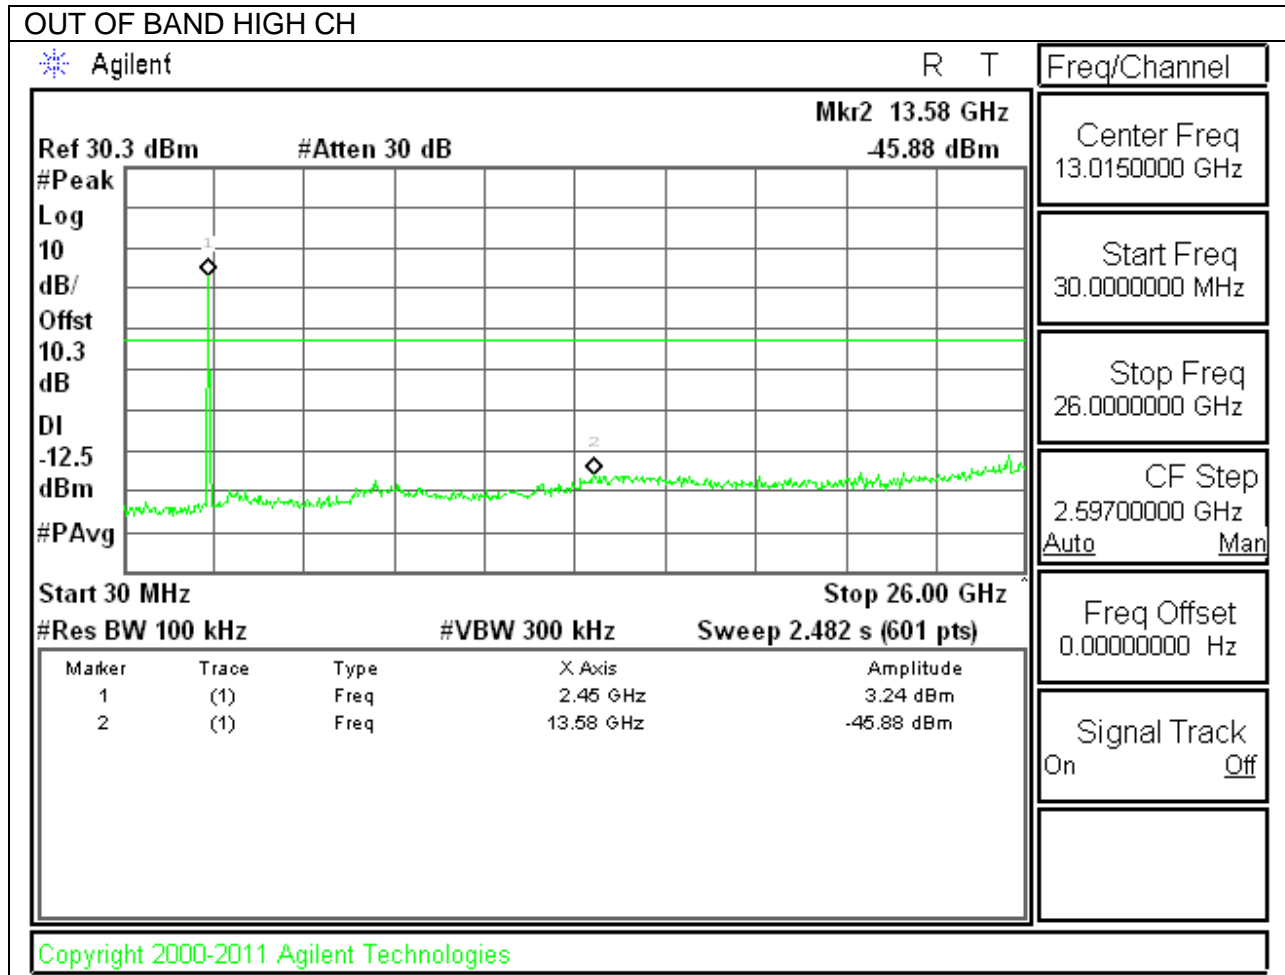


### 9.6.2. 802.11g MODE IN THE 2.4 GHz BAND

#### IN-BAND REFERENCE LEVEL

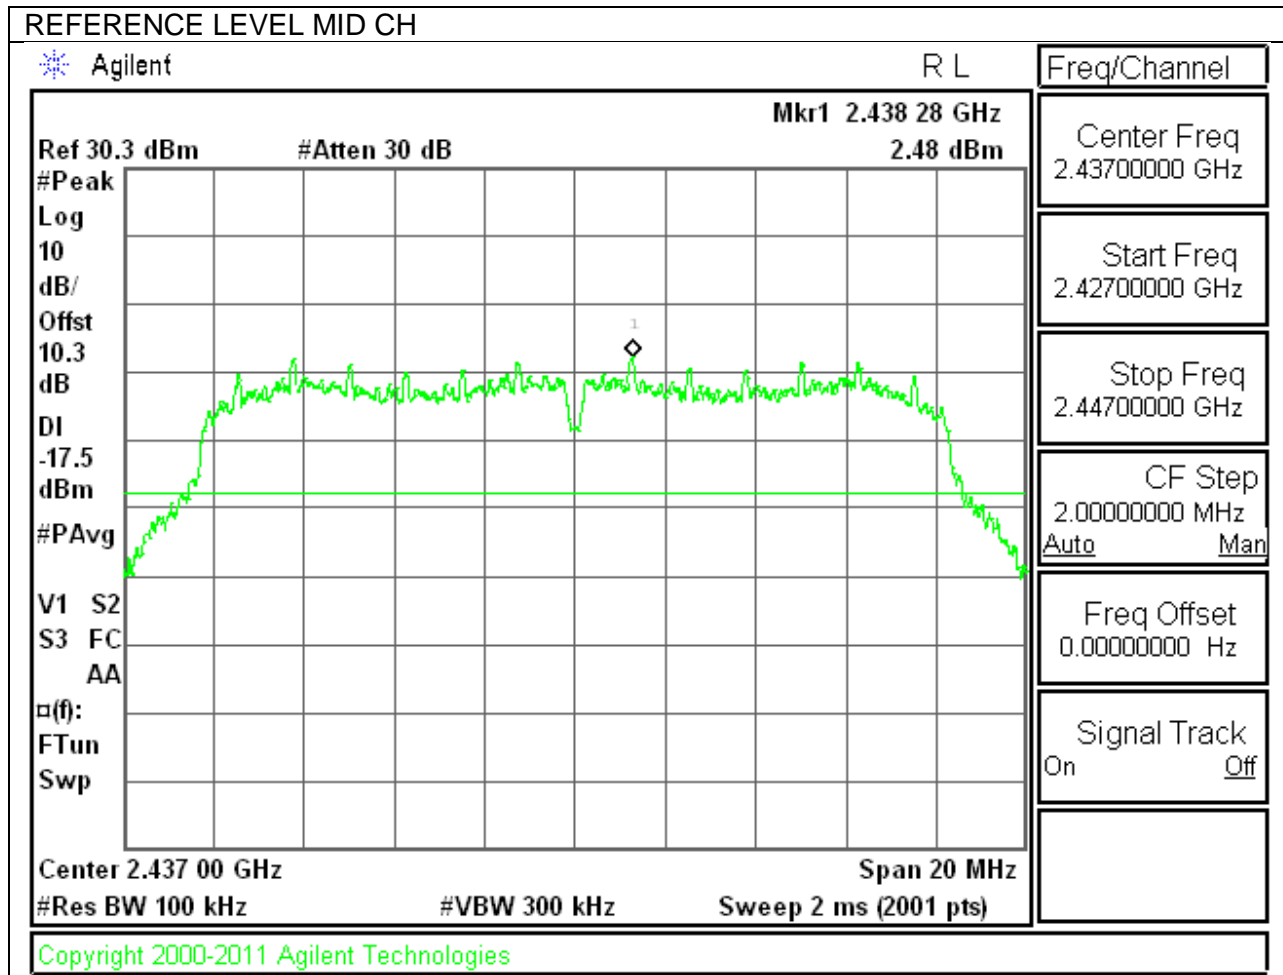



**LOW CHANNEL BANDEDGE**

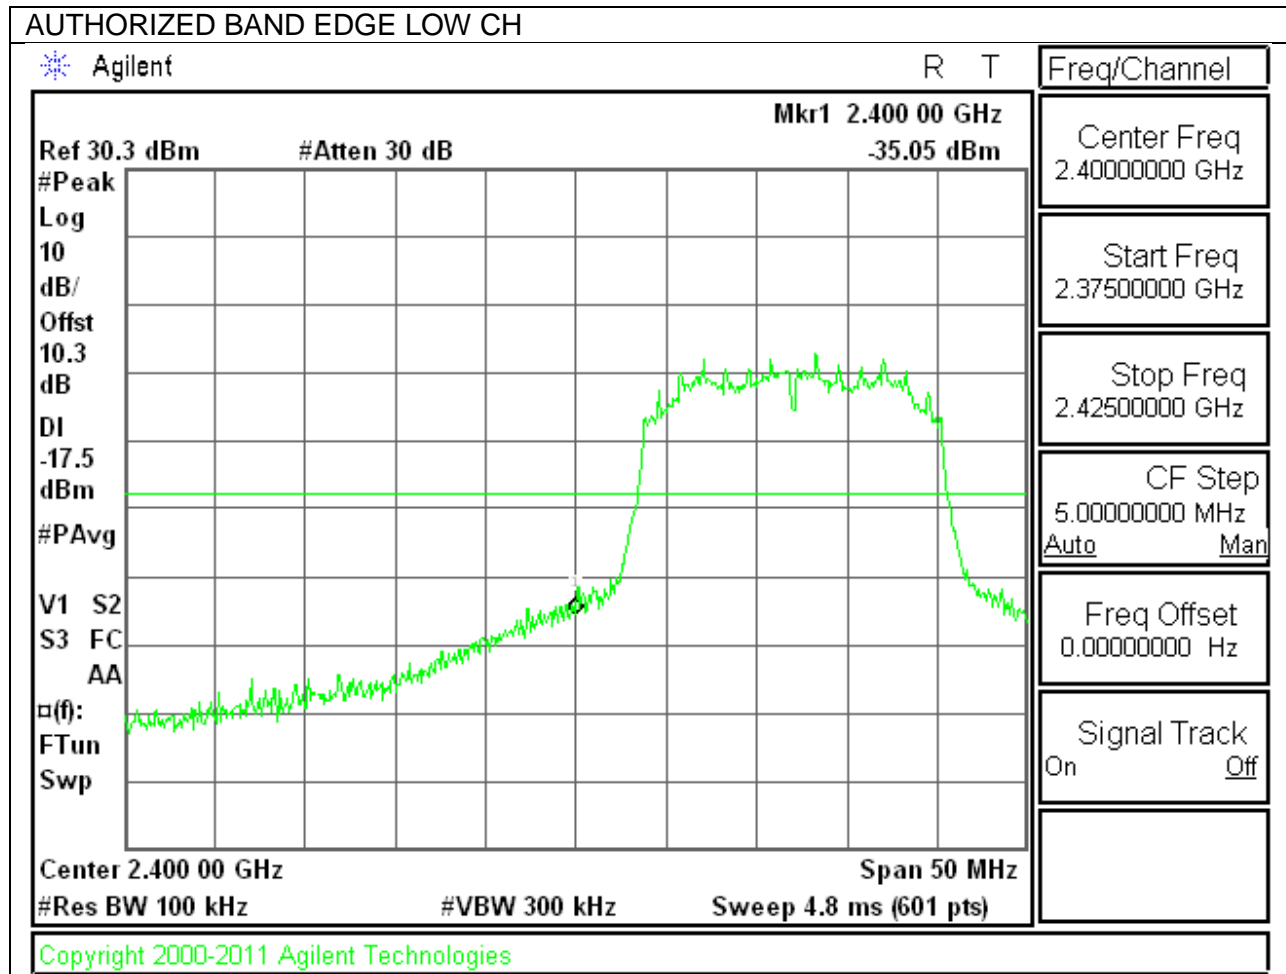




**OUT-OF-BAND EMISSIONS**

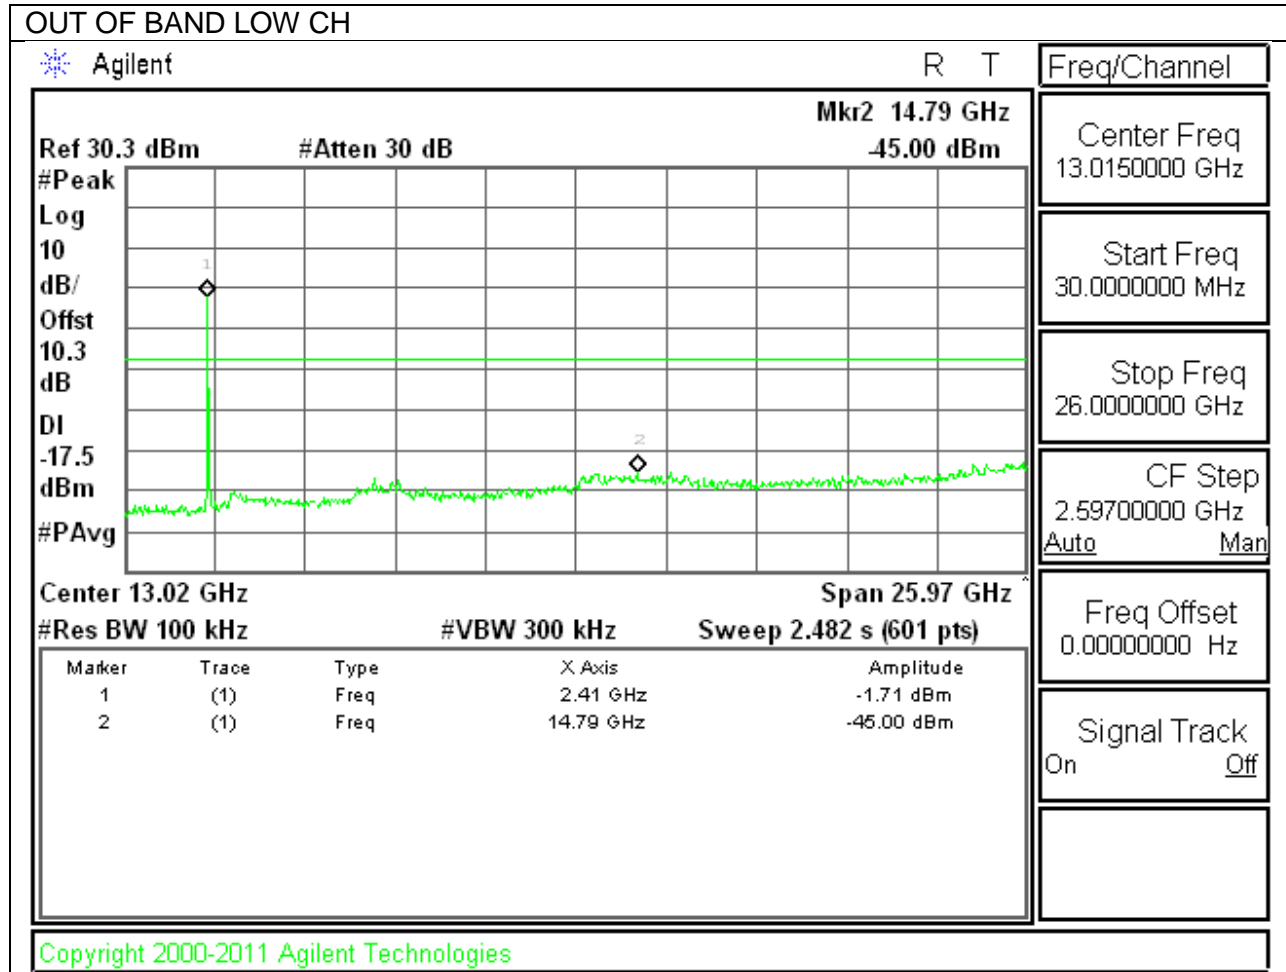


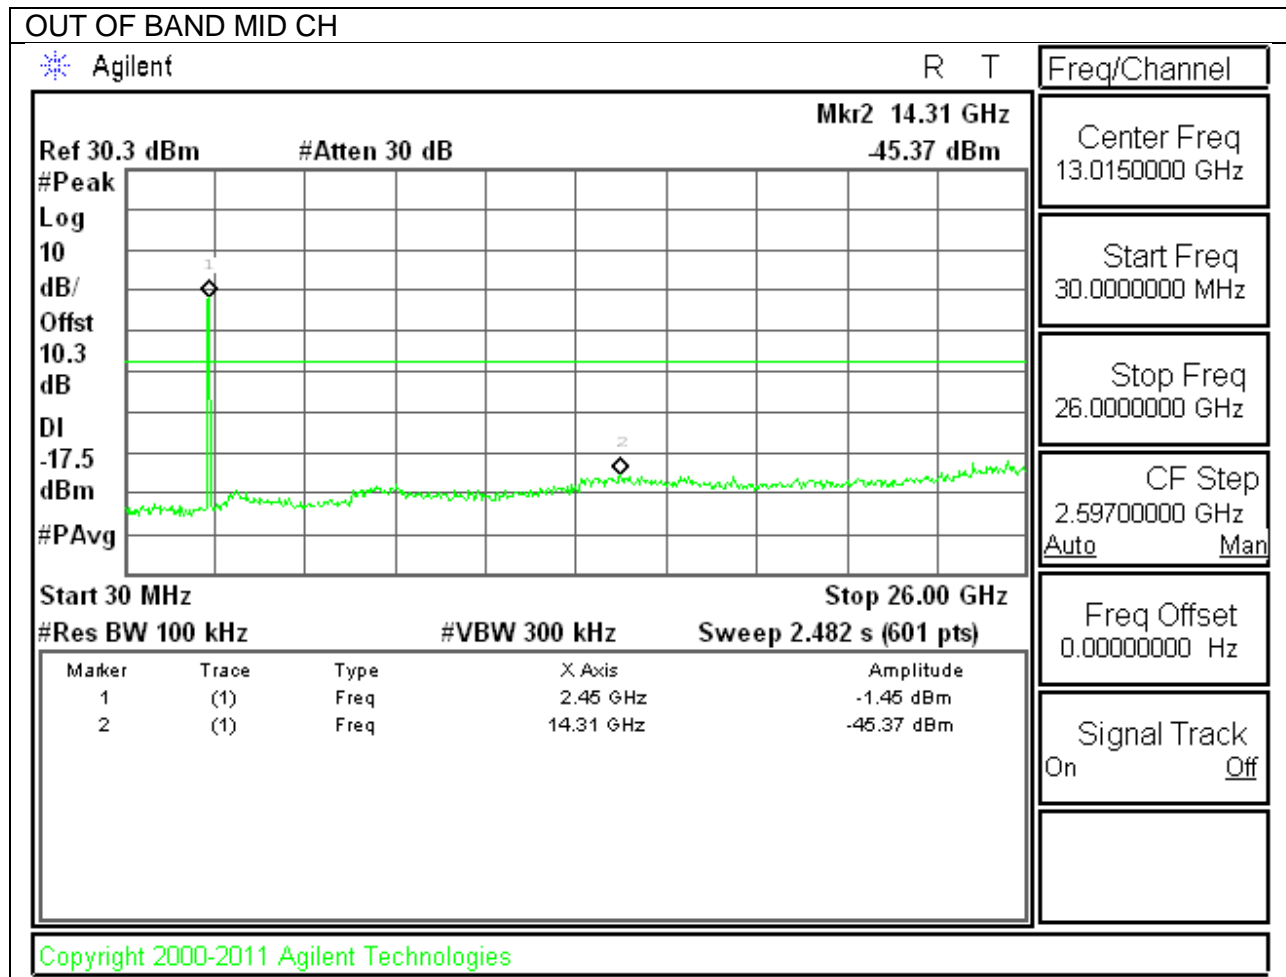

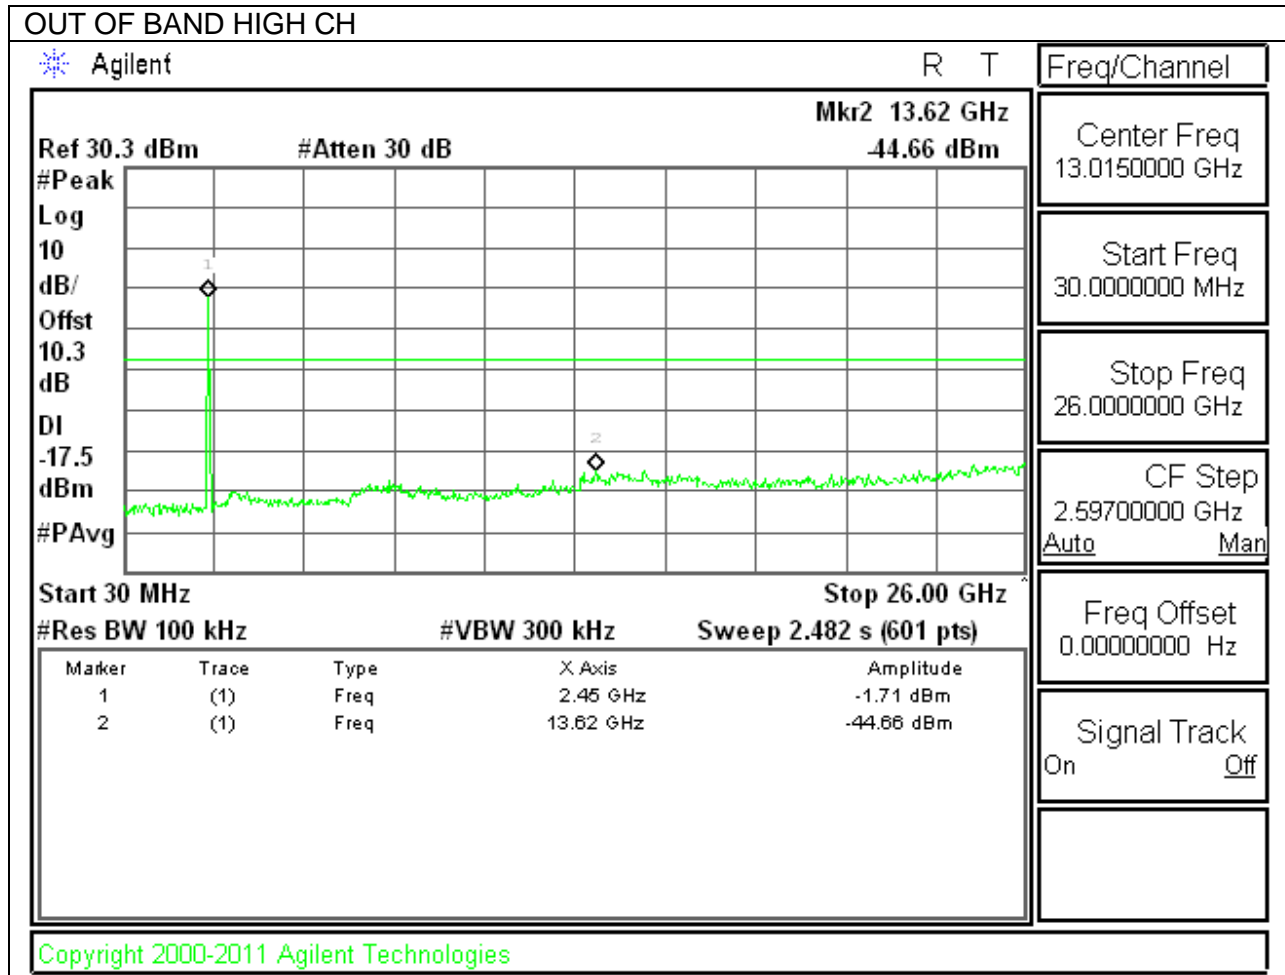


### 9.6.3. 802.11n MODE IN THE 2.4 GHz BAND


#### IN-BAND REFERENCE LEVEL

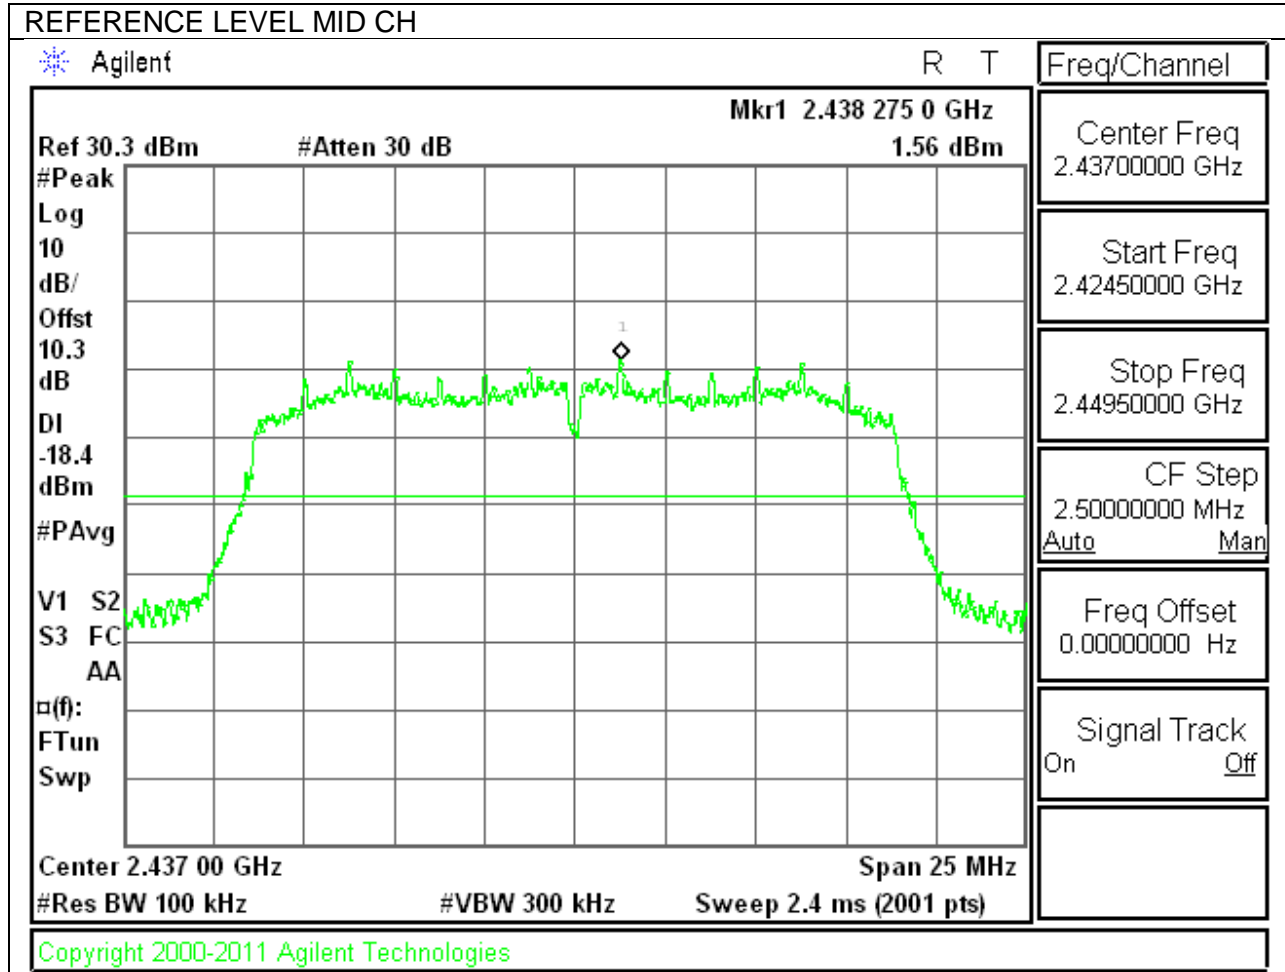


**LOW CHANNEL BANDEDGE**

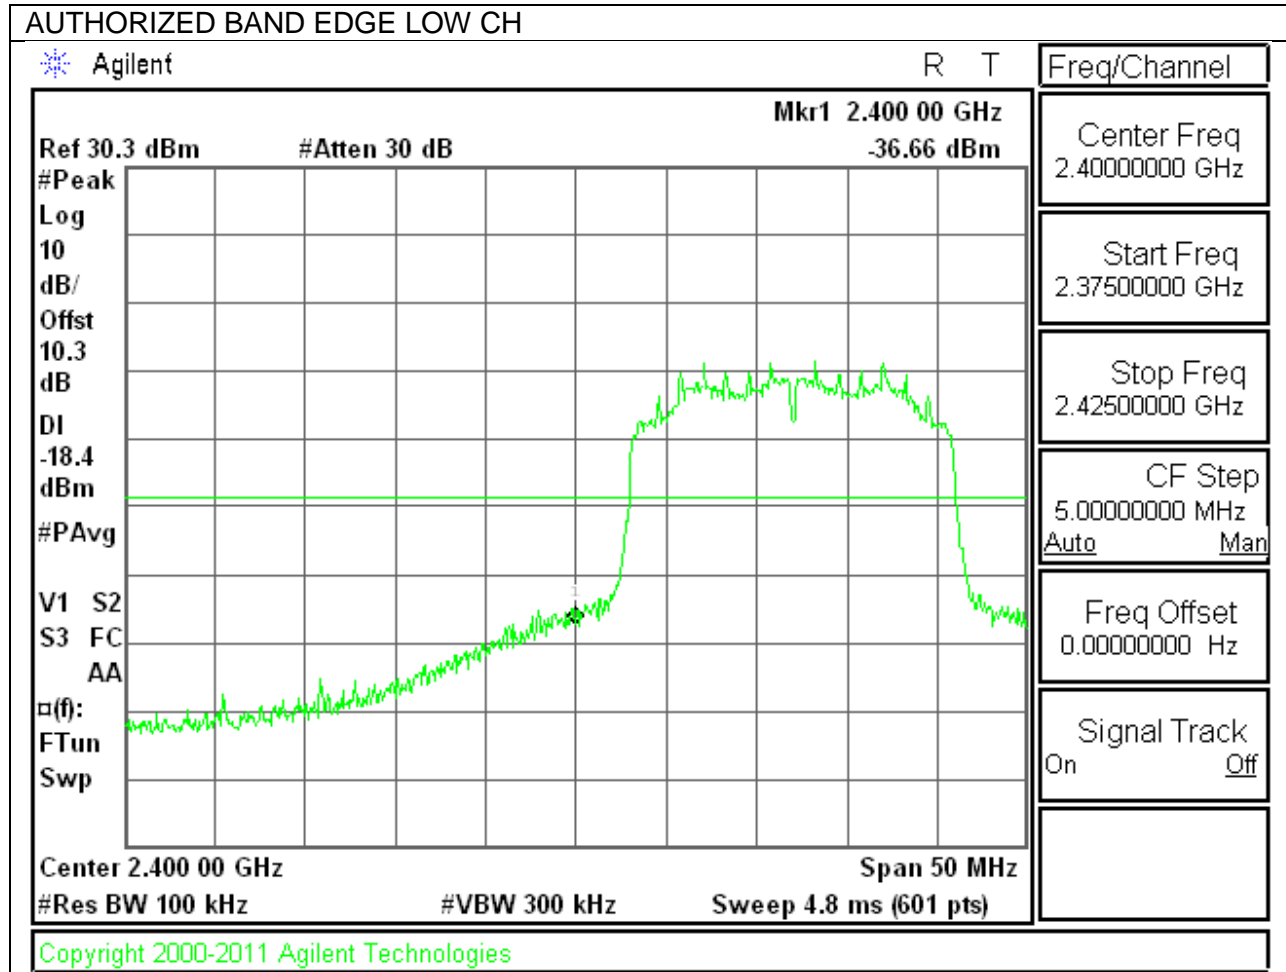



**HIGH CHANNEL BANDEDGE**

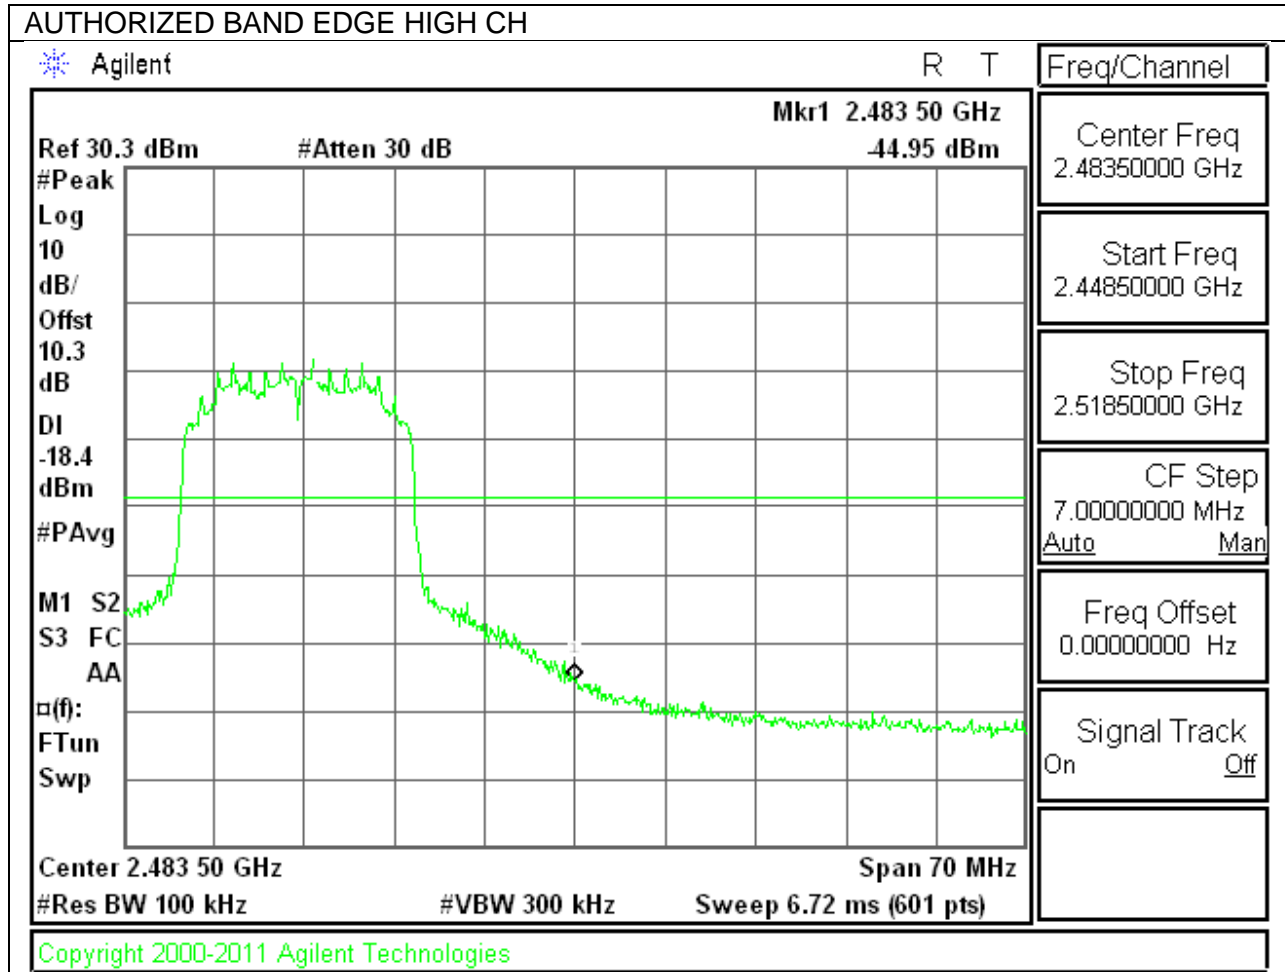

**OUT-OF-BAND EMISSIONS**

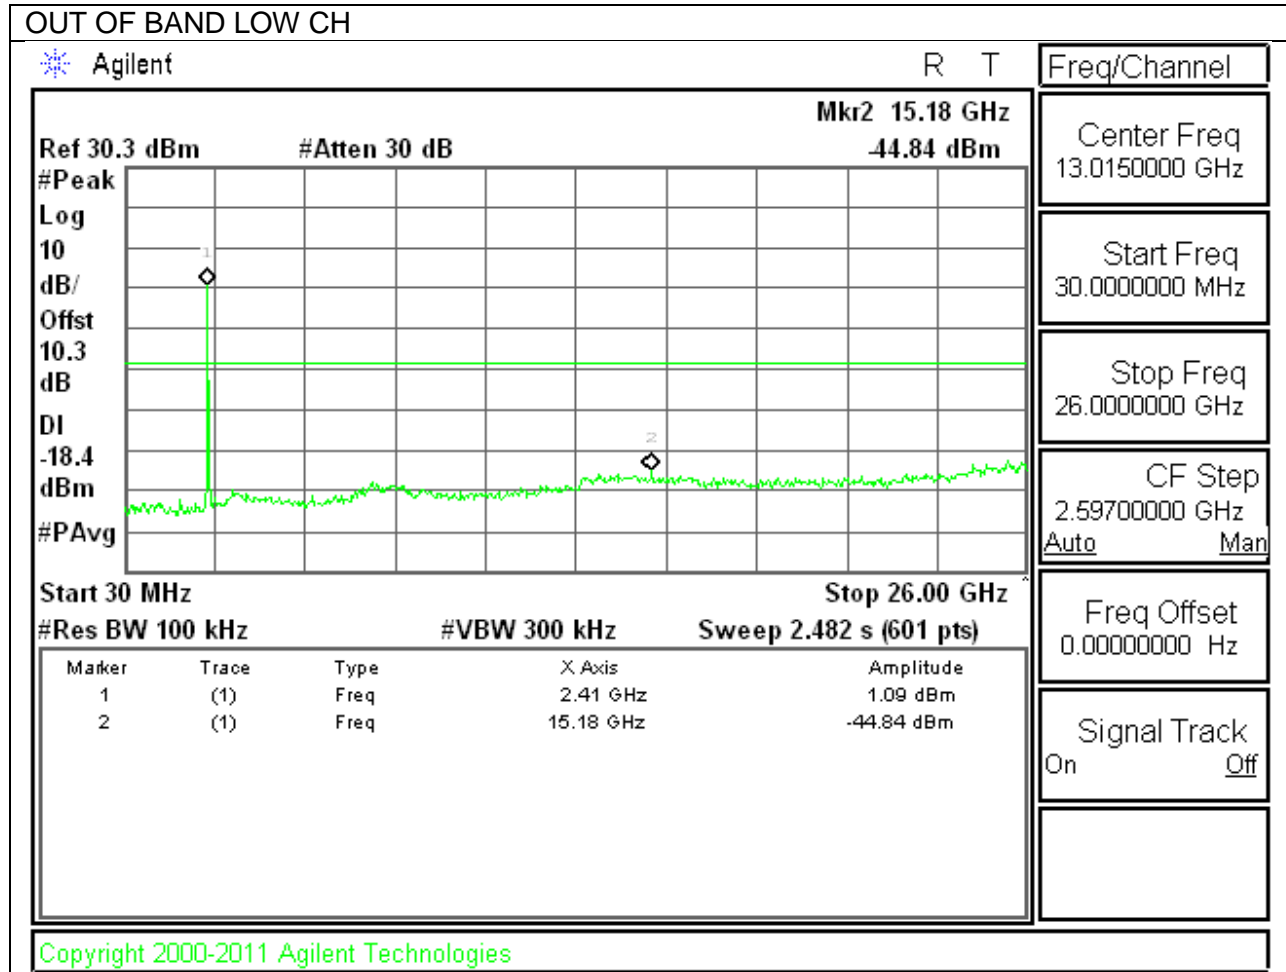

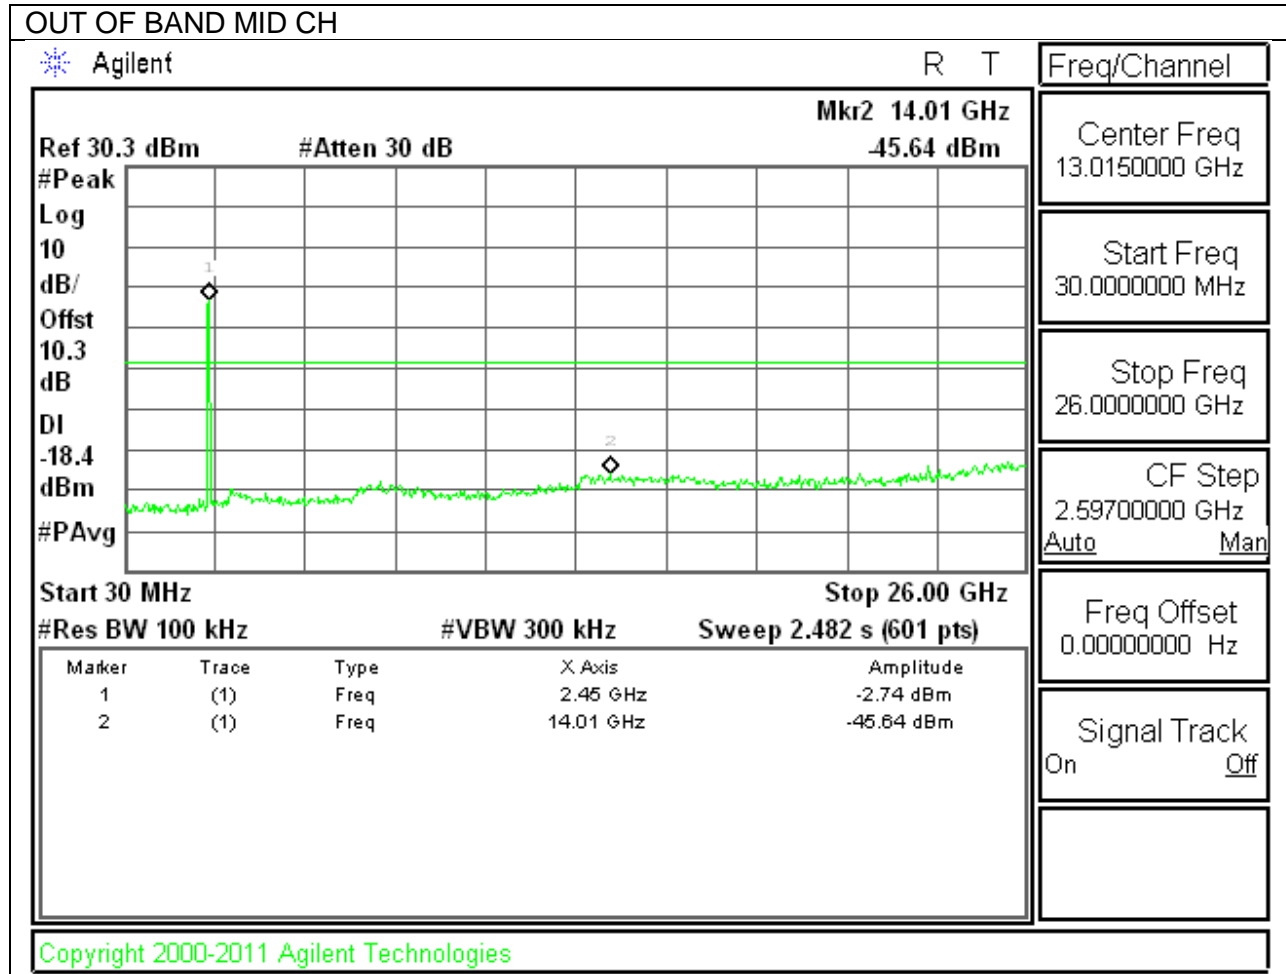

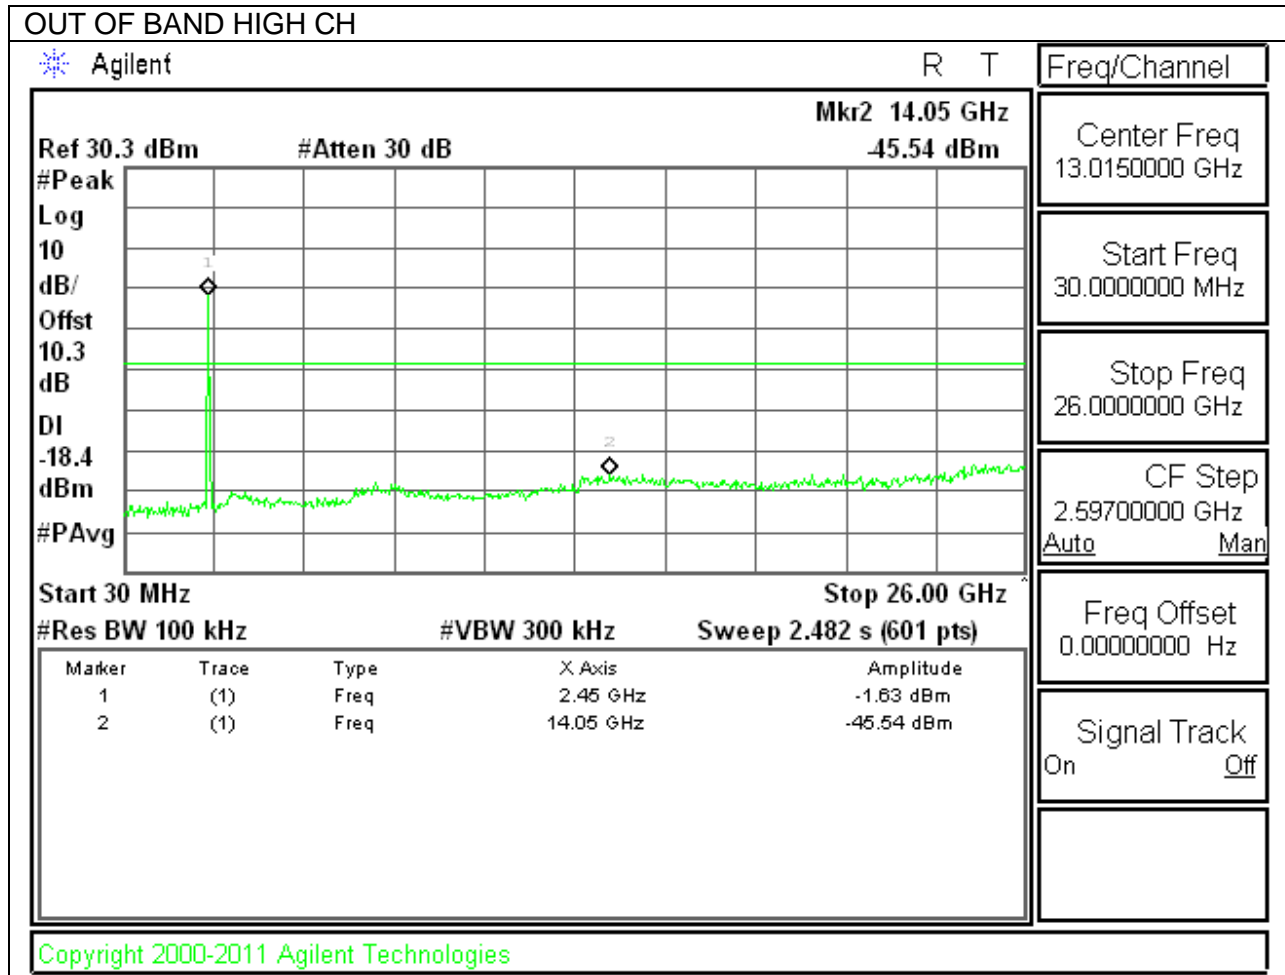

## 10. RADIATED TEST RESULTS

### 10.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor=  $10\log(1/x)$  For this sample B mode = 0dB (duty cycle >98%); G mode = 0.4dB; N mode = 0.4dB.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 10.2. TRANSMITTER ABOVE 1 GHz

### 10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

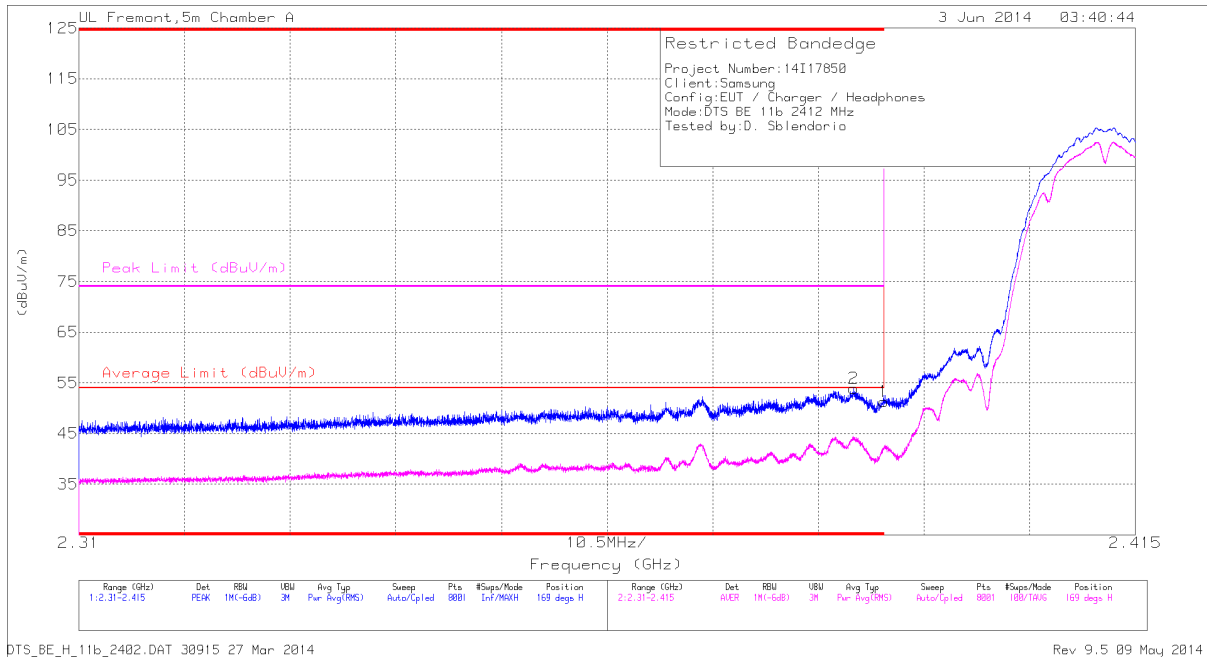


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.49	PK	32.2	-24.4	51.29	-	-	74	-22.71	169	227	H
2	* 2.387	45.79	PK	32.2	-24.1	53.89	-	-	74	-20.11	169	227	H
3	* 2.39	34.5	RMS	32.2	-24.4	42.3	54	-11.7	-	-	169	227	H
4	* 2.387	36.37	RMS	32.2	-24.1	44.47	54	-9.53	-	-	169	227	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

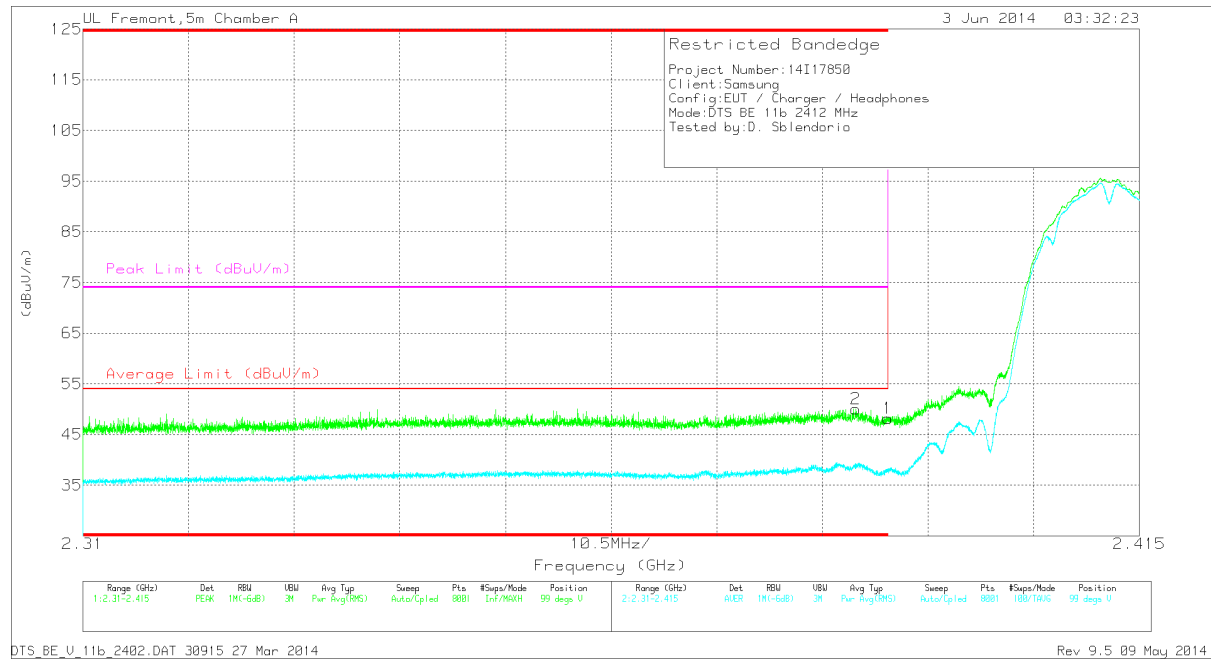

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.38	PK	32.2	-24.4	48.18	-	-	74	-25.82	99	214	V
2	* 2.387	42	PK	32.2	-24.1	50.1	-	-	74	-23.9	99	214	V
3	* 2.39	30.42	RMS	32.2	-24.4	38.22	54	-15.78	-	-	99	214	V
4	* 2.385	31.15	RMS	32.2	-23.9	39.45	54	-14.55	-	-	99	214	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

### AUTHORIZED BANDEDGE (HIGH CHANNEL)

#### HORIZONTAL

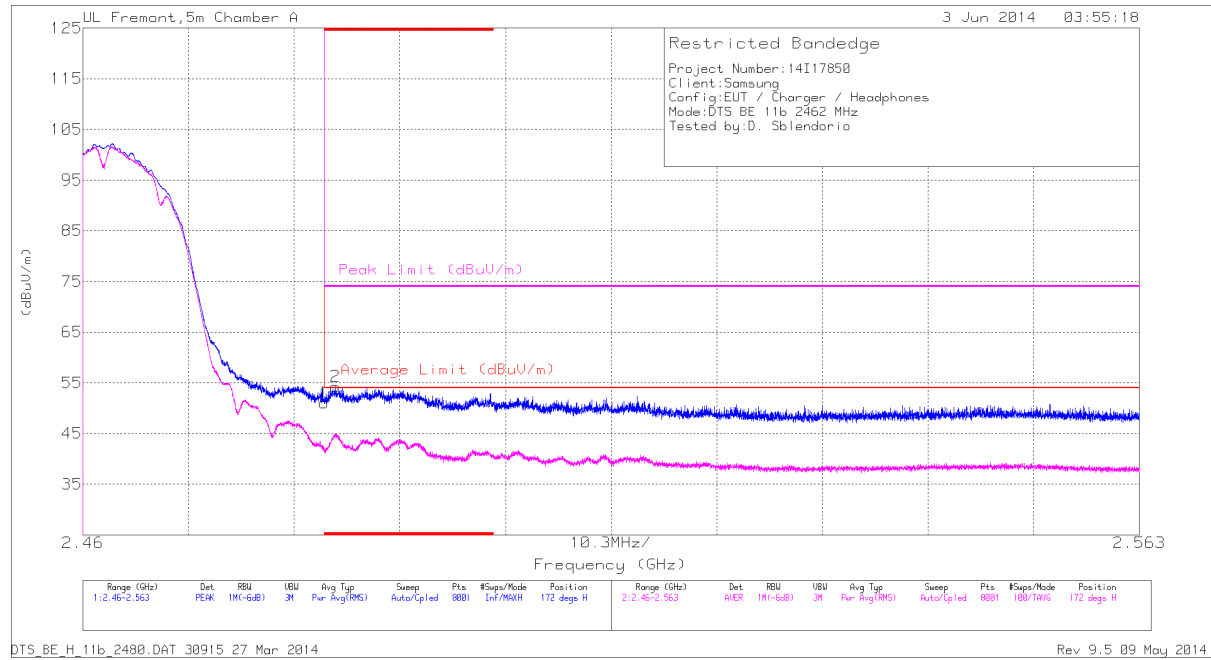


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.8	PK	32.7	-23.5	51	-	-	74	-23	172	277	H
2	* 2.485	45.1	PK	32.7	-23.5	54.3	-	-	74	-19.7	172	277	H
3	* 2.484	32.44	RMS	32.7	-23.5	41.64	54	-12.36	-	-	172	277	H
4	* 2.485	35.75	RMS	32.7	-23.5	44.95	54	-9.05	-	-	172	277	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

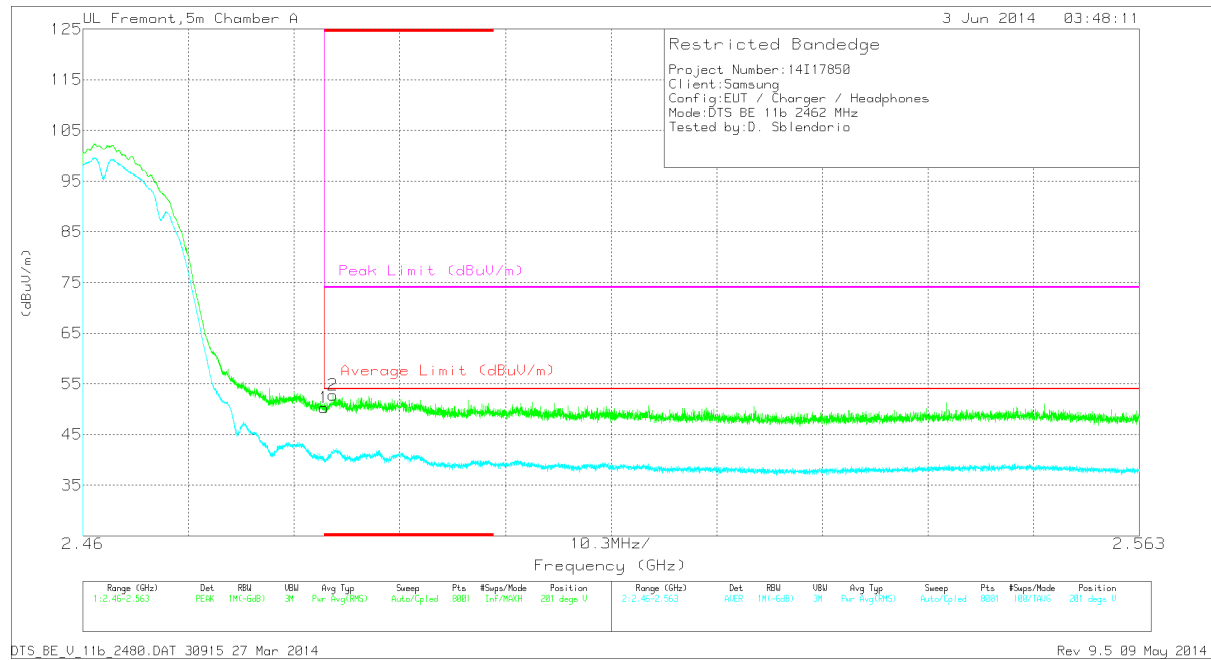


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.12	PK	32.7	-23.5	50.32	-	-	74	-23.68	201	356	V
2	* 2.484	43.55	PK	32.7	-23.5	52.75	-	-	74	-21.25	201	356	V
3	* 2.484	31.04	RMS	32.7	-23.5	40.24	54	-13.76	-	-	201	356	V
4	* 2.485	33	RMS	32.7	-23.5	42.2	54	-11.8	-	-	201	356	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

RMS - RMS detection

### HARMONICS AND SPURIOUS EMISSIONS

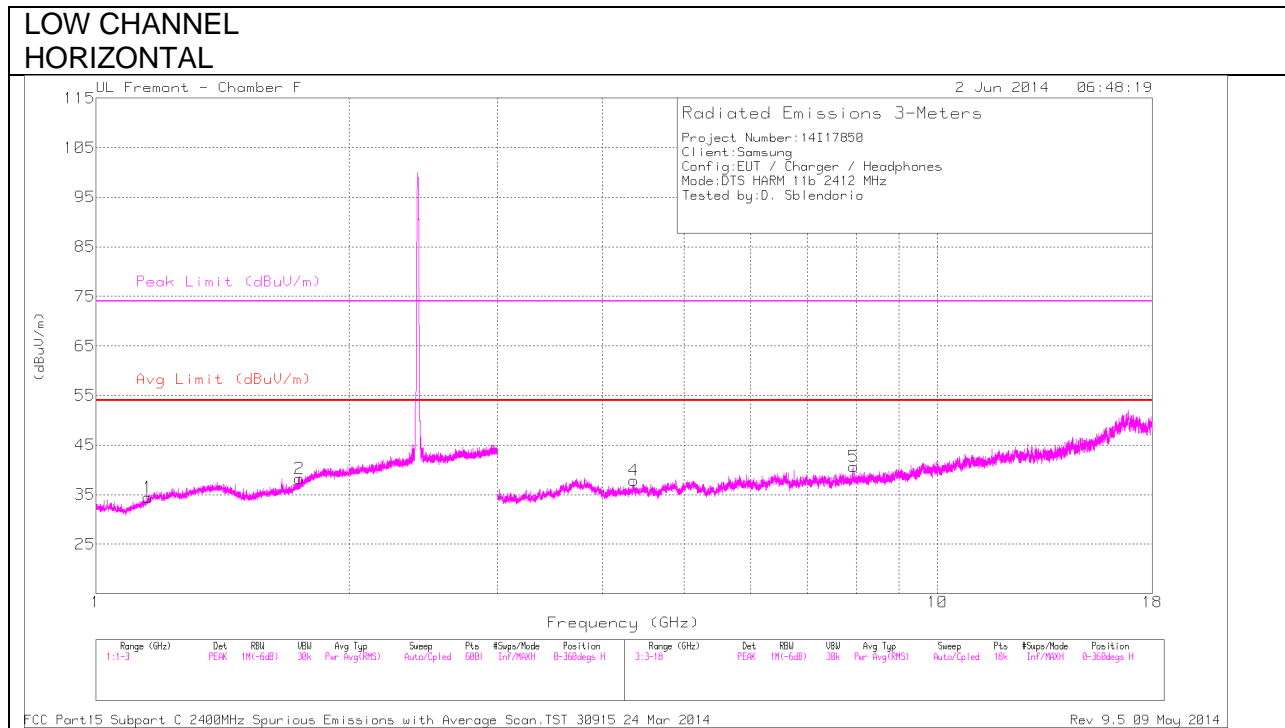

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

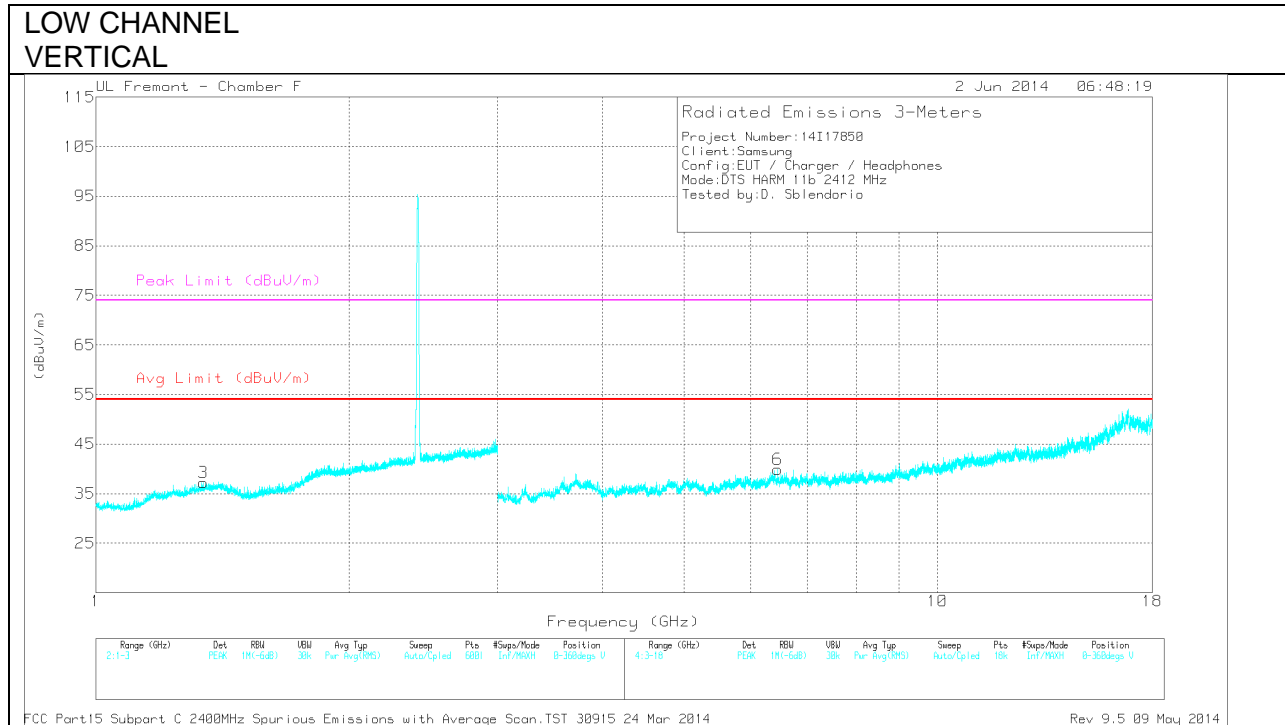

**Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.**

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.153	32.88	PK	28.3	-26.8	34.38	-	-	74	-39.62	0-360	201	H
2	1.746	33.95	PK	29.7	-25.4	38.25	-	-	-	-	0-360	201	H
3	* 1.341	33.97	PK	29.7	-26.5	37.17	-	-	74	-36.83	0-360	101	V
4	* 4.359	33.37	PK	33.8	-29.3	37.87	-	-	74	-36.13	0-360	200	H
5	7.958	30.05	PK	35.7	-25.1	40.65	-	-	-	-	0-360	101	H
6	6.459	31.56	PK	35.6	-27.3	39.86	-	-	-	-	0-360	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.342	41.51	PK2	29.7	-26.5	44.71	-	-	74	-29.29	2	101	V
* 1.34	30.57	MAV1	29.7	-26.6	33.67	54	-20.33	-	-	2	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL  
 HORIZONTAL

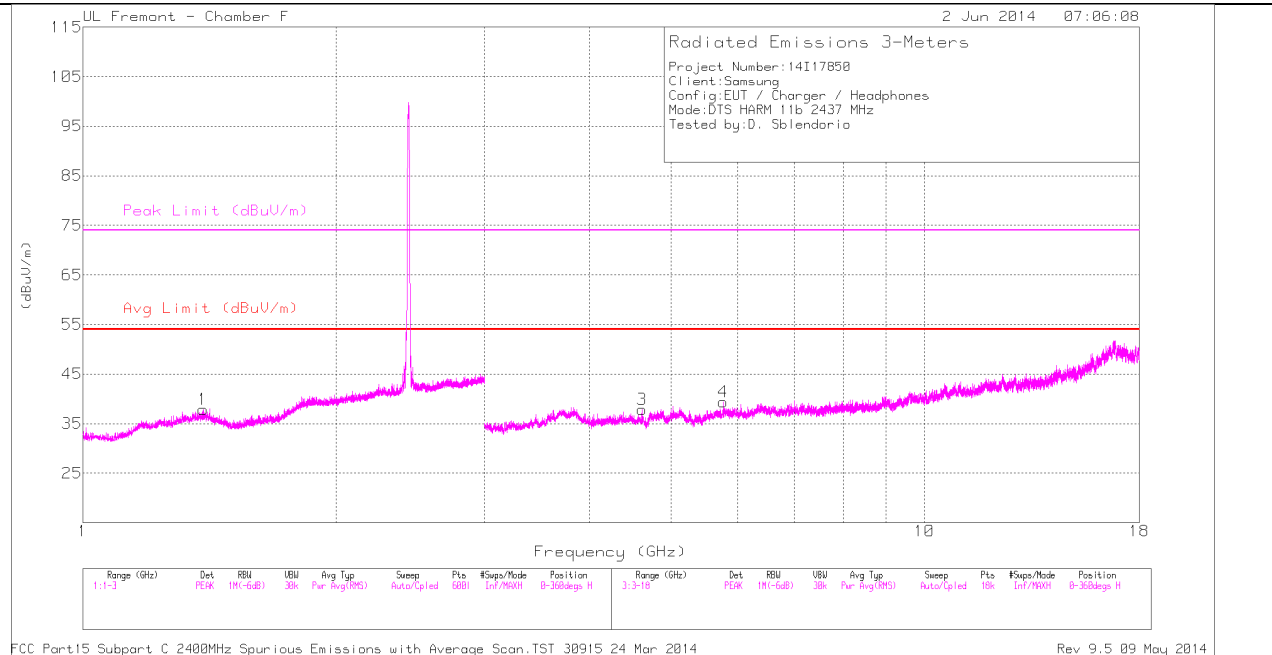

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL  
 VERTICAL

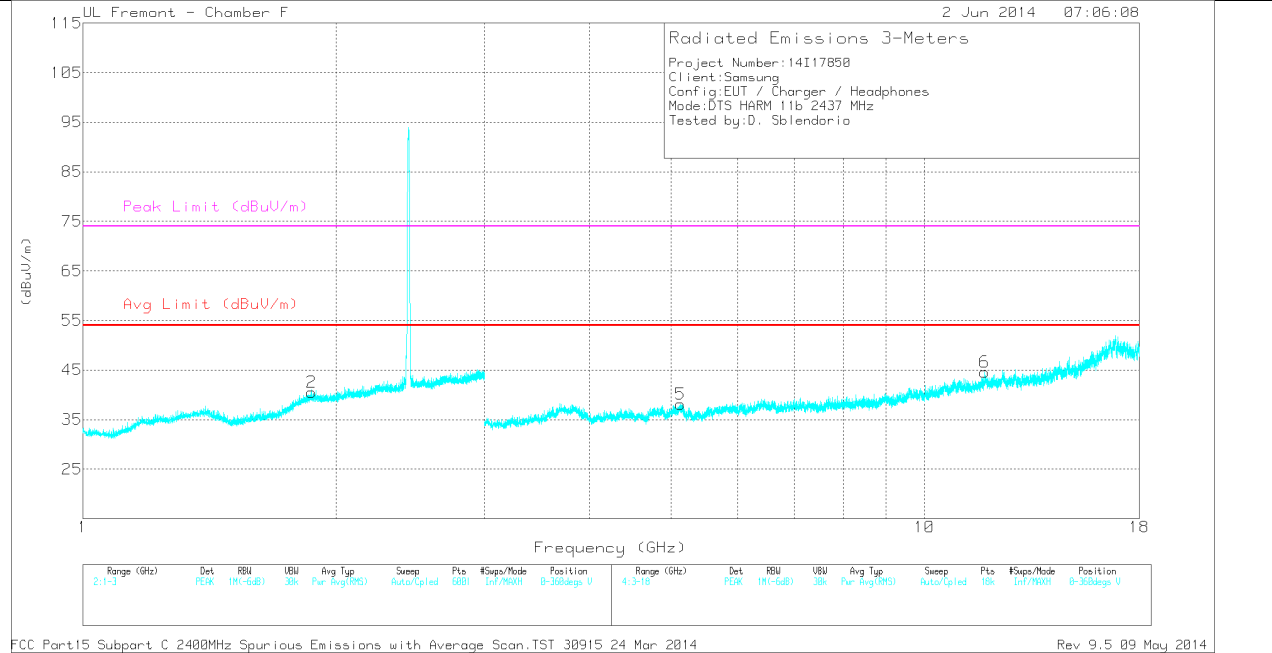

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.39	34.23	PK	29.3	-25.7	37.83	-	-	74	-36.17	0-360	101	H
2	1.871	33.8	PK	31.1	-24.4	40.5	-	-	-	-	0-360	101	V
3	* 4.622	32.61	PK	34.1	-28.9	37.81	-	-	74	-36.19	0-360	200	H
4	5.764	31.85	PK	34.9	-27.4	39.35	-	-	-	-	0-360	200	H
5	* 5.129	30.95	PK	34.4	-27.2	38.15	-	-	74	-35.85	0-360	201	V
6	* 11.783	27.69	PK	38.7	-21.8	44.59	-	-	74	-29.41	0-360	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.623	38.56	PK2	34.1	-28.9	43.76	-	-	74	-30.24	0	201	H
* 4.62	27.91	MAV1	34.1	-28.9	33.11	54	-20.89	-	-	0	201	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

**HIGH CHANNEL  
 HORIZONTAL**

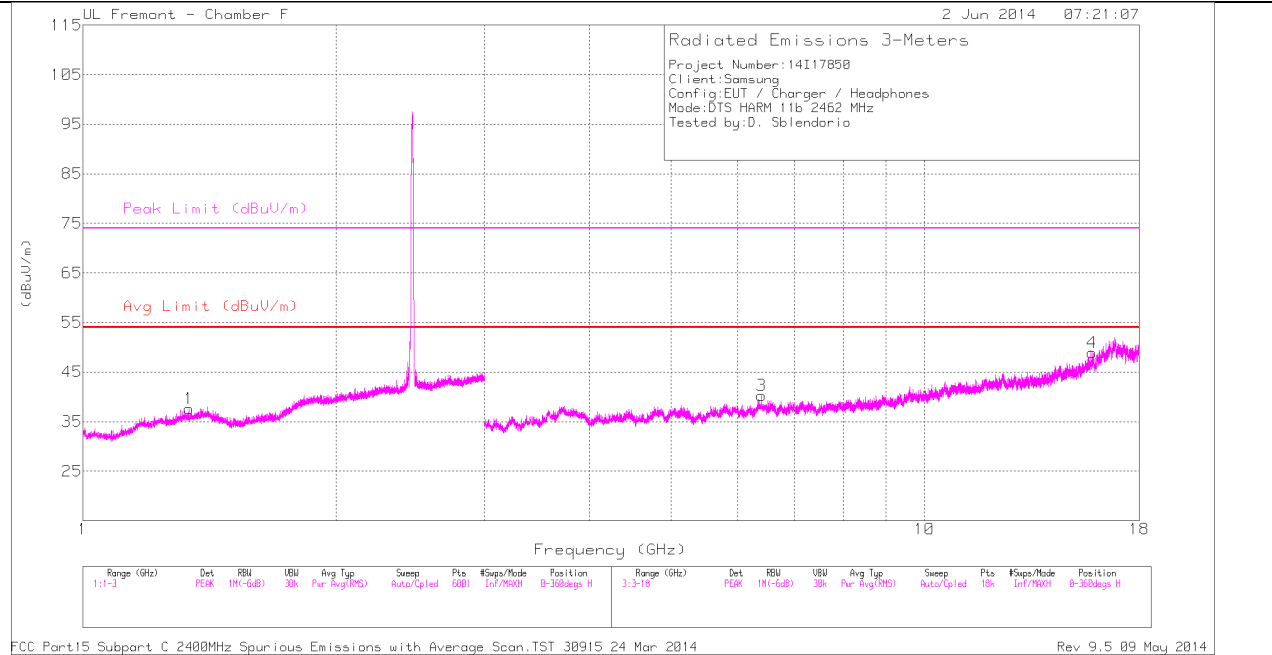

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL  
 VERTICAL**

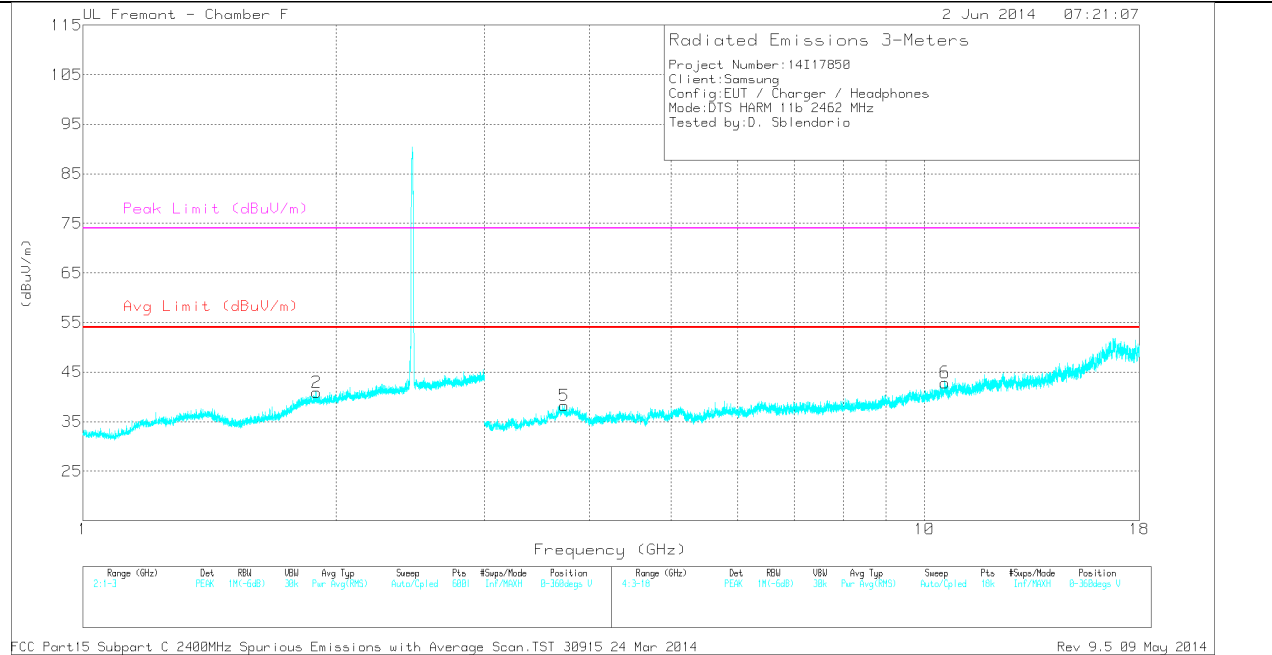

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.337	34.4	PK	29.8	-26.6	37.6	-	-	74	-36.4	0-360	201	H
2	1.895	34.03	PK	31.4	-24.5	40.93	-	-	-	-	0-360	101	V
3	6.398	32	PK	35.6	-27.3	40.3	-	-	-	-	0-360	101	H
4	* 15.823	28.68	PK	40.4	-20.2	48.88	-	-	74	-25.12	0-360	201	H
5	* 3.732	32.93	PK	34.7	-29.4	38.23	-	-	74	-35.77	0-360	200	V
6	10.58	26.17	PK	37.8	-21.1	42.87	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 15.824	36.15	PK2	40.4	-20.3	56.25	-	-	74	-17.75	0	202	H
* 15.824	25.33	MAV1	40.4	-20.3	45.43	54	-8.57	-	-	0	202	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

## 10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

### HORIZONTAL

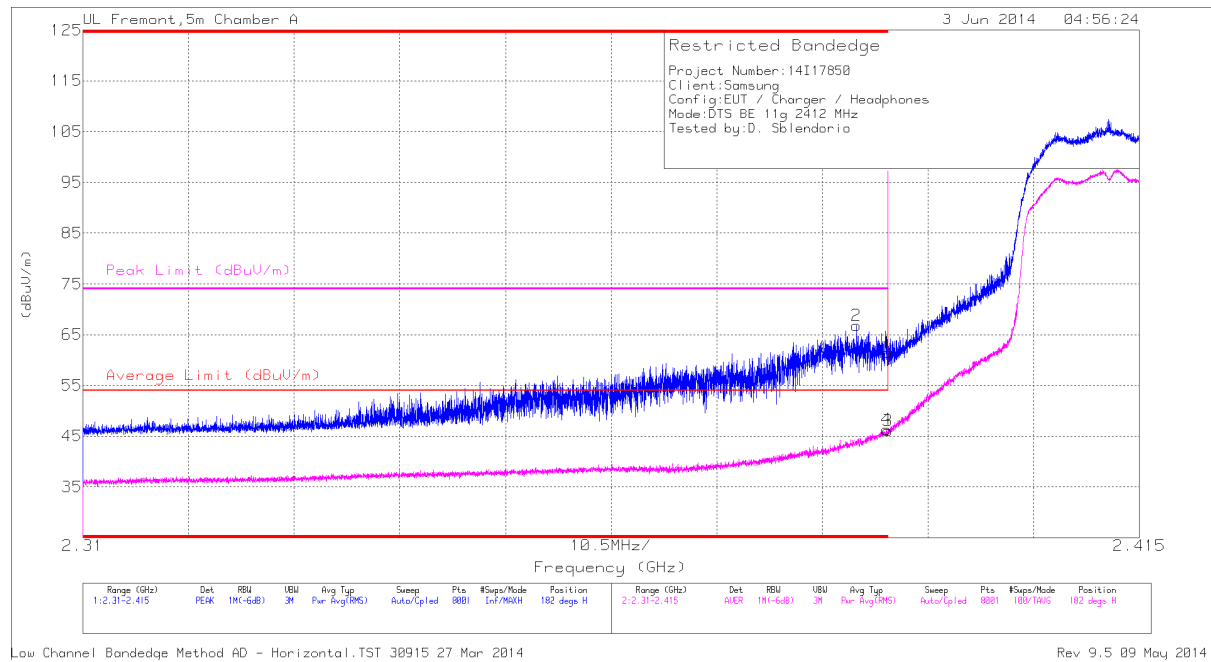


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	53.62	PK	32.2	-24.4	0	61.42	-	-	74	-12.58	182	284	H
2	* 2.387	58.7	PK	32.2	-24.1	0	66.8	-	-	74	-7.2	182	284	H
3	* 2.39	37.83	RMS	32.2	-24.4	.4	46.03	54	-7.97	-	-	182	284	H
4	* 2.39	38.08	RMS	32.2	-24.4	.4	46.28	54	-7.72	-	-	182	284	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

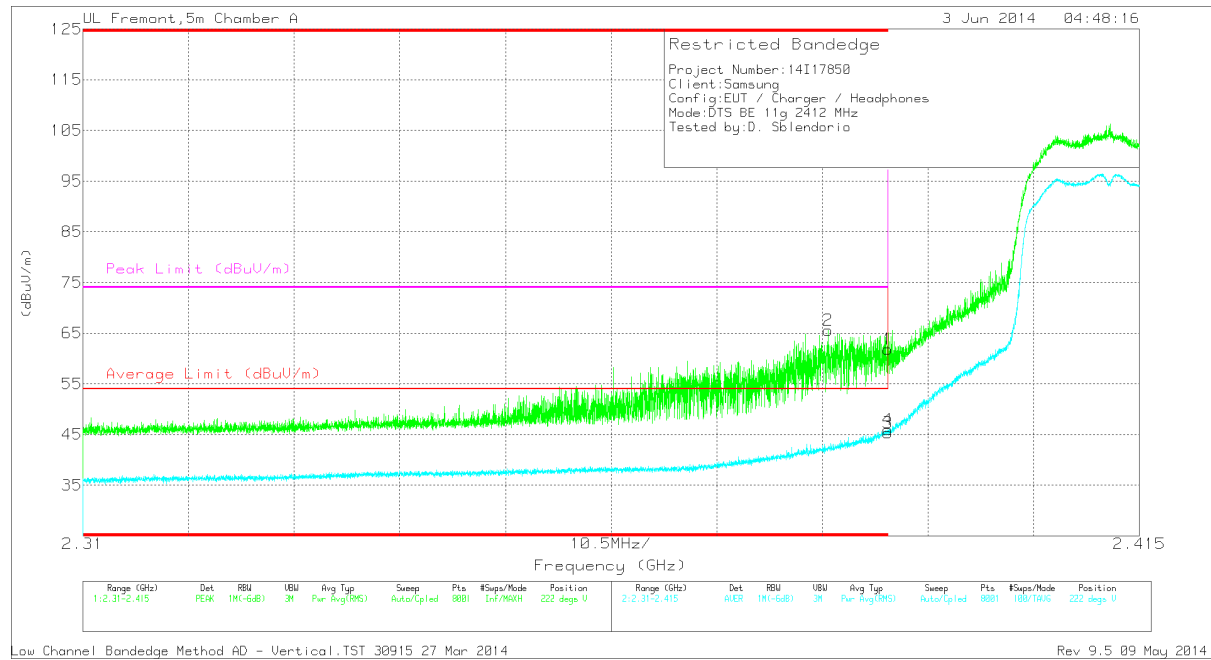

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	54.02	PK	32.2	-24.4	0	61.82	-	-	74	-12.18	222	356	V
2	* 2.384	57.19	PK	32.2	-23.8	0	65.59	-	-	74	-8.41	222	356	V
3	* 2.39	37.08	RMS	32.2	-24.4	.4	45.28	54	-8.72	-	-	222	356	V
4	* 2.39	37.69	RMS	32.2	-24.4	.4	45.89	54	-8.11	-	-	222	356	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

**AUTHORIZED BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL**

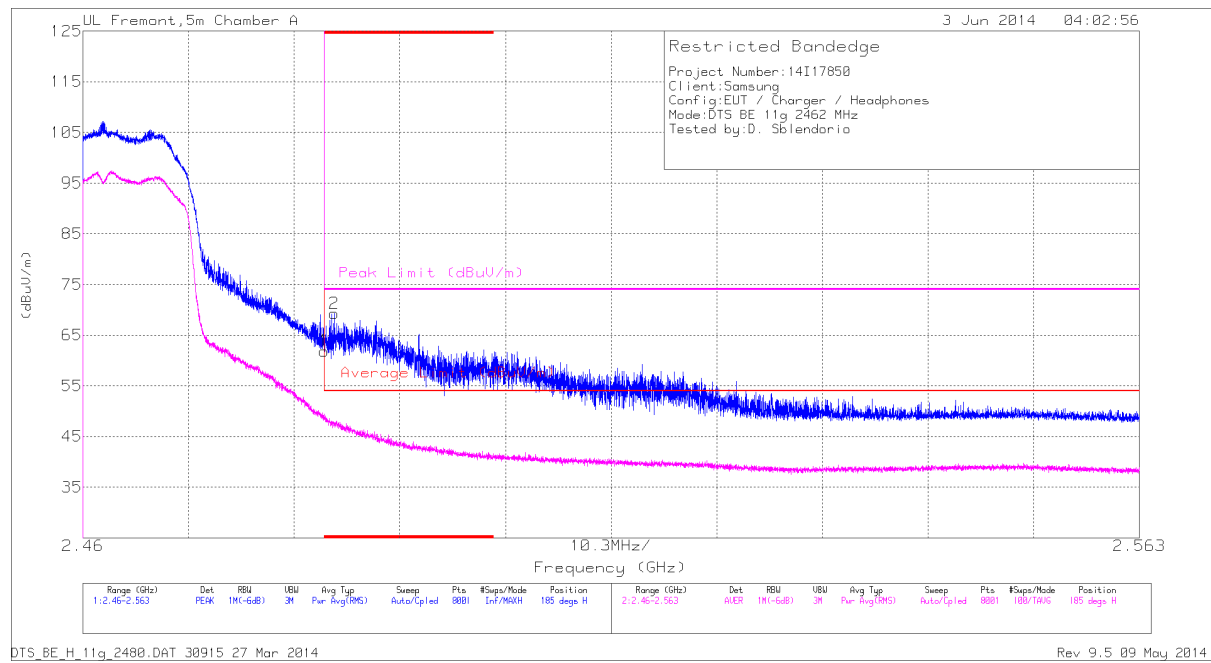


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	52.7	PK	32.7	-23.5	0	61.9	-	-	74	-12.1	185	339	H
2	* 2.485	60.1	PK	32.7	-23.5	0	69.3	-	-	74	-4.7	185	339	H
3	* 2.484	38.98	RMS	32.7	-23.5	.4	48.58	54	-5.42	-	-	185	339	H
4	* 2.484	39.8	RMS	32.7	-23.5	.4	49.4	54	-4.6	-	-	185	339	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

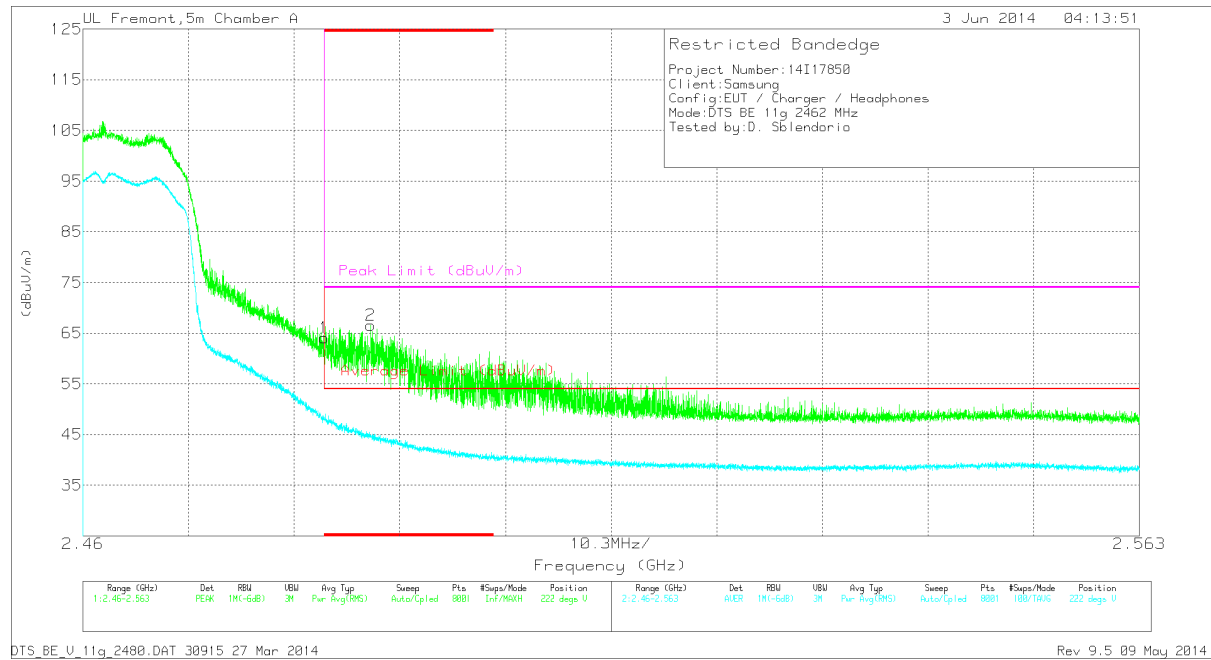


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fl tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	54.9	PK	32.7	-23.5	0	64.1	-	-	74	-9.9	222	346	V
2	* 2.488	57.15	PK	32.8	-23.4	0	66.55	-	-	74	-7.45	222	346	V
3	* 2.484	38.33	RMS	32.7	-23.5	.4	47.93	54	-6.07	-	-	222	346	V
4	* 2.484	39.44	RMS	32.7	-23.5	.4	49.04	54	-4.96	-	-	222	346	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

### HARMONICS AND SPURIOUS EMISSIONS

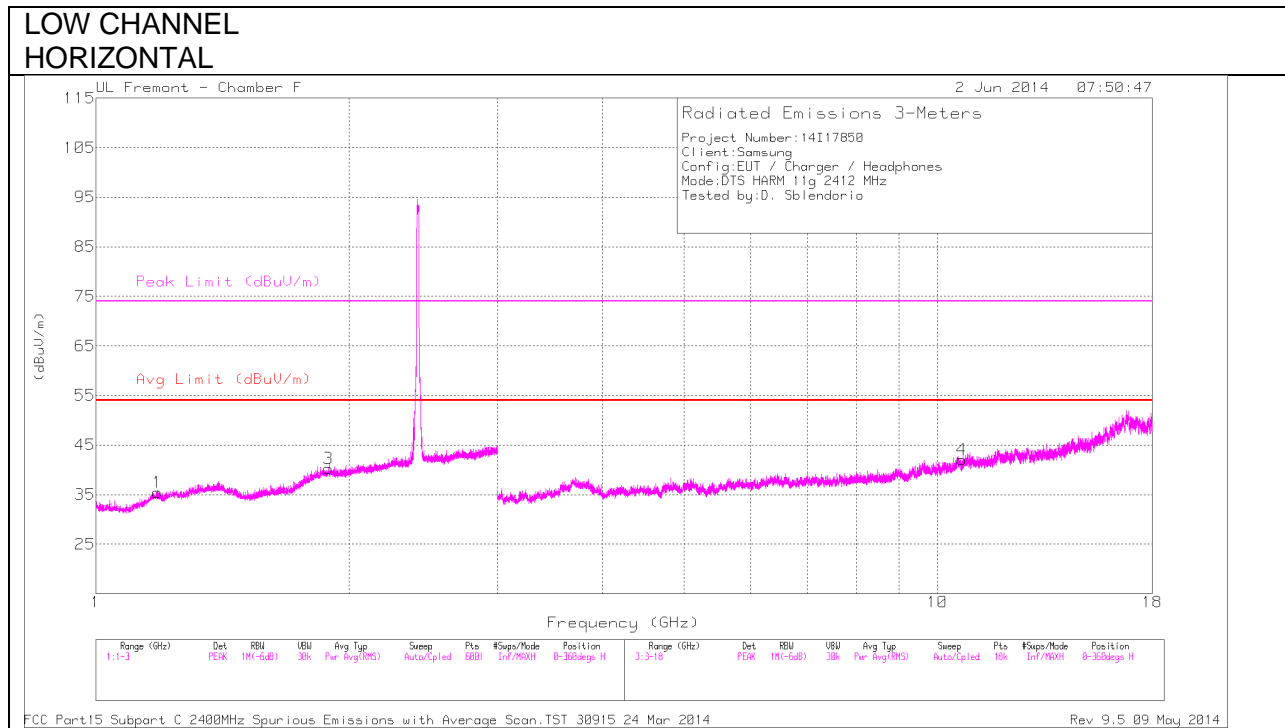

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL  
 VERTICAL**

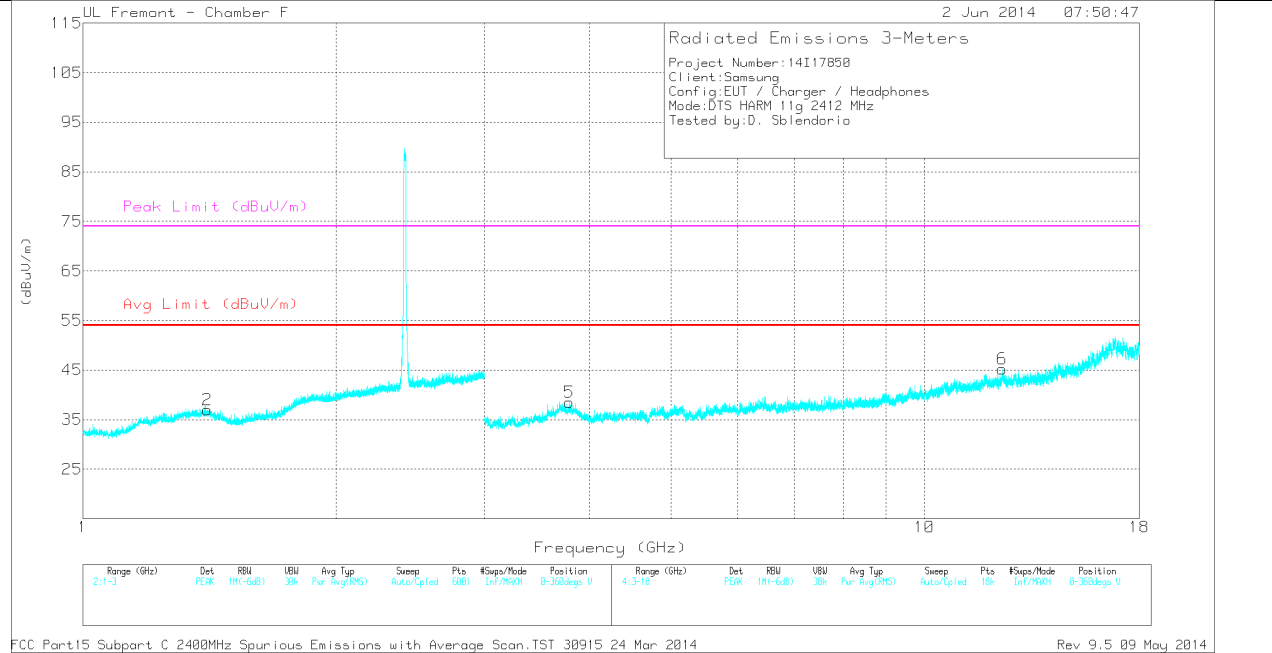

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.183	33.06	PK	28.7	-26.3	0	35.46	-	-	74	-38.54	0-360	202	H
3	1.89	33.52	PK	31.3	-24.5	0	40.32	-	-	-	-	0-360	202	H
2	* 1.405	33.24	PK	29.2	-25.5	0	36.94	-	-	74	-37.06	0-360	101	V
4	* 10.694	26.61	PK	38.1	-22.7	0	42.01	-	-	74	-31.99	0-360	101	H
5	* 3.784	33.13	PK	34.5	-29.1	0	38.53	-	-	74	-35.47	0-360	199	V
6	* 12.369	27.29	PK	38.9	-21	0	45.19	-	-	74	-28.81	0-360	199	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T120 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 12.367	34.74	PK2	38.9	-21.1	0	52.54	-	-	74	-21.46	0	200	V
* 12.371	24.47	MAv1	38.9	-21.1	.4	42.67	54	-11.33	-	-	0	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL  
 HORIZONTAL

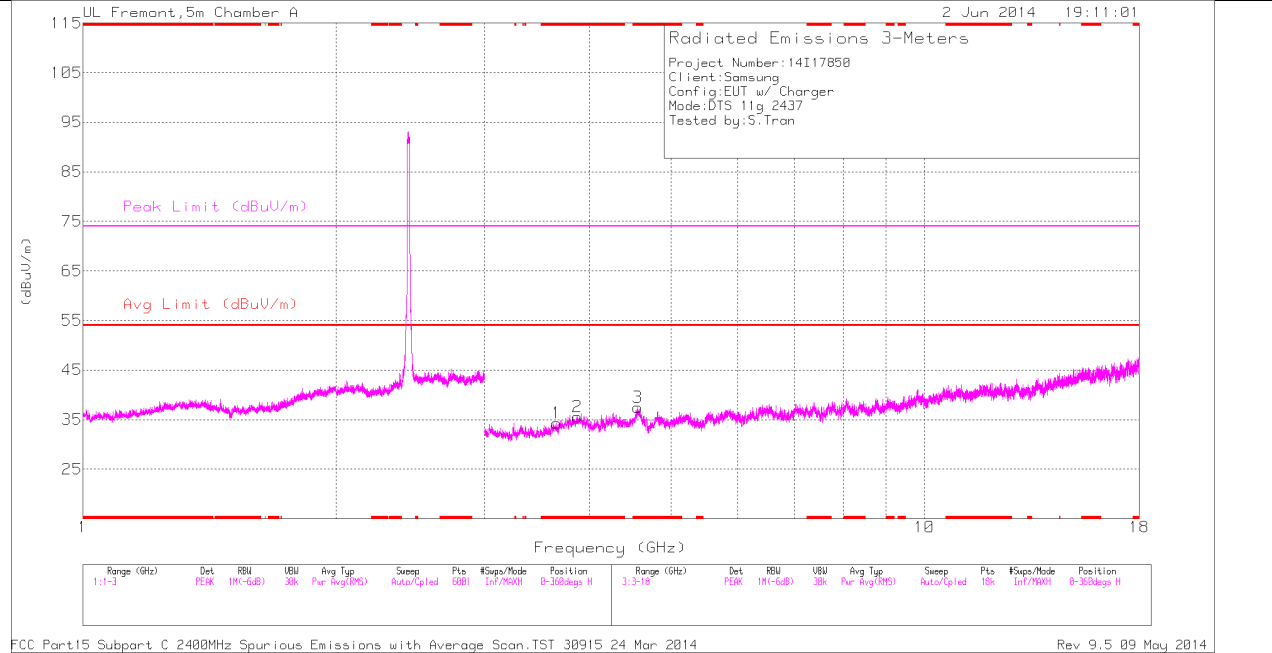

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL  
 VERTICAL

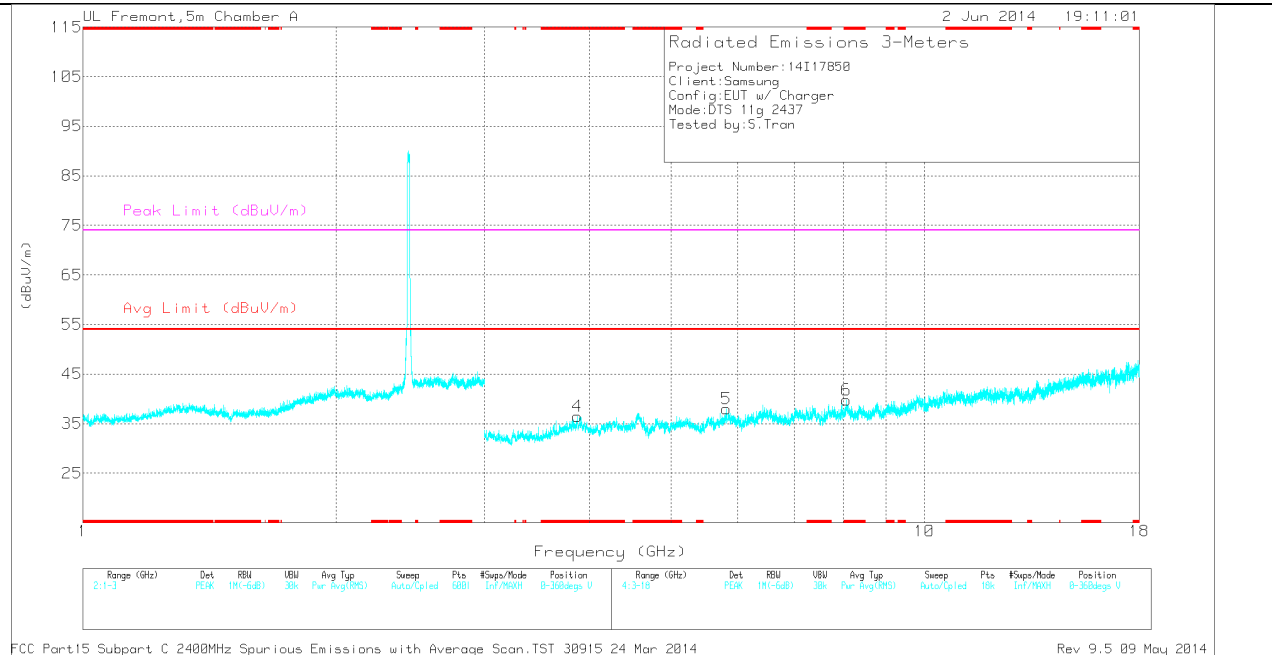

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.654	31.89	PK	33.3	-30.9	0	34.29	-	-	74	-39.71	0-360	100	H
2	* 3.866	32.62	PK	33.7	-30.7	0	35.62	-	-	74	-38.38	0-360	200	H
4	* 3.869	33.41	PK	33.7	-30.6	0	36.51	-	-	74	-37.49	0-360	201	V
3	* 4.564	31.89	PK	33.9	-28.3	0	37.49	-	-	74	-36.51	0-360	100	H
6	* 8.078	27.76	PK	35.5	-23.5	0	39.76	-	-	74	-34.24	0-360	100	V
5	5.811	32.13	PK	34.8	-29	0	37.93	-	-	-	-	0-360	100	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.655	39.67	PK2	33.3	-30.9	0	42.07	-	-	74	-31.93	359	100	H
* 3.867	40.75	PK2	33.7	-30.7	0	43.75	-	-	74	-30.25	359	201	H
* 4.563	39.22	PK2	33.9	-28.3	0	44.82	-	-	74	-29.18	359	100	H
* 3.87	40.67	PK2	33.7	-30.6	0	43.77	-	-	74	-30.23	359	201	V
* 8.079	35.06	PK2	35.5	-23.5	0	47.06	-	-	74	-26.94	359	100	V
* 8.078	24.34	MAV1	35.5	-23.4	.4	36.84	54	-17.16	-	-	359	100	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

**HIGH CHANNEL  
 HORIZONTAL**

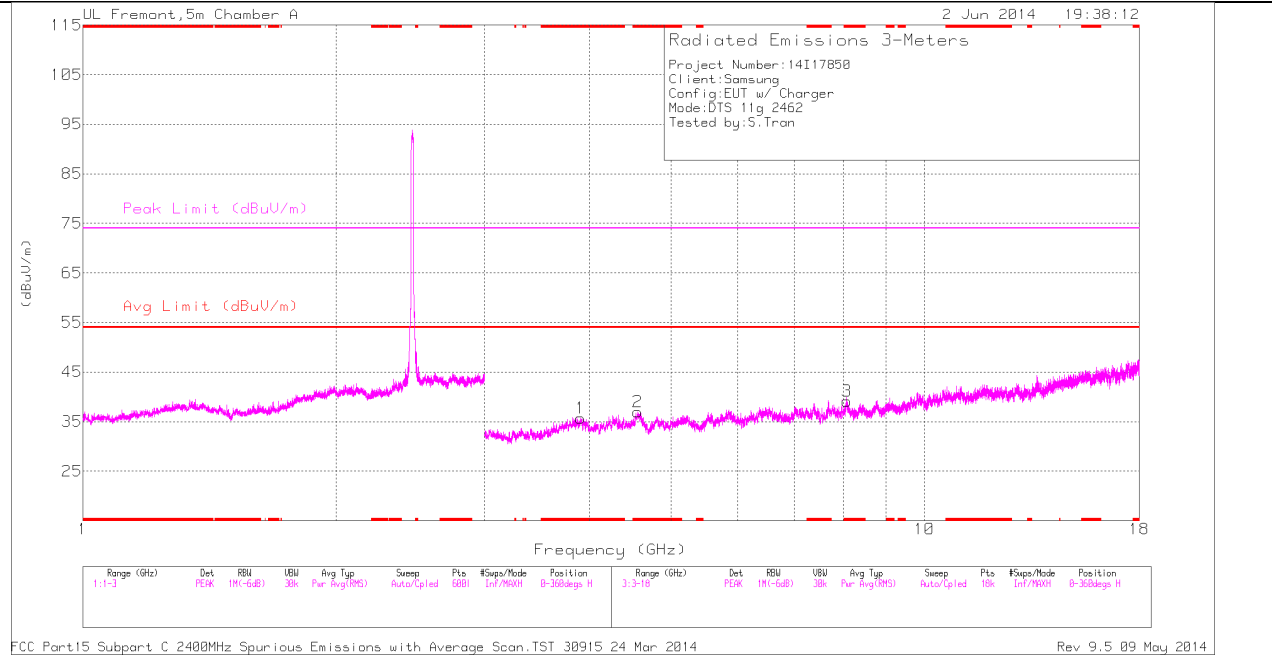

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL  
 VERTICAL**

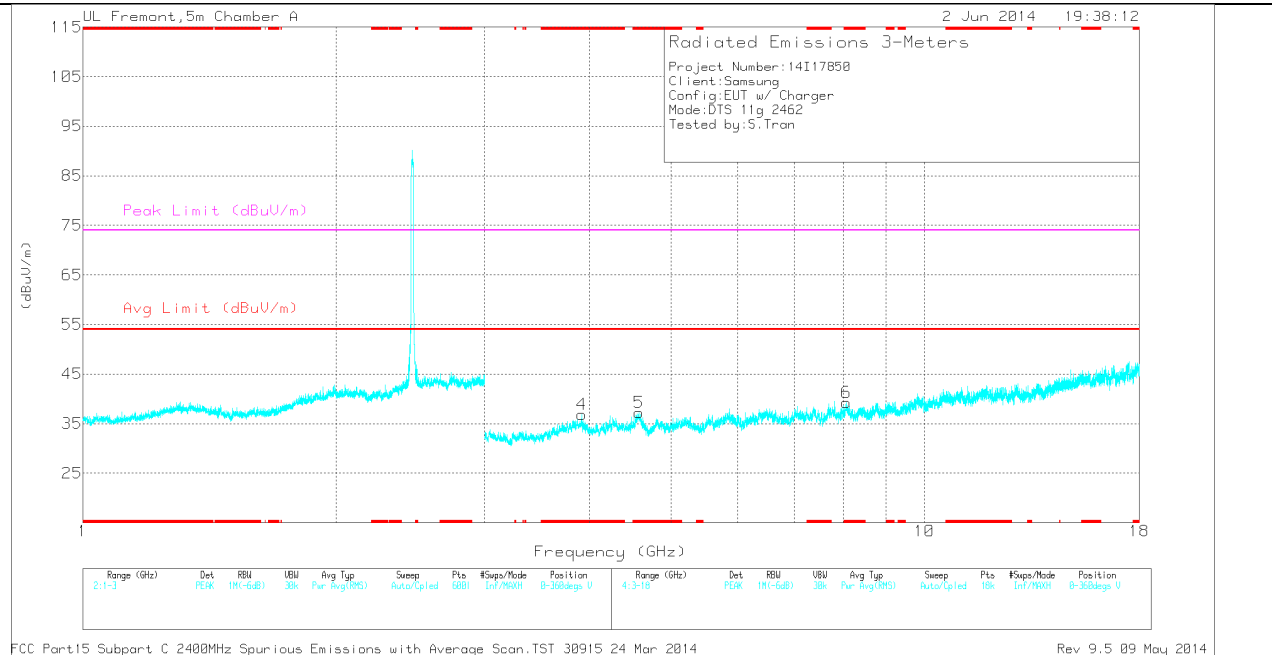

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.901	32.51	PK	33.8	-30.6	0	35.71	-	-	74	-38.29	0-360	200	H
2	* 4.563	31.39	PK	33.9	-28.3	0	36.99	-	-	74	-37.01	0-360	100	H
3	* 8.093	27.6	PK	35.5	-24	0	39.1	-	-	74	-34.9	0-360	200	H
4	* 3.914	33.4	PK	33.8	-30.4	0	36.8	-	-	74	-37.2	0-360	200	V
5	* 4.577	31.81	PK	34	-28.6	0	37.21	-	-	74	-36.79	0-360	200	V
6	* 8.078	27.3	PK	35.5	-23.5	0	39.3	-	-	74	-34.7	0-360	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.899	39.7	PK2	33.8	-30.6	0	42.9	-	-	74	-31.1	359	201	H
* 8.094	35.05	PK2	35.5	-24	0	46.55	-	-	74	-27.45	359	201	H
* 8.079	35.53	PK2	35.5	-23.5	0	47.53	-	-	74	-26.47	203	201	V
* 8.08	23.84	MAV1	35.5	-23.5	.4	36.24	54	-17.76	-	-	203	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak

### 10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL

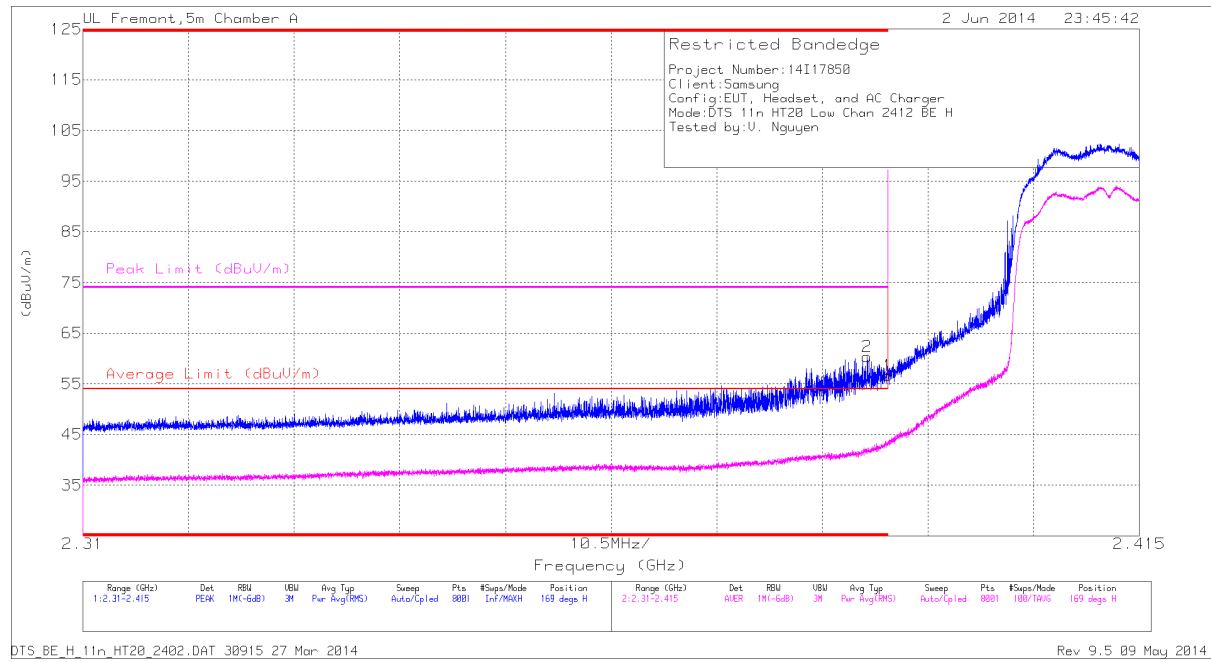


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.78	PK	32.2	-24.4	0	56.58	-	-	74	-17.42	169	183	H
2	* 2.388	52.3	PK	32.2	-24.2	0	60.3	-	-	74	-13.7	169	183	H
3	* 2.39	35.02	RMS	32.2	-24.4	.4	43.22	54	-10.78	-	-	169	183	H
4	* 2.39	35.46	RMS	32.2	-24.4	.4	43.66	54	-10.34	-	-	169	183	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

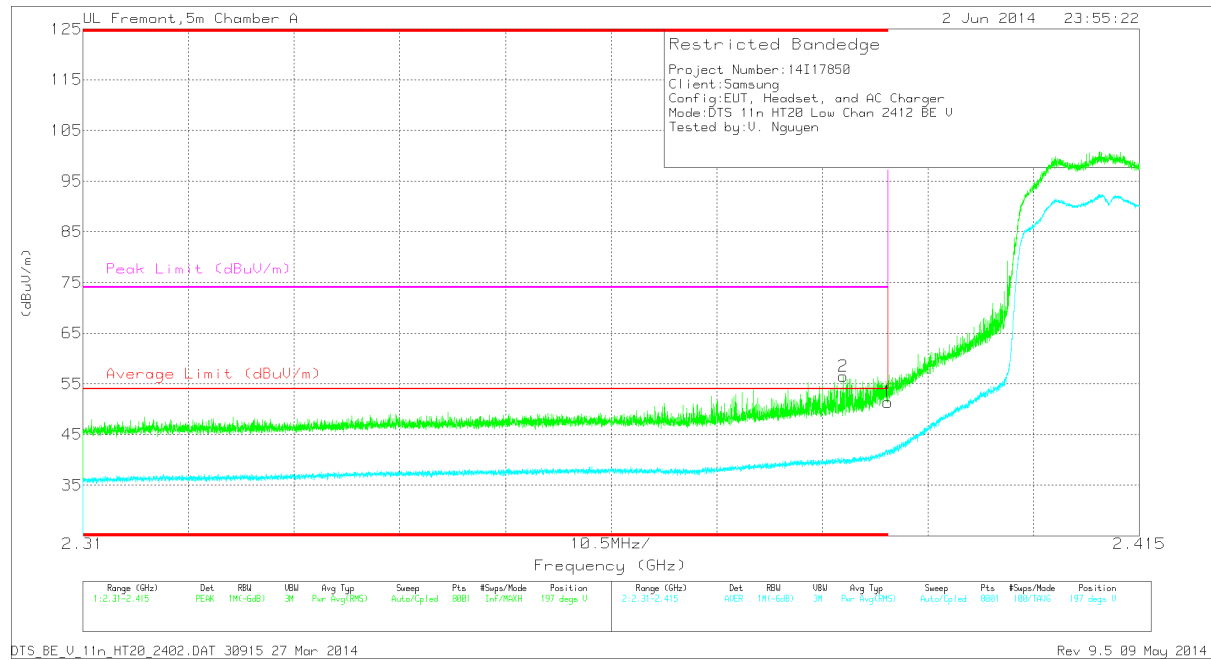

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/F ltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.55	PK	32.2	-24.4	0	51.35	-	-	74	-22.65	197	294	V
2	* 2.386	48.29	PK	32.2	-24	0	56.49	-	-	74	-17.51	197	294	V
3	* 2.39	33.34	RMS	32.2	-24.4	.4	41.54	54	-12.46	-	-	197	294	V
4	* 2.39	33.8	RMS	32.2	-24.4	.4	42	54	-12	-	-	197	294	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

**AUTHORIZED BANDEGE (HIGH CHANNEL)**

**HORIZONTAL**

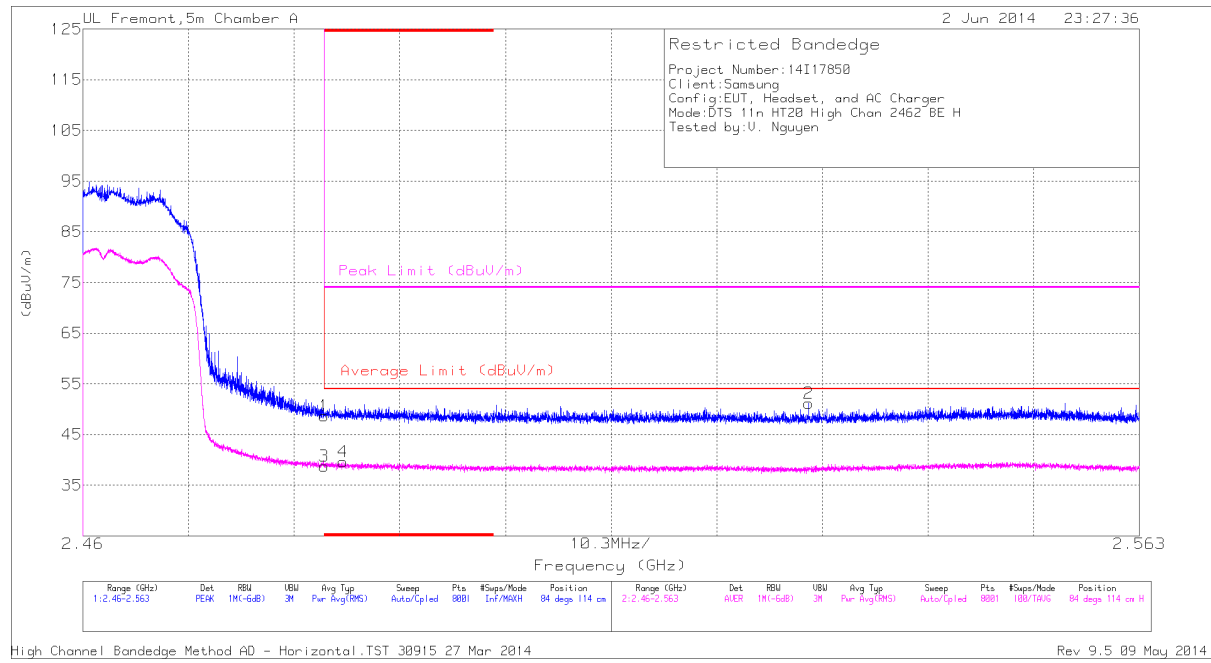


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.52	PK	32.7	-23.5	0	48.72	-	-	74	-25.28	84	114	H
3	* 2.484	29.2	RMS	32.7	-23.5	.4	38.8	54	-15.2	-	-	84	114	H
4	* 2.485	30.02	RMS	32.7	-23.5	.4	39.62	54	-14.38	-	-	84	114	H
2	2.531	42.21	PK	32.9	-23.9	0	51.21	-	-	74	-22.79	84	114	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

VERTICAL

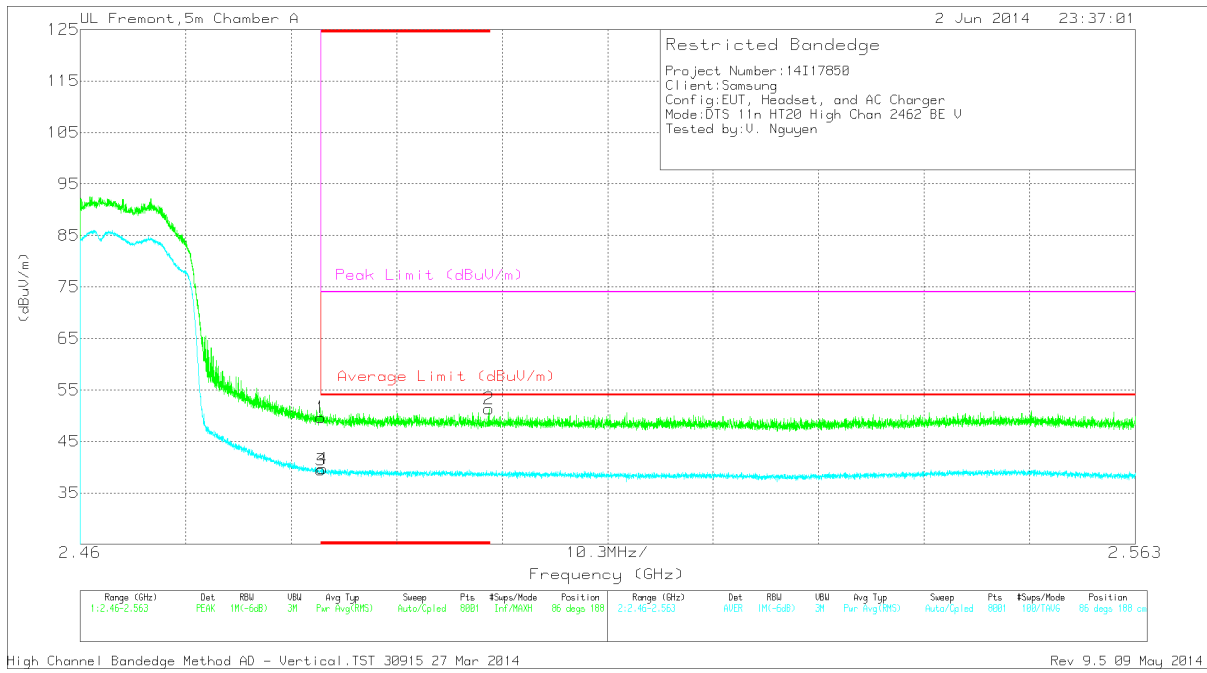


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/F ltr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.41	PK	32.7	-23.5	0	49.61	-	-	74	-24.39	86	188	V
2	* 2.5	42.13	PK	32.8	-23.6	0	51.33	-	-	74	-22.67	86	188	V
3	* 2.484	29.82	RMS	32.7	-23.5	.4	39.42	54	-14.58	-	-	86	188	V
4	* 2.484	30.11	RMS	32.7	-23.5	.4	39.71	54	-14.29	-	-	86	188	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


RMS - RMS detection

### HARMONICS AND SPURIOUS EMISSIONS

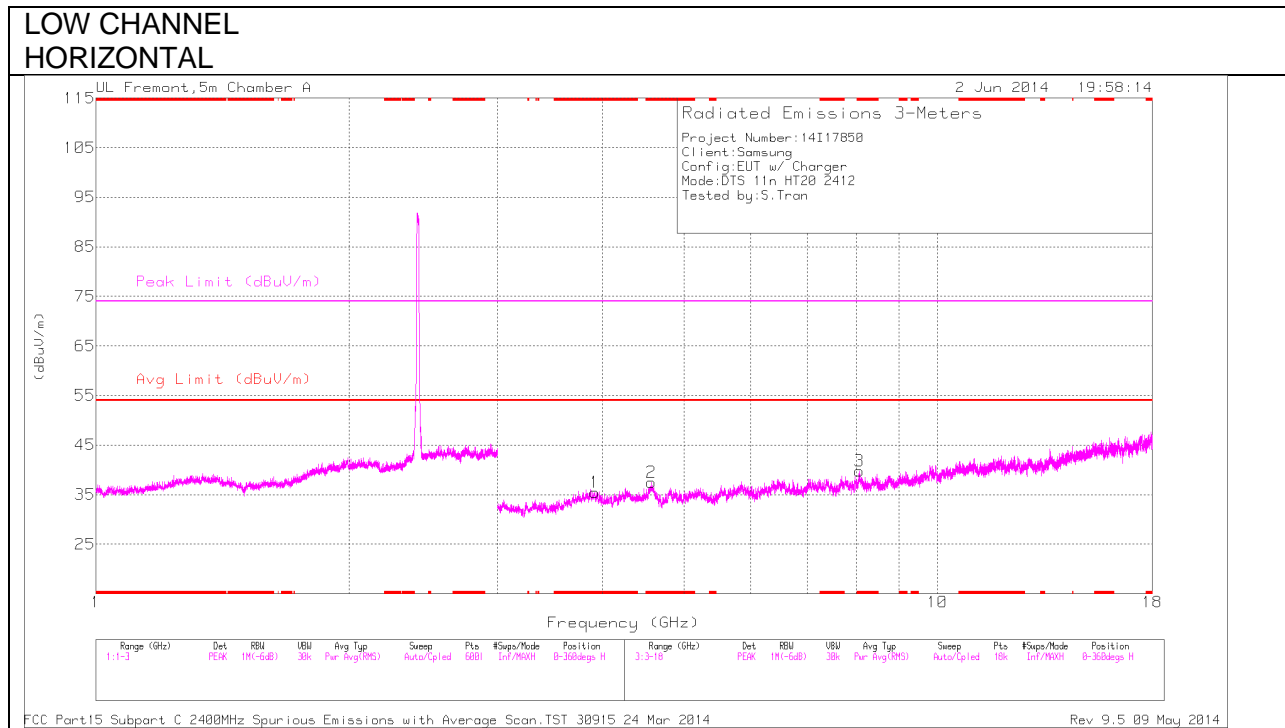

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**LOW CHANNEL  
 VERTICAL**

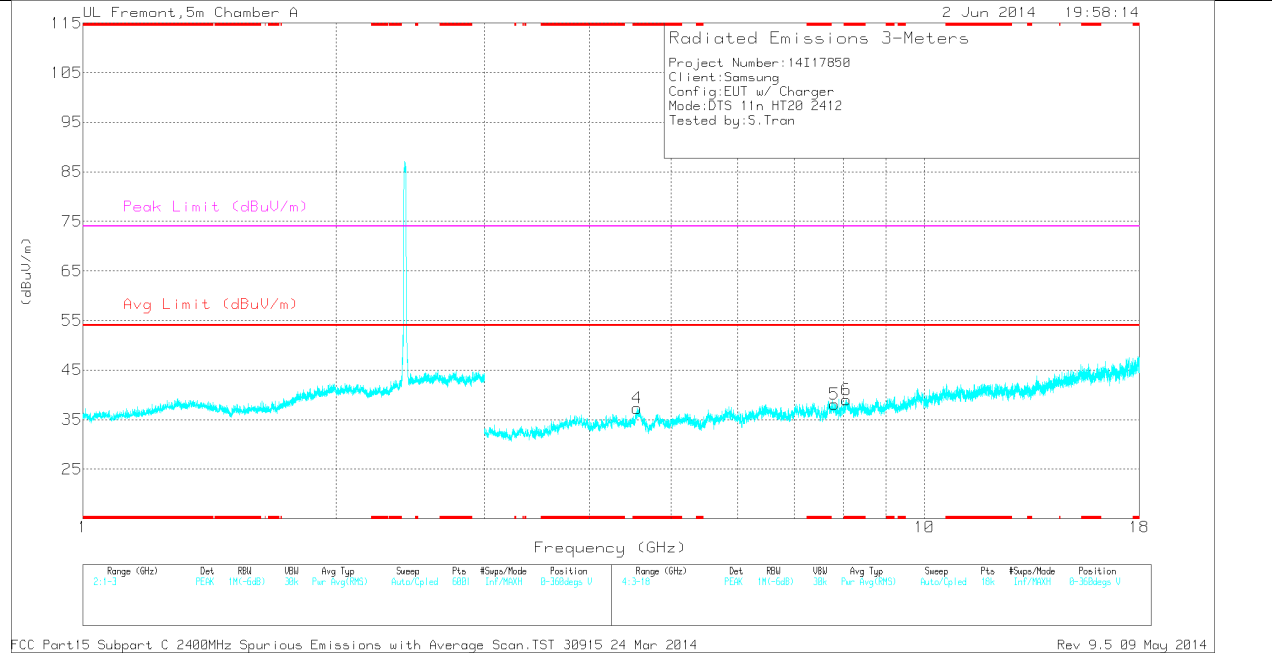

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.917	32.15	PK	33.8	-30.5	0	35.45	-	-	74	-38.55	0-360	100	H
2	* 4.572	32.05	PK	33.9	-28.5	0	37.45	-	-	74	-36.55	0-360	201	H
3	* 8.07	28.14	PK	35.5	-23.9	0	39.74	-	-	74	-34.26	0-360	201	H
4	* 4.558	31.59	PK	33.9	-28.2	0	37.29	-	-	74	-36.71	0-360	200	V
6	* 8.075	26.98	PK	35.5	-23.5	0	38.98	-	-	74	-35.02	0-360	100	V
5	7.818	28.46	PK	35.5	-25.9	0	38.06	-	-	-	-	0-360	100	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.916	40.04	PK2	33.8	-30.5	0	43.34	-	-	74	-30.66	360	100	H
* 4.572	39.68	PK2	33.9	-28.5	0	45.08	-	-	74	-28.92	360	202	H
* 4.572	28.07	PK2	33.9	-28.5	0	33.47	-	-	74	-40.53	360	202	H
* 4.574	39.33	PK2	33.9	-28.6	0	44.63	-	-	74	-29.37	360	202	H
* 4.574	28.48	MAV1	33.9	-28.6	.4	34.18	54	-19.82	-	-	360	202	H
* 8.074	36.1	PK2	35.5	-23.6	0	48	-	-	74	-26	360	100	V
* 8.075	24.4	MAV1	35.5	-23.5	.4	36.8	54	-17.2	-	-	360	100	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL  
 HORIZONTAL

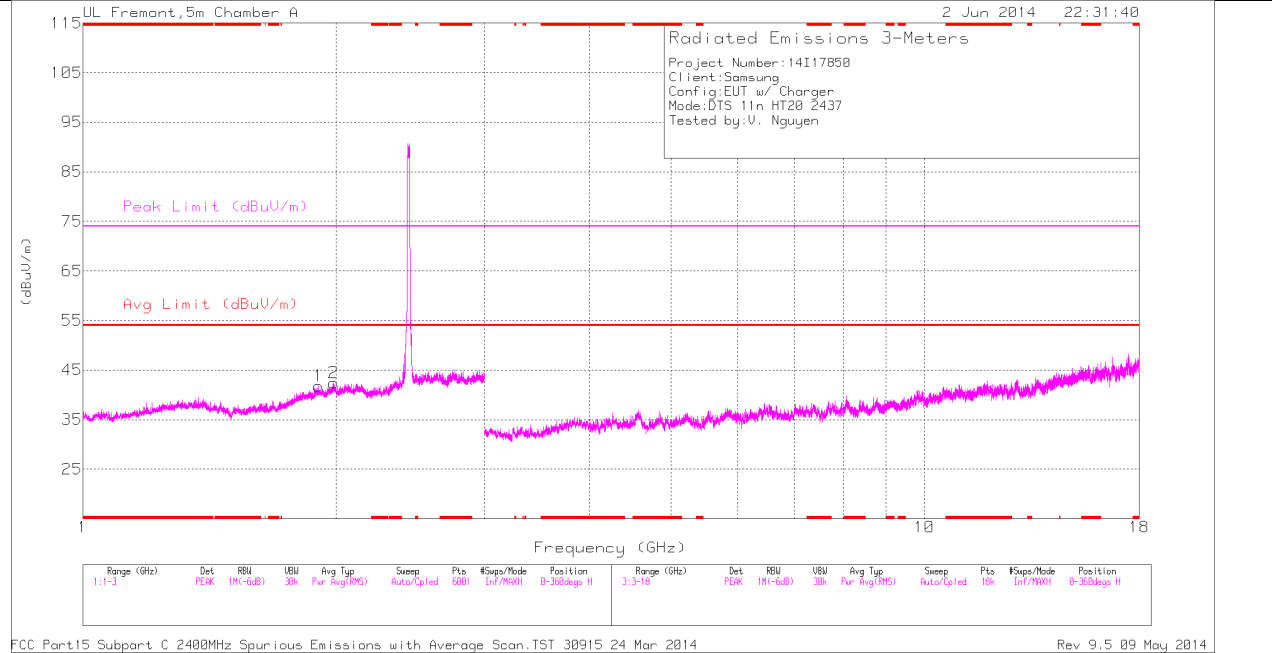

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL  
 VERTICAL

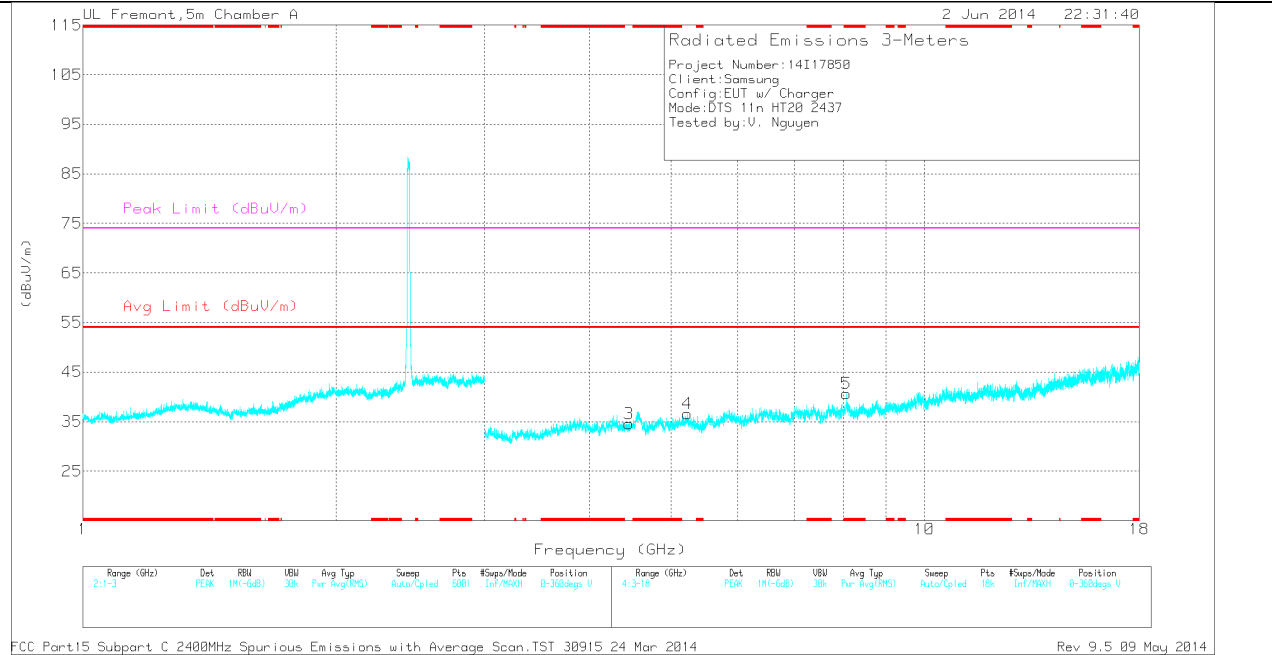

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 8.076	28.52	PK	35.5	-23.4	0	40.62	-	-	74	-33.38	0-360	100	V
1	1.906	35.27	PK	31.7	-25.2	0	41.77	-	-	-	-	0-360	200	H
2	1.987	34.77	PK	32	-24.4	0	42.37	-	-	-	-	0-360	200	H
3	4.453	31.65	PK	33.9	-31	0	34.55	-	-	-	-	0-360	100	V
4	5.23	30.12	PK	34.2	-27.7	0	36.62	-	-	-	-	0-360	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 8.069	35.37	PK2	35.5	-24	0	46.87	-	-	74	-27.13	217	214	V
* 8.067	23.97	MAV1	35.5	-24.2	.4	35.67	54	-18.33	-	-	217	214	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

**HIGH CHANNEL  
 HORIZONTAL**

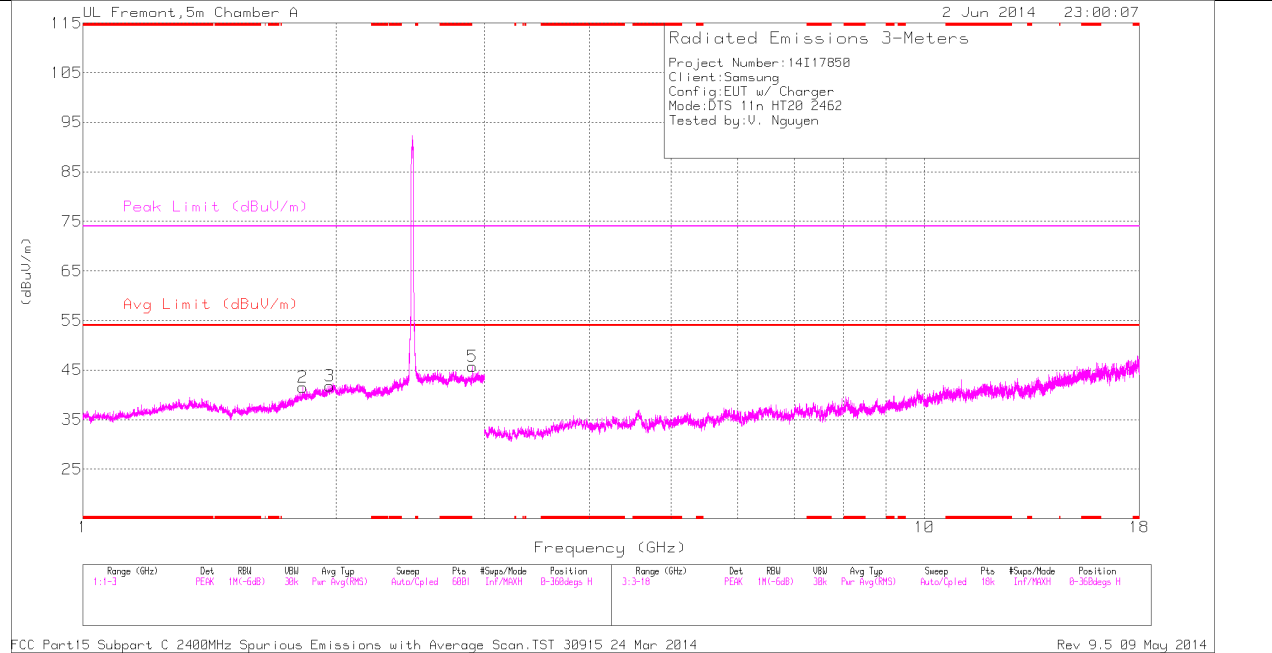

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL  
 VERTICAL**

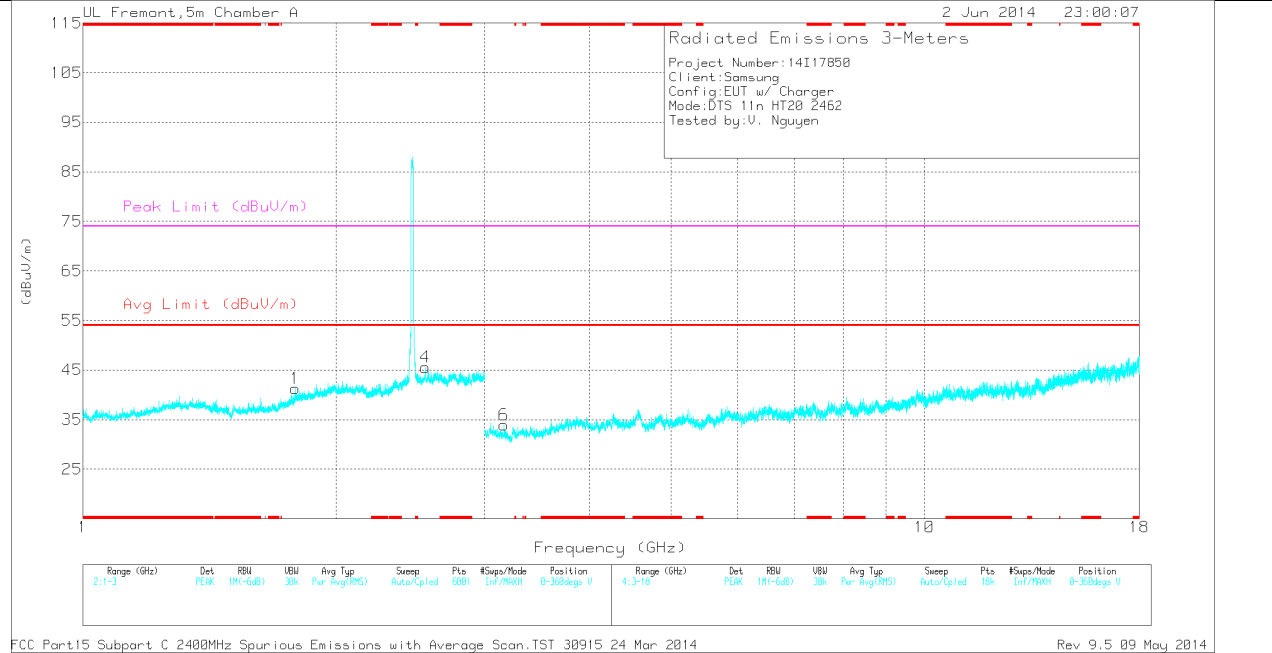

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.786	35.96	PK	30.4	-25.1	0	41.26	-	-	-	-	0-360	200	V
2	1.824	35.71	PK	30.8	-25	0	41.51	-	-	-	-	0-360	200	H
3	1.965	34.93	PK	31.9	-25	0	41.83	-	-	-	-	0-360	100	H
4	2.553	35.84	PK	32.9	-23.2	0	45.54	-	-	-	-	0-360	200	V
5	2.905	35.7	PK	32.6	-22.6	0	45.7	-	-	-	-	0-360	200	H
6	3.166	32.31	PK	32.7	-31.1	0	33.91	-	-	-	-	0-360	100	V

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/FI tr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.904	42.01	PK2	32.6	-22.6	0	52.01	54	-1.99	74	-21.99	181	127	H
2.907	30.35	MAv1	32.6	-22.8	.4	40.55	54	-13.45	74	-33.45	181	127	H

PK2 - KDB558074 Method: Maximum Peak


MAv1 - KDB558074 Option 1 Maximum RMS Average

### 10.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

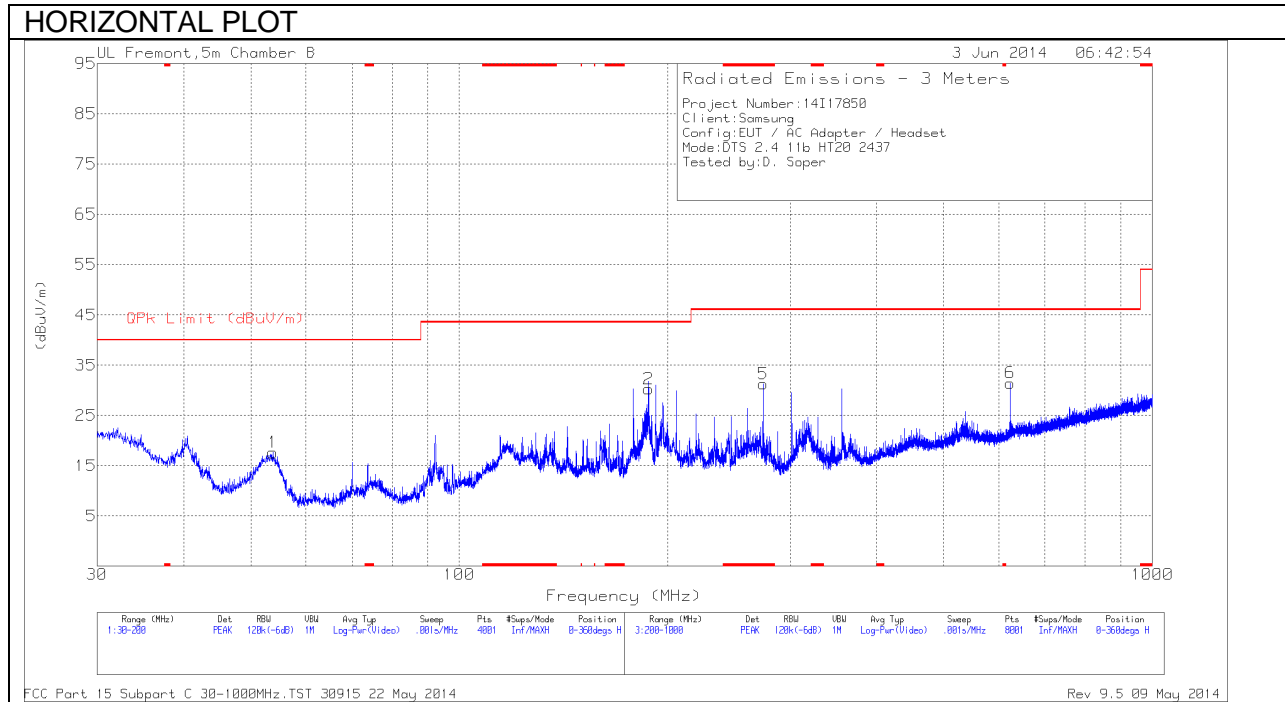

**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**

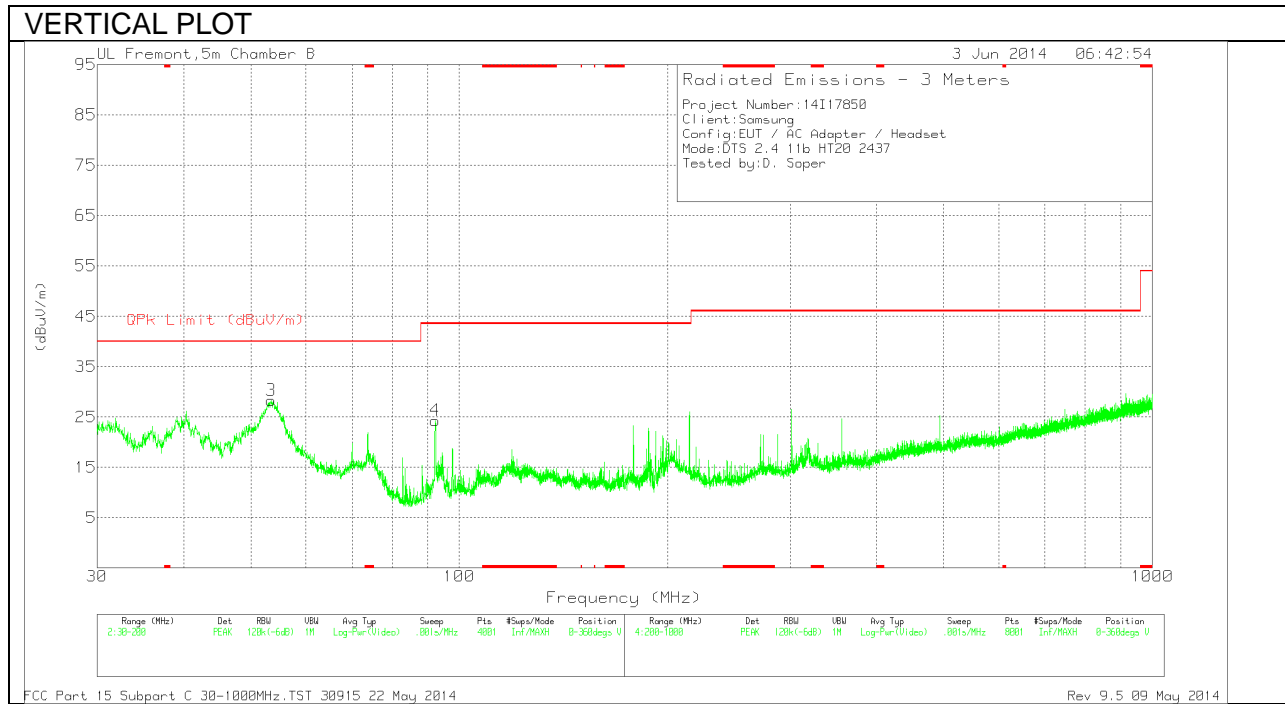

**Below 1G Data**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 274.3	43.94	PK	13.4	-26.1	31.24	46.02	-14.78	0-360	101	H
3	53.5025	49.6	PK	7.2	-28.5	28.3	40	-11.7	0-360	101	V
1	53.8	38.91	PK	7.2	-28.5	17.61	40	-22.39	0-360	400	H
4	92.3475	44.22	PK	8.2	-28.1	24.32	43.52	-19.2	0-360	101	V
2	187.505	46.28	PK	11	-27	30.28	43.52	-13.24	0-360	101	H
6	624	37.46	PK	19.2	-25.2	31.46	46.02	-14.56	0-360	300	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

## 11. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

Decreases with the logarithm of the frequency

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

**RESULTS**

**6 WORST EMISSIONS**

Line-L1 .15 - 30MHz

**Trace Markers**


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.2985	40.73	PK	.6	0	41.33	60.3	-18.97	-	-
2	.2985	28.48	Av	.6	0	29.08	-	-	50.3	-21.22
7	1.32	42.9	PK	.2	.1	43.2	56	-12.8	-	-
8	1.32	27.05	Av	.2	.1	27.35	-	-	46	-18.65
3	2.1525	45.91	PK	.2	.1	46.21	56	-9.79	-	-
4	2.1525	30.76	Av	.2	.1	31.06	-	-	46	-14.94
5	18.618	43.24	PK	.3	.2	43.74	60	-16.26	-	-
6	18.618	25.99	Av	.3	.2	26.49	-	-	50	-23.51

Line-L2 .15 - 30MHz

**Trace Markers**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.3435	40	PK	.5	0	40.5	59.1	-18.6	-	-
10	.3435	28.28	Av	.5	0	28.78	-	-	49.1	-20.32
11	2.1345	43.72	PK	.2	.1	44.02	56	-11.98	-	-
12	2.1345	29.07	Av	.2	.1	29.37	-	-	46	-16.63
13	20.5665	48.68	PK	.3	.2	49.18	60	-10.82	-	-
14	20.5665	29.17	Av	.3	.2	29.67	-	-	50	-20.33

**LINE 1 RESULTS**

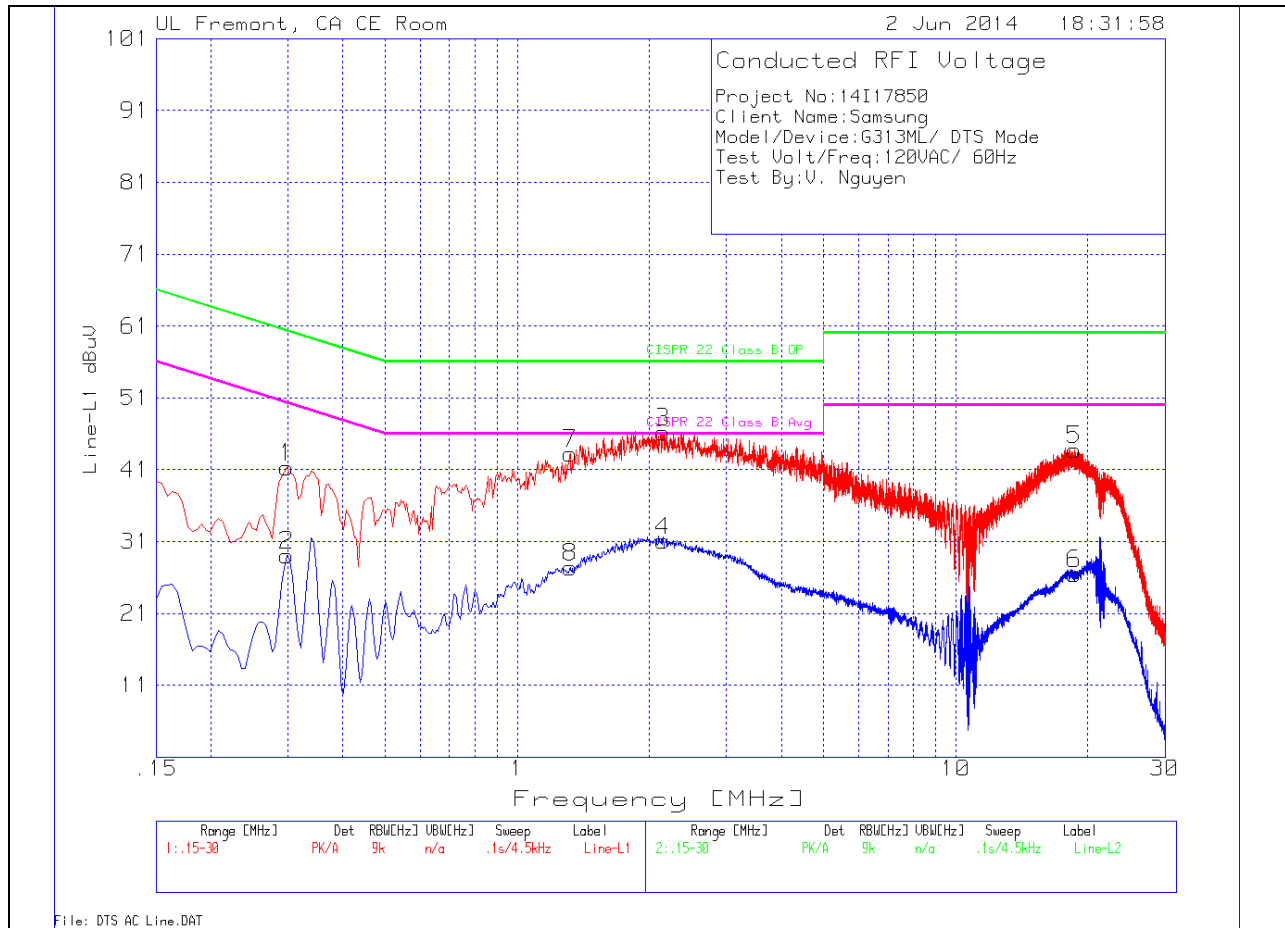

**LINE 2 RESULTS**

