



FCC 47 CFR PART 15 SUBPART B

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G316M/DS & SM-G316M

FCC ID: A3LSMG316M

REPORT NUMBER: 14I19534-E5

ISSUE DATE: DECEMBER 18, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	12/18/14	Initial issue	P. ZHANG

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>PRELIMINARY TEST CONFIGURATIONS</i>	6
5.3. <i>MODE(S) OF OPERATION INVESTIGATED</i>	6
5.4. <i>MODIFICATIONS</i>	6
5.5. <i>DETAILS OF TESTED SYSTEM</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. APPLICABLE LIMITS AND TEST RESULTS	10
7.1. <i>RADIATED EMISSIONS</i>	10
7.2. <i>AC MAINS LINE CONDUCTED EMISSIONS</i>	17
8. SETUP PHOTOS	22

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n
MODEL: SM-G316M/DS & SM-G316M
SERIAL NUMBER: 1101049d4046b14a
DATE TESTED: DECEMBER 16-18, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

CHARLES VERGONIO
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 2324B-4)
<input checked="" type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 2324B-5)
<input type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 2324B-6)
	<input type="checkbox"/> Chamber G(IC: 2324B-7)
	<input type="checkbox"/> Chamber H(IC: 2324B-8)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

AC Adapter Power Requirements	100-300 VAC / 50-60 Hz, 700mA
List of frequencies generated or used by the EUT	1.0GHz (Clock Frequency)

5.2. PRELIMINARY TEST CONFIGURATIONS

The EUT was investigated in three orthogonal orientations X, Y, Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.3. MODE(S) OF OPERATION INVESTIGATED

Mode	Description
Idle	Receive mode

5.4. MODIFICATIONS

No modifications were made during testing.

5.5. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT & PERIPHERALS

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	TP00001A	60Y5028	DoC
Earphone	Samsung	GH59	N/A	DoC
AC Adapter	Samsung	ETA0U10IBE	N/A	N/A
Mouse	Logitech	M-U0026	1304HS02AX68	N/A
Keyboard	Lenovo	KU-0225	54Y9400	N/A
Switch	Netgear	GS108T	29SA3C5T00E79	DoC


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Power	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A
3	USB	1	Mini-USB	Shielded	2m	N/A
4	AC Power	1	IEC	Unshielded	1m	N/A
5	Ethernet	1	RJ45	Unshielded	2m	N/A

TEST SETUP

The EUT is installed in a typical configuration. Test software exercised the EUT.

TEST SETUP DIAGRAM

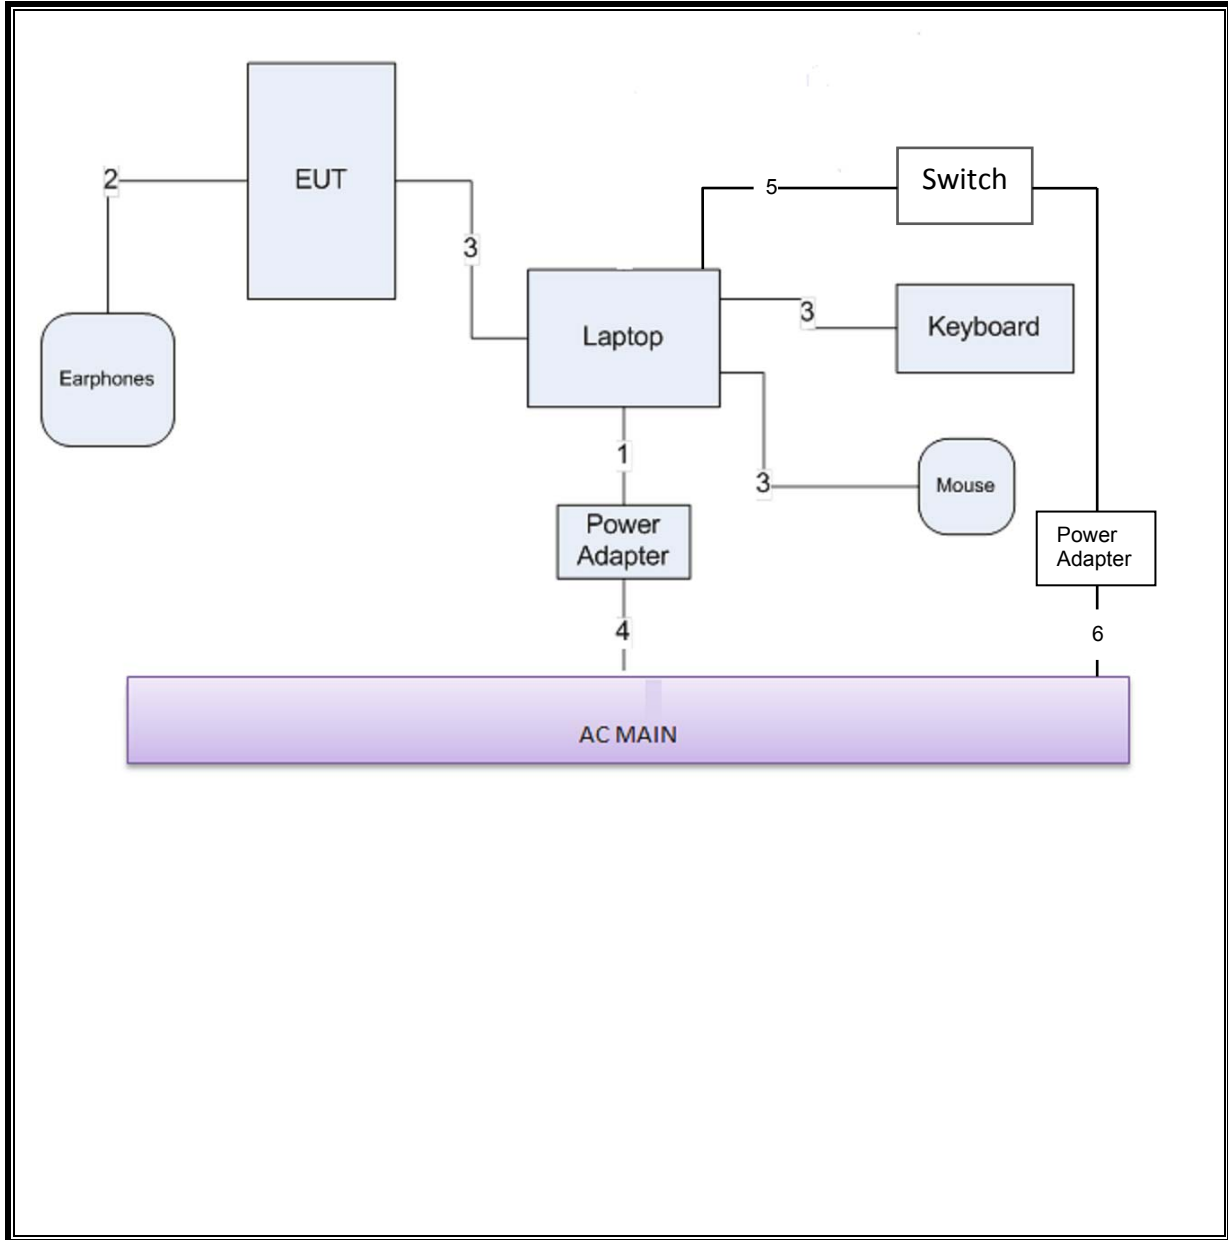

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Spectrum Analyzer, 44 GHz	Agilent/HP	E4446A	US42070220	04/01/15
Preamplifier, 1300 MHz	Agilent/HP	8447D	1937A02062	01/16/15
Antenna, Bilog, 30MHz-1GHz	Sunol Sciences	JB1	A0022704	08/14/15
Preamplifier, 26.5 GHz	Agilent/HP	8449B	3008A00931	10/22/15
Antenna, Horn, 18 GHz	ETS	3117	35234	02/21/15
EMI Test Receiver, 30 MHz	R&S	ESHS 20	827129/006	08/08/15
LISN, 30 MHz	FCC	50/250-25-2	114	01/14/15
LISN, 10 kHz-30MHz	Solar	8012-50-R-24-BNC	837990	C.N.R

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4: 2009

The highest clock frequency generated or used in the EUT is 1.0 GHz therefore the frequency range was investigated from 30 MHz to 18 GHz.

LIMIT


§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:


Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

RESULTS

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

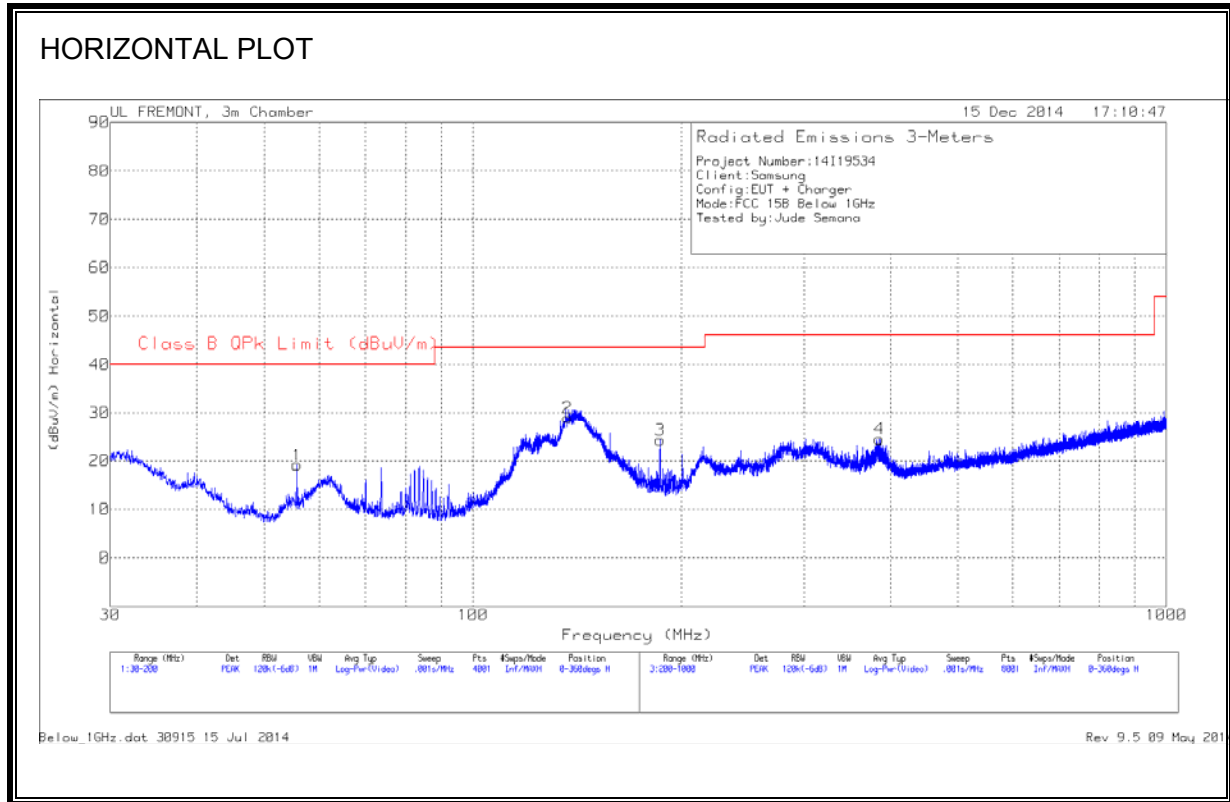

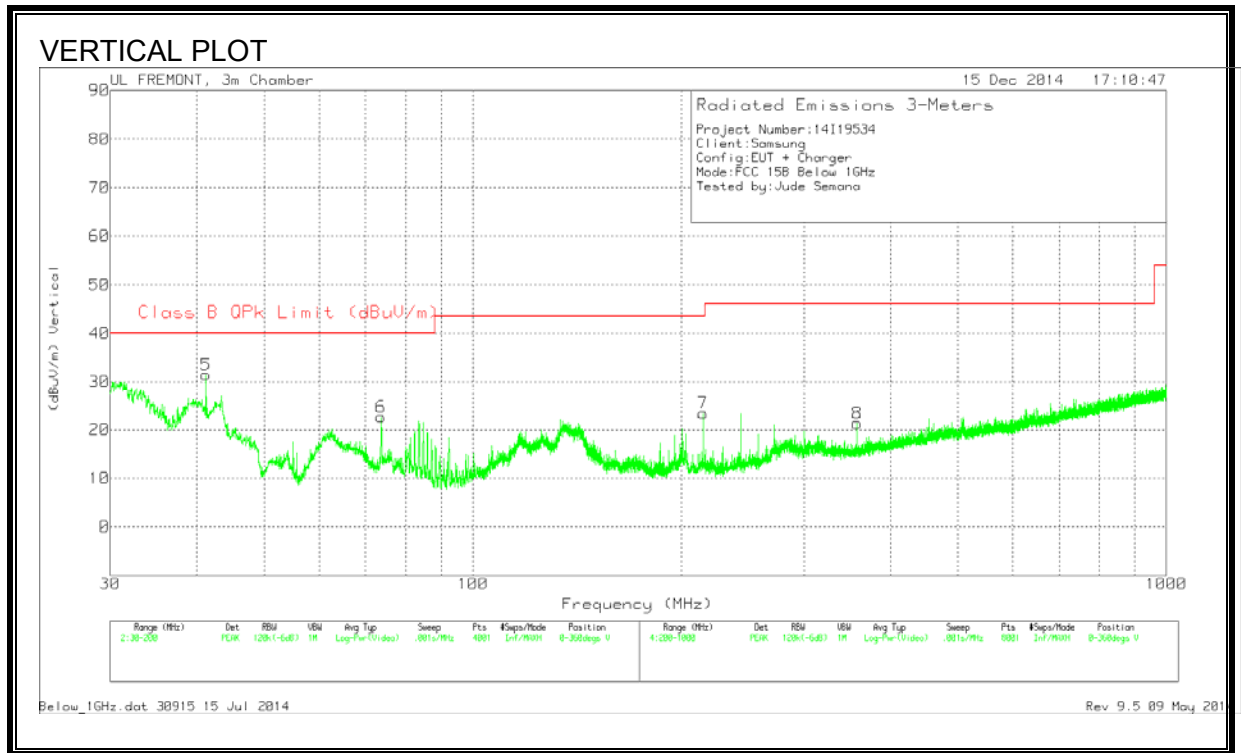



HORIZONTAL AND VERTICAL DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T477 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Class B QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	41.22	47.3	PK	12.8	-28.6	31.5	40	-8.5	0-360	101	V
1	55.755	40.44	PK	7.2	-28.5	19.14	40	-20.86	0-360	400	H
6	73.7325	42.8	PK	8.1	-28.3	22.6	40	-17.4	0-360	101	V
2	136.93	43.35	PK	13.2	-27.6	28.95	43.52	-14.57	0-360	300	H
3	186.145	40.02	PK	11.2	-27	24.22	43.52	-19.3	0-360	101	H
7	214.8	39.59	PK	10.6	-26.8	23.39	43.52	-20.13	0-360	200	V
8	358	32.42	PK	14.7	-25.8	21.32	46.02	-24.7	0-360	200	V
4	385.6	35.34	PK	15	-25.9	24.44	46.02	-21.58	0-360	101	H

PK - Peak detector

RADIATED EMISSIONS 1GHz to 18GHz (WORST-CASE CONFIGURATION)

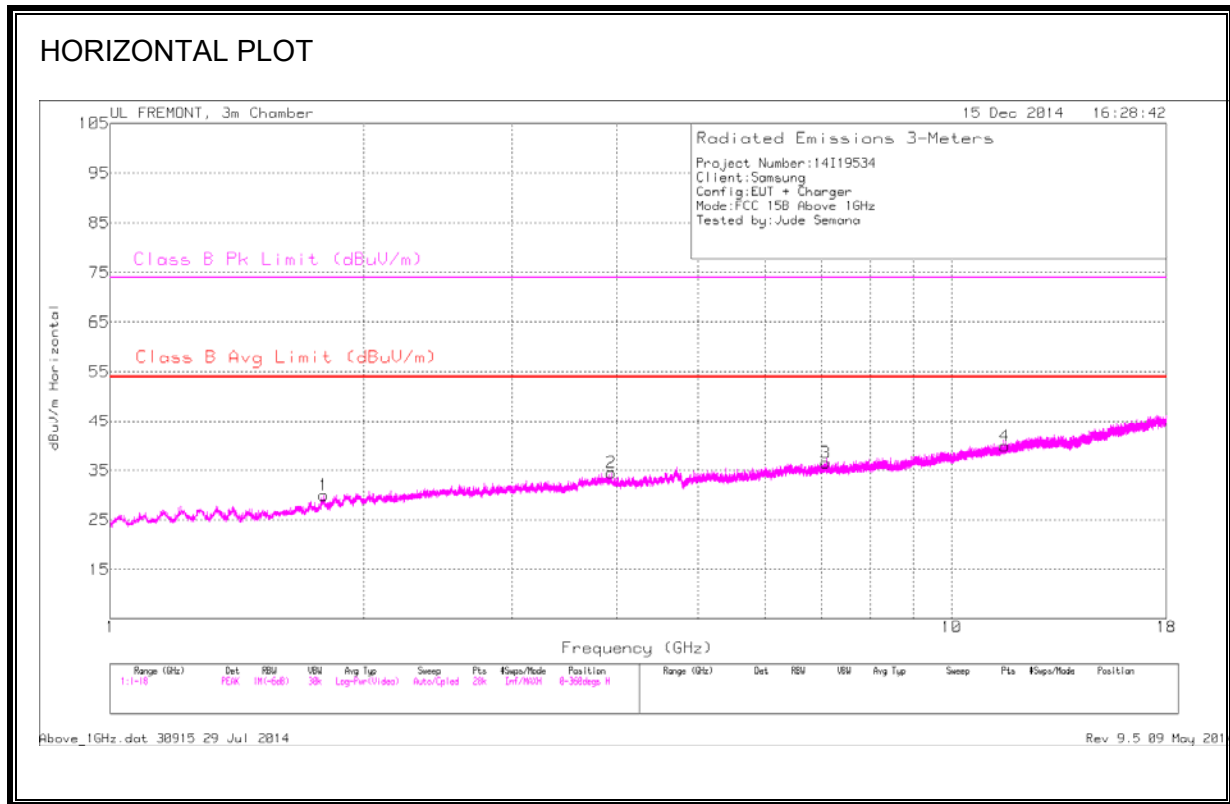

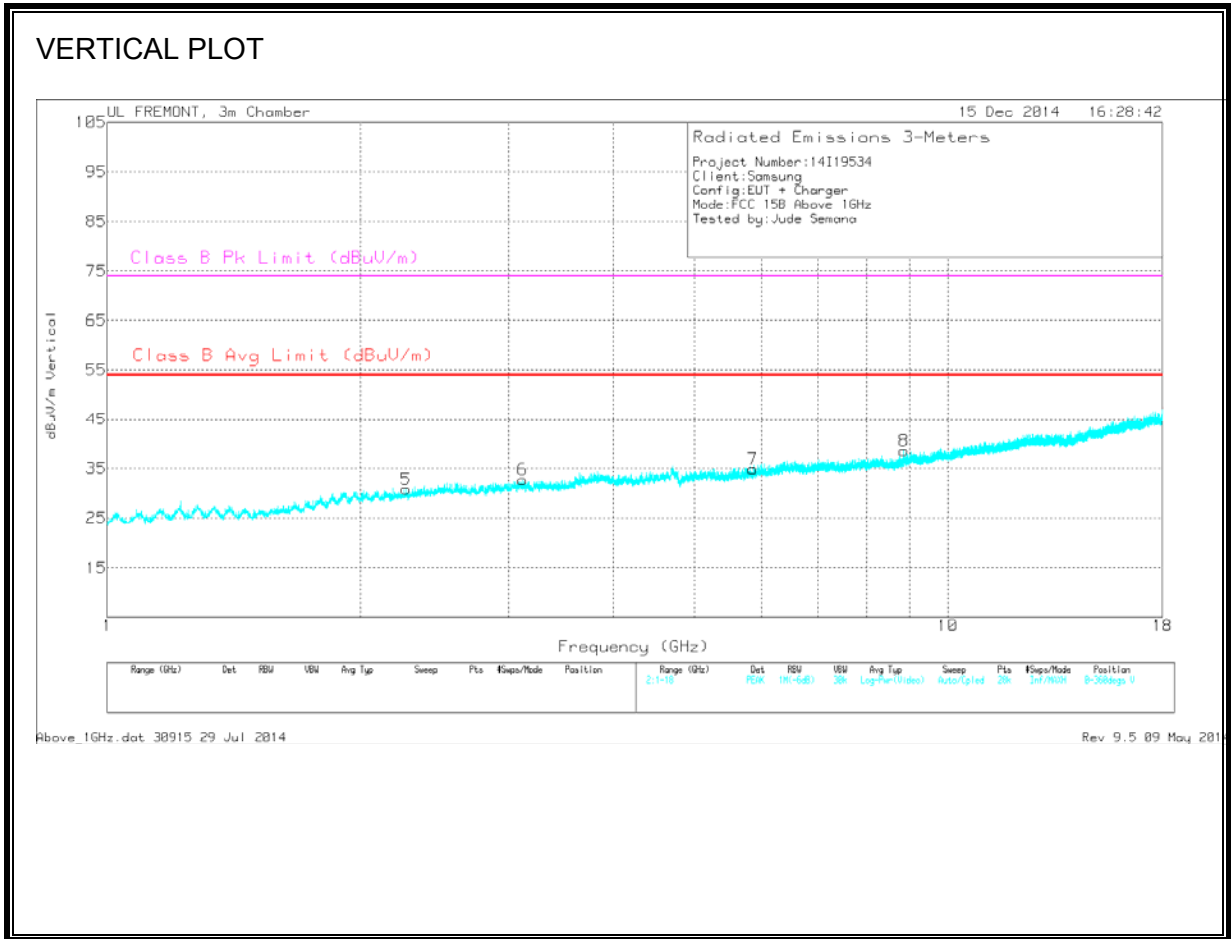

HORIZONTAL AND VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl (dB)	Corrected Reading dBuV/m	Class B Avg Limit (dBuV/m)	Av(CISPR) Margin (dB)	Class B Pk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	1.793	33.46	PK	30.1	-33.6	29.96	-	-	74	-44.04	0-360	199	H
5	2.268	32.41	PK	31.5	-33.1	30.81	-	-	74	-43.19	0-360	199	V
6	3.12	32.02	PK	32.8	-32.1	32.72	-	-	74	-41.28	0-360	199	V
2	3.941	32.3	PK	33.7	-31.5	34.5	-	-	74	-39.5	0-360	199	H
7	5.864	30.13	PK	34.9	-30.2	34.83	-	-	74	-39.17	0-360	199	V
3	7.083	29.18	PK	35.6	-28.3	36.48	-	-	74	-37.52	0-360	199	H
8	8.865	28.38	PK	36	-25.8	38.58	-	-	74	-35.42	0-360	199	V
4	11.561	25.12	PK	38.1	-23.3	39.92	-	-	74	-34.08	0-360	100	H

PK - Peak detector

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.4: 2009

LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.


Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

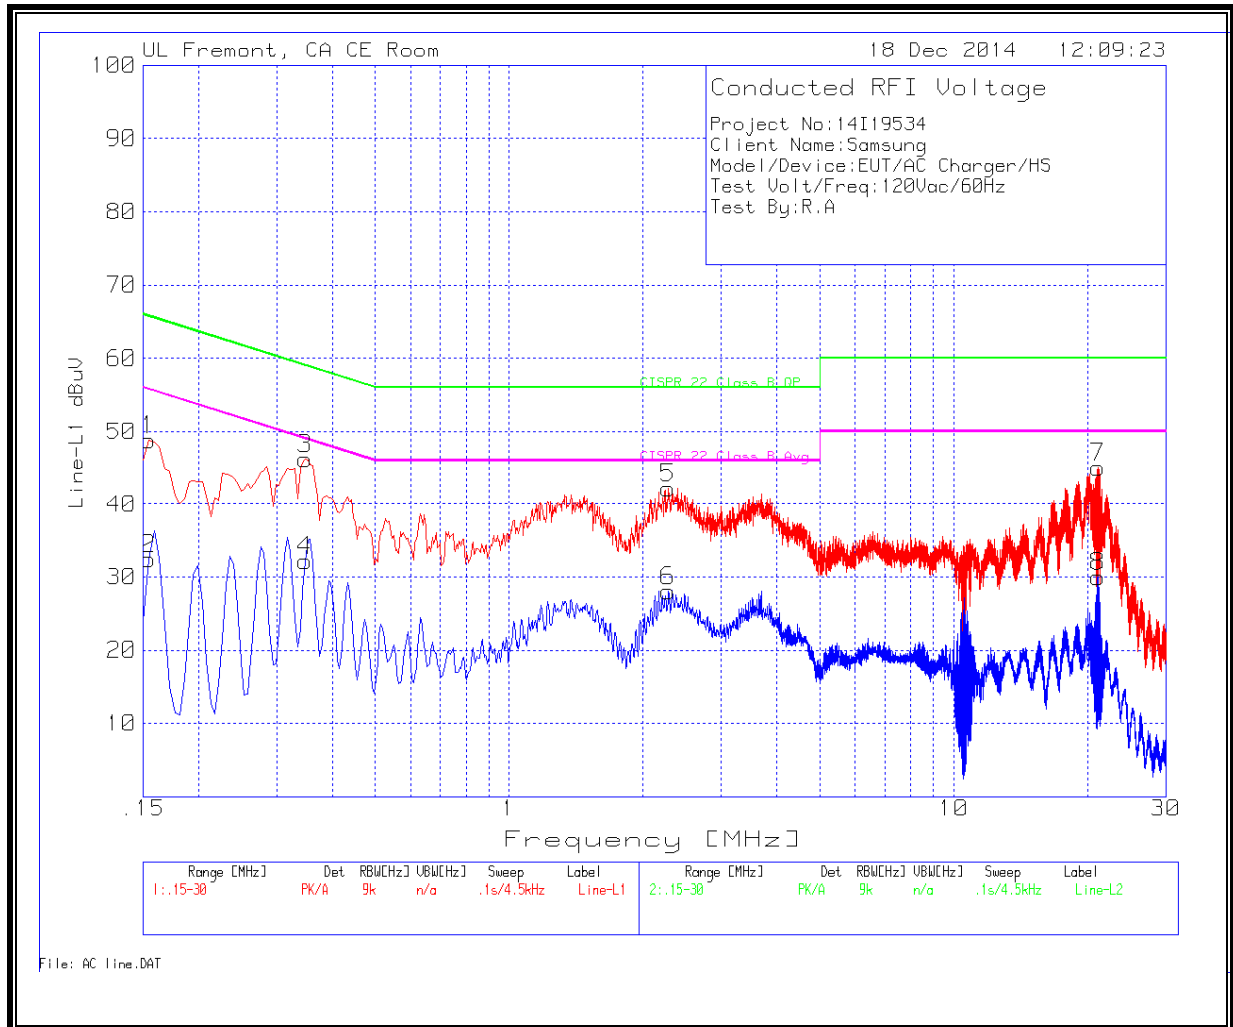


LINE 1 RESULTS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1545	47.47	PK	1.3	0	48.77	65.8	-17.03	-	-
2	.1545	31.18	Av	1.3	0	32.48	-	-	55.8	-23.32
3	.348	45.73	PK	.5	0	46.23	59	-12.77	-	-
4	.348	31.72	Av	.5	0	32.22	-	-	49	-16.78
5	2.283	41.94	PK	.2	.1	42.24	56	-13.76	-	-
6	2.283	27.73	Av	.2	.1	28.03	-	-	46	-17.97
7	21.1335	44.53	PK	.3	.2	45.03	60	-14.97	-	-
8	21.1335	29.49	Av	.3	.2	29.99	-	-	50	-20.01

Line-L2 .15 - 30MHz

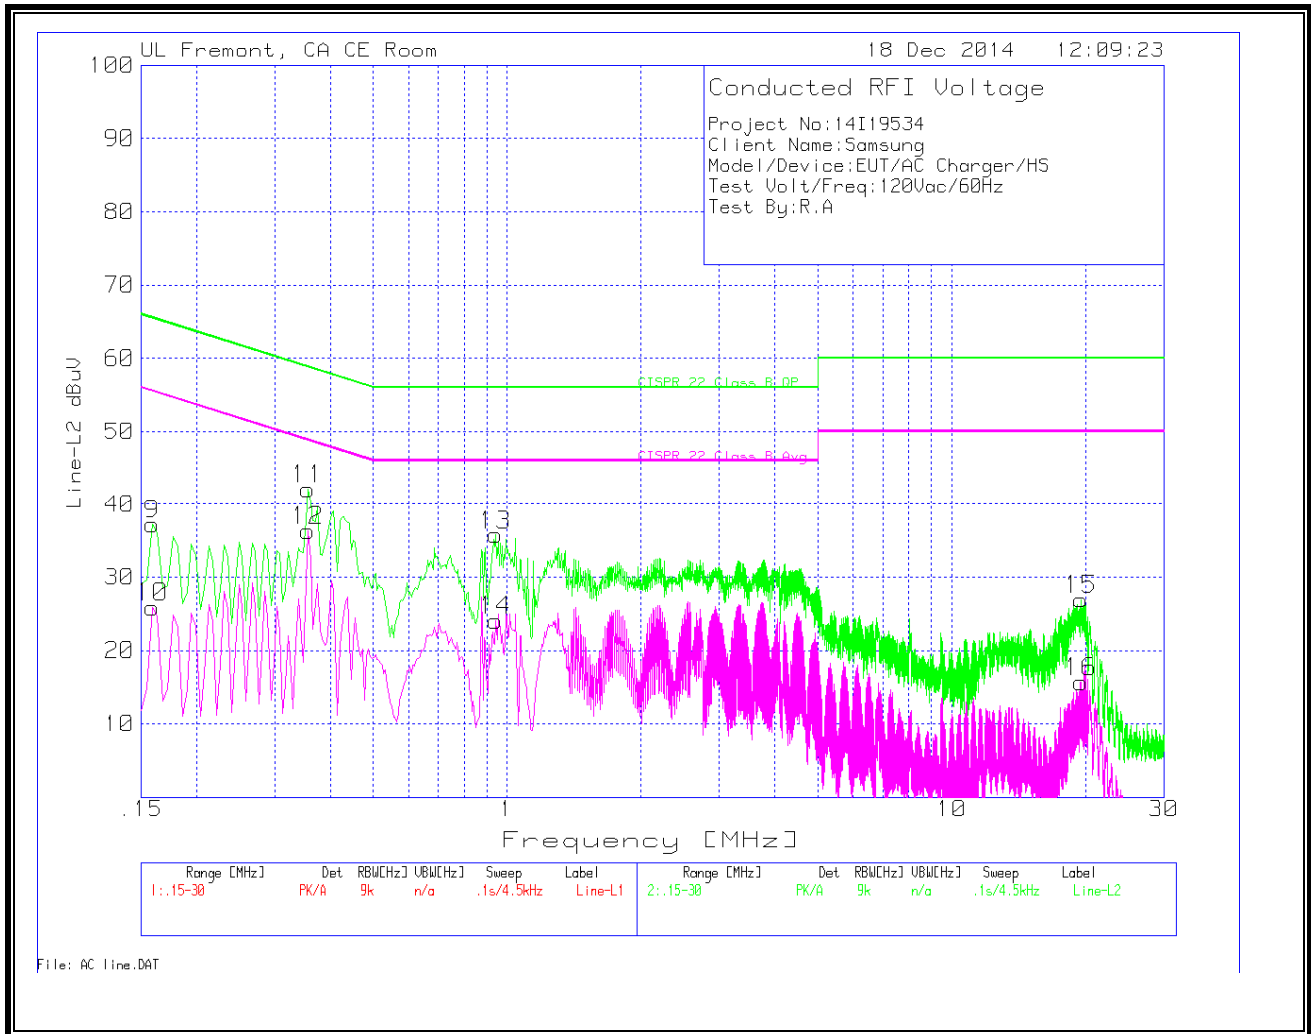

LINE 2 RESULTS

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
9	.159	35.8	PK	1.4	0	37.2	65.5	-28.3	-	-
10	.159	24.48	Av	1.4	0	25.88	-	-	55.5	-29.62
11	.357	41.56	PK	.5	0	42.06	58.8	-16.74	-	-
12	.357	35.8	Av	.5	0	36.3	-	-	48.8	-12.5
17	.636	34.41	PK	.3	0	34.71	56	-21.29	-	-
18	.636	29.91	Av	.3	0	30.21	-	-	46	-15.79
13	.942	35.43	PK	.3	0	35.73	56	-20.27	-	-
14	.942	23.75	Av	.3	0	24.05	-	-	46	-21.95
19	3.2685	36.69	PK	.2	.1	36.99	56	-19.01	-	-
20	3.2685	34.42	Av	.2	.1	34.72	-	-	46	-11.28
23	12.291	51.09	PK	.2	.2	51.49	60	-8.51	-	-
24	12.291	40.67	Av	.2	.2	41.07	-	-	50	-8.93
21	12.8175	52.07	PK	.3	.2	52.57	60	-7.43	-	-
22	12.8175	43.82	Av	.3	.2	44.32	-	-	50	-5.68
15	19.5225	26.46	PK	.3	.2	26.96	60	-33.04	-	-
16	19.5225	15.22	Av	.3	.2	15.72	-	-	50	-34.28