



## **SAR EVALUATION REPORT**

**FCC 47 CFR § 2.1093  
IEEE Std 1528-2013**

The model FCC ID: A3LSMG316HU shares the same enclosure and circuit board as model FCC ID: A3LSMG316MY. The WWAN and WLAN/Bluetooth circuitry and layout, including antenna, are almost identical between the two units. The WWAN and WLAN/Bluetooth antenna and surrounding circuitry is the same between these two units, and tune up power targets are identical for WWAN, WLAN and Bluetooth operations. For these reasons, the SAR data for the WWAN, WLAN, and Bluetooth operations for FCC ID: A3LSMG316HU is considered representative for FCC ID: A3LSMG316MY.

*For*  
**GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n**

**FCC ID: A3LSMG316MY  
Model Name: SM-G316MY**

**Report Number: 15119748-S1B  
Issue Date: 1/20/2015**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI  
GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*  
**UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

**Revision History**

Rev.	Date	Revisions	Revised By
--	1/8/2015	Initial Issue	--
A	1/16/2015	<ol style="list-style-type: none"><li>1. Added testing justification to leverage data from previous model</li><li>2. Updated Section 8.2 with the correct data</li><li>3. Updated Section 9.2 with the correct data</li><li>4. Updated Section 12.1 with the correct data</li><li>5. Updated Appendix C with the appropriate plot</li></ol>	Nathan Sousa
B	1/20/2015	<ol style="list-style-type: none"><li>1. Updated Section 12.1 with the correct data</li></ol>	Coltyce Sanders

**Table of Contents**

**1. Attestation of Test Results ..... 5**

**2. Test Specification, Methods and Procedures..... 6**

**3. Facilities and Accreditation ..... 6**

**4. SAR Measurement System & Test Equipment ..... 7**

    4.1. SAR Measurement System..... 7

    4.2. SAR Scan Procedures..... 8

    4.3. Test Equipment..... 10

**5. Measurement Uncertainty..... 10**

**6. Device Under Test (DUT) Information ..... 11**

    6.1. DUT Description ..... 11

    6.2. Wireless Technologies..... 11

    6.3. Nominal and Maximum Output Power..... 12

**7. RF Exposure Conditions (Test Configurations) ..... 13**

**8. Dielectric Property Measurements & System Check ..... 14**

    8.1. Dielectric Property Measurements ..... 14

    8.2. System Check..... 16

**9. Conducted Output Power Measurements..... 18**

    9.1. GSM ..... 18

    9.2. WCDMA..... 19

    9.3. Wi-Fi DTS (2.4 GHz) Band..... 22

    9.4. Bluetooth ..... 22

**10. Measured and Reported (Scaled) SAR Results..... 23**

    10.1. GSM850..... 24

    10.2. GSM1900..... 24

    10.3. WCDMA Band II..... 25

    10.4. Wi-Fi (DTS Band)..... 25

    10.5. Bluetooth..... 26

**11. SAR Measurement Variability..... 27**

**12. Simultaneous Transmission SAR Analysis ..... 28**

    12.1. Sum of the SAR for GSM850 & Wi-Fi & BT ..... 28



    12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT ..... 29

    12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT ..... 29

---

<b>Appendixes .....</b>	<b>30</b>
<i>A_ 15119748v0 SAR Photos &amp; Ant. Locations .....</i>	<i>30</i>
<i>B_ 15119748v0 SAR Highest Test Plots .....</i>	<i>30</i>
<i>C_ 15119748v1 SAR System Check Plots .....</i>	<i>30</i>
<i>D_ 15119748v0 SAR Tissue Ingredients.....</i>	<i>30</i>
<i>E_ 15119748v0 SAR Probe Cal. Certificates.....</i>	<i>30</i>
<i>F_ 15119748v0 SAR Dipole Cal. Certificates .....</i>	<i>30</i>

# 1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS LTD			
FCC ID		FCC ID: A3LSMG316MY			
Model Name		Model Name: SM-G316MY			
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
<b>SAR Limits (W/Kg)</b>					
Exposure Category		Peak spatial-average (1g of tissue)			
General population / Uncontrolled exposure		1.6			
<b>The Highest Reported SAR (W/kg)</b>					
<b>RF Exposure Conditions</b>		<b>Equipment Class</b>			
		<b>Licensed</b>	<b>DTS</b>	<b>U-NII</b>	<b>DSS (BT)</b>
Head		0.465	0.444	N/A	N/A
Body-worn*		1.096	0.140		
Hotspot/Wi-Fi Direct					
Simultaneous Tx	Head	0.909		N/A	N/A
	Body-worn*	1.236			
	Hotspot/ Wi-Fi Direct	1.236			
<b>Note(s):</b>					
<ul style="list-style-type: none"> <li>The Body-worn minimum separation distance is 15 mm. In order to cover both body-worn and hotspot RF exposure conditions, testing was performed at a separation distance of 10 mm.</li> <li>The GSM 850/1900, Wi-Fi (DTS/U-NII) and Bluetooth SAR measurement results from the original filling can be found in SAR test report 14119012-S1, FCC ID A3LSMG316HU. The GSM 850/1900 and WLAN/BT antennas and surrounding circuitry is the same between these two units, and tune up power targets are identical for GSM 850/1900 and WLAN/BT operations. Therefore, SAR data for GSM 850/1900 and WLAN/BT from the original filling was used for this model. Spot checks for GSM 850/1900 and 802.11b were performed to ensure that the SAR measurements for both devices are the same.</li> </ul>					
Date Tested		1/7/2015 to 1/8/2015			
Test Results		Pass			
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p><b>Note:</b> The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.</p>					
Approved & Released By:			Prepared By:		
					
Devin Chang Senior Engineer UL Verification Services Inc.			Coltyce Sanders Laboratory Engineer UL Verification Services Inc.		

## 2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 SAR meas for 802.11abg v01r02
- 248227 D01 SAR meas for 802.11 v02
- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D06 Hotspot Mode v02

## 3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	SAR Lab 5
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

## 4. SAR Measurement System & Test Equipment

### 4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

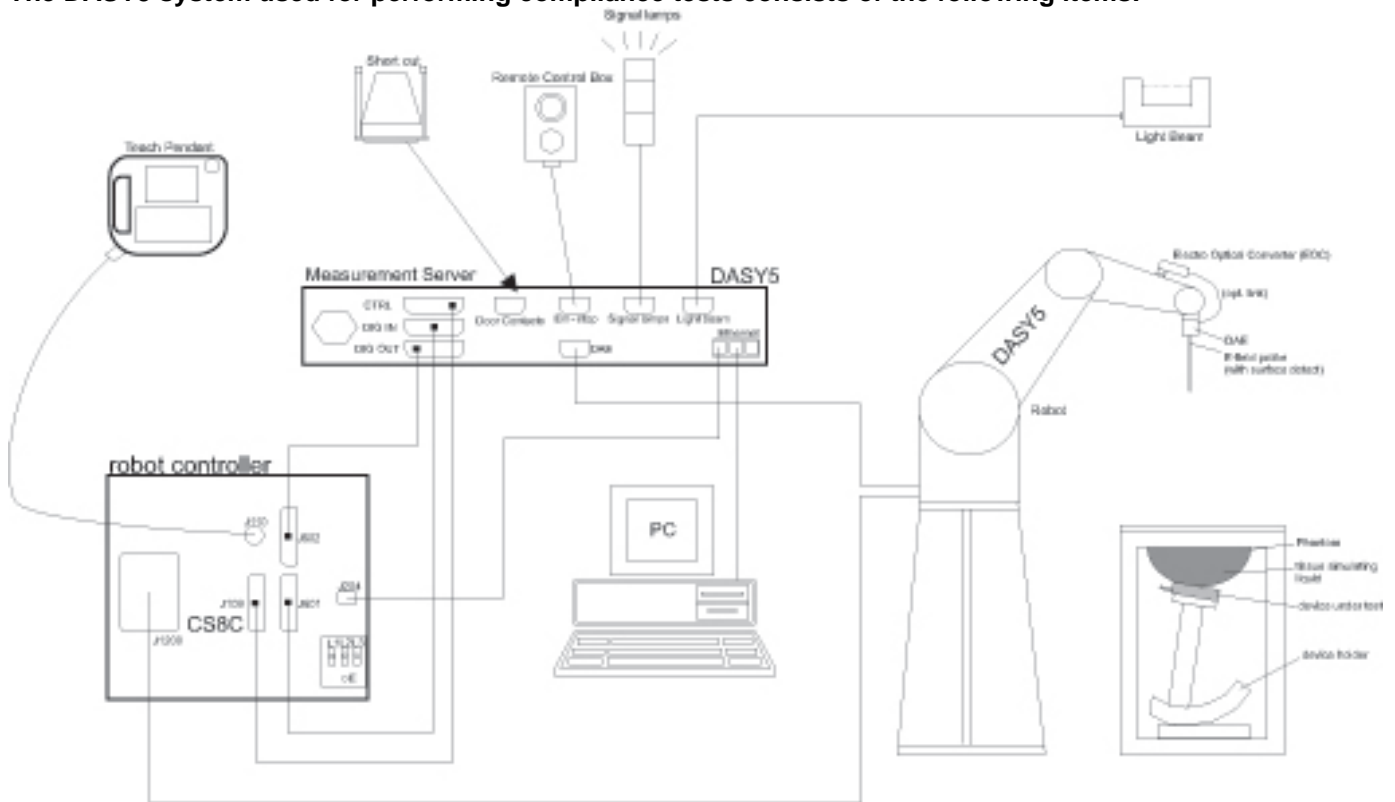

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

## 4.2. SAR Scan Procedures

### Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

### Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

**Step 3: Zoom Scan**

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		$\leq 3$ GHz	$> 3$ GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm *	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	3 – 4 GHz: $\leq 3$ mm 4 – 5 GHz: $\leq 2.5$ mm 5 – 6 GHz: $\leq 2$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm	
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

**Step 4: Power drift measurement**

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

**Step 5: Z-Scan (FCC only)**

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

### 4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

#### Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E753ES	MY40000980	4/7/2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1082	9/16/2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	Control Company	4242	122529163	10/8/2015
Thermometer	EXTECH	445703	CCS-200	3/24/2015

#### System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
HP Signal Generator	HP	8665B	3546A00784	6/23/2015
Power Meter	HP	437B	3125U16345	6/16/2015
Power Sensor	Agilent	8481A	2702A60780	6/16/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT20-3	1318A00530	N/A
Synthesized Signal Generator	Agilent	8665B	3438A00633	7/10/2015
Power Meter	Agilent	N1911A	MY53060016	8/7/2015
Power Sensor	Agilent	E9323A	MY53070003	5/1/2015
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1808938	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2710	N/A
DC Power Supply	HP	6296A	2841A-05955	N/A
E-Field Probe (SAR 1)	SPEAG	EX3DV4	3902	5/19/2015
E-Field Probe (SAR 3)	SPEAG	EX3DV4	3773	4/22/2015
E-Field Probe (SAR 4)	SPEAG	EX3DV4	3929	5/9/2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE3	427	1/21/2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1380	7/23/2015
Data Acquisition Electronics (SAR 4)	SPEAG	DAE4	1377	8/27/2015
System Validation Dipole	SPEAG	D835V2	4d117	5/16/2015
System Validation Dipole	SPEAG	D1900V2	5d043	11/12/2014
System Validation Dipole	SPEAG	D1900V2	5d163	9/11/2015
System Validation Dipole	SPEAG	D2450V2	706	5/20/2015
Thermometer (SAR Lab 1)	EXTECH	445703	CCS-205	3/24/2015
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/3/2015
Thermometer (SAR Lab 4)	EXTECH	445703	CCS-238	6/3/2015

#### Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Power Meter	Agilent	N1912A	MY53040015	7/10/2015
Power Sensor	Agilent	N1921A	MY52020011	5/6/2015
Base Station Simulator	R & S	CMW500	135393-vQ	7/3/2015
Base Station Simulator	R & S	CMW500	137873-wG	7/14/2015
Base Station Simulator	R & S	CMW500	124594-HX	10/15/2015

### 5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Standard 1528-2013 is not required in SAR reports submitted for equipment approval.

## 6. Device Under Test (DUT) Information

### 6.1. DUT Description

Model: SM-G316MY	
Device Dimension	Overall (Length x Width): 121.4 mm x 62.9 mm Overall Diagonal: 136.7 mm Display Diagonal: 115.7 mm
Battery Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover <input type="checkbox"/> Normal Battery Cover with NFC <input type="checkbox"/> Wireless Charger Battery Cover <input type="checkbox"/> Wireless Charger Battery Cover with NFC <input type="checkbox"/> The rechargeable battery is not user accessible.
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.8Vdc, 5.70Wh <input type="checkbox"/> Extended (large capacity) <input type="checkbox"/> The rechargeable battery is not user accessible.
Accessory	Headset
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)
SIM Information	<input checked="" type="checkbox"/> Single SIM <input type="checkbox"/> Dual SIM

### 6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK) GPRS (GMSK)	GSM Voice: 12.5%; (E)GPRS: 1 Slot: 12.5%; 2 Slots: 25%, 3 Slots: 37.5%, 4 Slots: 50%,
	GPRS Multi-Slot Class: <input type="checkbox"/> Class 8 - One Up <input type="checkbox"/> Class 10 - Two Up <input checked="" type="checkbox"/> Class 12 - Four Up <input type="checkbox"/> Class 33 - Four Up DTM (Dual Transfer Mode): Not support		
WCDMA (UMTS)	Band II	UMTS Rel. 99 (Voice & Data) HSDPA HSUPA HSPA+	100%
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%
Bluetooth	2.4 GHz	Version 4.0 LE	77.5% (DH5)

### 6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM 850	Voice	32.5	<b>33.0</b>
	GPRS 1 Slot	32.5	<b>33.0</b>
	GPRS 2 Slot	30.0	<b>30.5</b>
	GPRS 3 Slot	28.5	<b>29.0</b>
	GPRS 4 Slot	27.0	<b>27.5</b>
GSM 1900	Voice	29.2	<b>29.7</b>
	GPRS 1 Slot	29.2	<b>29.7</b>
	GPRS 2 Slot	27.2	<b>27.7</b>
	GPRS 3 Slot	25.2	<b>25.7</b>
	GPRS 4 Slot	24.0	<b>24.5</b>
WCDMA Band II	R99	21.8	<b>22.3</b>
	HSDPA	21.8	<b>22.3</b>
	HSUPA	21.8	<b>22.3</b>

Upper limit (dB): 0.5		RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	16.0	<b>16.5</b>
	802.11g	14.0	<b>14.5</b>
	802.11n HT20	12.0	<b>12.5</b>
Bluetooth		8.5	<b>9.0</b>
Bluetooth LE		8.0	<b>8.5</b>

## 7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	< 25 mm	Yes	
Edge 3 (Bottom)			< 25 mm	Yes		
			Edge 4 (Left)	< 25 mm	Yes	
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	Yes	
			Edge 2 (Right)	> 25 mm	No	1
Edge 3 (Bottom)			> 25 mm	No	1	
			Edge 4 (Left)	< 25 mm	Yes	

**Notes:**

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- The Body-worn minimum separation distance is 15 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.

## 8. Dielectric Property Measurements & System Check

### 8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within ± 2°C of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

#### Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

#### IEEE Standard 1528-2013

Refer to Table 3 within the IEEE Standard 1528-2013

#### Dielectric Property Measurements Results: SAR Lab 1

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
10/6/2014	Head 2450	e'	37.3100	Relative Permittivity ( $\epsilon_r$ ):	37.31	39.20	-4.82	5
		e"	12.7500	Conductivity ( $\sigma$ ):	1.74	1.80	-3.51	5
	Head 2410	e'	37.5100	Relative Permittivity ( $\epsilon_r$ ):	37.51	39.28	-4.50	5
		e"	12.5900	Conductivity ( $\sigma$ ):	1.69	1.76	-4.17	5
	Head 2475	e'	37.2400	Relative Permittivity ( $\epsilon_r$ ):	37.24	39.17	-4.92	5
		e"	12.8000	Conductivity ( $\sigma$ ):	1.76	1.83	-3.59	5
10/6/2014	Body 2450	e'	50.4200	Relative Permittivity ( $\epsilon_r$ ):	50.42	52.70	-4.33	5
		e"	14.7700	Conductivity ( $\sigma$ ):	2.01	1.95	3.18	5
	Body 2410	e'	50.5600	Relative Permittivity ( $\epsilon_r$ ):	50.56	52.76	-4.17	5
		e"	14.6200	Conductivity ( $\sigma$ ):	1.96	1.91	2.71	5
	Body 2475	e'	50.3400	Relative Permittivity ( $\epsilon_r$ ):	50.34	52.67	-4.42	5
		e"	14.8700	Conductivity ( $\sigma$ ):	2.05	1.99	3.08	5

**SAR Lab 3**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
10/6/2014	Head 835	e'	41.7500	Relative Permittivity ( $\epsilon_r$ ):	41.75	41.50	0.60	5
		e"	19.6600	Conductivity ( $\sigma$ ):	0.91	0.90	1.42	5
	Head 820	e'	41.8200	Relative Permittivity ( $\epsilon_r$ ):	41.82	41.60	0.52	5
		e"	19.7000	Conductivity ( $\sigma$ ):	0.90	0.90	-0.03	5
	Head 850	e'	41.4600	Relative Permittivity ( $\epsilon_r$ ):	41.46	41.50	-0.10	5
		e"	19.6500	Conductivity ( $\sigma$ ):	0.93	0.92	1.50	5
10/6/2014	Body 835	e'	52.8300	Relative Permittivity ( $\epsilon_r$ ):	52.83	55.20	-4.29	5
		e"	21.8600	Conductivity ( $\sigma$ ):	1.01	0.97	4.63	5
	Body 820	e'	53.0000	Relative Permittivity ( $\epsilon_r$ ):	53.00	55.28	-4.12	5
		e"	21.9300	Conductivity ( $\sigma$ ):	1.00	0.97	3.25	5
	Body 850	e'	52.7200	Relative Permittivity ( $\epsilon_r$ ):	52.72	55.16	-4.42	5
		e"	21.8400	Conductivity ( $\sigma$ ):	1.03	0.99	4.57	5
10/3/2014	Head 1900	e'	40.1300	Relative Permittivity ( $\epsilon_r$ ):	40.13	40.00	0.33	5
		e"	13.4800	Conductivity ( $\sigma$ ):	1.42	1.40	1.72	5
	Head 1850	e'	40.3200	Relative Permittivity ( $\epsilon_r$ ):	40.32	40.00	0.80	5
		e"	13.3600	Conductivity ( $\sigma$ ):	1.37	1.40	-1.84	5
	Head 1910	e'	40.0600	Relative Permittivity ( $\epsilon_r$ ):	40.06	40.00	0.15	5
		e"	13.4500	Conductivity ( $\sigma$ ):	1.43	1.40	2.03	5
10/3/2014	Body 1900	e'	53.0800	Relative Permittivity ( $\epsilon_r$ ):	53.08	53.30	-0.41	5
		e"	14.2900	Conductivity ( $\sigma$ ):	1.51	1.52	-0.68	5
	Body 1850	e'	53.2500	Relative Permittivity ( $\epsilon_r$ ):	53.25	53.30	-0.09	5
		e"	14.1200	Conductivity ( $\sigma$ ):	1.45	1.52	-4.44	5
	Body 1910	e'	53.1000	Relative Permittivity ( $\epsilon_r$ ):	53.10	53.30	-0.38	5
		e"	14.2300	Conductivity ( $\sigma$ ):	1.51	1.52	-0.58	5

**SAR Lab 4**

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
1/7/2015	Head 1900	e'	38.9500	Relative Permittivity ( $\epsilon_r$ ):	38.95	40.00	-2.62	5
		e"	13.3600	Conductivity ( $\sigma$ ):	1.41	1.40	0.82	5
	Head 1850	e'	39.1400	Relative Permittivity ( $\epsilon_r$ ):	39.14	40.00	-2.15	5
		e"	13.1700	Conductivity ( $\sigma$ ):	1.35	1.40	-3.23	5
	Head 1910	e'	38.8700	Relative Permittivity ( $\epsilon_r$ ):	38.87	40.00	-2.83	5
		e"	13.3400	Conductivity ( $\sigma$ ):	1.42	1.40	1.20	5
1/7/2015	Body 1900	e'	51.0800	Relative Permittivity ( $\epsilon_r$ ):	51.08	53.30	-4.17	5
		e"	14.5200	Conductivity ( $\sigma$ ):	1.53	1.52	0.92	5
	Body 1850	e'	51.2300	Relative Permittivity ( $\epsilon_r$ ):	51.23	53.30	-3.88	5
		e"	14.3400	Conductivity ( $\sigma$ ):	1.48	1.52	-2.95	5
	Body 1910	e'	50.9900	Relative Permittivity ( $\epsilon_r$ ):	50.99	53.30	-4.33	5
		e"	14.5500	Conductivity ( $\sigma$ ):	1.55	1.52	1.66	5

## 8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

### System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.  
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.  
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

### Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d117	5/16/2014	835	1g	9.23	9.61
				10g	5.98	6.31
D1900V2	5d043	11/12/2013	1900	1g	40.1	39.0
				10g	21.1	20.8
D1900V2	5d163	9/11/2014	1900	1g	40.8	40.6
				10g	21.2	21.4
D2450V2	706	5/20/2014	2450	1g	53.0	50.2
				10g	24.5	23.4

**System Check Results**

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

**SAR Lab 1**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
10/6/2014	D2450V2	706	Head	1g	4.95	49.5	53.0	-6.60	1,2
				10g	2.25	22.5	24.5	-8.16	
10/6/2014	D2450V2	706	Body	1g	5.37	53.7	50.2	6.97	
				10g	2.49	24.9	23.4	6.41	

**SAR Lab 3**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
10/6/2014	D835V2	4d117	Head	1g	0.99	9.9	9.23	6.93	3,4
				10g	0.65	6.5	5.98	8.03	
10/6/2014	D835V2	4d117	Body	1g	1.03	10.3	9.61	7.18	
				10g	0.68	6.8	6.31	7.92	
10/3/2014	D1900V2	5d043	Head	1g	3.96	39.6	40.10	-1.25	5,6
				10g	2.05	20.5	21.10	-2.84	
10/3/2014	D1900V2	5d043	Body	1g	3.85	38.5	39.00	-1.28	
				10g	2.00	20.0	20.80	-3.85	

**SAR Lab 4**

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
1/7/2015	1900	5d163	Head	1g	3.79	37.9	40.8	-7.11	7, 8
				10g	1.96	19.6	21.2	-7.55	
1/7/2015	1900	5d163	Body	1g	3.95	39.5	40.6	-2.71	
				10g	2.05	20.5	21.4	-4.21	

## 9. Conducted Output Power Measurements

### 9.1. GSM

#### GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	
850	GSM (Voice)	CS1	1	128	824.2	32.5	23.4	
				190	836.6	32.6	23.5	
				251	848.8	32.6	23.6	
	GPRS (GMSK)	CS1	1	1	128	824.2	32.5	23.5
					190	836.6	32.6	23.5
					251	848.8	32.6	23.6
			2	1	128	824.2	29.8	23.7
					190	836.6	29.8	23.8
					251	848.8	29.9	23.9
			3	1	128	824.2	28.2	23.9
					190	836.6	28.3	24.0
					251	848.8	28.3	24.1
			4	1	128	824.2	26.7	23.6
					190	836.6	26.7	23.7
					251	848.8	26.8	23.8

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because it's Rx only.

#### GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)	
1900	GSM (Voice)	CS1	1	512	1850.2	29.4	20.3	
				661	1880.0	29.4	20.3	
				810	1909.8	29.5	20.4	
	GPRS (GMSK)	CS1	1	1	512	1850.2	29.4	20.3
					661	1880.0	29.4	20.3
					810	1909.8	29.5	20.4
			2	1	512	1850.2	27.3	21.2
					661	1880.0	27.3	21.2
					810	1909.8	27.2	21.1
			3	1	512	1850.2	25.3	21.0
					661	1880.0	25.3	21.0
					810	1909.8	25.2	21.0
			4	1	512	1850.2	24.1	21.1
					661	1880.0	24.1	21.1
					810	1909.8	24.0	21.0

#### Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn Accessory: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above
- SAR is not required for EGPRS (8PSK) mode because it's Rx only.

## 9.2. WCDMA

### Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	$\beta_c/\beta_d$	8/15

### HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	$\beta_c$	2/15	11/15	15/15	15/15
	$\beta_d$	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	$\beta_c/\beta_d$	2/15	12/15	15/8	15/4
	$\beta_{hs}$	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	$D_{ACK}$	8			
	$D_{NAK}$	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

**HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals**

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	$\beta_c$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30/15	2/15	5/15
	$\beta_c/\beta_d$	11/15	6/15	15/9	2/15	15/1
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	$\beta_{ed}$	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	A <sub>hs</sub> = $\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

**HSPA+**

Since 16QAM is not used for uplink, the uplink Category and release is same as HSUPA, i.e., CAT 6 Rel 6. Therefore, the RF conducted power is not measured.

**Measured Results**

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg Pwr (dBm)	
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.0	
			9400	1880.0	N/A	22.0	
			9538	1907.6	N/A	21.7	
	HSDPA	Subtest 1	9262	1852.4	0	21.1	
			9400	1880.0	0	21.5	
			9538	1907.6	0	21.5	
		Subtest 2	9262	1852.4	0	21.1	
			9400	1880.0	0	21.4	
			9538	1907.6	0	21.5	
		Subtest 3	9262	1852.4	0.5	21.1	
			9400	1880.0	0.5	21.4	
			9538	1907.6	0.5	21.4	
		Subtest 4	9262	1852.4	0.5	21.1	
			9400	1880.0	0.5	21.4	
			9538	1907.6	0.5	21.4	
		HSUPA	Subtest 1	9262	1852.4	0	20.3
				9400	1880.0	0	21.1
				9538	1907.6	0	20.5
	Subtest 2		9262	1852.4	2	20.3	
			9400	1880.0	2	20.3	
			9538	1907.6	2	20.0	
	Subtest 3		9262	1852.4	1	21.3	
			9400	1880.0	1	21.3	
			9538	1907.6	1	21.1	
	Subtest 4		9262	1852.4	2	20.3	
			9400	1880.0	2	20.3	
			9538	1907.6	2	20.0	
	Subtest 5		9262	1852.4	0	21.5	
			9400	1880.0	0	21.1	
			9538	1907.6	0	21.5	

### 9.3. Wi-Fi DTS (2.4 GHz) Band

Required Test Channels per KDB 248227 D01

#### Measured Results

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	SAR Test (Yes/No)
2.4 (DTS)	802.11b	1 Mbps	1	2412	16.3	Yes
			6	2437	16.3	
			11	2462	16.1	
	802.11g	6 Mbps	1	2412	13.7	No
			6	2437	14.5	
			11	2462	14.5	
	802.11n (HT20)	MCS0	1	2412	12.5	No
			6	2437	12.5	
			11	2462	12.3	

#### Note(s):

- Per KDB 248227 D01, SAR is not required for 802.11g/HT20 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11b channels.

#### Power measurements to determine worst-case data rates

Mode	Ch #	Freq. (MHz)	Data Rate	Avg Pwr (dBm)	SAR test (Yes/No)
802.11b	6	2437	1 Mbps	16.3	Yes
			2 Mbps	16.2	No
			5.5 Mbps	16.2	No
			11 Mbps	15.9	No

#### Note(s):

- Per KDB 248227 D01,
  - Testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is < 1/4 dB higher than those measured at the lowest data rate.
  - Each channel should be tested at the lowest data rate in each a-b/g mode channel BW configuration.

### 9.4. Bluetooth

Maximum tune-up tolerance limit is 9.0 dBm. This power level qualifies for exclusion of SAR testing. Refer to Standalone SAR Test Exclusion Section.

## 10. Measured and Reported (Scaled) SAR Results

**SAR Test Reduction criteria are as follows:**

### **KDB 447498 D01 General RF Exposure Guidance:**

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
- $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz

### **KDB 648474 D04 Handset SAR:**

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is  $> 1.2$  W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

### **KDB 941225 D01 SAR test for 3G devices:**

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode

### **KDB 248227 D01 SAR Measurements Procedures for 802.11 a/b/g Transmitters v01r02 (pg.6):**

Each channel should be tested at the lowest data rate in each a-b/g mode or 4.9 GHz channel BW configuration. When the extrapolated maximum peak SAR for the maximum output channel is  $\leq 1.6$  W/kg and the 1-g averaged SAR is  $\leq 0.8$  W/kg, testing of other channels in the "default test channels" or "required test channels" configuration is optional.

### 10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	190	836.6	33.0	32.6	0.273	0.299	1
			Left Tilt	190	836.6	33.0	32.6	0.168	0.184	
			Right Touch	190	836.6	33.0	32.6	0.292	<b>0.320</b>	
			Right Tilt	190	836.6	33.0	32.6	0.199	0.218	
Head VolP	GPRS 3 Slots	0	Left Touch	190	836.6	29.0	28.3	0.296	0.348	2
			Left Tilt	190	836.6	29.0	28.3	0.181	0.213	
			Right Touch	190	836.6	29.0	28.3	0.316	<b>0.371</b>	
			Right Tilt	190	836.6	29.0	28.3	0.210	0.247	
Body-worn	Voice	10	Rear	190	836.6	33.0	32.6	0.482	<b>0.529</b>	3
			Front	190	836.6	33.0	32.6	0.361	0.396	
Body-worn(VoIP) & Hotspot	GPRS 3 Slots	10	Rear	190	836.6	29.0	28.3	0.525	<b>0.617</b>	4
			Front	190	836.6	29.0	28.3	0.401	0.471	
Hotspot			Edge 2	190	836.6	29.0	28.3	0.249	0.293	
			Edge 3	190	836.6	29.0	28.3	0.066	0.078	
			Edge 4	190	836.6	29.0	28.3	0.242	0.284	

**Note(s):**

All GSM 850 SAR data- used in this report were taken from SAR report 14119012-S1, submitted under FCC ID A3LSMG316HU. Both models share identical antennas and output power. Spot checks were performed on model SM-G316MY to ensure SAR values were the same between both models.

### 10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Voice	0	Left Touch	661	1880	29.7	29.4	0.244	0.261	5
			Left Tilt	661	1880	29.7	29.4	0.117	0.125	
			Right Touch	661	1880	29.7	29.4	0.337	<b>0.361</b>	
			Right Tilt	661	1880	29.7	29.4	0.124	0.133	
Head VolP	GPRS 2 Slots	0	Left Touch	661	1880	27.7	27.3	0.280	0.307	6
			Left Tilt	661	1880	27.7	27.3	0.143	0.157	
			Right Touch	661	1880	27.7	27.3	0.402	<b>0.441</b>	
			Right Tilt	661	1880	27.7	27.3	0.152	0.167	
Body-worn	Voice	10	Rear	661	1880	29.7	29.4	0.651	<b>0.698</b>	7
			Front	661	1880	29.7	29.4	0.498	0.534	
Body-worn(VoIP) & Hotspot	GPRS 2 Slots	10	Rear	512	1850	27.7	27.3	0.803	0.880	8
				661	1880	27.7	27.3	0.817	<b>0.896</b>	
				810	1910	27.7	27.2	0.690	0.774	
Hotspot			Front	661	1880	27.7	27.3	0.624	0.684	
			Edge 2	661	1880	27.7	27.3	0.116	0.127	
			Edge 3	661	1880	27.7	27.3	0.425	0.466	
			Edge 4	661	1880	27.7	27.3	0.120	0.132	

**Note(s):**

All GSM 1900 SAR data- used in this report were taken from SAR report 14119012-S1, submitted under FCC ID A3LSMG316HU. Both models share identical antennas and output power. Spot checks were performed on model SM-G316MY to ensure SAR values were the same between both models.

### 10.3. WCDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	22.3	22.0	0.341	0.365	
			Left Tilt	9400	1880.0	22.3	22.0	0.165	0.177	
			Right Touch	9400	1880.0	22.3	22.0	0.434	<b>0.465</b>	9
			Right Tilt	9400	1880.0	22.3	22.0	0.123	0.132	
Body-worn & Hotspot	Rel 99 RMC	10	Rear	9262	1852.4	22.3	22.0	0.898	0.962	
				9400	1880.0	22.3	22.0	0.993	1.064	
				9538	1907.6	22.3	21.7	0.955	<b>1.096</b>	10
			Front	9262	1852.4	22.3	22.0	0.779	0.835	
				9400	1880.0	22.3	22.0	0.847	0.908	
Hotspot	Rel 99 RMC	10	Edge 2	9400	1880.0	22.3	22.0	0.102	0.109	
			Edge 3	9400	1880.0	22.3	22.0	0.547	0.586	
			Edge 4	9400	1880.0	22.3	22.0	0.143	0.153	

### 10.4. Wi-Fi (DTS Band)

Frequency Band	RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
2.4 GHz	Head	802.11b 1 Mbps	0	Left Touch	6	2437	16.5	16.3	0.177	0.185	
				Left Tilt	6	2437	16.5	16.3	0.135	0.141	
				Right Touch	6	2437	16.5	16.3	0.424	<b>0.444</b>	11
				Right Tilt	6	2437	16.5	16.3	0.167	0.175	
	Body-worn, Wi-Fi Direct & Hotspot	802.11b 1 Mbps	10	Rear	6	2437	16.5	16.3	0.134	<b>0.140</b>	12
				Front	6	2437	16.5	16.3	0.086	0.090	
	Hotspot	802.11b 1 Mbps	10	Edge 1	6	2437	16.5	16.3	0.048	0.050	
				Edge 4	6	2437	16.5	16.3	0.118	0.124	

**Note(s):**

All 802.11b SAR data- used in this report were taken from SAR report 14119012-S1, submitted under FCC ID A3LSMG316HU. Both models share identical antennas and output power. Spot checks were performed on model SM-G316MY to ensure SAR values were the same between both models.

## 10.5. Bluetooth

### Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ , for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f_{(\text{GHz})}$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$  for test separation distances  $\leq 50$  mm;  
 where  $x = 7.5$  for 1-g SAR, and  $x = 18.75$  for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is  $> 50$  mm.

### Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
9.0	8	10	2.480	1.3	Rear/Front	0.167

#### Conclusion:

\*: The computed value is  $< 3$ ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

## 11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is  $\geq 1.45$  W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
850	GSM 850	Body & Hotspot	Rear	No	0.525	N/A	N/A
1900	GSM 1900	Body & Hotspot	Rear	No	0.817	N/A	N/A
	WCDMA Band II	Body & Hotspot	Rear	Yes	0.993	0.969	1.02
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.424	N/A	N/A

### Conclusion:

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20.

## 12. Simultaneous Transmission SAR Analysis

### Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	GSM(Voice)	+	Wi-Fi 2.4 GHz
	2	GSM(GPRS)	+	Wi-Fi 2.4 GHz
	3	WCDMA	+	Wi-Fi 2.4 GHz
Body-w orn	1	GSM(Voice)	+	Wi-Fi 2.4 GHz
	2	GSM(Voice)	+	BT
	3	GSM(GPRS)	+	Wi-Fi 2.4 GHz
	4	GSM(GPRS)	+	BT
	5	WCDMA	+	Wi-Fi 2.4 GHz
	6	WCDMA	+	BT
Hotspot & Wi-Fi Direct	1	GSM(GPRS)	+	Wi-Fi 2.4 GHz
	2	WCDMA	+	Wi-Fi 2.4 GHz

Notes:

- Wi-Fi 2.4GHz supports Hotspot and Wi-Fi Direct.
- GPRS and WCDMA support Hotspot.
- VoIP is supported in GPRS and WCDMA.
- Wi-Fi 2.4 GHz Radio cannot transmit simultaneously with Bluetooth Radio.

### 12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM850	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.348	0.185		0.533	No
	Left Tilt	① + ②	0.213	0.141		0.354	No
	Right Touch	① + ②	0.371	0.444		<b>0.815</b>	No
	Right Tilt	① + ②	0.247	0.175		0.422	No
Body-worn Accessory & Hotspot	Rear	① + ②	0.617	0.140		<b>0.757</b>	No
		① + ③	0.617		0.167	0.784	No
	Front	① + ②	0.471	0.090		0.561	No
		① + ③	0.471		0.167	0.638	No
Hotspot	Edge 1	① + ②		0.050		0.050	No
	Edge 2	① + ②	0.293			0.293	No
	Edge 3	① + ②	0.078			0.078	No
	Edge 4	① + ②	0.284	0.124		0.408	No

**Note(s):**

All GSM 850, Wi-Fi and Bluetooth SAR values (measured or estimated) used in this report were taken from SAR report 14I19012-S1, submitted under FCC ID A3LSMG316HU

### 12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① GSM1900	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.307	0.185		0.492	No
	Left Tilt	① + ②	0.157	0.141		0.298	No
	Right Touch	① + ②	0.441	0.444		<b>0.885</b>	No
	Right Tilt	① + ②	0.167	0.175		0.342	No
Body-w orn Accessory & Hotspot	Rear	① + ②	0.896	0.140		<b>1.036</b>	No
		① + ③	0.896		0.167	1.063	No
	Front	① + ②	0.684	0.090		0.774	No
		① + ③	0.684		0.167	0.851	No
Hotspot	Edge 1	① + ②		0.050		0.050	No
	Edge 2	① + ②	0.127			0.127	No
	Edge 3	① + ②	0.466			0.466	No
	Edge 4	① + ②	0.132	0.124		0.256	No

**Note(s):**

All GSM 850, Wi-Fi and Bluetooth SAR values (measured or estimated) used in this report were taken from SAR report 14119012-S1, submitted under FCC ID A3LSMG316HU

### 12.3. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position		Simultaneous Transmission Scenario			Σ 1-g SAR (mW/g)	SPLSR (Yes/ No)
			① WCDMA Band II	② Wi-Fi(DTS)	③ Bluetooth		
Head	Left Touch	① + ②	0.365	0.185		0.550	No
	Left Tilt	① + ②	0.177	0.141		0.318	No
	Right Touch	① + ②	0.465	0.444		<b>0.909</b>	No
	Right Tilt	① + ②	0.132	0.175		0.307	No
Body-w orn Accessory & Hotspot	Rear	① + ②	1.096	0.140		<b>1.236</b>	No
		① + ③	1.096		0.167	1.263	No
	Front	① + ②	0.955	0.090		1.045	No
		① + ③	0.955		0.167	1.122	No
Hotspot	Edge 1	① + ②		0.050		0.050	No
	Edge 2	① + ②	0.109			0.109	No
	Edge 3	① + ②	0.586			0.586	No
	Edge 4	① + ②	0.153	0.124		0.277	No

**Note(s):**

All Wi-Fi and Bluetooth SAR values (measured or estimated) used in this report were taken from SAR report 14119012-S1, submitted under FCC ID A3LSMG316HU

**Conclusion:**

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

## **Appendixes**

**Refer to separated files for the following appendixes.**

**A\_15I19748v0 SAR Photos & Ant. Locations**

**B\_15I19748v0 SAR Highest Test Plots**

**C\_15I19748v1 SAR System Check Plots**

**D\_15I19748v0 SAR Tissue Ingredients**

**E\_15I19748v0 SAR Probe Cal. Certificates**

**F\_15I19748v0 SAR Dipole Cal. Certificates**

**END OF REPORT**