


# FCC RF Test Report

APPLICANT : Samsung Electronics Co., Ltd.  
EQUIPMENT : MOBILE PHONE  
BRAND NAME : SAMSUNG  
MODEL NAME : SM-G3556D  
FCC ID : A3LSMG3556D  
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)  
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was testing completed on Apr. 24, 2014. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-C-2004 and the testing has shown the tested sample to be in compliance with the applicable technical standards. The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.

## TABLE OF CONTENTS

|                                                                                       |     |
|---------------------------------------------------------------------------------------|-----|
| REVISION HISTORY.....                                                                 | 3   |
| SUMMARY OF TEST RESULT .....                                                          | 4   |
| 1 GENERAL DESCRIPTION .....                                                           | 5   |
| 1.1 Applicant.....                                                                    | 5   |
| 1.2 Manufacturer .....                                                                | 5   |
| 1.3 Product Feature of Equipment Under Test .....                                     | 5   |
| 1.4 Product Specification subjective to this standard.....                            | 6   |
| 1.5 Modification of EUT .....                                                         | 7   |
| 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....        | 7   |
| 1.7 Testing Location .....                                                            | 8   |
| 1.8 Applicable Standards .....                                                        | 8   |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....                                    | 9   |
| 2.1 Test Mode.....                                                                    | 9   |
| 2.2 Connection Diagram of Test System .....                                           | 11  |
| 2.3 Support Unit used in test configuration .....                                     | 11  |
| 2.4 Measurement Results Explanation Example .....                                     | 11  |
| 3 TEST RESULT.....                                                                    | 12  |
| 3.1 Conducted Output Power Measurement.....                                           | 12  |
| 3.2 Peak-to-Average Ratio .....                                                       | 14  |
| 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement ..... | 20  |
| 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....                        | 24  |
| 3.5 Band Edge Measurement.....                                                        | 38  |
| 3.6 Conducted Spurious Emission Measurement.....                                      | 47  |
| 3.7 Field Strength of Spurious Radiation Measurement .....                            | 78  |
| 3.8 Frequency Stability Measurement.....                                              | 104 |
| 4 LIST OF MEASURING EQUIPMENT .....                                                   | 108 |
| 5 UNCERTAINTY OF EVALUATION .....                                                     | 109 |

## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FG441602   | Rev. 01 | Initial issue of report | Apr. 29, 2014 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule                            | Description                                   | Limit                                 | Result | Remark                                  |
|----------------|-------------------------------------|-----------------------------------------------|---------------------------------------|--------|-----------------------------------------|
| 3.1            | §2.1046                             | Conducted Output Power                        | N/A                                   | PASS   | -                                       |
| 3.2            | §24.232(d)                          | Peak-to-Average Ratio                         | <13 dB                                | PASS   | -                                       |
| 3.3            | §22.913(a)(2)                       | Effective Radiated Power                      | < 7 Watts                             | PASS   | -                                       |
| 3.3            | §24.232(c)                          | Equivalent Isotropic Radiated Power           | < 2 Watts                             | PASS   | -                                       |
| 3.4            | §2.1049<br>§22.917(b)<br>§24.238(b) | Occupied Bandwidth                            | N/A                                   | PASS   | -                                       |
| 3.5            | §2.1051<br>§22.917(a)<br>§24.238(a) | Band Edge Measurement                         | $< 43 + 10\log_{10}(P[\text{Watts}])$ | PASS   | -                                       |
| 3.6            | §2.1051<br>§22.917(a)<br>§24.238(a) | Conducted Spurious Emission                   | $< 43 + 10\log_{10}(P[\text{Watts}])$ | PASS   | -                                       |
| 3.7            | §2.1053<br>§22.917(a)<br>§24.238(a) | Field Strength of Spurious Radiation          | $< 43 + 10\log_{10}(P[\text{Watts}])$ | PASS   | Under limit<br>26.2 dB at<br>2472.6 MHz |
| 3.8            | §2.1055<br>§22.355<br>§24.235       | Frequency Stability for Temperature & Voltage | < 2.5 ppm                             | PASS   | -                                       |

# 1 General Description

## 1.1 Applicant

Samsung Electronics Co., Ltd.

No.9 WeiWu Rd., Micro Electronic Industrial Park, Jingang Highway, Xiqing District, Tianjin, China

## 1.2 Manufacturer

Samsung Electronics Co., Ltd.

516229 China Guangdong Province Huizhou City Chenjiang Town Samsung Electronics Huizhou Co. Ltd.

## 1.3 Product Feature of Equipment Under Test

| Product Feature             |                                        |
|-----------------------------|----------------------------------------|
| Equipment                   | MOBILE PHONE                           |
| Brand Name                  | SAMSUNG                                |
| Model Name                  | SM-G3556D                              |
| FCC ID                      | A3LSMG3556D                            |
| GSM Operating Band(s)       | GSM850/900/1800/1900MHz                |
| GPRS/EGPRS Multi-slot Class | GPRS Class 12/EGPRS Class 12           |
| WCDMA Operating Band(s)     | WCDMA Band I / VIII                    |
| HSDPA/HSUPA Category        | 24/6                                   |
| Wi-Fi Specification         | 2.4GHz 802.11b/g/n HT20                |
| Bluetooth Version           | Bluetooth v3.0 + EDR/Bluetooth v4.0 LE |
| HW Version                  | REV1.0                                 |
| SW Version                  | G3556D.001                             |
| EUT Stage                   | Identical Prototype                    |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification subjective to this standard

| Product Specification subjective to this standard |                                                                   |
|---------------------------------------------------|-------------------------------------------------------------------|
| Tx Frequency                                      | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz  |
| Rx Frequency                                      | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz |
| Maximum Output Power to Antenna                   | GSM850 : 32.18 dBm<br>GSM1900 : 29.73 dBm                         |
| Antenna Type                                      | Intenna Antenna                                                   |
| Type of Modulation                                | GSM: GMSK<br>GPRS: GMSK<br>EDGE: GMSK / 8PSK                      |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

| FCC Rule | System               | Type of Modulation | Maximum ERP/EIRP (W) | Frequency Tolerance (ppm) | Emission Designator |
|----------|----------------------|--------------------|----------------------|---------------------------|---------------------|
| Part 22  | GSM850 GSM           | GMSK               | 0.63                 | 0.02 ppm                  | 245KGXW             |
| Part 22  | GSM850 EDGE class 8  | 8PSK               | 0.16                 | 0.02 ppm                  | 245KG7W             |
| Part 24  | GSM1900 GSM          | GMSK               | 0.91                 | 0.01 ppm                  | 247KGXW             |
| Part 24  | GSM1900 EDGE class 8 | 8PSK               | 0.38                 | 0.02 ppm                  | 247KG7W             |

## 1.7 Testing Location

|                           |                                                                                                                                                            |           |                             |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                                                                                                      |           |                             |
| <b>Test Site Location</b> | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.<br>TEL: +86-755- 3320-2398 |           |                             |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                    |           | <b>FCC Registration No.</b> |
|                           | TH01-SZ                                                                                                                                                    | 03CH01-SZ | 831040                      |

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR Part 2, 22(H), 24(E)
- ANSI / TIA / EIA-603-C-2004
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r01

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r01 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Frequency range investigated for radiated emission: 30MHz to 10<sup>th</sup> harmonic.

| Test Modes |                                                                                        |                                                                                        |
|------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Band       | Radiated TCs                                                                           | Conducted TCs                                                                          |
| GSM 850    | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> |
| GSM 1900   | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> | <ul style="list-style-type: none"><li>■ GSM Link</li><li>■ EDGE class 8 Link</li></ul> |


**Note:**

1. The maximum power levels are chosen to test as the worst case configuration as follows:  
GSM mode for GMSK modulation, EDGE multi-slot class 8 mode for 8PSK modulation, only these modes were used for all tests.
2. Since the EUT uses one radio circuitry which can be respectively triggered by two SIM cards, the power results measured by setting SIM1 or SIM 2 card are within measurement tolerance. Then the SIM card 1 is set during testing.

**Conducted Power Measurement Results:**

| Conducted Power (*Unit: dBm) |        |       |       |         |        |        |
|------------------------------|--------|-------|-------|---------|--------|--------|
| Band                         | GSM850 |       |       | GSM1900 |        |        |
| Channel                      | 128    | 189   | 251   | 512     | 661    | 810    |
| Frequency                    | 824.2  | 836.4 | 848.8 | 1850.2  | 1880.0 | 1909.8 |
| GSM                          | 32.10  | 32.15 | 32.18 | 29.34   | 29.73  | 29.26  |
| GPRS class 8                 | 32.04  | 32.07 | 32.08 | 29.33   | 29.72  | 29.21  |
| GPRS class 10                | 28.95  | 29.01 | 29.09 | 26.33   | 26.90  | 26.22  |
| GPRS class 11                | 27.91  | 27.98 | 28.00 | 25.26   | 25.77  | 25.22  |
| GPRS class 12                | 25.96  | 26.06 | 26.11 | 24.02   | 24.48  | 23.86  |
| EGPRS class 8                | 27.06  | 27.17 | 27.20 | 25.25   | 25.56  | 25.02  |
| EGPRS class 10               | 27.03  | 27.07 | 27.16 | 25.14   | 25.41  | 24.85  |
| EGPRS class 11               | 24.70  | 24.74 | 24.84 | 23.38   | 23.74  | 23.21  |
| EGPRS class 12               | 24.68  | 24.72 | 24.74 | 23.34   | 23.62  | 23.05  |

## 2.2 Connection Diagram of Test System

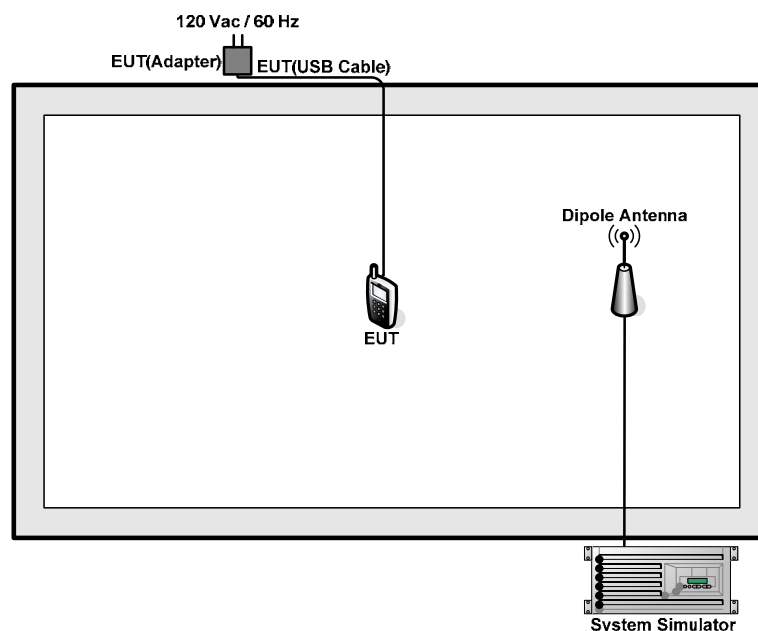

## 2.3 Support Unit used in test configuration

| Item | Equipment        | Trade Name | Model No. | FCC ID | Data Cable | Power Cord        |
|------|------------------|------------|-----------|--------|------------|-------------------|
| 1.   | System Simulator | R&S        | CMU 200   | N/A    | N/A        | Unshielded, 1.8 m |
| 2.   | System Simulator | R&S        | CMW 500   | N/A    | N/A        | Unshielded, 1.8 m |
| 3.   | DC Power Supply  | TOPWORD    | 3303DR    | N/A    | N/A        | Unshielded, 1.8 m |

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 7.5 dB and a 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 7.5 + 10 = 17.5 \text{ (dB)}
 \end{aligned}$$

### 3 Test Result

#### 3.1 Conducted Output Power Measurement

##### 3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.

##### 3.1.4 Test Setup

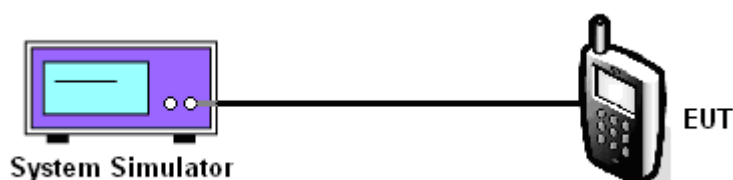

**3.1.5 Test Result of Conducted Output Power**

| Cellular Band           |              |           |            |                       |           |            |
|-------------------------|--------------|-----------|------------|-----------------------|-----------|------------|
| Modes                   | GSM850 (GSM) |           |            | GSM850 (EDGE class 8) |           |            |
| Channel                 | 128 (Low)    | 189 (Mid) | 251 (High) | 128 (Low)             | 189 (Mid) | 251 (High) |
| Frequency (MHz)         | 824.2        | 836.4     | 848.8      | 824.2                 | 836.4     | 848.8      |
| Conducted Power (dBm)   | 32.10        | 32.15     | 32.18      | 27.06                 | 27.17     | 27.20      |
| Conducted Power (Watts) | 1.62         | 1.64      | 1.65       | 0.51                  | 0.52      | 0.52       |

| PCS Band                |               |           |            |                        |           |            |
|-------------------------|---------------|-----------|------------|------------------------|-----------|------------|
| Modes                   | GSM1900 (GSM) |           |            | GSM1900 (EDGE class 8) |           |            |
| Channel                 | 128 (Low)     | 189 (Mid) | 251 (High) | 128 (Low)              | 189 (Mid) | 251 (High) |
| Frequency (MHz)         | 1850.2        | 1880      | 1909.8     | 1850.2                 | 1880      | 1909.8     |
| Conducted Power (dBm)   | 29.34         | 29.73     | 29.26      | 25.25                  | 25.56     | 25.02      |
| Conducted Power (Watts) | 0.86          | 0.94      | 0.84       | 0.33                   | 0.36      | 0.32       |

**Note:** Maximum burst average power for GSM.

## 3.2 Peak-to-Average Ratio

### 3.2.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. For GSM/EGPRS operating modes:
  - a. Set EUT in maximum power output.
  - b. Set the RBW = 1MHz, VBW = 3MHz, Peak detector on spectrum analyzer for first trace.
  - c. Set the RBW = 1MHz, VBW = 3MHz, RMS detector on spectrum analyzer for second trace.
  - d. The wanted burst signal is triggered by spectrum analyzer, and measured respectively the peak level and Mean level without burst-off time, after system simulator has synchronized with the spectrum analyzer.
3. Record the deviation as Peak to Average Ratio.

### 3.2.4 Test Setup

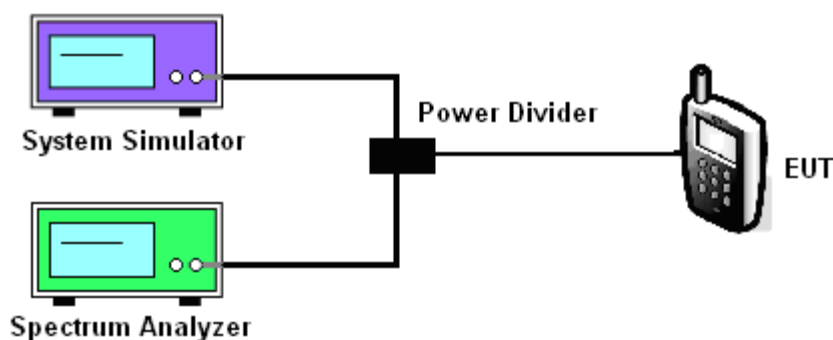


### 3.2.5 Test Result of Peak-to-Average Ratio

| PCS Band                      |               |              |               |                        |              |               |
|-------------------------------|---------------|--------------|---------------|------------------------|--------------|---------------|
| Modes                         | GSM1900 (GSM) |              |               | GSM1900 (EDGE class 8) |              |               |
| Channel                       | 512<br>(Low)  | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) |
| Frequency<br>(MHz)            | 1850.2        | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        |
| Peak-to-Average<br>Ratio (dB) | 0.38          | 0.41         | 0.41          | 2.86                   | 2.75         | 2.69          |


### 3.2.6 Test Result (Plots) of Peak-to-Average Ratio

|        |          |             |                 |
|--------|----------|-------------|-----------------|
| Band : | GSM 1900 | Test Mode : | GSM Link (GMSK) |
|--------|----------|-------------|-----------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

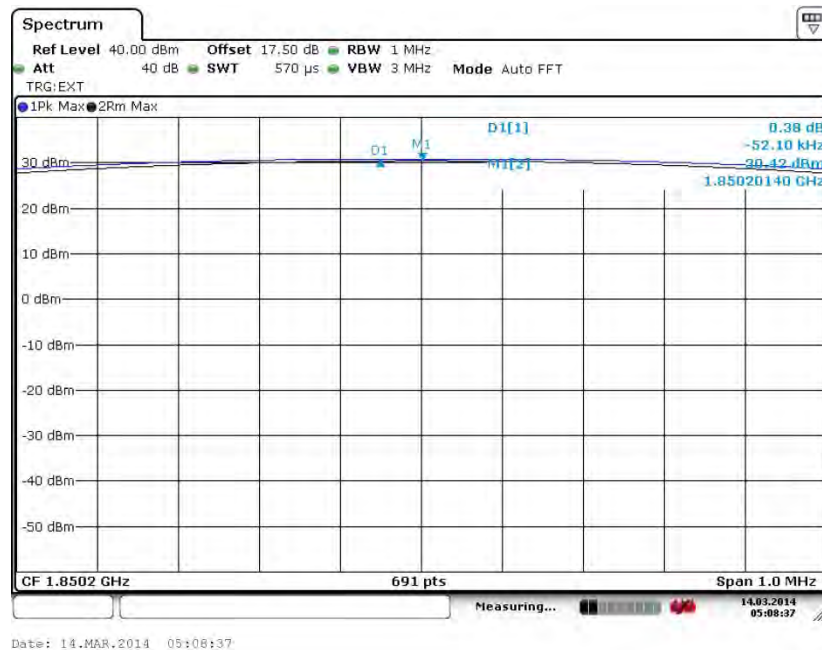


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

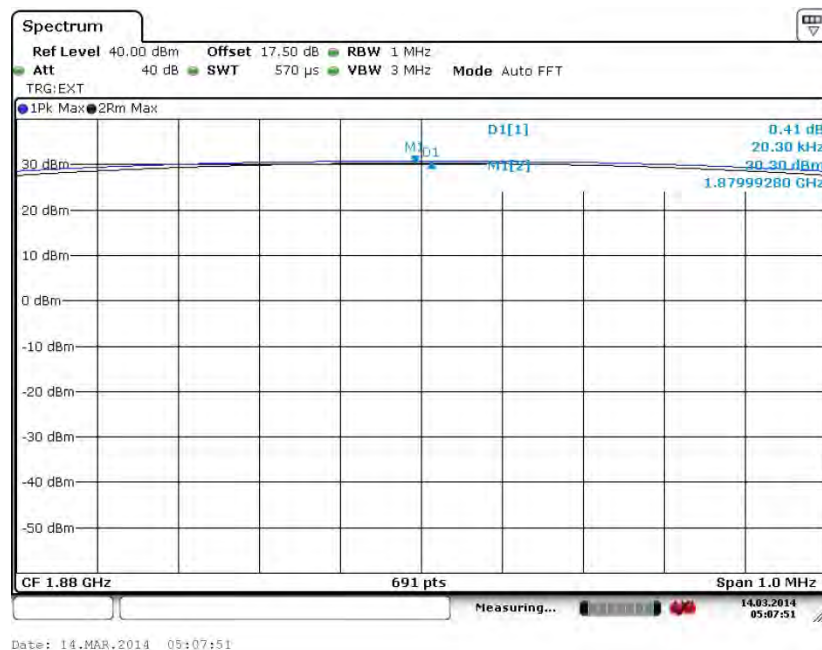



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

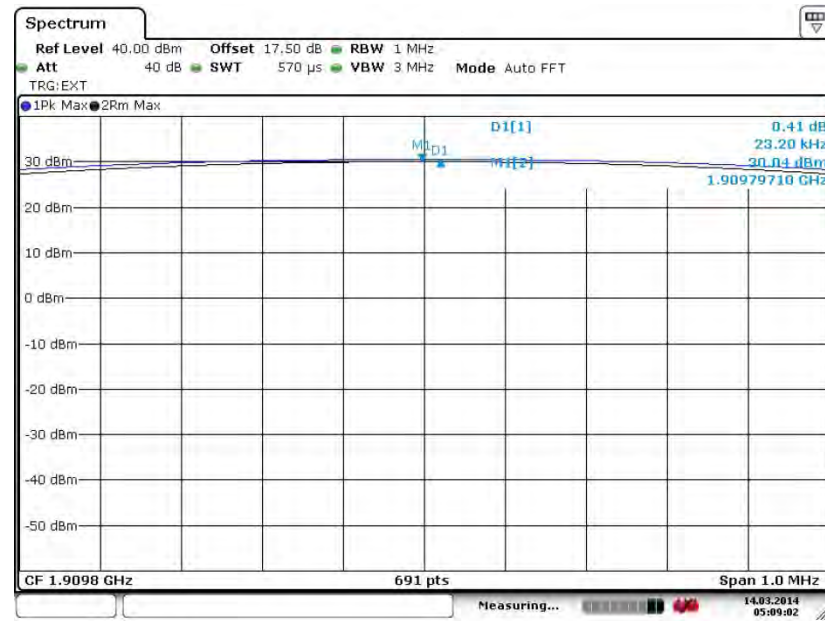


Date: 14.MAR.2014 05:09:03




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

Peak-to-Average Ratio on Channel 512 (1850.2 MHz)

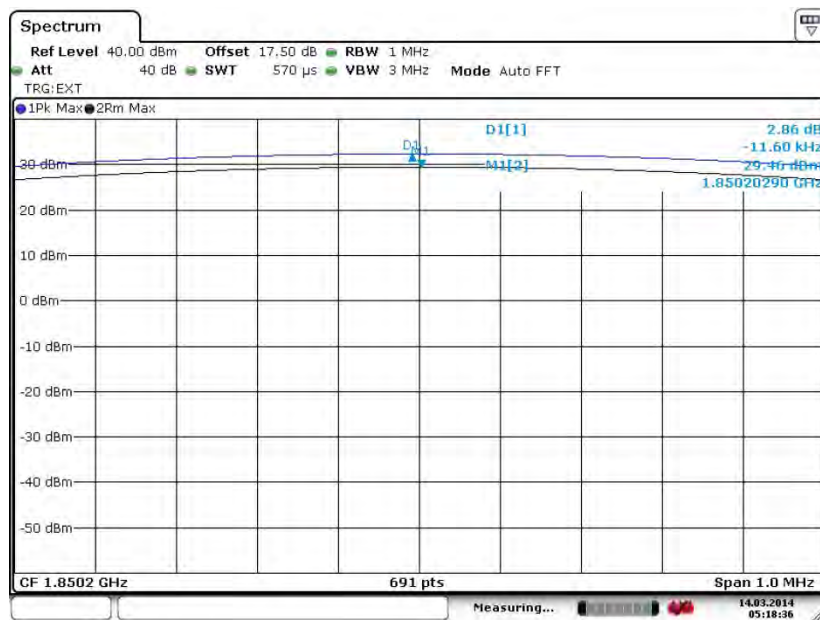

Date: 14.MAR.2014 05:18:36


Peak-to-Average Ratio on Channel 661 (1880.0 MHz)

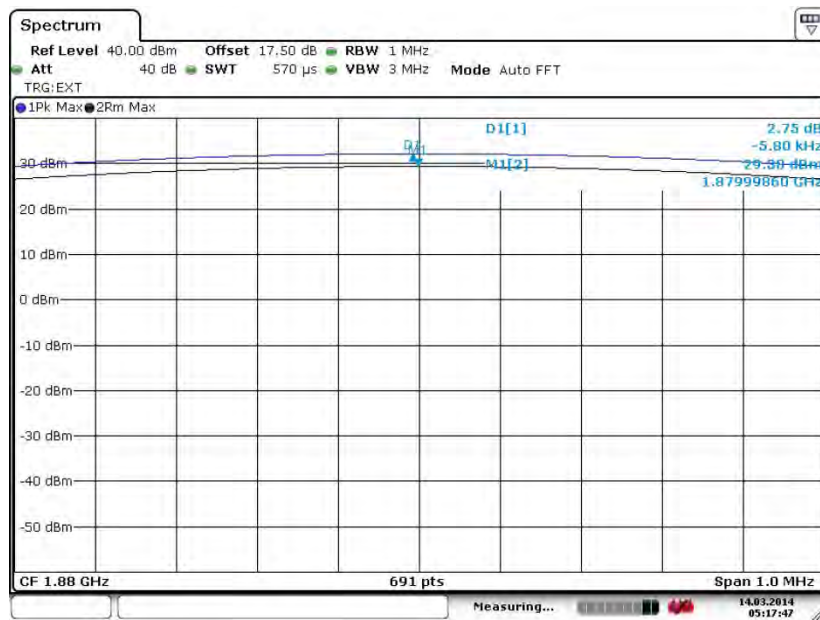

Date: 14.MAR.2014 05:17:47



Peak-to-Average Ratio on Channel 810 (1909.8 MHz)

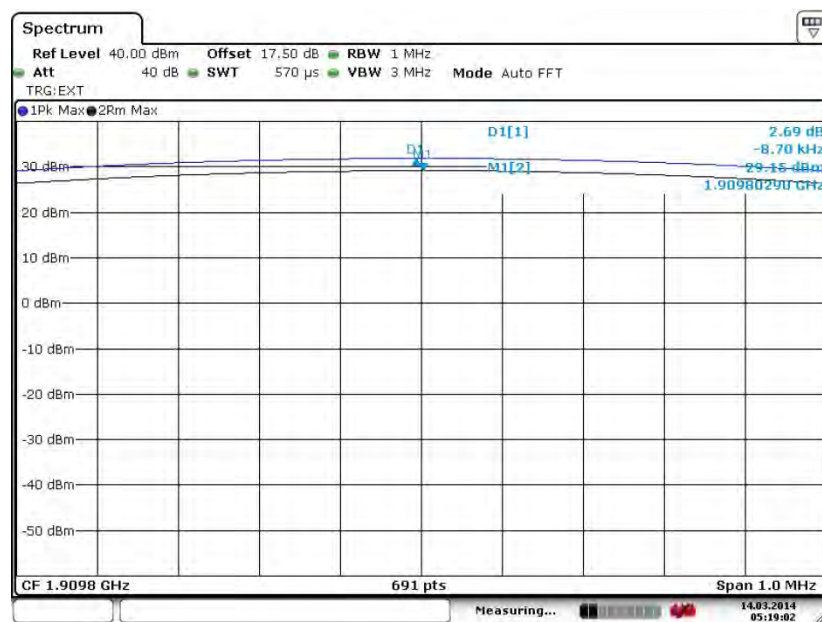

Date: 14.MAR.2014 05:19:03

### 3.3 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

#### 3.3.1 Description of the ERP/EIRP Measurement

The substitution method, in ANSI / TIA / EIA-603-C-2004, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r01. The ERP of mobile transmitters must not exceed 7 Watts and the EIRP of mobile transmitters are limited to 2 Watts.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ .

### 3.3.4 Test Setup

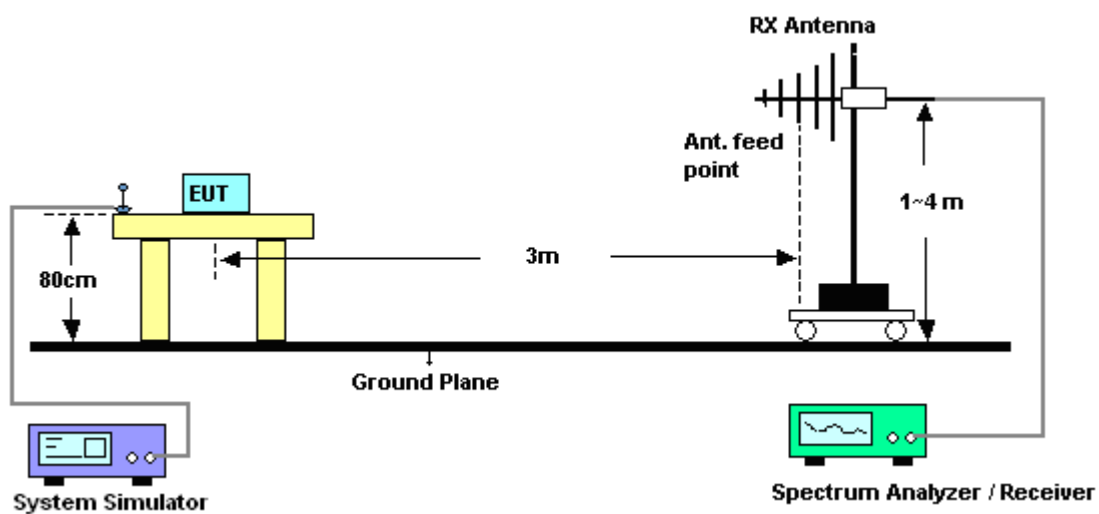

### 3.3.5 Test Result of ERP

| GSM850 (GSM) Radiated Power ERP |              |                           |              |            |
|---------------------------------|--------------|---------------------------|--------------|------------|
| Horizontal Polarization         |              |                           |              |            |
| Frequency<br>(MHz)              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.2                           | -6.02        | 30.23                     | 22.06        | 0.16       |
| 836.4                           | -5.25        | 31.09                     | 23.69        | 0.23       |
| 848.8                           | -3.11        | 30.51                     | 25.25        | 0.34       |
| Vertical Polarization           |              |                           |              |            |
| Frequency<br>(MHz)              | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.2                           | -7.74        | 35.14                     | 25.25        | 0.34       |
| 836.4                           | -6.39        | 36.01                     | 27.47        | 0.56       |
| 848.8                           | -4.95        | 35.11                     | 28.01        | 0.63       |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

| GSM850 (EDGE class 8) Radiated Power ERP |              |                           |              |            |
|------------------------------------------|--------------|---------------------------|--------------|------------|
| Horizontal Polarization                  |              |                           |              |            |
| Frequency<br>(MHz)                       | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.2                                    | -11.69       | 30.23                     | 16.39        | 0.04       |
| 836.4                                    | -10.05       | 31.09                     | 18.89        | 0.08       |
| 848.8                                    | -8.98        | 30.51                     | 19.38        | 0.09       |
| Vertical Polarization                    |              |                           |              |            |
| Frequency<br>(MHz)                       | LVL<br>(dBm) | Correction Factor<br>(dB) | ERP<br>(dBm) | ERP<br>(W) |
| 824.2                                    | -11.66       | 35.14                     | 21.33        | 0.14       |
| 836.4                                    | -11.79       | 36.01                     | 22.07        | 0.16       |
| 848.8                                    | -10.88       | 35.11                     | 22.08        | 0.16       |

\* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

**3.3.6 Test Result of EIRP**

| <b>GSM1900 (GSM) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                  |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>               | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.2                                   | -16.43               | 46.02                             | 29.59                 | 0.91                |
| 1880.0                                   | -15.20               | 44.73                             | 29.53                 | 0.90                |
| 1909.8                                   | -15.69               | 45.20                             | 29.51                 | 0.89                |
| Vertical Polarization                    |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>               | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.2                                   | -17.46               | 45.58                             | 28.12                 | 0.65                |
| 1880.0                                   | -16.85               | 45.75                             | 28.90                 | 0.78                |
| 1909.8                                   | -17.71               | 47.21                             | 29.50                 | 0.89                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

| <b>GSM1900 (EDGE class 8) Radiated Power EIRP</b> |                      |                                   |                       |                     |
|---------------------------------------------------|----------------------|-----------------------------------|-----------------------|---------------------|
| Horizontal Polarization                           |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.2                                            | -20.45               | 46.02                             | 25.57                 | 0.36                |
| 1880.0                                            | -18.98               | 44.73                             | 25.75                 | 0.38                |
| 1909.8                                            | -20.04               | 45.20                             | 25.16                 | 0.33                |
| Vertical Polarization                             |                      |                                   |                       |                     |
| <b>Frequency<br/>(MHz)</b>                        | <b>LVL<br/>(dBm)</b> | <b>Correction Factor<br/>(dB)</b> | <b>EIRP<br/>(dBm)</b> | <b>EIRP<br/>(W)</b> |
| 1850.2                                            | -21.41               | 45.58                             | 24.17                 | 0.26                |
| 1880.0                                            | -22.06               | 45.75                             | 23.69                 | 0.23                |
| 1909.8                                            | -24.15               | 47.21                             | 23.06                 | 0.20                |

\* EIRP = LVL (dBm) + Correction Factor (dB)

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


#### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.4.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3\*RBW, sample detector, trace maximum hold.
4. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3\*RBW, peak detector, trace maximum hold.

#### 3.4.4 Test Setup

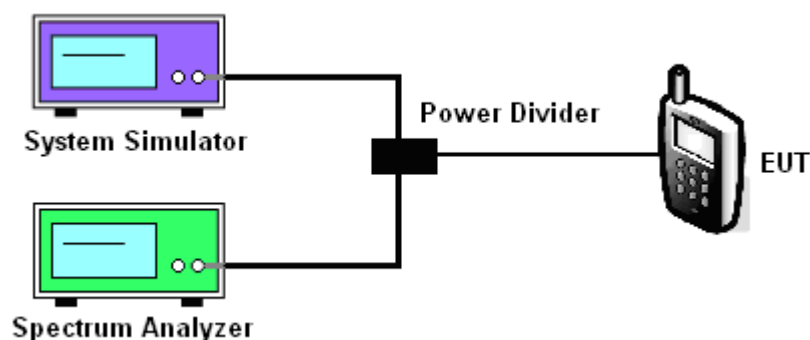

**3.4.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth**


| Cellular Band   |              |              |               |                       |              |               |
|-----------------|--------------|--------------|---------------|-----------------------|--------------|---------------|
| Modes           | GSM850 (GSM) |              |               | GSM850 (EDGE class 8) |              |               |
| Channel         | 128<br>(Low) | 189<br>(Mid) | 251<br>(High) | 128<br>(Low)          | 189<br>(Mid) | 251<br>(High) |
| Frequency (MHz) | 824.2        | 836.4        | 848.8         | 824.2                 | 836.4        | 848.8         |
| 99% OBW (kHz)   | 241.68       | 243.13       | 244.57        | 241.68                | 243.13       | 244.57        |
| 26dB BW (kHz)   | 314.00       | 314.00       | 315.50        | 305.40                | 305.40       | 308.20        |

| PCS Band        |               |              |               |                        |              |               |
|-----------------|---------------|--------------|---------------|------------------------|--------------|---------------|
| Modes           | GSM1900 (GSM) |              |               | GSM1900 (EDGE class 8) |              |               |
| Channel         | 512<br>(Low)  | 661<br>(Mid) | 810<br>(High) | 512<br>(Low)           | 661<br>(Mid) | 810<br>(High) |
| Frequency (MHz) | 1850.2        | 1880         | 1909.8        | 1850.2                 | 1880         | 1909.8        |
| 99% OBW (kHz)   | 247.47        | 244.57       | 244.57        | 247.47                 | 243.13       | 244.57        |
| 26dB BW (kHz)   | 315.50        | 316.90       | 315.50        | 312.60                 | 314.00       | 314.00        |


## 3.4.6 Test Result (Plots) of 99% Occupied Bandwidth and 26dB Bandwidth

|        |         |             |                 |
|--------|---------|-------------|-----------------|
| Band : | GSM 850 | Test Mode : | GSM Link (GMSK) |
|--------|---------|-------------|-----------------|


99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

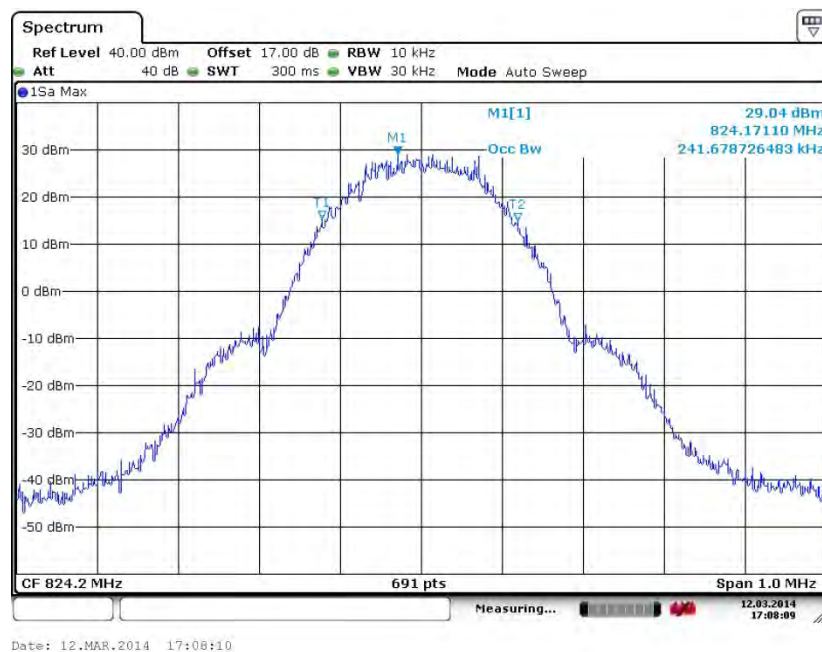

26dB Bandwidth Plot on Channel 128 (824.2 MHz)

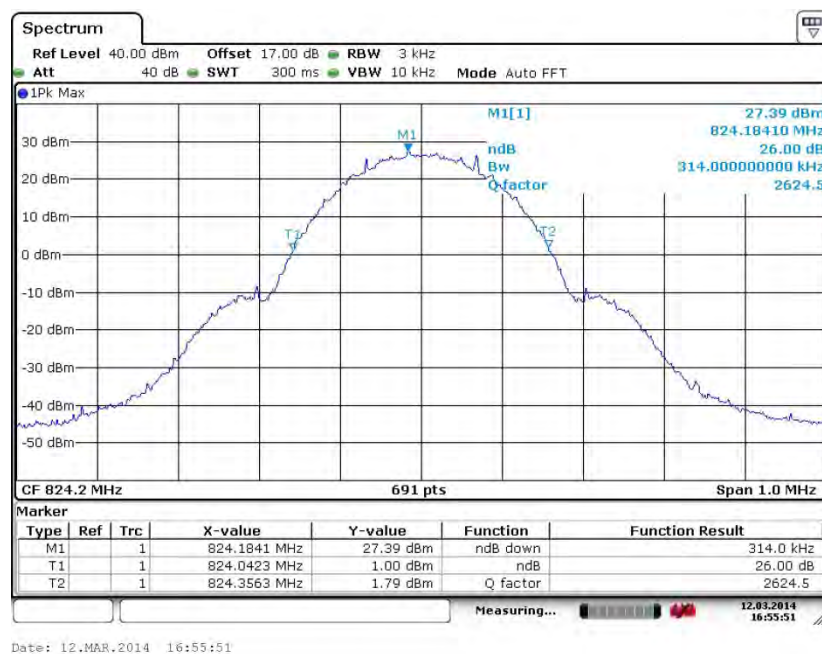


### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

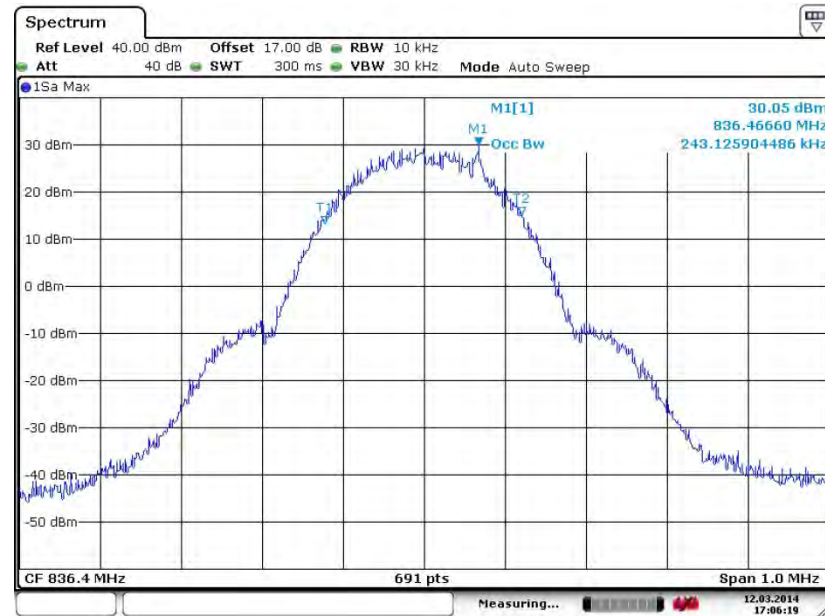


Date: 12.MAR.2014 17:06:20

### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

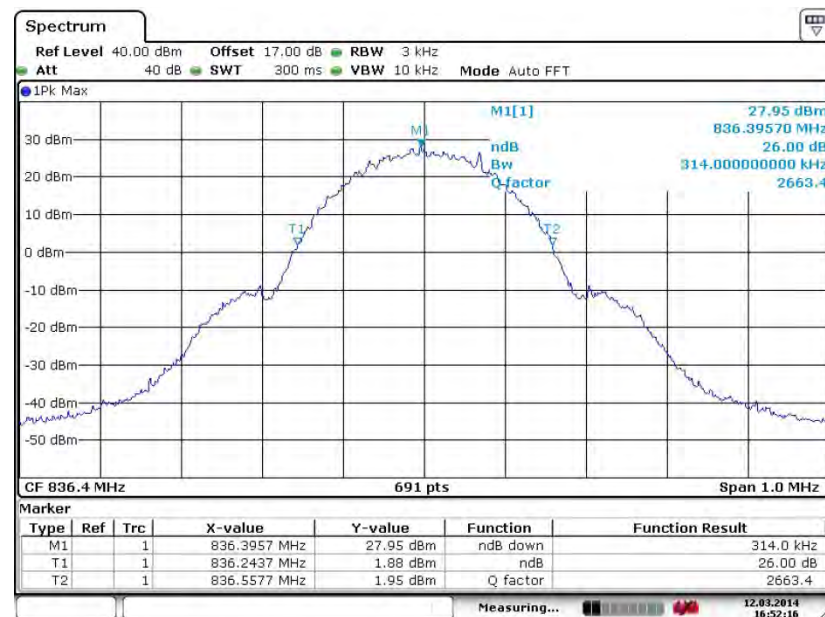


Date: 12.MAR.2014 16:52:15

### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

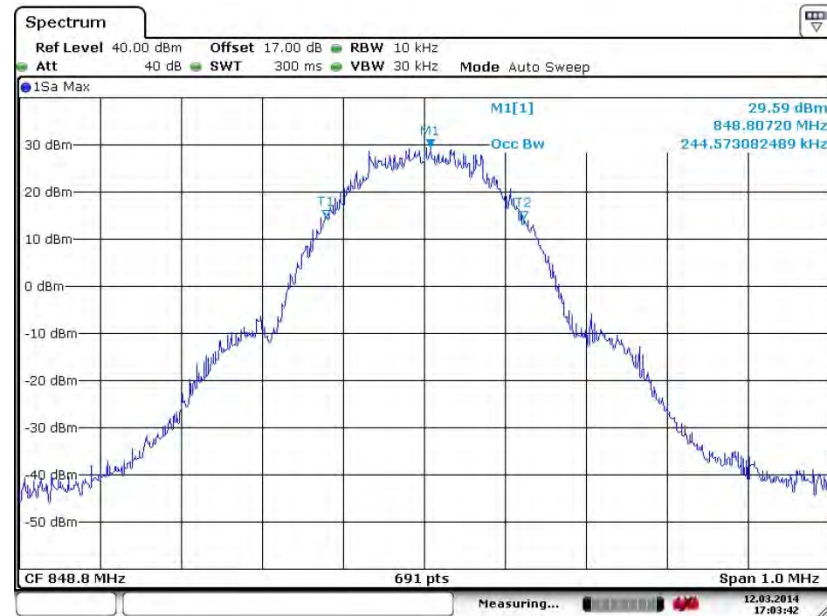

Date: 12.MAR.2014 17:03:42


### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

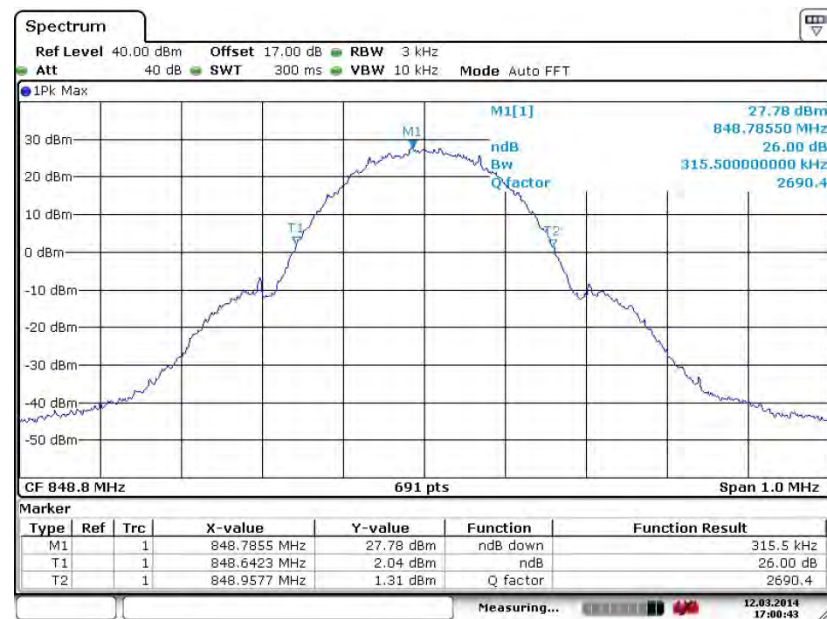

Date: 12.MAR.2014 17:00:43


|        |         |             |                          |
|--------|---------|-------------|--------------------------|
| Band : | GSM 850 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|---------|-------------|--------------------------|

### 99% Occupied Bandwidth Plot on Channel 128 (824.2 MHz)

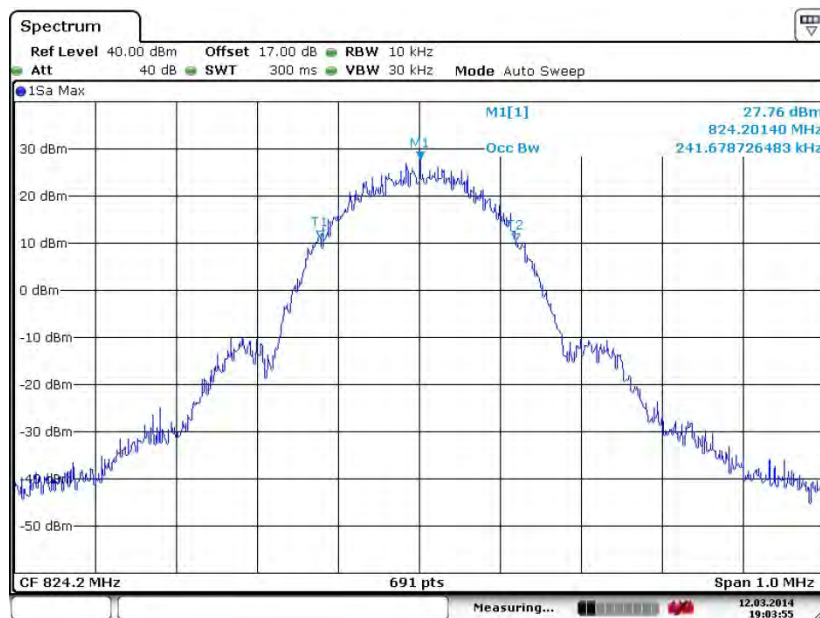


Date: 12.MAR.2014 19:03:55

### 26dB Bandwidth Plot on Channel 128 (824.2 MHz)

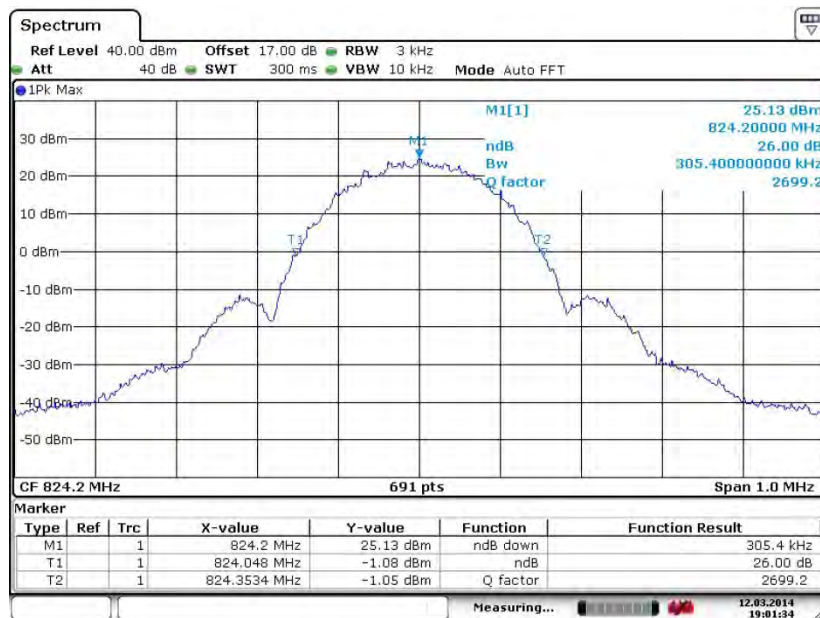


Date: 12.MAR.2014 19:01:35

### 99% Occupied Bandwidth Plot on Channel 189 (836.4 MHz)

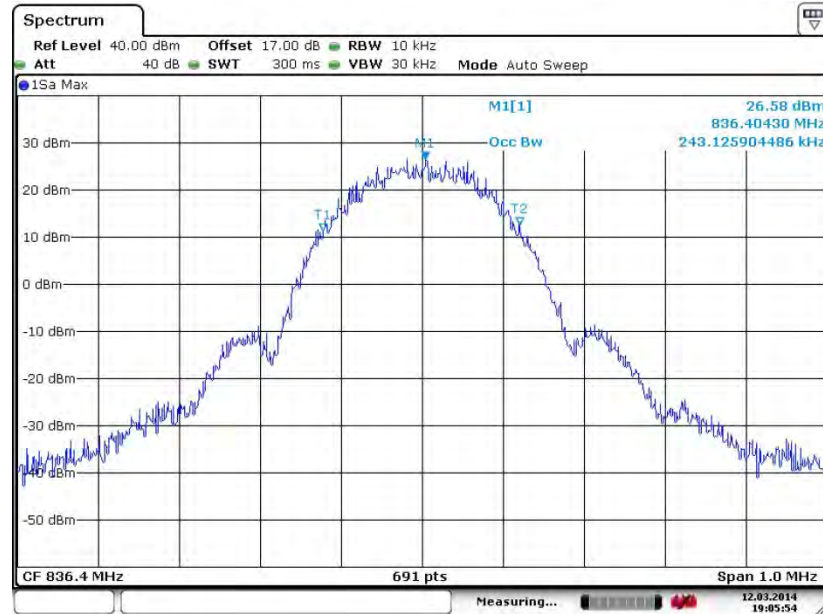


Date: 12.MAR.2014 19:05:53

### 26dB Bandwidth Plot on Channel 189 (836.4 MHz)

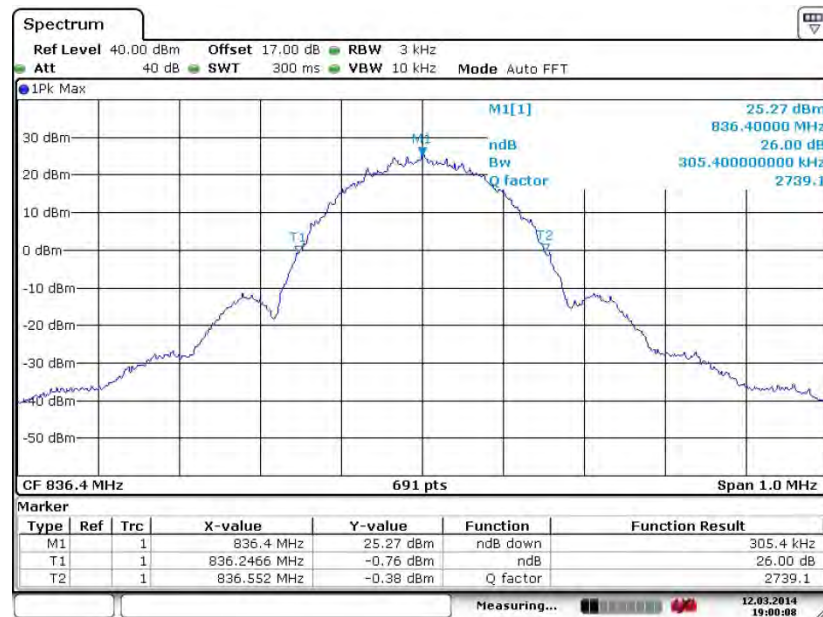


Date: 12.MAR.2014 19:00:08

### 99% Occupied Bandwidth Plot on Channel 251 (848.8 MHz)

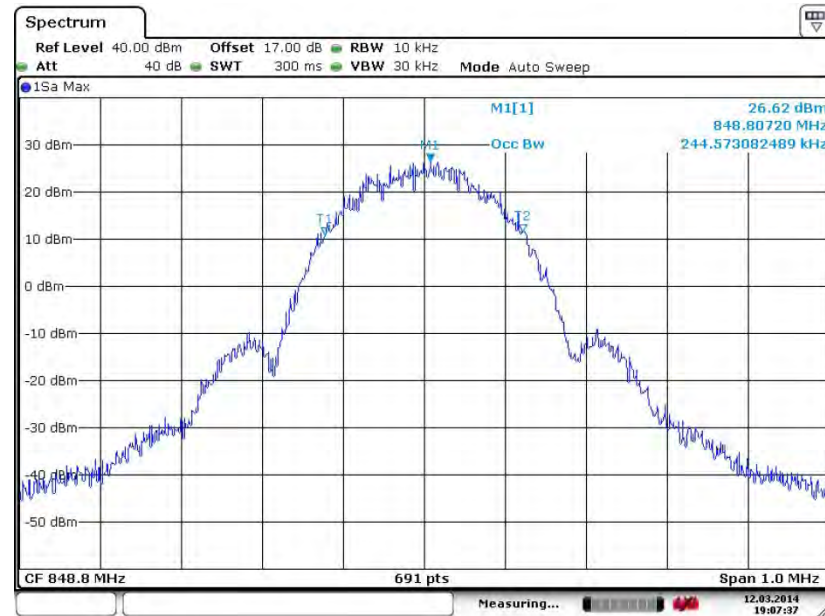

Date: 12.MAR.2014 19:07:38

### 26dB Bandwidth Plot on Channel 251 (848.8 MHz)

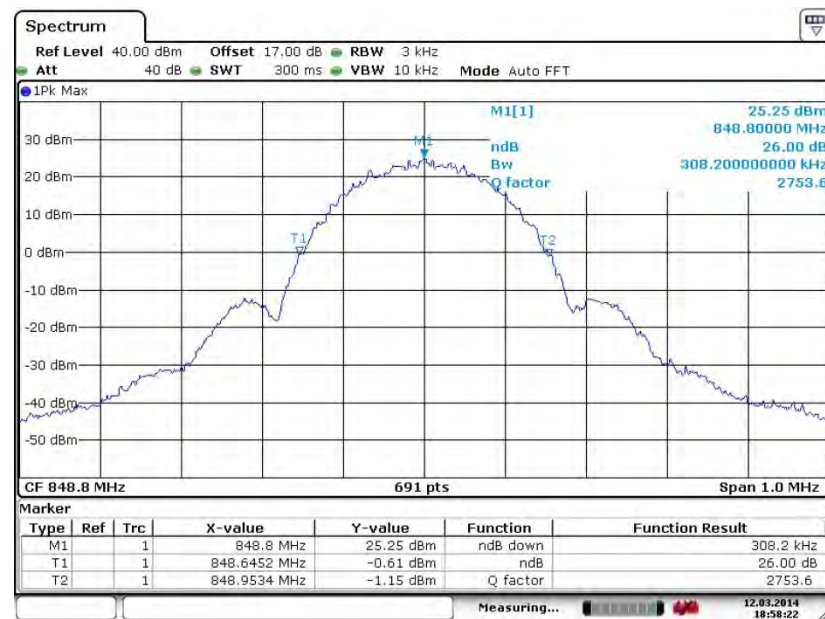


Date: 12.MAR.2014 18:58:22




|        |          |             |                 |
|--------|----------|-------------|-----------------|
| Band : | GSM 1900 | Test Mode : | GSM Link (GMSK) |
|--------|----------|-------------|-----------------|

## 99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

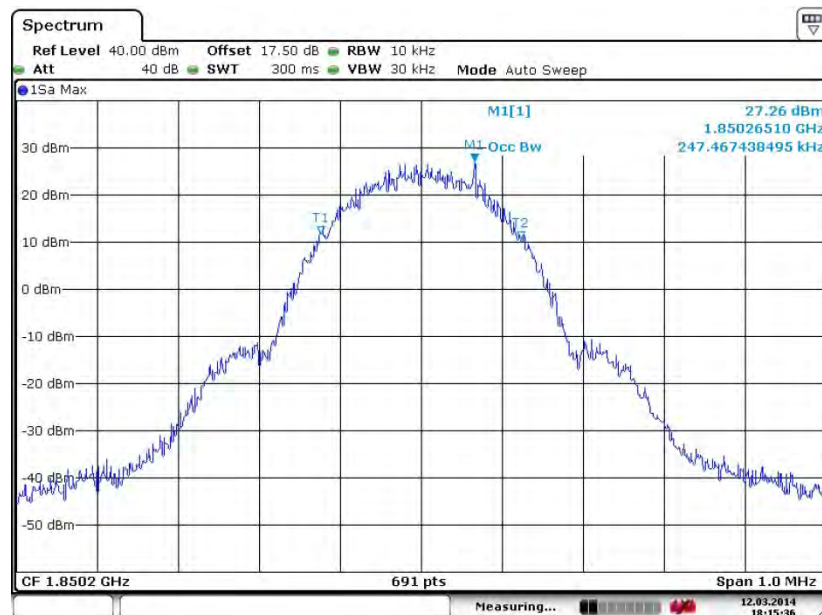

Date: 12.MAR.2014 18:15:35


## 26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

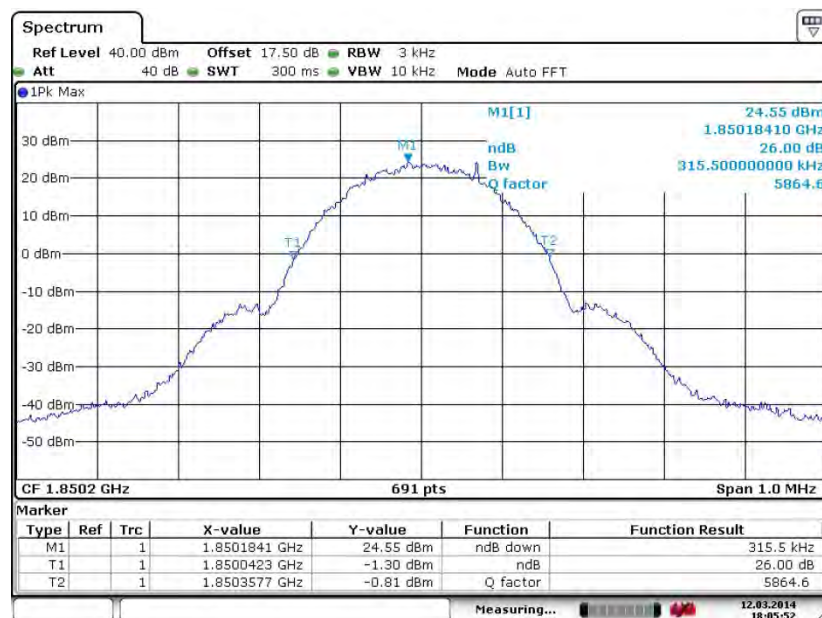


Date: 12.MAR.2014 18:05:52




## 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

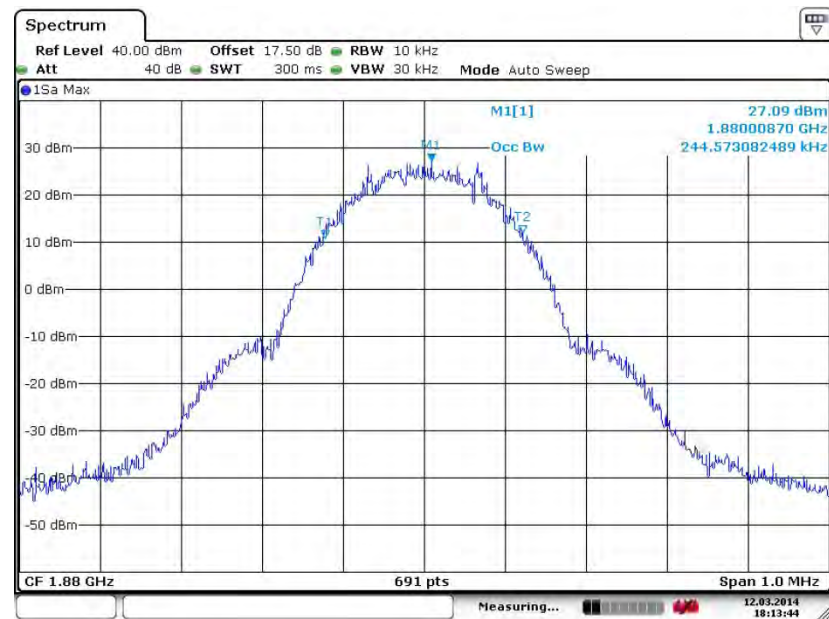

## 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

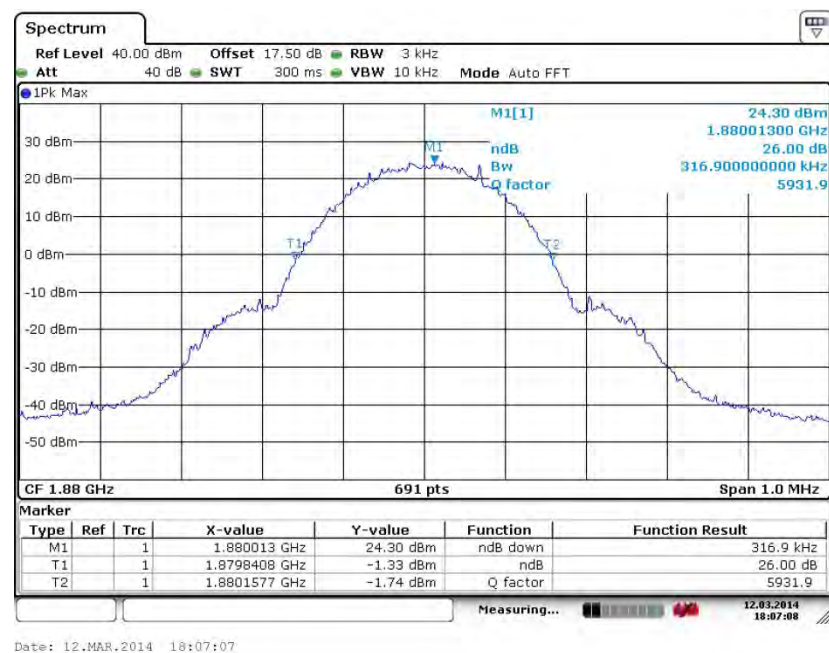


### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

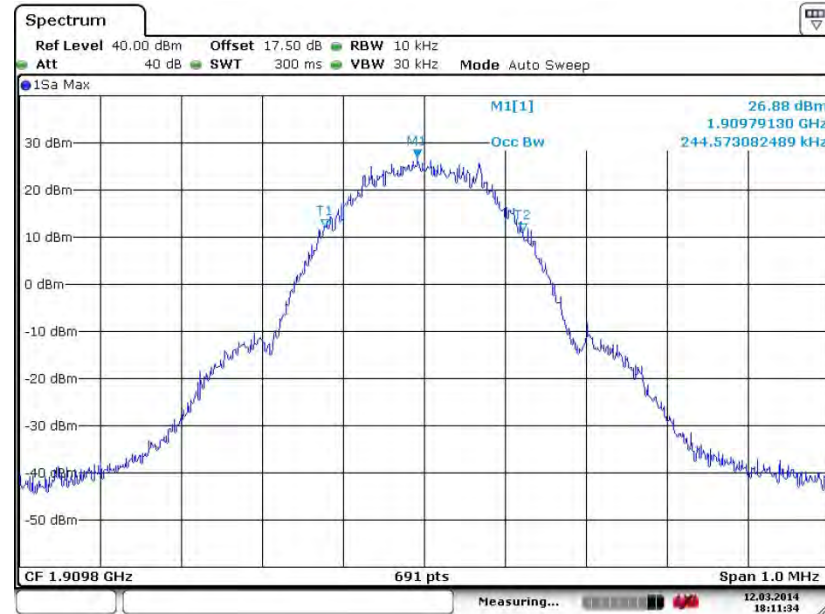

Date: 12.MAR.2014 18:11:33

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

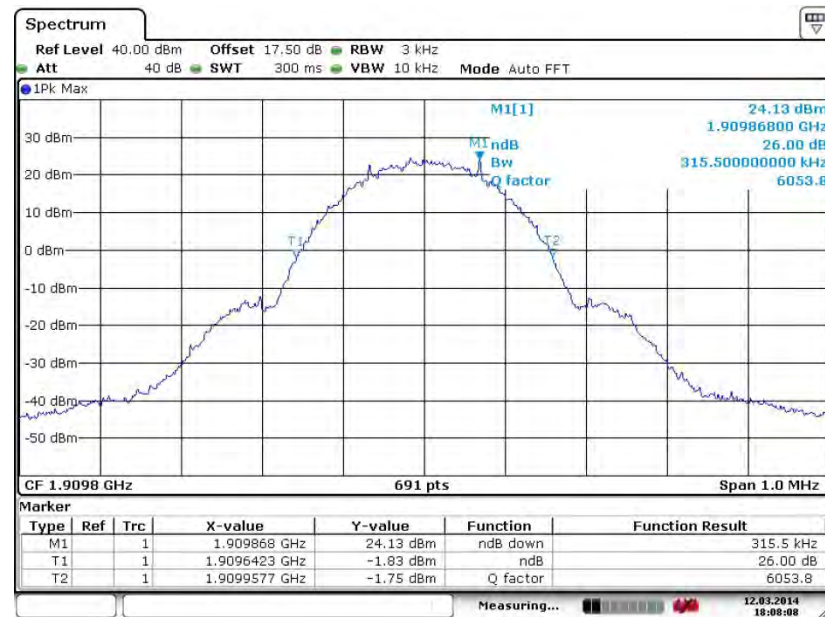


Date: 12.MAR.2014 18:08:07




|        |          |             |                          |
|--------|----------|-------------|--------------------------|
| Band : | GSM 1900 | Test Mode : | EDGE class 8 Link (8PSK) |
|--------|----------|-------------|--------------------------|

## 99% Occupied Bandwidth Plot on Channel 512 (1850.2 MHz)

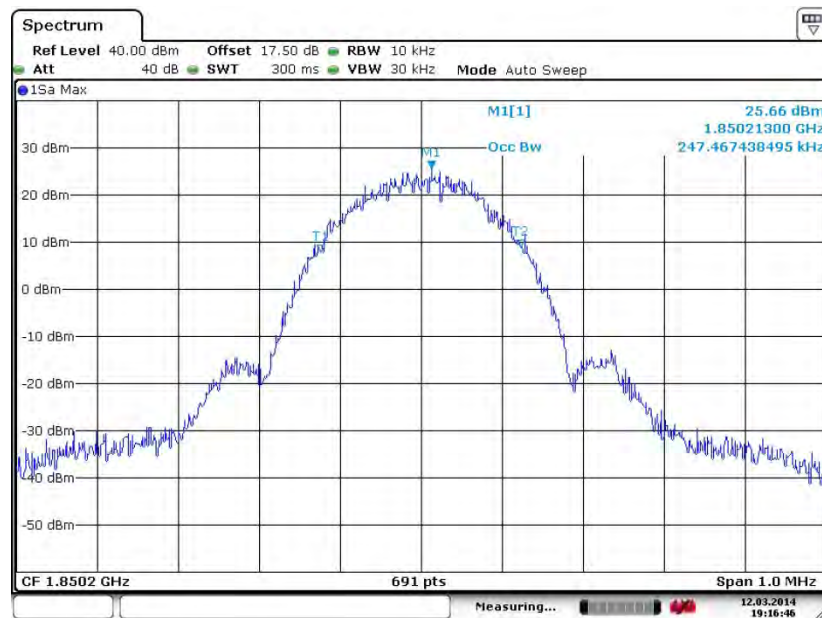


Date: 12.MAR.2014 19:16:45

## 26dB Bandwidth Plot on Channel 512 (1850.2 MHz)

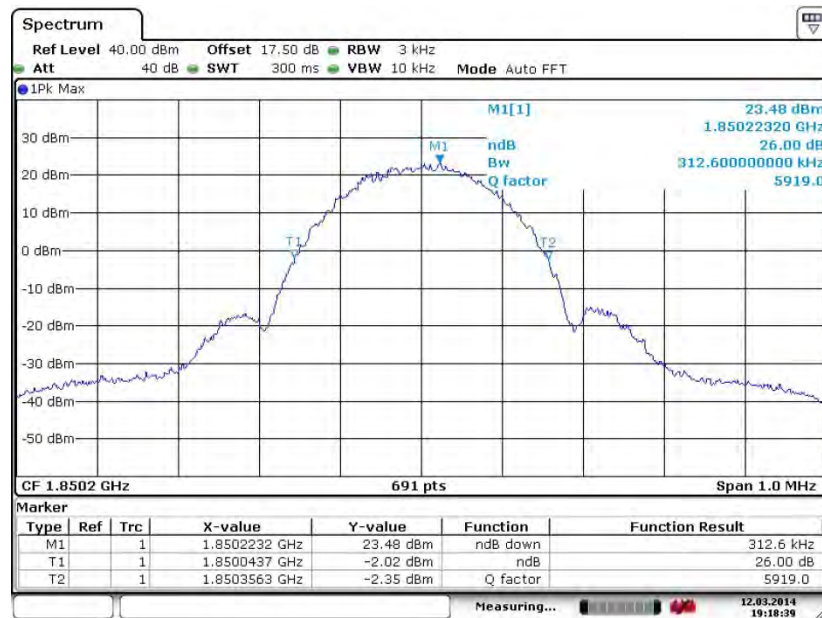


Date: 12.MAR.2014 19:18:38

### 99% Occupied Bandwidth Plot on Channel 661 (1880.0 MHz)

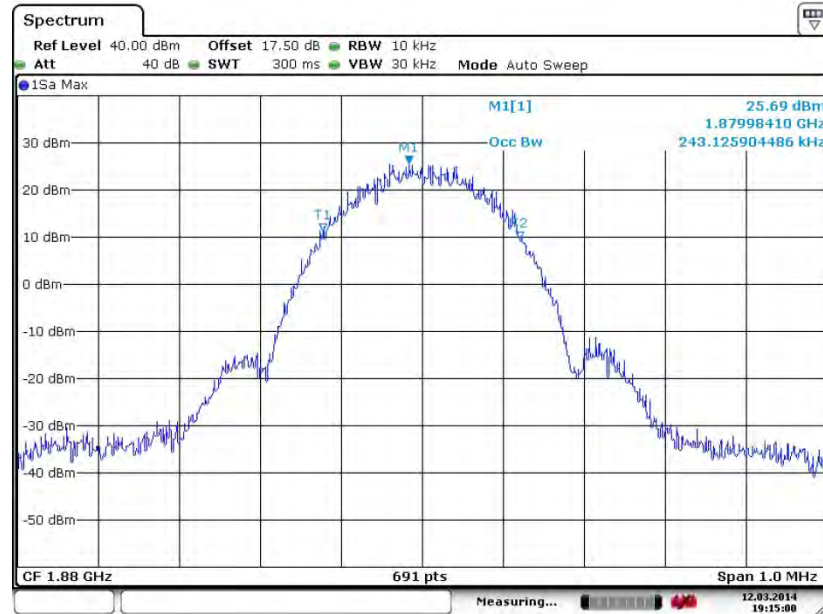


Date: 12.MAR.2014 19:15:01

### 26dB Bandwidth Plot on Channel 661 (1880.0 MHz)

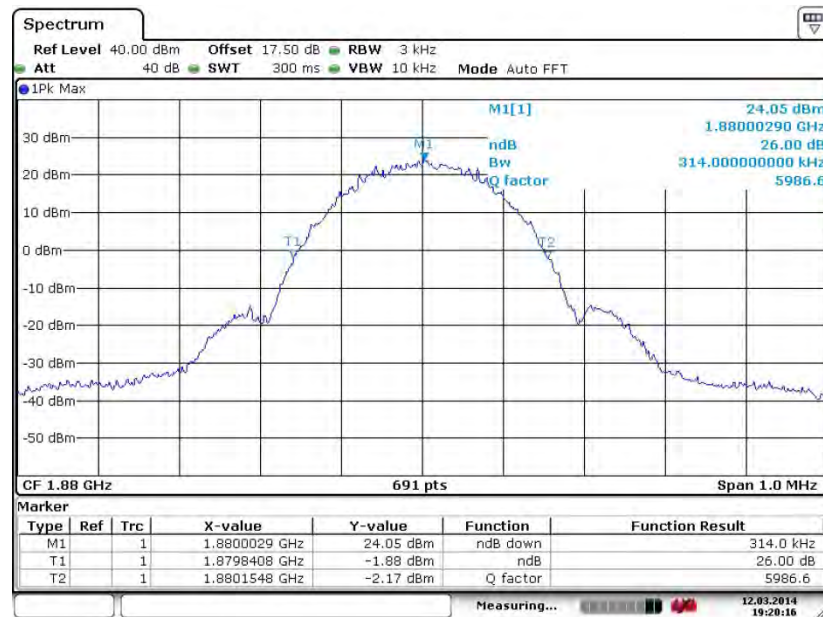


Date: 12.MAR.2014 19:20:16

### 99% Occupied Bandwidth Plot on Channel 810 (1909.8 MHz)

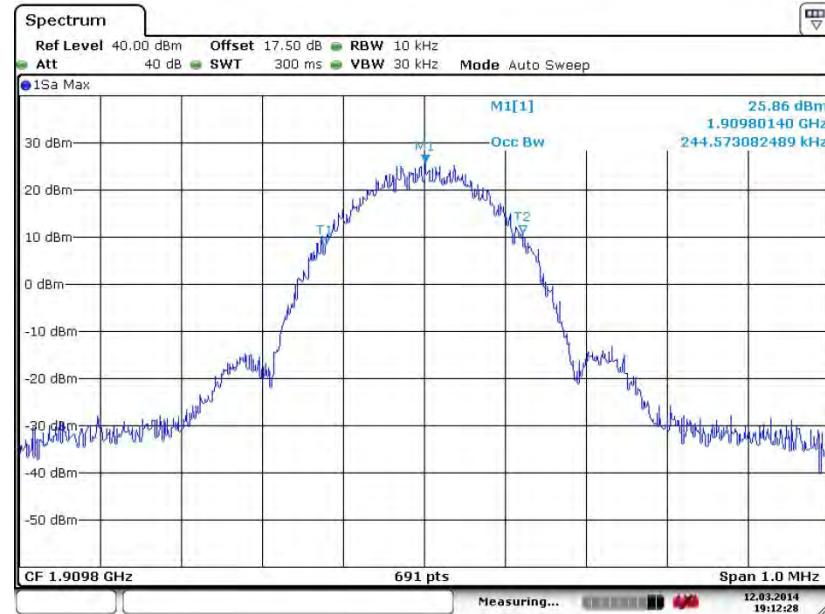

Date: 12.MAR.2014 19:12:29

### 26dB Bandwidth Plot on Channel 810 (1909.8 MHz)

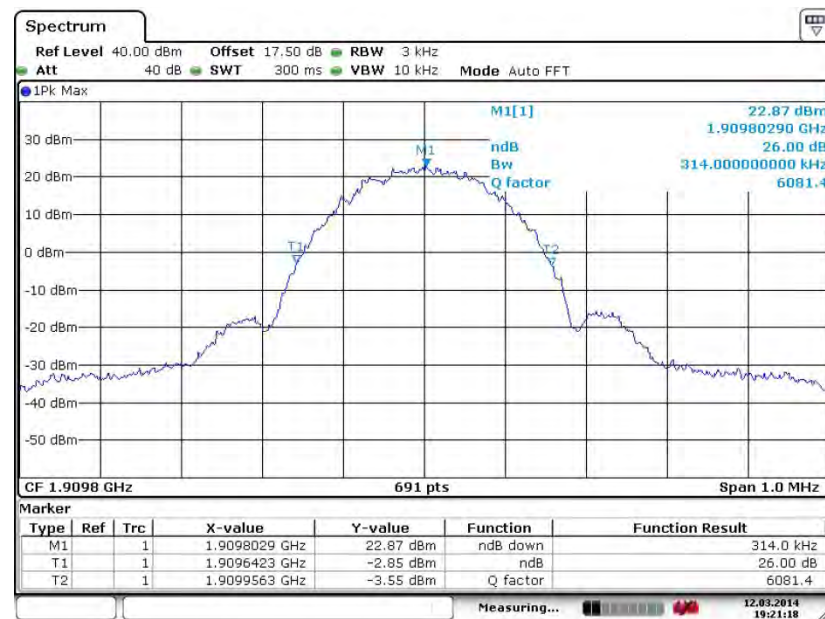

Date: 12.MAR.2014 19:21:17

### 3.5 Band Edge Measurement

#### 3.5.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$


#### 3.5.4 Test Setup

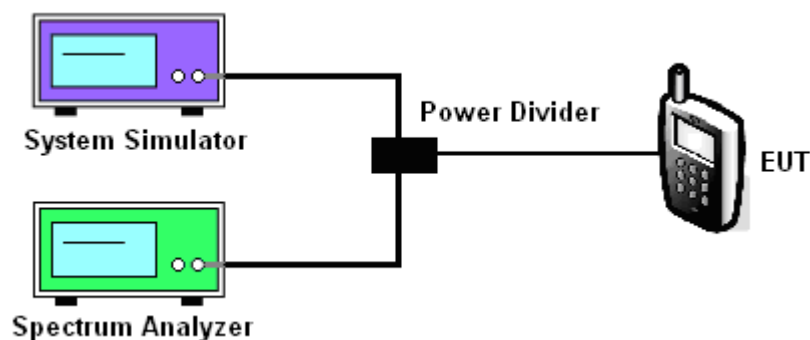

### 3.5.5 Test Result (Plots) of Conducted Band Edge

|                            |           |                                 |                 |
|----------------------------|-----------|---------------------------------|-----------------|
| <b>Band :</b>              | GSM850    | <b>Test Mode :</b>              | GSM Link (GMSK) |
| <b>Correction Factor :</b> | 0.22dB    | <b>Maximum 26dB Bandwidth :</b> | 0.316MHz        |
| <b>Band Edge :</b>         | -15.05dBm | <b>Measurement Value :</b>      | -15.27dBm       |


**Lower Band Edge Plot on Channel 128 (824.2 MHz)**

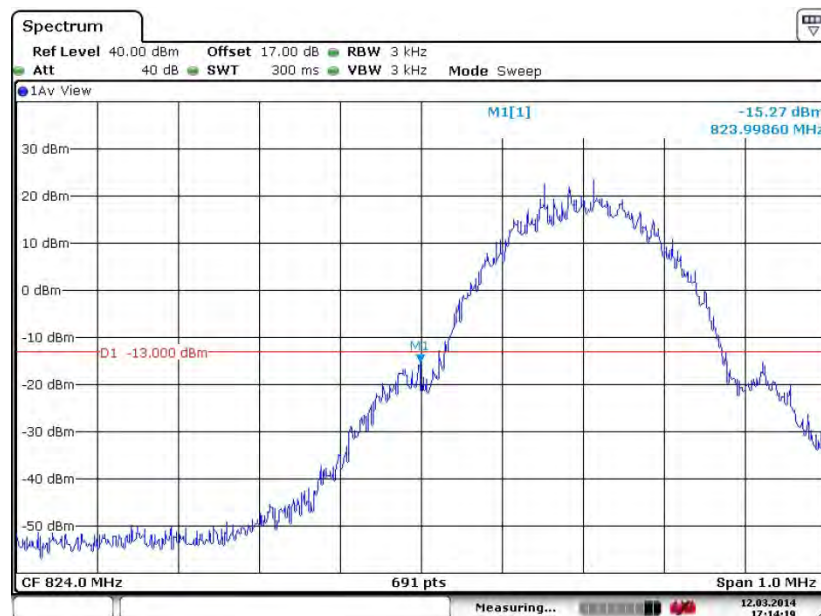

Date: 12.MAR.2014 17:14:18


1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                 |
|----------------------------|-----------|---------------------------------|-----------------|
| <b>Band :</b>              | GSM850    | <b>Test Mode :</b>              | GSM Link (GMSK) |
| <b>Correction Factor :</b> | 0.22dB    | <b>Maximum 26dB Bandwidth :</b> | 0.316MHz        |
| <b>Band Edge :</b>         | -15.52dBm | <b>Measurement Value :</b>      | -15.74dBm       |

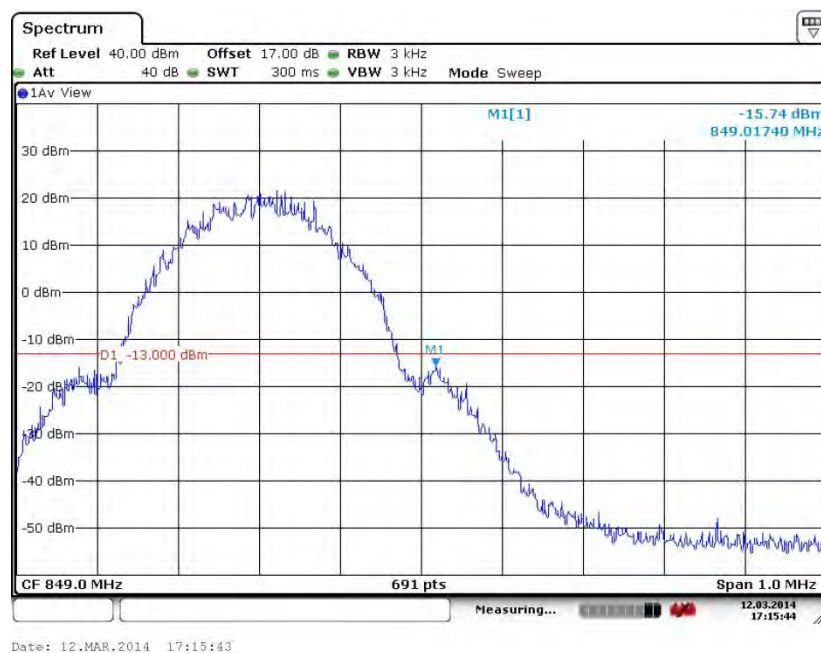**Higher Band Edge Plot on Channel 251 (848.8 MHz)**


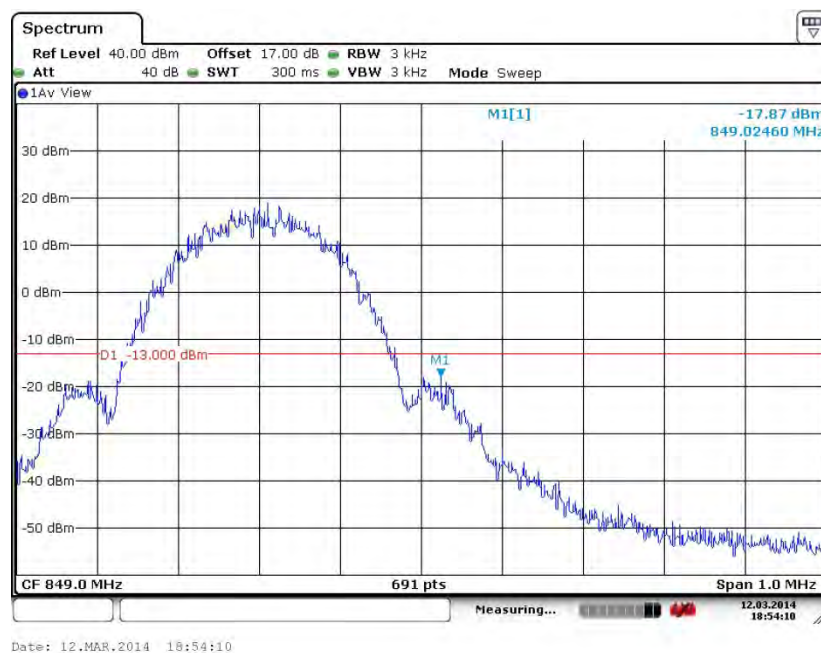
1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                          |
|----------------------------|-----------|---------------------------------|--------------------------|
| <b>Band :</b>              | GSM850    | <b>Test Mode :</b>              | EDGE class 8 Link (8PSK) |
| <b>Correction Factor :</b> | 0.12dB    | <b>Maximum 26dB Bandwidth :</b> | 0.308MHz                 |
| <b>Band Edge :</b>         | -18.43dBm | <b>Measurement Value :</b>      | -18.55dBm                |

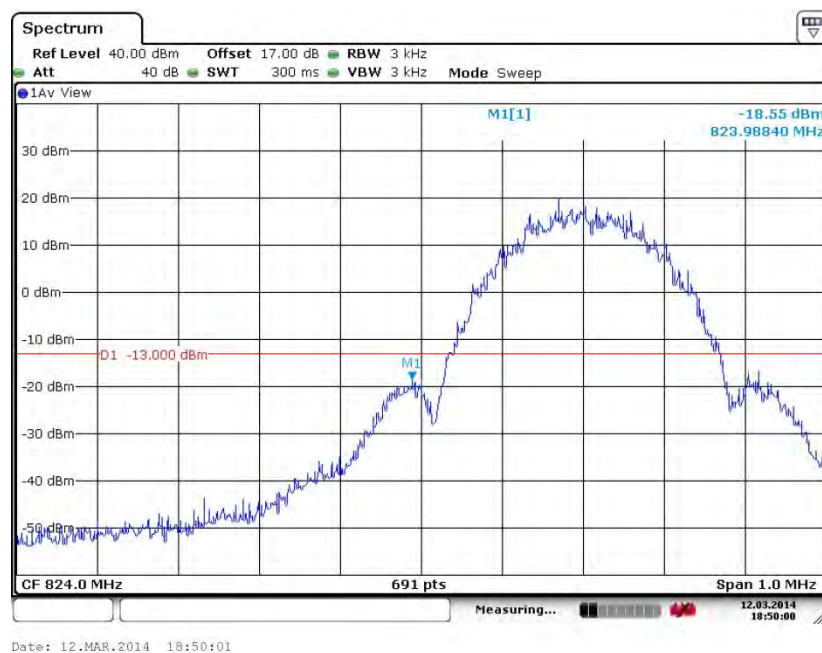**Lower Band Edge Plot on Channel 128 (824.2 MHz)**


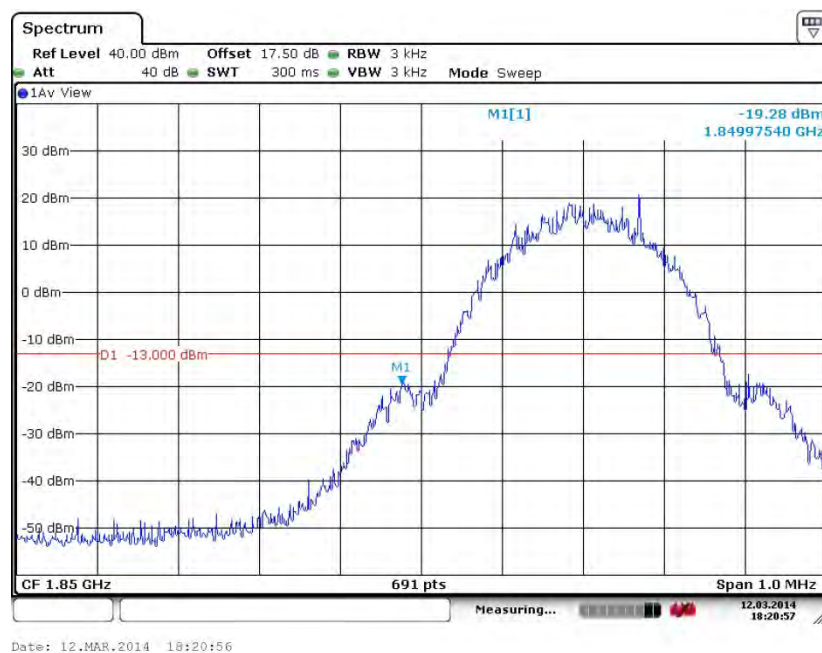
1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                          |
|----------------------------|-----------|---------------------------------|--------------------------|
| <b>Band :</b>              | GSM850    | <b>Test Mode :</b>              | EDGE class 8 Link (8PSK) |
| <b>Correction Factor :</b> | 0.12dB    | <b>Maximum 26dB Bandwidth :</b> | 0.308MHz                 |
| <b>Band Edge :</b>         | -17.75dBm | <b>Measurement Value :</b>      | -17.87dBm                |

**Higher Band Edge Plot on Channel 251 (848.8 MHz)**


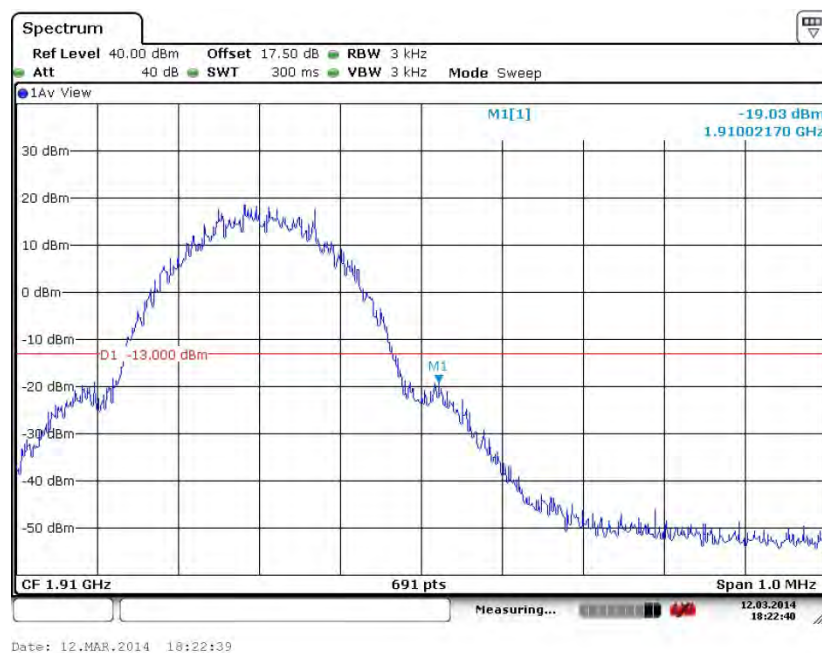
1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                 |
|----------------------------|-----------|---------------------------------|-----------------|
| <b>Band :</b>              | GSM1900   | <b>Test Mode :</b>              | GSM Link (GMSK) |
| <b>Correction Factor :</b> | 0.24dB    | <b>Maximum 26dB Bandwidth :</b> | 0.317MHz        |
| <b>Band Edge :</b>         | -19.04dBm | <b>Measurement Value :</b>      | -19.28dBm       |

**Lower Band Edge Plot on Channel 512 (1850.2 MHz)**


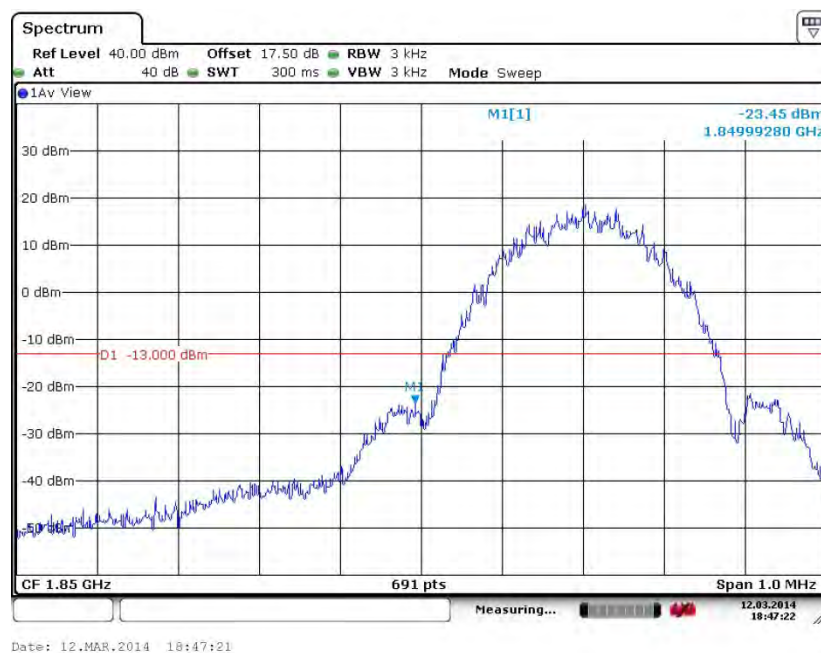
1. Correction Factor(dB)= 10log(1% Emission BW/RBW)
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                 |
|----------------------------|-----------|---------------------------------|-----------------|
| <b>Band :</b>              | GSM1900   | <b>Test Mode :</b>              | GSM Link (GMSK) |
| <b>Correction Factor :</b> | 0.24dB    | <b>Maximum 26dB Bandwidth :</b> | 0.317MHz        |
| <b>Band Edge :</b>         | -18.79dBm | <b>Measurement Value :</b>      | -19.03dBm       |

**Higher Band Edge Plot on Channel 810 (1909.8 MHz)**


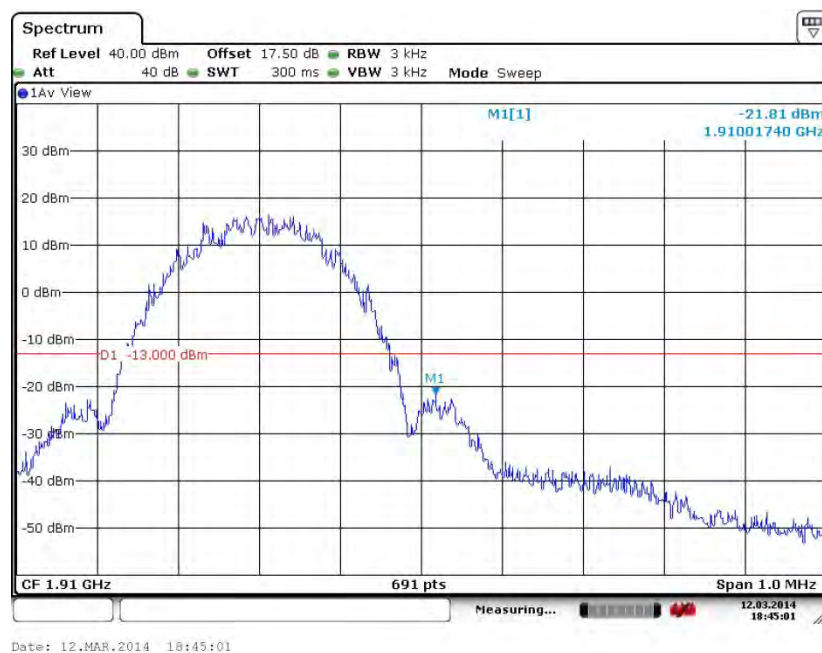
1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                          |
|----------------------------|-----------|---------------------------------|--------------------------|
| <b>Band :</b>              | GSM1900   | <b>Test Mode :</b>              | EDGE class 8 Link (8PSK) |
| <b>Correction Factor :</b> | 0.20dB    | <b>Maximum 26dB Bandwidth :</b> | 0.314MHz                 |
| <b>Band Edge :</b>         | -23.25dBm | <b>Measurement Value :</b>      | -23.45dBm                |

**Lower Band Edge Plot on Channel 512 (1850.2 MHz)**


1. Correction Factor(dB)=  $10\log(1\% \text{ Emission BW/RBW})$
2. Band Edge= Measurement Value + Correction Factor(dB)

|                            |           |                                 |                          |
|----------------------------|-----------|---------------------------------|--------------------------|
| <b>Band :</b>              | GSM1900   | <b>Test Mode :</b>              | EDGE class 8 Link (8PSK) |
| <b>Correction Factor :</b> | 0.20dB    | <b>Maximum 26dB Bandwidth :</b> | 0.314MHz                 |
| <b>Band Edge :</b>         | -21.61dBm | <b>Measurement Value :</b>      | -21.81dBm                |

**Higher Band Edge Plot on Channel 810 (1909.8 MHz)**


1.  $\text{Correction Factor(dB)} = 10\log(1\% \text{ Emission BW/RBW})$
2.  $\text{Band Edge} = \text{Measurement Value} + \text{Correction Factor(dB)}$

## 3.6 Conducted Spurious Emission Measurement

### 3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.


### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.6.3 Test Procedures



1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.6.4 Test Setup

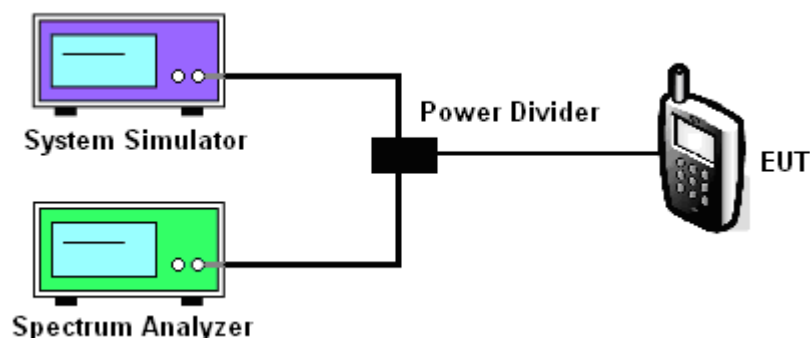


### 3.6.5 Test Result (Plots) of Conducted Spurious Emission

|                    |                 |                    |           |
|--------------------|-----------------|--------------------|-----------|
| <b>Band :</b>      | GSM850          | <b>Channel :</b>   | CH128     |
| <b>Test Mode :</b> | GSM Link (GMSK) | <b>Frequency :</b> | 824.2 MHz |

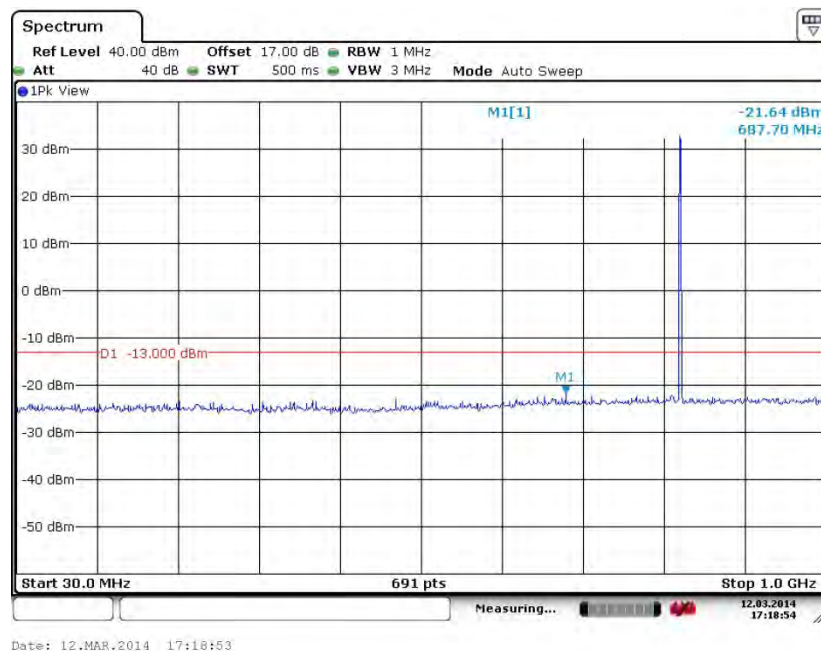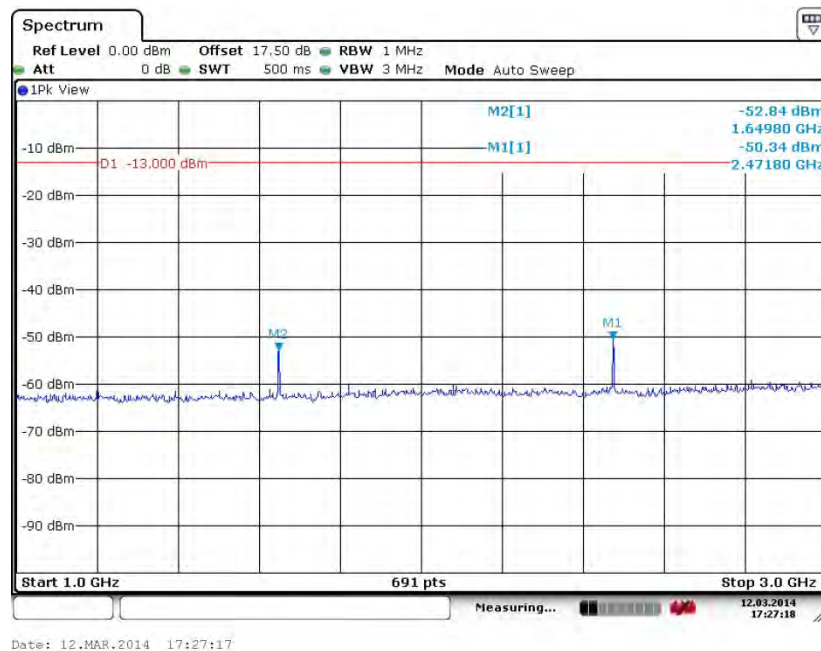
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

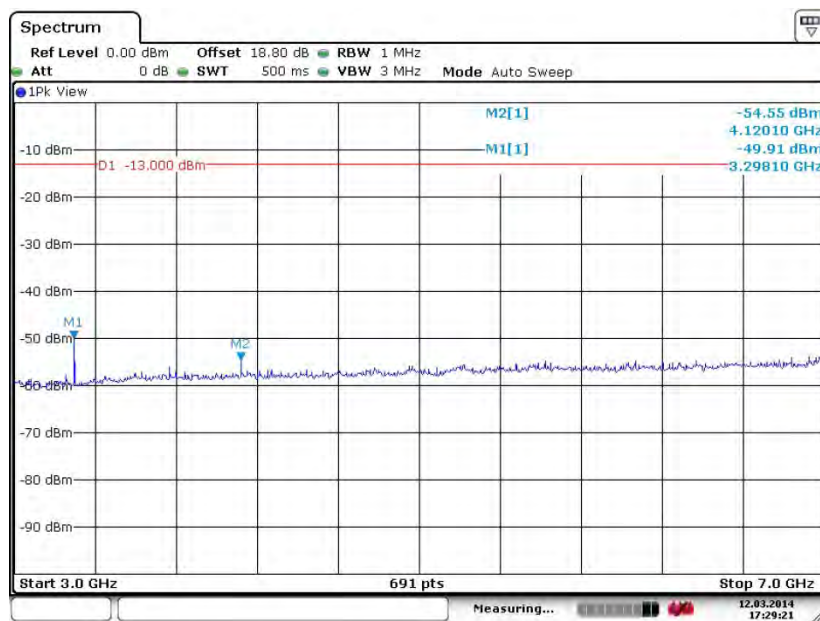
### Conducted Spurious Emission Plot between 3GHz ~ 7GHz




Date: 12.MAR.2014 17:29:21
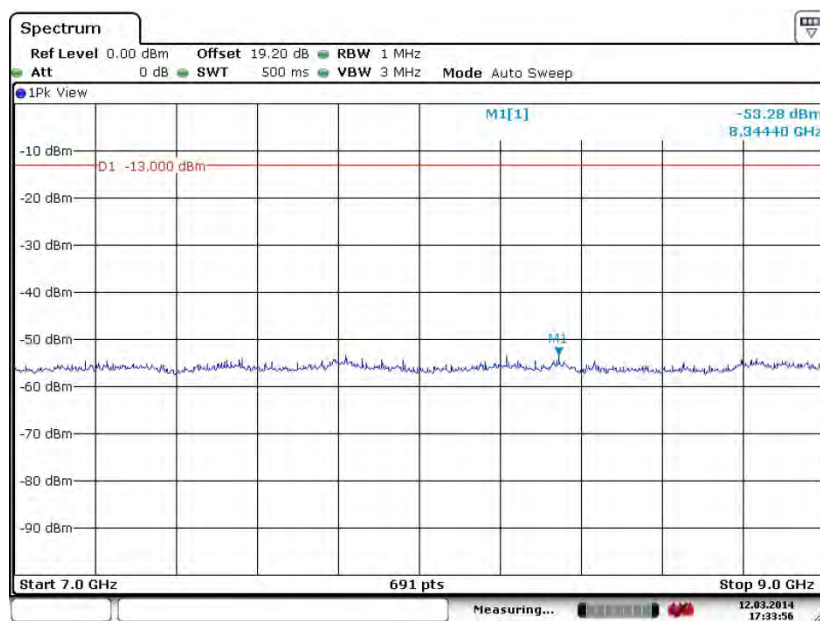
### Conducted Spurious Emission Plot between 7GHz ~ 9GHz




Date: 12.MAR.2014 17:33:56

|                    |                 |                    |           |
|--------------------|-----------------|--------------------|-----------|
| <b>Band :</b>      | GSM850          | <b>Channel :</b>   | CH189     |
| <b>Test Mode :</b> | GSM Link (GMSK) | <b>Frequency :</b> | 836.4 MHz |

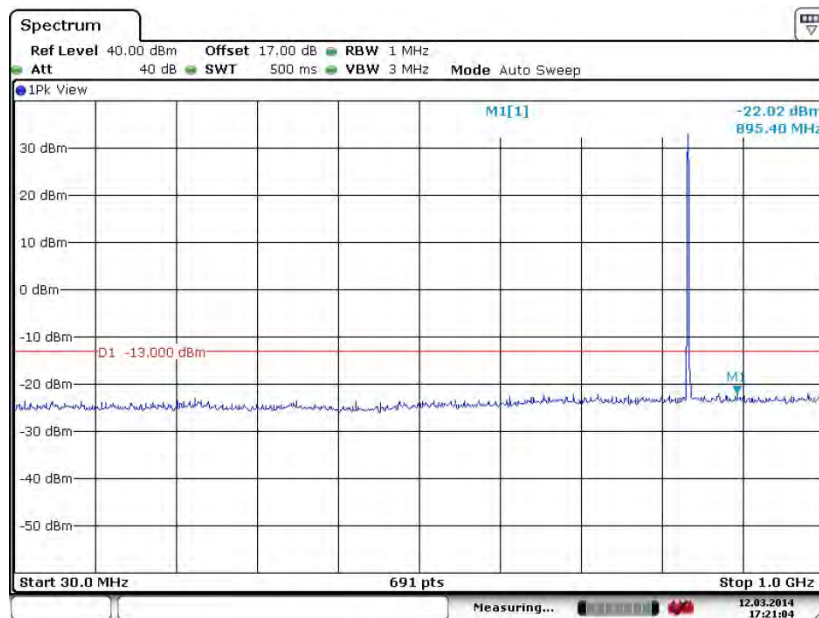
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 12.MAR.2014 17:21:05

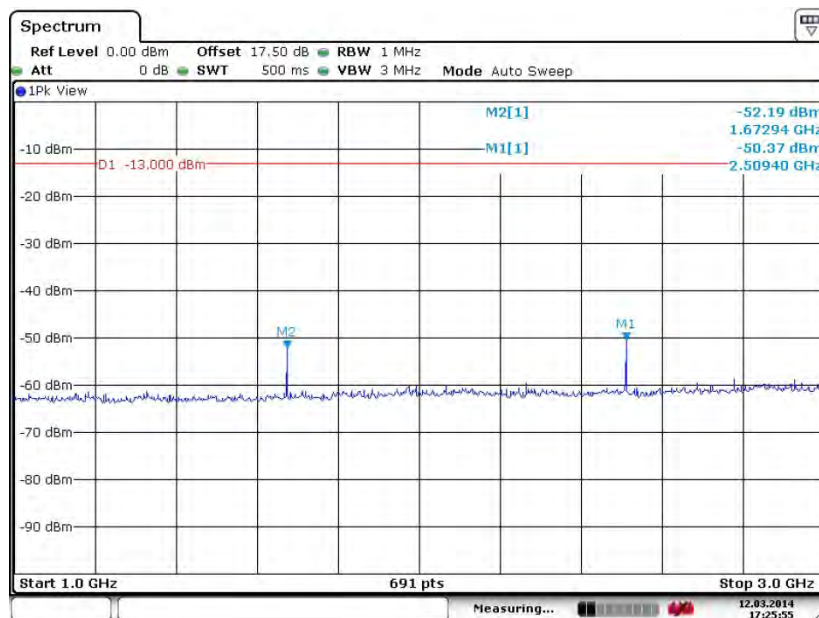**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


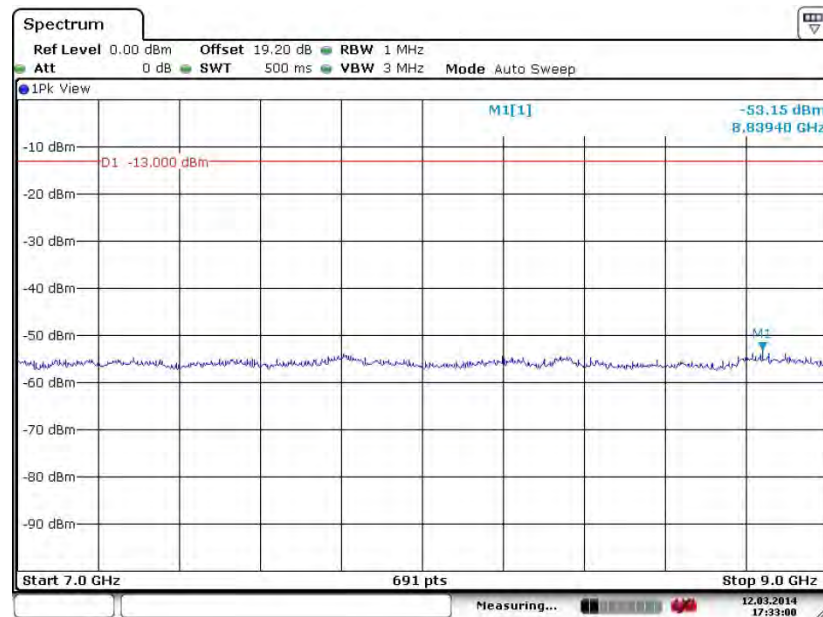
Date: 12.MAR.2014 17:25:54

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

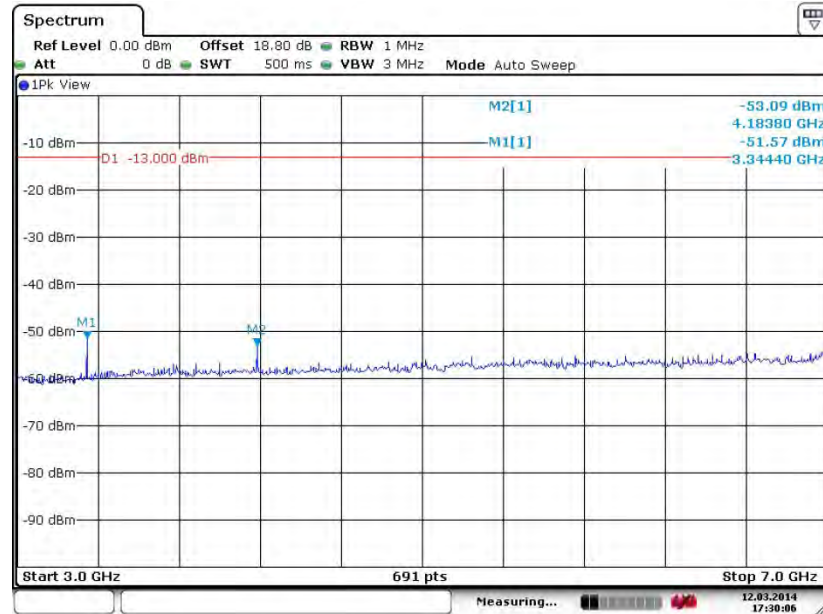

Date: 12.MAR.2014 17:30:06


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz



Date: 12.MAR.2014 17:32:59


|             |                 |             |           |
|-------------|-----------------|-------------|-----------|
| Band :      | GSM850          | Channel :   | CH251     |
| Test Mode : | GSM Link (GMSK) | Frequency : | 848.8 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

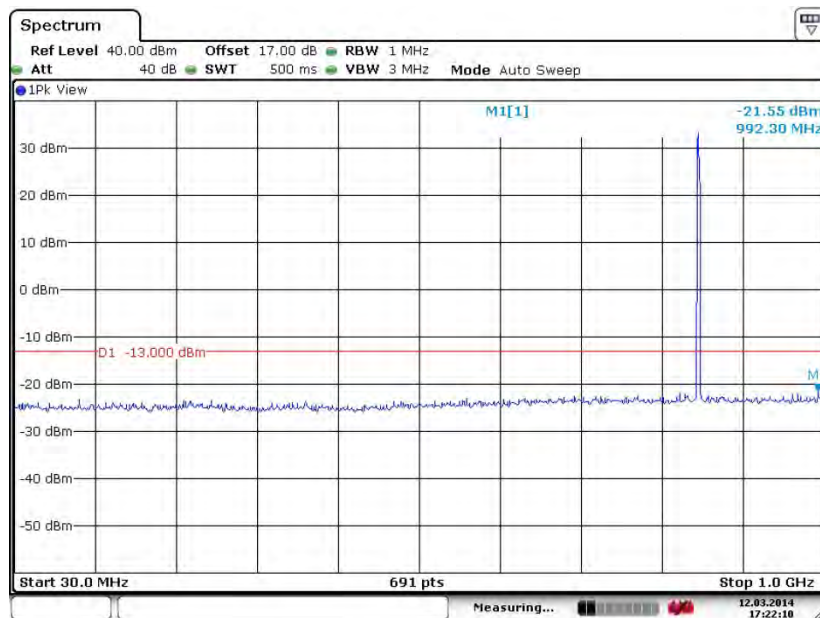

Date: 12.MAR.2014 17:22:11


## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

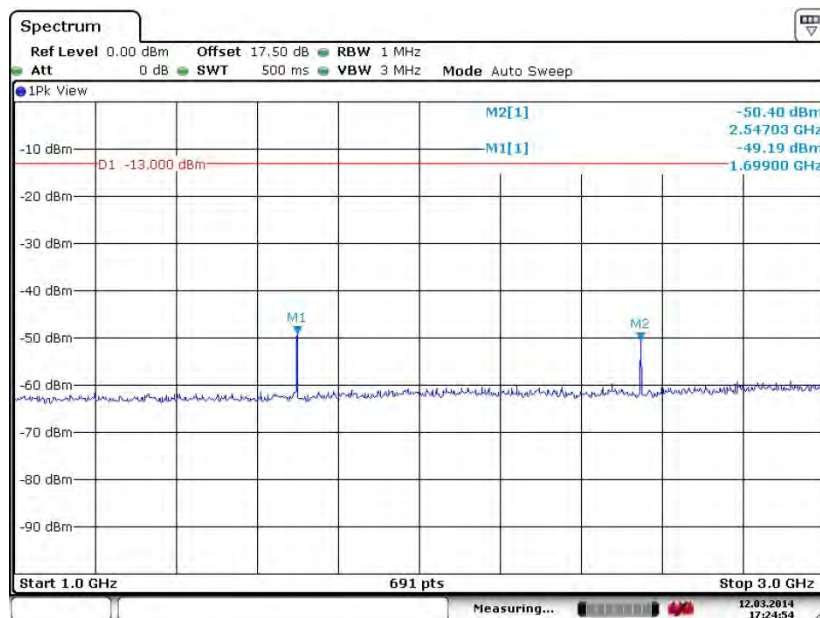

Date: 12.MAR.2014 17:24:54




Conducted Spurious Emission Plot between 3GHz ~ 7GHz

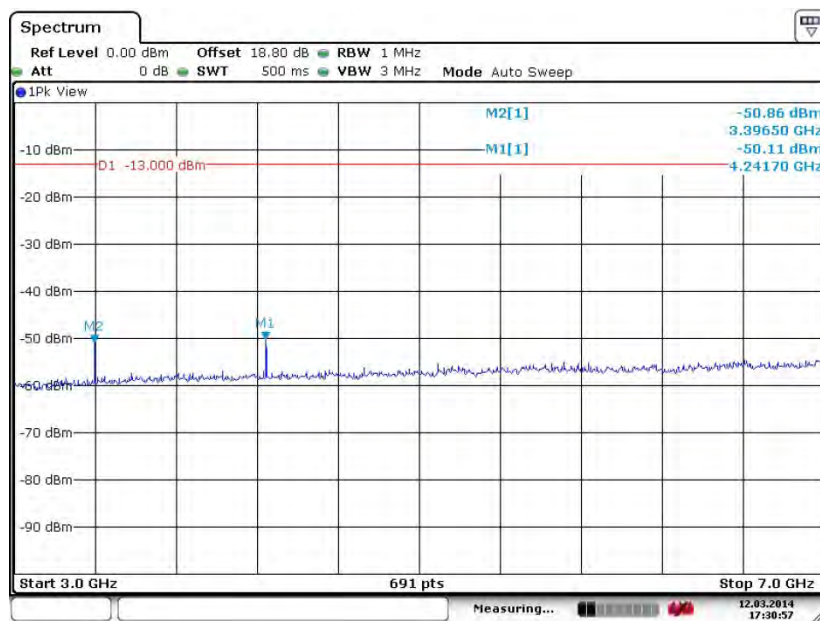

Date: 12.MAR.2014 17:30:56


Conducted Spurious Emission Plot between 7GHz ~ 9GHz

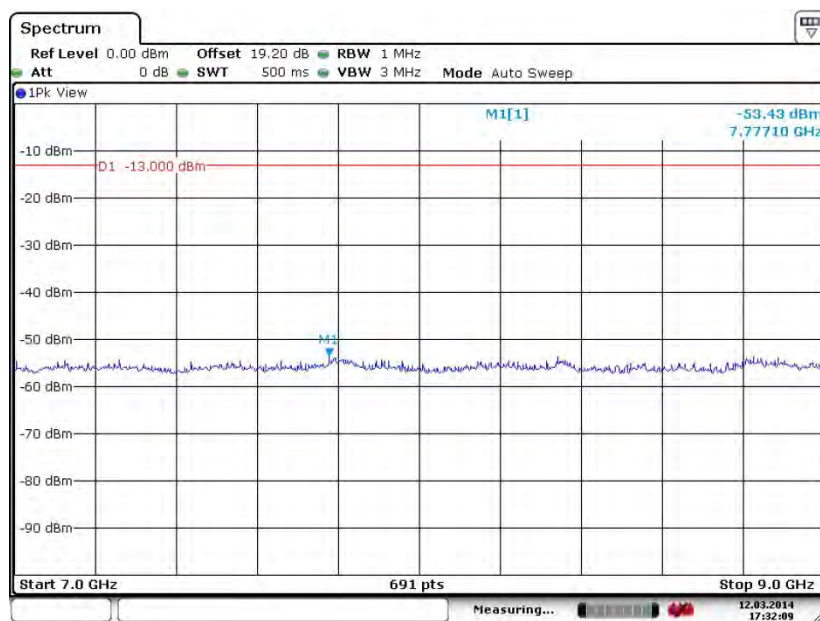

Date: 12.MAR.2014 17:32:08


|             |                          |             |           |
|-------------|--------------------------|-------------|-----------|
| Band :      | GSM850                   | Channel :   | CH128     |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 824.2 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

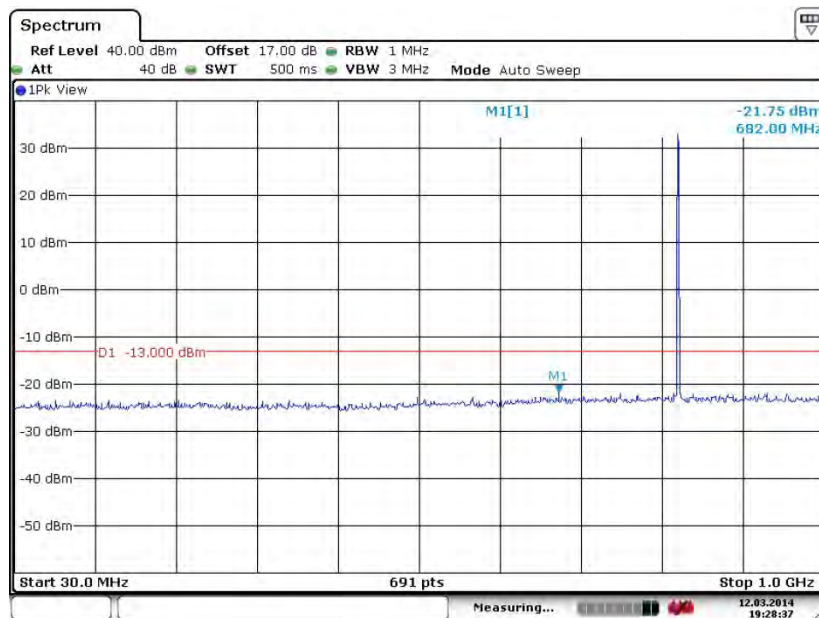


Date: 12.MAR.2014 19:28:36

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

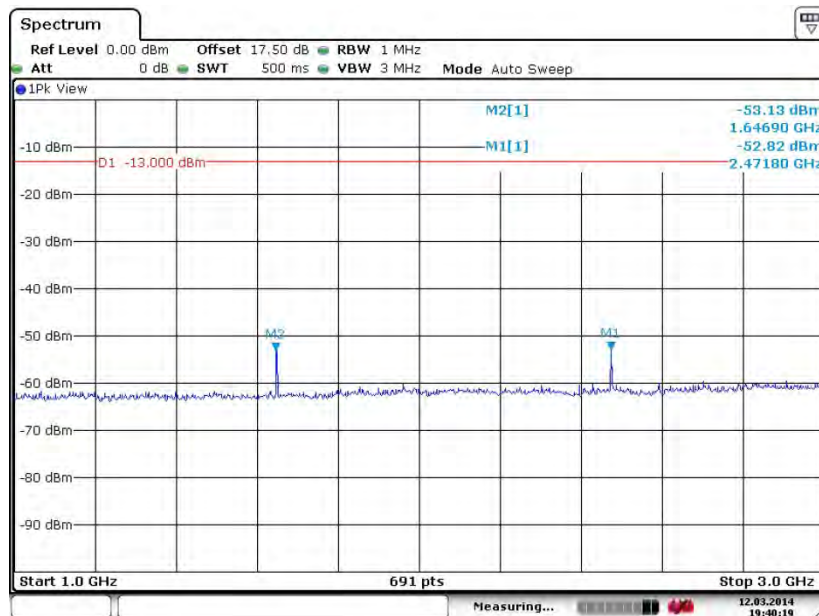


Date: 12.MAR.2014 19:40:18


## Conducted Spurious Emission Plot between 3GHz ~ 7GHz

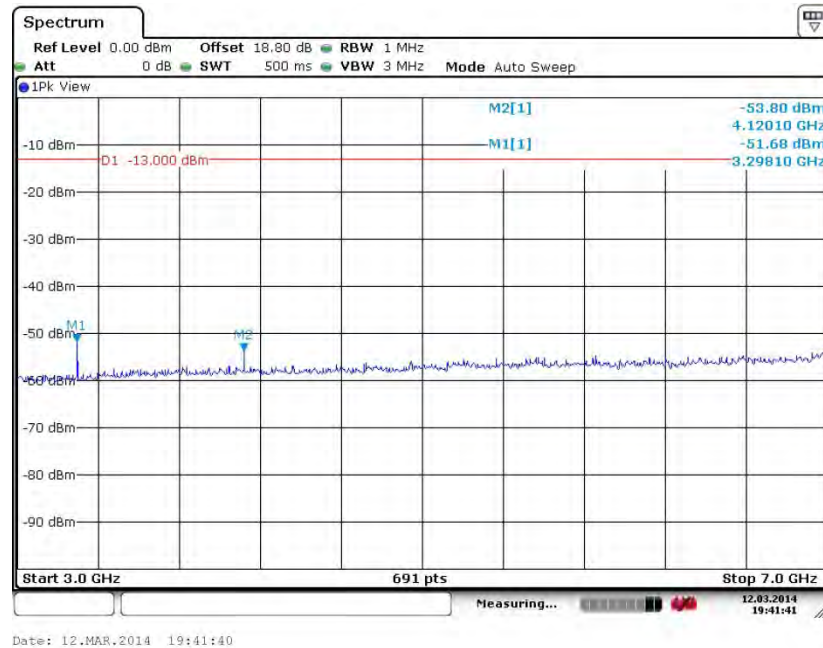


## Conducted Spurious Emission Plot between 7GHz ~ 9GHz

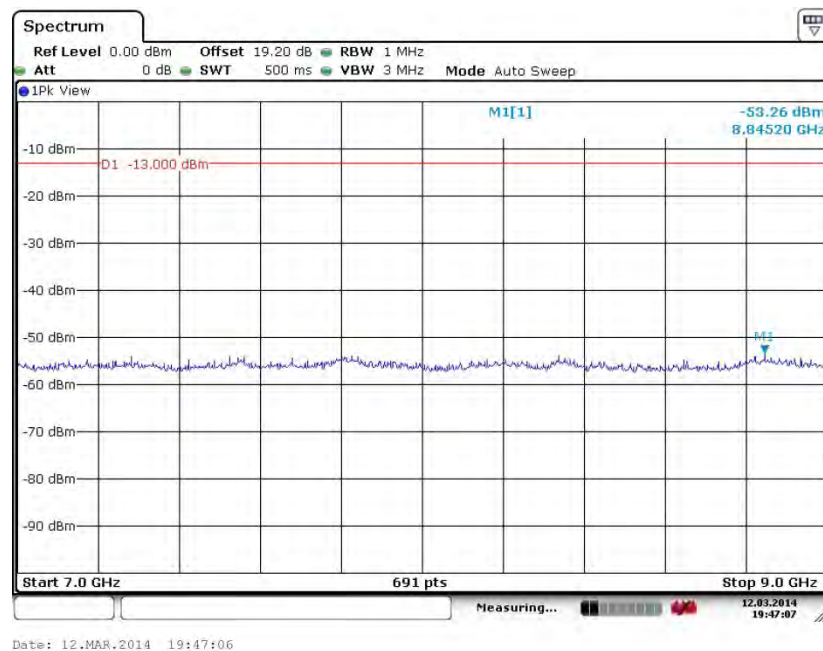

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH189     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 836.4 MHz |

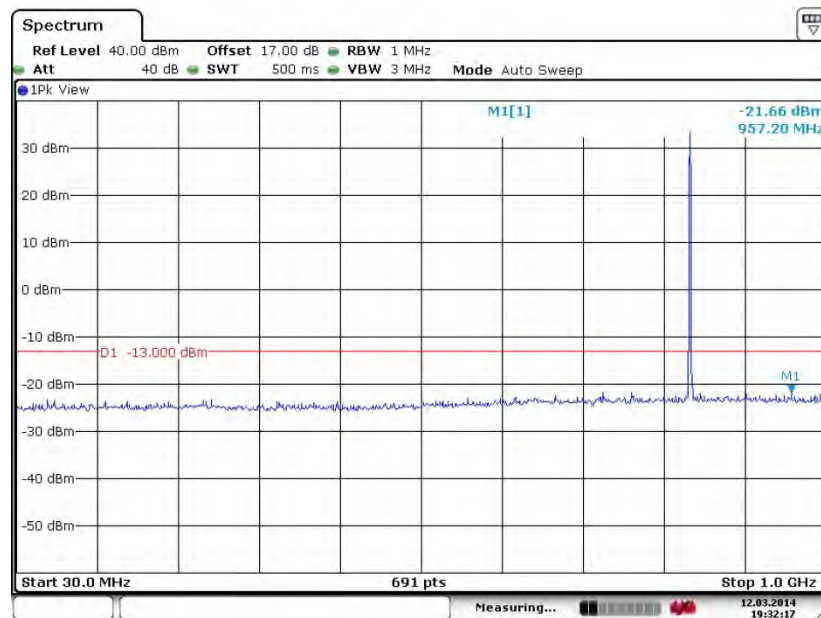
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 12.MAR.2014 19:32:17

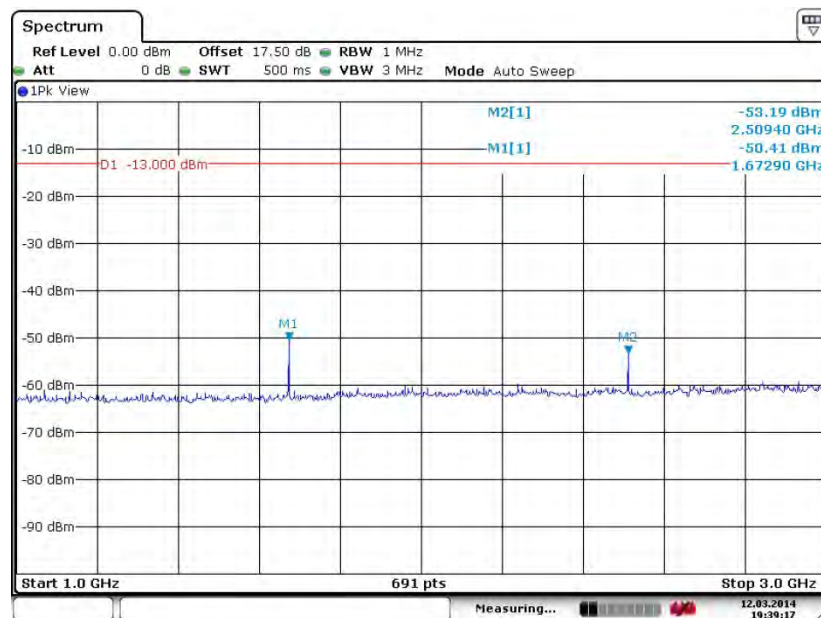
**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


Date: 12.MAR.2014 19:39:16



### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

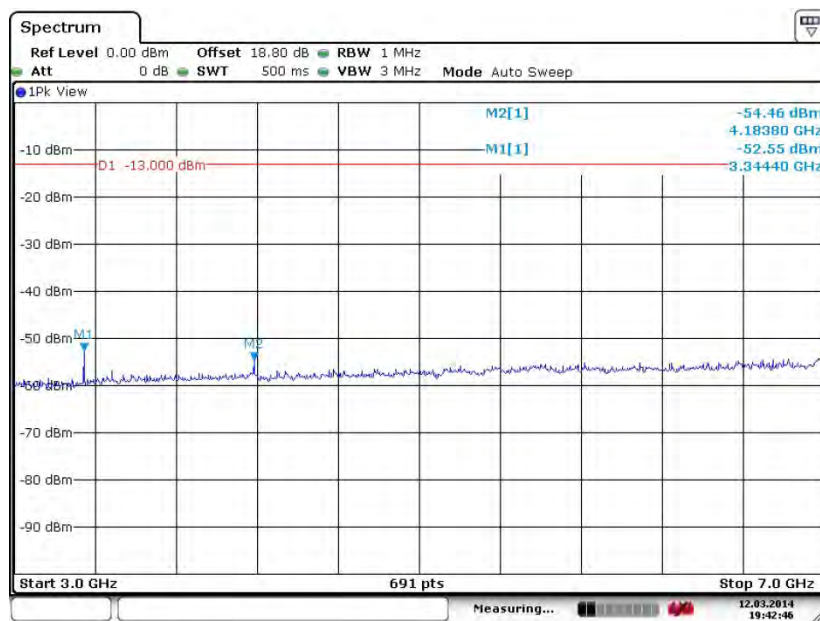


### Conducted Spurious Emission Plot between 7GHz ~ 9GHz

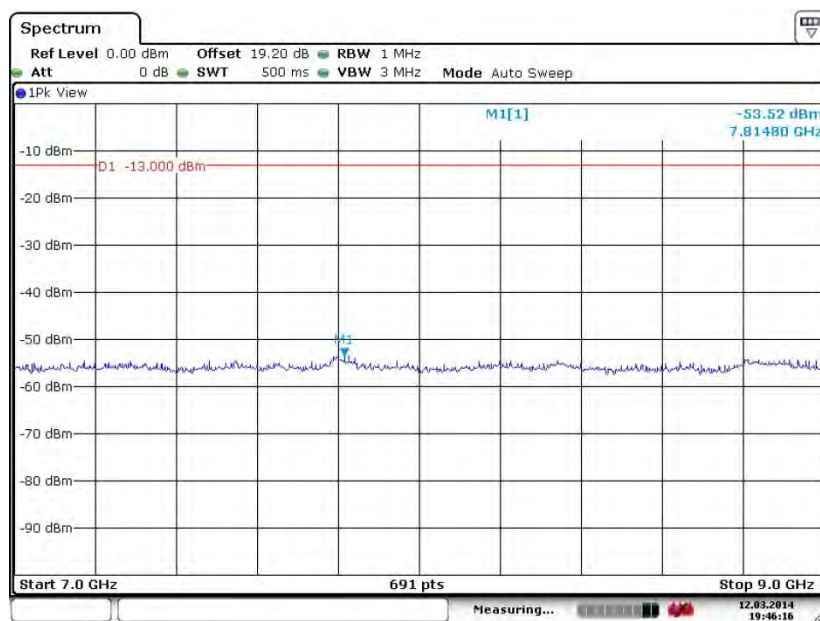

|                    |                          |                    |           |
|--------------------|--------------------------|--------------------|-----------|
| <b>Band :</b>      | GSM850                   | <b>Channel :</b>   | CH251     |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 848.8 MHz |

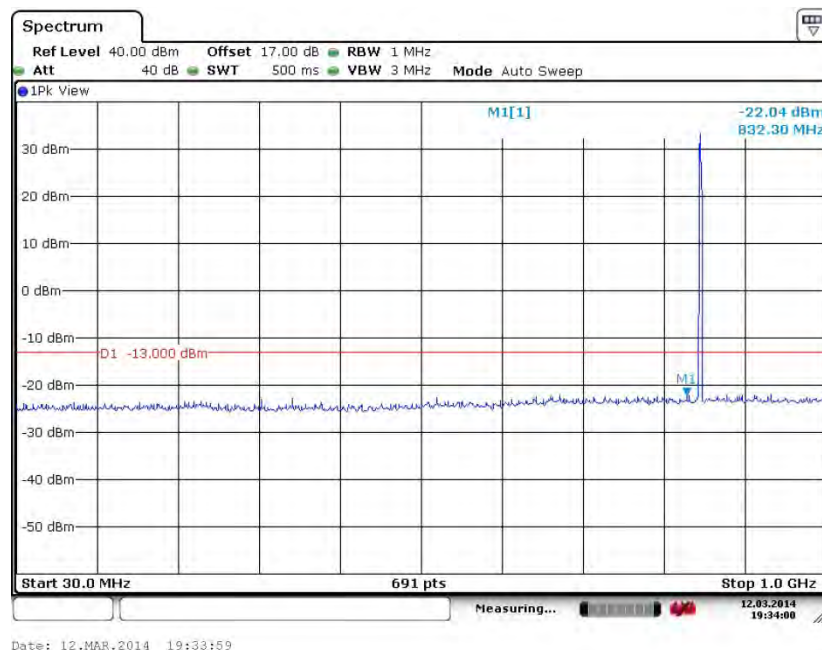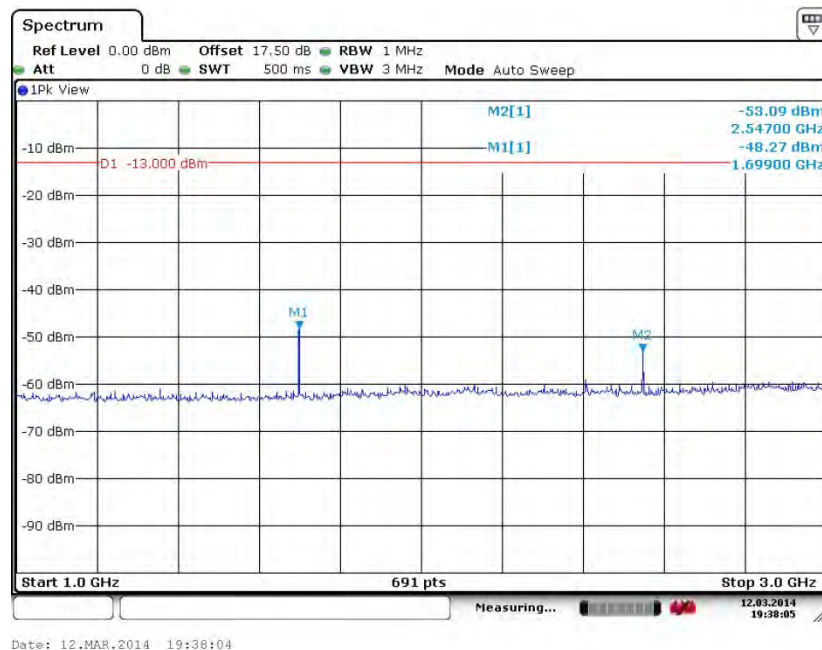
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**

**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**

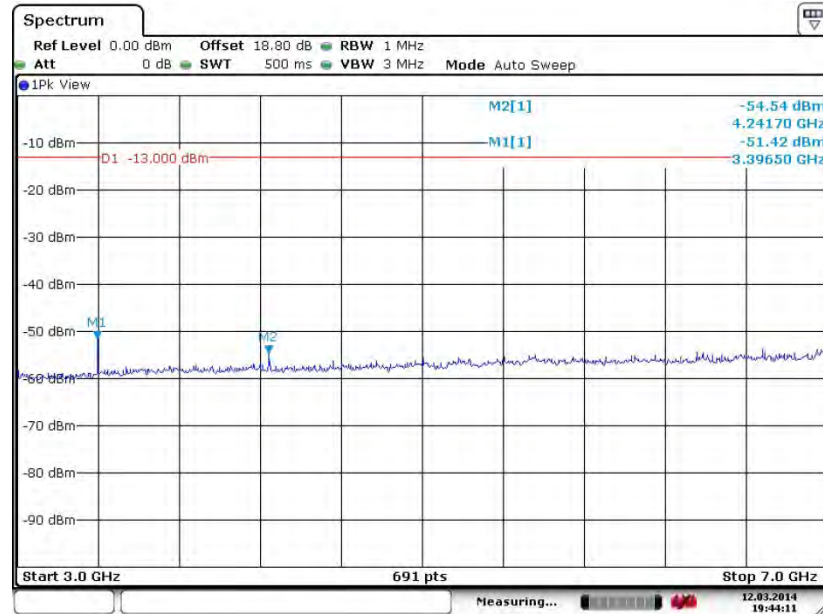
### Conducted Spurious Emission Plot between 3GHz ~ 7GHz



Date: 12.MAR.2014 19:44:10

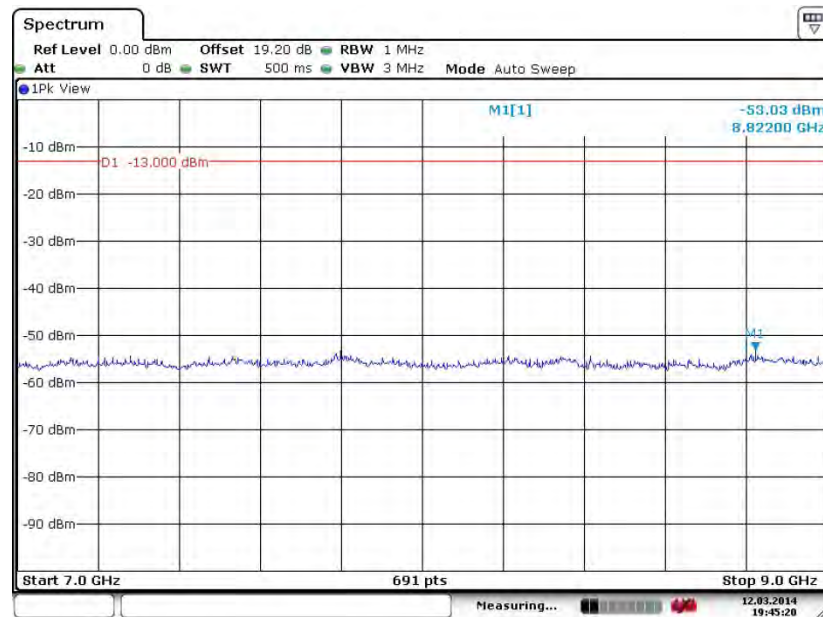
### Conducted Spurious Emission Plot between 7GHz ~ 9GHz



Date: 12.MAR.2014 19:45:19


|             |                 |             |            |
|-------------|-----------------|-------------|------------|
| Band :      | GSM1900         | Channel :   | CH512      |
| Test Mode : | GSM Link (GMSK) | Frequency : | 1850.2 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

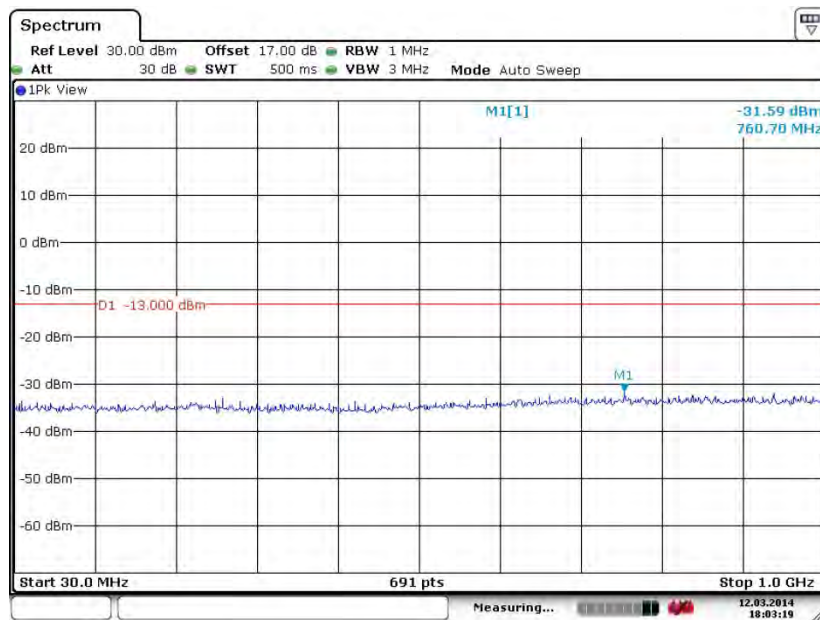

Date: 12.MAR.2014 18:03:19


## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

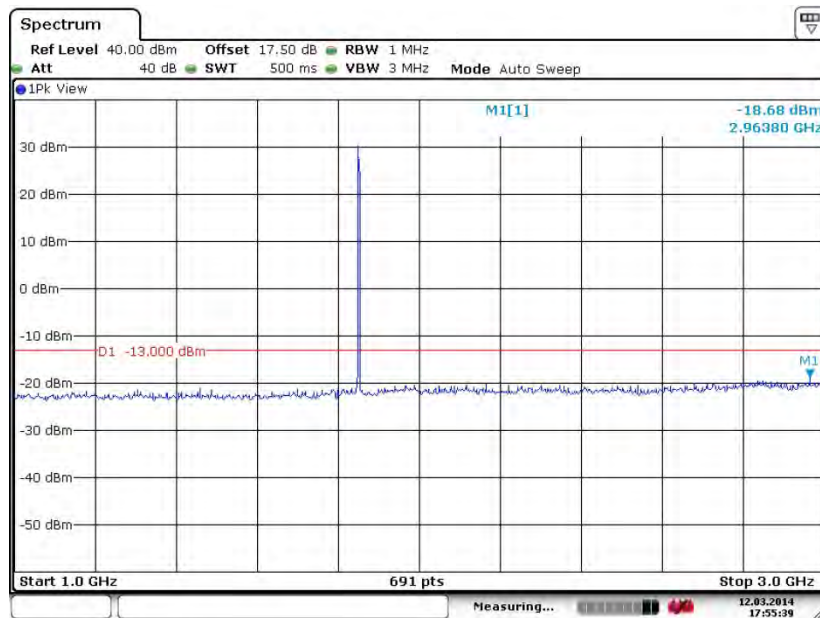

Date: 12.MAR.2014 17:55:40




### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

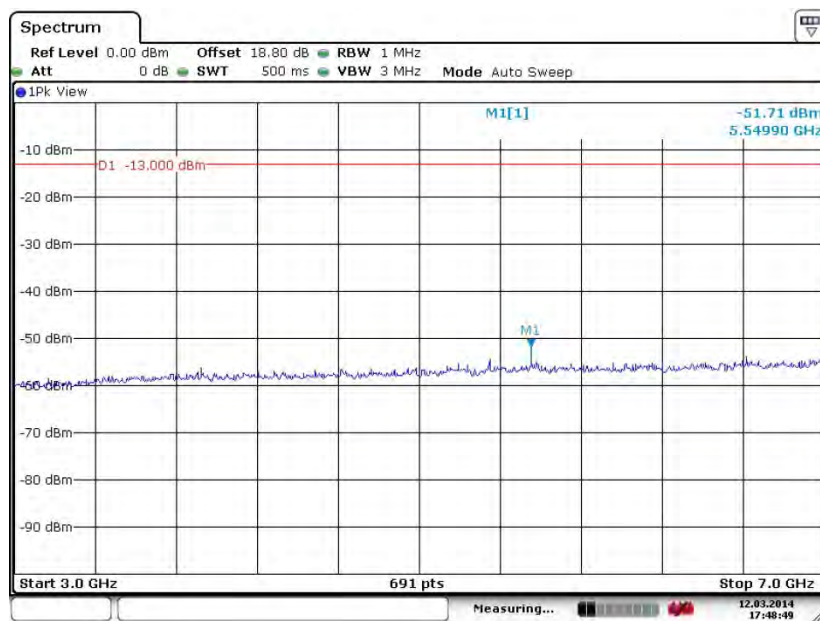

Date: 12.MAR.2014 17:48:50


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

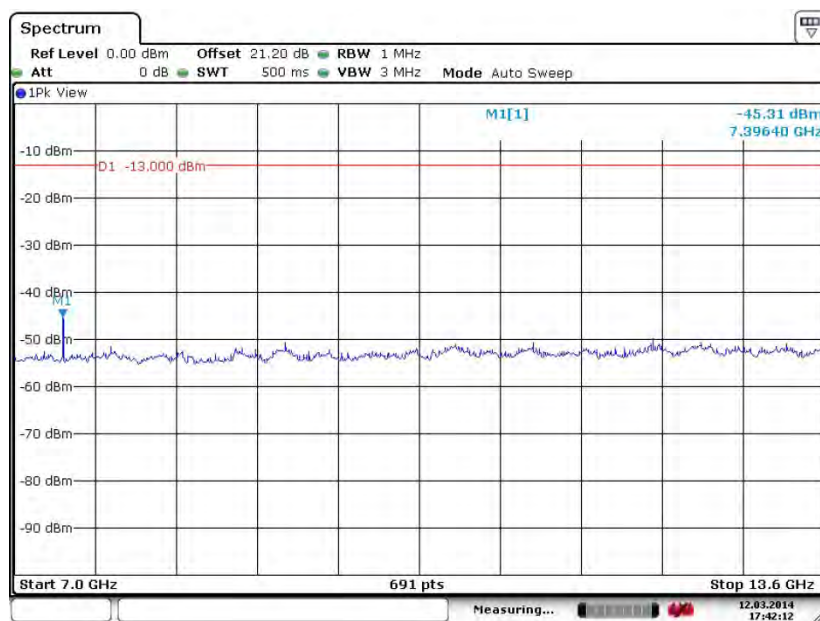

Date: 12.MAR.2014 17:42:13




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

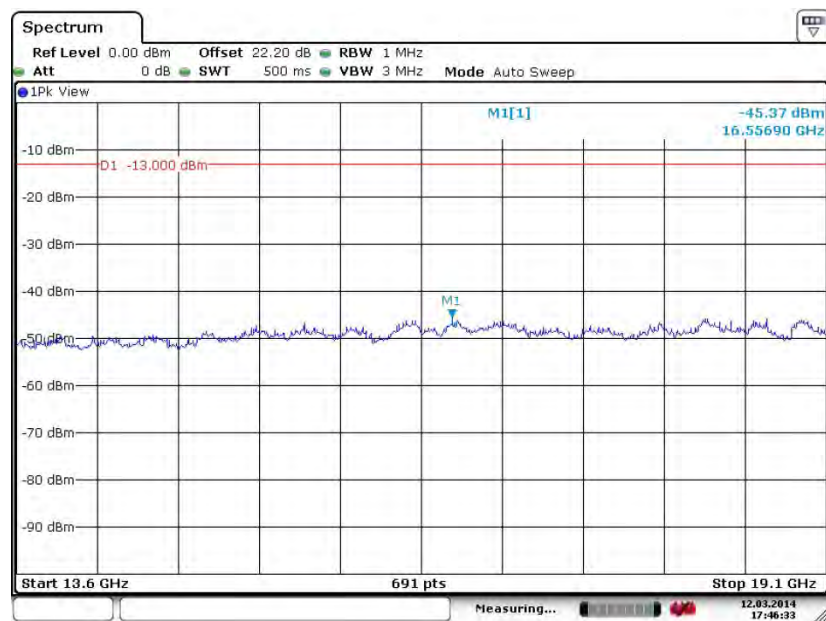

Date: 12.MAR.2014 17:46:34


|             |                 |             |            |
|-------------|-----------------|-------------|------------|
| Band :      | GSM1900         | Channel :   | CH661      |
| Test Mode : | GSM Link (GMSK) | Frequency : | 1880.0 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

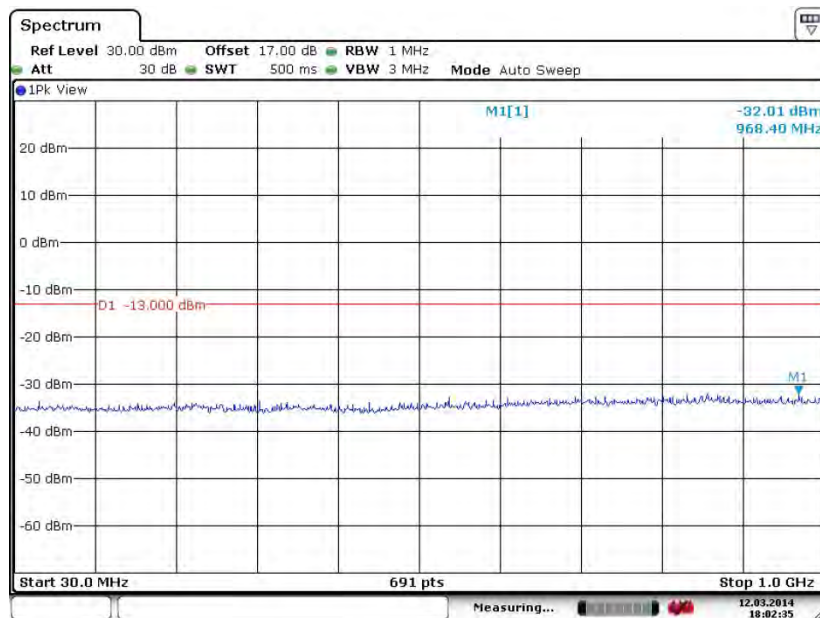


Date: 12.MAR.2014 18:02:34

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

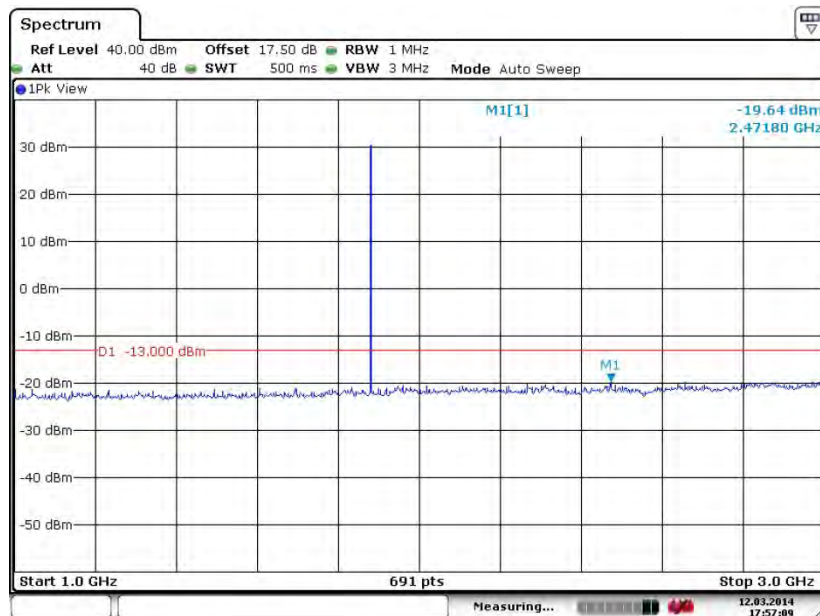


Date: 12.MAR.2014 17:57:08

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

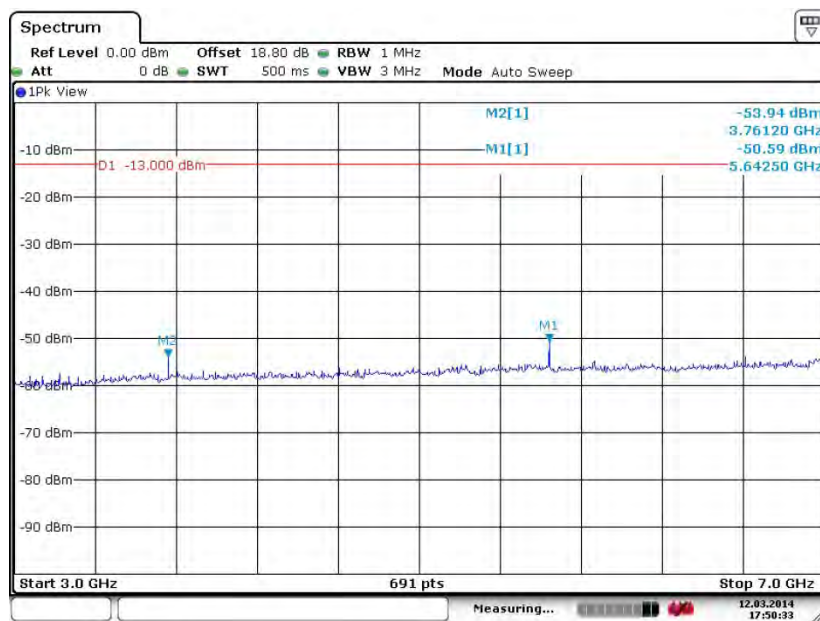

Date: 12.MAR.2014 17:50:32


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

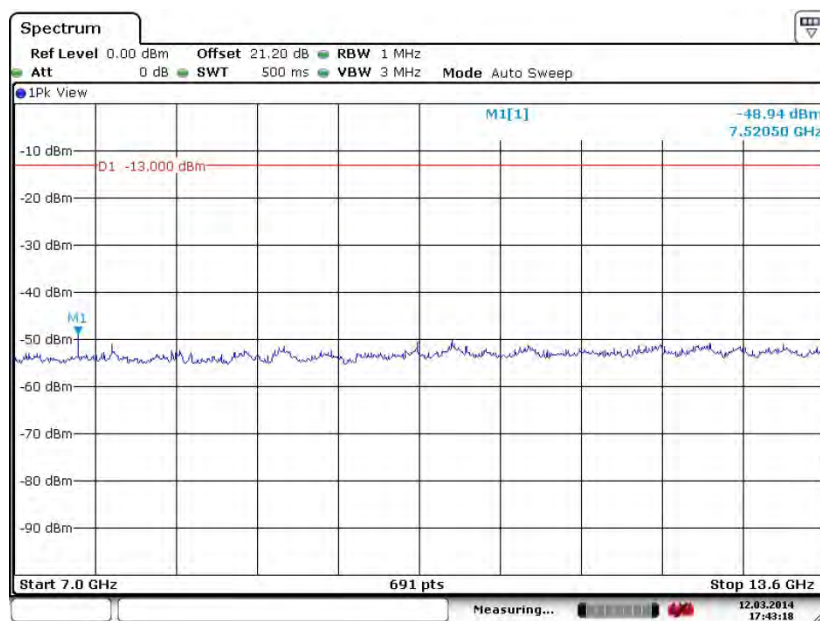

Date: 12.MAR.2014 17:43:19




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

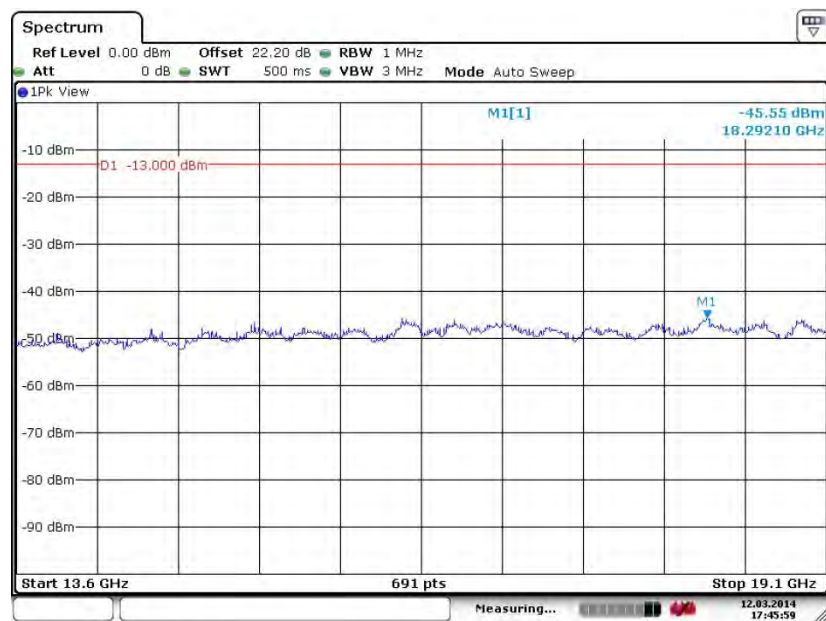

Date: 12.MAR.2014 17:45:59


|             |                 |             |            |
|-------------|-----------------|-------------|------------|
| Band :      | GSM1900         | Channel :   | CH810      |
| Test Mode : | GSM Link (GMSK) | Frequency : | 1909.8 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

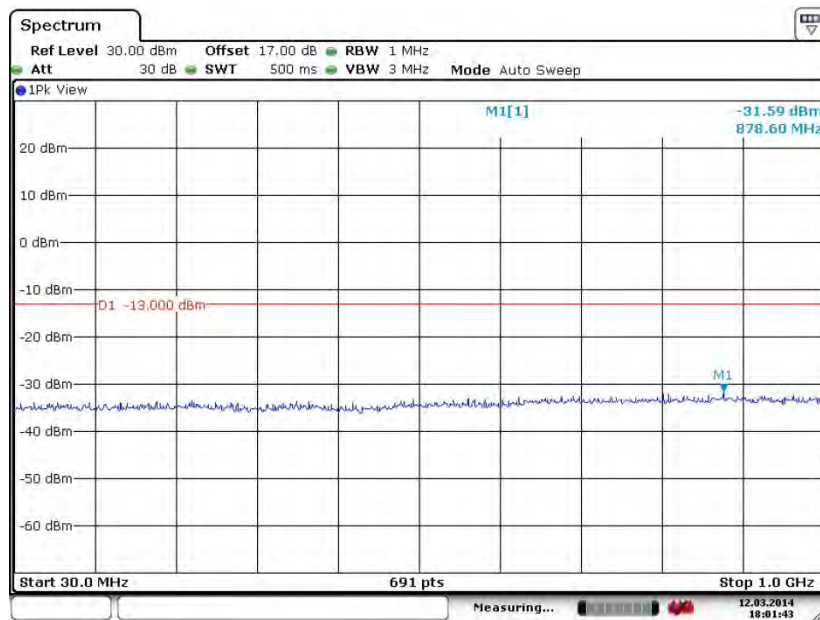


Date: 12.MAR.2014 18:01:43

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

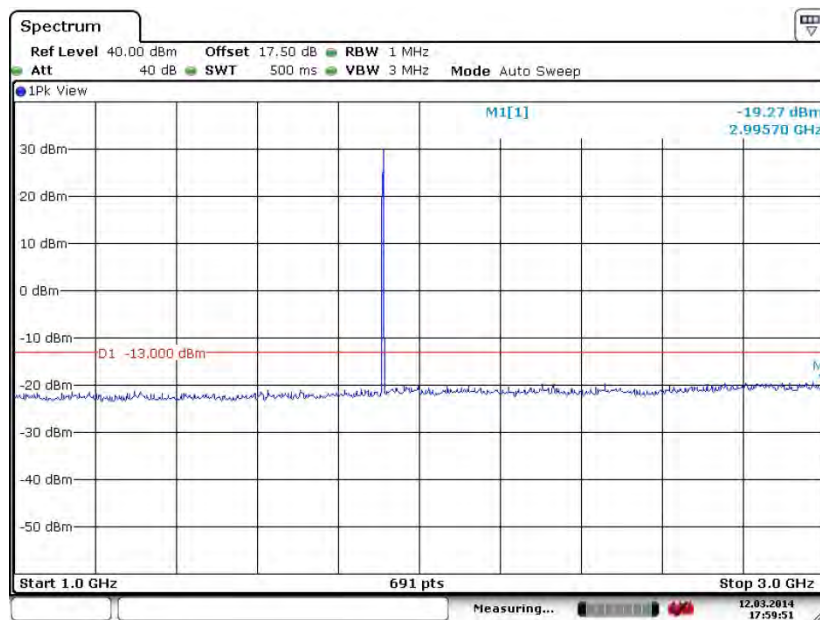


Date: 12.MAR.2014 17:59:51

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

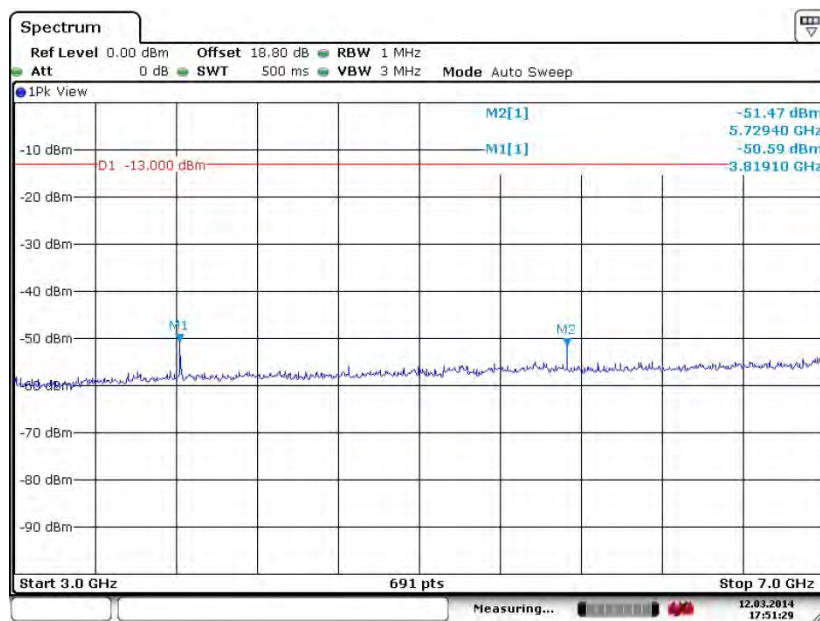

Date: 12.MAR.2014 17:51:29


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

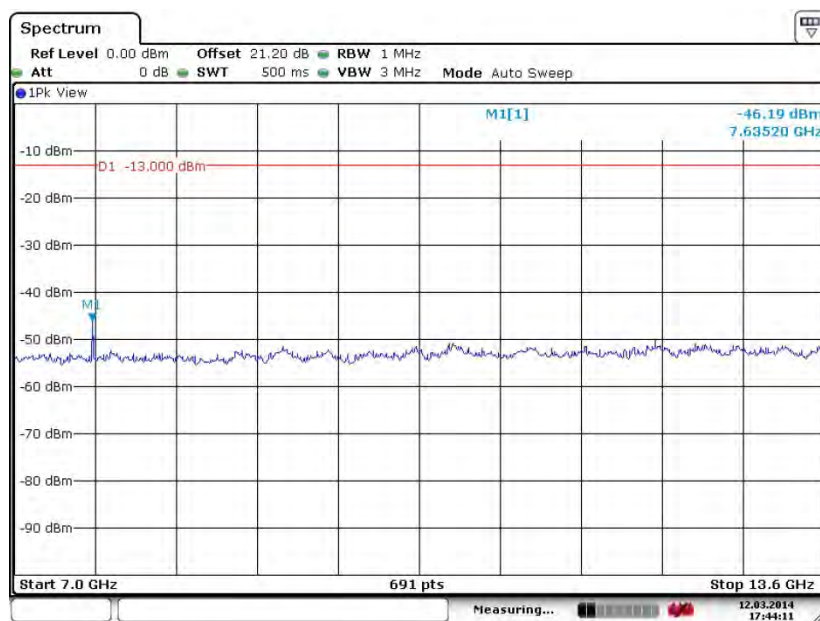

Date: 12.MAR.2014 17:44:11




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

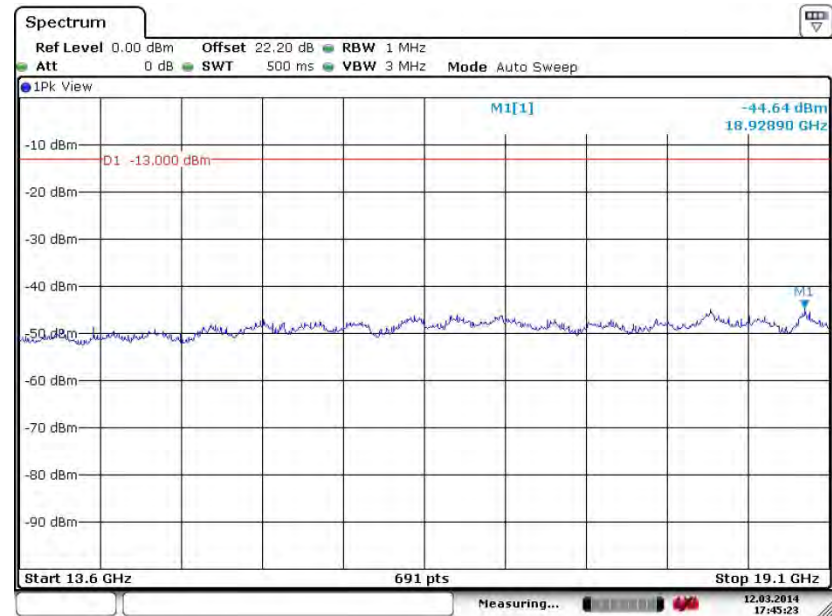

Date: 12.MAR.2014 17:45:23


|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH512      |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 1850.2 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

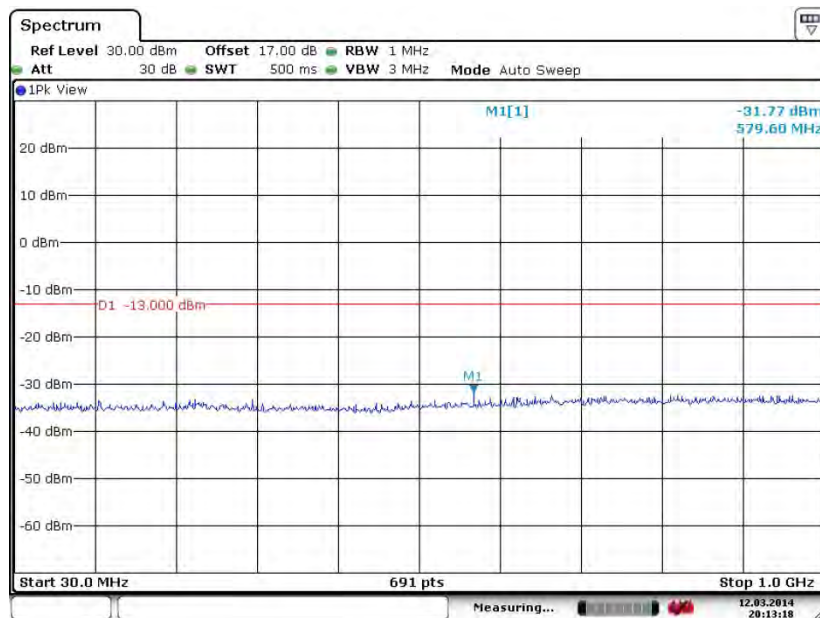


Date: 12.MAR.2014 20:13:18

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

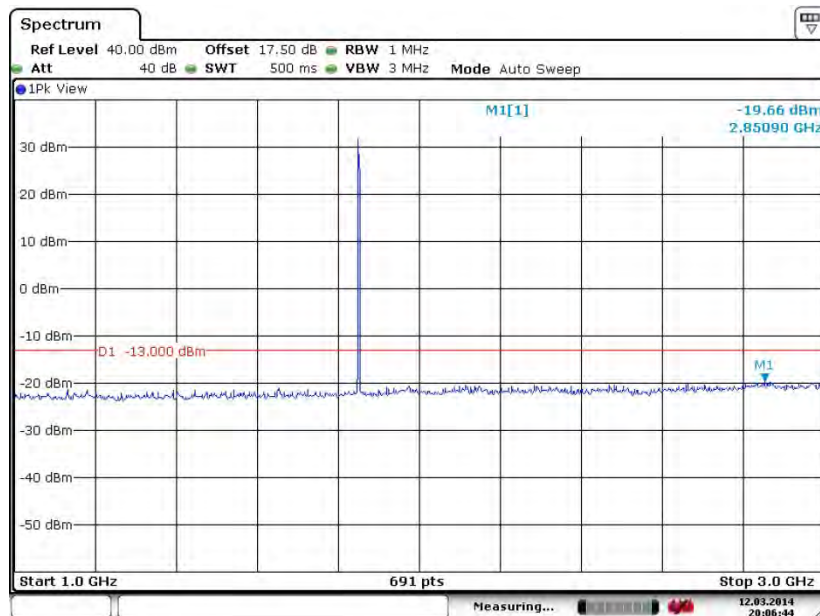


Date: 12.MAR.2014 20:06:43

## Conducted Spurious Emission Plot between 3GHz ~ 7GHz

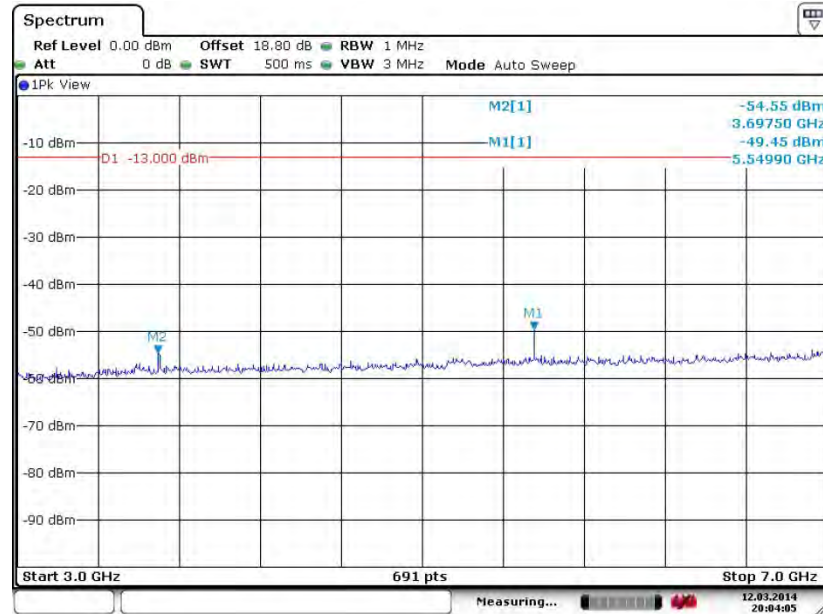


## Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

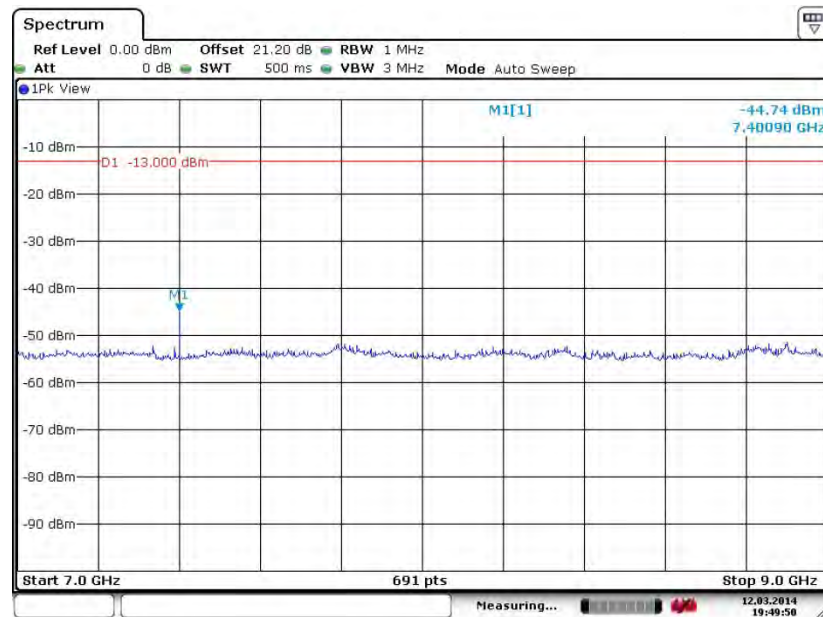




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

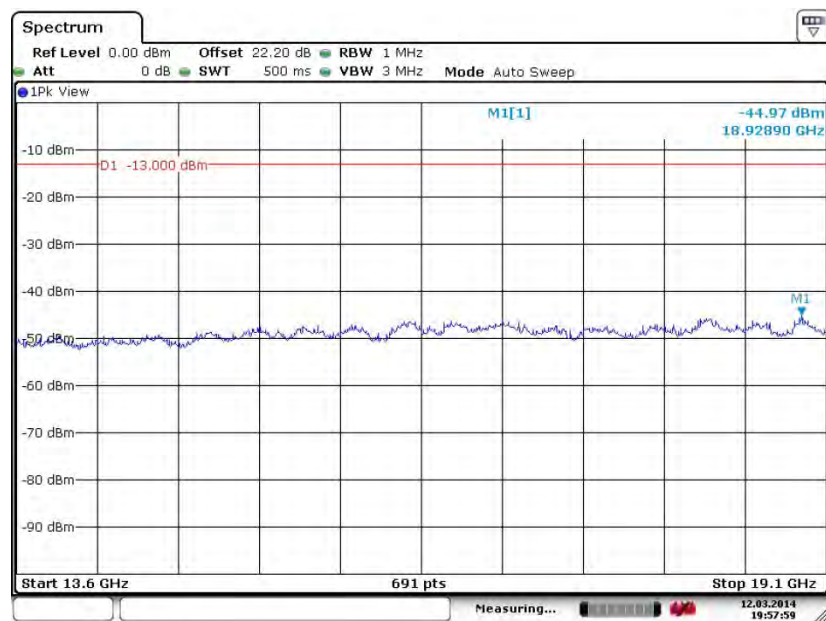


Date: 12.MAR.2014 19:57:59

|                    |                          |                    |            |
|--------------------|--------------------------|--------------------|------------|
| <b>Band :</b>      | GSM1900                  | <b>Channel :</b>   | CH661      |
| <b>Test Mode :</b> | EDGE class 8 Link (8PSK) | <b>Frequency :</b> | 1880.0 MHz |

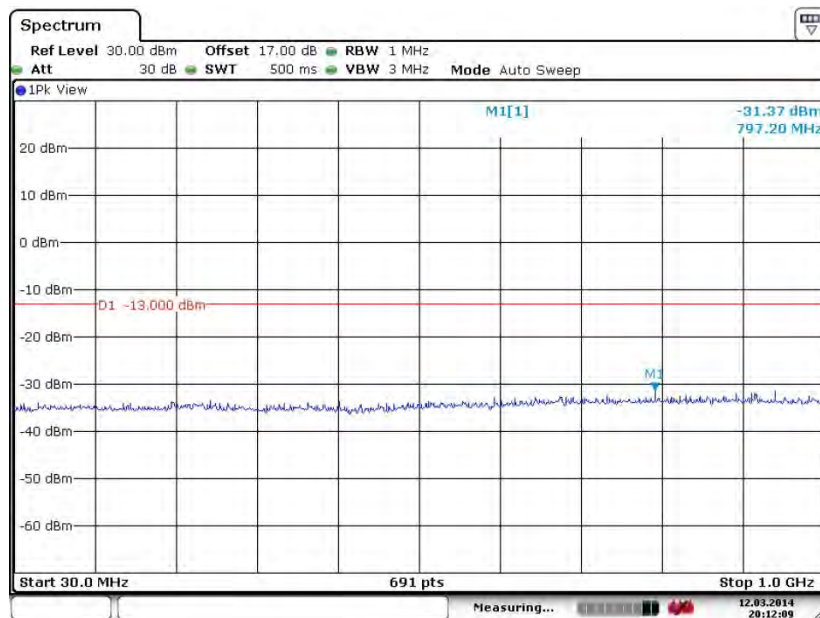
**Conducted Spurious Emission Plot between 30MHz ~ 1GHz**


Date: 12.MAR.2014 20:12:09

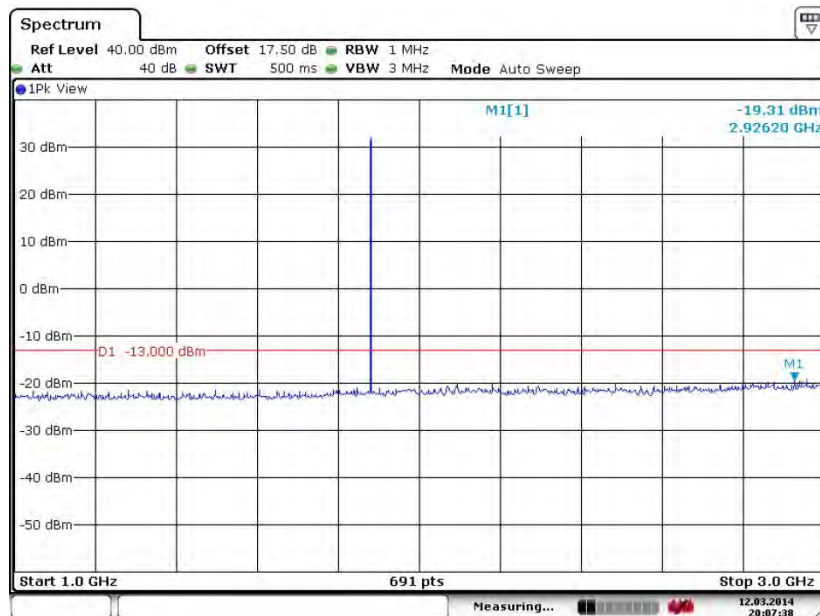**Conducted Spurious Emission Plot between 1GHz ~ 3GHz**


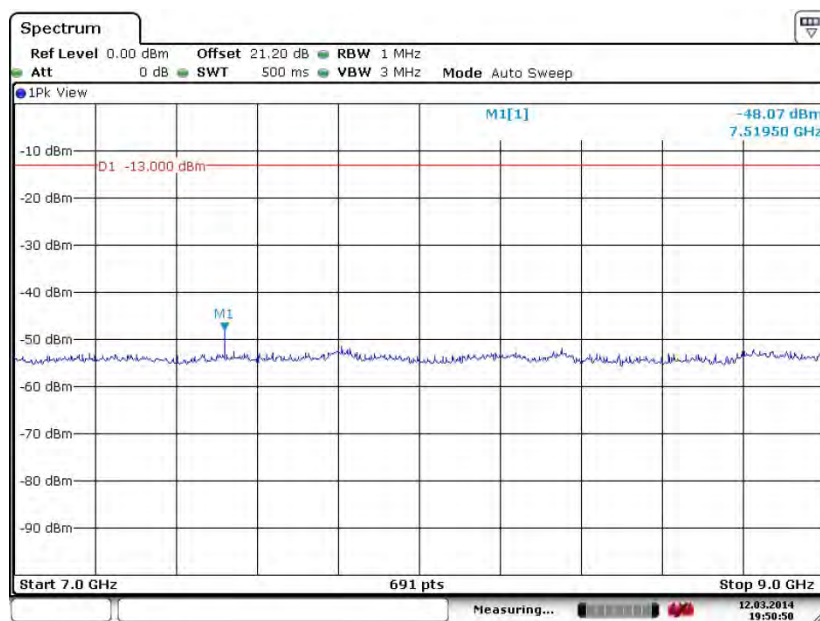
Date: 12.MAR.2014 20:07:37

## Conducted Spurious Emission Plot between 3GHz ~ 7GHz

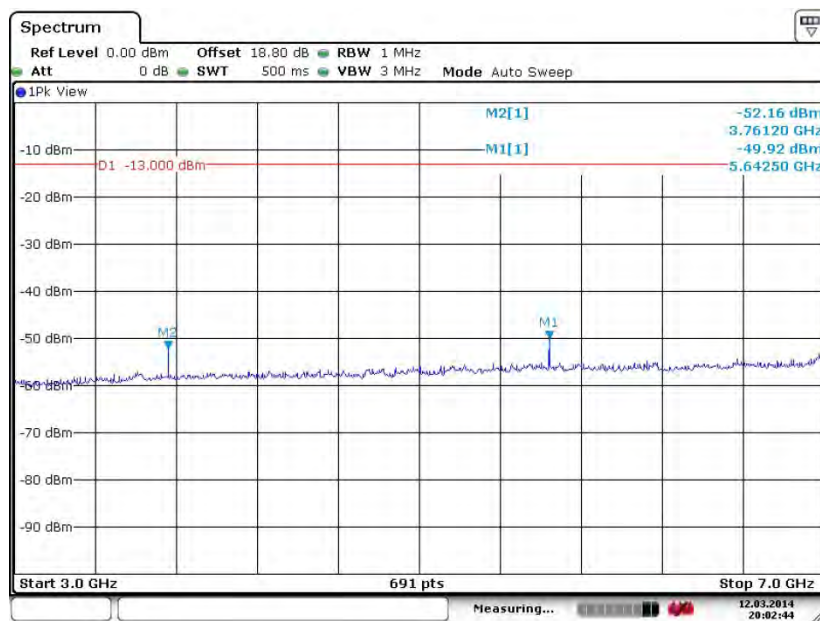

Date: 12.MAR.2014 20:02:43


## Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz



Date: 12.MAR.2014 19:50:49




Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

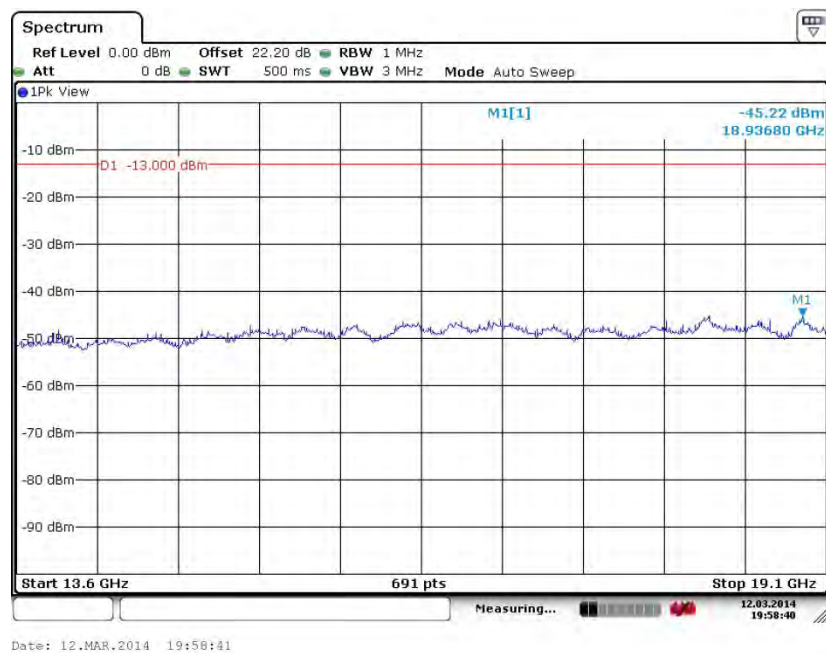


|             |                          |             |            |
|-------------|--------------------------|-------------|------------|
| Band :      | GSM1900                  | Channel :   | CH810      |
| Test Mode : | EDGE class 8 Link (8PSK) | Frequency : | 1909.8 MHz |

## Conducted Spurious Emission Plot between 30MHz ~ 1GHz

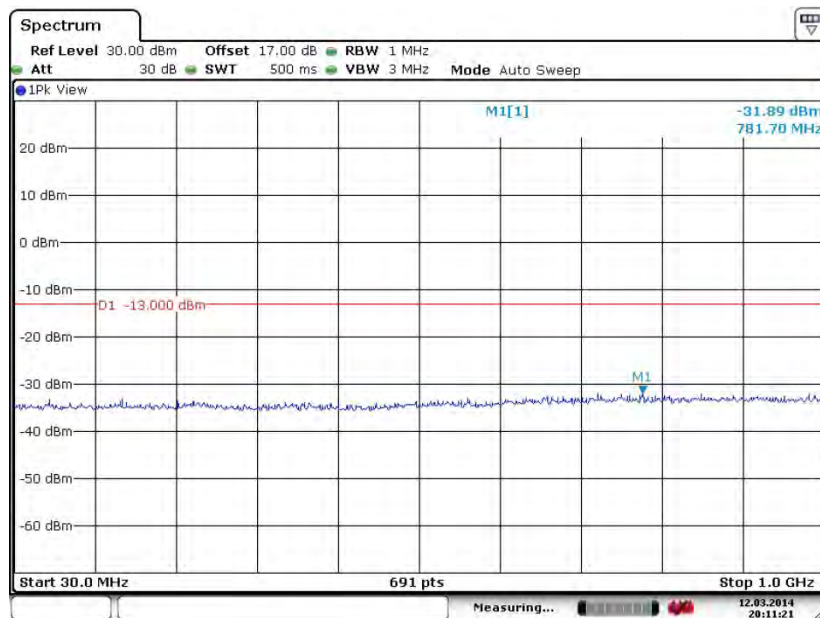


Date: 12.MAR.2014 20:11:20

## Conducted Spurious Emission Plot between 1GHz ~ 3GHz

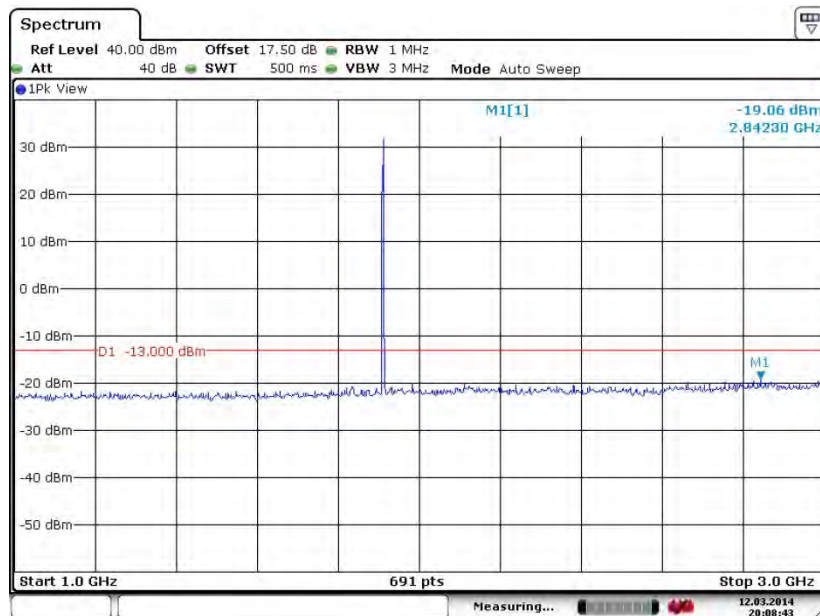


Date: 12.MAR.2014 20:08:42

### Conducted Spurious Emission Plot between 3GHz ~ 7GHz

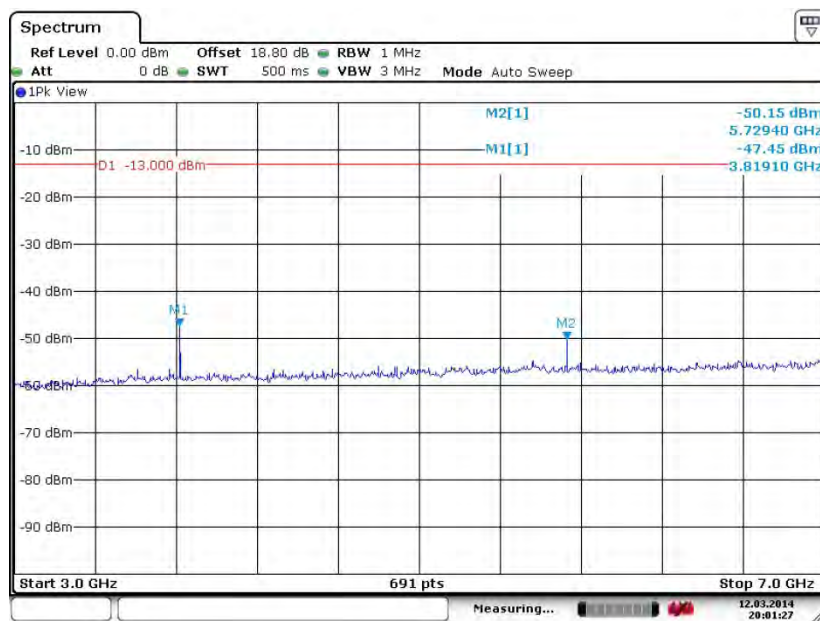

Date: 12.MAR.2014 20:01:27


### Conducted Spurious Emission Plot between 7GHz ~ 13.6GHz

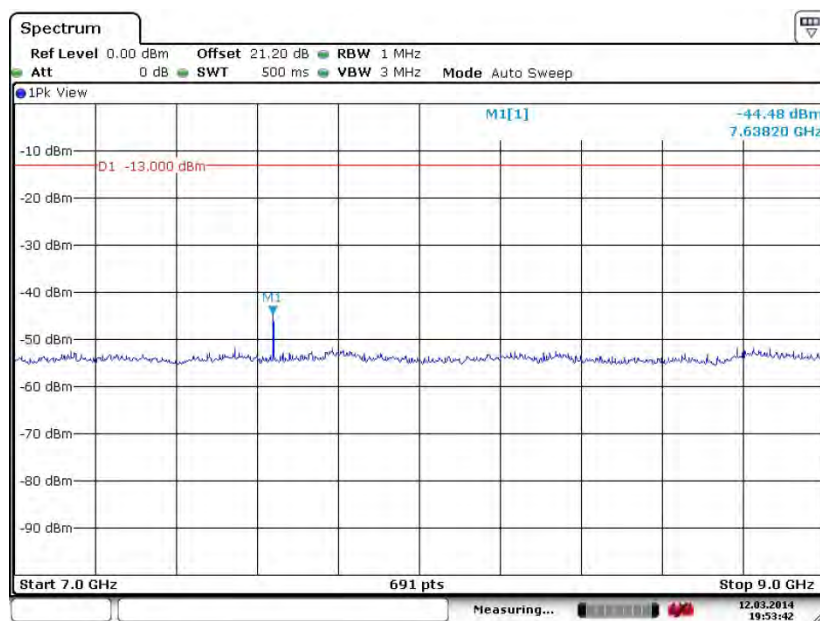

Date: 12.MAR.2014 19:53:42



Conducted Spurious Emission Plot between 13.6GHz ~ 19.1GHz

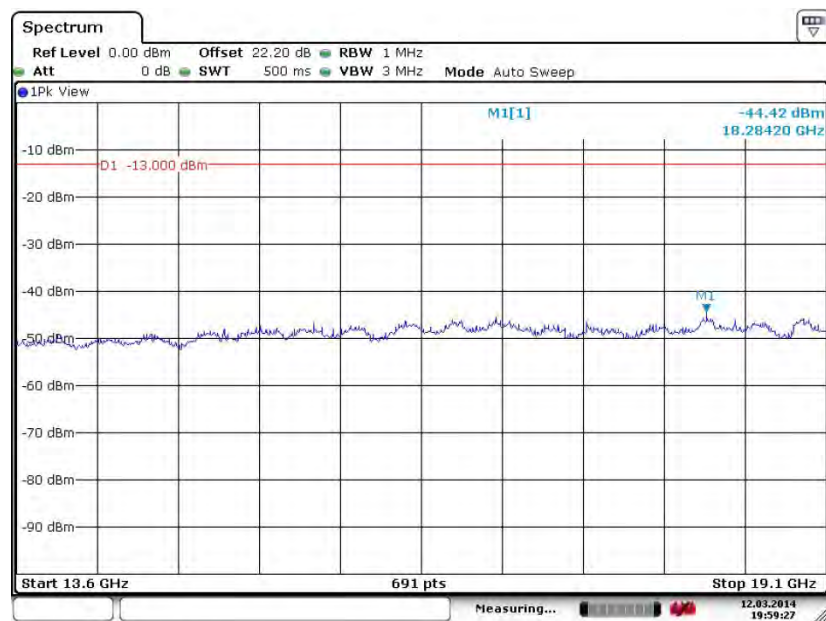

Date: 12.MAR.2014 19:59:26

### 3.7 Field Strength of Spurious Radiation Measurement

#### 3.7.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

#### 3.7.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

#### 3.7.3 Test Procedures


1. The EUT was placed on a rotatable wooden table 0.8 meters above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$

### 3.7.4 Test Setup

For radiated emissions from 30MHz to 1GHz

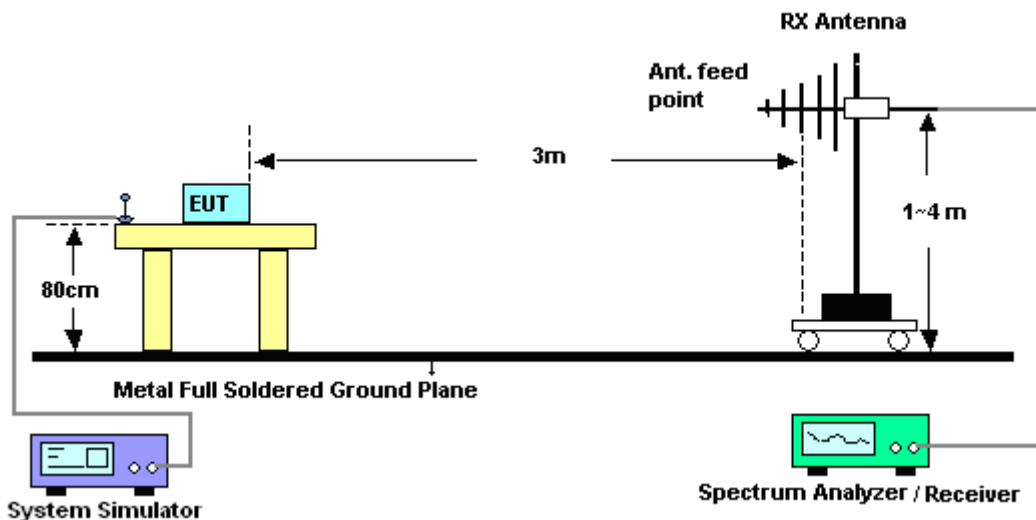


For radiated emissions above 1GHz

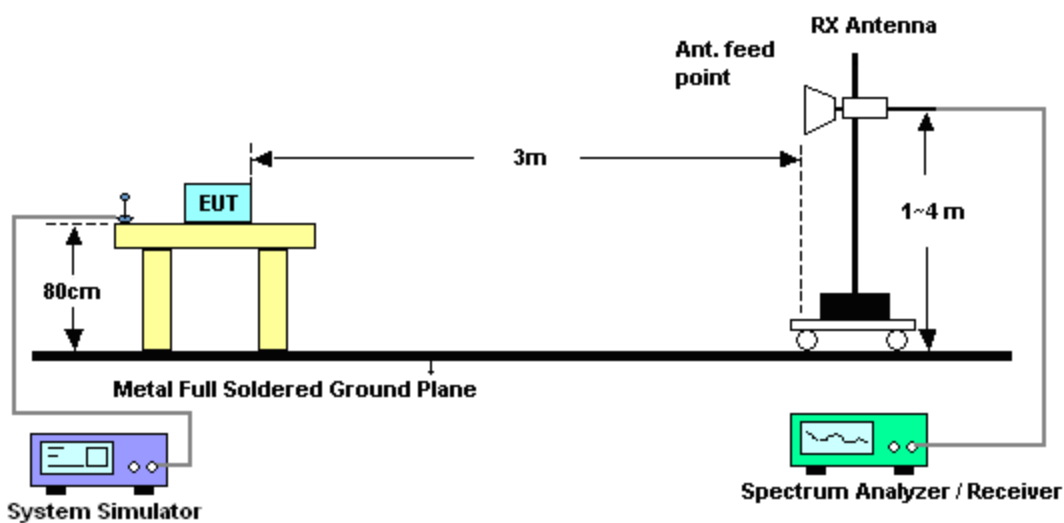


**3.7.5 Test Result of Field Strength of Spurious Radiated**

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH128                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

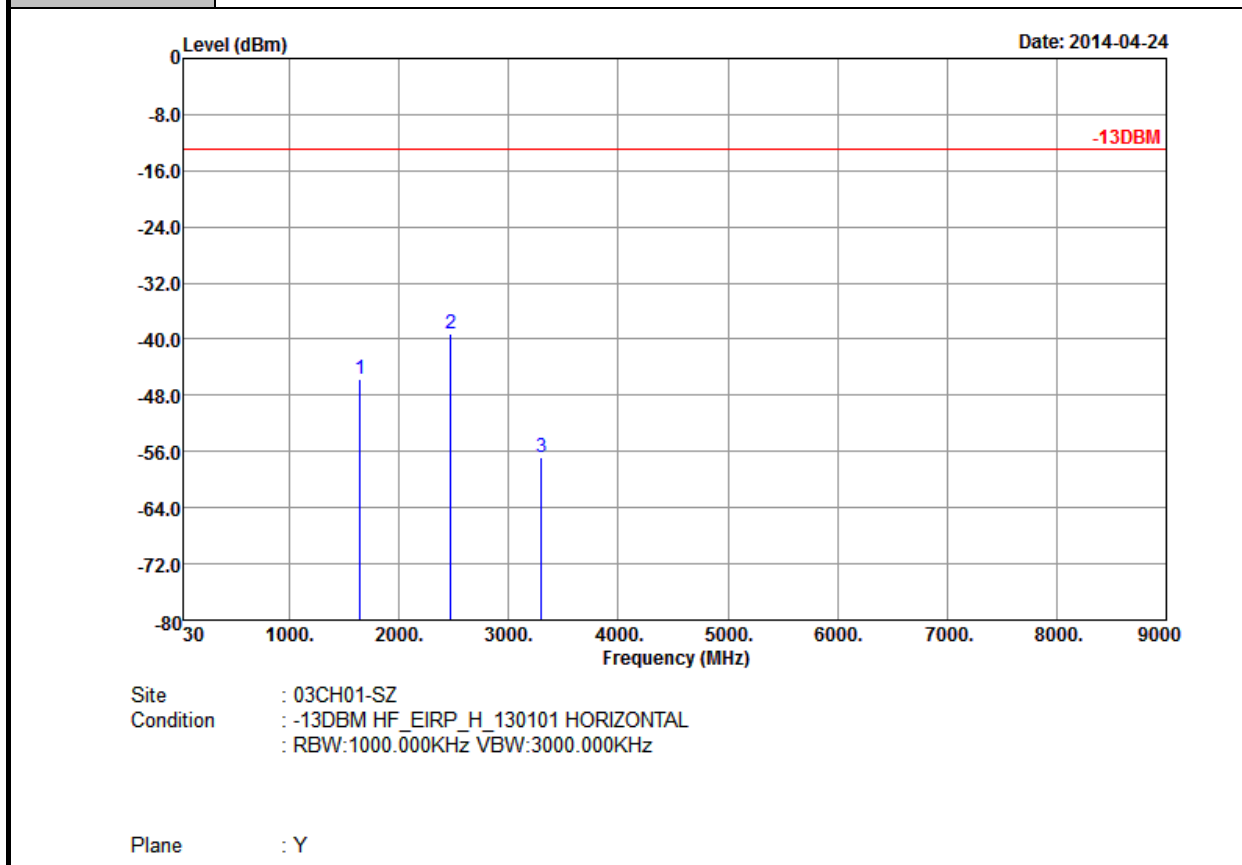

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 1648.4               | -45.72         | -13              | -32.72                  | -62.01                    | -48.54                   | 0.73                       | 5.70                          | H                       | Pass   |
| 2472.6               | -39.20         | -13              | -26.20                  | -63.77                    | -41.56                   | 0.91                       | 5.42                          | H                       | Pass   |
| 3296.8               | -56.73         | -13              | -43.73                  | -67.60                    | -61.37                   | 1.07                       | 7.86                          | H                       | Pass   |

|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850 for CH128                                                                 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

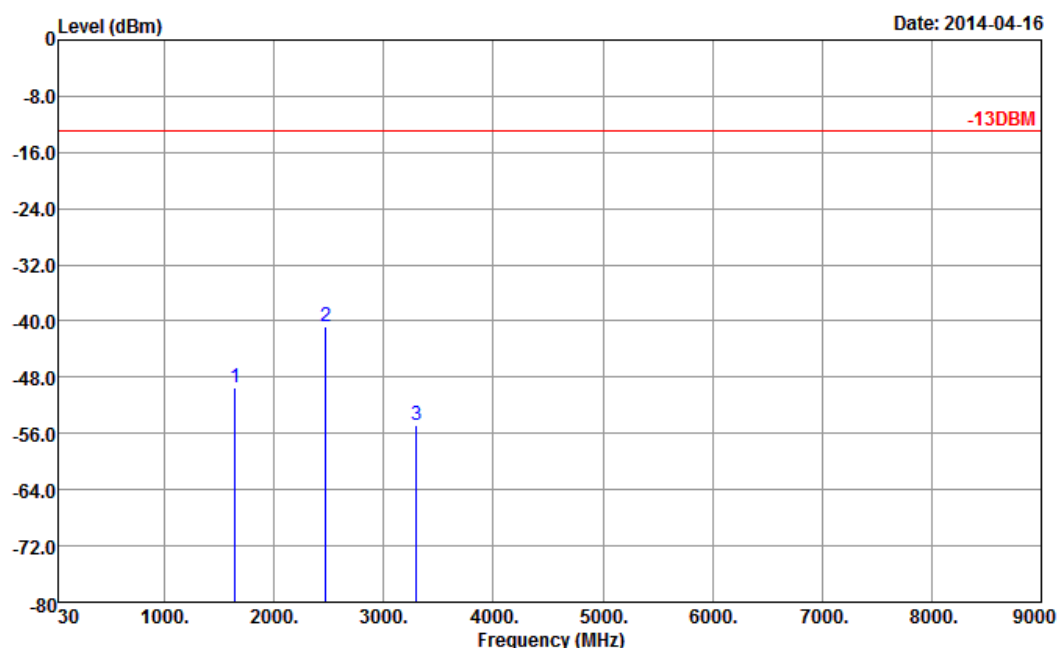


Site : 03CH01-SZ  
 Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL  
 : RBW:1000.000KHz VBW:3000.000KHz

Plane : Y


| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 1648.4               | -49.52         | -13              | -36.52                  | -62.68                    | -52.34                   | 0.73                       | 5.70                          | V                       | Pass   |
| 2472.6               | -40.84         | -13              | -27.84                  | -63.24                    | -43.20                   | 0.91                       | 5.42                          | V                       | Pass   |
| 3296.8               | -54.88         | -13              | -41.88                  | -67.06                    | -59.52                   | 1.07                       | 7.86                          | V                       | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH189                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

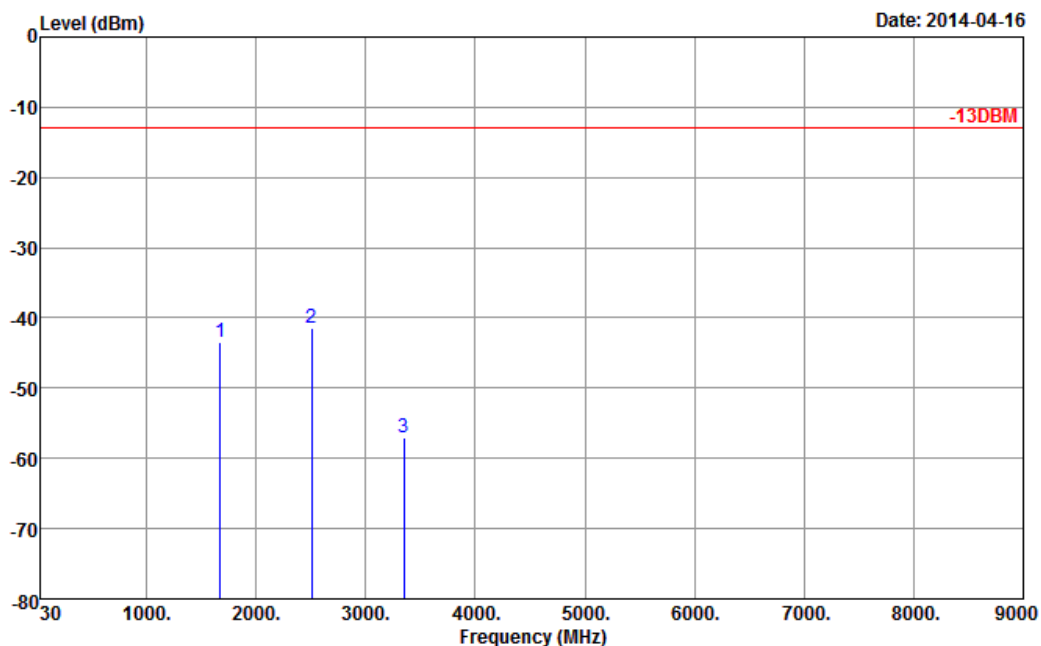


| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1672                 | -43.42         | -13              | -30.42                  | -59.59                  | -46.39                   | 0.88                       | 6.00                        | H                     | Pass   |
| 2510                 | -41.46         | -13              | -28.46                  | -65.59                  | -44.07                   | 1.08                       | 5.84                        | H                     | Pass   |
| 3346                 | -57.01         | -13              | -44.01                  | -67.61                  | -61.38                   | 1.14                       | 7.66                        | H                     | Pass   |

|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850 for CH189                                                                 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

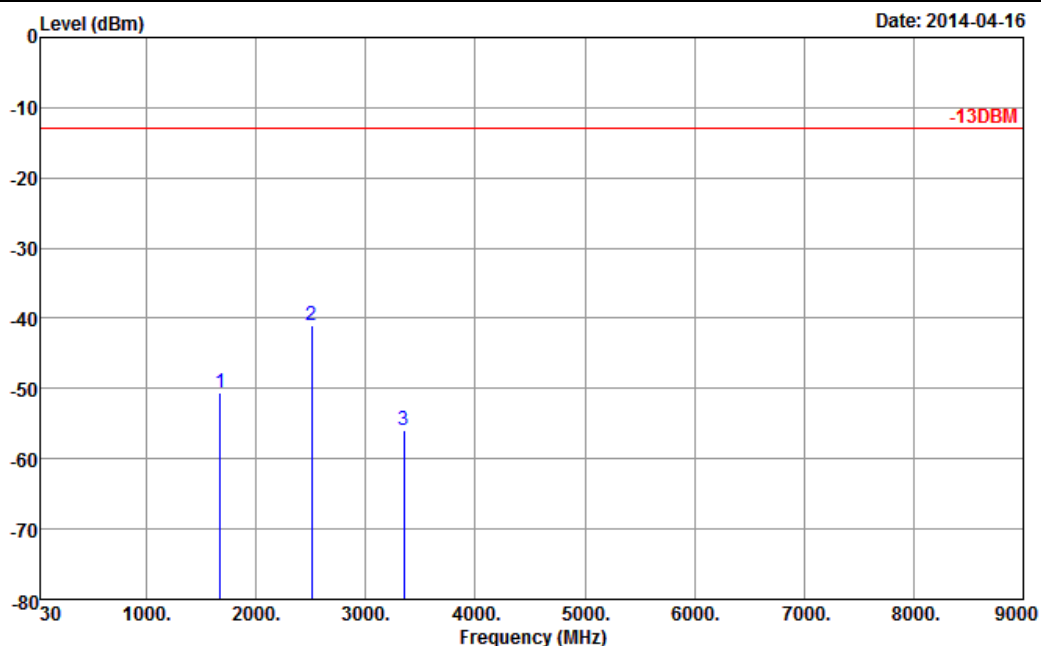


| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1672                 | -50.52         | -13              | -37.52                  | -62.85                  | -53.49                   | 0.88                       | 6.00                        | V                     | Pass   |
| 2510                 | -40.95         | -13              | -27.95                  | -63.03                  | -43.56                   | 1.08                       | 5.84                        | V                     | Pass   |
| 3346                 | -55.86         | -13              | -42.86                  | -67.69                  | -60.23                   | 1.14                       | 7.66                        | V                     | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH251                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

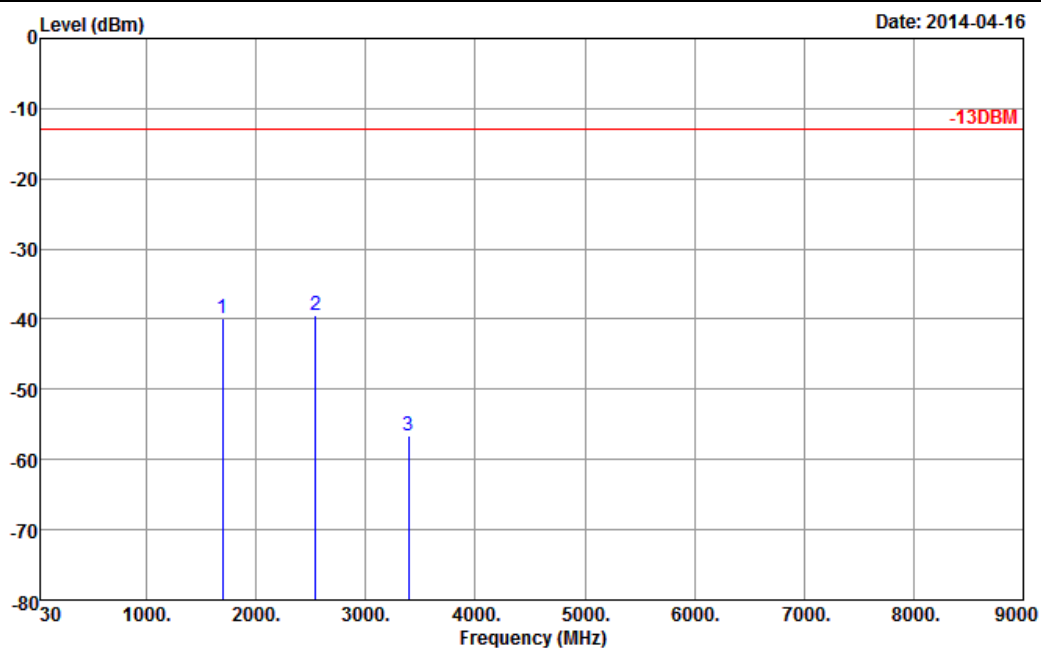

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1697.6               | -39.99         | -13              | -26.99                  | -57.00                  | -42.78                   | 0.95                       | 5.89                        | H                     | Pass   |
| 2546.4               | -39.51         | -13              | -26.51                  | -64.21                  | -42.22                   | 1.12                       | 5.98                        | H                     | Pass   |
| 3395.2               | -56.59         | -13              | -43.59                  | -67.79                  | -60.99                   | 1.25                       | 7.80                        | H                     | Pass   |

|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850 for CH251                                                                 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | GSM Link (GMSK)                                                                  | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

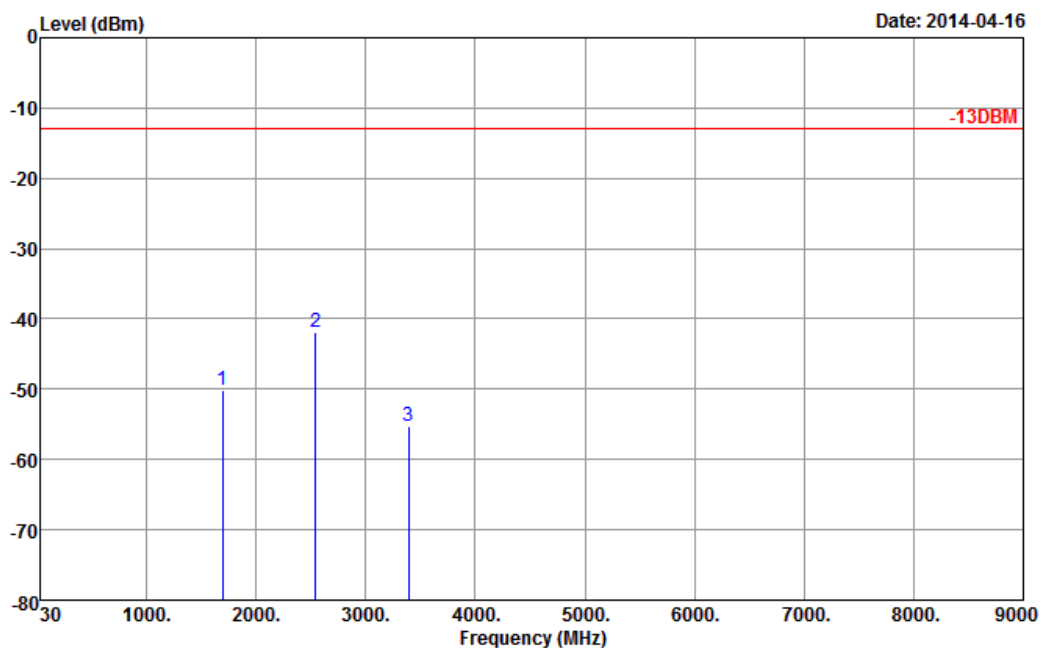


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1697.6               | -50.06         | -13              | -37.06                  | -62.80                  | -52.85                   | 0.95                       | 5.89                        | V                     | Pass   |
| 2546.4               | -41.79         | -13              | -28.79                  | -64.17                  | -44.50                   | 1.12                       | 5.98                        | V                     | Pass   |
| 3395.2               | -55.23         | -13              | -42.23                  | -67.66                  | -59.63                   | 1.25                       | 7.80                        | V                     | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH128                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

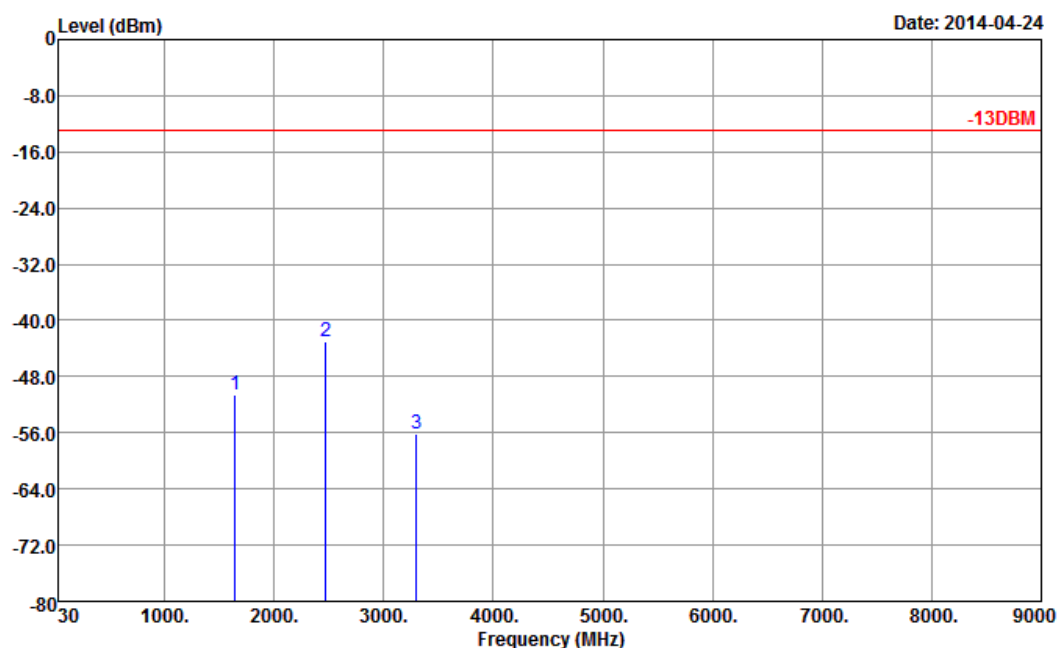


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL  
: RBW:1000.000KHz VBW:3000.000KHz

Plane : Y

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 1648.4               | -50.69         | -13              | -37.69                  | -65.77                    | -53.51                   | 0.73                       | 5.70                          | H                       | Pass   |
| 2472.6               | -43.03         | -13              | -30.03                  | -66.93                    | -45.39                   | 0.91                       | 5.42                          | H                       | Pass   |
| 3296.8               | -56.06         | -13              | -43.06                  | -66.93                    | -60.70                   | 1.07                       | 7.86                          | H                       | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM850 for CH128                                                                 | Temperature :       | 23~25°C  |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

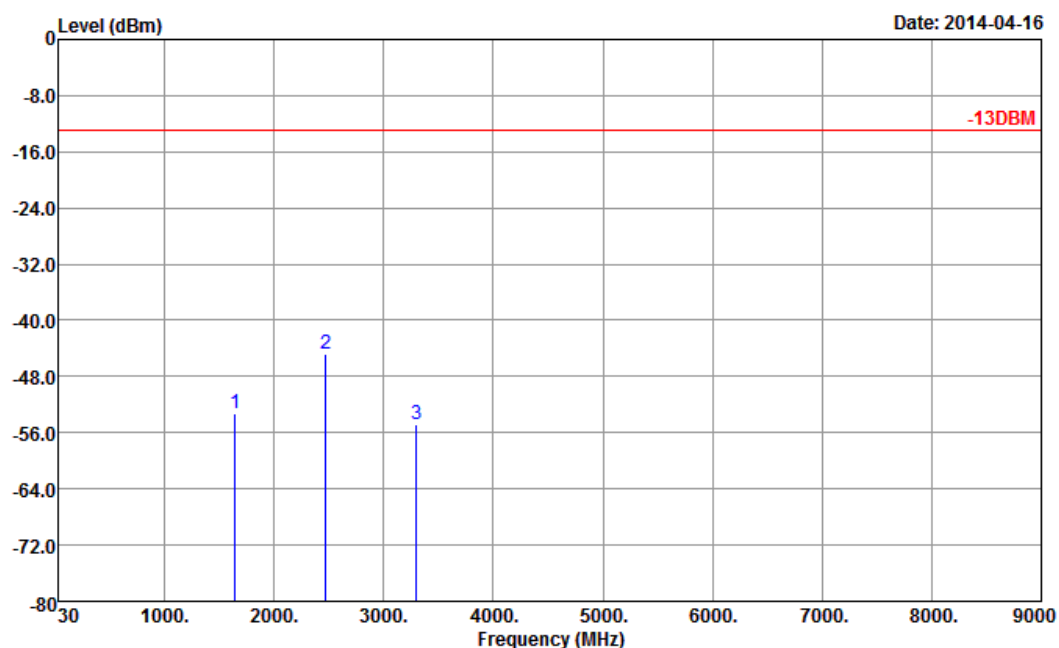


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL  
: RBW:1000.000KHz VBW:3000.000KHz

Plane : Y


| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1648.4               | -53.37         | -13              | -40.37                  | -65.38                  | -56.19                   | 0.73                       | 5.70                        | V                     | Pass   |
| 2472.6               | -44.81         | -13              | -31.81                  | -66.49                  | -47.17                   | 0.91                       | 5.42                        | V                     | Pass   |
| 3296.8               | -54.71         | -13              | -41.71                  | -66.89                  | -59.35                   | 1.07                       | 7.86                        | V                     | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH189                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

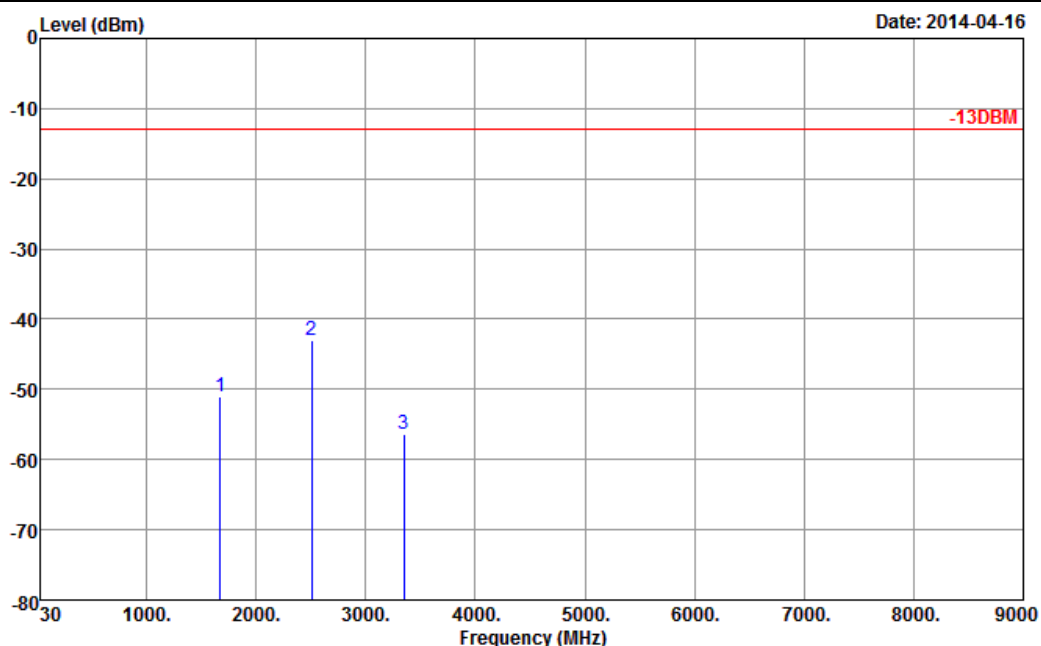

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1672                 | -50.95         | -13              | -37.95                  | -65.46                  | -53.92                   | 0.88                       | 6.00                        | H                     | Pass   |
| 2510                 | -42.94         | -13              | -29.94                  | -66.57                  | -45.55                   | 1.08                       | 5.84                        | H                     | Pass   |
| 3346                 | -56.46         | -13              | -43.46                  | -67.06                  | -60.83                   | 1.14                       | 7.66                        | H                     | Pass   |

|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850 for CH189                                                                 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

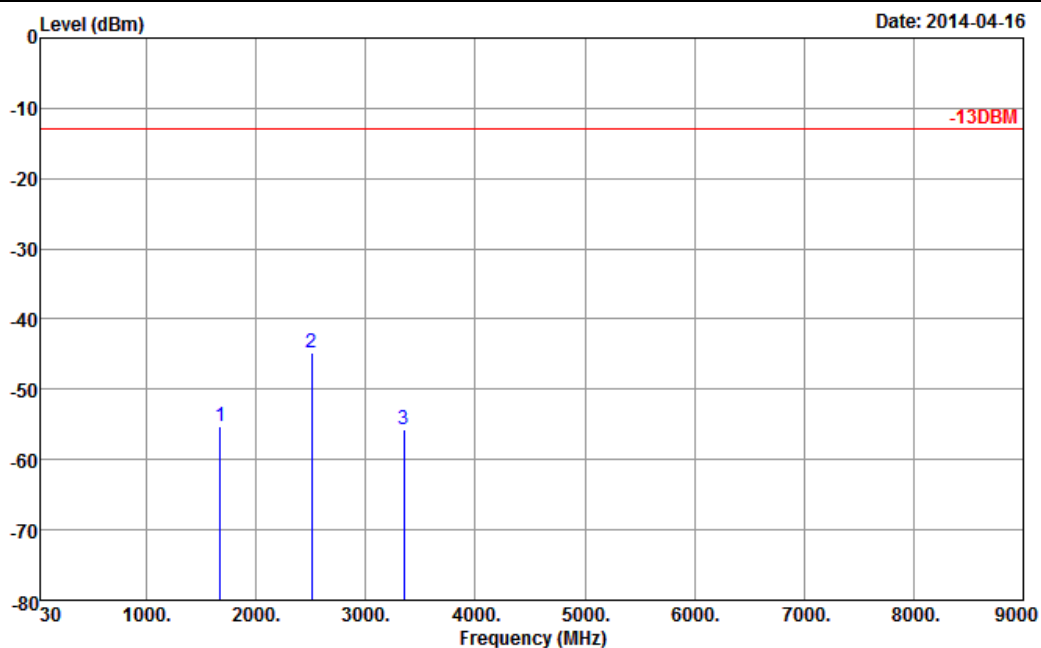


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 1672                 | -55.30         | -13              | -42.30                  | -65.93                    | -58.27                   | 0.88                       | 6.00                          | V                       | Pass   |
| 2510                 | -44.87         | -13              | -31.87                  | -66.26                    | -47.48                   | 1.08                       | 5.84                          | V                       | Pass   |
| 3346                 | -55.76         | -13              | -42.76                  | -67.59                    | -60.13                   | 1.14                       | 7.66                          | V                       | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM850 for CH251                                                                 | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

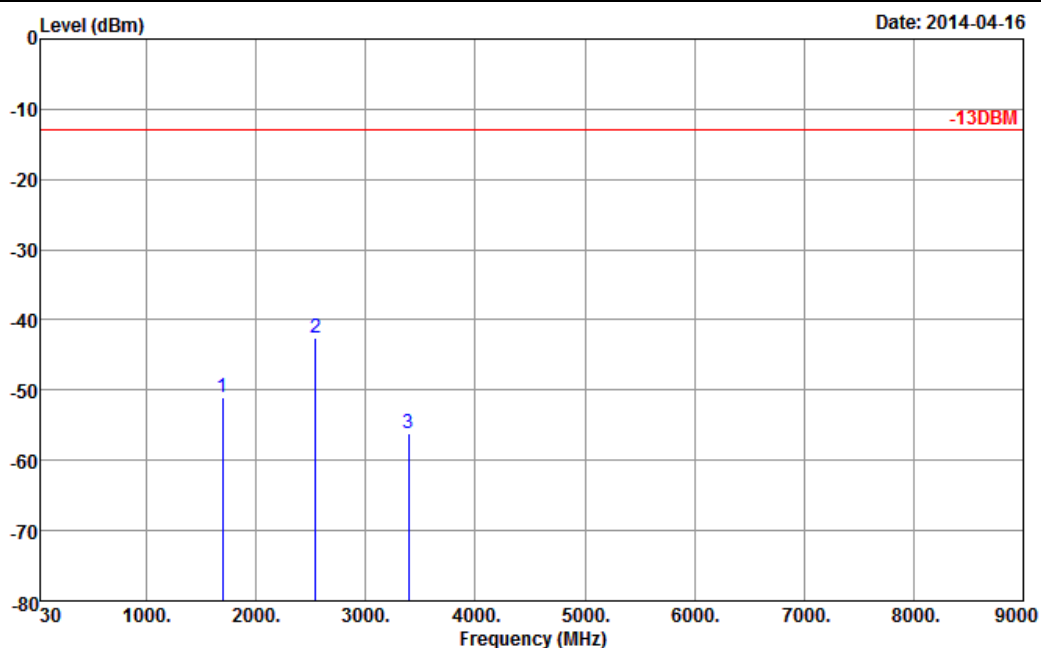


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1697.6               | -50.98         | -13              | -37.98                  | -65.84                  | -53.77                   | 0.95                       | 5.89                        | H                     | Pass   |
| 2546.4               | -42.55         | -13              | -29.55                  | -66.68                  | -45.26                   | 1.12                       | 5.98                        | H                     | Pass   |
| 3395.2               | -56.22         | -13              | -43.22                  | -67.42                  | -60.62                   | 1.25                       | 7.80                        | H                     | Pass   |


|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM850 for CH251                                                                 | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

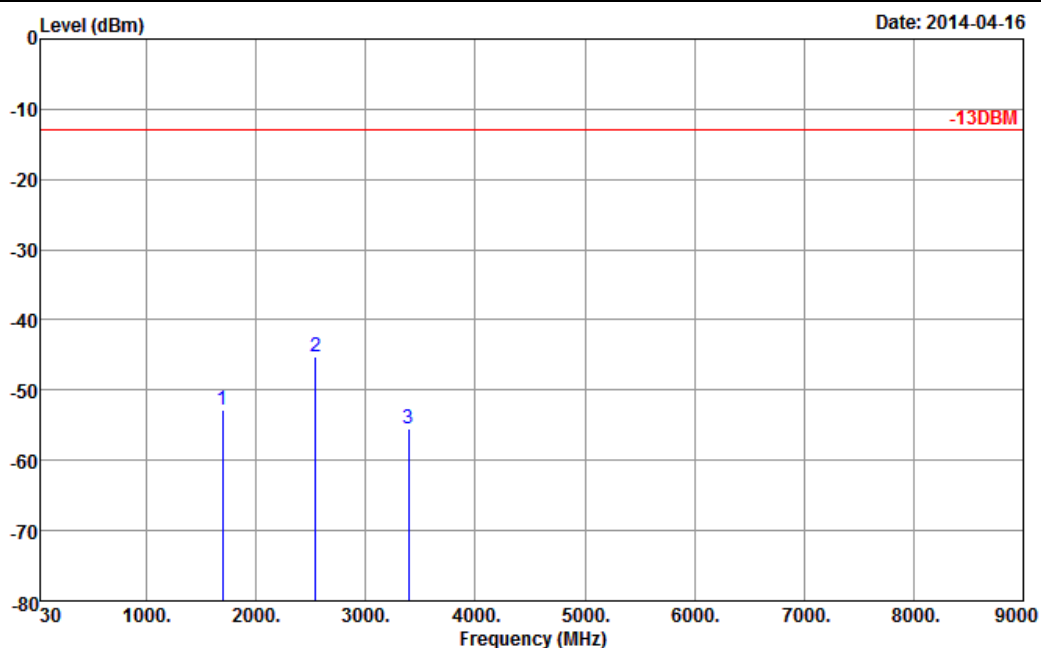

| Frequency<br>( MHz ) | ERP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 1697.6               | -52.72         | -13              | -39.72                  | -64.73                  | -55.51                   | 0.95                       | 5.89                        | V                     | Pass   |
| 2546.4               | -45.23         | -13              | -32.23                  | -66.91                  | -47.94                   | 1.12                       | 5.98                        | V                     | Pass   |
| 3395.2               | -55.38         | -13              | -42.38                  | -67.81                  | -59.78                   | 1.25                       | 7.80                        | V                     | Pass   |



|                 |                                                                                  |                     |            |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|
| Band :          | GSM1900 for CH512                                                                | Temperature :       | 23~25°C    |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%     |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Horizontal |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |

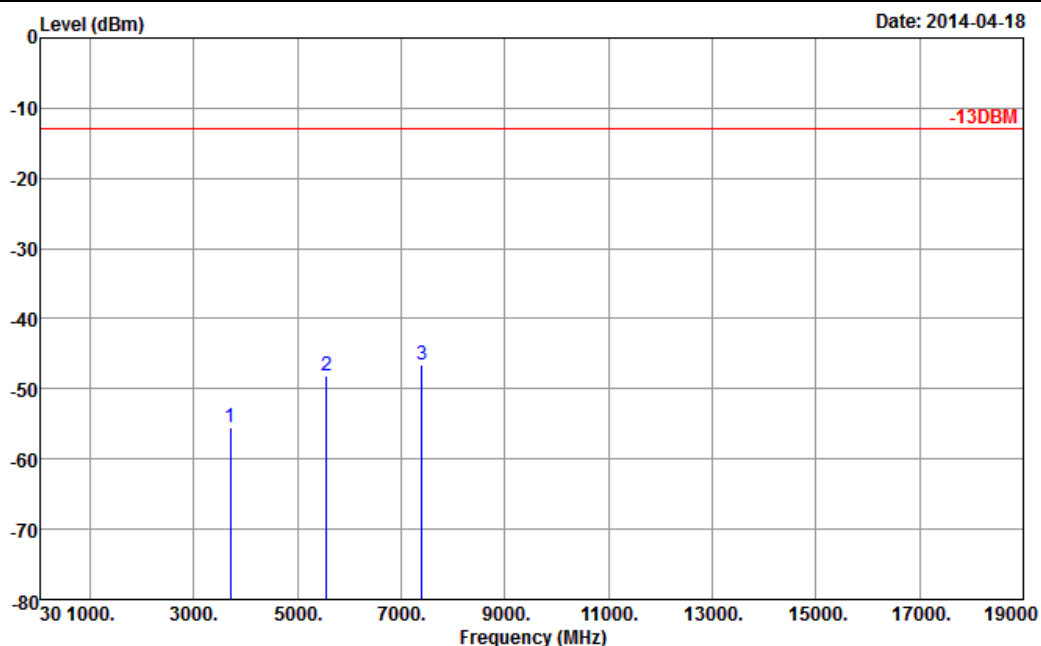


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3700.4               | -55.53          | -13              | -42.53                  | -67.08                  | -62.28                   | 1.2                        | 7.95                        | H                     | Pass   |
| 5550.6               | -48.20          | -13              | -35.20                  | -65.59                  | -56.30                   | 1.5                        | 9.60                        | H                     | Pass   |
| 7400.8               | -46.52          | -13              | -33.52                  | -68.10                  | -56.71                   | 1.7                        | 11.89                       | H                     | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM1900 for CH512                                                                | Temperature :       | 23~25°C  |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

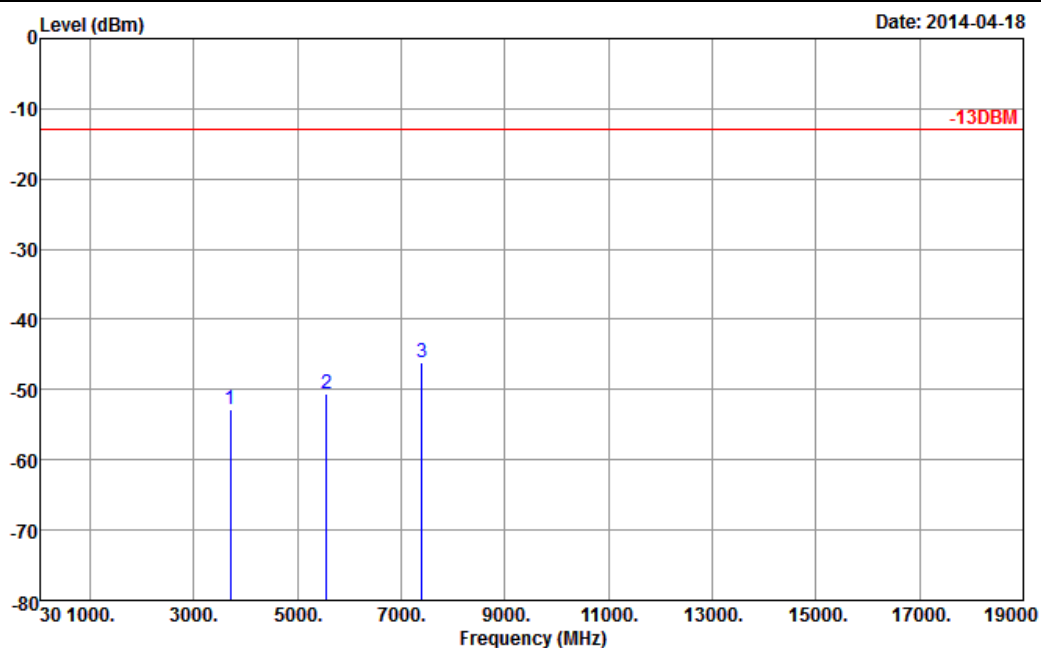


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3700.4               | -52.71          | -13              | -39.71                  | -67.14                  | -59.46                   | 1.2                        | 7.95                        | V                     | Pass   |
| 5550.6               | -50.62          | -13              | -37.62                  | -67.10                  | -58.72                   | 1.5                        | 9.6                         | V                     | Pass   |
| 7400.8               | -46.20          | -13              | -33.20                  | -68.09                  | -56.39                   | 1.7                        | 11.89                       | V                     | Pass   |



|                 |                                                                                  |                     |            |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|
| Band :          | GSM1900 for CH661                                                                | Temperature :       | 23~25°C    |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%     |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Horizontal |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |

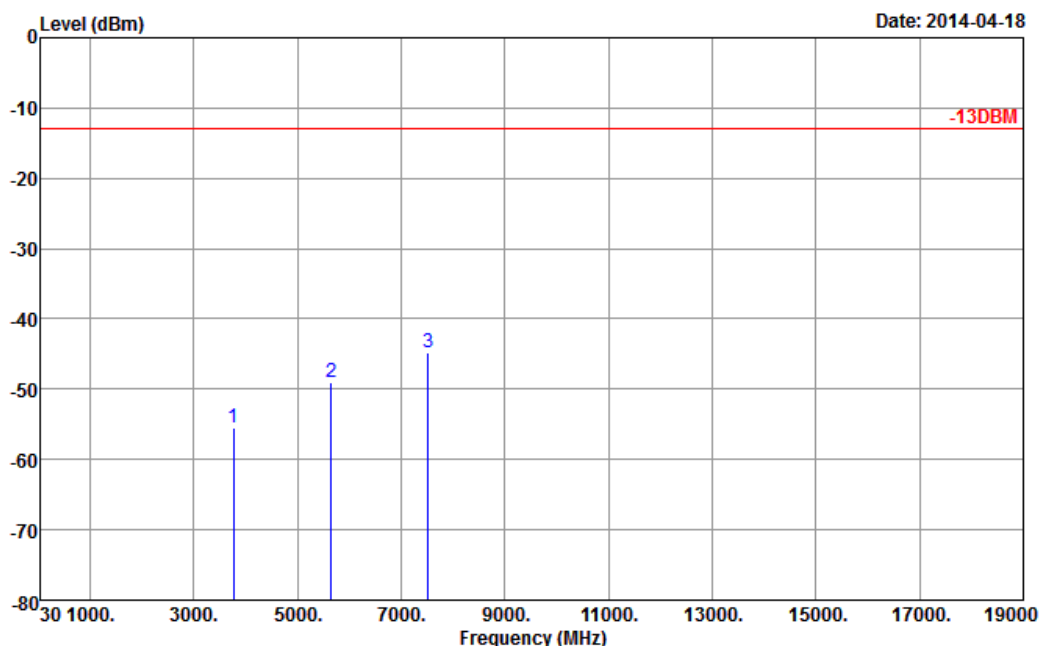


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3760                 | -55.40          | -13              | -42.40                  | -67.55                  | -62.14                   | 1.28                       | 8.02                        | H                     | Pass   |
| 5640                 | -49.06          | -13              | -36.06                  | -67.05                  | -57.48                   | 1.58                       | 10.00                       | H                     | Pass   |
| 7520                 | -44.85          | -13              | -31.85                  | -66.79                  | -55.17                   | 1.78                       | 12.10                       | H                     | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM1900 for CH661                                                                | Temperature :       | 23~25°C  |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

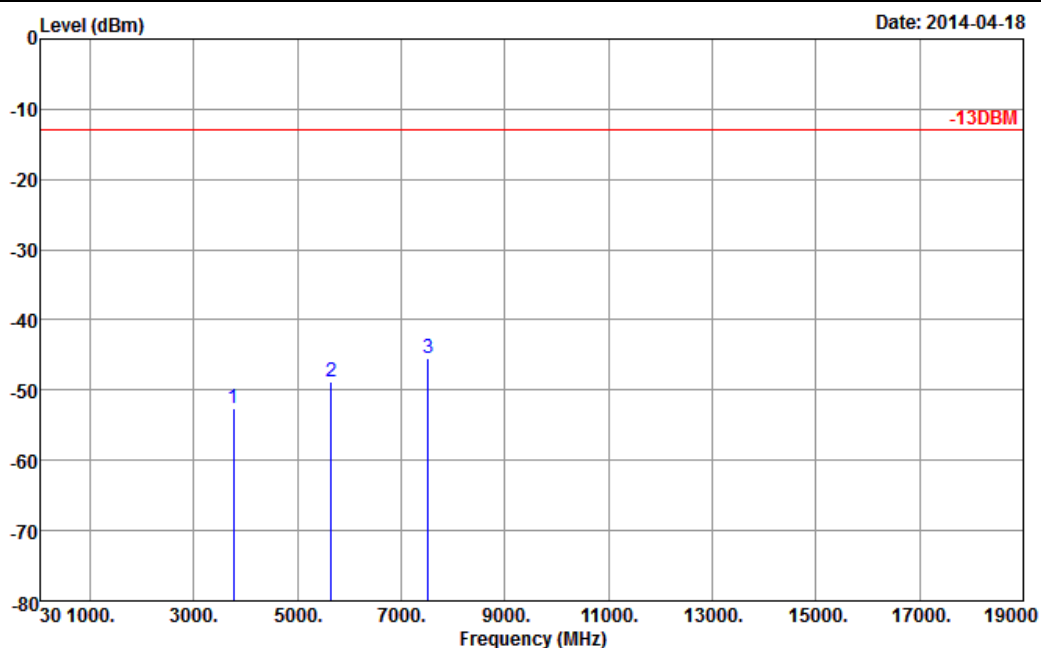


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|-----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 3760                 | -52.67          | -13              | -39.67                  | -67.70                    | -59.41                   | 1.28                       | 8.02                          | V                       | Pass   |
| 5640                 | -48.71          | -13              | -35.71                  | -65.79                    | -57.13                   | 1.58                       | 10                            | V                       | Pass   |
| 7520                 | -45.42          | -13              | -32.42                  | -67.67                    | -55.74                   | 1.78                       | 12.1                          | V                       | Pass   |



|                 |                                                                                  |                     |            |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|
| Band :          | GSM1900 for CH810                                                                | Temperature :       | 23~25°C    |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%     |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Horizontal |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |

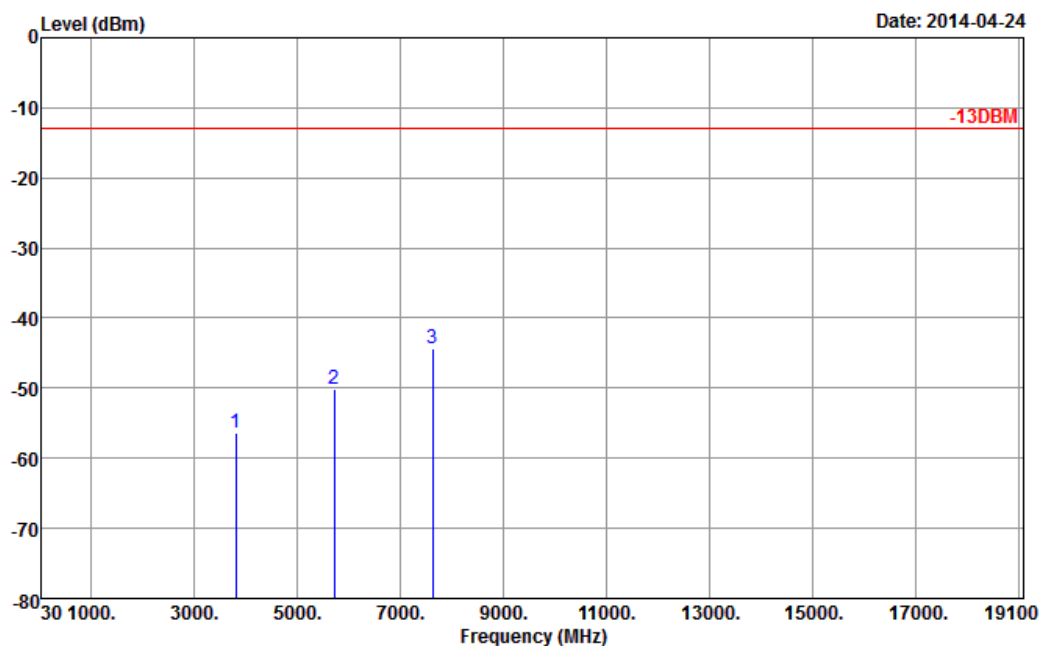


Site : 03CH01-SZ  
Condition : -13DBM HF EIRP H 130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3819.6               | -56.42          | -13              | -43.42                  | -67.99                  | -63.19                   | 1.23                       | 8.00                        | H                     | Pass   |
| 5729.4               | -50.14          | -13              | -37.14                  | -67.94                  | -58.27                   | 1.52                       | 9.65                        | H                     | Pass   |
| 7639.2               | -44.34          | -13              | -31.34                  | -66.58                  | -54.52                   | 1.82                       | 12.00                       | H                     | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM1900 for CH810                                                                | Temperature :       | 23~25°C  |
| Test Mode :     | GSM Link (GMSK)                                                                  | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

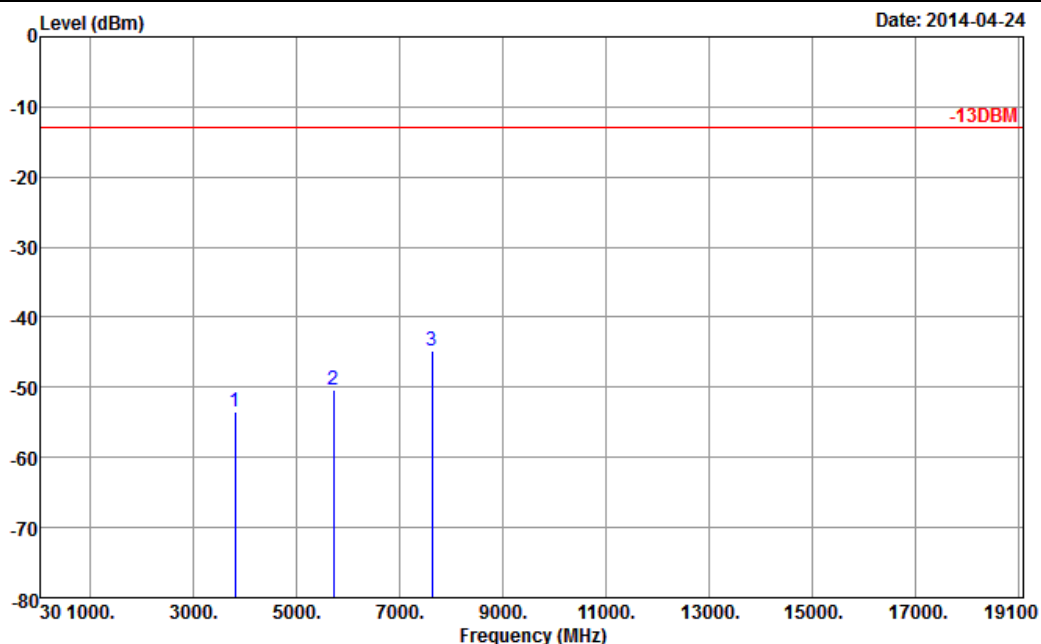


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3819.6               | -53.52          | -13              | -40.52                  | -67.97                  | -60.29                   | 1.23                       | 8                           | V                     | Pass   |
| 5729.4               | -50.36          | -13              | -37.36                  | -67.25                  | -58.49                   | 1.52                       | 9.65                        | V                     | Pass   |
| 7639.2               | -44.89          | -13              | -31.89                  | -67.44                  | -55.07                   | 1.82                       | 12                          | V                     | Pass   |



|                 |                                                                                  |                     |            |
|-----------------|----------------------------------------------------------------------------------|---------------------|------------|
| Band :          | GSM1900 for CH512                                                                | Temperature :       | 23~25°C    |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 48~52%     |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Horizontal |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |            |

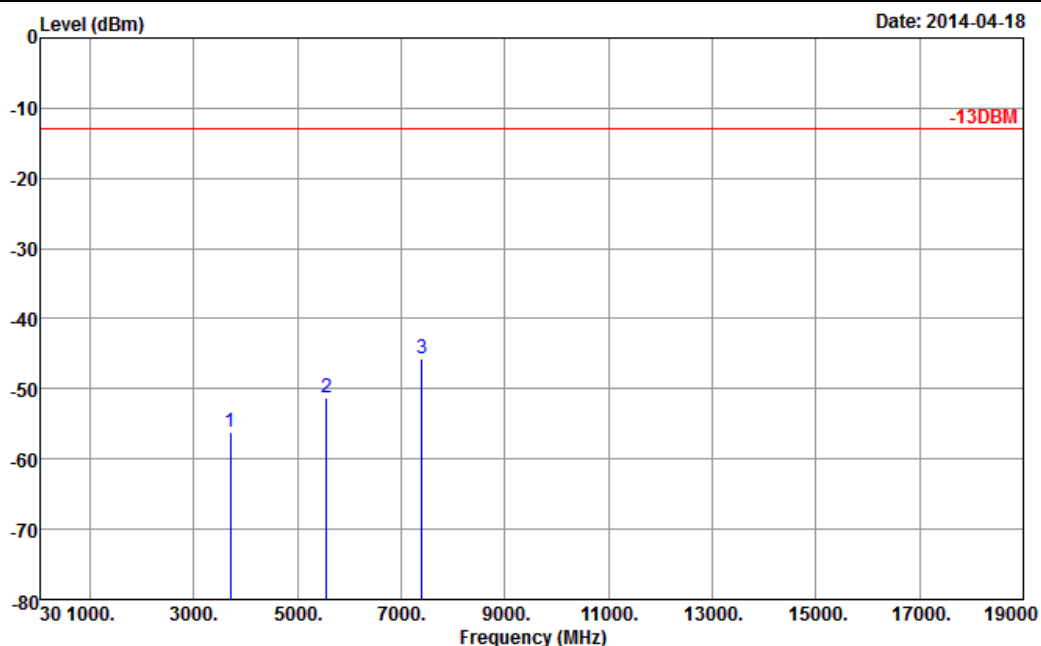


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3700.4               | -56.05          | -13              | -43.05                  | -67.60                  | -62.80                   | 1.2                        | 7.95                        | H                     | Pass   |
| 5550.6               | -51.36          | -13              | -38.36                  | -68.75                  | -59.46                   | 1.5                        | 9.60                        | H                     | Pass   |
| 7400.8               | -45.74          | -13              | -32.74                  | -67.32                  | -55.93                   | 1.7                        | 11.89                       | H                     | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM1900 for CH512                                                                | Temperature :       | 23~25°C  |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

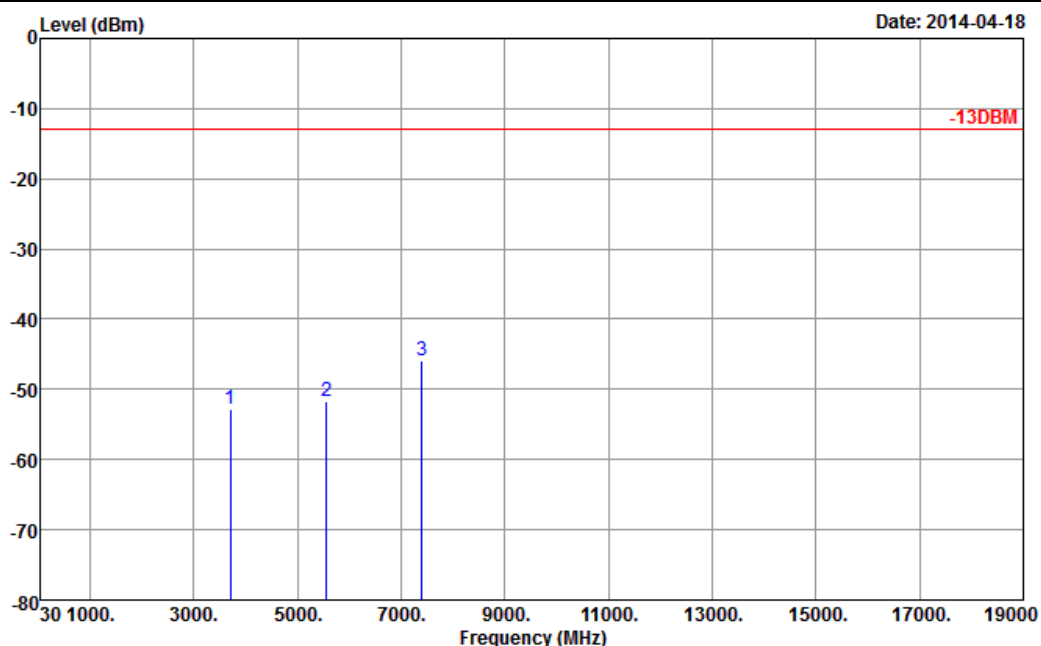


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3700.4               | -52.84          | -13              | -39.84                  | -67.27                  | -59.59                   | 1.2                        | 7.95                        | V                     | Pass   |
| 5550.6               | -51.81          | -13              | -38.81                  | -68.29                  | -59.91                   | 1.5                        | 9.6                         | V                     | Pass   |
| 7400.8               | -45.82          | -13              | -32.82                  | -67.71                  | -56.01                   | 1.7                        | 11.89                       | V                     | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900 for CH661                                                                | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

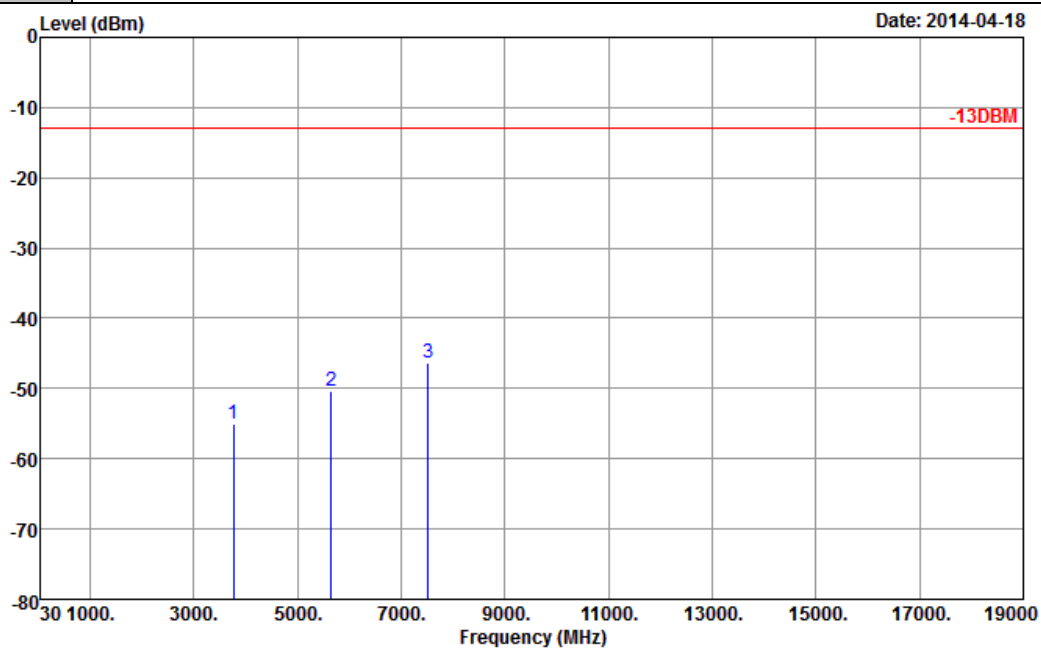


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_H\_130101 HORIZONTAL

Plane : Y

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3760                 | -54.98          | -13              | -41.98                  | -67.13                  | -61.72                   | 1.28                       | 8.02                        | H                     | Pass   |
| 5640                 | -50.39          | -13              | -37.39                  | -68.38                  | -58.81                   | 1.58                       | 10.00                       | H                     | Pass   |
| 7520                 | -46.44          | -13              | -33.44                  | -68.38                  | -56.76                   | 1.78                       | 12.10                       | H                     | Pass   |



|                 |                                                                                  |                     |          |
|-----------------|----------------------------------------------------------------------------------|---------------------|----------|
| Band :          | GSM1900 for CH661                                                                | Temperature :       | 23~25°C  |
| Test Mode :     | EDGE class 8 Link (8PSK)                                                         | Relative Humidity : | 48~52%   |
| Test Engineer : | Kaer Huang                                                                       | Polarization :      | Vertical |
| Remark :        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                     |          |

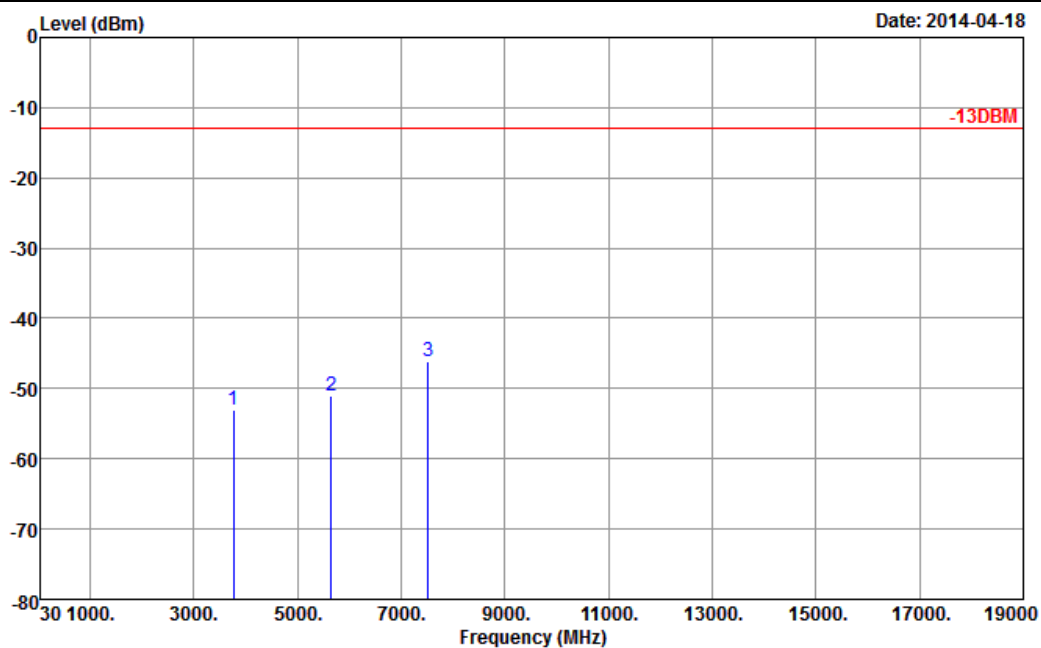


Site : 03CH01-SZ  
Condition : -13DBM HF\_EIRP\_V\_130101 VERTICAL

Plane : Y


| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>( dBm ) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>( dBi ) | Polarization<br>( H/V ) | Result |
|----------------------|-----------------|------------------|-------------------------|---------------------------|--------------------------|----------------------------|-------------------------------|-------------------------|--------|
| 3760                 | -53.08          | -13              | -40.08                  | -68.11                    | -59.82                   | 1.28                       | 8.02                          | V                       | Pass   |
| 5640                 | -51.02          | -13              | -38.02                  | -68.10                    | -59.44                   | 1.58                       | 10                            | V                       | Pass   |
| 7520                 | -46.04          | -13              | -33.04                  | -68.29                    | -56.36                   | 1.78                       | 12.1                          | V                       | Pass   |

|                        |                                                                                  |                            |            |
|------------------------|----------------------------------------------------------------------------------|----------------------------|------------|
| <b>Band :</b>          | GSM1900 for CH810                                                                | <b>Temperature :</b>       | 23~25°C    |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%     |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |            |

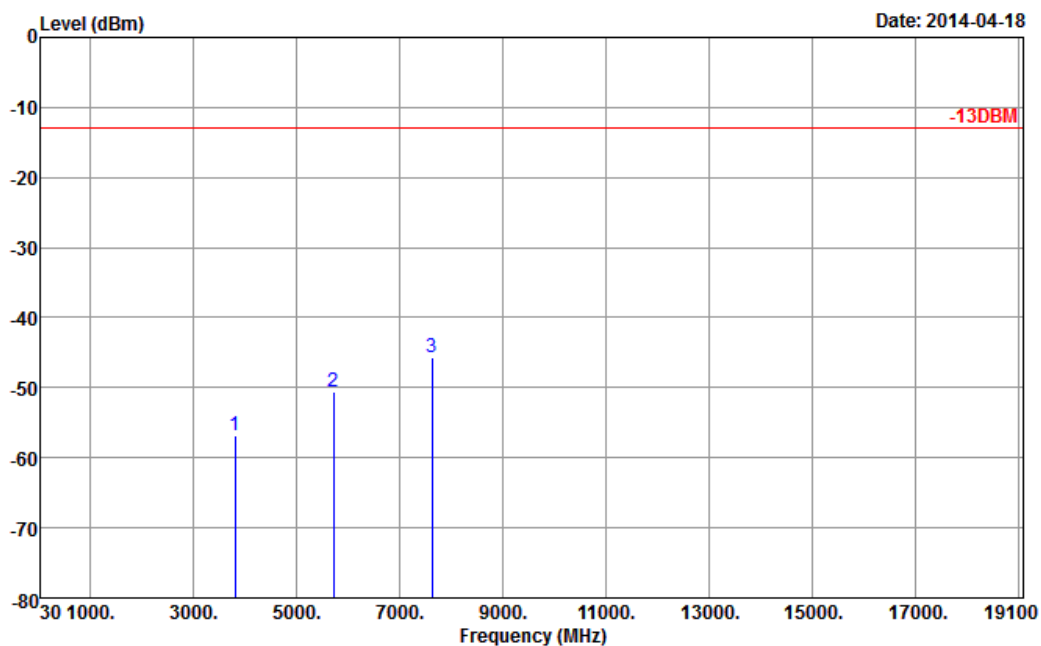

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3819.6               | -56.84          | -13              | -43.84                  | -68.41                  | -63.61                   | 1.23                       | 8.00                        | H                     | Pass   |
| 5729.4               | -50.48          | -13              | -37.48                  | -68.28                  | -58.61                   | 1.52                       | 9.65                        | H                     | Pass   |
| 7639.2               | -45.62          | -13              | -32.62                  | -67.86                  | -55.80                   | 1.82                       | 12.00                       | H                     | Pass   |

|                        |                                                                                  |                            |          |
|------------------------|----------------------------------------------------------------------------------|----------------------------|----------|
| <b>Band :</b>          | GSM1900 for CH810                                                                | <b>Temperature :</b>       | 23~25°C  |
| <b>Test Mode :</b>     | EDGE class 8 Link (8PSK)                                                         | <b>Relative Humidity :</b> | 48~52%   |
| <b>Test Engineer :</b> | Kaer Huang                                                                       | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | Spurious emissions within 30-1000MHz were found more than 20dB below limit line. |                            |          |

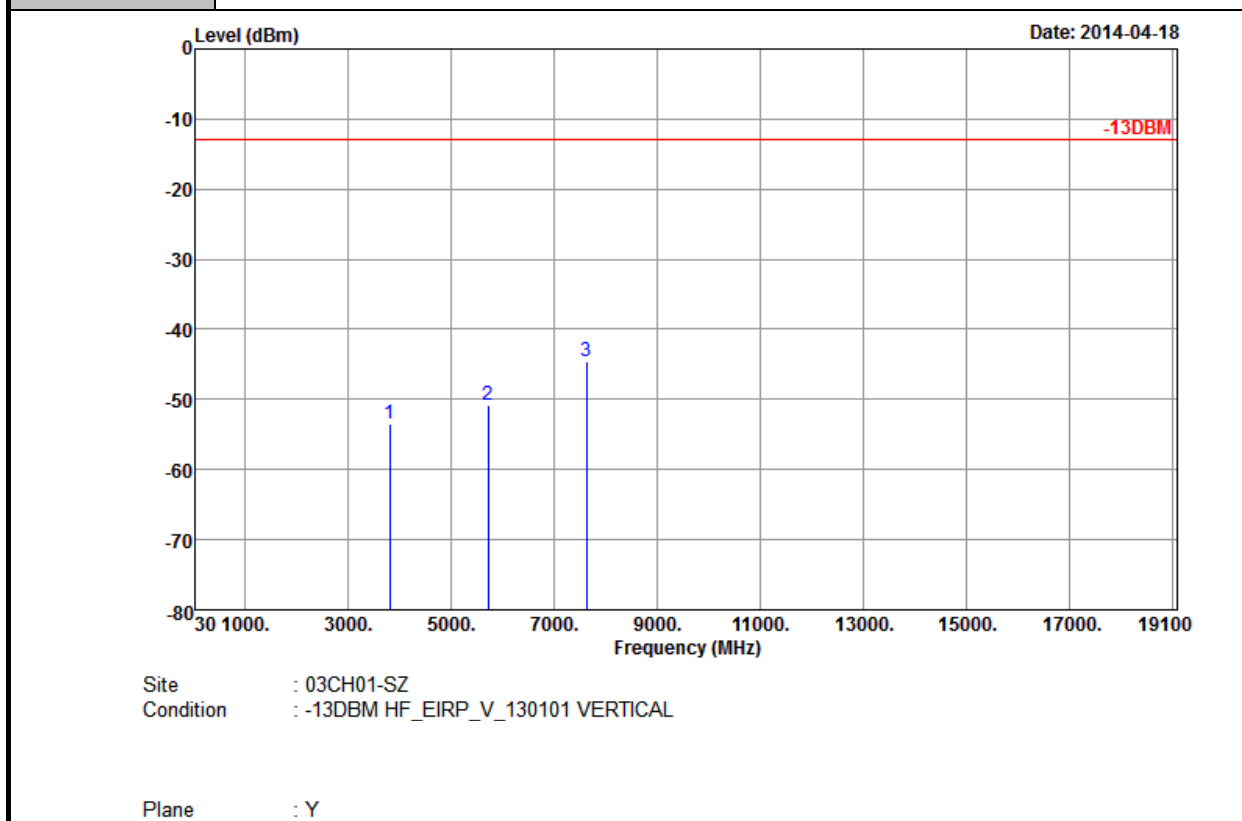

| Frequency<br>( MHz ) | EIRP<br>( dBm ) | Limit<br>( dBm ) | Over<br>Limit<br>( dB ) | SPA<br>Reading<br>(dBm) | S.G.<br>Power<br>( dBm ) | TX Cable<br>loss<br>( dB ) | TX Antenna<br>Gain<br>(dBi) | Polarization<br>(H/V) | Result |
|----------------------|-----------------|------------------|-------------------------|-------------------------|--------------------------|----------------------------|-----------------------------|-----------------------|--------|
| 3819.6               | -53.57          | -13              | -40.57                  | -68.02                  | -60.34                   | 1.23                       | 8                           | V                     | Pass   |
| 5729.4               | -50.79          | -13              | -37.79                  | -67.68                  | -58.92                   | 1.52                       | 9.65                        | V                     | Pass   |
| 7639.2               | -44.51          | -13              | -31.51                  | -67.06                  | -54.69                   | 1.82                       | 12                          | V                     | Pass   |

### 3.8 Frequency Stability Measurement

#### 3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


#### 3.8.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.8.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

### 3.8.5 Test Setup

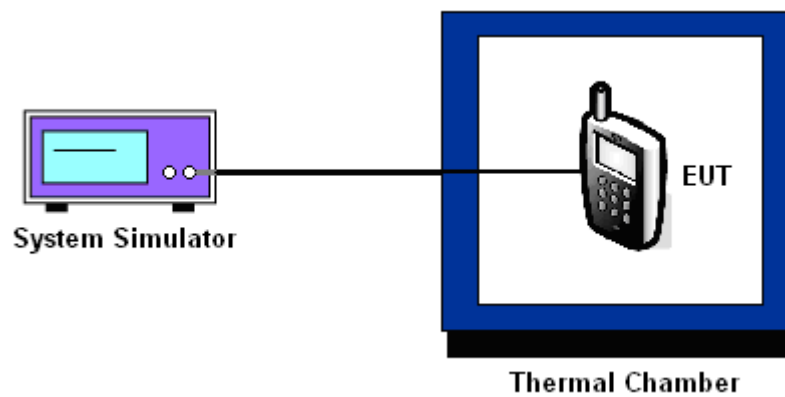

**3.8.6 Test Result of Temperature Variation**

|                      |         |                    |           |
|----------------------|---------|--------------------|-----------|
| <b>Band :</b>        | GSM 850 | <b>Channel :</b>   | 189       |
| <b>Limit (ppm) :</b> | 2.5     | <b>Frequency :</b> | 836.4 MHz |

| Temperature (°C) | GSM             |                 | EDGE class 8    |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | -19             | -0.02           | -20             | -0.02           | PASS   |
| -20              | -15             | -0.02           | -16             | -0.02           |        |
| -10              | -14             | -0.02           | -17             | -0.02           |        |
| 0                | -17             | -0.02           | -17             | -0.02           |        |
| 10               | -15             | -0.02           | -19             | -0.02           |        |
| 20               | -16             | -0.02           | -18             | -0.02           |        |
| 30               | -17             | -0.02           | -16             | -0.02           |        |
| 40               | -18             | -0.02           | -17             | -0.02           |        |
| 50               | -17             | -0.02           | -19             | -0.02           |        |

|                      |          |                    |            |
|----------------------|----------|--------------------|------------|
| <b>Band :</b>        | GSM 1900 | <b>Channel :</b>   | 661        |
| <b>Limit (ppm) :</b> | 2.5      | <b>Frequency :</b> | 1880.0 MHz |

| Temperature (°C) | GSM             |                 | EDGE class 8    |                 | Result |
|------------------|-----------------|-----------------|-----------------|-----------------|--------|
|                  | Freq. Dev. (Hz) | Deviation (ppm) | Freq. Dev. (Hz) | Deviation (ppm) |        |
| -30              | -25             | -0.01           | -42             | -0.02           | PASS   |
| -20              | -22             | -0.01           | -38             | -0.02           |        |
| -10              | -21             | -0.01           | -37             | -0.02           |        |
| 0                | -24             | -0.01           | -41             | -0.02           |        |
| 10               | -20             | -0.01           | -39             | -0.02           |        |
| 20               | -23             | -0.01           | -40             | -0.02           |        |
| 30               | -19             | -0.01           | -42             | -0.02           |        |
| 40               | -22             | -0.01           | -41             | -0.02           |        |
| 50               | -24             | -0.01           | -43             | -0.02           |        |

**3.8.7 Test Result of Voltage Variation**

| Band & Channel    | Mode            | Voltage (Volt) | Freq. Dev. (Hz) | Deviation (ppm) | Limit (ppm) | Result |
|-------------------|-----------------|----------------|-----------------|-----------------|-------------|--------|
| GSM 850<br>CH189  | GSM             | 3.8            | -17             | -0.02           | 2.5         | PASS   |
|                   |                 | BEP            | -16             | -0.02           |             |        |
|                   |                 | 4.2            | -18             | -0.02           |             |        |
|                   | EDGE<br>class 8 | 3.8            | -18             | -0.02           |             |        |
|                   |                 | BEP            | -19             | -0.02           |             |        |
|                   |                 | 4.2            | -20             | -0.02           |             |        |
| GSM 1900<br>CH661 | GSM             | 3.8            | -24             | -0.01           |             |        |
|                   |                 | BEP            | -22             | -0.01           |             |        |
|                   |                 | 4.2            | -23             | -0.01           |             |        |
|                   | EDGE<br>class 8 | 3.8            | -40             | -0.02           |             |        |
|                   |                 | BEP            | -41             | -0.02           |             |        |
|                   |                 | 4.2            | -43             | -0.02           |             |        |

**Note:**

1. Normal Voltage = 3.8V.
2. Battery End Point (BEP) = 3.6 V.

## 4 List of Measuring Equipment

| Instrument                | Manufacturer   | Model No. | Serial No. | Characteristics | Calibration Date | Test Date                       | Due Date      | Remark                |
|---------------------------|----------------|-----------|------------|-----------------|------------------|---------------------------------|---------------|-----------------------|
| Signal Analyzer           | R&S            | FSV40     | 101078     | 10Hz~40GHz      | Jun. 17, 2013    | Mar. 12, 2014~<br>Mar. 14, 2014 | Jun. 16, 2014 | Conducted (TH01-SZ)   |
| Thermal Chamber           | Hongzhan       | LP-150U   | HD20120425 | -40℃~150℃       | Feb. 21, 2014    | Mar. 12, 2014~<br>Mar. 14, 2014 | Feb. 20, 2015 | Conducted (TH01-SZ)   |
| Signal Analyzer           | R&S            | FSV40     | 101078     | 10Hz~40GHz      | Jun. 17, 2013    | Apr. 16, 2014~<br>Apr. 24, 2014 | Jun. 16, 2014 | Radiation (03CH01-SZ) |
| Bilog Antenna             | TESEQ          | CBL 6112D | 23188      | 30MHz~2GHz      | Oct. 26, 2013    | Apr. 16, 2014~<br>Apr. 24, 2014 | Oct. 25, 2014 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna | ETS Lindgren   | 3117      | 00119436   | 1GHz~18GHz      | Oct. 26, 2013    | Apr. 16, 2014~<br>Apr. 24, 2014 | Oct. 25, 2014 | Radiation (03CH01-SZ) |
| SHF-EHF Horn              | Schwarzbeck    | BBHA 9170 | BBHA170249 | 15GHz~40GHz     | Mar. 10, 2014    | Apr. 16, 2014~<br>Apr. 24, 2014 | Mar. 09, 2015 | Radiation (03CH01-SZ) |
| Amplifier                 | ADVANTEST      | BB525C    | E9007003   | 9kHz~3000MHz    | Feb. 21, 2014    | Apr. 16, 2014~<br>Apr. 24, 2014 | Feb. 20, 2015 | Radiation (03CH01-SZ) |
| Amplifier                 | Agilent        | 83017A    | MY39501302 | 3Hz~26.5GHz     | Mar. 03, 2014    | Apr. 16, 2014~<br>Apr. 24, 2014 | Mar. 02, 2015 | Radiation (03CH01-SZ) |
| Turn Table                | EM Electronics | EM 1000   | N/A        | 0~360 degree    | NCR              | Apr. 16, 2014~<br>Apr. 24, 2014 | NCR           | Radiation (03CH01-SZ) |
| Antenna Mast              | EM Electronics | EM 1000   | N/A        | 1 m~4 m         | NCR              | Apr. 16, 2014~<br>Apr. 24, 2014 | NCR           | Radiation (03CH01-SZ) |

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                          |      |
|--------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2U_c(y)$ ) | 3.90 |
|--------------------------------------------------------------------------|------|