



FCC CFR47 PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL NUMBER: SM-G355H/DS, SM-G355H

FCC ID: A3LSMG355HM

REPORT NUMBER: 14I17666-4 Revision A

ISSUE DATE: May 12, 2014

Prepared for

SAMSUNG ELECTRONICS CO., LTD.

416, MAETAN 3-DONG, YEONGTONG-GU

SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

Prepared by

UL VERIFICATION SERVICES INC.

47173 BENICIA STREET

FREMONT, CA 94538, U.S.A.

TEL: (510) 771-1000

FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	4/29/14	Initial Issue	P. Zhang
A	5/12/14	Updated summary table	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. MAXIMUM OUTPUT POWER	7
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	7
5.4. WORST-CASE CONFIGURATION AND MODE	8
5.5. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. SUMMARY TABLE	13
9. ANTENNA PORT TEST RESULTS	14
9.1. 6 dB BANDWIDTH	14
9.1.1. 802.11b MODE IN THE 2.4 GHz BAND	15
9.1.2. 802.11g MODE IN THE 2.4 GHz BAND	15
9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	15
9.1.4. PLOTS	16
9.2. 99% BANDWIDTH	19
9.2.1. 802.11b MODE IN THE 2.4 GHz BAND	19
9.2.2. 802.11g MODE IN THE 2.4 GHz BAND	19
9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	19
9.2.1. PLOTS	20
9.3. AVERAGE POWER	23
9.3.1. 802.11b MODE IN THE 2.4 GHz BAND	24
9.3.2. 802.11g MODE IN THE 2.4 GHz BAND	24
9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	24
9.4. OUTPUT POWER	25
9.4.1. 802.11b MODE IN THE 2.4 GHz BAND	26
9.4.2. 802.11g MODE IN THE 2.4 GHz BAND	26
9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND	26
9.4.1. PLOTS	28
9.5. PSD	31

9.5.1.	802.11b MODE IN THE 2.4 GHz BAND.....	31
9.5.2.	802.11g MODE IN THE 2.4 GHz BAND.....	31
9.5.3.	802.11n HT20 MODE IN THE 2.4 GHz BAND.....	31
9.5.1.	PLOTS.....	32
9.6.	<i>OUT-OF-BAND EMISSIONS</i>	35
9.6.1.	802.11b MODE IN THE 2.4 GHz BAND.....	36
9.6.2.	802.11g MODE IN THE 2.4 GHz BAND.....	42
9.6.3.	802.11n MODE IN THE 2.4 GHz BAND.....	48
10.	RADIATED TEST RESULTS	54
10.1.	<i>LIMITS AND PROCEDURE</i>	54
10.2.	<i>TRANSMITTER ABOVE 1 GHz</i>	55
10.2.1.	TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND	55
10.2.2.	TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	68
10.2.3.	TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND	81
10.3.	<i>WORST-CASE BELOW 1 GHz</i>	94
11.	AC POWER LINE CONDUCTED EMISSIONS	97
12.	SETUP PHOTOS	101

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA

EUT DESCRIPTION: GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

MODEL: SM-G355H/DS, SM-G355H

SERIAL NUMBER: FL-164-C (Radiated), FL-164-D (Conducted)

DATE TESTED: April 25 – 29, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL Verification Services Inc. By:

Tested By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.4-2009.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

GSM/WCDMA Phone + Bluetooth & WLAN 2.4GHz b/g/n

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	18.92	77.98
2412 - 2462	802.11g	22.05	160.32
2412 - 2462	802.11n HT20	19.93	98.40

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -1.4 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20mode: MCS0

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	G355H	N/A	N/A
Earphone	Samsung	G355H	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is a stand-alone unit during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

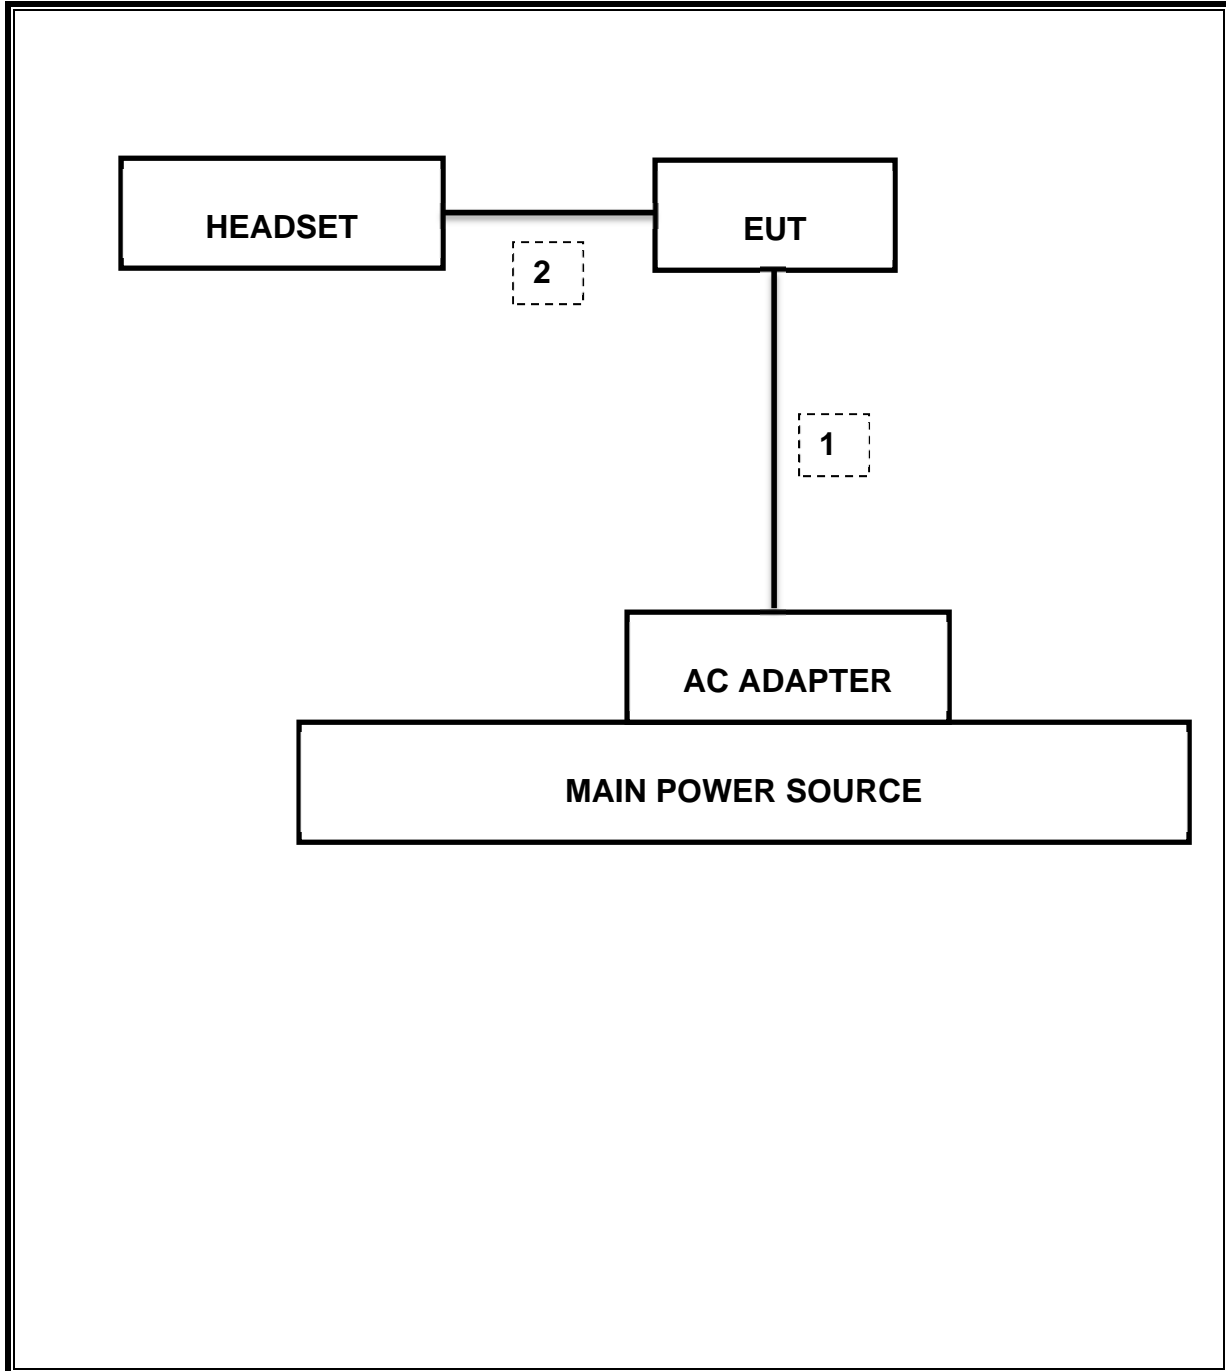

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01016	08/14/14
Antenna, Horn, 18 GHz	ETS	3117	C01006	12/11/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	01/16/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	10/21/14
PXA SIGNAL ANALYZER	Agilent / HP	N9030A	N/A	05/09/14
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/08/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014

7. MEASUREMENT METHODS

KDB 558074 D01 DTS Meas Guidance v03r01:Measurement Procedure PK2 is used for power and PKPSD is used for power spectral density.

Spurious emissions within Restricted Bands are measured using traditional radiated procedures.

For Band edge testing: resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.

8. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	8.04MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-34.59dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	22.05dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-5.12dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	49.77dBuV/m
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	47.71dBuV/m

9. ANTENNA PORT TEST RESULTS

9.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

Reference to KDB 558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to a spectrum analyzer with the RBW set to 100KHz, the VBW $\geq 3 \times$ RBW, peak detector and max hold.

RESULTS

9.1.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	8.57	0.5
Mid	2437	8.04	0.5
High	2462	8.49	0.5
Worst		8.04	

9.1.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.18	0.5
Mid	2437	15.12	0.5
High	2462	15.12	0.5
Worst		15.12	

9.1.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.06	0.5
Mid	2437	15.03	0.5
High	2462	15.15	0.5
Worst		15.03	

9.1.4. PLOTS


802.11b 6 dB BANDWIDTH

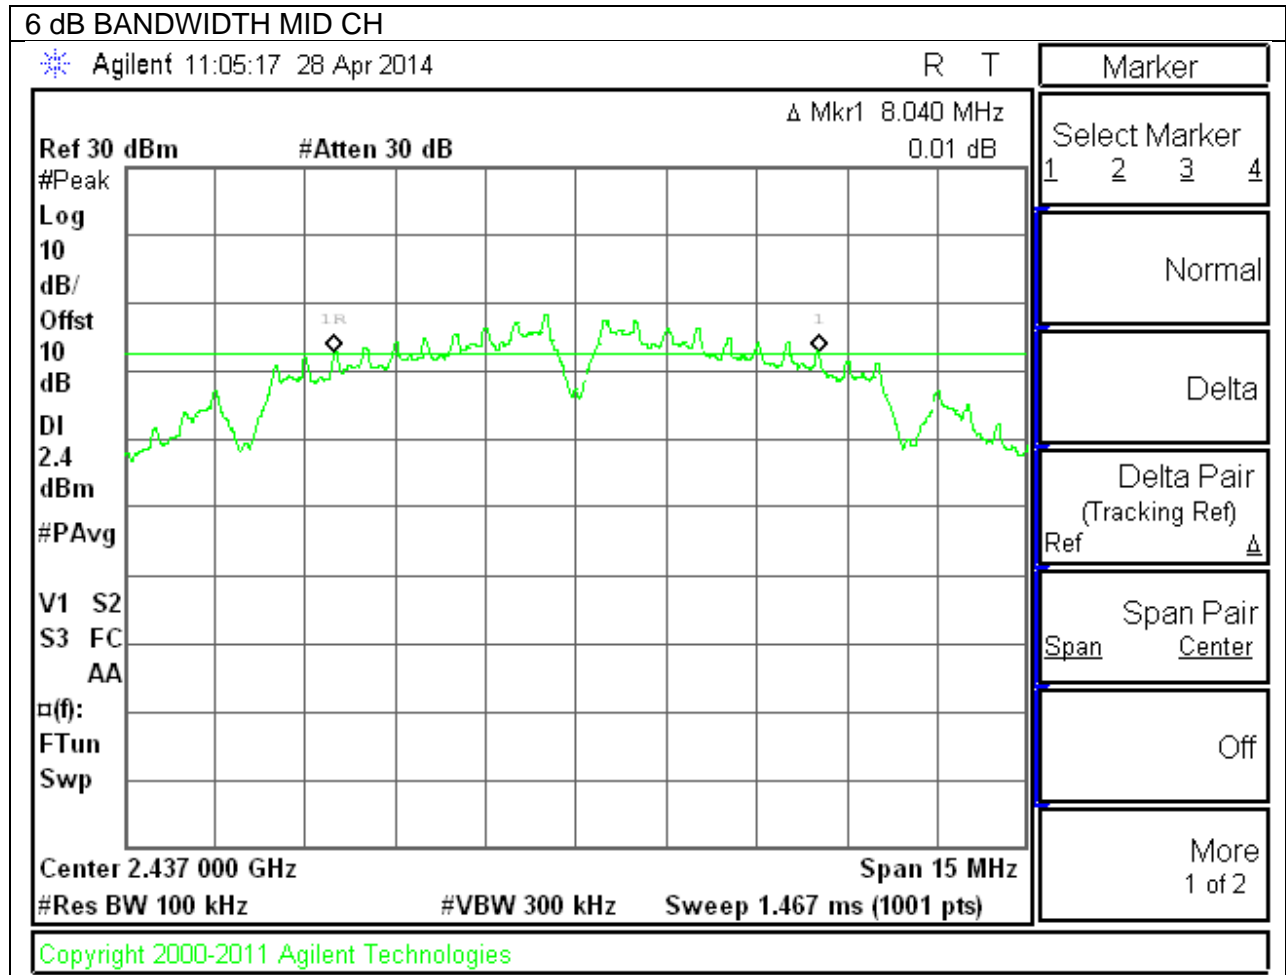

802.11g 6 dB BANDWIDTH

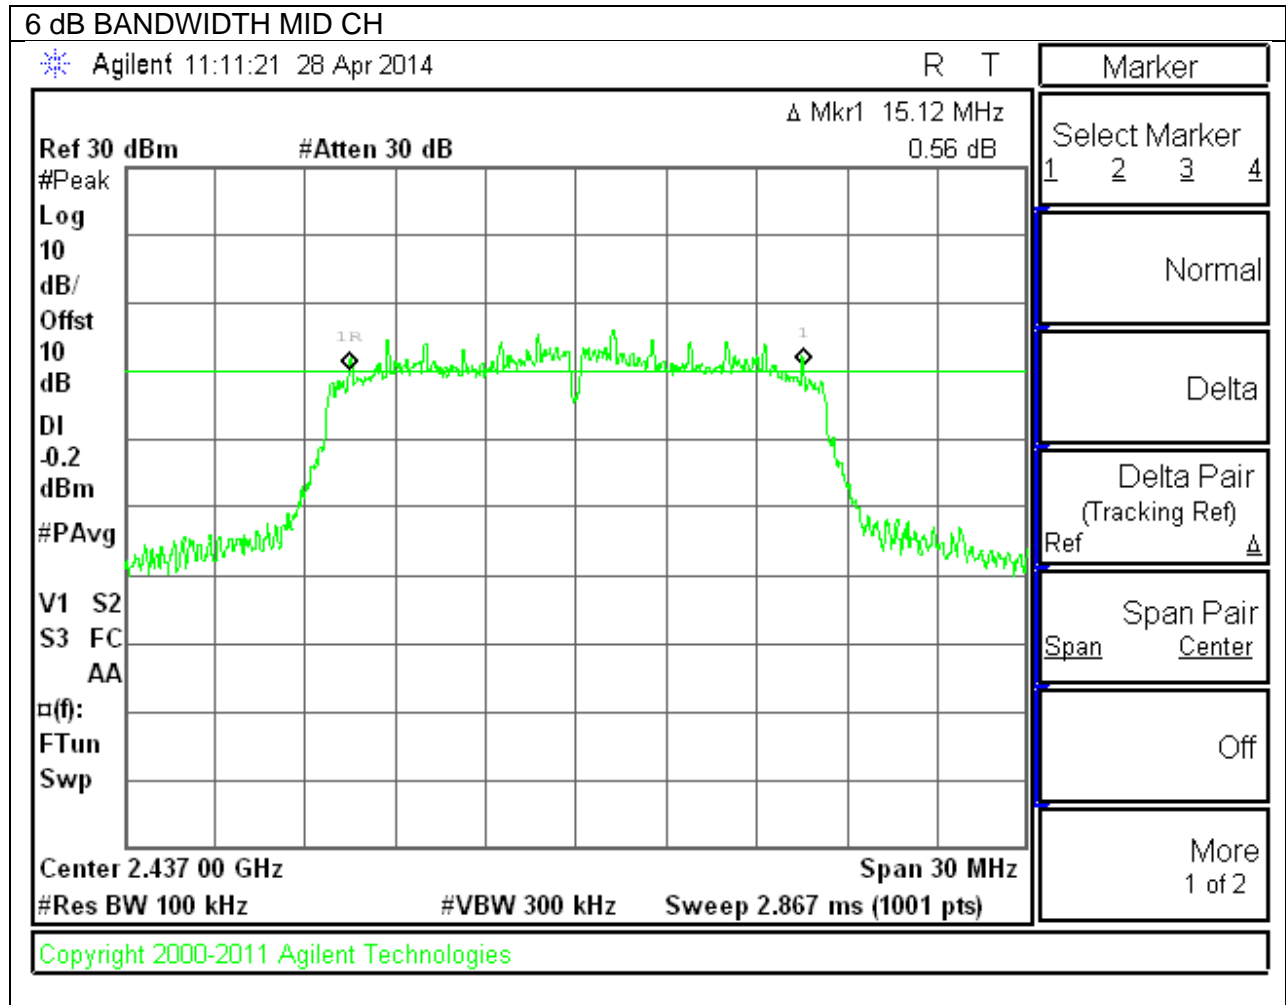

802.11n 6 dB BANDWIDTH

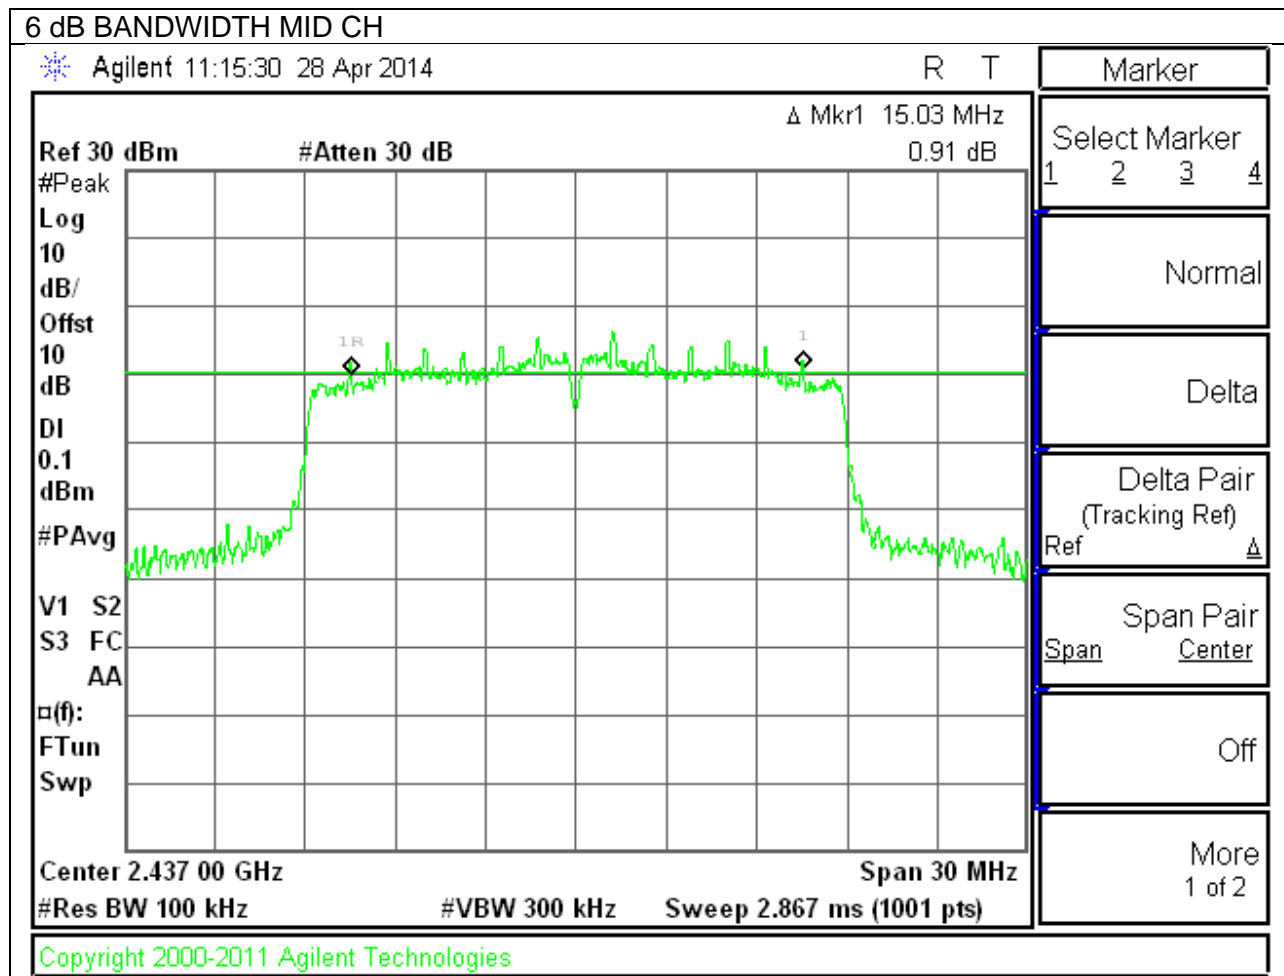

9.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

RESULTS

9.2.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.77
Mid	2437	12.69
High	2462	12.65
Worst		12.77

9.2.2. 802.11g MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.04
Mid	2437	16.14
High	2462	16.19
Worst		16.19

9.2.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	17.28
Mid	2437	17.23
High	2462	17.31
Worst		17.31

9.2.1. PLOTS


802.11b 99% BANDWIDTH

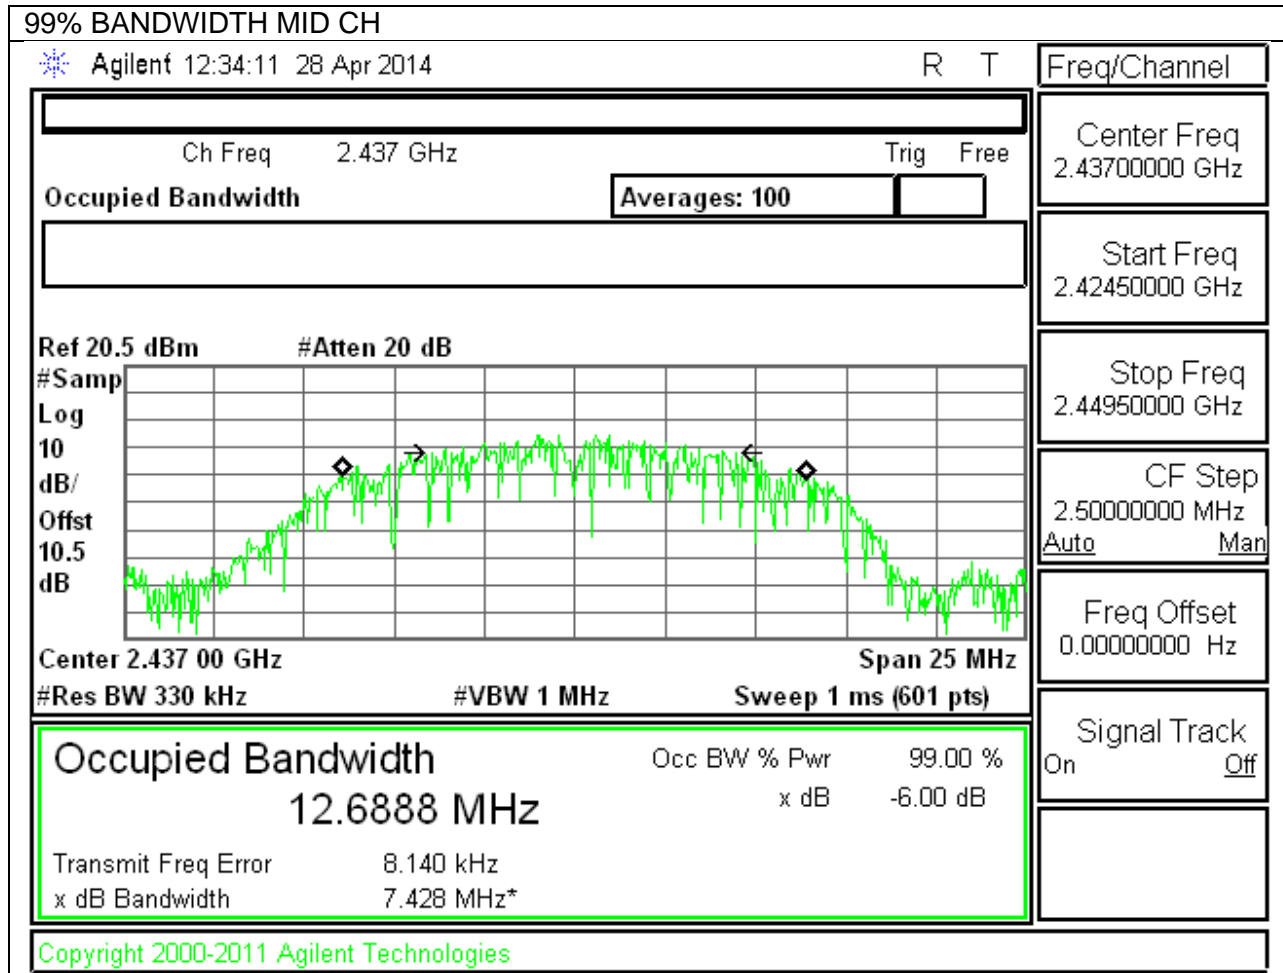

802.11g 99% BANDWIDTH

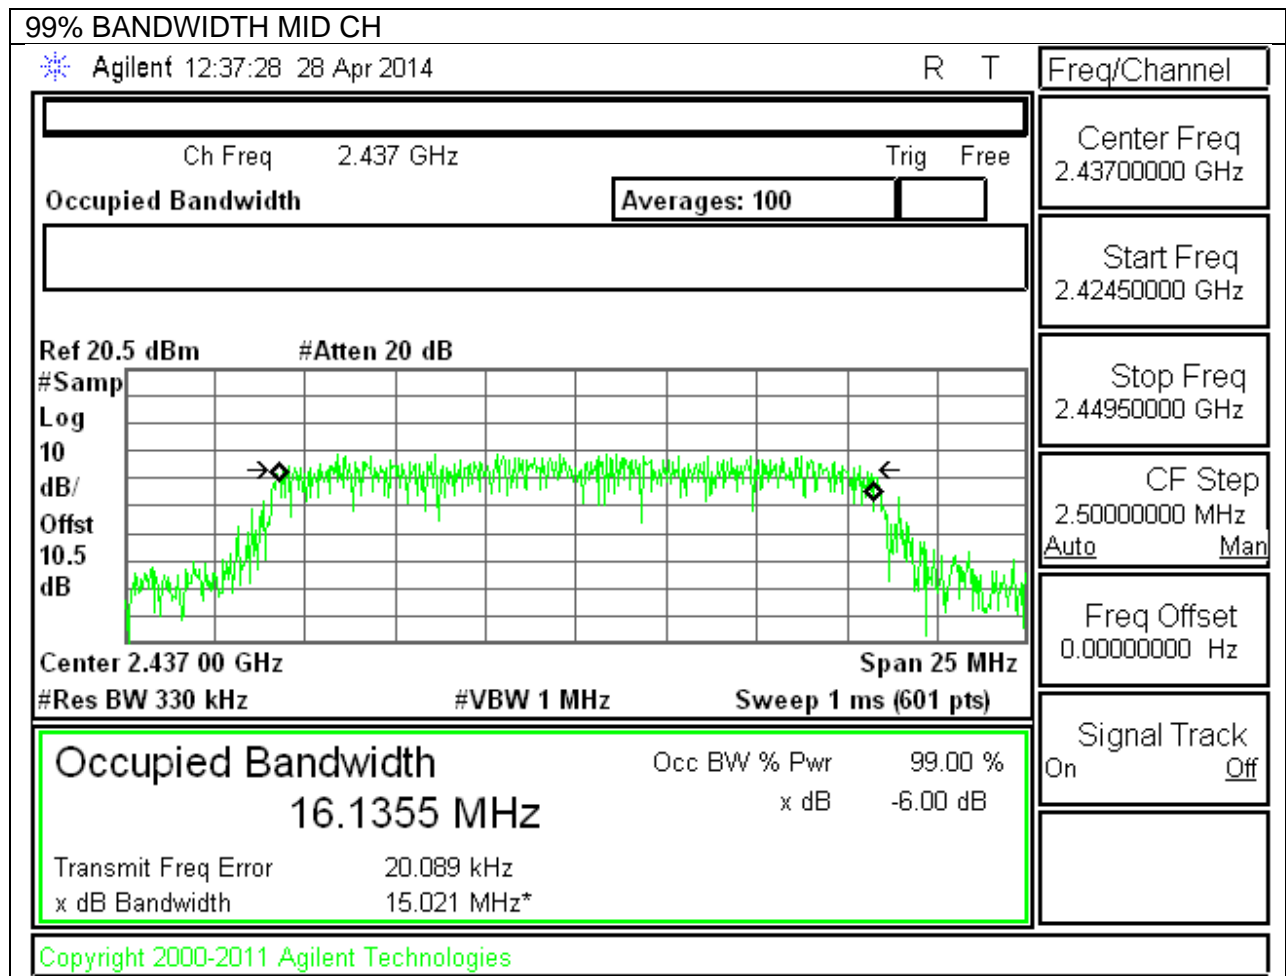

802.11n 99% BANDWIDTH

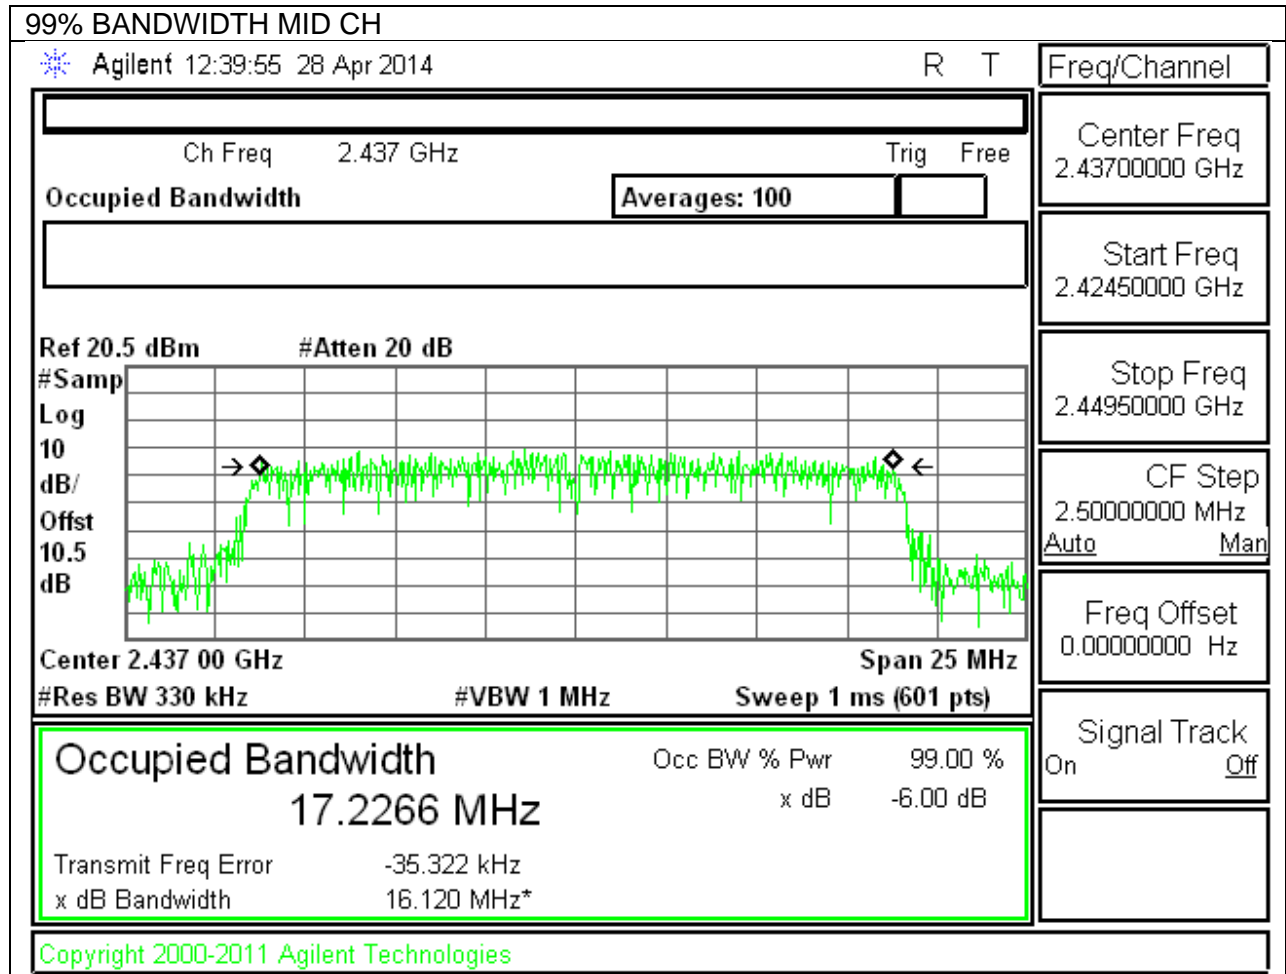

9.3. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

The cable assembly insertion loss of 10.2 dB (including 10 dB pad and 0.2 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

RESULTS

9.3.1. 802.11b MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	16.40
Mid	2437	16.50
High	2462	16.40
Worst		16.500

9.3.2. 802.11g MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	13.80
Mid	2437	14.00
High	2462	13.90
Worst		14.000

9.3.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Channel	Frequency (MHz)	Avg Power (dBm)
Low	2412	11.70
Mid	2437	11.90
High	2462	11.90
Worst		11.900

9.4. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-210 A8.4

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

RESULTS

9.4.1. 802.11b MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-1.40	30.00	30	36	30.00
Mid	2437	-1.40	30.00	30	36	30.00
High	2462	-1.40	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	18.92	18.92	30.00	-11.08
Mid	2437	18.91	18.91	30.00	-11.09
High	2462	18.83	18.83	30.00	-11.17
Worst			18.92		

9.4.2. 802.11g MODE IN THE 2.4 GHz BAND

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-1.40	30.00	30	36	30.00
Mid	2437	-1.40	30.00	30	36	30.00
High	2462	-1.40	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	21.96	21.96	30.00	-8.04
Mid	2437	21.97	21.97	30.00	-8.03
High	2462	22.05	22.05	30.00	-7.95
Worst			22.05		

9.4.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

Limits


Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low	2412	-1.40	30.00	30	36	30.00
Mid	2437	-1.40	30.00	30	36	30.00
High	2462	-1.40	30.00	30	36	30.00

Results


Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
Low	2412	19.83	19.83	30.00	-10.17
Mid	2437	19.93	19.93	30.00	-10.07
High	2462	19.72	19.72	30.00	-10.28
Worst			19.93		

9.4.1. PLOTS


802.11b OUTPUT POWER, Chain 0

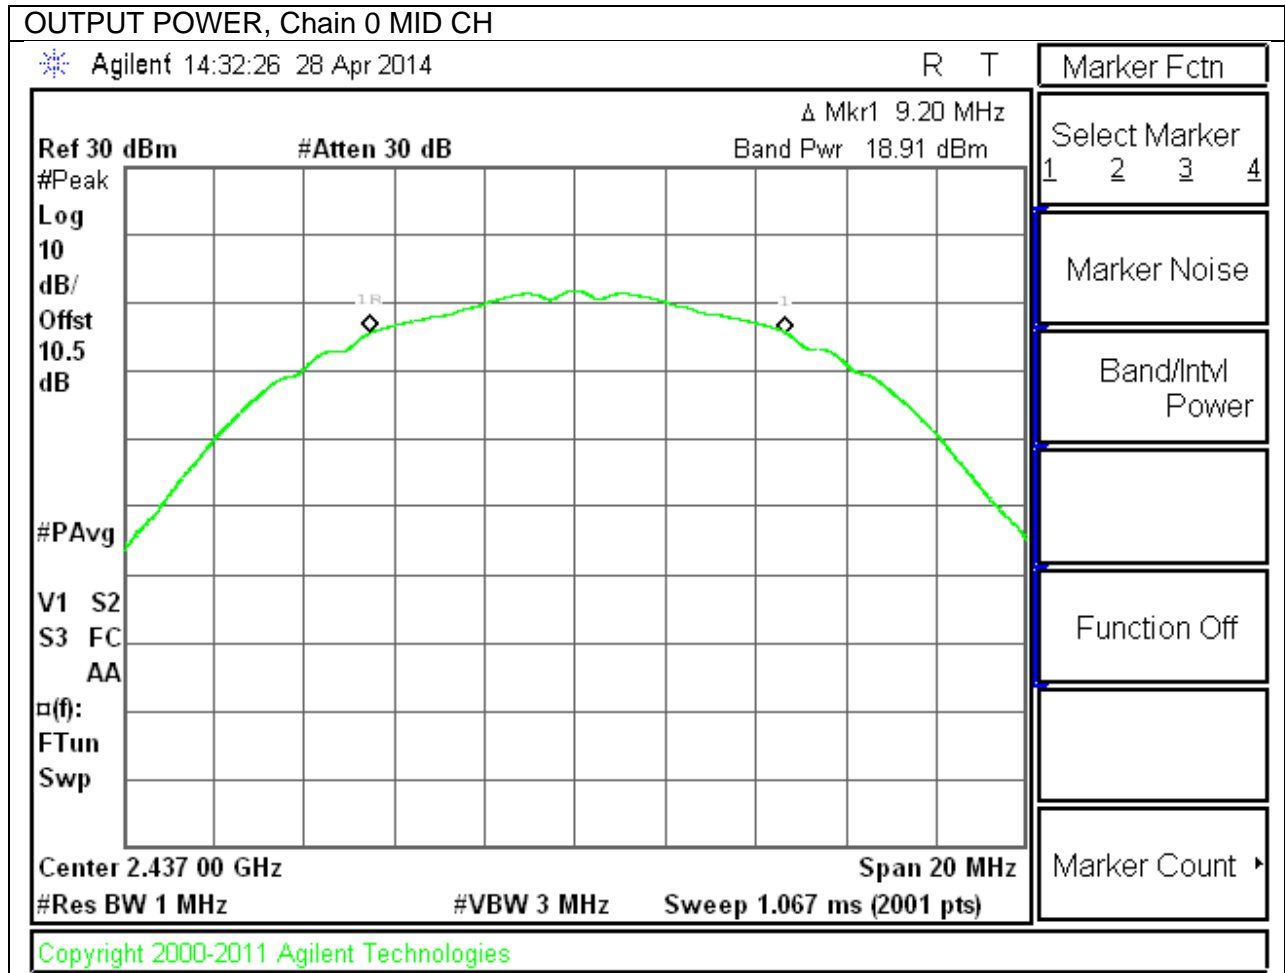

802.11g OUTPUT POWER, Chain 0

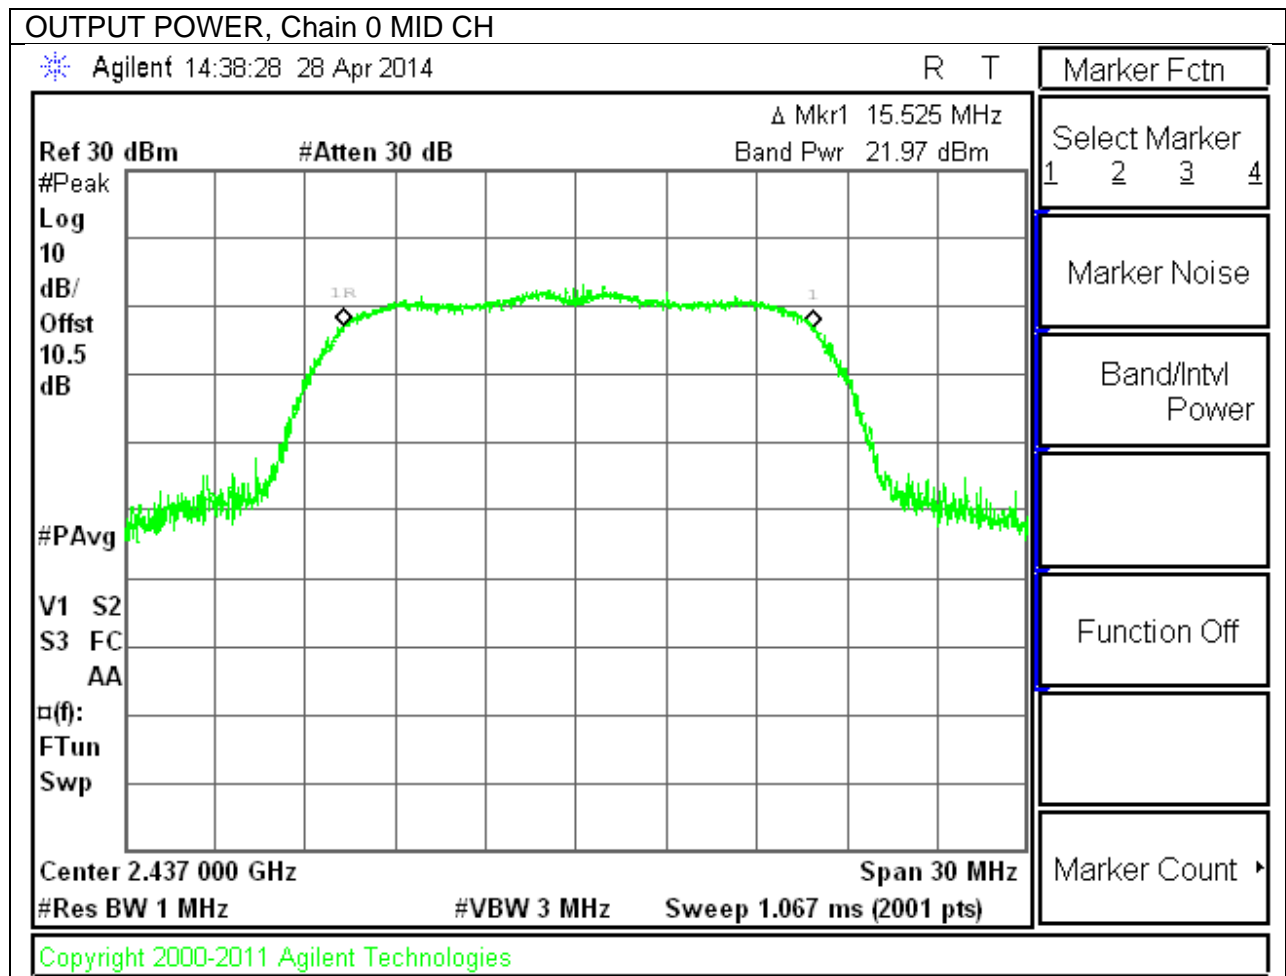

802.11n OUTPUT POWER, Chain 0

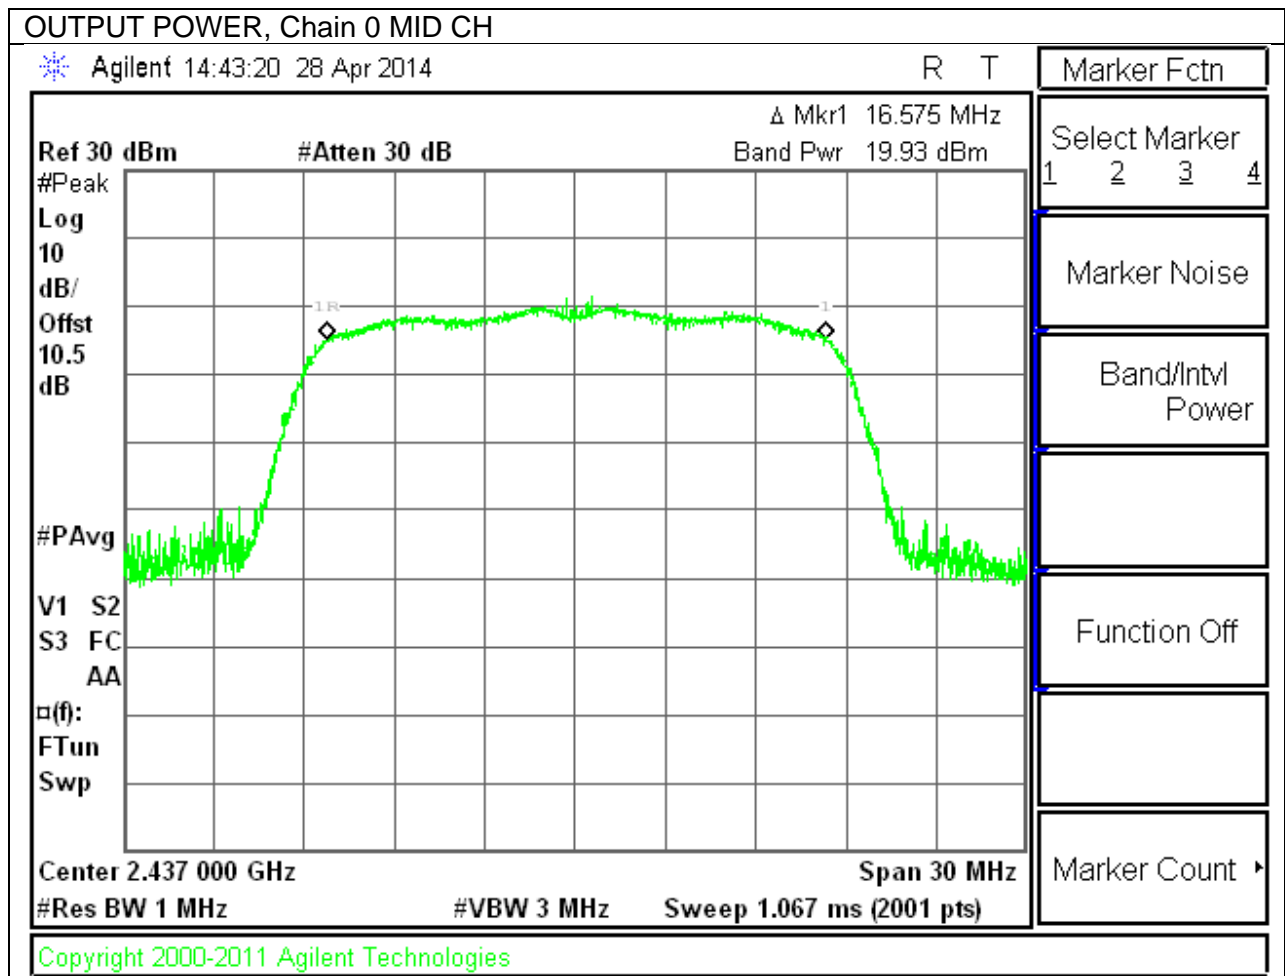

9.5. PSD

LIMITS

FCC §15.247

IC RSS-210 A8.2

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

RESULTS

9.5.1. 802.11b MODE IN THE 2.4 GHz BAND

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.12	8.0	-13.1
Mid	2437	-5.86	8.0	-13.9
High	2462	-5.56	8.0	-13.6

9.5.2. 802.11g MODE IN THE 2.4 GHz BAND

PSD Results

Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-10.47	8.0	-18.5
Mid	2437	-9.31	8.0	-17.3
High	2462	-9.73	8.0	-17.7


9.5.3. 802.11n HT20 MODE IN THE 2.4 GHz BAND

PSD Results


Channel	Frequency (MHz)	Chain 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-11.99	8.0	-20.0
Mid	2437	-12.01	8.0	-20.0
High	2462	-9.55	8.0	-17.6

9.5.1. PLOTS


802.11b PSD, Chain 0

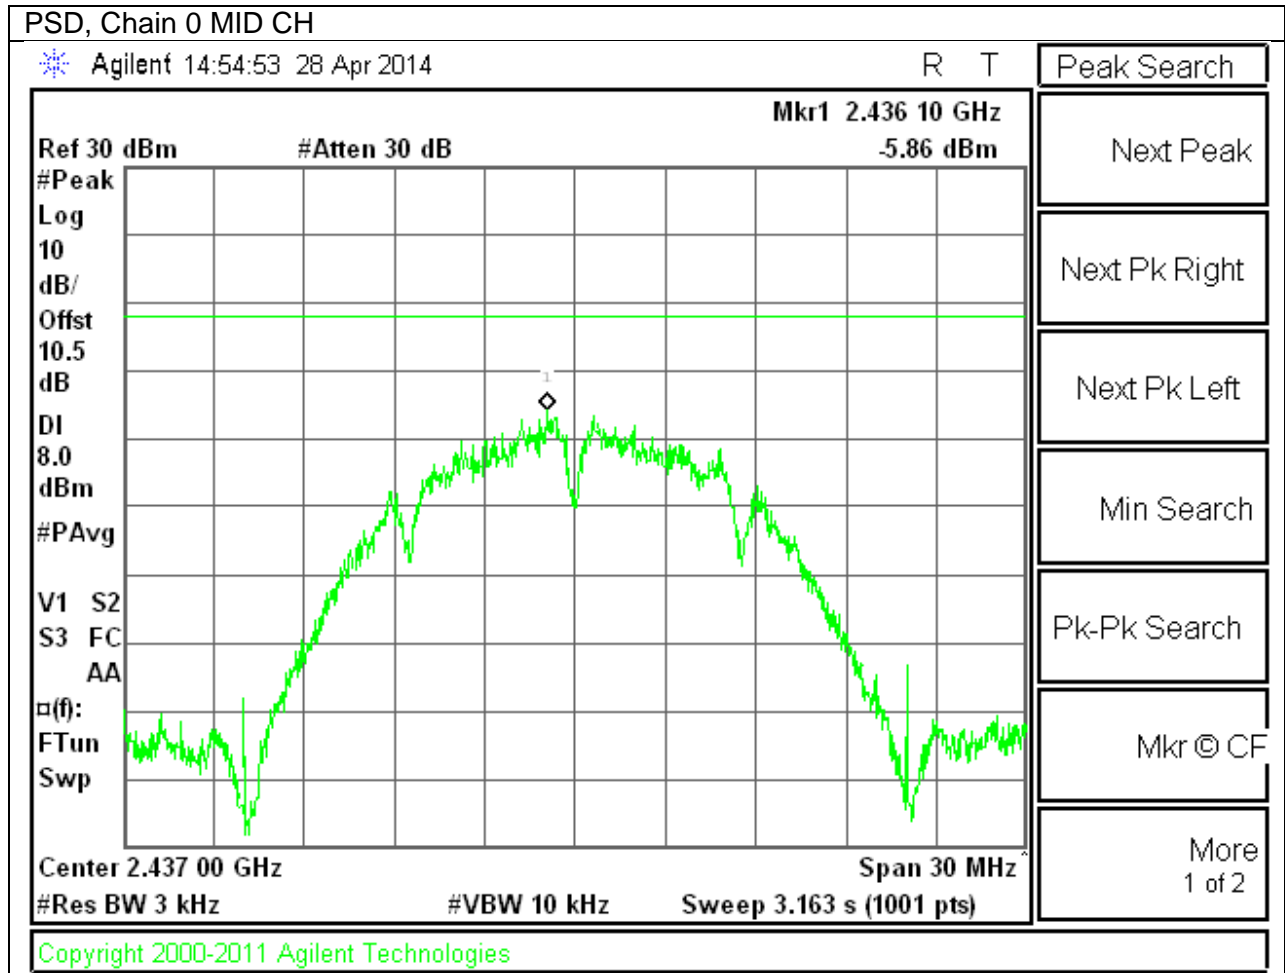

802.11g PSD, Chain 0

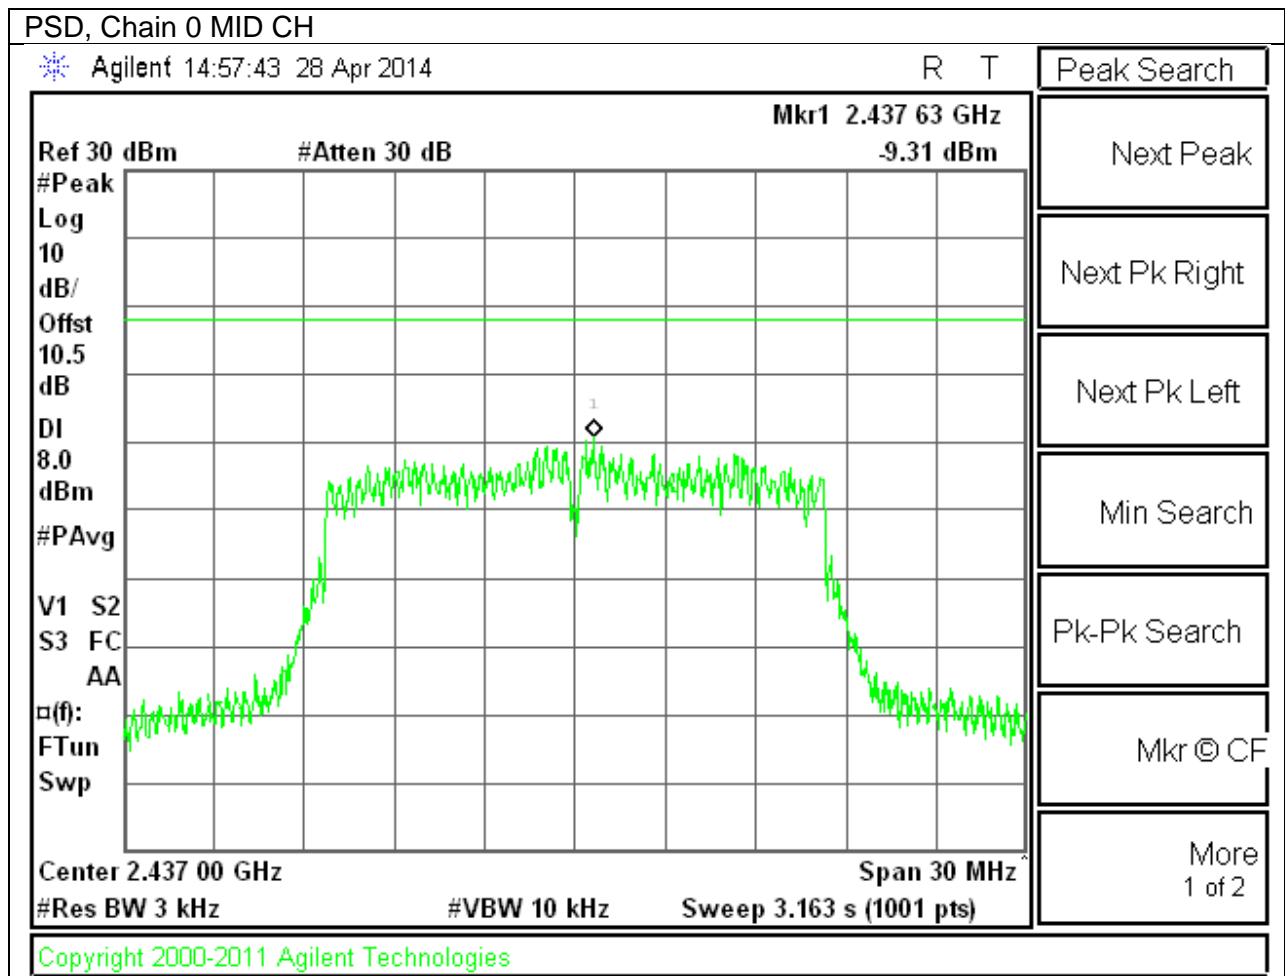

802.11n PSD, Chain 0

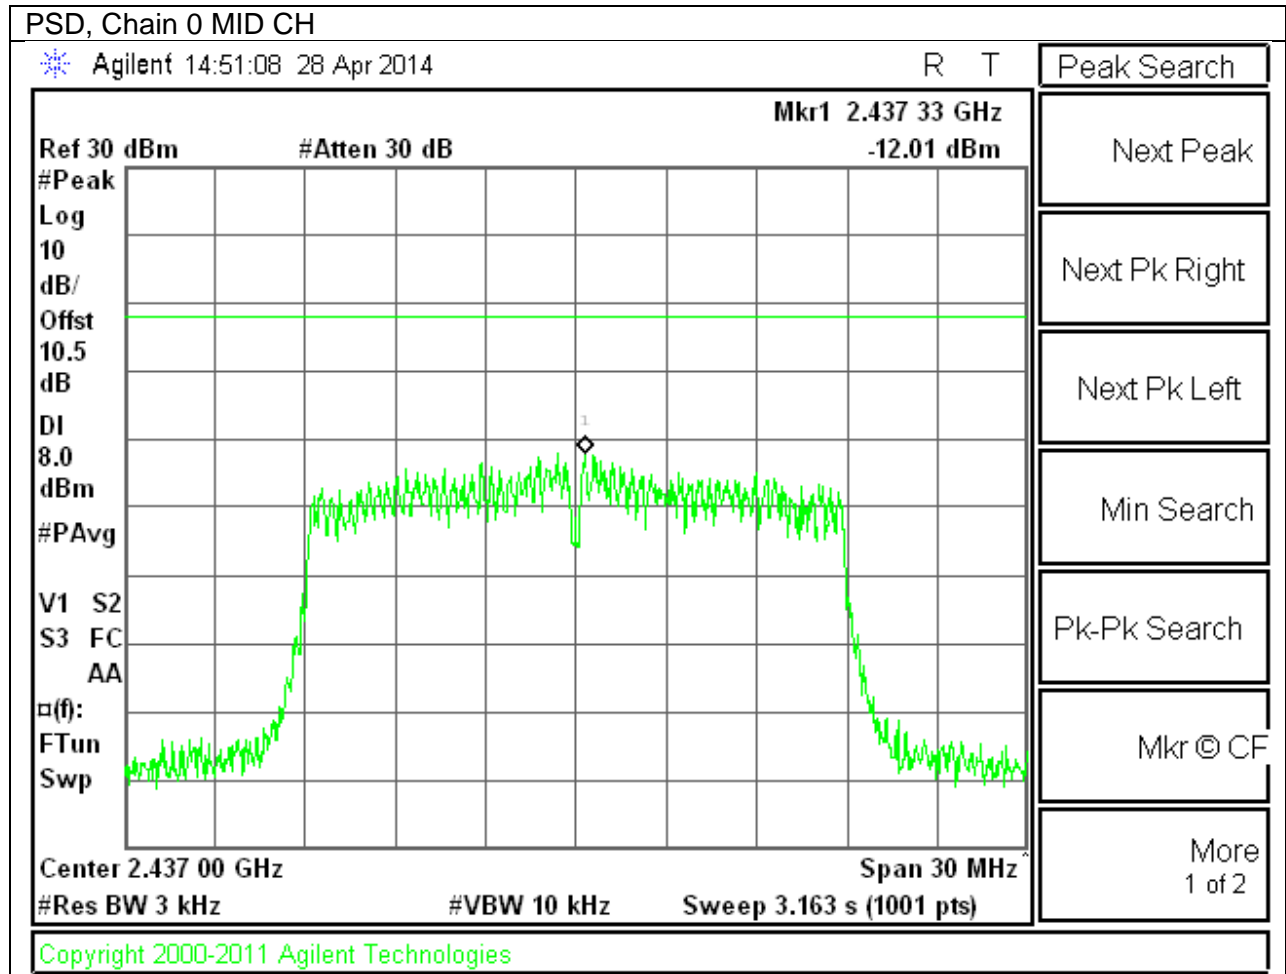

9.6. OUT-OF-BAND EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer with RBW = 100 kHz, VBW = 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, bandedge (where measurements to the general radiated limits will not be made) and out-of-band emissions.


RESULTS

9.6.1. 802.11b MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

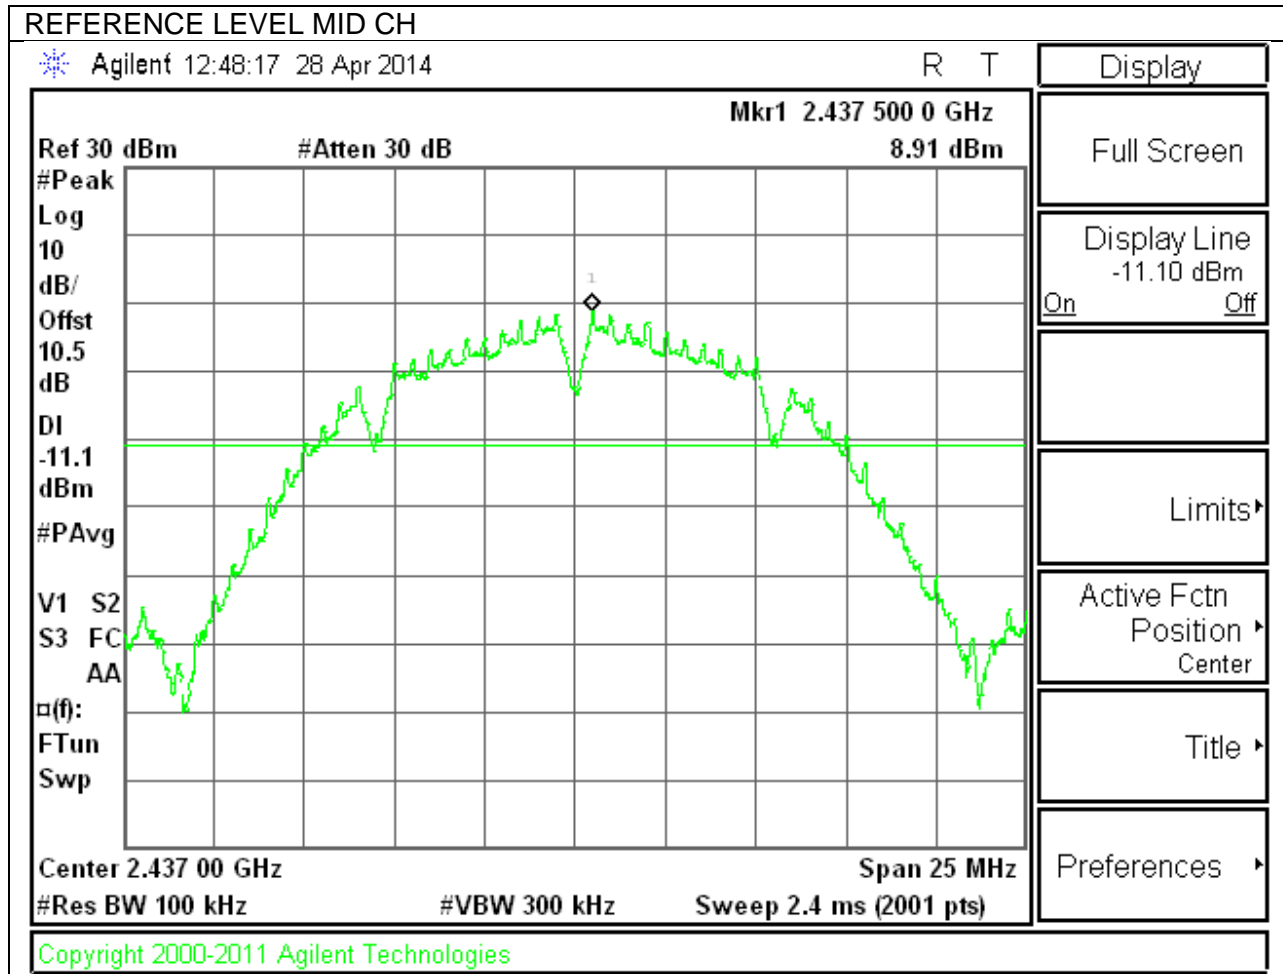


LOW CHANNEL BANDEDGE

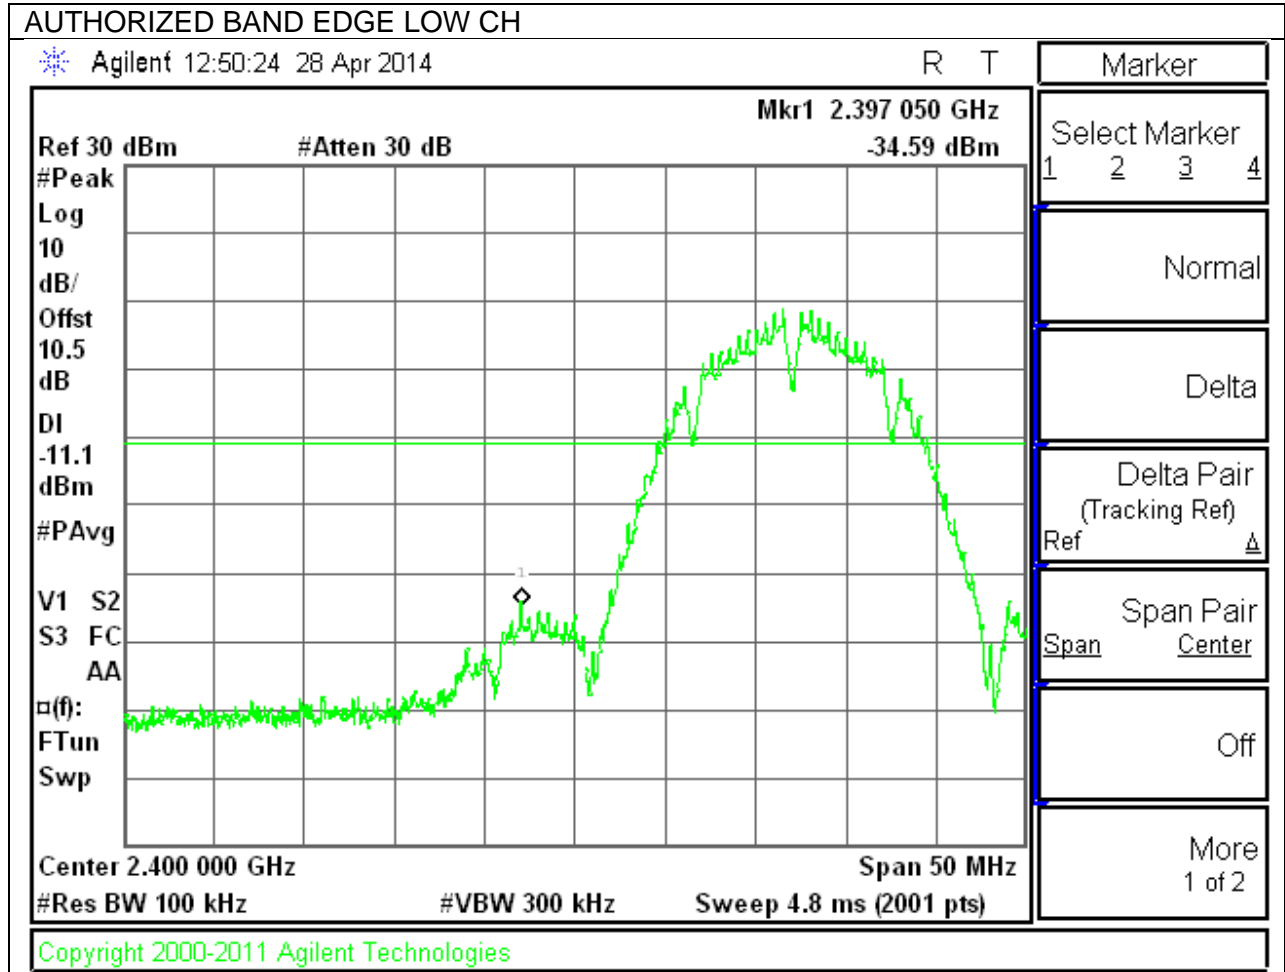


HIGH CHANNEL BANDEDGE

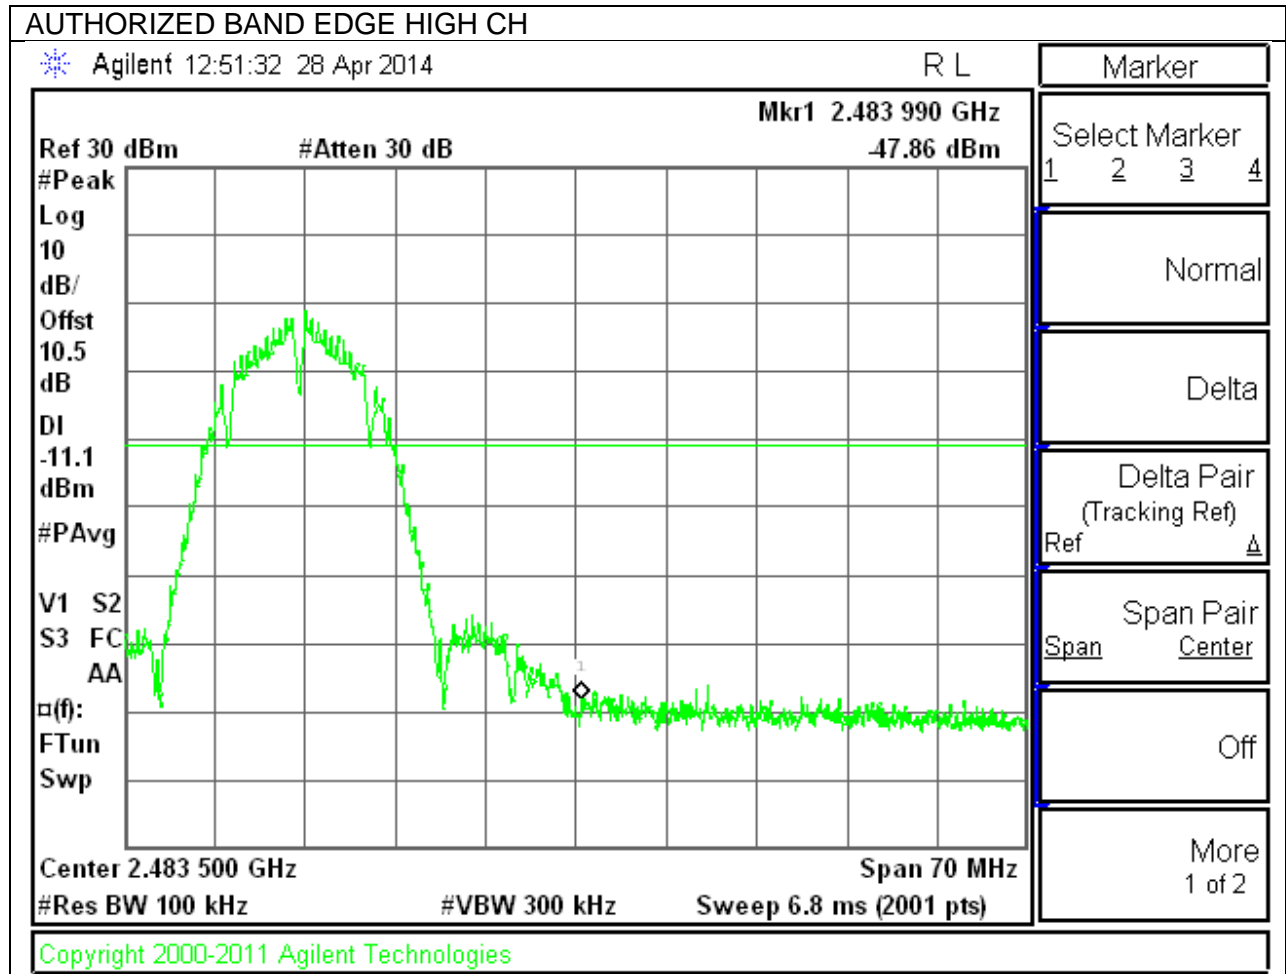

OUT-OF-BAND EMISSIONS

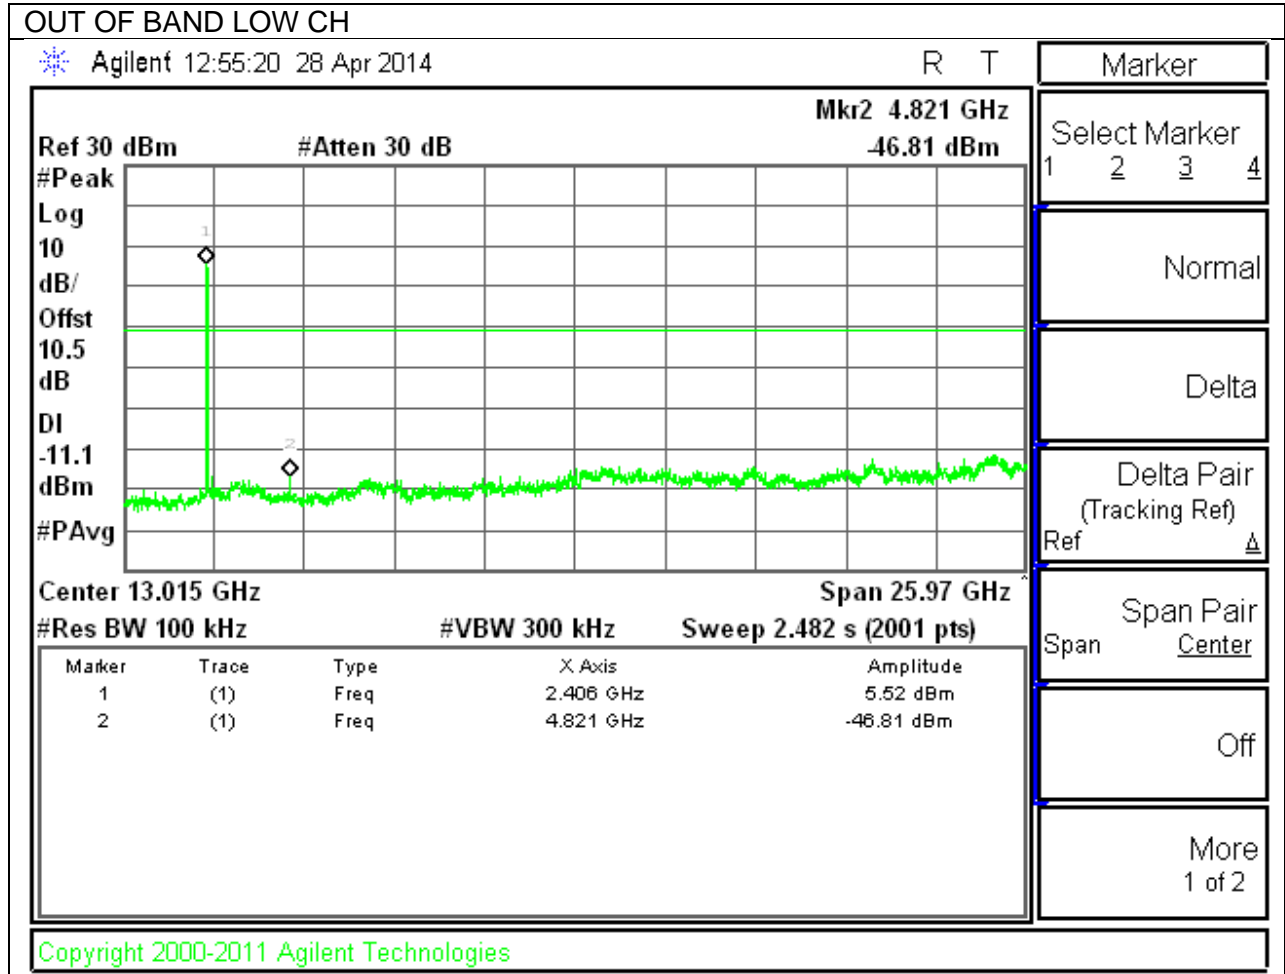

OUT OF BAND MID CH

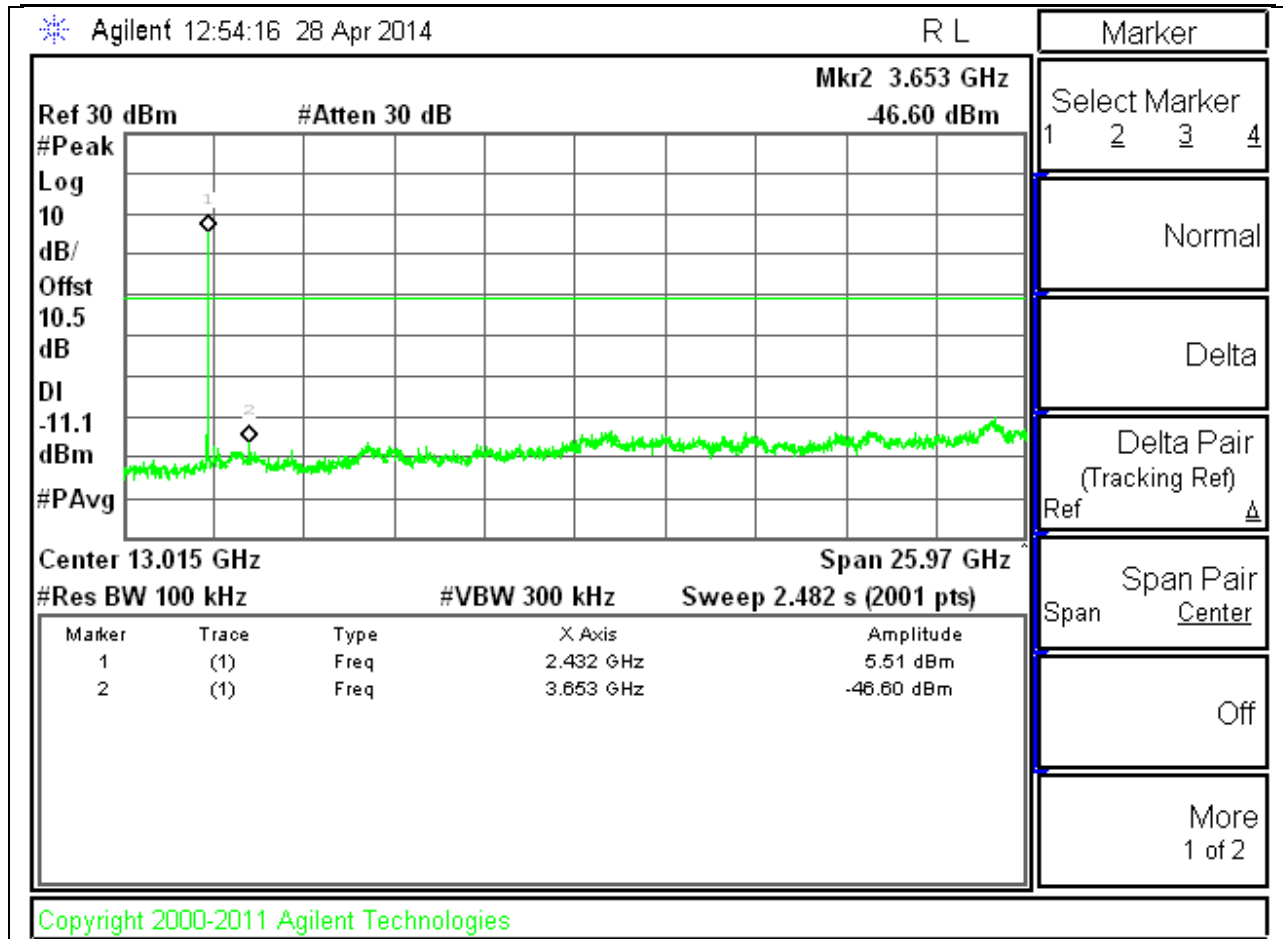

OUT OF BAND HIGH CH

Agilent 12:53:11 28 Apr 2014

R T

Marker

Ref 30 dBm

#Atten 30 dB

Mkr2 7.081 GHz

-46.18 dBm

#Peak

Log

10

dB/

Offst

10.5


dB

DI

-11.1

dBm

#PAvg

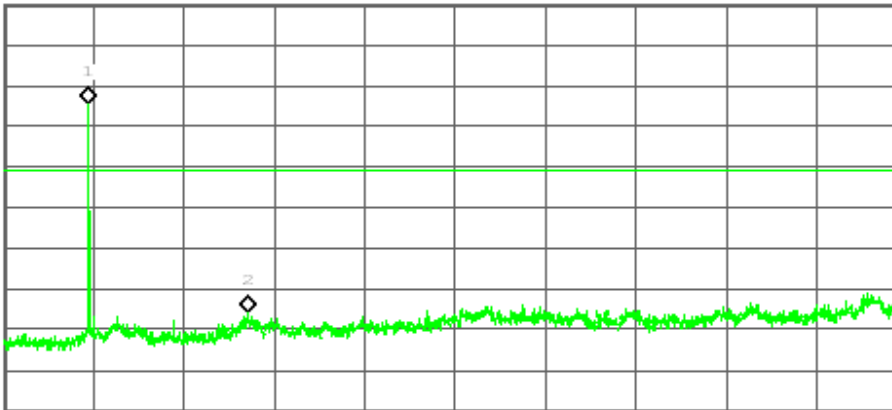

Center 13.015 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 300 kHz

Sweep 2.482 s (2001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.468 GHz	5.38 dBm
2	(1)	Freq	7.081 GHz	-46.18 dBm

Select Marker
1 2 3 4

Marker Trace
Auto 1 2 3

Readout
Frequency

Marker Table
On Off


Marker All Off

More
2 of 2


Copyright 2000-2011 Agilent Technologies

9.6.2. 802.11g MODE IN THE 2.4 GHz BAND

IN-BAND REFERENCE LEVEL

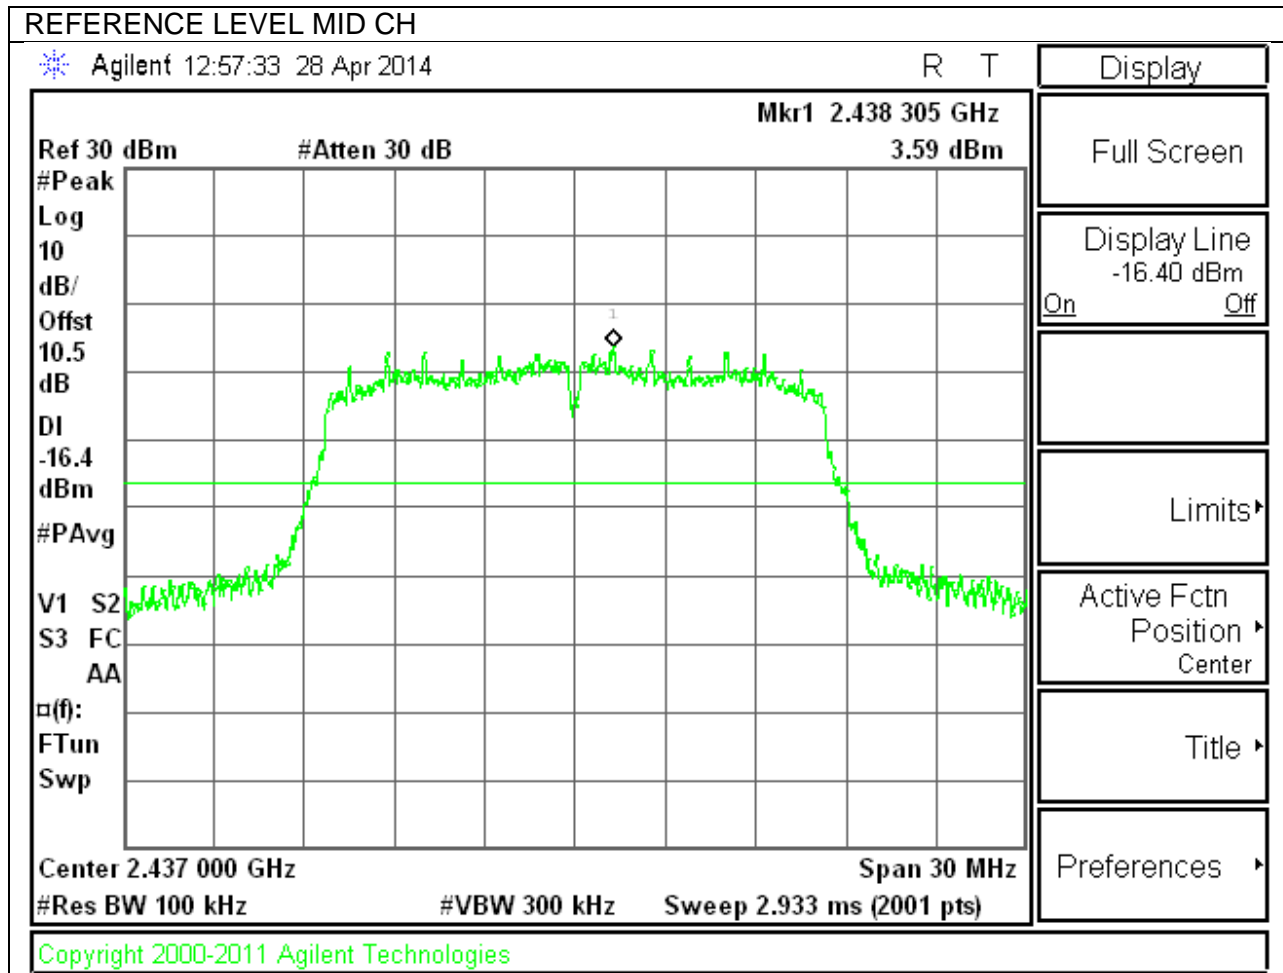


LOW CHANNEL BANDEDGE

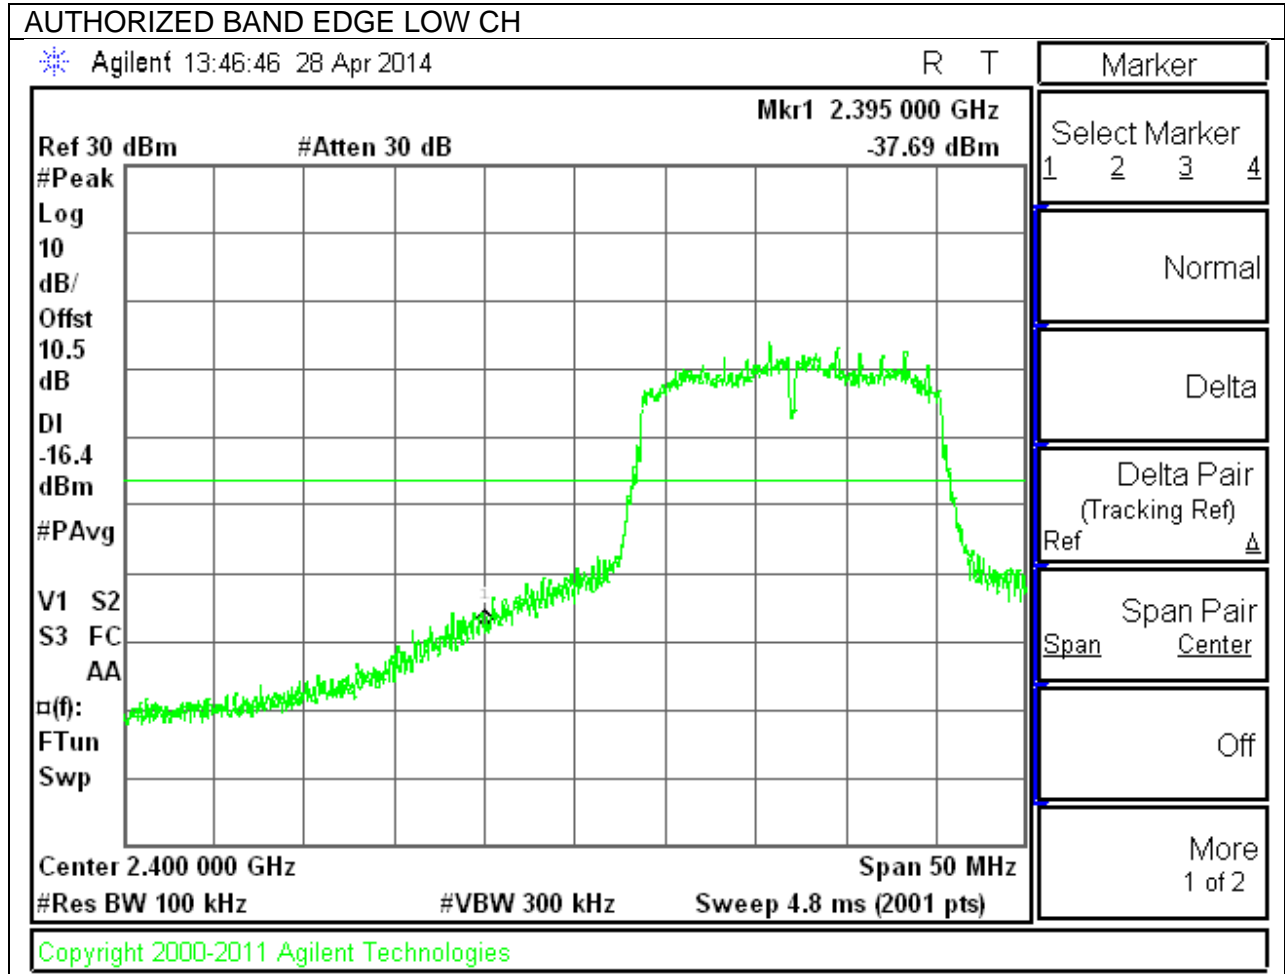


HIGH CHANNEL BANDEDGE


AUTHORIZED BAND EDGE HIGH CH

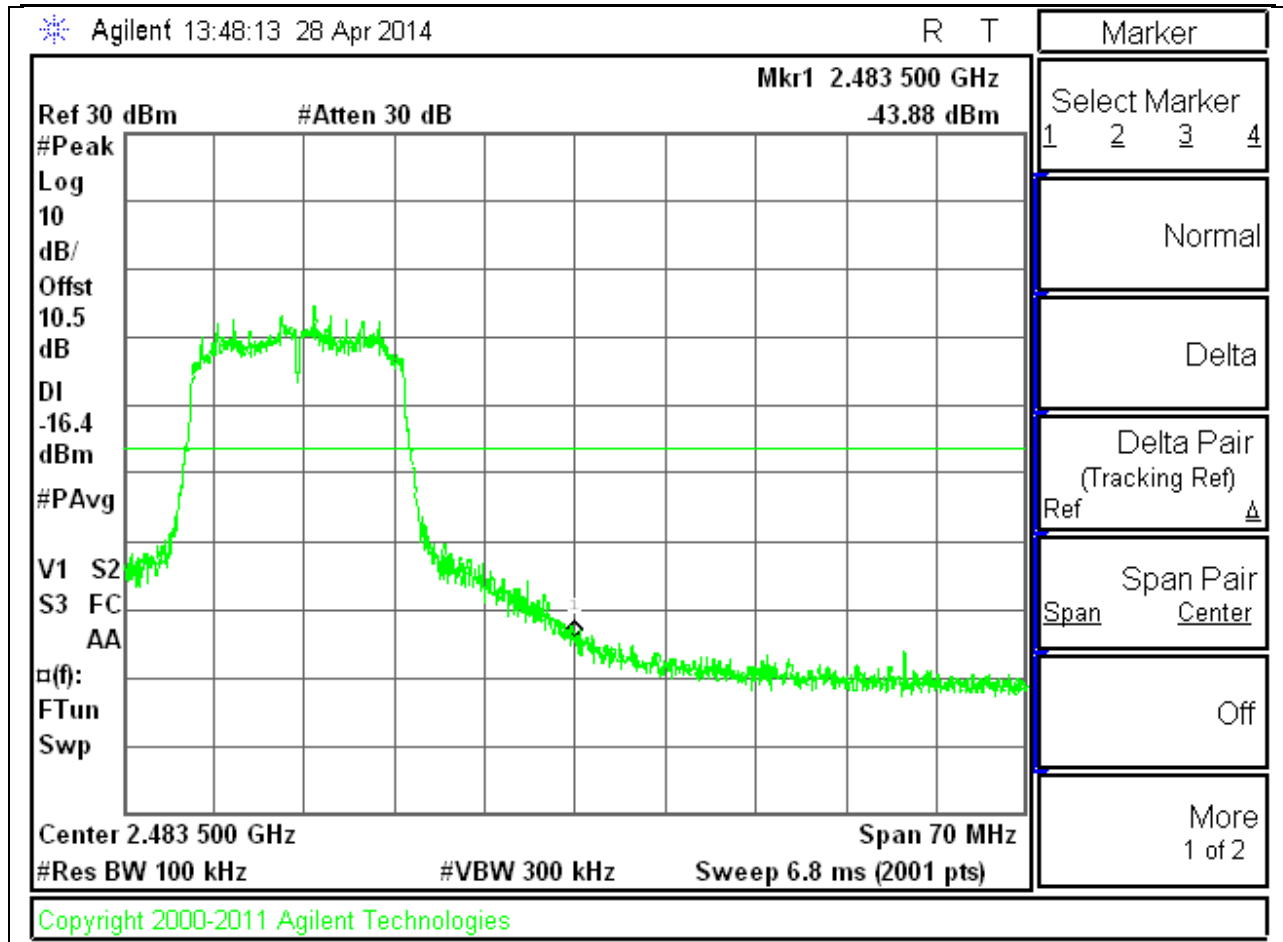


OUT-OF-BAND EMISSIONS

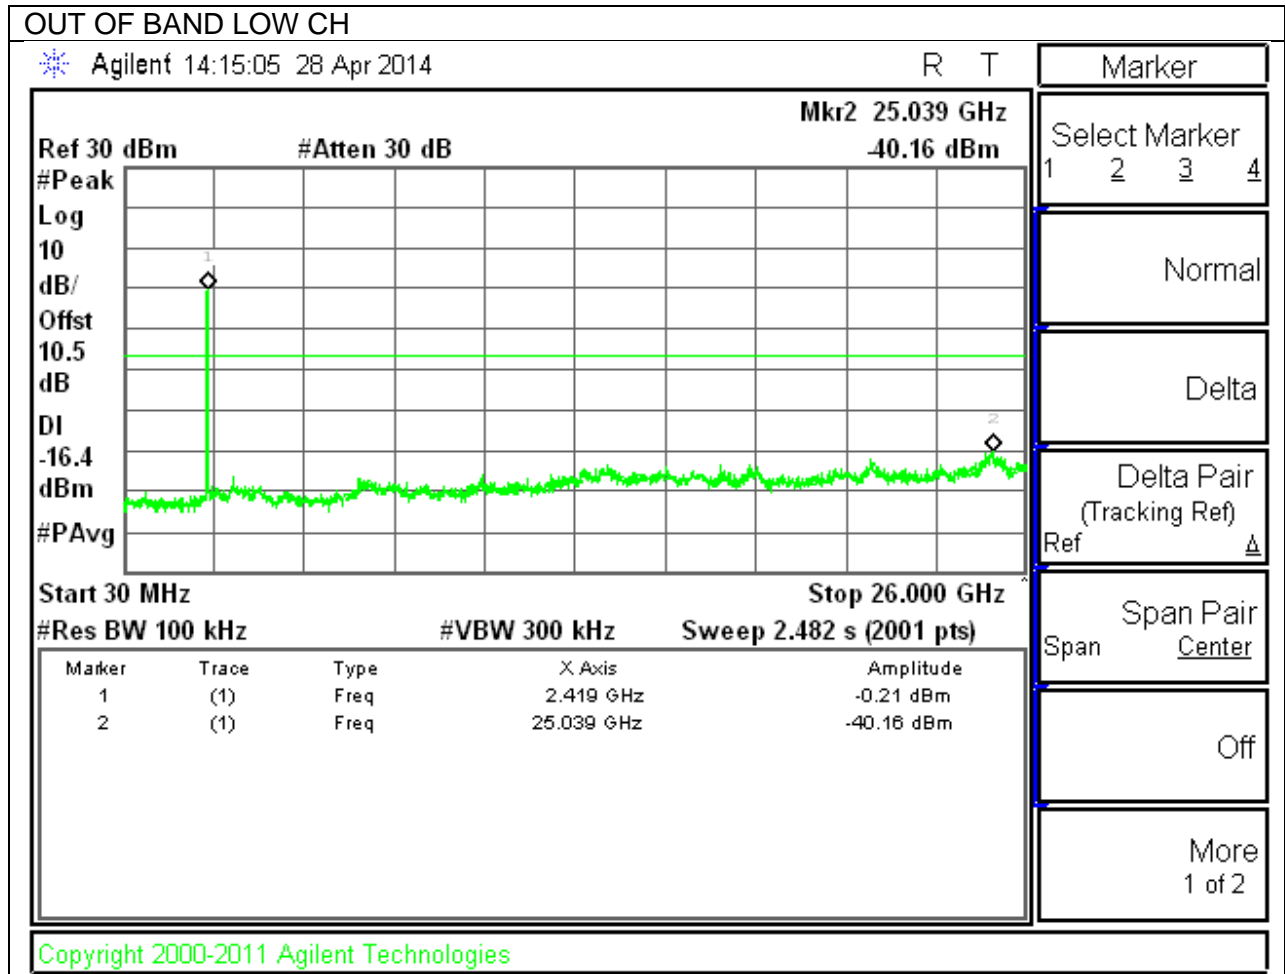


OUT OF BAND MID CH

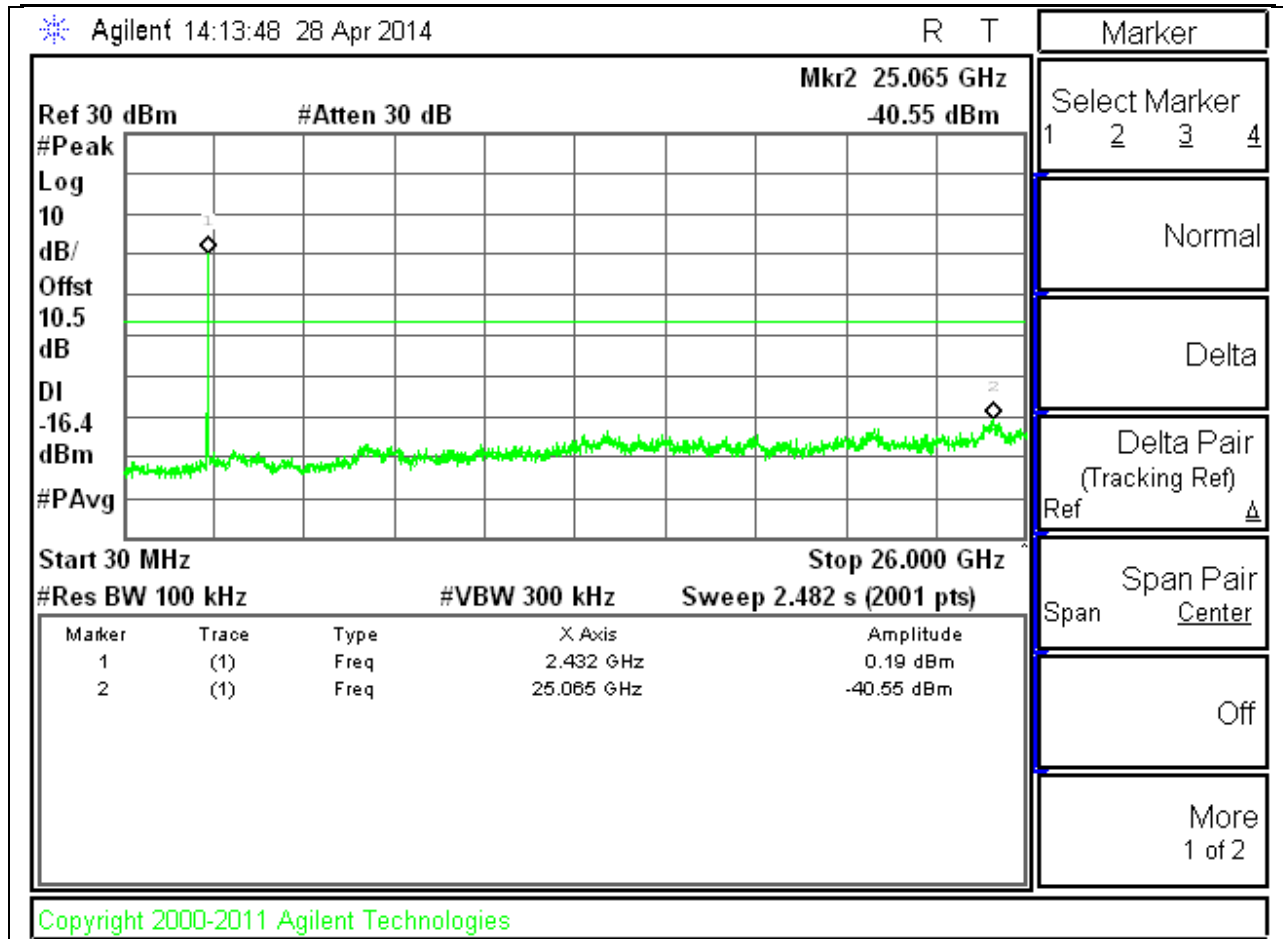

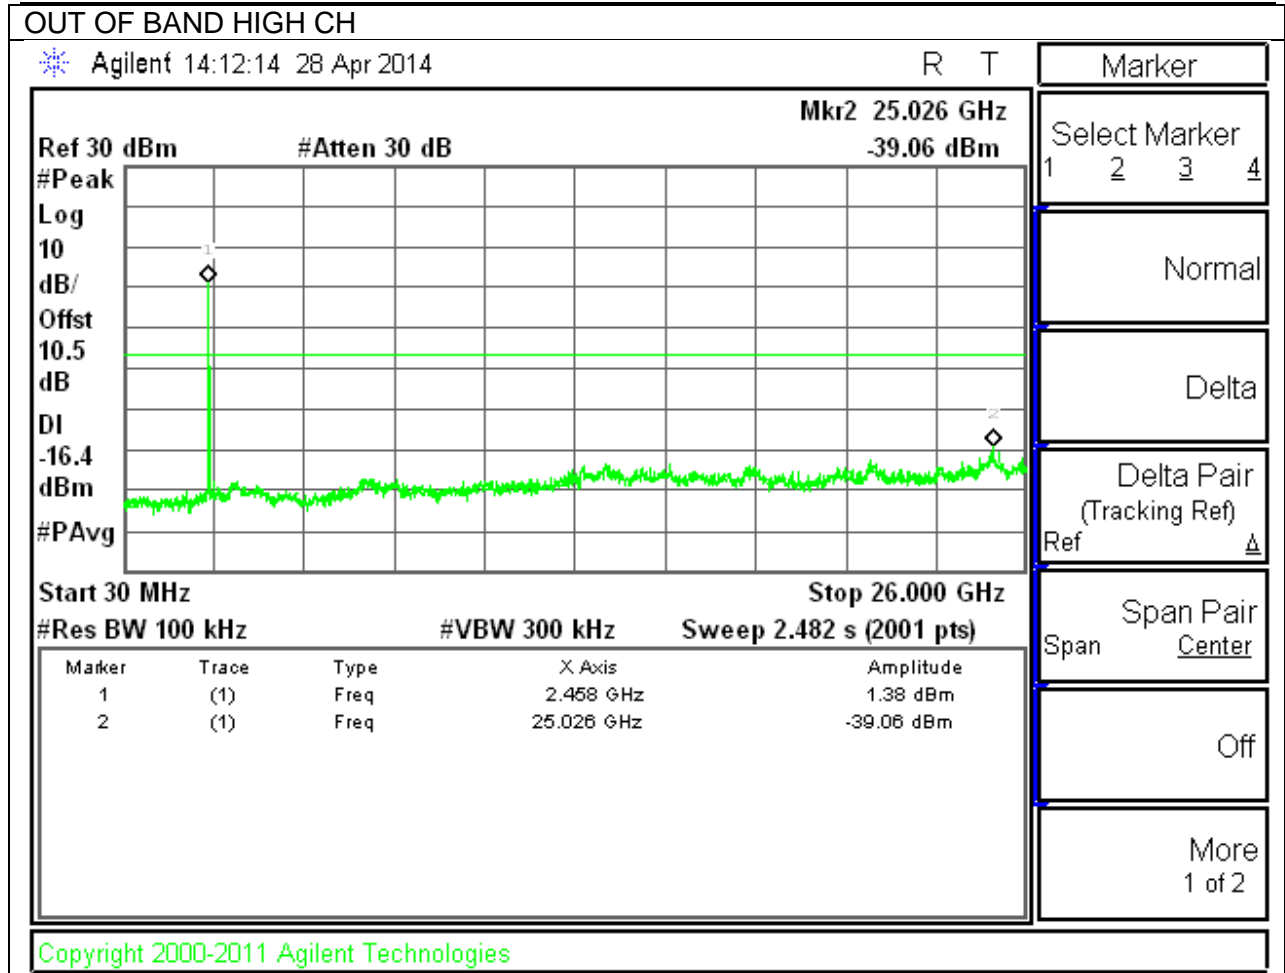


9.6.3. 802.11n MODE IN THE 2.4 GHz BAND


IN-BAND REFERENCE LEVEL

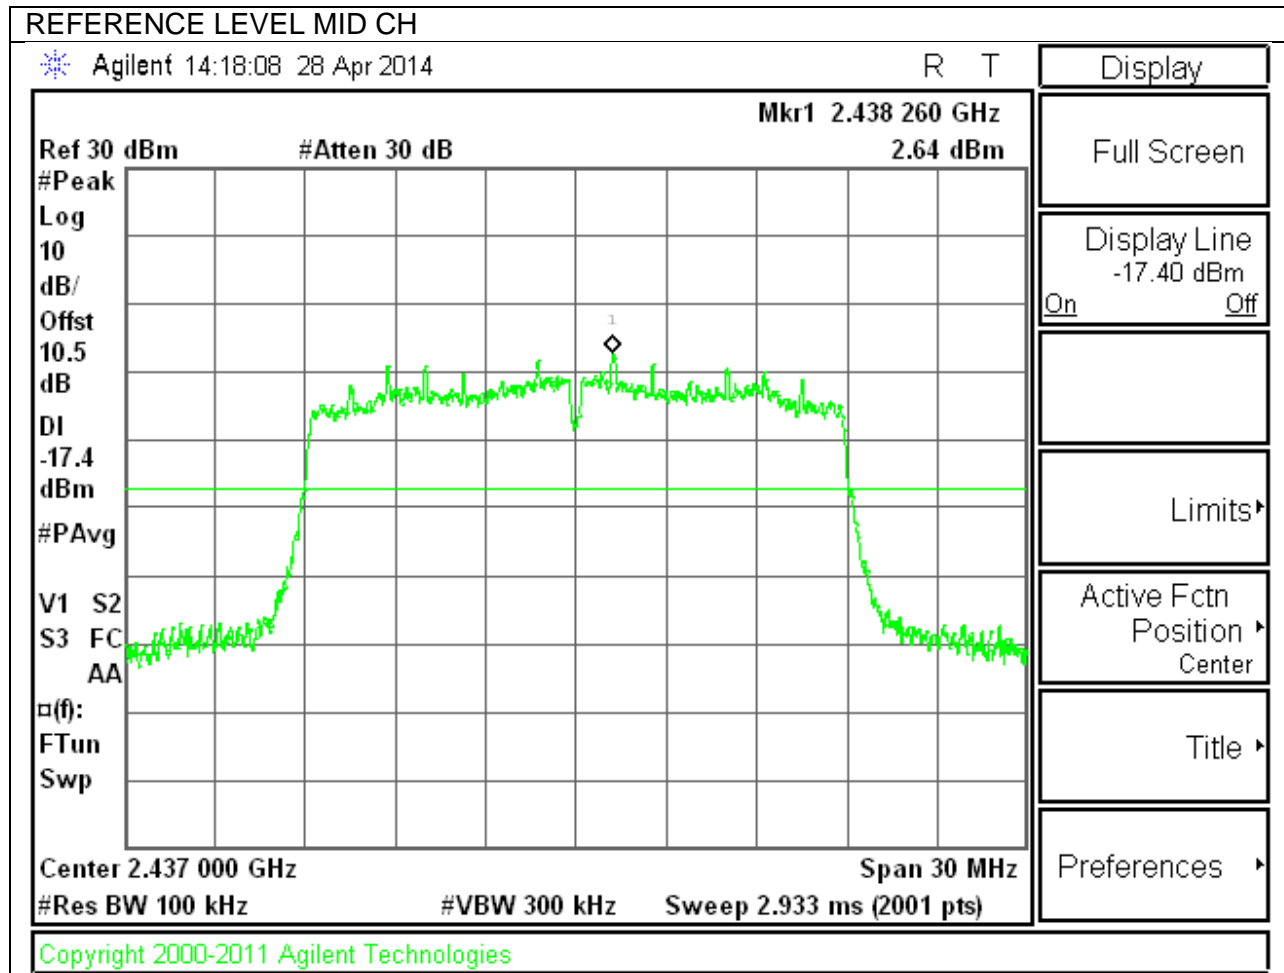


LOW CHANNEL BANDEDGE

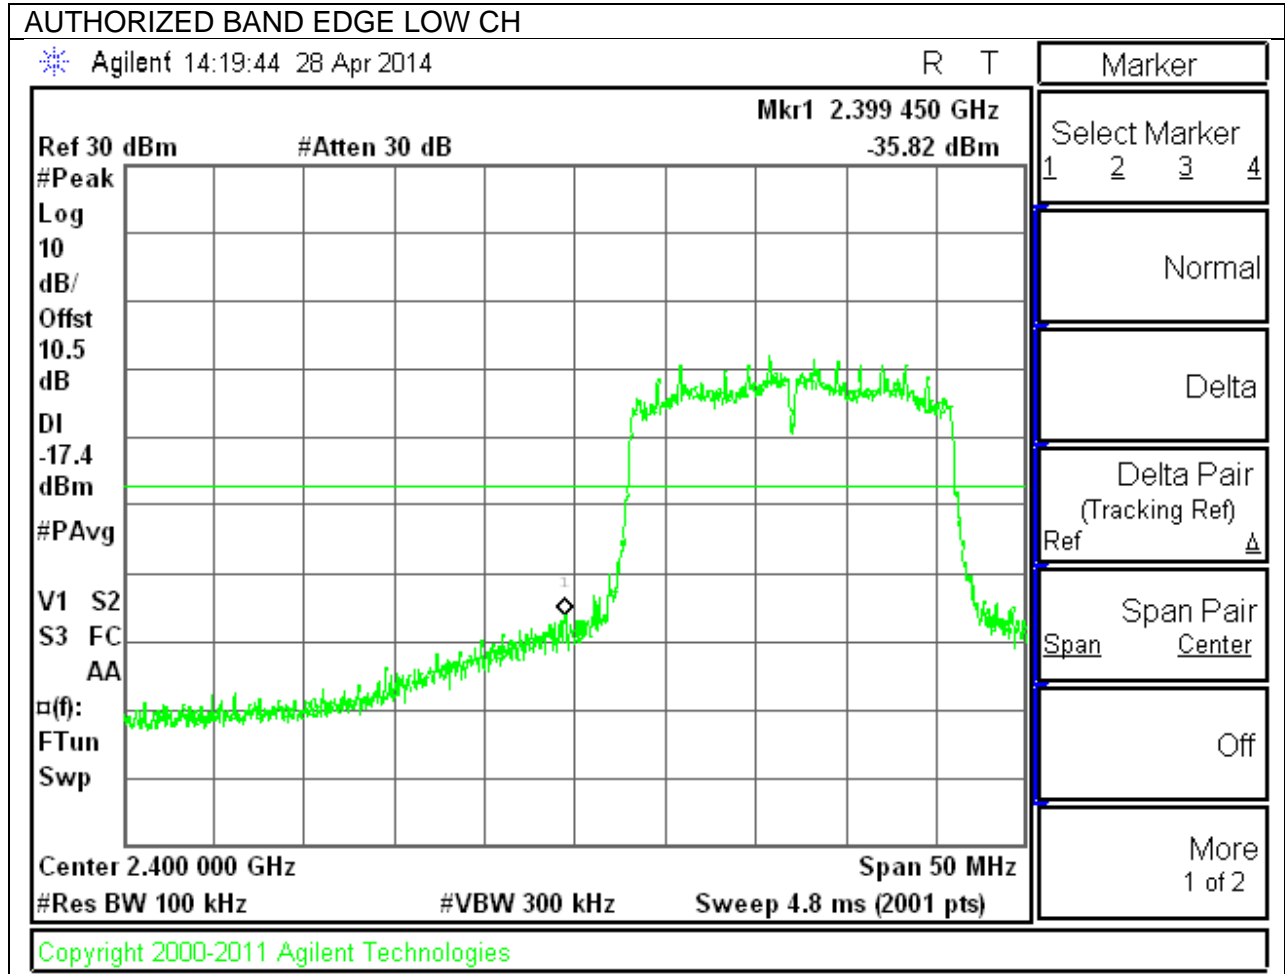


HIGH CHANNEL BANDEDGE

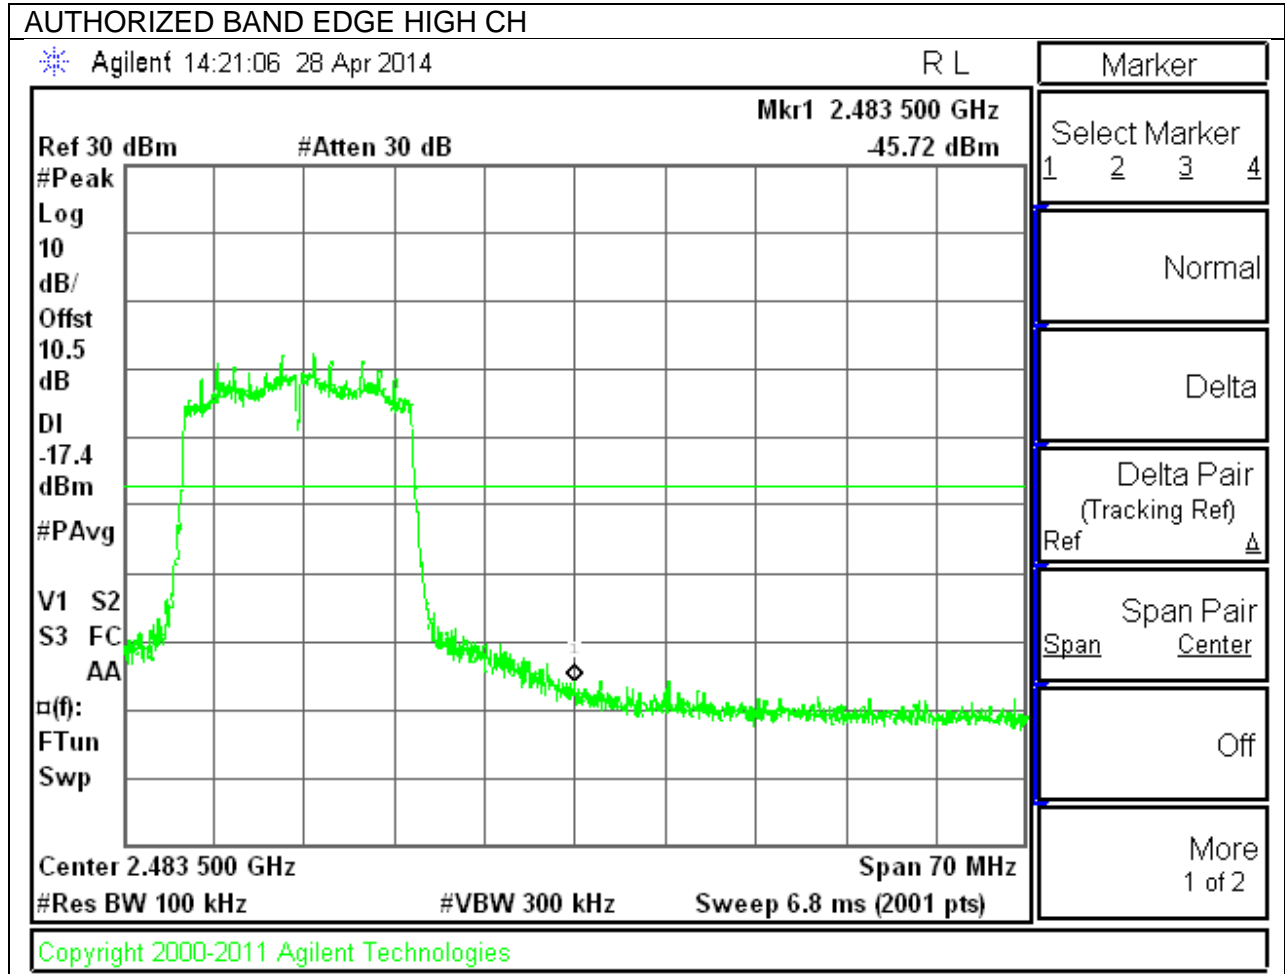


OUT-OF-BAND EMISSIONS

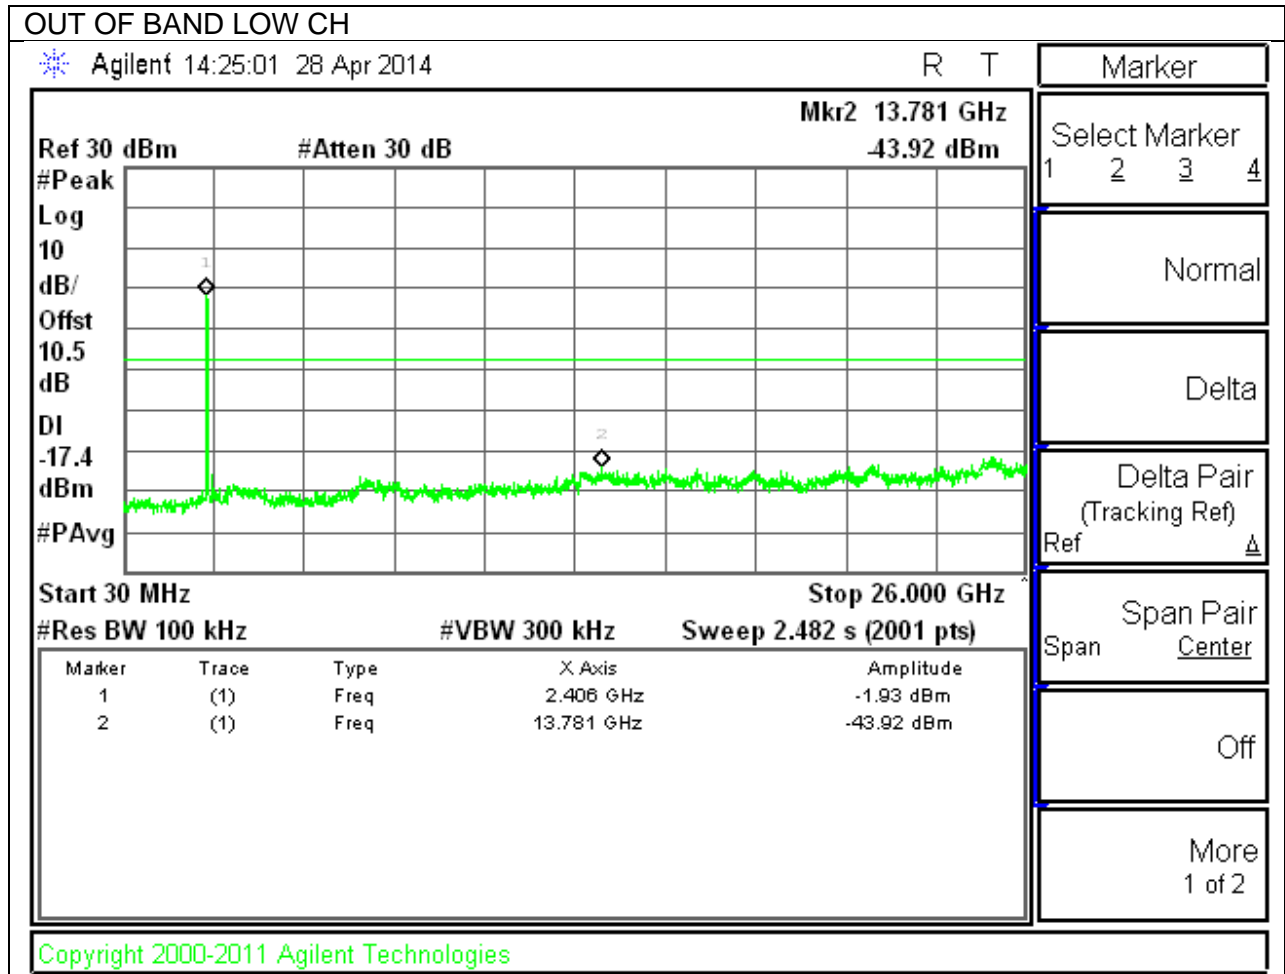

OUT OF BAND MID CH

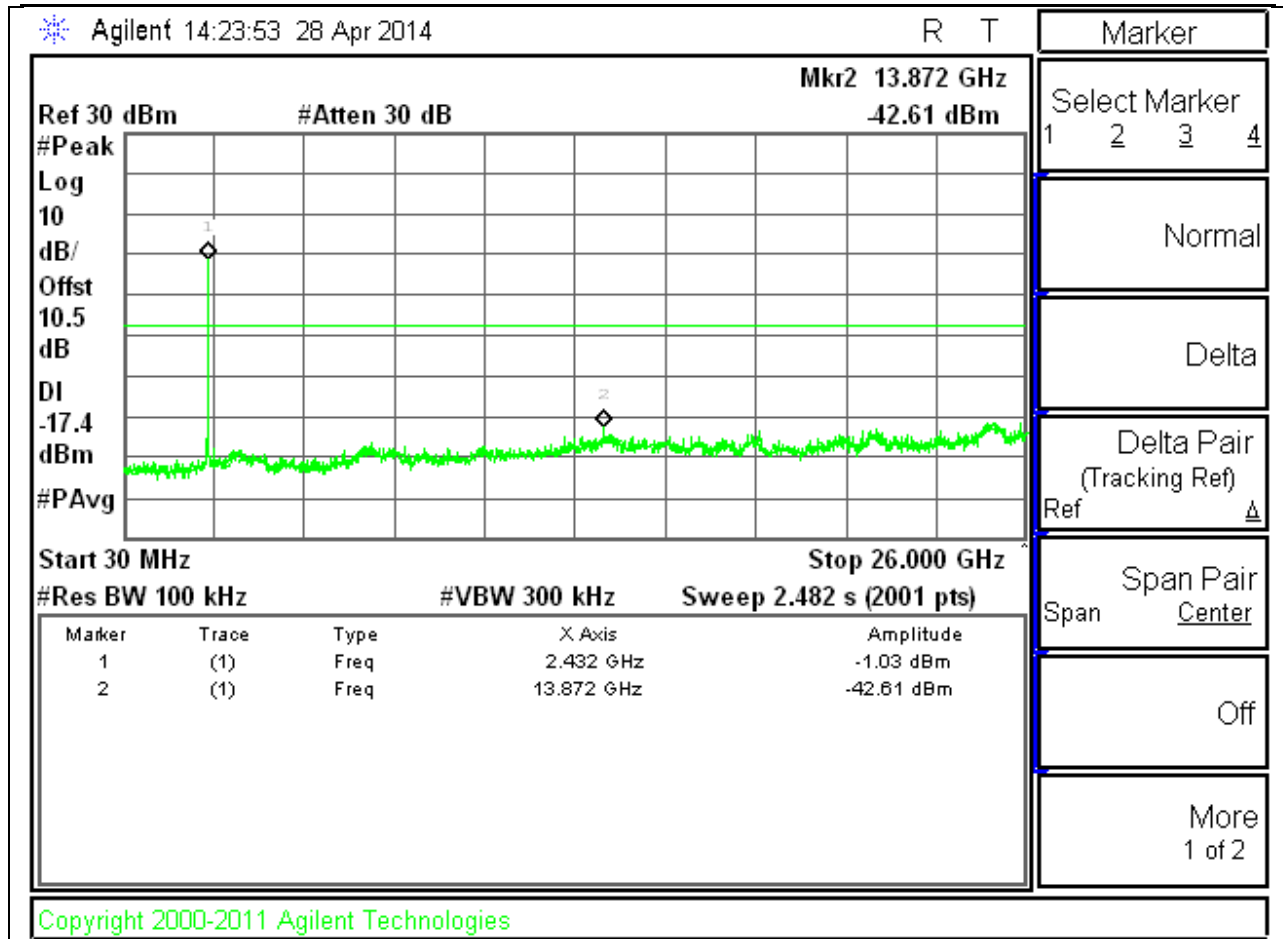

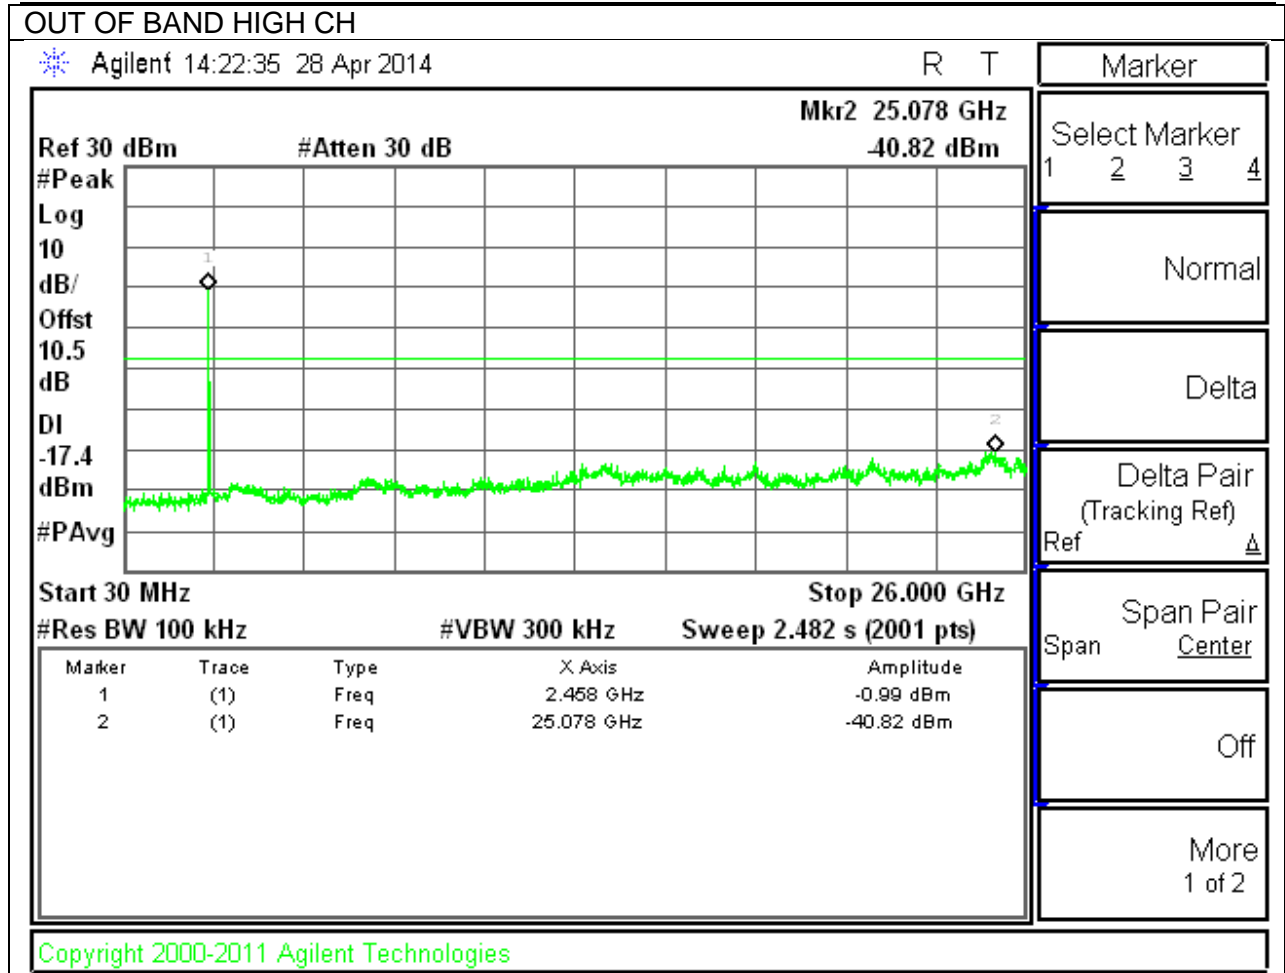

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor= $10\log(1/x)$ For this sample B mode = 0dB (duty cycle >98%); G mode = 0.3dB; N mode = 0.32dB.


For spurious emission measurement traditional method of reduce VBW is followed.

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. TX ABOVE 1 GHz 802.11b MODE IN THE 2.4 GHz BAND RESTRICTED BANDEDGE (LOW CHANNEL)

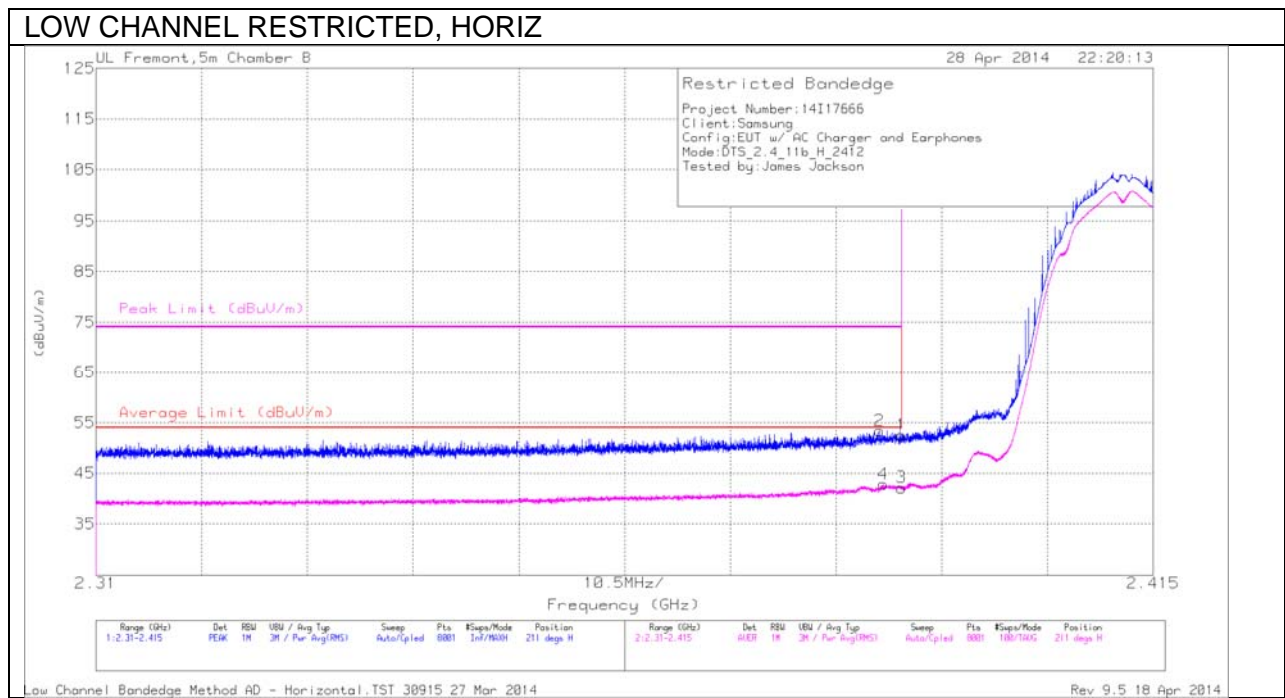

LOW CHANNEL RESTRICTED, DATA, HORIZ

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.33	PK	32.1	-22.9	52.53	-	-	74	-21.47	211	236	H
2	* 2.388	44.2	PK	32.1	-22.9	53.4	-	-	74	-20.6	211	236	H
3	* 2.39	32.96	RMS	32.1	-22.9	42.16	54	-11.84	-	-	211	236	H
4	* 2.388	33.65	RMS	32.1	-22.9	42.85	54	-11.15	-	-	211	236	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

LOW CHANNEL RESTRICTED, VERT

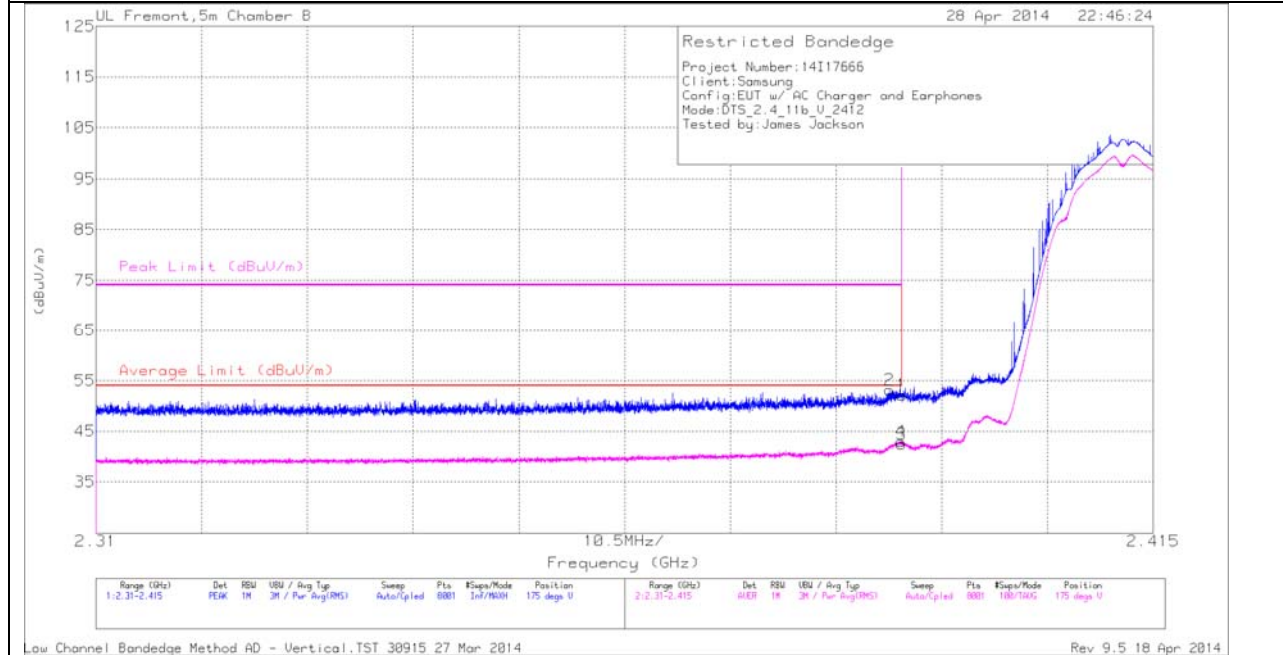

LOW CHANNEL RESTRICTED DATA, VERT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.97	PK	32.1	-22.9	52.17	-	-	74	-21.83	175	365	V
2	* 2.389	43.93	PK	32.1	-22.9	53.13	-	-	74	-20.87	175	365	V
3	* 2.39	33.25	RMS	32.1	-22.9	42.45	54	-11.55	-	-	175	365	V
4	* 2.39	33.75	RMS	32.1	-22.9	42.95	54	-11.05	-	-	175	365	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

AUTHORIZED BANDEDGE (HIGH CHANNEL)

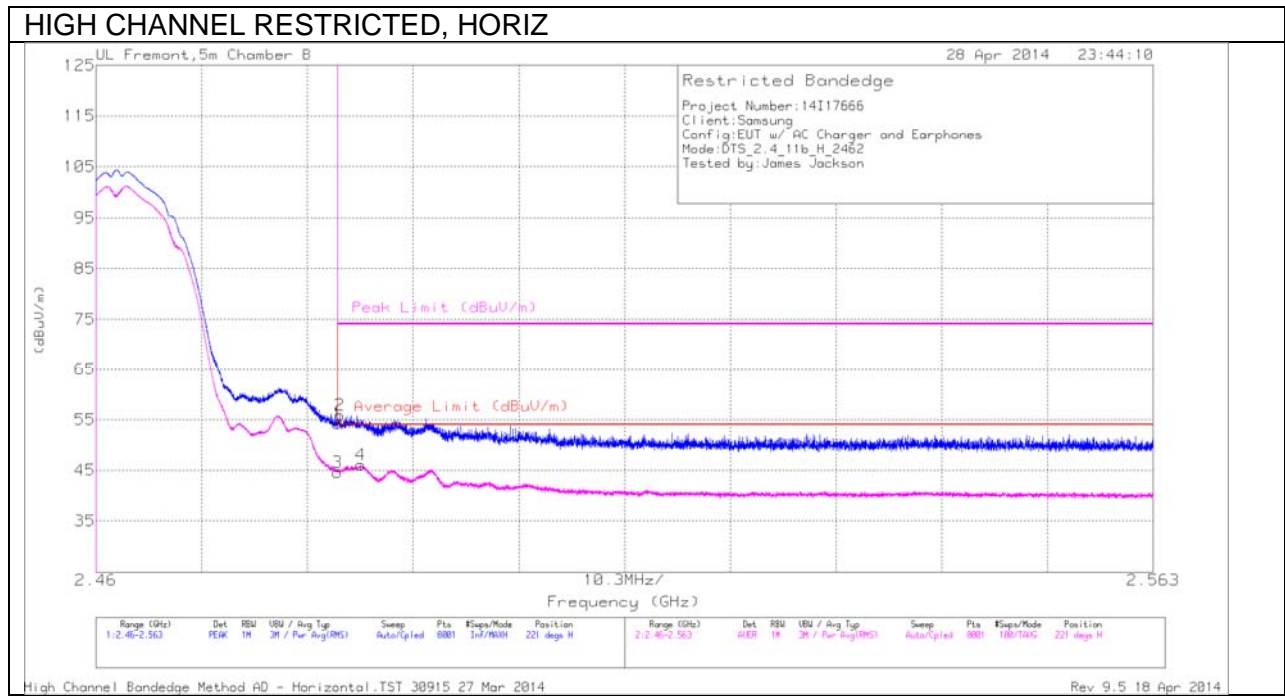

HIGH CHANNEL RESTRICTED, DATA, HORIZ


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	44.41	PK	32.4	-22.6	54.21	-	-	74	-19.79	221	282	H
2	* 2.484	46.11	PK	32.4	-22.6	55.91	-	-	74	-18.09	221	282	H
3	* 2.484	34.79	RMS	32.4	-22.6	44.59	54	-9.41	-	-	221	282	H
4	* 2.486	36.22	RMS	32.4	-22.6	46.02	54	-7.98	-	-	221	282	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

High Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

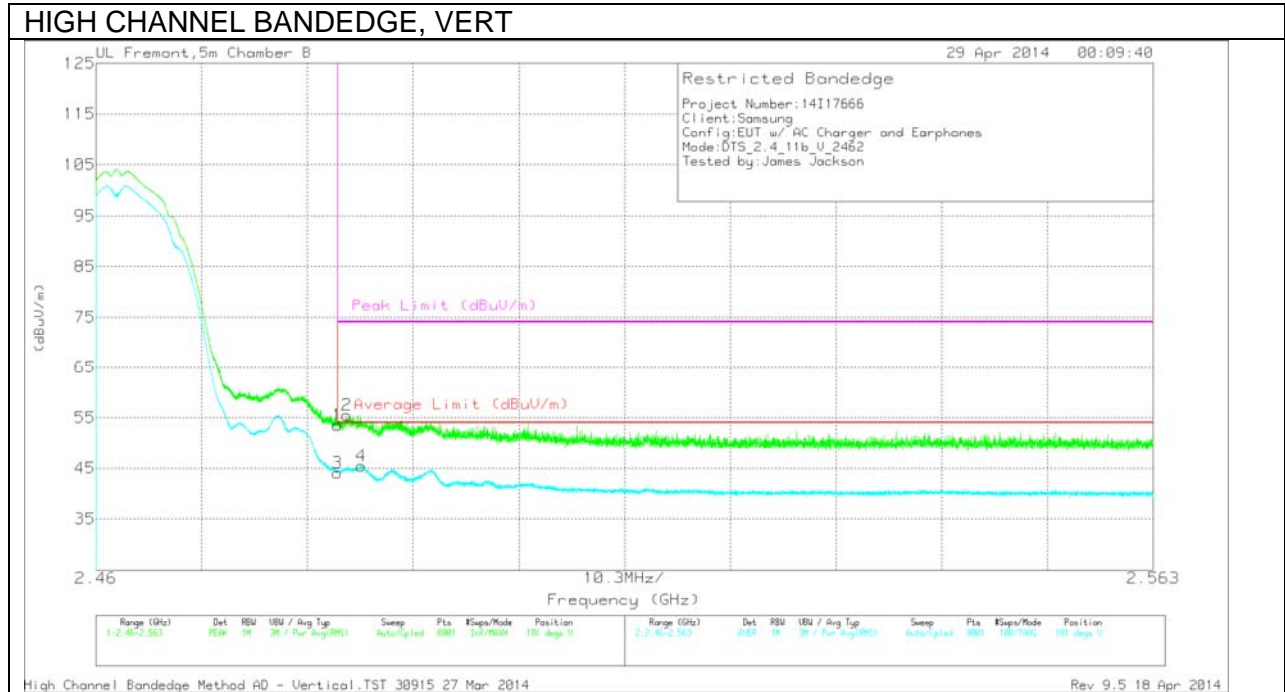

HIGH CHANNEL BANDEDGE, DATA, VERT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.77	PK	32.4	-22.6	53.57	-	-	74	-20.43	181	290	V
2	* 2.484	45.67	PK	32.4	-22.6	55.47	-	-	74	-18.53	181	290	V
3	* 2.484	34.34	RMS	32.4	-22.6	44.14	54	-9.86	-	-	181	290	V
4	* 2.486	35.62	RMS	32.4	-22.6	45.42	54	-8.58	-	-	181	290	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


High Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

HARMONICS AND SPURIOUS EMISSIONS

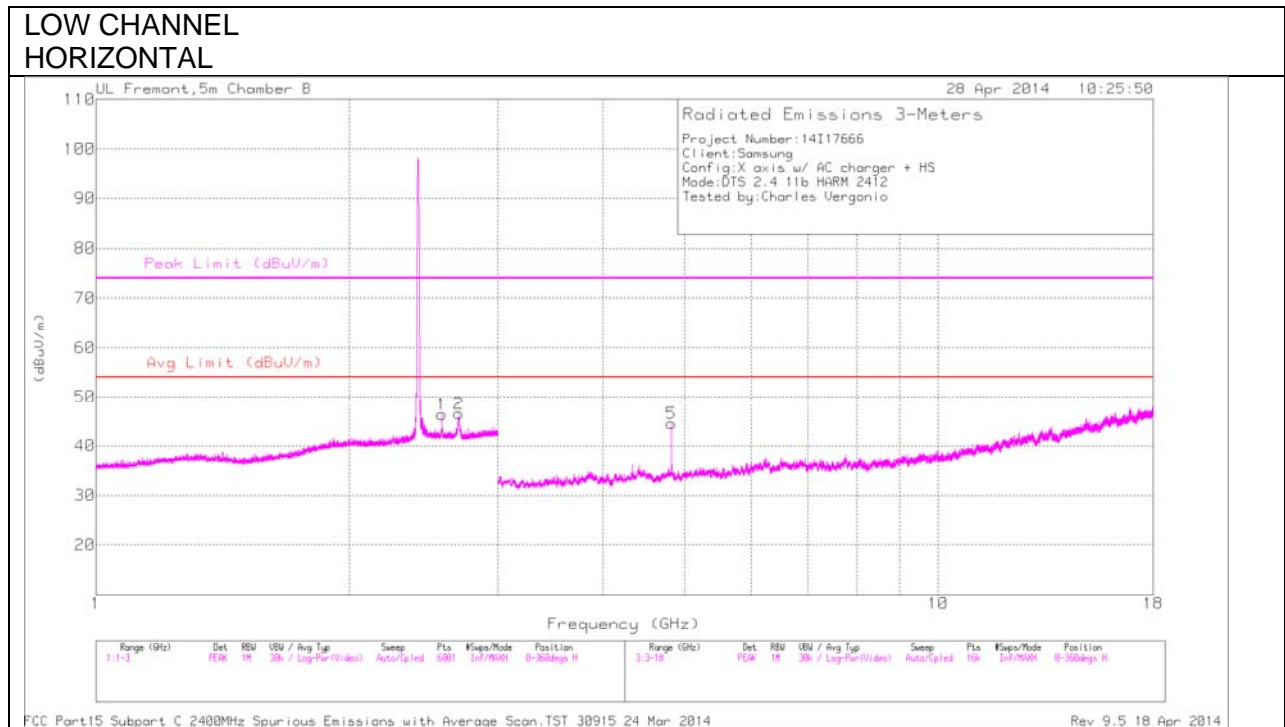

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL
 VERTICAL

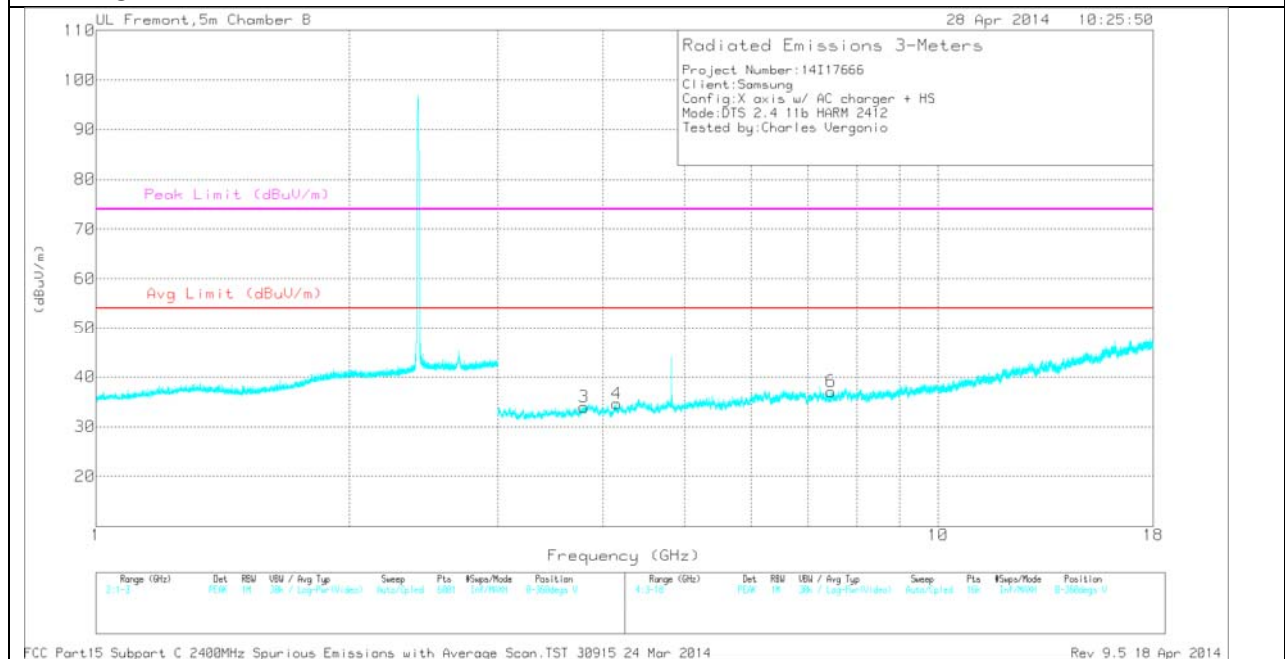

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 2.696	36.9	PK	32.2	-22.5	0	46.6	-	-	74	-27.4	0-360	202	H
5	* 4.824	39.67	PK	34.2	-29.3	0	44.57	-	-	74	-29.43	0-360	202	H
3	* 3.799	31.14	PK	33.6	-30.8	0	33.94	-	-	74	-40.06	0-360	202	V
4	* 4.15	30.78	PK	33.6	-29.8	0	34.58	-	-	74	-39.42	0-360	99	V
6	* 7.466	28.51	PK	35.6	-27	0	37.11	-	-	74	-36.89	0-360	99	V
1	2.573	36.68	PK	32.5	-22.8	0	46.38	-	-	-	-	0-360	202	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.695	42.95	PK2	32.2	-22.5	0	52.65	-	-	74	-21.35	360	100	H
* 2.693	31.32	MAV1	32.2	-22.5	0	41.02	54	-12.98	-	-	360	100	H
* 4.824	47.12	PK2	34.2	-29.3	0	52.02	-	-	74	-21.98	267	220	H
* 4.824	42.81	MAV1	34.2	-29.3	0	47.71	54	-6.29	-	-	267	220	H
* 3.796	40.73	PK2	33.6	-30.8	0	43.53	-	-	74	-30.47	360	100	V
* 4.152	40.86	PK2	33.6	-29.8	0	44.66	-	-	74	-29.34	360	100	V
* 7.465	37.78	PK2	35.6	-27	0	46.38	-	-	74	-27.62	360	100	V
2.572	43.37	PK2	32.5	-22.8	0	53.07	-	-	-	-	360	100	H
2.574	31.68	MAV1	32.5	-22.8	0	41.38	-	-	-	-	360	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

MID CHANNEL
 HORIZONTAL

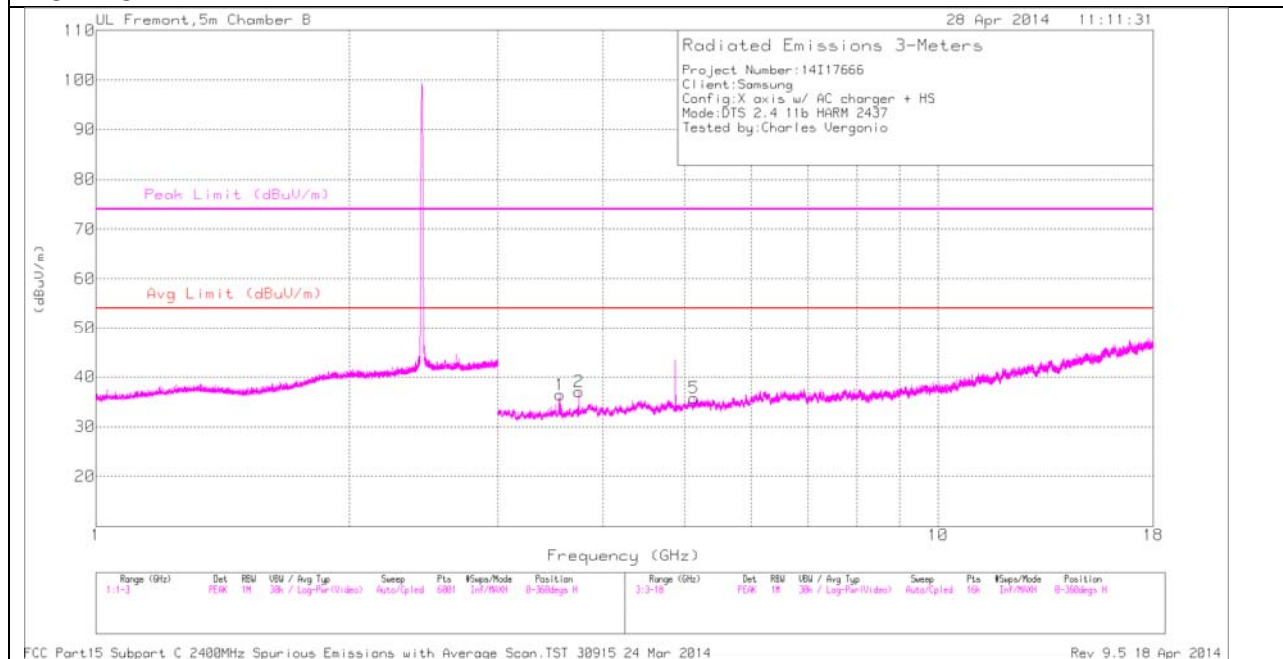

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL
 VERTICAL

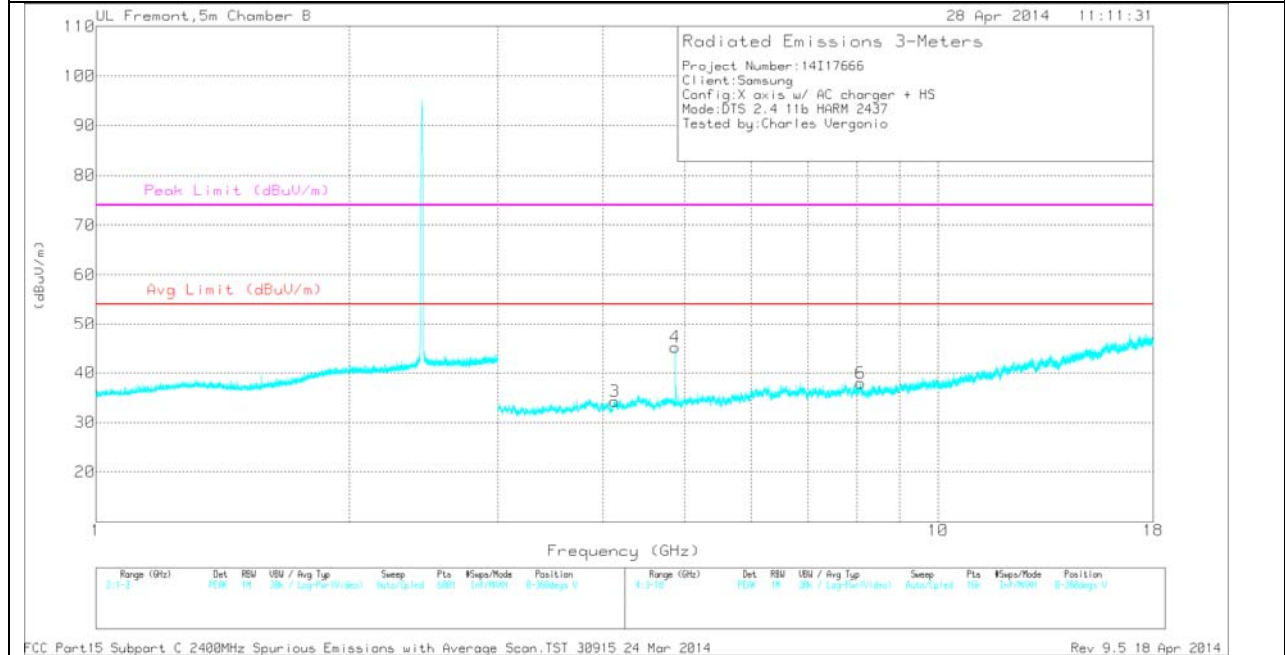

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.554	34.6	PK	33	-31.2	0	36.4	-	-	74	-37.6	0-360	202	H
2	* 3.744	35.08	PK	33.5	-31.5	0	37.08	-	-	74	-36.92	0-360	202	H
5	* 5.131	30.65	PK	34.3	-29.2	0	35.75	-	-	74	-38.25	0-360	202	H
3	* 4.127	30.78	PK	33.6	-30.1	0	34.28	-	-	74	-39.72	0-360	202	V
4	* 4.874	41.63	PK	34.2	-30.6	0	45.23	-	-	74	-28.77	0-360	202	V
6	* 8.084	28.05	PK	35.7	-25.8	0	37.95	-	-	74	-36.05	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.554	41.04	PK2	33	-31.2	0	42.84	-	-	74	-31.16	360	100	H
* 3.742	41.2	PK2	33.5	-31.5	0	43.2	-	-	74	-30.8	360	100	H
* 5.128	40.39	PK2	34.3	-29.1	0	45.59	-	-	74	-28.41	360	100	H
* 4.126	40.61	PK2	33.6	-30.2	0	44.01	-	-	74	-29.99	360	100	V
* 8.086	37.55	PK2	35.7	-25.8	0	47.45	-	-	74	-26.55	360	100	V
* 4.874	47.15	PK2	34.2	-30.6	0	50.75	-	-	74	-23.25	258	246	V
* 4.874	42.59	MAv1	34.2	-30.6	0	46.19	54	-7.81	-	-	258	246	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**HIGH CHANNEL
 HORIZONTAL**

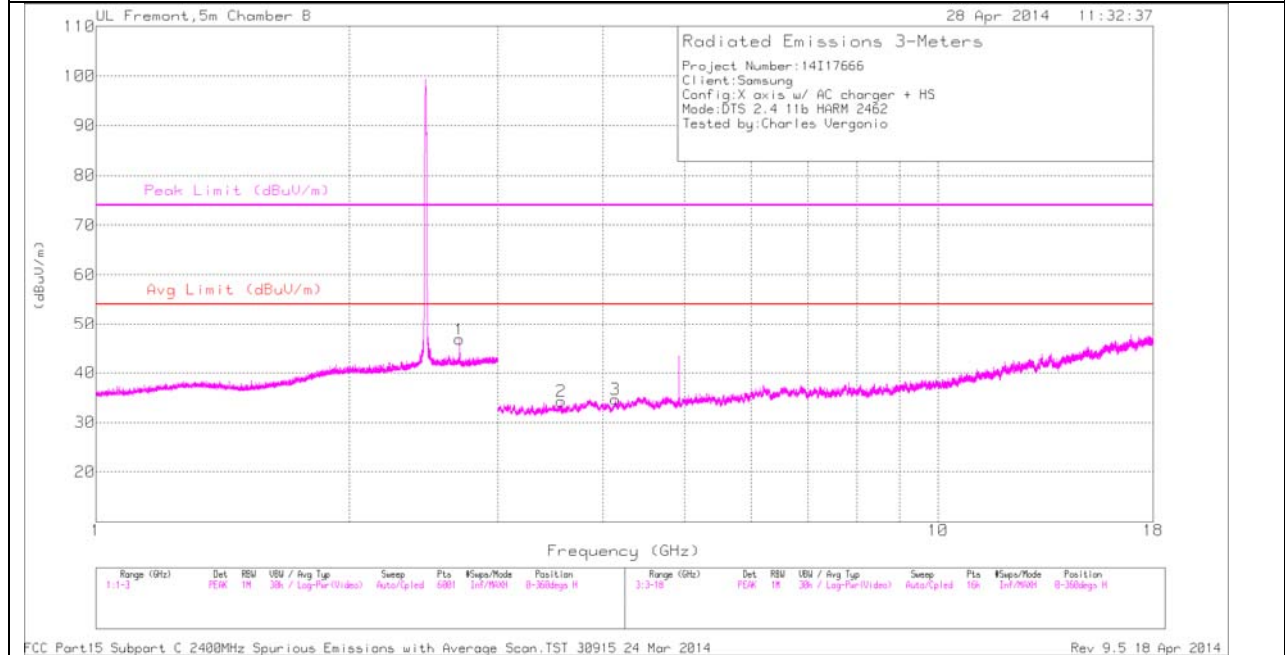

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL
 VERTICAL**

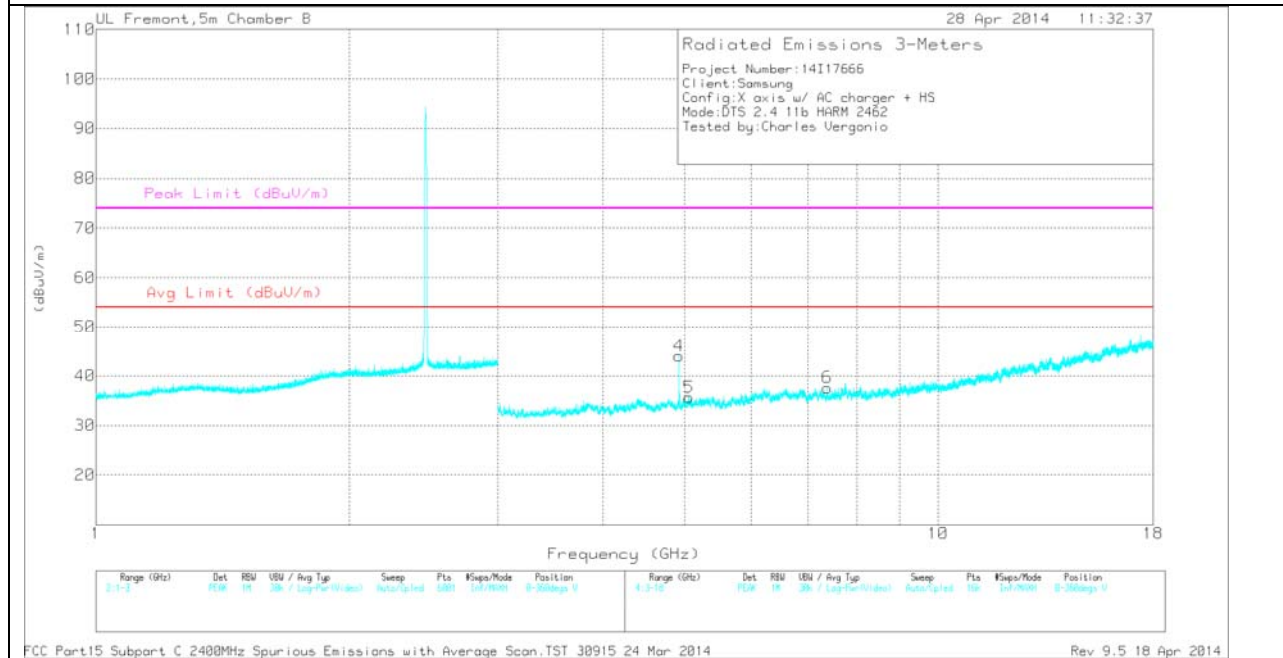

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.7	37.1	PK	32.2	-22.5	0	46.8	-	-	74	-27.2	0-360	202	H
2	* 3.569	32.4	PK	33	-31.2	0	34.2	-	-	74	-39.8	0-360	202	H
3	* 4.14	30.76	PK	33.6	-29.7	0	34.66	-	-	74	-39.34	0-360	99	H
4	* 4.924	40.58	PK	34.2	-30.7	0	44.08	-	-	74	-29.92	0-360	202	V
5	* 5.061	30.39	PK	34.2	-28.9	0	35.69	-	-	74	-38.31	0-360	99	V
6	* 7.386	29.42	PK	35.6	-27.4	0	37.62	-	-	74	-36.38	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.698	42.51	PK2	32.2	-22.5	0	52.21	-	-	74	-21.79	256	222	H
* 2.701	31	MAV1	32.2	-22.5	0	40.7	54	-13.3	-	-	256	222	H
* 3.568	41.75	PK2	33	-31.2	0	43.55	-	-	74	-30.45	360	100	H
* 4.141	40.09	PK2	33.6	-29.7	0	43.99	-	-	74	-30.01	360	100	H
* 5.064	40.3	PK2	34.2	-28.8	0	45.7	-	-	74	-28.3	360	100	V
* 7.387	39.76	PK2	35.6	-27.4	0	47.96	-	-	74	-26.04	360	100	V
* 4.924	47.39	PK2	34.2	-30.7	0	50.89	-	-	74	-23.11	256	222	V
* 4.924	42.71	MAV1	34.2	-30.7	0	46.21	54	-7.79	-	-	256	222	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**10.2.2. TX ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

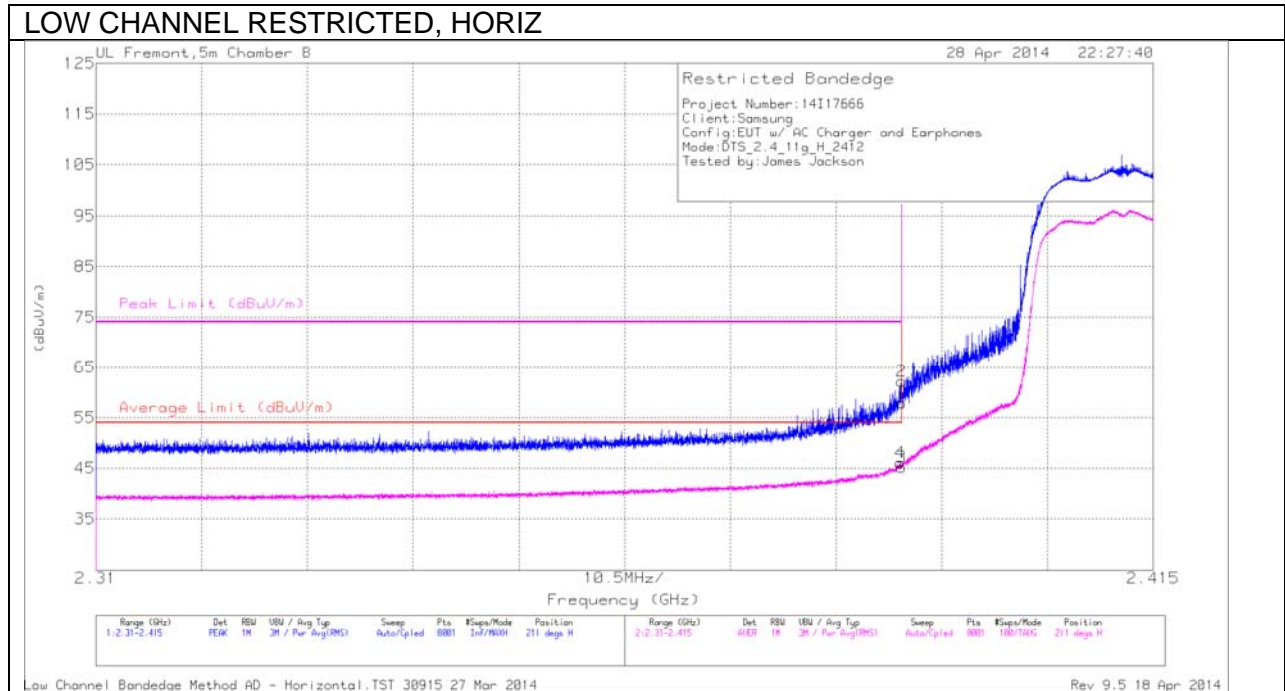

LOW CHANNEL RESTRICTED, DATA, HORIZ

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	48.68	PK	32.1	-22.9	57.88	-	-	74	-16.12	211	236	H
2	* 2.39	53.05	PK	32.1	-22.9	62.25	-	-	74	-11.75	211	236	H
3	* 2.39	35.99	RMS	32.1	-22.9	45.19	54	-8.81	-	-	211	236	H
4	* 2.39	36.84	RMS	32.1	-22.9	46.04	54	-7.96	-	-	211	236	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

LOW CHANNEL RESTRICTED , VERT

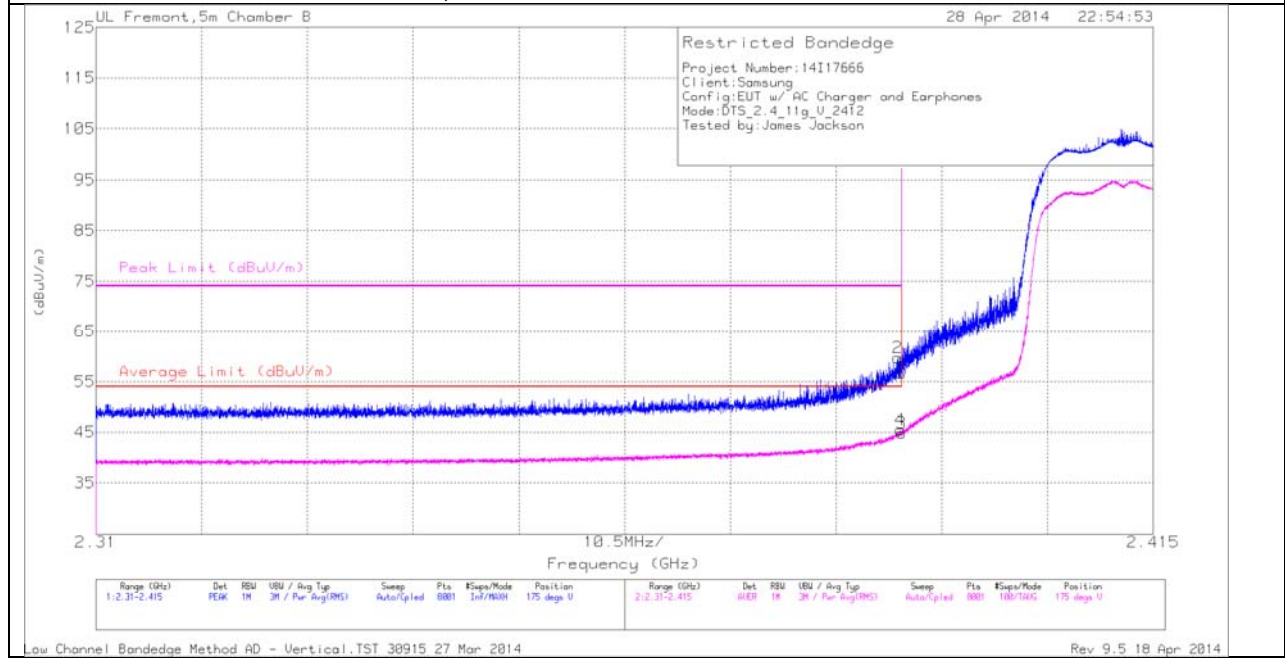

LOW CHANNEL RESTRICTED, DATA, VERT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.43	PK	32.1	-22.9	56.63	-	-	74	-17.37	175	365	V
2	* 2.39	50.51	PK	32.1	-22.9	59.71	-	-	74	-14.29	175	365	V
3	* 2.39	35.59	RMS	32.1	-22.9	44.79	54	-9.21	-	-	175	365	V
4	* 2.39	36.24	RMS	32.1	-22.9	45.44	54	-8.56	-	-	175	365	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

AUTHORIZED BANDEDGE (HIGH CHANNEL)

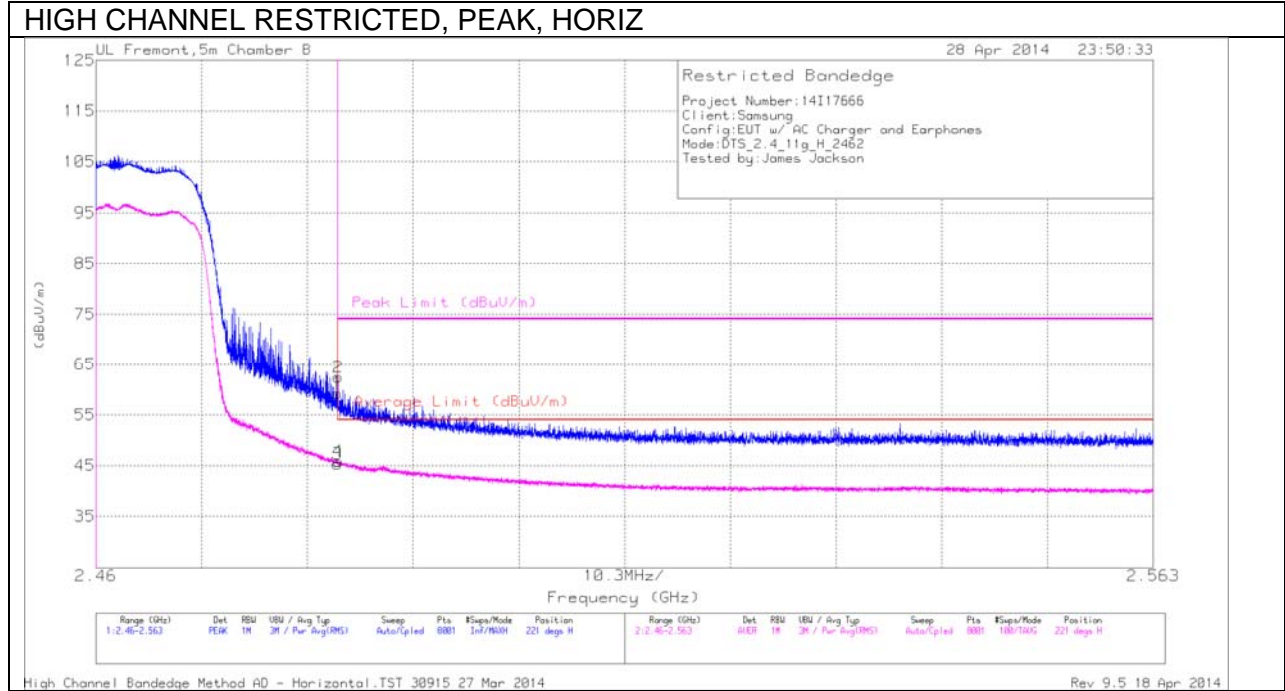

HIGH CHANNEL RESTRICTED, AVERAGE, HORIZ

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	49.49	PK	32.4	-22.6	59.29	-	-	74	-14.71	221	282	H
2	* 2.484	52.66	PK	32.4	-22.6	62.46	-	-	74	-11.54	221	282	H
3	* 2.484	35.58	RMS	32.4	-22.6	45.38	54	-8.62	-	-	221	282	H
4	* 2.484	35.99	RMS	32.4	-22.6	45.79	54	-8.21	-	-	221	282	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

High Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

HIGH CHANNEL BANDEDGE, PEAK, VERT

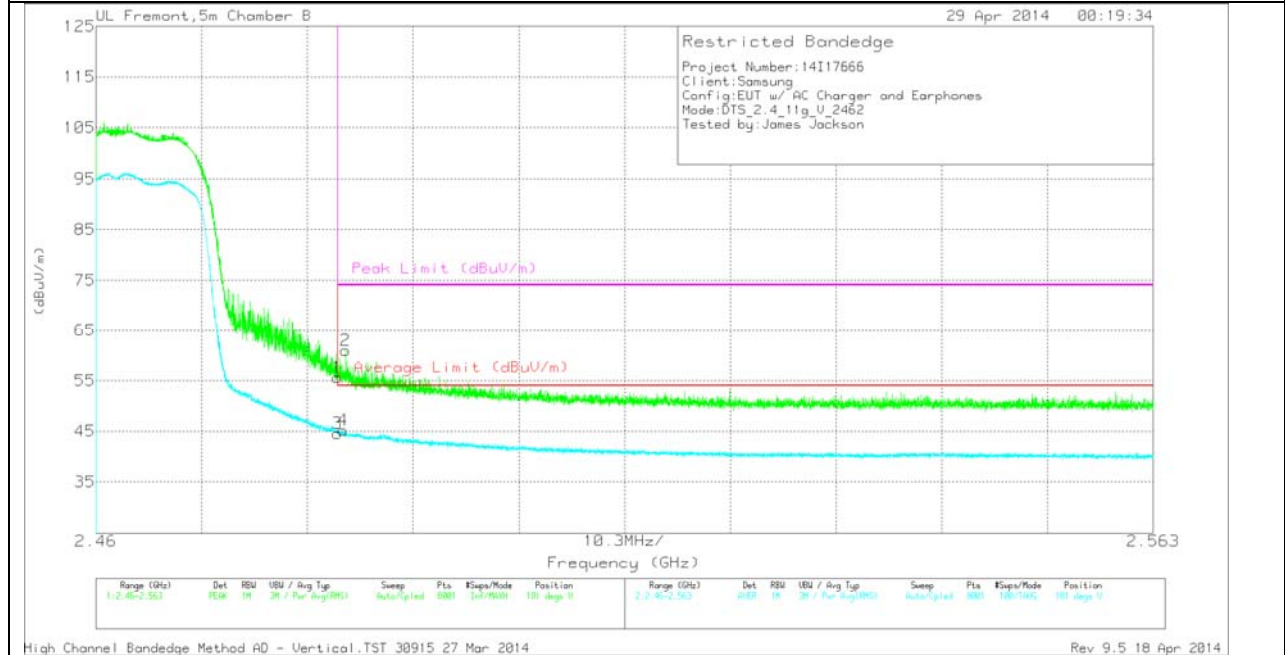

HIGH CHANNEL BANDEDGE, AVERAGE, VERT

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.8	PK	32.4	-22.6	55.6	-	-	74	-18.4	181	290	V
2	* 2.484	51.13	PK	32.4	-22.6	60.93	-	-	74	-13.07	181	290	V
3	* 2.484	34.78	RMS	32.4	-22.6	44.58	54	-9.42	-	-	181	290	V
4	* 2.484	35.43	RMS	32.4	-22.6	45.23	54	-8.77	-	-	181	290	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


High Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

HARMONICS AND SPURIOUS EMISSIONS

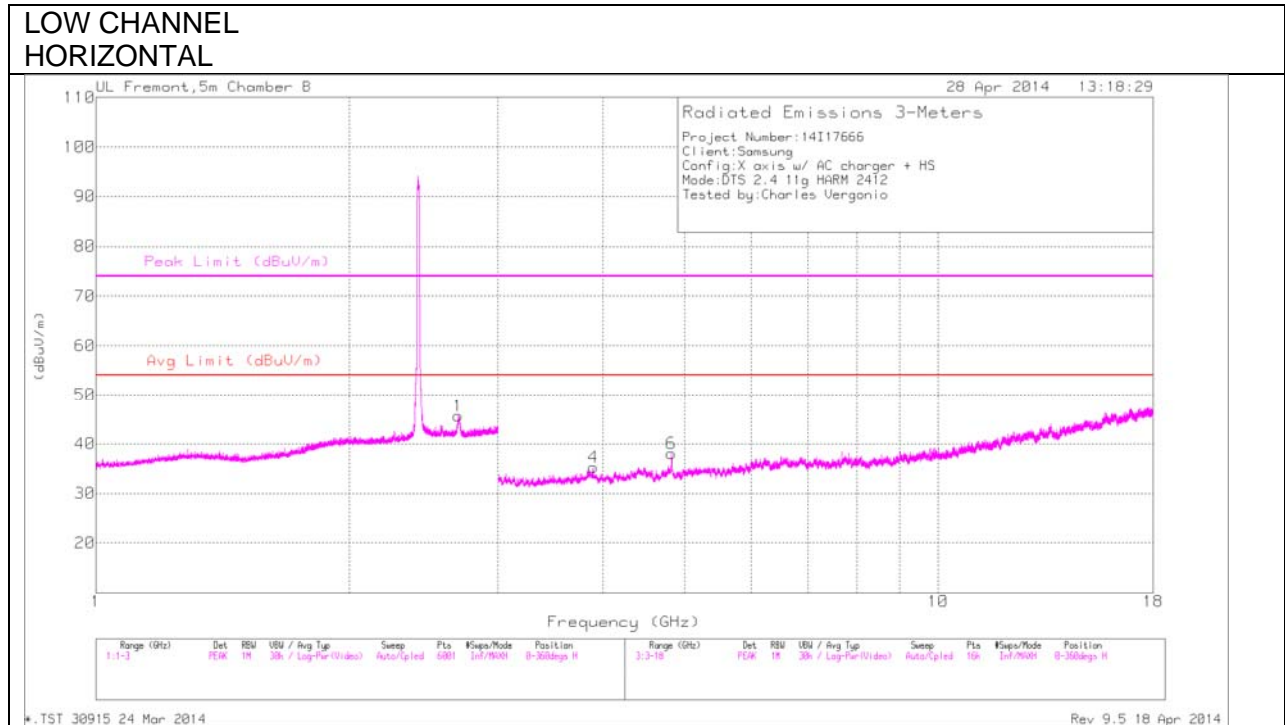

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL
 VERTICAL

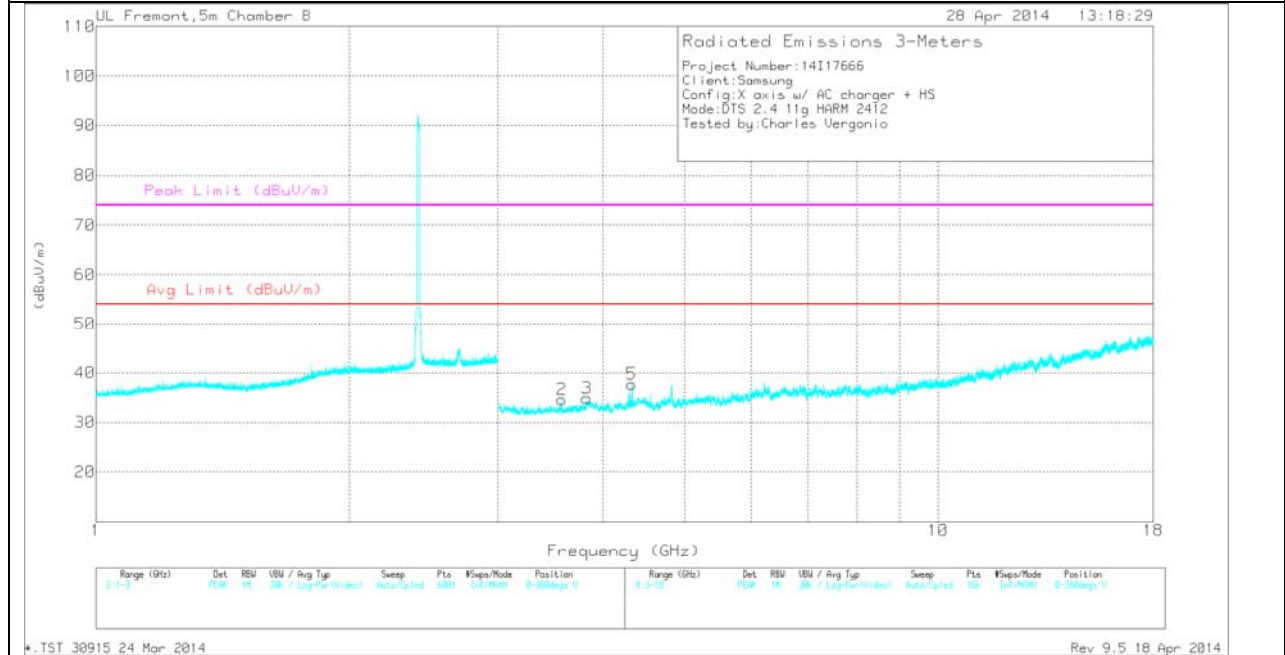

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.692	35.98	PK	32.2	-22.5	0	45.68	-	-	74	-28.32	0-360	202	H
4	* 3.892	31.95	PK	33.8	-30.5	0	35.25	-	-	74	-38.75	0-360	202	H
6	* 4.825	33.22	PK	34.2	-29.4	0	38.02	-	-	74	-35.98	0-360	202	H
2	* 3.573	32.96	PK	33	-31.3	0	34.66	-	-	74	-39.34	0-360	99	V
3	* 3.826	31.57	PK	33.7	-30.4	0	34.87	-	-	74	-39.13	0-360	99	V
5	* 4.329	35.04	PK	33.7	-31	0	37.74	-	-	74	-36.26	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.693	48.22	PK2	32.2	-22.5	57.92	-	-	74	-16.08	228	290	H
* 2.694	36.31	MAV1	32.2	-22.5	46.01	54	-7.99	-	-	228	290	H
* 3.894	40.96	PK2	33.8	-30.5	44.26	-	-	74	-29.74	228	290	H
* 4.825	46.17	PK2	34.2	-29.4	50.97	-	-	74	-23.03	277	271	H
* 4.824	32.73	MAV1	34.2	-29.3	37.63	54	-16.37	-	-	277	271	H
* 3.57	41.27	PK2	33	-31.3	42.97	-	-	74	-31.03	228	290	V
* 3.828	40.8	PK2	33.7	-30.3	44.2	-	-	74	-29.8	228	290	V
* 4.331	41.69	PK2	33.7	-31	44.39	-	-	74	-29.61	62	220	V
* 4.33	29.79	MAV1	33.7	-31	32.49	54	-21.51	-	-	62	220	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

MID CHANNEL
 HORIZONTAL

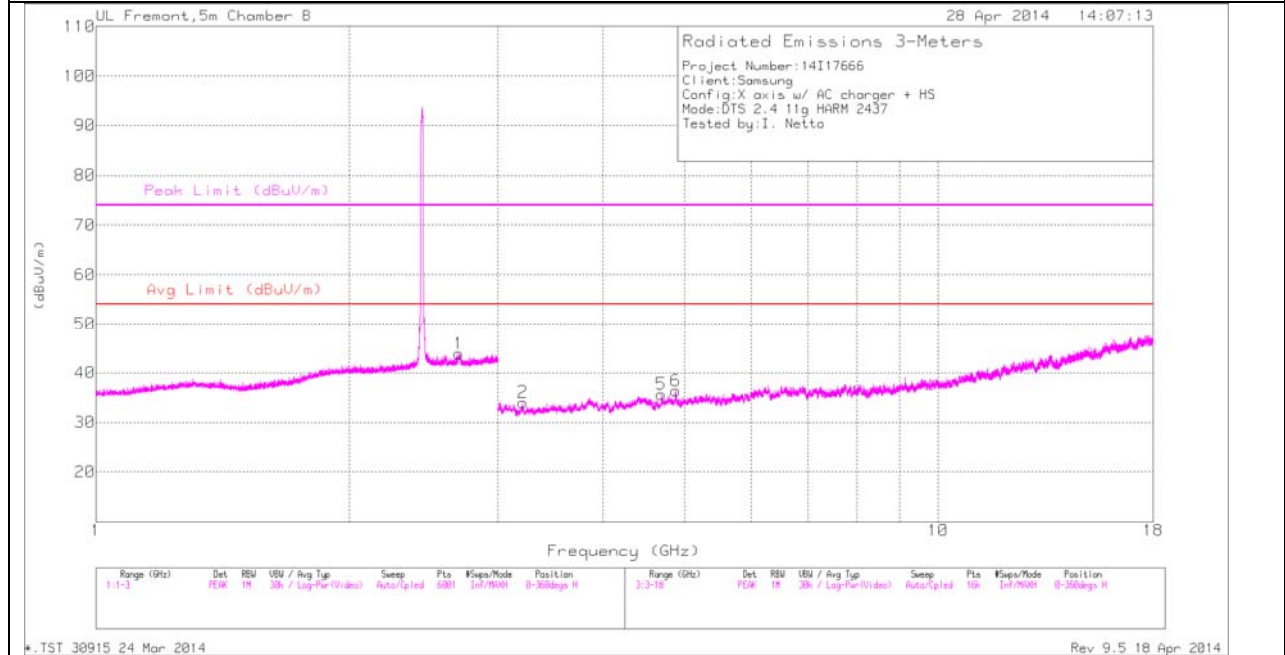

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL
 VERTICAL

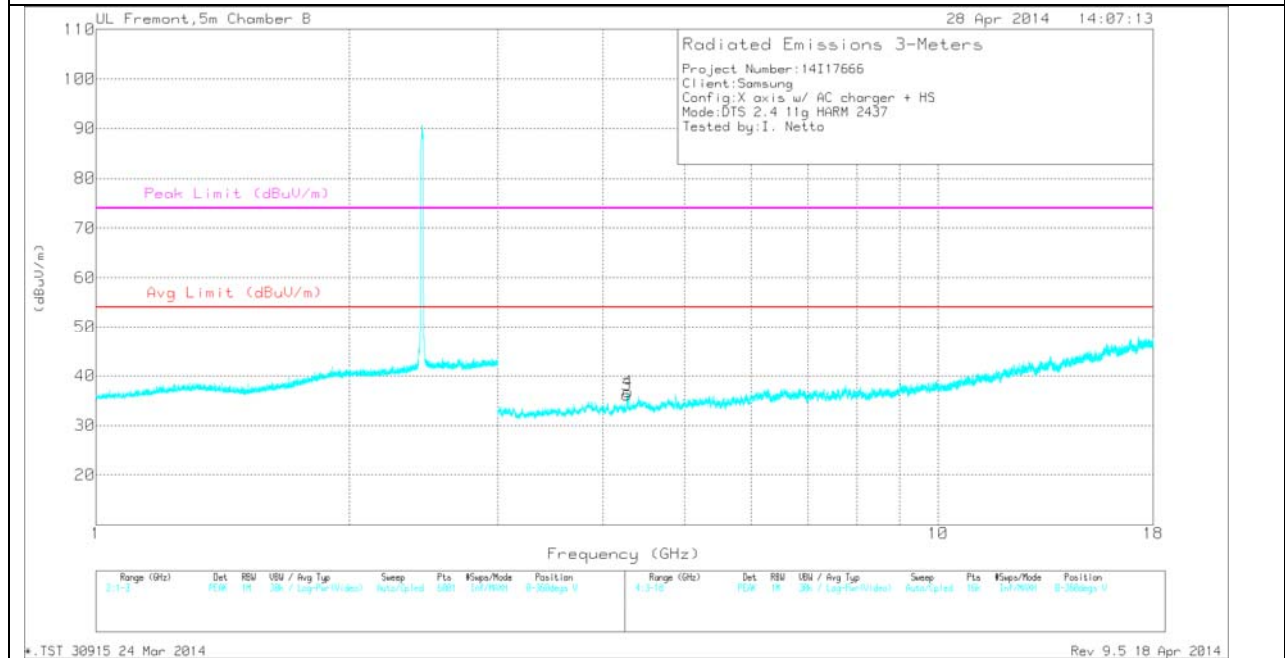

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.698	34.21	PK	32.2	-22.5	0	43.91	-	-	74	-30.09	0-360	202	H
5	* 4.691	31.61	PK	34.2	-30.1	0	35.71	-	-	74	-38.29	0-360	202	H
6	* 4.876	32.86	PK	34.2	-30.6	0	36.46	-	-	74	-37.54	0-360	99	H
3	* 4.267	33.42	PK	33.6	-30.9	0	36.12	-	-	74	-37.88	0-360	99	V
4	* 4.284	34.06	PK	33.7	-31	0	36.76	-	-	74	-37.24	0-360	99	V
2	3.214	32.36	PK	32.8	-31.1	0	34.06	-	-	-	-	0-360	202	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.7	43.86	PK2	32.2	-22.5	53.56	-	-	74	-20.44	360	100	H
* 4.691	41.18	PK2	34.2	-30.1	45.28	-	-	74	-28.72	360	100	H
* 4.876	42	PK2	34.2	-30.6	45.6	-	-	74	-28.4	360	100	H
* 4.268	40.81	PK2	33.6	-30.9	43.51	-	-	74	-30.49	360	100	V
* 4.282	41.51	PK2	33.7	-31	44.21	-	-	74	-29.79	337	306	V
* 4.285	29.67	MAV1	33.7	-31	32.37	54	-21.63	-	-	337	306	V
3.215	41.01	PK2	32.8	-31.1	42.71	-	-	-	-	360	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**HIGH CHANNEL
 HORIZONTAL**

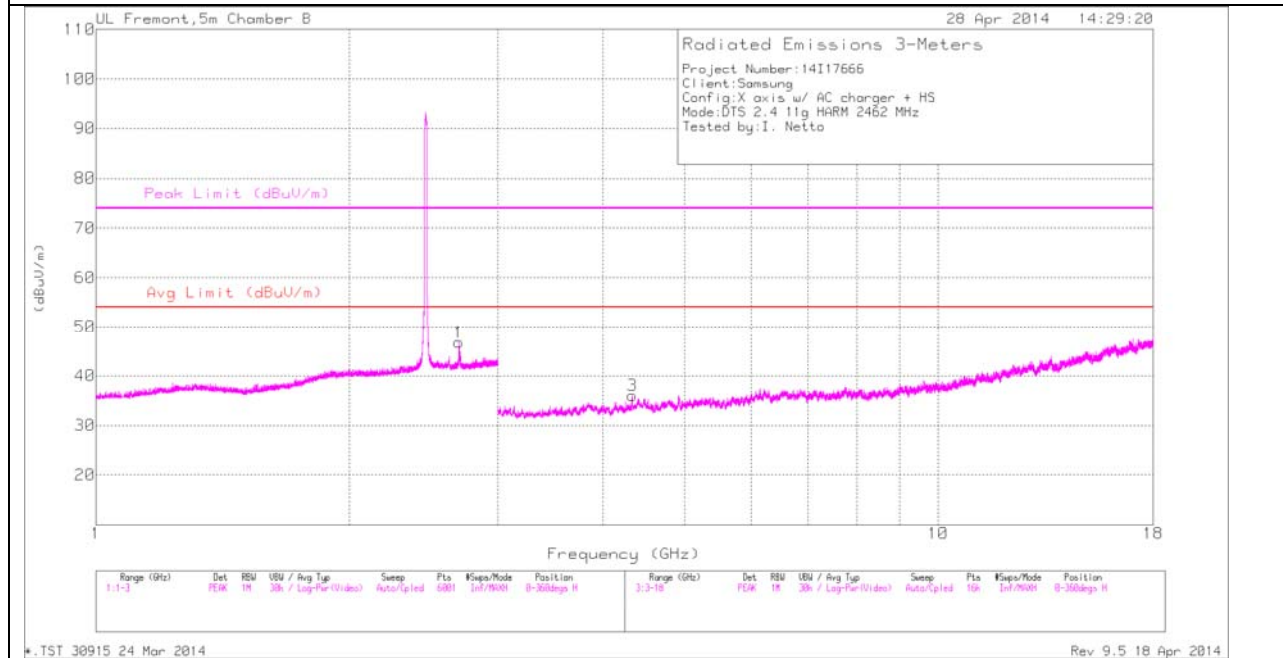

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL
 VERTICAL**

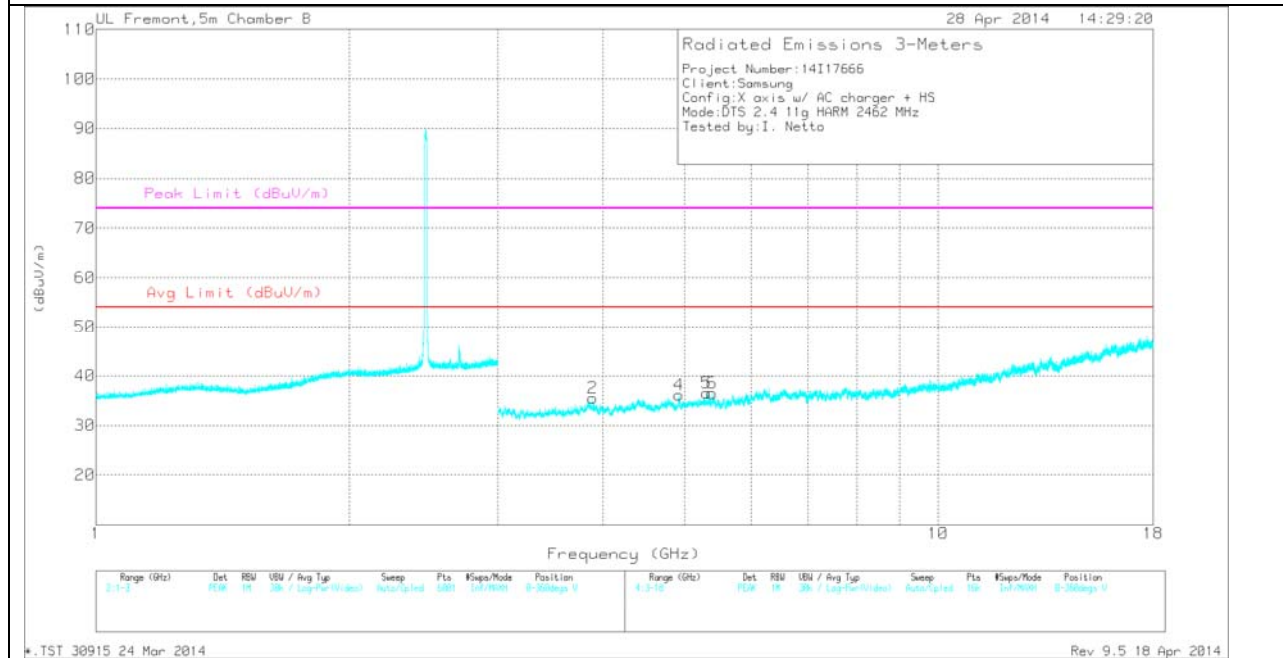

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.697	37.09	PK	32.2	-22.5	0	46.79	-	-	74	-27.21	0-360	202	H
3	* 4.334	33.32	PK	33.7	-31	0	36.02	-	-	74	-37.98	0-360	202	H
2	* 3.889	32.11	PK	33.8	-30.4	0	35.51	-	-	74	-38.49	0-360	99	V
4	* 4.924	32.71	PK	34.2	-30.7	0	36.21	-	-	74	-37.79	0-360	202	V
6	* 5.389	30.48	PK	34.5	-28.5	0	36.48	-	-	74	-37.52	0-360	99	V
5	5.31	30.85	PK	34.4	-28.7	0	36.55	-	-	-	-	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.697	48.01	PK2	32.2	-22.5	57.71	-	-	74	-16.29	248	288	H
* 2.697	33.6	MAV1	32.2	-22.5	43.3	54	-10.7	-	-	248	288	H
* 4.336	41.43	PK2	33.7	-31	44.13	-	-	74	-29.87	359	100	H
* 3.888	40.06	PK2	33.8	-30.4	43.46	-	-	74	-30.54	359	100	V
* 4.923	42.69	PK2	34.2	-30.7	46.19	-	-	74	-27.81	359	100	V
* 5.387	39.28	PK2	34.5	-28.5	45.28	-	-	74	-28.72	359	100	V
5.312	39.66	PK2	34.4	-28.7	45.36	-	-	-	-	359	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**10.2.3. TX ABOVE 1 GHz 802.11n HT20 MODE IN THE 2.4 GHz BAND
 RESTRICTED BANDEDGE (LOW CHANNEL)**

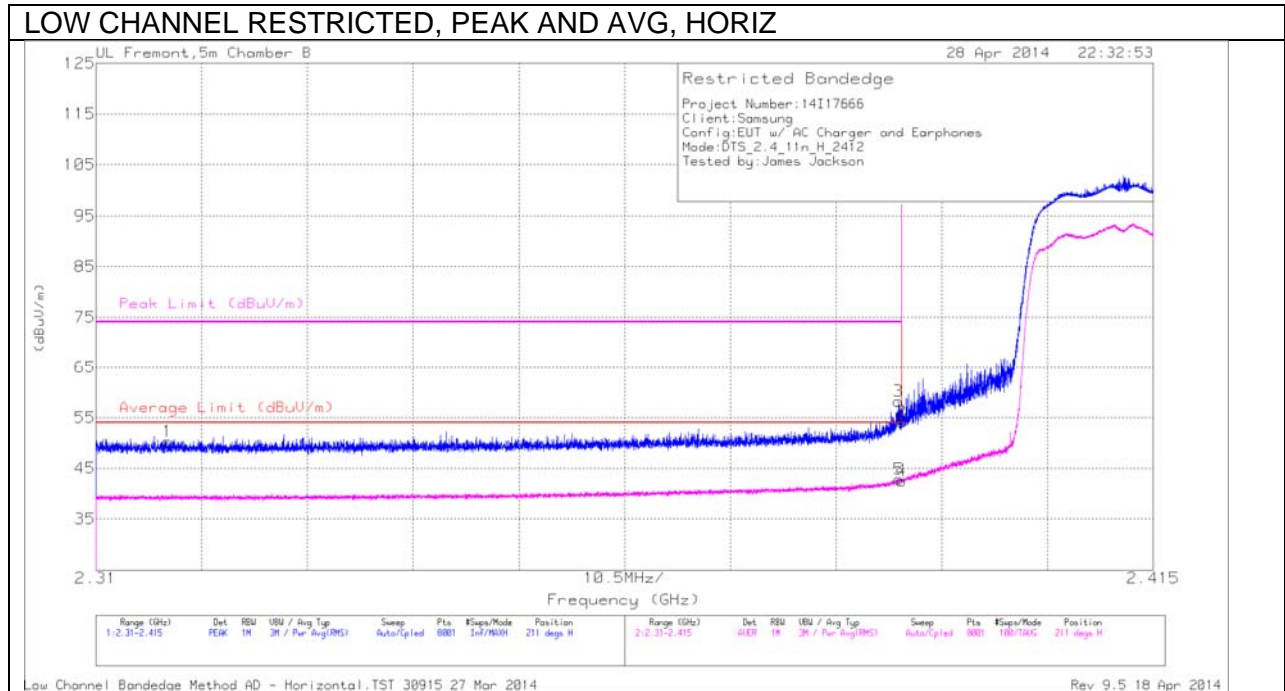

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.317	41.56	PK	31.7	-23	50.26	-	-	74	-23.74	211	236	H
2	* 2.39	44.99	PK	32.1	-22.9	54.19	-	-	74	-19.81	211	236	H
3	* 2.39	49.08	PK	32.1	-22.9	58.28	-	-	74	-15.72	211	236	H
4	* 2.39	33.33	RMS	32.1	-22.9	42.53	54	-11.47	-	-	211	236	H
5	* 2.39	33.63	RMS	32.1	-22.9	42.83	54	-11.17	-	-	211	236	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

LOW CHANNEL RESTRICTED, PEAK AND AVG, VERT

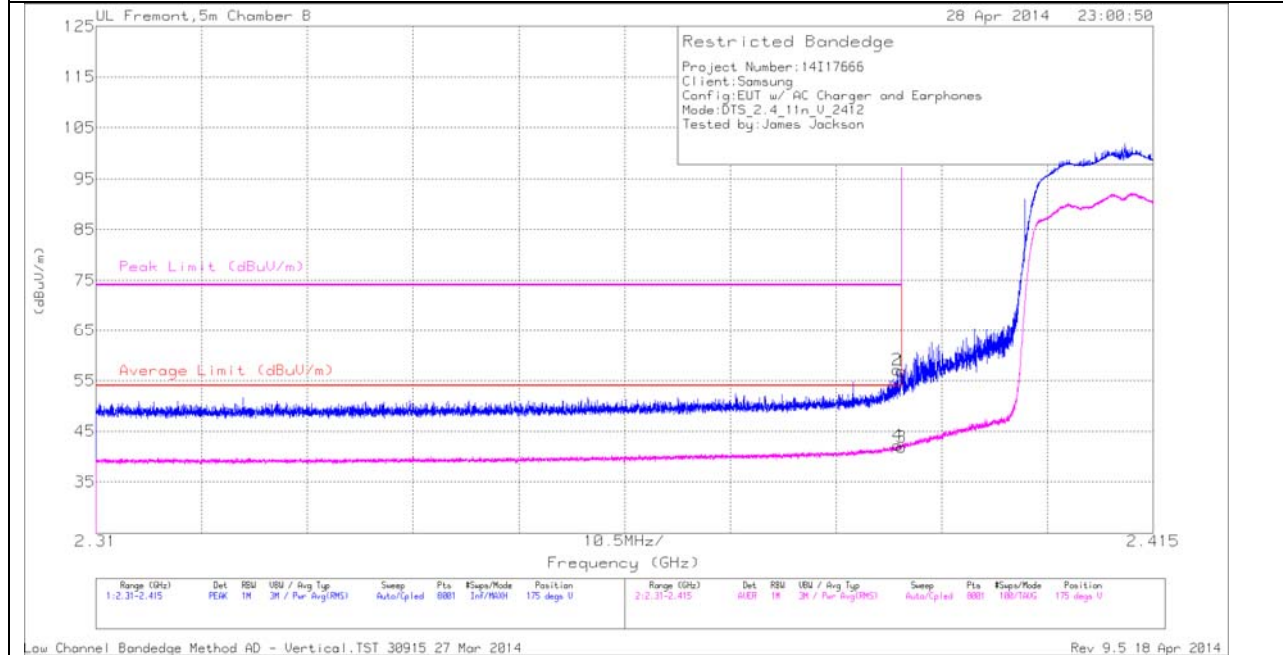

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	47.7	PK	32.1	-22.9	56.9	-	-	74	-17.1	175	365	V
2	* 2.39	47.9	PK	32.1	-22.9	57.1	-	-	74	-16.9	175	365	V
3	* 2.39	32.64	RMS	32.1	-22.9	41.84	54	-12.16	-	-	175	365	V
4	* 2.39	33.03	RMS	32.1	-22.9	42.23	54	-11.77	-	-	175	365	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

Low Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

AUTHORIZED BANDEDGE (HIGH CHANNEL)

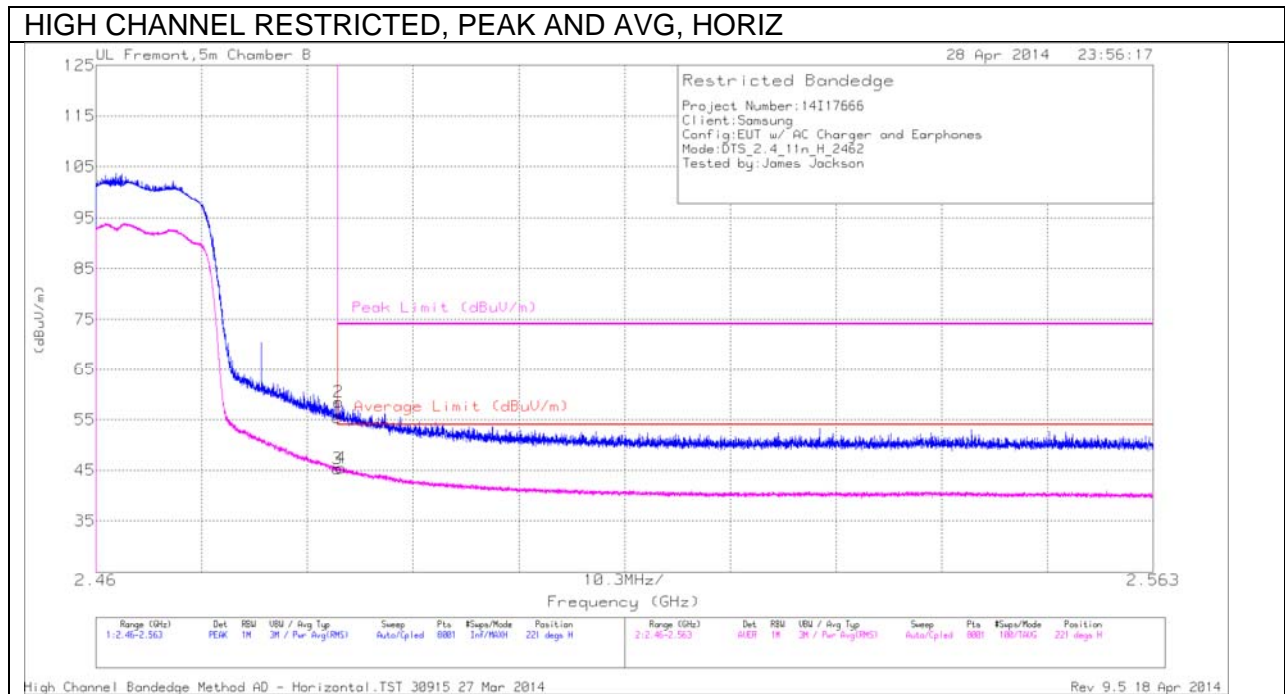

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.53	PK	32.4	-22.6	55.33	-	-	74	-18.67	221	282	H
2	* 2.484	48.64	PK	32.4	-22.6	58.44	-	-	74	-15.56	221	282	H
3	* 2.484	35.53	RMS	32.4	-22.6	45.33	54	-8.67	-	-	221	282	H
4	* 2.484	35.7	RMS	32.4	-22.6	45.5	54	-8.5	-	-	221	282	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

High Channel Bandedge Method AD - Horizontal.TST 30915 27 Mar 2014

HIGH CHANNEL BANDEDGE, PEAK AND AVG, VERT

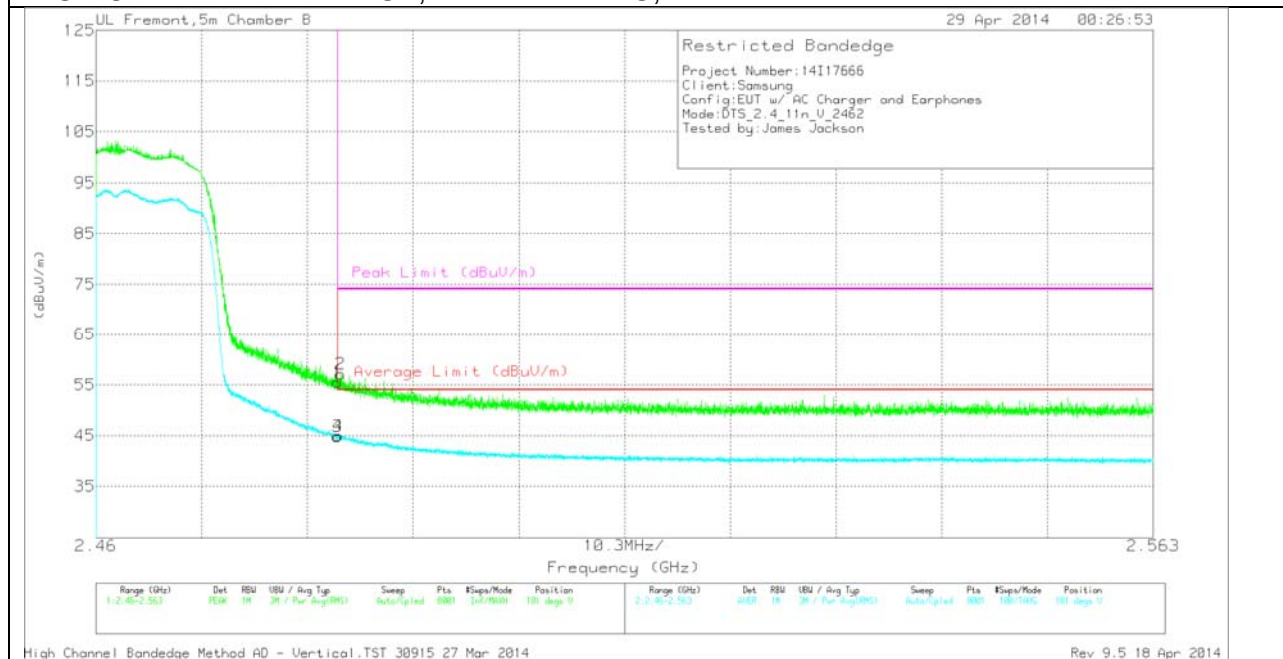

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	45.76	PK	32.4	-22.6	55.56	-	-	74	-18.44	181	290	V
2	* 2.484	47.36	PK	32.4	-22.6	57.16	-	-	74	-16.84	181	290	V
3	* 2.484	35.01	RMS	32.4	-22.6	44.81	54	-9.19	-	-	181	290	V
4	* 2.484	35.16	RMS	32.4	-22.6	44.96	54	-9.04	-	-	181	290	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


High Channel Bandedge Method AD - Vertical.TST 30915 27 Mar 2014

HARMONICS AND SPURIOUS EMISSIONS

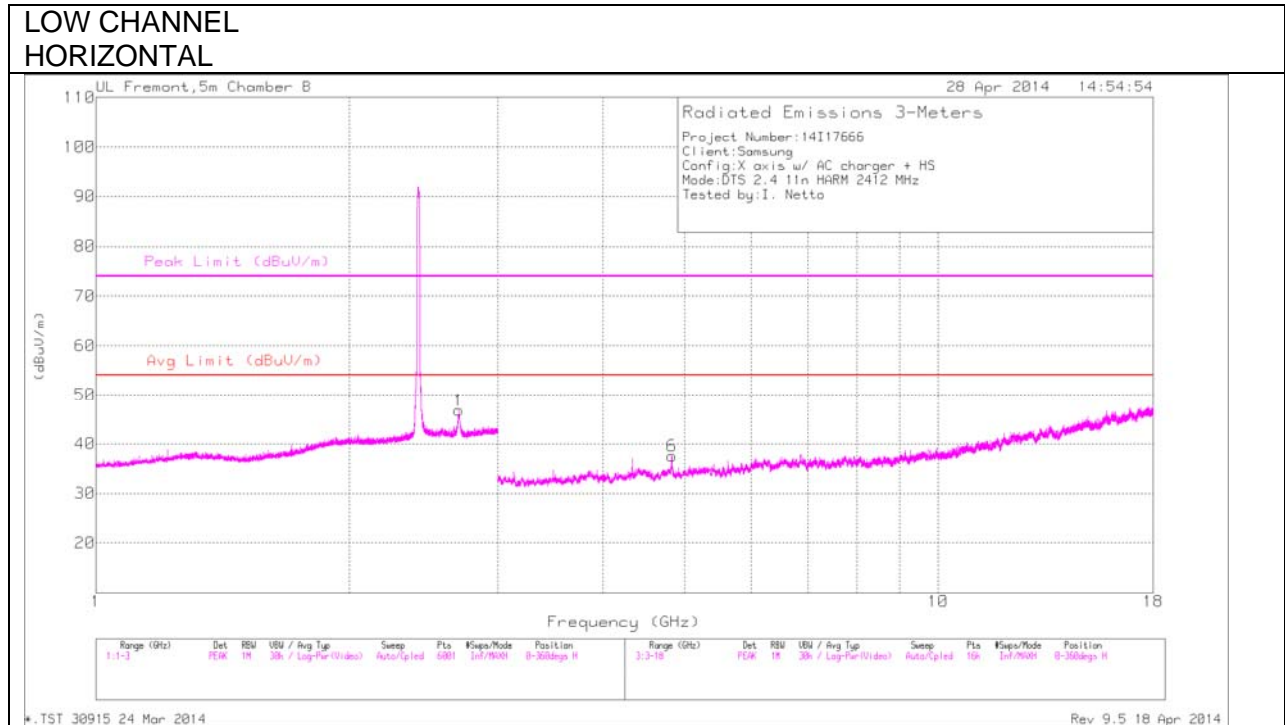

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL
 VERTICAL

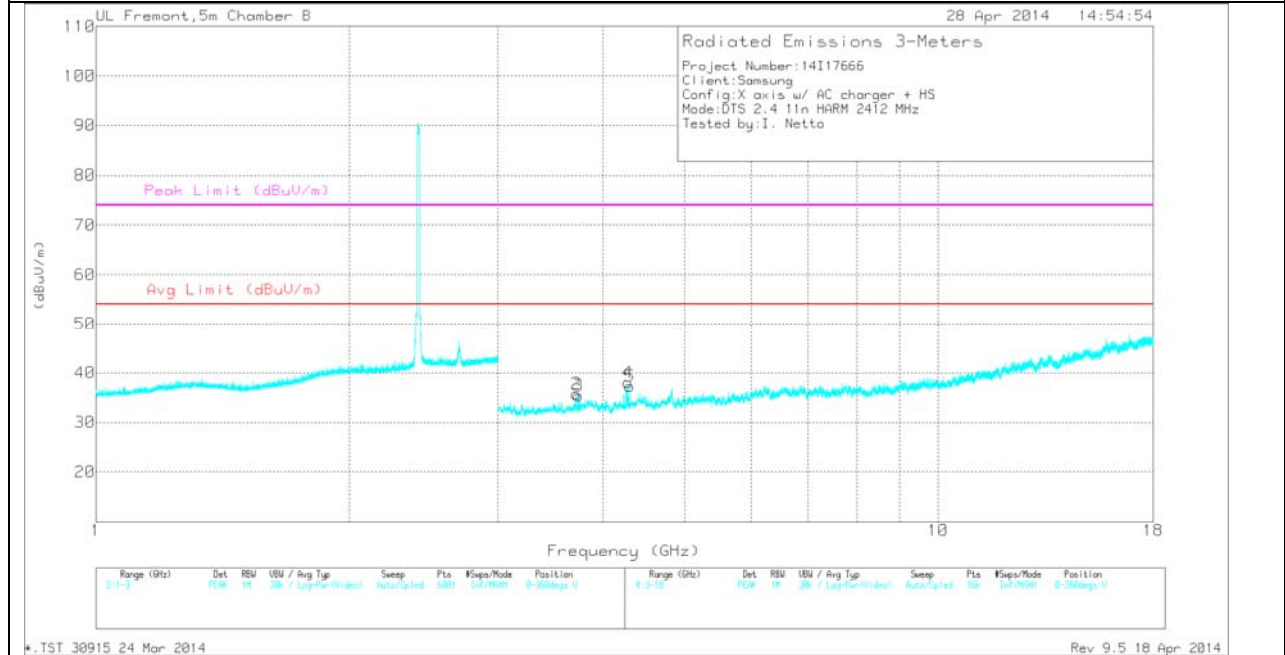

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA
 Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.697	37.16	PK	32.2	-22.5	0	46.86	-	-	74	-27.14	0-360	202	H
6	* 4.833	33	PK	34.2	-29.6	0	37.6	-	-	74	-36.4	0-360	202	H
2	* 3.716	33.71	PK	33.4	-31.3	0	35.81	-	-	74	-38.19	0-360	99	V
3	* 3.741	33.41	PK	33.5	-31.5	0	35.41	-	-	74	-38.59	0-360	99	V
4	* 4.281	35.39	PK	33.7	-31	0	38.09	-	-	74	-35.91	0-360	202	V
5	* 4.305	34.75	PK	33.7	-31.2	0	37.25	-	-	74	-36.75	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.697	49.53	PK2	32.2	-22.5	59.23	-	-	74	-14.77	246	289	H
* 2.697	36.24	MAV1	32.2	-22.5	45.94	54	-8.06	-	-	246	289	H
* 4.833	43.42	PK2	34.2	-29.6	48.02	-	-	74	-25.98	264	249	H
* 4.833	30.32	MAV1	34.2	-29.6	34.92	54	-19.08	-	-	264	249	H
* 3.716	41.41	PK2	33.4	-31.3	43.51	-	-	74	-30.49	82	177	V
* 3.716	29.46	MAV1	33.4	-31.3	31.56	54	-22.44	-	-	82	177	V
* 3.74	41.43	PK2	33.5	-31.6	43.33	-	-	74	-30.67	177	342	V
* 3.743	29.18	MAV1	33.5	-31.5	31.18	54	-22.82	-	-	177	342	V
* 4.28	41.25	PK2	33.7	-31	43.95	-	-	74	-30.05	235	322	V
* 4.282	29.53	MAV1	33.7	-31	32.23	54	-21.77	-	-	235	322	V
* 4.303	40.98	PK2	33.7	-31.2	43.48	-	-	74	-30.52	311	396	V
* 4.306	29.49	MAV1	33.7	-31.2	31.99	54	-22.01	-	-	311	396	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

MID CHANNEL
 HORIZONTAL

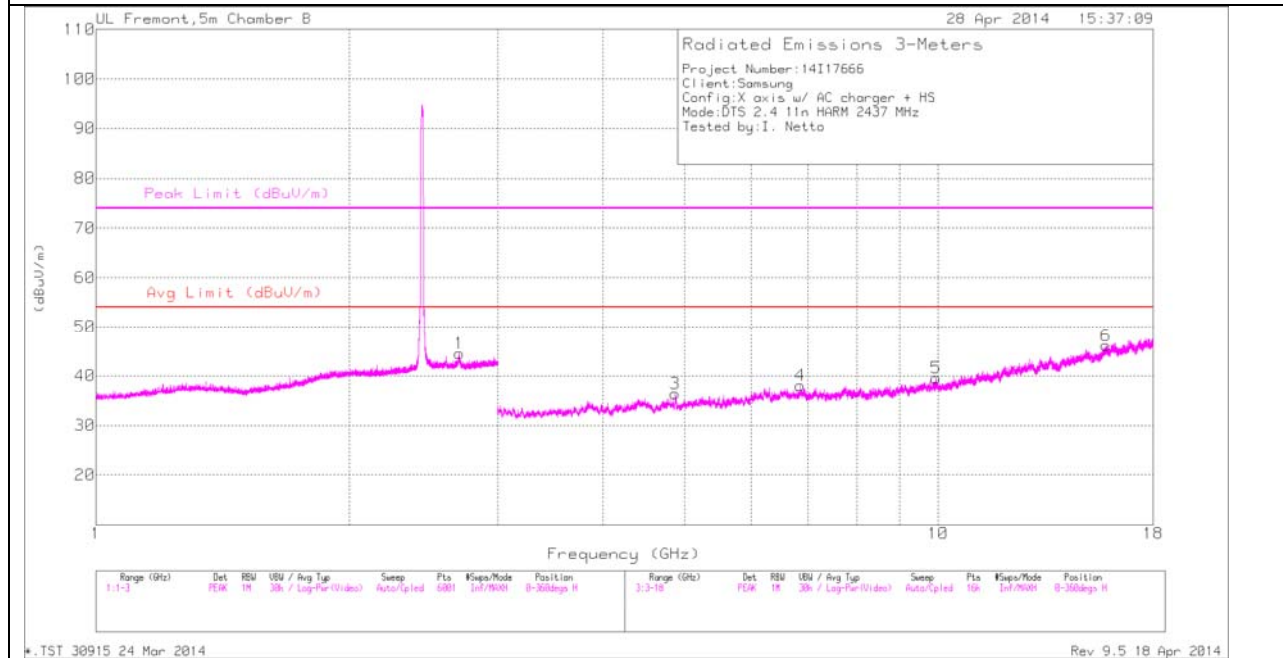

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL
 VERTICAL

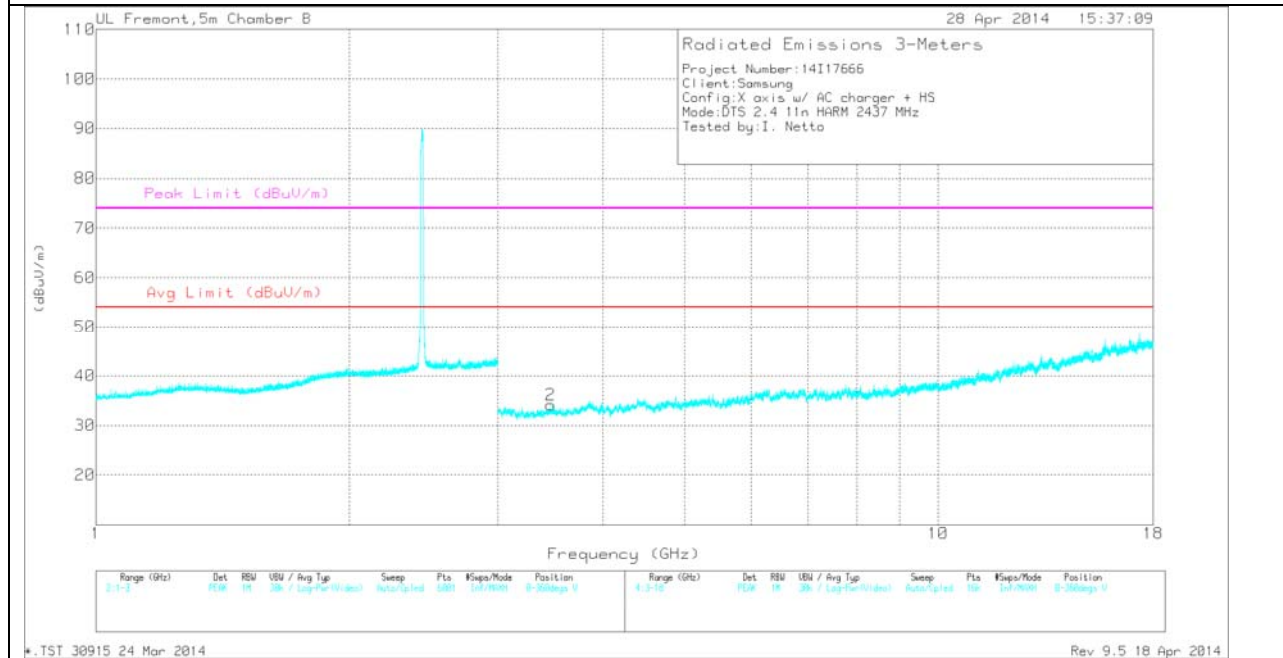

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.7	34.8	PK	32.2	-22.5	0	44.5	-	-	74	-29.5	0-360	202	H
3	* 4.873	32.81	PK	34.2	-30.6	0	36.41	-	-	74	-37.59	0-360	201	H
6	* 15.83	25.54	PK	40.7	-20.1	0	46.14	-	-	74	-27.86	0-360	201	H
2	3.465	32.58	PK	32.8	-31.2	0	34.18	-	-	-	-	0-360	202	V
4	6.856	29.91	PK	35.6	-27.5	0	38.01	-	-	-	-	0-360	201	H
5	9.946	26.43	PK	37	-23.9	0	39.53	-	-	-	-	0-360	99	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.701	43.41	PK2	32.2	-22.5	53.11	-	-	74	-20.89	359	100	H
* 4.872	41.57	PK2	34.2	-30.6	45.17	-	-	74	-28.83	359	100	H
* 15.831	35.12	PK2	40.7	-20.1	55.72	-	-	74	-18.28	359	100	H
* 15.83	34.98	PK2	40.7	-20.1	55.58	-	-	74	-18.42	5	206	H
* 15.829	23.49	MAV1	40.7	-20.1	44.09	54	-9.91	-	-	5	206	H
3.463	41.39	PK2	32.8	-31.2	42.99	-	-	-	-	359	100	V
6.857	39.01	PK2	35.6	-27.5	47.11	-	-	-	-	359	100	H
9.944	35.43	PK2	37	-23.9	48.53	-	-	-	-	359	100	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**HIGH CHANNEL
 HORIZONTAL**

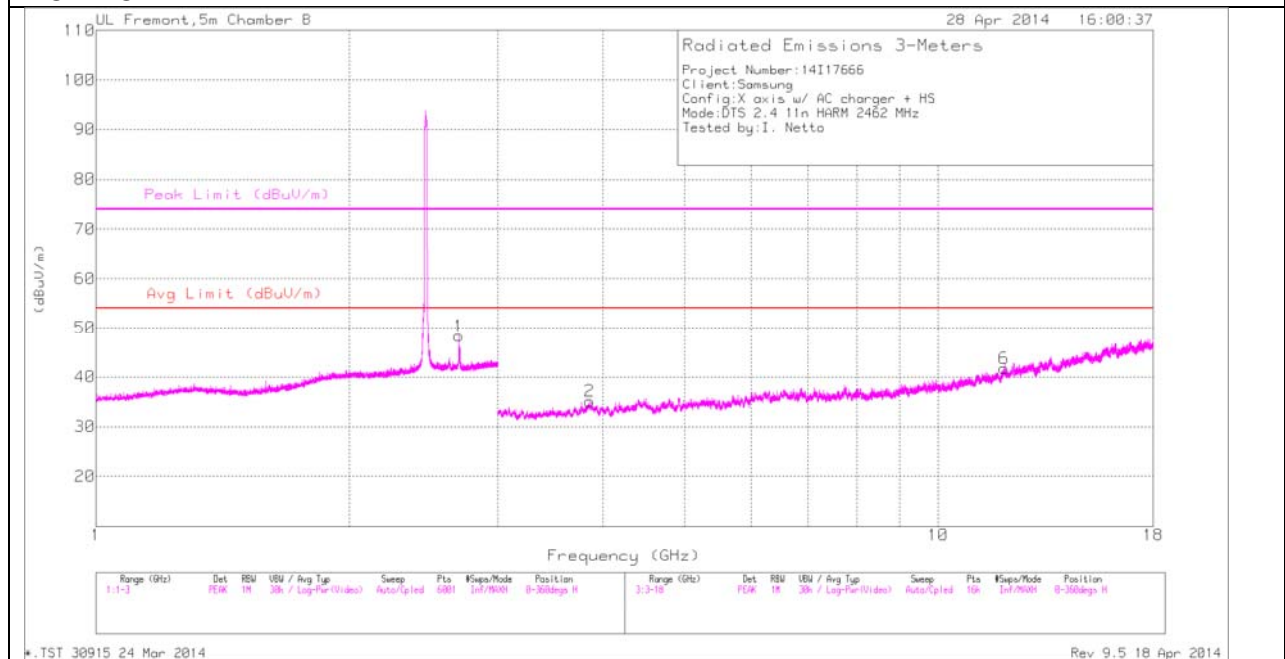

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**HIGH CHANNEL
 VERTICAL**

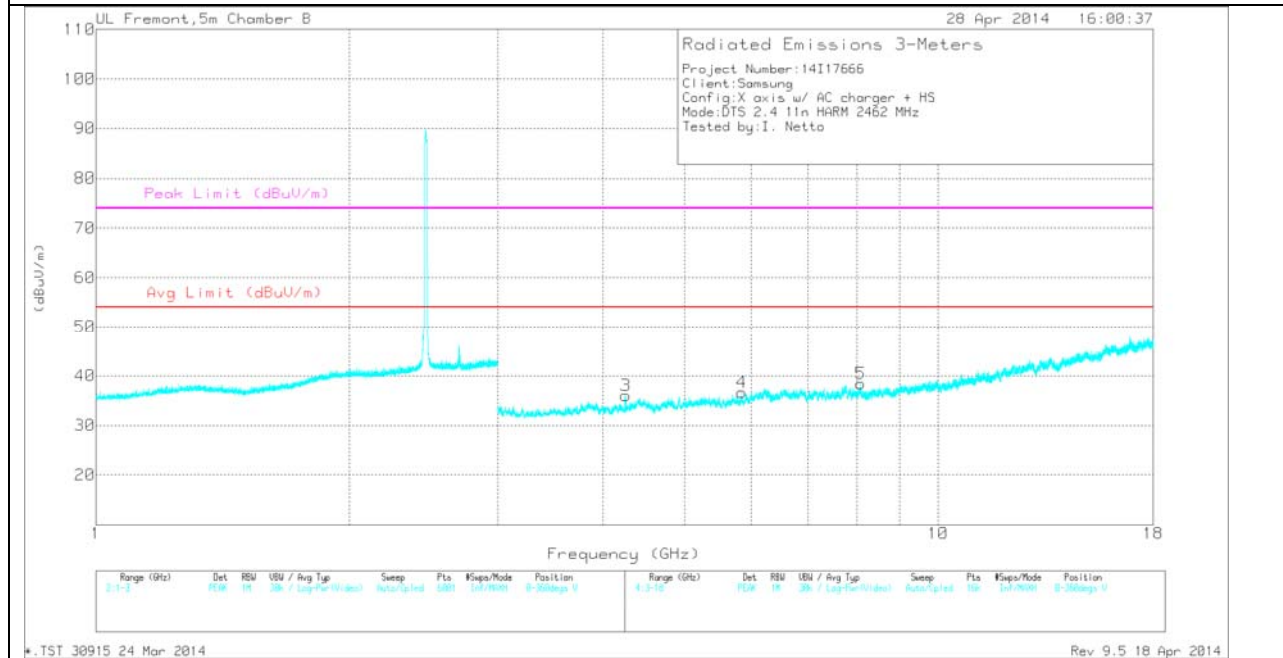

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.698	38.65	PK	32.2	-22.5	0	48.35	-	-	74	-25.65	0-360	202	H
2	* 3.857	31.61	PK	33.7	-30.2	0	35.11	-	-	74	-38.89	0-360	202	H
6	* 11.975	25.2	PK	38.7	-22.2	0	41.7	-	-	74	-32.3	0-360	99	H
3	* 4.256	33.21	PK	33.6	-30.8	0	36.01	-	-	74	-37.99	0-360	202	V
5	* 8.089	28.62	PK	35.7	-25.9	0	38.42	-	-	74	-35.58	0-360	99	V
4	5.845	31.06	PK	34.8	-29.2	0	36.66	-	-	-	-	0-360	202	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.698	47.49	PK2	32.2	-22.5	57.19	-	-	74	-16.81	253	157	H
* 2.698	33.39	MAv1	32.2	-22.5	43.09	54	-10.91	-	-	253	157	H
* 3.855	41.04	PK2	33.7	-30.2	44.54	-	-	74	-29.46	1	100	H
* 11.973	34.89	PK2	38.7	-22.3	51.29	-	-	74	-22.71	1	100	H
* 4.258	40.47	PK2	33.6	-30.9	43.17	-	-	74	-30.83	1	100	V
* 8.092	37.97	PK2	35.7	-25.9	47.77	-	-	74	-26.23	1	100	V
5.847	40.25	PK2	34.8	-29.2	45.85	-	-	-	-	1	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

10.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

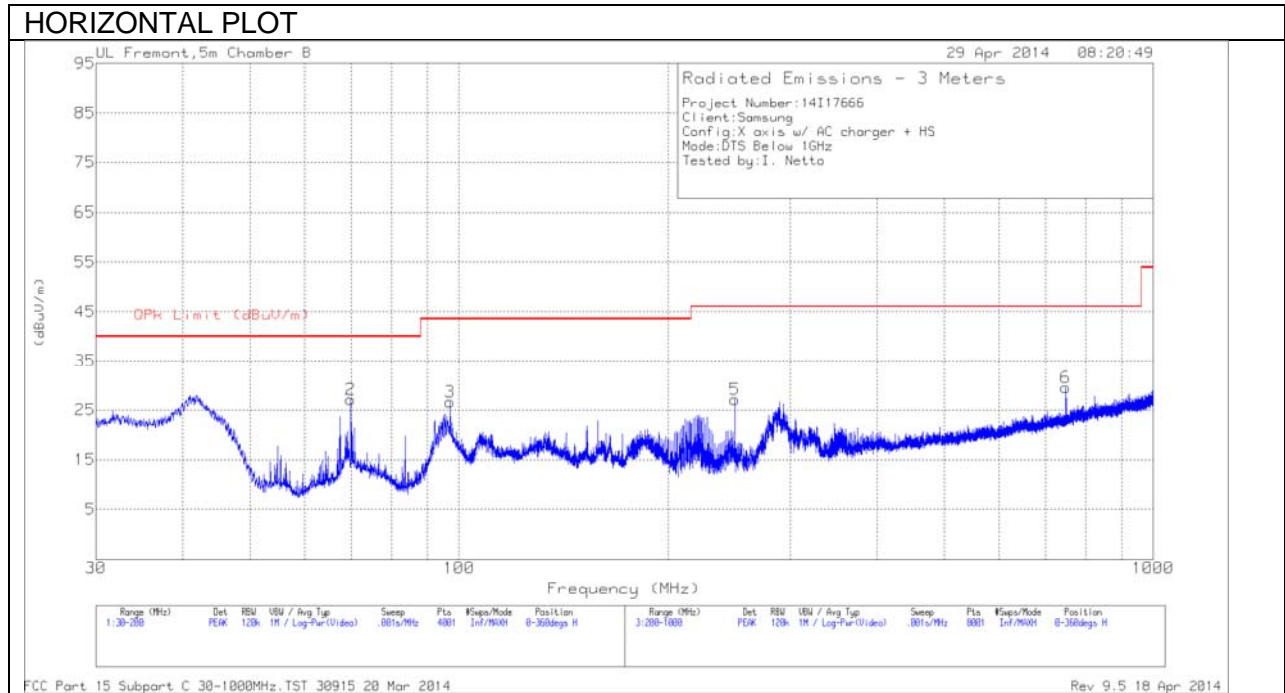

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

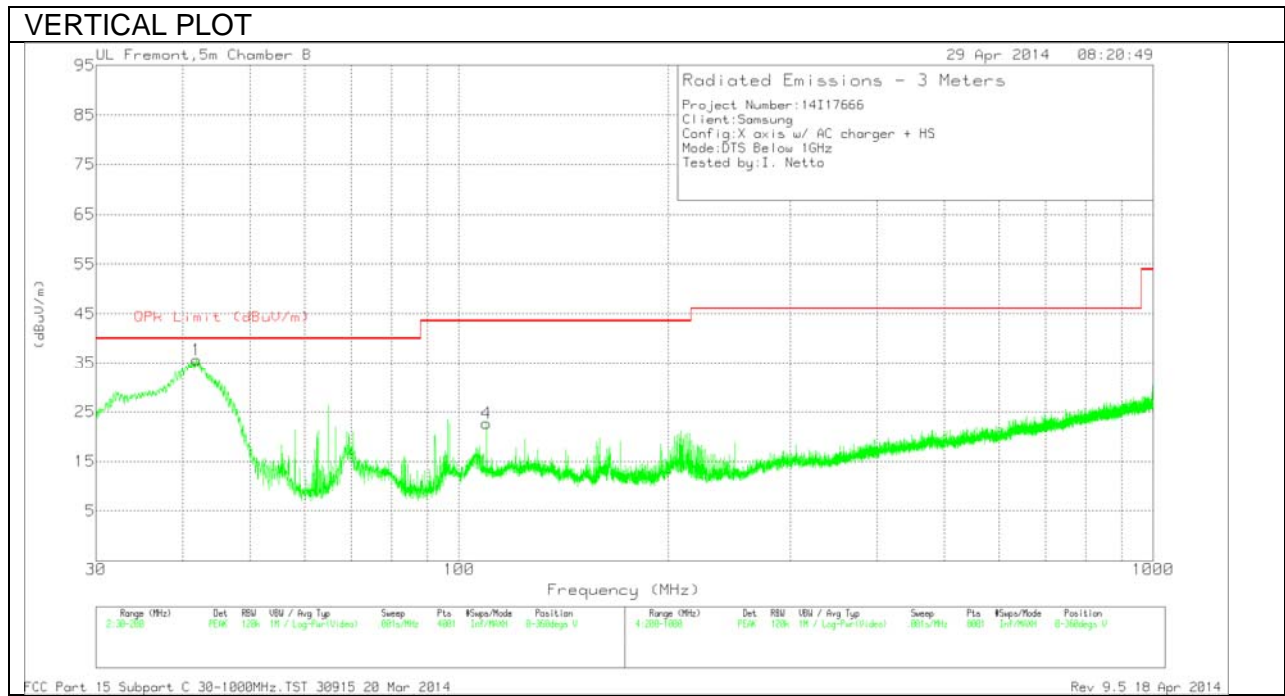

Below 1G Data

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AFT243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
4	* 109.475	38.18	PK	12.5	-28	22.68	43.52	-20.84	0-360	101	V
5	* 249.6	42.03	PK	11.6	-26.5	27.13	46.02	-18.89	0-360	101	H
1	41.9	51.72	PK	12.6	-28.7	35.62	40	-4.38	0-360	101	V
2	69.8225	47.43	PK	8.1	-28.4	27.13	40	-12.87	0-360	400	H
3	97.15	45.4	PK	9.3	-28.1	26.6	43.52	-16.92	0-360	400	H
6	748.8	33.19	PK	20.6	-24.2	29.59	46.02	-16.43	0-360	200	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

FCC Part 15 Subpart C 30-1000MHz.TST 30915 20 Mar 2014

11. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4 2009.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.1725	48.57	PK	1.2	0	49.77	64.8	-15.03	-	-
2	.1725	27.1	Av	1.2	0	28.3	-	-	54.8	-26.5
3	.3795	37.9	PK	.4	0	38.3	58.3	-20	-	-
4	.3795	19.17	Av	.4	0	19.57	-	-	48.3	-28.73
5	.501	35.09	PK	.3	0	35.39	56	-20.61	-	-
6	.501	22.45	Av	.3	0	22.75	-	-	46	-23.25
7	.564	40.25	PK	.3	0	40.55	56	-15.45	-	-
8	.564	34.13	Av	.3	0	34.43	-	-	46	-11.57
9	1.1985	29.86	PK	.2	.1	30.16	56	-25.84	-	-
10	1.1985	19.96	Av	.2	.1	20.26	-	-	46	-25.74
11	2.0085	27.9	PK	.2	.1	28.2	56	-27.8	-	-
12	2.0085	15.63	Av	.2	.1	15.93	-	-	46	-30.07
13	7.251	27.72	PK	.2	.1	28.02	60	-31.98	-	-
14	7.251	11.21	Av	.2	.1	11.51	-	-	50	-38.49
15	29.2875	28.2	PK	.3	.3	28.8	60	-31.2	-	-
16	29.2875	14.05	Av	.3	.3	14.65	-	-	50	-35.35
17	29.787	28.78	PK	.3	.3	29.38	60	-30.62	-	-
18	29.787	15.24	Av	.3	.3	15.84	-	-	50	-34.16


Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
19	.168	47.37	PK	1.3	0	48.67	65.1	-16.43	-	-
20	.168	21.94	Av	1.3	0	23.24	-	-	55.1	-31.86
21	.312	41.17	PK	.6	0	41.77	59.9	-18.13	-	-
22	.312	15.93	Av	.6	0	16.53	-	-	49.9	-33.37
23	.51	32.67	PK	.4	0	33.07	56	-22.93	-	-
24	.51	18.76	Av	.4	0	19.16	-	-	46	-26.84
25	.564	41.2	PK	.3	0	41.5	56	-14.5	-	-
26	.564	29.18	Av	.3	0	29.48	-	-	46	-16.52
27	.69	29.98	PK	.3	0	30.28	56	-25.72	-	-
28	.69	12.68	Av	.3	0	12.98	-	-	46	-33.02
29	1.068	21.99	PK	.3	.1	22.39	56	-33.61	-	-
30	1.068	10.04	Av	.3	.1	10.44	-	-	46	-35.56
31	2.0625	18.52	PK	.2	.1	18.82	56	-37.18	-	-
32	2.0625	2.66	Av	.2	.1	2.96	-	-	46	-43.04
33	3.381	18.7	PK	.2	.1	19	56	-37	-	-
34	3.381	5.07	Av	.2	.1	5.37	-	-	46	-40.63
35	4.848	19.75	PK	.2	.1	20.05	56	-35.95	-	-
36	4.848	4.18	Av	.2	.1	4.48	-	-	46	-41.52
37	8.376	29.7	PK	.2	.1	30	60	-30	-	-
38	8.376	10.1	Av	.2	.1	10.4	-	-	50	-39.6
39	29.238	28.78	PK	.3	.3	29.38	60	-30.62	-	-
40	29.238	16.15	Av	.3	.3	16.75	-	-	50	-33.25
41	29.967	28.97	PK	.3	.3	29.57	60	-30.43	-	-
42	29.967	15.13	Av	.3	.3	15.73	-	-	50	-34.27

PK - Peak detector
 Av - average detection

LINE 1 RESULTS

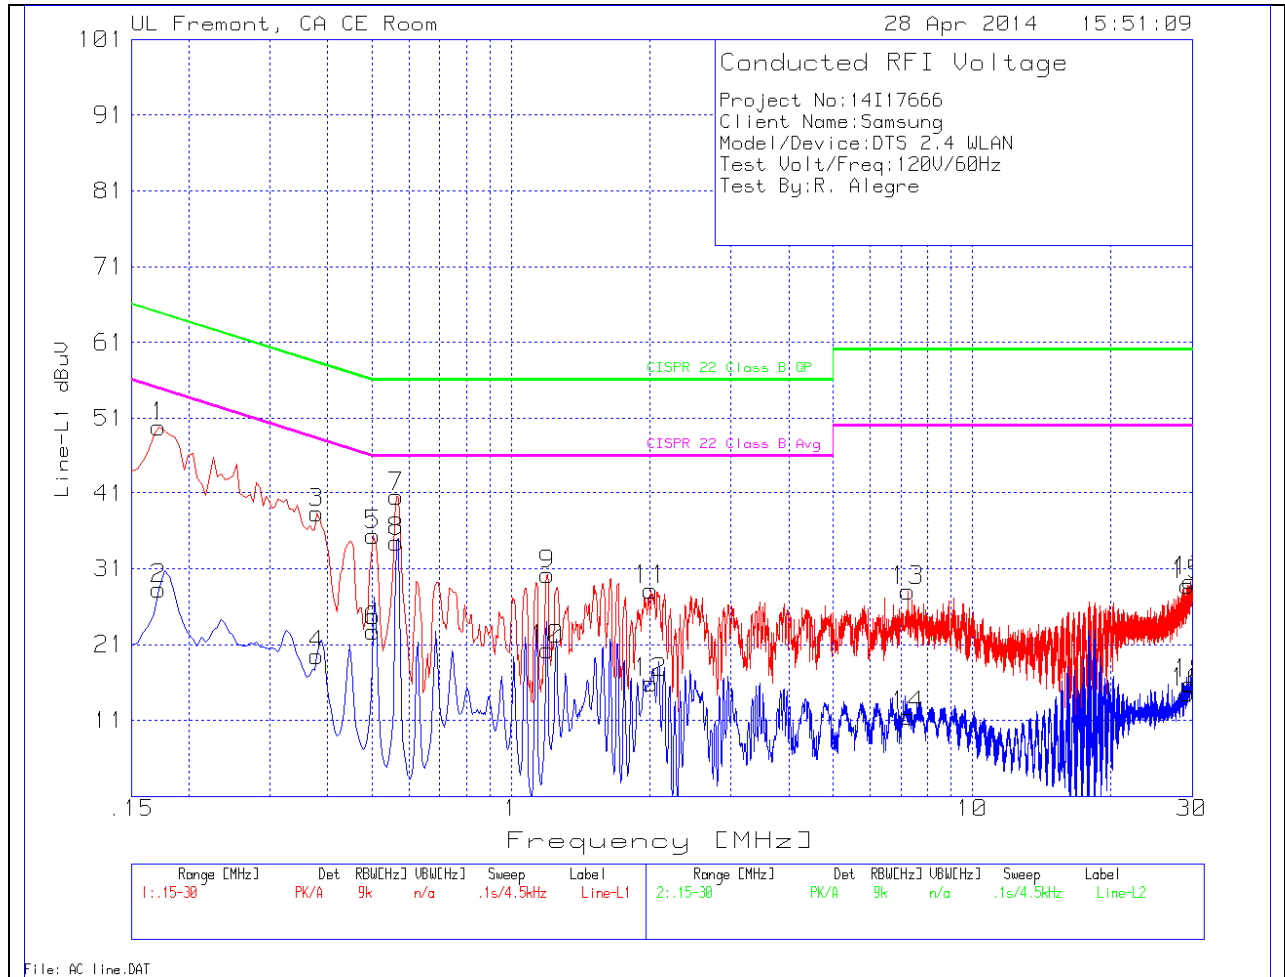

LINE 2 RESULTS

