



FCC CFR47 PART 15 SUBPART C

Bluetooth

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n and NFC

MODEL NUMBER : SM-G390Y

FCC ID: A3LSMG390Y

REPORT NUMBER: 4787873630-E3V1

ISSUE DATE: MAR 20, 2017

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA**

Prepared by

**UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433**



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	03/20/17	Initial issue	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
1.1. INTRODUCTION OF TEST DATA REUSE.....	6
1.2. DIFFERENCE.....	6
1.3. SPOT CHECK VERIFICATION DATA.....	6
1.4. REFERENCE DETAIL.....	7
3. TEST METHODOLOGY	8
4. FACILITIES AND ACCREDITATION	8
5. CALIBRATION AND UNCERTAINTY	8
5.1. MEASURING INSTRUMENT CALIBRATION	8
5.2. SAMPLE CALCULATION.....	8
5.3. MEASUREMENT UNCERTAINTY.....	8
6. EQUIPMENT UNDER TEST	9
6.1. DESCRIPTION OF EUT.....	9
6.2. MAXIMUM OUTPUT POWER.....	9
6.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	9
6.4. WORST-CASE CONFIGURATION AND MODE.....	9
6.5. DESCRIPTION OF TEST SETUP.....	10
7. TEST AND MEASUREMENT EQUIPMENT	12
8. REFERENCE MEASUREMENT RESULTS	13
8.1. 20 dB AND 99% BANDWIDTH.....	13
8.1.1. BASIC DATA RATE GFSK MODULATION.....	13
8.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION	13
8.1.3. ENHANCED DATA RATE 8PSK MODULATION.....	13
8.1.4. 20 dB AND 99% BANDWIDTH PLOTS.....	14
9. SUMMARY TABLE	17
10. ANTENNA PORT TEST RESULTS	18
10.1. HOPPING FREQUENCY SEPARATION.....	18
10.2. NUMBER OF HOPPING CHANNELS	19
10.3. AVERAGE TIME OF OCCUPANCY.....	21
10.4. OUTPUT POWER.....	25
10.4.1. BASIC DATA RATE GFSK MODULATION	25
10.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION	25
10.4.3. ENHANCED DATA RATE 8PSK MODULATION	25

10.4.4.	OUTPUT POWER PLOTS.....	26
10.5.	AVERAGE POWER.....	29
10.5.1.	BASIC DATA RATE GFSK MODULATION.....	29
10.5.2.	DATA RATE PI/4-DQPSK MODULATION.....	29
10.5.3.	ENHANCED DATA RATE 8PSK MODULATION.....	29
10.6.	CONDUCTED SPURIOUS EMISSIONS.....	30
10.6.1.	BASIC DATA RATE GFSK MODULATION.....	31
11.	RADIATED TEST RESULTS.....	43
11.1.	LIMITS AND PROCEDURE.....	43
11.2.	TRANSMITTER ABOVE 1 GHz.....	45
11.2.1.	BASIC DATA RATE GFSK MODULATION.....	45
11.2.2.	ENHANCED DATA RATE 8PSK MODULATION.....	55
11.3.	WORST-CASE BELOW 1 GHz.....	65
12.	AC POWER LINE CONDUCTED EMISSIONS.....	67
13.	SETUP PHOTOS.....	72

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n and NFC
MODEL NUMBER: SM-G390Y
SERIAL NUMBER: R38HC0238JF (RADIATED, Original model);
420044acec93b391, 4200c84ccaf0a3bd (CONDUCTED, Original model)
R38J10TN4JF(RADIATED, A3LSMG390Y)
DATE TESTED: JAN 18, 2017 - FEB 03, 2017 (Original Test)
FEB 28, 2017 – MAR 02, 2017 (A3LSMG390Y)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMG390F, DSS BT(FCC CFR 47 Part 15C). And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMG390Y shares the same enclosure and circuit board as FCC ID: A3LSMTG390F. The BT circuitry and layout are identical between these two units. The BT antennas and surrounding circuitry are the same between these two units.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG390F remains representative of FCC ID: A3LSMG390Y. The test data of FCC ID: A3LSMG390F being submitted for this application to cover BT features.

Due to difference of charger, radiated emission under 1GHz and AC line conducted test were performed newly.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-G390F Results	SM-G390Y Results		
					FCC ID : A3LSMG390F	FCC ID : A3LSMG390Y		
DSS BT (2.4GHz)	Band Edge	8PSK	2480 MHz	74 dBuV/m	69.56 dBuV/m	60.84 dBuV/m	-8.72 dBc	
	RSE	GFSK	2402 MHz	74 dBuV/m	39.98 dBuV/m	40.72 dBuV/m	0.74 dBc	Noise floor level (Both data)

Comparison of two models, higher deviation is within 3dB range and all test results are under FCC Technical Limits.

1.4. REFERENCE DETAIL

Reference application that contains the reused reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
DTS	A3LSMG390F	Grant	4787833362-E2V1	Test	FCC Report BLE All sections (Except Section 10.3, 11)
DSS	A3LSMG390F	Grant	4787833362-E3V1	Test	FCC Report BT / All sections (Except Section 10.3, 11)
			4787833362-S1V2	RF Exposure	FCC Report SAR / Section 9.6, 10.8
DXX	A3LSMG390F	Grant	4787833362-E5V2	Test	FCC Report NFC / All sections (Except Section 8.1.2, 9)
PCE	A3LSMG390F	Grant	4787833362-E6V1	Test	FCC Report WWAN / All sections
			4787833362-S1V2	RF Exposure	FCC Report SAR / Section for GSM 850 (9.1, 10.1), GSM 1900 (9.1, 10.2), WCDMA B2 (9.2, 10.3), WCDMA B5 (9.2, 10.4), LTE B2 (9.3, 10.5),

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. FCC DA 00-705 Filing and measurement guidelines for FHSS systems
4. ANSI C63.10-2013.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n and NFC.
 This test report addresses the DSS (BT) operational mode.

6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	8.730	7.464
		Peak	9.478	8.867
	Enhanced Pi/4-DPSK	Average	7.304	5.375
		Peak	9.714	9.363
	Enhanced 8PSK	Average	7.325	5.401
		Peak	10.340	10.814

6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of 2.27 dBi.

6.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 9.5.

6.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50HWE	DK4H630HS/A -E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	0.8m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.0m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
 Test software in the Hidden menu mode to enable BT communications.

SETUP DIAGRAM FOR TESTS

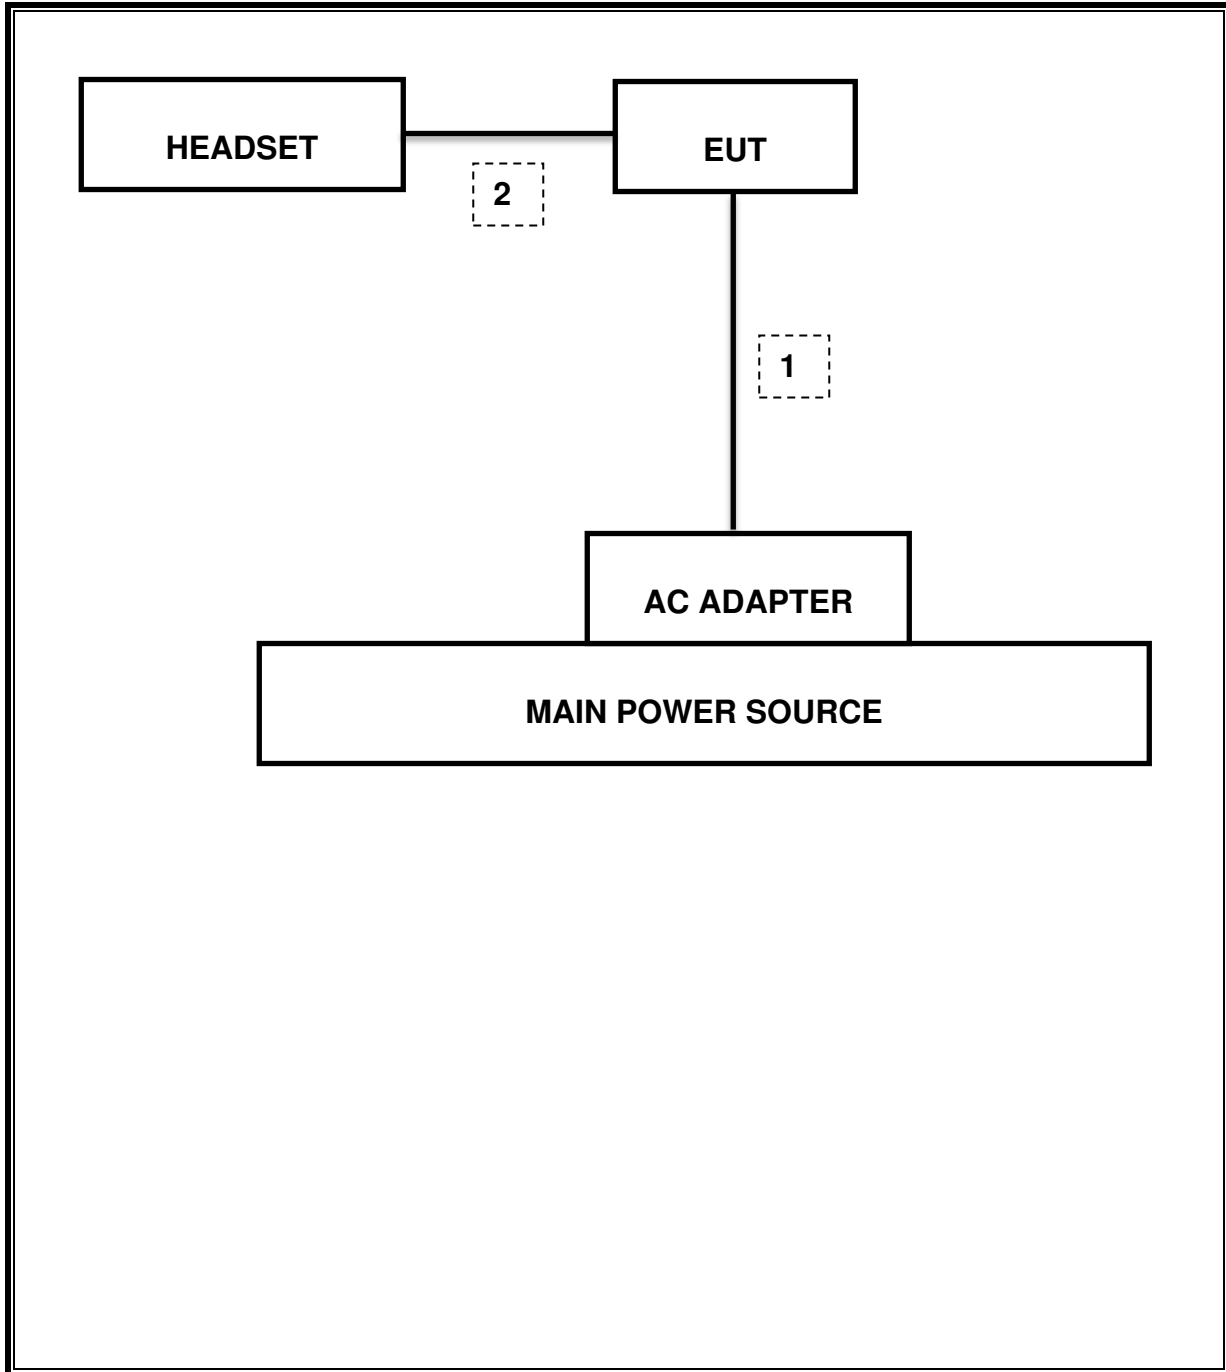

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	10-14-18
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-25-17
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3117	00168724	06-17-17
Antenna, Horn, 18 GHz	ETS	3117	00168717	06-17-17
Antenna, Horn, 40 GHz	ETS	3116C	00166155	11-30-17
Antenna, Horn, 40 GHz	ETS	3116C-PA	00168841	12-15-17
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-18-17
Average Power Sensor	R&S	NRP-Z91	102681	08-16-17
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
LISN	R&S	ENV-216	101836	08-16-17
LISN	R&S	ENV-216	101837	08-16-17
Attenuator	PASTERNAK	PE7087-10	A009	08-16-17
Combiner	WEINSCHEL	1575	2151	08-17-17
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

8. REFERENCE MEASUREMENT RESULTS

8.1. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to \geq 1% of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

8.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [KHz]	99% Bandwidth [KHz]
Low	2402	988.900	891.820
Mid	2441	965.800	863.670
High	2480	919.100	859.400
Worst		988.900	891.820

8.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.280	1.165
Mid	2441	1.284	1.164
High	2480	1.287	1.132
Worst		1.287	1.165

8.1.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.258	1.163
Mid	2441	1.255	1.162
High	2480	1.255	1.164
Worst		1.258	1.164

8.1.4. 20 dB AND 99% BANDWIDTH PLOTS


GFSK BANDWIDTH

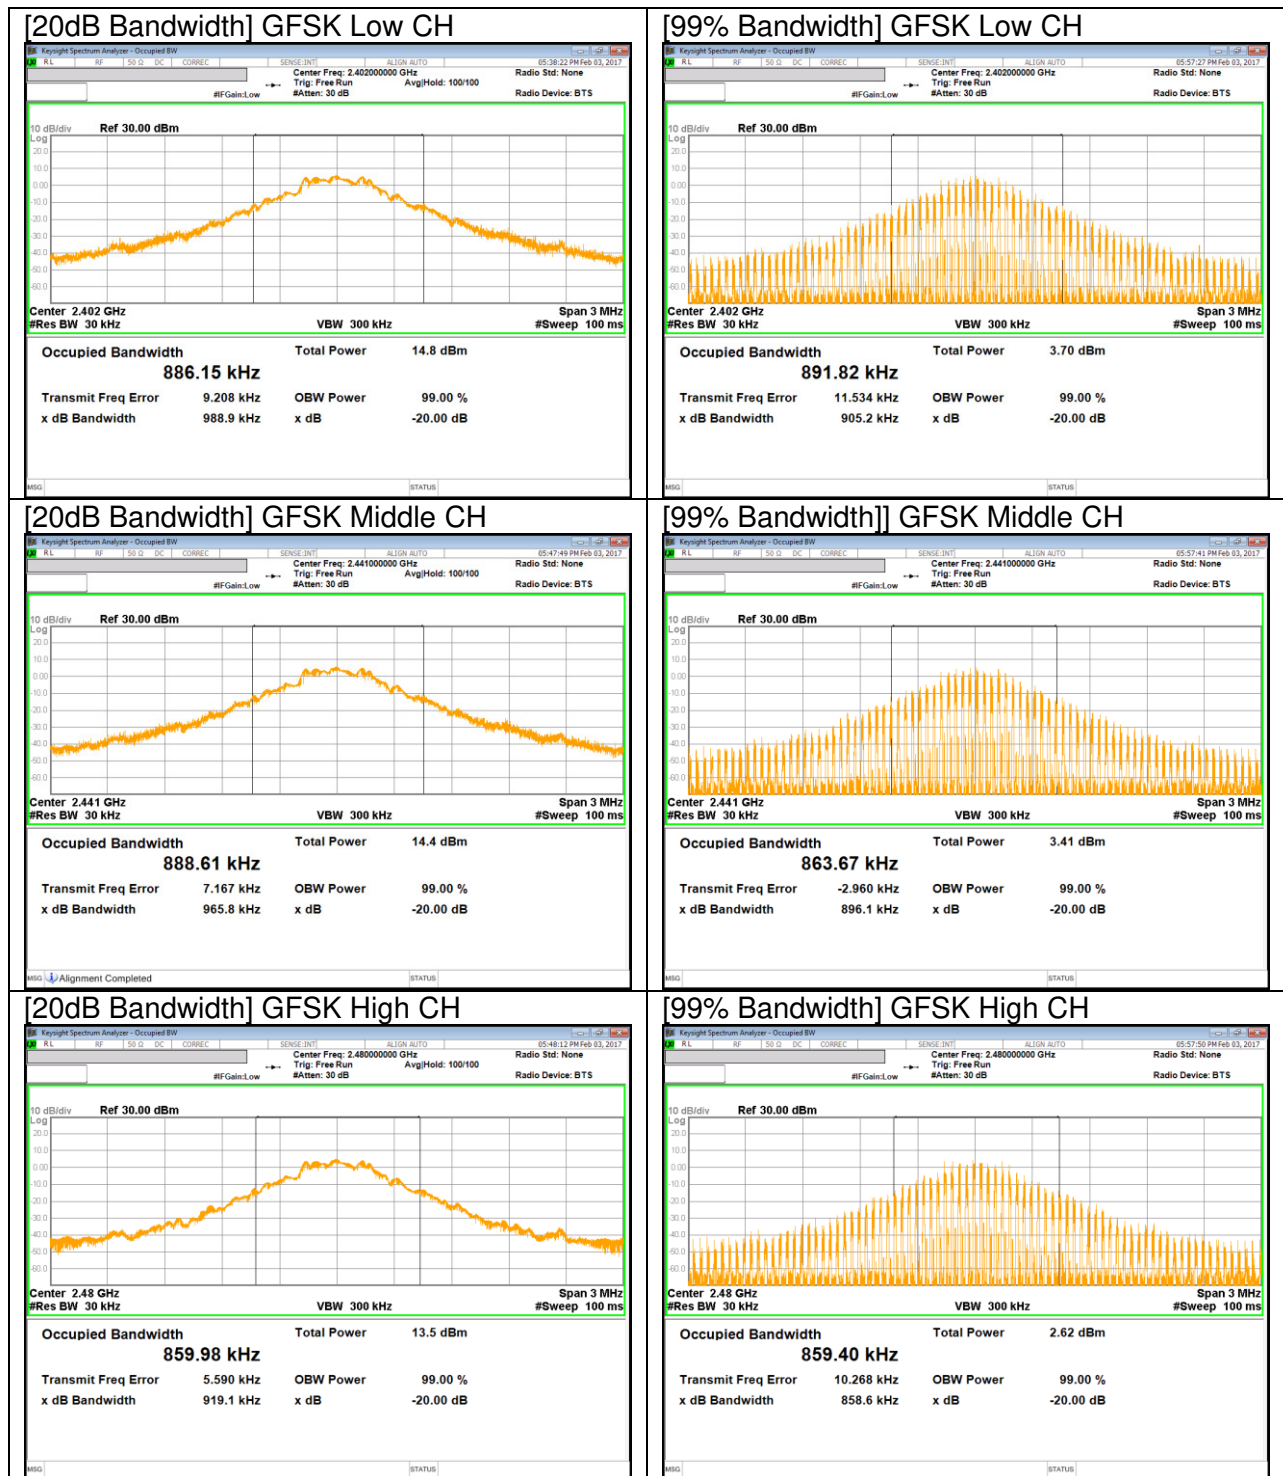

Pi/4-DQPSK BANDWIDTH

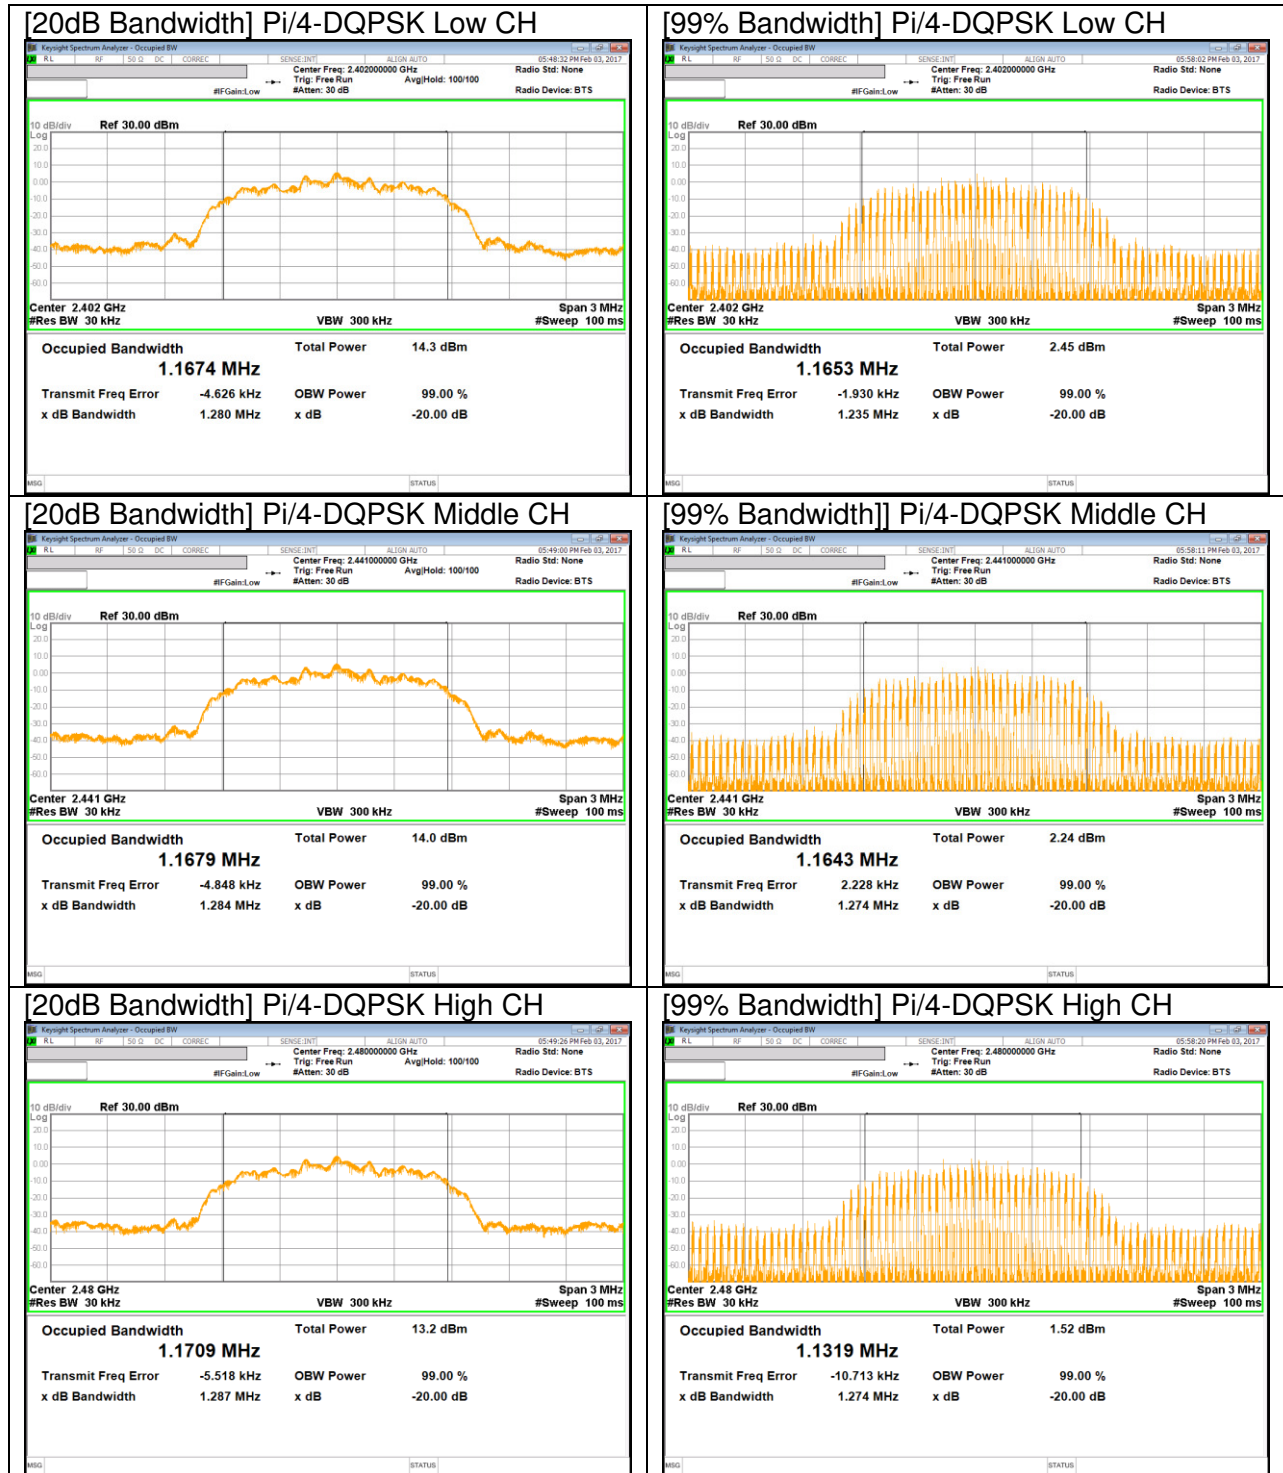

8PSK BANDWIDTH

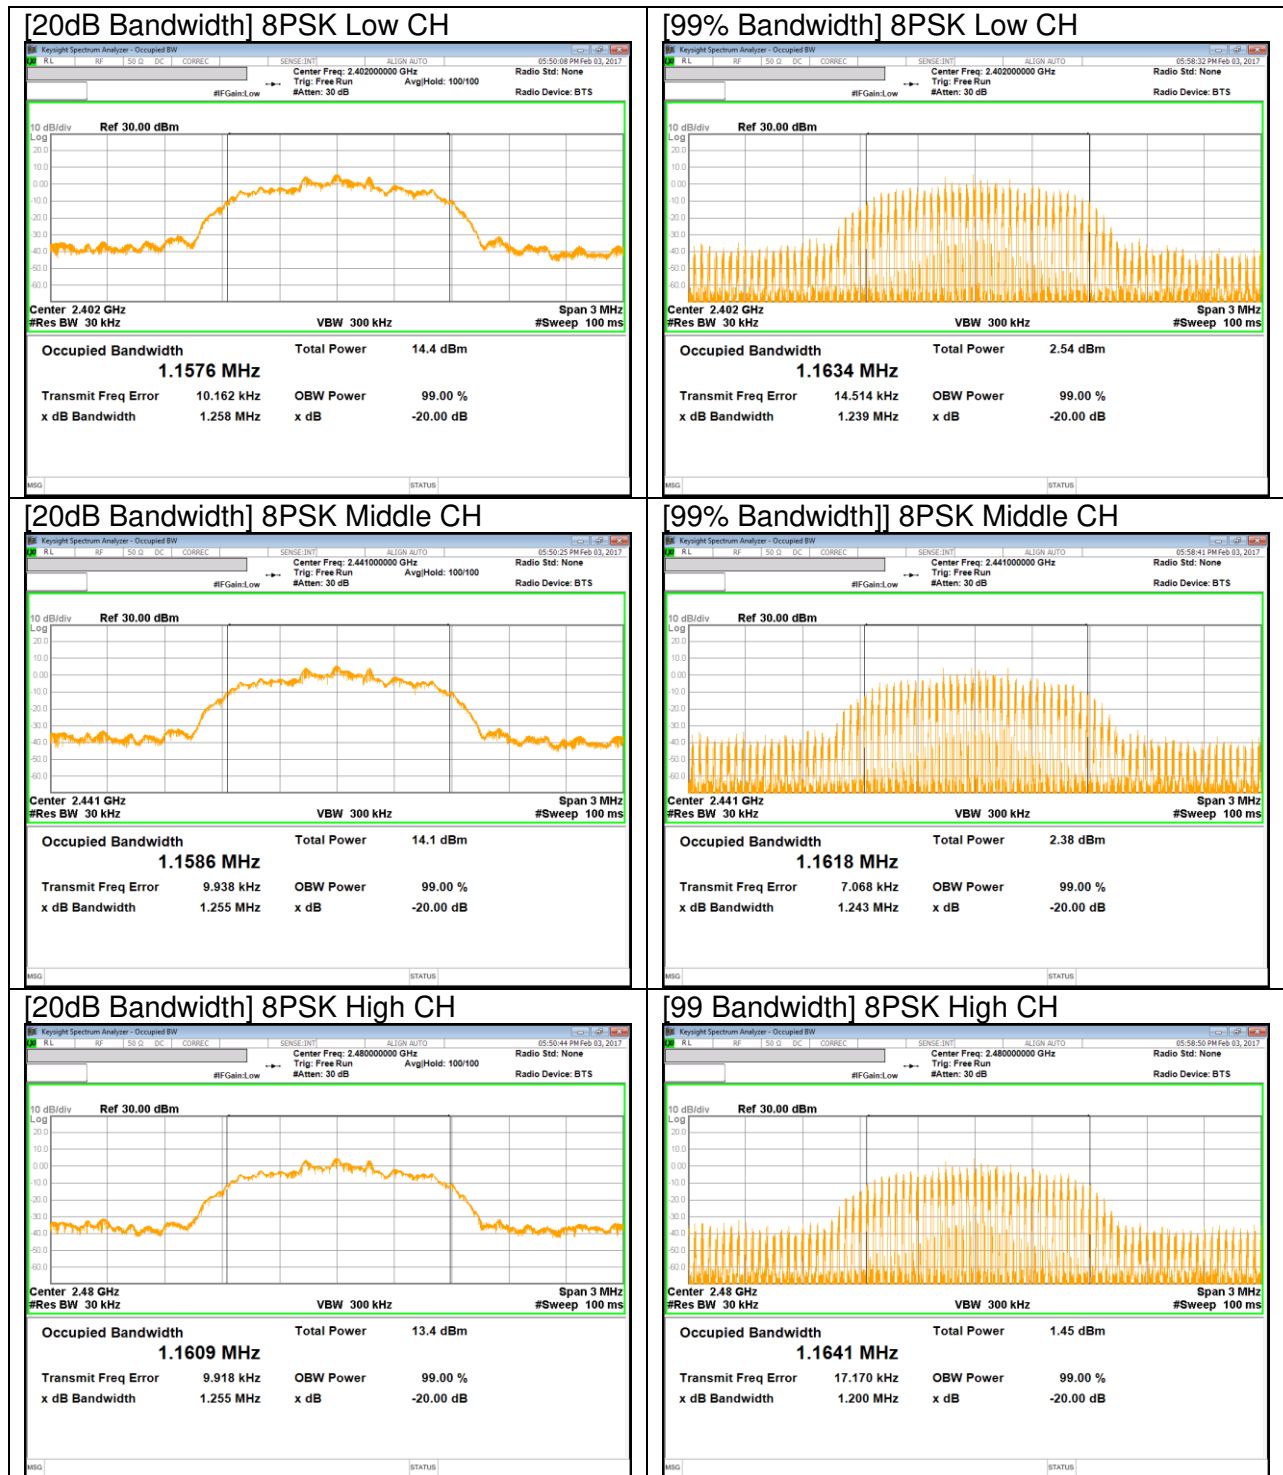

9. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-32.824 dBm
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	10.34 dBm (Peak)
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	0.37505 sec
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	52.84 dBuV (Qp)
15.205, 15.209	Radiated Spurious Emission	< 74dBuV/m	Radiated	Pass	69.56 dBuV/m (Pk)

10. ANTENNA PORT TEST RESULTS

10.1. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT

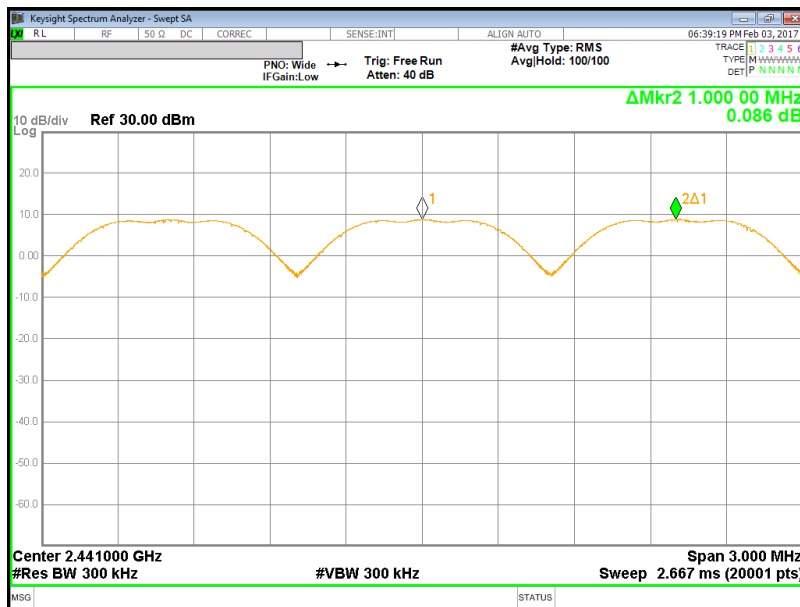

10.2. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS

NUMBER OF HOPPING CHANNELS (100 MHZ SPAN)

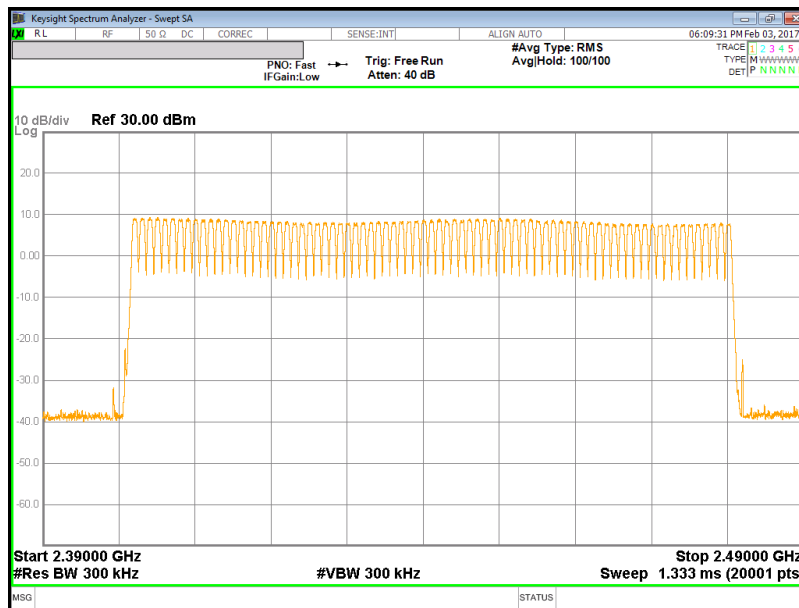



10.3. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.

RESULTS

DH Packet	Pulse Width [msec]	Number of Pulses in 3.16 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK Normal					
DH1	0.380	32	0.121696	0.4	-0.2783
DH3	1.636	17	0.278120	0.4	-0.1219
DH5	2.885	13	0.375050	0.4	-0.0250
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.380	8	0.030424	0.4	-0.36958
DH3	1.636	4.25	0.069530	0.4	-0.33047
DH5	2.885	3.25	0.093763	0.4	-0.30624

DH3

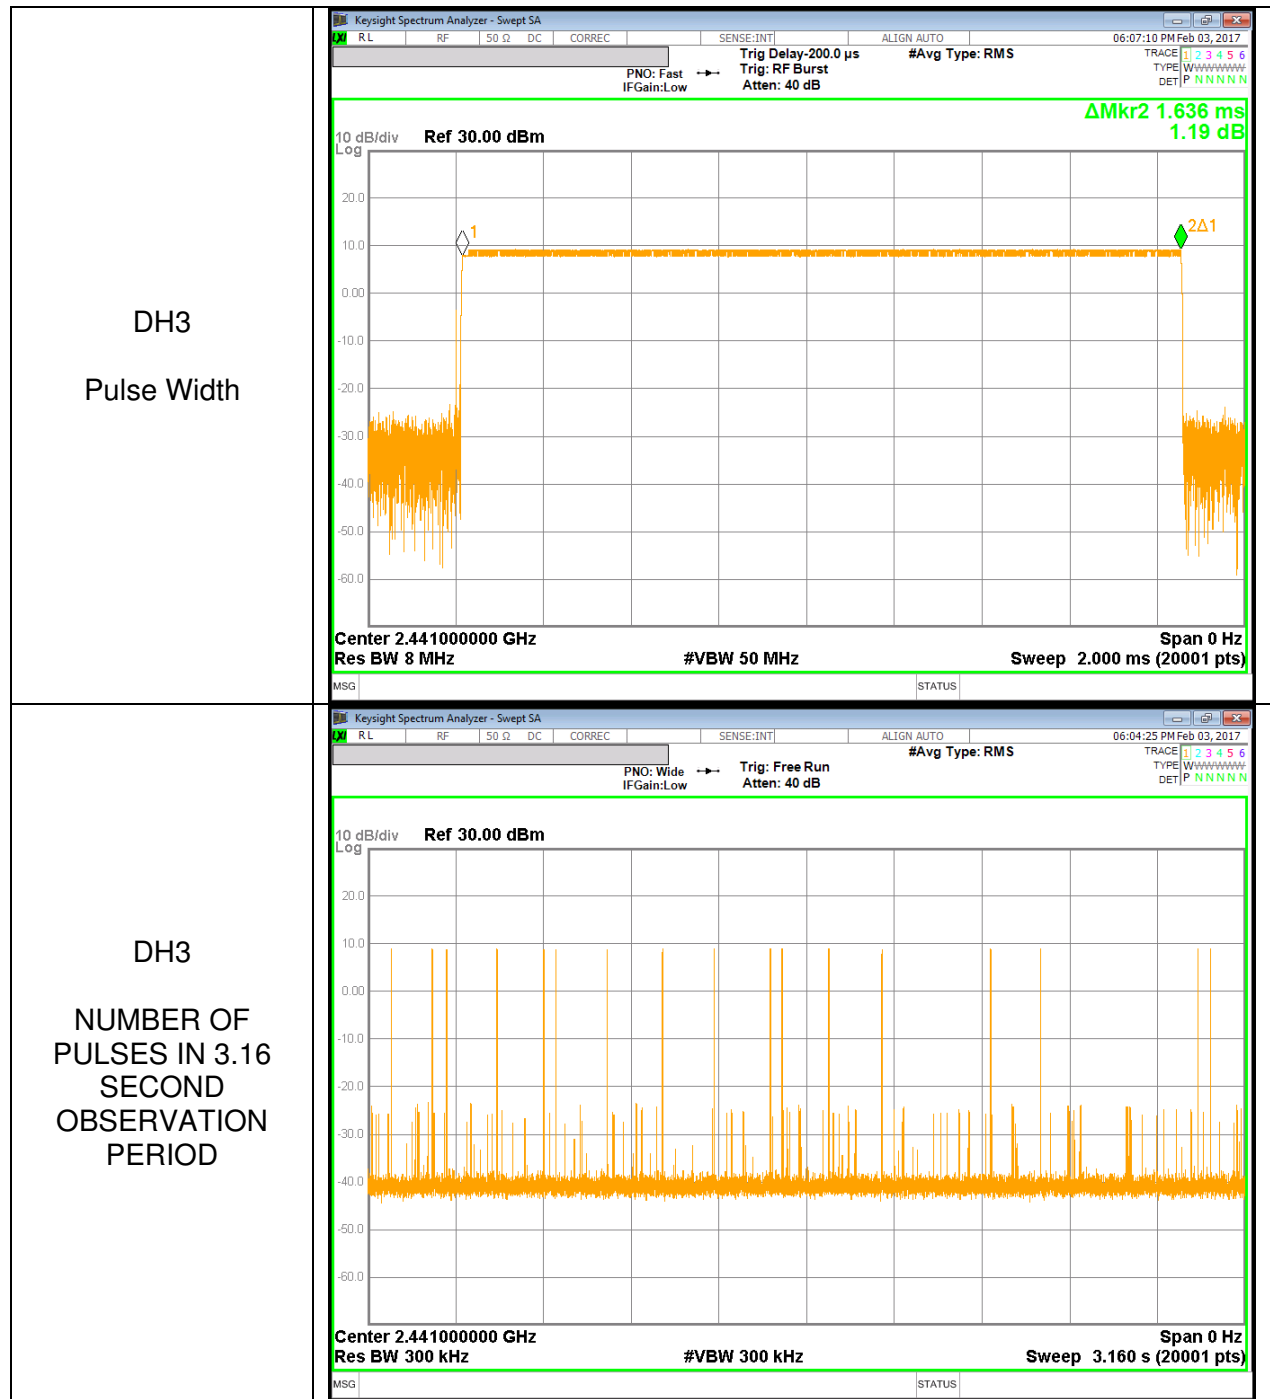

10.4. OUTPUT POWER

LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

10.4.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	9.478	21	-11.522
Middle	2441	9.132	21	-11.868
High	2480	8.153	21	-12.847
Worst		9.478	21	-11.522

10.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	9.714	21	-11.286
Middle	2441	9.359	21	-11.641
High	2480	8.317	21	-12.683
Worst		9.714	21	-11.286

10.4.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	10.340	21	-10.660
Middle	2441	10.011	21	-10.989
High	2480	8.935	21	-12.065
Worst		10.340	21	-10.660

10.4.4. OUTPUT POWER PLOTS

GFSK OUTPUT POWER

<p>GFSK Low CH</p>	<p>Key: Keysight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: Free Run Atten: 40 dB #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.402 162 5 GHz 9.478 dBm Ref 30.00 dBm 10 dB/div Log Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>GFSK Middle CH</p>	<p>Key: Keysight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: Free Run Atten: 40 dB #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.441 201 0 GHz 9.132 dBm Ref 30.00 dBm 10 dB/div Log Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>GFSK High CH</p>	<p>Key: Keysight Spectrum Analyzer - Swept SA PNO: Fast IFGain:Low Trig: Free Run Atten: 40 dB #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.479 831 5 GHz 8.153 dBm Ref 30.00 dBm 10 dB/div Log Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

Pi/4-DPSK OUTPUT POWER

<p>Pi/4-DPSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref: 30.00 dBm Mkr1 2.402 100 5 GHz 9.714 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref: 30.00 dBm Mkr1 2.440 879 5 GHz 9.359 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref: 30.00 dBm Mkr1 2.479 977 5 GHz 8.317 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

8PSK OUTPUT POWER

<p>8PSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.401 911 5 GHz 10.340 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.440 871 0 GHz 10.011 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 30.00 dBm Mkr1 2.480 039 0 GHz 8.935 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

10.5. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

10.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	8.730	7.46
Middle	2441	8.412	6.94
High	2480	7.529	5.66

10.5.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.304	5.38
Middle	2441	7.033	5.05
High	2480	6.253	4.22

10.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	7.325	5.40
Middle	2441	7.052	5.07
High	2480	6.266	4.23

10.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


RESULTS

10.6.1. BASIC DATA RATE GFSK MODULATION

GFSK Mode

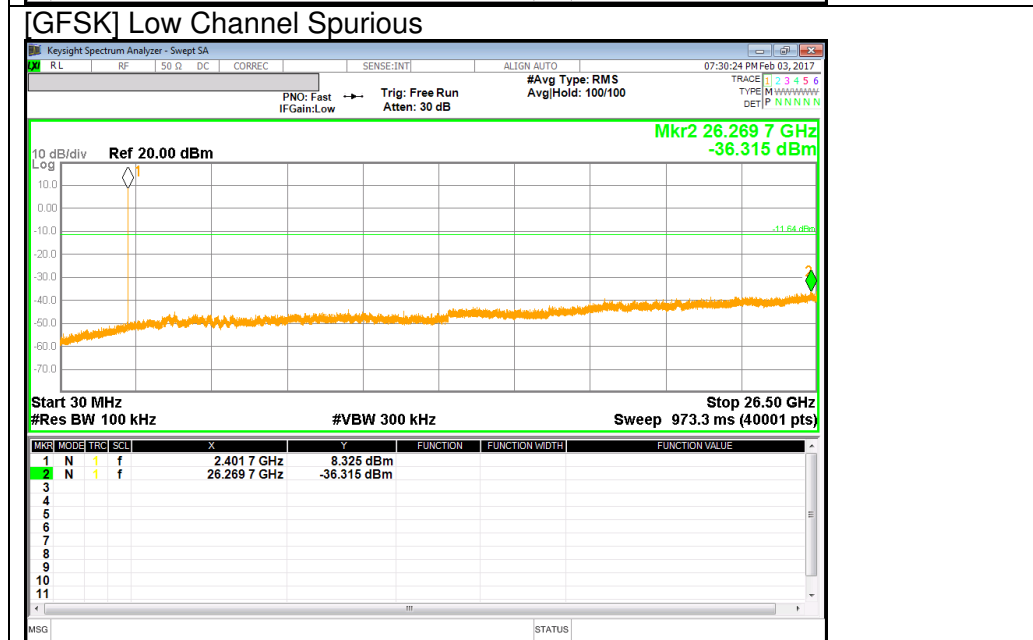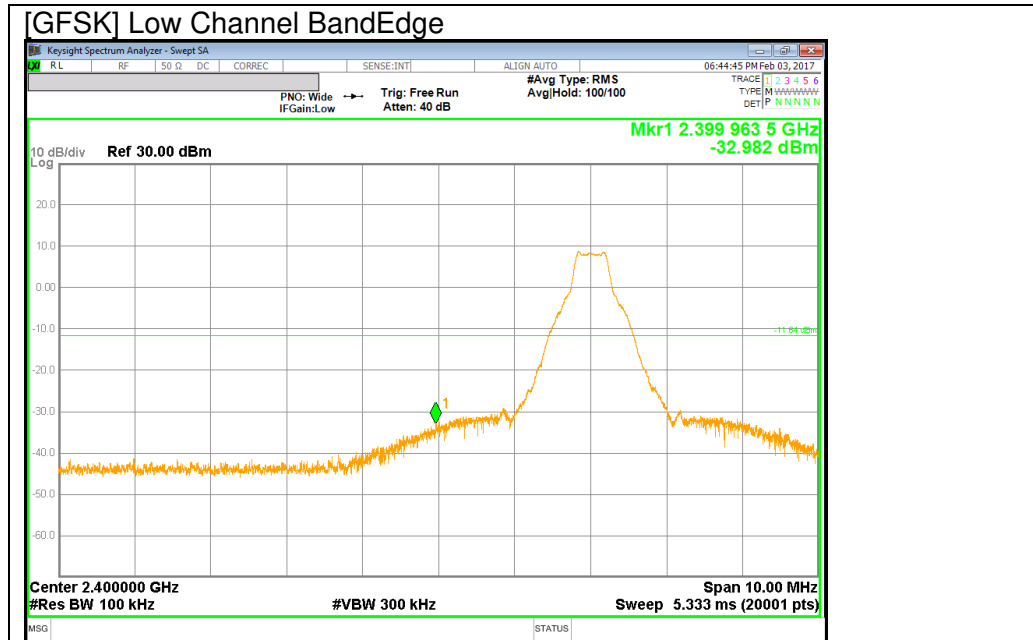


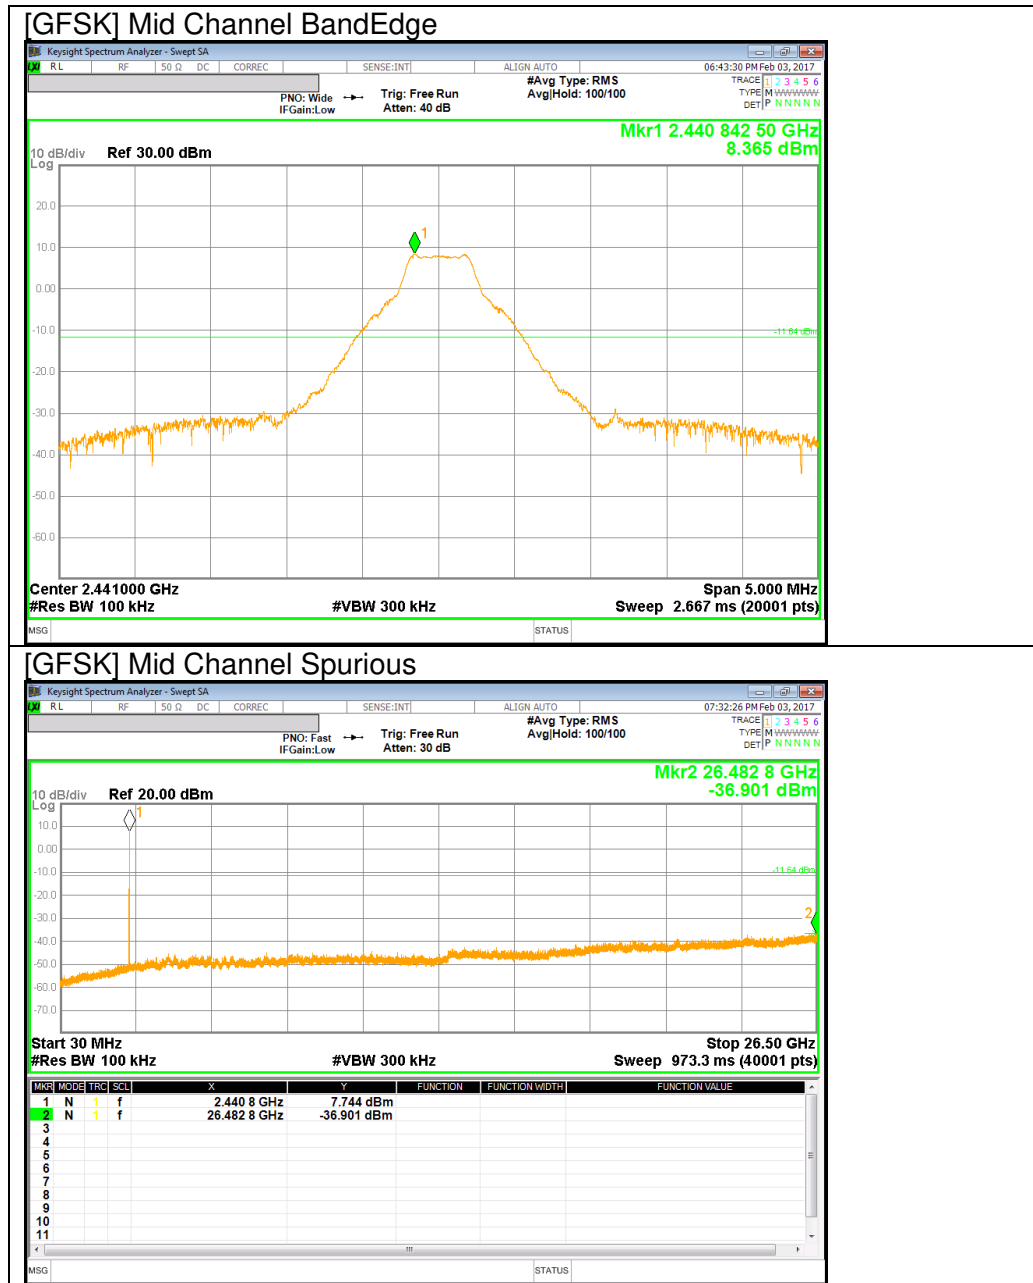

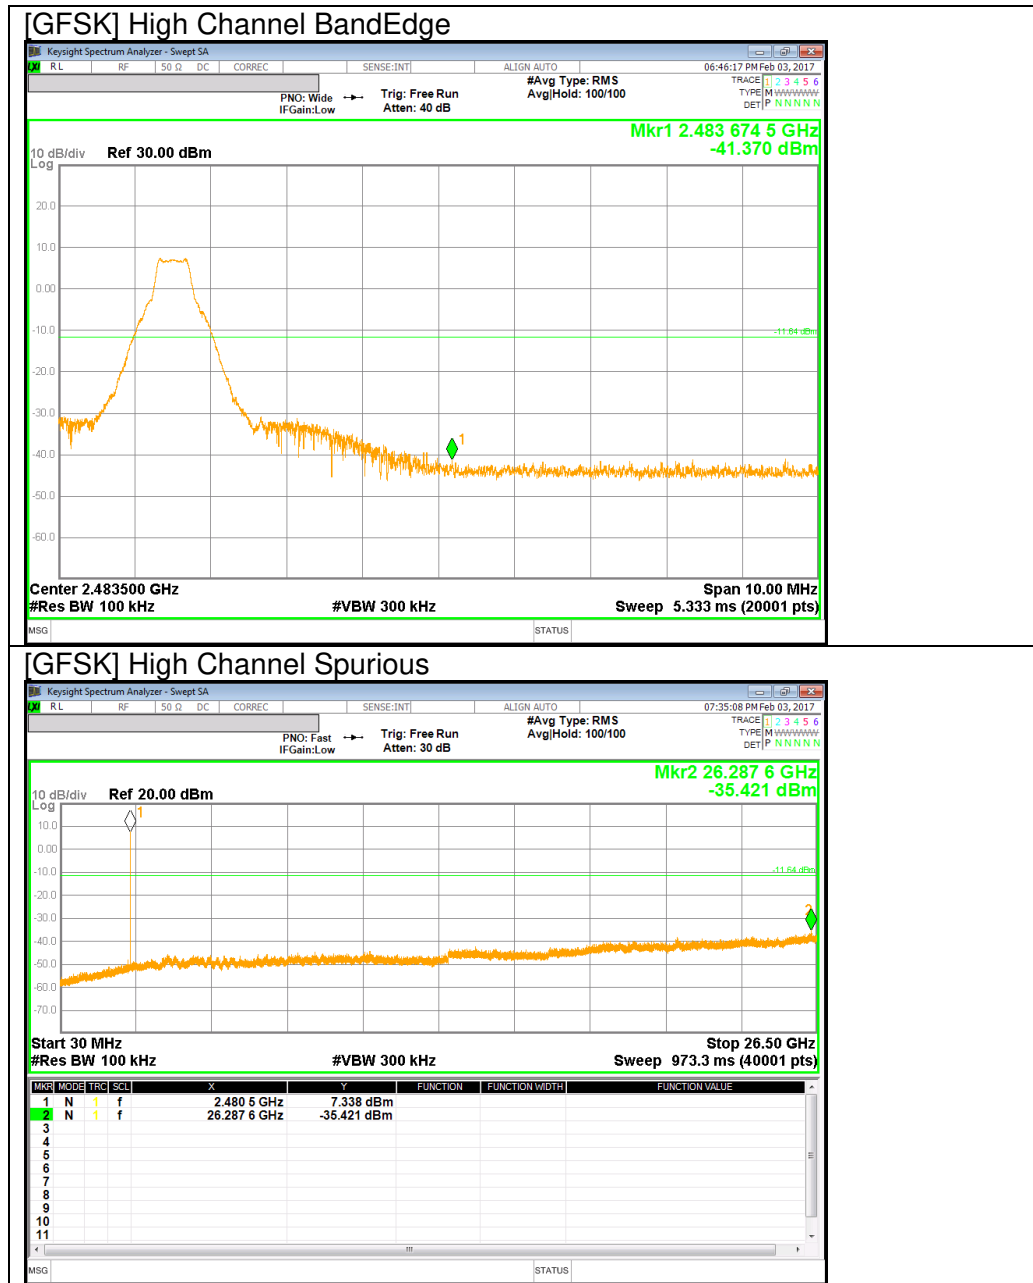


BandEdge Emission at GFSK Hopping Mode


[GFSK Hopping Mode] Low Channel BandEdge

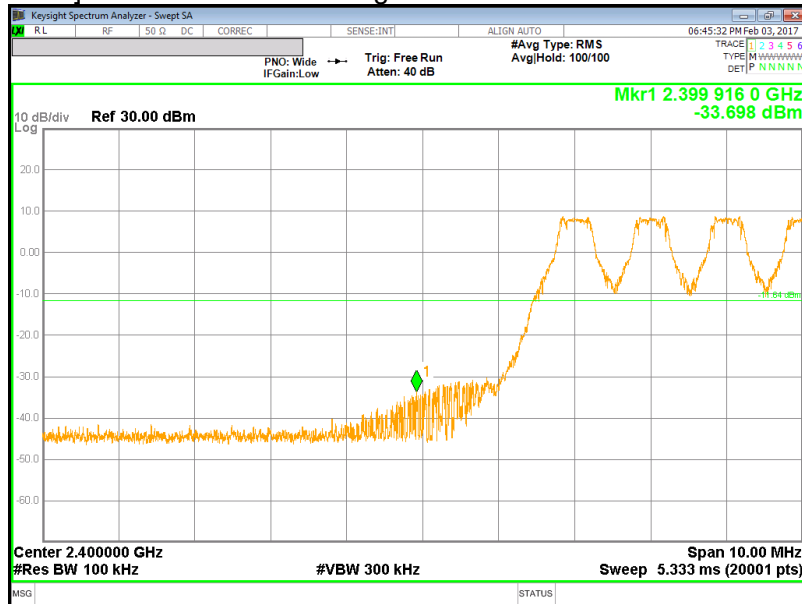



[GFSK Hopping Mode] High Channel BandEdge

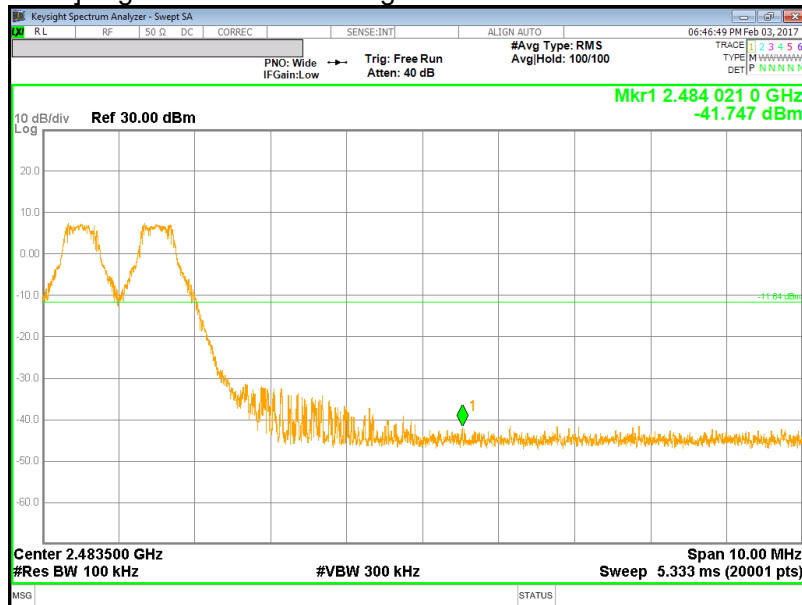

PI/4-DQPSK Mode

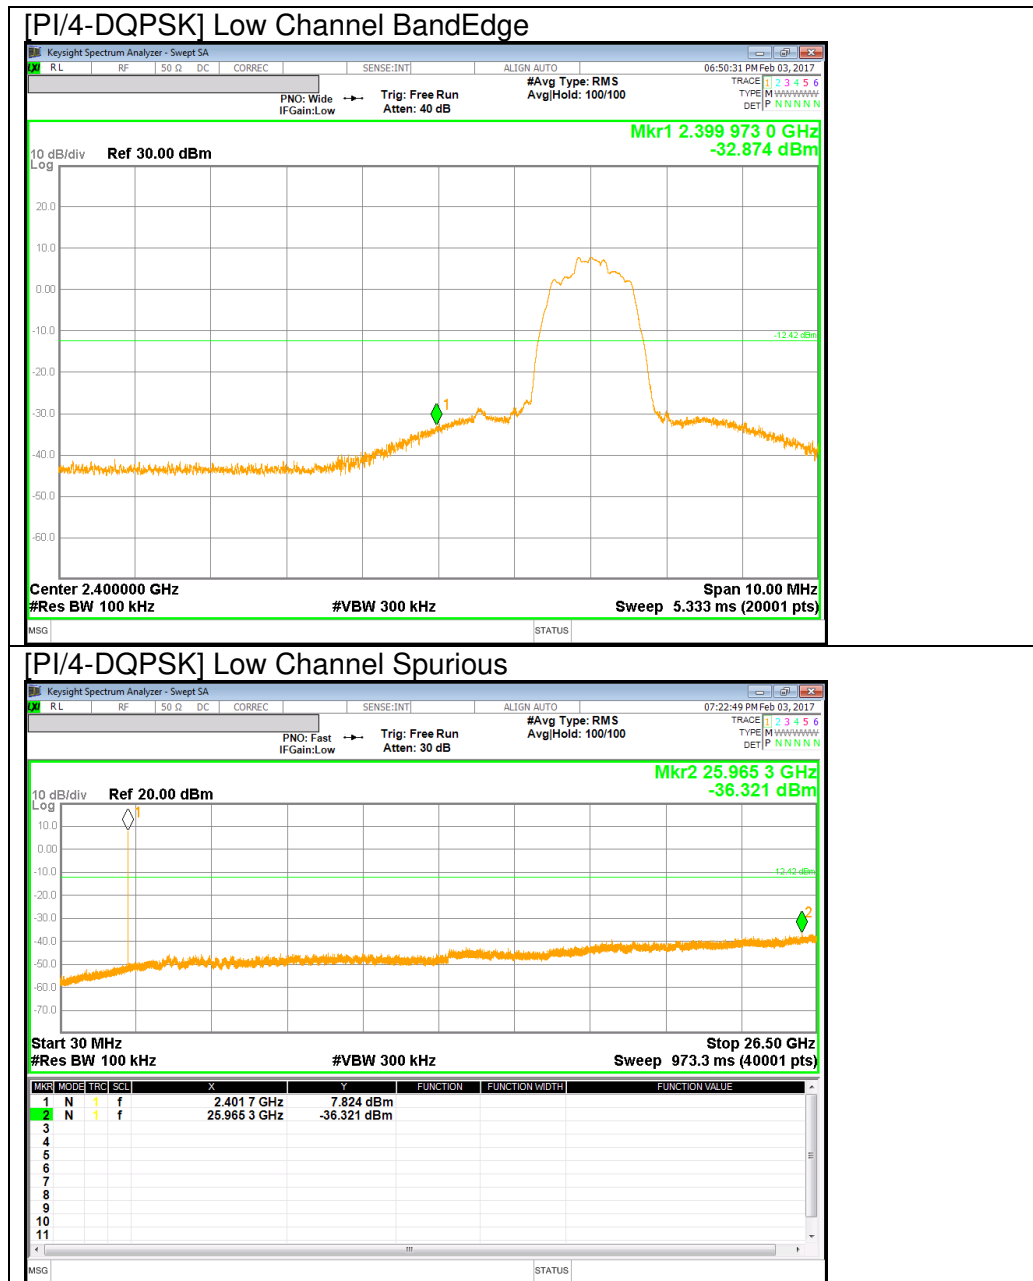


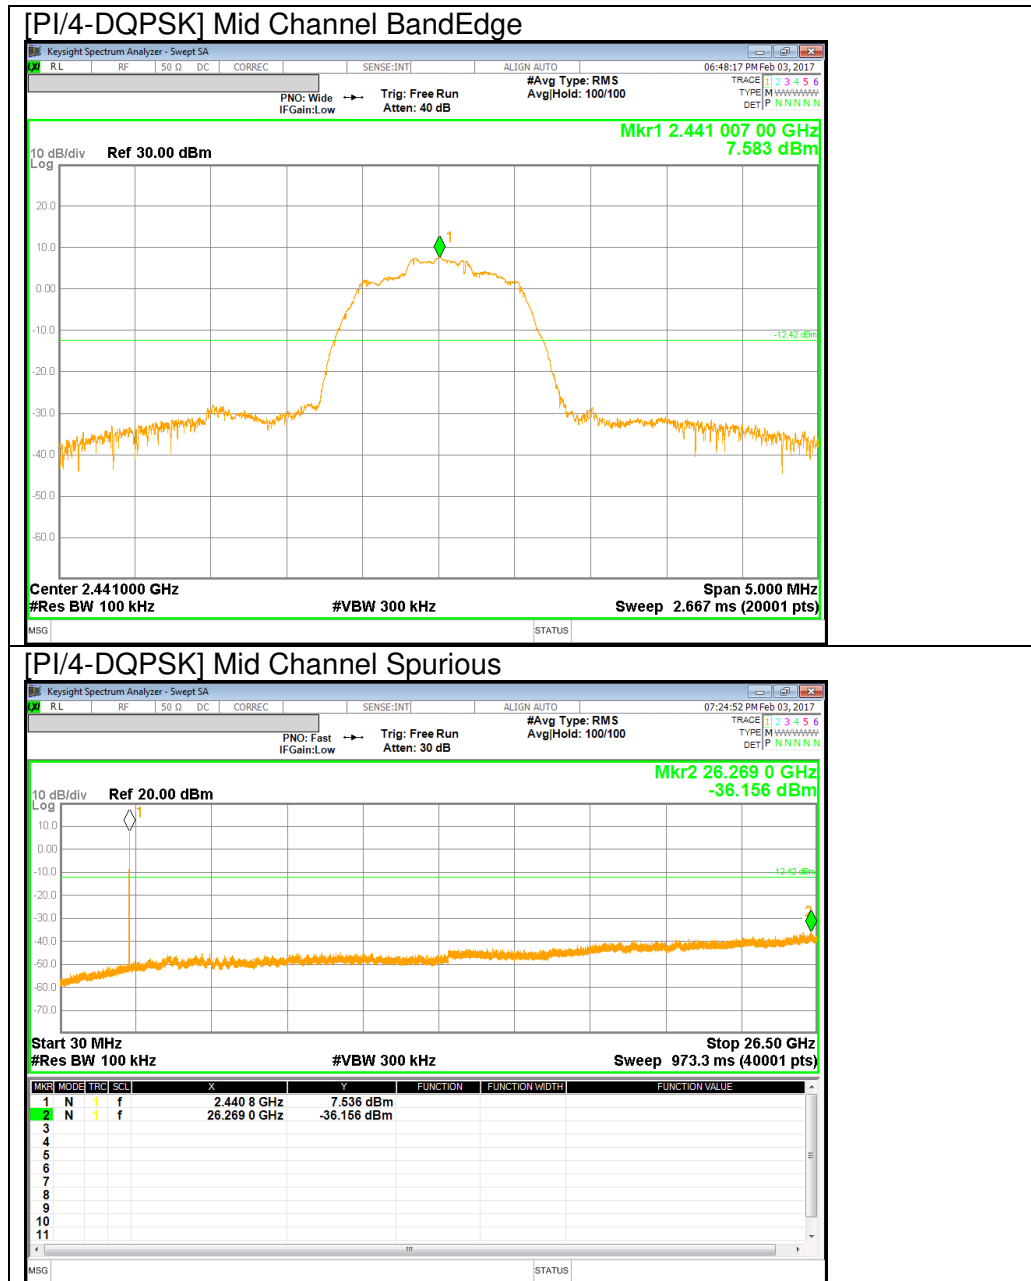

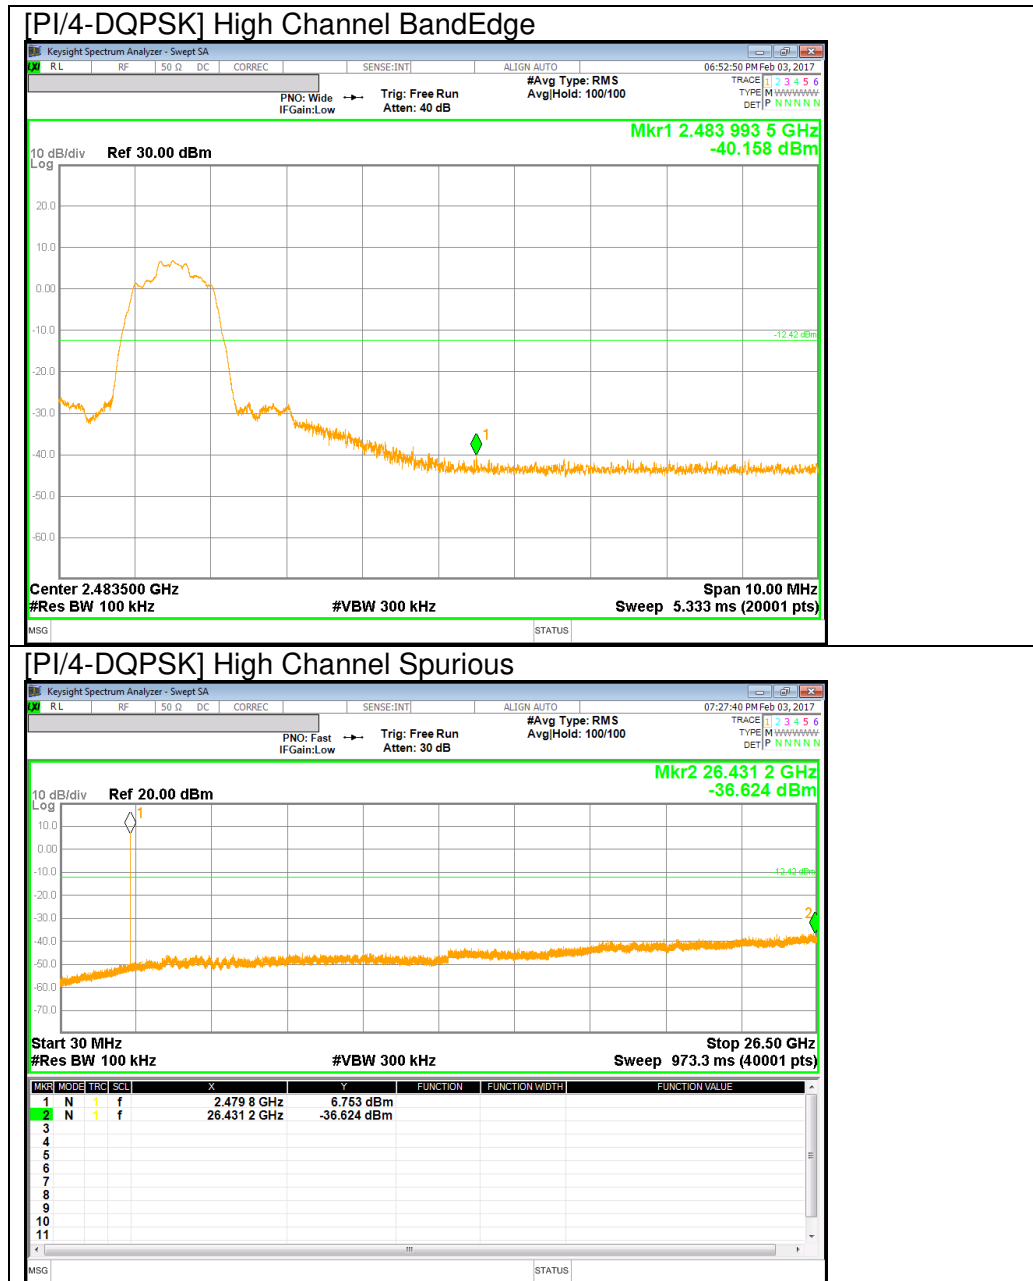


BandEdge Emission at PI/4-DQPSK Hopping Mode


[PI/4-DQPSK Hopping Mode] Low Channel BandEdge

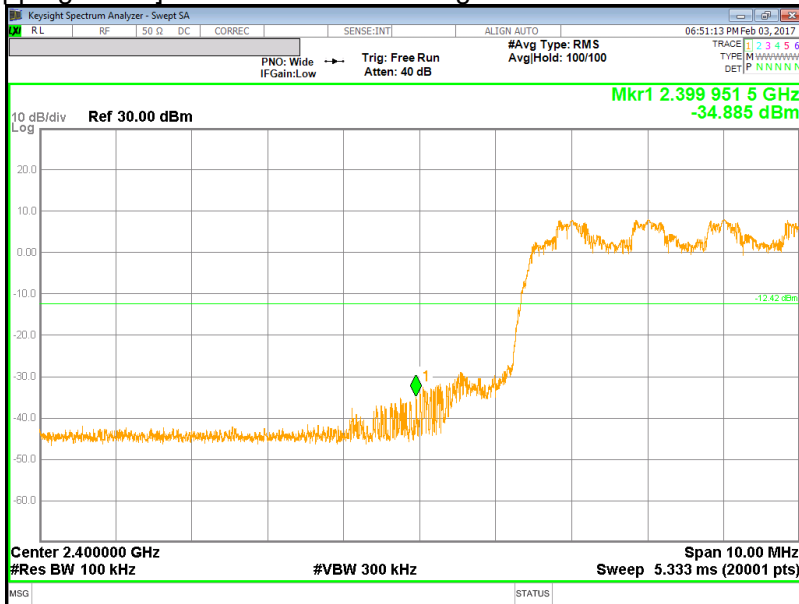



[PI/4-DQPSK Hopping Mode] High Channel BandEdge

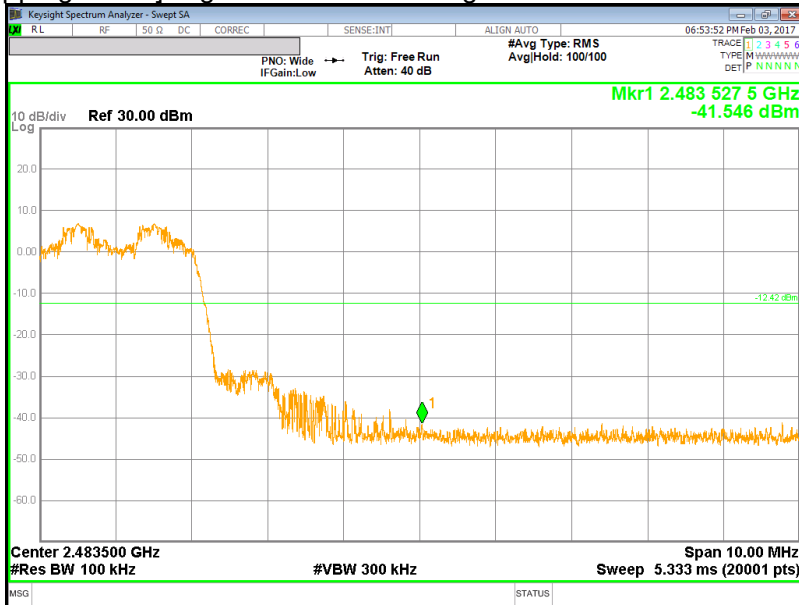

8PSK Mode

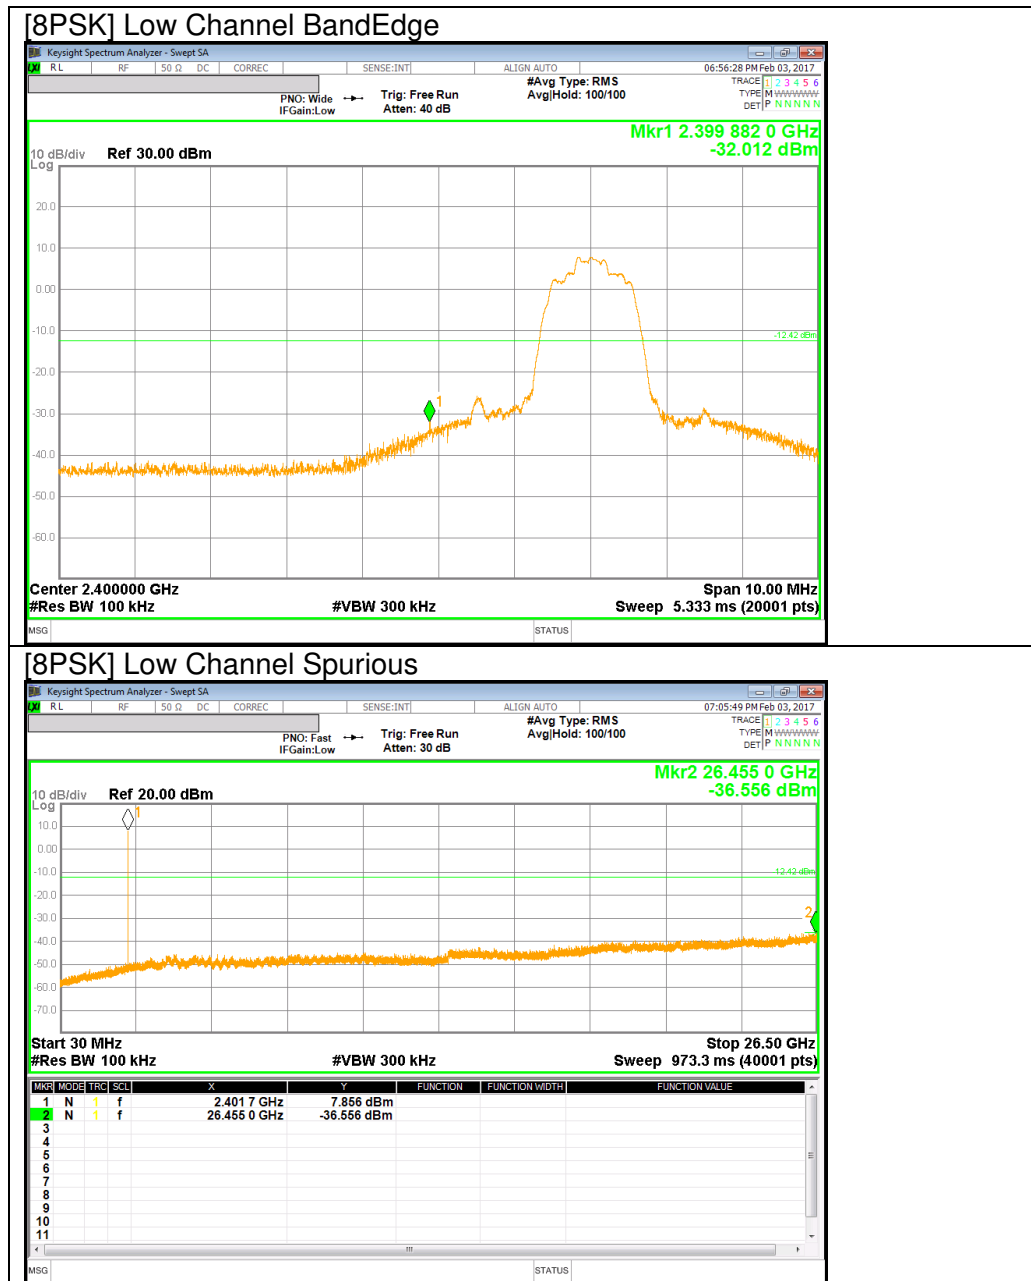


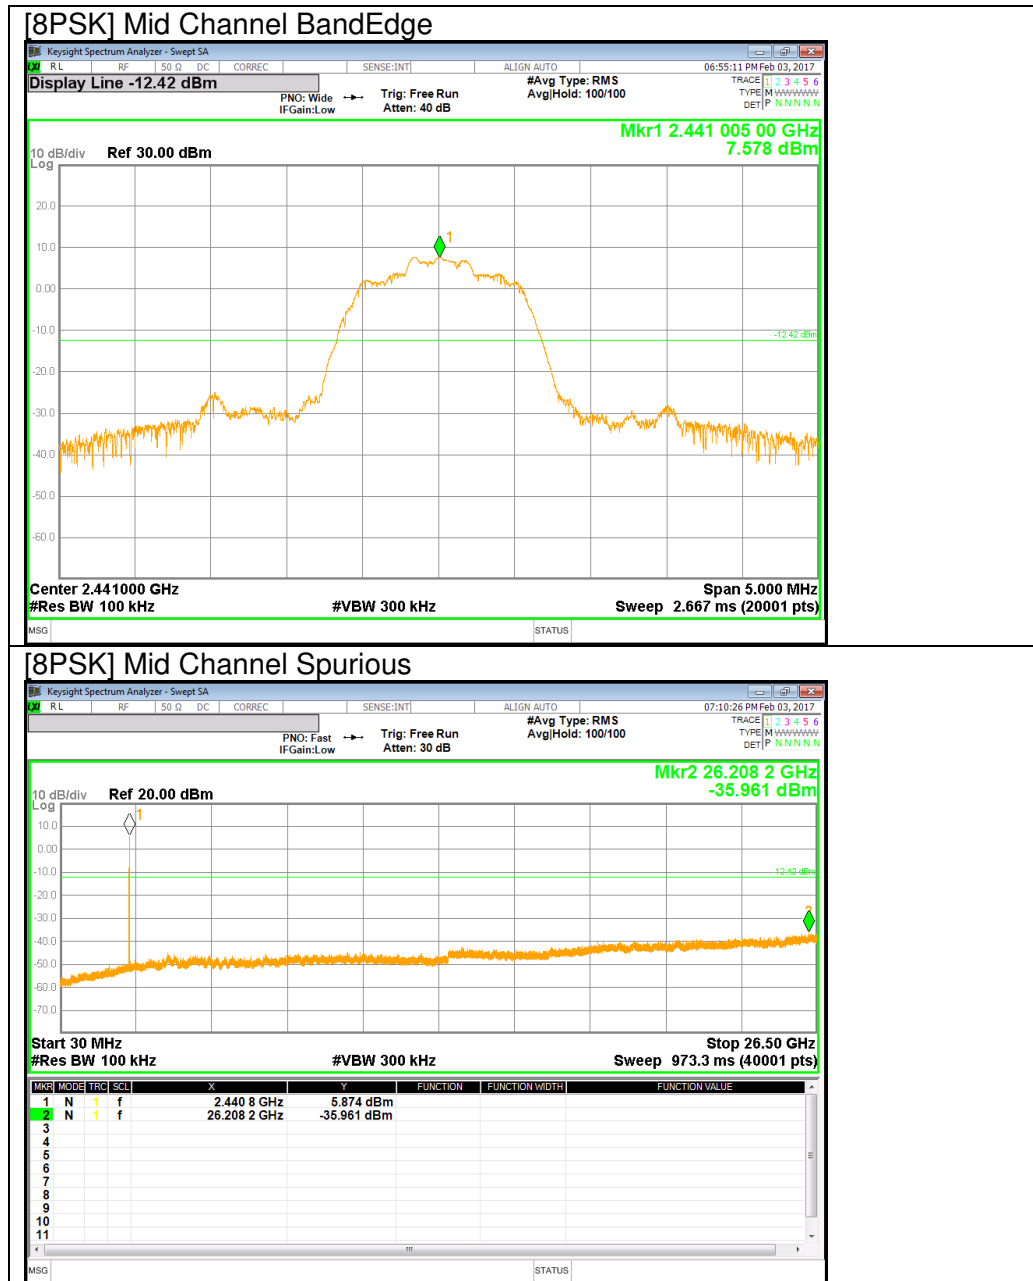

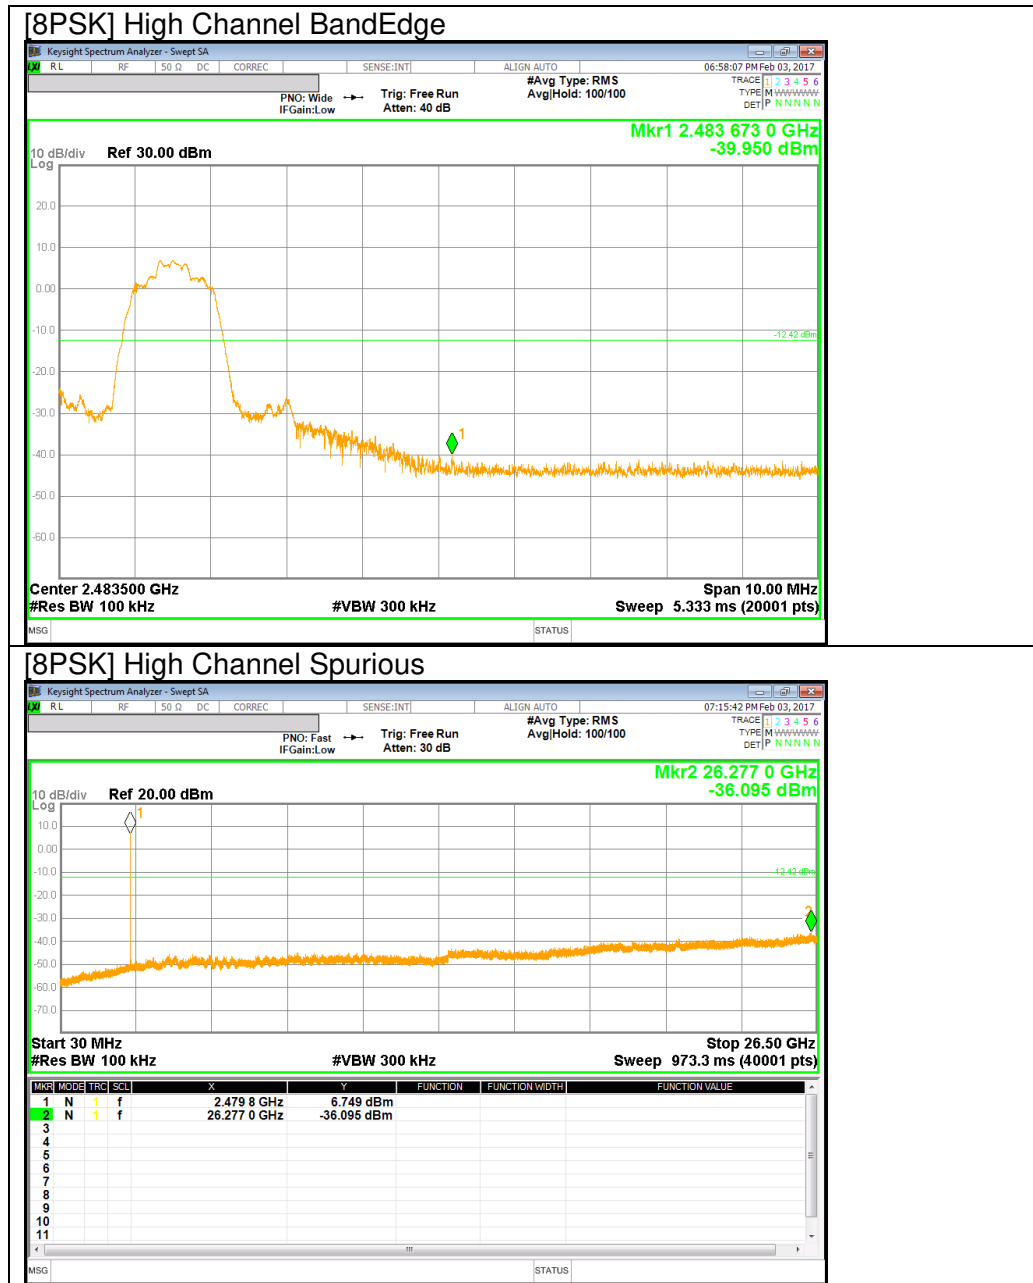


BandEdge Emission at 8PSK Hopping Mode

[8PSK Hopping Mode] Low Channel BandEdge

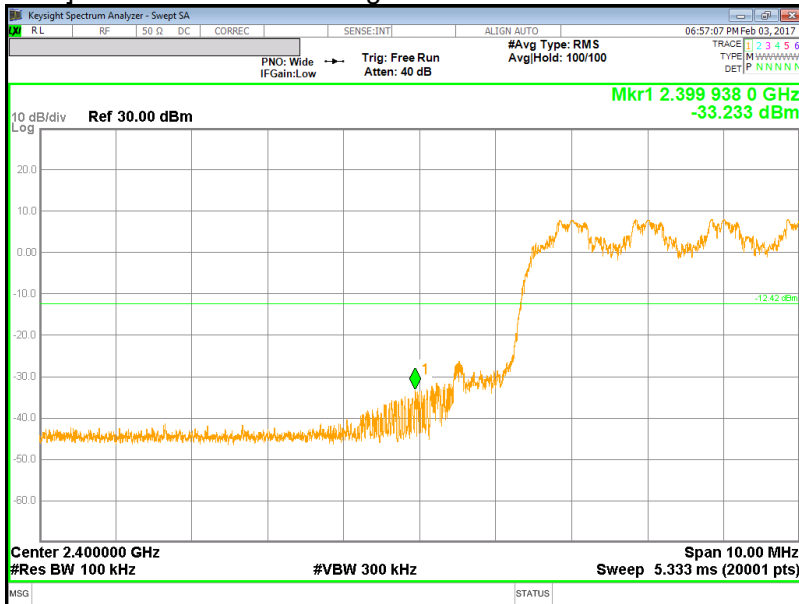

[8PSK Hopping Mode] High Channel BandEdge

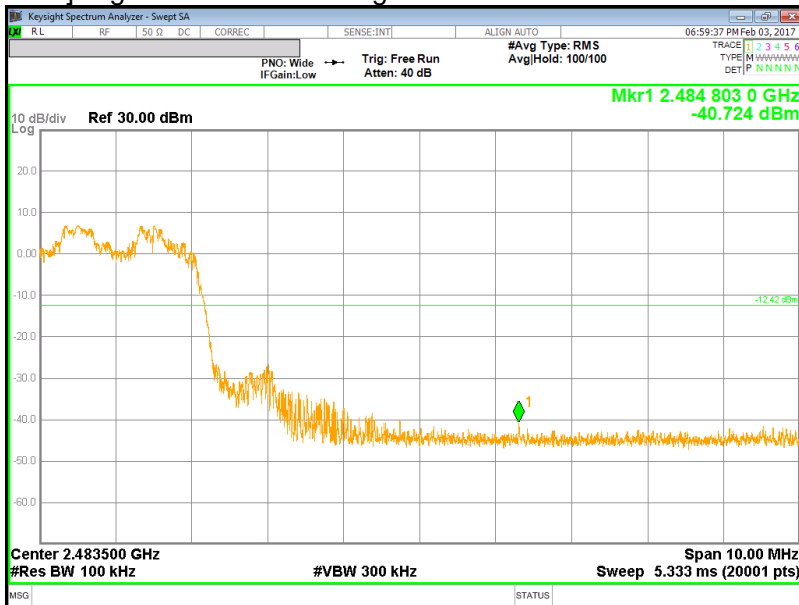

11. RADIATED TEST RESULTS

11.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0029\text{S} = 350\text{Hz}.$$

The minimum VBW was 350Hz, but test receiver(ESU40) couldn't set value 350Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Formula for converting the filed strength from uV/m to dBuV/m is:
Limit (dBuV/m) = 20 log limit (uV/m)


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 937606.

11.2. TRANSMITTER ABOVE 1 GHz

11.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

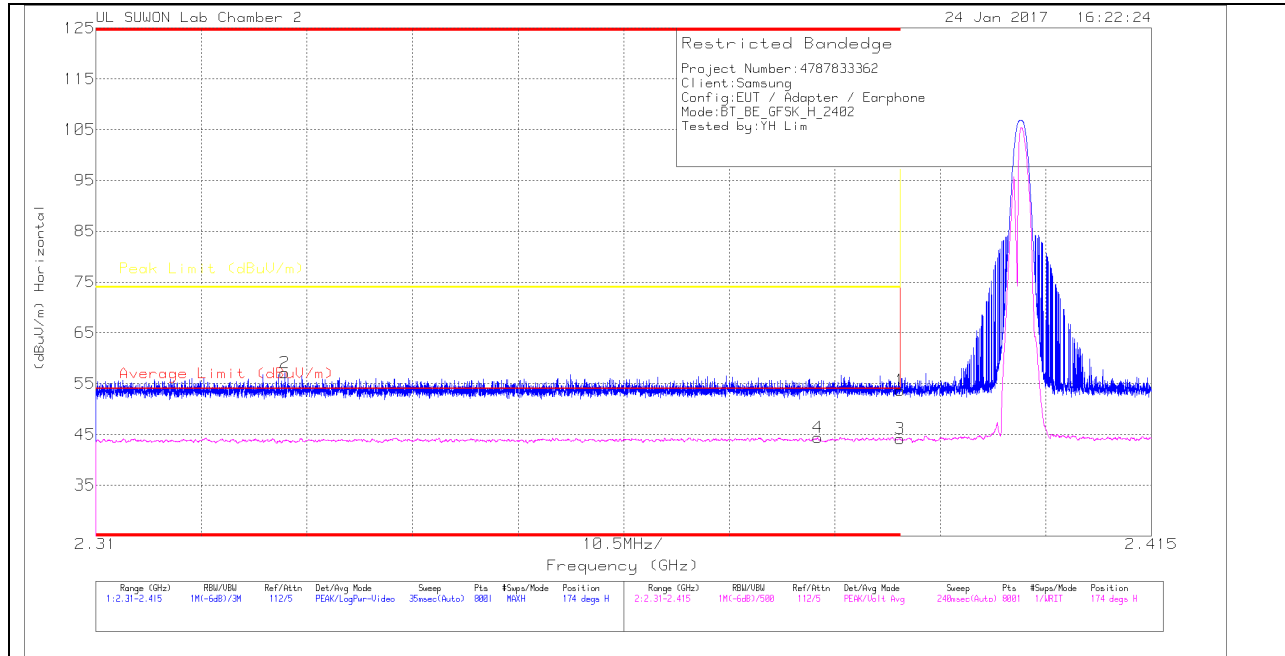

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.11	Pk	31.7	-18.2	53.61	-	-	74	-20.39	174	265	H
2	* 2.329	43.95	Pk	31.6	-18.4	57.15	-	-	74	-16.85	174	265	H
3	* 2.39	30.59	VA1T	31.7	-18.2	44.09	54	-9.91	-	-	174	265	H
4	* 2.382	30.9	VA1T	31.7	-18.2	44.4	54	-9.6	-	-	174	265	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

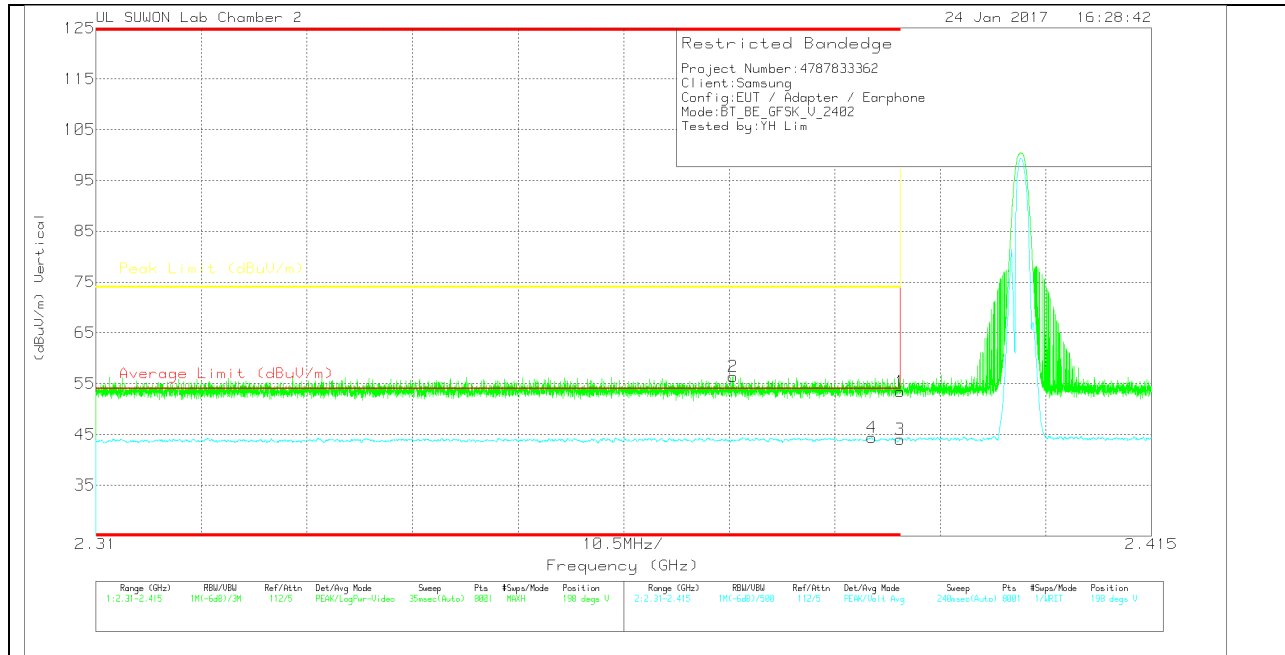

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.95	Pk	31.7	-18.2	53.45	-	-	74	-20.55	198	365	V
2	* 2.373	42.96	Pk	31.7	-18.3	56.36	-	-	74	-17.64	198	365	V
3	* 2.39	30.55	VA1T	31.7	-18.2	44.05	54	-9.95	-	-	198	365	V
4	* 2.387	30.93	VA1T	31.7	-18.2	44.43	54	-9.57	-	-	198	365	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

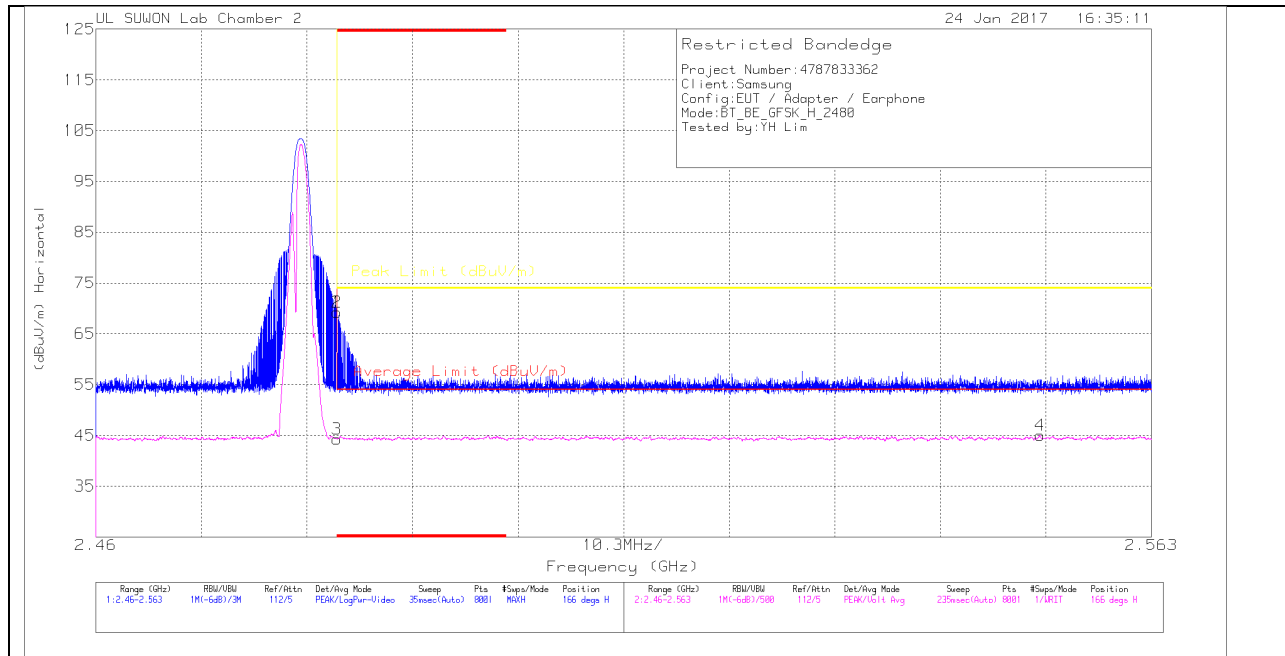

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.44	Pk	31.8	-18	69.24	-	-	74	-4.76	166	154	H
2	* 2.484	55.46	Pk	31.8	-18	69.26	-	-	74	-4.74	166	154	H
3	* 2.484	30.5	VA1T	31.8	-18	44.3	54	-9.7	-	-	166	154	H
4	2.552	31.15	VA1T	31.9	-18	45.05	54	-8.95	-	-	166	154	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

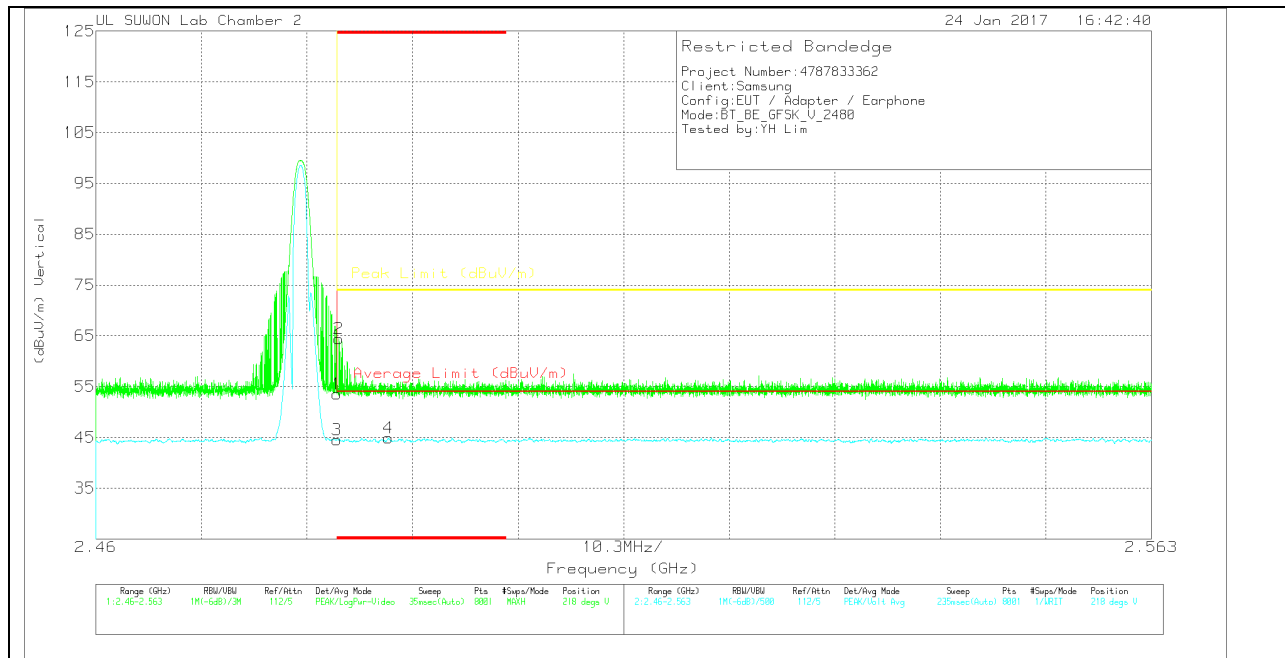

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.79	Pk		-18	53.59	-	-	74	-20.41	218	400	V
2	* 2.484	50.6	Pk		-18	64.4	-	-	74	-9.6	218	400	V
3	* 2.484	30.71	VA1T		-18	44.51	54	-9.49	-	-	218	400	V
4	* 2.489	31.07	VA1T		-18	44.87	54	-9.13	-	-	218	400	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average $VB=1/T_{on}$ where: T_{on} is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

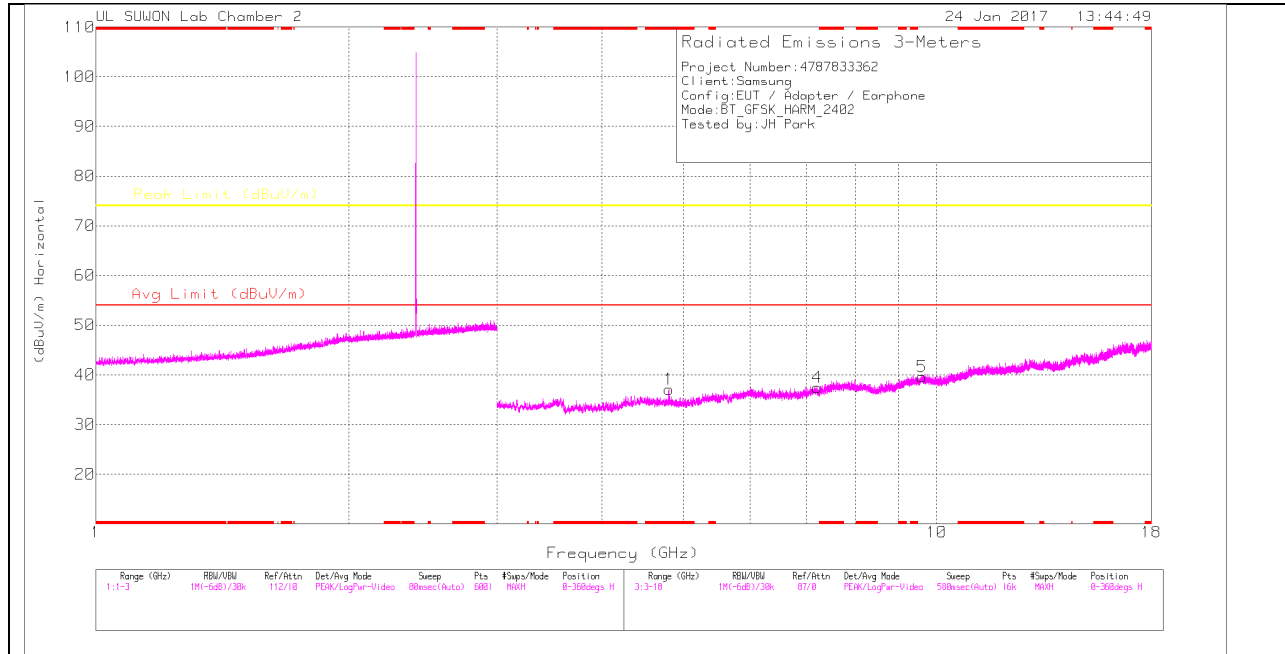

LOW CHANNEL VERTICAL

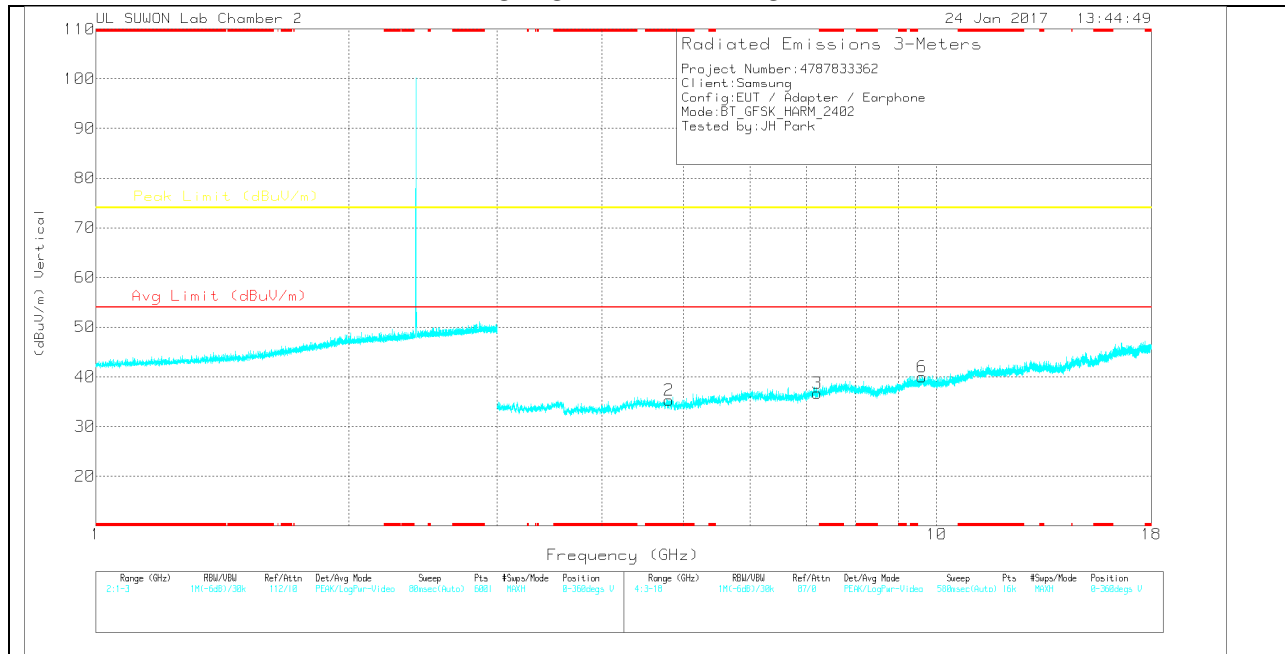

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	27.5	PK	33.9	-24.3	37.1	-	-	74	-36.9	0-360	250	H
4	7.205	23.36	PK	35.8	-21.7	37.46	-	-	74	-36.54	0-360	150	H
5	9.608	21.09	PK	36.9	-18.4	39.59	-	-	74	-34.41	0-360	250	H
2	* 4.804	25.73	PK	33.9	-24.3	35.33	-	-	74	-38.67	0-360	150	V
3	7.206	22.63	PK	35.8	-21.7	36.73	-	-	74	-37.27	0-360	250	V
6	9.605	21.48	PK	36.9	-18.4	39.98	-	-	74	-34.02	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

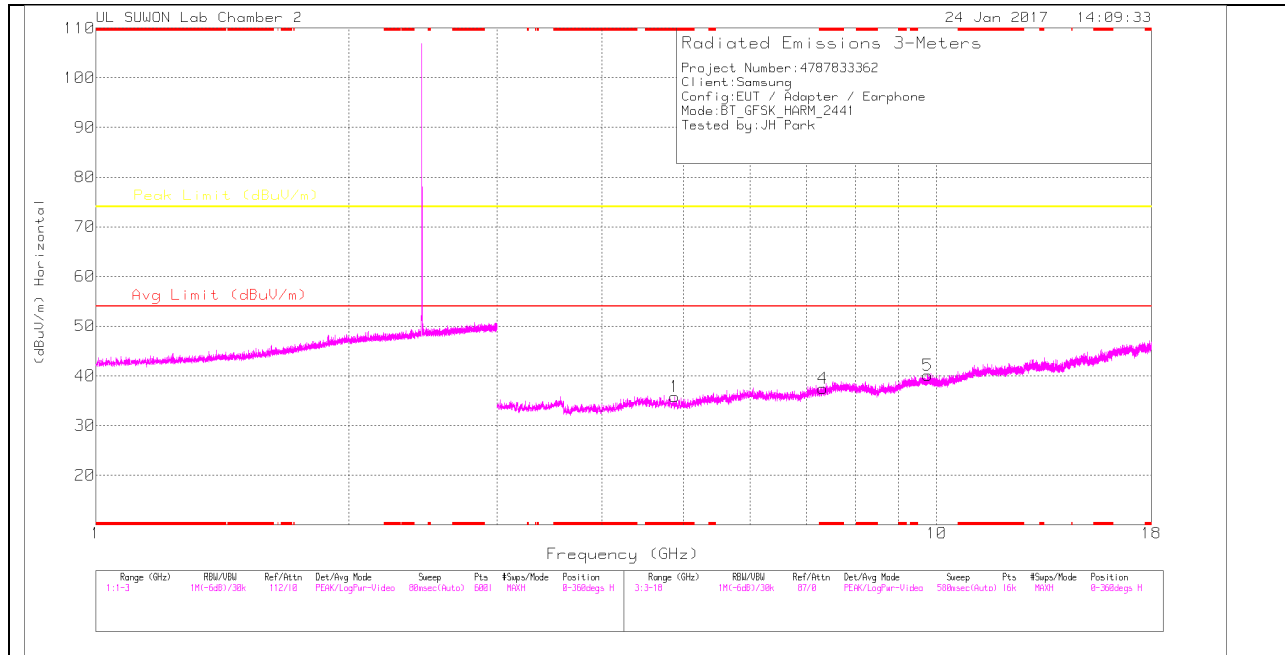

MID CHANNEL VERTICAL

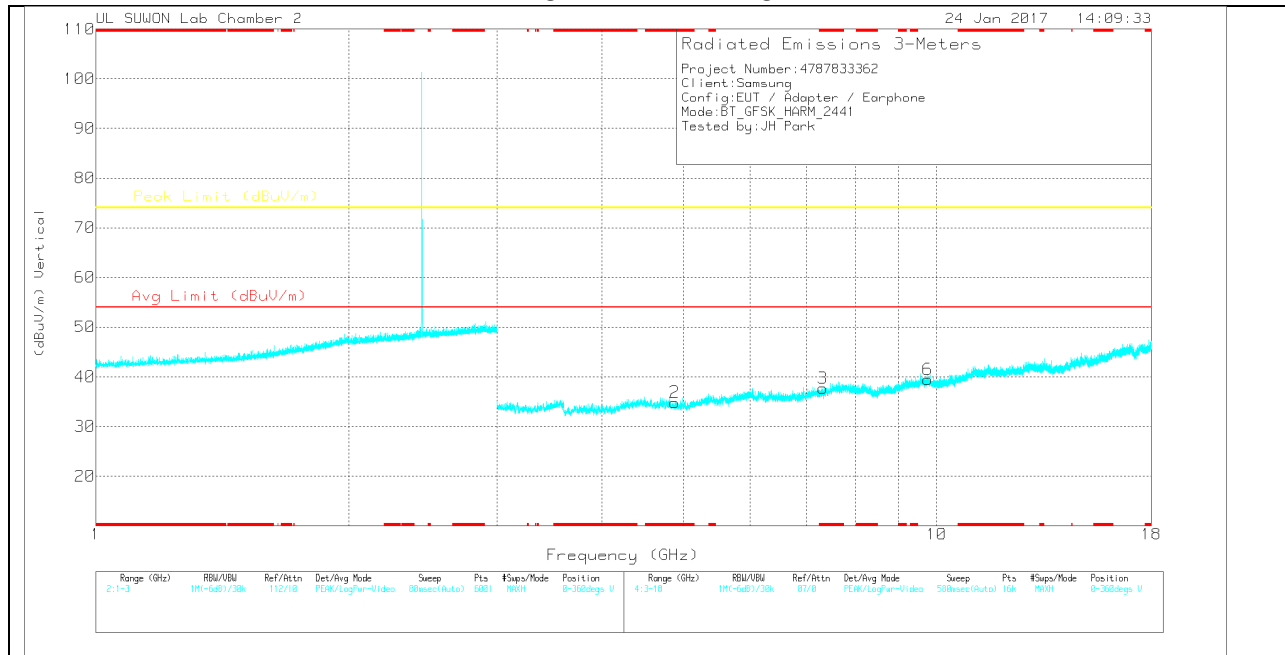

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	26.56	PK	33.9	-24.6	35.86	-	-	74	-38.14	0-360	150	H
4	* 7.323	23.47	PK	35.9	-21.9	37.47	-	-	74	-36.53	0-360	250	H
5	9.764	21.07	PK	37	-18	40.07	-	-	74	-33.93	0-360	250	H
2	* 4.882	25.56	PK	33.9	-24.6	34.86	-	-	74	-39.14	0-360	150	V
3	* 7.323	23.76	PK	35.9	-21.9	37.76	-	-	74	-36.24	0-360	250	V
6	9.76	20.53	PK	37	-18	39.53	-	-	74	-34.47	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

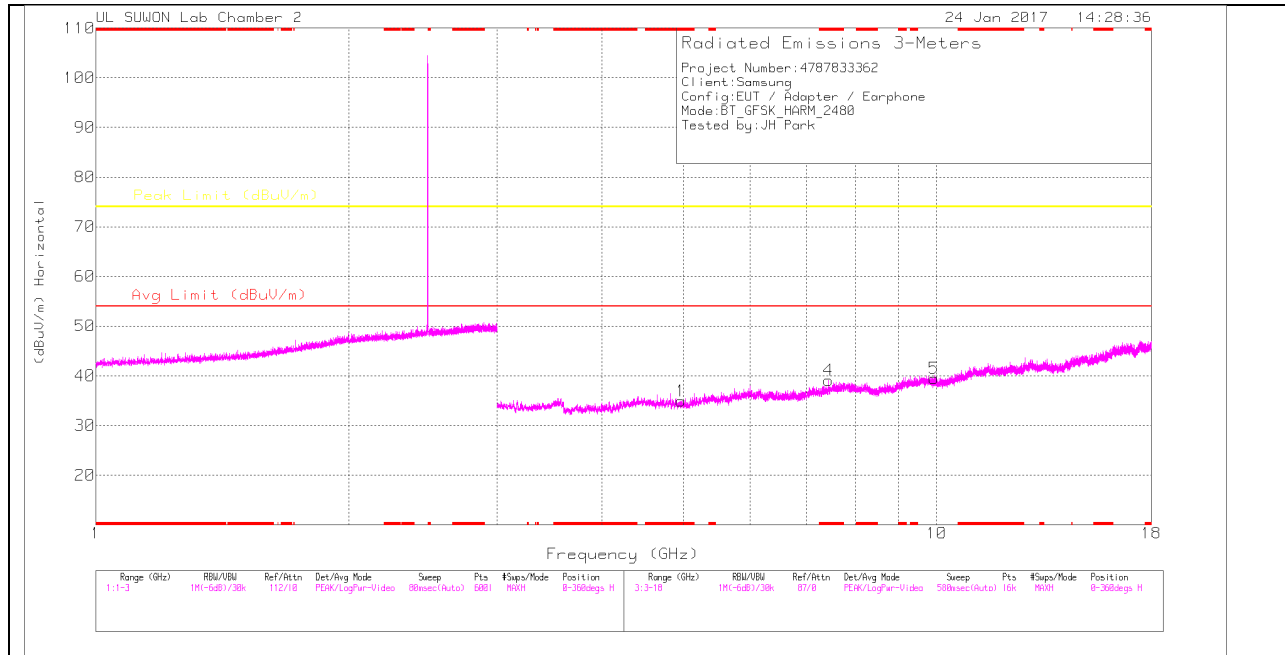

HIGH CHANNEL VERTICAL

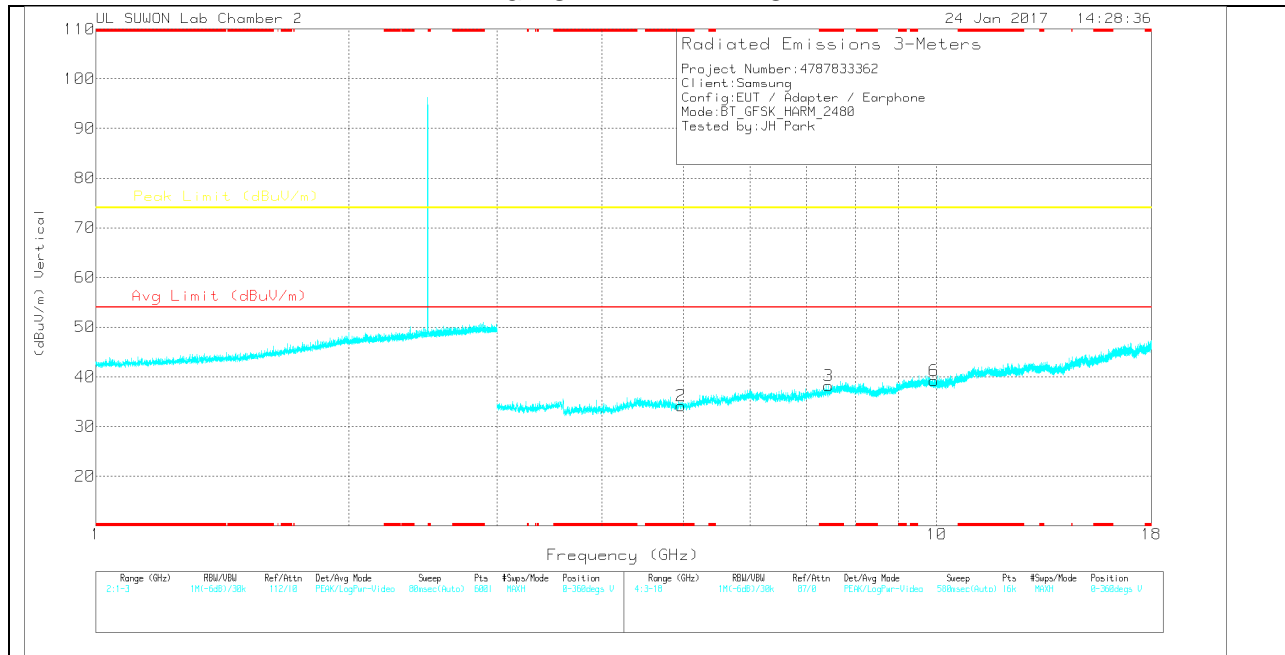

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	25.74	PK	33.9	-24.7	34.94	-	-	74	-39.06	0-360	150	H
4	* 7.44	24.06	PK	36	-21	39.06	-	-	74	-34.94	0-360	250	H
5	9.919	20.33	PK	37.1	-18	39.43	-	-	74	-34.57	0-360	150	H
2	* 4.964	25.01	PK	33.9	-24.7	34.21	-	-	74	-39.79	0-360	150	V
3	* 7.435	23.17	PK	36	-21	38.17	-	-	74	-35.83	0-360	250	V
6	9.92	20.07	PK	37.1	-18	39.17	-	-	74	-34.83	0-360	250	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

11.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

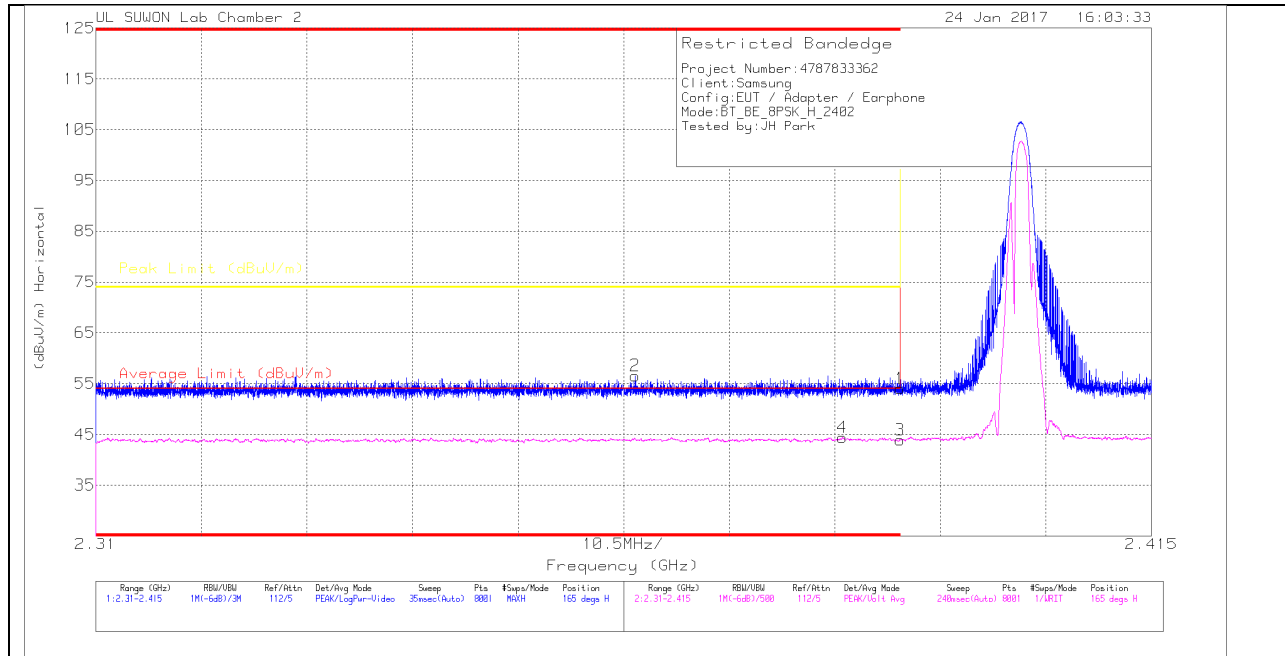

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.53	Pk		-18.2	54.03	-	-	74	-19.97	165	262	H
2	* 2.364	43.17	Pk		-18.3	56.57	-	-	74	-17.43	165	262	H
3	* 2.39	30.4	VA1T		-18.2	43.9	54	-10.1	-	-	165	262	H
4	* 2.384	30.87	VA1T		-18.2	44.37	54	-9.63	-	-	165	262	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

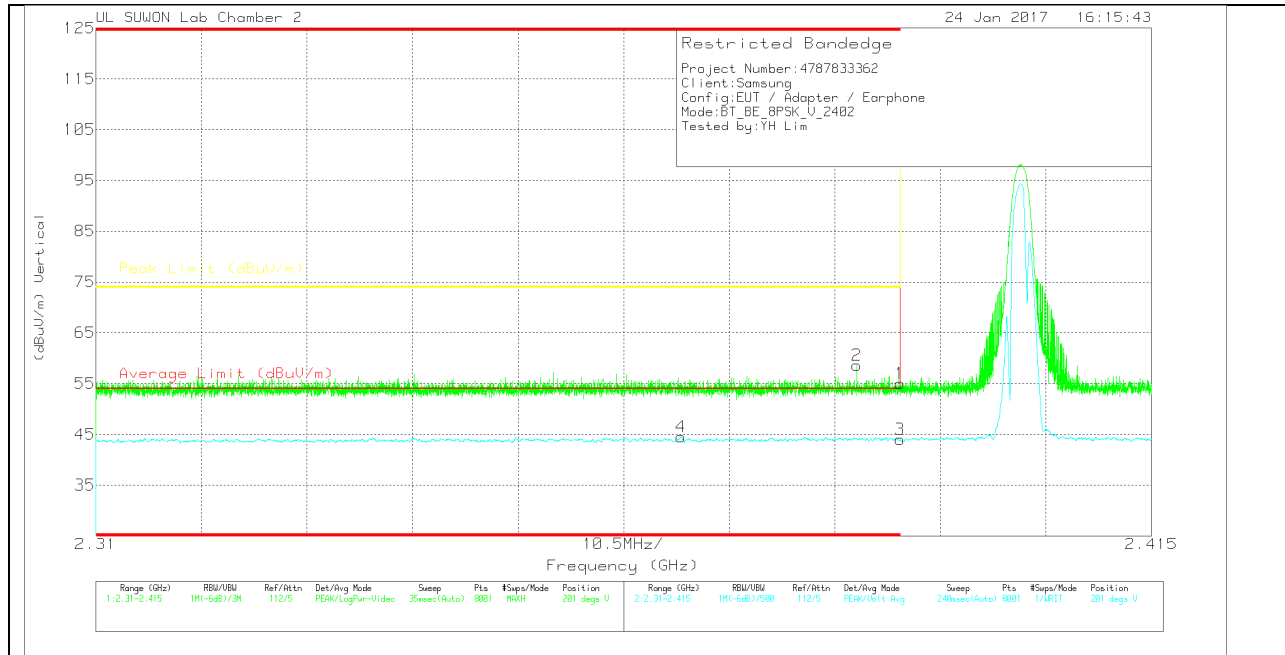

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.54	Pk		-18.2	55.04	-	-	74	-18.96	201	259	V
2	* 2.386	45.13	Pk		-18.2	58.63	-	-	74	-15.37	201	259	V
3	* 2.39	30.48	VA1T		-18.2	43.98	54	-10.02	-	-	201	259	V
4	* 2.368	31.11	VA1T		-18.3	44.51	54	-9.49	-	-	201	259	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/T_{on}$ where: T_{on} is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

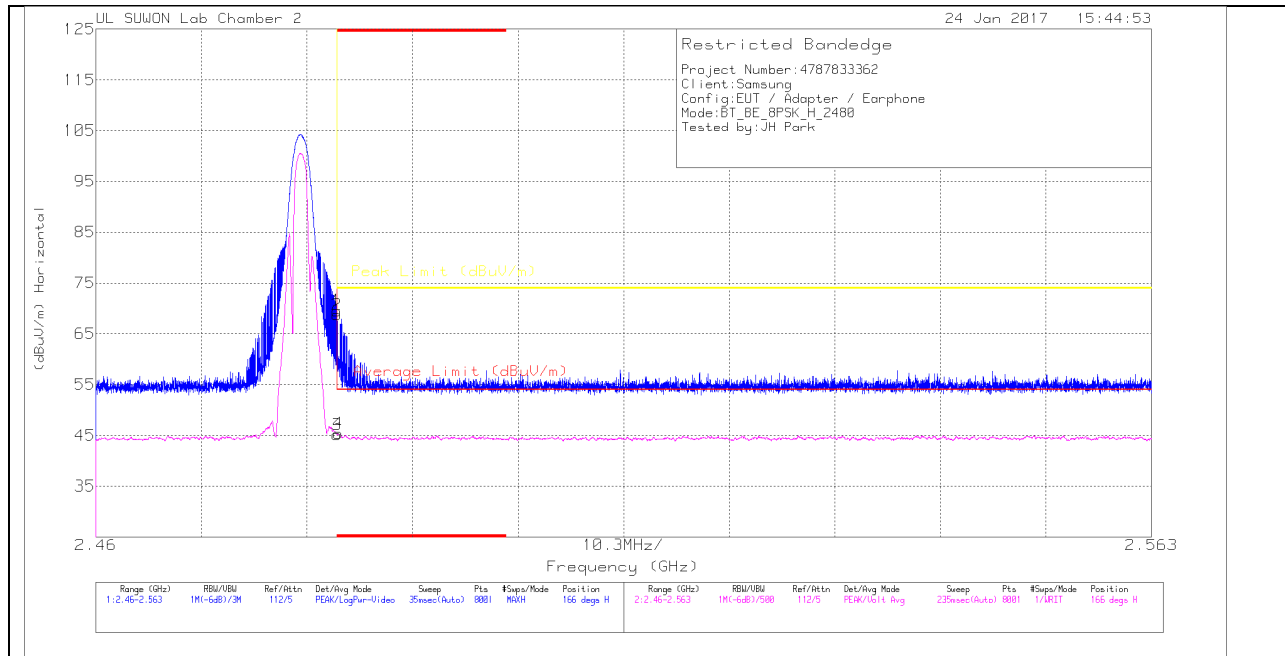

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	55.76	Pk	31.8	-18	69.56	-	-	74	-4.44	166	246	H
2	* 2.484	54.97	Pk	31.8	-18	68.77	-	-	74	-5.23	166	246	H
3	* 2.484	31.31	VA1T	31.8	-18	45.11	54	-8.89	-	-	166	246	H
4	* 2.484	31.57	VA1T	31.8	-18	45.37	54	-8.63	-	-	166	246	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

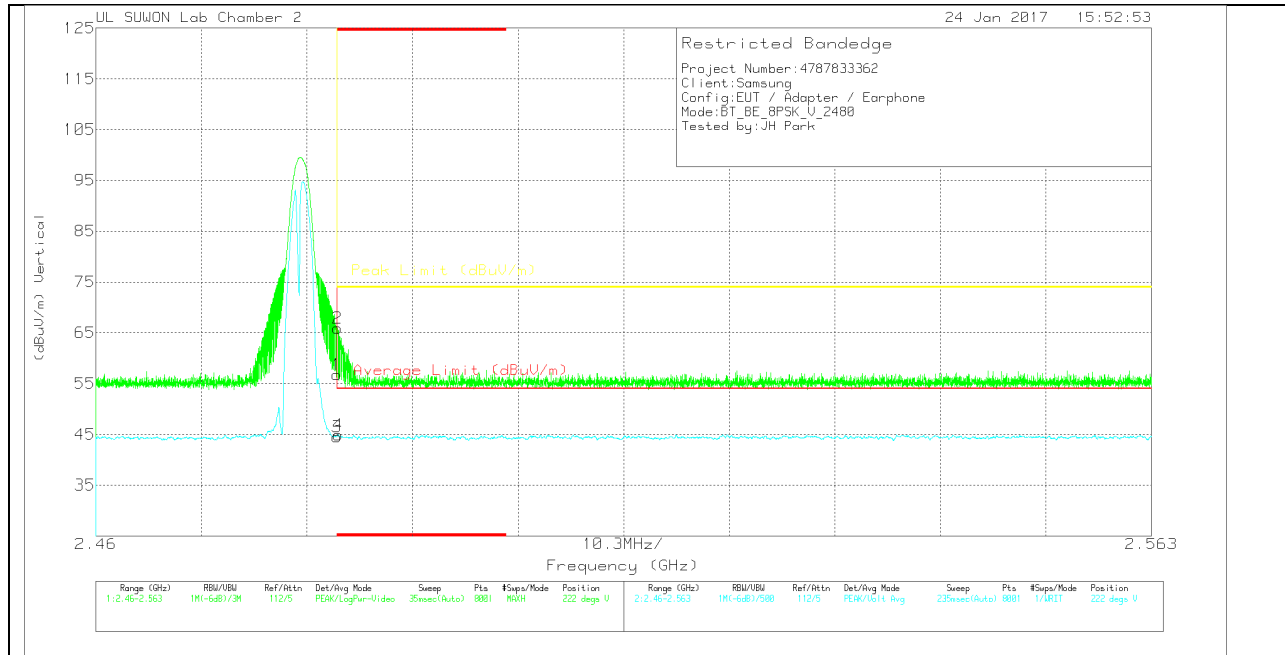

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.95	Pk		-18	56.75	-	-	74	-17.25	222	393	V
2	* 2.484	52.08	Pk		-18	65.88	-	-	74	-8.12	222	393	V
3	* 2.484	30.71	VA1T		-18	44.51	54	-9.49	-	-	222	393	V
4	* 2.484	31.1	VA1T		-18	44.9	54	-9.1	-	-	222	393	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

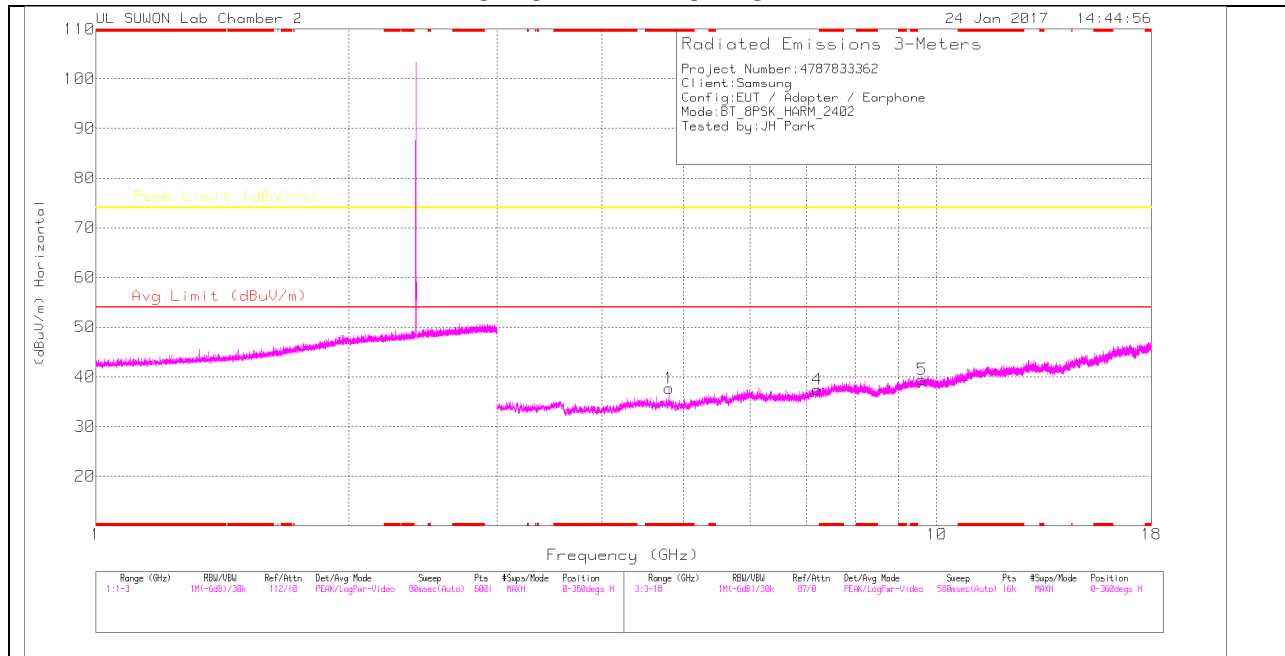

LOW CHANNEL VERTICAL

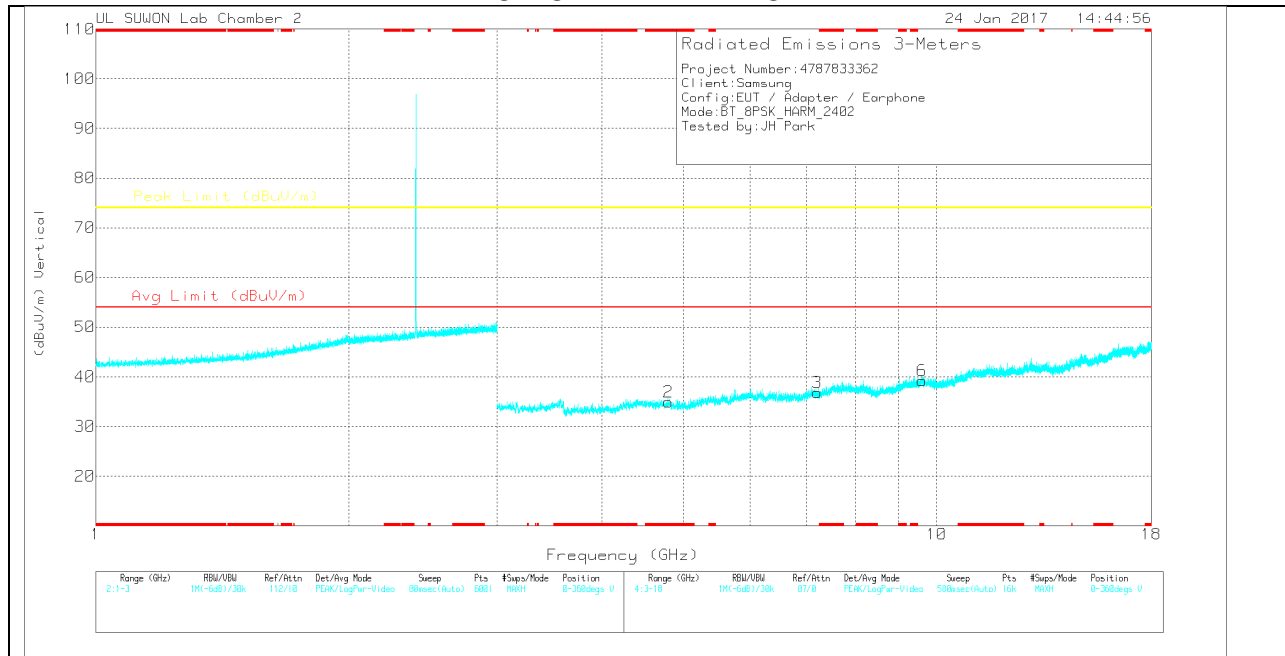

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	28.08	PK	33.9	-24.3	37.68	-	-	74	-36.32	0-360	250	H
4	7.204	23.34	PK	35.8	-21.7	37.44	-	-	74	-36.56	0-360	150	H
5	9.61	20.96	PK	36.9	-18.4	39.46	-	-	74	-34.54	0-360	250	H
2	* 4.8	25.31	PK	33.9	-24.3	34.91	-	-	74	-39.09	0-360	250	V
3	7.206	22.71	PK	35.8	-21.7	36.81	-	-	74	-37.19	0-360	150	V
6	9.611	20.71	PK	36.9	-18.4	39.21	-	-	74	-34.79	0-360	250	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

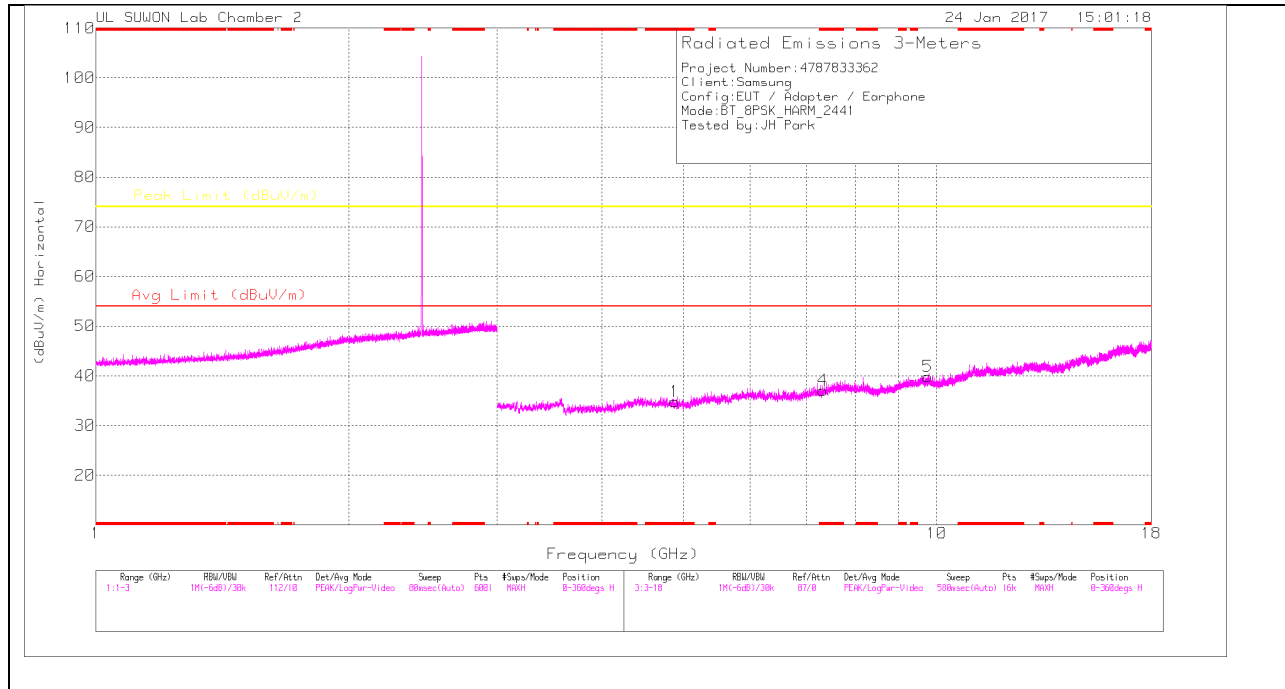

MID CHANNEL VERTICAL

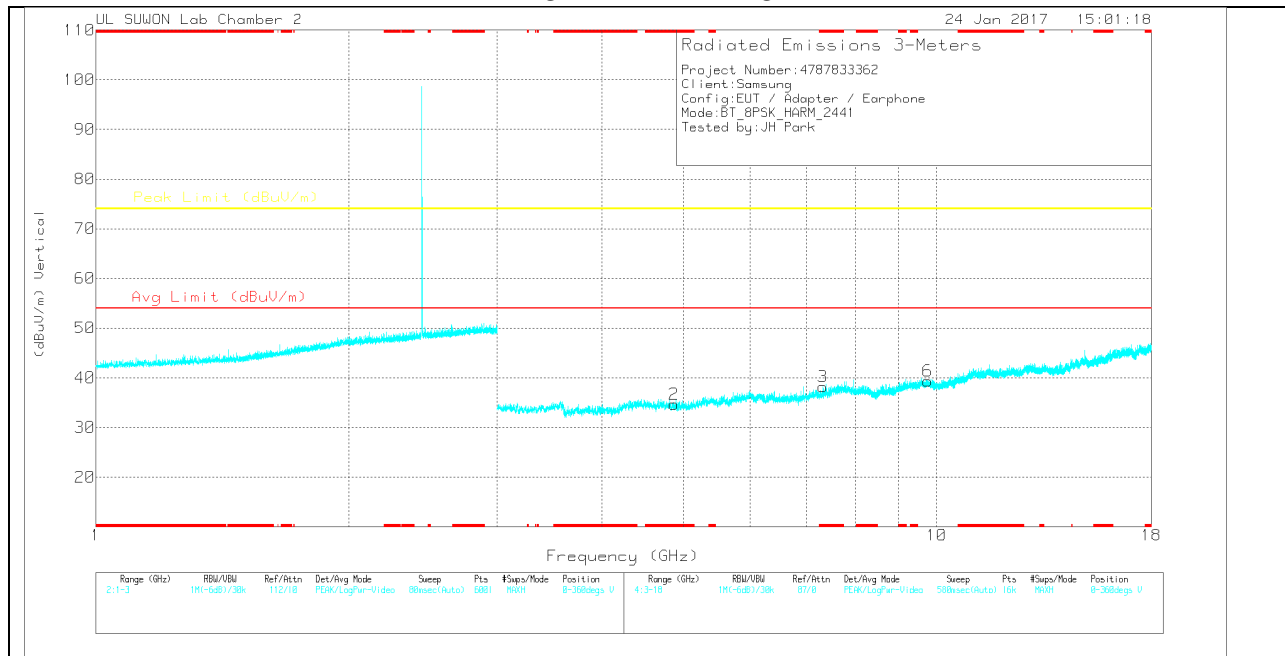

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	25.49	PK	33.9	-24.6	34.79	-	-	74	-39.21	0-360	150	H
4	* 7.323	23.12	PK	35.9	-21.9	37.12	-	-	74	-36.88	0-360	250	H
5	9.76	20.86	PK	37	-18	39.86	-	-	74	-34.14	0-360	150	H
2	* 4.874	25.32	PK	33.9	-24.5	34.72	-	-	74	-39.28	0-360	150	V
3	* 7.321	24.28	PK	35.9	-22	38.18	-	-	74	-35.82	0-360	250	V
6	9.764	20.4	PK	37	-18	39.4	-	-	74	-34.6	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

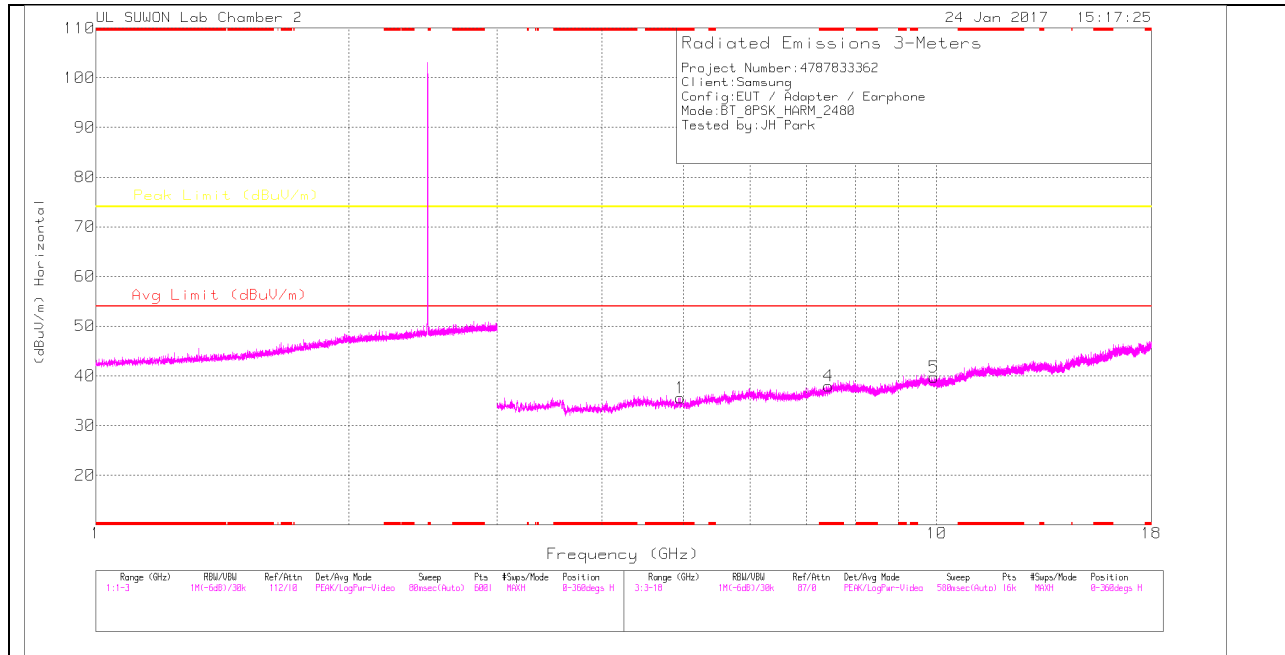

HIGH CHANNEL VERTICAL

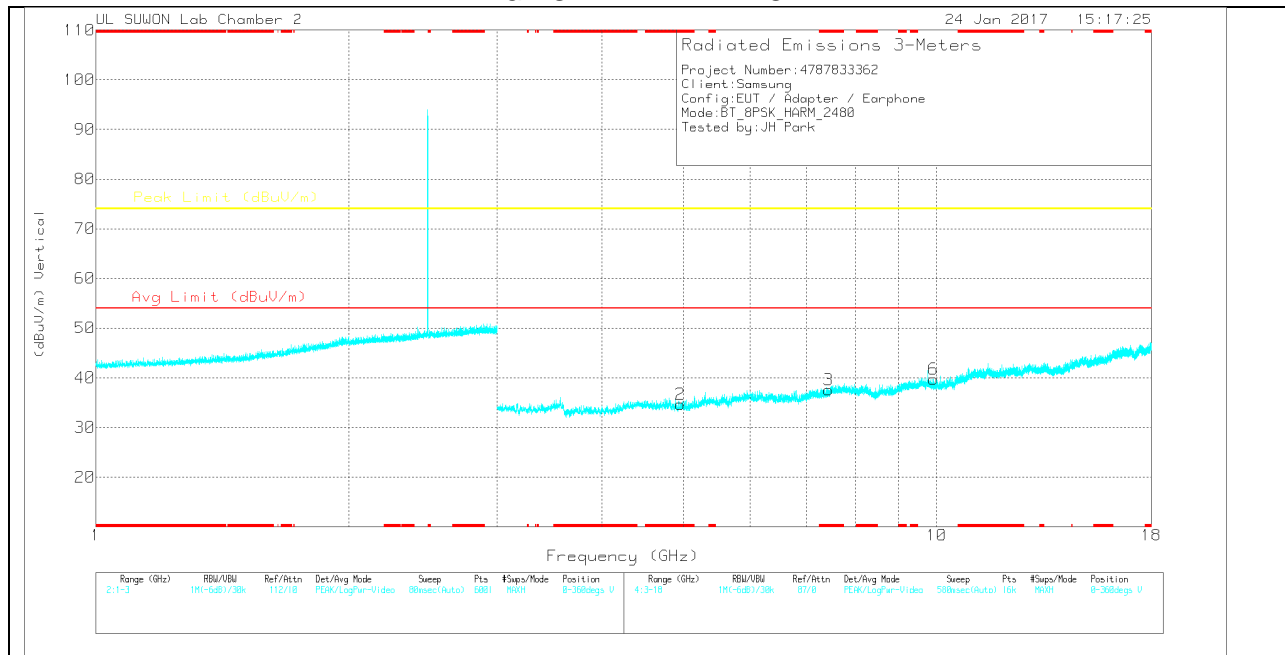

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117(0016 8724)_150 619	3GHz_HP[d B]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.956	26.32	PK	33.9	-24.7	35.52	-	-	74	-38.48	0-360	150	H
4	* 7.43	23.02	PK	36	-21.1	37.92	-	-	74	-36.08	0-360	150	H
5	9.92	20.68	PK	37.1	-18	39.78	-	-	74	-34.22	0-360	150	H
2	* 4.958	25.53	PK	33.9	-24.7	34.73	-	-	74	-39.27	0-360	150	V
3	* 7.439	22.6	PK	36	-21	37.6	-	-	74	-36.4	0-360	250	V
6	9.917	20.58	PK	37.1	-18	39.68	-	-	74	-34.32	0-360	150	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).


11.3. WORST-CASE BELOW 1 GHz

GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT

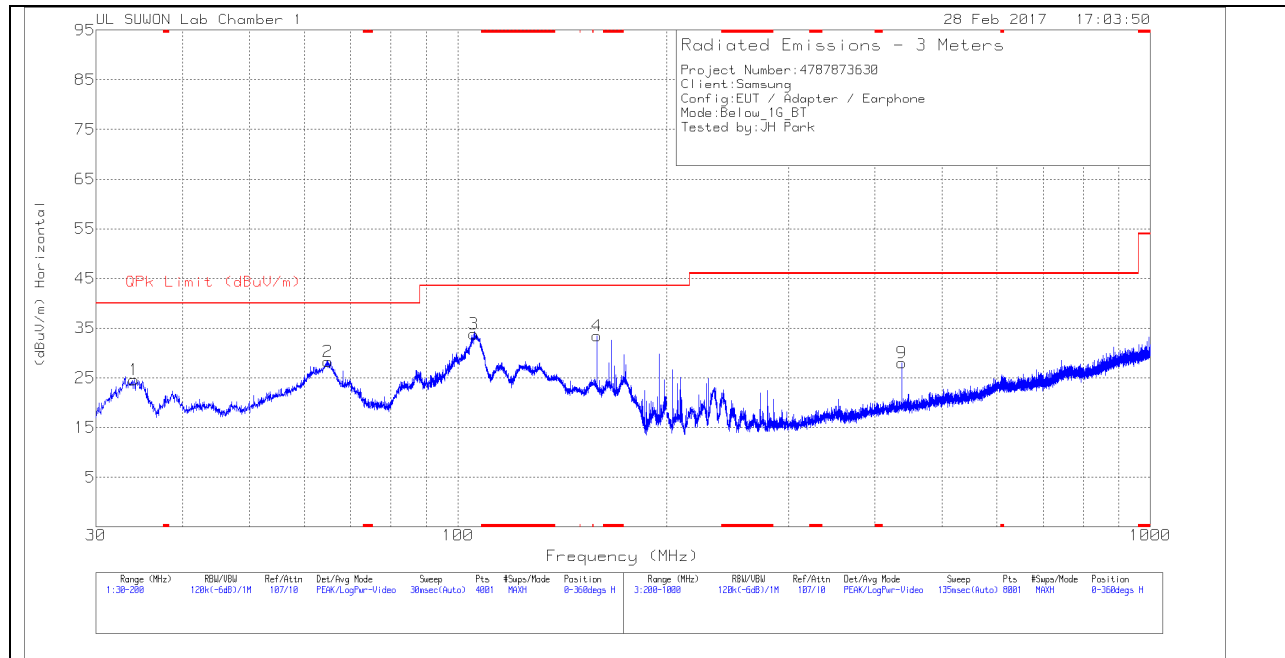

VERTICAL PLOT

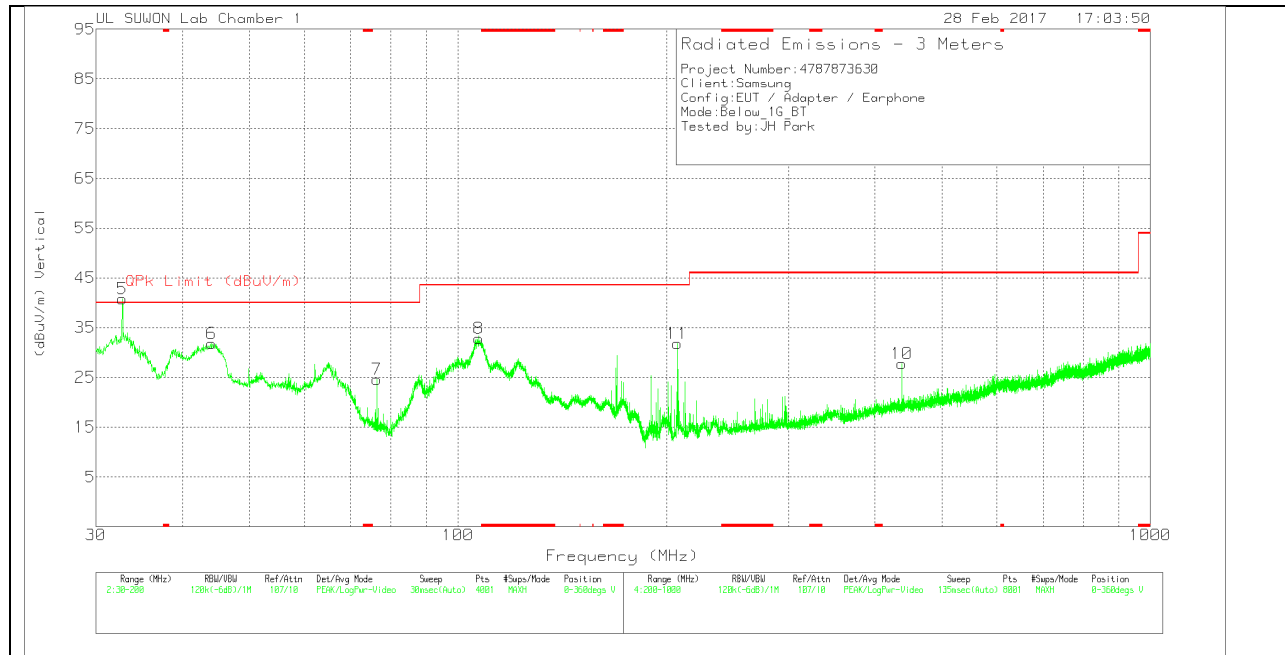

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_7 50(dB)	30-1000MHz(dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	34.0375	42.45	Pk	10.6	-28.4	24.65	40	-15.35	0-360	300	H
2	64.935	44.62	Pk	11.2	-27.6	28.22	40	-11.78	0-360	400	H
3	105.395	49.21	Pk	11.7	-27.1	33.81	43.52	-9.71	0-360	300	H
4	158.8175	52.1	Pk	8.3	-26.9	33.5	43.52	-10.02	0-360	100	H
5	32.7625	58.64	Pk	10.5	-28.3	40.84	40	.84	0-360	200	V
6	44.025	46.31	Pk	13.4	-27.9	31.81	40	-8.19	0-360	100	V
7	76.325	44.59	Pk	7.5	-27.5	24.59	40	-15.41	0-360	200	V
8	107.2225	48.65	Pk	11.5	-27.3	32.85	43.52	-10.67	0-360	100	V
9	437.6	36.88	Pk	15.9	-24.8	27.98	46.02	-18.04	0-360	200	H
10	437.5	36.61	Pk	15.9	-24.8	27.71	46.02	-18.31	0-360	200	V
11	207.6	47.63	Pk	10.8	-26.6	31.83	43.52	-11.69	0-360	100	V

Pk - Peak detector

Radiated Emissions

Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163 _750(dB)	30-1000MHz(dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
32.871	43.66	Qp	10.5	-28.3	25.86	40	-14.14	343	110	V

Qp - Quasi-Peak detector

12. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

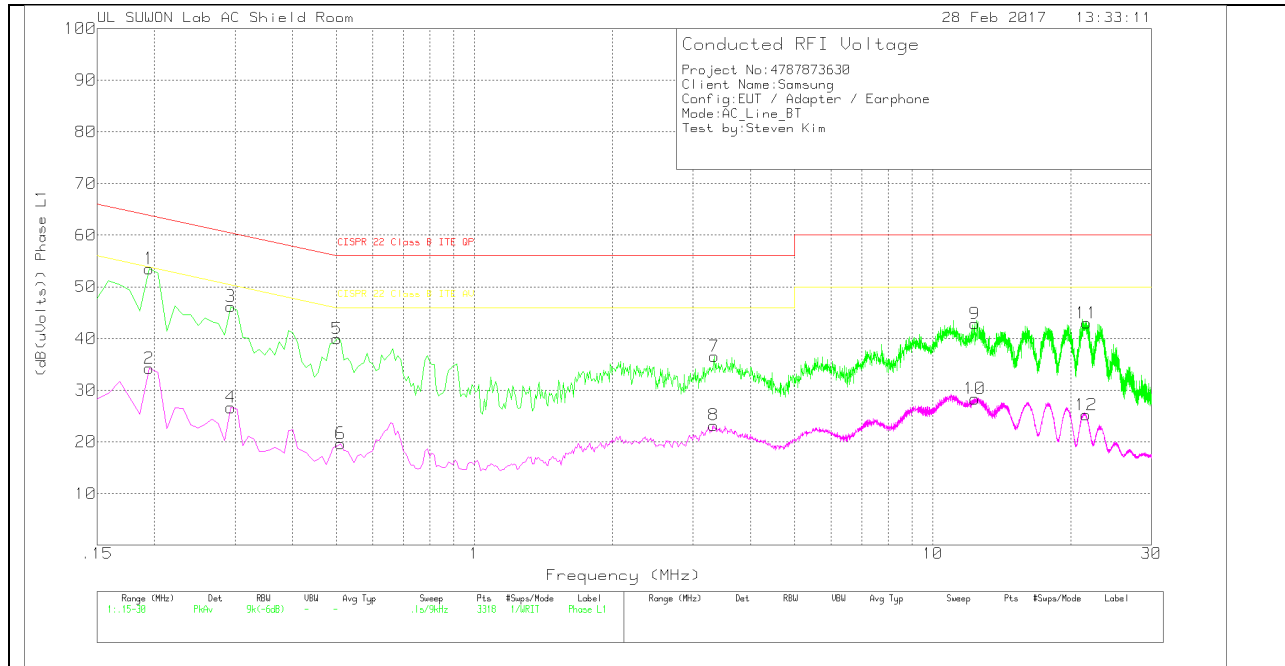

LINE 1 RESULTS

Trace Markers

Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_L1	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
1	.195	43.41	Pk	9.9	.2	53.51	63.82	-10.31	-	-
2	.195	24.15	Av	9.9	.2	34.25	-	-	53.82	-19.57
3	.294	36.29	Pk	9.7	.2	46.19	60.41	-14.22	-	-
4	.294	16.75	Av	9.7	.2	26.65	-	-	50.41	-23.76
5	.501	29.85	Pk	9.9	.2	39.95	56	-16.05	-	-
6	.51	9.56	Av	9.9	.2	19.66	-	-	46	-26.34
7	3.336	26.43	Pk	9.8	.3	36.53	56	-19.47	-	-
8	3.327	13.13	Av	9.8	.3	23.23	-	-	46	-22.77
9	12.363	32.46	Pk	10.1	.3	42.86	60	-17.14	-	-
10	12.345	17.95	Av	10.1	.3	28.35	-	-	50	-21.65
11	21.66	32.2	Pk	10.4	.4	43	60	-17	-	-
12	21.624	14.45	Av	10.4	.4	25.25	-	-	50	-24.75

Pk - Peak detector

Av - Average detection


Quasi-Peak Emissions

Phase L1 .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_L1	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.1959	42.74	Qp	9.9	.2	52.84	63.78	-10.94	-	-

Qp - Quasi-Peak detector

LINE 2 PLOT

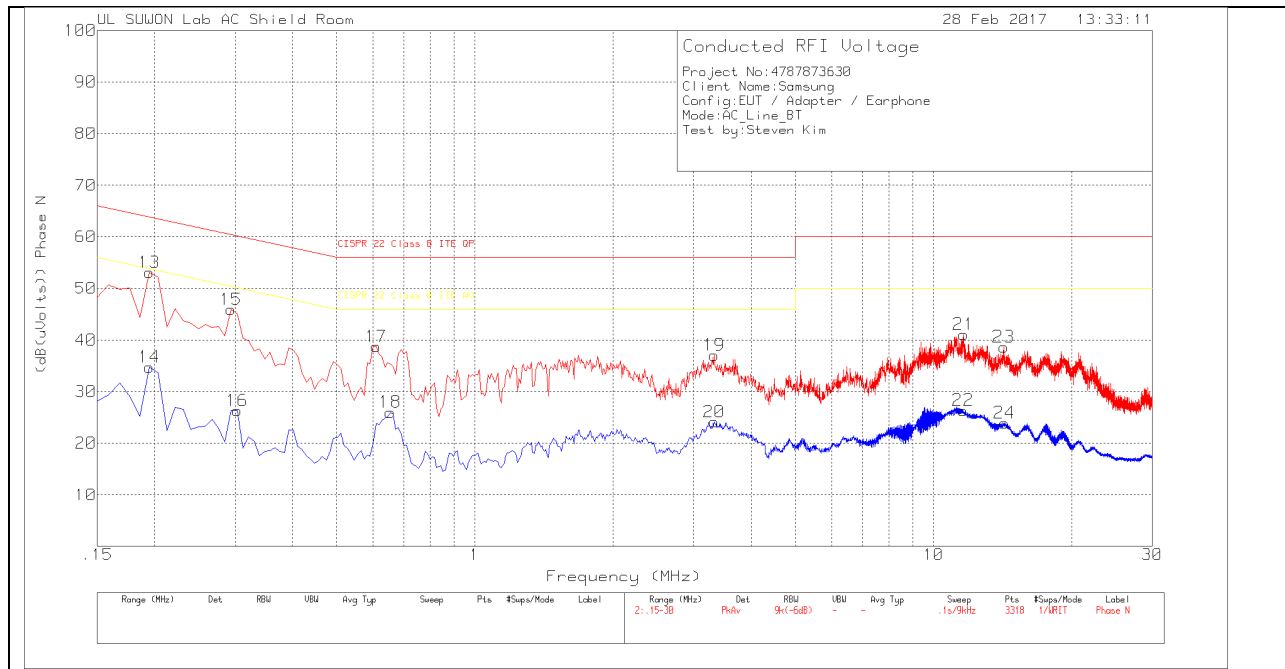

LINE 2 RESULTS

Trace Markers

Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_w ith ex- cord_N	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
13	.195	43.01	Pk	9.9	.2	53.11	63.82	-10.71	-	-
14	.195	24.65	Av	9.9	.2	34.75	-	-	53.82	-19.07
15	.294	36	Pk	9.7	.2	45.9	60.41	-14.51	-	-
16	.303	16.43	Av	9.7	.2	26.33	-	-	50.16	-23.83
17	.609	28.65	Pk	9.9	.2	38.75	56	-17.25	-	-
18	.654	15.92	Av	9.9	.2	26.02	-	-	46	-19.98
19	3.327	26.96	Pk	9.8	.3	37.06	56	-18.94	-	-
20	3.327	14.03	Av	9.8	.3	24.13	-	-	46	-21.87
21	11.643	30.58	Pk	10.2	.3	41.08	60	-18.92	-	-
22	11.598	15.87	Av	10.2	.3	26.37	-	-	50	-23.63
23	14.226	27.95	Pk	10.3	.4	38.65	60	-21.35	-	-
24	14.28	13.23	Av	10.3	.4	23.93	-	-	50	-26.07

Pk - Peak detector

Av - Average detection

Quasi-Peak Emissions

Phase N .15 - 30MHz

Frequency (MHz)	Meter Reading (dBuV)	Det	101837_wit h ex-cord_N	CABLELOSS (dB)	Corrected Reading (dB(uVolts))	CISPR 22 Class B ITE QP	Margin (dB)	CISPR 22 Class B ITE AV	Margin (dB)
.1959	42.43	Qp	9.9	.2	52.53	63.78	-11.25	-	-

Qp - Quasi-Peak detector