

FCC UNII REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
November 20, 2023

Test Site/Location:
74, Seocheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2311-FC045-R1

FCC ID:	A3LSMG556B
APPLICANT:	SAMSUNG Electronics Co., Ltd.
Model:	SM-G556B
Additional Model:	-
EUT Type:	Mobile Phone
Modulation type	OFDM
FCC Classification:	Unlicensed National Information Infrastructure(NII)
FCC Rule Part(s):	Part 15.407

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

REVIEWED BY



Report prepared by : Woong Jin Kim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
This test results were applied only to the test methods required by the standard.

Test Report Statement:

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2311-FC045	November 13, 2023	- First Approval Report
HCT-RF-2311-FC045-R1	November 20, 2023	- Added the Antenna Specification on page 5.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
EUT DESCRIPTION	5
2. MAXIMUM OUTPUT POWER	6
3. TEST METHODOLOGY	7
EUT CONFIGURATION	7
EUT EXERCISE	7
GENERAL TEST PROCEDURES	7
DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION	8
5. FACILITIES AND ACCREDITATIONS	8
5.1 FACILITIES	8
5.2 EQUIPMENT	8
6. ANTENNA REQUIREMENTS	8
7. MEASUREMENT UNCERTAINTY	9
8. DESCRIPTION OF TESTS	10
9. SUMMARY OF TEST RESULTS	27
10. TEST RESULT	28
10.1 DUTY CYCLE	28
10.2 26 dB Bandwidth	31
10.3 6 dB BANDWIDTH	34
10.4 OUTPUT POWER MEASUREMENT	36
10.5 POWER SPECTRAL DENSITY	39
10.6 FREQUENCY STABILITY	44
10.6.1 80 MHz BW	44
10.7 STRADDLE CHANNEL	60
10.7.1 26 dB Bandwidth	60
10.7.2 6 dB Bandwidth	62
10.7.3 Output Power	64
10.7.4 Power Spectral Density	67
10.8 RADIATED SPURIOUS EMISSIONS	70
10.9 RADIATED RESTRICTED BAND EDGE	80
10.10 POWERLINE CONDUCTED EMISSIONS	102
11. LIST OF TEST EQUIPMENT	104
12. ANNEX A_ TEST SETUP PHOTO	106

1. GENERAL INFORMATION

EUT DESCRIPTION

Model	SM-G556B		
Additional Model	-		
EUT Type	Mobile Phone		
Power Supply	DC 3.85 V		
Modulation Type	OFDM : 802.11a, 802.11n, 802.11ac		
Frequency Range (MHz)	U-NII-1	20 MHz BW : 5180 - 5240 40 MHz BW : 5190 - 5230 80 MHz BW : 5210	
	U-NII-2A	20 MHz BW : 5260 - 5320 40 MHz BW : 5270 - 5310 80 MHz BW : 5290	
	U-NII-2C	20 MHz BW : 5500 - 5720 40 MHz BW : 5510 - 5710 80 MHz BW : 5530 – 5690	
	U-NII-3	20 MHz BW : 5745 - 5825 40 MHz BW : 5755 - 5795 80 MHz BW : 5775	
Straddle channel	Supported		
TDWR Band	Supported		
Dynamic Frequency Selection	Slave without radar detection		
Antenna Specification	Type: SCI Peak Gain : UNII 1: -3.2 dBi UNII 2A: -3.4 dBi UNII 2C: -3.1 dBi UNII 3: -3.3 dBi		
Date(s) of Tests	October 16, 2023 ~ November 13, 2023		
Serial number	Conducted : R3CW905GZSD Radiated : R3CW905GZPW		

2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Band	Mode	Power	
		(dBm)	(W)
UNII1	802.11a	15.91	0.039
	802.11n (HT20)	15.78	0.038
	802.11n (HT40)	14.75	0.030
	802.11ac (VHT20)	15.83	0.038
	802.11ac (VHT40)	14.57	0.029
	802.11ac (VHT80)	11.94	0.016
UNII2A	802.11a	15.36	0.034
	802.11n (HT20)	15.24	0.033
	802.11n (HT40)	14.24	0.027
	802.11ac (VHT20)	15.28	0.034
	802.11ac (VHT40)	14.21	0.026
	802.11ac (VHT80)	9.95	0.010
UNII2C	802.11a	11.48	0.014
	802.11n (HT20)	11.21	0.013
	802.11n (HT40)	11.92	0.016
	802.11ac (VHT20)	11.33	0.014
	802.11ac (VHT40)	12.05	0.016
	802.11ac (VHT80)	10.79	0.012
UNII3	802.11a	13.45	0.022
	802.11n (HT20)	13.25	0.021
	802.11n (HT40)	12.24	0.017
	802.11ac (VHT20)	13.23	0.021
	802.11ac (VHT40)	12.27	0.017
	802.11ac (VHT80)	10.06	0.010

3. TEST METHODOLOGY

The measurement procedure described in FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 dated December 14, 2017 entitled “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part15, Subpart E” and ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’ were used in the measurement.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1 GHz. Above 1 GHz with 1.5 m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

4. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated March 31, 2022 (Registration Number: KR0032).

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203, §15.407:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203, §15.407


7. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.90 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.14 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.82 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.76 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.52 (Confidence level about 95 %, $k=2$)

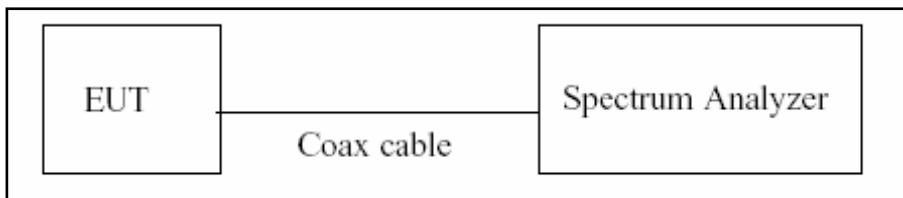8. DESCRIPTION OF TESTS**8.1. Duty Cycle****Test Configuration****Test Procedure**

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure B.2 in KDB 789033 D02 v02r01.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

8.2. 6 dB Bandwidth & 26 dB Bandwidth

Limit

Within the 5.725-5.85 GHz(NII-3), the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Configuration

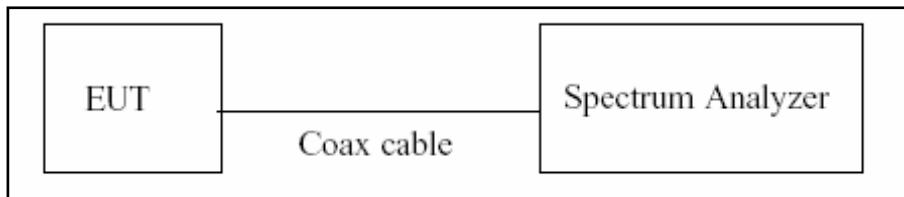

Test Procedure(26 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.1 in KDB 789033 D02 v02r01.

1. RBW = approximately 1 % of the emission bandwidth
2. VBW > RBW
3. Detector = Peak
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Test Procedure (6 dB Bandwidth)

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure C.2 in KDB 789033 D02 v02r01.

1. RBW = 100 kHz
2. VBW \geq 3 x RBW
3. Detector = Peak
4. Trace mode = max hold
5. Allow the trace to stabilize
6. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points(upper and lower frequencies) that are attenuated by 6 dB relative to the maximum lever measured in the fundamental emission.

Note:

1. We tested X dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.
2. DFS test channels should be defined. So, We performed the OBW test to prove that no part of the fundamental emissions of any channels belong to UNII1 and UNII3 band for DFS.
3. The 26 dB bandwidth is used to determine the conducted power limits.


8.3. Output Power Measurement

Limit


Band	Limit
UNII 1	- Master : Not exceed 1 W(=30 dBm) - Slave : Not exceed 250 mW(=23.98 dBm)
UNII 2A, 2C	Not exceed the lesser of 250 mW or 11 dBm + 10 log B, (where B is the 26 dB emission bandwidth in megahertz.)
UNII 3	Not exceed 1 W(=30 dBm)

Test Configuration

Power Meter

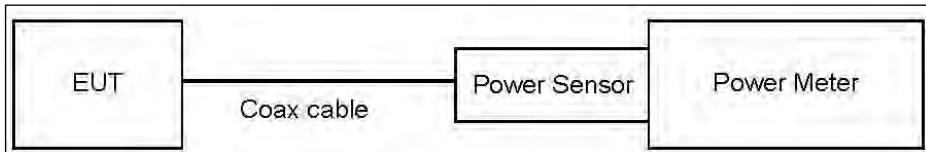

Spectrum Analyzer(Only Straddle Channel)

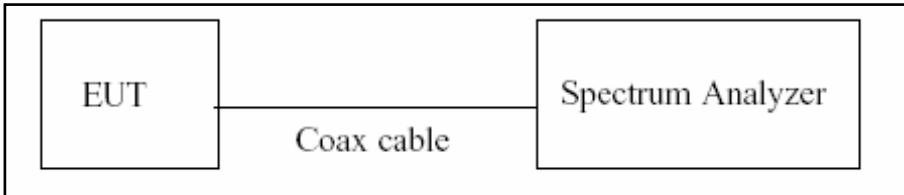

Test Procedure(Power Meter)

We tested according to Procedure E.3.a in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
3. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Test Procedure (Spectrum Analyzer)

The transmitter output is connected to the Spectrum Analyzer.

We use the spectrum analyzer's integrated band power measurement function.

We tested according to Procedure E.2.d) in KDB 789033 D02 v02r01.

1. Measure the duty cycle.
2. Set span to encompass the 26 dB EBW of the signal.
3. RBW = 1 MHz.
4. VBW \geq 3 MHz.
5. Number of points in sweep \geq 2 x span/RBW.
6. Sweep time = auto.
7. Detector = RMS.
8. Do not use sweep triggering. Allow the sweep to "free run".
9. Trace average at least 100 traces in power averaging(RMS) mode
10. Integrated bandwidth = OBW
11. Add $10\log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation

Total Power(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The power results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	20.84
UNII 2A	20.84
UNII 2C	20.84
UNII 3	20.84


(Actual value of loss for the attenuator and cable combination)

8.4. Power Spectral Density

Limit

Band	Limit
UNII 1	11 dBm/MHz
UNII 2A, 2C	11 dBm/MHz
UNII 3	30 dBm/500 kHz

Test Configuration

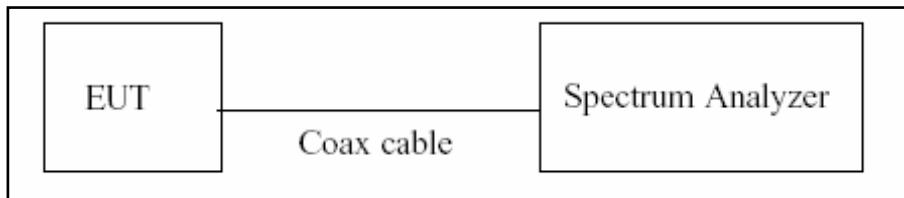

Test Procedure

We tested according to Procedure F in KDB 789033 D02 v02r01.

1. Set span to encompass the entire emission bandwidth(EBW) of the signal.
2. RBW = 1 MHz (510 kHz for UNII 3)
3. VBW \geq 3 MHz
4. Number of points in sweep \geq 2 x span/RBW.
5. Sweep time = auto.
6. Detector = RMS(i.e., power averaging), if available. Otherwise, use sample detector mode.
7. Do not use sweep triggering. Allow the sweep to “free run”.
8. Trace average at least 100 traces in power averaging(RMS) mode
9. Use the peak search function on the spectrum analyzer to find the peak of the spectrum.
10. If Method SA-2 was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

Sample Calculation

Total PSD(dBm) = Measured Value(dBm) + ATT loss(dB) + Cable loss(dB) + Duty Cycle Factor(dB)

Note

1. Spectrum Measured Levels are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset Loss = Attenuator loss(20 dB) + Cable loss

3. Actual value of loss for the attenuator and cable combination is below table.

Band	Loss(dB)
UNII 1	20.84
UNII 2A	20.84
UNII 2C	20.84
UNII 3	20.84


(Actual value of loss for the attenuator and cable combination)

8.5. Frequency Stability

Limit

Maintained within the band

Test Configuration

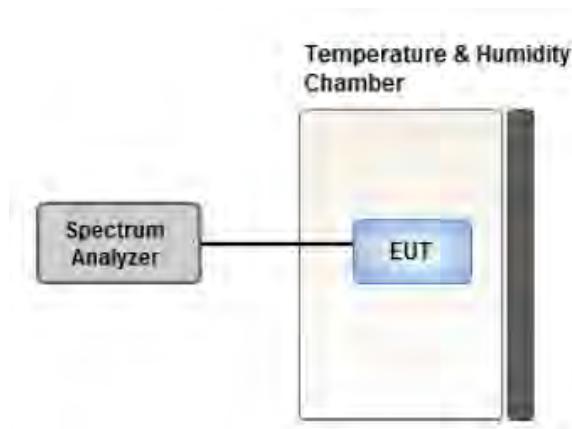

Test Procedure

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -30 °C and 50 °C.
2. The temperature was incremented by 10 °C intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.
4. While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.

8.6. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor


8.7. Radiated Test**Limit**

1. UNII 1: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
2. UNII 2A, 2C: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
3. UNII 3: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Section 15.209.


Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

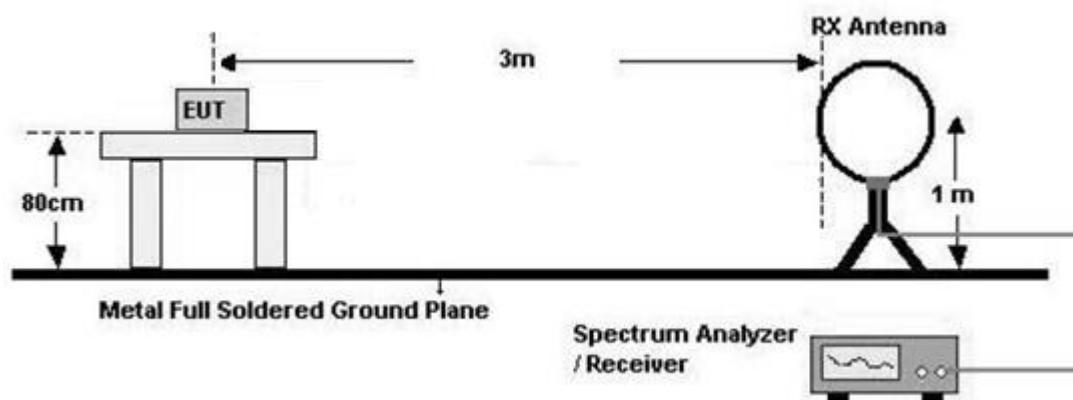

30 MHz - 1 GHz

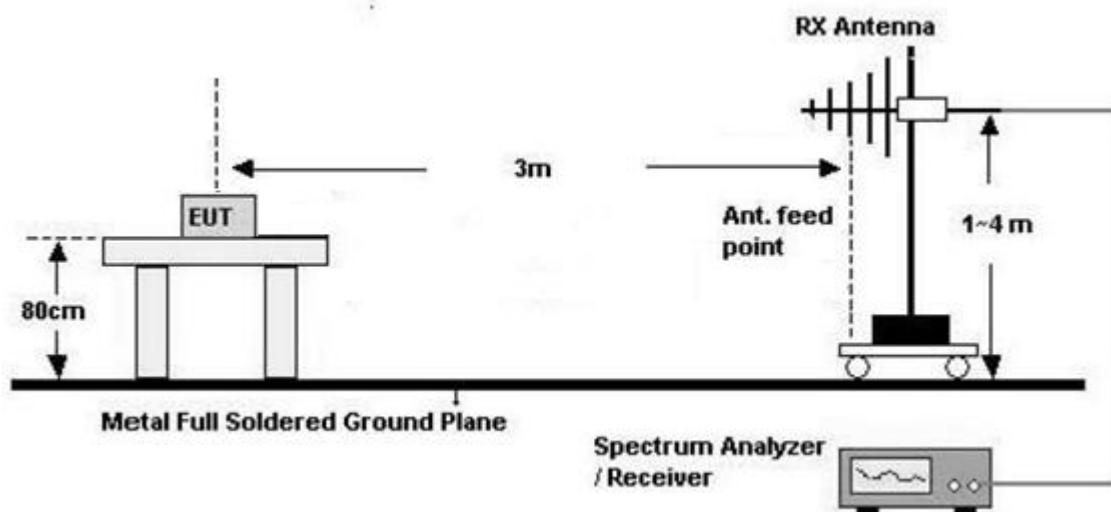

Above 1 GHz

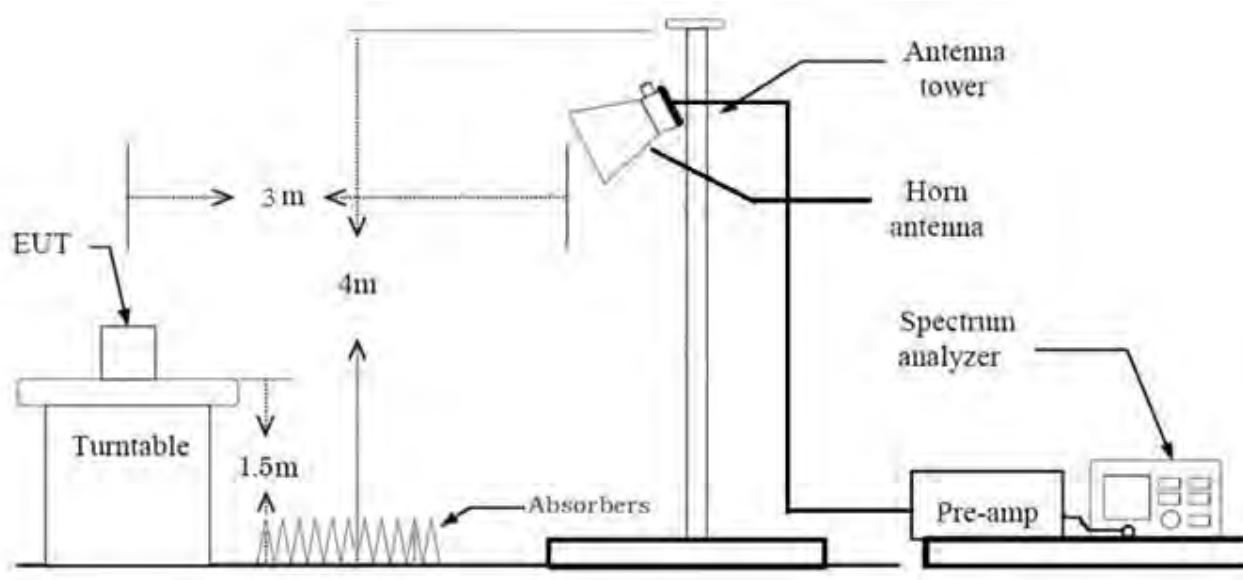

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8 m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1 GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8 m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1 m to 4 m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

* In general, (1) is used mainly

7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type (Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type (Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 %) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 %) = VBW \geq 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimym number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor
10. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency
11. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
12. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Distance Factor(D.F)

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1 m to 4 m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting

(1) Measurement Type(Peak, G.5 in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW \geq 3 MHz
- Detector = Peak
- Sweep Time = auto
- Trace mode = max hold
- Allow sweeps to continue until the trace stabilizes.

Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle.

(2) Measurement Type(Average, G.6.d in KDB 789033 v02r01):

- RBW = 1 MHz
- VBW(Duty cycle \geq 98 %) = VBW \leq RBW/100(i.e., 10 kHz) but not less than 10 Hz.
- VBW(Duty cycle is < 98 %) = VBW \geq 1/T, where T is the minimum transmission duration.
- The analyzer is set to linear detector mode.
- Detector = Peak.
- Sweep time = auto.
- Trace mode = max hold.
- Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 % duty cycle. For lower duty cycles, increase the minimym number of traces by a factor of $1/x$, where x is the duty cycle.

9. Measured Frequency Range :

- 4 500 MHz ~ 5 150 MHz
- 5 350 MHz ~ 5 460 MHz
- 5 460 MHz ~ 5 470 MHz
- (75 MHz or more below the 5 725 MHz) ~ 5 725 MHz
- 5 850 MHz ~ (75 MHz or more above the 5 850 MHz)

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(A.G) + Attenuator(ATT)
+ Distance Factor(D.F)

The actual setting value of VBW

Mode	Worst Data rate (Mbps)	Duty Cycle	Duty Cycle Factor (dB)	The actual setting value of VBW (Hz)
802.11a	6	0.968	0.140	1 000
802.11n(HT20)	MCS0	0.966	0.150	1 000
802.11n(HT40)	MCS0	0.938	0.279	3 000
802.11ac(VHT20)	MCS0	0.966	0.148	1 000
802.11ac(VHT40)	MCS0	0.938	0.278	3 000
802.11ac(VHT80)	MCS0	0.784	1.057	5 000

8.8. Worst case configuration and mode

Conducted test

1. All datarate of operation were investigated and the worst case datarate results are reported.

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : X
- Radiated Restricted Band Edge : Y

3. All datarate of operation were investigated and the worst case datarate results are reported.

- 802.11a : 6 Mbps
- 802.11n_HT20 : MCS0
- 802.11n_HT40 : MCS0
- 802.11ac_VHT20 : MCS0
- 802.11ac_VHT40 : MCS0
- 802.11ac_VHT80 : MCS0

4. Radiated Spurious Emission

- All modulation of operation were investigated and the worst case modulation results are reported.
(Worstcase : 802.11a_6 Mbps)

5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.

- Position : Horizontal, Vertical, Parallel to the ground plane

Radiated test(RSDB)

1. All modes of operation were investigated and the worst case configuration results are reported.

- Mode : Stand alone, Stand alone + External accessories(Earphone., etc)
- Worstcase : Stand alone

2. EUT Axis

- Radiated Spurious Emissions : Z

3. The following tables show the worst case configurations determined during testing.

Description	Bluetooth Emission	5 GHz Emission
Antenna	WIFI/BT	WIFI/BT
Channel	39	64
Data Rate	1 Mbps	6 Mbps
Mode	GFSK: DH5	802.11a

Note : Bluetooth RSDB Data refer to [BT] Test Report.

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter

9. SUMMARY OF TEST RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
26 dB Bandwidth	§15.407 (for Power Measurement)	N/A		PASS
6 dB Bandwidth	§15.407(e)	> 500 kHz (5725-5850 MHz)(UNII-3)		PASS
Maximum Conducted Output Power	§15.407(a)(1),(2),(3)	< 250 mW(5150-5250 MHz) < 250 mW or $11+10\log_{10}$ (BW) dBm (5250-5350 MHz) < 250 mW or $11+10\log_{10}$ (BW) dBm (5470-5725 MHz) <1 W (5725-5850 MHz)	Conducted	PASS
Maximum Power Spectral Density	§15.407(a)(1),(2),(3)	<11 dBm/ MHz (5150-5250 MHz) <11 dBm/ MHz (5250-5350 MHz) <11 dBm/ MHz (5470-5725 MHz) <30 dBm/500 kHz(5725-5850 MHz)		PASS
AC Conducted Emissions 150 kHz-30 MHz	15.207 15.407(b)(9)	<FCC 15.207 limits		PASS
Frequency Stability	§15.407(g) §2.1055	Maintained within the band		PASS
Undesirable Emissions	§15.407(b) (1),(2),(3),(4)	<-27 dBm/MHz EIRP (UNII1, 2A, 2C) cf. Section 8.6 (UNII 3)		PASS
General Field Strength Limits(Restricted Bands and Radiated Emission Limits)	15.205, 15.407(b)(9),(10)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	PASS

10. TEST RESULT

10.1 DUTY CYCLE

Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11a	6	1.391	1.436	0.968	0.140
	9	0.937	0.983	0.954	0.206
	12	0.709	0.752	0.943	0.256
	18	0.481	0.527	0.913	0.393
	24	0.362	0.408	0.888	0.515
	36	0.253	0.405	0.625	2.041
	48	0.193	0.408	0.472	3.260
	54	0.175	0.400	0.437	3.598


Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11n (HT20)	0	1.300	1.345	0.966	0.150
	1	0.669	0.714	0.936	0.286
	2	0.459	0.504	0.910	0.412
	3	0.352	0.408	0.863	0.638
	4	0.246	0.400	0.614	2.119
	5	0.195	0.413	0.472	3.257
	6	0.180	0.395	0.455	3.419
	7	0.165	0.398	0.414	3.830
802.11n (HT40)	0	0.649	0.692	0.938	0.279
	1	0.345	0.406	0.849	0.713
	2	0.238	0.410	0.580	2.364
	3	0.190	0.408	0.466	3.318
	4	0.139	0.400	0.348	4.583
	5	0.114	0.403	0.283	5.482
	6	0.104	0.400	0.259	5.859
	7	0.099	0.405	0.244	6.131

Mode	MCS Index	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor(dB)
802.11ac (VHT20)	0	1.312	1.358	0.966	0.148
	1	0.676	0.722	0.937	0.283
	2	0.464	0.509	0.910	0.407
	3	0.360	0.413	0.871	0.599
	4	0.251	0.405	0.619	2.085
	5	0.200	0.415	0.482	3.172
	6	0.182	0.400	0.456	3.413
	7	0.167	0.403	0.415	3.819
	8	0.147	0.410	0.358	4.461
802.11ac (VHT40)	0	0.651	0.694	0.938	0.278
	1	0.347	0.400	0.867	0.619
	2	0.243	0.405	0.600	2.218
	3	0.198	0.413	0.479	3.201
	4	0.142	0.395	0.359	4.449
	5	0.122	0.400	0.304	5.174
	6	0.109	0.405	0.269	5.707
	7	0.104	0.408	0.255	5.940
	8	0.091	0.405	0.225	6.478
	9	0.089	0.403	0.220	6.573
802.11ac (VHT80)	0	0.322	0.410	0.784	1.057
	1	0.185	0.400	0.462	3.353
	2	0.137	0.395	0.346	4.607
	3	0.114	0.408	0.280	5.536
	4	0.086	0.410	0.210	6.780
	5	0.073	0.398	0.185	7.335
	6	0.071	0.403	0.176	7.542
	7	0.071	0.403	0.176	7.542
	8	0.064	0.404	0.158	8.017
	9	0.064	0.404	0.158	8.017


Note:

In order to simplify the report, attached plots were only the lowest datarate.


802.11a

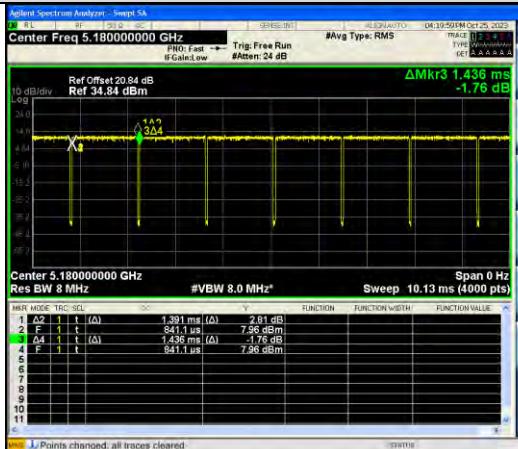


802.11n(HT20)

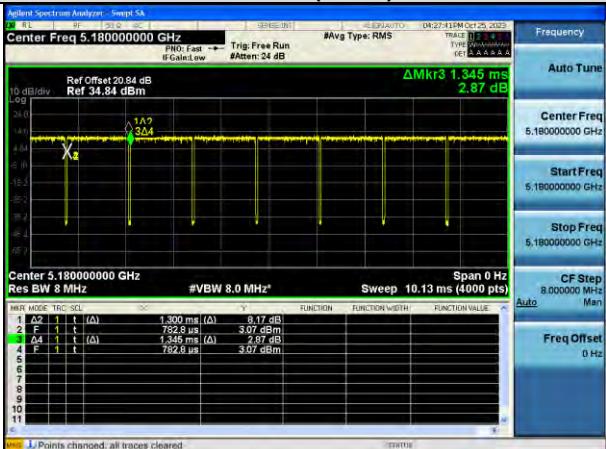


802.11n(HT40)

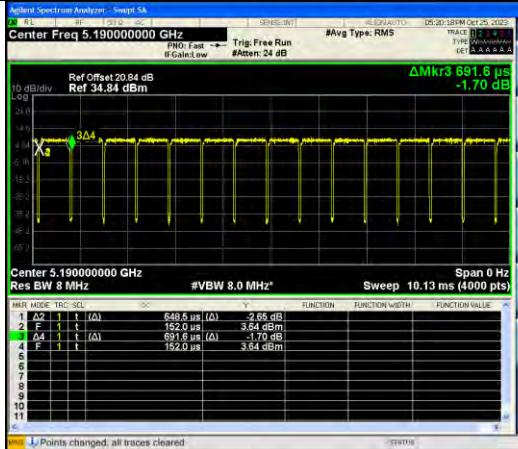


802.11ac(VHT20)

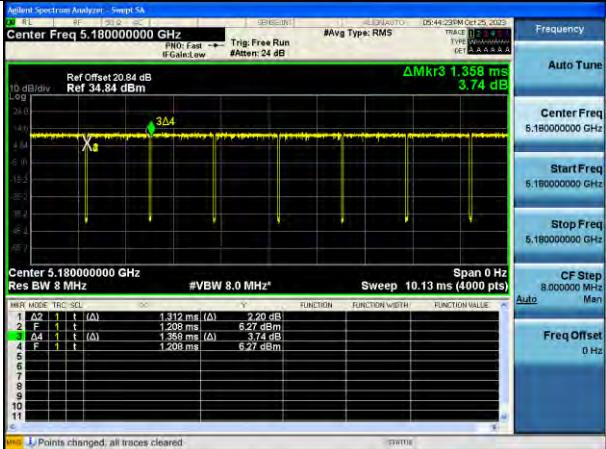

802.11ac(VHT40)

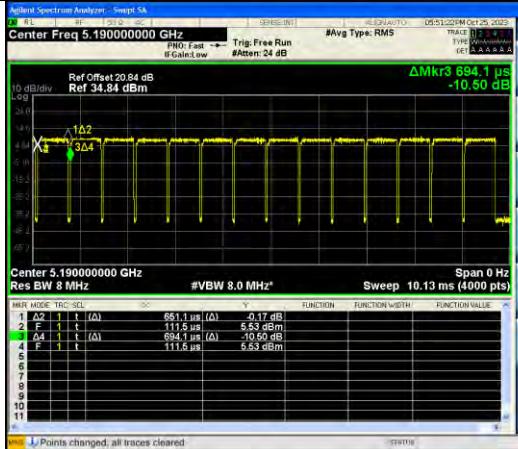

802.11ac(VHT80)

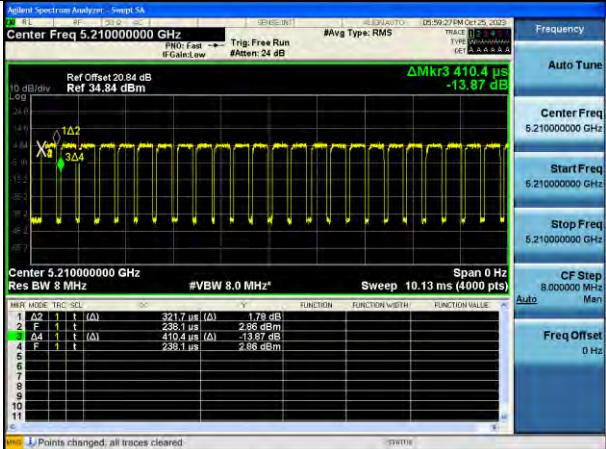

10.2 26 dB Bandwidth

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.1.

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11a	5180	36	27.28	16.877
	5200	40	25.78	16.848
	5240	48	27.62	16.812
	5260	52	24.58	16.651
	5300	60	25.66	16.730
	5320	64	24.41	16.735
	5500	100	28.43	16.795
	5600	120	26.43	16.748
	5720	144	25.94	16.709
	5745	149	26.44	16.757
	5785	157	26.76	16.734
	5825	165	24.63	16.759

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT20)	5180	36	29.29	17.835
	5200	40	28.39	17.837
	5240	48	27.79	17.844
	5260	52	26.54	17.671
	5300	60	25.13	17.693
	5320	64	22.84	17.697
	5500	100	27.36	17.768
	5600	120	26.37	17.759
	5720	144	27.38	17.744
	5745	149	24.64	17.706
	5785	157	25.67	17.700
	5825	165	26.56	17.731

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT20)	5180	36	26.39	17.807
	5200	40	29.33	17.822
	5240	48	29.46	17.832
	5260	52	24.86	17.663
	5300	60	24.76	17.693
	5320	64	24.89	17.694
	5500	100	27.40	17.787
	5600	120	26.79	17.787
	5720	144	24.72	17.720
	5745	149	25.09	17.688
	5785	157	24.65	17.721
	5825	165	23.52	17.693

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11n (HT40)	5190	38	65.32	36.399
	5230	46	68.48	36.526
	5270	54	64.88	36.230
	5310	62	64.83	36.261
	5510	102	65.21	36.340
	5590	118	63.92	36.393
	5710	142	64.51	36.308
	5755	151	64.93	36.343
	5795	159	65.44	36.300

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT40)	5190	38	67.96	36.312
	5230	46	64.86	36.332
	5270	54	40.90	36.124
	5310	62	42.38	36.212
	5510	102	60.96	36.287
	5590	118	61.09	36.286
	5710	142	64.81	36.242
	5755	151	44.69	36.225
	5795	159	58.50	36.291

Mode	Frequency [MHz]	Channel No.	26 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
802.11ac (VHT80)	5210	42	81.78	75.608
	5290	58	80.74	75.329
	5530	106	80.67	75.496
	5610	122	94.80	75.508
	5690	138	84.96	75.615
	5775	155	81.05	75.603

□ Test Plots

Note:

In order to simplify the report, attached plots were only the widest channel per channel bandwidth.



10.3 6 dB BANDWIDTH

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	5745	149	15.17	0.500
	5785	157	15.04	0.500
	5825	165	15.12	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT20)	5745	149	15.15	0.500
	5785	157	15.11	0.500
	5825	165	15.15	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT20)	5745	149	15.15	0.500
	5785	157	15.06	0.500
	5825	165	15.08	0.500


Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11n(HT40)	5755	151	35.13	0.500
	5795	159	35.16	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT40)	5755	151	35.17	0.500
	5795	159	35.17	0.500

Mode	Frequency [MHz]	Channel No.	6 dB Bandwidth [MHz]	Limit [MHz]
802.11ac(VHT80)	5775	155	75.31	0.500

☒ Test Plots

Note: In order to simplify the report, attached plots were only the narrowest channel.

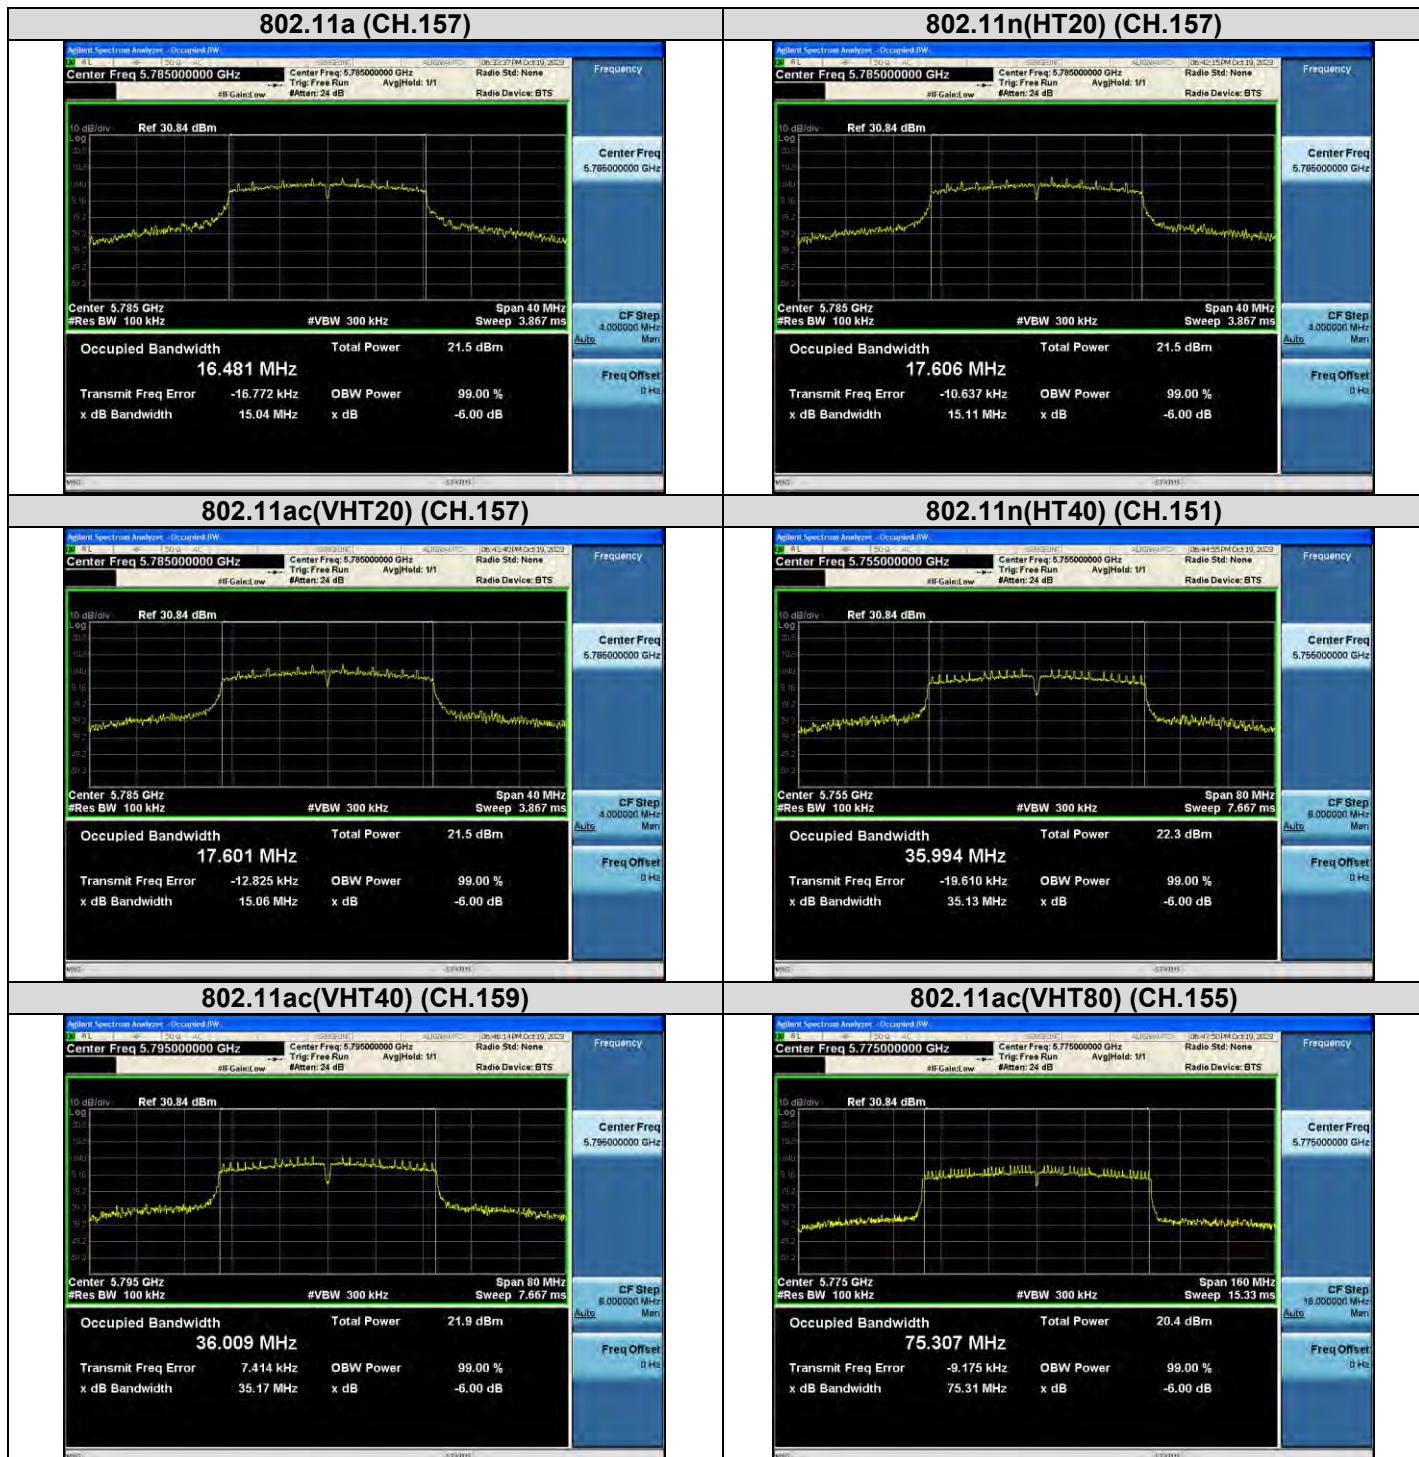

10.4 OUTPUT POWER MEASUREMENT

Straddle channel data in the table below are for reporting purposes only.

Straddle channel data were added in section 10.7.3.

Limit

(UNII 1) : 23.98 dBm

(UNII 2A, 2C) : 23.98 dBm or $11 \text{ dBm} + 10 \log B$, (where B is the 26 dB emission bandwidth in megahertz.)

(UNII 3) : 30.00 dBm

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5180	36	6M	a	15.18	0.140	15.32	23.98
5200	40	6M	a	15.38	0.140	15.52	23.98
5240	48	6M	a	15.77	0.140	15.91	23.98
5260	52	6M	a	15.00	0.140	15.14	23.98
5300	60	6M	a	15.22	0.140	15.36	23.98
5320	64	6M	a	15.04	0.140	15.18	23.98
5500	100	6M	a	11.34	0.140	11.48	23.98
5600	120	6M	a	11.14	0.140	11.28	23.98
5720	144	48M	a	7.14	3.260	10.40	23.98
5745	149	6M	a	12.87	0.140	13.01	30.00
5785	157	6M	a	13.25	0.140	13.39	30.00
5825	165	6M	a	13.31	0.140	13.45	30.00

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5180	36	MCS0	n20	15.08	0.150	15.23	23.98
5200	40	MCS0	n20	15.27	0.150	15.42	23.98
5240	48	MCS0	n20	15.64	0.150	15.78	23.98
5260	52	MCS0	n20	14.88	0.150	15.03	23.98
5300	60	MCS0	n20	15.09	0.150	15.24	23.98
5320	64	MCS0	n20	14.99	0.150	15.14	23.98
5500	100	MCS5	n20	7.95	3.257	11.21	23.98
5600	120	MCS5	n20	7.68	3.257	10.94	23.98
5720	144	MCS4	n20	8.18	2.119	10.30	23.98
5745	149	MCS0	n20	12.71	0.150	12.86	30.00
5785	157	MCS0	n20	13.04	0.150	13.19	30.00
5825	165	MCS0	n20	13.10	0.150	13.25	30.00

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5180	36	MCS0	ac20	14.97	0.148	15.12	23.98
5200	40	MCS0	ac20	15.20	0.148	15.35	23.98
5240	48	MCS0	ac20	15.68	0.148	15.83	23.98
5260	52	MCS0	ac20	14.88	0.148	15.03	23.98
5300	60	MCS0	ac20	15.13	0.148	15.28	23.98
5320	64	MCS0	ac20	14.76	0.148	14.91	23.98
5500	100	MCS4	ac20	9.24	2.085	11.33	23.98
5600	120	MCS5	ac20	7.77	3.172	10.95	23.98
5720	144	MCS4	ac20	8.34	2.085	10.43	23.98
5745	149	MCS0	ac20	12.71	0.148	12.86	30.00
5785	157	MCS0	ac20	13.07	0.148	13.22	30.00
5825	165	MCS0	ac20	13.08	0.148	13.23	30.00

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5190	38	MCS2	n40	11.11	2.364	13.48	23.98
5230	46	MCS2	n40	12.38	2.364	14.75	23.98
5270	54	MCS2	n40	11.87	2.364	14.24	23.98
5310	62	MCS2	n40	10.66	2.364	13.02	23.98
5510	102	MCS3	n40	8.60	3.318	11.92	23.98
5590	118	MCS0	n40	11.52	0.279	11.80	23.98
5710	142	MCS0	n40	10.85	0.279	11.13	23.98
5755	151	MCS0	n40	11.75	0.279	12.03	30.00
5795	159	MCS2	n40	9.87	2.364	12.24	30.00

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5190	38	MCS3	ac40	10.14	3.201	13.34	23.98
5230	46	MCS3	ac40	11.37	3.201	14.57	23.98
5270	54	MCS3	ac40	11.01	3.201	14.21	23.98
5310	62	MCS3	ac40	9.75	3.201	12.95	23.98
5510	102	MCS0	ac40	11.77	0.278	12.05	23.98
5590	118	MCS0	ac40	11.50	0.278	11.77	23.98
5710	142	MCS0	ac40	10.76	0.278	11.04	23.98
5755	151	MCS0	ac40	11.82	0.278	12.09	30.00
5795	159	MCS3	ac40	9.07	3.201	12.27	30.00

Frequency [MHz]	Channel	Datarate	Mode	Mea. Power [dBm]	D.C.F [dB]	Total Power [dBm]	Limit [dBm]
5210	42	MCS0	ac80	10.88	1.057	11.94	23.98
5290	58	MCS0	ac80	8.90	1.057	9.95	23.98
5530	106	MCS0	ac80	8.98	1.057	10.04	23.98
5610	122	MCS0	ac80	9.73	1.057	10.79	23.98
5690	138	MCS0	ac80	9.25	1.057	10.31	23.98
5775	155	MCS0	ac80	9.00	1.057	10.06	30.00

10.5 POWER SPECTRAL DENSITY

Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5180	36	6M	a	4.758	0.140	4.898	11 dBm/MHz
5200	40	6M	a	4.757	0.140	4.897	11 dBm/MHz
5240	48	6M	a	5.260	0.140	5.400	11 dBm/MHz
5260	52	6M	a	4.632	0.140	4.772	11 dBm/MHz
5300	60	6M	a	4.554	0.140	4.694	11 dBm/MHz
5320	64	6M	a	4.401	0.140	4.541	11 dBm/MHz
5500	100	6M	a	0.762	0.140	0.902	11 dBm/MHz
5600	120	6M	a	0.663	0.140	0.803	11 dBm/MHz
5720	144	48M	a	-2.773	3.260	0.487	11 dBm/MHz
5745	149	6M	a	-0.123	0.140	0.017	30 dBm/500kHz
5785	157	6M	a	0.525	0.140	0.665	30 dBm/500kHz
5825	165	6M	a	0.403	0.140	0.543	30 dBm/500kHz

Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5180	36	MCS0	n20	4.534	0.150	4.684	11 dBm/MHz
5200	40	MCS0	n20	4.777	0.150	4.927	11 dBm/MHz
5240	48	MCS0	n20	5.122	0.150	5.272	11 dBm/MHz
5260	52	MCS0	n20	4.540	0.150	4.690	11 dBm/MHz
5300	60	MCS0	n20	4.378	0.150	4.528	11 dBm/MHz
5320	64	MCS0	n20	4.459	0.150	4.609	11 dBm/MHz
5500	100	MCS5	n20	-2.204	3.257	1.053	11 dBm/MHz
5600	120	MCS5	n20	-2.523	3.257	0.734	11 dBm/MHz
5720	144	MCS4	n20	-1.662	2.119	0.457	11 dBm/MHz
5745	149	MCS0	n20	-0.426	0.150	-0.276	30 dBm/500kHz
5785	157	MCS0	n20	0.204	0.150	0.354	30 dBm/500kHz
5825	165	MCS0	n20	0.198	0.150	0.348	30 dBm/500kHz

Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5180	36	MCS0	ac20	4.542	0.148	4.690	11 dBm/MHz
5200	40	MCS0	ac20	4.910	0.148	5.058	11 dBm/MHz
5240	48	MCS0	ac20	4.963	0.148	5.111	11 dBm/MHz
5260	52	MCS0	ac20	4.512	0.148	4.660	11 dBm/MHz
5300	60	MCS0	ac20	4.394	0.148	4.542	11 dBm/MHz
5320	64	MCS0	ac20	4.354	0.148	4.502	11 dBm/MHz
5500	100	MCS4	ac20	-1.200	2.085	0.885	11 dBm/MHz
5600	120	MCS5	ac20	-2.064	3.172	1.108	11 dBm/MHz
5720	144	MCS4	ac20	-1.657	2.085	0.428	11 dBm/MHz
5745	149	MCS0	ac20	-0.446	0.148	-0.298	30 dBm/500kHz
5785	157	MCS0	ac20	0.331	0.148	0.479	30 dBm/500kHz
5825	165	MCS0	ac20	0.167	0.148	0.315	30 dBm/500kHz

Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5190	38	MCS2	n40	-2.092	2.364	0.272	11 dBm/MHz
5230	46	MCS2	n40	-0.397	2.364	1.967	11 dBm/MHz
5270	54	MCS2	n40	-1.627	2.364	0.737	11 dBm/MHz
5310	62	MCS2	n40	-2.805	2.364	-0.441	11 dBm/MHz
5510	102	MCS3	n40	-4.834	3.318	-1.516	11 dBm/MHz
5590	118	MCS0	n40	-2.364	0.279	-2.085	11 dBm/MHz
5710	142	MCS0	n40	-2.795	0.279	-2.516	11 dBm/MHz
5755	151	MCS0	n40	-4.681	0.279	-4.402	30 dBm/500kHz
5795	159	MCS2	n40	-5.938	2.364	-3.574	30 dBm/500kHz


Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5190	38	MCS3	ac40	-2.939	3.201	0.262	11 dBm/MHz
5230	46	MCS3	ac40	-1.982	3.201	1.219	11 dBm/MHz
5270	54	MCS3	ac40	-2.741	3.201	0.460	11 dBm/MHz
5310	62	MCS3	ac40	-3.357	3.201	-0.156	11 dBm/MHz
5510	102	MCS0	ac40	-2.044	0.278	-1.766	11 dBm/MHz
5590	118	MCS0	ac40	-2.166	0.278	-1.888	11 dBm/MHz
5710	142	MCS0	ac40	-3.067	0.278	-2.789	11 dBm/MHz
5755	151	MCS0	ac40	-4.612	0.278	-4.334	30 dBm/500kHz
5795	159	MCS3	ac40	-7.191	3.201	-3.990	30 dBm/500kHz




Frequency [MHz]	Channel	Datarate	Mode	Mea. PSD [dBm/MHz]	D.C.F [dB]	Total PSD [dBm/MHz]	Limit
5210	42	MCS0	ac80	-5.430	1.057	-4.373	11 dBm/MHz
5290	58	MCS0	ac80	-7.125	1.057	-6.068	11 dBm/MHz
5530	106	MCS0	ac80	-7.224	1.057	-6.167	11 dBm/MHz
5610	122	MCS0	ac80	-6.432	1.057	-5.375	11 dBm/MHz
5690	138	MCS0	ac80	-7.501	1.057	-6.444	11 dBm/MHz
5775	155	MCS0	ac80	-10.044	1.057	-8.987	30 dBm/500kHz

Test Plots

Note:

In order to simplify the report, attached plots were only channel of the highest power.

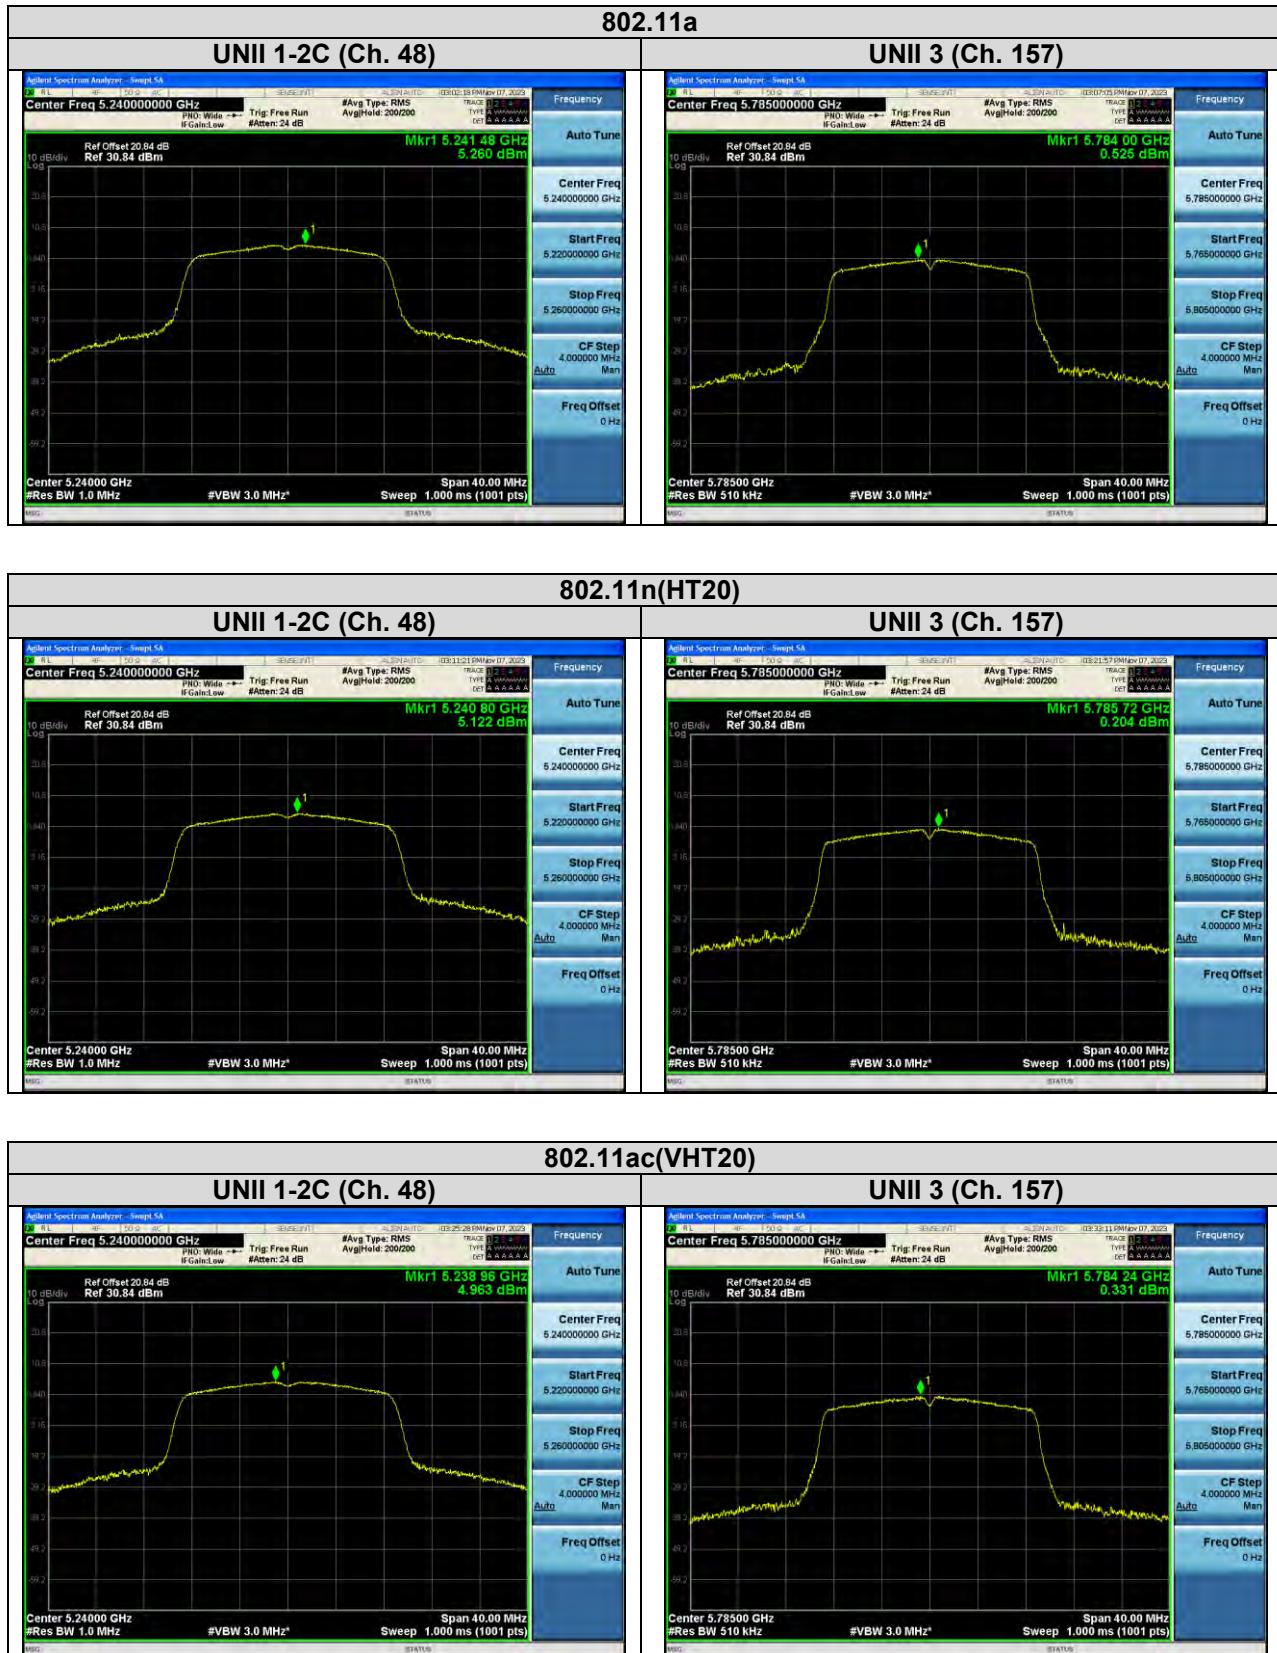

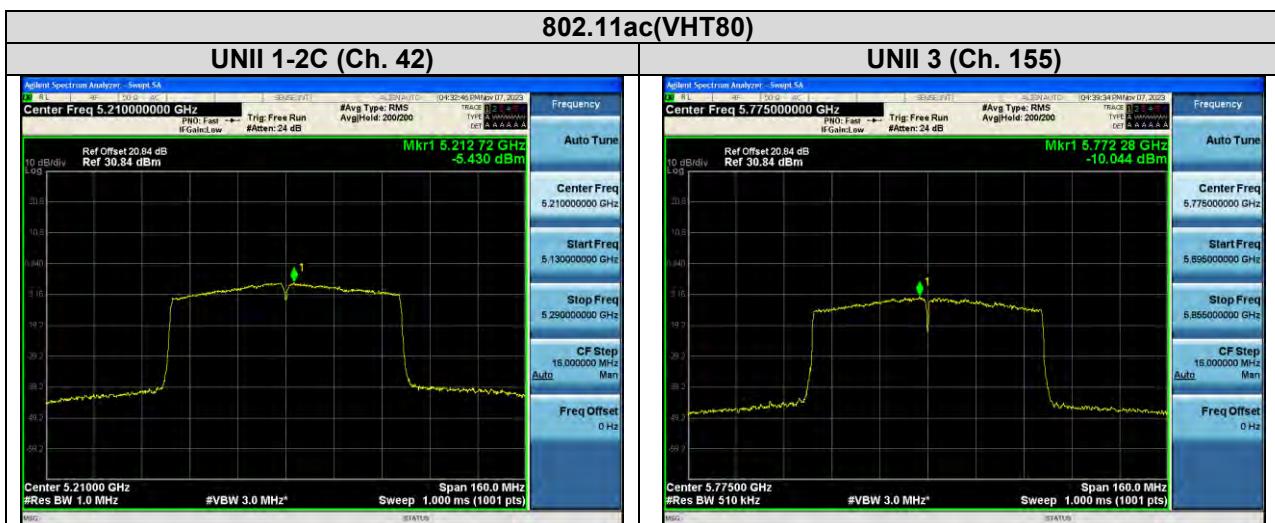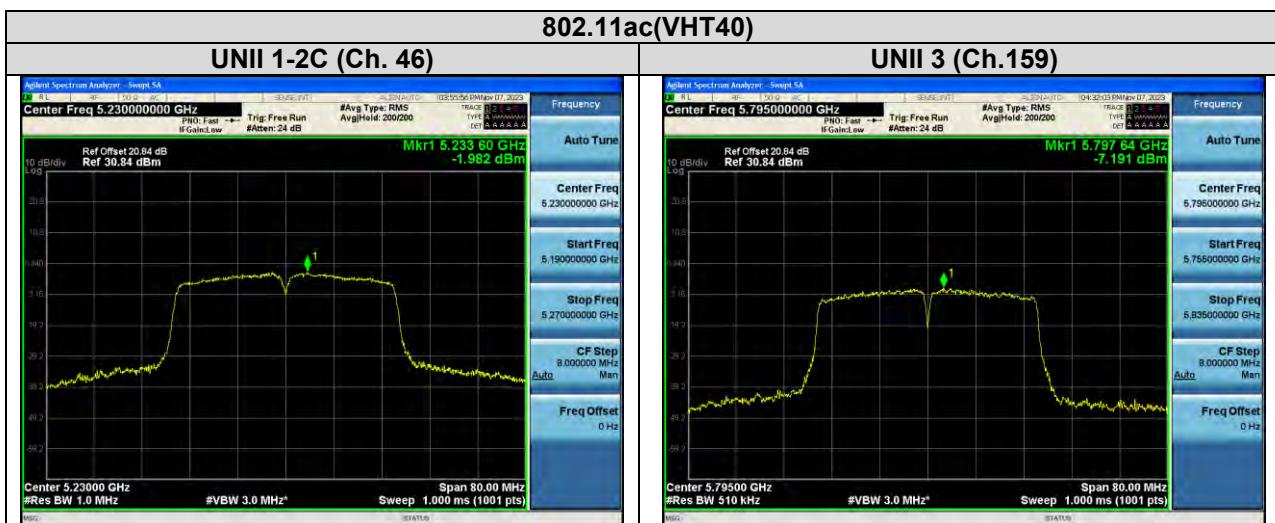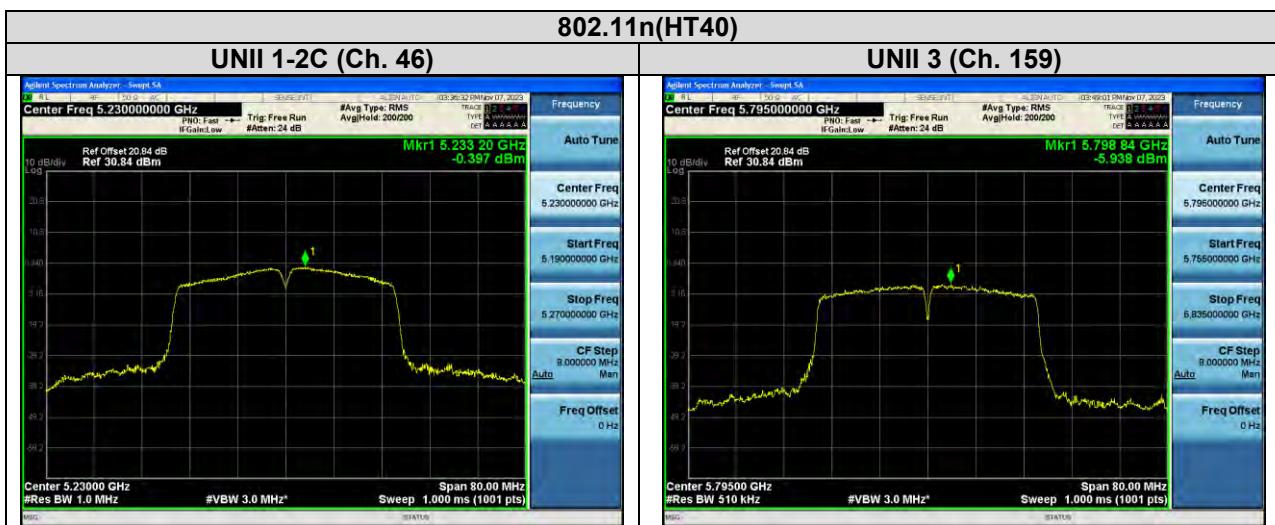

10.6 FREQUENCY STABILITY.
10.6.1 80 MHz BW
Startup after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210030.40	30.40
100%		-30	5210006.97	6.97
100%		-20	5210015.81	15.81
100%		-10	5210017.31	17.31
100%		0	5210025.28	25.28
100%		+10	5210028.43	28.43
100%		+30	5210036.52	36.52
100%		+40	5210046.99	46.99
100%		+50	5210053.78	53.78
High	4.40	+20	5210030.79	30.79
Low	3.70	+20	5210030.30	30.30

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5290035.44	35.44
100%		-30	5290007.23	7.23
100%		-20	5290010.63	10.63
100%		-10	5290018.36	18.36
100%		0	5290025.73	25.73
100%		+10	5290028.35	28.35
100%		+30	5290035.55	35.55
100%		+40	5290048.97	48.97
100%		+50	5290056.78	56.78
High	4.40	+20	5290031.62	31.62
Low	3.70	+20	5290034.04	34.04

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5530031.84	31.84
100%		-30	5530010.86	10.86
100%		-20	5530012.99	12.99
100%		-10	5530017.12	17.12
100%		0	5530023.85	23.85
100%		+10	5530025.33	25.33
100%		+30	5530036.40	36.40
100%		+40	5530042.43	42.43
100%		+50	5530053.83	53.83
High	4.40	+20	5530035.06	35.06
Low	3.70	+20	5530030.59	30.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5775034.32	34.32
100%		-30	5775007.14	7.14
100%		-20	5775010.89	10.89
100%		-10	5775019.69	19.69
100%		0	5775025.83	25.83
100%		+10	5775027.82	27.82
100%		+30	5775035.67	35.67
100%		+40	5775048.11	48.11
100%		+50	5775060.33	60.33
High	4.40	+20	5775033.36	33.36
Low	3.70	+20	5775033.59	33.59

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

2 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210032.81	32.81
100%		-30	5210006.25	6.25
100%		-20	5210013.63	13.63
100%		-10	5210019.94	19.94
100%		0	5210022.34	22.34
100%		+10	5210027.33	27.33
100%		+30	5210037.59	37.59
100%		+40	5210044.07	44.07
100%		+50	5210053.34	53.34
High	4.40	+20	5210032.28	32.28
Low	3.70	+20	5210035.49	35.49

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5290032.39	32.39
100%		-30	5290008.85	8.85
100%		-20	5290010.71	10.71
100%		-10	5290018.26	18.26
100%		0	5290020.29	20.29
100%		+10	5290030.99	30.99
100%		+30	5290037.08	37.08
100%		+40	5290050.61	50.61
100%		+50	5290056.41	56.41
High	4.40	+20	5290035.54	35.54
Low	3.70	+20	5290035.57	35.57

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5530034.54	34.54
100%		-30	5530009.74	9.74
100%		-20	5530014.78	14.78
100%		-10	5530018.27	18.27
100%		0	5530021.64	21.64
100%		+10	5530027.06	27.06
100%		+30	5530038.94	38.94
100%		+40	5530047.48	47.48
100%		+50	5530054.35	54.35
High	4.40	+20	5530031.34	31.34
Low	3.70	+20	5530032.98	32.98

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5775031.80	31.80
100%		-30	5775010.78	10.78
100%		-20	5775014.86	14.86
100%		-10	5775016.37	16.37
100%		0	5775024.51	24.51
100%		+10	5775028.18	28.18
100%		+30	5775036.95	36.95
100%		+40	5775041.32	41.32
100%		+50	5775058.51	58.51
High	4.40	+20	5775030.19	30.19
Low	3.70	+20	5775031.94	31.94

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

5 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210035.97	35.97
100%		-30	5210007.79	7.79
100%		-20	5210014.57	14.57
100%		-10	5210017.39	17.39
100%		0	5210025.89	25.89
100%		+10	5210026.37	26.37
100%		+30	5210037.74	37.74
100%		+40	5210049.68	49.68
100%		+50	5210059.36	59.36
High	4.40	+20	5210030.62	30.62
Low	3.70	+20	5210032.22	32.22

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5290033.41	33.41
100%		-30	5290010.14	10.14
100%		-20	5290010.34	10.34
100%		-10	5290018.37	18.37
100%		0	5290020.80	20.80
100%		+10	5290028.41	28.41
100%		+30	5290035.13	35.13
100%		+40	5290047.42	47.42
100%		+50	5290060.14	60.14
High	4.40	+20	5290031.98	31.98
Low	3.70	+20	5290031.64	31.64

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5530031.04	31.04
100%		-30	5530010.36	10.36
100%		-20	5530011.72	11.72
100%		-10	5530017.82	17.82
100%		0	5530025.28	25.28
100%		+10	5530026.33	26.33
100%		+30	5530038.36	38.36
100%		+40	5530050.48	50.48
100%		+50	5530054.49	54.49
High	4.40	+20	5530034.11	34.11
Low	3.70	+20	5530033.67	33.67

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5775034.90	34.90
100%		-30	5775007.34	7.34
100%		-20	5775010.63	10.63
100%		-10	5775020.43	20.43
100%		0	5775022.11	22.11
100%		+10	5775026.93	26.93
100%		+30	5775037.68	37.68
100%		+40	5775049.89	49.89
100%		+50	5775060.75	60.75
High	4.40	+20	5775030.51	30.51
Low	3.70	+20	5775034.22	34.22

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10 minutes after the EUT is energized

OPERATING BAND:	UNII Band 1
OPERATING FREQUENCY:	5,210,000,000 Hz
CHANNEL:	42
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5210033.21	33.21
100%		-30	5210010.23	10.23
100%		-20	5210013.55	13.55
100%		-10	5210016.80	16.80
100%		0	5210023.04	23.04
100%		+10	5210027.06	27.06
100%		+30	5210036.14	36.14
100%		+40	5210041.95	41.95
100%		+50	5210050.43	50.43
High	4.40	+20	5210033.97	33.97
Low	3.70	+20	5210030.14	30.14

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2A
OPERATING FREQUENCY:	5,290,000,000 Hz
CHANNEL:	58
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5290032.49	32.49
100%		-30	5290007.60	7.60
100%		-20	5290015.76	15.76
100%		-10	5290015.30	15.30
100%		0	5290021.95	21.95
100%		+10	5290027.63	27.63
100%		+30	5290037.56	37.56
100%		+40	5290048.39	48.39
100%		+50	5290050.51	50.51
High	4.40	+20	5290034.12	34.12
Low	3.70	+20	5290034.97	34.97

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 2C
OPERATING FREQUENCY:	5,530,000,000 Hz
CHANNEL:	106
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5530035.62	35.62
100%		-30	5530009.23	9.23
100%		-20	5530014.49	14.49
100%		-10	5530016.58	16.58
100%		0	5530024.92	24.92
100%		+10	5530030.75	30.75
100%		+30	5530038.69	38.69
100%		+40	5530043.29	43.29
100%		+50	5530054.98	54.98
High	4.40	+20	5530034.85	34.85
Low	3.70	+20	5530034.45	34.45

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

OPERATING BAND:	UNII Band 3
OPERATING FREQUENCY:	5,775,000,000 Hz
CHANNEL:	155
REFERENCE VOLTAGE:	3.85 VDC

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (kHz)	Frequency Error (kHz)
100%	3.85	+20(Ref)	5775030.31	30.31
100%		-30	5775007.48	7.48
100%		-20	5775015.37	15.37
100%		-10	5775016.34	16.34
100%		0	5775021.50	21.50
100%		+10	5775025.40	25.40
100%		+30	5775038.18	38.18
100%		+40	5775043.44	43.44
100%		+50	5775051.08	51.08
High	4.40	+20	5775032.91	32.91
Low	3.70	+20	5775030.09	30.09

Note:

Based on the results of the frequency stability test shown above the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency error noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

10.7 STRADDLE CHANNEL

10.7.1 26 dB Bandwidth

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11a	UNII 2C	5720	144	5710.24	14.76
802.11n(HT20)				5710.12	14.88
802.11ac(VHT20)				5710.04	14.96
802.11a	UNII 3	5720	144	5729.76	4.76
802.11n(HT20)				5729.80	4.80
802.11ac(VHT20)				5729.92	4.92

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11n(HT40)	UNII 2C	5710	142	5689.92	35.08
802.11ac(VHT40)				5690.00	35.00
802.11n(HT40)	UNII 3	5710	142	5730.32	5.32
802.11ac(VHT40)				5730.00	5.00

Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	26 dB Bandwidth [MHz]
802.11ac(VHT80)	UNII 2C	5690	138	5649.36	75.64
	UNII 3	5690	138	5730.96	5.96

Note:

[UNII 2C] 26 dB Bandwidth = 5 725 MHz - Measured Frequency[MHz]

[UNII 3C] 26 dB Bandwidth = Measured Frequency[MHz] – 5 725 MHz

□ Test Plots (26 dB Bandwidth)

802.11a UNII Band



802.11n(HT20) UNII Band



802.11ac(VHT20) UNII Band




802.11n(HT40) UNII Band



802.11ac(VHT40) UNII Band



802.11ac(VHT80) UNII Band

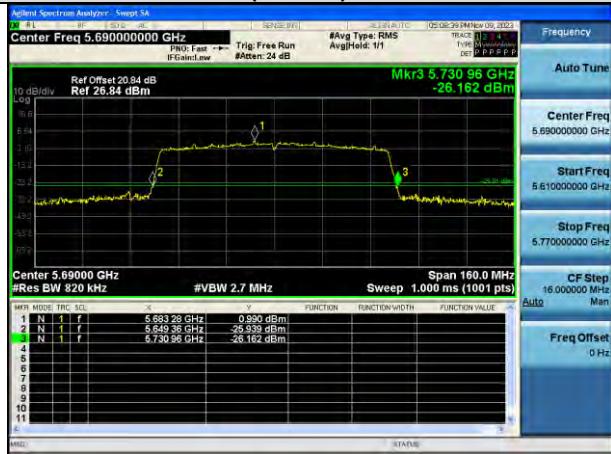

10.7.2 6 dB Bandwidth


Mode	Band	Frequency [MHz]	Channel	Measured Frequency [MHz]	6 dB Bandwidth [MHz]	Limit [MHz]
802.11a	UNII 3	5720	144	5727.60	2.60	> 0.5
802.11n(HT20)				5727.60	2.60	> 0.5
802.11ac(VHT20)				5727.60	2.60	> 0.5
802.11n(HT40)	UNII 3	5710	142	5727.60	2.60	> 0.5
802.11ac(VHT40)				5727.60	2.60	> 0.5
802.11ac(VHT80)	UNII 3	5690	138	5727.76	2.76	> 0.5

Note:


6 dB Bandwidth = Measured Frequency[MHz] – 5725MHz

□ Test Plots(Band 6 dB Bandwidth)

802.11a UNII Band

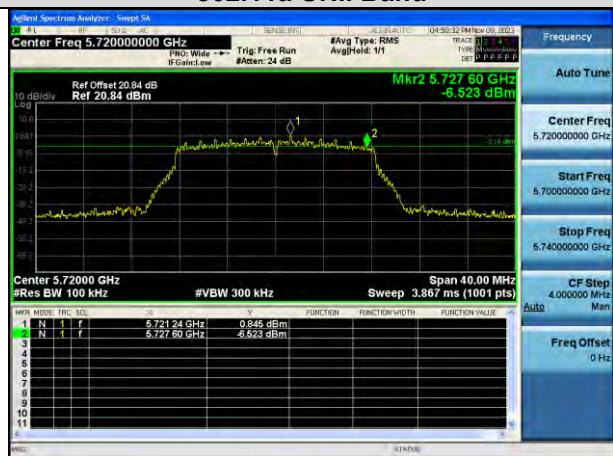


802.11n(HT20) UNII Band

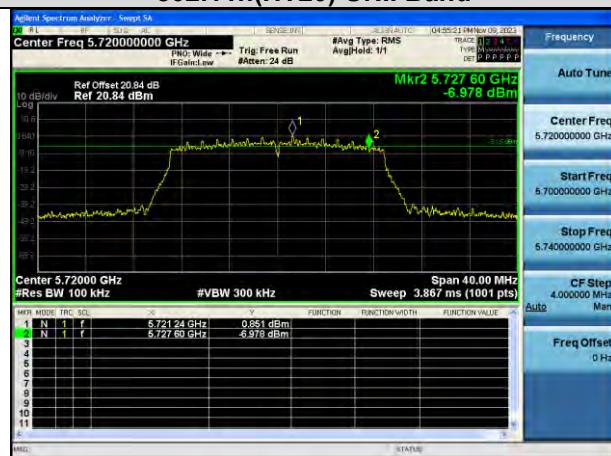


802.11ac(VHT20) UNII Band



802.11n(HT40) UNII Band

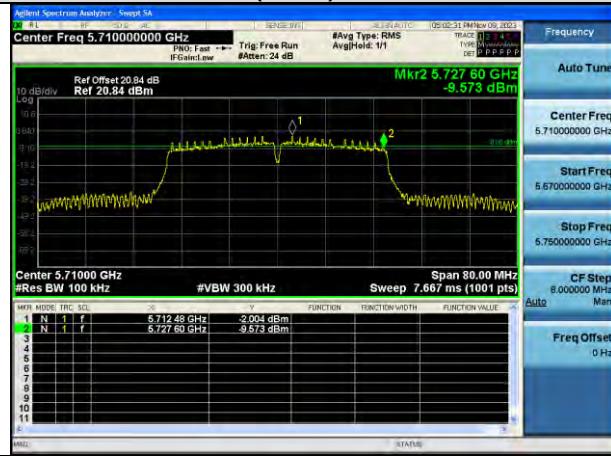

802.11ac(VHT40) UNII Band

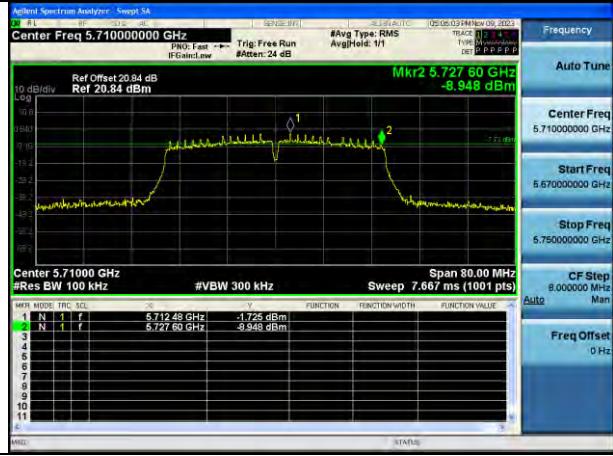

802.11ac(VHT80) UNII Band



10.7.3 Output Power


Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720 (UNII 2C Band)	144	6.51	3.260	9.77	22.69	48 Mbps
802.11n(HT20)			7.42	2.119	9.54	22.73	MCS4
802.11ac(VHT20)			7.50	2.085	9.59	22.75	MCS4
802.11a	5720 (UNII 3 Band)	144	-1.11	3.260	2.15	30.00	48 Mbps
802.11n(HT20)			0.34	2.119	2.46	30.00	MCS4
802.11ac(VHT20)			0.59	2.085	2.67	30.00	MCS4

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710 (UNII 2C Band)	142	10.25	0.279	10.53	23.98	MCS0
802.11ac(VHT40)			10.23	0.278	10.50	23.98	MCS0
802.11n(HT40)	5710 (UNII 3 Band)	142	-1.94	0.279	-1.66	30.00	MCS0
802.11ac(VHT40)			-1.89	0.278	-1.61	30.00	MCS0

Mode	Frequency [MHz]	Channel	Measured Power [dBm]	Duty Cycle Factor [dB]	Total Power [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C Band)	138	8.84	1.057	9.89	23.98	MCS0
	5690 (UNII 3 Band)	138	-6.33	1.057	-5.28	30.00	MCS0

□ Test Plots


802.11a UNII 2C Band

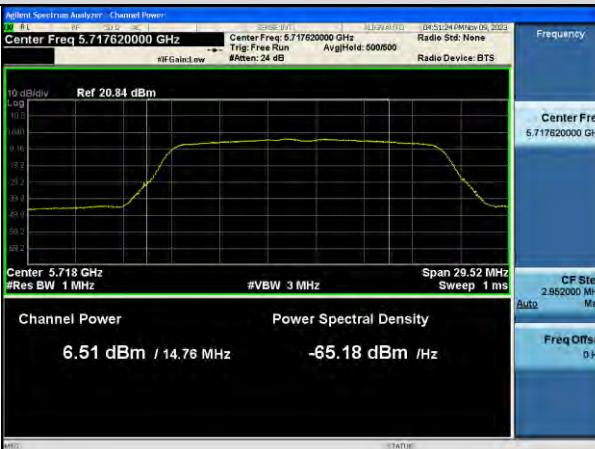


802.11a UNII 3 Band




802.11n(HT20) UNII 2C Band

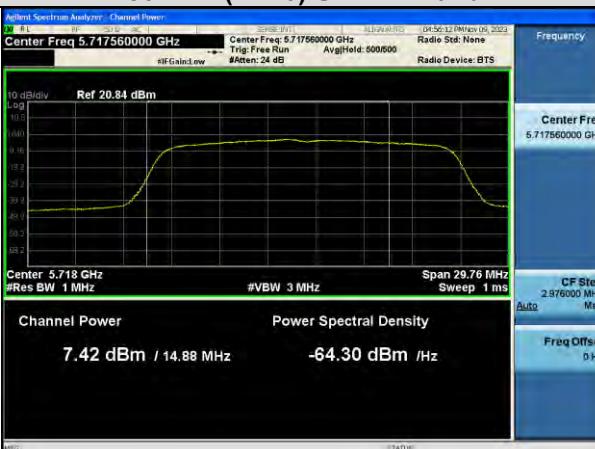


802.11n(HT20) UNII 3 Band

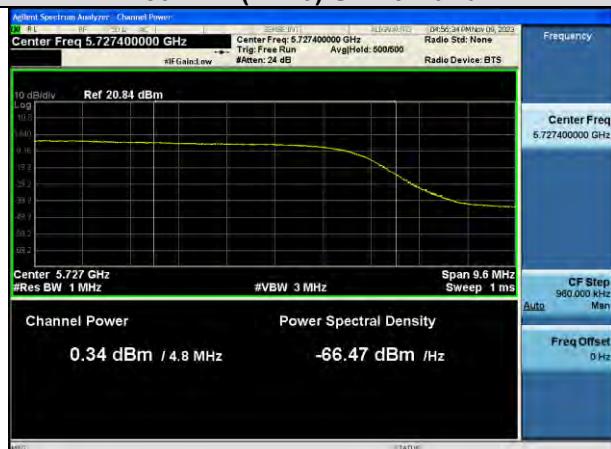


802.11ac(VHT20) UNII 2C Band

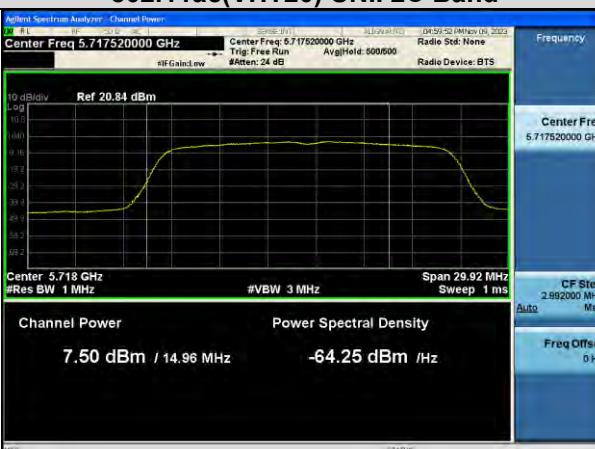


802.11ac(VHT20) UNII 3 Band

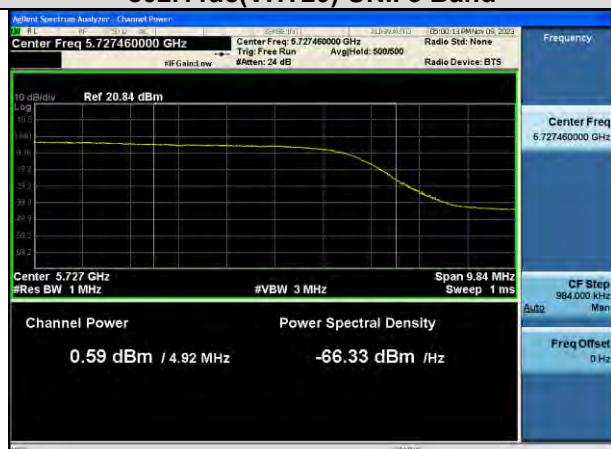


802.11n(HT40) UNII 2C Band

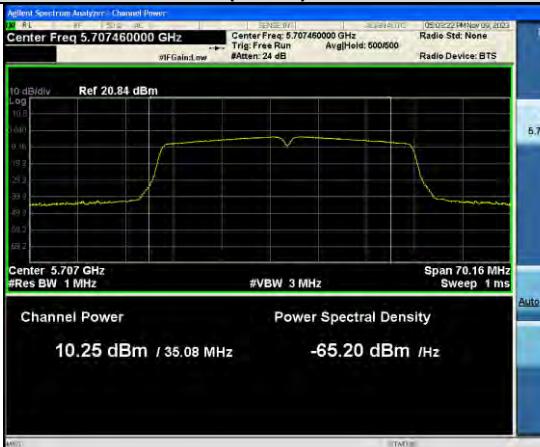

802.11n(HT40) UNII 3 Band

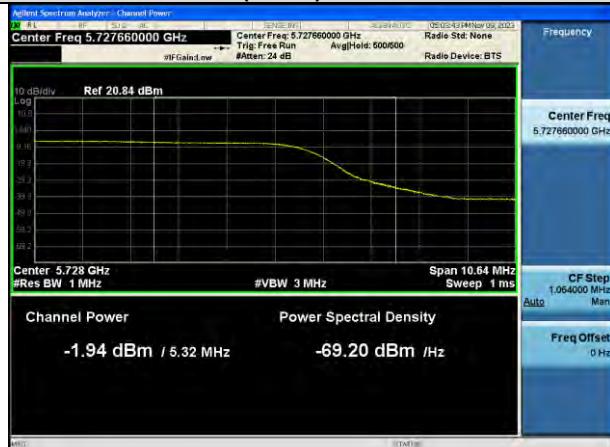


802.11ac(VHT40) UNII 2C Band

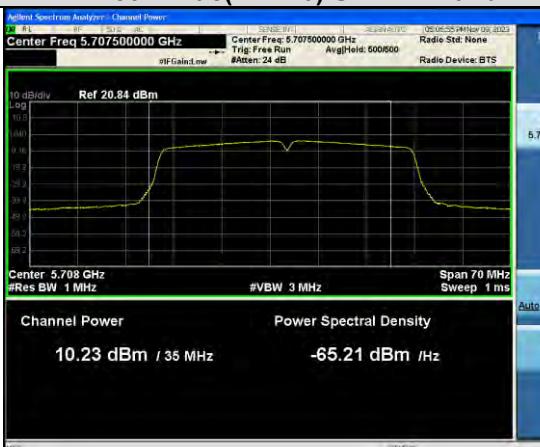

802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band

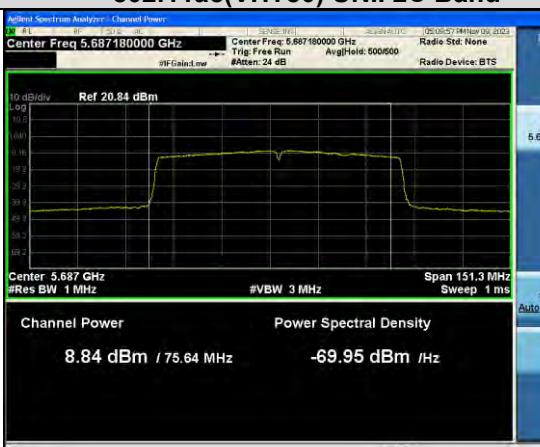

802.11ac(VHT80) UNII 3 Band




10.7.4 Power Spectral Density

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11a	5720 (UNII 2C)	144	-2.693	3.260	0.567	11 dBm/MHz	48 Mbps
802.11n(HT20)			-1.722	2.119	0.397		MCS4
802.11ac(VHT20)			-1.862	2.085	0.222		MCS4
802.11a	5720 (UNII 3)	144	-7.107	3.260	-3.847	30 dBm /500 kHz	48 Mbps
802.11n(HT20)			-6.702	2.119	-4.583		MCS4
802.11ac(VHT20)			-7.160	2.085	-5.075		MCS4

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11n(HT40)	5710 (UNII 2C)	142	-2.868	0.279	-2.589	11 dBm/MHz	MCS0
802.11ac(VHT40)			-2.814	0.278	-2.536		MCS0
802.11n(HT40)	5710 (UNII 3)	142	-9.337	0.279	-2.589	30 dBm /500 kHz	MCS0
802.11ac(VHT40)			-9.294	0.278	-2.536		MCS0

Mode	Frequency [MHz]	Channel	Measured Density [dBm]	Duty Cycle Factor [dB]	Total PSD [dBm]	Limit [dBm]	Worstcase Datarate
802.11ac(VHT80)	5690 (UNII 2C)	138	-7.603	1.057	-6.546	11 dBm/MHz	MCS0
	5690 (UNII 3)	138	-14.539	1.057	-13.482	30 dBm /500 kHz	MCS0

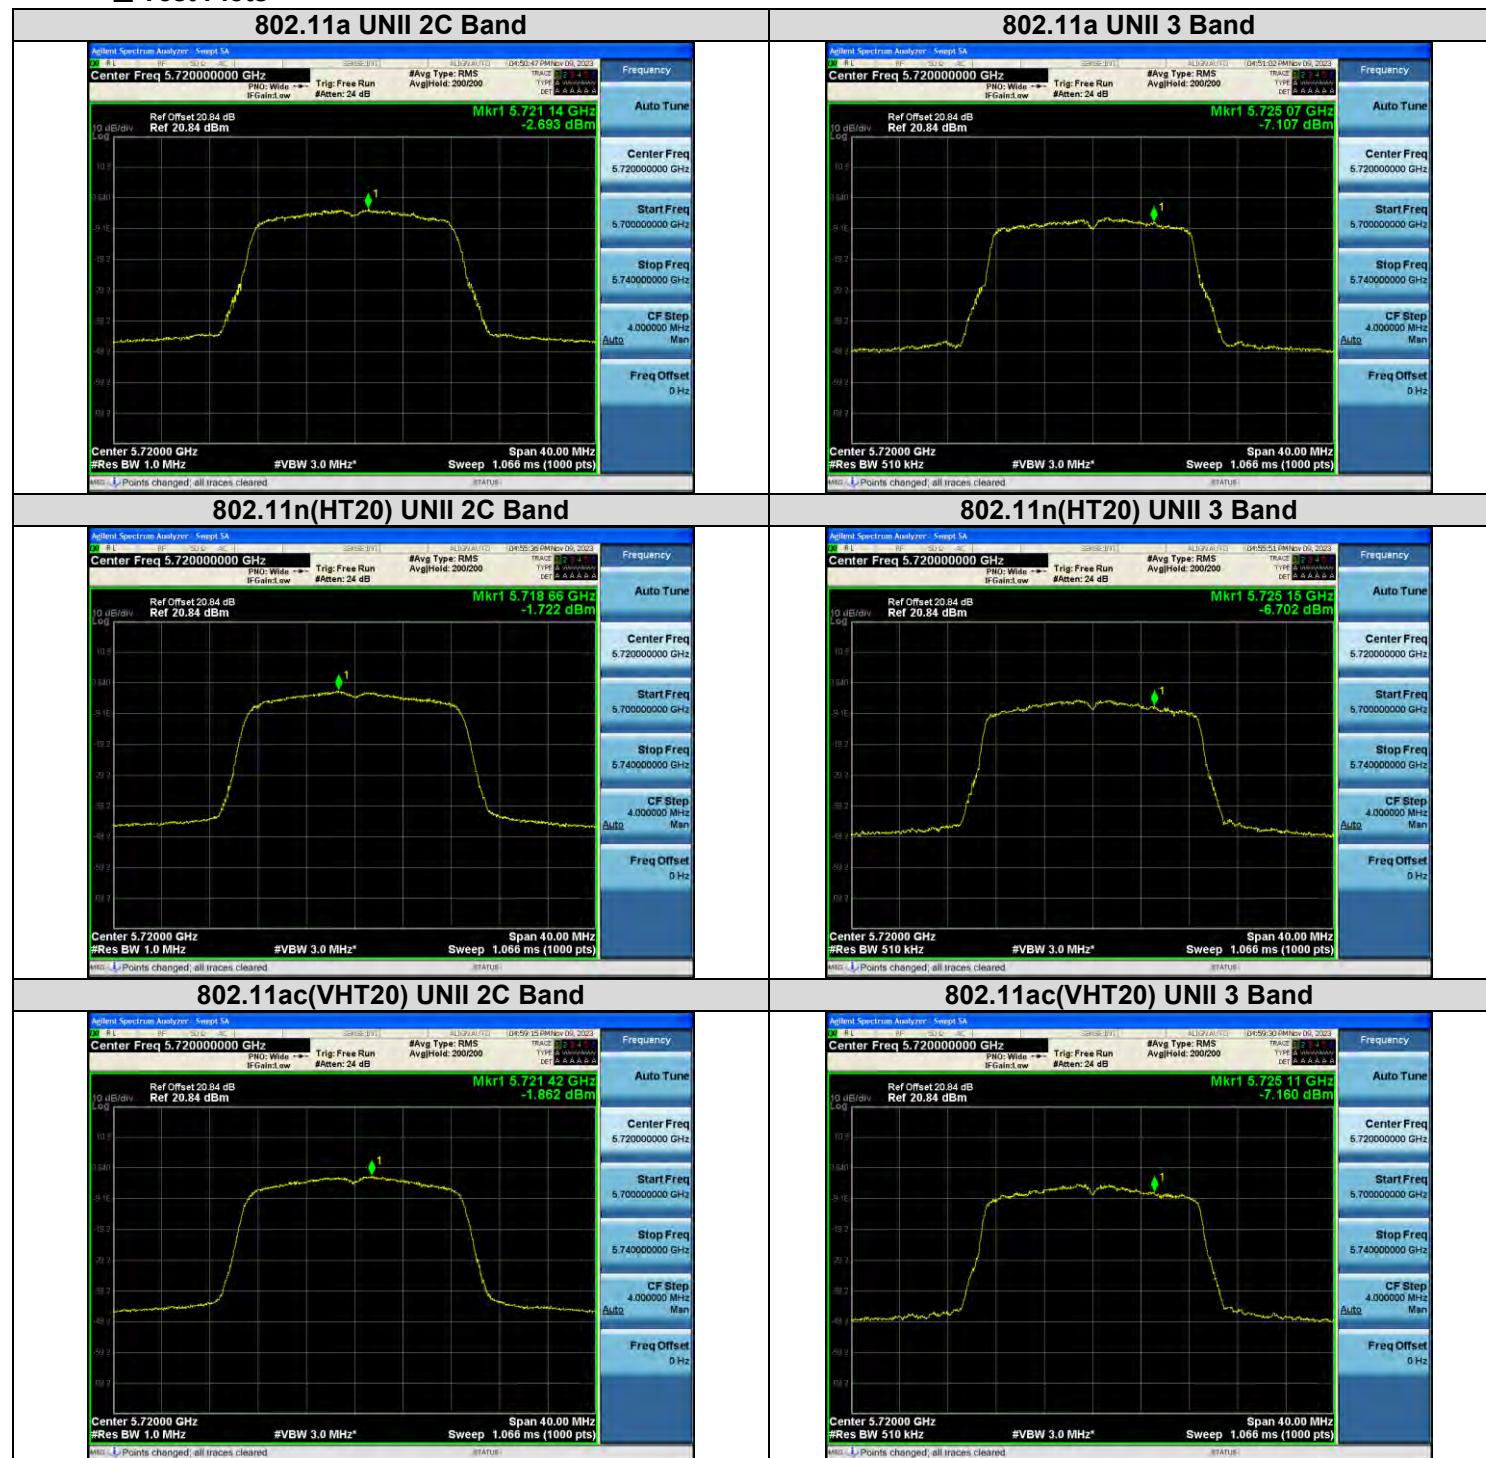Test Plots


802.11n(HT40) UNII 2C Band



802.11n(HT40) UNII 3 Band



802.11ac(VHT40) UNII 2C Band



802.11ac(VHT40) UNII 3 Band



802.11ac(VHT80) UNII 2C Band



802.11ac(VHT80) UNII 3 Band



10.8 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30 MHz

Frequency	Measured Value	A.F+D.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. The Measured Value of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dB μ V) + Distance extrapolation factor

Frequency Range : Below 1 GHz

Frequency	Measured Value	A.F+C.L	POL	Total	Limit	Margin
[MHz]	[dB μ V]	[dB/m]	[H/V]	[dB μ V/m]	[dB μ V/m]	[dB]
No Critical peaks found						

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode

Frequency Range : Above 1 GHz

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10360	44.15	7.94	V	52.09	68.20	16.11	PK
15540	43.20	13.08	V	56.28	73.98	17.70	PK
15540	29.34	13.08	V	42.42	53.98	11.56	AV
10360	43.86	7.94	H	51.80	68.20	16.40	PK
15540	42.95	13.08	H	56.03	73.98	17.95	PK
15540	29.22	13.08	H	42.30	53.98	11.68	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5200 MHz
Channel No.	40 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10400	46.35	7.89	V	54.24	68.20	13.96	PK
15600	42.87	13.09	V	55.96	73.98	18.02	PK
15600	29.15	13.09	V	42.24	53.98	11.74	AV
10400	46.12	7.89	H	54.01	68.20	14.19	PK
15600	42.55	13.09	H	55.64	73.98	18.34	PK
15600	29.02	13.09	H	42.11	53.98	11.87	AV

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5240 MHz
Channel No.	48 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10480	43.49	8.23	V	51.72	68.20	16.48	PK
15720	43.05	13.40	V	56.45	73.98	17.53	PK
15720	29.70	13.40	V	43.10	53.98	10.88	AV
10480	43.22	8.23	H	51.45	68.20	16.75	PK
15720	42.85	13.40	H	56.25	73.98	17.73	PK
15720	29.32	13.40	H	42.72	53.98	11.26	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5260 MHz
Channel No.	52 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10520	43.28	8.82	V	52.10	68.20	16.10	PK
15780	43.41	13.53	V	56.94	73.98	17.04	PK
15780	29.85	13.53	V	43.38	53.98	10.60	AV
10520	42.95	8.82	H	51.77	68.20	16.43	PK
15780	43.12	13.53	H	56.65	73.98	17.33	PK
15780	29.62	13.53	H	43.15	53.98	10.83	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5300 MHz
Channel No.	60 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10600	42.89	9.44	V	52.33	73.98	21.65	PK
10600	29.68	9.44	V	39.12	53.98	14.86	AV
15900	43.16	13.06	V	56.22	73.98	17.76	PK
15900	29.90	13.06	V	42.96	53.98	11.02	AV
10600	42.51	9.44	H	51.95	73.98	22.03	PK
10600	29.41	9.44	H	38.85	53.98	15.13	AV
15900	43.59	13.06	H	56.65	73.98	17.33	PK
15900	29.55	13.06	H	42.61	53.98	11.37	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
10640	42.86	9.48	V	52.34	73.98	21.64	PK
10640	29.49	9.48	V	38.97	53.98	15.01	AV
15960	47.07	12.65	V	59.72	73.98	14.26	PK
15960	33.05	12.65	V	45.70	53.98	8.28	AV
10640	42.69	9.48	H	52.17	73.98	21.81	PK
10640	29.33	9.48	H	38.81	53.98	15.17	AV
15960	45.22	12.65	H	57.87	73.98	16.11	PK
15960	31.59	12.65	H	44.24	53.98	9.74	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11000	42.27	9.40	V	51.67	73.98	22.31	PK
11000	28.52	9.40	V	37.92	53.98	16.06	AV
16500	45.11	11.61	V	56.72	68.20	11.48	PK
11000	42.05	9.40	H	51.45	73.98	22.53	PK
11000	28.32	9.40	H	37.72	53.98	16.26	AV
16500	45.23	11.61	H	56.84	68.20	11.36	PK

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5600 MHz
Channel No.	120 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11200	41.81	9.91	V	51.72	73.98	22.26	PK
11200	28.57	9.91	V	38.48	53.98	15.50	AV
16800	44.44	11.21	V	55.65	68.20	12.55	PK
11200	41.71	9.91	H	51.62	73.98	22.36	PK
11200	28.44	9.91	H	38.35	53.98	15.63	AV
16800	44.80	11.21	H	56.01	68.20	12.19	PK

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5720 MHz
Channel No.	144 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11440	41.02	10.51	V	51.53	73.98	22.45	PK
11440	28.12	10.51	V	38.63	53.98	15.35	AV
17160	42.95	11.74	V	54.69	68.20	13.51	PK
11440	41.22	10.51	H	51.73	73.98	22.25	PK
11440	28.23	10.51	H	38.74	53.98	15.24	AV
17160	43.12	11.74	H	54.86	68.20	13.34	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5745MHz
Channel No.	149 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11490	42.24	10.26	V	52.50	73.98	21.48	PK
11490	28.74	10.26	V	39.00	53.98	14.98	AV
17235	42.81	12.32	V	55.13	68.20	13.07	PK
11490	42.02	10.26	H	52.28	73.98	21.70	PK
11490	28.62	10.26	H	38.88	53.98	15.10	AV
17235	42.92	12.32	H	55.24	68.20	12.96	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5785 MHz
Channel No.	157 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11570	42.01	9.44	V	51.45	73.98	22.53	PK
11570	28.71	9.44	V	38.15	53.98	15.83	AV
17355	42.89	12.88	V	55.77	68.20	12.43	PK
11570	42.22	9.44	H	51.66	73.98	22.32	PK
11570	28.88	9.44	H	38.32	53.98	15.66	AV
17355	42.62	12.88	H	55.50	68.20	12.70	PK

Band :	UNII 3
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5825 MHz
Channel No.	165 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
11650	41.22	9.43	V	50.65	73.98	23.33	PK
11650	29.02	9.43	V	38.45	53.98	15.53	AV
17475	41.55	13.82	V	55.37	68.20	12.83	PK
11650	42.46	9.43	H	51.89	73.98	22.09	PK
11650	29.12	9.43	H	38.55	53.98	15.43	AV
17475	41.69	13.82	H	55.51	68.20	12.69	PK

[RSDB Mode]**Bluetooth_Ch. 39_DH5_GFSK + WLAN_5 GHz_802.11a_6 Mbps_Ch.64**


Frequency [MHz]	Measured Value [dBμV]	C.L+A.F+ D.F-A.G [dB]	POL [H/V]	Total [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Measurement Type
10640	42.62	9.48	V	52.10	73.98	21.88	PK
10640	29.51	9.48	V	38.99	53.98	14.99	AV
15960	46.12	12.65	V	58.77	73.98	15.21	PK
15960	32.75	12.65	V	45.40	53.98	8.58	AV
10640	42.41	9.48	H	51.89	73.98	22.09	PK
10640	29.32	9.48	H	38.80	53.98	15.18	AV
15960	46.29	12.65	H	58.94	73.98	15.04	PK
15960	32.77	12.65	H	45.42	53.98	8.56	AV

Note :


Bluetooth RSDB Data refer to [BT] Test Report.

□ Test Plots

Average Result (802.11a, Ch.64 3rd Spurious Emissions, X-V)

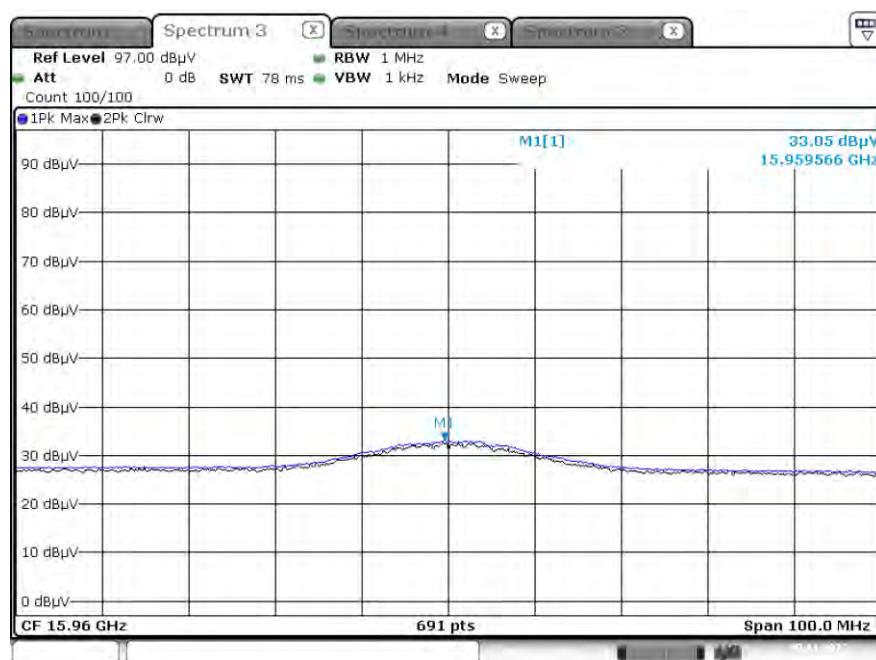


Peak Result (802.11a, Ch.64 3rd Spurious Emissions, X-V)

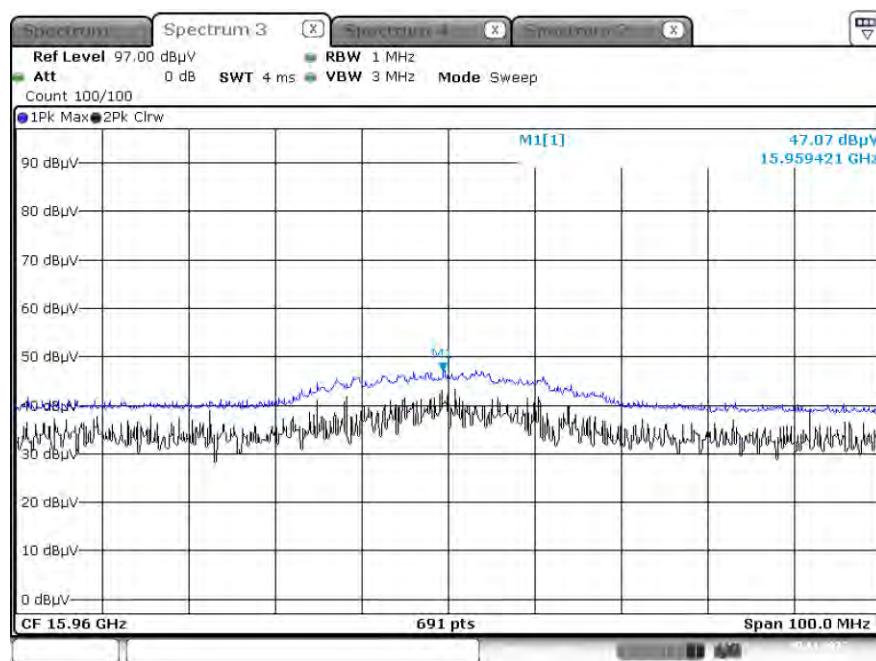


[RSDB Mode]

Bluetooth_Ch. 39_DH5_GFSK + WLAN_5 GHz_802.11a_6 Mbps_Ch.64

Average Result (3rd Spurious Emissions, Z-H)

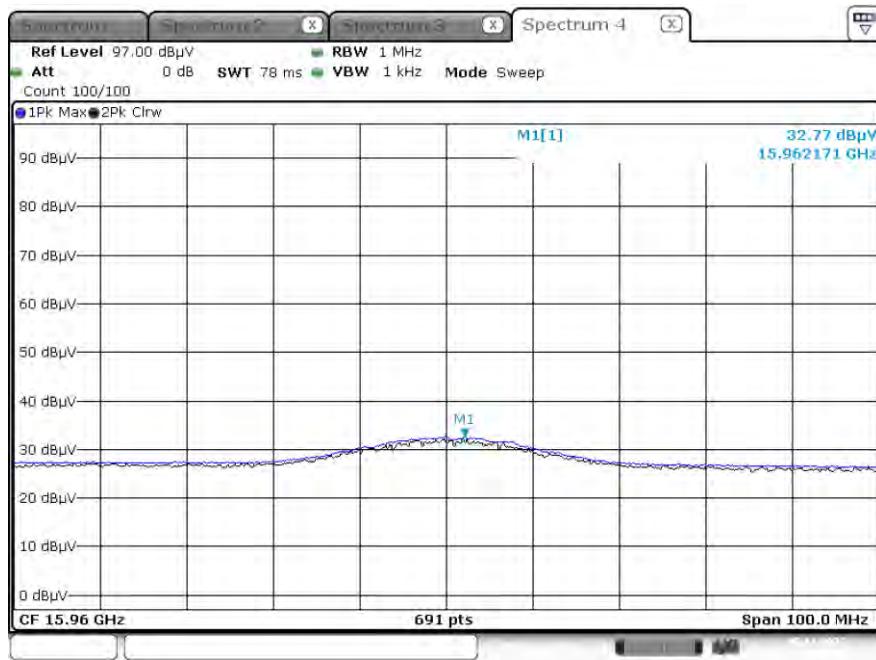

Peak Result (3rd Spurious Emissions, Z-H)

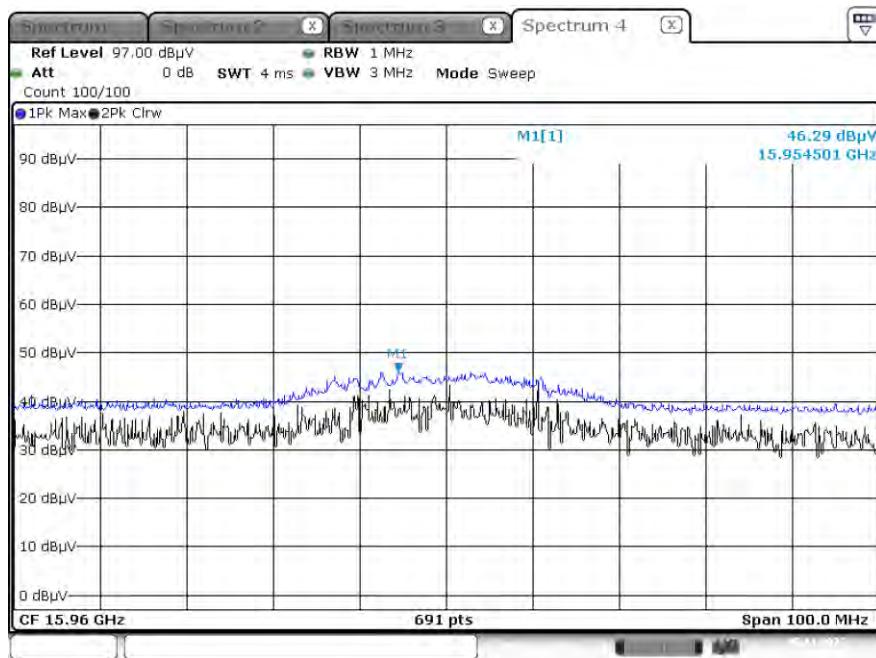

Note:

Only the worst case plots for Radiated Spurious Emissions.

10.9 RADIATED RESTRICTED BAND EDGE

Band :	UNII 1
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	57.23	8.70	H	65.93	73.98	8.05	PK
5150	41.34	8.70	H	50.04	53.98	3.94	AV
5150	56.85	8.70	V	65.55	73.98	8.43	PK
5150	40.95	8.70	V	49.65	53.98	4.33	AV

Band :	UNII 2A
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	57.48	8.50	H	65.98	73.98	8.00	PK
5350	39.08	8.50	H	47.58	53.98	6.40	AV
5350	57.02	8.50	V	65.52	73.98	8.46	PK
5350	38.85	8.50	V	47.35	53.98	6.63	AV

Band :	UNII 2C
Operation Mode:	802.11 a
Transfer Rate:	6 Mbps
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	55.32	9.03	H	64.35	73.98	9.63	PK
5460	36.12	9.03	H	45.15	53.98	8.83	AV
# 5470	55.35	9.03	H	64.38	68.20	3.82	PK
5460	54.85	9.03	V	63.88	73.98	10.10	PK
5460	36.02	9.03	V	45.05	53.98	8.93	AV
# 5470	54.89	9.03	V	63.92	68.20	4.28	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 n _HT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	59.86	8.70	H	68.56	73.98	5.42	PK
5150	41.55	8.70	H	50.25	53.98	3.73	AV
5150	58.52	8.70	V	67.22	73.98	6.76	PK
5150	41.01	8.70	V	49.71	53.98	4.27	AV

Band :	UNII 2A
Operation Mode:	802.11 n _HT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	58.99	8.50	H	67.49	73.98	6.49	PK
5350	39.51	8.50	H	48.01	53.98	5.97	AV
5350	58.51	8.50	V	67.01	73.98	6.97	PK
5350	38.95	8.50	V	47.45	53.98	6.53	AV

Band :	UNII 2C
Operation Mode:	802.11 n _HT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	55.81	9.03	H	64.84	73.98	9.14	PK
5460	36.45	9.03	H	45.48	53.98	8.50	AV
# 5470	55.20	9.03	H	64.23	68.20	3.97	PK
5460	55.55	9.03	V	64.58	73.98	9.40	PK
5460	36.22	9.03	V	45.25	53.98	8.73	AV
# 5470	54.89	9.03	V	63.92	68.20	4.28	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5180 MHz
Channel No.	36 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	59.55	8.70	H	68.25	73.98	5.73	PK
5150	41.44	8.70	H	50.14	53.98	3.84	AV
5150	59.32	8.70	V	68.02	73.98	5.96	PK
5150	41.02	8.70	V	49.72	53.98	4.26	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5320 MHz
Channel No.	64 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	58.81	8.50	H	67.31	73.98	6.67	PK
5350	39.49	8.50	H	47.99	53.98	5.99	AV
5350	58.51	8.50	V	67.01	73.98	6.97	PK
5350	39.21	8.50	V	47.71	53.98	6.27	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT20
Transfer MCS Index:	0
Operating Frequency	5500 MHz
Channel No.	100 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	55.18	9.03	H	64.21	73.98	9.77	PK
5460	36.21	9.03	H	45.24	53.98	8.74	AV
# 5470	55.16	9.03	H	64.19	68.20	4.01	PK
5460	54.89	9.03	V	63.92	73.98	10.06	PK
5460	35.89	9.03	V	44.92	53.98	9.06	AV
# 5470	54.89	9.03	V	63.92	68.20	4.28	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 n _HT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	60.17	8.70	H	68.87	73.98	5.11	PK
5150	40.82	8.70	H	49.52	53.98	4.46	AV
5150	60.02	8.70	V	68.72	73.98	5.26	PK
5150	40.55	8.70	V	49.25	53.98	4.73	AV

Band :	UNII 2A
Operation Mode:	802.11 n _HT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	60.36	8.50	H	68.86	73.98	5.12	PK
5350	42.33	8.50	H	50.83	53.98	3.15	AV
5350	60.02	8.50	V	68.52	73.98	5.46	PK
5350	41.98	8.50	V	50.48	53.98	3.50	AV

Band :	UNII 2C
Operation Mode:	802.11 n_HT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	54.35	9.03	H	63.38	73.98	10.60	PK
5460	35.56	9.03	H	44.59	53.98	9.39	AV
# 5470	54.58	9.03	H	63.61	68.20	4.59	PK
5460	54.05	9.03	V	63.08	73.98	10.90	PK
5460	35.25	9.03	V	44.28	53.98	9.70	AV
# 5470	54.11	9.03	V	63.14	68.20	5.06	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5190 MHz
Channel No.	38 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	58.55	8.70	H	67.25	73.98	6.73	PK
5150	40.86	8.70	H	49.56	53.98	4.42	AV
5150	58.22	8.70	V	66.92	73.98	7.06	PK
5150	40.62	8.70	V	49.32	53.98	4.66	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5310 MHz
Channel No.	62 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	60.89	8.50	H	69.39	73.98	4.59	PK
5350	42.44	8.50	H	50.94	53.98	3.04	AV
5350	60.62	8.50	V	69.12	73.98	4.86	PK
5350	42.11	8.50	V	50.61	53.98	3.37	AV

Band :	UNII 2C
Operation Mode:	802.11 ac_VHT40
Transfer MCS Index:	0
Operating Frequency	5510 MHz
Channel No.	102 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	50.49	9.03	H	59.52	73.98	14.46	PK
5460	35.23	9.03	H	44.26	53.98	9.72	AV
# 5470	54.29	9.03	H	63.32	68.20	4.88	PK
5460	50.12	9.03	V	59.15	73.98	14.83	PK
5460	35.02	9.03	V	44.05	53.98	9.93	AV
# 5470	53.95	9.03	V	62.98	68.20	5.22	PK

Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Band :	UNII 1
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5210 MHz
Channel No.	42 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5150	57.05	8.70	H	65.75	73.98	8.23	PK
5150	42.05	8.70	H	50.75	53.98	3.23	AV
5150	56.89	8.70	V	65.59	73.98	8.39	PK
5150	41.85	8.70	V	50.55	53.98	3.43	AV

Band :	UNII 2A
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5290 MHz
Channel No.	58 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F- A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5350	56.69	8.50	H	65.19	73.98	8.79	PK
5350	42.29	8.50	H	50.79	53.98	3.19	AV
5350	56.42	8.50	V	64.92	73.98	9.06	PK
5350	42.01	8.50	V	50.51	53.98	3.47	AV


Band :	UNII 2C
Operation Mode:	802.11 ac_VHT80
Transfer MCS Index:	0
Operating Frequency	5530 MHz
Channel No.	106 Ch

Frequency [MHz]	Measured Value [dB μ V]	C.L+A.F+D.F-A.G+ATT [dB]	ANT. POL [H/V]	Total [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Measurement Type
5460	52.74	9.03	H	61.77	73.98	12.21	PK
5460	40.54	9.03	H	49.57	53.98	4.41	AV
# 5470	53.15	9.03	H	62.18	68.20	6.02	PK
5460	52.32	9.03	V	61.35	73.98	12.63	PK
5460	40.12	9.03	V	49.15	53.98	4.83	AV
# 5470	52.85	9.03	V	61.88	68.20	6.32	PK


Note : # Integration method Used (KDB 789033 D02 v02r01 Section 3) d) (ii)

Test Plots(UNII 1, 2A, 2C)

Average Result_(802.11 ac_VHT40, MCS0, Ch.62, Y-H)

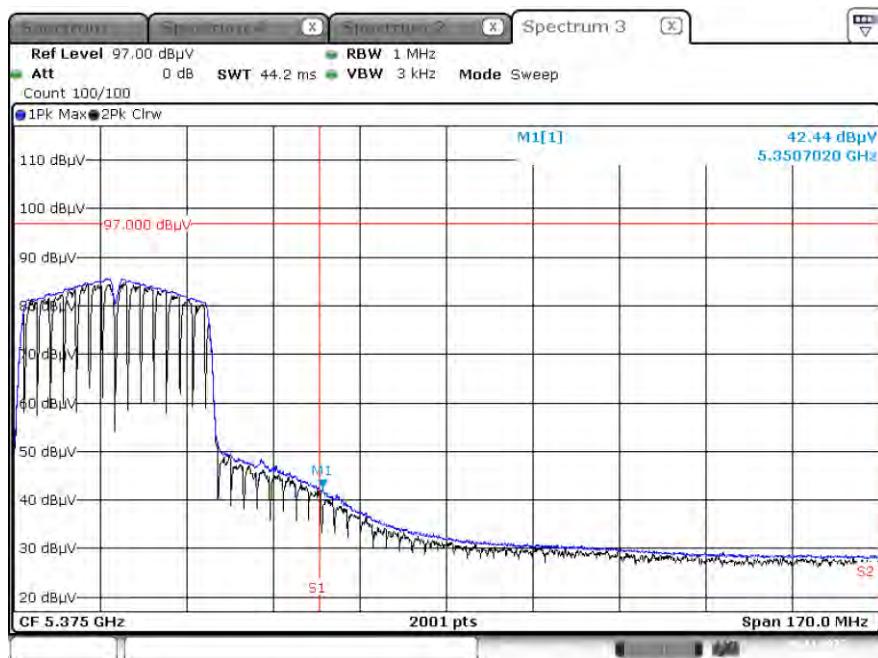

Peak Result (802.11 ac_VHT40, MCS0, Ch.62, Y-H)

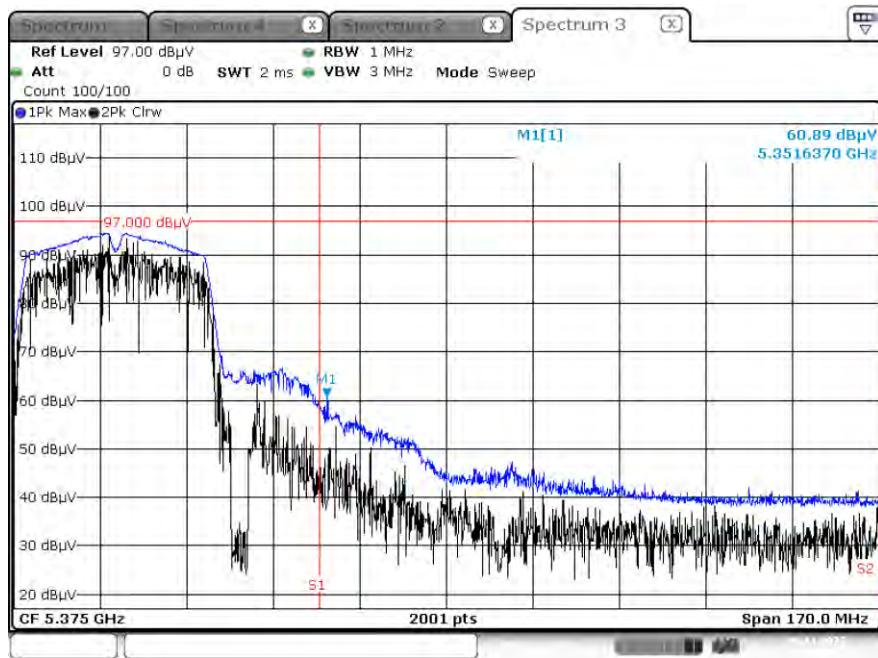


Note:


Only the worst case plots for Radiated Restricted Band Edge.

□ Test Plots(Straddle Channel)


Peak Result (802.11a, Ch.144, Y-H)

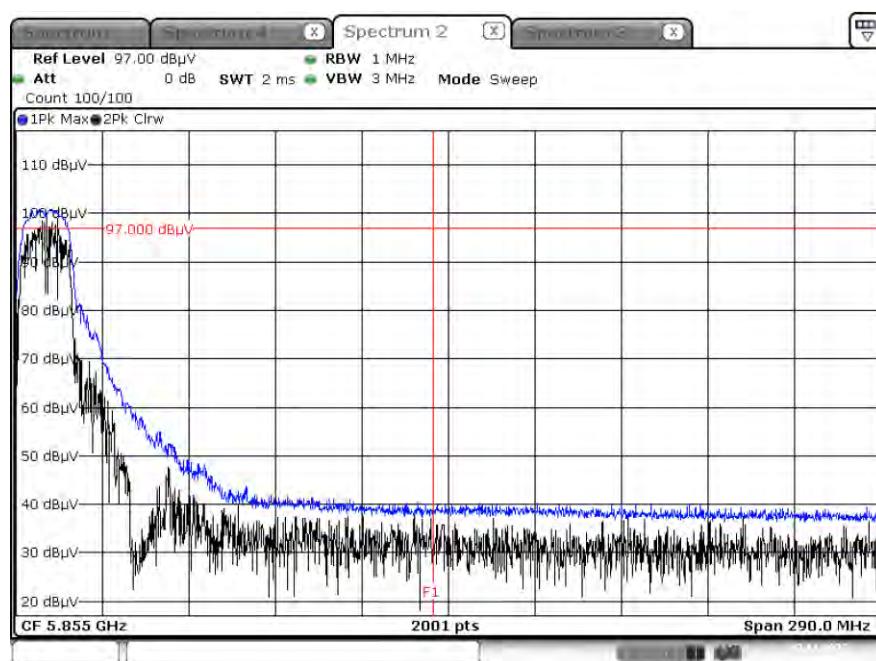


Peak Result (802.11n_HT20, Ch.144, Y-H)

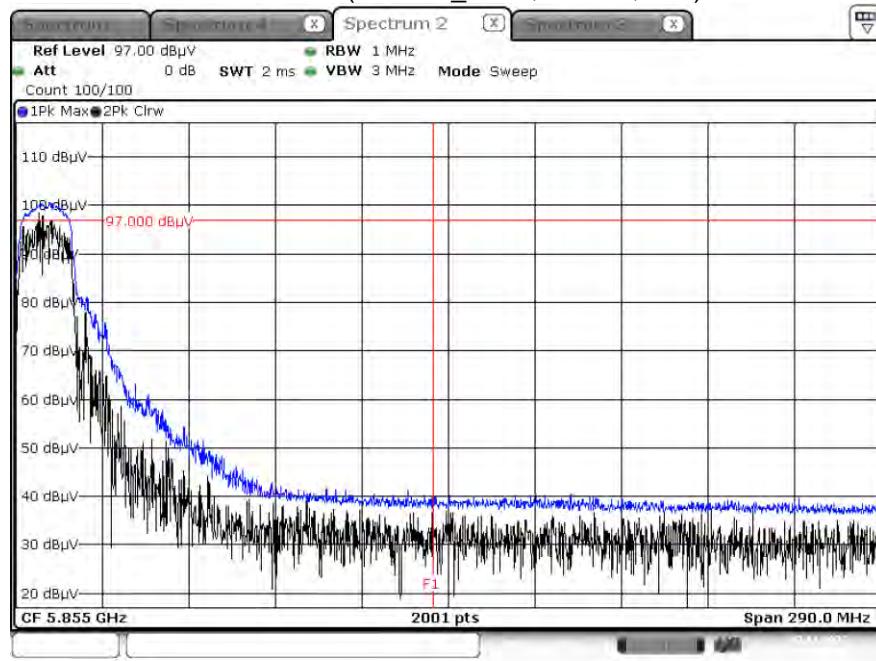


Peak Result (802.11ac_VHT20, Ch.144, Y-H)

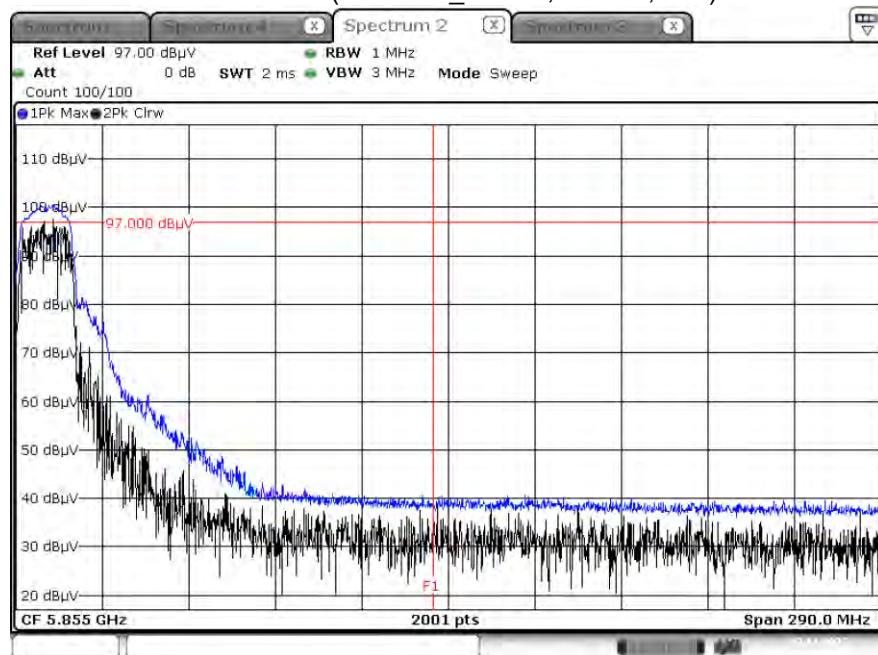


Peak Result (802.11n_HT40, Ch.142, Y-H)

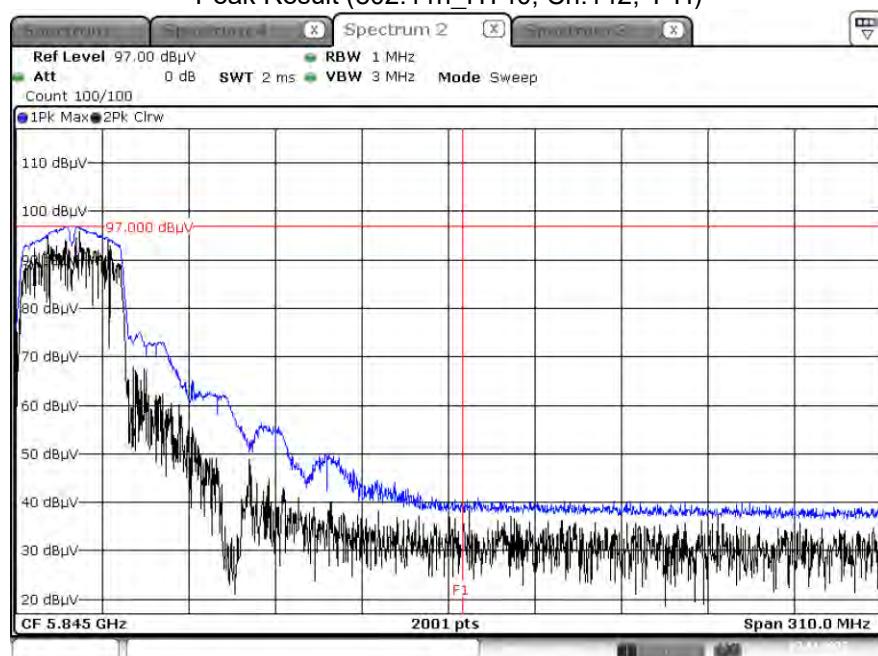

Peak Result (802.11ac_VHT40, Ch.142, Y-H)

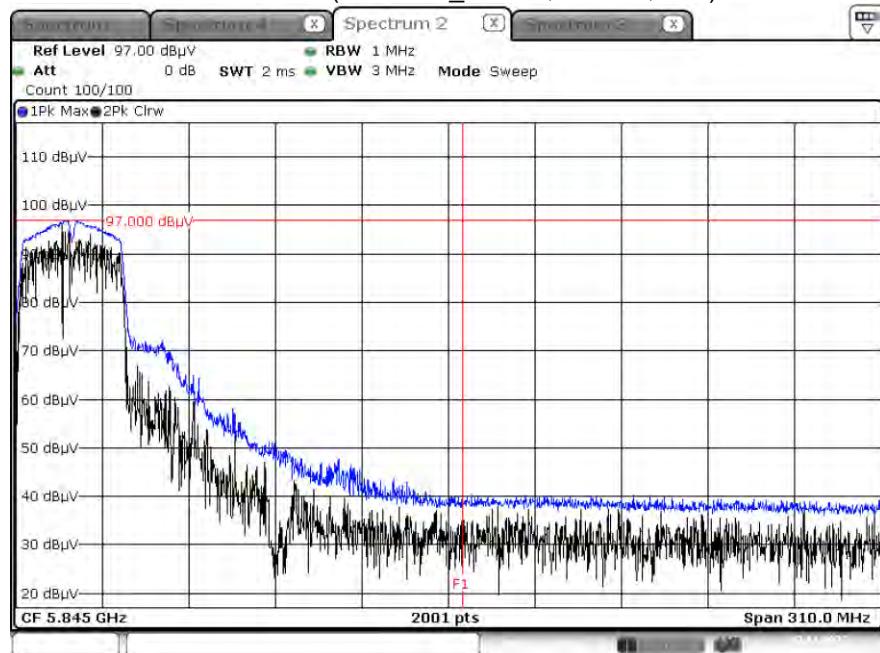

Peak Result (802.11ac_VHT80, Ch.138, Y-H)

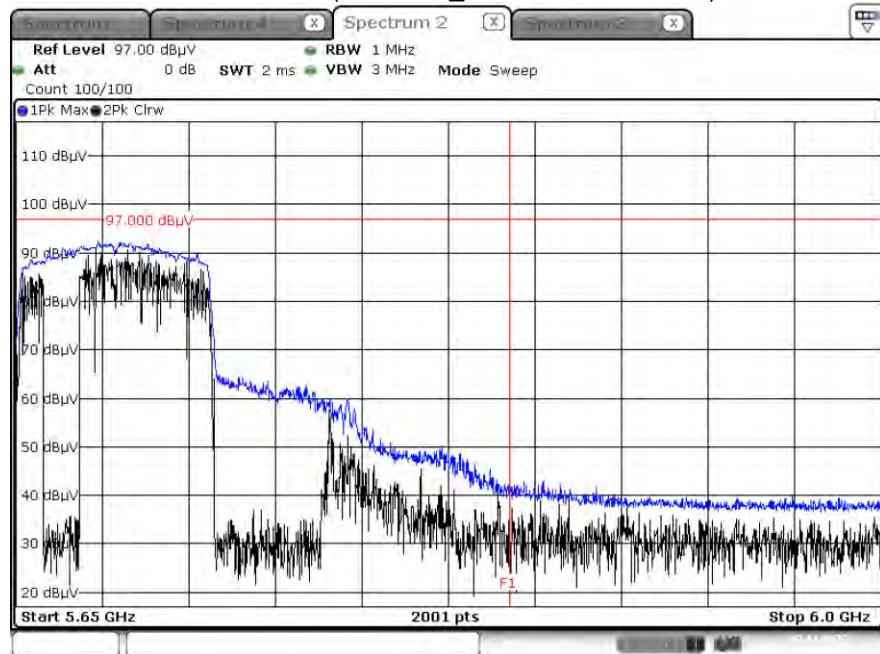


Note :


1. Only the worst case plots for Radiated Restricted Band Edge.
2. Red line : 5 850 MHz
3. Ambient Noise (Because of ambient noise, We attached only the worst plot without a data table)



□ Test Plots(UNII 3)



Peak Result (802.11a, Ch.149, Y-H)


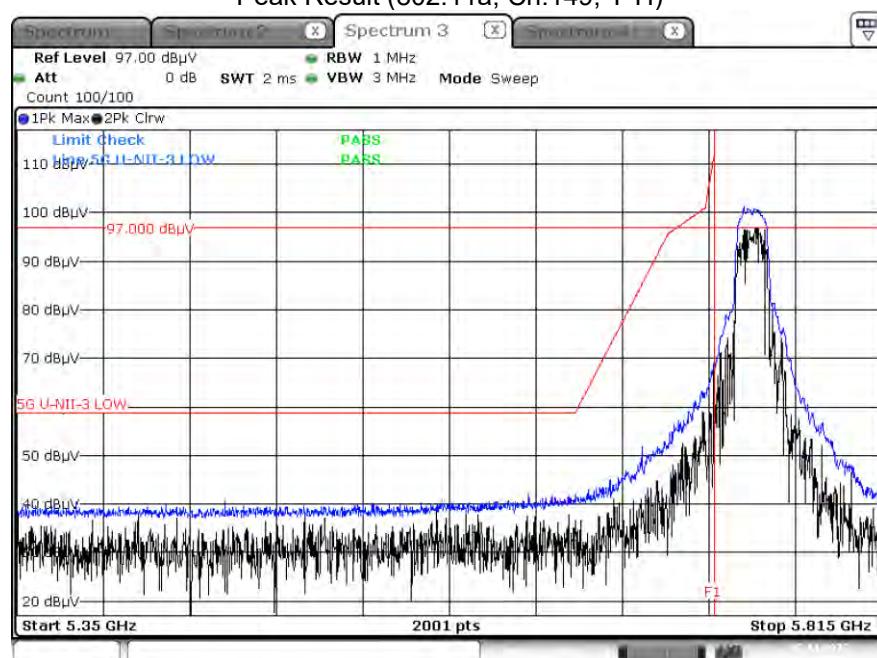


Peak Result (802.11n_HT20, Ch.149, Y-H)

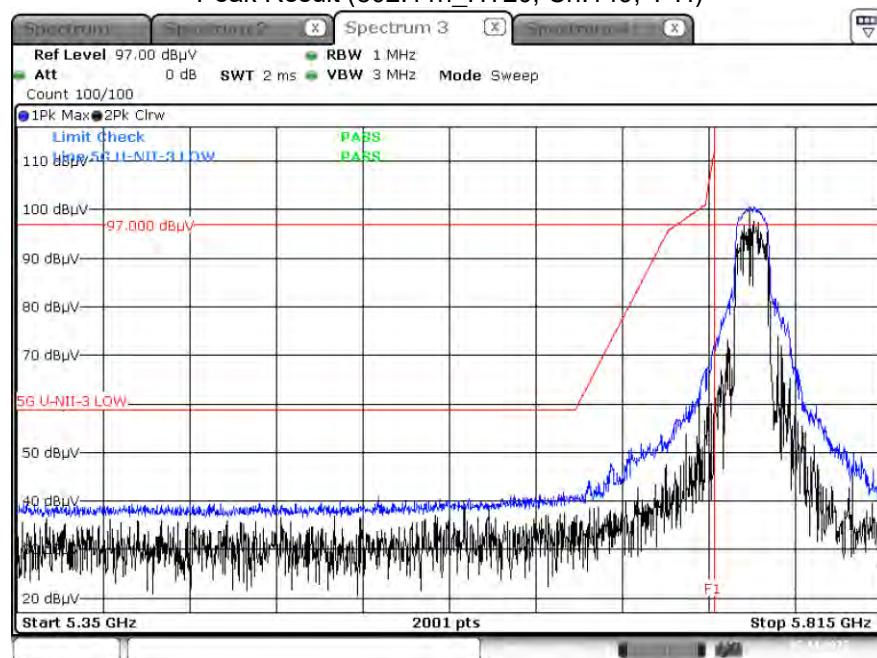


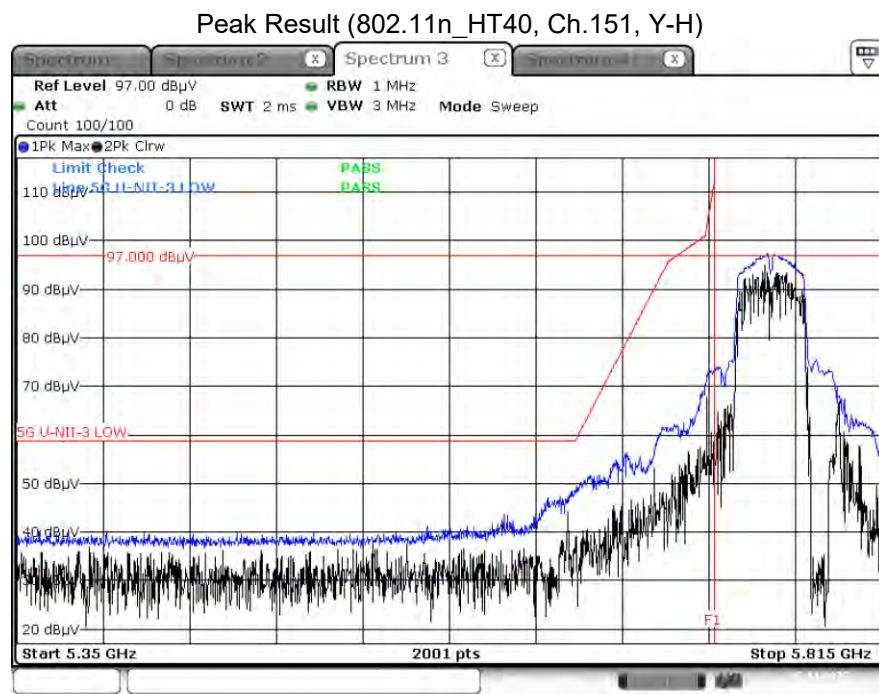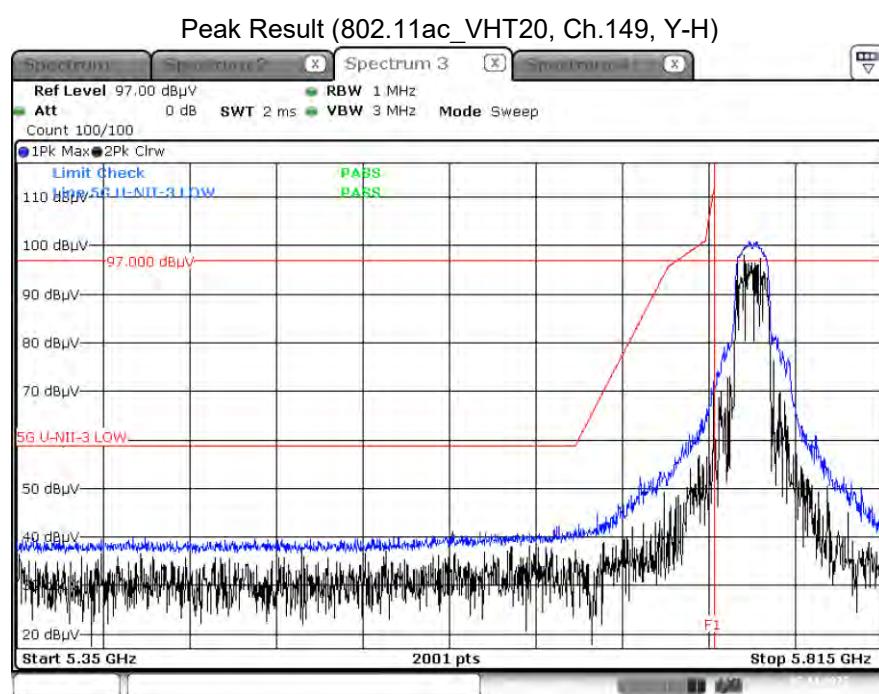

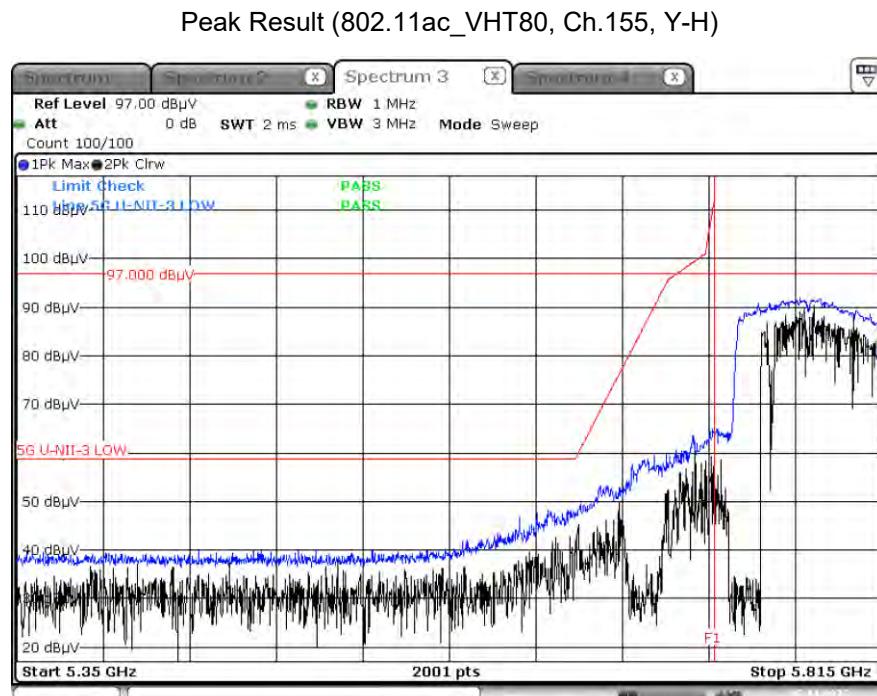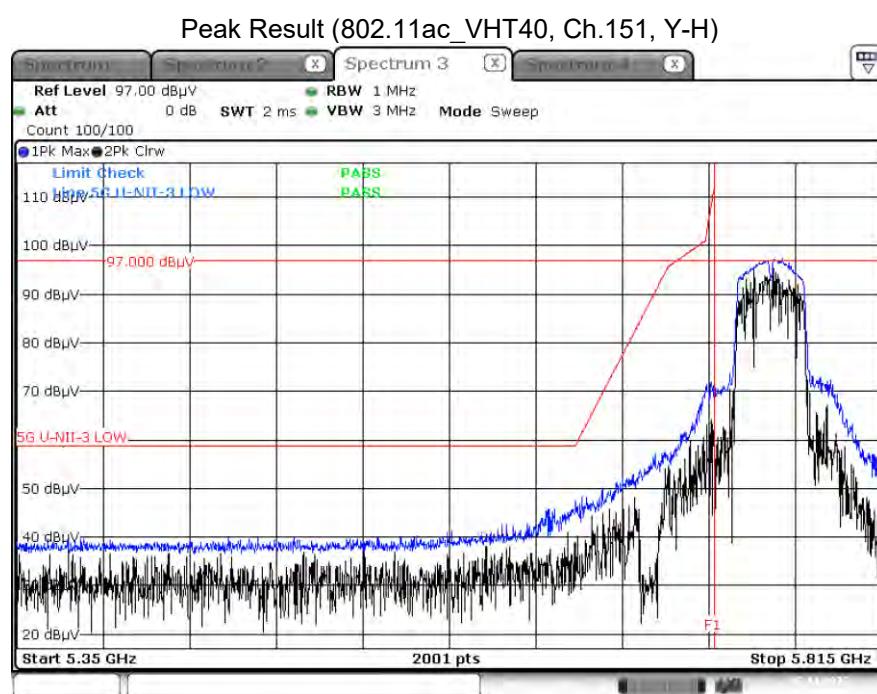


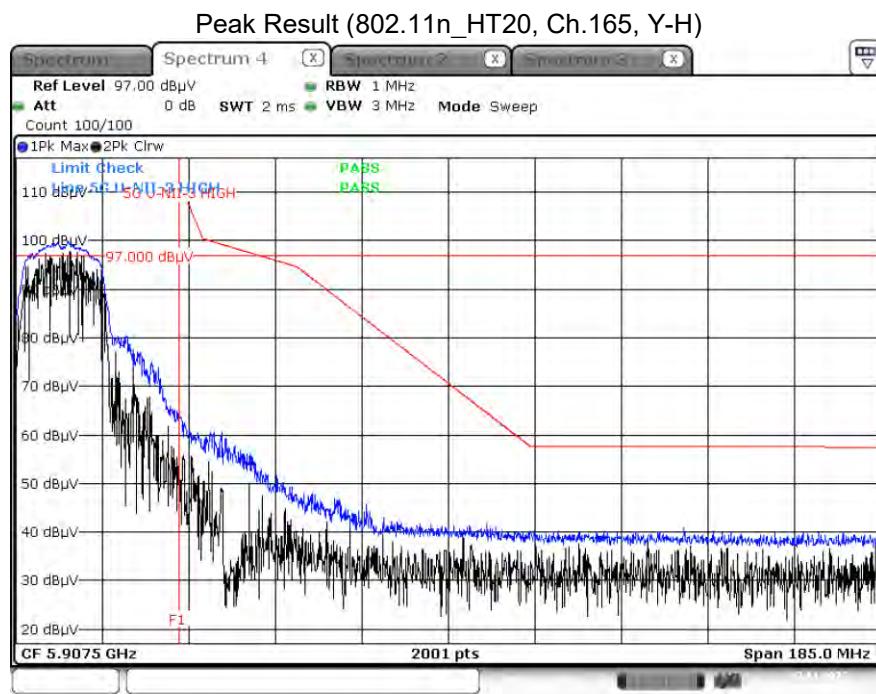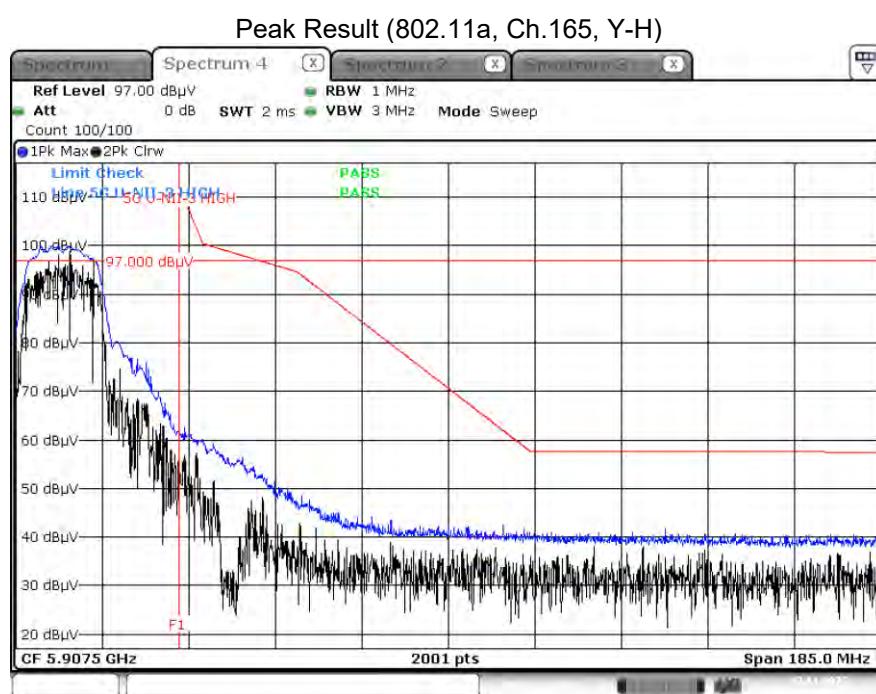


Peak Result (802.11ac_VHT20, Ch.165, Y-H)

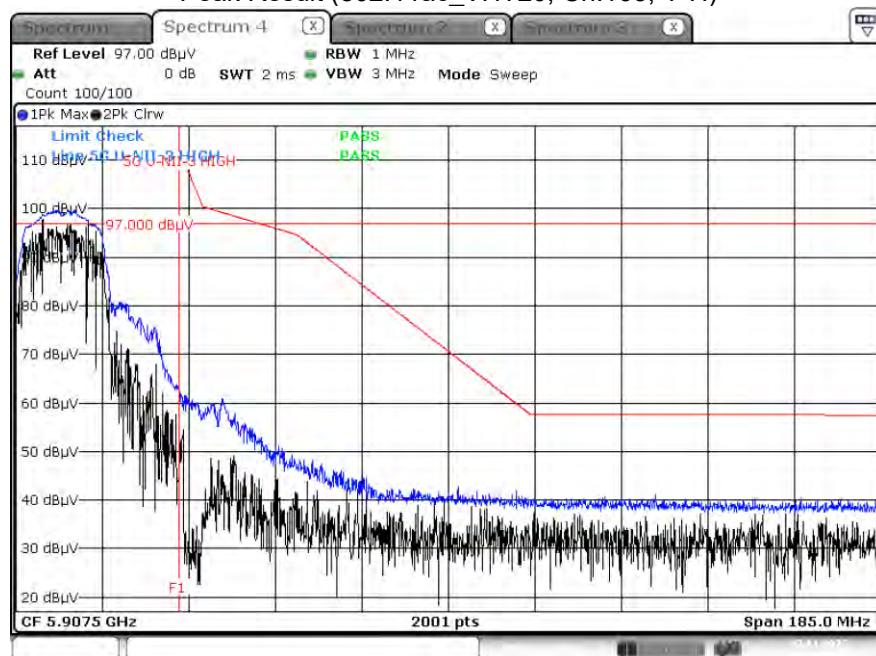


Peak Result (802.11n_HT40, Ch.159, Y-H)

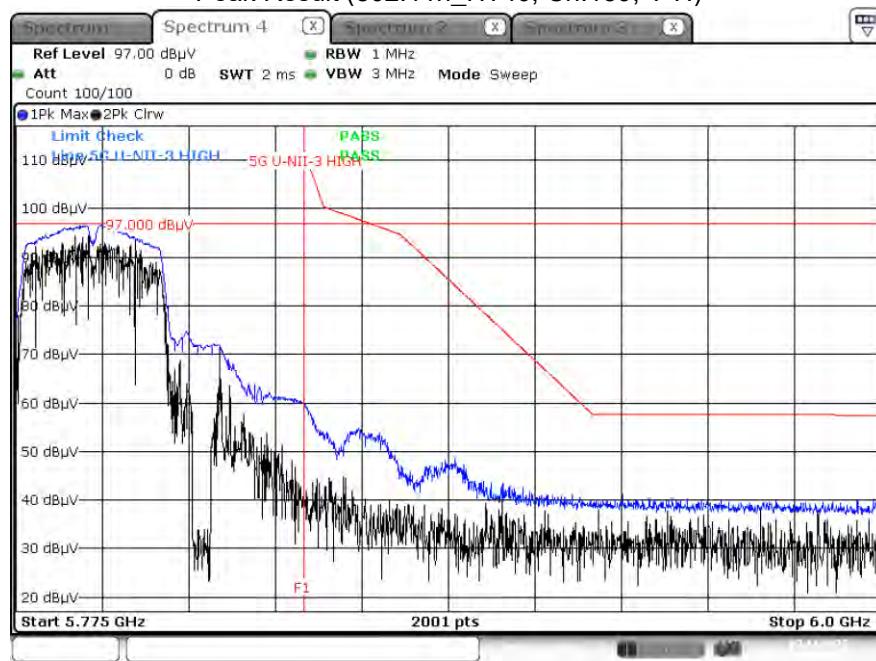

Peak Result (802.11ac_VHT40, Ch.159, Y-H)

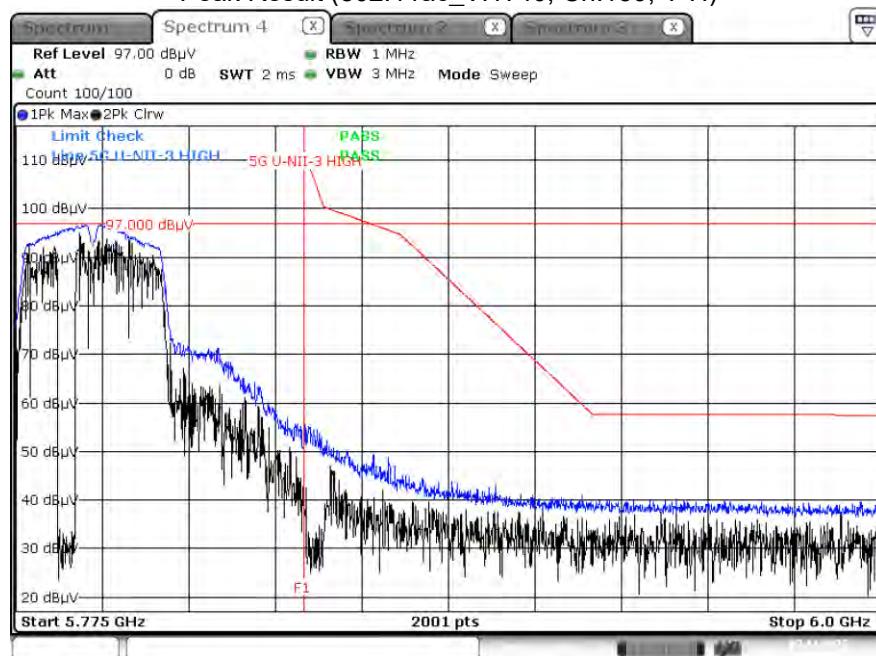

Peak Result (802.11ac_VHT80, Ch.155, Y-H)

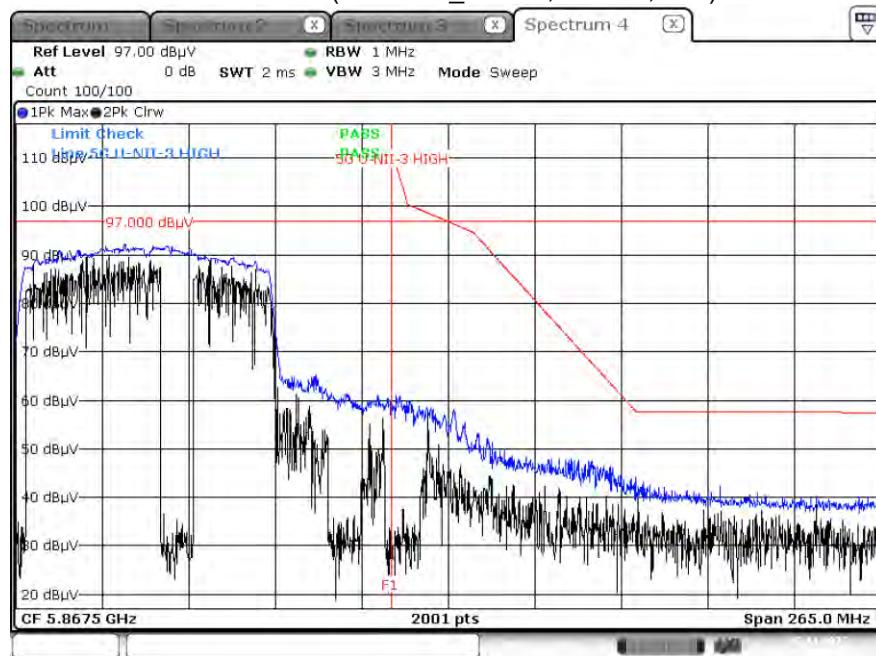

Note :

1. Only the worst case plots for U-NII-3 Out of Band e.i.r.p Emission.
2. U-NII-3 Low & High Band Edge RedLine is Final Test Limit about factor value compensation.

10.10 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions

Test


1 / 2

Test Report

Common Information

EUT : SM-G556B
Operating Conditions : 5G WLAN Mode
Comment :

Full Spectrum

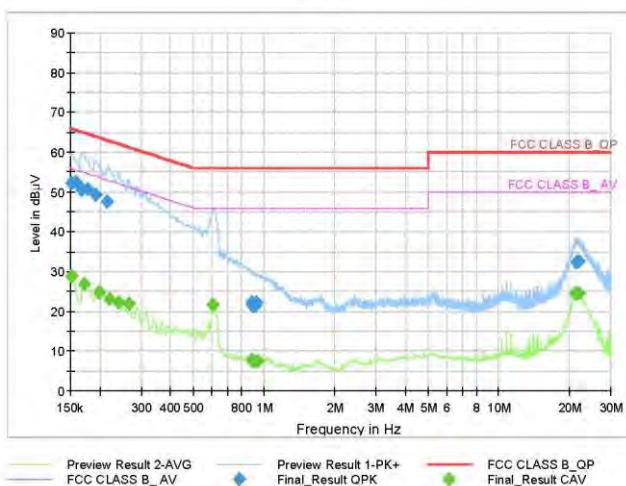

Final Result_QPK

Frequency (MHz)	QuasiPeak (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	52.29	65.88	13.59	9.000	L1	9.6
0.1590	52.37	65.52	13.15	9.000	L1	9.6
0.1680	50.51	65.06	14.54	9.000	L1	9.6
0.1770	50.85	64.63	13.78	9.000	L1	9.6
0.1928	49.41	63.92	14.51	9.000	L1	9.6
0.2153	47.52	63.00	15.48	9.000	L1	9.6
0.8870	21.78	56.00	34.22	9.000	N	9.7
0.8915	22.25	56.00	33.75	9.000	N	9.7
0.9005	21.42	56.00	34.58	9.000	N	9.7
0.9050	21.85	56.00	34.15	9.000	N	9.7
0.9185	21.47	56.00	34.53	9.000	N	9.7
0.9253	22.25	56.00	33.75	9.000	N	9.7
21.2923	32.20	60.00	27.80	9.000	L1	10.4
21.4273	32.40	60.00	27.60	9.000	L1	10.4
21.4980	32.43	60.00	27.57	9.000	L1	10.4
21.7828	32.48	60.00	27.52	9.000	L1	10.4
21.8345	32.61	60.00	27.39	9.000	L1	10.4
21.9110	32.54	60.00	27.46	9.000	L1	10.4

2023-10-20

오후 1:59:15

Test

2 / 2

Final Result CAV

Frequency (MHz)	C Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.1523	28.74	55.88	27.14	9.000	L1	9.6
0.1725	26.77	54.84	28.07	9.000	L1	9.6
0.1995	24.80	53.63	28.83	9.000	L1	9.6
0.2198	22.94	52.83	29.89	9.000	L1	9.6
0.2400	22.35	52.10	29.74	9.000	L1	9.6
0.2648	21.98	51.28	29.30	9.000	L1	9.6
0.6080	21.61	46.00	24.39	9.000	L1	9.6
0.8893	7.66	46.00	38.34	9.000	L1	9.6
0.8983	7.64	46.00	38.36	9.000	L1	9.6
0.9028	7.49	46.00	38.51	9.000	L1	9.6
0.9118	7.53	46.00	38.47	9.000	L1	9.6
0.9365	7.57	46.00	38.43	9.000	L1	9.6
21.2675	24.41	50.00	25.59	9.000	L1	10.4
21.2923	24.44	50.00	25.56	9.000	L1	10.4
21.3170	24.40	50.00	25.60	9.000	L1	10.4
21.8098	24.50	50.00	25.50	9.000	L1	10.4
21.8345	24.62	50.00	25.38	9.000	L1	10.4
21.8863	24.58	50.00	25.42	9.000	L1	10.4

2023-10-20

오후 1:59:15

11. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/02/2024	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	05/26/2024	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	02/22/2024	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/02/2024	Annual
Power Measurement Set	OSP 120	Rohde & Schwarz	101231	06/09/2024	Annual
Power Meter	N1911A	Agilent	MY45100523	03/06/2024	Annual
Power Sensor	N1921A	Agilent	MY57820067	03/06/2024	Annual
Directional Coupler	87300B	Agilent	3116A03621	10/30/2024	Annual
Power Splitter	11667B	Hewlett Packard	10545	02/06/2024	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/24/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/12/2024	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	08285	06/02/2024	Annual
Attenuator(20 dB)	18N-20dB	Rohde & Schwarz	8	03/08/2024	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A
FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	HCT CO., LTD.	N/A	N/A	N/A
Bluetooth Tester	CBT	Rohde & Schwarz	100808	02/16/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Amp & Filter Bank Switch Controller	FBSM-01B	T&M system	TM19050002	N/A	N/A
Loop Antenna	1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	08/16/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-2296	05/18/2024	Biennial
Horn Antenna(15 GHz ~ 40 GHz)	BBHA9170	Schwarzbeck	BBHA9170342	09/29/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/12/2024	Annual
Band Reject Filter	WRCJV2400/2483.5-2370/2520-60/12SS	Wainwright Instruments	2	01/05/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	5	06/12/2024	Annual
Band Reject Filter	WRCJV12-4900-5100-5900-6100-50SS	Wainwright Instruments	6	06/12/2024	Annual
High Pass Filter(7 GHz ~ 18 GHz)	WHKX10-7150-8000-18000-50SS	Wainwright Instruments	1	03/02/2024	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/01/2023	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/02/2024	Annual
Bluetooth Tester	TC-3000C	TESCOM	3000C000175	03/28/2024	Annual
RF Switching System	FMSR-05B (HPF(3~18GHz) + LNA1(1~18GHz))	T&M system	S1L1	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(10dB) + LNA1(1~18GHz))	T&M system	S1L2	01/17/2024	Annual
RF Switching System	FMSR -05B (ATT(3dB) + LNA1(1~18GHz))	T&M system	S1L3	01/17/2024	Annual
RF Switching System	FMSR -05B (LNA1(1~18GHz))	T&M system	S1L4	01/17/2024	Annual
RF Switching System	FMSR -05B (HPF(7~18GHz) + LNA2(6~18GHz))	T&M system	S1L5	01/17/2024	Annual
RF Switching System	FMSR -05B (Thru(30MHz ~ 18GHz))	T&M system	S1L6	01/17/2024	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

12. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2311-FC045-P