



FCC CFR47 PART 15 SUBPART C

Bluetooth

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC

MODEL NUMBER : SM-G611S, SM-G611K, SM-G611L

FCC ID: A3LSMG611KOR

REPORT NUMBER: 4788269334-E3V2

ISSUE DATE: JAN 05, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/04/18	Initial issue	Junwhan Lee
V2	01/05/18	Revised to address TCB's question	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. WORST-CASE CONFIGURATION AND MODE.....	8
5.5. DESCRIPTION OF TEST SETUP.....	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. REFERENCE MEASUREMENT RESULTS.....	12
7.1. 20 dB AND 99% BANDWIDTH	12
7.1.1. BASIC DATA RATE GFSK MODULATION	12
7.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION.....	12
7.1.3. ENHANCED DATA RATE 8PSK MODULATION	12
7.1.4. 20 dB AND 99% BANDWIDTH PLOTS.....	13
8. SUMMARY TABLE	16
9. ANTENNA PORT TEST RESULTS.....	17
9.1. HOPPING FREQUENCY SEPARATION	17
9.2. NUMBER OF HOPPING CHANNELS.....	18
9.3. AVERAGE TIME OF OCCUPANCY.....	20
9.4. OUTPUT POWER.....	24
9.4.1. BASIC DATA RATE GFSK MODULATION	24
9.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION	24
9.4.3. ENHANCED DATA RATE 8PSK MODULATION	24
9.4.4. OUTPUT POWER PLOTS.....	25
9.5. AVERAGE POWER.....	28
9.5.1. BASIC DATA RATE GFSK MODULATION	28
9.5.2. DATA RATE PI/4-DQPSK MODULATION	28
9.5.3. ENHANCED DATA RATE 8PSK MODULATION	28

9.6.	CONDUCTED SPURIOUS EMISSIONS.....	29
9.6.1.	BASIC DATA RATE GFSK MODULATION	30
10.	RADIATED TEST RESULTS	42
10.1.	LIMITS AND PROCEDURE.....	42
10.2.	TRANSMITTER ABOVE 1 GHz.....	44
10.2.1.	BASIC DATA RATE GFSK MODULATION	44
10.2.2.	ENHANCED DATA RATE 8PSK MODULATION.....	54
10.3.	WORST-CASE BELOW 1 GHz	64
11.	AC POWER LINE CONDUCTED EMISSIONS	66
12.	SETUP PHOTOS	71

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC
MODEL NUMBER: SM-G611S, SM-G611K, SM-G611L
SERIAL NUMBER: R39JB04JBD, R39JB04JBP (RADIATED);
R39JB04JMRA (CONDUCTED)
DATE TESTED: DEC 11, 2017 - DEC 28, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. FCC DA 00-705 Filling and measurement guidelines for FHSS systems
4. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC. This test report addresses the DSS (BT) operational mode.

SM-G611S and SM-G611K/SM-G611L are same hardware and only difference is S/W user interface for different network operator. SM-G611S was used for the tests.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2402 - 2480	Basic GFSK	Average	9.443	8.796
		Peak	10.028	10.065
	Enhanced Pi/4-DPSK	Average	5.532	3.574
		Peak	7.962	6.255
	Enhanced 8PSK	Average	5.565	3.602
		Peak	8.353	6.844

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of 0.91 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 9.5.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50KWK	DW2J609DS/A -E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.
 Test software enable BT communications.

SETUP DIAGRAM FOR TESTS

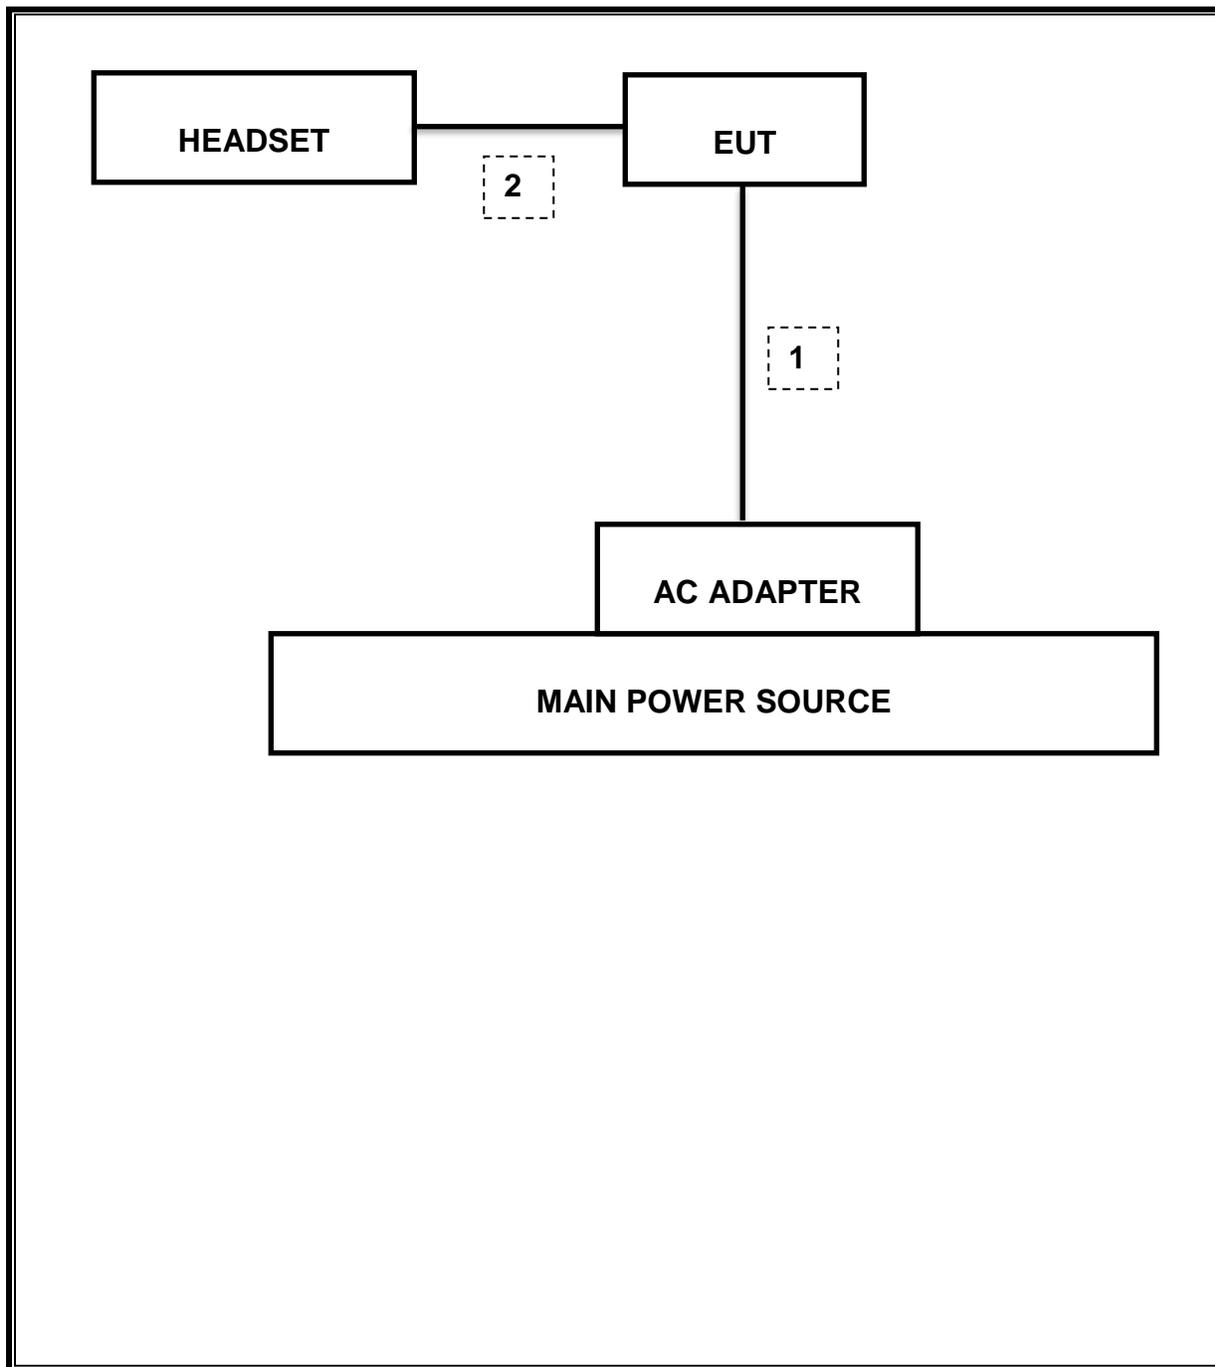

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Preamplifier	ETS	3116C-PA	00168841	11-13-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier	ETS	3115-PA	00167475	08-09-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
ATTENUATOR	PASTERNAK	PE7087-10	A009	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-08-18
LISN	R&S	ENV-216	101837	08-09-18
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-07-18
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. REFERENCE MEASUREMENT RESULTS

7.1. 20 dB AND 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 20 dB bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

7.1.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [kHz]
Low	2402	1.050	905.900
Mid	2441	1.029	930.860
High	2480	1.051	927.710
Worst		1.051	930.860

7.1.2. ENHANCED DATA RATE Pi/4-DQPSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.294	1.199
Mid	2441	1.291	1.169
High	2480	1.288	1.202
Worst		1.294	1.202

7.1.3. ENHANCED DATA RATE 8PSK MODULATION


Channel	Frequency [MHz]	20 dB Bandwidth [MHz]	99% Bandwidth [MHz]
Low	2402	1.316	1.196
Mid	2441	1.316	1.197
High	2480	1.316	1.168
Worst		1.316	1.197

7.1.4. 20 dB AND 99% BANDWIDTH PLOTS


GFSK BANDWIDTH

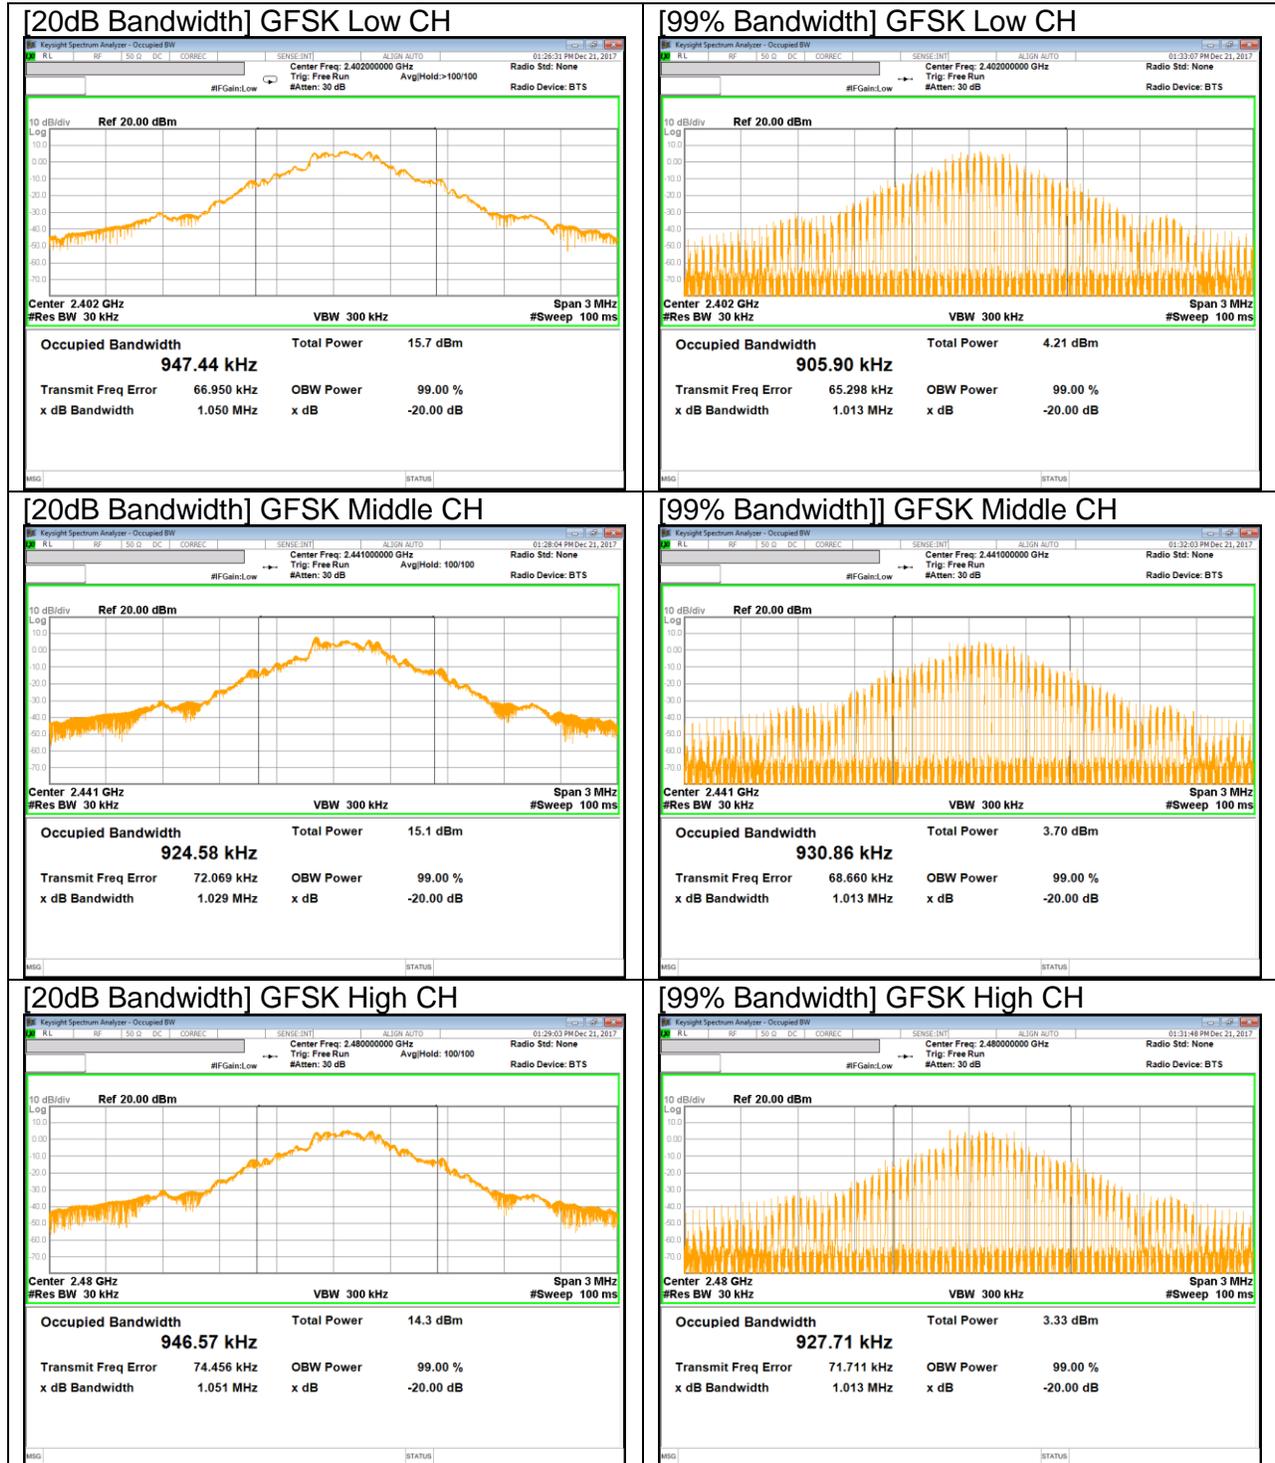

Pi/4-DQPSK BANDWIDTH

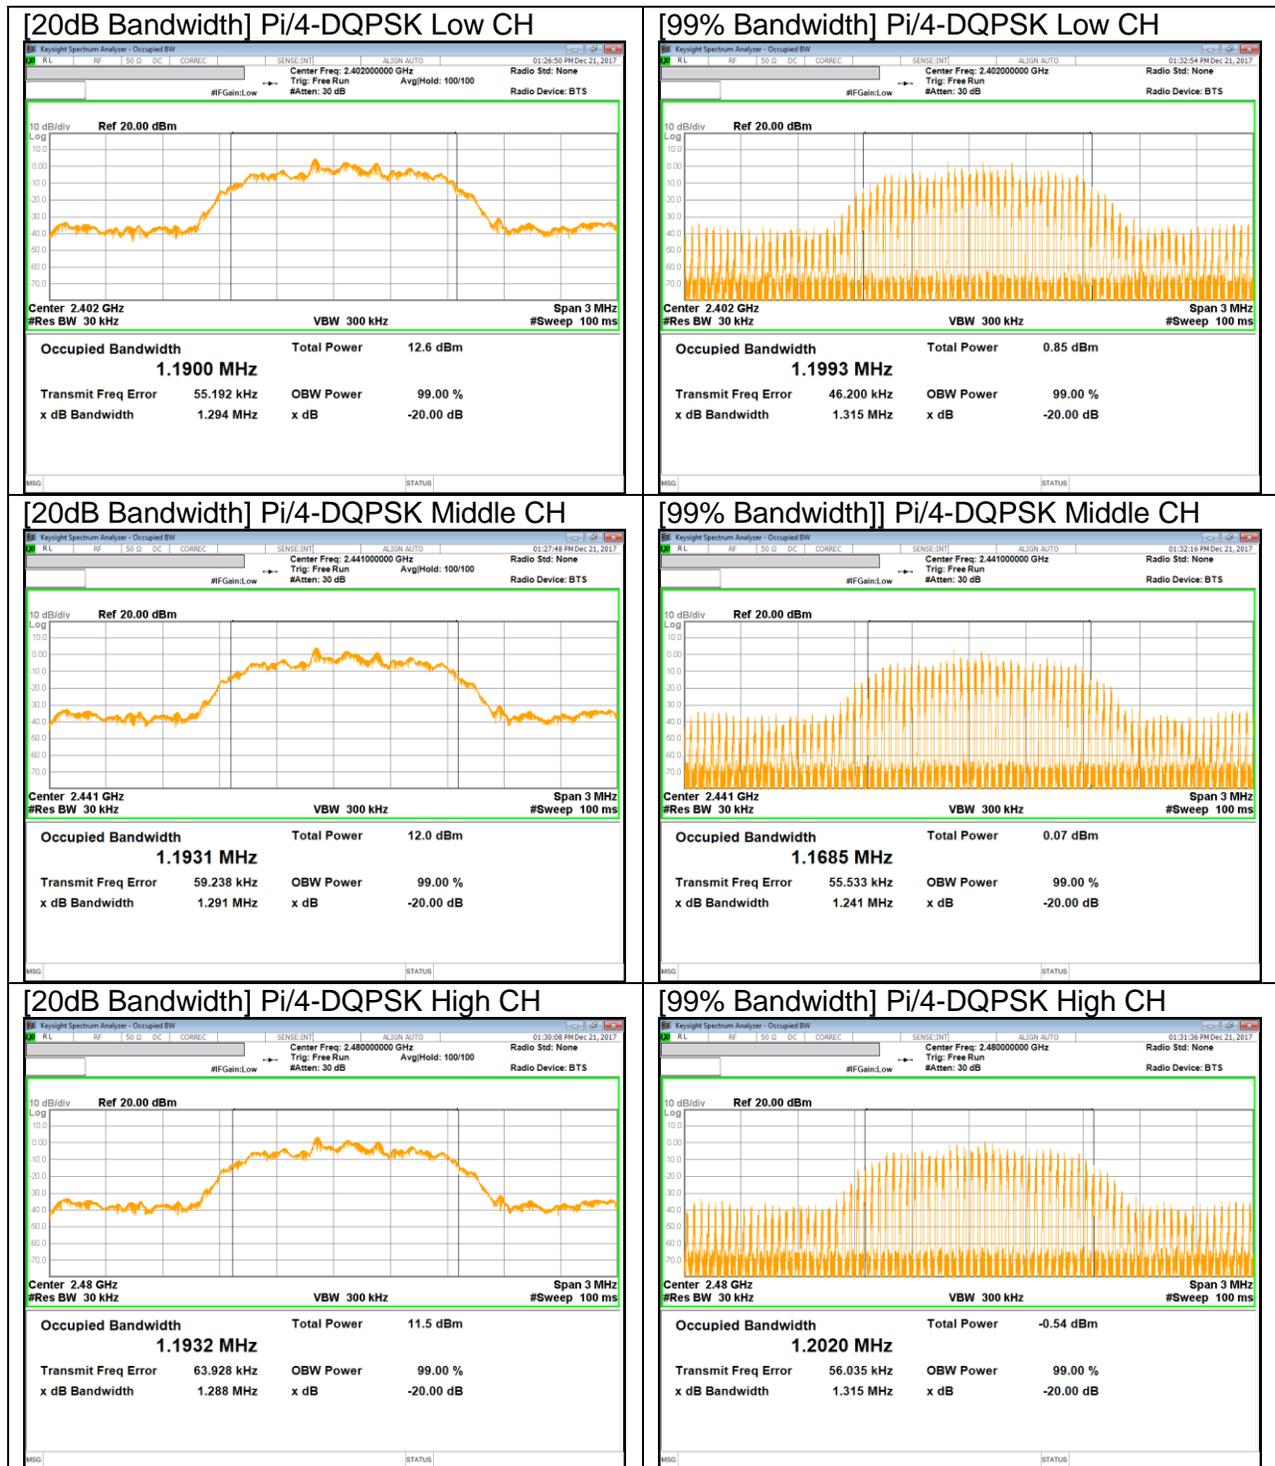

8PSK BANDWIDTH

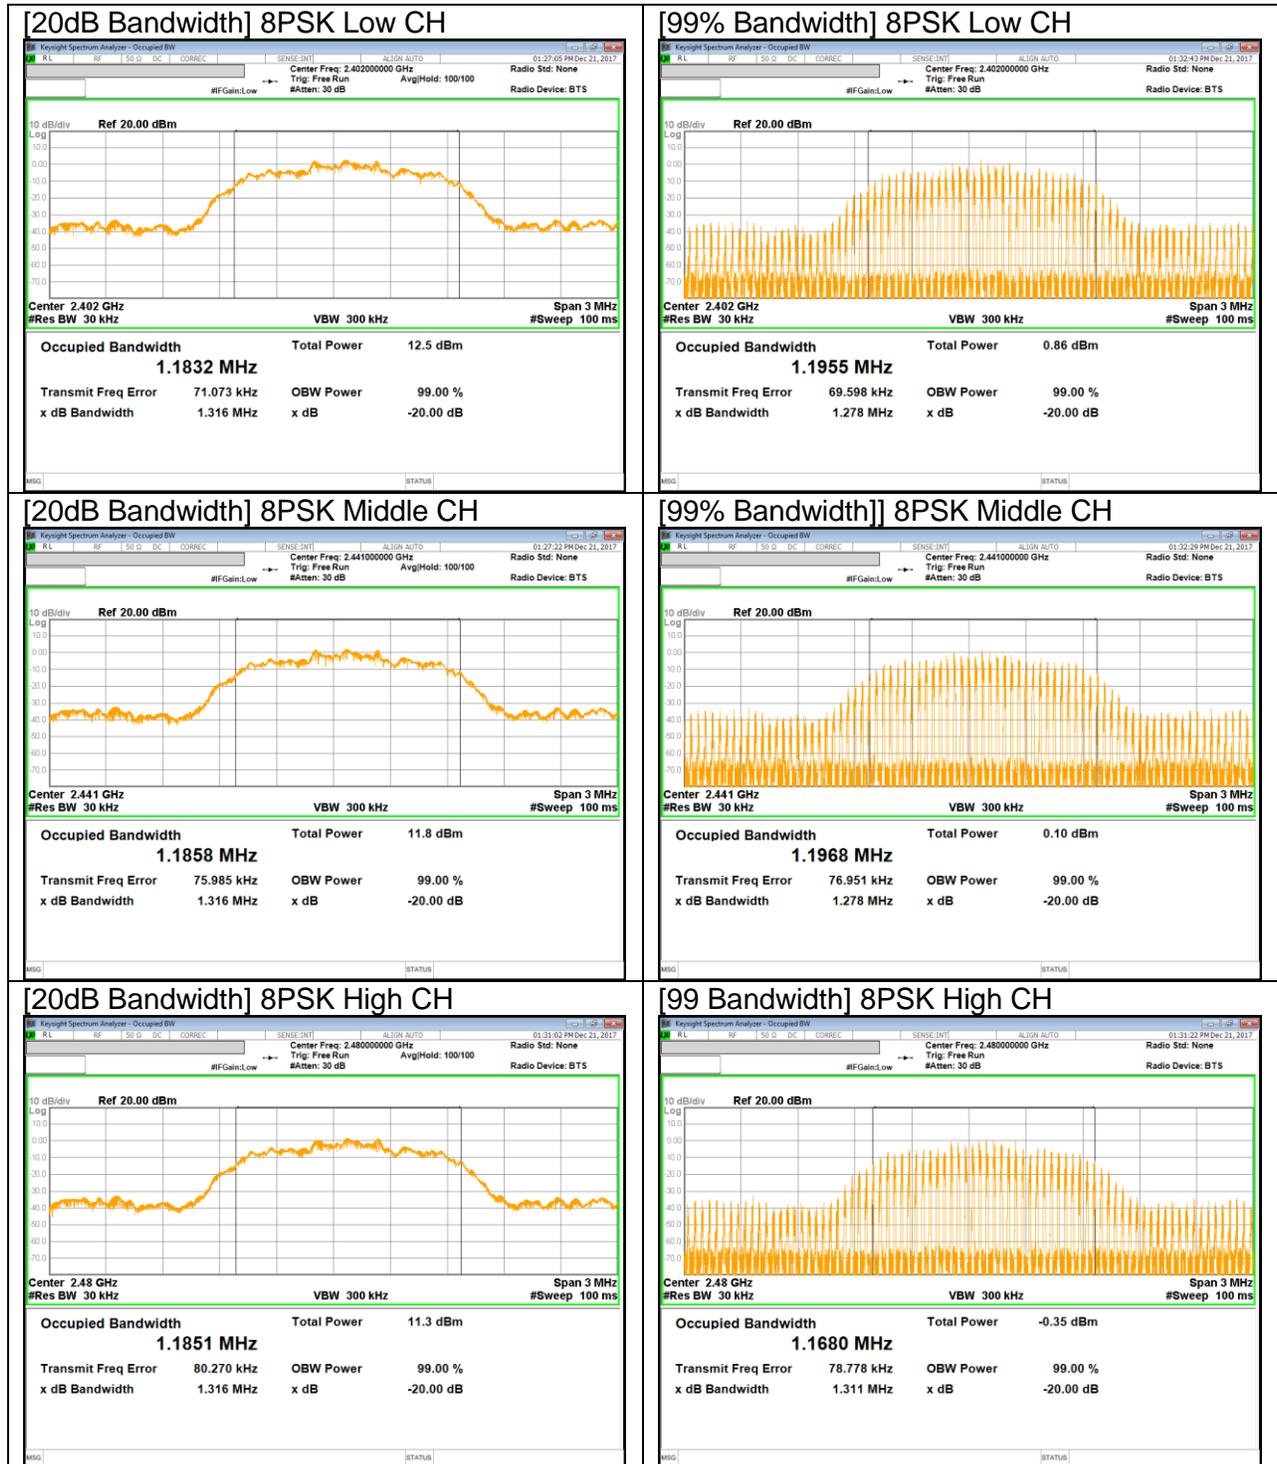

8. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-40.225 dBm
15.247 (b)(1)	TX conducted output power	<21dBm		Pass	10.028 dBm (Peak)
15.247 (a)(1)	Hopping frequency separation	> 25KHz		Pass	1 MHz
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass	0.34632 sec
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass	41.26 dBuV (Pk)
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass	44.73 dBuV/m (Av)

9. ANTENNA PORT TEST RESULTS

9.1. HOPPING FREQUENCY SEPARATION

LIMIT

FCC §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

HOPPING FREQUENCY SEPARATION PLOT



9.2. NUMBER OF HOPPING CHANNELS

LIMIT

FCC §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


RESULTS

Normal Mode: 79 Channels observed.

NUMBER OF HOPPING CHANNELS PLOTS

NUMBER OF HOPPING CHANNELS (100 MHz SPAN)



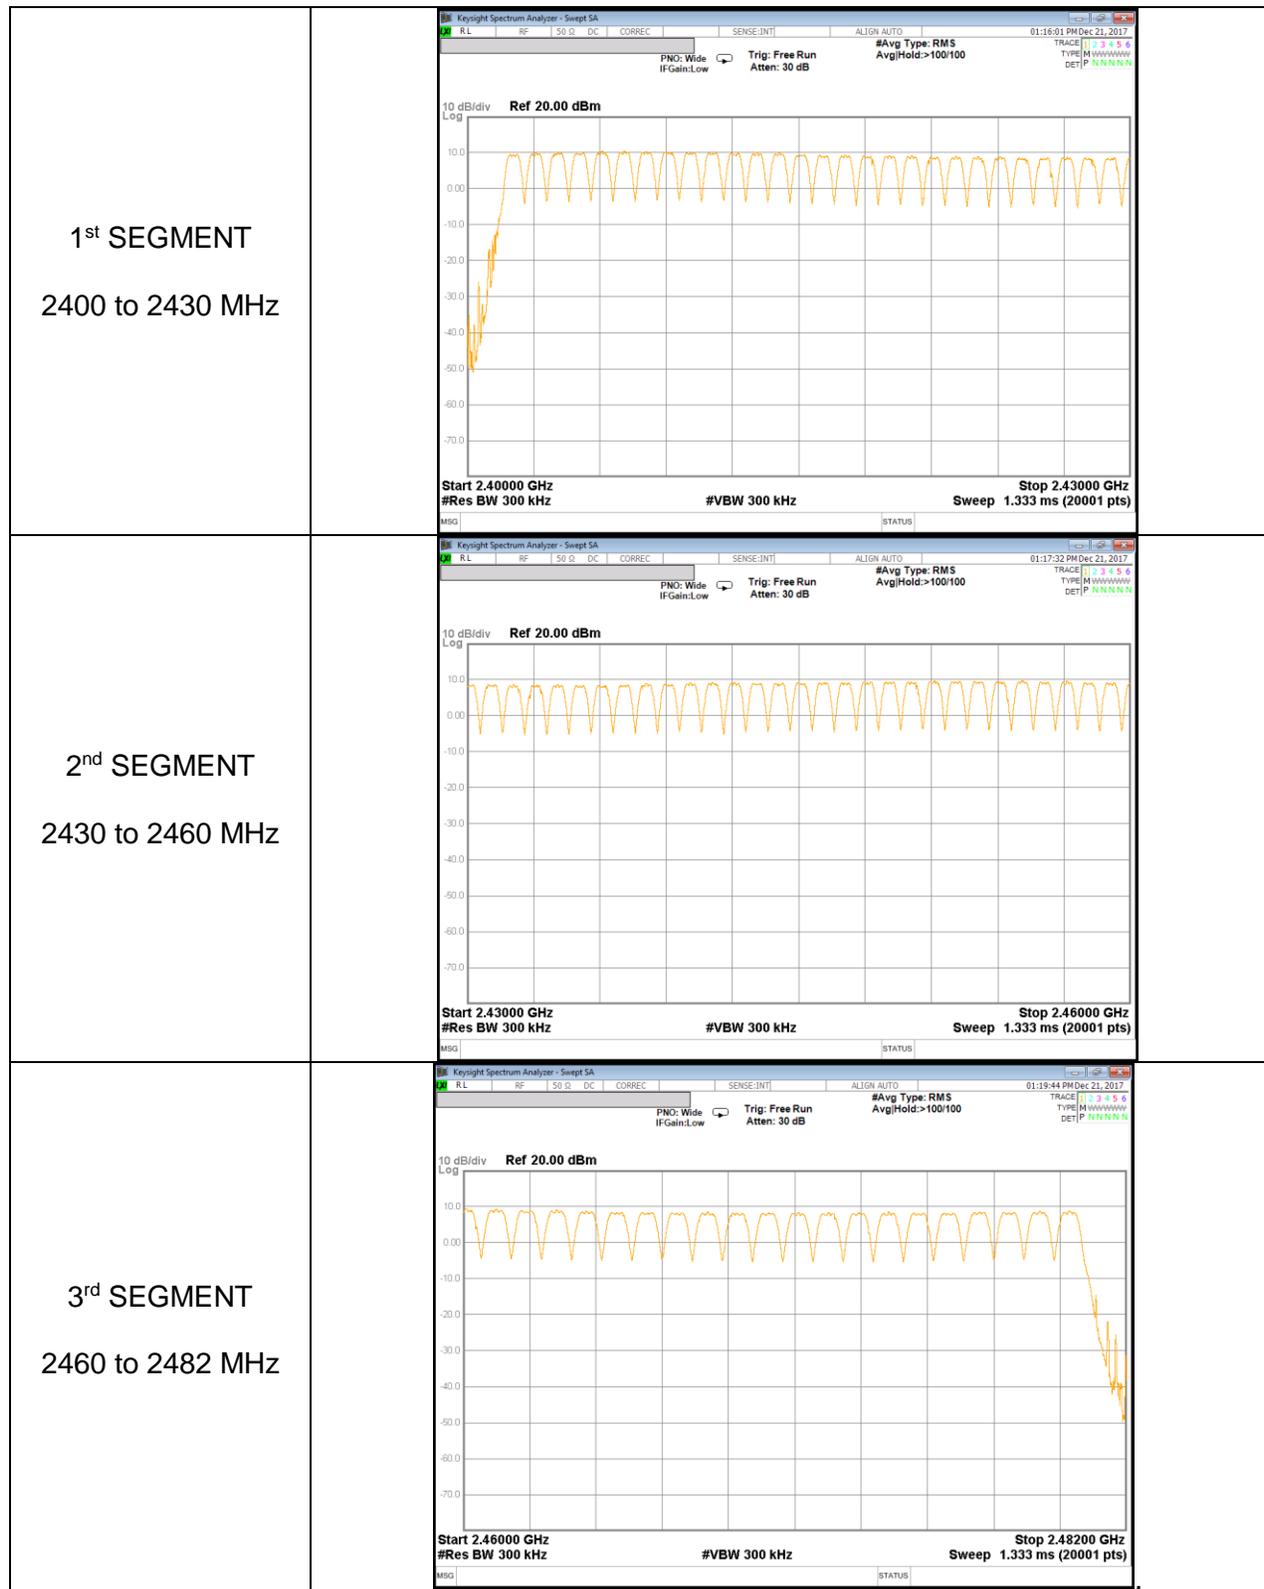

9.3. AVERAGE TIME OF OCCUPANCY

LIMIT

FCC §15.247 (a) (1) (iii)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$.

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels * 0.4 seconds) is equal to $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$.


RESULTS[GFSK]

	Width [msec]	Pulses in 3.16 seconds	of Occupancy [sec]	[sec]	[sec]
GFSK Normal					
DH1	0.382	32	0.122368	0.4	-0.2776
DH3	1.638	16	0.262080	0.4	-0.1379
DH5	2.886	12	0.346320	0.4	-0.0537
GFSK AFH					
DH Packet	Pulse Width [msec]	Number of Pulses in 0.8 seconds	Average Time of Occupancy [sec]	Limit [sec]	Margin [sec]
GFSK AFH					
DH1	0.382	8	0.030592	0.4	-0.36941
DH3	1.638	4	0.065520	0.4	-0.33448
DH5	2.886	3	0.086580	0.4	-0.31342

DH1

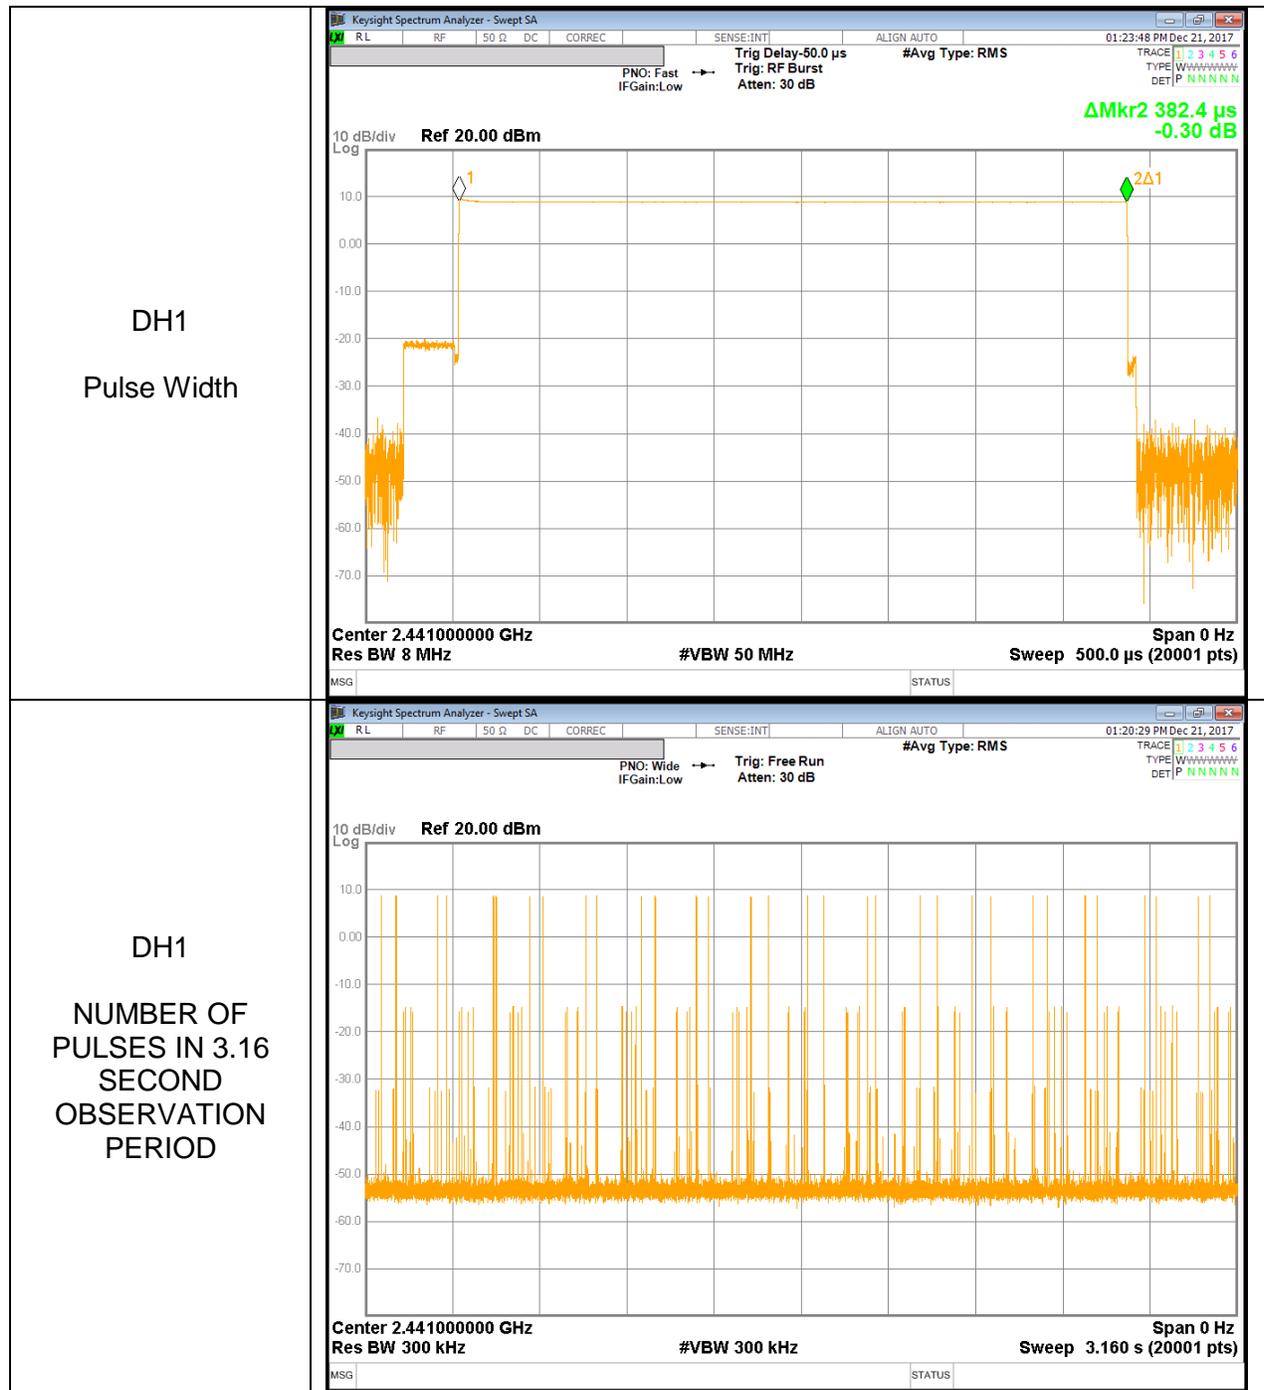

DH5

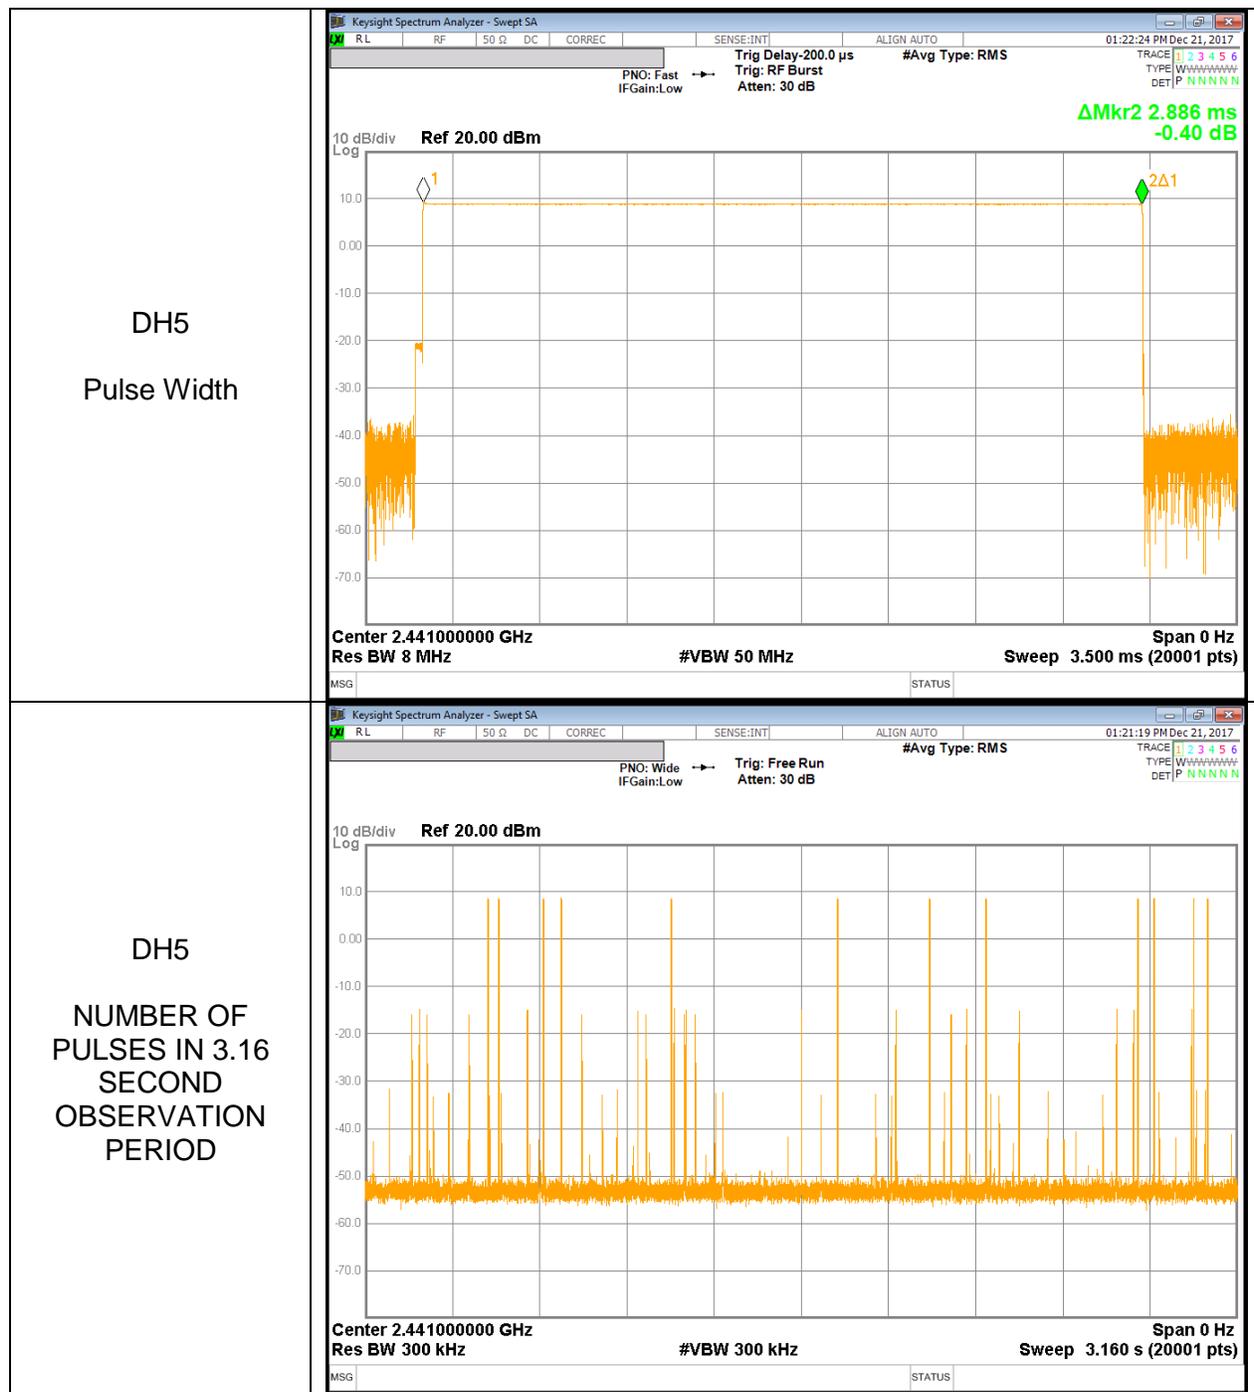

9.4. OUTPUT POWER

LIMIT

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

RESULTS

9.4.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	10.028	21	-10.972
Middle	2441	9.411	21	-11.589
High	2480	8.955	21	-12.045
Worst		10.028	21	-10.972

9.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	7.962	21	-13.038
Middle	2441	7.211	21	-13.789
High	2480	6.785	21	-14.215
Worst		7.962	21	-13.038

9.4.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2402	8.353	21	-12.647
Middle	2441	7.571	21	-13.429
High	2480	7.011	21	-13.989
Worst		8.353	21	-12.647

9.4.4. OUTPUT POWER PLOTS

GFSK OUTPUT POWER

<p>GFSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 01:01:29 PM Dec 21, 2017 #Avg Type: RMS AvgHold: 100/100 Trig: Free Run Atten: 30 dB PNO: Fast IFGain: Low Ref 20.00 dBm Mkr1 2.401 961 0 GHz 10.028 dBm 10 dB/div Log Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>GFSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 12:59:43 PM Dec 21, 2017 #Avg Type: RMS AvgHold: 100/100 Trig: Free Run Atten: 30 dB PNO: Fast IFGain: Low Ref 20.00 dBm Mkr1 2.441 097 0 GHz 9.411 dBm 10 dB/div Log Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>GFSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 12:59:15 PM Dec 21, 2017 #Avg Type: RMS AvgHold: 100/100 Trig: Free Run Atten: 30 dB PNO: Fast IFGain: Low Ref 20.00 dBm Mkr1 2.480 057 0 GHz 8.955 dBm 10 dB/div Log Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

Pi/4-DPSK OUTPUT POWER

<p>Pi/4-DPSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.402 190.0 GHz 7.962 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.441 052.0 GHz 7.211 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>
<p>Pi/4-DPSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA Ref 20.00 dBm Mkr1 2.480 156.0 GHz 6.785 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Span 10.00 MHz Sweep 1.333 ms (20001 pts)</p>

8PSK OUTPUT POWER

<p>8PSK Low CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 01:00:46 PM Dec 21, 2017 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.401 997 5 GHz 8.353 dBm Ref 20.00 dBm 10 dB/div Log Center 2.402000 GHz #Res BW 3.0 MHz #VBW 50 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK Middle CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 01:00:21 PM Dec 21, 2017 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.441 131 5 GHz 7.571 dBm Ref 20.00 dBm 10 dB/div Log Center 2.441000 GHz #Res BW 3.0 MHz #VBW 50 MHz Sweep 1.333 ms (20001 pts)</p>
<p>8PSK High CH</p>	<p>KeySight Spectrum Analyzer - Swept SA 12:58:30 PM Dec 21, 2017 #Avg Type: RMS Avg/Hold: 100/100 Mkr1 2.480 007 0 GHz 7.011 dBm Ref 20.00 dBm 10 dB/div Log Center 2.480000 GHz #Res BW 3.0 MHz #VBW 50 MHz Sweep 1.333 ms (20001 pts)</p>

9.5. AVERAGE POWER

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

9.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	9.443	8.80
Middle	2441	8.743	7.49
High	2480	7.943	6.23

9.5.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	5.532	3.57
Middle	2441	4.846	3.05
High	2480	4.295	2.69

9.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2402	5.565	3.60
Middle	2441	4.852	3.06
High	2480	4.348	2.72

9.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

9.6.1. BASIC DATA RATE GFSK MODULATION

GFSK Mode

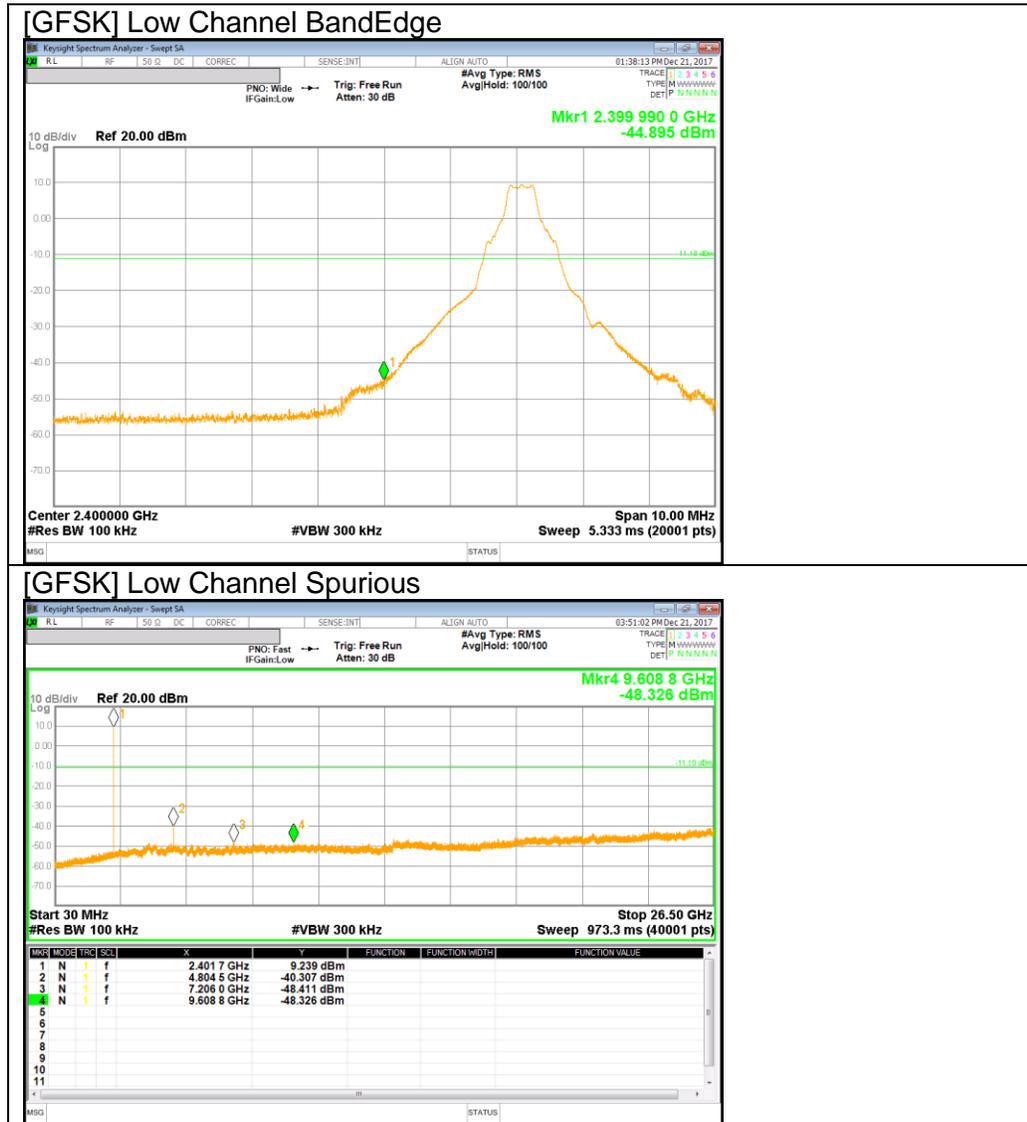


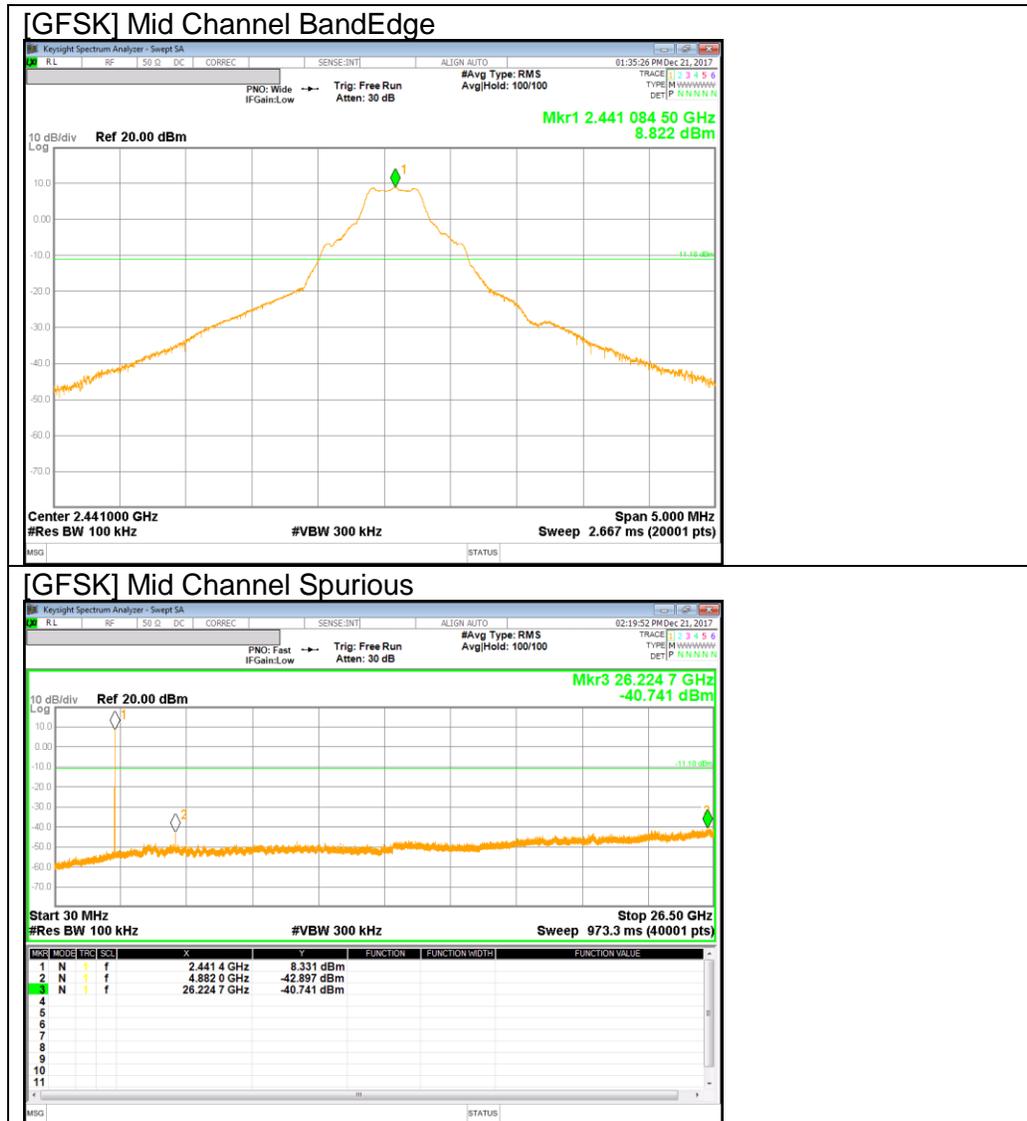

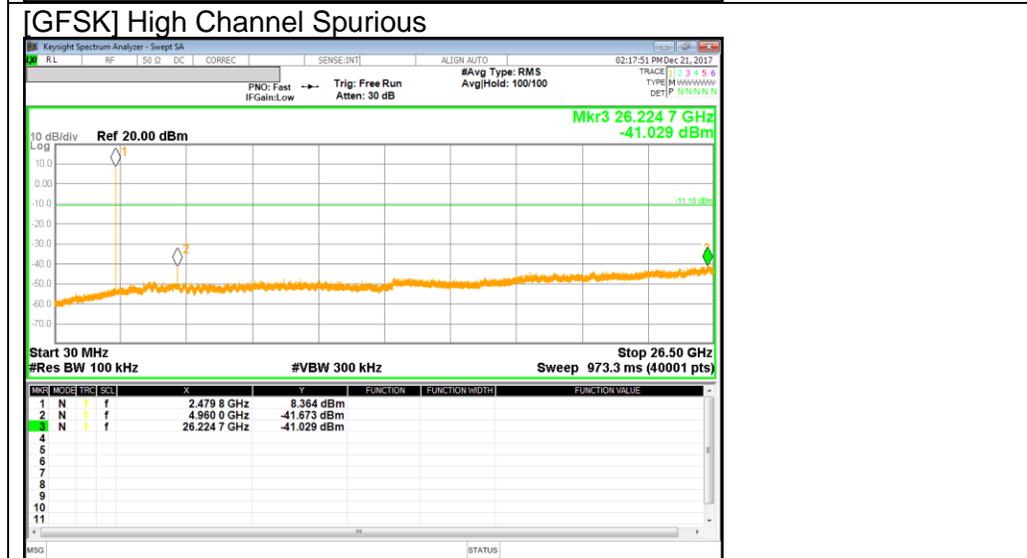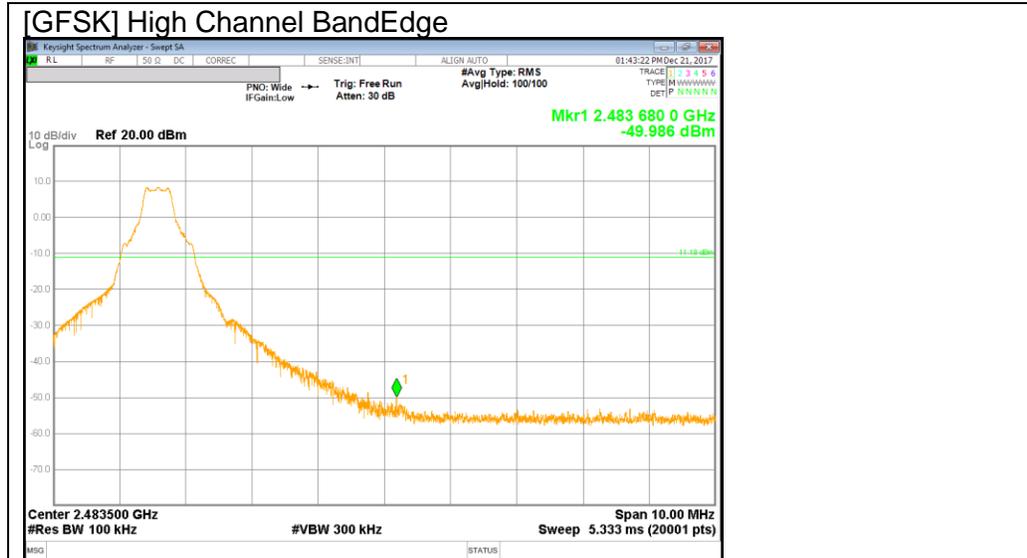


BandEdge Emission at GFSK Hopping Mode


[GFSK Hopping Mode] Low Channel BandEdge


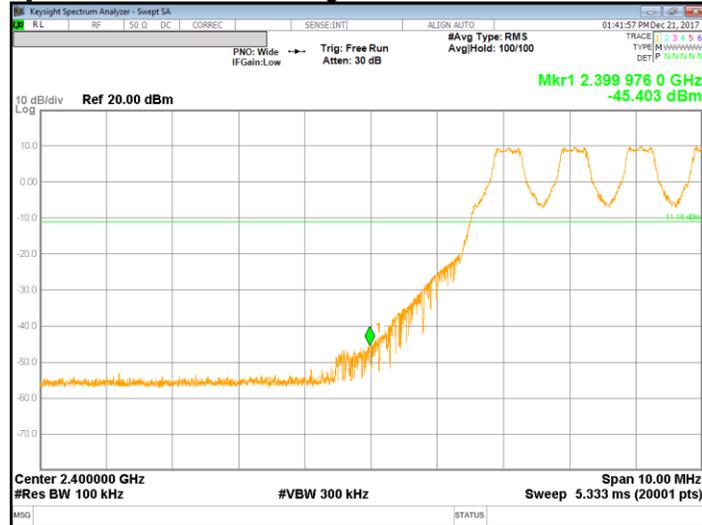




[GFSK Hopping Mode] High Channel BandEdge

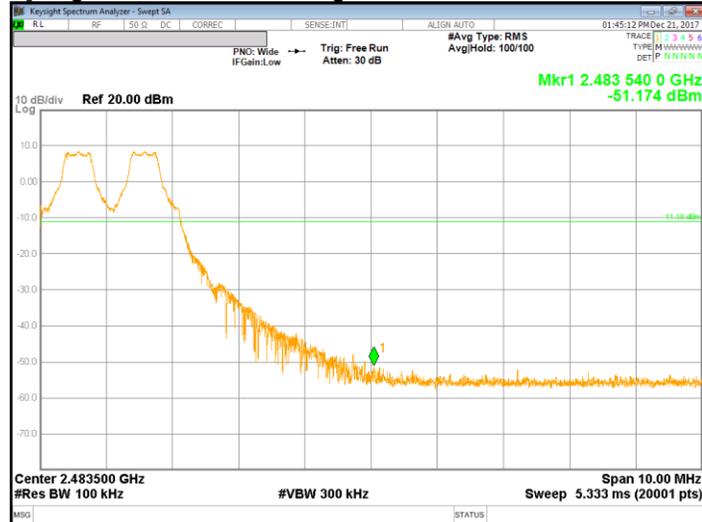

PI/4-DQPSK Mode

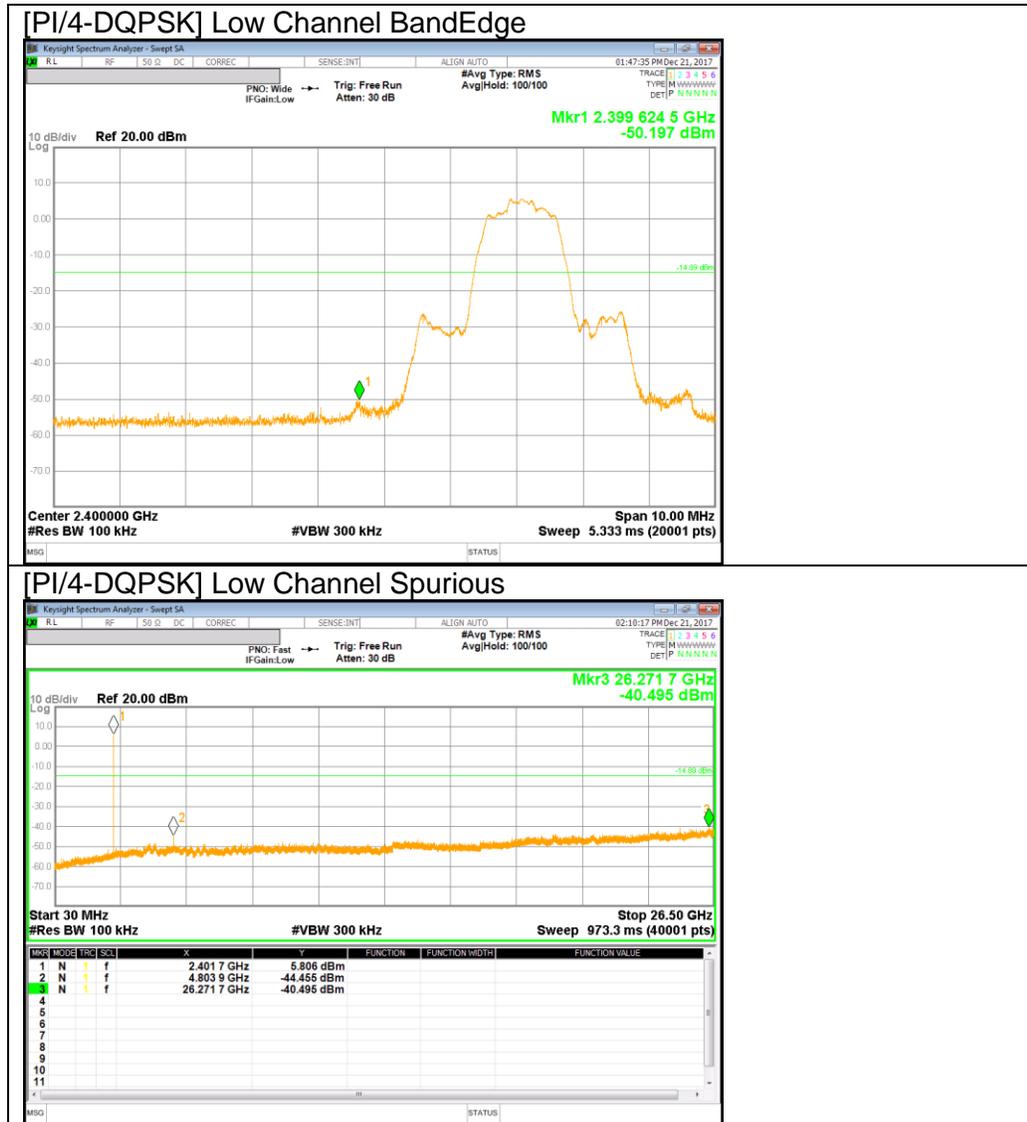


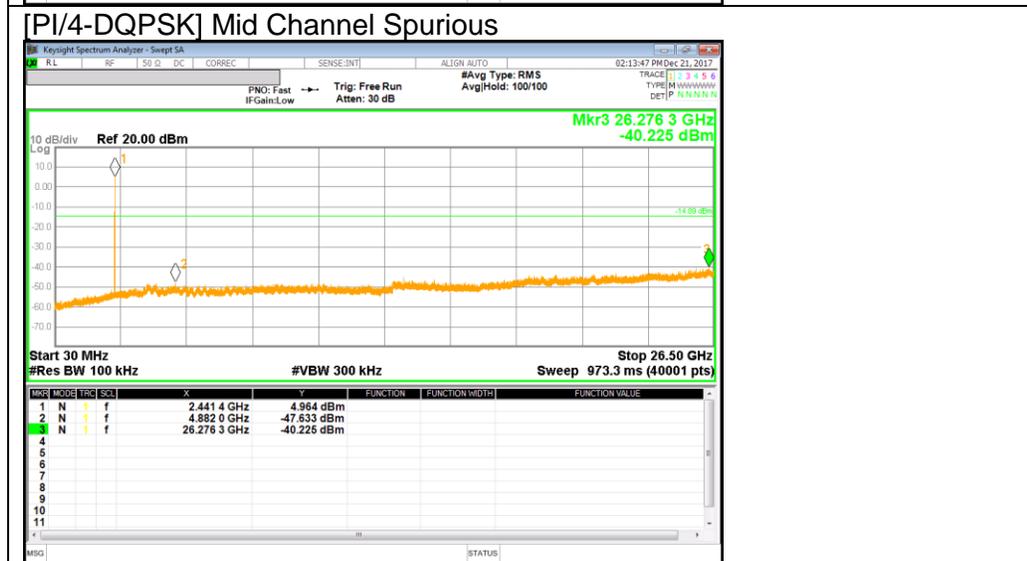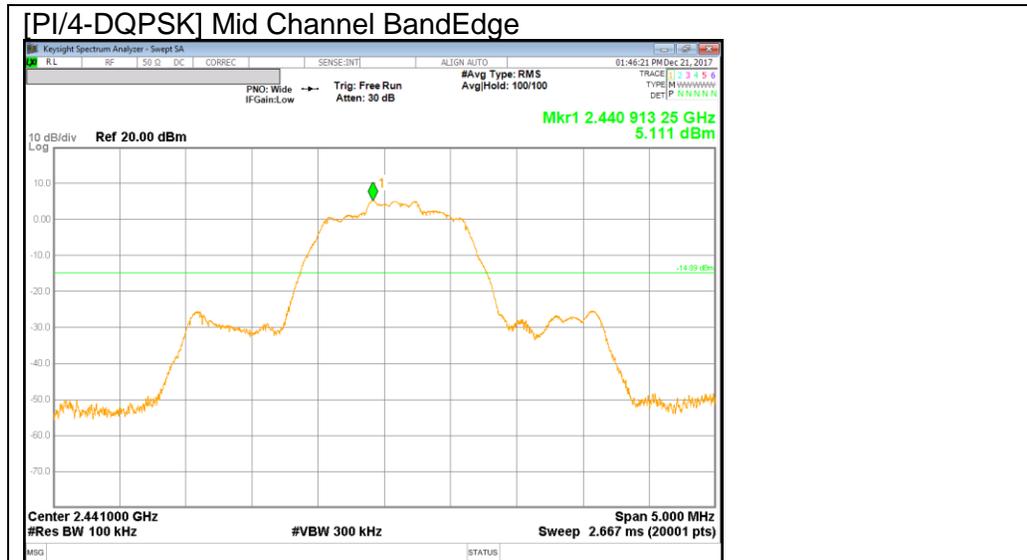

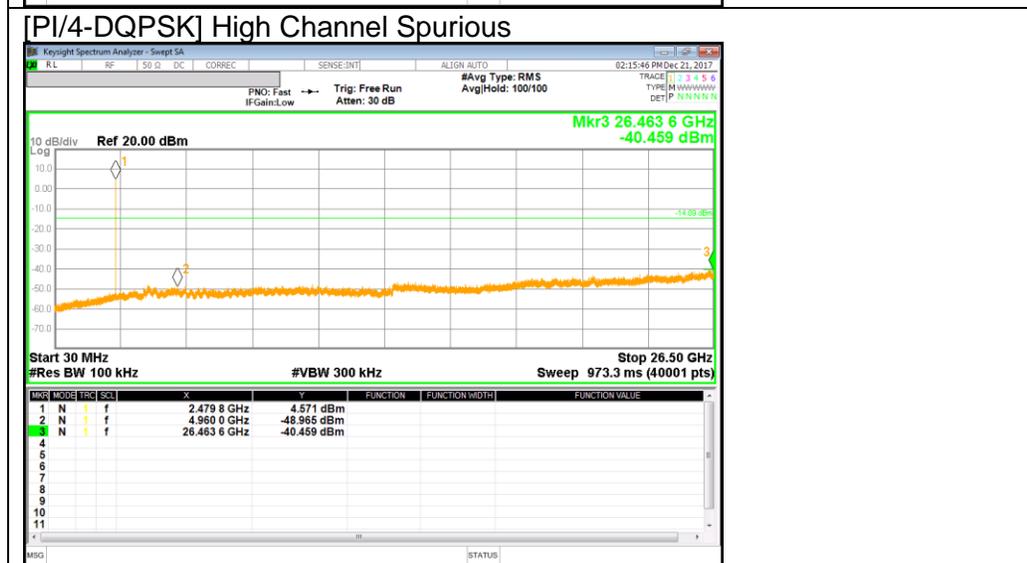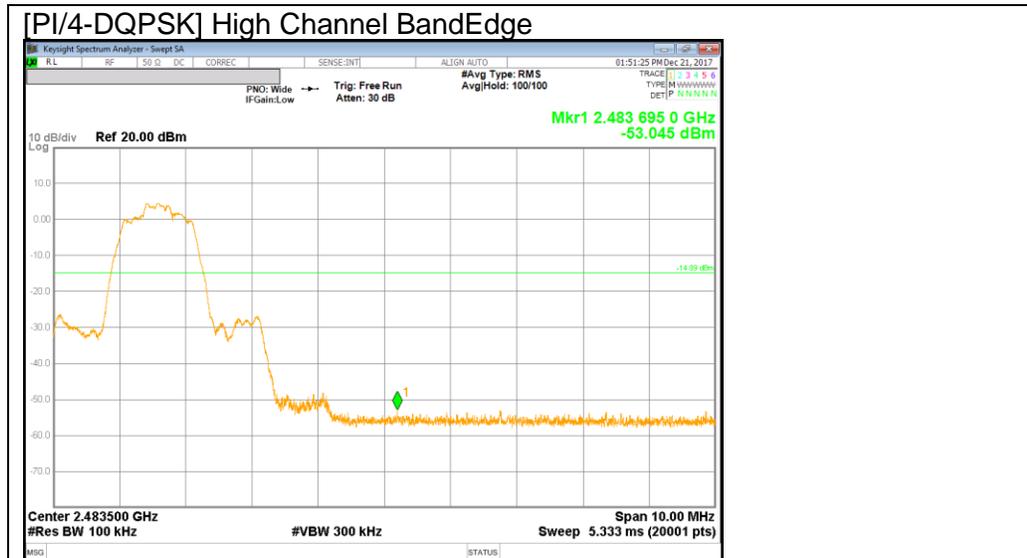

BandEdge Emission at PI/4-DQPSK Hopping Mode


[PI/4-DQPSK Hopping Mode] Low Channel BandEdge


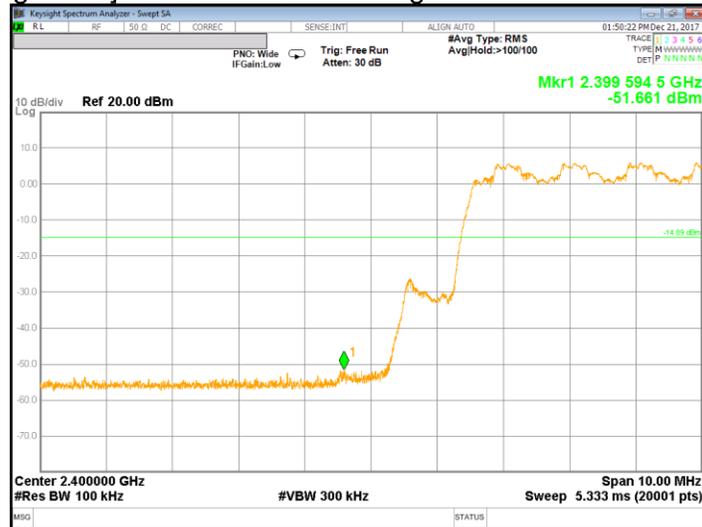




[PI/4-DQPSK Hopping Mode] High Channel BandEdge



8PSK Mode

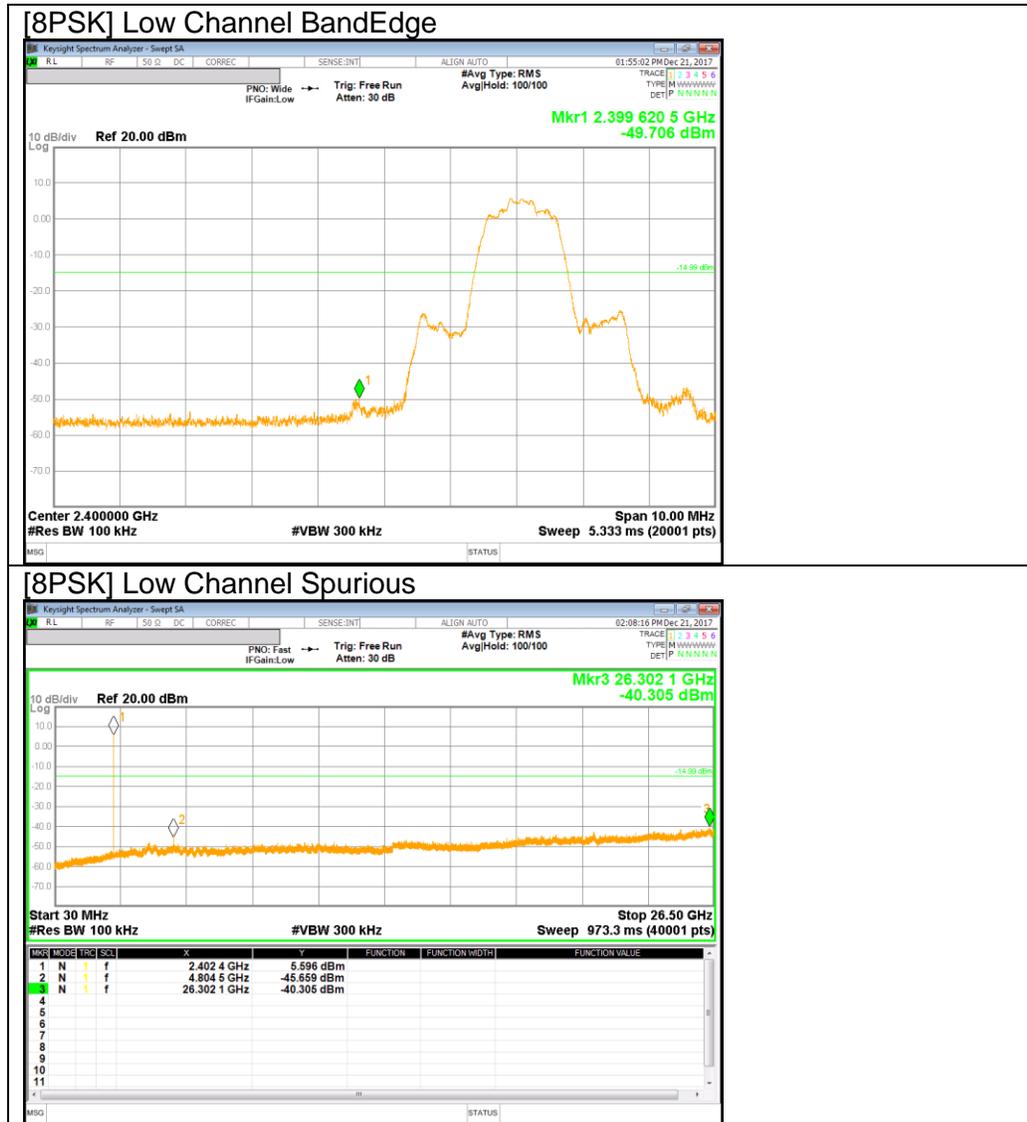

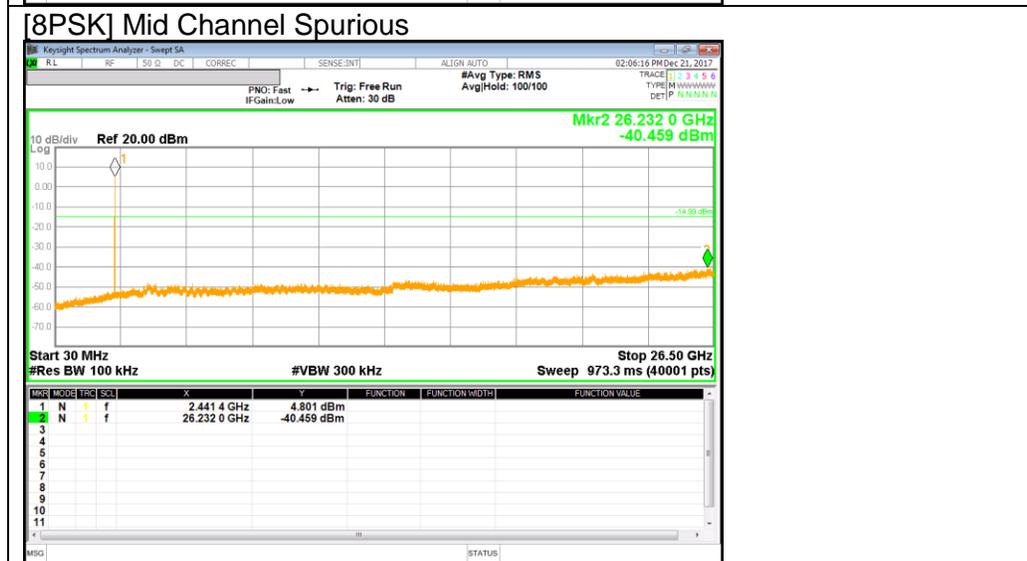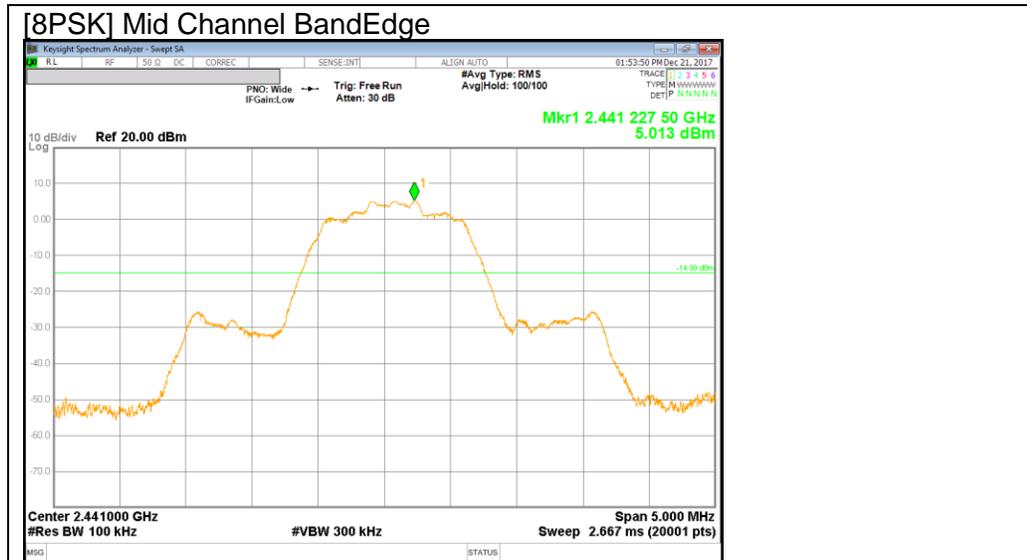

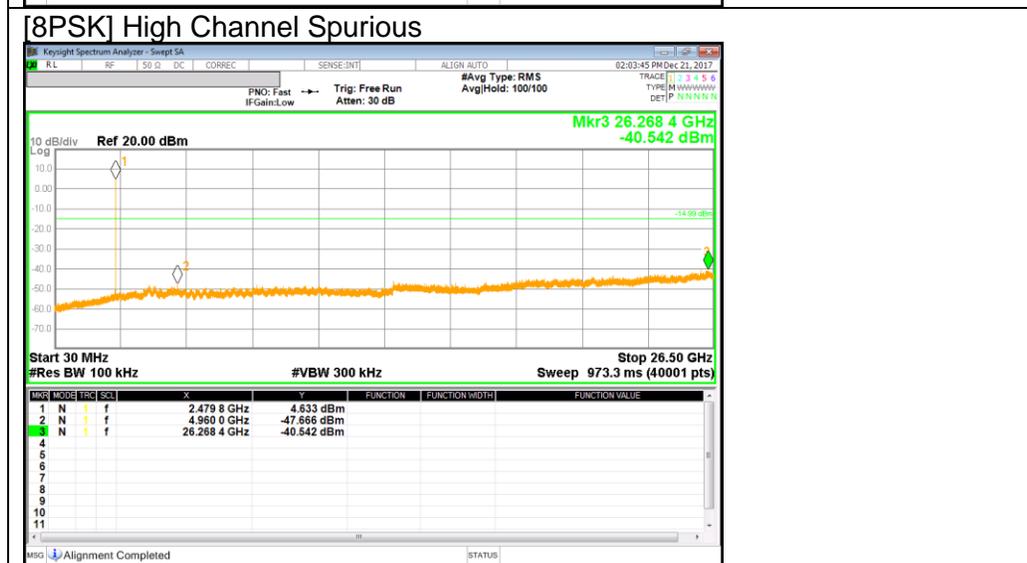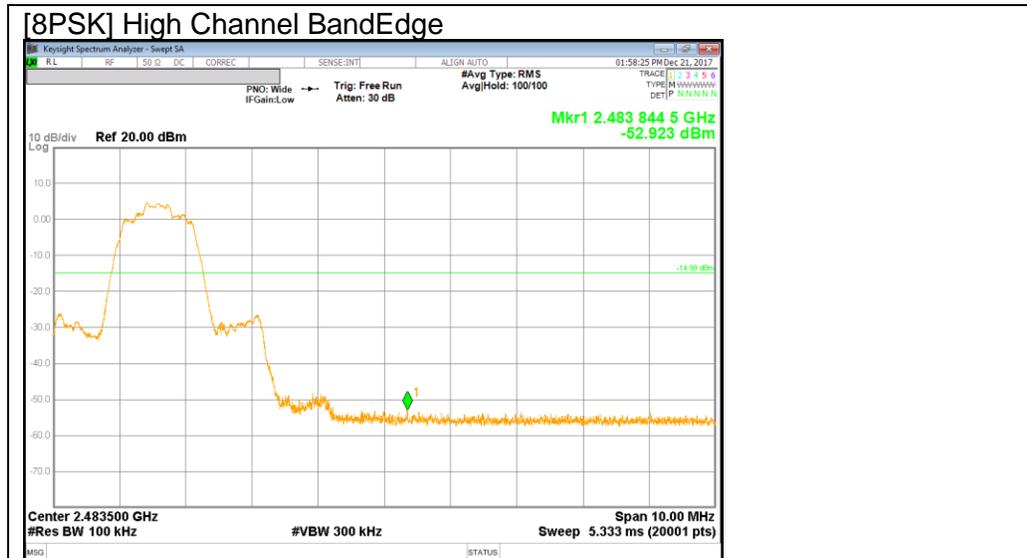


BandEdge Emission at 8PSK Hopping Mode

[8PSK Hopping Mode] Low Channel BandEdge



[8PSK Hopping Mode] High Channel BandEdge

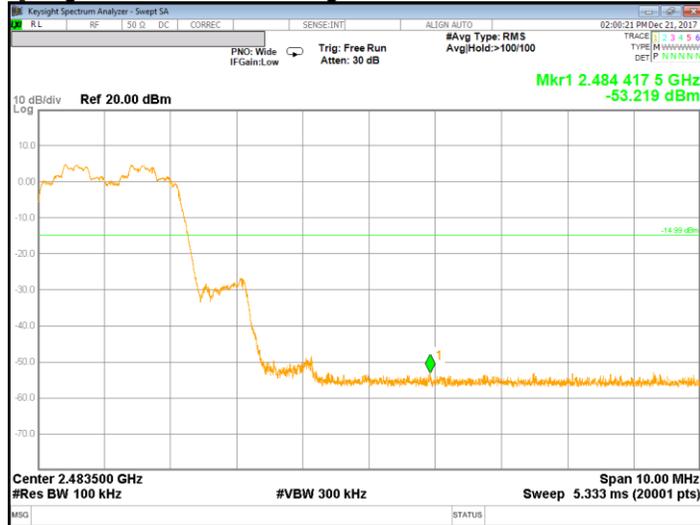

10. RADIATED TEST RESULTS

10.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.0029\text{S} = 350\text{Hz}.$$

The minimum VBW was 350Hz, but test receiver(ESU40) couldn't set value 350Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

10.2. TRANSMITTER ABOVE 1 GHz

10.2.1. BASIC DATA RATE GFSK MODULATION

RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

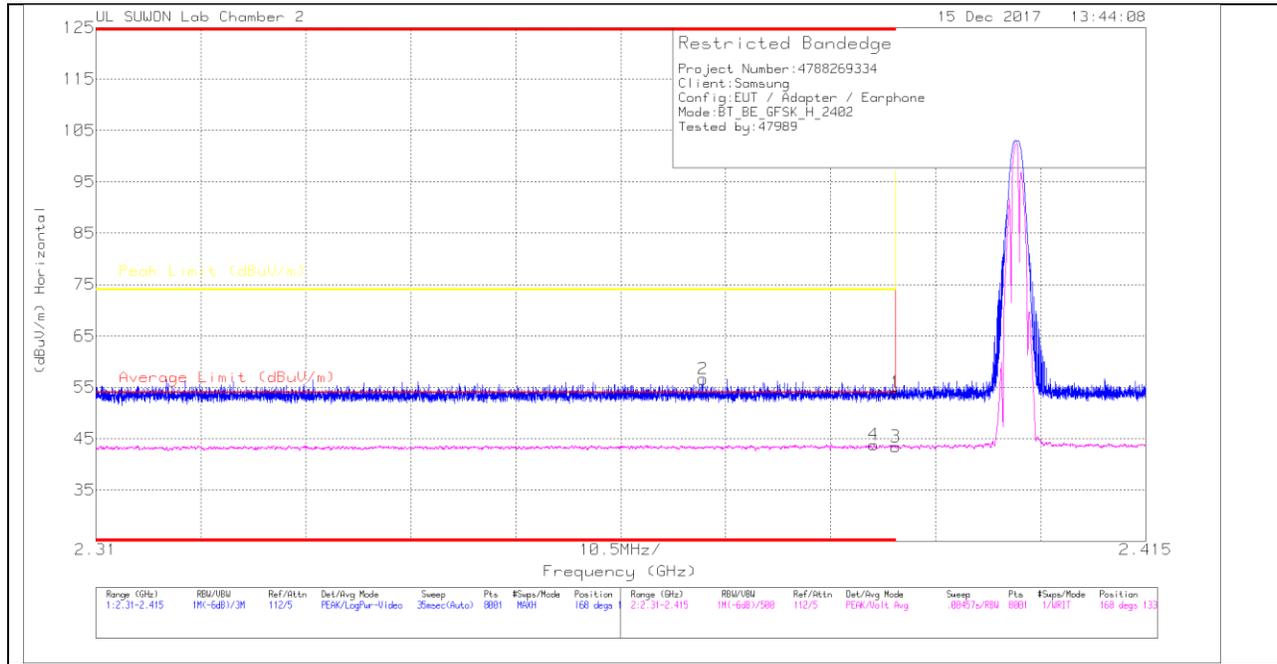

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.93	Pk	31.3	-18.2	54.03	-	-	74	-19.97	168	133	H
2	* 2.371	43.75	Pk	31.2	-18.3	56.65	-	-	74	-17.35	168	133	H
3	* 2.39	30.37	VA1T	31.3	-18.2	43.47	54	-10.53	-	-	168	133	H
4	* 2.388	30.74	VA1T	31.3	-18.2	43.84	54	-10.16	-	-	168	133	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/T_{on}$ where: T_{on} is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

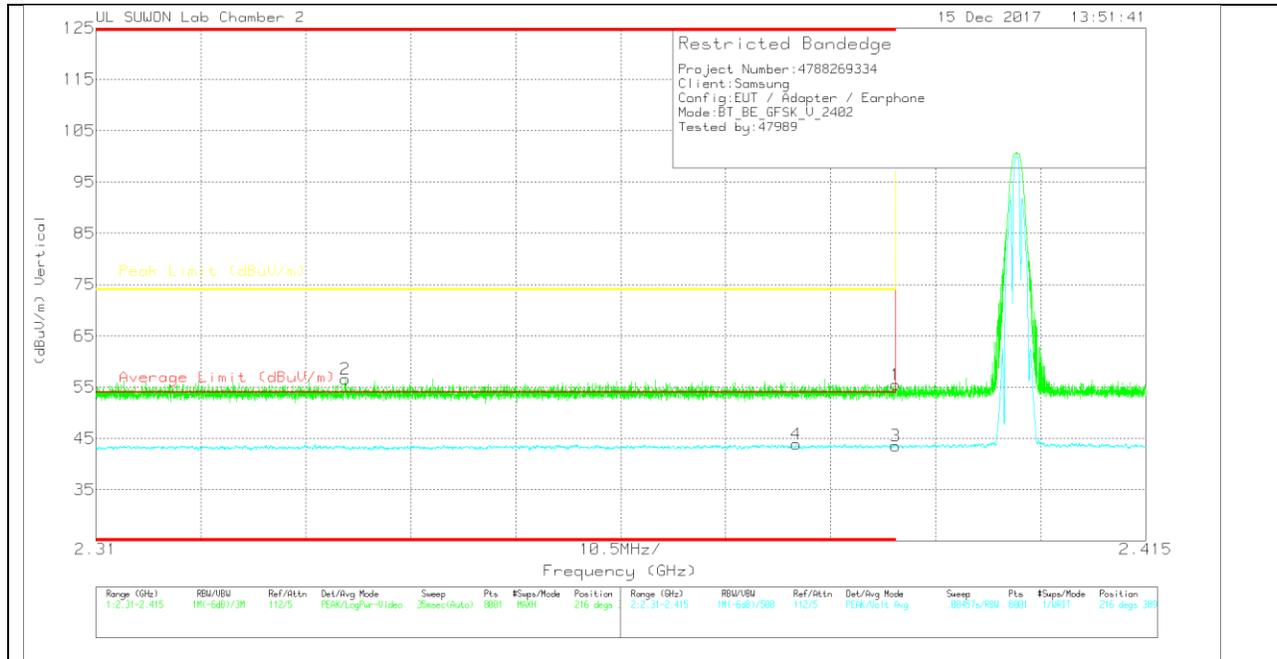

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117(0016 8724)	10dB(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.34	Pk	31.3	-18.2	55.44	-	-	74	-18.56	216	389	V
2	* 2.335	43.77	Pk	31.2	-18.4	56.57	-	-	74	-17.43	216	389	V
3	* 2.39	30.46	VA1T	31.3	-18.2	43.56	54	-10.44	-	-	216	389	V
4	* 2.38	30.88	VA1T	31.3	-18.3	43.88	54	-10.12	-	-	216	389	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $VB=1/Ton$ where: Ton is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

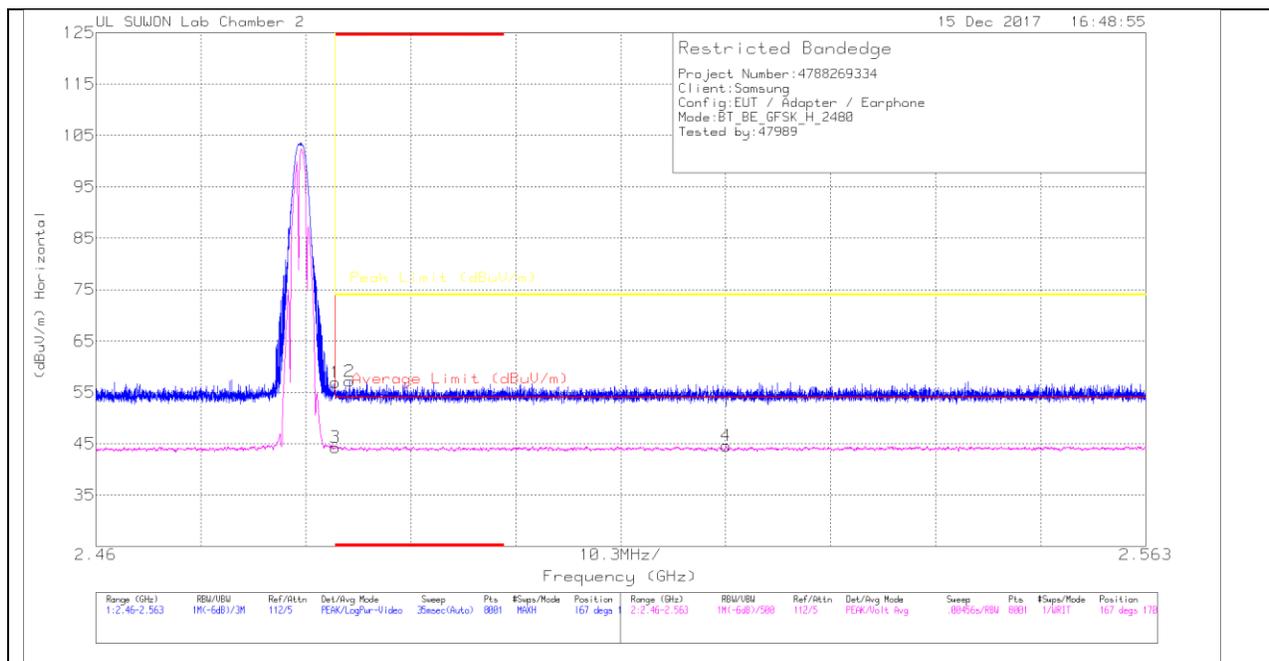

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	43.31	Pk		-18	56.91	-	-	74	-17.09	167	170	H
2	* 2.485	43.59	Pk		-18	57.19	-	-	74	-16.81	167	170	H
3	* 2.484	30.71	VA1T		-18	44.31	54	-9.69	-	-	167	170	H
4	2.522	30.99	VA1T		-18	44.59	54	-9.41	-	-	167	170	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

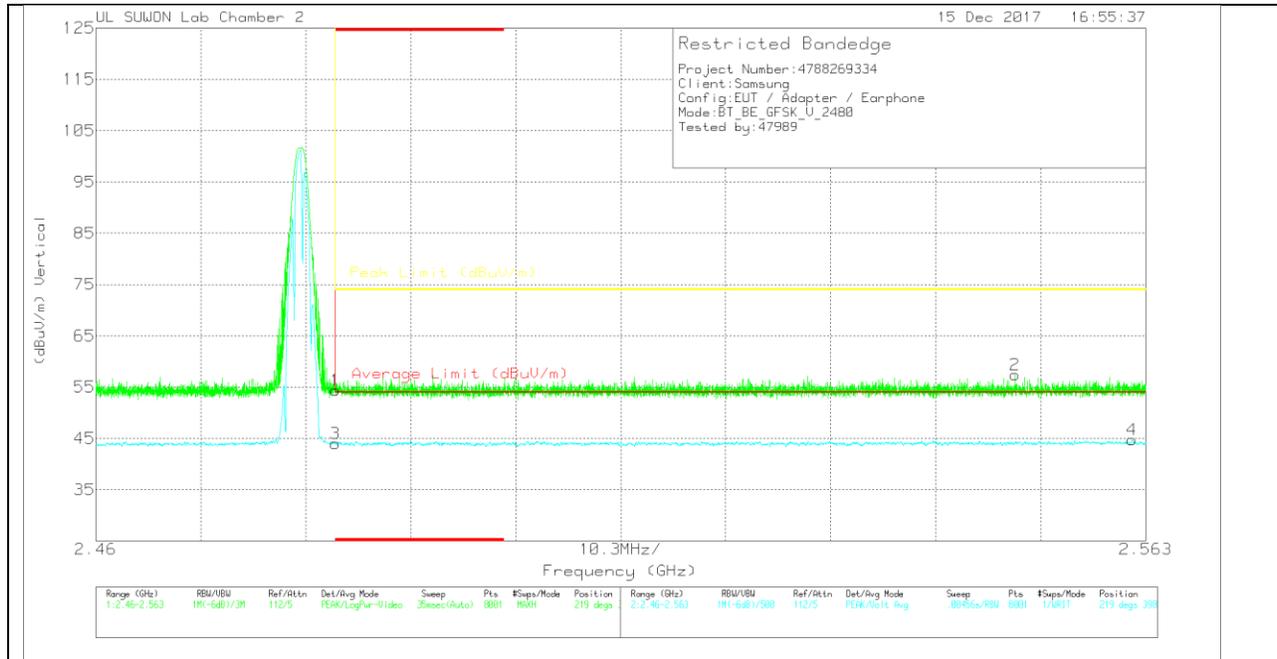

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	40.75	Pk		-18	54.35	-	-	74	-19.65	219	398	V
2	2.55	43.73	Pk		-18	57.43	-	-	74	-16.57	219	398	V
3	* 2.484	30.42	VA1T		-18	44.02	54	-9.98	-	-	219	398	V
4	2.562	31.03	VA1T		-18	44.73	54	-9.27	-	-	219	398	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector


VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

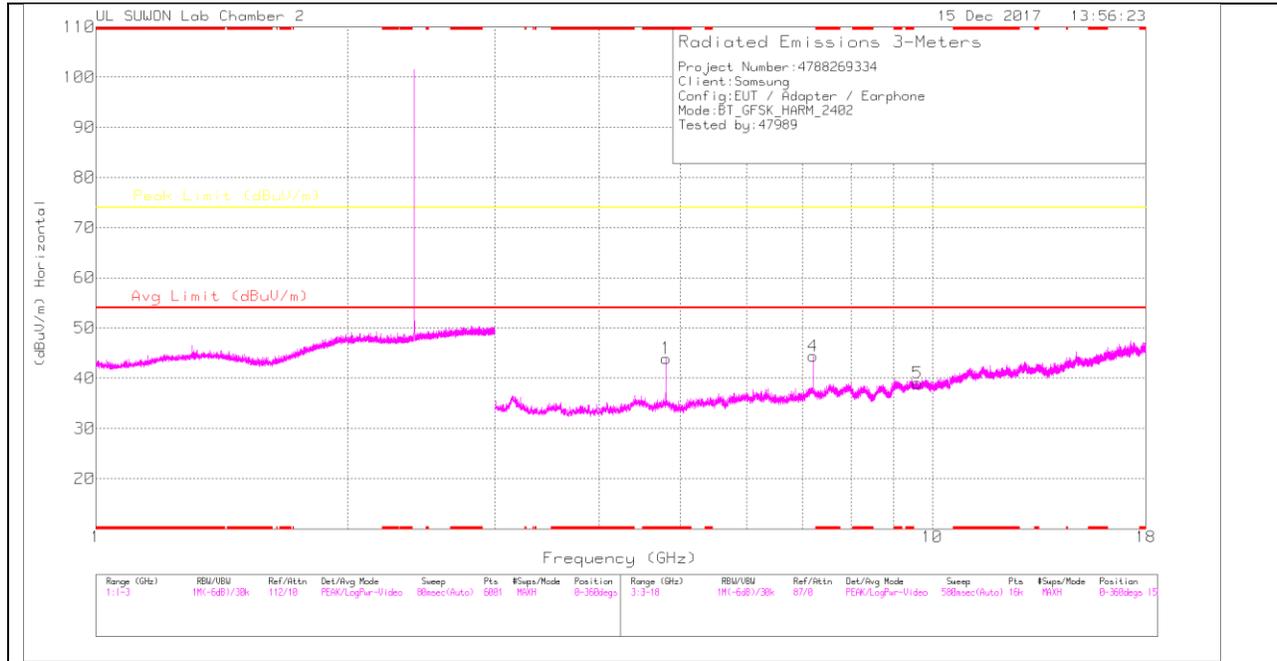

LOW CHANNEL VERTICAL

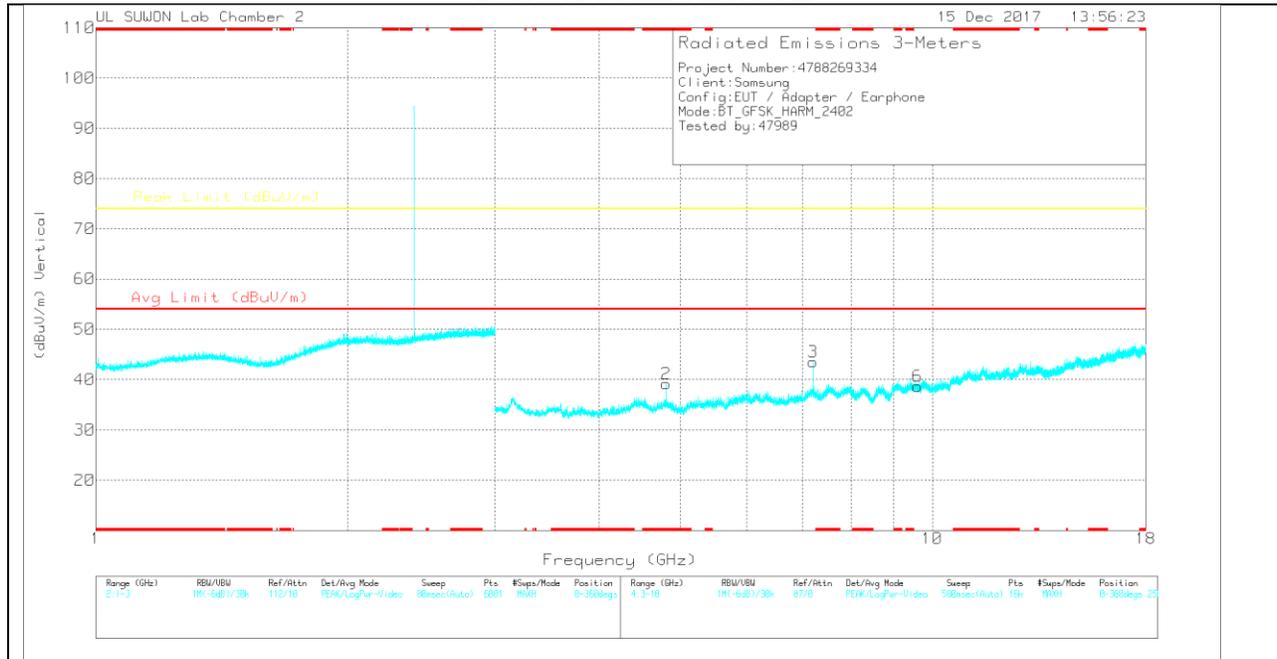

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.804	34.45	PK	33.8	-24.3	43.95	-	-	74	-30.05	0-360	150	H
4	7.206	30.2	PK	35.9	-21.7	44.4	-	-	74	-29.6	0-360	150	H
5	9.603	20.71	PK	36.7	-18.4	39.01	-	-	74	-34.99	0-360	150	H
2	* 4.804	29.66	PK	33.8	-24.3	39.16	-	-	74	-34.84	0-360	250	V
3	7.205	29.31	PK	35.9	-21.7	43.51	-	-	74	-30.49	0-360	250	V
6	9.605	20.37	PK	36.7	-18.4	38.67	-	-	74	-35.33	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[001 68724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	38.61	PKFH	33.8	-24.3	48.11	-	-	74	-25.89	144	110	H
* 4.804	32.11	VA1T	33.8	-24.3	41.61	54	-12.39	-	-	144	110	H
* 4.804	38.05	PKFH	33.8	-24.3	47.55	-	-	74	-26.45	313	301	V
* 4.804	29.5	VA1T	33.8	-24.3	39	54	-15	-	-	313	301	V
7.206	36.48	PKFH	35.9	-21.7	50.68	-	-	74	-23.32	216	128	V
7.207	36.87	PKFH	35.9	-21.7	51.07	-	-	74	-22.93	153	131	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

MID CHANNEL HORIZONTAL

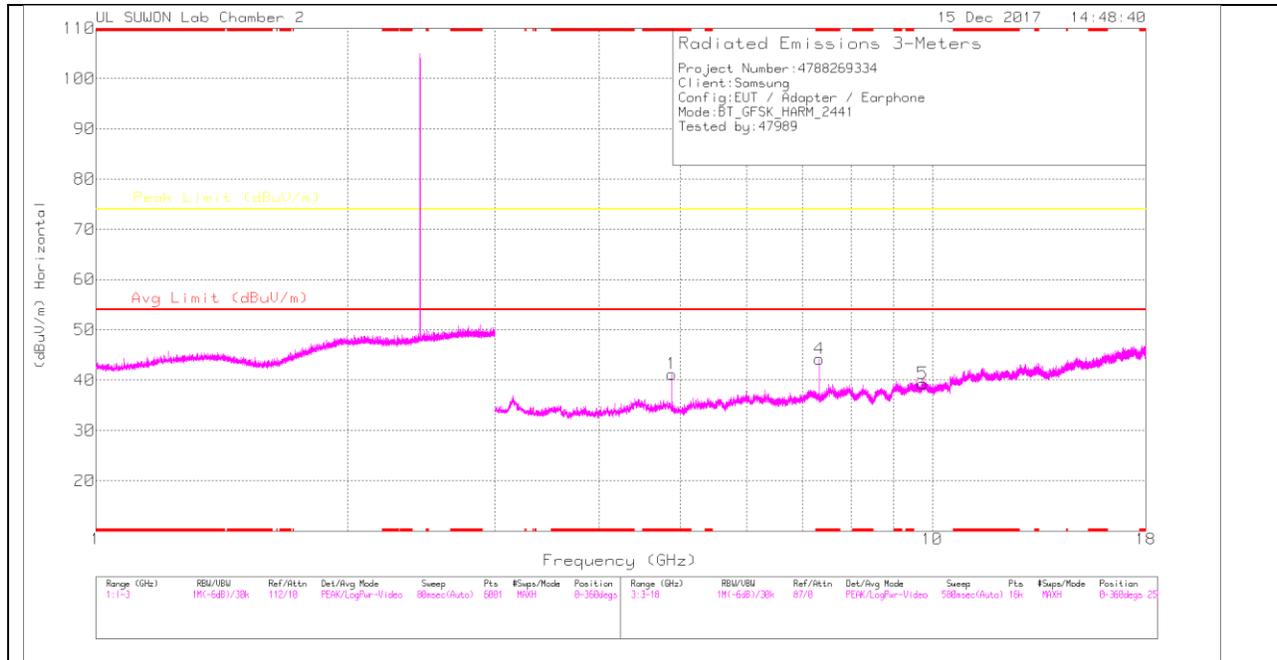

MID CHANNEL VERTICAL

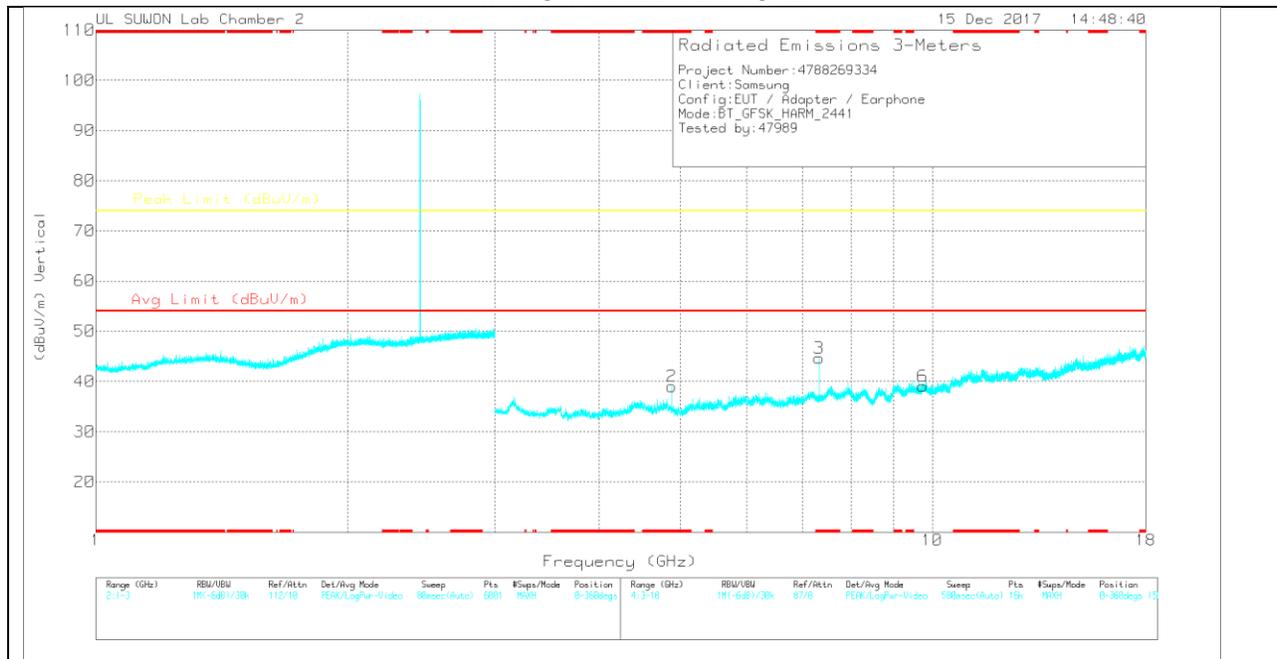

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.881	32.03	PK	33.8	-24.6	41.23	-	-	74	-32.77	0-360	150	H
4	* 7.323	30.22	PK	35.9	-21.9	44.22	-	-	74	-29.78	0-360	250	H
5	9.744	20.53	PK	36.9	-18.1	39.33	-	-	74	-34.67	0-360	150	H
2	* 4.881	29.81	PK	33.8	-24.6	39.01	-	-	74	-34.99	0-360	150	V
3	* 7.323	30.62	PK	35.9	-21.9	44.62	-	-	74	-29.38	0-360	250	V
6	9.742	20.25	PK	36.9	-18.1	39.05	-	-	74	-34.95	0-360	250	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[001 68724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.882	39.16	PKFH	33.8	-24.6	48.36	-	-	74	-25.64	49	161	H
* 4.882	32.34	VA1T	33.8	-24.6	41.54	54	-12.46	-	-	49	161	H
* 4.882	36.64	PKFH	33.8	-24.6	45.84	-	-	74	-28.16	360	113	V
* 4.882	28.75	VA1T	33.8	-24.6	37.95	54	-16.05	-	-	360	113	V
* 7.323	36.82	PKFH	35.9	-21.9	50.82	-	-	74	-23.18	351	324	V
* 7.323	29.26	VA1T	35.9	-21.9	43.26	54	-10.74	-	-	351	324	V
* 7.324	36.51	PKFH	35.9	-21.9	50.51	-	-	74	-23.49	154	150	H
* 7.323	28.77	VA1T	35.9	-21.9	42.77	54	-11.23	-	-	154	150	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

HIGH CHANNEL HORIZONTAL

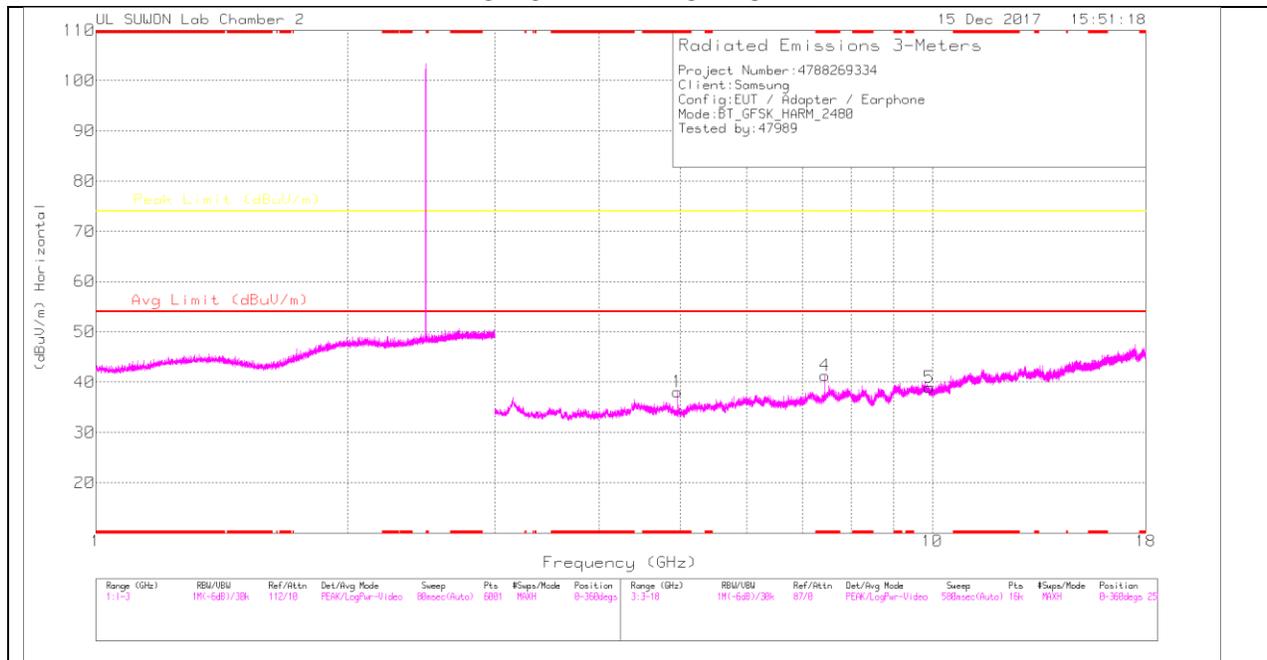

HIGH CHANNEL VERTICAL

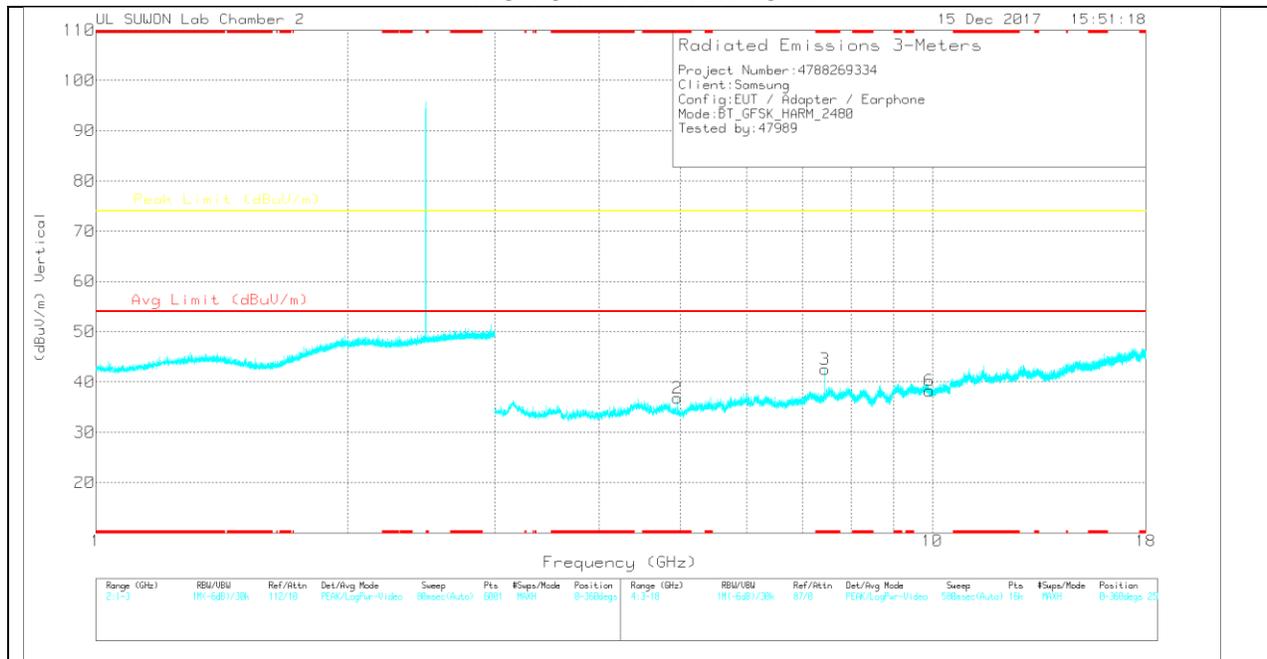

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.96	28.98	PK	33.8	-24.7	38.08	-	-	74	-35.92	0-360	150	H
4	* 7.44	26.44	PK	35.9	-21	41.34	-	-	74	-32.66	0-360	150	H
5	9.921	19.84	PK	37.1	-18	38.94	-	-	74	-35.06	0-360	250	H
2	* 4.96	27.68	PK	33.8	-24.7	36.78	-	-	74	-37.22	0-360	150	V
3	* 7.441	27.63	PK	35.9	-21	42.53	-	-	74	-31.47	0-360	250	V
6	9.923	19.16	PK	37.1	-18	38.26	-	-	74	-35.74	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[001 68724]	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.96	35.95	PKFH	33.8	-24.7	45.05	-	-	74	-28.95	139	131	H
* 4.96	28.55	VA1T	33.8	-24.7	37.65	54	-16.35	-	-	139	131	H
* 4.96	35.17	PKFH	33.8	-24.7	44.27	-	-	74	-29.73	343	108	V
* 4.96	24.94	VA1T	33.8	-24.7	34.04	54	-19.96	-	-	343	108	V
* 7.441	34.98	PKFH	35.9	-21	49.88	-	-	74	-24.12	342	331	V
* 7.44	25.87	VA1T	35.9	-21	40.77	54	-13.23	-	-	342	331	V
* 7.441	34.44	PKFH	35.9	-21	49.34	-	-	74	-24.66	53	185	H
* 7.44	25.3	VA1T	35.9	-21	40.2	54	-13.8	-	-	53	185	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PKFH - FHSS: RB=100k/1MHz VB=3 x RB, Peak
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

10.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

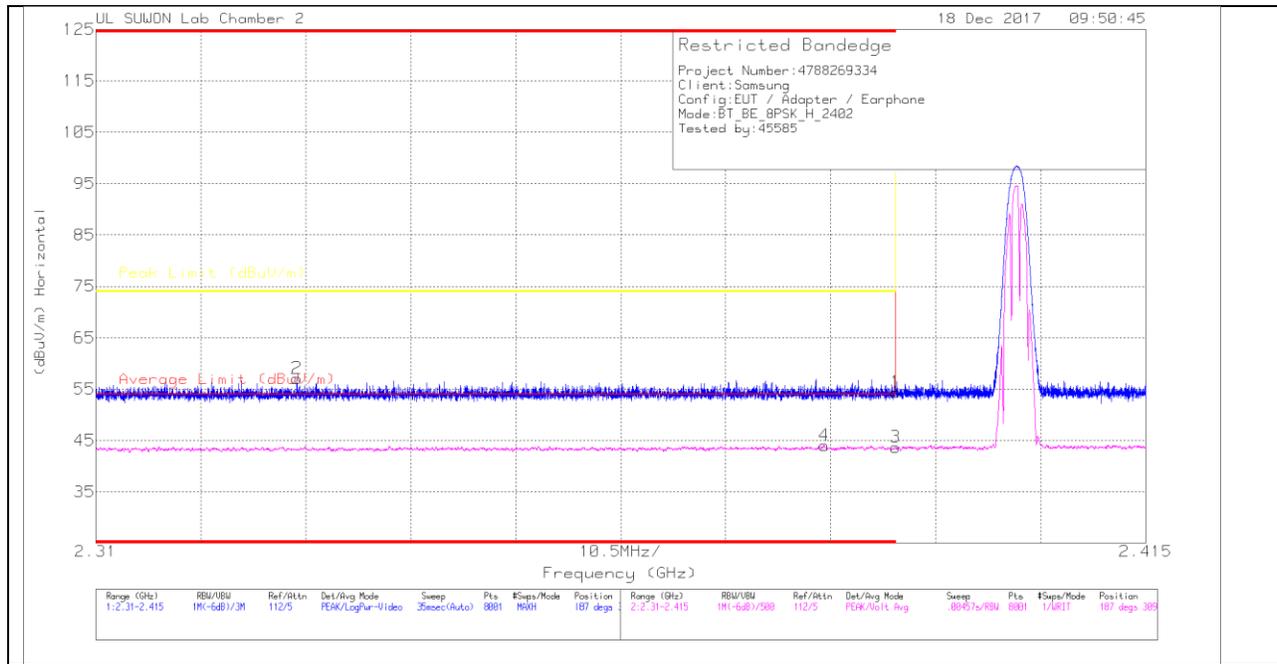

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.32	Pk	31.3	-18.2	54.42	-	-	74	-19.58	187	309	H
2	* 2.33	44.3	Pk	31.2	-18.4	57.1	-	-	74	-16.9	187	309	H
3	* 2.39	30.63	VA1T	31.3	-18.2	43.73	54	-10.27	-	-	187	309	H
4	* 2.383	30.95	VA1T	31.3	-18.2	44.05	54	-9.95	-	-	187	309	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

VERTICAL PEAK AND AVERAGE PLOT

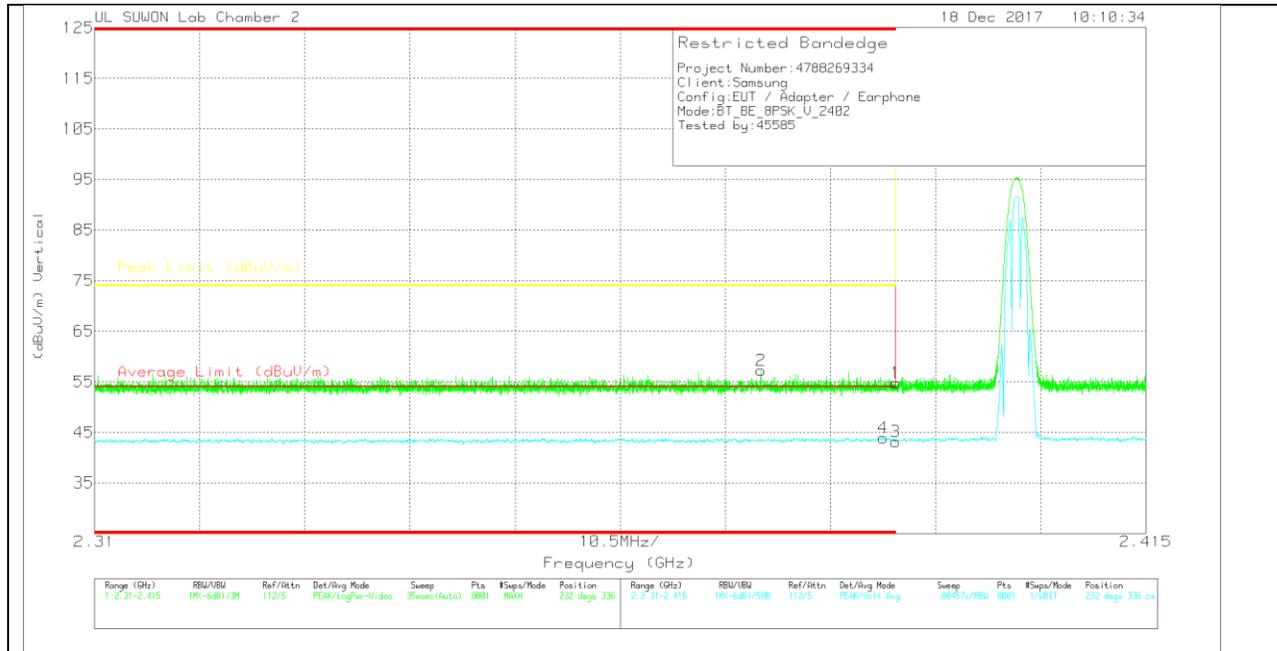

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	41.65	Pk		-18.2	54.75	-	-	74	-19.25	232	336	V
2	* 2.377	44.28	Pk		-18.3	57.28	-	-	74	-16.72	232	336	V
3	* 2.39	30.06	VA1T		-18.2	43.16	54	-10.84	-	-	232	336	V
4	* 2.389	30.83	VA1T		-18.2	43.93	54	-10.07	-	-	232	336	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average $V_B=1/T_{on}$ where: T_{on} is transmit duration

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

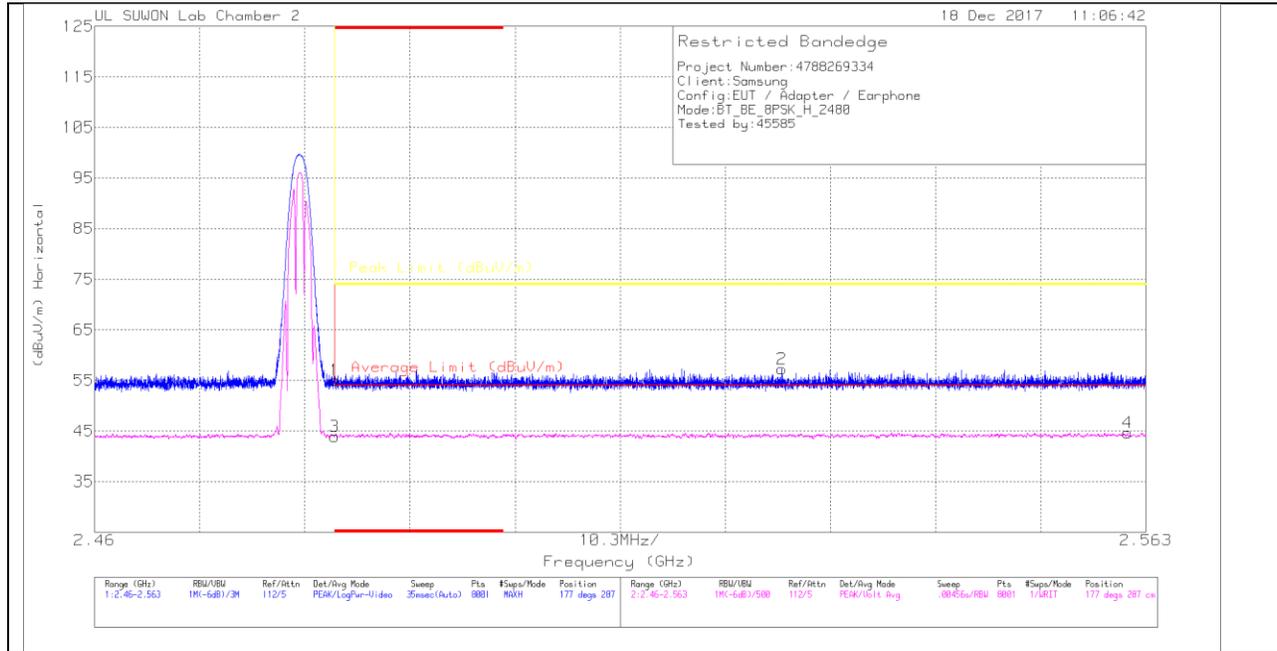

HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[0016 8724]	10dB(dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.44	Pk	31.6	-18	55.04	-	-	74	-18.96	177	287	H
2	2.527	43.57	Pk	31.7	-18	57.27	-	-	74	-16.73	177	287	H
3	* 2.484	30.35	VA1T	31.6	-18	43.95	54	-10.05	-	-	177	287	H
4	2.561	30.9	VA1T	31.7	-18	44.6	54	-9.4	-	-	177	287	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration