



FCC CFR47 PART 15 SUBPART C

ANT+

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC

MODEL NUMBER : SM-G611S, SM-G611K, SM-G611L

FCC ID: A3LSMG611KOR

REPORT NUMBER: 4788269334-E4V3

ISSUE DATE: JAN 10, 2018

Prepared for
SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Prepared by
UL Korea, Ltd.
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16675, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	01/04/18	Initial issue	Junwhan Lee
V2	01/05/18	Revised to address TCB's question	Junwhan Lee
V2	01/10/18	Revised to address TCB's question	Junwhan Lee

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM E-FIELD STRENGTH</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>WORST-CASE CONFIGURATION AND MODE</i>	6
5.5. <i>DESCRIPTION OF TEST SETUP</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. <i>99% BANDWIDTH</i>	10
7.2. <i>TRANSMITTER RADIATED EMISSIONS</i>	12
7.2.1. <i>DUTY CYCLE</i>	15
7.2.2. <i>FUNDAMENTAL FIELD STRENGTH LEVEL</i>	16
7.2.3. <i>TRANSMITTER RESTRICTED BAND EDGES</i>	22
7.2.4. <i>HARMONICS AND SPURIOUS EMISSIONS</i>	26
7.2.5. <i>SPURIOUS BELOW 1 GHz</i>	32
8. AC POWER LINE CONDUCTED EMISSIONS	34
9. SETUP PHOTOS	39

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC
MODEL NUMBER: SM-G611S, SM-G611K, SM-G611L
SERIAL NUMBER: R39JB04JBD, R39JB04JBP (RADIATED);
R39JB04JMRA (CONDUCTED)
DATE TESTED: DEC 22, 2017 - DEC 29, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:

Tested By:



SungGil Park
Suwon Lab Engineer
UL Korea, Ltd.

Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS b/g/n, ANT+ and NFC.
This test report addresses the ANT+ operational mode.

SM-G611S and SM-G611K/SM-G611L are same hardware and only difference is S/W user interface for different network operator. SM-G611S was used for the tests.

5.2. MAXIMUM E-FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range [MHz]	Mode	Peak E-field Strength [dBuV/m]	Avg E-field Strength [dBuV/m]	Distance [m]
2402 - 2480	ANT +	105.69	56.62	3.00

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an internal antenna, with a maximum gain of 0.91 dBi

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA50KWK	DW2J609DS/A -E	N/A
Data Cable	SAMSUNG	ECB-DU68WE	N/A	N/A
Earphone	SAMSUNG	EHS64AVFWE	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A

TEST SETUP

The EUT is set to continuously transmit in ANT + test mode.
 Test software in hidden menu exercised the EUT to enable ANT+ mode.

SETUP DIAGRAM FOR TESTS

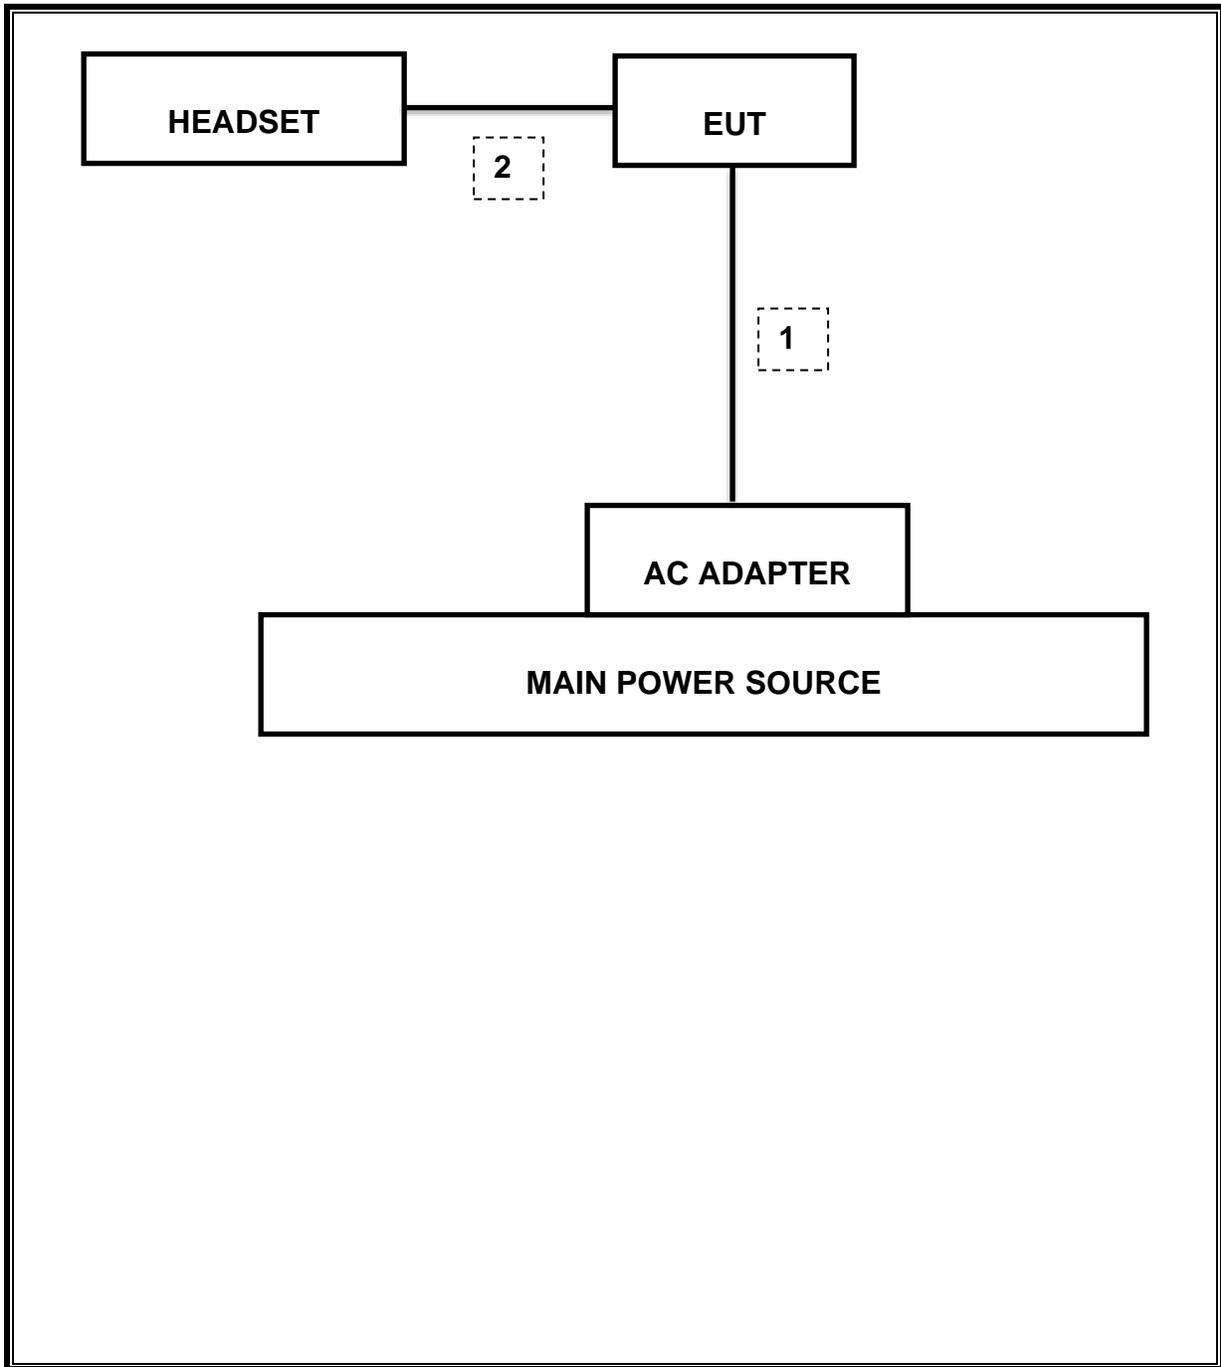

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-31-19
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3115	00161451	03-10-19
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19
Preamplifier	ETS	3116C-PA	00168841	11-13-19
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-09-18
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-18
Preamplifier	ETS	3115-PA	00167475	08-09-18
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-08-18
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-08-18
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-08-18
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-08-18
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-07-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-08-18
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-08-18
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-08-18
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-08-18
LISN	R&S	ENV-216	101837	08-09-18
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

7. LIMITS AND RESULTS

7.1. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency [MHz]	99% Bandwidth [MHz]	20 dB Bandwidth [MHz]
Low	2402	1.011	1.034
Mid	2441	1.012	1.034
High	2480	1.013	1.035
Worst		1.013	1.035

99% BANDWIDTH PLOTS


LOW CHANNEL

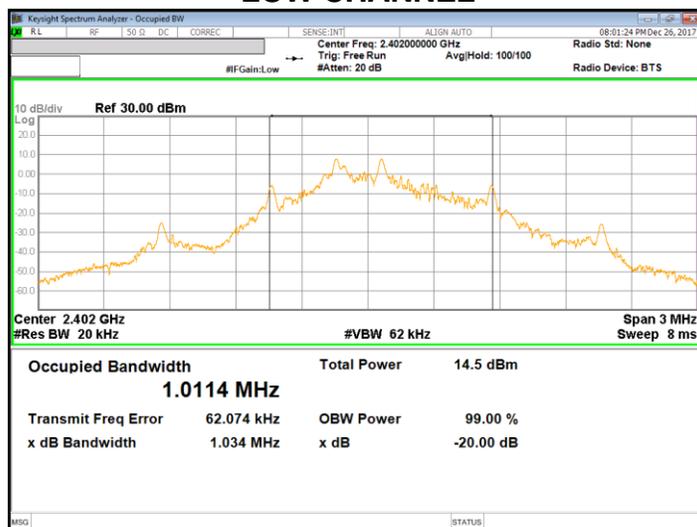

MID CHANNEL



HIGH CHANNEL

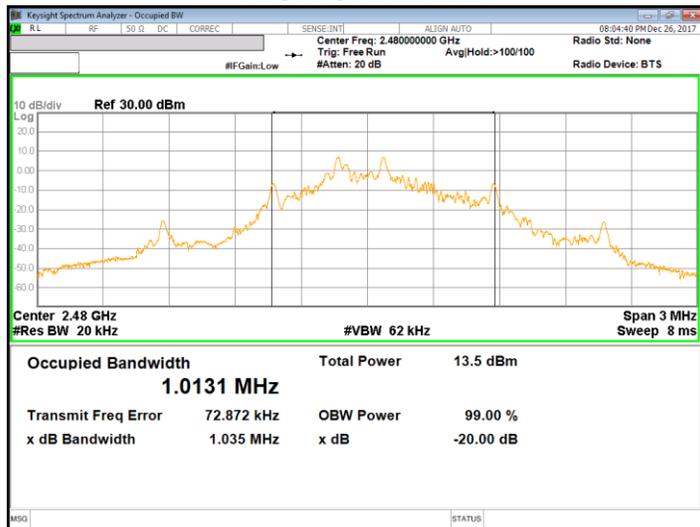

7.2. TRANSMITTER RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.10: 2013

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements.

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

LIMIT

FCC §15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).
Per FCC part 15.31(o), test results were not reported.

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (μV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.


RESULTS

7.2.1. DUTY CYCLE

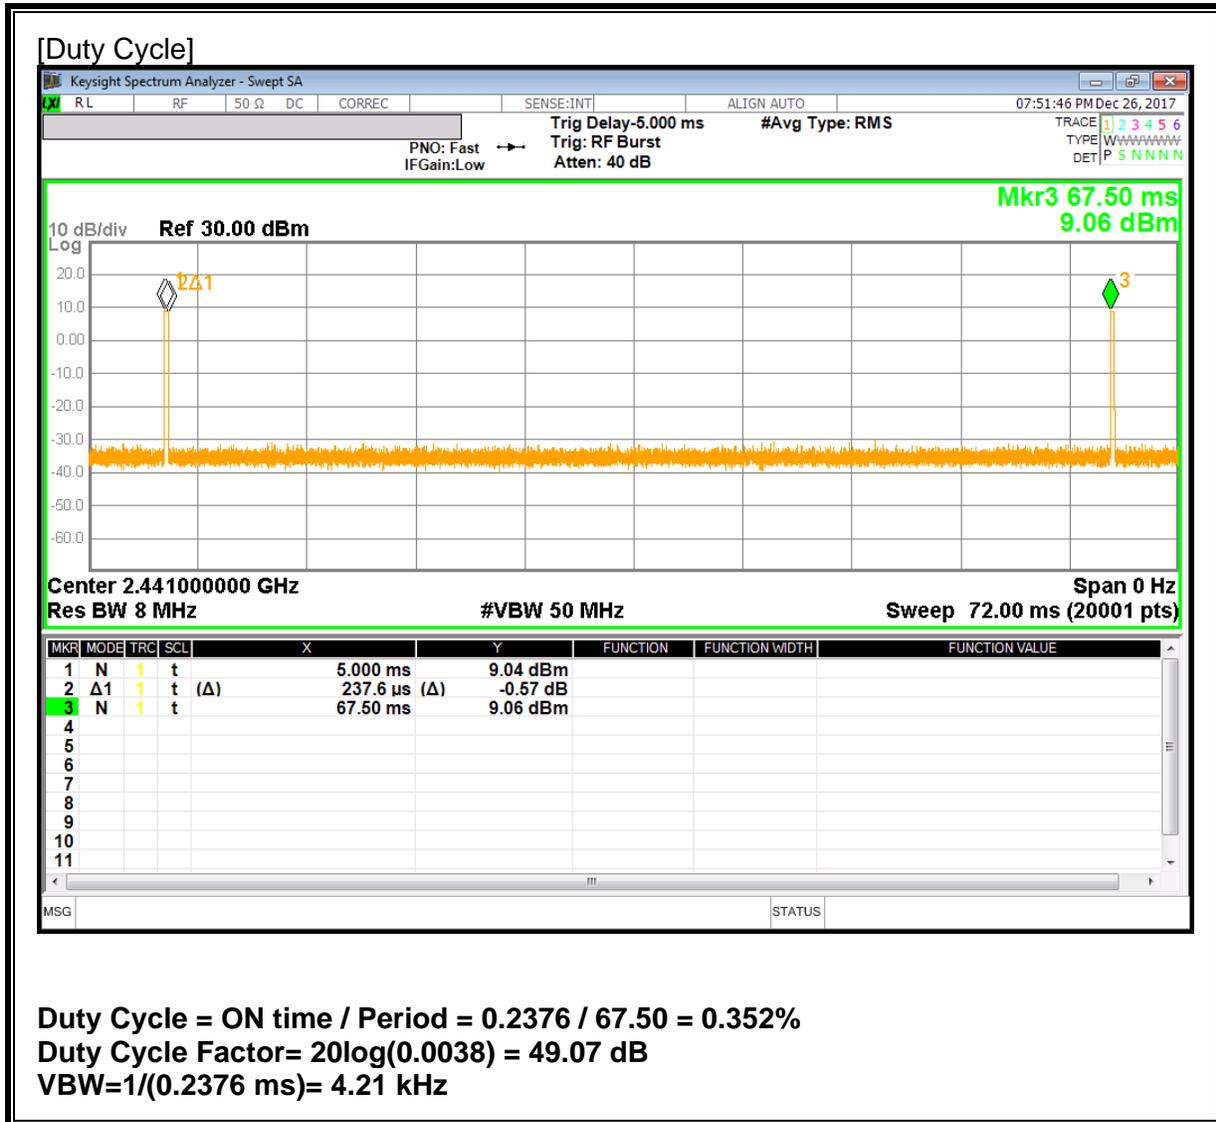

7.2.2. FUNDAMENTAL FIELD STRENGTH LEVEL

LOW CHANNEL, HORIZONTAL

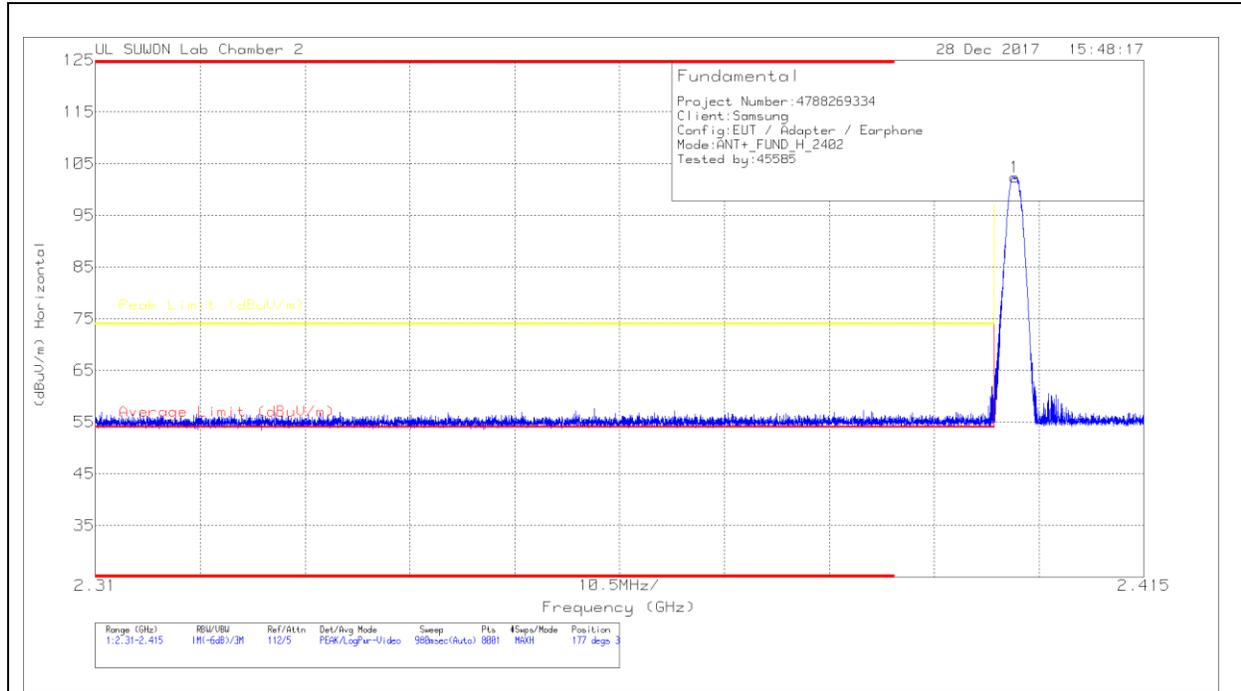

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.402	89.24	Pk		-18.2	102.34	-	-	114	11.66	177	396	H

Pk - Peak detector


* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 102.34 – 49.07 = 53.27 dBuV/m

LOW CHANNEL, VERTICAL

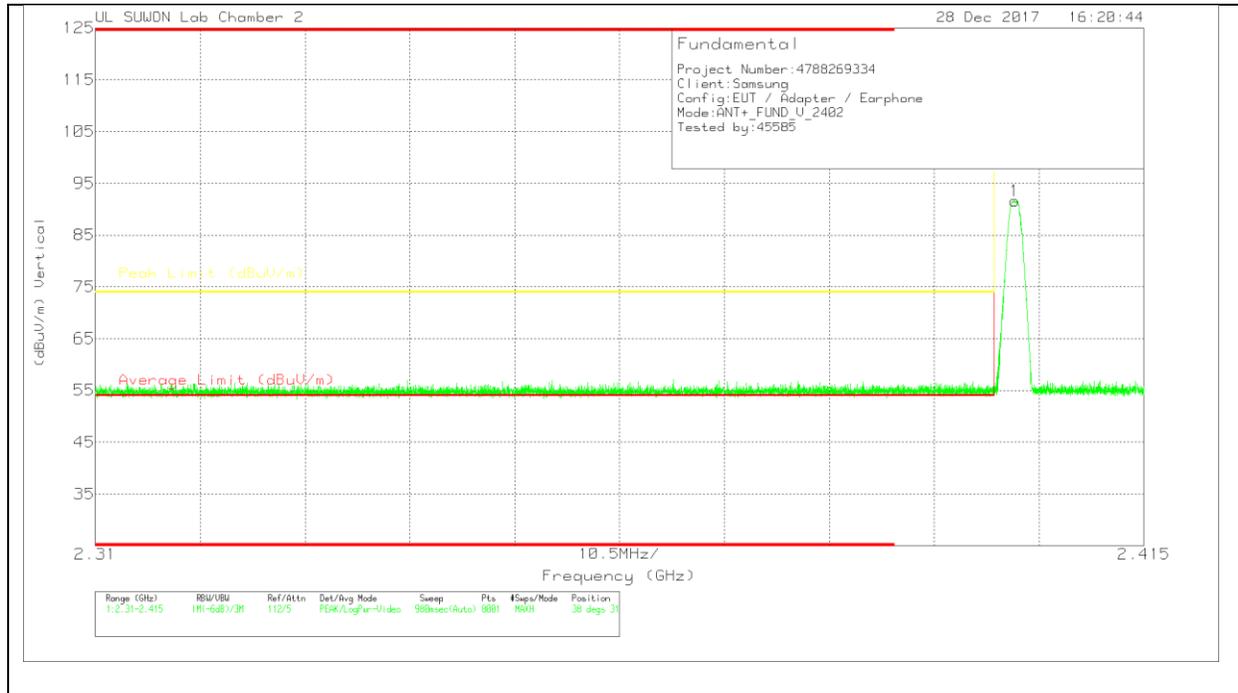

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.402	78.51	Pk		-18.2	91.61	-	-	114	22.39	38	319	V

Pk - Peak detector


* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 91.61 – 49.07 = 42.54 dBuV/m

MID CHANNEL, HORIZONTAL

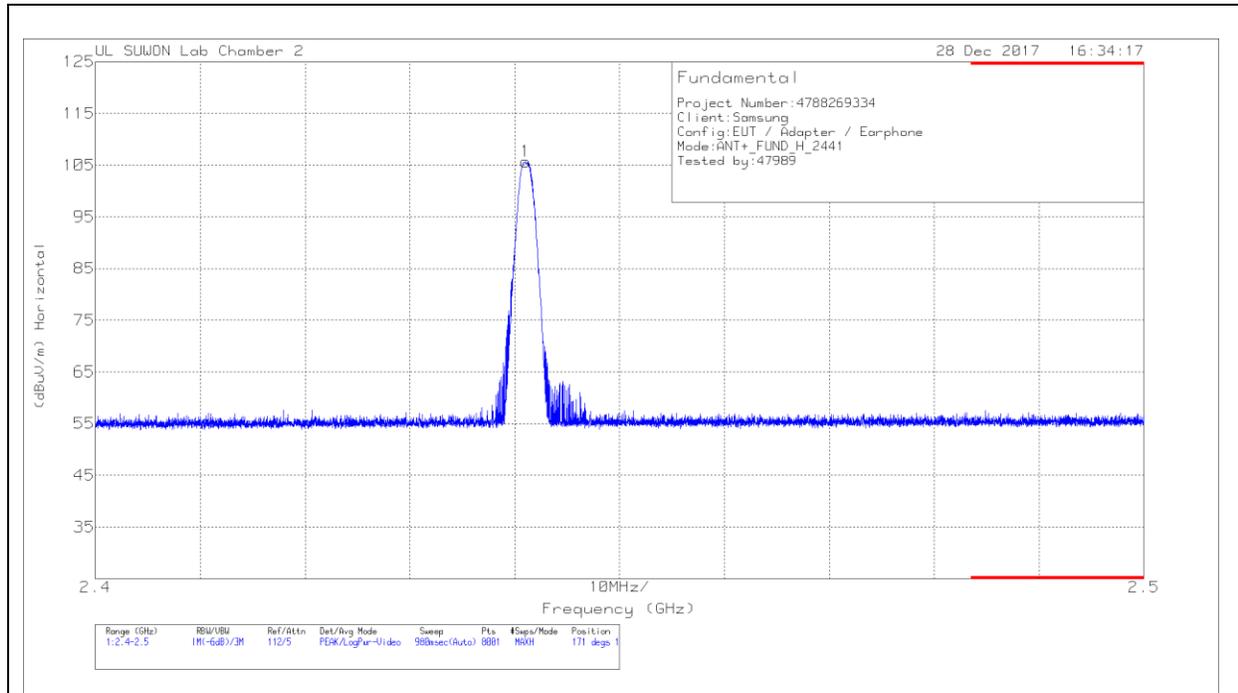

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168724]	10dB[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	92.29	Pk	31.5	-18.1	105.69	114	8.31	171	131	H

Pk - Peak detector


* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 105.69 – 49.07 = 56.62 dBuV/m

MID CHANNEL, VERTICAL

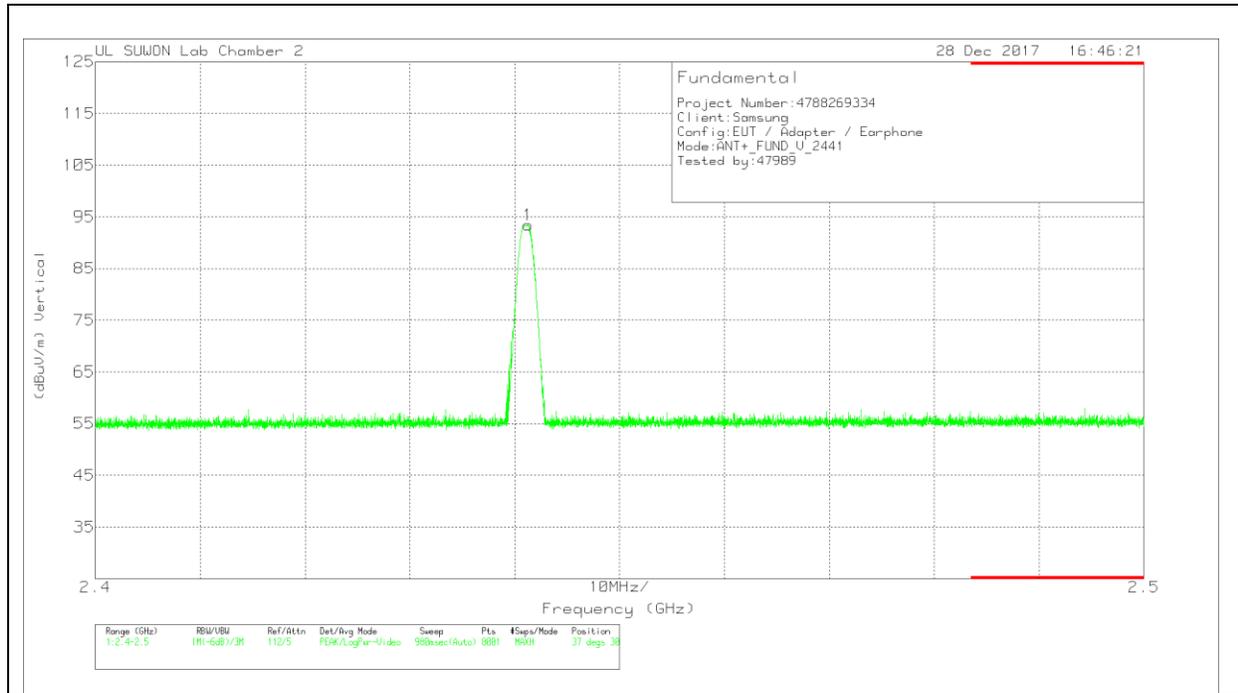

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168724]	10dB[dB]	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.441	79.98	Pk	31.5	-18.1	93.38	114	20.62	37	308	V

Pk - Peak detector


* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 93.38 – 49.07 = 44.31 dBuV/m

HIGH CHANNEL, HORIZONTAL

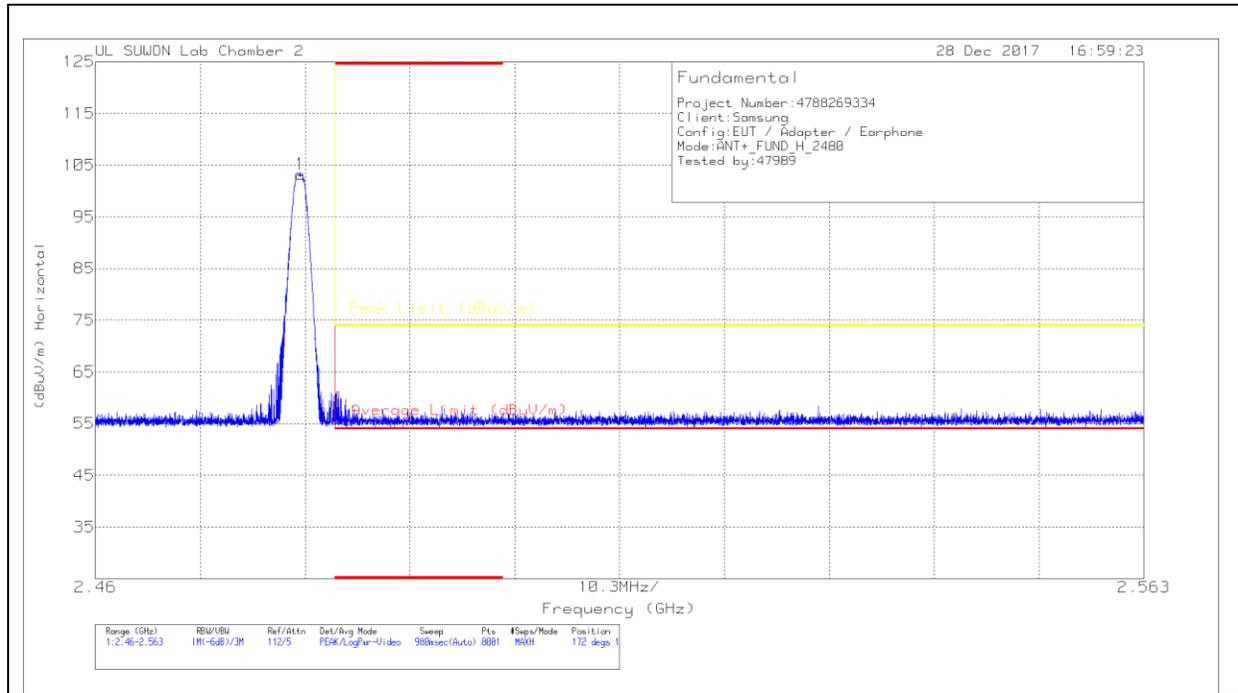

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48	89.63	Pk		-18	103.23	-	-	114	10.77	172	125	H

Pk - Peak detector


* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 103.23 – 49.07 = 54.16 dBuV/m

HIGH CHANNEL, VERTICAL

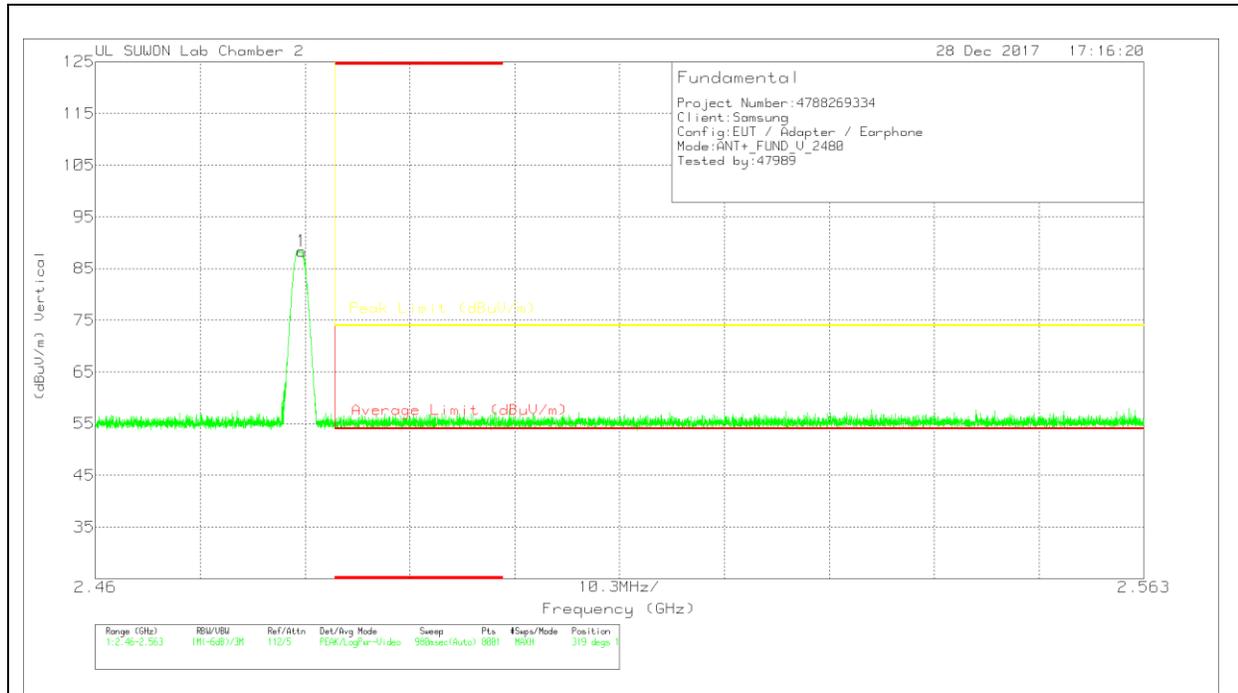

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.48	74.77	Pk		-18	88.37	-	-	114	25.63	319	150	V

Pk - Peak detector

* For marker 1, used the following method to do averaging:


DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 88.37 – 49.07 = 39.3 dBuV/m

7.2.3. TRANSMITTER RESTRICTED BAND EDGES

BANDEDGE (LOW CHANNEL, HORIZONTAL)

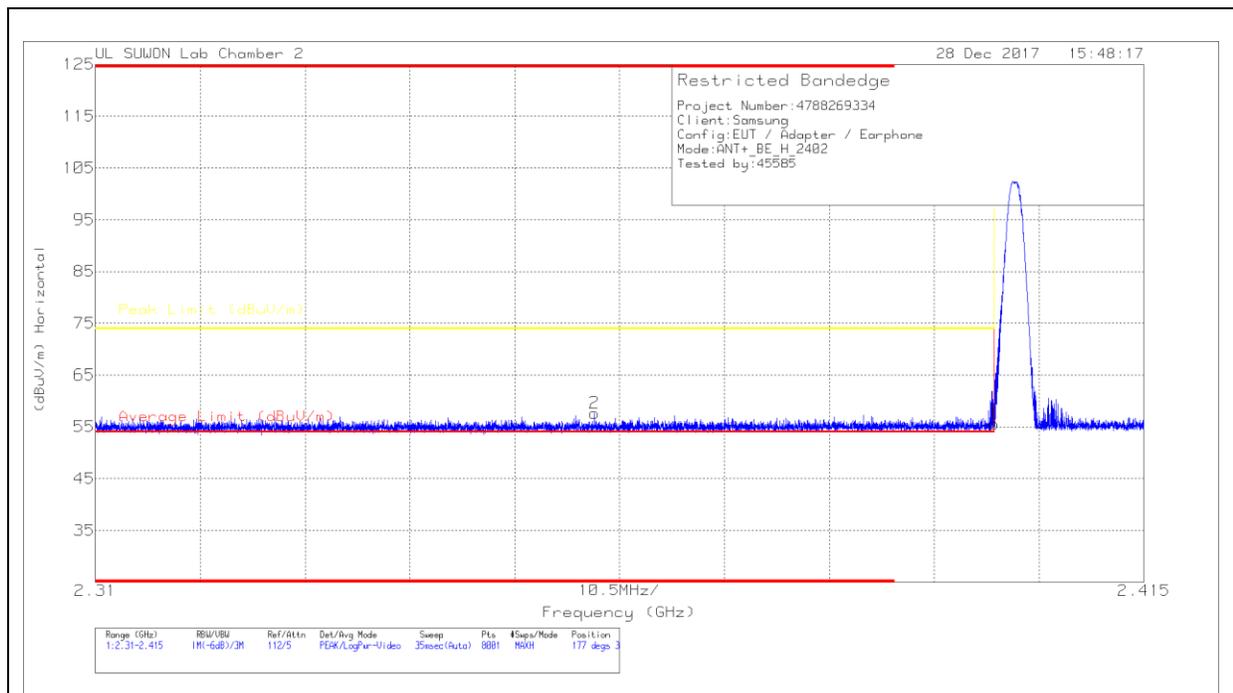

HORIZONTAL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	42.48	Pk	31.3	-18.2	55.58	-	-	74	-18.42	177	396	H
2	* 2.36	44.77	Pk	31.2	-18.3	57.67	-	-	74	-16.33	177	396	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 Pk - Peak detector

* For marker 1, used the following method to do averaging:
 DCCF=49.07
 Corrected AV reading = Peak Reading – DCCF
 = 55.58 – 49.07 = 6.51 dBuV/m

* For marker 2, used the following method to do averaging:
 DCCF=49.07
 Corrected AV reading = Peak Reading – DCCF
 = 57.67 – 49.07 = 8.6 dBuV/m

VERTICAL PEAK AND AVERAGE PLOT

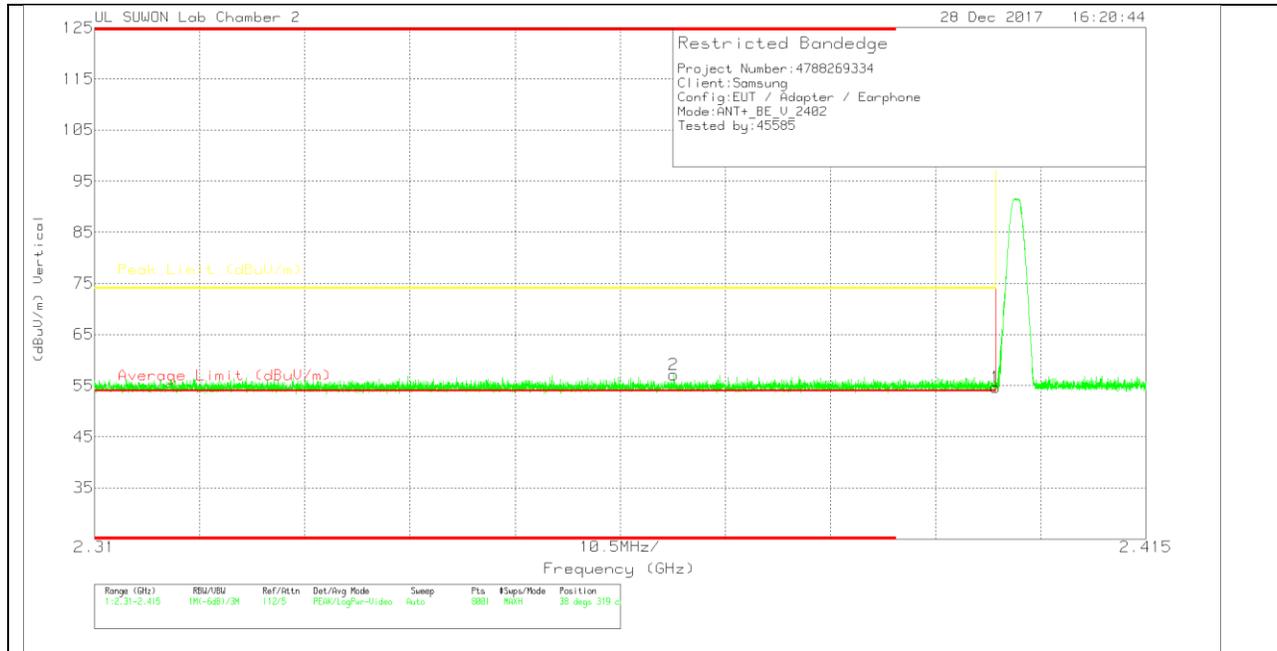

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.4	41.55	Pk		-18.2	54.65	-	-	74	-19.35	38	319	V
2	* 2.368	44.28	Pk		-18.3	57.18	-	-	74	-16.82	38	319	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 54.65 – 49.07 = 5.58 dBuV/m

* For marker 2, used the following method to do averaging:


DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 57.18 – 49.07 = 8.11 dBuV/m

AUTHORIZED BANDEDGE (HIGH CHANNEL)

HORIZONTAL PEAK AND AVERAGE PLOT

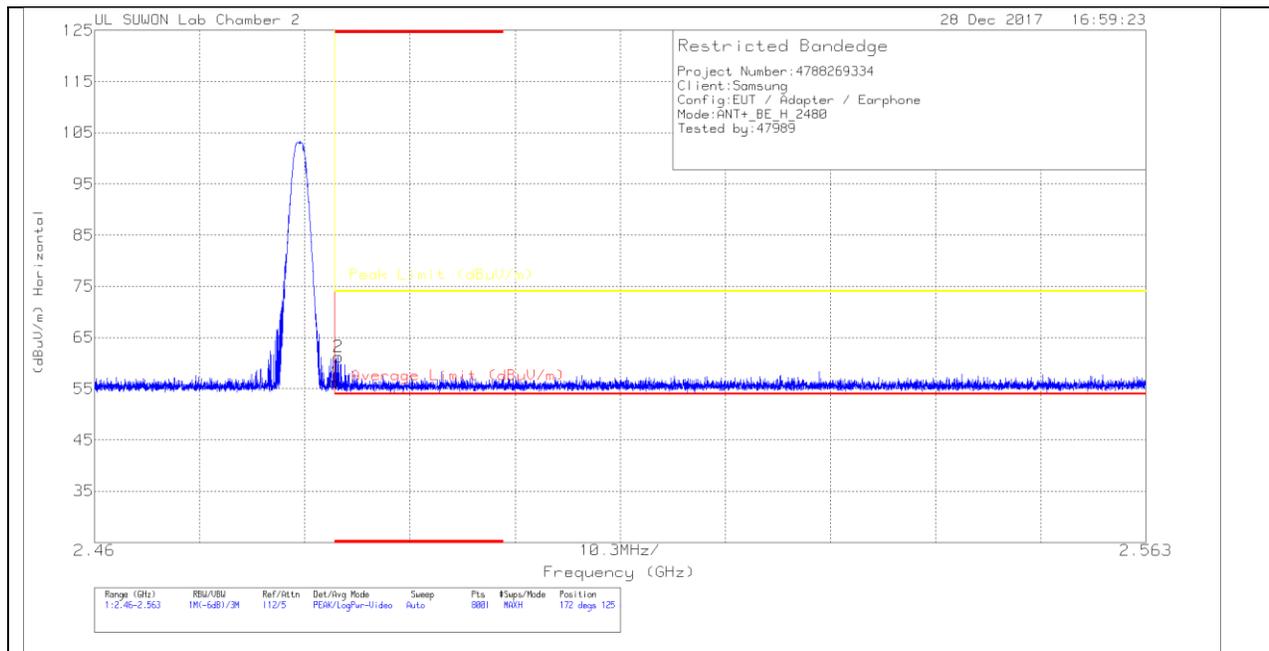

HORIZONTAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	42.62	Pk		-18	56.22	-	-	74	-17.78	172	125	H
2	* 2.484	47.63	Pk		-18	61.23	-	-	74	-12.77	172	125	H

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 56.22 – 49.07 = 7.15 dBuV/m


* For marker 2, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 61.23 – 49.07 = 12.16 dBuV/m

VERTICAL PEAK AND AVERAGE PLOT

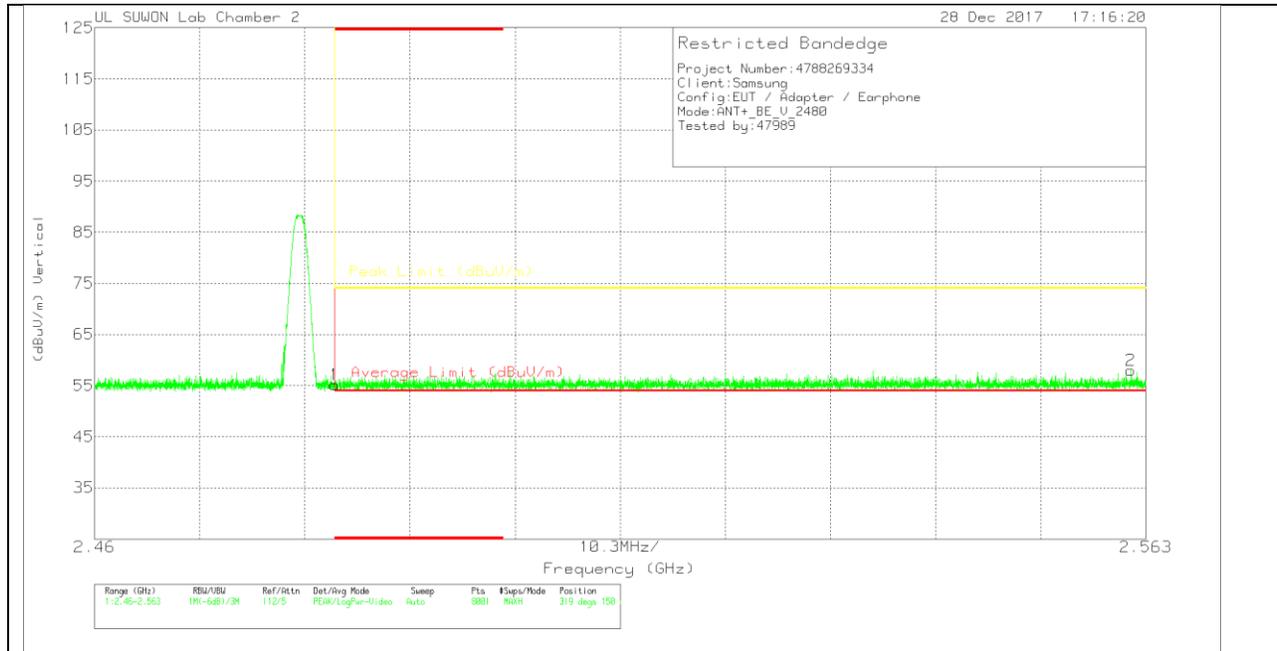

VERTICAL DATA

Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168 724]	10dB[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	41.61	Pk		-18	55.21	-	-	74	-18.79	319	150	V
2	2.562	44.3	Pk		-18	58	-	-	74	-16	319	150	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

* For marker 1, used the following method to do averaging:

DCCF=49.07

Corrected AV reading = Peak Reading – DCCF

= 55.21 – 49.07 = 6.14 dBuV/m

* For marker 2, used the following method to do averaging:


DCCF=49.07

Corrected AV reading = Peak Reading – DCCF


= 58 – 49.07 = 8.93 dBuV/m

7.2.4. HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

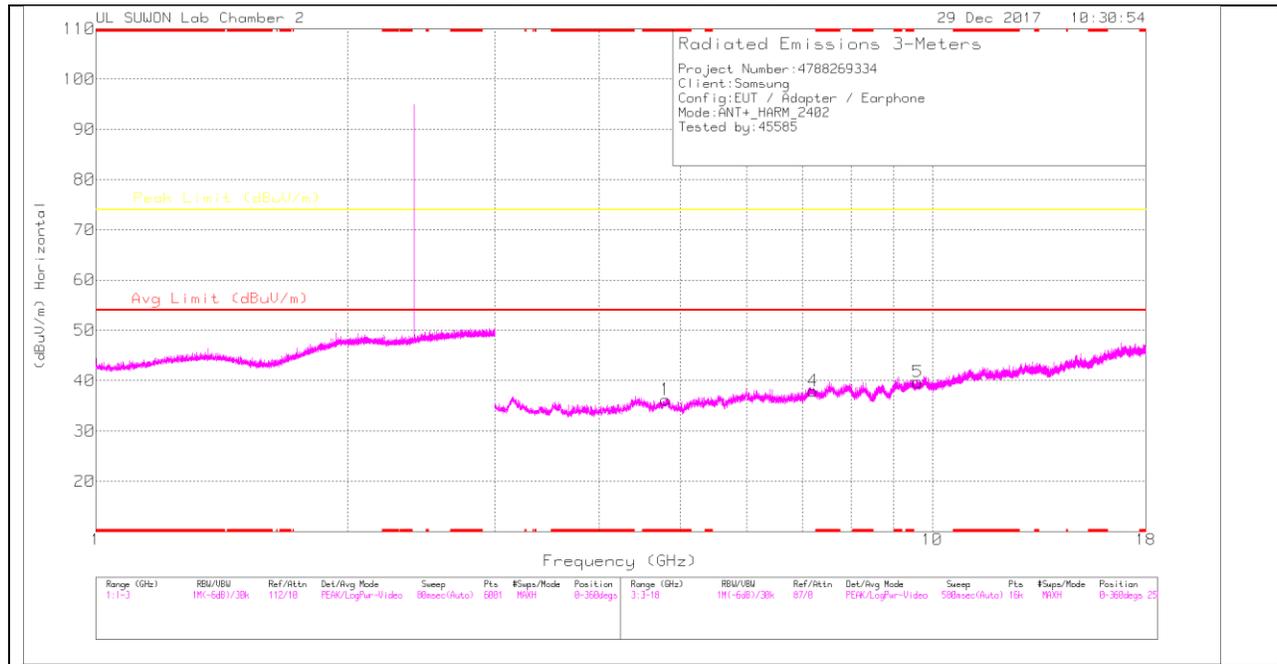

LOW CHANNEL VERTICAL

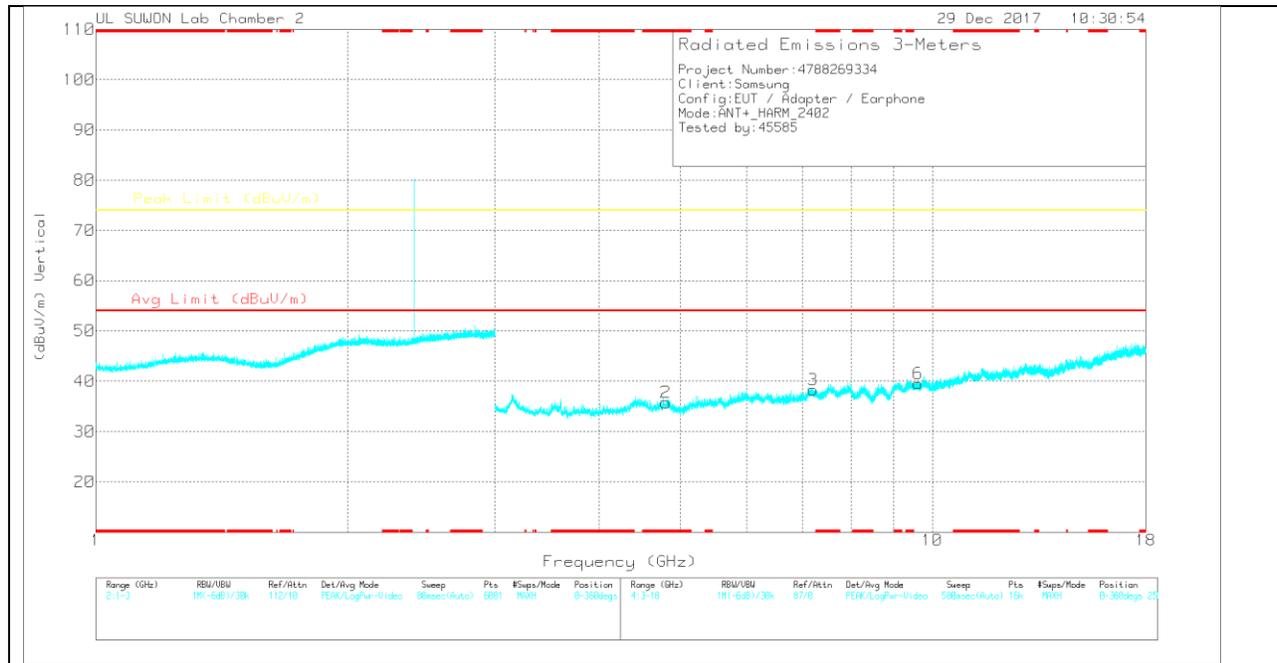

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168724]	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
1	* 4.802	26.71	PK		33.8	-24.3	0	36.21	-	-	74	-37.79	0-360	250	H
4	7.207	23.75	PK		35.9	-21.7	0	37.95	-	-	74	-36.05	0-360	150	H
5	9.609	21.45	PK		36.7	-18.4	0	39.75	-	-	74	-34.25	0-360	150	H
2	* 4.803	26.26	PK		33.8	-24.3	0	35.76	-	-	74	-38.24	0-360	250	V
3	7.207	24.11	PK		35.9	-21.7	0	38.31	-	-	74	-35.69	0-360	150	V
6	9.614	21.26	PK		36.7	-18.4	0	39.56	-	-	74	-34.44	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

MID CHANNEL HORIZONTAL

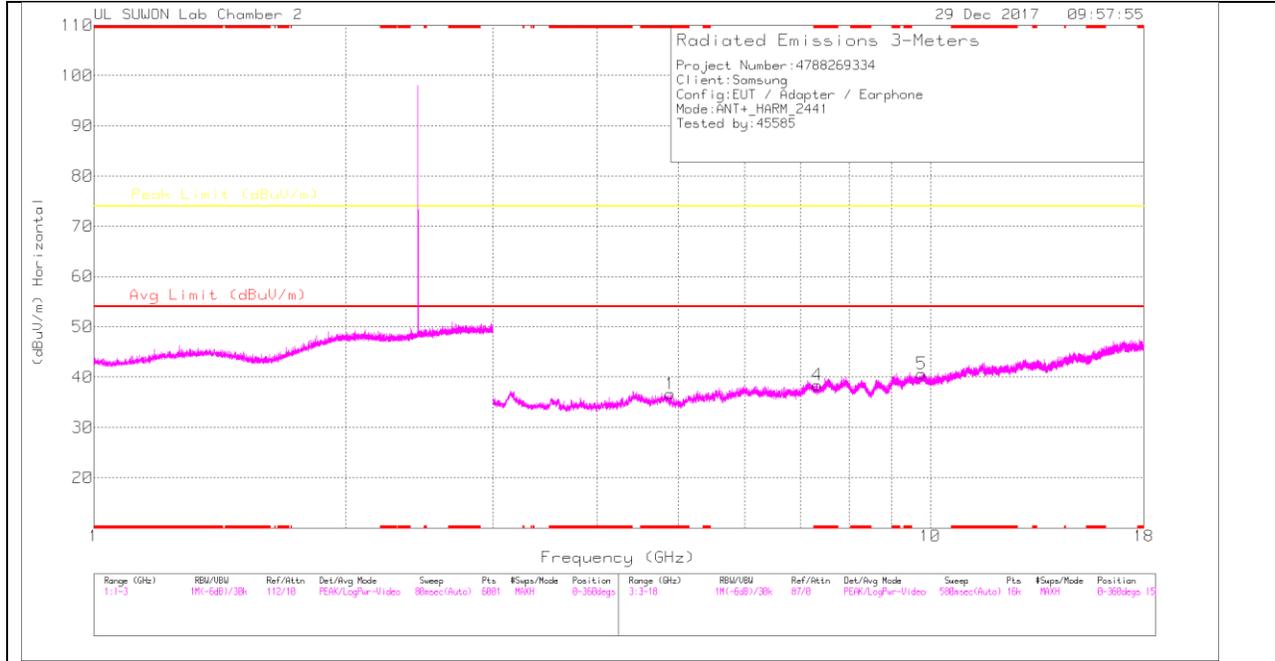

MID CHANNEL VERTICAL

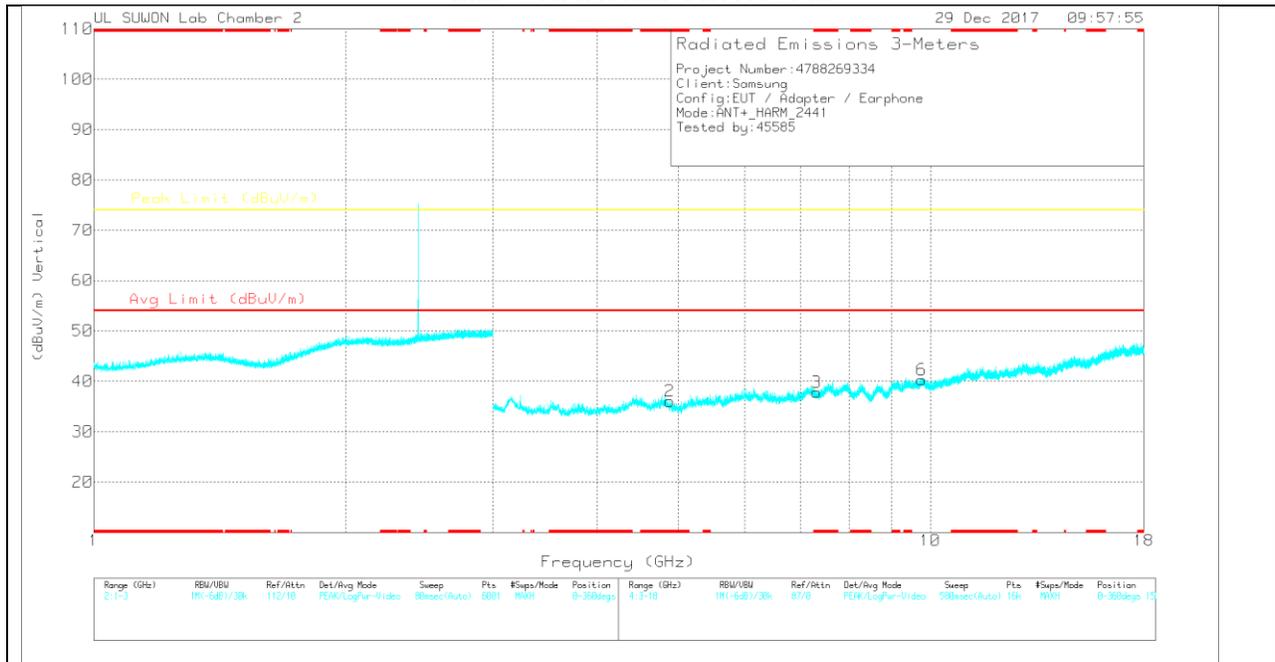

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117[00168724]	3GHz_HF[dB]	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 4.889	27.47	PK	33.8	-24.6	0	36.67	-	-	74	-37.33	0-360	150	H
4	* 7.325	24.45	PK	35.9	-21.9	0	38.45	-	-	74	-35.55	0-360	250	H
5	9.766	21.79	PK	36.9	-18	0	40.69	-	-	74	-33.31	0-360	250	H
2	* 4.882	26.82	PK	33.8	-24.6	0	36.02	-	-	74	-37.98	0-360	250	V
3	* 7.317	23.88	PK	35.9	-22	0	37.78	-	-	74	-36.22	0-360	150	V
6	9.767	21.37	PK	36.9	-18	0	40.27	-	-	74	-33.73	0-360	150	V


* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak Detector

Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

HIGH CHANNEL HORIZONTAL

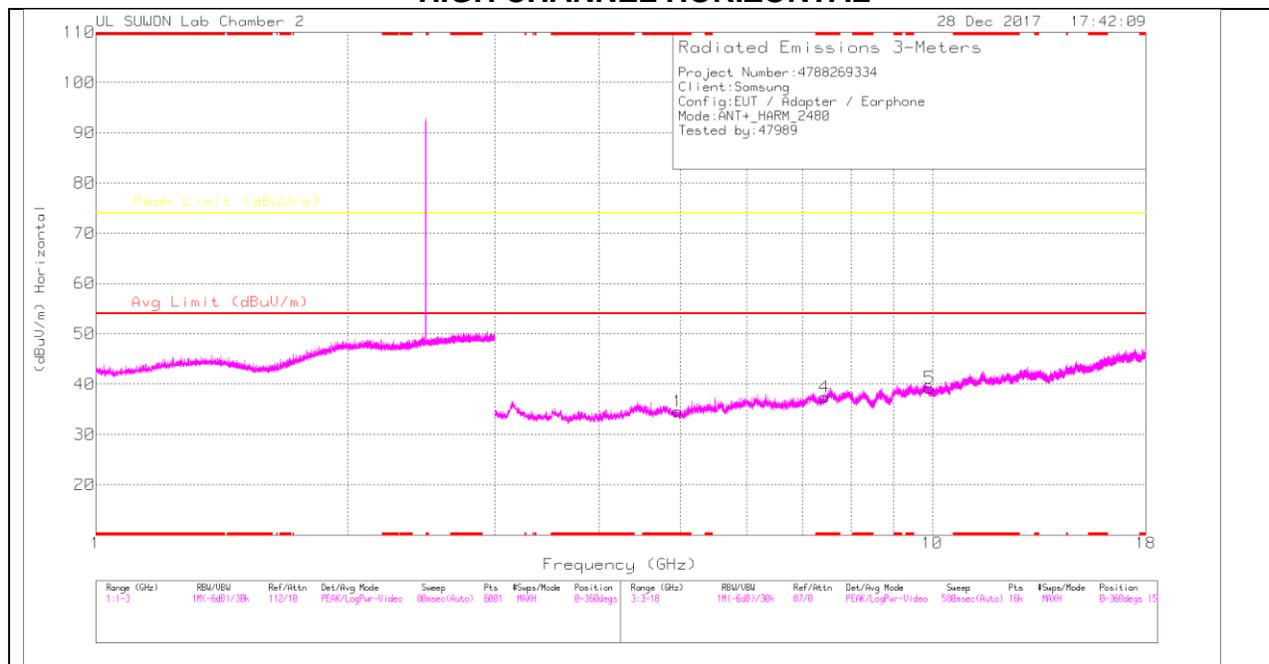

HIGH CHANNEL VERTICAL

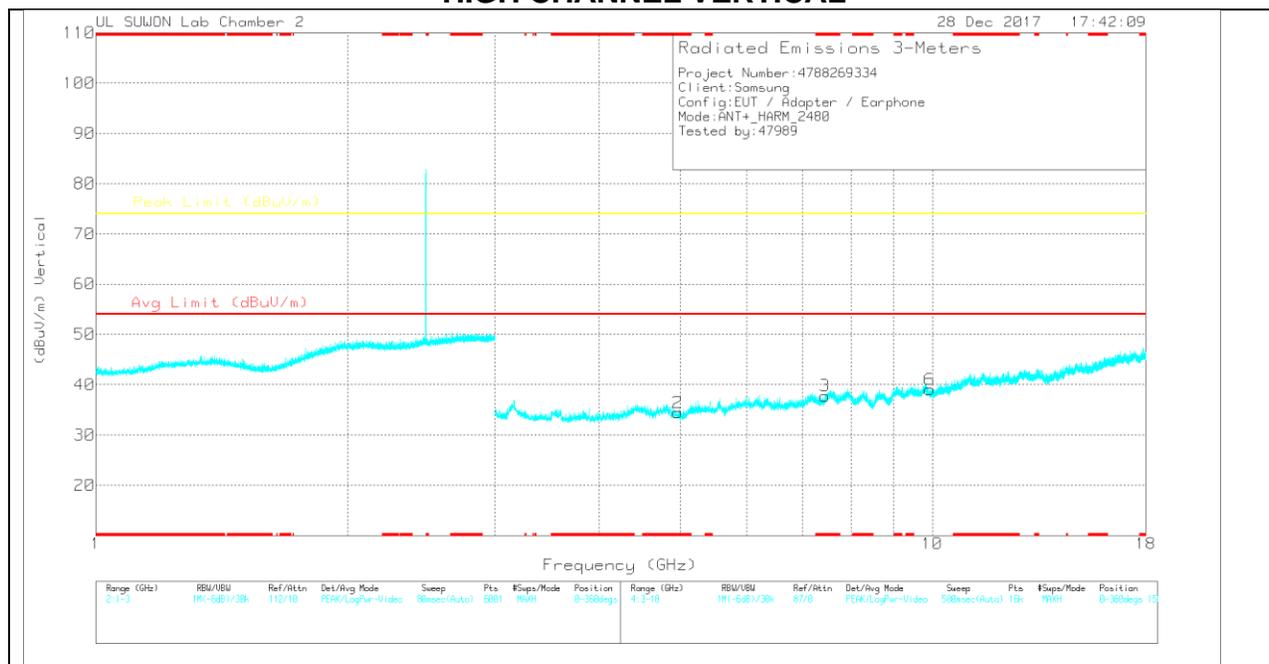

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	170531_3117(00168724)	3GHz_HP(dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity	
1	* 4.966	25.48	PK		33.8	-24.7	0	34.58	-	-	74	-39.42	0-360	250	H
4	* 7.435	22.54	PK		35.9	-21	0	37.44	-	-	74	-36.56	0-360	150	H
5	9.93	20.09	PK		37.1	-18	0	39.19	-	-	74	-34.81	0-360	150	H
2	* 4.962	25.32	PK		33.8	-24.7	0	34.42	-	-	74	-39.58	0-360	250	V
3	* 7.442	22.86	PK		35.9	-21	0	37.76	-	-	74	-36.24	0-360	150	V
6	9.93	19.92	PK		37.1	-18	0	39.02	-	-	74	-34.98	0-360	250	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band
 PK – Peak detector


Note: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than average limit (54dBuV/m).

7.2.5. SPURIOUS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

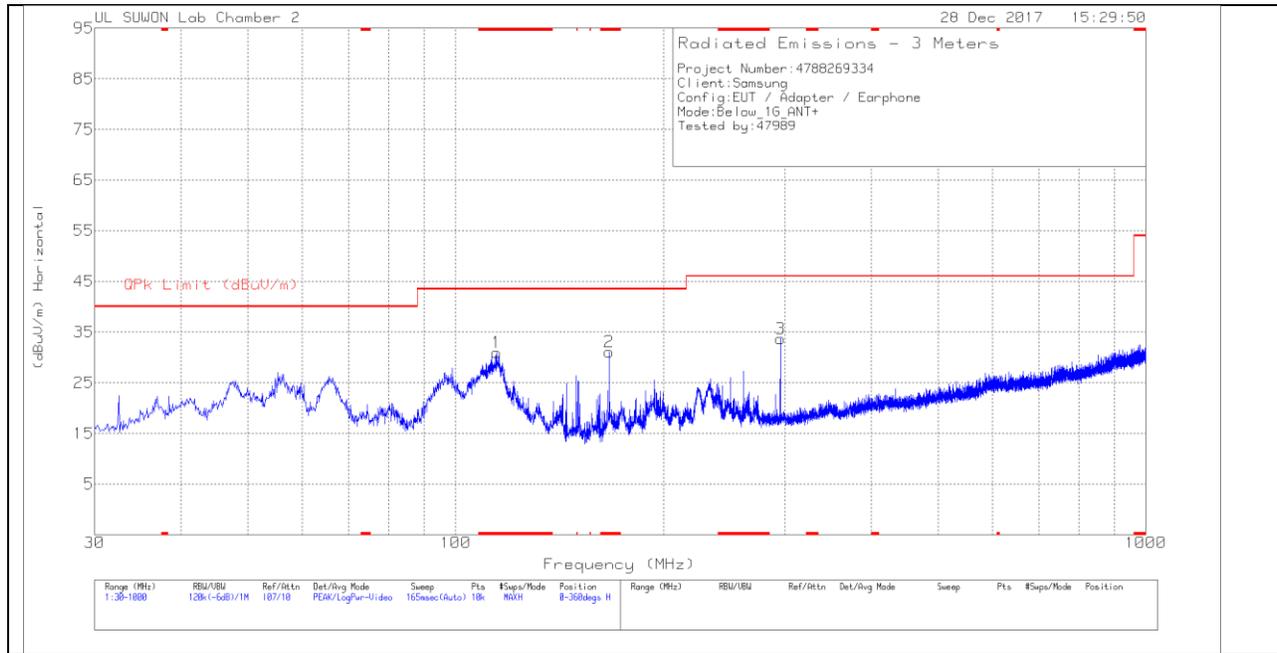

VERTICAL PLOT

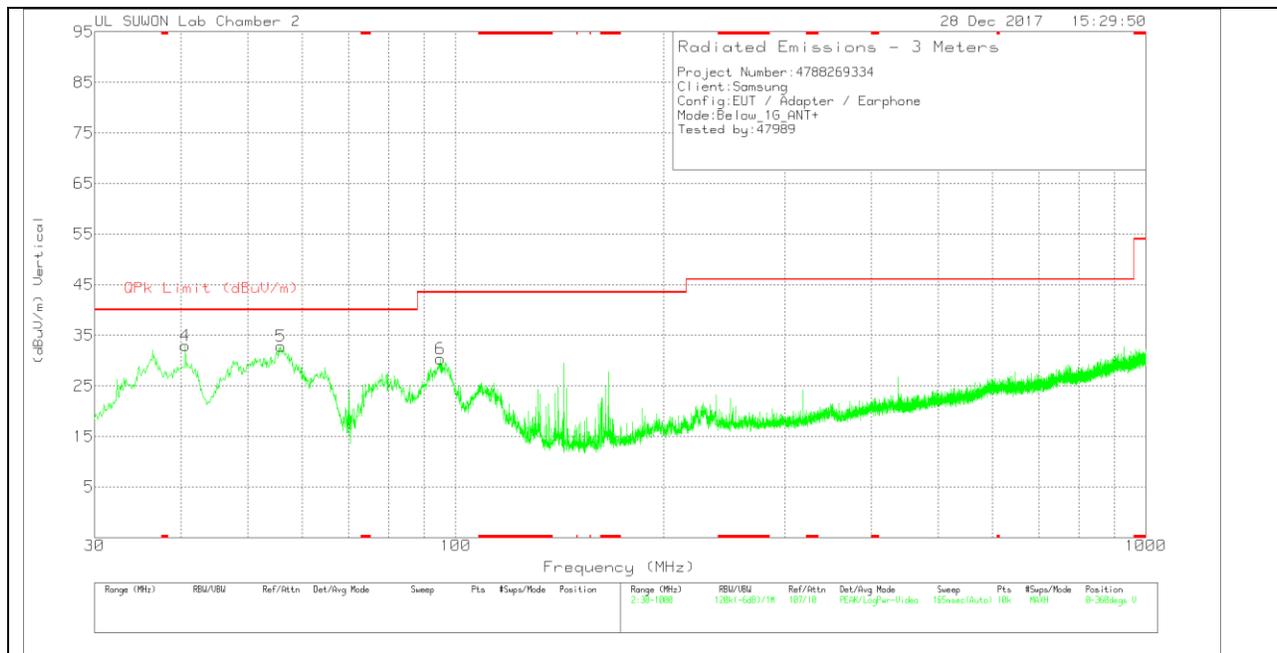

BELOW 1 GHz TABLE

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163-749	30-1000MHz[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 114.584	45.29	Pk	16.6	-30.9	30.99	43.52	-12.53	0-360	300	H
2	* 166.964	47.18	Pk	14.6	-30.7	31.08	43.52	-12.44	0-360	200	H
3	295.392	44.79	Pk	19	-30.1	33.69	46.02	-12.33	0-360	100	H
4	40.573	45.32	Pk	19.1	-31.5	32.92	40	-7.08	0-360	100	V
5	55.802	45.05	Pk	19.2	-31.4	32.85	40	-7.15	0-360	100	V
6	94.99	44.63	Pk	16.8	-31.1	30.33	43.52	-13.19	0-360	100	V

* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS

LINE 1 PLOT

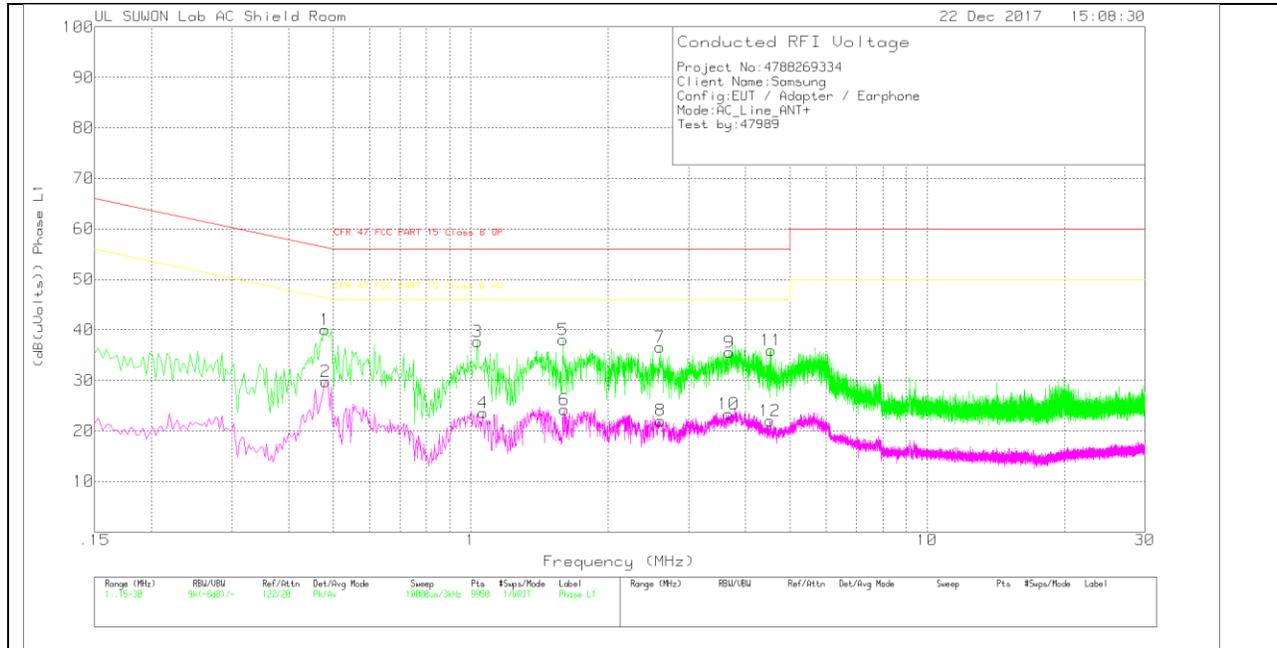

LINE 1 RESULTS

Trace Markers


Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_L1_wit h extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.48	30.2	Pk	9.7	.2	40.1	56.34	-16.24	-	-
2	.4815	19.84	Av	9.7	.2	29.74	-	-	46.31	-16.57
3	1.035	27.56	Pk	9.8	.3	37.66	56	-18.34	-	-
4	1.065	13.49	Av	9.8	.3	23.59	-	-	46	-22.41
5	1.593	27.91	Pk	9.9	.3	38.11	56	-17.89	-	-
6	1.605	13.98	Av	9.9	.3	24.18	-	-	46	-21.82
7	2.595	26.43	Pk	9.8	.3	36.53	56	-19.47	-	-
8	2.604	11.95	Av	9.8	.3	22.05	-	-	46	-23.95
9	3.687	25.45	Pk	9.8	.3	35.55	56	-20.45	-	-
10	3.675	13.28	Av	9.8	.3	23.38	-	-	46	-22.62
11	4.548	25.98	Pk	9.7	.3	35.98	56	-20.02	-	-
12	4.53	11.99	Av	9.7	.3	21.99	-	-	46	-24.01

Pk - Peak detector

Av - Average detection

LINE 2 PLOT

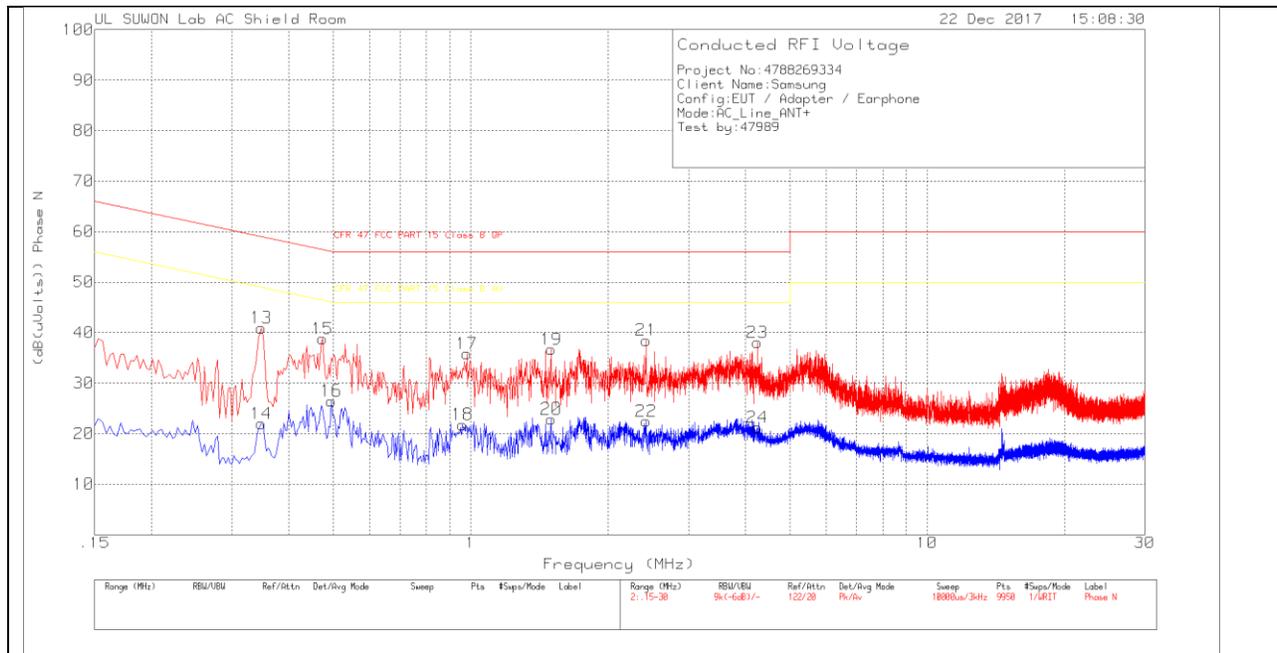

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101837_N_with extension	CABLELOSS(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.348	30.97	Pk	9.8	.2	40.97	59.01	-18.04	-	-
14	.348	11.97	Av	9.8	.2	21.97	-	-	49.01	-27.04
15	.474	28.8	Pk	9.8	.2	38.8	56.44	-17.64	-	-
16	.495	16.5	Av	9.8	.2	26.5	-	-	46.08	-19.58
17	.981	25.71	Pk	9.8	.3	35.81	56	-20.19	-	-
18	.96	11.7	Av	9.8	.3	21.8	-	-	46	-24.2
19	1.5	26.51	Pk	9.9	.3	36.71	56	-19.29	-	-
20	1.5	12.71	Av	9.9	.3	22.91	-	-	46	-23.09
21	2.421	28.3	Pk	9.9	.3	38.5	56	-17.5	-	-
22	2.421	12.31	Av	9.9	.3	22.51	-	-	46	-23.49
23	4.248	27.98	Pk	9.8	.3	38.08	56	-17.92	-	-
24	4.248	11.18	Av	9.8	.3	21.28	-	-	46	-24.72

Pk - Peak detector

Av - Average detection