

FCC/IC LTE REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Date of Issue:
January 13, 2020

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2001-FI015

FCC ID:	A3LSMG715U
IC:	649E-SMG715W
APPLICANT:	SAMSUNG Electronics Co., Ltd.

Model(s): SM-G715U1
 Additional Model(s): SM-G715W
 EUT Type: Mobile Phone
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 FCC Rule Part(s): §90, §2
 IC Rule(s): RSS-Gen Issue5, RSS-140 issue 1

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	ERP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band14 (5)	790.5 –795.5	4M53G7D	QPSK	0.100	20.01
		4M54W7D	16QAM	0.076	18.81
		4M52W7D	64QAM	0.061	17.84
LTE – Band14 (10)	793.0	9M03G7D	QPSK	0.103	20.11
		9M01W7D	16QAM	0.078	18.90
		9M02W7D	64QAM	0.063	18.00

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.
 HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Kwon Jeong
Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2001-FI015	January 13, 2020	- First Approval Report

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.(HCT Accreditation No.: KT197)

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT.....	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS.....	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER.....	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH.	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	10
3.6 BAND EDGE	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	13
3.8 WORST CASE(RADIATED TEST)	14
3.9 WORST CASE(CONDUCTED TEST)	15
3.10 RECEIVER SPURIOUS EMISSIONS	16
4. LIST OF TEST EQUIPMENT	18
5. MEASUREMENT UNCERTAINTY	19
6. SUMMARY OF TEST RESULTS	20
6.1 Test Condition : Conducted Test	20
6.2 Test Condition : Radiated Test.....	20
7. SAMPLE CALCULATION.....	21
7.1 ERP Sample Calculation.....	21
7.2 EIRP Sample Calculation	21
7.3. Emission Designator.....	22
8. TEST DATA	23
8.1 EFFECTIVE RADIATED POWER.....	23
8.2 RADIATED SPURIOUS EMISSIONS	24
8.3 OCCUPIED BANDWIDTH	27
8.4 CONDUCTED SPURIOUS EMISSIONS	28
8.5 BAND EDGE	28
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	29
8.7 RECEIVER SPURIOUS EMISSIONS	33
9. TEST PLOTS.....	34
10. APPENDIX A_ TEST SETUP PHOTO	61

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG715U
IC	649E-SMG715W
Application Type:	Certification
FCC Classification:	PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§90, §2
IC Rule(s):	RSS-Gen Issue5, RSS-140 issue 1
EUT Type:	Mobile Phone
Model(s):	SM-G715U1
Additional Model(s):	SM-G715W
Tx Frequency:	790.5 MHz –795.5 MHz (LTE – Band 14 (5MHz)) 793.0 MHz (LTE – Band 14 (10 MHz))
Date(s) of Tests:	December 17, 2019 ~ January 08, 2020

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac (HT20/40/80), Bluetooth, BT LE, NFC, ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $>$ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss}_{(dB)} + \text{antenna gain}_{(dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundalmatal frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 OCCUPIED BANDWIDTH.

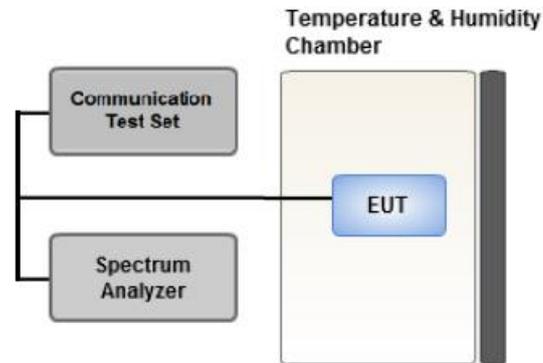

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

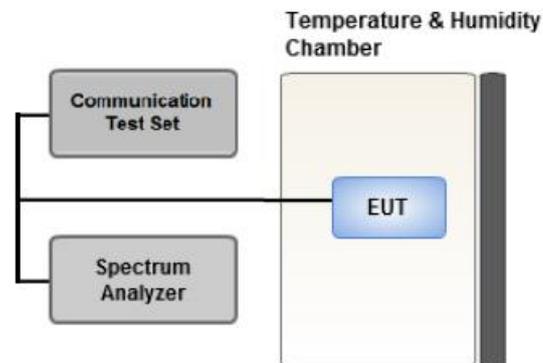

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep \geq 2 * Span / RBW

3.6 BAND EDGE

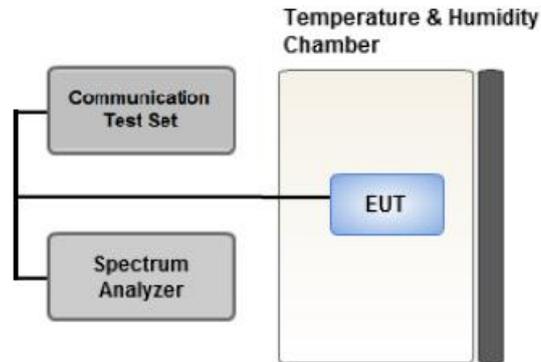

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings


1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

§90.543(e)

1. On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
2. On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
3. On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.
4. Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
5. Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater.
However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

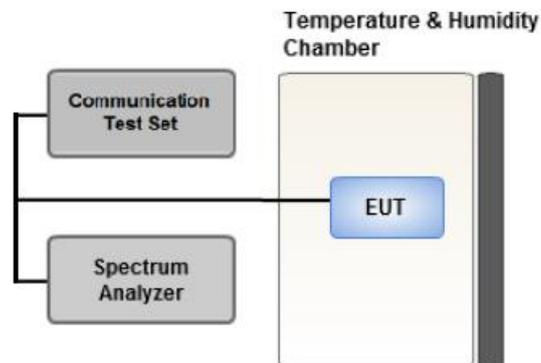

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

.- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

.- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
 - All modes of operation were investigated and the worst case configuration results are reported.
 - The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
 - SM-G715U1 & additional models were tested and the worst case results are reported.
- (Worst case : SM-G715U1)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Radiated Power	QPSK, 16QAM, 64QAM	1	0	Z
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.9 WORST CASE(CONDUCTED TEST)

- Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

Conducted Output Power value can be confirmed on the SAR report.

- SM-G715U1 & additional models were tested and the worst case results are reported.

(Worst case : SM-G715U1)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	5, 10	Mid	Full RB	0
Band Edge	* QPSK	5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		5	Low, High	Full RB	0
		10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	5	Low, Mid, High	1	0
		10	Mid	1	0

3.10 RECEIVER SPURIOUS EMISSIONS

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20 \log (\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 3 \times$ RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW $\geq 1/\tau$ Hz, where τ = pulse width in seconds

The actual setting value of VBW = 1 kHz
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibrati on Interval	Calibration Due
T&M SYSTEM	FBSR-02B(WHK1.2/15G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
T&M SYSTEM	FBSR-02B(WHK3.3/18G-10EF)/H.P.F	-	06/10/2019	Annual	06/10/2020
WAINWRIGHT INSTRUMENT	WHNX6.0/26.5G-6SS/H.P.F	1	03/20/2019	Annual	03/20/2020
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	11275	05/03/2019	Annual	05/03/2020
Agilent	E3632A/DC Power Supply	MY40004326	07/01/2019	Annual	07/01/2020
Schwarzbeck	UHAP/ Dipole Antenna	557	03/29/2019	Biennial	03/29/2021
Schwarzbeck	UHAP/ Dipole Antenna	558	03/29/2019	Biennial	03/29/2021
ESPEC	SU-642 / Chamber	93000717	08/14/2019	Annual	08/14/2020
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	08/29/2019	Biennial	08/29/2021
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	09/25/2019	Biennial	09/25/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/29/2019	Biennial	04/29/2021
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	01/28/2019	Biennial	01/28/2021
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY51110063	05/08/2019	Annual	05/08/2020
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/04/2019	Annual	06/04/2020
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/14/2019	Annual	10/14/2020
Agilent	8960 (E5515C)/ Base Station	MY48360800	08/27/2019	Annual	08/27/2020
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	03/22/2019	Biennial	03/22/2021
Anritsu Corp.	MT8821C/Wideband Radio Communication Tester	6201502997	08/09/2019	Annual	08/09/2020
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	01/30/2019	Annual	01/30/2020
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/15/2019	Annual	07/15/2020
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	05/17/2019	Annual	05/17/2020
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

Note:

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	RSS Gen(6.7)	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.543(e)	RSS 140(4.4)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
On all frequencies between 769-775 MHz and 799-805 MHz.	§90.543(e)	RSS 140(4.4)	< 65 + 10log10 (P[Watts])	PASS (See Note3)
Conducted Output Power	§2.1046	-	N/A	See Note1
Frequency stability / variation of ambient temperature	§2.1055, §90.539(e)	RSS 140(4.2)	< 2.5 ppm	PASS

Note:

1. See SAR Report
2. The same samples were used for SAR and EMC
3. Since it was not possible to set the resolution bandwidth to 6.25 kHz with the available equipment, a bandwidth of 10 kHz was used instead to show compliance.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	IC Section(s)	Test Limit	Test Result
Effective Radiated Power	§90.542(a)(7)	RSS 140(4.3)	< 3 Watts max. ERP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.543(e)	RSS 140(4.4)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS
Undesirable Emissions in the 1559 – 1610 MHz band	§2.1053, §90.543(f)	RSS 140(4.4)	< -70dBW/MHz EIRP (wideband) < -80dBW EIRP (narrowband)	PASS
Receiver Spurious Emissions	N/A	RSS Gen(7)	Section 8.7	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EFFECTIVE RADIATED POWER

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
790.5	LTE B14 (5 MHz)	QPSK	-31.41	31.38	-10.11	1.26	H	< 3.00	0.100	20.01
		16-QAM	-32.61	30.18	-10.11	1.26	H		0.076	18.81
		64-QAM	-33.58	29.21	-10.11	1.26	H		0.061	17.84
793.0		QPSK	-31.82	31.11	-10.12	1.26	H		0.094	19.73
		16-QAM	-33.05	29.88	-10.12	1.26	H		0.071	18.50
		64-QAM	-33.94	28.99	-10.12	1.26	H		0.058	17.61
795.5		QPSK	-32.25	30.79	-10.13	1.26	H		0.087	19.41
		16-QAM	-33.36	29.68	-10.13	1.26	H		0.068	18.30
		64-QAM	-34.38	28.66	-10.13	1.26	H		0.053	17.28

Freq (MHz)	Mod (Bandwidth)	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBd)	C.L	Pol	Limit	ERP	
									W	W dBm
793.0	LTE B14 (10 MHz)	QPSK	-31.44	31.49	-10.12	1.26	H	< 3.00	0.103	20.11
		16-QAM	-32.65	30.28	-10.12	1.26	H		0.078	18.90
		64-QAM	-33.55	29.38	-10.12	1.26	H		0.063	18.00

8.2 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY: 790.50 MHz
- ▣ MEASURED OUTPUT POWER: 22.16 dBm = 0.164 W
- ▣ MODE: LTE B14
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 35.16 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23305 (790.5)	1,581.0	-54.03	9.05	-63.13	1.80	V	-55.88	78.04
	2,371.5	-50.65	10.05	-54.40	2.25	H	-46.60	68.75
	3,162.0	-50.33	11.28	-51.50	2.61	V	-42.83	64.99
23330 (793.0)	1,586.0	-51.76	9.12	-61.07	1.81	H	-53.76	75.92
	2,379.0	-49.22	10.05	-52.71	2.25	H	-44.91	67.06
	3,172.0	-49.47	11.35	-50.31	2.61	V	-41.57	63.72
23355 (795.5)	1,591.0	-54.39	9.18	-63.92	1.81	H	-56.55	78.70
	2,386.5	-50.47	10.09	-54.15	2.26	H	-46.32	68.48
	3,182.0	-51.79	11.35	-52.85	2.64	V	-44.14	66.29

- ▣ OPERATING FREQUENCY: 793.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.26 dBm = 0.168 W
- ▣ MODE: LTE B14
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ LIMIT: $43 + 10 \log_{10}(W) =$ 35.76 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	dBc
23330 (793.0)	1,586.0	-54.42	9.12	-63.73	1.81	V	-56.42	78.68
	2,379.0	-57.33	10.05	-60.82	2.25	H	-53.02	75.28
	3,172.0	-50.12	11.35	-50.96	2.61	V	-42.22	64.48

1559 MHz ~ 1610 MHz BAND

- ▣ OPERATING FREQUENCY: 790.5 MHz, 793.0 MHz, 795.5 MHz
- ▣ MEASURED OUTPUT POWER: 5 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
790.5	1576.7	Narrow Band	-56.92	9.05	-66.02	1.80	H	-58.77	8.77
793.0	1581.8		-58.57	9.05	-67.67	1.80	H	-60.42	10.42
795.5	1586.7		-62.81	9.18	-72.34	1.81	H	-64.97	14.97

Note:

The lower narrowband limit was applied because the spurious emission was not found.

- ▣ OPERATING FREQUENCY: 793.0 MHz
- ▣ MEASURED OUTPUT POWER: 10 MHz QPSK
- ▣ DISTANCE: 3 meters
- ▣ WIDEBAND EMISSION LIMIT: -80 dBW/ MHz (= -50 dBm/ MHz)

Operating Frequency (MHz)	Measured Frequency (MHz)	EMISSION TYPE	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Margin (dB)
793.0	1577.2	Narrow Band	-60.05	9.05	-69.15	1.80	V	-61.90	11.90

Note:

The lower narrowband limit was applied because the spurious emission was not found.

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
14	5 MHz	793.0	QPSK	25	0	4.5335
			16-QAM	25	0	4.5352
			64-QAM	25	0	4.5230
	10 MHz		QPSK	50	0	9.0293
			16-QAM	50	0	9.0091
			64-QAM	50	0	9.0169

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 35 ~ 40.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
14	5	790.5	3.7184	27.976	-67.375	-39.399	-13.00
		793.0	3.6965	27.976	-67.448	-39.472	
		795.5	3.7124	27.976	-67.394	-39.418	
	10	793.0	3.6795	27.976	-67.485	-39.509	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 57 ~ 60.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


8.5 BAND EDGE

- Plots of the EUT's Band Edge are shown Page 41 ~ 56.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- ▣ MODE: LTE 14
- ▣ OPERATING FREQUENCY: 790,500,000 Hz
- ▣ CHANNEL: 23305 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	790 499 996	0.00	0.000 000	0.0000
100%		-30	790 499 998	2.50	0.000 000	0.0032
100%		-20	790 499 991	-5.20	-0.000 001	-0.0066
100%		-10	790 499 991	-4.50	-0.000 001	-0.0057
100%		0	790 499 991	-5.00	-0.000 001	-0.0063
100%		+10	790 499 992	-4.20	-0.000 001	-0.0053
100%		+30	790 500 000	4.30	0.000 001	0.0054
100%		+40	790 500 001	4.60	0.000 001	0.0058
100%		+50	790 499 992	-3.50	0.000 000	-0.0044
Batt. Endpoint		3.600	+20	790 499 993	-3.40	0.000 000

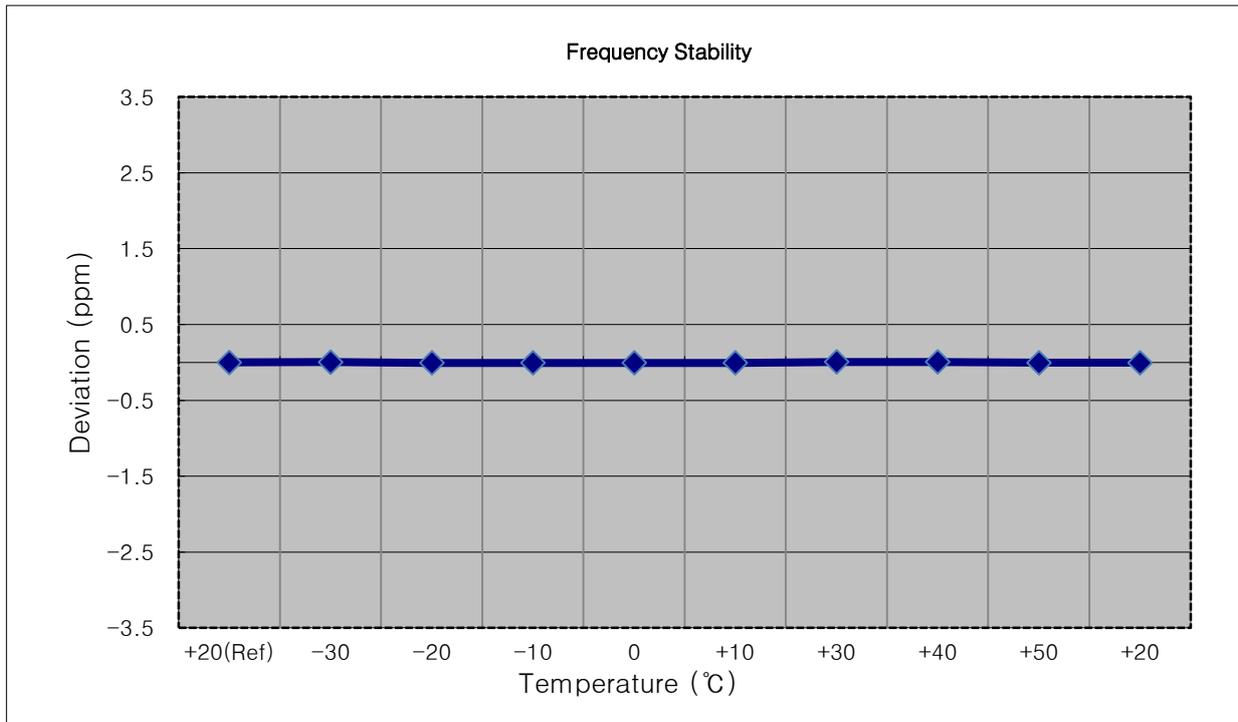


- ▣ MODE: LTE 14
- ▣ OPERATING FREQUENCY: 793,000,000 Hz
- ▣ CHANNEL: 23330 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	792 999 998	0.00	0.000 000	0.0000
100%		-30	792 999 993	-5.20	-0.000 001	-0.0066
100%		-20	792 999 995	-3.50	0.000 000	-0.0044
100%		-10	792 999 994	-4.30	-0.000 001	-0.0054
100%		0	793 000 001	3.10	0.000 000	0.0039
100%		+10	792 999 993	-5.50	-0.000 001	-0.0069
100%		+30	793 000 001	2.70	0.000 000	0.0034
100%		+40	793 000 002	3.70	0.000 000	0.0047
100%		+50	793 000 001	2.50	0.000 000	0.0032
Batt. Endpoint		3.600	+20	792 999 993	-4.80	-0.000 001

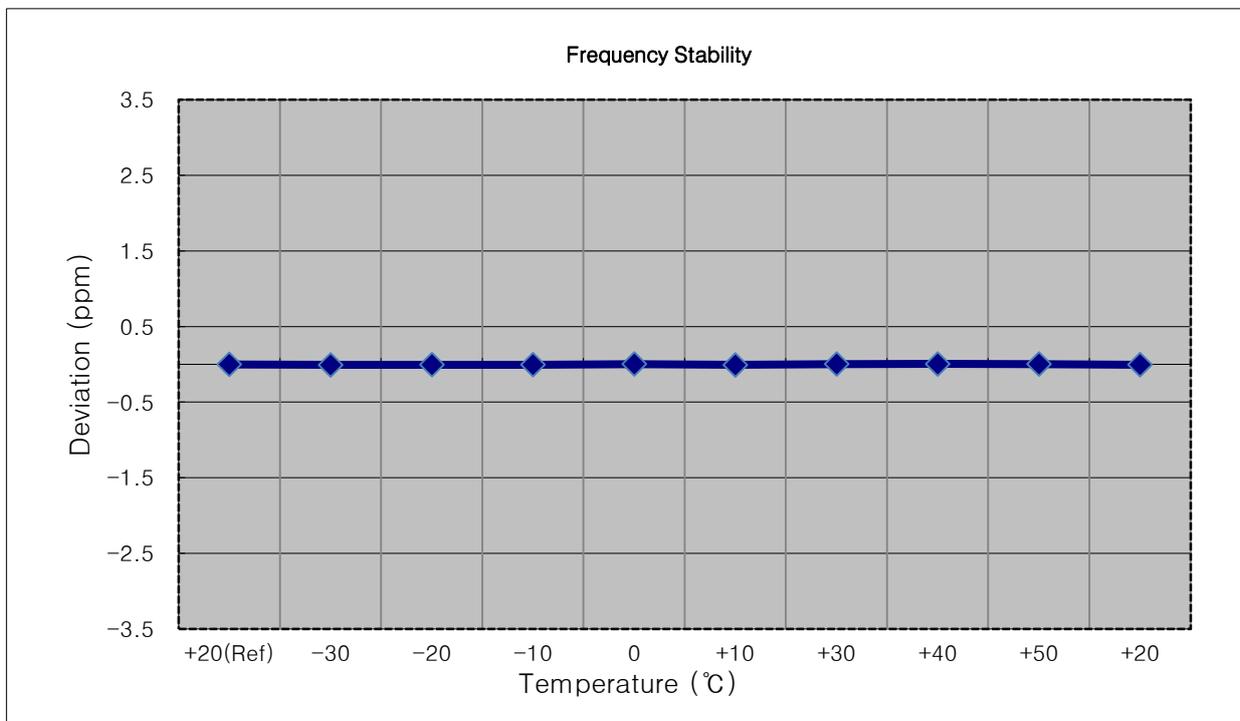


- ▣ MODE: LTE 14
- ▣ OPERATING FREQUENCY: 795,500,000 Hz
- ▣ CHANNEL: 23355 (5 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	795 500 003	0.00	0.000 000	0.0000
100%		-30	795 499 999	-4.70	-0.000 001	-0.0059
100%		-20	795 500 006	2.80	0.000 000	0.0035
100%		-10	795 500 007	3.20	0.000 000	0.0040
100%		0	795 499 999	-4.60	-0.000 001	-0.0058
100%		+10	795 499 999	-4.50	-0.000 001	-0.0057
100%		+30	795 499 999	-4.70	-0.000 001	-0.0059
100%		+40	795 500 006	2.90	0.000 000	0.0036
100%		+50	795 500 000	-3.40	0.000 000	-0.0043
Batt. Endpoint		3.600	+20	795 500 006	2.90	0.000 000

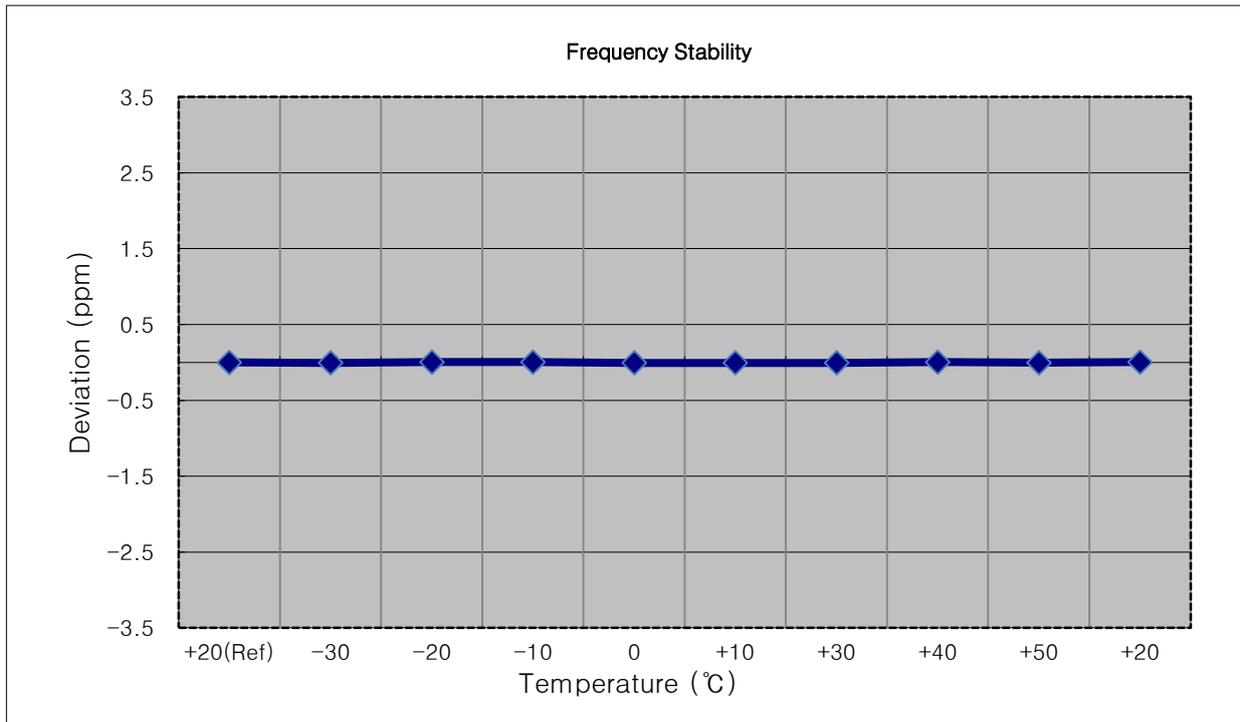

- ▣ MODE: LTE 14
- ▣ OPERATING FREQUENCY: 793,000,000 Hz
- ▣ CHANNEL: 23330 (10 MHz)
- ▣ REFERENCE VOLTAGE: 3.85 VDC
- ▣ DEVIATION LIMIT: 2.5ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	793 000 002	0.00	0.000 000	0.0000
100%		-30	793 000 001	-1.10	0.000 000	-0.0014
100%		-20	793 000 003	1.50	0.000 000	0.0019
100%		-10	793 000 001	-1.00	0.000 000	-0.0013
100%		0	793 000 005	3.10	0.000 000	0.0039
100%		+10	793 000 004	1.80	0.000 000	0.0023
100%		+30	793 000 001	-1.00	0.000 000	-0.0013
100%		+40	793 000 001	-0.80	0.000 000	-0.0010
100%		+50	793 000 001	-0.80	0.000 000	-0.0010
Batt. Endpoint	3.600	+20	793 000 002	0.70	0.000 000	0.0009

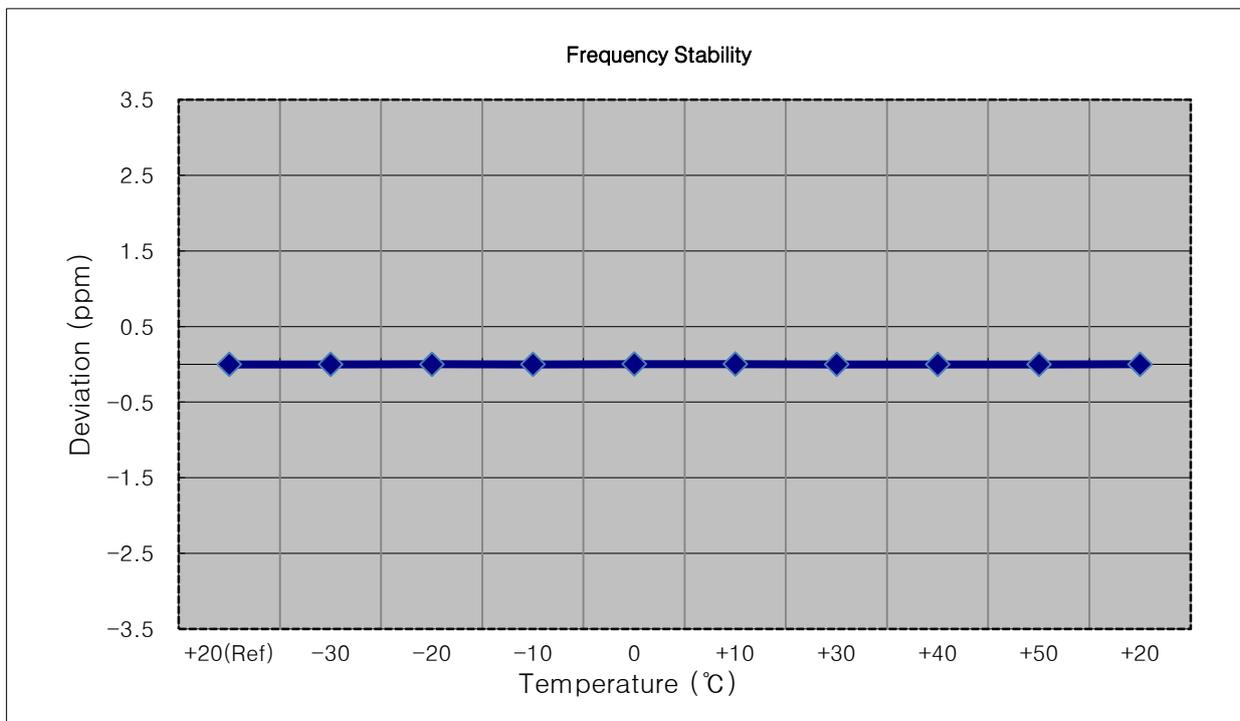

8.7 RECEIVER SPURIOUS EMISSIONS

Frequency Range : 30 MHz ~ 1 GHz

Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Frequency Range : Above 1 GHz


Frequency	Reading	Ant. factor+Cable loss- Amp Gain	Ant. POL	Total	Limit	Margin
MHz	dB μ V	dB /m	(H/V)	dB μ V/m	dB μ V/m	dB
No Peak Found						

Limit


Frequency (MHz)	Field Strength (μ v/m at 3 meters)
30 – 88	100
88 - 216	150
216 – 960	200
Above 960	500

9. TEST PLOTS


BAND 14. Occupied Bandwidth Plot (Ch.23330 QPSK RB 25) 5 MHz

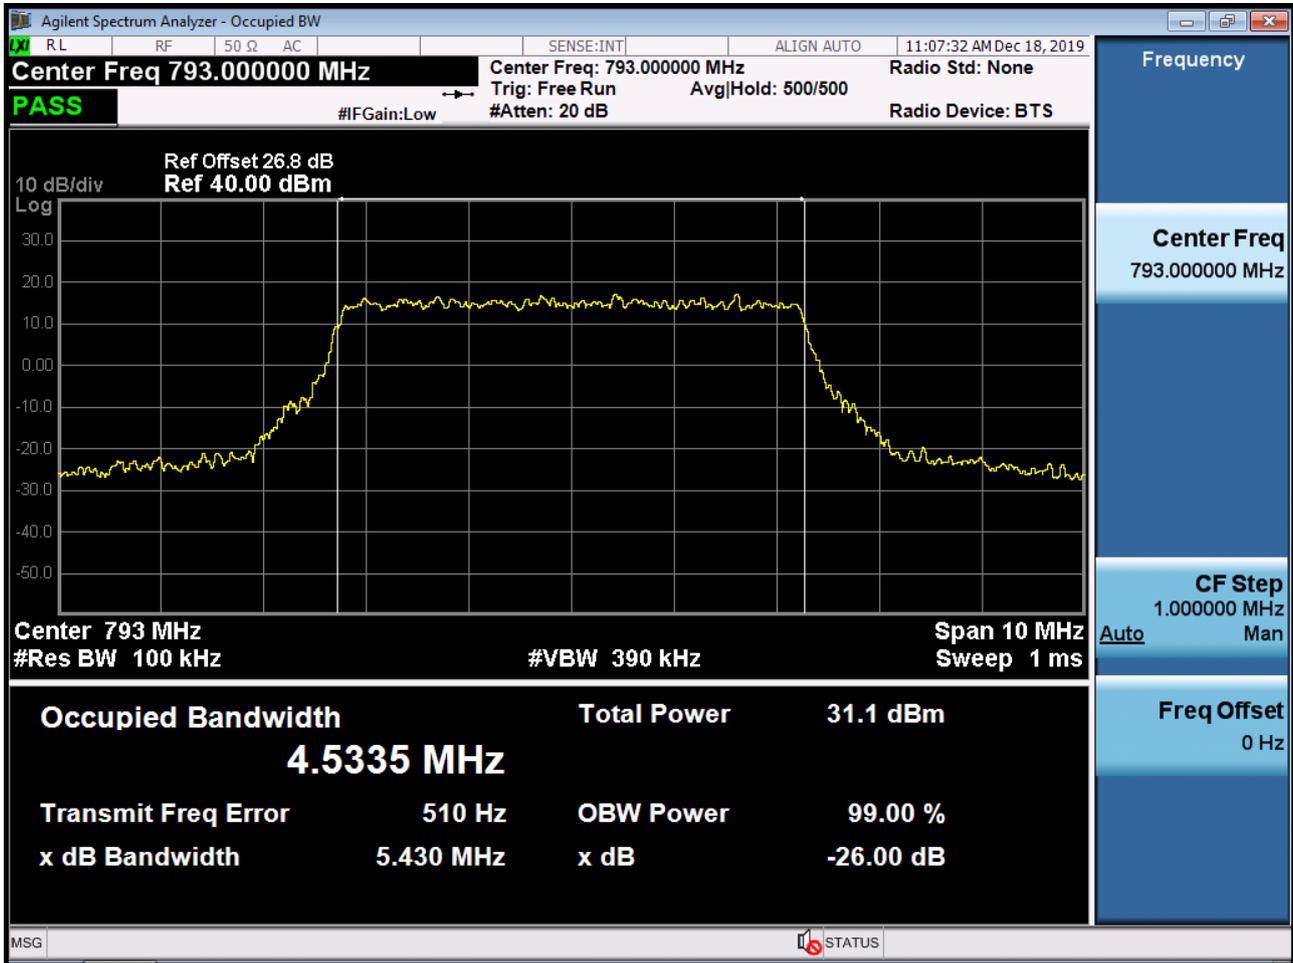


BAND 14. Occupied Bandwidth Plot (Ch.23330 16-QAM RB 25) 5 MHz

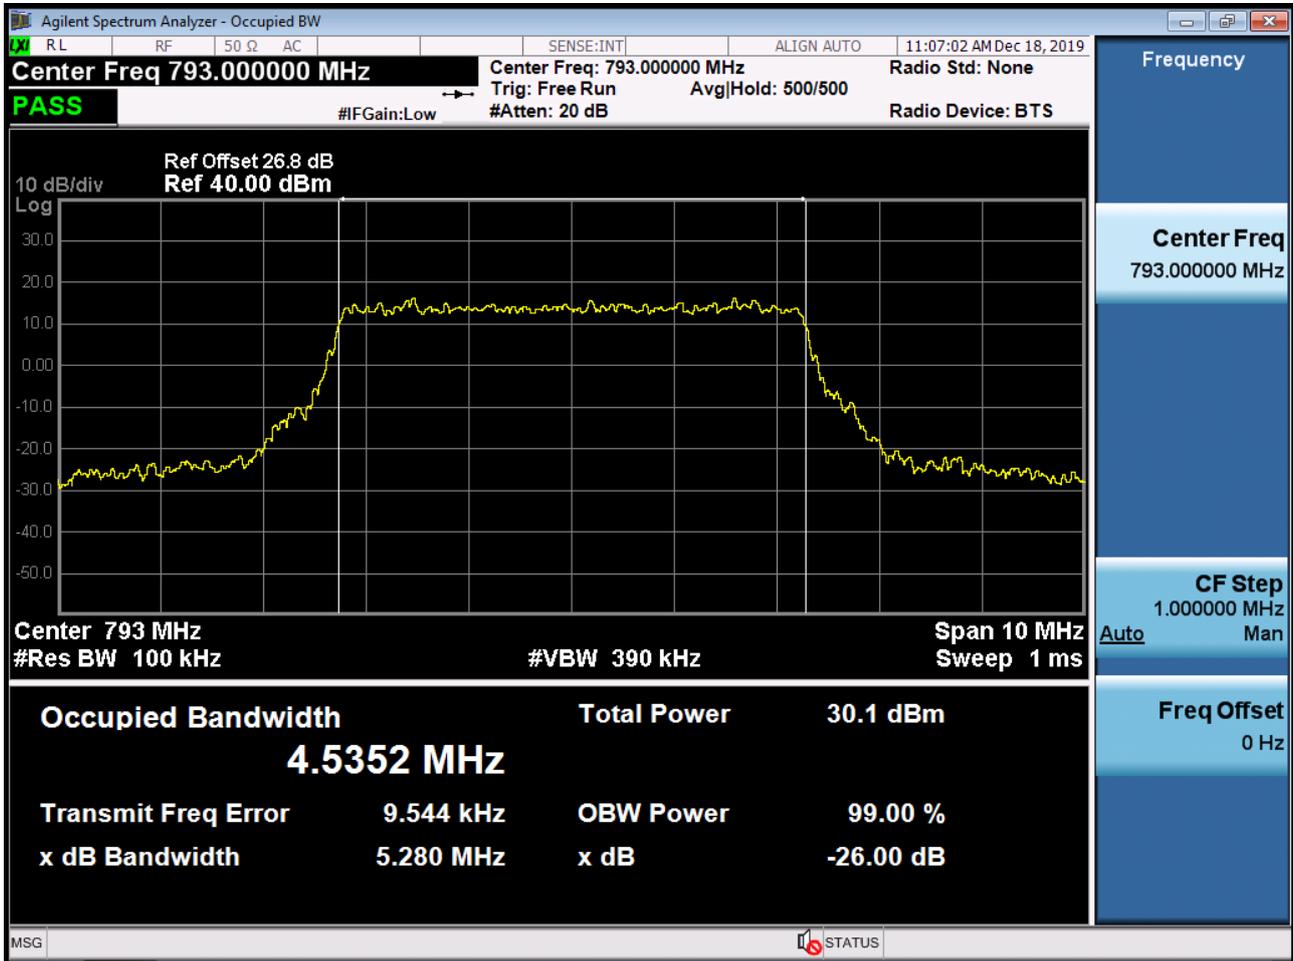


BAND 14. Occupied Bandwidth Plot (Ch.23330 64-QAM RB 25) 5 MHz

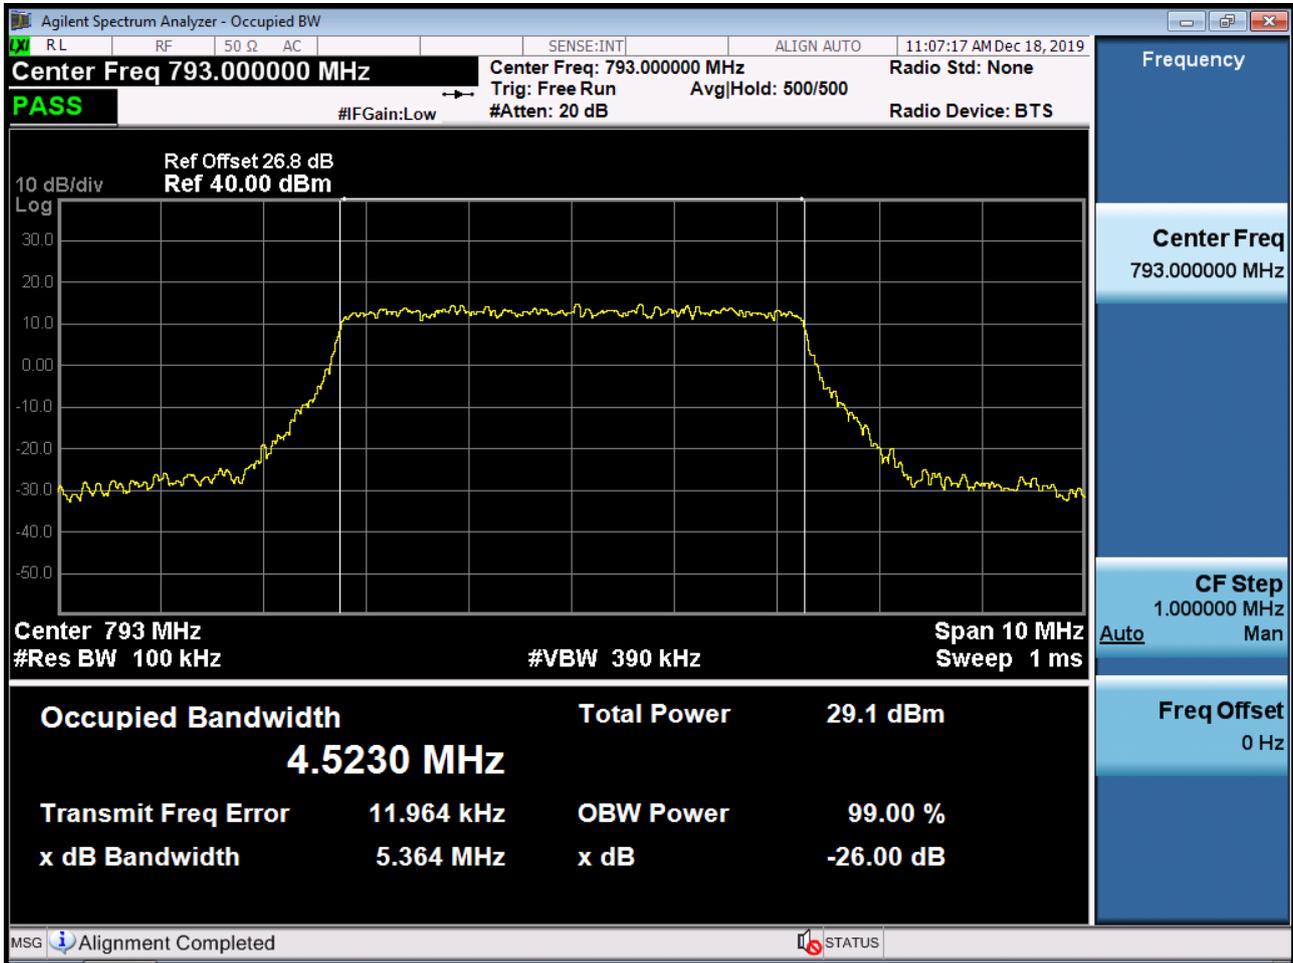


BAND 14. Occupied Bandwidth Plot (Ch.23330 QPSK RB 50) 10 MHz

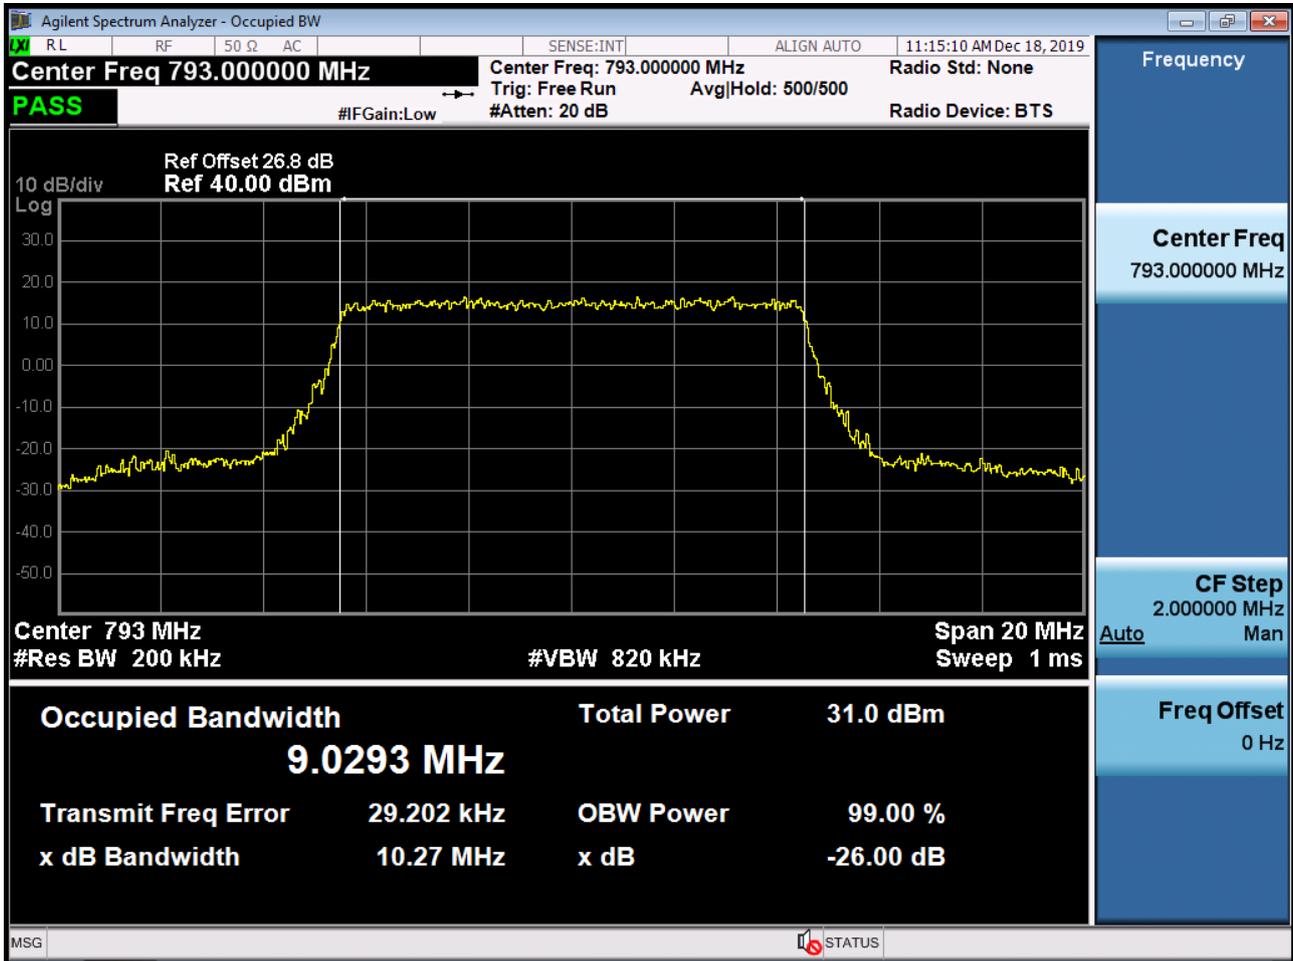


BAND 14. Occupied Bandwidth Plot (Ch.23330 16-QAM RB 50) 10 MHz

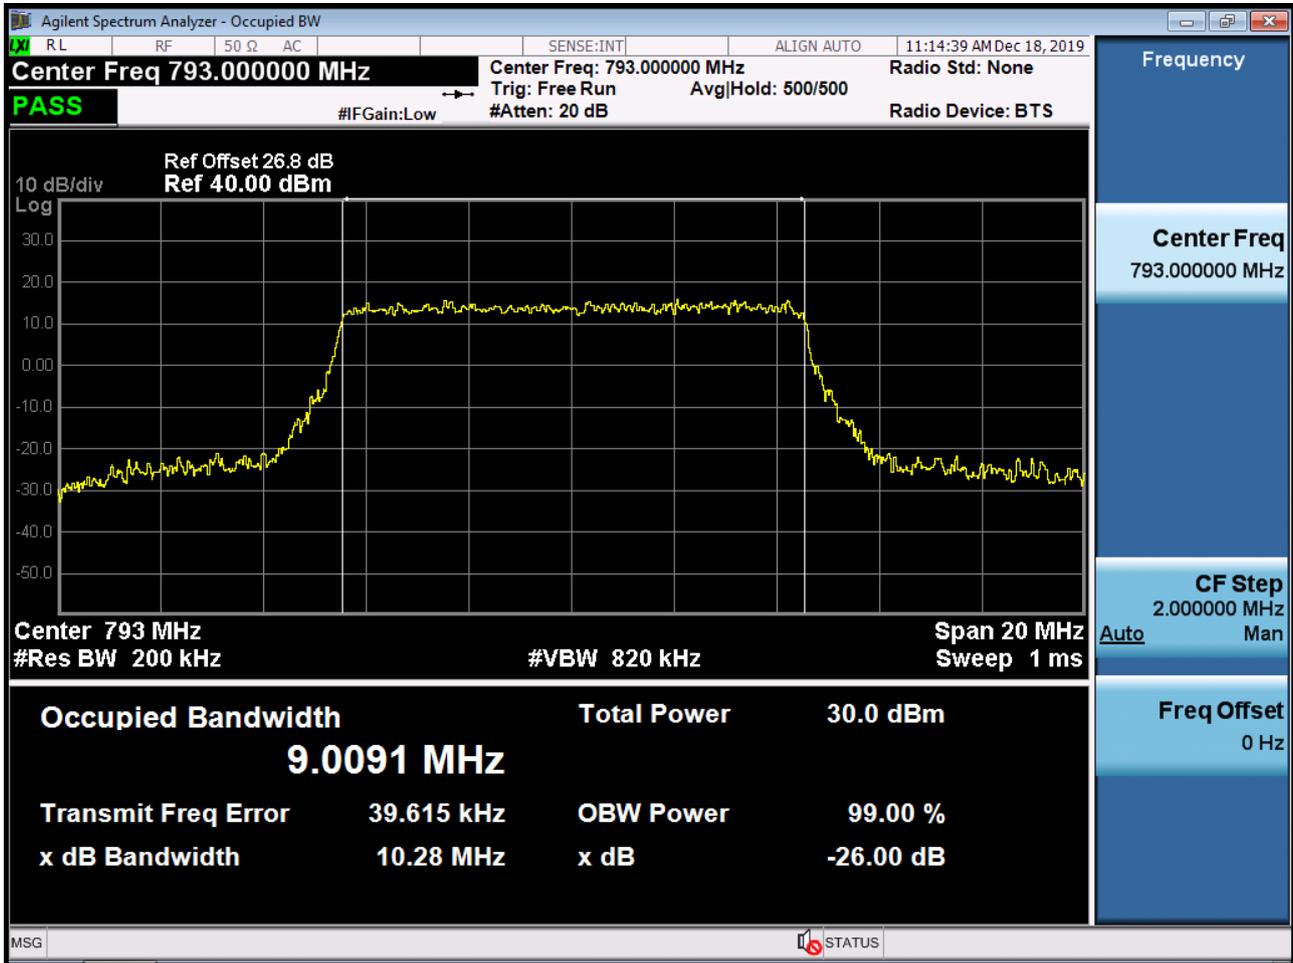


BAND 14. Occupied Bandwidth Plot (Ch.23330 64-QAM RB 50) 10 MHz

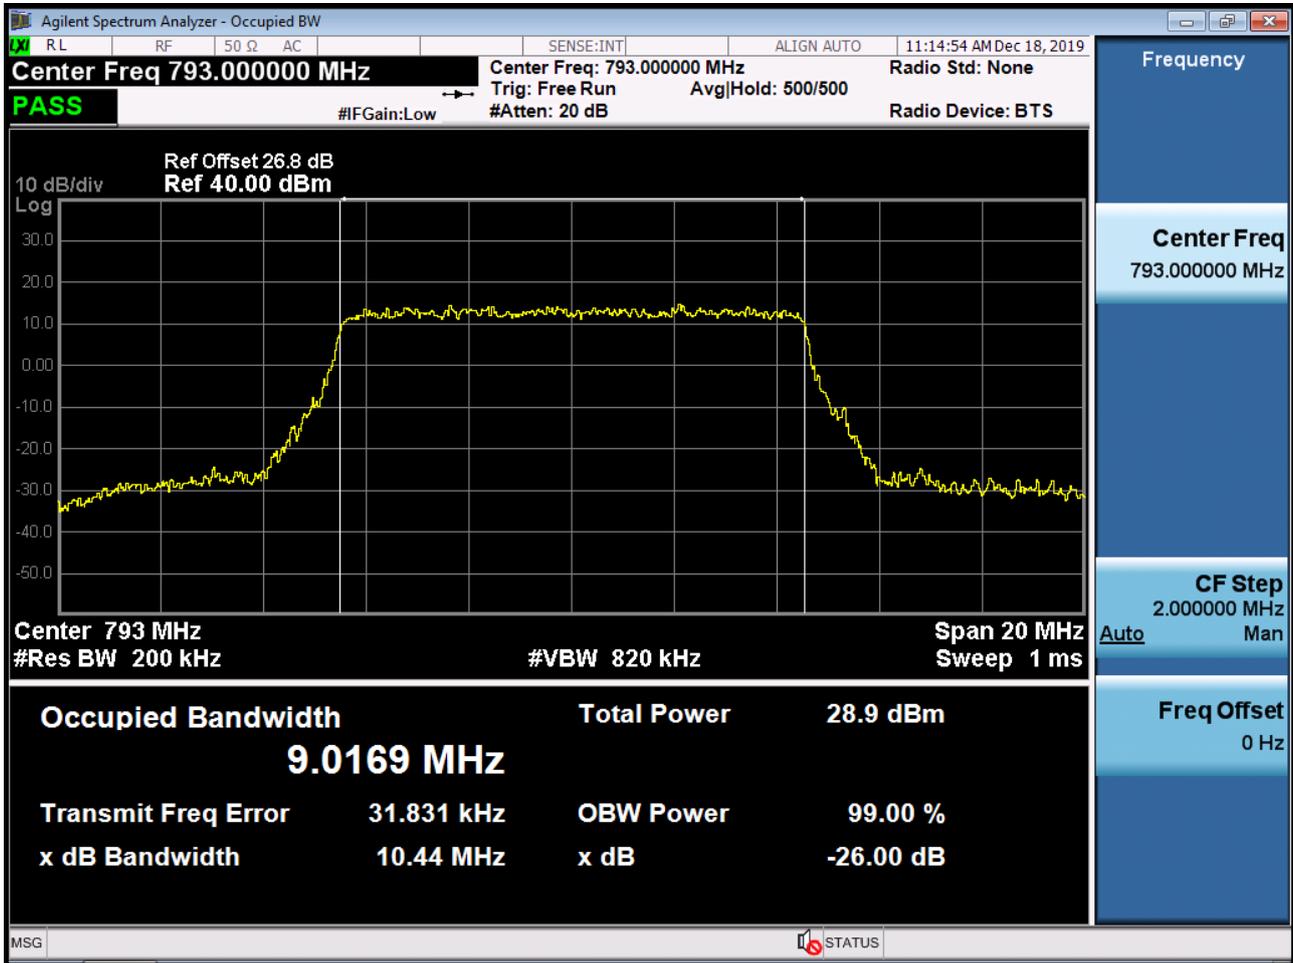


BAND 14 Lower Band Edge Plot (5M BW Ch.23305 QPSK_RB1 OFFSET_0)

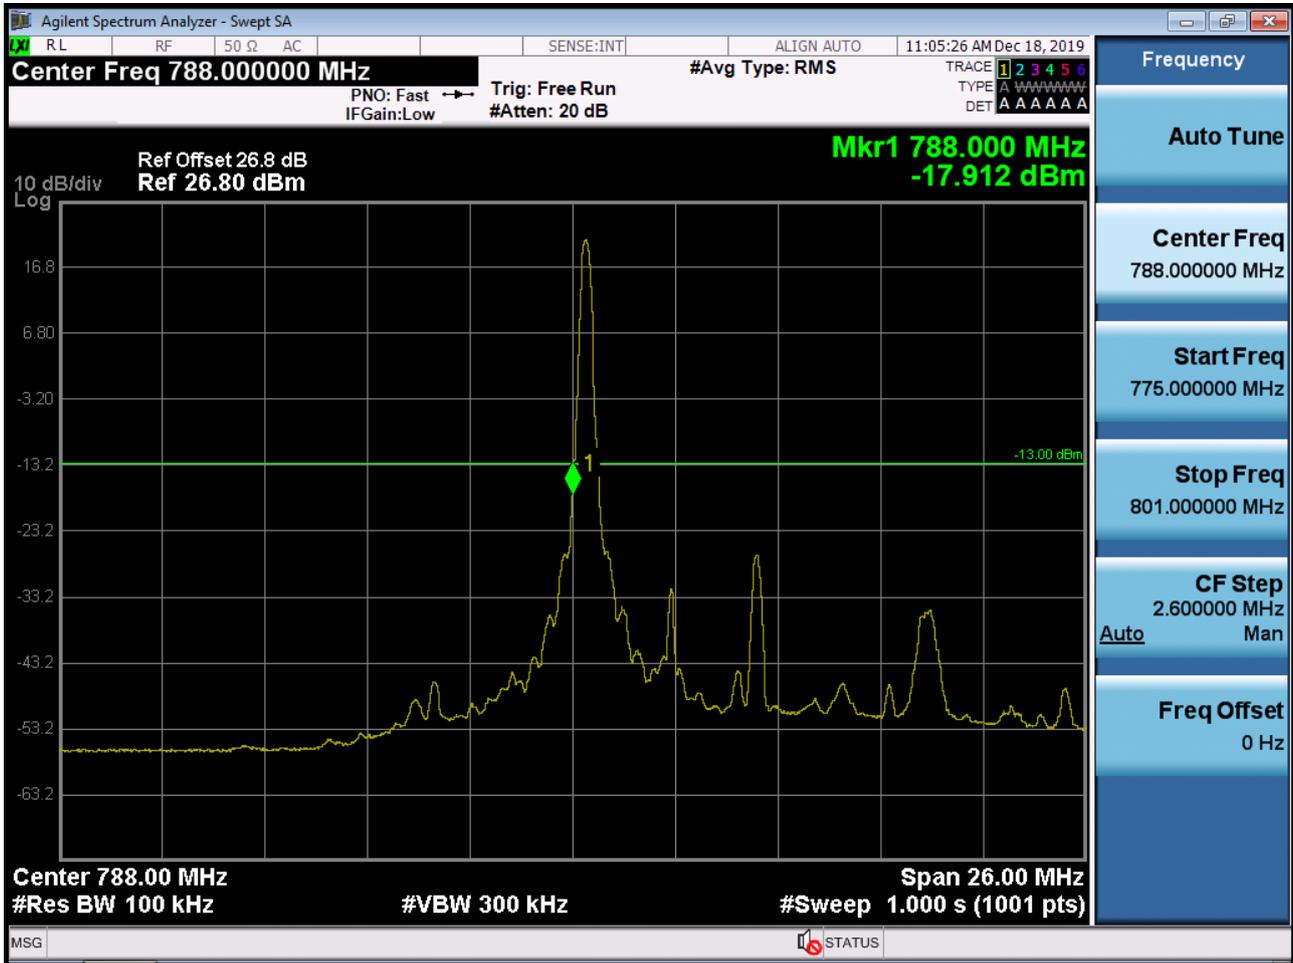


BAND 14 Lower Band Edge Plot (5M BW Ch.23305 QPSK_RB_25)

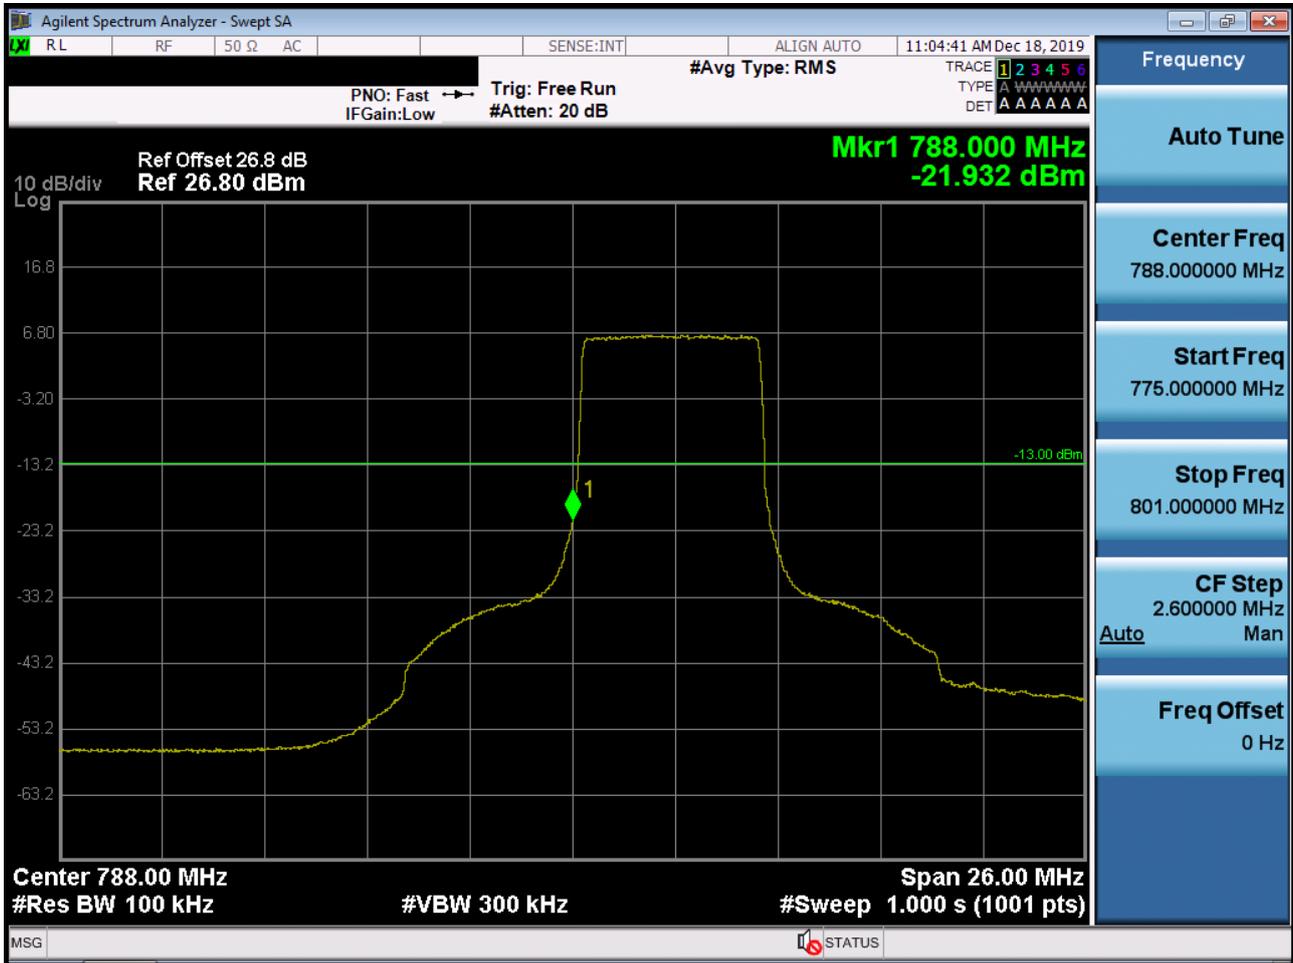


BAND 14 Lower Emission Mask (769 MHz ~ 775 MHz) Plot (5M BW Ch.23305 QPSK_RB1_0)-1

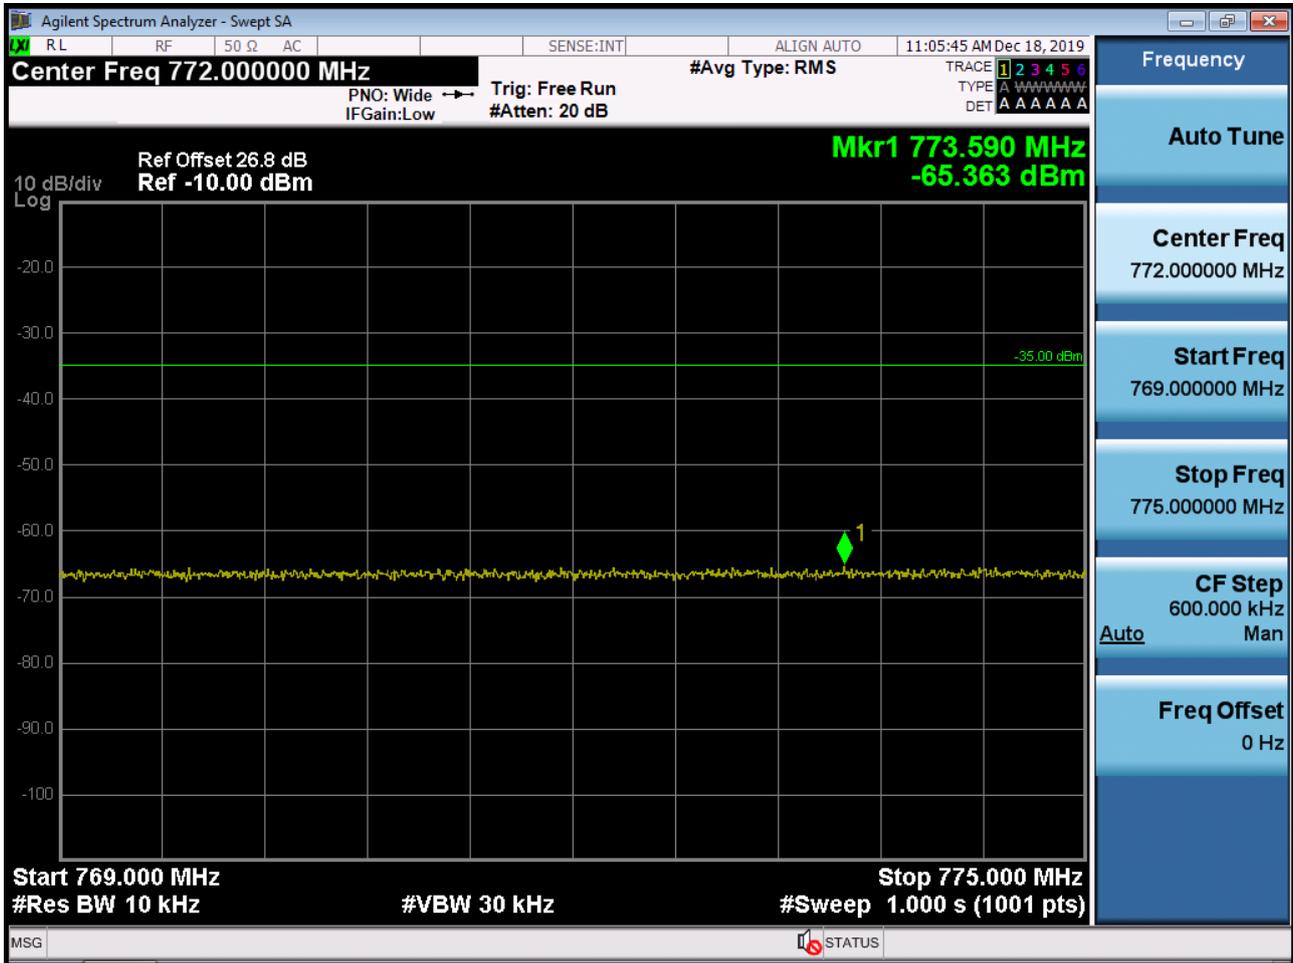

BAND 14 Lower Emission Mask (769 MHz ~ 775 MHz) Plot (5M BW Ch.23305 QPSK_RB25_0)-2

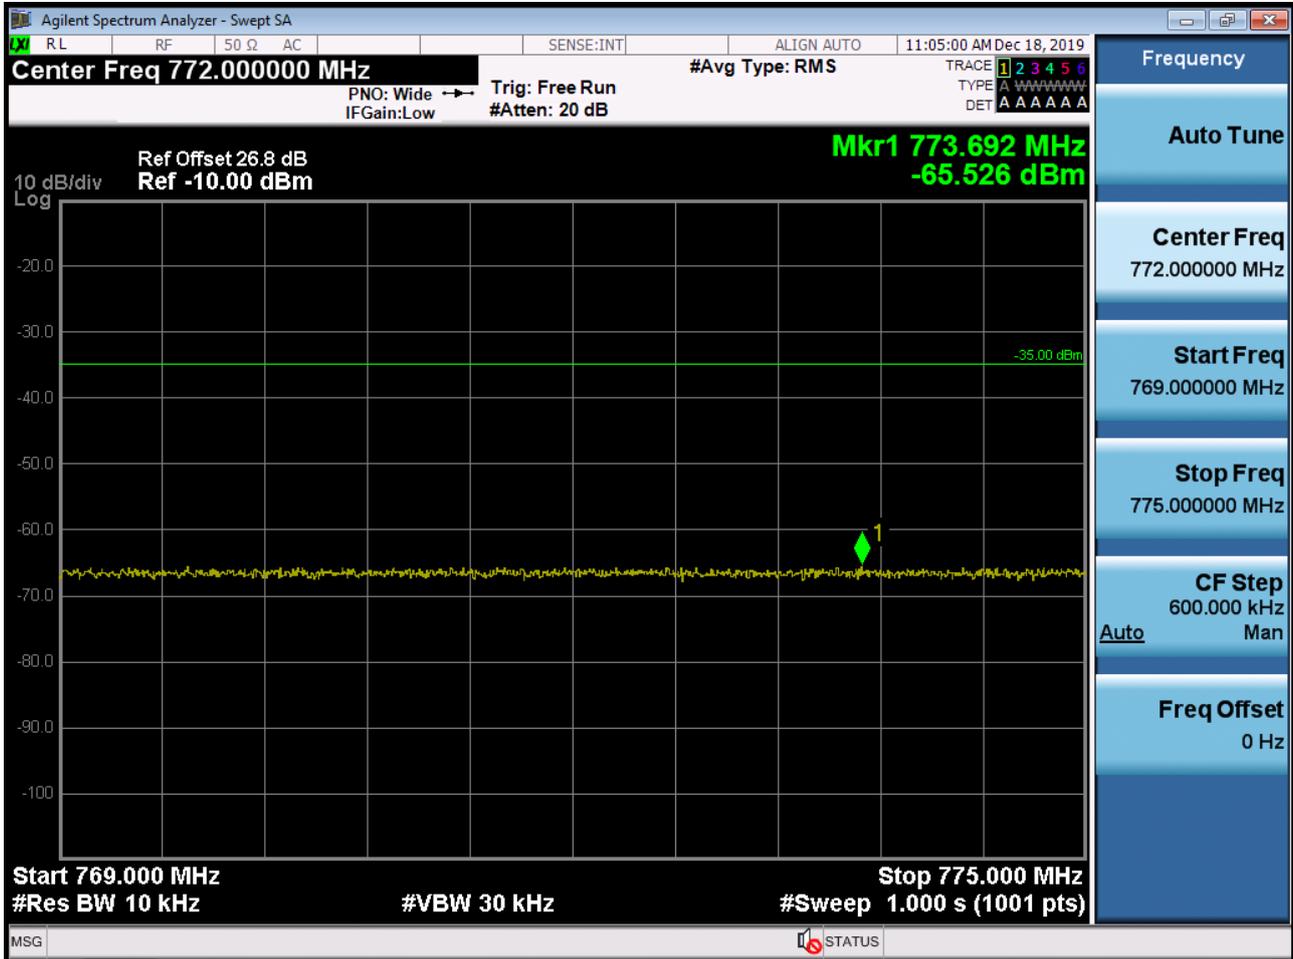


BAND 14 Lower Band Edge Plot (10M BW Ch.23330 QPSK_RB1 OFFSET_0)

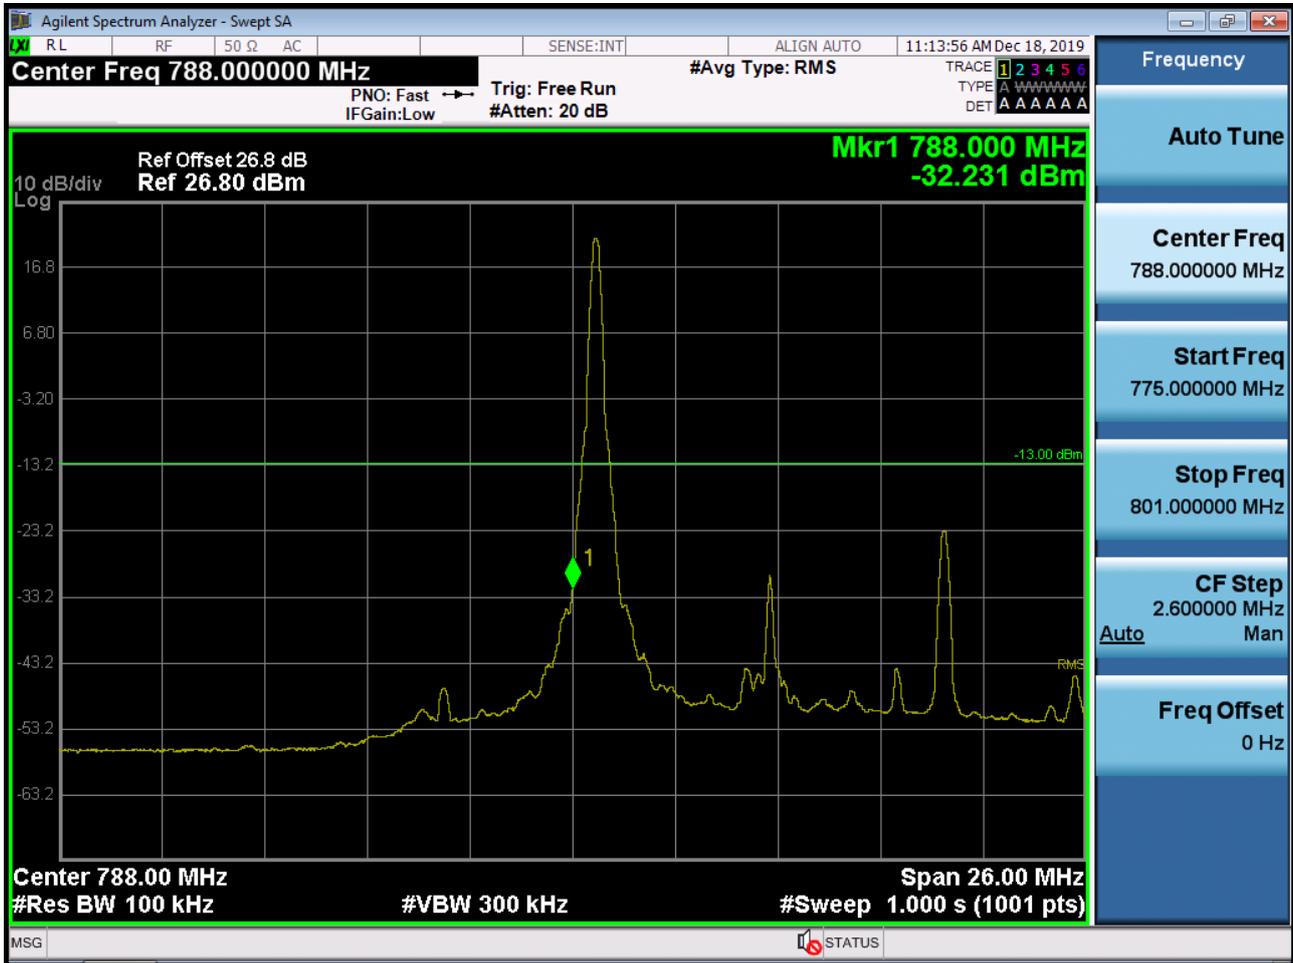


BAND 14. Lower & Upper Band Edge Plot (10M BW Ch.23330 QPSK RB_50)



BAND 14 Lower Emission Mask (769 MHz ~ 775 MHz) Plot (10M BW Ch.23330 QPSK_RB51_0)-1

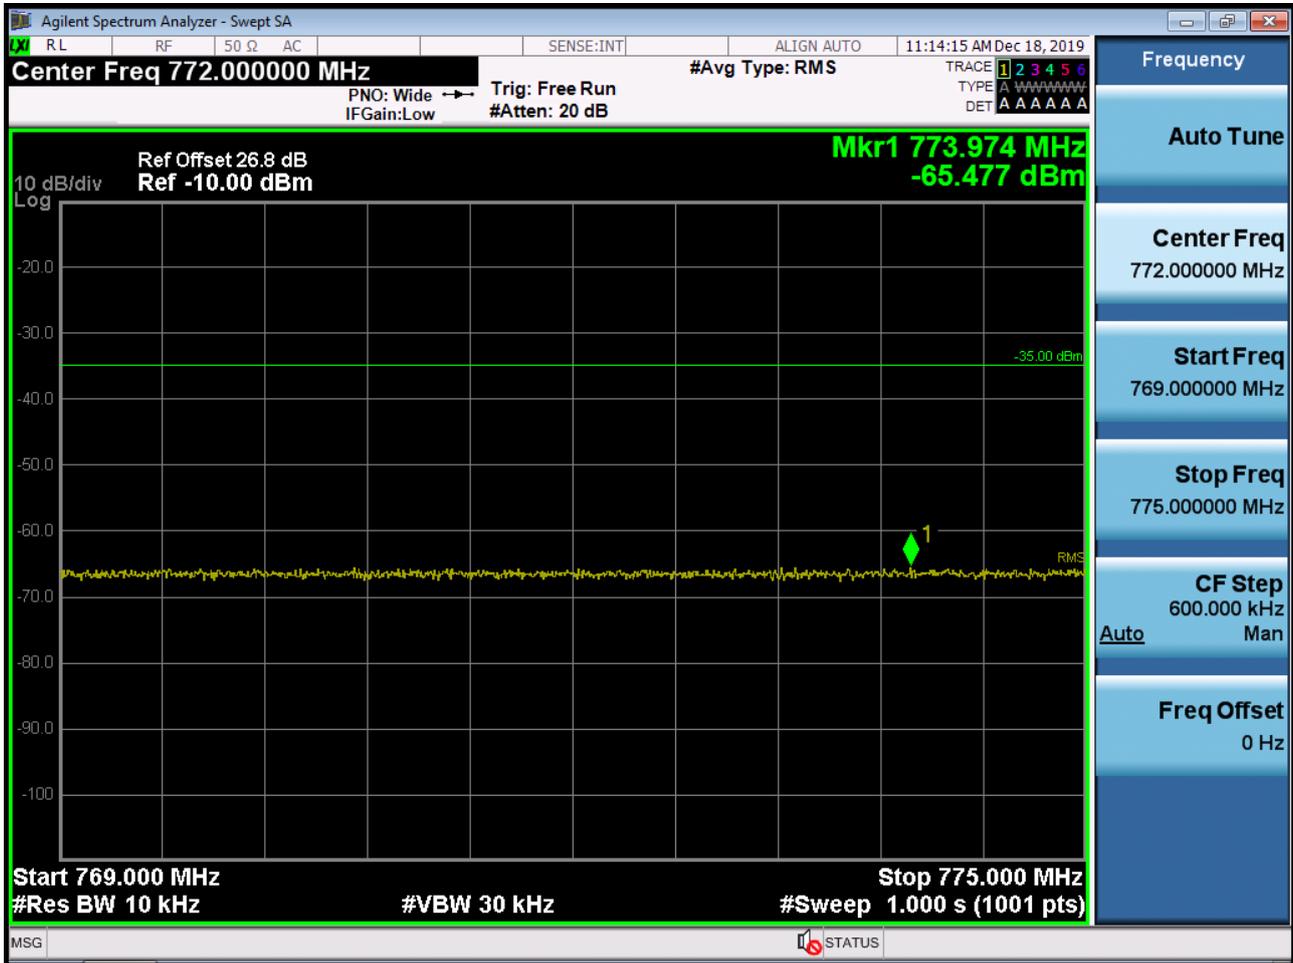

BAND 14 Lower Emission Mask (769 MHz ~ 775 MHz) Plot (10M BW Ch.23330 QPSK_RB50_0)-2

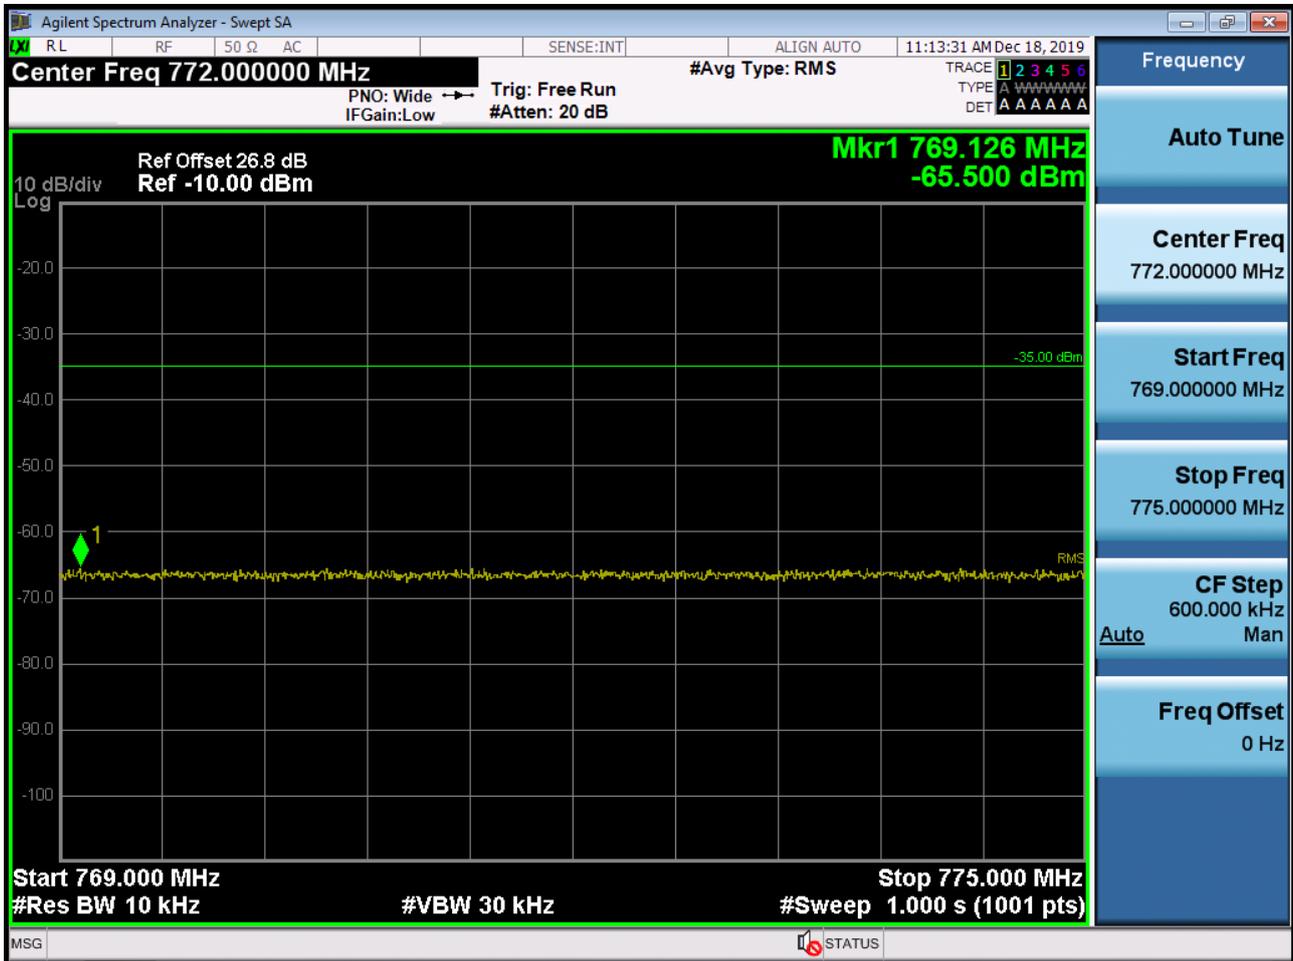

BAND 14 Upper Band Edge Plot (5M BW Ch.23355 QPSK_RB1_Offset 24)



BAND 14 Upper Band Edge Plot (5M BW Ch.23355 QPSK_RB_25)



BAND 14 Upper Emission Mask (799 MHz ~805 MHz) Plot (5M BW Ch.23355 QPSK_RB1_24)



Report No.: HCT-RF-2001-FI015

BAND 14 Upper Emission Mask (799 MHz ~805 MHz) Plot (5M BW Ch.23355 QPSK_RB25_0)-2



BAND 14 Upper Band Edge Plot (10M BW Ch.23330 QPSK_RB1_Offset_49)




BAND 14 Upper Band Edge Plot (10M BW Ch.23330 QPSK_ QPSK_RB_50)




BAND 14 Upper Emission Mask (793 MHz ~805 MHz) Plot (10M BW Ch.23330 QPSK_RB1_49)-1




BAND 14 Upper Emission Mask (793 MHz ~805 MHz) Plot (10M BW Ch.23330 QPSK_RB50_0)-2

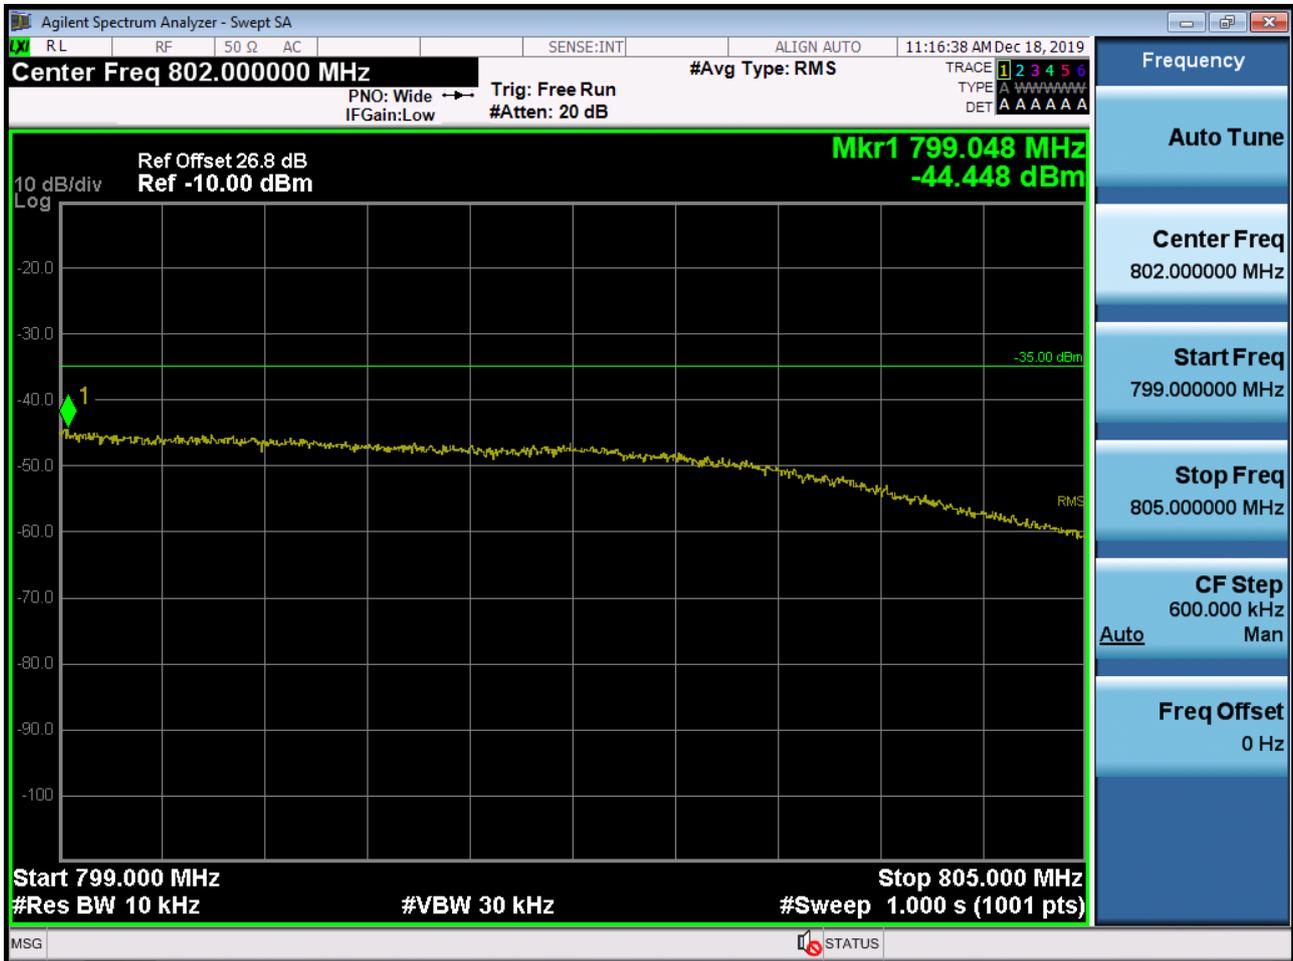


BAND 14. Conducted Spurious Plot (23305ch_5MHz_QPSK_RB 1_0)

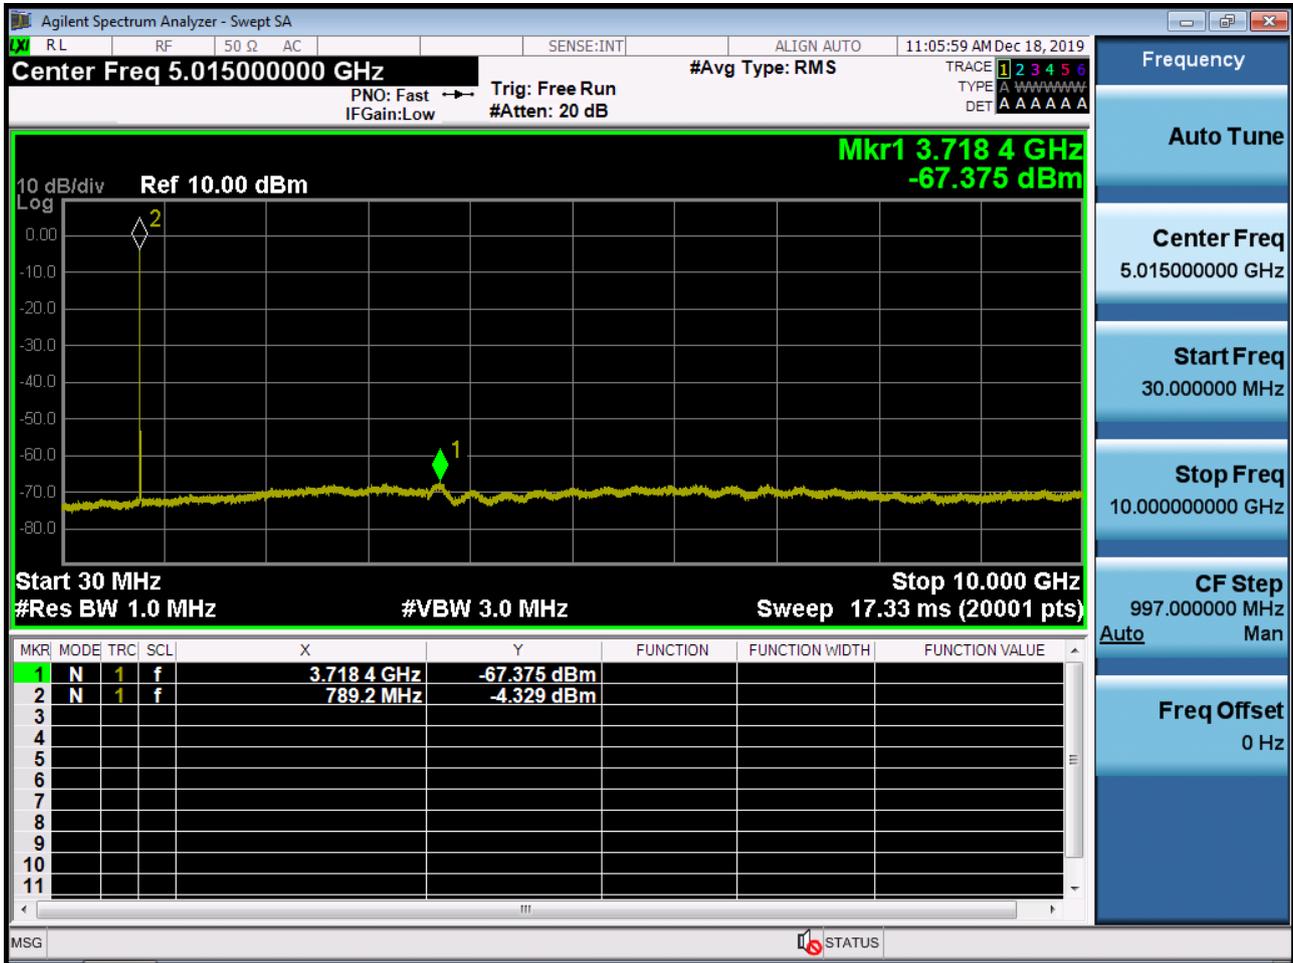


BAND 14. Conducted Spurious Plot (23330ch_5MHz_QPSK_RB 1_0)

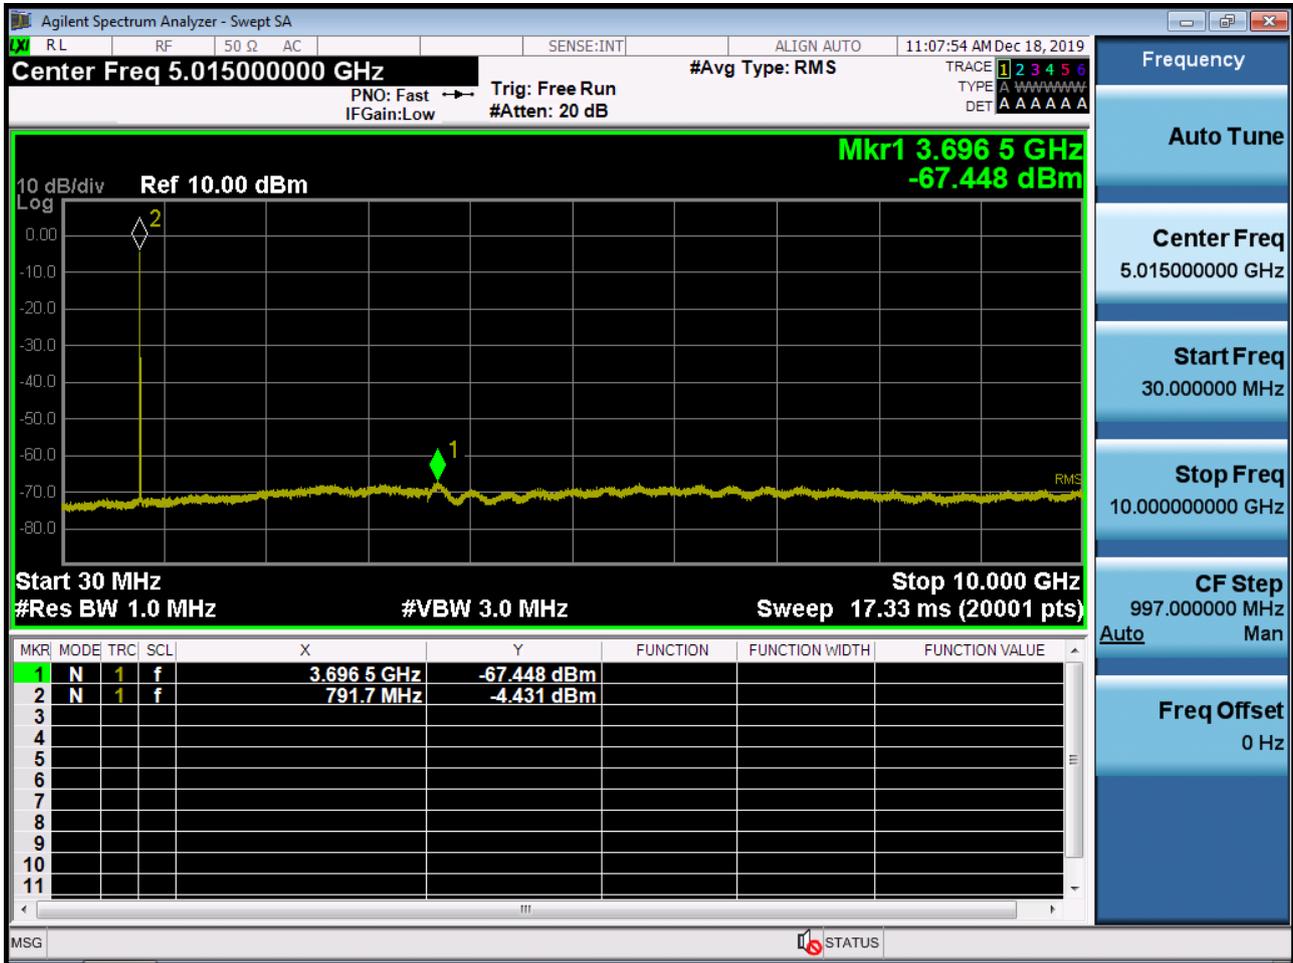

BAND 14. Conducted Spurious Plot (23355ch_5MHz_QPSK_RB 1_0)

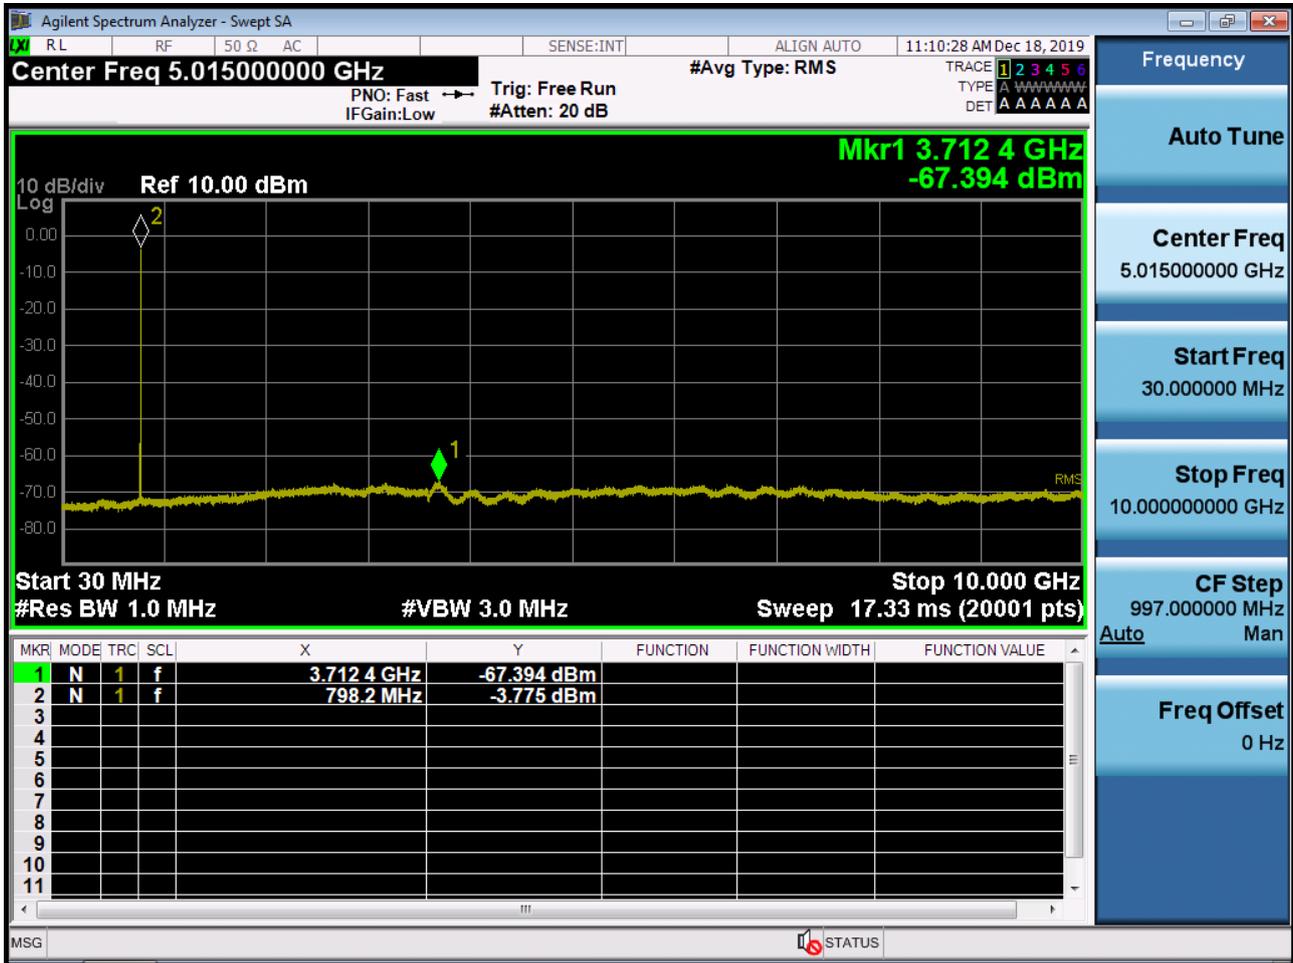

BAND 14. Conducted Spurious Plot (Ch.23330 10 MHz QPSK RB 1, Offset 0)

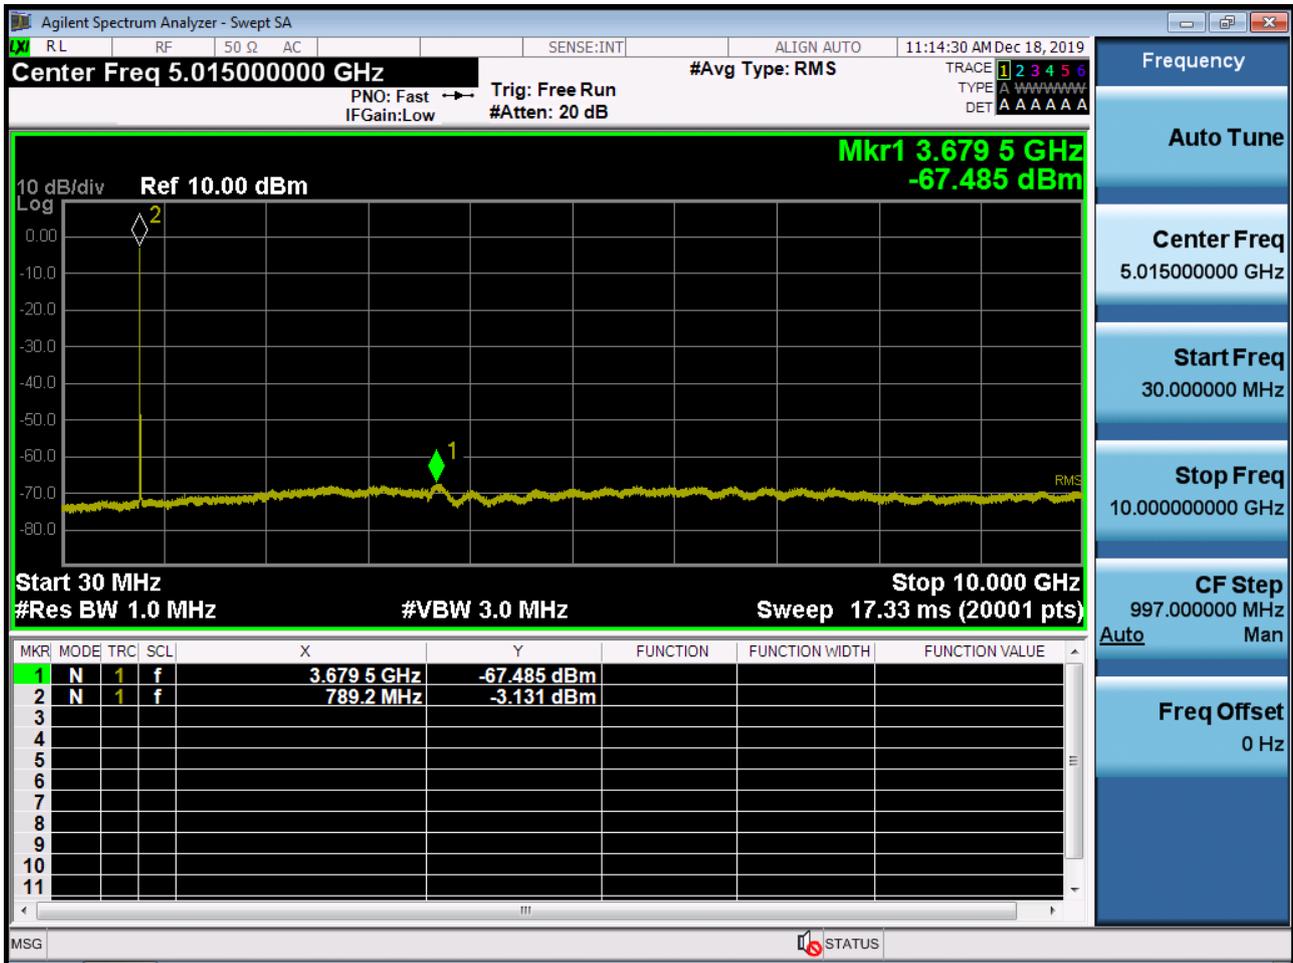

10. APPENDIX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2001-FI015-P