

# FCC LTE REPORT

## Certification

**Applicant Name:**  
SAMSUNG Electronics Co., Ltd.

**Date of Issue:**  
May 10, 2022

**Address:**  
129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

**Location:**  
HCT CO., LTD.,  
74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-2204-FC026-R1

**FCC ID:** A3LSMG736B

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

Model(s): SM-G736B/DS  
 Additional Model(s): SM-G736B  
 EUT Type: Mobile phone  
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)  
 FCC Rule Part(s): §90, §22, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	Conducted Output Power	
				Max. Power (W)	Max. Power (dBm)
LTE – Band26 (1.4)	814.7 – 824.0	1M09G7D	QPSK	0.240	23.81
		1M09W7D	16QAM	0.203	23.08
		1M09W7D	64QAM	0.158	21.99
		1M09W7D	256QAM	0.076	18.83
LTE – Band26 (3)	815.5 – 824.0	2M70G7D	QPSK	0.249	23.96
		2M70W7D	16QAM	0.210	23.22
		2M70W7D	64QAM	0.160	22.03
		2M70W7D	256QAM	0.078	18.90
LTE – Band26 (5)	816.5 – 824.0	4M51G7D	QPSK	0.240	23.81
		4M49W7D	16QAM	0.209	23.21
		4M50W7D	64QAM	0.161	22.06
		4M51W7D	256QAM	0.077	18.84
LTE – Band26 (10)	819.0 – 824.0	8M98G7D	QPSK	0.242	23.84
		8M99W7D	16QAM	0.206	23.13
		8M98W7D	64QAM	0.161	22.06
		9M00W7D	256QAM	0.078	18.92
LTE – Band26 (15)	821.5	13M4G7D	QPSK	0.232	23.66
		13M4W7D	16QAM	0.195	22.91
		13M4W7D	64QAM	0.152	21.82
		13M5W7D	256QAM	0.077	18.88

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998,21 U.S. C.853(a)

Report No.: HCT-RF-2204-FC026-R1

---

REVIEWED BY



---

Report prepared by : Jae Mun Do  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2204-FC026	April 26, 2022	- First Approval Report
HCT-RF-2204-FC026-R1	May 10, 2022	- Revised the Description of eut. (6 page)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

## Table of Contents

REVIEWED BY .....	2
1. GENERAL INFORMATION .....	5
2. INTRODUCTION .....	6
2.1. DESCRIPTION OF EUT.....	6
2.2. MEASURING INSTRUMENT CALIBRATION .....	6
2.3. TEST FACILITY .....	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE .....	7
3.2 CONDUCTED OUTPUT POWER.....	8
3.3 RADIATED POWER.....	9
3.4 RADIATED SPURIOUS EMISSIONS .....	10
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL .....	12
3.7 CHANNEL EDGE.....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(RADIATED TEST) .....	15
3.10 WORST CASE(CONDUCTED TEST) .....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 CONDUCTED OUTPUT POWER.....	22
8.2 EFFECTIVE RADIATED POWER.....	27
8.3 RADIATED SPURIOUS EMISSIONS .....	29
8.4 OCCUPIED BANDWIDTH .....	30
8.5 CONDUCTED SPURIOUS EMISSIONS .....	31
8.6 CHANNEL EDGE.....	31
8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	32
8.8 STADDLE CHANNEL .....	37
8.8.1 CONDUCTED OUTPUT POWER.....	37
8.8.2 EFFECTIVE RADIATED POWER .....	41
8.8.3 RADIATED SPURIOUS EMISSIONS .....	42
8.8.4 CONDUCTED SPURIOUS EMISSIONS .....	43
8.8.5 CHANNEL EDGE(Part90) .....	43
8.8.6 BAND EDGE(Part22) .....	43
9. TEST PLOTS.....	44
10. TEST PLOTS (STRADDLE CHANNEL).....	93
11 ANNEX A_ TEST SETUP PHOTO .....	118

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMG736B
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§90, §22, §2
<b>EUT Type:</b>	Mobile phone
<b>Model(s):</b>	SM-G736B/DS
<b>Additional Model(s):</b>	SM-G736B
<b>Tx Frequency:</b>	814.7 MHz – 823.3 MHz (LTE – Band 26 (1.4 MHz)) 815.5 MHz – 822.5 MHz (LTE – Band 26 (3 MHz)) 816.5 MHz – 821.5 MHz (LTE – Band 26 (5 MHz)) 819.0 MHz (LTE – Band 26 (10 MHz)) 821.5 MHz (LTE – Band 26 (15 MHz))
<b>Date(s) of Tests:</b>	March 29, 2022 ~ April 22, 2022
<b>Serial number:</b>	Radiated: R3CT20ALN1D Conducted: R3CT20AJDKF

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11 a/b/g/n/ac/ax (20/40/80/160), Bluetooth, BT LE, WIFI 6E, NFC.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- KDB 971168 D01 v03r01 - Section 5.2.4 - ANSI C63.26-2015 - Section 5.2.1 & 5.2.4.2
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 CONDUCTED OUTPUT POWER

#### Test Overview


According to ANSI C63.26-2015 Section 5.2.1 when measuring the maximum RF output power from such devices, control over the EUT must be provided either through special test software (provided by manufacturer specifically for compliance testing, but not accessible by an end user) or through use of a base station emulator, communications test set, call box, or similar instrumentation that is capable of establishing a communications link with the EUT to enable control over variable parameters (e.g., output power, OBW, etc.).

In some cases, these instruments also include basic digital spectrum analyzer and/or power meter capabilities that can be utilized to measure the RF output power if the specified detectors and requirements can be realized and the measurement functions have been calibrated.

#### Test Procedure

1. The RF port of the EUT was connected to the Communication Tester via an RF cable.
2. Conducted average power was measured using a calibrated Radio Communication Tester.

#### Test setup

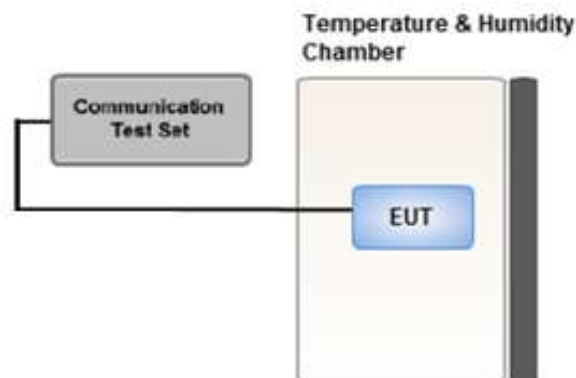



### 3.3 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points  $>$  2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_d \text{ (dBm)} = P_g \text{ (dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference

between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.4 RADIATED SPURIOUS EMISSIONS

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and 1 MHz for emissions above 1 GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_g_{(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where:  $P_g$  is the generator output power into the substitution antenna.

If the fundamental frequency is below 1 GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

### 3.5 OCCUPIED BANDWIDTH.

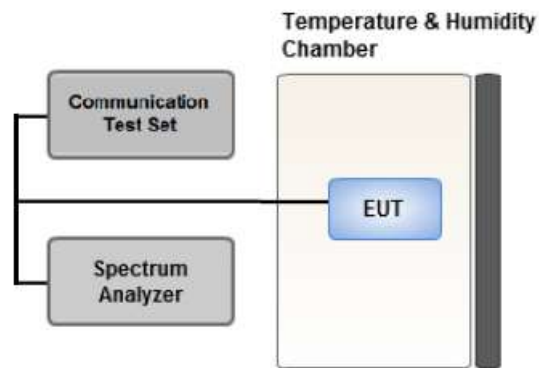

**Test setup**

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### **Test Settings**

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99 % occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

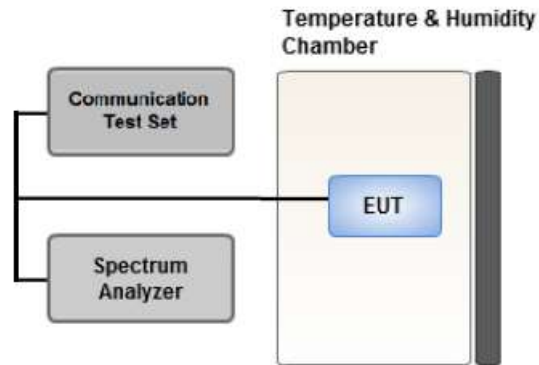

**Test setup**

#### **Test Overview**

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic.


All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### **Test Settings**

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 x Span / RBW

### 3.7 CHANNEL EDGE

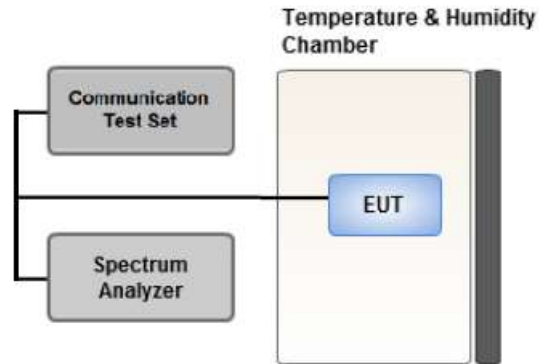

#### Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW :
  - .- EA licensee's frequency block by up to and including 37.5 kHz : 300 Hz
  - .- EA licensee's frequency block greater than 37.5 kHz : 100 kHz
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

#### Test Notes

For 90.691(a), RBW=300 Hz for offset less than 37.5 kHz from channel edge and RBW=100 kHz for offsets greater than 37.5 kHz is allowed.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

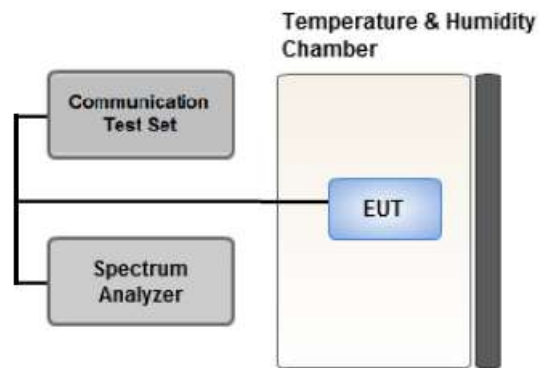

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115% of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.  
 Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)  
 Worst case : Stand alone
- We were performed the RSE test in condition of co-location. There has no significant emission raised.
- WWAN + WLAN 5 GHz + BT (Worst case : Stand alone)
- In the case of radiated spurious emissions, all bandwidth of operation were investigated and the worst case bandwidth results are reported. (Worst case : 3 MHz)
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- All modes of operation were tested and the worst case results are reported.
- Please refer to the table below.
- SM-G736B/DS & additional models were tested and the worst case results are reported.  
 (Worst case : SM-G736B/DS)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	RB size	RB offset	Axis
<b>Effective Isotropic Radiated Power</b>	QPSK, 16QAM, 64QAM, 256QAM	1.4	1	5	X
		3	1	14	
		5	1	24	
		10	1	49	
		15	1	74	
<b>Radiated Spurious and Harmonic Emissions</b>	QPSK	3	1	14	X

### 3.10 WORST CASE(CONDUCTED TEST)

-Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.

- SM-G736B/DS & additional models were tested and the worst case results are reported.

(Worst case : SM-G736B/DS)

[ Worst case ]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM, 256QAM	1.4, 3, 5	High	Full RB	0
	QPSK, 16QAM, 64QAM, 256QAM	10, 15	Mid	Full RB	0
Channel Edge	QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Mid	1	0
				1	49
		15	Mid	1	0
				1	74
1.4, 3, 5	Low, High	Full RB	0		
10, 15	Mid	Full RB	0		
Band Edge (Staddle Channel)	QPSK	1.4	Mid	1	5
		3	Mid	1	14
		5	Mid	1	24
		10	Mid	1	49
		1.4, 3, 5, 10	Mid	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	QPSK	1.4, 3, 5	Low, High	1	0
		10, 15	Mid	1	0



#### 4. LIST OF TEST EQUIPMENT

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
H.P.F	FBSR-02B(WHK1.2/15 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
H.P.F	FBSR-02B(WHK3.3/18 G-10EF)	T&M SYSTEM	-	02/18/2023	Annual
Power Splitter(DC ~ 26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
DC Power Supply	E3632A	Agilent	MY40010147	06/28/2022	Annual
Dipole Antenna	UHAP	Schwarzbeck	557	04/05/2023	Biennial
Dipole Antenna	UHAP	Schwarzbeck	558	04/05/2023	Biennial
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	147	08/30/2022	Biennial
Horn Antenna(1 ~ 18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1298	09/15/2023	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15 ~ 40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Signal Analyzer(10 Hz ~ 26.5 GHz)	N9020A	Agilent	MY52090906	05/18/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz ~ 40 GHz)	FSV40	REOHDE & SCHWARZ	100931	09/29/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Loop Antenna(9 kHz ~ 30 MHz)	FMZB1513	Schwarzbeck	1513-333	03/17/2024	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9168	Schwarzbeck	760	02/22/2023	Biennial
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262116770	07/12/2022	Annual
Wideband Radio Communication Tester	MT8820C	Anritsu Corp.	6200863156	12/29/2022	Annual
SIGNAL GENERATOR (100 kHz ~ 40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz ~ 40.0 GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

**Note:**

1. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
2. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$ )
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$ )

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Channel Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §90.691	< 50 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions within 37.5 kHz of Block Edge	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046 §90.635	< 100 Watts	PASS
Frequency stability / variation of ambient temperature	§2.1055, §90.213 §22.355	< 2.5 ppm	PASS

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP (Only 15 MHz B.W)	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §90.691 §22.917(a)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

## 7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 CONDUCTED OUTPUT POWER

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				814.7 MHz		823.3 MHz		
				dBm	W	dBm	W	
1.4	QPSK	1	0	23.66	0.232	23.67	0.233	100
		1	3	23.77	0.238	23.81	0.240	100
		1	5	23.59	0.229	23.61	0.230	100
		3	0	23.57	0.228	23.60	0.229	100
		3	1	23.69	0.234	23.69	0.234	100
		3	3	23.57	0.228	23.59	0.229	100
		6	0	22.75	0.188	22.76	0.189	100
	16QAM	1	0	22.93	0.196	22.92	0.196	100
		1	3	23.04	0.201	23.08	0.203	100
		1	5	23.02	0.200	23.04	0.201	100
		3	0	22.79	0.190	22.78	0.190	100
		3	1	22.81	0.191	22.79	0.190	100
		3	3	22.70	0.186	22.75	0.188	100
		6	0	21.88	0.154	21.86	0.153	100
	64QAM	1	0	21.98	0.158	21.94	0.156	100
		1	3	21.93	0.156	21.99	0.158	100
		1	5	21.91	0.155	21.92	0.156	100
		3	0	21.84	0.153	21.83	0.152	100
		3	1	21.82	0.152	21.85	0.153	100
		3	3	21.80	0.151	21.91	0.155	100
		6	0	20.72	0.118	20.68	0.117	100
	256QAM	1	0	18.46	0.070	18.47	0.070	100
		1	3	18.79	0.076	18.83	0.076	100
		1	5	18.63	0.073	18.65	0.073	100
		3	0	18.66	0.073	18.66	0.073	100
		3	1	18.68	0.074	18.73	0.075	100
		3	3	18.73	0.075	18.73	0.075	100
		6	0	18.66	0.073	18.65	0.073	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				815.5 MHz		822.5 MHz		
				dBm	W	dBm	W	
3	QPSK	1	0	23.70	0.234	23.72	0.236	100
		1	7	23.95	0.248	23.96	0.249	100
		1	14	23.68	0.233	23.69	0.234	100
		8	0	22.74	0.188	22.75	0.188	100
		8	3	22.88	0.194	22.85	0.193	100
		8	7	22.77	0.189	22.83	0.192	100
		15	0	22.79	0.190	22.78	0.190	100
	16QAM	1	0	22.87	0.194	23.08	0.203	100
		1	7	23.21	0.209	23.22	0.210	100
		1	14	23.00	0.200	23.20	0.209	100
		8	0	21.76	0.150	21.78	0.151	100
		8	3	21.86	0.153	21.86	0.153	100
		8	7	21.80	0.151	21.88	0.154	100
		15	0	21.85	0.153	21.86	0.153	100
	64QAM	1	0	21.96	0.157	21.99	0.158	100
		1	7	21.89	0.155	22.03	0.160	100
		1	14	21.99	0.158	22.02	0.159	100
		8	0	20.95	0.124	20.93	0.124	100
		8	3	20.90	0.123	20.90	0.123	100
		8	7	20.78	0.120	20.92	0.124	100
		15	0	20.77	0.119	20.81	0.121	100
	256QAM	1	0	18.44	0.070	18.75	0.075	100
		1	7	18.79	0.076	18.90	0.078	100
		1	14	18.59	0.072	18.63	0.073	100
		8	0	18.66	0.073	18.65	0.073	100
		8	3	18.70	0.074	18.72	0.074	100
		8	7	18.76	0.075	18.78	0.076	100
		15	0	18.70	0.074	18.65	0.073	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)				Limit (W)
				816.5 MHz		821.5 MHz		
				dBm	W	dBm	W	
5	QPSK	1	0	23.76	0.238	23.81	0.240	100
		1	12	23.72	0.236	23.81	0.240	100
		1	24	23.65	0.232	23.73	0.236	100
		12	0	22.82	0.191	22.72	0.187	100
		12	6	22.75	0.188	22.77	0.189	100
		12	11	22.78	0.190	22.84	0.192	100
		25	0	22.77	0.189	22.77	0.189	100
	16QAM	1	0	23.00	0.200	23.06	0.202	100
		1	12	23.09	0.204	23.13	0.206	100
		1	24	22.89	0.195	23.21	0.209	100
		12	0	21.77	0.150	21.79	0.151	100
		12	6	21.82	0.152	21.82	0.152	100
		12	11	21.82	0.152	21.88	0.154	100
		25	0	21.78	0.151	21.80	0.151	100
	64QAM	1	0	21.87	0.154	22.01	0.159	100
		1	12	21.90	0.155	21.94	0.156	100
		1	24	21.87	0.154	22.06	0.161	100
		12	0	20.80	0.120	20.82	0.121	100
		12	6	20.74	0.119	20.84	0.121	100
		12	11	20.88	0.122	20.92	0.124	100
		25	0	20.73	0.118	20.75	0.119	100
	256QAM	1	0	18.40	0.069	18.45	0.070	100
		1	12	18.83	0.076	18.84	0.077	100
		1	24	18.63	0.073	18.65	0.073	100
		12	0	18.61	0.073	18.63	0.073	100
		12	6	18.69	0.074	18.75	0.075	100
		12	11	18.78	0.076	18.78	0.076	100
		25	0	18.73	0.075	18.64	0.073	100



Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				819 MHz		
				dBm	W	
10	QPSK	1	0	23.69	0.234	100
		1	24	23.72	0.236	100
		1	49	23.84	0.242	100
		25	0	22.59	0.182	100
		25	12	22.76	0.189	100
		25	24	22.81	0.191	100
		50	0	22.77	0.189	100
	16QAM	1	0	23.13	0.206	100
		1	24	22.98	0.199	100
		1	49	22.95	0.197	100
		25	0	21.60	0.145	100
		25	12	21.90	0.155	100
		25	24	21.80	0.151	100
		50	0	21.83	0.152	100
	64QAM	1	0	22.00	0.158	100
		1	24	21.88	0.154	100
		1	49	22.06	0.161	100
		25	0	20.63	0.116	100
		25	12	20.85	0.122	100
		25	24	20.82	0.121	100
		50	0	20.79	0.120	100
	256QAM	1	0	18.49	0.071	100
		1	24	18.92	0.078	100
		1	49	18.70	0.074	100
		25	0	18.70	0.074	100
		25	12	18.80	0.076	100
		25	24	18.83	0.076	100
		50	0	18.79	0.076	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				821.5 MHz		
				dBm	W	
15	QPSK	1	0	23.66	0.232	100
		1	36	23.51	0.224	100
		1	74	23.59	0.229	100
		36	0	22.62	0.183	100
		36	18	22.71	0.187	100
		36	39	22.77	0.189	100
		75	0	22.63	0.183	100
	16QAM	1	0	22.88	0.194	100
		1	36	22.88	0.194	100
		1	74	22.91	0.195	100
		36	0	21.57	0.144	100
		36	18	21.69	0.148	100
		36	39	21.73	0.149	100
		75	0	21.58	0.144	100
	64QAM	1	0	21.79	0.151	100
		1	36	21.82	0.152	100
		1	74	21.79	0.151	100
		36	0	20.64	0.116	100
		36	18	20.72	0.118	100
		36	39	20.64	0.116	100
		75	0	20.59	0.115	100
	256QAM	1	0	18.50	0.071	100
		1	36	18.88	0.077	100
		1	74	18.73	0.075	100
		36	0	18.63	0.073	100
		36	18	18.76	0.075	100
		36	39	18.75	0.075	100
		75	0	18.64	0.073	100

**8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
814.7	LTE B26/ 1.4 MHz	QPSK	-33.10	29.44	-10.29	1.38	H	< 100	0.060	17.77
		16QAM	-33.73	28.81	-10.29	1.38	H		0.052	17.14
		64QAM	-34.73	27.81	-10.29	1.38	H		0.041	16.14
		256QAM	-37.70	24.84	-10.29	1.38	H		0.021	13.17
823.3		QPSK	-32.15	30.90	-10.25	1.39	H		0.084	19.26
		16QAM	-32.79	30.26	-10.25	1.39	H		0.073	18.62
		64QAM	-33.91	29.14	-10.25	1.39	H		0.056	17.50
		256QAM	-36.88	26.17	-10.25	1.39	H		0.028	14.53

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
815.5	LTE B26/ 3 MHz	QPSK	-32.83	29.75	-10.29	1.39	H	< 100	0.064	18.08
		16QAM	-33.49	29.09	-10.29	1.39	H		0.055	17.42
		64QAM	-34.44	28.14	-10.29	1.39	H		0.044	16.47
		256QAM	-37.52	25.06	-10.29	1.39	H		0.022	13.39
822.5		QPSK	-32.05	31.06	-10.26	1.39	H		0.087	19.42
		16QAM	-32.65	30.46	-10.26	1.39	H		0.076	18.82
		64QAM	-33.88	29.23	-10.26	1.39	H		0.057	17.59
		256QAM	-36.86	26.25	-10.26	1.39	H		0.029	14.61

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
816.5	LTE B26/ 5 MHz	QPSK	-32.64	30.05	-10.28	1.39	H	< 100	0.069	18.38
		16QAM	-33.27	29.42	-10.28	1.39	H		0.060	17.75
		64QAM	-34.35	28.34	-10.28	1.39	H		0.046	16.67
		256QAM	-37.38	25.31	-10.28	1.39	H		0.023	13.64
821.5		QPSK	-32.09	30.95	-10.26	1.39	H		0.085	19.30
		16QAM	-32.72	30.32	-10.26	1.39	H		0.074	18.67
		64QAM	-33.95	29.09	-10.26	1.39	H		0.056	17.44
		256QAM	-36.99	26.05	-10.26	1.39	H		0.028	14.40

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
819.0	LTE B26/ 10 MHz	QPSK	-32.11	30.77	-10.27	1.39	H	< 100	0.081	19.11
		16QAM	-32.70	30.18	-10.27	1.39	H		0.071	18.52
		64QAM	-33.92	28.96	-10.27	1.39	H		0.054	17.30
		256QAM	-37.18	25.70	-10.27	1.39	H		0.025	14.04

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
821.5	LTE B26/ 15 MHz	QPSK	-32.10	30.94	-10.26	1.39	H	< 7.00	0.085	19.29
		16QAM	-32.76	30.28	-10.26	1.39	H		0.073	18.63
		64QAM	-33.87	29.17	-10.26	1.39	H		0.057	17.52
		256QAM	-37.04	26.00	-10.26	1.39	H		0.027	14.35

**Note**

1. Limit: None (for reporting purposes only)

**8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26705 (815.5)	1 631.00	-52.84	9.50	-62.80	1.98	V	-55.28	-13.00
	2 446.50	-55.37	10.28	-59.85	2.47	V	-52.03	-13.00
	3 262.00	-57.17	11.86	-58.38	2.88	V	-49.40	-13.00
	4 077.50	-58.16	12.64	-56.79	3.25	H	-47.40	-13.00
	4 893.00	-58.78	12.70	-53.25	3.57	H	-44.12	-13.00
26775 (822.5)	1 645.00	-51.74	9.65	-62.09	1.99	V	-54.42	-13.00
	2 467.50	-55.16	10.46	-59.81	2.47	H	-51.82	-13.00
	3 290.00	-57.33	12.04	-58.73	2.88	V	-49.57	-13.00
	4 112.50	-58.00	12.58	-56.68	3.26	V	-47.36	-13.00
	4 935.00	-58.87	12.70	-53.23	3.59	H	-44.11	-13.00

**8.4 OCCUPIED BANDWIDTH**

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Band 26	1.4 MHz	823.3	QPSK	6	0	1.0893
			16QAM			1.0881
			64QAM			1.0895
			256QAM			1.0861
	3 MHz	822.5	QPSK	15		2.7044
			16QAM			2.6945
			64QAM			2.6952
			256QAM			2.7012
	5 MHz	821.5	QPSK	25		4.5057
			16QAM			4.4886
			64QAM			4.5019
			256QAM			4.5052
	10 MHz	819.0	QPSK	50		8.9793
			16QAM			8.9878
			64QAM			8.9762
			256QAM			8.9980
	15 MHz	821.5	QPSK	75		13.443
			16QAM			13.433
			64QAM			13.437
			256QAM			13.454

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 45 ~ 64.

**8.5 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	814.7	3.8131	27.976	-67.049	-39.073	-13.00
		823.3	3.7653	27.976	-66.724	-38.748	
	3	815.5	3.7732	27.976	-66.230	-38.254	
		822.5	3.7922	27.976	-66.382	-38.406	
	5	816.5	3.7633	27.976	-66.900	-38.924	
		821.5	3.7937	27.976	-65.978	-38.002	
	10	819.0	3.7548	27.976	-66.388	-38.412	
	15	821.5	3.7568	27.976	-66.355	-38.379	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 85 ~ 92.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Ext. Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131


**8.6 CHANNEL EDGE**

- Plots of the EUT's Band Edge are shown Page 65 ~ 84.

**8.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 814,700,000 Hz
- ▣ CHANNEL: 26697(1.4 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	814 700 003	0.0	0.000 000	0.000
100 %		-30	814 700 011	8.1	0.000 001	0.010
100 %		-20	814 700 004	1.6	0.000 000	0.002
100 %		-10	814 700 005	2.4	0.000 000	0.003
100 %		0	814 700 008	5.2	0.000 001	0.006
100 %		+10	814 700 000	-2.4	0.000 000	-0.003
100 %		+30	814 700 007	4.6	0.000 001	0.006
100 %		+40	814 700 008	5.0	0.000 001	0.006
100 %		+50	814 700 008	5.0	0.000 001	0.006
Batt. Endpoint		3.400	+20	814 700 010	6.8	0.000 001

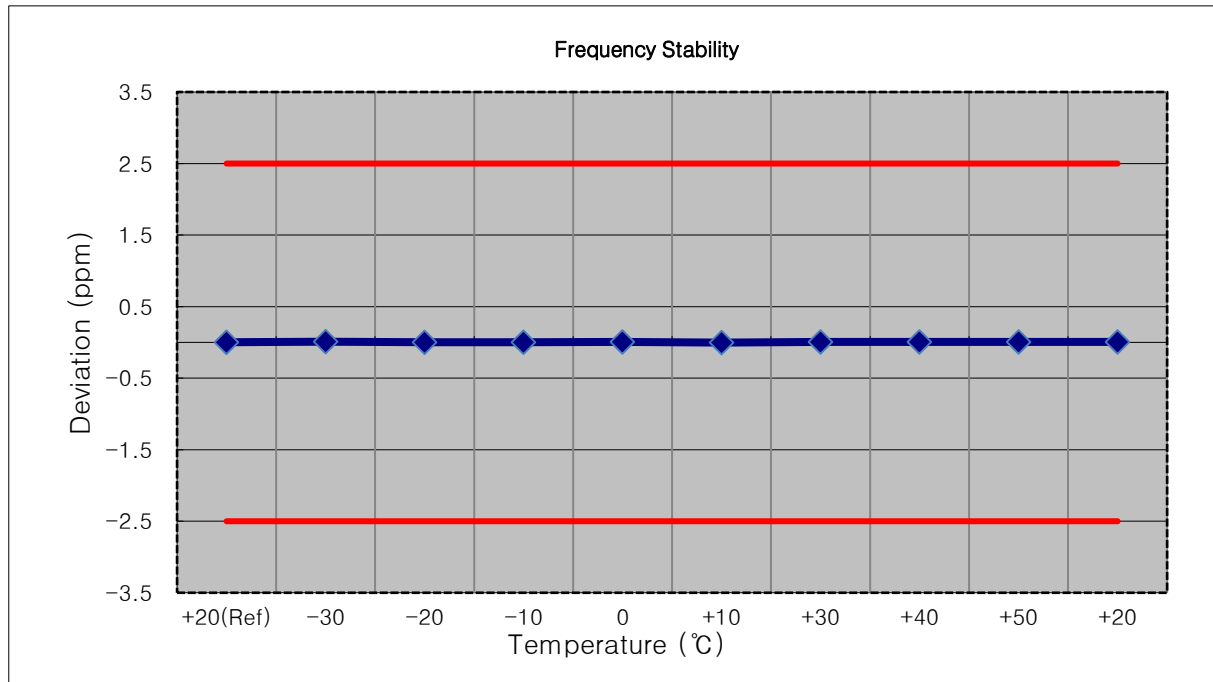




- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 815,500,000 Hz
- ▣ CHANNEL: 26705(3 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	815 499 988	0.0	0.000 000	0.000
100 %		-30	815 499 977	-11.0	-0.000 001	-0.013
100 %		-20	815 499 979	-9.2	-0.000 001	-0.011
100 %		-10	815 499 975	-12.9	-0.000 002	-0.016
100 %		0	815 499 979	-9.3	-0.000 001	-0.011
100 %		+10	815 499 977	-10.8	-0.000 001	-0.013
100 %		+30	815 499 979	-9.1	-0.000 001	-0.011
100 %		+40	815 499 978	-9.9	-0.000 001	-0.012
100 %		+50	815 499 976	-12.0	-0.000 001	-0.015
Batt. Endpoint	3.400	+20	815 499 978	-10.7	-0.000 001	-0.013

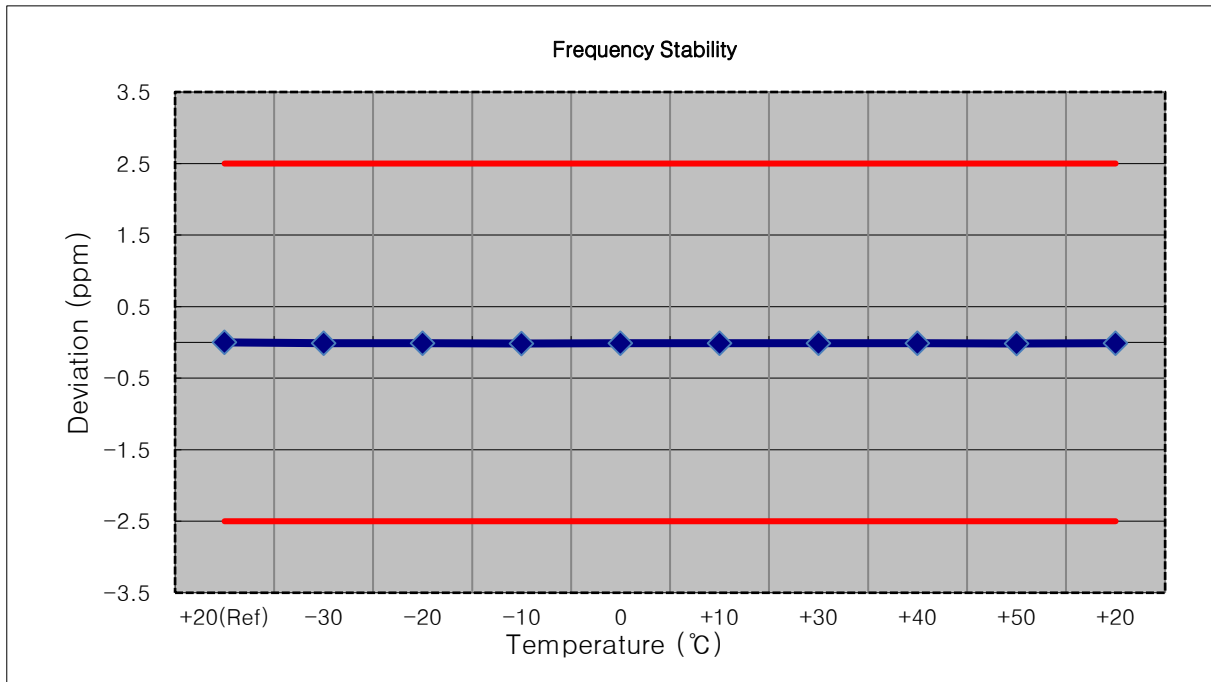


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 816,500,000 Hz
- ▣ CHANNEL: 26715(5 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	816 499 994	0.0	0.000 000	0.000
100 %		-30	816 499 990	-4.5	-0.000 001	-0.006
100 %		-20	816 499 990	-4.2	-0.000 001	-0.005
100 %		-10	816 499 988	-5.7	-0.000 001	-0.007
100 %		0	816 499 988	-6.0	-0.000 001	-0.007
100 %		+10	816 499 988	-6.5	-0.000 001	-0.008
100 %		+30	816 499 989	-5.4	-0.000 001	-0.007
100 %		+40	816 499 989	-5.4	-0.000 001	-0.007
100 %		+50	816 499 989	-5.0	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	816 499 989	-5.5	-0.000 001

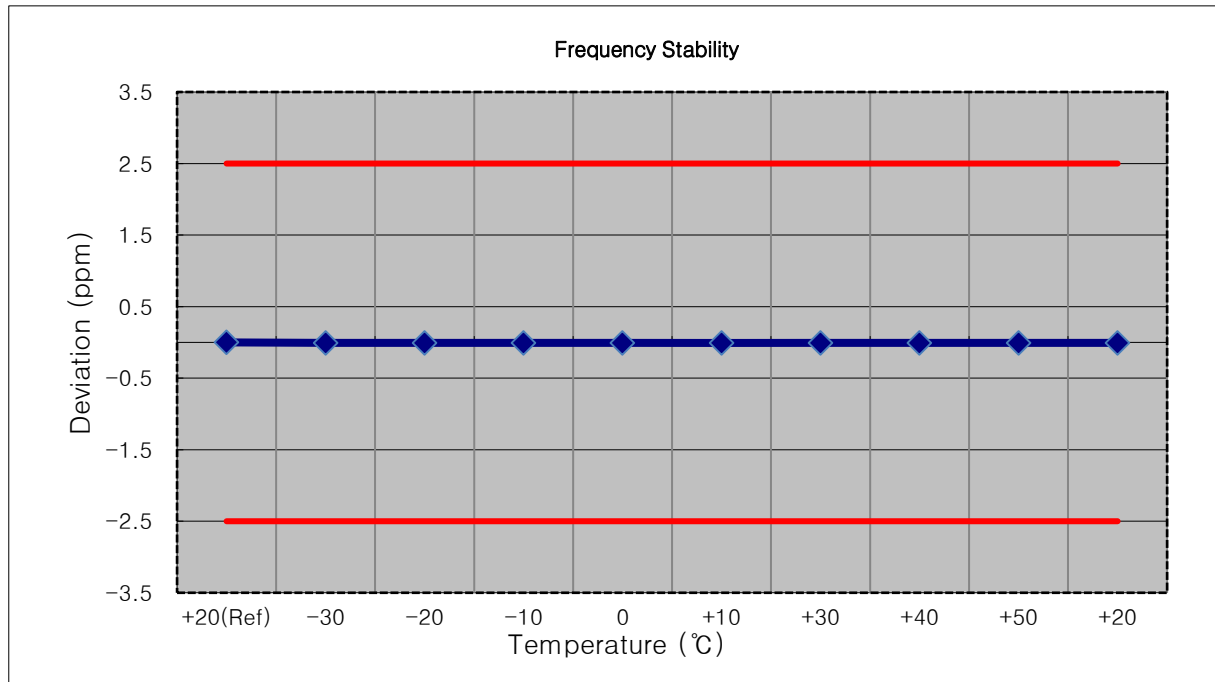


- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 819,000,000 Hz
- ▣ CHANNEL: 26740(10 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	818 999 995	0.0	0.000 000	0.000
100 %		-30	818 999 990	-4.7	-0.000 001	-0.006
100 %		-20	818 999 990	-5.2	-0.000 001	-0.006
100 %		-10	818 999 989	-5.8	-0.000 001	-0.007
100 %		0	818 999 991	-4.0	0.000 000	-0.005
100 %		+10	818 999 988	-6.4	-0.000 001	-0.008
100 %		+30	818 999 991	-4.2	-0.000 001	-0.005
100 %		+40	818 999 990	-5.2	-0.000 001	-0.006
100 %		+50	818 999 990	-4.7	-0.000 001	-0.006
Batt. Endpoint		3.400	+20	818 999 991	-4.1	-0.000 001

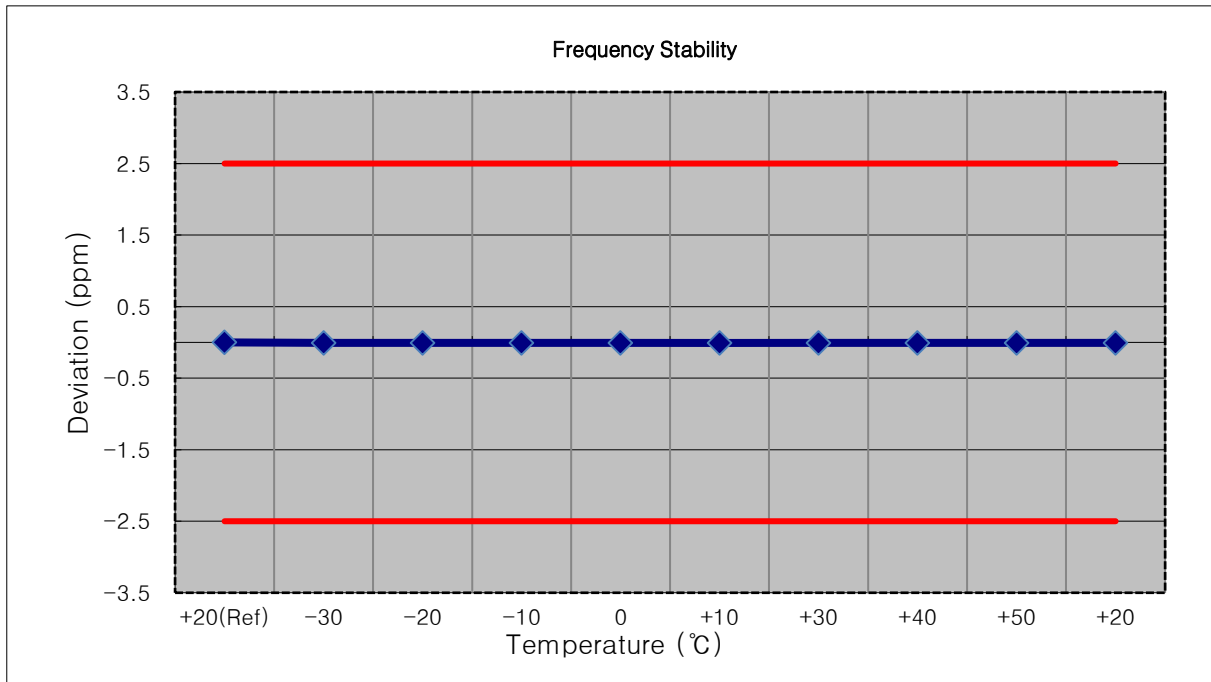

- ▣ MODE: LTE 26
- ▣ OPERATING FREQUENCY: 821,500,000 Hz
- ▣ CHANNEL: 26765(15 MHz)
- ▣ REFERENCE VOLTAGE: 3.860 VDC
- ▣ DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100 %	3.860	+20(Ref)	821 499 992	0.0	0.000 000	0.000
100 %		-30	821 499 985	-7.3	-0.000 001	-0.009
100 %		-20	821 499 988	-4.3	-0.000 001	-0.005
100 %		-10	821 499 985	-7.2	-0.000 001	-0.009
100 %		0	821 499 987	-4.6	-0.000 001	-0.006
100 %		+10	821 499 986	-5.8	-0.000 001	-0.007
100 %		+30	821 499 987	-5.1	-0.000 001	-0.006
100 %		+40	821 499 987	-4.6	-0.000 001	-0.006
100 %		+50	821 499 990	-2.5	0.000 000	-0.003
Batt. Endpoint		3.400	+20	821 499 988	-4.2	-0.000 001

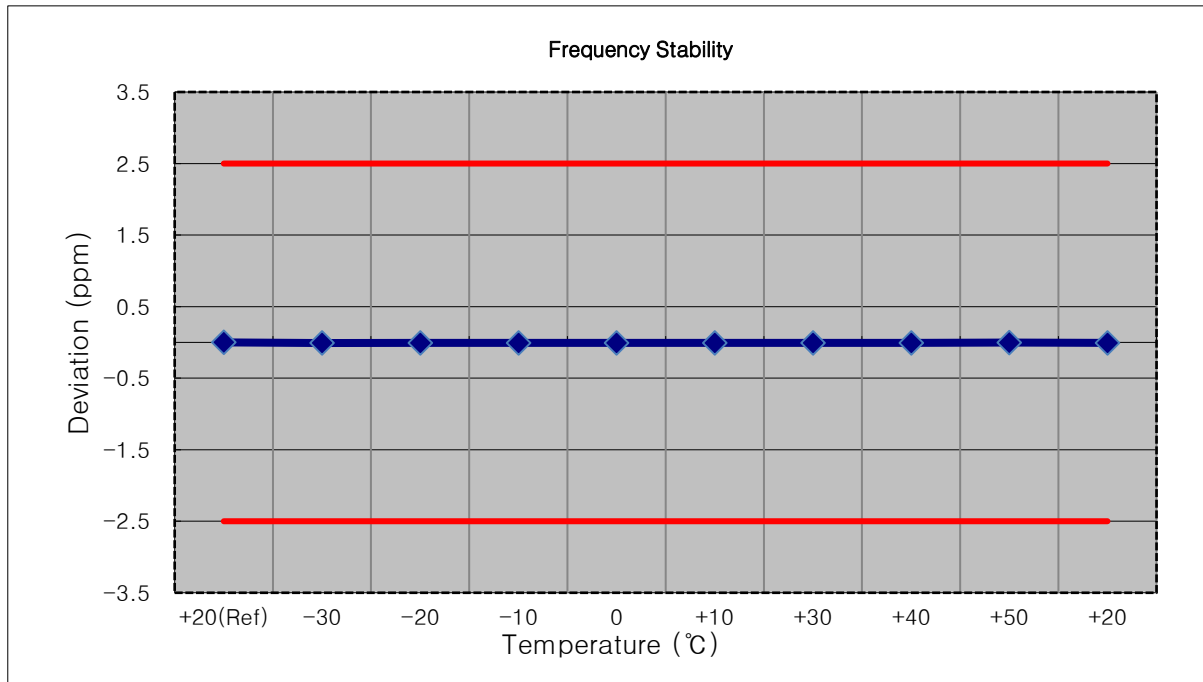

**8.8 STADDLE CHANNEL**

**8.8.1 CONDUCTED OUTPUT POWER**

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
1.4	QPSK	1	0	23.64	0.231	100
		1	3	23.75	0.237	100
		1	5	23.57	0.228	100
		3	0	23.55	0.226	100
		3	1	23.67	0.233	100
		3	3	23.55	0.226	100
		6	0	22.73	0.187	100
	16QAM	1	0	22.91	0.195	100
		1	3	23.01	0.200	100
		1	5	23.00	0.200	100
		3	0	22.77	0.189	100
		3	1	22.79	0.190	100
		3	3	22.68	0.185	100
		6	0	21.86	0.153	100
	64QAM	1	0	21.96	0.157	100
		1	3	21.91	0.155	100
		1	5	21.89	0.155	100
		3	0	21.83	0.152	100
		3	1	21.81	0.152	100
		3	3	21.78	0.151	100
		6	0	20.70	0.117	100
	256QAM	1	0	18.44	0.070	100
		1	3	18.77	0.075	100
		1	5	18.61	0.073	100
		3	0	18.64	0.073	100
		3	1	18.67	0.074	100
		3	3	18.71	0.074	100
		6	0	18.65	0.073	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
3	QPSK	1	0	23.68	0.233	100
		1	7	23.93	0.247	100
		1	14	23.66	0.232	100
		8	0	22.73	0.187	100
		8	3	22.87	0.194	100
		8	7	22.75	0.188	100
		15	0	22.77	0.189	100
	16QAM	1	0	22.86	0.193	100
		1	7	23.20	0.209	100
		1	14	22.99	0.199	100
		8	0	21.74	0.149	100
		8	3	21.84	0.153	100
		8	7	21.78	0.151	100
		15	0	21.83	0.152	100
	64QAM	1	0	21.94	0.156	100
		1	7	21.87	0.154	100
		1	14	21.97	0.157	100
		8	0	20.93	0.124	100
		8	3	20.88	0.122	100
		8	7	20.75	0.119	100
		15	0	20.75	0.119	100
	256QAM	1	0	18.41	0.069	100
		1	7	18.77	0.075	100
		1	14	18.56	0.072	100
		8	0	18.64	0.073	100
		8	3	18.68	0.074	100
		8	7	18.74	0.075	100
		15	0	18.68	0.074	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
5	QPSK	1	0	23.74	0.237	100
		1	12	23.70	0.234	100
		1	24	23.63	0.231	100
		12	0	22.80	0.191	100
		12	6	22.73	0.187	100
		12	11	22.77	0.189	100
		25	0	22.75	0.188	100
	16QAM	1	0	22.98	0.199	100
		1	12	23.07	0.203	100
		1	24	22.87	0.194	100
		12	0	21.75	0.150	100
		12	6	21.80	0.151	100
		12	11	21.80	0.151	100
		25	0	21.75	0.150	100
	64QAM	1	0	21.84	0.153	100
		1	12	21.86	0.153	100
		1	24	21.85	0.153	100
		12	0	20.78	0.120	100
		12	6	20.73	0.118	100
		12	11	20.86	0.122	100
		25	0	20.70	0.117	100
	256QAM	1	0	18.38	0.069	100
		1	12	18.80	0.076	100
		1	24	18.60	0.072	100
		12	0	18.59	0.072	100
		12	6	18.67	0.074	100
		12	11	18.75	0.075	100
		25	0	18.70	0.074	100

Band Width	Modulation	RB Size	RB Offset	Max. output power(dBm)		Limit (W)
				824 MHz		
				dBm	W	
10	QPSK	1	0	23.65	0.232	100
		1	24	23.68	0.233	100
		1	49	23.81	0.240	100
		25	0	22.55	0.180	100
		25	12	22.71	0.187	100
		25	24	22.77	0.189	100
		50	0	22.71	0.187	100
	16QAM	1	0	23.08	0.203	100
		1	24	22.95	0.197	100
		1	49	22.91	0.195	100
		25	0	21.54	0.143	100
		25	12	21.84	0.153	100
		25	24	21.75	0.150	100
		50	0	21.68	0.147	100
	64QAM	1	0	21.94	0.156	100
		1	24	21.84	0.153	100
		1	49	22.00	0.158	100
		25	0	20.58	0.114	100
		25	12	20.80	0.120	100
		25	24	20.75	0.119	100
		50	0	20.73	0.118	100
	256QAM	1	0	18.45	0.070	100
		1	24	18.84	0.077	100
		1	49	18.61	0.073	100
		25	0	18.63	0.073	100
		25	12	18.73	0.075	100
		25	24	18.77	0.075	100
		50	0	18.72	0.074	100



**8.8.2 EFFECTIVE RADIATED POWER**

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
824.0	LTE B26/ 1.4 MHz	QPSK	-32.08	30.85	-10.25	1.39	H	< 7.00	0.083	19.21
		16QAM	-32.70	30.23	-10.25	1.39	H		0.072	18.59
		64QAM	-33.83	29.10	-10.25	1.39	H		0.056	17.46
		256QAM	-36.82	26.11	-10.25	1.39	H		0.028	14.47

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
824.0	LTE B26/ 3 MHz	QPSK	-31.89	31.04	-10.25	1.39	H	< 7.00	0.087	19.40
		16QAM	-32.49	30.44	-10.25	1.39	H		0.076	18.80
		64QAM	-33.70	29.23	-10.25	1.39	H		0.057	17.59
		256QAM	-36.72	26.21	-10.25	1.39	H		0.029	14.57

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
824.0	LTE B26/ 5 MHz	QPSK	-31.94	30.99	-10.25	1.39	H	< 7.00	0.086	19.35
		16QAM	-32.61	30.32	-10.25	1.39	H		0.074	18.68
		64QAM	-33.79	29.14	-10.25	1.39	H		0.056	17.50
		256QAM	-36.82	26.11	-10.25	1.39	H		0.028	14.47

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain (dBd)	C.L	Pol	Limit	ERP	
									W	W
824.0	LTE B26/ 10 MHz	QPSK	-31.91	31.02	-10.25	1.39	H	< 7.00	0.087	19.38
		16QAM	-32.52	30.41	-10.25	1.39	H		0.075	18.77
		64QAM	-33.60	29.33	-10.25	1.39	H		0.059	17.69
		256QAM	-36.87	26.06	-10.25	1.39	H		0.028	14.42

**8.8.3 RADIATED SPURIOUS EMISSIONS**

- ▣ MODE: LTE B26
- ▣ MODULATION SIGNAL: 3 MHz QPSK
- ▣ DISTANCE: 3 meters

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit
26790 (824.0)	1 648.00	-52.14	9.70	-62.46	1.99	H	-54.75	-13.00
	2 472.00	-54.20	10.46	-58.85	2.47	H	-50.86	-13.00
	3 296.00	-57.60	12.07	-59.09	2.89	V	-49.90	-13.00
	4 120.00	-57.67	12.56	-56.19	3.26	V	-46.89	-13.00
	4 944.00	-58.73	12.70	-53.26	3.59	H	-44.15	-13.00

**8.8.4 CONDUCTED SPURIOUS EMISSIONS**

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
26	1.4	824.0	3.7997	27.976	-66.503	-38.527	-13.00
	3		3.7957	27.976	-66.937	-38.961	
	5		3.8091	27.976	-65.835	-37.859	
	10		3.7877	27.976	-66.838	-38.862	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 94 ~ 97.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor (dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20(26.5)	30.131

**8.8.5 CHANNEL EDGE(Part90)**

- Test Channel : 26790(824.0MHz)

Plots of the EUT's Band Edge are shown Page 98 ~ 109.

**8.8.6 BAND EDGE(Part22)**

- Test Channel : 26790(824.0 MHz)

- Plots of the EUT's Band Edge are shown Page 110 ~ 117.

## 9. TEST PLOTS


BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 QPSK RB 6\_0)




BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 16QAM RB 6\_0)



BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 64QAM RB 6\_0)

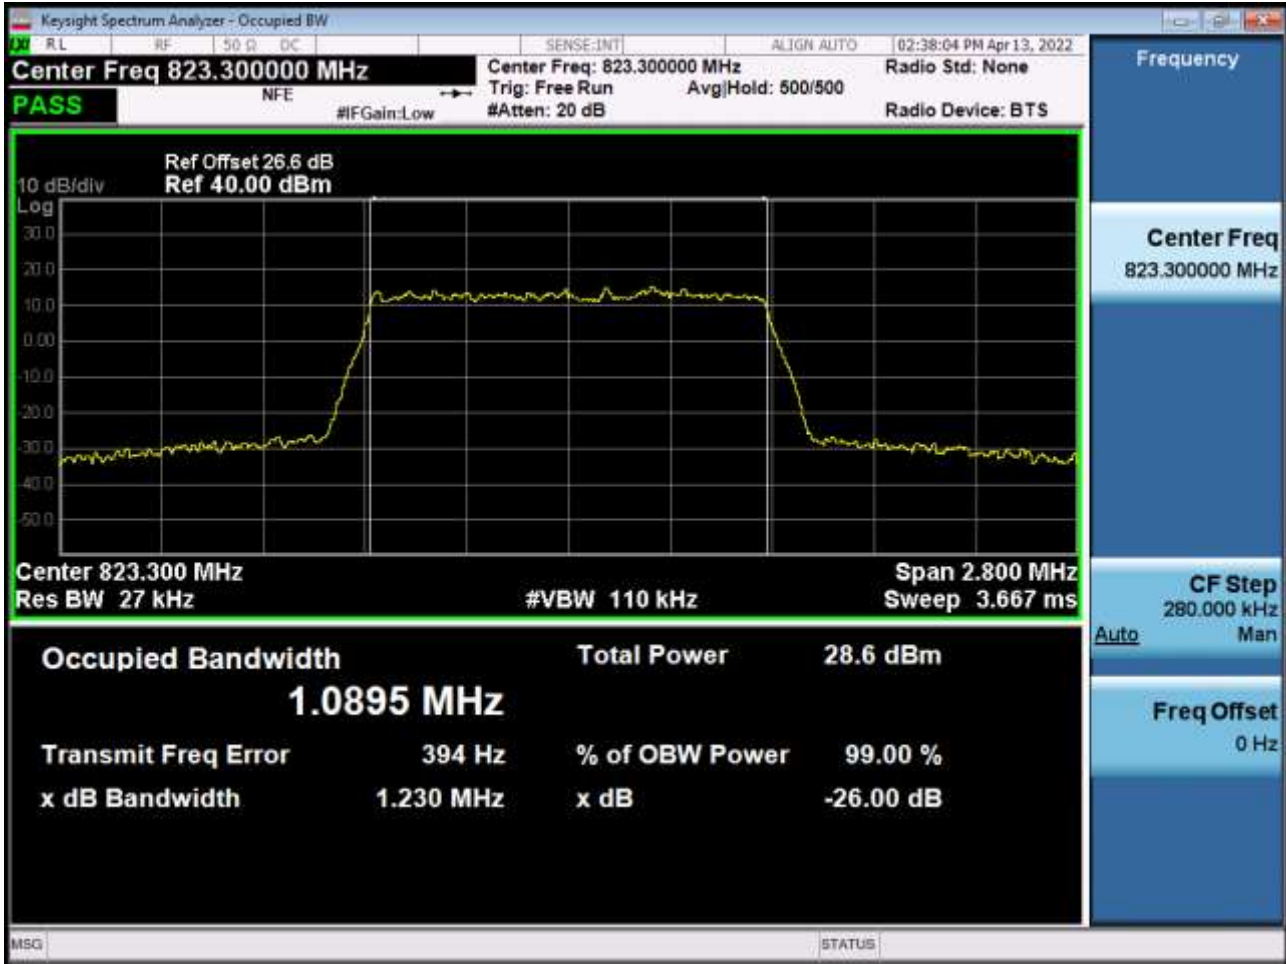

BAND 26. Occupied Bandwidth Plot (1.4 M BW Ch.26783 256QAM RB 6\_0)

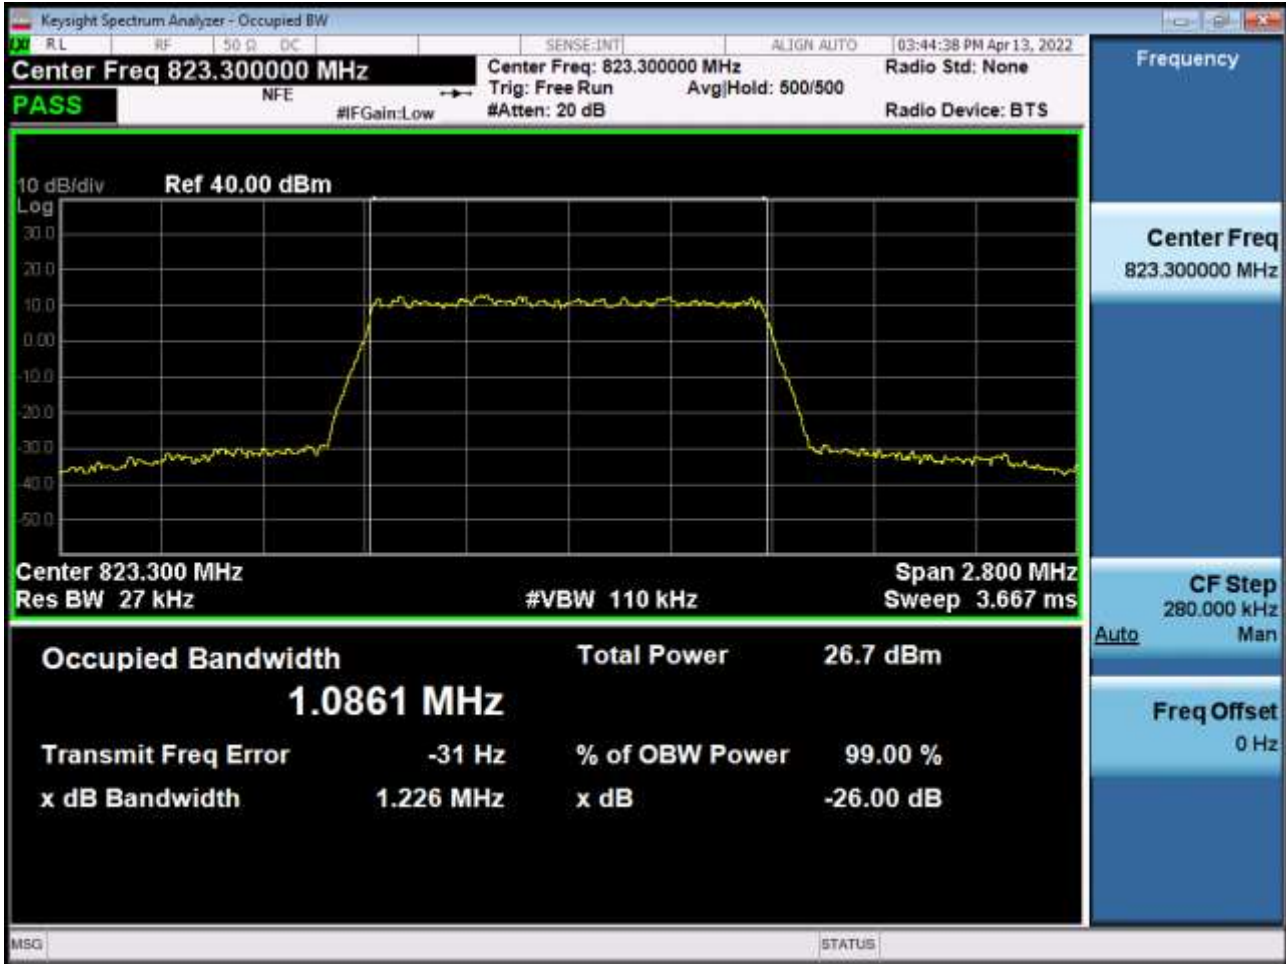



BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 QPSK RB 15\_0)



BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 16QAM RB 15\_0)



BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 64QAM RB 15\_0)



BAND 26. Occupied Bandwidth Plot (3 M BW Ch.26775 256QAM RB 15\_0)



BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 QPSK RB 25\_0)



BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 16QAM RB 25\_0)






BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 64QAM RB 25\_0)



BAND 26. Occupied Bandwidth Plot (5 M BW Ch.26765 256QAM RB 25\_0)

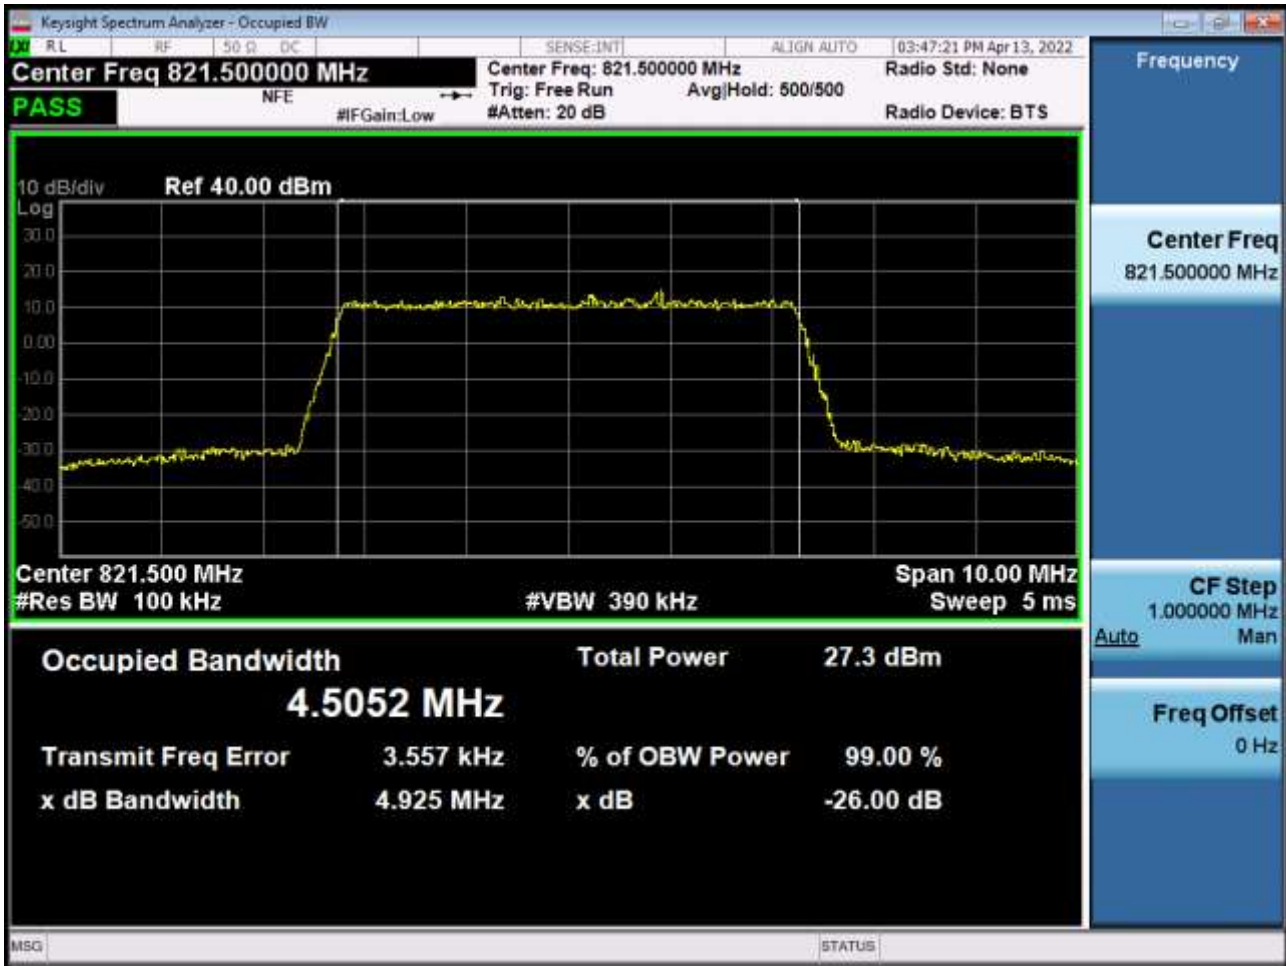




BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 QPSK RB 50\_0)




BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 16QAM RB 50\_0)

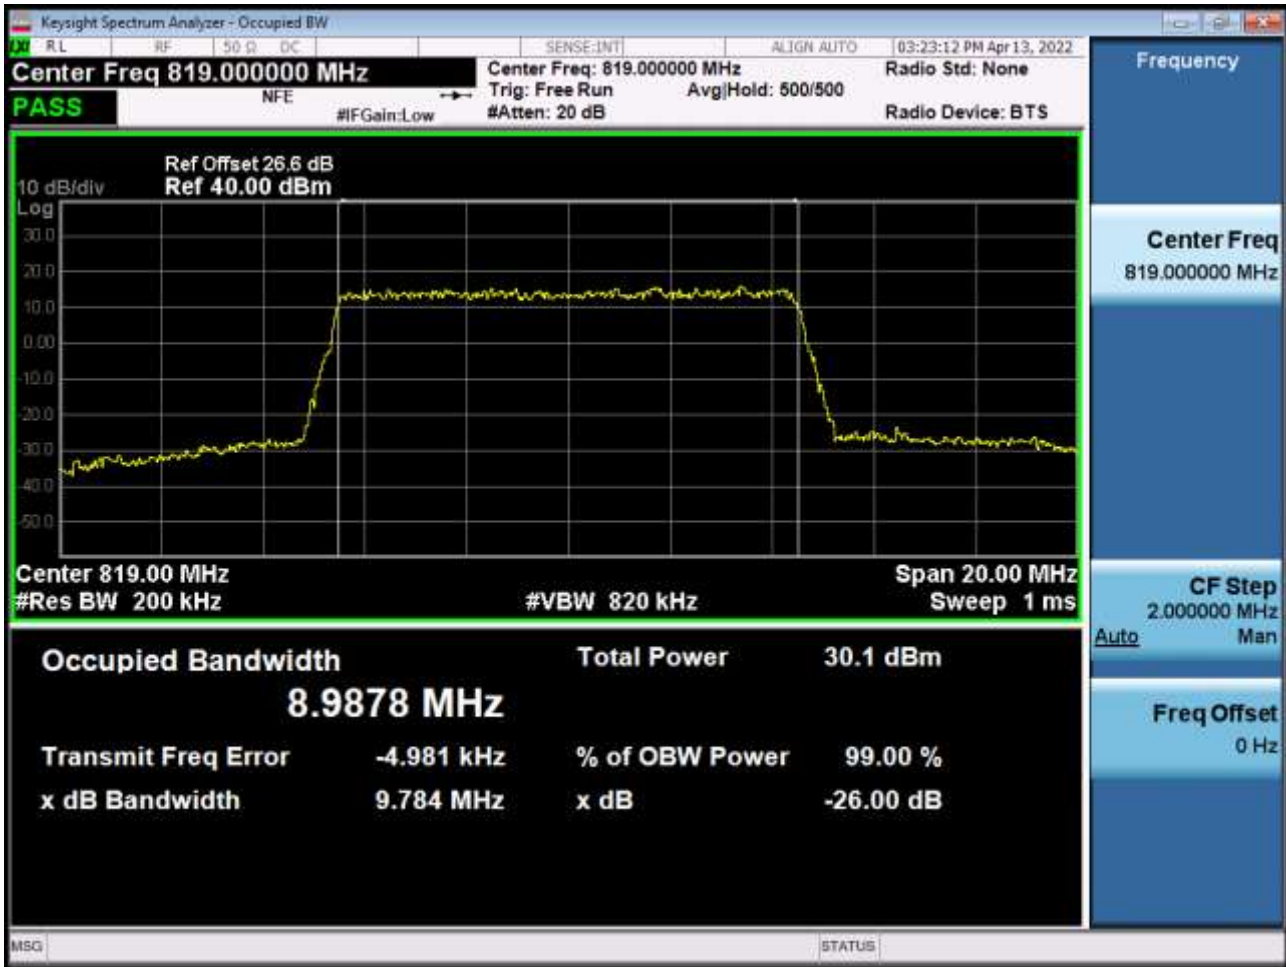

BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 64QAM RB 50\_0)




BAND 26. Occupied Bandwidth Plot (10 M BW Ch.26740 256QAM RB 50\_0)

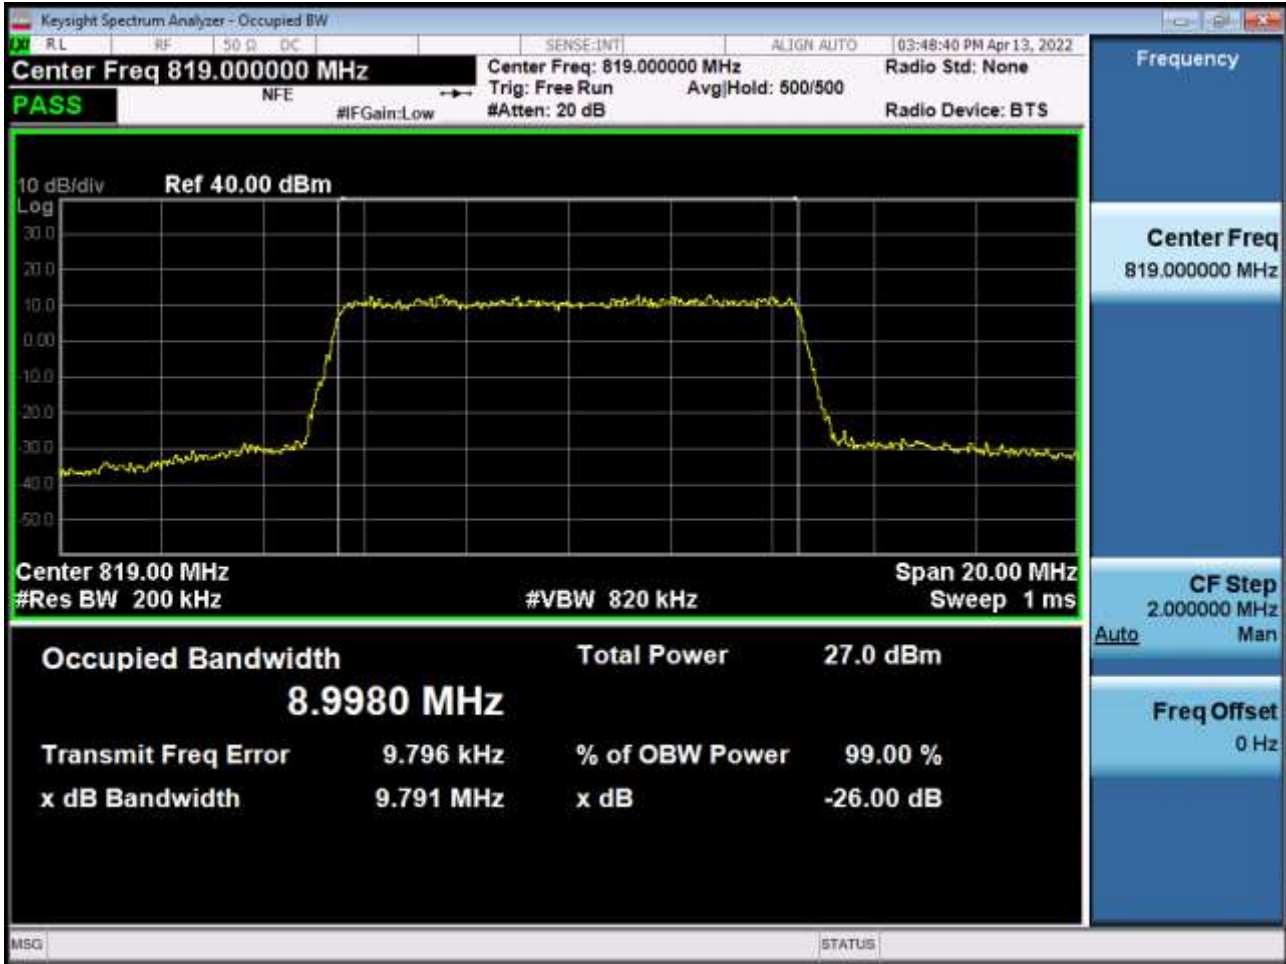

BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 QPSK RB 75\_0)



BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 16QAM RB 75\_0)

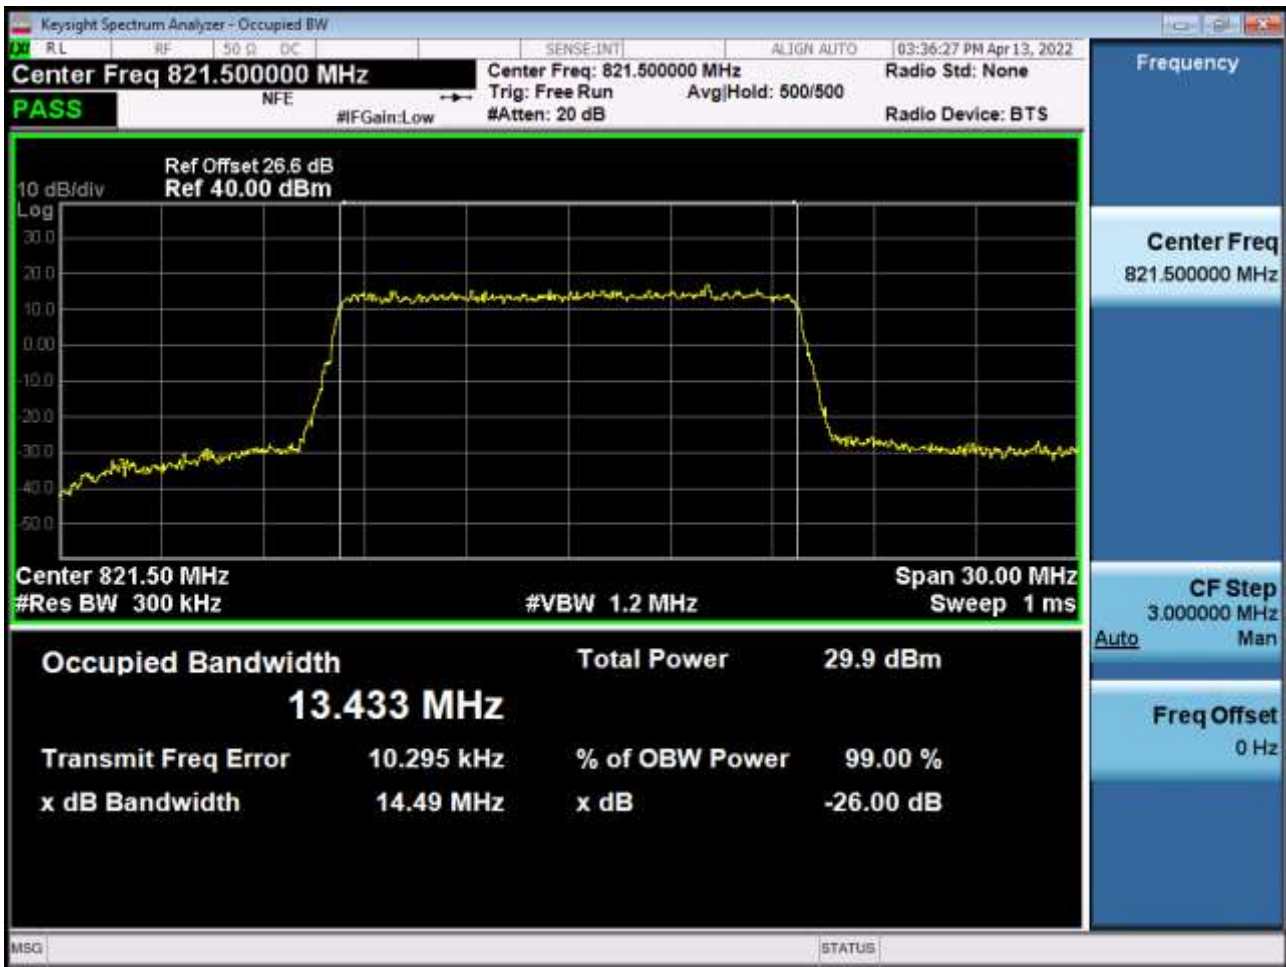



BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 64QAM RB 75\_0)




BAND 26. Occupied Bandwidth Plot (15 M BW Ch.26765 256QAM RB 75\_0)






BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK RB 1, Offset 0)

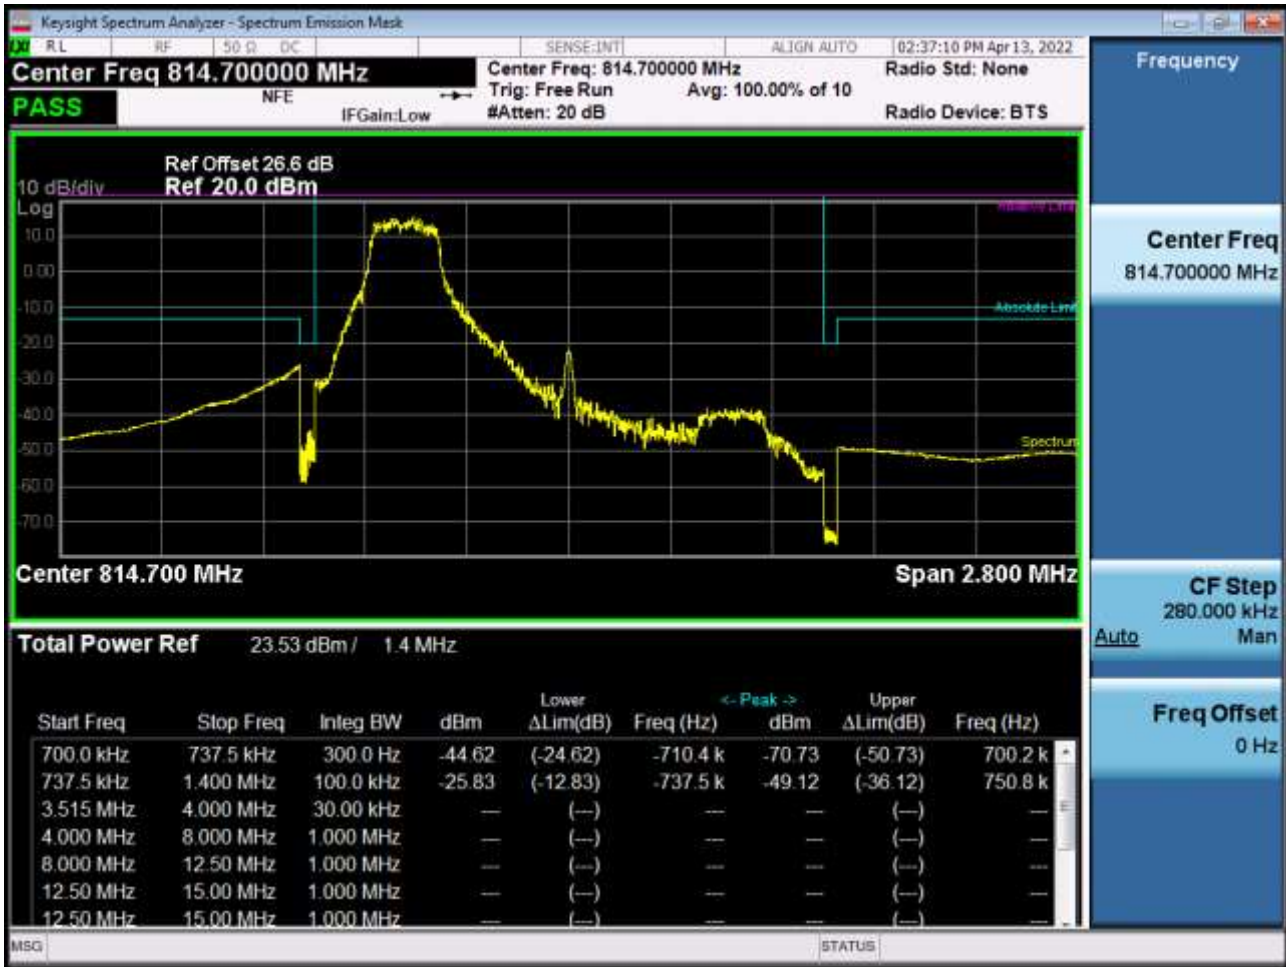

BAND 26. Lower Channel Edge Plot (1.4 M BW Ch.26697 QPSK\_RB6\_Offset 0)




BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK RB 1, Offset 0)

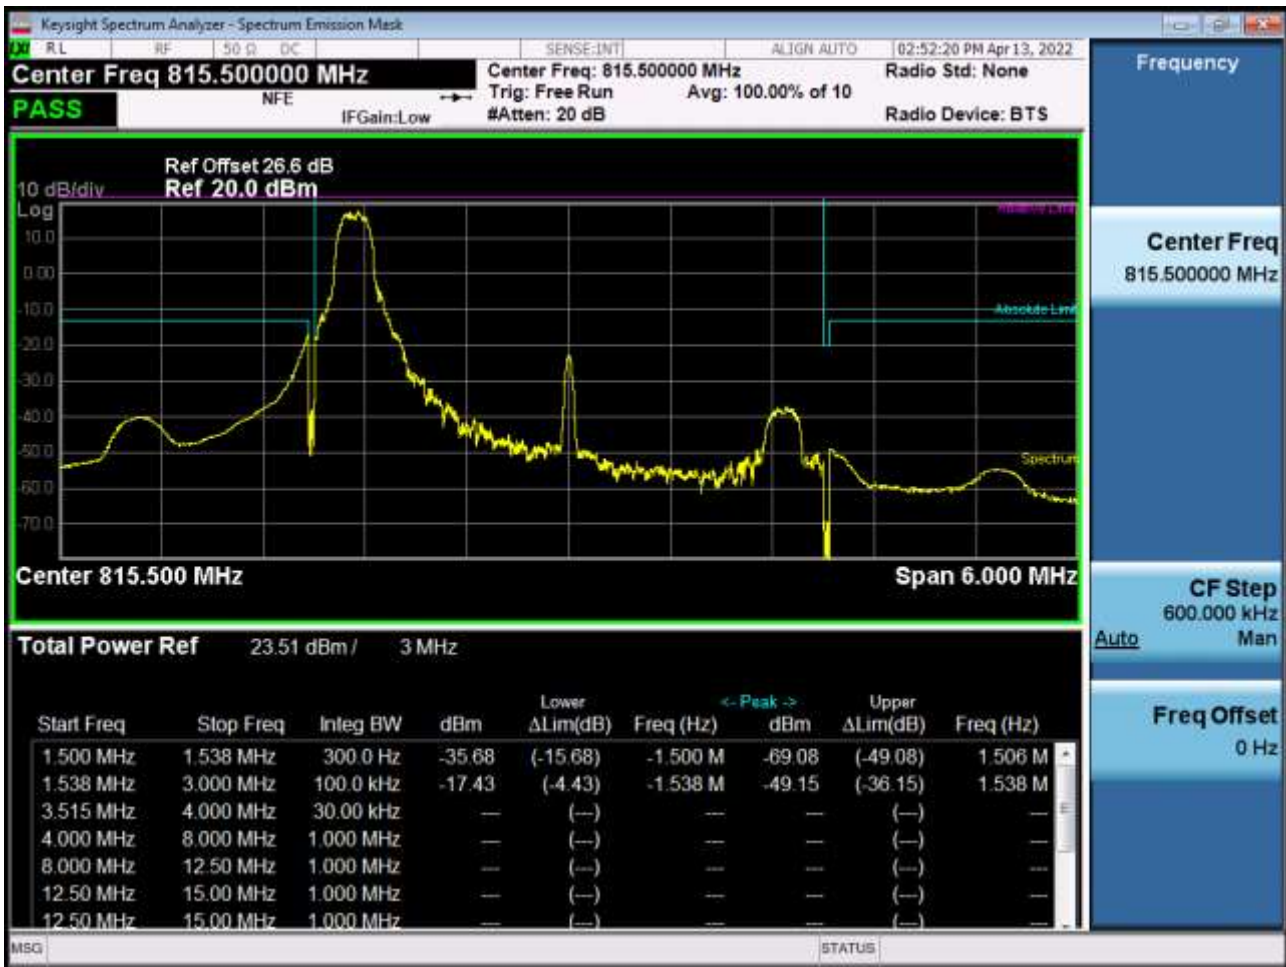

BAND 26. Lower Channel Edge Plot (3 M BW Ch.26705 QPSK\_RB15\_Offset 0)




BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK RB 1, Offset 0)

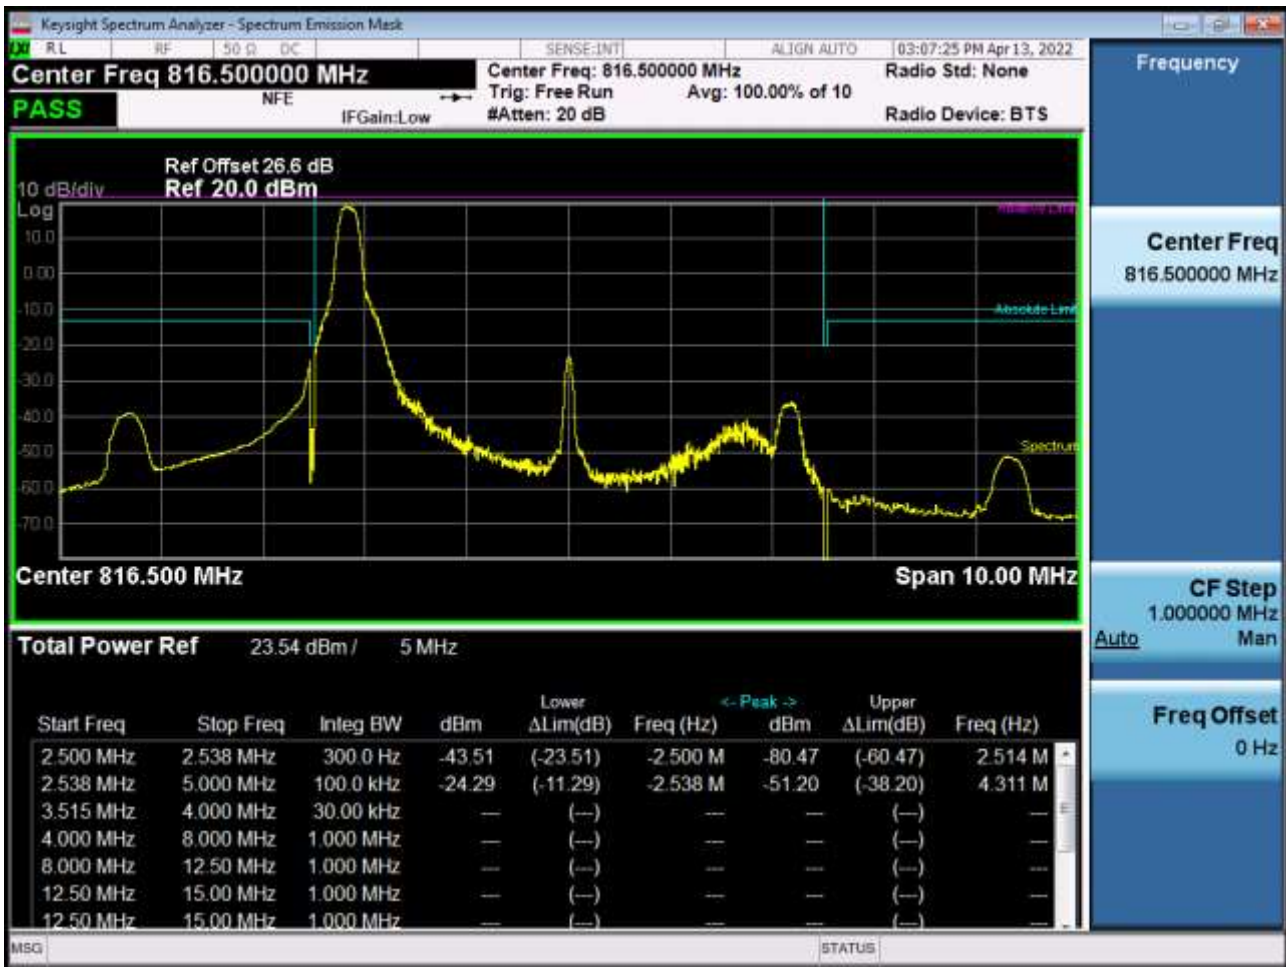





BAND 26. Lower Channel Edge Plot (5 M BW Ch.26715 QPSK\_RB25\_Offset 0)

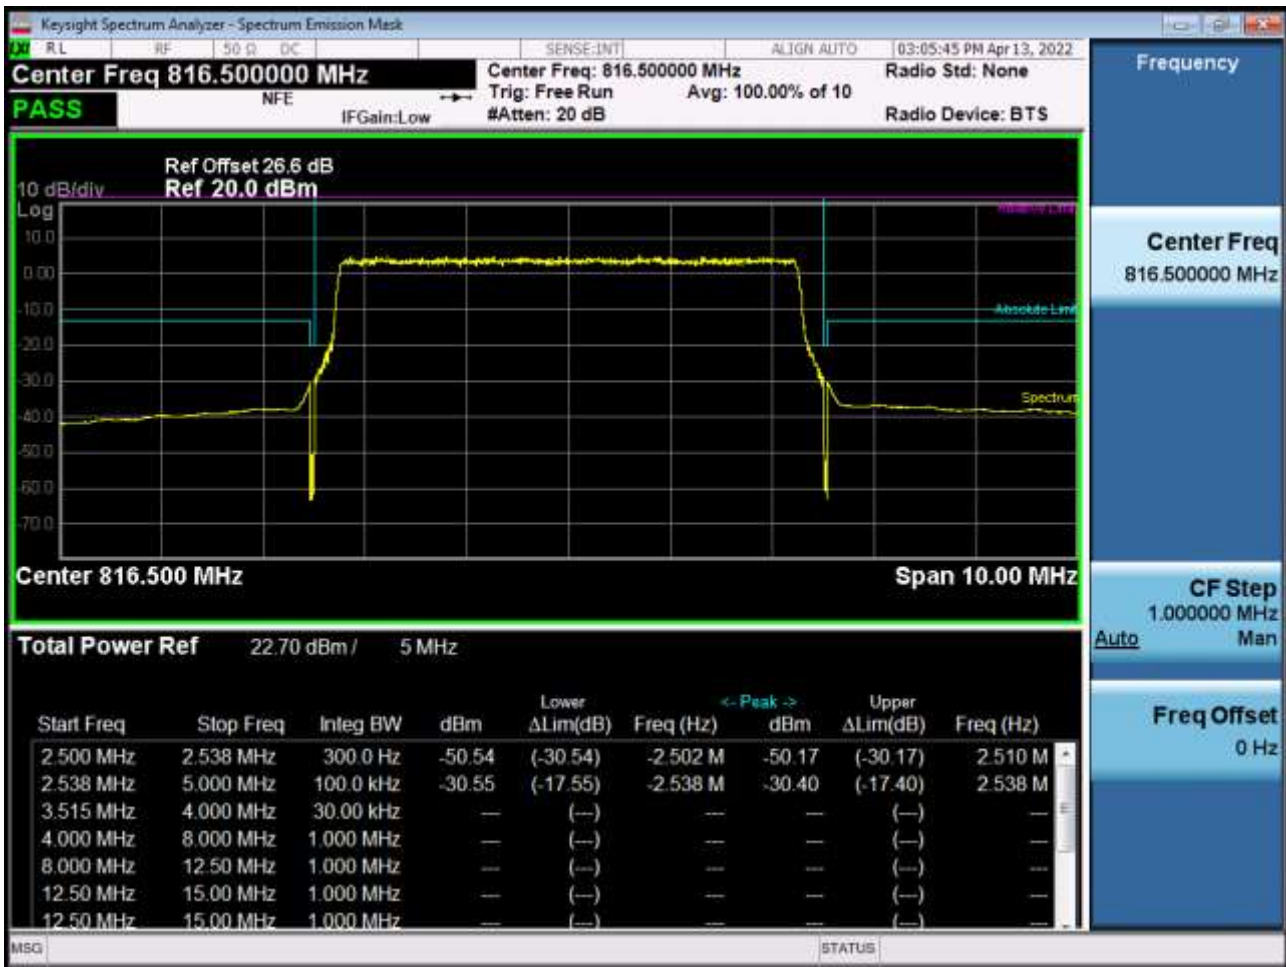

BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK RB 1, Offset 0)

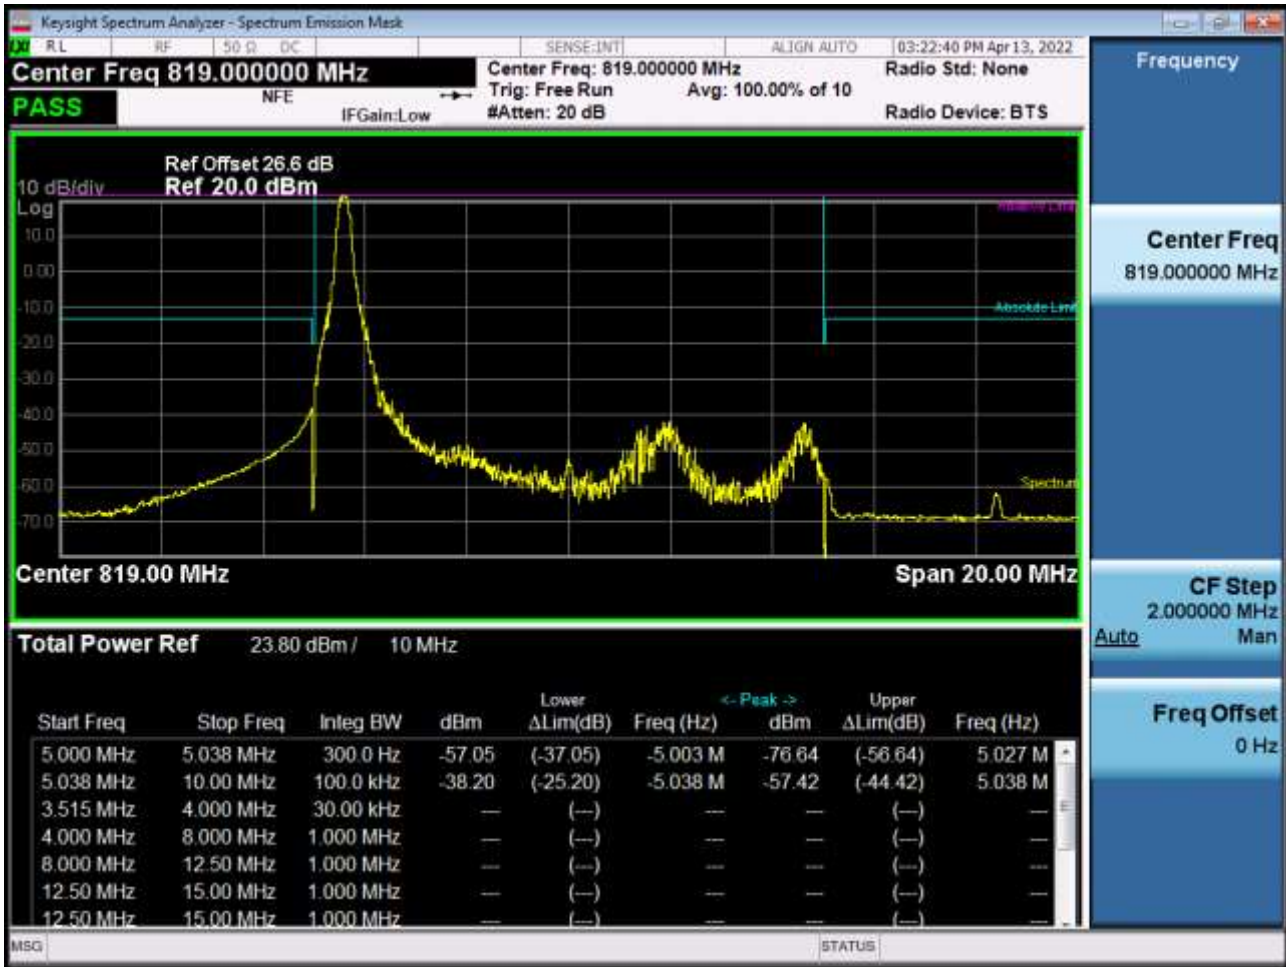


BAND 26. Low Channel Edge Plot (10 M BW Ch.26740 QPSK\_RB50\_Offset 0)

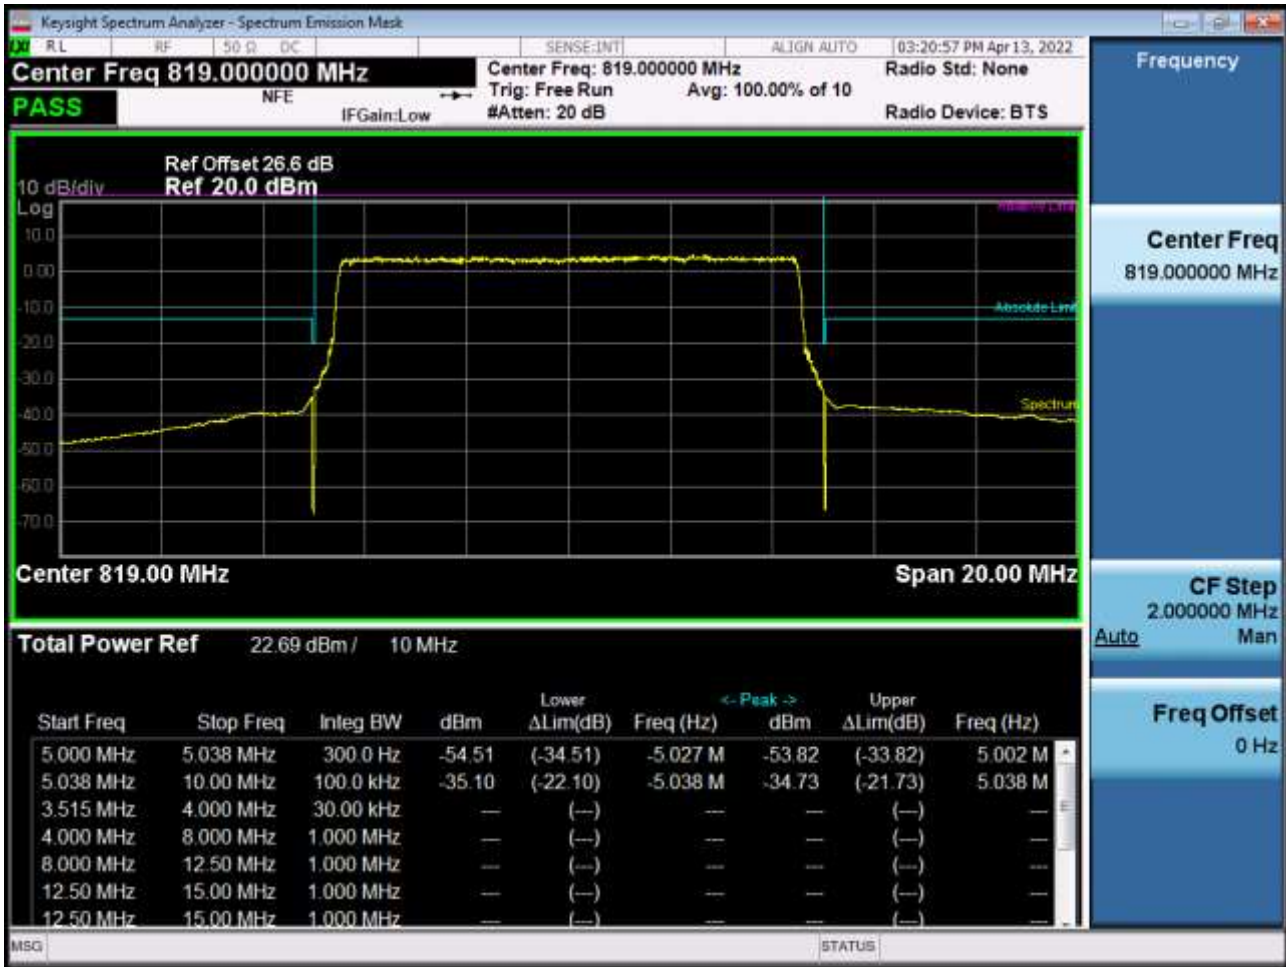




BAND 26. Mid Channel Edge Plot (10 M BW Ch. 26740 QPSK\_RB1\_Offset 49)

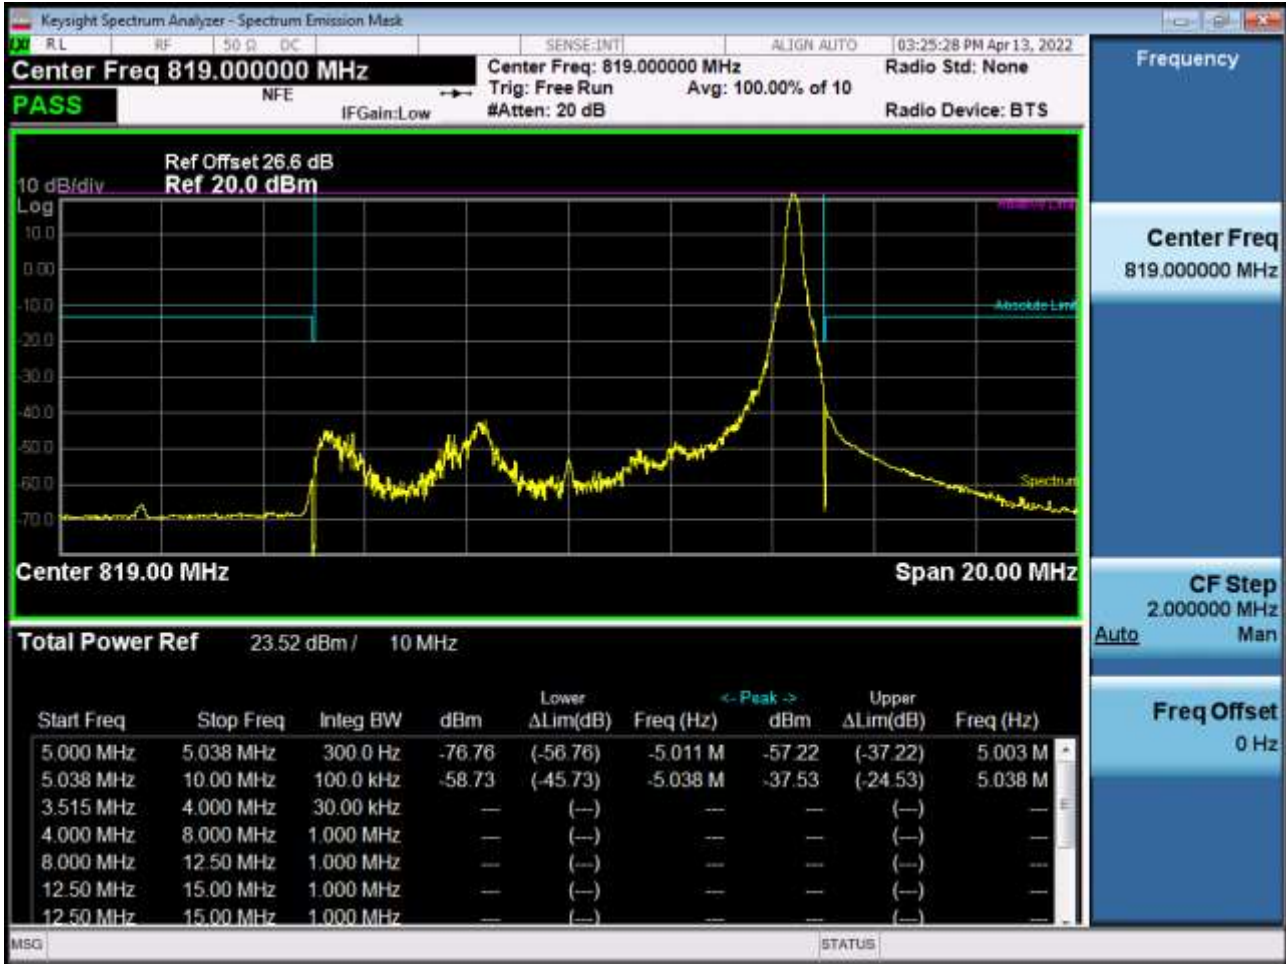


BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset 0)

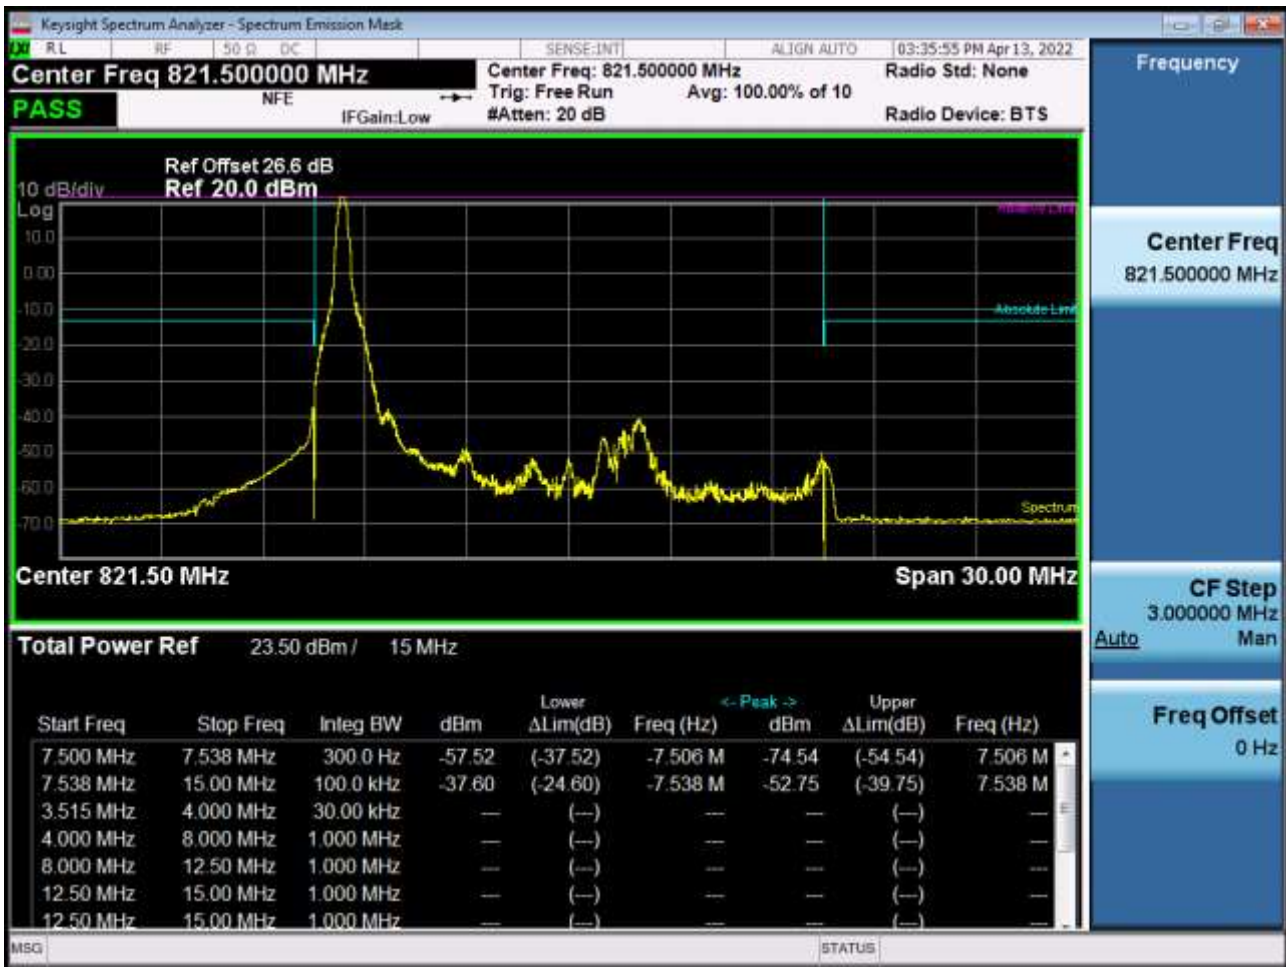

BAND 26. Low Channel Edge Plot (15 M BW Ch.26765 QPSK RB 75, Offset0)



BAND 26. Mid Channel Edge Plot (15 M BW Ch.26765 QPSK\_RB1\_Offset 74)

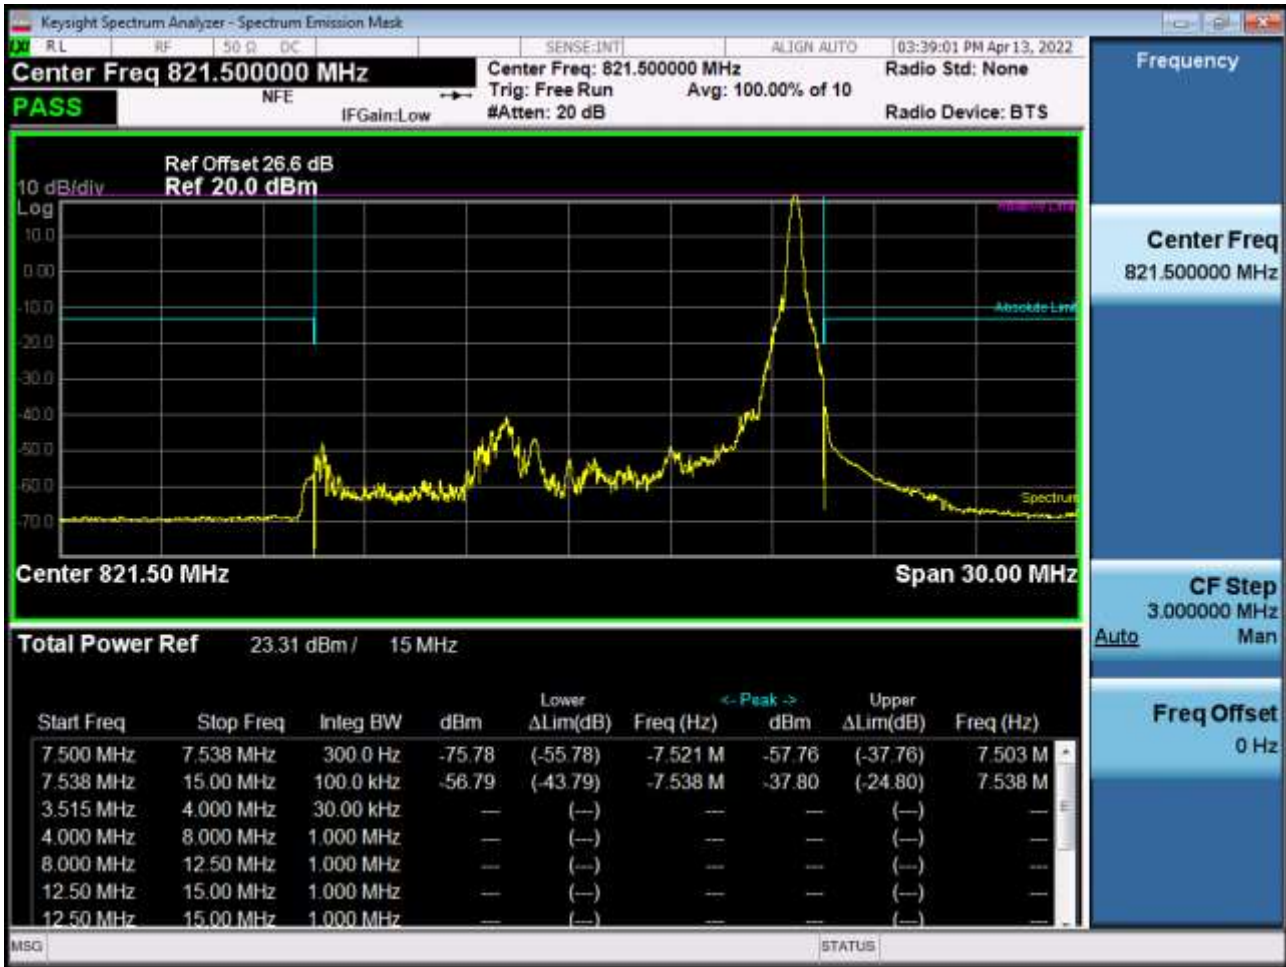

BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK RB 1, Offset74)






BAND 26. Mid Band Edge Plot (15 M BW Ch.26765 QPSK\_RB75\_Offset 0)



BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB1\_Offset 5)

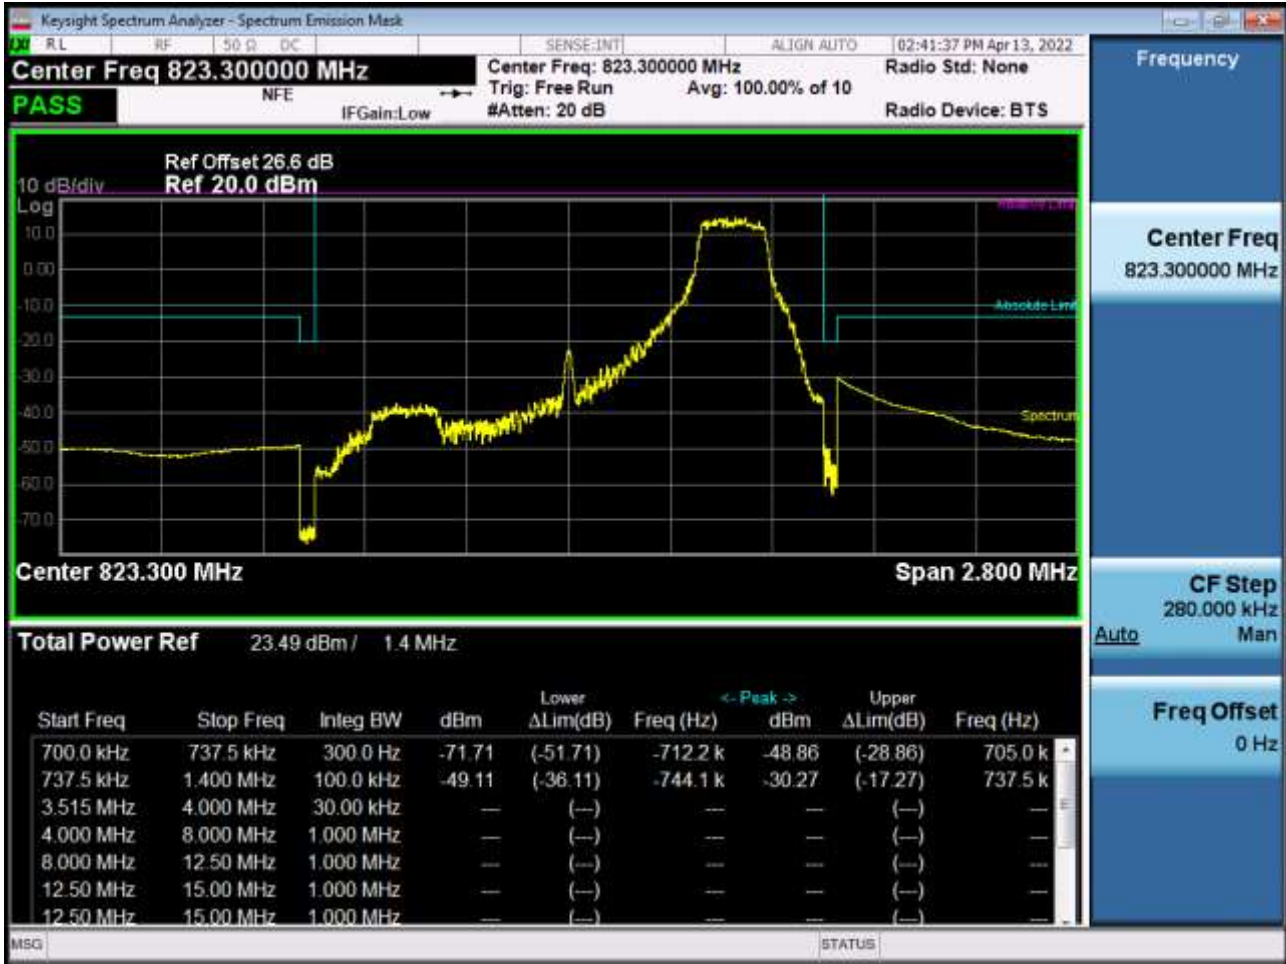


BAND 26. Upper Channel Edge Plot (1.4 M BW Ch.26783 QPSK\_RB6\_Offset 0)







BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB1\_Offset 14)

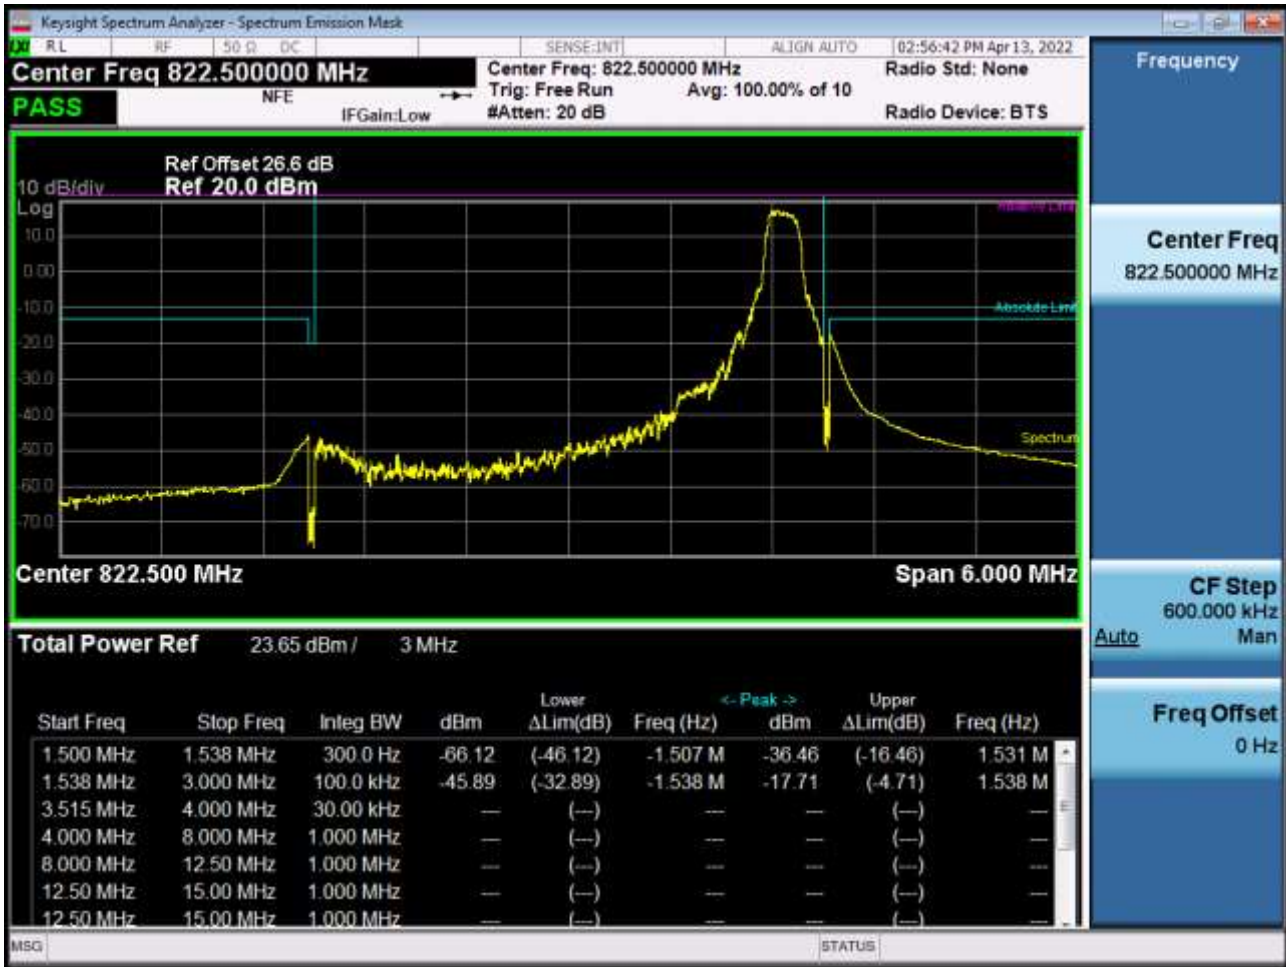


BAND 26. Upper Channel Edge Plot (3 M BW Ch.26775 QPSK\_RB15\_Offset 0)

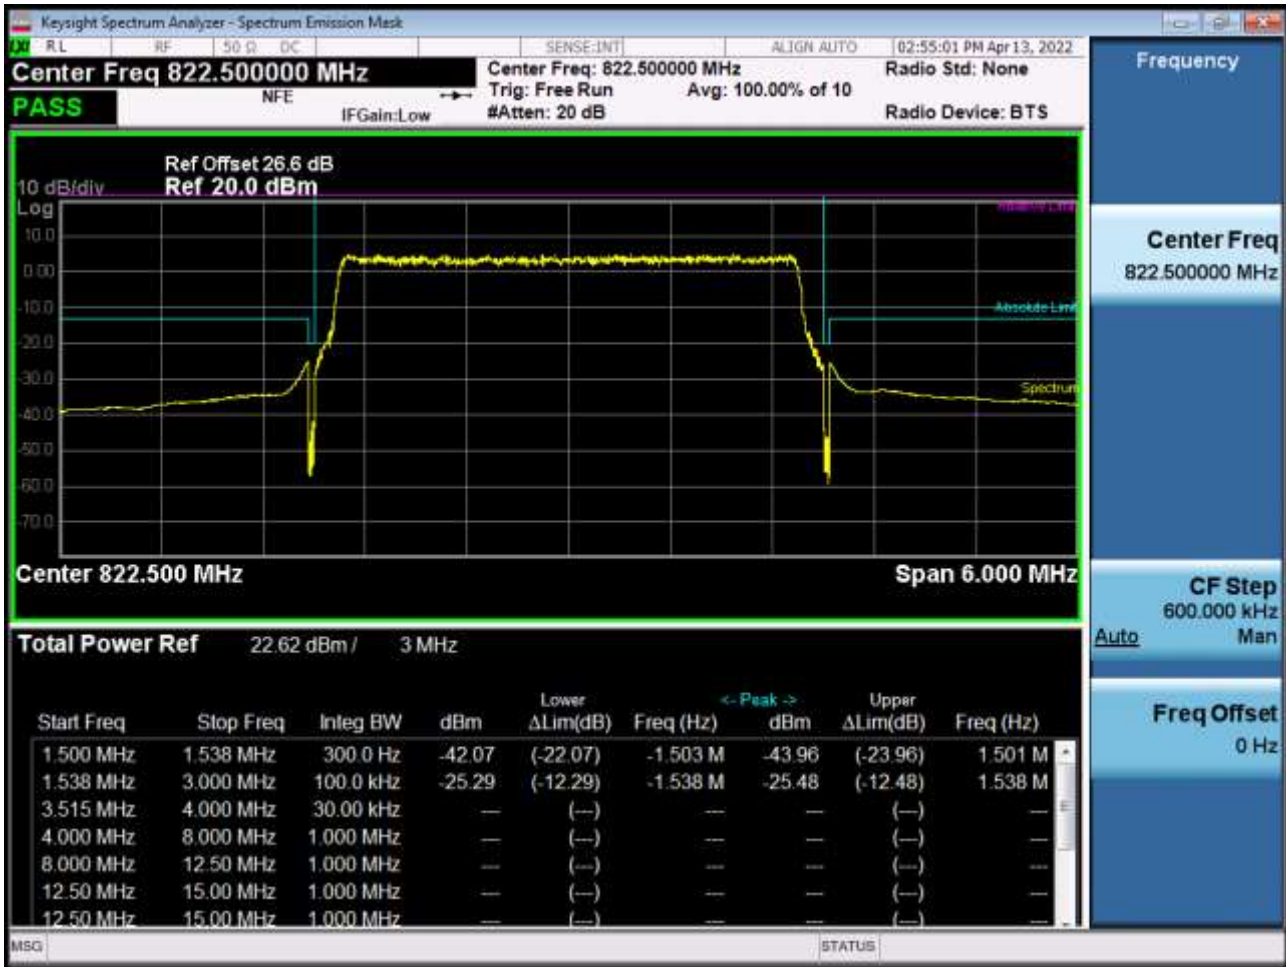


BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB1\_Offset 24)

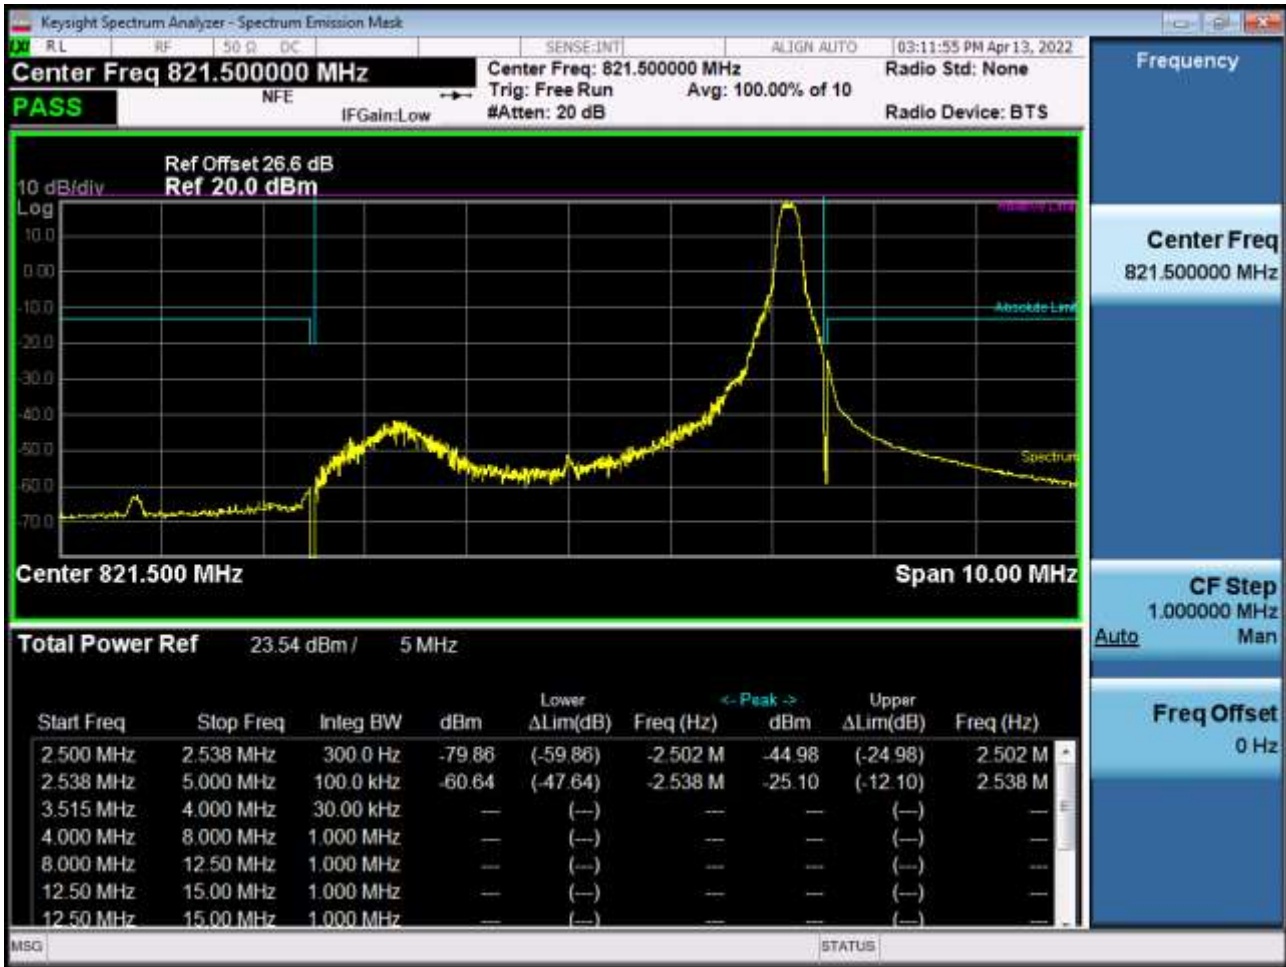

BAND 26. Upper Channel Edge Plot (5 M BW Ch.26765 QPSK\_RB25\_Offset 0)

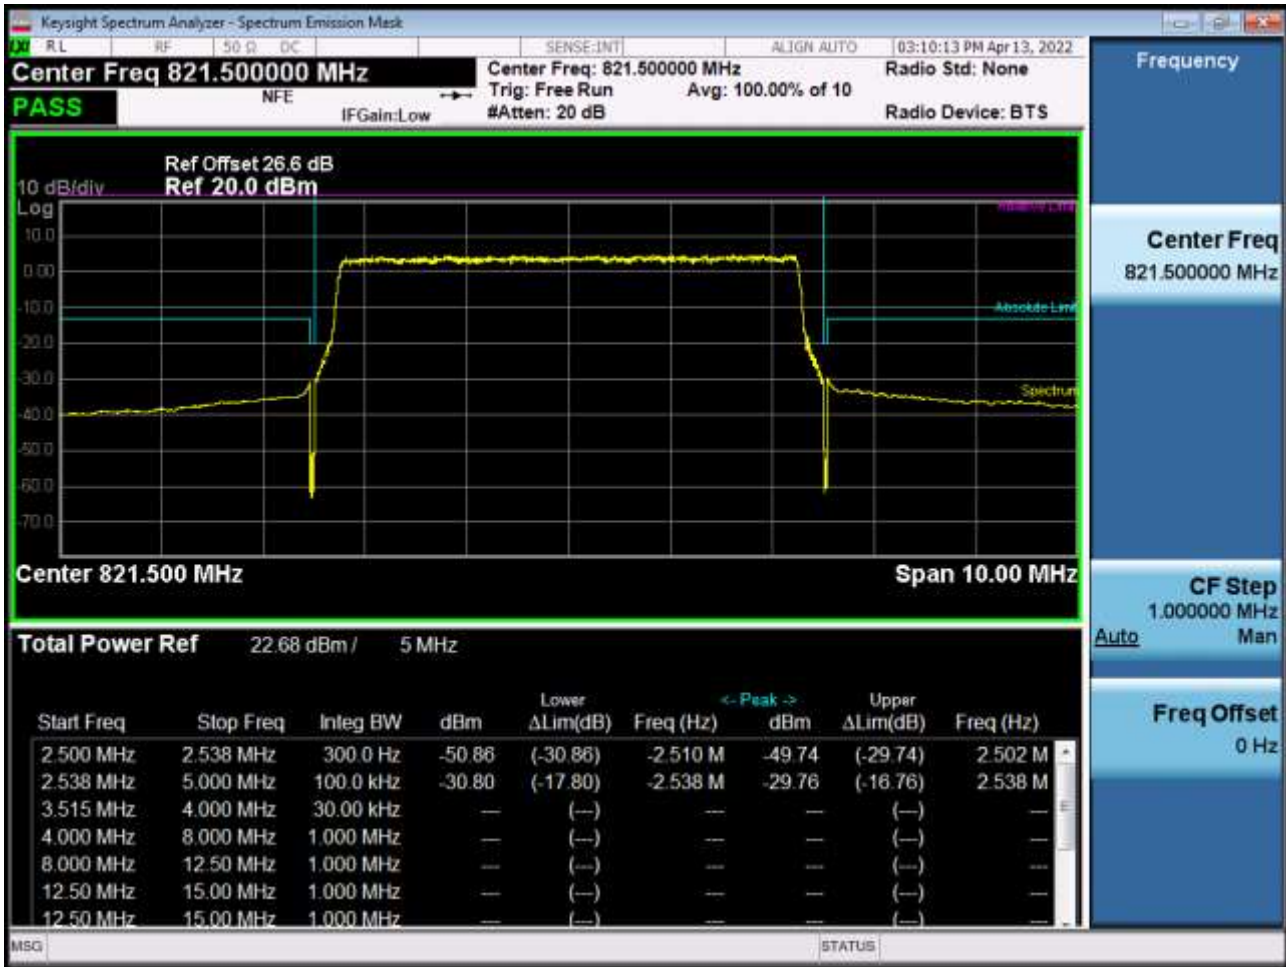


BAND 26. Conducted Spurious (26697 ch\_1.4 MHz\_QPSK\_RB 1\_0)

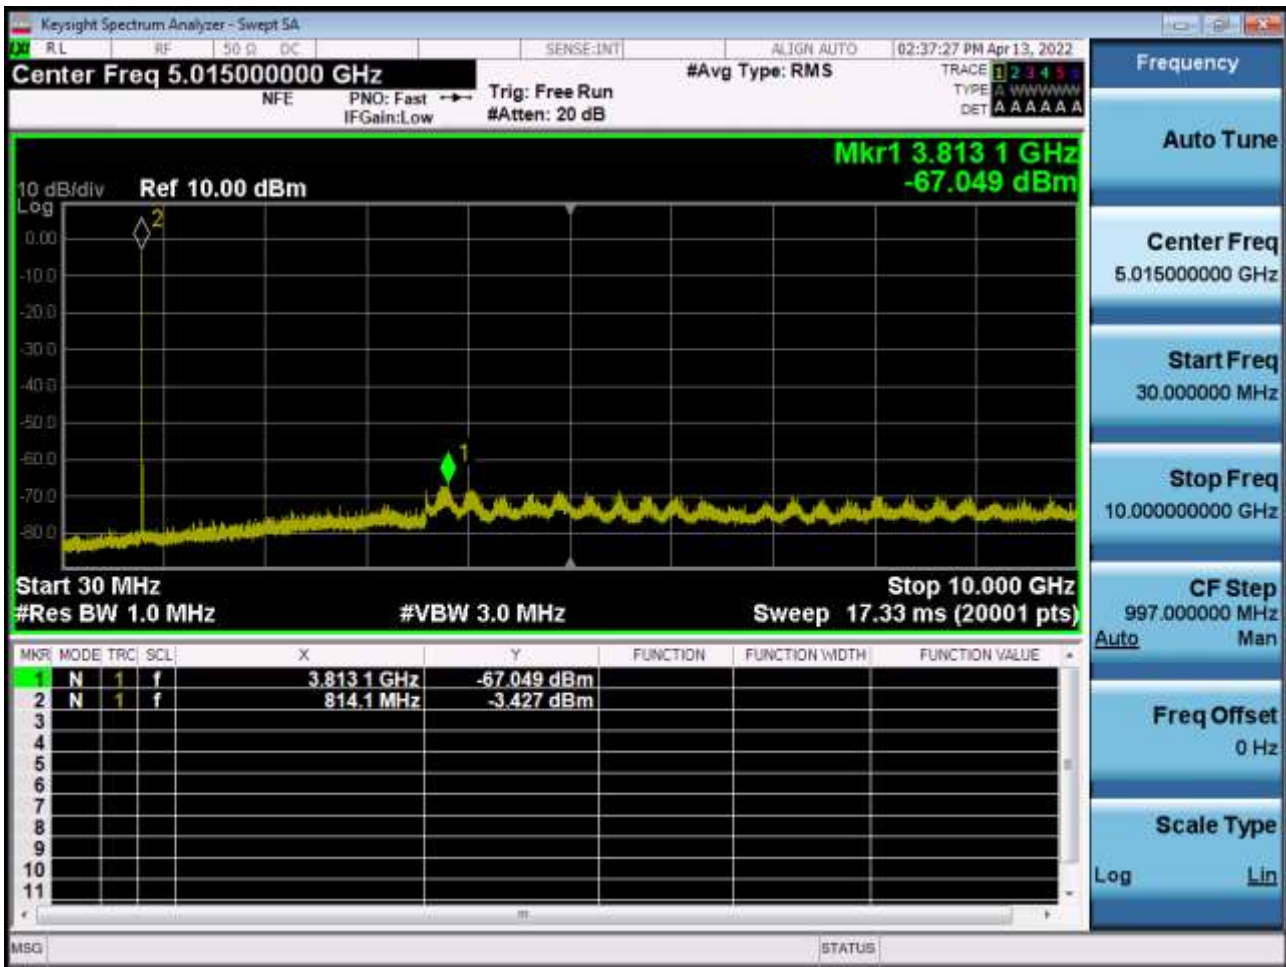





BAND 26. Conducted Spurious (26783 ch\_1.4 MHz\_QPSK\_RB 1\_0)

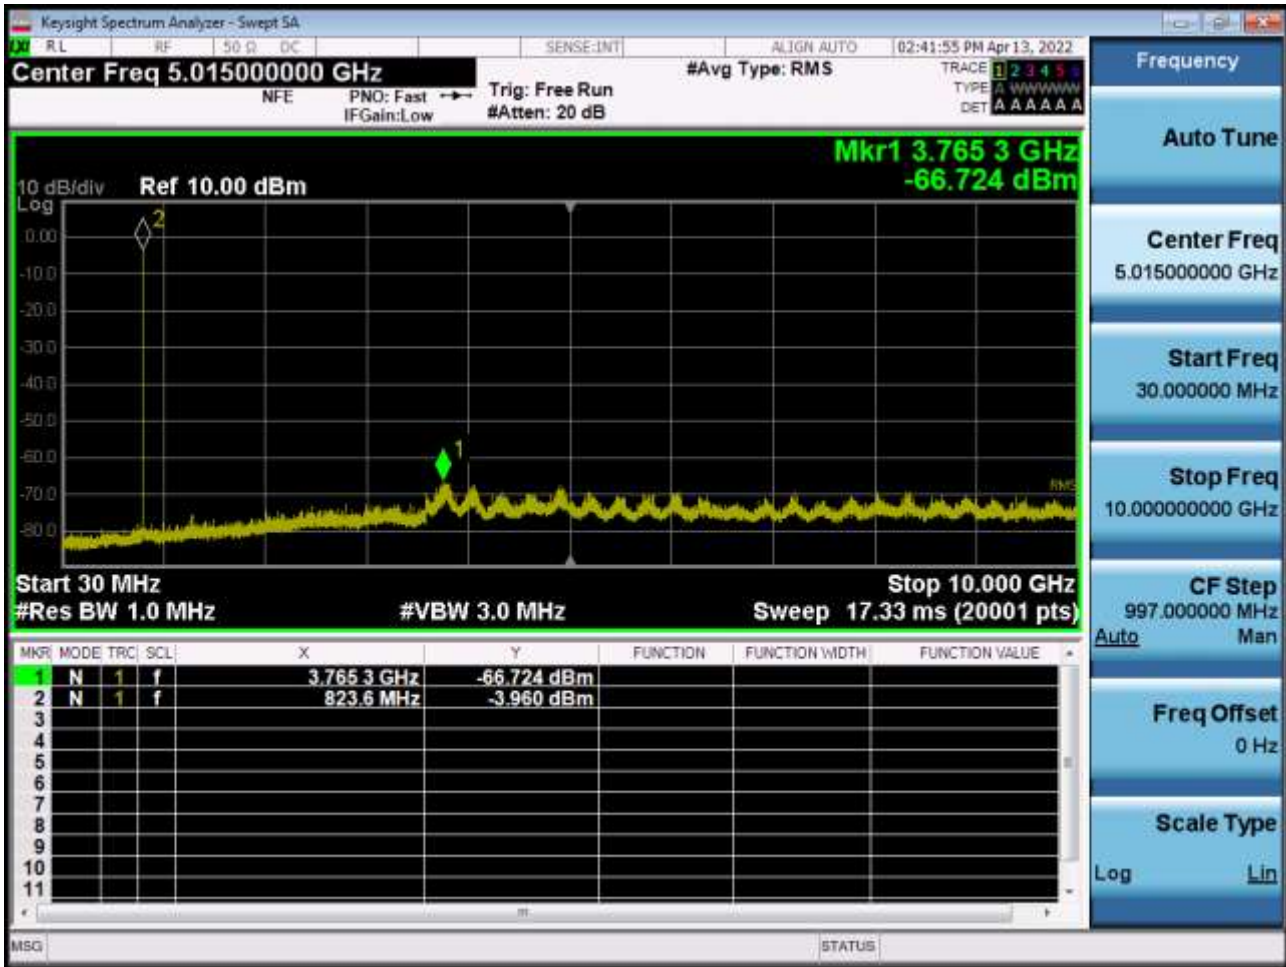

BAND 26. Conducted Spurious (26705 ch\_3 MHz\_QPSK\_RB 1\_0)

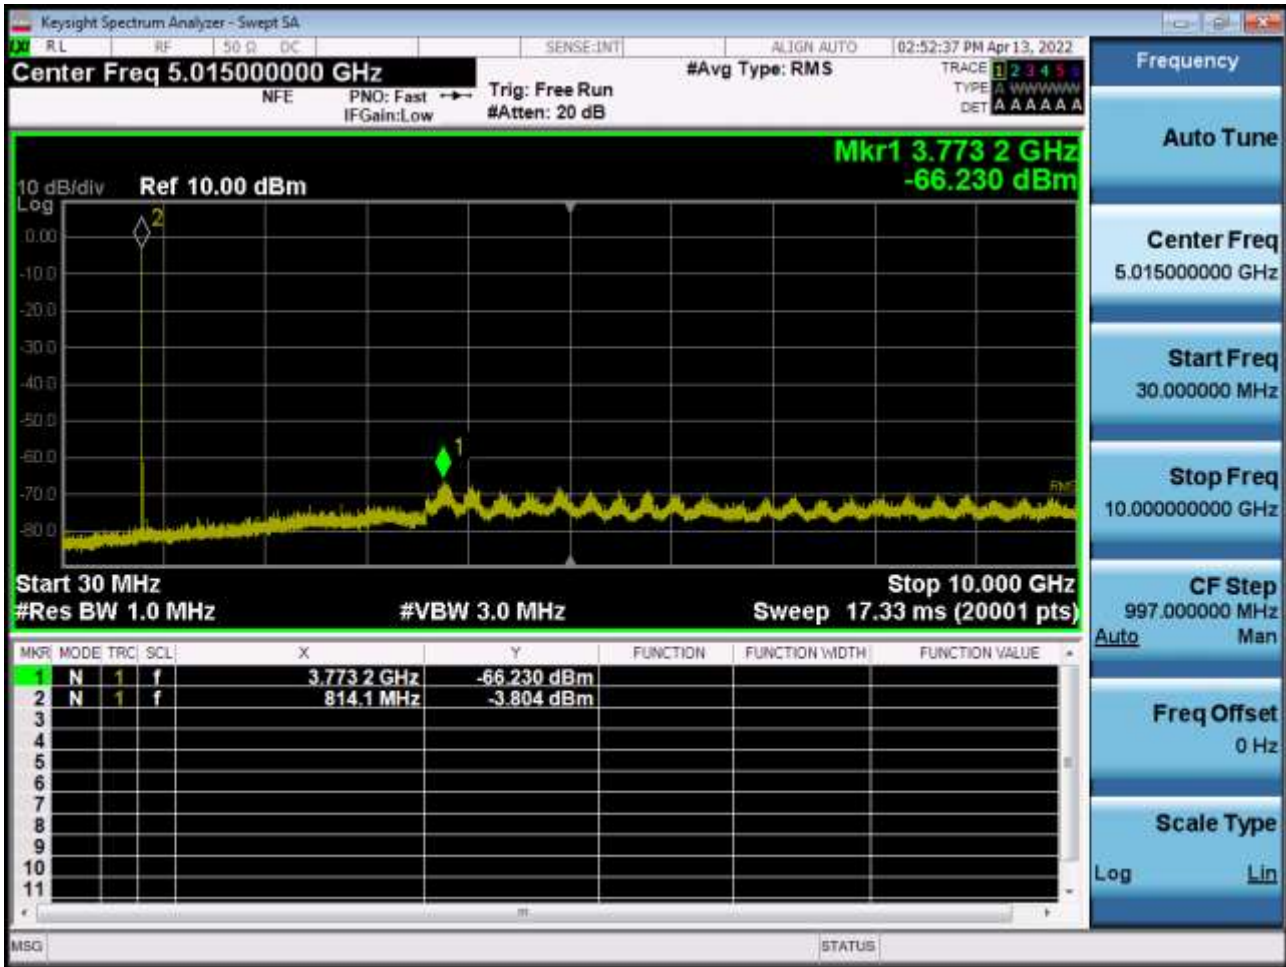


BAND 26. Conducted Spurious (26775 ch\_3 MHz\_QPSK\_RB 1\_0)

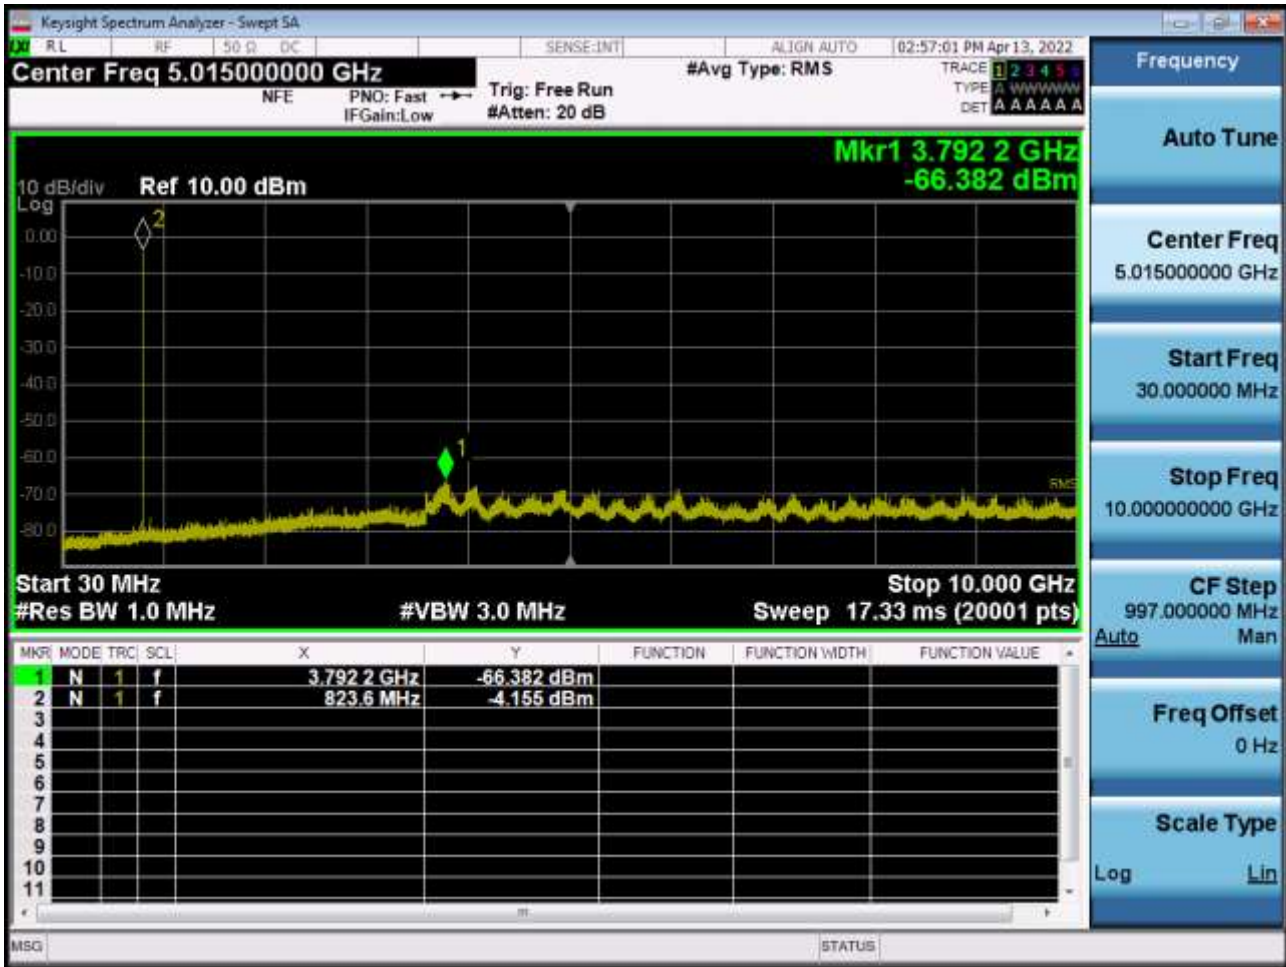





BAND 26. Conducted Spurious (26715 ch\_5 MHz\_QPSK\_RB 1\_0)

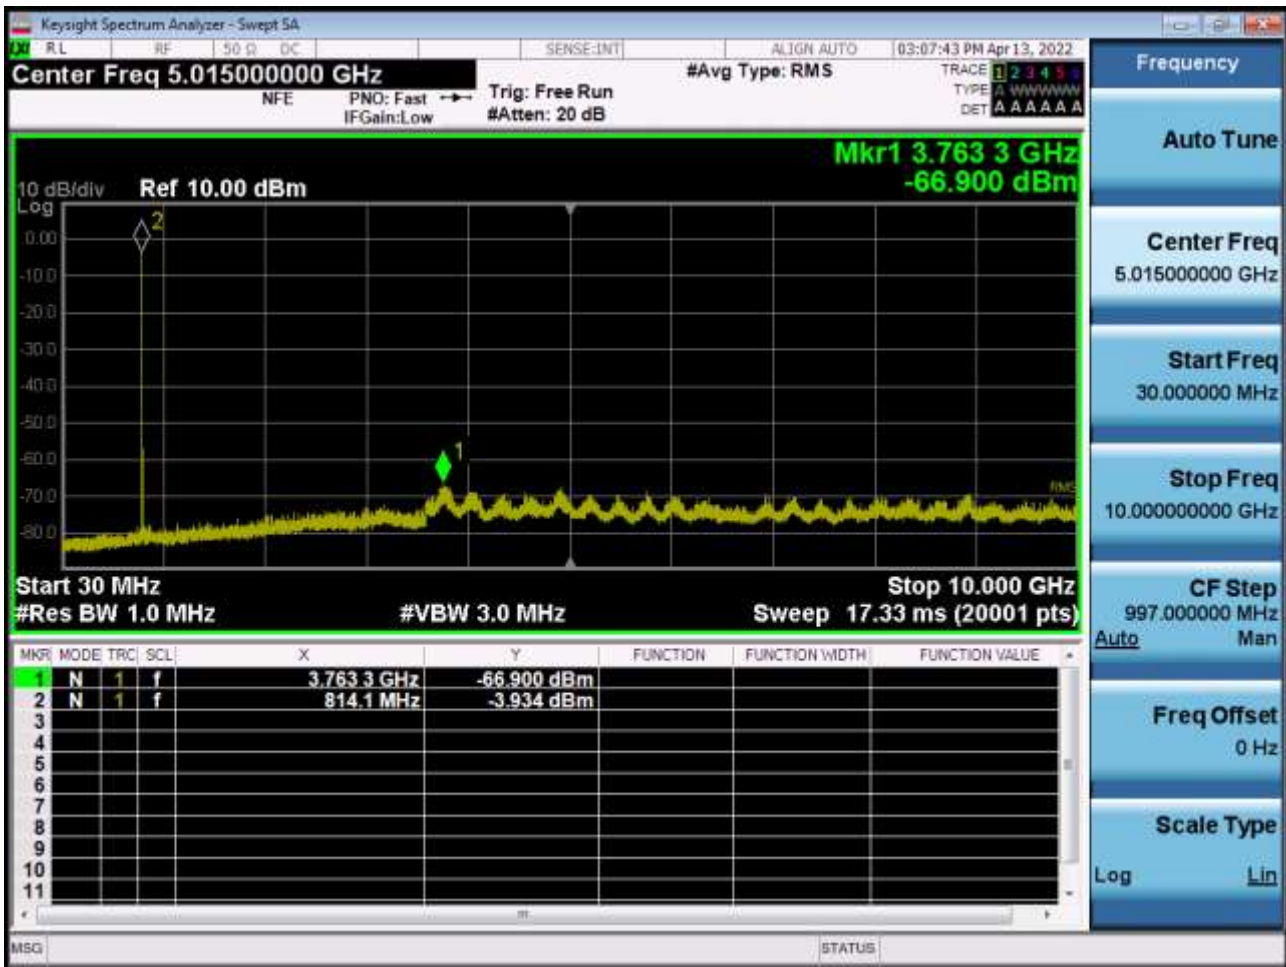


BAND 26. Conducted Spurious (26765 ch\_5 MHz\_QPSK\_RB 1\_0)

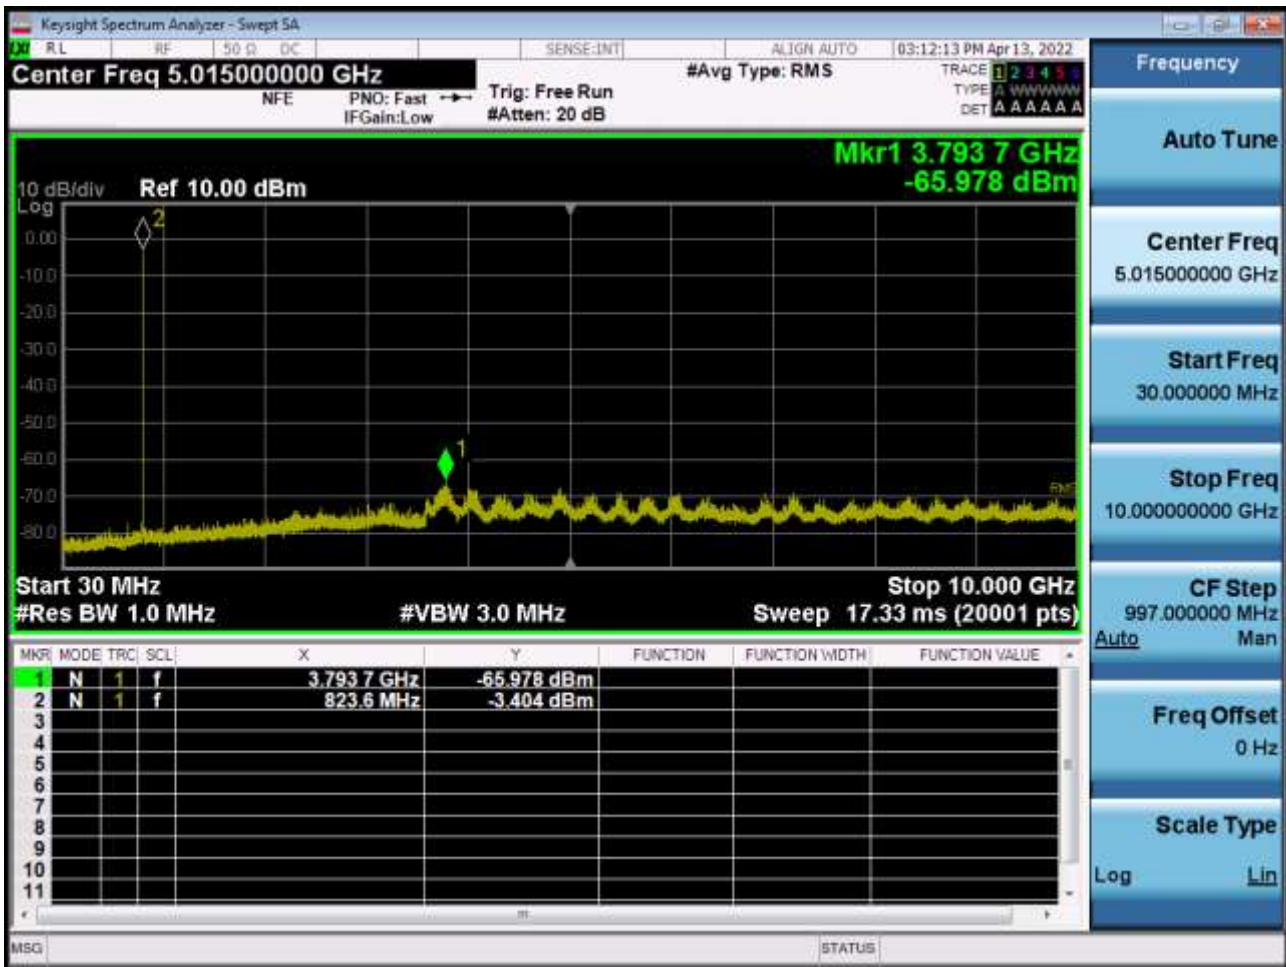

BAND 26. Conducted Spurious (26740 ch\_10 MHz\_QPSK\_RB 1\_0)

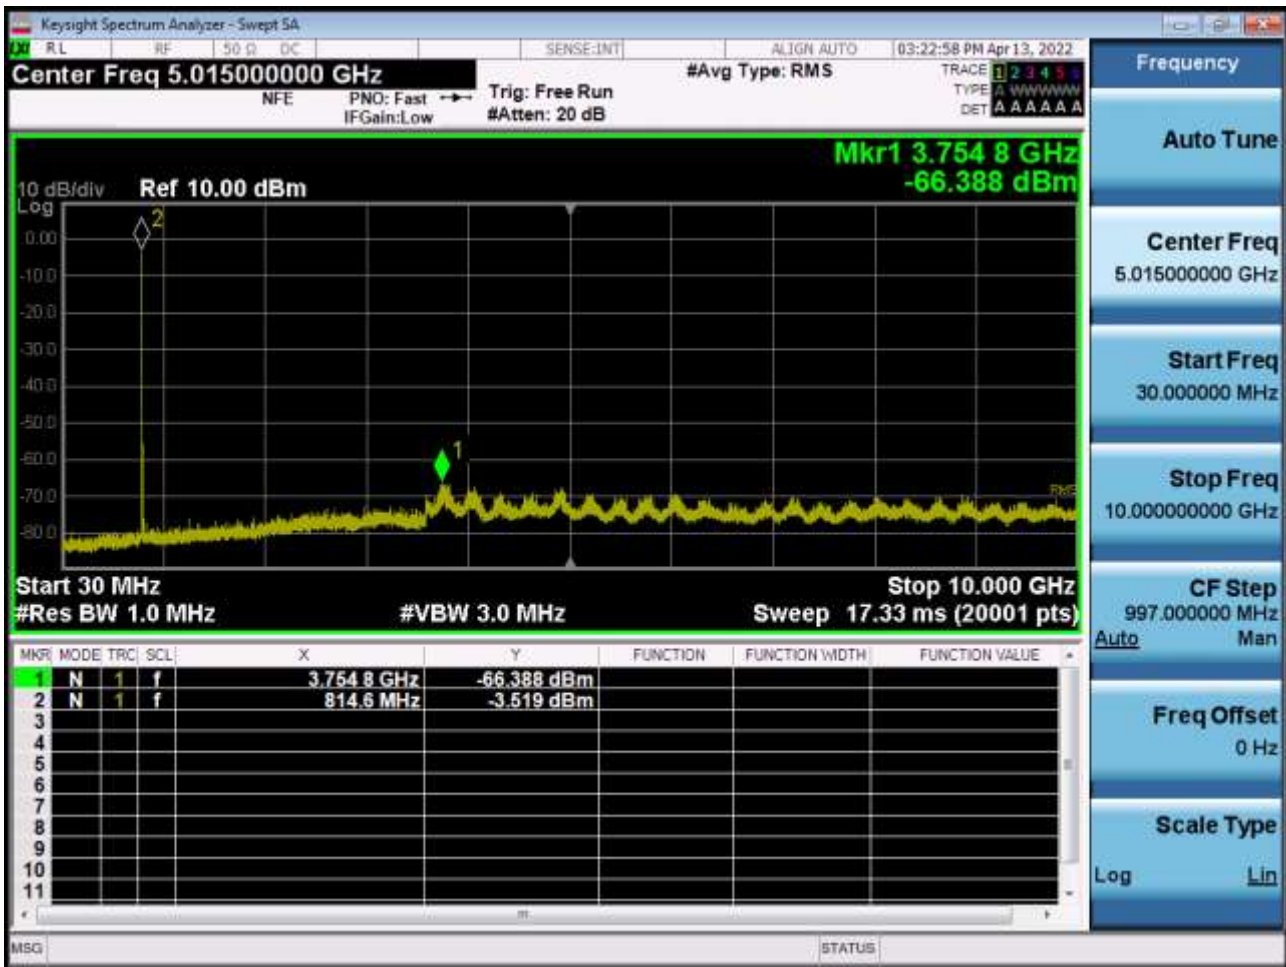


BAND 26. Conducted Spurious (26765 ch\_15 MHz\_QPSK\_RB 1\_0)

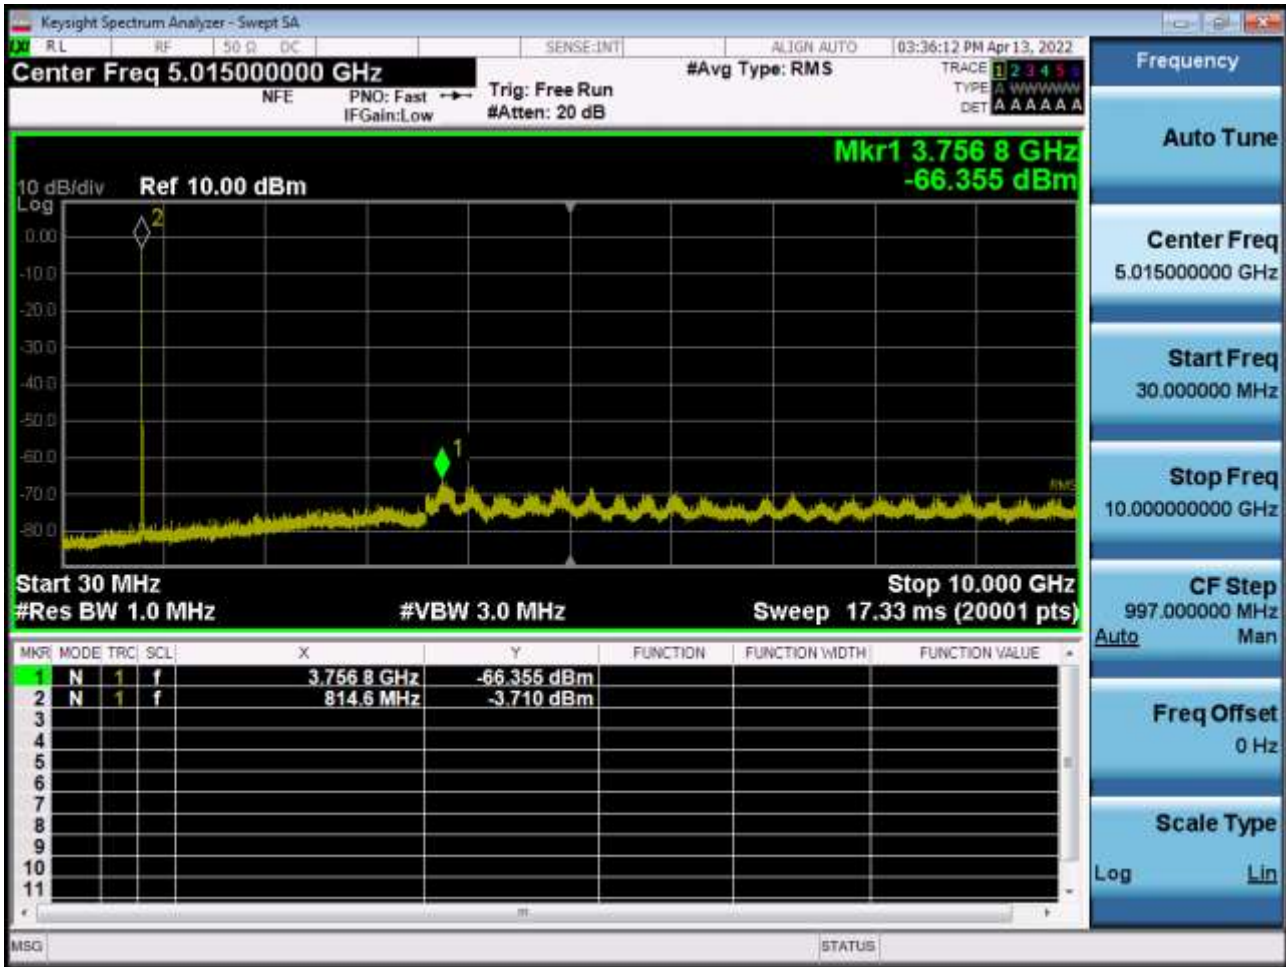


## 10. TEST PLOTS (STRADDLE CHANNEL)

BAND 26. Conducted Spurious (1.4 MHz\_QPSK\_RB 1\_0)

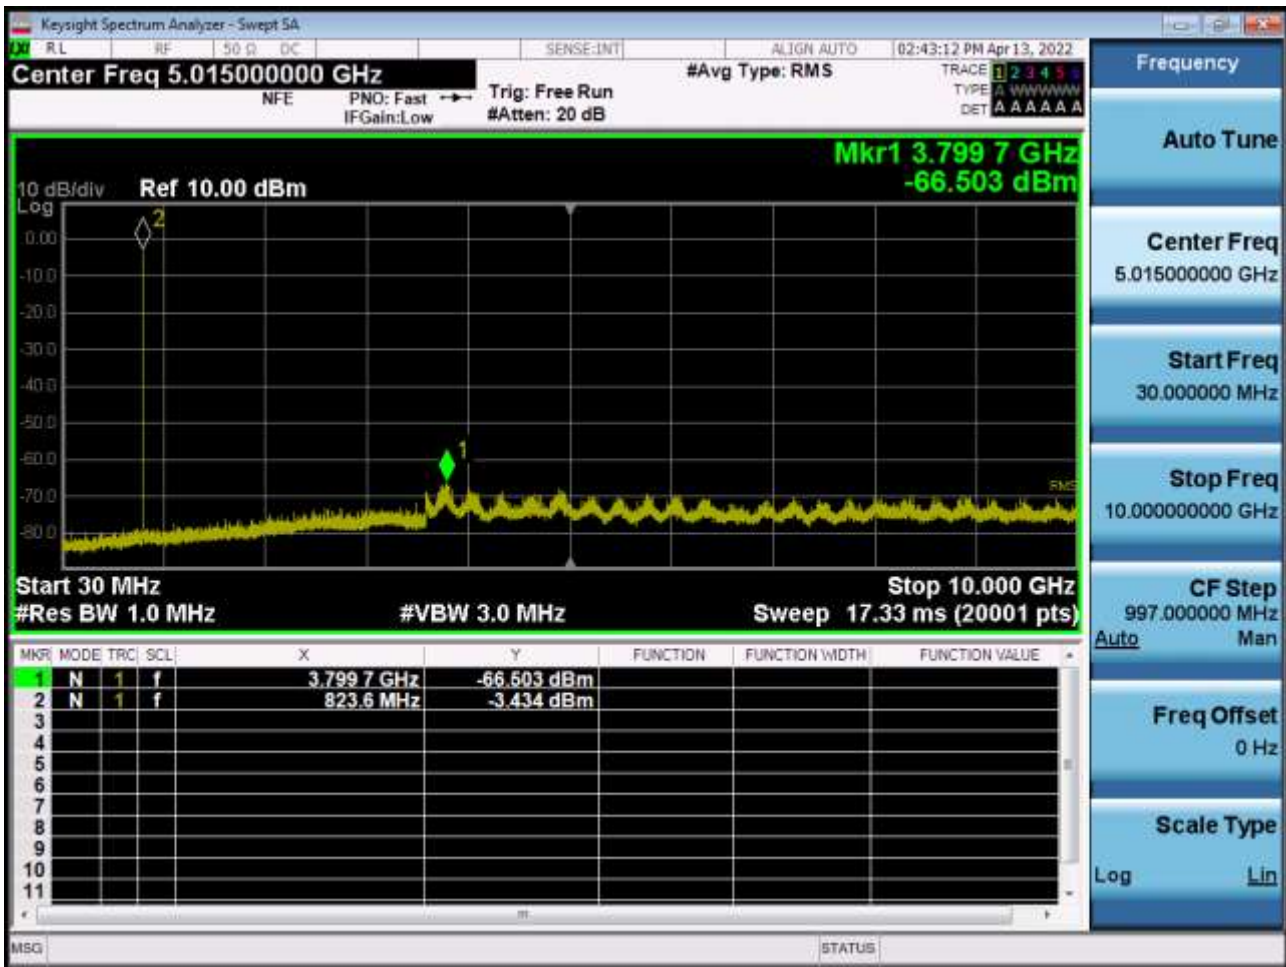




BAND 26. Conducted Spurious (3 MHz\_QPSK\_RB 1\_0)

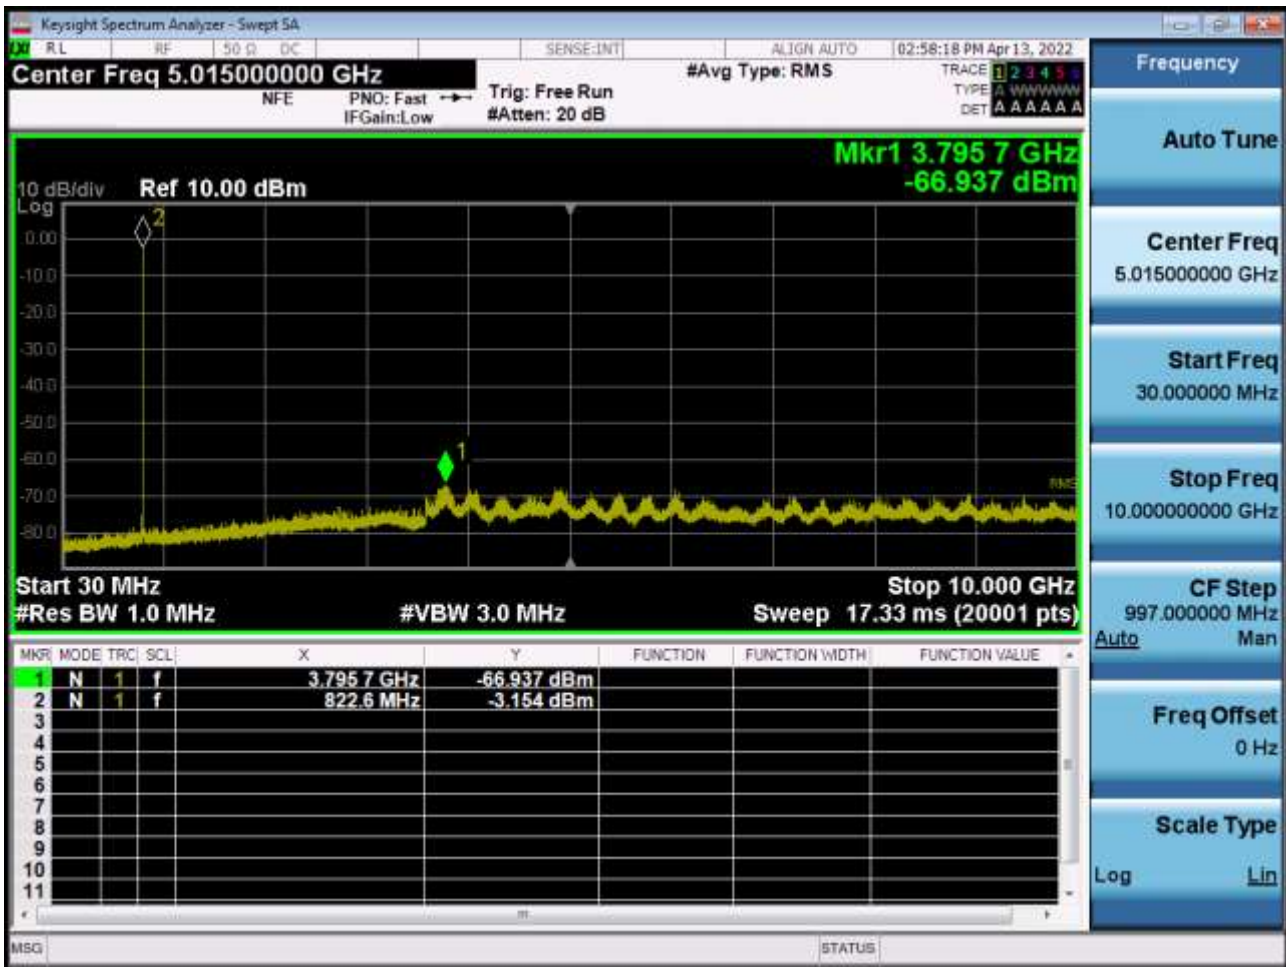


BAND 26. Conducted Spurious (5 MHz\_QPSK\_RB 1\_0)

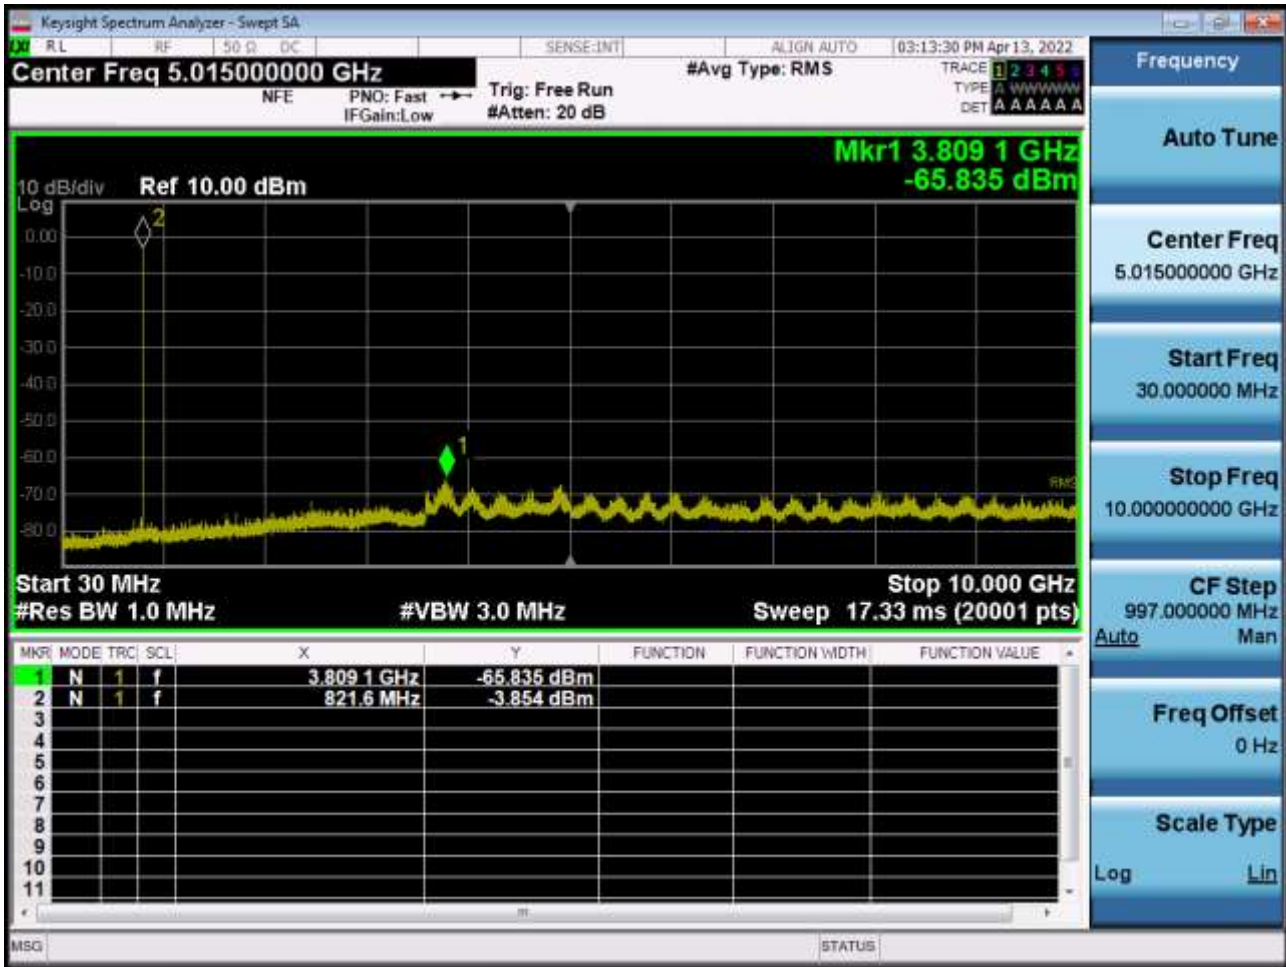





BAND 26. Conducted Spurious (10 MHz\_QPSK\_RB 1\_0)

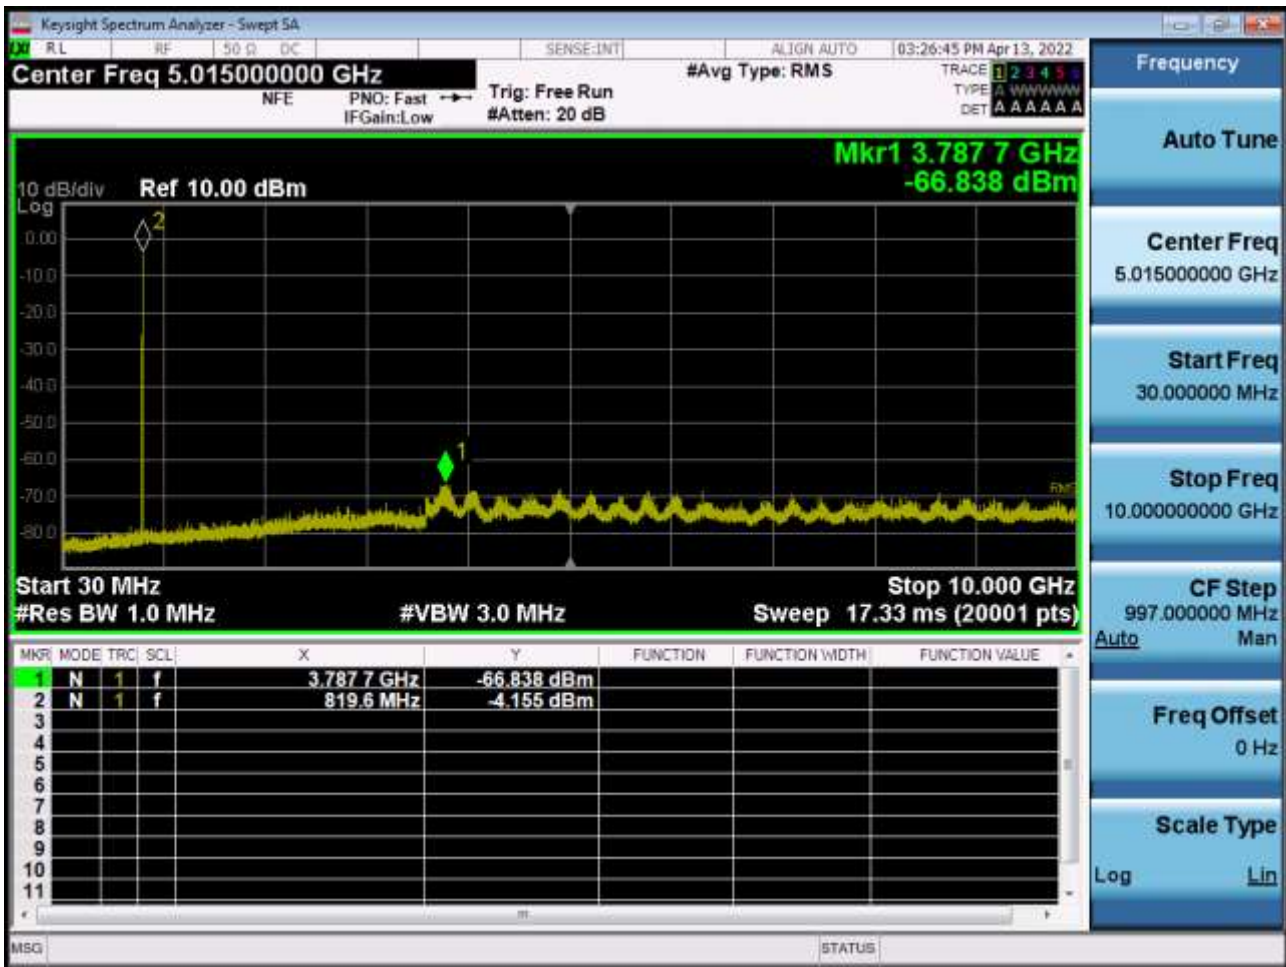


BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_0)

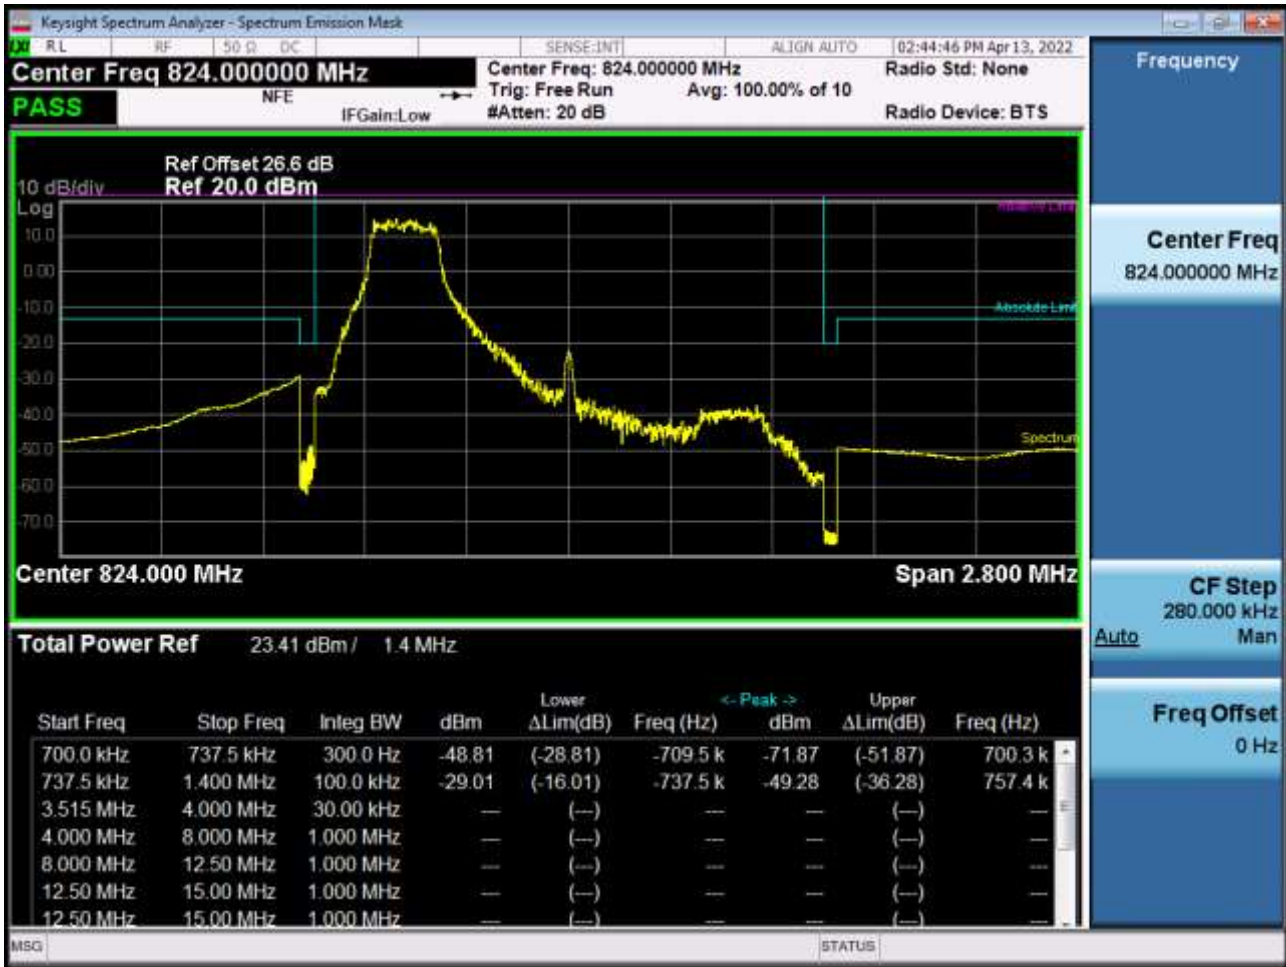


BAND 26. Channel Edge (1.4 MHz\_QPSK\_RB 1\_5)

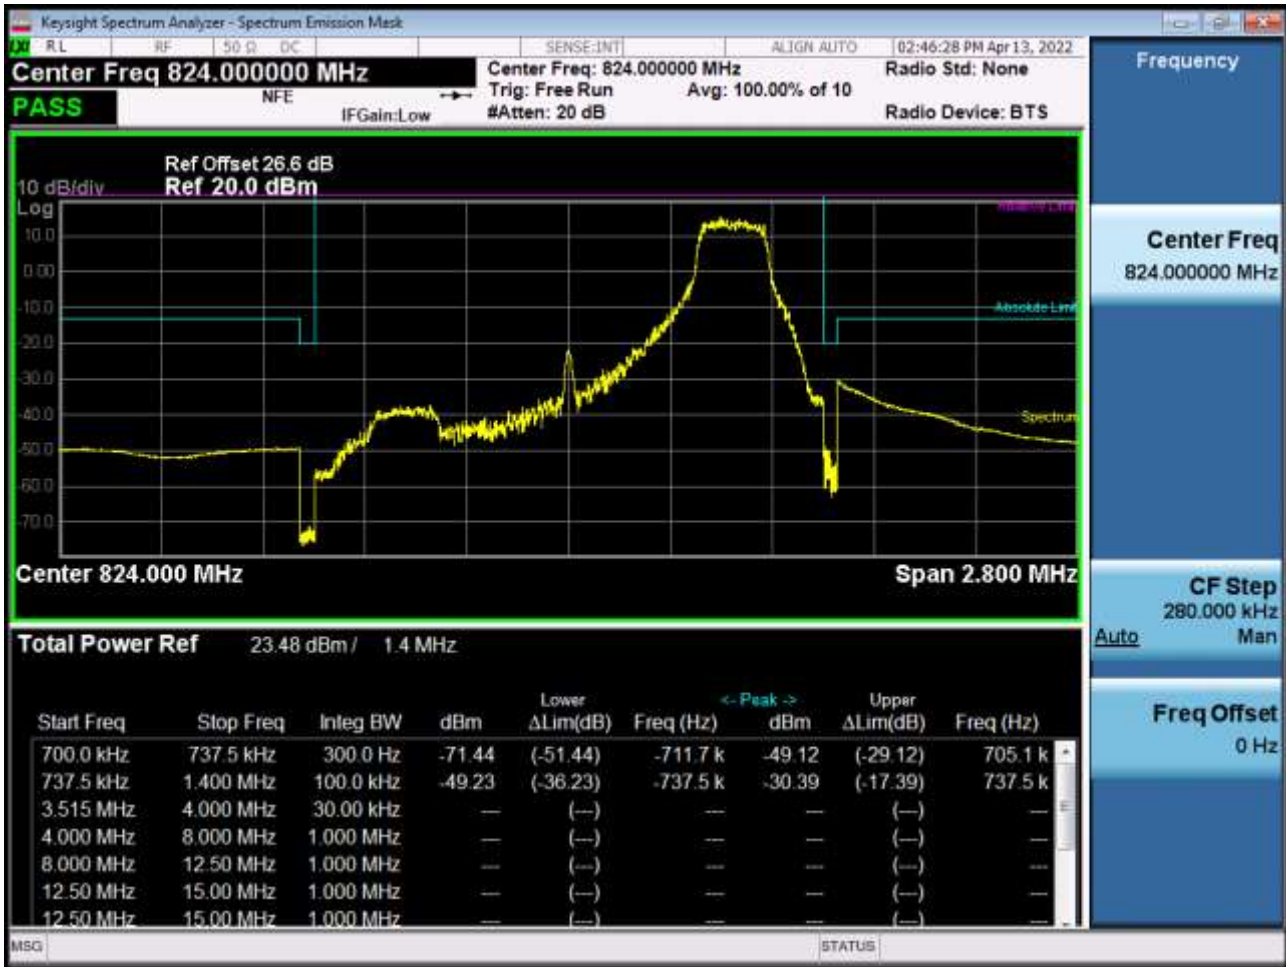

BAND 26. Channel Edge (1.4 MHz\_QPSK\_Full RB)

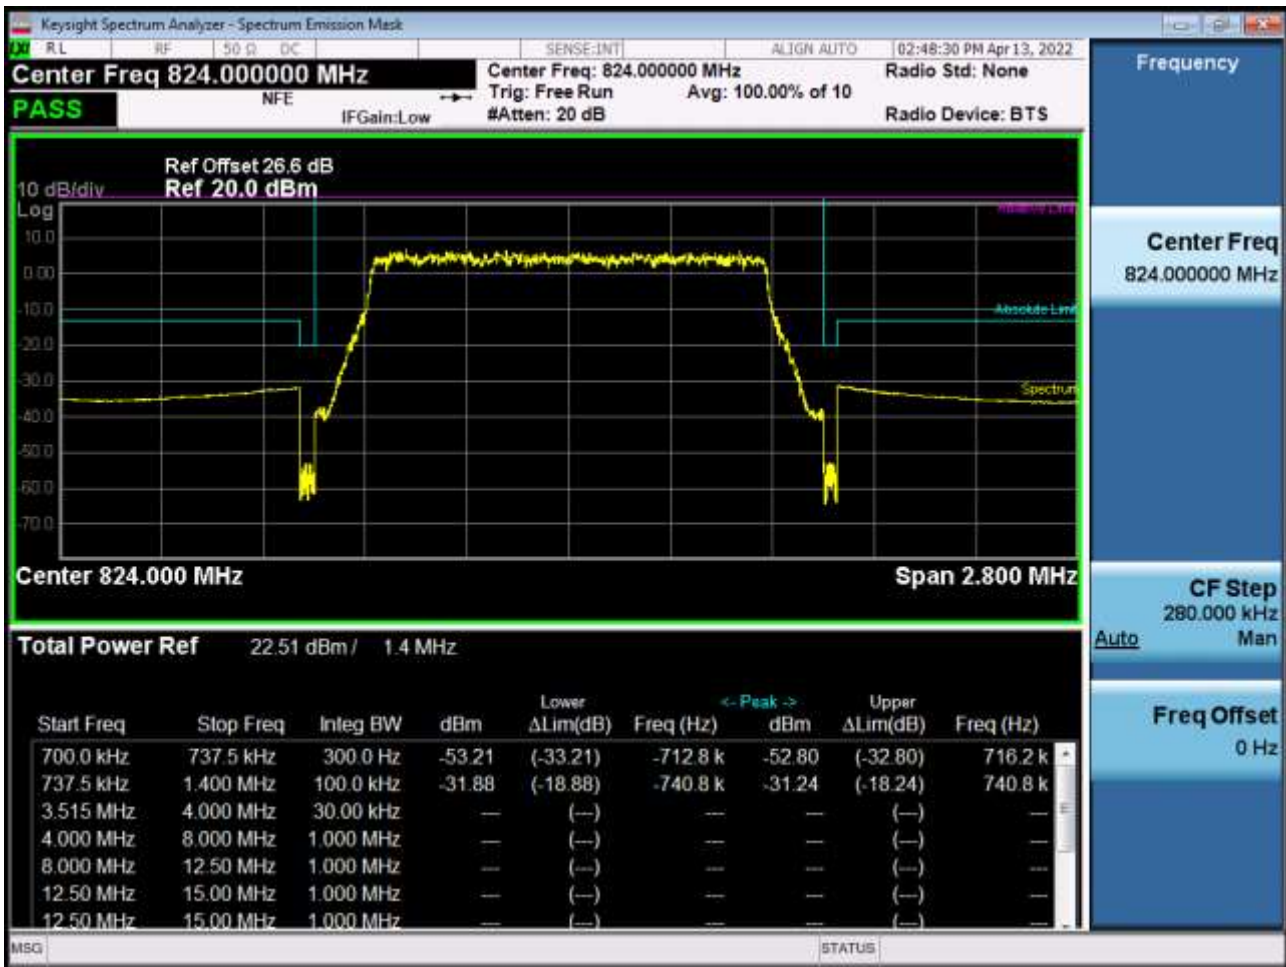


BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_0)

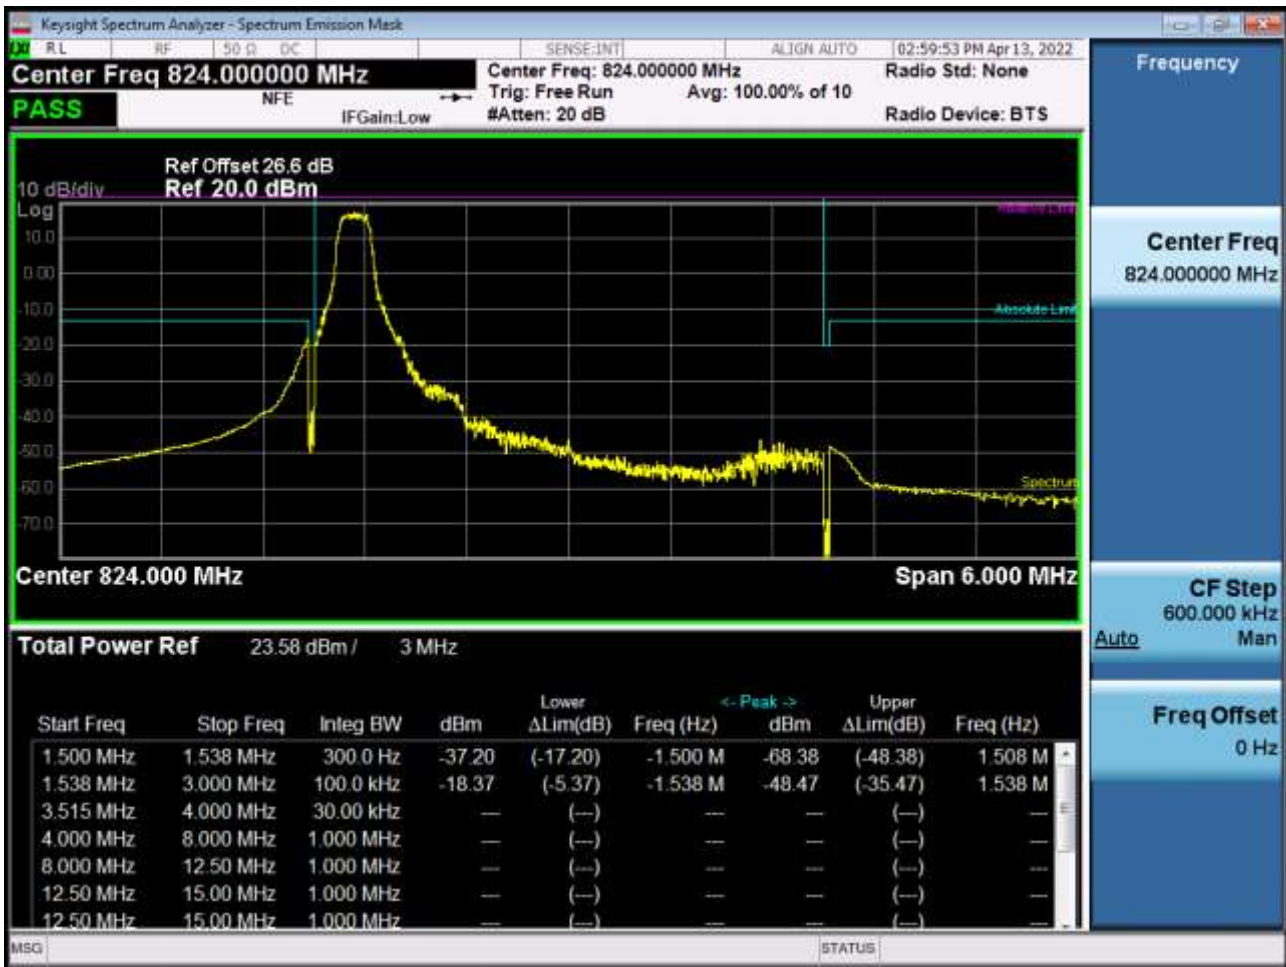




BAND 26. Channel Edge (3 MHz\_QPSK\_RB 1\_14)

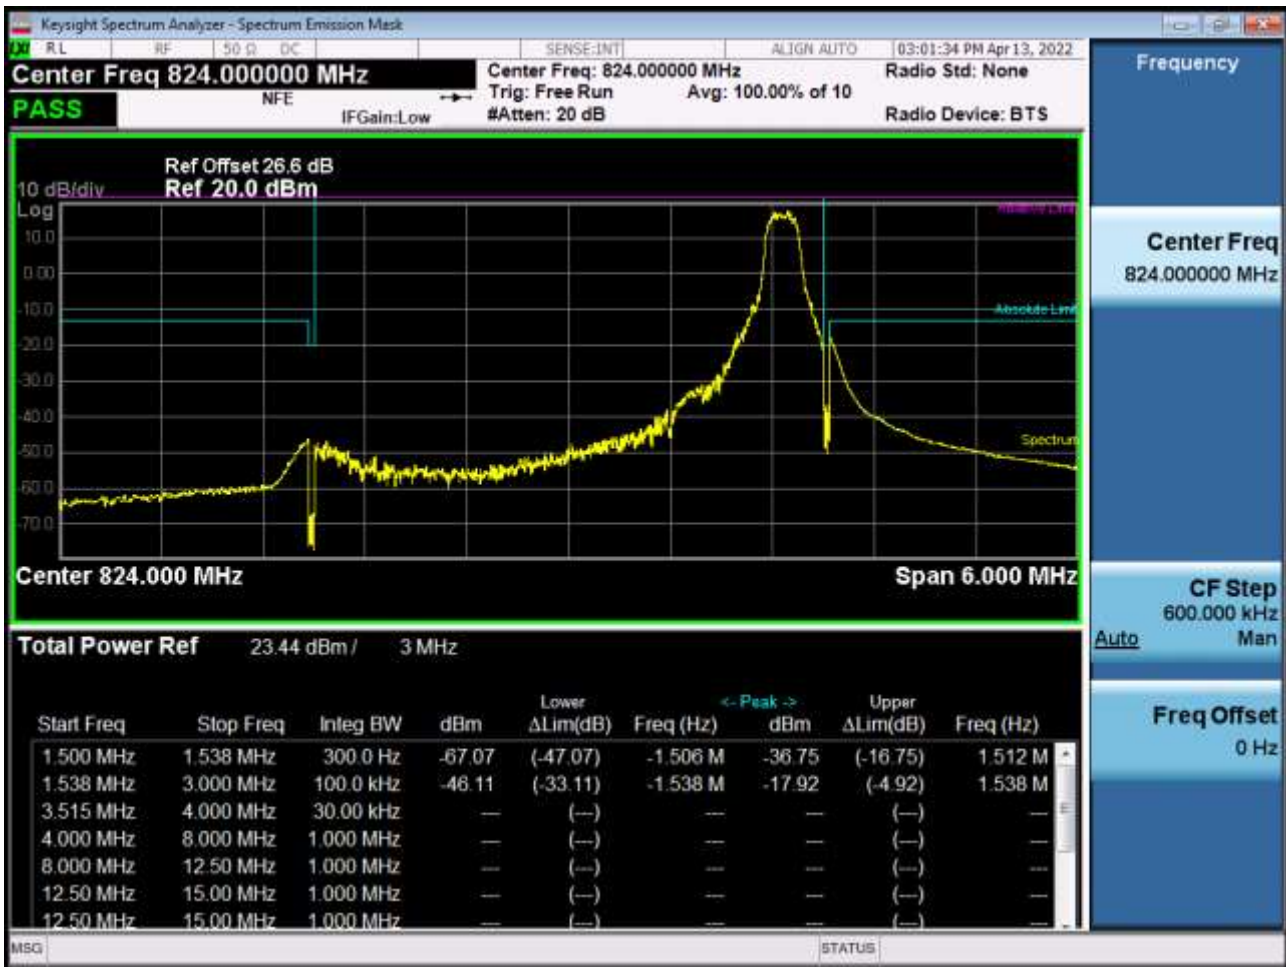

BAND 26. Channel Edge (3 MHz\_QPSK\_Full RB)




BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_0)

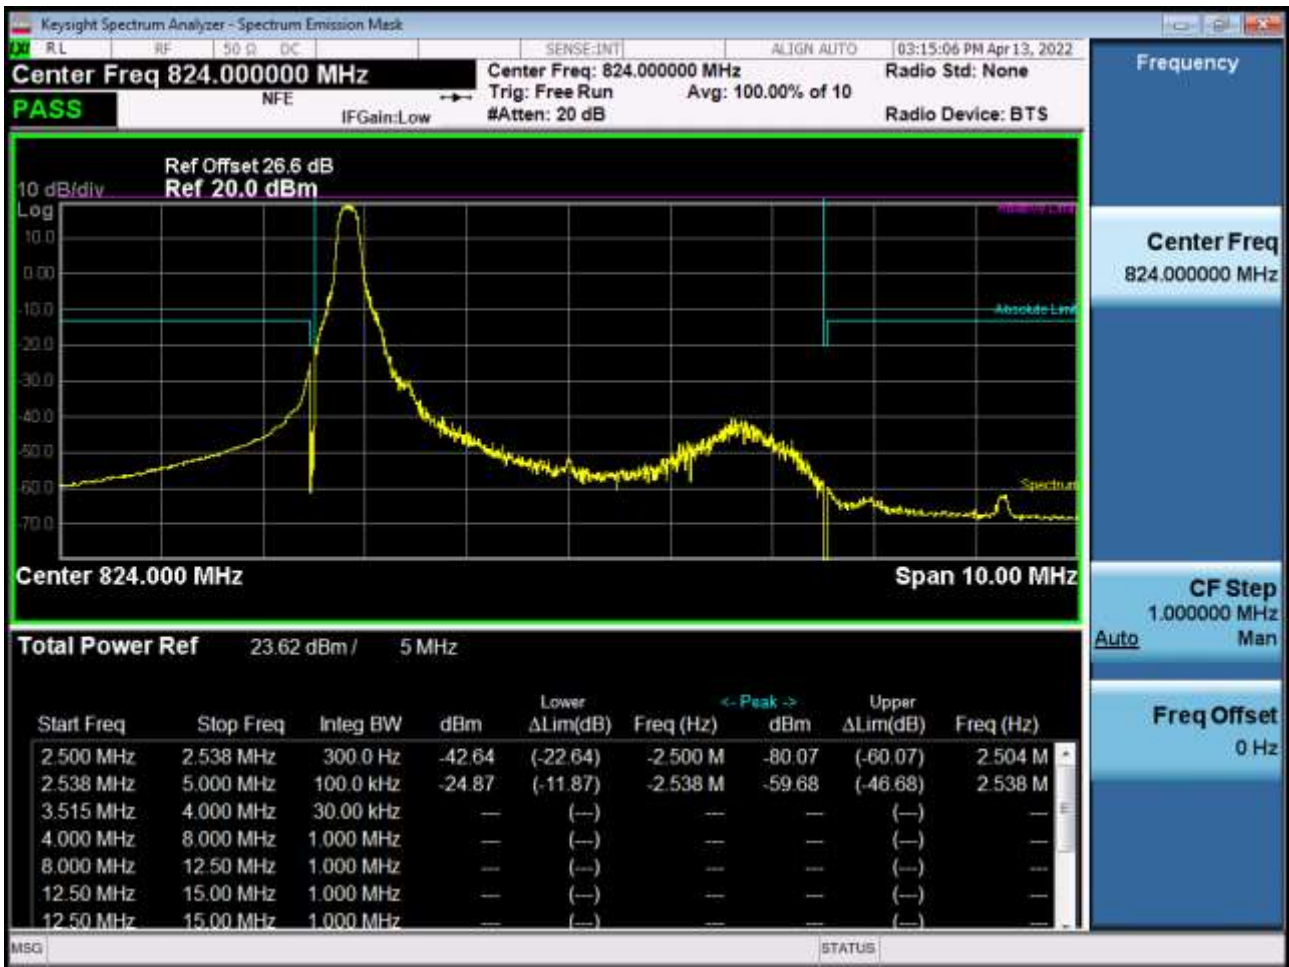




BAND 26. Channel Edge (5 MHz\_QPSK\_RB 1\_24)

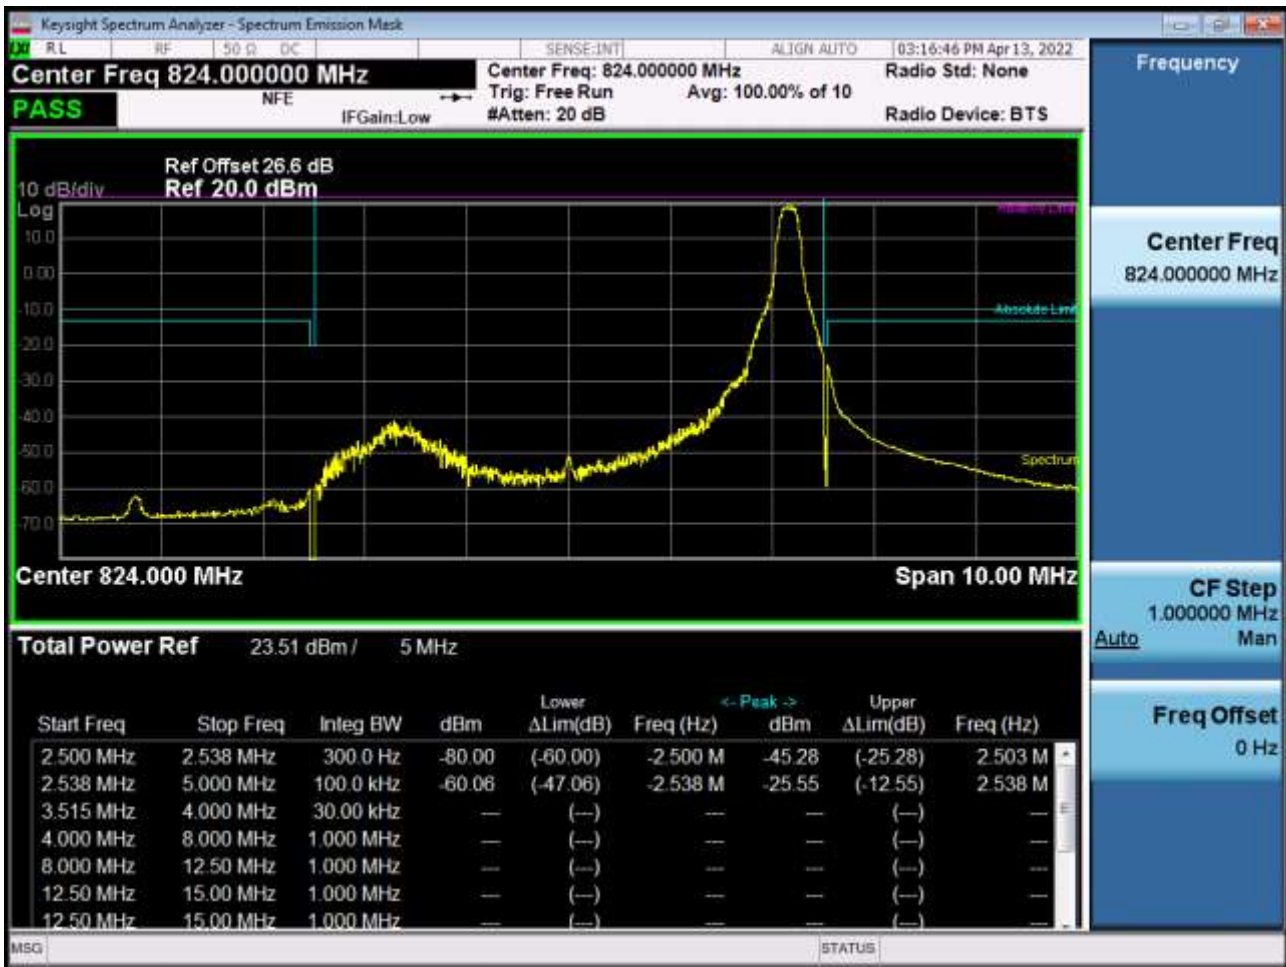


BAND 26. Channel Edge (5 MHz\_QPSK\_Full RB)



BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_0)

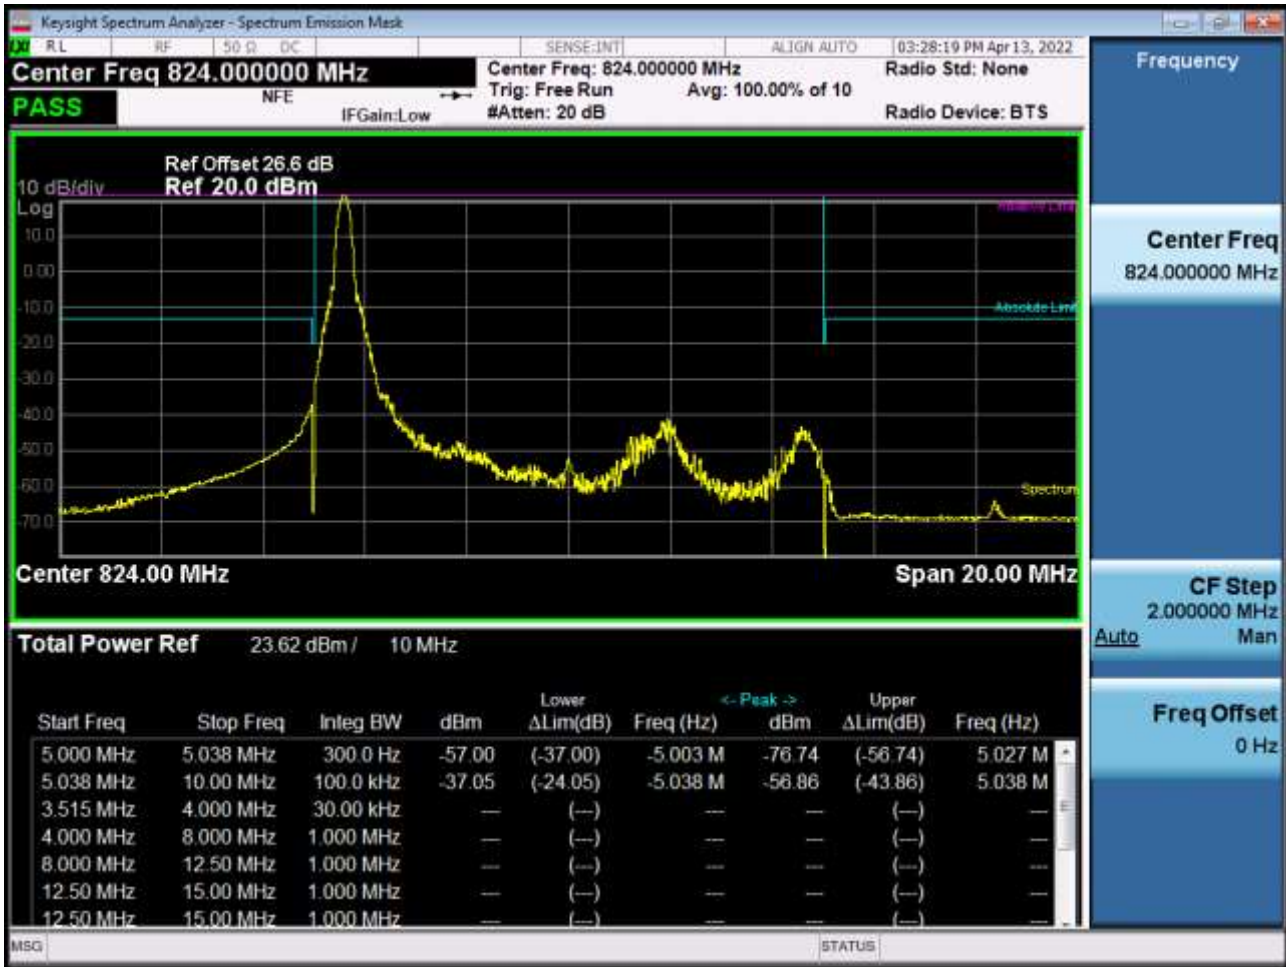

BAND 26. Channel Edge (10 MHz\_QPSK\_RB 1\_49)

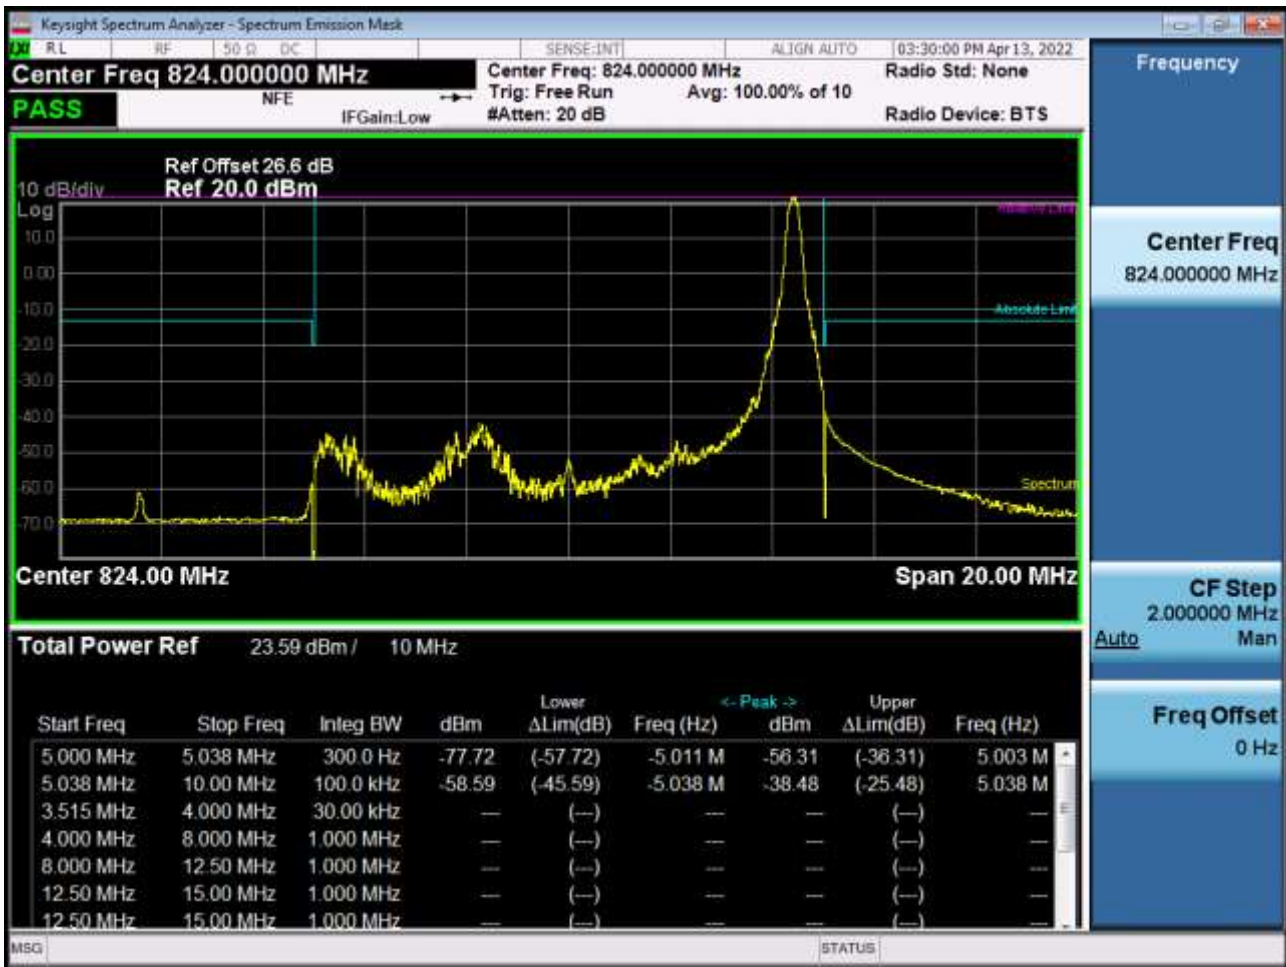

BAND 26. Channel Edge (10 MHz\_QPSK\_Full RB)






BAND 26. Band Edge (1.4 MHz\_QPSK\_RB 1\_5)



BAND 26. Band Edge (1.4 MHz\_QPSK\_FullIRB)

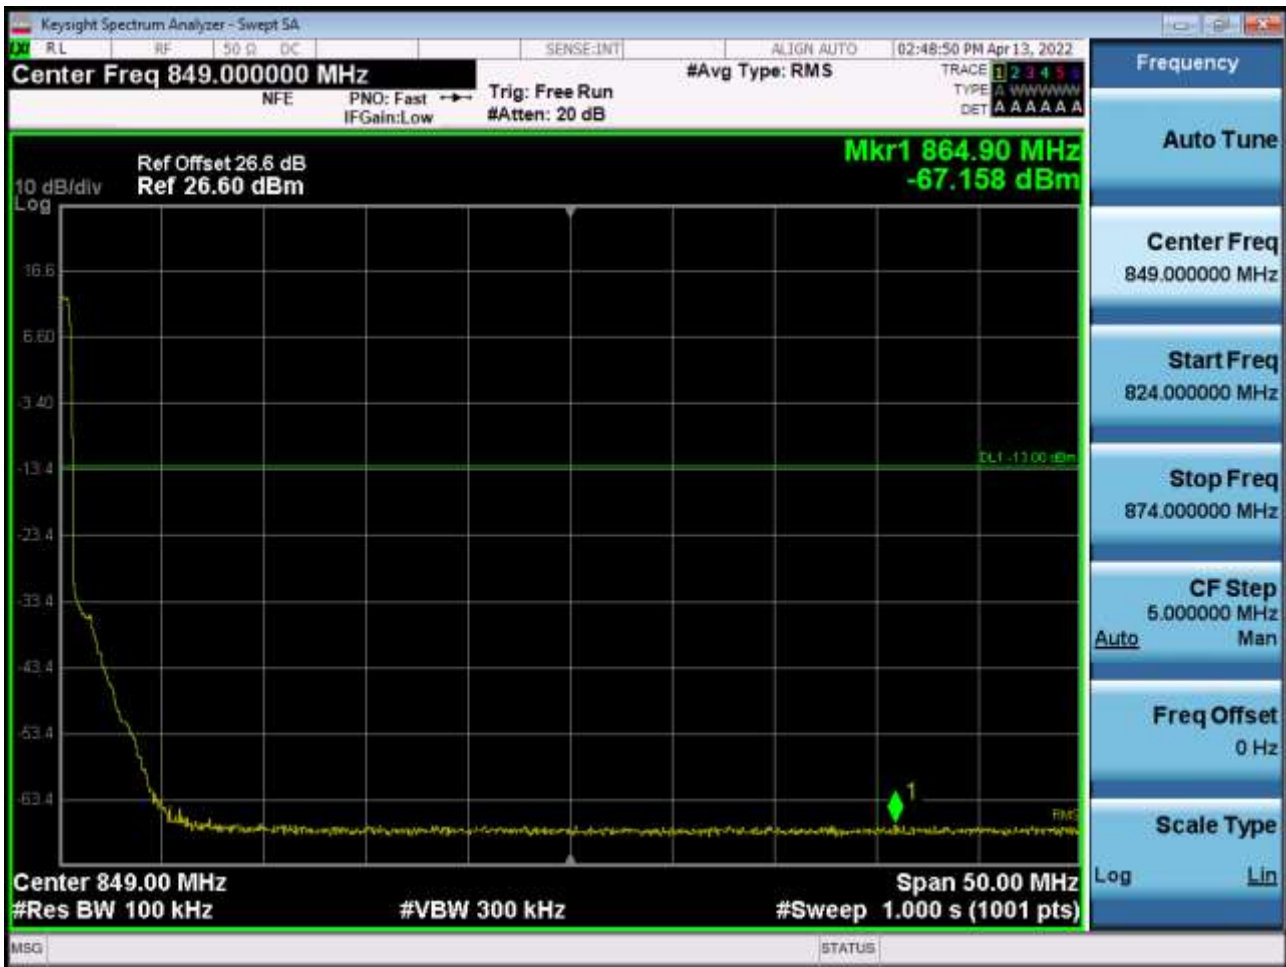

BAND 26. Band Edge (3 MHz\_QPSK\_RB 1\_14)





BAND 26. Band Edge (3 MHz\_QPSK\_ Full RB)




BAND 26. Band Edge (5 MHz\_QPSK\_RB 1\_24)



BAND 26. Band Edge (5 MHz\_QPSK\_ Full RB)



BAND 26. Band Edge (10 MHz\_QPSK\_RB 1\_49)

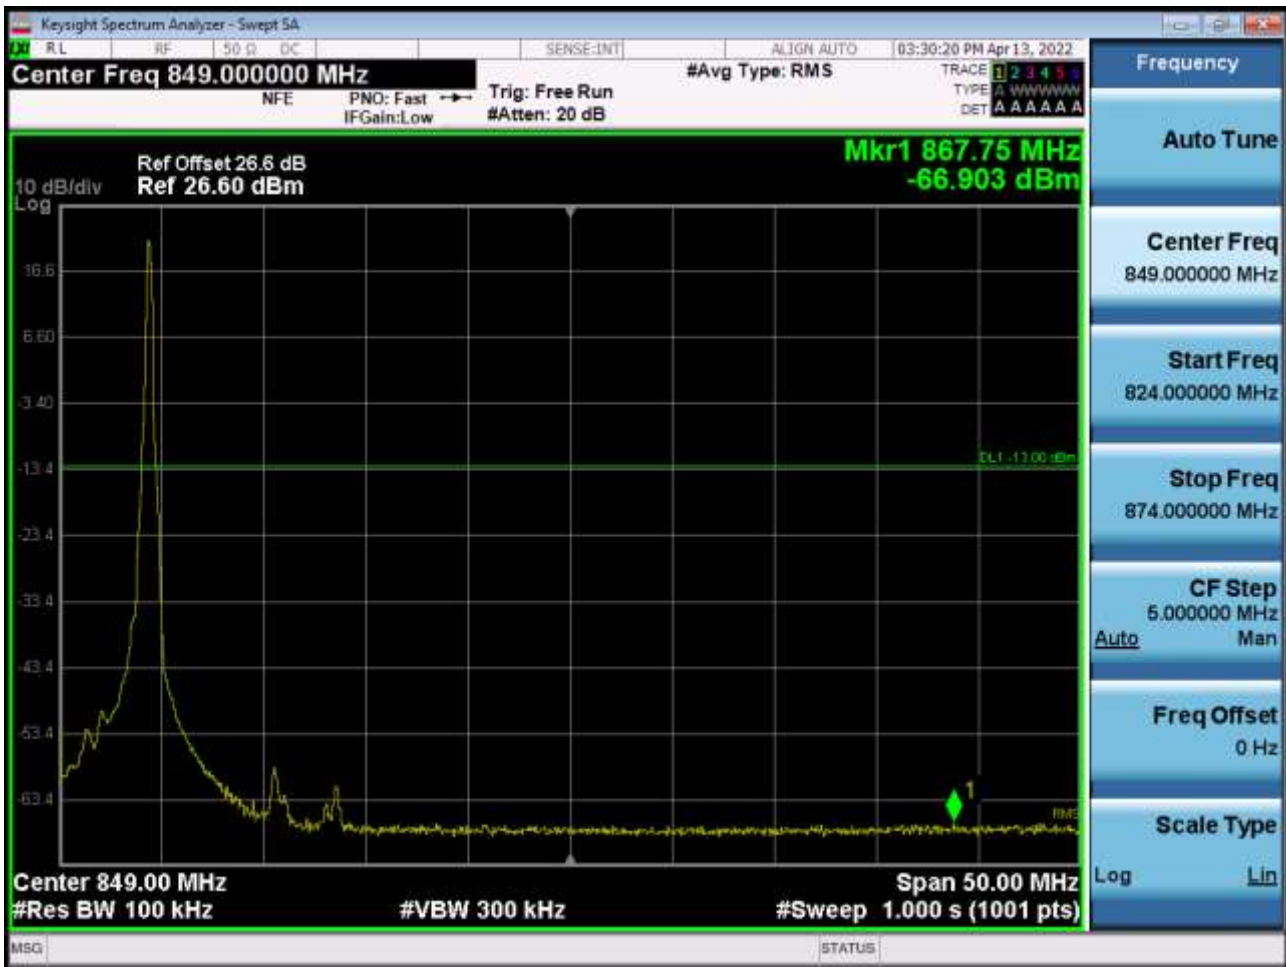

BAND 26. Band Edge (10 MHz\_QPSK\_ Full RB)



## 11 ANNEX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2204-FC026-P