

FCC NFC REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,
16677, Rep. of Korea

Date of Issue:
May 16, 2022

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-
si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-2203-FC039

FCC ID: A3LSMG736U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-G736U

Additional Model: SM-G736U1

EUT Type: Mobile Phone

RF Output Field Strength: 15.35 dB μ V/m @30 m

Frequency of Operation: 13.56 MHz

Modulation type: ASK

FCC Classification: Low Power Communication Device Transmitter (DXX)

FCC Rule Part(s): FCC Part 15.225 Subpart C

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2203-FC039

REVIEWED BY



Report prepared by : Woong Jin Kim
Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2203-FC039	May 16, 2022	- First Approval Report

Table of Contents

REVIEWED BY	2
1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	7
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. TEST SUMMARY	17
9. TEST RESULT	18
9.1. Operation within the band 13.110 MHz – 14.010 MHz.....	18
9.2. Radiated Emission 9kHz – 30 MHz	20
9.3. Radiated Emission 30MHz – 1000 MHz	21
9.4. 20 dB Bandwidth	22
9.5. Frequency Stability	23
9.6. POWERLINE CONDUCTED EMISSIONS	27
10. LIST OF TEST EQUIPMENT	31
11. ANNEX A_ TEST SETUP PHOTO	33

1. EUT DESCRIPTION

Model	SM-G736U
Additional Model	SM-G736U1
EUT Type	Mobile Phone
Power Supply	DC 3.86 V
Frequency of Operation	13.56 MHz
Transmit Power	15.35 dB μ V/m @30 m
Modulation Type	ASK
Date(s) of Tests	March 30, 2022 ~ March 31, 2022
Serial number	Radiated: R3CT30RXCMT

2. TEST METHODOLOGY

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) is used in the measurement of the test device.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.225 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013).

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

(1) The antennas of this E.U.T are permanently attached.

(2)The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.

The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

7. DESCRIPTION OF TESTS

7.1. Radiated Test

Limit (Operation within the band 13.110 MHz – 14.010 MHz)

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
13.553 – 13.567	15,848	30
$13.410 \leq f \leq 13.553$ $13.567 \leq f \leq 13.710$	334	30
$13.110 \leq f \leq 13.410$ $13.710 \leq f \leq 14.010$	106	30

Note:

1. $15,848 \mu\text{V/m} = 84.0\text{dB}\mu\text{V/m}$
2. $334 \mu\text{V/m} = 50.47 \text{dB}\mu\text{V/m}$
3. $106\mu\text{V/m} = 40.51\text{dB}\mu\text{V/m}$

Limit(Radiated Spurious Emissions)


Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 – 0.490	$2400/F(\text{kHz})$	300
0.490 – 1.705	$24000/F(\text{kHz})$	30
1.705 – 30	30	30
30-88	* 100	3
88-216	* 150	3
216-960	* 200	3
Above 960	500	3

※.


Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Test Configuration

Below 30 MHz

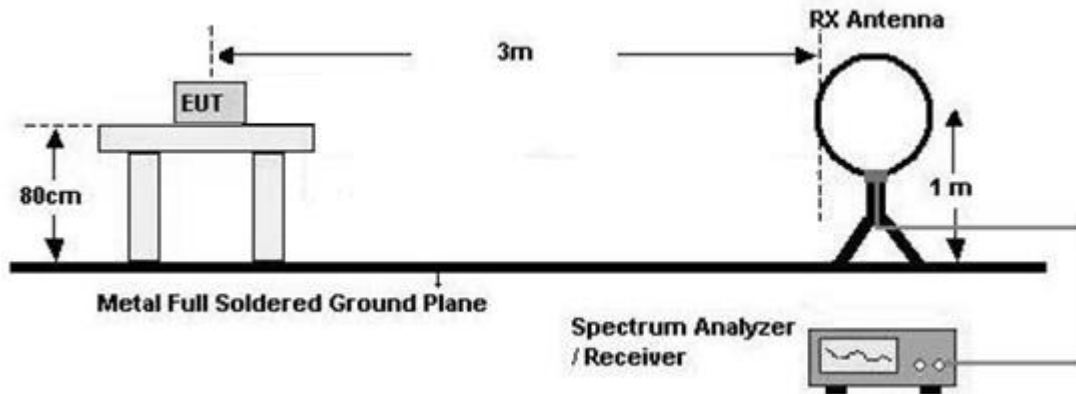

30 MHz - 1 GHz

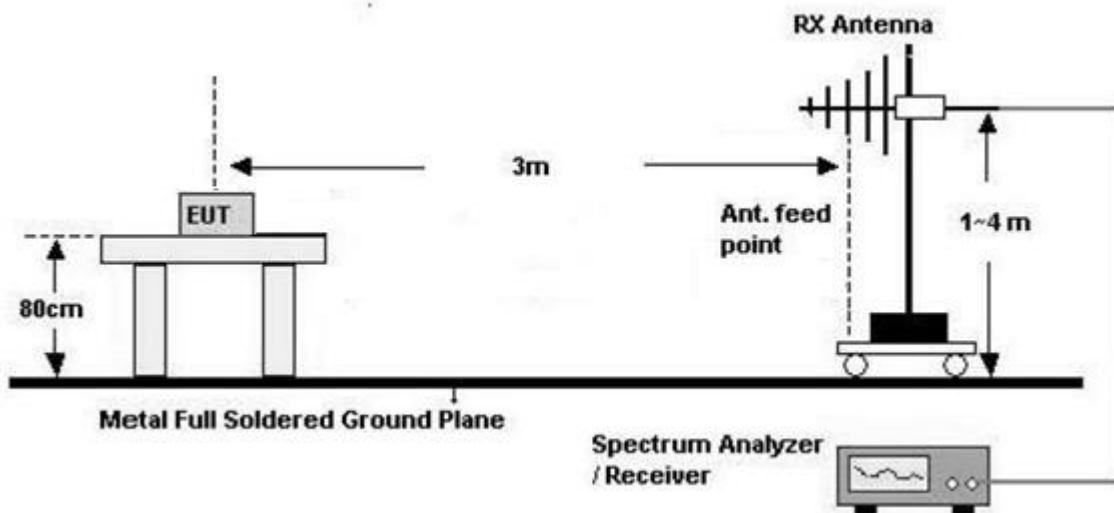

Test Procedure of in-band

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor = $40\log(3\text{ m}/30\text{ m}) = -40\text{ dB}$
Measurement Distance : 3 m(Below30 MHz)
7. Spectrum Setting

- Detector = Peak
- Trace = Max Hold
- RBW = 9 kHz
- VBW $\geq 3 \times$ RBW

8.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Test Procedure of Radiated spurious emissions(Below30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3 m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times$ RBW
- 9.Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Above30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3 m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - Frequency Range = 30 MHz ~ 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
7. Total = Measured Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

7.2. 20 dB Bandwidth

Test Configuration

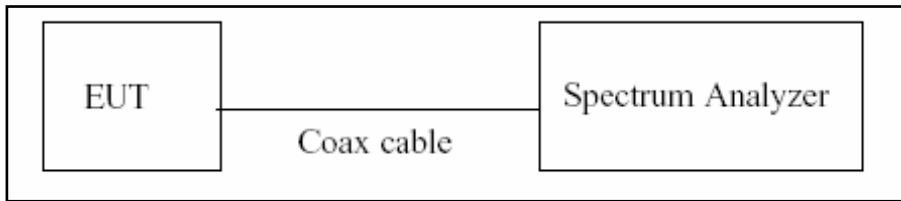

Test Procedure

The 20 dB bandwidth was measured by using a spectrum analyzer.

(Procedure 6.9.2 in ANSI 63.10-2013)

- 1) RBW = 1%~5% of the OBW
- 2) VBW = approximately three times RBW
- 3) Span = between two times and five times the OBW
- 4) Detector = Peak
- 5) Trace mode = Max hold
- 6) Allow the trace to stabilize

Note :


We tested Occupied Bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Frequency Stability

Limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Test Configuration

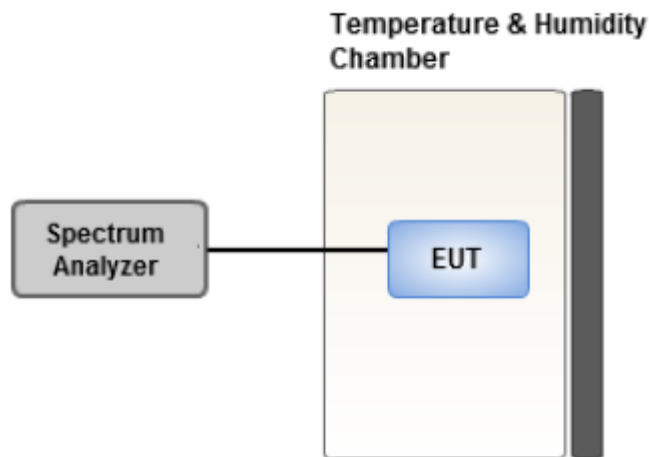

Test Procedure.

For battery operated equipment, the equipment tests shall be performed using a new battery.

- 1) Turn the EUT OFF and place it inside the environmental temperature chamber.
For devices that have oscillator heaters, energize only the heater circuit.
- 2) Set the temperature control on the chamber to the highest specified in the regulatory requirements for the type of device and allow the oscillator heater and the chamber temperature to stabilize.
- 3) While maintaining a constant temperature inside the environmental chamber, turn the EUT ON and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized. Four measurements in total are made.
- 4) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency.

Note:

- 1) Temperature:
The temperature is varied from -20°C to $+50^{\circ}\text{C}$ using an environmental chamber.
- 2) Primary Supply Voltage :
The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment.
For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

7.4. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.
5. The EUT is the device operating below 30 MHz.
 - For unterminated the Antenna, the AC line conducted tests are performed with the antenna connected
 - For terminated the Antenna, the AC line conducted tests are performed with a dummy load connected to the EUT antenna output terminal.

Sample Calculation

Quasi-peak(Final Result) = Measured Value + Correction Factor

7.5. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + external accessories(Earphone, etc)
 - Worst case : Stand alone
2. EUT Axis : Y
3. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
4. All mode of without tag and with tag were investigated and the worst case configuration results are reported.
 - Worst case : Without Tag
5. All position of loop antenna were investigated and the worst case configuration results are reported.
 - Position : Horizontal, Vertical, Parallel to the ground plane
 - Worst case : Horizontal
6. SM-G736U, SM-G736U1 were tested and the worst case results are reported.
(Worst case : SM-G736U)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Earphone + Travel Adapter, Stand alone + Travel Adapter
 - Worst case : Stand alone + Travel Adapter
2. All modes(For unterminated the Antenna, terminated the Antenna) of operation were investigated and the worst case configuration results are reported.
 - Worst case : Unterminated the Antenna
3. SM-G736U, SM-G736U1 were tested and the worst case results are reported.
(Worst case : SM-G736U)

20 dB Bandwidth & Frequency Stability

1. All type and bitrate were investigated and the worst case results are reported.
 - Worst case : Type A, 106 kbps
2. SM-G736U, SM-G736U1 were tested and the worst case results are reported.
(Worst case : SM-G736U)

8. TEST SUMMARY

Regulation	Requirement	Result
Part 15.225 (a)	Radiated Electric Field Emissions (13.553MHz to 13.567MHz)	Pass
Part 15.225 (b)	Radiated Electric Field Emissions ($13.410 \leq f \leq 13.553$, $13.567 \leq f \leq 13.710$)	Pass
Part 15.225 (c)	Radiated Electric Field Emissions ($13.110 \leq f \leq 13.410$, $13.710 \leq f \leq 14.010$)	Pass
Part 15.209	Radiated Electric Field Emissions (9kHz to 30MHz)	Pass
Part 15.209	Radiated Electric Field Emissions (30MHz to 1GHz)	Pass
Part 15.225 (e)	Frequency Stability	Pass
Part 15.207	AC power conducted emissions (150kHz to 30MHz)	Pass
Part 15.215 (c)	20 dB Bandwidth	Pass

9. TEST RESULT

9.1. Operation within the band 13.110 MHz – 14.010 MHz


Measured Frequency Range : 13.553 MHz-13.567 MHz							
Frequency (MHz)	Measured Value (dB μ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB μ V/m) @30 m	Limit (dB μ V/m) @30 m	Margin (dB)
13.5599	35.09	20.26	-40.00	H	15.35	84.00	68.65
13.5596	30.51	20.26	-40.00	V	10.77	84.00	73.23

Measured Frequency Range : 13.410 MHz-13.553 MHz and 13.567 MHz-13.710 MHz							
Frequency (MHz)	Measured Value (dB μ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB μ V/m) @30 m	Limit (dB μ V/m) @30 m	Margin (dB)
13.5529	29.76	20.26	-40.00	H	10.02	50.47	40.45
13.5671	29.12	20.26	-40.00	H	9.38	50.47	41.09


Measured Frequency Range : 13.110 MHz – 13.410 MHz and 13.710 MHz-14.010 MHz							
Frequency (MHz)	Measured Value (dB μ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB μ V/m) @30 m	Limit (dB μ V/m) @30 m	Margin (dB)
13.3473	20.81	20.26	-40.00	H	1.07	40.51	39.44
13.7719	20.40	20.26	-40.00	H	0.66	40.51	39.85

Test Plot

13.553 MHz ~ 13.567 MHz

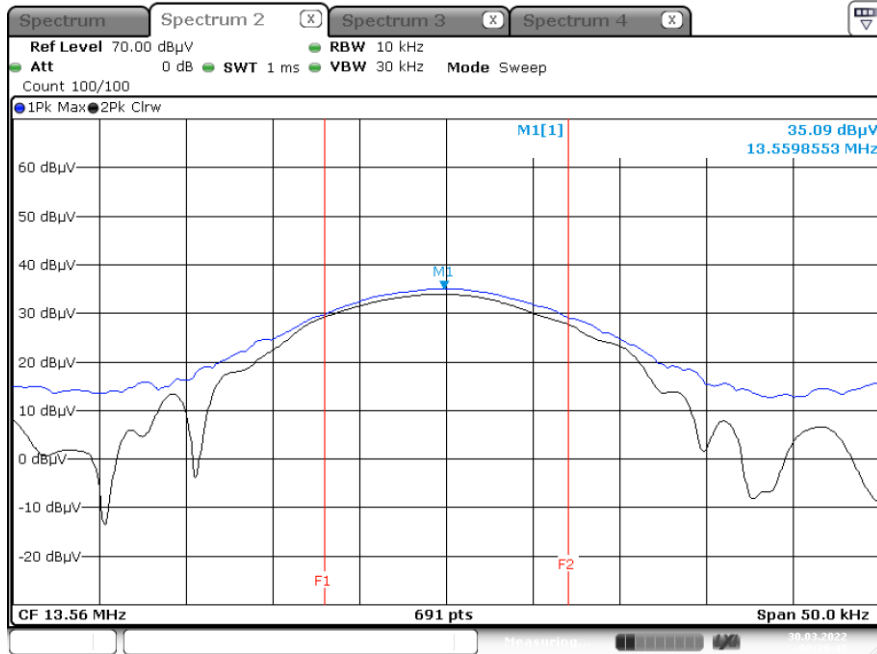

Worst Case (13.410 MHz ~ 13.553 MHz)

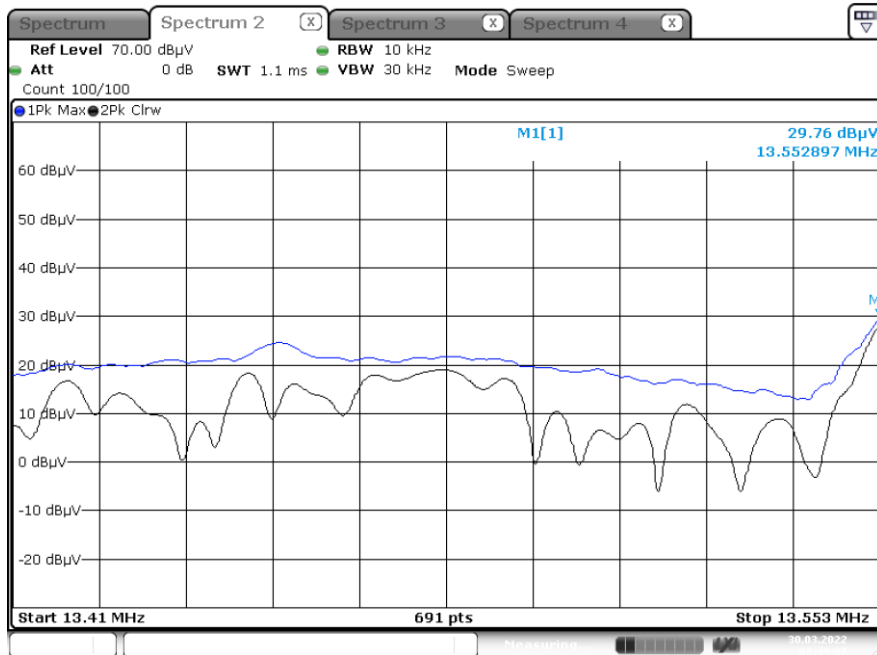

Note:

Plot of worst case are only reported.

9.2. Radiated Emission 9kHz – 30 MHz

Measured Frequency Range :							
9 kHz - 30 MHz							
Frequency (MHz)	Measured Value (dB μ V/m) @3 m	Ant. Factor +Cable Loss (dB/m)	Distance Correction (dB)	Ant. POL (H/V)	Total (dB μ V/m) @30 m	Limit (dB μ V/m) @30 m	Margin (dB)
7.6107	13.41	20.21	-40.00	H	-6.38	29.54	35.92
14.0876	12.23	20.26	-40.00	H	-7.51	29.54	37.05
27.1206	9.23	20.76	-40.00	H	-10.01	29.54	39.55
27.1211	9.01	20.76	-40.00	V	-10.23	29.54	39.77


9.3. Radiated Emission 30MHz – 1000 MHz

Measured Frequency Range : 30 MHz - 1000 MHz							
Frequency (MHz)	Measured Value (dBμV/m) @3 m	Ant. Factor (dB/m)	Cable Loss (dB)	Ant. Pol (H/V)	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
35.8665	7.24	18.37	0.72	H	26.33	40.00	13.67
# 38.0487	7.38	18.80	0.74	H	26.92	40.00	13.08
106.1725	6.73	15.70	1.23	V	23.66	43.50	19.85
# 118.3390	6.54	16.80	1.29	H	24.63	43.50	18.87
# 126.4410	7.86	17.50	1.34	H	26.70	43.50	16.80
161.6463	7.57	19.30	1.50	V	28.37	43.50	15.13

Note:

1. # is the result for restricted band.

Test Plot

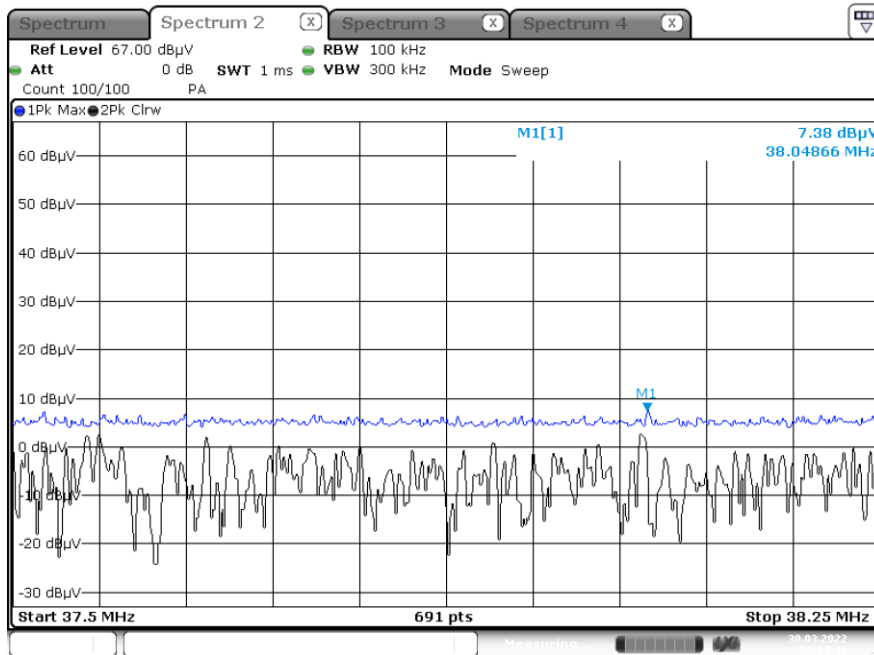

Note:

Plot of worst case are only reported

9.4. 20 dB Bandwidth



9.5. Frequency Stability

Startup

PERATING FREQUENCY: 13.56 MHz
REFERENCE VOLTAGE: 3.86 VDC
DEVIATION LIMIT: ±0.01 % = ± 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.86	-20	13.560063	63	0.0004628
100%		-10	13.560057	57	0.0004221
100%		0	13.560053	53	0.0003945
100%		+10	13.560051	51	0.0003757
100%		+20(Ref.)	13.560046	46	0.0003357
100%		+30	13.560049	49	0.0003577
100%		+40	13.560057	57	0.0004190
100%		+50	13.560060	60	0.0004432
LOW	3.75	+20	13.560065	65	0.0004810
HIGH	4.40	+20	13.560060	60	0.0004426

2 minutesOPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.86 VDCDEVIATION LIMIT: ±0.01 % = ± 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.86	-20	13.560066	66	0.0004875
100%		-10	13.560060	60	0.0004410
100%		0	13.560056	56	0.0004163
100%		+10	13.560054	54	0.0003953
100%		+20(Ref.)	13.560050	50	0.0003662
100%		+30	13.560053	53	0.0003932
100%		+40	13.560063	63	0.0004630
100%		+50	13.560067	67	0.0004926
LOW	3.75	+20	13.560068	68	0.0005015
HIGH	4.40	+20	13.560070	70	0.0005162

5 minutes

PERATING FREQUENCY: 13.56 MHz
 REFERENCE VOLTAGE: 3.86 VDC
 DEVIATION LIMIT: ±0.01 % = ± 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.86	-20	13.560066	66	0.0004902
100%		-10	13.560060	60	0.0004410
100%		0	13.560056	56	0.0004156
100%		+10	13.560054	54	0.0003987
100%		+20(Ref.)	13.560051	51	0.0003776
100%		+30	13.560054	54	0.0003990
100%		+40	13.560063	63	0.0004676
100%		+50	13.560069	69	0.0005055
LOW	3.75	+20	13.560069	69	0.0005093
HIGH	4.40	+20	13.560068	68	0.0005015

10 minutesOPERATING FREQUENCY: 13.56 MHzREFERENCE VOLTAGE: 3.86 VDCDEVIATION LIMIT: ±0.01 % = ± 1356 Hz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (MHz)	Frequency Dev. (Hz)	Frequency Dev (%)
100%	3.86	-20	13.560070	70	0.0005186
100%		-10	13.560064	64	0.0004718
100%		0	13.560060	60	0.0004395
100%		+10	13.560057	57	0.0004222
100%		+20(Ref.)	13.560054	54	0.0003973
100%		+30	13.560058	58	0.0004250
100%		+40	13.560066	66	0.0004845
100%		+50	13.560071	71	0.0005241
LOW	3.75	+20	13.560072	72	0.0005274
HIGH	4.40	+20	13.560075	75	0.0005531

9.6. POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : SM-G736U
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : NFC_L1_Unterm
 Operator Name:
 Comment:

Full Spectrum

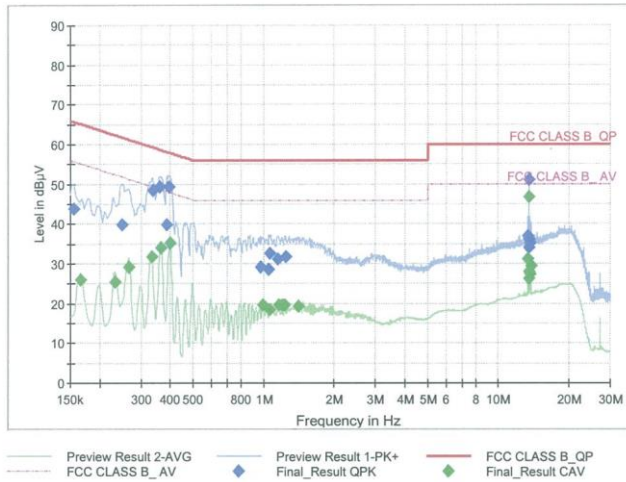

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	43.82	65.75	21.93	9.000	L1	OFF	9.6
0.2490	39.77	61.79	22.02	9.000	L1	OFF	9.6
0.3368	48.53	59.28	10.75	9.000	L1	OFF	9.6
0.3615	49.39	58.69	9.31	9.000	L1	OFF	9.6
0.3863	39.82	58.14	18.32	9.000	L1	OFF	9.6
0.3953	49.40	57.95	8.55	9.000	L1	OFF	9.6
0.9658	29.23	56.00	26.77	9.000	L1	OFF	9.7
1.0558	28.63	56.00	27.37	9.000	L1	OFF	9.7
1.0670	32.47	56.00	23.53	9.000	L1	OFF	9.7
1.1458	31.16	56.00	24.84	9.000	L1	OFF	9.7
1.1503	31.17	56.00	24.83	9.000	L1	OFF	9.7
1.2380	31.79	56.00	24.21	9.000	L1	OFF	9.7
13.3475	36.95	60.00	23.05	9.000	L1	OFF	10.2
13.4465	33.91	60.00	26.09	9.000	L1	OFF	10.2
13.4555	35.98	60.00	24.02	9.000	L1	OFF	10.2
13.4713	34.09	60.00	25.91	9.000	L1	OFF	10.2
13.5590	51.10	60.00	8.90	9.000	L1	OFF	10.2
13.6670	35.34	60.00	24.66	9.000	L1	OFF	10.2

2022-03-30

오후 6:59:09

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1658	25.86	55.17	29.31	9.000	L1	OFF	9.6
0.2333	25.41	52.33	26.92	9.000	L1	OFF	9.6
0.2648	29.17	51.28	22.11	9.000	L1	OFF	9.6
0.3323	31.85	49.40	17.54	9.000	L1	OFF	9.6
0.3638	34.09	48.64	14.55	9.000	L1	OFF	9.6
0.3975	35.12	47.91	12.79	9.000	L1	OFF	9.6
0.9950	19.68	46.00	26.32	9.000	L1	OFF	9.7
1.0670	18.39	46.00	27.61	9.000	L1	OFF	9.7
1.1615	19.66	46.00	26.34	9.000	L1	OFF	9.7
1.1953	19.49	46.00	26.51	9.000	L1	OFF	9.7
1.2313	19.71	46.00	26.29	9.000	L1	OFF	9.7
1.4023	19.31	46.00	26.69	9.000	L1	OFF	9.7
13.3475	31.06	50.00	18.94	9.000	L1	OFF	10.2
13.4533	28.04	50.00	21.96	9.000	L1	OFF	10.2
13.4668	26.23	50.00	23.77	9.000	L1	OFF	10.2
13.5590	46.59	50.00	3.41	9.000	L1	OFF	10.2
13.6648	27.37	50.00	22.63	9.000	L1	OFF	10.2
13.7728	29.35	50.00	20.65	9.000	L1	OFF	10.2

2022-03-30

오후 6:59:09

Conducted Emissions (Line 2)

Test


1 / 2

Test Report

Common Information

EUT : SM-G736U
 Manufacturer : SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions : NFC_N_Unterm
 Operator Name:
 Comment:

Full Spectrum

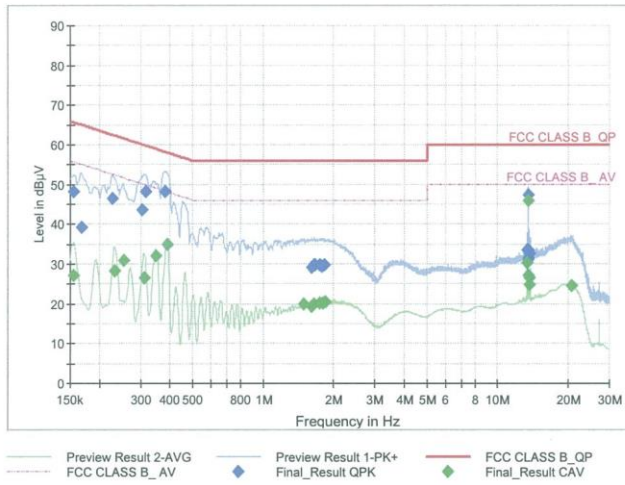

Final Result QPK

Frequency (MHz)	QuasiPeak (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	48.06	65.75	17.69	9.000	N	OFF	9.6
0.1680	39.28	65.06	25.77	9.000	N	OFF	9.6
0.2265	46.30	62.58	16.28	9.000	N	OFF	9.6
0.3030	43.46	60.16	16.70	9.000	N	OFF	9.6
0.3165	48.24	59.80	11.56	9.000	N	OFF	9.6
0.3818	48.31	58.24	9.93	9.000	N	OFF	9.6
1.6138	29.17	56.00	26.83	9.000	N	OFF	9.7
1.6453	29.70	56.00	26.30	9.000	N	OFF	9.7
1.6588	29.83	56.00	26.17	9.000	N	OFF	9.7
1.7443	29.76	56.00	26.24	9.000	N	OFF	9.7
1.7848	29.43	56.00	26.57	9.000	N	OFF	9.7
1.8140	29.60	56.00	26.40	9.000	N	OFF	9.7
13.3475	33.55	60.00	26.45	9.000	N	OFF	10.2
13.4533	33.41	60.00	26.59	9.000	N	OFF	10.2
13.4623	31.48	60.00	28.52	9.000	N	OFF	10.2
13.4780	31.05	60.00	28.95	9.000	N	OFF	10.2
13.5590	47.35	60.00	12.65	9.000	N	OFF	10.2
13.6670	32.66	60.00	27.34	9.000	N	OFF	10.2

2022-03-30

오후 6:48:22

Test

2 / 2

Final Result CAV

Frequency (MHz)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1545	27.07	55.75	28.68	9.000	N	OFF	9.6
0.2333	28.21	52.33	24.12	9.000	N	OFF	9.6
0.2535	30.82	51.64	20.82	9.000	N	OFF	9.6
0.3120	26.59	49.92	23.33	9.000	N	OFF	9.6
0.3503	31.95	48.96	17.01	9.000	N	OFF	9.6
0.3885	34.80	48.10	13.29	9.000	N	OFF	9.6
1.4900	19.79	46.00	26.21	9.000	N	OFF	9.7
1.6183	19.19	46.00	26.81	9.000	N	OFF	9.7
1.6475	19.91	46.00	26.09	9.000	N	OFF	9.7
1.7330	20.06	46.00	25.94	9.000	N	OFF	9.7
1.8118	20.30	46.00	25.70	9.000	N	OFF	9.7
1.8500	20.62	46.00	25.38	9.000	N	OFF	9.7
13.3475	30.22	50.00	19.78	9.000	N	OFF	10.2
13.4533	27.21	50.00	22.79	9.000	N	OFF	10.2
13.5590	45.82	50.00	4.18	9.000	N	OFF	10.2
13.6468	24.69	50.00	25.31	9.000	N	OFF	10.2
13.6648	26.55	50.00	23.45	9.000	N	OFF	10.2
20.6420	24.56	50.00	25.44	9.000	N	OFF	10.5

2022-03-30

오후 6:48:22

10. LIST OF TEST EQUIPMENT

Conducted Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
LISN	ENV216	Rohde & Schwarz	102245	08/23/2022	Annual
EMI Test Receiver	ESR	Rohde & Schwarz	101910	06/17/2022	Annual
Temperature Chamber	SU-642	ESPEC	0093008124	03/04/2023	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
DC Power Supply	E3632A	Agilent	KR75303243	04/25/2023	Annual
Attenuator(10 dB)(DC-26.5 GHz)	8493C	HP	07560	06/18/2022	Annual
Software	EMC32	Rohde & Schwarz	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Equipment	Model	Manufacturer	Serial No.	Due to Calibration	Calibration Interval
Controller(Antenna mast)	CO3000	Innco system	CO3000-4p	N/A	N/A
Antenna Position Tower	MA4640/800-XP-EP	Innco system	N/A	N/A	N/A
EM1000 / Controller	EM1000	Audix	060520	N/A	N/A
Turn Table	N/A	Audix	N/A	N/A	N/A
Loop Antenna	FMZB 1513	Rohde & Schwarz	1513-333	03/17/2024	Biennial
Hybrid Antenna	VULB 9168	Schwarzbeck	9168-0895	09/04/2022	Biennial
Horn Antenna	BBHA 9120D	Schwarzbeck	9120D-1300	01/18/2024	Biennial
Spectrum Analyzer	FSV(10 Hz ~ 40 GHz)	Rohde & Schwarz	101055	05/14/2022	Annual
Signal Analyzer	N9030A	Agilent	MY49432108	03/08/2023	Annual
ATT(10dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
ATT(3dB) + LNA1(1~18GHz)	FMSR -05B	TNM system	None	01/19/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2203-FC039-P