



FCC CFR47 PART 15 SUBPART C

**BLUETOOTH LOW ENERGY
CERTIFICATION TEST REPORT**

FOR

GSM/WCDMA/LTE Phablet + Bluetooth, DTS/UNII a/b/g/n, ANT+ & NFC

MODEL NUMBER: SM-G7508Q

FCC ID: A3LSMG7508Q

REPORT NUMBER: 14U18167-3 REVISION A

ISSUE DATE: July 21, 2014

Prepared for

**SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

Prepared by

**UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	7/11/14	Initial Issue	P. Zhang
A	7/21/14	Updated test date	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
6. TEST AND MEASUREMENT EQUIPMENT	10
7. SUMMARY	11
8. ANTENNA PORT TEST RESULTS	12
8.1. <i>6 dB BANDWIDTH.....</i>	<i>12</i>
8.2. <i>99% BANDWIDTH.....</i>	<i>16</i>
8.3. <i>OUTPUT POWER.....</i>	<i>20</i>
8.4. <i>AVERAGE POWER.....</i>	<i>24</i>
8.5. <i>POWER SPECTRAL DENSITY.....</i>	<i>25</i>
8.6. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>29</i>
9. RADIATED TEST RESULTS.....	36
9.1. <i>LIMITS AND PROCEDURE.....</i>	<i>36</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>37</i>
9.3. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>50</i>
10. AC POWER LINE CONDUCTED EMISSIONS	53
11. SETUP PHOTOS	58
END OF REPORT	62

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phablet + Bluetooth, DTS/UNII a/b/g/n, ANT+ & NFC
MODEL: SM-G7508Q
SERIAL NUMBER: FL-244-D (Conducted), FL-244-B (Radiated)
DATE TESTED: JUNE 30 – JULY 11, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
LAB ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phablet + Bluetooth, DTS/UNII a/b/g/n, ANT+ & NFC.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402-2480	BLE	3.68	2.33

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of 0.14 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G7508Q	N/A	N/A
Earphone	Samsung	SM-G7508Q	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BLE communications.

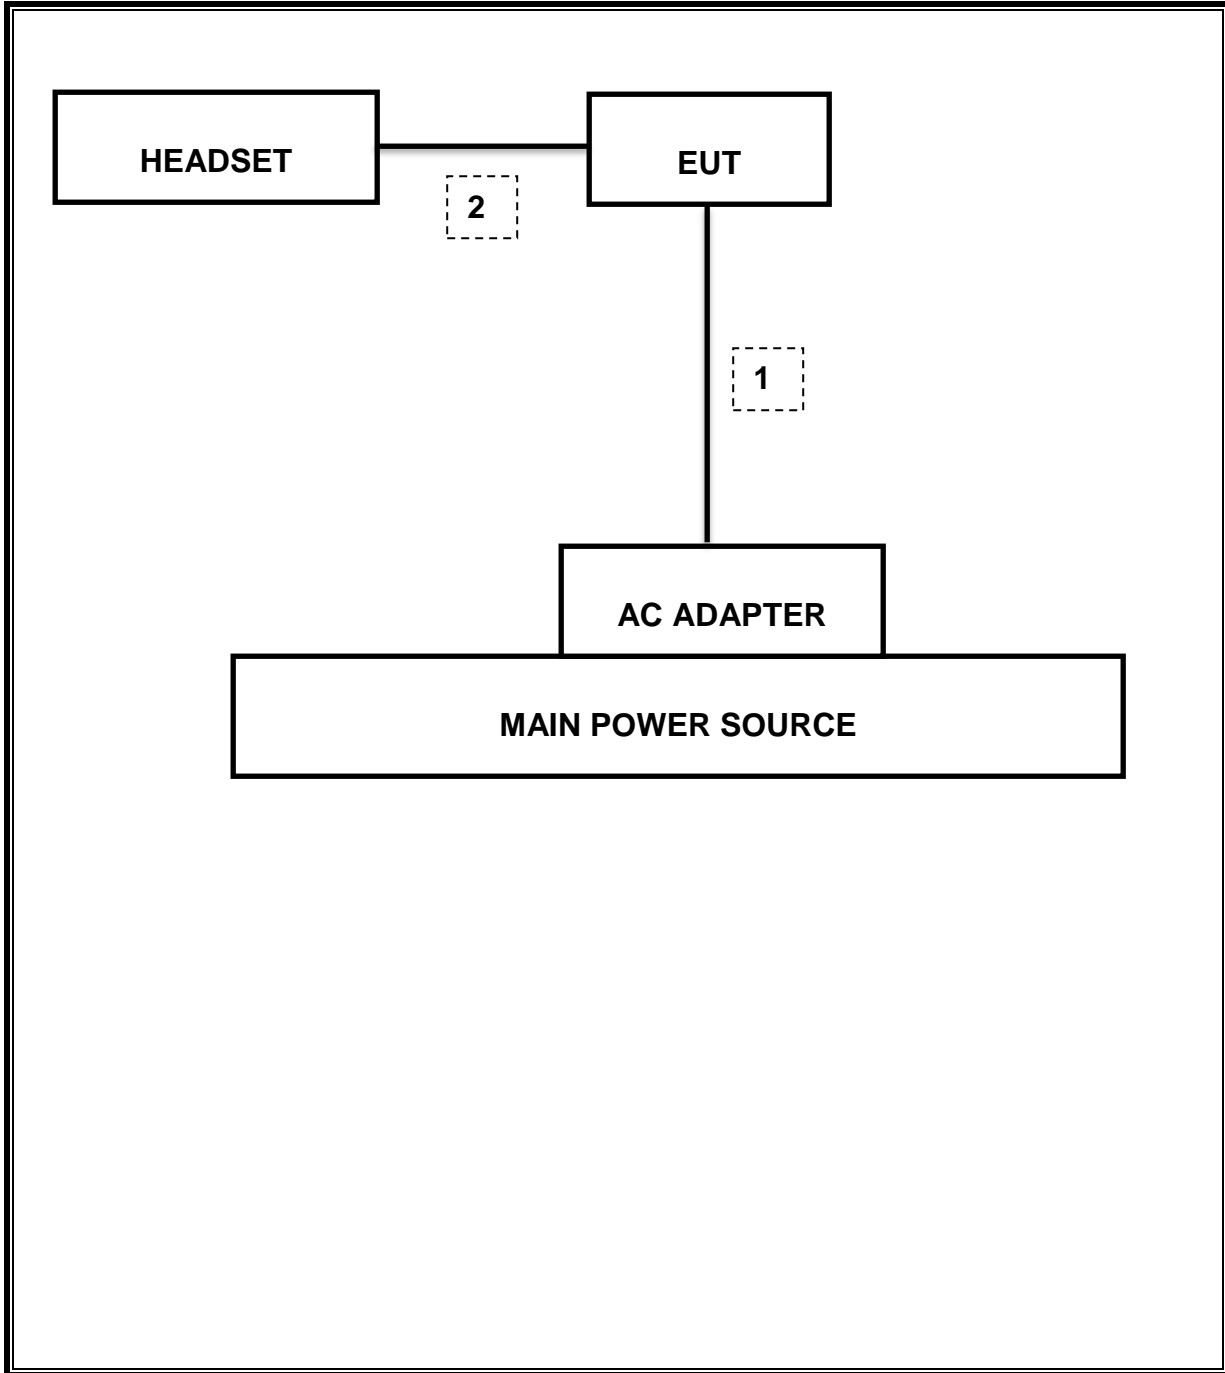

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 G	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 25.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sens	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR

7. SUMMARY

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
15.247 (a)(2)	RSS-210 A8.2(a)	Occupied Band width (6dB)	>500KHz	Conducted	Pass	0.66 MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-31.12 dBm
15.247	RSS-210 A8.4	TX conducted output power	<30dBm		Pass	3.68 dBm
15.247	RSS-210 A8.2	PSD	<8dBm		Pass	-11.68 dBm
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10	Radiated	Pass	36.7dBuV
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m		Pass	41.04dBuV/m

8. ANTENNA PORT TEST RESULTS

8.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.66	0.5
Middle	2440	0.66	0.5
High	2480	0.68	0.5

6 dB BANDWIDTH PLOTS


LOW CHANNEL

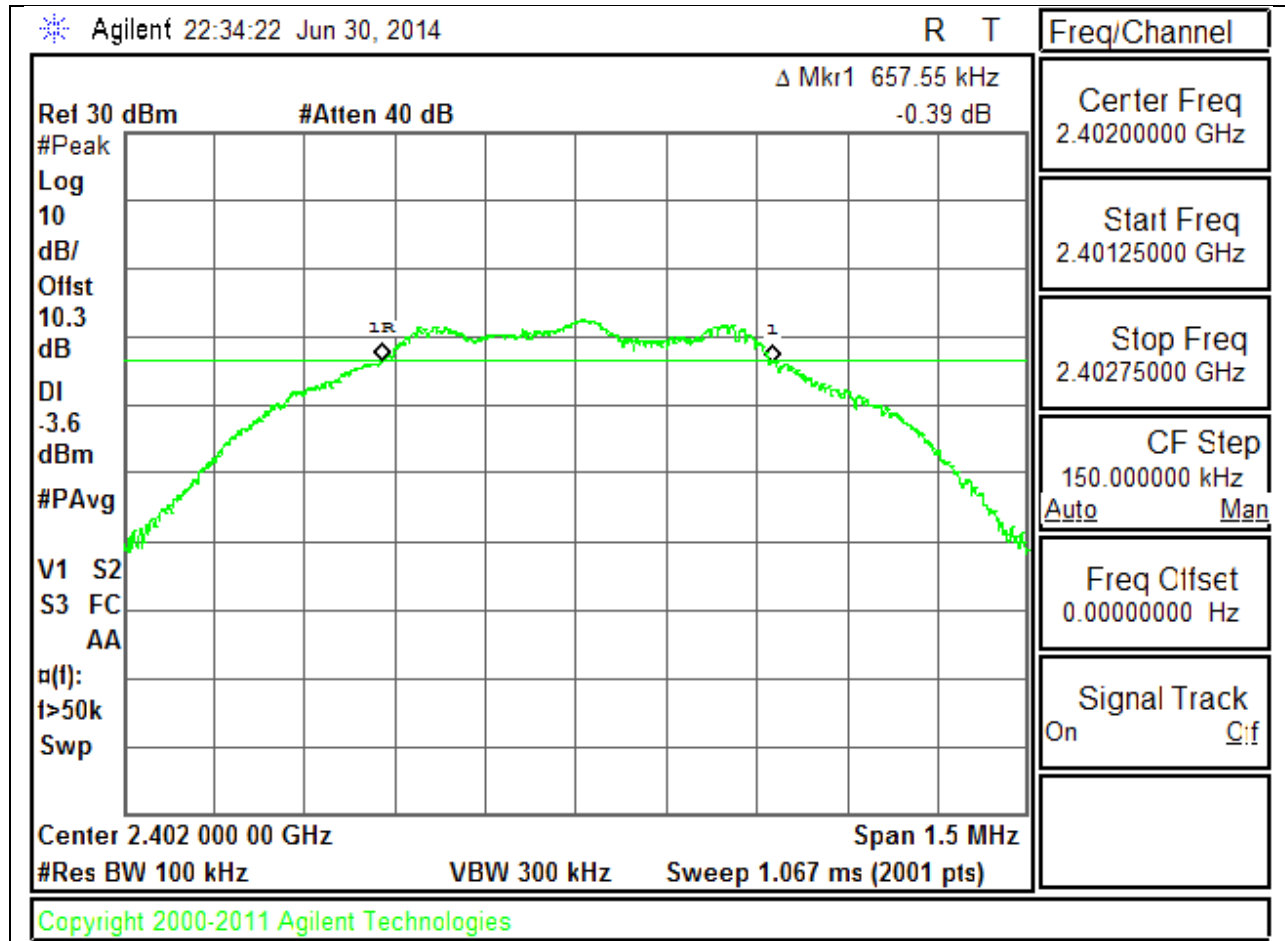

MID CHANNEL

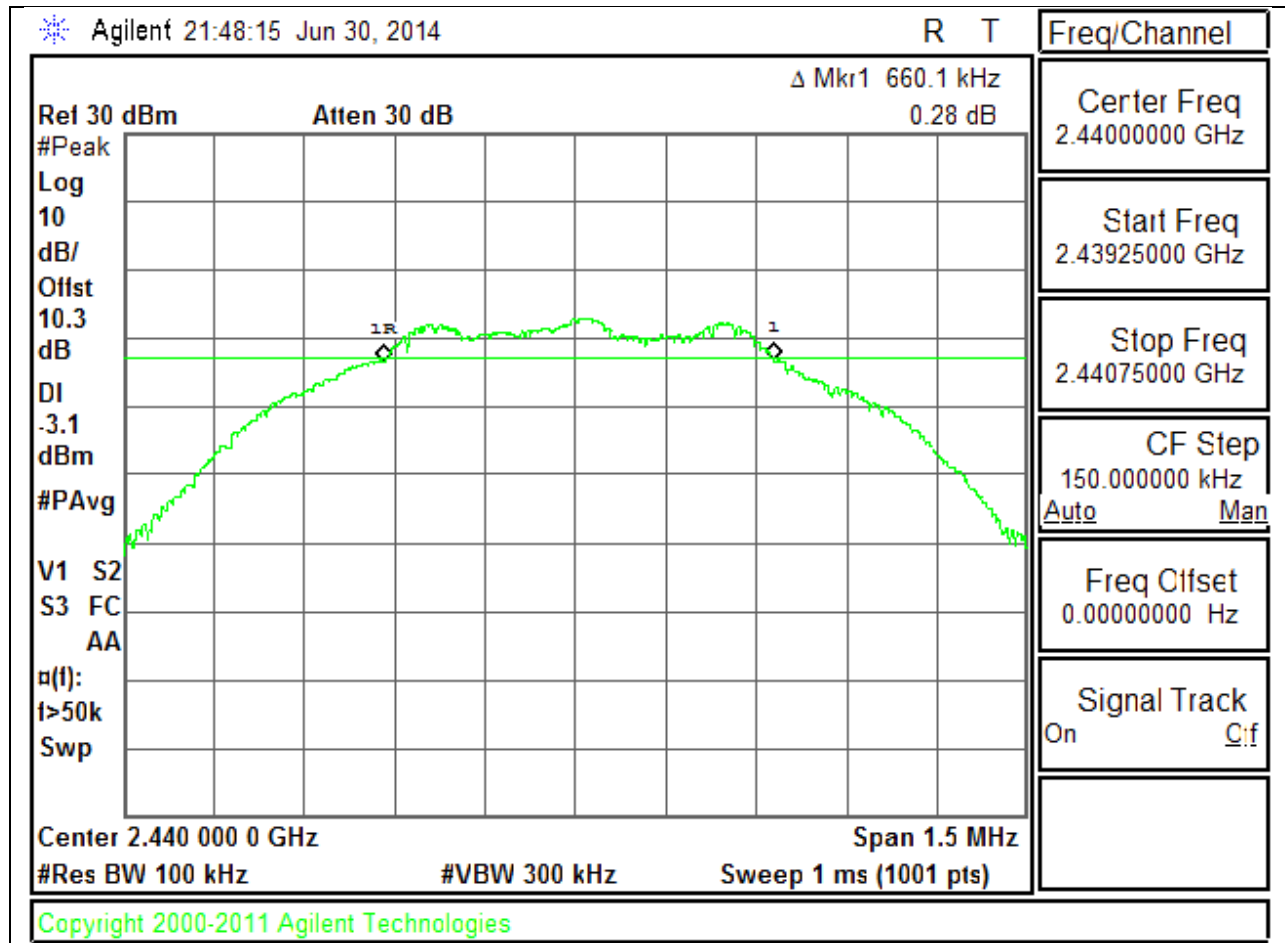

HIGH CHANNEL

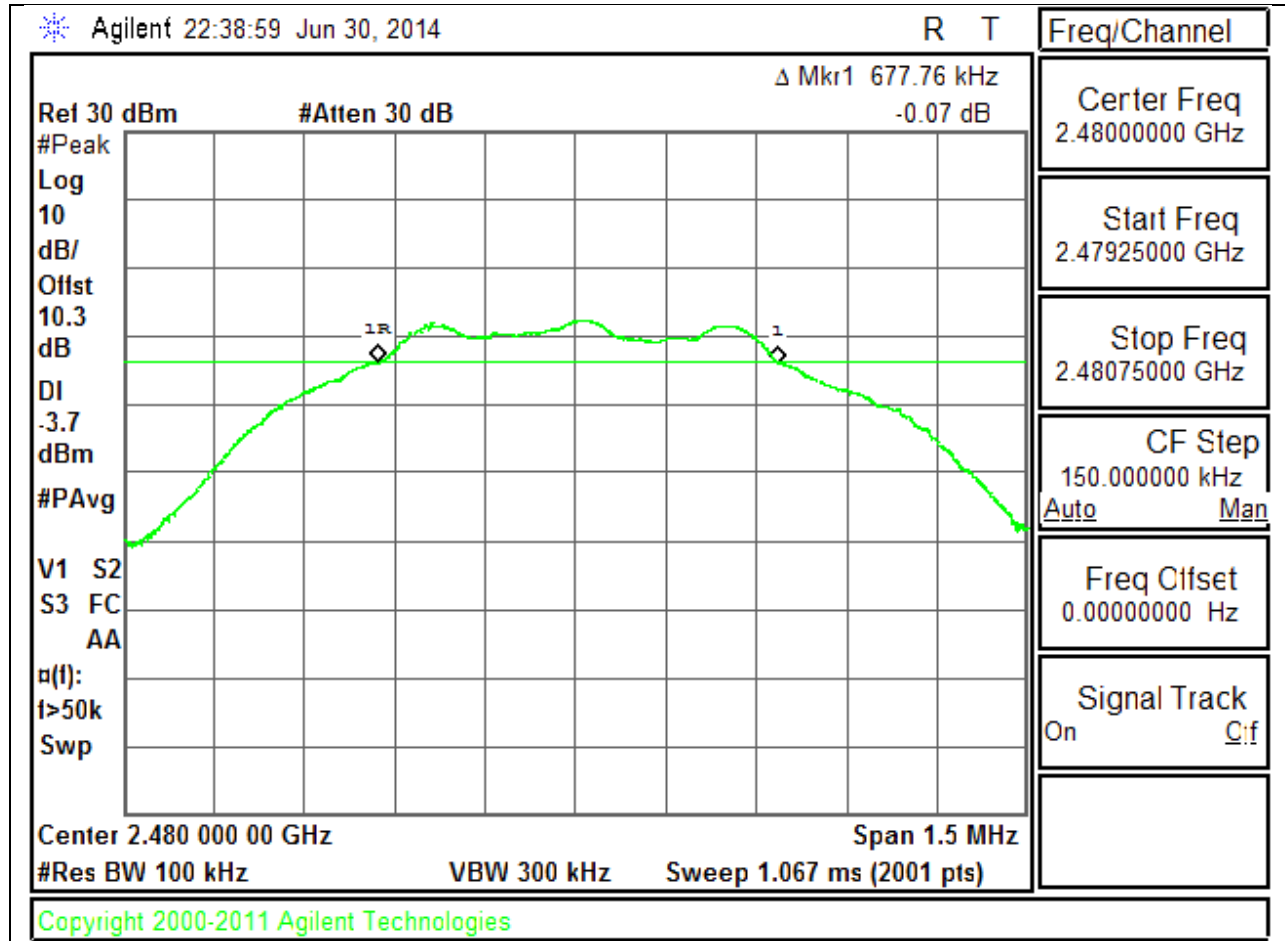

8.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE


Reference to KDB558074 D01 DTS Meas Guidance v03r01: The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0679
Middle	2440	1.0732
High	2480	1.0721

99% BANDWIDTH PLOTS

LOW CHANNEL

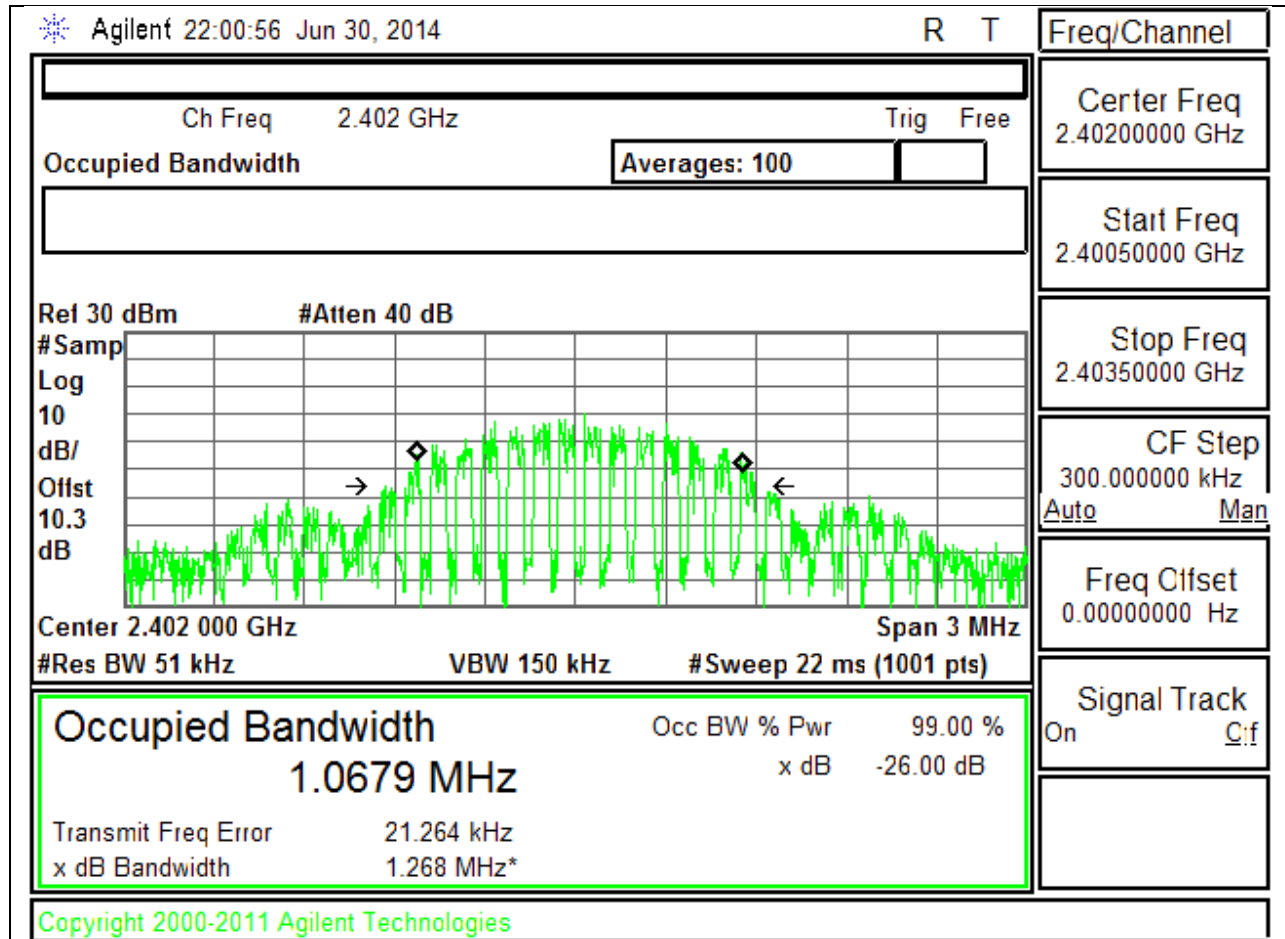

MID CHANNEL

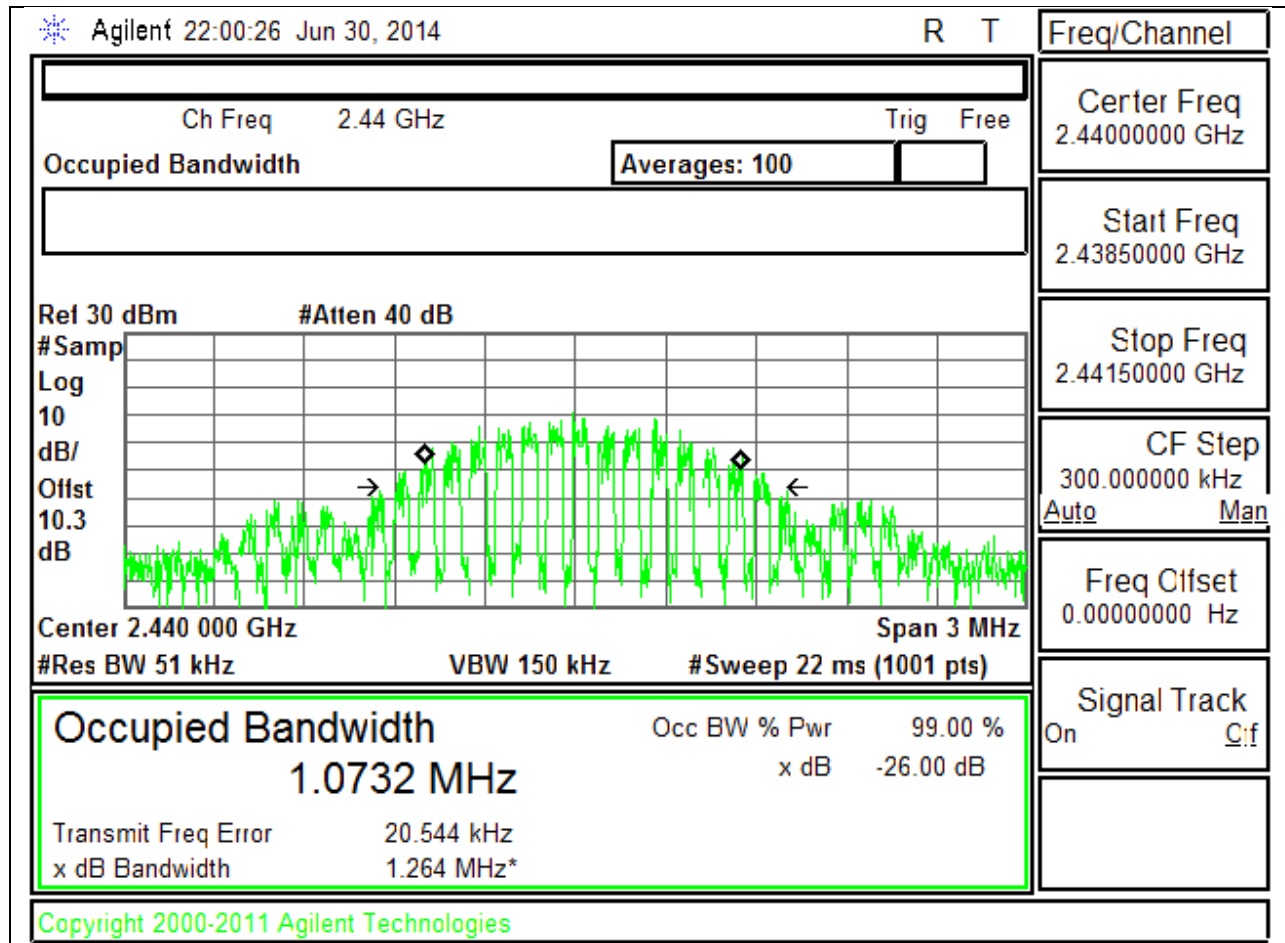

HIGH CHANNEL

Agilent 21:58:03 Jun 30, 2014		R T	Freq/Channel
Ch Freq 2.48 GHz		Center Freq 2.48000000 GHz	
Occupied Bandwidth		Start Freq 2.47850000 GHz	
Averages: 100		Stop Freq 2.48150000 GHz	
Ref 30 dBm #Atten 40 dB		CF Step 300.000000 kHz <small>Auto Man</small>	
#Samp Log 10 dB/ Offst 10.3 dB		Freq Offset 0.00000000 Hz	
		Signal Track On Cif	
Center 2.480 000 GHz Span 3 MHz #Res BW 51 kHz VBW 150 kHz #Sweep 22 ms (1001 pts)		Occupied Bandwidth 1.0721 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB	
Transmit Freq Error 18.726 kHz x dB Bandwidth 1.270 MHz*			
Copyright 2000-2011 Agilent Technologies			

8.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


Peak power is measured using KDB558074 D01 DTS Meas Guidance v03r01 April 9, 2013 under section 9.1.1 utilizing spectrum analyzer.

RESULTS


Channel	Frequency (MHz)	Peak Power Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2402	3.190	30	-26.810
Middle	2440	3.680	30	-26.320
High	2480	3.060	30	-26.940

OUTPUT POWER PLOTS


LOW CHANNEL

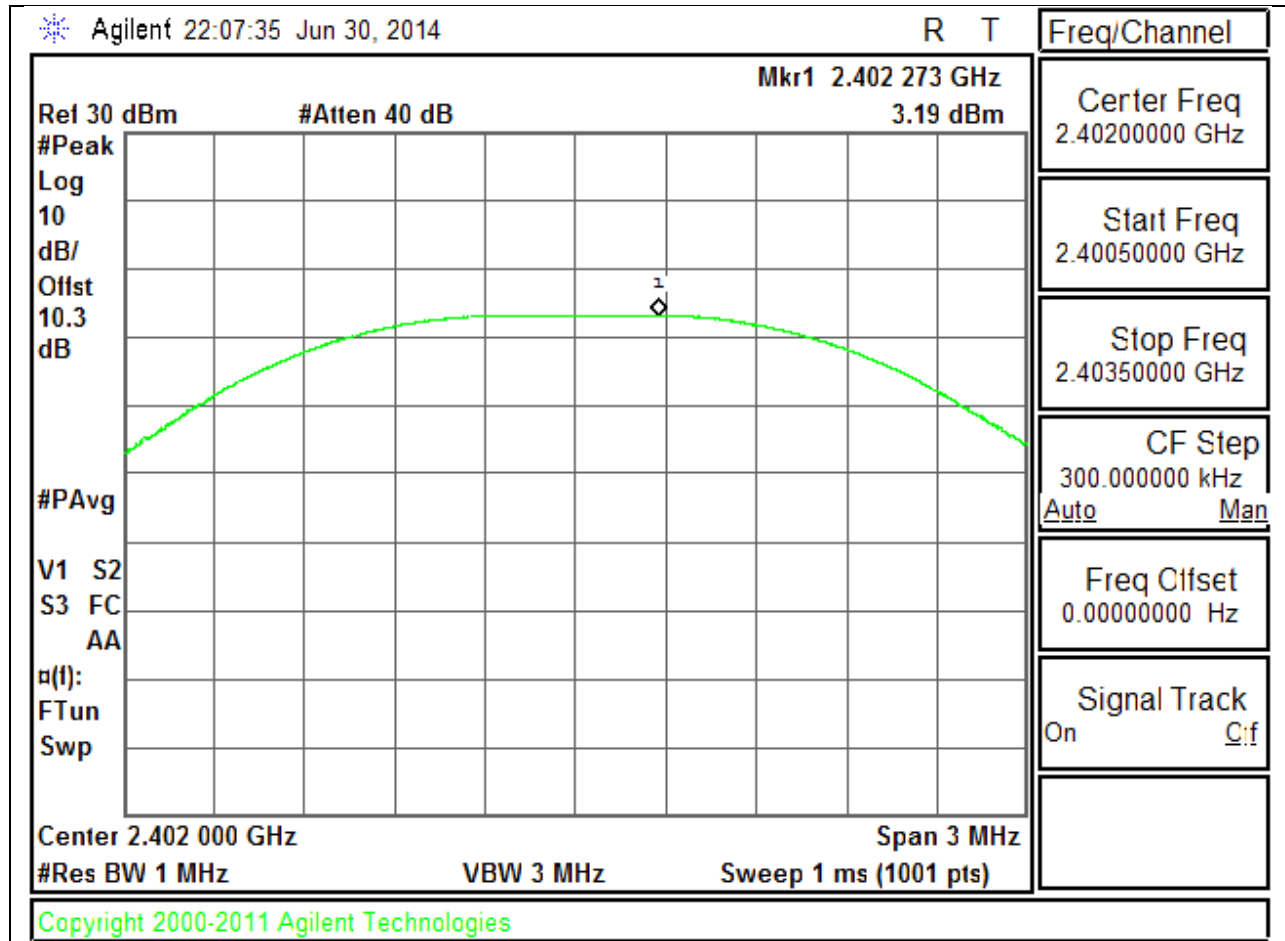

MID CHANNEL

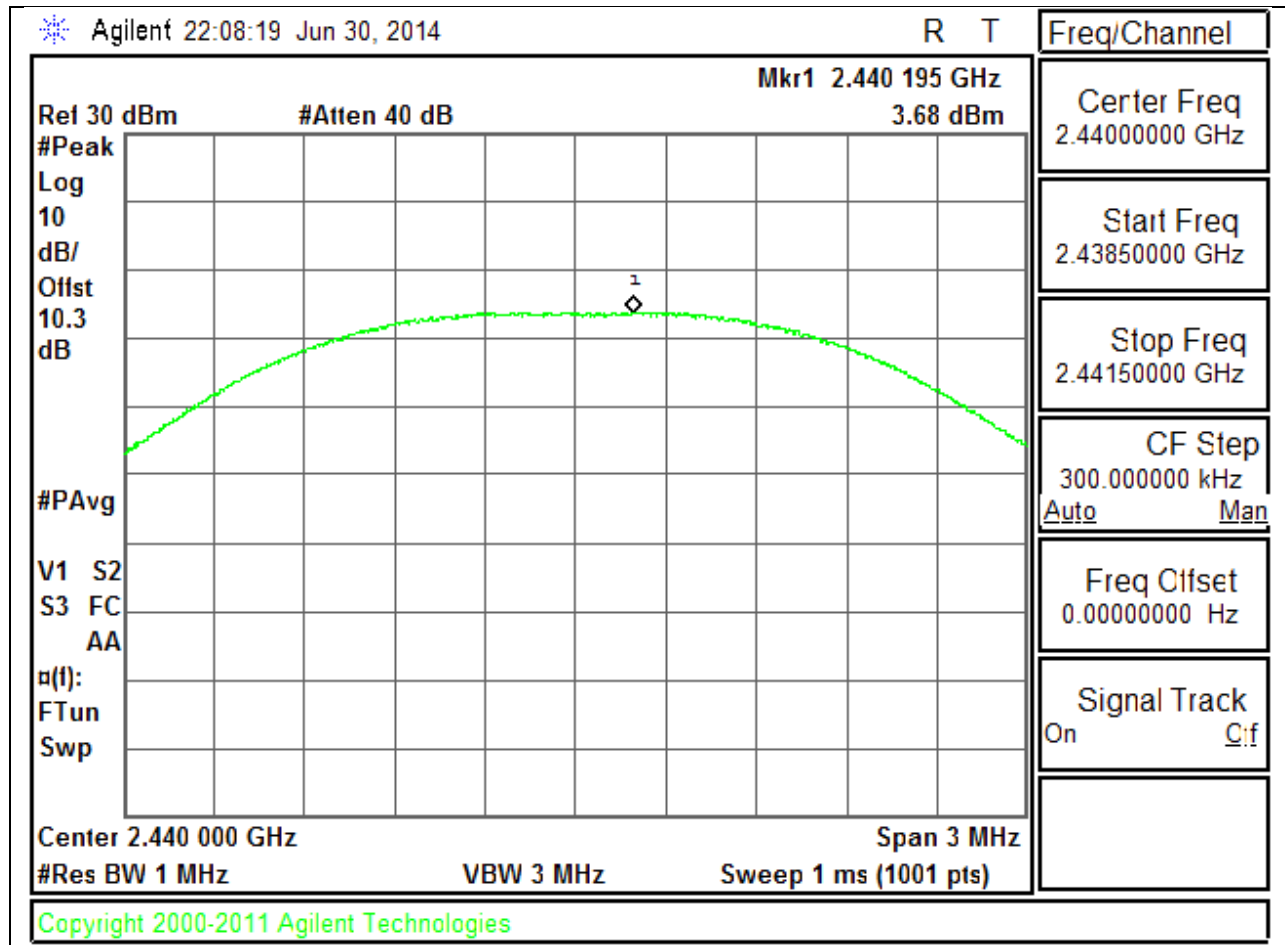

HIGH CHANNEL

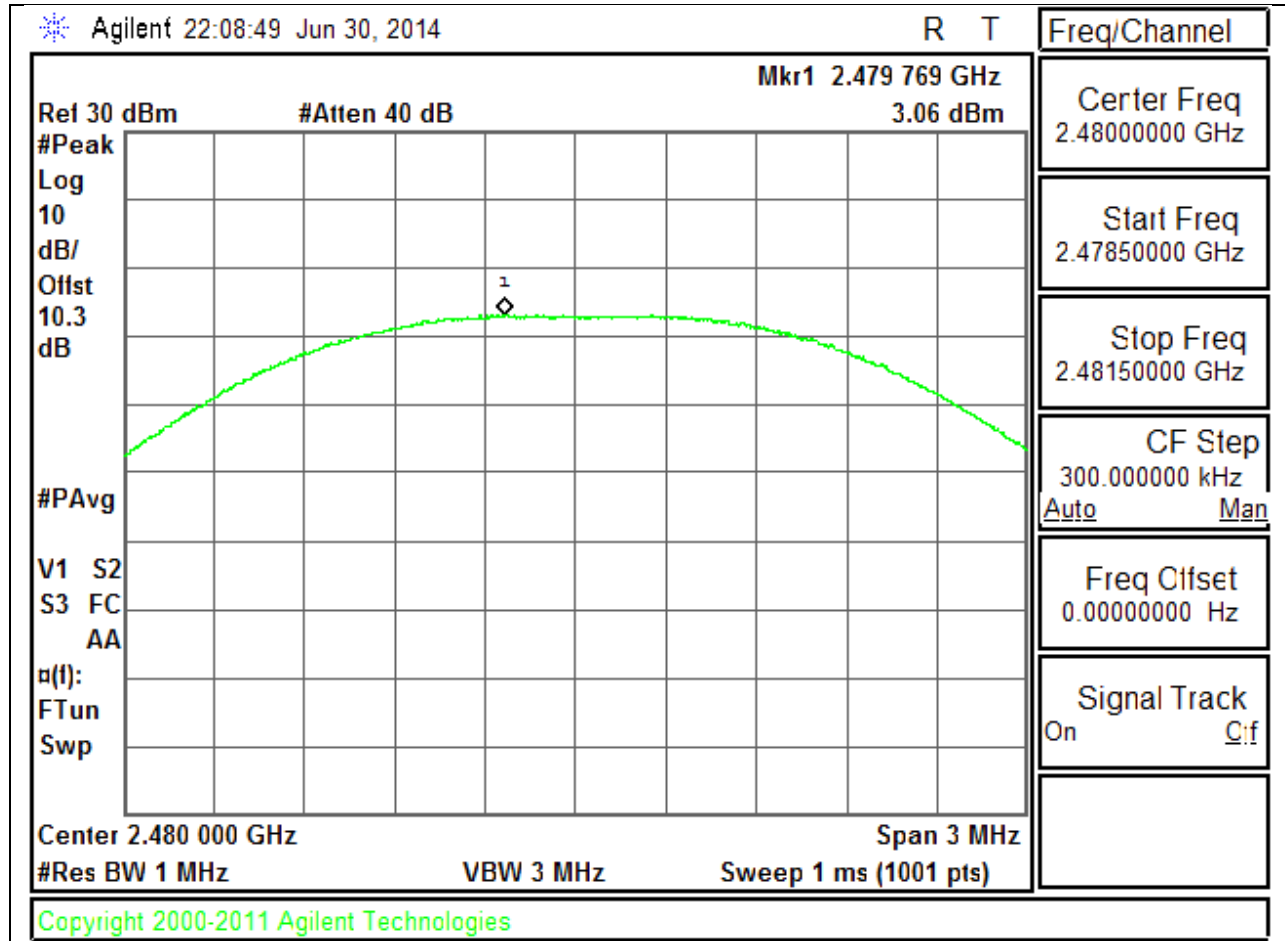

8.4. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

The cable assembly insertion loss of 11 dB (including 10 dB pad and 1 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	AV power (dBm)
Low	2402	2.2
Middle	2440	2.7
High	2480	2

8.5. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE


Power Spectral Density was performed utilizing the "Method PKPSD (Peak PSD)" under KDB558074 D01 DTS Meas Guidance v03r01, April 9, 2013

RESULTS


Channel	Frequency (MHz)	PSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-12.20	8	-20.20
Middle	2440	-11.68	8	-19.68
High	2480	-12.56	8	-20.56

POWER SPECTRAL DENSITY PLOTS


LOW CHANNEL

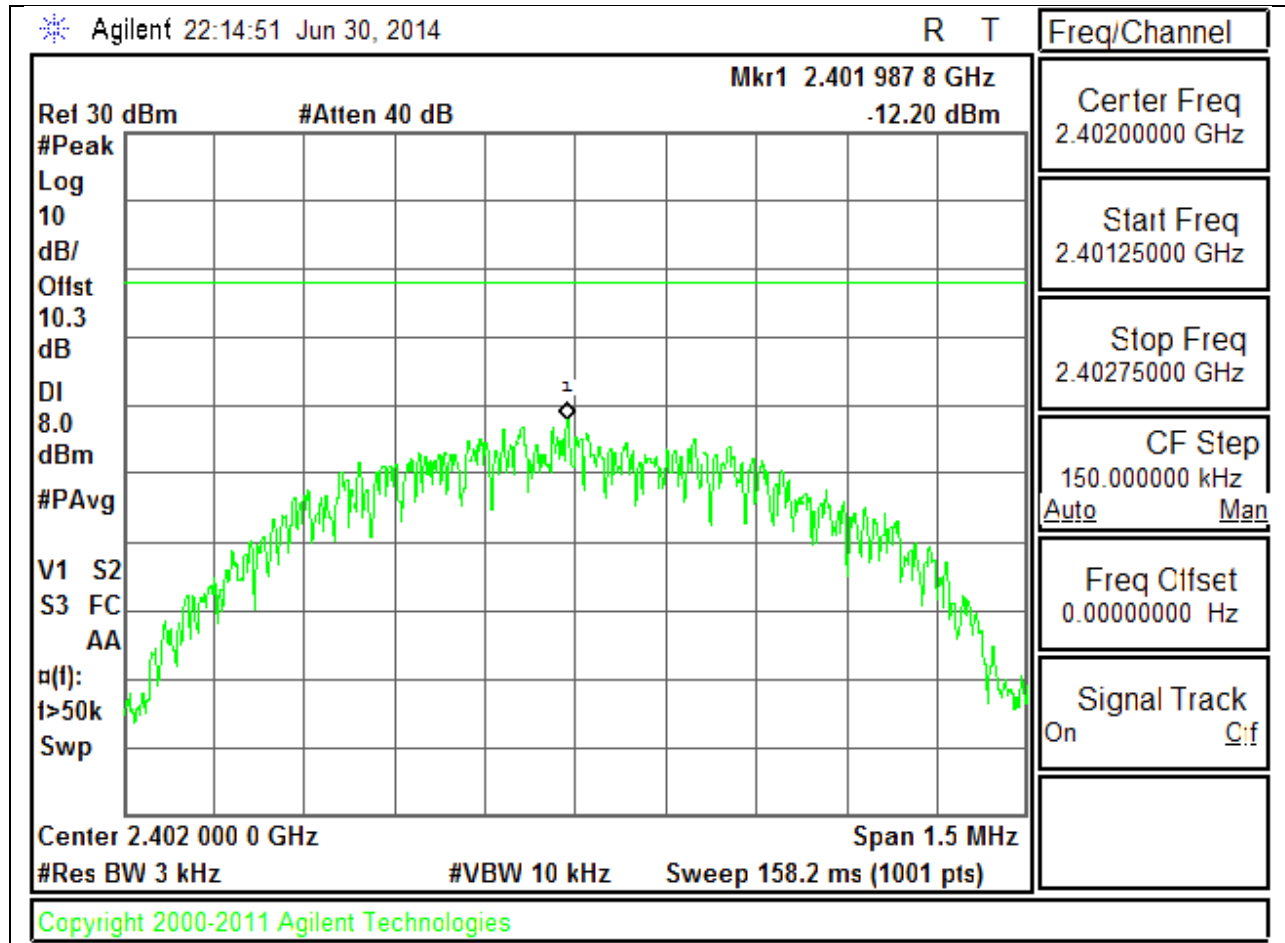

MID CHANNEL

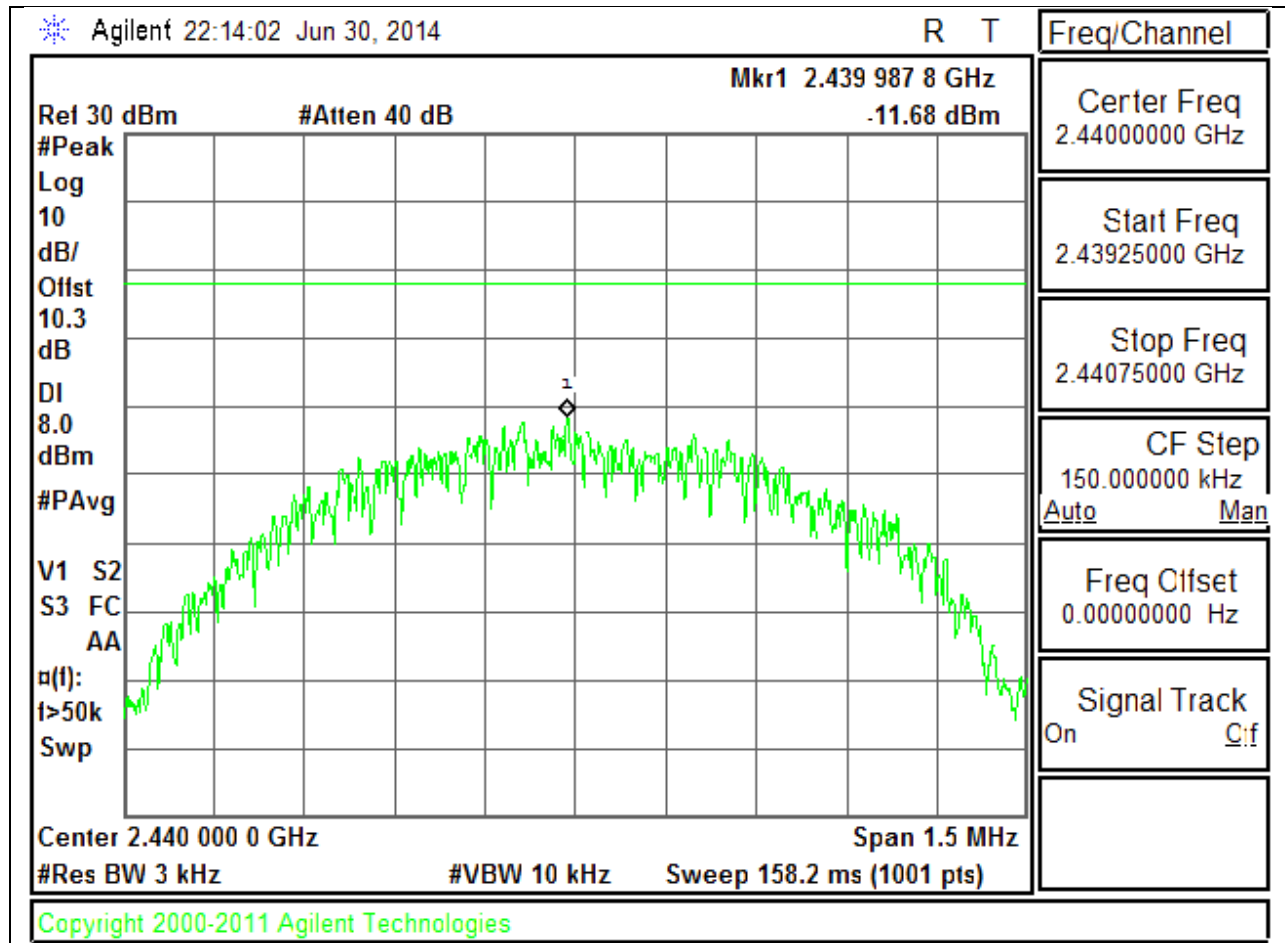

HIGH CHANNEL

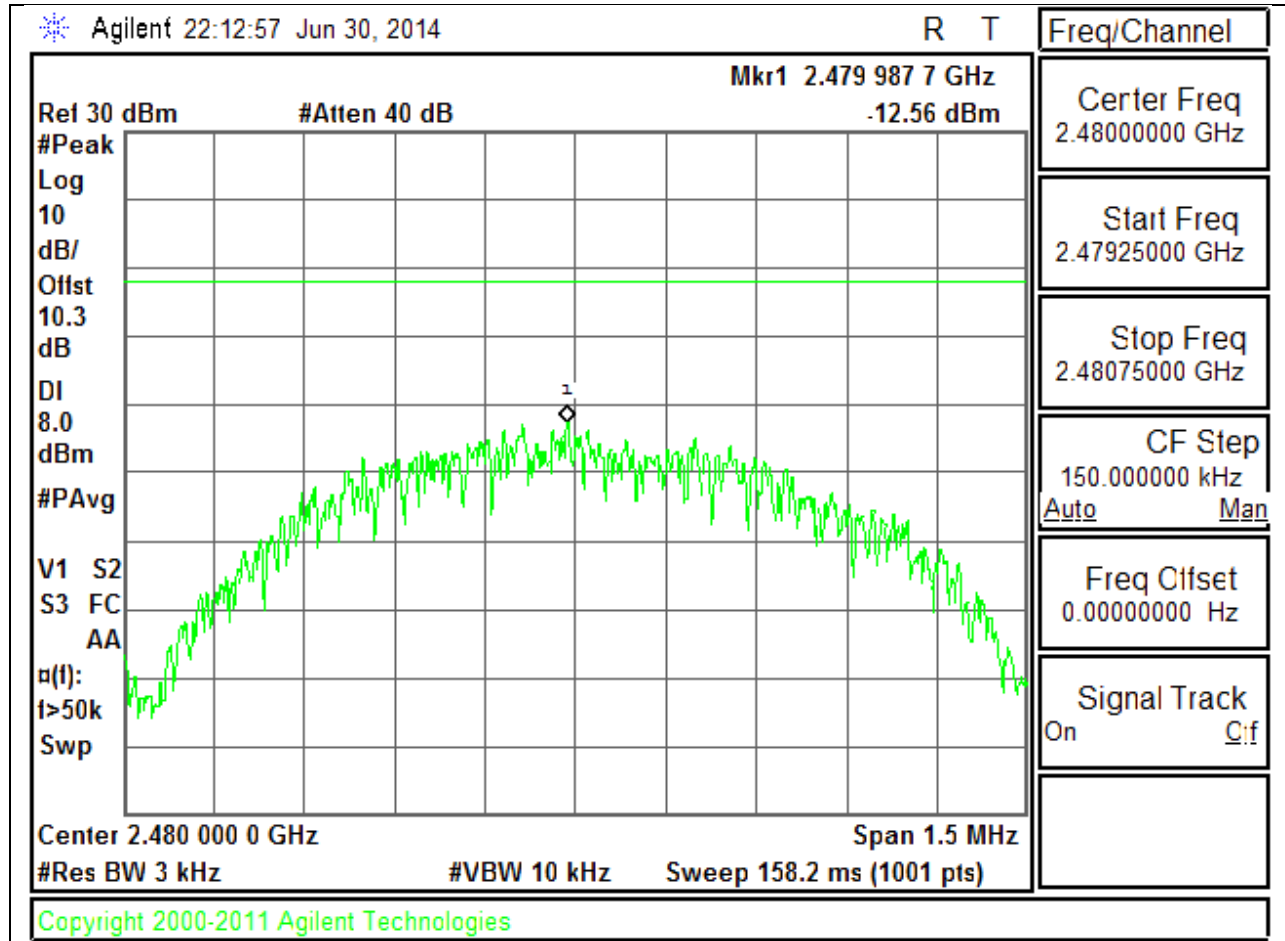

8.6. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

SPURIOUS EMISSIONS, LOW CHANNEL

LOW CHANNEL BANDEDGE

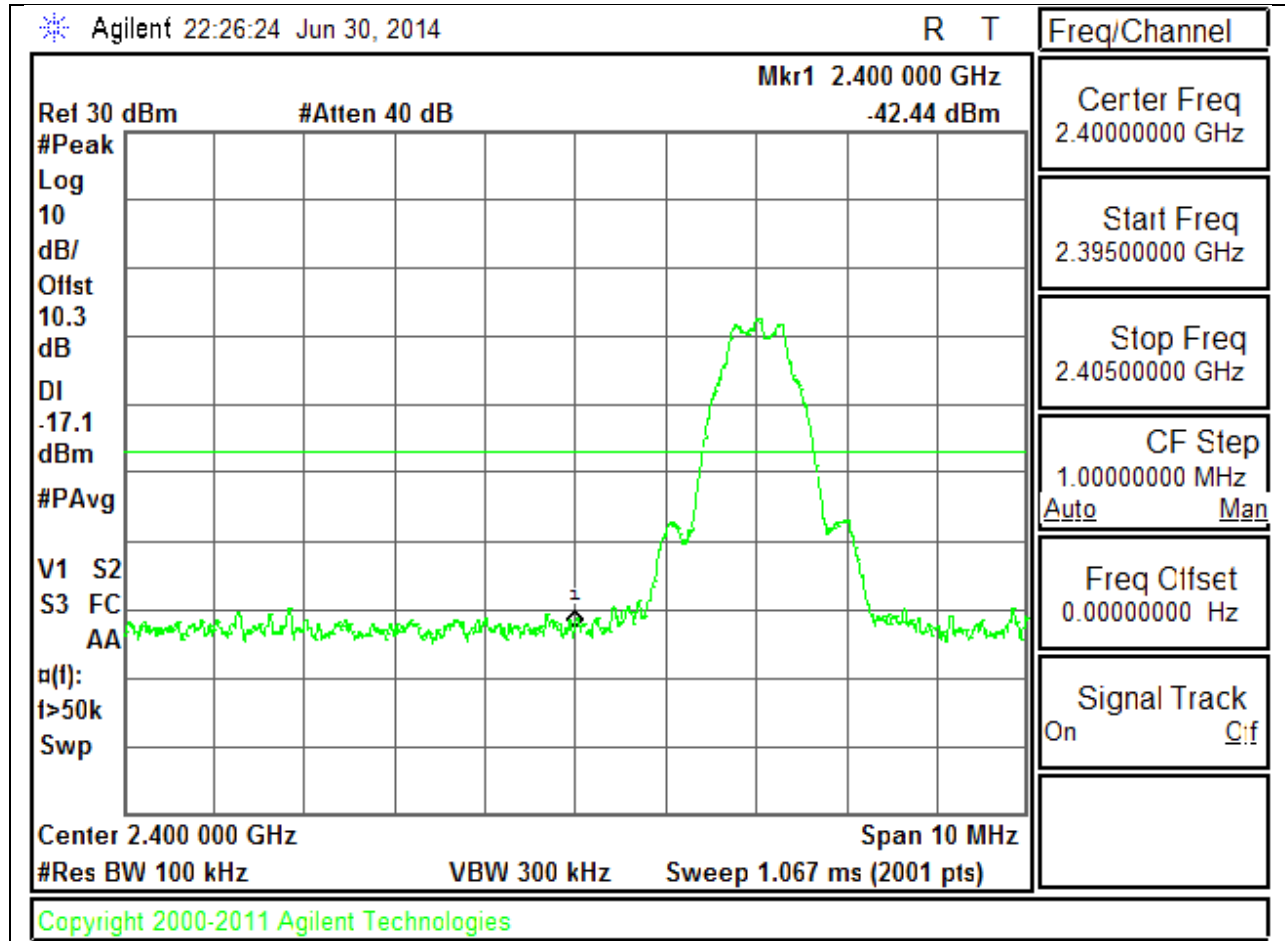


LOW CHANNEL SPURIOUS

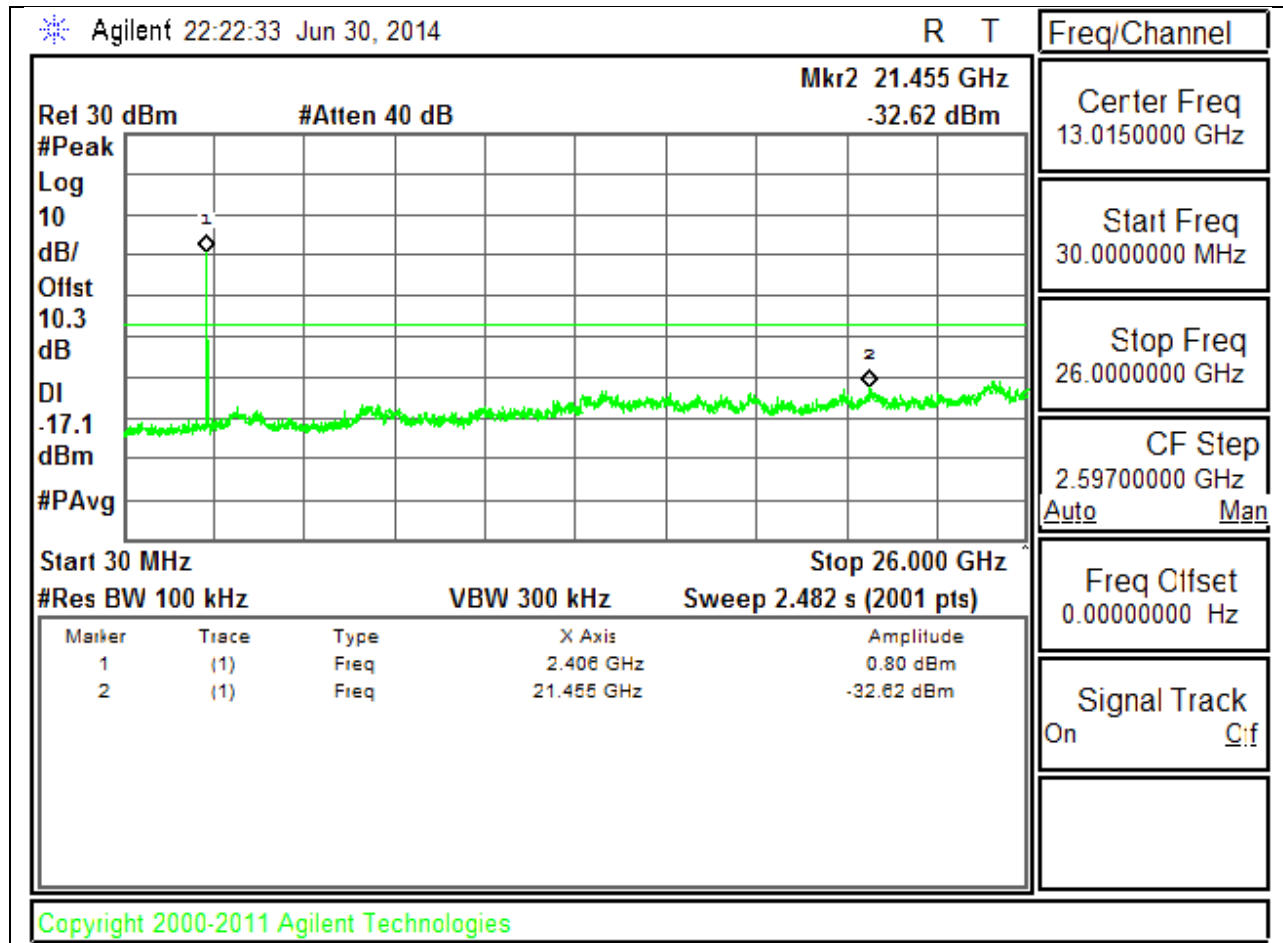


SPURIOUS EMISSIONS, MID CHANNEL

MID CHANNEL REFERENCE

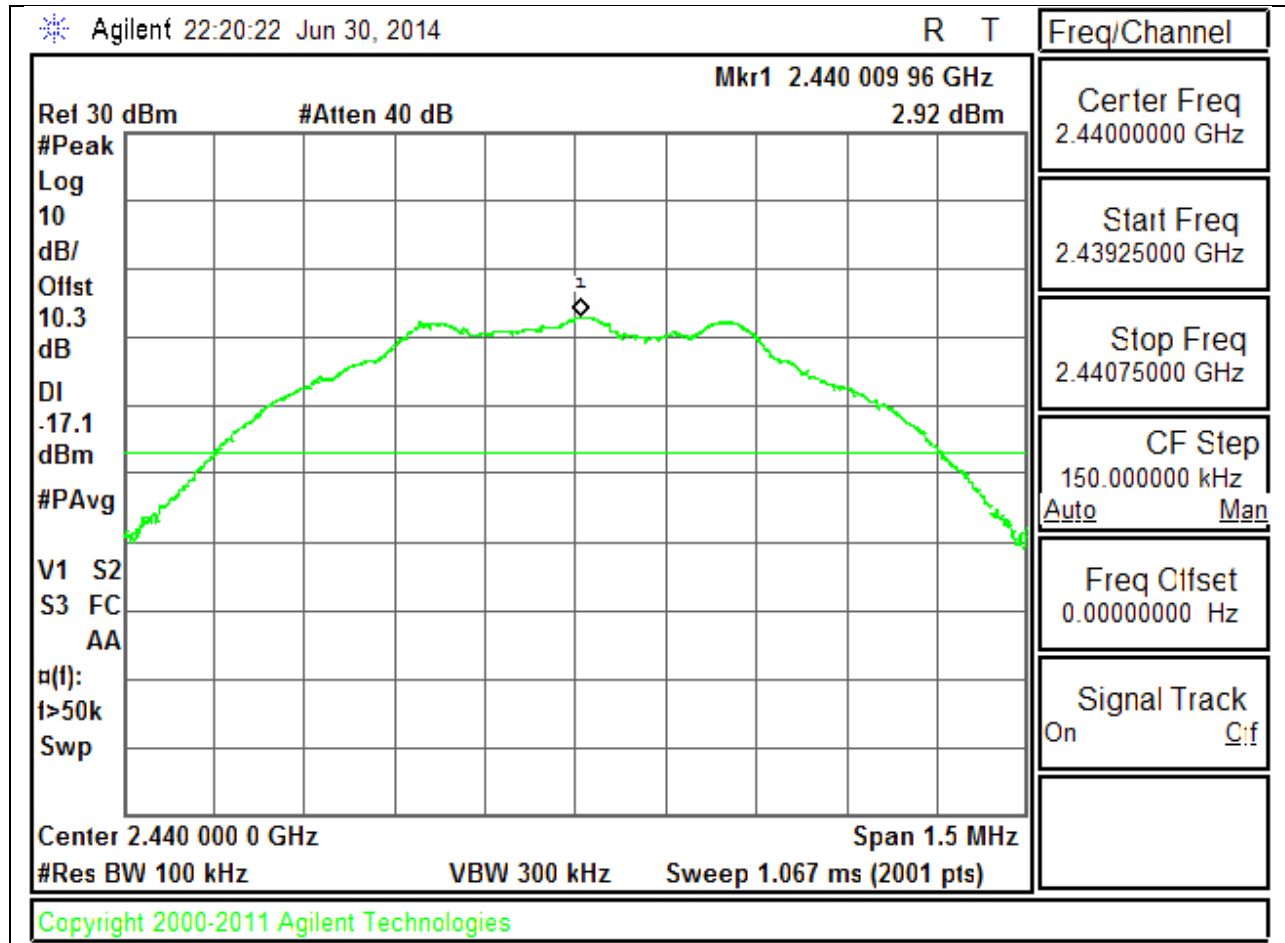


MID CHANNEL SPURIOUS

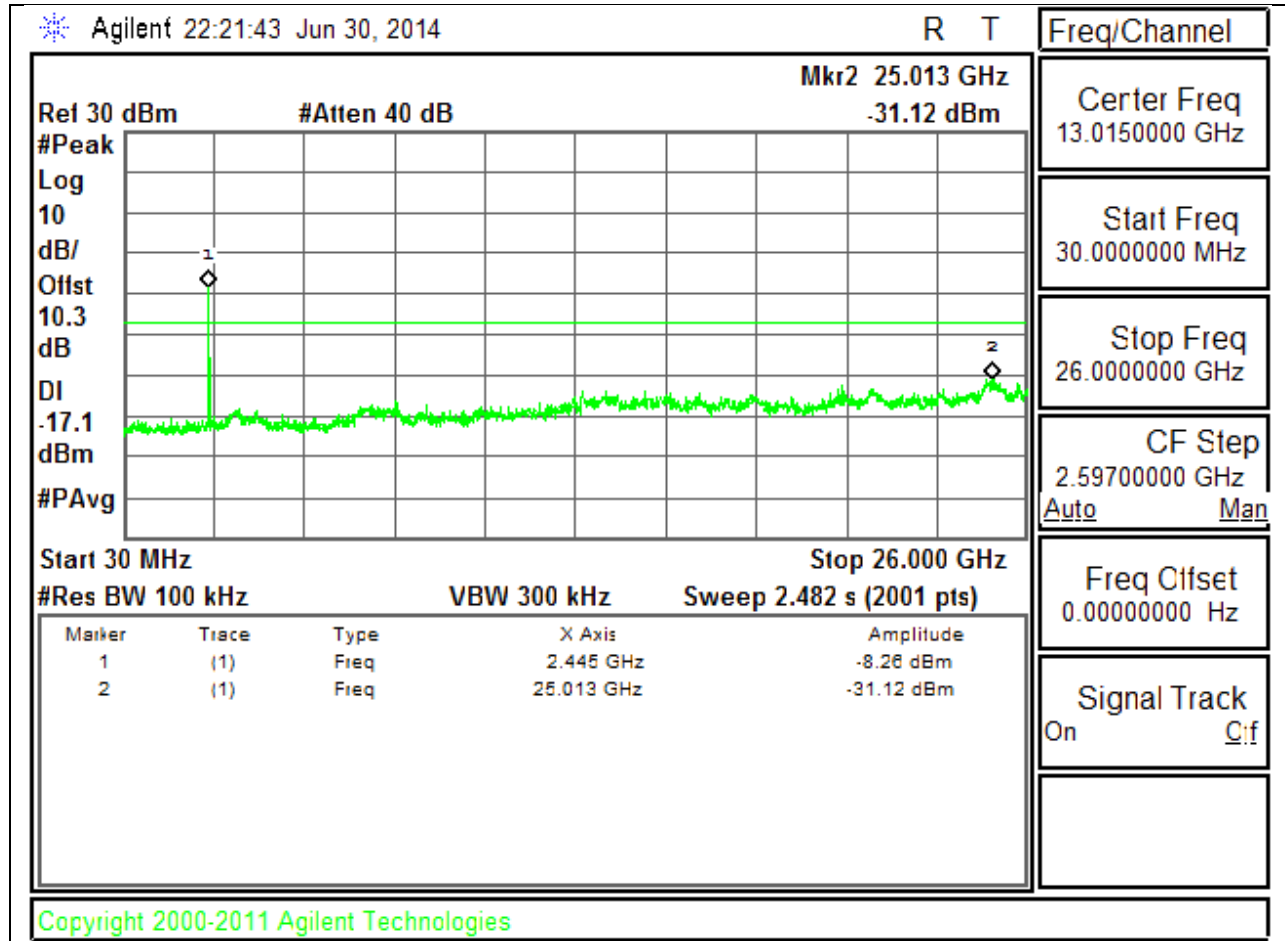


SPURIOUS EMISSIONS, HIGH CHANNEL

HIGH CHANNEL BANDEDGE

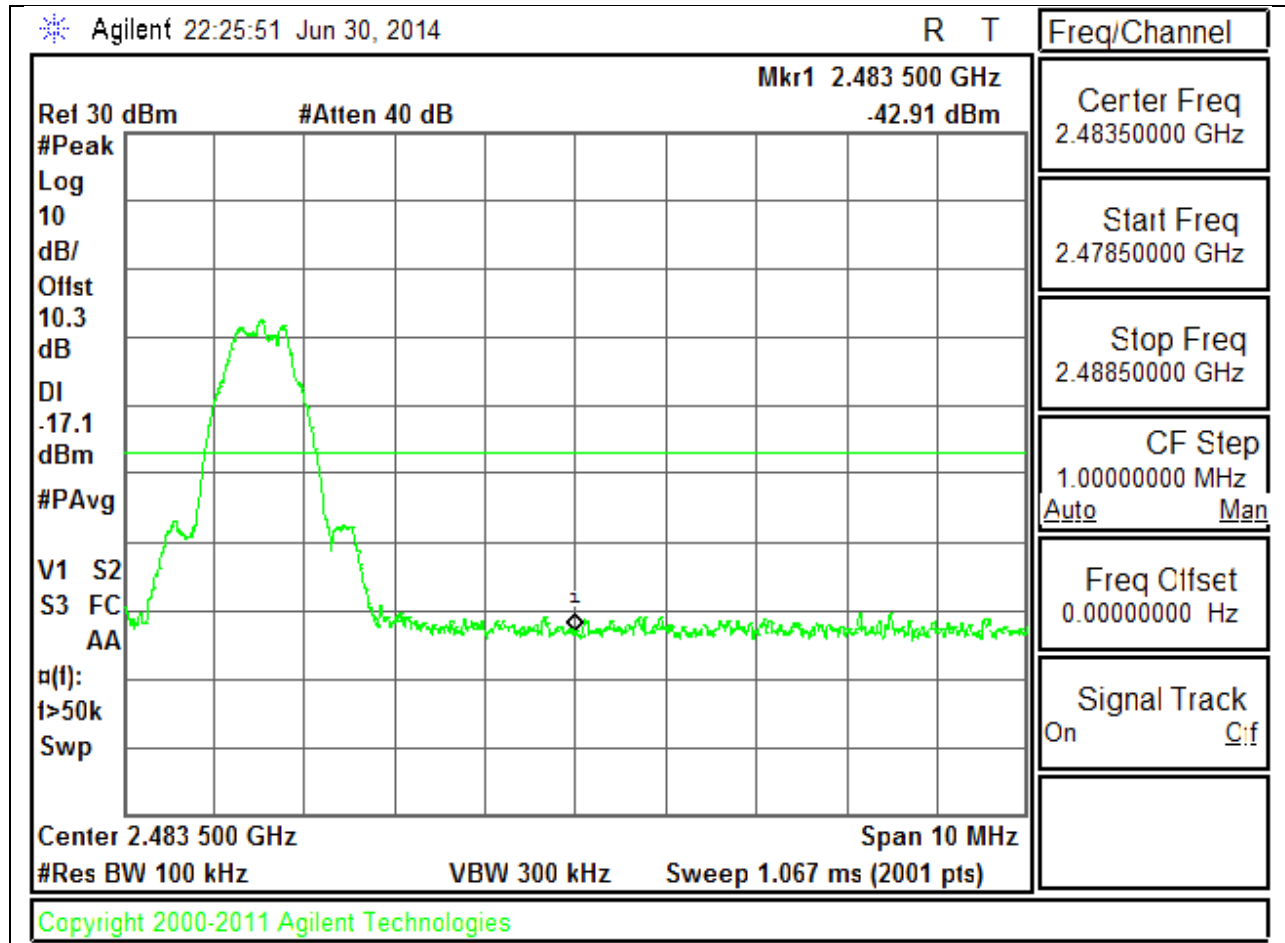

HIGH CHANNEL SPURIOUS

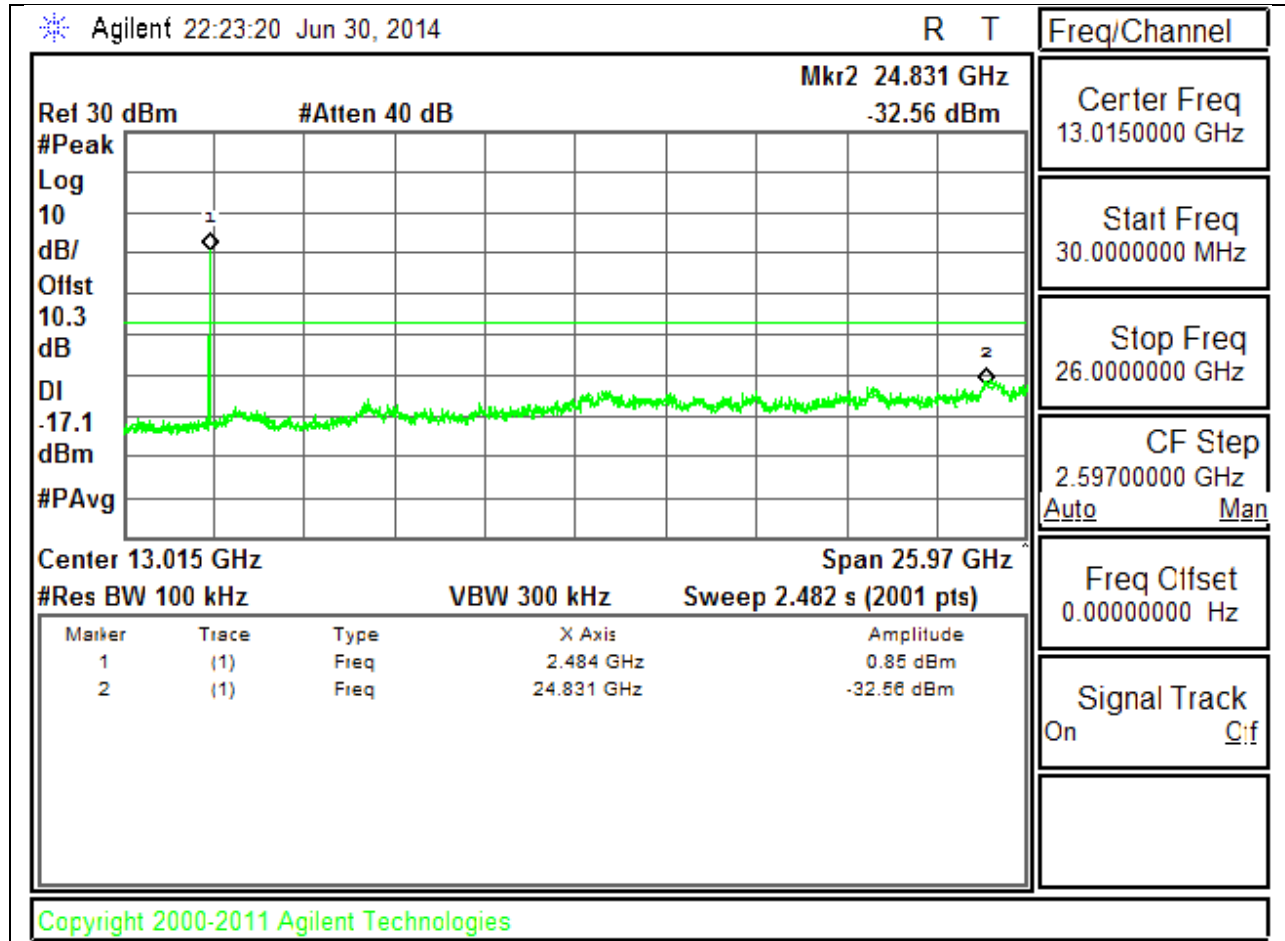

9. RADIATED TEST RESULTS

9.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4 - 2009. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and add duty cycle factor for average measurements. Duty cycle factor = $10 \log(1/x)$. For this sample: DCF = $10 \log(1/0.618) = 2.08 \text{ dB}$ (Spectrum Analyzer round it up to 2.1 dB)

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

9.2. TRANSMITTER ABOVE 1 GHz

RESTRICTED BANDEDGE (LOW CHANNEL)

LOW CHANNEL RESTRICTED, HORIZONTAL

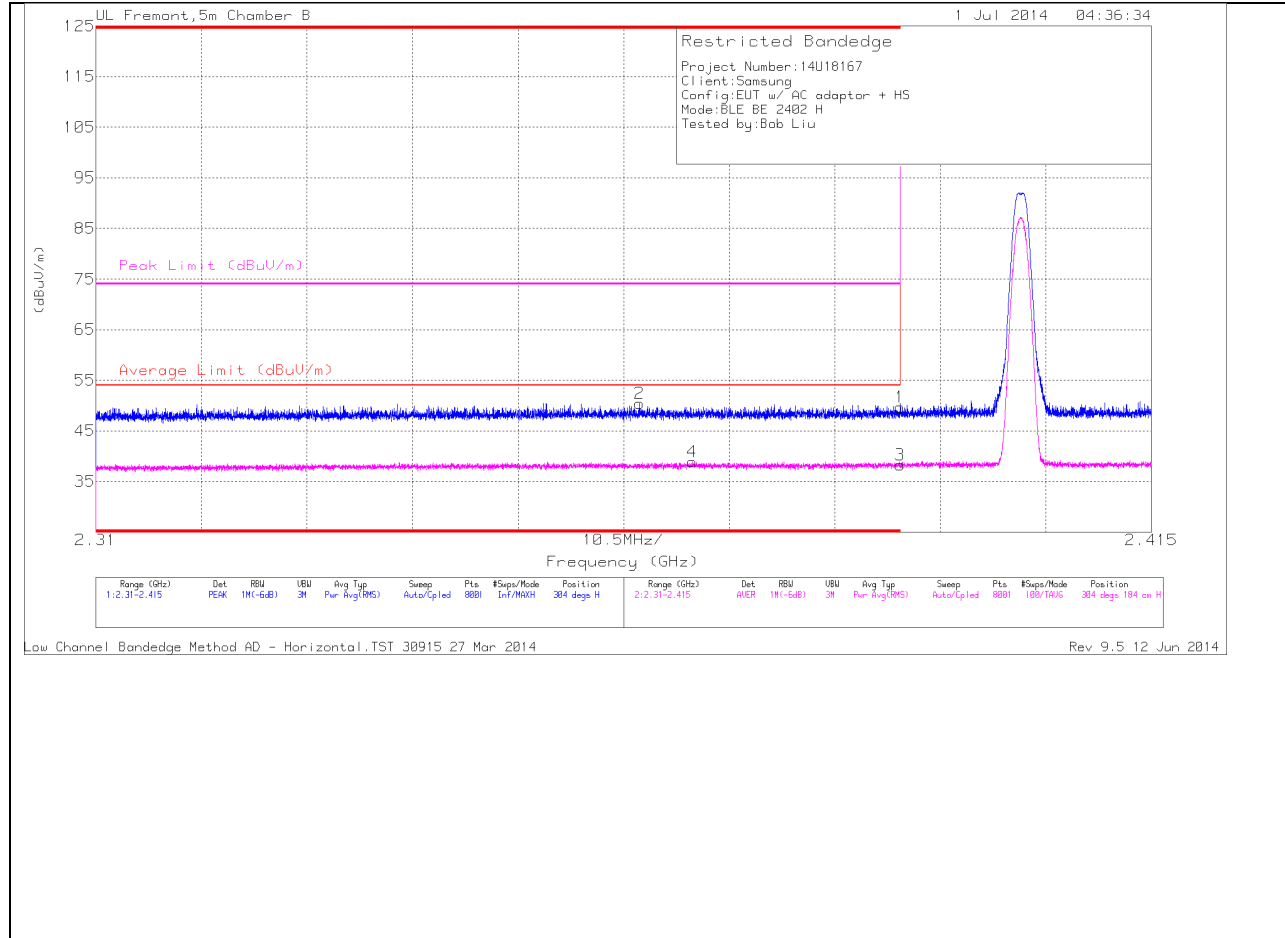


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Ftr/Pad (dB)	DC factor	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	40.38	PK	32.1	-22.8		49.68	-	-	74	-24.32	304	184	H
2	* 2.364	41.25	PK	32	-22.8		50.45	-	-	74	-23.55	304	184	H
3	* 2.39	28.9	RMS	32.1	-22.8	2.1	38.2	54	-15.8	-	-	304	184	H
4	* 2.369	29.71	RMS	32	-22.8	2.1	38.91	54	-15.09	-	-	304	184	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

LOW CHANNEL RESTRICTED, VERTICAL

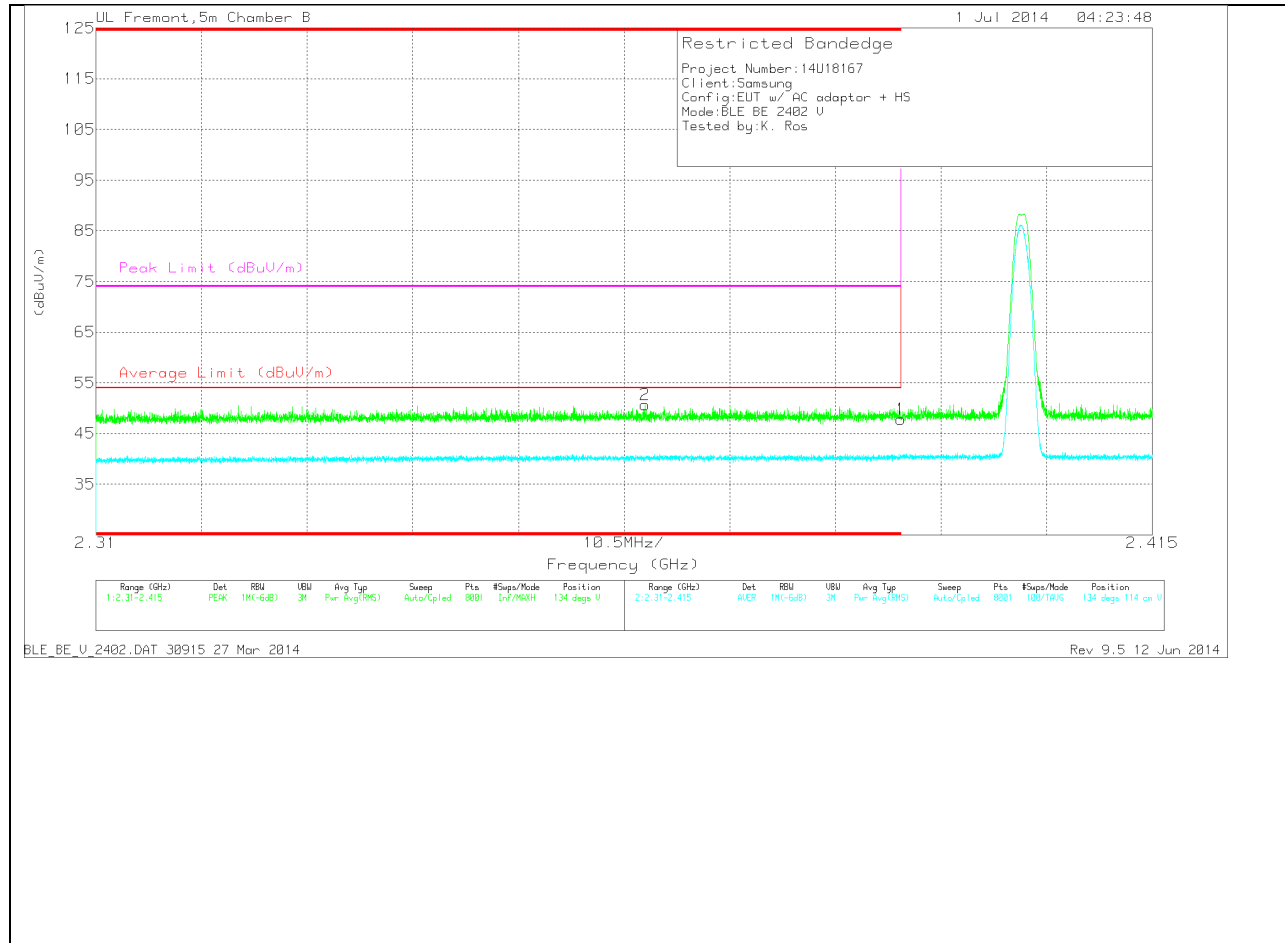


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filter/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.46	PK	32.1	-22.8	0	47.76	-	-	74	-26.24	134	114	V
2	* 2.365	41.47	PK	32	-22.8	0	50.67	-	-	74	-23.33	134	114	V
3	* 2.39	28.94	RMS	32.1	-22.8	2.1	40.34	54	-13.66	-	-	134	114	V
4	* 2.376	29.84	RMS	32	-22.9	2.1	41.04	54	-12.96	-	-	134	114	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

HIGH CHANNEL RESTRICTED, HORIZONTAL

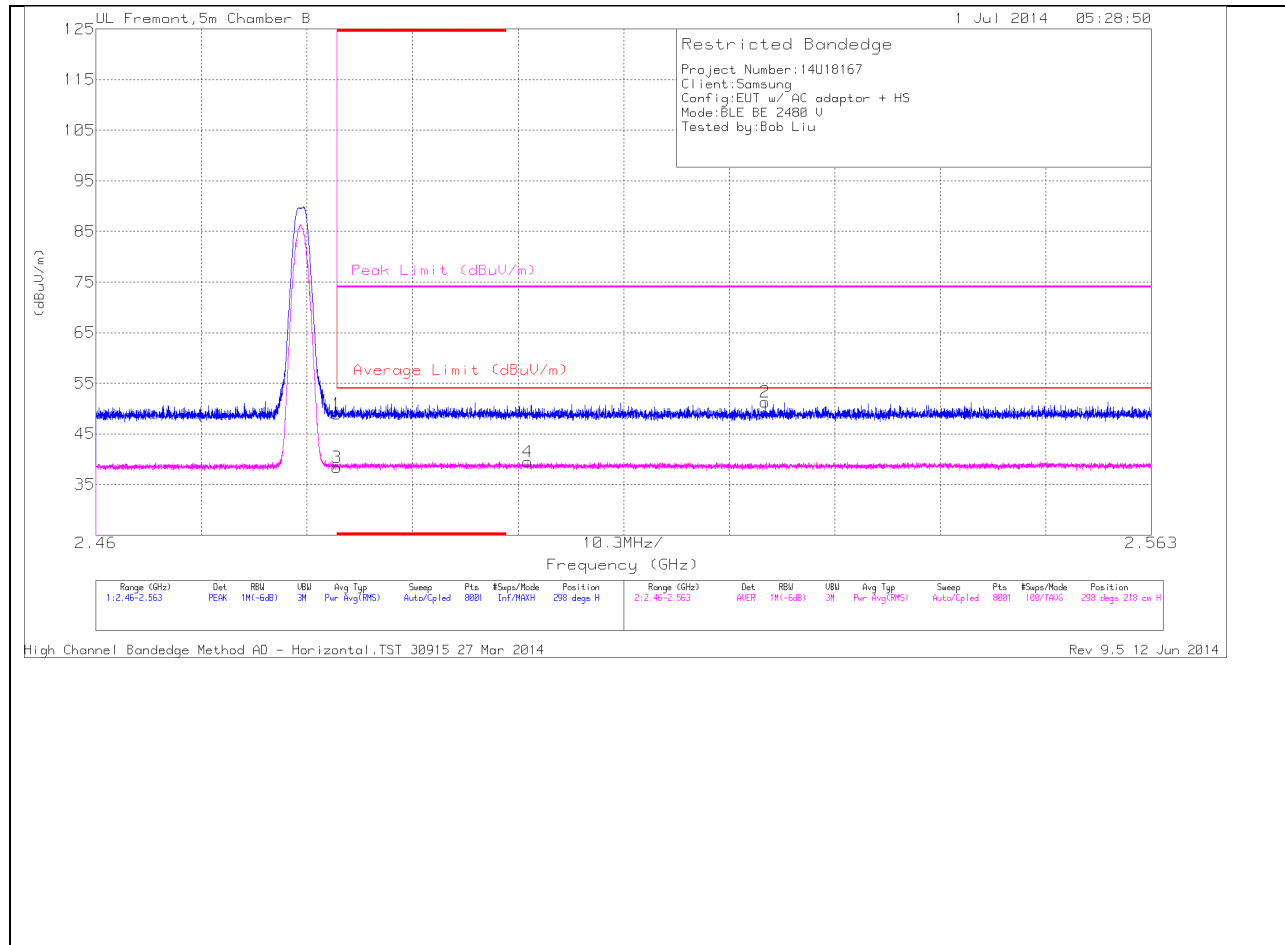


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	DC factor	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	39.28	PK	32.4	-22.7		48.98	-	-	74	-25.02	298	218	H
3	* 2.484	28.66	RMS	32.4	-22.7	2.1	38.36	54	-15.64	-	-	298	218	H
4	2.502	29.8	RMS	32.4	-22.7	2.1	39.5	54	-14.5	-	-	298	218	H
2	2.525	41.41	PK	32.5	-22.6		51.31	-	-	74	-22.69	298	218	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection

HIGH CHANNEL RESTRICTED, VERTICAL

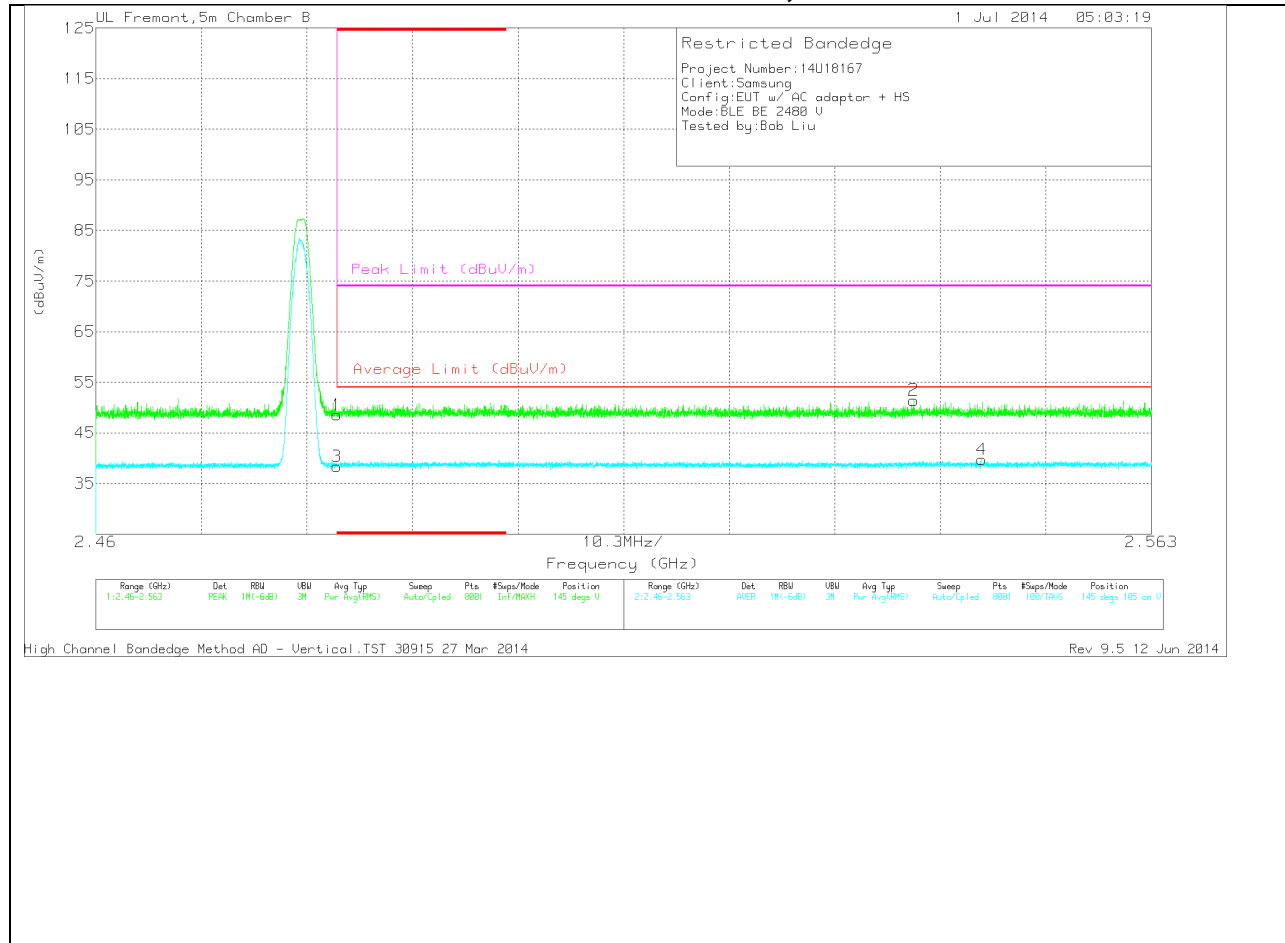

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/ Fltr/Pad (dB)	DC factor	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.89	PK	32.4	-22.7	0	48.59	-	-	74	-25.41	145	105	V
2	2.54	41.57	PK	32.5	-22.6	0	51.47	-	-	74	-22.53	145	105	V
3	* 2.484	28.71	RMS	32.4	-22.7	2.1	38.41	54	-15.59	-	-	145	105	V
4	2.546	29.8	RMS	32.5	-22.6	2.1	39.7	54	-14.3	-	-	145	105	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

RMS - RMS detection


HARMONICS AND SPURIOUS EMISSIONS

LOW CHANNEL HORIZONTAL

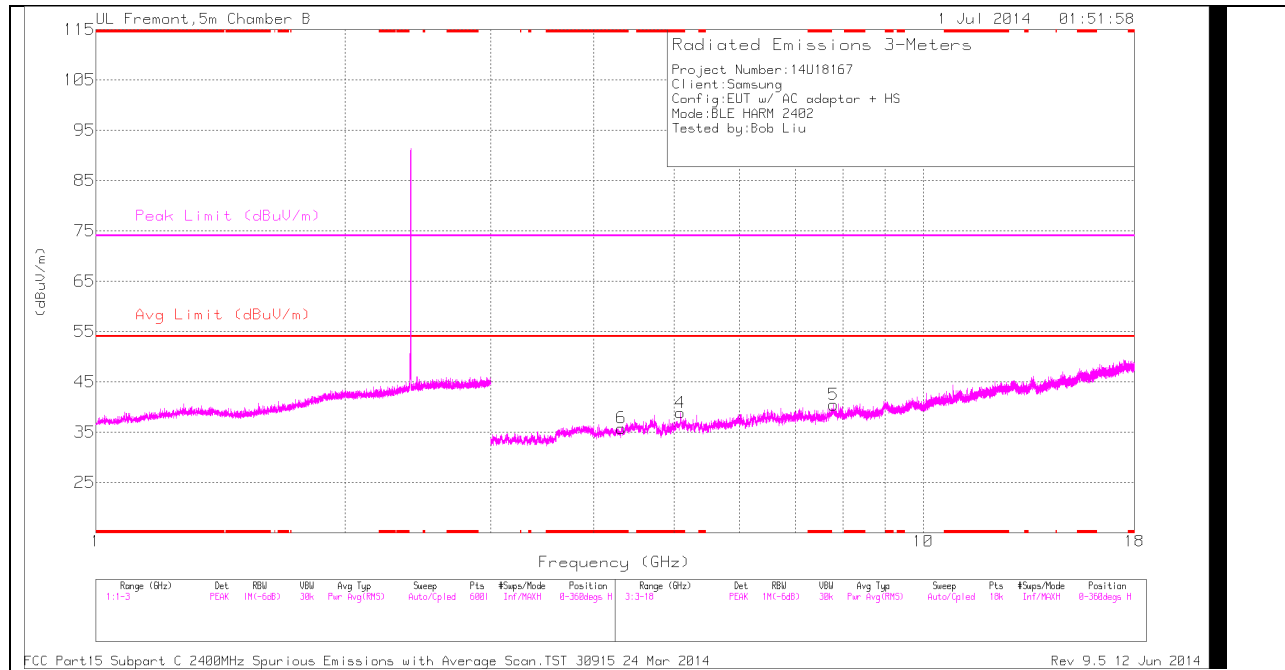

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL VERTICAL

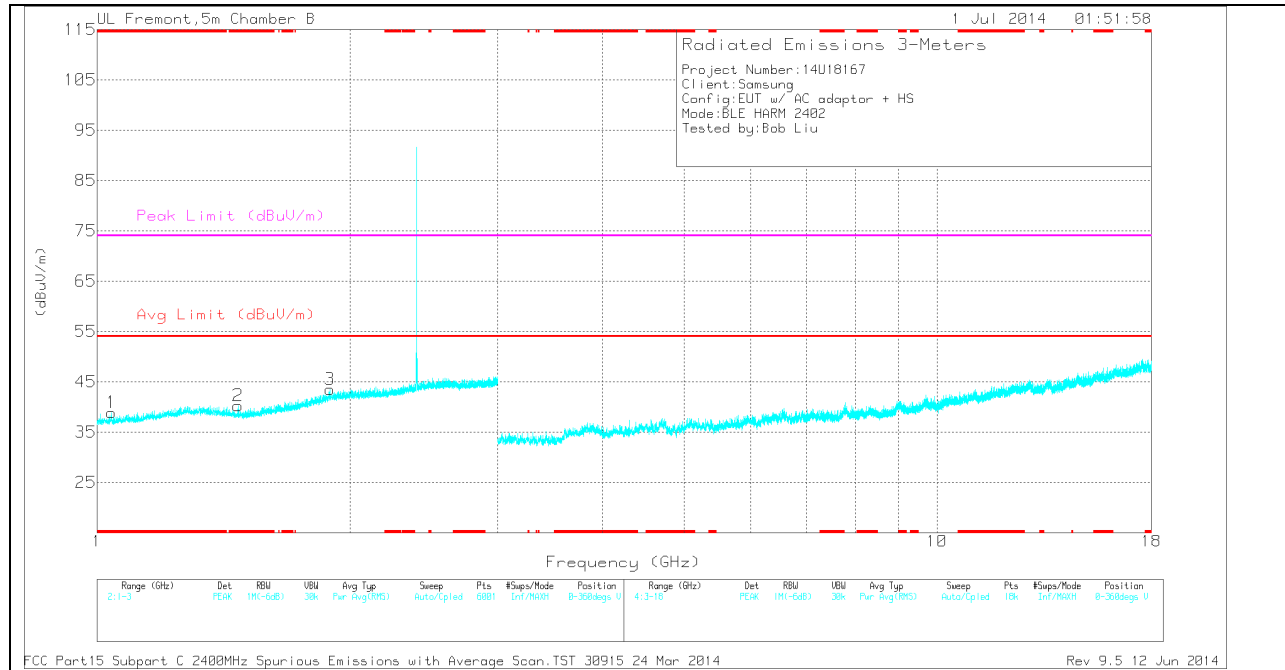

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Filtr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.04	36.47	PK	27.2	-24.8	0	38.87	-	-	74	-35.13	0-360	99	V
2	* 1.472	36.34	PK	28.1	-24.2	0	40.24	-	-	74	-33.76	0-360	99	V
4	* 5.092	33.15	PK	34.2	-28.5	0	38.85	-	-	74	-35.15	0-360	206	H
6	* 4.32	33.18	PK	33.7	-31.1	0	35.78	-	-	74	-38.22	0-360	206	H
3	1.894	35.91	PK	31	-23.4	0	43.51	-	-	-	-	0-360	193	V
5	7.796	30.63	PK	35.7	-25.9	0	40.43	-	-	-	-	0-360	206	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/ Filtr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.04	43.6	PK2	27.2	-24.8	0	46	-	-	74	-28	1	100	V
* 1.472	43.45	PK2	28.1	-24.2	0	47.35	-	-	74	-26.65	1	100	V
* 5.093	40.48	PK2	34.2	-28.5	0	46.18	-	-	74	-27.82	1	213	H
* 4.322	41.46	PK2	33.7	-31.1	0	44.06	-	-	74	-29.94	1	213	H
1.893	42.86	PK2	31	-23.4	0	50.46	-	-	-	-	1	199	V
7.796	37.47	PK2	35.7	-25.9	0	47.27	-	-	-	-	1	199	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

MID CHANNEL HORIZONTAL

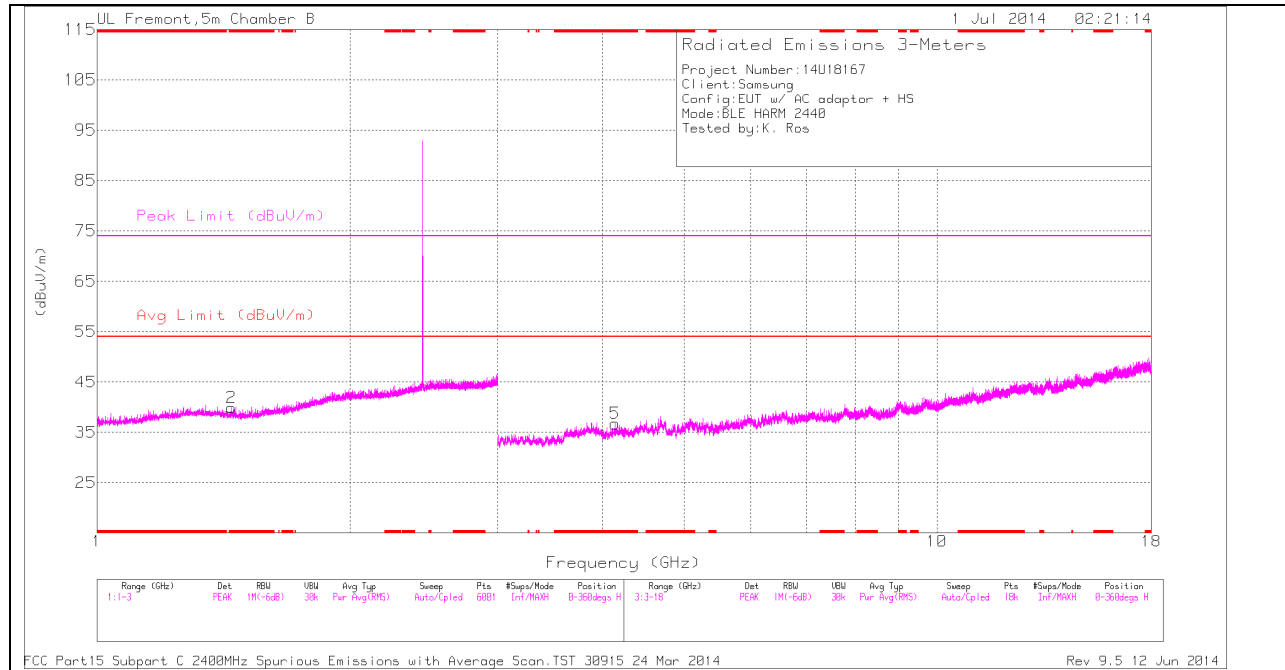

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL VERTICAL

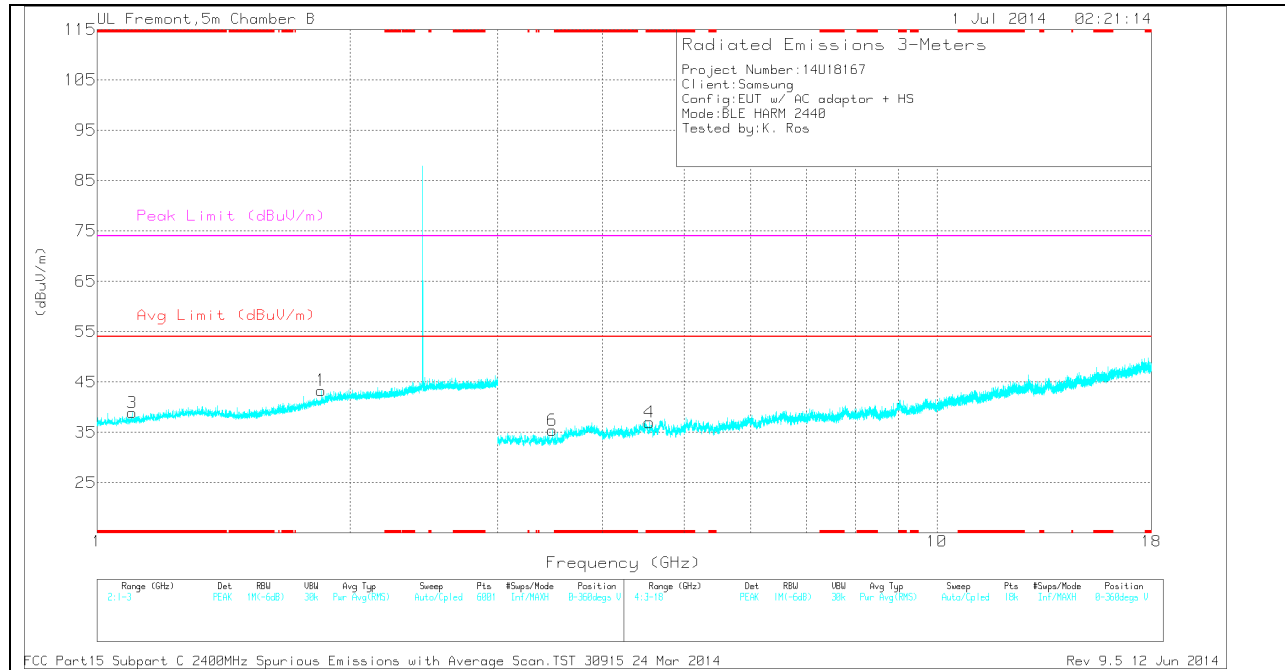

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 1.446	36	PK	28.2	-24.3	0	39.9	-	-	74	-34.1	0-360	99	H
3	* 1.102	36.19	PK	27.4	-24.7	0	38.89	-	-	74	-35.11	0-360	206	V
5	* 4.141	33.24	PK	33.6	-30.1	0	36.74	-	-	74	-37.26	0-360	196	H
4	* 4.546	33.08	PK	34.1	-30.2	0	36.98	-	-	74	-37.02	0-360	99	V
1	1.849	36.43	PK	30.6	-23.7	0	43.33	-	-	-	-	0-360	99	V
6	3.485	33.68	PK	32.8	-31.1	0	35.38	-	-	-	-	0-360	99	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector


Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.445	42.84	PK2	28.2	-24.3	0	46.74	-	-	74	-27.26	1	100	H
* 1.102	43.25	PK2	27.4	-24.7	0	45.95	-	-	74	-28.05	1	214	V
* 4.142	40.27	PK2	33.6	-30.2	0	43.67	-	-	74	-30.33	1	192	H
* 4.546	40.64	PK2	34.1	-30.3	0	44.44	-	-	74	-29.56	1	100	V
1.85	42.78	PK2	30.6	-23.7	0	49.68	-	-	-	-	1	100	V
3.483	40.55	PK2	32.8	-31.1	0	42.25	-	-	-	-	1	100	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK2 - KDB558074 Method: Maximum Peak

HIGH CHANNEL HORIZONTAL

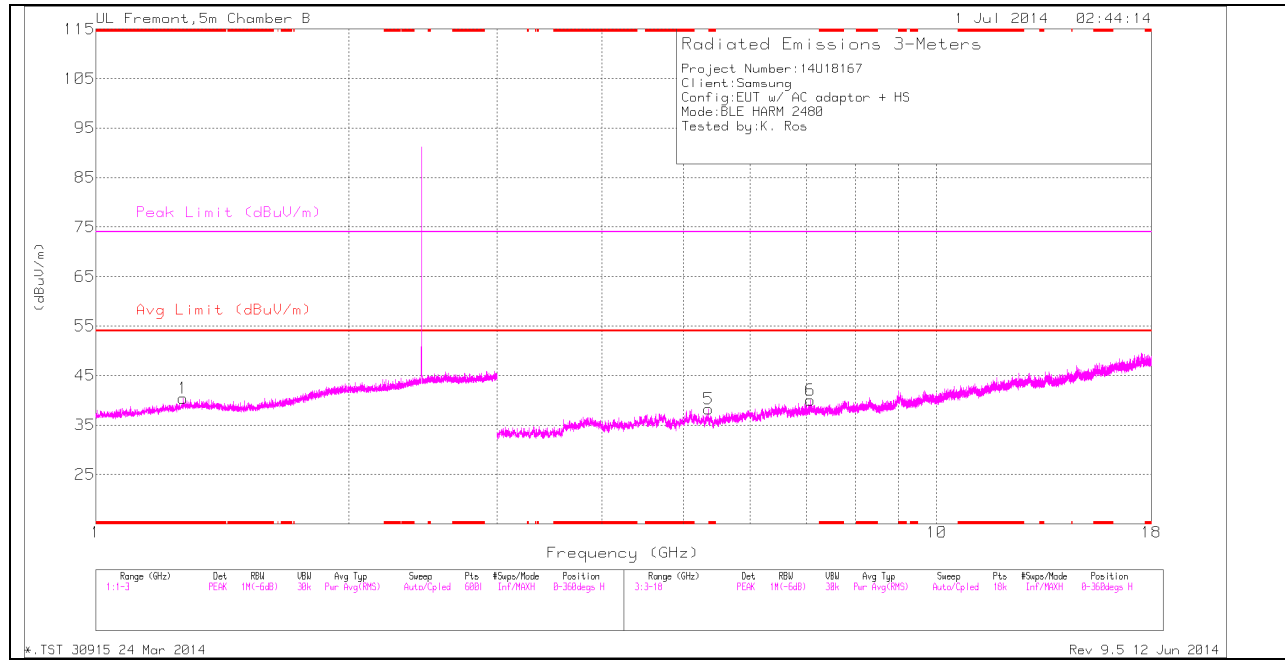

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL VERTICAL

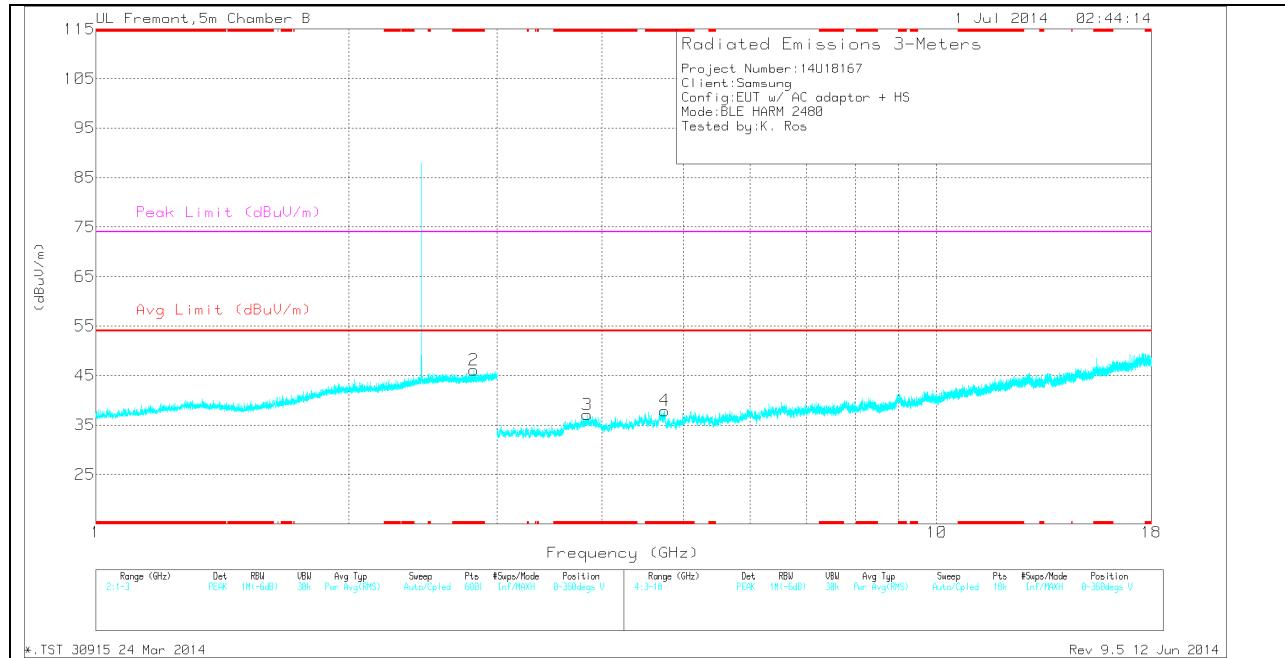

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/Fitr /Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.269	36.25	PK	28.7	-24.5	0	40.45	-	-	74	-33.55	0-360	206	H
2	* 2.816	36.01	PK	32.4	-22.3	0	46.11	-	-	74	-27.89	0-360	99	V
5	* 5.355	32.66	PK	34.5	-28.9	0	38.26	-	-	74	-35.74	0-360	207	H
3	* 3.839	33.69	PK	33.7	-30.3	0	37.09	-	-	74	-36.91	0-360	193	V
4	* 4.75	33.02	PK	34.2	-29.3	0	37.92	-	-	74	-36.08	0-360	99	V
6	7.076	31.69	PK	35.6	-27.3	0	39.99	-	-	-	-	0-360	207	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cb/ Fitr/Pad (dB)	DC Corr (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.269	43.98	PK2	28.6	-24.5	0	48.08	-	-	74	-25.92	1	214	H
* 2.815	42.49	PK2	32.4	-22.3	0	52.59	-	-	74	-21.41	1	100	V
* 5.356	39.26	PK2	34.5	-28.9	0	44.86	-	-	74	-29.14	1	214	H
* 3.841	41.34	PK2	33.7	-30.3	0	44.74	-	-	74	-29.26	1	188	V
7.076	38.87	PK2	35.6	-27.3	0	47.17	-	-	-	-	1	202	H


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK2 - KDB558074 Method: Maximum Peak


9.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL PLOT

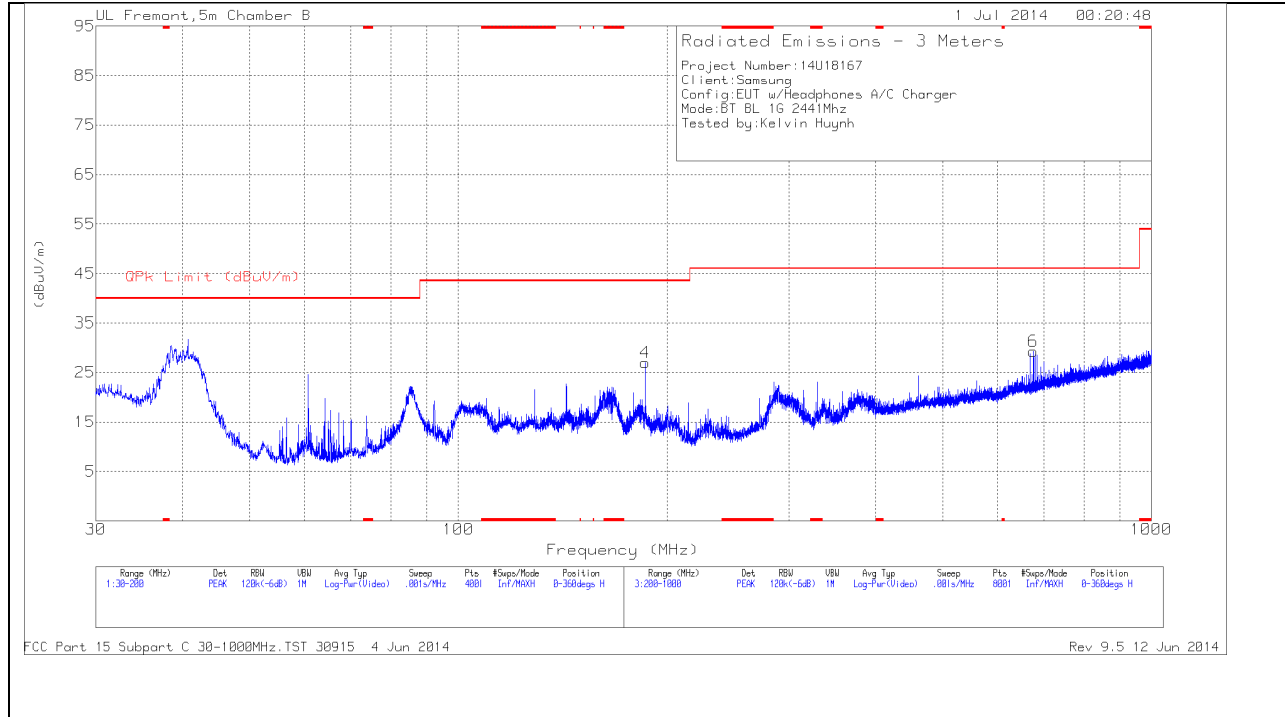

VERTICAL PLOT

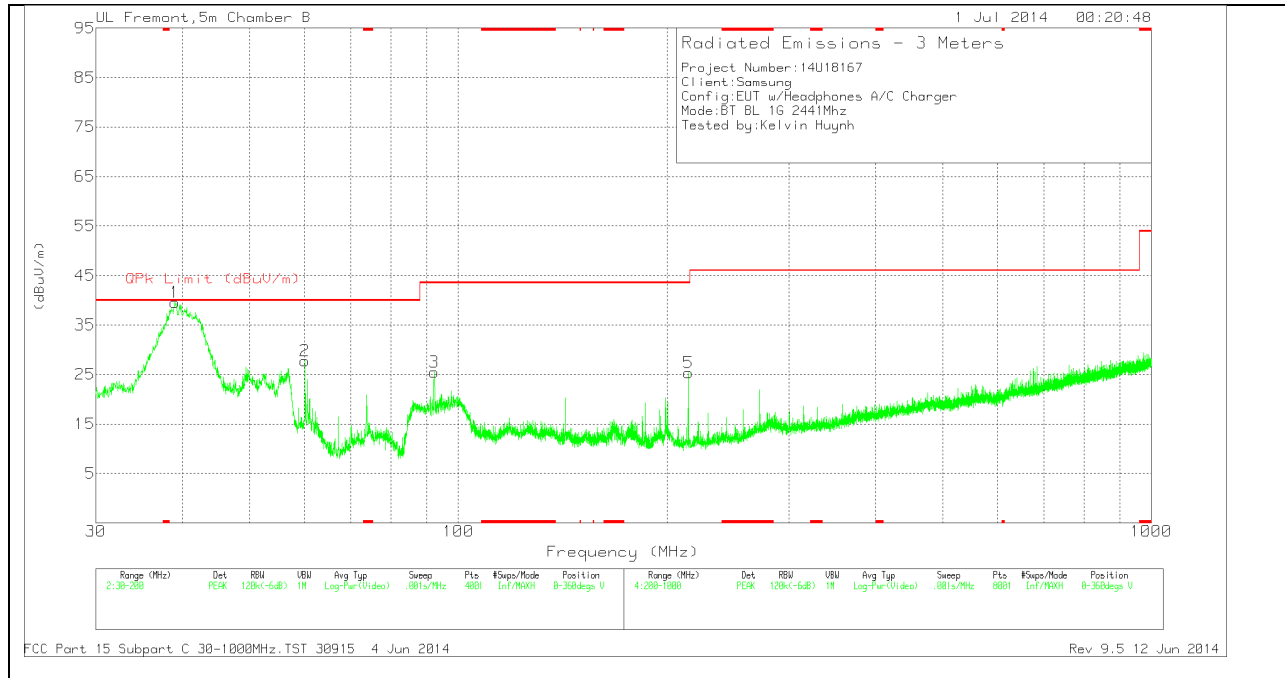

BELOW 1 GHz TABLE

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	39.01	53.54	PK	14.7	-28.7	39.54	40	-.46	0-360	100	V
2	60.09	48.74	PK	7.4	-28.4	27.74	40	-12.26	0-360	100	V
3	92.3475	45.41	PK	8.2	-28.1	25.51	43.52	-18.01	0-360	100	V
4	186.145	43.04	PK	10.9	-27	26.94	43.52	-16.58	0-360	100	H
5	214.8	41.55	PK	10.6	-26.8	25.35	43.52	-18.17	0-360	200	V
6	676	34.48	PK	19.6	-24.8	29.28	46.02	-16.74	0-360	300	H

PK - Peak detector

10. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

LINE 1 PLOT

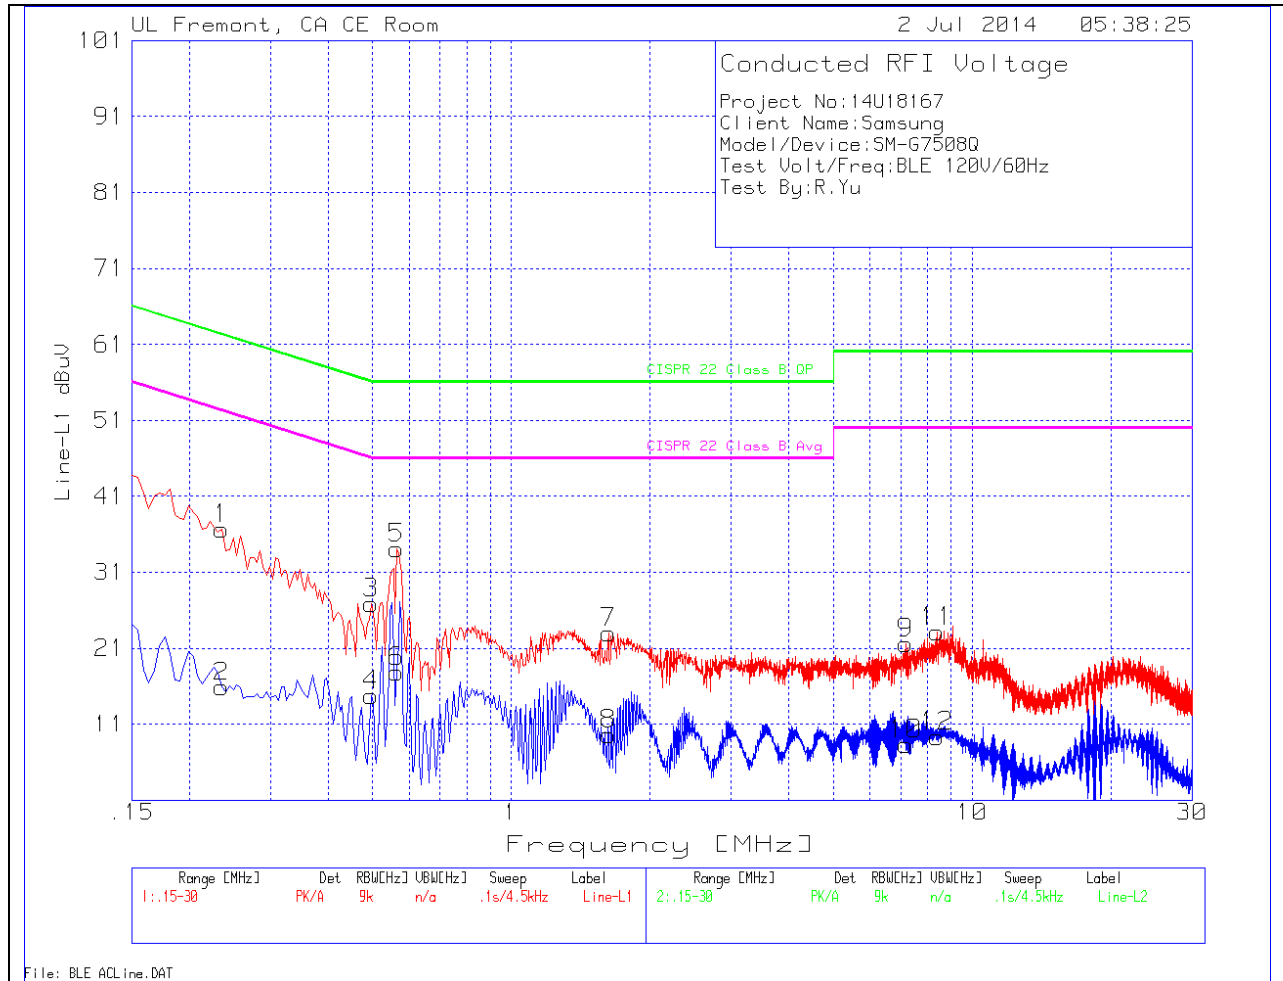


LINE 1 RESULTS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.2355	35.9	PK	.8	0	36.7	62.3	-25.6	-	-
2	.2355	15.05	Av	.8	0	15.85	-	-	52.3	-36.45
3	.4965	26.48	PK	.4	0	26.88	56.1	-29.22	-	-
4	.4965	14.39	Av	.4	0	14.79	-	-	46.1	-31.31
5	.564	33.74	PK	.3	0	34.04	56	-21.96	-	-
6	.564	17.51	Av	.3	0	17.81	-	-	46	-28.19
7	1.626	22.7	PK	.2	.1	23	56	-33	-	-
8	1.626	9.34	Av	.2	.1	9.64	-	-	46	-36.36
9	7.1925	21.25	PK	.2	.1	21.55	60	-38.45	-	-
10	7.1925	7.97	Av	.2	.1	8.27	-	-	50	-41.73
11	8.385	22.88	PK	.2	.1	23.18	60	-36.82	-	-
12	8.385	9	Av	.2	.1	9.3	-	-	50	-40.7

LINE 2 PLOT

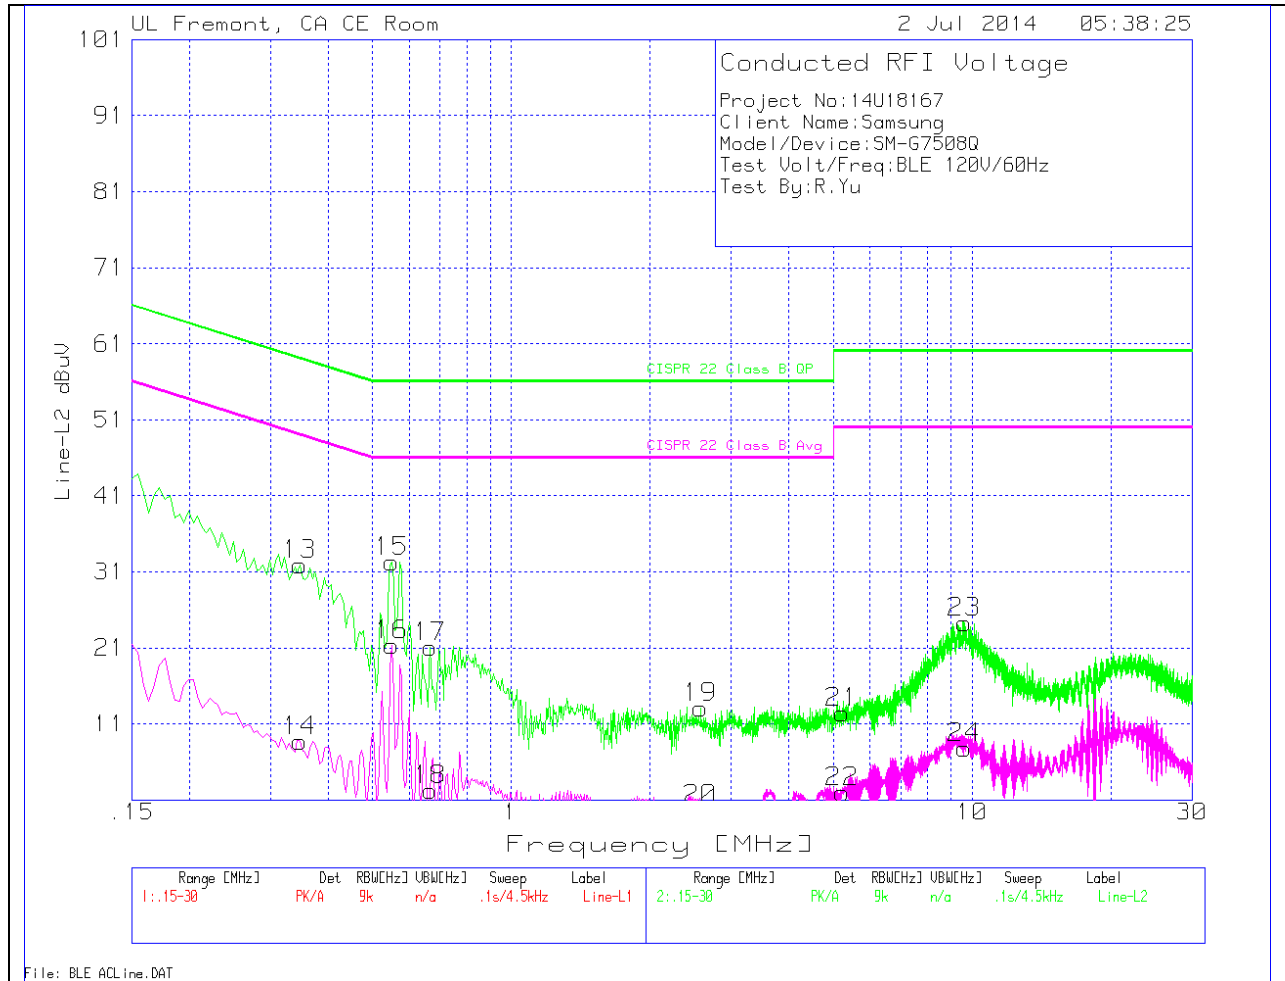

LINE 2 RESULTS

Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
13	.348	31.43	PK	.5	0	31.93	59	-27.07	-	-
14	.348	8.19	Av	.5	0	8.69	-	-	49	-40.31
15	.5505	32.01	PK	.3	0	32.31	56	-23.69	-	-
16	.5505	20.99	Av	.3	0	21.29	-	-	46	-24.71
17	.6675	20.77	PK	.3	0	21.07	56	-34.93	-	-
18	.6675	2	Av	.3	0	2.3	-	-	46	-43.7
19	2.5755	12.78	PK	.2	.1	13.08	56	-42.92	-	-
20	2.5755	-.65	Av	.2	.1	-.35	-	-	46	-46.35
21	5.2305	12.08	PK	.2	.1	12.38	60	-47.62	-	-
22	5.2305	1.64	Av	.2	.1	1.94	-	-	50	-48.06
23	9.627	23.92	PK	.2	.2	24.32	60	-35.68	-	-
24	9.627	7.37	Av	.2	.2	7.77	-	-	50	-42.23

PK - Peak detector

Av - average detection