

FCC DTS REPORT

Certification

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
31 October 2019

Address:
129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Test Site/Location:
74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA

Report No.: HCT-RF-1910-FC007

FCC ID: A3LSMG770F

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model: SM-G770F/DS

Additional Model: SM-G770F/DSM, SM-G770F

EUT Type: Mobile Phone

Average Output Power: Ant.1: 802.11b: 18.21 dBm / 802.11g: 17.60 dBm / 802.11n(HT20): 17.50 dBm
Ant.2: 802.11b: 18.44 dBm / 802.11g: 17.47 dBm / 802.11n(HT20): 17.57 dBm
Ant.1&2: 802.11g: 20.51 dBm / 802.11n(HT20): 20.50 dBm

Frequency Range: 2412 MHz - 2472 MHz

Modulation type: CCK/DSSS/OFDM

FCC Classification: Digital Transmission System(DTS)

FCC Rule Part(s): Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report prepared by : Jeong Ho Kim
Engineer of Telecommunication testing center

Approved by : Kwon Jeong
Manager of Telecommunication testing center

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1910-FC007	31 October 2019	- First Approval Report

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

Table of Contents

1. EUT DESCRIPTION	4
ANTENNA CONFIGURATIONS	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	6
3. INSTRUMENT CALIBRATION.....	6
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS.....	9
8. SUMMARY TEST OF RESULTS	26
9. TEST RESULT	27
9.1 DUTY CYCLE.....	27
9.2 6dB BANDWIDTH.....	30
9.3 OUTPUT POWER	36
9.4 POWER SPECTRAL DENSITY	52
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	59
9.6 RADIATED SPURIOUS EMISSIONS	86
9.7 RADIATED RESTRICTED BAND EDGES	105
9.8 POWERLINE CONDUCTED EMISSIONS	115
10. LIST OF TEST EQUIPMENT	119
11. ANNEX A_ TEST SETUP PHOTO	121

1. EUT DESCRIPTION

Model	SM-G770F/DS		
Additional Model	SM-G770F/DSM, SM-G770F		
EUT Type	Mobile Phone		
Power Supply	DC 3.85 V		
Battery Information	Model: EB-BA907ABY L Type: Li-ion Battery		
Travel Adapter Information	Model : EP-TA845 Manufacture: SOLUM		
Data Cable Information	Model : EP-DN975BBE Manufacture: RF TECH		
Ear-jack Information	Model : GHSS028-W9 Manufacture: BUJEON		
Frequency Range	2412 MHz - 2472 MHz		
Max. RF Output Power	<u>Peak Power</u> (For information only)	Ant. 1 (SISO)	802.11b : 20.86 dBm 802.11g : 26.25 dBm 802.11n(HT20) : 26.28 dBm
		Ant.2 (SISO)	802.11b : 21.00 dBm 802.11g : 25.64 dBm 802.11n(HT20) : 25.63 dBm
		Ant.1&2 (MIMO)	802.11g : 28.94 dBm 802.11n(HT20) : 28.97 dBm
	<u>Average Power</u>	Ant. 1 (SISO)	802.11b: 18.21 dBm 802.11g: 17.60 dBm 802.11n(HT20): 17.50 dBm
		Ant.2 (SISO)	802.11b: 18.44 dBm 802.11g: 17.47 dBm 802.11n(HT20): 17.57 dBm
		Ant.1&2 (MIMO)	802.11g: 20.51 dBm 802.11n(HT20): 20.50 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n		
Number of Channels	13 Channels		
Antenna Specification	Antenna type: LDS Peak Gain Ant.1: -3.57 dBi / Ant.2: -6.42 dBi		
Date(s) of Tests	September 16, 2019 ~ October 29, 2019		

ANTENNA CONFIGURATIONS

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11b	O	O	X	X
802.11g	O	O	X	O
802.11n(HT20)	O	O	O	O

Note:

1. O = Support, X = Not Support
2. SISO = Single Input Single Output
3. SDM = Spatial Diversity Multiplexing
4. CDD = Cyclic Delay Diversity

2. This device supports simultaneous transmission operation, which allows for two SISO channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna.

Frequency	Supported
2.4 GHz Ant 1 + 5 GHz Ant 2	O
2.4 GHz Ant 2 + 5 GHz Ant 1	X
2.4 GHz Ant 1 + 5 GHz Ant 1	X
2.4 GHz Ant 2 + 5 GHz Ant 2	X

3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) e) (iii)

$$\text{Directional gain} = G_{\text{ANT MAX}} + 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dBi}$$

($N_{\text{ANT}} = 2$, $N_{\text{SS}} = 2$, $G_{\text{ANT MAX}}$ is the gain of the antenna having the highest gain)

Band	Ant Gain (dBi)		$N_{\text{ANT}}/N_{\text{SS}}$	Directional Gain ($= G_{\text{ANT MAX}} + 10 \log(N_{\text{ANT}}/N_{\text{SS}})$ dBi)
DTS	ANT1	-3.57	2 / 2	-1.85
	ANT2	-6.42		

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled "guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) 'the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices'.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3.75 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has

been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

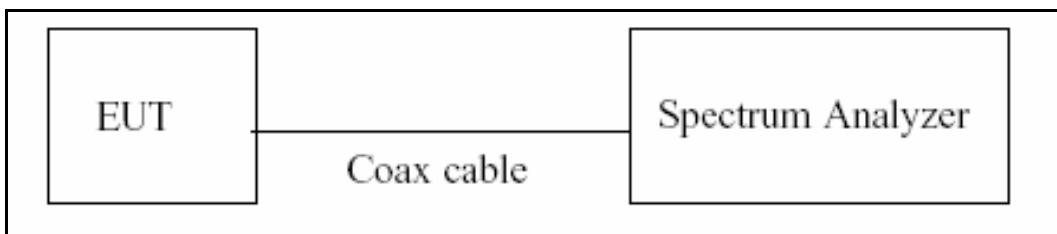

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration



Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW $\geq 3 \times$ RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration



Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

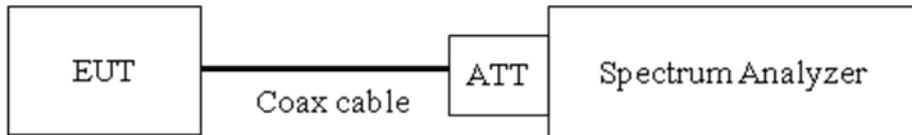

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3) RBW = 3 kHz ≤ RBW ≤ 100 kHz.
- 4) VBW ≥ 3 x RBW.
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss

7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions**Limit**

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration**Test Procedure**

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	20.05
100	20.10
200	20.13
300	20.18
400	20.21
500	20.23
600	20.23
700	20.25
800	20.26
900	20.28
1000	20.29
2000	20.42
2400	20.47
2500	20.47
3000	20.52
4000	20.60
5000	20.68
6000	20.73
7000	20.81
8000	20.88
9000	20.94
10000	21.02
11000	21.05
12000	21.13
13000	21.23
14000	21.20
15000	21.25
16000	21.29
17000	21.33
18000	21.40
19000	21.44
20000	21.48
21000	21.65
22000	21.64
23000	21.67
24000	21.71
25000	21.75
26000	21.84

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss + Cable loss


7.6. Radiated Test

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

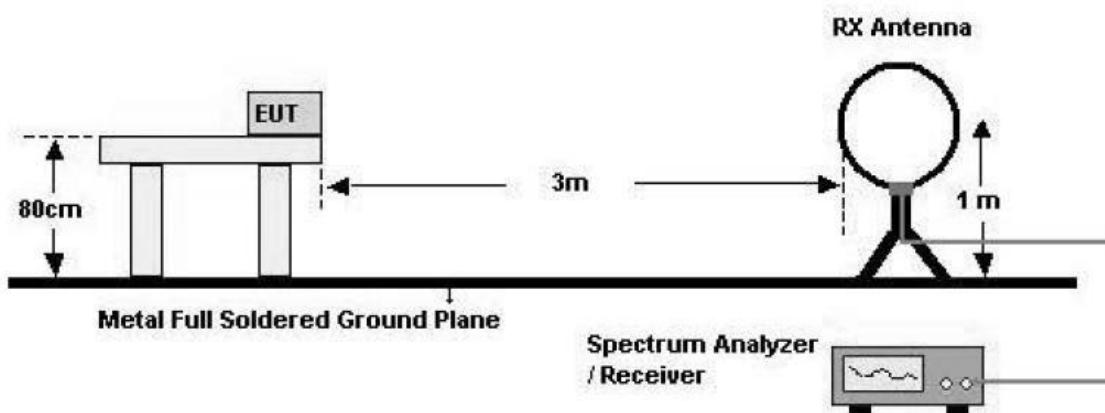

30 MHz - 1 GHz

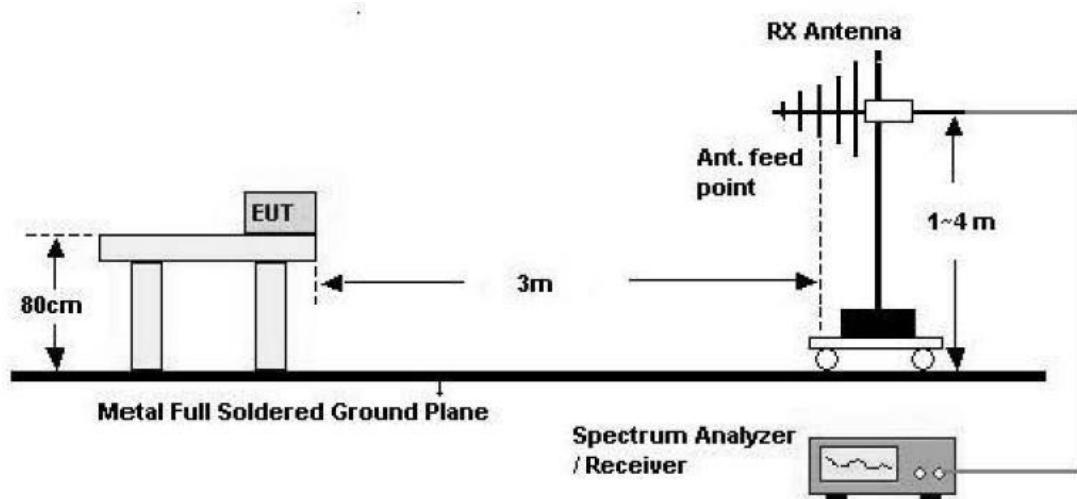

Above 1 GHz

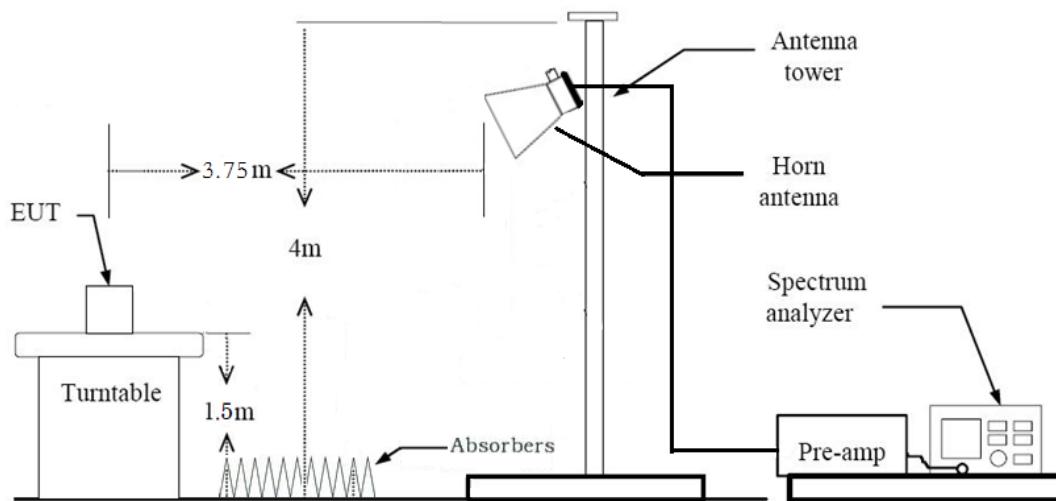

Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = - 80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = - 40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
4. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
5. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

In general, (1) is used mainly

6. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
7. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle \geq 98%)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $<$ 98%)

$$\begin{aligned} &= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)} \\ &+ \text{Duty Cycle Factor} \end{aligned}$$

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3.75 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. According to SVSWR requirement in ANSI 63.4-2014, We performed the radiated test at 3.75 m distance from center of turn table. So, we applied the distance factor(reference distance : 3 m).
 - ◆ Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)
6. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
7. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
8. The unit was tested with its standard battery.
9. Spectrum Setting
 - (1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

11. Total(Measurement Type : Peak)

$$\begin{aligned} &= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} + \text{Distance Factor(D.F)} - \text{AMP Gain (A.G)} \\ &\quad + \text{Attenuator(ATT)} \end{aligned}$$

Total(Measurement Type : Average, Duty cycle \geq 98%)

$$\begin{aligned} &= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} + \text{Distance Factor(D.F)} - \text{AMP Gain (A.G)} \\ &\quad + \text{Attenuator(ATT)} \end{aligned}$$

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F) – AMP Gain (A.G)
+Attenuator(ATT) + Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : X,Y
 - Radiated Restricted Band Edge : Y
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane
6. SM-G770F/DSM, SM-G770F, SM-G770F/DS were tested and the worst case results are reported.
(Worst case : SM-G770F/DS)

Radiated test(DBS)

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
 - Worstcase : Stand alone
2. EUT Axis
 - Radiated Spurious Emissions : Y
3. The following tables show the worst case configurations determined during testing.

Description	2.4 GHz Emission	5 GHz Emission
Antenna	1	2
Channel	1, 6, 11	36, 100, 165
Data Rate	1 Mbps	6 Mbps
Mode	802.11b	802.11a

4. SM-G770F/DSM, SM-G770F, SM-G770F/DS were tested and the worst case results are reported.
(Worst case : SM-G770F/DS)

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + External accessories(Earphone, etc)+Travel Adapter, Stand alone + Travel Adapter
 - Worstcase : Stand alone + Travel Adapter
2. SM-G770F/DSM, SM-G770F, SM-G770F/DS were tested and the worst case results are reported.
(Worst case : SM-G770F/DS)

Conducted test

1. The EUT was configured with data rate of highest power.
2. SM-G770F/DSM, SM-G770F, SM-G770F/DS were tested and the worst case results are reported.
(Worst case : SM-G770F/DS)

8. SUMMARY TEST OF RESULTS

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.616	8.710	0.989	0.047
	2	4.315	4.351	0.992	0.036
	5.5	1.629	1.659	0.982	0.079
	11	0.863	0.894	0.966	0.152
802.11g	6	1.432	1.469	0.975	0.110
	9	0.959	0.996	0.963	0.165
	12	0.727	0.765	0.951	0.217
	18	0.492	0.529	0.929	0.318
	24	0.376	0.414	0.910	0.412
	36	0.256	0.292	0.877	0.571
	48	0.200	0.236	0.847	0.719
	54	0.180	0.216	0.833	0.792
802.11n (HT20)	6.5 (MCS0)	1.340	1.376	0.974	0.113
	13 (MCS1)	0.688	0.725	0.949	0.226
	19.5 (MCS2)	0.472	0.509	0.928	0.325
	26 (MCS3)	0.364	0.400	0.909	0.414
	39 (MCS4)	0.256	0.293	0.876	0.573
	52 (MCS5)	0.200	0.236	0.849	0.711
	58.5 (MCS6)	0.184	0.220	0.836	0.779
	65 (MCS7)	0.168	0.204	0.824	0.841

Test Plots


Duty cycle plot (802.11b(1Mbps))

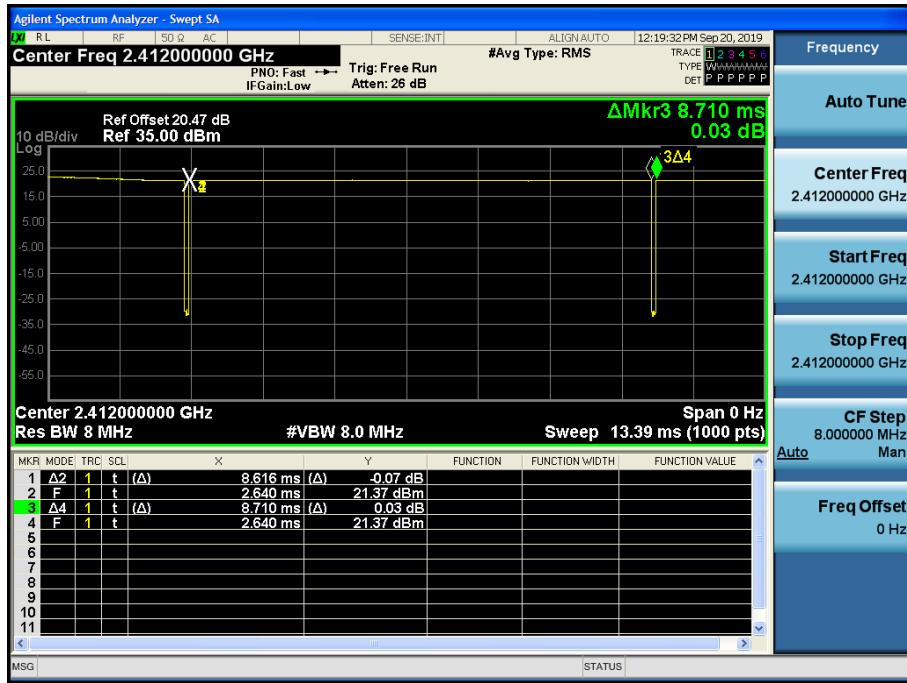

Duty cycle plot (802.11g(6Mbps))

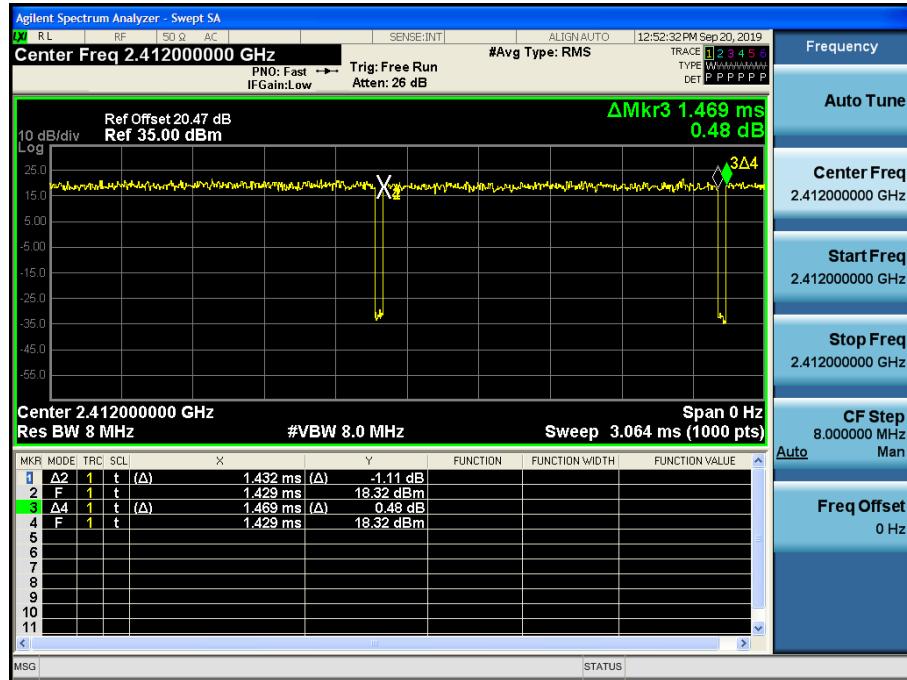

Duty cycle plot (802.11n(MCS0))

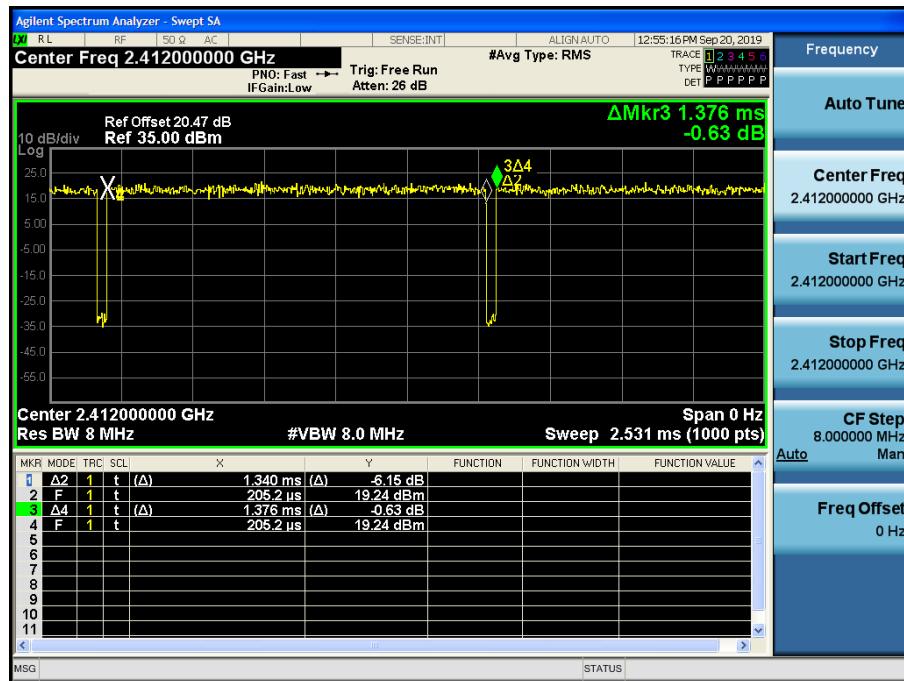

Note:

In order to simplify the report, attached plots were only the most lowest datarate.

9.2 6dB BANDWIDTH
[ANT1]

802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	9.072	0.5
2437	6	9.015	0.5
2462	11	8.601	0.5
2467	12	8.123	0.5
2472	13	8.113	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.09	0.5
2437	6	15.09	0.5
2462	11	15.06	0.5
2467	12	13.84	0.5
2472	13	15.09	0.5

802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	13.85	0.5
2437	6	15.08	0.5
2462	11	15.07	0.5
2467	12	15.06	0.5
2472	13	13.84	0.5

[ANT2]


802.11b Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	8.584	0.5
2437	6	9.009	0.5
2462	11	9.059	0.5
2467	12	8.584	0.5
2472	13	8.600	0.5

802.11g Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.07	0.5
2437	6	15.11	0.5
2462	11	15.07	0.5
2467	12	15.08	0.5
2472	13	12.58	0.5


802.11n Mode		Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.		
2412	1	15.10	0.5
2437	6	15.05	0.5
2462	11	15.05	0.5
2467	12	15.05	0.5
2472	13	12.62	0.5

[ANT1] Test Plots


6dB Bandwidth plot (802.11b-CH 13)

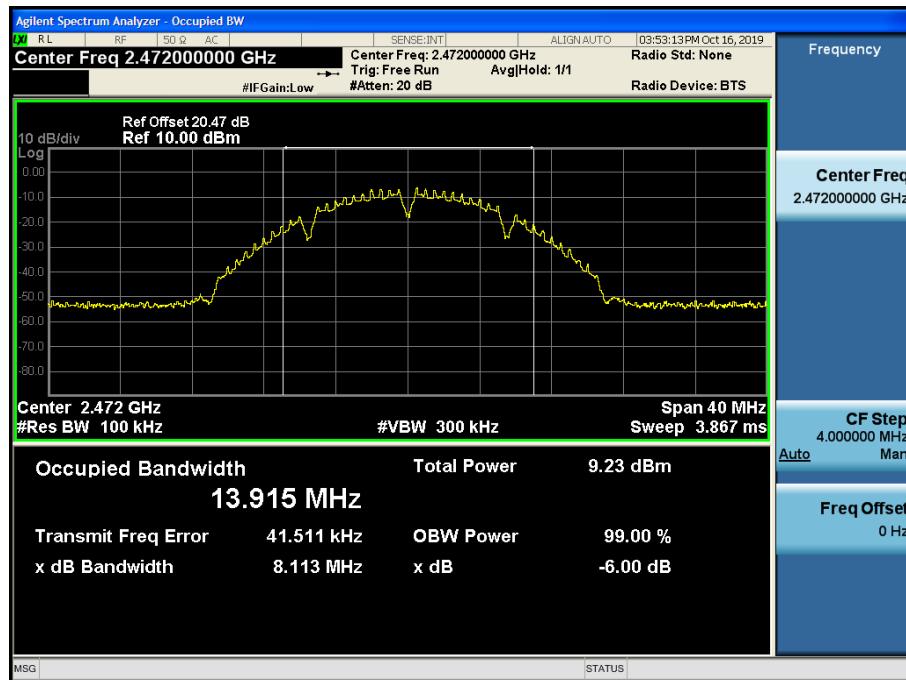

6dB Bandwidth plot (802.11g-CH 12)

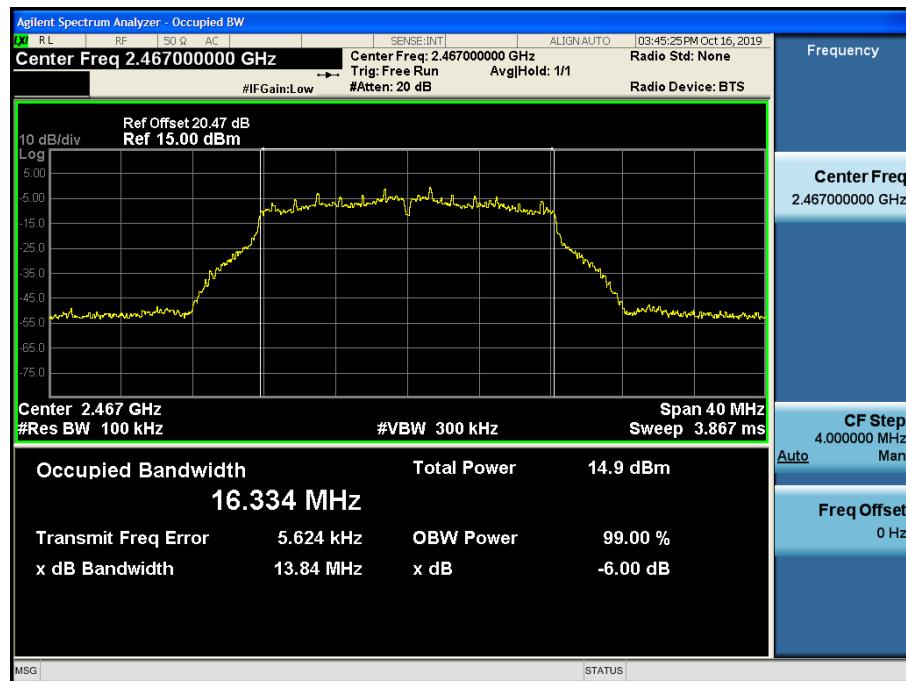


6dB Bandwidth plot (802.11n_HT20-CH 13)

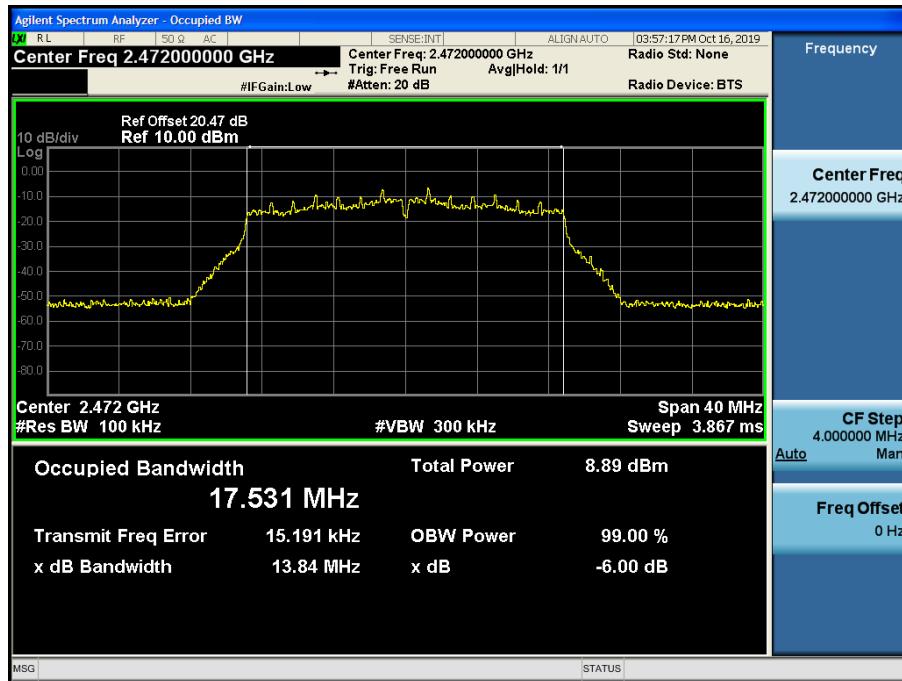

[ANT2] Test Plots


6dB Bandwidth plot (802.11b-CH 1)

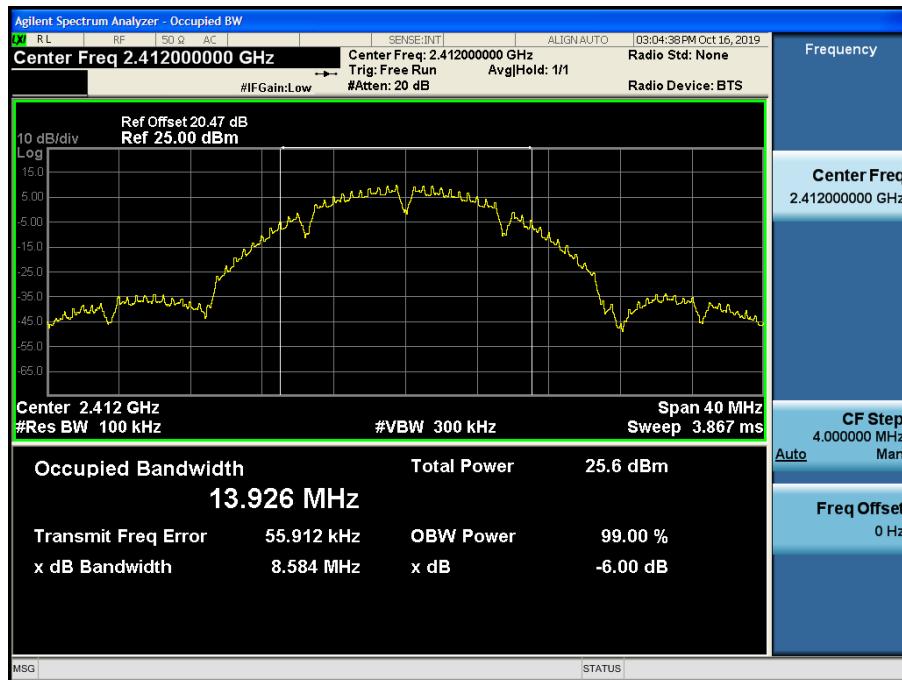

6dB Bandwidth plot (802.11g-CH 13)



6dB Bandwidth plot (802.11n_HT20-CH 13)

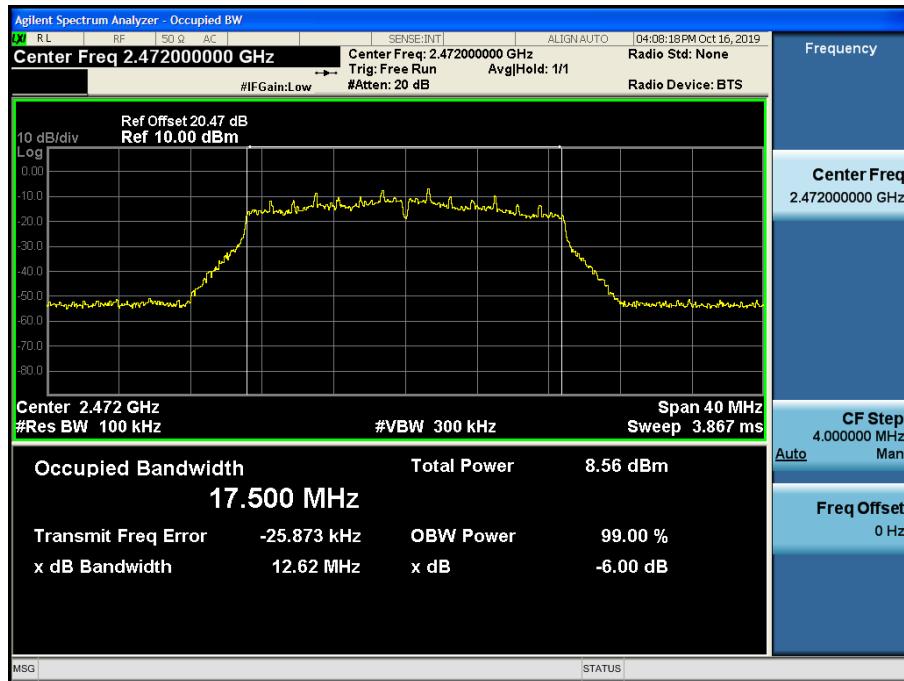**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.47 dB is offset for 2.4 GHz Band

[ANT1]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	20.72	30	17.5
		2	20.84	30	
		5.5	20.83	30	
		11	20.86	30	
2437	6	1	20.37	30	17.5
		2	20.61	30	
		5.5	20.65	30	
		11	20.64	30	
2462	11	1	20.06	30	17
		2	20.28	30	
		5.5	20.27	30	
		11	20.23	30	
2467	12	1	10.69	30	7
		2	10.91	30	
		5.5	10.85	30	
		11	10.88	30	
2472	13	1	5.20	30	0.5
		2	5.39	30	
		5.5	5.14	30	
		11	5.26	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	22.42	30	16.5
		9	22.48	30	
		12	22.34	30	
		18	24.80	30	
		24	24.12	30	
		36	25.84	30	
		48	25.85	30	
		54	25.91	30	
2437	6	6	22.78	30	17
		9	22.74	30	
		12	22.83	30	
		18	24.84	30	
		24	24.35	30	
		36	26.14	30	
		48	26.17	30	
		54	26.25	30	
2462	11	6	22.10	30	16.5
		9	22.21	30	
		12	22.15	30	
		18	24.22	30	
		24	23.69	30	
		36	25.62	30	
		48	25.68	30	
		54	25.68	30	
2467	12	6	13.42	30	7.5
		9	13.51	30	
		12	13.37	30	
		18	15.37	30	
		24	15.00	30	
		36	18.69	30	
		48	19.10	30	
		54	18.54	30	
2472	13	6	7.50	30	1
		9	7.82	30	
		12	7.69	30	
		18	9.71	30	
		24	9.11	30	
		36	12.54	30	
		48	13.22	30	
		54	12.47	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	22.55	30	16.5
		1	22.63	30	
		2	24.67	30	
		3	24.05	30	
		4	25.93	30	
		5	25.87	30	
		6	25.91	30	
		7	25.94	30	
2437	6	0	22.82	30	17
		1	23.12	30	
		2	25.01	30	
		3	24.38	30	
		4	26.21	30	
		5	26.21	30	
		6	26.19	30	
		7	26.28	30	
2462	11	0	22.99	30	17
		1	22.76	30	
		2	24.63	30	
		3	24.18	30	
		4	25.73	30	
		5	25.71	30	
		6	25.74	30	
		7	25.72	30	
2467	12	0	13.69	30	7.5
		1	13.54	30	
		2	15.47	30	
		3	14.88	30	
		4	19.54	30	
		5	18.19	30	
		6	18.51	30	
		7	18.25	30	
2472	13	0	7.82	30	1
		1	7.70	30	
		2	9.67	30	
		3	9.20	30	
		4	13.21	30	
		5	12.51	30	
		6	12.24	30	
		7	12.35	30	

[ANT2]

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	1	20.88	30	17.5
		2	21.00	30	
		5.5	20.96	30	
		11	20.98	30	
2437	6	1	20.00	30	17.5
		2	20.16	30	
		5.5	20.20	30	
		11	20.24	30	
2462	11	1	20.38	30	17.5
		2	20.61	30	
		5.5	20.62	30	
		11	20.69	30	
2467	12	1	11.06	30	7
		2	11.30	30	
		5.5	11.20	30	
		11	11.45	30	
2472	13	1	5.27	30	0.5
		2	5.23	30	
		5.5	5.20	30	
		11	5.32	30	

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	6	22.87	30	16.5
		9	22.73	30	
		12	22.76	30	
		18	24.57	30	
		24	24.27	30	
		36	25.60	30	
		48	25.62	30	
		54	25.64	30	
2437	6	6	22.79	30	17
		9	22.85	30	
		12	22.71	30	
		18	24.51	30	
		24	24.28	30	
		36	25.62	30	
		48	25.62	30	
		54	25.59	30	
2462	11	6	21.76	30	16.5
		9	21.72	30	
		12	21.70	30	
		18	23.62	30	
		24	23.28	30	
		36	25.14	30	
		48	25.14	30	
		54	25.14	30	
2467	12	6	13.49	30	7.5
		9	13.39	30	
		12	13.41	30	
		18	15.46	30	
		24	15.17	30	
		36	18.54	30	
		48	18.89	30	
		54	18.29	30	
2472	13	6	7.50	30	1
		9	7.35	30	
		12	7.41	30	
		18	9.51	30	
		24	9.18	30	
		36	12.34	30	
		48	12.66	30	
		54	11.98	30	

802.11n Mode		MCS Index	Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.				
2412	1	0	22.99	30	16.5
		1	22.75	30	
		2	24.56	30	
		3	24.16	30	
		4	25.58	30	
		5	25.59	30	
		6	25.58	30	
		7	25.63	30	
2437	6	0	22.88	30	17
		1	22.96	30	
		2	24.78	30	
		3	24.24	30	
		4	25.61	30	
		5	25.62	30	
		6	25.61	30	
		7	25.61	30	
2462	11	0	23.17	30	17
		1	23.04	30	
		2	24.50	30	
		3	24.23	30	
		4	25.29	30	
		5	25.30	30	
		6	25.25	30	
		7	25.28	30	
2467	12	0	13.46	30	7.5
		1	13.43	30	
		2	15.48	30	
		3	14.98	30	
		4	19.35	30	
		5	18.22	30	
		6	18.38	30	
		7	18.01	30	
2472	13	0	7.56	30	1
		1	7.48	30	
		2	9.44	30	
		3	9.05	30	
		4	13.23	30	
		5	11.99	30	
		6	12.04	30	
		7	11.89	30	

[MIMO]

802.11g Mode		Rate (Mbps)	ANT1 Measured Power(dBm)	ANT2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.						
2412	1	6	22.42	22.87	25.66	30	16.5
		9	22.48	22.73	25.62	30	
		12	22.34	22.76	25.57	30	
		18	24.80	24.57	27.70	30	
		24	24.12	24.27	27.21	30	
		36	25.84	25.60	28.73	30	
		48	25.85	25.62	28.75	30	
		54	25.91	25.64	28.79	30	
2437	6	6	22.78	22.79	25.80	30	17
		9	22.74	22.85	25.80	30	
		12	22.83	22.71	25.78	30	
		18	24.84	24.51	27.69	30	
		24	24.35	24.28	27.33	30	
		36	26.14	25.62	28.90	30	
		48	26.17	25.62	28.91	30	
		54	26.25	25.59	28.94	30	
2462	11	6	22.10	21.76	24.94	30	16.5
		9	22.21	21.72	24.98	30	
		12	22.15	21.70	24.94	30	
		18	24.22	23.62	26.94	30	
		24	23.69	23.28	26.50	30	
		36	25.62	25.14	28.40	30	
		48	25.68	25.14	28.43	30	
		54	25.68	25.14	28.43	30	
2467	12	6	13.42	13.49	16.47	30	7.5
		9	13.51	13.39	16.46	30	
		12	13.37	13.41	16.40	30	
		18	15.37	15.46	18.43	30	
		24	15.00	15.17	18.10	30	
		36	18.69	18.54	21.63	30	
		48	19.10	18.89	22.01	30	
		54	18.54	18.29	21.43	30	
2472	13	6	7.50	7.50	10.51	30	1
		9	7.82	7.35	10.60	30	
		12	7.69	7.41	10.56	30	
		18	9.71	9.51	12.62	30	
		24	9.11	9.18	12.16	30	
		36	12.54	12.34	15.45	30	
		48	13.22	12.66	15.96	30	
		54	12.47	11.98	15.24	30	

802.11g Mode		Rate (Mbps)	ANT1	ANT2	MIMO	Limit (dBm)	Power Level Setting
Frequency[MHz]	Channel No.		Measured Power(dBm)	Measured Power(dBm)	Measured Power(dBm)		
2412	1	0	22.55	22.99	25.79	30	16.5
		1	22.63	22.75	25.70	30	
		2	24.67	24.56	27.62	30	
		3	24.05	24.16	27.12	30	
		4	25.93	25.58	28.76	30	
		5	25.87	25.59	28.74	30	
		6	25.91	25.58	28.76	30	
		7	25.94	25.63	28.80	30	
2437	6	0	22.82	22.88	25.86	30	17
		1	23.12	22.96	26.05	30	
		2	25.01	24.78	27.91	30	
		3	24.38	24.24	27.32	30	
		4	26.21	25.61	28.93	30	
		5	26.21	25.62	28.94	30	
		6	26.19	25.61	28.92	30	
		7	26.28	25.61	28.97	30	
2462	11	0	22.99	23.17	26.09	30	17
		1	22.76	23.04	25.91	30	
		2	24.63	24.50	27.58	30	
		3	24.18	24.23	27.22	30	
		4	25.73	25.29	28.53	30	
		5	25.71	25.30	28.52	30	
		6	25.74	25.25	28.51	30	
		7	25.72	25.28	28.52	30	
2467	12	0	13.69	13.46	16.59	30	7.5
		1	13.54	13.43	16.50	30	
		2	15.47	15.48	18.49	30	
		3	14.88	14.98	17.94	30	
		4	19.54	19.35	22.46	30	
		5	18.19	18.22	21.22	30	
		6	18.51	18.38	21.46	30	
		7	18.25	18.01	21.14	30	
2472	13	0	7.82	7.56	10.70	30	1
		1	7.70	7.48	10.60	30	
		2	9.67	9.44	12.57	30	
		3	9.20	9.05	12.14	30	
		4	13.21	13.23	16.23	30	
		5	12.51	11.99	15.27	30	
		6	12.24	12.04	15.15	30	
		7	12.35	11.89	15.14	30	

Average Power

1. Power Meter offset = Attenuator loss + Cable loss
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 20.47 dB is offset for 2.4 GHz Band.

[ANT1]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	18.02	0.047	18.07	30	17.5
		2	18.16	0.036	18.20	30	
		5.5	18.13	0.079	18.21	30	
		11	18.05	0.152	18.20	30	
2437	6	1	17.83	0.047	17.87	30	17.5
		2	18.02	0.036	18.05	30	
		5.5	17.99	0.079	18.07	30	
		11	17.91	0.152	18.06	30	
2462	11	1	17.52	0.047	17.57	30	17
		2	17.69	0.036	17.72	30	
		5.5	17.65	0.079	17.73	30	
		11	17.57	0.152	17.72	30	
2467	12	1	7.75	0.047	7.80	30	7
		2	8.02	0.036	8.06	30	
		5.5	7.94	0.079	8.02	30	
		11	7.92	0.152	8.07	30	
2472	13	1	1.62	0.047	1.67	30	0.5
		2	1.68	0.036	1.72	30	
		5.5	1.74	0.079	1.82	30	
		11	1.57	0.152	1.72	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	16.33	0.110	16.44	30	16.5
		9	16.24	0.165	16.41	30	
		12	16.22	0.217	16.44	30	
		18	16.77	0.318	17.09	30	
		24	16.72	0.412	17.14	30	
		36	16.01	0.571	16.58	30	
		48	15.88	0.719	16.60	30	
		54	15.80	0.792	16.59	30	
2437	6	6	16.79	0.110	16.90	30	17
		9	16.75	0.165	16.91	30	
		12	16.70	0.217	16.91	30	
		18	17.26	0.318	17.58	30	
		24	17.19	0.412	17.60	30	
		36	16.46	0.571	17.03	30	
		48	16.34	0.719	17.06	30	
		54	16.28	0.792	17.07	30	
2462	11	6	16.22	0.110	16.33	30	16.5
		9	16.16	0.165	16.33	30	
		12	16.12	0.217	16.34	30	
		18	16.63	0.318	16.95	30	
		24	16.60	0.412	17.01	30	
		36	15.87	0.571	16.44	30	
		48	15.74	0.719	16.46	30	
		54	15.67	0.792	16.47	30	
2467	12	6	7.40	0.110	7.51	30	7.5
		9	7.34	0.165	7.51	30	
		12	7.35	0.217	7.57	30	
		18	7.78	0.318	8.10	30	
		24	7.80	0.412	8.21	30	
		36	7.09	0.571	7.66	30	
		48	6.93	0.719	7.65	30	
		54	6.85	0.792	7.64	30	
2472	13	6	1.30	0.110	1.41	30	1
		9	1.32	0.165	1.49	30	
		12	1.28	0.217	1.50	30	
		18	1.72	0.318	2.04	30	
		24	1.76	0.412	2.17	30	
		36	0.82	0.571	1.39	30	
		48	0.80	0.719	1.52	30	
		54	0.59	0.792	1.38	30	

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	16.16	0.113	16.27	30	16.5
		1	16.05	0.226	16.28	30	
		2	16.62	0.325	16.94	30	
		3	16.57	0.414	16.99	30	
		4	15.96	0.573	16.54	30	
		5	15.82	0.711	16.53	30	
		6	15.81	0.779	16.59	30	
		7	15.70	0.841	16.54	30	
2437	6	0	16.67	0.113	16.78	30	17
		1	16.58	0.226	16.81	30	
		2	17.13	0.325	17.45	30	
		3	17.08	0.414	17.50	30	
		4	16.52	0.573	17.09	30	
		5	16.37	0.711	17.08	30	
		6	16.33	0.779	17.10	30	
		7	16.22	0.841	17.06	30	
2462	11	0	16.59	0.113	16.71	30	17
		1	16.51	0.226	16.74	30	
		2	17.02	0.325	17.35	30	
		3	17.00	0.414	17.42	30	
		4	16.38	0.573	16.95	30	
		5	16.23	0.711	16.94	30	
		6	16.19	0.779	16.96	30	
		7	16.11	0.841	16.95	30	
2467	12	0	7.23	0.113	7.34	30	7.5
		1	7.14	0.226	7.37	30	
		2	7.65	0.325	7.98	30	
		3	7.66	0.414	8.07	30	
		4	7.08	0.573	7.65	30	
		5	6.95	0.711	7.66	30	
		6	6.85	0.779	7.63	30	
		7	6.81	0.841	7.65	30	
2472	13	0	1.25	0.113	1.36	30	1
		1	1.08	0.226	1.31	30	
		2	1.58	0.325	1.91	30	
		3	1.52	0.414	1.93	30	
		4	0.94	0.573	1.51	30	
		5	0.81	0.711	1.52	30	
		6	0.64	0.779	1.42	30	
		7	0.67	0.841	1.51	30	

[ANT2]

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	1	18.20	0.047	18.25	30	17.5
		2	18.36	0.036	18.39	30	
		5.5	18.36	0.079	18.44	30	
		11	18.26	0.152	18.41	30	
2437	6	1	17.32	0.047	17.37	30	17.5
		2	17.48	0.036	17.52	30	
		5.5	17.47	0.079	17.55	30	
		11	17.37	0.152	17.52	30	
2462	11	1	17.72	0.047	17.77	30	17.5
		2	17.89	0.036	17.92	30	
		5.5	17.91	0.079	17.99	30	
		11	17.79	0.152	17.95	30	
2467	12	1	8.13	0.047	8.18	30	7
		2	8.28	0.036	8.32	30	
		5.5	8.26	0.079	8.34	30	
		11	8.18	0.152	8.33	30	
2472	13	1	1.56	0.047	1.61	30	0.5
		2	1.55	0.036	1.59	30	
		5.5	1.52	0.079	1.60	30	
		11	1.37	0.152	1.52	30	

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	16.67	0.110	16.78	30	16.5
		9	16.61	0.165	16.77	30	
		12	16.55	0.217	16.77	30	
		18	17.11	0.318	17.43	30	
		24	17.06	0.412	17.47	30	
		36	16.33	0.571	16.90	30	
		48	16.18	0.719	16.90	30	
		54	16.12	0.792	16.92	30	
2437	6	6	16.58	0.110	16.69	30	17
		9	16.54	0.165	16.71	30	
		12	16.50	0.217	16.72	30	
		18	17.02	0.318	17.34	30	
		24	16.98	0.412	17.39	30	
		36	16.52	0.571	17.09	30	
		48	16.36	0.719	17.08	30	
		54	16.28	0.792	17.08	30	
2462	11	6	15.60	0.110	15.71	30	16.5
		9	15.57	0.165	15.73	30	
		12	15.50	0.217	15.71	30	
		18	16.06	0.318	16.38	30	
		24	16.02	0.412	16.43	30	
		36	15.52	0.571	16.09	30	
		48	15.38	0.719	16.10	30	
		54	15.31	0.792	16.10	30	
2467	12	6	7.52	0.110	7.63	30	7.5
		9	7.46	0.165	7.63	30	
		12	7.38	0.217	7.60	30	
		18	7.83	0.318	8.15	30	
		24	7.75	0.412	8.16	30	
		36	7.02	0.571	7.59	30	
		48	6.87	0.719	7.59	30	
		54	6.79	0.792	7.58	30	
2472	13	6	1.12	0.110	1.23	30	1
		9	1.03	0.165	1.20	30	
		12	0.95	0.217	1.17	30	
		18	1.44	0.318	1.76	30	
		24	1.40	0.412	1.81	30	
		36	0.53	0.571	1.10	30	
		48	0.37	0.719	1.09	30	
		54	0.28	0.792	1.07	30	

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	0	16.51	0.113	16.63	30	16.5
		1	16.40	0.226	16.63	30	
		2	16.96	0.325	17.29	30	
		3	16.92	0.414	17.34	30	
		4	16.33	0.573	16.91	30	
		5	16.18	0.711	16.89	30	
		6	16.12	0.779	16.90	30	
		7	16.04	0.841	16.88	30	
2437	6	0	16.43	0.113	16.54	30	17
		1	16.33	0.226	16.56	30	
		2	16.89	0.325	17.21	30	
		3	16.84	0.414	17.26	30	
		4	16.54	0.573	17.12	30	
		5	16.36	0.711	17.07	30	
		6	16.31	0.779	17.09	30	
		7	16.24	0.841	17.08	30	
2462	11	0	16.69	0.113	16.80	30	17
		1	16.60	0.226	16.83	30	
		2	17.17	0.325	17.49	30	
		3	17.15	0.414	17.57	30	
		4	16.80	0.573	17.37	30	
		5	16.64	0.711	17.35	30	
		6	16.60	0.779	17.38	30	
		7	16.53	0.841	17.37	30	
2467	12	0	7.29	0.113	7.40	30	7.5
		1	7.20	0.226	7.43	30	
		2	7.68	0.325	8.01	30	
		3	7.62	0.414	8.03	30	
		4	7.01	0.573	7.58	30	
		5	6.92	0.711	7.63	30	
		6	6.82	0.779	7.60	30	
		7	6.76	0.841	7.60	30	
2472	13	0	0.88	0.113	0.99	30	1
		1	0.78	0.226	1.01	30	
		2	1.31	0.325	1.64	30	
		3	1.25	0.414	1.66	30	
		4	0.58	0.573	1.15	30	
		5	0.45	0.711	1.16	30	
		6	0.34	0.779	1.12	30	
		7	0.22	0.841	1.06	30	

[MIMO]

802.11g Mode		Rate (Mbps)	ANT1 Measured Power(dBm)	ANT2 Measured Power(dBm)	MIMO Measured Power(dBm)	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.						
2412	1	6	16.44	16.78	19.62	30	16.5
		9	16.41	16.77	19.61	30	
		12	16.44	16.77	19.62	30	
		18	17.09	17.43	20.27	30	
		24	17.14	17.47	20.32	30	
		36	16.58	16.90	19.75	30	
		48	16.60	16.90	19.76	30	
		54	16.59	16.92	19.77	30	
		6	16.90	16.69	19.81	30	
2437	6	9	16.91	16.71	19.82	30	17
		12	16.91	16.72	19.83	30	
		18	17.58	17.34	20.47	30	
		24	17.60	17.39	20.51	30	
		36	17.03	17.09	20.07	30	
		48	17.06	17.08	20.08	30	
		54	17.07	17.08	20.08	30	
		6	16.33	15.71	19.04	30	
		9	16.33	15.73	19.05	30	
2462	11	12	16.34	15.71	19.05	30	16.5
		18	16.95	16.38	19.68	30	
		24	17.01	16.43	19.74	30	
		36	16.44	16.09	19.28	30	
		48	16.46	16.10	19.29	30	
		54	16.47	16.10	19.30	30	
		6	7.51	7.63	10.58	30	
		9	7.51	7.63	10.58	30	
		12	7.57	7.60	10.59	30	
2467	12	18	8.10	8.15	11.13	30	7.5
		24	8.21	8.16	11.20	30	
		36	7.66	7.59	10.64	30	
		48	7.65	7.59	10.63	30	
		54	7.64	7.58	10.62	30	
		6	1.41	1.23	4.33	30	
		9	1.49	1.20	4.35	30	
		12	1.50	1.17	4.35	30	
		18	2.04	1.76	4.91	30	
2472	13	24	2.17	1.81	5.01	30	1
		36	1.39	1.10	4.26	30	
		48	1.52	1.09	4.32	30	
		54	1.38	1.07	4.24	30	

802.11n Mode		Rate (Mbps)	ANT1	ANT2	MIMO	Limit (dBm)	Power Level Setting
Frequency [MHz]	Channel No.		Measured Power(dBm)	Measured Power(dBm)	Measured Power(dBm)		
2412	1	0	16.27	16.63	19.46	30	16.5
		1	16.28	16.63	19.47	30	
		2	16.94	17.29	20.13	30	
		3	16.99	17.34	20.17	30	
		4	16.54	16.91	19.74	30	
		5	16.53	16.89	19.72	30	
		6	16.59	16.90	19.76	30	
		7	16.54	16.88	19.72	30	
2437	6	0	16.78	16.54	19.67	30	17
		1	16.81	16.56	19.69	30	
		2	17.45	17.21	20.34	30	
		3	17.50	17.26	20.39	30	
		4	17.09	17.12	20.12	30	
		5	17.08	17.07	20.09	30	
		6	17.10	17.09	20.11	30	
		7	17.06	17.08	20.08	30	
2462	11	0	16.71	16.80	19.77	30	17
		1	16.74	16.83	19.79	30	
		2	17.35	17.49	20.43	30	
		3	17.42	17.57	20.50	30	
		4	16.95	17.37	20.18	30	
		5	16.94	17.35	20.16	30	
		6	16.96	17.38	20.19	30	
		7	16.95	17.37	20.17	30	
2467	12	0	7.34	7.40	10.38	30	7.5
		1	7.37	7.43	10.41	30	
		2	7.98	8.01	11.00	30	
		3	8.07	8.03	11.06	30	
		4	7.65	7.58	10.63	30	
		5	7.66	7.63	10.66	30	
		6	7.63	7.60	10.62	30	
		7	7.65	7.60	10.64	30	
2472	13	0	1.36	0.99	4.19	30	1
		1	1.31	1.01	4.17	30	
		2	1.91	1.64	4.78	30	
		3	1.93	1.66	4.81	30	
		4	1.51	1.15	4.35	30	
		5	1.52	1.16	4.35	30	
		6	1.42	1.12	4.28	30	
		7	1.51	1.06	4.30	30	

9.4 POWER SPECTRAL DENSITY

[ANT1]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD(dBm) (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	0.625	0.079	0.704	8
	2437	6	0.392	0.079	0.471	8
	2462	11	0.004	0.079	0.083	8
	2467	12	-9.449	0.152	-9.297	8
	2472	13	-15.499	0.079	-15.420	8
802.11g	2412	1	-0.917	0.412	-0.505	8
	2437	6	-0.449	0.412	-0.037	8
	2462	11	-1.090	0.412	-0.678	8
	2467	12	-9.125	0.412	-8.713	8
	2472	13	-15.911	0.412	-15.499	8
802.11n	2412	1	-0.573	0.414	-0.159	8
	2437	6	-0.596	0.414	-0.182	8
	2462	11	-0.661	0.414	-0.247	8
	2467	12	-9.170	0.414	-8.756	8
	2472	13	-15.637	0.414	-15.223	8

[ANT2]

Mode	Frequency (MHz)	Channel No.	Test Result			
			Measured PSD (dBm)	Duty Cycle Factor	Measured PSD(dBm) + Duty Cycle Factor	Limit (dBm)
802.11b	2412	1	0.849	0.079	0.928	8
	2437	6	0.133	0.079	0.212	8
	2462	11	0.185	0.079	0.264	8
	2467	12	-9.188	0.079	-9.109	8
	2472	13	-15.369	0.047	-15.322	8
802.11g	2412	1	-0.506	0.412	-0.094	8
	2437	6	-0.669	0.412	-0.257	8
	2462	11	-1.538	0.412	-1.126	8
	2467	12	-8.793	0.412	-8.381	8
	2472	13	-15.390	0.412	-14.978	8
802.11n	2412	1	-0.004	0.414	0.410	8
	2437	6	-0.331	0.414	0.083	8
	2462	11	-0.337	0.414	0.077	8
	2467	12	-9.623	0.414	-9.209	8
	2472	13	-15.695	0.414	-15.281	8

[MIMO]

Mode	Frequency (MHz)	Channel No.	Test Result			
			ANT 1 Measured PSD(dBm) + Duty Cycle Factor	ANT 2 Measured PSD(dBm) + Duty Cycle Factor	MIMO Result (dBm)	Limit (dBm)
802.11g	2412	1	-0.505	-0.094	2.715	8
	2437	6	-0.037	-0.257	2.864	
	2462	11	-0.678	-1.126	2.114	
	2467	12	-8.713	-8.381	-5.534	
	2472	13	-15.499	-14.978	-12.221	
802.11n	2412	1	-0.159	0.410	3.145	8
	2437	6	-0.182	0.083	2.963	
	2462	11	-0.247	0.077	2.928	
	2467	12	-8.756	-9.209	-5.966	
	2472	13	-15.223	-15.281	-12.242	

Note :

1. Spectrum reading values are not plot data.

The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss + Cable loss

3. 20.47 dB is offset for 2.4 GHz Band.

■ Test Plots [ANT1]


Power Spectral Density (802.11b-CH 1)



Power Spectral Density (802.11g-CH 6)



Power Spectral Density (802.11n_HT20 -CH 1)

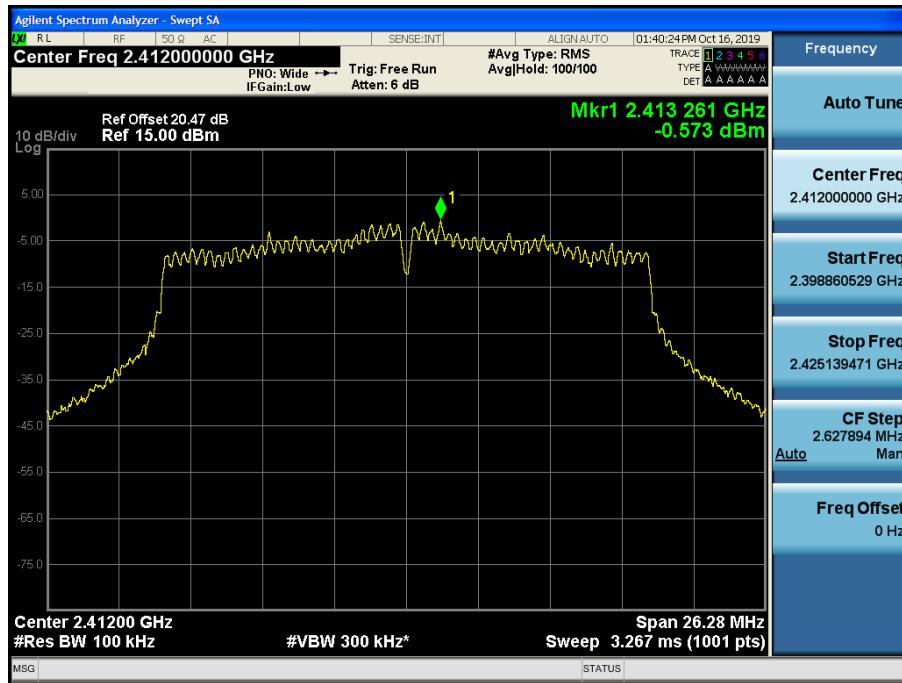

■ Test Plots [ANT2]

Power Spectral Density (802.11b-CH 1)



Power Spectral Density (802.11g-CH 1)



Power Spectral Density (802.11n_HT20 -CH 1)

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.


In order to simplify the report, attached plots were only the worst case channel and data rate.

[ANT1] **Test Plots(BandEdge)**


Band Edge (802.11b-CH1)

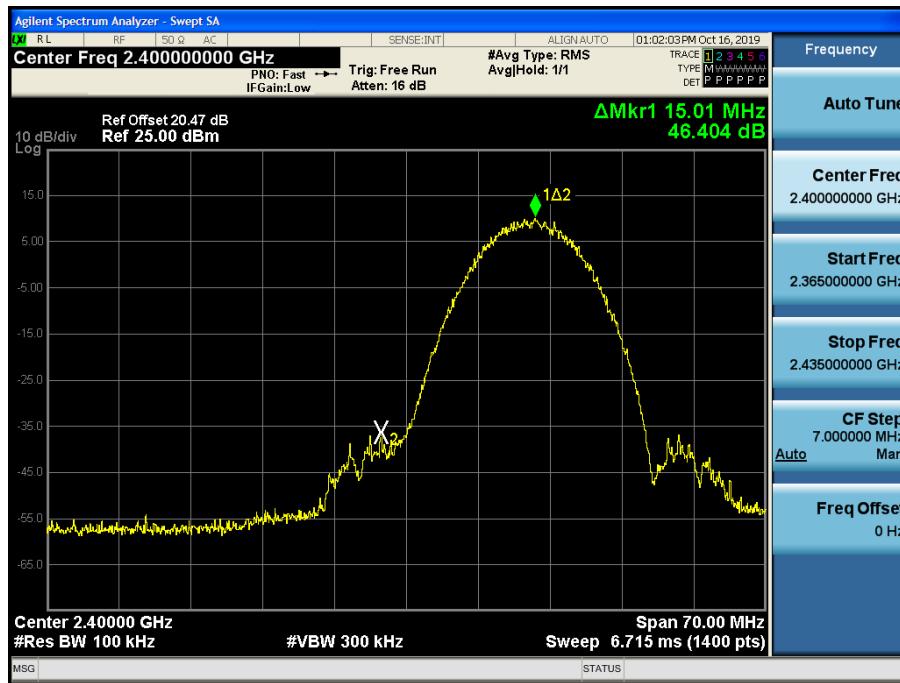

Band Edge (802.11b-CH11)

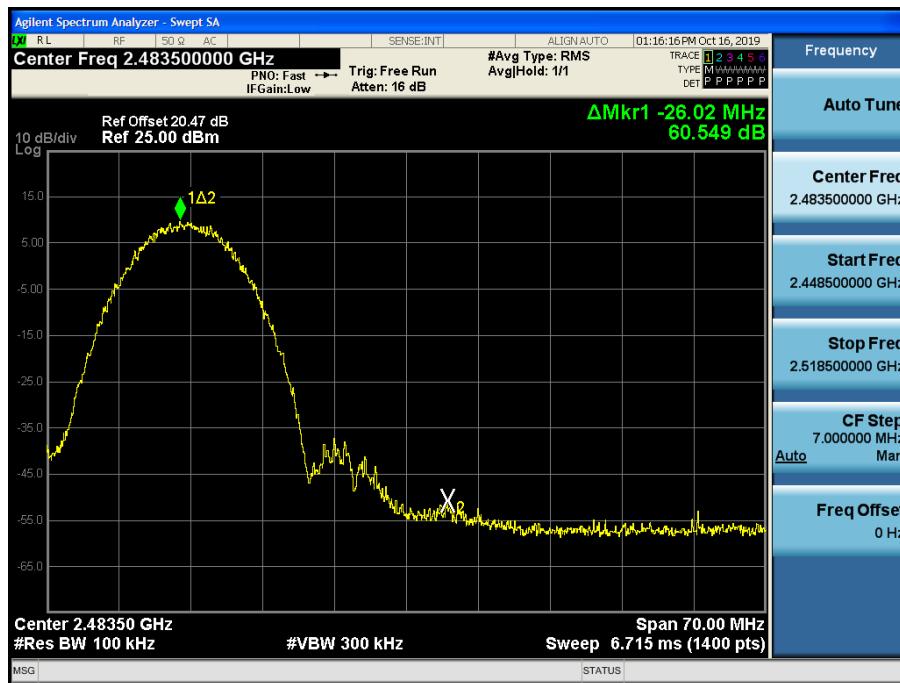


Band Edge (802.11b-CH12)

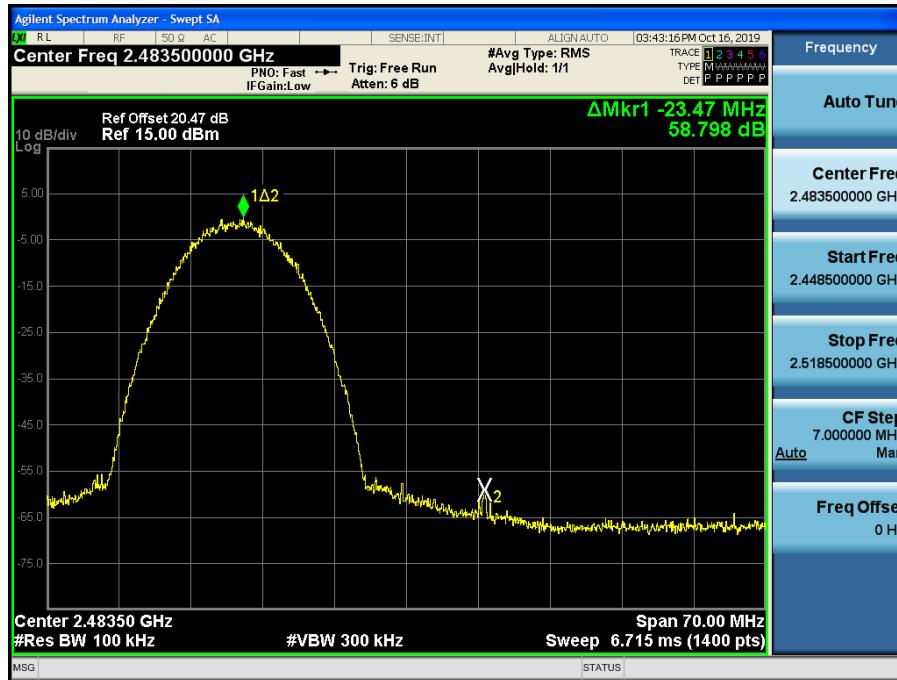


Band Edge (802.11b-CH13)



Band Edge (802.11g-CH1)

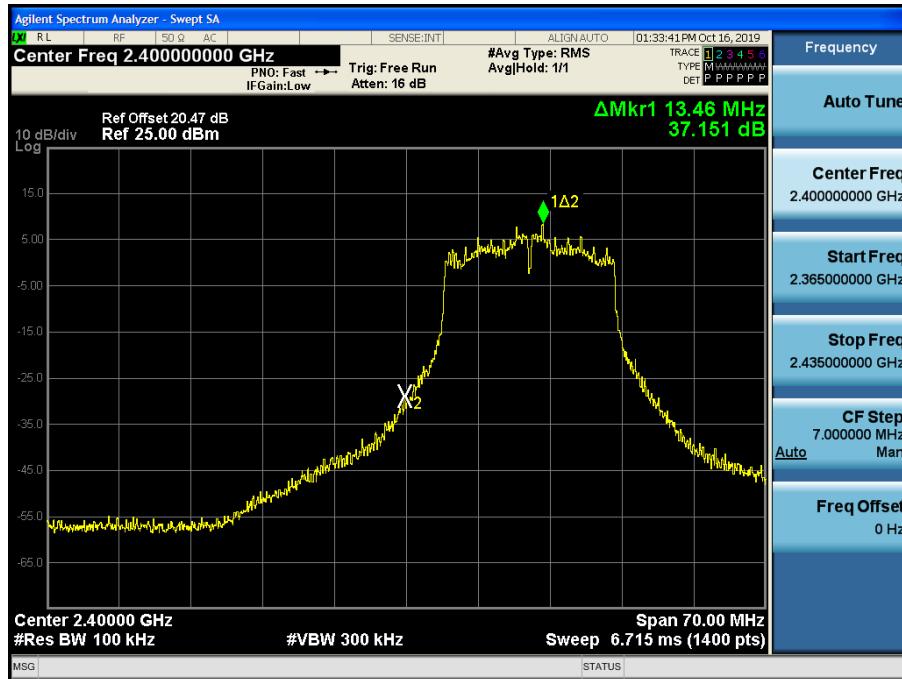


Band Edge (802.11g-CH11)

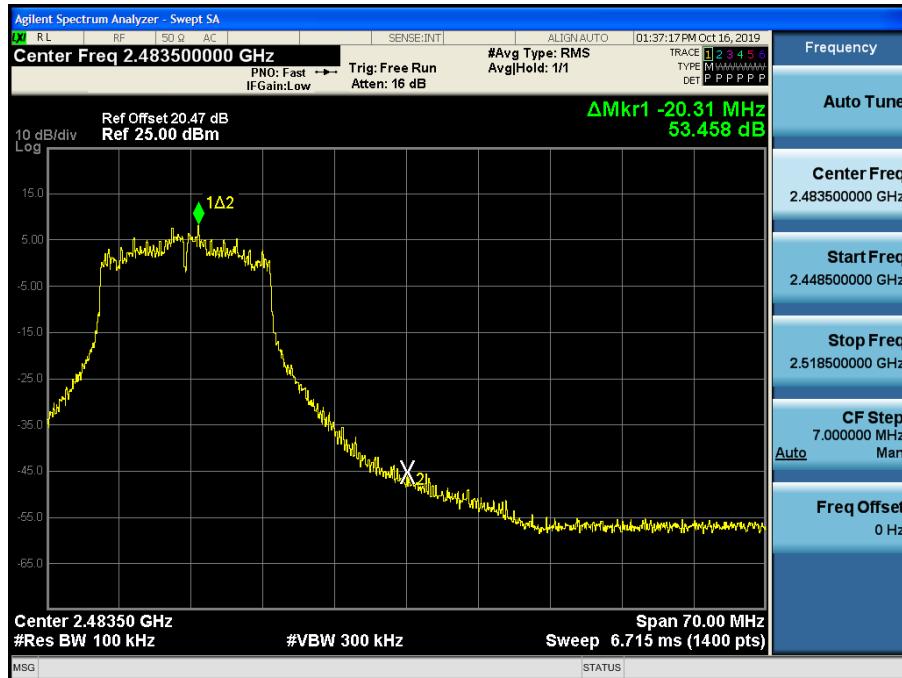


Band Edge (802.11g-CH12)




Band Edge (802.11g-CH13)

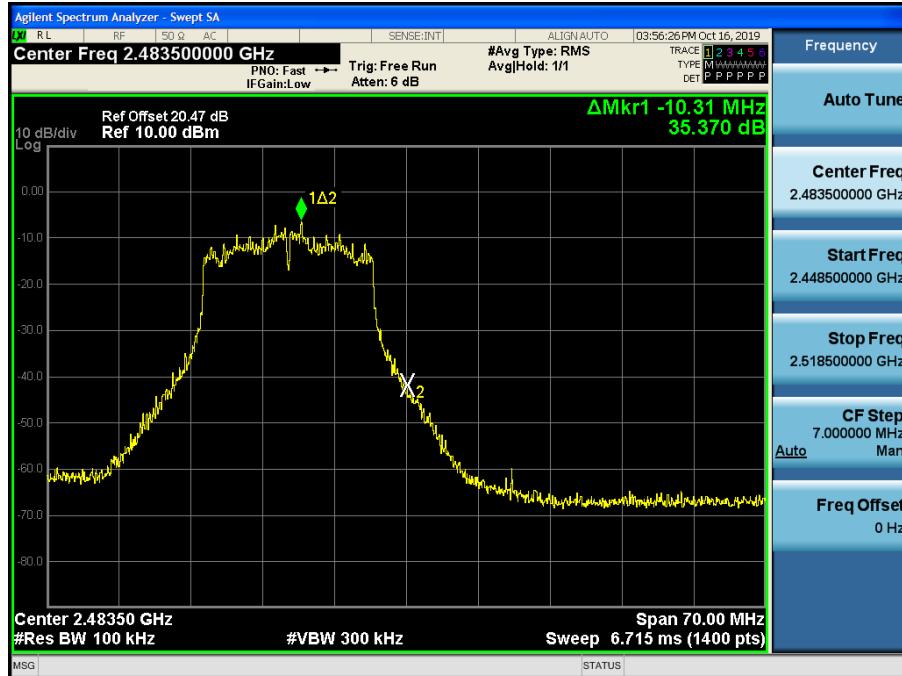

Band Edge (802.11n_HT20 -CH1)

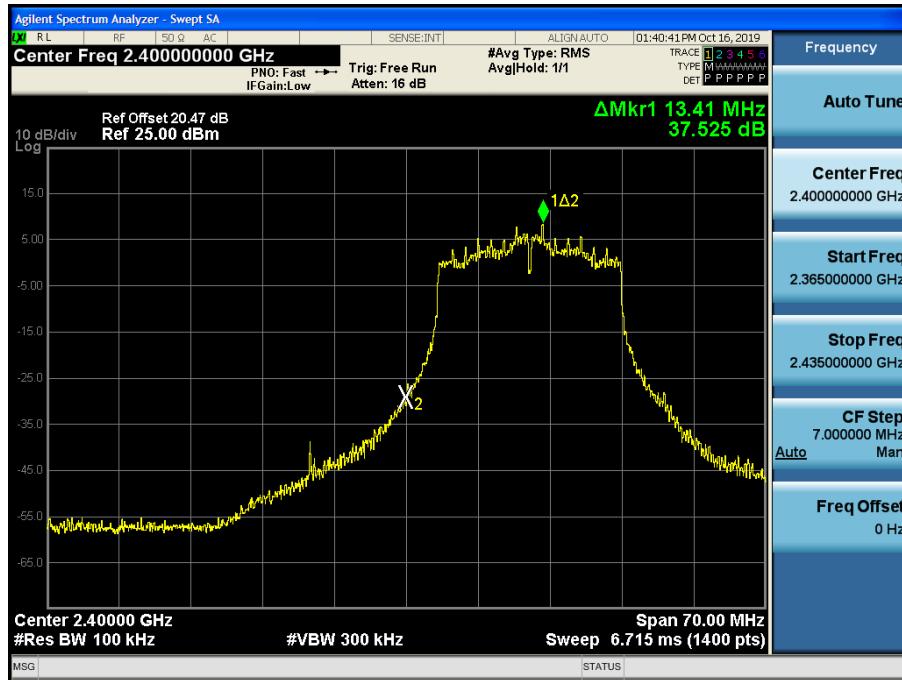

Band Edge (802.11n_HT20 -CH11)

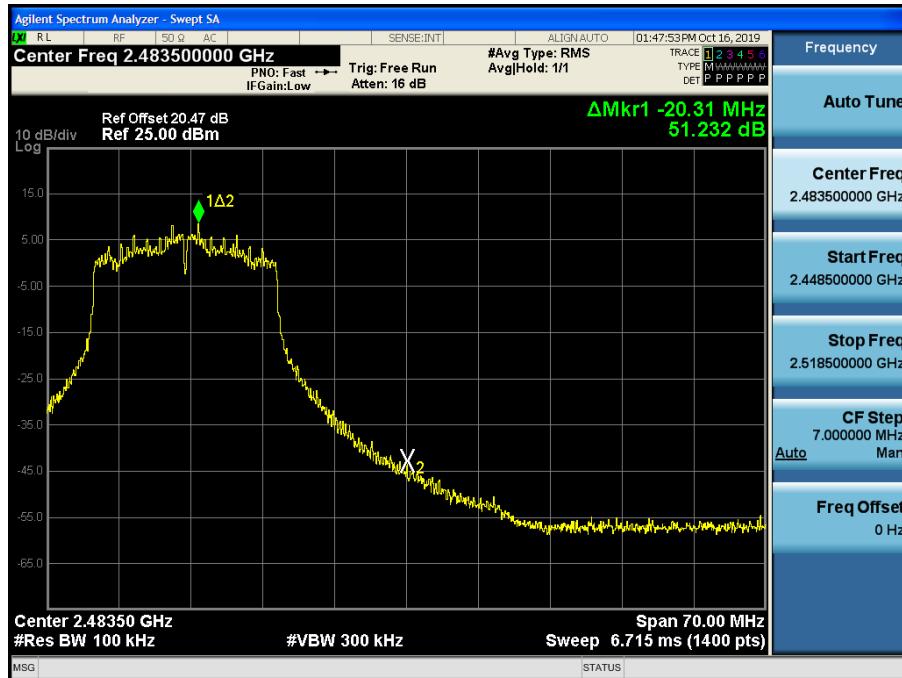

Band Edge (802.11n_HT20 -CH12)




Band Edge (802.11n_HT20 -CH13)



Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

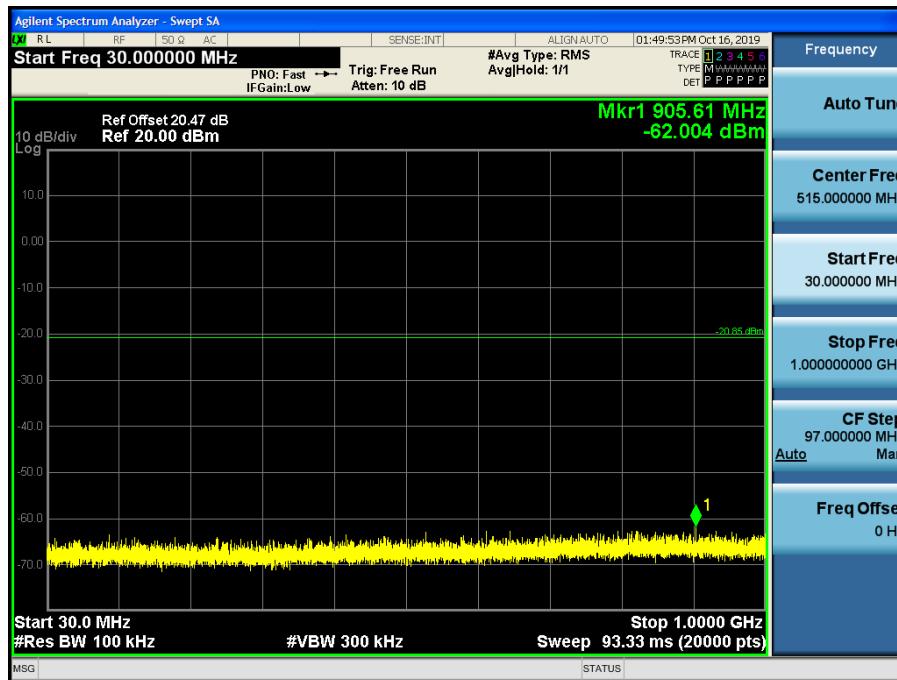


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

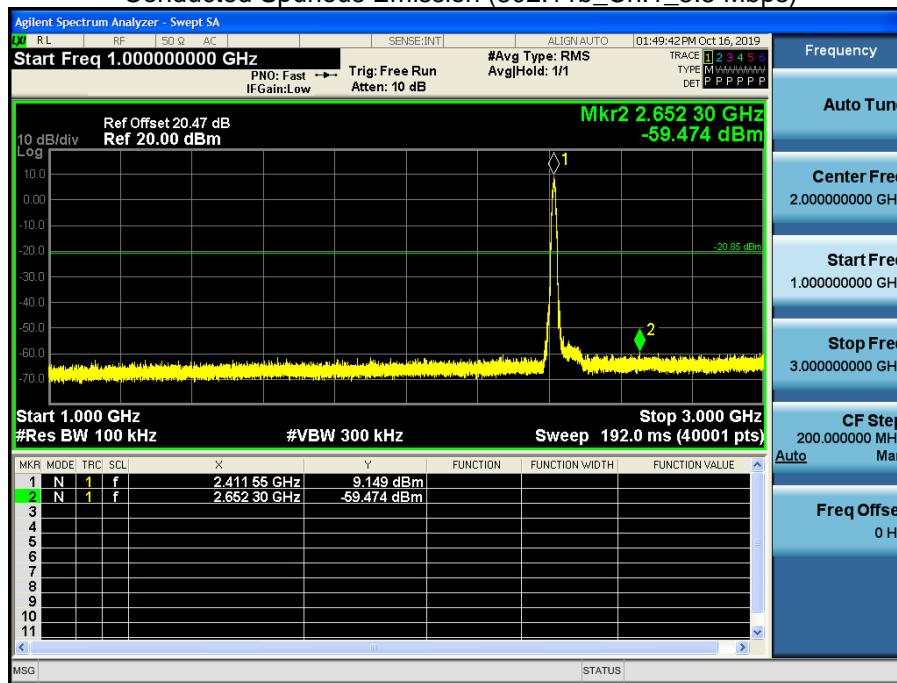


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

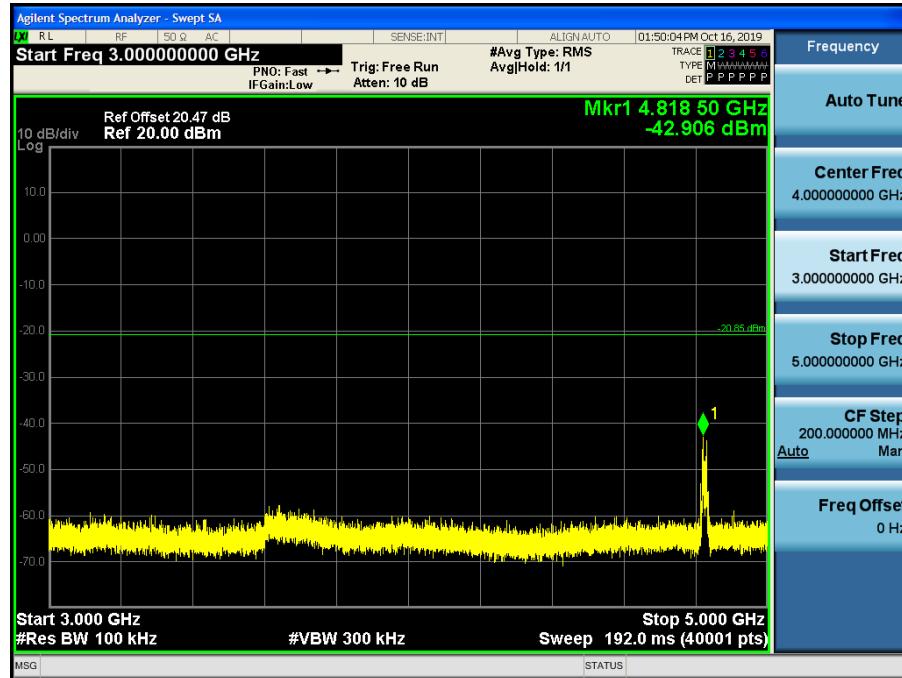


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

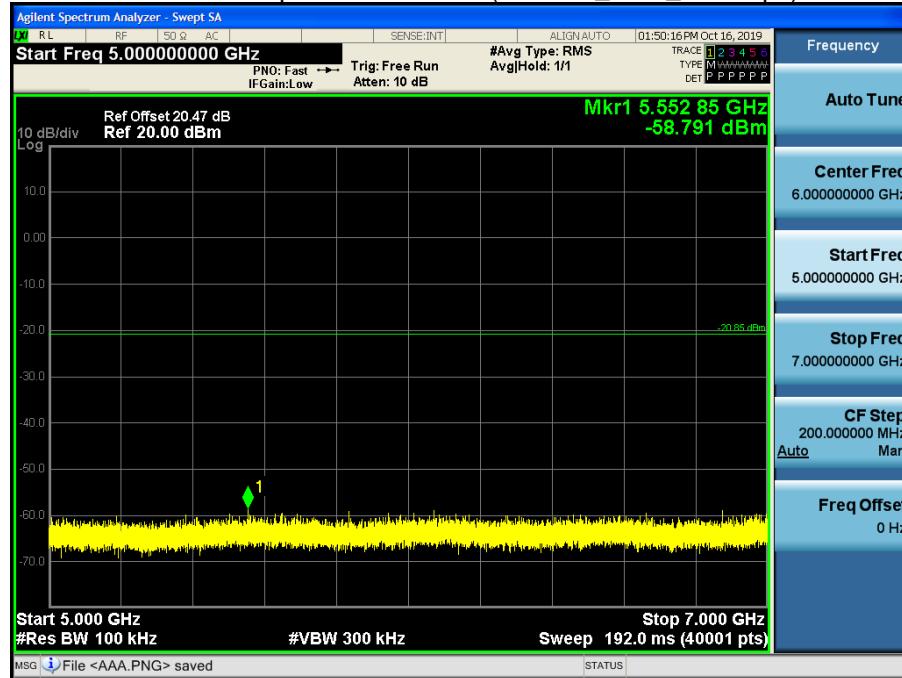


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

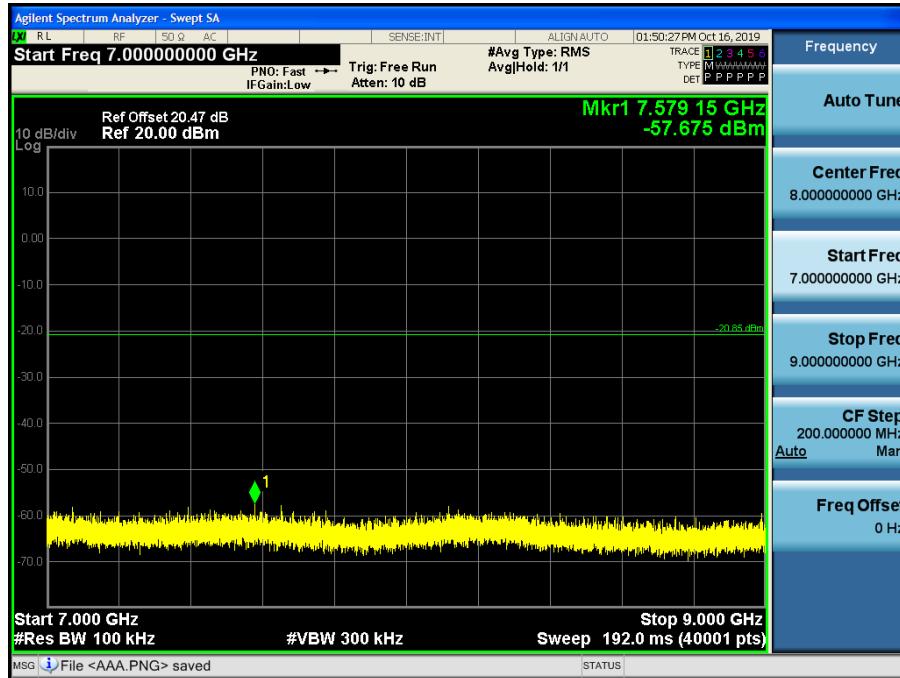


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

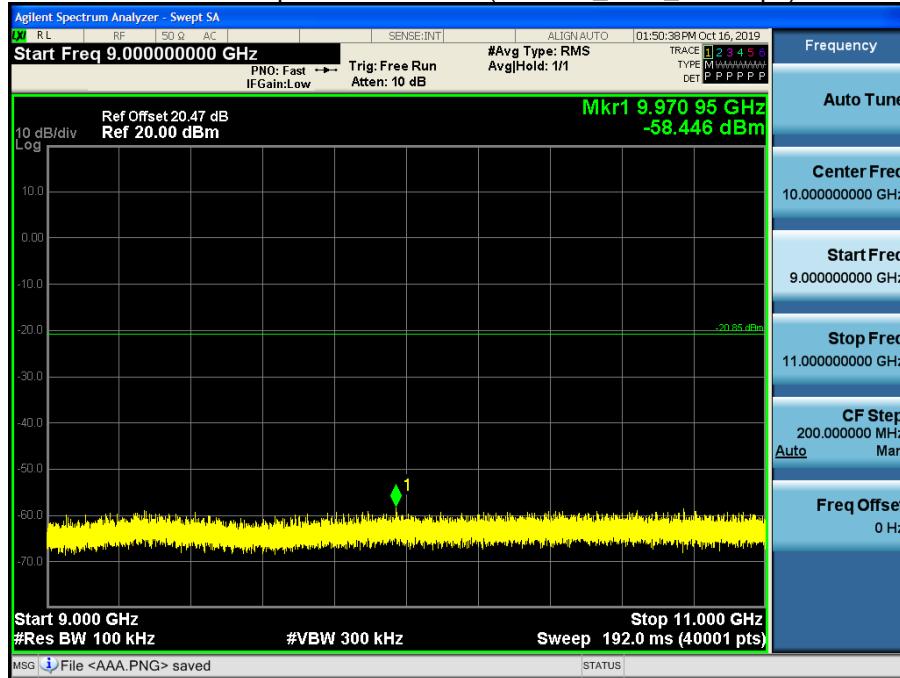


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

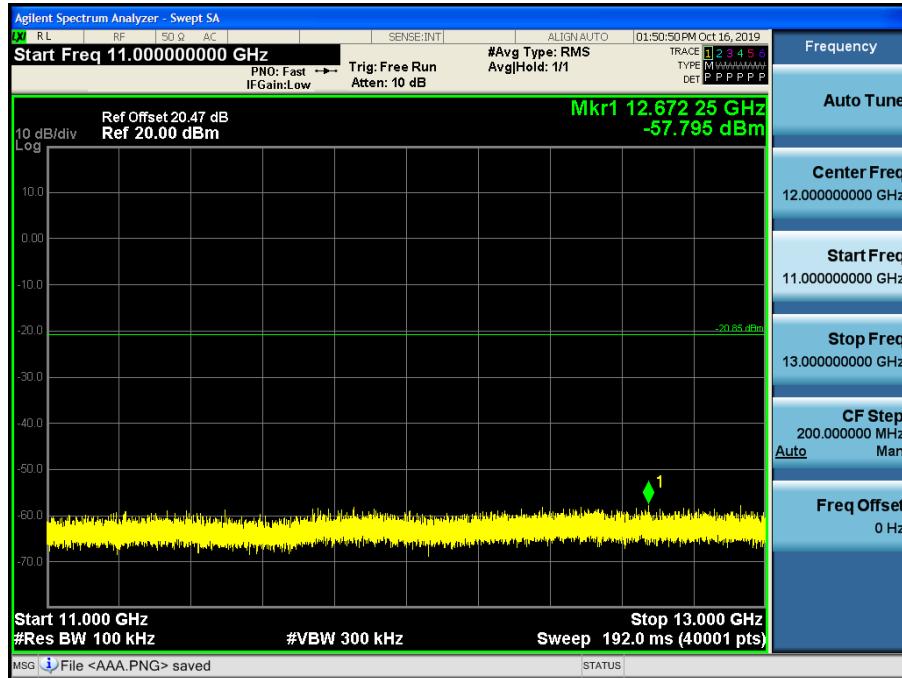


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

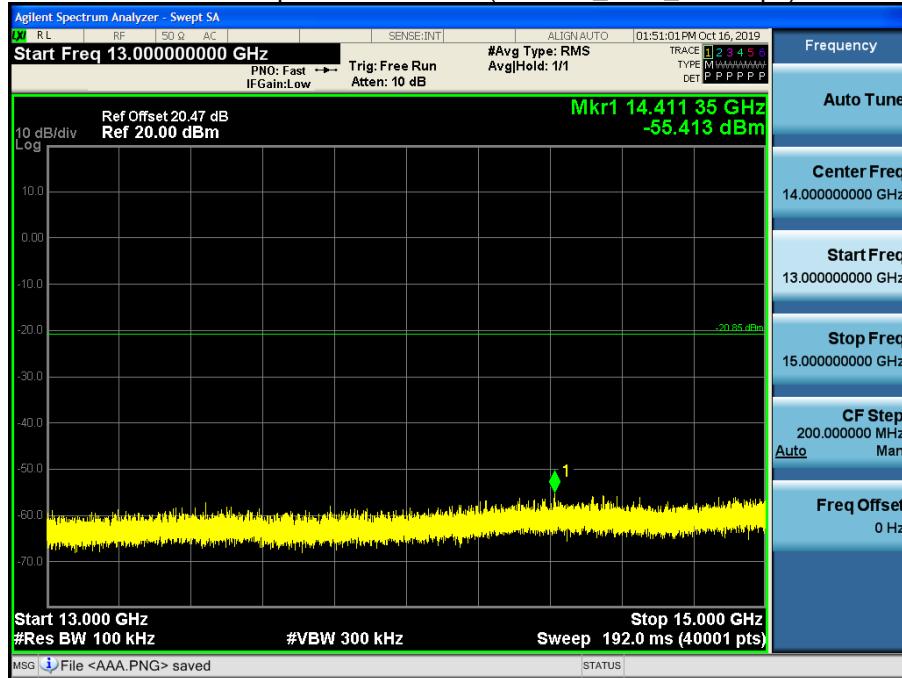


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

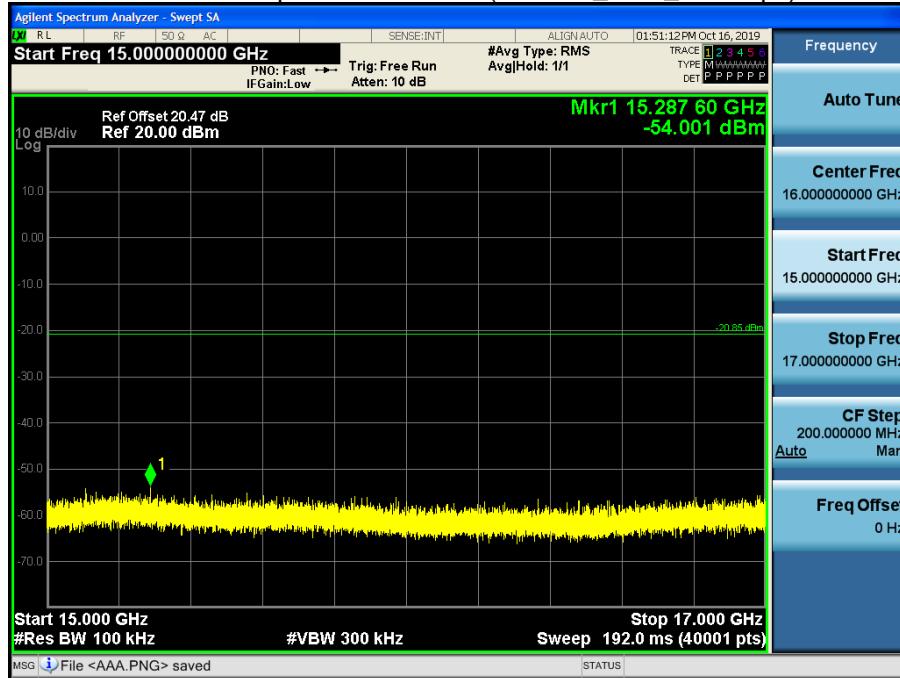


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

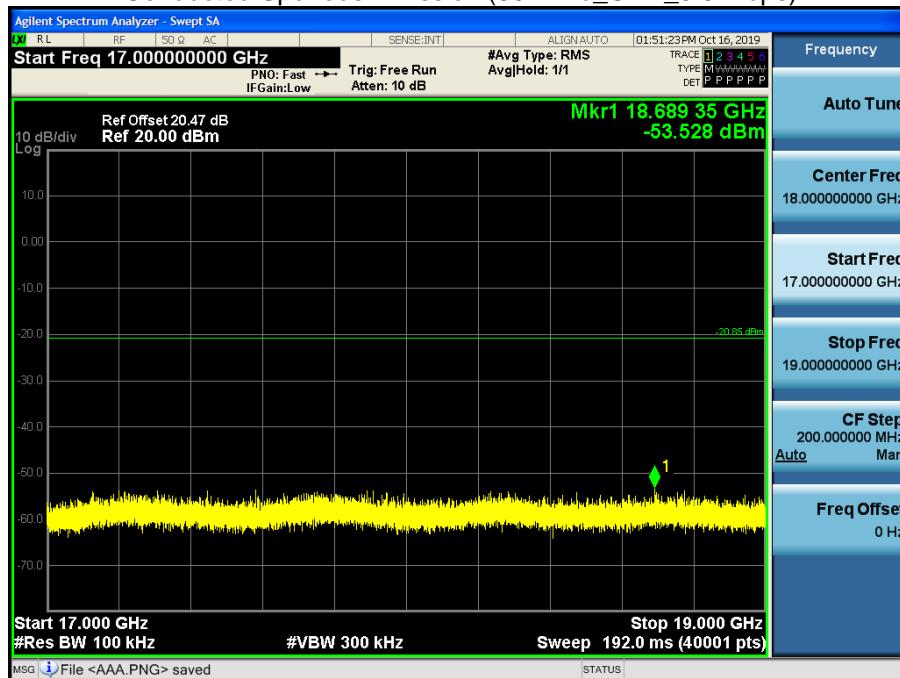


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

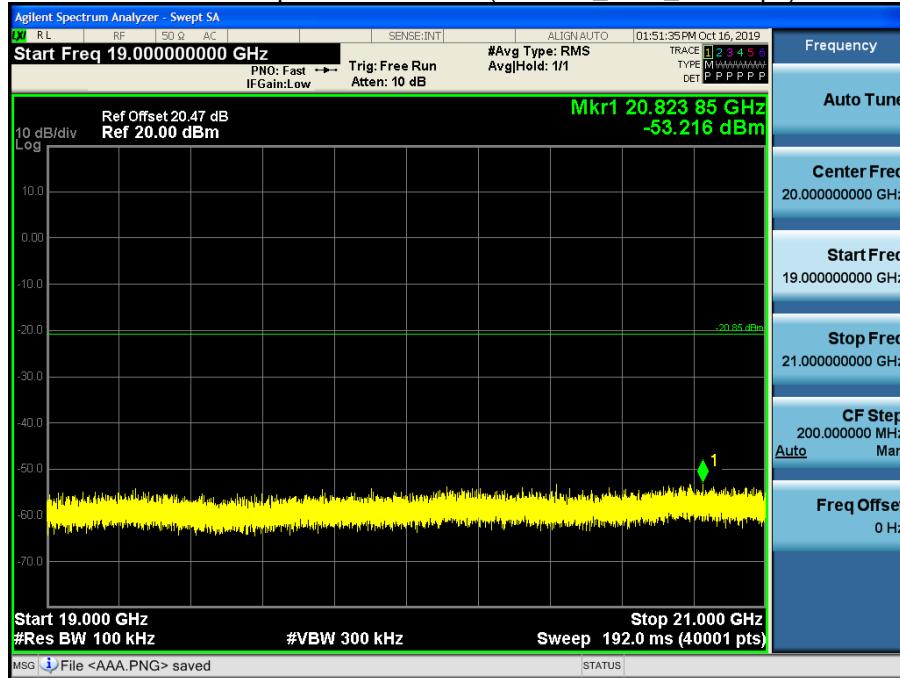


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

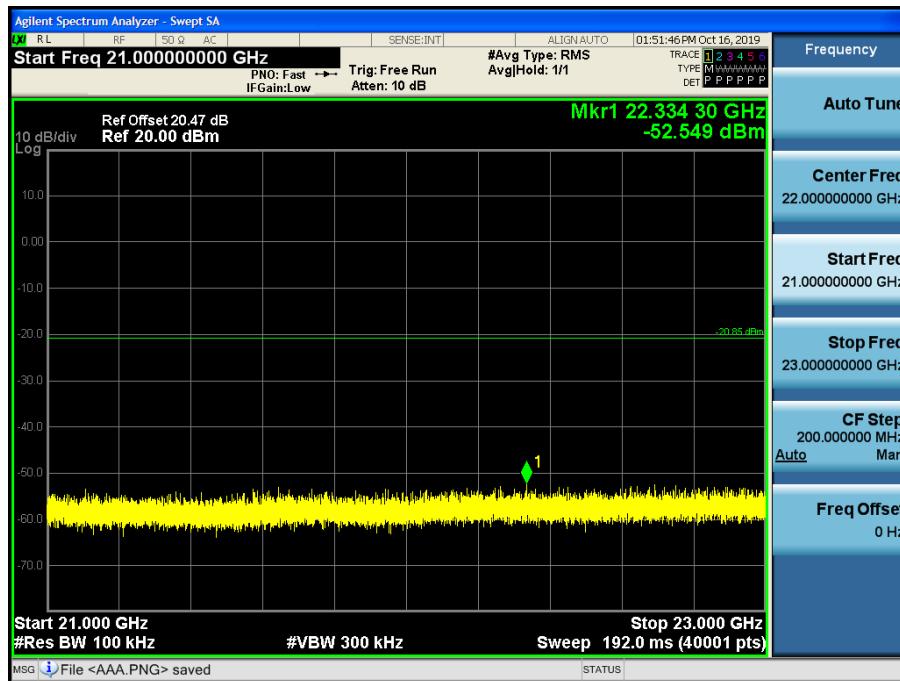

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.1_5.5 Mbps)

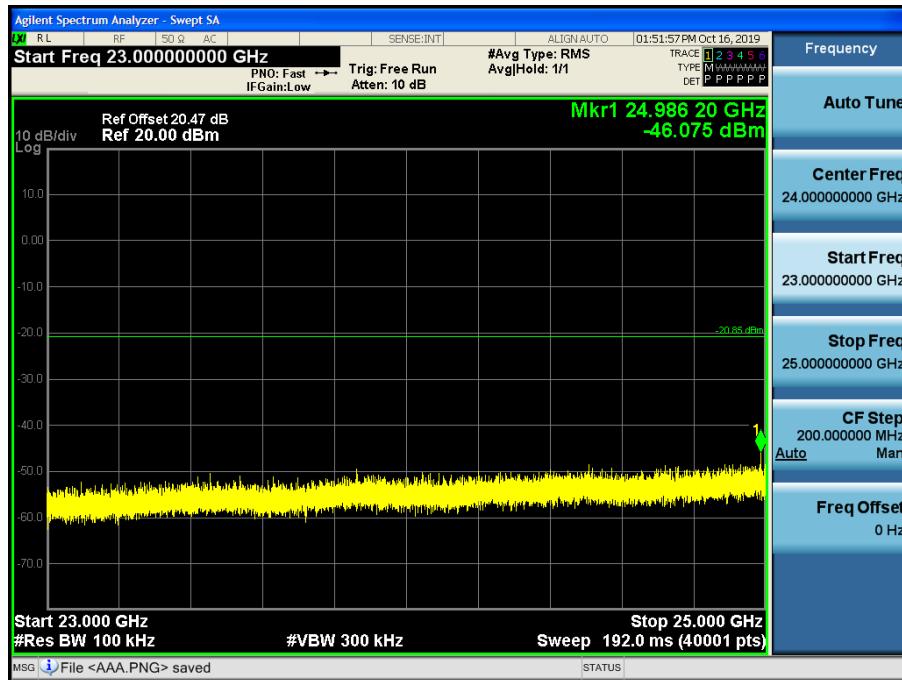

[ANT2] **Test Plots(BandEdge)**


Band Edge (802.11b-CH1)




Band Edge (802.11b-CH11)



Band Edge (802.11b-CH12)

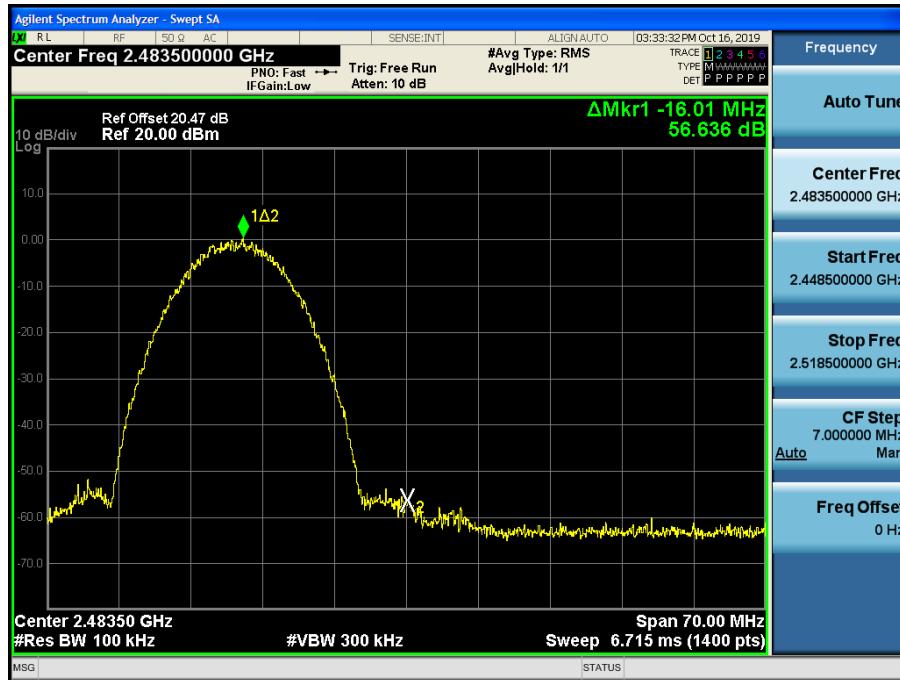

Band Edge (802.11b-CH13)

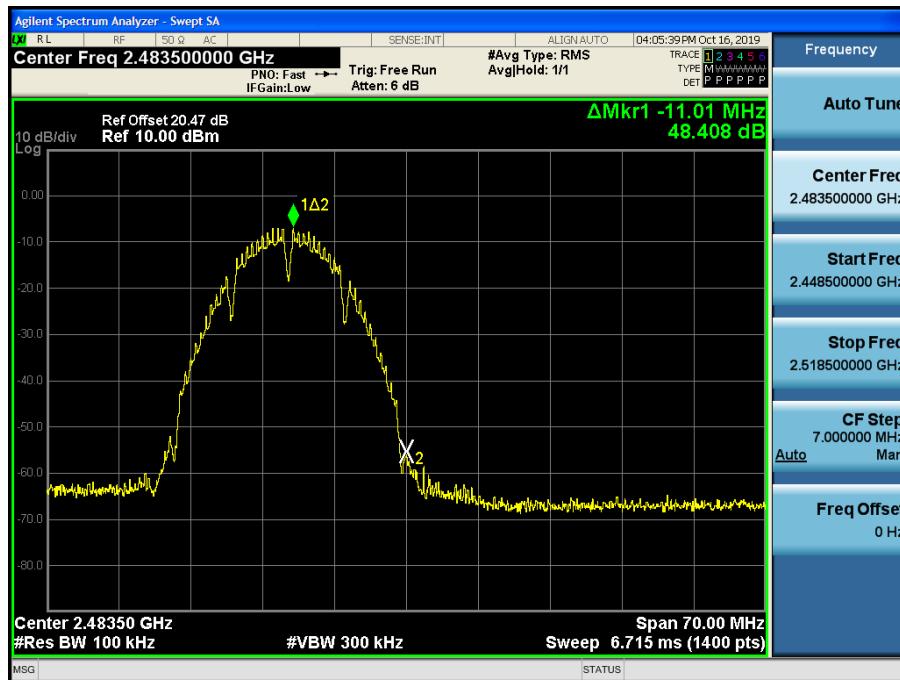


Band Edge (802.11g-CH1)



Band Edge (802.11g-CH11)



Band Edge (802.11g-CH12)

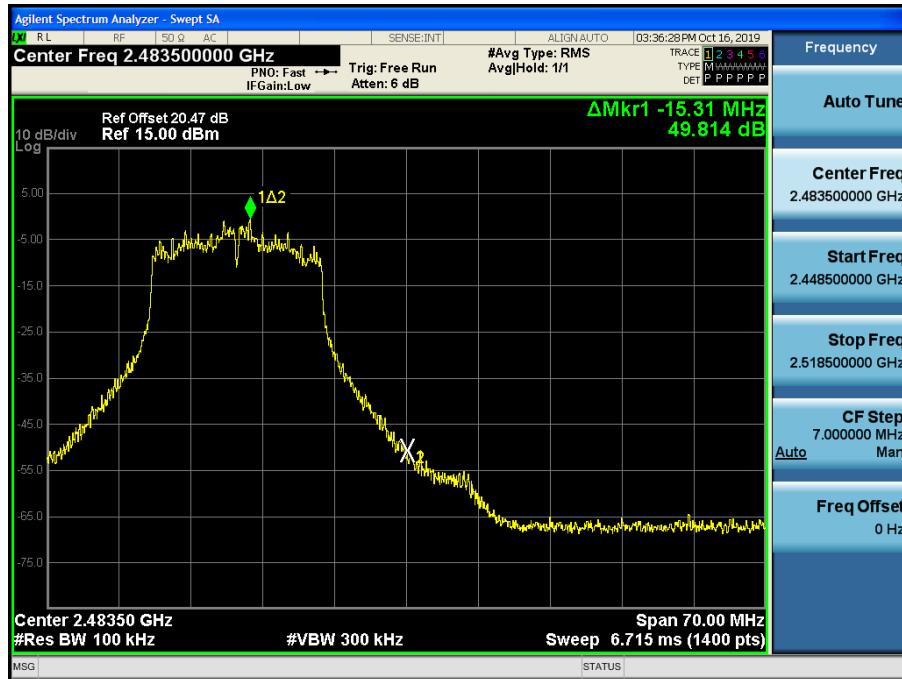

Band Edge (802.11g-CH13)



Band Edge (802.11n_HT20 -CH1)



Band Edge (802.11n_HT20 -CH11)



Band Edge (802.11n_HT20 -CH12)




Band Edge (802.11n_HT20 -CH13)



Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

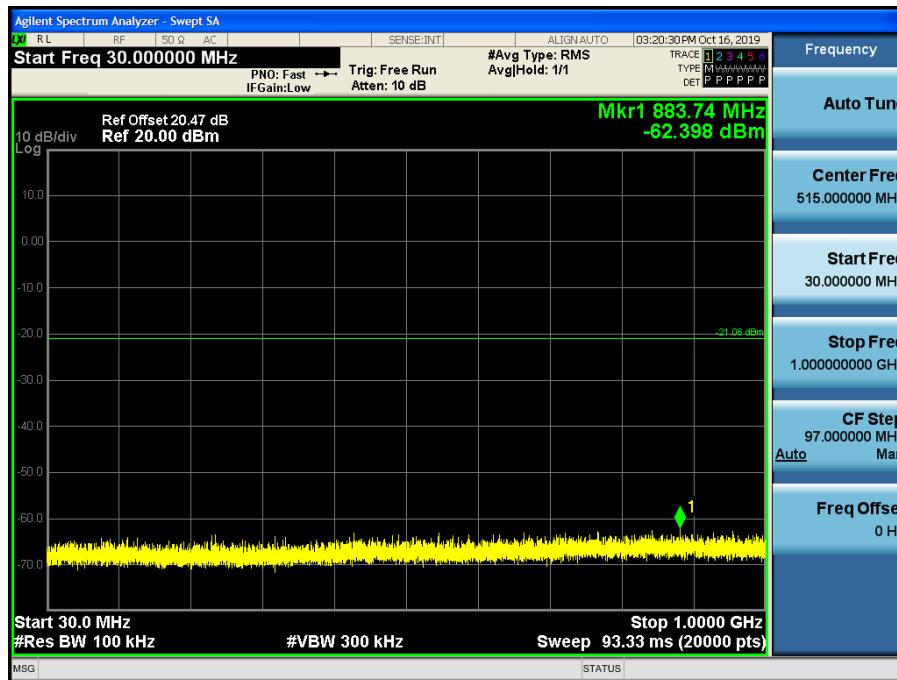


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

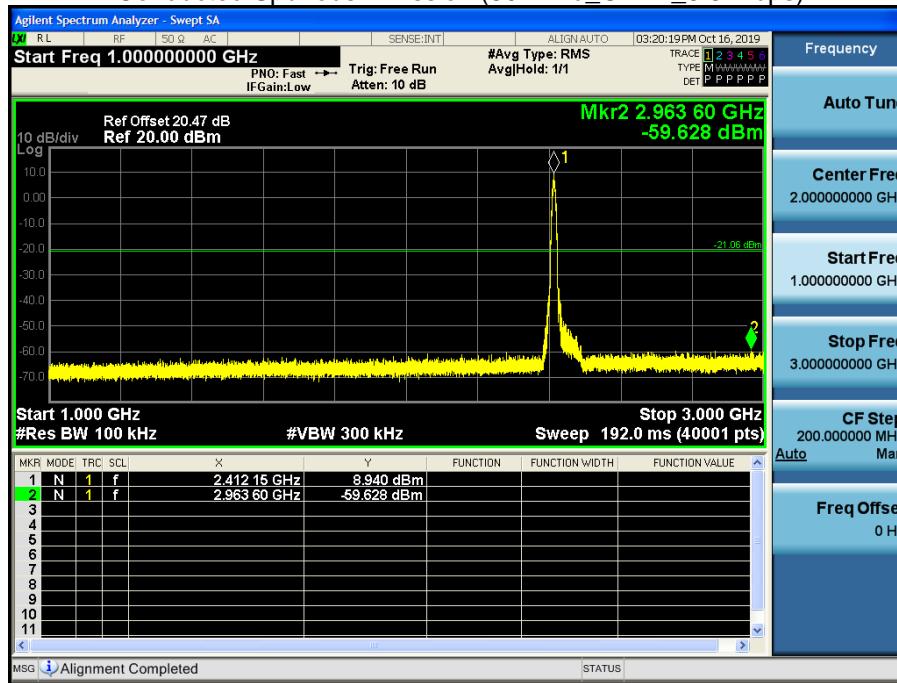


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

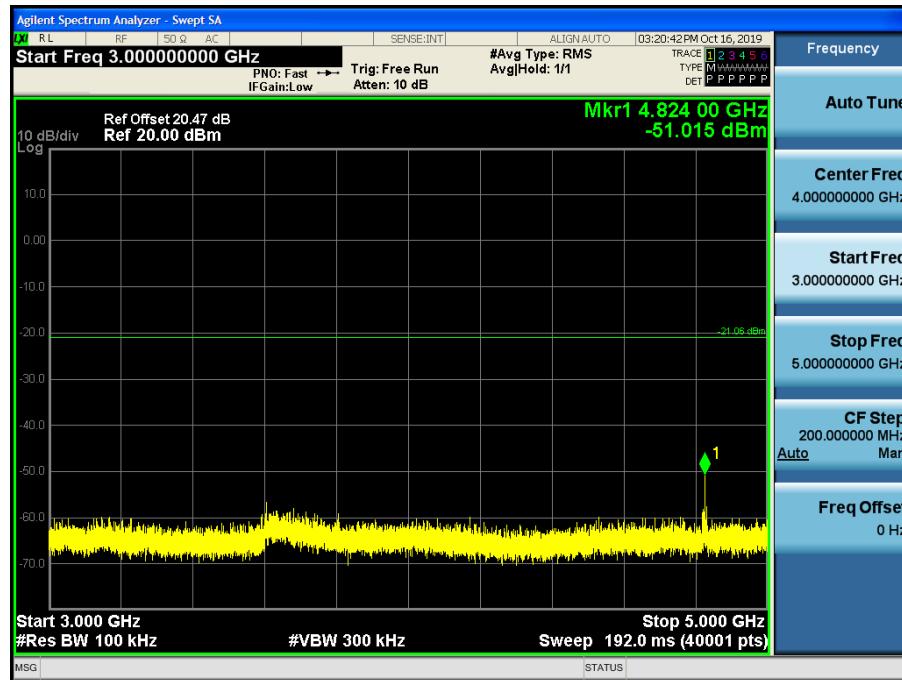


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

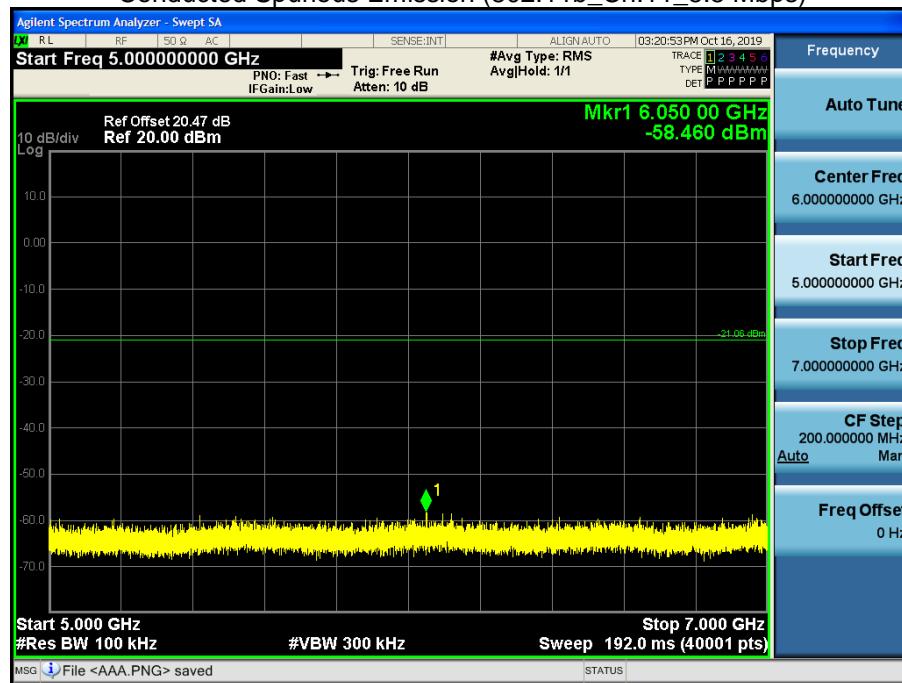


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

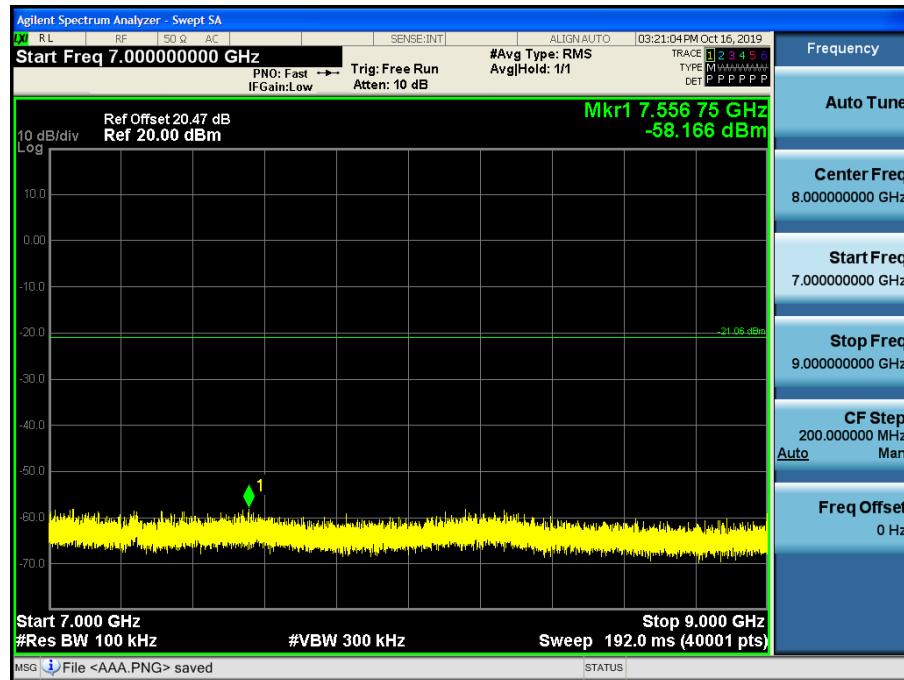


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

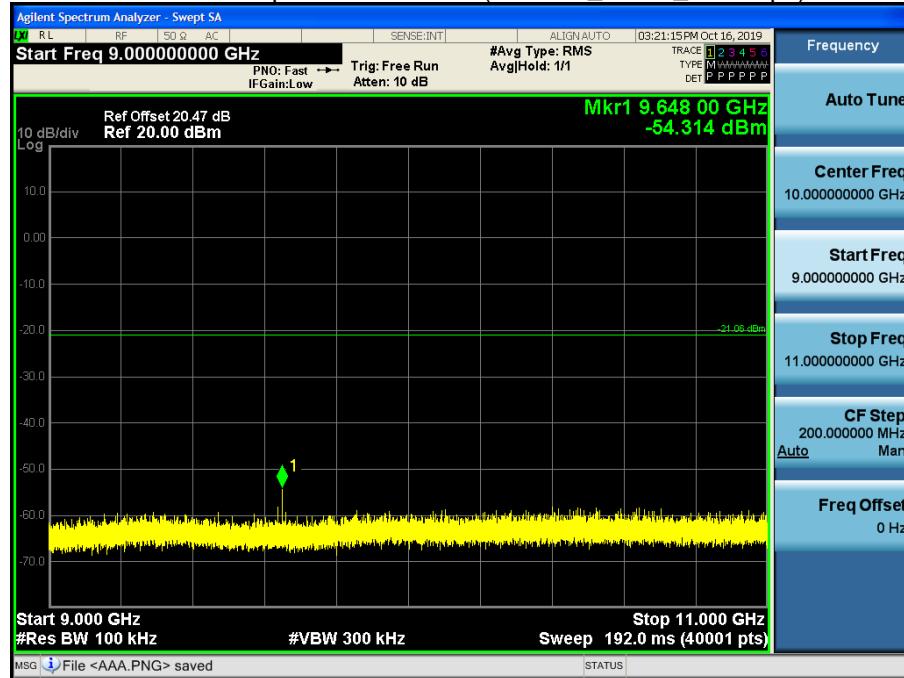


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

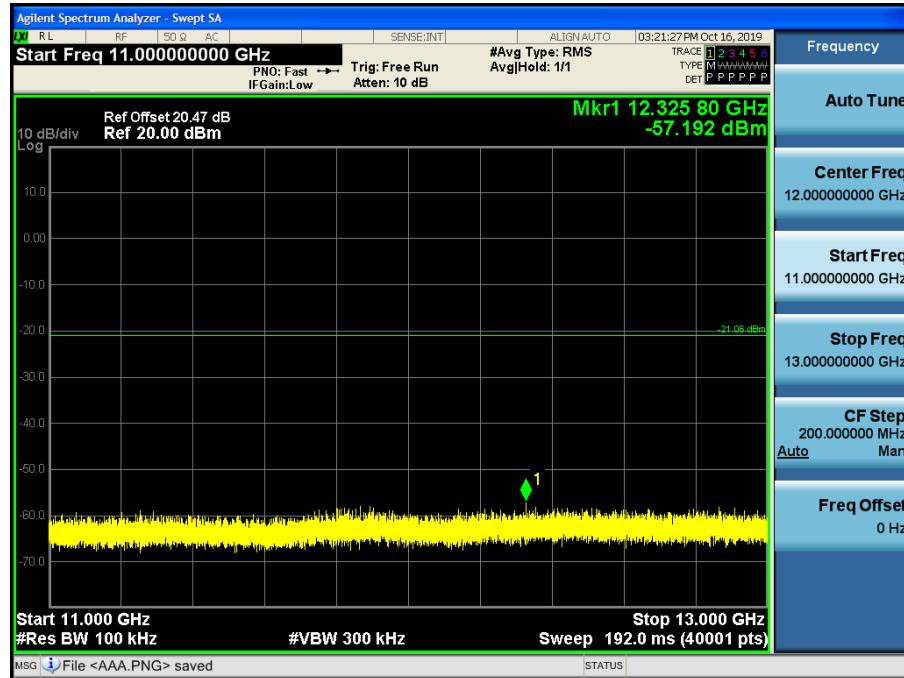


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

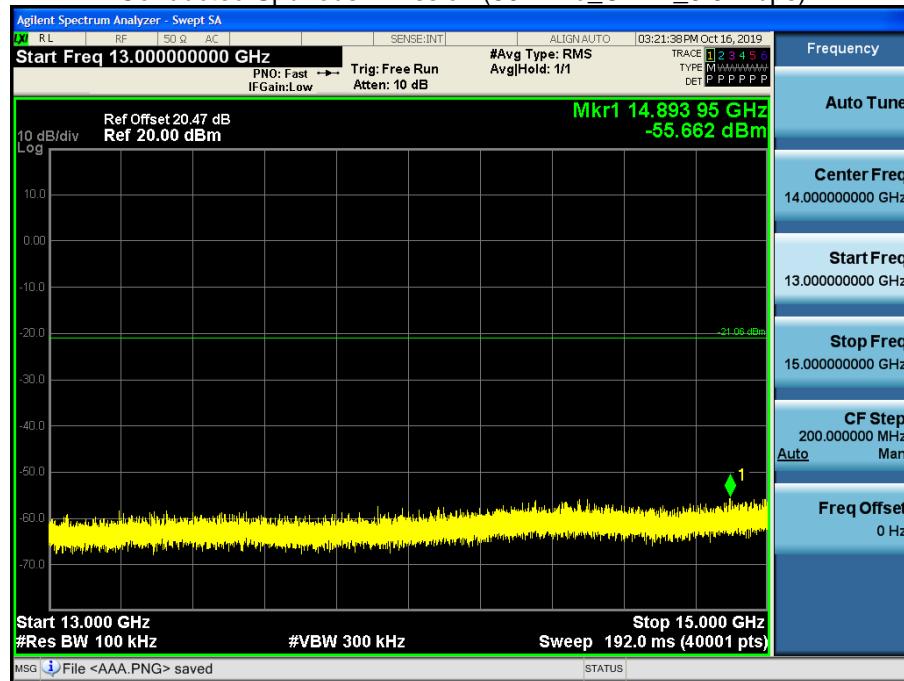


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

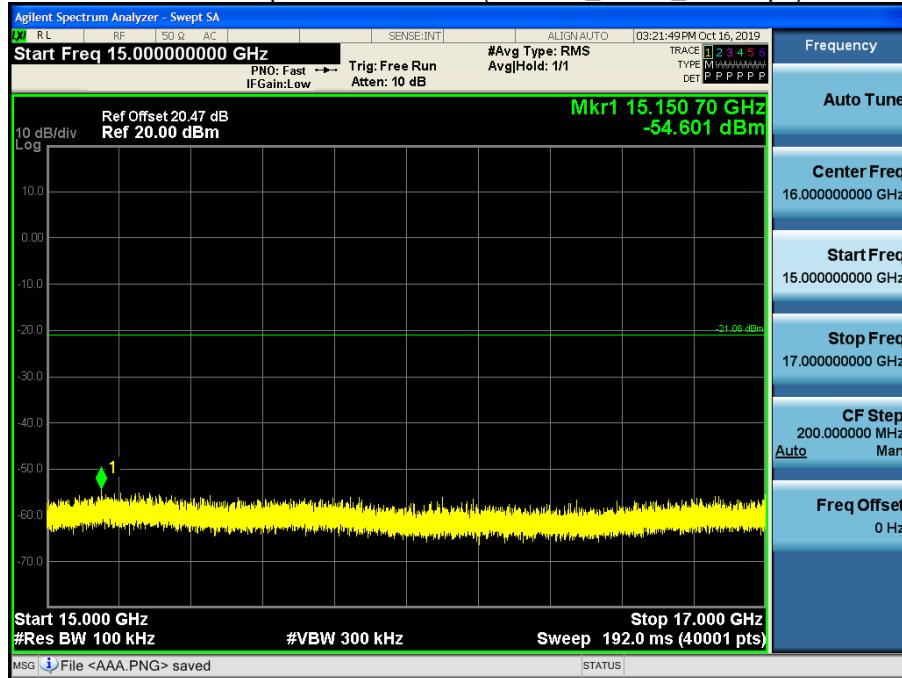


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

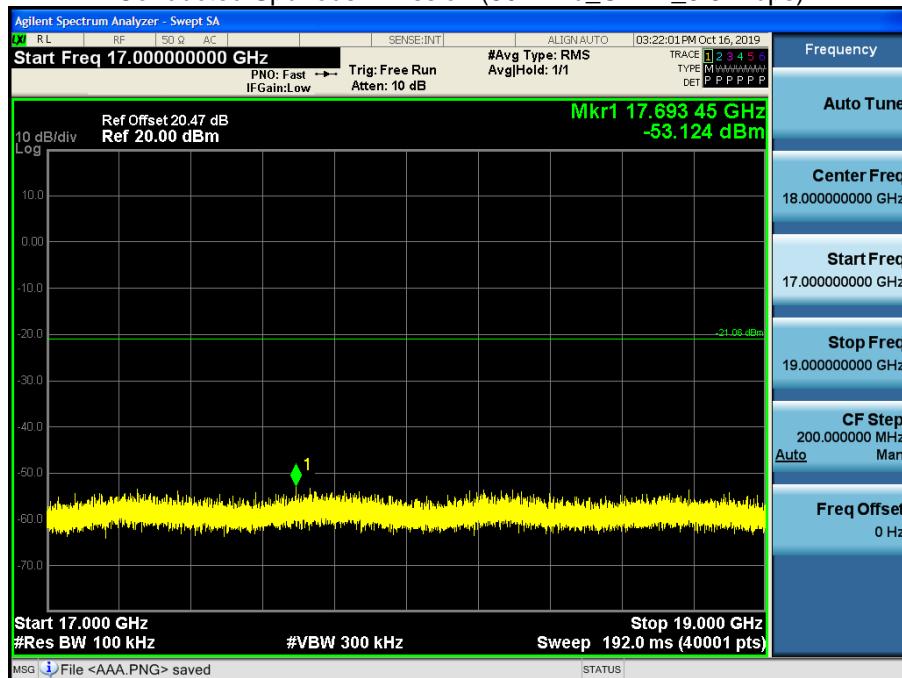


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

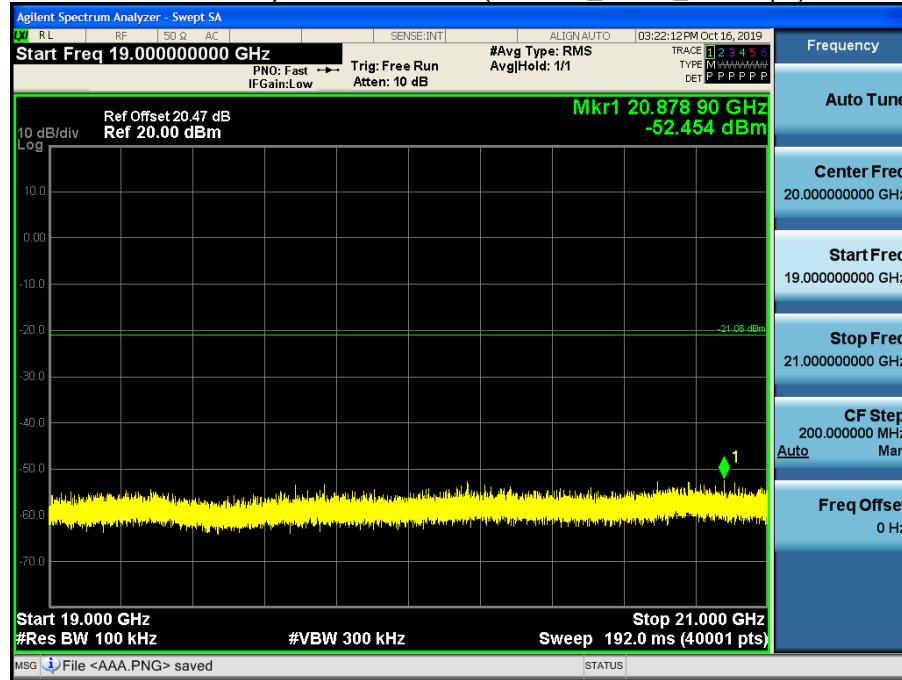


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

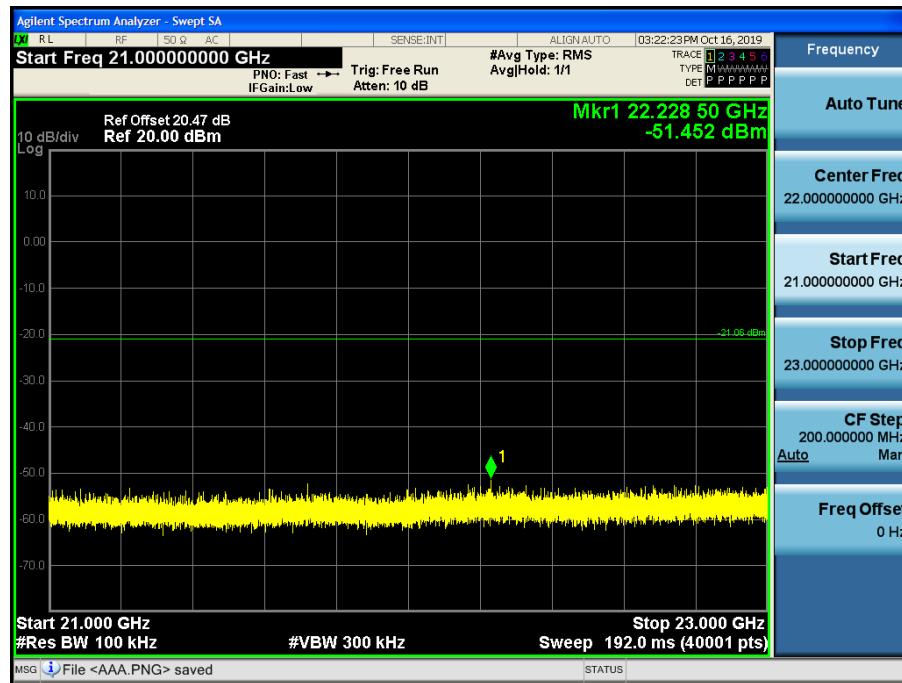

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11b_Ch.11_5.5 Mbps)

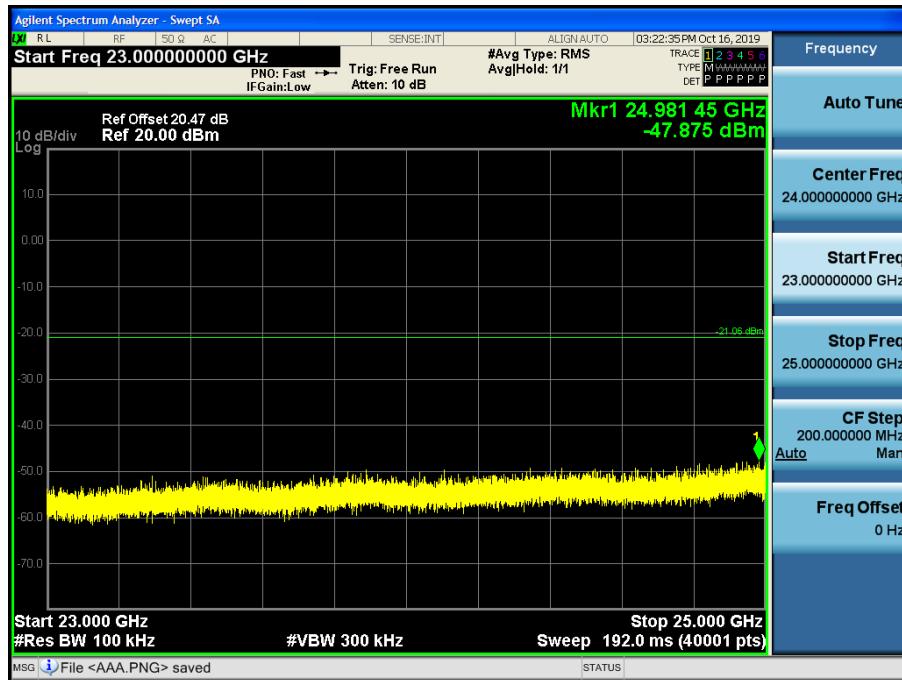

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

[ANT1_SISO]**Frequency Range : Above 1 GHz**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	55.46	1.95	V	57.41	73.98	16.57	PK
4824	48.67	1.95	V	50.62	53.98	3.36	AV
7236	49.84	9.86	V	59.70	73.98	14.28	PK
7236	37.96	9.86	V	47.82	53.98	6.16	AV
4824	55.57	1.95	H	57.52	73.98	16.46	PK
4824	48.97	1.95	H	50.92	53.98	3.06	AV
7236	49.90	9.86	H	59.76	73.98	14.22	PK
7236	38.05	9.86	H	47.91	53.98	6.07	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	54.81	2.33	V	57.14	73.98	16.84	PK
4874	47.31	2.33	V	49.64	53.98	4.34	AV
7311	49.58	10.14	V	59.72	73.98	14.26	PK
7311	37.42	10.14	V	47.56	53.98	6.42	AV
4874	55.10	2.33	H	57.43	73.98	16.55	PK
4874	47.75	2.33	H	50.08	53.98	3.90	AV
7311	50.57	10.14	H	60.71	73.98	13.27	PK
7311	37.97	10.14	H	48.11	53.98	5.87	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	53.88	2.28	V	56.16	73.98	17.82	PK
4924	47.92	2.28	V	50.20	53.98	3.78	AV
7386	49.11	9.81	V	58.92	73.98	15.06	PK
7386	37.22	9.81	V	47.03	53.98	6.95	AV
4924	54.56	2.28	H	56.84	73.98	17.14	PK
4924	48.35	2.28	H	50.63	53.98	3.35	AV
7386	49.26	9.81	H	59.07	73.98	14.91	PK
7386	37.26	9.81	H	47.07	53.98	6.91	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	50.11	2.21	V	52.32	73.98	21.66	PK
4934	38.16	2.21	V	40.37	53.98	13.61	AV
7401	48.76	9.78	V	58.54	73.98	15.44	PK
7401	36.59	9.78	V	46.37	53.98	7.61	AV
4934	50.61	2.21	H	52.82	73.98	21.16	PK
4934	38.59	2.21	H	40.80	53.98	13.18	AV
7401	49.77	9.78	H	59.55	73.98	14.43	PK
7401	37.65	9.78	H	47.43	53.98	6.55	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	49.74	2.35	V	52.09	73.98	21.89	PK
4944	38.50	2.35	V	40.85	53.98	13.13	AV
7416	49.33	9.80	V	59.13	73.98	14.85	PK
7416	37.12	9.80	V	46.92	53.98	7.06	AV
4944	50.77	2.35	H	53.12	73.98	20.86	PK
4944	38.64	2.35	H	40.99	53.98	12.99	AV
7416	50.06	9.80	H	59.86	73.98	14.12	PK
7416	37.87	9.80	H	47.67	53.98	6.31	AV

[ANT2_SISO]**Frequency Range : Above 1 GHz**

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.41	1.95	V	53.36	73.98	20.62	PK
4824	41.23	1.95	V	43.18	53.98	10.80	AV
7236	50.13	9.86	V	59.99	73.98	13.99	PK
7236	37.90	9.86	V	47.76	53.98	6.22	AV
4824	51.02	1.95	H	52.97	73.98	21.01	PK
4824	39.89	1.95	H	41.84	53.98	12.14	AV
7236	49.79	9.86	H	59.65	73.98	14.33	PK
7236	37.52	9.86	H	47.38	53.98	6.60	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.99	2.33	V	54.32	73.98	19.66	PK
4874	42.56	2.33	V	44.89	53.98	9.09	AV
7311	50.05	10.14	V	60.19	73.98	13.79	PK
7311	37.65	10.14	V	47.79	53.98	6.19	AV
4874	50.41	2.33	H	52.74	73.98	21.24	PK
4874	41.82	2.33	H	44.15	53.98	9.83	AV
7311	49.85	10.14	H	59.99	73.98	13.99	PK
7311	36.88	10.14	H	47.02	53.98	6.96	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.91	2.28	V	54.19	73.98	19.79	PK
4924	41.26	2.28	V	43.54	53.98	10.44	AV
7386	49.10	9.81	V	58.91	73.98	15.07	PK
7386	37.22	9.81	V	47.03	53.98	6.95	AV
4924	51.16	2.28	H	53.44	73.98	20.54	PK
4924	40.99	2.28	H	43.27	53.98	10.71	AV
7386	48.60	9.81	H	58.41	73.98	15.57	PK
7386	37.05	9.81	H	46.86	53.98	7.12	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	52.72	2.21	V	54.93	73.98	19.05	PK
4934	44.09	2.21	V	46.30	53.98	7.68	AV
7401	49.33	9.78	V	59.11	73.98	14.87	PK
7401	37.46	9.78	V	47.24	53.98	6.74	AV
4934	51.63	2.21	H	53.84	73.98	20.14	PK
4934	44.02	2.21	H	46.23	53.98	7.75	AV
7401	48.38	9.78	H	58.16	73.98	15.82	PK
7401	37.05	9.78	H	46.83	53.98	7.15	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	51.25	2.35	V	53.60	73.98	20.38	PK
4944	42.69	2.35	V	45.04	53.98	8.94	AV
7416	50.66	9.80	V	60.46	73.98	13.52	PK
7416	37.65	9.80	V	47.45	53.98	6.53	AV
4944	50.18	2.35	H	52.53	73.98	21.45	PK
4944	42.15	2.35	H	44.50	53.98	9.48	AV
7416	49.19	9.80	H	58.99	73.98	14.99	PK
7416	36.88	9.80	H	46.68	53.98	7.30	AV

[ANT1&ANT2_MIMO(CDD)]

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2412
Channel No.	01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	51.70	0.00	1.95	V	53.65	73.98	20.33	PK
4824	39.36	0.11	1.95	V	41.42	53.98	12.56	AV
7236	50.03	0.00	9.86	V	59.89	73.98	14.09	PK
7236	37.52	0.11	9.86	V	47.49	53.98	6.49	AV
4824	53.01	0.00	1.95	H	54.96	73.98	19.02	PK
4824	40.39	0.11	1.95	H	42.45	53.98	11.53	AV
7236	50.28	0.00	9.86	H	60.14	73.98	13.84	PK
7236	37.91	0.11	9.86	H	47.88	53.98	6.10	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2437
Channel No.	06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	51.11	0.00	2.33	V	53.44	73.98	20.54	PK
4874	38.76	0.11	2.33	V	41.20	53.98	12.78	AV
7311	50.00	0.00	10.14	V	60.14	73.98	13.84	PK
7311	36.96	0.11	10.14	V	47.21	53.98	6.77	AV
4874	51.20	0.00	2.33	H	53.53	73.98	20.45	PK
4874	38.81	0.11	2.33	H	41.25	53.98	12.73	AV
7311	50.26	0.00	10.14	H	60.40	73.98	13.58	PK
7311	37.63	0.11	10.14	H	47.88	53.98	6.10	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2462
Channel No.	11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	51.11	0.00	2.28	V	53.39	73.98	20.59	PK
4924	38.26	0.11	2.28	V	40.65	53.98	13.33	AV
7386	49.23	0.00	9.81	V	59.04	73.98	14.94	PK
7386	37.22	0.11	9.81	V	47.14	53.98	6.84	AV
4924	50.12	0.00	2.28	H	52.40	73.98	21.58	PK
4924	38.15	0.11	2.28	H	40.54	53.98	13.44	AV
7386	48.93	0.00	9.81	H	58.74	73.98	15.24	PK
7386	36.88	0.11	9.81	H	46.80	53.98	7.18	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2467
Channel No.	12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	50.04	0.00	2.21	V	52.25	73.98	21.73	PK
4934	38.05	0.11	2.21	V	40.37	53.98	13.61	AV
7401	48.69	0.00	9.78	V	58.47	73.98	15.51	PK
7401	36.46	0.11	9.78	V	46.35	53.98	7.63	AV
4934	49.98	0.00	2.21	H	52.19	73.98	21.79	PK
4934	38.16	0.11	2.21	H	40.48	53.98	13.50	AV
7401	49.26	0.00	9.78	H	59.04	73.98	14.94	PK
7401	37.26	0.11	9.78	H	47.15	53.98	6.83	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	49.99	0.00	2.35	V	52.34	73.98	21.64
4944	38.16	0.11	2.35	V	40.62	53.98	13.36
7416	48.54	0.00	9.80	V	58.34	73.98	15.64
7416	37.10	0.11	9.80	V	47.01	53.98	6.97
4944	49.86	0.00	2.35	H	52.21	73.98	21.77
4944	38.05	0.11	2.35	H	40.51	53.98	13.47
7416	49.38	0.00	9.80	H	59.18	73.98	14.80
7416	37.66	0.11	9.80	H	47.57	53.98	6.41

Operation Mode: 802.11n (HT20)

Transfer MCS Index: 0

Operating Frequency 2412

Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	53.17	0.00	1.95	V	55.12	73.98	18.86	PK
4824	40.12	0.11	1.95	V	42.18	53.98	11.80	AV
7236	49.97	0.00	9.86	V	59.83	73.98	14.15	PK
7236	38.10	0.11	9.86	V	48.07	53.98	5.91	AV
4824	52.96	0.00	1.95	H	54.91	73.98	19.07	PK
4824	40.15	0.11	1.95	H	42.21	53.98	11.77	AV
7236	50.30	0.00	9.86	H	60.16	73.98	13.82	PK
7236	37.94	0.11	9.86	H	47.91	53.98	6.07	AV

Operation Mode: 802.11n (HT20)

Transfer MCS Index: 0

Operating Frequency 2437

Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	50.79	0.00	2.33	V	53.12	73.98	20.86	PK
4874	38.59	0.11	2.33	V	41.03	53.98	12.95	AV
7311	51.17	0.00	10.14	V	61.31	73.98	12.67	PK
7311	37.87	0.11	10.14	V	48.12	53.98	5.86	AV
4874	51.22	0.00	2.33	H	53.55	73.98	20.43	PK
4874	38.91	0.11	2.33	H	41.35	53.98	12.63	AV
7311	50.17	0.00	10.14	H	60.31	73.98	13.67	PK
7311	37.96	0.11	10.14	H	48.21	53.98	5.77	AV

Operation Mode: 802.11n (HT20)

Transfer MCS Index: 0

Operating Frequency 2462

Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	49.98	0.00	2.28	V	52.26	73.98	21.72	PK
4924	37.96	0.11	2.28	V	40.35	53.98	13.63	AV
7386	48.77	0.00	9.81	V	58.58	73.98	15.40	PK
7386	36.97	0.11	9.81	V	46.89	53.98	7.09	AV
4924	50.04	0.00	2.28	H	52.32	73.98	21.66	PK
4924	38.04	0.11	2.28	H	40.43	53.98	13.55	AV
7386	48.91	0.00	9.81	H	58.72	73.98	15.26	PK
7386	37.04	0.11	9.81	H	46.96	53.98	7.02	AV

Operation Mode: 802.11n (HT20)

Transfer Rate: 6.5 Mbps

Operating Frequency 2467

Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4934	50.34	0.00	2.21	V	52.55	73.98	21.43	PK
4934	37.96	0.11	2.21	V	40.28	53.98	13.70	AV
7401	48.46	0.00	9.78	V	58.24	73.98	15.74	PK
7401	36.95	0.11	9.78	V	46.84	53.98	7.14	AV
4934	50.61	0.00	2.21	H	52.82	73.98	21.16	PK
4934	38.07	0.11	2.21	H	40.39	53.98	13.59	AV
7401	48.66	0.00	9.78	H	58.44	73.98	15.54	PK
7401	37.11	0.11	9.78	H	47.00	53.98	6.98	AV

Operation Mode:	802.11g
Transfer Rate:	6 Mbps
Operating Frequency	2472
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4944	49.96	0.00	2.35	V	52.31	73.98	21.67
4944	37.95	0.11	2.35	V	40.41	53.98	13.57
7416	48.77	0.00	9.80	V	58.57	73.98	15.41
7416	37.04	0.11	9.80	V	46.95	53.98	7.03
4944	50.23	0.00	2.35	H	52.58	73.98	21.40
4944	37.96	0.11	2.35	H	40.42	53.98	13.56
7416	49.54	0.00	9.80	H	59.34	73.98	14.64
7416	37.18	0.11	9.80	H	47.09	53.98	6.89

[DBS Mode 2.4 GHz & 5GHz]

Operation Mode:	802.11b & 802.11a
Transfer Rate:	1 Mbps & 6 Mbps
Operating Frequency	2412 & 5180
Channel No.	01 Ch & 36 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	55.44	1.95	V	57.39	73.98	16.59	PK
4824	48.47	1.95	V	50.42	53.98	3.56	AV
7236	49.69	9.86	V	59.55	73.98	14.43	PK
7236	37.87	9.86	V	47.73	53.98	6.25	AV
4824	55.26	1.95	H	57.21	73.98	16.77	PK
4824	48.43	1.95	H	50.38	53.98	3.60	AV
7236	49.98	9.86	H	59.84	73.98	14.14	PK
7236	37.99	9.86	H	47.85	53.98	6.13	AV

Operation Mode: 802.11b & 802.11a

Transfer Rate: 1 Mbps & 6 Mbps

Operating Frequency 2437 & 5600

Channel No. 06 Ch & 120 Ch


Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	53.81	2.33	V	56.14	73.98	17.84	PK
4874	46.58	2.33	V	48.91	53.98	5.07	AV
7311	49.00	10.14	V	59.14	73.98	14.84	PK
7311	36.75	10.14	V	46.89	53.98	7.09	AV
4874	53.91	2.33	H	56.24	73.98	17.74	PK
4874	46.67	2.33	H	49.00	53.98	4.98	AV
7311	49.11	10.14	H	59.25	73.98	14.73	PK
7311	36.87	10.14	H	47.01	53.98	6.97	AV

Operation Mode:	802.11b & 802.11a
Transfer Rate:	1 Mbps & 6 Mbps
Operating Frequency	2462 & 5825
Channel No.	11 Ch & 165 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	54.28	2.28	V	56.56	73.98	17.42	PK
4924	47.66	2.28	V	49.94	53.98	4.04	AV
7386	48.76	9.81	V	58.57	73.98	15.41	PK
7386	36.69	9.81	V	46.50	53.98	7.48	AV
4924	54.54	2.28	H	56.82	73.98	17.16	PK
4924	48.00	2.28	H	50.28	53.98	3.70	AV
7386	48.92	9.81	H	58.73	73.98	15.25	PK
7386	37.07	9.81	H	46.88	53.98	7.10	AV


[ANT1_SISO] **Test Plots (Worst case : Y-H)**

Radiated Spurious Emissions plot – Average Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

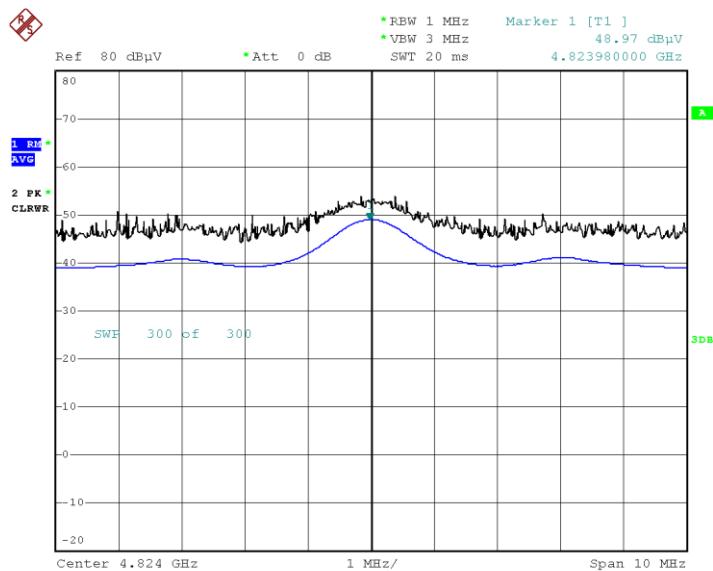

Date: 16.OCT.2019 13:46:34


Radiated Spurious Emissions plot – Peak Reading (802.11b_1Mbps, Ch.1 2nd Harmonic)

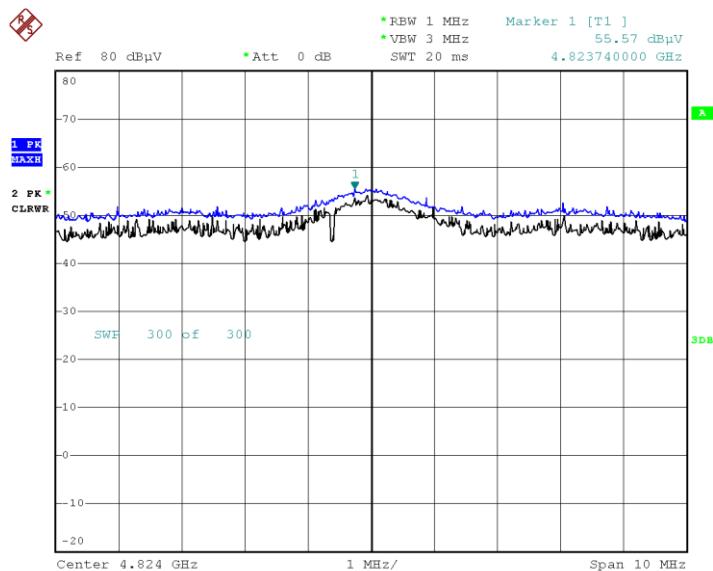

Date: 16.OCT.2019 13:44:10


[ANT2_SISO] **Test Plots (Worst case : X-V)**

Radiated Spurious Emissions plot – Average Reading (802.11b_1Mbps, Ch.6 3rd Harmonic)

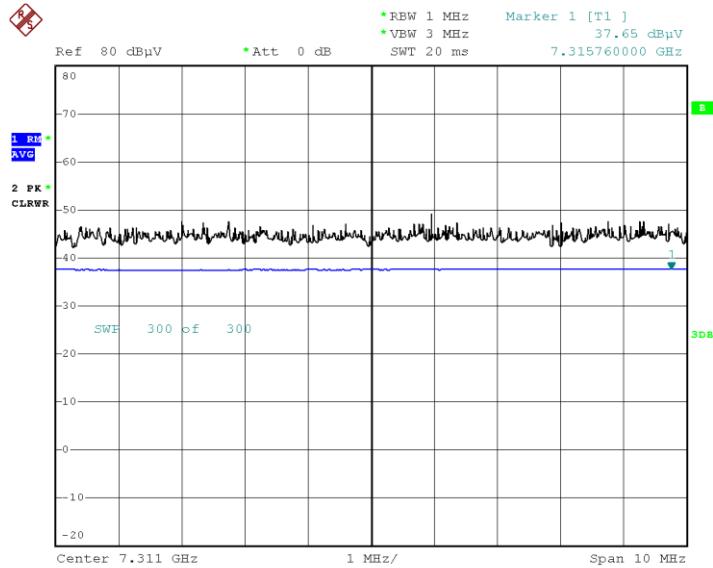

Date: 28.OCT.2019 19:48:36


Radiated Spurious Emissions plot – Peak Reading (802.11b_1Mbps, Ch.6 3rd Harmonic)

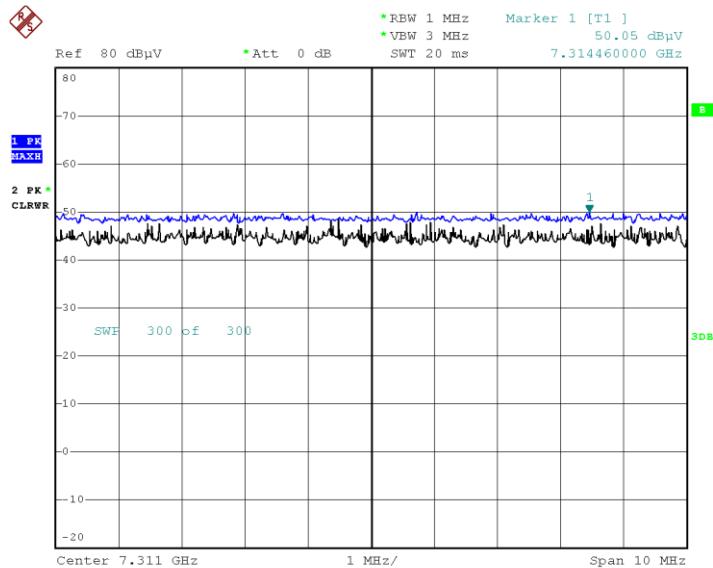

Date: 28.OCT.2019 19:50:53


[ANT1&ANT2_MIMO(CDD)]_(Worst case : Y-V)

Radiated Spurious Emissions plot – Average Reading (802.11g_ 6 Mbps, 06 Ch 3rd Harmonic)

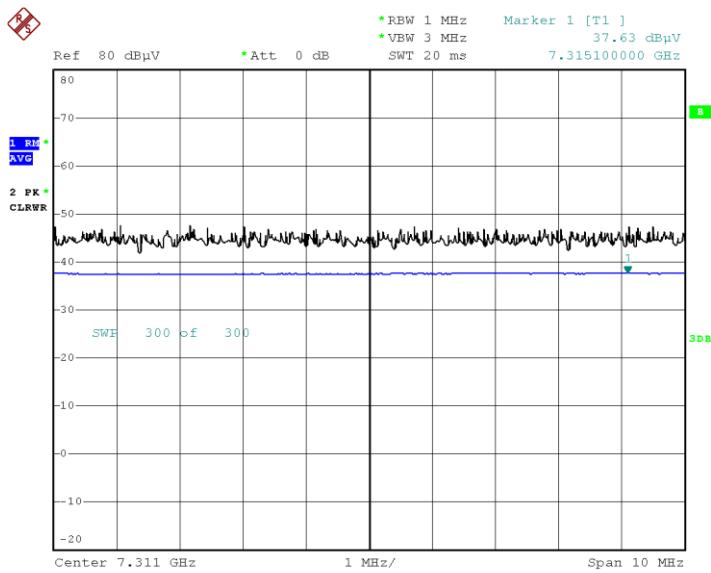

Date: 28.OCT.2019 19:56:23

Radiated Spurious Emissions plot – Peak Reading (802.11g_ 6 Mbps, 06 Ch 3rd Harmonic)

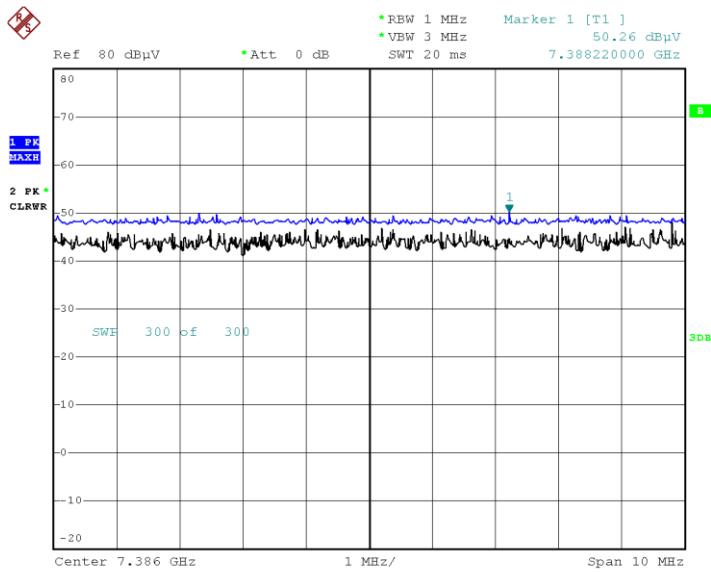


Date: 28.OCT.2019 20:00:21

Note:

Plot of worst case are only reported.


[DBS Mode 2.4 GHz & 5GHz_Y-H]

Radiated Spurious Emissions plot – Average Reading (802.11b & 802.11a_ 1 Mbps & 6 Mbps, 1 Ch & 36 Ch, 2nd Harmonic)

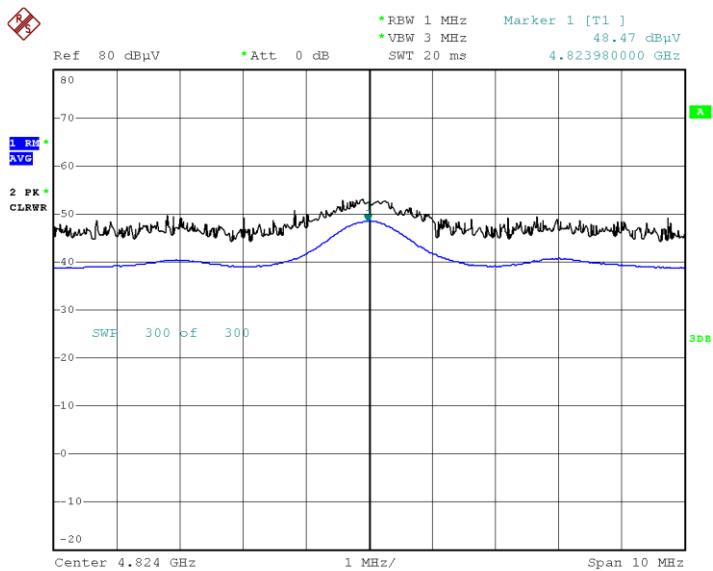

Date: 22.OCT.2019 10:24:16

Radiated Spurious Emissions plot – Peak Reading (802.11b & 802.11a_ 1 Mbps & 6 Mbps, 1 Ch & 36 Ch, 2nd Harmonic)

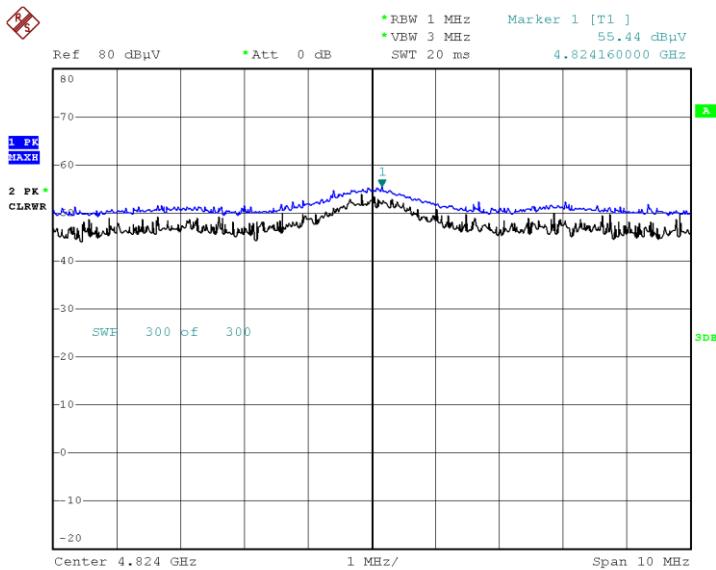

Date: 22.OCT.2019 10:26:18

Note:

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

[ANT1_SISO]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F.-A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.09	0.85	H	54.94	73.98	19.04	PK
2390.0	42.84	0.85	H	43.69	53.98	10.29	AV
2390.0	53.81	0.85	V	54.66	73.98	19.32	PK
2390.0	42.16	0.85	V	43.01	53.98	10.97	AV
2483.5	54.47	1.13	H	55.60	73.98	18.38	PK
2483.5	42.98	1.13	H	44.11	53.98	9.87	AV
2483.5	53.91	1.13	V	55.04	73.98	18.94	PK
2483.5	41.52	1.13	V	42.65	53.98	11.33	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Channel No	Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F.-A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	53.79	1.13	H	54.92	73.98	19.06	PK
	2483.5	41.97	1.13	H	43.10	53.98	10.88	AV
	2483.5	52.66	1.13	V	53.79	73.98	20.19	PK
	2483.5	40.88	1.13	V	42.01	53.98	11.97	AV
13	2483.5	53.53	1.13	H	54.66	73.98	19.32	PK
	2483.5	41.95	1.13	H	43.08	53.98	10.90	AV
	2483.5	53.21	1.13	V	54.34	73.98	19.64	PK
	2483.5	41.45	1.13	V	42.58	53.98	11.40	AV

[ANT2_SISO]

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2412 MHz, 2462 MHz
Channel No.	01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F.-A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	54.95	0.85	H	55.80	73.98	18.18	PK
2390.0	42.36	0.85	H	43.21	53.98	10.77	AV
2390.0	54.11	0.85	V	54.96	73.98	19.02	PK
2390.0	42.01	0.85	V	42.86	53.98	11.12	AV
2483.5	54.14	1.13	H	55.27	73.98	18.71	PK
2483.5	42.40	1.13	H	43.53	53.98	10.45	AV
2483.5	53.88	1.13	V	55.01	73.98	18.97	PK
2483.5	42.05	1.13	V	43.18	53.98	10.80	AV

Operation Mode:	802.11b
Transfer Rate:	1 Mbps
Operating Frequency	2467 MHz, 2472 MHz
Channel No.	12 Ch, 13 Ch

Channel No	Frequency [MHz]	Reading [dBuV]	A.F.+C.L.+D.F.-A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	53.36	1.13	H	54.49	73.98	19.49	PK
	2483.5	41.97	1.13	H	43.10	53.98	10.88	AV
	2483.5	53.05	1.13	V	54.18	73.98	19.80	PK
	2483.5	41.75	1.13	V	42.88	53.98	11.10	AV
13	2483.5	53.51	1.13	H	54.64	73.98	19.34	PK
	2483.5	41.65	1.13	H	42.78	53.98	11.20	AV
	2483.5	53.44	1.13	V	54.57	73.98	19.41	PK
	2483.5	41.55	1.13	V	42.68	53.98	11.30	AV

[ANT1&ANT2_MIMO(CDD)]

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	59.37	0.00	0.85	H	60.22	73.98	13.76	PK
2390.0	47.29	0.11	0.85	H	48.25	53.98	5.73	AV
2390.0	58.11	0.00	0.85	V	58.96	73.98	15.02	PK
2390.0	46.18	0.11	0.85	V	47.14	53.98	6.84	AV
2483.5	58.95	0.00	1.13	H	60.08	73.98	13.90	PK
2483.5	48.76	0.11	1.13	H	50.00	53.98	3.98	AV
2483.5	58.68	0.00	1.13	V	59.81	73.98	14.17	PK
2483.5	48.01	0.11	1.13	V	49.25	53.98	4.73	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2467 MHz, 2472 MHz
 Channel No. 12 Ch, 13 Ch

Channel No	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	54.09	0.00	1.13	H	55.22	73.98	18.76	PK
	2483.5	42.11	0.11	1.13	H	43.35	53.98	10.63	AV
	2483.5	53.81	0.00	1.13	V	54.94	73.98	19.04	PK
	2483.5	42.01	0.11	1.13	V	43.25	53.98	10.73	AV
13	2483.5	59.78	0.00	1.13	H	60.91	73.98	13.07	PK
	2483.5	45.79	0.11	1.13	H	47.03	53.98	6.95	AV
	2483.5	58.92	0.00	1.13	V	60.05	73.98	13.93	PK
	2483.5	45.24	0.11	1.13	V	46.48	53.98	7.50	AV

Operation Mode:	802.11n (HT20)	
Transfer Rate:	0	
Operating Frequency	2412 MHz, 2462 MHz	
Channel No.	01 Ch	

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	60.78	0.00	0.85	H	61.63	73.98	12.35	PK
2390.0	47.25	0.11	0.85	H	48.21	53.98	5.77	AV
2390.0	58.91	0.00	0.85	V	59.76	73.98	14.22	PK
2390.0	46.86	0.11	0.85	V	47.82	53.98	6.16	AV

Operation Mode:	802.11n (HT20)	
Transfer Rate:	0	
Operating Frequency	2412 MHz, 2462 MHz	
Channel No.	01 Ch	

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5*(2484)	61.08	0.00	1.13	H	62.21	73.98	11.77	PK
2483.5*(2484)	50.42	0.11	1.13	H	51.66	53.98	2.32	AV
2483.5*(2485)	59.00	0.00	1.13	H	60.13	73.98	13.85	PK
2483.5*(2485)	48.58	0.11	1.13	H	49.82	53.98	4.16	AV
2485.5~2500	63.39	0.00	1.13	H	64.52	73.98	9.46	PK
2485.5~2500	47.54	0.11	1.13	H	48.78	53.98	5.20	AV


Note : * integration method Used (ANSI C63.10 Section11.13.3)

Operation Mode:	802.11n (HT20)	
Transfer Rate:	0	
Operating Frequency	2467 MHz, 2472 MHz	
Channel No.	12 Ch, 13 Ch	

Channel No	Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F -A.G+ATT. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
12	2483.5	54.04	0.00	1.13	H	55.17	73.98	18.81	PK
	2483.5	42.62	0.11	1.13	H	43.86	53.98	10.12	AV
	2483.5	53.04	0.00	1.13	V	54.17	73.98	19.81	PK
	2483.5	41.59	0.11	1.13	V	42.83	53.98	11.15	AV
13	2483.5	57.33	0.00	1.13	H	58.46	73.98	15.52	PK
	2483.5	43.63	0.11	1.13	H	44.87	53.98	9.11	AV
	2483.5	56.91	0.00	1.13	V	58.04	73.98	15.94	PK
	2483.5	43.08	0.11	1.13	V	44.32	53.98	9.66	AV


[ANT1_SISO] **Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11b_1Mbps Ch.11)

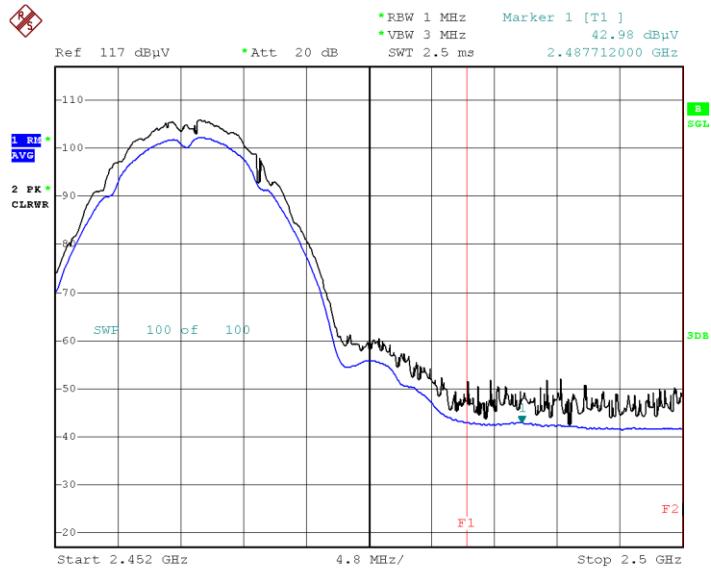

Date: 28.OCT.2019 18:19:40


Radiated Restricted Band Edges plot – Peak Reading (802.11b_1Mbps Ch.11)

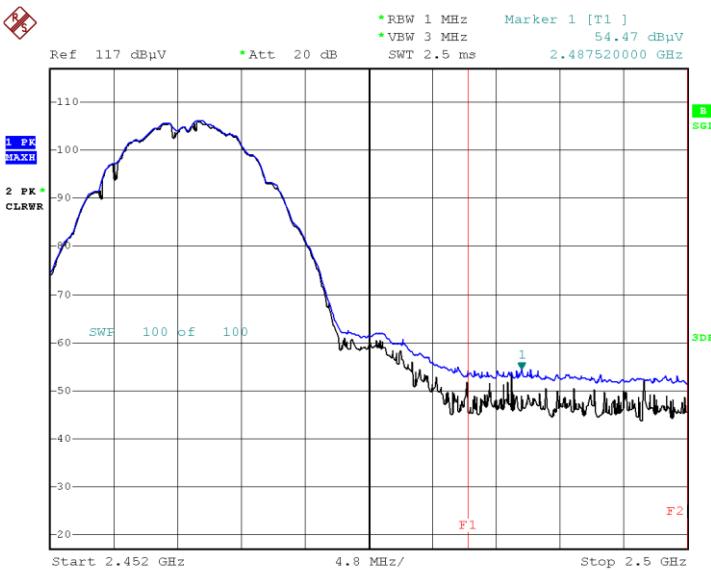

Date: 28.OCT.2019 18:21:15


[ANT2_SISO] **Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11b_1Mbps Ch.11)

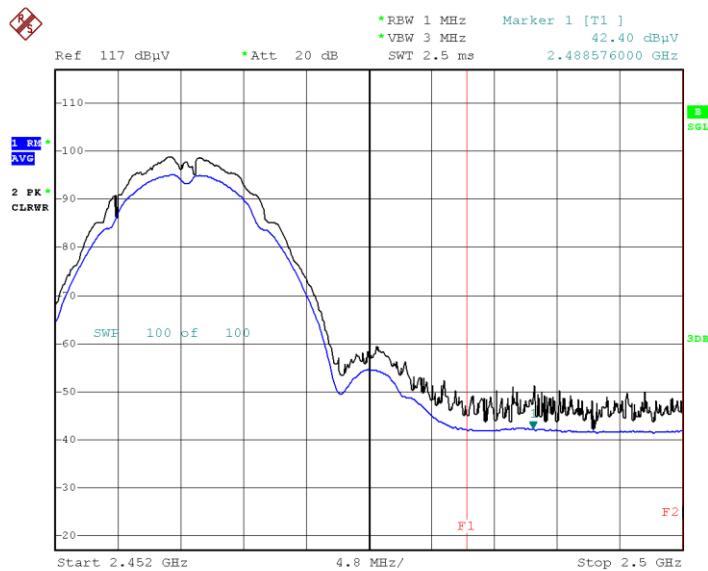

Date: 28.OCT.2019 18:23:37

Radiated Restricted Band Edges plot – Peak Reading (802.11b_1Mbps Ch.11)

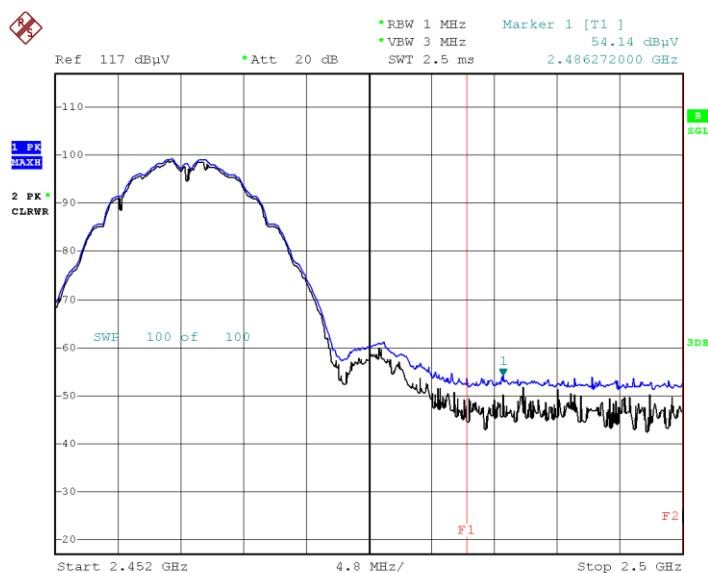

Date: 28.OCT.2019 18:24:43


[ANT1&ANT2_MIMO(CDD)]**□ Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.11) 2484MHz



Date: 28.OCT.2019 17:42:16


Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.11) 2484MHz

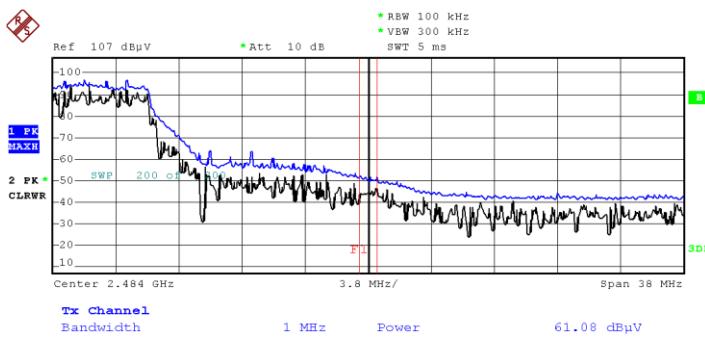

Date: 28.OCT.2019 17:45:09


[ANT1&ANT2_MIMO(CDD)] **Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.11) 2485MHz

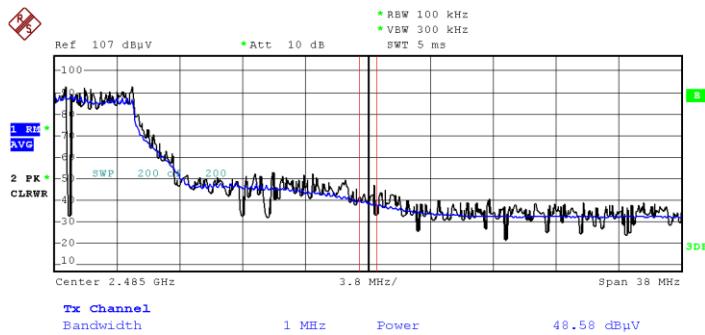

Date: 28.OCT.2019 17:47:41


Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.11) 2485MHz

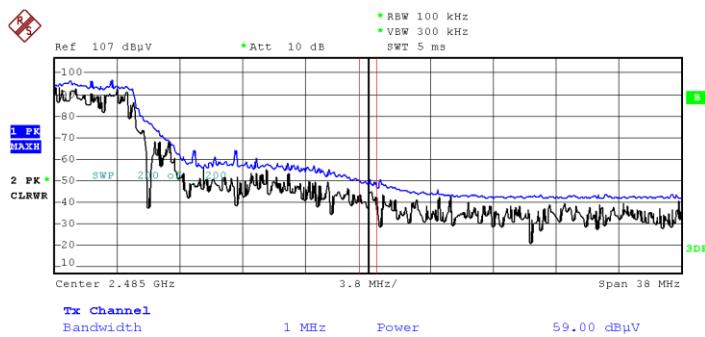

Date: 28.OCT.2019 17:47:02


[ANT1&ANT2_MIMO(CDD)]**□ Test Plots (Worst case : X-H)**

Radiated Restricted Band Edges plot – Average Reading (802.11n(HT20) Ch.11) 2485.5~2500MHz

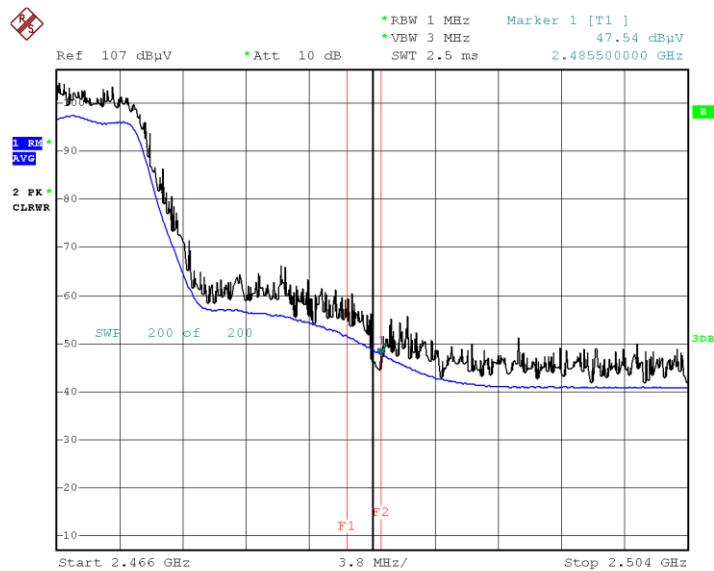

Date: 28.OCT.2019 17:48:29

Radiated Restricted Band Edges plot – Peak Reading (802.11n(HT20) Ch.11) 2485.5~2500MHz

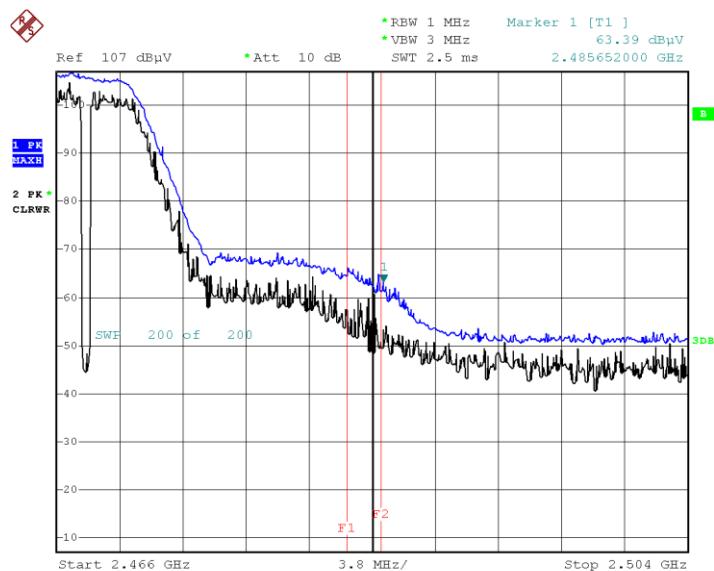

Date: 28.OCT.2019 17:49:47

Note:

Plot of worst case are only reported.

9.8 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

HCT TEST Report

Common Information

EUT: SM-G770F/DS
 Manufacturer: SAMSUNG
 Test Site: SHIELD ROOM
 Operating Conditions: SM-G770F/DS_2.4G_L1

FCC CLASS B_Exten Cable

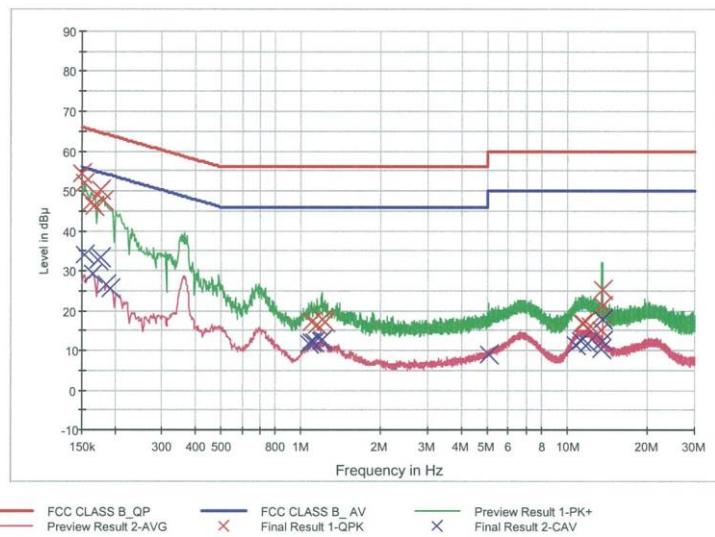

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	54.4	9.000	Off	L1	9.8	11.6	66.0
0.154000	51.9	9.000	Off	L1	9.8	13.9	65.8
0.162000	47.2	9.000	Off	L1	9.8	18.1	65.4
0.166000	46.2	9.000	Off	L1	9.8	18.9	65.2
0.176000	50.5	9.000	Off	L1	9.8	14.2	64.7
0.180000	47.7	9.000	Off	L1	9.8	16.8	64.5
1.100000	17.1	9.000	Off	L1	9.9	38.9	56.0
1.154000	16.6	9.000	Off	L1	9.9	39.4	56.0
1.196000	17.7	9.000	Off	L1	9.9	38.3	56.0
1.200000	17.9	9.000	Off	L1	9.9	38.1	56.0
1.210000	17.7	9.000	Off	L1	9.9	38.3	56.0
1.226000	17.3	9.000	Off	L1	9.9	38.7	56.0
11.386000	16.8	9.000	Off	L1	10.4	43.2	60.0
11.444000	16.9	9.000	Off	L1	10.4	43.1	60.0
12.194000	16.2	9.000	Off	L1	10.4	43.8	60.0
13.370000	15.1	9.000	Off	L1	10.4	44.9	60.0
13.554000	21.2	9.000	Off	L1	10.4	38.8	60.0
13.558000	25.2	9.000	Off	L1	10.4	34.8	60.0

2019-10-01

오후 2:15:28

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.154000	34.2	9.000	Off	L1	9.8	21.6	55.8
0.164000	29.4	9.000	Off	L1	9.8	25.8	55.3
0.172000	32.7	9.000	Off	L1	9.8	22.2	54.9
0.176000	33.4	9.000	Off	L1	9.8	21.3	54.7
0.186000	26.6	9.000	Off	L1	9.8	27.6	54.2
0.192000	25.5	9.000	Off	L1	9.8	28.5	53.9
1.070000	11.6	9.000	Off	L1	9.9	34.4	46.0
1.090000	12.0	9.000	Off	L1	9.9	34.0	46.0
1.120000	12.1	9.000	Off	L1	9.9	33.9	46.0
1.186000	12.4	9.000	Off	L1	9.9	33.6	46.0
1.196000	12.8	9.000	Off	L1	9.9	33.2	46.0
5.068000	8.9	9.000	Off	L1	10.1	41.1	50.0
10.752000	11.5	9.000	Off	L1	10.3	38.5	50.0
11.254000	12.3	9.000	Off	L1	10.4	37.7	50.0
11.908000	11.7	9.000	Off	L1	10.4	38.3	50.0
13.370000	10.3	9.000	Off	L1	10.4	39.7	50.0
13.554000	12.3	9.000	Off	L1	10.4	37.7	50.0
13.558000	17.7	9.000	Off	L1	10.4	32.3	50.0

2019-10-01

오후 2:15:28

Conducted Emissions (Line 2)


Test

1 / 2

HCT TEST Report**Common Information**

EUT: SM-G770F/DS
Manufacturer: SAMSUNG
Test Site: SHIELD ROOM
Operating Conditions: SM-G770F/DS_2.4G_N

FCC CLASS B_Exten Cable

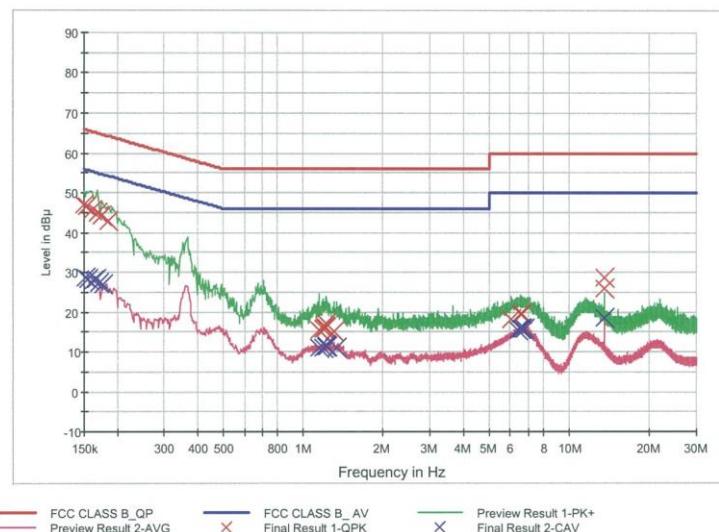**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	47.0	9.000	Off	N	9.8	19.0	66.0
0.154000	46.5	9.000	Off	N	9.8	19.3	65.8
0.160000	45.8	9.000	Off	N	9.8	19.7	65.5
0.168000	44.9	9.000	Off	N	9.8	20.2	65.1
0.174000	44.1	9.000	Off	N	9.8	20.7	64.8
0.186000	42.7	9.000	Off	N	9.8	21.5	64.2
1.146000	15.4	9.000	Off	N	9.9	40.6	56.0
1.184000	15.7	9.000	Off	N	9.9	40.3	56.0
1.204000	16.2	9.000	Off	N	9.9	39.8	56.0
1.214000	17.1	9.000	Off	N	9.9	38.9	56.0
1.224000	16.1	9.000	Off	N	9.9	39.9	56.0
1.300000	15.0	9.000	Off	N	9.9	41.0	56.0
6.024000	18.2	9.000	Off	N	10.1	41.8	60.0
6.576000	19.4	9.000	Off	N	10.2	40.6	60.0
6.580000	19.5	9.000	Off	N	10.2	40.5	60.0
6.652000	19.4	9.000	Off	N	10.2	40.6	60.0
13.558000	28.7	9.000	Off	N	10.5	31.3	60.0
13.562000	25.9	9.000	Off	N	10.5	34.1	60.0

2019-10-01

오후 2:05:27

Test

2 / 2

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.152000	28.8	9.000	Off	N	9.8	27.1	55.9
0.156000	28.4	9.000	Off	N	9.8	27.3	55.7
0.162000	28.1	9.000	Off	N	9.8	27.2	55.4
0.166000	28.3	9.000	Off	N	9.8	26.9	55.2
0.170000	27.3	9.000	Off	N	9.8	27.6	55.0
0.176000	26.8	9.000	Off	N	9.8	27.8	54.7
1.146000	10.9	9.000	Off	N	9.9	35.1	46.0
1.184000	11.0	9.000	Off	N	9.9	35.0	46.0
1.214000	11.6	9.000	Off	N	9.9	34.4	46.0
1.222000	11.4	9.000	Off	N	9.9	34.6	46.0
1.232000	11.5	9.000	Off	N	9.9	34.5	46.0
1.342000	11.1	9.000	Off	N	9.9	34.9	46.0
6.416000	15.4	9.000	Off	N	10.2	34.6	50.0
6.580000	15.6	9.000	Off	N	10.2	34.4	50.0
6.626000	15.7	9.000	Off	N	10.2	34.3	50.0
6.652000	15.8	9.000	Off	N	10.2	34.2	50.0
6.774000	15.6	9.000	Off	N	10.2	34.4	50.0
13.560000	18.4	9.000	Off	N	10.5	31.6	50.0

2019-10-01

오후 2:05:27

10. LIST OF TEST EQUIPMENT**Conducted Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	12/12/2018	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/18/2019	Annual	100033
ESPAC	SU-642 /Temperature Chamber	03/12/2019	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	01/10/2019	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/24/2019	Annual	101231
Agilent	N1911A / Power Meter	04/10/2019	Annual	MY45100523
Agilent	N1921A / Power Sensor	04/10/2019	Annual	MY52260025
Agilent	87300B / Directional Coupler	11/20/2018	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/24/2019	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/18/2019	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	07/02/2019	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	08/23/2018	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	VULB 9160 / TRILOG Antenna	08/09/2018	Biennial	9160-3368
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	12/04/2017	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	05/09/2019	Annual	100854
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	07/31/2019	Annual	102168
Agilent	N9020A / Signal Analyzer	05/23/2019	Annual	MY51110085
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	05/23/2019	Annual	8
Wainwright Instruments	WHKX7.0/18G-8SS / High Pass Filter	05/03/2019	Annual	29
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	06/19/2019	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	01/03/2019	Annual	2
Api tech.	18B-03 / Attenuator (3 dB)	06/04/2019	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	07/15/2019	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	07/01/2019	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	07/01/2019	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	01/03/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	06/18/2019	Annual	25956

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1910-FC007-P