



# **CERTIFICATION TEST REPORT**

**Report Number. :** 4789354138-E6V1

**Applicant :** SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model :** SM-G770U1

**FCC ID :** A3LSMG770U

**EUT Description :** GSM/CDMA/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac,  
ANT+ and NFC

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

March 03, 2020

**Prepared by:**

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



**Testing Laboratory**

**TL-637**

---

## REPORT REVISION HISTORY

Rev.	Issue Date	Revisions	Revised By
V1	03/03/20	Initial issue	Hyunsik Yun

## TABLE OF CONTENTS

<b>REPORT REVISION HISTORY .....</b>	<b>2</b>
<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. SUMMARY TABLE .....</b>	<b>6</b>
<b>3. TEST METHODOLOGY .....</b>	<b>7</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>7</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>8</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	8
5.2. <i>SAMPLE CALCULATION.....</i>	8
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	8
5.4. <i>DECISION RULE.....</i>	8
<b>6. EQUIPMENT UNDER TEST.....</b>	<b>9</b>
6.1. <i>EUT DESCRIPTION.....</i>	9
6.2. <i>MAXIMUM OUTPUT POWER.....</i>	9
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	9
6.4. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	9
6.5. <i>DESCRIPTION OF TEST SETUP.....</i>	10
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>12</b>
<b>8. MEASUREMENT METHODS.....</b>	<b>13</b>
<b>9. ANTENNA PORT TEST RESULTS.....</b>	<b>14</b>
9.1. <i>ON TIME AND DUTY CYCLE .....</i>	14
9.2. <i>20 dB AND 99% BANDWIDTH.....</i>	15
9.2.1. <i>BLUETOOTH BASIC DATA RATE GFSK MODULATION .....</i>	16
9.2.2. <i>BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION.....</i>	17
<b>10. ANTENNA PORT TEST RESULTS .....</b>	<b>18</b>
10.1. <i>HOPPING FREQUENCY SEPARATION .....</i>	18
10.1.1. <i>BLUETOOTH BASIC DATA RATE GFSK MODULATION .....</i>	19
10.1.2. <i>BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....</i>	20
10.2. <i>NUMBER OF HOPPING CHANNELS.....</i>	21
10.2.1. <i>BLUETOOTH BASIC DATA RATE GFSK MODULATION .....</i>	22
10.2.2. <i>BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....</i>	24
10.3. <i>AVERAGE TIME OF OCCUPANCY.....</i>	26
10.3.1. <i>BLUETOOTH BASIC DATA RATE GFSK MODULATION .....</i>	27

---

10.3.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	29
10.4.	<i>OUTPUT POWER</i> .....	31
10.4.1.	BASIC DATA RATE GFSK MODULATION.....	31
10.4.2.	ENHANCED DATA RATE Pi/4-DPSK MODULATION .....	31
10.4.3.	ENHANCED DATA RATE 8PSK MODULATION .....	31
10.4.4.	OUTPUT POWER PLOTS.....	32
10.5.	<i>AVERAGE POWER</i> .....	35
10.5.1.	BASIC DATA RATE GFSK MODULATION.....	35
10.5.2.	ENHANCED DATA RATE PI/4-DQPSK MODULATION .....	35
10.5.3.	ENHANCED DATA RATE 8PSK MODULATION .....	35
10.6.	<i>CONDUCTED SPURIOUS EMISSIONS</i> .....	36
10.6.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	37
10.6.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	39
<b>11.</b>	<b>RADIATED TEST RESULTS</b> .....	<b>41</b>
11.1.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	43
11.1.1.	BLUETOOTH BASIC DATA RATE GFSK MODULATION .....	43
11.1.2.	BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION .....	53
11.2.	<i>WORST CASE BELOW 1 GHz</i> .....	63
<b>12.</b>	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	<b>65</b>
12.1.1.	AC Power Line.....	66

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/CDMA/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC

**MODEL:** SM-G770U1

**SERIAL NUMBER:** R37MC0CE6KN (CONDUCTED)  
R38MC0CE7SR (RADIATED);

**DATE TESTED:** JAN 29, 2020 – FEB 14, 2020;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Hyunsik Yun  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1051, 15.247 (d)	Band Edge / Conducted Spurious Emission	-20dBc	Conducted	Pass
15.247 (b)(1)	TX conducted output power	<21dBm		Pass
15.247 (a)(1)	Hopping frequency separation	> two-thirds of the 20 dB bandwidth		Pass
15.247 (a)(1)(iii)	Number of Hopping channels	More than 15 non-overlapping channels		Pass
15.247 (a)(1)(iii)	Avg Time of Occupancy	< 0.4sec		Pass
15.207 (a)	AC Power Line conducted emissions	Section 10	Power Line conducted	Pass
15.205, 15.209	Radiated Spurious Emission	< 54dBuV/m	Radiated	Pass

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 15.247 Meas Guidance v05r02.
4. ANSI C63.10-2013.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/wp-content/uploads/2017/05/TL-637.pdf>.

## 5. CALIBRATION AND UNCERTAINTY

### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.82 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

### 5.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.



## 6. EQUIPMENT UNDER TEST

### 6.1. EUT DESCRIPTION

The EUT is a GSM/CDMA/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, ANT+ and NFC. This test report addresses the DSS (BT) operational mode.

### 6.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak and average conducted output power as follows:

Frequency Range [MHz]	Mode	Power Mode	Output Power [dBm]	Output Power [mW]
2 402 ~ 2 480	Basic GFSK	Average	9.460	8.83
		Peak	9.763	9.47
	Enhanced Pi/4-DPSK	Average	8.311	6.78
		Peak	10.279	10.66
	Enhanced 8PSK	Average	8.336	6.82
		Peak	10.374	10.90

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**The internal antenna was Permanently attached.  
 Therefore this E.U.T Complies with the requirement of §15.203.**

The radio utilizes an internal antenna, with a maximum gain of -3.57 dBi

### 6.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/high channels.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Y orientation.

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance.

**6.5. DESCRIPTION OF TEST SETUP**

**SUPPORT EQUIPMENT**

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA800	R37MAYF19B7DK3	N/A
Data Cable	SAMSUNG	EP-DA705BBE	N/A	N/A


**I/O CABLE**

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0m	N/A


**TEST SETUP**

The EUT is continuously communicating to the Bluetooth tester during the tests.  
 Test software enable BT communications.

**SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)**

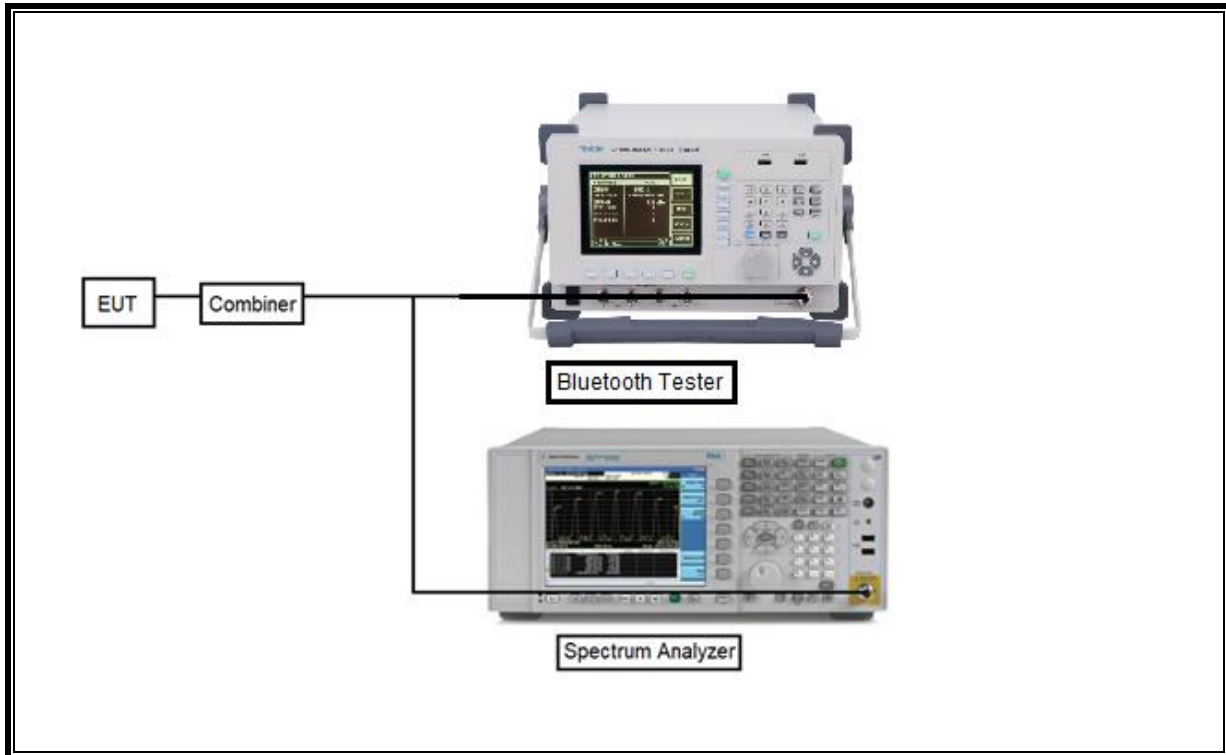

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

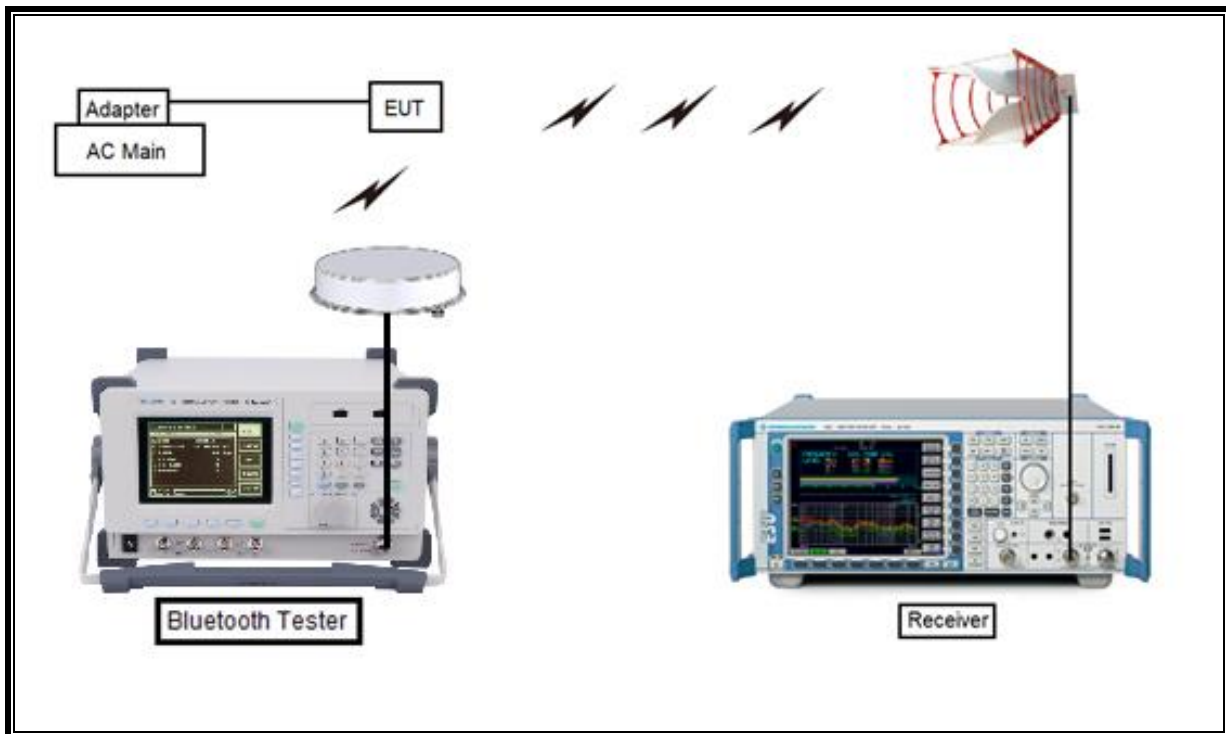

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Next Cal. Date
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-14-20
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-08-20
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	80108-0004	N/A
Directional Antenna	Cobham	FPA3-0.8-6.0R/1329	110367-0003	N/A
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-05-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-06-20
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-06-20
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-20
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-09-20
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	08-07-20
Combiner	WEINCHEL	1575	2150	08-08-20
Attenuator	PASTERNAK	PE7087-10	A001	08-08-20
Attenuator	PASTERNAK	PE7087-10	A008	08-08-20
Attenuator	PASTERNAK	PE7087-10	2	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-20
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-20
EMI Test Receive, 44 GHz	R&S	ESW44	101590	08-05-20
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-06-20
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-06-20
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-06-20
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-06-20
LISN	R&S	ENV-216	101837	08-09-20
Termination	WEINSCHL	M1406A	T01	08-08-20
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

---

## 8. MEASUREMENT METHODS

20dB BW : ANSI C63.10, Section 6.9.2

99% BW : ANSI C63.10, Section 6.9.3

HOPPING FREQUENCY SEPARATION : ANSI C63.10, Section 7.8.2

NUMBER OF HOPPING CHANNELS : ANSI C63.10, Section 7.8.3

AVERAGE TIME OF OCCUPANCY : ANSI C63.10, Section 7.8.4

OUTPUT POWER : ANSI C63.10, Section 7.8.5.

Out-of-band EMISSIONS (Conducted) : ANSI C63.10, Section 7.8.6, 7.8.8

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: ANSI C63.10, Section 6.

Out-of-band EMISSIONS IN RESTRICTED BANDS : ANSI C63.10, Section 6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

## 9. ANTENNA PORT TEST RESULTS

### 9.1. ON TIME AND DUTY CYCLE

#### LIMITS


None; for reporting purposes only.

#### PROCEDURE

ANSI C63.10, Section 11.6 : Zero-Span Spectrum Analyzer Method.

#### ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B [msec]	Period [msec]	Duty Cycle x [linear]	Duty Cycle [%]	Duty Cycle Correction Factor [dB]	1/T Minimum VBW [kHz]
<b>2400MHz Bands</b>						
BT	2.884	3.750	0.769	76.9%	1.14	0.347

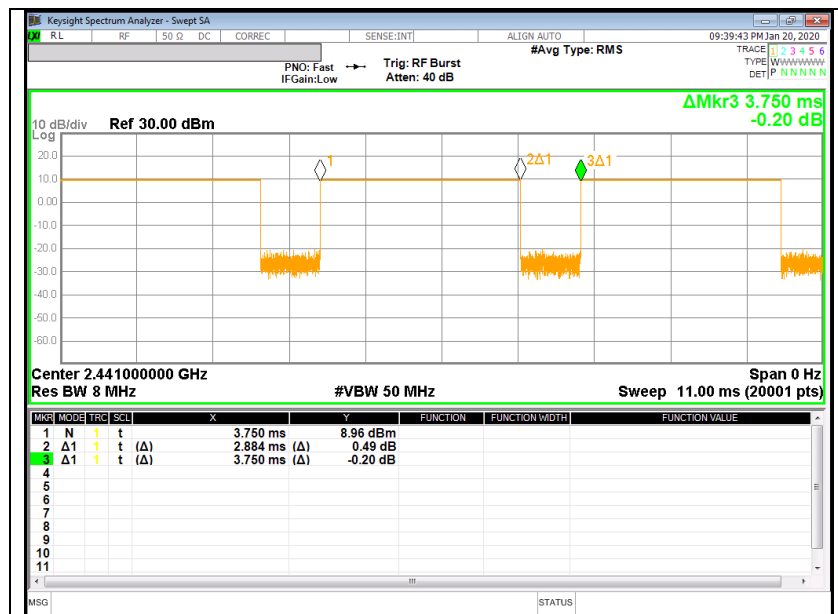

---

## **9.2. 20 dB AND 99% BANDWIDTH**

### **LIMITS**

None; for reporting purposes only.



### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

### **RESULTS**

### 9.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION



Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.929	0.846
Mid	2441	0.905	0.846
High	2480	0.903	0.847

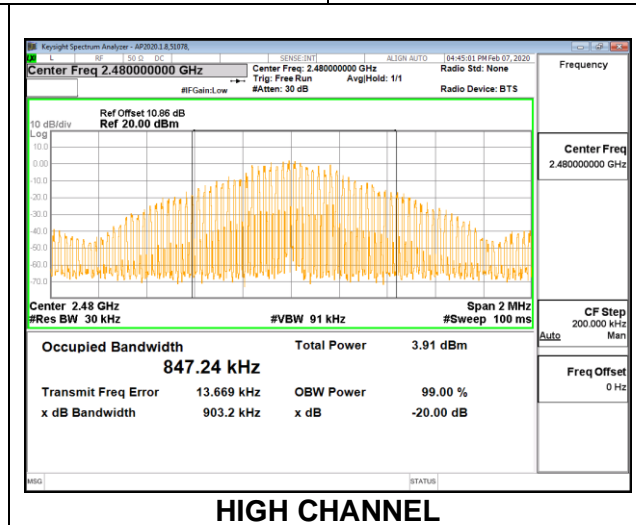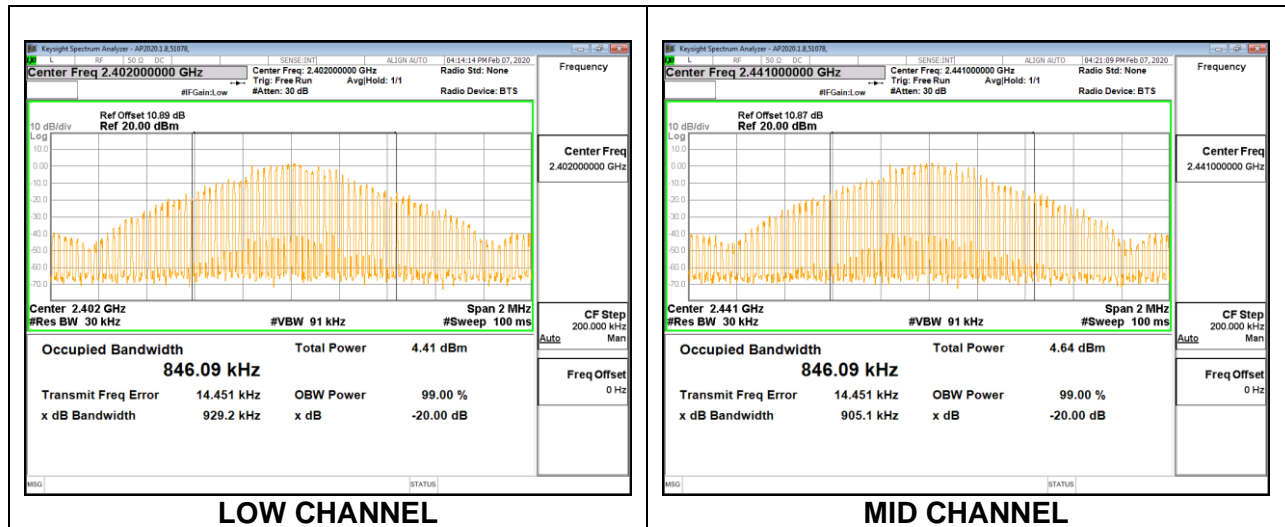



### 9.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.26	1.1848
Mid	2441	1.261	1.1855
High	2480	1.256	1.1839

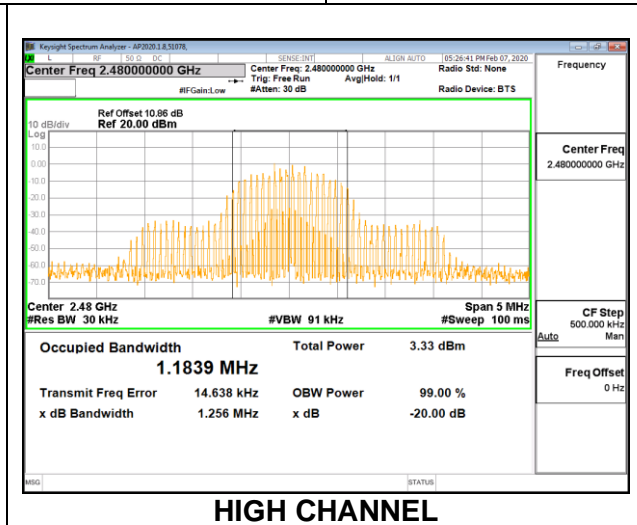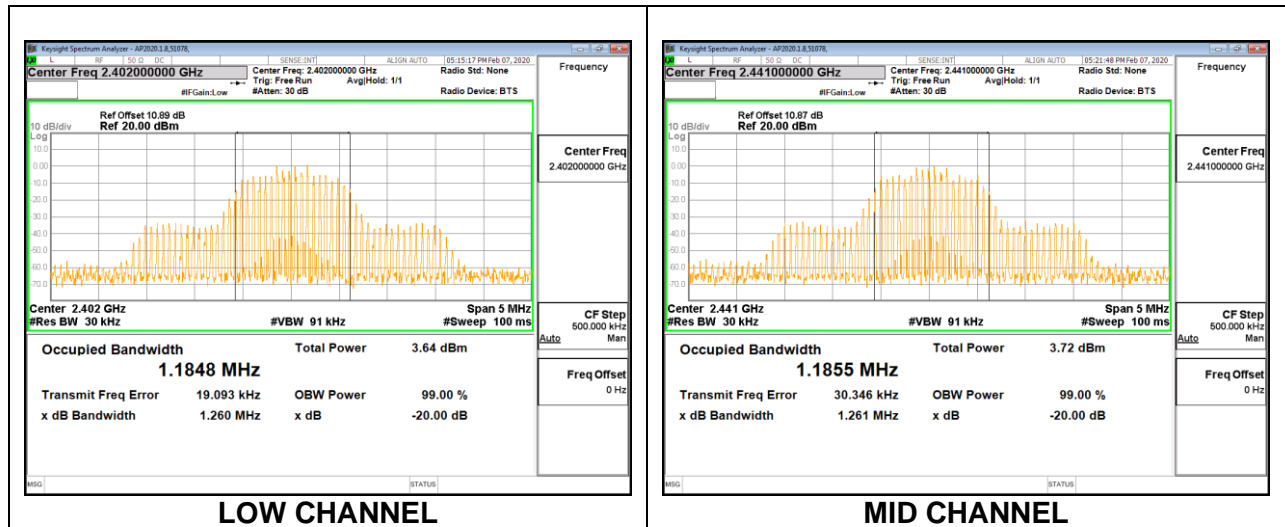

---

## 10. ANTENNA PORT TEST RESULTS

### 10.1. HOPPING FREQUENCY SEPARATION

#### LIMITS

FCC §15.247 (a) (1)

RSS-247 (5.1) (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to  $VBW \geq RBW$ . The sweep time is coupled.

#### RESULTS

### 10.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

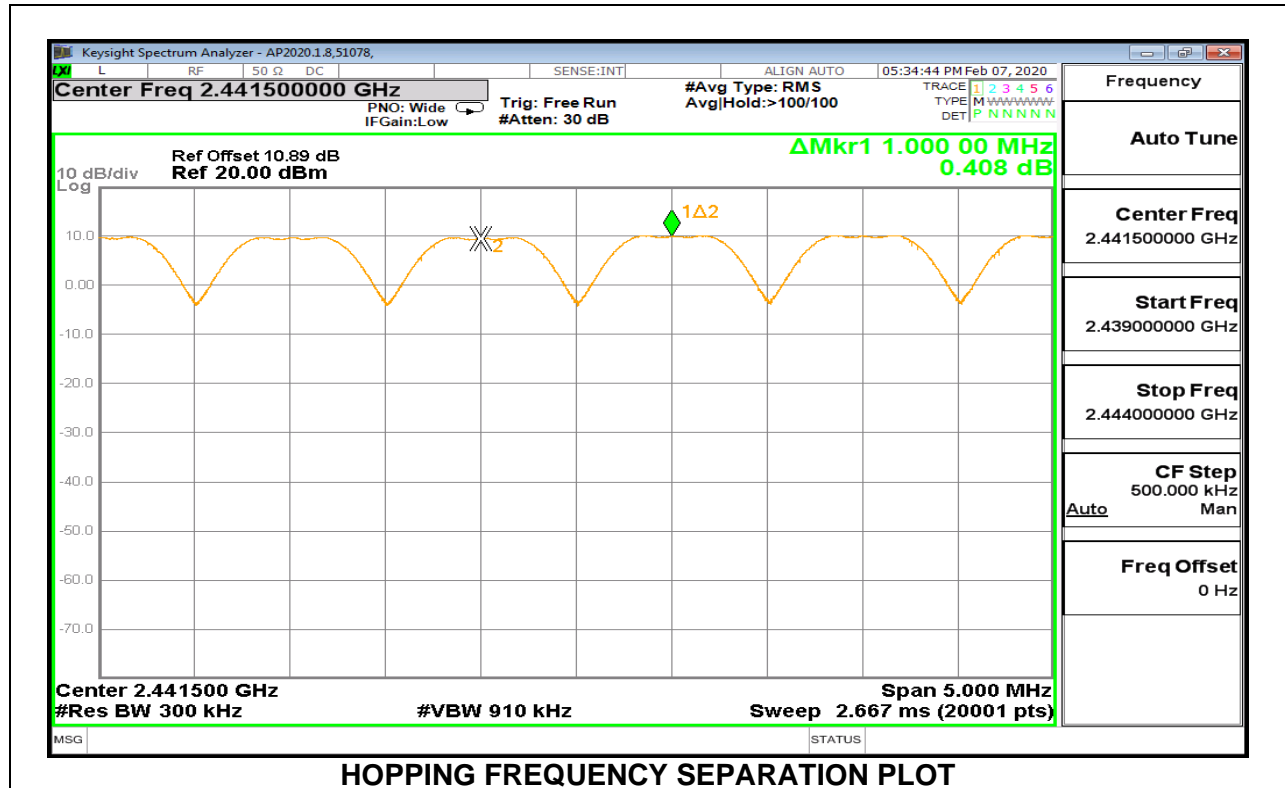

## 10.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

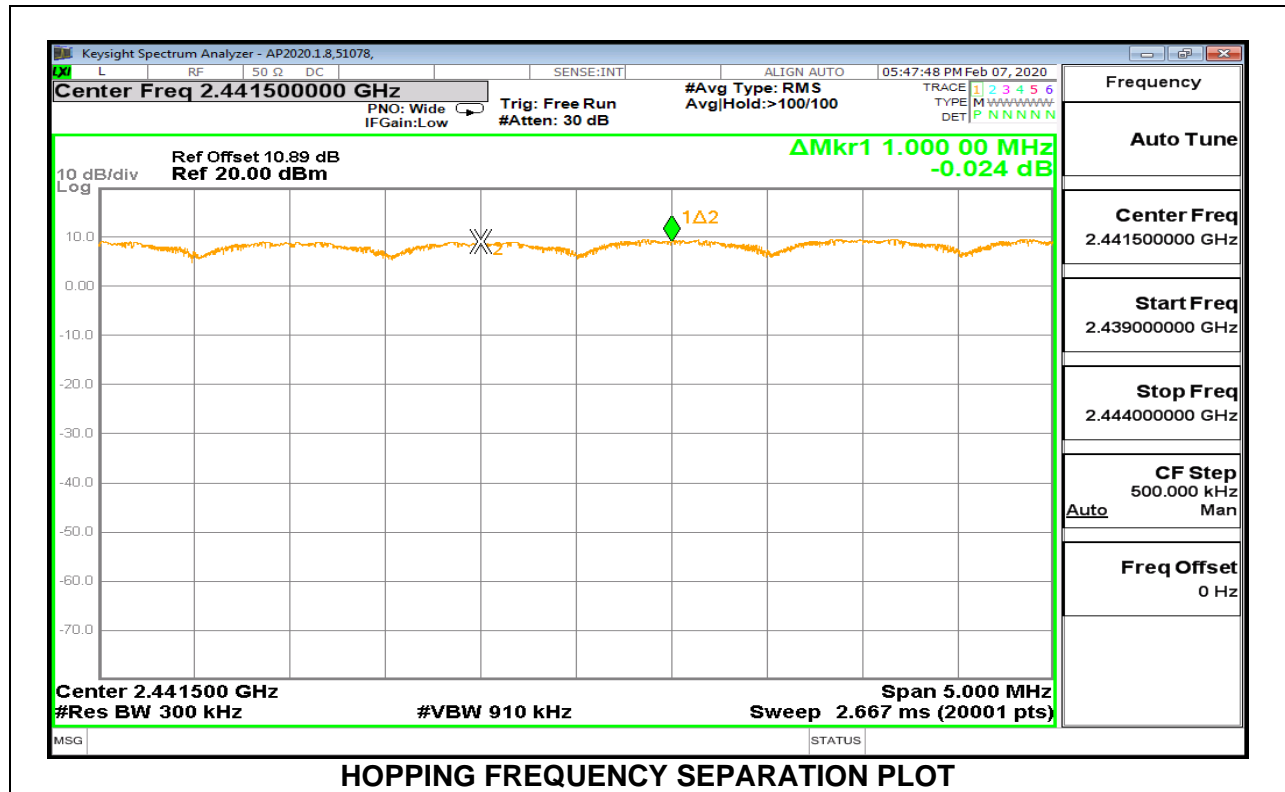

---

## **10.2. NUMBER OF HOPPING CHANNELS**

### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

### **RESULTS**



Normal Mode: 79 Channels Observed

### 10.2.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

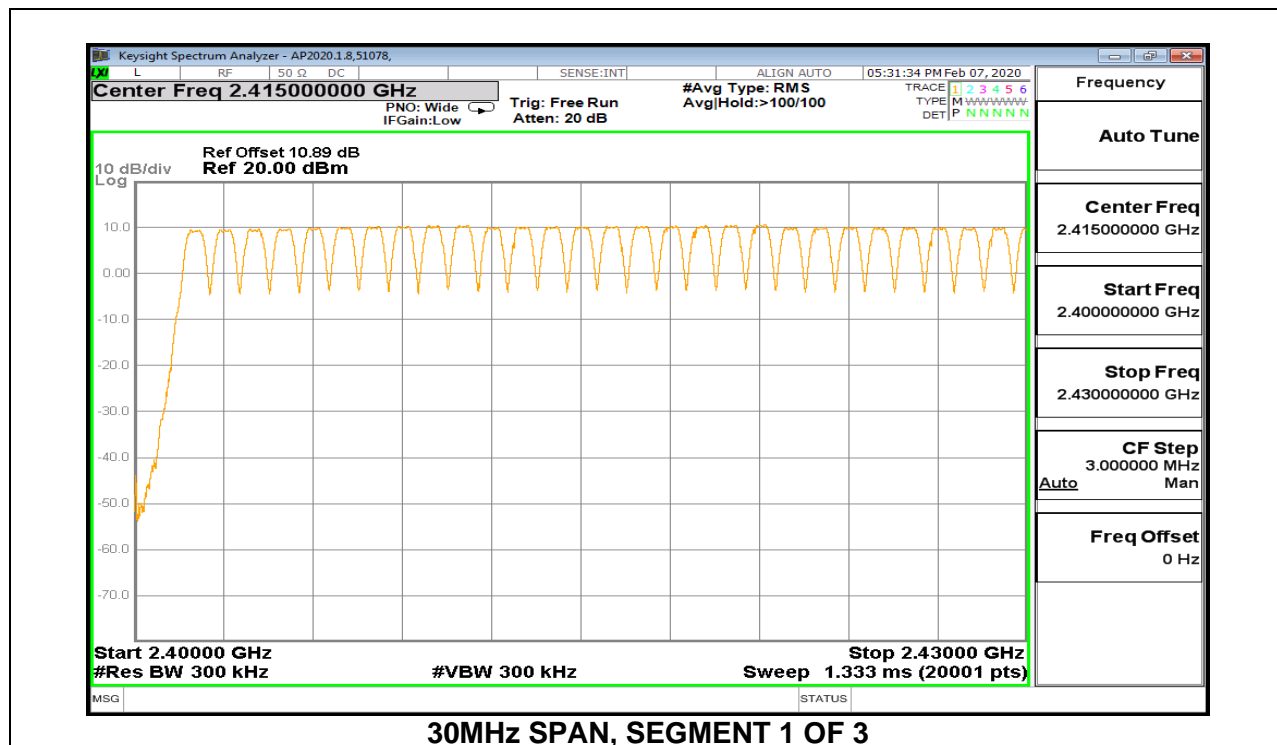
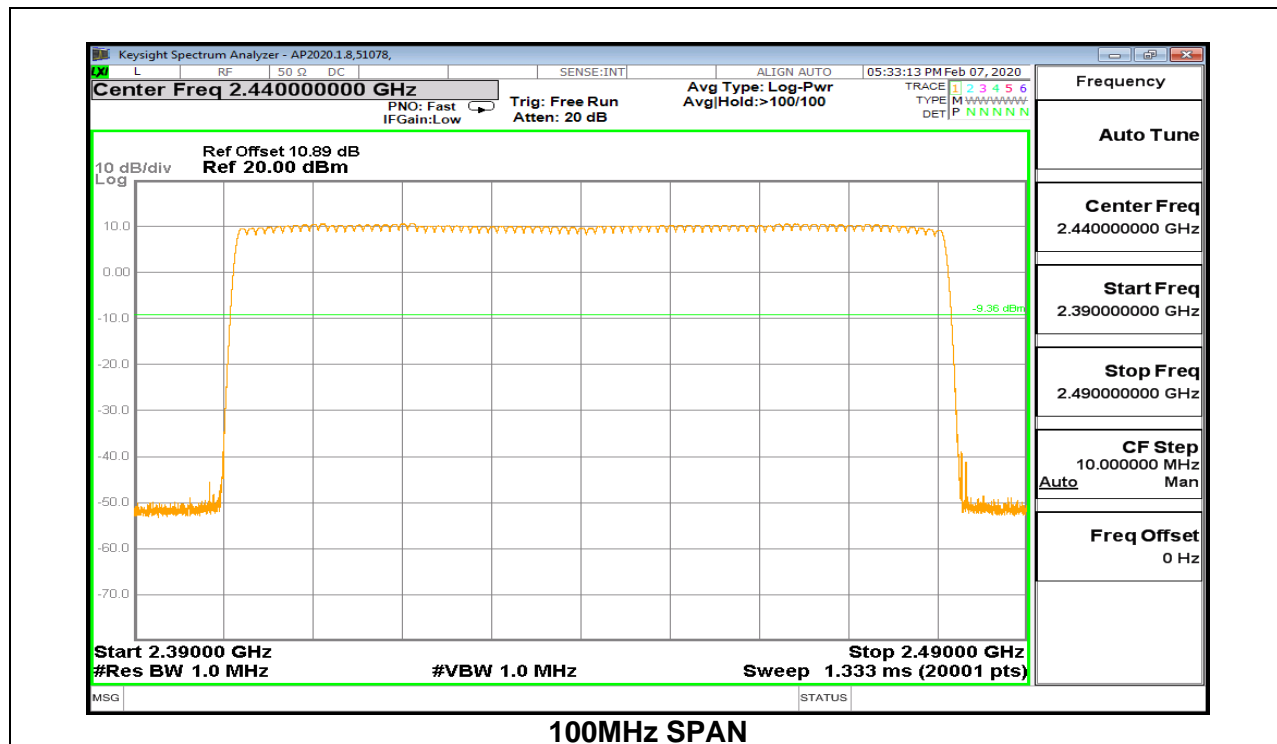


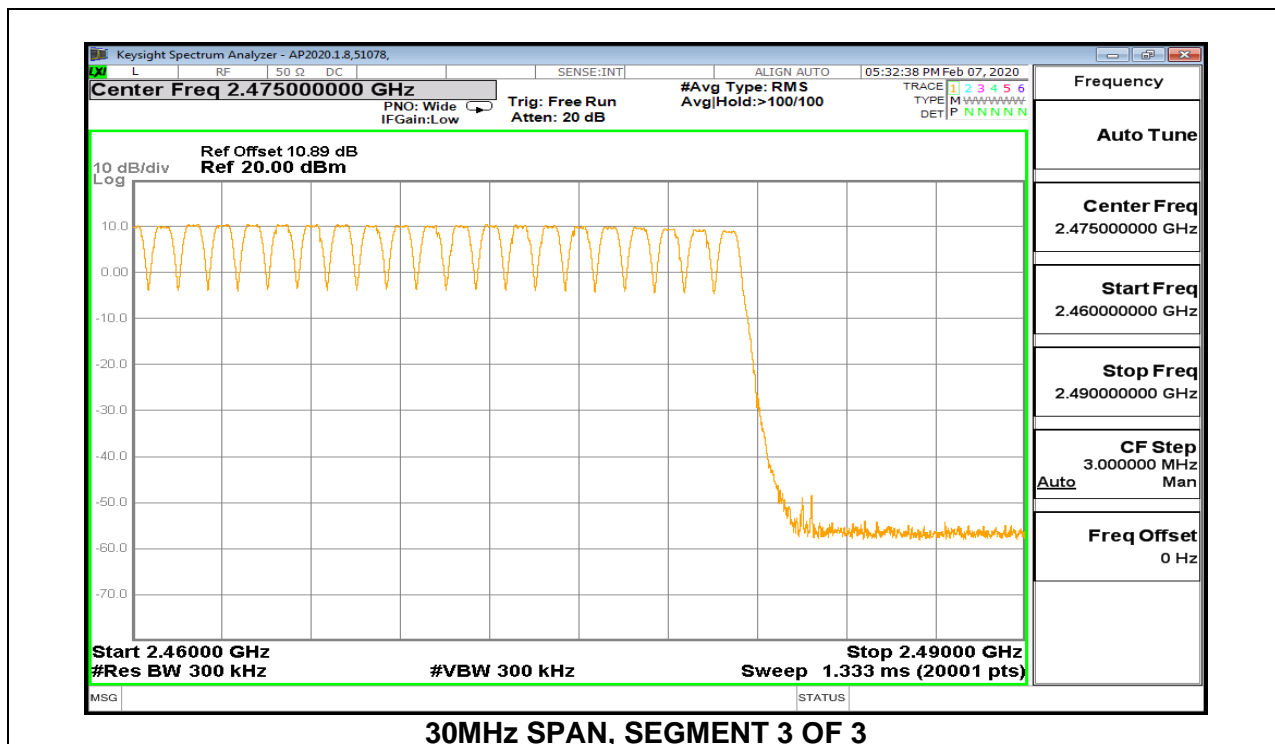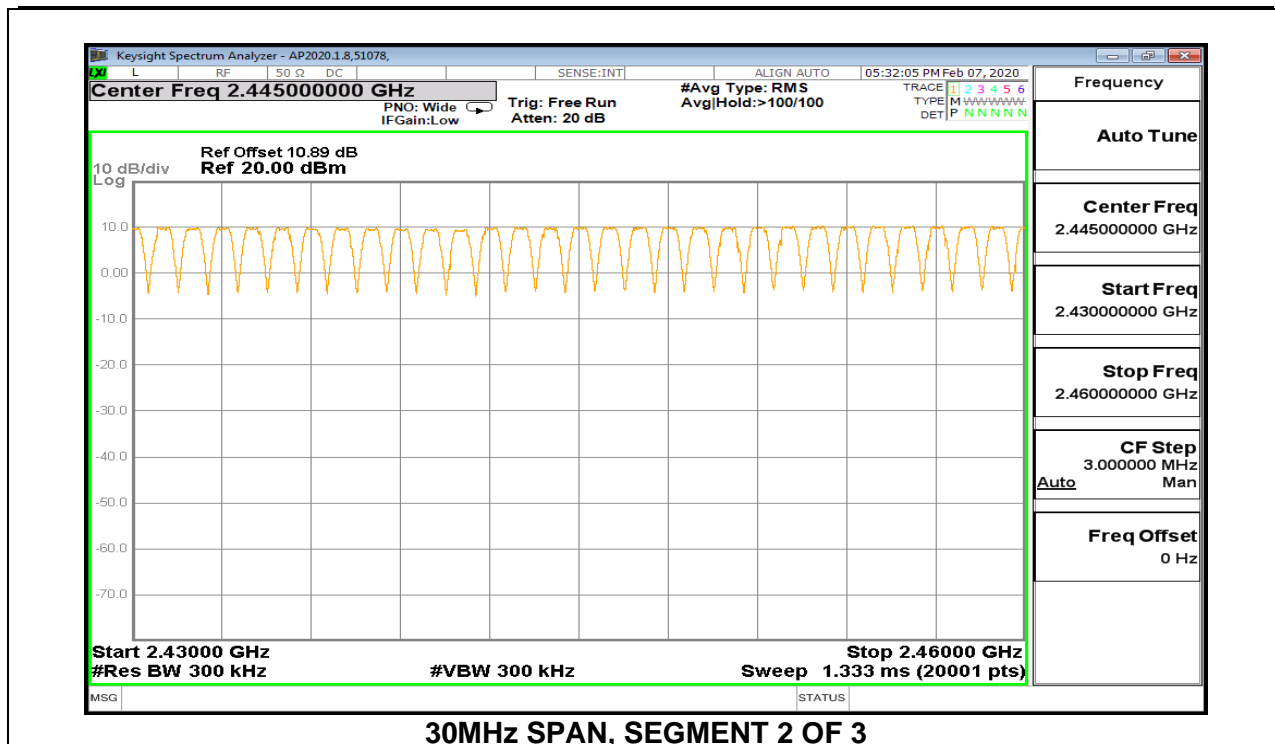

## 10.2.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

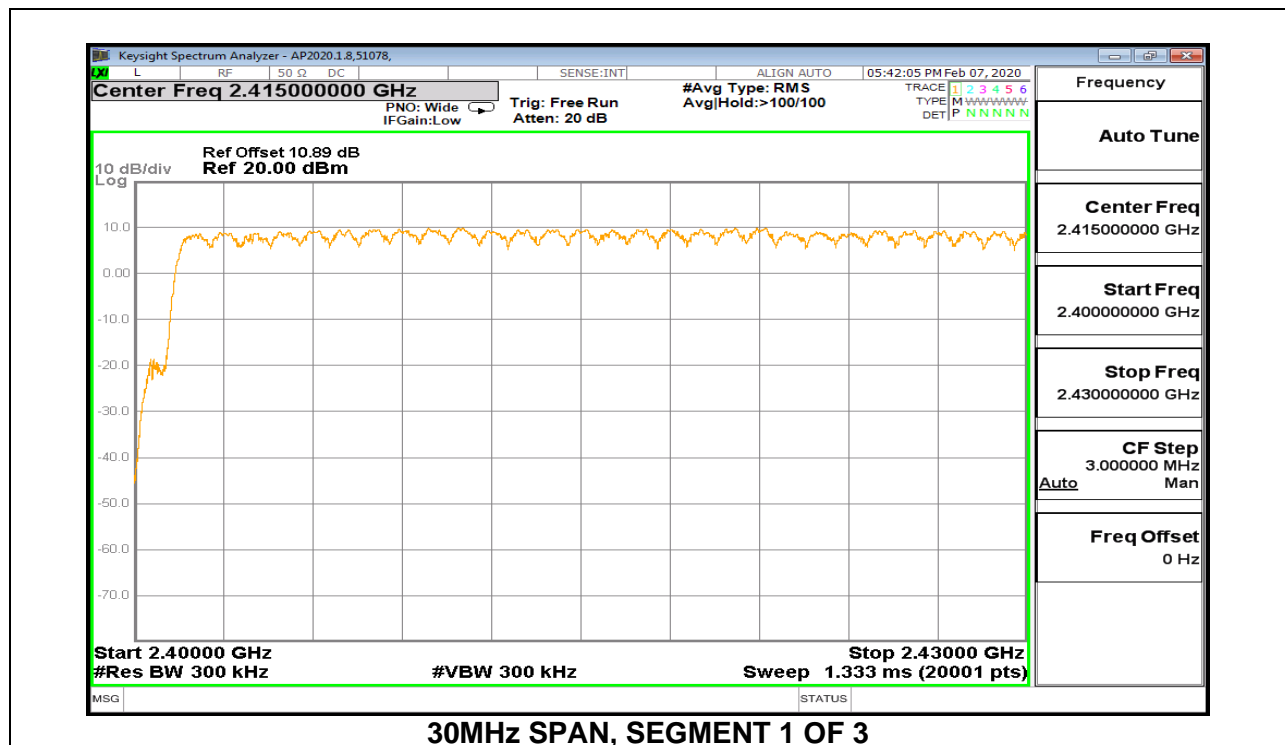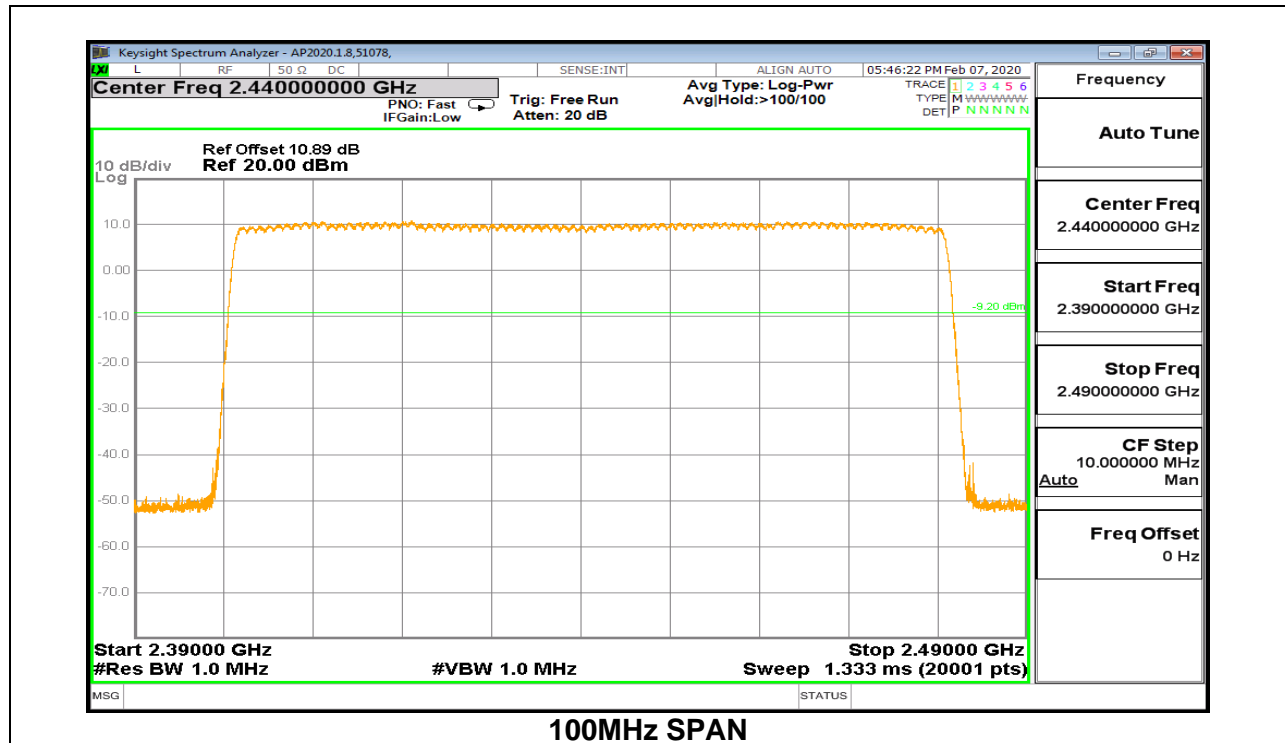



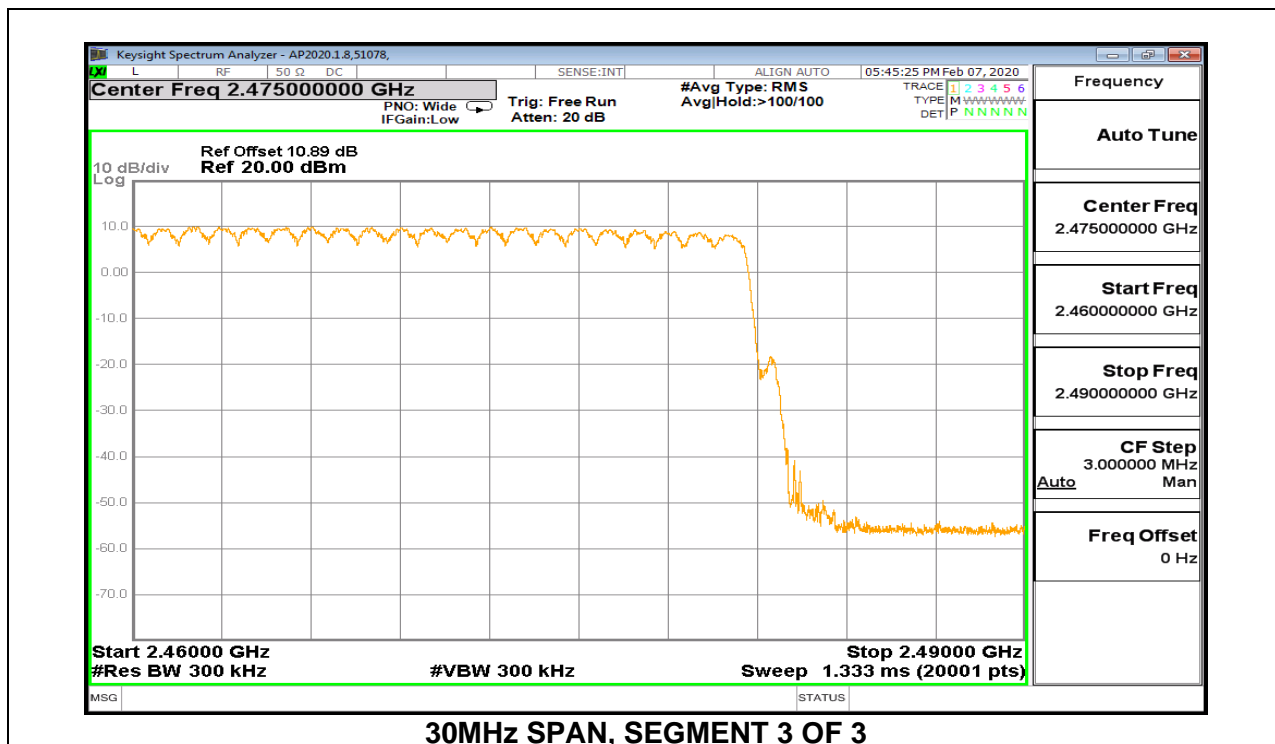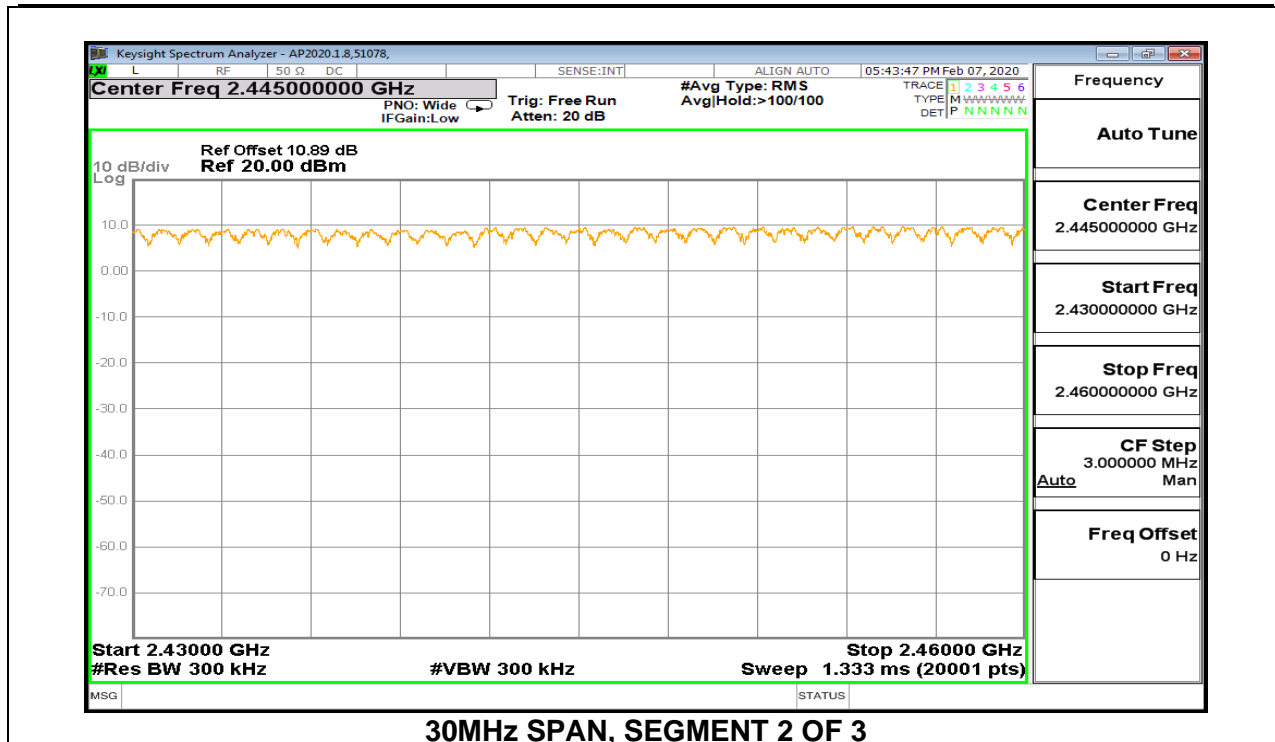

---

### **10.3. AVERAGE TIME OF OCCUPANCY**

#### **LIMITS**

FCC §15.247 (a) (1) (iii)

RSS-247 (5.1) (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 3.16 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .

#### **RESULTS**


**10.3.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION**

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.381	32	0.1219	0.4	-0.2781
DH3	1.636	13	0.2127	0.4	-0.1873
DH5	2.884	6	0.1730	0.4	-0.2270
<b>GFSK AFH Mode</b>					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.381	8	0.03048	0.4	-0.3695
DH3	1.636	3.25	0.05317	0.4	-0.3468
DH5	2.884	1.5	0.04326	0.4	-0.3567

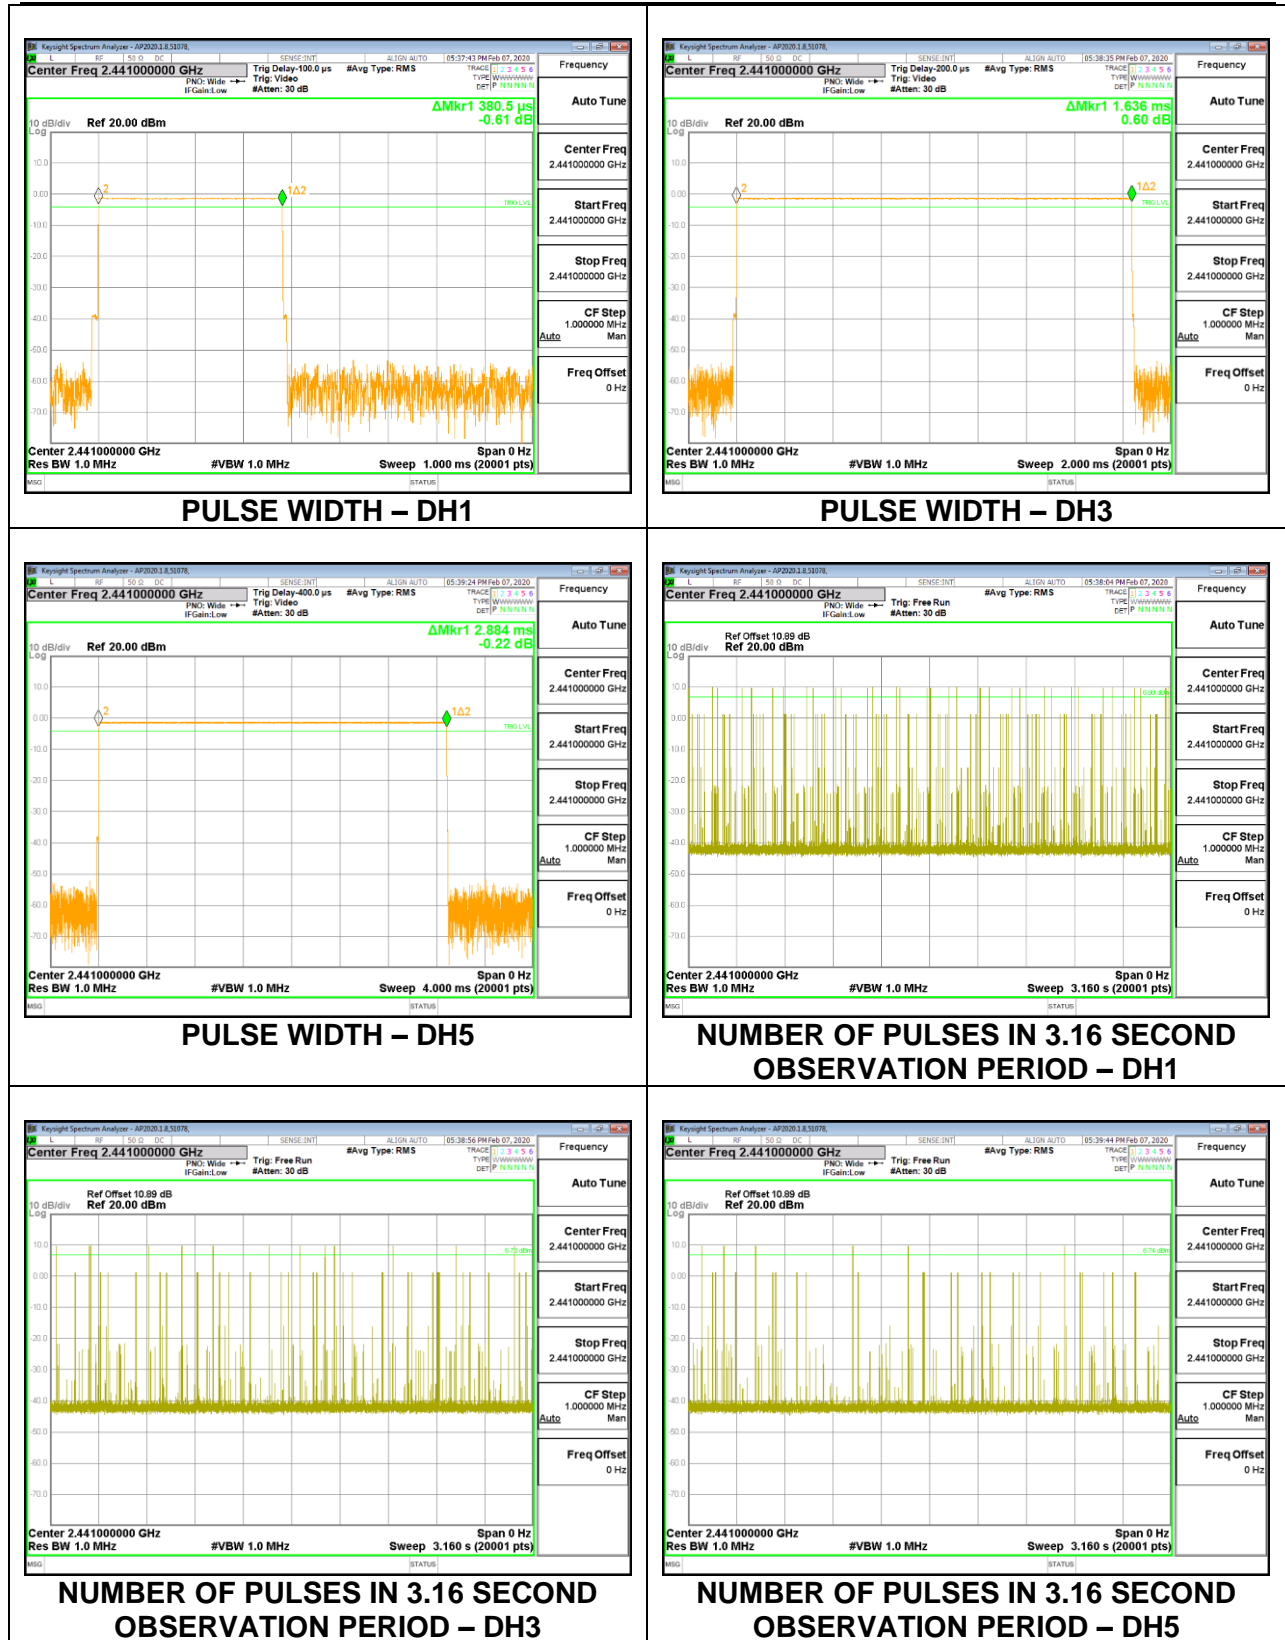

**10.3.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION**

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>8PSK Normal Mode</b>					
DH1	0.386	32	0.1235	0.4	-0.2765
DH3	1.637	14	0.2292	0.4	-0.1708
DH5	2.888	14	0.4043	0.4	0.0043
<b>8PSK AFH Mode</b>					
DH Packet	Pulse Width (sec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.386	8	0.03088	0.4	-0.3691
DH3	1.637	3.5	0.05730	0.4	-0.3427
DH5	2.888	3.5	0.10108	0.4	-0.2989

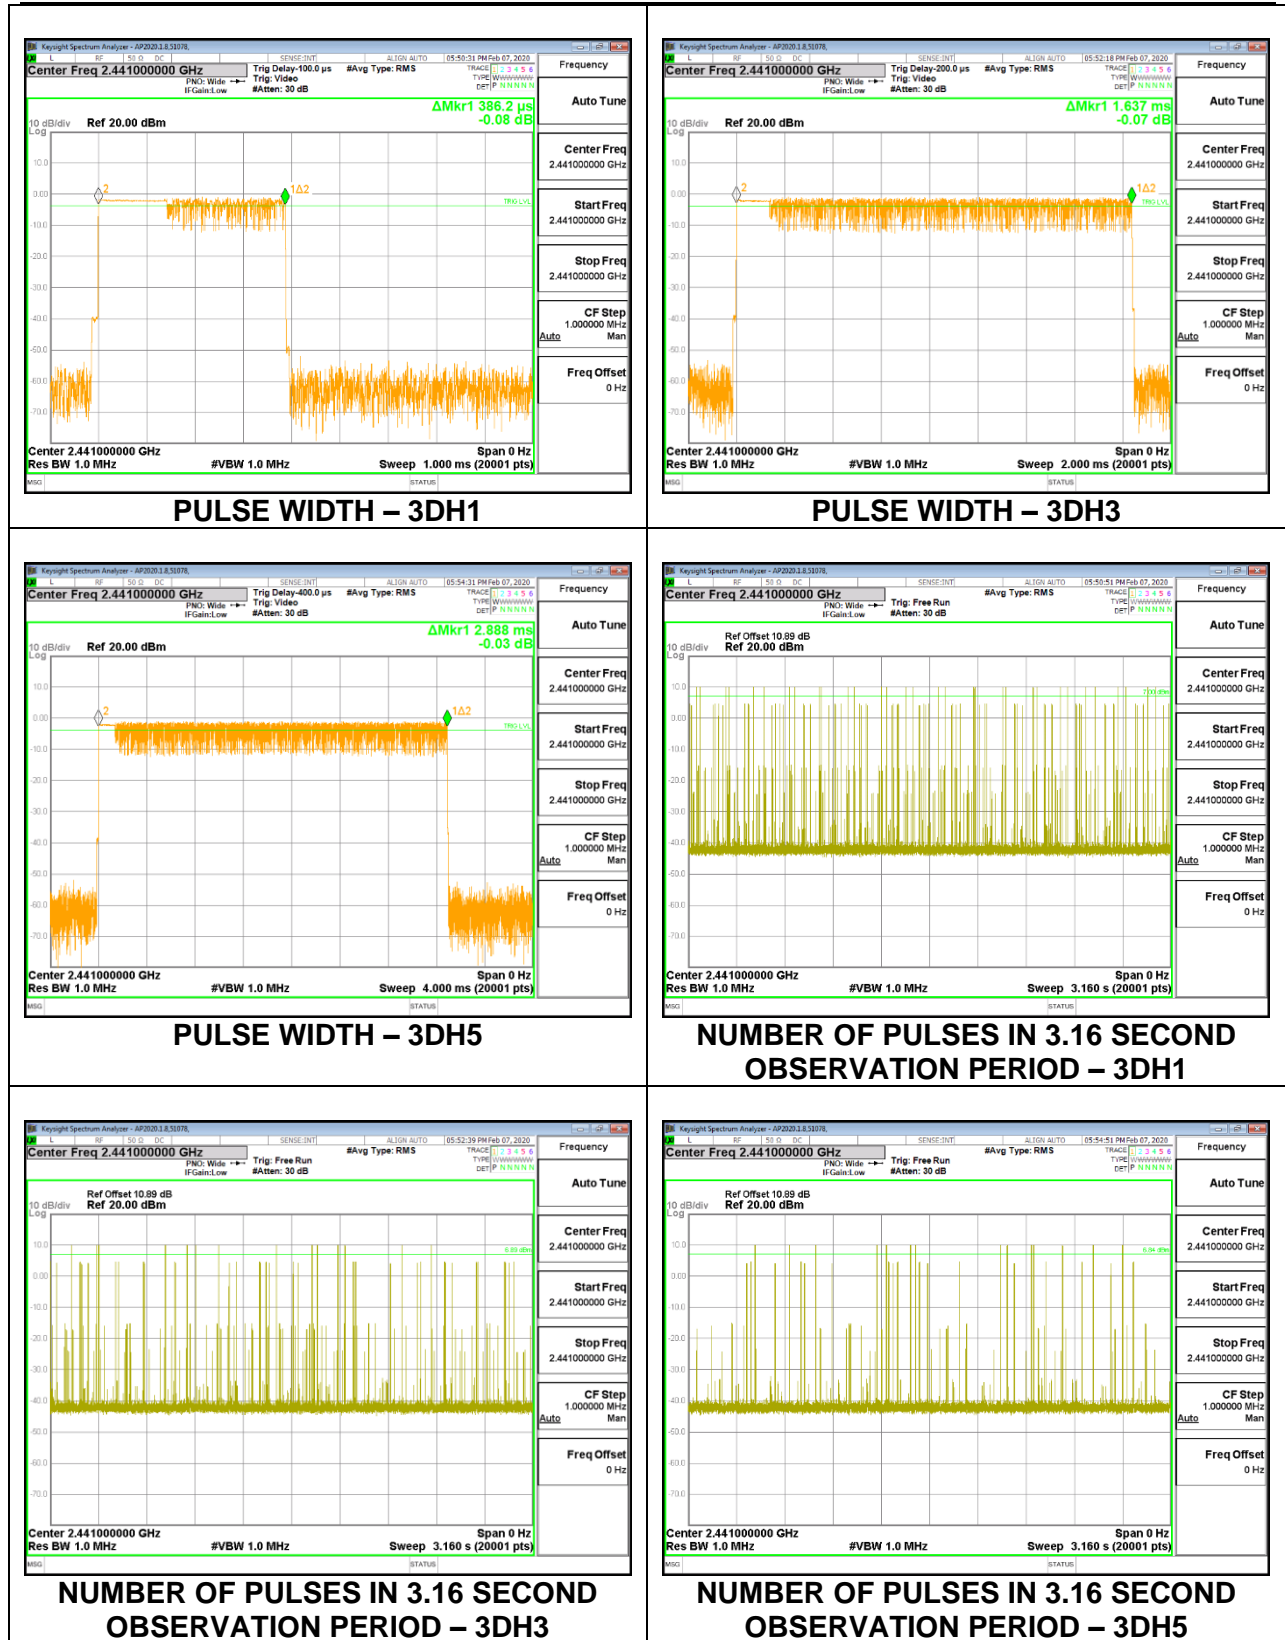

## 10.4. OUTPUT POWER

### LIMITS

§15.247 (b) (1)

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

#### 10.4.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	9.564	21.000	-11.436
Mid	2 441	<b>9.763</b>	<b>21.000</b>	<b>-11.237</b>
High	2 480	9.200	21.000	-11.800
Worst		9.763	21.000	-11.237

#### 10.4.2. ENHANCED DATA RATE Pi/4-DPSK MODULATION


Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	10.020	21.000	-10.980
Mid	2 441	<b>10.279</b>	<b>21.000</b>	<b>-10.721</b>
High	2 480	9.596	21.000	-11.404
Worst		10.279	21.000	-10.721

#### 10.4.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	Output Power [dBm]	Limit [dBm]	Margin [dB]
Low	2 402	10.116	21.000	-10.884
Mid	2 441	<b>10.374</b>	<b>21.000</b>	<b>-10.626</b>
High	2 480	9.742	21.000	-11.258
Worst		10.374	21.000	-10.626


### 10.4.4. OUTPUT POWER PLOTS

#### GFSK OUTPUT POWER

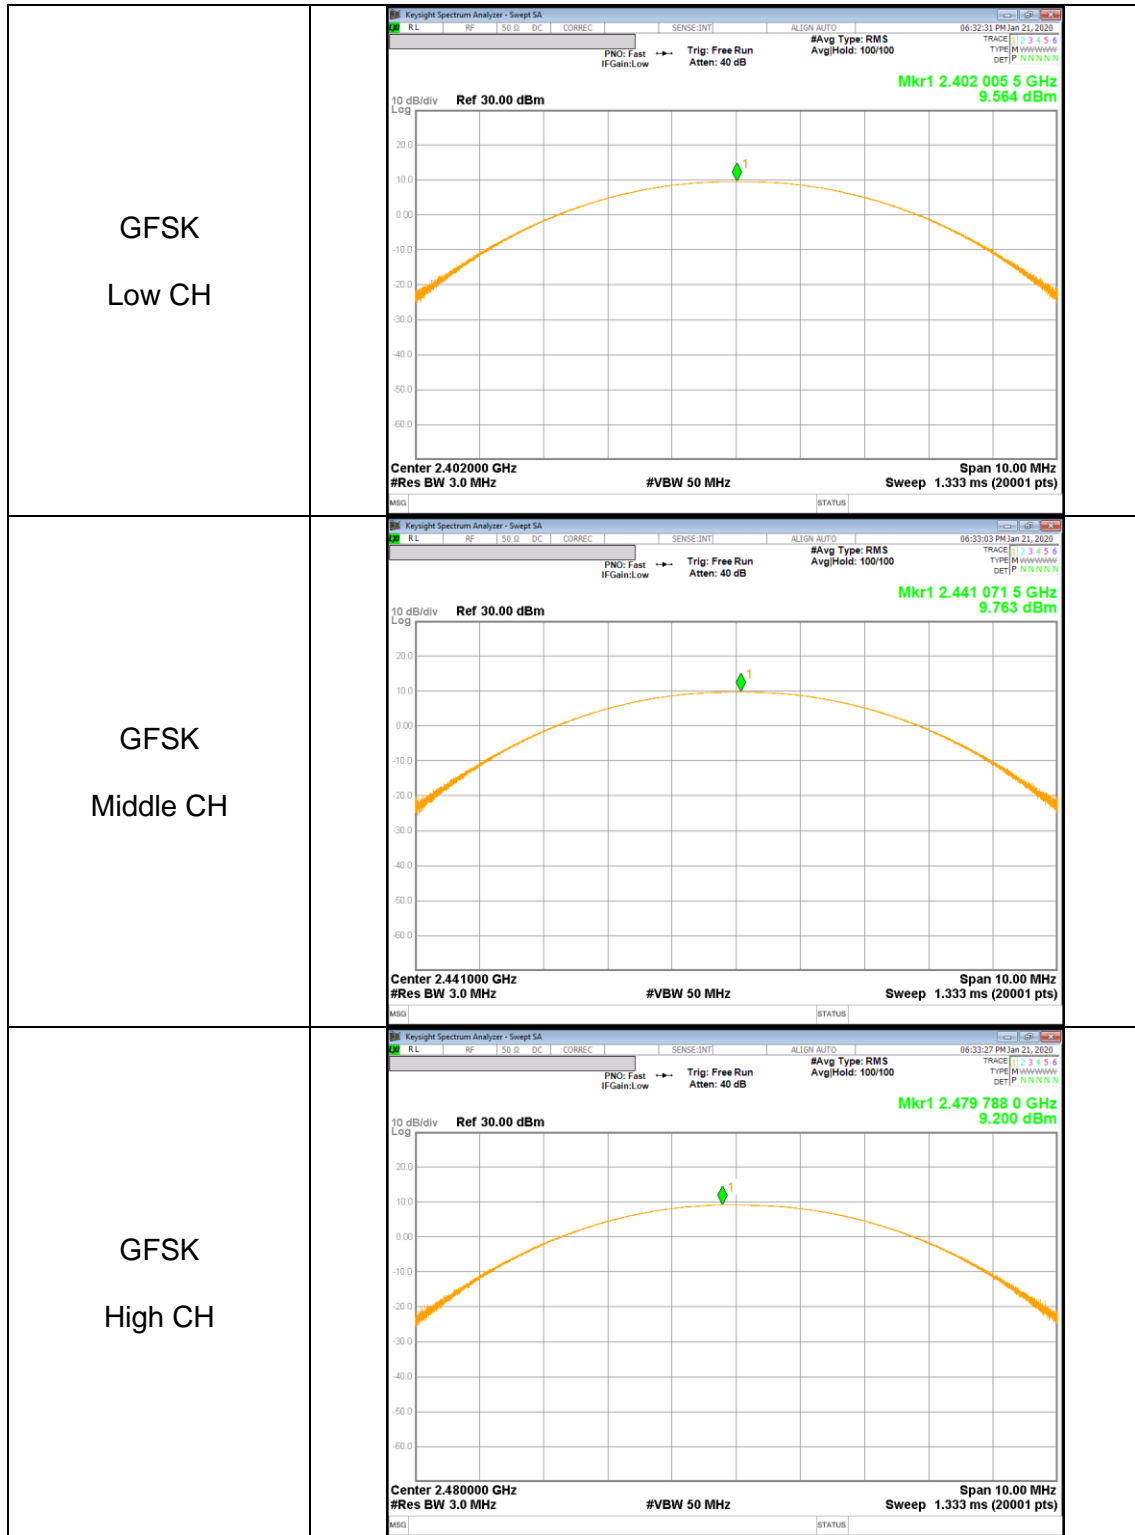




**Pi/4-DPSK OUTPUT POWER**

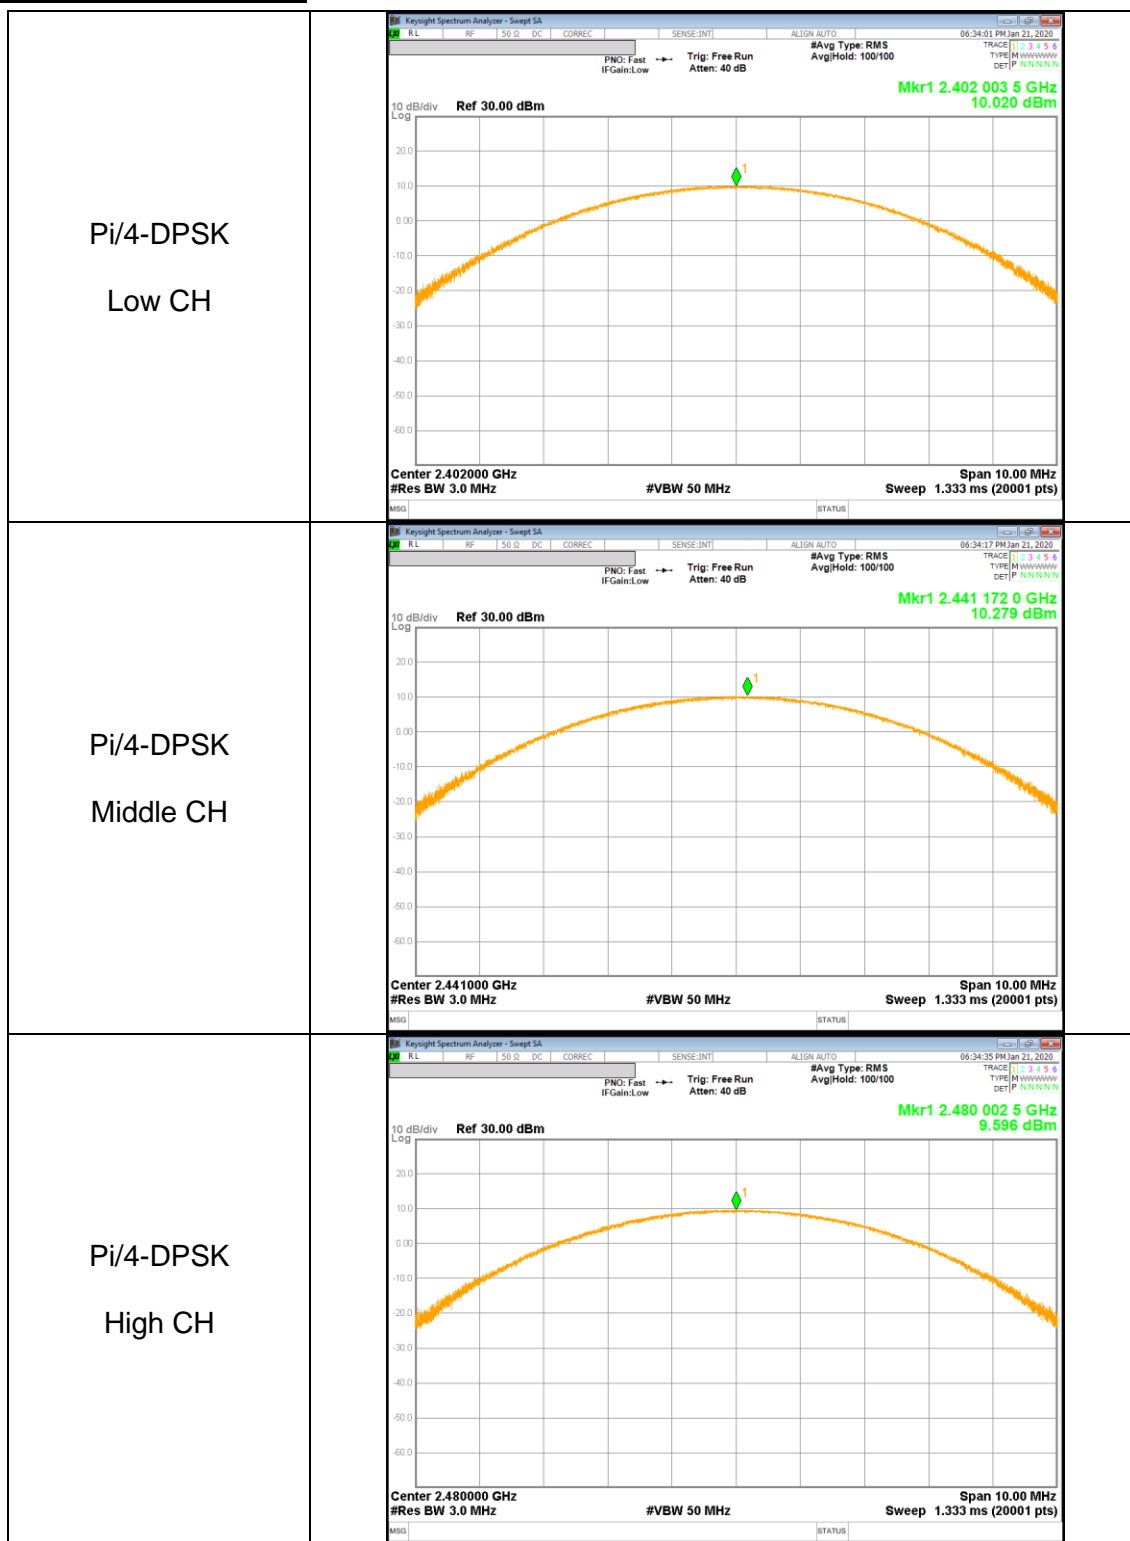

**8PSK OUTPUT POWER**

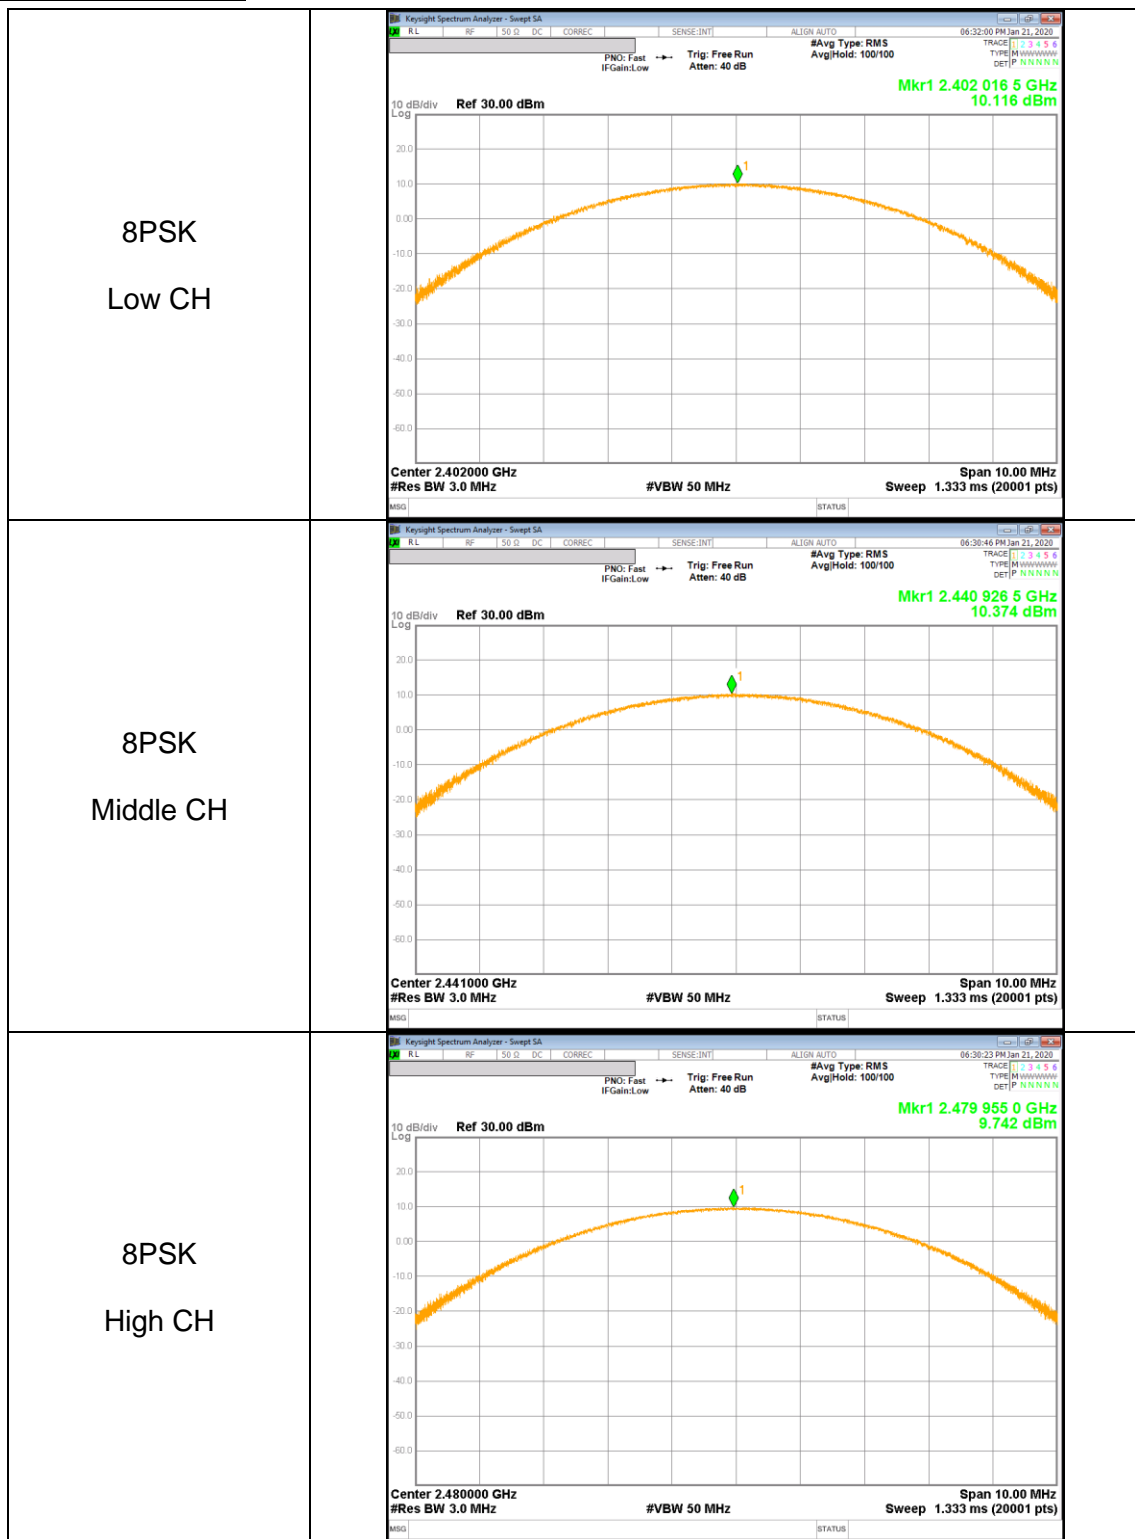

## 10.5. AVERAGE POWER

### LIMITS

None; for reporting purposes only

### TEST PROCEDURE

The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss was entered as an offset in the power meter to allow for direct reading of power.

#### 10.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	9.320	8.550
Middle	2 441	<b>9.460</b>	<b>8.831</b>
High	2 480	8.867	7.704

#### 10.5.2. ENHANCED DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	8.245	6.676
Middle	2 441	<b>8.311</b>	<b>6.779</b>
High	2 480	7.805	6.032

#### 10.5.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency [MHz]	AV power [dBm]	AV power [mW]
Low	2 402	8.259	6.697
Middle	2 441	<b>8.336</b>	<b>6.818</b>
High	2 480	7.818	6.051

---

## **10.6. CONDUCTED SPURIOUS EMISSIONS**

### **LIMITS**

FCC §15.247 (d)

RSS-247 5.5

Limit = -20 dBc

### **TEST PROCEDURE**

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.


### **RESULTS**

## 10.6.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

### Antenna 1 SPURIOUS EMISSIONS, NON-HOPPING

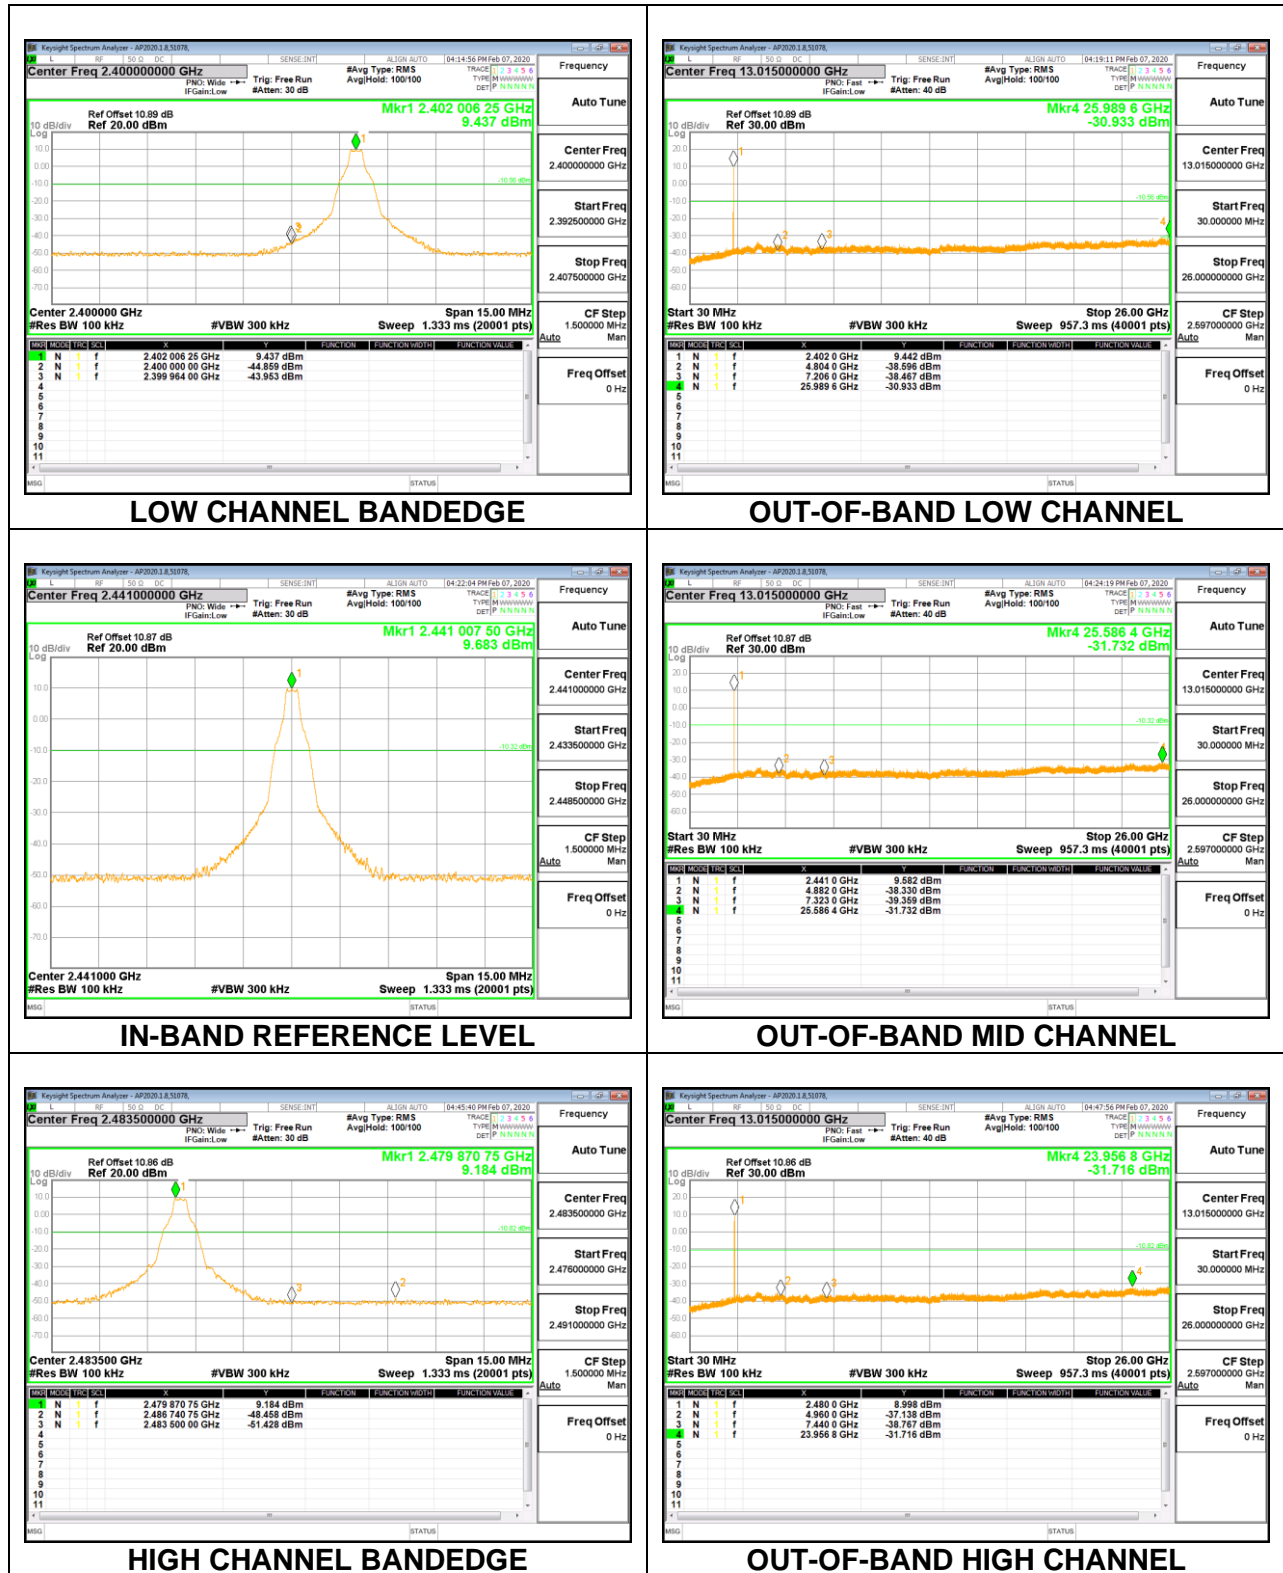


**Antenna 1 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

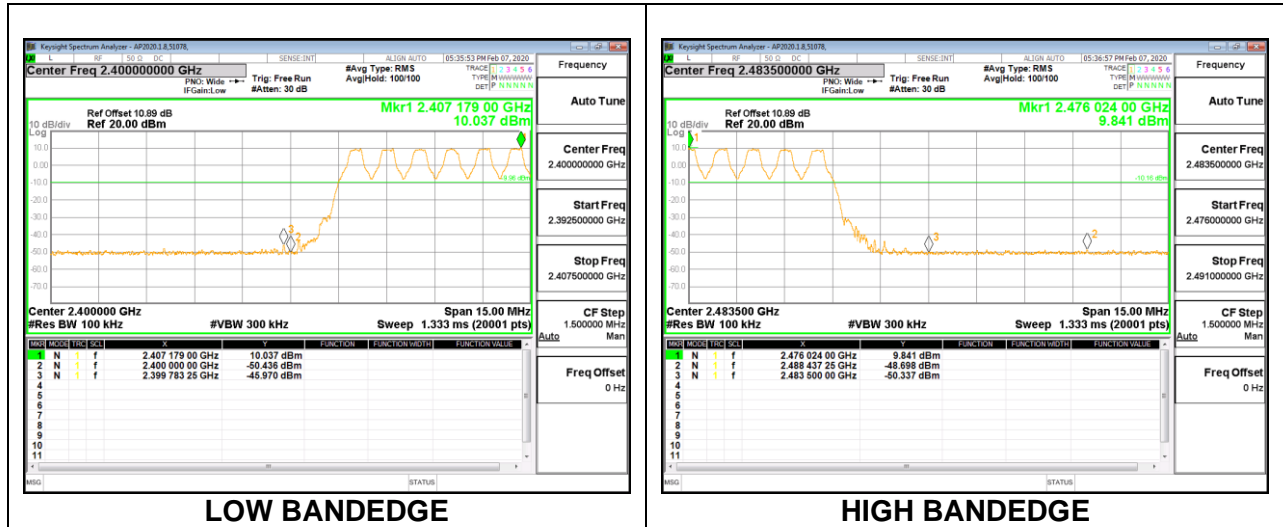


## 10.6.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### Antenna 1 SPURIOUS EMISSIONS, NON-HOPPING

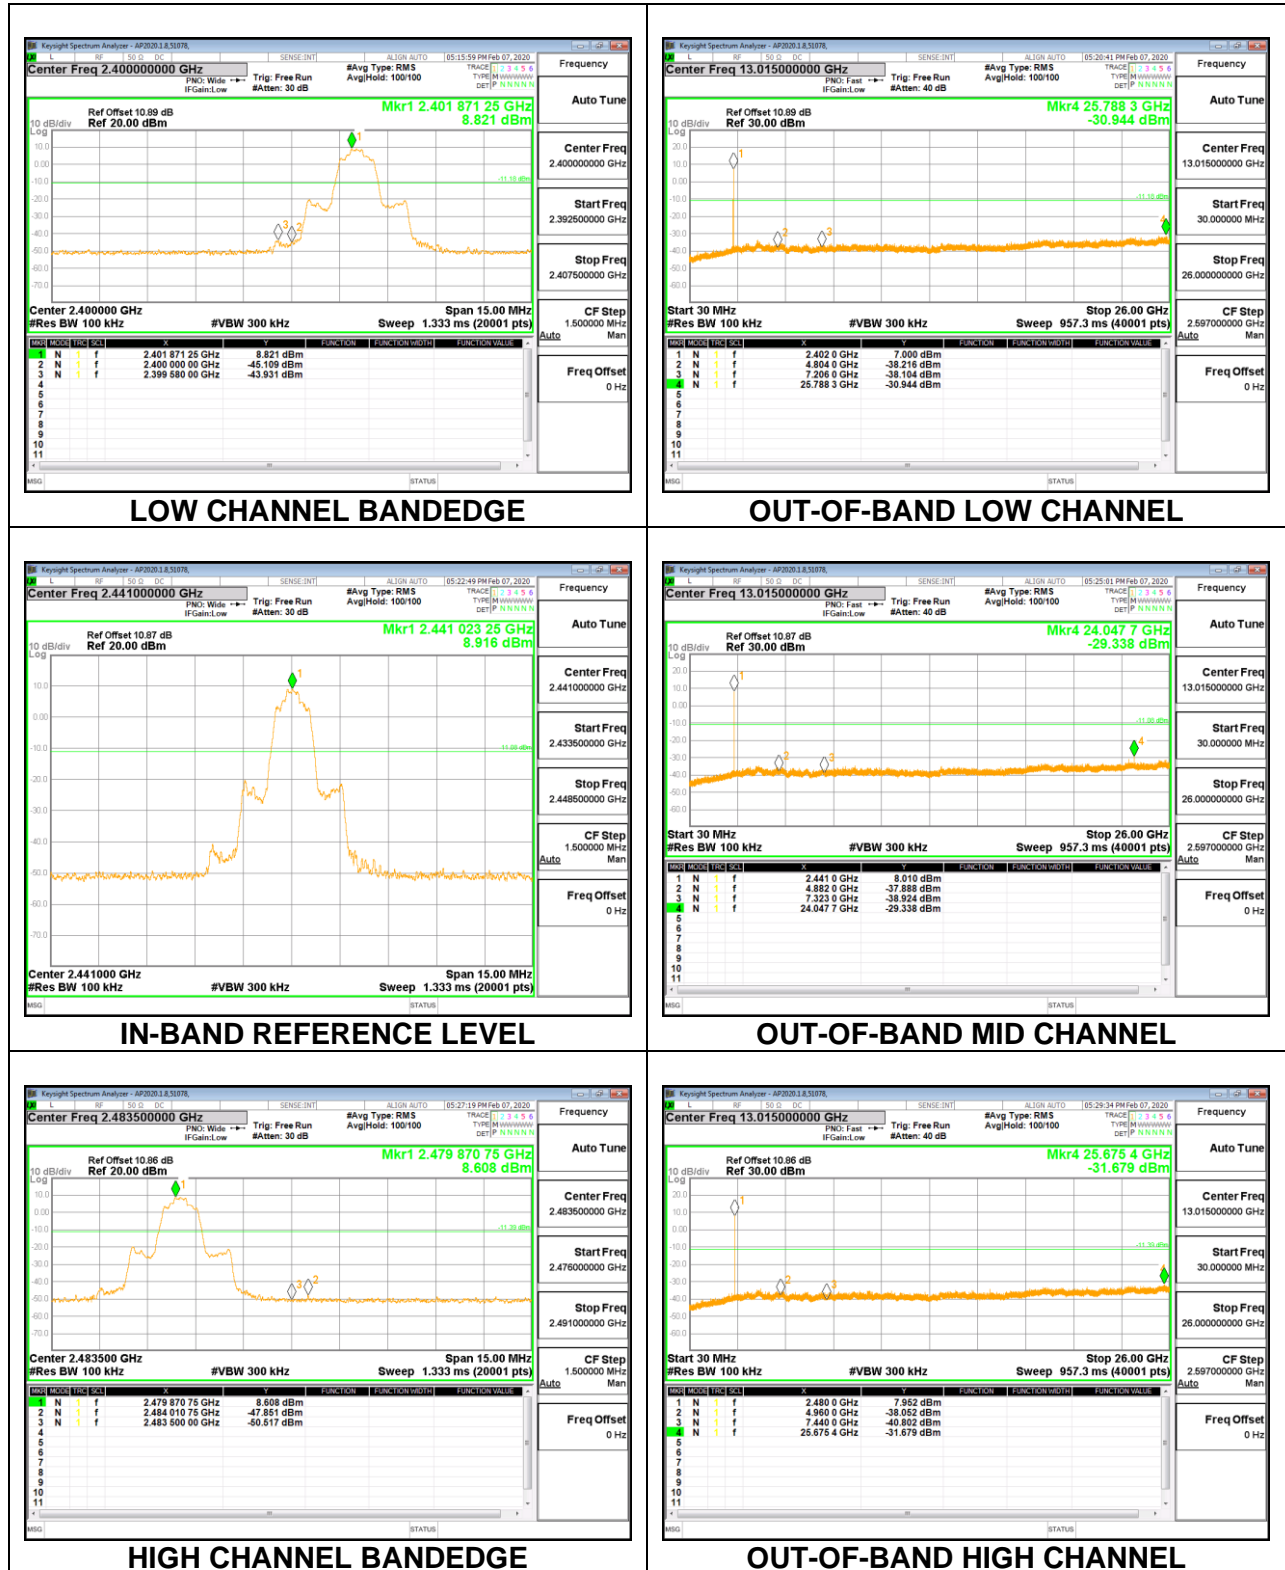

**Antenna 1 SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

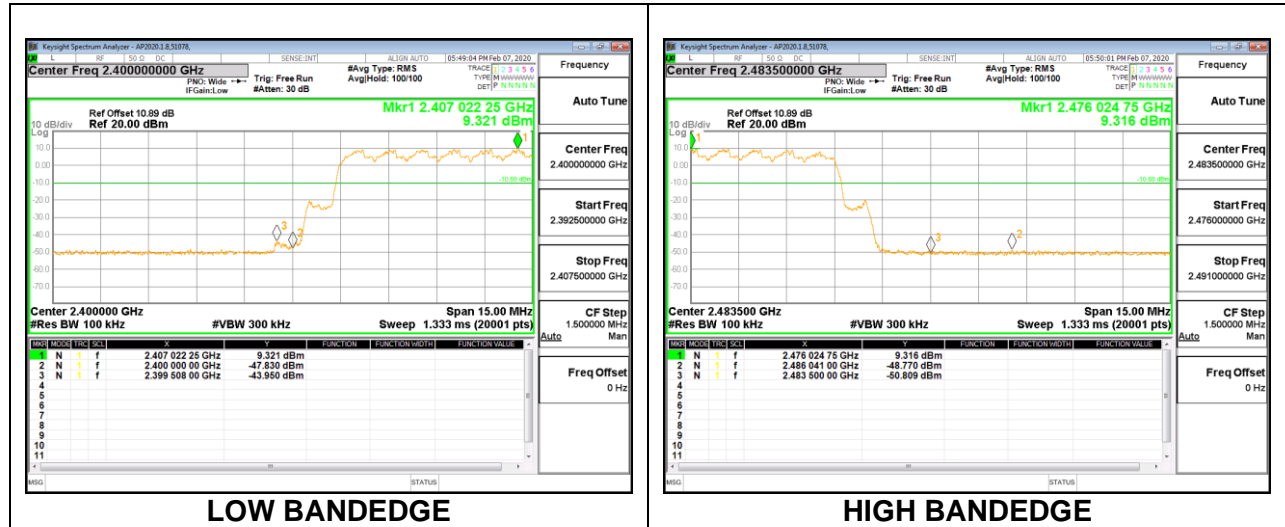



# 11. RADIATED TEST RESULTS

## LIMITS

FCC §15.205 and §15.209

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC Part 15.205 (a) : Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	MHz	GHz	GHz
0.009 – 0.110	8.41425 ~ 8.41475	108 ~ 121.94	1300 ~ 1427	4.5 ~ 5.15	14.47 ~ 14.5
0.495 – 0.505	12.29 ~ 12.293	123 ~ 138	1435 ~ 1626.5	5.35 ~ 5.46	15.35 ~ 16.2
2.1735 ~ 2.1905	12.51975 ~ 12.52025	149.9 ~ 150.05	1645.5 ~ 1646.5	7.25 ~ 7.75	17.7 ~ 21.4
4.125 ~ 4.128	12.57675 ~ 12.57725	156.52475 ~	1660 ~ 1710	8.025 ~ 8.5	22.01 ~ 23.12
4.17725 ~ 4.17775	13.36 ~ 13.41	156.52525	1718.8 ~ 1722.2	9.0 ~ 9.2	23.6 ~ 24.0
4.20725 ~ 4.20775	16.42 ~ 16.423	156.7 ~ 156.9	2200 ~ 2300	9.3 ~ 9.5	31.2 ~ 31.8
6.215 ~ 6.218	16.69475 ~ 16.69525	162.0125 ~	2310 ~ 2390	10.6 ~ 12.7	36.43 ~ 36.5
6.26775 ~ 6.26825	16.80425 ~ 16.80475	167.17	2483.5 ~ 2500	13.25 ~ 13.4	Above 38.6
6.31175 ~ 6.31225	25.5 ~ 25.67	167.72 ~ 173.2	2655 ~ 2900		
8.291 ~ 8.294	37.5 ~ 38.25	240 ~ 285	3260 ~ 3267		
8.362 ~ 8.366	73 ~ 74.6	322 ~ 335.4	3332 ~ 3339		
8.37625 ~ 8.38675	74.8 ~ 75.2	399.90 ~ 410	3345.8 ~ 3358		
		608 ~ 614	3600 ~ 4400		
		960 ~ 1240			

▪ FCC Part 15.205(b) : The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

---

**TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 3 MHz for peak measurements.(Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 kHz for peak measurements.)

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1/T (on time) for average measurement.

$$\text{GFSK} = 1/T = 1 / 0.002884\text{S} = 347\text{Hz}.$$

The minimum VBW was 347Hz, but test receiver(ESU40) couldn't set value 347Hz. Due to this reason, testing VBW was set to 500Hz(Worst cases).

The spectrum from 1GHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.  
(From 30MHz to 1GHz, test was performed with the EUT set to transmit at the channel with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Note : Emission was pre-scanned from 9kHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.

## 11.1. TRANSMITTER ABOVE 1 GHz

### 11.1.1. BLUETOOTH BASIC DATA RATE GFSK MODULATION

#### BANDEDGE (LOW CHANNEL)

#### HORIZONTAL RESULT

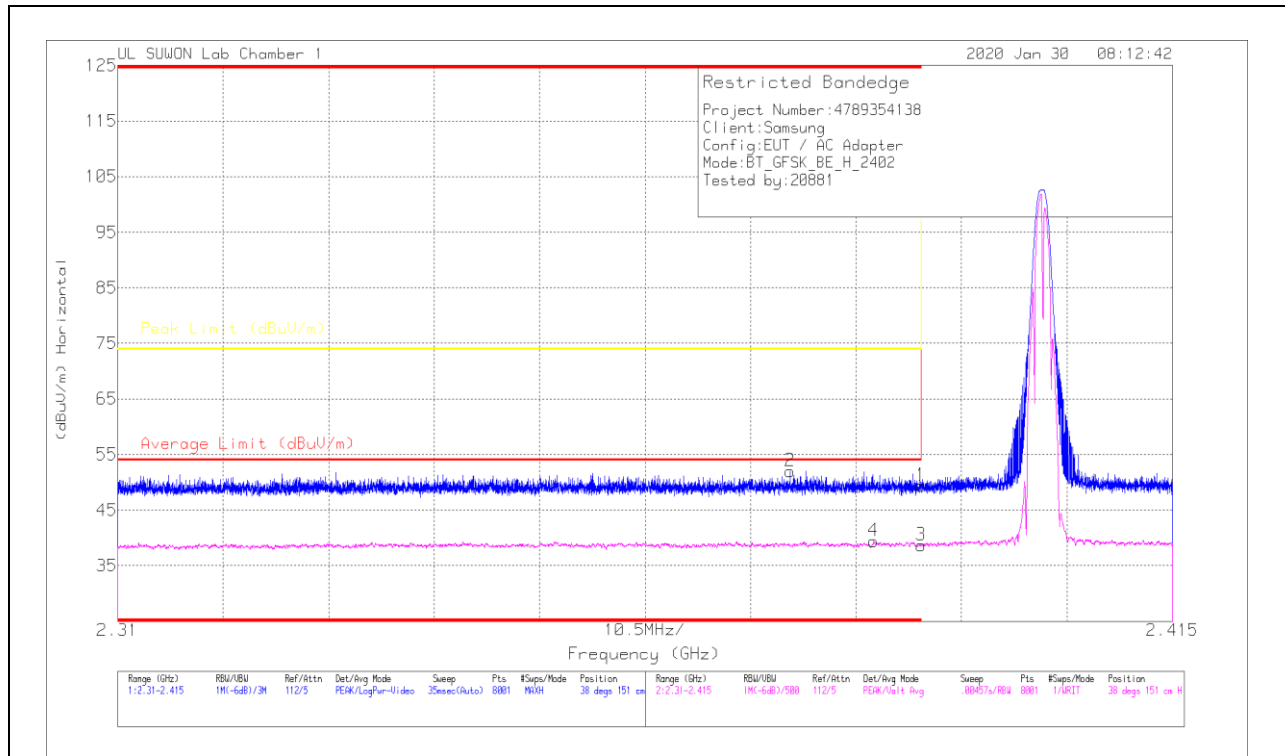


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	43.19	Pk	31.7	-25.5	49.39	-	-	74	-24.61	38	151	H
2	* 2.37694	46.03	Pk	31.6	-25.6	52.03	-	-	74	-21.97	38	151	H
3	* 2.39	32.49	VA1T	31.7	-25.5	38.69	54	-15.31	-	-	38	151	H
4	* 2.38526	33.16	VA1T	31.7	-25.5	39.36	54	-14.64	-	-	38	151	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

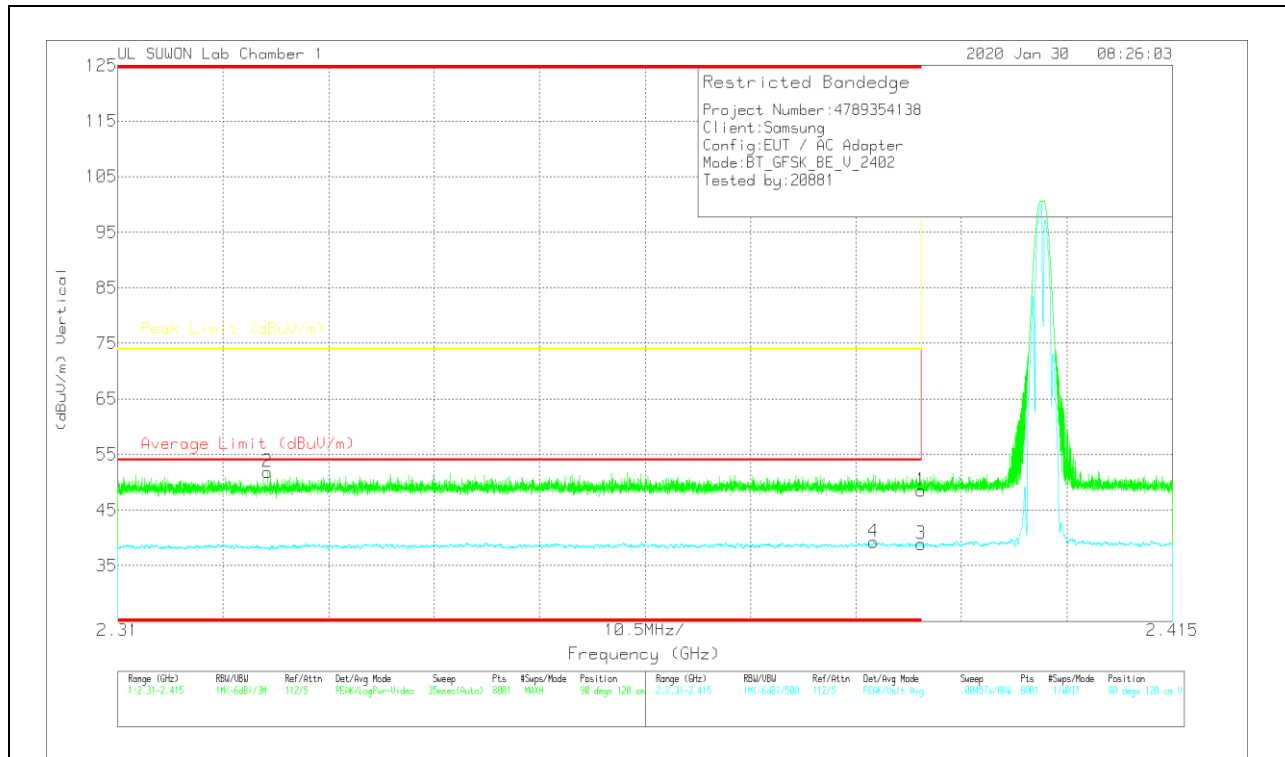

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.36	Pk	31.7	-25.5	48.56	-	-	74	-25.44	90	120	V
2	* 2.3249	46.15	Pk	31.5	-25.8	51.85	-	-	74	-22.15	90	120	V
3	* 2.39	32.66	VA1T	31.7	-25.5	38.86	54	-15.14	-	-	90	120	V
4	* 2.38526	33.14	VA1T	31.7	-25.5	39.34	54	-14.66	-	-	90	120	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

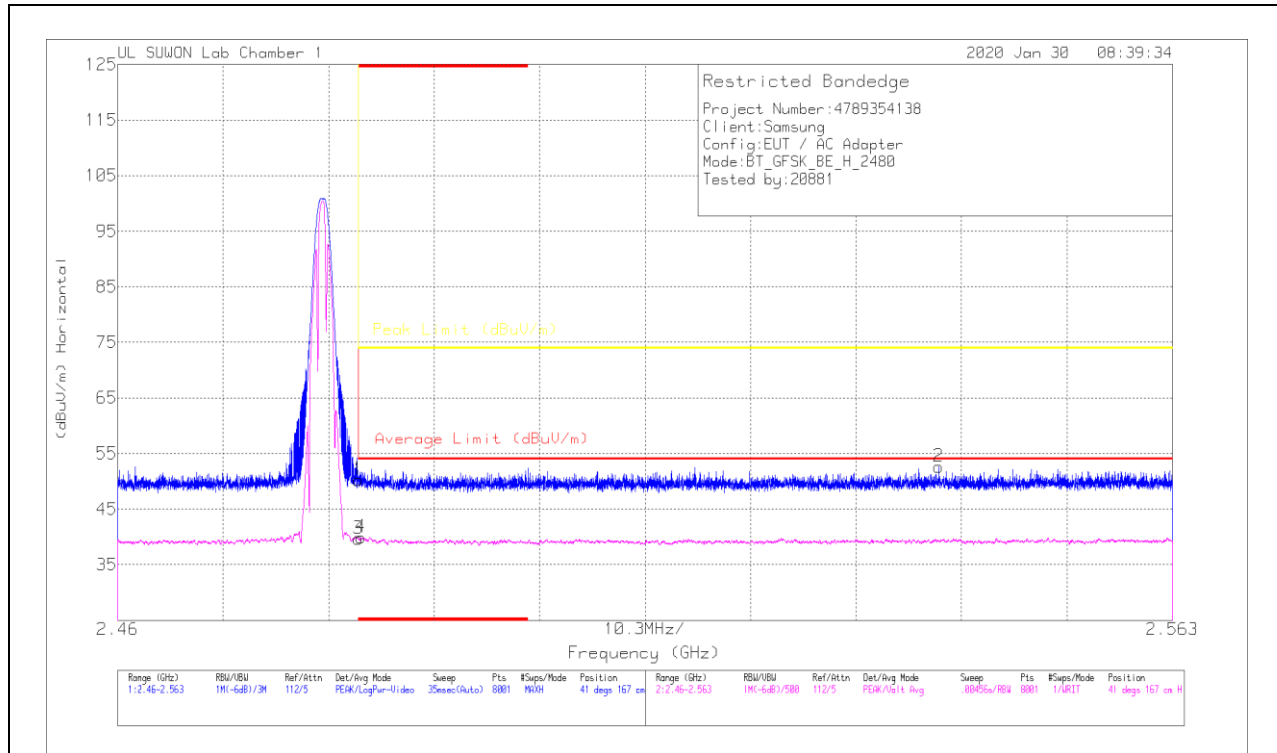


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.57	Pk	31.9	-25.2	50.27	-	-	74	-23.73	41	167	H
2	2.54019	45.61	Pk	32	-25	52.61	-	-	74	-21.39	41	167	H
3	* 2.48351	32.97	VA1T	31.9	-25.2	39.67	54	-14.33	-	-	41	167	H
4	* 2.48374	33.26	VA1T	31.9	-25.2	39.96	54	-14.04	-	-	41	167	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

**VERTICAL RESULT**


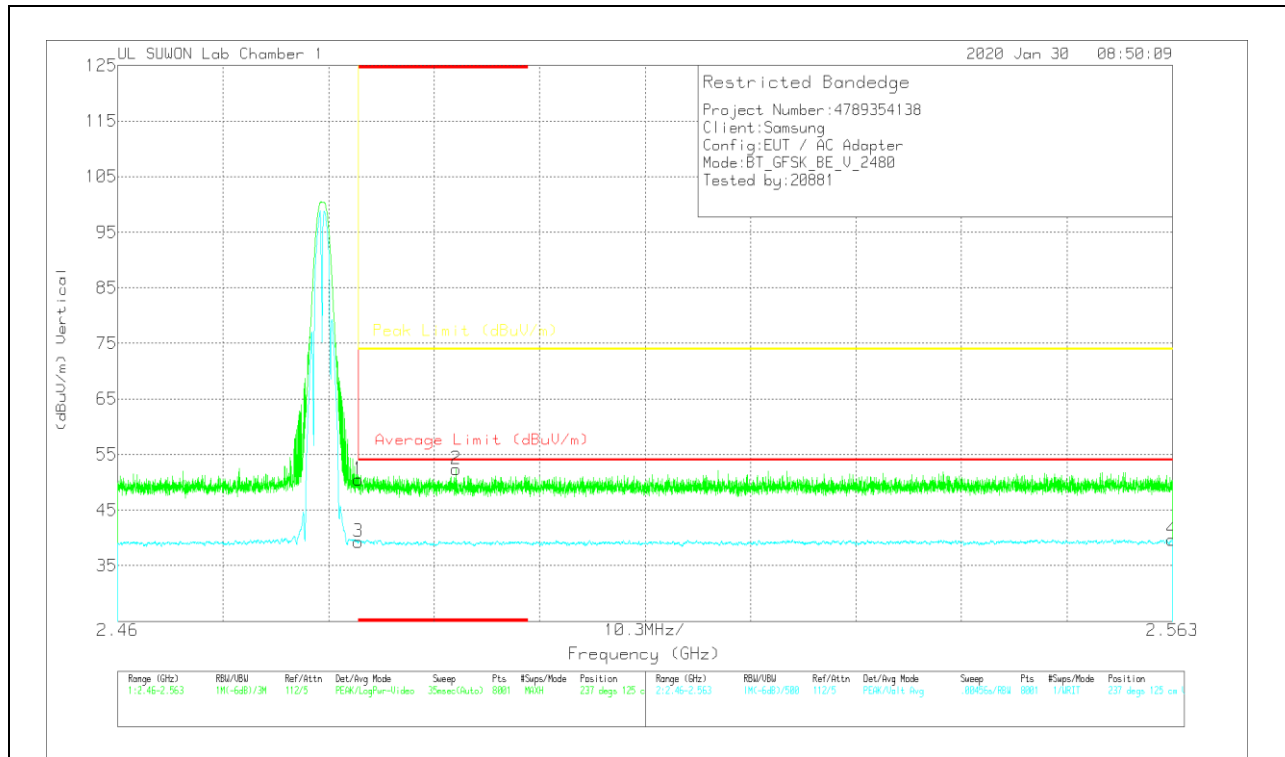


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43.8	Pk	31.9	-25.2	50.5	-	-	74	-23.5	237	125	V
2	* 2.49302	45.64	Pk	31.9	-25.2	52.34	-	-	74	-21.66	237	125	V
3	* 2.48351	32.56	VA1T	31.9	-25.2	39.26	54	-14.74	-	-	237	125	V
4	2.56296	32.8	VA1T	32	-25.1	39.7	54	-14.3	-	-	237	125	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

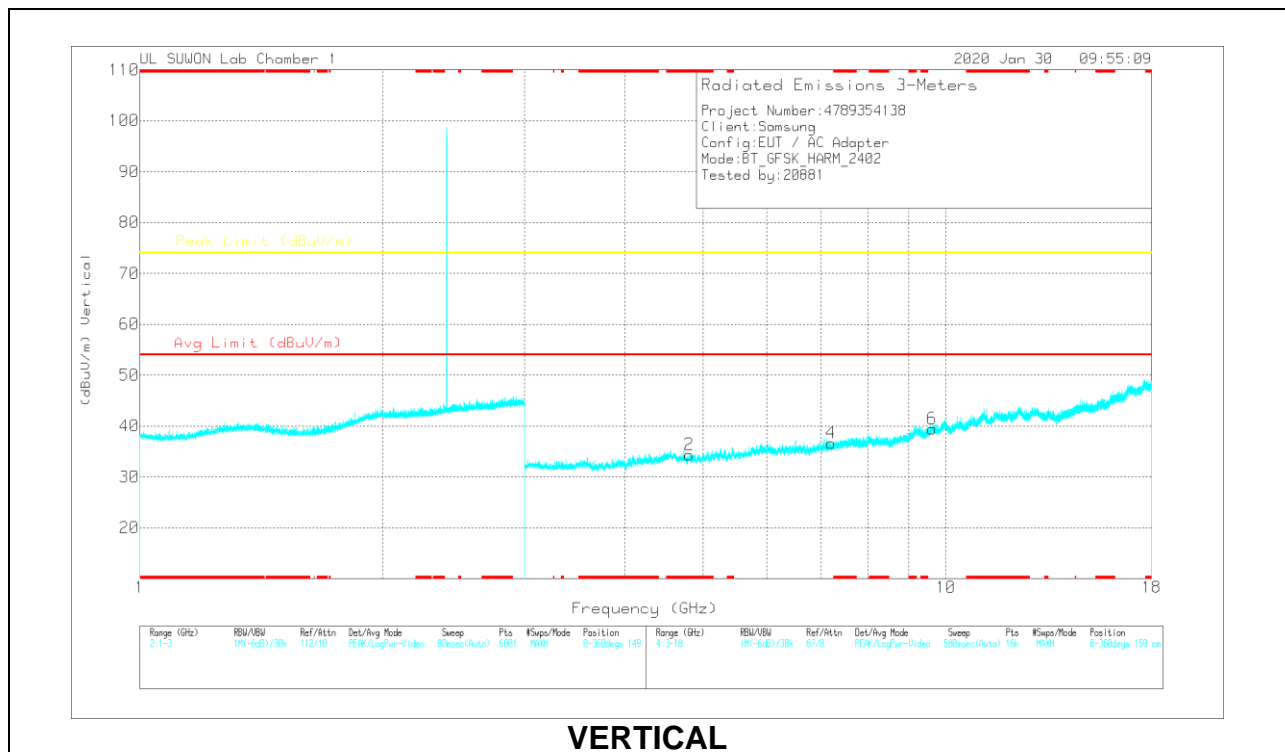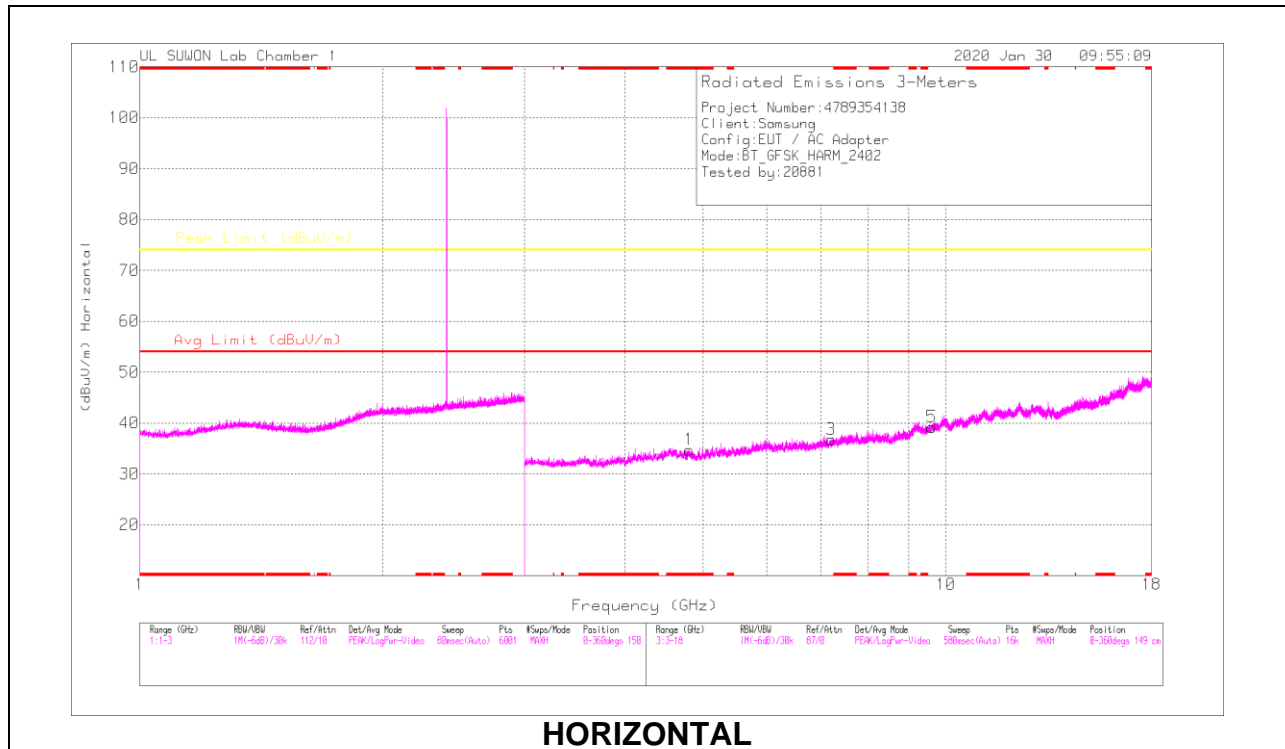

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.80218	39.29	PKFH	34.2	-31.6	41.89	-	-	74	-32.11	360	100	H
* 4.80162	39.11	PKFH	34.2	-31.6	41.71	-	-	74	-32.29	360	100	V
7.2033	35.86	PKFH	35.8	-27.8	43.86	-	-	74	-30.14	360	100	H
7.20316	35.71	PKFH	35.8	-27.8	43.71	-	-	74	-30.29	360	100	V
9.6062	32.86	PKFH	37	-23.3	46.56	-	-	74	-27.44	360	100	H
9.60972	32.53	PKFH	37	-23.2	46.33	-	-	74	-27.67	360	100	V


\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band



### MID CHANNEL RESULTS

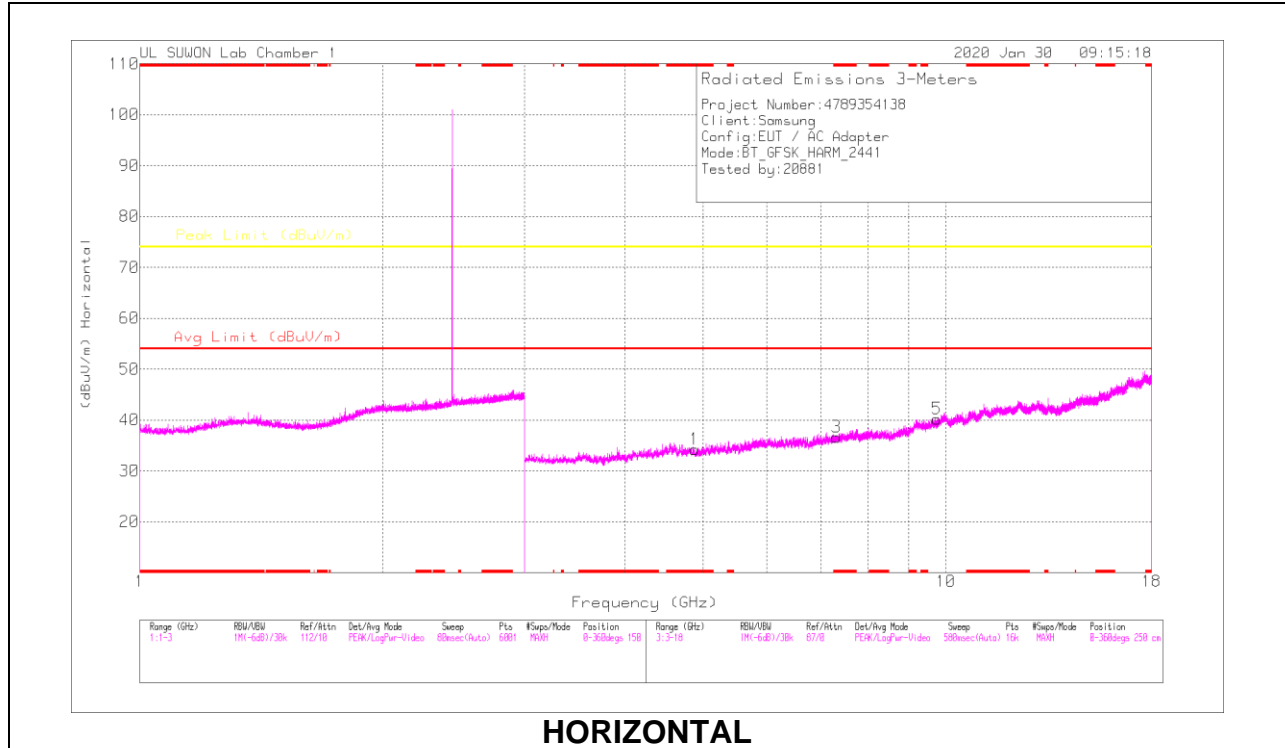

**HORIZONTAL**

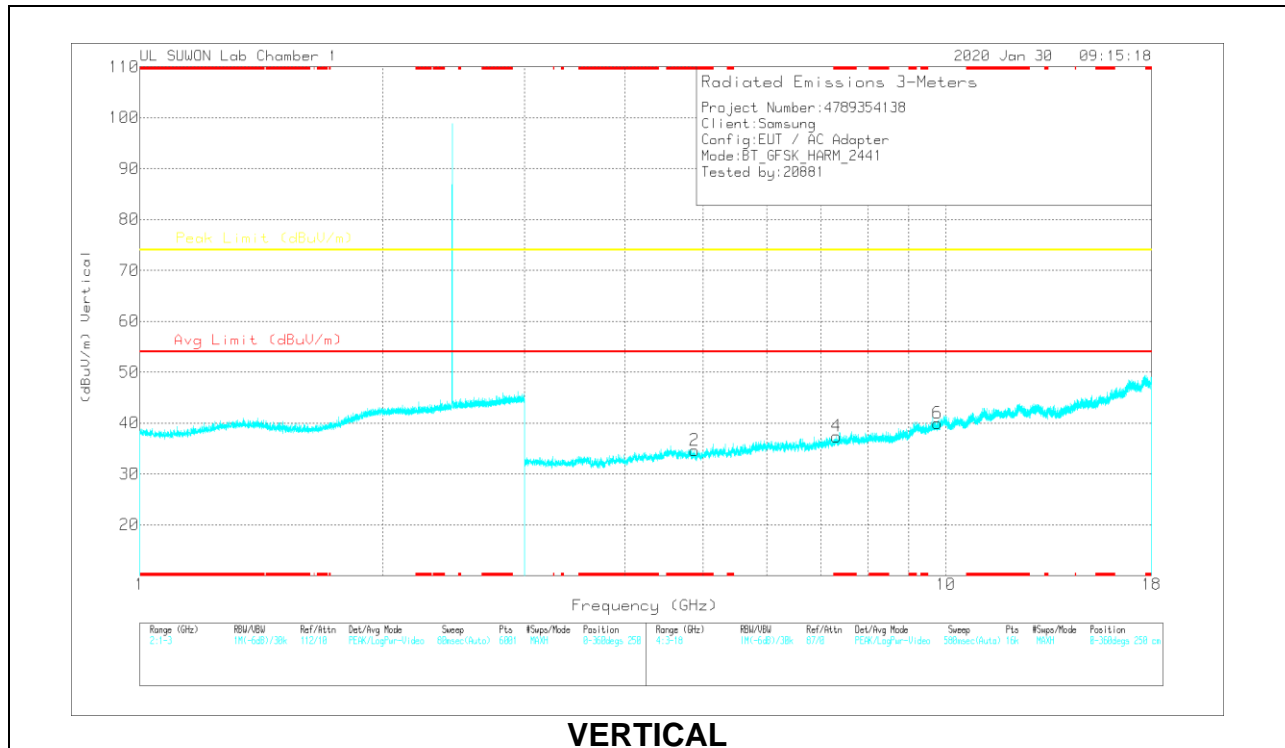

**VERTICAL**



Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.88281	38.46	PKFH	34.2	-31.6	41.06	-	-	74	-32.94	360	100	H
* 4.88211	39.49	PKFH	34.2	-31.6	42.09	-	-	74	-31.91	360	100	V
* 7.32244	35.01	PKFH	35.8	-27.2	43.61	-	-	74	-30.39	360	100	H
* 7.32095	35.86	PKFH	35.8	-27.2	44.46	-	-	74	-29.54	360	100	V
9.75491	33.09	PKFH	37.2	-23.8	46.49	-	-	74	-27.51	360	100	H
9.75502	32.74	PKFH	37.2	-23.8	46.14	-	-	74	-27.86	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

### HIGH CHANNEL RESULTS

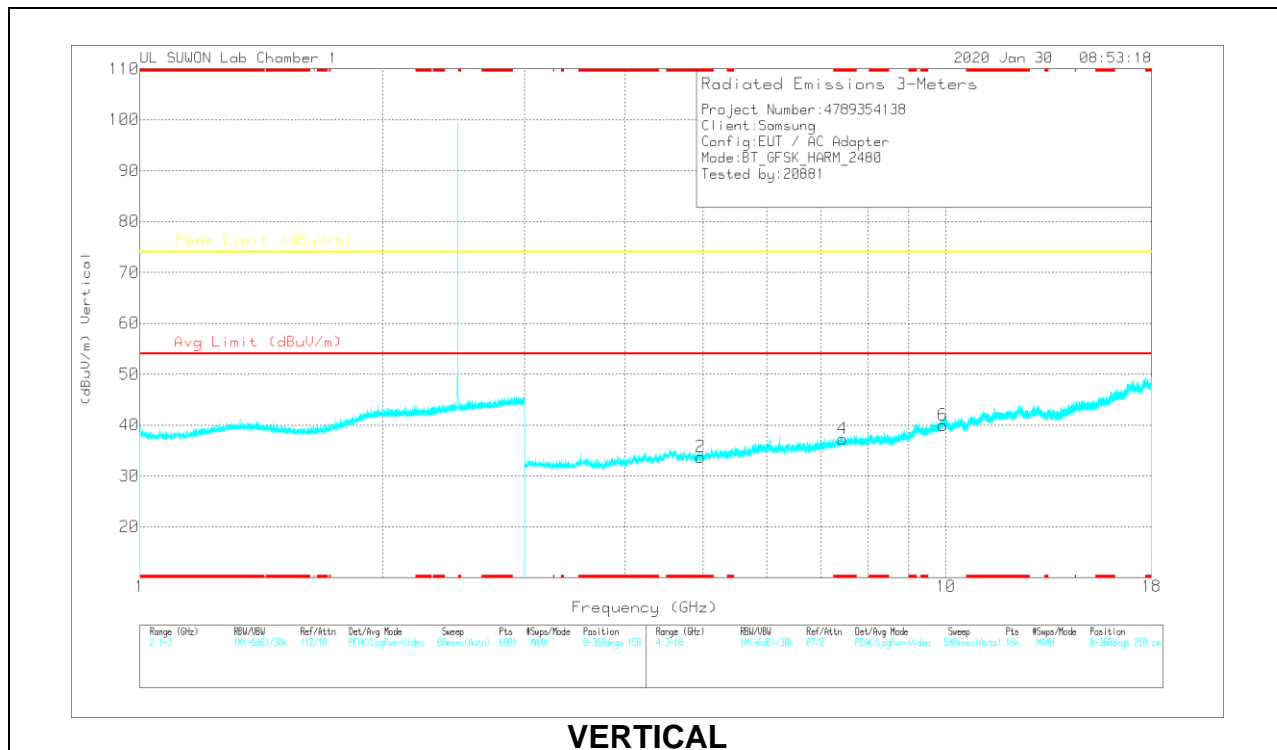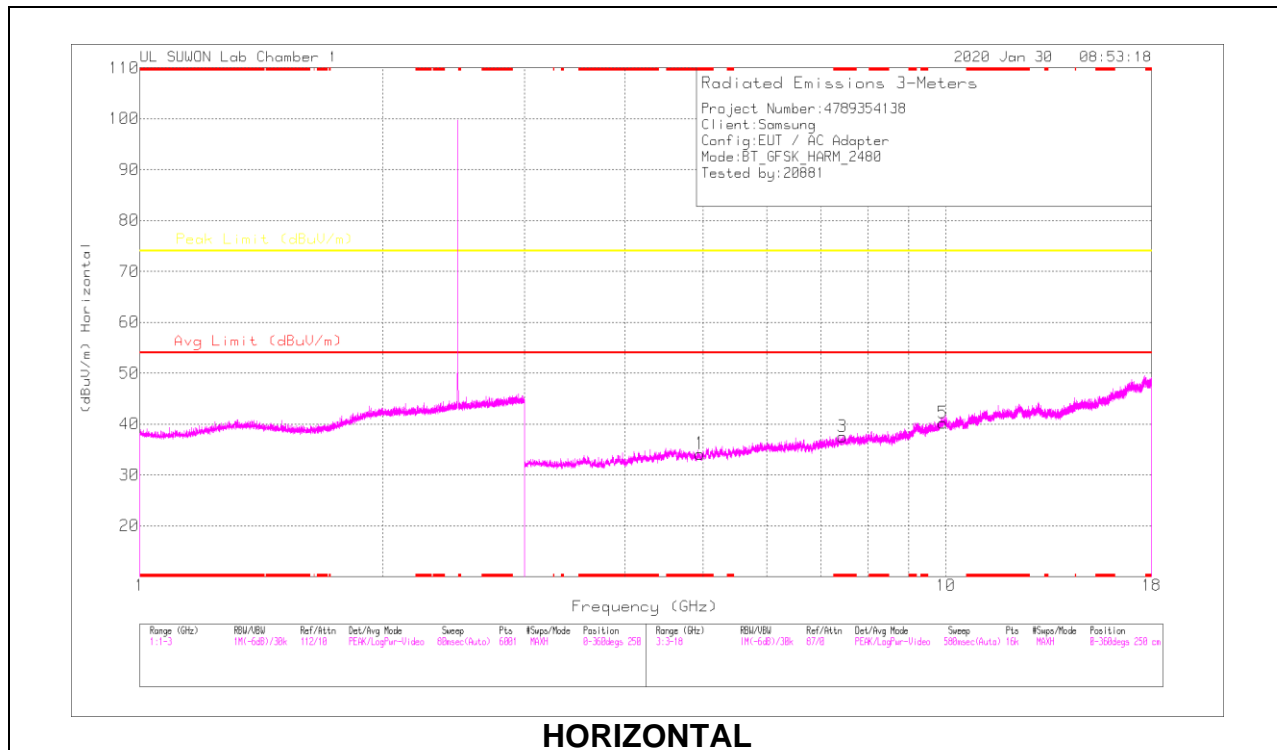

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**RADIATED EMISSIONS**


Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.95983	39.36	PKFH	34.2	-31.6	41.96	-	-	74	-32.04	360	100	H
* 4.96022	38.63	PKFH	34.2	-31.6	41.23	-	-	74	-32.77	360	100	V
* 7.44277	35.95	PKFH	35.8	-27.1	44.65	-	-	74	-29.35	360	100	H
* 7.4413	35.82	PKFH	35.8	-27.1	44.52	-	-	74	-29.48	360	100	V
9.92103	31.74	PKFH	37.5	-22	47.24	-	-	74	-26.76	360	100	H
9.92036	31.94	PKFH	37.5	-22.1	47.34	-	-	74	-26.66	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

## 11.1.2. BLUETOOTH ENHANCED DATA RATE 8PSK MODULATION

### BANDEDGE (LOW CHANNEL)

### HORIZONTAL RESULT

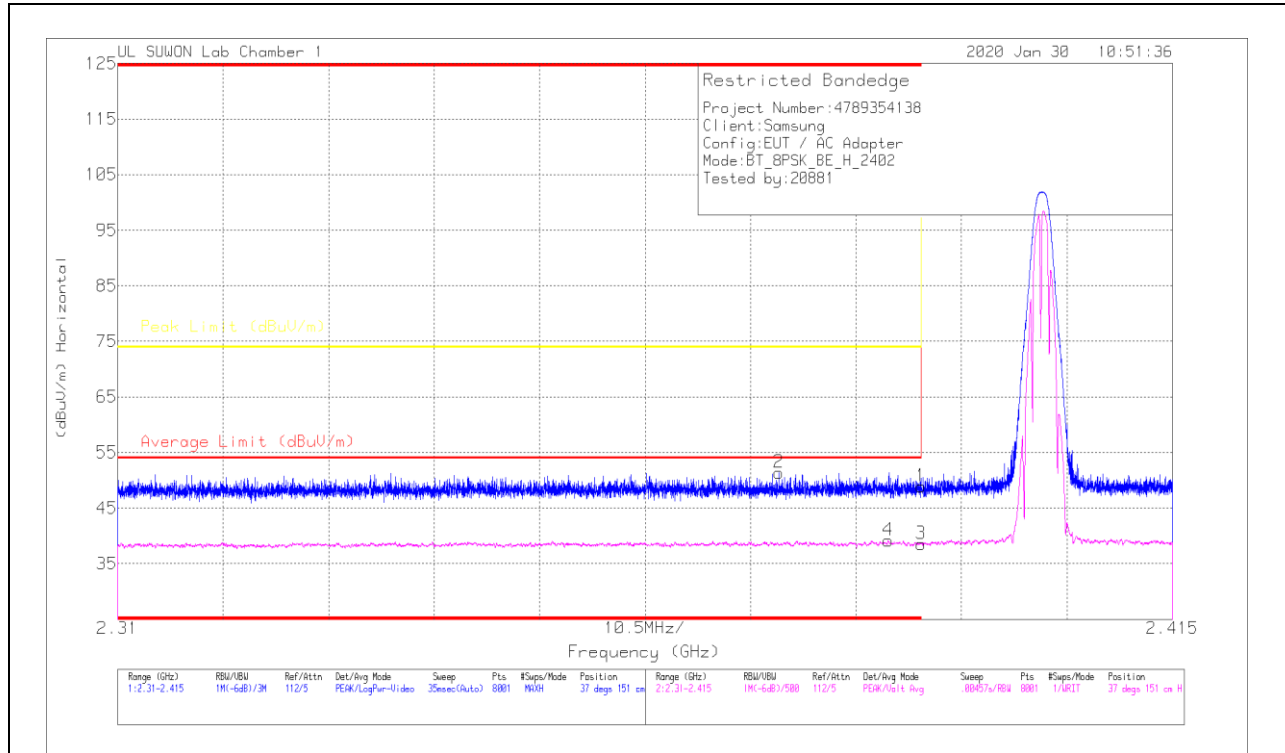


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.63	Pk	31.7	-25.5	48.83	-	-	74	-25.17	37	151	H
2	* 2.37582	45.42	Pk	31.6	-25.6	51.42	-	-	74	-22.58	37	151	H
3	* 2.39	32.33	VA1T	31.7	-25.5	38.53	54	-15.47	-	-	37	151	H
4	* 2.3867	32.96	VA1T	31.7	-25.5	39.16	54	-14.84	-	-	37	151	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

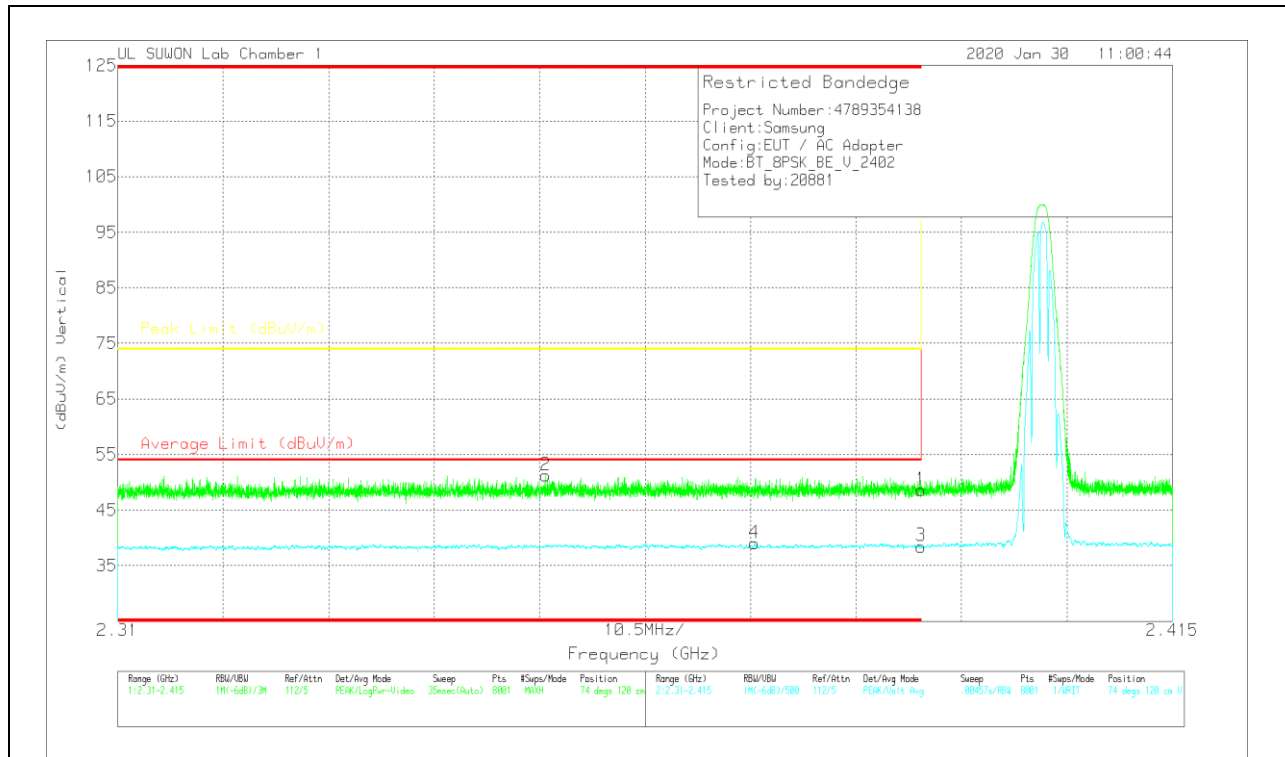


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	42.39	Pk	31.7	-25.5	48.59	-	-	74	-25.41	74	120	V
2	* 2.35259	45.22	Pk	31.6	-25.6	51.22	-	-	74	-22.78	74	120	V
3	* 2.39	32.28	VA1T	31.7	-25.5	38.48	54	-15.52	-	-	74	120	V
4	* 2.37341	33.06	VA1T	31.6	-25.6	39.06	54	-14.94	-	-	74	120	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration

**BANDEDGE (HIGH CHANNEL)**

**HORIZONTAL RESULT**

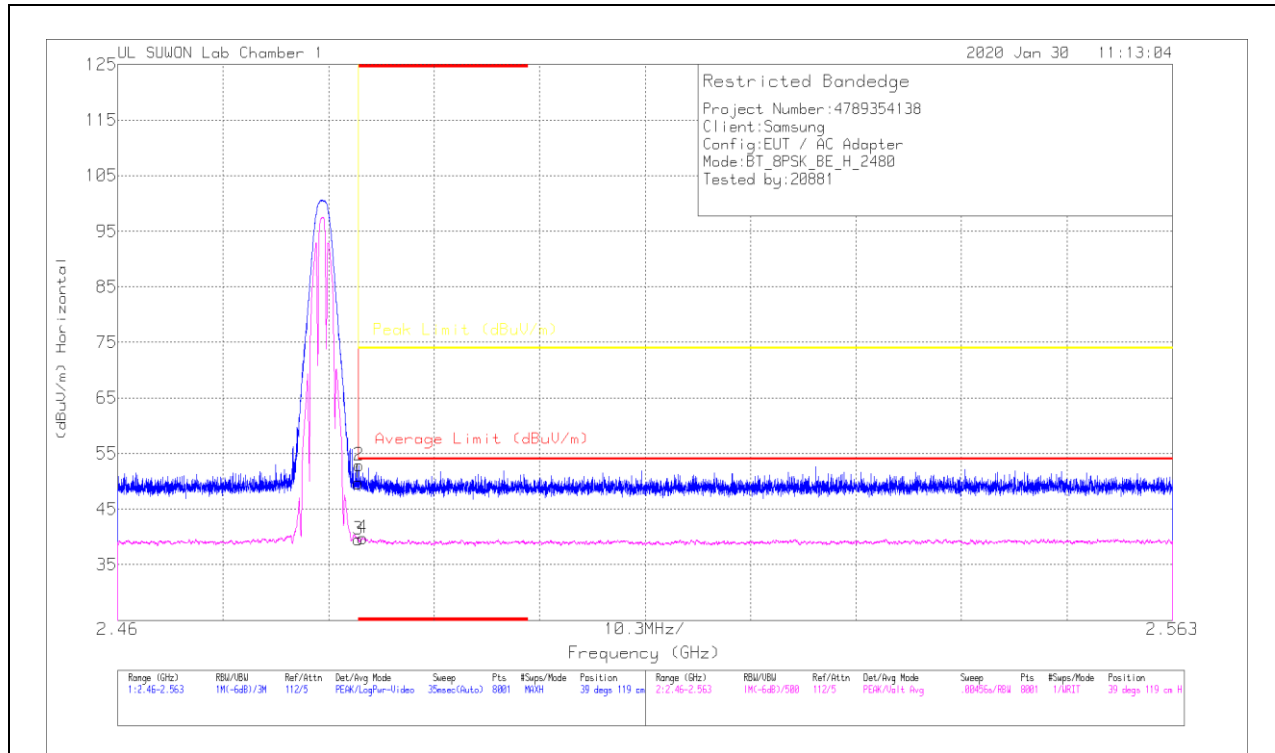


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	43	Pk	31.9	-25.2	49.7	-	-	74	-24.3	39	119	H
2	* 2.48354	46.17	Pk	31.9	-25.2	52.87	-	-	74	-21.13	39	119	H
3	* 2.48351	32.81	VA1T	31.9	-25.2	39.51	54	-14.49	-	-	39	119	H
4	* 2.48391	33.11	VA1T	31.9	-25.2	39.81	54	-14.19	-	-	39	119	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

VA1T - FHSS: Linear Voltage Average  $V_B=1/T_{on}$  where:  $T_{on}$  is transmit duration

### VERTICAL RESULT

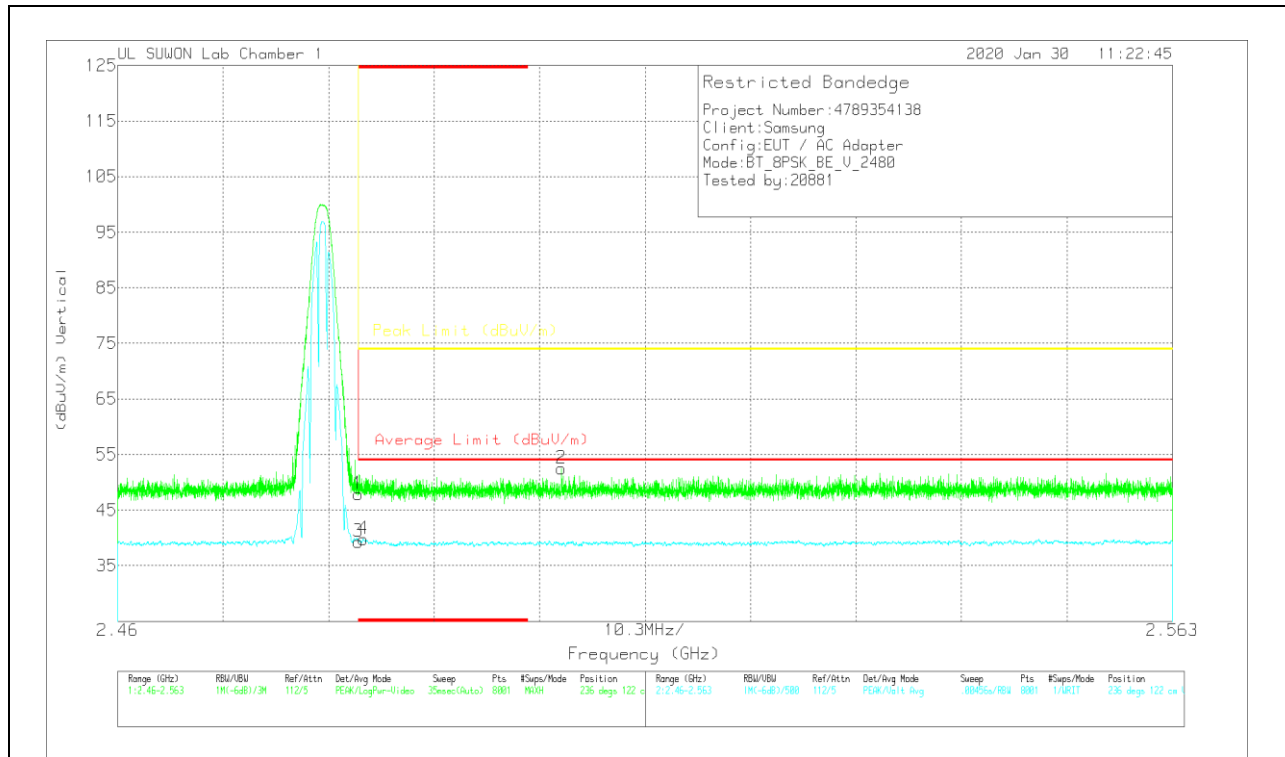



Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	10dB_ATT[dB]	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.48351	41.21	Pk	31.9	-25.2	47.91	-	-	74	-26.09	236	122	V
2	2.50331	45.78	Pk	32	-25.3	52.48	-	-	74	-21.52	236	122	V
3	* 2.48351	32.63	VA1T	31.9	-25.2	39.33	54	-14.67	-	-	236	122	V
4	* 2.48397	32.97	VA1T	31.9	-25.1	39.77	54	-14.23	-	-	236	122	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector  
 VA1T - FHSS: Linear Voltage Average VB=1/Ton where: Ton is transmit duration



**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL RESULTS**

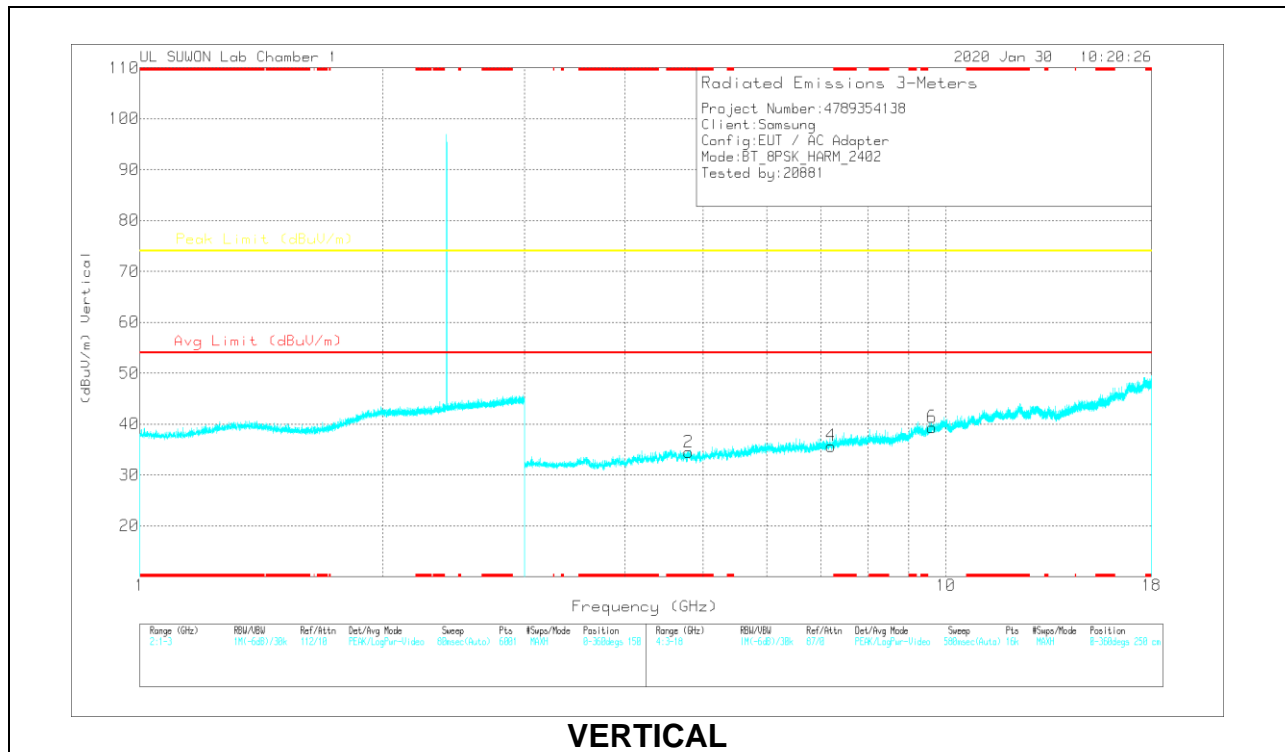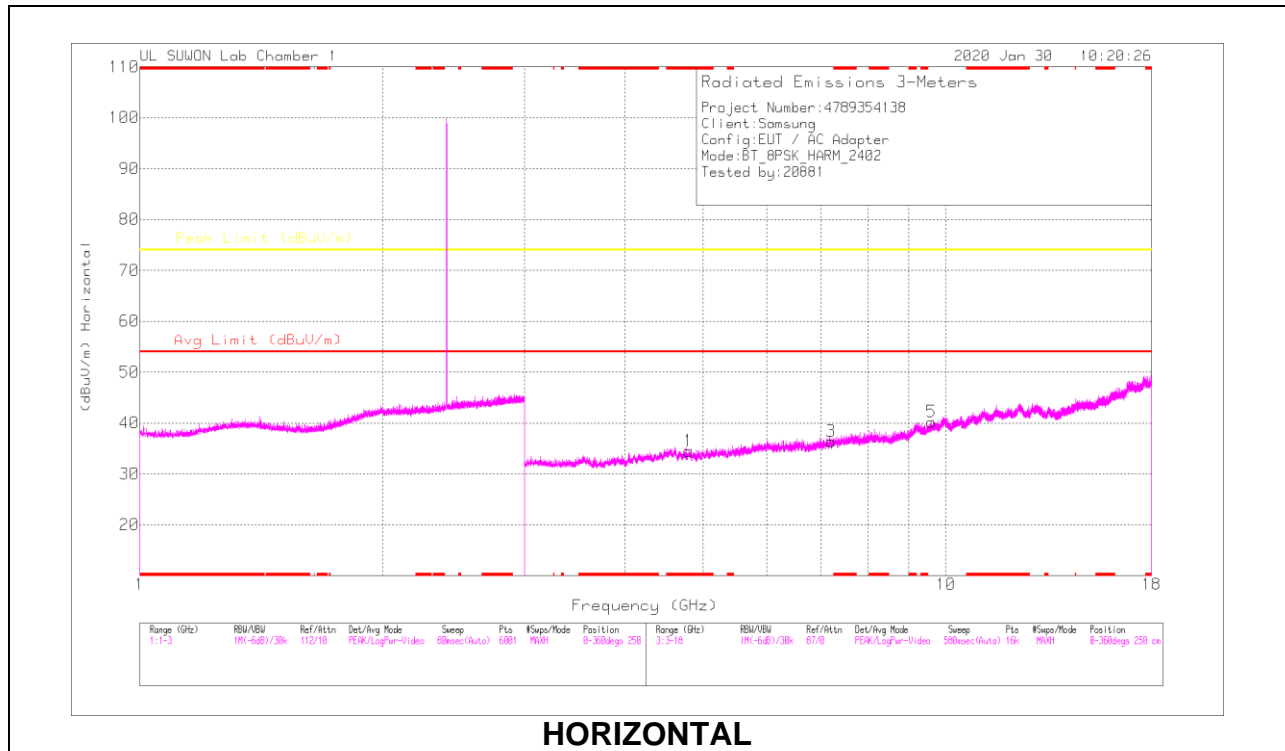

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

**RADIATED EMISSIONS**

Frequency (GHz)	Meter Reading (dBuV)	Det	3117_00168717	3GHz_HP[dB]	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.79853	38.95	PKFH	34.2	-31.6	41.55	-	-	74	-32.45	360	100	H
* 4.79919	39.59	PKFH	34.2	-31.6	42.19	-	-	74	-31.81	360	100	V
7.20579	35.74	PKFH	35.8	-27.8	43.74	-	-	74	-30.26	360	100	H
7.20717	35.6	PKFH	35.8	-27.8	43.6	-	-	74	-30.4	360	100	V
9.60155	33.29	PKFH	37	-23.2	47.09	-	-	74	-26.91	360	100	H
9.60455	32.85	PKFH	37	-23.2	46.65	-	-	74	-27.35	360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band