



CERTIFICATION TEST REPORT

Report Number. : 4789841431-E3V2

Applicant : SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 16677, KOREA

Model : SM-G780G/DSM, SM-G780G/DS, SM-G780G

FCC ID : A3LSMG780G

EUT Description : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,
WPT and NFC

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C

Date Of Issue:

March 18, 2021

Prepared by:

UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu

Suwon-si, Gyeonggi-do, 16675, Korea

TEL: (031) 337-9902

FAX: (031) 213-5433



ACCREDITED

Testing Laboratory

TL-637

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	03/12/21	Initial issue	Hyunsik Yun
V2	03/18/21	Updated to address TCB's question	Hyunsik Yun

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
1.1. INTRODUCTION OF TEST DATA REUSE	5
1.2. DIFFERENCE	5
1.3. SPOT CHECK VERIFICATION DATA	5
1.4. REFERENCE DETAIL	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION	8
4.3. MEASUREMENT UNCERTAINTY	8
4.4. DECISION RULE	8
5. EQUIPMENT UNDER TEST	9
5.1. EUT DESCRIPTION	9
5.2. MAXIMUM OUTPUT POWER	11
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.4. TESTED CHANNELS LIST	11
5.5. WORST-CASE CONFIGURATION AND MODE	12
5.6. DESCRIPTION OF TEST SETUP	13
6. MEASUREMENT METHOD	15
7. TEST AND MEASUREMENT EQUIPMENT	16

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

EUT DESCRIPTION: GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC

MODEL NUMBER: SM-G780G/DSM, SM-G780G/DS, SM-G780G

SERIAL NUMBER: R3CN7038XSF (CONDUCTED, Original);
R3CN7038YAF, R3CN7038Y7L (RADIATED, Original);
4b5859b4a4207ece, 4b5859b54c207ece (RADIATED, Spot-check);

DATE TESTED: JUL 23,2020 – AUG 12,2020(Original);
MAR 02, 2021 – MAR 12, 2021(Spot-check);

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Korea, Ltd. By:



Junwhan Lee
Suwon Lab Engineer
UL Korea, Ltd.

Tested By:



Hyunsik Yun
Suwon Lab Engineer
UL Korea, Ltd.

1.1. INTRODUCTION OF TEST DATA REUSE

This report referenced from the FCC ID: A3LSMG781B DTS(FCC CFR 47 Part 15C).
And the applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID.

1.2. DIFFERENCE

The FCC ID: A3LSMG780G shares the same enclosure and circuit board as FCC ID: A3LSMG781B. The WLAN antennas and surrounding circuitry and layout are identical between these two units for re-used bands.

After confirming through preliminary radiated emissions that the performance of the FCC ID: A3LSMG781B remains representative of FCC ID: A3LSMG780G. The test data of FCC ID: A3LSMG781B being submitted for this application to cover WLAN features.

1.3. SPOT CHECK VERIFICATION DATA

Band	Test Item	Mode	Frequency	Test Limit	Original model	Spot check model	Deviation	Remark
					SM-G781B/DS	SM-G780G/DS		
					FCC ID : A3LSMG781B	FCC ID : A3LSMG780G		
DTS WLAN (2.4 GHz)	Band Edge	11b ANT ALL	2462 MHz	54 dBuV/m	45.76 dBuV/m	44.74 dBuV/m	-1.02 dB	
	RSE	11b ANT ALL	4824 MHz	54 dBuV/m	43.68 dBuV/m	46.62 dBuV/m	2.94 dB	
	Band Edge	11g ANT ALL	2472 MHz	54 dBuV/m	51.36 dBuV/m	45.09 dBuV/m	-6.27 dB	
	RSE	11g ANT ALL	4824 MHz	54 dBuV/m	34.25 dBuV/m	36.01 dBuV/m	1.76 dB	
	Band Edge	11n HT20 ANT ALL	2472 MHz	54 dBuV/m	51.27 dBuV/m	48.62 dBuV/m	-2.65 dB	
	RSE	11n HT20 ANT ALL	4824 MHz	54 dBuV/m	33.73 dBuV/m	35.25 dBuV/m	1.52 dB	
	Band Edge	11ax HE20(SU) ANT ALL	2472 MHz	54 dBuV/m	47.83 dBuV/m	47.79 dBuV/m	-0.04 dB	
	RSE	11ax HE20(RU4) ANT ALL	9848 MHz	74 dBuV/m	48.63 dBuV/m	48.88 dBuV/m	0.25 dB	Noise floor level

Comparison of two models, upper deviation is within 3dB range and all test results are under FCC technical limits.

1.4. REFERENCE DETAIL

Reference application that contains the re-used reference data.

Equipment Class	Reference FCC ID	Type Grant/Permissive Change	Reference Application	Folder Test/RF Exposure	Report Title / Section
PCE	A3LSMG781B	Grant	4789555428-E2	Test	FCC Report WWAN/ All sections
DTS	A3LSMG781B	Grant	4789555428-E3	Test	Report DTS[b,g,n,ax] WLAN/ All sections
			4789555428-E4	Test	FCC Report BLE/ All sections
DSS	A3LSMG781B	Grant	4789555428-E5	Test	FCC Report BT/ All sections
NII	A3LSMG781B	Grant	4789555428-E6	Test	FCC Report UNII[a,n,ac,ax] WLAN/ All sections (Include DFS)

2. TEST METHODOLOGY

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. KDB 558074 D01 DTS Meas Guidance v05r02.
4. KDB 662911 D01 Multiple Transmitter Output v02r01
5. ANSI C63.10-2013.
6. KDB 484596 D01 Referencing Test Data v01

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 28.9 \text{ dBuV/m} &= 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.01 dB
Radiated Disturbance, 30 MHz to 1 GHz	4.26 dB
Radiated Disturbance, 1 GHz to 18 GHz	5.90 dB
Radiated Disturbance, 18 GHz to 40 GHz	5.49 dB

Uncertainty figures are valid to a confidence level of 95%.

4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

5. EQUIPMENT UNDER TEST

5.1. EUT DESCRIPTION

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC. This test report addresses the DTS (WLAN) operational mode.

This report covers the Samsung models SM-G780G/DSM, SM-G780G/DS and SM-G780G. These models are identical in hardware except SM-G780G/DSM is supported MST and SM-G780G/DS has dual SIM tray and SM-G780G has single SIM tray. All serie model was same hardware thus, SM-G780G/DS(Dual SIM tray) was set for final test.

WiFi operating mode

Frequency rage	Mode	ANT 1	ANT 2
2.4GHz (2412 MHz ~ 2472 MHz)	802.11b SISO	TX/RX	TX/RX
	802.11b MIMO	TX/RX	TX/RX
	802.11g SISO	TX/RX	TX/RX
	802.11g MIMO	TX/RX	TX/RX
	802.11n(HT20) SISO	TX/RX	TX/RX
	802.11n(HT20) MIMO	TX/RX	TX/RX
	802.11ax(HE20) SISO	TX/RX	TX/RX
	802.11ax(HE20) MIMO	TX/RX	TX/RX

Simultaneous TX Condition


Simultaneous Tx Condition - RSDB

Mode	# of TX	5GHz WLAN		2.4GHz WLAN		Test Case
		ANT1	ANT2	ANT1	ANT2	
2.4GHz + 5GHz RSDB MIMO	4	O	O	O	O	O

Simultaneous Tx Condition - RSDB + Bluetooth

Mode	# of TX	5GHz WLAN		2.4GHz Bluetooth	2.4GHz WLAN	Test Case
		ANT1	ANT2	ANT1	ANT2	
5GHz MIMO RSDB & Bluetooth	3	O	O	O	-	-
2.4GHz + 5GHz MIMO RSDB & Bluetooth	4	O	O	O	O	O

802.11ax RU allocations

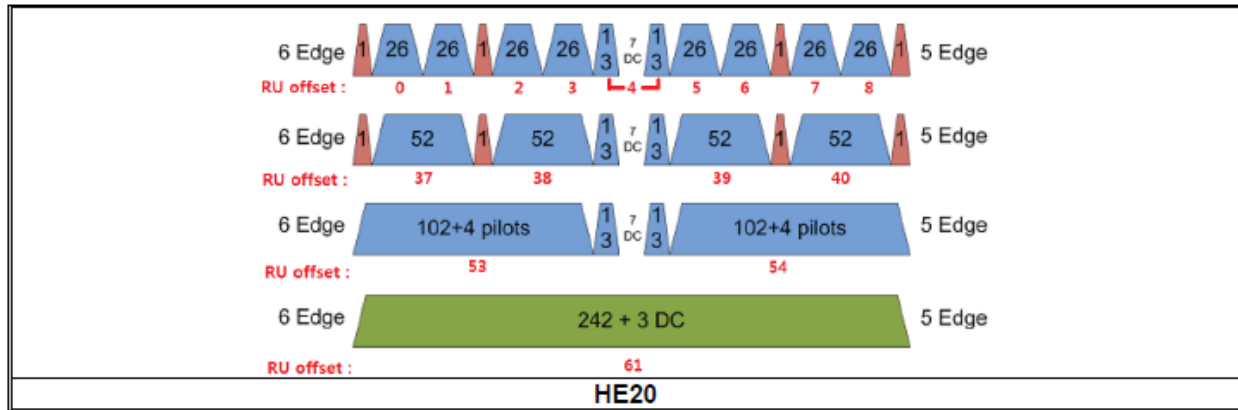

Test RU offset for tones

Mode	Tones number in RU	RU offset
HE20	26T	0
		4
		8
	52T	37
		38
		40
	106T	53
		54
	242T / SU ^{Note 1}	61 / -

Note. Full RU(Resource Unit) 242T mode and SU(Single Unit) mode have no difference in physical waveform. This report has been reported the SU mode with highest output power in SISO and the SU mode with highest output power in MIMO.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum total conducted average output power as follows:

Frequency Range [MHz]	Mode	Output Power [dBm]		Output Power [mW]	
		ANT1	ANT2	ANT1	ANT2
2412 - 2472	802.11b SISO	18.68	18.13	73.79	65.01
	802.11b MIMO	20.43		110.41	
	802.11g SISO	17.71	16.62	59.02	45.92
	802.11g MIMO	20.06		101.39	
	802.11n(HT20) SISO	17.45	16.31	55.59	42.76
	802.11n(HT20) MIMO	19.84		96.38	
	802.11ax(HE20) SISO	17.47	16.89	55.85	48.87
	802.11ax(HE20) MIMO	19.97		99.31	

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The internal antenna was Permanently attached.

Therefore this E.U.T Complies with the requirement of §15.203.

The radio utilizes an internal antennas, with Antenna 1's maximum gain of -4.12 dBi and Antenna 2's maximum gain of -8.30 dBi
"WIFI0" and "WIFI1" as indicated in antenna specification are written as ANT1 and ANT2 in this report.

5.4. TESTED CHANNELS LIST

Ch.	Frequency [MHz]	11b [MIMO]	11g [MIMO]	11n(HT20) [MIMO]	11ax(HE20) [MIMO]
1	2 412	O	O	O	O
6	2 437	O	O	O	O
11	2 462	O	O	O	O
12	2 467	O	O	O	O
13	2 472	O	O	O	O

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission below 1GHz and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit low/mid/High Channels.

Worst case condition

ANT1	ANT2	ANT ALL
Axis	Axis	Axis
Y	X	X

Based on the baseline scan, the worst-case data rates were:

802.11b mode: 1 Mbps 2TX

802.11g mode: 6 Mbps 2TX

802.11n HT20 mode: MCS0 2TX

802.11ax HE20 mode: MCS0 2TX

Worst-case selection criteria for 802.11ax test items :

For the 6dB Bandwidth, it was tested at the RU allocation with lowest tones number for each bandwidth.

Depending on spot-check results for 802.11b / g / n HT20, MIMO mode is worst case than SISO(Antenna1 and Antenna 2). So radiation test for 802.11b / g / n HT20 were evaluated at MIMO mode.

Note : All radiated and power line conducted tests were performed attached with travel adapter for the worst case condition mode.

Test case configuration for 802.11ax HE20(RU) modes :

SISO ANT1 Worst RU offset[dBm]						SISO ANT2 Worst RU offset[dBm]					MIMO Worst RU offset[dBm]				
Mode	Ch.	Freq.	Tone	RU offset	Test Case	Ch.	Freq.	Tone	RU offset	Test Case	Ch.	Freq.	Tone	RU offset	Test Case
802.11ax RU mode	1	2412	26 T	0	-	1	2412	26 T	0	-	1	2412	26 T	0	-
				4	-				4	-				4	O
				8	-				8	-				8	-
	6	2437		0	-	6	2437		0	-	6	2437		0	-
				4	-				4	-				4	-
				8	-				8	-				8	O
	11	2462		0	-	11	2462		0	-	11	2462		0	-
				4	-				4	-				4	O
				8	-				8	-				8	-

Note1. The target power of 12 and 13 channel is lower than 11 channel in 802.11ax HE20(RU) mode, So radiated emissions test of 12 and 13 channel was excluded.

Note2. In 802.11ax HE20(RU) mode, the test case according to RU offset was selected from the offset with worst average power.

Note3. In 11ax RU mode, MIMO target power is higher than SISO(+3 dB), therefore radiated emissions test was performed in worst case MIMO mode.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37M15D6V31SE3	N/A
Data Cable	SAMSUNG	N/A	N/A	N/A


I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	C Type	Shielded	1.0 m	N/A


TEST SETUP

The EUT is a stand-alone unit during the tests.
Test software in hidden menu exercised the EUT to enable DTS mode.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

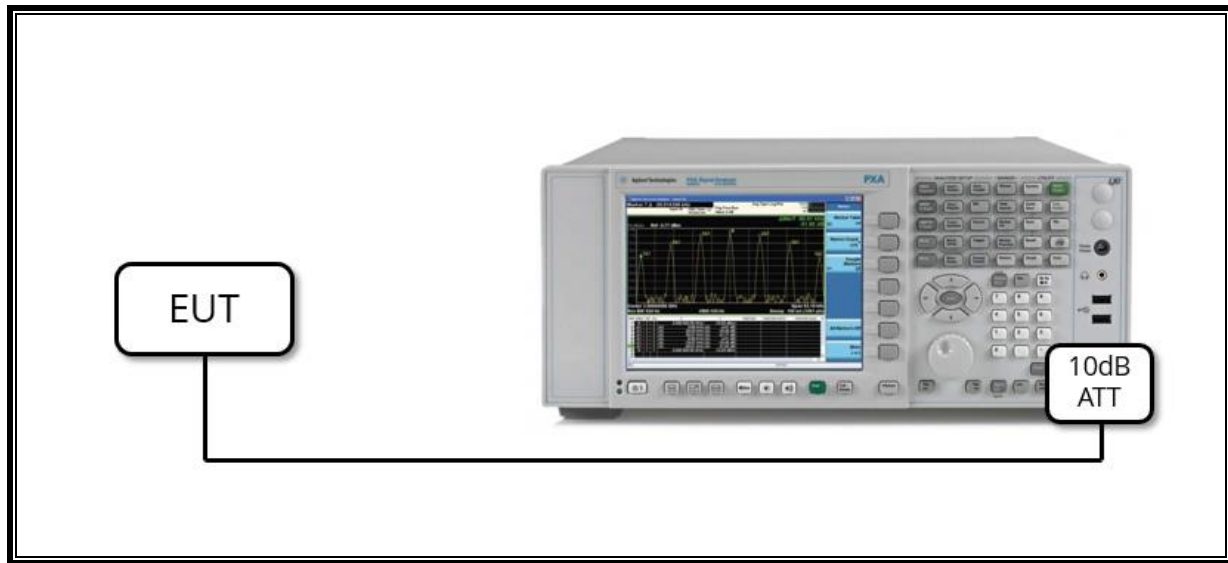

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

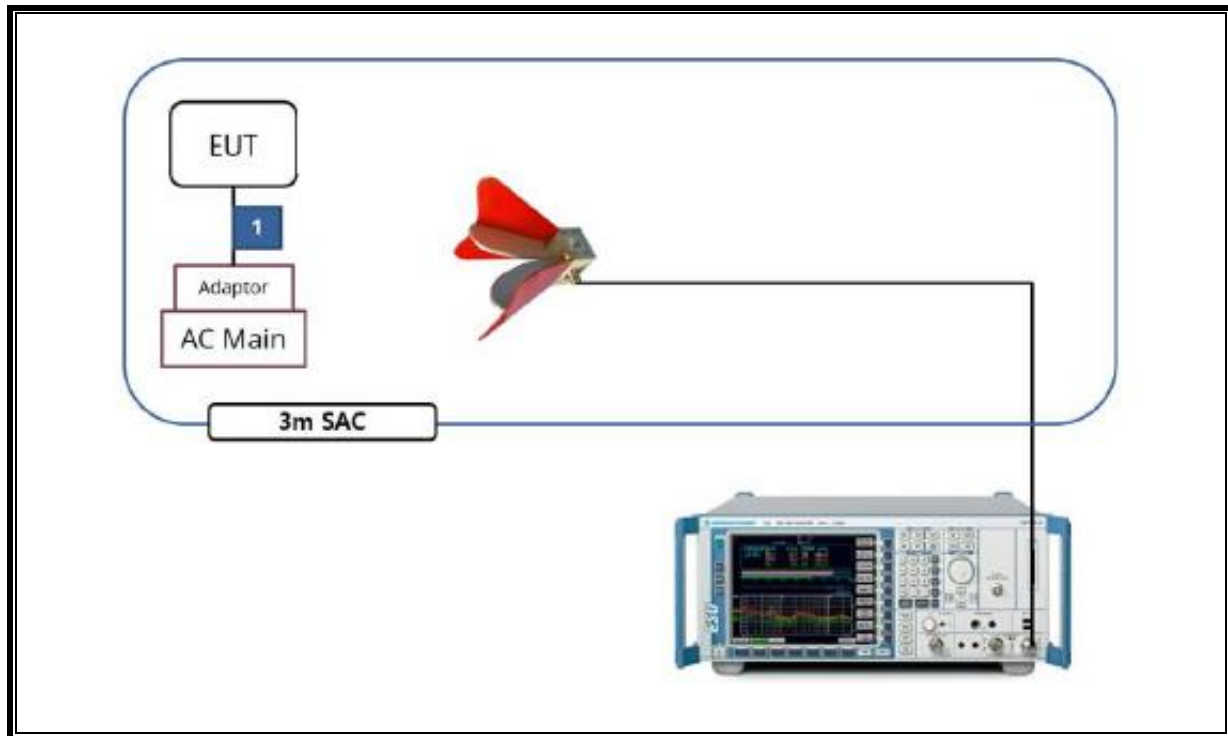

6. MEASUREMENT METHOD

6 dB BW : KDB 558074 D01 v05r02, Section 8.2

OUTPUT POWER : KDB 558074 D01 v05r02, Section 8.3.2.3.

POWER SPECTRAL DENSITY : KDB 558074 D01 v05r02, Section 8.4.

Out-of-band EMISSIONS (Conducted) : KDB 558074 D01 v05r02, Section 8.5.

Out-of-band EMISSIONS IN NON-RESTRICTED BANDS: KDB 558074 D01 v05r02, Section 8.5.

Out-of-band EMISSIONS IN RESTRICTED BANDS KDB 558074 D01 v05r02, Section 8.6.

AC Power Line Conducted Emission : ANSI C63.10-2013, Section 6.2.

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-19-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-13-22
Antenna, Horn, 18 GHz	ETS	3115	00167211	07-27-22
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-15-22
Antenna, Horn, 18 GHz	ETS	3117	00168724	07-27-22
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-15-22
Antenna, Horn, 40 GHz	ETS	3116C	00166155	08-04-22
Antenna, Horn, 40 GHz	ETS	3116C	00168645	10-02-21
Preamplifier	ETS	3116C-PA	00168841	08-06-21
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-03-21
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-04-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-05-21
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-05-21
Spectrum Analyzer, 43.5 GHz	R&S	FSW43	104089	08-06-21
Average Power Sensor	Agilent / HP	U2000	MY54270007	08-05-21
Attenuator	PASTERNAK	PE7087-10	A001	08-03-21
Attenuator	PASTERNAK	PE7087-10	A008	08-03-21
Attenuator	PASTERNAK	PE7004-10	2	08-04-21
Attenuator	PASTERNAK	PE7087-10	A009	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-03-21
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-03-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-03-21
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	020	08-04-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-03-21
High Pass Filter 3GHz	Micro-Tronics	HPM17543	020	08-04-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	009	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	016	08-03-21
High Pass Filter 6GHz	Micro-Tronics	HPS17542	021	08-04-21
LISN	R&S	ENV-216	101837	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	
AC Line Conducted software	UL	UL EMC	Ver 9.5	

END OF TEST REPORT