



# **CERTIFICATION TEST REPORT**

**Report Number.** : 4789555428-E7V1

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-G781B/DS, SM-G781B

**FCC ID** : A3LSMG781B

**EUT Description** : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
WPT and NFC

**Test Standard(s)** : FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**  
August 14, 2020

**Prepared by:**  
UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433



REPORT REVISION HISTORY

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/14/20	Initial issue	Jihyeon Park

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY .....</i>	6
4.4. <i>DECISION RULE .....</i>	6
<b>5. EQUIPMENT UNDER TEST.....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM E-FIELD STRENGTH.....</i>	7
5.3. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	7
5.4. <i>DESCRIPTION OF TEST SETUP .....</i>	8
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. 20dB BANDWIDTH .....</b>	<b>10</b>
<b>8. RADIATED EMISSION TEST RESULTS.....</b>	<b>11</b>
8.1. <i>LIMITS AND PROCEDURE .....</i>	11
8.1.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) .....</i>	13
8.1.2. <i>SPURIOUS EMISSION 0.009 TO 30 MHz.....</i>	15
8.1.3. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz .....</i>	17
8.1.4. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode] .....</i>	19
8.1.5. <i>SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode].....</i>	21
8.1.6. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode] .....</i>	23
<b>9. AC MAINS LINE CONDUCTED EMISSIONS.....</b>	<b>25</b>
<b>10. FREQUENCY STABILITY .....</b>	<b>28</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC  
**MODEL NUMBER:** SM-G781B/DS, SM-G781B  
**SERIAL NUMBER:** R3CN7038ZYD (Radiated)  
**DATE TESTED:** JUL 20, 2020 – JUL 31, 2020;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Complies

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Jihyeon Park  
Suwon Lab Technician  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.
3. ANSI C63.10-2013.
4. 414788 D01 Radiated Test Site v01r01

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input type="checkbox"/>	Chamber 1
<input checked="" type="checkbox"/>	Chamber 2
<input type="checkbox"/>	Chamber 3

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.35 dB
Radiated Disturbance, 9 kHz to 30 MHz	1.72 dB
Radiated Disturbance, 30 MHz to 1 GHz	3.49 dB

Uncertainty figures are valid to a confidence level of 95%.

### 4.4. DECISION RULE

Decision rule for statement(s) of conformity is based on Procedure 1, Clause 4.4.2 in IEC Guide 115:2007.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC. This test report addresses the DXX (NFC) operational mode.

This report covers the Samsung models SM-G781B/DS and SM-G781B. These models are identical in hardware except SM-G781B has single SIM tray. With some pre-scan, model SM-G781B/DS was set for final test.

### 5.2. MAXIMUM E-FIELD STRENGTH

The testing was performed at 3 meter. The transmitter maximum E-field at 30m distance is 19.70 dBuV/m which convert from 3 meter data.

### 5.3. WORST-CASE CONFIGURATION AND MODE

The NFC function was tested at its' fundamental and only operational frequency of 13.56 MHz.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z. It was determined that the Y orientation was the worst-case orientation; therefore all final radiated testing was performed with the EUT in the Y orientation while generating continuous emissions.

The fundamental level of the EUT was investigated each type and bitrate. All test was performed worst case condition(type A and bit rate 106 kbps).

Radiated(fundamental level and spurious emissions) tests were performed both without reading a passive tag condition[test mode] and with reading a passive tag condition.

## 5.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Charger	SAMSUNG	EP-TA200	R37MCQS5HH1DK3	N/A
Data Cable	SAMSUNG	EP-DR140ABE	N/A	N/A


### I/O CABLE

I/O Cable List						
Cable No.	Port	# of identical ports	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC Power	1	C Type	Shielded	1.1m	N/A

The EUT is a stand-alone device configured and tested in a worst-case setup.

Note: Worst case is using worst case orientation with AC charger attached to the EUT with NFC signal continuously transmitting.

### SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

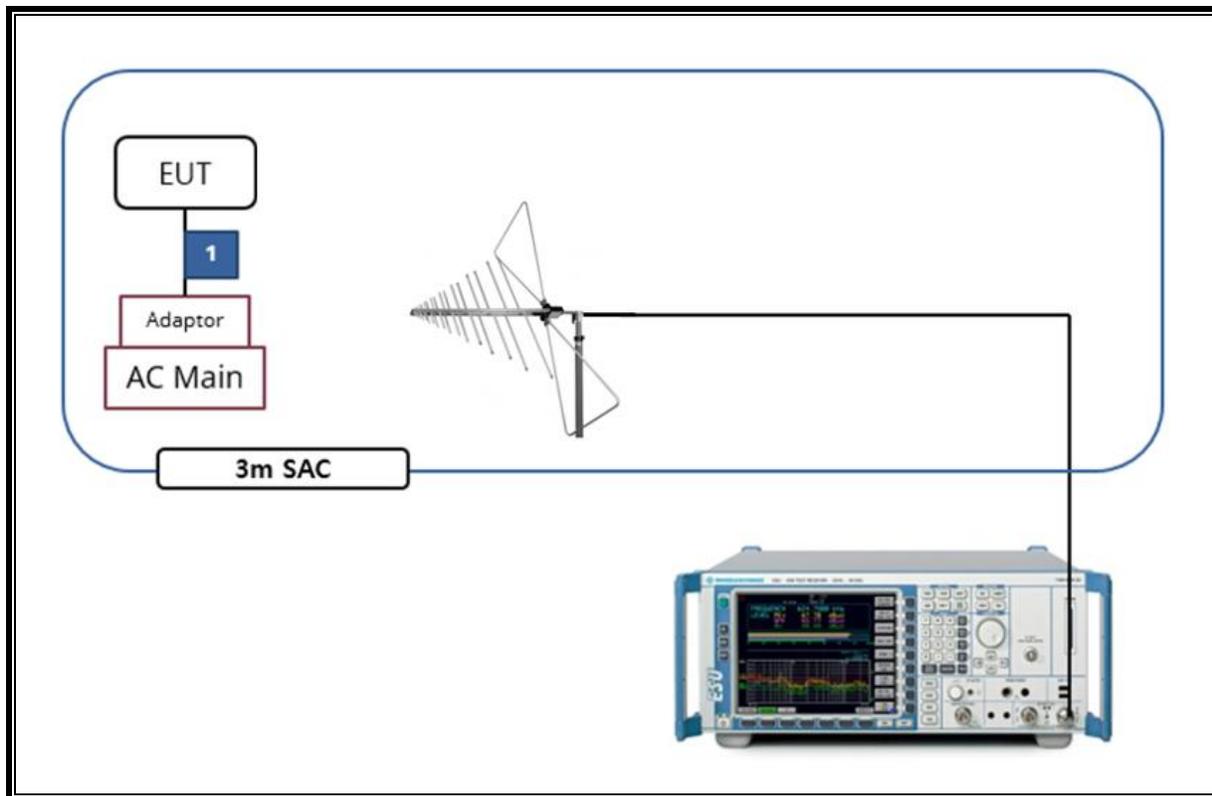

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	S/N	Next Cal. Date	
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845(Note)	08-04-20	08-13-22
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749(Note)	08-04-20	08-13-22
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-05-20	08-03-21
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-05-20	08-03-21
Spectrum Analyzer, 7 GHz	Agilent / HP	N9010A	MY54200580	08-07-20	08-05-21
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-05-20	08-03-21
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-06-20	08-05-21
Temperature Chamber	ESPEC	SH-642	93001109	08-05-20	08-04-21
LISN	R&S	ENV216	101837	08-09-20	08-06-21
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-02-21	
UL Software					
Description	Manufacturer	Model	Version		
Radiated software	UL	UL EMC	Ver 9.5		
AC Line Conducted software	UL	UL EMC	Ver 9.5		

Note. The above antenna was not used for testing from August 4th to August 13th.

## 7. 20dB BANDWIDTH

### LIMITS

§15.215

(c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated

§15.225

Operation within the band 13.110 – 14.010MHz

### TEST PROCEDURE

The spectrum analyzer connected receive antenna and the EUT placed on near the receive antenna. The RBW is set to 10KHz. The VBW is set to 3 times the RBW. The sweep time is coupled.

### RESULTS

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	435.10

### 20dB Bandwidth Plot



## 8. RADIATED EMISSION TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMIT

§15.225

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

Limit (dBuV/m) = 20 log limit (uV/m)

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

### **TEST PROCEDURE**


ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

### **RESULTS**

No non-compliance noted:

### 8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz)

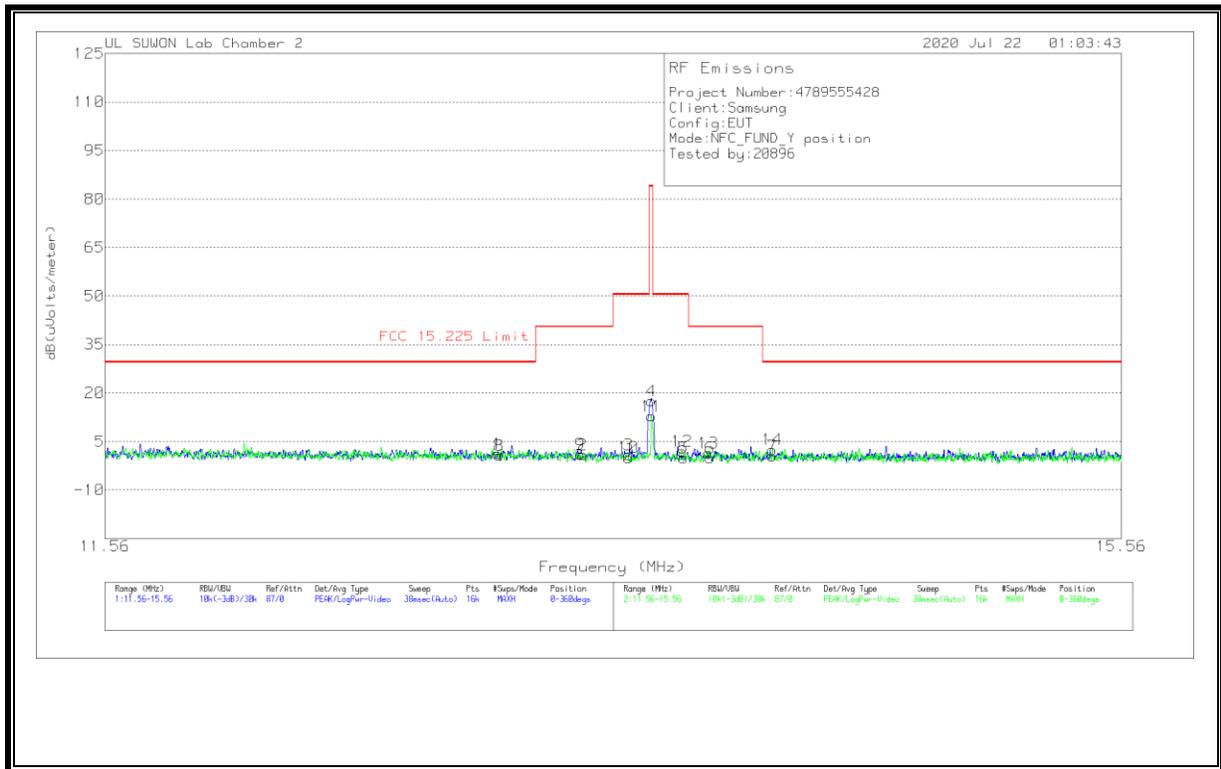

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	12.96575	20.77	Pk	20	-40	.5	1.27	29.54	-28.27	0-360
2	13.2925	20.49	Pk	20	-40	.5	.99	40.51	-39.52	0-360
3	13.472	20.34	Pk	20	-40	.5	.84	50.5	-49.66	0-360
**4	13.5635	37.04	Pk	20	-40	.5	17.54	84	-66.46	0-360
5	13.6905	19.41	Pk	20	-40	.6	.01	50.5	-50.49	0-360
6	13.79775	19.38	Pk	20	-40	.6	-.02	40.51	-40.53	0-360
7	14.051	19.95	Pk	20	-40	.6	.55	29.54	-28.99	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	12.9725	20.28	Pk	20	-40	.5	.78	29.54	-28.76	0-360
9	13.283	20.53	Pk	20	-40	.5	1.03	40.51	-39.48	0-360
10	13.472	19.58	Pk	20	-40	.5	.08	50.5	-50.42	0-360
**11	13.56225	32.31	Pk	20	-40	.5	12.81	84	-71.19	0-360
12	13.68425	21.4	Pk	20	-40	.6	2	50.5	-48.5	0-360
13	13.79025	20.96	Pk	20	-40	.6	1.56	40.51	-38.95	0-360
14	14.05075	21.91	Pk	20	-40	.6	2.51	29.54	-27.03	0-360


Pk - Peak detector

\*\* Fundamental

Note 1 : Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

### 8.1.2. SPURIOUS EMISSION 0.009 TO 30 MHz

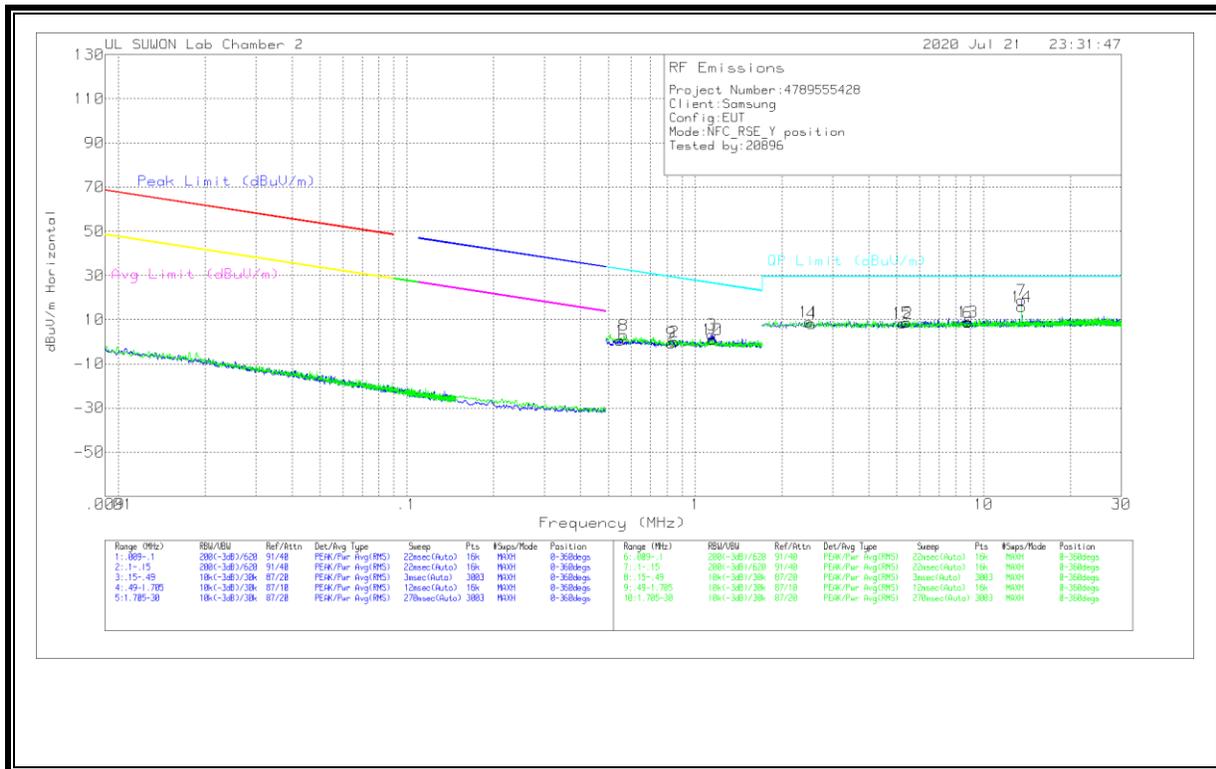

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.54795	20.76	Pk	19.7	.1	-40	.56	32.83	-32.27	0-360
2	.84602	19.91	Pk	19.8	.2	-40	-.09	29.07	-29.16	0-360
3	1.14371	23.32	Pk	19.8	.2	-40	3.32	26.46	-23.14	0-360
4	2.5344	28.05	Pk	19.9	.3	-40	8.25	29.5	-21.25	0-360
5	5.40903	28.56	Pk	19.8	.4	-40	8.76	29.5	-20.74	0-360
6	8.8303	28.44	Pk	20	.4	-40	8.84	29.5	-20.66	0-360
**7	13.56165	38.36	Pk	20	.5	-40	18.86	29.5	-10.64	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.56627	23.08	Pk	19.7	.1	-40	2.88	32.55	-29.67	0-360
9	.82881	19.34	Pk	19.8	.2	-40	-.66	29.25	-29.91	0-360
10	1.14938	21.07	Pk	19.8	.2	-40	1.07	26.42	-25.35	0-360
11	2.47785	28.75	Pk	19.9	.3	-40	8.95	29.5	-20.55	0-360
12	5.2488	28.29	Pk	19.8	.4	-40	8.49	29.5	-21.01	0-360
13	8.81145	28.66	Pk	20	.4	-40	9.06	29.5	-20.44	0-360
**14	13.56165	35.27	Pk	20	.5	-40	15.77	29.5	-13.73	0-360


Pk - Peak detector

\*\* Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal. Please refer to section 8.1.1 about the fundamental level. Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

### 8.1.3. TX SPURIOUS EMISSION 30 TO 1000 MHz

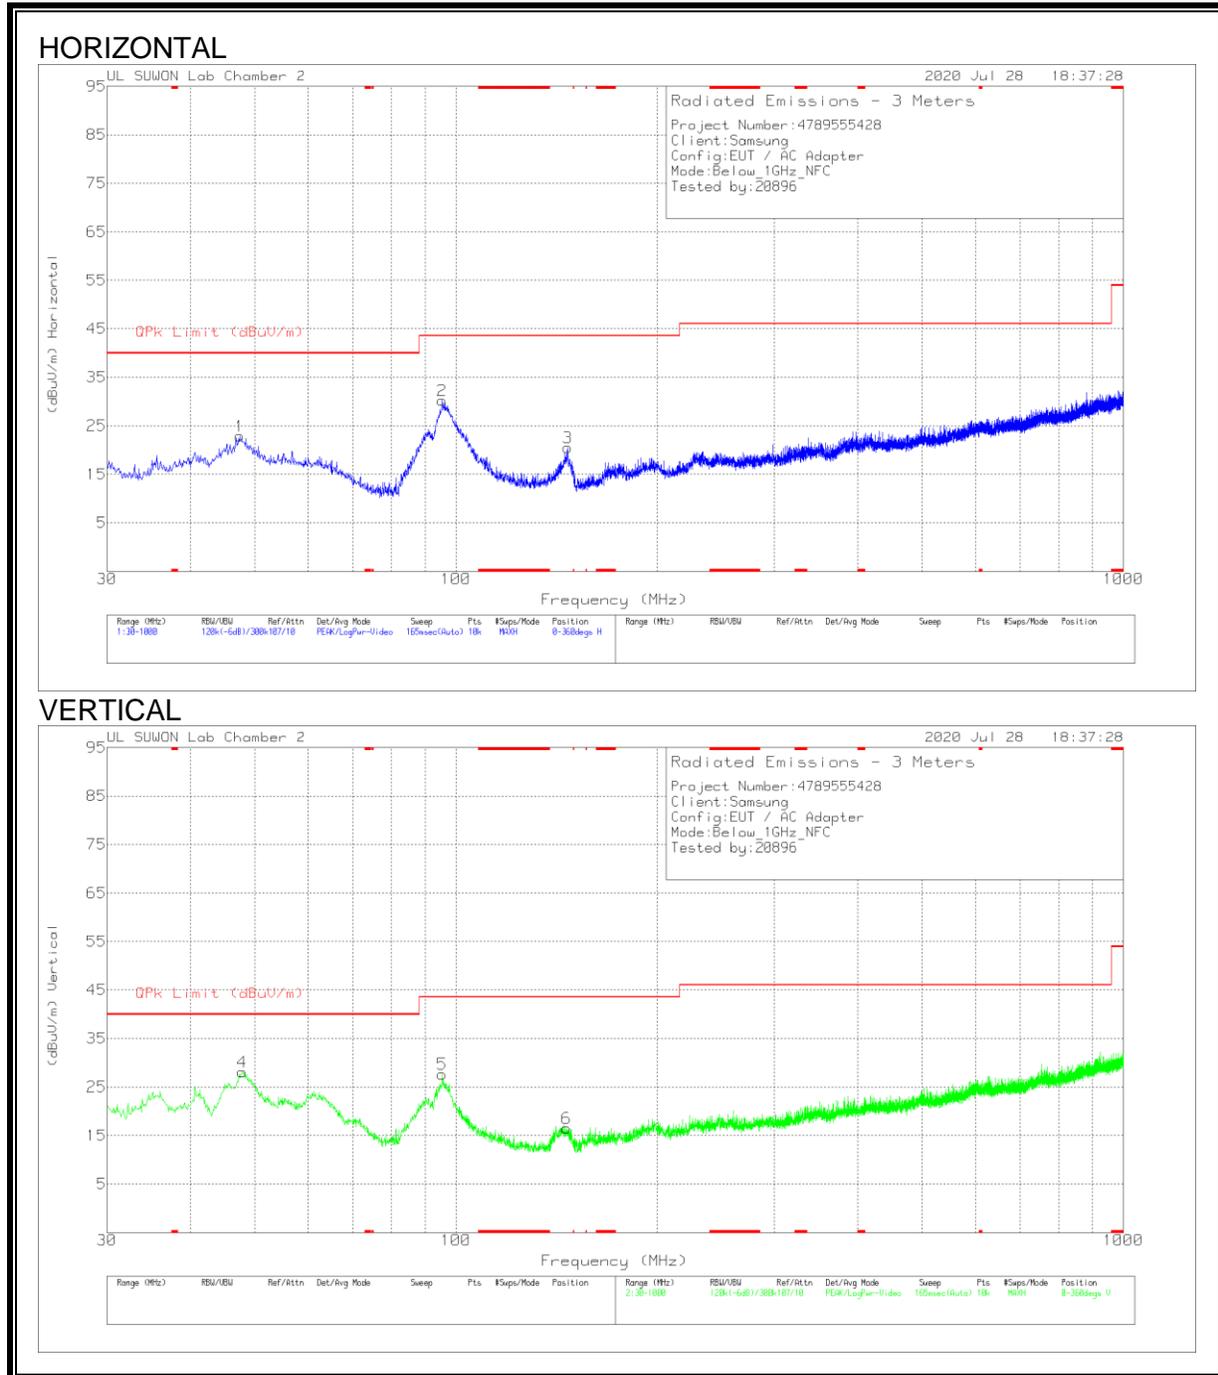


Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	47.46	34.84	Pk	19.8	-31.8	22.84	40	-17.16	0-360	400	H
2	95.281	44.58	Pk	17.2	-31.5	30.28	43.52	-13.24	0-360	300	H
3	146.982	37.41	Pk	14.1	-31	20.51	43.52	-23.01	0-360	200	H
4	47.848	40.15	Pk	19.8	-31.8	28.15	40	-11.85	0-360	100	V
5	95.378	41.77	Pk	17.3	-31.4	27.67	43.52	-15.85	0-360	100	V
6	146.303	33.5	Pk	14.1	-31.1	16.5	43.52	-27.02	0-360	100	V

Pk - Peak detector

### 8.1.4. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.15 – 30 MHz) [EUT with passive TAG mode]

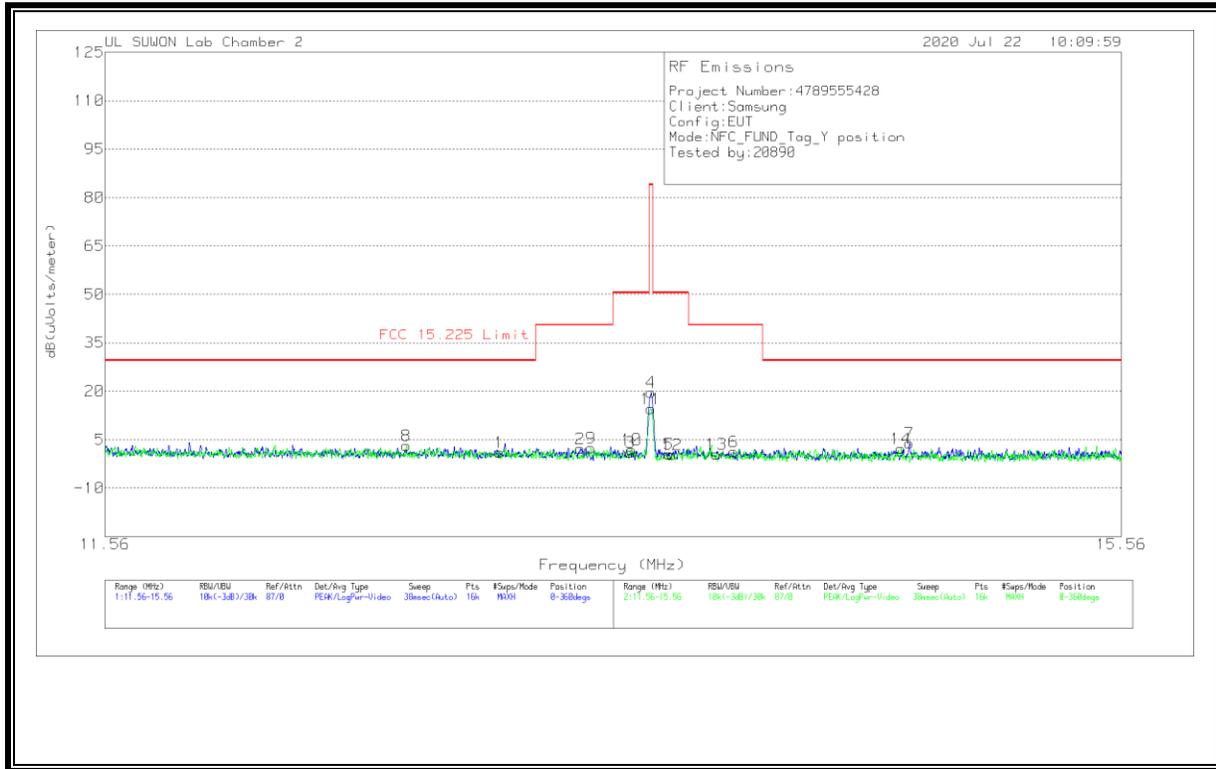

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
1	12.97138	20.57	Pk	20	-40	.5	1.07	29.54	-28.47	0-360
2	13.28338	21.74	Pk	20	-40	.5	2.24	40.51	-38.27	0-360
3	13.47988	20.58	Pk	20	-40	.5	1.08	50.5	-49.42	0-360
**4	13.56025	39.2	Pk	20	-40	.5	19.7	84	-64.3	0-360
5	13.63313	19.99	Pk	20	-40	.6	.59	50.5	-49.91	0-360
6	13.89163	20.66	Pk	20	-40	.6	1.26	40.51	-39.25	0-360
7	14.62575	23.38	Pk	20	-40	.6	3.98	29.54	-25.56	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Dist Corr 30m	Cable Loss	Corrected Reading dB(uVolts/meter)	FCC 15.225 Limit	Margin (dB)	Azimuth (Degs)
8	12.62513	22.65	Pk	20	-40	.5	3.15	29.54	-26.39	0-360
9	13.32475	21.88	Pk	20	-40	.5	2.38	40.51	-38.13	0-360
10	13.48413	21.44	Pk	20	-40	.5	1.94	50.5	-48.56	0-360
**11	13.55988	34.12	Pk	20	-40	.5	14.62	84	-69.38	0-360
12	13.64463	19.78	Pk	20	-40	.6	.38	50.5	-50.12	0-360
13	13.82263	19.98	Pk	20	-40	.6	.58	40.51	-39.93	0-360
14	14.58963	21.59	Pk	20	-40	.6	2.19	29.54	-27.35	0-360


Pk - Peak detector

\*\* Fundamental

Note 1: Although these tests were performed other than open filed test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

### 8.1.5. SPURIOUS EMISSION 0.09 TO 30 MHz [EUT with passive TAG mode]

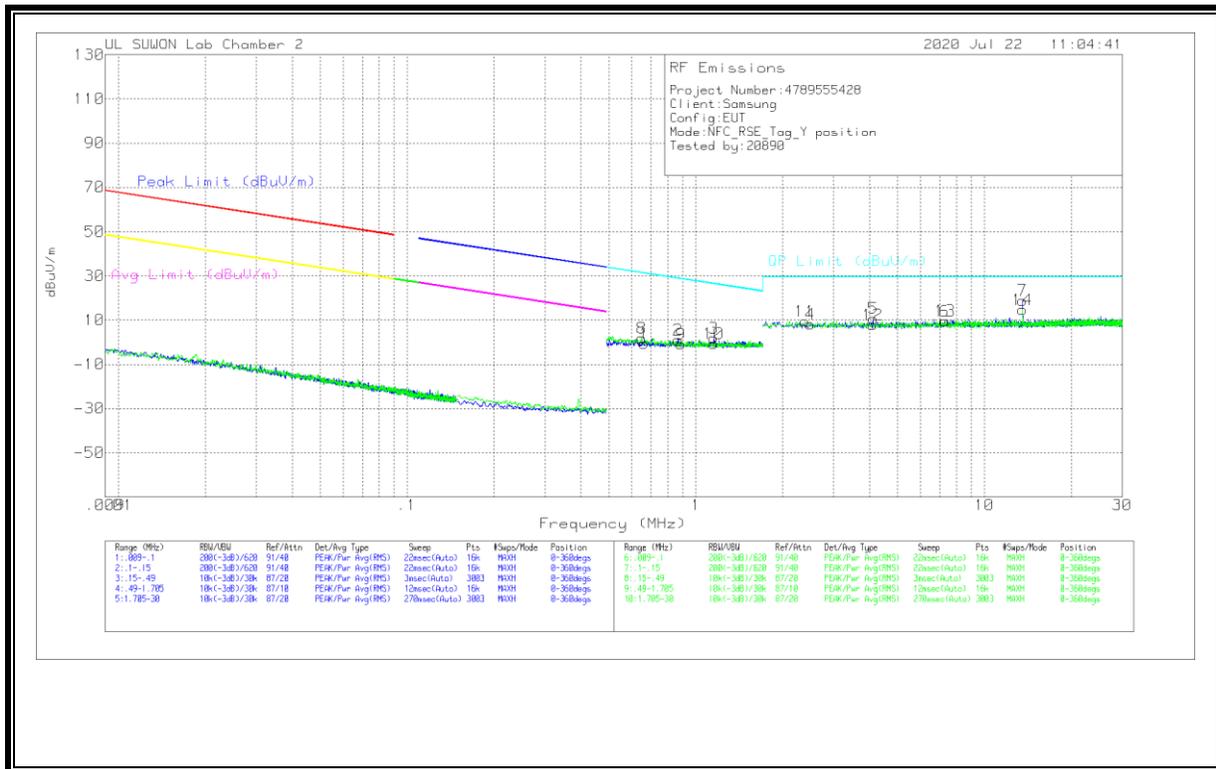

Trace Markers

[Face On]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
1	.66146	19.76	Pk	19.7	.1	-40	-.44	31.2	-31.64	0-360
2	.86909	20.96	Pk	19.8	.2	-40	.96	28.84	-27.88	0-360
3	1.15428	21.83	Pk	19.8	.2	-40	1.83	26.38	-24.55	0-360
4	2.4967	28.08	Pk	19.9	.3	-40	8.28	29.5	-21.22	0-360
5	4.10838	30.69	Pk	19.8	.3	-40	10.79	29.5	-18.71	0-360
6	7.26575	29.17	Pk	19.9	.4	-40	9.47	29.5	-20.03	0-360
**7	13.56165	38.48	Pk	20	.5	-40	18.98	29.5	-10.52	0-360

[Face Off]

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	HFH2-Z2_Loop Antenna	Cable Loss	Dist Corr 30m	Corrected Reading dBuV/m	QP Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)
8	.64933	22.15	Pk	19.7	.1	-40	1.95	31.36	-29.41	0-360
9	.88881	19.26	Pk	19.8	.2	-40	-.74	28.64	-29.38	0-360
10	1.15318	19.56	Pk	19.8	.2	-40	-.44	26.39	-26.83	0-360
11	2.3836	29.36	Pk	19.9	.2	-40	9.46	29.5	-20.04	0-360
12	4.08953	27.94	Pk	19.8	.3	-40	8.04	29.5	-21.46	0-360
13	7.3223	29.39	Pk	19.9	.4	-40	9.69	29.5	-19.81	0-360
**14	13.56165	34.19	Pk	20	.5	-40	14.69	29.5	-14.81	0-360


Pk - Peak detector

\*\* Fundamental

Note 1: The data for marker number 7 and 14 are the fundamental signal. Please refer to section 8.1.4 about the fundamental level. Frequency range 0.009MHz ~ 0.490MHz, only noise floor level and more than 20dB margin.

Note 2: Radiated test were investigated with three receiving antenna axes: Face-on, Face-off and horizontal (parallel to the ground plane) and the worse orientations of Face-on and Face-off were set for final test.

### 8.1.6. TX SPURIOUS EMISSION 30 TO 1000 MHz [EUT with passive TAG mode]

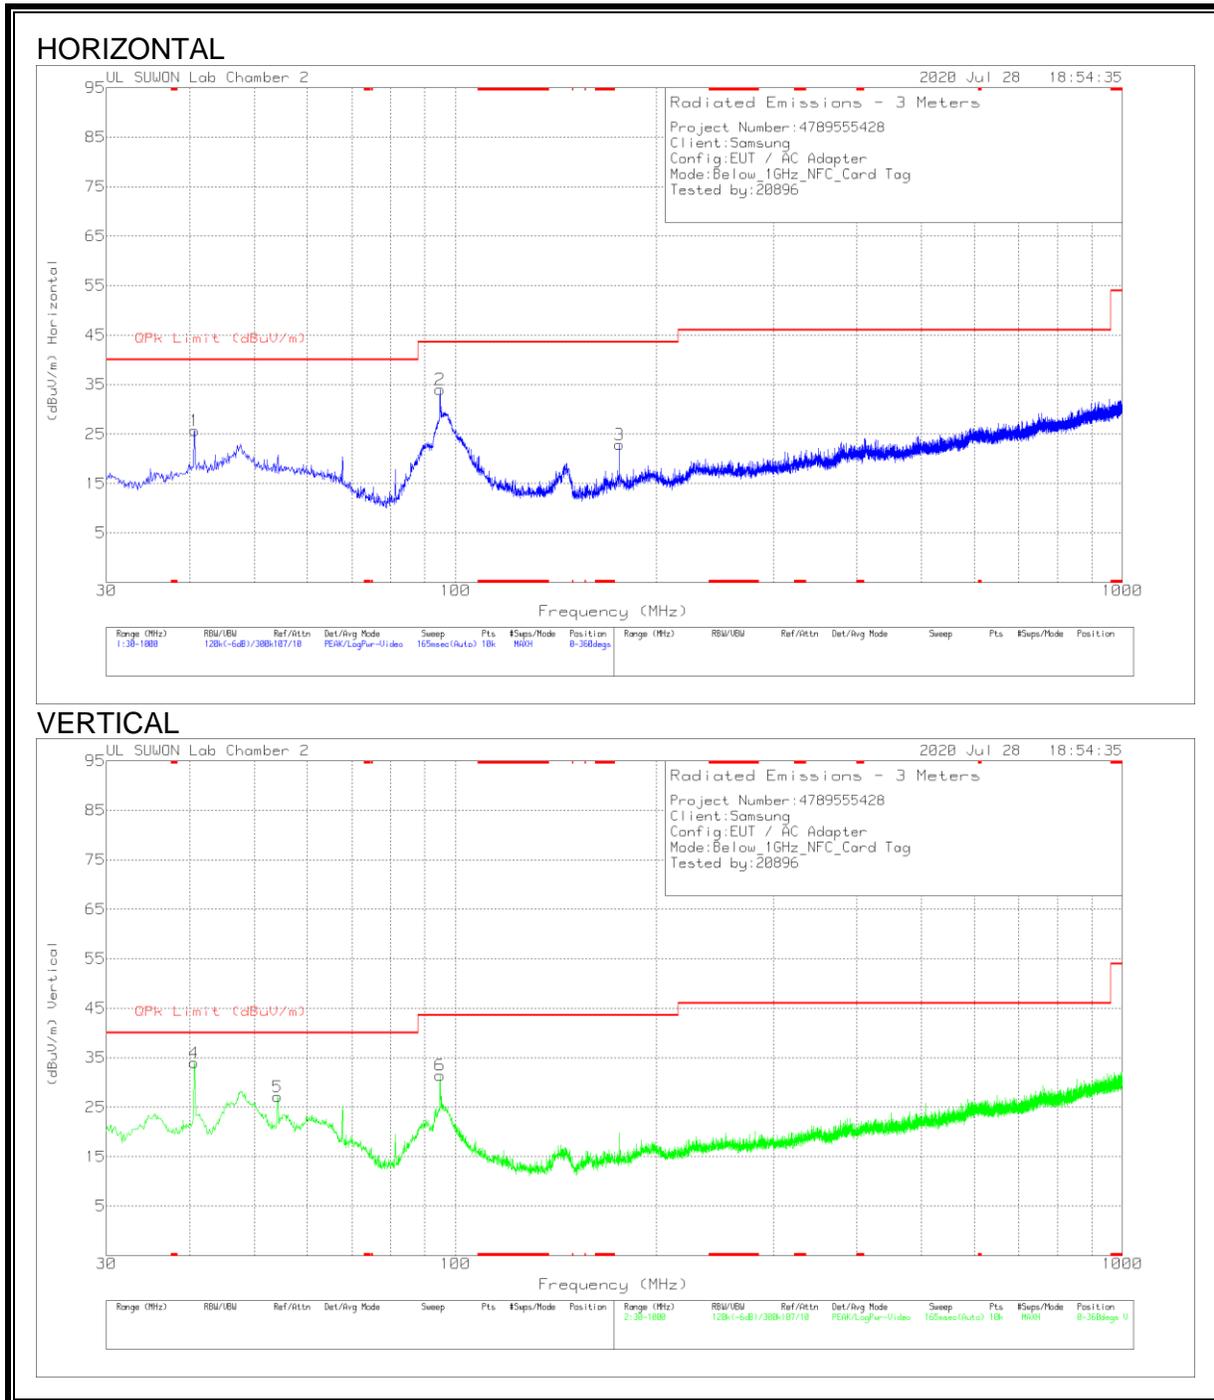

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163_749	Below_1G[dB]	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	40.67	38.58	Pk	18.9	-31.8	25.68	40	-14.32	0-360	400	H
2	94.893	48.2	Pk	17.2	-31.4	34	43.52	-9.52	0-360	300	H
3	176.276	38.56	Pk	15.2	-30.9	22.86	43.52	-20.66	0-360	100	H
4	40.573	46.96	Pk	18.9	-31.9	33.96	40	-6.04	0-360	100	V
5	54.153	39.4	Pk	19.4	-31.7	27.1	40	-12.9	0-360	100	V
6	94.893	45.67	Pk	17.2	-31.4	31.47	43.52	-12.05	0-360	100	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band  
 Pk - Peak detector

## 9. AC MAINS LINE CONDUCTED EMISSIONS

### LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

No non-compliance noted:

**WORST EMISSIONS**

**LINE 1 PLOT**

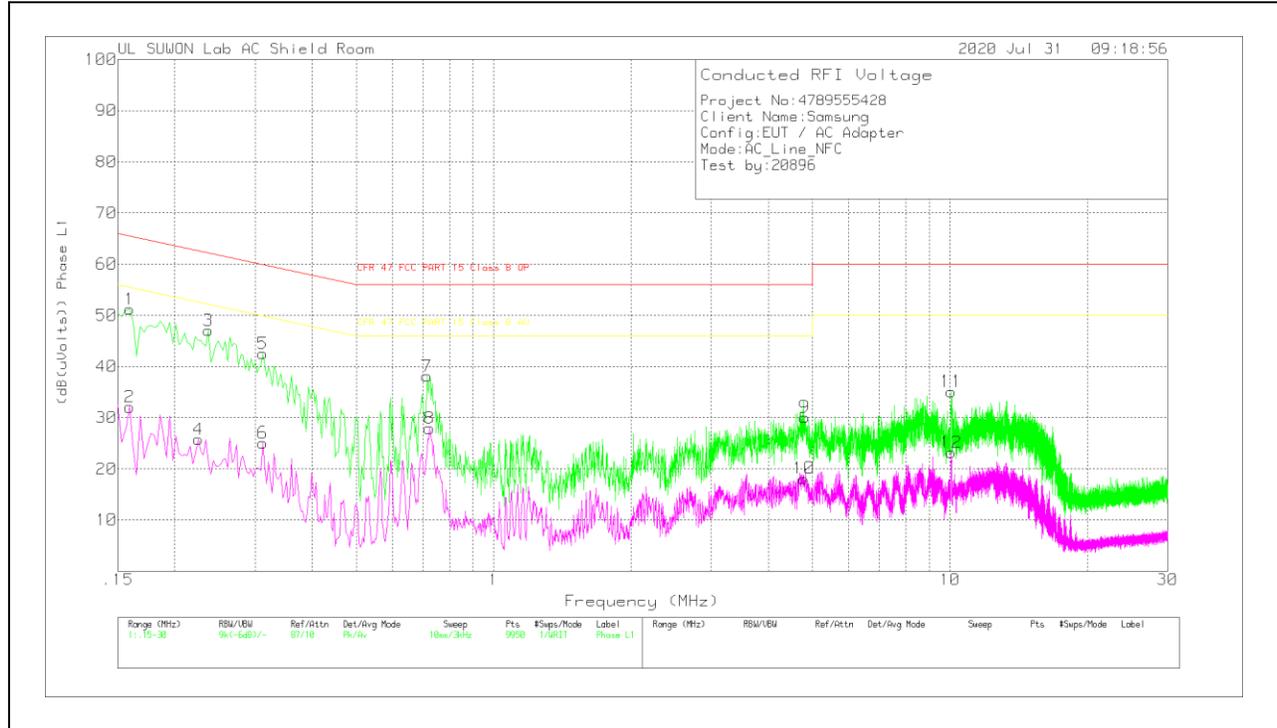

**LINE 1 RESULTS**


Trace Markers

Range 1: Phase L1 .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h Ex_L1[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
1	.159	41.19	Pk	9.9	.1	51.19	65.52	-14.33	-	-
2	.159	22.08	Av	9.9	.1	32.08	-	-	55.52	-23.44
3	.237	37.15	Pk	9.7	.2	47.05	62.2	-15.15	-	-
4	.225	15.76	Av	9.8	.2	25.76	-	-	52.63	-26.87
5	.312	32.51	Pk	9.8	.2	42.51	59.92	-17.41	-	-
6	.312	15.05	Av	9.8	.2	25.05	-	-	49.92	-24.87
7	.714	28.01	Pk	9.9	.2	38.11	56	-17.89	-	-
8	.723	17.83	Av	9.9	.2	27.93	-	-	46	-18.07
9	4.8	20	Pk	9.8	.3	30.1	56	-25.9	-	-
10	4.782	8.03	Av	9.8	.3	18.13	-	-	46	-27.87
11	10.065	24.69	Pk	10	.4	35.09	60	-24.91	-	-
12	10.059	12.79	Av	10	.4	23.19	-	-	50	-26.81

Pk - Peak detector  
 Av - Average detection

LINE 2 PLOT

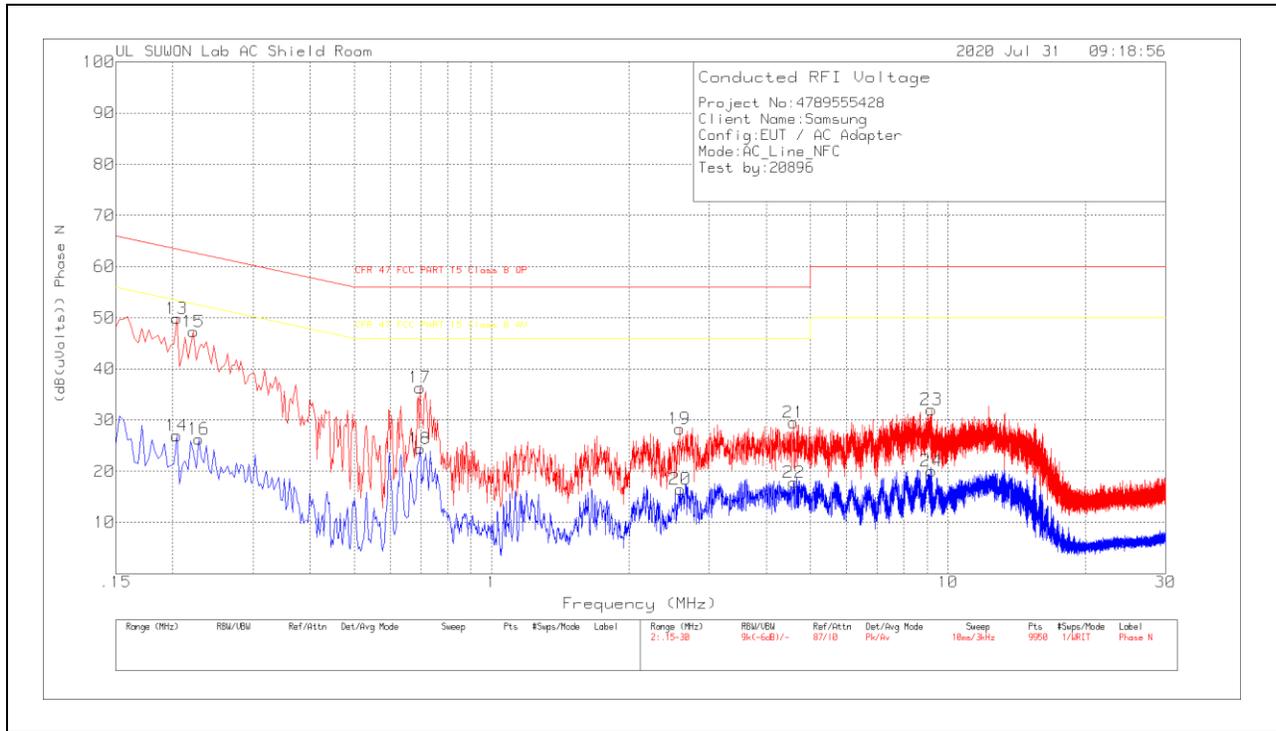

LINE 2 RESULTS

Trace Markers

Range 2: Phase N .15 - 30MHz

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	101836_Wit h EX_N[dB]	CABLELOS S(dB)	Corrected Reading (dB(uVolts))	CFR 47 FCC PART 15 Class B QP	Margin (dB)	CFR 47 FCC PART 15 Class B AV	Margin (dB)
13	.204	39.75	Pk	9.9	.2	49.85	63.45	-13.6	-	-
14	.204	16.85	Av	9.9	.2	26.95	-	-	53.45	-26.5
15	.222	37.28	Pk	9.8	.2	47.28	62.74	-15.46	-	-
16	.228	16.3	Av	9.8	.2	26.3	-	-	52.52	-26.22
17	.696	26.24	Pk	9.9	.2	36.34	56	-19.66	-	-
18	.696	14.3	Av	9.9	.2	24.4	-	-	46	-21.6
19	2.58	18.2	Pk	9.8	.3	28.3	56	-27.7	-	-
20	2.589	6.43	Av	9.8	.3	16.53	-	-	46	-29.47
21	4.59	19.43	Pk	9.8	.3	29.53	56	-26.47	-	-
22	4.596	7.71	Av	9.8	.3	17.81	-	-	46	-28.19
23	9.198	21.74	Pk	9.9	.4	32.04	60	-27.96	-	-
24	9.198	9.74	Av	9.9	.4	20.04	-	-	50	-29.96

Pk - Peak detector  
 Av - Average detection

## 10. FREQUENCY STABILITY

### LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

### TEST PROCEDURE

ANSI C63.10 §6.8

### RESULTS

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: $\pm 100$ ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
3.86	50	13.559973340	3.879	13.559965766	4.438	13.559959005	4.936	13.559955643	5.184	100
3.86	40	13.56002914	1.698	13.559991075	2.571	13.559983383	3.138	13.559977665	3.560	100
3.86	30	13.560019816	0.452	13.560015023	0.805	13.560011968	1.030	13.560008940	1.254	100
<b>3.86</b>	<b>20</b>	<b>13.560025940</b>	<b>0</b>	<b>13.560023389</b>	0.188	<b>13.560022468</b>	0.256	<b>13.560021067</b>	0.359	<b>100</b>
3.86	10	13.560006413	1.440	13.560029618	-0.271	13.560046236	-1.497	13.560061848	-2.648	100
3.86	0	13.560075354	-3.644	13.560084002	-4.282	13.560089560	-4.692	13.560094245	-5.037	100
3.86	-10	13.560102940	-5.678	13.560102854	-5.672	13.560102561	-5.651	13.560102538	-5.649	100
3.86	-20	13.560098808	-5.374	13.560094440	-5.052	13.560090141	-4.735	13.560087147	-4.514	100
3.86	-30	13.560067083	-3.034	13.560055849	-2.206	13.560042816	-1.245	13.560032054	-0.451	100

Reference Frequency: EUT Channel 13.56 MHz @ 20°C Limit: $\pm 100$ ppm = 1.356 kHz										
Power Supply (Vdc)	Envir. Temp (°C)	Frequency Deviation Measured with Time Elapse								
		Start up (MHz)	Delta (ppm)	@ 2mins (MHz)	Delta (ppm)	@ 5mins (MHz)	Delta (ppm)	@ 10 mins (MHz)	Delta (ppm)	Limit (ppm)
<b>3.86</b>	<b>20</b>	<b>13.560025940</b>	<b>0</b>	<b>13.560023389</b>	0.188	<b>13.560022468</b>	0.256	<b>13.560021067</b>	0.359	<b>100</b>
4.40	20	13.560024312	0.120	13.560023283	0.196	13.560022363	0.264	13.560020878	0.373	100
3.65	20	13.560024085	0.137	13.560023208	0.201	13.560022310	0.268	13.560020810	0.378	100

No non-compliance noted.

## END OF TEST REPORT