



# CERTIFICATION TEST REPORT

**Report Number** : 4789555428-E9V3

**Applicant** : SAMSUNG ELECTRONICS CO., LTD.  
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,  
GYEONGGI-DO, 16677, KOREA

**Model** : SM-G781B/DS, SM-G781B

**FCC ID** : A3LSMG781B

**EUT Description** : GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax,  
WPT and NFC

**Test Standard(s)** : FCC 47 CFR PART 1 SUBPART I  
FCC 47 CFR PART 2 SUBPART J

**Date Of Issue:**  
September 02, 2020

**Prepared by:**  
UL Korea, Ltd.  
26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea

Suwon Test Site: UL Korea, LTD. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu  
Suwon-si, Gyeonggi-do, 16675, Korea  
TEL: (031) 337-9902  
FAX: (031) 213-5433



REPORT REVISION HISTORY

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/14/20	Initial issue	Sungeun Lee
V2	08/24/20	Updated to address TCB's question	Sungeun Lee
V3	09/02/20	Updated to address TCB's question	Sungeun Lee

---

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. EQUIPMENT UNDER TEST .....</b>	<b>5</b>
4.1. DESCRIPTION OF EUT.....	5
4.2. WORST-CASE CONFIGURATION .....	5
4.3. KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL CONSIDERATIONS	6
4.4. DESCRIPTION OF TEST SETUP .....	7
<b>5. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>6. MAXIMUM PERMISSIBLE RF EXPOSURE .....</b>	<b>9</b>
6.1. FCC LIMITS AND SUMMARY.....	9
6.1.1. FCC LIMITS.....	9
6.2. TEST RESULTS .....	10
6.2.1. FCC RF EXPOSURE.....	10
6.2.2. FCC SUMMARY OF RESULTS.....	12

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, WPT and NFC  
**MODEL:** SM-G781B/DS, SM-G781B  
**SERIAL NUMBER:** R3CN7038YAF (RADIATED);  
**DATE TESTED:** AUG 14, 2020;

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I	Complies
FCC PART 2 SUBPART J	

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Junwhan Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

Tested By:



Sungeun Lee  
Suwon Lab Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro
<input checked="" type="checkbox"/> Shield Room 1

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <https://www.iasonline.org/wp-content/uploads/2017/05/TL-637-cert-New.pdf>.

## 4. EQUIPMENT UNDER TEST

### 4.1. DESCRIPTION OF EUT

The EUT has WPT (Wireless Power Transfer) feature which has inductive charging coil to charge phone or watch. The charging frequency is between 110 kHz to 148 kHz, and the maximum power consumption is 9.0 W in charging status.

This report covers the Samsung models SM-G781B/DS and SM-G781B. These models are identical in hardware except SM-G781B /DS has dual SIM tray. With some pre-scan, model SM-G781B /DS(Dual SIM tray) was set for final test.

### 4.2. WORST-CASE CONFIGURATION

Test configuration	Description
DUT to Phone test configuration 1	Charging from Phone to DUT
DUT to Phone test configuration 2	Charging from Phone to DUT (TA Charging from DUT)
DUT to Phone test configuration 3	Charging from Phone to DUT
DUT to Phone test configuration 4	Charging from Phone to DUT (TA Charging from DUT)
DUT to Watch test configuration 5	Charging from Watch to DUT
DUT to Watch test configuration 6	Charging from Watch to DUT (TA Charging from DUT)

**Note:**

Configuration 2, 4 and 6 were tested with the worst case of configuration 1, 3 and 5.

**4.3. KDB 680106 D01 v03 SECTION 5.b) EQUIPMENT APPROVAL  
 CONSIDERATIONS**

Requirement	Device
(1) Power transfer frequency is less than 1 MHz.	Yes. Operating Frequency is between 110kHz to 148 kHz.
(2) Output power from each primary coil is less than or equal to 15 watts.	Yes. Maximum power is 9.0 Watts.
(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.	Yes.
(4) Client device is placed directly in contact with the transmitter.	Yes.
(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	Yes.
(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes. The aggregate field at 15 cm from the device are 10.67 % of the FCC H field limit.

## 4.4. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT & PERIPHERALS

SUPPROT EQUIPMENT & PERIPHERALS LIST				
Description	Manufacturer	Model	Serial Numver	FCC ID
Phone	Samsung Electronics Co., Ltd.	SM-G986B/DS	R3CMB0C70XN	A3LSMG986B
Watch	Samsung Electronics Co., Ltd.	SM-R835F	RFAM90ZXFTF	A3LSMR835
Traver Adapter	Samsung Electronics Co., Ltd.	EP-TA200	R37MCQS5HH1DK3	DoC
USB Data Cable	Samsung Electronics Co., Ltd.	EP-DR140ABE	-	-

### TEST SETUP


The following three modes are tested in test configurations;

Mode
Operating (SUPPORT Equipment, <10% Power Charging)
Operating (SUPPORT Equipment, 50~55% Power Charging)
Operating (SUPPORT Equipment, 90~95% Power Charging)


### MEASUREMENT TEST SETUP

The measurement was taken using a probe placed 15 cm surrounding the device and 20 cm above the top surface of the EUT. Measurements were taken the top (charger below/above client) and all sides of the EUT per KDB680106 D01 v03 and RF Exposure Procedures (Wireless Power Transfer) in TCB Workshop October, 2018.


#### DUT to phone test Configuration 1 & 2

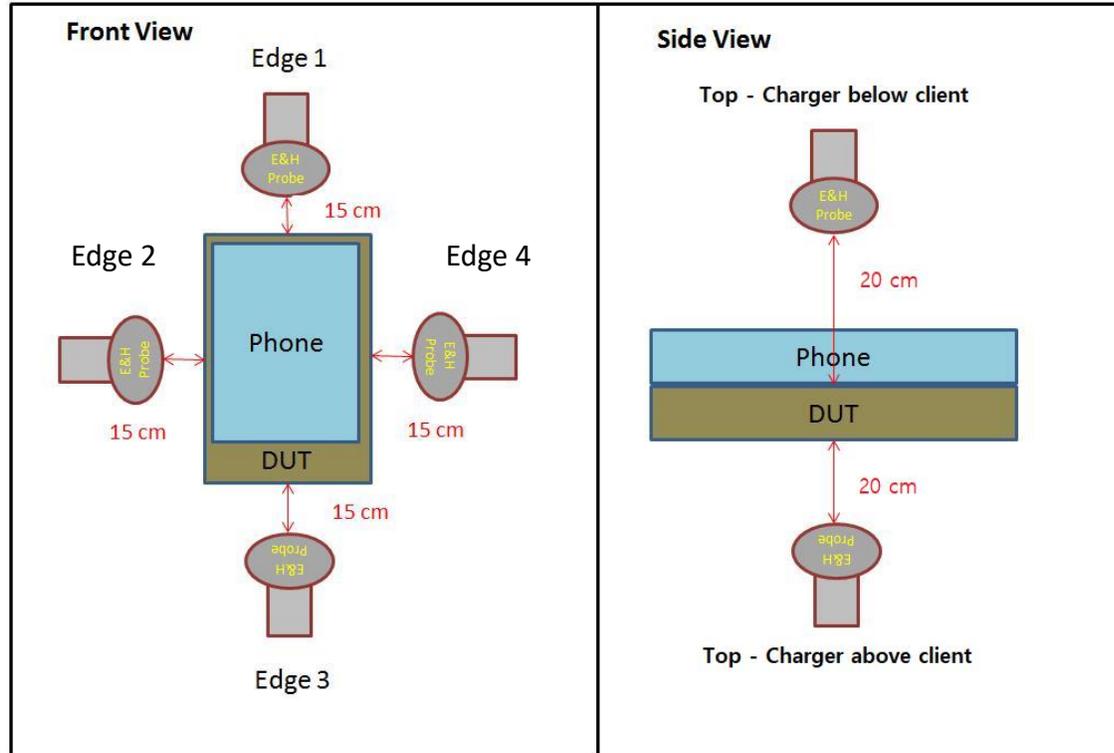

DUT to phone test Configuration 3 & 4

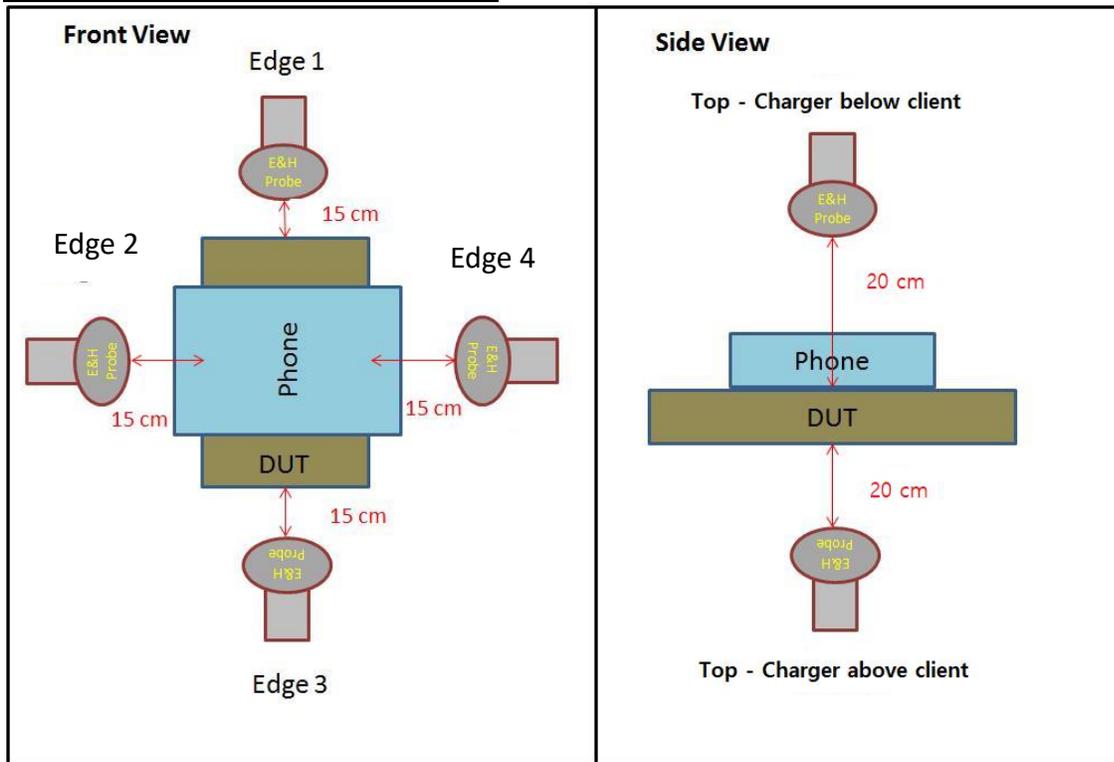

DUT to Watch test Configuration 5 & 6

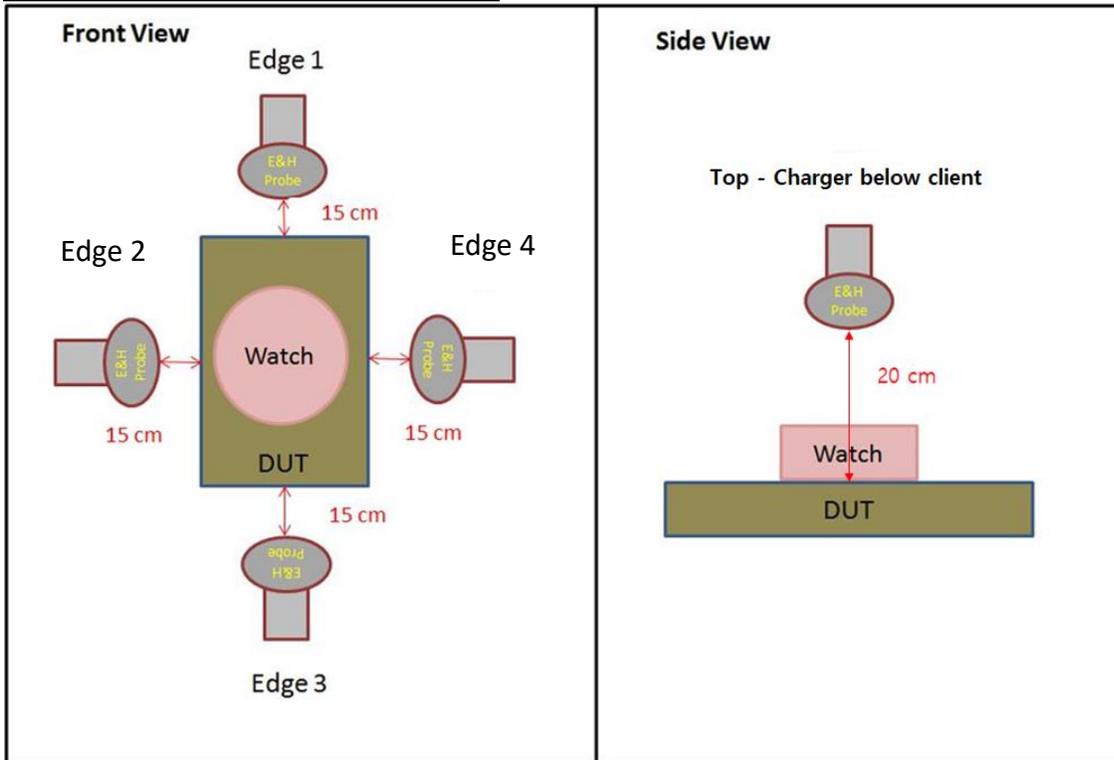

## 5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was used for the tests documented in this report;

Test Equipment List					
Description	Manufacturer	Model	Serial Numver	Cal Date	Cal Due
Electric and Magnetic Field Probe	Narda	EHP-200AC	170WX91008	8-12-2020	8-12-2021

## 6. MAXIMUM PERMISSIBLE RF EXPOSURE

### 6.1. FCC LIMITS AND SUMMARY

#### 6.1.1. FCC LIMITS

§ 1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in § 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of § 2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

## 6.2. TEST RESULTS

### 6.2.1. FCC RF EXPOSURE

#### H-FIELD MEASUREMENTS

Note: Peak measurement were performed. Since the peak h-field measured value is less than 10% of the SAR limit(1.63 A/m), duty cycle compensation was excluded.

Additional test was performed in each Test mode by moving the probe surrounding the device to find the maximum exposure.

#### **TEST results of DUT to phone test Configuration 1 & 2**

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 1	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.018
			Top - charger below client		0.022
			Edge 1		0.021
			Edge 2		0.020
			Edge 3		0.019
			Edge 4		0.020
			max		0.022
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.019
			Top - charger below client		0.021
			Edge 1		0.022
			Edge 2		0.023
			Edge 3		0.023
			Edge 4		0.020
			max		<b>0.023</b>
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.022
			Top - charger below client		0.020
			Edge 1		0.019
			Edge 2		0.023
			Edge 3		0.020
			Edge 4		0.019
			max		0.023
Configuration 2	Operating Real Product (Power 50~55% charging)	Edge 2	0.023		
		max	<b>0.024</b>		

**TEST results of DUT to phone test Configuration 3 & 4**

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 3	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger above client	1.63	0.090
			Top - charger below client		0.093
			Edge 1		0.085
			Edge 2		0.170
			Edge 3		0.064
			Edge 4		0.101
			max		0.170
	Operating Real Product (Power 50~55% charging)		Top - charger above client		0.095
			Top - charger below client		0.093
			Edge 1		0.094
			Edge 2		0.171
			Edge 3		0.070
			Edge 4		0.111
			max		<b>0.171</b>
	Operating Real Product (Power 90~95% charging)		Top - charger above client		0.092
			Top - charger below client		0.091
			Edge 1		0.089
			Edge 2		0.165
			Edge 3		0.072
			Edge 4		0.104
			max		0.165
Configuration 4	Operating Real Product (Power 50~55% charging)	Edge 2	0.171		
		max	<b>0.174</b>		

**TEST results of DUT to phone test Configuration 5 & 6**

FCC RF Exposure Result					
Test Configuration	Test mode	Test distance	Test Position	H-Field Limit (A/m)	H-Field meas data (A/m)
Configuration 5	Operating Real Product (Power <10% charging)	15 cm probe to edges of EUT and 20 cm probe to top surface of the EUT	Top - charger below client	1.63	0.135
			Edge 1		0.018
			Edge 2		0.045
			Edge 3		0.018
			Edge 4		0.020
	max		0.135		
	Operating Real Product (Power 50~55% charging)		Top - charger below client		<b>0.148</b>
			Edge 1		0.022
			Edge 2		0.049
			Edge 3		0.020
			Edge 4		0.021
	max		0.148		
	Operating Real Product (Power 90~95% charging)		Top - charger below client		0.147
			Edge 1		0.021
			Edge 2		0.050
Edge 3		0.021			
Edge 4		0.023			
max	0.147				
Configuration 6	Operating Real Product (Power 50~55% charging)	Top - charger below client	0.148		
		max	<b>0.150</b>		

**6.2.2. FCC SUMMARY OF RESULTS**

H-Field Limit		
FCC RF Exposure	Maximum meas data (A/m)	Percentage (%)
1.63	0.174	<b>10.67</b>

**Conclusion:**

H-Field result is less than 50% of the MPE limit.

**END OF TEST REPORT**