

# FCC DTS REPORT

## Certification

<b>Applicant Name:</b> SAMSUNG Electronics Co., Ltd.	<b>Date of Issue:</b> August 27, 2020
<b>Address:</b> 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	<b>Test Site/Location:</b> 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
	<b>Report No.:</b> HCT-RF-2008-FC066

<b>FCC ID:</b>	<b>A3LSMG781U</b>
<b>APPLICANT:</b>	<b>SAMSUNG Electronics Co., Ltd.</b>
<b>According to the Evaluation report, all of the data contained herein is reused from the reference FCC ID : A3LSMG781V report.</b>	

<b>Model:</b>	SM-G781U
<b>Additional Model</b>	SM-G781U1/DS, SM-G781W
<b>EUT Type:</b>	Mobile Phone
<b>Average Output Power:</b>	802.11ax(HE20) Ant.1 (SISO): 15.93 dBm 802.11ax(HE20) Ant 2 (SISO): 17.42 dBm 802.11ax(HE20) Ant 1&2 (MIMO): 19.74 dBm
<b>Frequency Range:</b>	2 412 MHz ~ 2 472 MHz (US Only: 2 412 MHz ~ 2 462 MHz)
<b>Modulation type:</b>	OFDMA
<b>FCC Classification:</b>	Digital Transmission System(DTS)
<b>FCC Rule Part(s):</b>	Part 15.247

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules under normal use and maintenance.

Report No.: HCT-RF-2008-FC066

---

REVIEWED BY



---

Report prepared by : Jung Ki Lim  
Engineer of Telecommunication Testing Center

---

Report approved by : Jong Seok Lee  
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked \*.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

\* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2008-FC066	August 27, 2020	- First Approval Report

# Table of Contents

REVIEWED BY .....	2
1. EUT DESCRIPTION .....	5
ANTENNA CONFIGURATIONS .....	6
2. TEST METHODOLOGY .....	8
EUT CONFIGURATION .....	8
EUT EXERCISE .....	8
GENERAL TEST PROCEDURES .....	8
DESCRIPTION OF TEST MODES .....	8
3. INSTRUMENT CALIBRATION.....	9
4. FACILITIES AND ACCREDITATIONS .....	9
FACILITIES .....	9
EQUIPMENT .....	9
5. ANTENNA REQUIREMENTS .....	10
6. MEASUREMENT UNCERTAINTY .....	10
7. DESCRIPTION OF TESTS.....	11
8. SUMMARY TEST OF RESULTS .....	29
9. TEST RESULT .....	30
9.1 DUTY CYCLE.....	30
9.2 6dB BANDWIDTH.....	33
9.3 OUTPUT POWER .....	37
9.4 POWER SPECTRAL DENSITY .....	43
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS.....	50
9.6 RADIATED SPURIOUS EMISSIONS .....	58
9.7 RADIATED RESTRICTED BAND EDGES .....	68
10. LIST OF TEST EQUIPMENT .....	79
11. ANNEX A_ TEST SETUP PHOTO .....	81

**1. EUT DESCRIPTION**

<b>Model</b>	SM-G781U		
<b>Additional Model</b>	SM-G781U1/DS, SM-G781W		
<b>EUT Type</b>	Mobile Phone		
<b>Power Supply</b>	DC 3.85 V		
<b>Battery Information</b>	Model: EB-BG781ABY Type: Li-ion Battery		
<b>Travel Adapter Information (15W)</b>	Model : EP-TA200 Manufacture: DONGYANG E&P		
<b>Travel Adapter Information (25W)</b>	Model : EP-TA800 Manufacture: DONGYANG E&P		
<b>Data Cable Information (15W)</b>	Model : EP-DG780BWE Manufacture: KSD		
<b>Data Cable Information (25W)</b>	Model : EP-DG980BBE Manufacture: KSD		
<b>Ear-jack Information</b>	Model : GH59-15252A Manufacture: CRESYN		
<b>Frequency Range</b>	2 412 MHz ~ 2 472 MHz(US Only: 2 412 MHz ~ 2 462 MHz)		
<b>Max. RF Output Power</b>	<u>Peak Power</u> (For information only)	Ant. 1 (SISO)	23.22 dBm
		Ant.2 (SISO)	24.93 dBm
		Ant.1&2 (MIMO)	27.12 dBm
	<u>Average Power</u>	Ant. 1 (SISO)	15.93 dBm
		Ant.2 (SISO)	17.42 dBm
		Ant.1&2 (MIMO)	19.74 dBm
<b>Modulation Type</b>	OFDMA		
<b>Number of Channels</b>	13 Channels		
<b>Antenna Specification</b>	Ant.1 Antenna type: Metal Peak Gain: -2.00 dBi	Ant.2 Antenna type: LDS+ metal Peak Gain: -8.02 dBi	
<b>Date(s) of Tests</b>	July 08, 2020 ~ August 13, 2020		

**ANTENNA CONFIGURATIONS**

1. The device employs MIMO technology. Below are the possible configurations

Configurations	SISO		SDM	CDD
	Ant1	Ant2	Ant1 + Ant2	Ant1 + Ant2
802.11ax(HE20)	O	O	O	O

**Note:**

- (1) O = Support, X = Not Support
- (2) SISO = Single Input Single Output
- (3) SDM = Spatial Diversity Multiplexing
- (4) CDD = Cyclic Delay Diversity

2.This device supports simultaneous transmission operation, which allows for two channels to operate independent of one another in the 2.4GHz and 5GHz bands simultaneously on each antenna.

RSDB Scenario	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5GHz WiFi Ant.1	5GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2
2.4 GHz WiFi MIMO + 5GHz WiFi	On	On	On			
2.4 GHz WiFi MIMO + 5GHz WiFi MIMO	On	On	On	On		
2.4 GHz WiFi + 5GHz WiFi + Bluetooth		On	On		On	
2.4 GHz WiFi + 5GHz WiFi MIMO + Bluetooth		On	On	On	On	

Non-DBS	2.4 GHz WiFi Ant.1	2.4 GHz WiFi Ant.2	5GHz WiFi Ant.1	5GHz WiFi Ant.2	Bluetooth Ant.1	Bluetooth Ant.2
2.4 GHz WiFi MIMO + 5GHz WiFi MIMO + Bluetooth			On	On	On	
			On	On		On

### 3. Directional Gain Calculation

According to KDB 662911 D01 Multiple Transmitter Output v02r01 F) 2) f) (ii)

Directional gain =

$$\bullet \quad \text{DirectionalGain} = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Ant Gain (dBi)		N <sub>ANT</sub> / N <sub>ss</sub>	Directional Gain (dBi)
Ant.1	-2.00		
Ant.2	-8.02	2 / 2	-1.49

## **2. TEST METHODOLOGY**

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

### **EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### **EUT EXERCISE**

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### **GENERAL TEST PROCEDURES**

#### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

#### **Radiated Emissions**

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

### **DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.



### **3. INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

### **4. FACILITIES AND ACCREDITATIONS**

#### **FACILITIES**

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of ANSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

#### **EQUIPMENT**

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5. ANTENNA REQUIREMENTS**

**According to FCC 47 CFR §15.203:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of §15.203

**6. MEASUREMENT UNCERTAINTY**

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (±dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

## 7. DESCRIPTION OF TESTS

### 7.1. Duty Cycle

#### Test Configuration

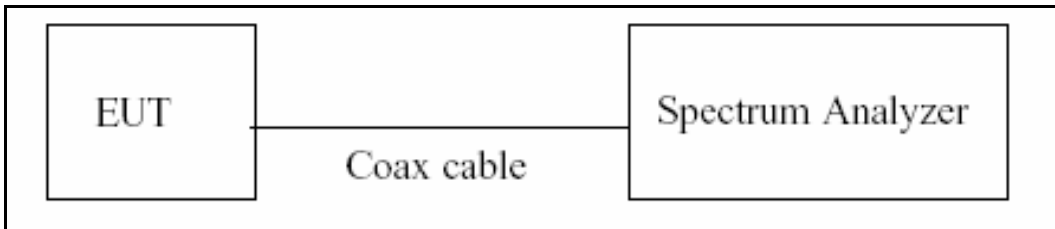

#### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if  $T \leq 6.25$  microseconds. ( $50/6.25 = 8$ )

The zero-span method was used because all measured  $T$  data are  $> 6.25$  microseconds and both RBW and VBW are  $> 50/T$ .


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz ( $\geq$  RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep  $> 100$
6. Trace mode = Clear write
7. Measure  $T_{total}$  and  $T_{on}$
8. Calculate Duty Cycle =  $T_{on}/T_{total}$  and Duty Cycle Factor =  $10\log(1/Duty\ Cycle)$

## 7.2. 6dB Bandwidth

### Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

### Test Configuration

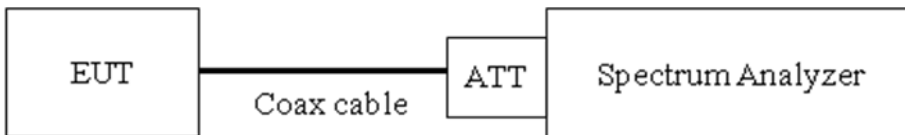

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

### 7.3. Output Power

#### Limit

The maximum permissible conducted output power is 1 Watt.

#### Test Configuration

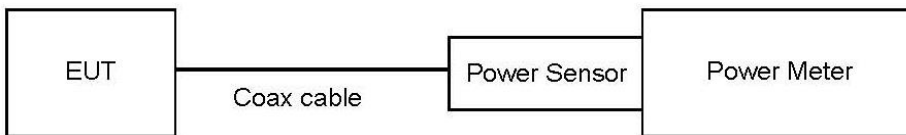

#### Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)  
: Measure the peak power of the transmitter.
  
- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
  - 1) Measure the duty cycle.
  - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
  - 3) Add  $10 \log(1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

#### Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

## 7.4. Power Spectral Density

### Limit

The transmitter power density average over 1-second interval shall not be greater than 8 dBm in any 3kHz BW.

### Test Configuration

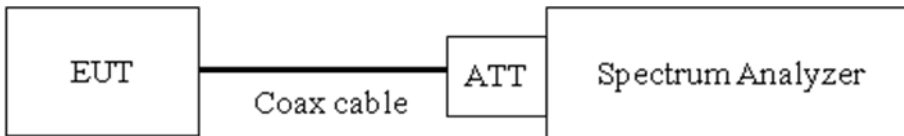

### Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Set span to at least 1.5 times the OBW.
- 3)  $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ .
- 4)  $VBW \geq 3 \times RBW$ .
- 5) Sweep = auto couple
- 6) Detector = power averaging (rms) or sample detector (when rms not available).
- 7) Ensure that the number of measurement points in the sweep  $\geq [2 \times \text{span} / RBW]$ .
- 8) Employ trace averaging (rms) mode over a minimum of 100 traces
- 9) Use the peak marker function to determine the maximum amplitude level.
- 10) Use the peak marker function to determine the maximum amplitude level within the RBW.  
If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11) if then duty factor shall be added to adjust the result if the duty cycle is less than 98%

### Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


## 7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

### Limit

The maximum conducted (Average) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

[ Conducted > 30 dBc ]

### Test Configuration



### Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW  $\geq 3 \times$  RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points  $\geq 2 \times$  Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

**Factors for frequency**

Freq(MHz)	Factor(dB)
30	20.07
100	20.10
200	20.15
300	20.20
400	20.23
500	20.24
600	20.24
700	20.26
800	20.27
900	20.29
1000	20.30
2000	20.44
2400	20.48
2500	20.50
3000	20.55
4000	20.63
5000	20.74
6000	20.76
7000	20.83
8000	20.88
9000	20.94
10000	21.00
11000	21.05
12000	21.13
13000	21.22
14000	21.19
15000	21.24
16000	21.25
17000	21.28
18000	21.33
19000	21.35
20000	21.39
21000	21.51
22000	21.58
23000	21.58
24000	21.62
25000	21.71
26000	21.72

Note : 1. 2 400 ~ 2 500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(20dB) + EUT Cable loss




**7.6. Radiated Test**

**Limit**


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**Test Configuration**


Below 30 MHz

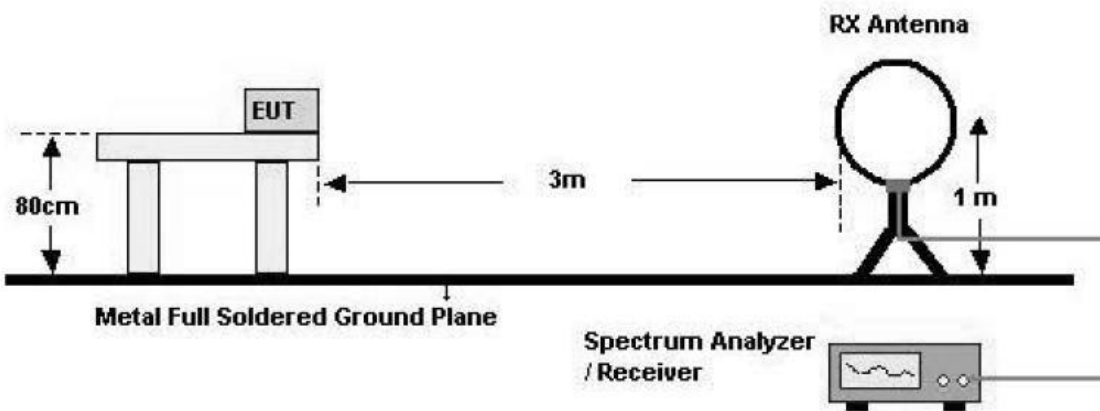

30 MHz - 1 GHz

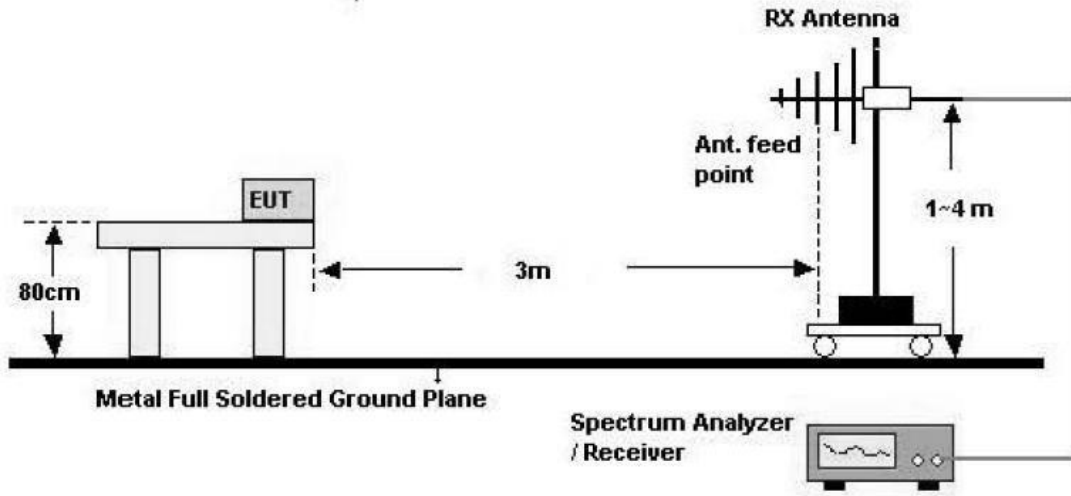

Above 1 GHz

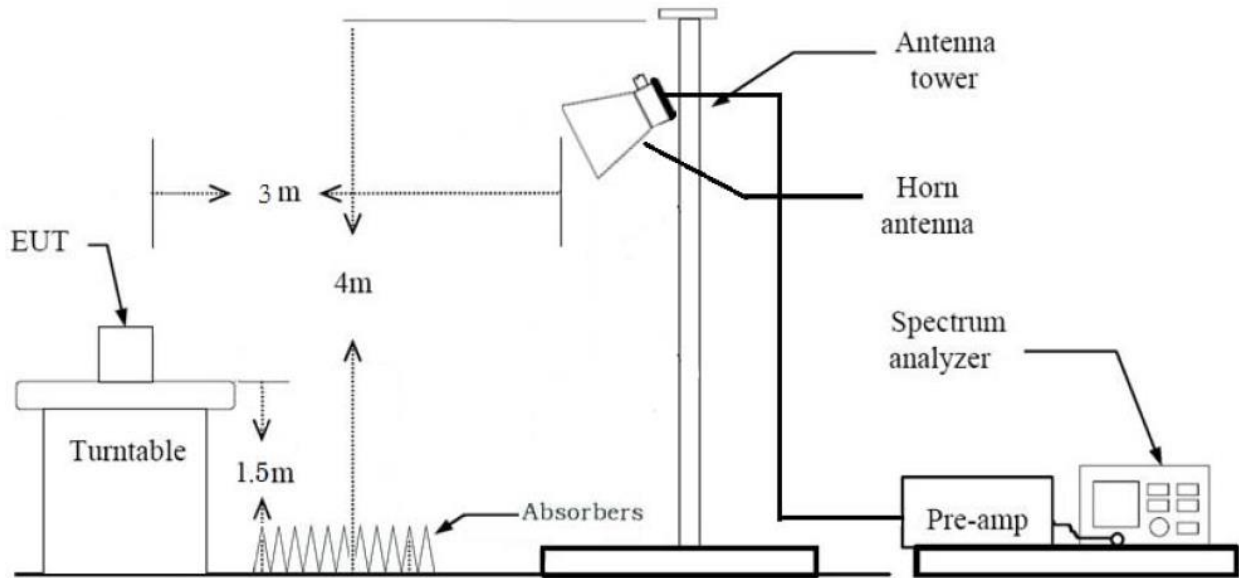

**Test Procedure of Radiated spurious emissions(Below 30 MHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor(0.009 MHz – 0.490 MHz) =  $40\log(3\text{ m}/300\text{ m}) = - 80\text{ dB}$   
Measurement Distance : 3 m
7. Distance Correction Factor(0.490 MHz – 30 MHz) =  $40\log(3\text{ m}/30\text{ m}) = - 40\text{ dB}$   
Measurement Distance : 3 m
8. Spectrum Setting
  - Frequency Range = 9 kHz ~ 30 MHz
  - Detector = Peak
  - Trace = Maxhold
  - RBW = 9 kHz
  - VBW  $\geq 3 \times$  RBW
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**KDB 414788 OFS and Chamber Correlation Justification**

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

**Test Procedure of Radiated spurious emissions(Below 1GHz)**

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※ In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

**Test Procedure of Radiated spurious emissions (Above 1 GHz)**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak

- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW

(2) Measurement Type(Average): Duty cycle  $\geq 98\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle  $< 98\%$ , duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq 3 \times$  RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log$  (test distance / specific distance) (dB)

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle  $\geq 98\%$ )

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle  $< 98\%$ )

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)} \\ + \text{Duty Cycle Factor}$$

**Test Procedure of Radiated Restricted Band Edge**

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW

(2) Measurement Type(Average): Duty cycle  $\geq$  98%,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle < 98%, duty cycle variations are less than  $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW  $\geq$  3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.

- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor =  $20\log(\text{test distance} / \text{specific distance})$  (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle  $\geq$  98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)

+ Duty Cycle Factor

**7.7. AC Power line Conducted Emissions**

**Limit**

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 <sup>(a)</sup>	56 to 46 <sup>(a)</sup>
0.50 to 5	56	46
5 to 30	60	50

<sup>(a)</sup>Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

**Test Configuration**

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

**Test Procedure**

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

**Sample Calculation**

Quasi-peak(Final Result) = Reading Value + Correction Factor



**7.8. Test RU offset for Tones**

BW (MHz)	Tones (T)	RU offset	Test RU offset		
			Low	Mid	High
20	26	0~8	0	4	8
	52	37~40	37	38	40
	106	53~54	53	-	54
	242	61	-	61	-

**7.9. Worst case configuration and mode**

**Conducted test**

1. All data rate of operation were investigated and the worst case results are reported.

(Worst case : MCS4)

2. Bandedge (Conducted)

: All Mode(Channel, Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Tone	Channel	RU Index
26	1	0
	11	8
52	1	37
	11	40
106	1	53
	11	54
242	1, 11	61

Tone	Channel	RU Index
26	12, 13	8
52	12, 13	40
106	12, 13	54
242	12, 13	61

3. SM-G781W, SM-G781U, SM-G781U1/DS were tested and the worst case results are reported.

(Worst case : SM-G781U)

**Radiated test**

1. Full RU(Resource Unit) mode and SU(Single Unit) mode have no difference in physical waveform.  
This Report has been described only Full RU(Resource Unit) mode with worst output power
2. All modes of operation were investigated and the worst case configuration results are reported.
  - Mode : Stand alone, Stand alone + External accessories(Earphone, etc)
  - Worstcase : Stand alone
3. EUT Axis
  - Radiated Spurious Emissions : Y
  - Radiated Restricted Band Edge : X
4. All data rate of operation were investigated and the worst case results are reported.  
(Worst case : MCS0)
5. All Antenna of operation were investigated and the worst case results are reported
  - Mode : Ant1(SISO), Ant2(SISO), Ant1+Ant2(SDM), Ant1+Ant2(CDD)
  - Worstcase : Ant1+Ant2(CDD)
6. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
  - Position : Horizontal, Vertical, Parallel to the ground plane
7. All mode(Tone, RU Offset) of operation were investigated and the worst case configuration results are reported

Test	Tone	RU Offset
RSE	Worst case : 242 T	61
	Additional Tone : 26, 52, 106 T	26 T : ch 1 (RU 4), ch 6 (RU 8), ch 11 (RU 4) 52 T : ch 1 (RU 38), ch 6 (RU 40), ch 11 (RU 38) 106 T : ch 1 (RU 54), ch 6 (RU 54), ch 11 (RU 53)
Bandedge	Worst case : 26T	Low Edge: 0 High Edge: 8
	Additional Tone : 52, 106, 242 T	Low Edge: 37, 53, 61 High Edge: 40, 54, 61

8. SM-G781W, SM-G781U, SM-G781U1/DS were tested and the worst case results are reported.  
(Worst case : SM-G781U)

**Radiated test(DBS)**

1. Please refer to the SM-G781U [DTS] Test Report.
2. SM-G781W, SM-G781U, SM-G781U1/DS were tested and the worst case results are reported.  
(Worst case : SM-G781U)

**AC Power line Conducted Emissions**

1. Please refer to the SM-G781U [UNII] Test Report.
2. SM-G781W, SM-G781U, SM-G781U1/DS were tested and the worst case results are reported.  
(Worst case : SM-G781U)

**8. SUMMARY TEST OF RESULTS**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§15.247(a)(2)	> 500 kHz	Conducted	PASS
Conducted Maximum Output Power	§15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§15.247(e)	< 8 dBm / 3 kHz Band		PASS
Band Edge (Out of Band Emissions)	§15.247(d)	Conducted > 30 dBc		PASS
AC Power line Conducted Emissions	§15.207	cf. Section 7.7		PASS (Note1)
Radiated Spurious Emissions	§15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS
Radiated Restricted Band Edge	§15.247(d), 15.205, 15.209	cf. Section 7.6		PASS

**Note:**

1. Please refer to the SM-G781U [DTS] Test Report.

## 9. TEST RESULT

### 9.1 DUTY CYCLE


Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	26	MCS0	5.084	5.103	0.996	0.02
		MCS1	5.073	5.092	0.996	0.02
		MCS2	5.058	5.077	0.996	0.02
		MCS3	5.207	5.226	0.996	0.02
		MCS4	5.153	5.172	0.996	0.02
		MCS5	5.124	5.143	0.996	0.02
		MCS6	5.122	5.138	0.997	0.01
		MCS7	5.111	5.130	0.996	0.02
		MCS8	5.149	5.168	0.996	0.02
		MCS9	5.109	5.124	0.997	0.01
	52	MCS0	5.075	5.094	0.996	0.02
		MCS1	5.058	5.077	0.996	0.02
		MCS2	5.058	5.073	0.997	0.01
		MCS3	5.206	5.225	0.996	0.02
		MCS4	5.153	5.172	0.996	0.02
		MCS5	5.121	5.140	0.996	0.02
		MCS6	5.115	5.134	0.996	0.02
		MCS7	5.107	5.126	0.996	0.02
		MCS8	5.153	5.172	0.996	0.02
		MCS9	5.106	5.124	0.996	0.02
	106	MCS0	4.765	4.784	0.996	0.02
		MCS1	4.758	4.777	0.996	0.02
		MCS2	4.758	4.773	0.997	0.01
		MCS3	4.902	4.921	0.996	0.02
		MCS4	4.853	4.872	0.996	0.02
		MCS5	4.827	4.845	0.996	0.02
		MCS6	4.818	4.834	0.997	0.01
		MCS7	4.811	4.830	0.996	0.02
		MCS8	4.853	4.868	0.997	0.01
		MCS9	4.802	4.821	0.996	0.02

Mode	Tone (T)	Data Rate	On Time (ms)	Total Time (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11ax (HE20)	242	MCS0	4.746	4.765	0.996	0.02
		MCS1	4.663	4.682	0.996	0.02
		MCS2	4.658	4.677	0.996	0.02
		MCS3	4.803	4.822	0.996	0.02
		MCS4	4.746	4.765	0.996	0.02
		MCS5	4.720	4.739	0.996	0.02
		MCS6	4.710	4.729	0.996	0.02
		MCS7	4.704	4.720	0.997	0.01
		MCS8	4.739	4.758	0.996	0.02
		MCS9	4.697	4.712	0.997	0.01
802.11ax(SU)	BW 20	MCS0	4.667	4.686	0.996	0.02
		MCS1	4.661	4.680	0.996	0.02
		MCS2	4.659	4.674	0.997	0.01
		MCS3	4.802	4.821	0.996	0.02
		MCS4	4.750	4.766	0.997	0.01
		MCS5	4.720	4.735	0.997	0.01
		MCS6	4.712	4.727	0.997	0.01
		MCS7	4.704	4.720	0.997	0.01
		MCS8	4.738	4.756	0.996	0.02
		MCS9	4.695	4.713	0.996	0.02

☐ Test Plots

**Note:**

In order to simplify the report, attached plots were only the most lowest datarate.

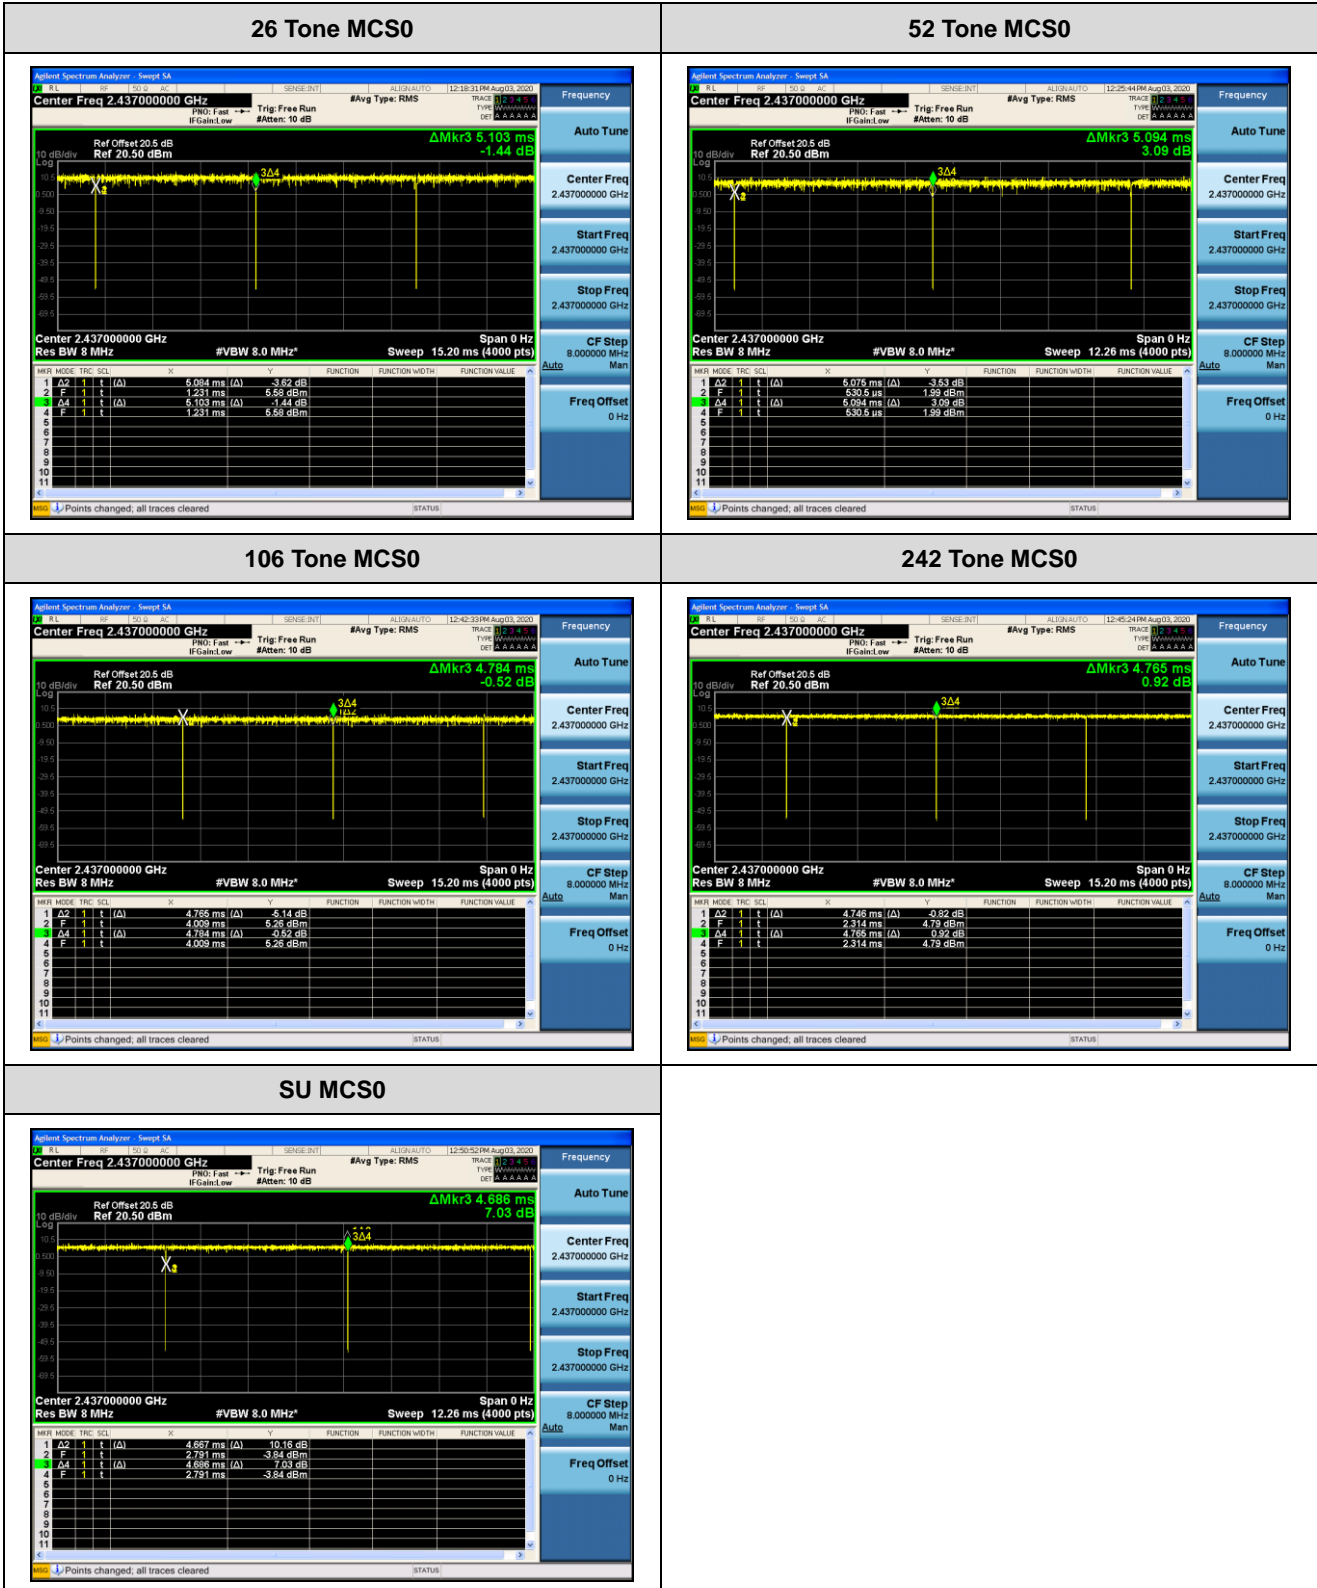



**9.2 6dB BANDWIDTH**

[ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	6dB BW (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	2.145	17.11	18.12	-	-
			Mid	2.698	15.12	-	19.09	19.10
			High	2.149	17.08	17.17	-	-
	2437	6	Low	10.84	17.12	18.14	-	-
			Mid	2.698	15.13	-	19.09	19.08
			High	2.133	17.08	18.14	-	-
	2462	11	Low	2.119	17.11	17.17	-	-
			Mid	2.692	15.10	-	19.02	19.03
			High	15.80	17.08	17.13	-	-
	2467	12	Low	2.141	17.06	17.14	-	-
			Mid	2.690	12.58	-	19.00	18.97
			High	17.08	17.11	18.35	-	-
	2472	13	Low	2.149	17.09	17.17	-	-
			Mid	8.893	15.13	-	19.10	19.10
			High	17.03	17.11	18.38	-	-

# Limit : > 500kHz

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	6dB BW (MHz)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	14.55	17.11	18.11	-	-
			Mid	2.691	15.11	-	19.08	19.08
			High	2.146	17.08	17.16	-	-
	2437	6	Low	2.146	17.12	18.13	-	-
			Mid	2.698	15.14	-	19.11	19.10
			High	2.126	17.09	18.13	-	-
	2462	11	Low	2.121	17.11	17.17	-	-
			Mid	2.690	15.09	-	19.09	19.08
			High	15.78	17.11	17.14	-	-
	2467	12	Low	2.146	14.59	17.13	-	-
			Mid	2.687	11.34	-	18.67	18.85
			High	17.07	17.10	18.34	-	-
	2472	13	Low	2.147	13.32	17.14	-	-
			Mid	8.866	12.58	-	18.46	18.45
			High	17.08	17.11	18.36	-	-


# Limit : > 500kHz

**Test Plots**


**Note:**

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

[ANT1]

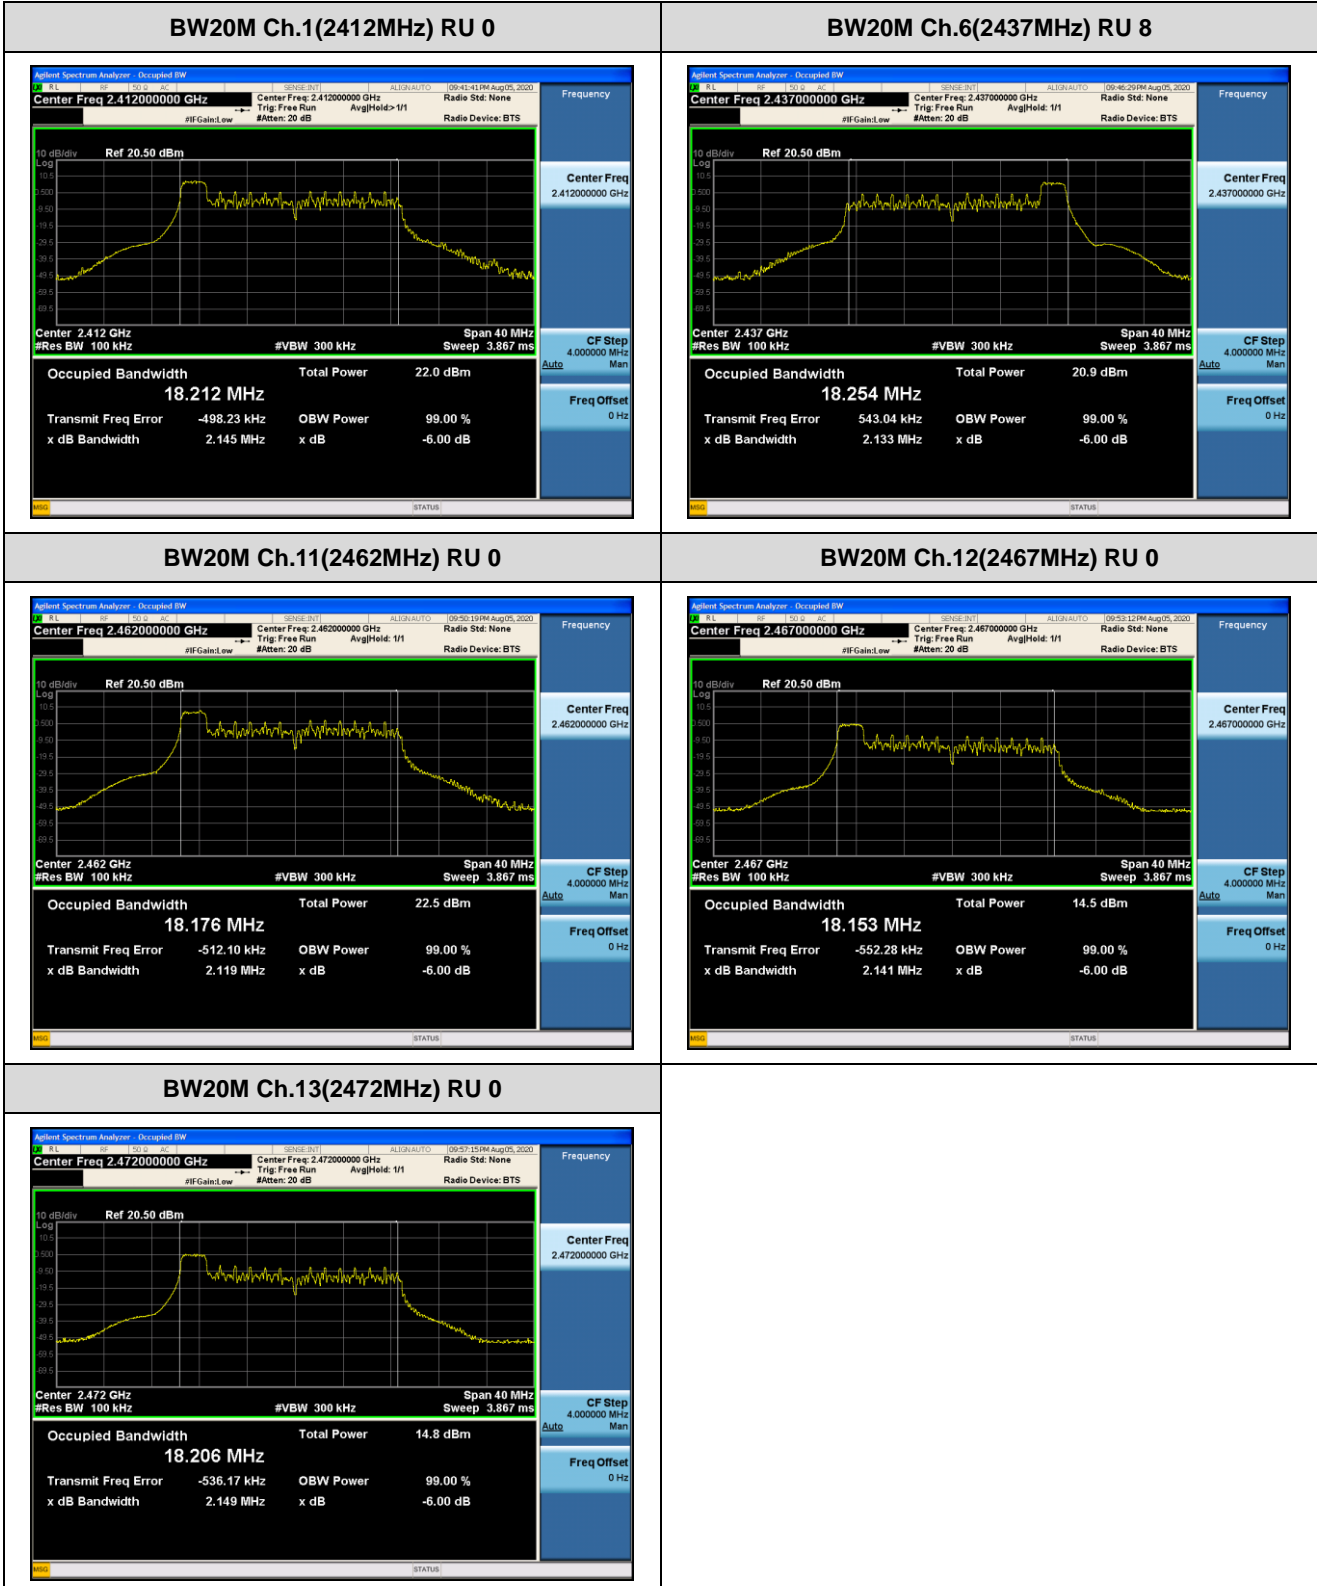

[ANT2]

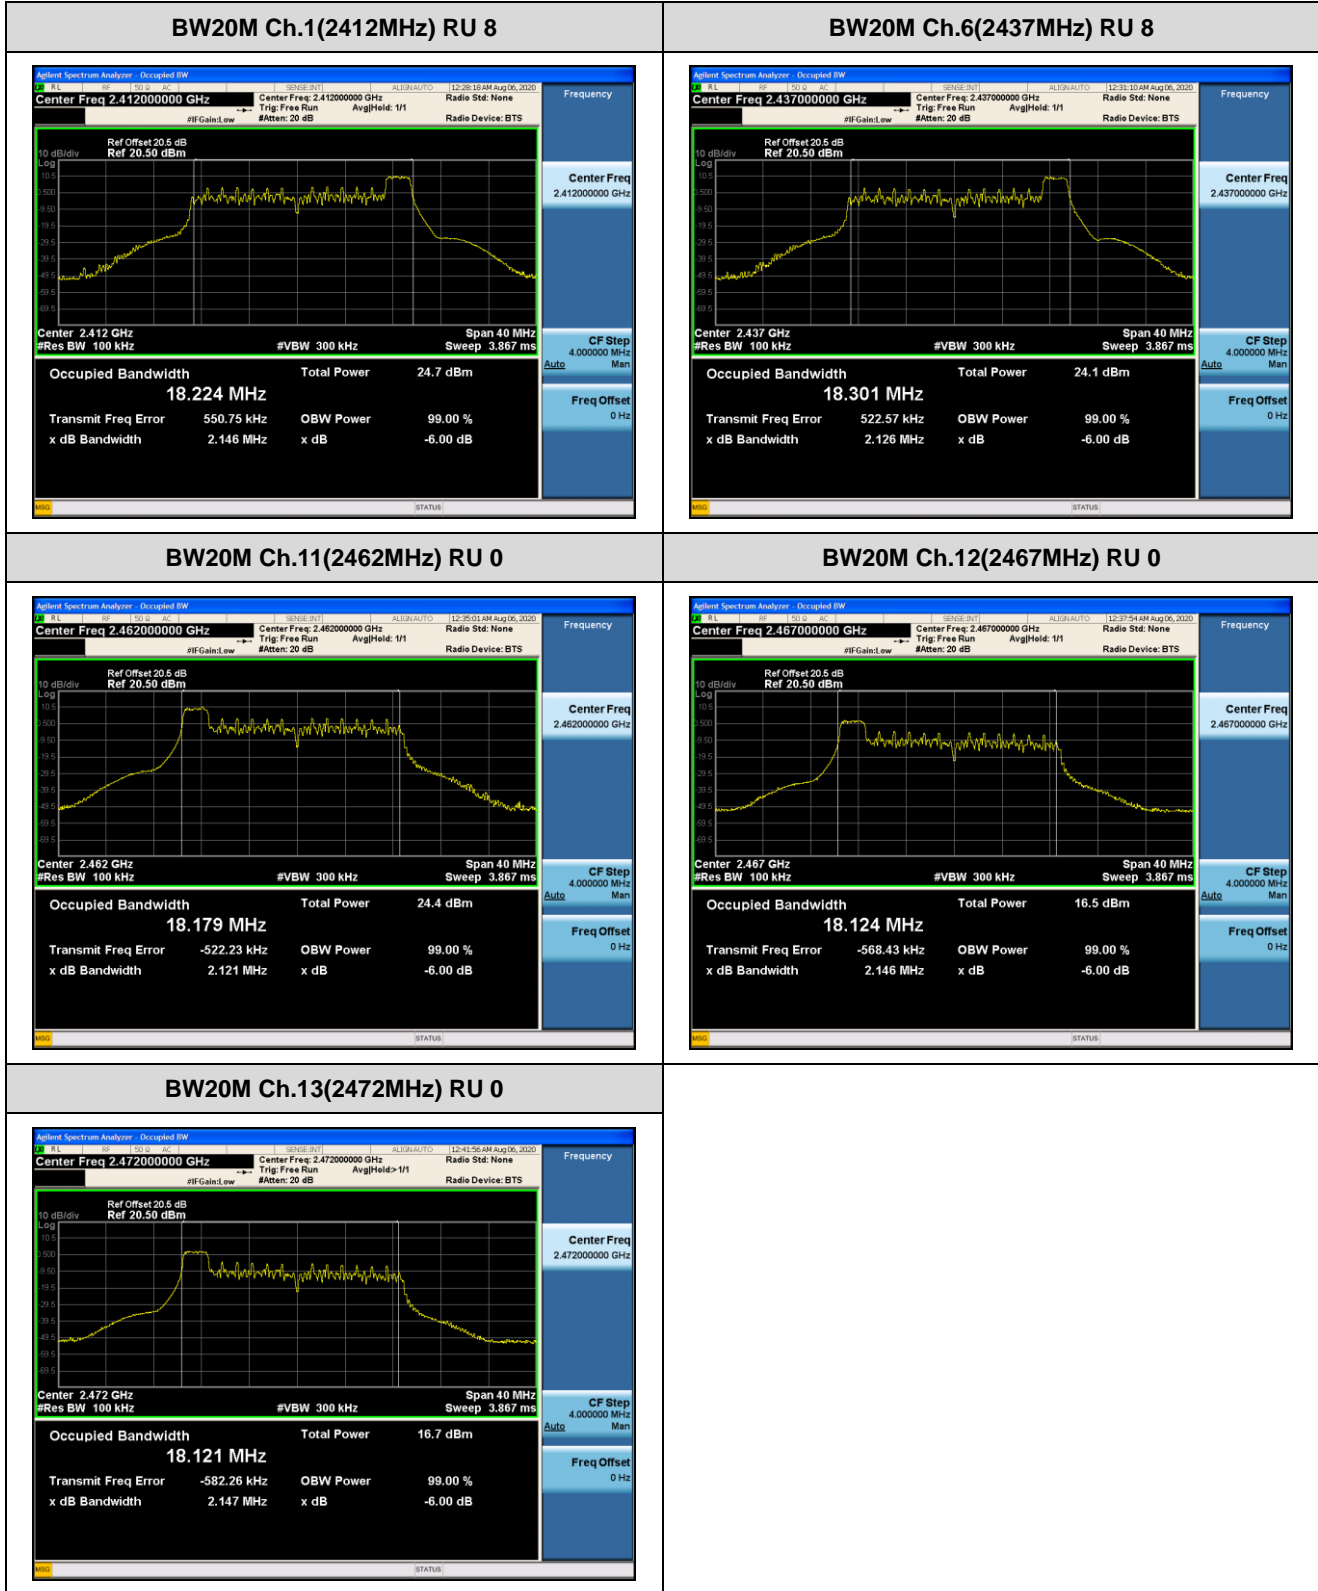

### 9.3 OUTPUT POWER

#### Power Level Setting

802.11ax Mode	Frequency [MHz]	Channel No.	26 T	52T	106T	242 T	SU
Low	2412	1	14	15	15.5	16	16
Mid	2437	6	14	15	15.5	16	16
	2442	7	14	15	15.5	16	16
High	2462	11	14	15	15.5	16	16
	2467	12	5	5	5	5	5
	2472	13	4	4	5	5	5

#### Peak Power

1. Power Meter offset = Attenuator loss + Cable loss
  2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 20.50 dB is offset for 2.4 GHz Band

#### [ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	Total Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	21.06	22.14	22.49	-	-
			Mid	21.06	22.34	-	22.26	21.99
			High	21.11	22.30	22.47	-	-
	2437	6	Low	19.93	20.83	21.04	-	-
			Mid	19.89	20.87	-	20.95	20.76
			High	19.98	20.93	21.07	-	-
	2462	11	Low	21.36	22.80	23.22	-	-
			Mid	22.16	23.19	-	23.08	23.01
			High	21.43	22.59	22.97	-	-
	2467	12	Low	13.65	13.70	13.29	-	-
			Mid	13.01	13.39	-	12.01	11.73
			High	12.44	12.41	12.12	-	-
2472	13	Low	13.03	12.93	13.35	-	-	
		Mid	12.19	12.38	-	12.26	12.06	
		High	12.46	12.16	12.73	-	-	

# Limit : 30dBm

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	Total Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	23.33	24.66	24.86	-	-
			Mid	23.72	24.81	-	24.66	24.61
			High	23.63	24.76	24.93	-	-
	2437	6	Low	22.83	23.92	24.19	-	-
			Mid	22.81	23.86	-	23.91	23.90
			High	22.99	24.09	24.15	-	-
	2462	11	Low	23.33	24.60	24.86	-	-
			Mid	23.46	24.72	-	24.58	24.49
			High	23.06	24.18	24.50	-	-
	2467	12	Low	15.65	15.73	15.45	-	-
			Mid	15.14	15.52	-	14.07	13.99
			High	14.04	14.26	14.29	-	-
	2472	13	Low	15.00	14.89	15.50	-	-
			Mid	14.04	14.47	-	13.96	13.95
			High	13.73	13.44	14.06	-	-

# Limit : 30dBm

**[MIMO]**

1. Total peak power for MIMO= $10\text{LOG}((10^{\wedge}(\text{Ant1 Total power /10}))+ (10^{\wedge}(\text{Ant2 Total power /10})))$

BW	Frequency [MHz]	Channel No.	RU Index	Total Peak Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	25.35	26.59	26.85	-	-
			Mid	25.60	26.76	-	26.63	26.50
			High	25.56	26.71	26.88	-	-
	2437	6	Low	24.63	25.66	25.91	-	-
			Mid	24.60	25.62	-	25.69	25.61
			High	24.75	25.81	25.89	-	-
	2462	11	Low	25.47	26.81	27.12	-	-
			Mid	25.87	27.04	-	26.90	26.82
			High	25.33	26.46	26.81	-	-
	2467	12	Low	17.78	17.84	17.52	-	-
			Mid	17.21	17.60	-	16.17	16.01
			High	16.33	16.45	16.35	-	-
	2472	13	Low	17.13	17.03	17.57	-	-
			Mid	16.22	16.56	-	16.20	16.12
			High	16.16	15.85	16.45	-	-

# Limit : 30dBm

**Average Power**

1. Power Meter offset = Attenuator loss + Cable loss
  2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
- So, 20.50 dB is offset for 2.4 GHz Band

**[ANT1]**

BW	Frequency [MHz]	Channel No.	RU Index	Total Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	12.33	13.78	14.32	-	-
			Mid	12.52	13.98	-	15.03	15.02
			High	12.44	13.91	14.37	-	-
	2437	6	Low	11.11	12.28	12.87	-	-
			Mid	11.33	12.60	-	13.77	13.74
			High	11.34	12.62	13.04	-	-
	2462	11	Low	12.62	14.14	14.91	-	-
			Mid	13.48	14.47	-	15.93	15.92
			High	12.53	14.19	14.86	-	-
	2467	12	Low	5.29	5.51	5.38	-	-
			Mid	4.53	5.38	-	4.90	4.81
			High	3.65	3.67	3.83	-	-
	2472	13	Low	4.87	4.83	5.37	-	-
			Mid	3.54	4.17	-	5.09	5.03
			High	3.78	3.79	4.55	-	-

# Limit : 30dBm



[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	Total Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	14.56	15.73	16.42	-	-
			Mid	14.95	15.99	-	17.42	17.40
			High	14.88	15.93	16.51	-	-
	2437	6	Low	14.19	15.32	15.81	-	-
			Mid	14.19	15.35	-	16.72	16.65
			High	14.34	15.46	15.95	-	-
	2462	11	Low	14.62	15.87	16.45	-	-
			Mid	14.89	15.97	-	17.40	17.33
			High	14.25	15.54	16.24	-	-
	2467	12	Low	7.38	7.48	7.43	-	-
			Mid	6.70	7.42	-	6.92	6.85
			High	5.11	5.55	5.94	-	-
	2472	13	Low	6.79	6.83	7.47	-	-
			Mid	5.50	6.36	-	6.82	6.78
			High	4.65	4.73	5.68	-	-

# Limit : 30dBm

**[MIMO]**

1. Total average power for MIMO= $10\text{LOG}((10^{\text{Ant1 Total power /10}})+(10^{\text{Ant2 Total power /10}}))$

BW	Frequency [MHz]	Channel No.	RU Index	Total Average Power (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	16.59	17.87	18.51	-	-
			Mid	16.91	18.11	-	19.40	19.39
			High	16.84	18.05	18.58	-	-
	2437	6	Low	15.93	17.07	17.59	-	-
			Mid	16.00	17.20	-	18.50	18.45
			High	16.11	17.28	17.74	-	-
	2462	11	Low	16.74	18.10	18.76	-	-
			Mid	17.25	18.29	-	19.74	19.69
			High	16.49	17.93	18.61	-	-
	2467	12	Low	9.47	9.62	9.54	-	-
			Mid	8.76	9.53	-	9.04	8.95
			High	7.45	7.72	8.02	-	-
	2472	13	Low	8.95	8.96	9.56	-	-
			Mid	7.64	8.41	-	9.05	9.00
			High	7.24	7.29	8.16	-	-

# Limit : 30dBm

**9.4 POWER SPECTRAL DENSITY**

**Note :**

1. Spectrum reading values are not plot data.  
The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.
2. Spectrum offset = Attenuator loss + Cable loss
3. 20.50 dB is offset for 2.4 GHz Band.
4. Total PSD = Reading Value + Duty Cycle Factor

**[ANT1]**

BW	Frequency [MHz]	Channel No.	RU Index	Total PSD (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-3.849	-5.513	-8.463	-	-
			Mid	-3.419	-5.501	-	-11.108	-10.987
			High	-3.690	-5.621	-8.242	-	-
	2437	6	Low	-5.120	-7.111	-9.703	-	-
			Mid	-4.667	-7.092	-	-12.179	-12.434
			High	-4.947	-7.090	-9.701	-	-
	2462	11	Low	-3.498	-5.354	-7.512	-	-
			Mid	-2.360	-4.733	-	-9.504	-9.599
			High	-3.437	-4.842	-6.937	-	-
	2467	12	Low	-10.567	-14.089	-17.388	-	-
			Mid	-11.881	-14.073	-	-20.338	-20.241
			High	-12.784	-16.091	-18.454	-	-
	2472	13	Low	-10.936	-14.695	-16.881	-	-
			Mid	-12.814	-15.005	-	-20.415	-20.316
			High	-12.207	-15.677	-18.071	-	-

# Limit : 8dBm

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	Total PSD (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	-1.534	-3.660	-6.064	-	-
			Mid	-0.823	-3.209	-	-8.321	-8.668
			High	-1.118	-3.011	-5.855	-	-
	2437	6	Low	-1.729	-3.888	-6.390	-	-
			Mid	-1.931	-3.922	-	-9.318	-9.412
			High	-1.913	-3.377	-6.490	-	-
	2462	11	Low	-0.835	-3.489	-5.920	-	-
			Mid	-1.091	-3.197	-	-8.516	-8.173
			High	-1.732	-3.548	-6.187	-	-
	2467	12	Low	-8.550	-12.051	-15.279	-	-
			Mid	-9.292	-12.272	-	-18.602	-18.484
			High	-10.850	-13.864	-16.091	-	-
	2472	13	Low	-9.488	-12.895	-14.979	-	-
			Mid	-10.769	-12.785	-	-18.347	-18.215
			High	-11.996	-14.959	-16.691	-	-

# Limit : 8dBm

[MIMO]

BW	Frequency [MHz]	Channel No.	RU Index	Total PSD (dBm)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	0.471	-1.478	-4.090	-	-
			Mid	1.080	-1.195	-	-6.484	-6.664
			High	0.794	-1.113	-3.876	-	-
	2437	6	Low	-0.091	-2.197	-4.728	-	-
			Mid	-0.077	-2.214	-	-7.506	-7.655
			High	-0.160	-1.838	-4.795	-	-
	2462	11	Low	1.045	-1.312	-3.633	-	-
			Mid	1.331	-0.887	-	-5.971	-5.817
			High	0.509	-1.137	-3.536	-	-
	2467	12	Low	-6.432	-9.941	-13.196	-	-
			Mid	-7.386	-10.070	-	-16.373	-16.264
			High	-8.700	-11.826	-14.103	-	-
	2472	13	Low	-7.142	-10.692	-12.816	-	-
			Mid	-8.662	-10.744	-	-16.248	-16.129
			High	-9.090	-12.293	-14.316	-	-



# Limit : 8dBm

**Test Plots**


**Note:**

1. In order to simplify the report, attached plots were only the worstcase PSD channel.
2. Total PSD(dBm) = Reading Value + Duty Cycle Factor

[ANT1]

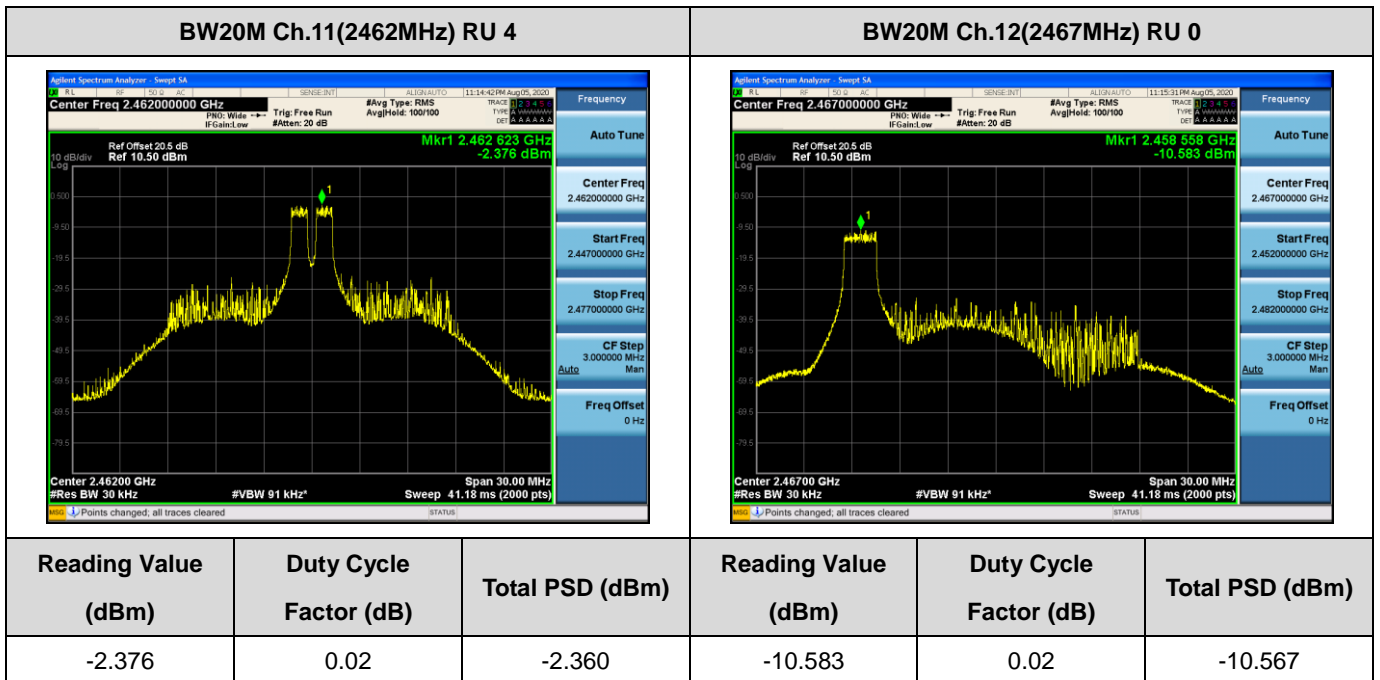
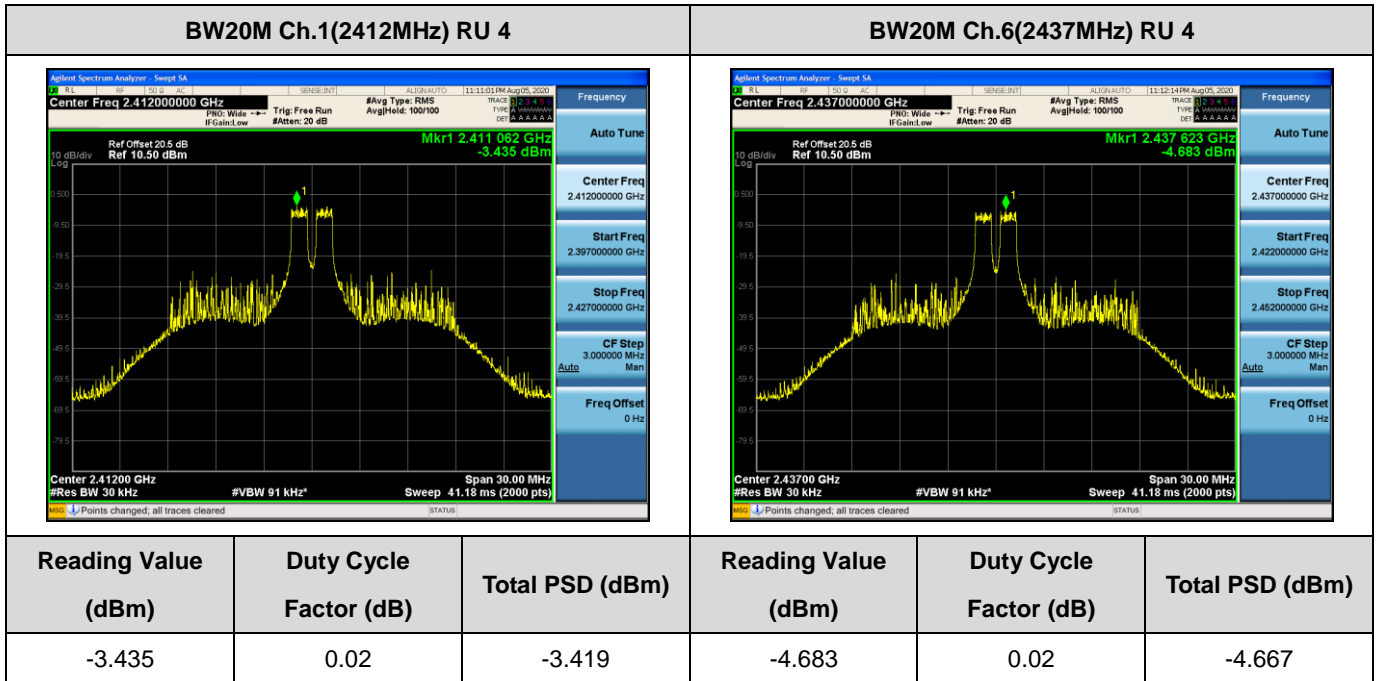


**BW20M Ch.13(2472MHz) RU 0**

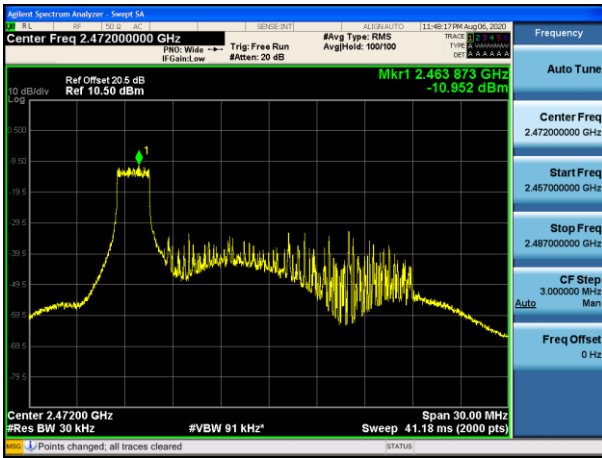


Reading Value (dBm)	Duty Cycle Factor (dB)	Total PSD (dBm)
-10.952	0.02	-10.936

[ANT2]

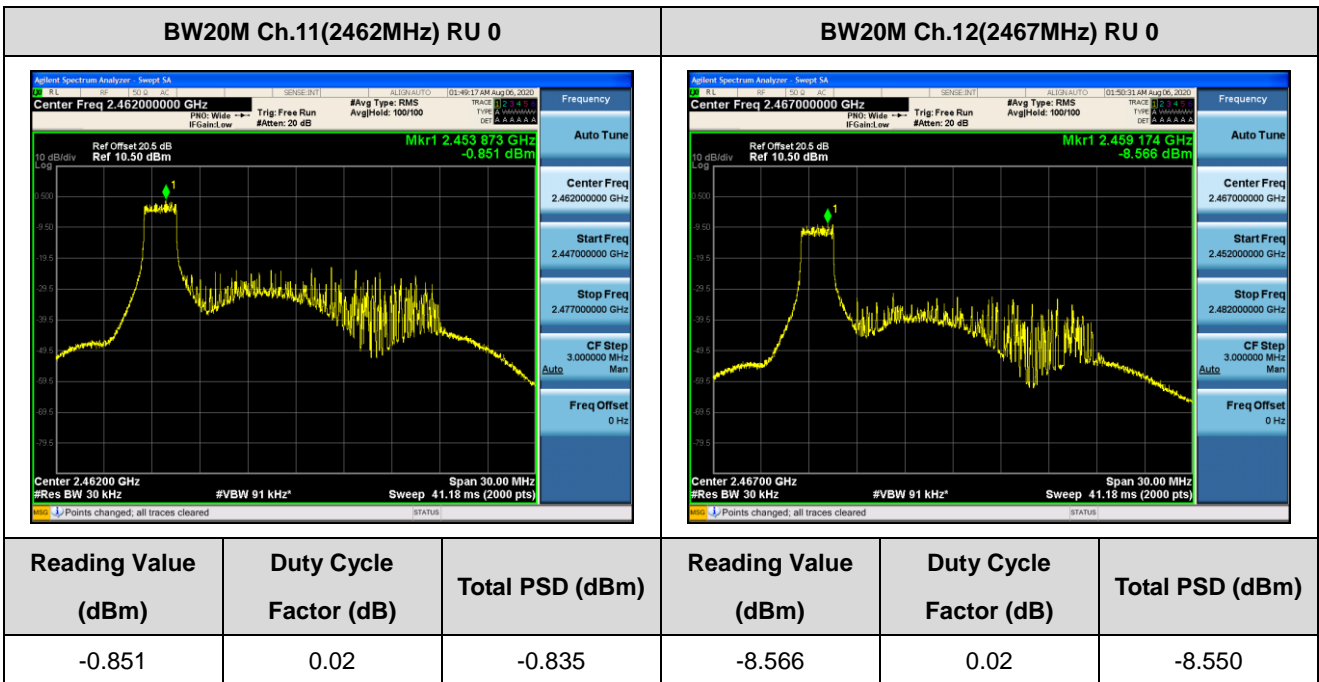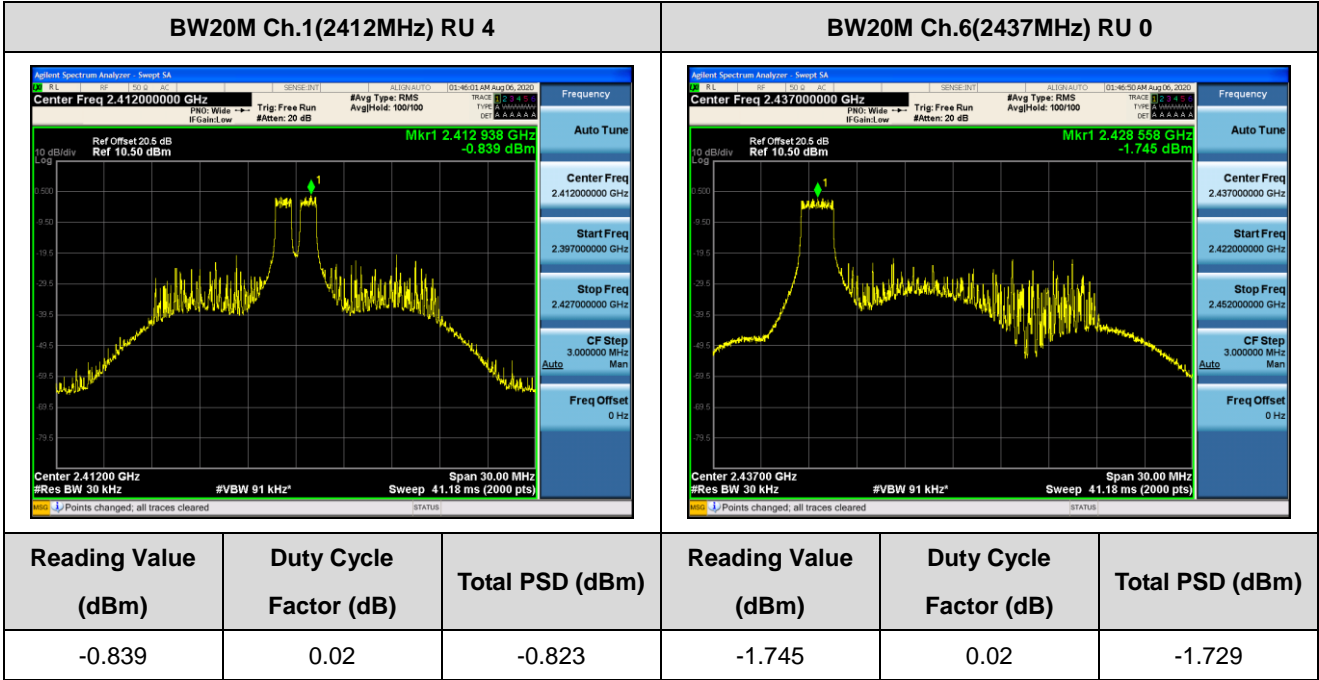



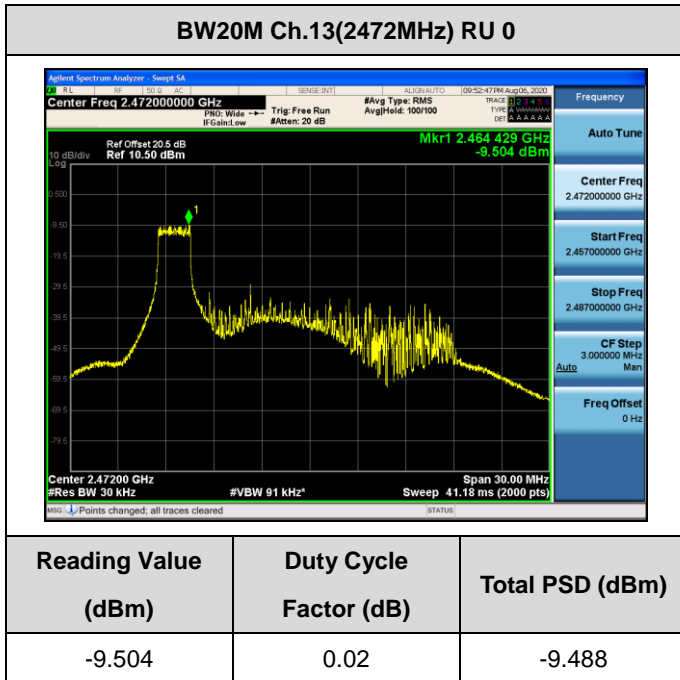

**9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS**

**Band Edge**

[ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	39.694	36.189	32.975
	2462	11	High	Highest Bandedge	58.640	54.778	55.178
	2467	12	High	Highest Bandedge	49.540	44.782	43.826
	2472	13	High	Highest Bandedge	37.782	34.378	31.131

# Limit : 30 dBc

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	33.219	34.423
	2462	11		Highest Bandedge	49.785	49.967
	2467	12		Highest Bandedge	43.794	43.519
	2472	13		Highest Bandedge	33.299	32.562

# Limit : 30 dBc

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)		
					26 T	52 T	106 T
HE20	2412	1	Low	Lowest Bandedge	39.897	36.287	33.050
	2462	11	High	Highest Bandedge	60.445	57.968	56.031
	2467	12	High	Highest Bandedge	50.644	48.823	47.623
	2472	13	High	Highest Bandedge	38.561	34.482	33.251

# Limit : 30 dBc

BW	Frequency [MHz]	Channel No.	RU Index	Measured Position	Result (dB)	
					242 T	SU
HE20	2412	1	Mid	Lowest Bandedge	35.506	33.739
	2462	11		Highest Bandedge	51.888	52.024
	2467	12		Highest Bandedge	46.391	46.354
	2472	13		Highest Bandedge	35.454	35.537


# Limit : 30 dBc

☐ Test Plots


**Note:**

In order to simplify the report, attached plots were only the worst case.

[ANT1]

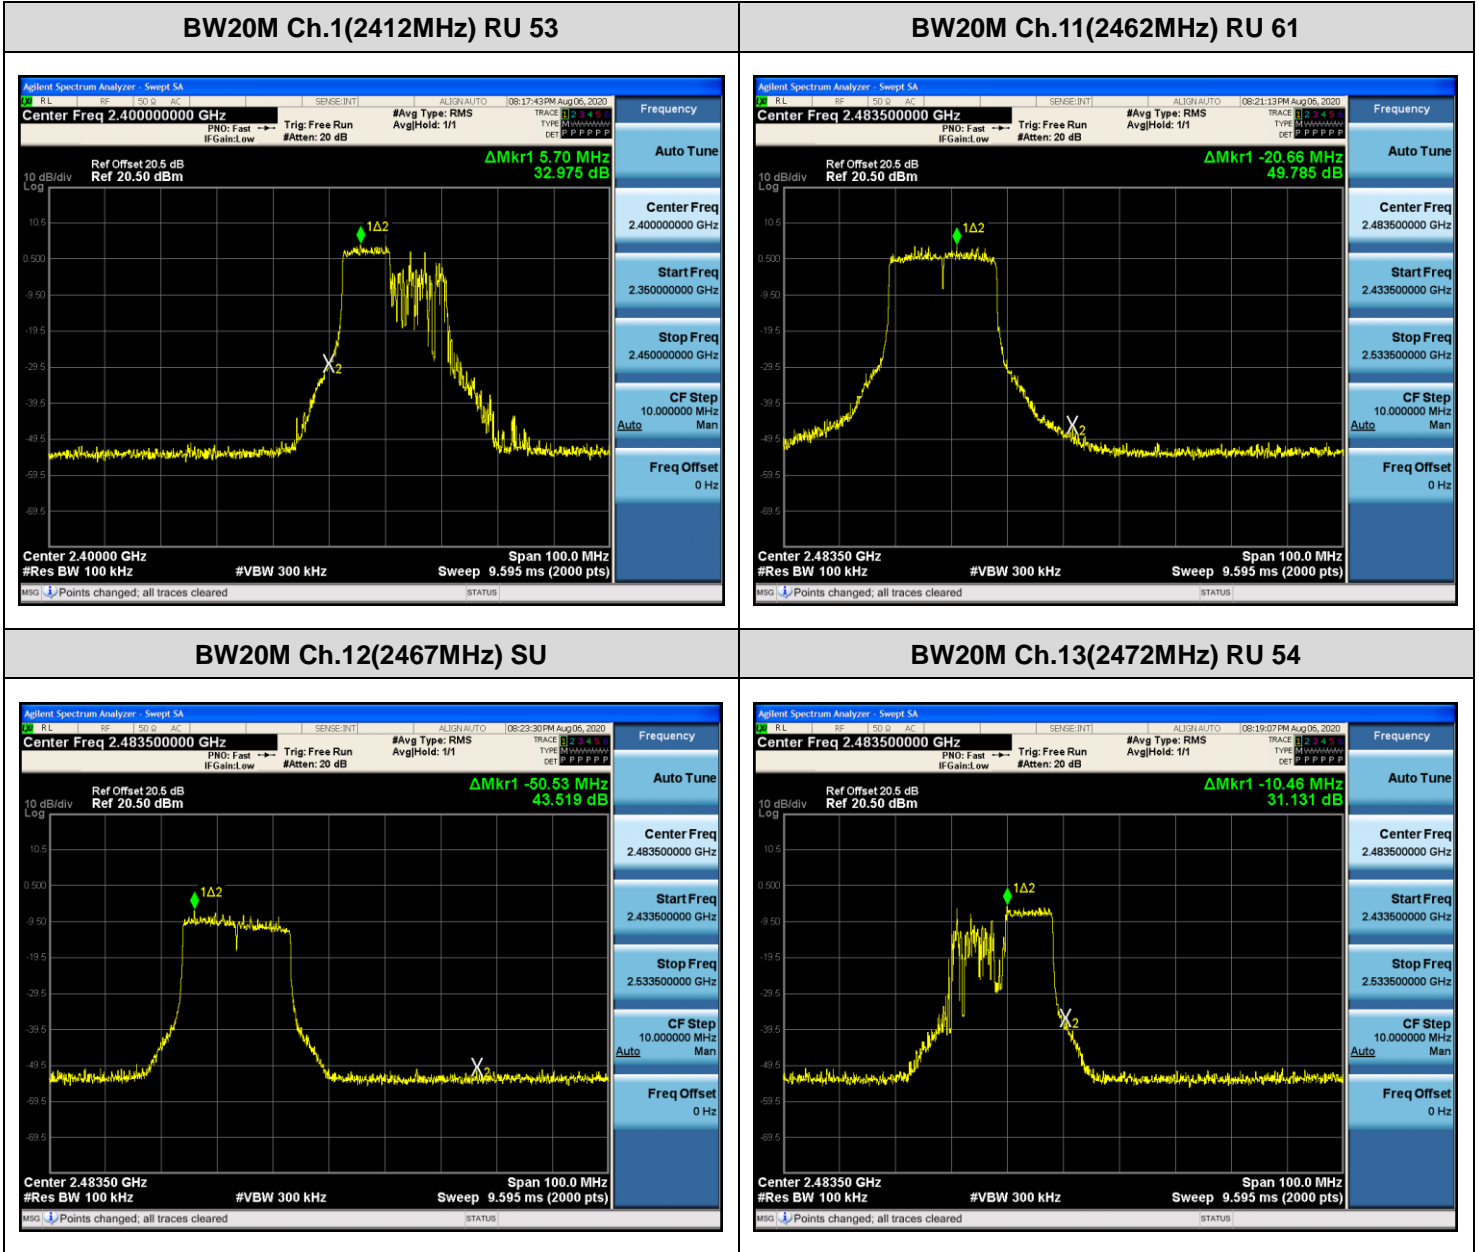

[ANT2]

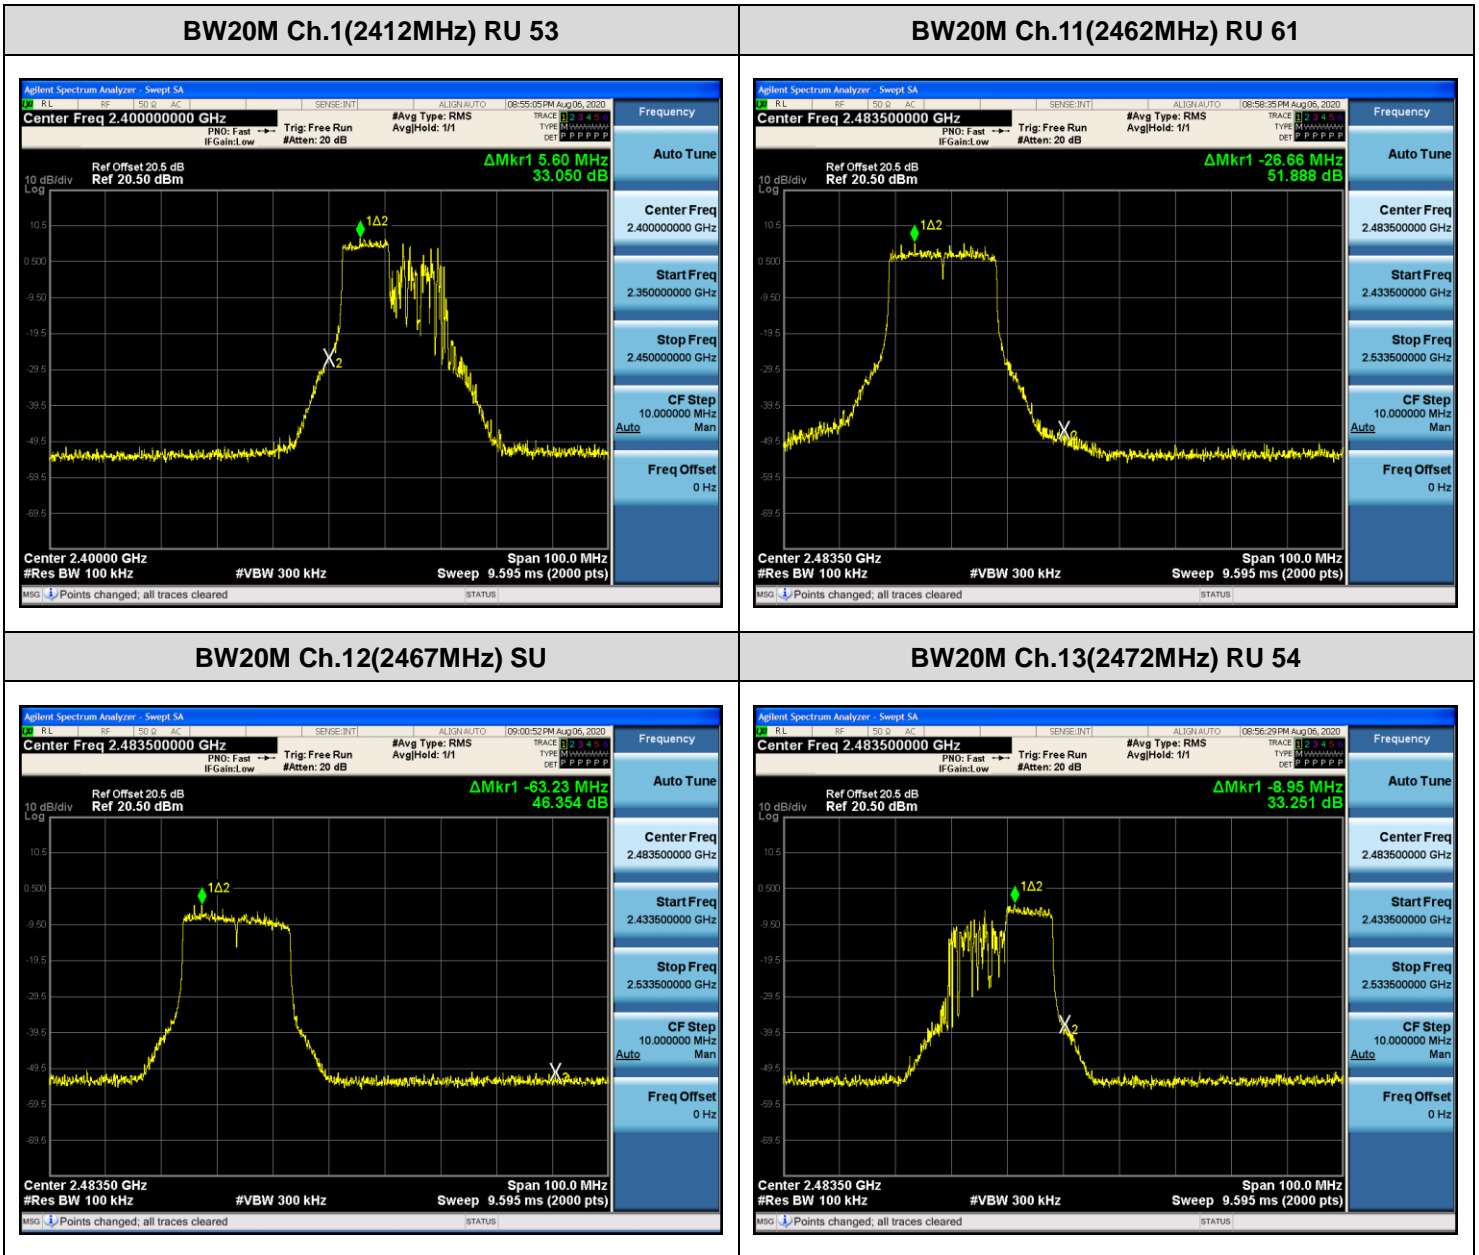

**Conducted Spurious Emissions**

[ANT1]

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	50.106	48.604	46.452	-	-
			Mid	50.489	48.346	-	44.138	46.405
			High	50.834	48.997	46.562	-	-
	2437	6	Low	50.224	47.347	45.015	-	-
			Mid	48.051	47.215	-	43.134	42.690
			High	48.353	47.217	45.762	-	-
	2462	11	Low	49.778	48.939	46.973	-	-
			Mid	50.851	48.864	-	43.727	45.641
			High	50.399	49.509	47.545	-	-
	2467	12	Low	42.680	40.210	37.468	-	-
			Mid	41.417	41.137	-	33.531	33.593
			High	41.240	40.199	35.649	-	-
	2472	13	Low	43.419	38.872	37.272	-	-
			Mid	41.263	39.587	-	34.388	36.357
			High	41.008	38.777	38.203	-	-

# Limit : 30 dBc

[ANT2]

BW	Frequency [MHz]	Channel No.	RU Index	Result (dB)				
				26 T	52 T	106 T	242 T	SU
HE20	2412	1	Low	45.757	45.330	42.431	-	-
			Mid	49.200	46.328	-	41.196	40.453
			High	45.620	46.071	44.512	-	-
	2437	6	Low	48.200	44.849	41.615	-	-
			Mid	47.103	44.617	-	40.378	39.732
			High	46.888	45.989	43.381	-	-
	2462	11	Low	45.682	46.086	43.298	-	-
			Mid	46.806	46.710	-	41.051	40.519
			High	46.128	45.378	43.280	-	-
	2467	12	Low	40.477	38.038	34.409	-	-
			Mid	39.100	36.077	-	31.656	31.097
			High	37.508	34.932	33.193	-	-
	2472	13	Low	45.597	41.279	32.677	-	-
			Mid	44.143	41.418	-	32.473	32.219
			High	43.310	38.580	31.194	-	-


# Limit : 30 dBc

☐ Test Plots

**Note:**


In order to simplify the report, attached plots were only the worst case.

[ANT1]

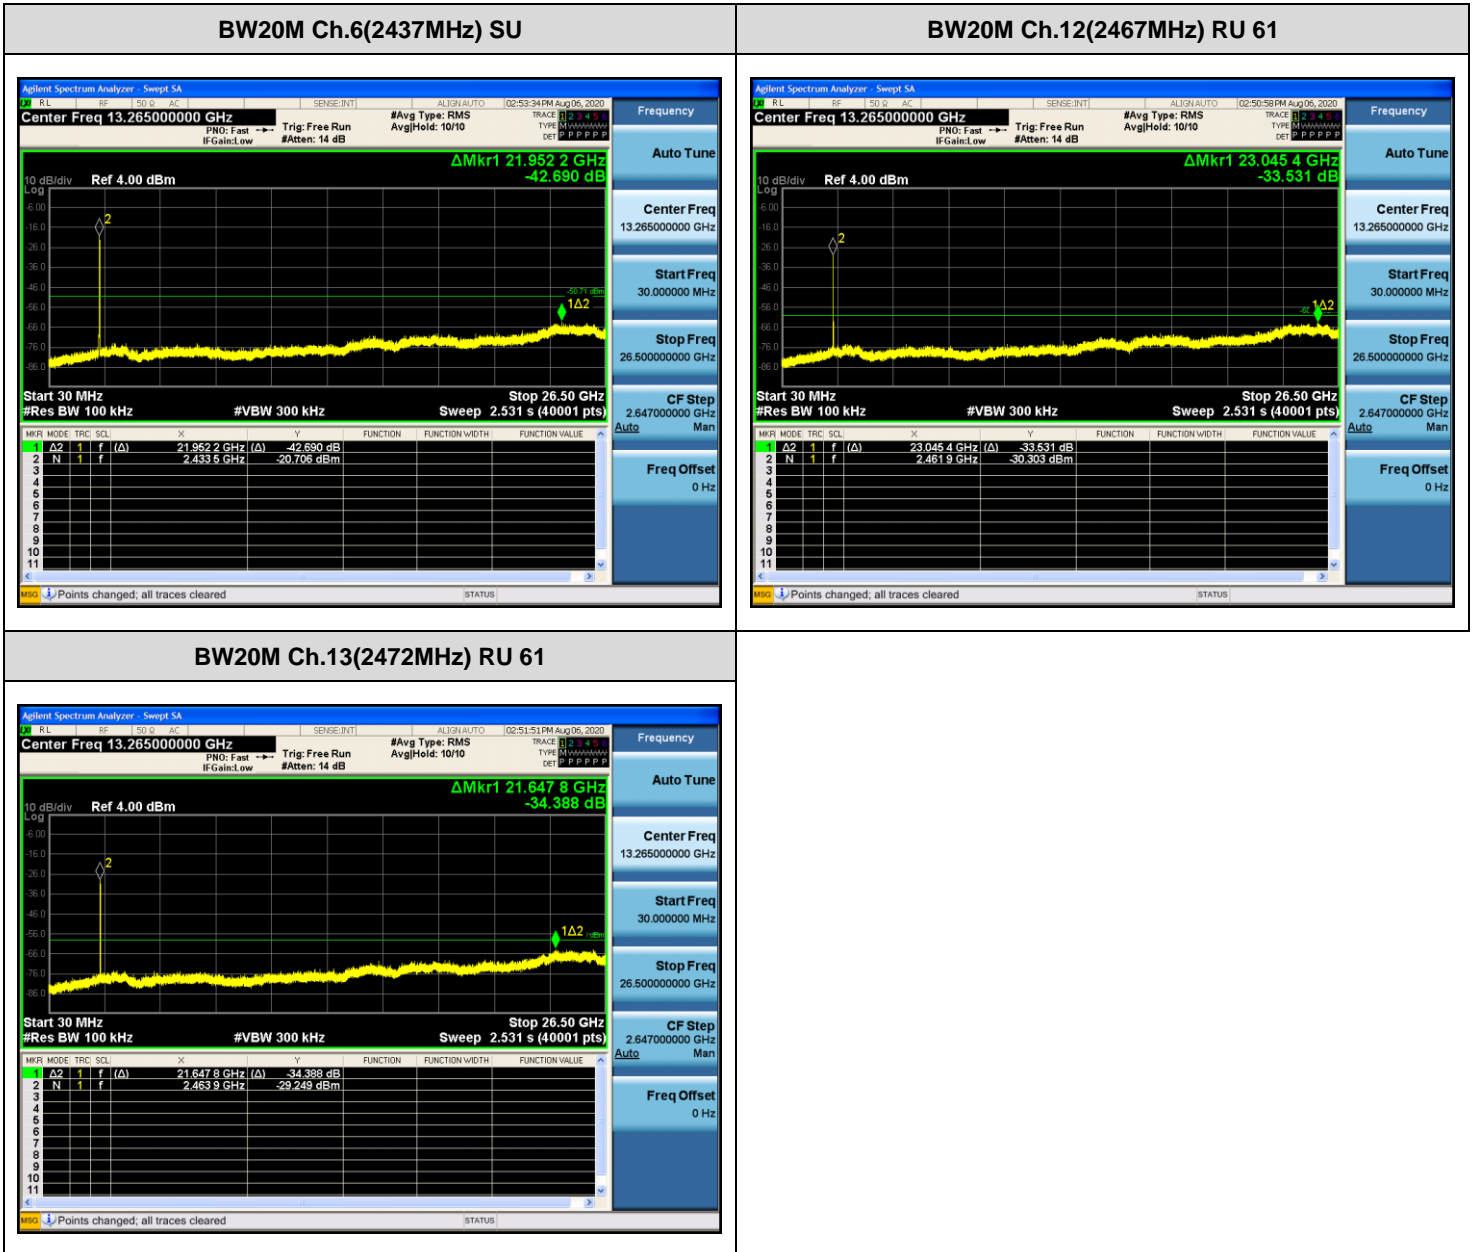



[ANT2]

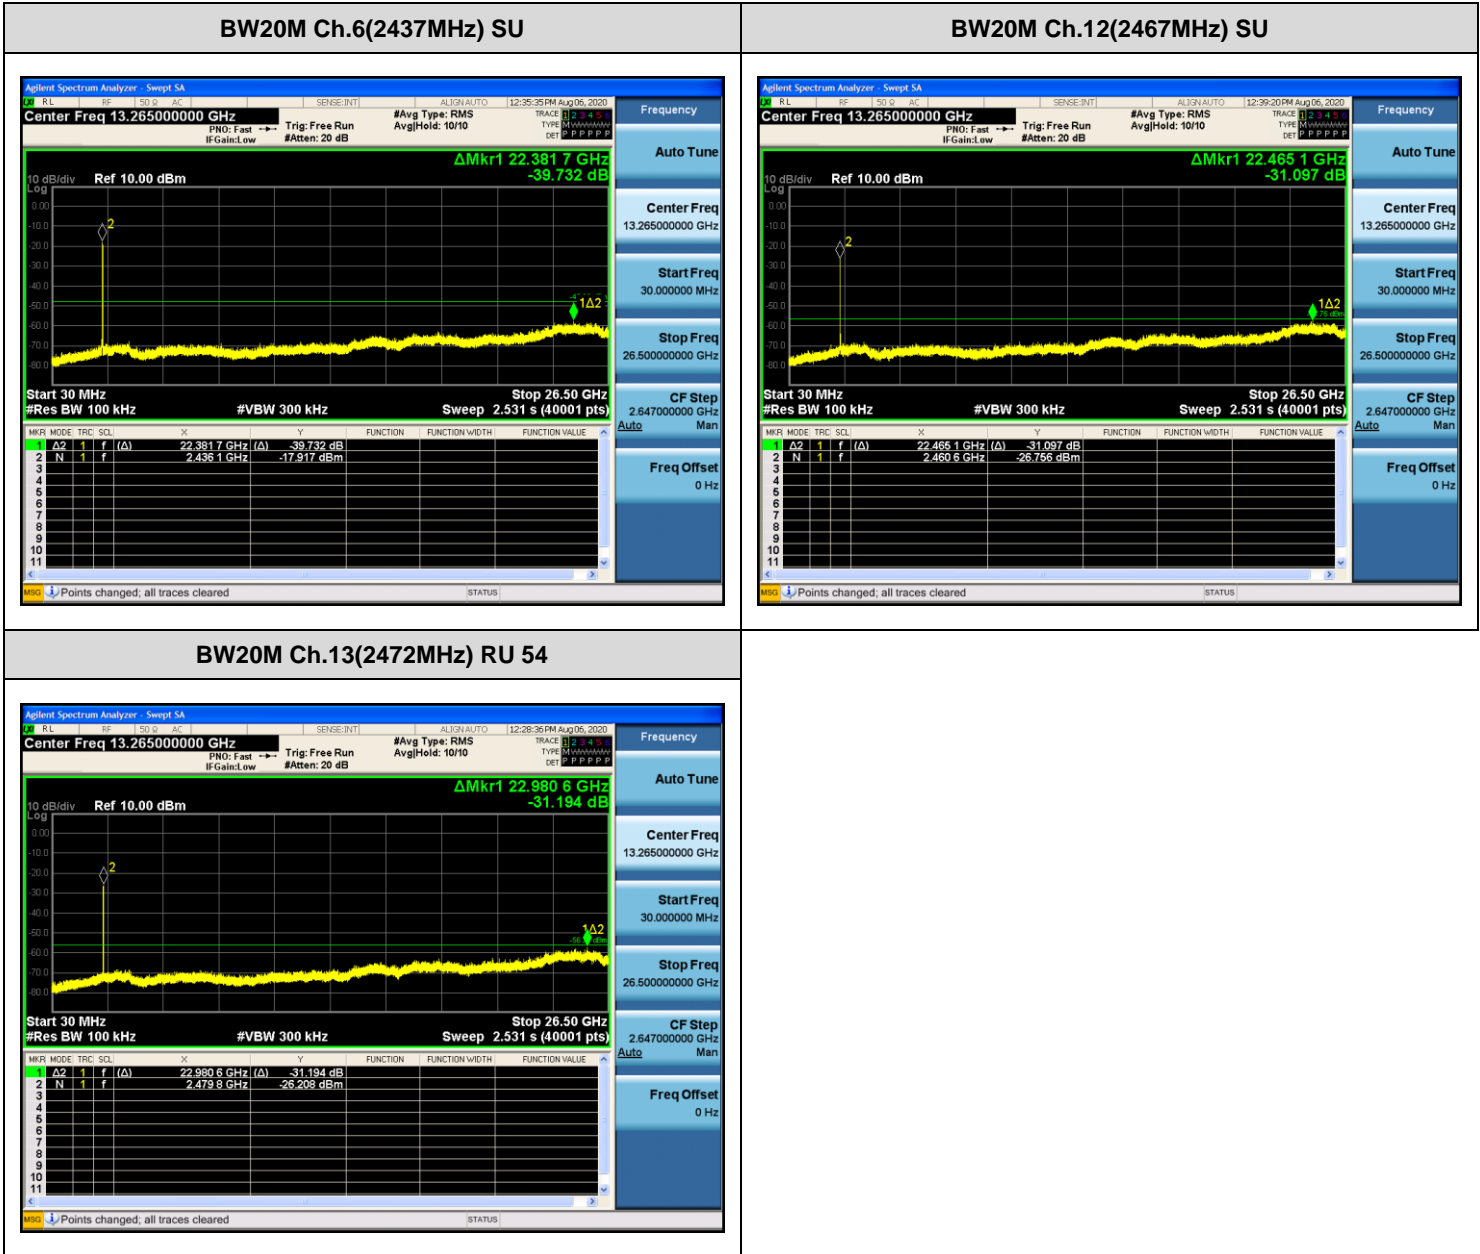

**9.6 RADIATED SPURIOUS EMISSIONS**

**Frequency Range : 9 kHz – 30MHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor =  $40\log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor

**Frequency Range : Below 1 GHz**

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

**Note:**

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

**Frequency Range : Above 1 GHz**

**1. 26 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.44	0.00	1.76	V	44.20	73.98	29.78	PK
4824	31.51	0.00	1.76	V	33.27	53.98	20.71	AV
7236	39.03	0.00	12.28	V	51.31	73.98	22.67	PK
7236	27.23	0.00	12.28	V	39.51	53.98	14.47	AV
4824	43.41	0.00	1.76	H	45.17	73.98	28.81	PK
4824	31.98	0.00	1.76	H	33.74	53.98	20.24	AV
7236	38.18	0.00	12.28	H	50.46	73.98	23.52	PK
7236	27.29	0.00	12.28	H	39.57	53.98	14.41	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	42.99	0.00	1.96	V	44.95	73.98	29.03	PK
4874	30.78	0.00	1.96	V	32.74	53.98	21.24	AV
7311	39.40	0.00	11.45	V	50.85	73.98	23.13	PK
7311	27.62	0.00	11.45	V	39.07	53.98	14.91	AV
4874	42.27	0.00	1.96	H	44.23	73.98	29.75	PK
4874	30.81	0.00	1.96	H	32.77	53.98	21.21	AV
7311	38.39	0.00	11.45	H	49.84	73.98	24.14	PK
7311	27.65	0.00	11.45	H	39.10	53.98	14.88	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	43.11	0.00	2.83	V	45.94	73.98	28.04	PK
4924	30.57	0.00	2.83	V	33.40	53.98	20.58	AV
7386	39.25	0.00	11.87	V	51.12	73.98	22.86	PK
7386	27.25	0.00	11.87	V	39.12	53.98	14.86	AV
4924	43.27	0.00	2.83	H	46.10	73.98	27.88	PK
4924	31.20	0.00	2.83	H	34.03	53.98	19.95	AV
7386	38.63	0.00	11.87	H	50.50	73.98	23.48	PK
7386	27.15	0.00	11.87	H	39.02	53.98	14.96	AV

**Note:**

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

**2. 52 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No. 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.38	0.00	1.76	V	44.14	73.98	29.84	PK
4824	31.19	0.00	1.76	V	32.95	53.98	21.03	AV
7236	39.11	0.00	12.28	V	51.39	73.98	22.59	PK
7236	27.11	0.00	12.28	V	39.39	53.98	14.59	AV
4824	42.74	0.00	1.76	H	44.50	73.98	29.48	PK
4824	31.35	0.00	1.76	H	33.11	53.98	20.87	AV
7236	39.65	0.00	12.28	H	51.93	73.98	22.05	PK
7236	27.25	0.00	12.28	H	39.53	53.98	14.45	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No. 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	42.68	0.00	1.96	V	44.64	73.98	29.34	PK
4874	30.77	0.00	1.96	V	32.73	53.98	21.25	AV
7311	38.24	0.00	11.45	V	49.69	73.98	24.29	PK
7311	27.61	0.00	11.45	V	39.06	53.98	14.92	AV
4874	43.18	0.00	1.96	H	45.14	73.98	28.84	PK
4874	30.89	0.00	1.96	H	32.85	53.98	21.13	AV
7311	38.80	0.00	11.45	H	50.25	73.98	23.73	PK
7311	27.64	0.00	11.45	H	39.09	53.98	14.89	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	43.31	0.00	2.83	V	46.14	73.98	27.84	PK
4924	32.05	0.00	2.83	V	34.88	53.98	19.10	AV
7386	38.15	0.00	11.87	V	50.02	73.98	23.96	PK
7386	27.34	0.00	11.87	V	39.21	53.98	14.77	AV
4924	43.91	0.00	2.83	H	46.74	73.98	27.24	PK
4924	32.25	0.00	2.83	H	35.08	53.98	18.90	AV
7386	38.38	0.00	11.87	H	50.25	73.98	23.73	PK
7386	27.18	0.00	11.87	H	39.05	53.98	14.93	AV

**Note:**

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.

**3. 106 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	42.60	0.00	1.76	V	44.36	73.98	29.62	PK
4824	31.50	0.00	1.76	V	33.26	53.98	20.72	AV
7236	38.83	0.00	12.28	V	51.11	73.98	22.87	PK
7236	27.13	0.00	12.28	V	39.41	53.98	14.57	AV
4824	43.25	0.00	1.76	H	45.01	73.98	28.97	PK
4824	31.82	0.00	1.76	H	33.58	53.98	20.40	AV
7236	38.75	0.00	12.28	H	51.03	73.98	22.95	PK
7236	27.21	0.00	12.28	H	39.49	53.98	14.49	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	41.11	0.00	1.96	V	43.07	73.98	30.91	PK
4874	30.69	0.00	1.96	V	32.65	53.98	21.33	AV
7311	38.99	0.00	11.45	V	50.44	73.98	23.54	PK
7311	27.68	0.00	11.45	V	39.13	53.98	14.85	AV
4874	42.95	0.00	1.96	H	44.91	73.98	29.07	PK
4874	30.80	0.00	1.96	H	32.76	53.98	21.22	AV
7311	38.75	0.00	11.45	H	50.20	73.98	23.78	PK
7311	27.72	0.00	11.45	H	39.17	53.98	14.81	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No. 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	42.88	0.00	2.83	V	45.71	73.98	28.27	PK
4924	31.65	0.00	2.83	V	34.48	53.98	19.50	AV
7386	39.83	0.00	11.87	V	51.70	73.98	22.28	PK
7386	27.09	0.00	11.87	V	38.96	53.98	15.02	AV
4924	43.20	0.00	2.83	H	46.03	73.98	27.95	PK
4924	31.85	0.00	2.83	H	34.68	53.98	19.30	AV
7386	39.88	0.00	11.87	H	51.75	73.98	22.23	PK
7386	27.16	0.00	11.87	H	39.03	53.98	14.95	AV

**Note:**

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.



**4. 242 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412  
 Channel No.: 01 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4824	41.85	0.00	1.76	V	43.61	73.98	30.37	PK
4824	30.89	0.00	1.76	V	32.65	53.98	21.33	AV
7236	38.85	0.00	12.28	V	51.13	73.98	22.85	PK
7236	27.25	0.00	12.28	V	39.53	53.98	14.45	AV
4824	42.35	0.00	1.76	H	44.11	73.98	29.87	PK
4824	31.00	0.00	1.76	H	32.76	53.98	21.22	AV
7236	39.05	0.00	12.28	H	51.33	73.98	22.65	PK
7236	27.34	0.00	12.28	H	39.62	53.98	14.36	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2437  
 Channel No.: 06 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4874	42.94	0.00	1.96	V	44.90	73.98	29.08	PK
4874	31.03	0.00	1.96	V	32.99	53.98	20.99	AV
7311	39.79	0.00	11.45	V	51.24	73.98	22.74	PK
7311	27.76	0.00	11.45	V	39.21	53.98	14.77	AV
4874	42.39	0.00	1.96	H	44.35	73.98	29.63	PK
4874	30.97	0.00	1.96	H	32.93	53.98	21.05	AV
7311	40.01	0.00	11.45	H	51.46	73.98	22.52	PK
7311	27.84	0.00	11.45	H	39.29	53.98	14.69	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2462  
 Channel No. 11 Ch


Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.-A.G+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
4924	41.50	0.00	2.83	V	44.33	73.98	29.65	PK
4924	30.40	0.00	2.83	V	33.23	53.98	20.75	AV
7386	39.01	0.00	11.87	V	50.88	73.98	23.10	PK
7386	26.98	0.00	11.87	V	38.85	53.98	15.13	AV
4924	42.72	0.00	2.83	H	45.55	73.98	28.43	PK
4924	30.58	0.00	2.83	H	33.41	53.98	20.57	AV
7386	39.43	0.00	11.87	H	51.30	73.98	22.68	PK
7386	27.07	0.00	11.87	H	38.94	53.98	15.04	AV

**Note:**

Channel 12 and 13 are less powerful than channel 11 so the test for high channel was performed at channel 11.


▣ Test Plots (242 Tone) - Y-H

Radiated Spurious Emissions plot – Average Reading (802.11ax(HE20), Ch.1 3rd Harmonic)

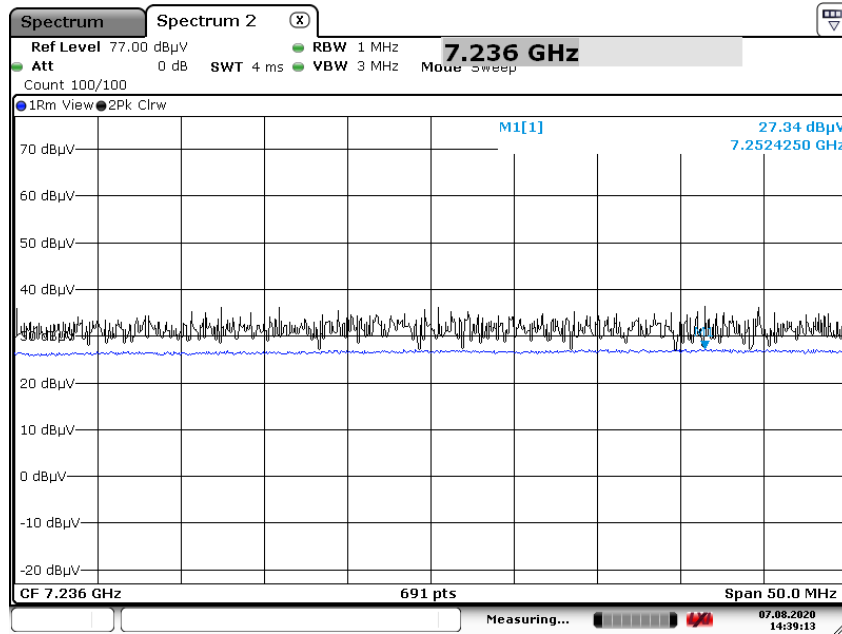

Date: 7.AUG.2020 14:39:12

Radiated Spurious Emissions plot – Peak Reading (802.11 ax(HE20), Ch.1 3rd Harmonic)

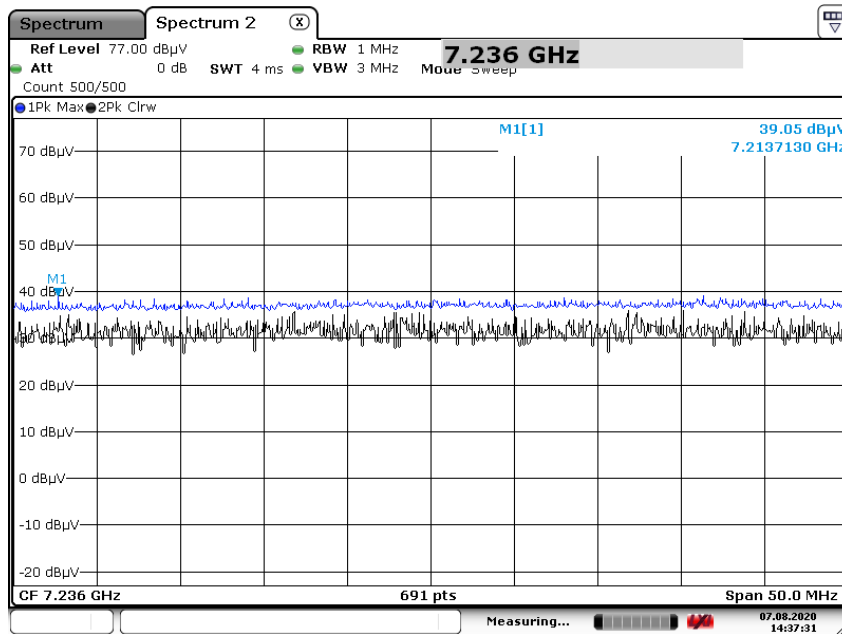

Date: 7.AUG.2020 14:37:31

**Note:**

Plot of worst case are only reported.

## 9.7 RADIATED RESTRICTED BAND EDGES

### 1. 26 Tone

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	23.672	0.00	34.77	H	58.44	73.98	15.54	PK
2390.0	11.569	0.00	34.77	H	46.34	53.98	7.64	AV
2390.0	23.315	0.00	34.77	V	58.09	73.98	15.90	PK
2390.0	11.431	0.00	34.77	V	46.20	53.98	7.78	AV
2483.5	24.402	0.00	34.25	H	58.65	73.98	15.33	PK
2483.5	11.512	0.00	34.25	H	45.76	53.98	8.22	AV
2483.5	23.594	0.00	34.25	V	57.84	73.98	16.14	PK
2483.5	11.311	0.00	34.25	V	45.56	53.98	8.42	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	26.632	0.00	34.25	H	60.88	73.98	13.10	PK
2483.5	10.792	0.00	34.25	H	45.04	53.98	8.94	AV
2483.5	26.611	0.00	34.25	V	60.86	73.98	13.12	PK
2483.5	10.699	0.00	34.25	V	44.95	53.98	9.03	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2472 MHz  
 Channel No. 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
# 2483.5 ~ 2484.5	29.390	0.00	34.25	H	63.64	73.98	10.34	PK
# 2484.5 ~ 2485.5	28.410	0.00	34.25	H	62.66	73.98	11.32	PK
2485.5	36.919	0.00	34.25	H	71.17	73.98	2.81	PK
# 2483.5 ~ 2484.5	16.170	0.00	34.25	H	50.42	53.98	3.56	AV
# 2484.5 ~ 2485.5	15.930	0.00	34.25	H	50.18	53.98	3.80	AV
2485.5	15.832	0.00	34.25	H	50.08	53.98	3.90	AV
# 2483.5 ~ 2484.5	28.894	0.00	34.25	V	63.14	73.98	10.84	PK
# 2484.5 ~ 2485.5	28.116	0.00	34.25	V	62.37	73.98	11.61	PK
2485.5	36.013	0.00	34.25	V	70.26	73.98	3.72	PK
# 2483.5 ~ 2484.5	16.010	0.00	34.25	V	50.26	53.98	3.72	AV
# 2484.5 ~ 2485.5	15.746	0.00	34.25	V	50.00	53.98	3.98	AV
2485.5	15.443	0.00	34.25	V	49.69	53.98	4.29	AV

Note :“#”: integration method Used (ANSI C63.10 Section11.13.3)

**2. 52 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	23.674	0.00	34.77	H	58.44	73.98	15.54	PK
2390.0	11.575	0.00	34.77	H	46.35	53.98	7.64	AV
2390.0	23.317	0.00	34.77	V	58.09	73.98	15.89	PK
2390.0	11.504	0.00	34.77	V	46.27	53.98	7.71	AV
2483.5	27.289	0.00	34.25	H	61.54	73.98	12.44	PK
2483.5	11.740	0.00	34.25	H	45.99	53.98	7.99	AV
2483.5	26.694	0.00	34.25	V	60.94	73.98	13.04	PK
2483.5	11.580	0.00	34.25	V	45.83	53.98	8.15	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	24.93	0.00	34.25	H	59.18	73.98	14.80	PK
2483.5	10.24	0.00	34.25	H	44.49	53.98	9.49	AV
2483.5	24.32	0.00	34.25	V	58.57	73.98	15.41	PK
2483.5	9.68	0.00	34.25	V	43.93	53.98	10.05	AV

Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
# 2483.5 ~ 2484.5	30.210	0.00	34.25	H	64.46	73.98	9.52	PK
# 2484.5 ~ 2485.5	27.950	0.00	34.25	H	62.20	73.98	11.78	PK
2485.5	35.738	0.00	34.25	H	69.99	73.98	3.99	PK
# 2483.5 ~ 2484.5	16.790	0.00	34.25	H	51.04	53.98	2.94	AV
# 2484.5 ~ 2485.5	15.690	0.00	34.25	H	49.94	53.98	4.04	AV
2485.5	14.671	0.00	34.25	H	48.92	53.98	5.06	AV
# 2483.5 ~ 2484.5	29.314	0.00	34.25	V	63.56	73.98	10.42	PK
# 2484.5 ~ 2485.5	27.335	0.00	34.25	V	61.59	73.98	12.40	PK
2485.5	35.116	0.00	34.25	V	69.37	73.98	4.61	PK
# 2483.5 ~ 2484.5	16.348	0.00	34.25	V	50.60	53.98	3.38	AV
# 2484.5 ~ 2485.5	15.421	0.00	34.25	V	49.67	53.98	4.31	AV
2485.5	14.443	0.00	34.25	V	48.69	53.98	5.29	AV

Note :“#”: integration method Used (ANSI C63.10 Section11.13.3)

**3. 106 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No.: 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	27.405	0.00	34.77	H	62.18	73.98	11.81	PK
2390.0	11.622	0.00	34.77	H	46.39	53.98	7.59	AV
2390.0	26.613	0.00	34.77	V	61.38	73.98	12.60	PK
2390.0	11.458	0.00	34.77	V	46.23	53.98	7.75	AV
2483.5	30.786	0.00	34.25	H	65.04	73.98	8.94	PK
2483.5	11.832	0.00	34.25	H	46.08	53.98	7.90	AV
2483.5	30.318	0.00	34.25	V	64.57	73.98	9.41	PK
2483.5	11.551	0.00	34.25	V	45.80	53.98	8.18	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz  
 Channel No.: 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	22.73	0.00	34.25	H	56.98	73.98	17.00	PK
2483.5	9.80	0.00	34.25	H	44.05	53.98	9.94	AV
2483.5	21.22	0.00	34.25	V	55.47	73.98	18.51	PK
2483.5	9.56	0.00	34.25	V	43.81	53.98	10.17	AV



Operation Mode:	802.11ax(HE20)
Transfer MCS Index:	0
Operating Frequency	2472 MHz
Channel No.	13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
# 2483.5 ~ 2484.5	30.360	0.00	34.25	H	64.61	73.98	9.37	PK
# 2484.5 ~ 2485.5	28.500	0.00	34.25	H	62.75	73.98	11.23	PK
2485.5	34.565	0.00	34.25	H	68.82	73.98	5.17	PK
# 2483.5 ~ 2484.5	16.830	0.00	34.25	H	51.08	53.98	2.90	AV
# 2484.5 ~ 2485.5	15.500	0.00	34.25	H	49.75	53.98	4.23	AV
2485.5	14.957	0.00	34.25	H	49.21	53.98	4.77	AV
# 2483.5 ~ 2484.5	29.541	0.00	34.25	V	63.79	73.98	10.19	PK
# 2484.5 ~ 2485.5	28.111	0.00	34.25	V	62.36	73.98	11.62	PK
2485.5	33.789	0.00	34.25	V	68.04	73.98	5.94	PK
# 2483.5 ~ 2484.5	16.341	0.00	34.25	V	50.59	53.98	3.39	AV
# 2484.5 ~ 2485.5	15.016	0.00	34.25	V	49.27	53.98	4.71	AV
2485.5	14.552	0.00	34.25	V	48.80	53.98	5.18	AV

Note :

“#”: integration method Used (ANSI C63.10 Section11.13.3)

**4. 242 Tone**

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2412 MHz, 2462 MHz  
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2390.0	30.558	0.00	34.77	H	65.33	73.98	8.65	PK
2390.0	13.482	0.00	34.77	H	48.25	53.98	5.73	AV
2390.0	30.110	0.00	34.77	V	64.88	73.98	9.10	PK
2390.0	13.284	0.00	34.77	V	48.05	53.98	5.93	AV
2483.5	32.577	0.00	34.25	H	66.83	73.98	7.15	PK
2483.5	12.715	0.00	34.25	H	46.97	53.98	7.01	AV
2483.5	31.384	0.00	34.25	V	65.63	73.98	8.35	PK
2483.5	12.546	0.00	34.25	V	46.80	53.98	7.18	AV

Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2467 MHz  
 Channel No. 12 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
2483.5	21.921	0.00	34.25	H	56.17	73.98	17.81	PK
2483.5	9.687	0.00	34.25	H	43.94	53.98	10.04	AV
2483.5	19.690	0.00	34.25	V	53.94	73.98	20.04	PK
2483.5	9.661	0.00	34.25	V	43.91	53.98	10.07	AV


Operation Mode: 802.11ax(HE20)  
 Transfer MCS Index: 0  
 Operating Frequency: 2472 MHz  
 Channel No.: 13 Ch

Frequency [MHz]	Reading [dBuV]	Duty Cycle Factor [dB]	A.F.+C.L.+D.F. [dB]	ANT. POL [H/V]	Total [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Measurement Type
# 2483.5 ~ 2484.5	29.960	0.00	34.25	H	64.21	73.98	9.77	PK
2484.5	35.460	0.00	34.25	H	69.71	73.98	4.27	PK
# 2483.5 ~ 2484.5	16.120	0.00	34.25	H	50.37	53.98	3.61	AV
2484.5	16.235	0.00	34.25	H	50.49	53.98	3.50	AV
# 2483.5 ~ 2484.5	28.891	0.00	34.25	V	63.14	73.98	10.84	PK
2484.5	34.421	0.00	34.25	V	68.67	73.98	5.31	PK
# 2483.5 ~ 2484.5	15.992	0.00	34.25	V	50.24	53.98	3.74	AV
2484.5	15.886	0.00	34.25	V	50.14	53.98	3.84	AV


Note : “#” integration method Used (ANSI C63.10 Section11.13.3)

■ Test Plots (26 Tone) X-H


Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.13) RU 8  
2485.5 ~ 2500 MHz

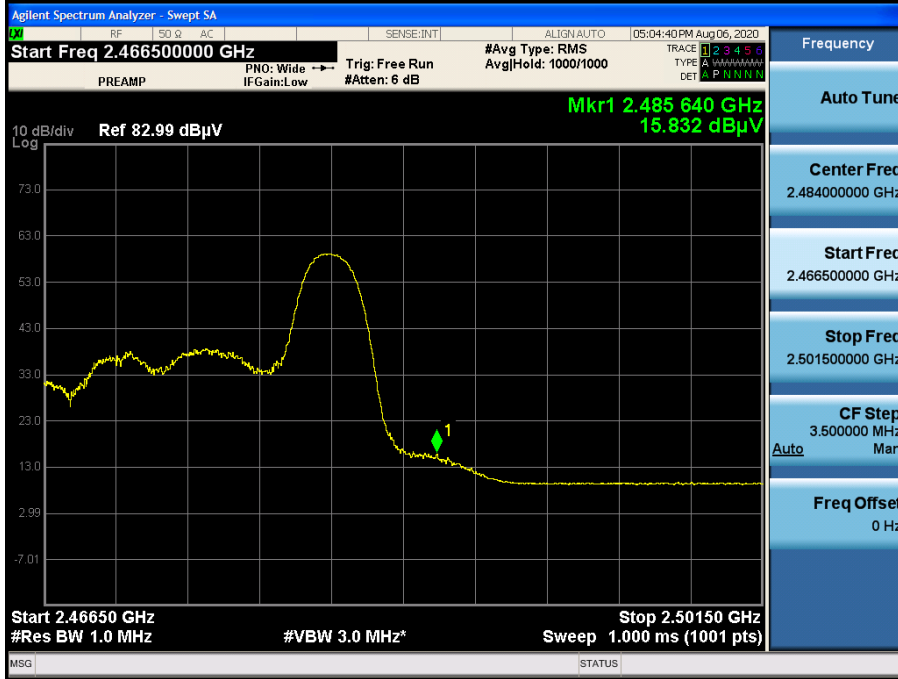


Radiated Restricted Band Edges plot – Peak Reading (802.11ax(HE20) Ch.13) RU 8  
2485.5 ~ 2500 MHz

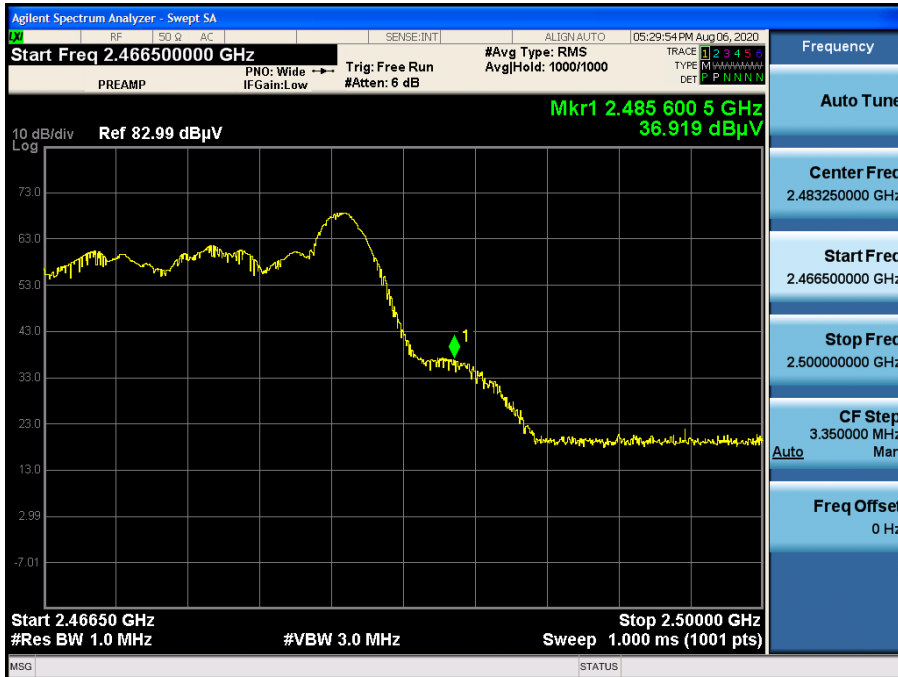


Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.13) RU 8  
Integration method \_ 2 483.5 MHz ~ 2 484.5 MHz

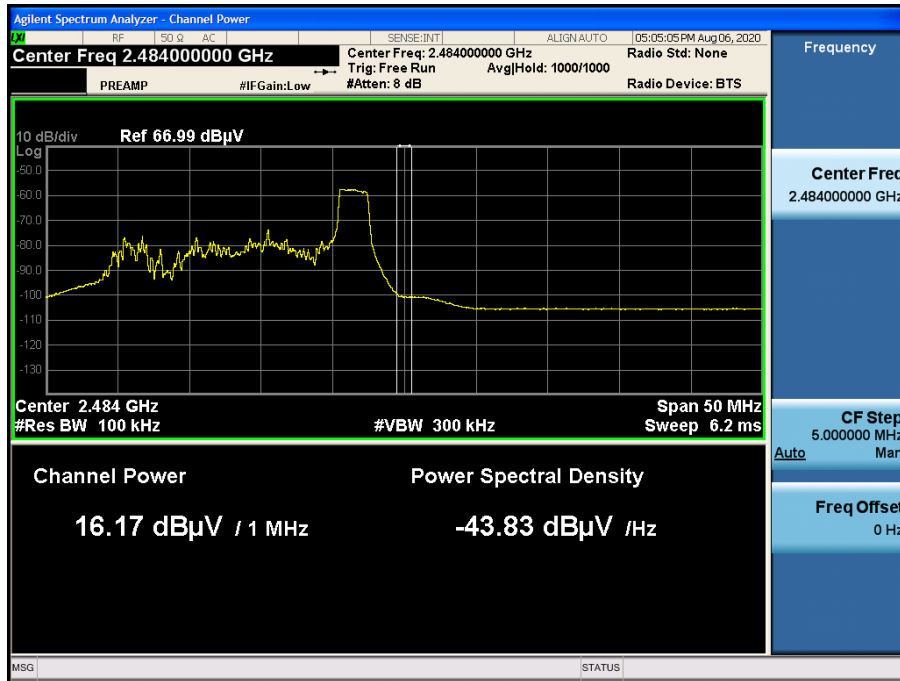


Radiated Restricted Band Edges plot – Peak Reading (802.11ax(HE20) Ch.13) RU 8  
Integration method \_ 2 483.5 MHz ~ 2 484.5 MHz

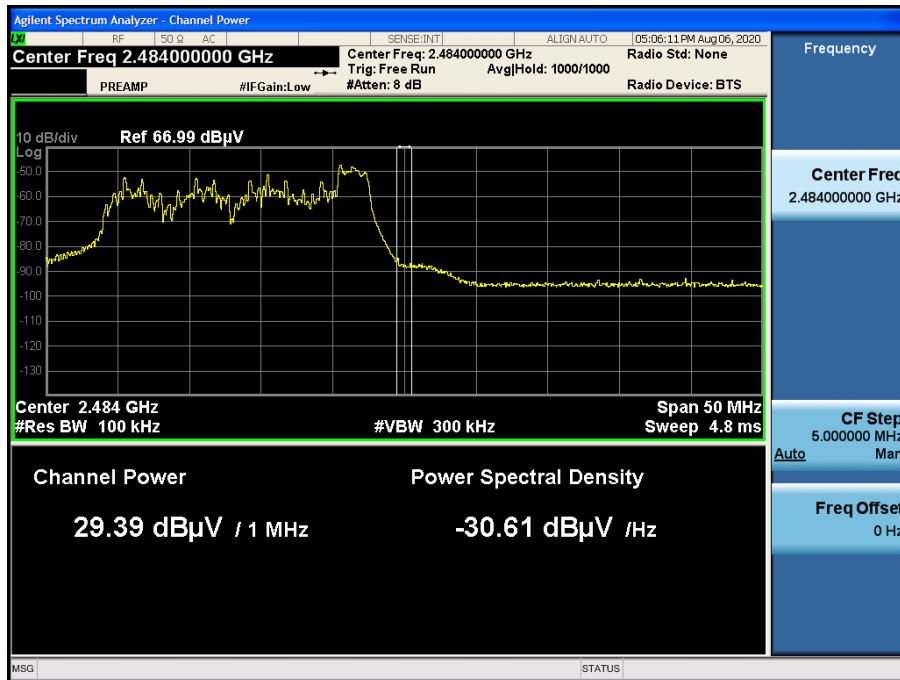

Radiated Restricted Band Edges plot – Average Reading (802.11ax(HE20) Ch.13) RU 8  
Integration method \_ 2 484.5 MHz ~ 2 485.5 MHz

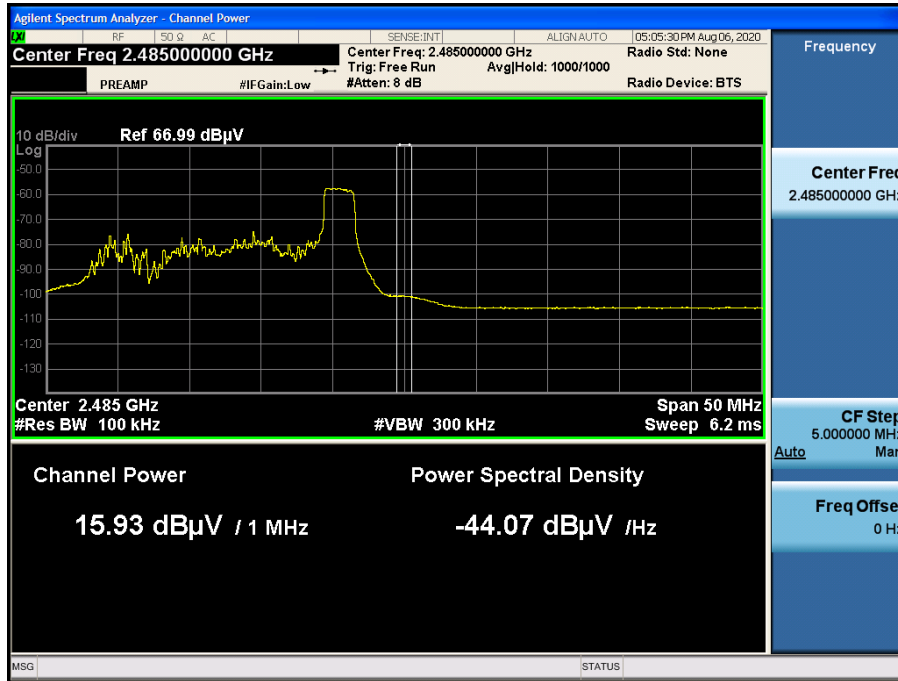

Radiated Restricted Band Edges plot – Peak Reading (802.11ax(HE20) Ch.13) RU 8  
Integration method \_ 2 484.5 MHz ~ 2 485.5 MHz

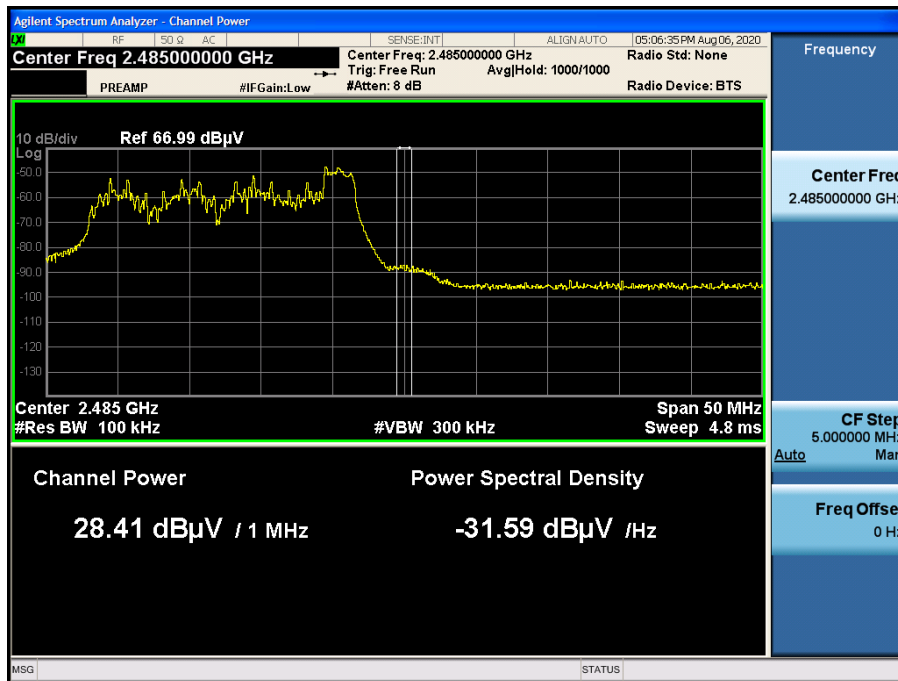

**Note:**

Plot of worst case are only reported.

### 10. LIST OF TEST EQUIPMENT

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/11/2019	Annual	102245
Rohde & Schwarz	ESCI / Test Receiver	06/05/2020	Annual	100033
ESPACE	SU-642 / Temperature Chamber	03/18/2020	Annual	0093008124
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9020A / Signal Analyzer	05/25/2020	Annual	MY52090906
Agilent	N9030A / Signal Analyzer	01/13/2020	Annual	MY49431210
Rohde & Schwarz	OSP 120 / Power Measurement Set	07/02/2020	Annual	101231
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Keysight	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/11/2019	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	05/25/2020	Annual	05001
Hewlett Packard	E3632A / DC Power Supply	06/12/2020	Annual	KR75303960
Agilent	8493C / Attenuator(10 dB)	06/26/2020	Annual	07560
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

**Radiated Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
Rohde & Schwarz	Loop Antenna	05/18/2020	Biennial	1513-175
Schwarzbeck	VULB 9168 / Hybrid Antenna	03/22/2019	Biennial	760
Schwarzbeck	BBHA 9120D / Horn Antenna	04/29/2019	Biennial	9120D-937
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	11/29/2019	Biennial	BBHA9170541
Rohde & Schwarz	FSP(9 kHz ~ 30 GHz) / Spectrum Analyzer	04/27/2020	Annual	100854
Rohde & Schwarz	FSV40-N / Spectrum Analyzer	09/26/2019	Annual	101068-SZ
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/21/2020	Annual	2
Wainwright Instruments	WRCJV5100/5850-40/50-8EEK / Band Reject Filter	02/10/2020	Annual	1
Wainwright Instruments	WHK3.0/18G-10EF / High Pass Filter	03/02/2020	Annual	8
Wainwright Instruments	WHKX8-6090-7000-18000-40SS/ High Pass Filter	03/02/2020	Annual	25
Api tech.	18B-03 / Attenuator (3 dB)	03/02/2020	Annual	1
Agilent	8493C-10 / Attenuator(10 dB)	03/02/2020	Annual	08285
CERNEX	CBLU1183540 / Power Amplifier	03/02/2020	Annual	22964
CERNEX	CBL06185030 / Power Amplifier	03/02/2020	Annual	22965
CERNEX	CBL18265035 / Power Amplifier	12/26/2019	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2020	Annual	25956

**Note:**

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).



**11. ANNEX A\_ TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2008-FC066-P