
HAC T-COIL Test Report

Applicant Name:
SAMSUNG Electronics Co., Ltd.
129, Samsung-ro, Yeongtong-gu, Suwon-Si, Gyeonggi-do,
16677 Rep. of Korea

Date of Issue: Sep. 09, 2020
Test Report No.: HCT-SR-2008-FC004-R1
Test Site: HCT CO., LTD.

FCC ID

A3LSMG781V

| | |
|-------------------------------|--------------------------------------|
| Equipment Type: | Mobile Phone |
| Application Type | Certification |
| FCC Rule Part(s): | CFR §20.19 , ANSI C63.19-2011 |
| Model Name: | SM-G781V |
| Additional Model Name: | |
| Date of Test: | 07/09/2020 ~ 07/22/2020 |

C63.19-2011
HAC Category

T3 (T-COIL CATEGORY)

This wireless portable device has been shown to be hearing-aid compatible under the above rated category, specified in ANSI/IEEE Std. C63.19-2011 and had been tested in accordance with the specified measurement procedures. Hearing-Aid Compatibility is based on the assumption that all production units will be designed electrically identical to the device tested in this report.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested By



Jung-Hun, Park
Test Engineer
SAR Team
Certification Division

Reviewed By



Yun-jeang, Heo
Technical Manager
SAR Team
Certification Division

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

REVISION HISTORY

The revision history for this test report is shown in table.

| Revision No. | Date of Issue | Description |
|---------------------|----------------------|------------------------|
| 0 | Aug. 25, 2020 | Initial Release |
| R1 | Sep. 09. 2020 | Revised the Page 6, 19 |

This test results were applied only to the test methods required by the standard.

The above Test Report is not related to the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA.

Table of Contents

| | |
|--|-----|
| 1. Test Regulations | 4 |
| 2. ATTESTATION OF TEST RESULT OF DEVICE UNDER TEST | 5 |
| 3. DEVICE UNDER TEST DESCRIPTION..... | 6 |
| 4. Test Methodology | 7 |
| 5. Measuring Instrument Calibraion | 8 |
| 6. Measurement Uncertainty..... | 9 |
| 7. Test Procedures for all Technologies | 10 |
| 8. Audio Level and Gain Measurements..... | 14 |
| 9 T-coil Measurement Criteria | 16 |
| 10. Device Under Test..... | 18 |
| 11. Air Interfaces and Operating Mode | 19 |
| 12. HAC (T-coil) Test Results | 20 |
| Attachment 1. HAC T-COIL Test Plots | 44 |
| Attachment 2. HAC T-Coil Probe Certificates | 251 |

1. Test Regulations

The tests were performed according to the following regulations:

| | |
|---------------|--|
| Test Standard | FCC 47 CFR §20.19 ANSI C63.19-2011 |
| Test Method | <ul style="list-style-type: none">· FCC CFR47 Part 20.19· ANSI C63.19 2011-version· FCC KDB 285076 D01 HAC Guidance v05r01· FCC KDB 285076 D02 T Coil testing v03· FCC KDB 285076 D03 HAC FAQ v01r02 |

2. ATTESTATION OF TEST RESULT OF DEVICE UNDER TEST

| Test Laboratory | |
|-----------------|--|
| Company Name: | HCT Co., LTD |
| Address: | 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of Korea |
| Telephone: | +82 31 645 6300 |
| Fax.: | +82 31 645 6401 |

| Attestation of SAR test result | |
|--------------------------------|-------------------------------|
| Applicant Name: | SAMSUNG Electronics Co., Ltd. |
| Model: | SM-G781V |
| Additional Model Name: | |
| EUT Type: | Mobile Phone |
| Application Type: | Certification |

2.1 Test Methodology

The Tests document in this report were performed in accordance with ANSI C63.19-2011 method of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids, FCC published KDB 285076 D01 HAC Guidance v05r01, FCC Published KDB285076 D03 HAC FAQ v01r01 and TCB Workshop updates .

3. DEVICE UNDER TEST DESCRIPTION

3.1 DUT specification

| Device Wireless specification overview | | |
|--|----------------|-----------------------------|
| Band & Mode | Operating Mode | Tx Frequency |
| CDMA/EVDO BC10 | Voice / Data | 817.90 MHz ~ 823.10 MHz |
| CDMA/EVDO BC0 | Voice / Data | 824.70 MHz ~ 848.31 MHz |
| CDMA/EVDO BC1 | Voice / Data | 1 851.25 MHz ~ 1 908.75 MHz |
| GSM850 | Voice / Data | 824.2 MHz ~ 848.8 MHz |
| GSM1900 | Voice / Data | 1 850.2 MHz ~ 1 909.8 MHz |
| UMTS 850 | Voice / Data | 826.4 MHz ~ 846.6 MHz |
| UMTS 1700 | Voice / Data | 1 712.4 MHz ~ 1 752.6 MHz |
| UMTS 1900 | Voice / Data | 1 852.4 MHz ~ 1 907.6 MHz |
| LTE Band 2 (PCS) | Voice / Data | 1 850.7 MHz ~ 1 909.3 MHz |
| LTE Band 4 (AWS) | Voice / Data | 1 710.7 MHz ~ 1 754.3 MHz |
| LTE Band 5 (Cell) | Voice / Data | 824.7 MHz ~ 848.3 MHz |
| LTE Band 7 | Voice / Data | 2 502.5 MHz ~ 2 567.5 MHz |
| LTE Band 12 | Voice / Data | 699.7 MHz ~ 715.3 MHz |
| LTE Band 13 | Voice / Data | 779.5 MHz ~ 784.5 MHz |
| LTE Band 14 | Voice / Data | 790.5 MHz ~ 795.5 MHz |
| LTE Band 25 | Voice / Data | 1 850.7 MHz ~ 1 914.3 MHz |
| LTE Band 26 | Voice / Data | 814.7 MHz ~ 848.3 MHz |
| LTE Band 29 | Voice / Data | 717 MHz ~ 728 MHz |
| LTE Band 30 | Voice / Data | 2 307.5 MHz ~ 2 312.5 MHz |
| LTE TDD Band 38 | Voice / Data | 2 572.5 MHz ~ 2 617.5 MHz |
| LTE TDD Band 40 | Voice / Data | 2 302.5 MHz ~ 2 397.5 MHz |
| LTE TDD Band 41 | Voice / Data | 2 498.5 MHz ~ 2 687.5 MHz |
| LTE Band 66 (AWS) | Voice / Data | 1 710.7 MHz ~ 1 779.3 MHz |
| LTE Band 71 | Voice / Data | 665.5 MHz ~ 695.5 MHz |
| NR Band n2 (PCS) | Data | 1 852.5 MHz ~ 1 907.5 MHz |
| NR Band n5 (Cell) | Data | 826.5 MHz ~ 846.5 MHz |
| NR Band n25 | Data | 1852.5 MHz ~ 1912.5 MHz |
| NR Band n41 | Data | 2 506.02 MHz ~ 2 679.99 MHz |
| NR Band n66 | Data | 1 712.5 MHz ~ 1 777.5 MHz |
| NR Band n71 | Data | 665.5 MHz - 695.5 MHz |
| NR Band n260 | Data | 37000 - 40000 MHz |
| NR Band n261 | Data | 27500 - 28350 MHz |
| U-NII-1 | Voice / Data | 5 180 MHz ~ 5 240 MHz |
| U-NII-2A | Voice / Data | 5 260 MHz ~ 5 320 MHz |
| U-NII-2C | Voice / Data | 5 500 MHz ~ 5 720 MHz |
| U-NII-3 | Voice / Data | 5 745 MHz ~ 5 825 MHz |
| 2.4 GHz WLAN | Voice / Data | 2 412 MHz ~ 2 472 MHz |
| Bluetooth / LE 5.0 | Data | 2 402 MHz ~ 2 480 MHz |
| NFC | Data | 13.56 MHz |
| MST | Data | 555Hz ~8.3 kHz |

4. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2011 Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids and FCC published procedure

KDB 285076 D01 HAC Guidance v05r01

KDB 285076 D03 HAC FAQ v01r02

TCB workshop updates

KDB 285076 D02 T-Coil testing for CMRS v03

5. Measuring Instrument Calibraion

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

| Name of Equipment | Manufacturer | Type/Model | Serial No. | Cal. Due Date |
|------------------------------|---------------|------------|--------------|---------------|
| ABM Probe | SPEAG | AM1DV3 | 3050 | 11/20/2020 |
| Data Acquisition Electronics | SPEAG | DAE3 | 504 | 02/26/2021 |
| ABM Probe | SPEAG | AM1DV3 | 3049 | 05/26/2021 |
| Data Acquisition Electronics | SPEAG | DAE4 | 868 | 09/04/2020 |
| DAC | Sound Devices | USBPre 2 | HB1318341009 | N/A |
| Radio Communication Tester | R & S | CMW 500 | 167916 | 10/23/2020 |
| Radio Communication Tester | R & S | CMW 500 | 167918 | 04/17/2021 |
| Radio Communication Tester | R & S | CMW 500 | 127521 | 05/15/2021 |

6. Measurement Uncertainty

Measurement Uncertainty for Audio Band Magnetic Measurement

| Error Description | Uncertainty values (±%) | Probe Dist. | Div. | C _i ABM1 | C _i ABM2 | Std. Unc. | |
|---|-------------------------|-------------|------|---------------------|---------------------|------------|-------------|
| | | | | | | ABM1 (±%) | ABM2 (±%) |
| Probe Sensitivity | | | | | | | |
| ReFereNce Level | 3.00 | N | 1 | 1 | 1 | 3.00 | 3.00 |
| AMCC Geometry | 0.40 | R | 1.73 | 1 | 1 | 0.23 | 0.23 |
| AMCC Current | 1.00 | R | 1.73 | 1 | 1 | 0.58 | 0.58 |
| Probe Positioning during Calibr. | 0.10 | R | 1.73 | 1 | 1 | 0.06 | 0.06 |
| Noise Contribution | 0.70 | R | 1.73 | 0.0143 | 1 | 0.01 | 0.40 |
| Frequency Slope | 5.90 | R | 1.73 | 0.1 | 1 | 0.34 | 3.41 |
| Probe System | | | | | | | |
| Repeatability / Drift | 1.00 | R | 1.73 | 1 | 1 | 0.58 | 0.58 |
| Linearity / Dynamic Range | 0.60 | R | 1.73 | 1 | 1 | 0.35 | 0.35 |
| Acoustic Noise | 1.00 | R | 1.73 | 0.1 | 1 | 0.06 | 0.58 |
| Probe Angle | 2.30 | R | 1.73 | 1 | 1 | 1.33 | 1.33 |
| Spectral Processing | 0.90 | R | 1.73 | 1 | 1 | 0.52 | 0.52 |
| Integration Time | 0.60 | N | 1.00 | 1 | 5 | 0.60 | 3.00 |
| Field Disturbation | 0.20 | R | 1.73 | 1 | 1 | 0.12 | 0.12 |
| Test Signal | | | | | | | |
| Ref. Signal Spectral Response | 0.60 | R | 1.73 | 0 | 1 | 0.00 | 0.35 |
| Positioning | | | | | | | |
| Probe Positioning | 1.90 | R | 1.73 | 1 | 1 | 1.10 | 1.10 |
| Phantom Thickness | 0.90 | R | 1.73 | 1 | 1 | 0.52 | 0.52 |
| DUT Positioning | 1.90 | R | 1.73 | 1 | 1 | 1.10 | 1.10 |
| External Contributions | | | | | | | |
| RF Interference | 0.00 | R | 1.73 | 1 | 0.3 | 0.00 | 0.00 |
| Test Signal Variation | 2.00 | R | 1.73 | 1 | 1 | 1.2 | 1.2 |
| Combined Std. Uncertainty (ABM field) | | | | | | 4.1 | 6.1 |
| Expanded Std. Uncertainty (%) | | | | | | 8.1 | 12.3 |
| Notes for table N - Nomal R - Rectangular Div. - Divisor used to obtain standard uncertainty | | | | | | | |

7. Test Procedures for all Technologies

7.1 General Procedures C63.19-2011, Section 7

ANSI C63.19-2011, Section 7

This document describes the procedures used to measure the ABM (T-Coil) performance of the WD. In addition to measuring the absolute signal levels, the A-weighted magnitude of the unintended signal shall also be determined. In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal must be made at the same location for all measurement positions. In addition, the RF field strength at each measurement location must be at or below that required for the assigned category.

Measurements shall not include undesired properties from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load may be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there may still be RF leakage from the WD, which may interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 7.1. If the device display can be turned off during a phone call then that may be done during the measurement as well.

Measurements shall be performed at two locations specified in A.3, with the correct probe orientation for a particular location, in a multistage sequence by first measuring the field intensity of the desired T-Coil signal (ABM1) that is useful to a hearing aid T-Coil. The undesired magnetic components (ABM2) must be measured at the same location as the desired ABM or T-Coil signal (ABM1), and the ratio of desired to undesired ABM signals must be calculated. For the perpendicular field location, only the ABM1 frequency response shall be determined in a third measurement stage. The flow chart in Figure 7.3 illustrates this three-stage, two orientation process.

The following steps summarize the basic test flow for determining ABM1 and ABM2. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of ABM1.

A validation of the test setup and instrumentation may be performed using a TMFS or Helmholtz coil. Measure the emissions and confirm that they are within the specified tolerance.

Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load as shown in Figure 7.1 or Figure 7.2. Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 7.3.1.

The drive level to the WD is set such that the reference input level specified in Table 7.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (ABM1) at $f = 1$ kHz. Either a sine wave at 1025 Hz or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as defined in 7.4.2, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.⁴⁶ The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.

Determine the magnetic measurement locations for the WD device (A.3), if not already specified by the manufacturer, as described in 7.4.4.1.1 and 7.4.4.2.

At each measurement location, measure and record the desired T-Coil magnetic signals (ABM1 at f_i) as described in 7.4.4.2 in each individual ISO 266-1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in item c) and the reading taken for that band.


Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input-output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as specified in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB A/m.)

All measurements of the desired signal shall be shown to be of the desired signal and not of an undesired signal. This may be shown by turning the desired signal ON and OFF with the probe measuring the same

location. If the scanning method is used the scans shall show that all measurement points selected for the ABM1 measurement meet the ambient and test system noise criteria in 7.3.1.

At the measurement location for each orientation, measure and record the undesired broadband audio magnetic signal (ABM2) as specified in 7.4.4.4 with no audio signal applied (or digital zero applied, if appropriate) using A-weighting and the half-band integrator. Calculate the ratio of the desired to undesired signal strength (i.e., signal quality). Obtain the data from the postprocessor, SEMCAD, and determine the category that properly classifies the signal quality based on Table 8.5.

Test Setup Diagram

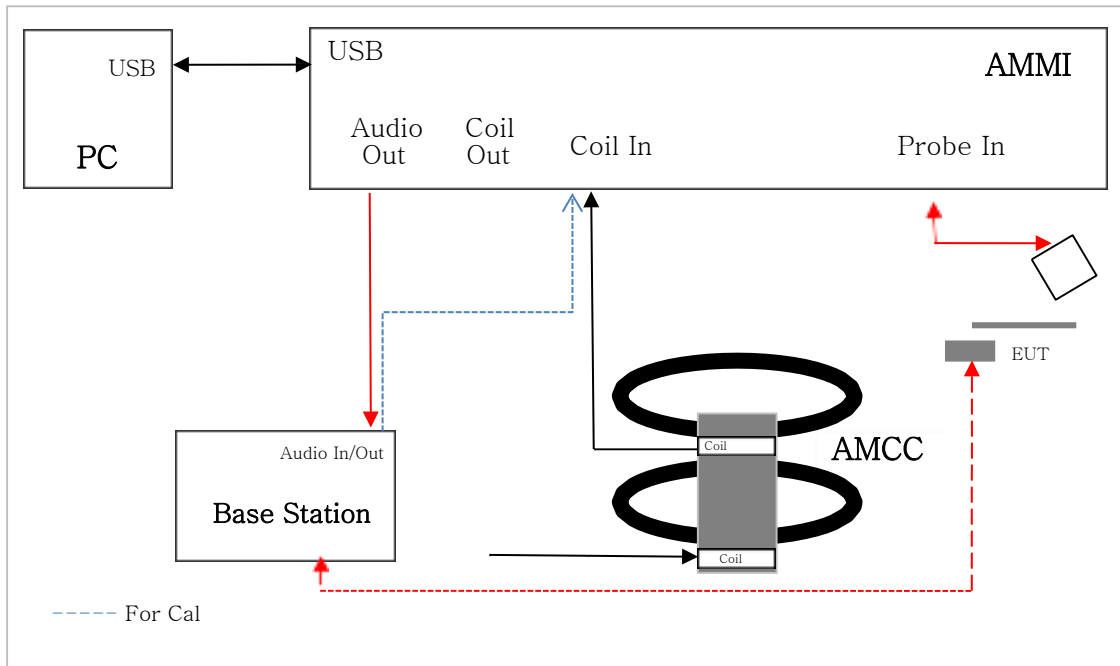

7.2 VoWiFi – For PAG REUSE

This device supports Wi-Fi calling (aka Voice over Wi-Fi or VoWiFi) which is an extended feature of the carriers CMRS service to offload VoLTE calls onto local area networks over WI-FI via the internet and subject to HAC assessment for phones with a HAC rating. HAC assessment for this feature is subject to Pre Approval Guidance.

The set up for VoWiFi uses the Base station as described in section 7.1 with the exception that the reference audio level is set at -20dBm0. The reference level is calibrated using the standard call box calibration procedures with the exception of the -20dBm0 reference level being used (refer to section 8.4).


An investigation was performed to determine worst case codec, bit rate and air interface configuration (refer to sections 12.5 and 12.6).

7.3 Over the Top(OTT) – For PAG REUSE

This device supports VoIP via a preinstalled application that uses the **Google Duo** service, using **OPUS** as its only codec (refer to §11 for air interface details and §12.7 for codec bit rates). VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications and the assessment is subject to Pre-Approval Guidance procedures.


The equipment is set up as shown below with a support device used to originate the call using the IP transport. The support device connects to the cloud-based **Google Duo** service via Wi-Fi access point and router, or RJ45. The DUT connects to the VoIP service via a cellular/unlicensed air interface to the call box and an Ethernet connection from call box to Internet. The various codec bit rate and air interface configurations are evaluated to determine the worst-case configuration (refer to §12.7).

Test Setup configuration for OTT calls

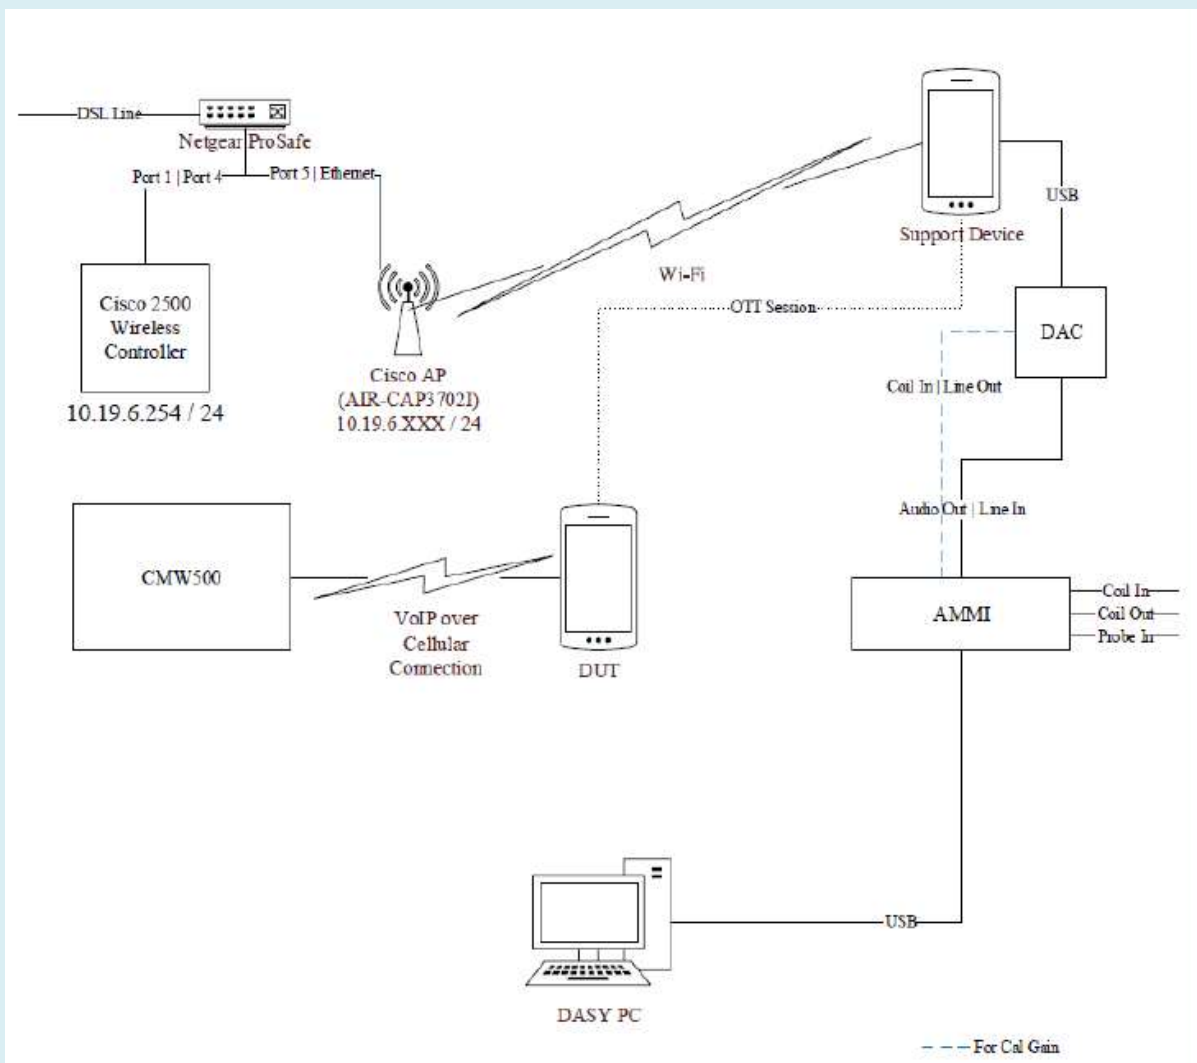

For the OTT call, the calibrated audio card within the CMW500 cannot be used so the AMMI is connected to an external Digital-Analog Converter (DAC) and the DAC is connected to the Support Device via USB. The test signal is sent from the DASY PC to the AMMI, from the AMMI to the DAC, from the DAC to the Support Device, and, via the VoIP call, to the DUT.

As this test set up uses an external DAC between the AMMI's audio output and support device, the appropriate gain factor for the OTT call needs be determined. This is done by connecting the DAC between the AMMI Audio output and Coil input as shown below.

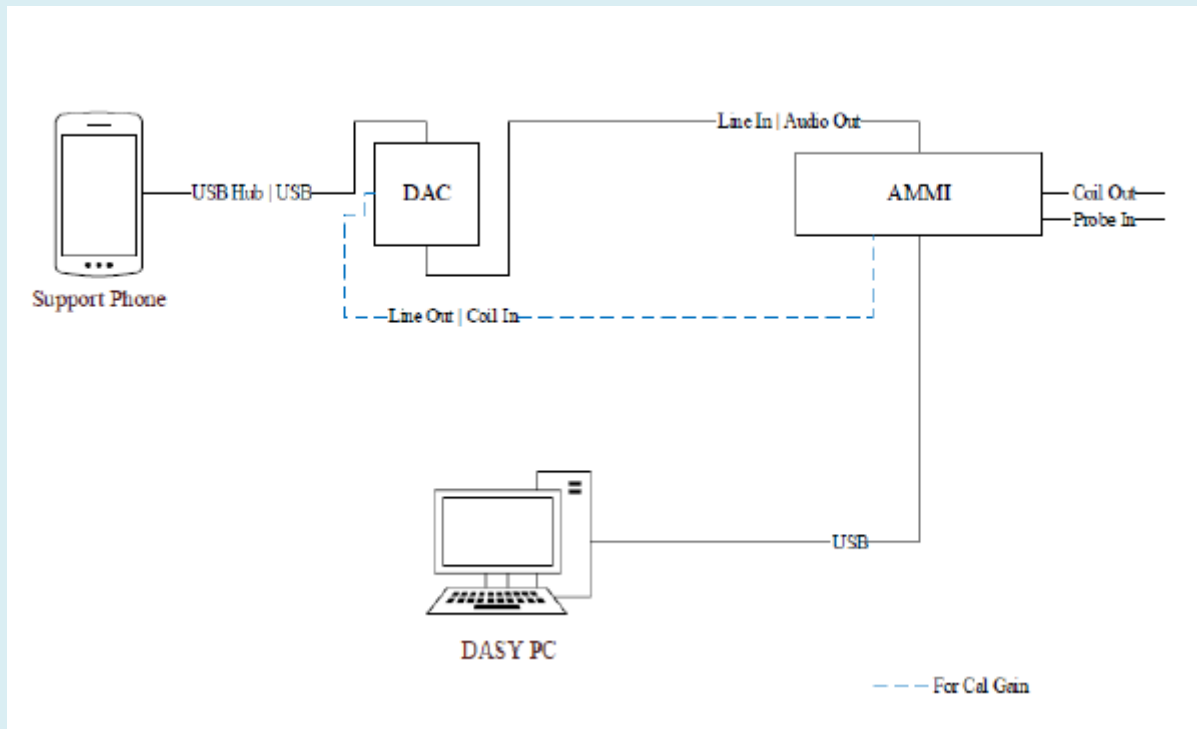

Using the metering function on the DAC, the DAC gain is adjusted until the volume reaches 0 dBFS (3.14 dBm0 based on TIA/EIA 810-A). SPEAG's "TN-LK-05042018-C-T-Coil_Levels" document (Appendix E) steps E through H are then followed to determine the adjusted gain values as detailed in §8.5 so that the reference level is set to 23.14dB below full scale, i.e. at -20dBm0. A verification of the DAC's output is performed prior to testing.

8. Audio Level and Gain Measurements

8.1 GSM

Refer to the below table for the gains used to measure GSM.

| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 khz | -16 | 27.90 | 24.83 |
| Voice 300 - 3 khz | -19 | 34.61 | 53.52 |

8.2 W-CDMA

Refer to the below table for the gains used to measure W-CDMA.

| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 khz | -16 | 27.90 | 24.83 |
| Voice 300 - 3 khz | -19 | 34.61 | 53.52 |

8.3 CDMA

Refer to the below table for the gains used to measure GSM.

| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 khz | -18 | 25.88 | 19.68 |
| Voice 300 - 3 khz | -19 | 34.59 | 53.24 |

8.4 VOLTE

Refer to the below table for the gains used to measure VoLTE.

The following software/firmware was used to simulate the VoLTE server for testing:

| Firmware | License Keys | Software Name |
|-------------------|---|---|
| V3.7.30 for LTE | KS500 KS550 | LTE FDD R8 SIG BASIC LTE TDD R8 SIG BASIC |
| V3.7.20 for Audio | KA100 KA150 KAA20 KM050 KS104 | IP APPL ENABLING IPv4 IP APPL ENABLING IPv6 IP APPL IMS BASIC DATA APPL MEAS EVS SPEECH CODEC |

| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 khz | -16 | 28.36 | 26.18 |
| Voice 300 - 3 khz | -19 | 35.07 | 56.27 |

8.5 VOWi-Fi

Refer to the below table for the gains used to measure VoWi-Fi.

| Firmware | License Keys | Software Name |
|-------------------|--------------|-----------------------|
| V3.7.40 for WLAN | KS650 | WLAN A/B/G SIG BASIC |
| | KS651 | WLAN N SIG BASIC |
| | KS656 | WLAN IEEE 802.11ac |
| | KS657 | WLAN IEEE 802.11ax |
| V3.7.20 for Audio | KA100 | IP APPL ENABLING IPv4 |
| | KA150 | IP APPL ENABLING IPv4 |
| | KAA20 | IP APPL IMS BASIC |
| | KM050 | DATA APPL MEAS |
| | KS104 | EVS SPEECH CODEC |
| | | |

| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-------------------|----------------------|--------------|------------------|
| Voice 1 kHz | -20 | 23.91 | 15.66 |
| Voice 300 - 3 kHz | -20 | 33.62 | 47.52 |

8.6 Over the Top(OTT) – For PAG REUSE

For EDGE, HSPA, LTE and Wi-Fi the linear gain levels listed below were used. The results below are based on a reference input level of -20 dBm.

To calibrate the DAC (refer §7.3), three. Way audio files (sine wave, 1kHz voice, and 300 to 3 kHz voice) are sent from the DASY5 PC to the AMMI, then to the DAC. The Helmholtz resonator measures the field strength, which represents the AMMI to DAC input sensitivity. After determining the input sensitivity, the adjusted linear gain values can then be calculated.


| Signal Type | Audio Level [dBm] | Gain [dB] | Gain [linear] |
|-----------------|----------------------|--------------|------------------|
| Voice 1 kHz | -20 | 27.18 | 20.21 |
| Voice 300-3 kHz | -20 | 36.89 | 61.50 |

9 T-coil Measurement Criteria

9.1 Frequency Responses


The frequency response of the axial component of the magnetic field, measured in 1/3 octave bands, shall follow the response curve, over the frequency range 300 Hz to 3000 Hz.

Figure 8.1 and Figure 8.2 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been **corrected from the raw readings**.

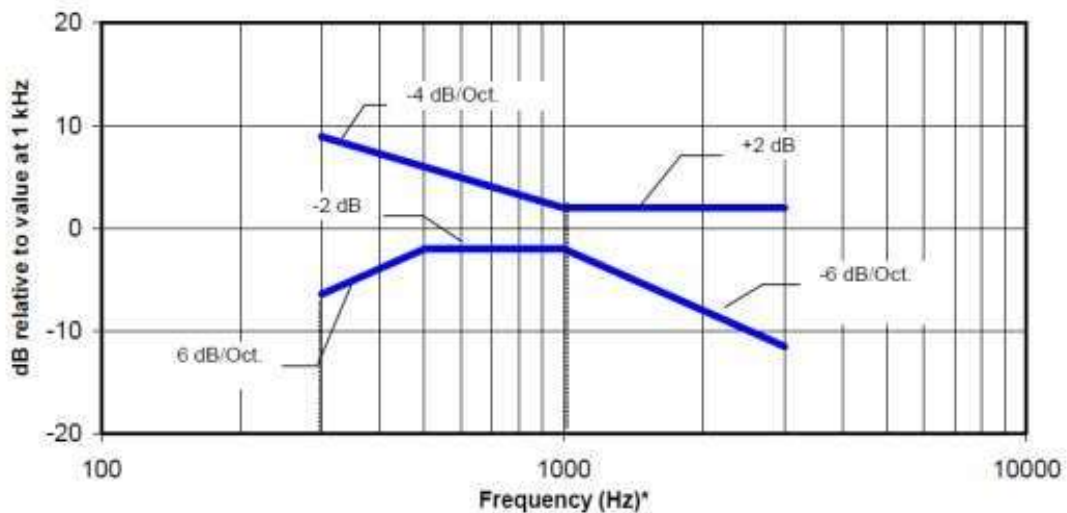

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.1—Magnetic field frequency response for WDs with field strength ≤ -15 dB (A/m) at 1 kHz

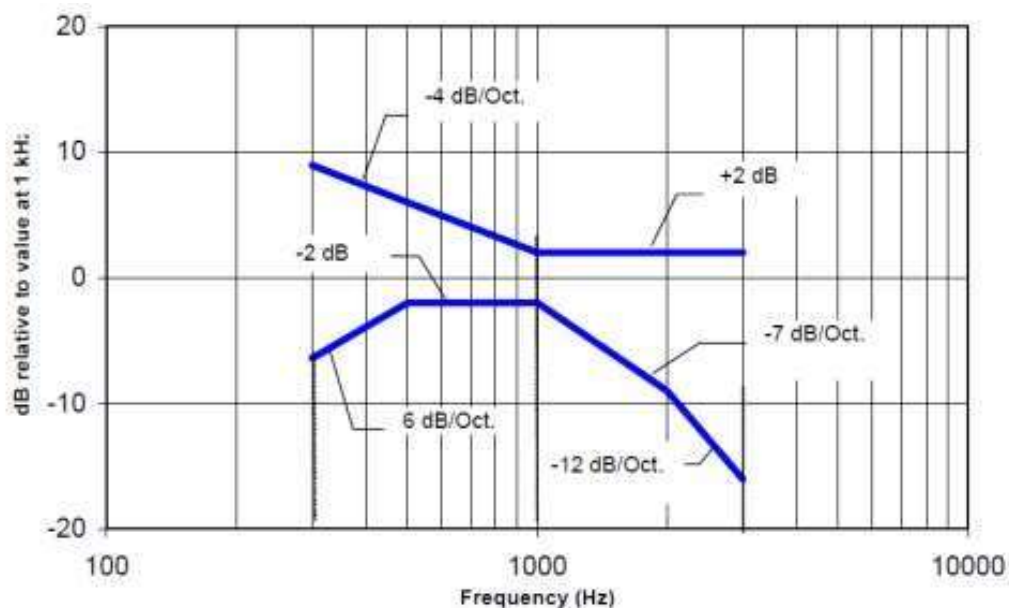

NOTE—The frequency response is between 300 Hz and 3000 Hz.

Figure 8.2—Magnetic field frequency response for WDs with a field that exceeds -15 dB(A/m) at 1 kHz

9.2 Signal to Noise


This specifies the signal-to-noise quality requirement for the intended T-Coil signal from a WD. The worst signal to noise of the two T-Coil signal measurements, as determined in Clause 7, shall be used to determine the T-Coil mode category per Table 8.5.

Only the RF immunity of the hearing aid is measured in T-Coil mode. It is assumed that a hearing aid can have no immunity to an interference signal in the audio band, which is the intended reception band for this mode. So, the only criterion that can be measured is the RF immunity in T-Coil Mode. This is measured using the same procedure as for the audio coupling mode and at the same levels as specified in 6.4.

| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Table 8.5- T-Coil signal-to-noise categories

Measurement locations and reference plane to be used for the T-coil measurements.

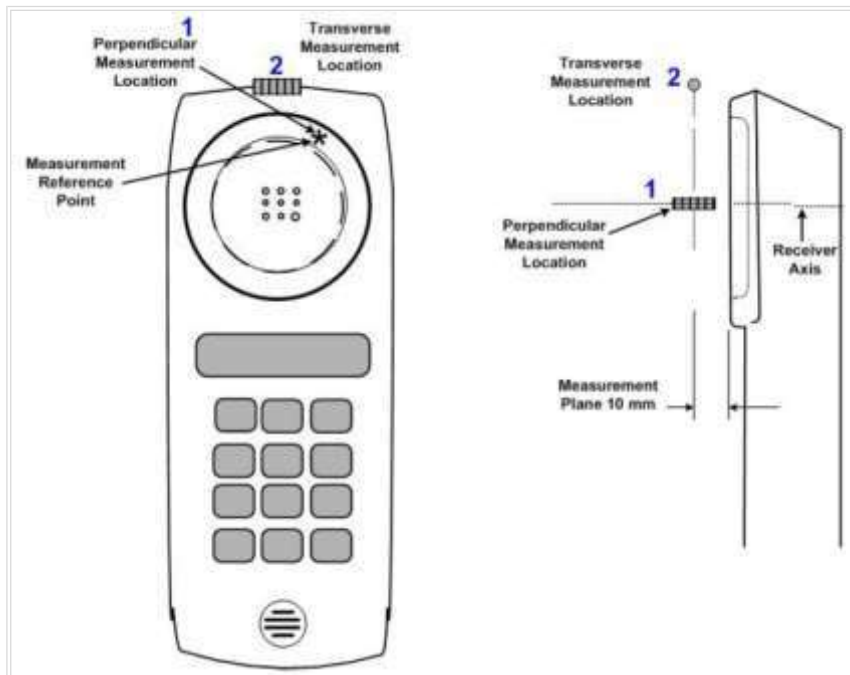

10. Device Under Test

| | | |
|--------------------------------|---------------------------------|-------------|
| Normal operation | Held to head | |
| Back Cover | The Back Cover is not removable | |
| Test sample information | S/N | Notes |
| | TFP0749H | T-coil Test |
| | TFP0714H | T-coil Test |
| | TG70436M | T-coil Test |
| | TG70415M | T-coil Test |

11. Air Interfaces and Operating Mode

| Air Interface | Bands (MHz) | Type | C63.19 Tested | Simultaneous Transmitter | Audio Codecs Evaluated |
|---|-----------------|------|--------------------|--|---|
| GSM | 850 | VO | Yes | Wi-Fi, BT | EFR |
| | 1900 | | | | |
| | GPRS/EDGE | VD | Yes ³ | Wi-Fi, BT | OPUS ² |
| W-CDMA (UMTS) | 850 | VO | Yes | Wi-Fi, BT | AMR-NB & AMR-WB |
| | 1700 | | | | |
| | 1900 | VD | Yes ³ | Wi-Fi, BT | OPUS ² |
| CDMA | 800 | VO | Yes | Wi-Fi, BT | EVRC-B & 8k-EVRC |
| | 850 | VO | Yes | Wi-Fi, BT | |
| | 1900 | VO | Yes | Wi-Fi, BT | |
| | 1xEvDO | VD | Yes ³ | Wi-Fi, BT | OPUS ² |
| LTE - FDD | 680(B 71) | VD | Yes ¹ | Wi-Fi, BT | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS ² |
| | 700 (B12/13/17) | | | | |
| | 850 (B5/26) | | | | |
| | 1700 (B4/66) | | | | |
| | 1900 (B2/25) | | | | |
| | 2300 (B30) | | | | |
| | 2500 (B7) | | | | |
| LTE – TDD | 2600 (B41) | VD | Yes ^{1,3} | Wi-Fi, BT | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS ² |
| | 3600 (B48) | | | | |
| | 2600 (B38) | | | | |
| | 2300 (B40) | | | | |
| NR -FDD | 850 (n5) | VD | Yes ⁴ | Wi-Fi, BT | OPUS ² |
| | 1900 (n2) | | | | |
| | 1700 (n66) | | | | |
| | 680 (n71) | | | | |
| NR -TDD | 2600 (n41) | VD | Yes ⁴ | Wi-Fi, BT | OPUS ² |
| | 28000 (n261) | | No ⁵ | | |
| | 39000 (n260) | | No ⁵ | | |
| Wi-Fi | 2450 | VD | Yes ³ | WWAN | AMR-NB, AMR- WB, EVS-NB, EVS-WB & OPUS ² |
| | 5200 (U-NII-1) | | | | |
| | 5300 (U-NII-2A) | | | | |
| | 5500 (U-NII-2C) | | | | |
| | 5800 (U-NII-3) | | | | |
| BT | 2450 | DT | NA | WWAN and Wifi 5GHz | N/A |
| Type: VO: Legacy Cellular Voice Service DT: Digital Transport only (no voice) CMRS: Commercial Mobile Radio Service VD: IP Voice service over Digital Transport | | | | Note: 1. Ref Lev in accordance with the July 2012 VoLTE interpretation 2. Ref Lev -20 dBm0 3. For PAG REUSE 4. NR was evaluated using an interim procedure outlined section 12.9.1 5. n260,n261 are currently outside the scope of ANSI C63.19 and FCC HAC regulations. This DUT dose not support VOMmWave for n261,n260 | |

12. HAC (T-coil) Test Results

12.1 Codec Investigation

An investigation between the various codec configurations (Low/High bit rates for Narrowband, Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each CDMA, GSM, W-CDMA, LTE FDD/TDD.

The highlighted results below were determined to be the worst case codec configuration(s) for CDMA,GSM, W- CDMA and LTE.

| Codec Investigation | | | | |
|---------------------|-----------------|---------|-----------------|--------------------------|
| Codec State | AMR-NB (kbit/s) | | Orientation | Band/ Channel |
| | EVRC-B | 8k-EVRC | | |
| ABM1 (dB/m) | 6.36 | 6.09 | z (Axial) | CDMA/EVDO BC0 CH. 384 |
| ABM2 (dBA/m) | -36.10 | -36.29 | | |
| S+N/N (dB) | 42.46 | 42.38 | | |
| Freq. Resposne (dB) | 1.35 | 1.28 | | |
| ABM1 (dB/m) | -4.65 | -5.08 | y (Transversal) | |
| ABM2 (dBA/m) | -44.66 | -45.17 | | |
| S+N/N (dB) | 40.01 | 40.10 | | |

| Codec Investigation | | | | |
|---------------------|-----------------|--------|-----------------|-------------------|
| Codec State | AMR-NB (kbit/s) | | Orientation | Band/ Channel |
| | FR V1 | HR V1 | | |
| ABM1 (dB/m) | 9.83 | 10.24 | z (Axial) | GSM 850 CH.190 |
| ABM2 (dBA/m) | -16.99 | -18.07 | | |
| S+N/N (dB) | 26.82 | 28.31 | | |
| Freq. Resposne (dB) | 1.61 | 1.91 | | |
| ABM1 (dB/m) | -0.92 | -2.76 | y (Transversal) | |
| ABM2 (dBA/m) | -28.87 | -31.59 | | |
| S+N/N (dB) | 27.94 | 28.83 | | |

| Codec Investigation | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|------------------------------------|
| Codec State | AMR-NB (kbit/s) | | | AMR-WB (kbit/s) | | | Orientation | Band/ Bandwidth/ Channel |
| | 4.75 | 7.4 | 12.2 | 6.6 | 15.85 | 23.85 | | |
| ABM1 (dB/m) | 2.81 | 5.20 | 9.80 | -6.08 | 0.22 | 4.72 | z (Axial) | WCDMA Band II Rel.99 CH.9400 |
| ABM2 (dBA/m) | -29.06 | -26.34 | -22.08 | -35.11 | -29.39 | -24.82 | | |
| S+N/N (dB) | 31.87 | 31.54 | 31.88 | 29.03 | 29.61 | 29.54 | | |
| Freq. Resposne (dB) | 1.64 | 1.72 | 1.54 | 1.14 | 1.47 | 1.36 | | |
| ABM1 (dB/m) | -5.39 | -2.34 | -8.04 | -2.42 | -5.77 | -2.60 | y (Transversal) | |
| ABM2 (dBA/m) | -36.33 | -33.52 | -39.38 | -30.77 | -34.78 | -31.52 | | |
| S+N/N (dB) | 30.93 | 31.18 | 31.34 | 28.35 | 29.01 | 28.92 | | |

| Codec Investigation | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|---|--|---|--|
| Codec State | AMR-NB (kbit/s) | | | AMR-WB (kbit/s) | | | Orientation | Band/ Bandwidth/ Channel | | | |
| | 4.75 | 7.4 | 12.2 | 6.6 | 15.85 | 23.85 | | | | | |
| ABM1 (dB/m) | 10.75 | 10.45 | 10.64 | 7.44 | 8.30 | 8.32 | z (Axial) | LTE Band 25 CH.26365 20 Mhz BW QPSK RB 100/0 | | | |
| ABM2 (dBA/m) | -42.64 | -44.59 | -44.80 | -42.91 | -44.44 | -44.51 | | | | | |
| S+N/N (dB) | 53.39 | 55.04 | 55.44 | 50.36 | 52.74 | 52.83 | | | | | |
| Freq. Resposne(dB) | 2.00 | 1.95 | 1.93 | 1.67 | 1.31 | 1.20 | | | | | |
| ABM1 (dB/m) | 2.01 | 3.46 | 3.46 | -0.25 | 1.12 | 1.26 | y (Transversal) | | | LTE Band 25 CH.26365 20 Mhz BW QPSK RB 100/0 | |
| ABM2 (dBA/m) | -44.47 | -43.25 | -43.64 | -42.90 | -43.18 | -43.42 | | | | | |
| S+N/N (dB) | 46.48 | 46.72 | 47.10 | 42.65 | 44.31 | 44.69 | | | | | |

| Codec Investigation | | | | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|--|---|--|
| Codec State | EVS-NB (kbit/s) | | | EVS-WB (kbit/s) | | | EVS-SWB (kbit/s) | | | Orientation | Band/ BandWidth/ Channel | | | |
| | 5.9 | 13.2 | 24.4 | 5.9 | 13.2 | 24.4 | 9.6 | 16.4 | 24.4 | | | | | |
| ABM1 (dB/m) | 9.49 | 6.34 | 7.76 | 4.22 | 6.97 | 8.67 | 4.61 | 9.06 | 9.39 | z (Axial)) | LTE Band 25 CH.26365 20 Mhz BW QPSK RB 100/0 | | | |
| ABM2 (dBA/m) | -29.54 | -35.59 | -34.00 | -33.57 | -35.64 | -34.68 | -37.54 | -32.79 | -35.72 | | | | | |
| S+N/N (dB) | 39.02 | 41.94 | 41.75 | 37.79 | 42.62 | 43.35 | 42.15 | 41.85 | 45.11 | | | | | |
| Freq.Resposne(dB) | 1.57 | 1.72 | 1.62 | 1.80 | 1.68 | 1.58 | 1.34 | 1.09 | 1.01 | | | | | |
| ABM1 (dB/m) | 0.32 | 0.84 | 2.48 | -5.03 | 1.39 | 0.94 | 1.72 | 0.03 | 2.21 | y (Transversal) | | | LTE Band 25 CH.26365 20 Mhz BW QPSK RB 100/0 | |
| ABM2 (dBA/m) | -36.69 | -39.99 | -37.87 | -41.03 | -39.60 | -39.66 | -39.30 | -40.49 | -40.66 | | | | | |
| S+N/N (dB) | 37.01 | 40.83 | 40.34 | 35.99 | 40.99 | 40.60 | 41.02 | 40.52 | 42.88 | | | | | |

| Codec Investigation | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|---|--|---|--|
| Codec State | AMR-NB (kbit/s) | | | AMR-WB (kbit/s) | | | Orientation | Band/ Bandwidth/ Channel | | | |
| | 4.75 | 7.4 | 12.2 | 6.6 | 15.85 | 23.85 | | | | | |
| ABM1 (dB/m) | 7.13 | 7.31 | 7.44 | 4.36 | 8.22 | 8.34 | z (Axial) | LTE Band 41 CH.40620 20 Mhz BW QPSK RB 100/0 | | | |
| ABM2 (dBA/m) | -32.24 | -33.98 | -33.88 | -33.78 | -33.52 | -33.57 | | | | | |
| S+N/N (dB) | 41.37 | 41.29 | 41.32 | 38.14 | 41.73 | 41.90 | | | | | |
| Freq. Resposne(dB) | 2.00 | 2.00 | 1.84 | 1.27 | 1.12 | 1.06 | | | | | |
| ABM1 (dB/m) | -2.20 | -1.74 | -1.50 | -4.60 | -0.73 | -0.74 | y (Transversal) | | | LTE Band 41 CH.40620 20 Mhz BW QPSK RB 100/0 | |
| ABM2 (dBA/m) | -39.36 | -39.32 | -39.39 | -39.28 | -39.02 | -39.36 | | | | | |
| S+N/N (dB) | 37.16 | 37.58 | 37.89 | 34.68 | 38.29 | 38.62 | | | | | |

| Codec Investigation | | | | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|--|---|--|
| Codec State | EVS-NB (kbit/s) | | | EVS-WB (kbit/s) | | | EVS-SWB (kbit/s) | | | Orientation | Band/ BandWidth/ Channel | | | |
| | 5.9 | 13.2 | 24.4 | 5.9 | 13.2 | 24.4 | 9.6 | 16.4 | 24.4 | | | | | |
| ABM1 (dB/m) | 9.20 | 12.70 | 12.70 | -3.21 | 8.27 | 7.85 | 8.75 | 9.24 | 8.91 | z (Axial)) | LTE Band 41 CH.40620 20 Mhz BW QPSK RB 100/0 | | | |
| ABM2 (dBA/m) | -28.19 | -28.01 | -28.57 | -32.68 | -30.89 | -32.03 | -31.54 | -31.98 | -31.85 | | | | | |
| S+N/N (dB) | 37.39 | 40.71 | 41.27 | 29.48 | 39.16 | 39.88 | 40.29 | 41.22 | 40.76 | | | | | |
| Freq.Resposne(dB) | 1.81 | 1.83 | 1.90 | 1.66 | 1.85 | 1.84 | 1.69 | 1.91 | 1.87 | | | | | |
| ABM1 (dB/m) | -3.92 | -0.16 | 3.83 | -1.04 | -4.47 | -0.60 | 0.59 | -0.07 | 0.29 | y (Transversal) | | | LTE Band 41 CH.40620 20 Mhz BW QPSK RB 100/0 | |
| ABM2 (dBA/m) | -38.24 | -39.90 | -36.52 | -35.37 | -41.39 | -38.10 | -37.55 | -38.09 | -38.01 | | | | | |
| S+N/N (dB) | 34.32 | 39.75 | 40.35 | 34.32 | 36.91 | 37.50 | 38.14 | 38.02 | 38.30 | | | | | |

12.2 TDD Configuration

LTE TDD Uplink-Downlink Configuration Investigation for VoLTE over IMS

An investigation was performed to determine the worst-case Uplink-Downlink configuration for VoLTE over IMS T-Coil testing. The effects of UL-DL configuration were found to be independent of band and bandwidth; therefore, only one band and bandwidth were used for this investigation.

Per 3GPP TS 36.211, the total frame length for each TDD radio frame of length $T_f = 307200 \cdot T_s = 10$ ms, where T_s is a number of time units equal to $1/(15000 \times 2048)$ seconds. Additionally, each radio frame consists of 10 subframes, each of length $30720 \cdot T_s = 1$ ms, and subframes can be designated as uplink (U), downlink (D), or special subframe (S), depending on the Uplink-Downlink configuration as indicated in Table 4.2-2 of 3GPP TS 36.211. In the transmission duty factor calculation, the special subframe configuration with the shortest UpPTS duration within the special subframe is used and will be applied for measurement. From 3GPP TS 36.211 Table 4.2-1, the shortest UpPTS is $2192 \cdot T_s$ which occurs in the normal cyclic prefix and special subframe configuration 4.

See table below outlining the calculated transmission duty cycles for each Uplink-Downlink configuration:

Uplink-Downlink Configurations for Type 2 Frame Structures

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number | | | | | | | | | | Calculated Transmission Duty Cycle (%) |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|--|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 0 | 5 ms | D | S | U | U | U | D | S | U | U | U | 61.4% |
| 1 | 5 ms | D | S | U | U | D | D | S | U | U | D | 41.4% |
| 2 | 5 ms | D | S | U | D | D | D | S | U | D | D | 21.4% |
| 3 | 10 ms | D | S | U | U | U | D | D | D | D | D | 30.7% |
| 4 | 10 ms | D | S | U | U | D | D | D | D | D | D | 20.7% |
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D | 10.7% |
| 6 | 5 ms | D | S | U | U | U | D | S | U | U | D | 51.4% |

Power Class 3 Uplink-Downlink Configuration Investigation

VoLTE over IMS was evaluated with the following radio configuration → channel 40620, 20MHz BW, QPSK, 100RB, 0Offset. all configurations (0-6) are supported. The configuration which resulted in the worst z (Axial), y(Transversal) SNR was used for full testing. Uplink-Downlink configuration 0 was used as the worst-case configuration for VoLTE over IMS T-Coil testing. See table below for the SNR comparison between each Uplink-Downlink configuration:

VoLTE over IMS SNNR by UL-DL Configuration

| Frequency [MHz] | Channel | Bandwidth [MHz] | Modulation | RB Size | RB Offset | UL-DL Configuration | ABM1 [dB(A/m)] | ABM2 [dB(A/m)] | Orientation | Freq. Response (dB) | SNR [dB] |
|-----------------|---------|-----------------|------------|---------|-----------|---------------------|----------------|----------------|--------------------|---------------------|--------------|
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 0 | -3.21 | -32.68 | z (Axial) | 1.66 | 29.48 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 1 | 4.69 | -31.00 | | 1.79 | 35.69 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 2 | 5.64 | -28.84 | | 1.77 | 34.48 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 3 | 2.45 | -33.58 | | 1.82 | 36.04 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 4 | -0.05 | -35.47 | | 1.81 | 35.42 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 5 | 1.63 | -33.46 | | 1.82 | 35.08 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 6 | 1.66 | -31.90 | | 1.87 | 33.57 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 0 | -1.04 | -35.37 | y (Transversal) | | 34.32 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 1 | -10.78 | -40.66 | | | 29.88 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 2 | -12.47 | -38.11 | | | 25.64 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 3 | -5.45 | -37.80 | | | 32.36 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 4 | -5.21 | -34.84 | | | 29.63 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 5 | -6.37 | -40.00 | | | 33.64 |
| 2593.0 | 40620 | 20 | QPSK | 100 | 0 | 6 | -7.46 | -38.21 | | | 30.75 |

Per the investigations above, UL-DL Configuration 2 was used to evaluate VoLTE over IMS

12.3 Air Interface Investigation

Use the worst-case codec test and document a limited set of bands/modulations/channels/bandwidth. Observe the effect of changing the band and bandwidth to ensure that there are no unexpected variations.

GSM / W-CDMA / CDMA (UMTS)

| Mode | Ch. Freq. | Orientation | ABM1 dB (A/m) | ABM2 dB (A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABMSNR (dB) | T-Rating | Plot No. |
|---|-----------------------|----------------|---------------|---------------|-----------------------|---------------------|--------------|----------|----------|
| GSM 850 Voice Coder Speech Codec: FR V1 | CH.128 824.2 MHz | z(Axial) | 9.90 | -19.05 | -54.15 | 2.00 | 28.94 | T3 | |
| | | y(Transversal) | -3.44 | -32.17 | -55.59 | | 28.74 | T3 | |
| | CH.190 836.6 MHz | z(Axial) | 9.83 | -16.99 | -54.18 | 1.61 | 26.82 | T3 | 1/ 2 |
| | | y(Transversal) | -0.92 | -28.87 | -55.59 | | 27.94 | T3 | 3 |
| | CH.251 848.8 MHz | z(Axial) | 10.10 | -17.69 | -54.18 | 2.00 | 27.79 | T3 | |
| | | y(Transversal) | -0.26 | -28.98 | -55.59 | | 28.72 | T3 | |
| GSM 1900 Voice Coder Speech Codec: FR V1 | CH.661 1880.0 MHz | z(Axial) | 6.95 | -22.90 | -54.18 | 1.98 | 29.85 | T3 | 4/ 5 |
| | | y(Transversal) | -3.15 | -31.95 | -55.59 | | 28.80 | T3 | 6 |
| W-CDMA Band II Voice AMR WB Codec:6.6 kbit/s | CH.9262 1852.4 MHz | z(Axial) | 2.24 | -28.10 | -54.18 | 1.15 | 30.24 | T4 | |
| | | y(Transversal) | -15.60 | -44.57 | -55.59 | | 28.97 | T3 | |
| | CH.9400 1880.0 MHz | z(Axial) | -6.08 | -35.11 | -54.18 | 1.14 | 29.03 | T3 | 7/ 8 |
| | | y(Transversal) | -2.42 | -30.77 | -55.59 | | 28.35 | T3 | 9 |
| | CH.9538 836.6 MHz | z(Axial) | 2.49 | -27.36 | -54.18 | 1.06 | 29.85 | T3 | |
| | | y(Transversal) | -5.34 | -34.45 | -55.59 | | 29.11 | T3 | |
| W-CDMA Band IV Voice WB AMR Codec: 6.6 kbit/s | CH.1412 1732.4 MHz | z(Axial) | 1.30 | -29.61 | -54.18 | 1.37 | 30.91 | T4 | 10/11 |
| | | y(Transversal) | -9.90 | -38.89 | -55.59 | | 28.99 | T3 | 12 |
| W-CDMA Band V Voice AMR WB Codec: 6.6 kbit/s | CH.4183 836.6 MHz | z(Axial) | 2.49 | -27.28 | -54.18 | 1.19 | 29.76 | T3 | 13/14 |
| | | y(Transversal) | -12.30 | -40.91 | -55.59 | | 28.62 | T3 | 15 |
| CDMA BC0 SO68/RC1 Codec: EVRC-B | CH. 384 836.52 MHz | z(Axial) | 4.99 | -36.83 | -54.78 | 1.27 | 41.82 | T4 | 16/17 |
| | | y(Transversal) | -5.09 | -45.76 | -55.61 | | 40.67 | T4 | 18 |
| CDMA BC1 SO68/RC1 Codec: EVRC-B | CH. 600 1880 MHz | z(Axial) | 5.94 | -38.91 | -54.78 | 1.23 | 44.85 | T4 | 19/20 |
| | | y(Transversal) | -5.10 | -47.84 | -55.61 | | 42.74 | T4 | 21 |
| CDMA BC10 SO68/RC1 Codec: EVRC-B | CH. 450 817.25 MHz | z(Axial) | 5.45 | -34.48 | -54.78 | 1.30 | 39.93 | T4 | |
| | | y(Transversal) | -5.31 | -43.59 | -55.61 | | 38.28 | T4 | |
| | CH. 560 820 MHz | z(Axial) | 6.36 | -36.10 | -54.78 | 1.35 | 42.46 | T4 | |
| | | y(Transversal) | -4.65 | -44.66 | -55.61 | | 40.01 | T4 | |
| | CH. 670 822.75 MHz | z(Axial) | 5.79 | -39.12 | -54.78 | 1.36 | 44.91 | T4 | |
| | | y(Transversal) | -4.94 | -47.68 | -55.61 | | 42.74 | T4 | |
| CDMA BC10 SO68/RC3 Codec: EVRC-B | CH. 450 817.25 MHz | z(Axial) | 5.44 | -34.32 | -54.78 | 1.30 | 39.75 | T4 | 22/23 |
| | | y(Transversal) | -5.55 | -43.23 | -55.61 | | 37.68 | T4 | 24 |
| CDMA BC10 SO68/RC4 Codec: EVRC-B | CH. 450 817.25 MHz | z(Axial) | 6.05 | -34.30 | -54.78 | 1.36 | 40.36 | T4 | |
| | | y(Transversal) | -4.81 | -42.77 | -55.61 | | 37.96 | T4 | |

Air Interface Investigation(Contiued)

LTE-FDD

| Mode: | Ch. Freq. | BW | BW/ Modulation | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|------------------------|--------|----------------|----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 25 Voice EVS-WB Codec: 5.9 kbit/s | CH.26365 1882.5 MHz | 20 MHz | QPSK | 1/0 | z(Axial) | -1.73 | -40.04 | -46.98 | 1.67 | 38.31 | T4 | |
| | | | | | y(Transversal) | -6.52 | -42.87 | -46.70 | | 36.35 | T4 | |
| | | | | 1/49 | z(Axial) | 2.33 | -35.27 | -46.98 | 1.78 | 37.60 | T4 | |
| | | | | | y(Transversal) | -6.19 | -42.24 | -46.70 | | 36.05 | T4 | |
| | | | | 1/99 | z(Axial) | 1.95 | -35.64 | -46.98 | 1.95 | 37.59 | T4 | |
| | | | | | y(Transversal) | -7.08 | -43.38 | -46.70 | | 36.61 | T4 | |
| | | | | 50/0 | z(Axial) | 5.36 | -33.87 | -46.98 | 1.61 | 39.23 | T4 | |
| | | | | | y(Transversal) | -4.58 | -40.98 | -46.70 | | 36.40 | T4 | |
| | | | | 50/25 | z(Axial) | 6.25 | -33.89 | -46.98 | 1.86 | 40.14 | T4 | |
| | | | | | y(Transversal) | -2.60 | -40.38 | -46.70 | | 37.78 | T4 | |
| | | | | 50/49 | z(Axial) | 5.45 | -32.21 | -46.98 | 1.99 | 37.66 | T4 | 25/ 26 |
| | | | | | y(Transversal) | -7.97 | -38.99 | -46.70 | | 31.02 | T4 | 27 |
| | | 100/0 | z(Axial) | 4.22 | -33.57 | -46.98 | 1.80 | 37.79 | T4 | | | |
| | | | y(Transversal) | -5.03 | -41.03 | -46.70 | | 35.99 | T4 | | | |
| | | 16QAM | 50/49 | z(Axial) | -1.93 | -39.58 | -46.98 | 1.71 | 37.65 | T4 | | |
| | | | | y(Transversal) | -2.61 | -39.24 | -46.70 | | 36.63 | T4 | | |
| | | 64QAM | 50/49 | z(Axial) | 4.61 | -33.67 | -46.98 | 2.00 | 38.28 | T4 | | |
| | | | | y(Transversal) | -1.36 | -37.36 | -46.70 | | 36.00 | T4 | | |
| | | 15 MHz | QPSK | 36/18 | z(Axial) | 3.07 | -36.77 | -46.98 | 1.78 | 39.85 | T4 | |
| | | | | | y(Transversal) | -4.63 | -39.72 | -46.70 | | 35.09 | T4 | |
| | | 10 MHz | QPSK | 25/12 | z(Axial) | 2.68 | -35.64 | -46.98 | 1.75 | 38.32 | T4 | |
| | | | | | y(Transversal) | -2.42 | -38.83 | -46.70 | | 36.41 | T4 | |
| | | 5 MHz | QPSK | 12/6 | z(Axial) | -2.91 | -41.08 | -46.98 | 2.00 | 38.17 | T4 | |
| | | | | | y(Transversal) | -6.19 | -40.19 | -46.70 | | 34.00 | T4 | |
| 3 MHz | QPSK | 8/3 | z(Axial) | 4.55 | -33.95 | -46.98 | 1.77 | 38.51 | T4 | | | |
| | | | y(Transversal) | -2.24 | -38.45 | -46.70 | | 36.20 | T4 | | | |
| 1.4 MHz | QPSK | 3/1 | z(Axial) | 4.51 | -33.60 | -46.98 | 1.83 | 38.11 | T4 | | | |
| | | | y(Transversal) | -3.66 | -39.10 | -46.70 | | 35.44 | T4 | | | |

Air Interface Investigation(Contiued)

LTE-FDD

| Mode | Ch. Freq. | Band width | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|-----------------------|------------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 7 Voice EVS WB Codec: 5.9 kbit/s | CH.21100 2535 MHz | 20 MHz | QPSK | 50/49 | z(Axial) | -5.40 | -43.21 | -46.98 | 1.80 | 37.81 | T4 | 28/ 29 |
| | | | | | y(Transversal) | -0.88 | -37.99 | -46.70 | | 37.11 | T4 | 30 |
| LTE Band 12 Voice EVS WB Codec: 5.9 kbit/s | CH.23095 707.5 MHz | 10 MHz | QPSK | 25/24 | z(Axial) | 1.18 | -37.55 | -46.98 | 1.86 | 38.73 | T4 | 31/ 32 |
| | | | | | y(Transversal) | -1.82 | -39.35 | -46.70 | | 37.54 | T4 | 33 |
| LTE Band 13 Voice EVS WB Codec: 5.9 kbit/s | CH.23230 782 MHz | 10 MHz | QPSK | 25/24 | z(Axial) | -0.13 | -38.74 | -46.98 | 1.85 | 38.61 | T4 | 34/ 35 |
| | | | | | y(Transversal) | -8.01 | -41.81 | -46.70 | | 33.80 | T4 | 36 |
| LTE Band 14 Voice EVS WB Codec: 5.9 kbit/s | CH.23330 793 MHz | 10 MHz | QPSK | 25/24 | z(Axial) | 5.68 | -35.80 | -46.98 | 1.81 | 41.48 | T4 | 37/ 38 |
| | | | | | y(Transversal) | -6.09 | -41.63 | -46.70 | | 35.54 | T4 | 39 |
| LTE Band 26 Voice EVS WB Codec: 5.9 kbit/s | CH.26865 831.5 MHz | 10 MHz | QPSK | 25/24 | z(Axial) | 3.66 | -33.57 | -46.98 | 1.91 | 37.23 | T4 | 40/ 41 |
| | | | | | y(Transversal) | -1.50 | -38.04 | -46.70 | | 36.54 | T4 | 42 |
| LTE Band 30 Voice EVS WB Codec: 5.9 kbit/s | CH.27710 2310 MHz | 10 MHz | QPSK | 25/24 | z(Axial) | -0.00 | -38.06 | -46.98 | 1.88 | 38.06 | T4 | 43/ 44 |
| | | | | | y(Transversal) | -4.38 | -40.18 | -46.70 | | 35.79 | T4 | 45 |
| LTE Band 66 Voice EVS WB Codec: 5.9 kbit/s | CH.132322 1745 MHz | 20 MHz | QPSK | 50/49 | z(Axial) | -2.01 | -40.34 | -46.98 | 1.81 | 38.33 | T4 | 46/ 47 |
| | | | | | y(Transversal) | -8.67 | -43.68 | -46.70 | | 35.01 | T4 | 48 |
| LTE Band 71 Voice EVS WB Codec: 5.9 kbit/s | CH.133322 683 MHz | 20 MHz | QPSK | 50/49 | z(Axial) | -0.86 | -39.20 | -46.98 | 1.89 | 38.34 | T4 | 49/ 50 |
| | | | | | y(Transversal) | -2.52 | -40.45 | -46.70 | | 37.93 | T4 | 51 |
| LTE Band 25 Voice EVS WB Codec: 5.9 kbit/s | CH.26090 1855 MHz | 20 MHz | QPSK | 50/49 | z(Axial) | -0.83 | -39.19 | -46.98 | 1.81 | 38.35 | T4 | |
| | | | | | y(Transversal) | -5.65 | -42.48 | -46.70 | | 36.83 | T4 | |
| | CH.26640 1910 MHz | 20 MHz | QPSK | 50/49 | z(Axial) | -2.83 | -41.36 | -46.98 | 1.71 | 38.53 | T4 | |
| | | | | | y(Transversal) | -5.52 | -41.25 | -46.70 | | 35.73 | T4 | |

Air Interface Investigation(Contiued) 7

LTE-TDD

| Mode | Ch. Freq. | BW | BW/ Modulation | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|----------------------|--------|----------------|----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 41 Voice EVS-WB Codec: 5.9kbit/s | CH.40620 2593 MHz | 20 MHz | QPSK | 1/0 | z(Axial) | -1.75 | -31.93 | -46.98 | 1.32 | 30.18 | T4 | |
| | | | | | y(Transversal) | -11.42 | -40.05 | -46.68 | | 28.63 | T3 | |
| | | | | 1/49 | z(Axial) | 1.60 | -31.16 | -46.98 | 1.44 | 32.76 | T4 | |
| | | | | | y(Transversal) | -6.74 | -38.06 | -46.68 | | 31.32 | T4 | |
| | | | | 1/99 | z(Axial) | 2.63 | -31.48 | -46.98 | 1.37 | 34.11 | T4 | |
| | | | | | y(Transversal) | -7.40 | -38.30 | -46.68 | | 30.90 | T4 | |
| | | | | 50/0 | z(Axial) | 6.40 | -26.43 | -46.98 | 1.61 | 32.83 | T4 | |
| | | | | | y(Transversal) | -3.09 | -38.09 | -46.68 | | 35.00 | T4 | |
| | | | | 50/25 | z(Axial) | 5.45 | -30.30 | -46.98 | 1.36 | 35.75 | T4 | |
| | | | | | y(Transversal) | -6.97 | -41.21 | -46.68 | | 34.24 | T4 | |
| | | | | 50/49 | z(Axial) | -5.49 | -35.04 | -46.98 | 1.53 | 29.56 | T3 | |
| | | | | | y(Transversal) | -1.07 | -35.54 | -46.68 | | 34.47 | T4 | |
| | | | | 100/0 | z(Axial) | 5.64 | -28.84 | -46.98 | 1.71 | 34.48 | T4 | 52/ 53 |
| | | | | | y(Transversal) | -12.47 | -38.11 | -46.68 | | 25.64 | T3 | 54 |
| | | 16QAM | 100/0 | z(Axial) | 1.41 | -32.09 | -47.00 | 1.62 | 33.50 | T4 | | |
| | | | | y(Transversal) | -3.24 | -38.33 | -46.79 | | 35.09 | T4 | | |
| | | 64QAM | 100/0 | z(Axial) | -2.73 | -32.25 | -47.00 | 1.55 | 29.52 | T3 | | |
| | | | | y(Transversal) | -2.40 | -35.11 | -46.79 | | 32.71 | T4 | | |
| | | 15 MHz | QPSK | 75/0 | z(Axial) | 3.59 | -29.03 | -47.00 | 1.66 | 32.62 | T4 | |
| | | | | | y(Transversal) | -4.18 | -36.28 | -46.79 | | 32.11 | T4 | |
| | | 10 MHz | QPSK | 50/0 | z(Axial) | 4.35 | -28.66 | -47.00 | 1.44 | 33.00 | T4 | |
| | | | | | y(Transversal) | -8.13 | -37.33 | -46.79 | | 29.20 | T3 | |
| | | 5 MHz | QPSK | 25/0 | z(Axial) | 2.40 | -27.58 | -47.00 | 1.15 | 29.99 | T3 | |
| | | | | | y(Transversal) | -10.08 | -40.68 | -46.79 | | 30.60 | T4 | |

| Mode | Ch. Freq. | BW | BW/ Modulation | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|------------------------|--------|----------------|----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| LTE Band 38 Voice EVS-WB Codec: 5.9kbit/s | CH.38000 2595 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 2.83 | -25.66 | -47.00 | 1.36 | 28.48 | T3 | 55/ 56 |
| | | | | | y(Transversal) | -10.05 | -40.46 | -46.79 | | 30.41 | T4 | 57 |
| LTE Band 40 Voice EVS-WB Codec: 5.9kbit/s | CH.38750 2310 MHz | 10 MHz | QPSK | 50/0 | z(Axial) | 1.93 | -30.93 | -47.00 | 1.54 | 32.86 | T4 | 58/ 59 |
| | | | | | y(Transversal) | -5.22 | -39.73 | -46.79 | | 34.50 | T4 | 60 |
| LTE Band 40 Voice EVS-WB Codec: 5.9kbit/s | CH.39200 2355 MHz | 10 MHz | QPSK | 50/0 | z(Axial) | 1.63 | -31.24 | -46.79 | 1.33 | 32.87 | T4 | 61/ 62 |
| | | | | | y(Transversal) | -8.20 | -42.57 | -47.00 | | 34.37 | T4 | 63 |
| LTE Band 41 Voice EVS-WB Codec: 5.9kbit/s | CH.39750 2506 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 3.71 | -25.55 | -47.00 | 1.63 | 29.26 | T3 | |
| | | | | | y(Transversal) | -12.92 | -41.04 | -46.79 | | 28.12 | T3 | |
| | CH.40185 2549.5 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 0.42 | -27.85 | -47.00 | 1.33 | 28.27 | T3 | |
| | | | | | y(Transversal) | -8.03 | -36.07 | -46.79 | | 28.04 | T3 | |
| | CH.41055 2636.5 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 2.63 | -25.76 | -47.00 | 1.63 | 28.39 | T3 | |
| | | | | | y(Transversal) | -9.90 | -39.31 | -46.79 | | 29.41 | T3 | |
| CH.41490 2680 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 2.63 | -25.72 | -47.00 | 2.00 | 28.35 | T3 | | |
| | | | | y(Transversal) | -5.63 | -31.68 | -46.79 | | 26.05 | T3 | | |

12.4 VoWi-Fi Codec Investigation

An investigation between the various codec configurations (Low/High bit rates for Narrowband, Wideband) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed for each Wi-Fi 2.4 GHz and 5 GHz.

The highlighted results below were determined to be the worst case codec configuration(s) for Wi-Fi 2.4 GHz and 5 GHz.

| Codec Investigation | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|---|
| Codec State | AMR-NB (kbit/s) | | | AMR-WB (kbit/s) | | | Orientation | Band/ Bandwidth/ Channel |
| | 4.75 | 7.4 | 12.2 | 6.6 | 15.85 | 23.85 | | |
| ABM1 (dB/m) | 8.56 | 9.11 | 3.60 | -2.76 | 4.45 | 4.74 | z (Axial) | 802.11b CH.6 2437 MHz DSSS 1 Mbps |
| ABM2 (dBA/m) | -23.40 | -23.12 | -28.30 | -32.16 | -25.94 | -25.57 | | |
| S+N/N (dB) | 31.96 | 32.22 | 31.90 | 29.40 | 30.39 | 30.32 | | |
| Freq. Resposne(dB) | 1.91 | 1.74 | 1.77 | 2.00 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | -4.12 | -5.52 | 0.45 | -6.11 | -0.67 | -0.70 | y (Transversal) | |
| ABM2 (dBA/m) | -35.85 | -37.37 | -31.30 | -34.97 | -30.86 | -30.78 | | |
| S+N/N (dB) | 31.74 | 31.84 | 31.76 | 28.86 | 30.18 | 30.08 | | |

| Codec Investigation | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|---|
| Codec State | EVS-NB (kbit/s) | | | EVS-WB (kbit/s) | | | EVS-SWB (kbit/s) | | | Orientation | Band/ BandWidth/ Channel |
| | 5.9 | 13.2 | 24.4 | 5.9 | 13.2 | 24.4 | 9.6 | 16.4 | 24.4 | | |
| ABM1 (dB/m) | -0.66 | 8.47 | 3.87 | 4.30 | 7.82 | -0.02 | -2.15 | 0.27 | -2.20 | z (Axial) | 802.11b CH.6 2437 MHz DSSS 1 Mbps |
| ABM2 (dBA/m) | -30.03 | -23.58 | -28.15 | -24.07 | -23.07 | -31.10 | -28.42 | -26.23 | -28.05 | | |
| S+N/N (dB) | 29.37 | 32.05 | 32.02 | 28.37 | 30.88 | 31.08 | 26.27 | 26.50 | 25.85 | | |
| Freq.Resposne(dB) | 1.34 | 1.66 | 1.59 | 2.00 | 2.00 | 2.00 | 1.56 | 1.74 | 1.78 | | |
| ABM1 (dB/m) | -6.07 | 0.71 | 0.69 | -7.10 | 0.28 | -0.27 | -4.92 | -12.59 | -5.34 | y (Transversal) | |
| ABM2 (dBA/m) | -35.49 | -31.03 | -31.19 | -30.52 | -30.22 | -30.97 | -30.73 | -38.57 | -31.19 | | |
| S+N/N (dB) | 29.42 | 31.75 | 31.88 | 23.42 | 30.50 | 30.70 | 25.81 | 25.98 | 25.86 | | |

| Codec Investigation | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|-----------------|--|
| Codec State | AMR-NB (kbit/s) | | | AMR-WB (kbit/s) | | | Orientation | Band/ Bandwidth/ Channel |
| | 4.75 | 7.4 | 12.2 | 6.6 | 15.85 | 23.85 | | |
| ABM1 (dB/m) | -5.61 | 9.02 | 4.77 | 1.85 | -4.01 | 3.79 | z (Axial) | 802.11a CH.40 5200 MHz BPSK 6 Mbps |
| ABM2 (dBA/m) | -37.18 | -22.93 | -27.33 | -28.25 | -33.82 | -26.72 | | |
| S+N/N (dB) | 31.57 | 31.95 | 32.10 | 30.09 | 29.81 | 30.52 | | |
| Freq. Resposne(dB) | 1.63 | 1.40 | 1.63 | 2.00 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | -9.12 | -10.00 | 2.04 | -7.22 | -12.65 | -1.76 | y (Transversal) | |
| ABM2 (dBA/m) | -38.87 | -41.72 | -29.79 | -36.80 | -40.33 | -31.99 | | |
| S+N/N (dB) | 29.75 | 31.72 | 31.83 | 29.58 | 27.68 | 30.23 | | |

| Codec Investigation | | | | | | | | | | | |
|---------------------|-----------------|--------|--------|-----------------|--------|--------|------------------|--------|--------|-----------------|--|
| Codec State | EVS-NB (kbit/s) | | | EVS-WB (kbit/s) | | | EVS-SWB (kbit/s) | | | Orientation | Band/ BandWidth/ Channel |
| | 5.9 | 13.2 | 24.4 | 5.9 | 13.2 | 24.4 | 9.6 | 16.4 | 24.4 | | |
| ABM1 (dB/m) | -7.95 | 9.03 | 2.77 | 2.29 | 1.06 | 8.53 | -6.18 | -4.69 | 2.01 | z (Axial)) | 802.11a CH.40 5200 MHz BPSK 6 Mbps |
| ABM2 (dBA/m) | -38.67 | -22.85 | -29.50 | -25.82 | -30.41 | -22.73 | -34.93 | -34.20 | -25.10 | | |
| S+N/N (dB) | 30.73 | 31.88 | 32.27 | 28.11 | 31.47 | 31.26 | 28.75 | 29.51 | 27.11 | | |
| Freq.Resposne(dB) | 1.48 | 1.64 | 1.58 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | -11.78 | -5.17 | -1.35 | -3.94 | 0.08 | -4.30 | -16.04 | -6.73 | -8.01 | y (Transversal) | |
| ABM2 (dBA/m) | -40.33 | -36.75 | -33.29 | -31.33 | -30.95 | -35.09 | -41.38 | -35.75 | -34.97 | | |
| S+N/N (dB) | 28.56 | 31.58 | 31.95 | 27.39 | 31.03 | 30.79 | 25.34 | 29.02 | 26.96 | | |

12.5 VoWi-Fi Antennas Investigation

EVS-WB 5.9 kbit/s was the worst case bit-rates for 802.11b and 802.11a. The secondary antenna was investigated to determine which antennas yields a worse SNNR. The worst case codec and bit-rate from Antenna 1 was used to determine Antenna 2's exclusion. Since Antenna 2 yielded a better SNNR than Antenna 1, all subsequent measurements were measured using Antenna 1.

| Antenna | Mode | Ch. Freq. | BW | BW /Modulation | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T- Rating |
|----------------|---|------------------|--------|----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|-----------|
| WiFi Ant 1 | 802.11b Voice EVS-WB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | DSSS 1 Mbps | z(Axial) | 4.30 | -24.07 | -55.13 | 2 | 28.37 | T3 |
| | | | | | y(Transversal) | -7.10 | -30.52 | -55.71 | | 23.42 | T3 |
| z(Axial) | | | | | 6.17 | -19.23 | -55.13 | 2 | 25.41 | T3 | |
| y(Transversal) | | | | | 0.58 | -24.80 | -55.71 | | 25.38 | T3 | |

12.6 VoWi-Fi Air Interface Investigation

Using the data from §9.4, further testing was performed on the remaining 802.11 modes. The objective of these measurements is to ensure that changing the modulation, bandwidth, and data rate, whilst using the worst case codec configuration measured in §9.4, yields no unexpected variations.

| Moe | Ch. Freq. | BW | BW/ Modulation | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|-------------------|--------|-----------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11b Voice EVS-WB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | DSSS 1 Mbps | z(Axial) | 4.30 | -24.07 | -55.13 | 2.00 | 28.37 | T3 | 64/65 |
| | | | | y(Transversal) | -7.10 | -30.52 | -55.71 | | 23.42 | T3 | 66 |
| | | | CCK 5.5 Mbps | z(Axial) | -4.65 | -28.88 | -55.13 | 2.00 | 24.23 | T3 | |
| | | | | y(Transversal) | -6.79 | -30.75 | -55.71 | | 23.96 | T3 | |
| | CCK 11 Mbps | | z(Axial) | 4.01 | -20.47 | -55.13 | 2.00 | 24.48 | T3 | | |
| | | | y(Transversal) | 1.62 | -23.35 | -55.71 | | 24.97 | T3 | | |
| | CH.1 2412 MHz | | DSSS 1 Mbps | z(Axial) | 6.88 | -18.04 | -55.13 | 2.00 | 24.92 | T3 | |
| | | | | y(Transversal) | 0.11 | -24.72 | -55.71 | | 24.83 | T3 | |
| | CH.11 2462 MHz | | DSSS 1 Mbps | z(Axial) | 4.33 | -21.37 | -55.13 | 2.00 | 25.70 | T3 | |
| | | | | y(Transversal) | -0.37 | -25.48 | -55.71 | | 25.11 | T3 | |
| 802.11g Voice EVS-WB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | BPSK 6 Mbps | z(Axial) | 1.34 | -24.70 | -55.13 | 2.00 | 26.03 | T3 | |
| | | | | y(Transversal) | -0.27 | -25.85 | -55.71 | | 25.58 | T3 | |
| 802.11n HT20 Voice EVS-WB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | 16QAM MCS 3 | z(Axial) | 3.75 | -21.28 | -55.13 | 2.00 | 25.02 | T3 | |
| | | | | y(Transversal) | -6.58 | -31.43 | -55.71 | | 24.85 | T3 | |
| 802.11ax HE20 Voice EVS-WB Codec: 5.9 kbit/s | CH.6 2437 MHz | 20 MHz | BPSK MCS 0 | z(Axial) | -7.55 | -31.56 | -55.13 | 2.00 | 24.01 | T3 | |
| | | | | y(Transversal) | 1.68 | -23.21 | -55.71 | | 24.89 | T3 | |

VoWi-Fi Air Interface Investigation (Continued)

| Mode | Ch. Freq. | BW | BW /Modulation | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|--|-------------------|--------|--------------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11a Voice EVS-SWB Codec: 9.6kbit/s | CH.40 5200 MHz | 20 MHz | BPSK 6 Mbps | z(Axial) | -6.18 | -34.93 | -55.44 | 2.00 | 28.75 | T3 | |
| | | | | y(Transversal) | -16.04 | -41.38 | -55.83 | | 25.34 | T3 | |
| | | | QPSK 18 Mbps | z(Axial) | -0.98 | -27.72 | -55.44 | 1.62 | 26.74 | T3 | |
| | | | | y(Transversal) | -1.94 | -27.39 | -55.83 | | 25.46 | T3 | |
| 64QAM 54 Mbps | z(Axial) | -0.94 | -27.72 | -55.44 | 1.55 | 26.78 | T3 | | | | |
| | y(Transversal) | -9.89 | -35.29 | -55.83 | | 25.40 | T3 | | | | |
| 802.11n HT20 Voice EVS-SWB Codec: 9.6kbit/s | CH.40 5200 MHz | 20 MHz | MCS 0 6.5 Mbps | z(Axial) | 4.91 | -21.72 | -55.44 | 1.50 | 26.63 | T3 | |
| | | | | y(Transversal) | -4.64 | -30.15 | -55.83 | | 25.51 | T3 | |
| | | | MCS 3 26 Mbps | z(Axial) | 4.81 | -21.78 | -55.44 | 1.56 | 26.59 | T3 | 67/68 |
| | | | | y(Transversal) | -9.53 | -34.86 | -55.83 | | 25.33 | T3 | 69 |
| MCS 7 65 Mbps | z(Axial) | 4.84 | -21.80 | -55.44 | 1.59 | 26.64 | T3 | | | | |
| | y(Transversal) | -1.40 | -26.85 | -55.83 | | 25.46 | T3 | | | | |
| 802.11n HT40 Voice EVS-SWB Codec: 9.6kbit/s | CH.38 5190 MHz | 40 MHz | MCS 0 13.5 Mbps | z(Axial) | 6.12 | -19.53 | -55.44 | 1.68 | 25.65 | T3 | |
| | | | | y(Transversal) | -7.90 | 33.43 | -55.83 | | 25.52 | T3 | |
| | | | MCS 3 54 Mbps | z(Axial) | 4.75 | -21.91 | -55.44 | 1.54 | 26.65 | T3 | |
| | | | | y(Transversal) | -4.71 | -30.17 | -55.83 | | 25.46 | T3 | |
| MCS 7 135 Mbps | z(Axial) | 4.94 | -21.92 | -55.44 | 1.50 | 26.86 | T3 | | | | |
| | y(Transversal) | -1.35 | -26.84 | -55.83 | | 25.49 | T3 | | | | |
| 802.11ac VHT20 Voice EVS-SWB Codec: 9.6kbit/s | CH.40 5200 MHz | 20 MHz | MCS 0 6.5 Mbps | z(Axial) | 2.38 | -27.70 | -55.44 | 1.48 | 30.08 | T4 | |
| | | | | y(Transversal) | -5.48 | -37.05 | -55.83 | | 31.57 | T4 | |
| | | | MCS 4 39 Mbps | z(Axial) | -1.46 | -31.54 | -55.44 | 1.58 | 30.08 | T4 | |
| | | | | y(Transversal) | -9.60 | -37.99 | -55.83 | | 28.39 | T3 | |
| MCS 8 78 Mbps | z(Axial) | 2.73 | -27.63 | -55.44 | 1.64 | 30.36 | T4 | | | | |
| | y(Transversal) | -5.24 | -34.58 | -55.83 | | 29.34 | T3 | | | | |
| 802.11ac VHT40 Voice EVS-SWB Codec: 9.6kbit/s | CH.38 5190 MHz | 40 MHz | MCS 0 13.5 Mbps | z(Axial) | -0.39 | -30.31 | -55.44 | 1.59 | 29.92 | T3 | |
| | | | | y(Transversal) | -7.67 | -39.23 | -55.83 | | 31.56 | T4 | |
| | | | MCS 4 81 Mbps | z(Axial) | 2.50 | -27.74 | -55.44 | 1.56 | 30.24 | T4 | |
| | | | | y(Transversal) | -9.61 | -40.94 | -55.83 | | 31.33 | T4 | |
| MCS 9 180 Mbps | z(Axial) | 4.16 | -28.43 | -55.44 | 1.59 | 32.59 | T4 | | | | |
| | y(Transversal) | -8.26 | -39.77 | -55.83 | | 31.52 | T4 | | | | |
| 802.11ac VHT80 Voice EVS-SWB Codec: 9.6kbit/s | CH.42 5210 MHz | 80 MHz | MCS 0 29.3 Mbps | z(Axial) | 2.78 | -26.80 | -55.44 | 1.57 | 29.58 | T3 | |
| | | | | y(Transversal) | -9.64 | -38.33 | -55.83 | | 28.69 | T3 | |
| | | | MCS 4 175.5Mbps | z(Axial) | 2.66 | -27.21 | -55.44 | 1.36 | 29.87 | T3 | |
| | | | | y(Transversal) | -12.76 | -41.99 | -55.83 | | 29.23 | T3 | |
| MCS 9 390 Mbps | z(Axial) | 2.81 | -27.31 | -55.44 | 1.65 | 29.94 | T3 | | | | |
| | y(Transversal) | -7.66 | -36.82 | -55.83 | | 29.16 | T3 | | | | |

| Mode | Ch. Freq. | BW | BW /Modulation | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. |
|---|--------------------|--------|---------------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|----------|----------|
| 802.11ax HE20 Voice EVS-SWB Codec: 9.6kbit/s | CH.40 5200 MHz | 20 MHz | MCS 0 8.6 Mbps | z(Axial) | 6.03 | -21.20 | -55.44 | 1.49 | 27.23 | T3 | |
| | | | | y(Transversal) | -3.69 | -29.21 | -55.83 | | 25.52 | T3 | |
| | | | MCS 6 77.4 Mbps | z(Axial) | 3.83 | -23.28 | -55.44 | 1.46 | 27.11 | T3 | |
| | | | | y(Transversal) | -7.07 | -33.10 | -55.83 | | 26.04 | T3 | |
| | | | MCS 11 159.9Mbps | z(Axial) | 2.13 | -25.17 | -55.44 | 1.55 | 27.03 | T3 | |
| | | | | y(Transversal) | -11.87 | -37.63 | -55.83 | | 25.76 | T3 | |
| 802.11ax HE40 Voice EVS-SWB Codec: 9.6kbit/s | CH.38 5190 MHz | 40 MHz | MCS 0 17.2 Mbps | z(Axial) | 5.32 | -21.27 | -55.44 | 1.58 | 26.59 | T3 | |
| | | | | y(Transversal) | -3.03 | -30.77 | -55.83 | | 27.74 | T3 | |
| | | | MCS 6 154.9Mbps | z(Axial) | 4.56 | -22.79 | -55.44 | 1.48 | 27.35 | T3 | |
| | | | | y(Transversal) | -6.49 | -32.41 | -55.83 | | 25.92 | T3 | |
| | | | MCS 11 286.8Mbps | z(Axial) | 2.17 | -24.18 | -55.44 | 1.46 | 26.35 | T3 | |
| | | | | y(Transversal) | -11.09 | -36.88 | -55.83 | | 25.79 | T3 | |
| 802.11ax HE80 Voice EVS-SWB Codec: 9.6kbit/s | CH.42 5210 MHz | 80 MHz | MCS 0 36 Mbps | z(Axial) | 3.82 | -23.69 | -55.44 | 1.65 | 27.51 | T3 | |
| | | | | y(Transversal) | -12.06 | -37.65 | -55.83 | | 25.60 | T3 | |
| | | | MCS 6 324.3Mbps | z(Axial) | 2.02 | -25.36 | -55.44 | 1.48 | 27.38 | T3 | |
| | | | | y(Transversal) | -4.18 | -30.09 | -55.83 | | 25.91 | T3 | |
| | | | MCS 11 600.5Mbps | z(Axial) | 4.51 | -23.04 | -55.44 | 1.54 | 27.55 | T3 | |
| | | | | y(Transversal) | -11.02 | -36.89 | -55.83 | | 25.87 | T3 | |
| 802.11n HT20 Voice EVS -SWB Codec:9.6kbit/s | CH.36 5180 MHz | 20 MHz | MCS 3 26 Mbps | z(Axial) | 3.23 | -24.53 | -55.44 | 1.47 | 27.76 | T3 | 70/71 |
| | | | | y(Transversal) | -2.96 | -29.95 | -55.83 | | 26.98 | T3 | 72 |
| 802.11n HT20 Voice EVS -SWB Codec:9.6kbit/s | CH.48 5240 MHz | 20 MHz | MCS 3 26 Mbps | z(Axial) | 1.93 | -25.63 | -55.44 | 1.52 | 27.57 | T3 | 73/74 |
| | | | | y(Transversal) | -6.82 | -35.58 | -55.83 | | 28.76 | T3 | 75 |
| 802.11n HT20 Voice EVS -SWB Codec:9.6kbit/s | CH.56 5280 MHz | 20 MHz | MCS 3 26 Mbps | z(Axial) | -0.86 | -28.07 | -55.44 | 1.62 | 27.21 | T3 | 76/77 |
| | | | | y(Transversal) | -4.54 | -31.05 | -55.83 | | 26.51 | T3 | 78 |
| 802.11n HT20 Voice EVS -SWB Codec:9.6kbit/s | CH.120 5600 MHz | 20 MHz | MCS 3 26 Mbps | z(Axial) | 3.60 | -24.15 | -55.44 | 1.44 | 27.75 | T3 | 79/80 |
| | | | | y(Transversal) | -1.58 | -28.29 | -55.83 | | 26.70 | T3 | 81 |
| 802.11n HT20 Voice EVS -SWB Codec:9.6kbit/s | CH.157 5785 MHz | 20 MHz | MCS 3 26 Mbps | z(Axial) | -2.09 | -29.88 | -55.44 | 1.58 | 27.79 | T3 | 82/83 |
| | | | | y(Transversal) | -6.03 | -33.36 | -55.83 | | 27.33 | T3 | 84 |

12.7 OTT Codec Investigation

The DUT's nested OTT application supports range of codec bit rate 6 – 64 kbit/s, thus an investigation between the various codec configurations (6/64 as Low/High bit rates) and specific parameters are documented (ABM1, ABM2, S+N/N, frequency response) to determine the worst-case bit rates for each service type.

The table below compares the varying codec configurations.

| Codec Investigation | | | | | | |
|---------------------|-------------------------|--------|--------------|----------------|--|---|
| Codec State | codec bit rate (kbit/s) | | | Orientation | Band/ BandWidth/ Channel | |
| | 6 | 40 | 75 | | | |
| ABM1 (dB/m) | 8.46 | 8.50 | 5.26 | z (Axial) | GSM 850 EDGE 2 slots CH.190 836.6 Mhz | |
| ABM2 (dBA/m) | -25.39 | -26.22 | -30.68 | | | |
| S+N/N (dB) | 33.85 | 34.72 | 35.94 | | | |
| Freq.Resposne (dB) | 2.00 | 2.00 | 2.00 | | | |
| ABM1 (dB/m) | -5.90 | -2.22 | -5.11 | y(Transversal) | | |
| ABM2 (dBA/m) | -36.84 | -37.55 | -38.69 | | | |
| S+N/N (dB) | 30.94 | 35.33 | 33.58 | | | |
| ABM1 (dB/m) | 9.06 | 5.98 | 9.44 | z (Axial) | | W-CDMA Band II HSUPA subtest 1 CH. 9400 1880 Mhz |
| ABM2 (dBA/m) | -42.56 | -42.95 | -41.59 | | | |
| S+N/N (dB) | 51.61 | 48.93 | 51.04 | | | |
| Freq.Resposne (dB) | 2.00 | 2.00 | 1.96 | | | |
| ABM1 (dB/m) | 1.91 | 1.96 | 0.47 | y(Transversal) | | |
| ABM2 (dBA/m) | -42.94 | -43.57 | -45.06 | | | |
| S+N/N (dB) | 44.85 | 45.53 | 45.53 | | | |
| ABM1 (dB/m) | 9.14 | 9.13 | 9.23 | z (Axial) | LTE Band 25 20 Mhz QPSK RB 50/49 CH.26365 1882.5 Mhz | |
| ABM2 (dBA/m) | -42.76 | -42.41 | -42.22 | | | |
| S+N/N (dB) | 51.89 | 51.54 | 51.45 | | | |
| Freq.Resposne (dB) | 2.00 | 2.00 | 2.00 | | | |
| ABM1 (dB/m) | 1.37 | 1.85 | 2.01 | y(Transversal) | | |
| ABM2 (dBA/m) | -43.10 | -42.46 | -42.20 | | | |
| S+N/N (dB) | 44.47 | 44.30 | 44.21 | | | |

| Codec Investigation | | | | | |
|---------------------|-------------------------|--------------|--------------|----------------|--|
| Codec State | codec bit rate (kbit/s) | | | Orientation | Band/ BandWidth/ Channel |
| | 6 | 40 | 75 | | |
| ABM1 (dB/m) | 8.92 | 9.07 | 9.53 | z (Axial) | LTE Band 41 20 MHz QPSK RB 100/0 CH.40620 2593 MHz |
| ABM2 (dBA/m) | -30.35 | -31.12 | -30.93 | | |
| S+N/N (dB) | 39.27 | 40.19 | 40.47 | | |
| Freq.Resposne (dB) | 2.00 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | 0.25 | 0.37 | 0.55 | y(Transversal) | |
| ABM2 (dBA/m) | -37.82 | -37.76 | -37.65 | | |
| S+N/N (dB) | 38.07 | 38.13 | 38.20 | | |
| ABM1 (dB/m) | 8.04 | 8.09 | 8.25 | z (Axial) | |
| ABM2 (dBA/m) | -44.85 | -42.46 | -43.37 | | |
| S+N/N (dB) | 52.89 | 50.56 | 51.63 | | |
| Freq.Resposne (dB) | 2.00 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | 1.56 | 1.35 | 1.56 | y(Transversal) | |
| ABM2 (dBA/m) | -45.56 | -44.37 | -44.68 | | |
| S+N/N (dB) | 47.12 | 45.72 | 46.25 | | |
| ABM1 (dB/m) | 10.62 | 10.90 | 7.43 | z (Axial) | 802.11b CH.6 2437 MHz 1Mbps |
| ABM2 (dBA/m) | -36.09 | -36.39 | -39.84 | | |
| S+N/N (dB) | 46.71 | 47.29 | 47.27 | | |
| Freq.Resposne (dB) | 2.00 | 1.98 | 2.00 | | |
| ABM1 (dB/m) | 0.32 | 0.66 | 2.45 | y(Transversal) | |
| ABM2 (dBA/m) | -42.02 | -41.90 | -39.65 | | |
| S+N/N (dB) | 42.34 | 42.55 | 42.10 | | |
| ABM1 (dB/m) | 9.77 | 7.00 | 6.93 | z (Axial) | |
| ABM2 (dBA/m) | -38.18 | -40.59 | -40.77 | | |
| S+N/N (dB) | 47.95 | 47.59 | 47.70 | | |
| Freq.Resposne (dB) | 1.90 | 2.00 | 2.00 | | |
| ABM1 (dB/m) | 0.45 | 1.18 | 1.11 | y(Transversal) | |
| ABM2 (dBA/m) | -39.89 | -40.05 | -40.05 | | |
| S+N/N (dB) | 40.34 | 41.23 | 41.17 | | |

12.8 OTT Air Interface Investigation

| Mode | Ch. Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | T-Rating | Plot No. | | |
|--|------------------------|--------|----------|------------|----------------|----------------|----------------|-----------------------|---------------------|--------------|----------|----------|----------|--|
| GSM850 EDGE 2 slots Duo Codec: 6 kbit/s | CH.128 824.2 MHz | | | | z(Axial) | 7.11 | -22.86 | -46.80 | 2.00 | 29.97 | T3 | 85/ 86 | | |
| | | | | | y(Transversal) | 1.33 | -34.44 | -47.20 | | 35.78 | T4 | 87 | | |
| | CH.190 836.6 MHz | | | | | z(Axial) | 8.46 | -25.39 | -46.80 | 2.00 | 33.85 | T4 | | |
| | | | | | | y(Transversal) | -5.90 | -36.84 | -47.20 | | 30.94 | T4 | | |
| | CH.251 848.8 MHz | | | | | | z(Axial) | 5.56 | -28.68 | -47.20 | 2.00 | 34.24 | T4 | |
| | | | | | | | y(Transversal) | -2.79 | -38.58 | -46.80 | | 35.79 | T4 | |
| GSM1900 EDGE 2 slots Duo Codec: 6 kbit/s | CH.661 1880 MHz | | | | | z(Axial) | 8.34 | -28.42 | -47.20 | 2.00 | 36.76 | T4 | 88/ 89 | |
| | | | | | | y(Transversal) | -0.38 | -35.57 | -46.80 | | 35.19 | T4 | 90 | |
| WCDMA Band II HSUPA subtest1 Duo Codec: 6 kbit/s | CH.9400 1880 MHz | | | | | z(Axial) | 9.06 | -42.56 | -47.20 | 2.00 | 51.61 | T4 | 91/ 92 | |
| | | | | | | y(Transversal) | 1.91 | -42.94 | -46.80 | | 44.85 | T4 | 93 | |
| WCDMA Band IV HSUPA subtest1 Duo Codec: 6 kbit/s | CH.1412 1732.4 MHz | | | | | z(Axial) | 8.99 | -40.89 | -47.20 | 2.00 | 49.88 | T4 | 94/ 95 | |
| | | | | | | y(Transversal) | 2.39 | -43.93 | -46.80 | | 46.33 | T4 | 96 | |
| WCDMA Band V HSUPA subtest1 Duo Codec: 6 kbit/s | CH.4183 836.6 MHz | | | | | z(Axial) | 9.12 | -42.91 | -47.20 | 2.00 | 52.03 | T4 | 97/ 98 | |
| | | | | | | y(Transversal) | 2.14 | -43.79 | -46.80 | | 45.93 | T4 | 99 | |
| LTE Band 7 Google Duo Codec: 75 kbit/s | CH.21100 2535 MHz | 20 MHz | QPSK | 50/49 | | z(Axial) | 9.44 | -42.08 | -47.20 | 2.00 | 51.52 | T4 | 100/ 101 | |
| | | | | | | y(Transversal) | 2.60 | -42.98 | -46.80 | | 45.59 | T4 | 102 | |
| LTE Band 12 Google Duo Codec: 75 kbit/s | CH.23095 707.5 MHz | 10 MHz | QPSK | 25/24 | | z(Axial) | 9.33 | -41.67 | -47.20 | 2.00 | 51.00 | T4 | 103/ 104 | |
| | | | | | | y(Transversal) | 0.82 | -44.75 | -46.80 | | 45.58 | T4 | 105 | |
| LTE Band 13 Google Duo Codec: 75 kbit/s | CH.23230 782 MHz | 10 MHz | QPSK | 25/24 | | z(Axial) | 9.47 | -42.29 | -47.20 | 2.00 | 51.76 | T4 | 106/ 107 | |
| | | | | | | y(Transversal) | 0.81 | -44.63 | -46.80 | | 45.44 | T4 | 108 | |
| LTE Band 14 Google Duo Codec: 75 kbit/s | CH.23330 793 MHz | 10 MHz | QPSK | 25/24 | | z(Axial) | 9.39 | -43.59 | -47.20 | 1.94 | 52.98 | T4 | 109/ 110 | |
| | | | | | | y(Transversal) | 2.35 | -43.06 | -46.80 | | 45.41 | T4 | 111 | |
| LTE Band 25 Google Duo Codec: 75 kbit/s | CH.26365 1882.5 MHz | 20 MHz | QPSK | 50/49 | | z(Axial) | 9.23 | -42.22 | -47.20 | 2.00 | 51.45 | T4 | 112/ 113 | |
| | | | | | | y(Transversal) | 2.01 | -42.20 | -46.80 | | 44.21 | T4 | 114 | |
| LTE Band 26 Google Duo Codec: 75 kbit/s | CH.26865 831.5 MHz | 10 MHz | QPSK | 25/24 | | z(Axial) | 9.40 | -42.53 | -47.20 | 2.00 | 51.93 | T4 | 115/ 116 | |
| | | | | | | y(Transversal) | 0.68 | -44.41 | -46.80 | | 45.08 | T4 | 117 | |
| LTE Band 30 Google Duo Codec: 75 kbit/s | CH.27710 2310 MHz | 10 MHz | QPSK | 25/24 | | z(Axial) | 9.50 | -42.86 | -47.20 | 2.00 | 52.36 | T4 | 118/ 119 | |
| | | | | | | y(Transversal) | 0.61 | -45.04 | -46.80 | | 45.65 | T4 | 120 | |
| LTE Band 66 Google Duo Codec: 75 kbit/s | CH.132322 1745 MHz | 20 MHz | QPSK | 50/49 | | z(Axial) | 9.41 | -42.29 | -47.20 | 1.92 | 51.70 | T4 | 121/ 122 | |
| | | | | | | y(Transversal) | 0.50 | -44.76 | -46.80 | | 45.26 | T4 | 123 | |
| LTE Band 71 Google Duo Codec: 75 kbit/s | CH.133322 683 MHz | 20 MHz | QPSK | 50/49 | | z(Axial) | 9.38 | -42.28 | -47.20 | 1.98 | 51.66 | T4 | 124/ 125 | |
| | | | | | | y(Transversal) | 0.44 | -44.39 | -46.80 | | 44.84 | T4 | 126 | |

| Mode: | Ch./ Freq. | BW/ Data Rate | BW/ Modulation | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR(dB) | T-Rating | Plot No. |
|---|----------------------|---------------|----------------|------------|----------------|--------------|--------------|-----------------------|---------------------|-------------|----------|----------|
| LTE Band 38 Google Duo Codec: 6 kbit/s | CH.38000 2595 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 9.14 | -32.55 | -47.20 | 2.00 | 41.68 | T4 | 127/ 128 |
| | | | | | y(Transversal) | 0.06 | -38.70 | -46.80 | | 38.76 | T4 | 129 |
| LTE Band 40 Google Duo Codec: 6 kbit/s | CH.38750 2310 MHz | 10 MHz | QPSK | 50/0 | z(Axial) | 9.39 | -36.92 | -47.20 | 2.00 | 46.31 | T4 | 130/ 131 |
| | | | | | y(Transversal) | 0.14 | -41.82 | -46.80 | | 41.97 | T4 | 132 |
| LTE Band 40 Google Duo Codec: 6 kbit/s | CH.39200 2355 MHz | 10 MHz | QPSK | 50/0 | z(Axial) | 9.42 | -36.11 | -47.20 | 2.00 | 45.53 | T4 | 133/ 134 |
| | | | | | y(Transversal) | 0.36 | -41.30 | -46.80 | | 41.65 | T4 | 135 |
| LTE Band 41 Google Duo Codec: 6 kbit/s | CH.40620 2593 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 8.92 | -30.35 | -47.20 | 2.00 | 39.27 | T4 | 136/ 137 |
| | | | | | y(Transversal) | 0.25 | -37.82 | -46.80 | | 38.07 | T4 | 138 |
| Wi-Fi 2.4 GHz 802.11b Google Duo Codec: 75 kbit/s | CH.6 2437 MHz | 20 MHz | 1Mbps | | z(Axial) | 7.43 | -39.84 | -47.13 | 2.00 | 47.27 | T4 | 139/ 140 |
| | | | | | y(Transversal) | 2.45 | -39.65 | -46.98 | | 42.10 | T4 | 141 |
| U-NII 5.2 GHz 802.11n HT20 Google Duo Codec: 6 kbit/s | CH.40 5200 MHz | 20 MHz | MCS3 | | z(Axial) | 9.77 | -38.18 | -47.13 | 1.90 | 47.95 | T4 | 142/ 143 |
| | | | | | y(Transversal) | 0.45 | -39.89 | -46.98 | | 40.34 | T4 | 144 |
| U-NII 5.3 GHz 802.11n HT20 Google Duo Codec: 6 kbit/s | CH.56 5280 MHz | 20 MHz | MCS3 | | z(Axial) | 6.79 | -40.80 | -47.13 | 1.97 | 47.59 | T4 | 145/ 146 |
| | | | | | y(Transversal) | 1.09 | -39.66 | -46.98 | | 40.75 | T4 | 147 |
| U-NII 5.6 GHz 802.11n HT20 Google Duo Codec: 6 kbit/s | CH.120 5600 MHz | 20 MHz | MCS3 | | z(Axial) | 7.14 | -40.35 | -47.13 | 2.00 | 47.49 | T4 | 148/ 149 |
| | | | | | y(Transversal) | 0.85 | -39.62 | -46.98 | | 40.47 | T4 | 150 |
| U-NII 5.8 GHz 802.11n HT20 Google Duo Codec: 6 kbit/s | CH.157 5785 MHz | 20 MHz | MCS3 | | z(Axial) | 7.16 | -40.49 | -47.20 | 2.00 | 47.65 | T4 | 151/ 152 |
| | | | | | y(Transversal) | 1.38 | -39.66 | -46.80 | | 41.04 | T4 | 153 |
| EVDO BC0 Rev.A Google Duo Codec: 40 kbit/s | CH.384 836.52 MHz | | | | z(Axial) | 9.59 | -43.31 | -47.13 | 2.00 | 52.90 | T4 | 154/155 |
| | | | | | y(Transversal) | 2.54 | -44.34 | -46.98 | | 46.88 | T4 | 156 |
| EVDO BC1 Rev.A Google Duo Codec: 40 kbit/s | CH.600 1880 MHz | | | | z(Axial) | 9.61 | -44.13 | -47.13 | 2.00 | 53.75 | T4 | 157/158 |
| | | | | | y(Transversal) | 2.88 | -43.71 | -46.98 | | 46.59 | T4 | 159 |
| EVDO BC10 Rev.A Google Duo Codec: 40 kbit/s | CH.450 817.25 MHz | | | | z(Axial) | 8.09 | -42.46 | -47.13 | 2.00 | 50.56 | T4 | 160/161 |
| | | | | | y(Transversal) | 1.35 | -44.37 | -46.98 | | 45.72 | T4 | 162 |

12.9 Radio Configuration for OTT VoIP (NR)

An investigation was performed to determine the waveform, modulation, and RB configuration to be used for testing. Due to equipment limitations, the worst-case ABM1 from OTT VoIP was used with the ABM2 measured for each NR radio configuration. CP-OFDM 16QAM, 1RB, 99%RB offset was determined to be the worst-case configuration for the handset and will be used for full testing. Frequency Response measurements were not possible due to equipment limitations

NR OTT VoIP SNNR by Radio Configuration (CP-OFDM)

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) |
|----------------|------------------------|-----------|-------------|---------------|----------------|-----------------|-----------------|-----------------------------|---------------------------|--------------------|
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/1 | z(Axial) | 9.38 | -46.14 | -50.54 | | 55.52 |
| | | | | | y(Transversal) | 0.44 | -53.35 | -53.85 | | 53.79 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/53 | z(Axial) | 9.38 | -48.98 | -50.54 | | 58.36 |
| | | | | | y(Transversal) | 0.44 | -50.79 | -53.85 | | 51.23 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/104 | z(Axial) | 9.38 | -46.94 | -50.54 | | 56.32 |
| | | | | | y(Transversal) | 0.44 | -50.59 | -53.85 | | 51.03 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 53/0 | z(Axial) | 9.38 | -52.79 | -50.54 | | 62.17 |
| | | | | | y(Transversal) | 0.44 | -52.81 | -53.85 | | 53.25 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 53/26 | z(Axial) | 9.38 | -52.71 | -50.54 | | 62.09 |
| | | | | | y(Transversal) | 0.44 | -51.84 | -53.85 | | 52.28 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 53/53 | z(Axial) | 9.38 | -53.52 | -50.54 | | 62.90 |
| | | | | | y(Transversal) | 0.44 | -53.20 | -53.85 | | 53.64 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 106/0 | z(Axial) | 9.38 | -53.40 | -50.54 | | 62.78 |
| | | | | | y(Transversal) | 0.44 | -52.88 | -53.85 | | 53.32 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/1 | z(Axial) | 9.38 | -43.03 | -50.54 | | 52.41 |
| | | | | | y(Transversal) | 0.44 | -50.81 | -53.85 | | 51.25 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/53 | z(Axial) | 9.38 | -47.36 | -50.54 | | 56.74 |
| | | | | | y(Transversal) | 0.44 | -52.10 | -53.85 | | 52.54 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -40.10 | -50.54 | | 49.48 |
| | | | | | y(Transversal) | 0.44 | -53.50 | -53.85 | | 53.94 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 53/0 | z(Axial) | 9.38 | -53.24 | -50.54 | | 62.62 |
| | | | | | y(Transversal) | 0.44 | -52.78 | -53.85 | | 53.22 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 53/26 | z(Axial) | 9.38 | -53.38 | -50.54 | | 62.76 |
| | | | | | y(Transversal) | 0.44 | -52.52 | -53.85 | | 52.96 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 53/53 | z(Axial) | 9.38 | -54.17 | -50.54 | | 63.55 |
| | | | | | y(Transversal) | 0.44 | -53.59 | -53.85 | | 54.03 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 106/0 | z(Axial) | 9.38 | -53.50 | -50.54 | | 62.88 |
| | | | | | y(Transversal) | 0.44 | -53.03 | -53.85 | | 53.47 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/1 | z(Axial) | 9.38 | -47.78 | -50.54 | | 57.16 |
| | | | | | y(Transversal) | 0.44 | -52.45 | -53.85 | | 52.89 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/53 | z(Axial) | 9.38 | -41.85 | -50.54 | | 51.23 |
| | | | | | y(Transversal) | 0.44 | -54.01 | -53.85 | | 54.45 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/104 | z(Axial) | 9.38 | -53.74 | -50.54 | | 63.12 |
| | | | | | y(Transversal) | 0.44 | -54.09 | -53.85 | | 54.53 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 53/0 | z(Axial) | 9.38 | -52.49 | -50.54 | | 61.87 |
| | | | | | y(Transversal) | 0.44 | -52.85 | -53.85 | | 53.29 |

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) |
|----------------|------------------------|-----------|-------------|---------------|----------------|-----------------|-----------------|-----------------------------|---------------------------|--------------------|
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 53/26 | z(Axial) | 9.38 | -51.85 | -50.54 | | 61.23 |
| | | | | | y(Transversal) | 0.44 | -52.99 | -53.85 | | 53.43 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 53/53 | z(Axial) | 9.38 | -52.37 | -50.54 | | 61.75 |
| | | | | | y(Transversal) | 0.44 | -53.20 | -53.85 | | 53.64 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 106/0 | z(Axial) | 9.38 | -52.15 | -50.54 | | 61.53 |
| | | | | | y(Transversal) | 0.44 | -53.27 | -53.85 | | 53.71 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/1 | z(Axial) | 9.38 | -52.49 | -50.54 | | 61.87 |
| | | | | | y(Transversal) | 0.44 | -53.40 | -53.85 | | 53.84 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/53 | z(Axial) | 9.38 | -46.29 | -50.54 | | 55.67 |
| | | | | | y(Transversal) | 0.44 | -51.66 | -53.85 | | 52.10 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/104 | z(Axial) | 9.38 | -52.09 | -50.54 | | 61.47 |
| | | | | | y(Transversal) | 0.44 | -53.16 | -53.85 | | 53.60 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 53/0 | z(Axial) | 9.38 | -52.47 | -50.54 | | 61.85 |
| | | | | | y(Transversal) | 0.44 | -53.53 | -53.85 | | 53.97 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 53/26 | z(Axial) | 9.38 | -53.68 | -50.54 | | 63.06 |
| | | | | | y(Transversal) | 0.44 | -54.16 | -53.85 | | 54.60 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 53/53 | z(Axial) | 9.38 | -52.68 | -50.54 | | 62.06 |
| | | | | | y(Transversal) | 0.44 | -54.18 | -53.85 | | 54.62 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 106/0 | z(Axial) | 9.38 | -52.95 | -50.54 | | 62.33 |
| | | | | | y(Transversal) | 0.44 | -53.17 | -53.85 | | 53.61 |

NR OTT VoIP SNNR by Radio Configuration (DFT-s-OFDM)

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) |
|---------------|---------------------|--------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 1/1 | z(Axial) | 9.38 | -50.71 | -50.54 | | 60.09 |
| | | | | | y(Transversal) | 0.44 | -53.43 | -53.85 | | 53.87 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 1/53 | z(Axial) | 9.38 | -46.23 | -50.54 | | 55.61 |
| | | | | | y(Transversal) | 0.44 | -53.17 | -53.85 | | 53.61 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 1/104 | z(Axial) | 9.38 | -50.35 | -50.54 | | 59.73 |
| | | | | | y(Transversal) | 0.44 | -53.91 | -53.85 | | 54.35 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 50/0 | z(Axial) | 9.38 | -53.10 | -50.54 | | 62.48 |
| | | | | | y(Transversal) | 0.44 | -52.49 | -53.85 | | 52.93 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 50/28 | z(Axial) | 9.38 | -53.24 | -50.54 | | 62.62 |
| | | | | | y(Transversal) | 0.44 | -52.62 | -53.85 | | 53.06 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 50/56 | z(Axial) | 9.38 | -53.18 | -50.54 | | 62.56 |
| | | | | | y(Transversal) | 0.44 | -52.71 | -53.85 | | 53.15 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | BPSK | 100/0 | z(Axial) | 9.38 | -52.94 | -50.54 | | 62.32 |
| | | | | | y(Transversal) | 0.44 | -52.58 | -53.85 | | 53.02 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/1 | z(Axial) | 9.38 | -51.30 | -50.54 | | 60.68 |
| | | | | | y(Transversal) | 0.44 | -51.44 | -53.85 | | 51.88 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/53 | z(Axial) | 9.38 | -52.60 | -50.54 | | 61.98 |
| | | | | | y(Transversal) | 0.44 | -51.85 | -53.85 | | 52.29 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 1/104 | z(Axial) | 9.38 | -52.04 | -50.54 | | 61.42 |
| | | | | | y(Transversal) | 0.44 | -51.75 | -53.85 | | 52.19 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 50/0 | z(Axial) | 9.38 | -53.78 | -50.54 | | 63.16 |
| | | | | | y(Transversal) | 0.44 | -52.87 | -53.85 | | 53.31 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 50/28 | z(Axial) | 9.38 | -53.79 | -50.54 | | 63.17 |
| | | | | | y(Transversal) | 0.44 | -52.97 | -53.85 | | 53.41 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 50/56 | z(Axial) | 9.38 | -53.73 | -50.54 | | 63.11 |
| | | | | | y(Transversal) | 0.44 | -52.71 | -53.85 | | 53.15 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | QPSK | 100/0 | z(Axial) | 9.38 | -52.83 | -50.54 | | 62.21 |
| | | | | | y(Transversal) | 0.44 | -52.63 | -53.85 | | 53.07 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/1 | z(Axial) | 9.38 | -50.45 | -50.54 | | 59.83 |
| | | | | | y(Transversal) | 0.44 | -52.76 | -53.85 | | 53.20 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/53 | z(Axial) | 9.38 | -50.04 | -50.54 | | 59.42 |
| | | | | | y(Transversal) | 0.44 | -51.66 | -53.85 | | 52.10 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -44.95 | -50.54 | | 54.33 |
| | | | | | y(Transversal) | 0.44 | -51.58 | -53.85 | | 52.02 |

| | | | | | | | | | | |
|------------------|------------------------|--------|--------|-------|----------------|------|--------|--------|--|-------|
| n71 DFTs-OFDM | CH.349000 1745 MHz | 20 MHz | 16QAM | 50/0 | z(Axial) | 9.38 | -51.73 | -50.54 | | 61.11 |
| | | | | | y(Transversal) | 0.44 | -52.22 | -53.85 | | 52.66 |
| n71 DFTs-OFDM | CH.349000 1745 MHz | 20 MHz | 16QAM | 50/28 | z(Axial) | 9.38 | -51.3 | -50.54 | | 60.68 |
| | | | | | y(Transversal) | 0.44 | -52.59 | -53.85 | | 53.03 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 50/56 | z(Axial) | 9.38 | -51.60 | -50.54 | | 60.98 |
| | | | | | y(Transversal) | 0.44 | -53.07 | -53.85 | | 53.51 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 100/0 | z(Axial) | 9.38 | -51.63 | -50.54 | | 61.01 |
| | | | | | y(Transversal) | 0.44 | -53.04 | -53.85 | | 53.48 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/1 | z(Axial) | 9.38 | -46.11 | -50.54 | | 55.49 |
| | | | | | y(Transversal) | 0.44 | -51.80 | -53.85 | | 52.24 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/53 | z(Axial) | 9.38 | -43.13 | -50.54 | | 52.51 |
| | | | | | y(Transversal) | 0.44 | -51.96 | -53.85 | | 52.40 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 1/104 | z(Axial) | 9.38 | -46.61 | -50.54 | | 55.99 |
| | | | | | y(Transversal) | 0.44 | -51.98 | -53.85 | | 52.42 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 50/0 | z(Axial) | 9.38 | -51.32 | -50.54 | | 60.70 |
| | | | | | y(Transversal) | 0.44 | -53.11 | -53.85 | | 53.55 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 50/28 | z(Axial) | 9.38 | -53.43 | -50.54 | | 62.81 |
| | | | | | y(Transversal) | 0.44 | -52.77 | -53.85 | | 53.21 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 50/56 | z(Axial) | 9.38 | -53.30 | -50.54 | | 62.68 |
| | | | | | y(Transversal) | 0.44 | -52.66 | -53.85 | | 53.10 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 64QAM | 100/0 | z(Axial) | 9.38 | -52.73 | -50.54 | | 62.11 |
| | | | | | y(Transversal) | 0.44 | -52.78 | -53.85 | | 53.22 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/1 | z(Axial) | 9.38 | -51.09 | -50.54 | | 60.47 |
| | | | | | y(Transversal) | 0.44 | -51.43 | -53.85 | | 51.87 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/53 | z(Axial) | 9.38 | -53.00 | -50.54 | | 62.38 |
| | | | | | y(Transversal) | 0.44 | -52.32 | -53.85 | | 52.76 |
| n77 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 1/104 | z(Axial) | 9.38 | -51.74 | -50.54 | | 61.12 |
| | | | | | y(Transversal) | 0.44 | -51.43 | -53.85 | | 51.87 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 50/0 | z(Axial) | 9.38 | -53.60 | -50.54 | | 62.98 |
| | | | | | y(Transversal) | 0.44 | -52.97 | -53.85 | | 53.41 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 50/28 | z(Axial) | 9.38 | -52.90 | -50.54 | | 62.28 |
| | | | | | y(Transversal) | 0.44 | -52.61 | -53.85 | | 53.05 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 50/56 | z(Axial) | 9.38 | -53.66 | -50.54 | | 63.04 |
| | | | | | y(Transversal) | 0.44 | -53.04 | -53.85 | | 53.48 |
| n71 DFTs-OFDM | CH.136100 680.5 MHz | 20 MHz | 256QAM | 100/0 | z(Axial) | 9.38 | -53.81 | -50.54 | | 63.19 |
| | | | | | y(Transversal) | 0.44 | -52.92 | -53.85 | | 53.36 |

An investigation was performed to determine the worst-case NR band to be used for OTT VoIP testing. NR n71 was used for the testing as the worst-case configuration for the handset. See below table for SNNR comparison between different NR bands

12.9.1 Interim Procedure for evaluation OTT VoIP(NR)

The following procedure is used to evaluate OTT VoIP (NR) given equipment limitations.

- a. This procedure is applicable for OTT VoIP (NR) voice calls that use the same protocol, codec(s), and reference level as OTT VoIP (LTE) (i.e. -20dBm0).
 - b. Establish the ABM1NR value by using the ABM1LTE magnetic intensity for an LTE call using a correlating LTE band through existing procedures and test equipment.
 - c. Establish an ABM2NR value using factory test mode (FTM) to simulate a NR connection for the desired NR band and channel under test.
 - d. The following information is documented in Section 9:
 1. ABM2LTE and ABM2NR for respective tests.
 2. Calculate SNNR:
 - i. $ABM1 = ABM1LTE$
 - ii. $ABM2 = ABM2NR$
 - iii. $SNNRNR = [ABM1LTE - ABM2NR] - 3dB$
- A 3dB margin is built in to ensure conservative results with this interim procedure.

The above is only applicable for OTT VoIP scenarios, this device does not support VoNR over IMS.

The manufacturer has confirmed the handset as designed is expected to exhibit similar audio intensity levels between an OTT VoIP call placed over a 4G LTE and a 5G Sub-6GHz data connection.

OTT VoIP (NR) SNNR by Band

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T-Rating | Plot No. |
|----------------|-------------------------|--------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|--------------------|----------|----------|
| n2 CP-OFDM | CH.376000 1880 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.23 | -42.05 | -50.54 | | 51.28 | 48.28 | T4 | 163 |
| | | | | | y(Transversal) | 2.01 | -53.22 | -53.85 | | 55.23 | 52.23 | T4 | 164 |
| n5 CP-OFDM | CH.167300 836.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.4 | -41.45 | -50.54 | | 50.85 | 47.85 | T4 | 165 |
| | | | | | y(Transversal) | 0.68 | -53.90 | -53.85 | | 54.58 | 51.58 | T4 | 166 |
| n25 CP-OFDM | CH.376500 1882.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.23 | -42.92 | -50.54 | | 52.15 | 49.15 | T4 | 167 |
| | | | | | y(Transversal) | 2.01 | -49.80 | -53.85 | | 51.81 | 48.81 | T4 | 168 |
| n66 CP-OFDM | CH.349000 1745 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.41 | -43.23 | -50.54 | | 52.64 | 49.64 | T4 | 169 |
| | | | | | y(Transversal) | 0.50 | -53.80 | -53.85 | | 54.30 | 51.30 | T4 | 170 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -40.10 | -50.54 | | 49.48 | 46.48 | T4 | 171 |
| | | | | | y(Transversal) | 0.44 | -53.50 | -53.85 | | 53.94 | 50.94 | T4 | 172 |

Raw Data Results for NR n71 (OTT VoIP)

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T-Rating | Plot No. |
|-------------|---------------------|--------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|--------------------|----------|----------|
| n71 CP-OFDM | CH.136100 680.5 MHz | 5 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -44.11 | -50.54 | | 53.49 | 50.49 | T4 | 173 |
| | | | | | y(Transversal) | 0.44 | -53.84 | -53.85 | | 54.28 | 51.28 | T4 | 174 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 10 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -42.60 | -50.54 | | 51.98 | 48.98 | T4 | 175 |
| | | | | | y(Transversal) | 0.44 | -53.56 | -53.85 | | 54.00 | 51.00 | T4 | 176 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 15 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -44.21 | -50.54 | | 53.59 | 50.59 | T4 | 177 |
| | | | | | y(Transversal) | 0.44 | -50.39 | -53.85 | | 50.83 | 47.83 | T4 | 178 |
| n71 CP-OFDM | CH.134600 673 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -52.49 | -50.54 | | 61.87 | 58.87 | T4 | 179 |
| | | | | | y(Transversal) | 0.44 | -54.37 | -53.85 | | 54.81 | 51.81 | T4 | 180 |
| n71 CP-OFDM | CH.136100 680.5 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -40.10 | -50.54 | | 49.48 | 46.48 | T4 | 181 |
| | | | | | y(Transversal) | 0.44 | -53.50 | -53.85 | | 53.94 | 50.94 | T4 | 182 |
| n71 CP-OFDM | CH.137600 688 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 9.38 | -52.41 | -50.54 | | 61.79 | 58.79 | T4 | 183 |
| | | | | | y(Transversal) | 0.44 | -54.31 | -53.85 | | 54.75 | 51.75 | T4 | 184 |

Raw Data Results for NR n41 (OTT VoIP)

| Mode: | Ch./ Freq. | BW | BW/ Mode | RB Config. | Orientation | ABM1 dB(A/m) | ABM2 dB(A/m) | Ambient Noise dB(A/m) | Freq. Response (dB) | ABM SNR (dB) | ABM SNRNR -3dB(dB) | T-Rating | Plot No. |
|-------------|-----------------------|---------|----------|------------|----------------|--------------|--------------|-----------------------|---------------------|--------------|--------------------|----------|----------|
| n41 CP-OFDM | CH.518598 2592.99 MHz | 20 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -52.71 | -50.54 | | 61.63 | 58.63 | T4 | 185 |
| | | | | | y(Transversal) | 0.25 | -54.74 | -53.85 | | 54.99 | 51.99 | T4 | 186 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 40 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -44.71 | -50.54 | | 53.63 | 50.63 | T4 | 187 |
| | | | | | y(Transversal) | 0.25 | -52.84 | -53.85 | | 53.09 | 50.09 | T4 | 188 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 50 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -37.42 | -50.54 | | 46.34 | 43.34 | T4 | 189 |
| | | | | | y(Transversal) | 0.25 | -50.17 | -53.85 | | 50.42 | 47.42 | T4 | 190 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 60 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -37.67 | -50.54 | | 46.59 | 43.59 | T4 | 191 |
| | | | | | y(Transversal) | 0.25 | -50.15 | -53.85 | | 50.40 | 47.40 | T4 | 192 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 80 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -36.51 | -50.54 | | 45.43 | 42.43 | T4 | 193 |
| | | | | | y(Transversal) | 0.25 | -50.55 | -53.85 | | 50.80 | 47.80 | T4 | 194 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 90 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -40.63 | -50.54 | | 49.55 | 46.55 | T4 | 195 |
| | | | | | y(Transversal) | 0.25 | -45.26 | -53.85 | | 45.51 | 42.51 | T4 | 196 |
| n41 CP-OFDM | CH.518598 2592.99 MHz | 100 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -35.93 | -50.54 | | 44.85 | 41.85 | T4 | 197 |
| | | | | | y(Transversal) | 0.25 | -50.70 | -53.85 | | 50.95 | 47.95 | T4 | 198 |
| n41 CP-OFDM | CH.509202 2546.01 MHz | 100 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -44.49 | -50.54 | | 53.41 | 50.41 | T4 | 199 |
| | | | | | y(Transversal) | 0.25 | -47.26 | -53.85 | | 47.51 | 44.51 | T4 | 200 |
| n41 CP-OFDM | CH.513900 2569.5 MHz | 100 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -40.27 | -50.54 | | 49.19 | 46.19 | T4 | 201 |
| | | | | | y(Transversal) | 0.25 | -46.20 | -53.85 | | 46.45 | 43.45 | T4 | 202 |
| n41 CP-OFDM | CH.523302 2616.51 MHz | 100 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -39.91 | -50.54 | | 48.83 | 45.83 | T4 | 203 |
| | | | | | y(Transversal) | 0.25 | -44.54 | -53.85 | | 44.79 | 41.79 | T4 | 204 |
| n41 CP-OFDM | CH.528000 2640 MHz | 100 MHz | 16QAM | 1/104 | z(Axial) | 8.92 | -39.27 | -50.54 | | 48.19 | 45.19 | T4 | 205 |
| | | | | | y(Transversal) | 0.25 | -44.35 | -53.85 | | 44.60 | 41.60 | T4 | 206 |

Attachment 1. HAC T-COIL Test Plots

Plot No.1

GSM850 FR V1 190ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 24.83
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 BWC applied: 0.16 dB
 Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = 9.83 dBA/m
 BWC Factor = 0.16 dB
 Location: 12.5, -4.2, 3.7 mm

Cursor:

ABM2 = -16.99 dBA/m
 Location: 12.5, -4.2, 3.7 mm

Cursor:

ABM1/ABM2 = 26.82 dB
 ABM1 comp = 9.83 dBA/m
 BWC Factor = 0.16 dB
 Location: 12.5, -4.2, 3.7 mm

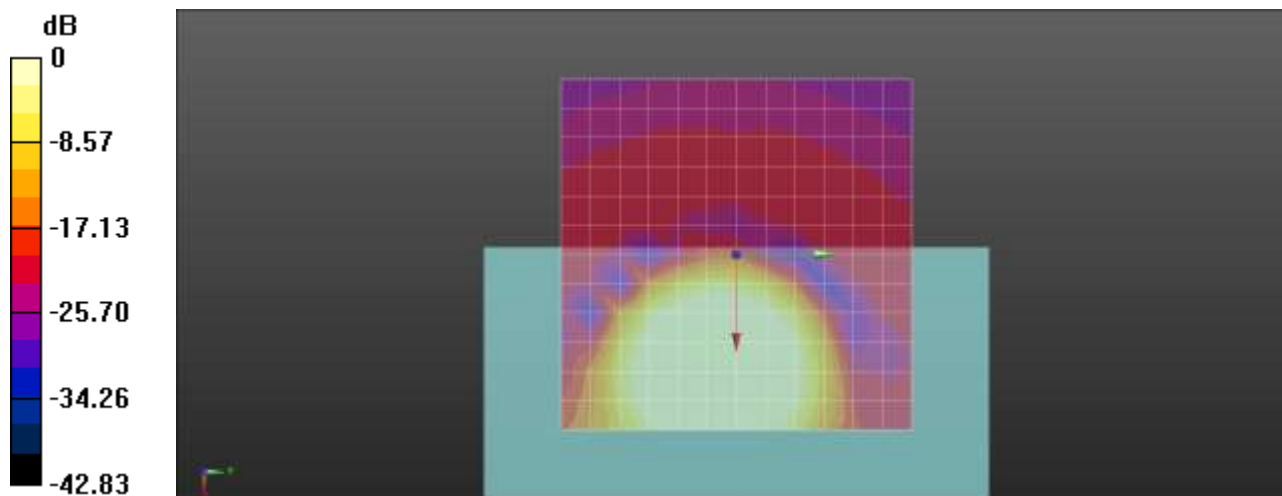

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.2

GSM850 190ch FR V1 190ch Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.61 dB

BWC Factor = 9.48 dB

Location: 13.7, -3.7, 3.7 mm

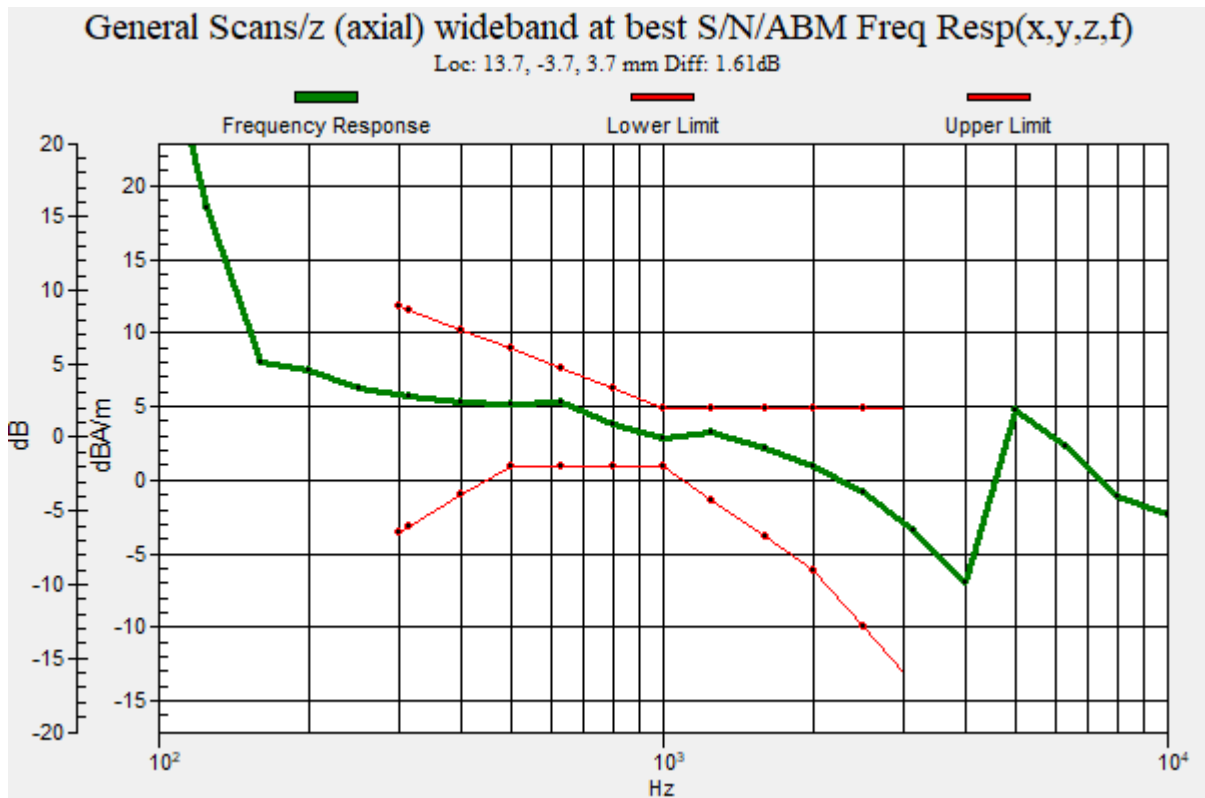

Plot No.3

GSM850 190ch FR V1 190ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:8.30042
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.92 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -12.5, 3.7 mm

Cursor:

ABM2 = -28.87 dBA/m

Location: 12.5, -12.5, 3.7 mm



Cursor:

ABM1/ABM2 = 27.94 dB

ABM1 comp = -0.92 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -12.5, 3.7 mm

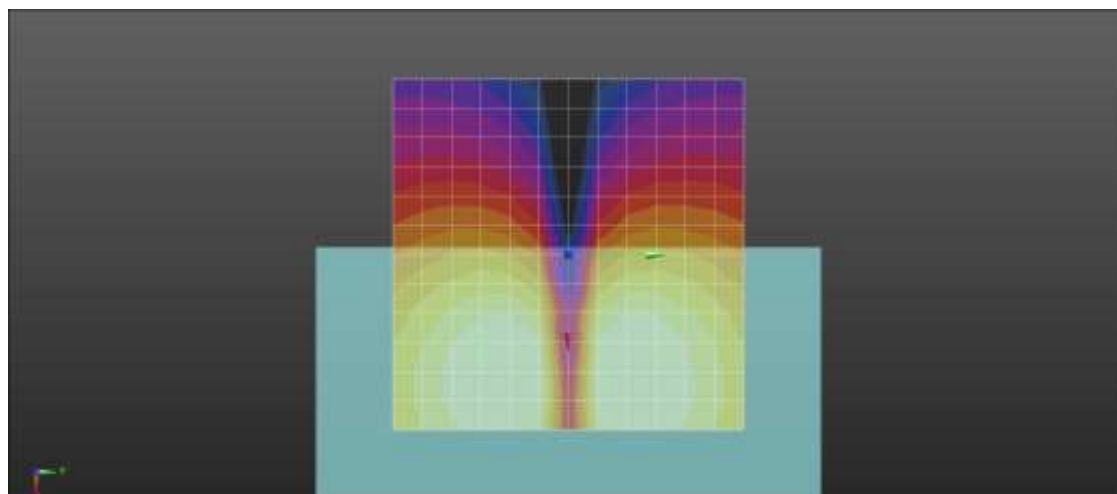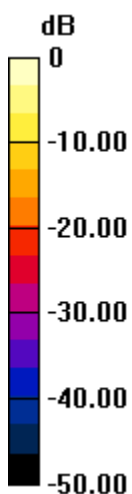

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.4

GSM1900 FR V1 661ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x

50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 6.95 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

Cursor:

ABM2 = -22.90 dBA/m

Location: 12.5, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 29.85 dB

ABM1 comp = 6.95 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

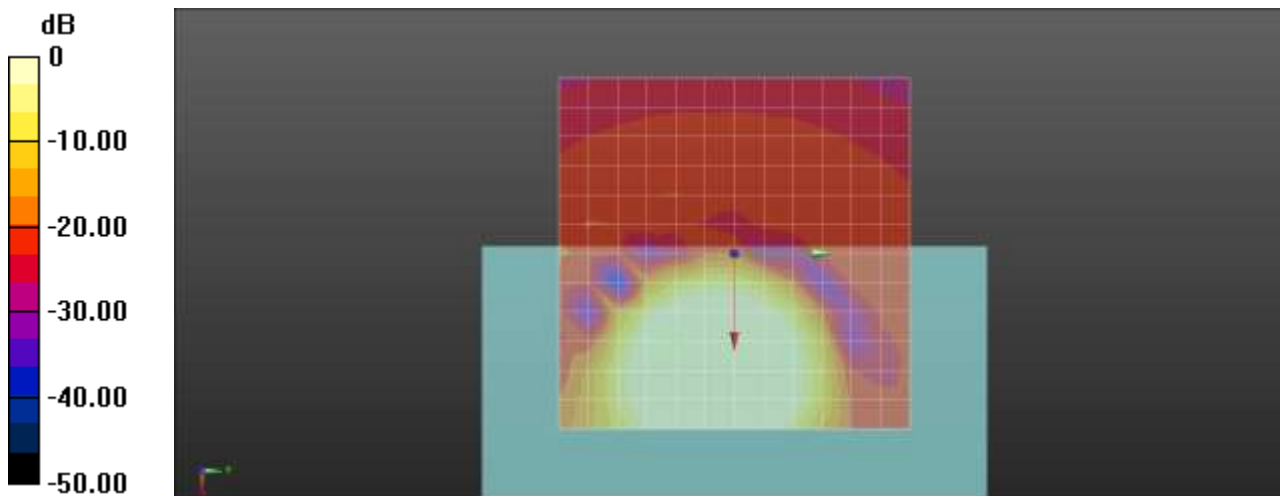

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.5

GSM1900 FR V1 661ch Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.98 dB

BWC Factor = 9.48 dB

Location: 14, -9.5, 3.7 mm

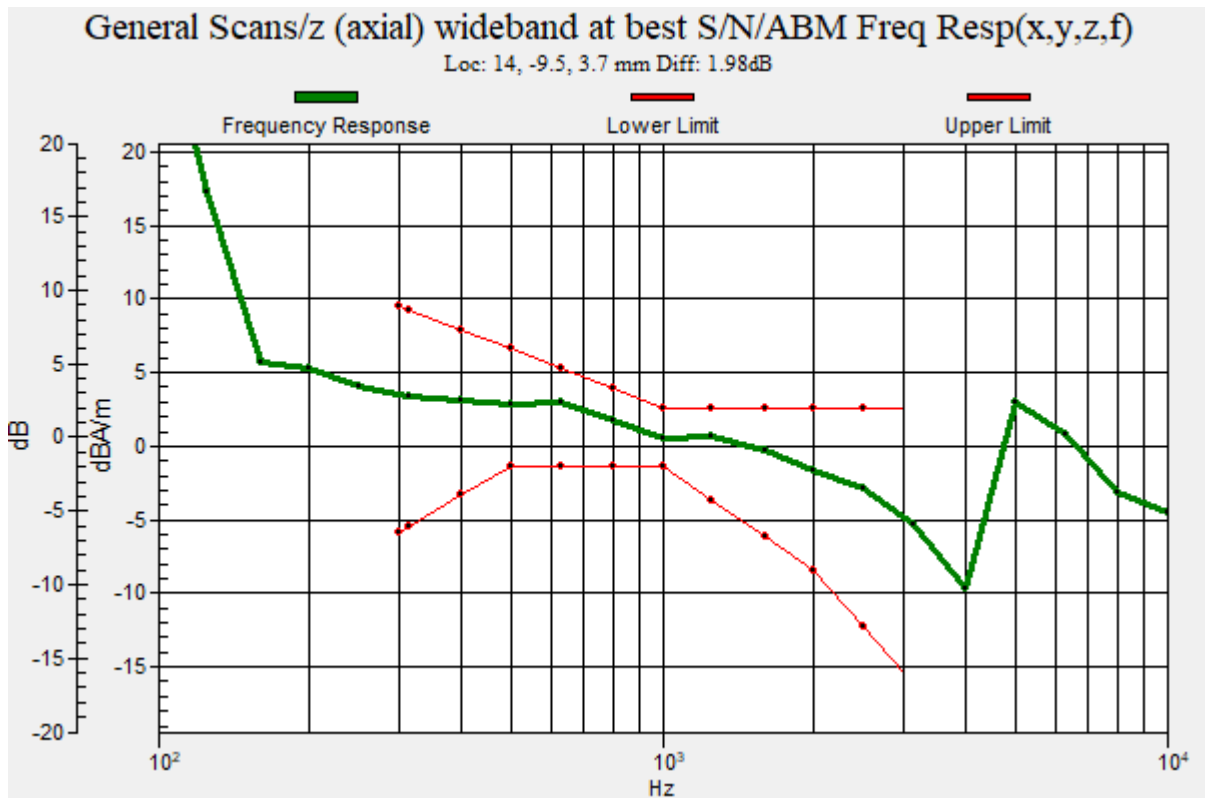

Plot No.6

GSM1900 FR V1 661ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:8.30042
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 24.83
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 BWC applied: 0.16 dB
 Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = -3.15 dBA/m
 BWC Factor = 0.16 dB
 Location: 8.3, -8.3, 3.7 mm

Cursor:

ABM2 = -31.95 dBA/m
 Location: 8.3, -8.3, 3.7 mm

Cursor:

ABM1/ABM2 = 28.80 dB
 ABM1 comp = -3.15 dBA/m
 BWC Factor = 0.16 dB
 Location: 8.3, -8.3, 3.7 mm

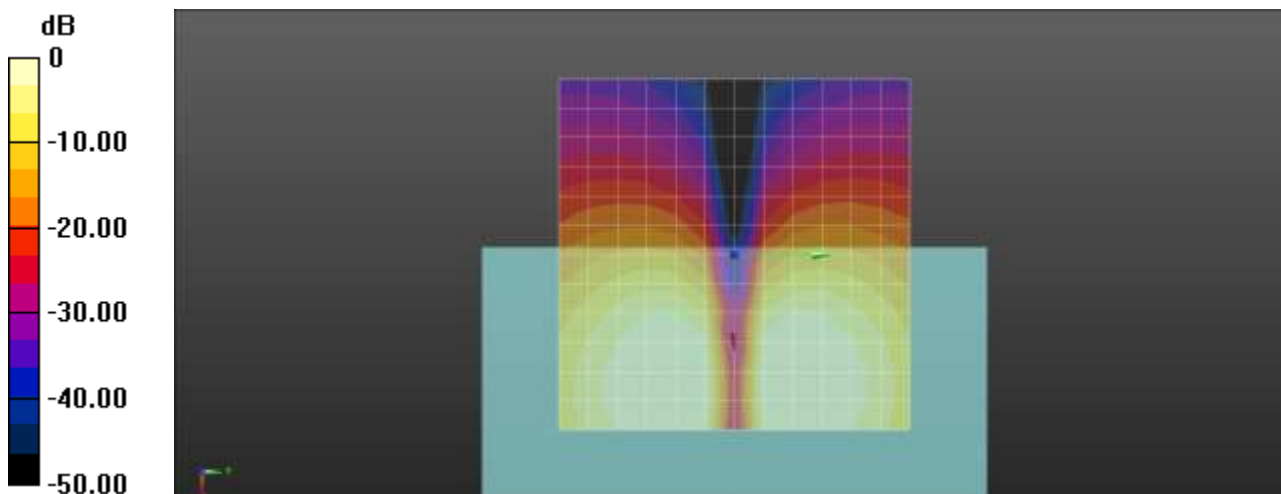

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.7

WCDMA Band 2 9400ch AMR WB 6_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.18 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -6.08 dBA/m

BWC Factor = 0.18 dB

Location: 8.3, -12.5, 3.7 mm

Cursor:

ABM2 = -35.11 dBA/m

Location: 8.3, -12.5, 3.7 mm


Cursor:

ABM1/ABM2 = 29.03 dB

ABM1 comp = -6.08 dBA/m

BWC Factor = 0.18 dB

Location: 8.3, -12.5, 3.7 mm

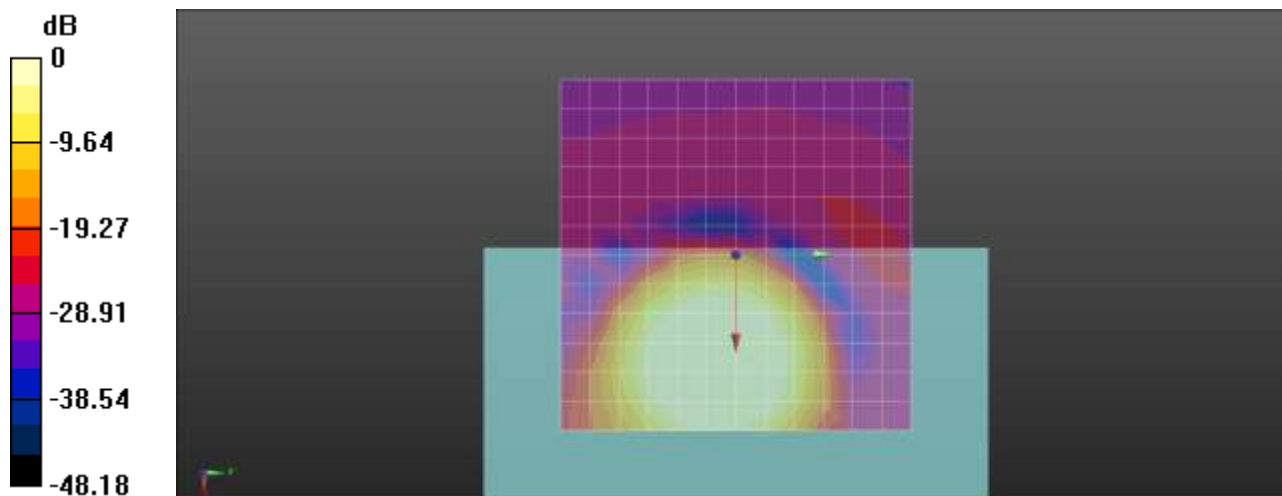

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.8

WCDMA Band 2 9400ch AMR WB 6_6 Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.50 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.14 dB

BWC Factor = 9.50 dB

Location: 8.8, -11.6, 3.7 mm

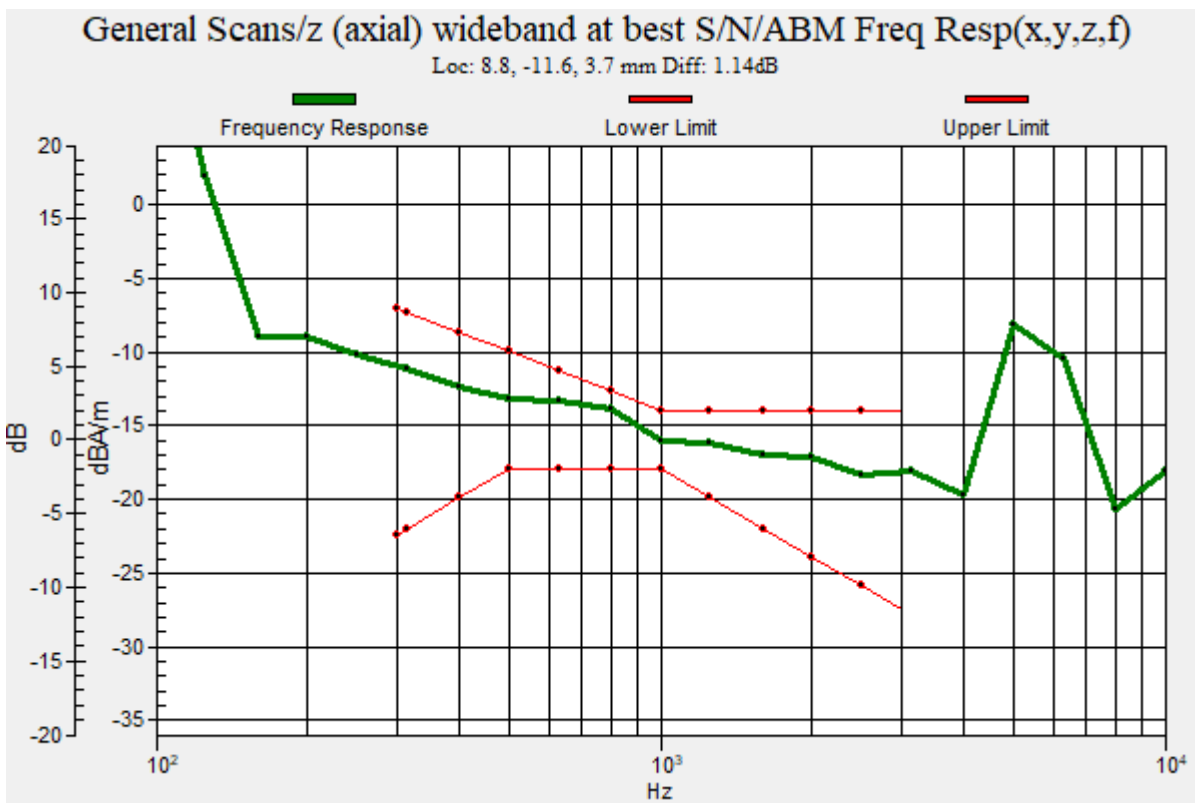

Plot No.9

WCDMA Band 2 9400ch AMR WB 6_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.18 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -2.42 dBA/m

BWC Factor = 0.18 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -30.77 dBA/m

Location: 16.7, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 28.35 dB

ABM1 comp = -2.42 dBA/m

BWC Factor = 0.18 dB

Location: 16.7, 4.2, 3.7 mm

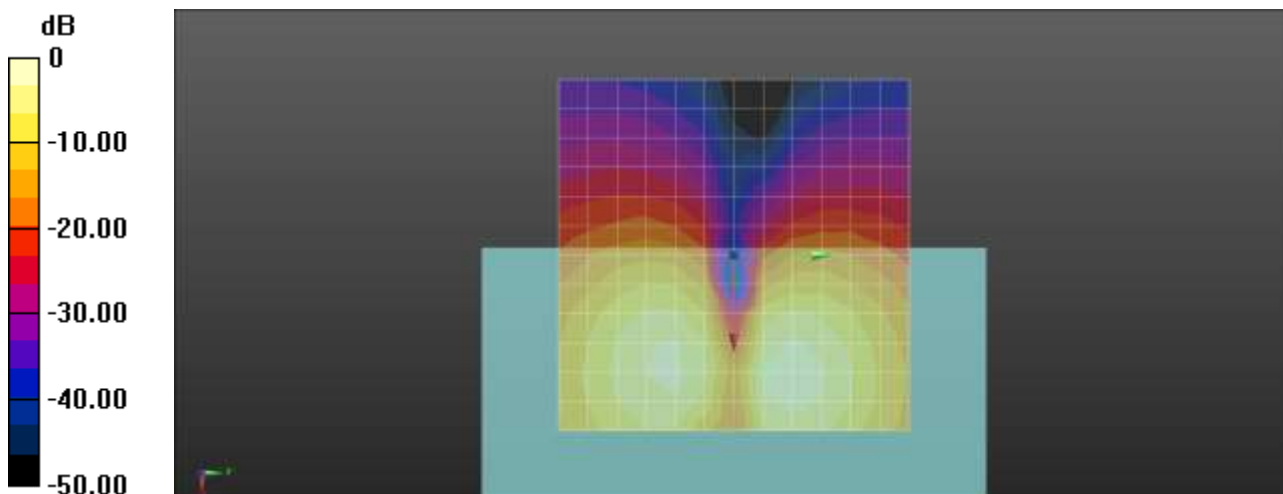

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.10

WCDMA Band 4 1412ch AMR WB 6_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.30 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -4.2, 3.7 mm

Cursor:

ABM2 = -29.61 dBA/m

Location: 8.3, -4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 30.91 dB

ABM1 comp = 1.30 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, -4.2, 3.7 mm

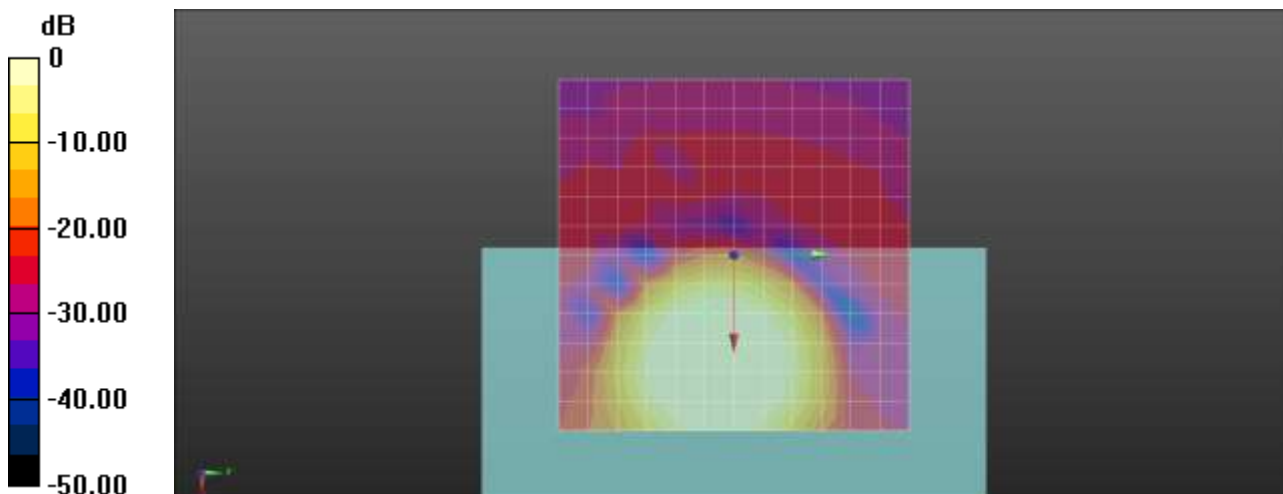

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.11

WCDMA Band 4 1412ch AMR WB 6_6 Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.37 dB

BWC Factor = 9.48 dB

Location: 8.2, -4.1, 3.7 mm

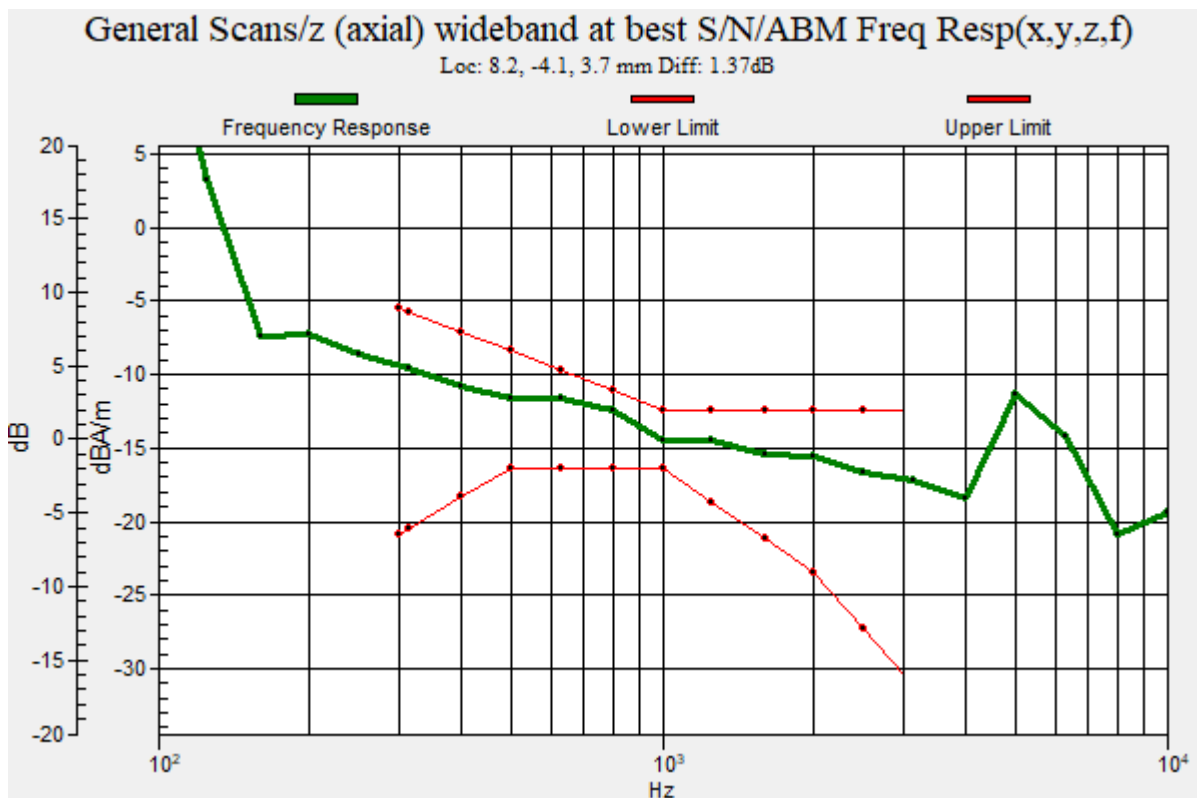

Plot No.12

WCDMA Band 4 1412ch AMR WB 6_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -9.90 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 8.3, 3.7 mm

Cursor:

ABM2 = -38.89 dBA/m

Location: 4.2, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 28.99 dB

ABM1 comp = -9.90 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 8.3, 3.7 mm

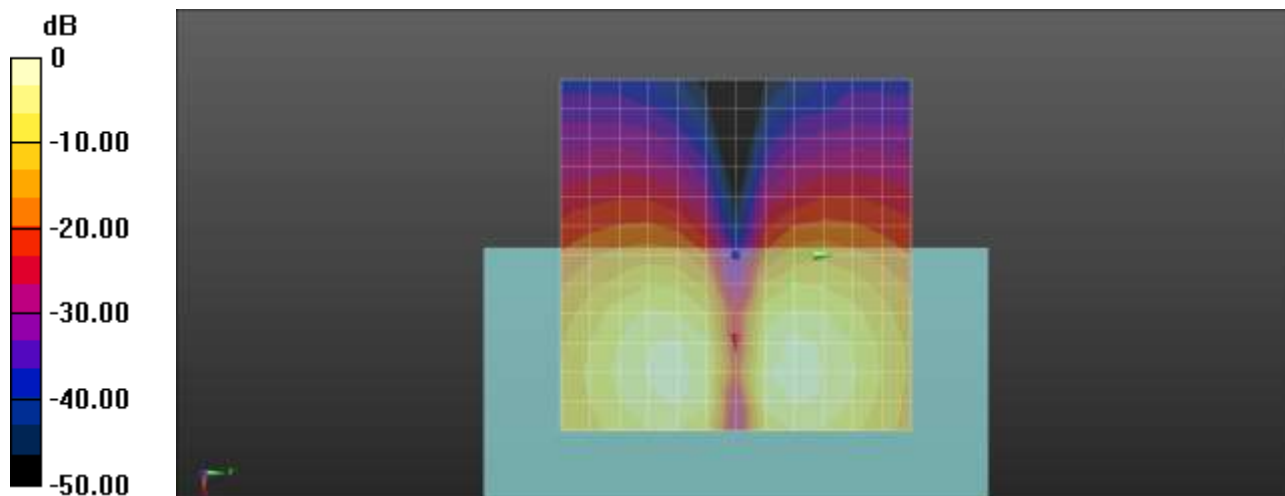

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.13

WCDMA Band 5 4183ch AMR WB 6_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.18 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.49 dBA/m

BWC Factor = 0.18 dB

Location: 12.5, -8.3, 3.7 mm

Cursor:

ABM2 = -27.28 dBA/m

Location: 12.5, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 29.76 dB

ABM1 comp = 2.49 dBA/m

BWC Factor = 0.18 dB

Location: 12.5, -8.3, 3.7 mm

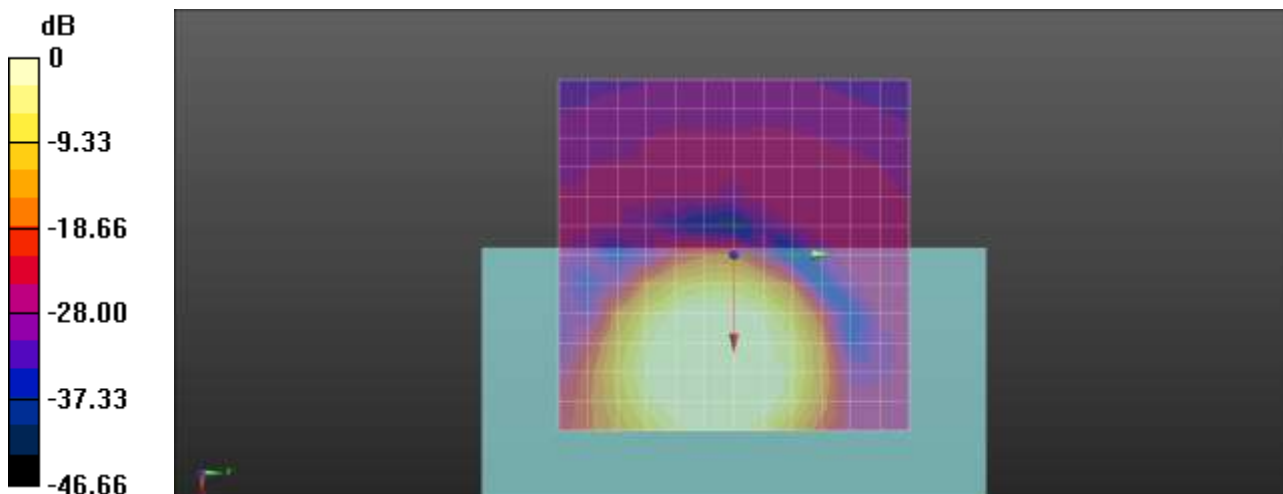

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.14

WCDMA Band 5 4183ch AMR WB 6_6 Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.50 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.19 dB

BWC Factor = 9.50 dB

Location: 12.5, -8.2, 3.7 mm

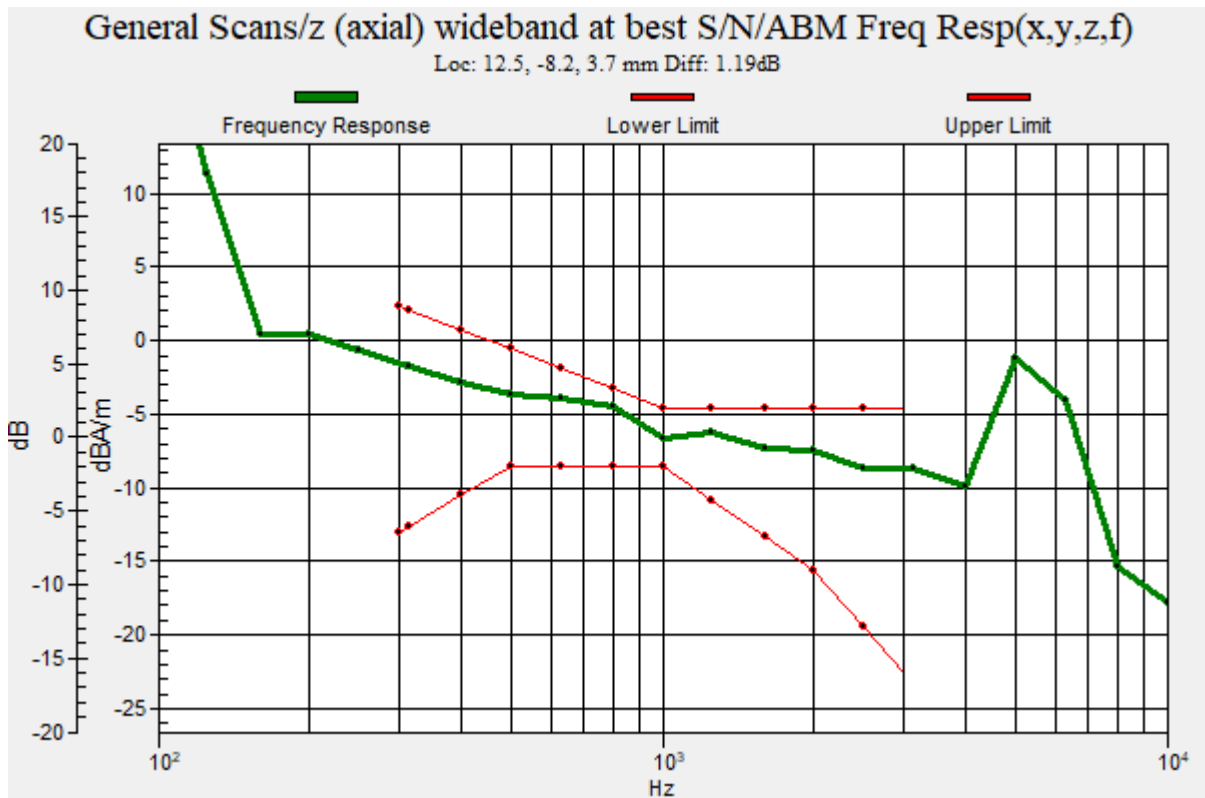

Plot No.15
WCDMA Band 5 4183ch AMR WB 6_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 24.83

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.18 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -12.30 dBA/m

BWC Factor = 0.18 dB

Location: 8.3, -20.8, 3.7 mm

Cursor:

ABM2 = -40.91 dBA/m

Location: 8.3, -20.8, 3.7 mm


Cursor:

ABM1/ABM2 = 28.62 dB

ABM1 comp = -12.30 dBA/m

BWC Factor = 0.18 dB

Location: 8.3, -20.8, 3.7 mm

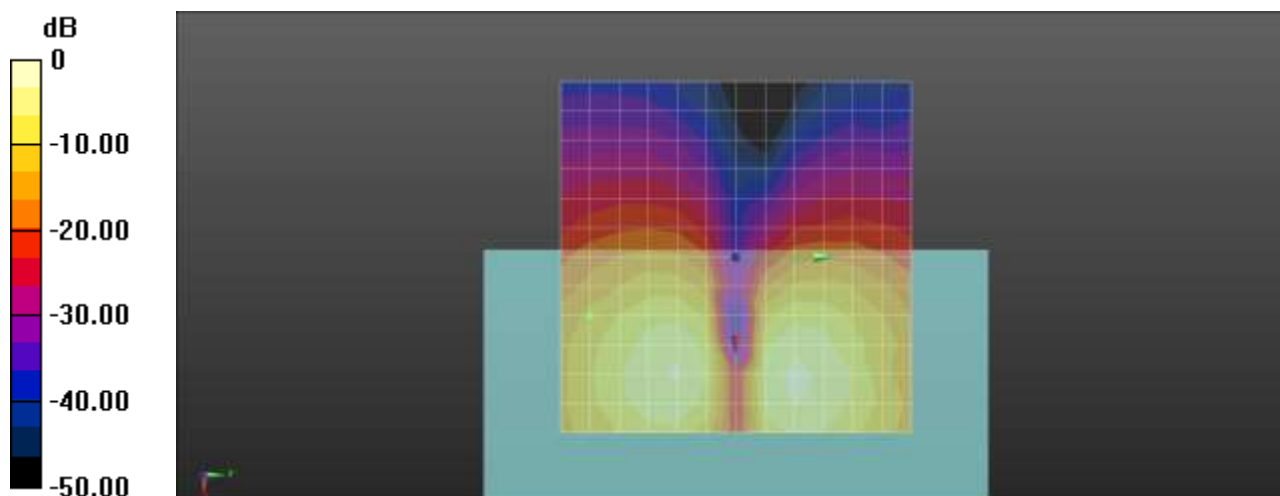

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.16

CDMA BC0 EVRC- B SO68/RC1 384ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 4.99 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -36.83 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 41.82 dB

ABM1 comp = 4.99 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

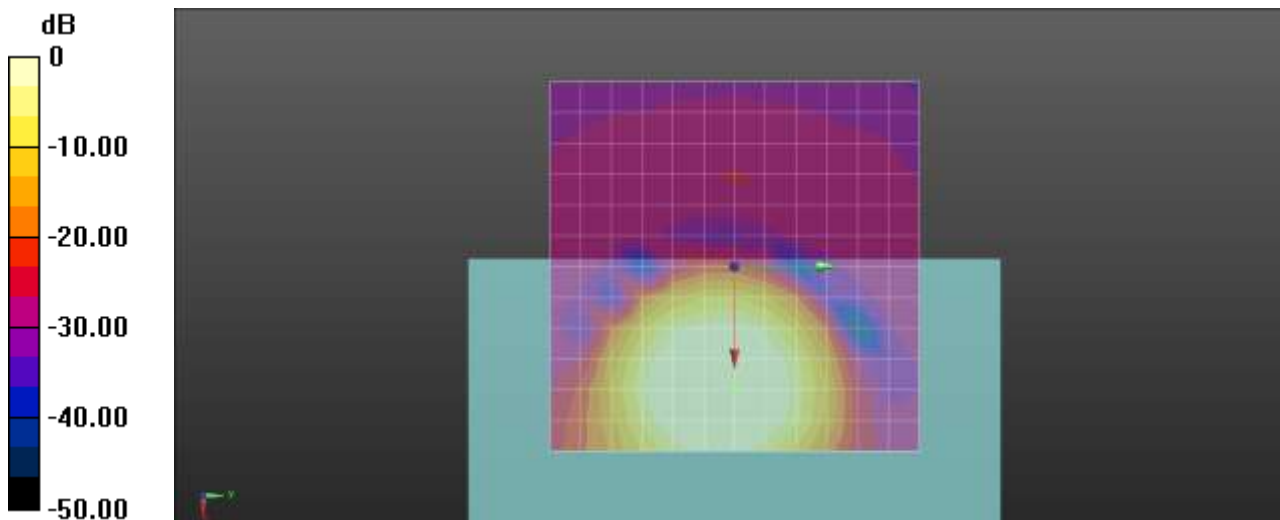

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.17

CDMA BC0 EVRC- B SO68/RC1 384ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.24

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.49 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.27 dB

BWC Factor = 9.49 dB

Location: 15.1, 0, 3.7 mm

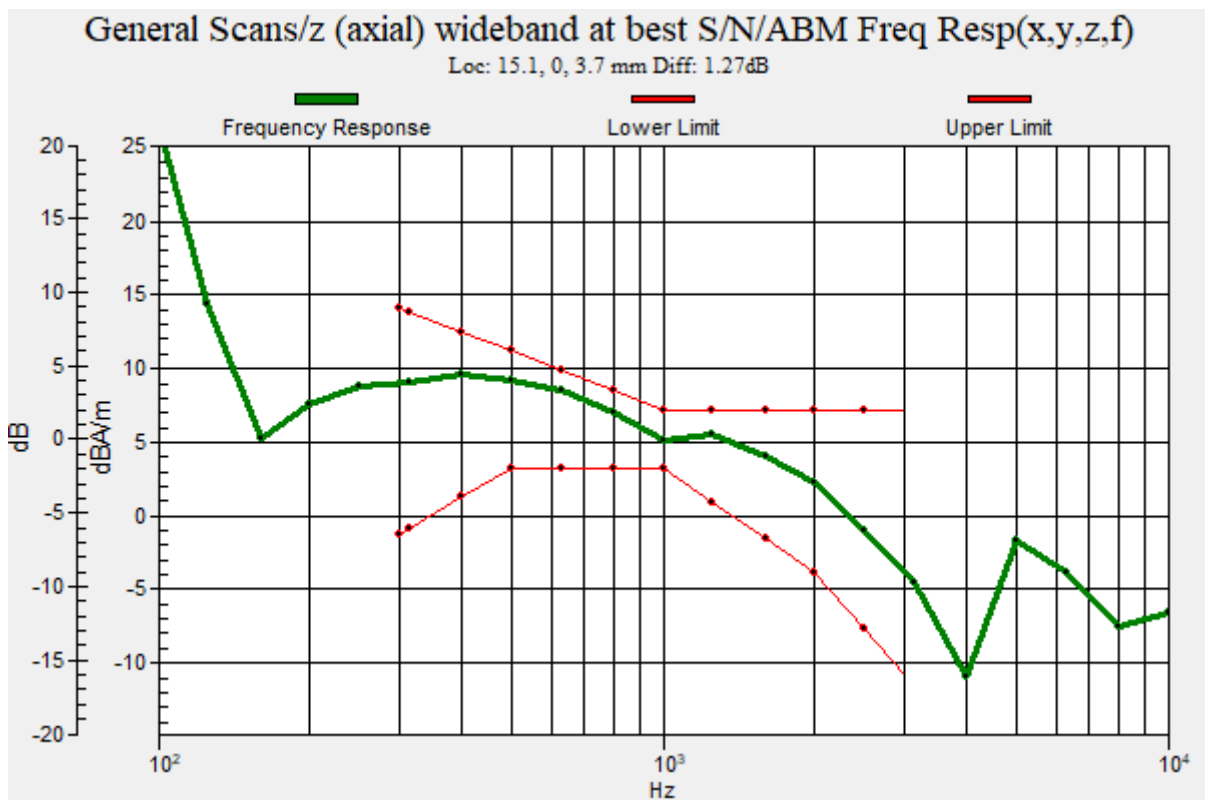

Plot No.18

CDMA BC0 EVRC-B SO68/RC1 384ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -5.09 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -45.76 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 40.67 dB

ABM1 comp = -5.09 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

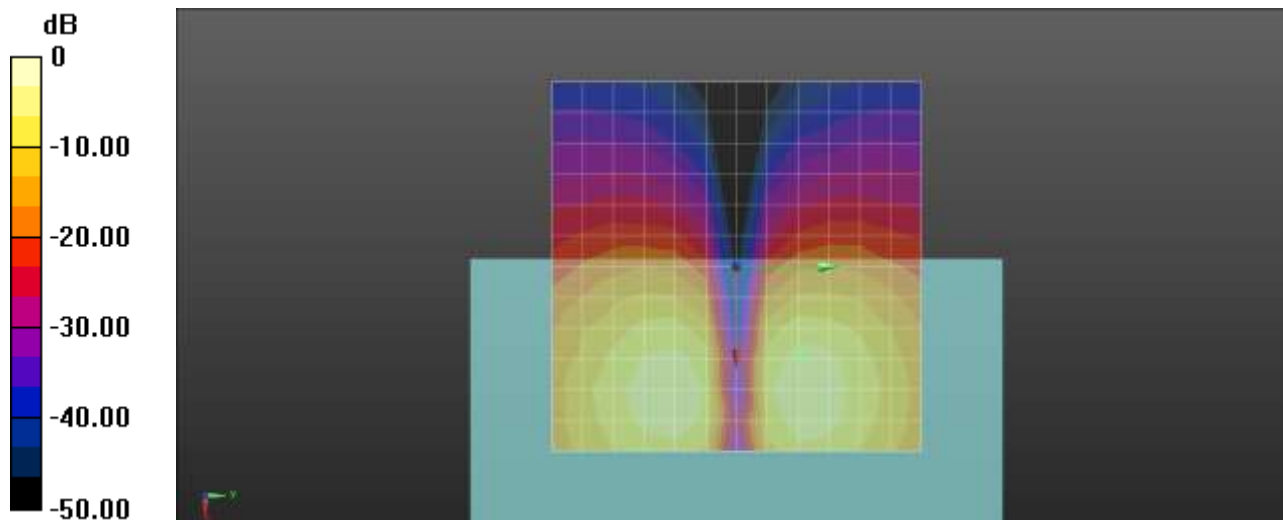

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.19

CDMA BC1 EVRC- B SO68/RC1 600ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 5.94 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -38.91 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 44.85 dB

ABM1 comp = 5.94 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

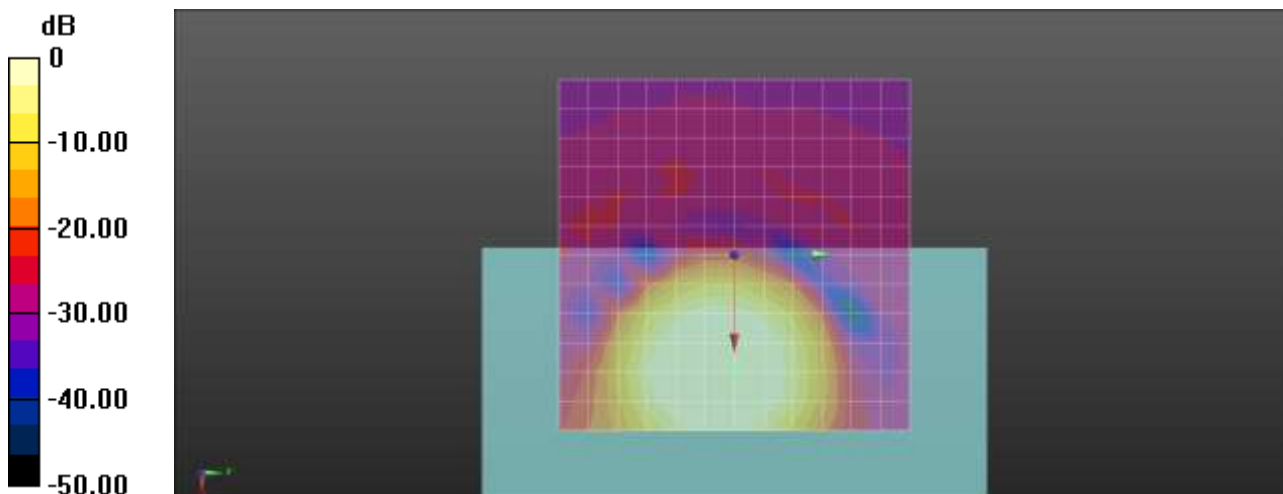

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.20

CDMA BC1 EVRC-B SO68/RC1 600ch Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.24

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.49 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.23 dB

BWC Factor = 9.49 dB

Location: 15.8, 0, 3.7 mm

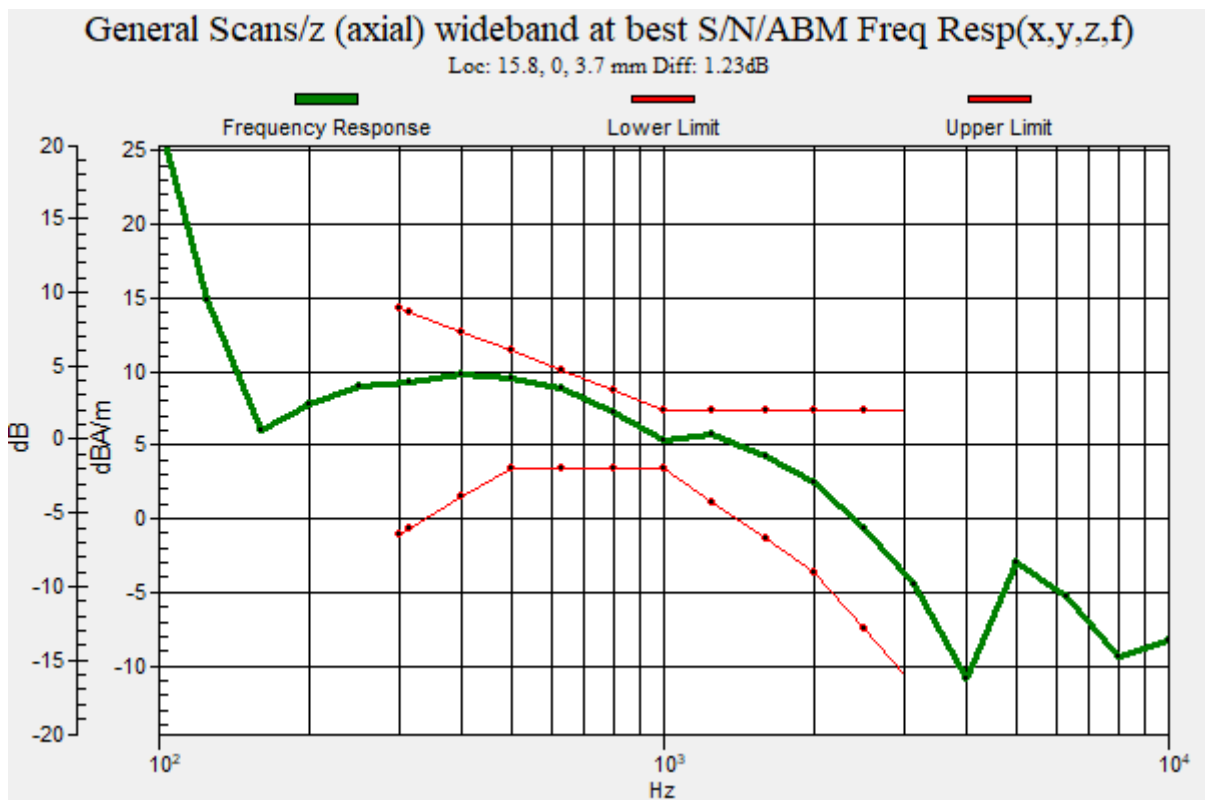

Plot No.21

CDMA BC1 EVRC-B SO68/RC1 600ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -5.10 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -47.84 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 42.74 dB

ABM1 comp = -5.10 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

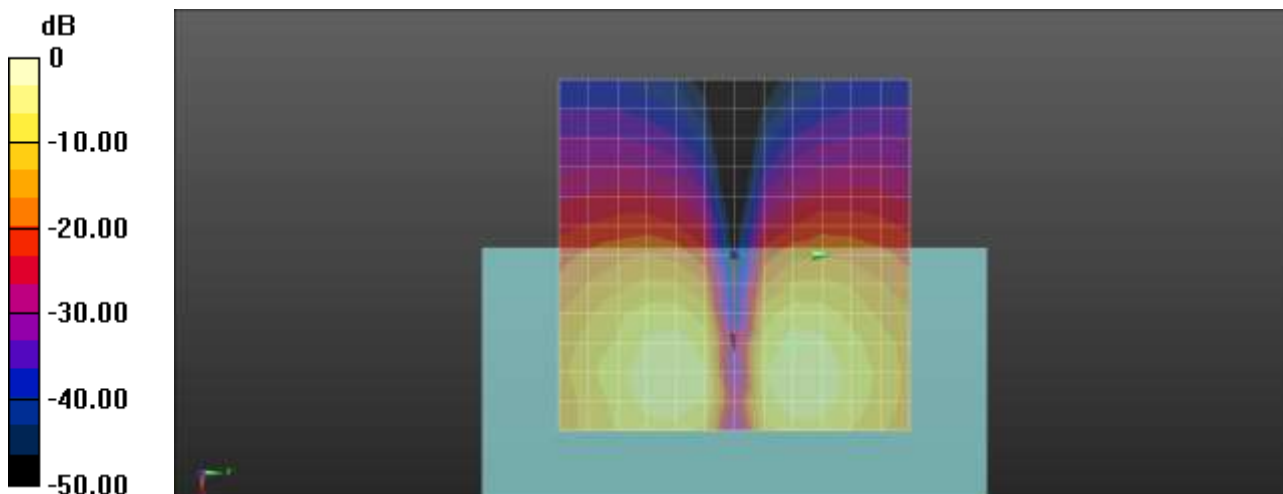

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.22

CDMA BC10 EVRC-B SO68/RC3 450ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 817.25 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 5.44 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -34.32 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 39.75 dB

ABM1 comp = 5.44 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

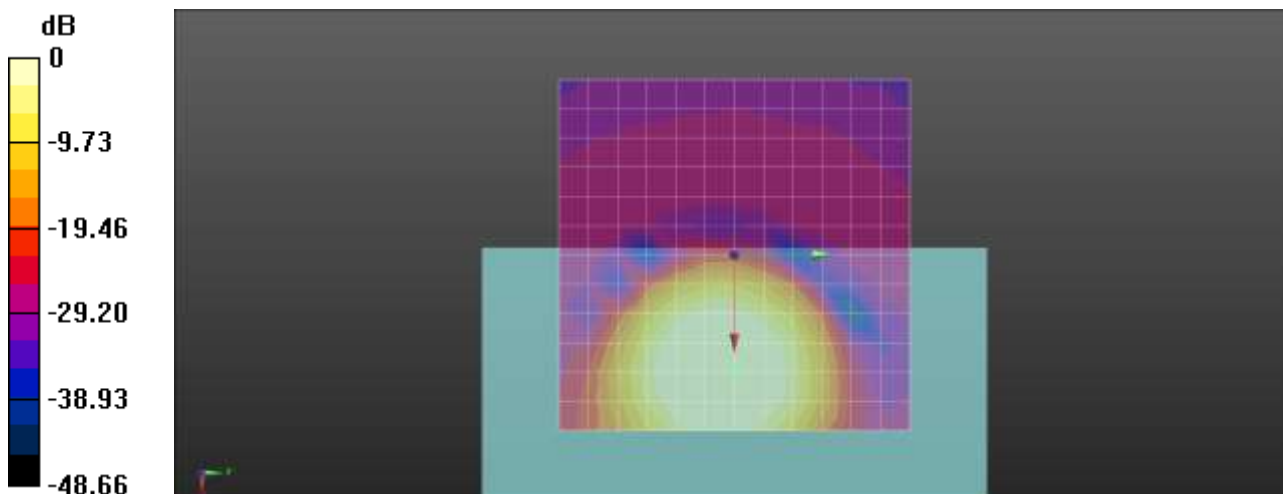

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.23

CDMA BC10 EVRC-B SO68/RC3 450ch Freq. Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 817.25 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 53.24

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.30 dB

BWC Factor = 9.48 dB

Location: 16.2, 0.4, 3.7 mm

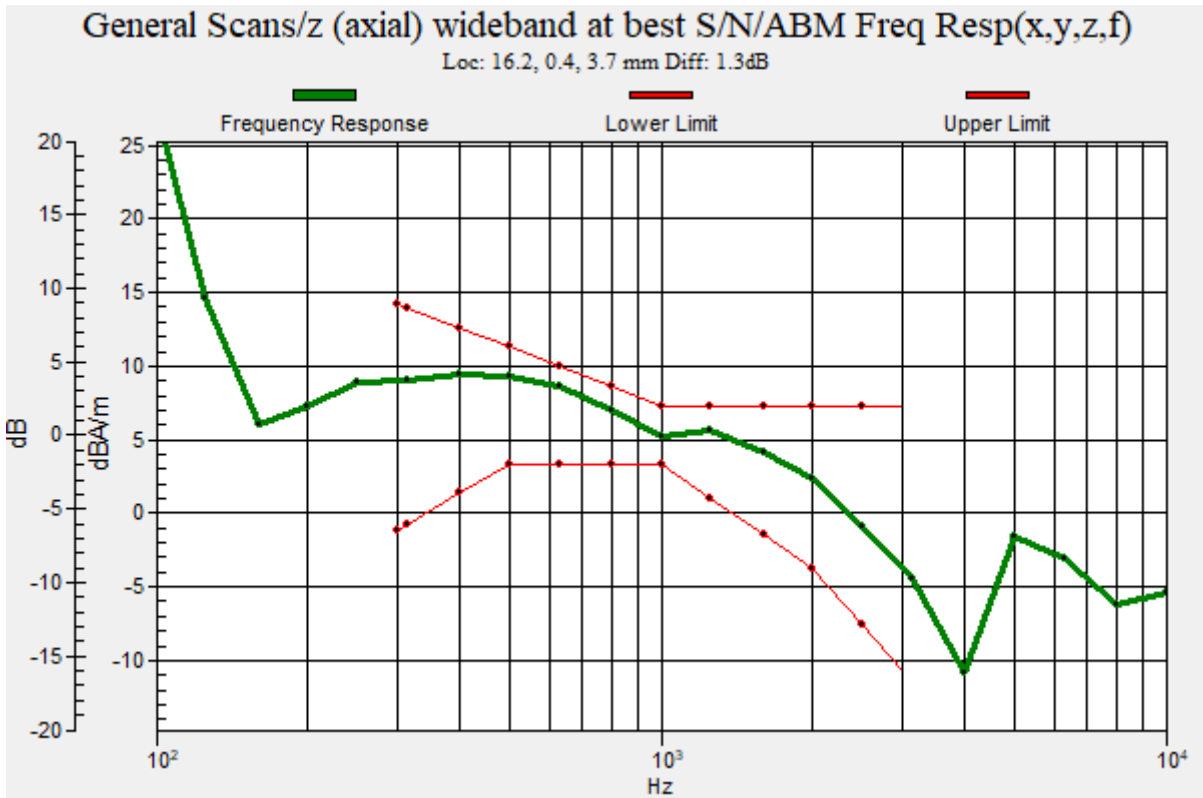

Plot No.24

CDMA BC10 EVRC-B SO68/RC3 450ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 817.25 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 19.68

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -5.55 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -43.23 dBA/m

Location: 12.5, 8.3, 3.7 mm



Cursor:

ABM1/ABM2 = 37.68 dB

ABM1 comp = -5.55 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

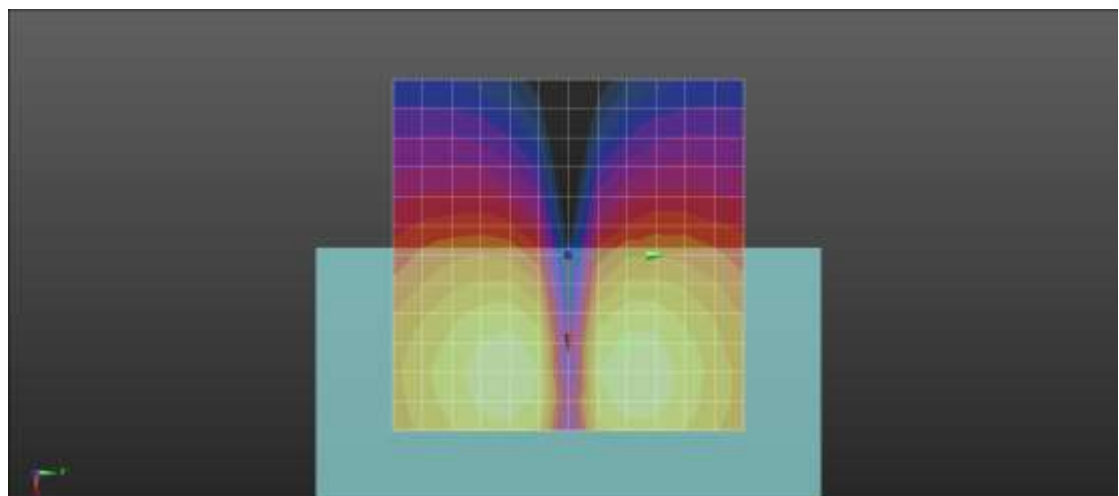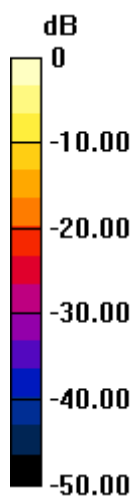

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.25

LTE 25 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 26365ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 5.45 dBA/m

BWC Factor = 0.17 dB

Location: 20.8, 0, 3.7 mm

Cursor:

ABM2 = -32.21 dBA/m

Location: 20.8, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 37.66 dB

ABM1 comp = 5.45 dBA/m

BWC Factor = 0.17 dB

Location: 20.8, 0, 3.7 mm

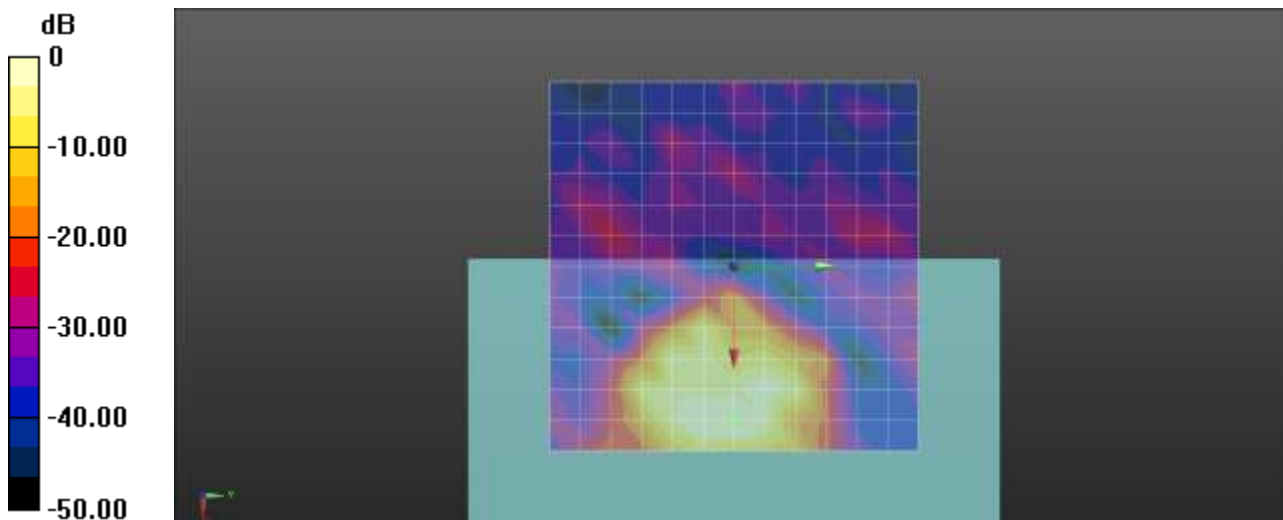

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.26

LTE 25 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 26365ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.99 dB

BWC Factor = 9.48 dB

Location: 20.8, -1.3, 3.7 mm

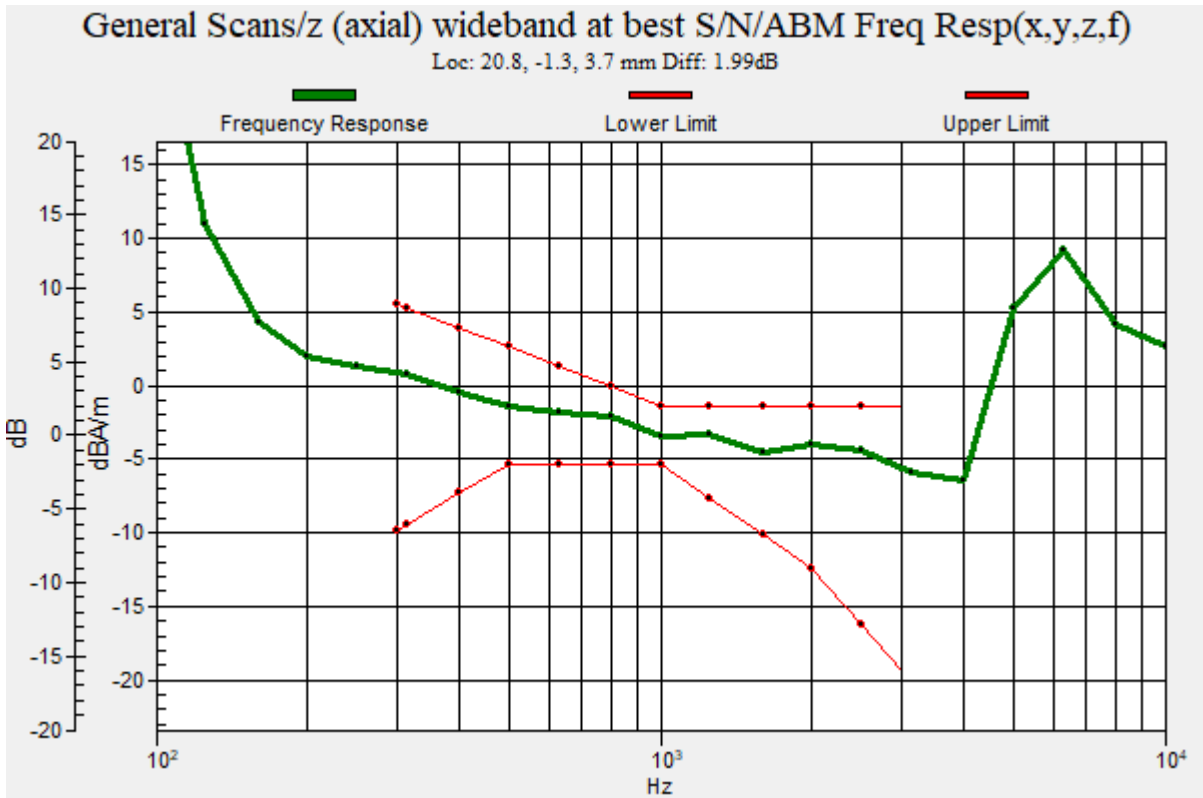

Plot No.27

LTE 25 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 26365ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -7.97 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, -12.5, 3.7 mm

Cursor:

ABM2 = -38.99 dBA/m

Location: 12.5, -12.5, 3.7 mm


Cursor:

ABM1/ABM2 = 31.02 dB

ABM1 comp = -7.97 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, -12.5, 3.7 mm

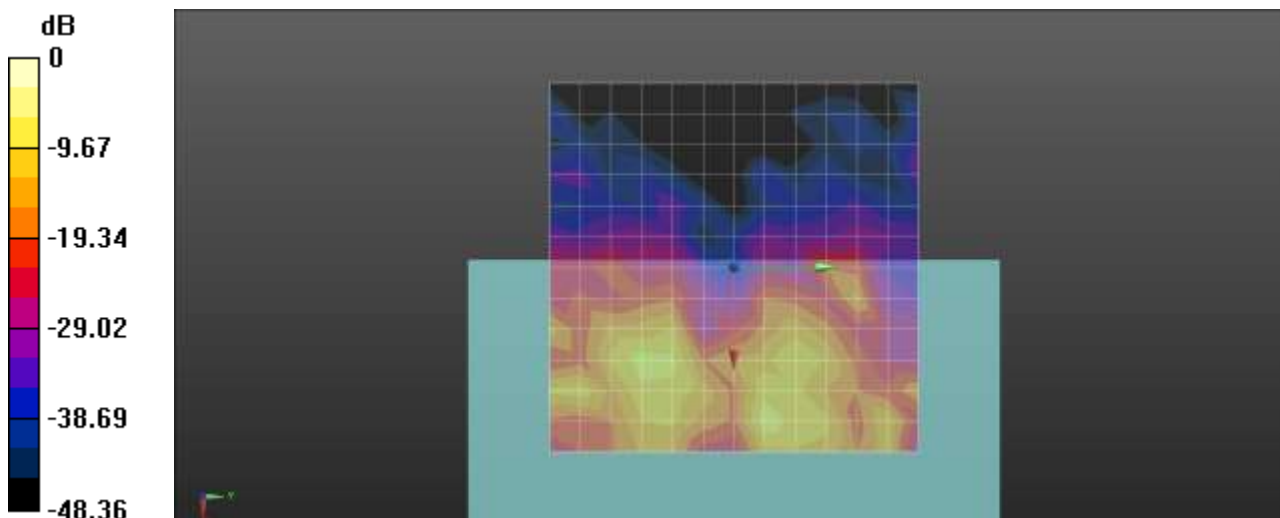

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.28

LTE 7 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 21100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 26.15
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = -5.40 dBA/m
BWC Factor = 0.17 dB
Location: 8.3, 0, 3.7 mm

Cursor:

ABM2 = -43.21 dBA/m
Location: 8.3, 0, 3.7 mm

Cursor:

ABM1/ABM2 = 37.81 dB
ABM1 comp = -5.40 dBA/m
BWC Factor = 0.17 dB
Location: 8.3, 0, 3.7 mm

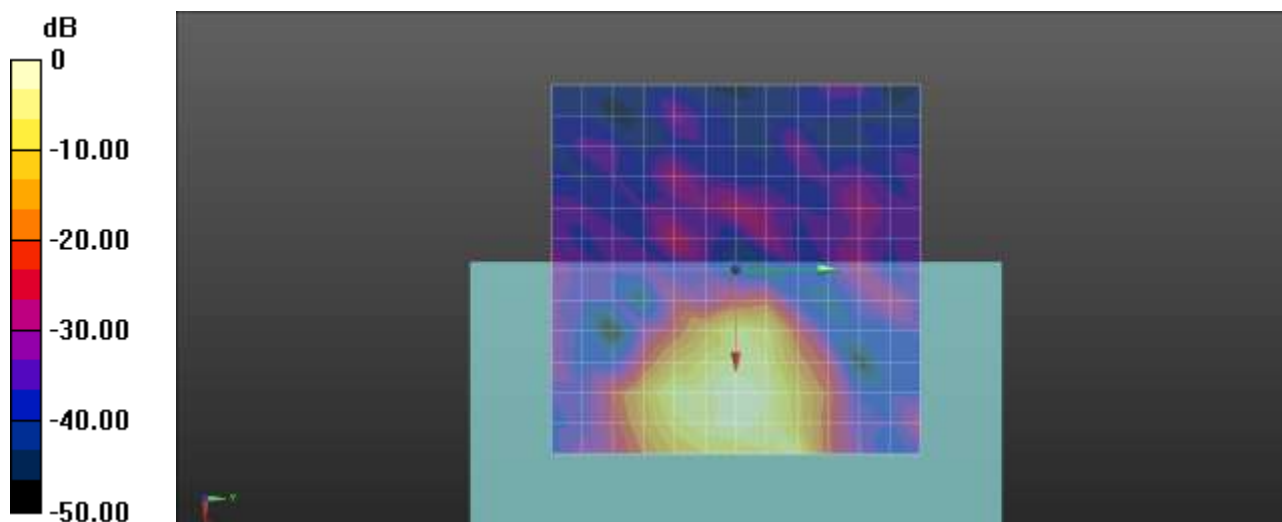

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.29

LTE 7 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 21100ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.80 dB

BWC Factor = 9.48 dB

Location: 8.5, 0.5, 3.7 mm

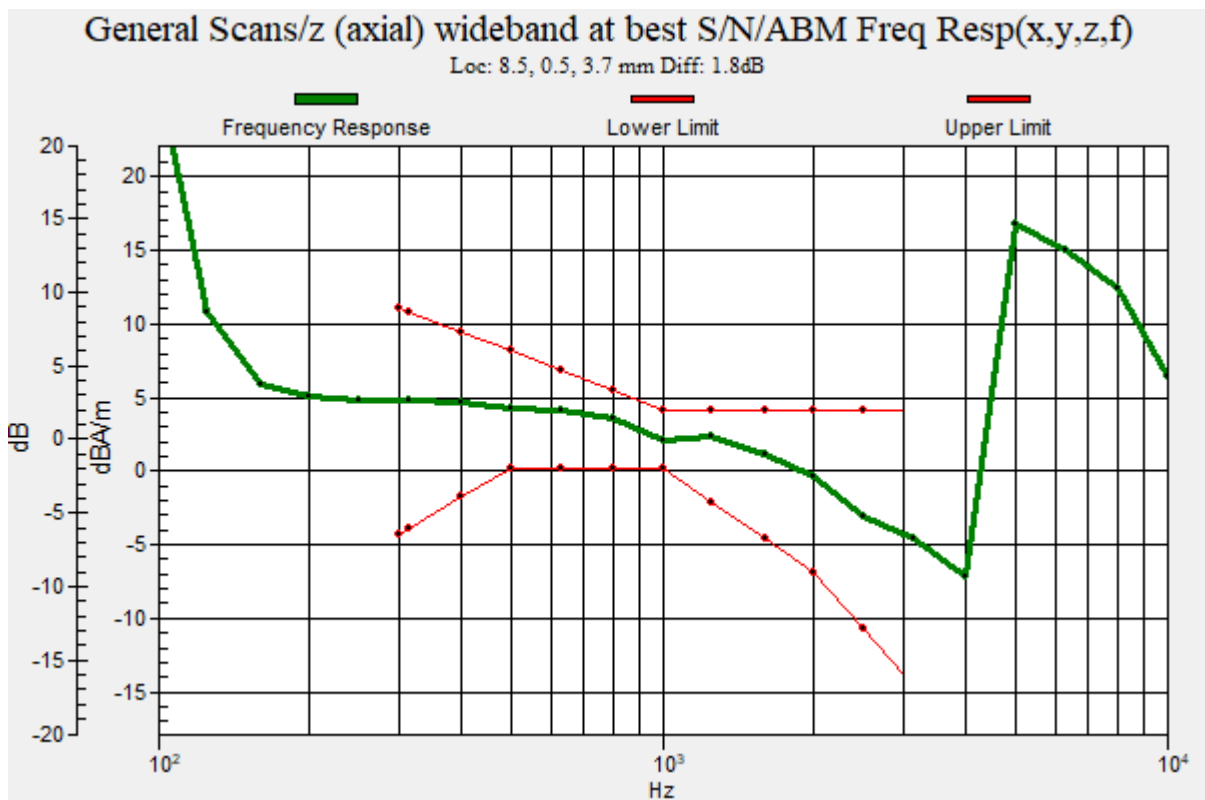

Plot No.30

LTE 7 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 21100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.88 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, -8.3, 3.7 mm

Cursor:

ABM2 = -37.99 dBA/m

Location: 16.7, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 37.11 dB

ABM1 comp = -0.88 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, -8.3, 3.7 mm

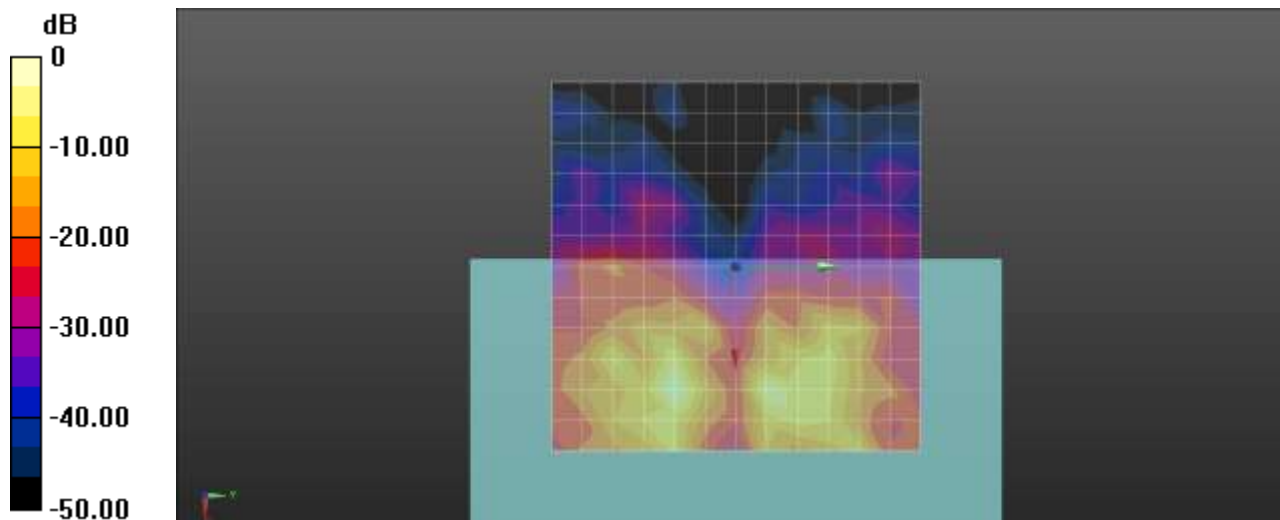

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.31

LTE 12 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23095ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.18 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -37.55 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 38.73 dB

ABM1 comp = 1.18 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

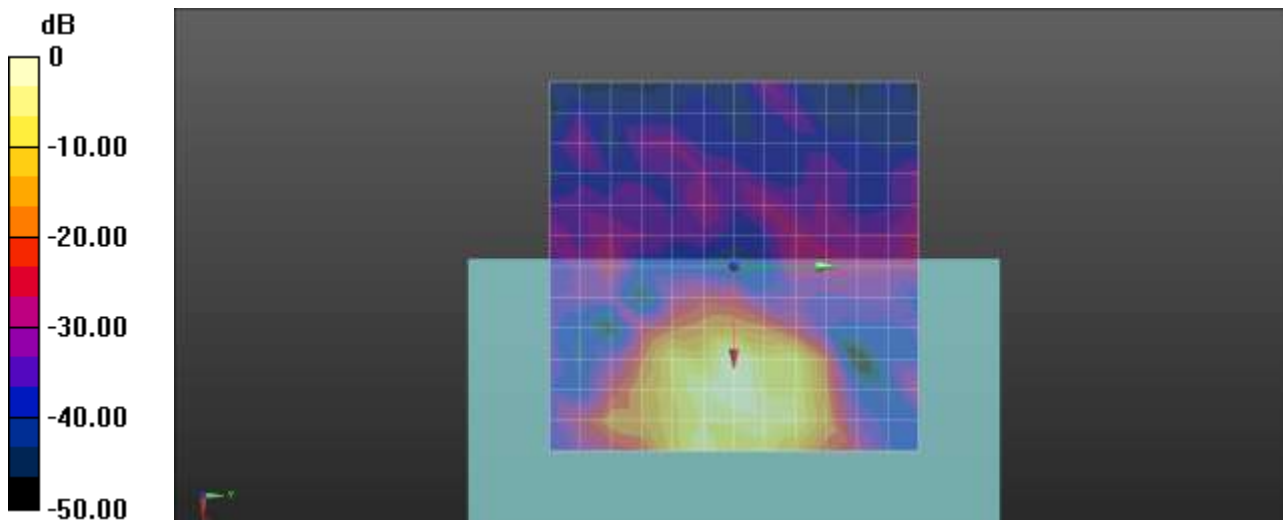

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.32

LTE 12 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23095ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.86 dB

BWC Factor = 9.48 dB

Location: 13.1, 0.1, 3.7 mm

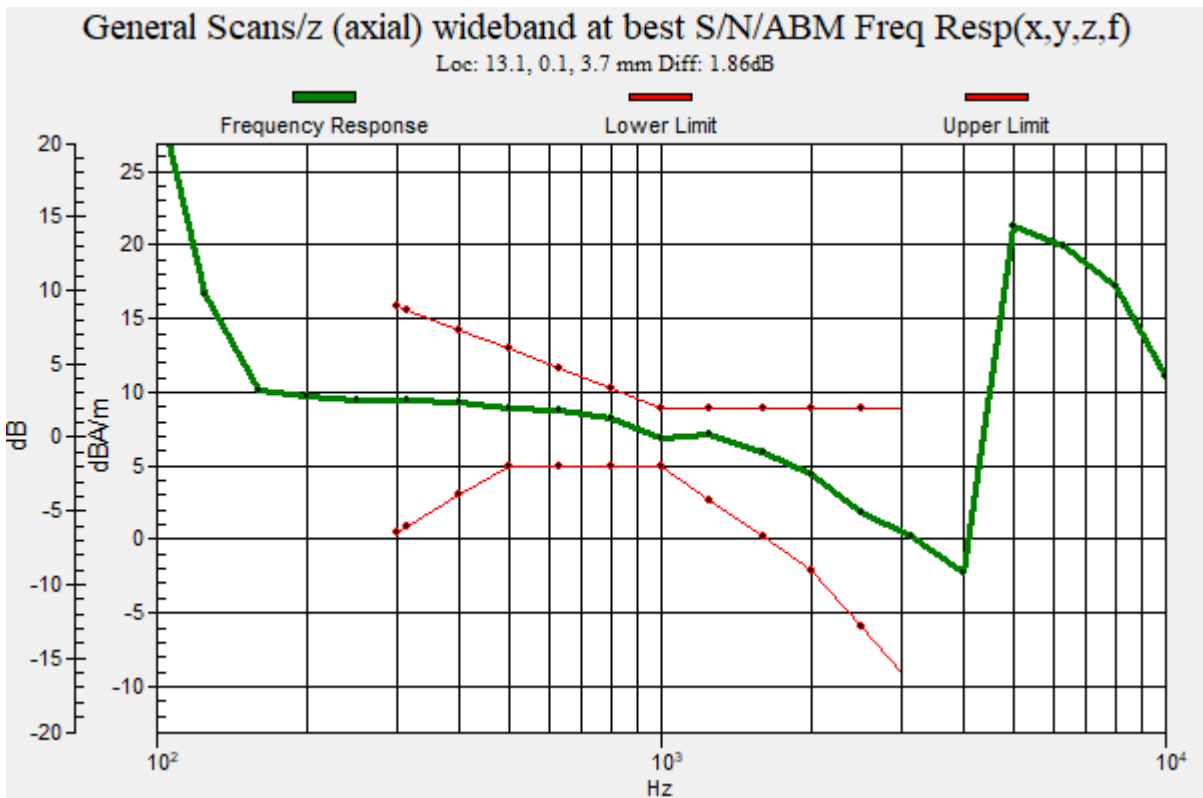

Plot No.33

LTE 12 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23095ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -1.82 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 8.3, 3.7 mm

Cursor:

ABM2 = -39.35 dBA/m

Location: 20.8, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 37.54 dB

ABM1 comp = -1.82 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 8.3, 3.7 mm

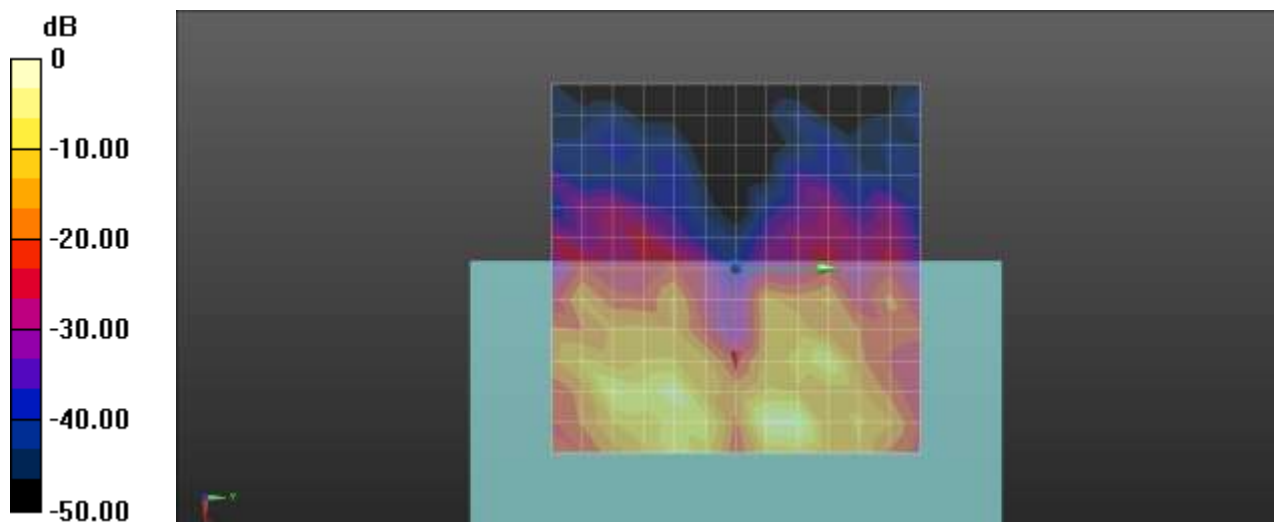

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.34

LTE 13 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23230ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.13 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -38.74 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 38.61 dB

ABM1 comp = -0.13 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

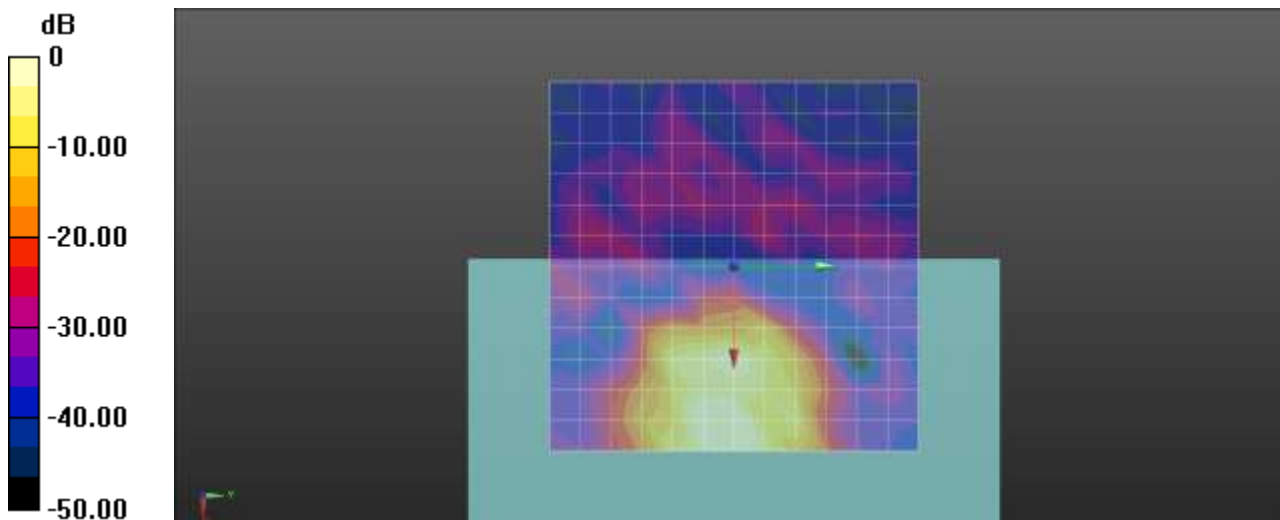

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.35

LTE 13 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23230ch Freq.Response

DUT: SM-G781V; Type: Bar


Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_Normal_51s new.wav
 Output Gain: 56.25
 Measure Window Start: 300ms
 Measure Window Length: 51000ms
 BWC applied: 9.47 dB
 Device Reference Point: 0, 0, -6.3 mm

| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.85 dB
 BWC Factor = 9.47 dB
 Location: 12.5, -0.2, 3.7 mm

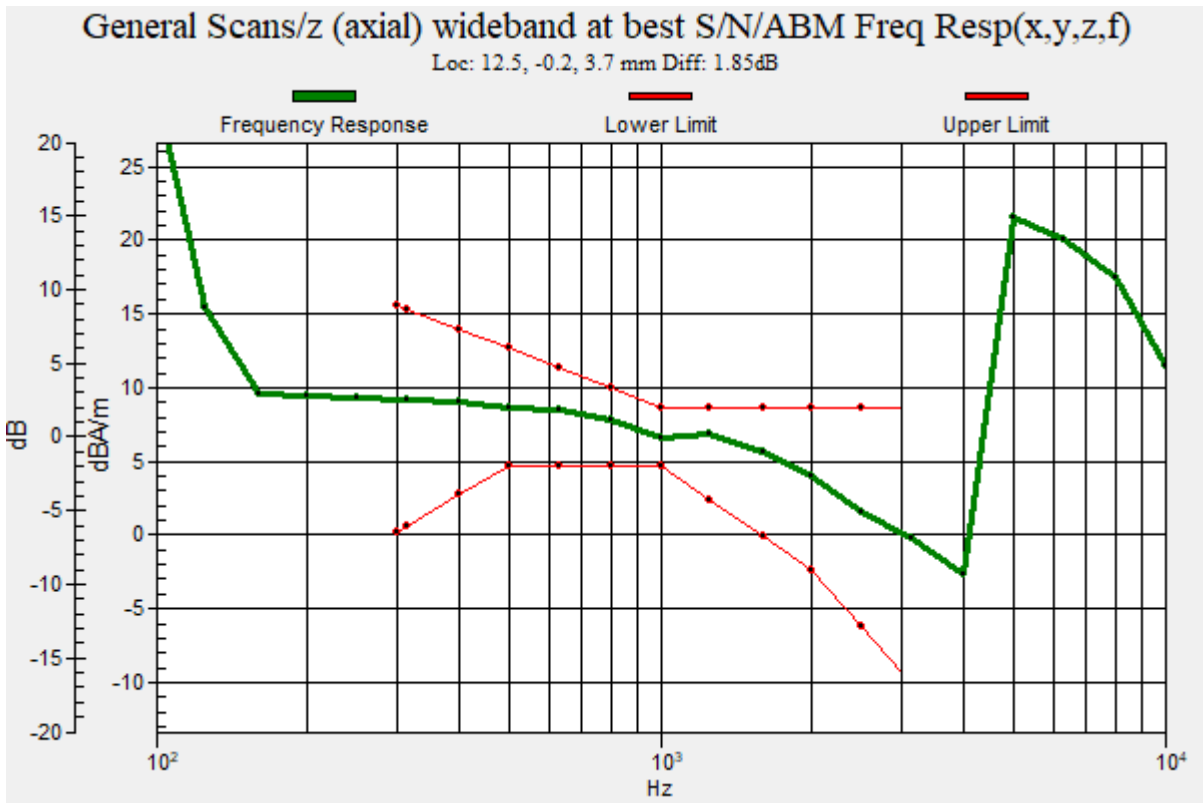

Plot No.36

LTE 13 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23230ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 26.15
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = -8.01 dBA/m
BWC Factor = 0.16 dB
Location: 16.7, 12.5, 3.7 mm

Cursor:

ABM2 = -41.81 dBA/m
Location: 16.7, 12.5, 3.7 mm

Cursor:

ABM1/ABM2 = 33.80 dB
ABM1 comp = -8.01 dBA/m
BWC Factor = 0.16 dB
Location: 16.7, 12.5, 3.7 mm

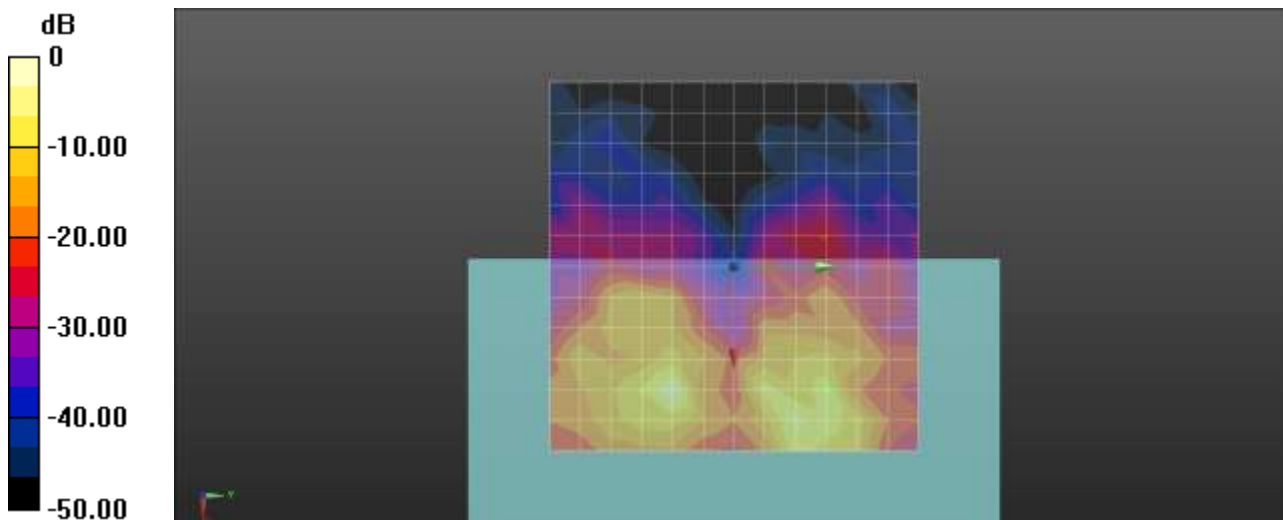

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.37

LTE 14 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23330ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 5.68 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -35.80 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 41.48 dB

ABM1 comp = 5.68 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

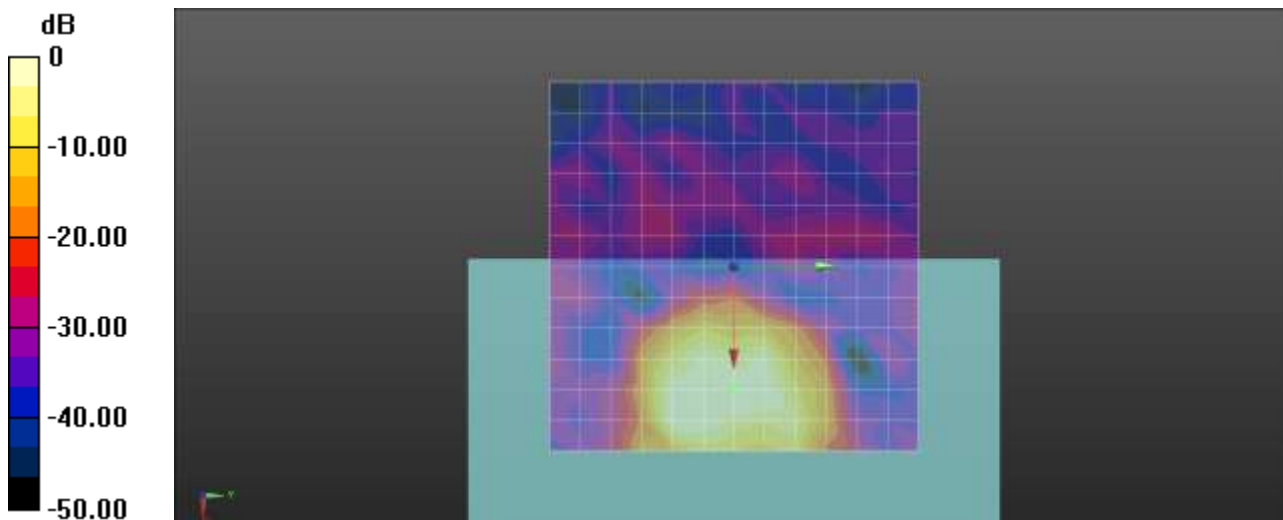

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.38

LTE 14 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23330ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.81 dB

BWC Factor = 9.47 dB

Location: 16.6, 0.1, 3.7 mm

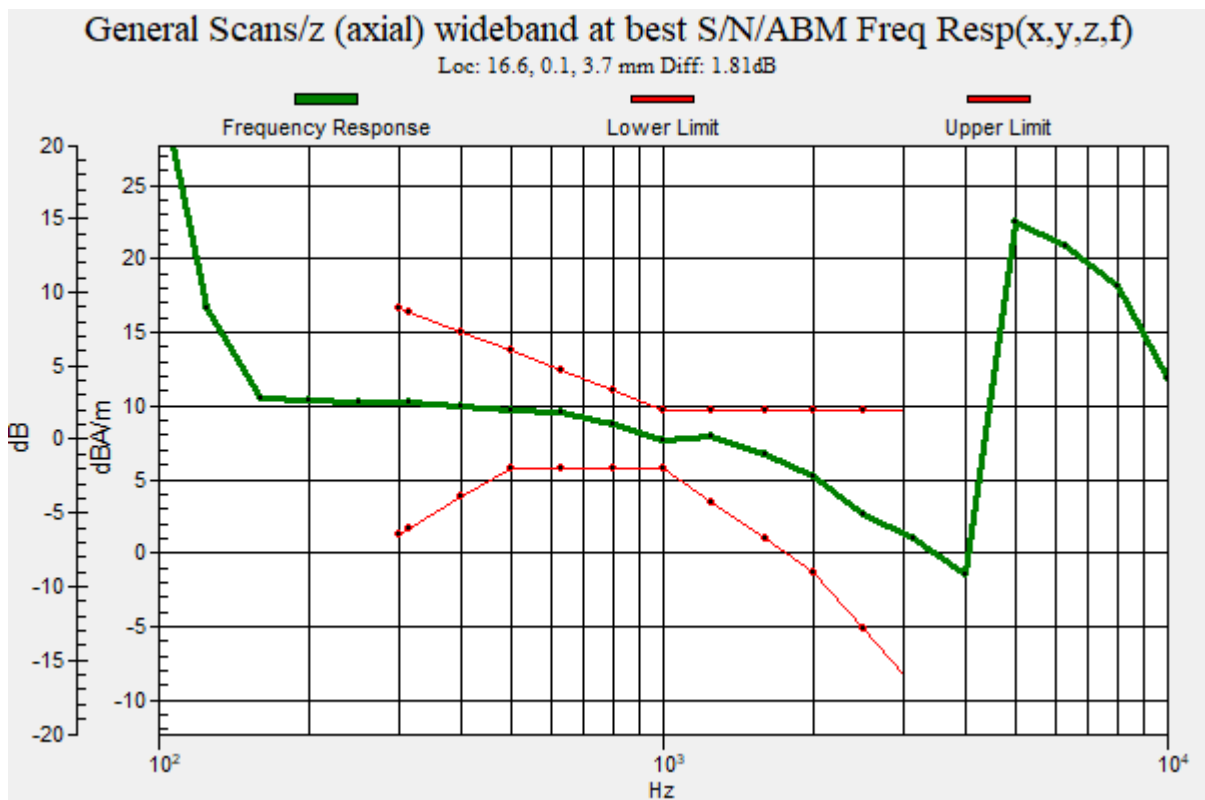

Plot No.39

LTE 14 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 23330ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 26.15
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = -6.09 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -41.63 dBA/m
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM1/ABM2 = 35.54 dB
ABM1 comp = -6.09 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

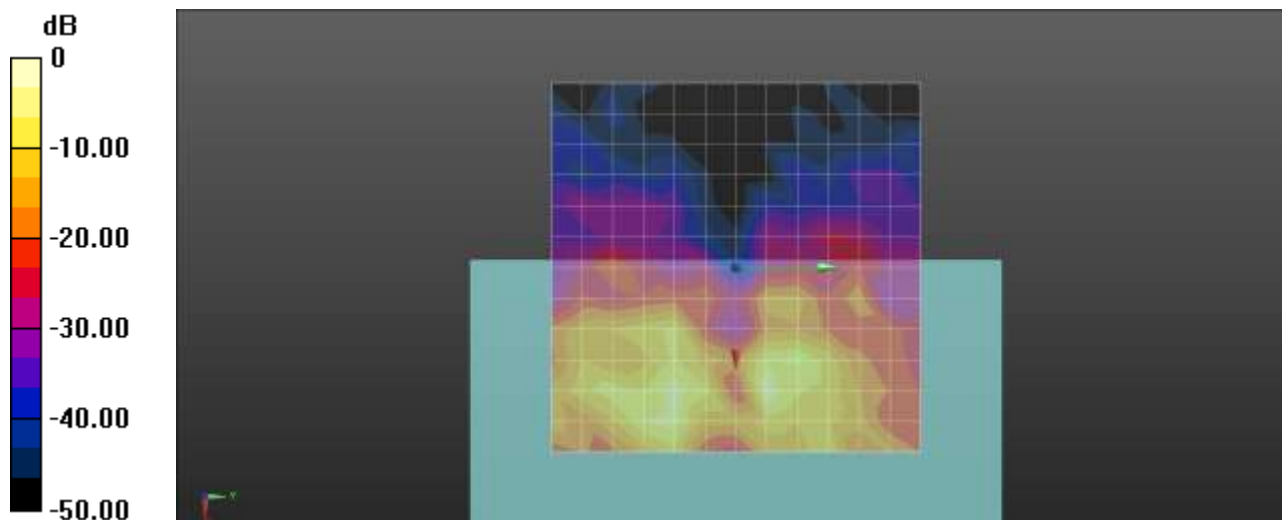

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.40

LTE 26 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 26865ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 3.66 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -33.57 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 37.23 dB

ABM1 comp = 3.66 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

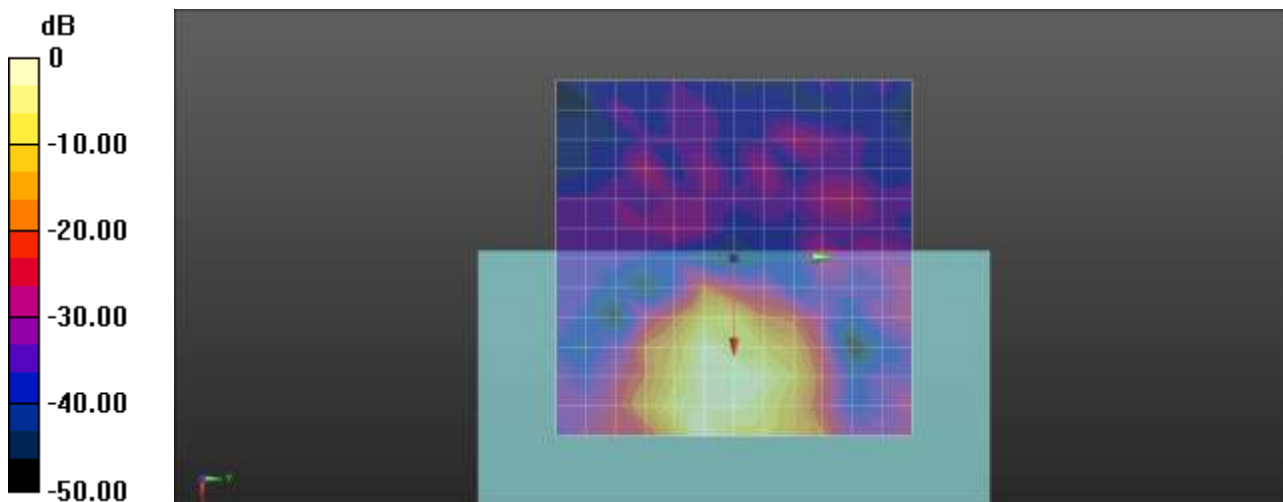

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.41

LTE 26 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 26865ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.91 dB

BWC Factor = 9.48 dB

Location: 16.7, 0, 3.7 mm

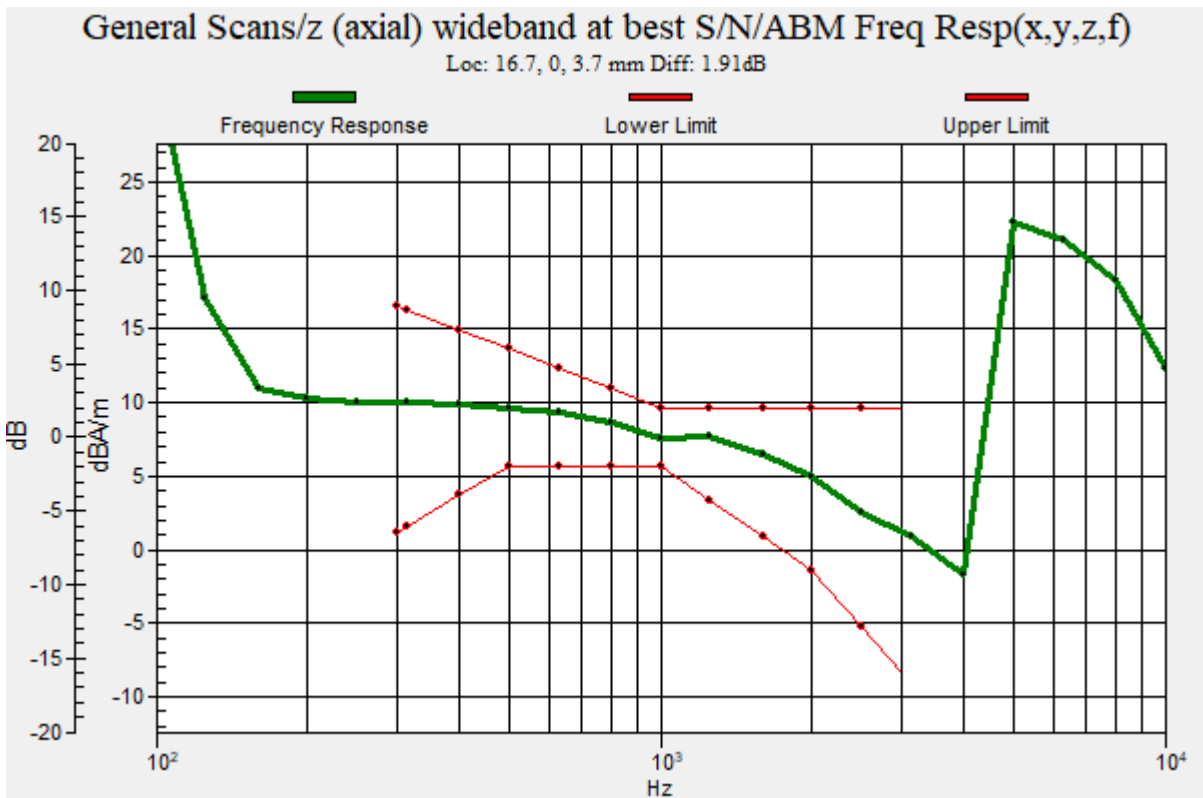

Plot No.42

LTE 26 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 26865ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -1.50 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -38.04 dBA/m

Location: 16.7, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 36.54 dB

ABM1 comp = -1.50 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 4.2, 3.7 mm

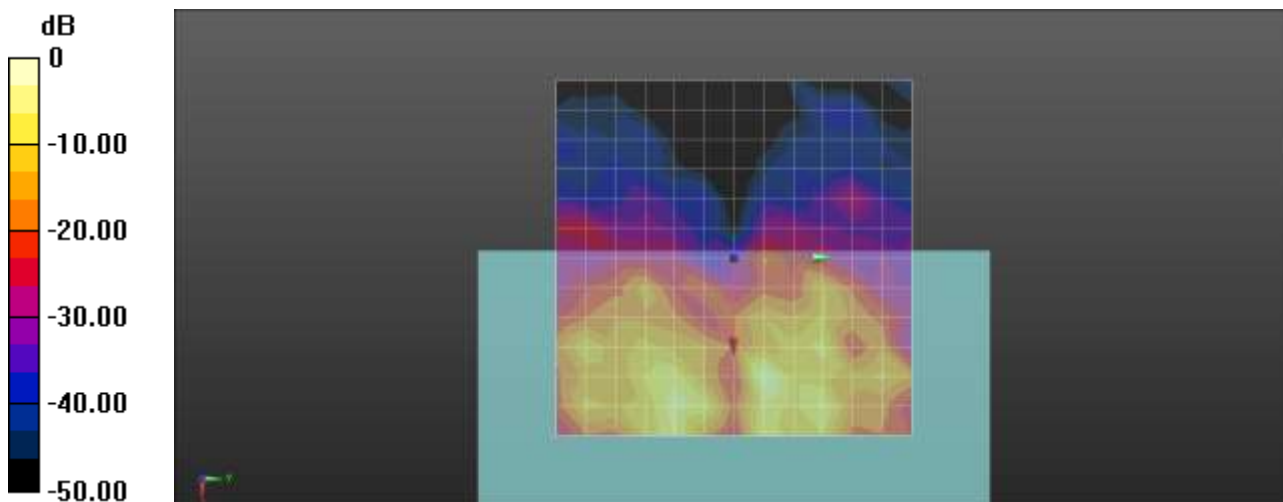

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.43

LTE 30 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 27710ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.00 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -38.06 dBA/m

Location: 16.7, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 38.06 dB

ABM1 comp = -0.00 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

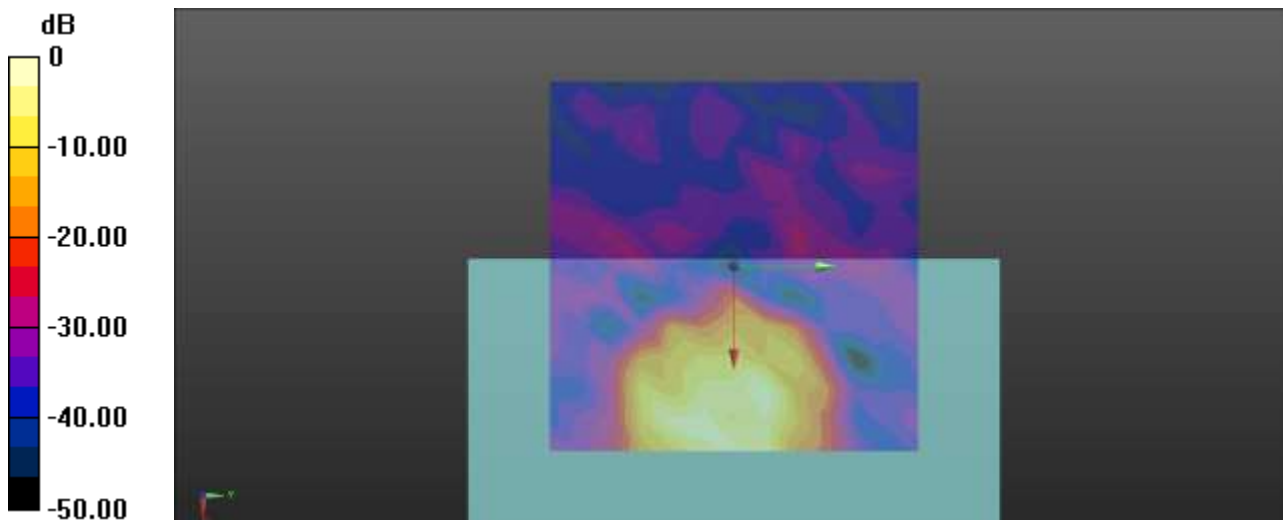

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.44

LTE 30 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 27710ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.88 dB

BWC Factor = 9.47 dB

Location: 16.9, 4.1, 3.7 mm

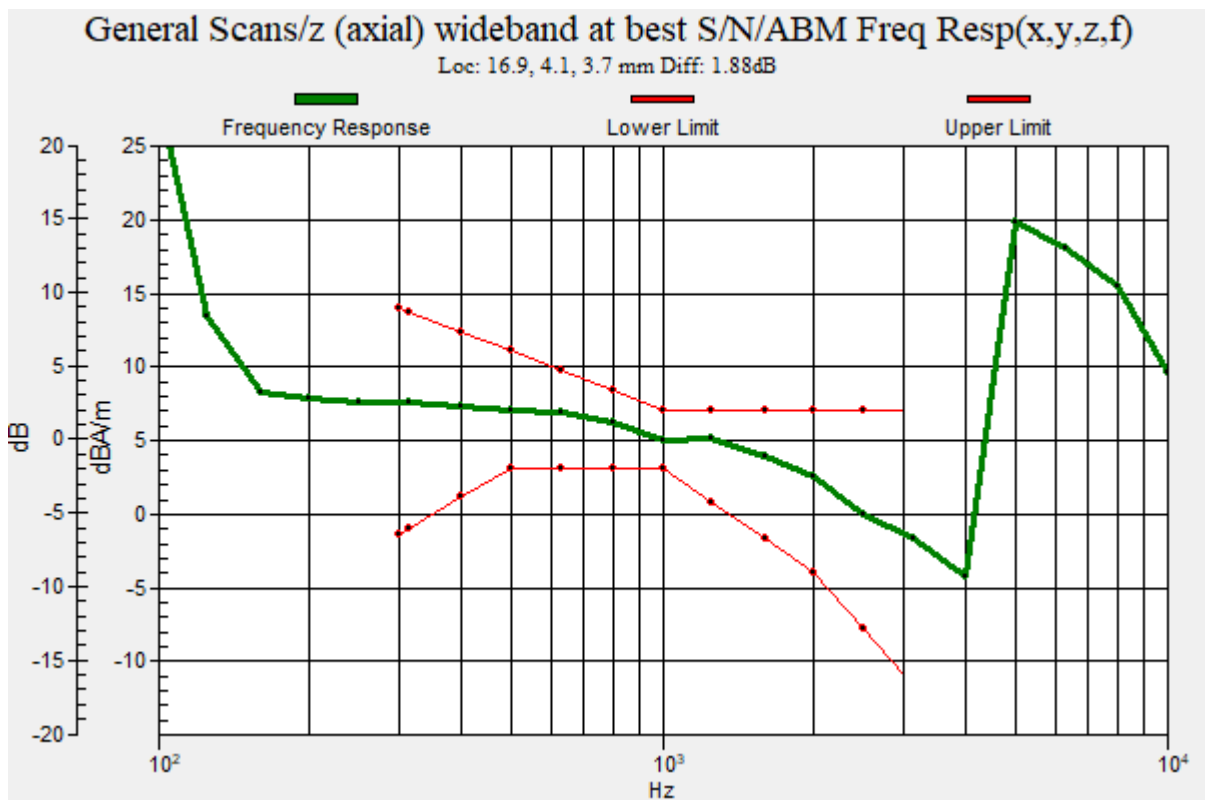

Plot No.45

LTE 30 QPSK EVS WB 5.9bitrate 10MHz 25RB 24offset 27710ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -4.38 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -40.18 dBA/m

Location: 16.7, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 35.79 dB

ABM1 comp = -4.38 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

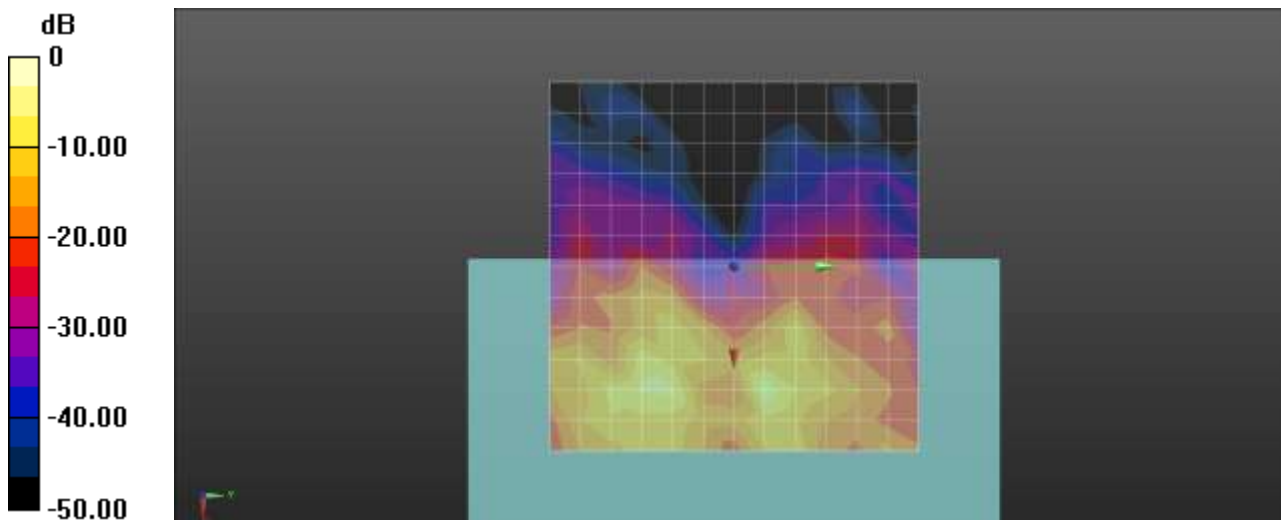

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.46

LTE 66 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 132322ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -2.01 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -40.34 dBA/m

Location: 12.5, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 38.33 dB

ABM1 comp = -2.01 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

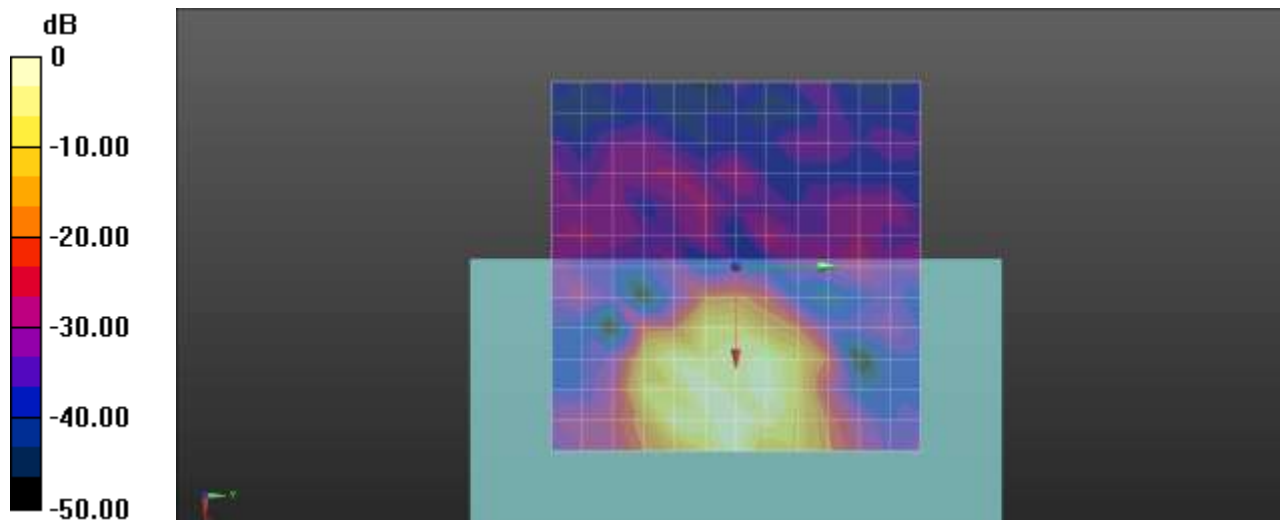

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.47

LTE 66 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 132322ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.81 dB

BWC Factor = 9.47 dB

Location: 13.8, 4.3, 3.7 mm

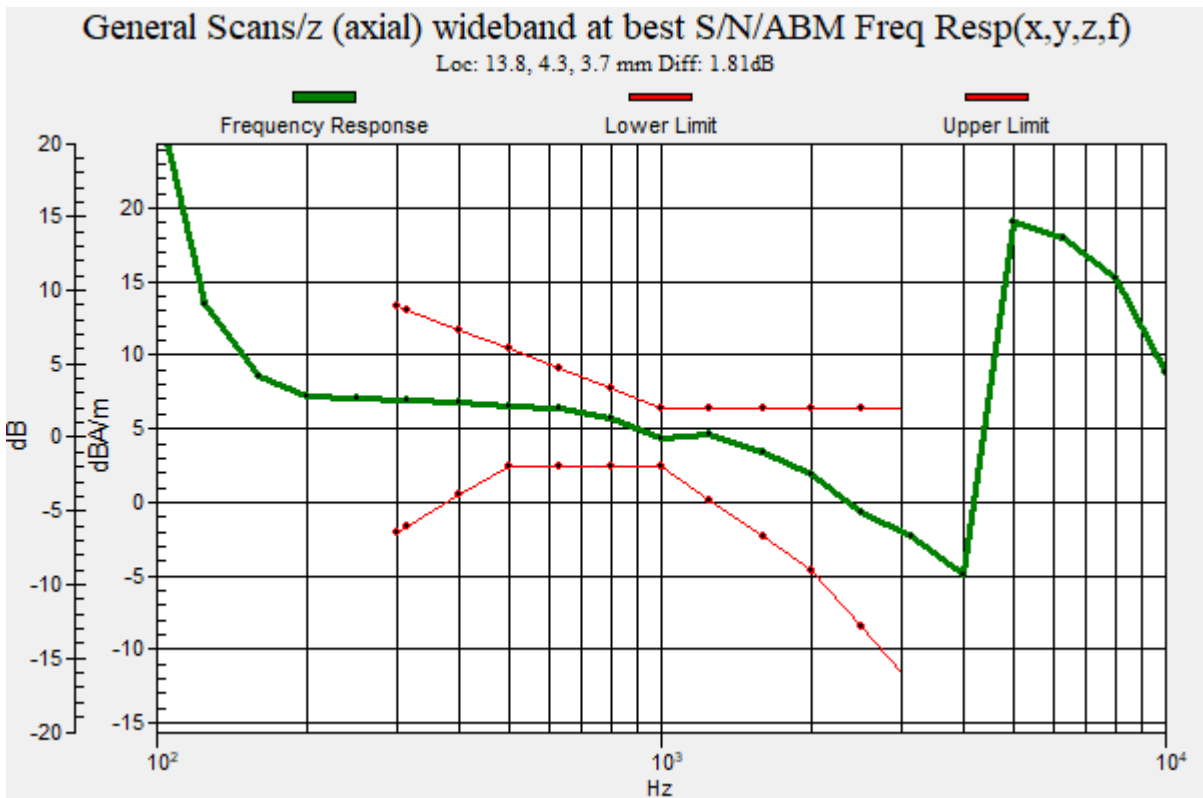

Plot No.48

LTE 66 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 132322ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -8.67 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 12.5, 3.7 mm

Cursor:

ABM2 = -43.68 dBA/m

Location: 12.5, 12.5, 3.7 mm


Cursor:

ABM1/ABM2 = 35.01 dB

ABM1 comp = -8.67 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 12.5, 3.7 mm

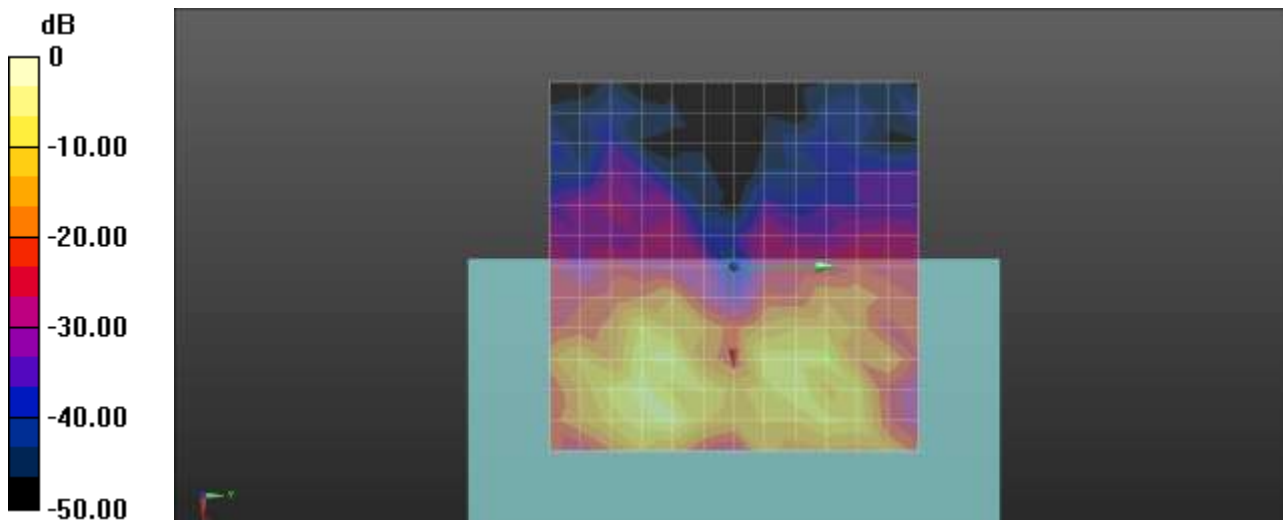

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.49

LTE 71 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 133322ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

Cursor:

ABM2 = -39.20 dBA/m

Location: 12.5, -4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 38.34 dB

ABM1 comp = -0.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

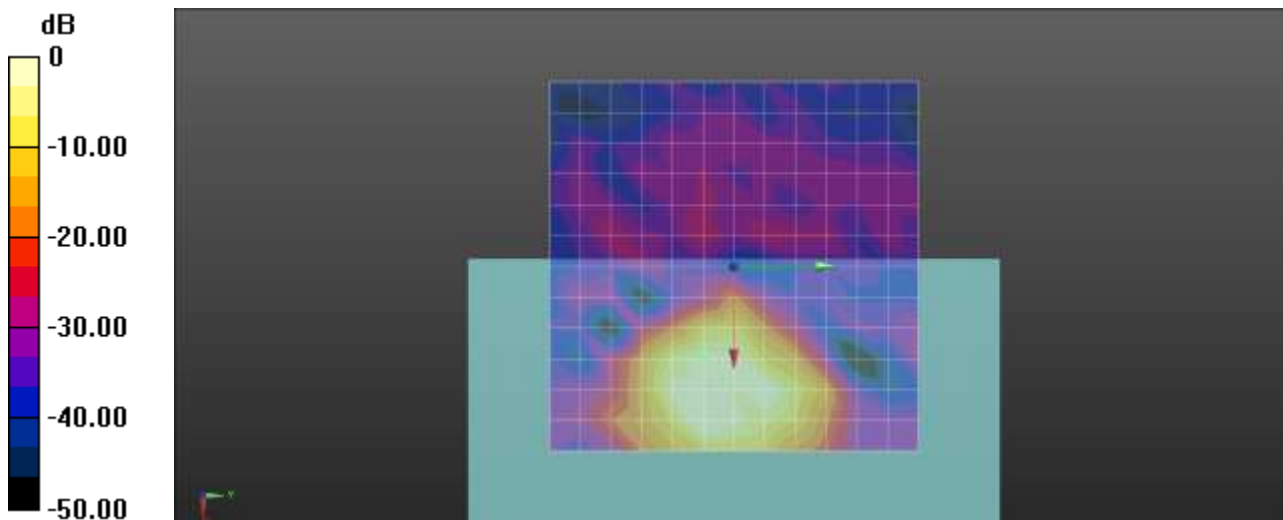

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.50

LTE 71 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 133322ch Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.25

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.89 dB

BWC Factor = 9.47 dB

Location: 12.4, -3.7, 3.7 mm

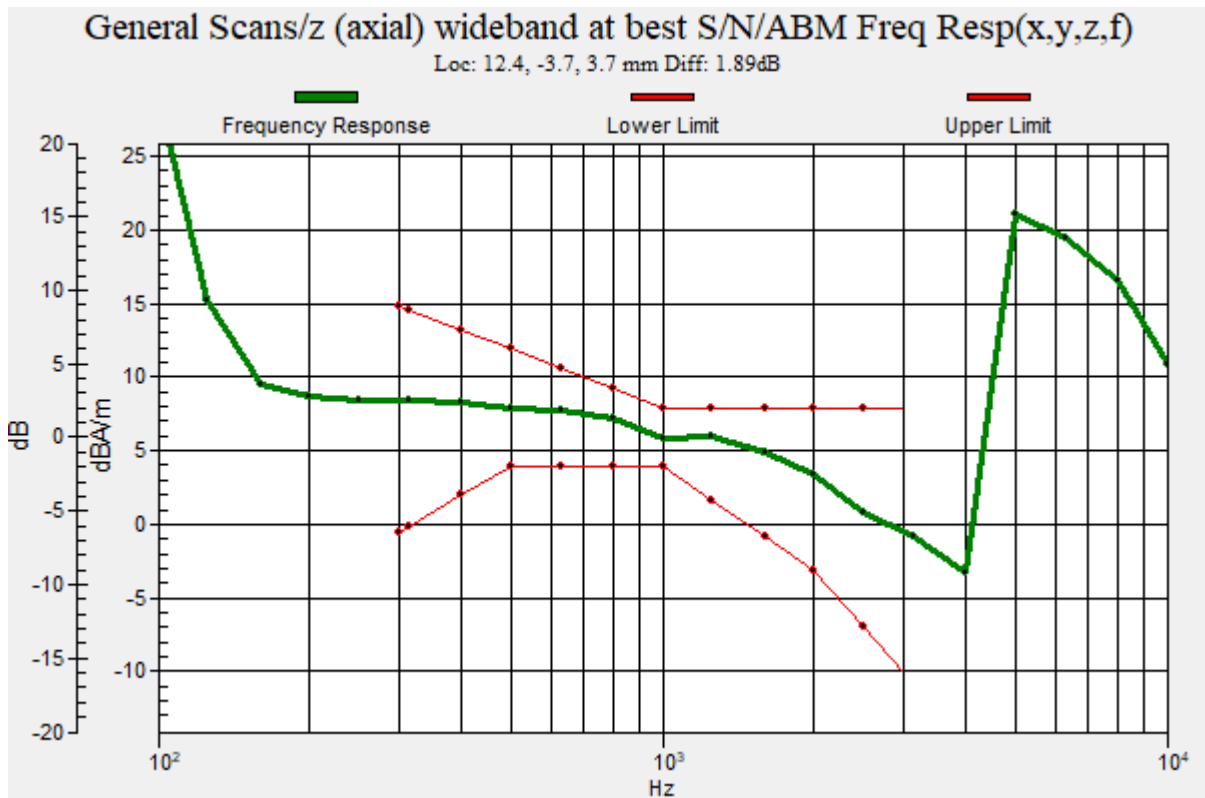

Plot No.51

LTE 71 QPSK EVS WB 5.9bitrate 20MHz 50RB 49offset 133322ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.15

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -2.52 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -40.45 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 37.93 dB

ABM1 comp = -2.52 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

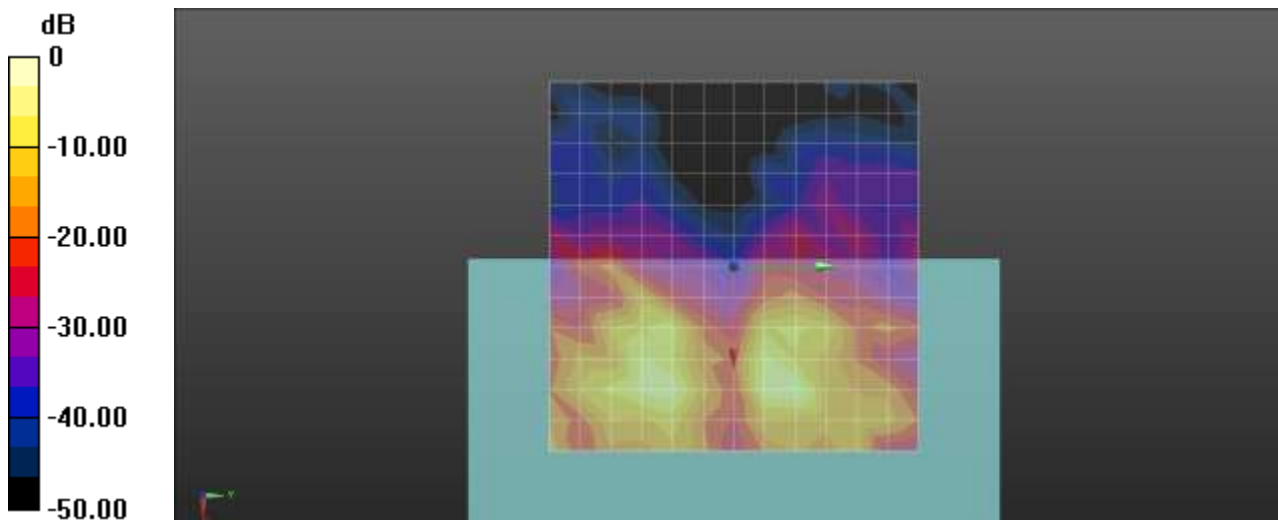

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.52

LTE 41 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 40620ch 2 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 5.64 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, -4.2, 3.7 mm

Cursor:

ABM2 = -28.84 dBA/m

Location: 16.7, -4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 34.48 dB

ABM1 comp = 5.64 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, -4.2, 3.7 mm

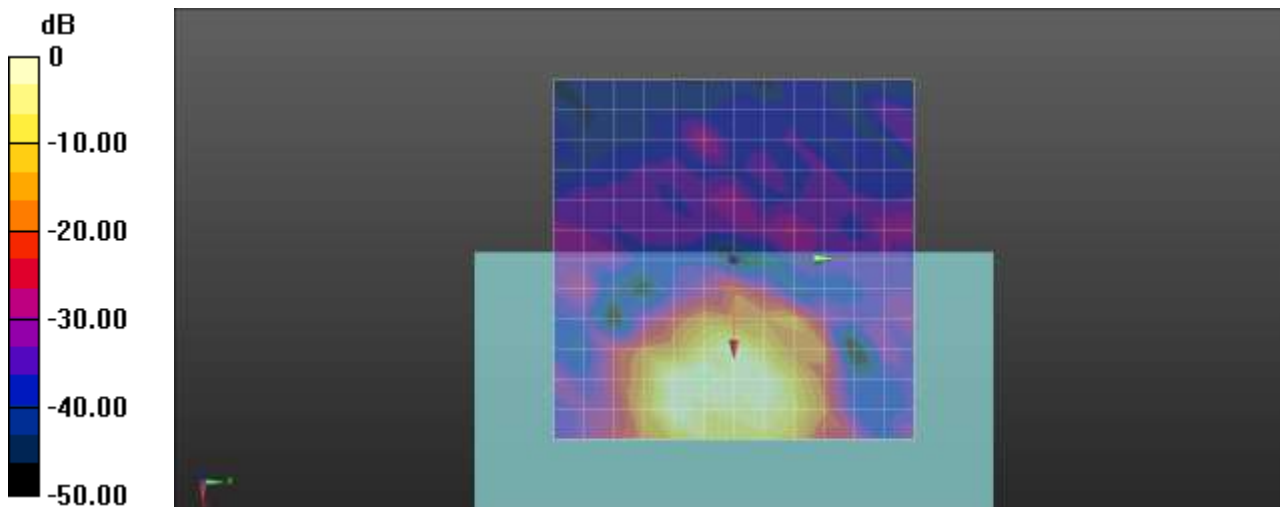

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.53

LTE 41 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 40620ch 2 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.27

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.71 dB

BWC Factor = 9.48 dB

Location: 16.6, -4.1, 3.7 mm

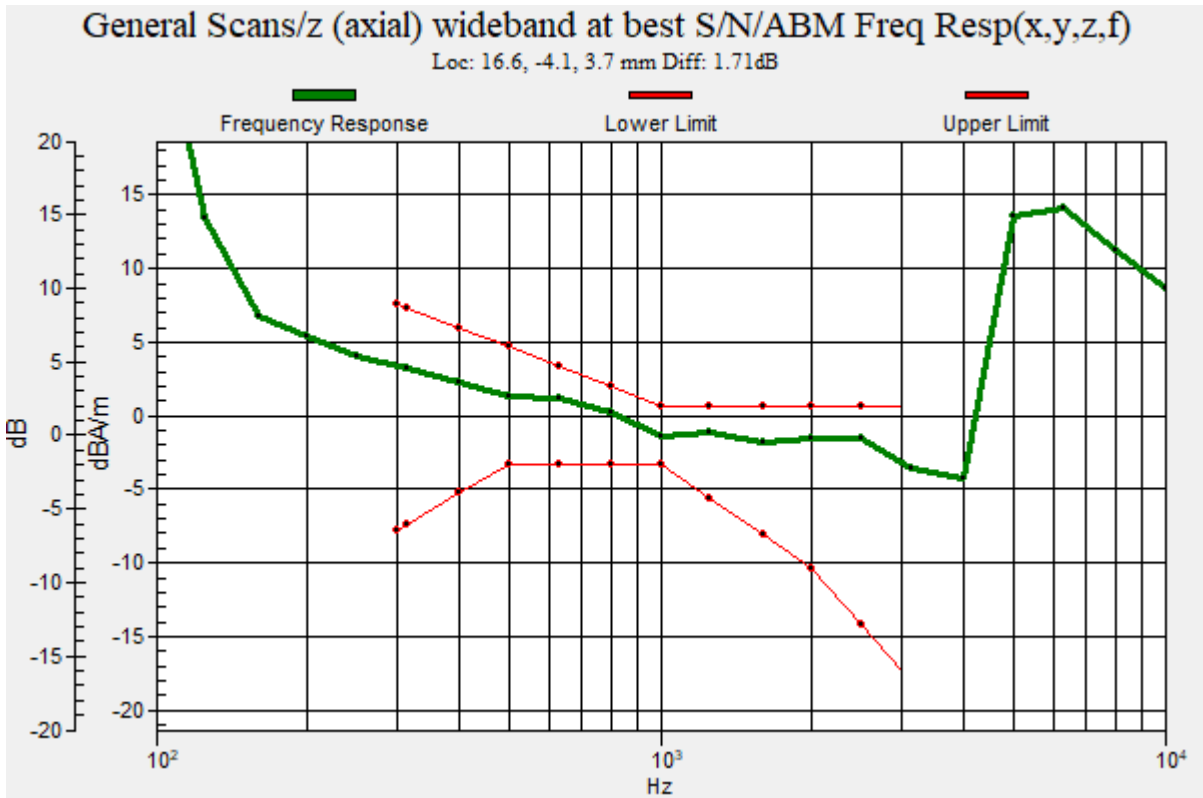

Plot No.54

LTE 41 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 40620ch 2 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -12.47 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -38.11 dBA/m

Location: 12.5, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 25.64 dB

ABM1 comp = -12.47 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 4.2, 3.7 mm

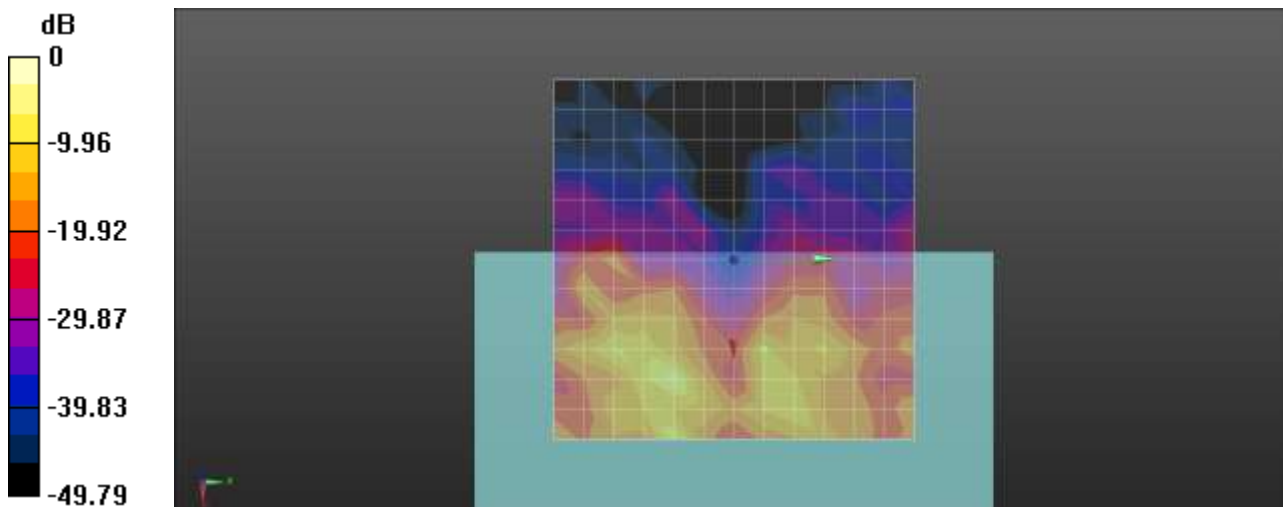

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.55

LTE 38 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 38000ch 2 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.83 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -4.2, 3.7 mm

Cursor:

ABM2 = -25.66 dBA/m

Location: 16.7, -4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 28.48 dB

ABM1 comp = 2.83 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -4.2, 3.7 mm

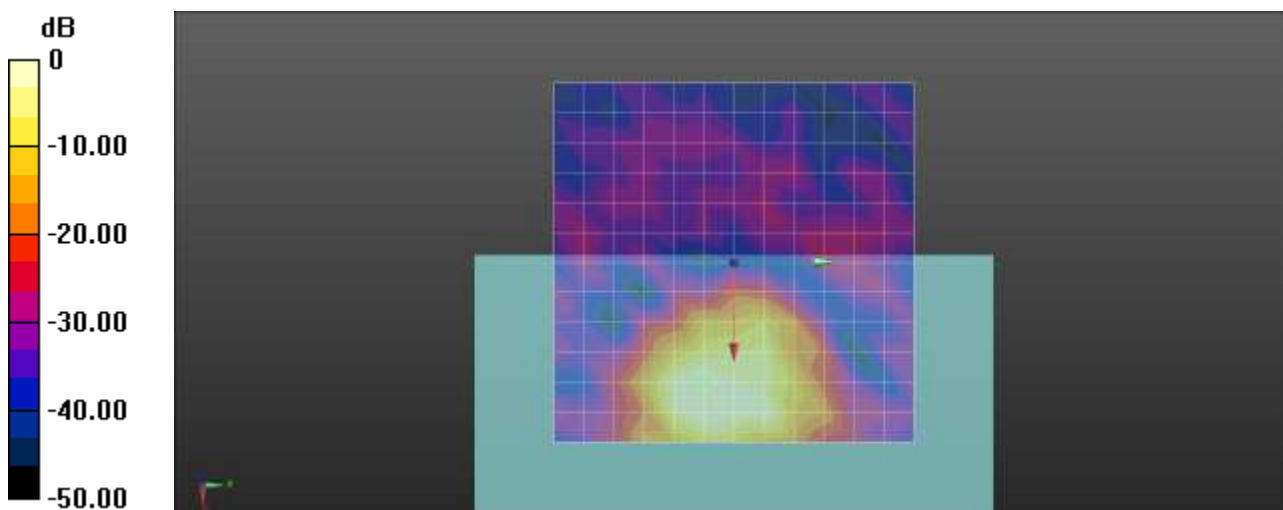

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.56

LTE 38 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 38000ch 2 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best

S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.27

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.36 dB

BWC Factor = 9.47 dB

Location: 17, -3.9, 3.7 mm

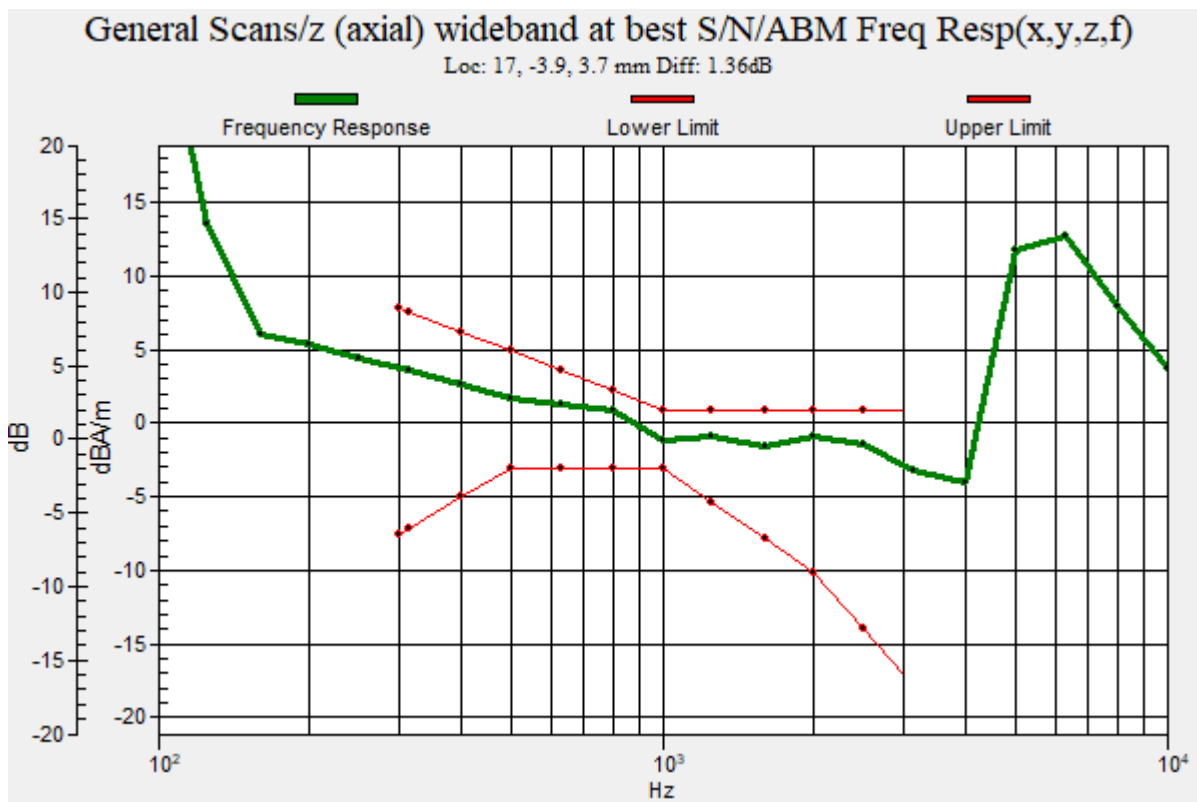

Plot No.57

LTE 38 QPSK EVS wb 5_9bitrate 20MHz 100RB 0offset 38000ch 2 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -10.05 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 8.3, 3.7 mm

Cursor:

ABM2 = -40.46 dBA/m

Location: 8.3, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 30.41 dB

ABM1 comp = -10.05 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 8.3, 3.7 mm

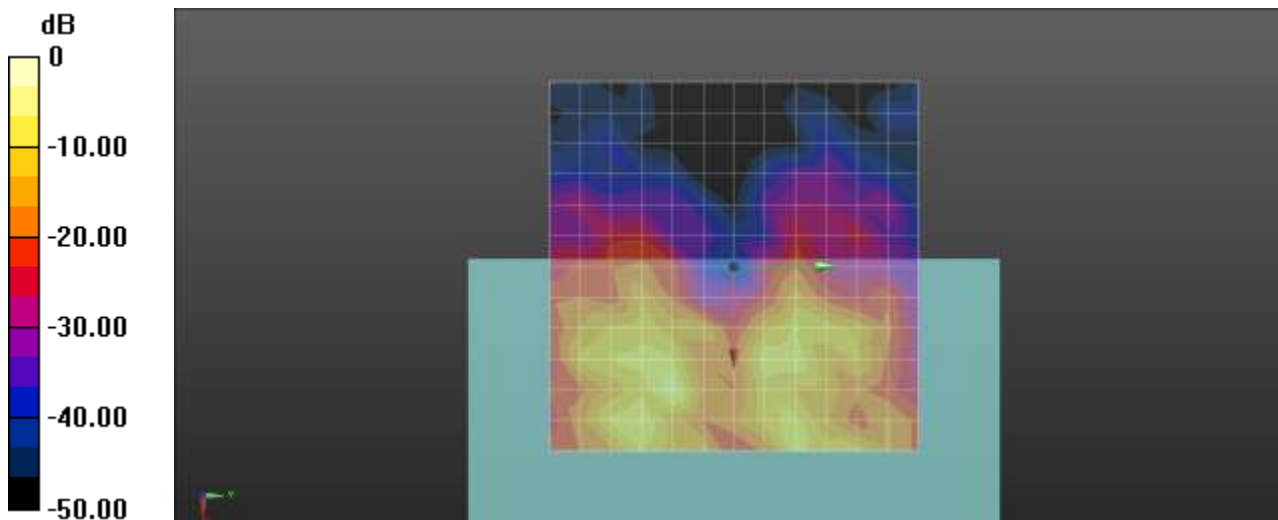

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.58

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 38750ch 2 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.93 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 4.2, 3.7 mm

Cursor:

ABM2 = -30.93 dBA/m

Location: 20.8, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 32.86 dB

ABM1 comp = 1.93 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 4.2, 3.7 mm

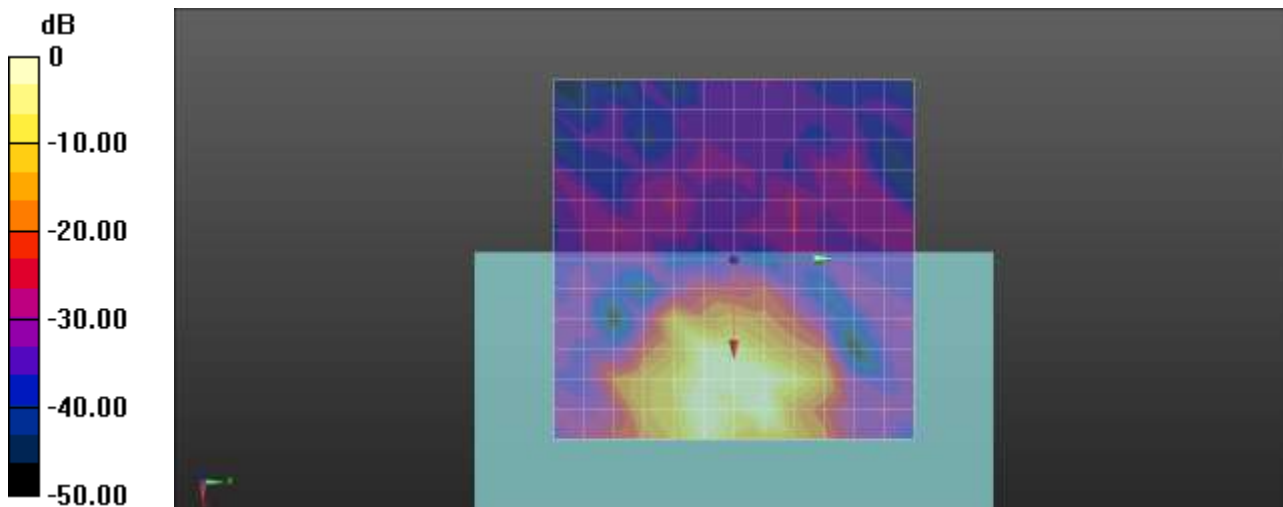

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.59

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 38750ch 2 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.27

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.54 dB

BWC Factor = 9.47 dB

Location: 19.1, 4, 3.7 mm

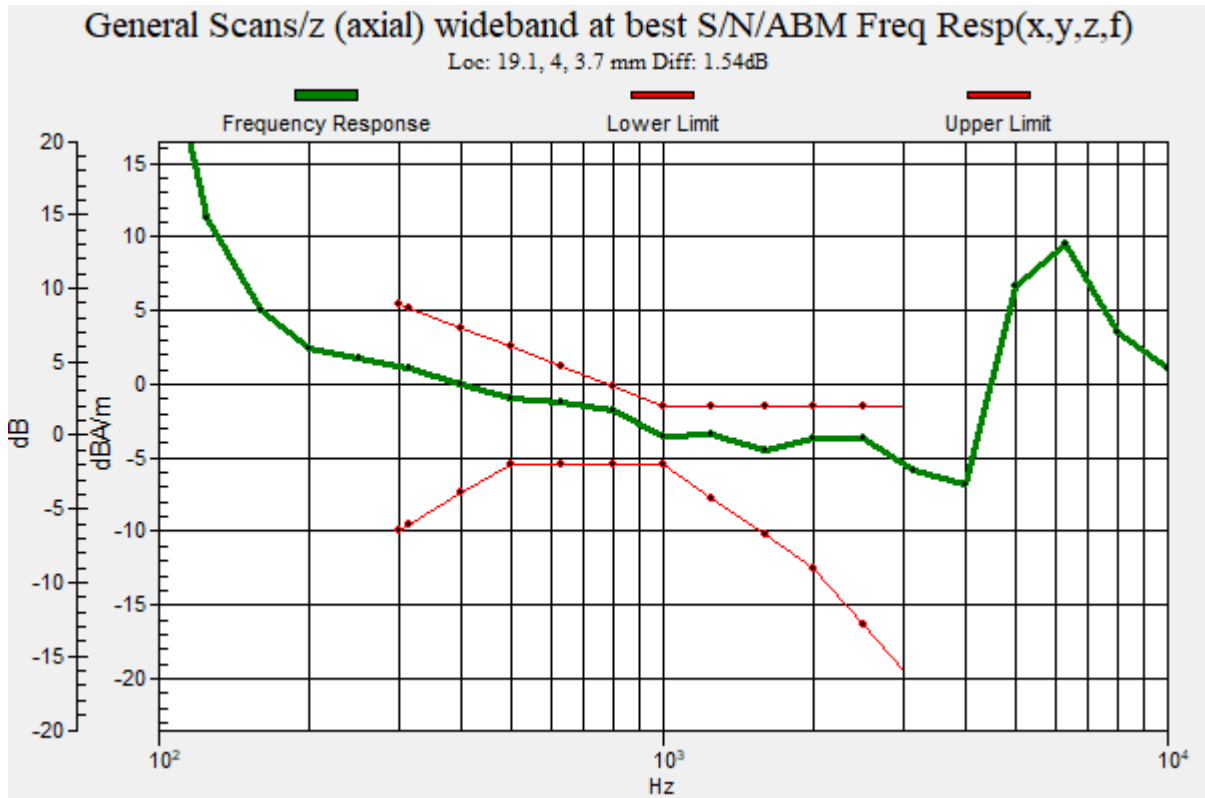

Plot No.60

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 38750ch 2 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -5.22 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -39.73 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 34.50 dB

ABM1 comp = -5.22 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

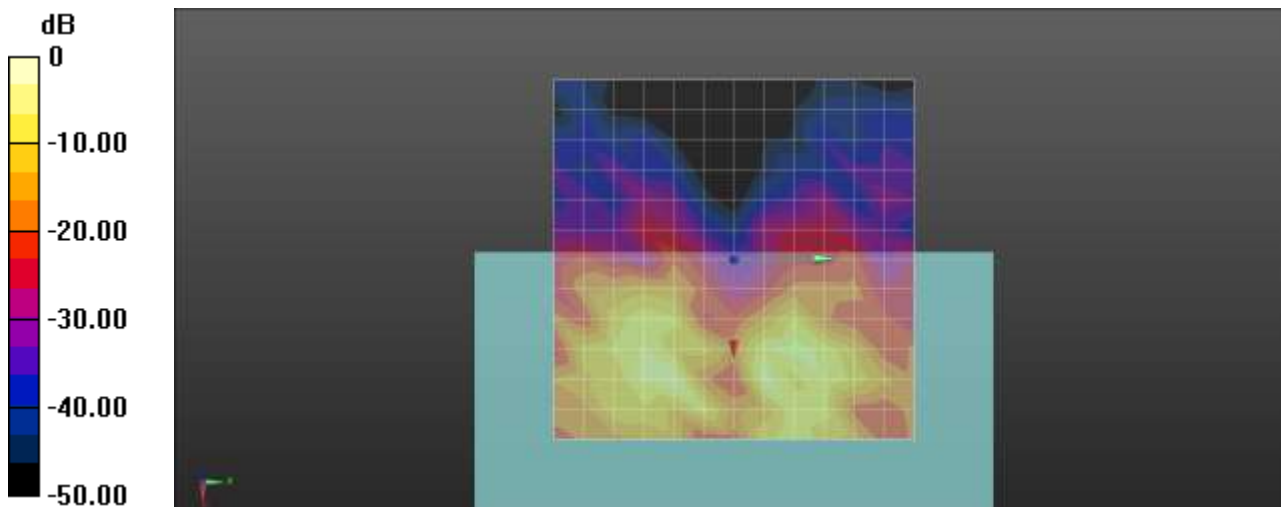

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.61

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 39200ch 2 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.63 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -31.24 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 32.87 dB

ABM1 comp = 1.63 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

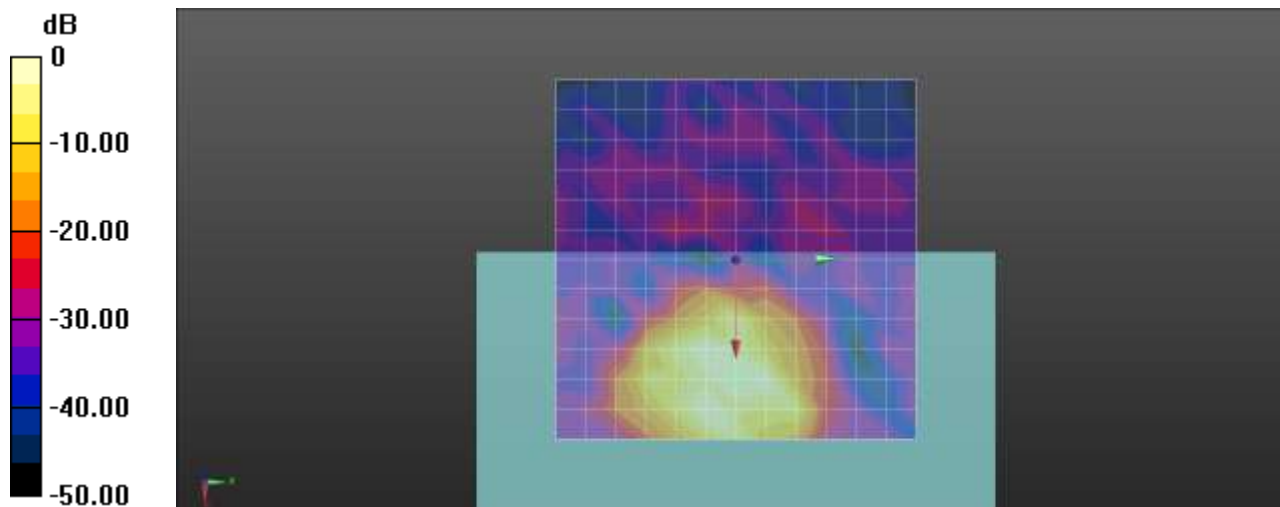

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.62

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 39200ch 2 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 56.27

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.33 dB

BWC Factor = 9.47 dB

Location: 16.5, 1.3, 3.7 mm

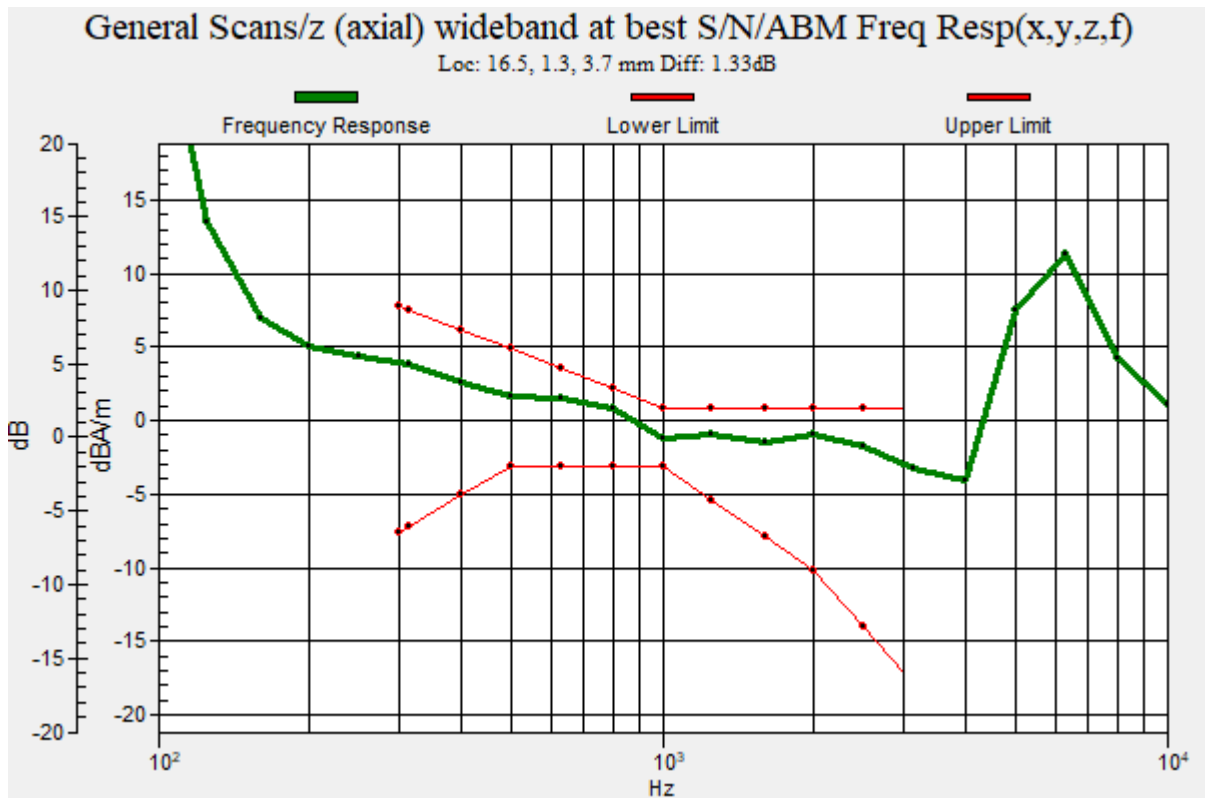

Plot No.63

LTE 40 QPSK EVS wb 5_9bitrate 10MHz 50RB 0offset 39200ch 2 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 26.18

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -8.20 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 8.3, 3.7 mm

Cursor:

ABM2 = -42.57 dBA/m

Location: 8.3, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 34.37 dB

ABM1 comp = -8.20 dBA/m

BWC Factor = 0.16 dB

Location: 8.3, 8.3, 3.7 mm

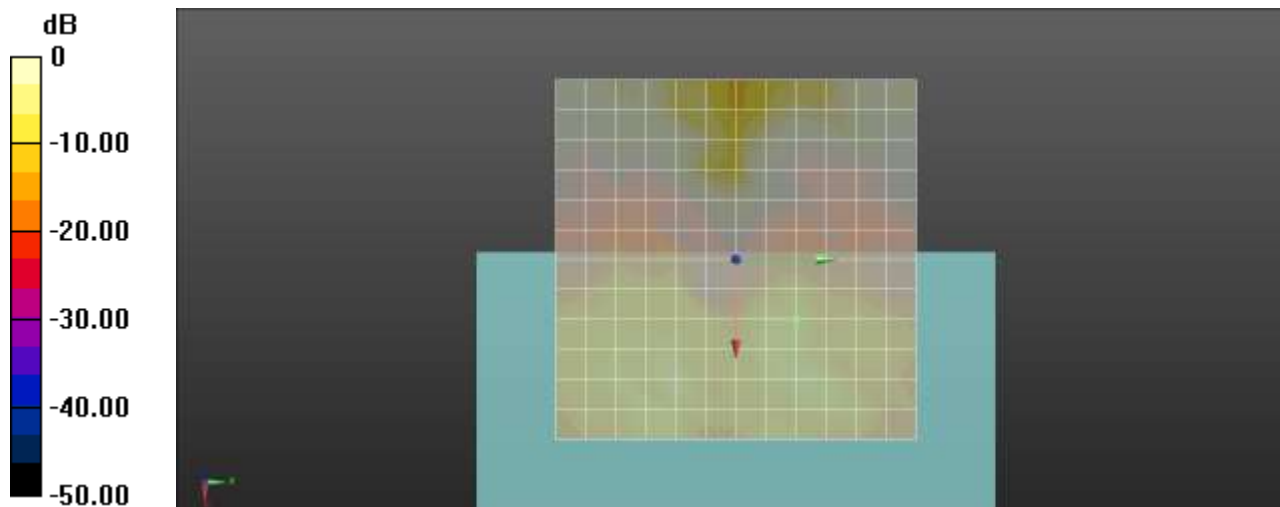

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.64

802_11b 1Mbps 6ch EVS WB 5_9 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 4.30 dBA/m

BWC Factor = 0.15 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -24.07 dBA/m

Location: 16.7, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 28.37 dB

ABM1 comp = 4.30 dBA/m

BWC Factor = 0.15 dB

Location: 16.7, 4.2, 3.7 mm

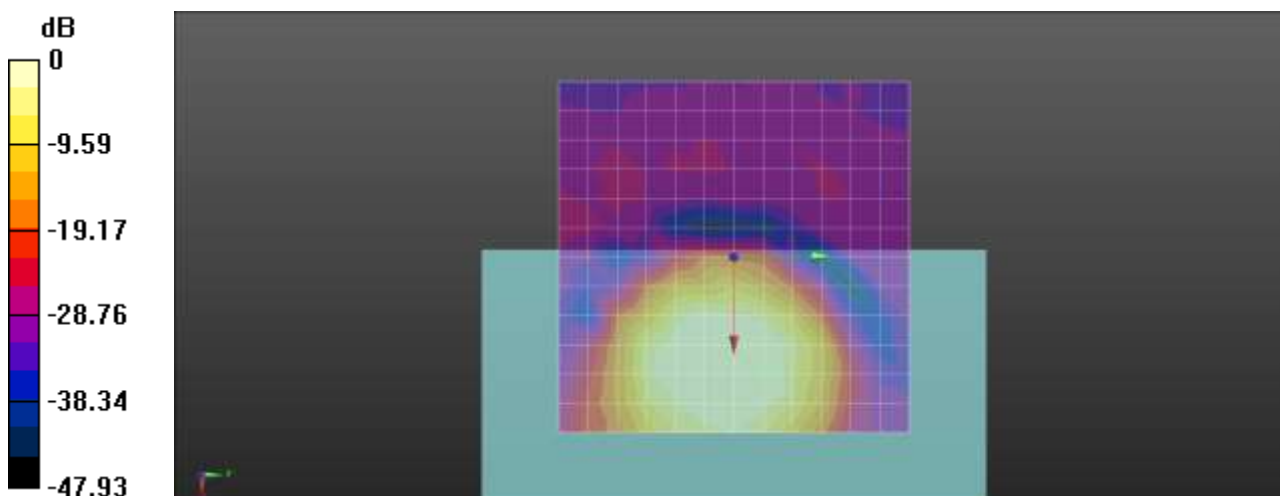

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.65

802_11b 1Mbps 6ch EVS WB 5_9 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 15.2, 4.1, 3.7 mm

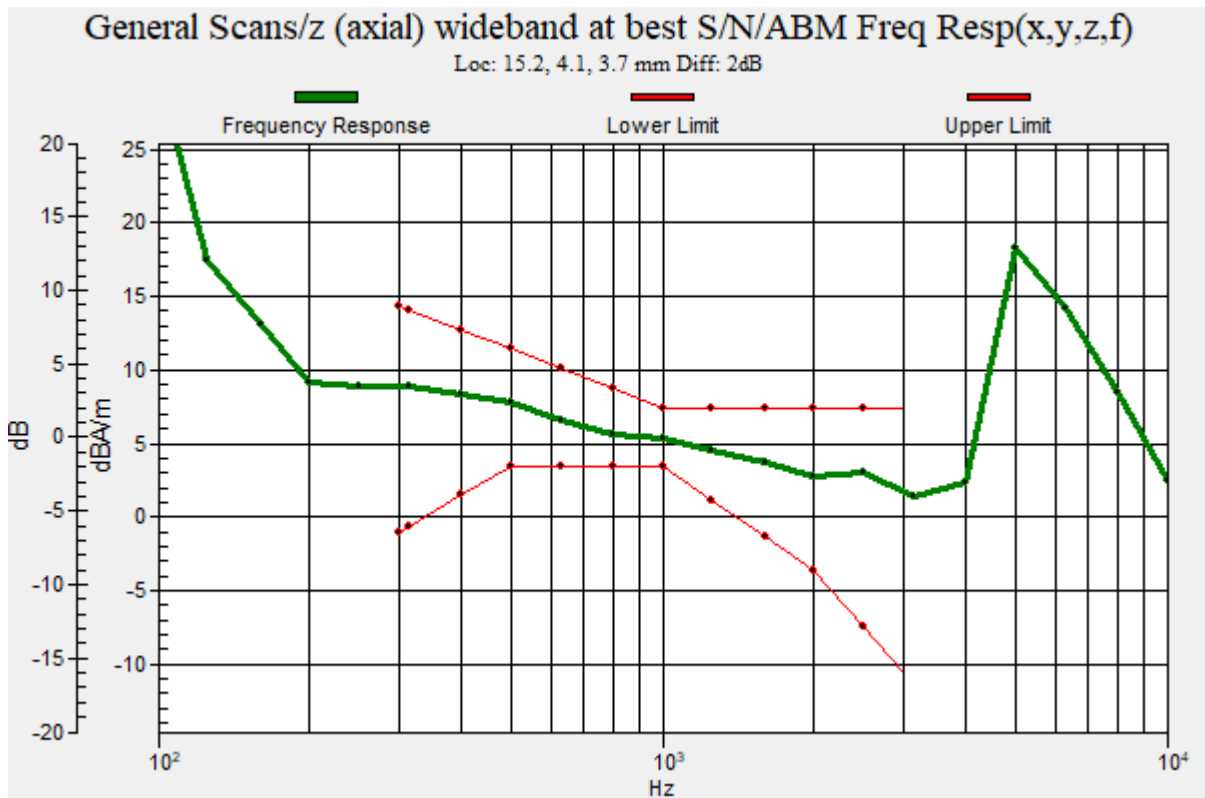

Plot No.66

802_11b 1Mbps 6ch EVS WB 5_9 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.15 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -7.10 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, 4.2, 3.7 mm

Cursor:

ABM2 = -30.52 dBA/m

Location: 8.3, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 23.42 dB

ABM1 comp = -7.10 dBA/m

BWC Factor = 0.15 dB

Location: 8.3, 4.2, 3.7 mm

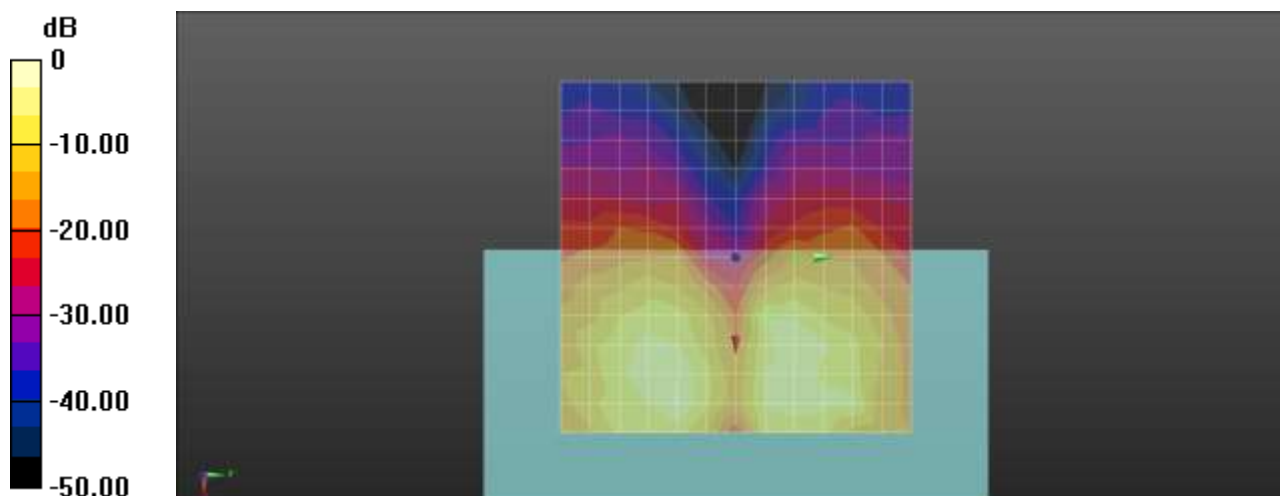

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.67

802_11n20 MCS3 40ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 4.81 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

Cursor:

ABM2 = -21.78 dBA/m

Location: 12.5, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 26.59 dB

ABM1 comp = 4.81 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

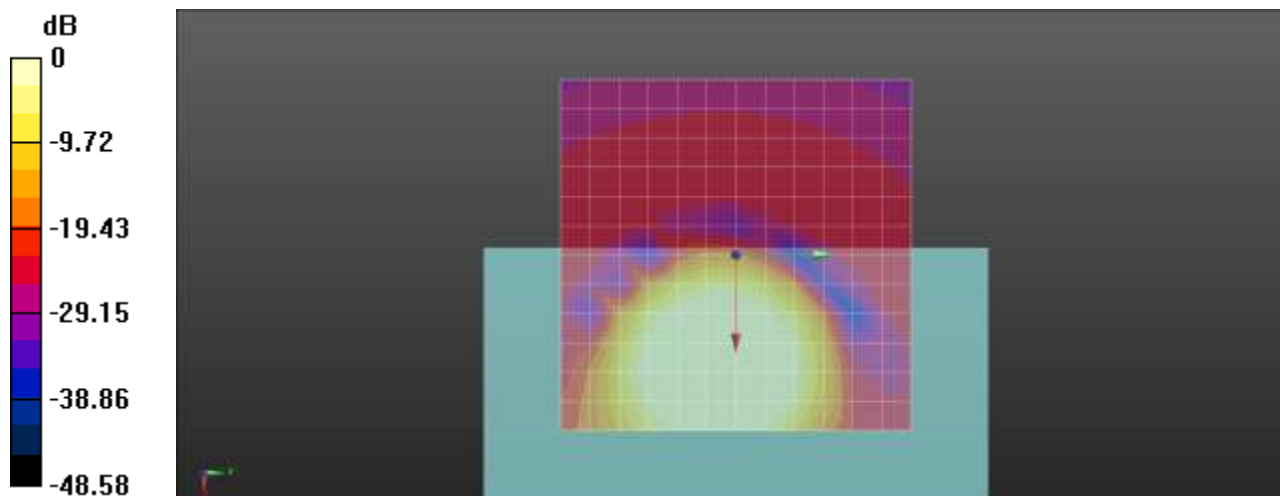

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.68

802_11n20 MCS3 40ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.56 dB

BWC Factor = 9.48 dB

Location: 11.5, -7, 3.7 mm

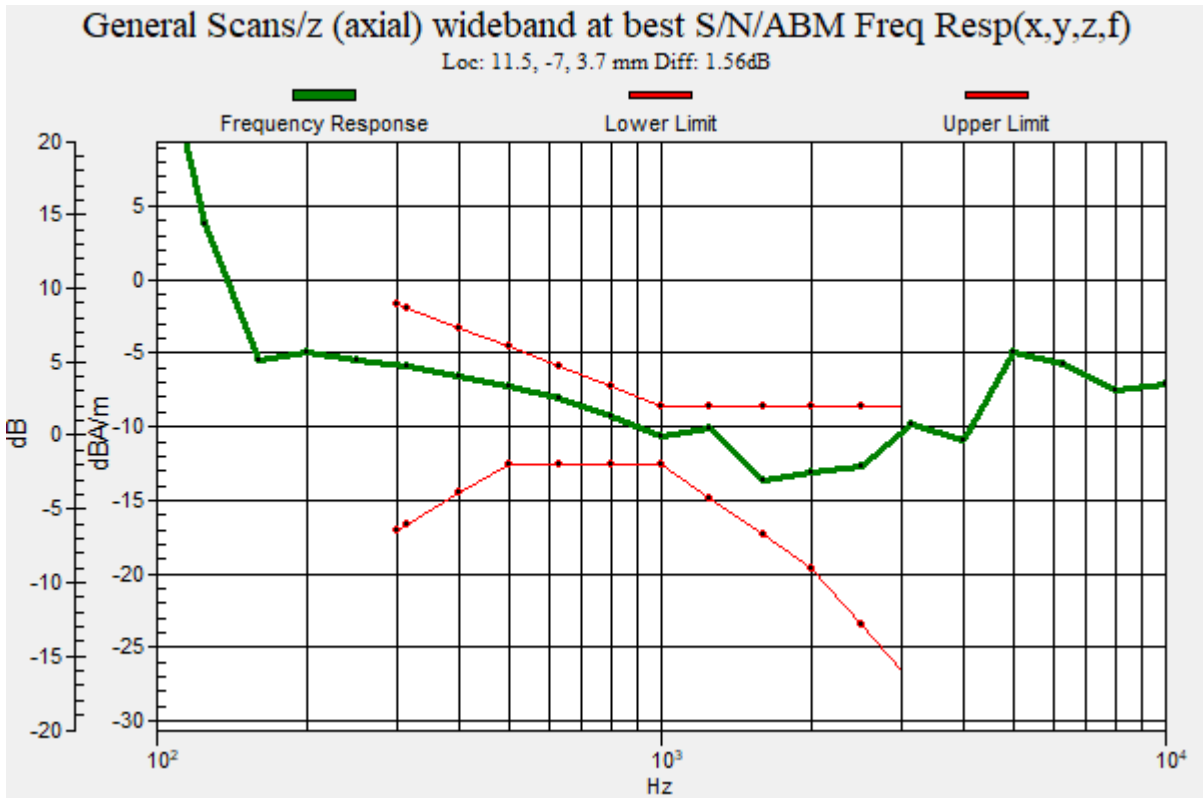

Plot No.69

802_11n20 MCS3 40ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 m

Cursor:

ABM1 comp = -9.53 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 8.3, 3.7 mm

Cursor:

ABM2 = -34.86 dBA/m

Location: 4.2, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 25.33 dB

ABM1 comp = -9.53 dBA/m

BWC Factor = 0.16 dB

Location: 4.2, 8.3, 3.7 mm

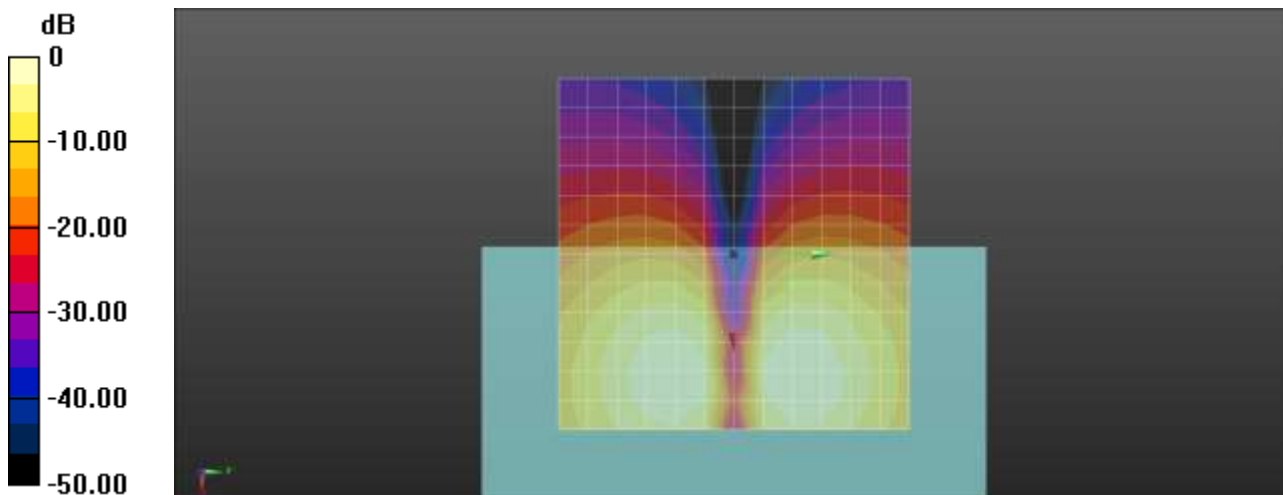

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.70

802_11n20 MCS3 36ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 3.23 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -8.3, 3.7 mm

Cursor:

ABM2 = -24.53 dBA/m

Location: 16.7, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 27.76 dB

ABM1 comp = 3.23 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -8.3, 3.7 mm

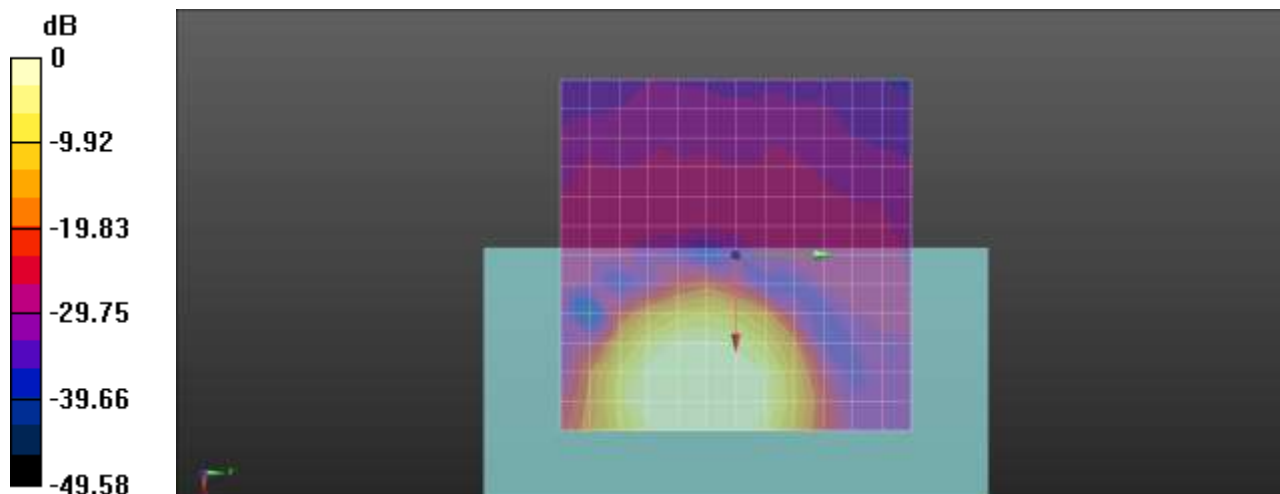

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.71

802_11n20 MCS3 36ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.47 dB

BWC Factor = 9.48 dB

Location: 18.6, -7.5, 3.7 mm

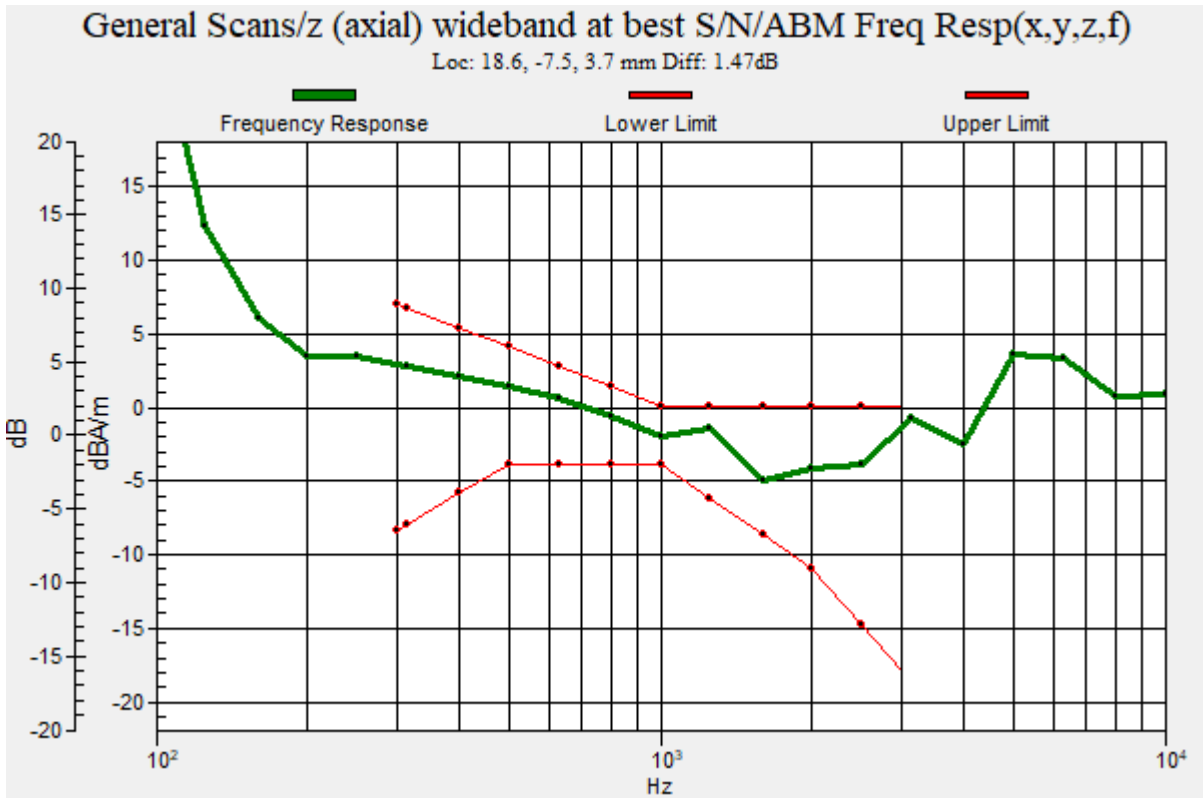

Plot No.72

802_11n20 MCS3 36ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -2.96 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

Cursor:

ABM2 = -29.95 dBA/m

Location: 16.7, 4.2, 3.7 mm



Cursor:

ABM1/ABM2 = 26.98 dB

ABM1 comp = -2.96 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 4.2, 3.7 mm

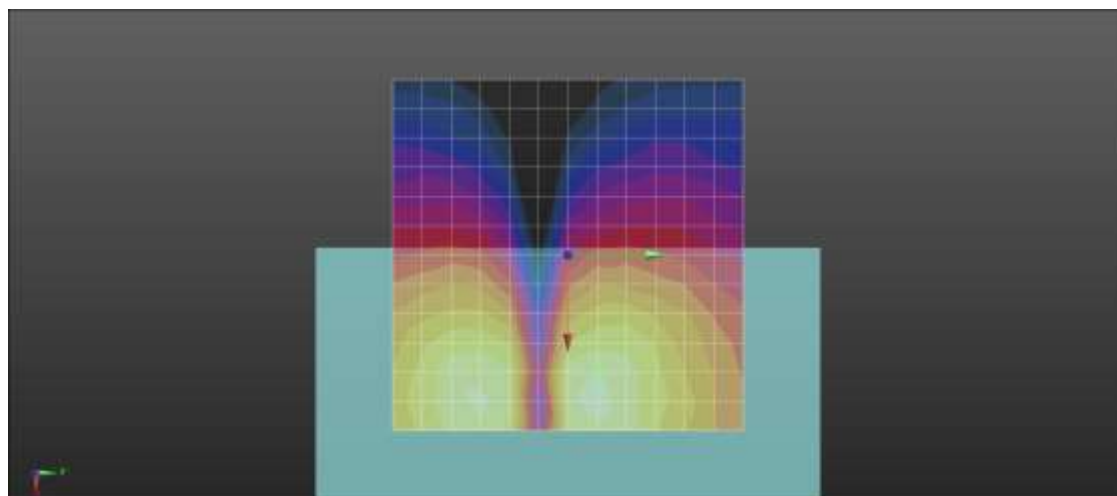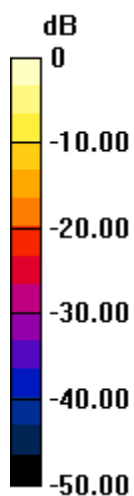

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.73

802_11n20 MCS3 48ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.93 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -25.63 dBA/m

Location: 16.7, 0, 3.7 mm



Cursor:

ABM1/ABM2 = 27.57 dB

ABM1 comp = 1.93 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

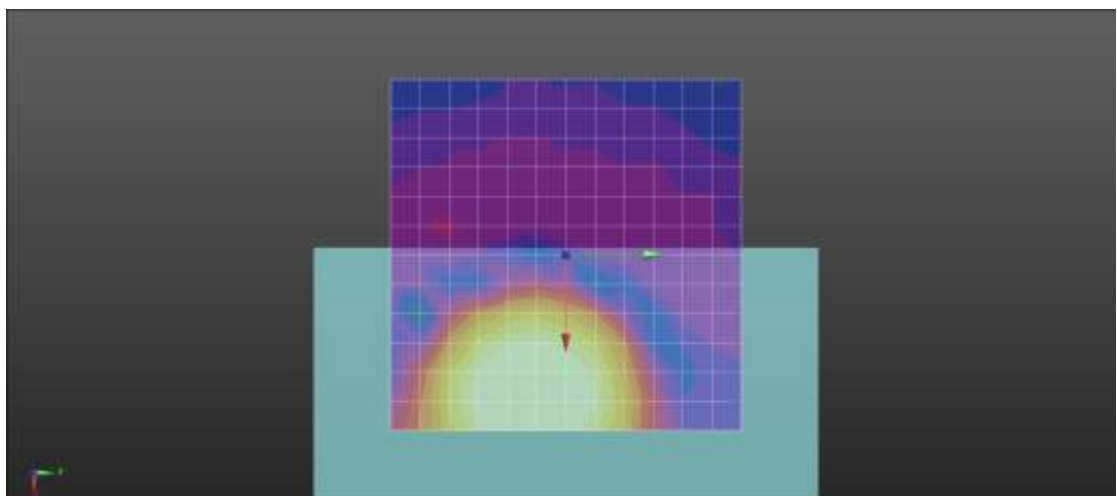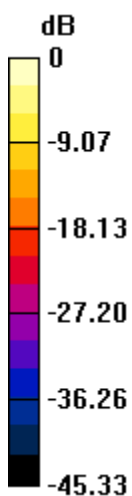

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.74

802_11n20 MCS3 48ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.52 dB

BWC Factor = 9.48 dB

Location: 17.7, 0.1, 3.7 mm

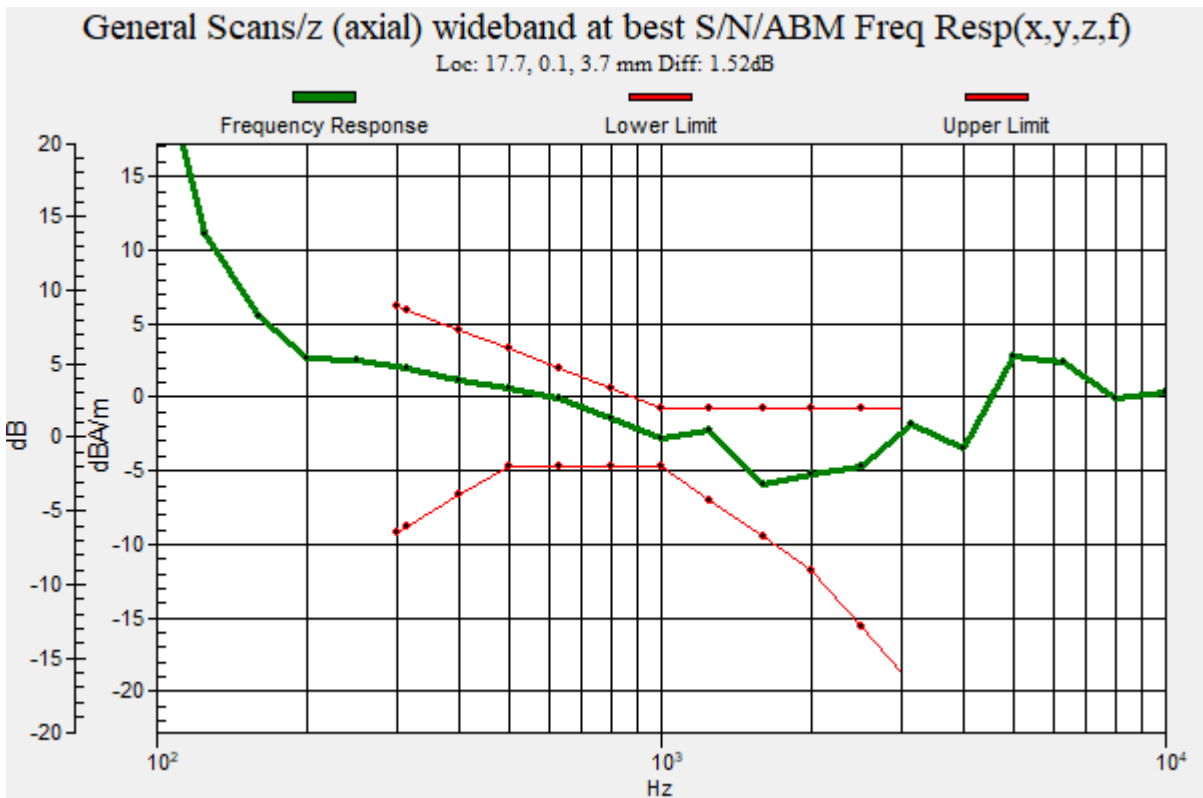

Plot No.75

802_11n20 MCS3 48ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -6.82 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -35.58 dBA/m

Location: 12.5, 4.2, 3.7 mm



Cursor:

ABM1/ABM2 = 28.76 dB

ABM1 comp = -6.82 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

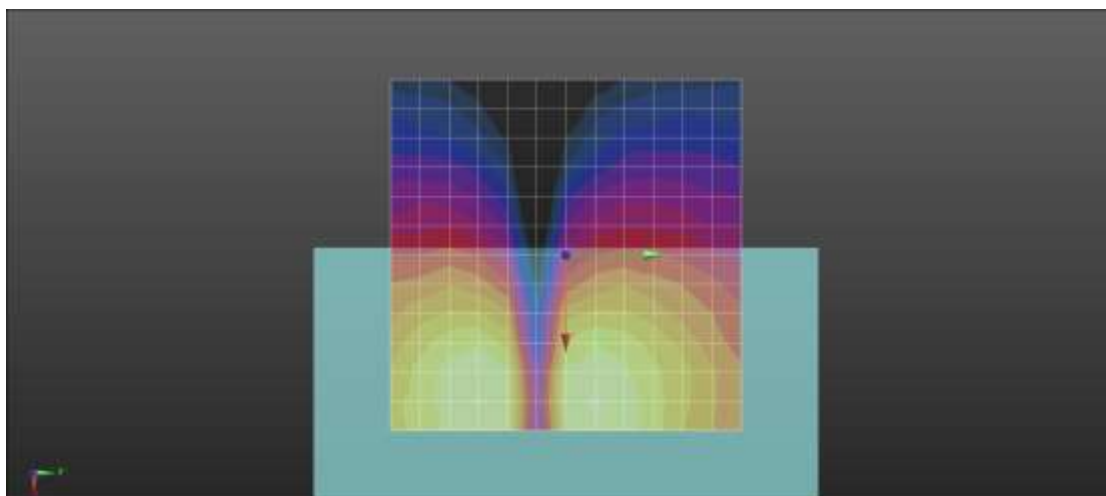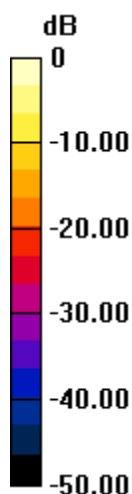

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.76

802_11n20 MCS3 56ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

Cursor:

ABM2 = -28.07 dBA/m

Location: 12.5, -4.2, 3.7 mm



Cursor:

ABM1/ABM2 = 27.21 dB

ABM1 comp = -0.86 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -4.2, 3.7 mm

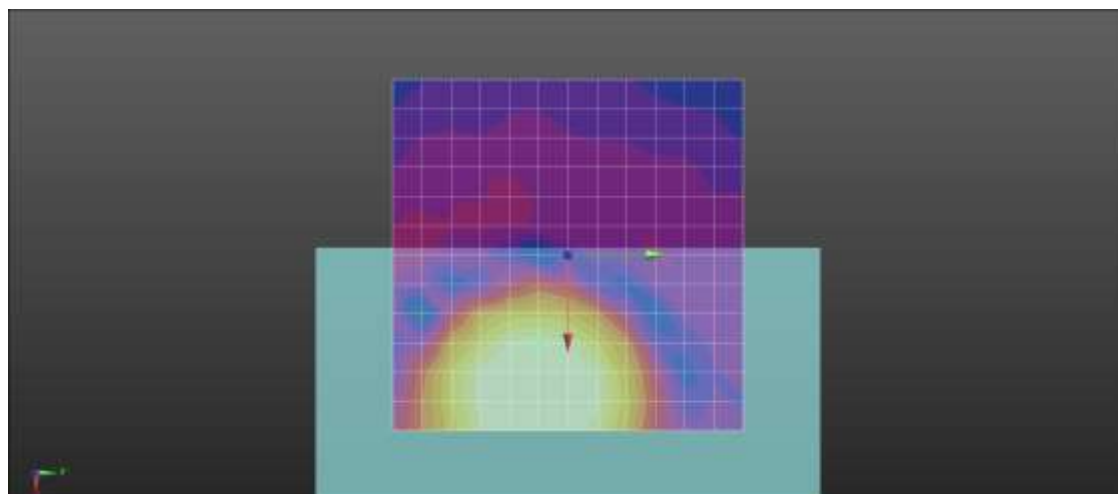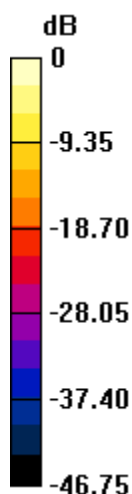

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.77

802_11n20 MCS3 56ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.62 dB

BWC Factor = 9.48 dB

Location: 13, -6.6, 3.7 mm

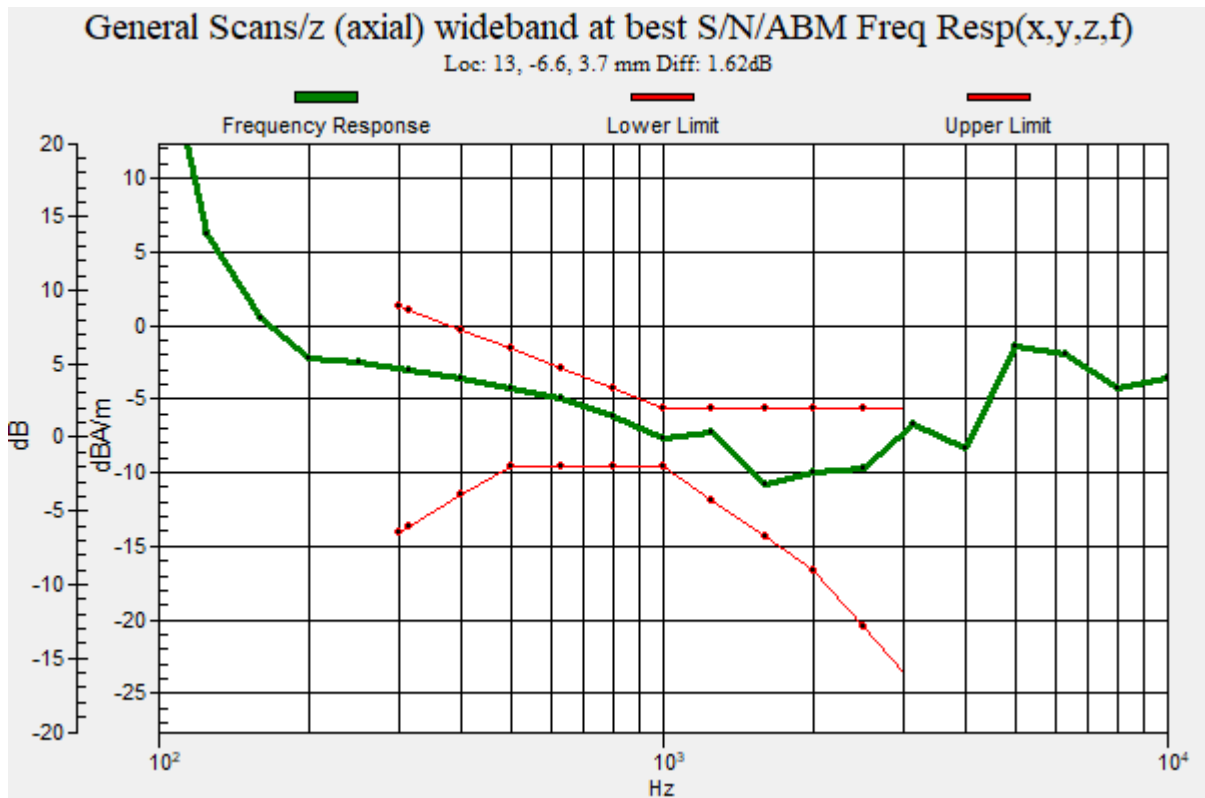

Plot No.78

802_11n20 MCS3 56ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -4.54 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -31.05 dBA/m

Location: 16.7, 8.3, 3.7 mm



Cursor:

ABM1/ABM2 = 26.51 dB

ABM1 comp = -4.54 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

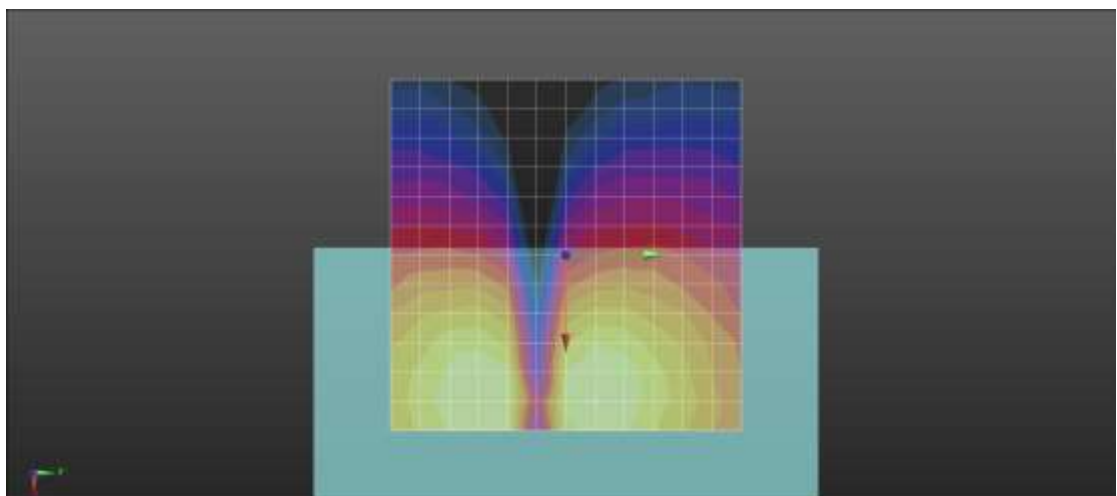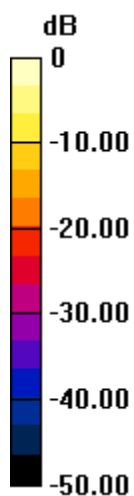

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.79

802_11n20 MCS3 120ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 3.60 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -8.3, 3.7 mm

Cursor:

ABM2 = -24.15 dBA/m

Location: 16.7, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 27.75 dB

ABM1 comp = 3.60 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -8.3, 3.7 mm

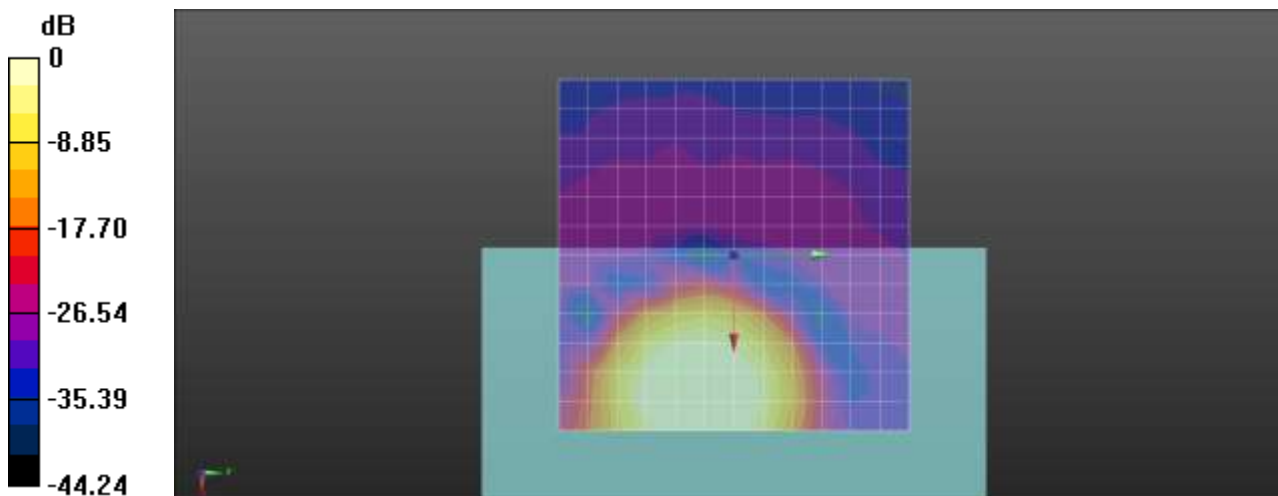

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.80

802_11n20 MCS3 120ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.44 dB

BWC Factor = 9.48 dB

Location: 16.5, -8, 3.7 mm

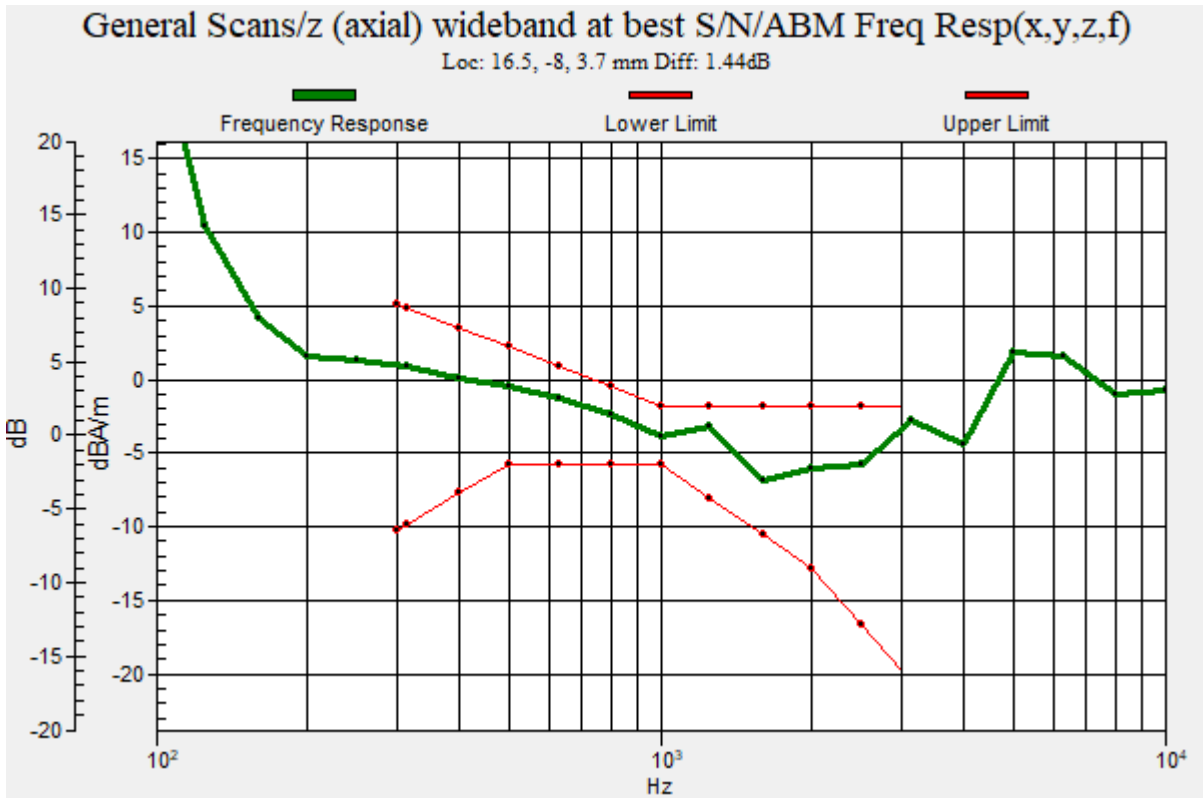

Plot No.81

802_11n20 MCS3 120ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -1.58 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 4.2, 3.7 mm

Cursor:

ABM2 = -28.29 dBA/m

Location: 20.8, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 26.70 dB

ABM1 comp = -1.58 dBA/m

BWC Factor = 0.16 dB

Location: 20.8, 4.2, 3.7 mm

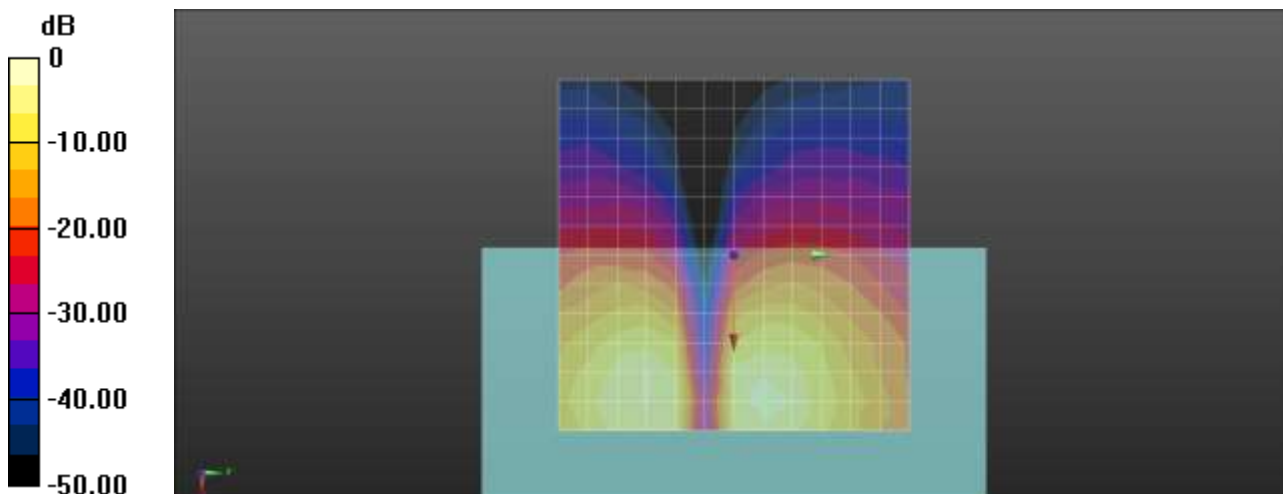

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.82

802_11n20 MCS3 157ch EVS SWB 9_6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -2.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

Cursor:

ABM2 = -29.88 dBA/m

Location: 12.5, -8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 27.79 dB

ABM1 comp = -2.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, -8.3, 3.7 mm

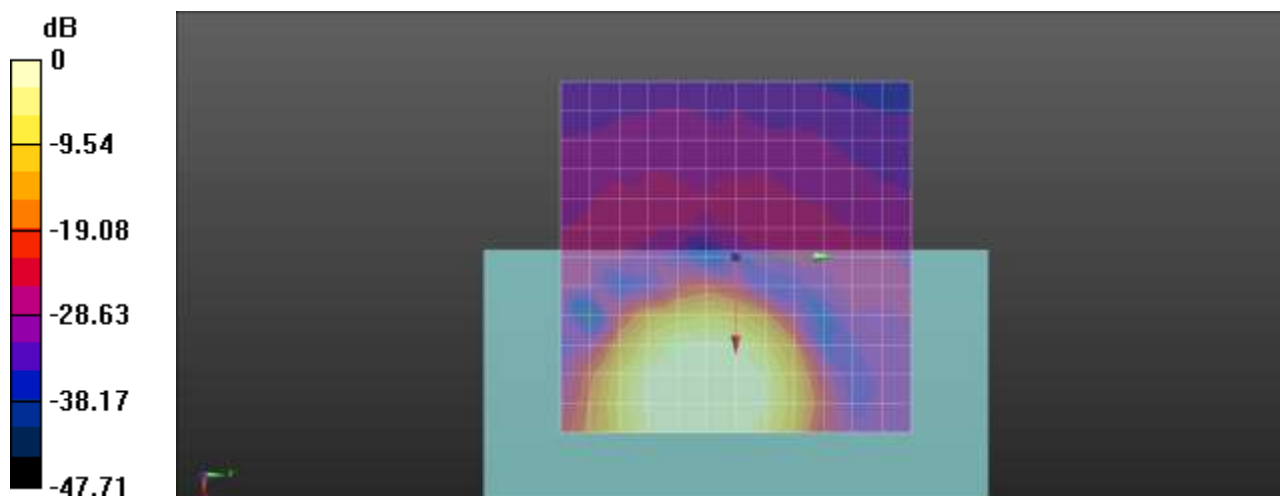

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.83

802_11n20 MCS3 157ch EVS SWB 9_6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 47.52

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.58 dB

BWC Factor = 9.48 dB

Location: 12.9, -8, 3.7 mm

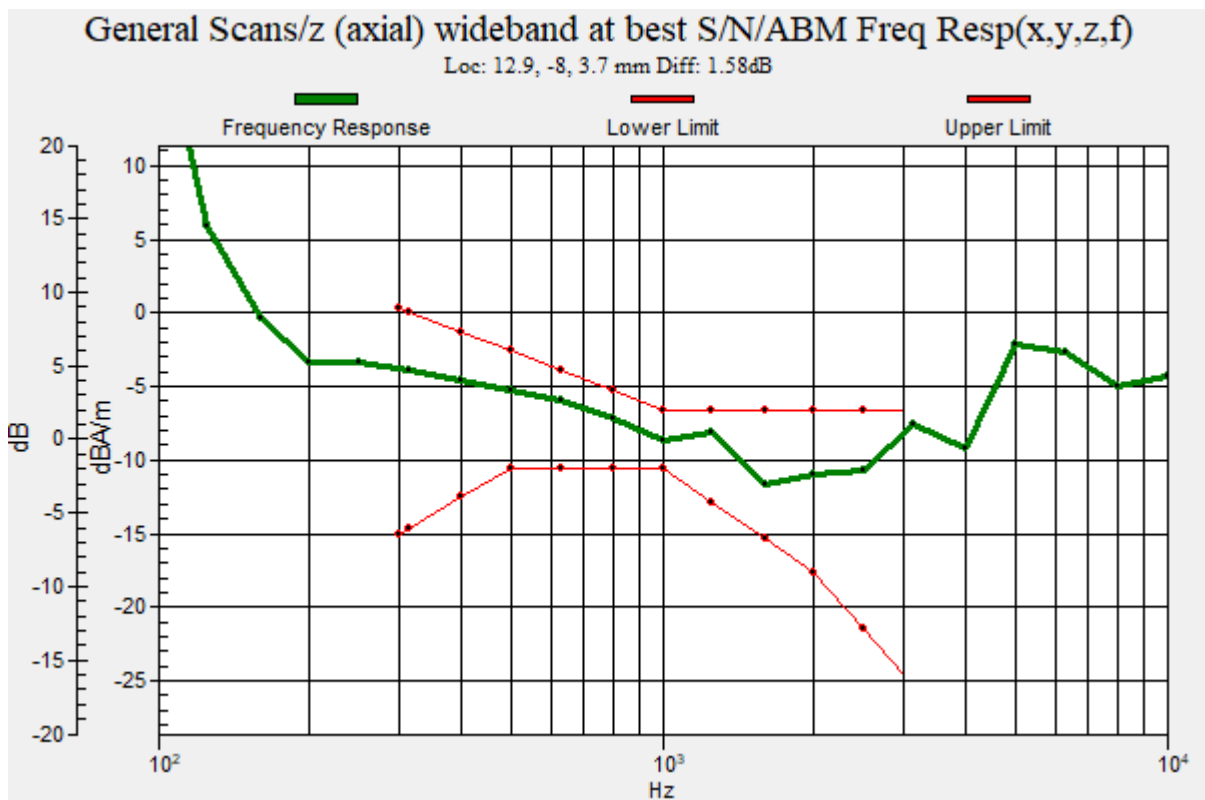

Plot No.84

802_11n20 MCS3 157ch EVS SWB 9_6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 15.66

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -6.03 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -33.36 dBA/m

Location: 12.5, 4.2, 3.7 mm



Cursor:

ABM1/ABM2 = 27.33 dB

ABM1 comp = -6.03 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

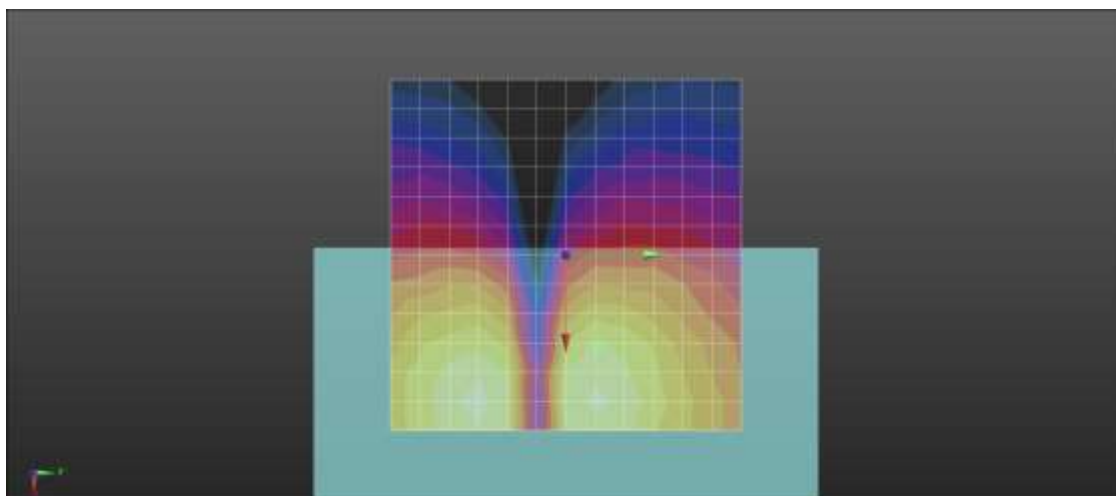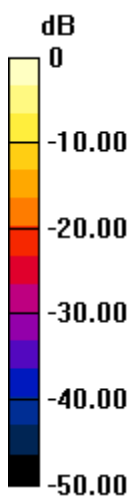

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.85

GSM850 Edge 2Tx 128ch Bitrate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 824.2 MHz;Duty Cycle: 1:4.14954

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 7.11 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -22.86 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 29.97 dB

ABM1 comp = 7.11 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

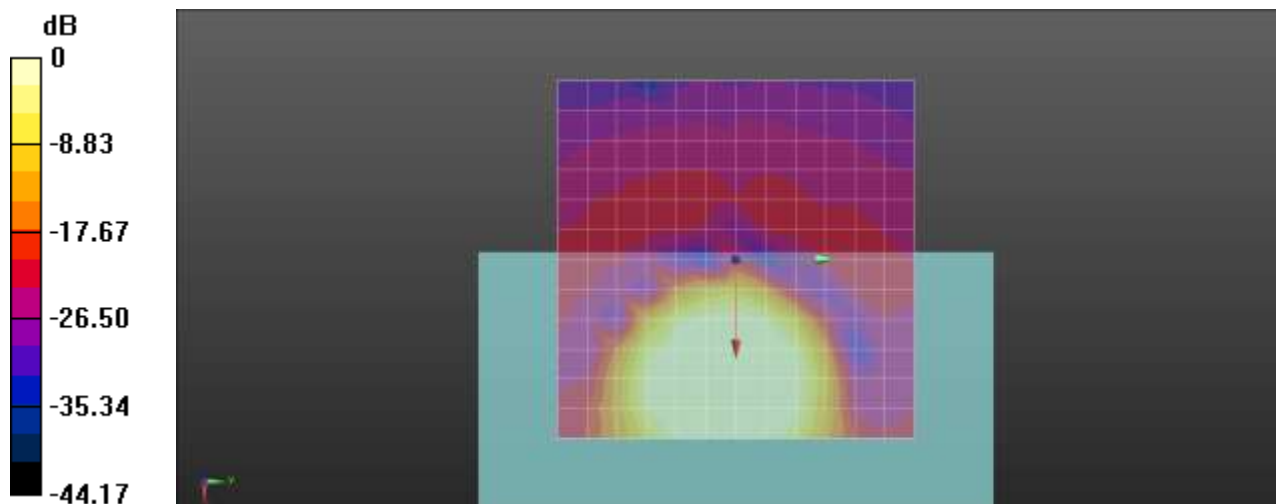

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.86

GSM850 Edge 2Tx 128ch Bitrate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 824.2 MHz;Duty Cycle: 1:4.14954
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 13.7, -0.8, 3.7 mm

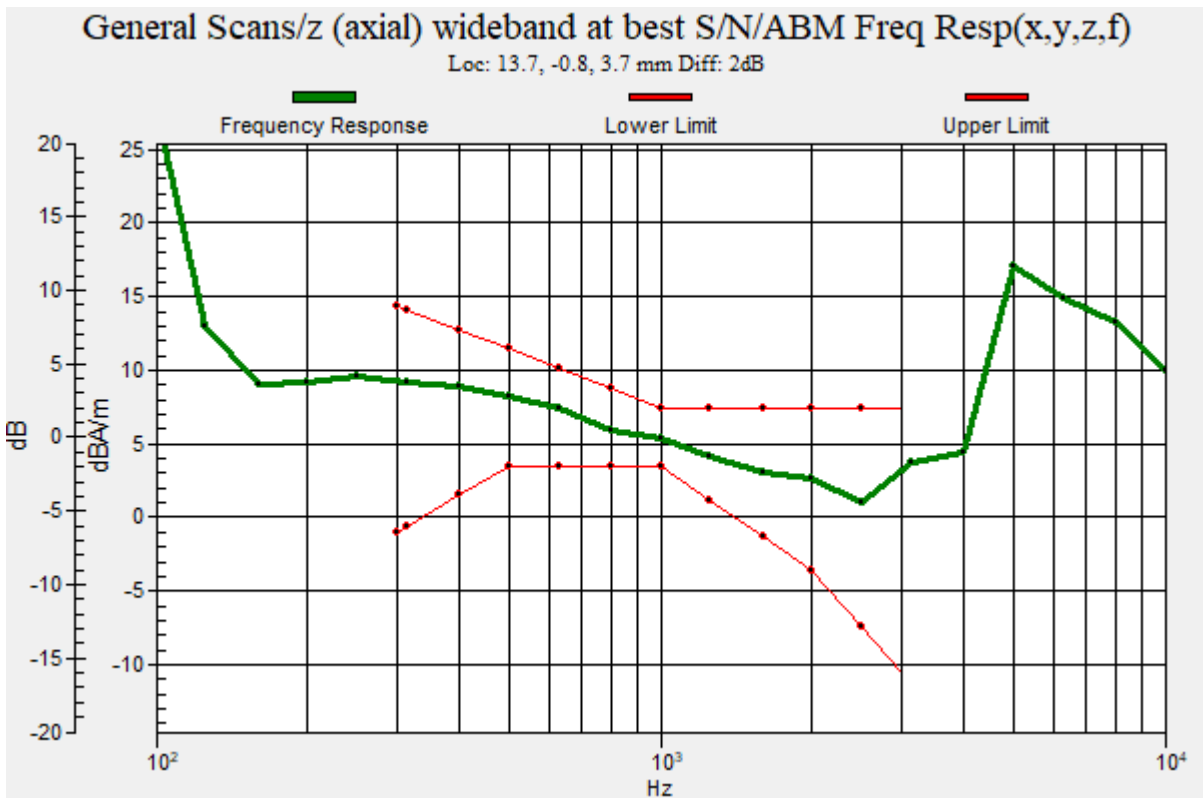

Plot No.87

GSM850 Edge 2Tx 128ch Bitrate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 850 (0); Frequency: 824.2 MHz;Duty Cycle: 1:4.14954
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.33 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -12.5, 3.7 mm

Cursor:

ABM2 = -34.44 dBA/m

Location: 16.7, -12.5, 3.7 mm


Cursor:

ABM1/ABM2 = 35.78 dB

ABM1 comp = 1.33 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -12.5, 3.7 mm

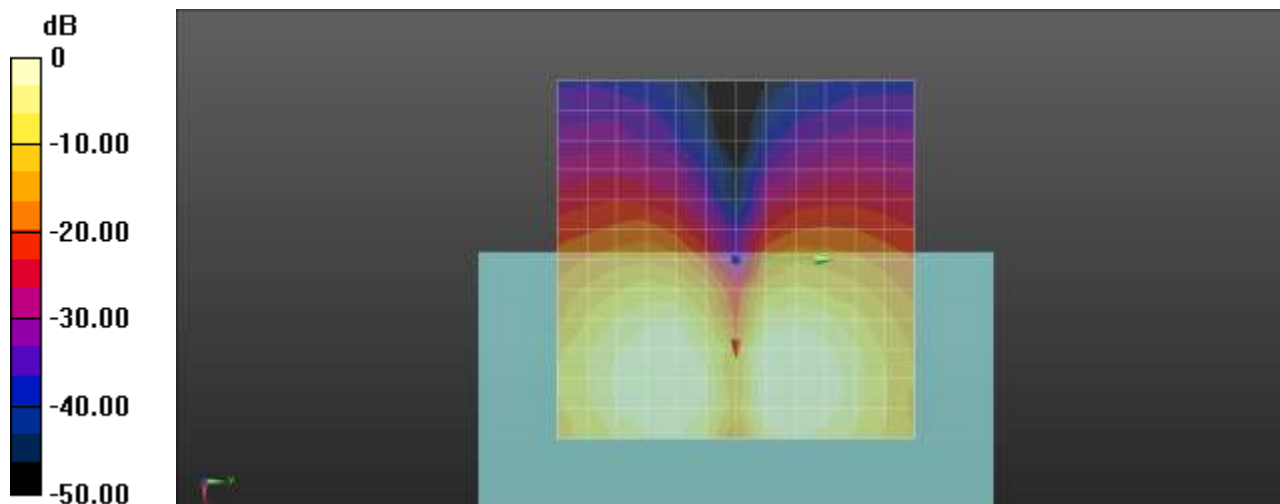

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.88

GSM1900 Edge 2Tx 661ch Bitrate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1880 MHz;Duty Cycle: 1:4.14954
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 8.34 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -28.42 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 36.76 dB

ABM1 comp = 8.34 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

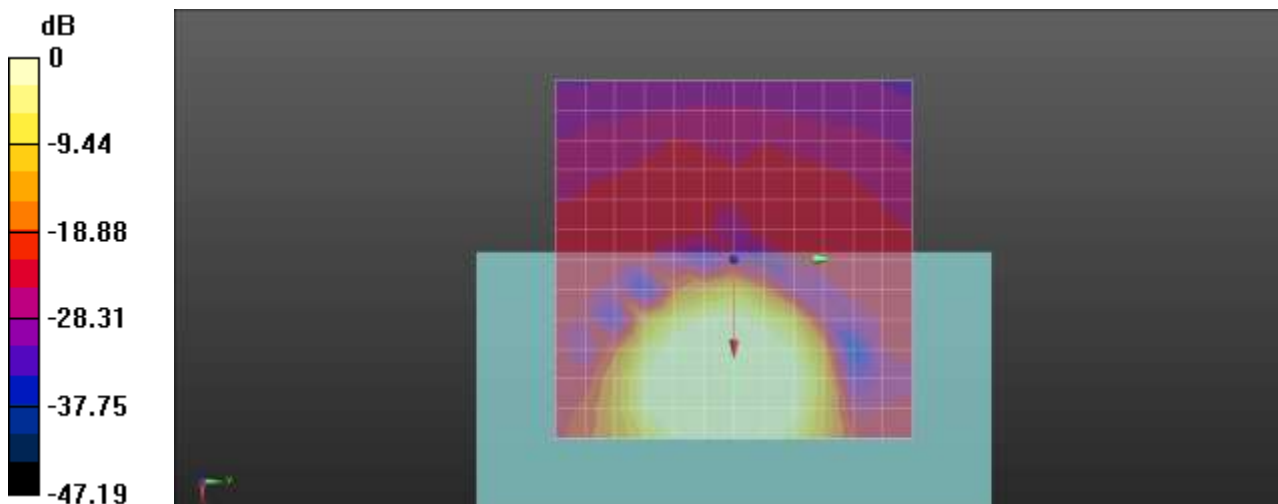

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.89

GSM1900 Edge 2Tx 661ch Bitrate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1880 MHz;Duty Cycle: 1:4.14954
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 16.4, -1.7, 3.7 mm

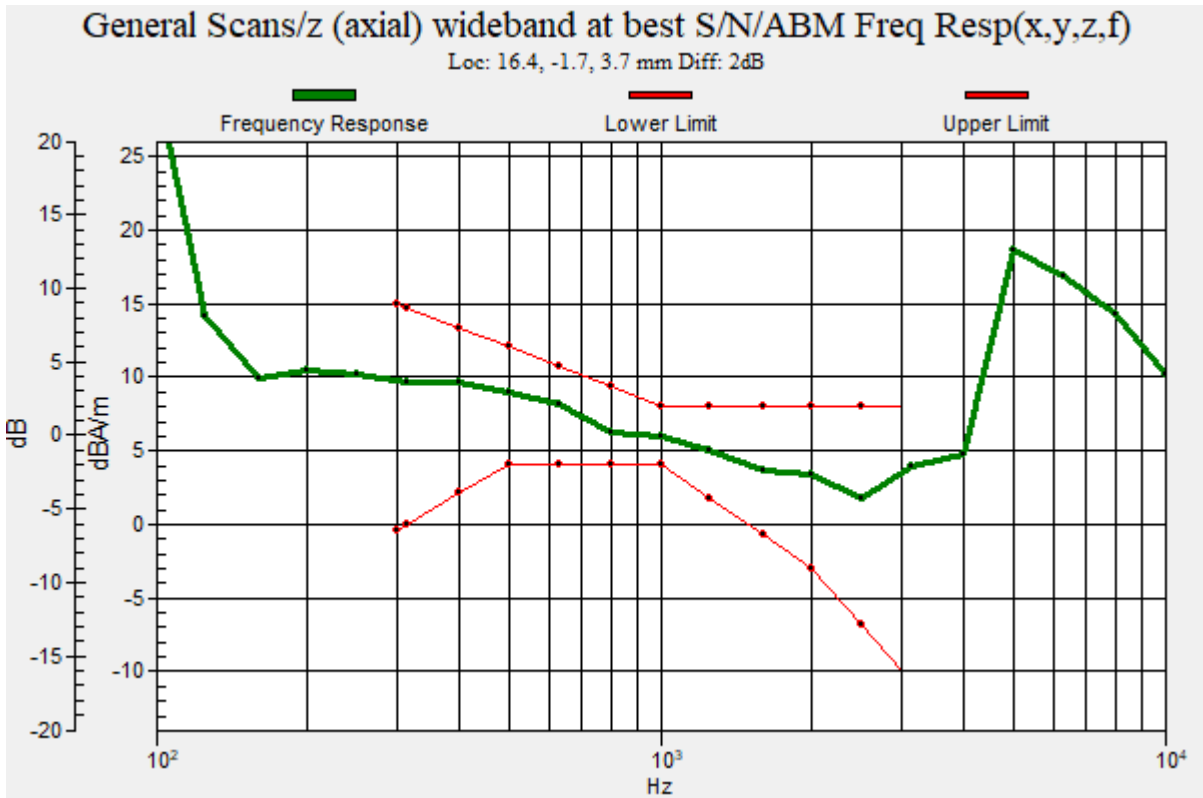

Plot No.90

GSM1900 Edge 2Tx 661ch Bitrate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, GSM 1900 2TX (0); Frequency: 1880 MHz;Duty Cycle: 1:4.14954
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 3000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = -0.38 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -35.57 dBA/m

Location: 12.5, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 35.19 dB

ABM1 comp = -0.38 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

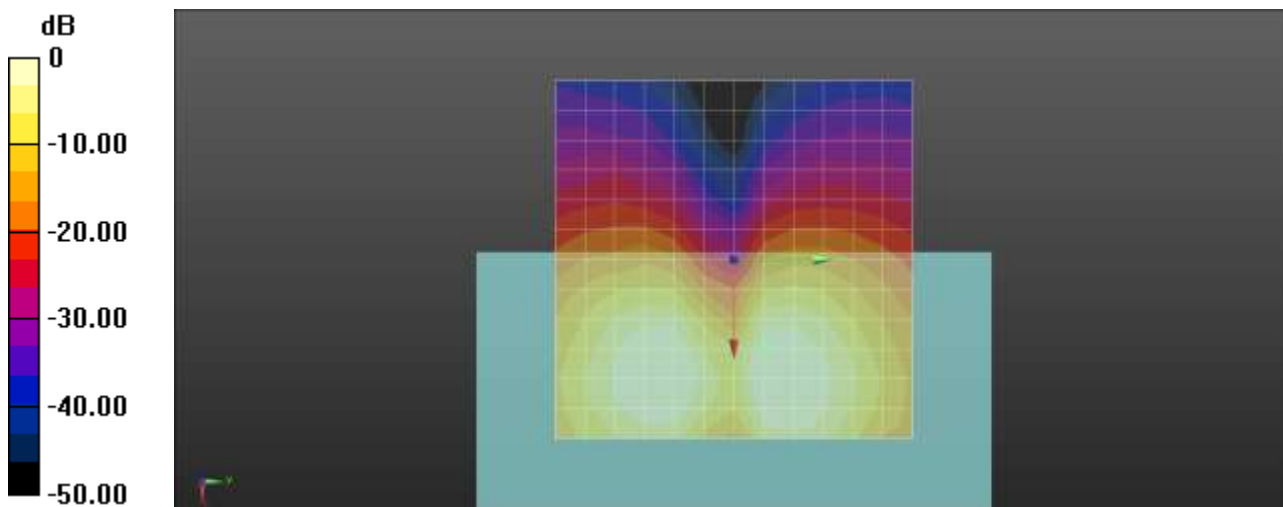

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.91

WCDMA Band 2 9400ch Bitrate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.06 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.56 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.61 dB

ABM1 comp = 9.06 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

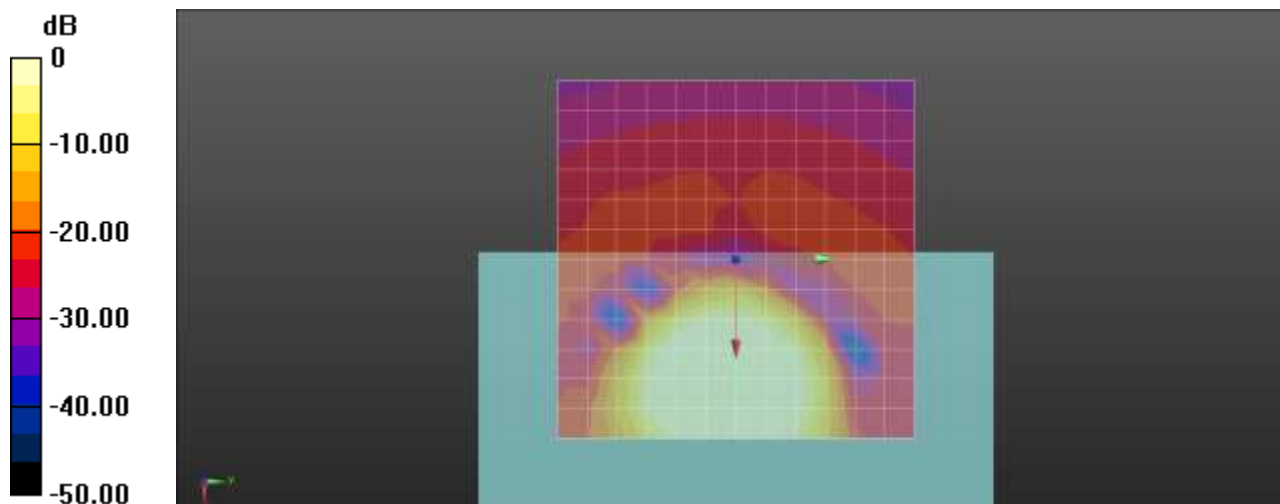

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.92

WCDMA Band 2 9400ch Bitrate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 16.4, -0.2, 3.7 mm

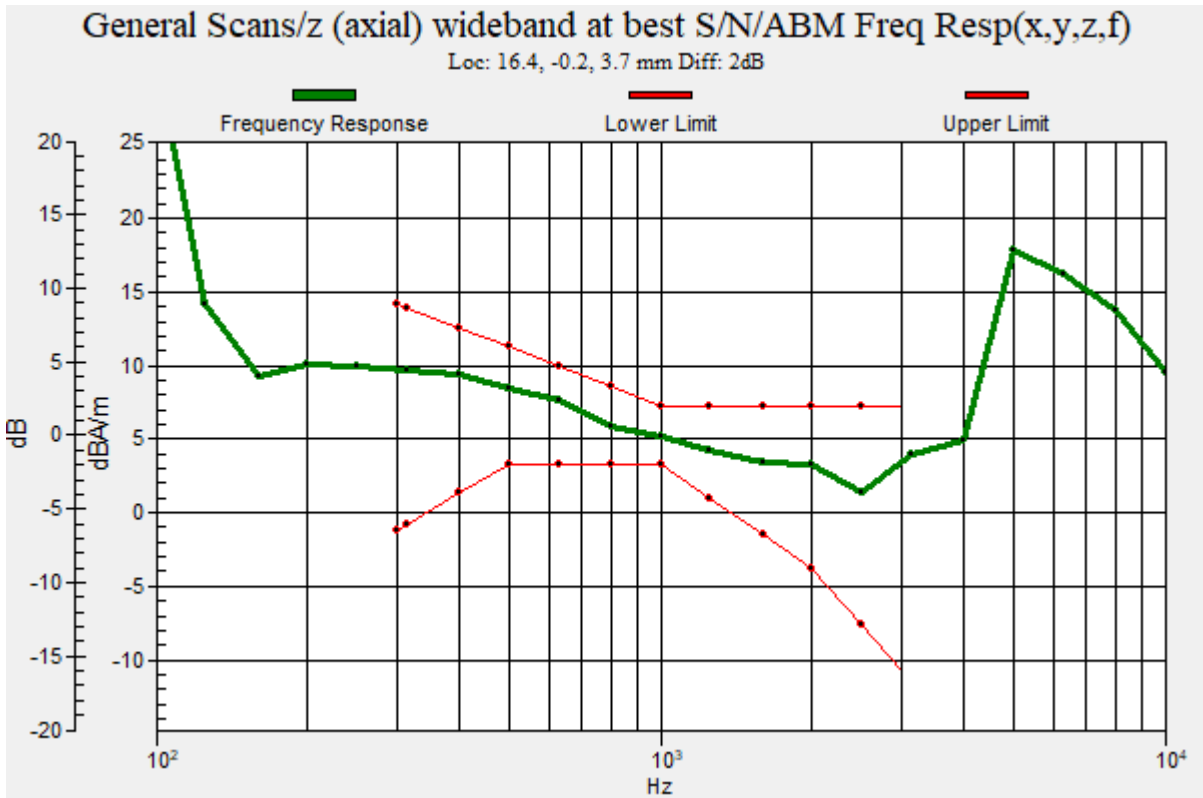

Plot No.93

WCDMA Band 2 9400ch Bitrate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA1900 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.91 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -42.94 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 44.85 dB

ABM1 comp = 1.91 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

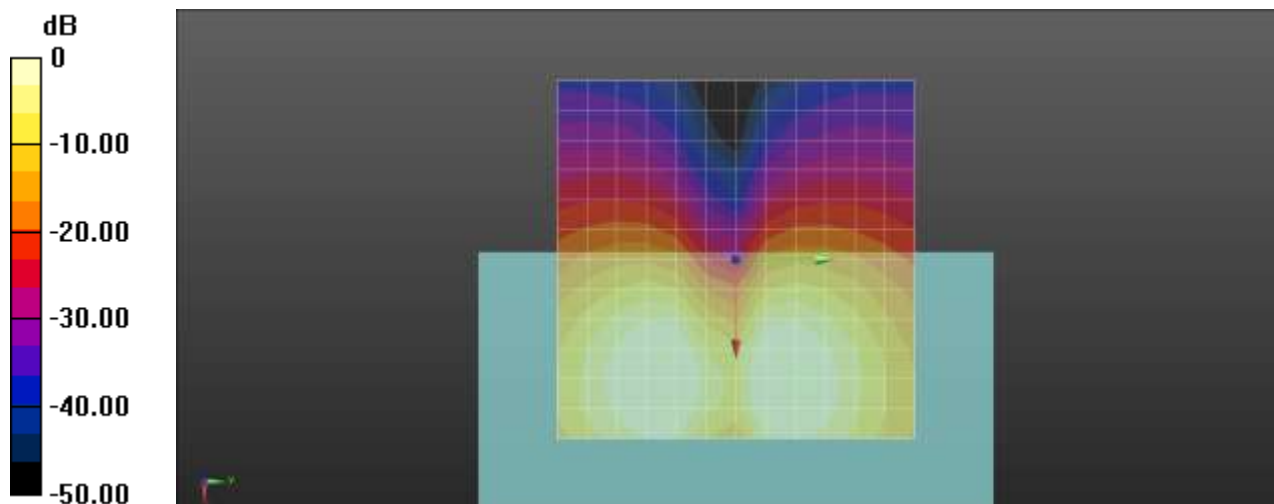

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.94

WCDMA Band 4 1412ch Bitrate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 8.99 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -40.89 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 49.88 dB

ABM1 comp = 8.99 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

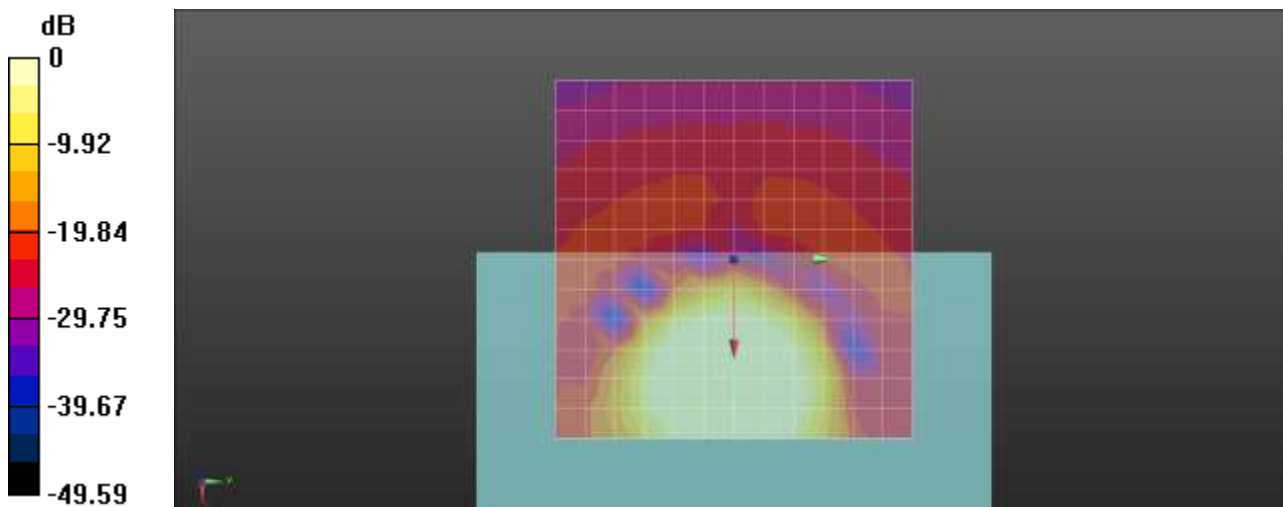

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.95

WCDMA Band 4 1412ch Bitrate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 15.9, 0.2, 3.7 mm

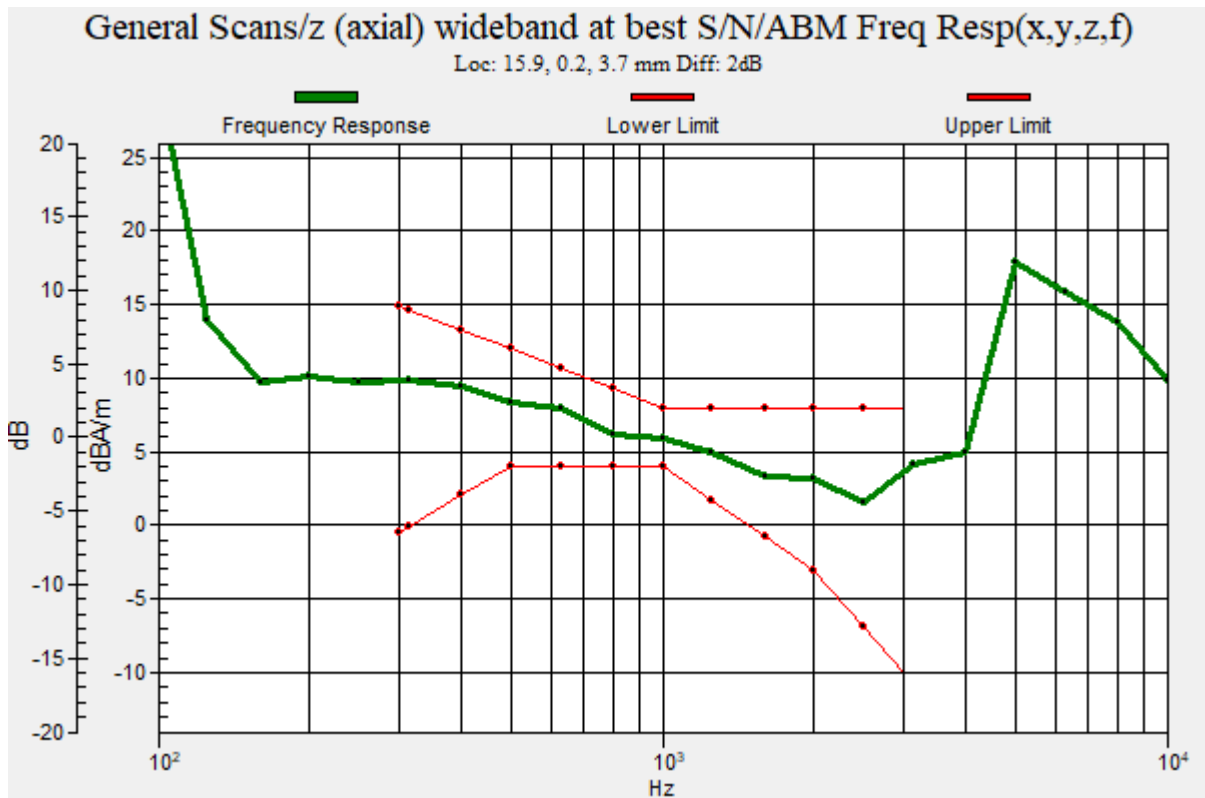

Plot No.96

WCDMA Band 4 1412ch Bitrate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA IV (0); Frequency: 1732.4 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -43.93 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 46.33 dB

ABM1 comp = 2.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

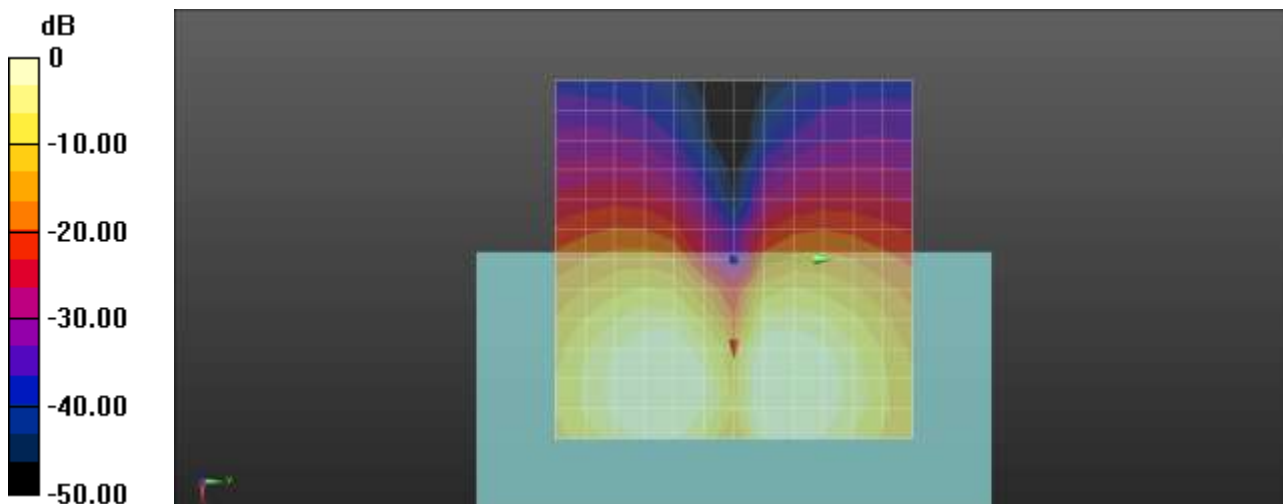

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.97

WCDMA Band 5 4183ch Bitrate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.12 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.91 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 52.03 dB

ABM1 comp = 9.12 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

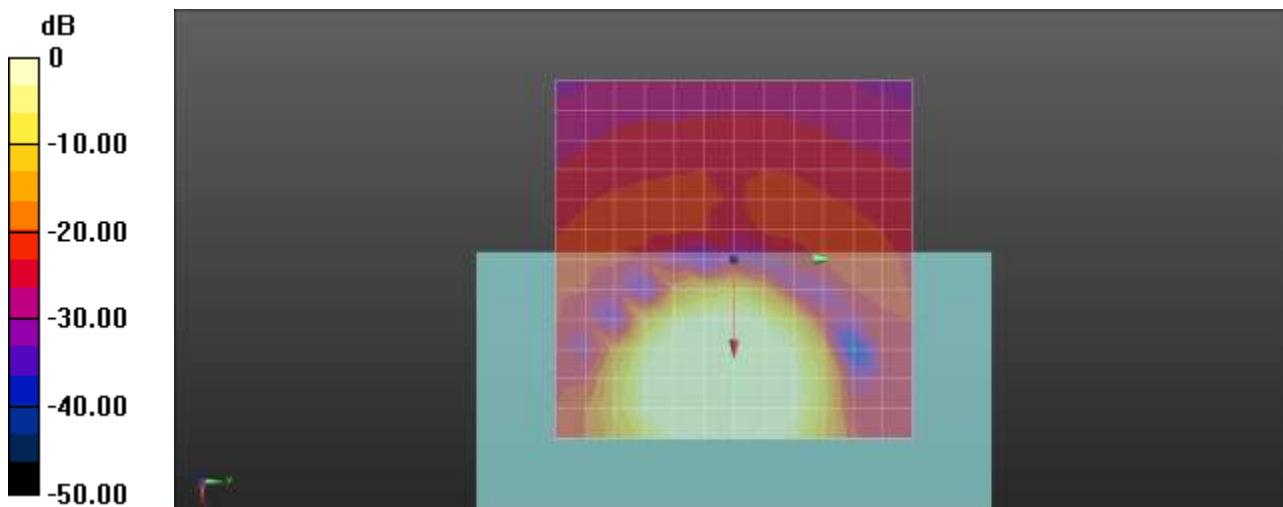

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.98

WCDMA Band 5 4183ch Bitrate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 16.2, -1, 3.7 mm

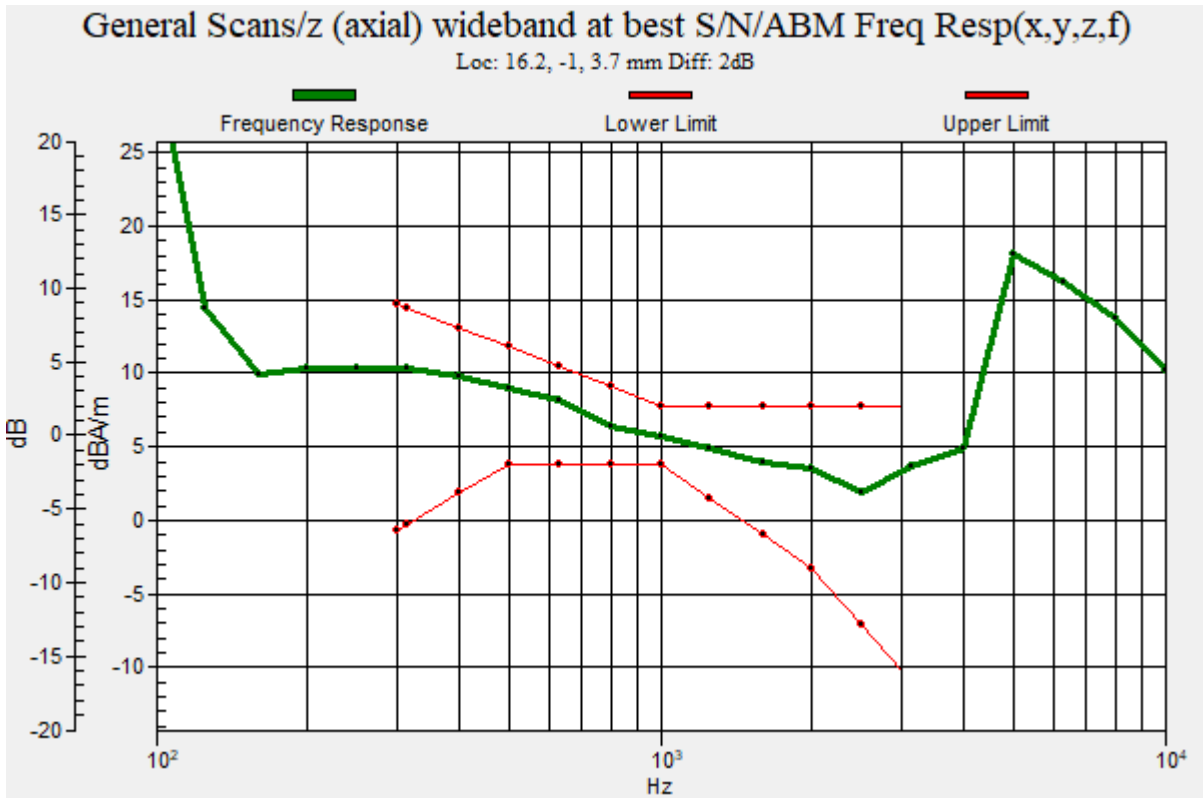

Plot No.99

WCDMA Band 5 4183ch Bitrate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WCDMA850 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.14 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -43.79 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.93 dB

ABM1 comp = 2.14 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

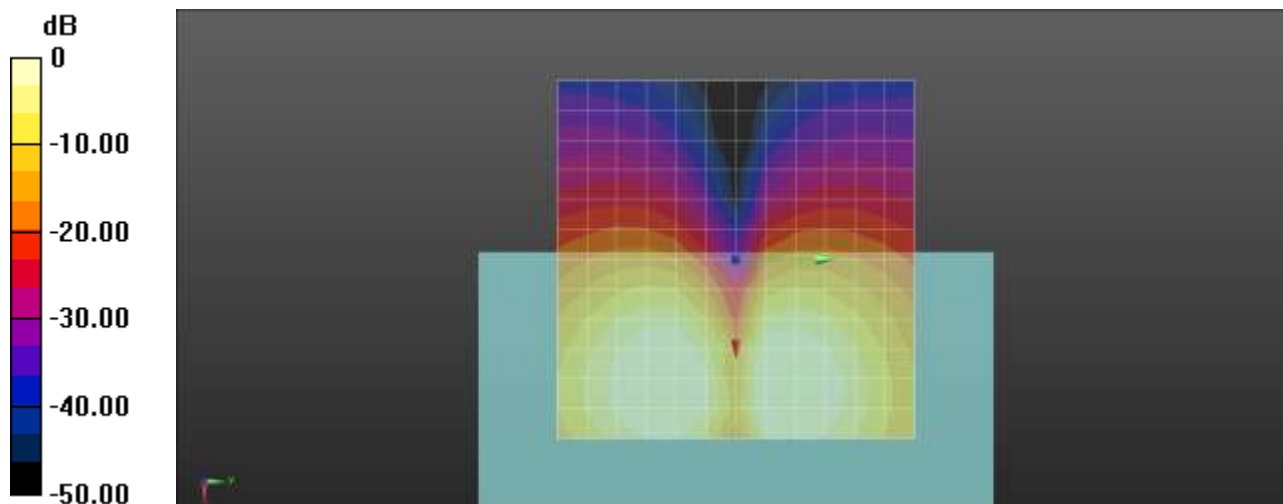

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.100

LTE 7 QPSK 20MHz 50RB 49offset 21100ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.44 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.08 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.52 dB

ABM1 comp = 9.44 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

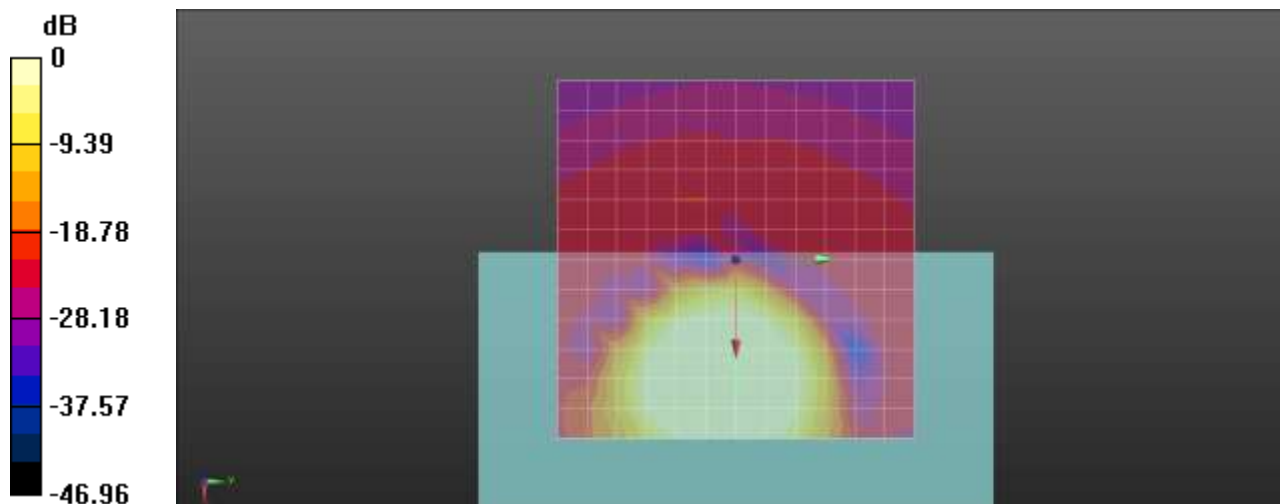

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.101

LTE 7 QPSK 20MHz 50RB 49offset 21100ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 16.4, 0.1, 3.7 mm

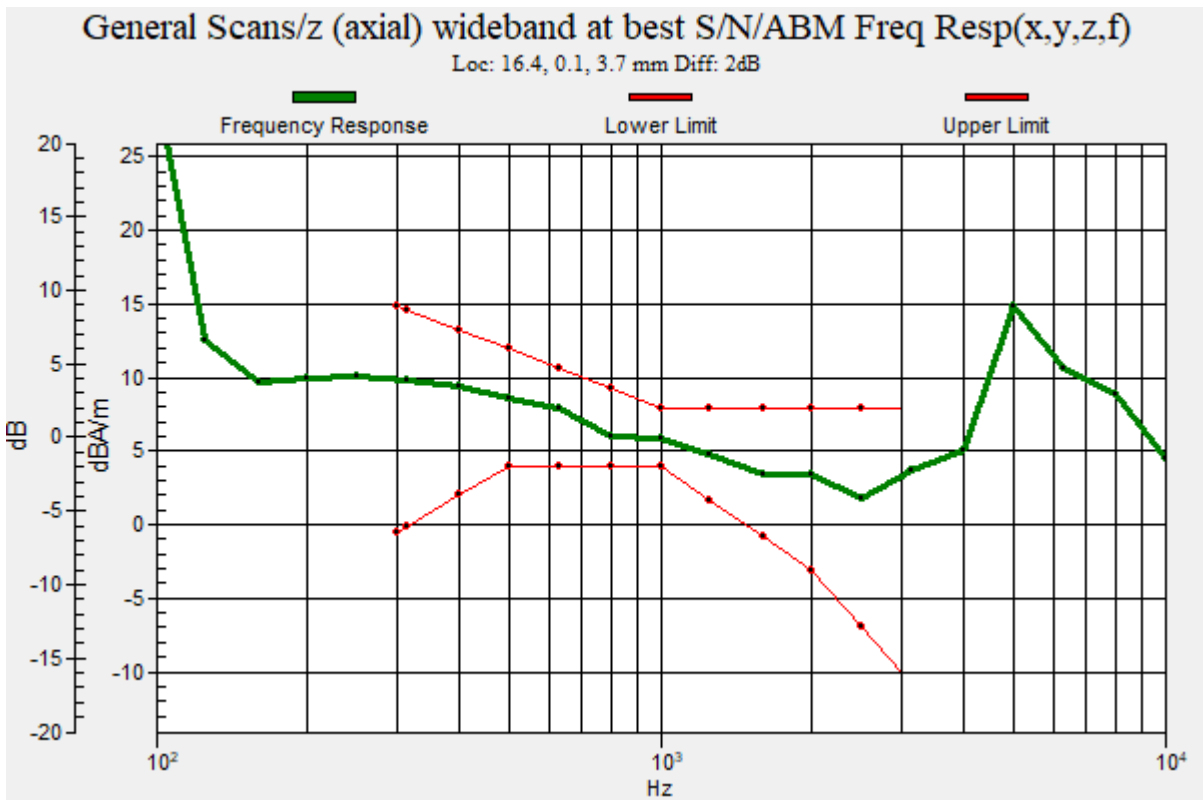

Plot No.102

LTE 7 QPSK 20MHz 50RB 49offset 21100ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 7 (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.60 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -42.98 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.59 dB

ABM1 comp = 2.60 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 8.3, 3.7 mm

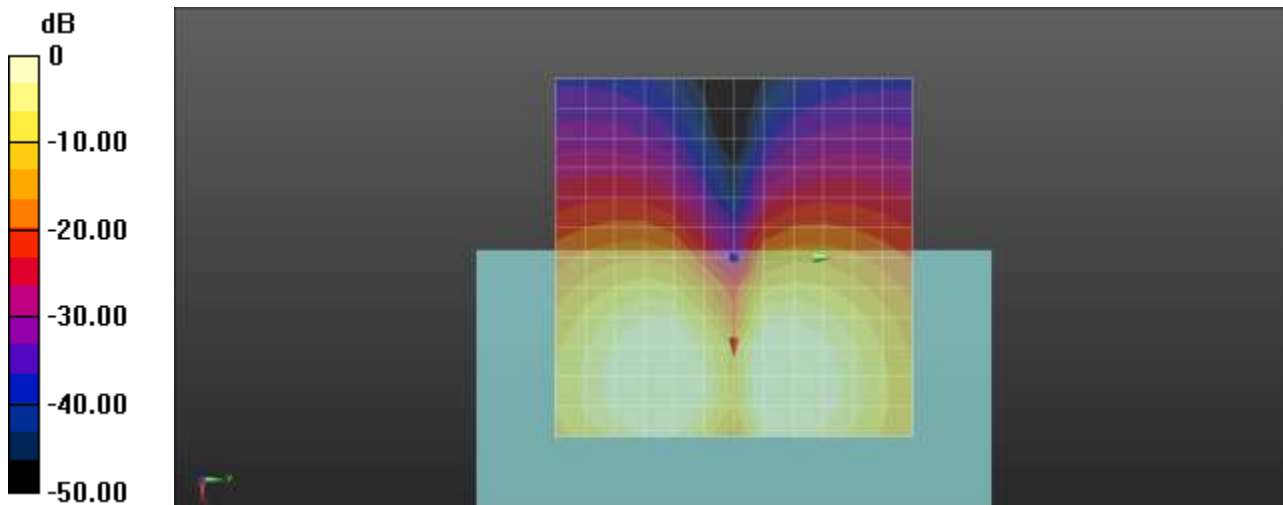

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.103

LTE 12 QPSK 10MHz 25RB 24offset 23095ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.33 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -41.67 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.00 dB

ABM1 comp = 9.33 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

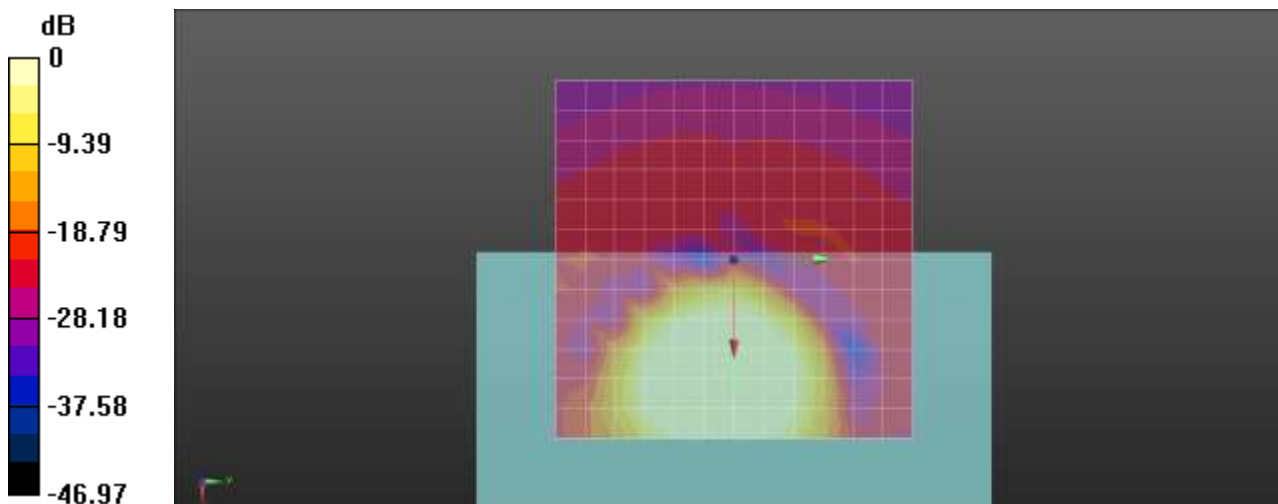

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.104

LTE 12 QPSK 10MHz 25RB 24offset 23095ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 15.5, 0.5, 3.7 mm

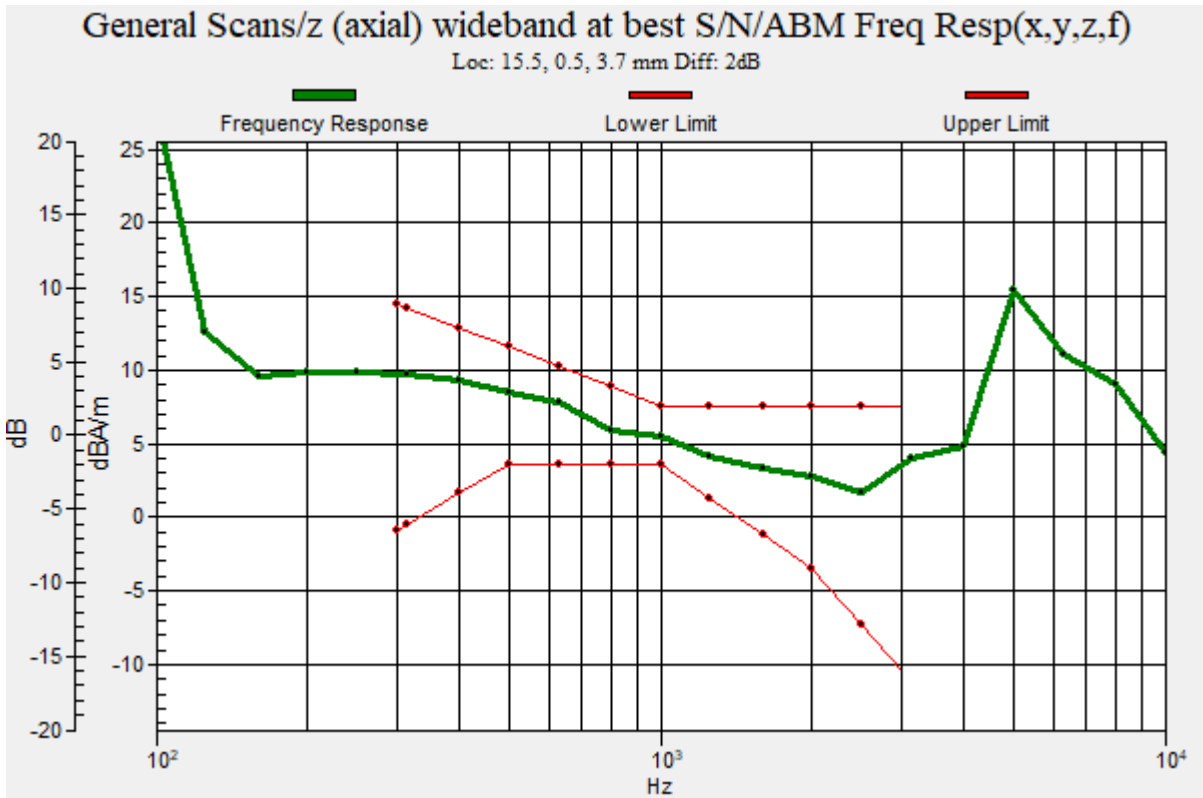

Plot No.105

LTE 12 QPSK 10MHz 25RB 24offset 23095ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 12 (0); Frequency: 707.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.82 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.75 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.58 dB

ABM1 comp = 0.82 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

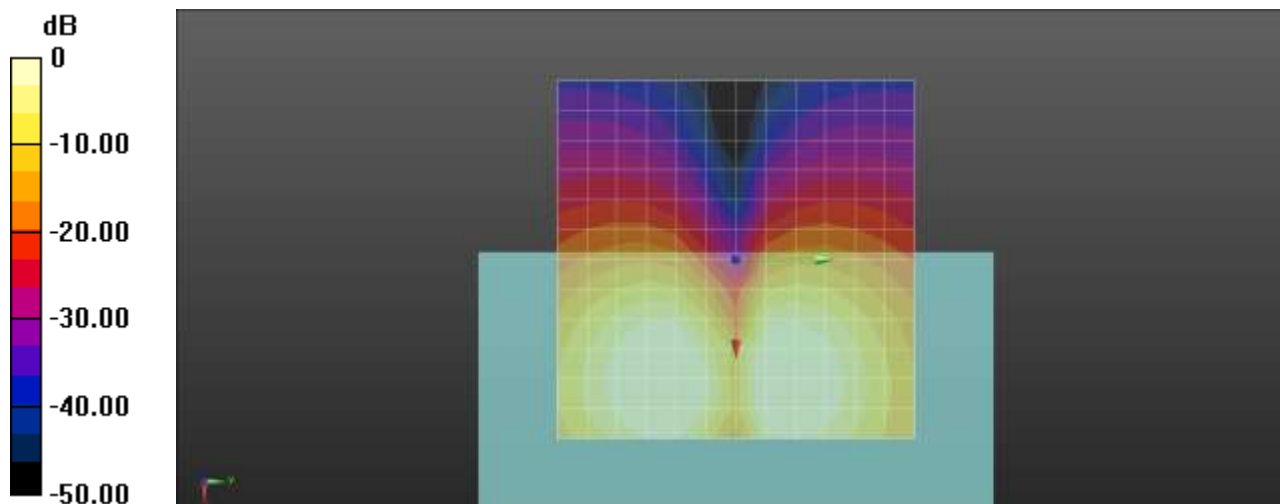

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.106

LTE 13 QPSK 10MHz 25RB 24offset 23230ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.47 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.29 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.76 dB

ABM1 comp = 9.47 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

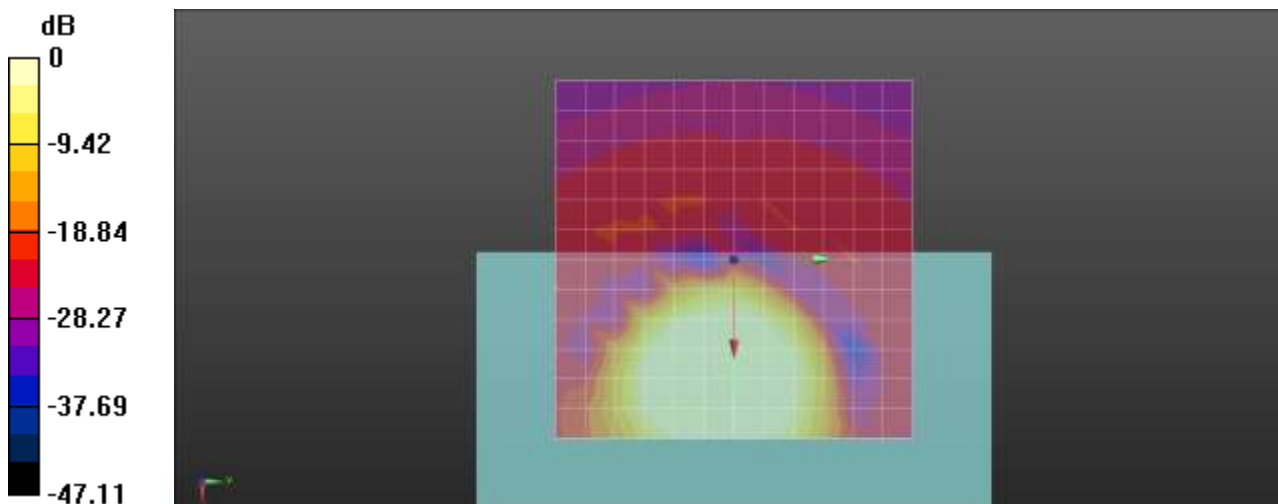

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.107

LTE 13 QPSK 10MHz 25RB 24offset 23230ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best

S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 15.8, -0.7, 3.7 mm

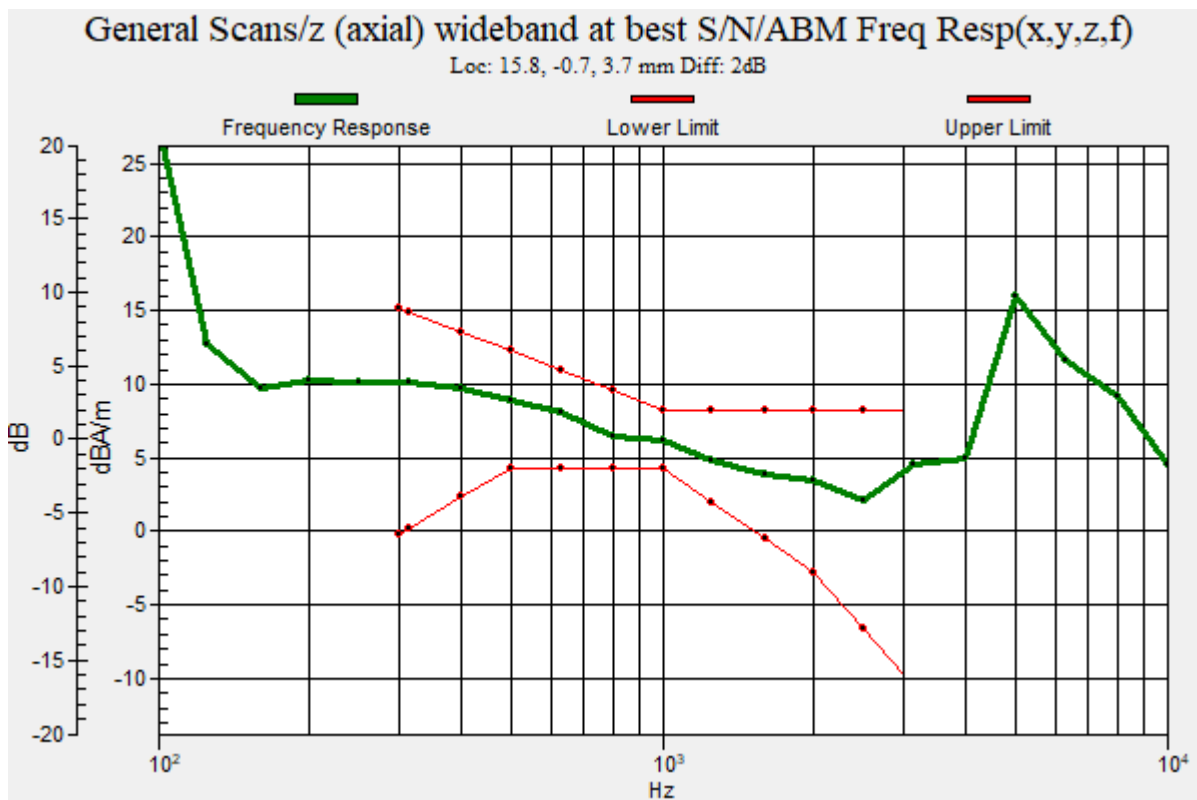

Plot No.108

LTE 13 QPSK 10MHz 25RB 24offset 23230ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 13 (0); Frequency: 782 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.81 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.63 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.44 dB

ABM1 comp = 0.81 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

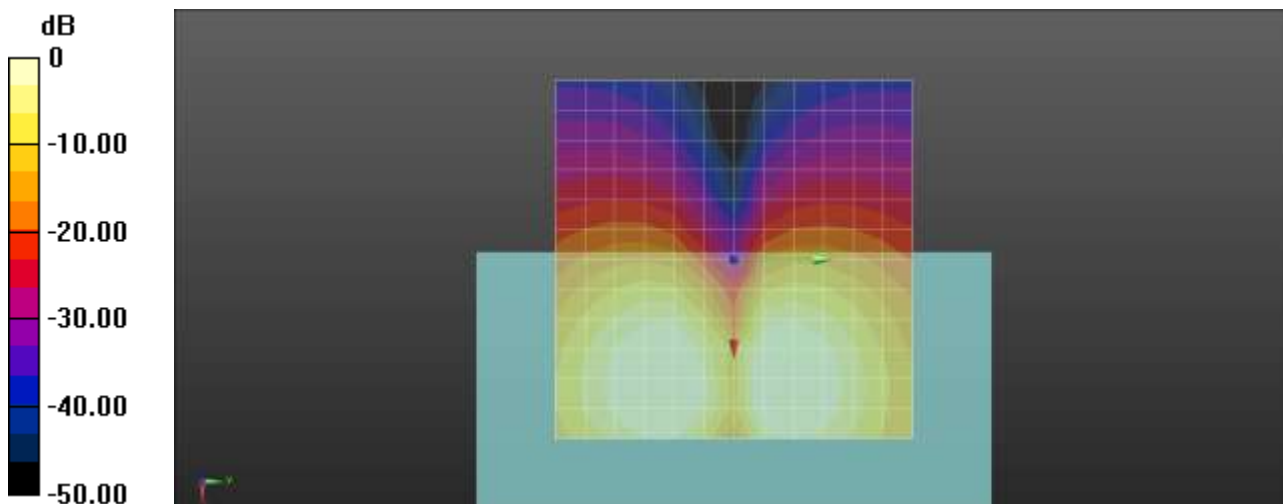

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.109

LTE 14 QPSK 10MHz 25RB 24offset 23330ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -43.59 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 52.98 dB

ABM1 comp = 9.39 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

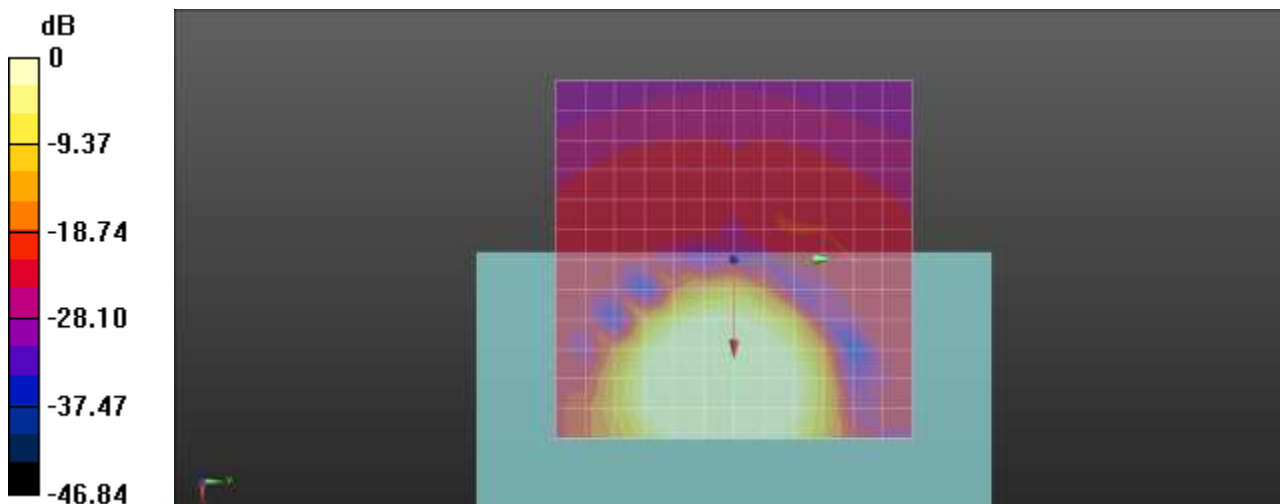

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.110

LTE 14 QPSK 10MHz 25RB 24offset 23330ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.94 dB

BWC Factor = 9.48 dB

Location: 16.1, -1.2, 3.7 mm

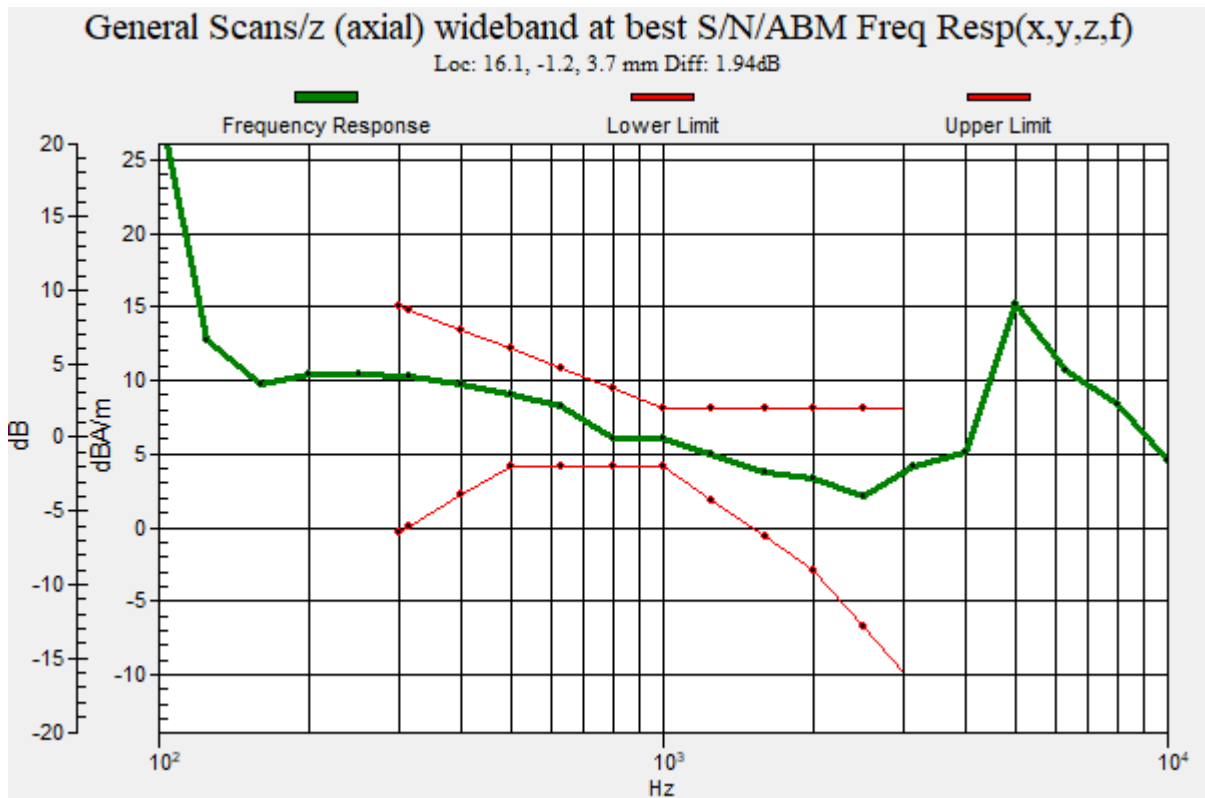

Plot No.111

LTE 14 QPSK 10MHz 25RB 24offset 23330ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 14 (0); Frequency: 793 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.35 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -43.06 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.41 dB

ABM1 comp = 2.35 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

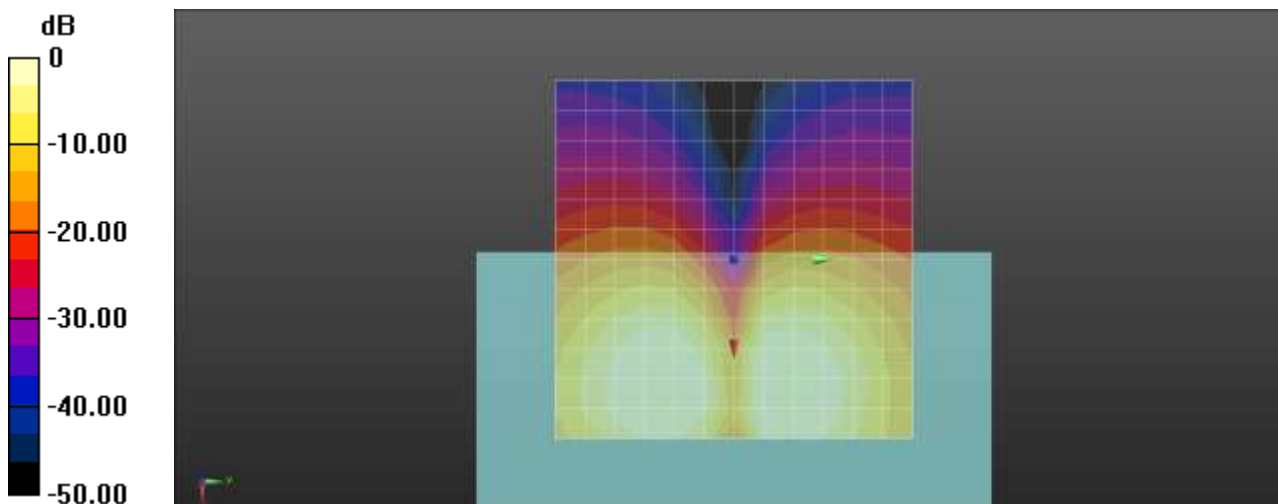

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.112

LTE 25 QPSK 20MHz 50RB 49offset 26365ch Bitrate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.23 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.22 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.45 dB

ABM1 comp = 9.23 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

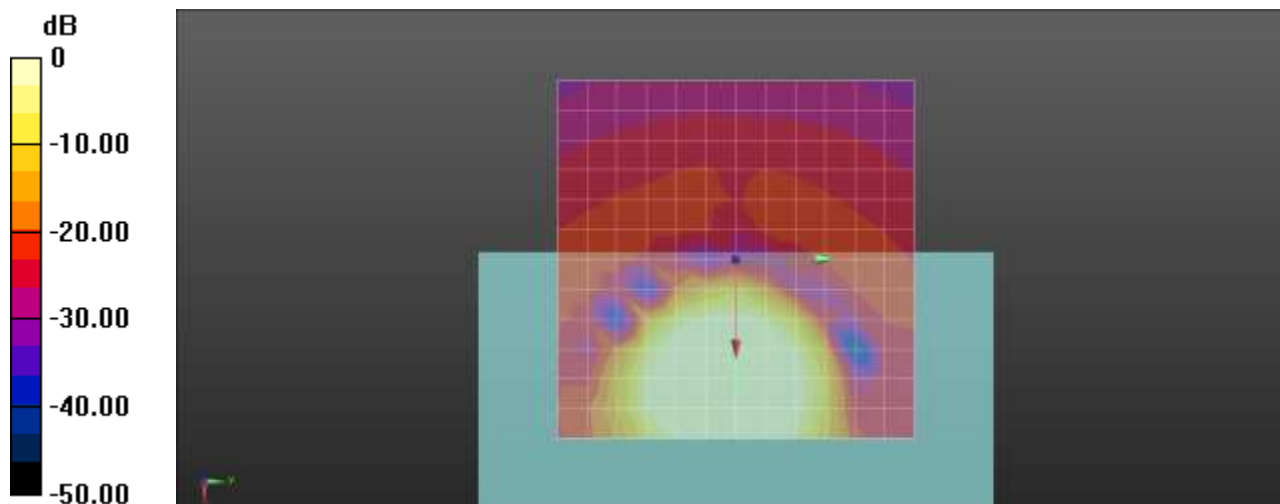

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.113

LTE 25 QPSK 20MHz 50RB 49offset 26365ch Bitrate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 16, 0.1, 3.7 mm

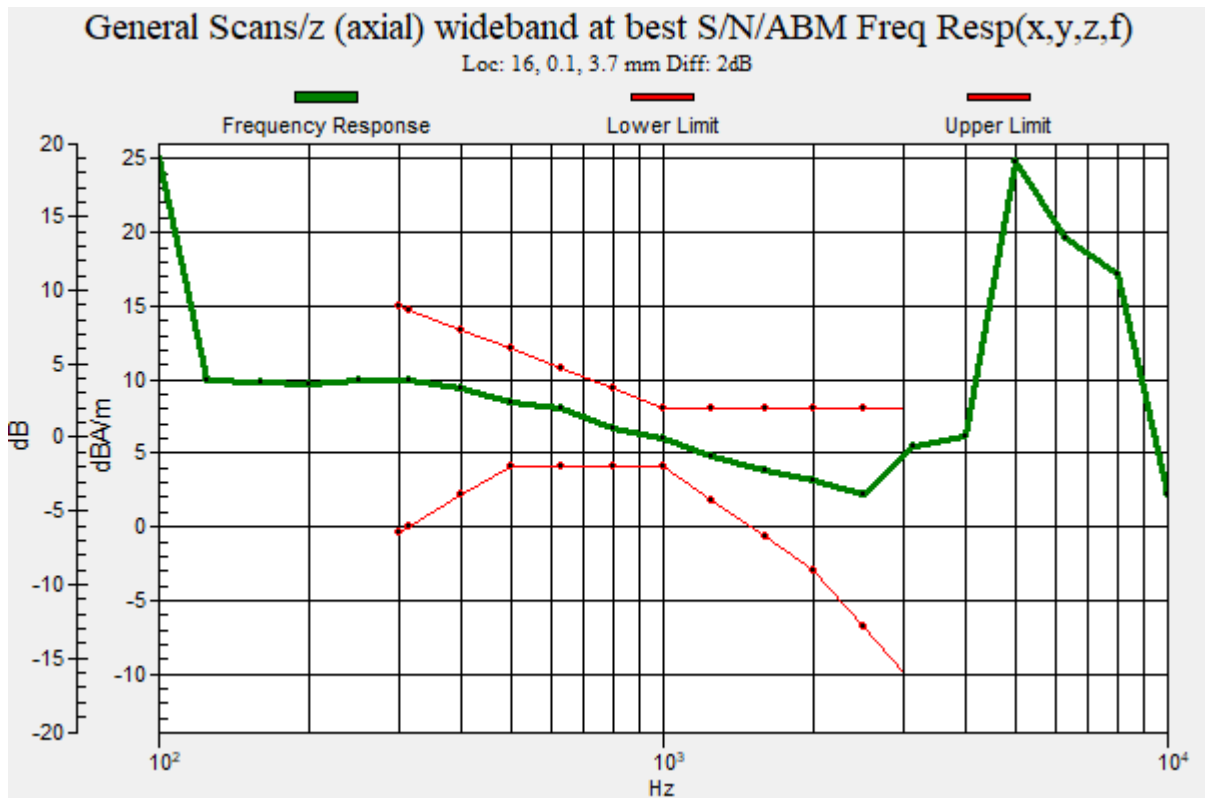

Plot No.114

LTE 25 QPSK 20MHz 50RB 49offset 26365ch Bitrate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.01 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -42.20 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 44.21 dB

ABM1 comp = 2.01 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

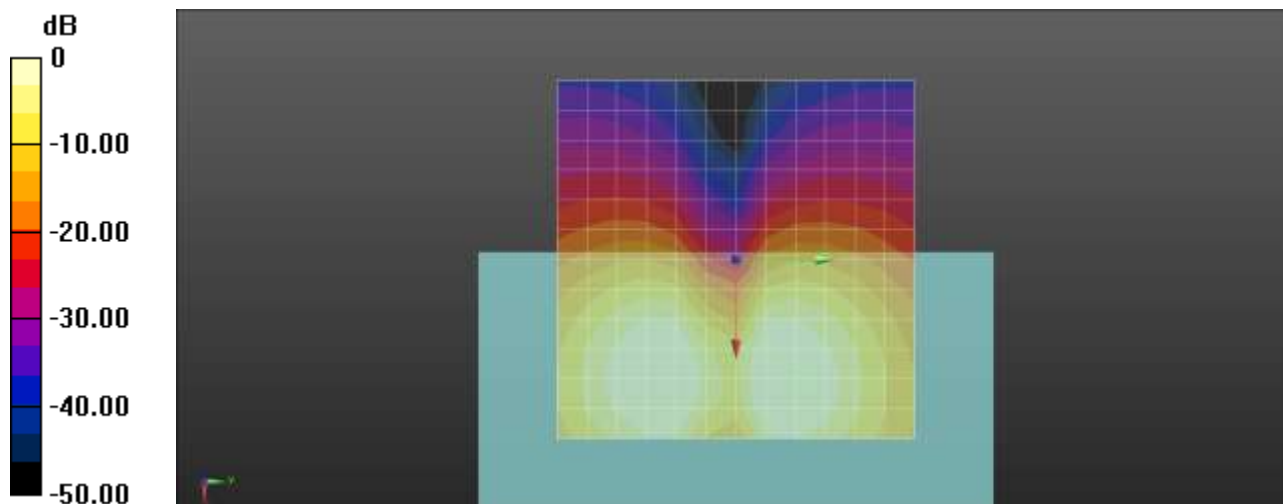

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.115

LTE 26 QPSK 10MHz 25RB 24offset 26865ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.40 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.53 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.93 dB

ABM1 comp = 9.40 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

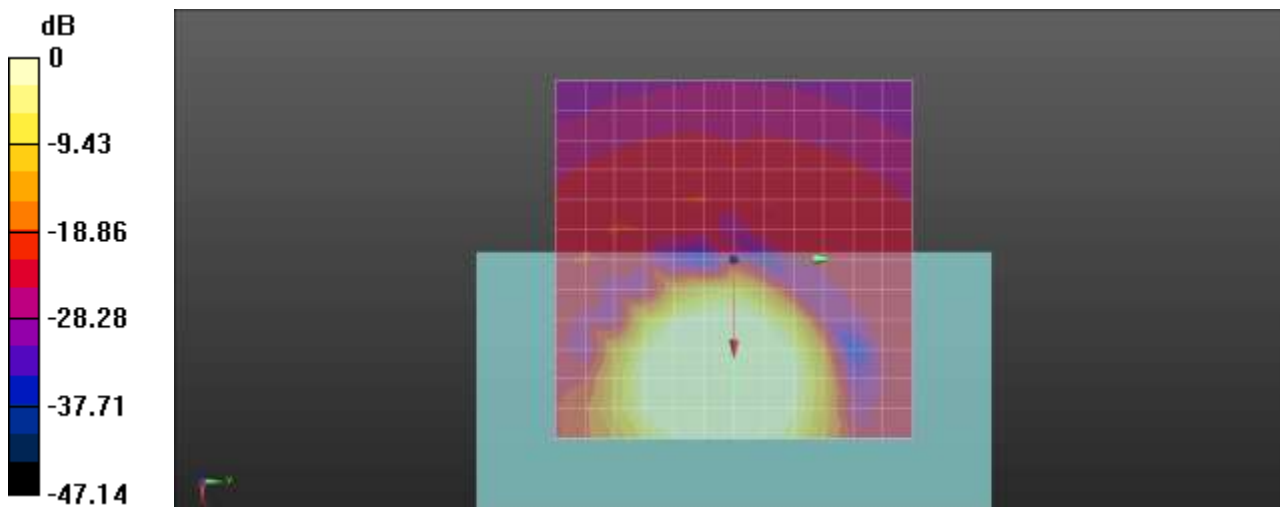

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.116

LTE 26 QPSK 10MHz 25RB 24offset 26865ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 15.8, 0.1, 3.7 mm

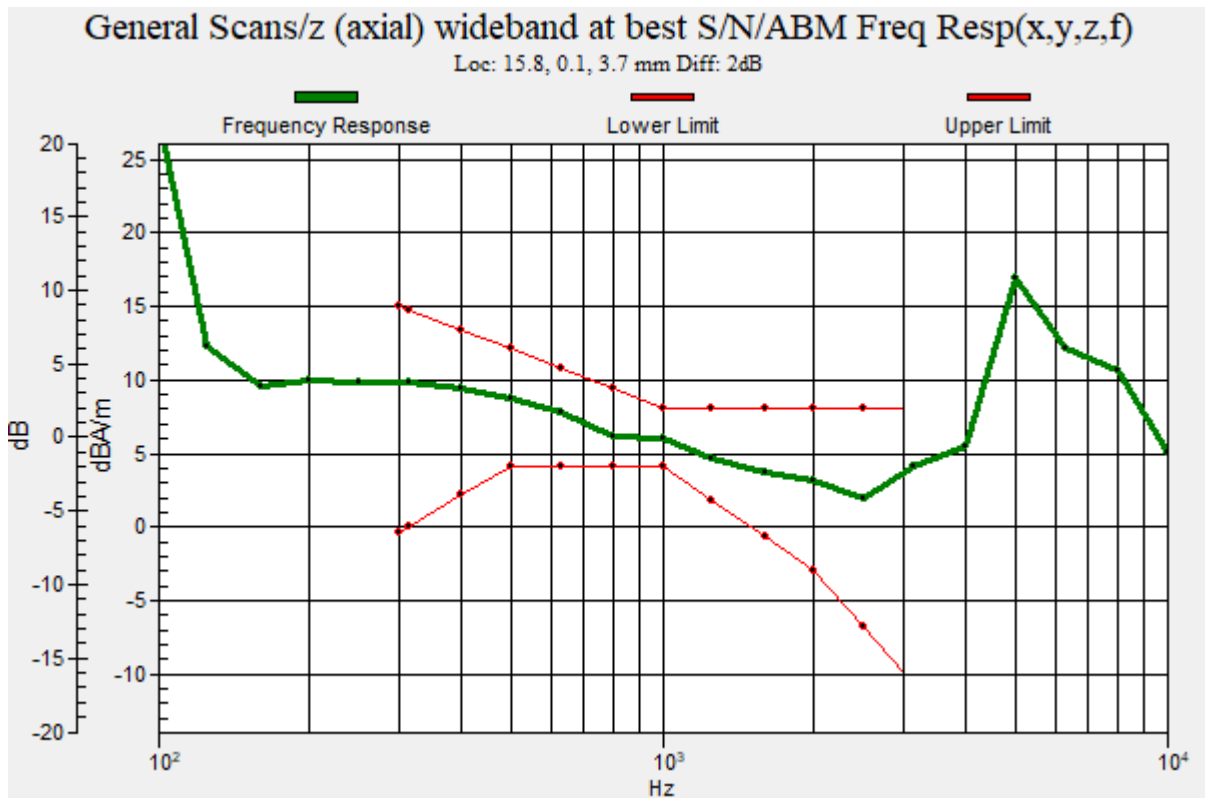

Plot No.117

LTE 26 QPSK 10MHz 25RB 24offset 26865ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 26 (0); Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.68 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.41 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.08 dB

ABM1 comp = 0.68 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

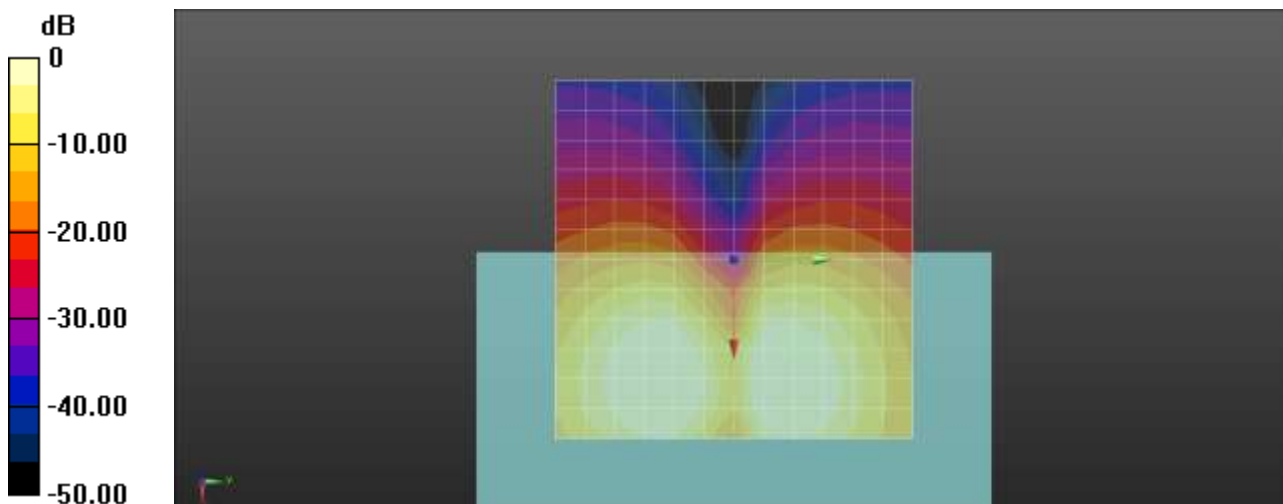

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.118

LTE 30 QPSK 10MHz 25RB 24offset 27710ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.50 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.86 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 52.36 dB

ABM1 comp = 9.50 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

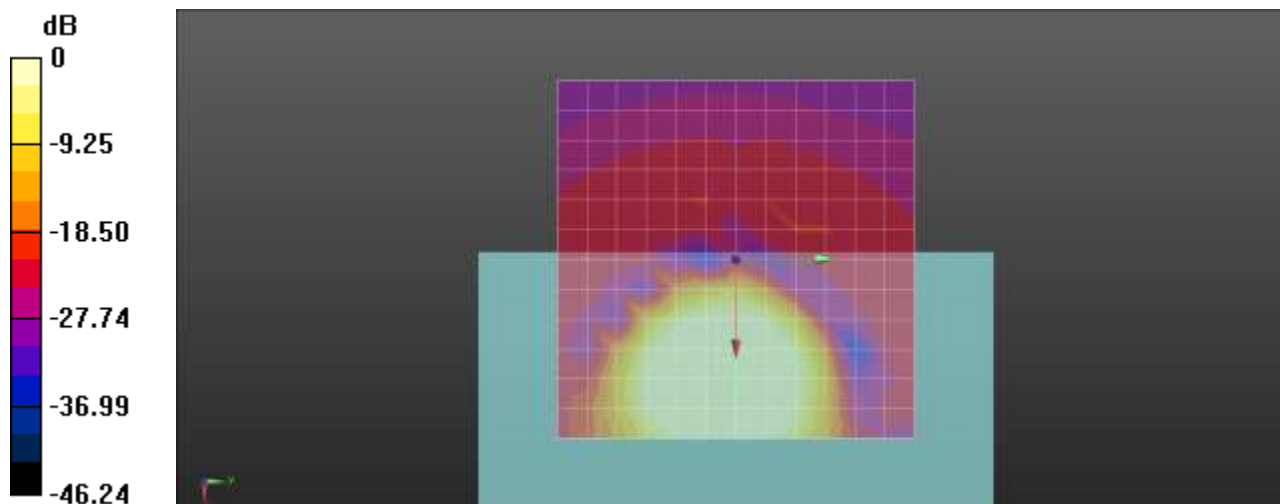

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.119

LTE 30 QPSK 10MHz 25RB 24offset 27710ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best

S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 15.8, -0.2, 3.7 mm

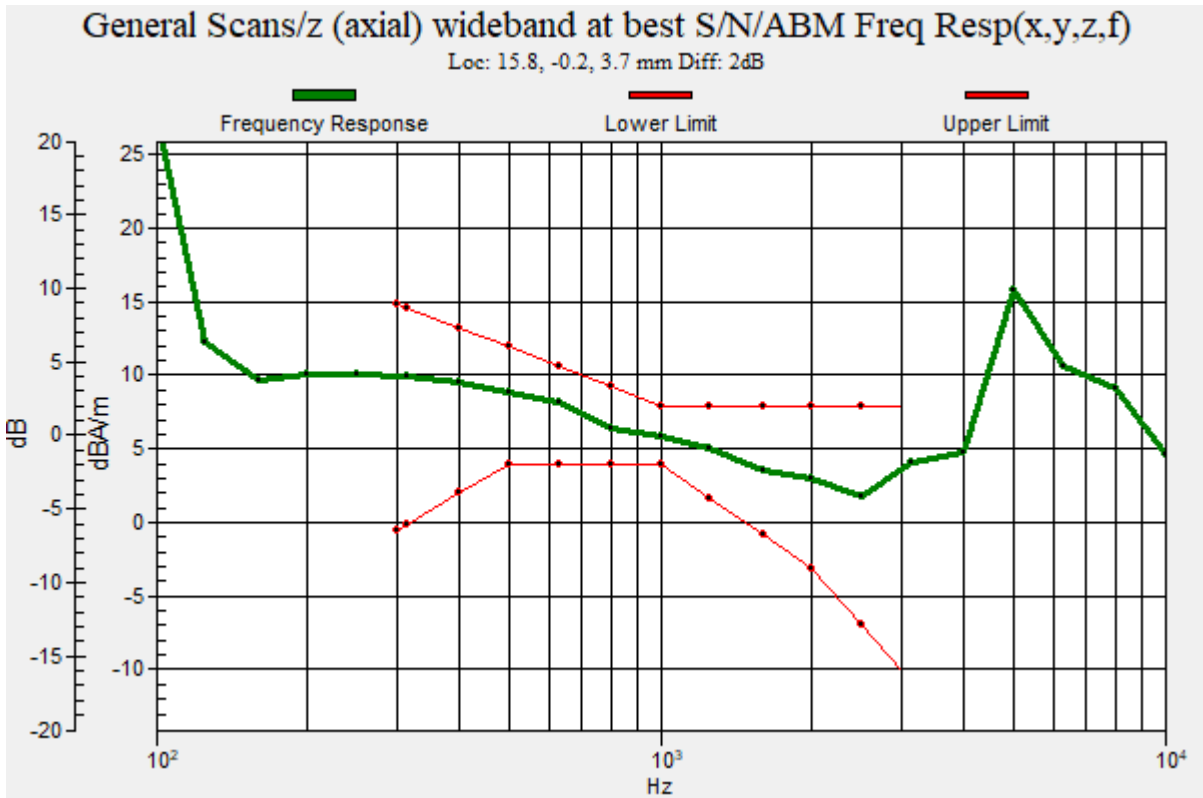

Plot No.120

LTE 30 QPSK 10MHz 25RB 24offset 27710ch Bit rate 75-1 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 30 (0); Frequency: 2310 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.61 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -45.04 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.65 dB

ABM1 comp = 0.61 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

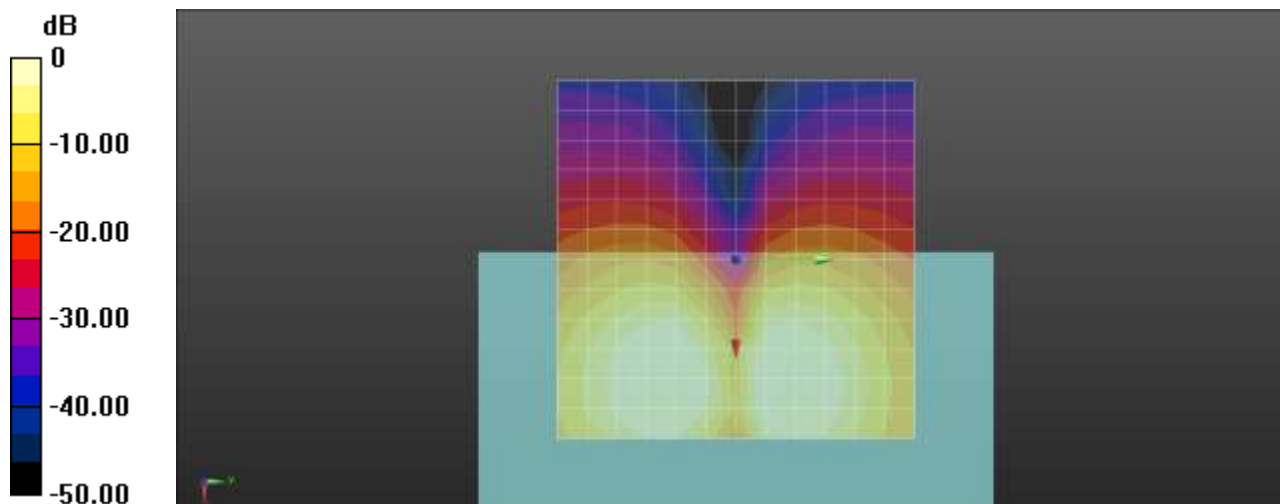

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.121

LTE 66 QPSK 20MHz 50RB 49offset 132322ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.41 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.29 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 51.70 dB

ABM1 comp = 9.41 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

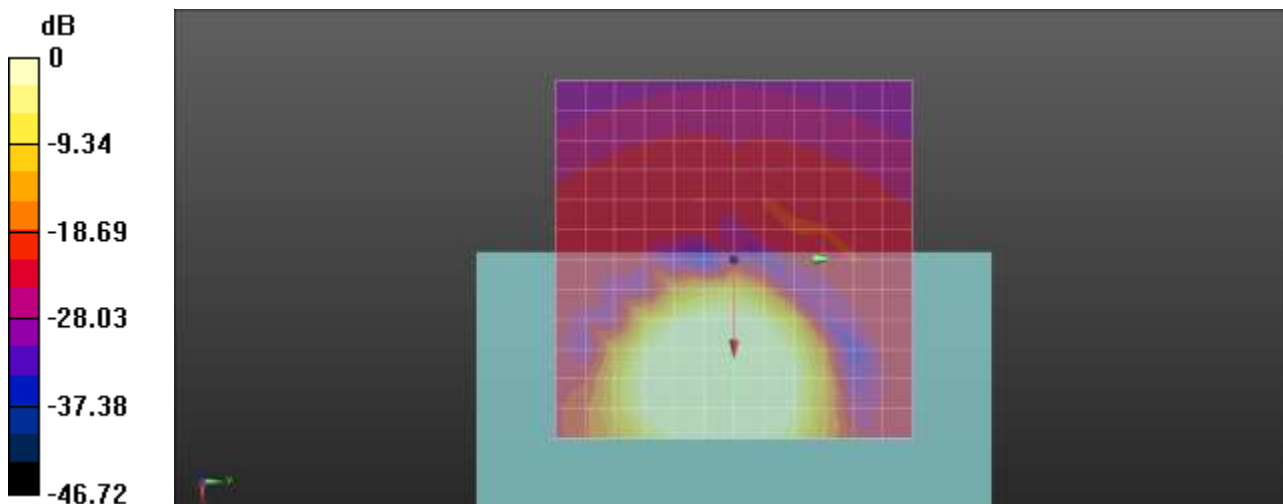

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.122

LTE 66 QPSK 20MHz 50RB 49offset 132322ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.92 dB

BWC Factor = 9.48 dB

Location: 15.1, -1.6, 3.7 mm

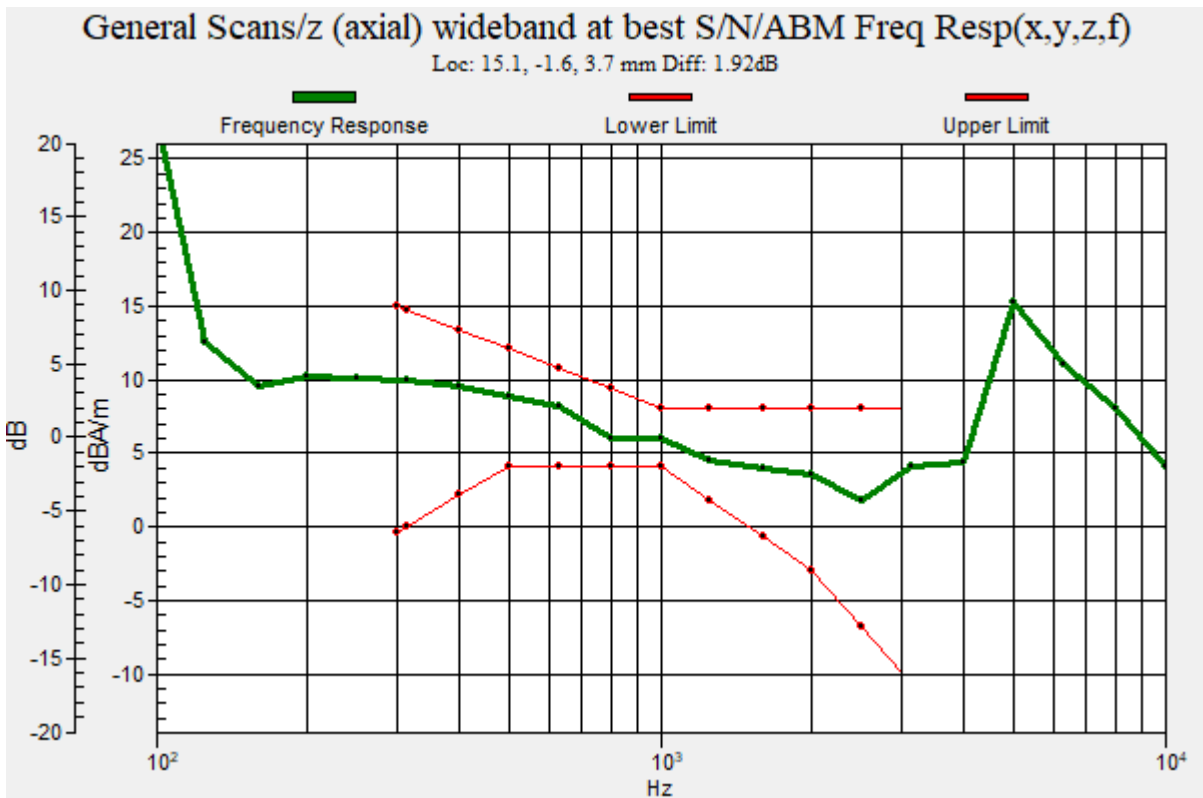

Plot No.123

LTE 66 QPSK 20MHz 50RB 49offset 132322ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.50 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.76 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 45.26 dB

ABM1 comp = 0.50 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

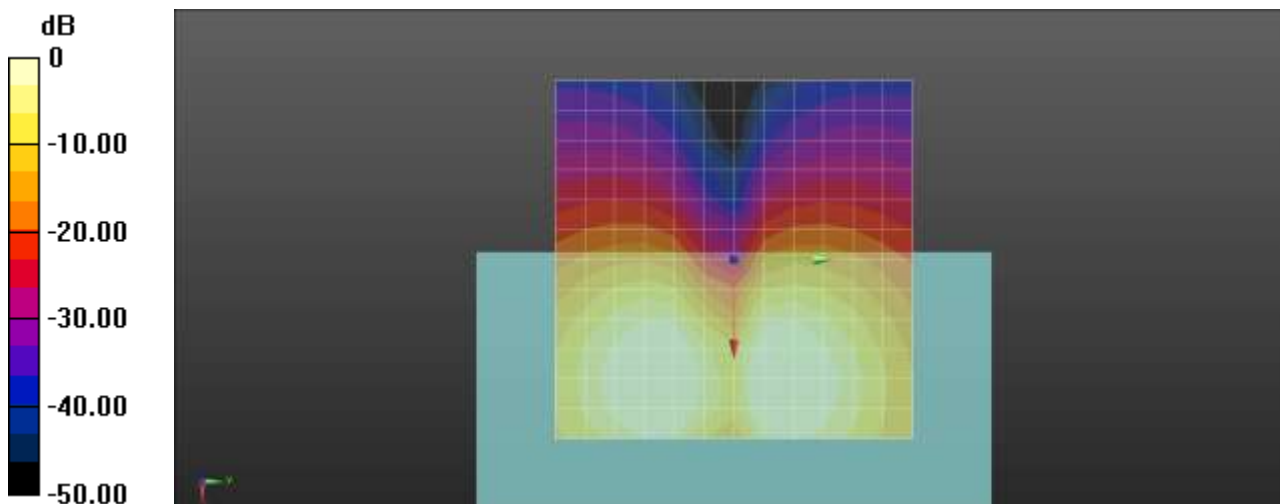

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.124

LTE 71 QPSK 20MHz 50RB 49offset 133322ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.17 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = 9.38 dBA/m
BWC Factor = 0.17 dB
Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -42.28 dBA/m
Location: 16.7, 0, 3.7 mm

Cursor:

ABM1/ABM2 = 51.66 dB
ABM1 comp = 9.38 dBA/m
BWC Factor = 0.17 dB
Location: 16.7, 0, 3.7 mm

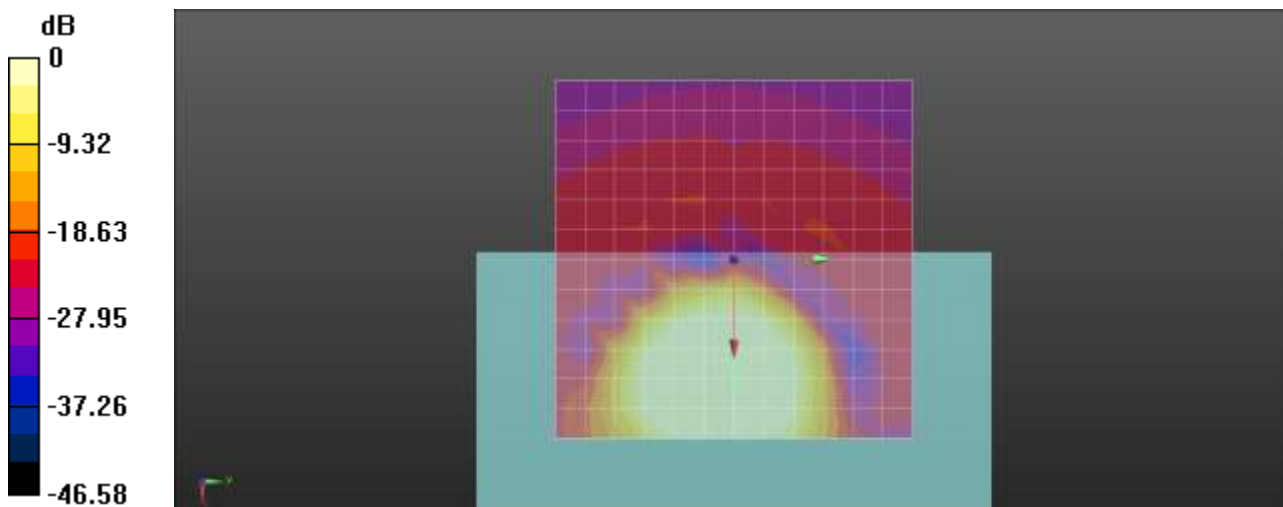

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.125

LTE 71 QPSK 20MHz 50RB 49offset 133322ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.98 dB

BWC Factor = 9.48 dB

Location: 15.7, -1.7, 3.7 mm

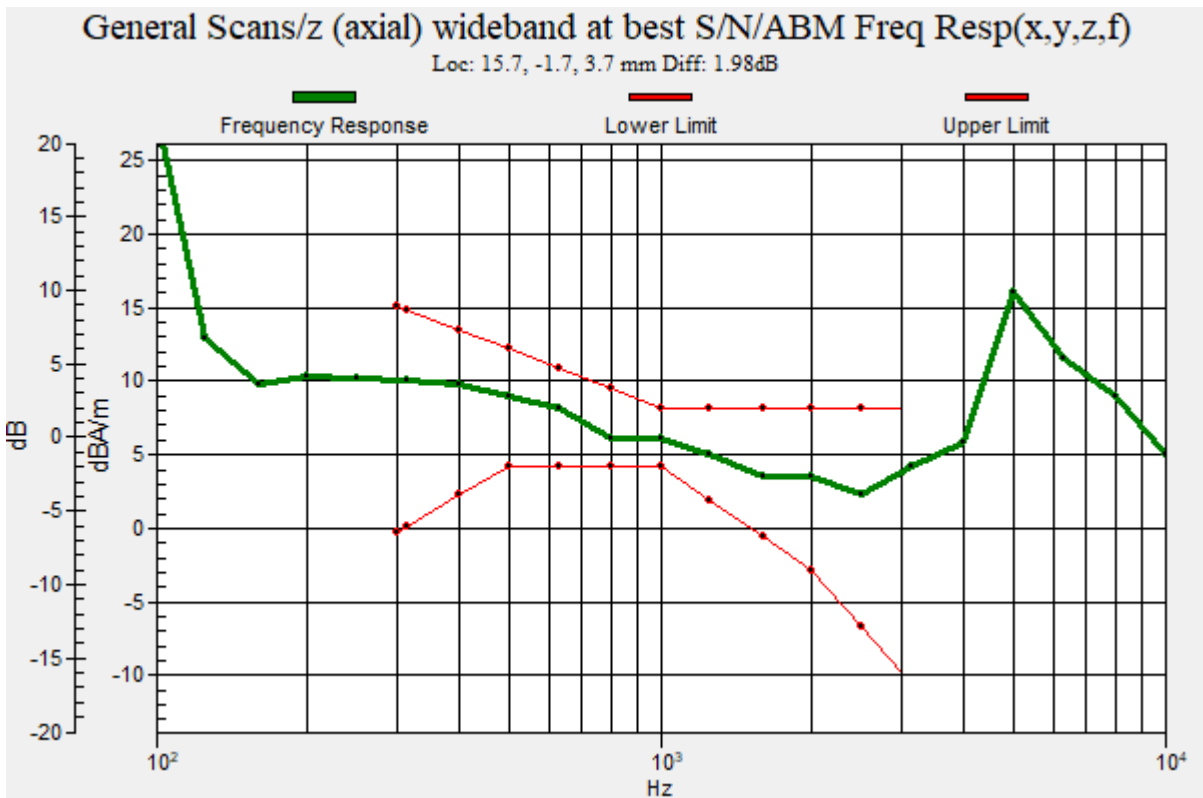

Plot No.126

LTE 71 QPSK 20MHz 50RB 49offset 133322ch Bit rate 75 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE 71 (0); Frequency: 683 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.44 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.39 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 44.84 dB

ABM1 comp = 0.44 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

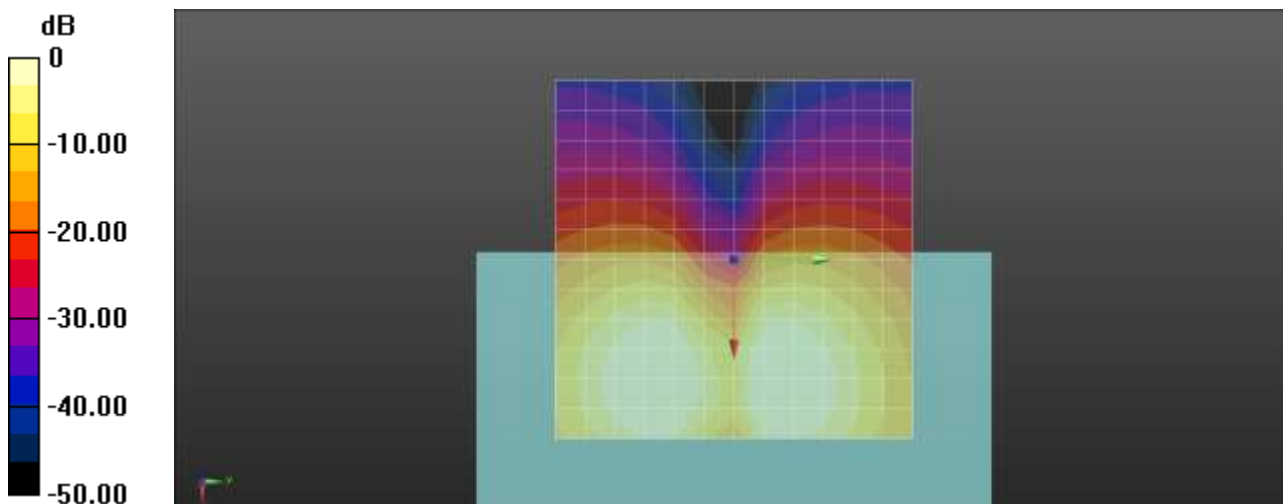

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.127

LTE 38 QPSK 20MHz 100RB 0offset 38000ch 2 6 Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.14 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -32.55 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 41.68 dB

ABM1 comp = 9.14 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

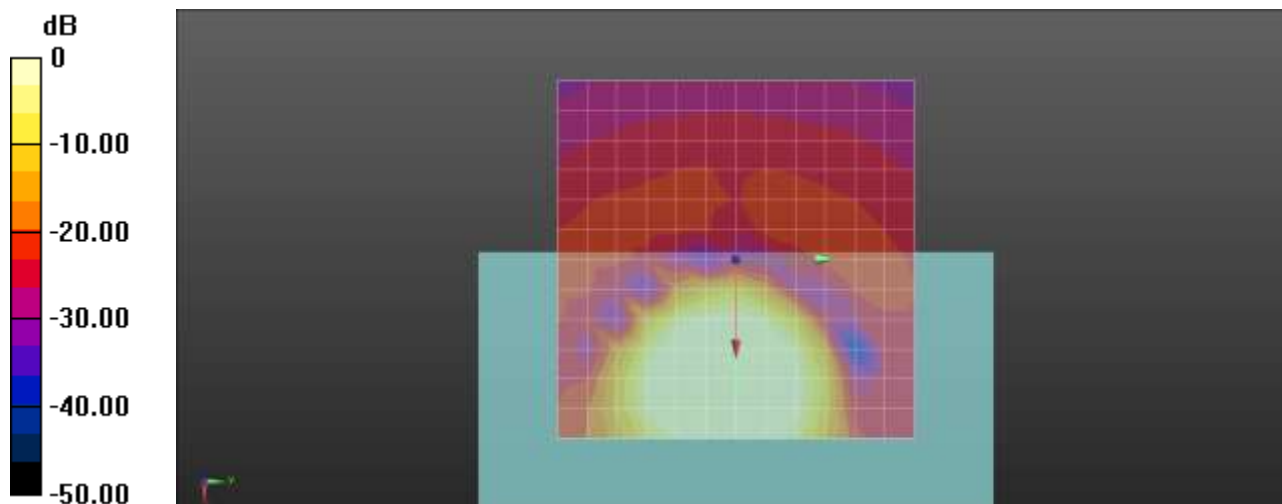

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.128

LTE 38 QPSK 20MHz 100RB 0offset 38000ch 2 6 Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 16.5, -0.1, 3.7 mm

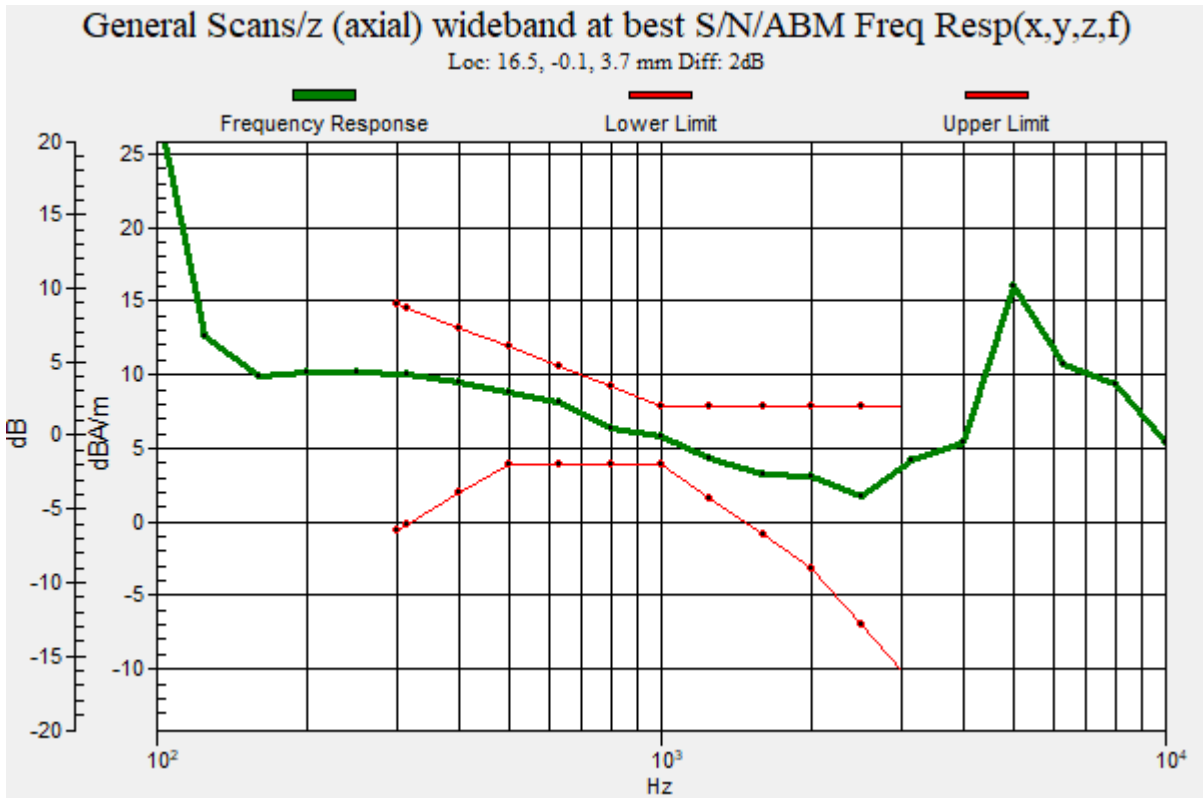

Plot No.129

LTE 38 QPSK 20MHz 100RB 0offset 38000ch 2 6 Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 38 (0); Frequency: 2595 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.06 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -38.70 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 38.76 dB

ABM1 comp = 0.06 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

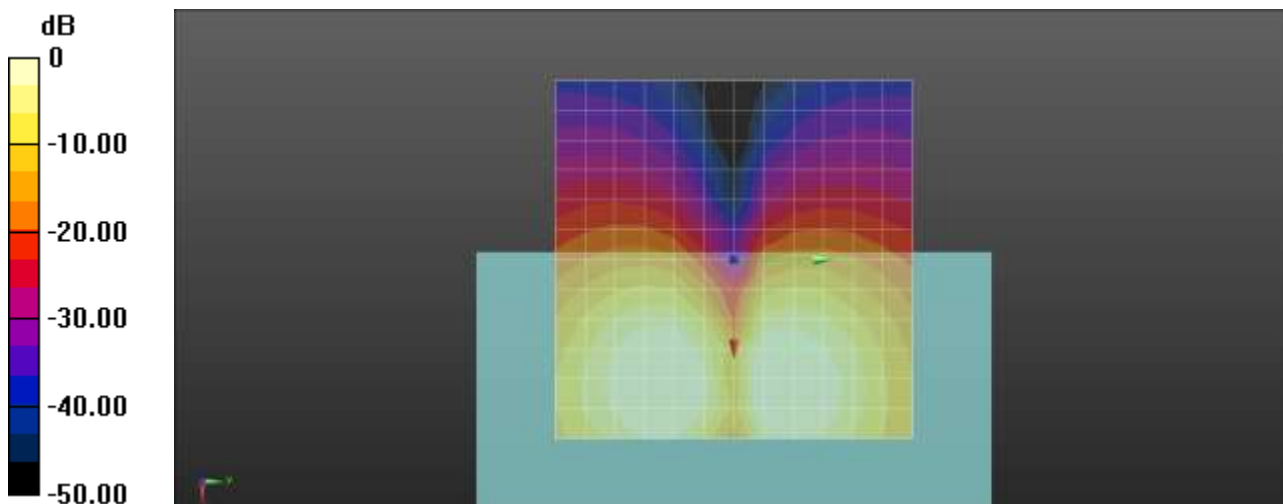

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.130

LTE 40 QPSK 10MHz 50RB 0offset 38750ch 2 6 Bit rate 6 Lower Band z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.39 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -36.92 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 46.31 dB

ABM1 comp = 9.39 dBA/m

BWC Factor = 0.17 dB

Location: 16.7, 0, 3.7 mm

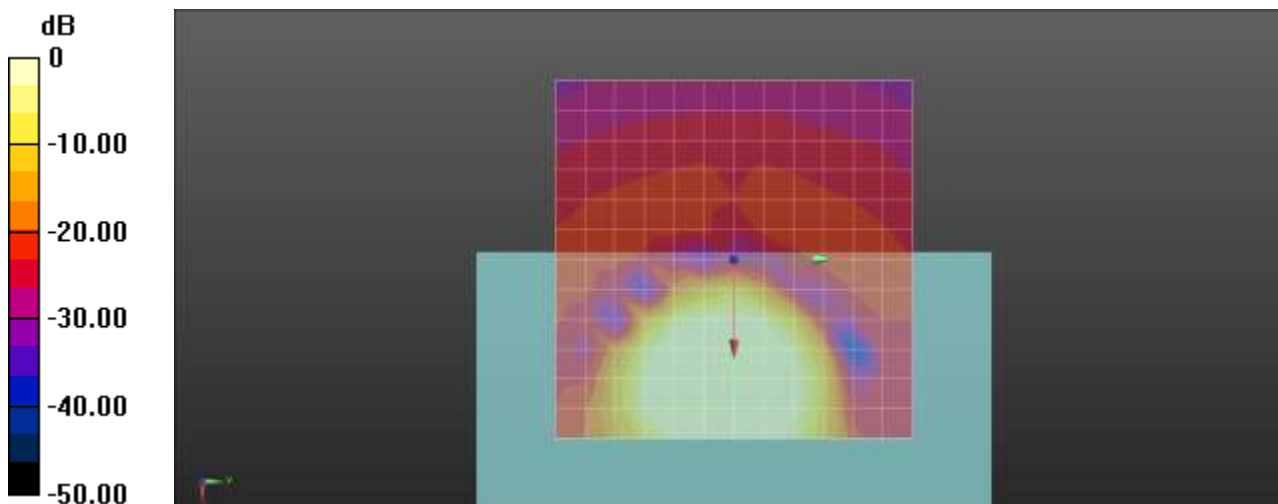

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.131

LTE 40 QPSK 10MHz 50RB 0offset 38750ch 2 6 Bit rate 6 Lower Band Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 16.5, 0.1, 3.7 mm

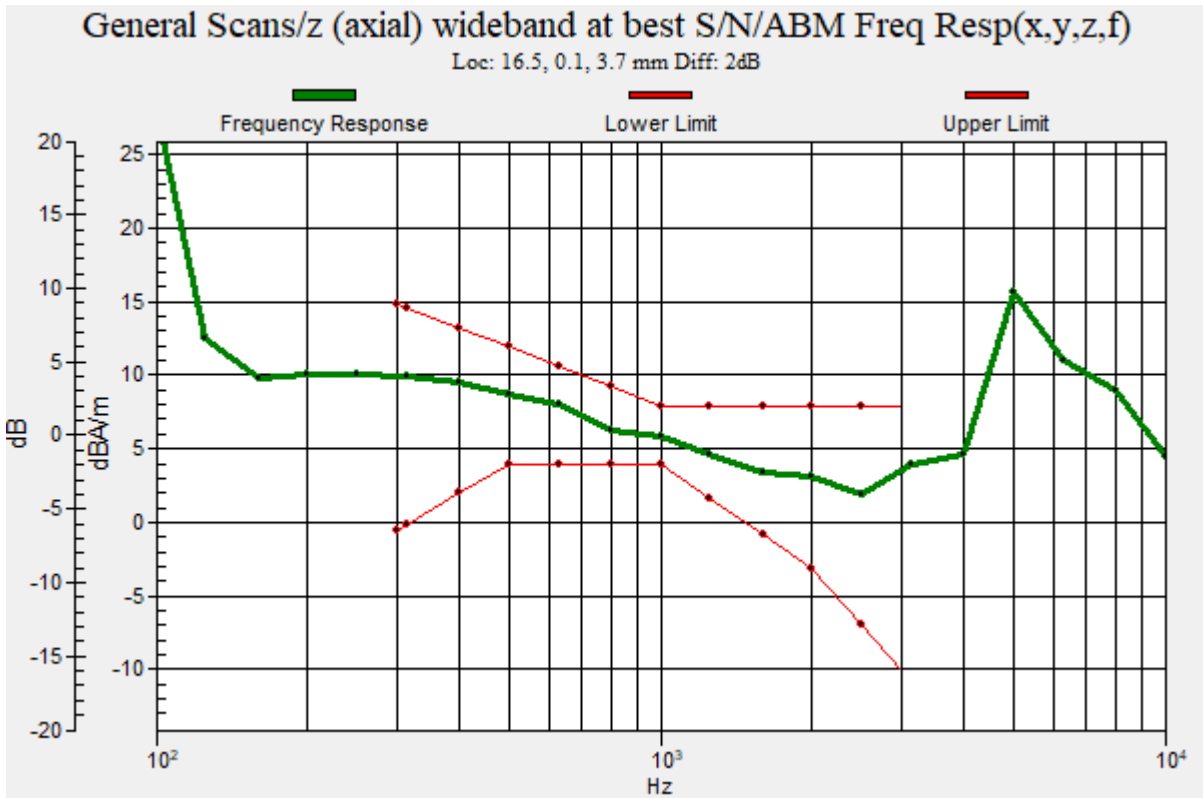

Plot No.132

LTE 40 QPSK 10MHz 50RB 0offset 38750ch 2 6 Bit rate 6 Lower Band y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2310 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.17 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.14 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -41.82 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 41.97 dB

ABM1 comp = 0.14 dBA/m

BWC Factor = 0.17 dB

Location: 12.5, 8.3, 3.7 mm

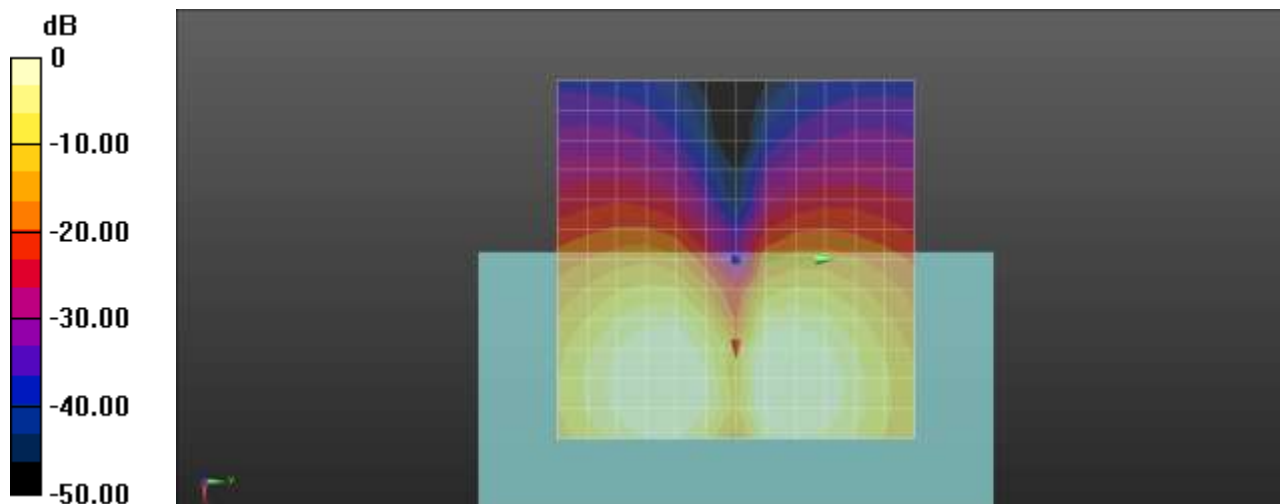

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.133

LTE 40 QPSK 10MHz 50RB 0offset 39200ch 2 6 Bit rate 6 Upper Band z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.42 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -36.11 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 45.53 dB

ABM1 comp = 9.42 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

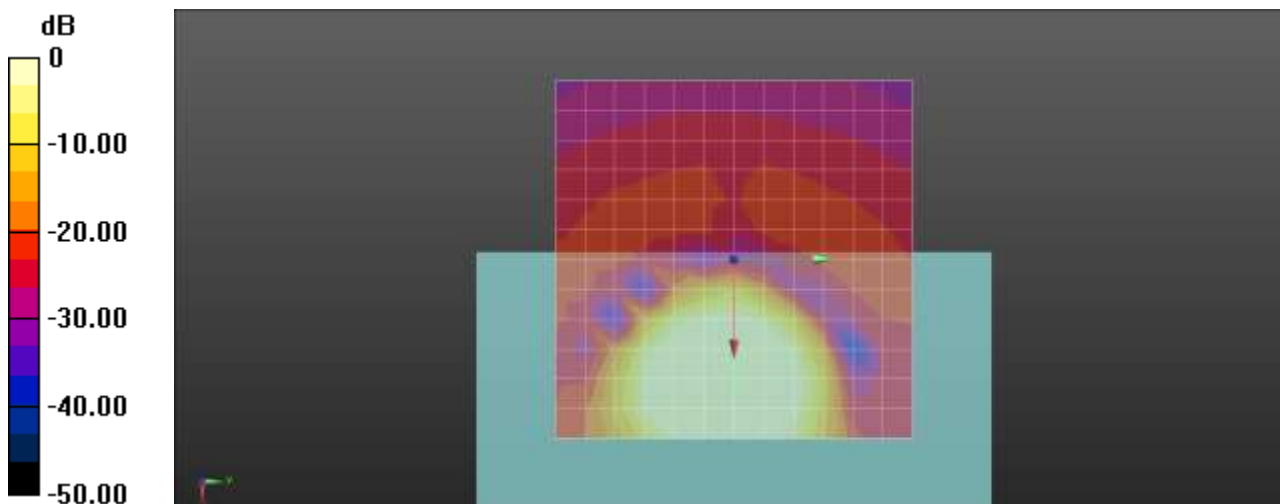

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.134

LTE 40 QPSK 10MHz 50RB 0offset 39200ch 2 6 Bit rate 6 Upper Band Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 16.5, -0.1, 3.7 mm

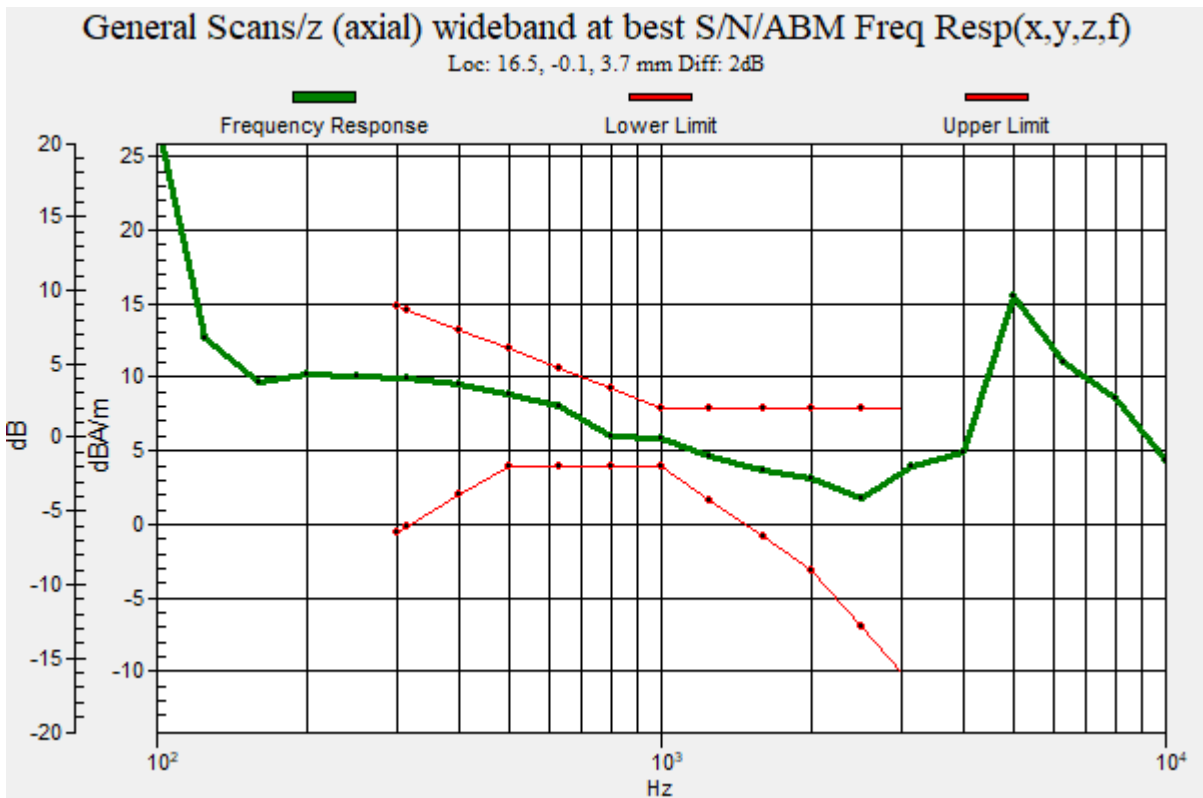

Plot No.135

LTE 40 QPSK 10MHz 50RB 0offset 39200ch 2 6 Bit rate 6 Upper Band y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 40 (0); Frequency: 2355 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = 0.36 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -41.30 dBA/m
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM1/ABM2 = 41.65 dB
ABM1 comp = 0.36 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

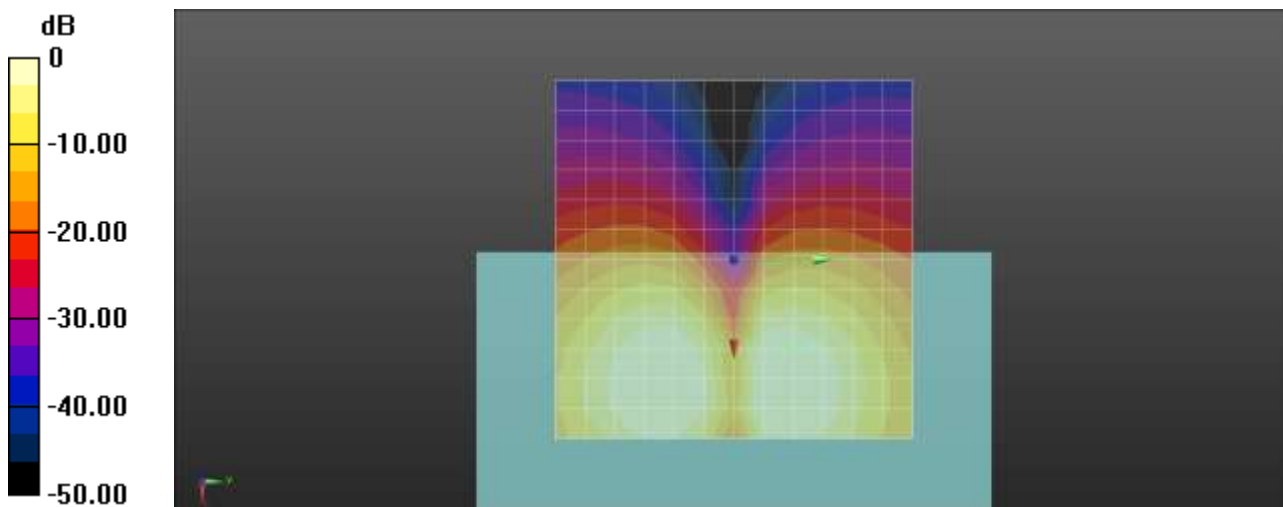

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.136

LTE 41 QPSK 20MHz 100RB 0offset 40620ch 2 6 Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 8.92 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -30.35 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 39.27 dB

ABM1 comp = 8.92 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

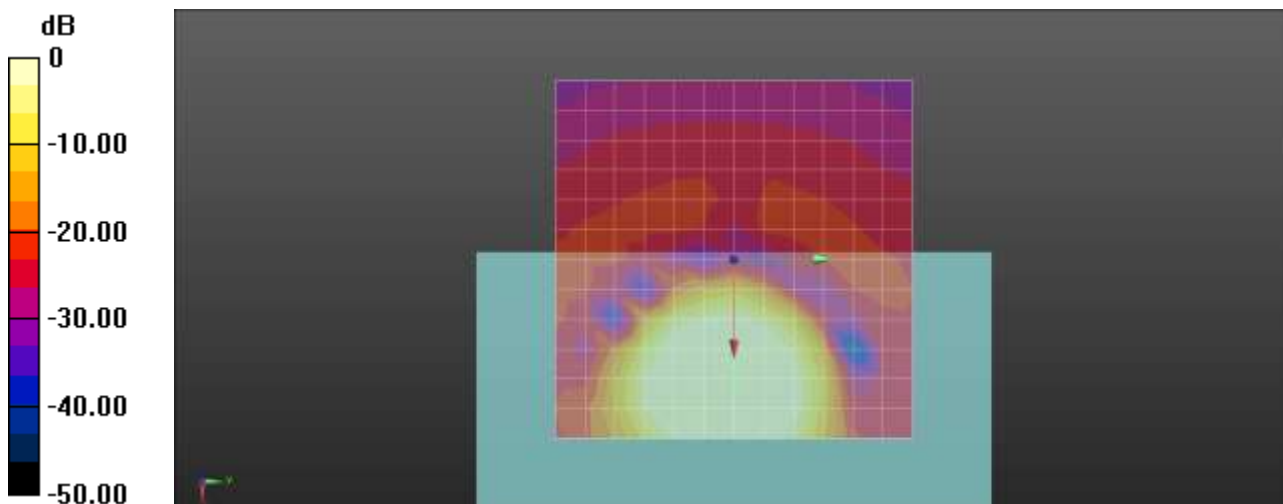

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.137

LTE 41 QPSK 20MHz 100RB 0offset 40620ch 2 6 Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 16.4, 0.2, 3.7 mm

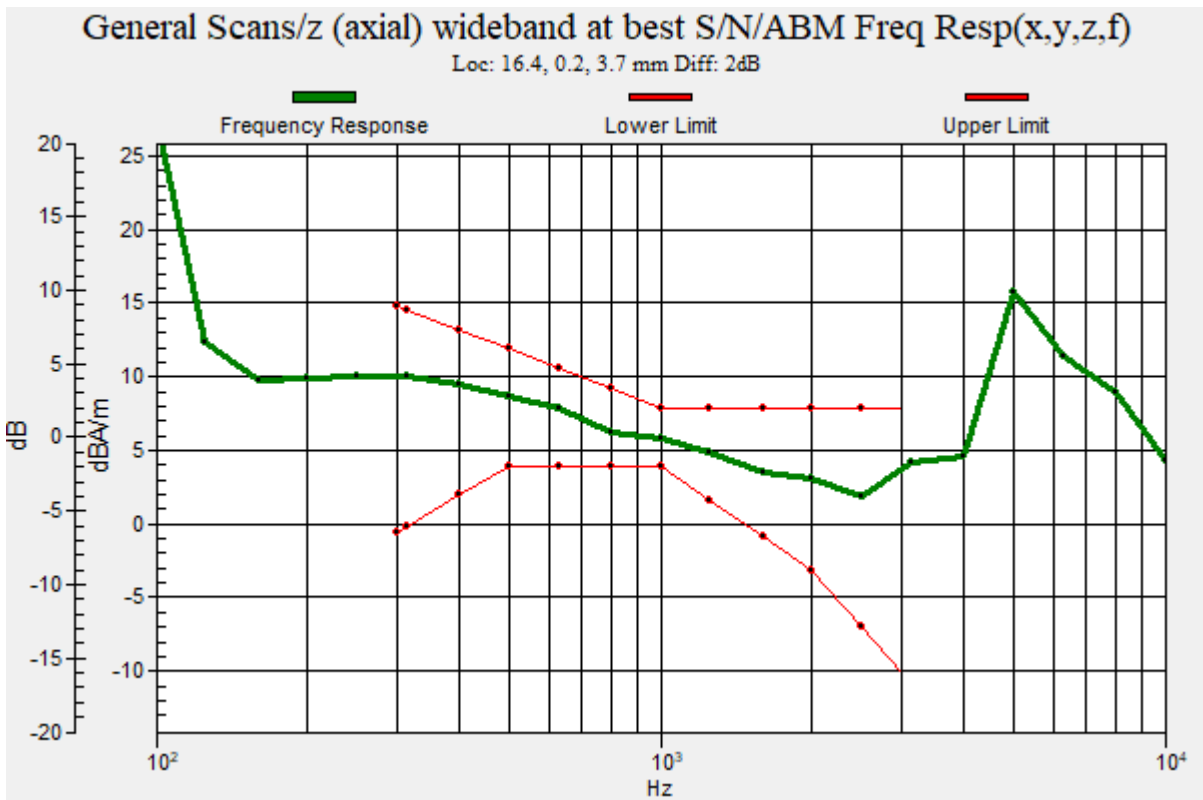

Plot No.138

LTE 41 QPSK 20MHz 100RB 0offset 40620ch 2 6 Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, LTE Band 41 (FCC) (0); Frequency: 2593 MHz;Duty Cycle: 1:4.66659
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.25 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

Cursor:

ABM2 = -37.82 dBA/m

Location: 12.5, 4.2, 3.7 mm


Cursor:

ABM1/ABM2 = 38.07 dB

ABM1 comp = 0.25 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 4.2, 3.7 mm

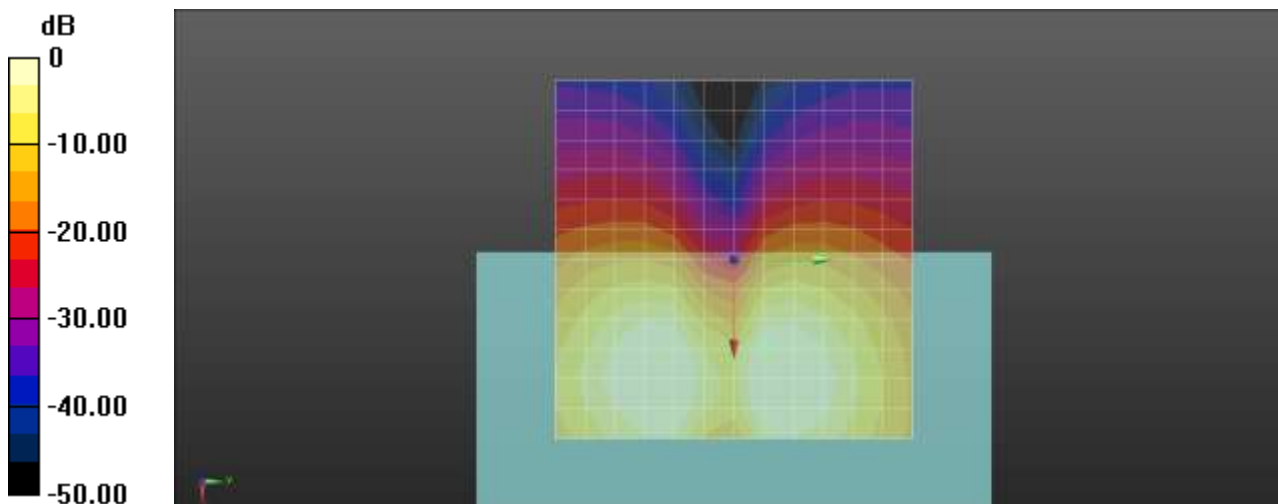

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.139

802.11b 1Mbps 6ch Bit rate 75 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = 7.43 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -39.84 dBA/m
Location: 12.5, 0, 3.7 mm

Cursor:

ABM1/ABM2 = 47.27 dB
ABM1 comp = 7.43 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 0, 3.7 mm

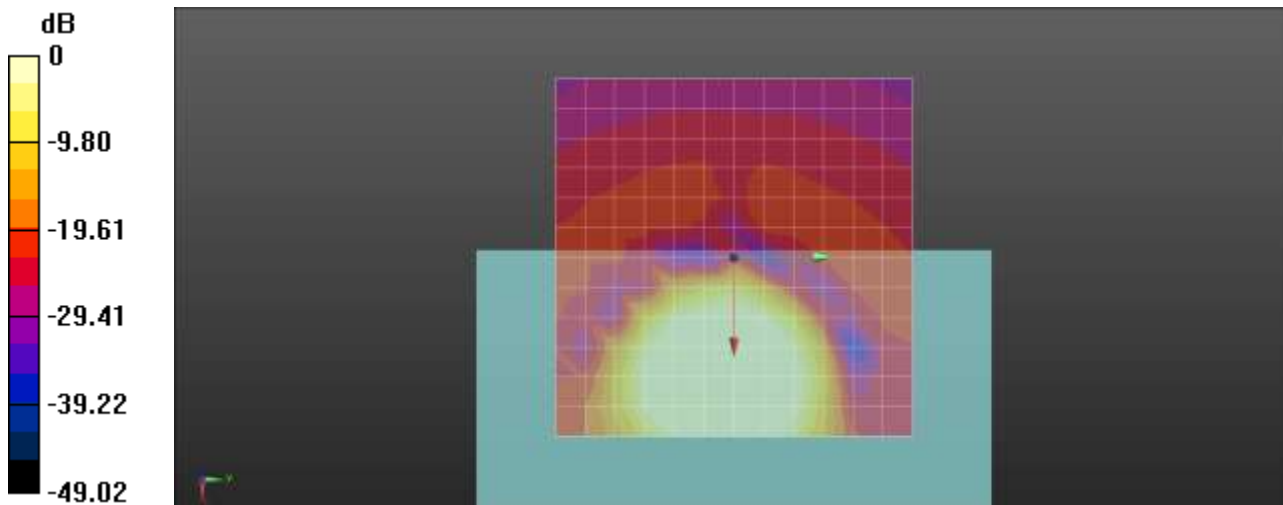

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.140

802.11b 1Mbps 6ch Bit rate 75 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.48 dB

Location: 15, -2.9, 3.7 mm

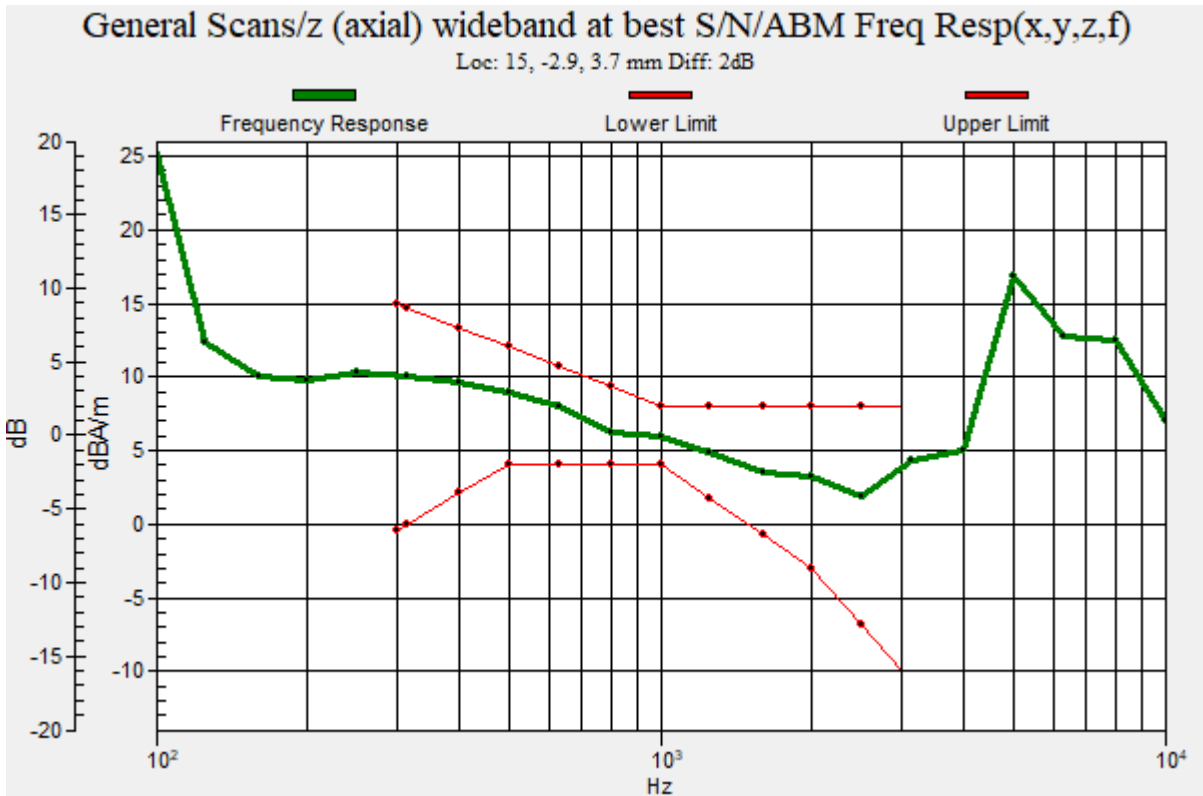

Plot No.141

802.11b 1Mbps 6ch Bit rate 75 y(trnavsersal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, 2450MHz FCC (0); Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.45 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -12.5, 3.7 mm

Cursor:

ABM2 = -39.65 dBA/m

Location: 16.7, -12.5, 3.7 mm


Cursor:

ABM1/ABM2 = 42.10 dB

ABM1 comp = 2.45 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, -12.5, 3.7 mm

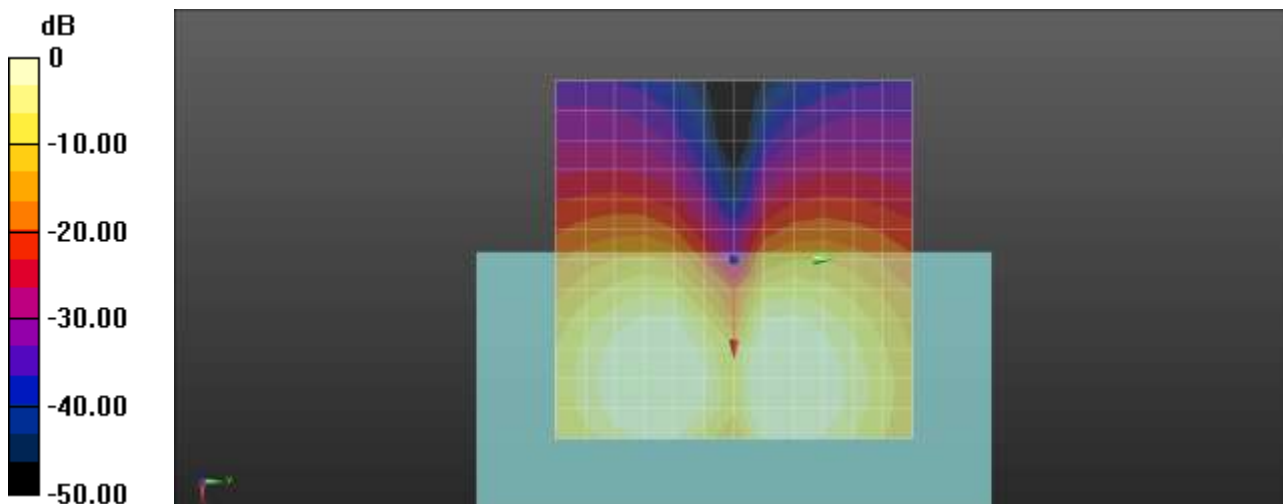

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.142

802.11n20 MCS3 40ch Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.77 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -38.18 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 47.95 dB

ABM1 comp = 9.77 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

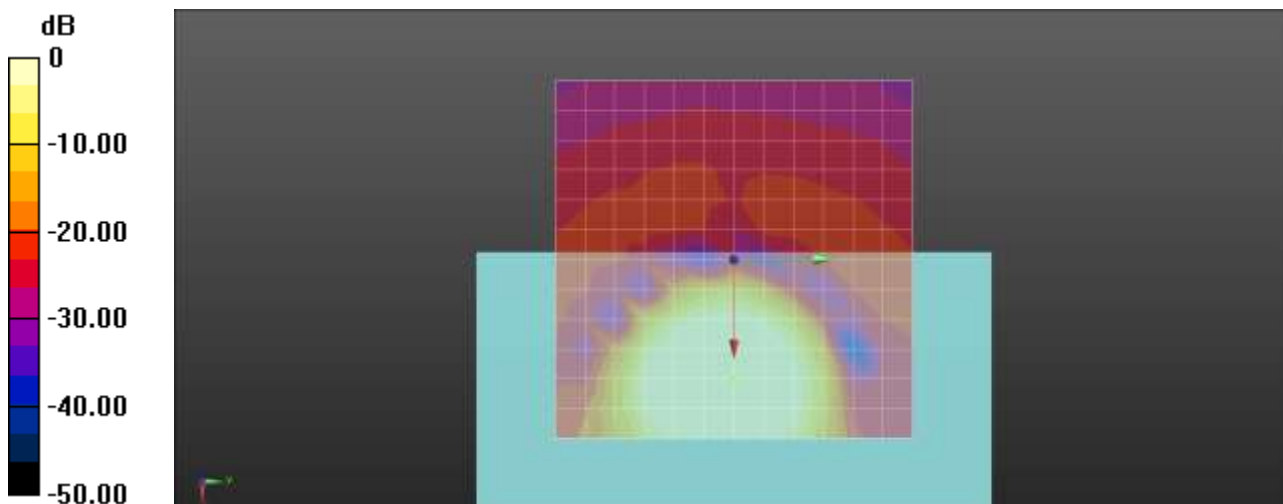

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.143

802.11n20 MCS3 40ch Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.48 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.90 dB

BWC Factor = 9.48 dB

Location: 14.9, -0.4, 3.7 mm

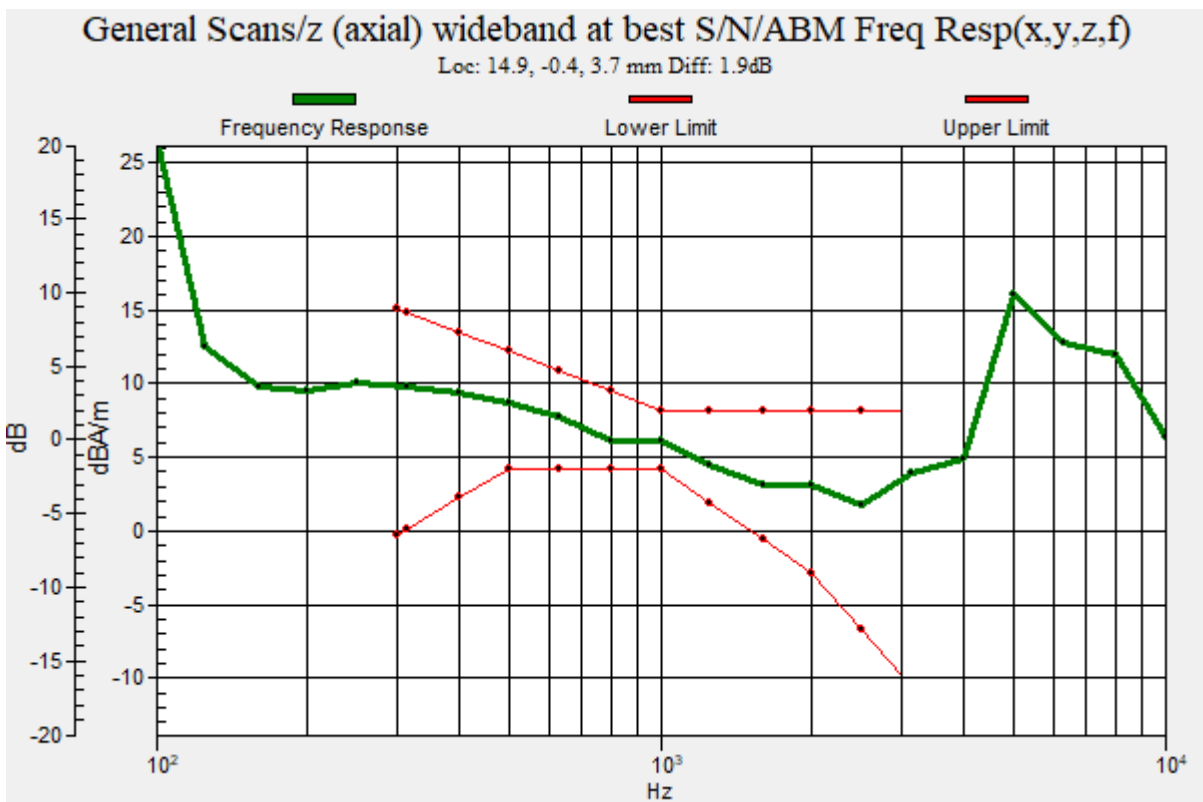

Plot No.144

802.11n20 MCS3 40ch Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5200 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 0.45 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -39.89 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 40.34 dB

ABM1 comp = 0.45 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

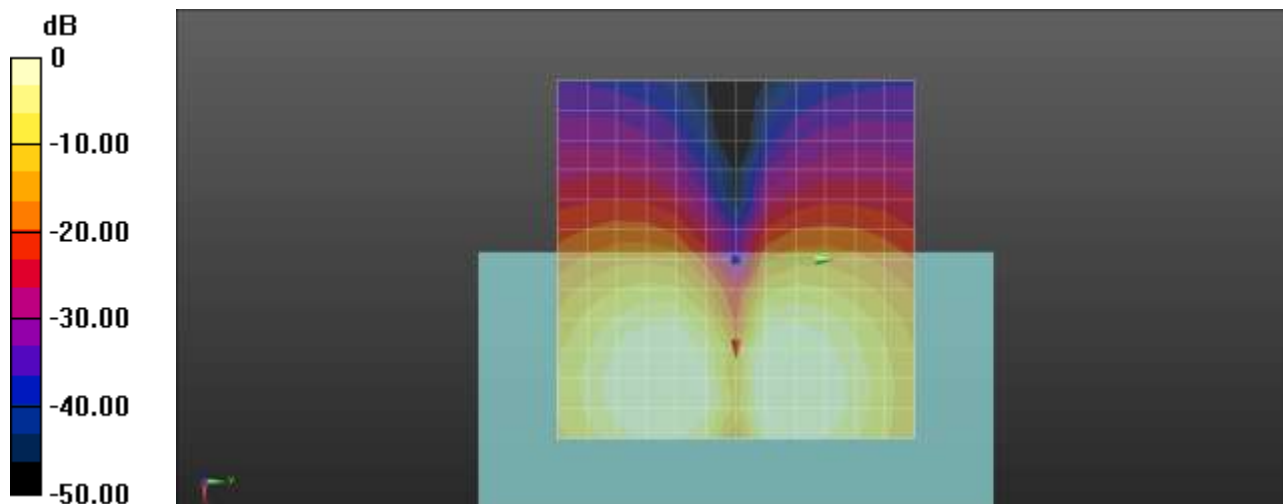

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.145

802.11n20 MCS3 56ch Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 6.79 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -40.80 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 47.59 dB

ABM1 comp = 6.79 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

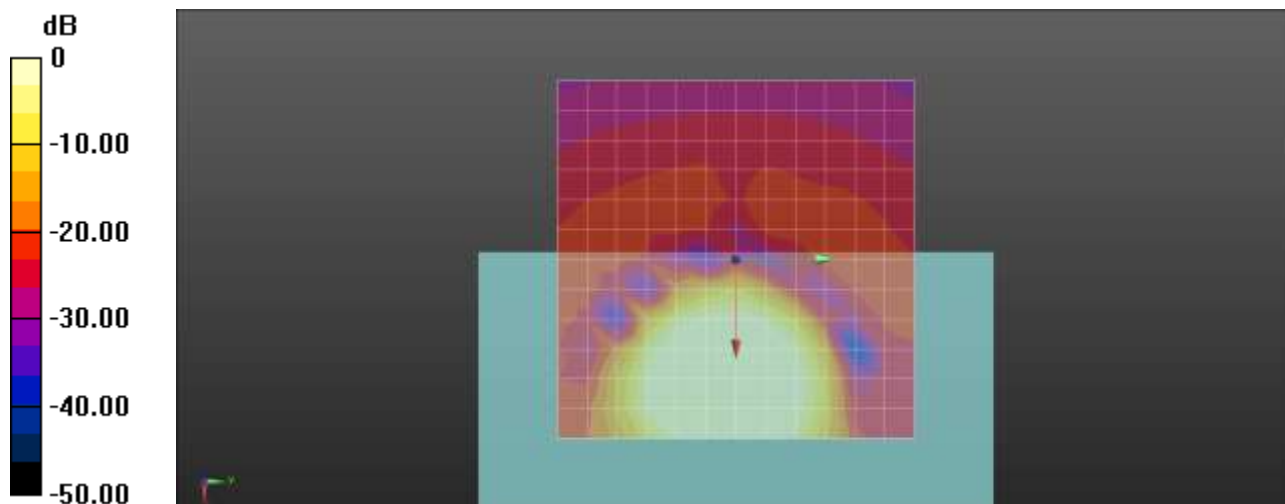

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.146

802.11n20 MCS3 56ch Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 1.97 dB

BWC Factor = 9.47 dB

Location: 14.9, -2.1, 3.7 mm

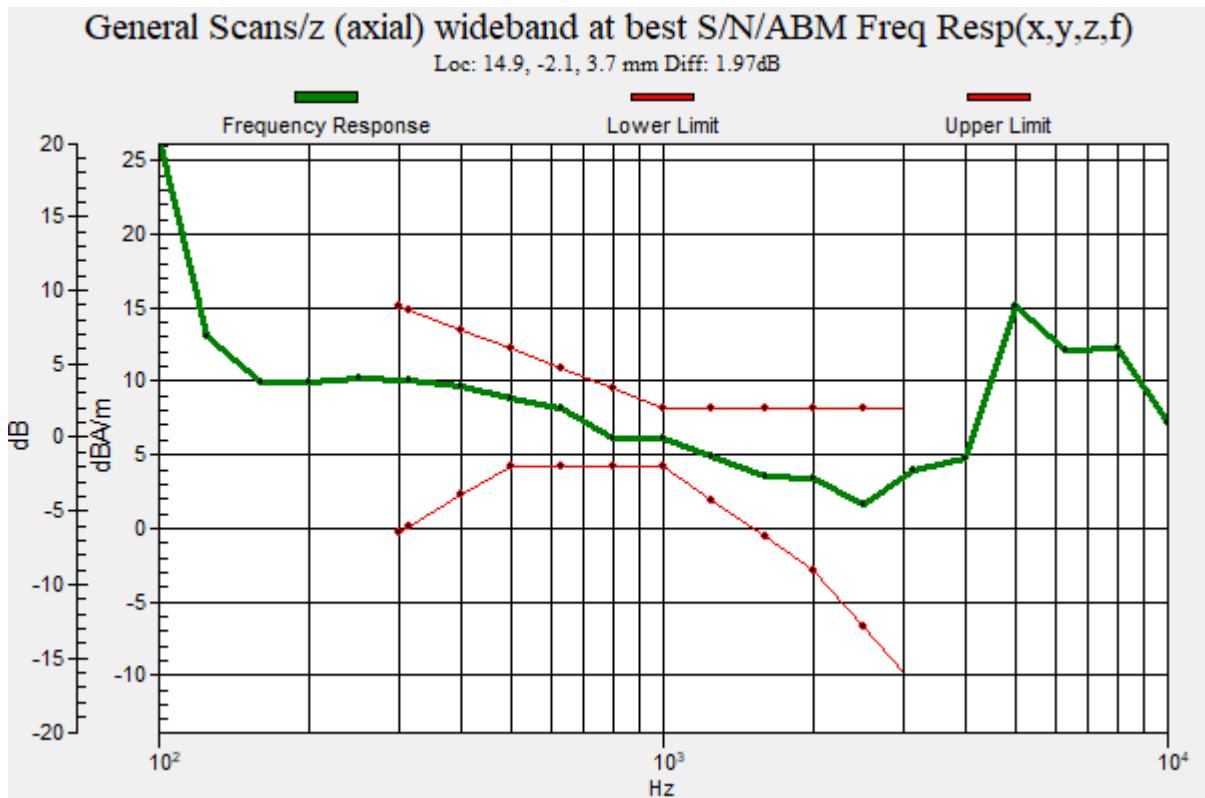

Plot No.147

802.11n20 MCS3 56ch Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5280 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -39.66 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 40.75 dB

ABM1 comp = 1.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

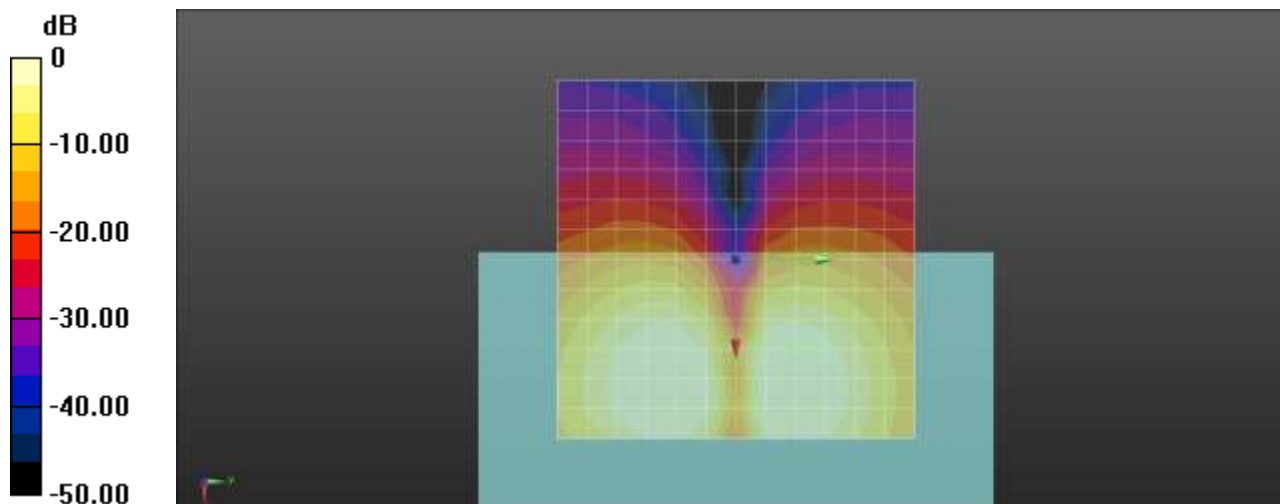

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.148

802.11n20 MCS3 120ch Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 7.14 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -40.35 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 47.49 dB

ABM1 comp = 7.14 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

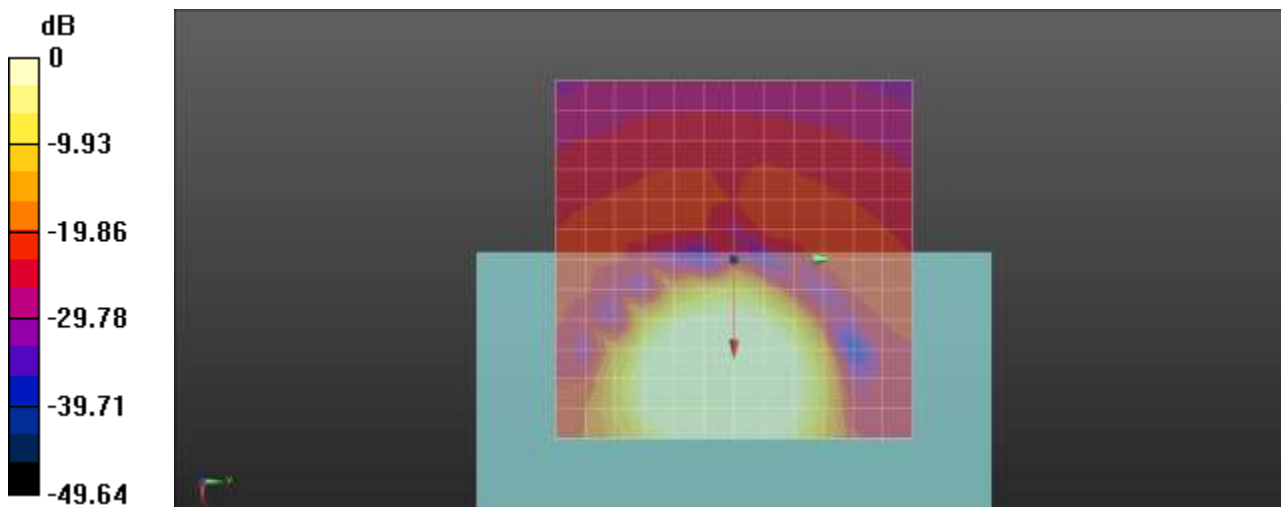

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.149

802.11n20 MCS3 120ch Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 13, -1.7, 3.7 mm

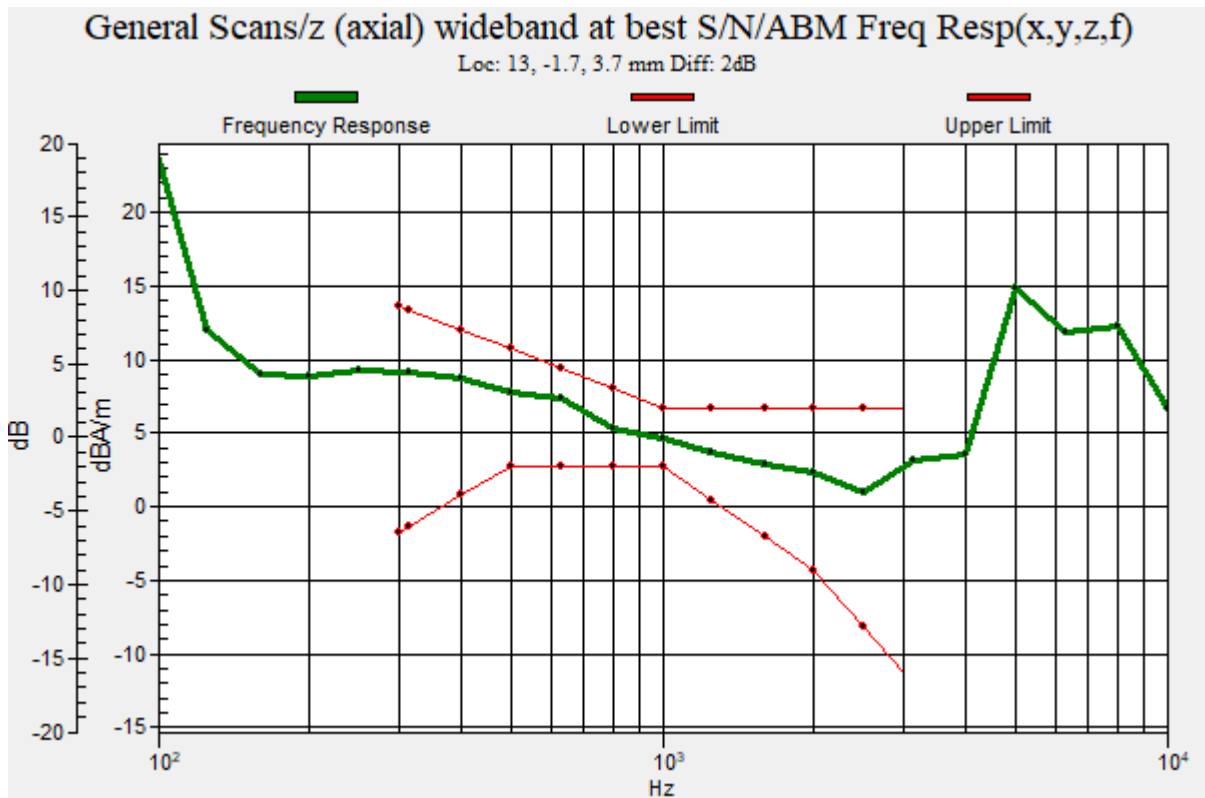

Plot No.150

802.11n20 MCS3 120ch Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5600 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
BWC applied: 0.16 dB
Device Reference Point: 0, 0, -6.3 mm

Cursor:


ABM1 comp = 0.85 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -39.62 dBA/m
Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM1/ABM2 = 40.47 dB
ABM1 comp = 0.85 dBA/m
BWC Factor = 0.16 dB
Location: 12.5, 8.3, 3.7 mm

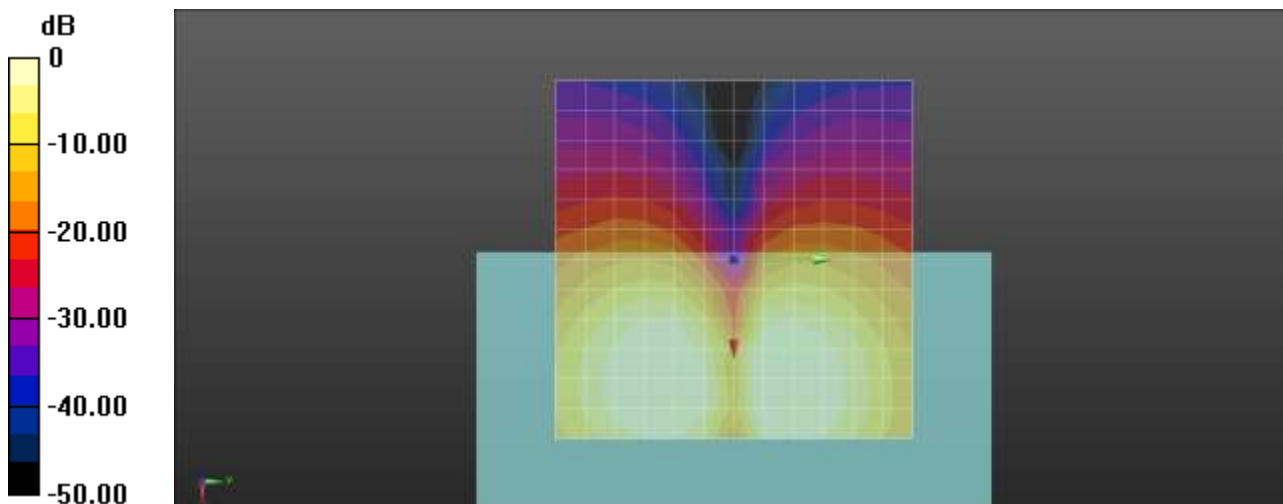

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.151

802.11n20 MCS3 157ch Bit rate 6 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 7.16 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -40.49 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 47.65 dB

ABM1 comp = 7.16 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

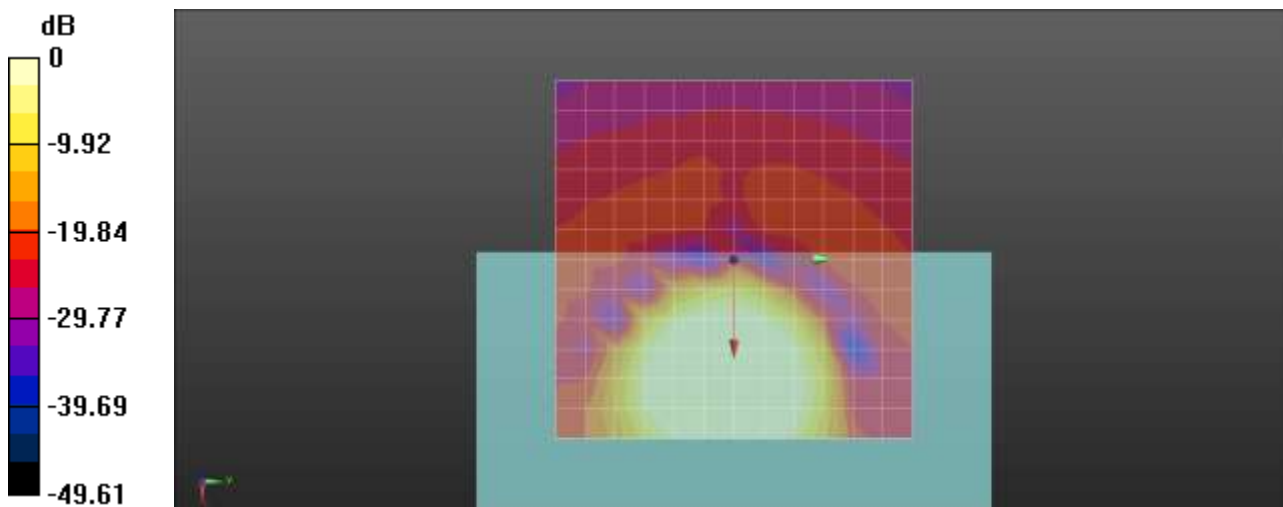

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.152

802.11n20 MCS3 157ch Bit rate 6 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 13.9, -2.5, 3.7 mm

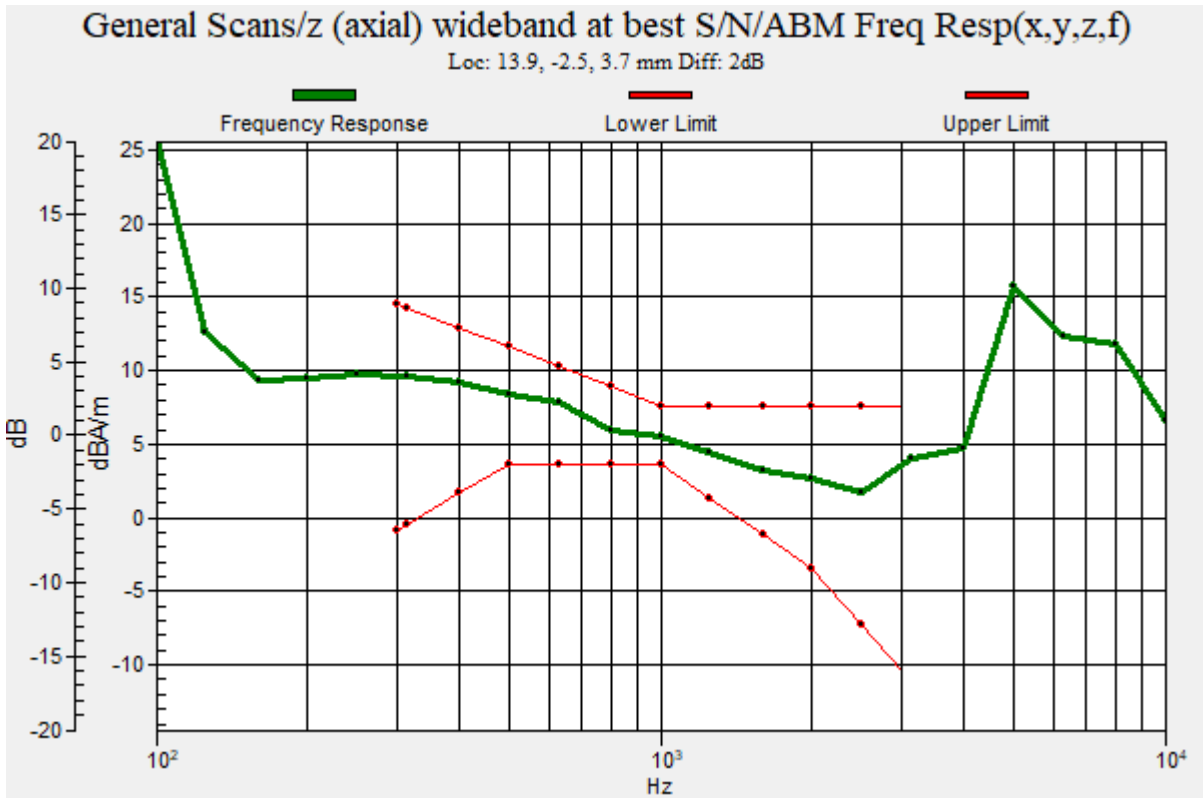

Plot No.153

802.11n20 MCS3 157ch Bit rate 6 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, WIFI 5GHz (0); Frequency: 5785 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.38 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -39.66 dBA/m

Location: 12.5, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 41.04 dB

ABM1 comp = 1.38 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

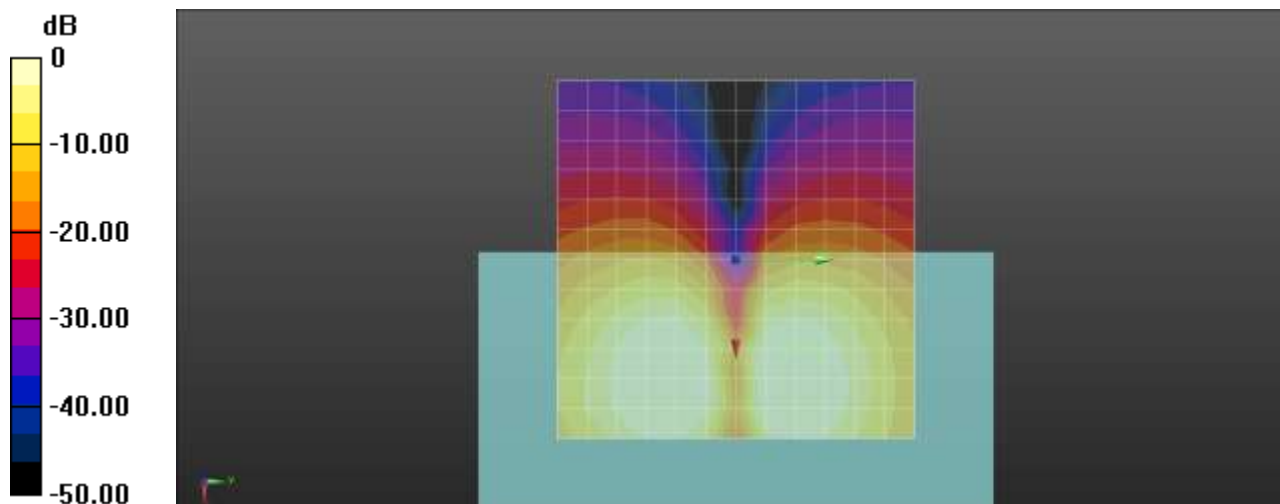

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.154

EVDO BC0 Rev.A 384ch Bit rate 40 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.59 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -43.31 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 52.90 dB

ABM1 comp = 9.59 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

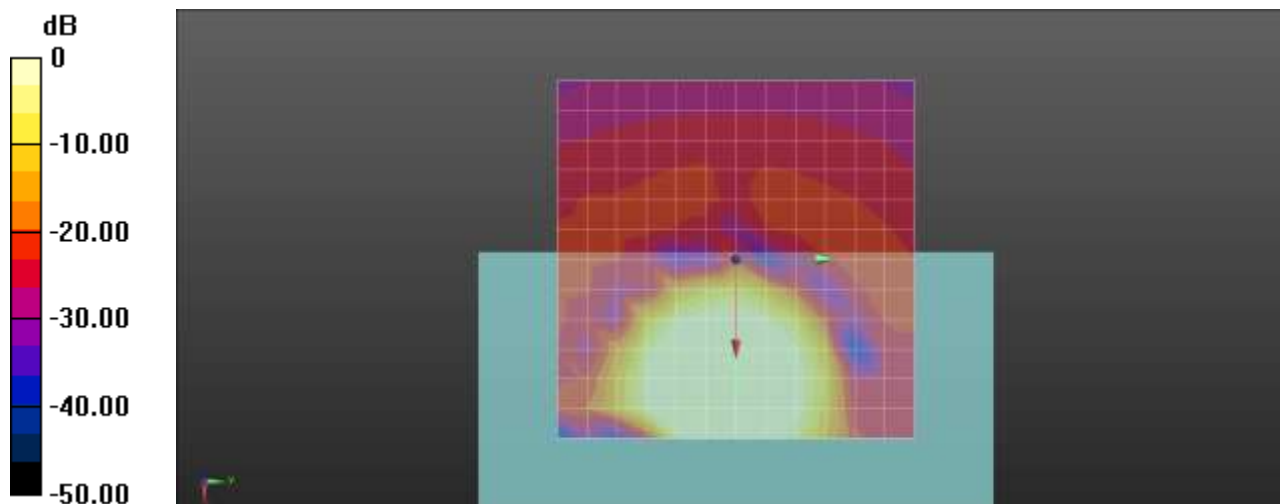

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.155

EVDO BC0 Rev.A 384ch Bit rate 40 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best

S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 14.7, -0.3, 3.7 mm

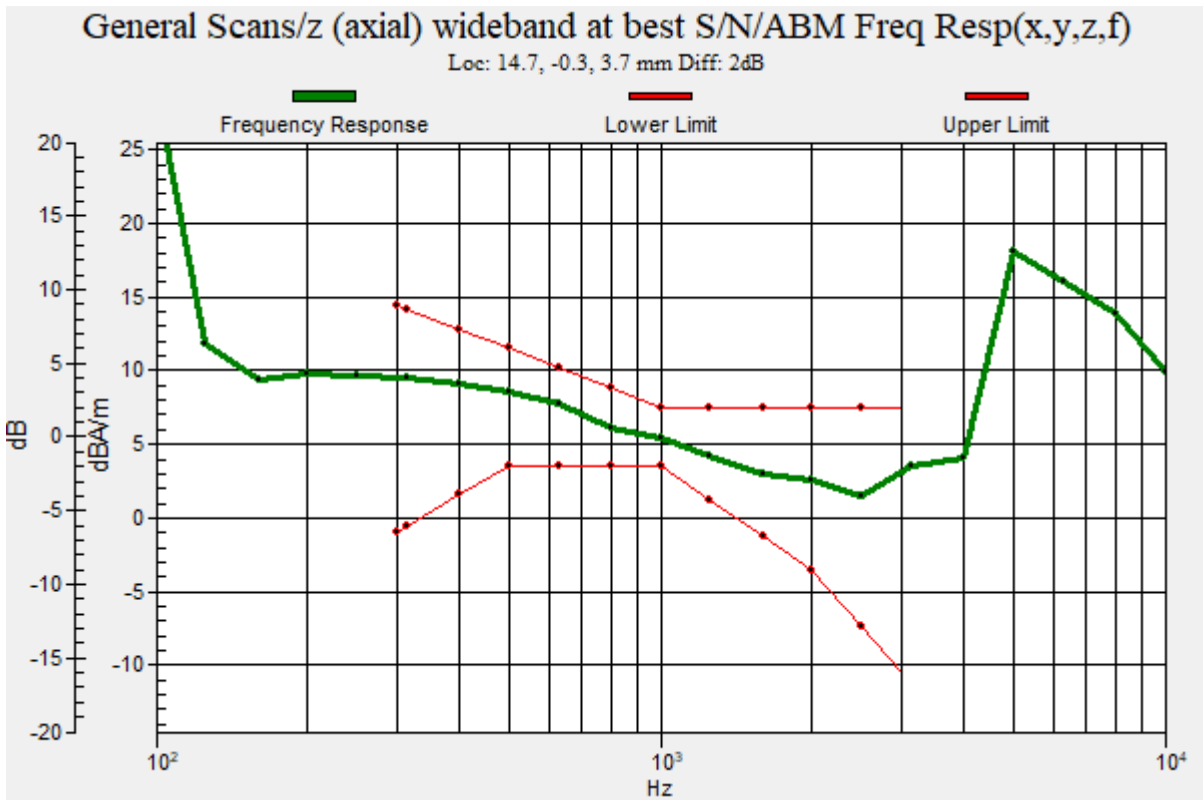

Plot No.156

EVDO BC0 Rev.A 384ch Bit rate 40 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA 835MHz FCC (0); Frequency: 836.52 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.54 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -44.34 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 46.88 dB

ABM1 comp = 2.54 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

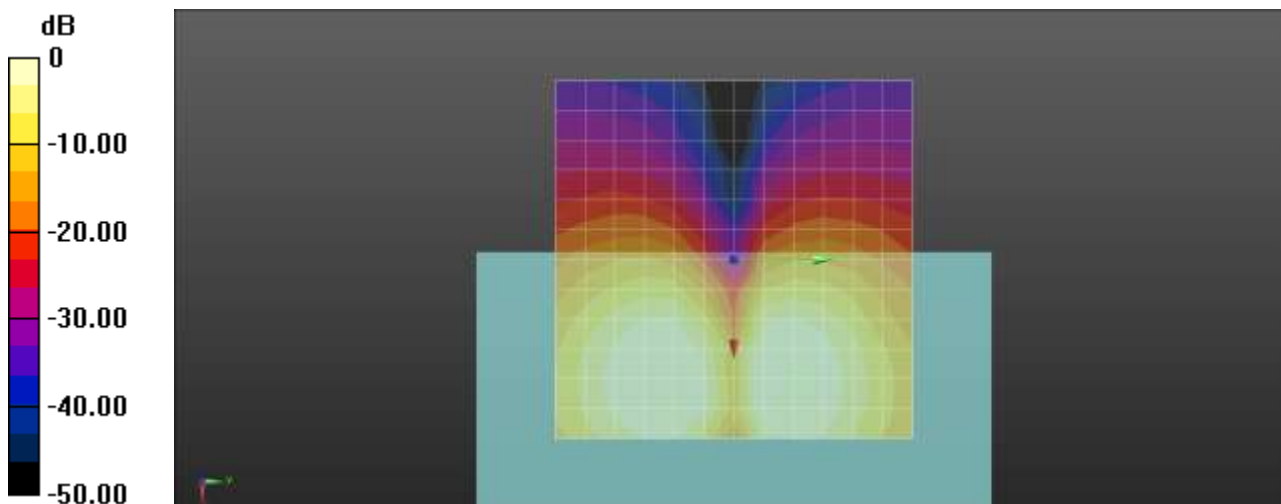

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.157

EVDO BC1 Rev.A 600ch Bit rate 40 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 EVDO(1900MHz) (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 9.61 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

Cursor:

ABM2 = -44.13 dBA/m

Location: 16.7, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 53.75 dB

ABM1 comp = 9.61 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 0, 3.7 mm

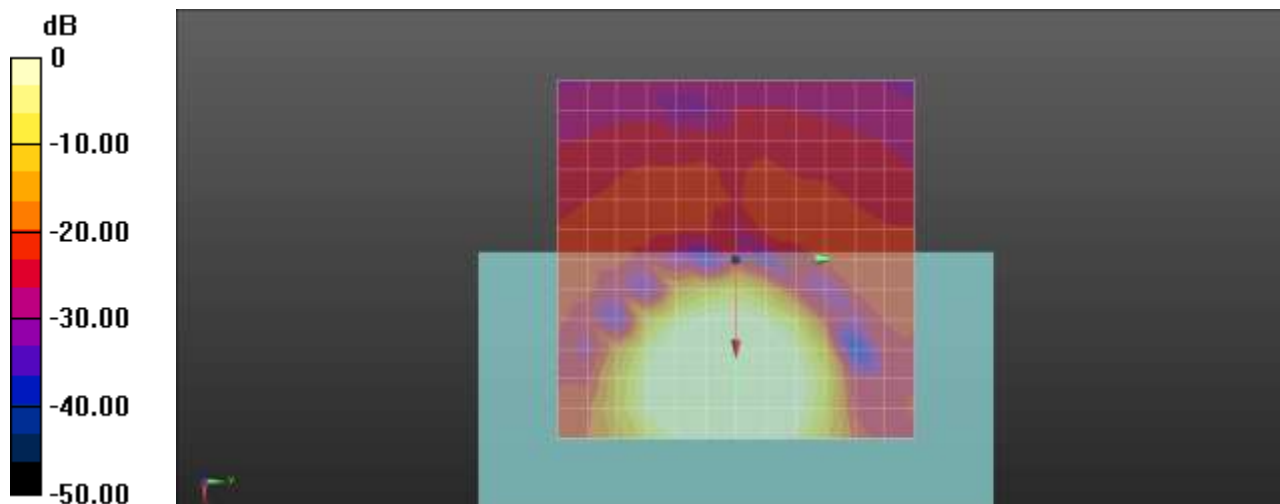

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.158

EVDO BC1 Rev.A 600ch Bit rate 40 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 EVDO(1900MHz) (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 16, 0.2, 3.7 mm

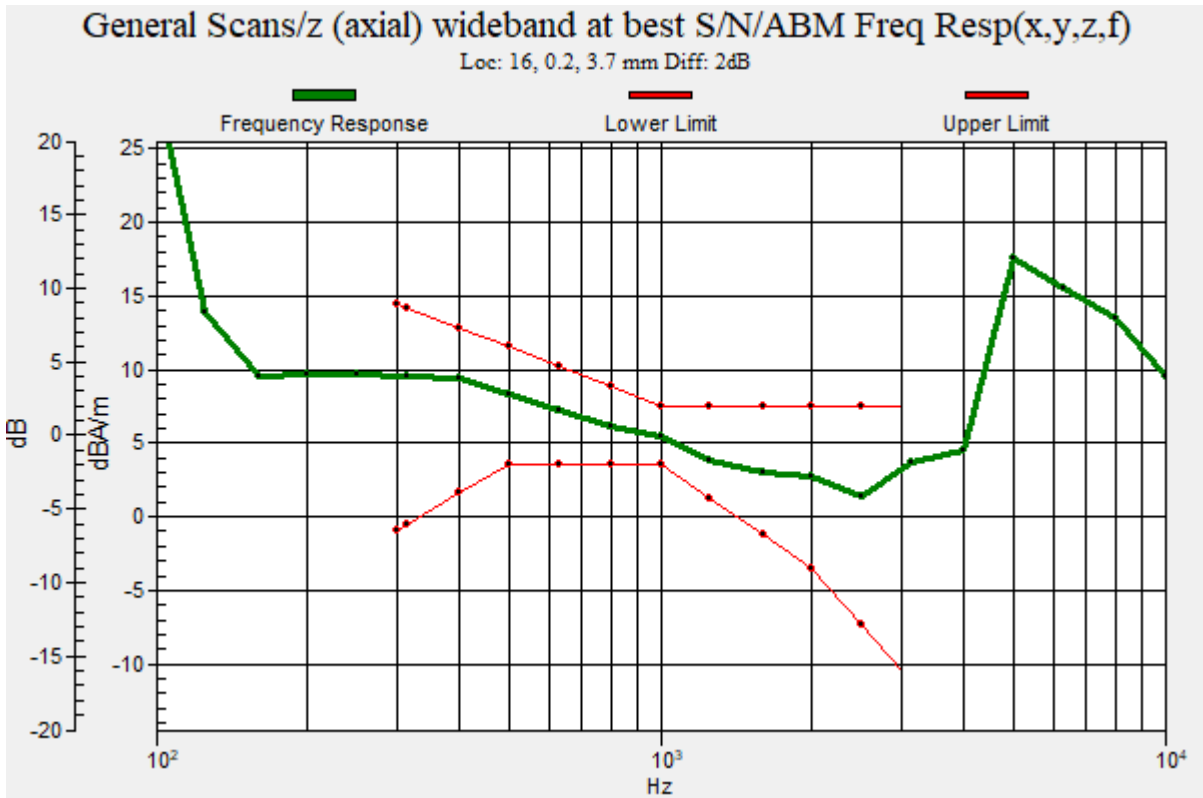

Plot No.159

EVDO BC1 Rev.A 600ch Bit rate 40 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, CDMA BC1 EVDO(1900MHz) (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 2.88 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

Cursor:

ABM2 = -43.71 dBA/m

Location: 16.7, 8.3, 3.7 mm


Cursor:

ABM1/ABM2 = 46.59 dB

ABM1 comp = 2.88 dBA/m

BWC Factor = 0.16 dB

Location: 16.7, 8.3, 3.7 mm

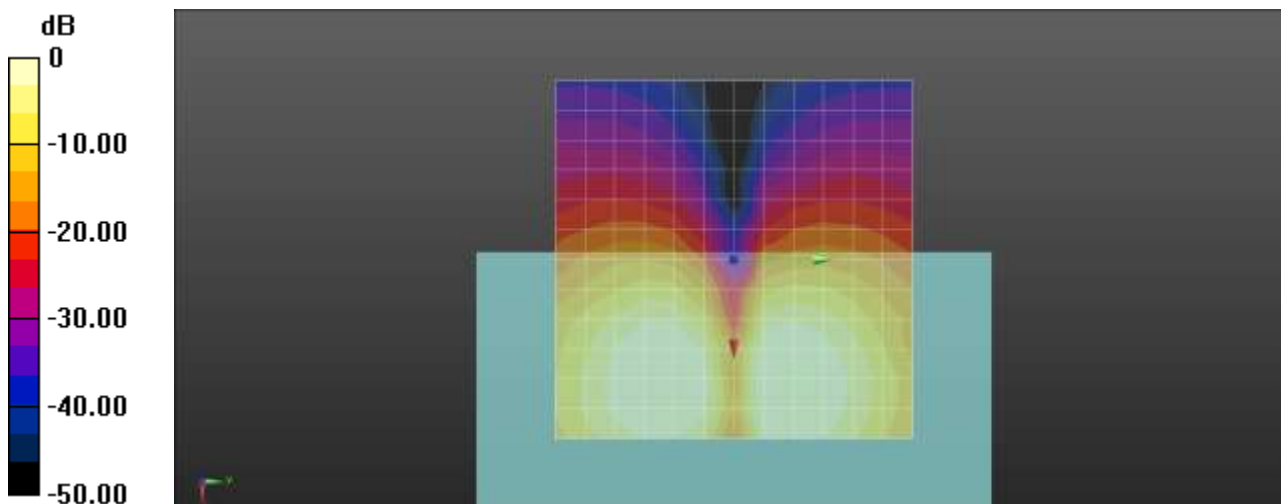

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.160

EVDO BC10 Rev.A 450ch Bit rate 40 z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, BC10 (0); Frequency: 817.25 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 8.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

Cursor:

ABM2 = -42.46 dBA/m

Location: 12.5, 0, 3.7 mm


Cursor:

ABM1/ABM2 = 50.56 dB

ABM1 comp = 8.09 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 0, 3.7 mm

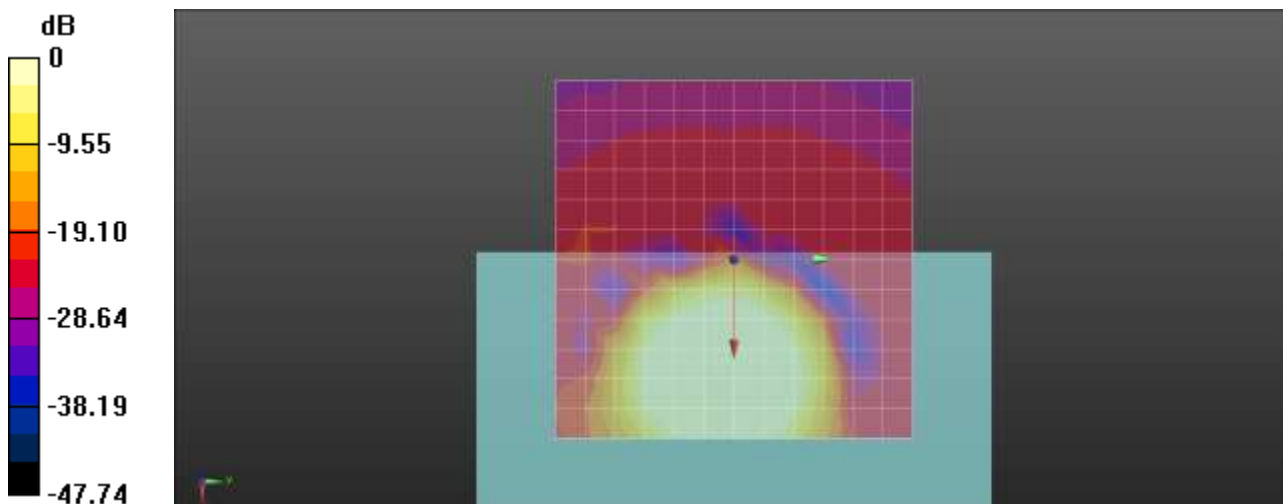

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.161

EVDO BC10 Rev.A 450ch Bit rate 40 Freq.Response

DUT: SM-G781V; Type: Bar

Communication System: UID 0, BC10 (0); Frequency: 817.25 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) wideband at best S/N/ABM Freq Resp(x,y,z,f) (1x1x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_Normal_51s new.wav

Output Gain: 61.5

Measure Window Start: 300ms

Measure Window Length: 51000ms

BWC applied: 9.47 dB

Device Reference Point: 0, 0, -6.3 mm


| Category | Telephone parameters WD signal quality [(signal+noise)-to-noise ratio in decibels] |
|-------------|--|
| Category T1 | 0 dB to 10 dB |
| Category T2 | 10 dB to 20 dB |
| Category T3 | 20 dB to 30 dB |
| Category T4 | > 30 dB |

Cursor:

Diff = 2.00 dB

BWC Factor = 9.47 dB

Location: 14.7, 3.1, 3.7 mm

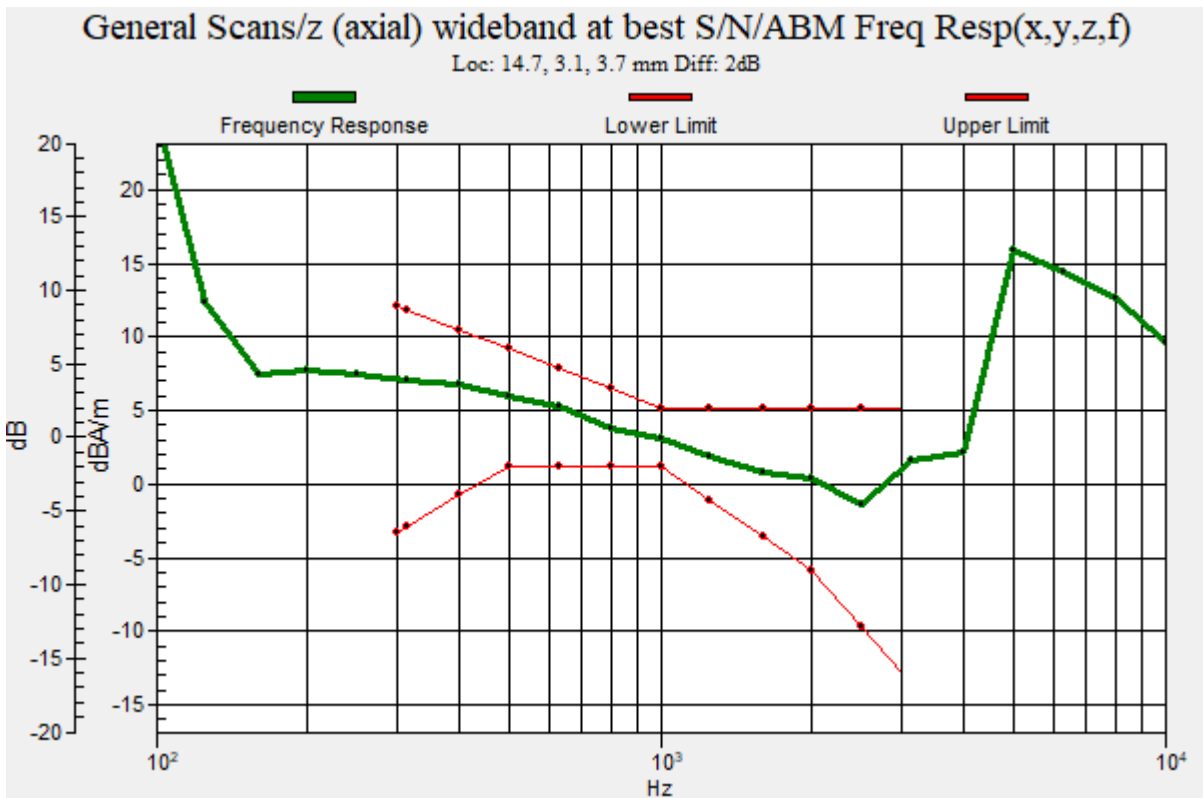

Plot No.162

EVDO BC10 450ch Bit rate 40 y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, BC10 (0); Frequency: 817.25 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3049; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE4 Sn868; Calibrated: 2019-09-04
- Phantom: HAC Test Arch with AMCC TCOIL
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Signal(x,y,z) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms

Measure Window Length: 1000ms

BWC applied: 0.16 dB

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM1 comp = 1.35 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

Cursor:

ABM2 = -44.37 dBA/m

Location: 12.5, 8.3, 3.7 mm



Cursor:

ABM1/ABM2 = 45.72 dB

ABM1 comp = 1.35 dBA/m

BWC Factor = 0.16 dB

Location: 12.5, 8.3, 3.7 mm

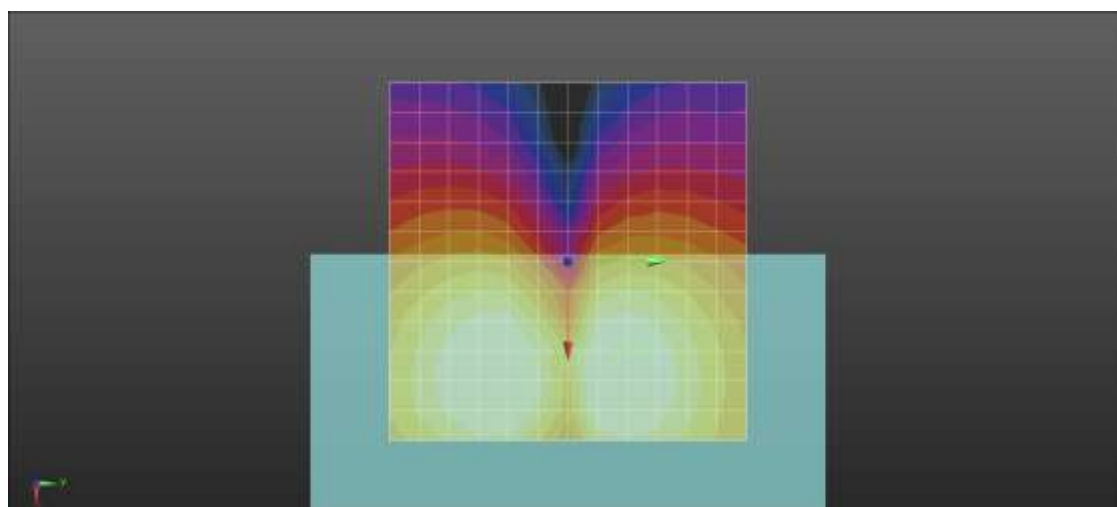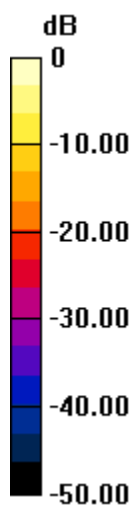

0 dB = 1.000 A/m = 0.00 dBA/m

Plot No.163

NR Band 2 CP-OFDM 16QAM 20MHz 1RB 104offset 376000ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -42.05 dBA/m
 Location: 16.7, 0, 3.7 mm

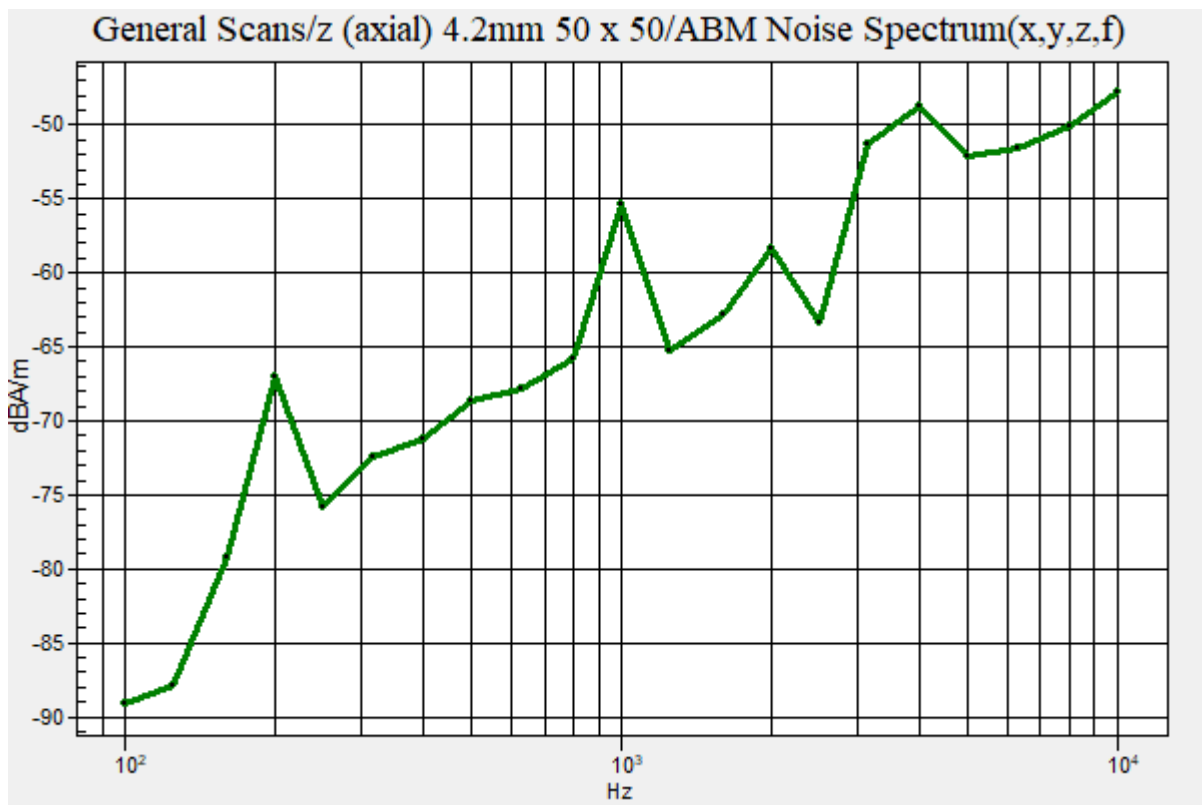

Plot No.164

NR Band 2 CP-OFDM 16QAM 20MHz 1RB 104offset 376000ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.22 dBA/m

Location: 12.5, 8.3, 3.7 mm

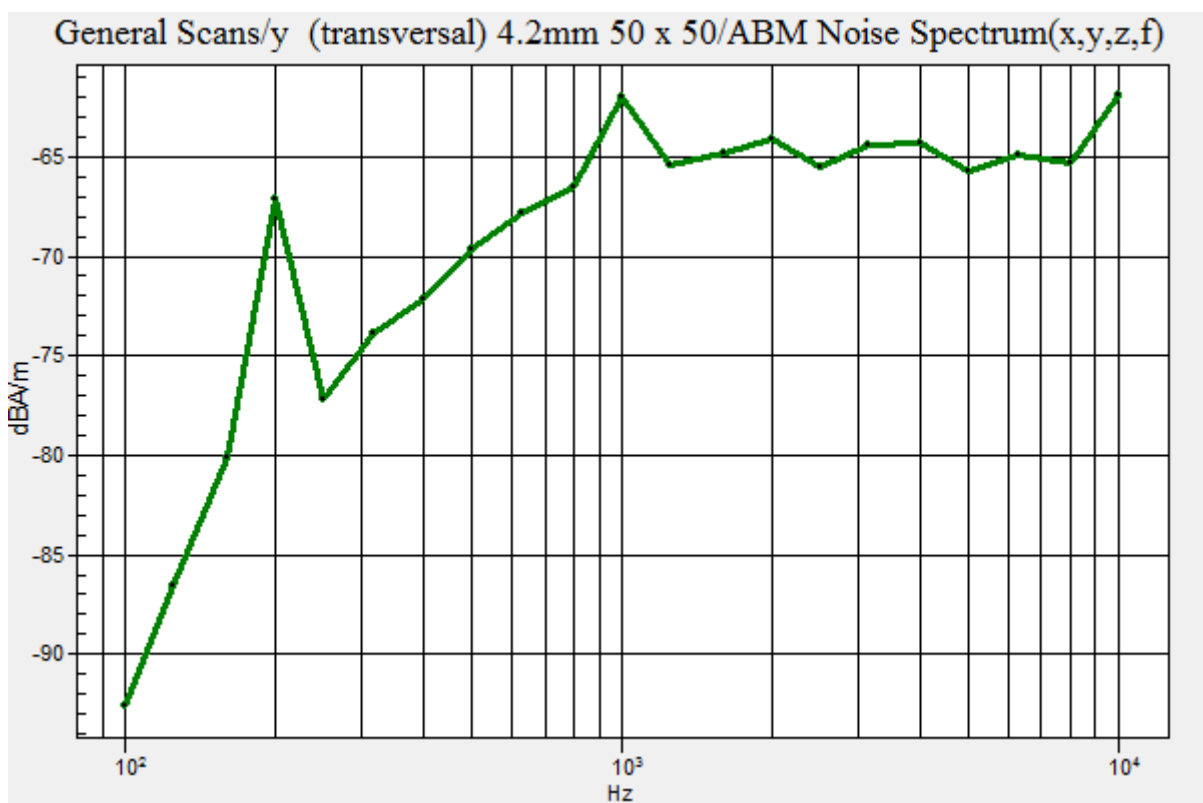

Plot No.165

NR Band 5 CP-OFDM 16QAM 20MHz 1RB 104offset 167300ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x

50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -41.45 dBA/m

Location: 16.7, 0, 3.7 mm

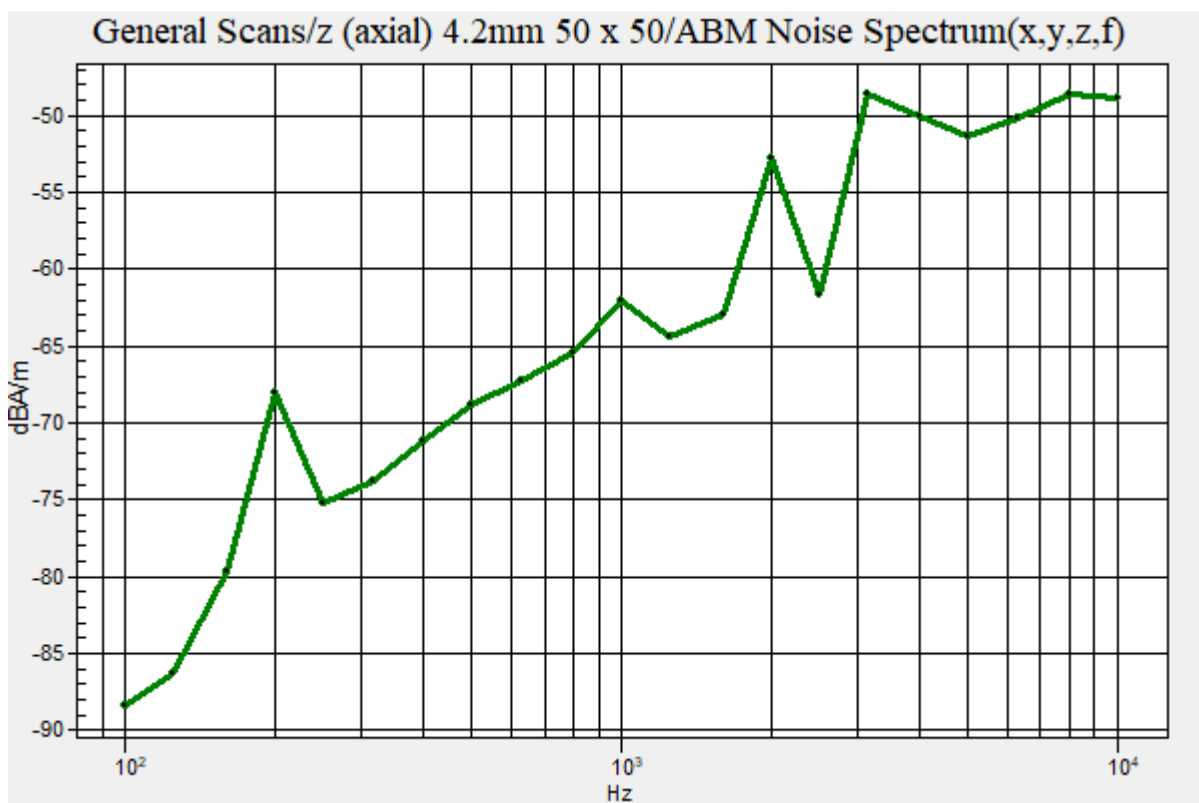

Plot No.166

NR Band 5 CP-OFDM 16QAM 20MHz 1RB 104offset 167300ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.90 dBA/m
 Location: 12.5, 8.3, 3.7 mm

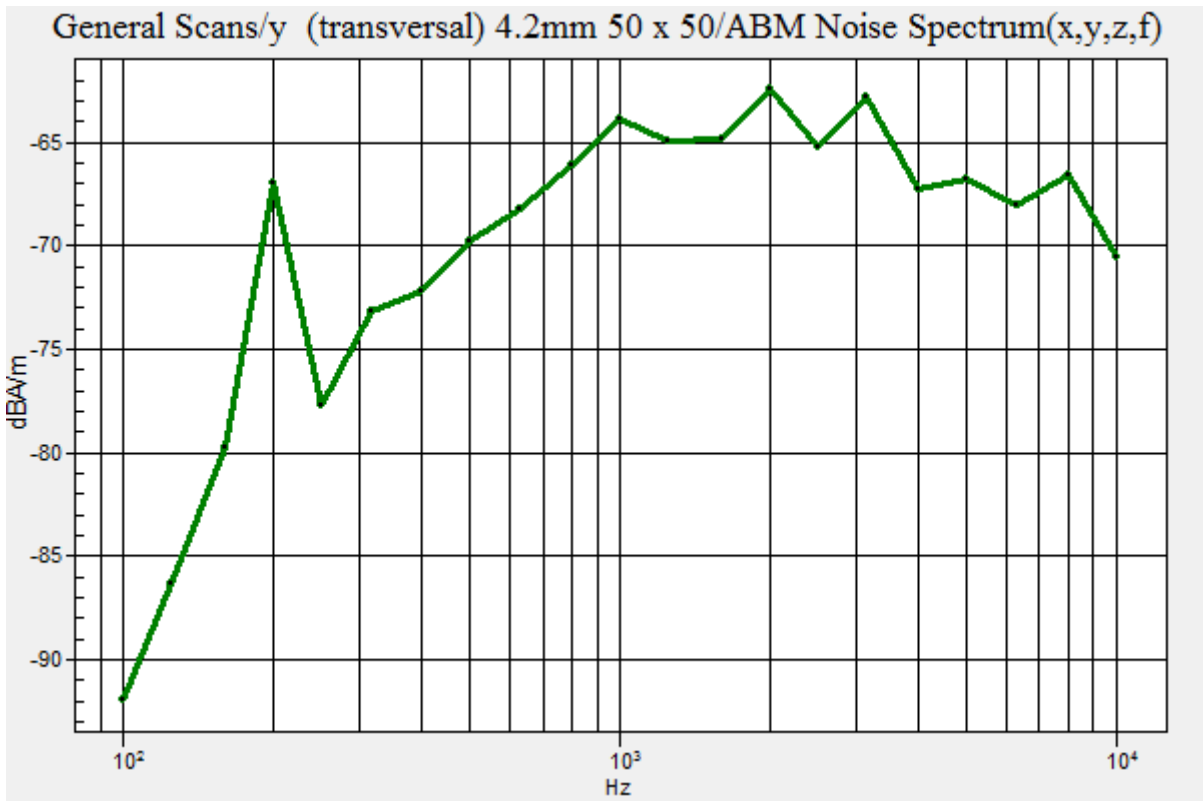

Plot No.167

NR Band 25 CP-OFDM 16QAM 20MHz 1RB 104offset 376500ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR n25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -42.92 dBA/m

Location: 16.7, 0, 3.7 mm

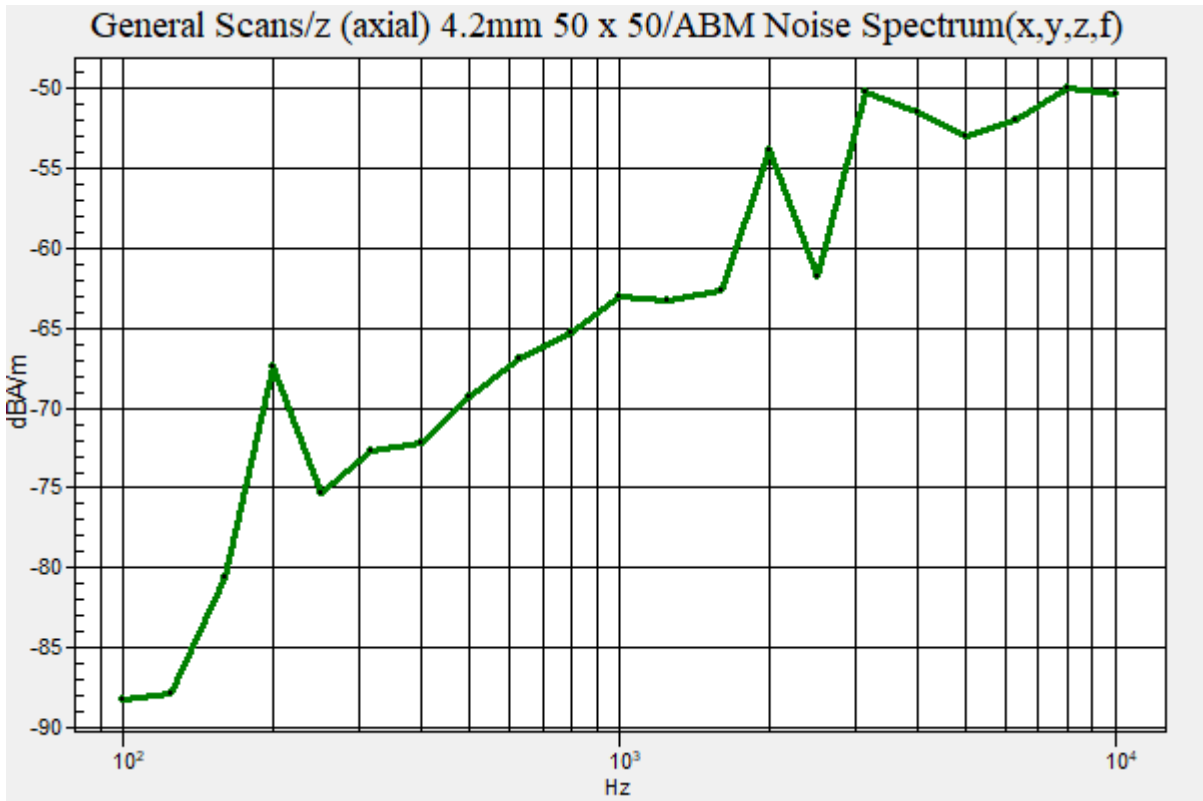

Plot No.168

NR Band 25 CP-OFDM 16QAM 20MHz 1RB 104offset 376500ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR n25 (0); Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -49.80 dBA/m

Location: 16.7, 8.3, 3.7 mm

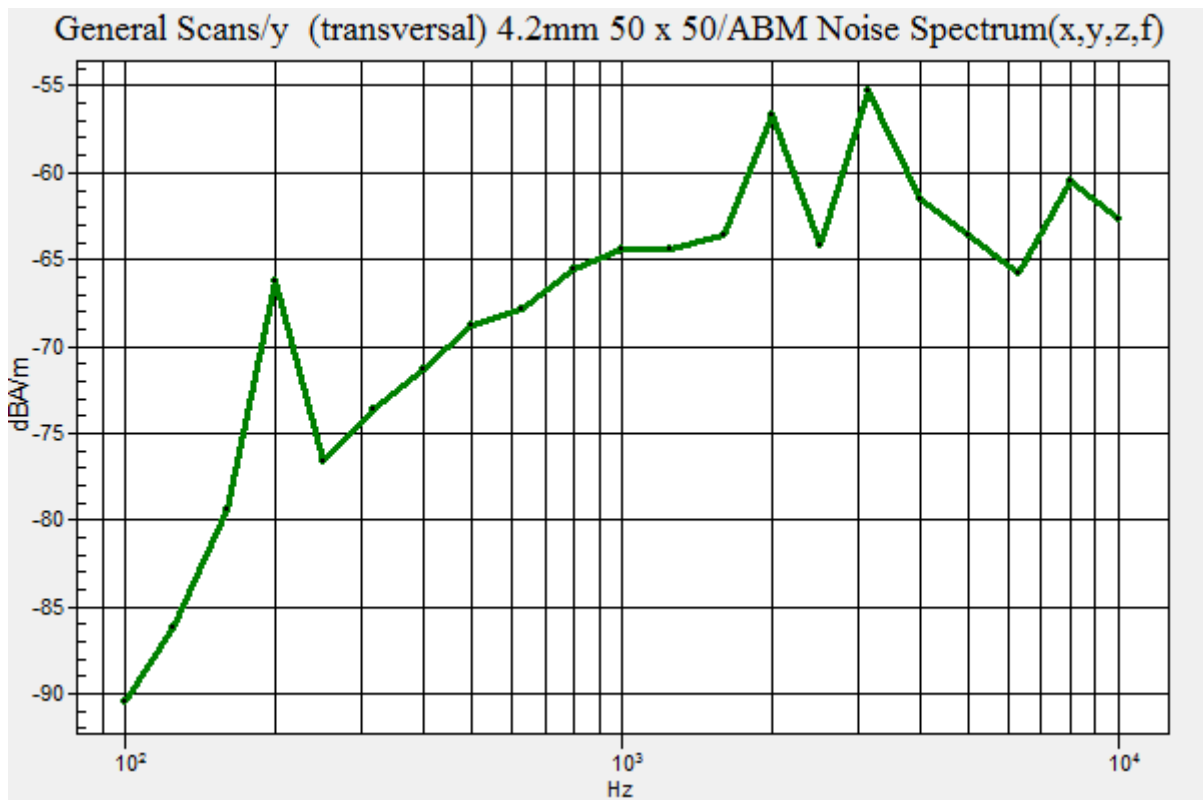

Plot No.169

NR Band 66 CP-OFDM 16QAM 20MHz 1RB 104offset 349000ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -43.23 dBA/m
Location: 16.7, 0, 3.7 mm

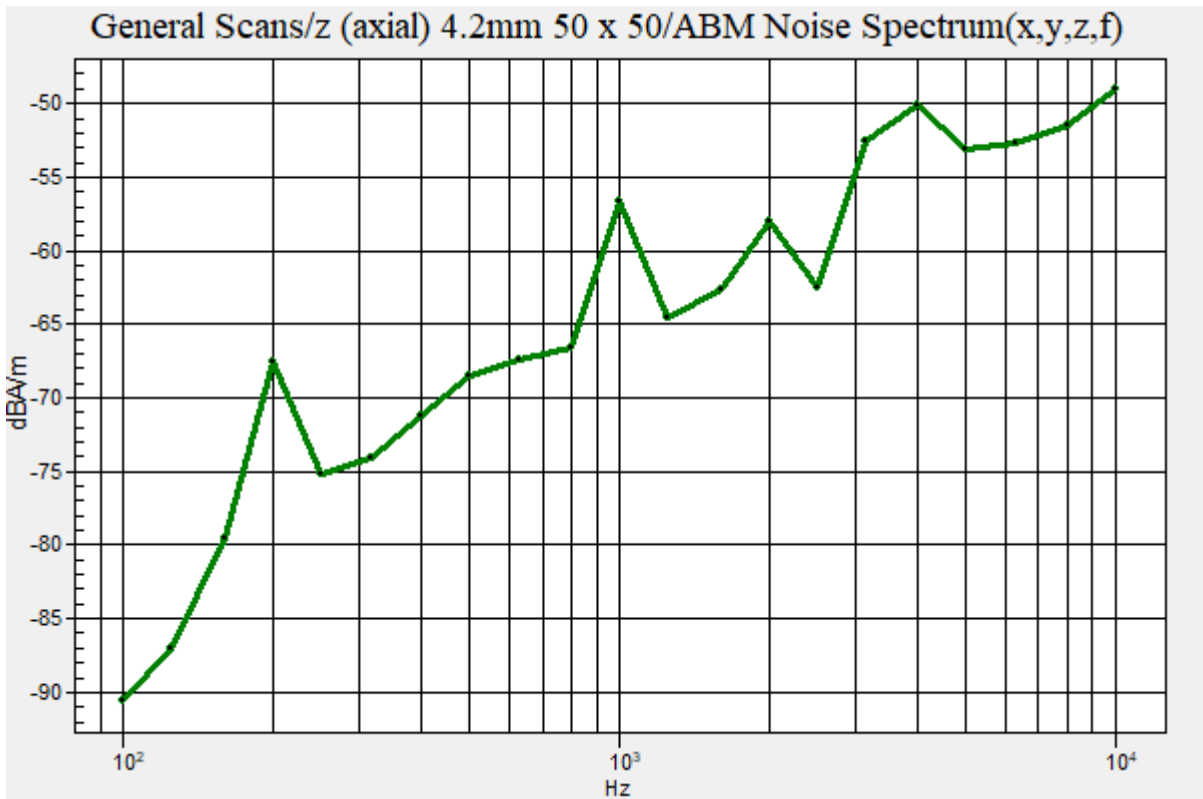

Plot No.170

NR Band 66 CP-OFDM 16QAM 20MHz 1RB 104offset 349000ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 66 (0); Frequency: 1745 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

**T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal)
4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):** Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.80 dBA/m

Location: 12.5, 8.3, 3.7 mm

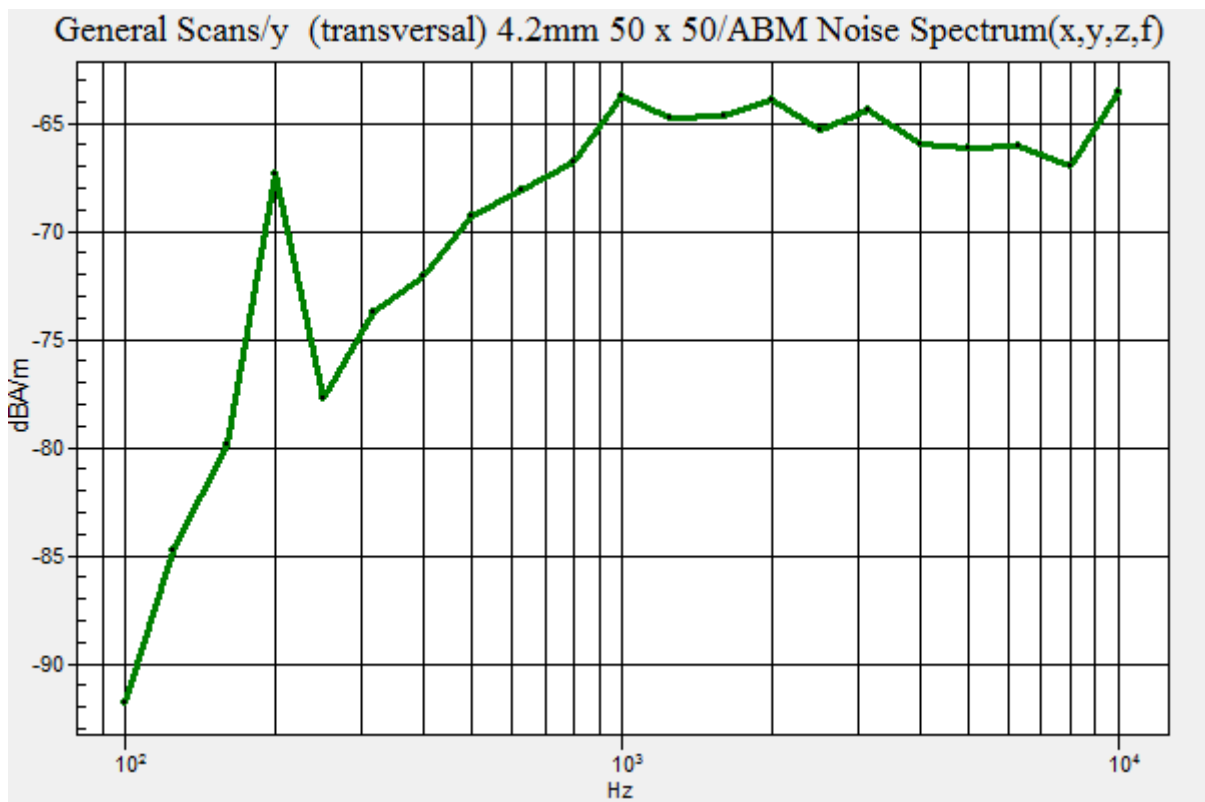

Plot No.171

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 136100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -40.10 dBA/m
Location: 16.7, 0, 3.7 mm

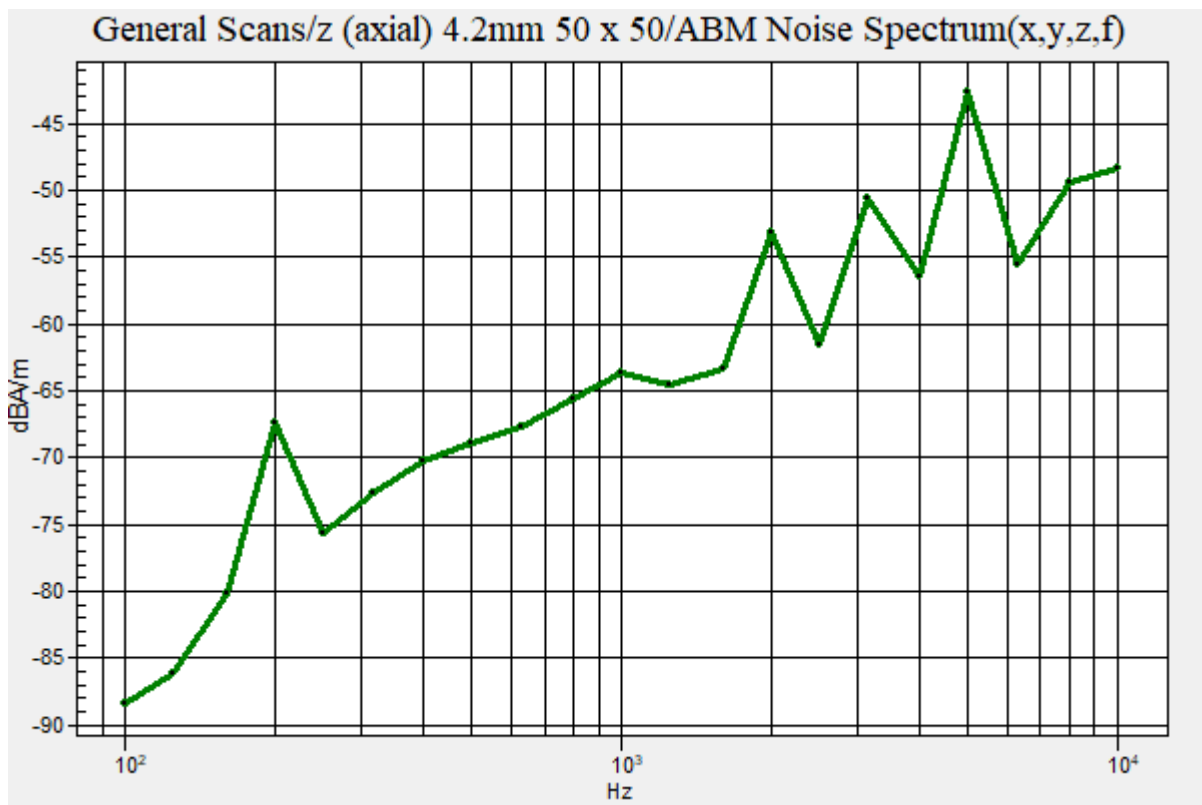

Plot No.172

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 136100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.50 dBA/m
Location: 12.5, 8.3, 3.7 mm

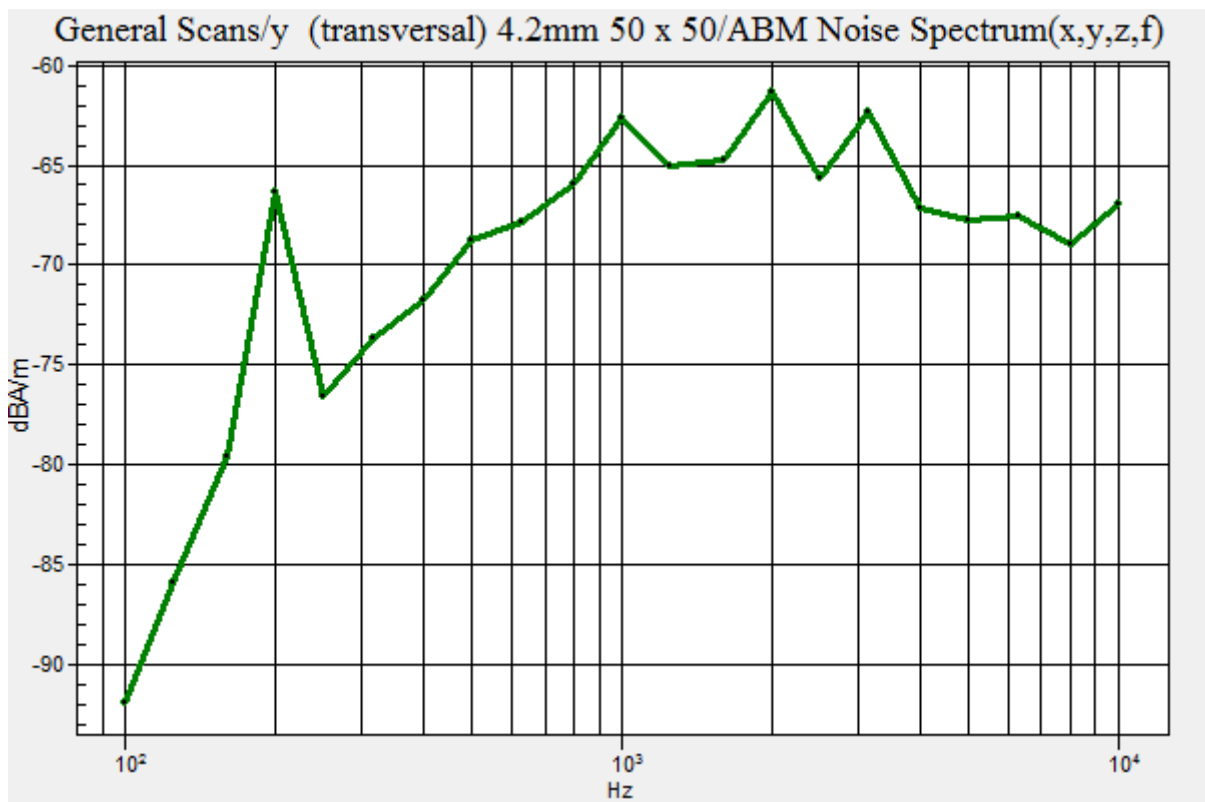

Plot No.173

NR Band 71 CP-OFDM 16QAM 5MHz 1RB 104offset 136100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.11 dBA/m
Location: 16.7, 0, 3.7 mm

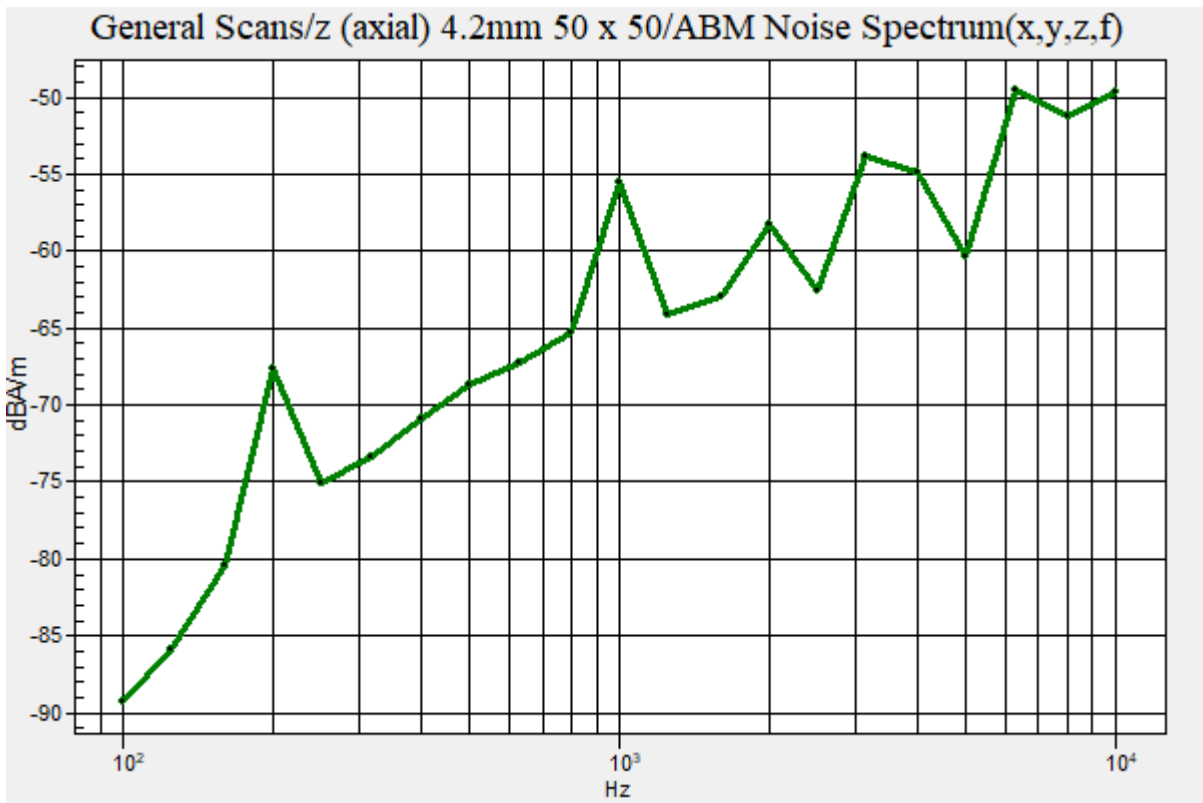

Plot No.174

NR Band 71 CP-OFDM 16QAM 5MHz 1RB 104offset 136100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.84 dBA/m

Location: 12.5, 8.3, 3.7 mm

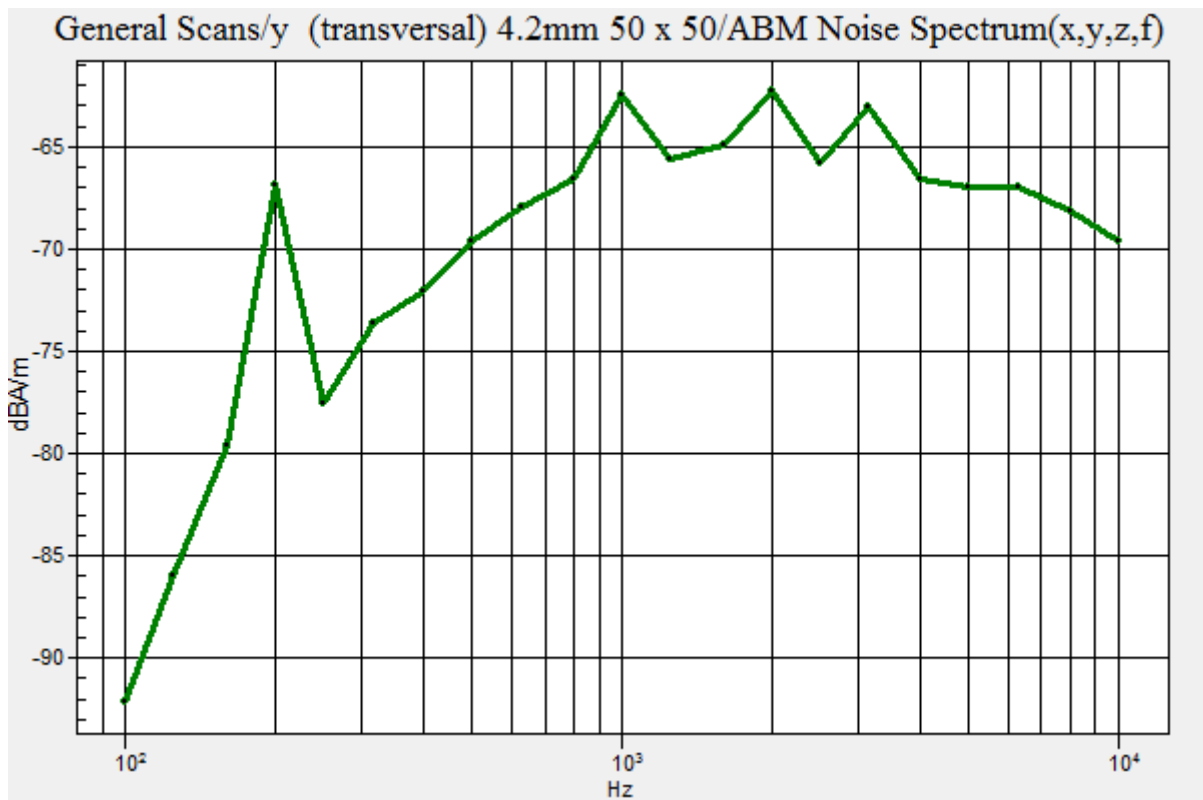

Plot No.175

NR Band 71 CP-OFDM 16QAM 10MHz 1RB 104offset 136100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -42.60 dBA/m
 Location: 16.7, 0, 3.7 mm

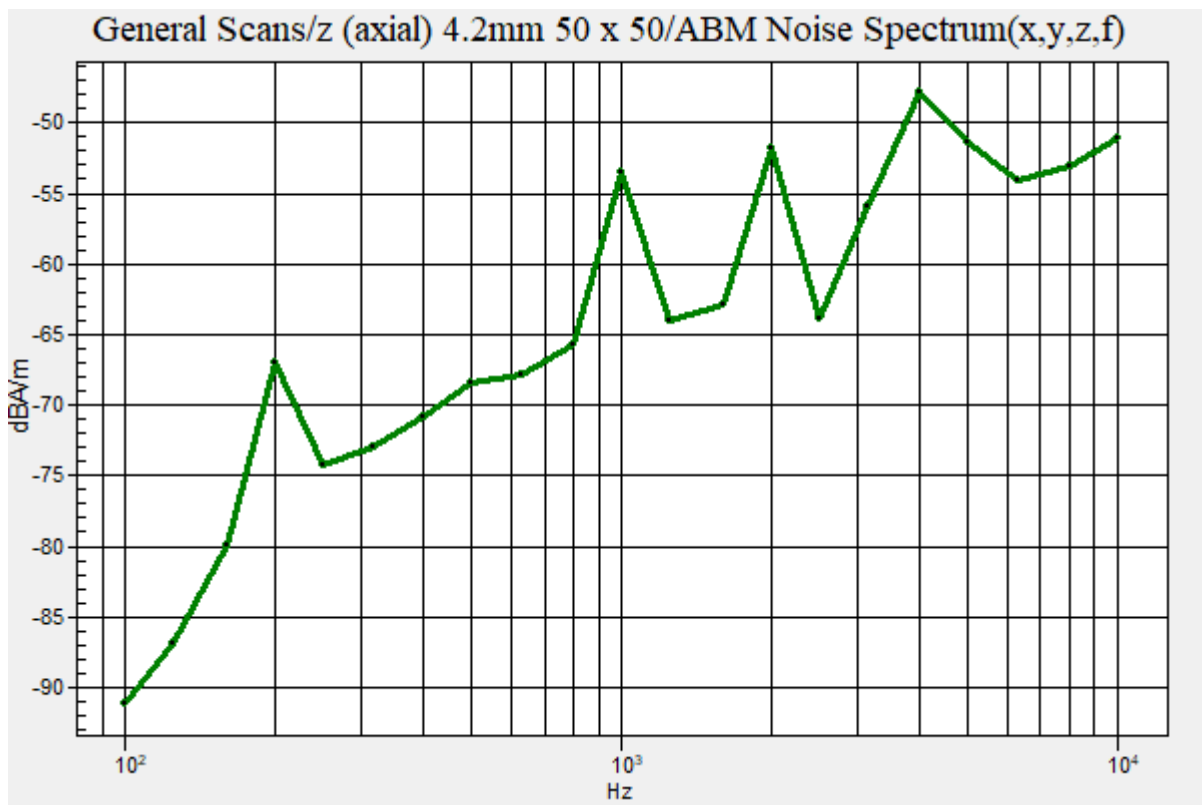

Plot No.176

NR Band 71 CP-OFDM 16QAM 10MHz 1RB 104offset 136100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.56 dBA/m

Location: 12.5, 8.3, 3.7 mm

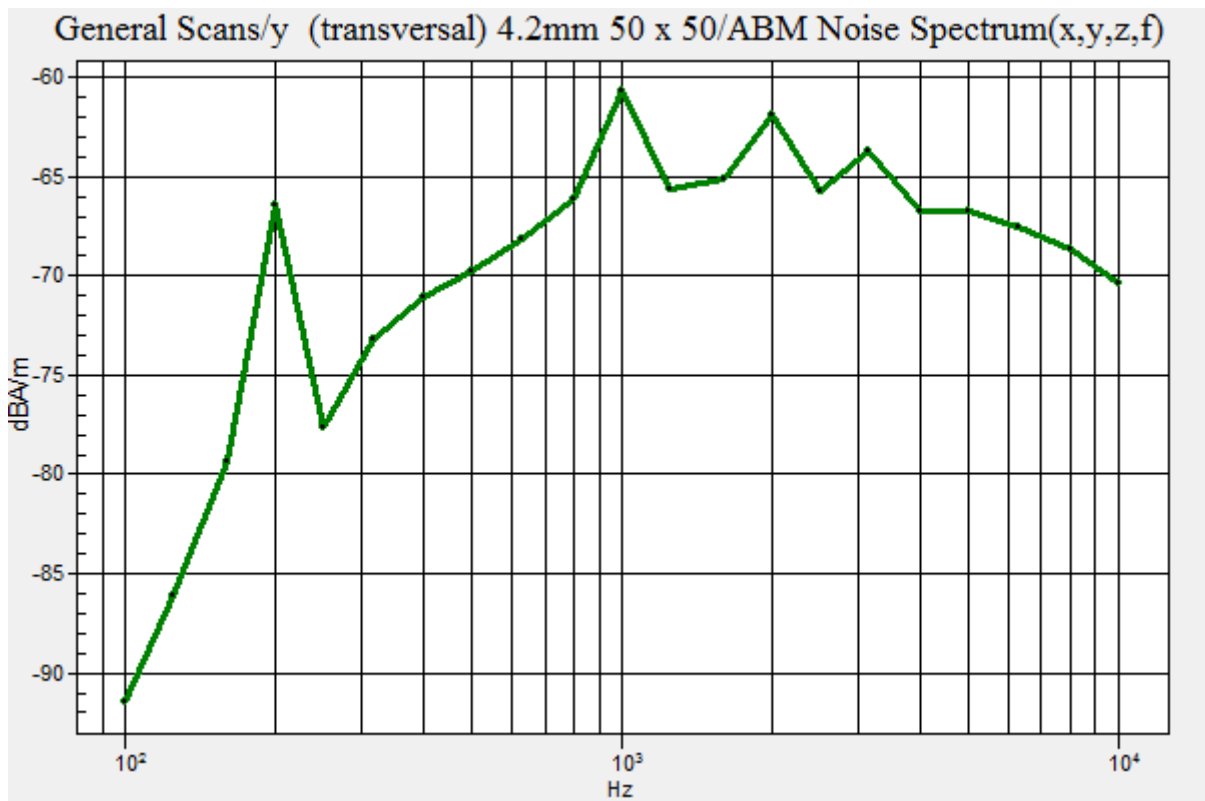

Plot No.177

NR Band 71 CP-OFDM 16QAM 15MHz 1RB 104offset 136100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.21 dBA/m
Location: 16.7, 0, 3.7 mm

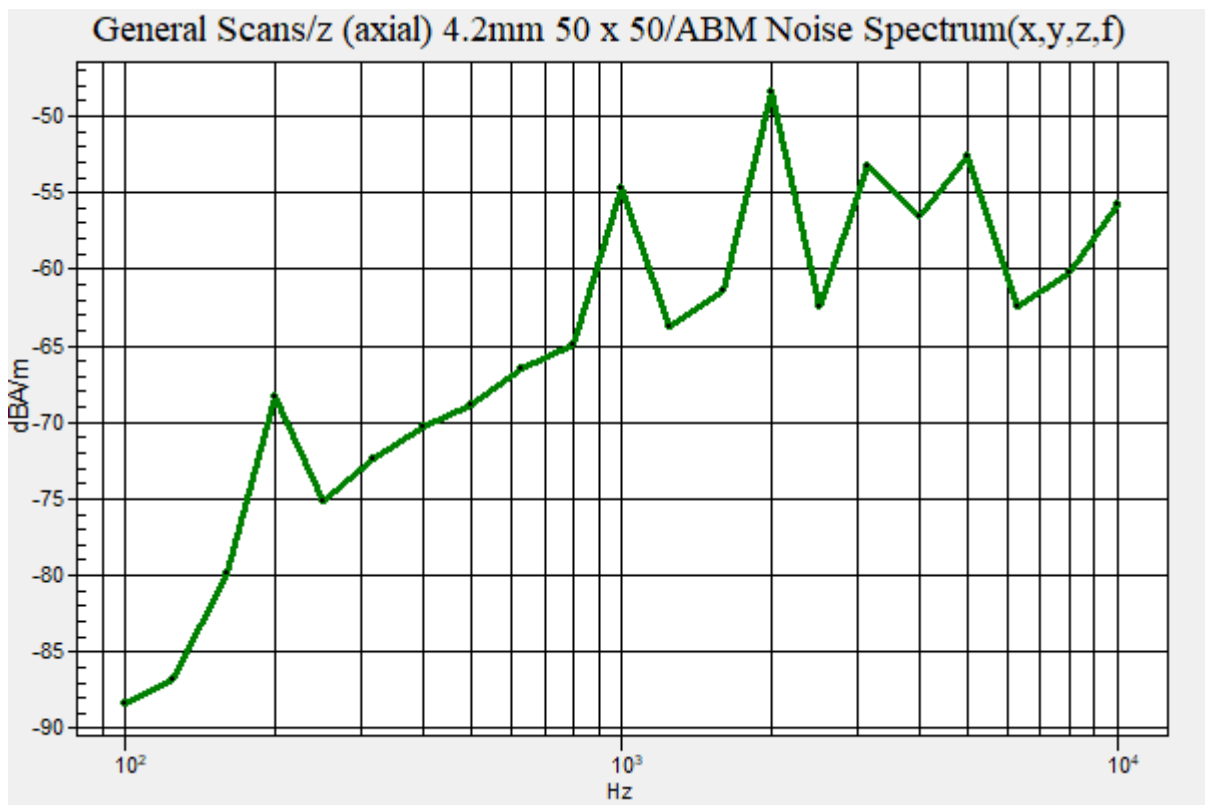

Plot No.178

NR Band 71 CP-OFDM 16QAM 15MHz 1RB 104offset 136100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -50.39 dBA/m
 Location: 12.5, 8.3, 3.7 mm

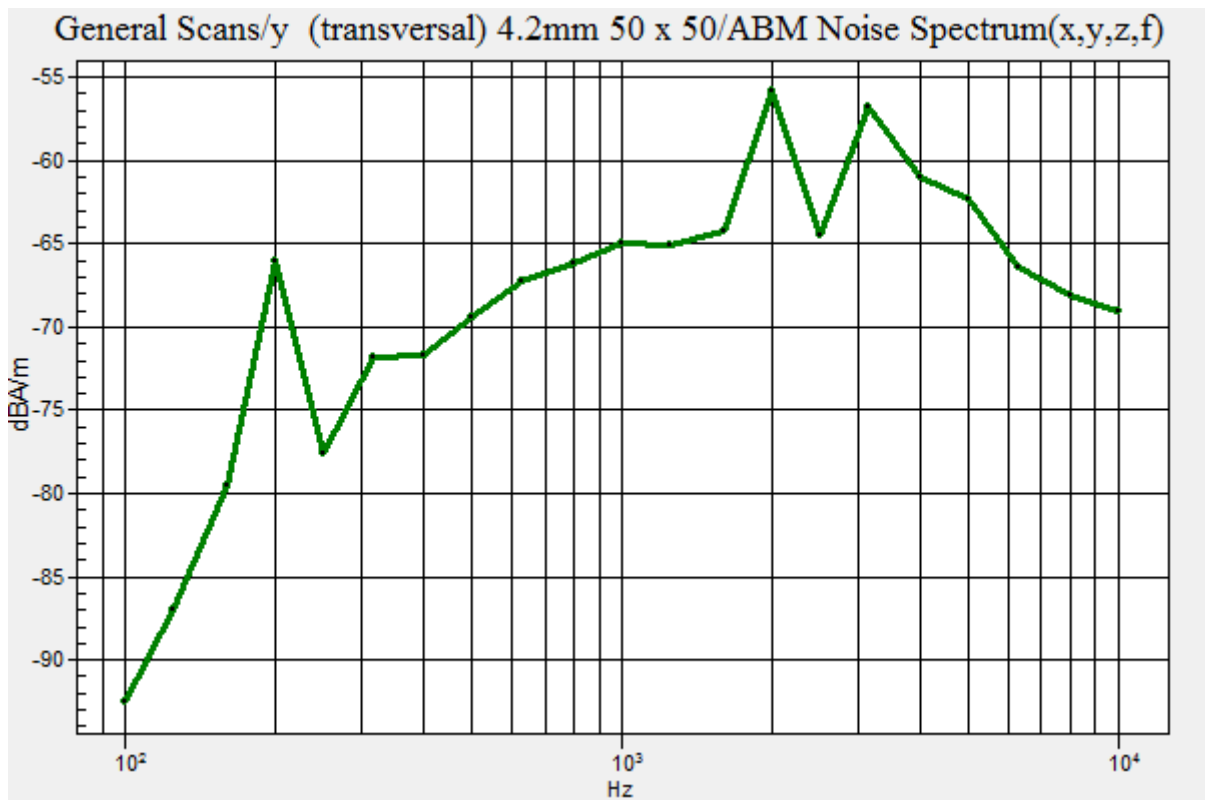

Plot No.179

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 134600ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 673 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -52.49 dBA/m
Location: 16.7, 0, 3.7 mm

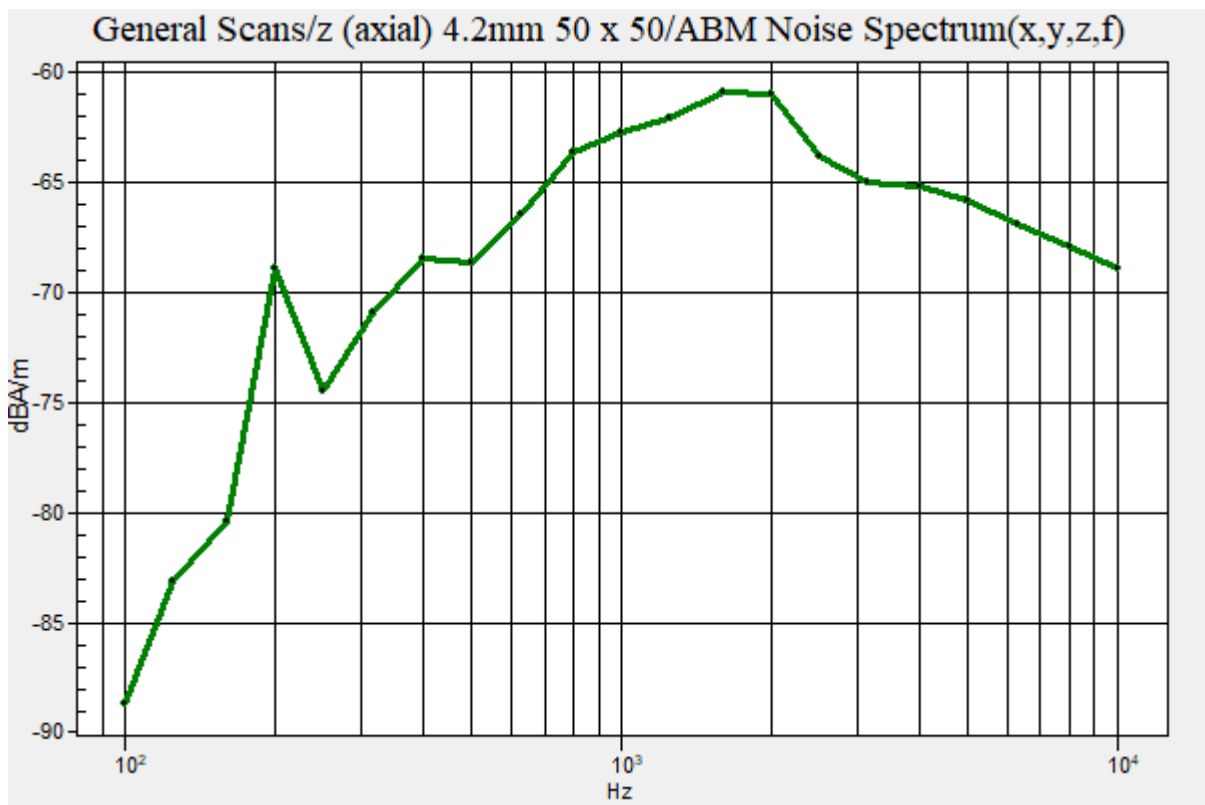

Plot No.180

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 134600ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 673 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -54.37 dBA/m

Location: 12.5, 8.3, 3.7 mm

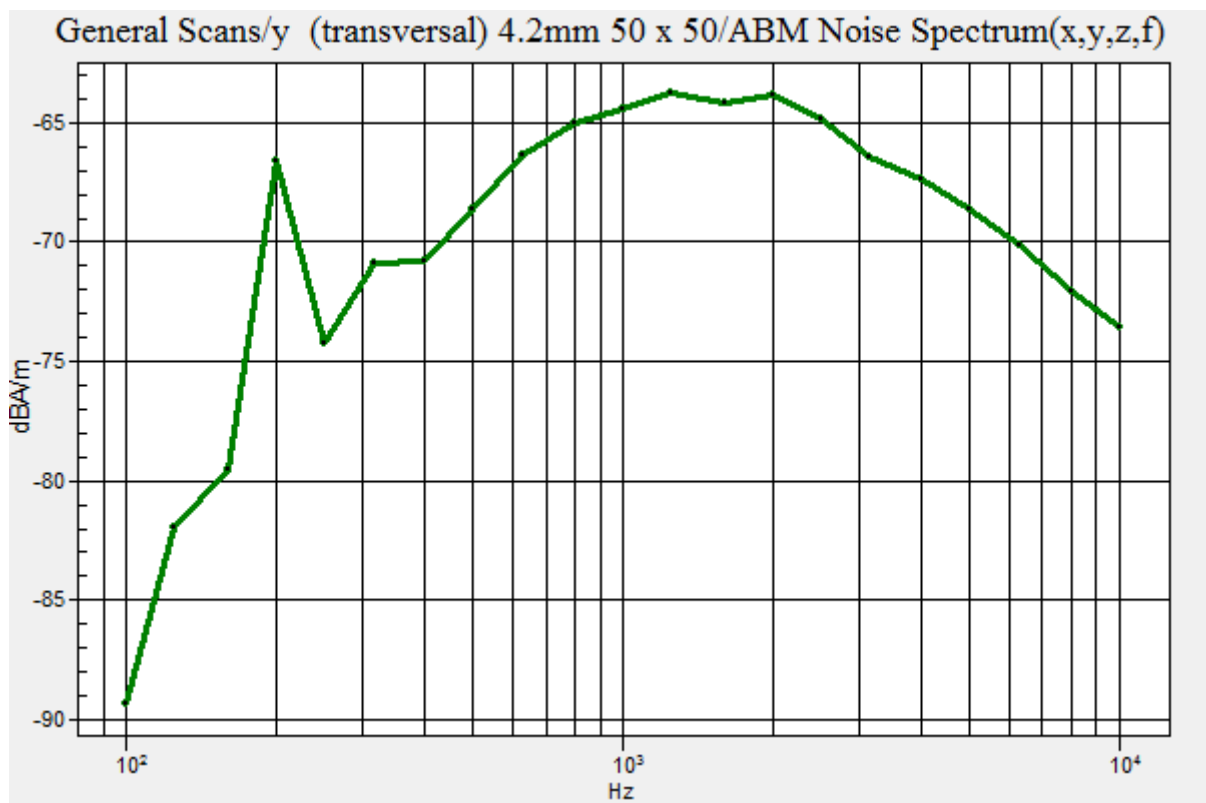

Plot No.181

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 136100ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -40.10 dBA/m
 Location: 16.7, 0, 3.7 mm

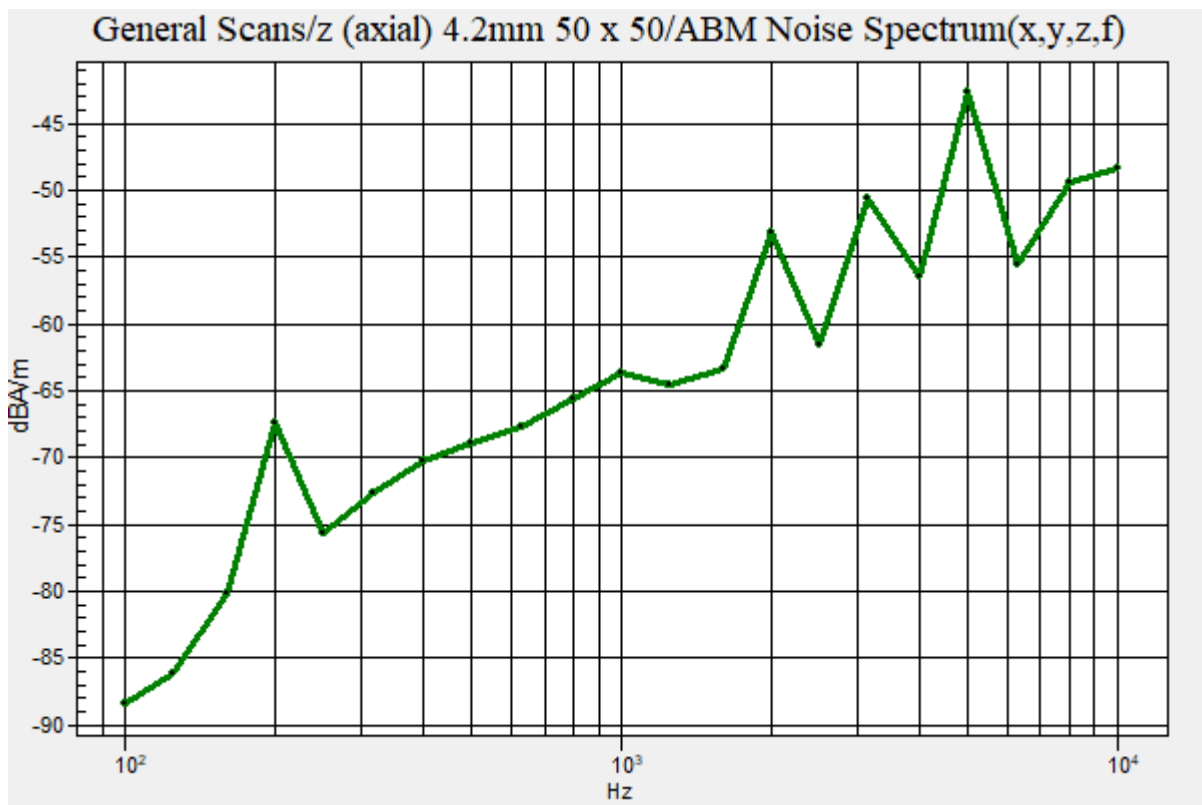

Plot No.182

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 136100ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 680.5 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY5 Configuration:


- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -53.50 dBA/m
Location: 12.5, 8.3, 3.7 mm

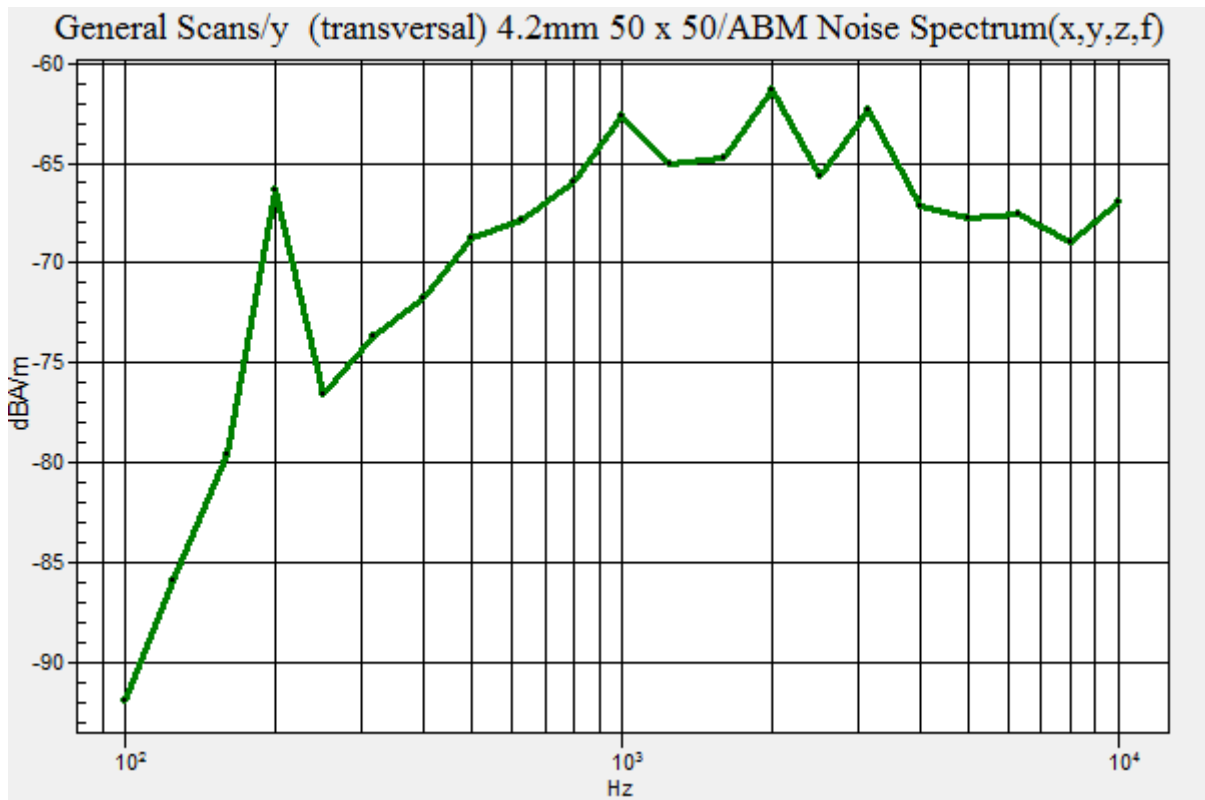

Plot No.183

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 137600ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 688 MHz;Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -52.41 dBA/m
Location: 16.7, 0, 3.7 mm

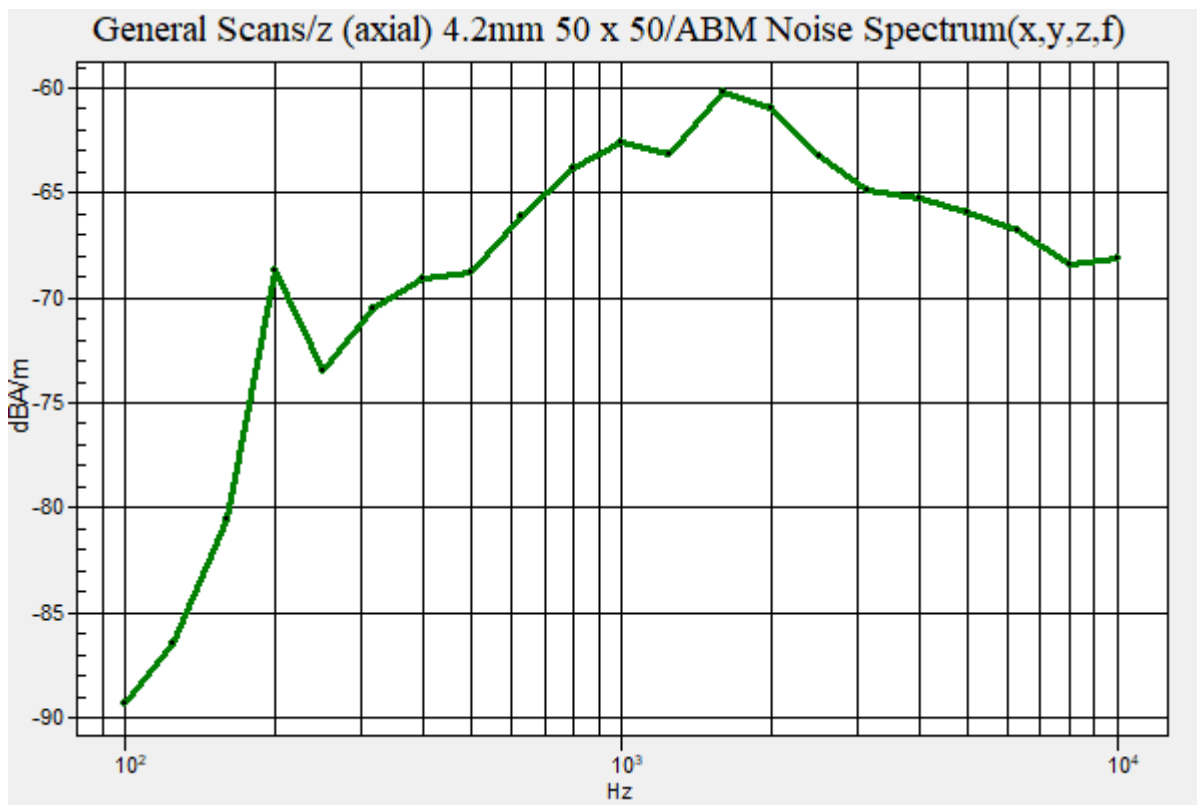

Plot No.184

NR Band 71 CP-OFDM 16QAM 20MHz 1RB 104offset 137600ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, NR Band 71 (0); Frequency: 688 MHz;Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY5 Configuration:

- Probe: AM1DV3 - 3050;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4)

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -54.31 dBA/m
 Location: 12.5, 8.3, 3.7 mm

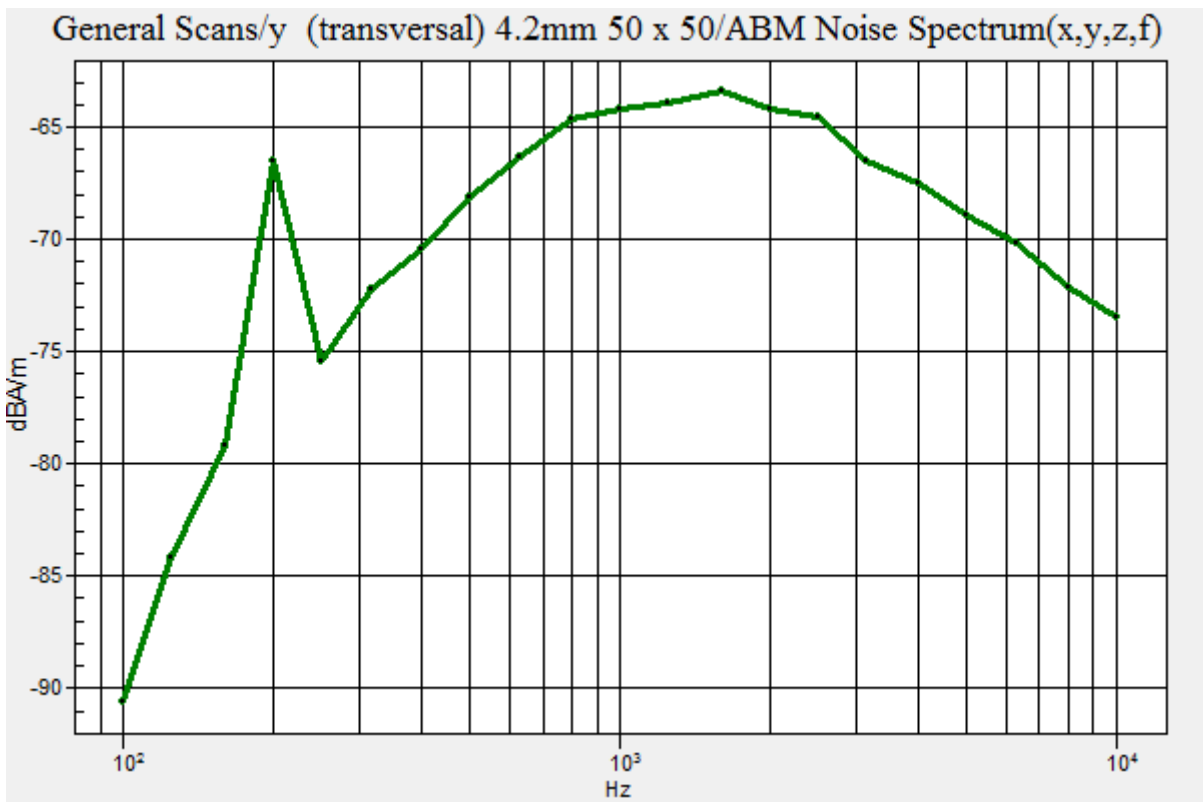

Plot No.185

NR Band 41 CP-OFDM 16QAM 20MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -52.71 dBA/m
Location: 16.7, 0, 3.7 mm

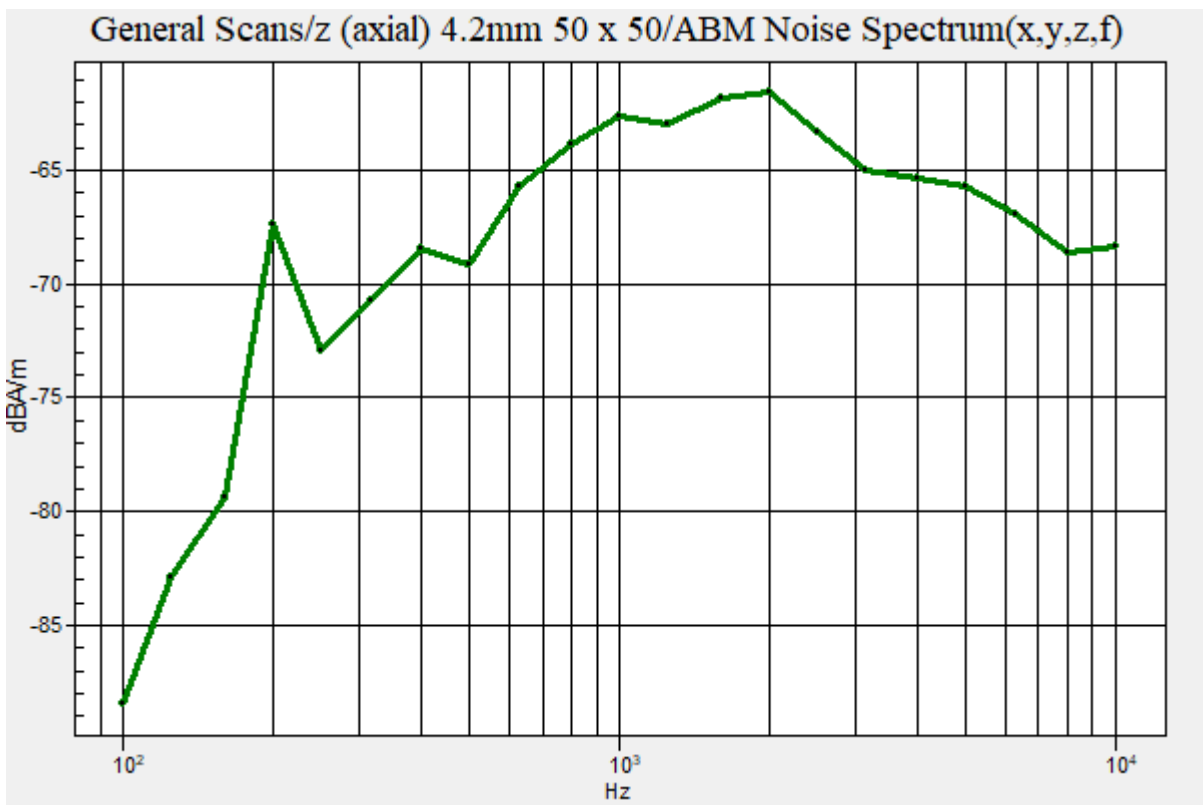

Plot No.186

NR Band 41 CP-OFDM 16QAM 20MHz 1RB 104offset 518598ch y(trnasversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -54.74 dBA/m

Location: 12.5, 4.2, 3.7 mm

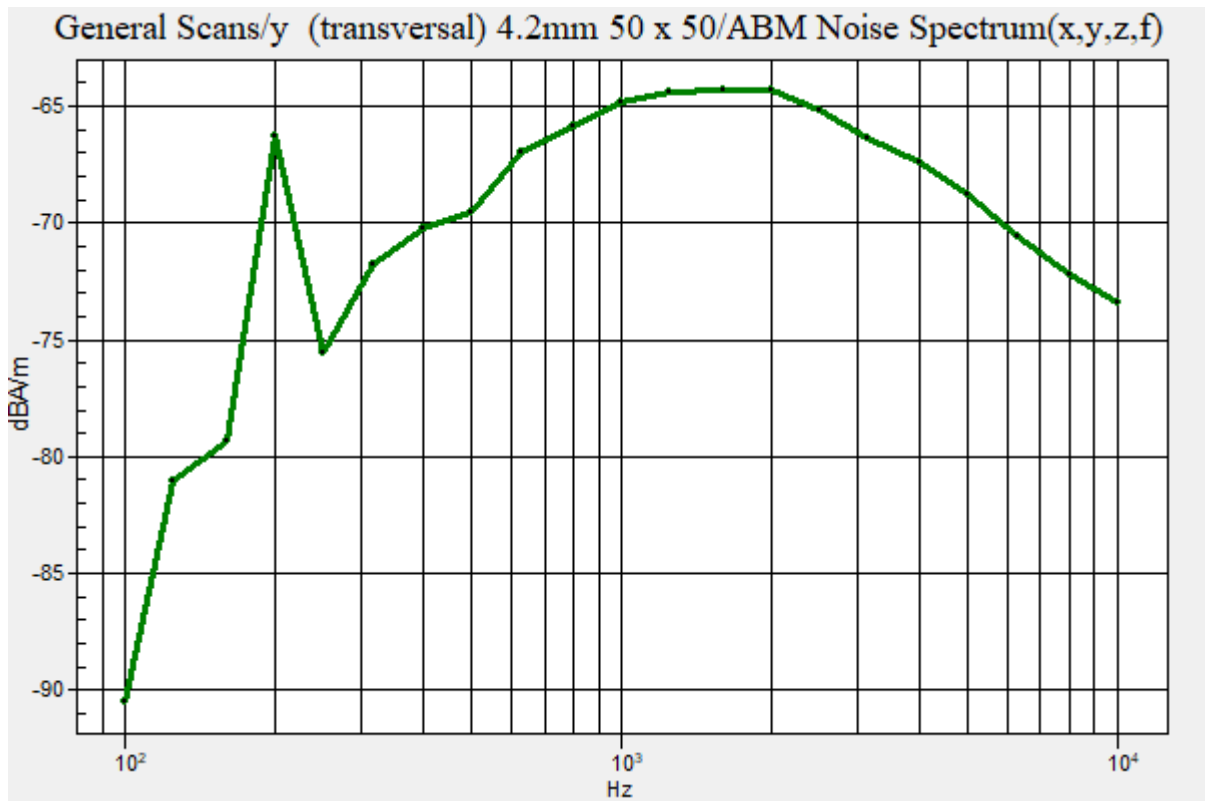

Plot No.187

NR Band 41 CP-OFDM 16QAM 40MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.71 dBA/m
 Location: 16.7, 0, 3.7 mm

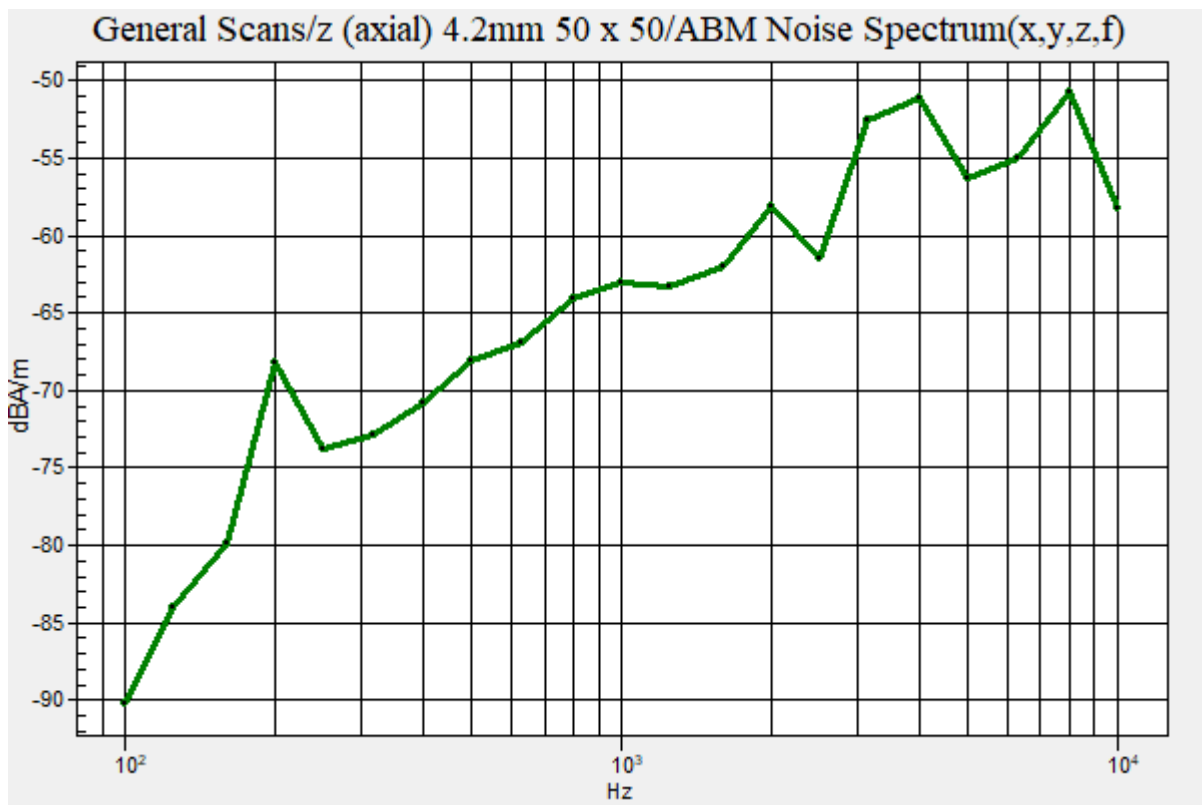

Plot No.188

NR Band 41 CP-OFDM 16QAM 40MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:


- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1):

Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -52.84 dBA/m
Location: 12.5, 4.2, 3.7 mm

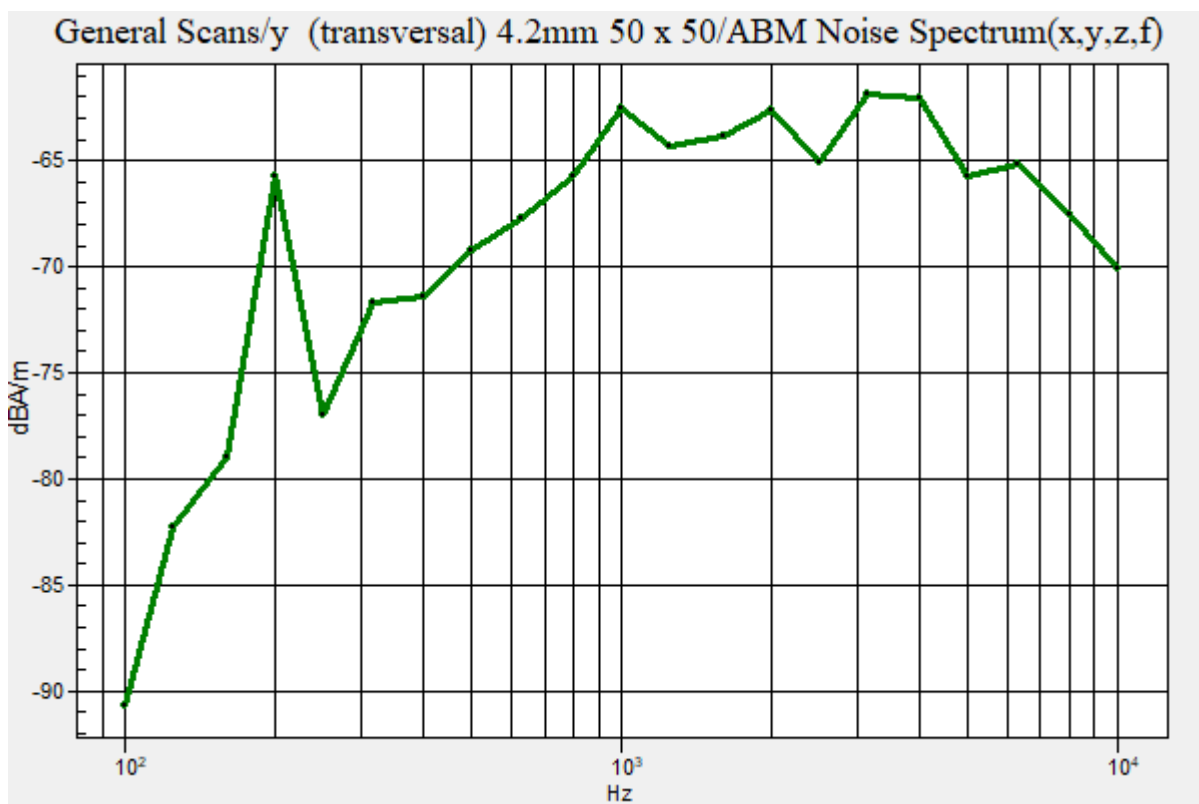

Plot No.189

NR Band 41 CP-OFDM 16QAM 50MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -37.42 dBA/m

Location: 16.7, 0, 3.7 mm

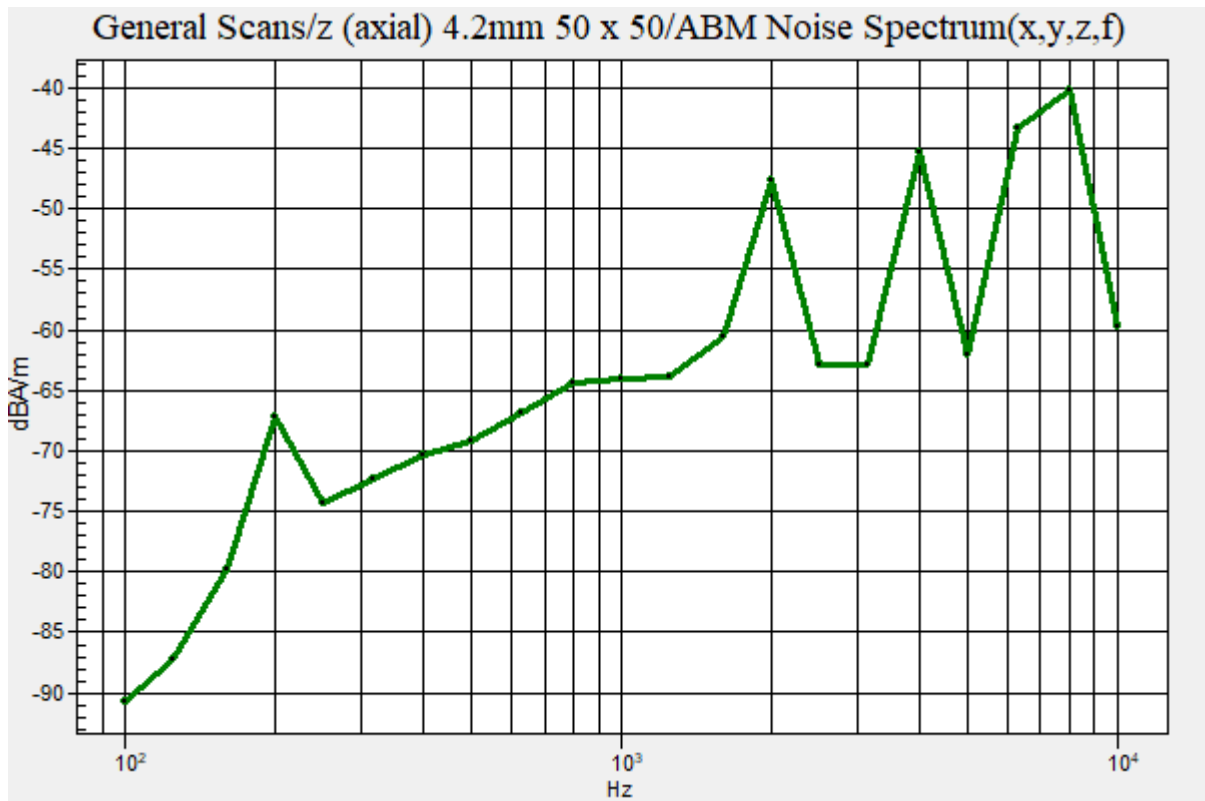

Plot No.190

NR Band 41 CP-OFDM 16QAM 50MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -50.17 dBA/m

Location: 12.5, 4.2, 3.7 mm

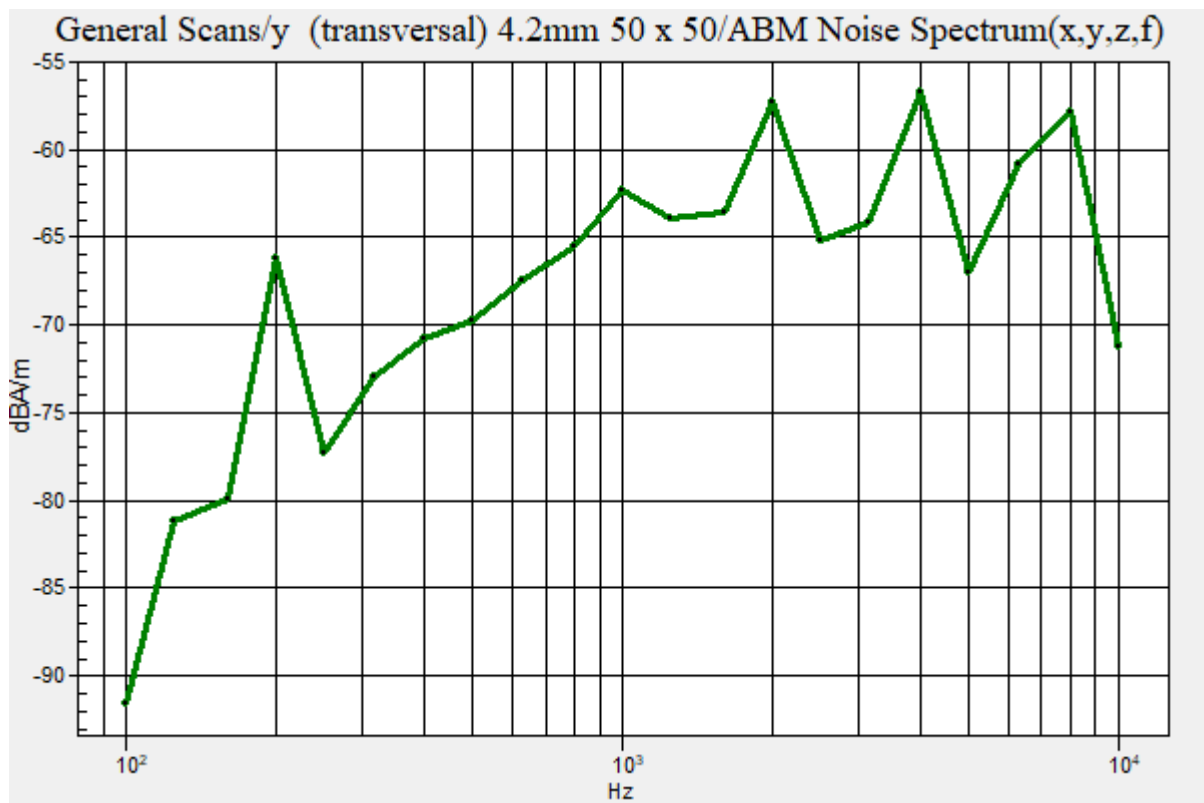

Plot No.191

NR Band 41 CP-OFDM 16QAM 60MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -37.67 dBA/m
 Location: 16.7, 0, 3.7 mm

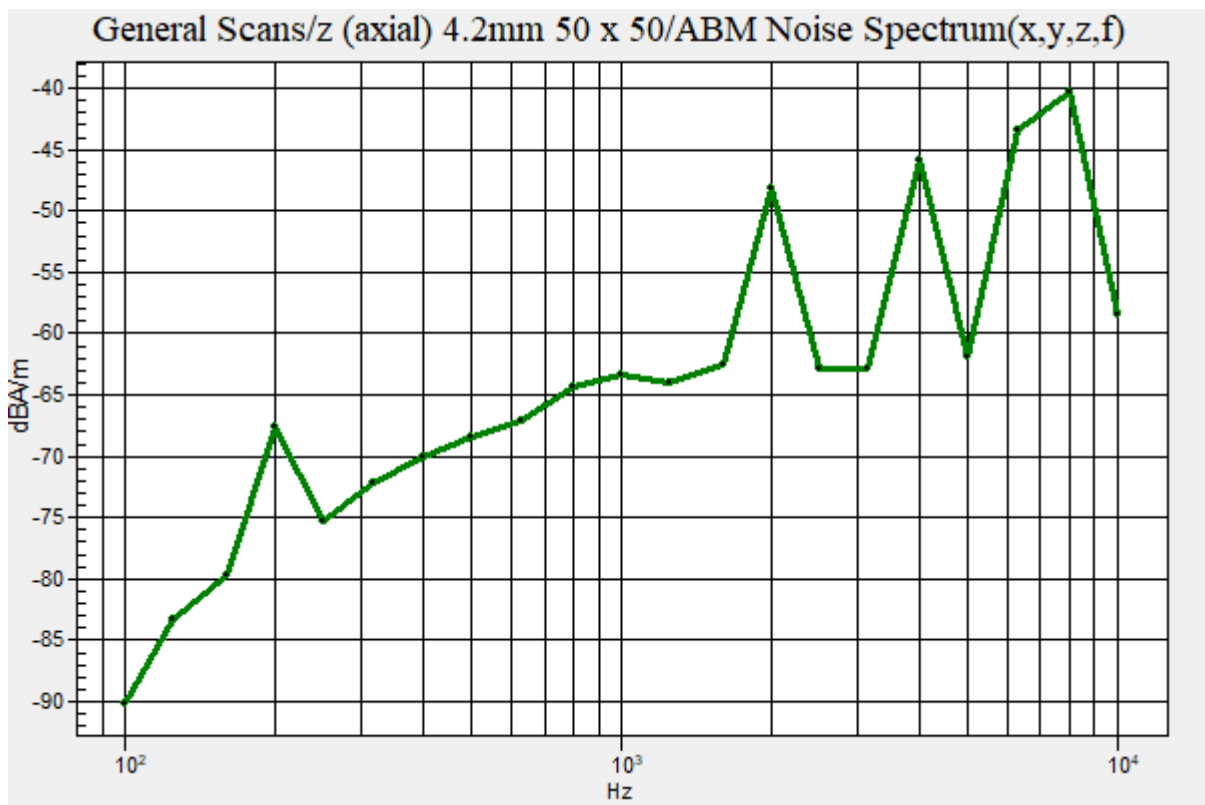

Plot No.192

NR Band 41 CP-OFDM 16QAM 60MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -50.15 dBA/m

Location: 12.5, 4.2, 3.7 mm

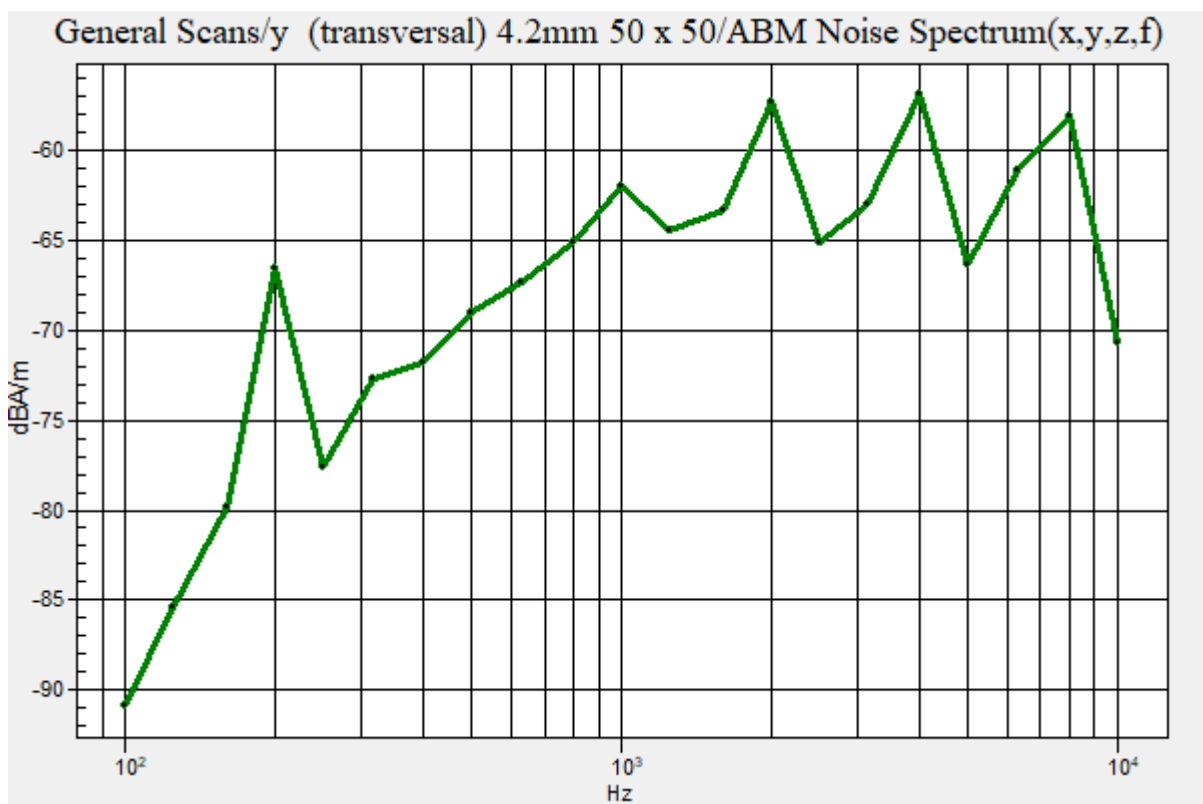

Plot No.193

NR Band 41 CP-OFDM 16QAM 80MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -36.51 dBA/m

Location: 16.7, 0, 3.7 mm

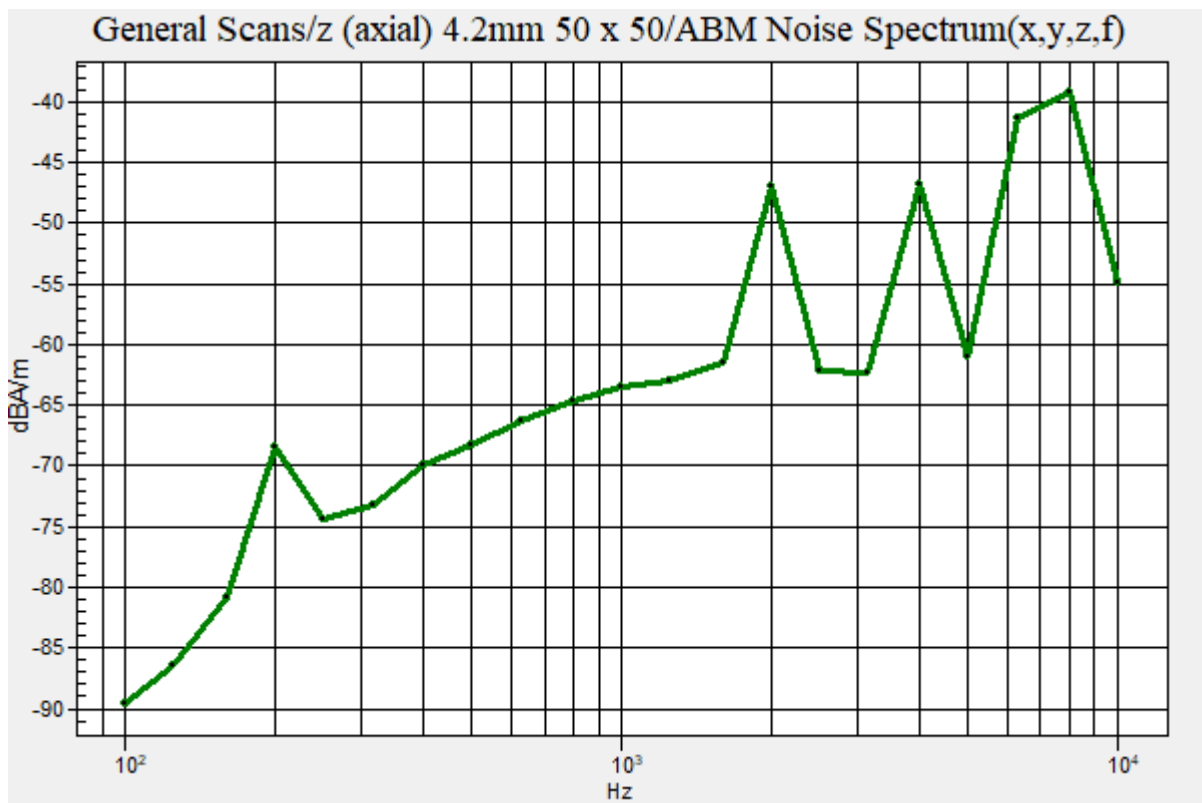

Plot No.194

NR Band 41 CP-OFDM 16QAM 80MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -50.55 dBA/m
 Location: 12.5, 4.2, 3.7 mm

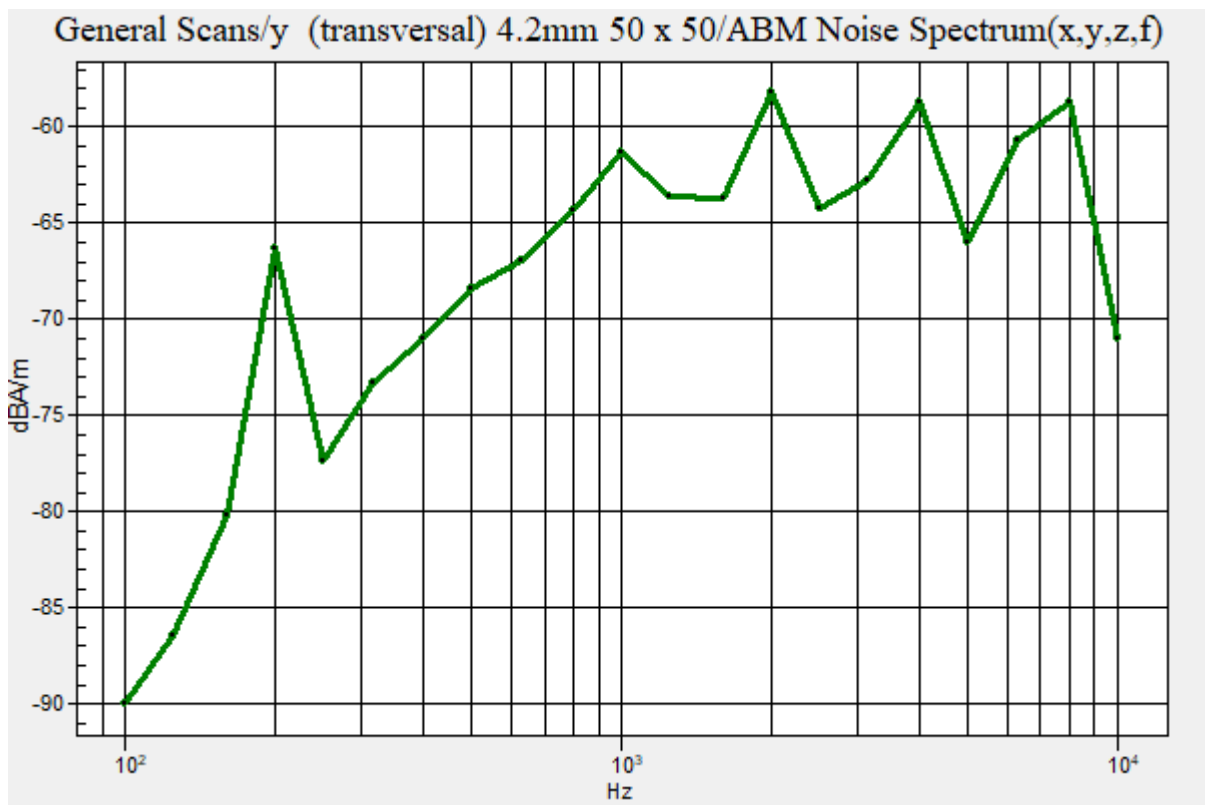

Plot No.195

NR Band 41 CP-OFDM 16QAM 90MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -40.63 dBA/m
Location: 16.7, 0, 3.7 mm

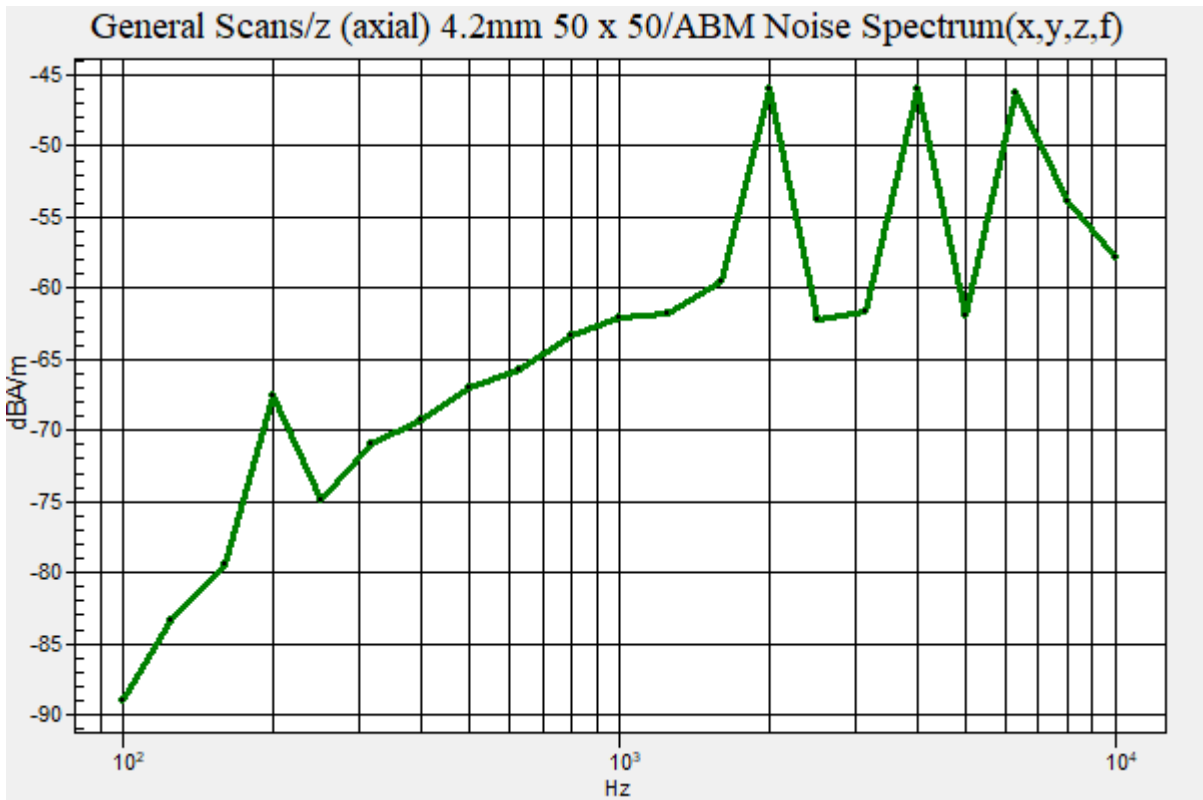

Plot No.196

NR Band 41 CP-OFDM 16QAM 90MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -45.26 dBA/m
Location: 12.5, 4.2, 3.7 mm

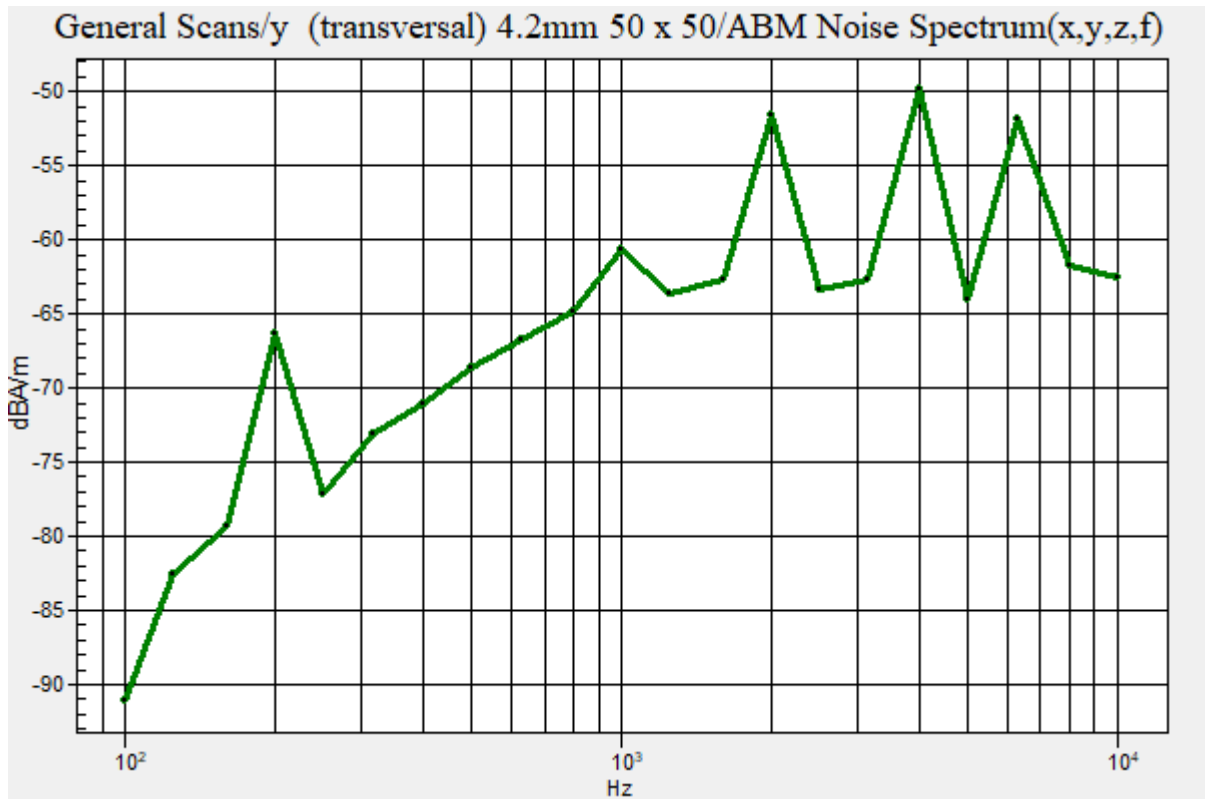

Plot No.197

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 518598ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -35.93 dBA/m
 Location: 16.7, 0, 3.7 mm

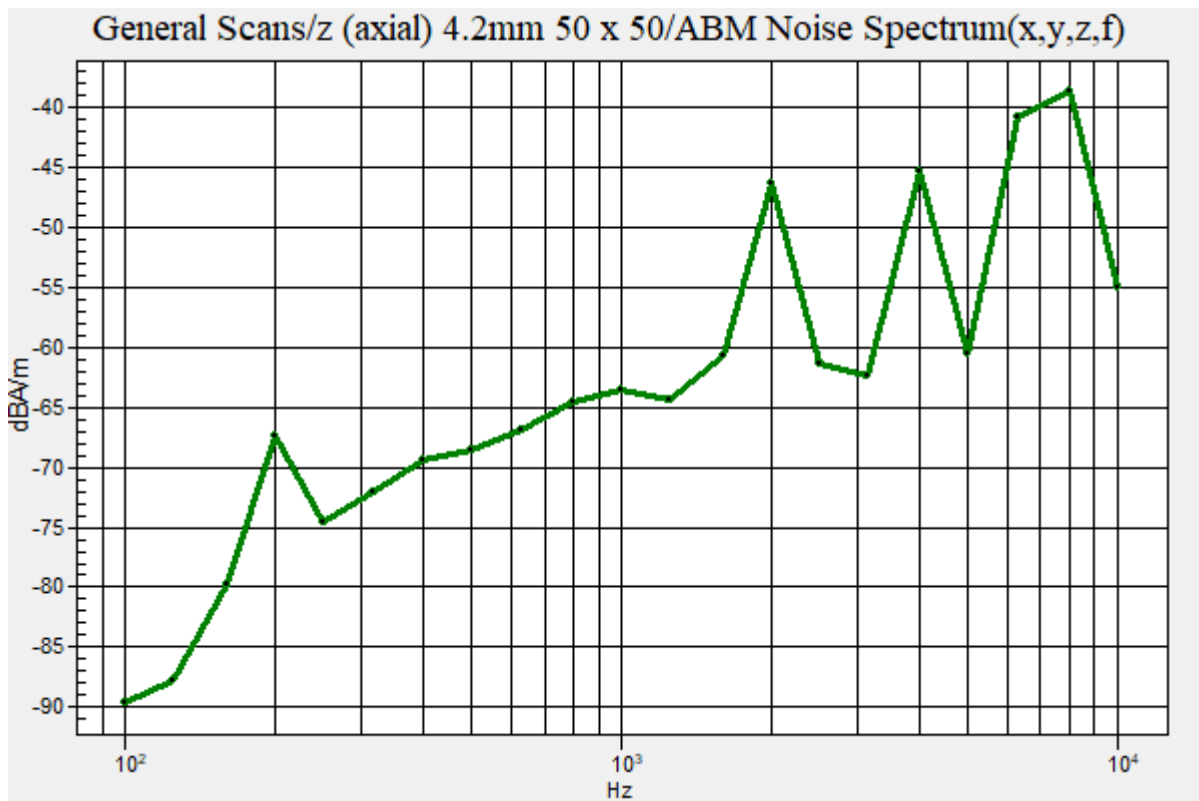

Plot No.198

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 518598ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2592.99 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -50.70 dBA/m
Location: 12.5, 4.2, 3.7 mm

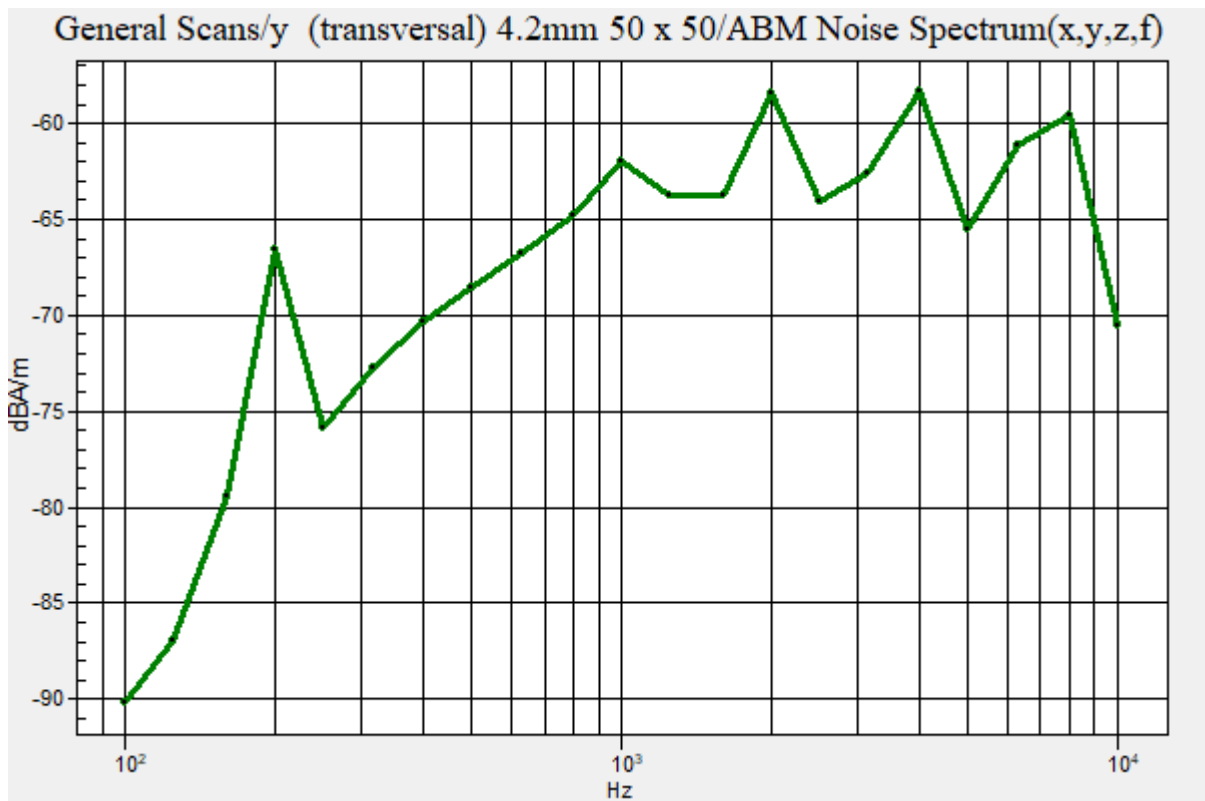

Plot No.199

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 509202ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2546.01 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.49 dBA/m
 Location: 16.7, 0, 3.7 mm

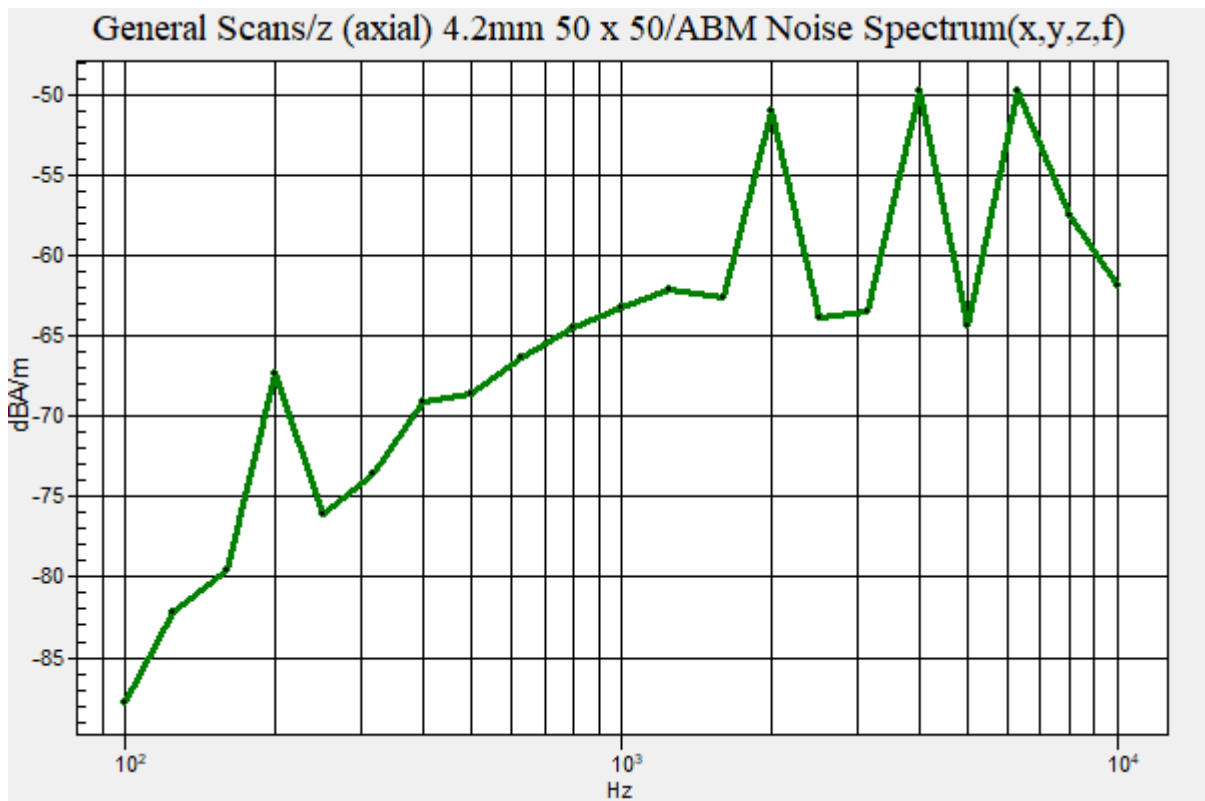

Plot No.200

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 509202ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2546.01 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -47.26 dBA/m
 Location: 12.5, 4.2, 3.7 mm

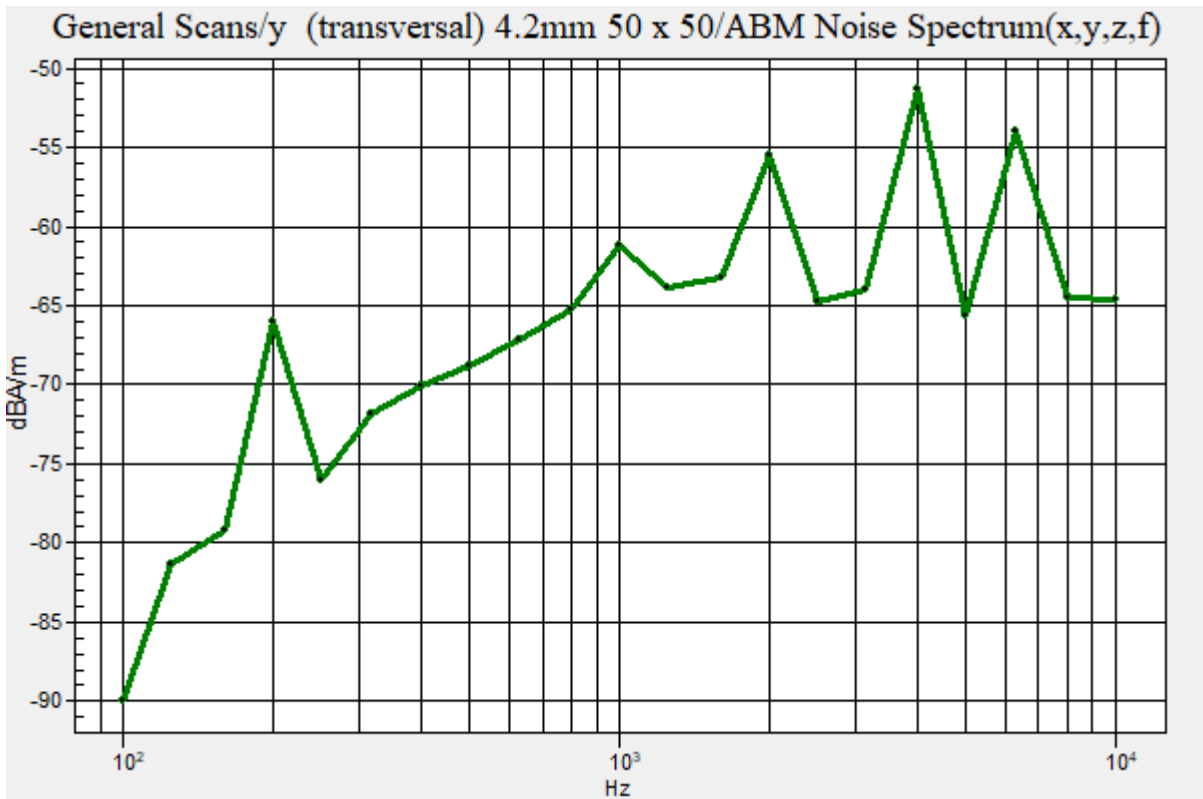

Plot No.201

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 513900ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2569.5 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -40.27 dBA/m

Location: 16.7, 0, 3.7 mm

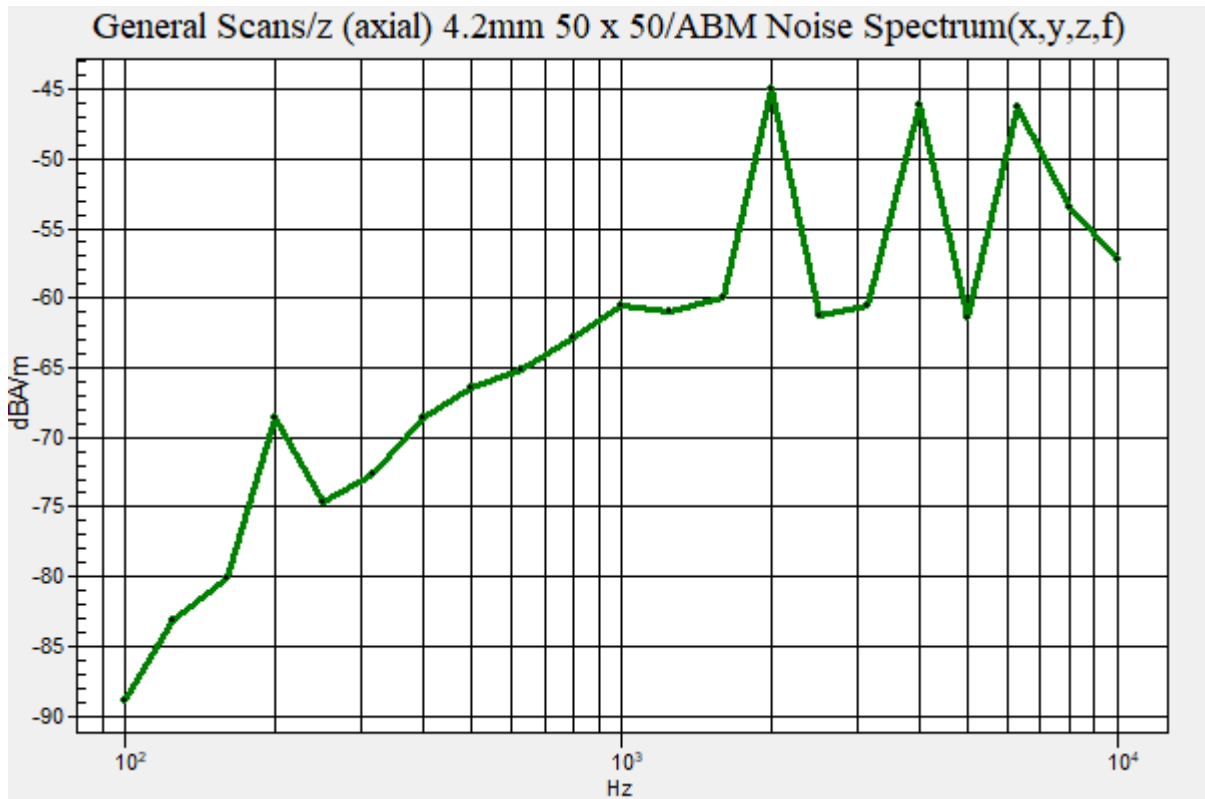

Plot No.202

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 513900ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2569.5 MHz;Duty Cycle: 1:4.00037

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -46.20 dBA/m

Location: 12.5, 4.2, 3.7 mm

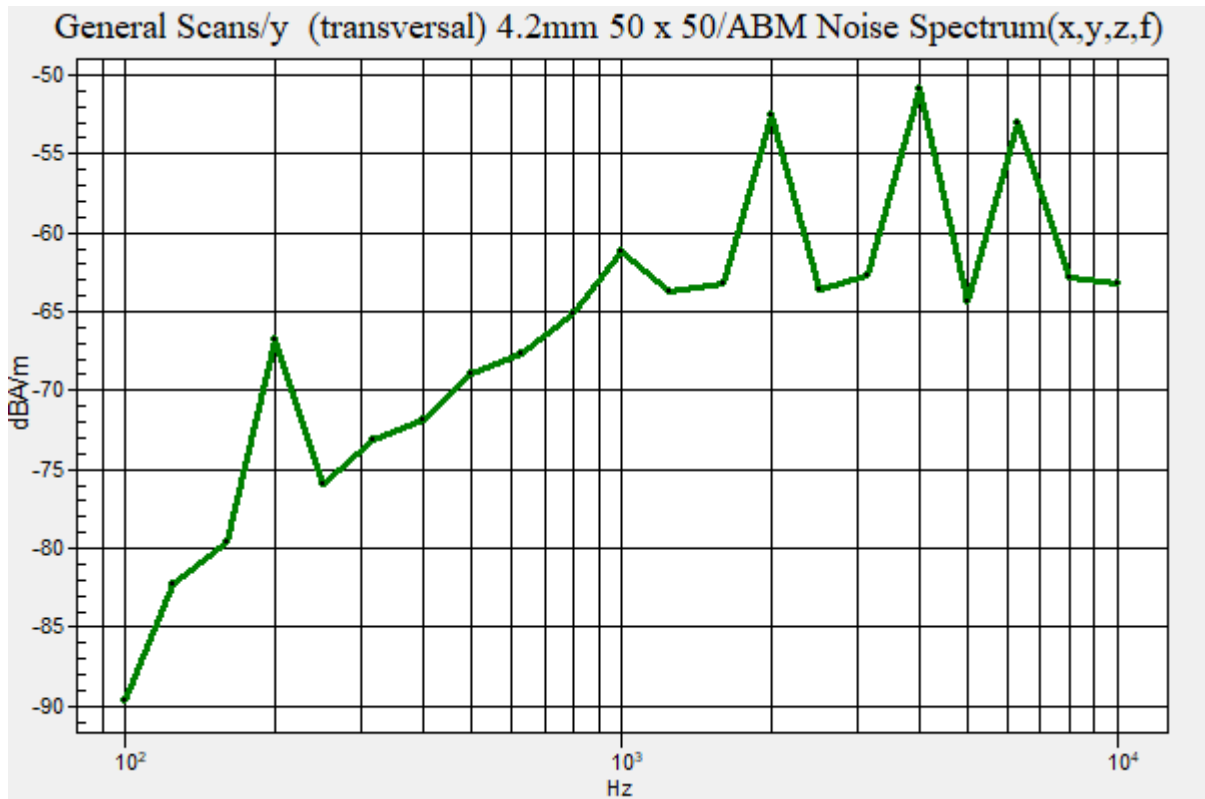

Plot No.203

NR Band 71 CP-OFDM 16QAM 100MHz 1RB 104offset 523302ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2616.51 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -39.91 dBA/m
Location: 16.7, 0, 3.7 mm

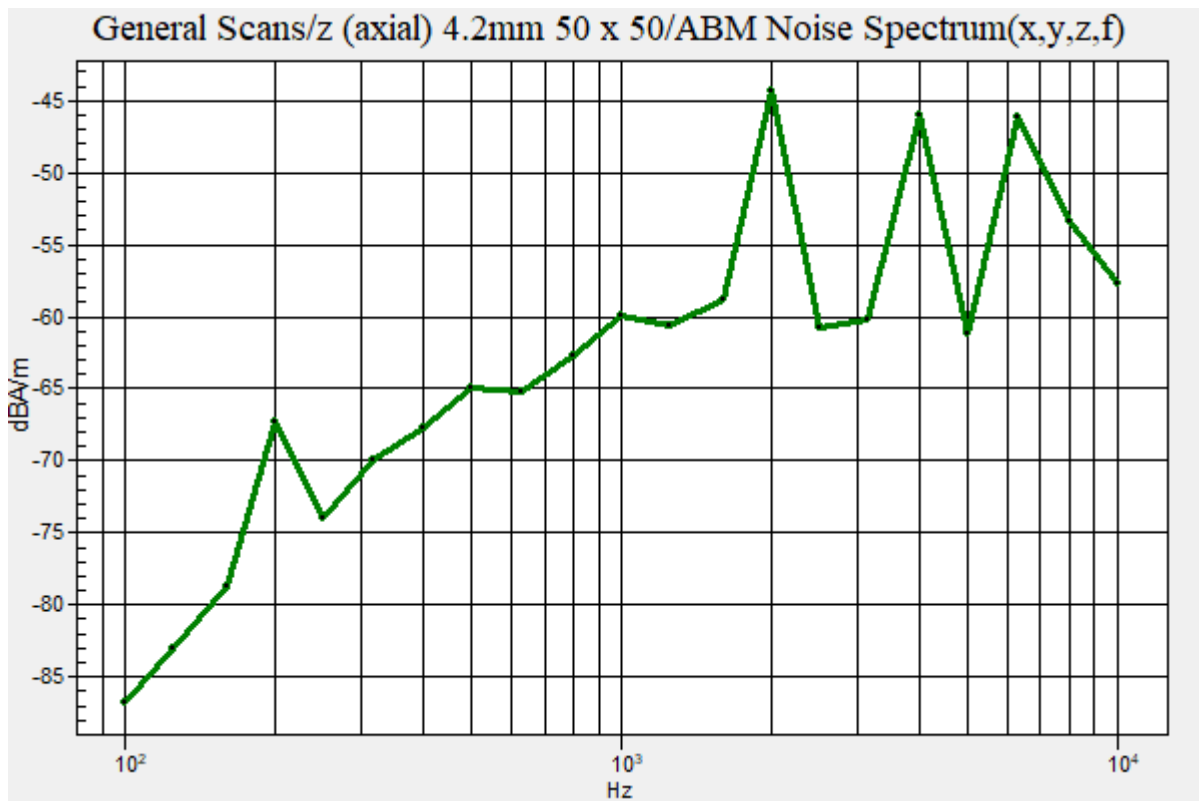

Plot No.204

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 523302ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2616.51 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section

DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50

x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm

Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav

Output Gain: 20.21

Measure Window Start: 300ms


Measure Window Length: 1000ms

Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.54 dBA/m

Location: 12.5, 4.2, 3.7 mm

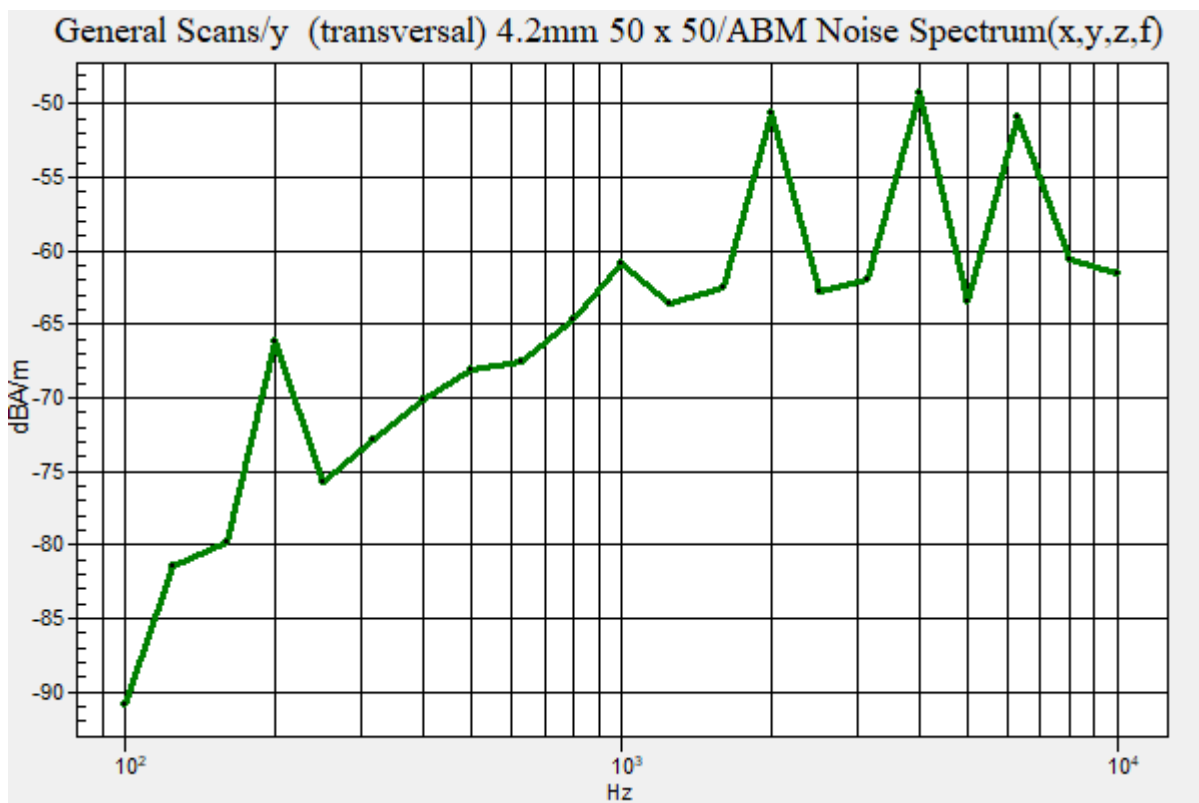

Plot No.205

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 528000ch z(axial)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2640 MHz;Duty Cycle: 1:4.00037
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/z (axial) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
Output Gain: 20.21
Measure Window Start: 300ms
Measure Window Length: 1000ms
Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -39.27 dBA/m
Location: 16.7, 0, 3.7 mm

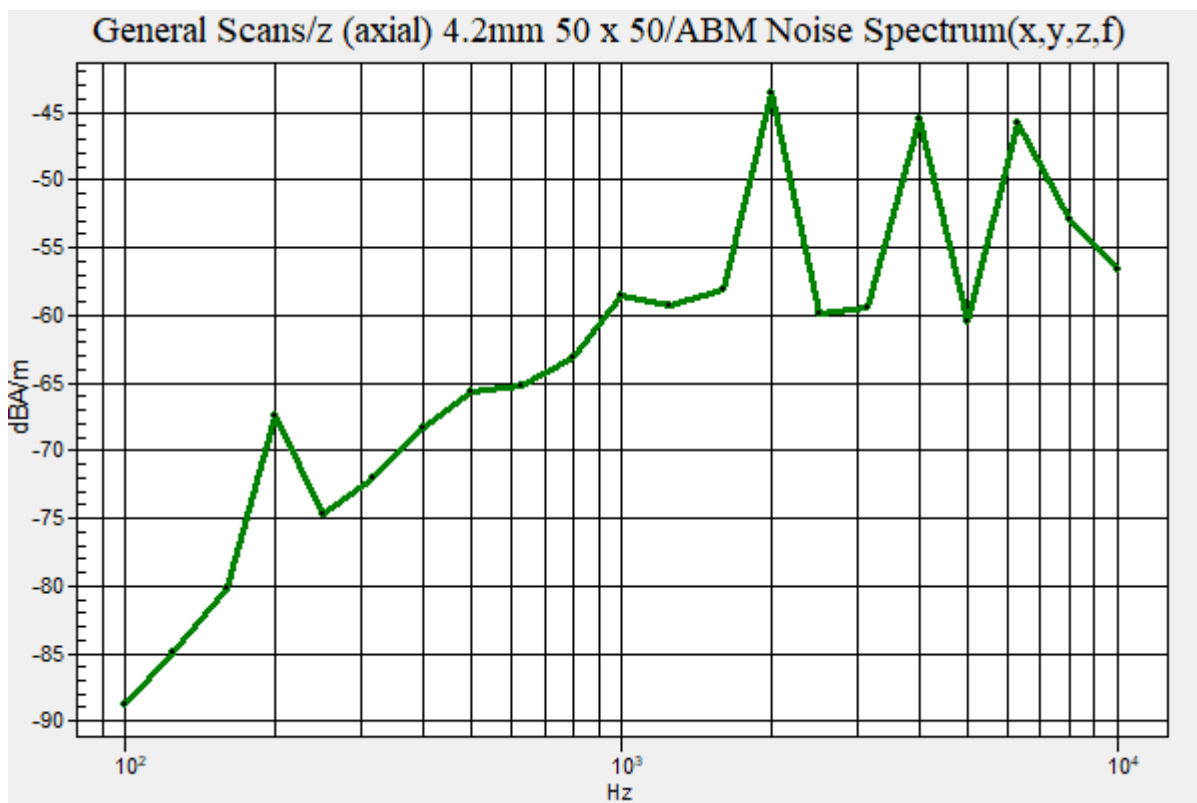

Plot No.206

NR Band 41 CP-OFDM 16QAM 100MHz 1RB 104offset 528000ch y(transversal)

DUT: SM-G781V; Type: Bar

Communication System: UID 0, n41 (0); Frequency: 2640 MHz;Duty Cycle: 1:4.00037
 Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
 Phantom section: TCoil Section


DASY Configuration:

- Probe: AM1DV3 - 3050; ;
- Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn504; Calibrated: 2020-02-26
- Phantom: HAC Test Arch with AMCC
- Measurement SW: DASY52, Version 52.10 (4);

T-Coil scan (scan for ANSI C63.19-2007 & 2011 compliance)/General Scans/y (transversal) 4.2mm 50 x 50/ABM Noise Spectrum(x,y,z,f) (13x13x1): Measurement grid: dx=10mm, dy=10mm
 Signal Type: Audio File (.wav) 48k_voice_1kHz_1s.wav
 Output Gain: 20.21
 Measure Window Start: 300ms
 Measure Window Length: 1000ms
 Device Reference Point: 0, 0, -6.3 mm

Cursor:

ABM = -44.35 dBA/m
 Location: 12.5, 4.2, 3.7 mm

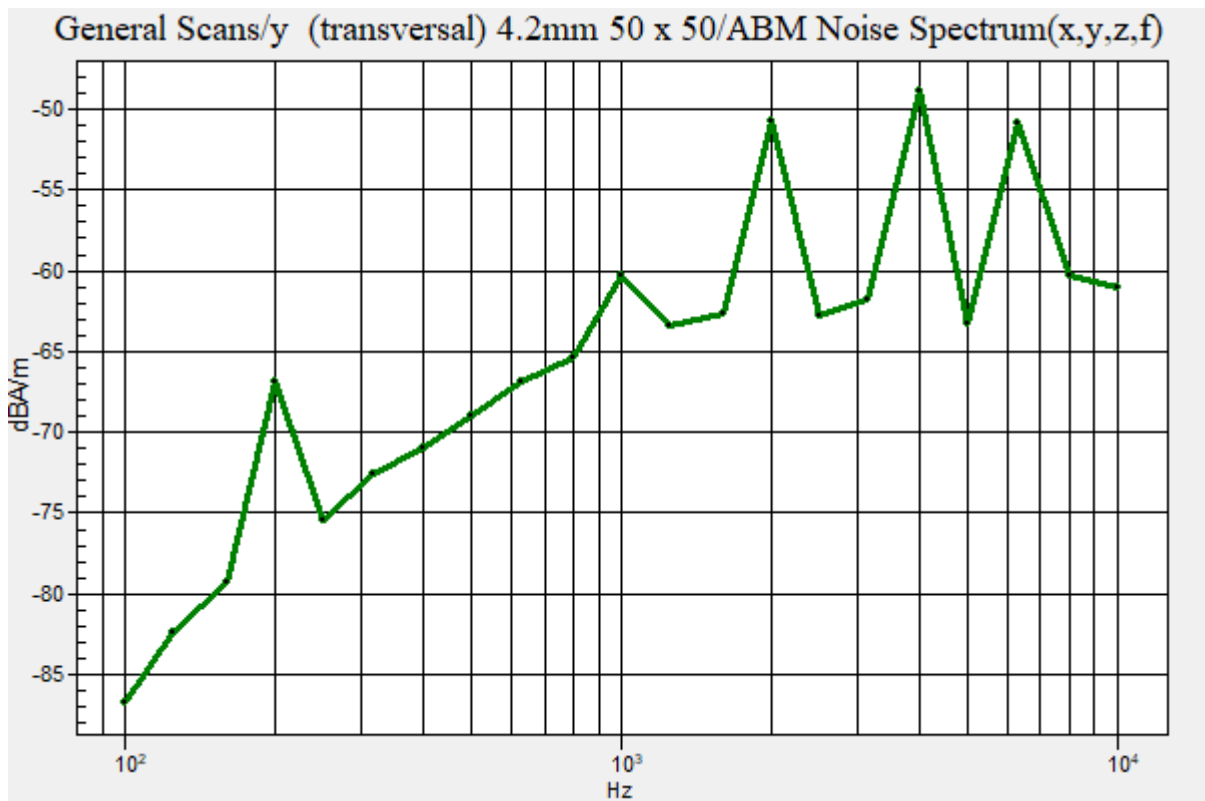

Attachment 2. HAC T-Coil Probe Certificates

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **HCT (Dymstec)**

Certificate No: **AM1DV3-3050_Nov19**

| CALIBRATION CERTIFICATE | | | | | | | | | | | | |
|---|--|--|---------------------------------|--------|---------------------------|---------------------------|-------|----------|----------|----|--------------|--------------|
| Object | AM1DV3 - SN: 3050 | | | | | | | | | | | |
| Calibration procedure(s) | QA CAL-24.v4 Calibration procedure for AM1D magnetic field probes and TMFS in the audio range | | | | | | | | | | | |
| Calibration date: | November 20, 2019 | <table border="1"> <tr> <td>결 재</td> <td>담당자 <i>[Signature]</i></td> <td>확인자 <i>[Signature]</i></td> </tr> <tr> <td>직위/성명</td> <td>SN / 김민영</td> <td>GT / 김민중</td> </tr> <tr> <td>일자</td> <td>2019 / 11.19</td> <td>2019 / 11.19</td> </tr> </table> | | 결 재 | 담당자 <i>[Signature]</i> | 확인자 <i>[Signature]</i> | 직위/성명 | SN / 김민영 | GT / 김민중 | 일자 | 2019 / 11.19 | 2019 / 11.19 |
| 결 재 | 담당자 <i>[Signature]</i> | 확인자 <i>[Signature]</i> | | | | | | | | | | |
| 직위/성명 | SN / 김민영 | GT / 김민중 | | | | | | | | | | |
| 일자 | 2019 / 11.19 | 2019 / 11.19 | | | | | | | | | | |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. | | | | | | | | | | | | |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. | | | | | | | | | | | | |
| Calibration Equipment used (M&TE critical for calibration) | | | | | | | | | | | | |
| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration | | | | | | | | | |
| Keithley Multimeter Type 2001 | SN: 0810278 | 03-Sep-19 (No. 25949) | Sep-20 | | | | | | | | | |
| Reference Probs AM1DV2 | SN: 1008 | 20-Dec-18 (No. AM1DV2-1008_Dec18) | Dec-19 | | | | | | | | | |
| DAE4 | SN: 781 | 09-Jan-19 (No. DAE4-781_Jan19) | Jan-20 | | | | | | | | | |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check | | | | | | | | | |
| AMCC | SN: 1050 | 01-Oct-13 (in house check Oct-17) | Oct-20 | | | | | | | | | |
| AMMI Audio Measuring Instrument | SN: 1062 | 26-Sep-12 (in house check Oct-17) | Oct-20 | | | | | | | | | |
| Calibrated by: | Name Leif Klyaner | Function Laboratory Technician | Signature <i>[Signature]</i> | | | | | | | | | |
| Approved by: | Name Katja Pokovic | Function Technical Manager | Signature <i>[Signature]</i> | | | | | | | | | |
| | | | Issued: November 20, 2019 | | | | | | | | | |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. | | | | | | | | | | | | |

[References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

AM1D probe identification and configuration data

| | |
|-----------|--------------------------------------|
| Item | AM1DV3 Audio Magnetic 1D Field Probe |
| Type No | SP AM1 001 BA |
| Serial No | 3050 |

| | |
|--------------------|------------------------------------|
| Overall length | 296 mm |
| Tip diameter | 6.0 mm (at the tip) |
| Sensor offset | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB |

| | |
|-----------------------|--|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zurich, Switzerland |
|-----------------------|--|

Calibration data

| | | | |
|--------------------------|------------------|------------------------|-----------------|
| Connector rotation angle | (in DASY system) | 214.5 ° | +/- 3.6 ° (k=2) |
| Sensor angle | (in DASY system) | 0.20 ° | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz | (in DASY system) | 0.00752 V/(A/m) | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **HCT (Dymstec)**

Certificate No: **AM1DV3-3049_May20**

CALIBRATION CERTIFICATE

Object **AM1DV3 - SN: 3049**

Calibration procedure(s) **QA CAL-24.v4
Calibration procedure for AM1D magnetic field probes and TMFS in the
audio range**

Calibration date: **May 26, 2020**

| | | |
|-------|--------------------|--------------------|
| 결 | 담당자 | 화인자 |
| 재 | <i>[Signature]</i> | <i>[Signature]</i> |
| 직원/성명 | SW 12월 9 | HS 1 2020 |
| 일 차 | 2020 6.16 | 2020 6.16 |

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards | ID # | Cal Date (Certificate No.) | Scheduled Calibration |
|---------------------------------|-------------|-----------------------------------|-----------------------|
| Keithley Multimeter Type 2001 | SN: 0810278 | 03-Sep-19 (No. 25949) | Sep-20 |
| Reference Probe AM1DV2 | SN: 1008 | 10-Dec-19 (No. AM1DV2-1008_Dec19) | Dec-20 |
| DAE4 | SN: 781 | 27-Dec-19 (No. DAE4-781_Dec19) | Dec-20 |
| Secondary Standards | ID # | Check Date (in house) | Scheduled Check |
| AMCC | SN: 1050 | 01-Oct-13 (in house check Oct-17) | Oct-20 |
| AMMI Audio Measuring Instrument | SN: 1062 | 26-Sep-12 (in house check Oct-17) | Oct-20 |

| | | | |
|----------------|-----------------------|-----------------------------------|---------------------------------|
| Calibrated by: | Name Leif Klysner | Function Laboratory Technician | Signature <i>[Signature]</i> |
| Approved by: | Name Katja Pekovic | Function Technical Manager | Signature <i>[Signature]</i> |

Issued: May 27, 2020

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

References

- [1] ANSI-C63.19-2007
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [2] ANSI-C63.19-2011
American National Standard, Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.
- [3] DASY5 manual, Chapter: Hearing Aid Compatibility (HAC) T-Coil Extension

Description of the AM1D probe

The AM1D Audio Magnetic Field Probe is a fully shielded magnetic field probe for the frequency range from 100 Hz to 20 kHz. The pickup coil is compliant with the dimensional requirements of [1+2]. The probe includes a symmetric low noise amplifier for the signal available at the shielded 3 pin connector at the side. Power is supplied via the same connector (phantom power supply) and monitored via the LED near the connector. The 7 pin connector at the end of the probe does not carry any signals, but determines the angle of the sensor when mounted on the DAE. The probe supports mechanical detection of the surface.

The single sensor in the probe is arranged in a tilt angle allowing measurement of 3 orthogonal field components when rotating the probe by 120° around its axis. It is aligned with the perpendicular component of the field, if the probe axis is tilted nominally 35.3° above the measurement plane, using the connector rotation and sensor angle stated below.

The probe is fully RF shielded when operated with the matching signal cable (shielded) and allows measurement of audio magnetic fields in the close vicinity of RF emitting wireless devices according to [1+2] without additional shielding.

Handling of the item

The probe is manufactured from stainless steel. In order to maintain the performance and calibration of the probe, it must not be opened. The probe is designed for operation in air and shall not be exposed to humidity or liquids. For proper operation of the surface detection and emergency stop functions in a DASY system, the probe must be operated with the special probe cup provided (larger diameter).

Methods Applied and Interpretation of Parameters

- *Coordinate System:* The AM1D probe is mounted in the DASY system for operation with a HAC Test Arch phantom with AMCC Helmholtz calibration coil according to [3], with the tip pointing to "southwest" orientation.
- *Functional Test:* The functional test preceding calibration includes test of Noise level RF immunity (1kHz AM modulated signal). The shield of the probe cable must be well connected. Frequency response verification from 100 Hz to 10 kHz.
- *Connector Rotation:* The connector at the end of the probe does not carry any signals and is used for fixation to the DAE only. The probe is operated in the center of the AMCC Helmholtz coil using a 1 kHz magnetic field signal. Its angle is determined from the two minima at nominally +120° and -120° rotation, so the sensor in the tip of the probe is aligned to the vertical plane in z-direction, corresponding to the field maximum in the AMCC Helmholtz calibration coil.
- *Sensor Angle:* The sensor tilting in the vertical plane from the ideal vertical direction is determined from the two minima at nominally +120° and -120°. DASY system uses this angle to align the sensor for radial measurements to the x and y axis in the horizontal plane.
- *Sensitivity:* With the probe sensor aligned to the z-field in the AMCC, the output of the probe is compared to the magnetic field in the AMCC at 1 kHz. The field in the AMCC Helmholtz coil is given by the geometry and the current through the coil, which is monitored on the precision shunt resistor of the coil.

AM1D probe identification and configuration data

| | |
|-----------|---|
| Item | AM1DV3 Audio Magnetic 1D Field Probe |
| Type No | SP AM1 001 BA |
| Serial No | 3049 |

| | |
|--------------------|------------------------------------|
| Overall length | 296 mm |
| Tip diameter | 6.0 mm (at the tip) |
| Sensor offset | 3.0 mm (centre of sensor from tip) |
| Internal Amplifier | 20 dB |

| | |
|-----------------------|--|
| Manufacturer / Origin | Schmid & Partner Engineering AG, Zurich, Switzerland |
|-----------------------|--|

Calibration data

| | | | |
|--------------------------|------------------|------------------------|-----------------|
| Connector rotation angle | (in DASY system) | 279.8 ° | +/- 3.6 ° (k=2) |
| Sensor angle | (in DASY system) | -0.49 ° | +/- 0.5 ° (k=2) |
| Sensitivity at 1 kHz | (in DASY system) | 0.00746 V/(A/m) | +/- 2.2 % (k=2) |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.