



**Antenna 0(K patch), n260 100 MHz 1 CC SISO [40 GHz ~ 60 GHz]**


**Low Channel Pol. H**

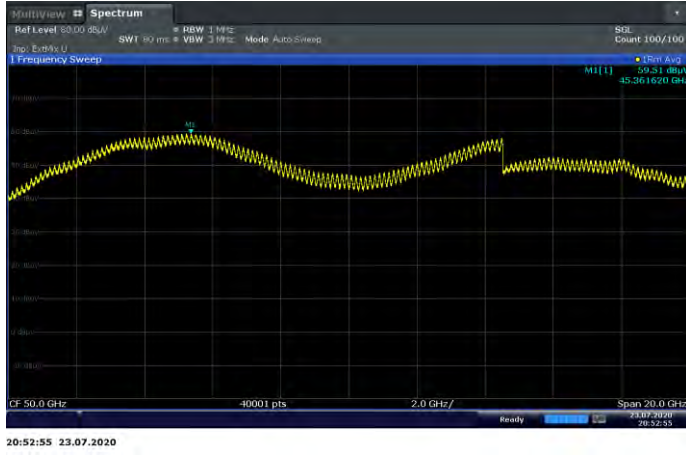


**Low Channel Pol. V**

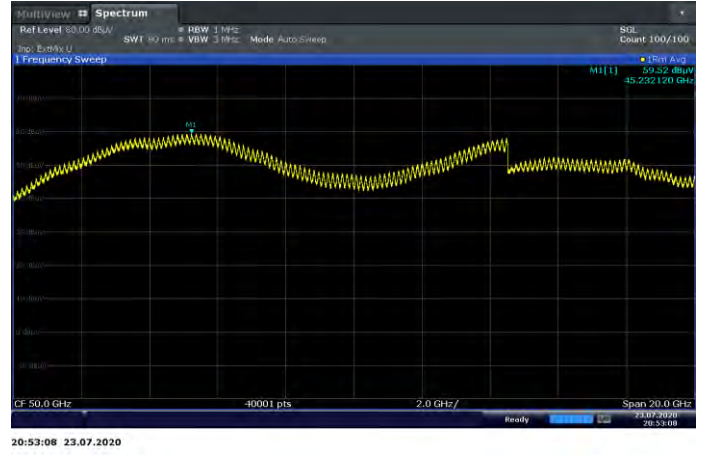


**Middle Channel Pol. H**

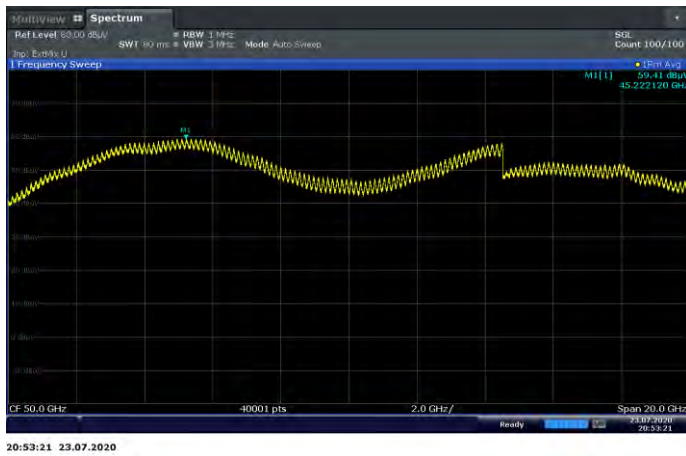


**Middle Channel Pol. V**

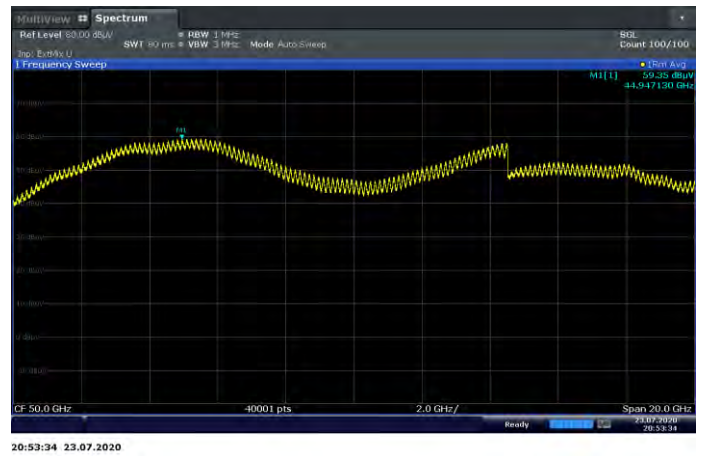

**High Channel Pol. H**

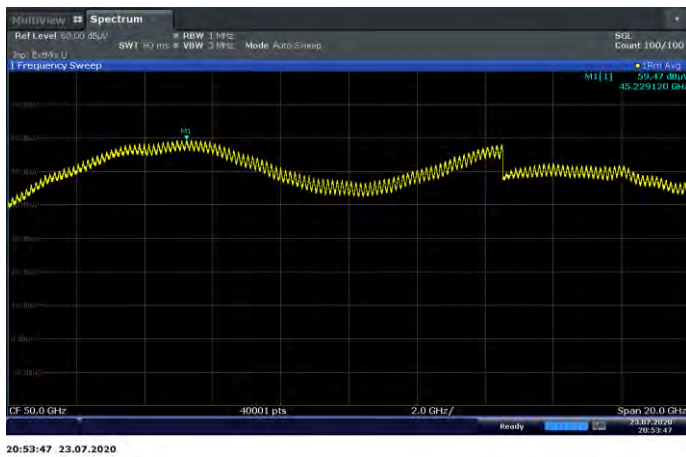


**High Channel Pol. V**

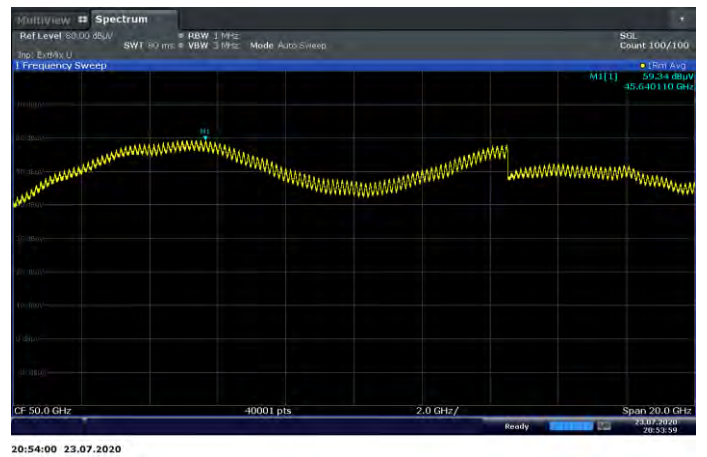


**Antenna 0(K patch), n260 100 MHz 1 CC MIMO [40 GHz ~ 60 GHz]**


**Low Channel Pol. H**

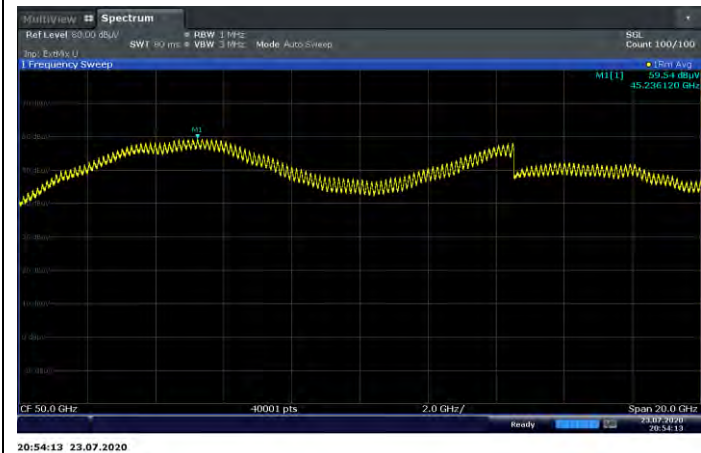


**Low Channel Pol. V**

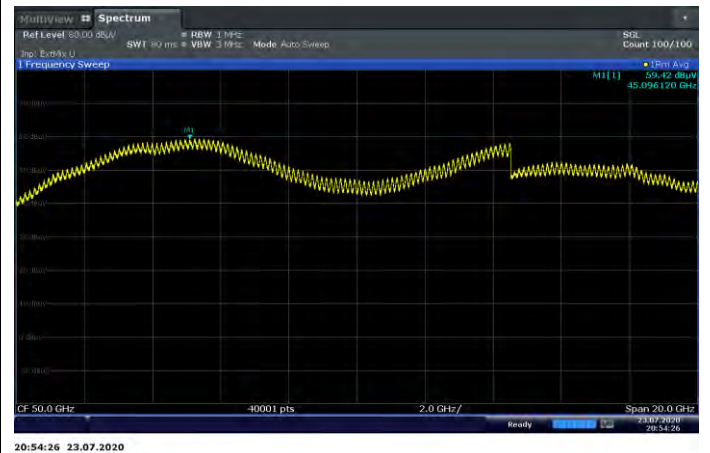


**Middle Channel Pol. H**

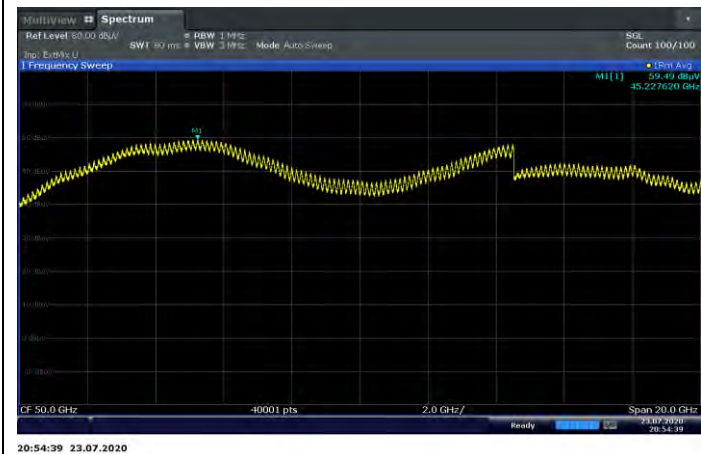


**Middle Channel Pol. V**

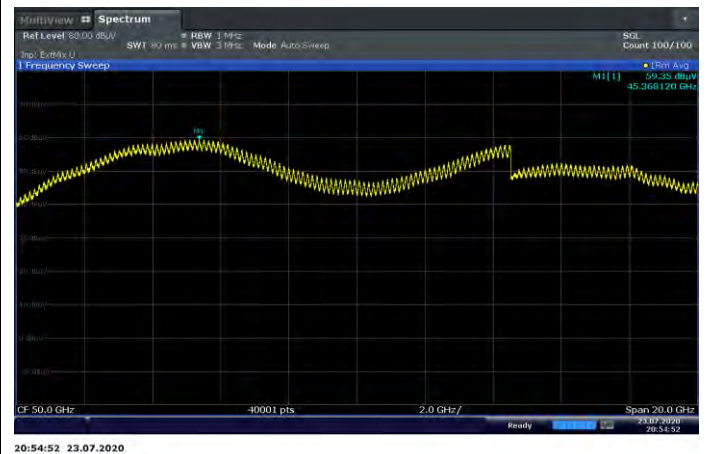

**High Channel Pol. H**

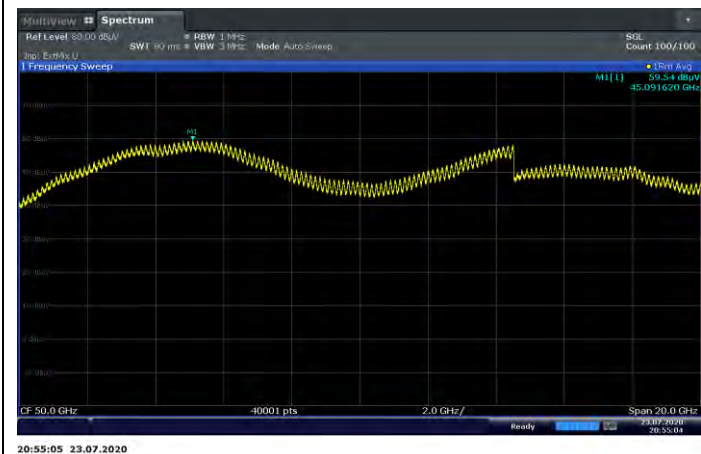


**High Channel Pol. V**

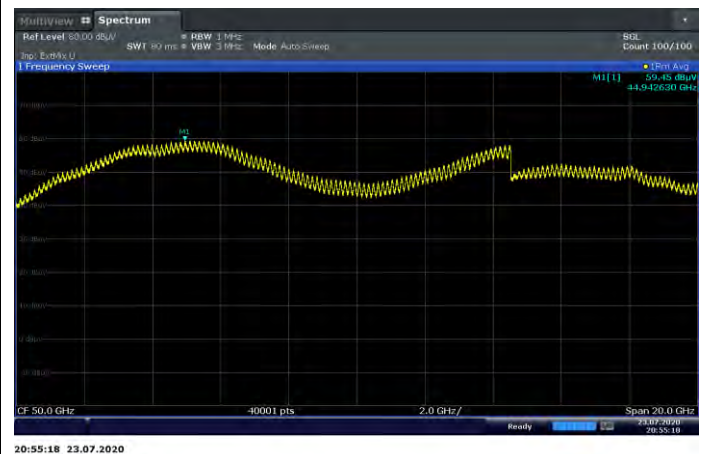


**Antenna 1(L patch), n260 50 MHz 1 CC SISO [40 GHz ~ 60 GHz]**


**Low Channel Pol. H**

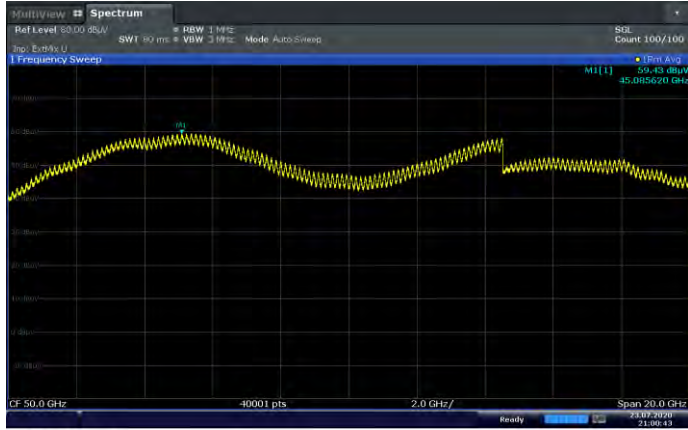


**Low Channel Pol. V**

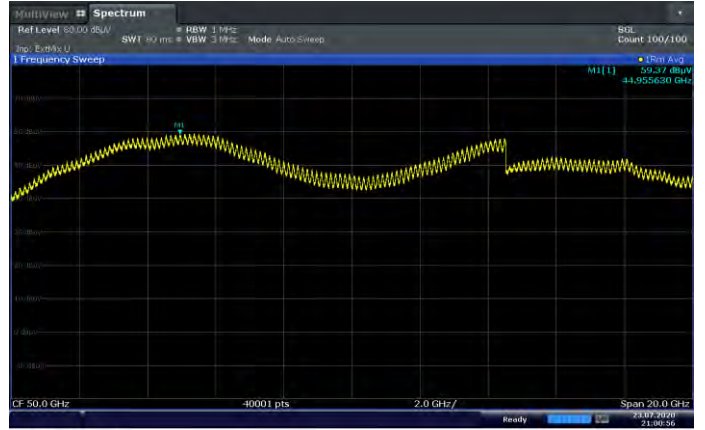


**Middle Channel Pol. H**

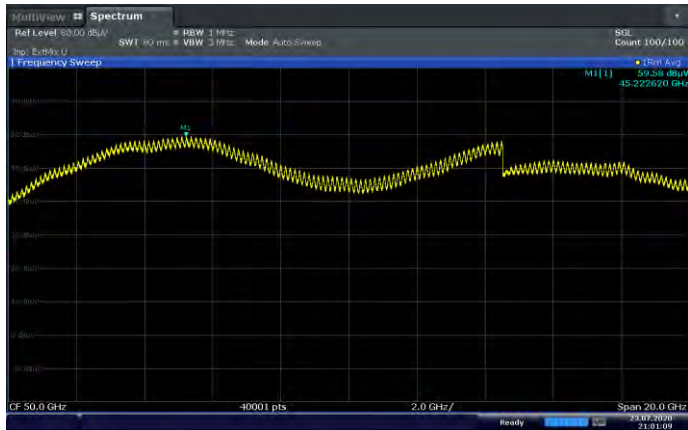


**Middle Channel Pol. V**

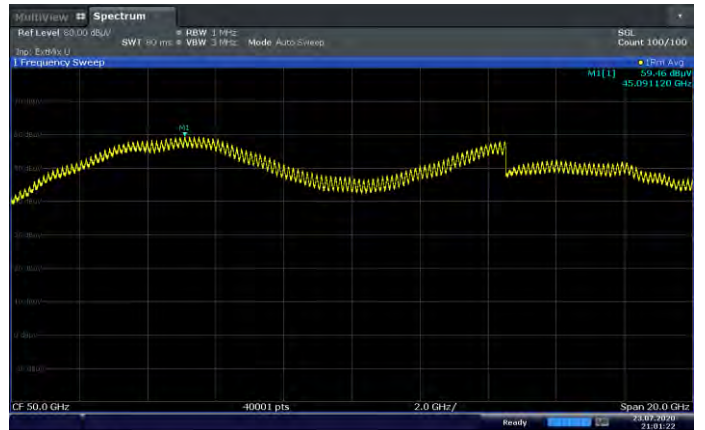

**High Channel Pol. H**

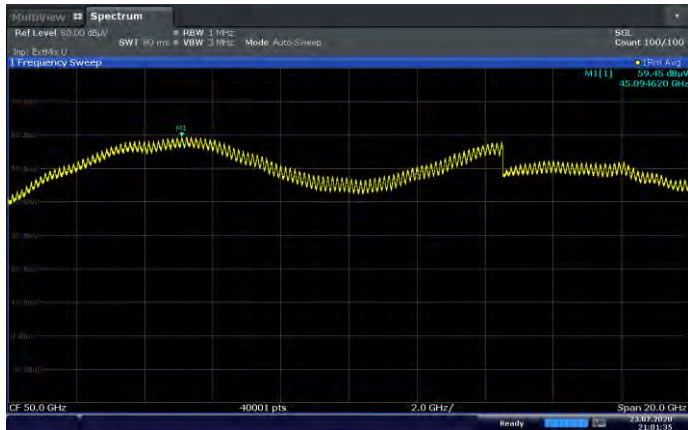


**High Channel Pol. V**

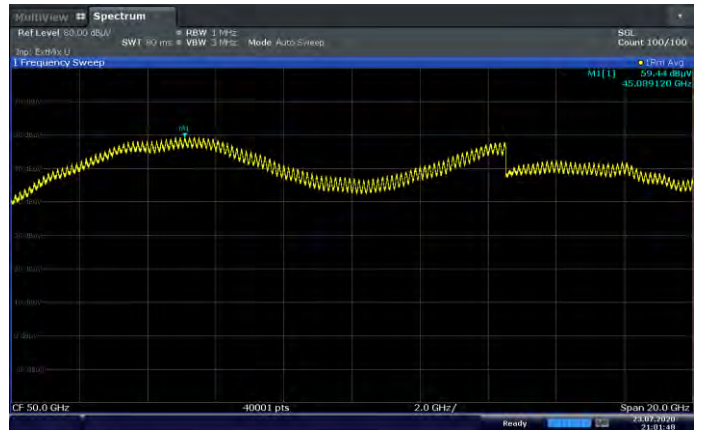




**Antenna 1(L patch), n260 50 MHz 1 CC MIMO [40 GHz ~ 60 GHz]**


**Low Channel Pol. H**

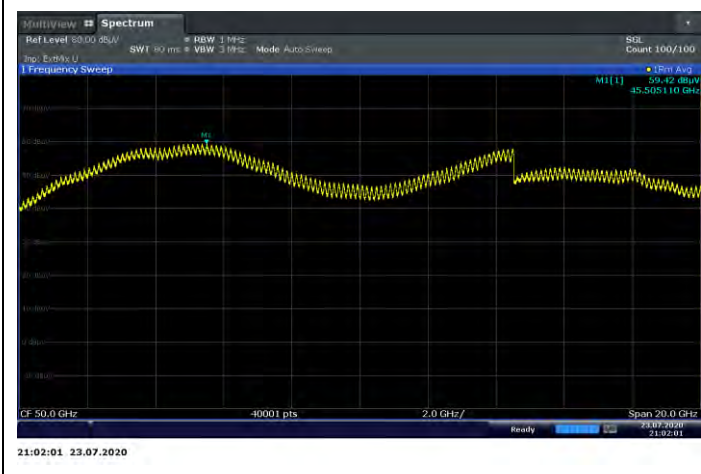


**Low Channel Pol. V**

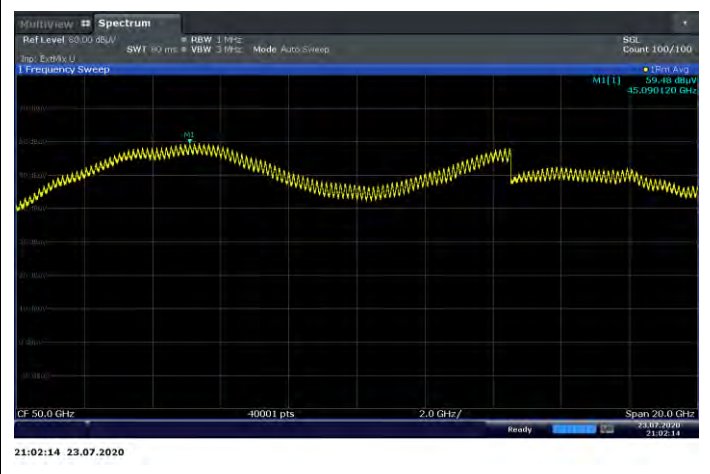


**Middle Channel Pol. H**

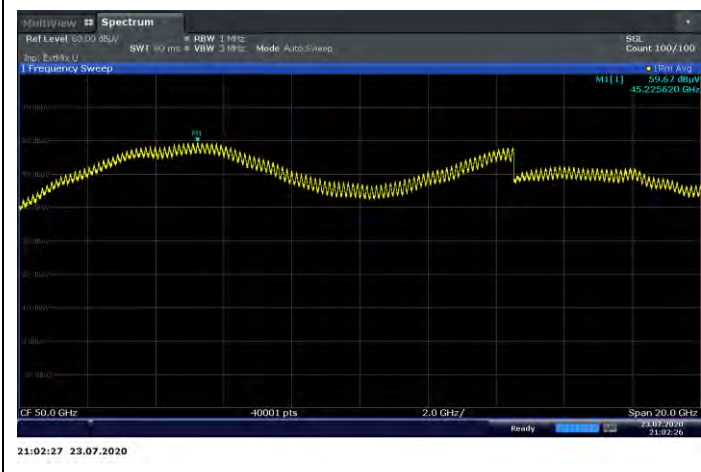


**Middle Channel Pol. V**

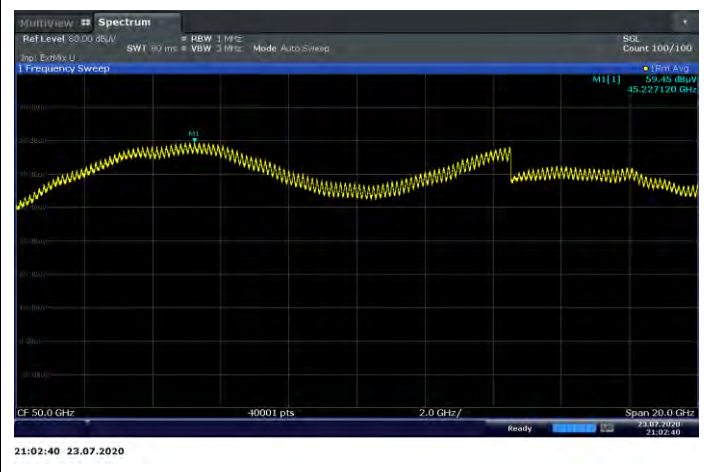

**High Channel Pol. H**

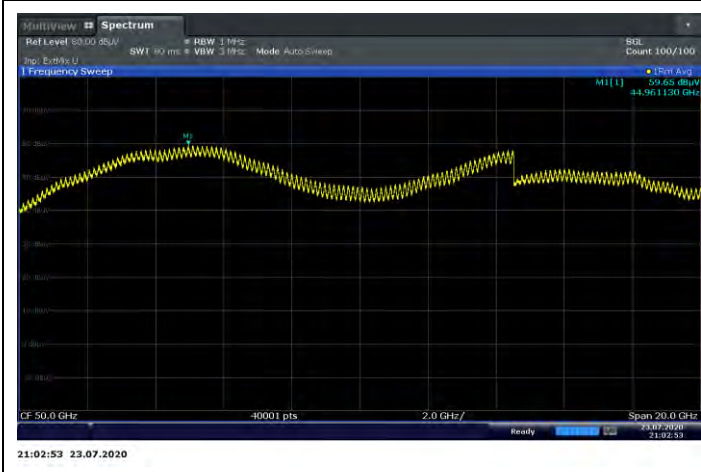


**High Channel Pol. V**

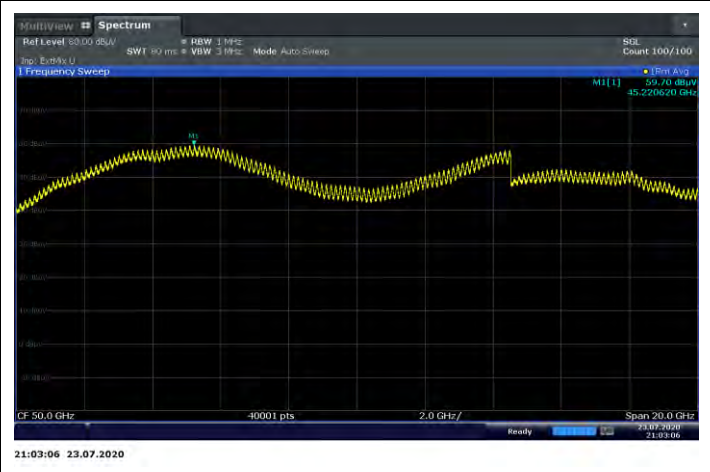


**Antenna 1(L patch), n260 100 MHz 1 CC SISO [40 GHz ~ 60 GHz]**

**Low Channel Pol. H**

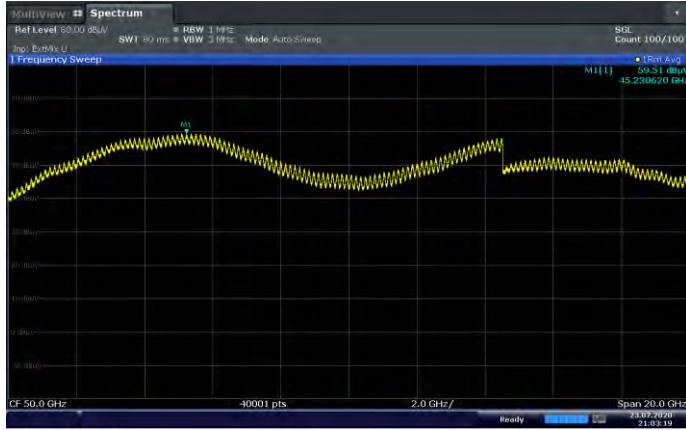


21:03:19 23.07.2020

**Low Channel Pol. V**

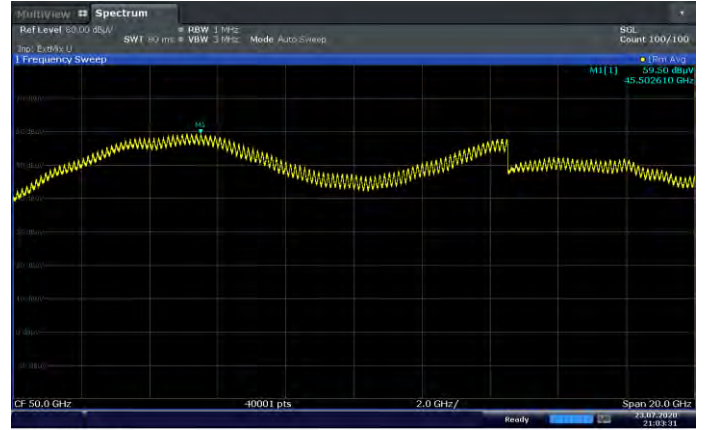


21:03:32 23.07.2020

**Middle Channel Pol. H**

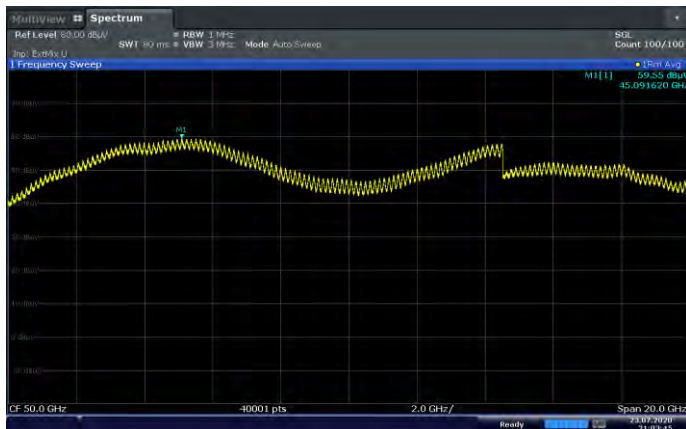


21:03:46 23.07.2020

**Middle Channel Pol. V**

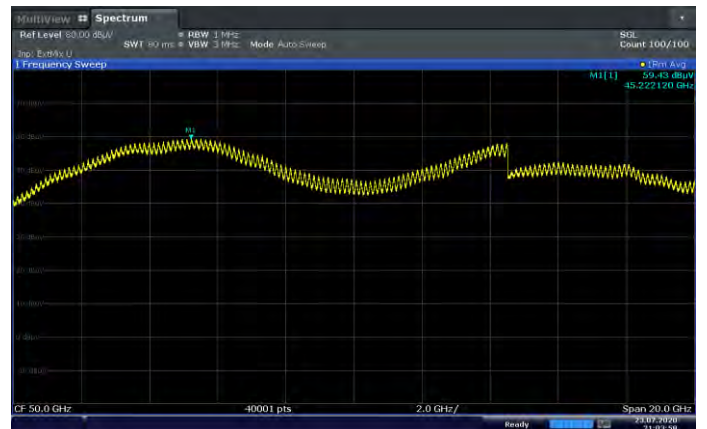


21:03:59 23.07.2020

**High Channel Pol. H**

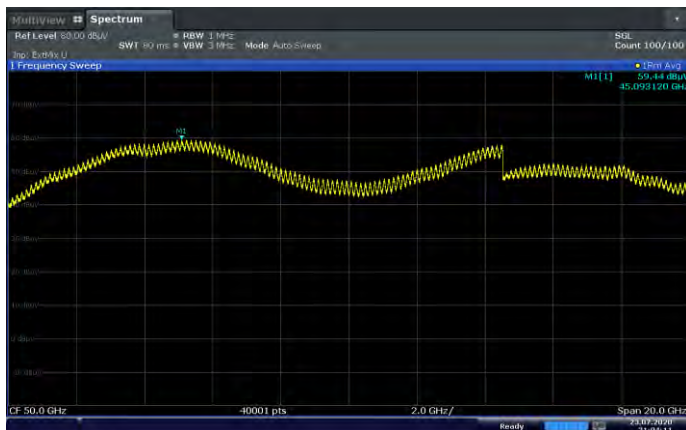

21:04:12 23.07.2020


**High Channel Pol. V**

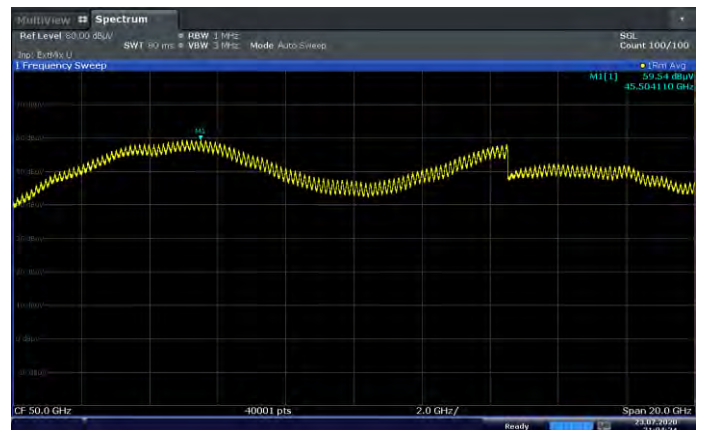


21:04:24 23.07.2020

**Antenna 1(L patch), n260 100 MHz 1 CC MIMO [40 GHz ~ 60 GHz]**


**Low Channel Pol. H**

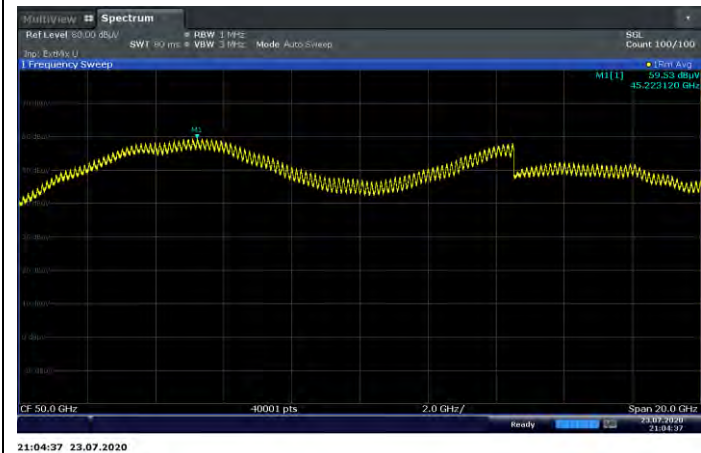


**Low Channel Pol. V**

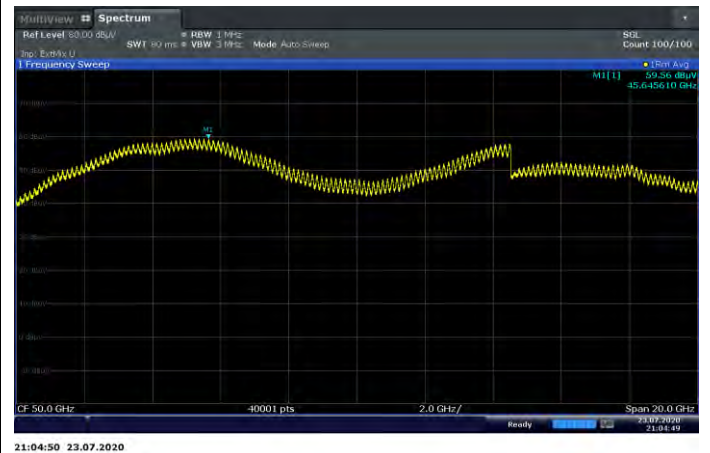


**Middle Channel Pol. H**

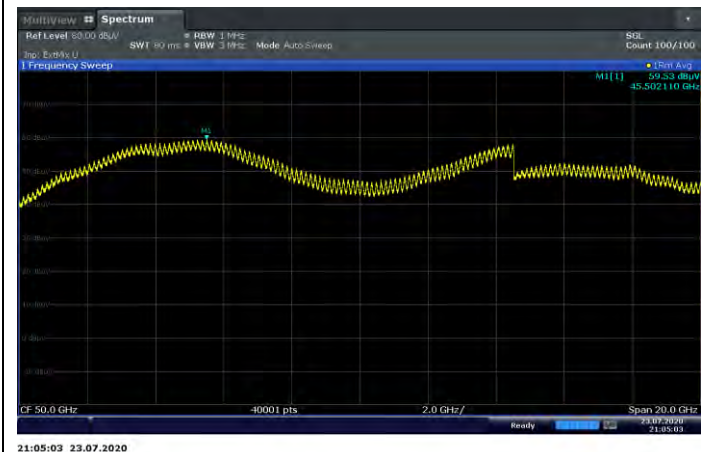


**Middle Channel Pol. V**

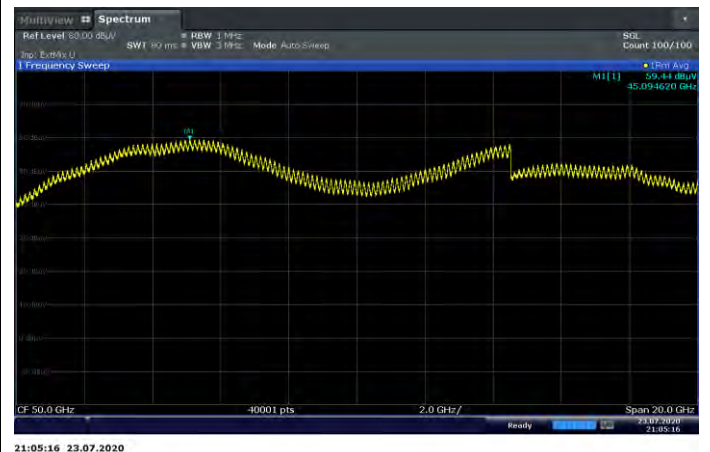

**High Channel Pol. H**

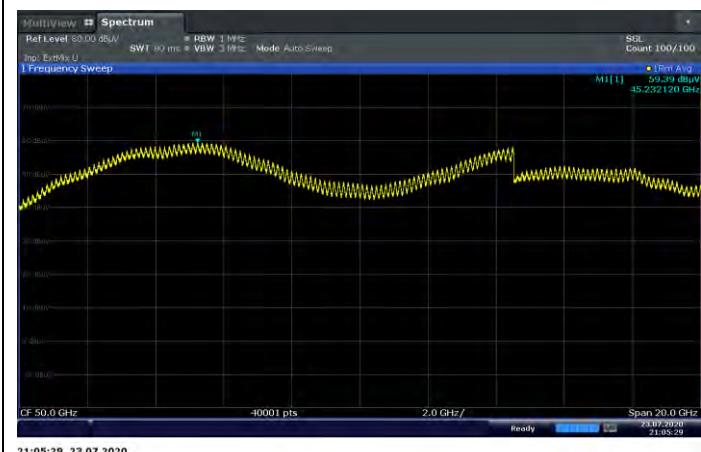


**High Channel Pol. V**

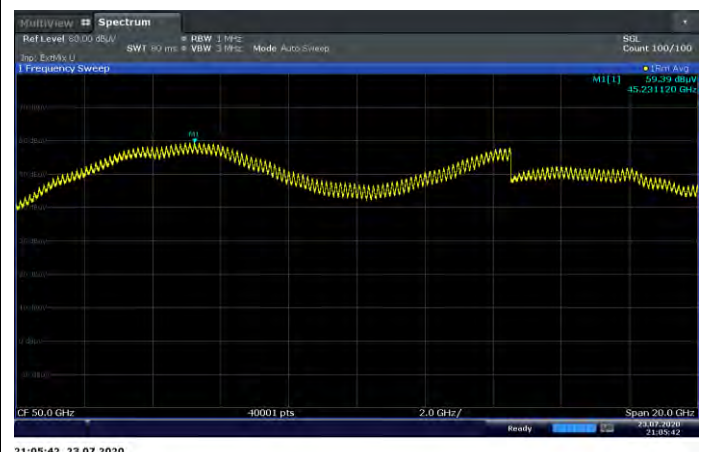




**Antenna 0(K patch), n260 50 MHz 1 CC SISO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

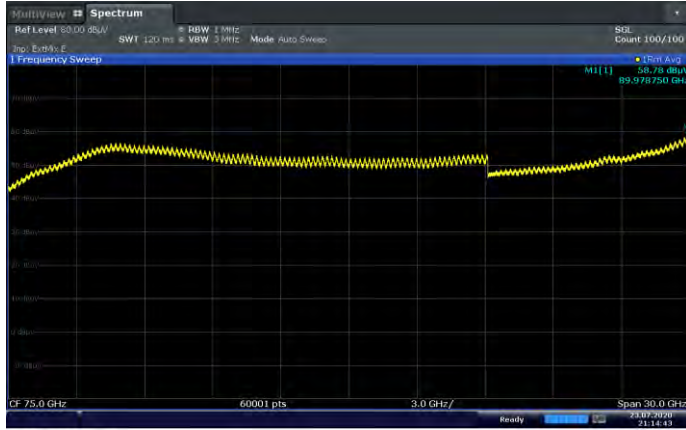


**Low Channel Pol. V**

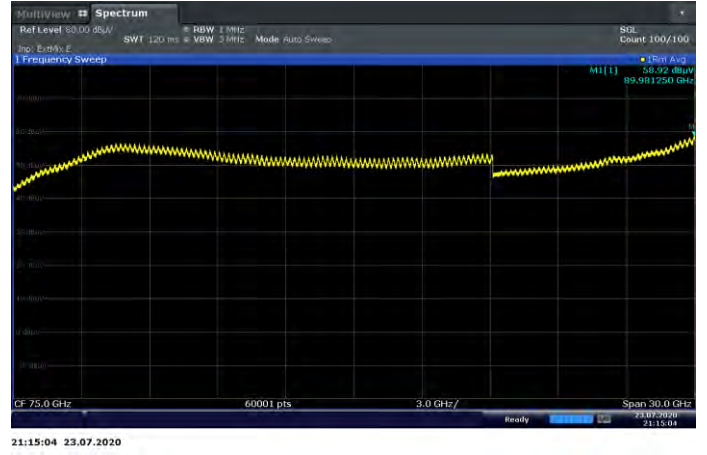


**Middle Channel Pol. H**

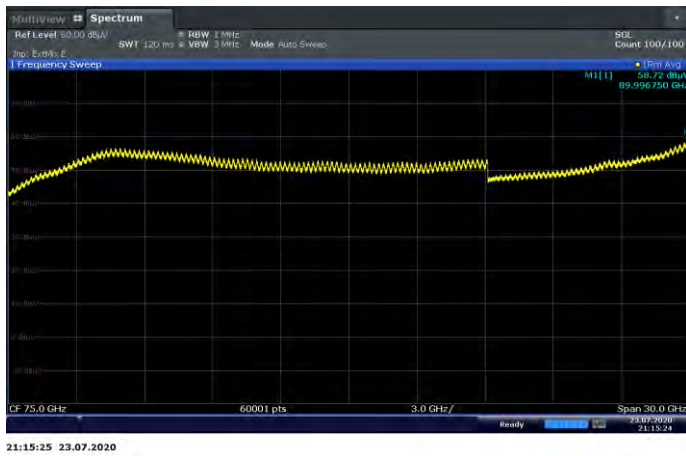


**Middle Channel Pol. V**

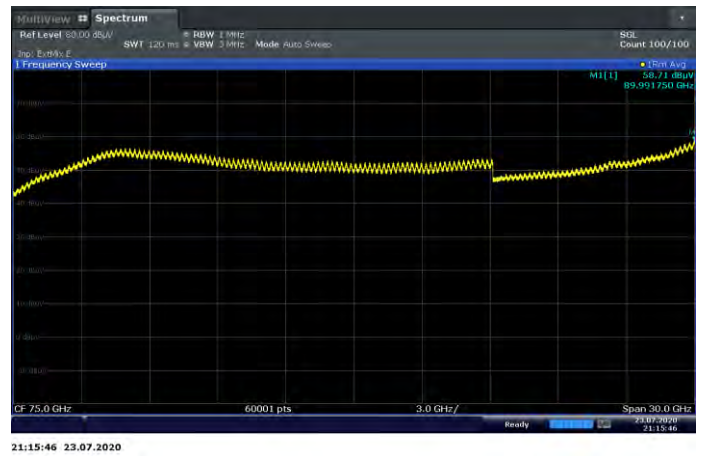

**High Channel Pol. H**

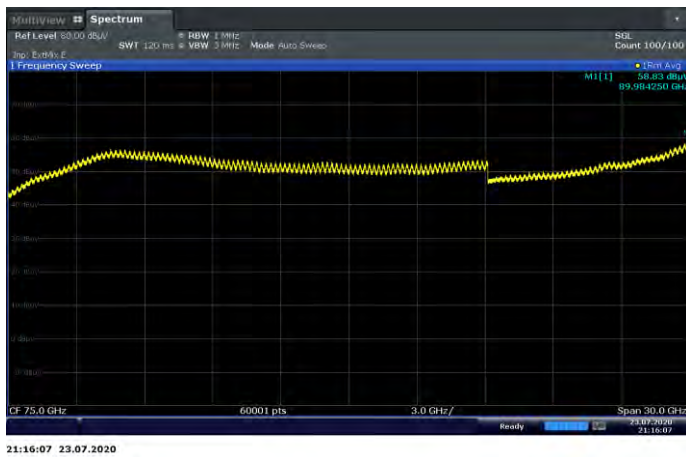


**High Channel Pol. V**

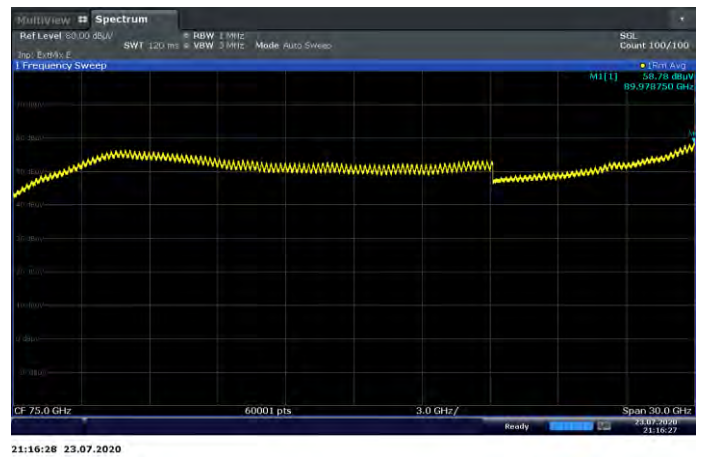


**Antenna 0(K patch), n260 50 MHz 1 CC MIMO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

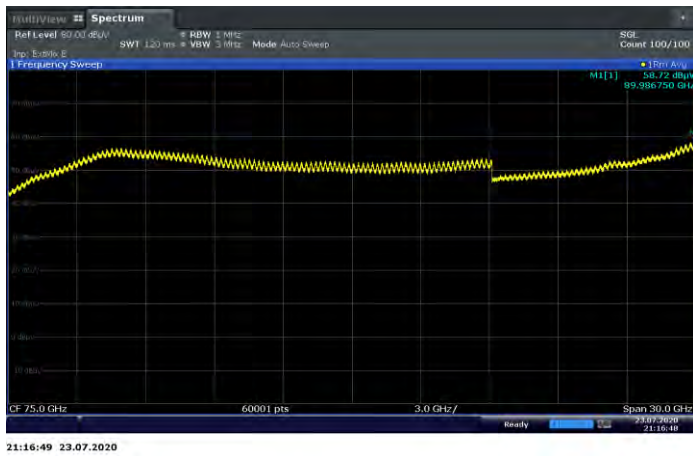


**Low Channel Pol. V**

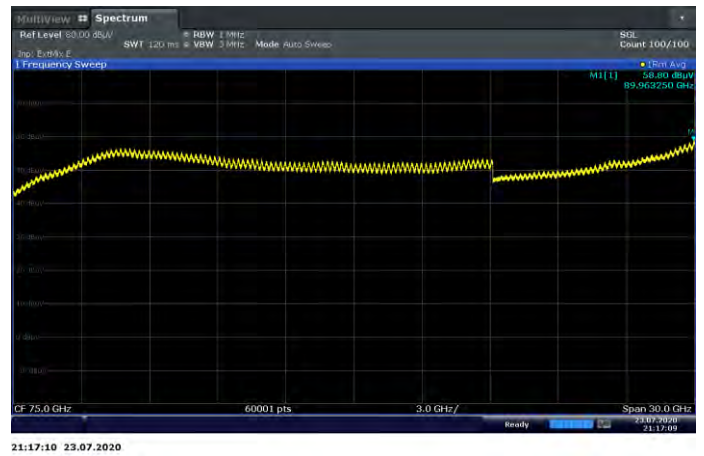


**Middle Channel Pol. H**

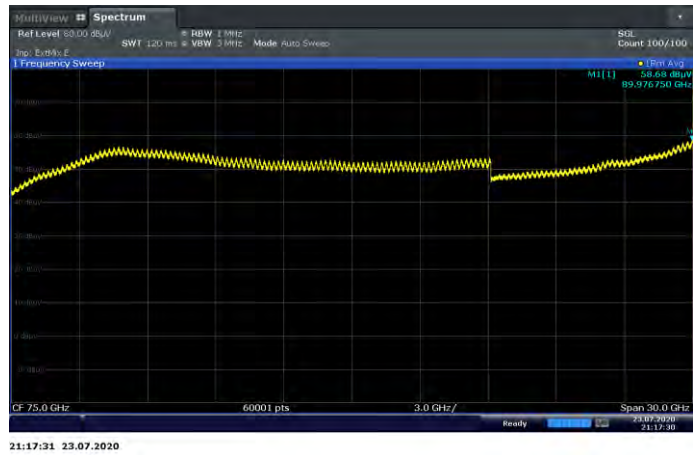


**Middle Channel Pol. V**

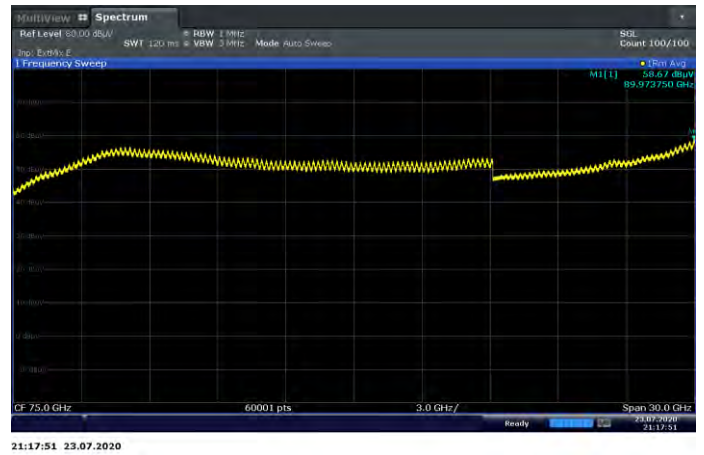

**High Channel Pol. H**

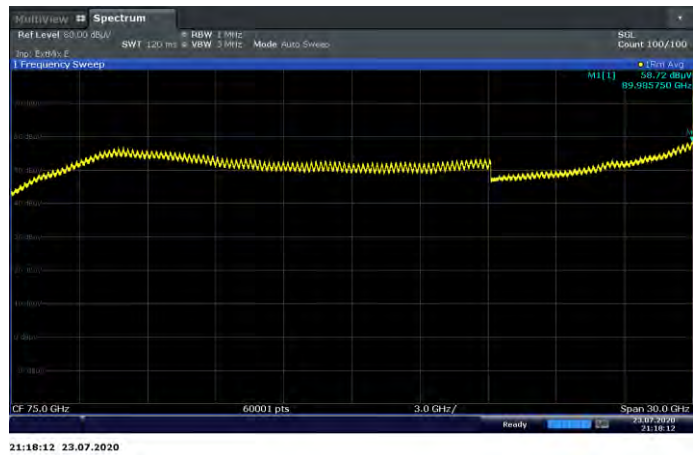


**High Channel Pol. V**

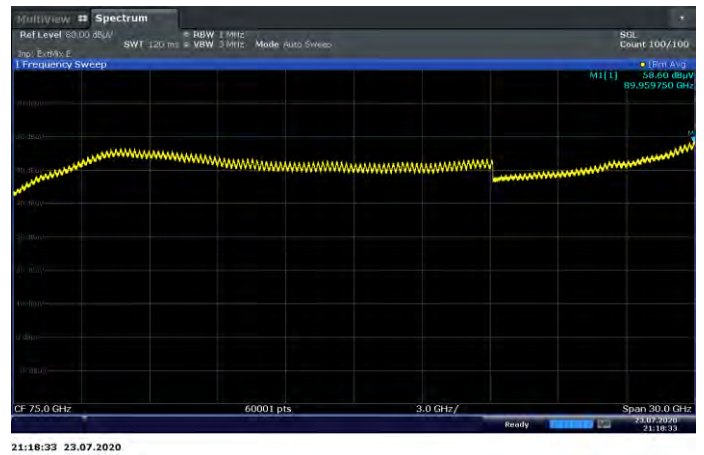




**Antenna 0(K patch), n260 100 MHz 1 CC SISO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

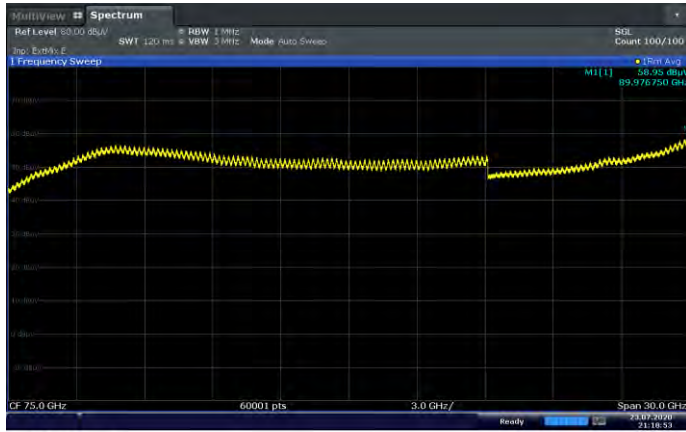


**Low Channel Pol. V**

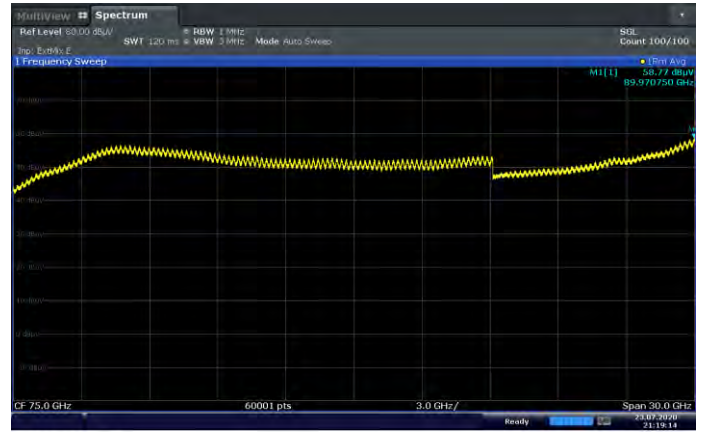


**Middle Channel Pol. H**

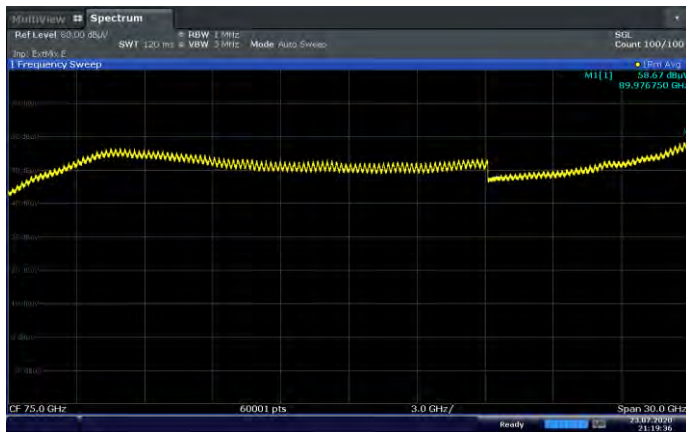


**Middle Channel Pol. V**

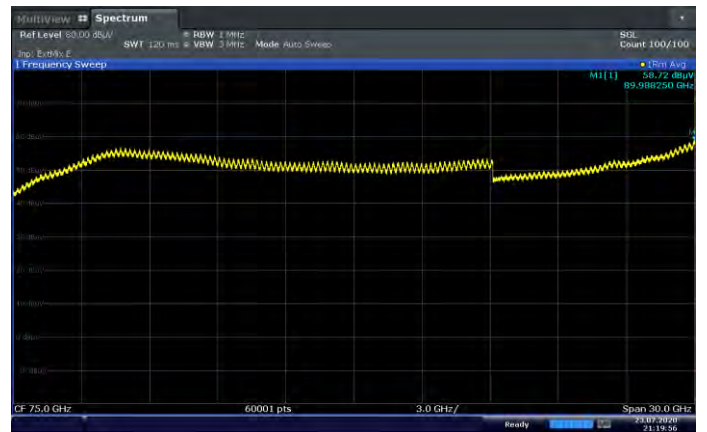

**High Channel Pol. H**

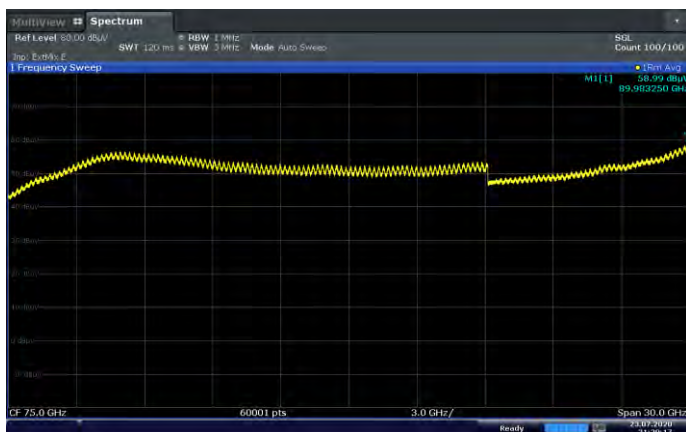


**High Channel Pol. V**

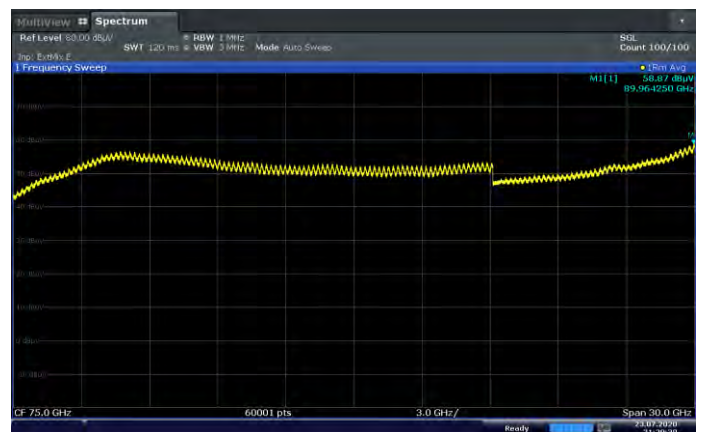


**Antenna 0(K patch), n260 100 MHz 1 CC MIMO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

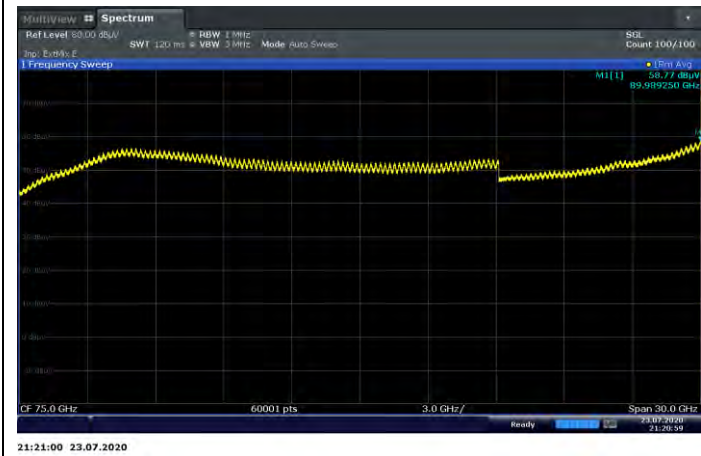


**Low Channel Pol. V**

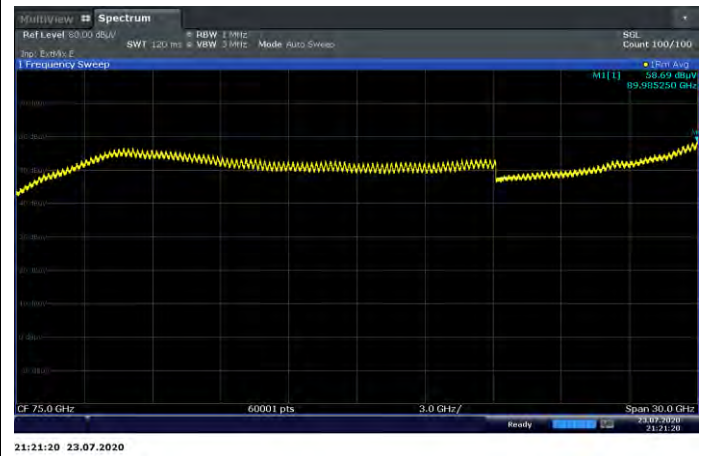


**Middle Channel Pol. H**

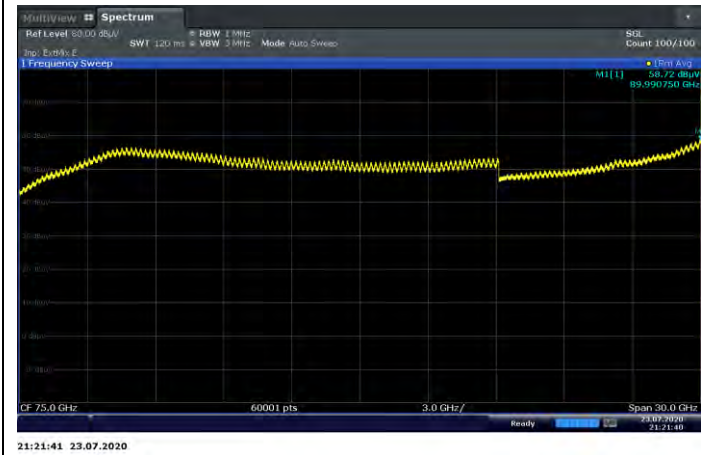


**Middle Channel Pol. V**

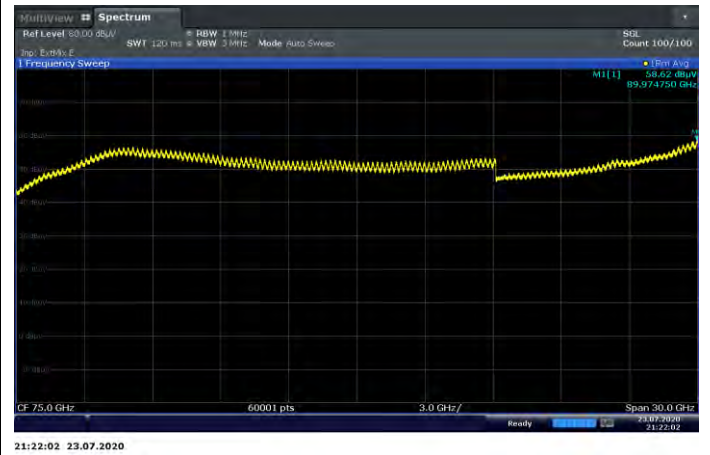

**High Channel Pol. H**

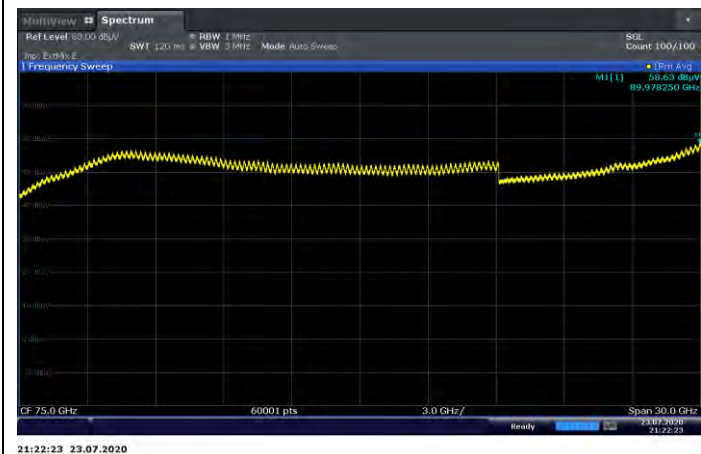


**High Channel Pol. V**

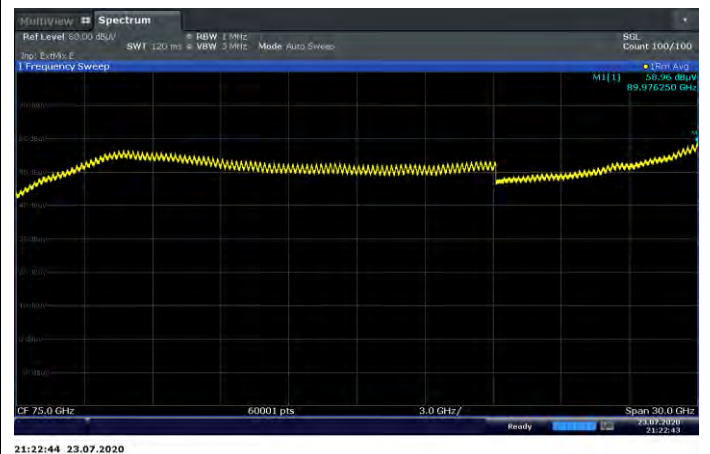


**Antenna 1(L patch), n260 50 MHz 1 CC SISO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

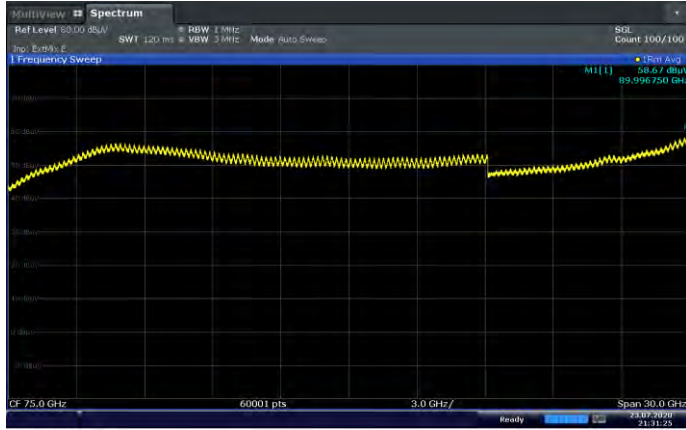


**Low Channel Pol. V**

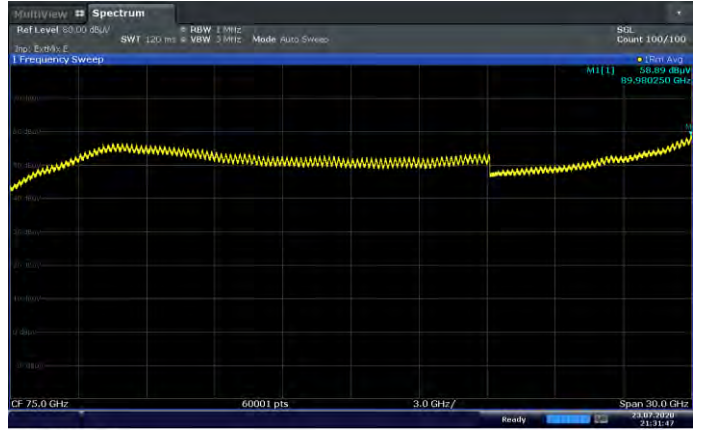


**Middle Channel Pol. H**

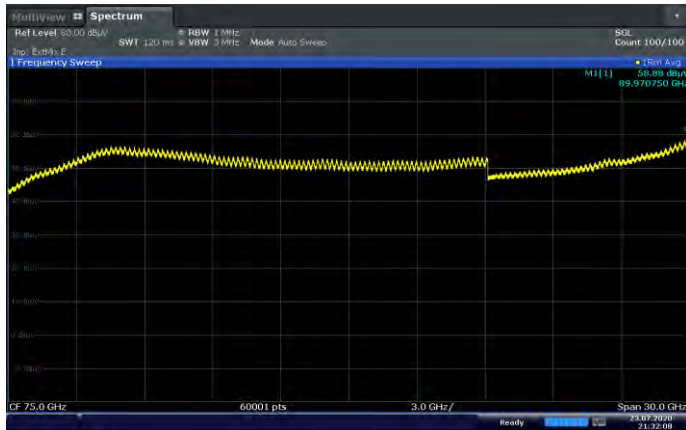


**Middle Channel Pol. V**

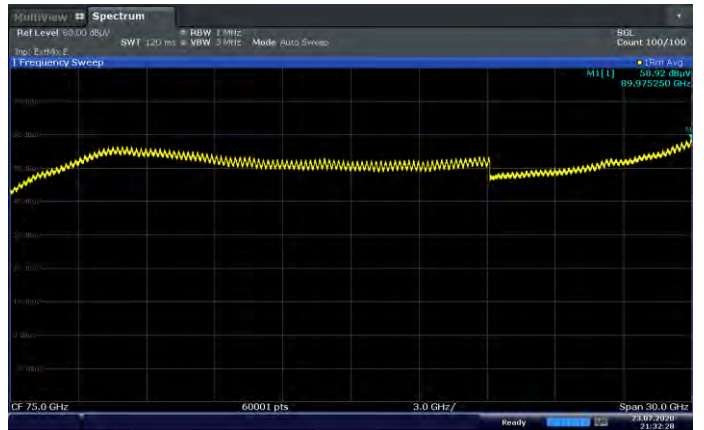

**High Channel Pol. H**

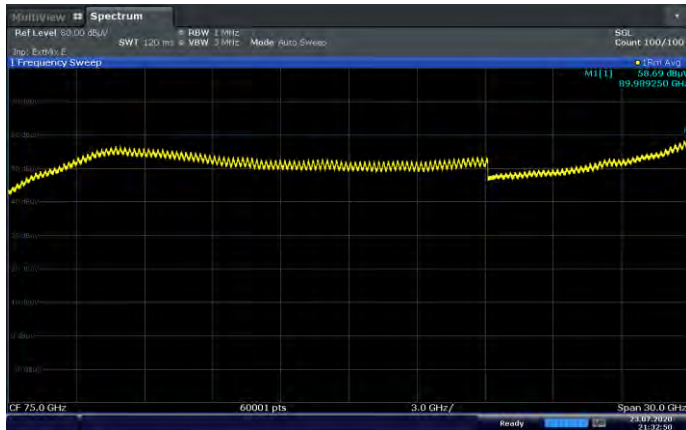


**High Channel Pol. V**

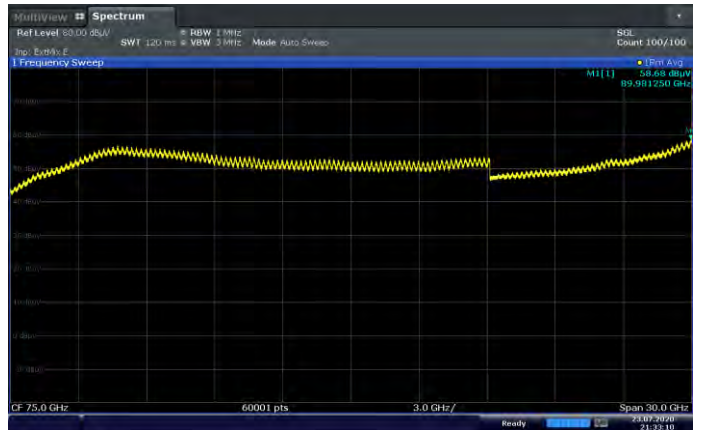




**Antenna 1(L patch), n260 50 MHz 1 CC MIMO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

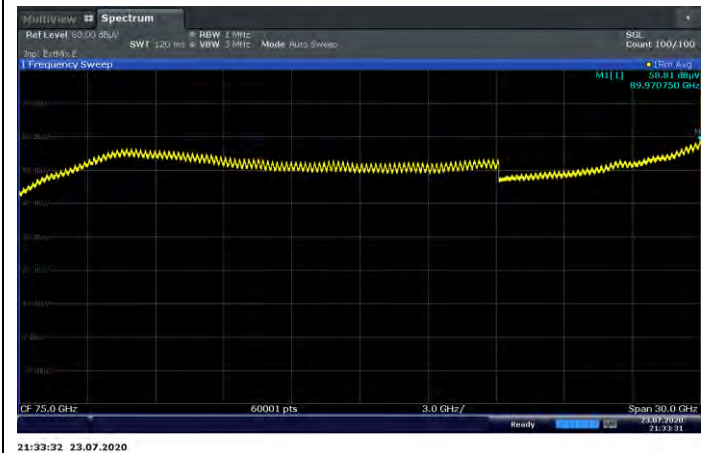


**Low Channel Pol. V**

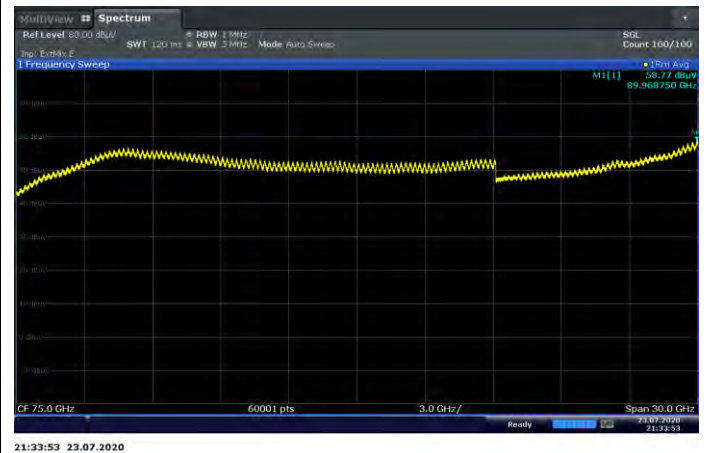


**Middle Channel Pol. H**

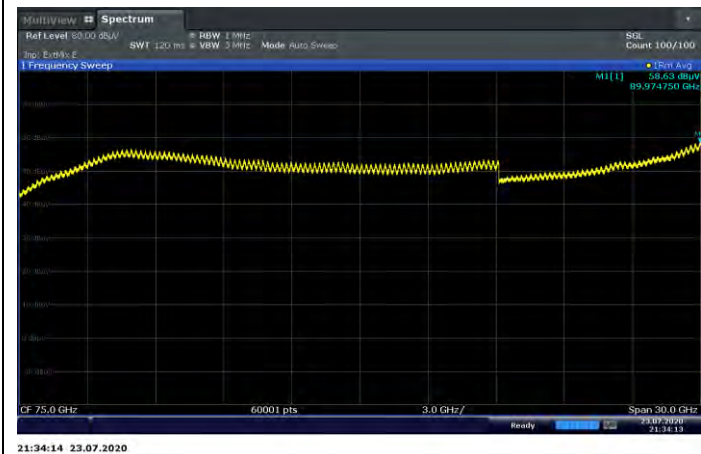


**Middle Channel Pol. V**

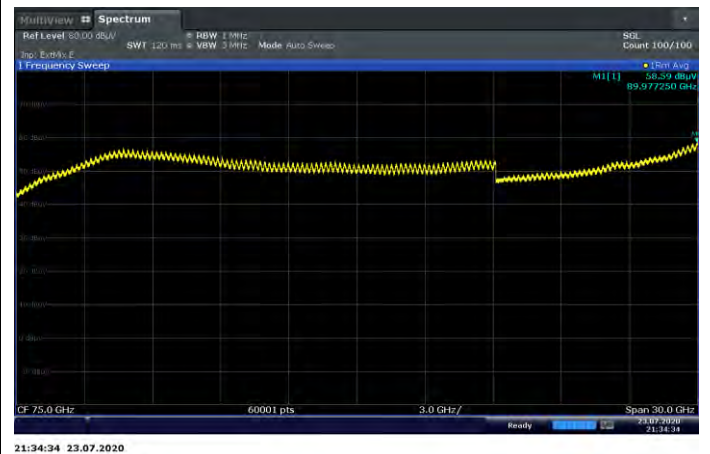

**High Channel Pol. H**

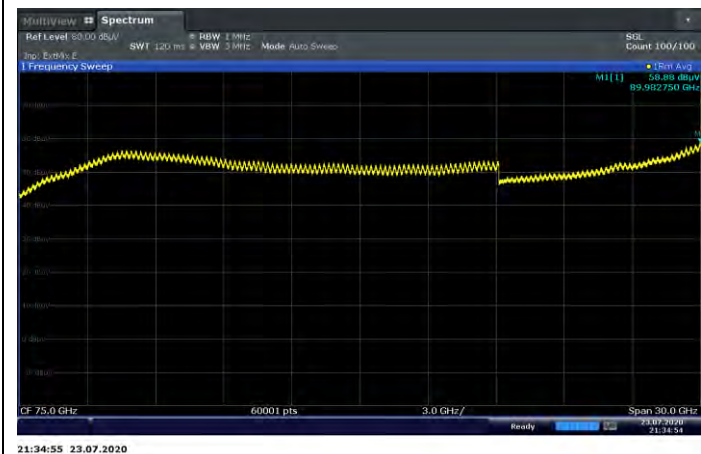


**High Channel Pol. V**

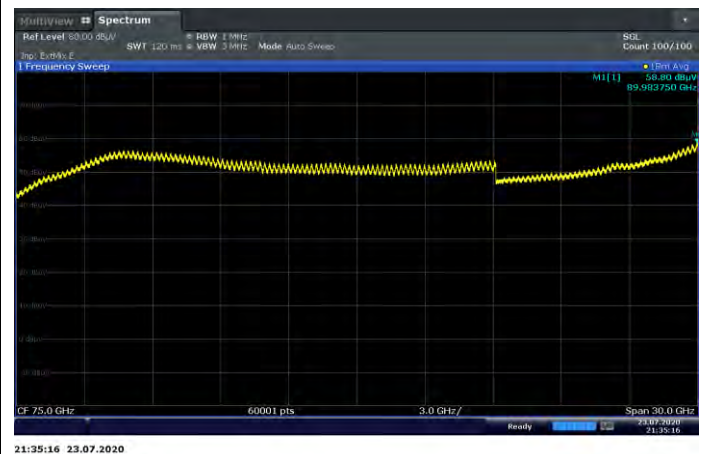


**Antenna 1(L patch), n260 100 MHz 1 CC SISO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

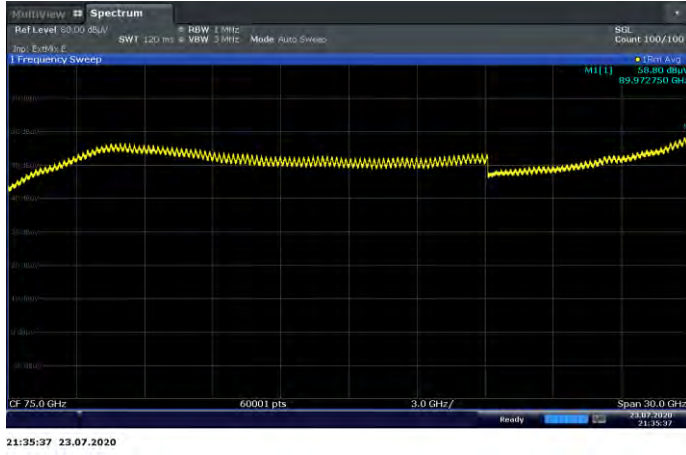


**Low Channel Pol. V**

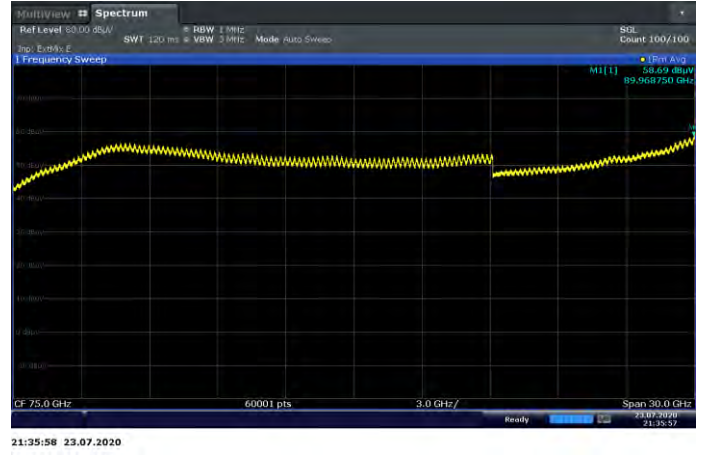


**Middle Channel Pol. H**

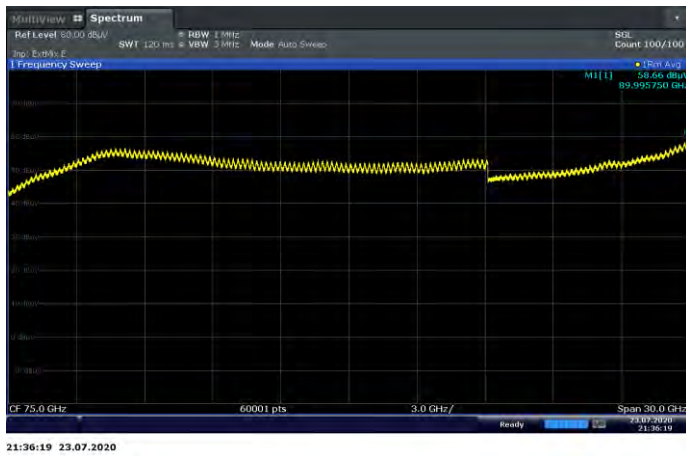


**Middle Channel Pol. V**

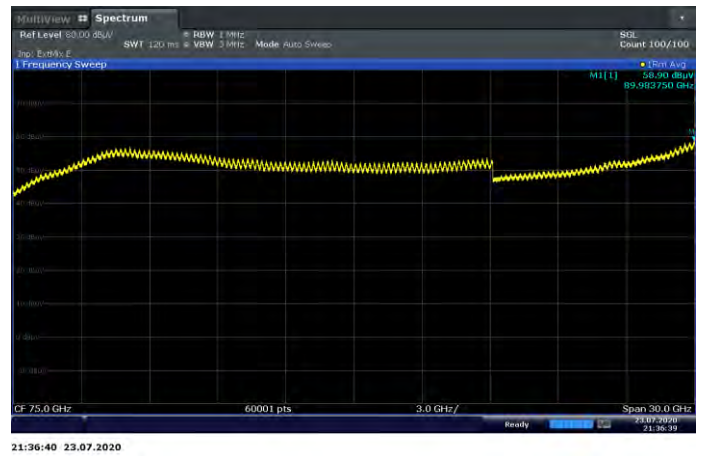

**High Channel Pol. H**

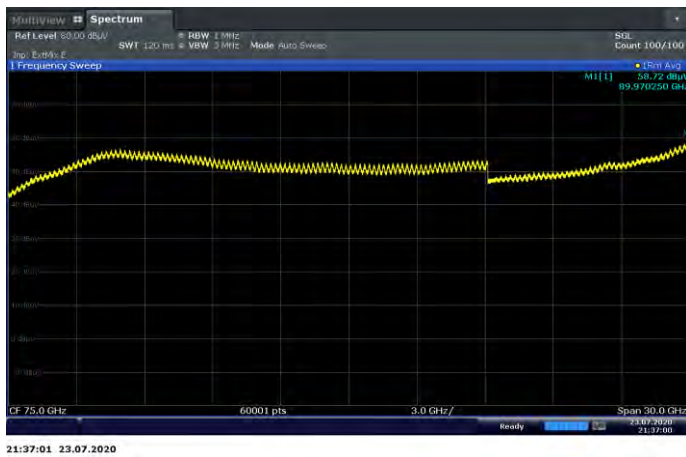


**High Channel Pol. V**

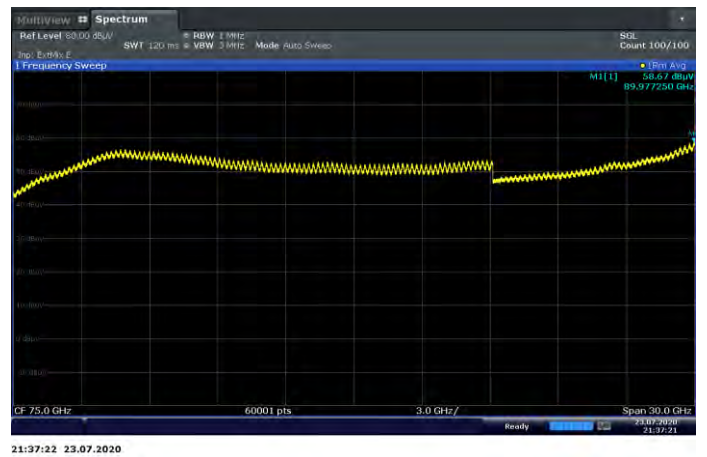


**Antenna 1(L patch), n260 100 MHz 1 CC MIMO [60 GHz ~ 90 GHz]**


**Low Channel Pol. H**

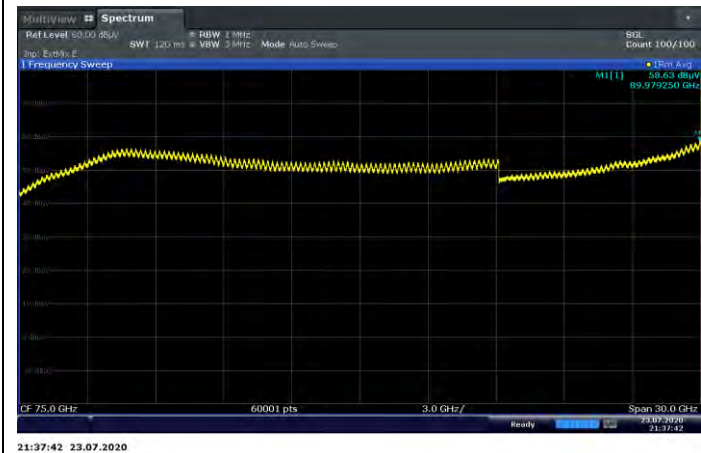


**Low Channel Pol. V**

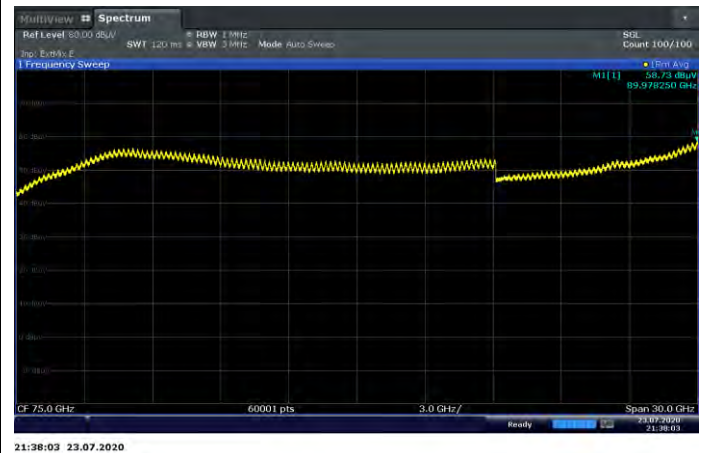


**Middle Channel Pol. H**

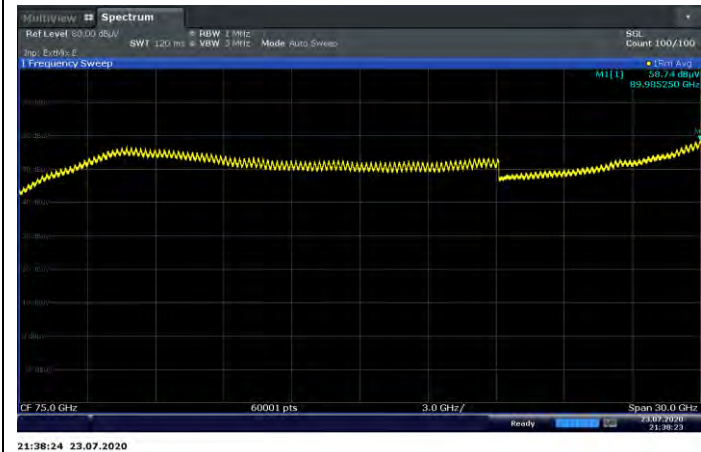


**Middle Channel Pol. V**

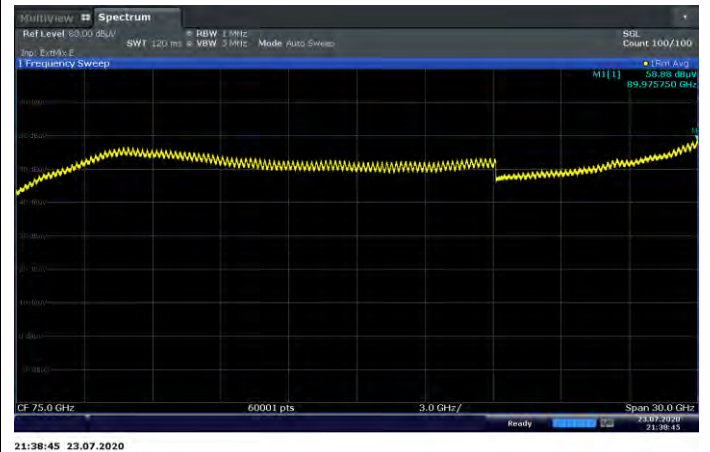

**High Channel Pol. H**

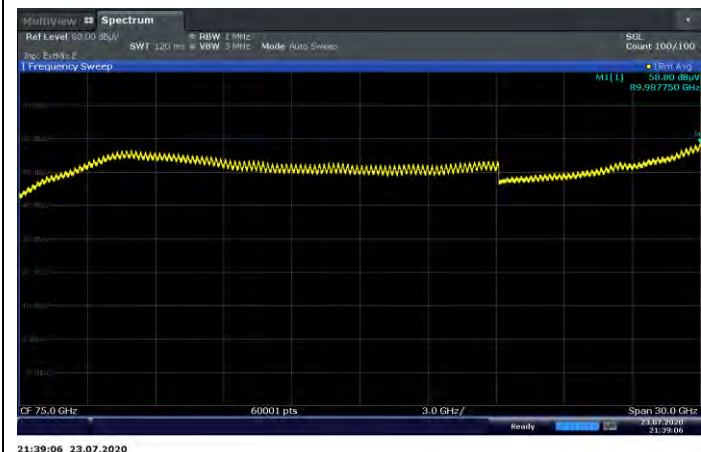


**High Channel Pol. V**

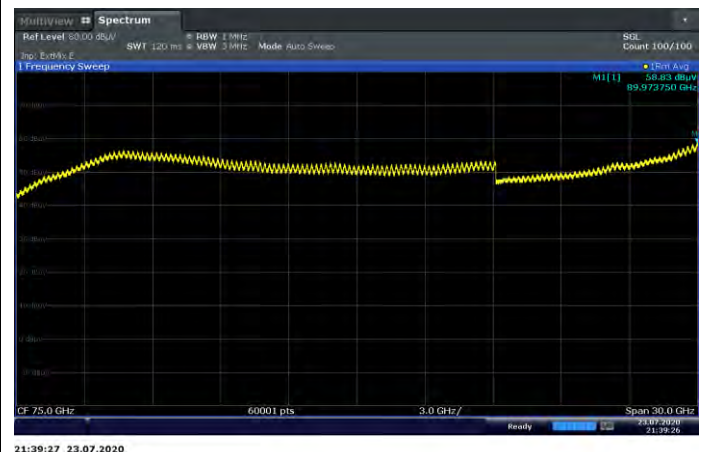




**Antenna 0(K patch), n260 50 MHz 1 CC SISO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

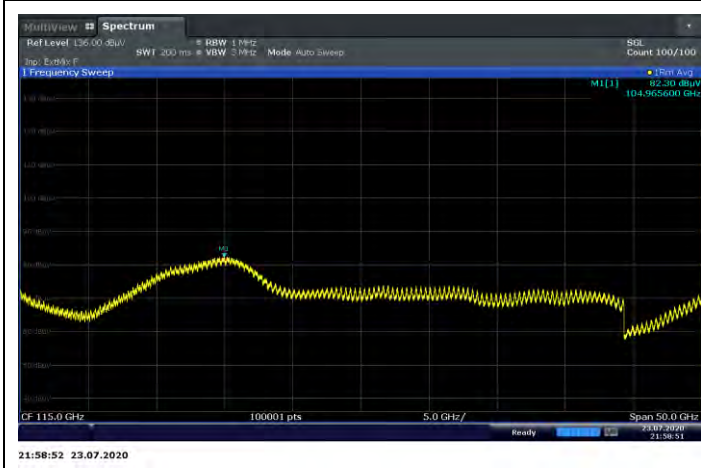


**Low Channel Pol. V**

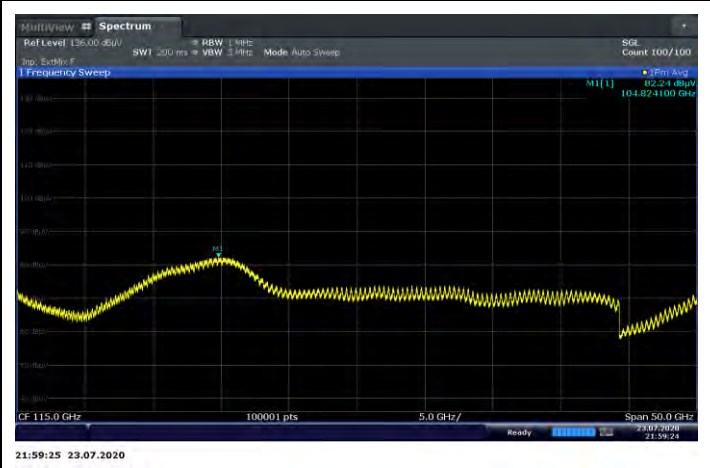


**Middle Channel Pol. H**

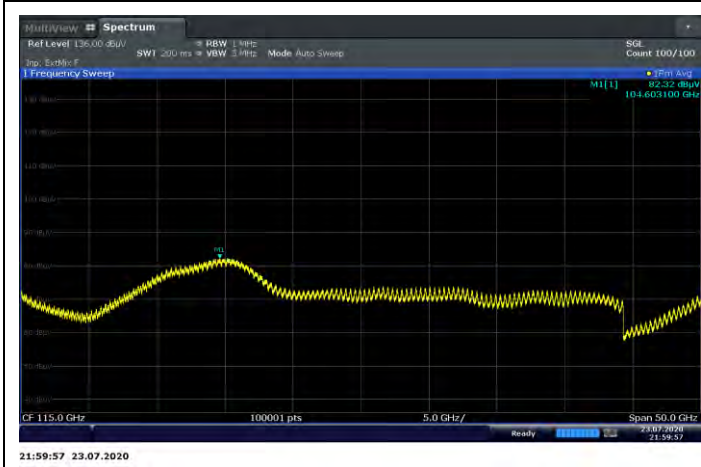


**Middle Channel Pol. V**

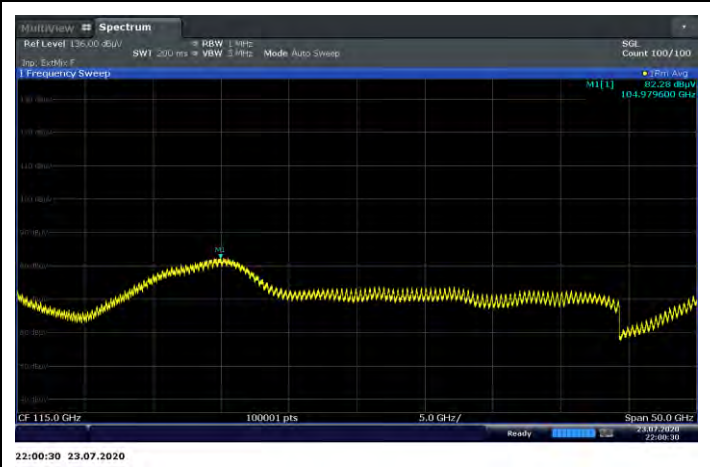

**High Channel Pol. H**

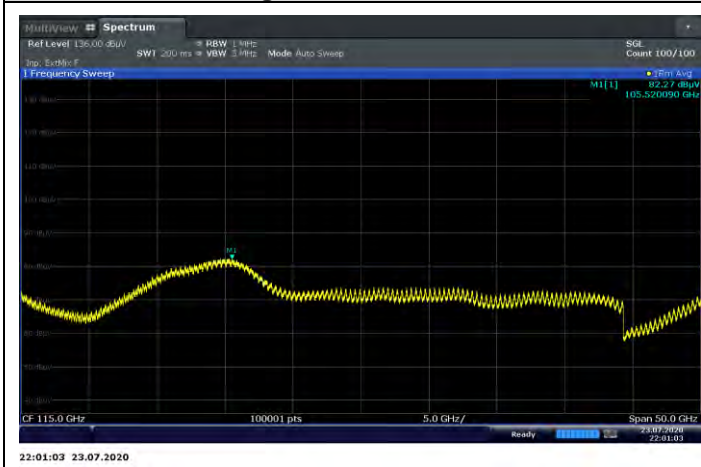


**High Channel Pol. V**

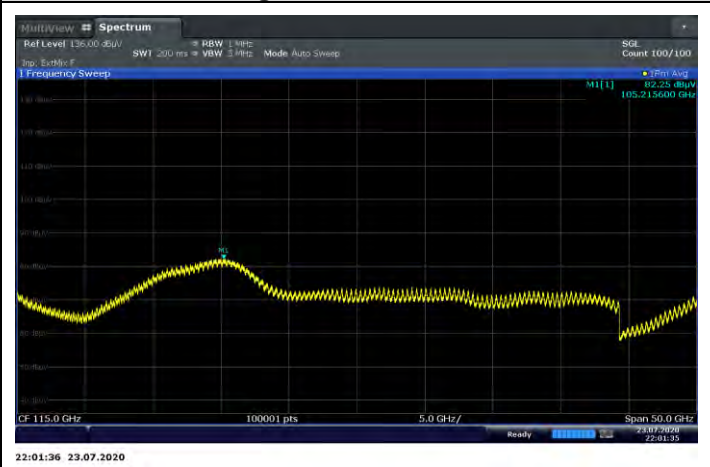


**Antenna 0(K patch), n260 50 MHz 1 CC MIMO [90 GHz ~ 140 GHz]**

**Low Channel Pol. H**

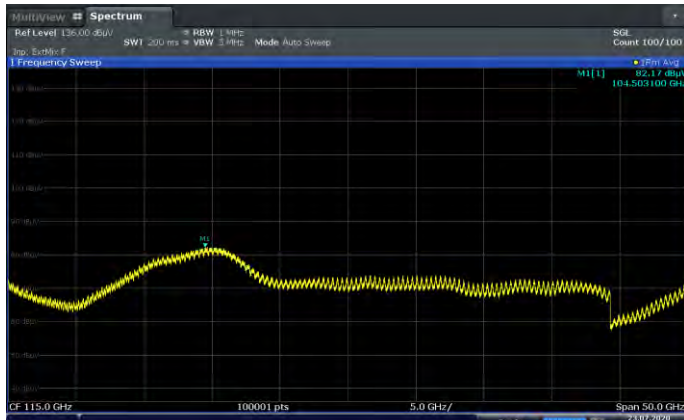


22:02:09 23.07.2020

**Low Channel Pol. V**

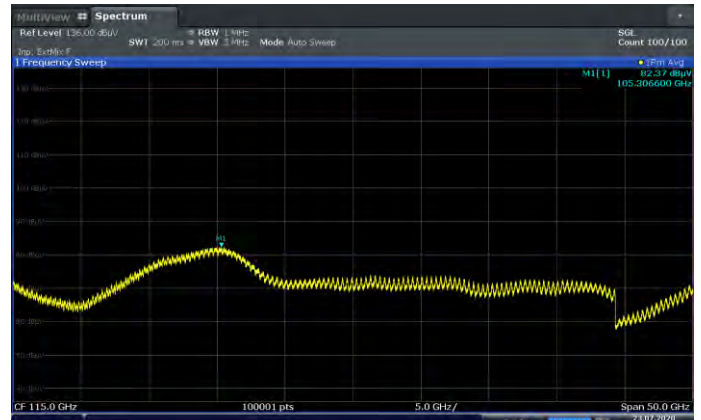


22:02:42 23.07.2020

**Middle Channel Pol. H**

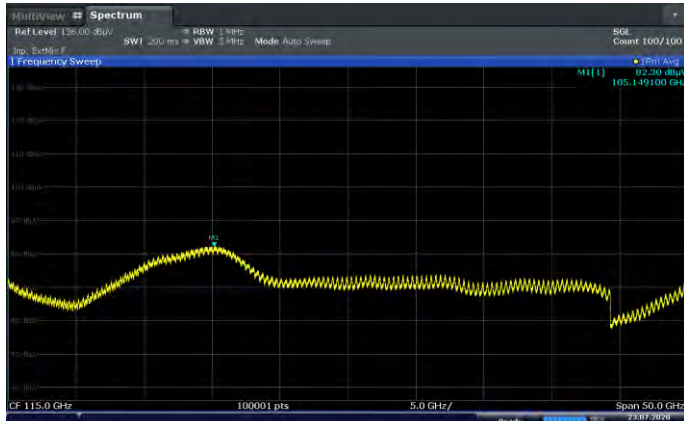


22:03:15 23.07.2020

**Middle Channel Pol. V**

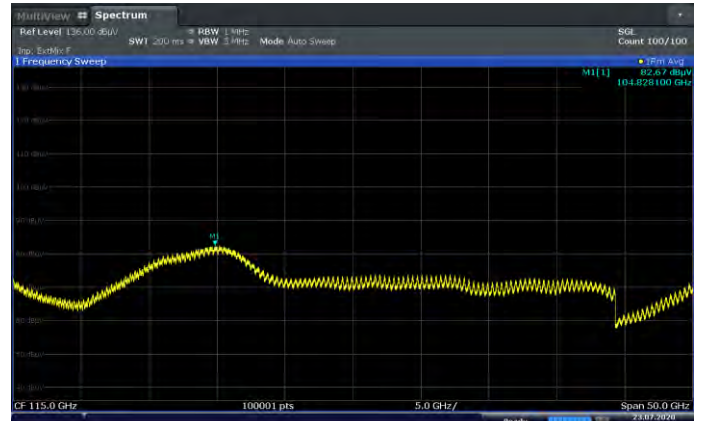


22:03:48 23.07.2020

**High Channel Pol. H**

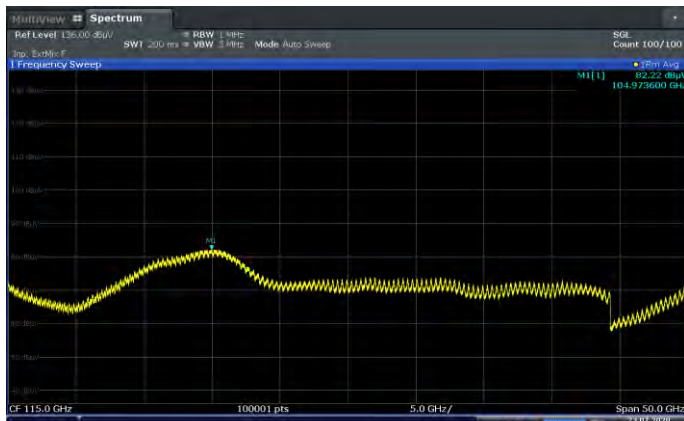

22:04:20 23.07.2020


**High Channel Pol. V**

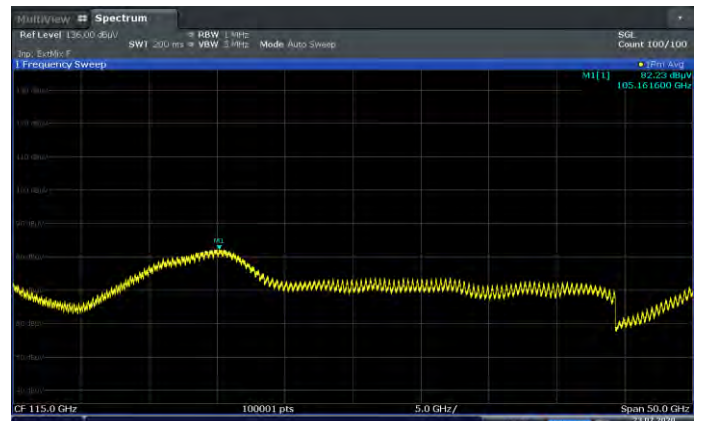


22:04:53 23.07.2020

**Antenna 0(K patch), n260 100 MHz 1 CC SISO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

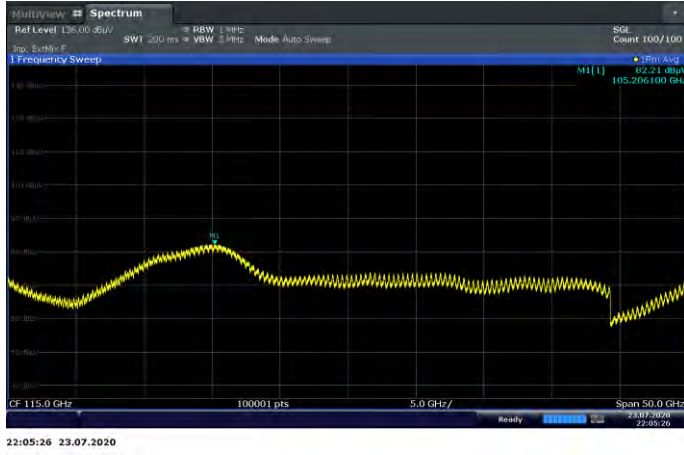


**Low Channel Pol. V**

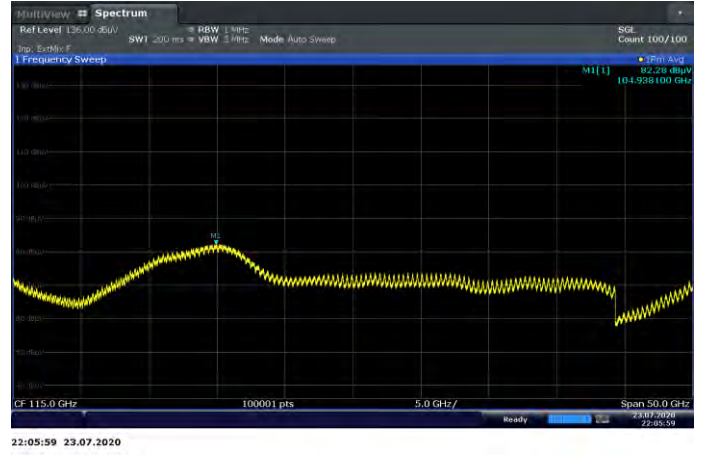


**Middle Channel Pol. H**

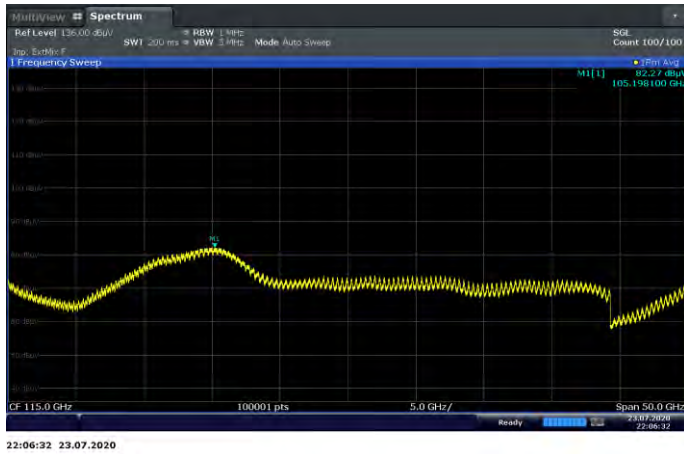


**Middle Channel Pol. V**

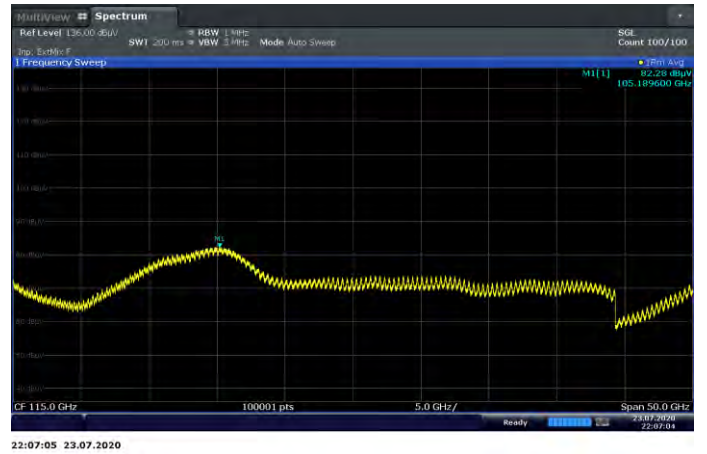

**High Channel Pol. H**

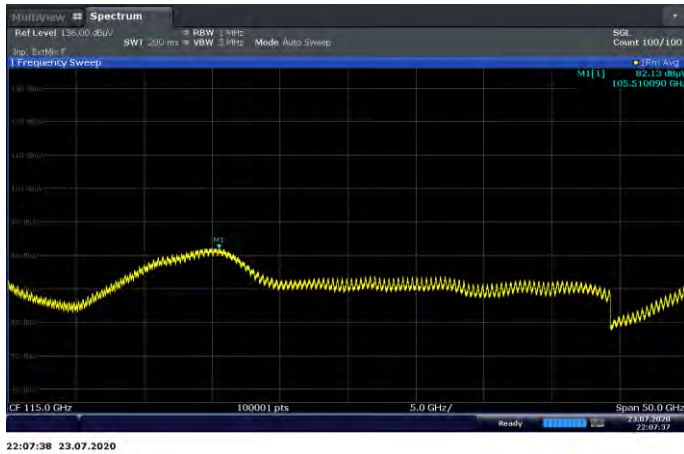


**High Channel Pol. V**

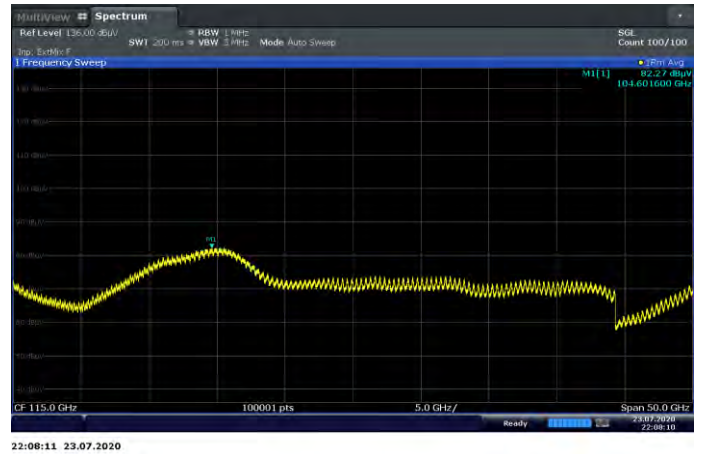




**Antenna 0(K patch), n260 100 MHz 1 CC MIMO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

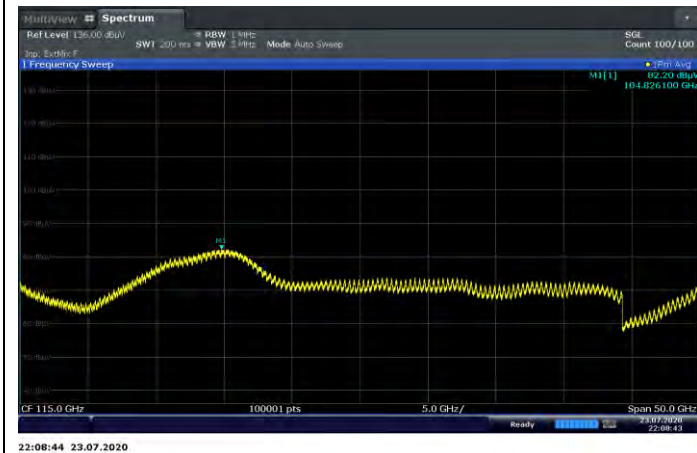


**Low Channel Pol. V**

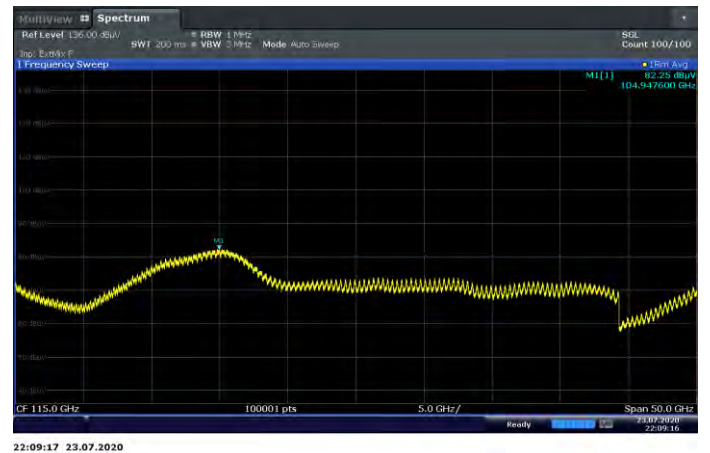


**Middle Channel Pol. H**

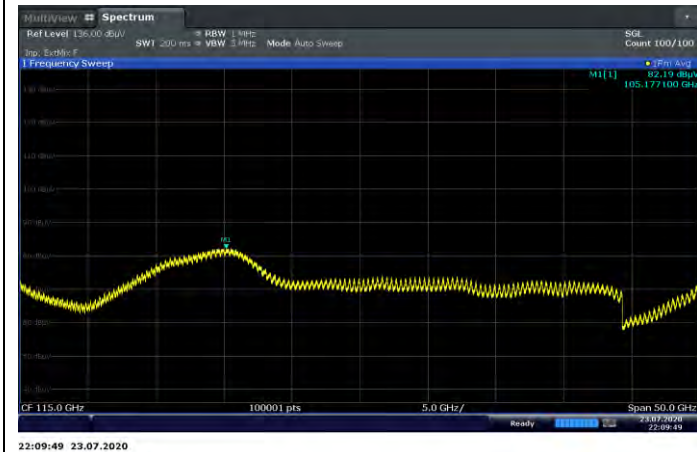


**Middle Channel Pol. V**

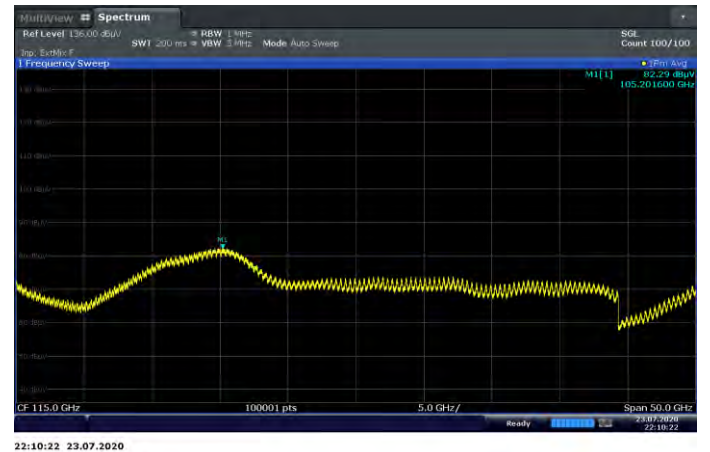

**High Channel Pol. H**

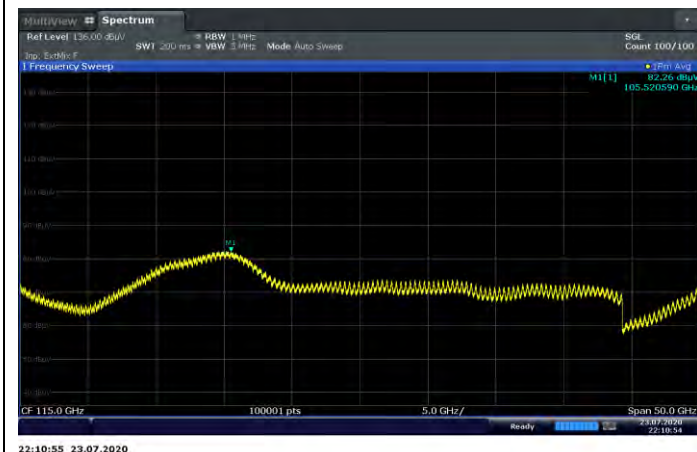

**High Channel Pol. V**

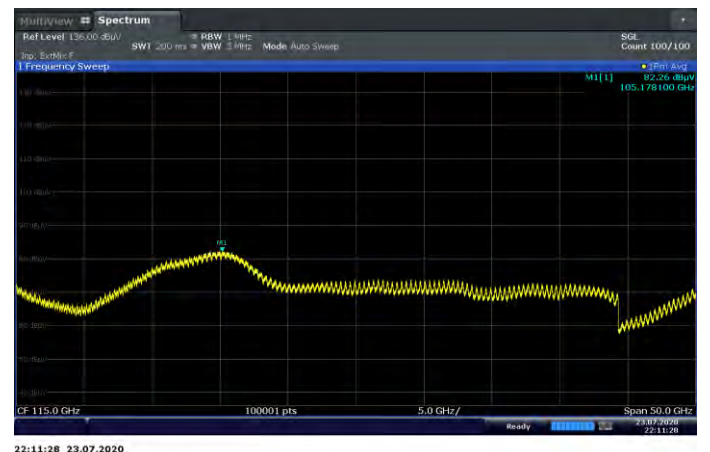


**Antenna 1(L patch), n260 50 MHz 1 CC SISO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**




**Low Channel Pol. V**

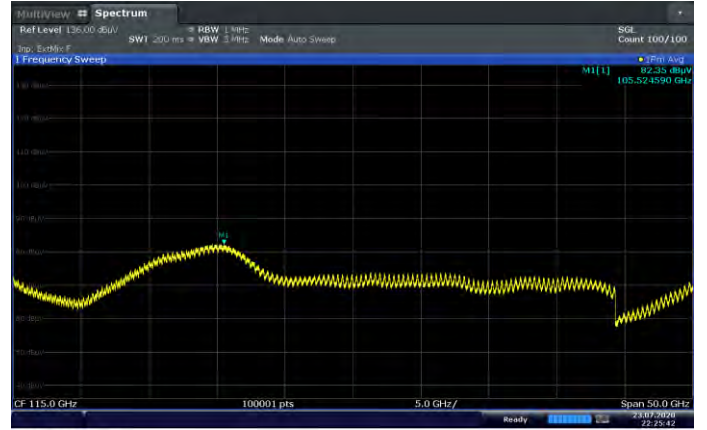


**Middle Channel Pol. H**

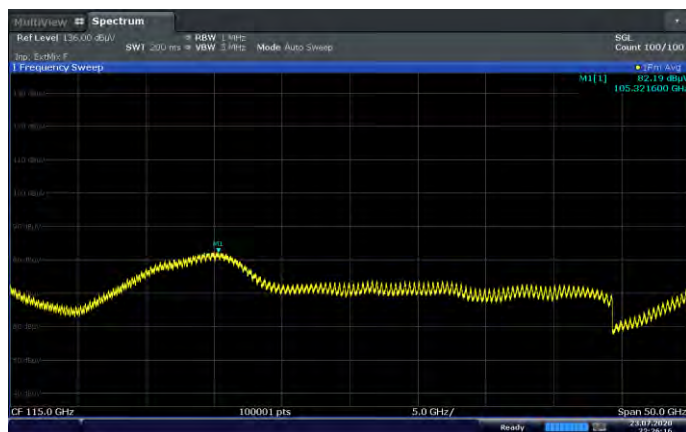


**Middle Channel Pol. V**

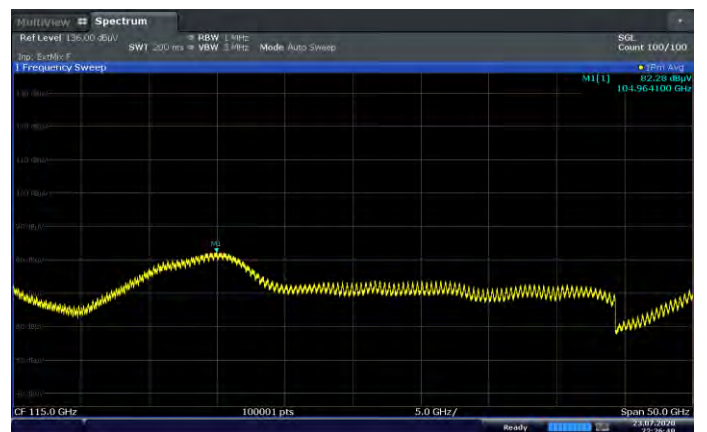

**High Channel Pol. H**

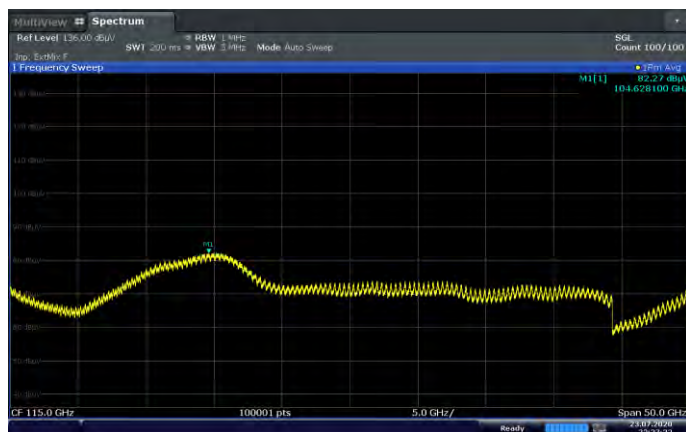


**High Channel Pol. V**

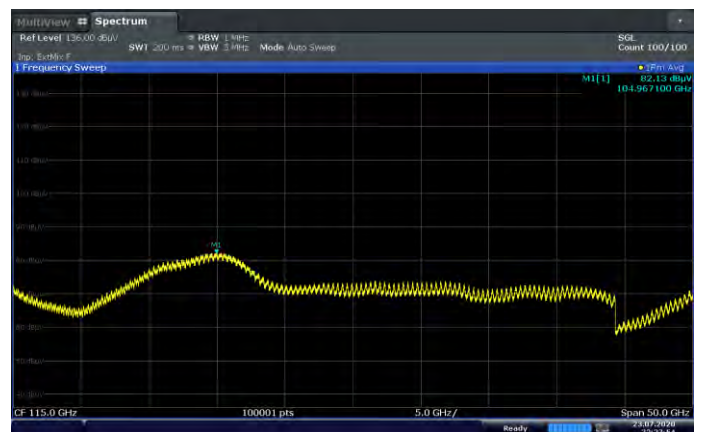


**Antenna 1(L patch), n260 50 MHz 1 CC MIMO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

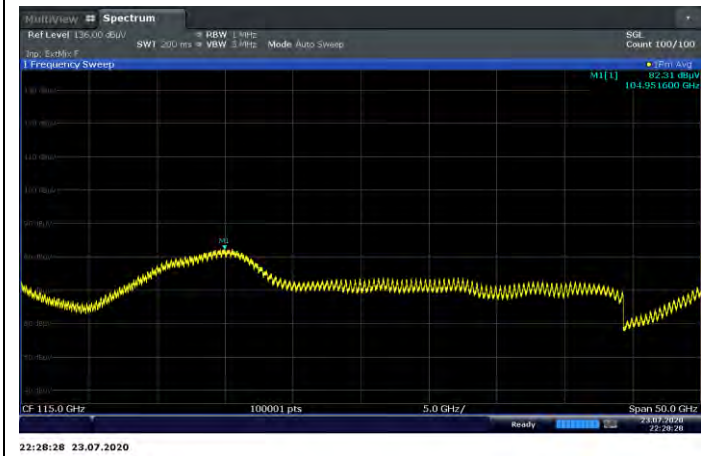


**Low Channel Pol. V**

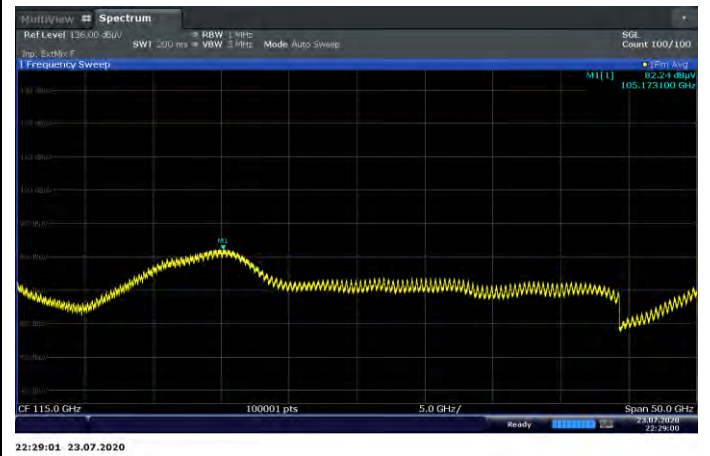


**Middle Channel Pol. H**

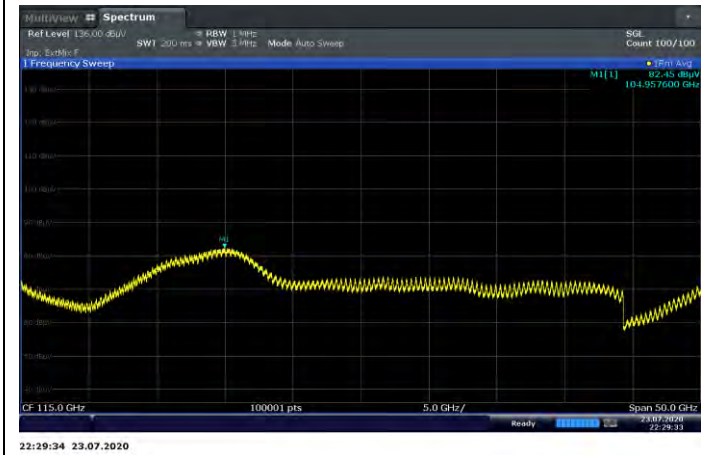


**Middle Channel Pol. V**

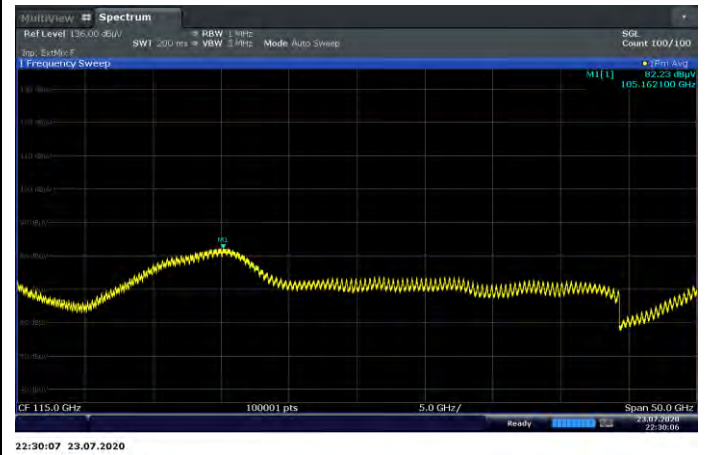

**High Channel Pol. H**

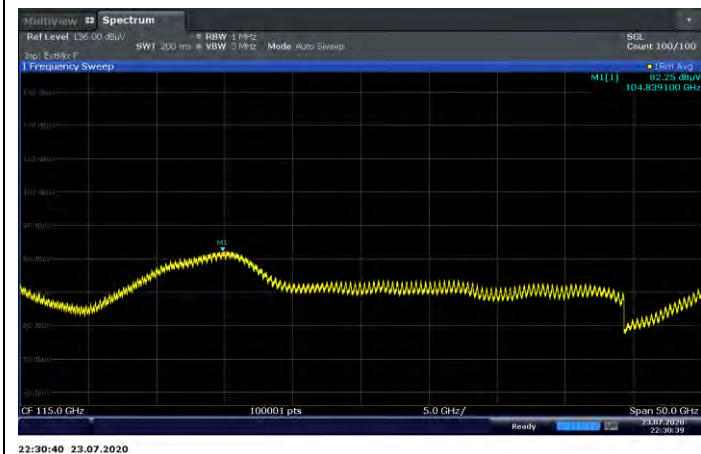


**High Channel Pol. V**

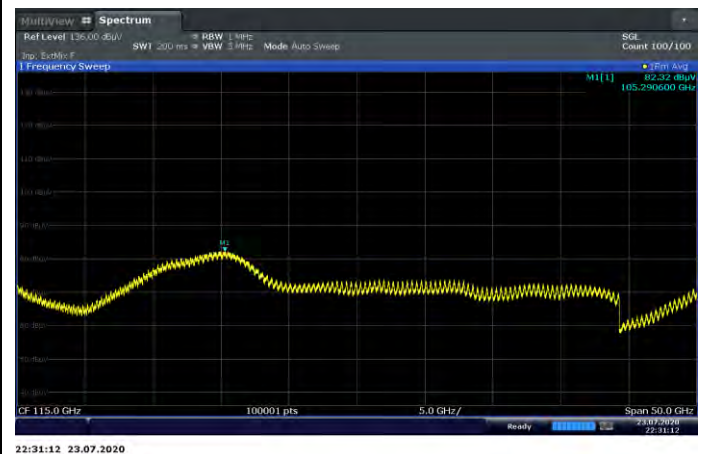




**Antenna 1(L patch), n260 100 MHz 1 CC SISO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

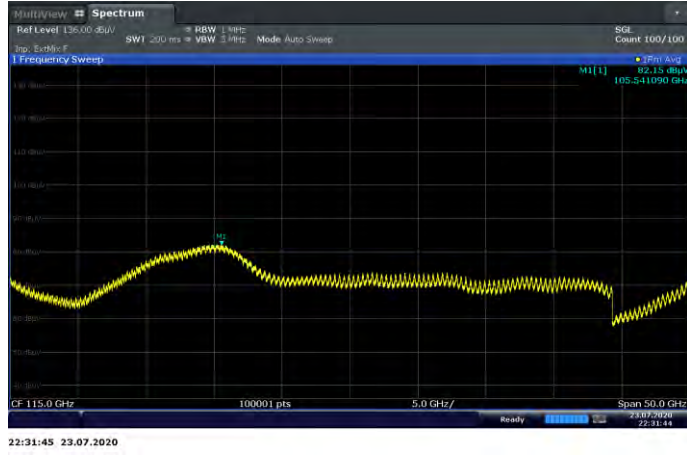


**Low Channel Pol. V**

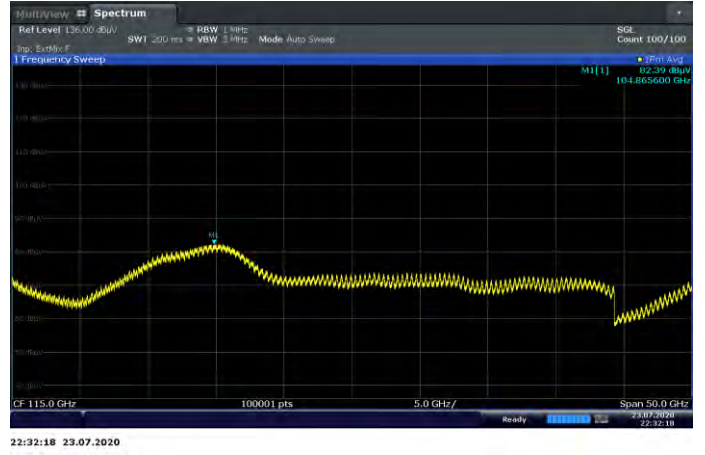


**Middle Channel Pol. H**

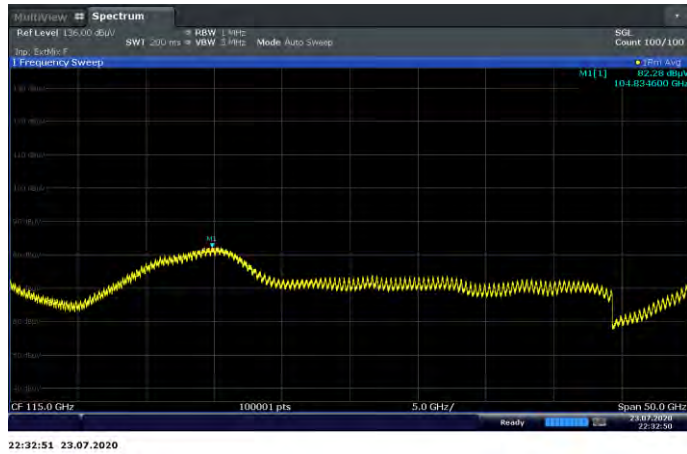


**Middle Channel Pol. V**

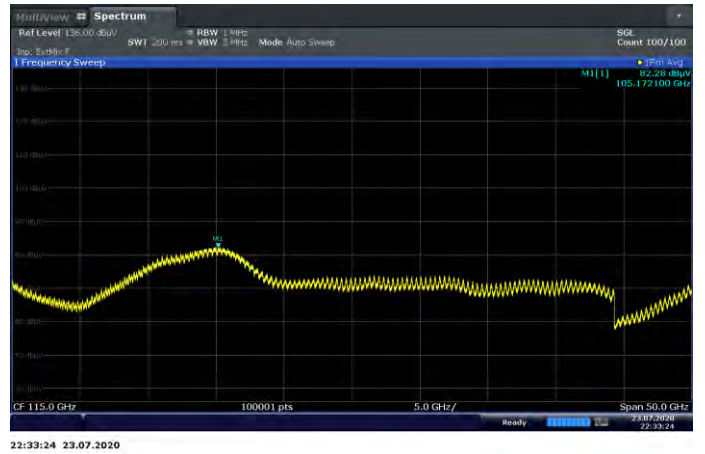

**High Channel Pol. H**

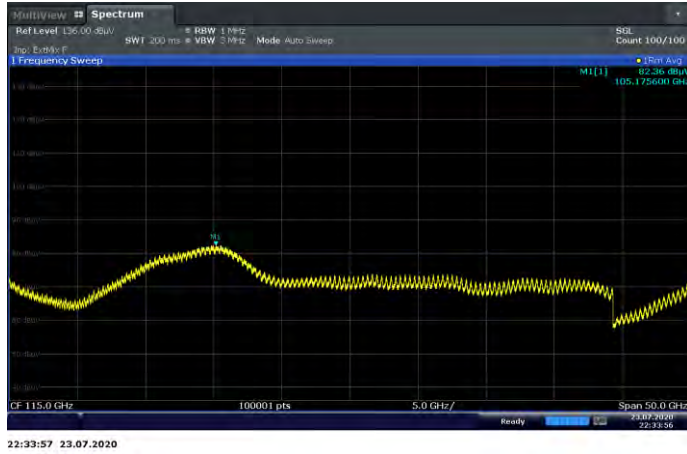


**High Channel Pol. V**

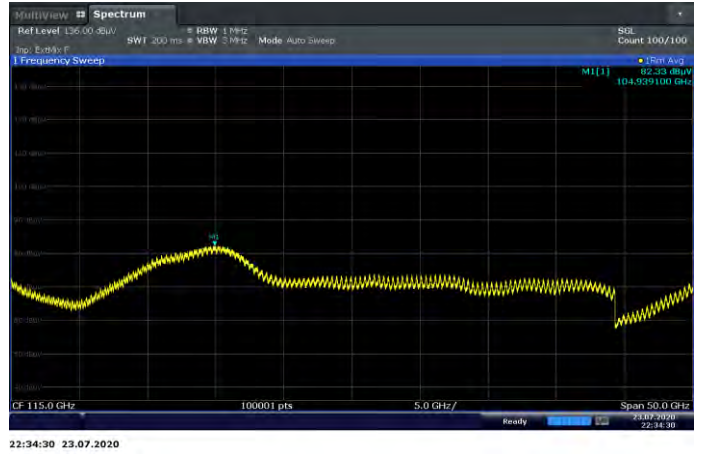


**Antenna 1(L patch), n260 100 MHz 1 CC MIMO [90 GHz ~ 140 GHz]**


**Low Channel Pol. H**

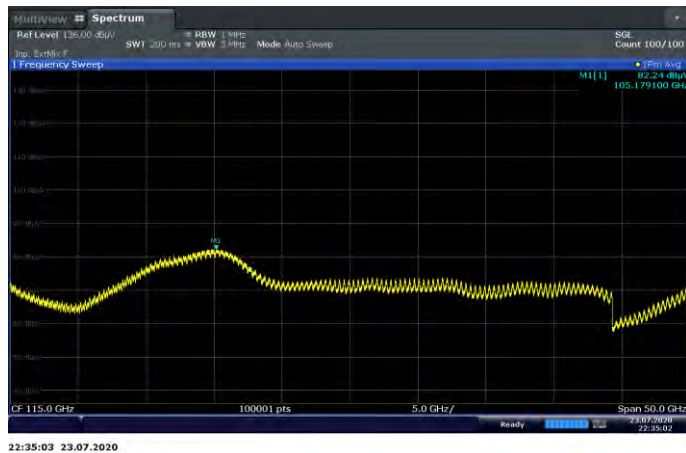


**Low Channel Pol. V**

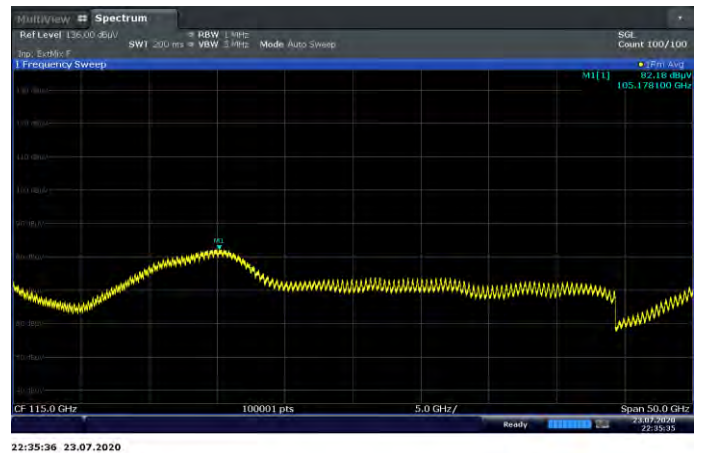


**Middle Channel Pol. H**

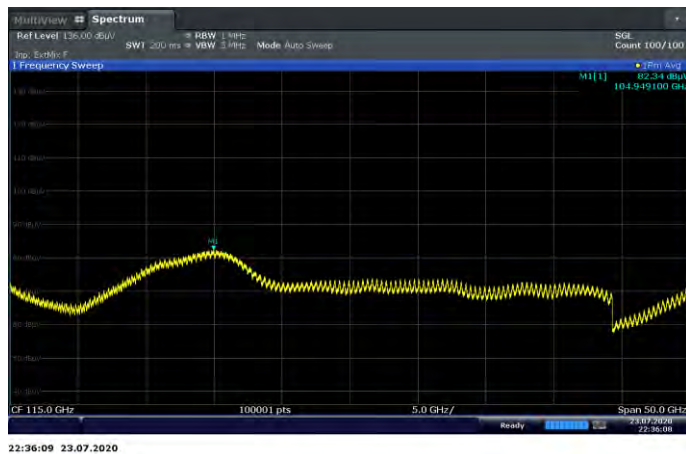


**Middle Channel Pol. V**

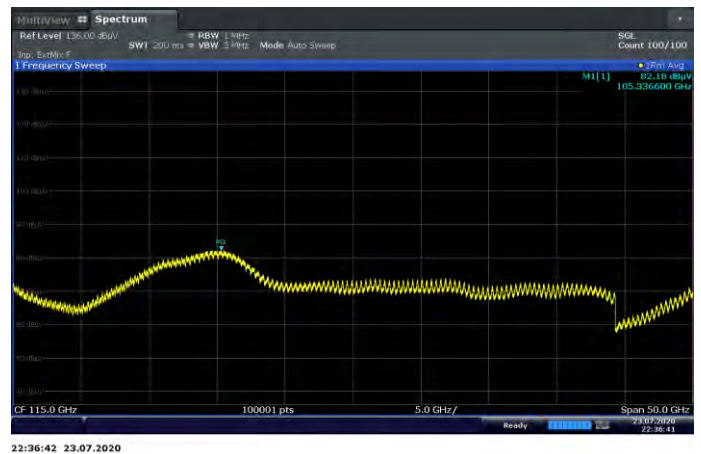

**High Channel Pol. H**

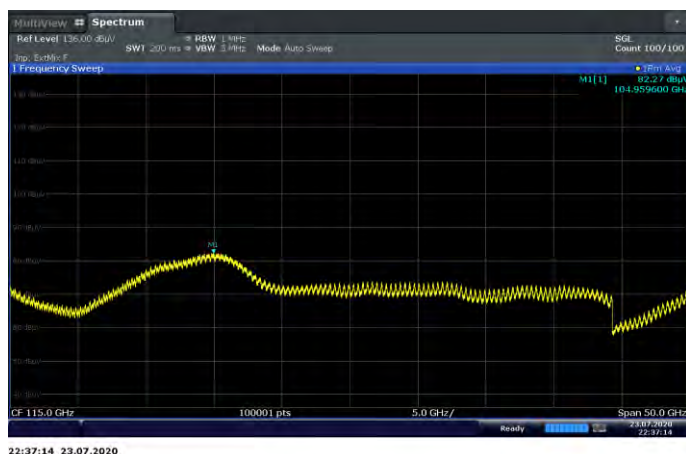


**High Channel Pol. V**

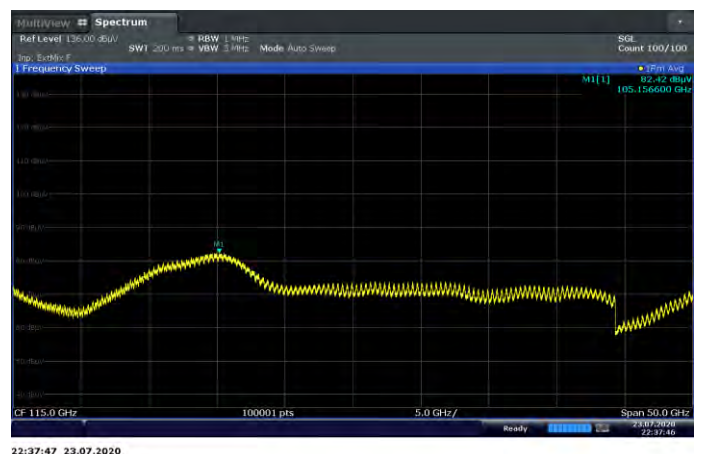


**Antenna 0(K patch), n260 50 MHz 1 CC SISO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

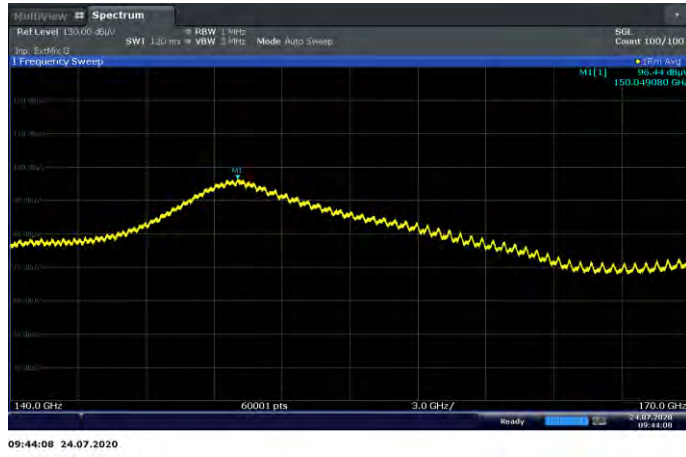


**Low Channel Pol. V**

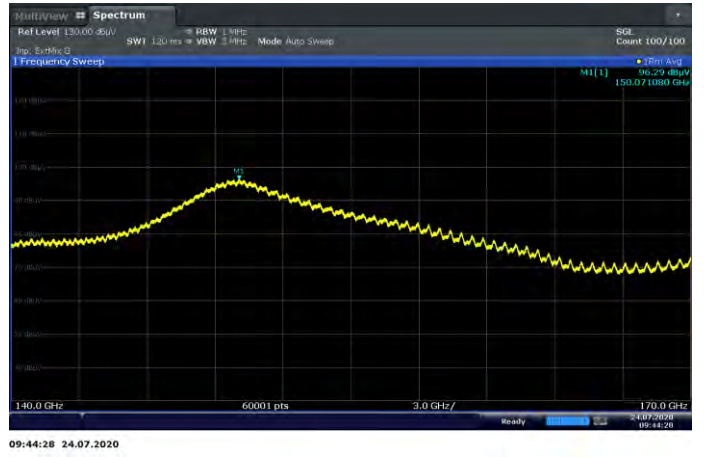


**Middle Channel Pol. H**

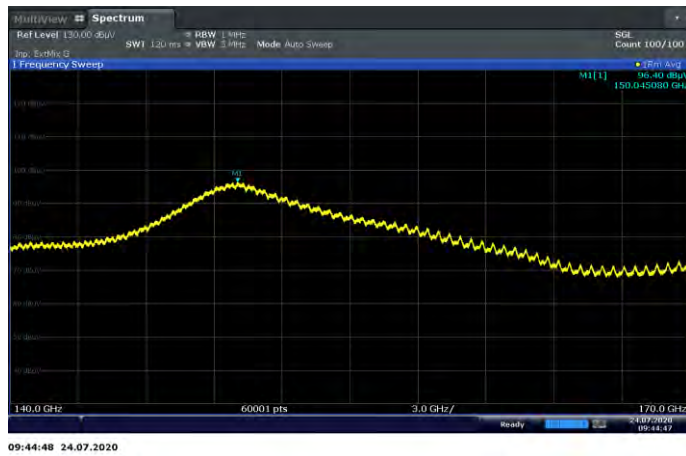


**Middle Channel Pol. V**

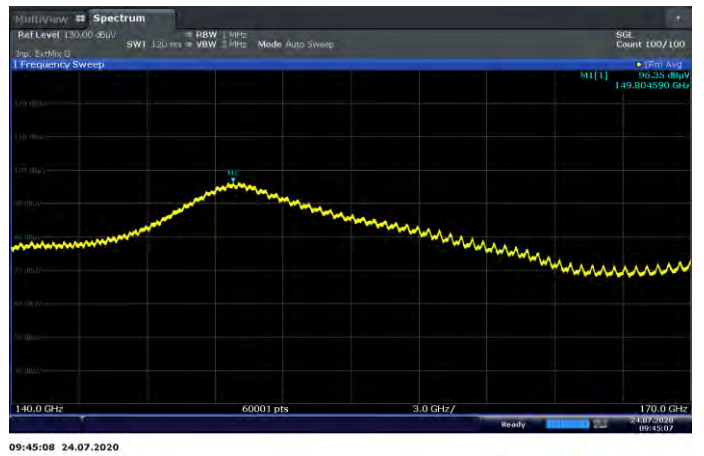

**High Channel Pol. H**

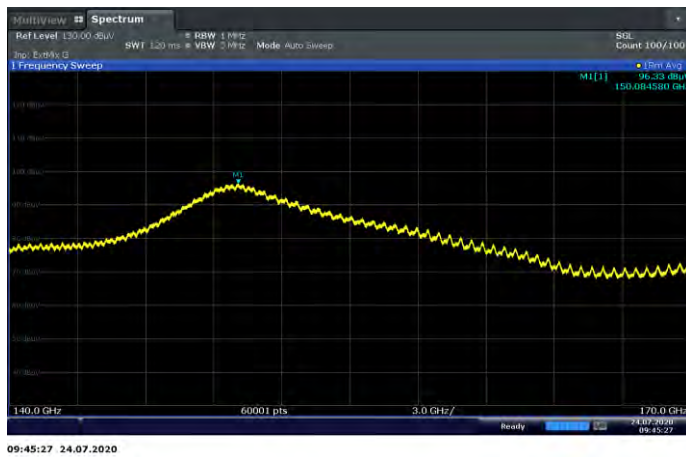


**High Channel Pol. V**

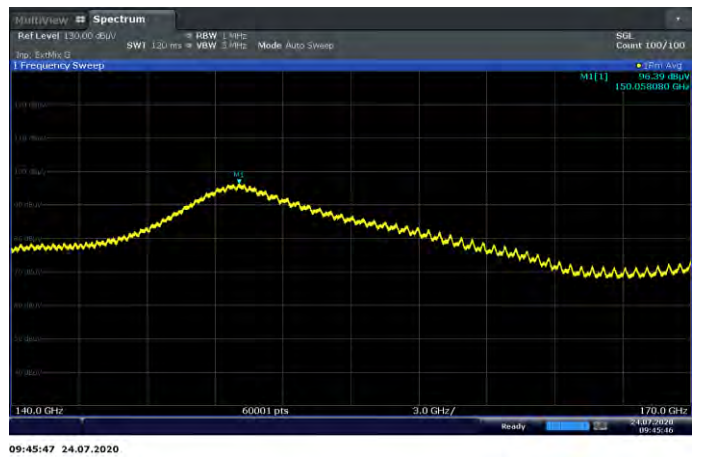




**Antenna 0(K patch), n260 50 MHz 1 CC MIMO [140 GHz ~ 170 GHz]**

**Low Channel Pol. H**

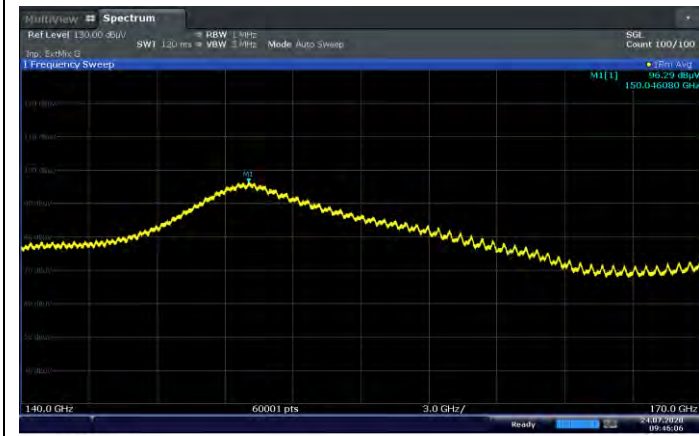


**Low Channel Pol. V**

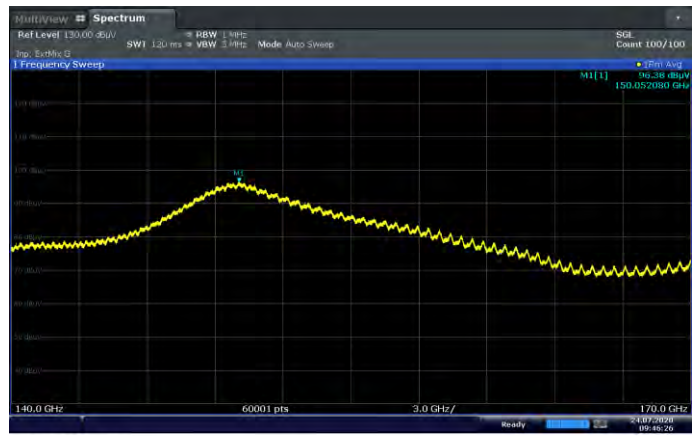


**Middle Channel Pol. H**




**Middle Channel Pol. V**

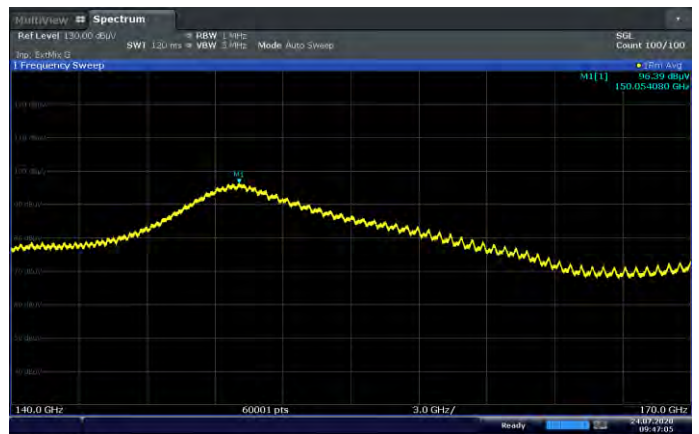

**High Channel Pol. H**

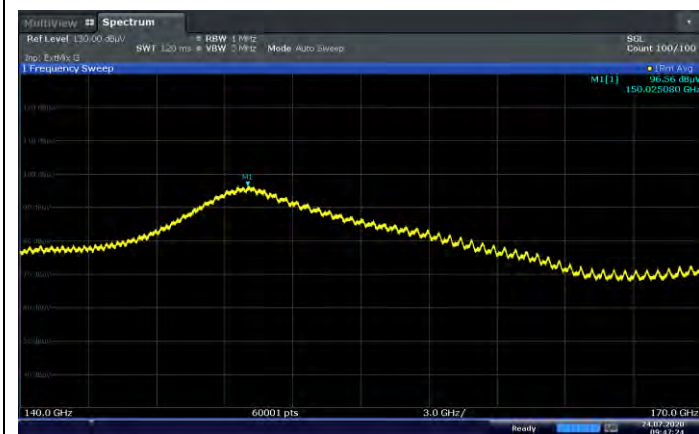


**High Channel Pol. V**

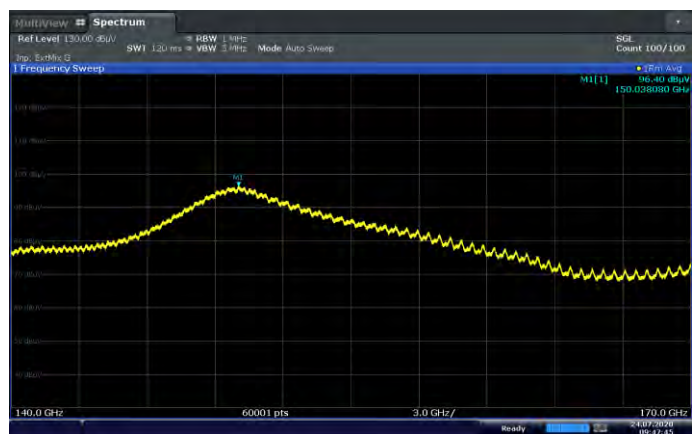


**Antenna 0(K patch), n260 100 MHz 1 CC SISO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

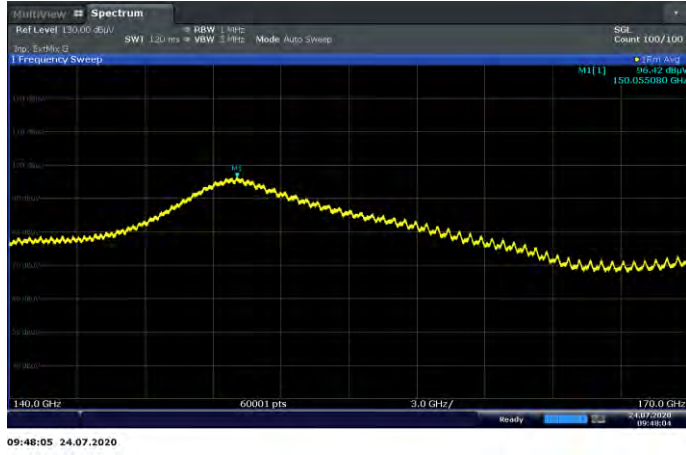


**Low Channel Pol. V**

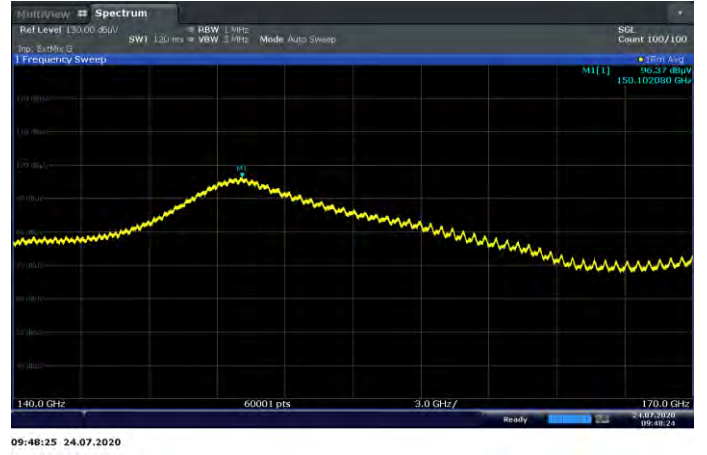


**Middle Channel Pol. H**

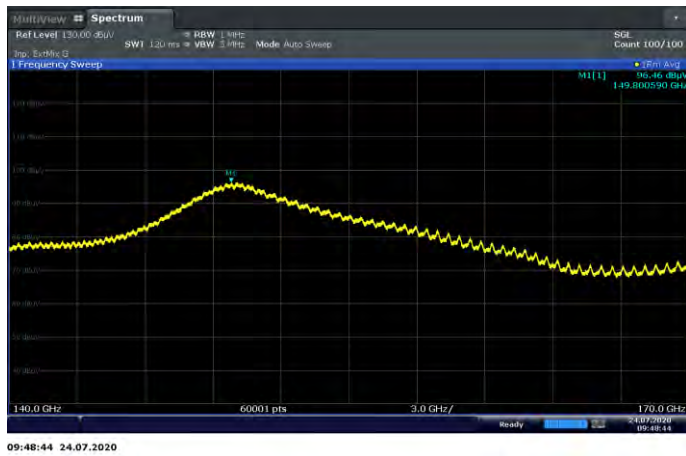


**Middle Channel Pol. V**

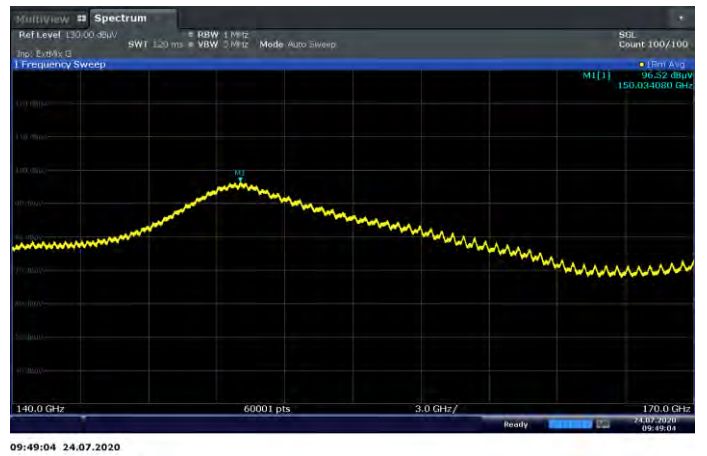

**High Channel Pol. H**

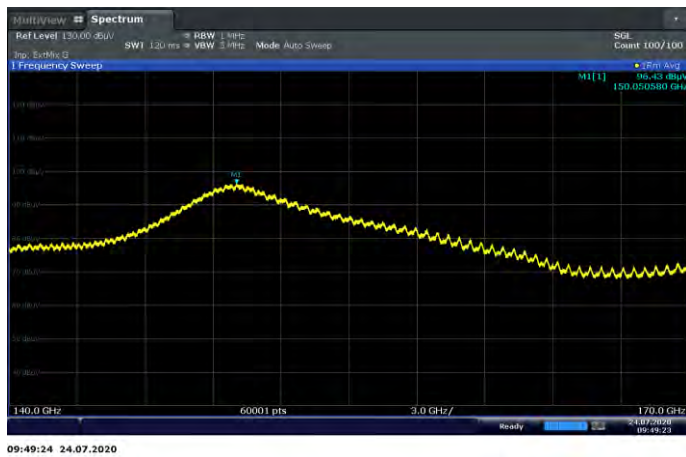


**High Channel Pol. V**

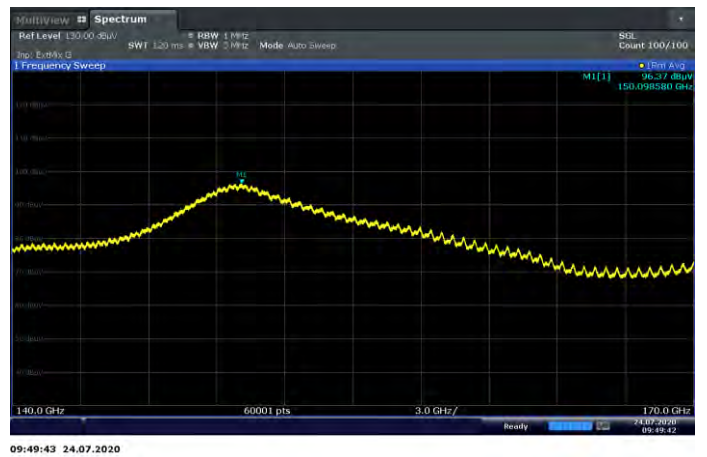


**Antenna 0(K patch), n260 100 MHz 1 CC MIMO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

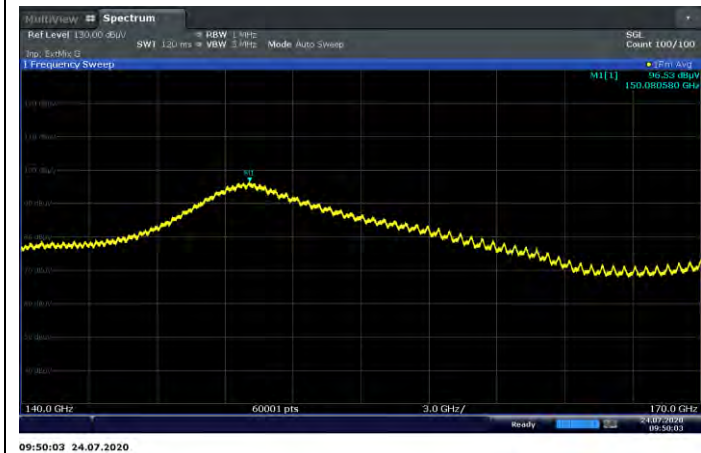


**Low Channel Pol. V**

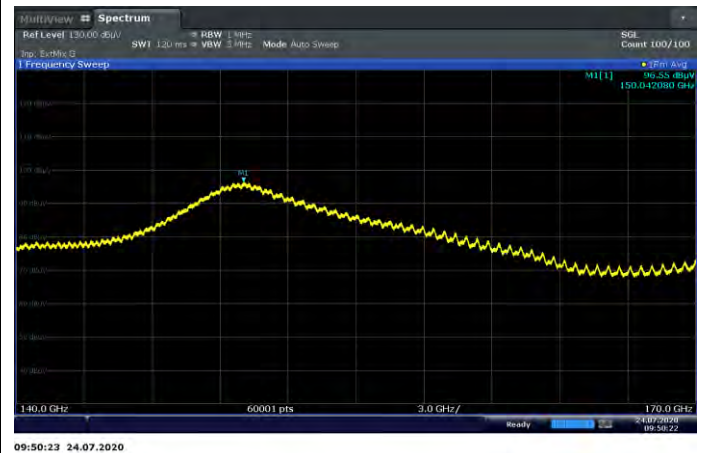


**Middle Channel Pol. H**

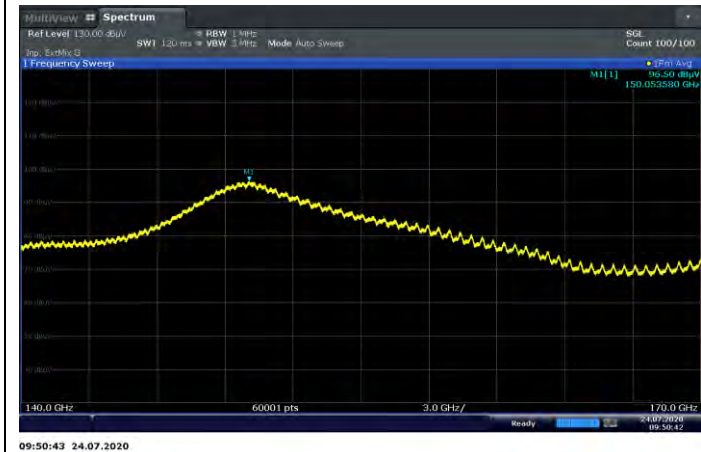


**Middle Channel Pol. V**

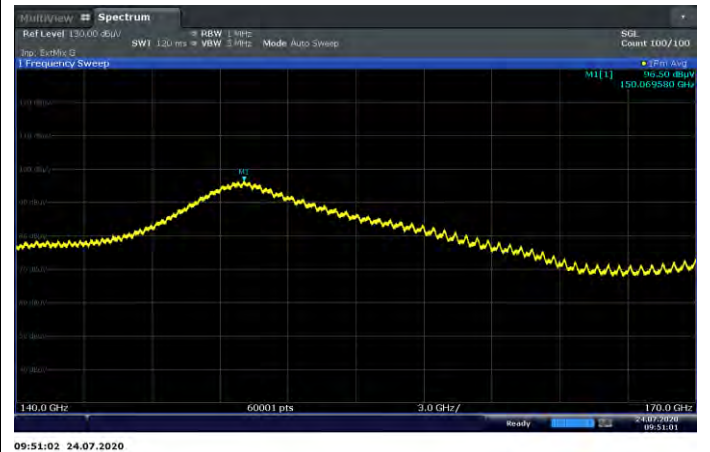

**High Channel Pol. H**

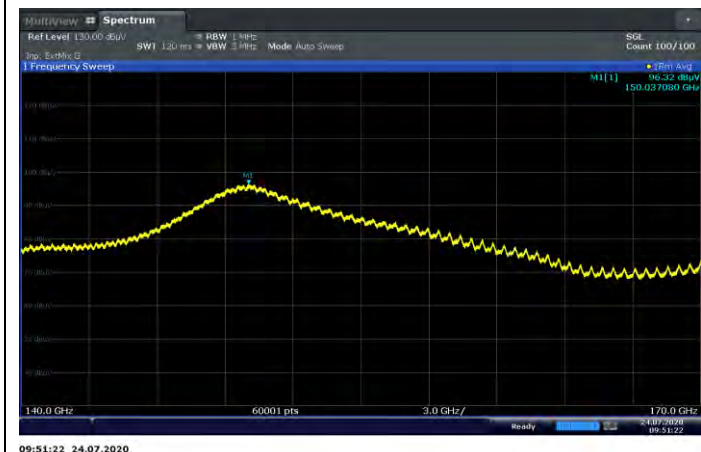


**High Channel Pol. V**

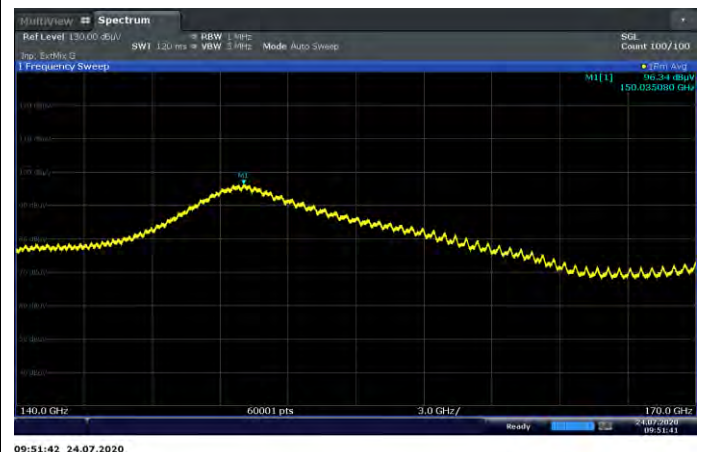




Antenna 1(L patch), n260 50 MHz 1 CC SISO [140 GHz ~ 170 GHz]


Low Channel Pol. H

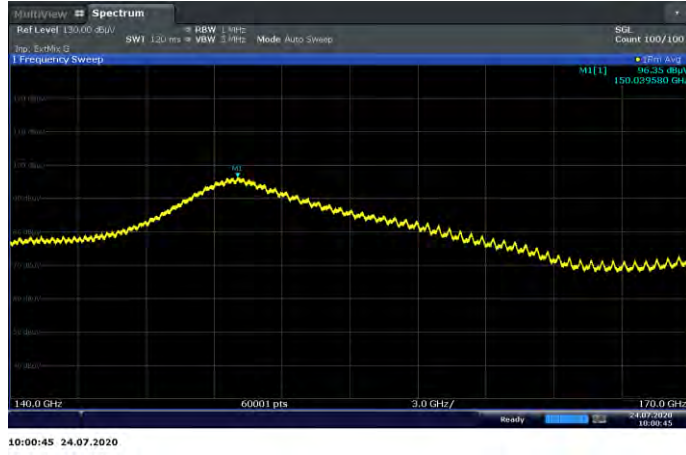


Low Channel Pol. V

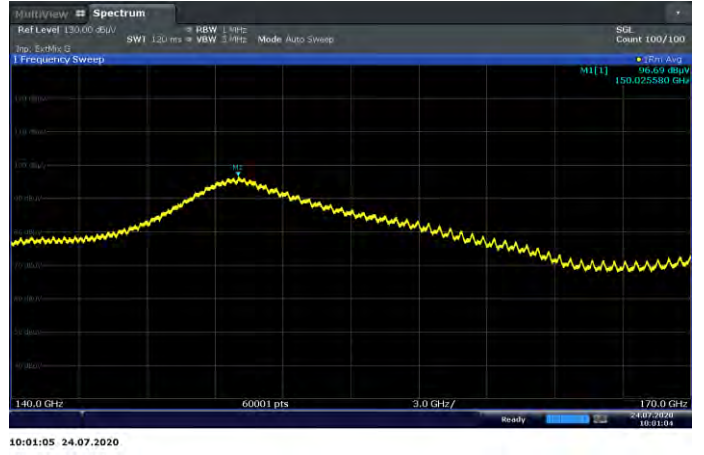


Middle Channel Pol. H

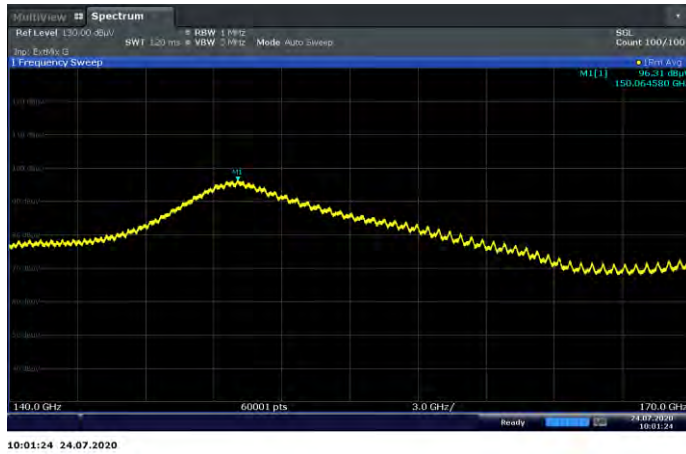


Middle Channel Pol. V

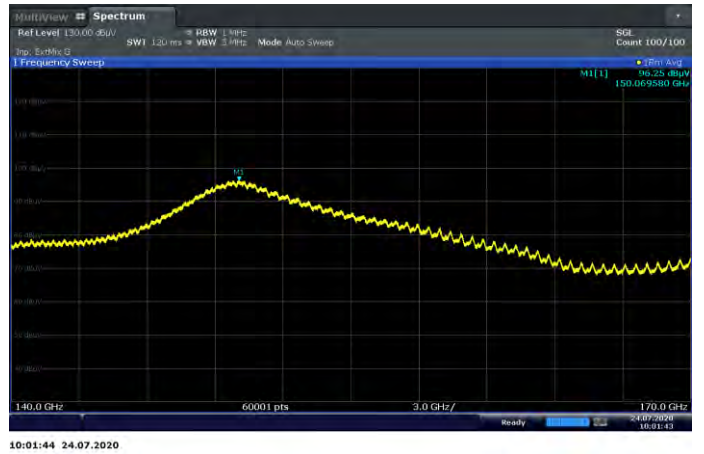

High Channel Pol. H

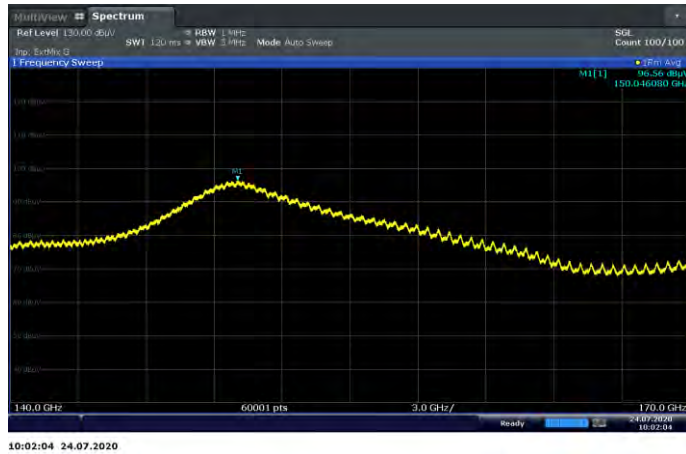


High Channel Pol. V

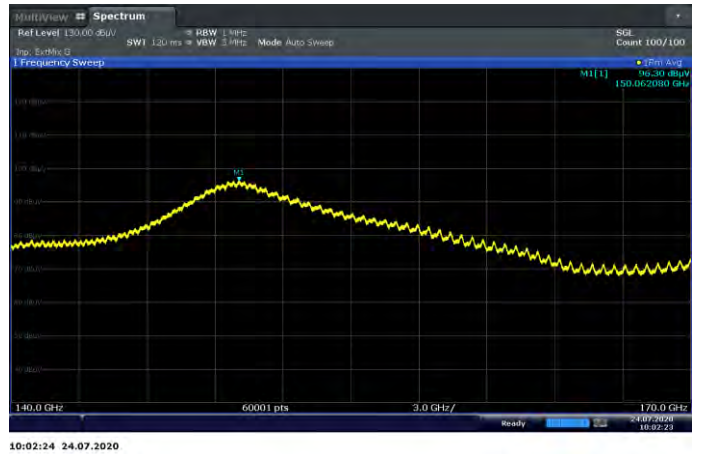


**Antenna 1(L patch), n260 50 MHz 1 CC MIMO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

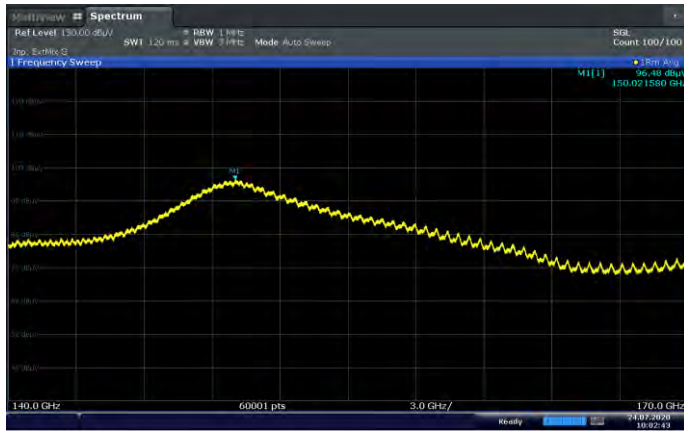


**Low Channel Pol. V**

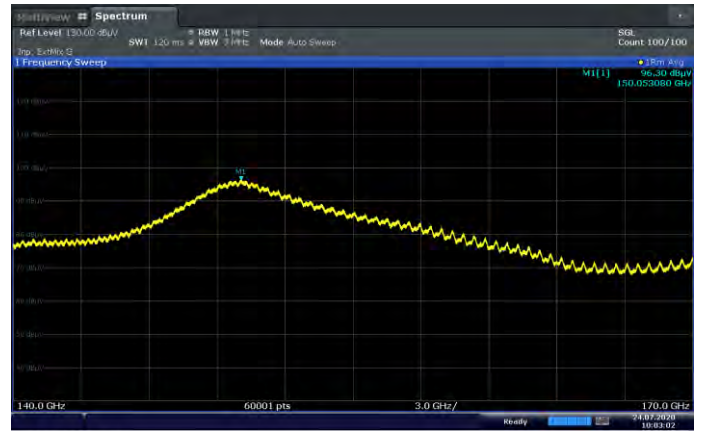


**Middle Channel Pol. H**

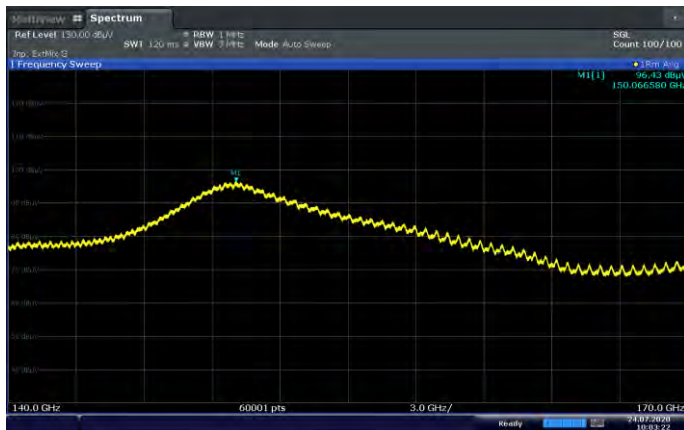


**Middle Channel Pol. V**

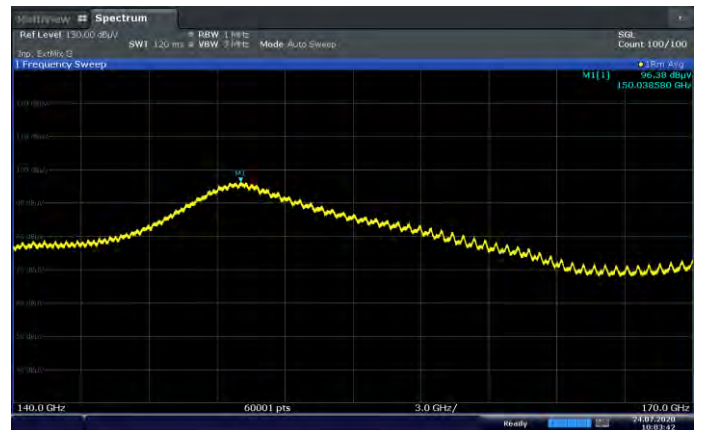

**High Channel Pol. H**

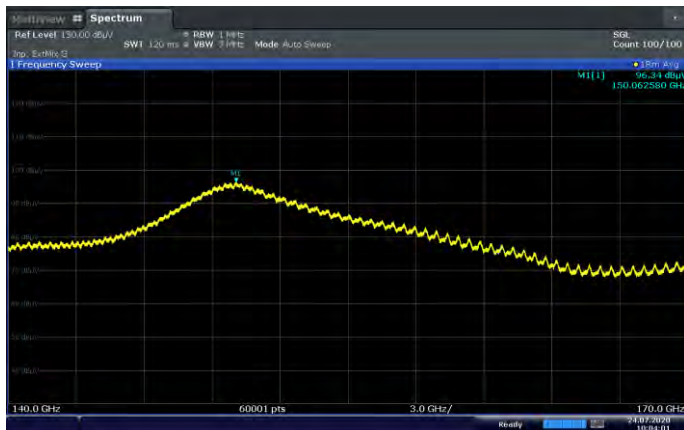


**High Channel Pol. V**

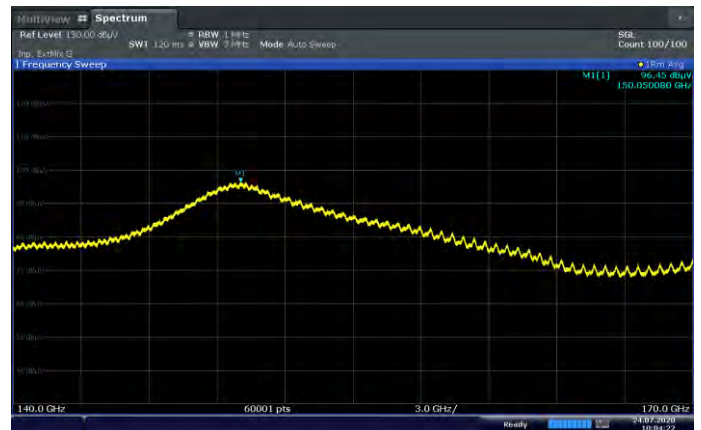


**Antenna 1(L patch), n260 100 MHz 1 CC SISO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

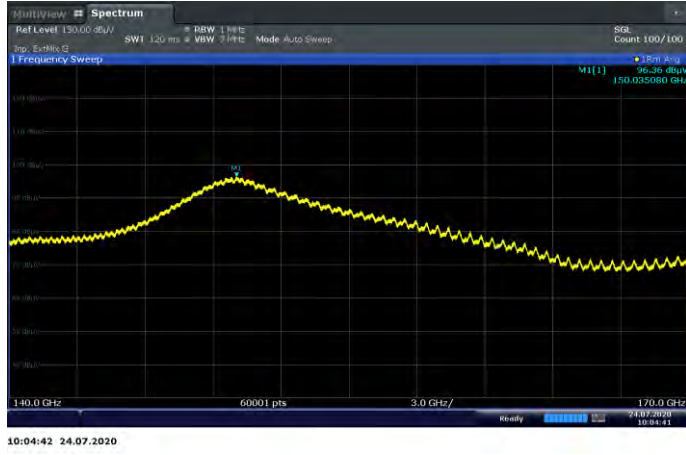


**Low Channel Pol. V**

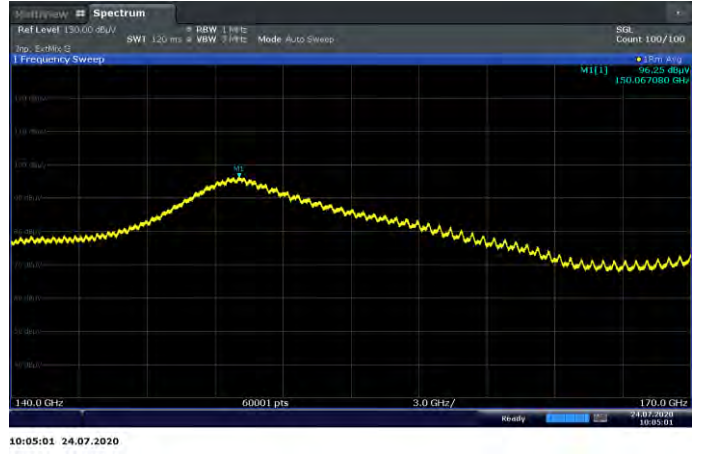


**Middle Channel Pol. H**

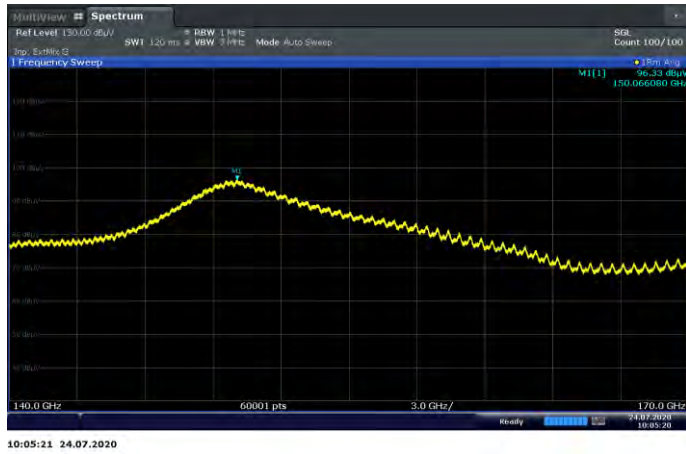


**Middle Channel Pol. V**

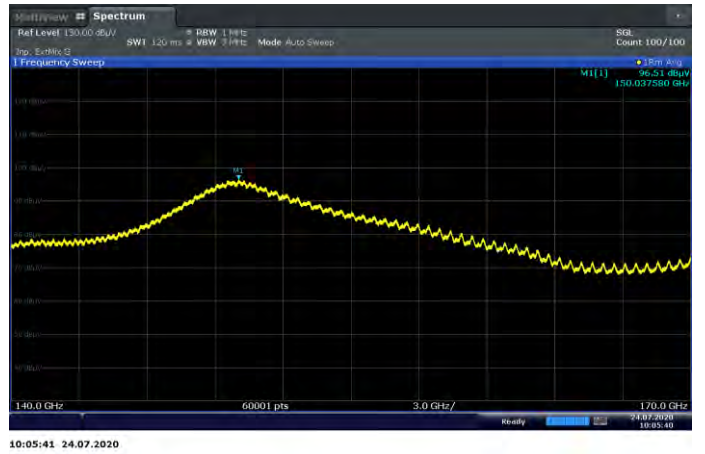

**High Channel Pol. H**

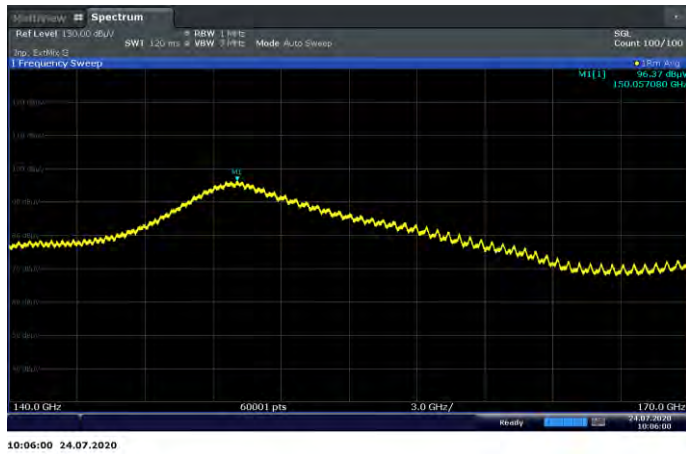


**High Channel Pol. V**

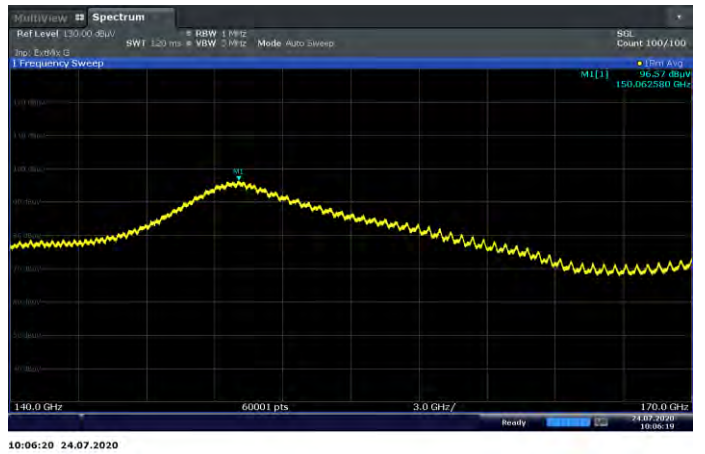




**Antenna 1(L patch), n260 100 MHz 1 CC MIMO [140 GHz ~ 170 GHz]**


**Low Channel Pol. H**

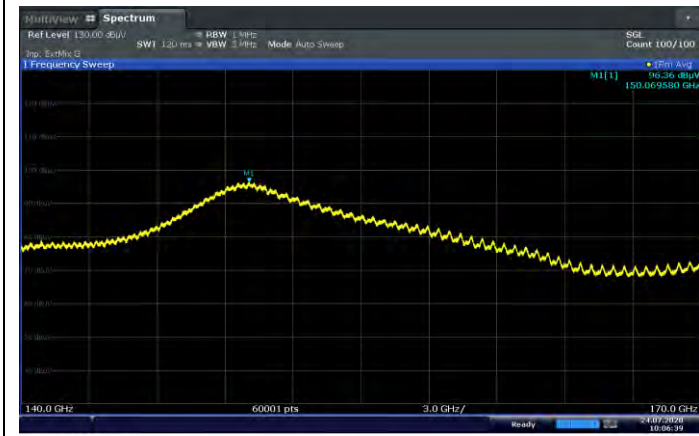

**Low Channel Pol. V**

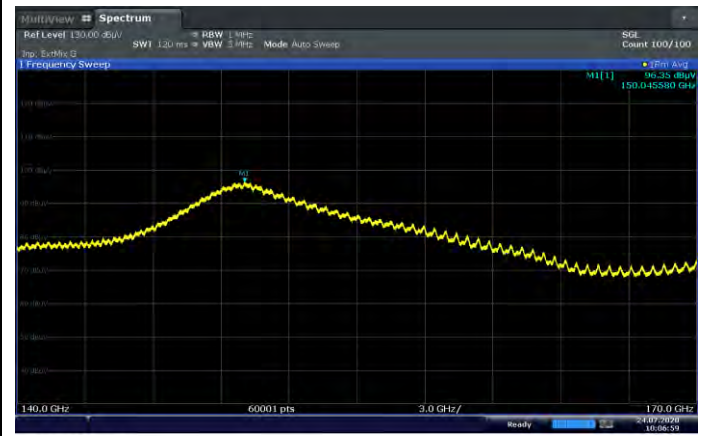


**Middle Channel Pol. H**

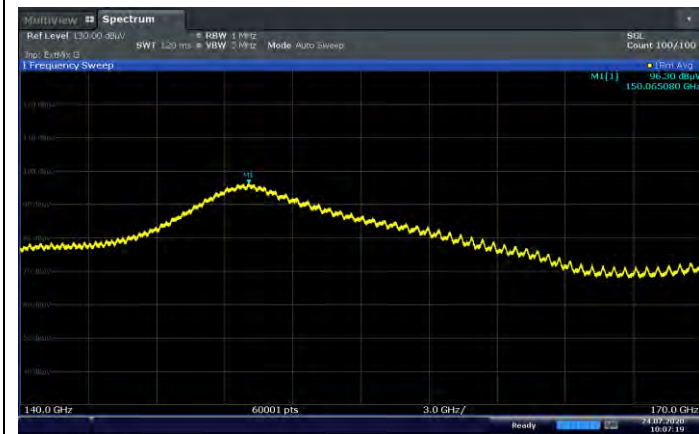


**Middle Channel Pol. V**



**High Channel Pol. H**

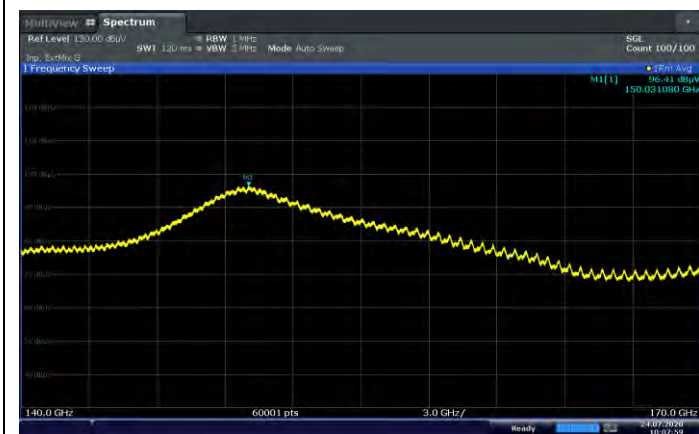


**High Channel Pol. V**

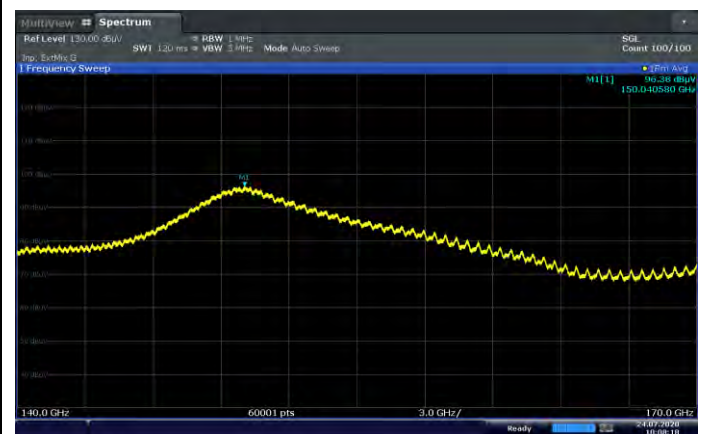


**Antenna 0(K patch), n260 50 MHz 1 CC SISO [170 GHz ~ 200 GHz]**

**Low Channel Pol. H**

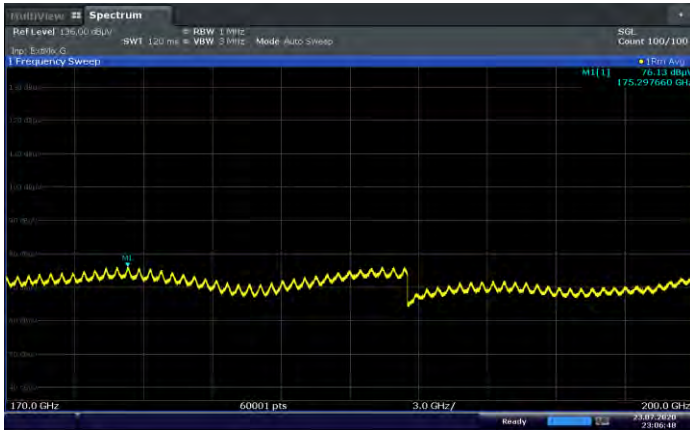


**Low Channel Pol. V**

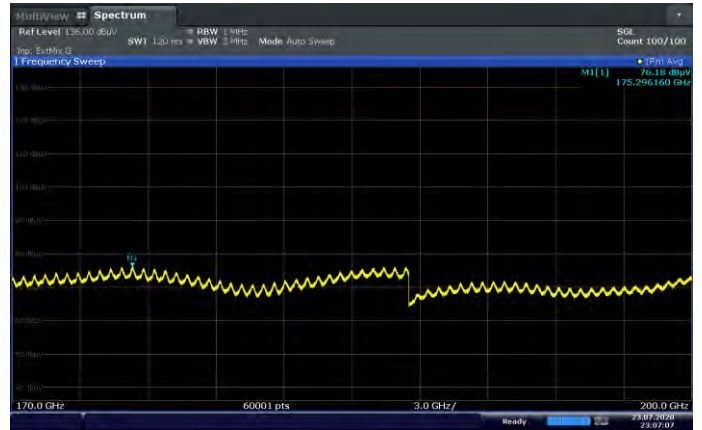


**Middle Channel Pol. H**




**Middle Channel Pol. V**

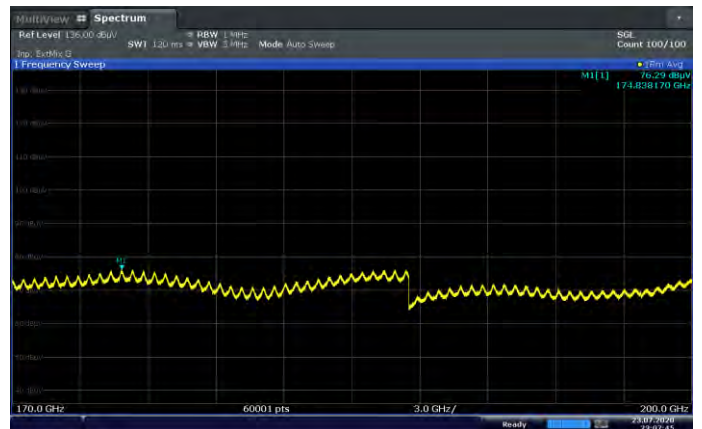

**High Channel Pol. H**

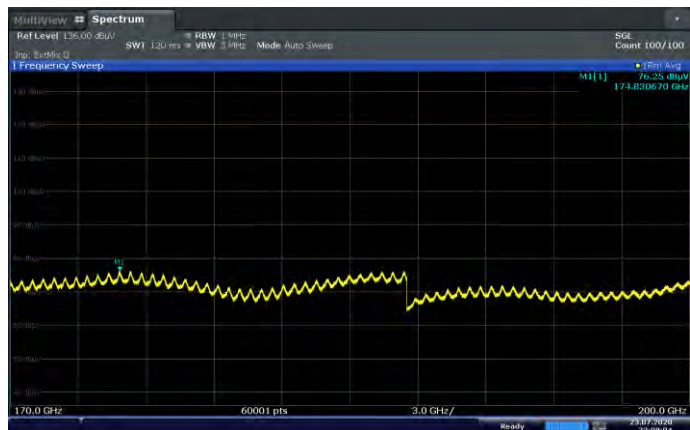


**High Channel Pol. V**

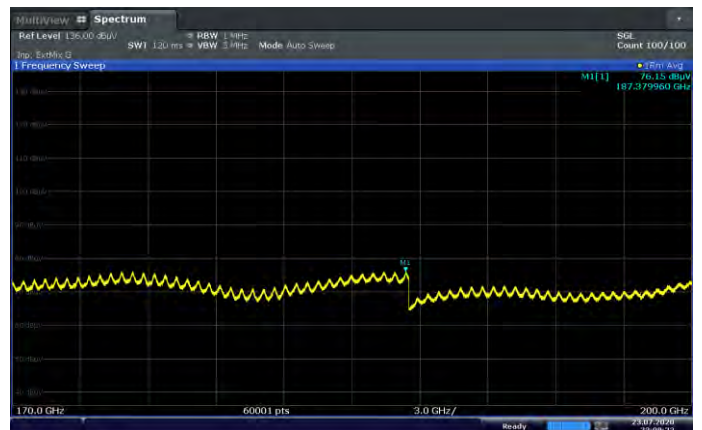


**Antenna 0(K patch), n260 50 MHz 1 CC MIMO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

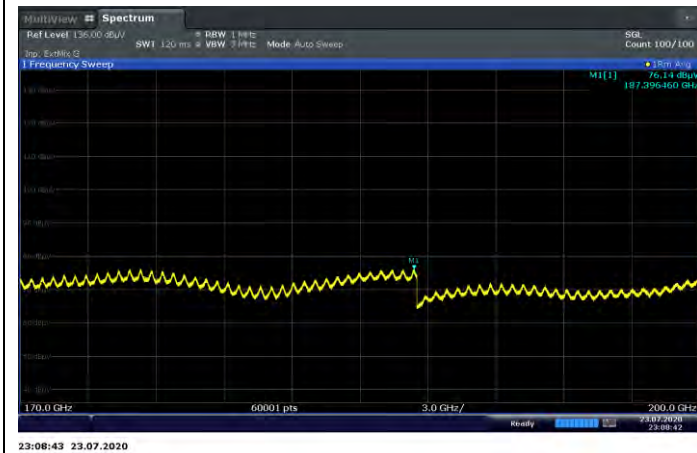


**Low Channel Pol. V**

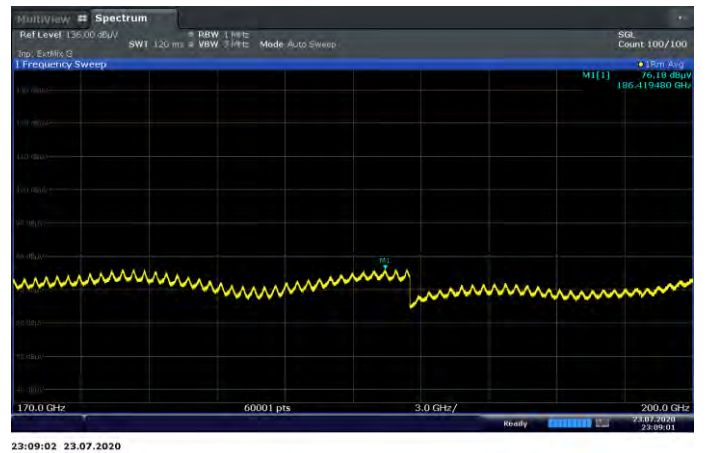


**Middle Channel Pol. H**

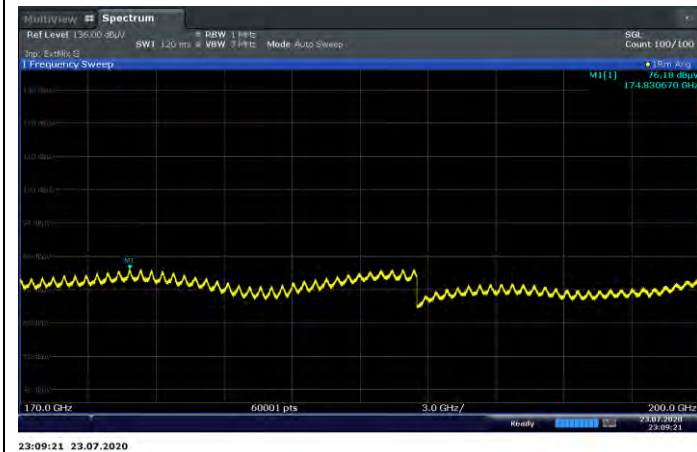


**Middle Channel Pol. V**

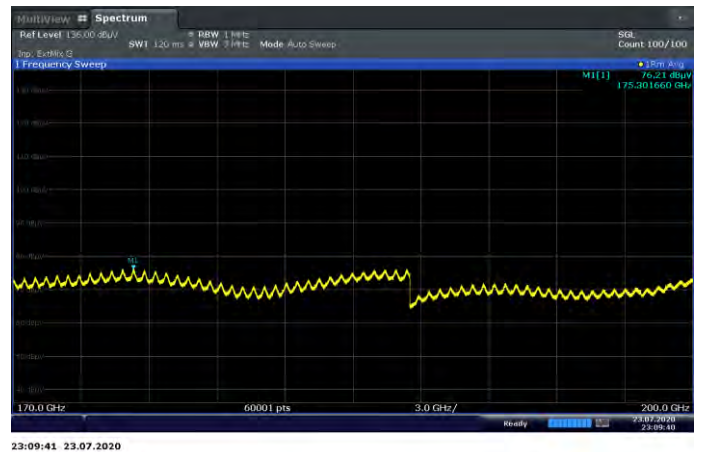

**High Channel Pol. H**

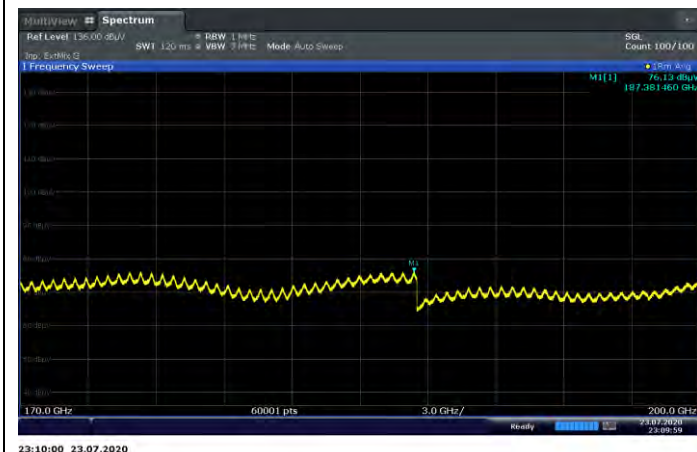


**High Channel Pol. V**

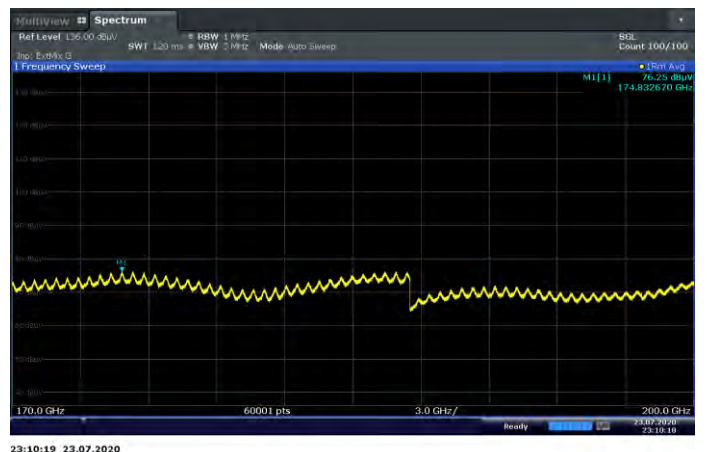




**Antenna 0(K patch), n260 100 MHz 1 CC SISO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

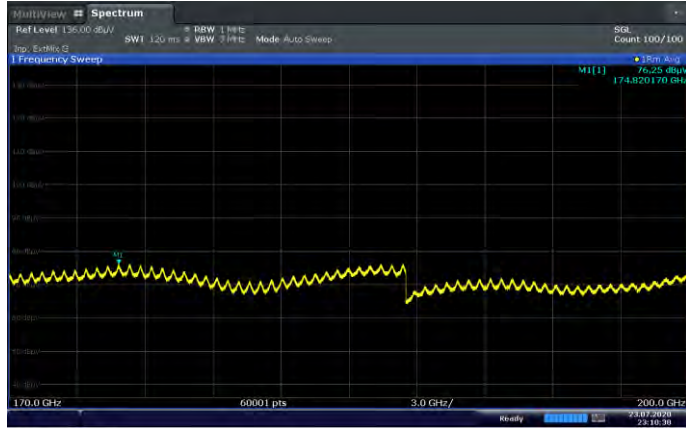


**Low Channel Pol. V**

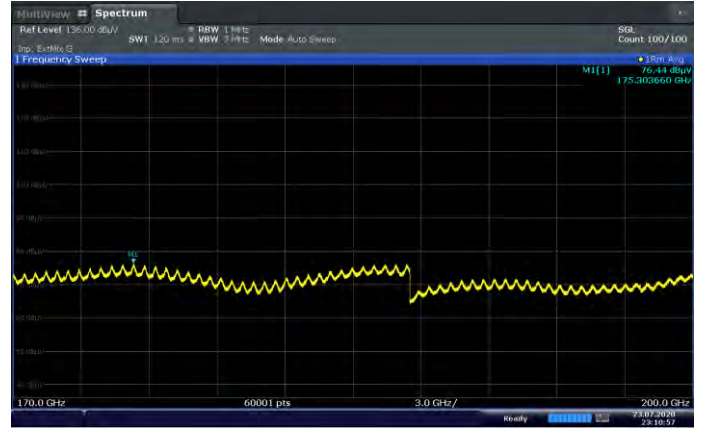


**Middle Channel Pol. H**

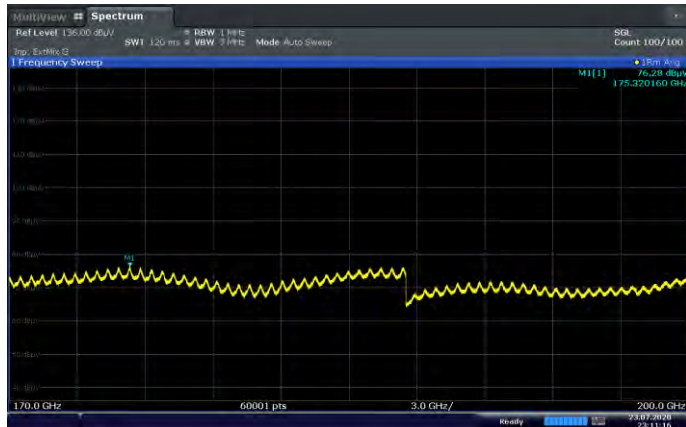


**Middle Channel Pol. V**

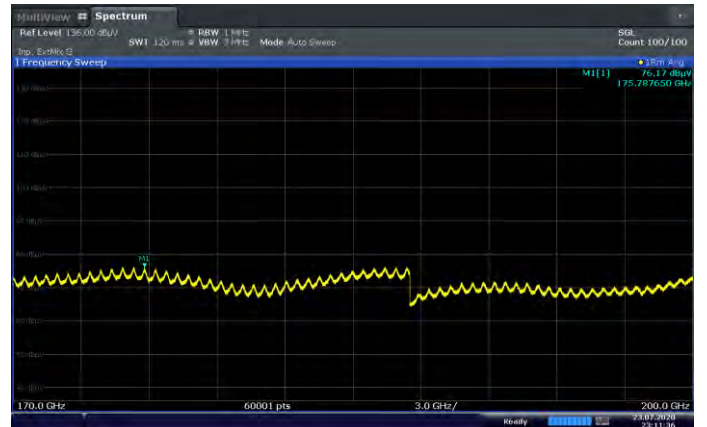

**High Channel Pol. H**

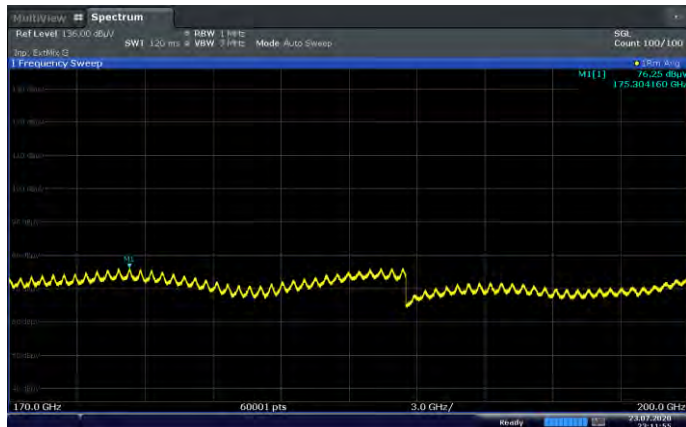


**High Channel Pol. V**

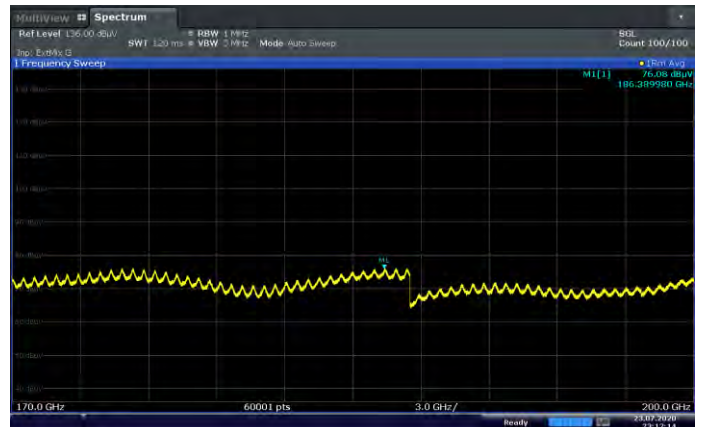


**Antenna 0(K patch), n260 100 MHz 1 CC MIMO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

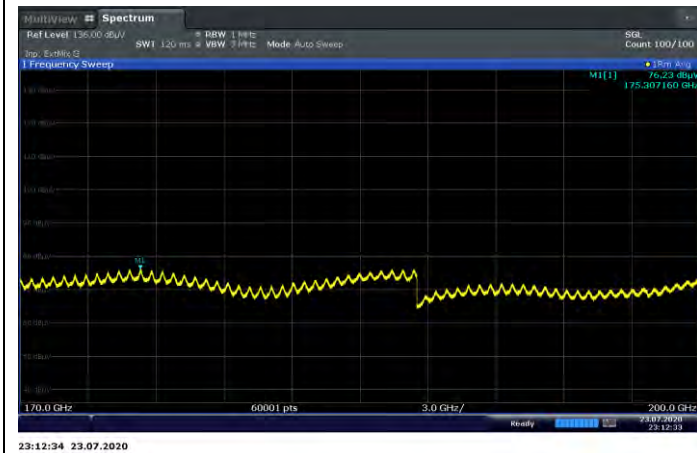

**Low Channel Pol. V**

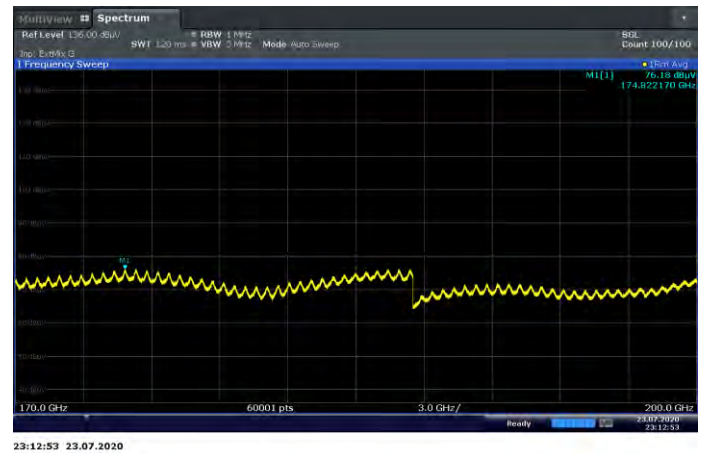


**Middle Channel Pol. H**

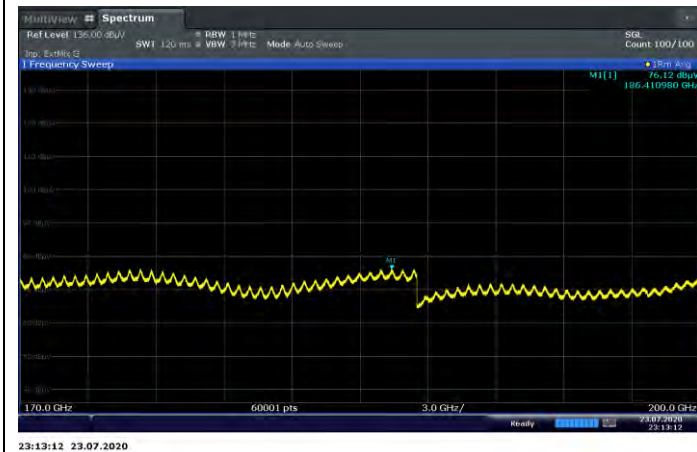


**Middle Channel Pol. V**



**High Channel Pol. H**

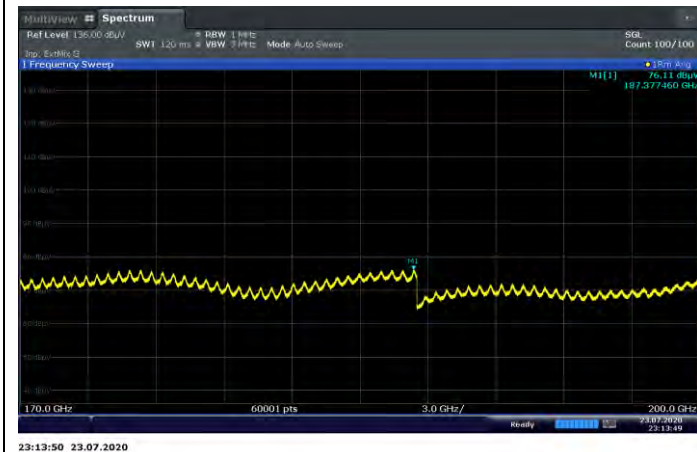


**High Channel Pol. V**

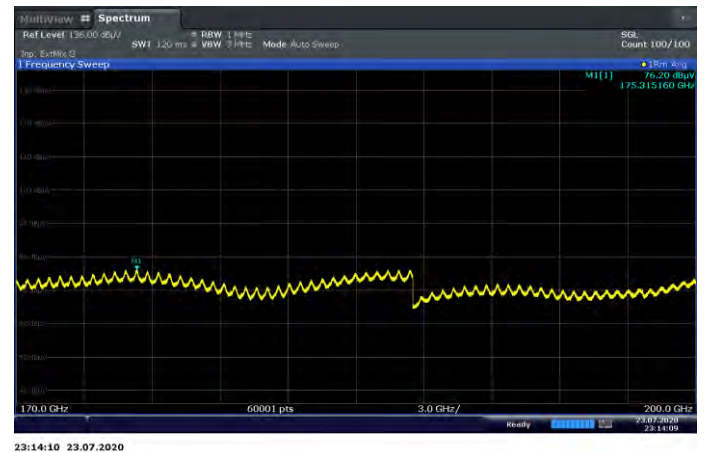


**Antenna 1(L patch), n260 50 MHz 1 CC SISO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

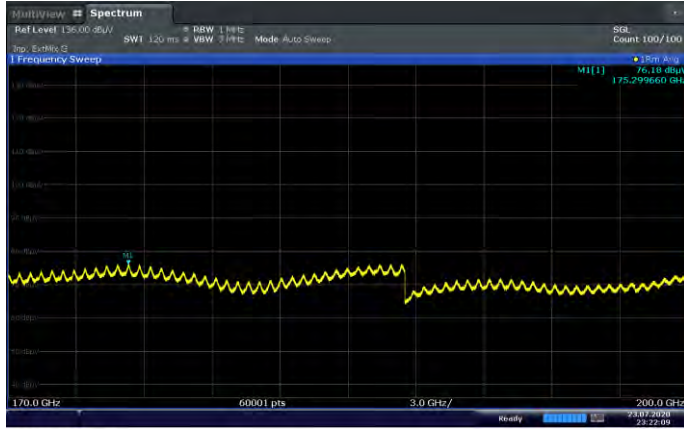


**Low Channel Pol. V**

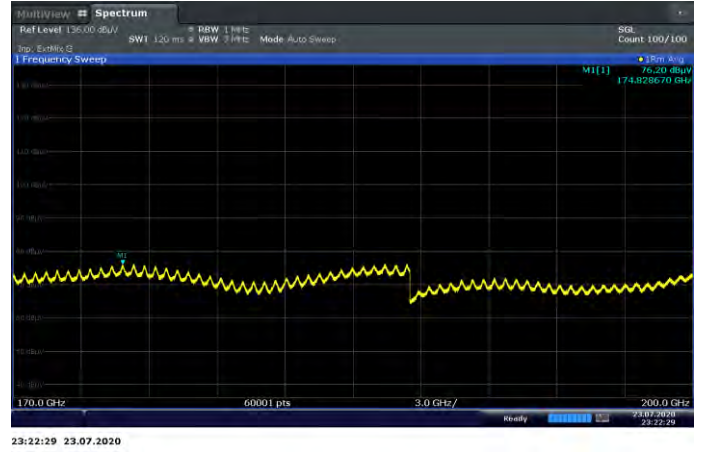


**Middle Channel Pol. H**

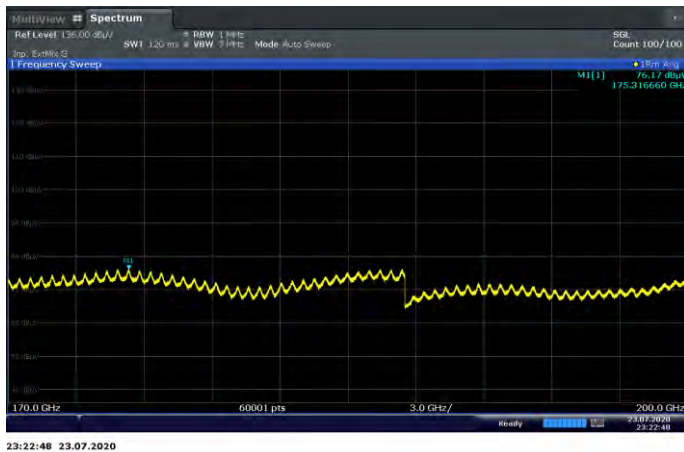


**Middle Channel Pol. V**

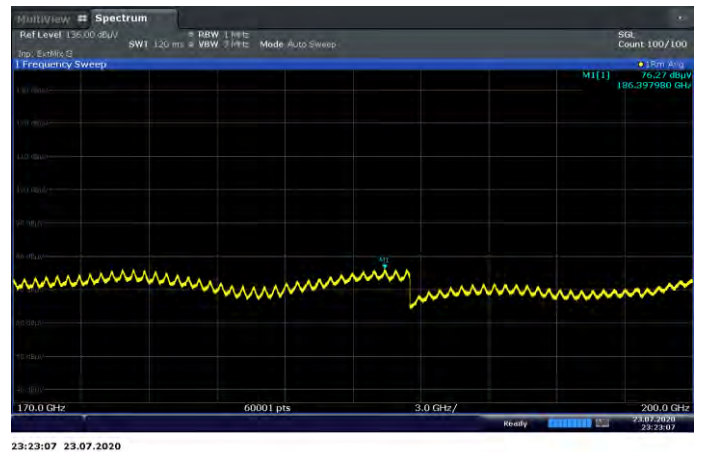

**High Channel Pol. H**

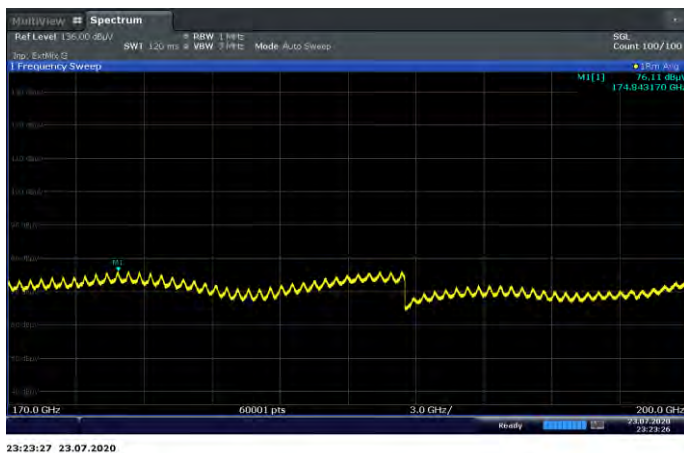


**High Channel Pol. V**

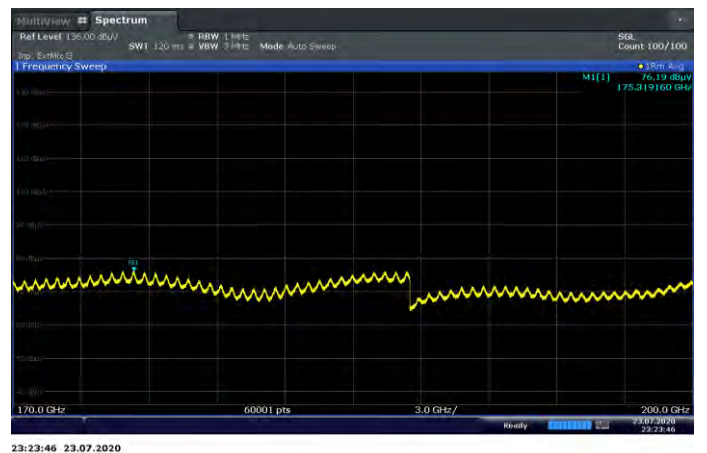




**Antenna 1(L patch), n260 50 MHz 1 CC MIMO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

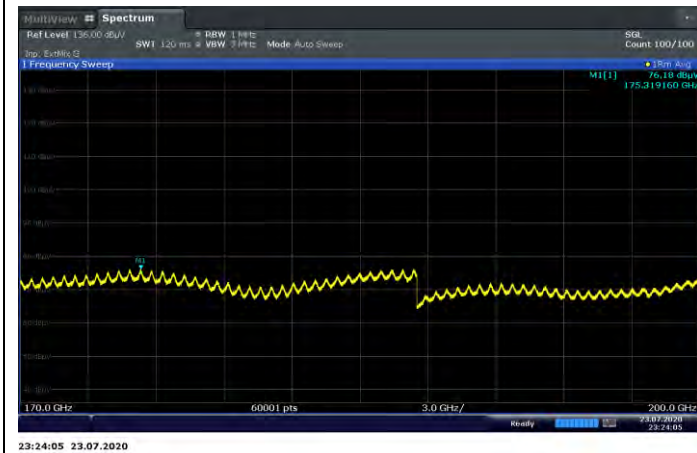


**Low Channel Pol. V**

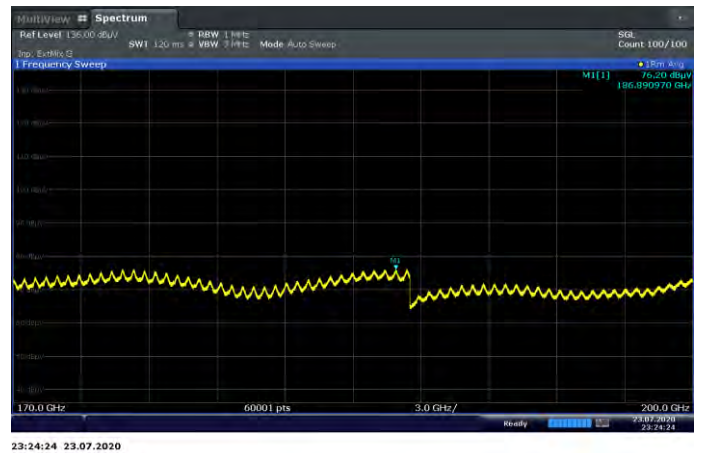


**Middle Channel Pol. H**

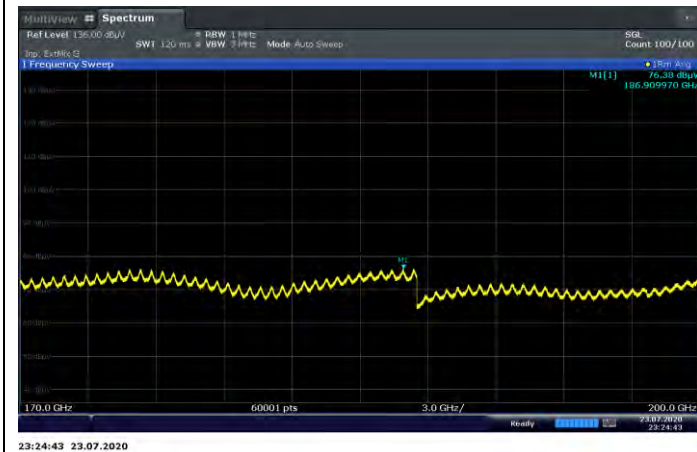


**Middle Channel Pol. V**

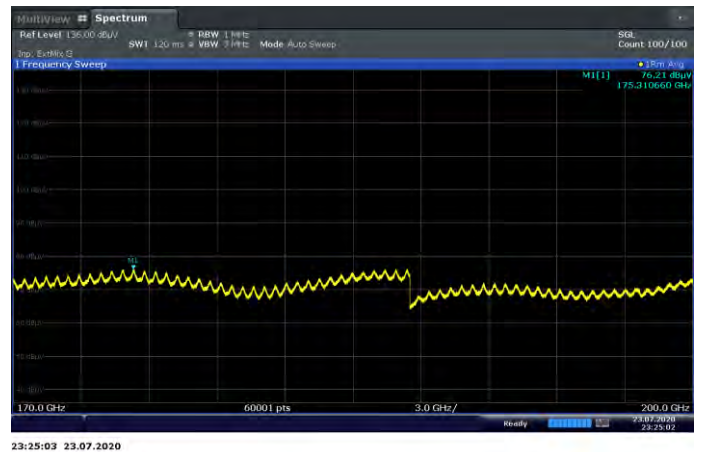

**High Channel Pol. H**

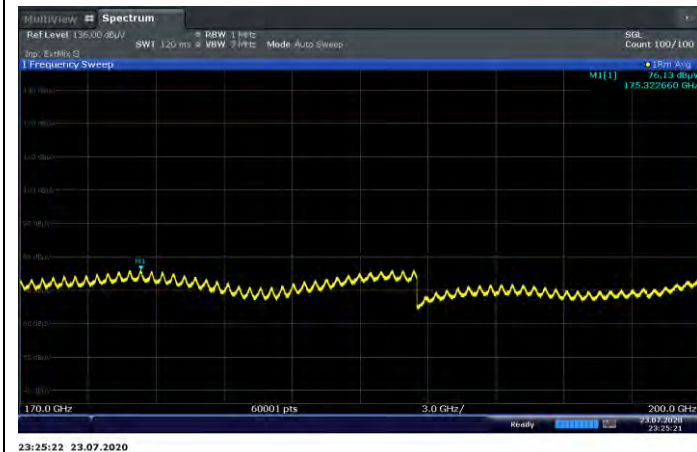


**High Channel Pol. V**

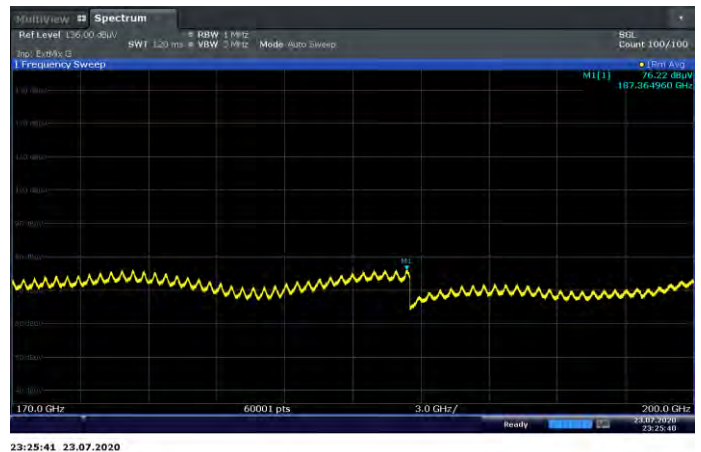


**Antenna 1(L patch), n260 100 MHz 1 CC SISO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

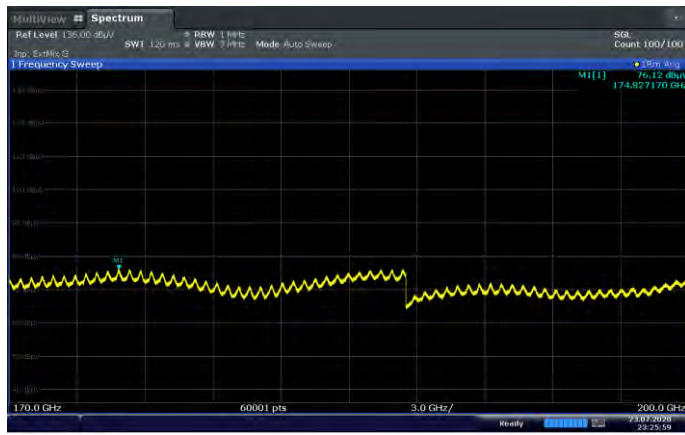


**Low Channel Pol. V**

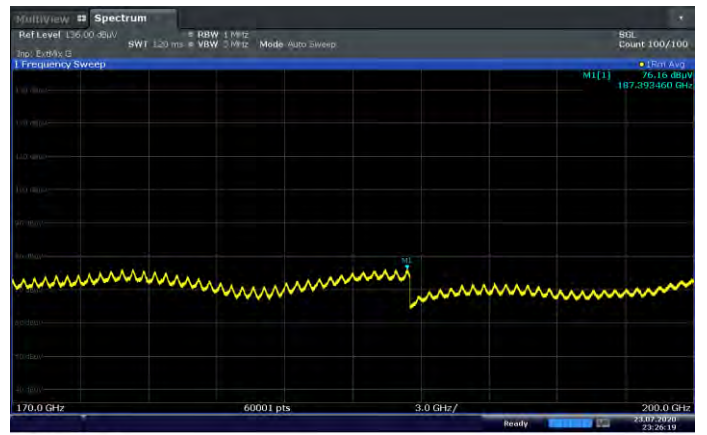


**Middle Channel Pol. H**

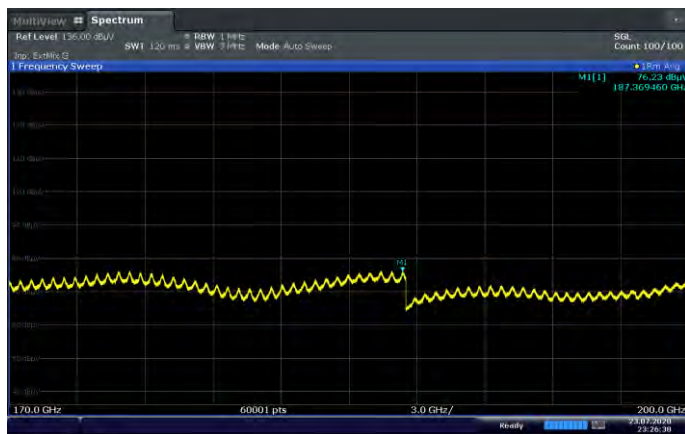


**Middle Channel Pol. V**

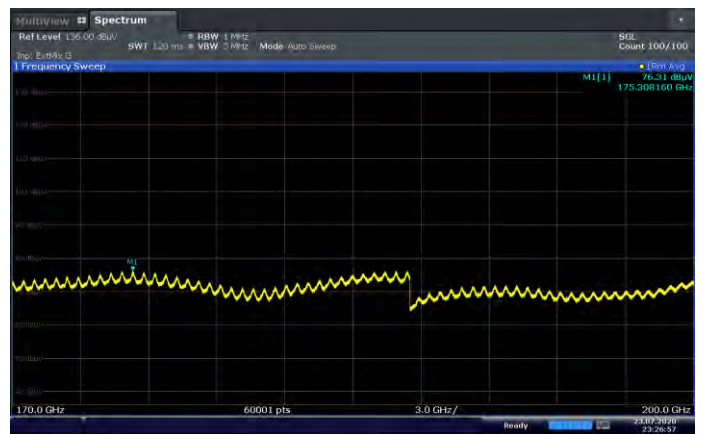

**High Channel Pol. H**

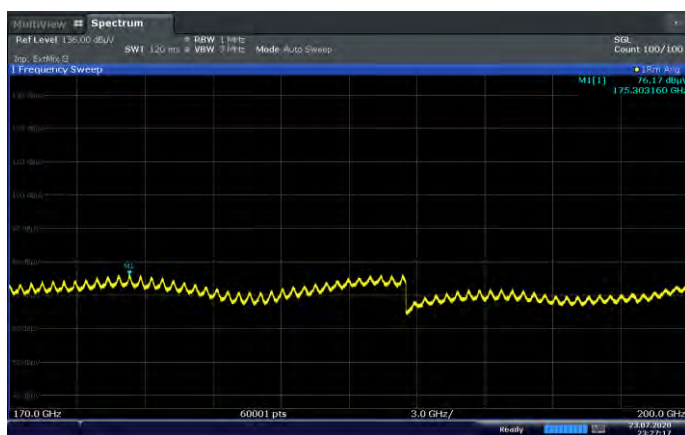


**High Channel Pol. V**

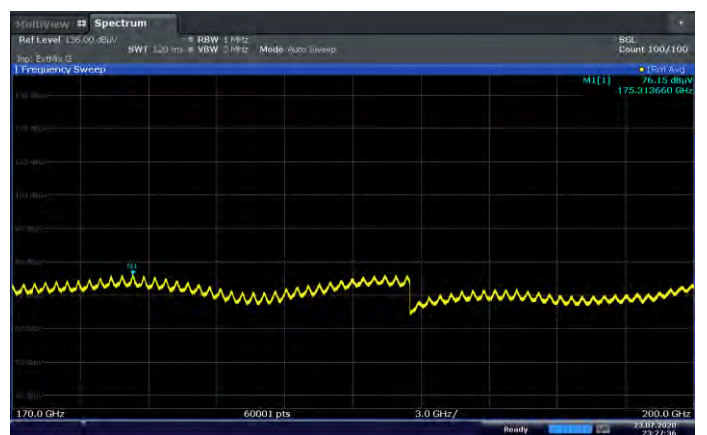


**Antenna 1(L patch), n260 100 MHz 1 CC MIMO [170 GHz ~ 200 GHz]**


**Low Channel Pol. H**

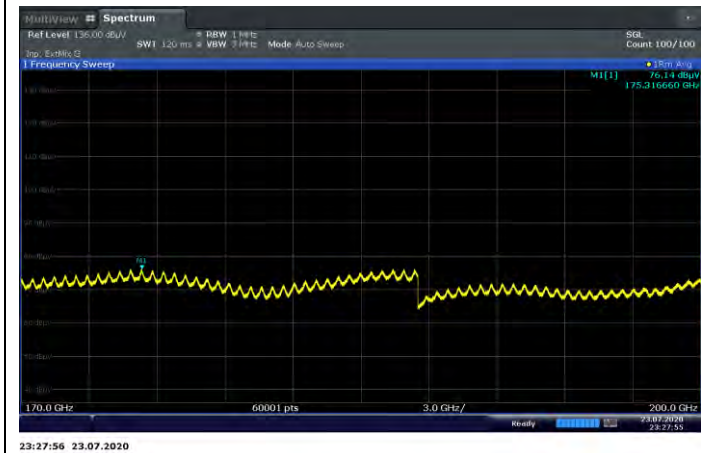


**Low Channel Pol. V**

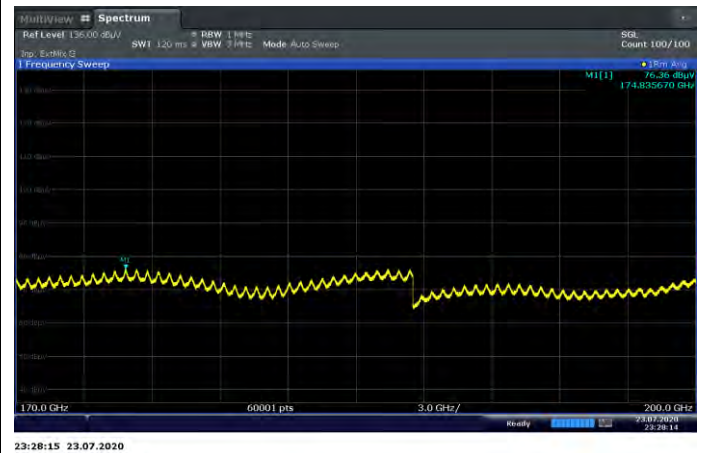


**Middle Channel Pol. H**

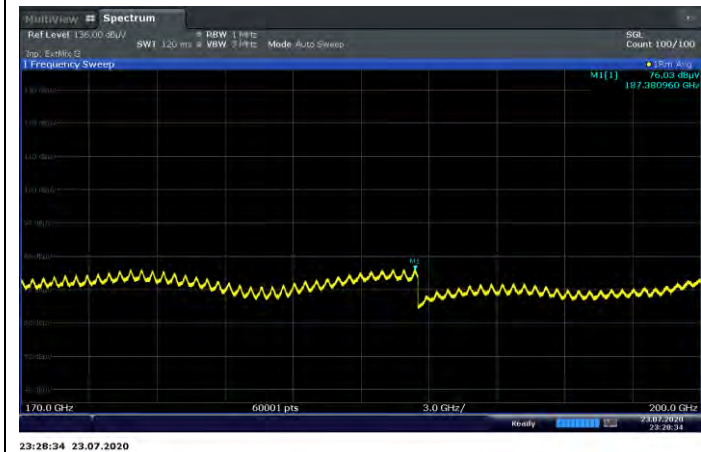


**Middle Channel Pol. V**

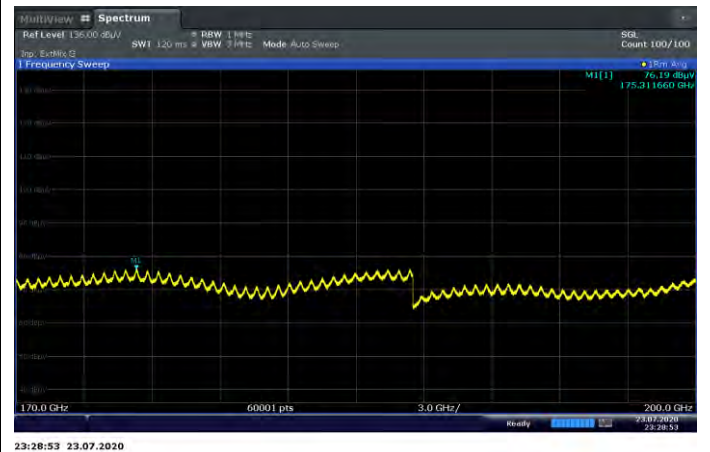

**High Channel Pol. H**

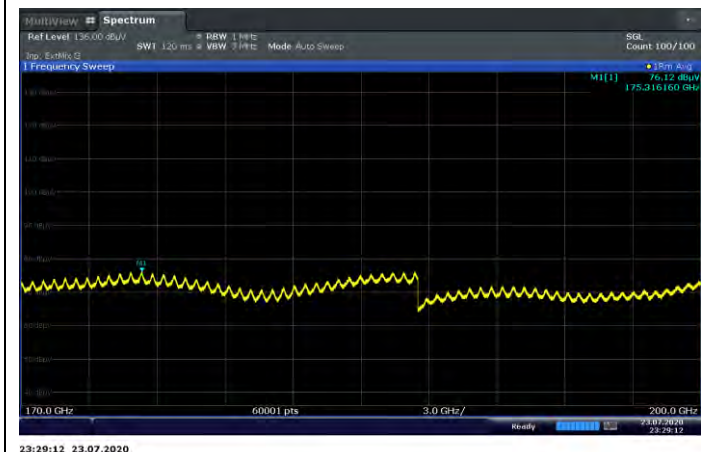

**High Channel Pol. V**

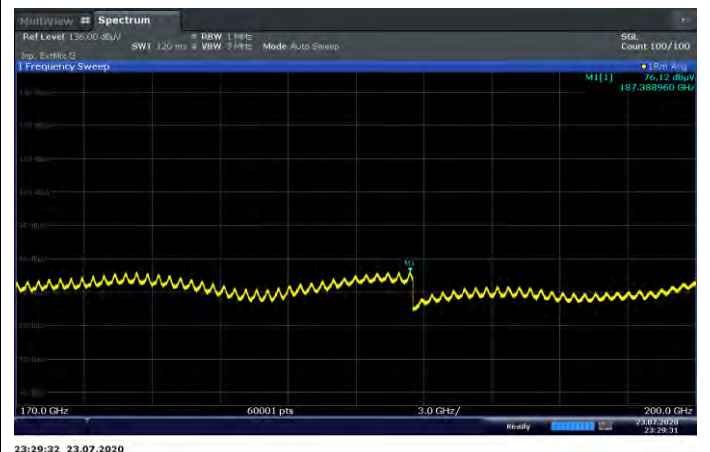



## 5.5. FREQUENCY STABILTY

### FCC Rules

#### Test Requirements:

##### § 2.1055 Measurements required: Frequency stability.

(a) The frequency stability shall be measured with variation of ambient temperature as follows:

- (1) From  $-30^{\circ}$  to  $+50^{\circ}$  centigrade for all equipment except that specified in paragraphs (a) (2) and (3) of this section.

#### Test Procedures:

The measurement is performed in accordance with Section 5.6.4 and 5.6.5 of ANSI C63.26.

##### 5.6.4 Frequency stability over variations in temperature

- a) Supply the EUT with a nominal 60 Hz ac voltage, dc voltage, or install a new or fully charged battery in the EUT.
- b) If possible a dummy load should be connected to the EUT because an antenna near the metallic walls of an environmental test chamber could affect the output frequency of the EUT. If the EUT is equipped with a permanently attached, adjustable-length antenna, the EUT should be placed in the center of the chamber with the antenna adjusted to the shortest length possible.
- c) Turn on the EUT, and tune it to the center frequency of the operating band.
- d) Couple the transmitter output to the measuring instrument through a suitable attenuator and coaxial cable. If connection to the EUT output is not possible, make the measurement by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away).

*NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory authority is the recommended measuring instrument.*

- e) Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT). Adjust the detector bandwidth and span settings to achieve a resolution capable of accurate frequency measurements over the applicable frequency stability limits.
- f) Turn the EUT off, and place it inside the environmental temperature chamber. For devices that have oscillator heaters, energize only the heater circuit.
- g) Set the temperature control on the chamber to the highest temperature specified in the regulatory requirements for the type of device, and allow the oscillator heater and the chamber temperature to stabilize. Unless otherwise instructed by the regulatory authority, this temperature should be  $50^{\circ}\text{C}$ .
- h) While maintaining a constant temperature inside the environmental chamber, turn on the EUT and allow sufficient time for the EUT temperature to stabilize.

- i) Measure the frequency.
- j) Switch off the EUT, but do not switch off the oscillator heater.
- k) Lower the chamber temperature to the next level that is required by the standard and allow the temperature inside the chamber to stabilize. Unless otherwise instructed by the regulators, this temperature step should be 10 °C.
- l) Repeat step h) through step k) down to the lowest specified temperature. Unless otherwise instructed by the regulators, this temperature should be -30 °C. When the frequency stability limit is stated as being sufficient such that the fundamental emissions stay within the authorized bands of operation, a reference point shall be established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $f_L$  and  $f_H$  respectively. The worst-case frequency offset determined in the above methods shall be added or subtracted from the values of  $f_L$  and  $f_H$  and the resulting frequencies must remain within the band.
- m) Omitted

#### 5.6.5 Frequency stability when varying supply voltage

- a) Couple the transmitter output to the measuring instrument through a suitable attenuator and coaxial cable. If connection to the EUT output is not possible make the measurement by connecting an antenna to the measuring instrument with a suitable length of coaxial cable and placing the measuring antenna near the EUT (e.g., 15 cm away)
- b) Supply the EUT with nominal ac or dc voltage. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided. Effects on frequency of transmitter keying (except for broadcast transmitters) and any heating element cycling at the nominal supply voltage and at each extreme also shall be shown.
- c) Turn on the EUT, and couple its output to a frequency counter or other frequency-measuring instrument.
- d) Tune the EUT to the center frequency of the operating band. Adjust the location of the measurement antenna and the controls on the measurement instrument to obtain a suitable signal level (i.e., a level that will not overload the measurement instrument, but is strong enough to allow measurement of the operating or fundamental frequency of the EUT). Adjust the detector bandwidth and span settings to achieve a resolution capable of accurate frequency measurements over the applicable frequency stability limits.

*NOTE—An instrument that has an adequate level of accuracy as specified by the procuring or regulatory authority is the recommended measuring instrument.*

- e) Measure the frequency.
- f) Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.
- g) For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- h) Repeat the frequency measurement.

NOTE—For band-edge compliance, it can be required to make these measurements at the low and high channel of the operating band.

**Note:**

- 1) The results of the frequency stability test shown above the frequency deviation measured values are very small and similar trend for each path, so we are attached only the worst case data.
- 2) We were performed the test using call simulator



**Test Results:**

Reference: Voltage = DC 3.85 V

Antenna 0(K patch), n261

Low Frequency = 27 534.84 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	27534 840 000	0.717	0.000	0.00000
		-30	27534 840 007	7.448	6.730	0.00891
		-20	27534 840 002	2.144	1.427	0.00189
		-10	27534 840 008	8.143	7.426	0.00983
		0	27534 840 000	0.262	-0.456	-0.00060
		+10	27534 840 001	0.725	0.008	0.00001
		+30	27534 840 004	4.020	3.303	0.00437
		+40	27534 840 010	9.723	9.005	0.01192
		+50	27534 840 008	7.977	7.259	0.00960
HIGH	4.40	+20	27534 840 006	6.126	5.409	0.00716
LOW	3.65	+20	27534 840 004	3.894	3.177	0.00420

High Frequency = 28 319.52 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	28319 520 000	0.522	0.000	0.00000
		-30	28319 520 007	7.338	6.815	0.00902
		-20	28319 520 005	5.251	4.728	0.00626
		-10	28319 520 008	7.680	7.158	0.00947
		0	28319 520 007	6.714	6.192	0.00819
		+10	28319 520 002	1.832	1.309	0.00173
		+30	28319 520 009	8.794	8.272	0.01094
		+40	28319 520 008	7.573	7.051	0.00933
		+50	28319 520 009	8.562	8.039	0.01064
HIGH	4.40	+20	28319 520 009	8.967	8.444	0.01117
LOW	3.65	+20	28319 520 007	7.325	6.802	0.00900

Antenna 1(L patch), n261

Low Frequency = 27 534.84 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	27534 840 000	2.086	0.000	0.00000
		-30	27534 840 001	1.258	-0.829	-0.00110
		-20	27534 840 003	2.728	0.642	0.00085
		-10	27534 840 003	3.236	1.149	0.00152
		0	27534 840 009	9.051	6.964	0.00921
		+10	27534 840 007	7.207	5.120	0.00677
		+30	27534 840 007	7.433	5.347	0.00707
		+40	27534 840 005	5.459	3.372	0.00446
		+50	27534 840 005	5.345	3.258	0.00431
HIGH	4.40	+20	27534 840 007	7.018	4.932	0.00653
LOW	3.65	+20	27534 840 000	0.155	-1.931	-0.00255

High Frequency = 28 319.52 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	28319 520 000	2.113	0.000	0.00000
		-30	28319 520 009	9.478	7.365	0.00974
		-20	28319 520 004	3.542	1.429	0.00189
		-10	28319 520 008	8.462	6.349	0.00840
		0	28319 520 008	7.583	5.470	0.00724
		+10	28319 520 009	9.138	7.025	0.00930
		+30	28319 520 004	3.621	1.509	0.00200
		+40	28319 520 009	9.353	7.240	0.00958
		+50	28319 520 006	5.755	3.642	0.00482
HIGH	4.40	+20	28319 520 001	0.511	-1.602	-0.00212
LOW	3.65	+20	28319 520 006	5.853	3.741	0.00495

Antenna 0(K patch), n260

Low Frequency = 37 027.32 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	37027 320 000	5.166	0.000	0.00000
		-30	37027 320 000	0.273	-4.892	-0.00647
		-20	37027 320 000	0.091	-5.075	-0.00671
		-10	37027 320 007	6.688	1.522	0.00201
		0	37027 320 009	9.227	4.061	0.00537
		+10	37027 320 004	4.252	-0.914	-0.00121
		+30	37027 320 002	2.392	-2.774	-0.00367
		+40	37027 320 005	4.813	-0.353	-0.00047
		+50	37027 320 008	8.374	3.208	0.00424
HIGH	4.40	+20	37027 320 005	5.265	0.100	0.00013
LOW	3.65	+20	37027 320 005	5.032	-0.133	-0.00018

High Frequency = 39 966.24 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	39966 240 000	9.731	0.000	0.00000
		-30	39966 240 005	5.028	-4.702	-0.00622
		-20	39966 240 003	2.647	-7.083	-0.00937
		-10	39966 240 006	5.783	-3.948	-0.00522
		0	39966 240 009	8.622	-1.109	-0.00147
		+10	39966 240 009	8.757	-0.974	-0.00129
		+30	39966 240 006	6.397	-3.334	-0.00441
		+40	39966 240 003	3.254	-6.477	-0.00857
		+50	39966 240 009	8.731	-1.000	-0.00132
HIGH	4.40	+20	39966 240 000	0.197	-9.534	-0.01261
LOW	3.65	+20	39966 240 007	6.924	-2.807	-0.00371



Antenna 1(L patch), n260

Low Frequency = 37 027.32 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	37027 320 000	1.569	0.000	0.00000
		-30	37027 320 001	1.427	-0.142	-0.00019
		-20	37027 320 004	4.091	2.522	0.00334
		-10	37027 320 009	9.094	7.525	0.00996
		0	37027 320 010	9.650	8.081	0.01069
		+10	37027 320 005	5.345	3.776	0.00500
		+30	37027 320 006	6.102	4.533	0.00600
		+40	37027 320 005	5.337	3.769	0.00499
		+50	37027 320 006	6.210	4.641	0.00614
HIGH	4.40	+20	37027 320 002	2.125	0.556	0.00074
LOW	3.65	+20	37027 320 004	3.737	2.168	0.00287

High Frequency = 39 966.24 MHz

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (Hz)	ppm
100%	3.85	+20(Ref)	39966 240 000	9.129	0.000	0.00000
		-30	39966 240 005	5.401	-3.728	-0.00493
		-20	39966 240 003	3.263	-5.866	-0.00776
		-10	39966 240 008	8.099	-1.030	-0.00136
		0	39966 240 005	4.753	-4.376	-0.00579
		+10	39966 240 009	9.299	0.170	0.00022
		+30	39966 240 005	5.255	-3.874	-0.00513
		+40	39966 240 009	8.531	-0.598	-0.00079
		+50	39966 240 004	3.915	-5.214	-0.00690
HIGH	4.40	+20	39966 240 003	2.686	-6.443	-0.00852
LOW	3.65	+20	39966 240 002	2.231	-6.899	-0.00913

**6. MIXER VERIFICATION CERTIFICATE & CHECK**

**열람용**  
This certificate may not be reproduced other than in full except with permission of the issuing laboratory.

**교정성적서**  
CALIBRATION CERTIFICATE  
경기도 이천시 마장면 서이천로 578번길 74  
TEL : 031-645-6900, FAX : 031-645-6969



성적서발급번호(Certificate No) : IC-2019-61925  
교정번호(Calibration No) : C-2019-072381

페이지(page) : 1 of 3

- 1. 의뢰자 (Client)**
  - 기관명 (Name) : (주)에이치시티
  - 주소 (Address) : 경기도 이천시 마장면 서이천로 578번길 74
- 2. 측정기 (Calibration Subject)** ◇ 등록번호 : 288236
  - 기기명 (Description) : WR-08 HARMONIC MIXER
  - 제작회사 및 형식(Manufacturer and Model Name) : OML / M08HWD
  - 기기번호 (Serial Number) : 160419-1
- 3. 교정일자 (Date of Calibration)** : 2019.09.09      **차기교정예정일자** : 2020.09.09  
(The due date of next Calibration)
- 4. 교정환경 (Environment)**
  - 온도(Temperature) : ( 23.2 ± 0.4 ) °C      - 습도(Humidity) : ( 50 ± 2 ) % R.H.
  - 교정장소 (Location) : 교정표준실(Permanent Calibration Lab)
- 5. 측정표준의 소급성 (Traceability)** ◇ Field code : 40641(RF SPECTRUM ANALYZER)  
**교정방법 및 소급성 서술 (Calibration method and/or brief description)**  
상기 기기는 고주파 스펙트럼 분석기의 교정절차(HCT-CS-125-40641)에 따라 국가측정표준기관으로부터 측정의 소급성이 확보된 아래의 표준장비를 이용하여 교정 되었음.

교정에 사용한 표준장비 명세 (List of used standards/specifications)

기기명 (Description)	제작회사 및 형식 (Manufacturer and Model Name)	기기번호 (Serial Number)	차기교정예정일자 (The due date of next Calibration)	교정기관 (Calibration laboratory)
EXG ANALOG SIGNAL GENERATOR	KEYSIGHT N5173B	MY53270544	2019/10/04	(주)에이치시티
EPM SERIES POWER METER	AGILENT E4419B	GB42420565	2019/11/01	(주)에이치시티
POWER SENSOR	KEYSIGHT W8486A	MY56370005	2019/12/27	Keysight Technologies
WR-08 MULTIPLIER SOURCE MODULE	OML S08MS-A	164019-1	2020/09/09	(주)에이치시티

- 6. 교정결과 (Calibration result)** : 교정결과 참조 (Refer to attachment)
- 7. 측정불확도 (Measurement uncertainty)** : 교정결과 참조 (Refer to attachment)  
신뢰수준 약 95 %, k = 2 ( Confidence level about 95 %, k = 2 )

<b>확인 (affirmation)</b>	작성자 (Measurements performed by)	승인자 (Approved by)
	성명 (Name) 박민지	직위 (Title) 기술책임자(Technical Cal. Manager) (정) 이 승 찬 성명 (Name) 이승찬

위 성적서는 국제시험기관인정협력체(International Laboratory Accreditation Cooperation) 상호인정협정(Mutual Recognition Arrangement)에 서명한 한국인정기구(KOLAS)로부터 공인 받은 분야의 교정결과입니다.

2019. 09. 11  
한국인정기구 인정      (주)에이치시티 대표이사  
Accredited by KOLAS, Republic of KOREA      President, HCT Co., Ltd.



※ 이 성적서는 측정기의 정밀정확도에 영향을 미치는 요소(과부하, 온도, 습도 등)의 급격한 변화가 발생한 경우에는 무효가 됩니다.

※ 고객전용사이트(http://www.callab.co.kr)에서 성적서의 진위여부 확인이 가능합니다.

※ 성적서의 원본은 상단에 HCT로고그램이 들어간 위변조 방지 용지에 인쇄되어 발급되며, 원본 복사시에는 복사본이라는 표시가 처리됩니다.

F-02P-02-008 (Rev.02)


**교정결과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61925  
교정번호(Calibration No) : C-2019-072381

페이지(page) : 2 of 3

1. Conversion Loss Graph

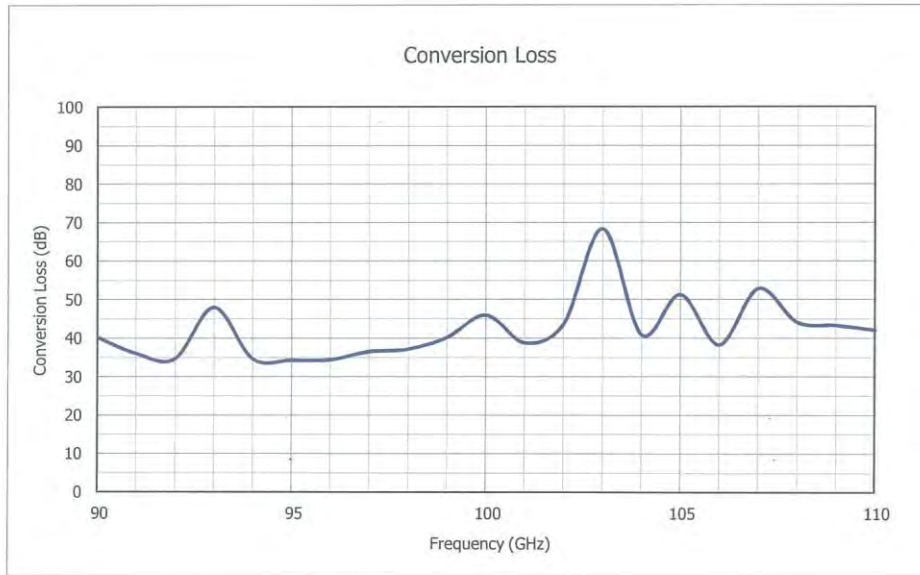

Note 1) R&S FSW (SN 104544)와 함께 교정된 결과임

Note 2) 측정 조건 : RF = -25 dBm, Harmonic Order = 10, L.O. Level = 17 dBm, Bias Value = 0.01 mA

F-02P-02-008 (Rev.02)



**교정결과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61925

교 정 번 호(Calibration No) : C-2019-072381


페이지(page) : 3 of 3

2. Conversion Loss Data

Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)	Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)
90.0	40.23	0.89	101.0	38.81	0.89
91.0	35.98	0.89	102.0	43.65	0.89
92.0	34.65	0.89	103.0	68.37	0.89
93.0	47.96	0.89	104.0	40.88	0.89
94.0	34.60	0.89	105.0	51.24	0.89
95.0	34.29	0.89	106.0	38.26	0.89
96.0	34.40	0.89	107.0	52.83	0.89
97.0	36.50	0.89	108.0	44.13	0.89
98.0	37.13	0.89	109.0	43.30	0.89
99.0	40.18	0.89	110.0	42.01	0.89
100.0	45.99	0.89	-	-	-

끝.

F-02P-02-008 (Rev.02)

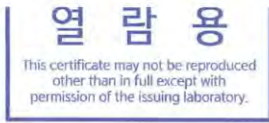

## 점검성적서

### CHECK REPORTS

경기도 이천시 마장면 서이천로 578번길 74  
Tel : 031-645-6900, Fax : 031-645-6969

성적서발급번호(Certificate No) : IC-2019-63581  
점검번호(Checks No) : C-2019-074399

페이지(page) : 1 of 3

1. 의뢰자 (Client)
  - 기관명 (Name) : (주)에이치시티
  - 주소 (Address) : 경기도 이천시 마장면 서이천로 578번길 74
2. 측정기 (Check Subject) ◇ 등록번호 : 366196
  - 기기명 (Description) : WR-08 HARMONIC MIXER
  - 제작회사 및 형식 (Manufacturer and Model Name) : OML / M08HWD
  - 기기번호 (Serial Number) : 160419-1
3. 점검일자 (Date of Check) : 2019.09.09
4. 점검환경 (Environment Conditions)
  - 온도(Temperature) : ( 23.2 ± 0.4 ) °C
  - 습도(Humidity) : ( 50 ± 2 ) % R.H.
  - 점검장소 (Location) : 고정표준실(Permanent Calibration Lab)

5. 측정표준의 소급성 (Traceability)



점검방법 및 소급성 서술 (Check method and/or brief description)

상기 기기는 고주파 스펙트럼 분석기의 교정절차(HCT-CS-125-40641)에 따라 국가측정표준기관으로부터 측정의 소급성이 확보된 아래의 아래의 표준장비와 자체 점검된 장비를 이용하여 점검 되었습니다.

점검에 사용한 표준장비 명세 (List of used standards/specifications)

기기명 (Description)	제작회사 및 형식 (Manufacturer and Model Name)	기기번호 (Serial Number)	차기교정예정일자 (The due date of next Calibration)	교정기관 (Calibration laboratory)
EXG ANALOG SIGNAL GENERATOR	KEYSIGHT N5173B	MY53270544	2019/10/04	(주)에이치시티
ERICKSON POWER METER	VDI PM5	394V	점검	(주)에이치시티
WR-08 MULTIPLIER SOURCE MODULE	OML S08MS-A	160419-1	점검	(주)에이치시티

6. 점검결과 (Check result) : 점검결과 참조 (Refer to attachment)

<b>확 인</b> (affirmation)	작성자 (checks performed by)	승인자 (Approved by)
	성명 (Name) : 박민지 	직위 (Title) 기술책임자(Technical Cal. Manager) (장)  성명 (Name) 이승찬

위 점검결과는 국가교정기관 제정제도 운영요령 제41조 규정에 의거하여 국가측정표준과 소급성이 확립된 측정기로서 점검한 성적서임을 증명합니다.

2019. 09. 11



(주)에이치시티 대표이사  
President, HCT Co., Ltd.



본 성적서는 측정기의 정밀정확도에 영향을 미치는 요소(과부하, 온도, 습도 등)의 급격한 변화가 발생한 경우에는 무효가 됩니다.

F-02P-02-010 (Rev.01)


## 점검결과

### CHECK RESULT

성적서발급번호(Certificate No) : IC-2019-63581  
 점검번호(Checks No) : C-2019-074399

페이지(page) : 2 of 3

#### 1. Conversion Loss Graph

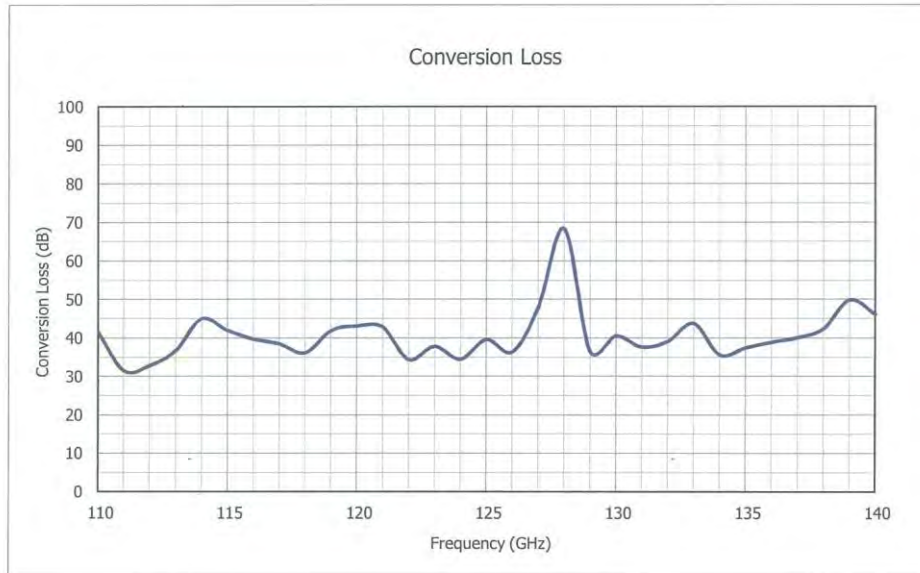

Note 1) R&S FSW (SN 104544)와 함께 교정된 결과임

Note 2) 측정 조건 : RF = -25 dBm, Harmonic Order = 10, L.O. Level = 17 dBm, Bias Value = 0.01 mA

Note 3) 110 GHz 초과 대역의 전력에 대해 국제적인 소급표준이 없으므로 HCT에서 자체적으로 소급된 기준기로 점검되었음.

- In the absence of power standards above 110 GHz, power measurements above 110 GHz are to confirm operation functionality and traceable only to HCT.

F-02P-02-010 (Rev.01)



## 점검결과 CHECK RESULT

성적서발급번호(Certificate No) : IC-2019-63581  
 점검번호(Checks No) : C-2019-074399

페이지(page) : 3 of 3

2. Conversion Loss Data

Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)	Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)
110.0	41.6	0.82	126.0	36.3	0.82
111.0	31.5	0.82	127.0	47.9	0.82
112.0	32.8	0.82	128.0	68.3	0.82
113.0	36.6	0.82	129.0	36.5	0.82
114.0	44.9	0.82	130.0	40.5	0.82
115.0	41.9	0.82	131.0	37.6	0.82
116.0	39.7	0.82	132.0	39.0	0.82
117.0	38.4	0.82	133.0	43.7	0.82
118.0	36.1	0.82	134.0	35.5	0.82
119.0	41.8	0.82	135.0	37.3	0.82
120.0	43.1	0.82	136.0	38.9	0.82
121.0	42.8	0.82	137.0	40.0	0.82
122.0	34.3	0.82	138.0	42.3	0.82
123.0	37.8	0.82	139.0	49.8	0.82
124.0	34.4	0.82	140.0	46.1	0.82
125.0	39.6	0.82	-	-	-

끝.

F-02P-02-010 (Rev.01)

**열람용**  
This certificate may not be reproduced  
other than in full except with  
permission of the issuing laboratory.

**교정성적서**  
CALIBRATION CERTIFICATE  
경기도 이천시 마장면 서이천로 578번길 74  
TEL : 031-645-6900, FAX : 031-645-6969



성적서발급번호(Certificate No) : IC-2019-61921  
교정번호(Calibration No) : C-2019-072377

페이지(page) : 1 of 3

**1. 의뢰자 (Client)**

- 기관명 (Name) : (주)에이치시티  
- 주소 (Address) : 경기도 이천시 마장면 서이천로 578번길 74

**2. 측정기 (Calibration Subject)**

◇ 등록번호 : 288235  
- 기기명 (Description) : WR-12 HARMONIC MIXER  
- 제작회사 및 형식(Manufacturer and Model Name) : OML / M12HWD  
- 기기번호 (Serial Number) : 160419-1

**3. 교정일자 (Date of Calibration)** : 2019.09.09

차기교정예정일자 : 2020.09.09  
(The due date of next Calibration)

**4. 교정환경 (Environment)**

- 온도(Temperature) : ( 23.2 ± 0.4 ) °C - 습도(Humidity) : ( 50 ± 2 ) % R.H.  
- 교정장소 (Location) : 교정표준실(Permanent Calibration Lab)

**5. 측정표준의 소급성 (Traceability)** ◇Field code : 40641(RF SPECTRUM ANALYZER)

교정방법 및 소급성 서술 (Calibration method and/or brief description)

상기 기기는 고주파 스펙트럼 분석기의 교정절차(HCT-CS-125-40641)에 따라 국가측정표준기관으로부터 측정의 소급성이 확보된 아래의 표준장비를 이용하여 교정 되었음.

교정에 사용한 표준장비 명세 (List of used standards/specifications)

기기명 (Description)	제작회사 및 형식 (Manufacturer and Model Name)	기기번호 (Serial Number)	차기교정예정일자 (The due date of next Calibration)	교정기관 (Calibration laboratory)
EXG ANALOG SIGNAL GENERATOR	KEYSIGHT N5173B	MY53270544	2019/10/04	(주)에이치시티
EPM SERIES POWER METER	AGILENT E4419B	GB42420565	2019/11/01	(주)에이치시티
POWER SENSOR	KEYSIGHT V8486A	MY56330017	2019/12/27	Keysight Technologies
POWER SENSOR	KEYSIGHT W8486A	MY56370005	2019/12/27	Keysight Technologies
WR-12 MULTIPLIER SOURCE MODULE	OML S12MS-A	160419-1	2020/09/09	(주)에이치시티

**6. 교정결과 (Calibration result)**

: 교정결과 참조 (Refer to attachment)

**7. 측정불확도 (Measurement uncertainty)**

: 교정결과 참조 (Refer to attachment)

신뢰수준 약 95 %, k = 2 ( Confidence level about 95 %, k = 2 )

<b>확 인</b> (affirmation)	작성자 (Measurements performed by)	승인자 (Approved by)
	성명 (Name) 박민지	직위 (Title) 기술책임자(Technical Cal. Manager) (명) 이 승 찬 성명 (Name) 이승찬

위 성적서는 국제시험기관인정협력체(International Laboratory Accreditation Cooperation) 상호인정협정(Mutual Recognition Arrangement)에 서명한 한국인정기구(KOLAS)로부터 공인 받은 분야의 교정결과입니다.

2019. 09. 11

한국인정기구 인정  
Accredited by KOLAS, Republic of KOREA

주에이치시티 대표이사  
President, HCT Co., Ltd.



본 이 성적서는 측정기의 정밀정확도에 영향을 미치는 요소(과부하, 온도, 습도 등)의 급격한 변화가 발생한 경우에는 무효가 됩니다.

※ 고객연용사이트(http://www.callab.co.kr)에서 성적서의 진위여부 확인이 가능합니다.

※ 성적서의 원본은 상단에 HCT로고그림이 들어간 뒤번호 방지 용지에 인쇄되어 발급되며, 원본 복사시에는 복사본이라는 표시가 처리됩니다.

F-02P-02-008 (Rev.02)


**교정결과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61921  
교정번호(Calibration No) : C-2019-072377

페이지(page) : 2 of 3

1. Conversion Loss Graph

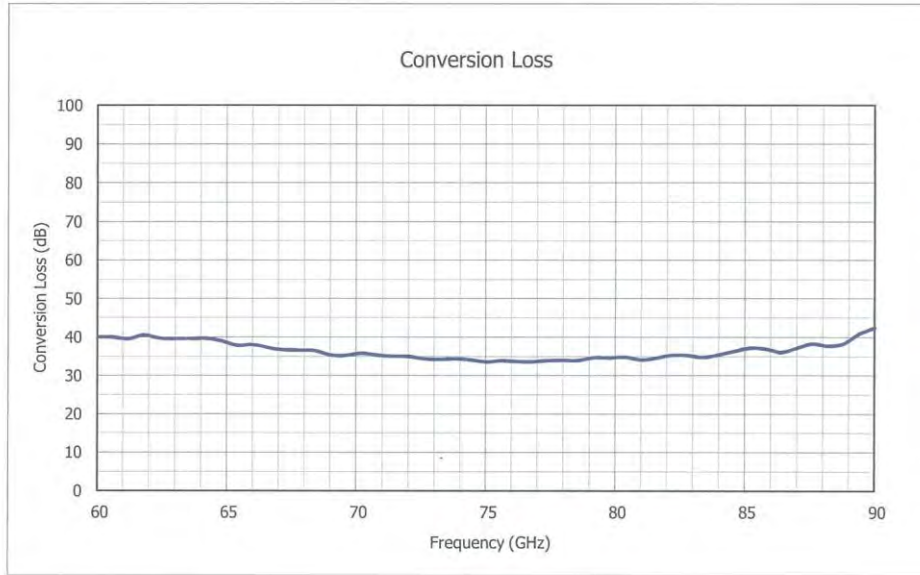

Note 1) R&S FSW (SN 104544)와 함께 교정된 결과임

Note 2) 측정 조건 : RF = -25 dBm, Harmonic Order = 6, L.O. Level = 17 dBm, Bias Value = 4.98 mA

F-02P-02-008 (Rev.02)



**교 정 결 과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61921  
교 정 번 호(Calibration No) : C-2019-072377

페이지(page) : 3 of 3

2. Conversion Loss Data

Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)	Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)
60.0	40.07	0.89	75.6	33.85	0.82
60.6	40.00	0.89	76.2	33.65	0.82
61.2	39.55	0.89	76.8	33.61	0.82
61.8	40.54	0.89	77.4	33.90	0.82
62.4	39.71	0.89	78.0	33.98	0.82
63.0	39.59	0.90	78.6	33.93	0.82
63.6	39.58	0.89	79.2	34.68	0.82
64.2	39.65	0.89	79.8	34.61	0.82
64.8	39.03	0.89	80.4	34.80	0.82
65.4	37.86	0.89	81.0	34.11	0.82
66.0	38.00	0.89	81.6	34.57	0.82
66.6	37.24	0.90	82.2	35.33	0.82
67.2	36.69	0.89	82.8	35.24	0.82
67.8	36.59	0.89	83.4	34.76	0.82
68.4	36.48	0.89	84.0	35.48	0.82
69.0	35.31	0.89	84.6	36.37	0.82
69.6	35.21	0.89	85.2	37.19	0.82
70.2	35.77	0.89	85.8	36.94	0.82
70.8	35.29	0.89	86.4	36.06	0.82
71.4	35.00	0.89	87.0	37.18	0.82
72.0	34.94	0.89	87.6	38.26	0.82
72.6	34.36	0.89	88.2	37.72	0.82
73.2	34.21	0.89	88.8	38.28	0.82
73.8	34.32	0.89	89.4	40.81	0.82
74.4	34.12	0.89	90.0	42.41	0.82
75.0	33.56	0.82	-	-	-

끝.

F-02P-02-008 (Rev.02)

**열람용**  
This certificate may not be reproduced other than in full except with permission of the issuing laboratory.

**교정성적서**  
CALIBRATION CERTIFICATE  
경기도 이천시 마장면 서이천로 578번길 74  
TEL : 031-645-6900, FAX : 031-645-6969



성적서발급번호(Certificate No) : IC-2019-61926  
교정번호(Calibration No) : C-2019-072382

페이지(page) : 1 of 3

- 1. 의뢰자 (Client)**  
- 기관명 (Name) : (주)에이치시티  
- 주소 (Address) : 경기도 이천시 마장면 서이천로 578번길 74
- 2. 측정기 (Calibration Subject)** ◇ 등록번호 : 288234  
- 기기명 (Description) : WR-19 HARMONIC MIXER  
- 제작회사 및 형식 (Manufacturer and Model Name) : OML / M19HWD  
- 기기번호 (Serial Number) : 160429-1
- 3. 교정일자 (Date of Calibration)** : 2019.09.09      차기교정예정일자 : 2020.09.09  
(The due date of next Calibration)
- 4. 교정환경 (Environment)**  
- 온도(Temperature) : ( 23.2 ± 0.4 ) °C      - 습도(Humidity) : ( 50 ± 2 ) % R.H.  
- 교정장소 (Location) : 교정표준실(Permanent Calibration Lab)
- 5. 측정표준의 소급성 (Traceability)** ◇Field code : 40641(RF SPECTRUM ANALYZER)  
교정방법 및 소급성 서술 (Calibration method and/or brief description)  
상기 기기는 고주파 스펙트럼 분석기의 교정절차(HCT-CS-125-40641)에 따라 국가측정표준기관으로부터 측정의 소급성이 확보된 아래의 표준장비를 이용하여 교정 되었음.

**교정에 사용한 표준장비 명세 (List of used standards/specifications)**

기기명 (Description)	제작회사 및 형식 (Manufacturer and Model Name)	기기번호 (Serial Number)	차기교정예정일자 (The due date of next Calibration)	교정기관 (Calibration laboratory)
EXG ANALOG SIGNAL GENERATOR	KEYSIGHT N5173B	MY53270544	2019/10/04	(주)에이치시티
EPM SERIES POWER METER	AGILENT E4419B	GB42420565	2019/11/01	(주)에이치시티
POWER SENSOR	AGILENT 8487A	MY41092450	2020/01/22	Keysight Technologies
POWER SENSOR	KEYSIGHT V8486A	MY56330017	2019/12/27	Keysight Technologies
WR-19 MULTIPLIER SOURCE MODULE	OML S19MS-A	160516-1	2020/09/09	(주)에이치시티

- 6. 교정결과 (Calibration result)** : 교정결과 참조 (Refer to attachment)
- 7. 측정불확도 (Measurement uncertainty)** : 교정결과 참조 (Refer to attachment)  
신뢰수준 약 95 %, k = 2 ( Confidence level about 95 %, k = 2 )

<b>확 인</b> (affirmation)	작성자 (Measurements performed by)	승인자 (Approved by)
	성명 (Name) 박민지	직위 (Title) 기술책임자(Technical Cal. Manager) (정) 이 승 찬 성명 (Name) 이승찬

위 성적서는 국제시험기관인정협력체(International Laboratory Accreditation Cooperation) 상호인정협정(Mutual Recognition Arrangement)에 서명한 한국인정기구(KOLAS)로부터 공인 받은 분야의 교정결과입니다.

2019. 09. 11  
한국인정기구 인정      (주)에이치시티 대표이사  
Accredited by KOLAS, Republic of KOREA      President, HCT Co., Ltd.



☞ 이 성적서는 측정기의 정밀정확도에 영향을 미치는 요소(과부하, 온도, 습도 등)의 급격한 변화가 발생한 경우에는 무효가 됩니다.  
※ 고객연용사이트(http://www.callab.co.kr)에서 성적서의 진위여부 확인이 가능합니다.  
※ 성적서의 원본은 상단에 HCT로로그램이 들어간 위변조 방지 용지에 인쇄되어 발급되며, 원본 복사시에는 복사본이라는 표시가 처리됩니다.


**교정결과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61926  
교정번호(Calibration No) : C-2019-072382

페이지(page) : 2 of 3

1. Conversion Loss Graph

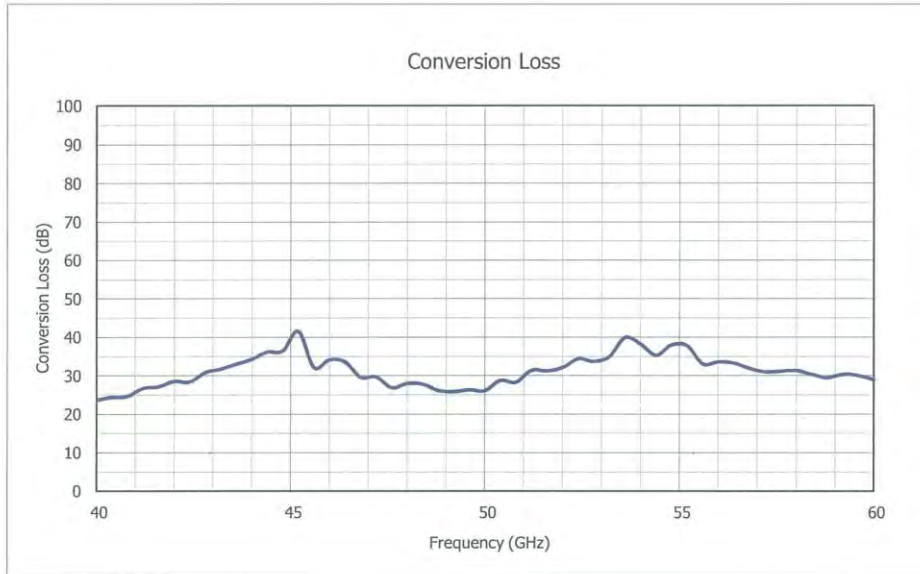

Note 1) R&S FSW (SN 104544)와 함께 교정된 결과임

Note 2) 측정 조건 : RF = -25 dBm, Harmonic Order = 4, L.O. Level = 17 dBm, Bias Value = 5.70 mA

F-02P-02-008 (Rev.02)



**교정결과**  
CALIBRATION RESULT



성적서발급번호(Certificate No) : IC-2019-61926  
교 정 번 호(Calibration No) : C-2019-072382


페이지(page) : 3 of 3

2. Conversion Loss Data

Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)	Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)
40.0	23.65	0.82	50.4	28.72	0.82
40.4	24.34	0.82	50.8	28.23	0.82
40.8	24.60	0.82	51.2	31.34	0.82
41.2	26.66	0.82	51.6	31.20	0.82
41.6	27.09	0.82	52.0	32.06	0.82
42.0	28.53	0.82	52.4	34.37	0.82
42.4	28.34	0.82	52.8	33.68	0.82
42.8	30.76	0.82	53.2	34.90	0.82
43.2	31.68	0.82	53.6	39.85	0.82
43.6	32.96	0.82	54.0	38.19	0.82
44.0	34.25	0.82	54.4	35.26	0.82
44.4	36.11	0.82	54.8	37.95	0.82
44.8	36.44	0.82	55.2	37.75	0.82
45.2	41.54	0.82	55.6	33.01	0.82
45.6	32.09	0.82	56.0	33.52	0.82
46.0	34.08	0.82	56.4	33.25	0.82
46.4	33.55	0.82	56.8	31.86	0.82
46.8	29.56	0.82	57.2	30.94	0.82
47.2	29.65	0.82	57.6	31.10	0.82
47.6	26.82	0.82	58.0	31.32	0.82
48.0	27.93	0.82	58.4	30.30	0.82
48.4	27.76	0.82	58.8	29.42	0.82
48.8	26.09	0.82	59.2	30.32	0.82
49.2	25.79	0.82	59.6	30.00	0.82
49.6	26.30	0.82	60.0	28.87	0.82
50.0	26.06	0.82	-	-	-

끝.

F-02P-02-008 (Rev.02)

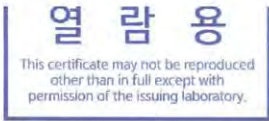

## 점검성적서

### CHECK REPORTS

경기도 이천시 마장면 서이천로 578번길 74  
Tel : 031-645-6900, Fax : 031-645-6969

성적서발급번호(Certificate No) : IC-2019-63578  
점검번호(Checks No) : C-2019-074396

페이지(page) : 1 of 3

**1. 의뢰자 (Client)**

- 기관명 (Name) : (주)에이치시티  
- 주소 (Address) : 경기도 이천시 마장면 서이천로 578번길 74

**2. 측정기 (Check Subject)**

◇ 등록번호 : 288237

- 기기명 (Description) : WR-05 HARMONIC MIXER  
- 제작회사 및 형식(Manufacturer and Model Name) : OML / M05HWD  
- 기기번호 (Serial Number) : 160419-1

**3. 점검일자 (Date of Check)**

: 2019.09.09

**4. 점검환경 (Environment Conditions)**

- 온도(Temperature) : ( 23.2 ± 0.4 ) °C - 습도(Humidity) : ( 50 ± 2 ) % R.H.  
- 점검장소 (Location) : 고정표준실(Permanent Calibration Lab)

**5. 측정표준의 소급성 (Traceability)**

점검방법 및 소급성 서술 (Check method and/or brief description)

상기 기기는 고주파 스펙트럼 분석기의 교정절차(HCT-CS-125-40641)에 따라 국가측정표준기관으로부터 측정의 소급성이 확보된 아래의 아래의 표준장비와 자체 점검된 장비를 이용하여 점검 되었음.

점검에 사용한 표준장비 명세 (List of used standards/specifications)

기기명 (Description)	제작회사 및 형식 (Manufacturer and Model Name)	기기번호 (Serial Number)	차기교정예정일자 (The due date of next Calibration)	교정기관 (Calibration laboratory)
EXG ANALOG SIGNAL GENERATOR	KEYSIGHT N5173B	MY53270544	2019/10/04	(주)에이치시티
ERICKSON POWER METER	VDI PM5	394V	점검	(주)에이치시티
WR-05 MULTIPLIER SOURCE MODULE	OML S05MS-A	160419-1	점검	(주)에이치시티

**6. 점검결과 (Check result)**

: 점검결과 참조 (Refer to attachment)

<b>확 인</b> (affirmation)	작성자 (checks performed by)	승인자 (Approved by)
	성명 (Name) : 박민지	직위 (Title) 기술책임자(Technical Cal. Manager) (장)
		성명 (Name) 이승찬

위 점검결과는 국가교정기관 제정제도 운영요령 제41조 규정에 의거하여 국가측정표준과 소급성이 확립된 측정기로써 점검한 성적서임을 증명합니다.

2019. 09. 11



(주)에이치시티 대표이사  
President, HCT Co., Ltd.



이 성적서는 측정기의 정밀정확도에 영향을 미치는 요소(과부하, 온도, 습도 등)의 급격한 변화가 발생한 경우에는 무효가 됩니다.


F-02P-02-010 (Rev.01)

## 점검결과 CHECK RESULT

성적서발급번호(Certificate No) : IC-2019-63578  
점검번호(Checks No) : C-2019-074396

페이지(page) : 2 of 3

### 1. Conversion Loss Graph

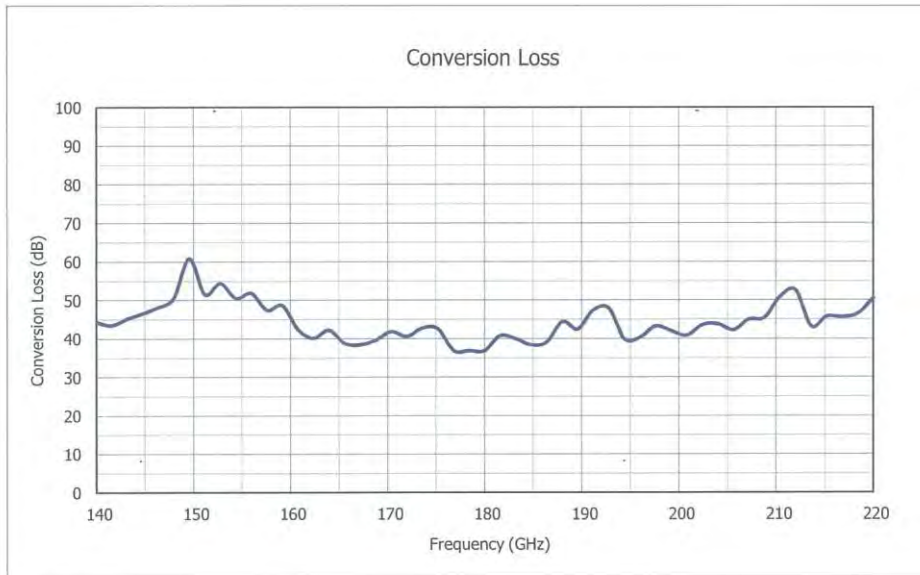

Note 1) R&S FSW (SN 104544)와 함께 교정된 결과임

Note 2) 측정 조건 : RF = -25 dBm, Harmonic Order = 16, L.O. Level = 17 dBm, Bias Value = 0.00 mA

Note 3) 110 GHz 초과 대역의 전력에 대해 국제적인 소급표준이 없으므로 HCT에서 자체적으로 소급된 기준으로 점검되었음.

- In the absence of power standards above 110 GHz, power measurements above 110 GHz are to confirm operation functionality and traceable only to HCT.

F-02P-02-010 (Rev.01)



## 점검결과

### CHECK RESULT

성적서발급번호(Certificate No) : IC-2019-63578

페이지(page) : 3 of 3

점검번호(Checks No) : C-2019-074396

#### 2. Conversion Loss Data

Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)	Frequency (GHz)	Conversion Loss (dB)	Measurement Uncertainty (dB)
140.0	44.3	0.86	181.6	40.7	0.86
141.6	43.5	0.86	183.2	39.9	0.86
143.2	45.2	0.86	184.8	38.3	0.86
144.8	46.5	0.86	186.4	39.1	0.86
146.4	48.2	0.86	188.0	44.4	0.86
148.0	50.6	0.86	189.6	42.5	0.86
149.6	60.8	0.86	191.2	47.4	0.86
151.2	51.5	0.86	192.8	47.8	0.86
152.8	54.4	0.86	194.4	39.9	0.86
154.4	50.5	0.86	196.0	40.3	0.86
156.0	51.8	0.86	197.6	43.2	0.86
157.6	47.4	0.86	199.2	42.0	0.86
159.2	48.6	0.86	200.8	40.8	0.86
160.8	42.4	0.86	202.4	43.5	0.86
162.4	40.1	0.86	204.0	43.8	0.86
164.0	42.2	0.86	205.6	42.3	0.86
165.6	38.8	0.86	207.2	45.0	0.86
167.2	38.4	0.86	208.8	45.4	0.86
168.8	39.6	0.86	210.4	50.9	0.86
170.4	41.9	0.86	212.0	52.5	0.86
172.0	40.6	0.86	213.6	43.2	0.86
173.6	42.8	0.86	215.2	45.8	0.86
175.2	42.5	0.86	216.8	45.6	0.86
176.8	36.9	0.86	218.4	46.5	0.86
178.4	36.9	0.86	220.0	50.5	0.87
180.0	36.9	0.86	-	-	-

끝.

F-02P-02-010 (Rev.01)

**7. Annex B\_EUT AND TEST SETUP PHOTO**

Please refer to test setup photo file no. as follows;

<b>No.</b>	<b>Description</b>
1	HCT-RF-2008-FC024-P