


Plot 6-184. Lower Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)



Plot 6-185. Lower Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 106 of 164

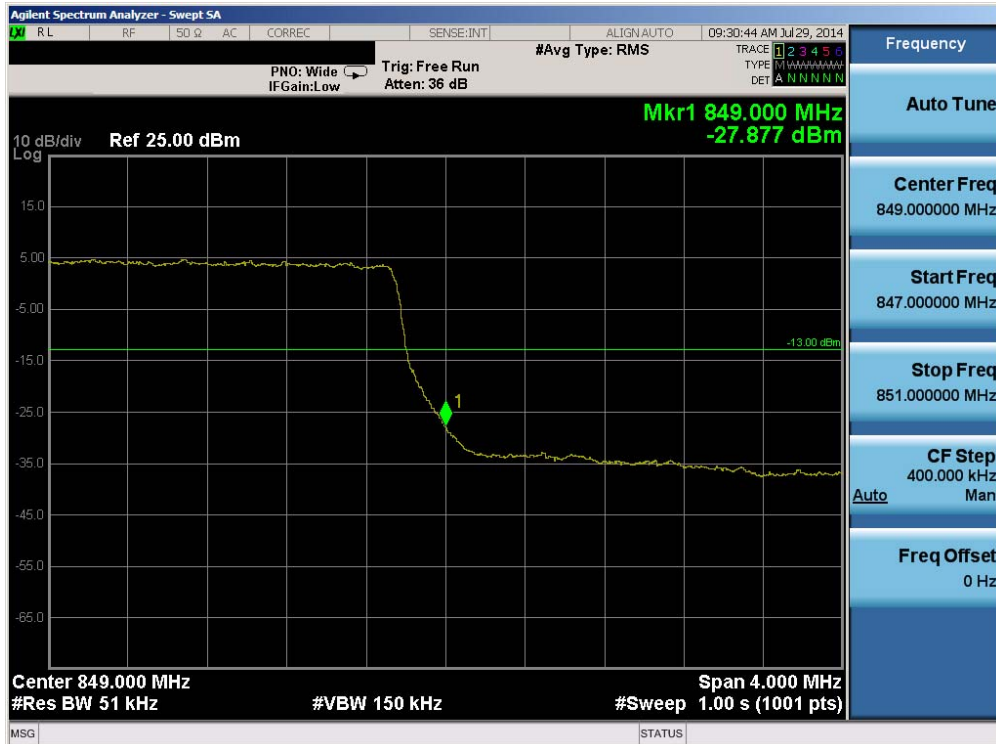


Plot 6-186. Upper Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)




Plot 6-187. Upper Extended Band Edge Plot (Band 5 – 5.0MHz QPSK – RB Size 25)

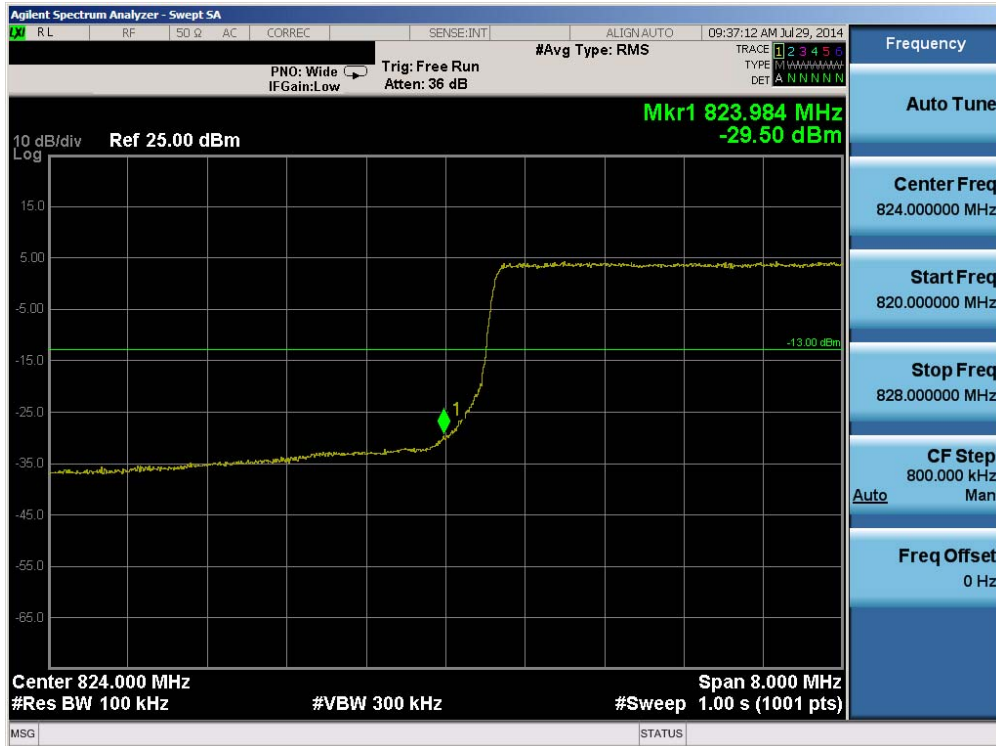

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 107 of 164

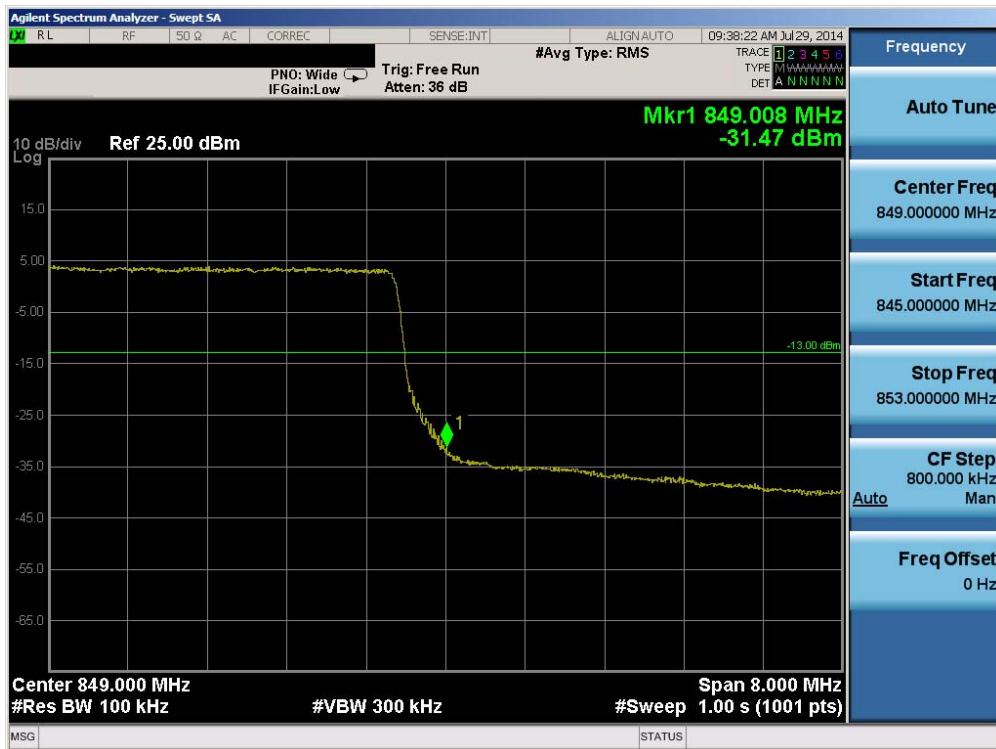


Plot 6-188. Lower Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)



Plot 6-189. Upper Band Edge Plot (Band 5 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 108 of 164

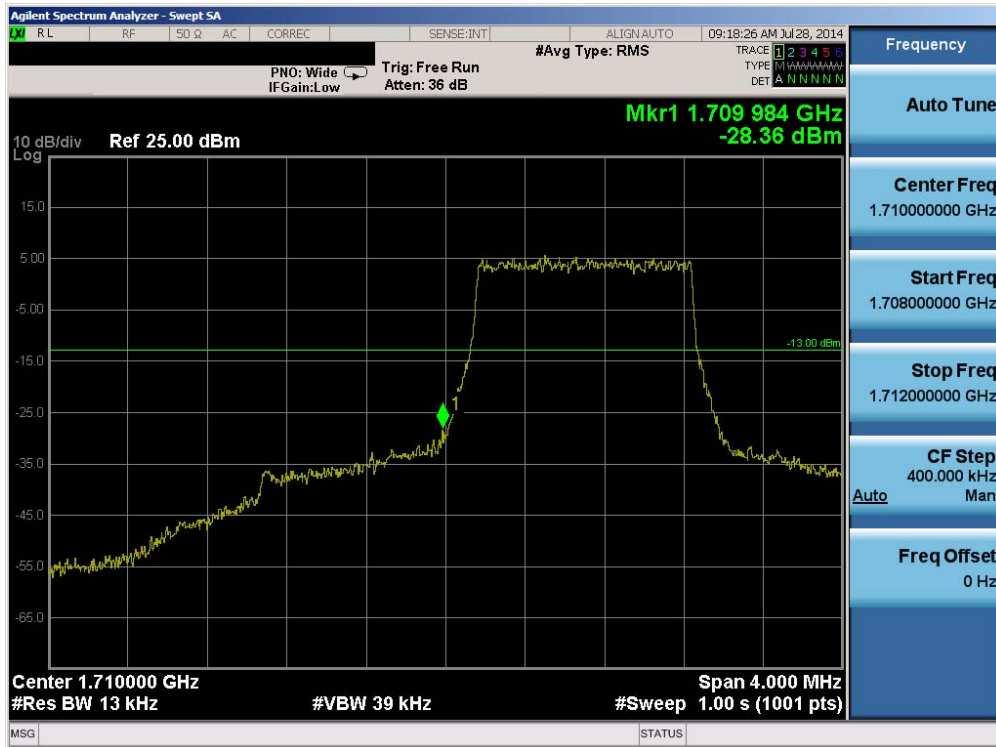

Plot 6-190. Lower Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)




Plot 6-191. Lower Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 109 of 164




Plot 6-192. Upper Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

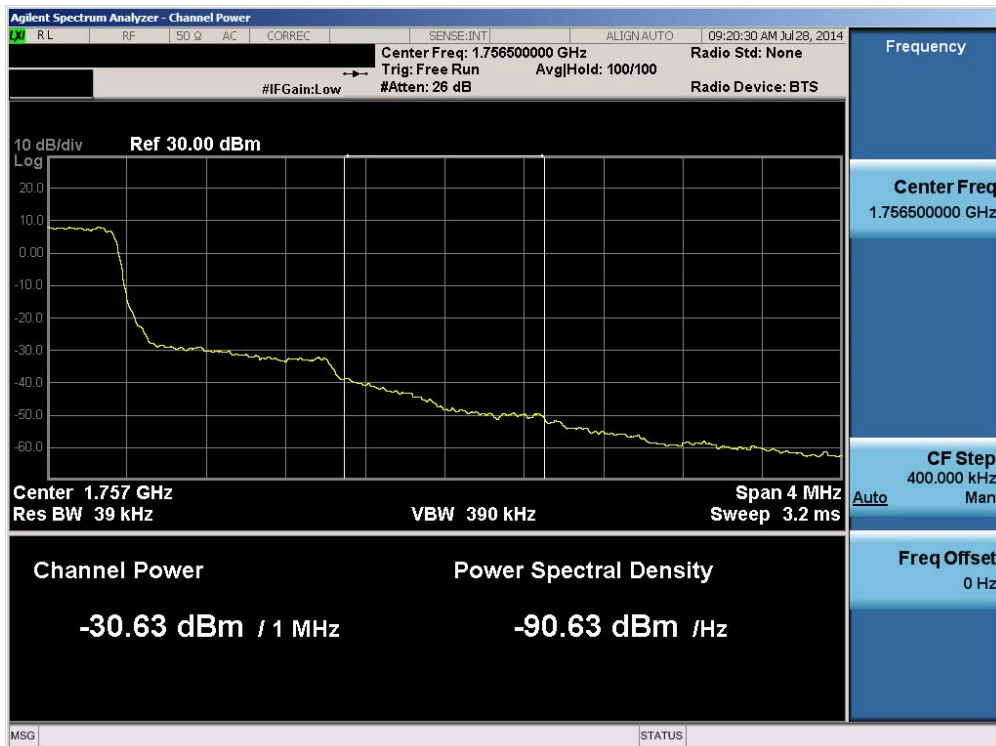


Plot 6-193. Upper Extended Band Edge Plot (Band 4 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 110 of 164

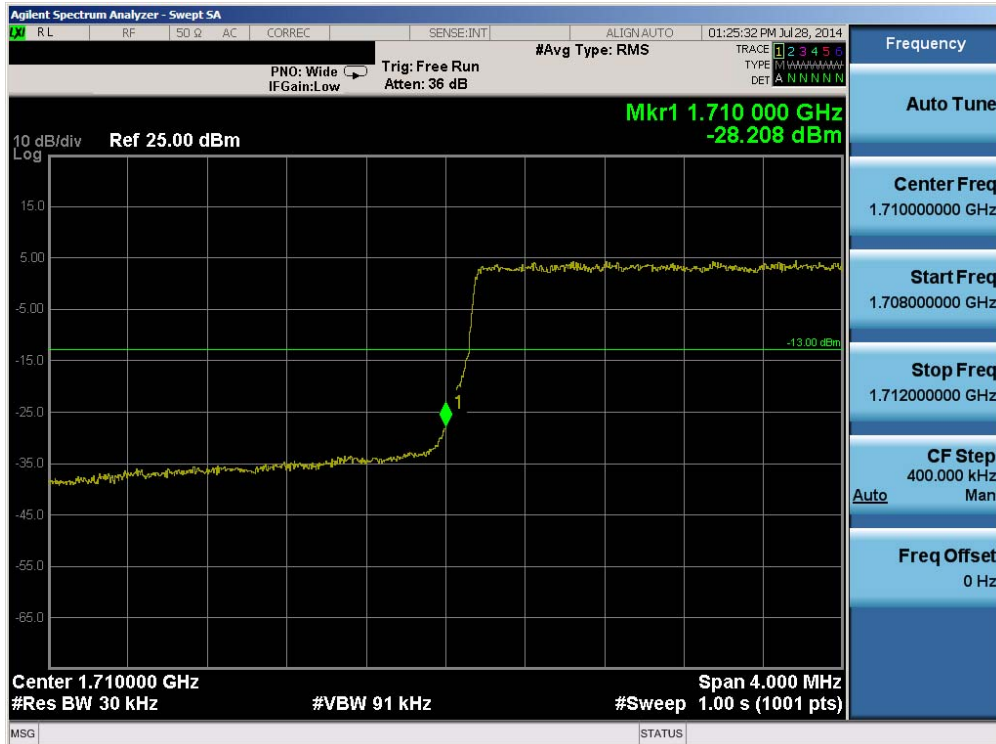


Plot 6-194. Lower Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

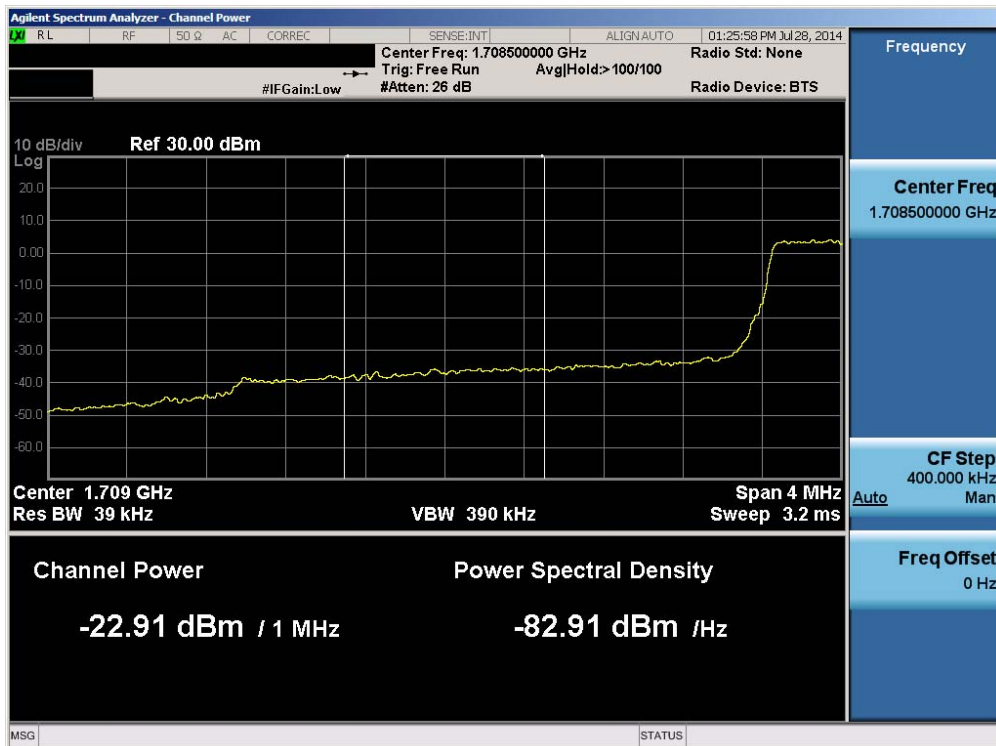


Plot 6-195. Lower Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 111 of 164

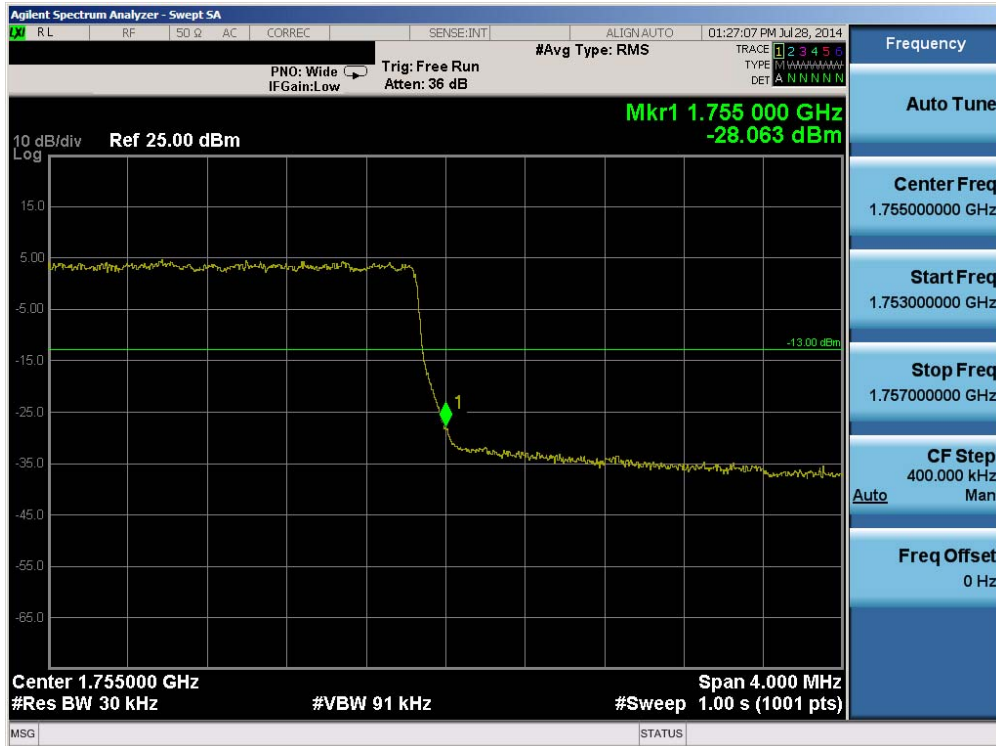


Plot 6-196. Upper Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

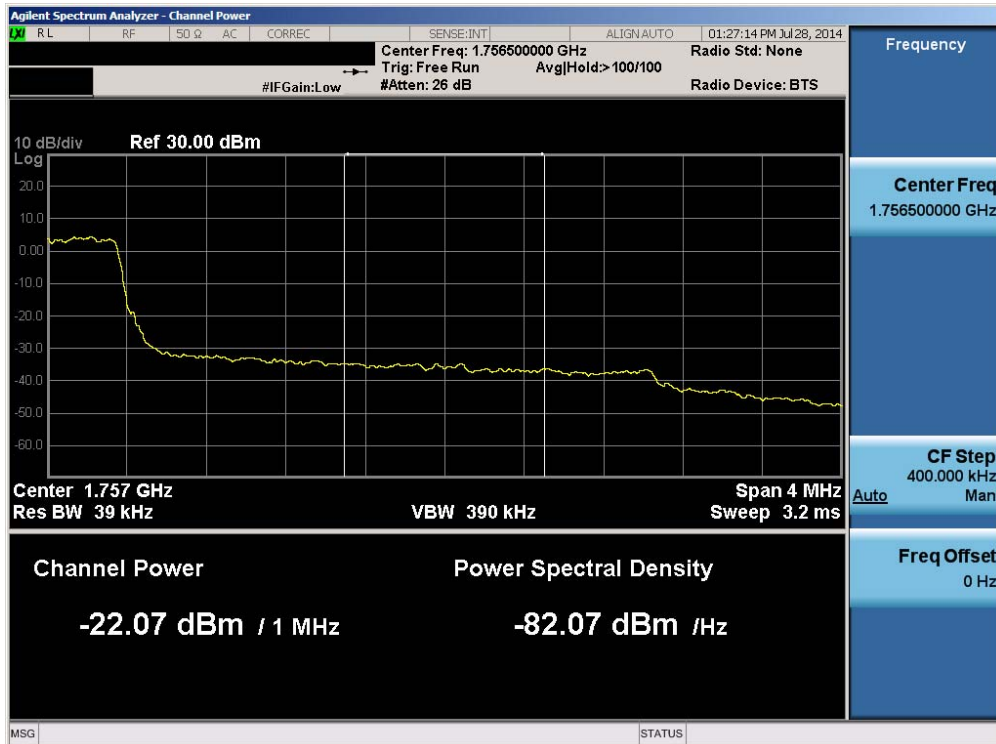


Plot 6-197. Upper Extended Band Edge Plot (Band 4 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 112 of 164

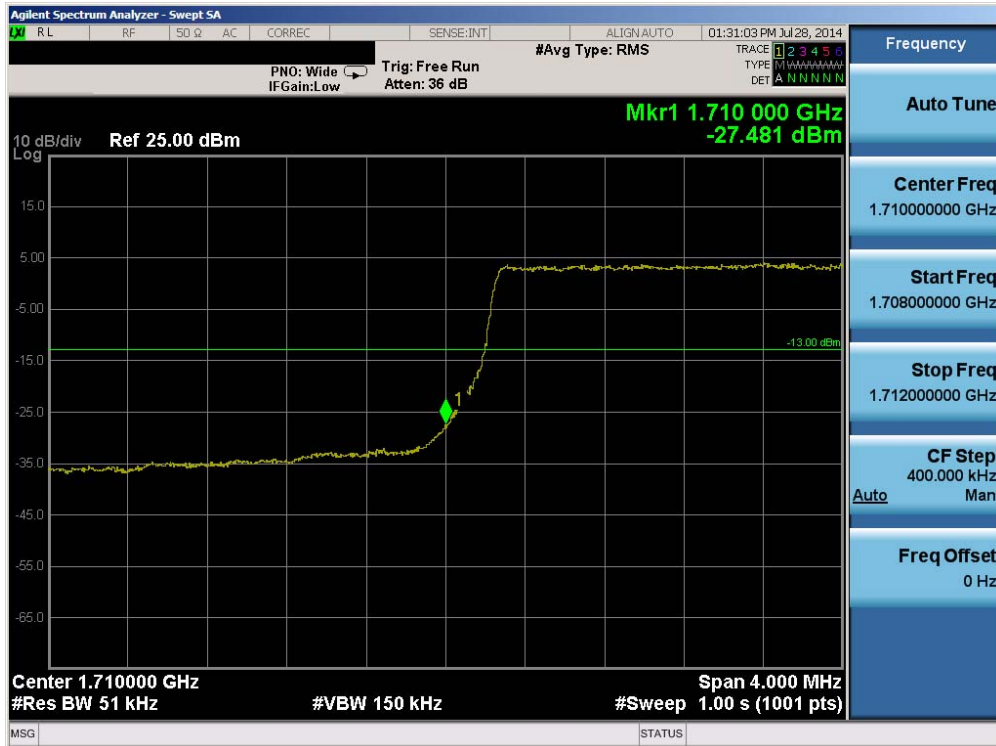


Plot 6-198. Lower Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

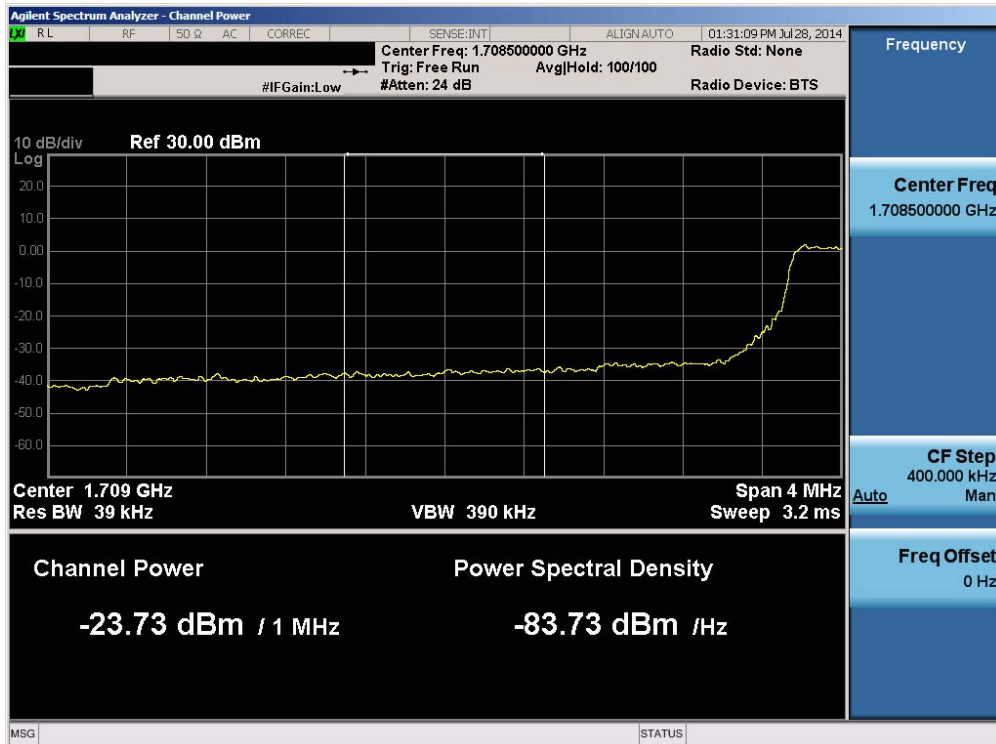


Plot 6-199. Lower Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 113 of 164

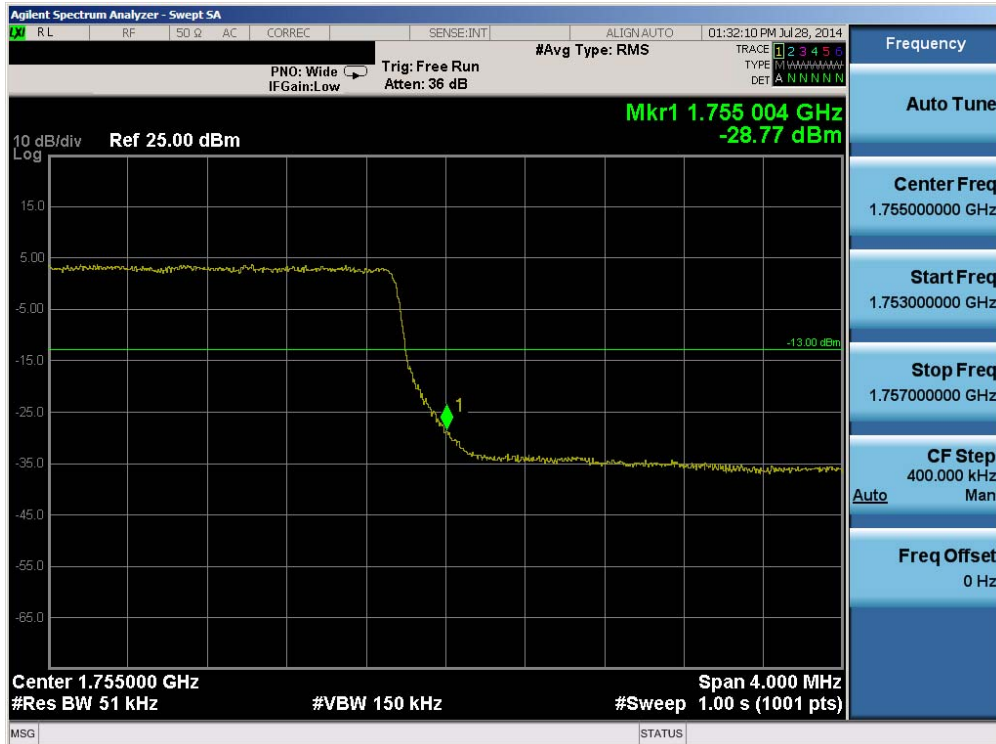


Plot 6-200. Upper Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

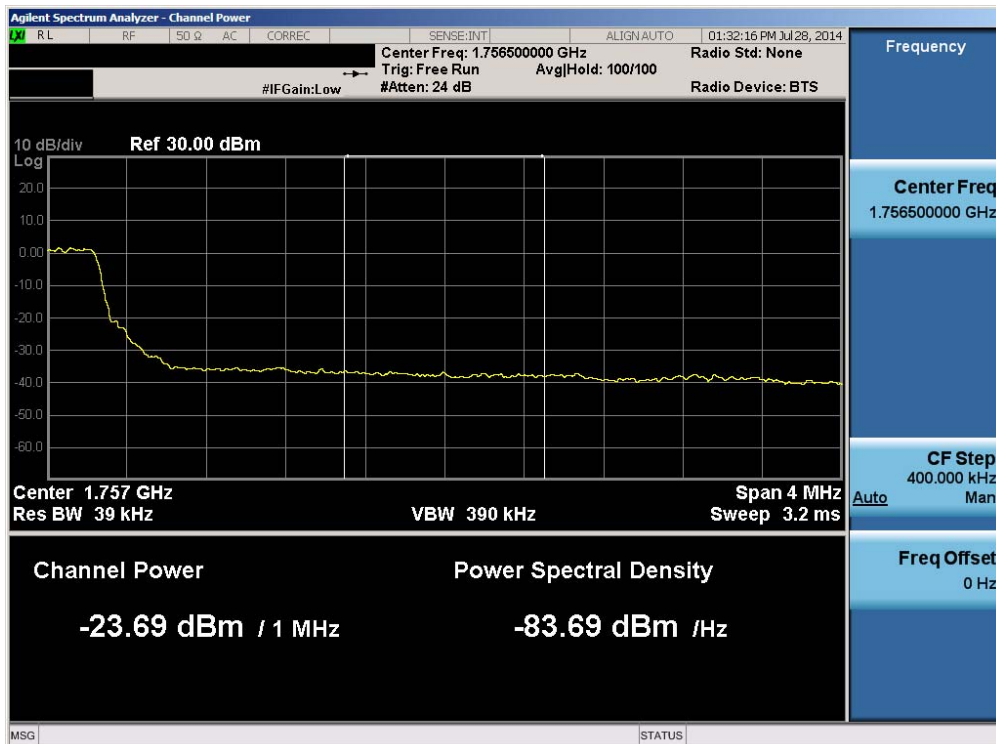


Plot 6-201. Upper Extended Band Edge Plot (Band 4 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 114 of 164

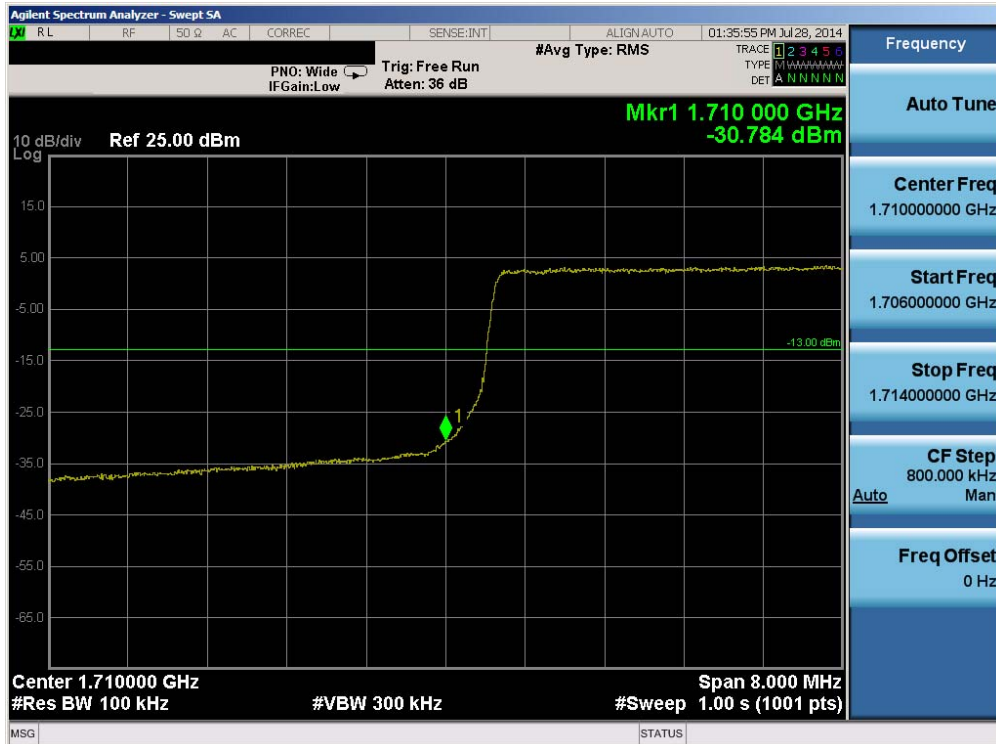


Plot 6-202. Lower Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

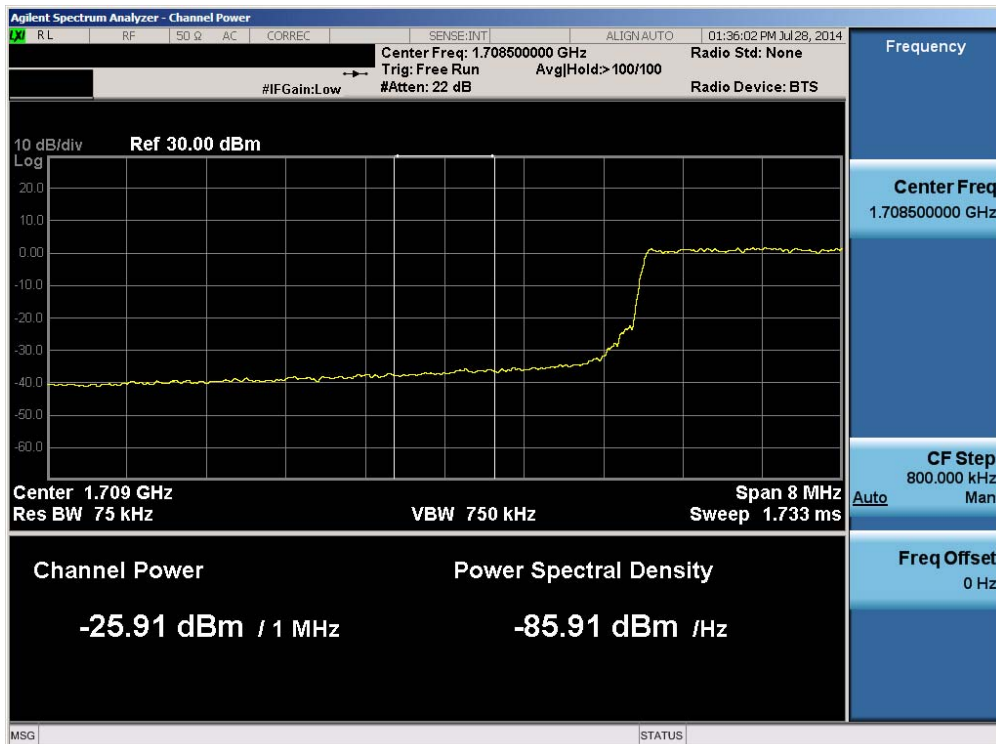


Plot 6-203. Lower Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 115 of 164

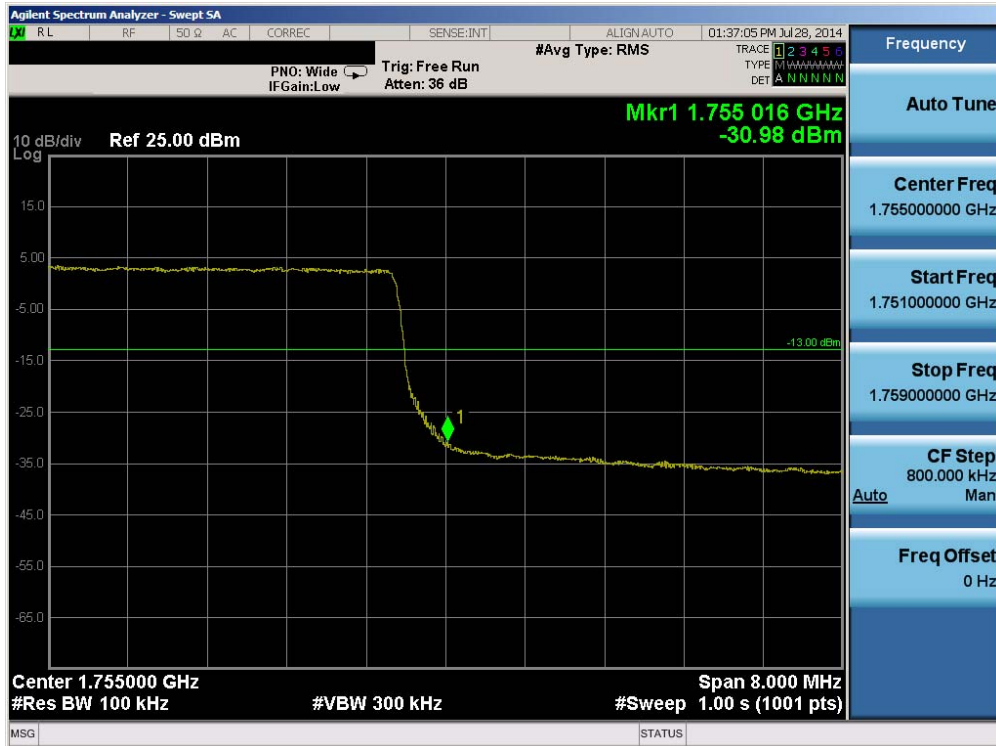


Plot 6-204. Upper Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

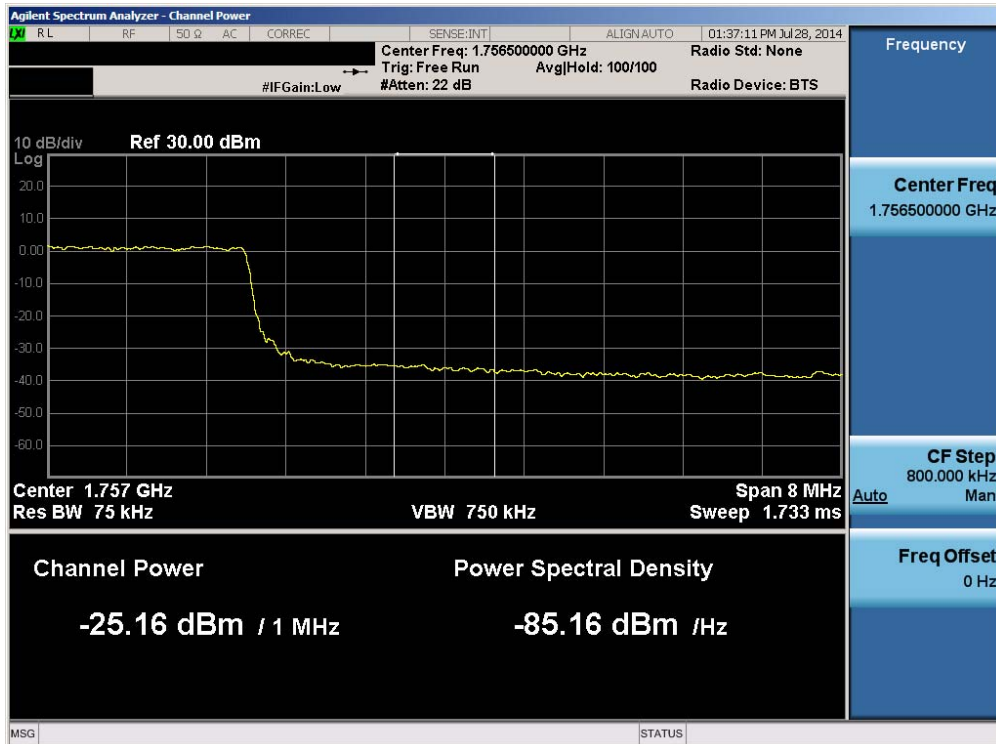


Plot 6-205. Upper Extended Band Edge Plot (Band 4 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 116 of 164

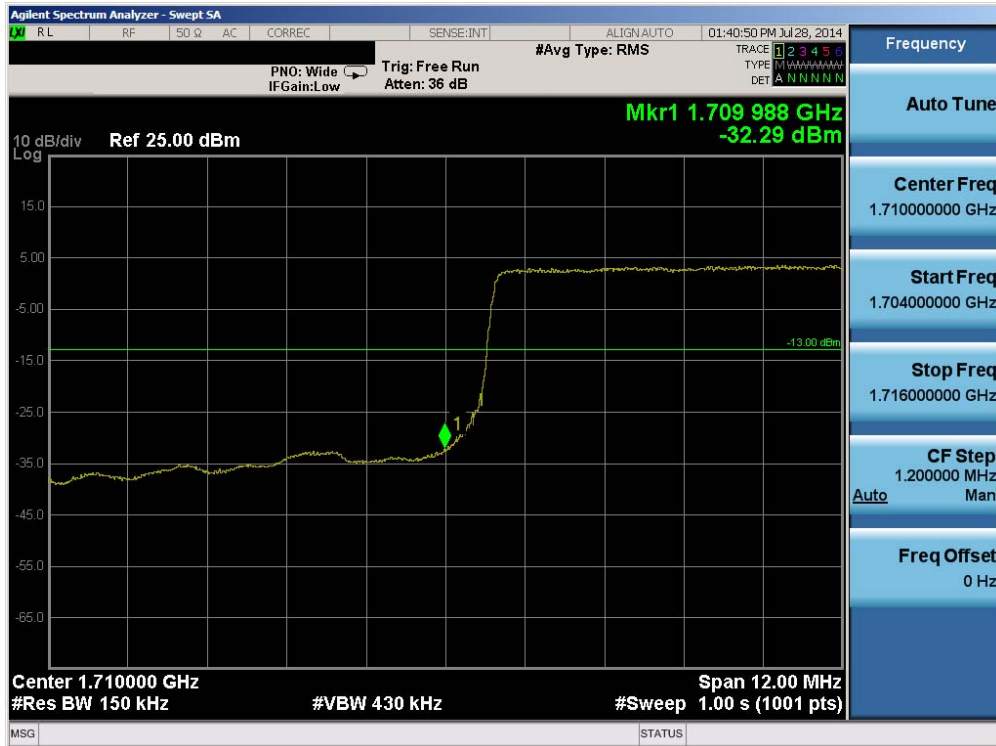


Plot 6-206. Lower Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

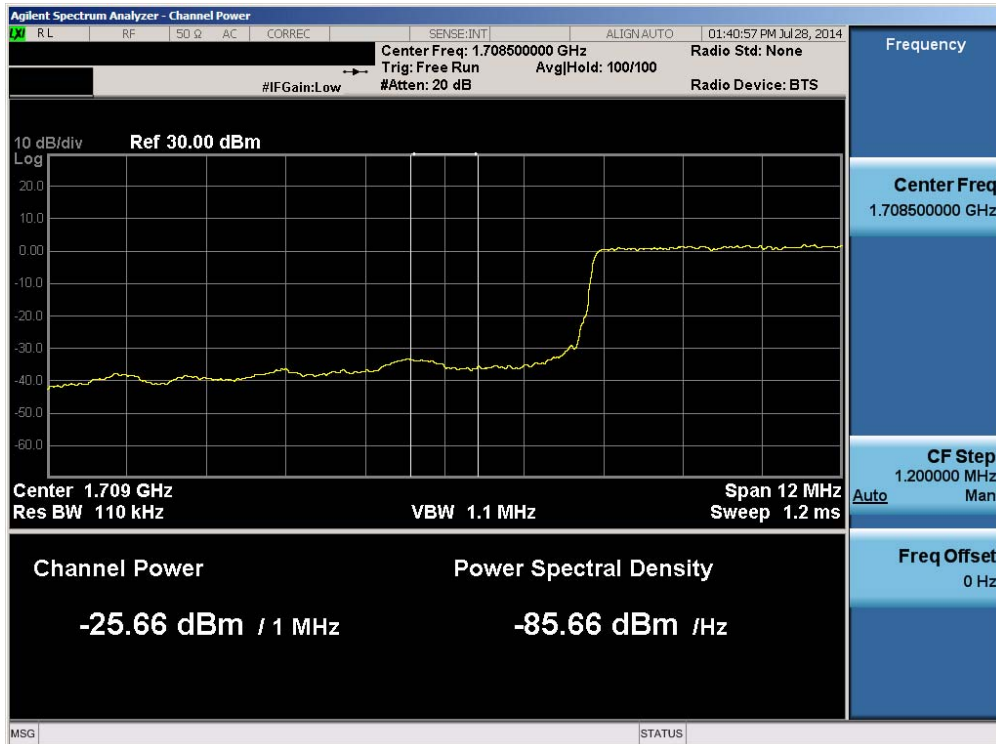


Plot 6-207. Lower Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 117 of 164

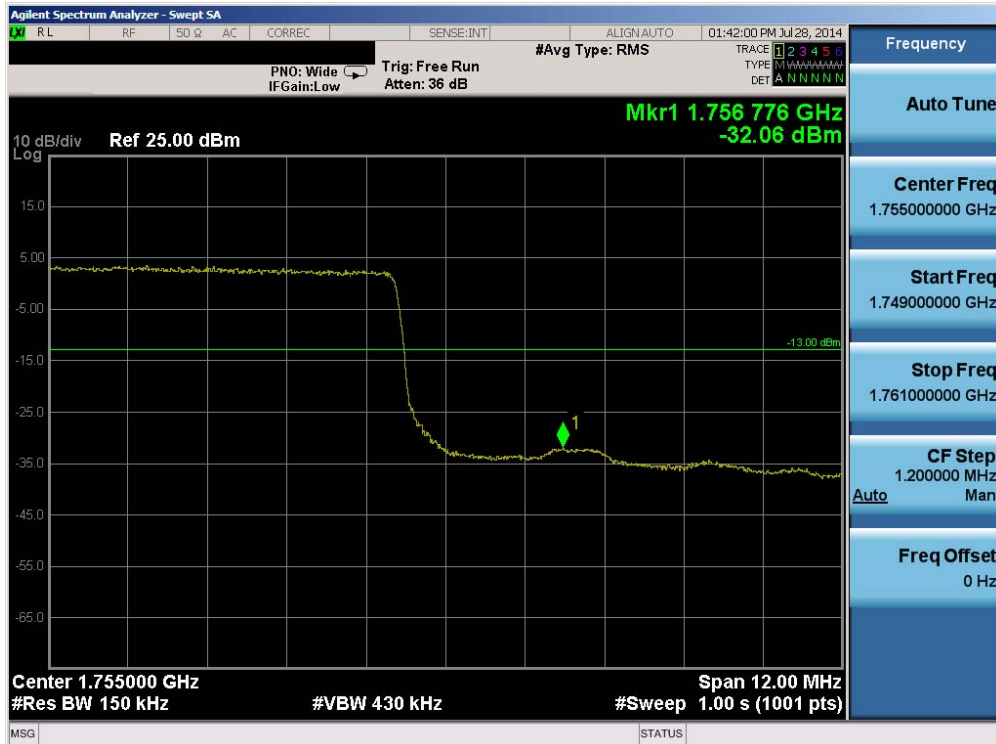


Plot 6-208. Upper Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

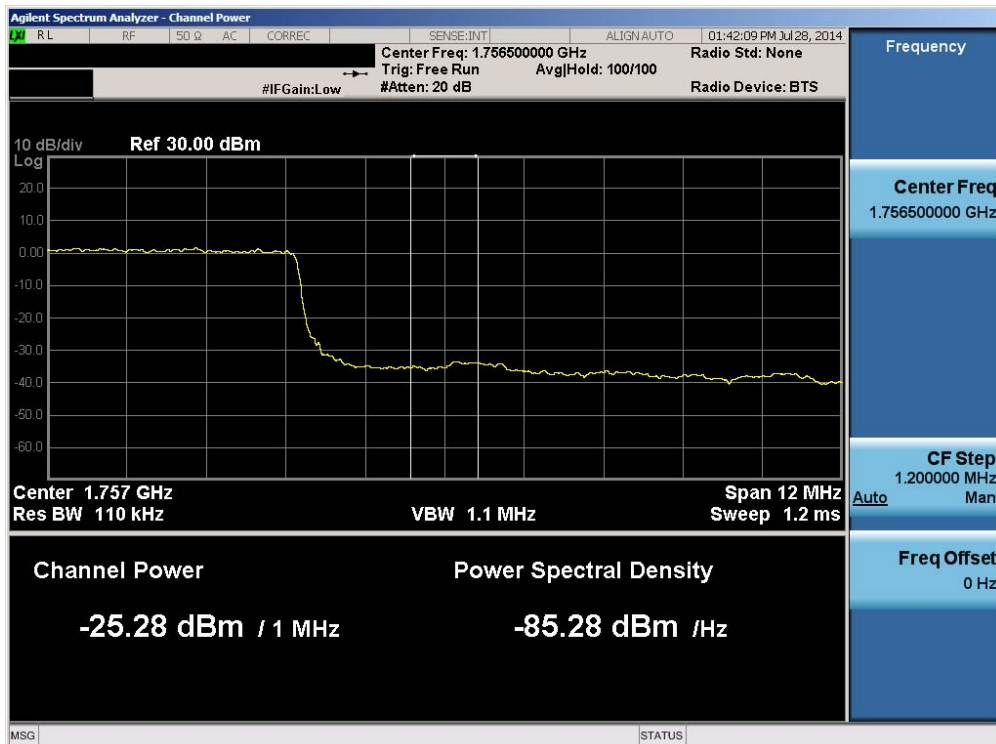


Plot 6-209. Upper Extended Band Edge Plot (Band 4 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 118 of 164

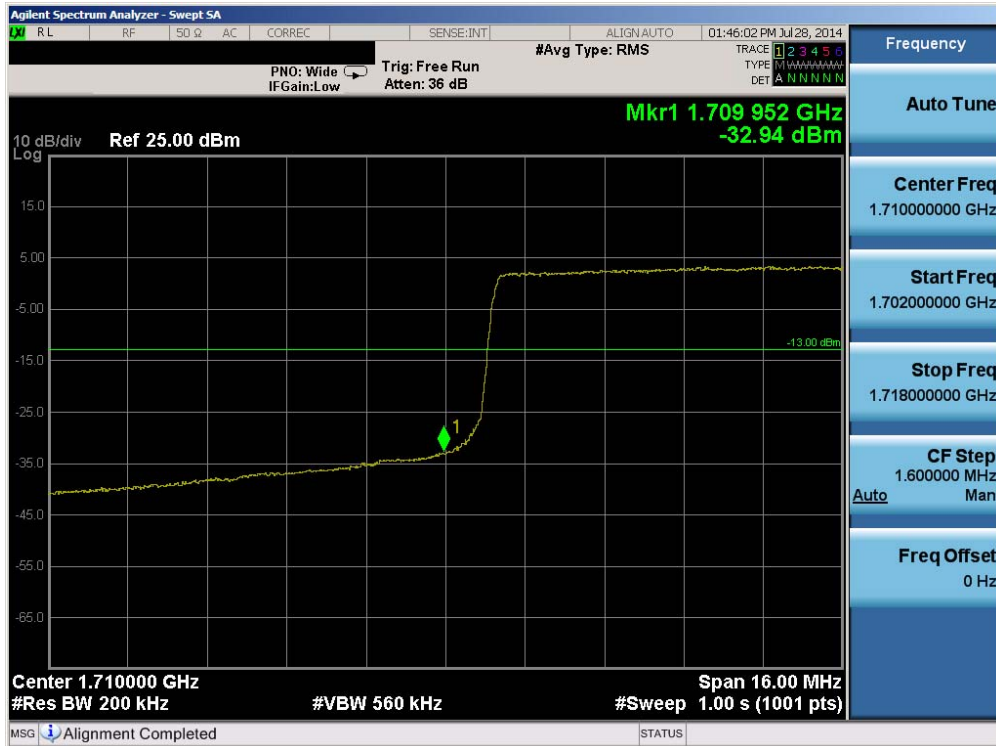


Plot 6-210. Lower Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

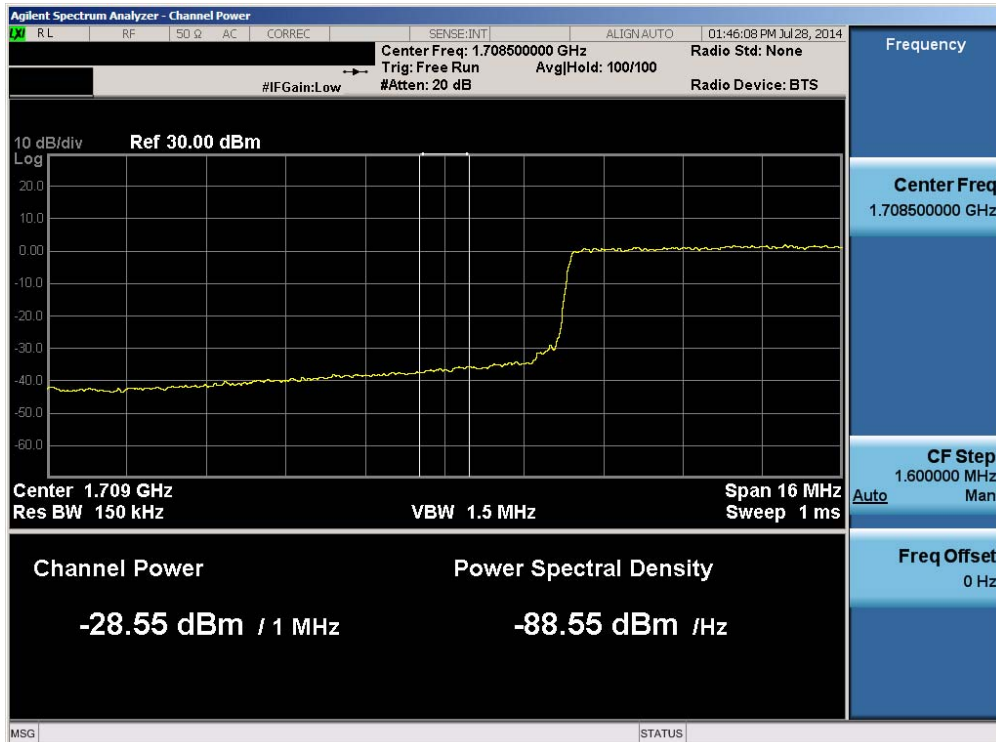


Plot 6-211. Lower Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 119 of 164

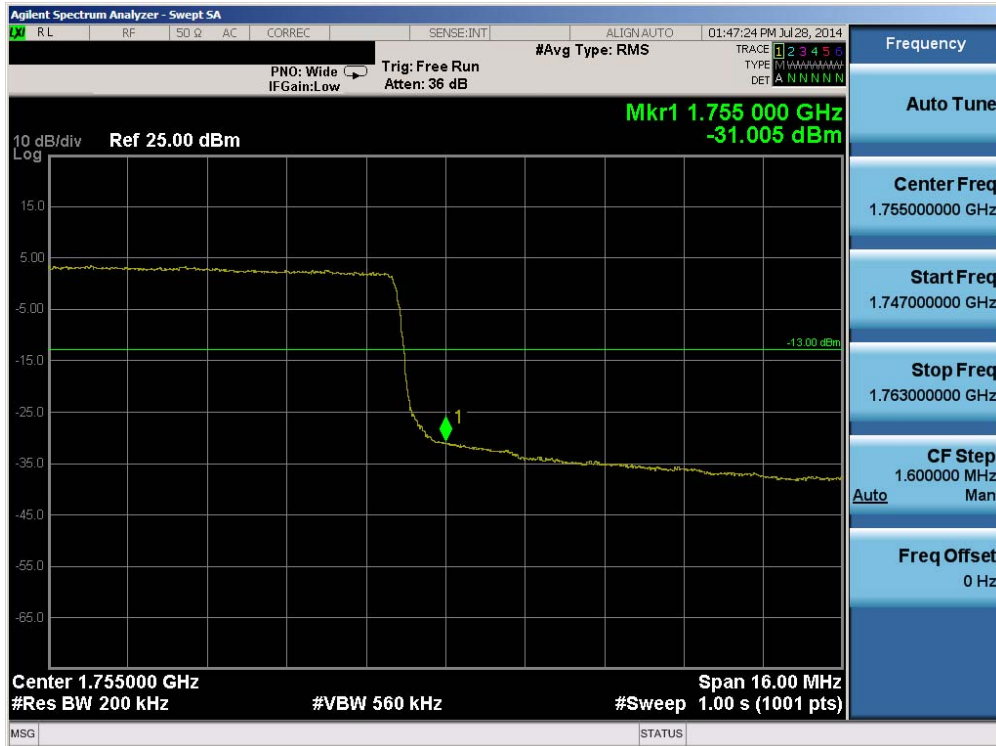


Plot 6-212. Upper Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

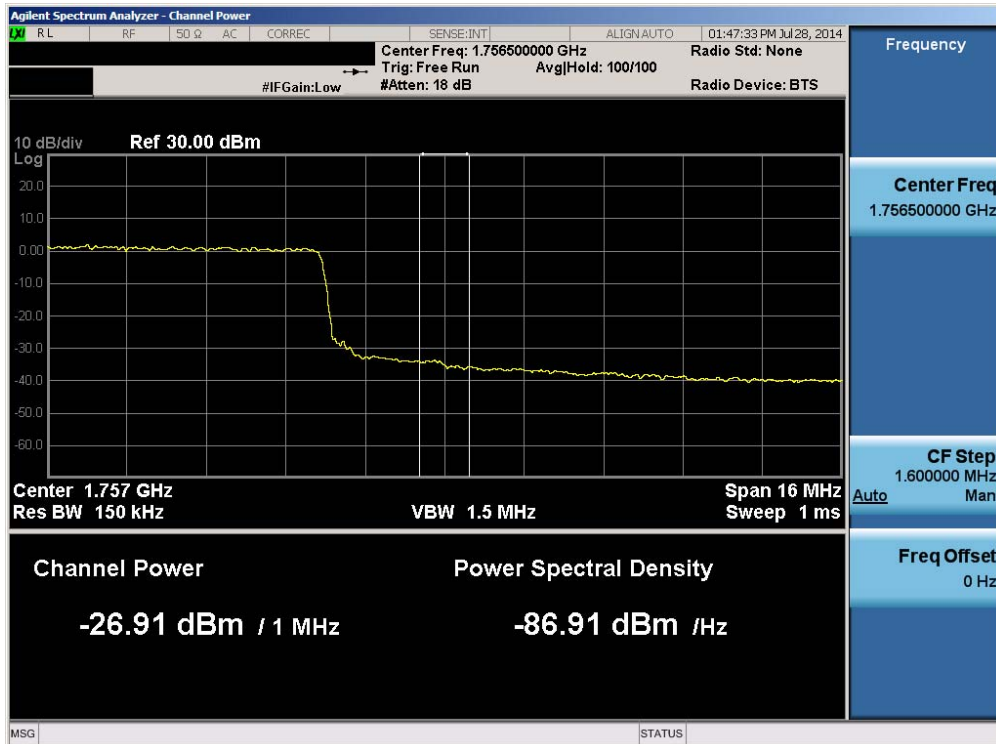


Plot 6-213. Upper Extended Band Edge Plot (Band 4 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 120 of 164

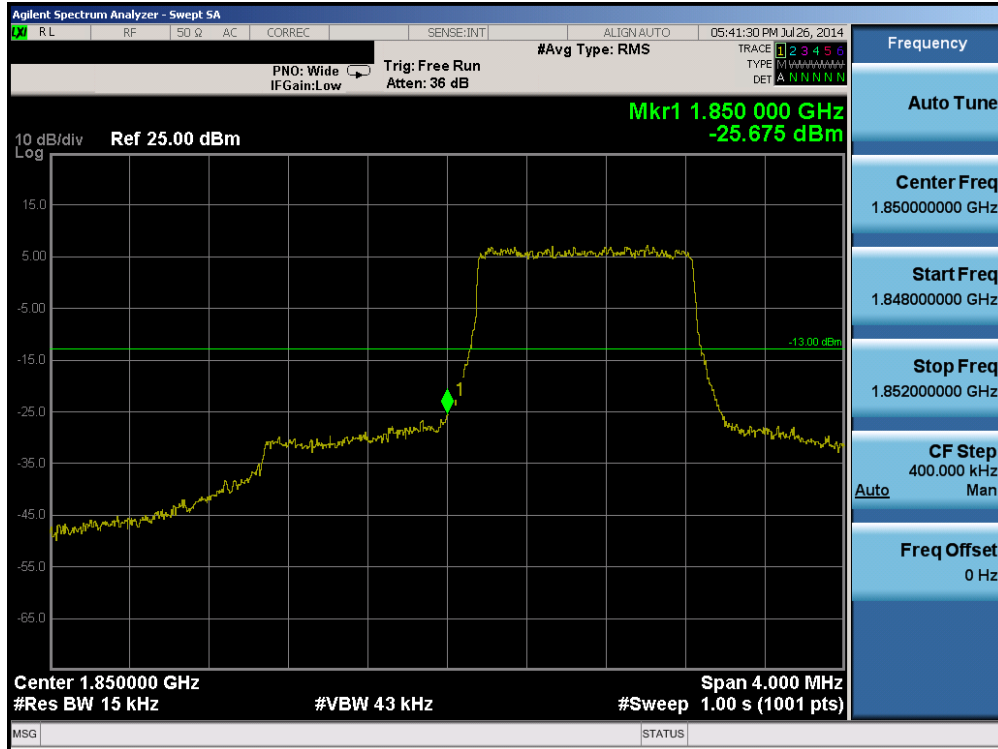


Plot 6-214. Lower Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

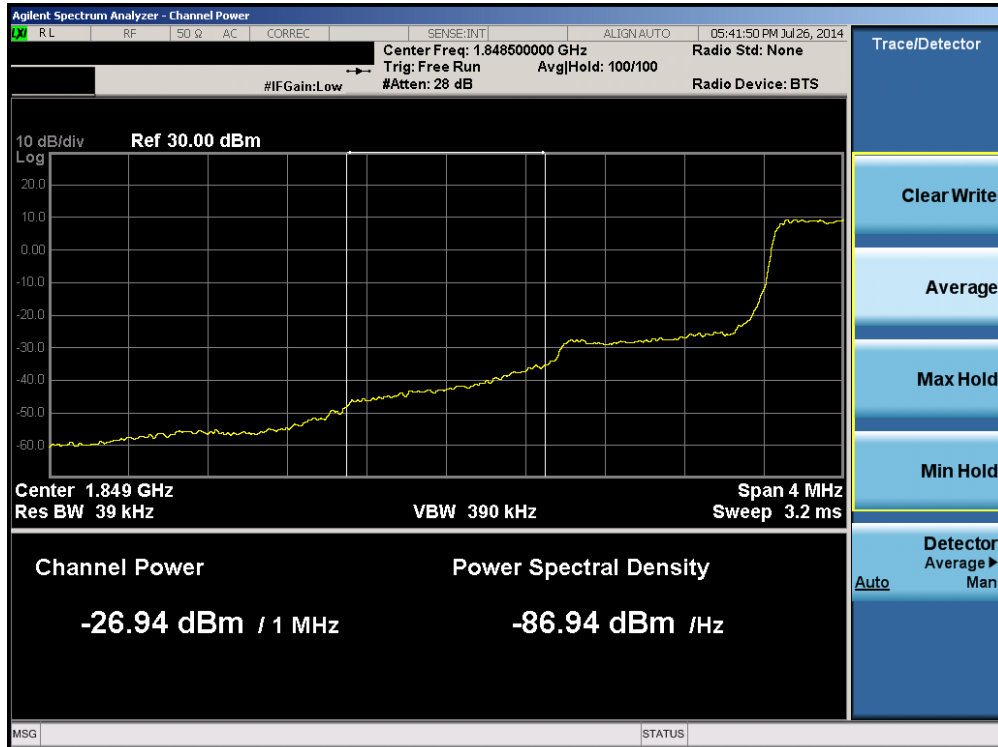


Plot 6-215. Lower Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 121 of 164

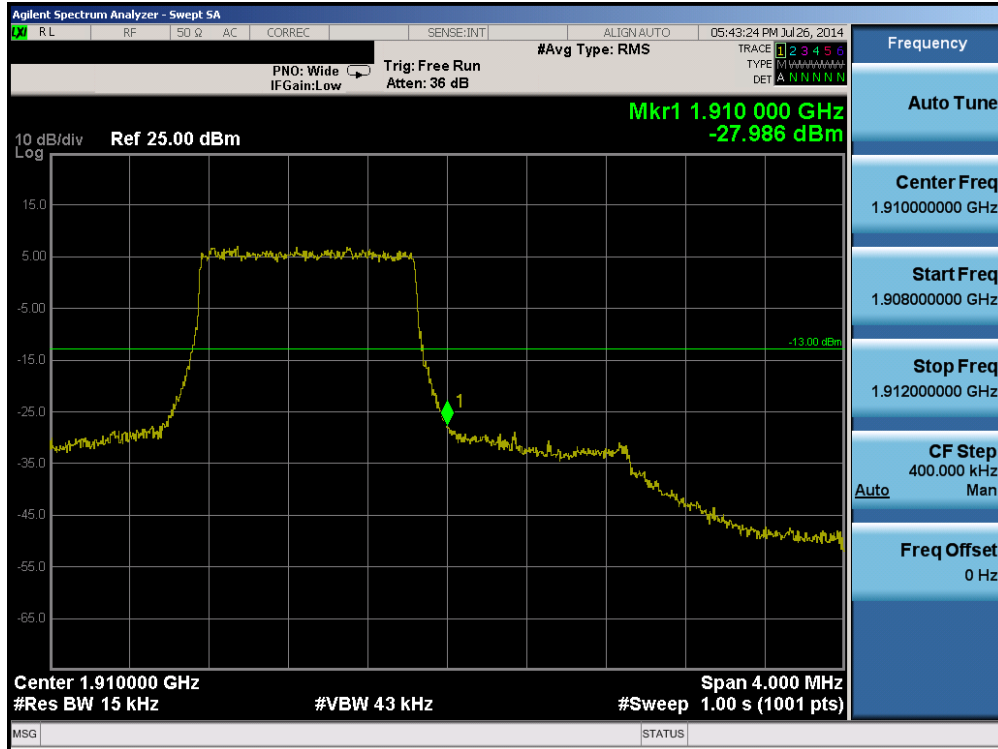


Plot 6-216. Upper Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

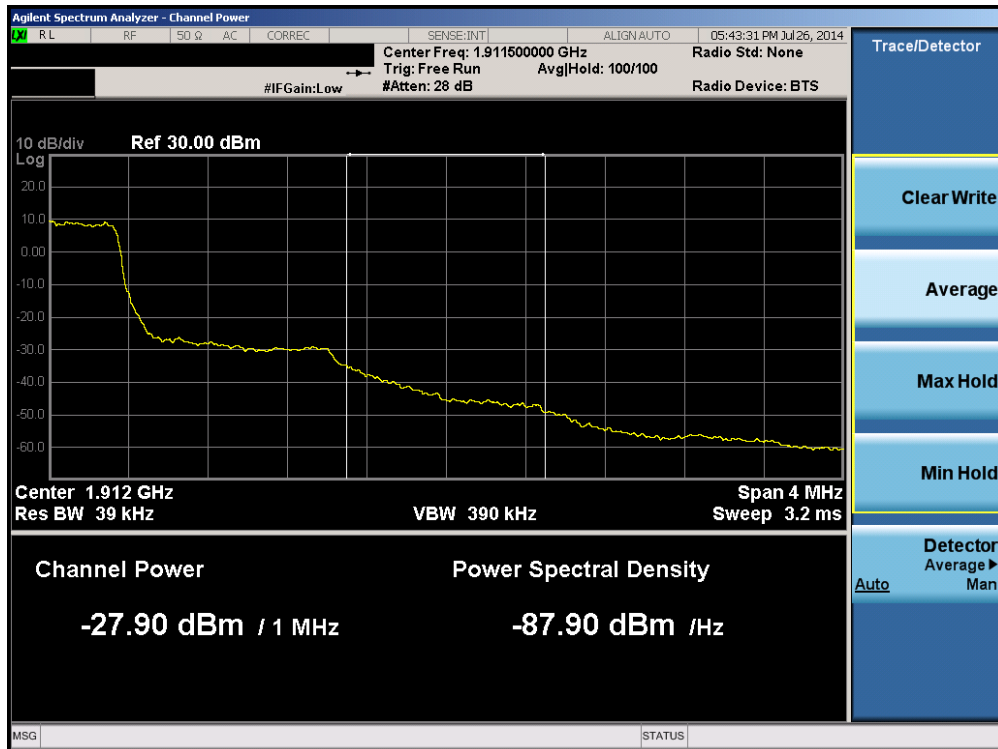


Plot 6-217. Upper Extended Band Edge Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 122 of 164

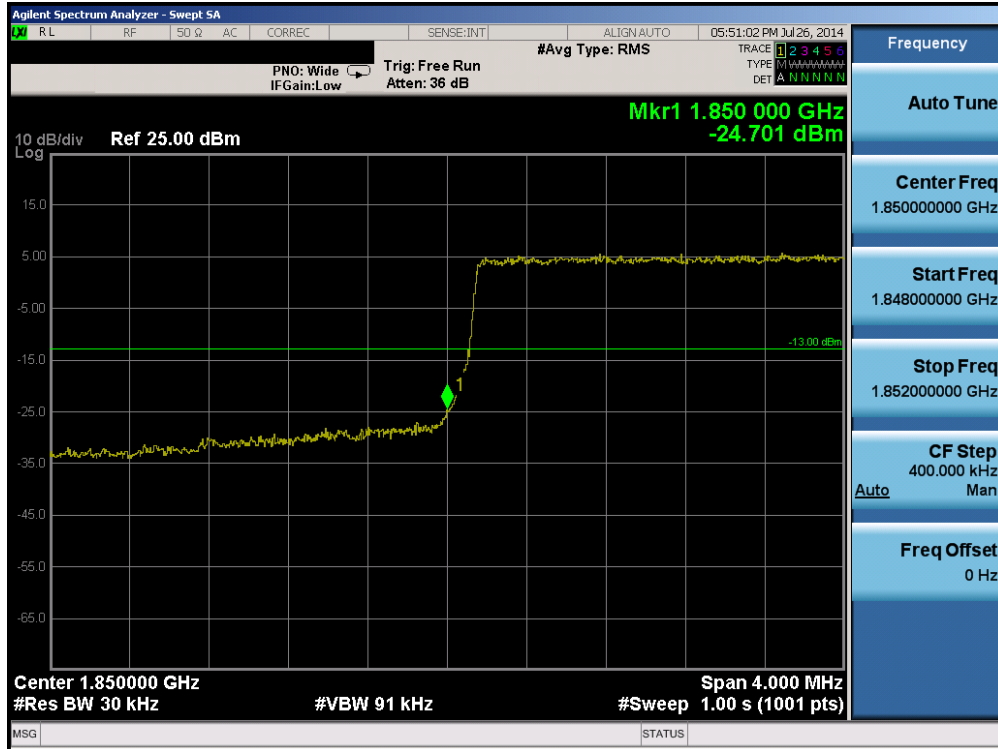

Plot 6-218. Lower Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

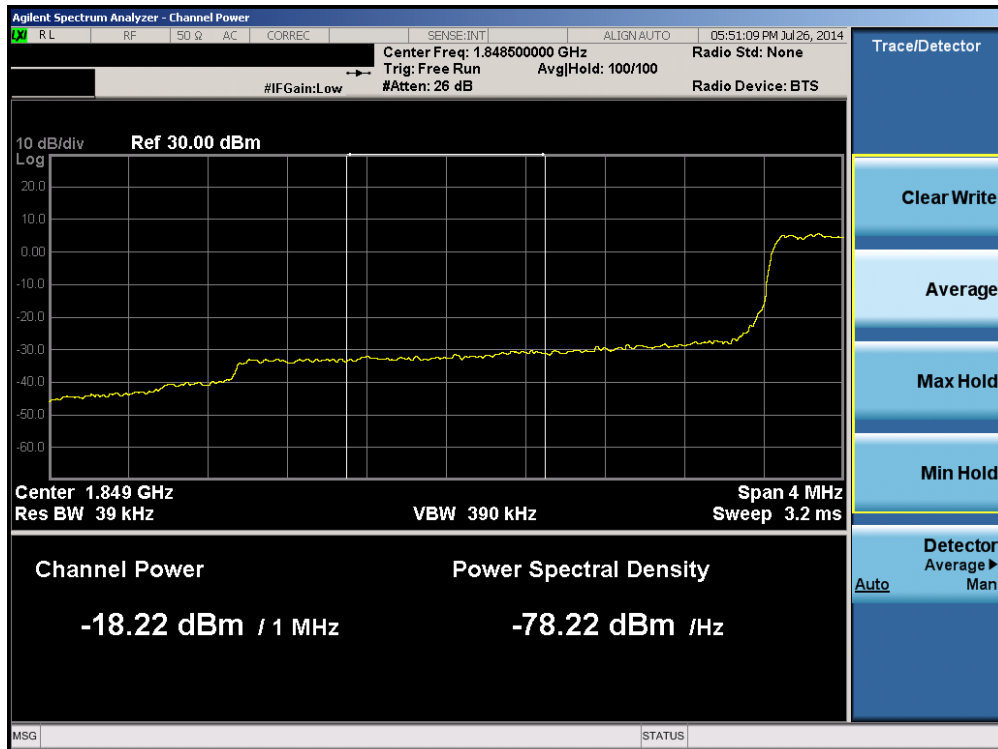


Plot 6-219. Lower Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 123 of 164




Plot 6-220. Upper Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

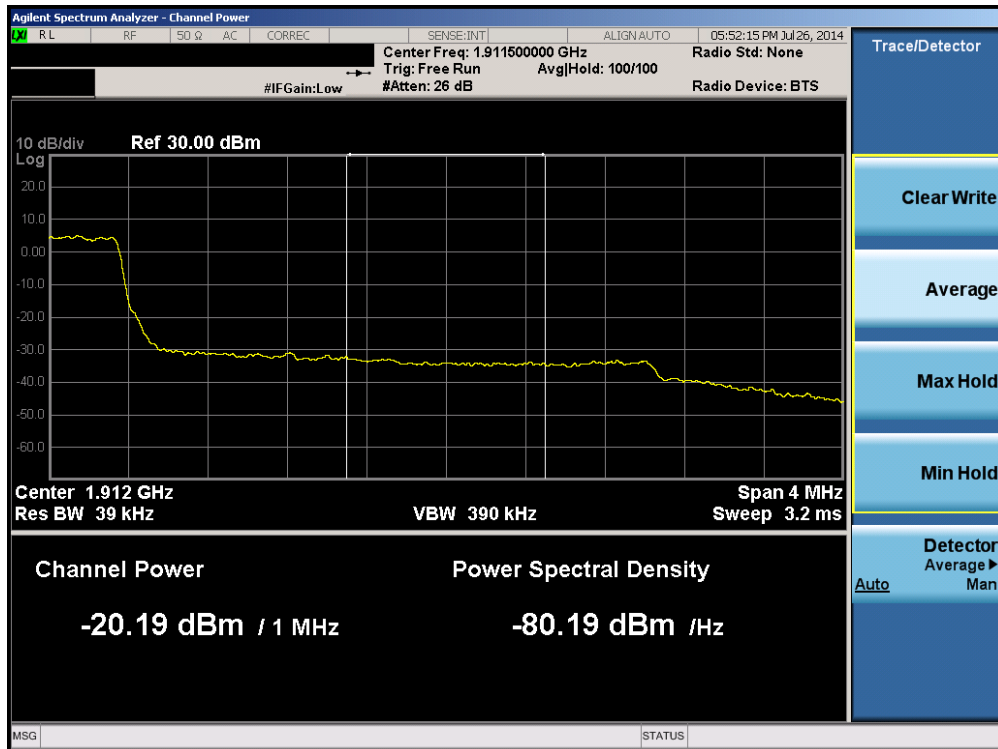


Plot 6-221. Upper Extended Band Edge Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 124 of 164

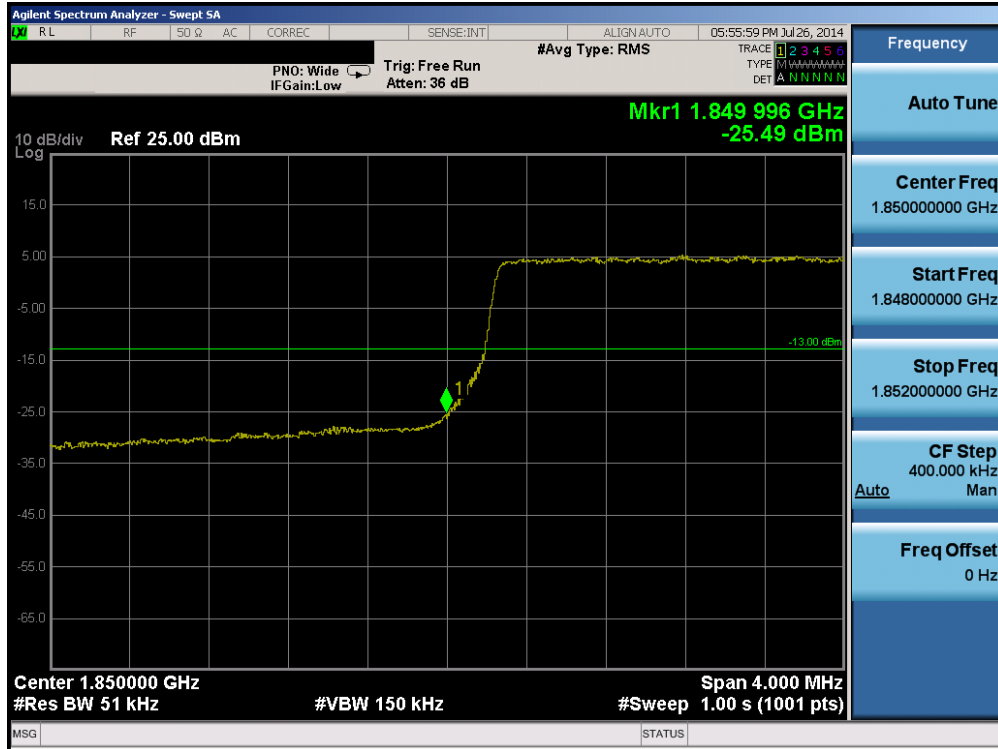


Plot 6-222. Lower Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

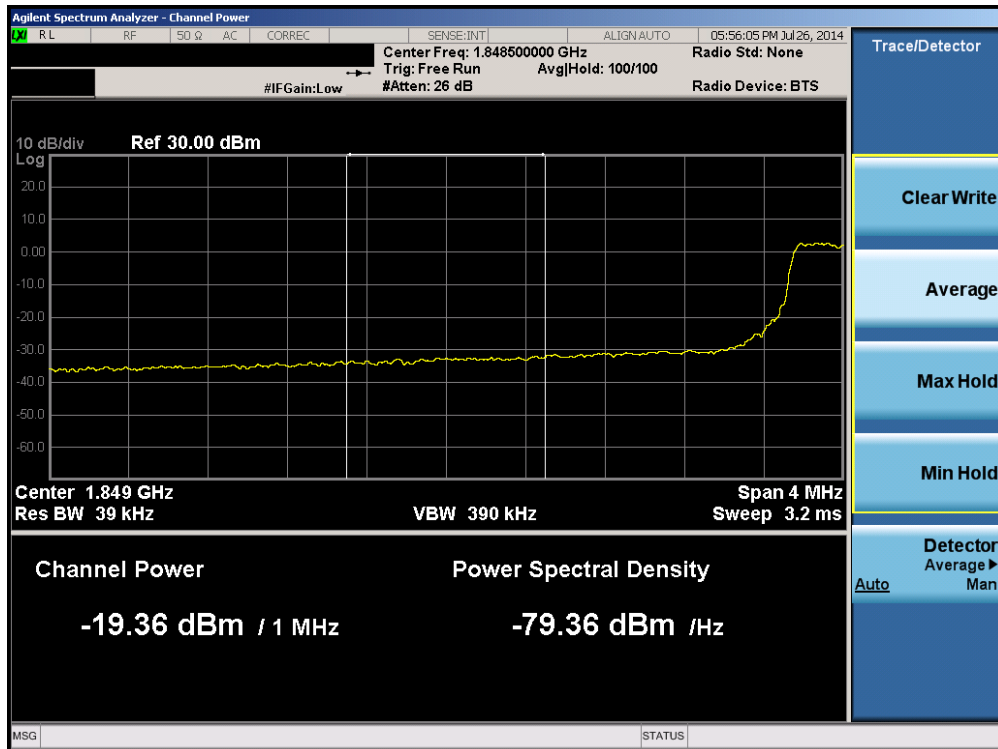


Plot 6-223. Lower Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 125 of 164

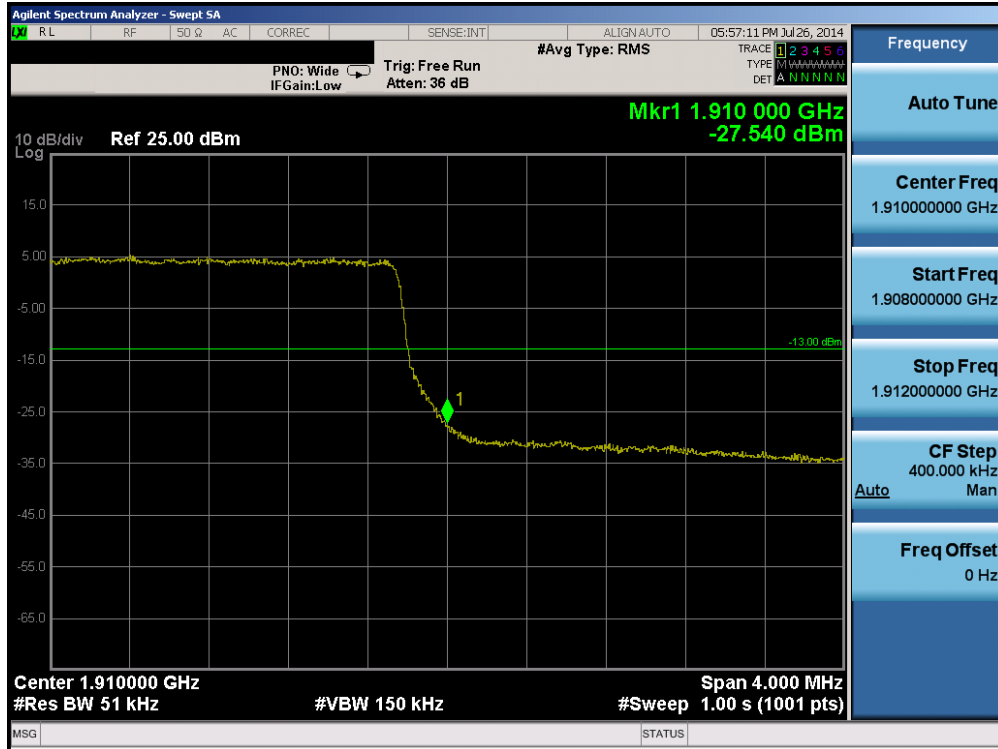


Plot 6-224. Upper Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

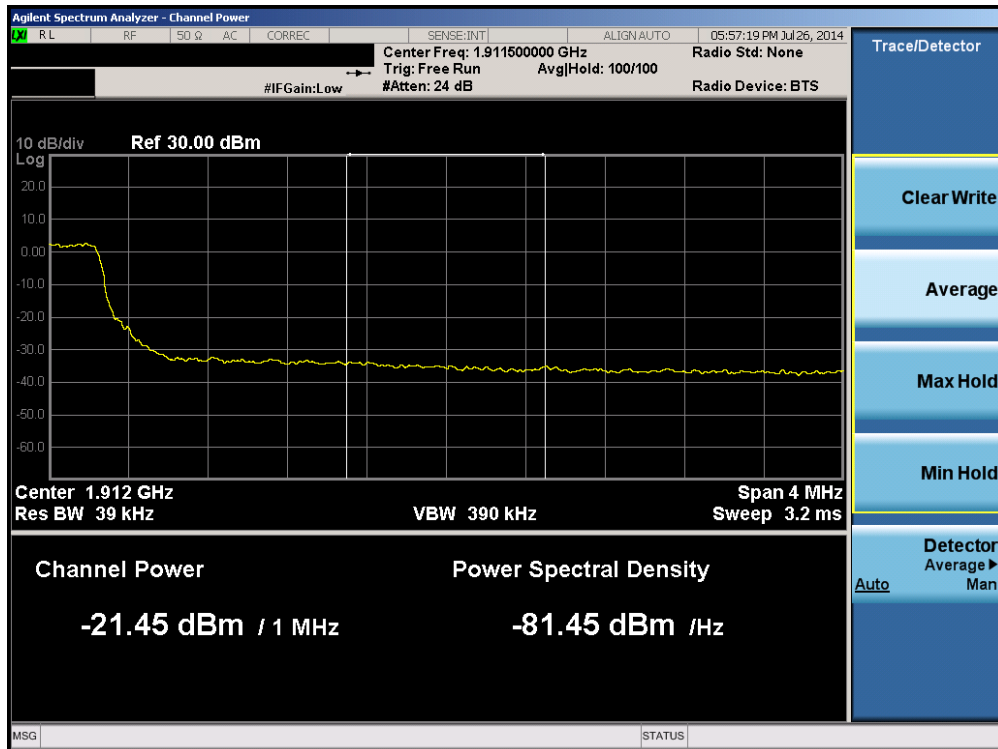


Plot 6-225. Upper Extended Band Edge Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 126 of 164

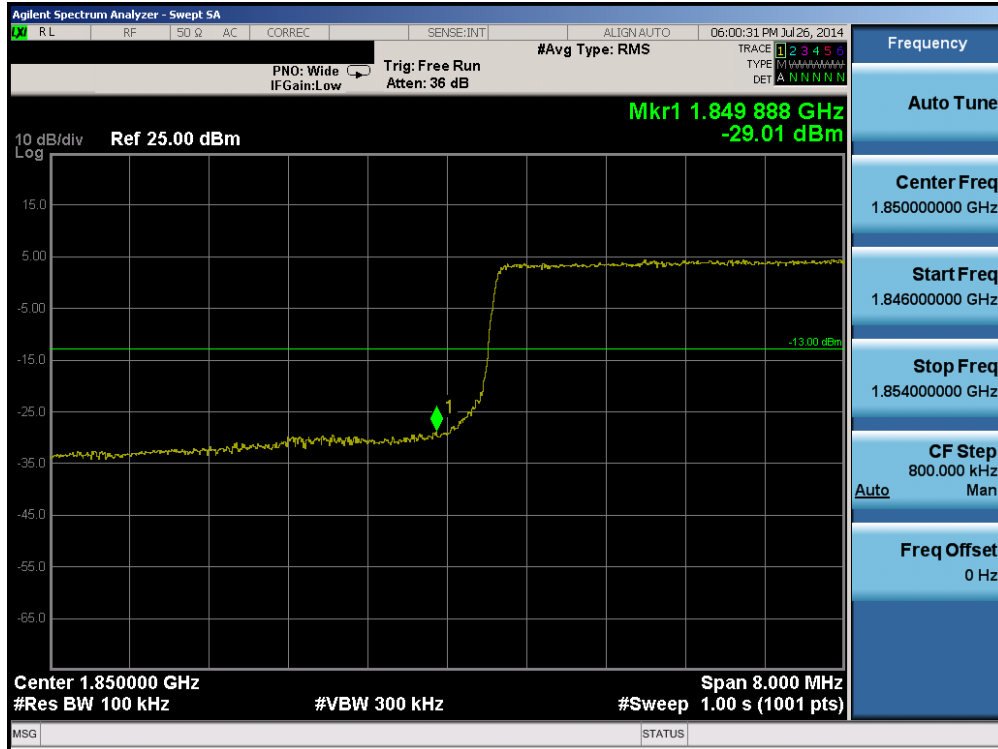


Plot 6-226. Lower Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

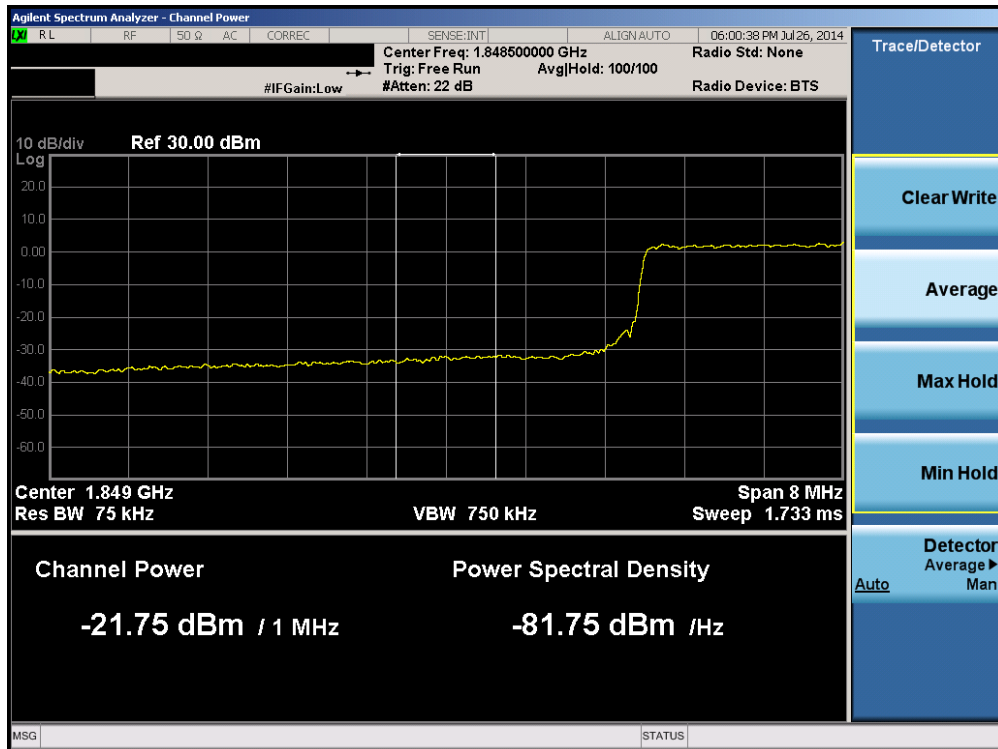


Plot 6-227. Lower Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 127 of 164

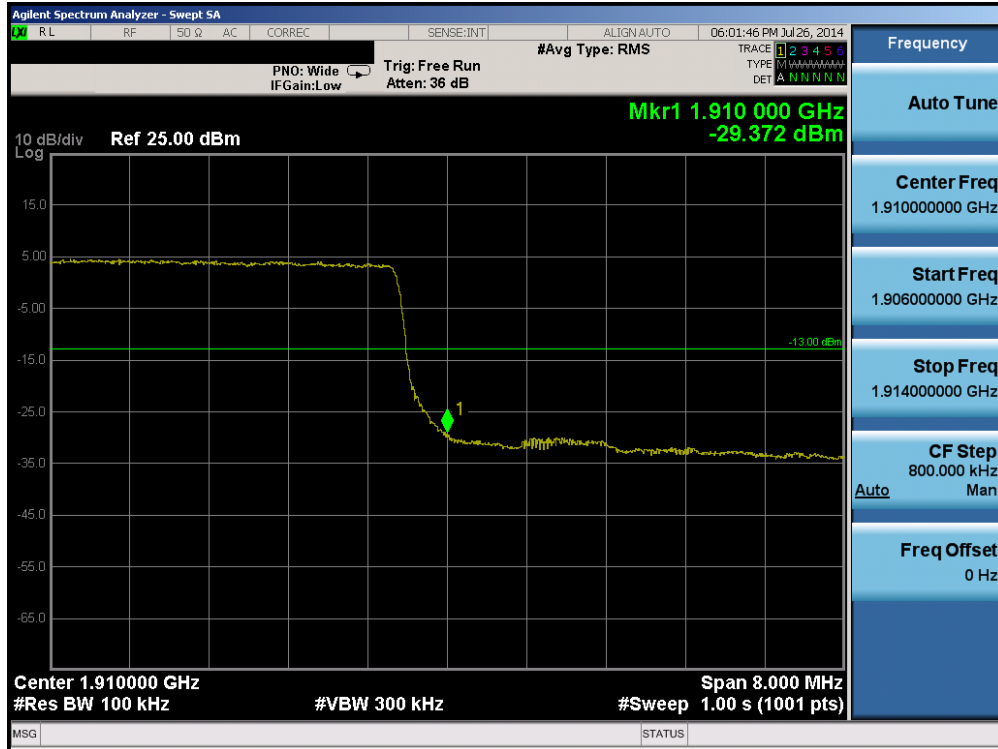


Plot 6-228. Upper Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

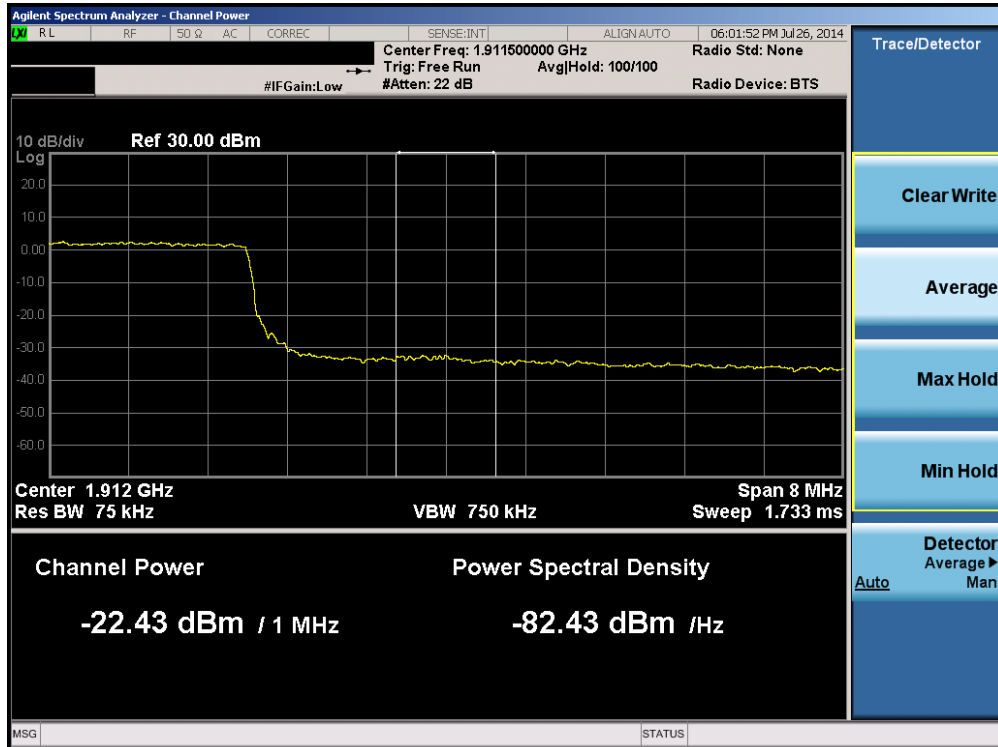


Plot 6-229. Upper Extended Band Edge Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 128 of 164

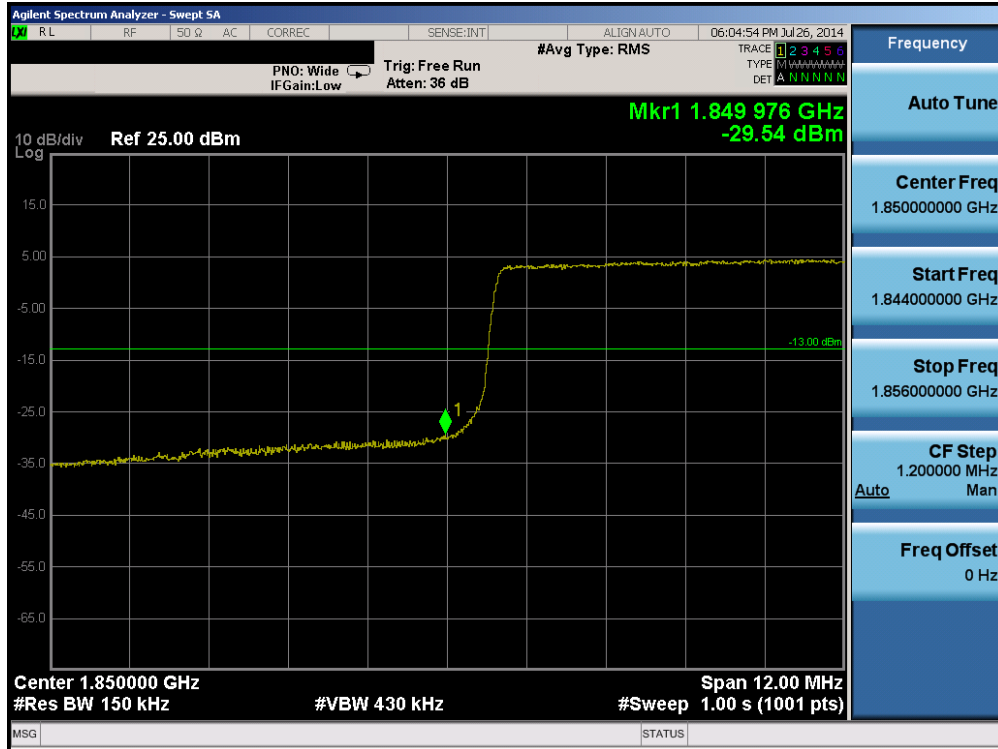

Plot 6-230. Lower Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

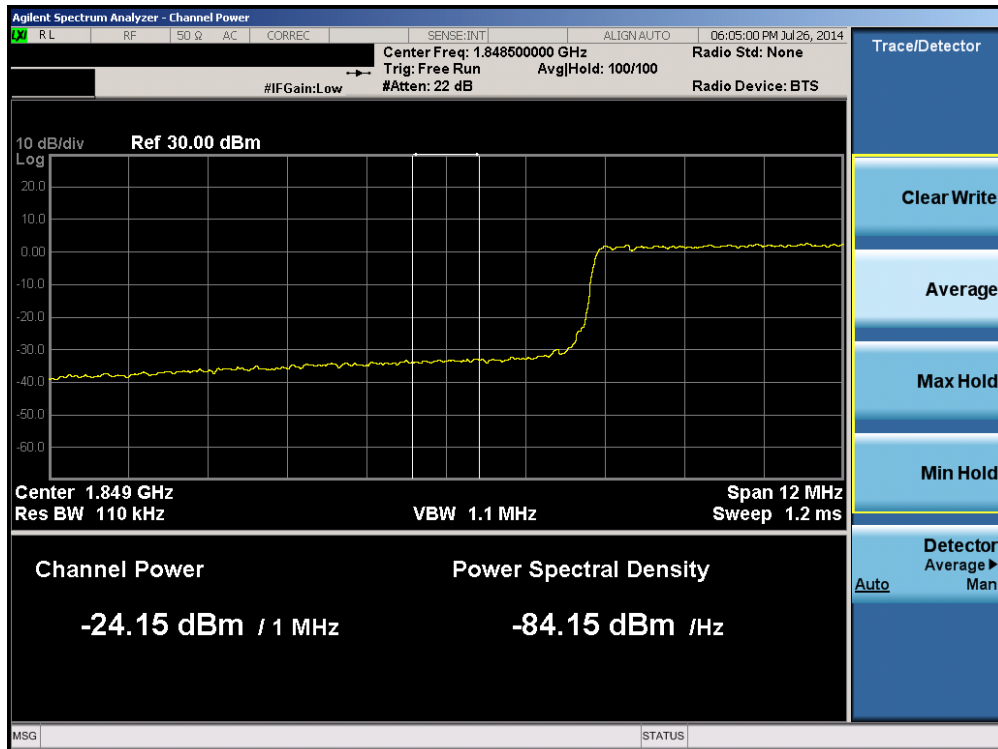


Plot 6-231. Lower Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 129 of 164




Plot 6-232. Upper Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

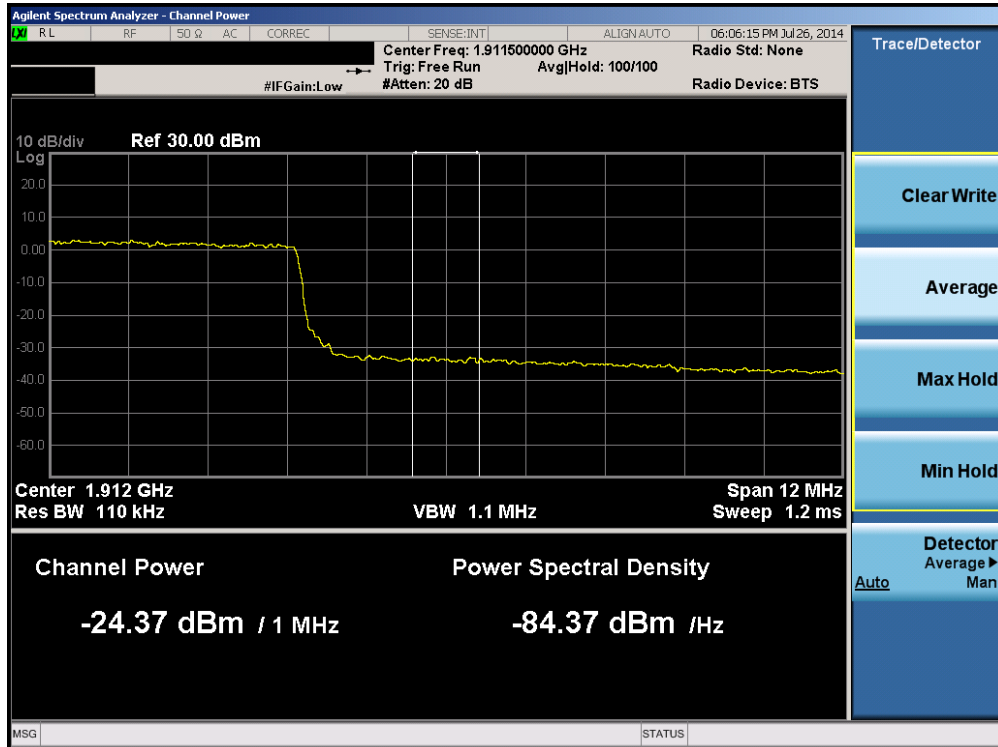


Plot 6-233. Upper Extended Band Edge Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 130 of 164

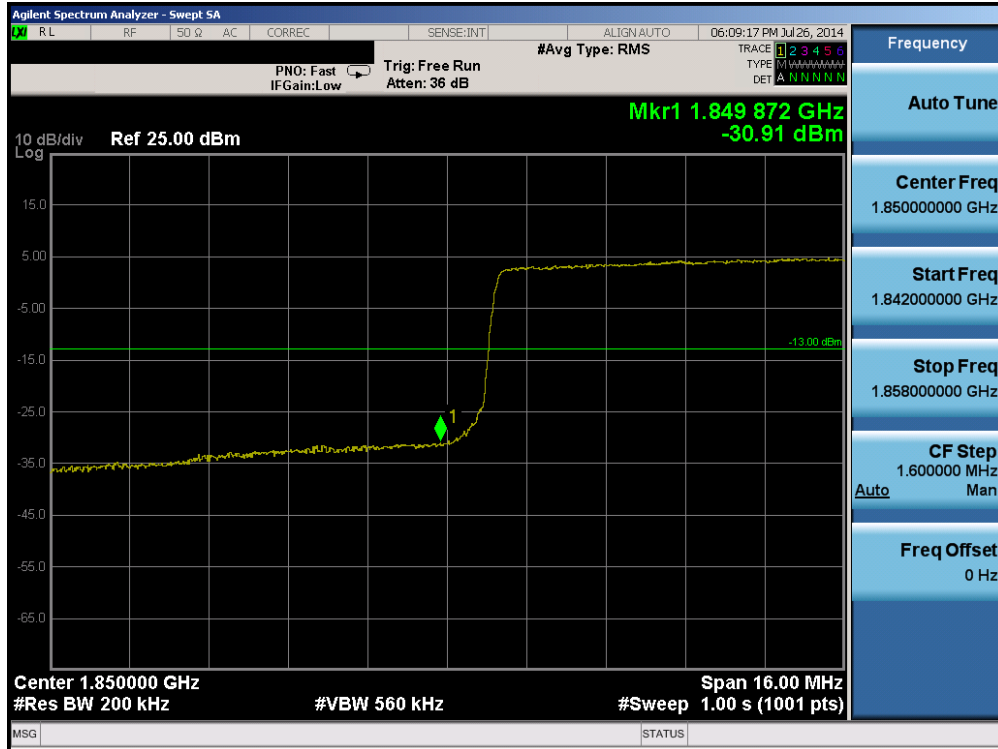


Plot 6-234. Lower Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

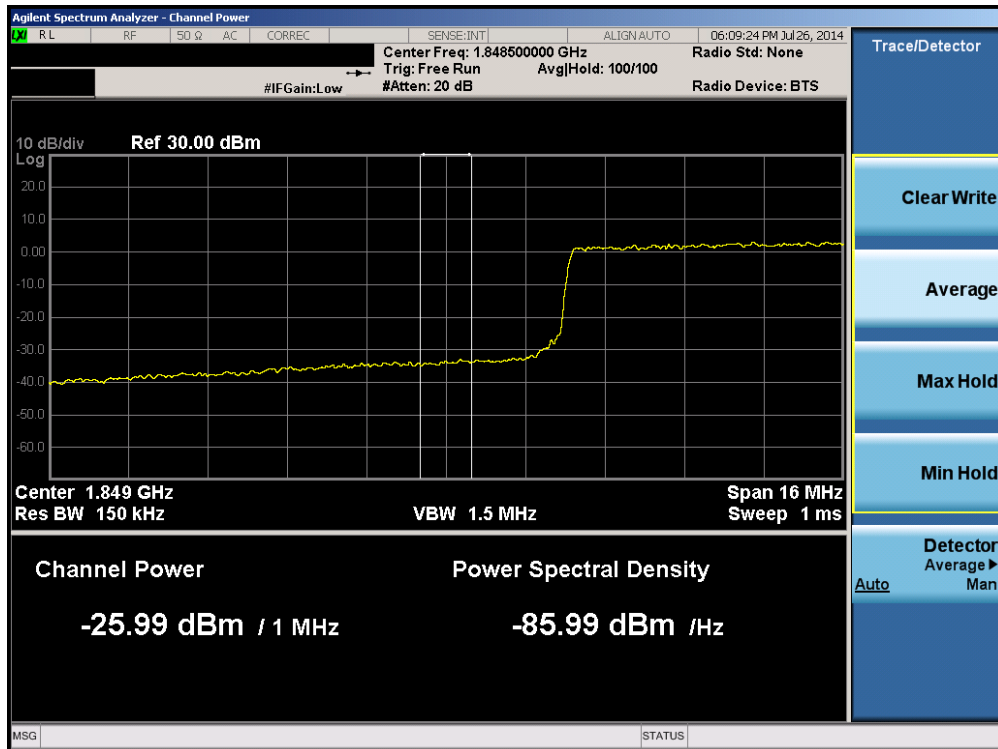


Plot 6-235. Lower Extended Band Edge Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 131 of 164

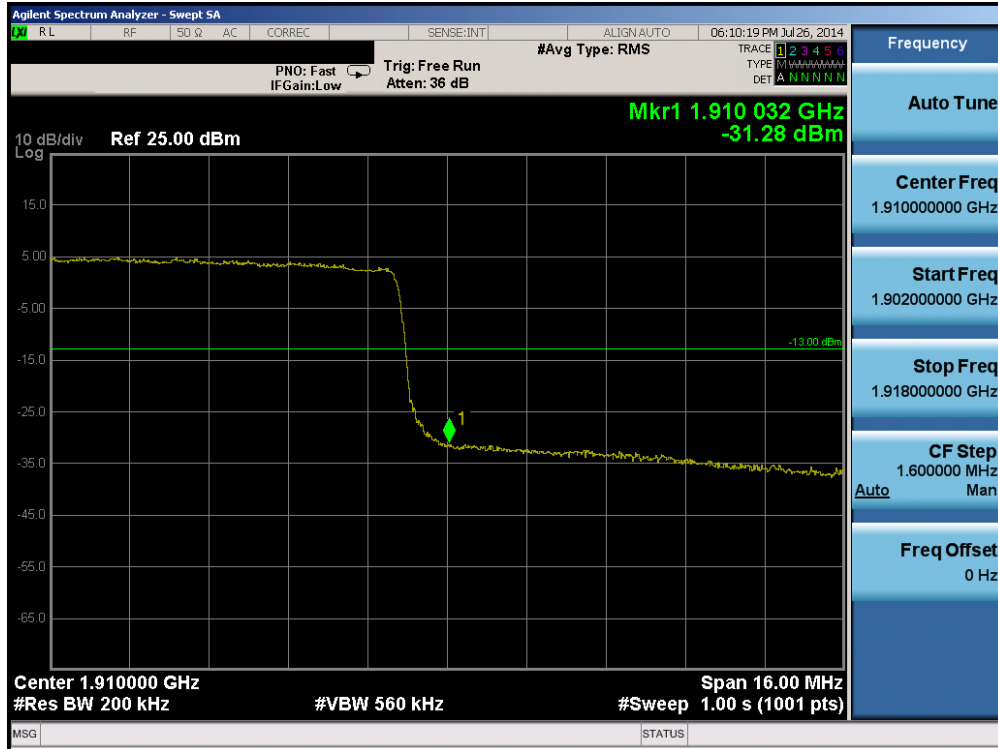

Plot 6-236. Upper Band Edge Plot (Band 2 - 20.0MHz QPSK - RB Size 100)

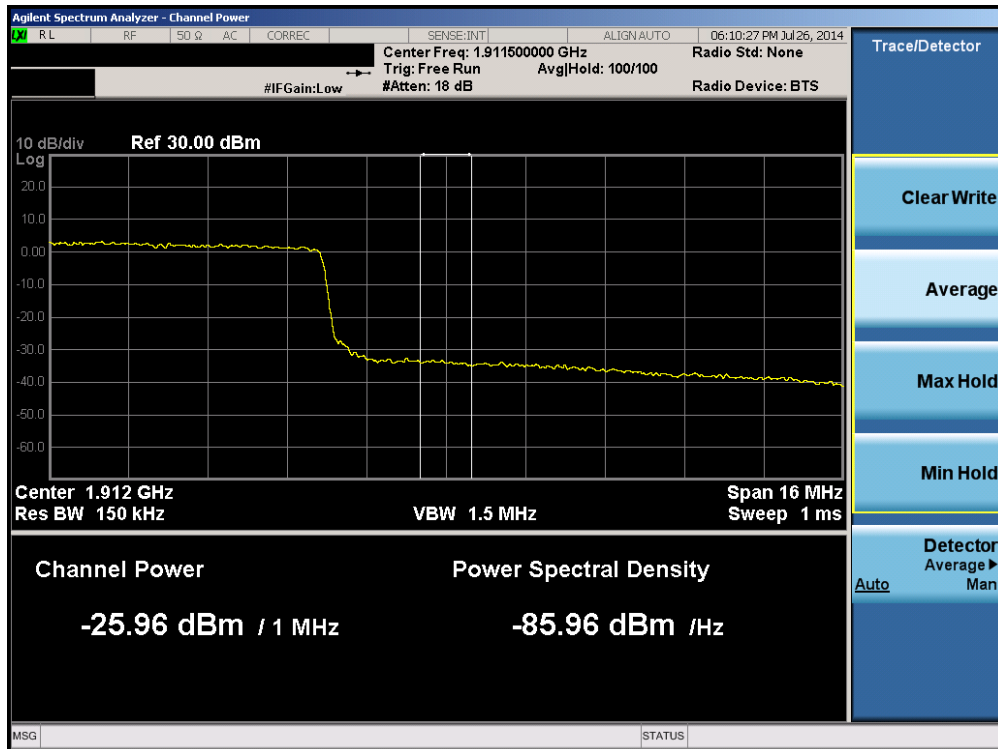

Plot 6-237. Upper Extended Band Edge Plot (Band 2 - 20.0MHz QPSK - RB Size 100)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 132 of 164

## 6.5 Peak-Average Ratio

### §24.232(d)

#### Test Overview

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

#### Test Procedure Used


KDB 971168 v02r01 – Section 5.7.1

#### Test Settings

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.

#### Test Setup

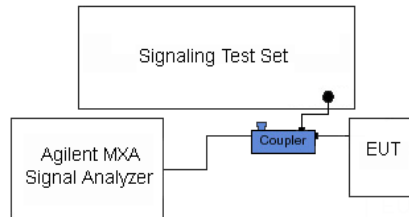

The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-4. Test Instrument & Measurement Setup**


#### Test Notes

None.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 133 of 164	

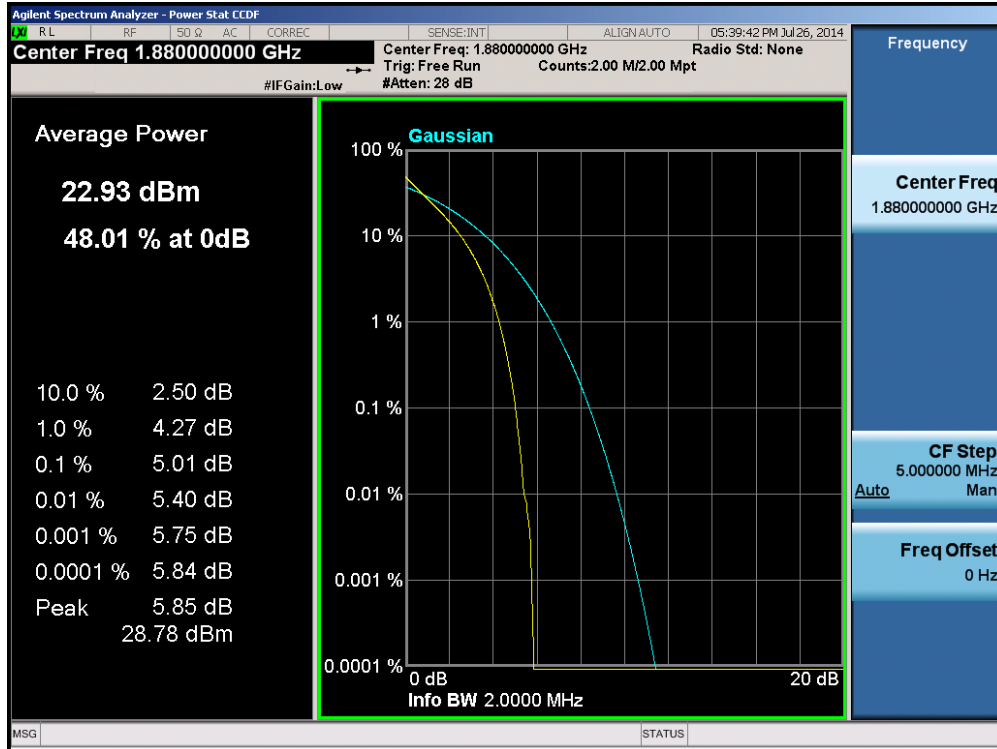


Plot 6-238. PAR Plot (Band 2 – 1.4MHz QPSK – RB Size 6)

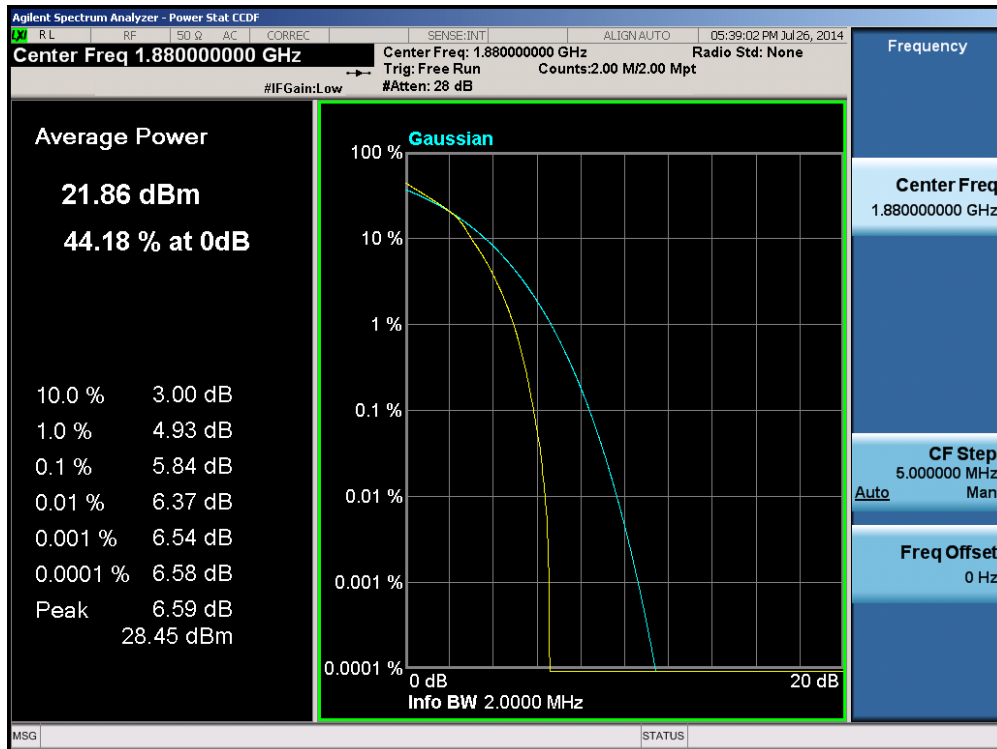


Plot 6-239. PAR Plot (Band 2 – 1.4MHz 16-QAM – RB Size 6)

FCC ID: A3LSMG800R4	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 134 of 164

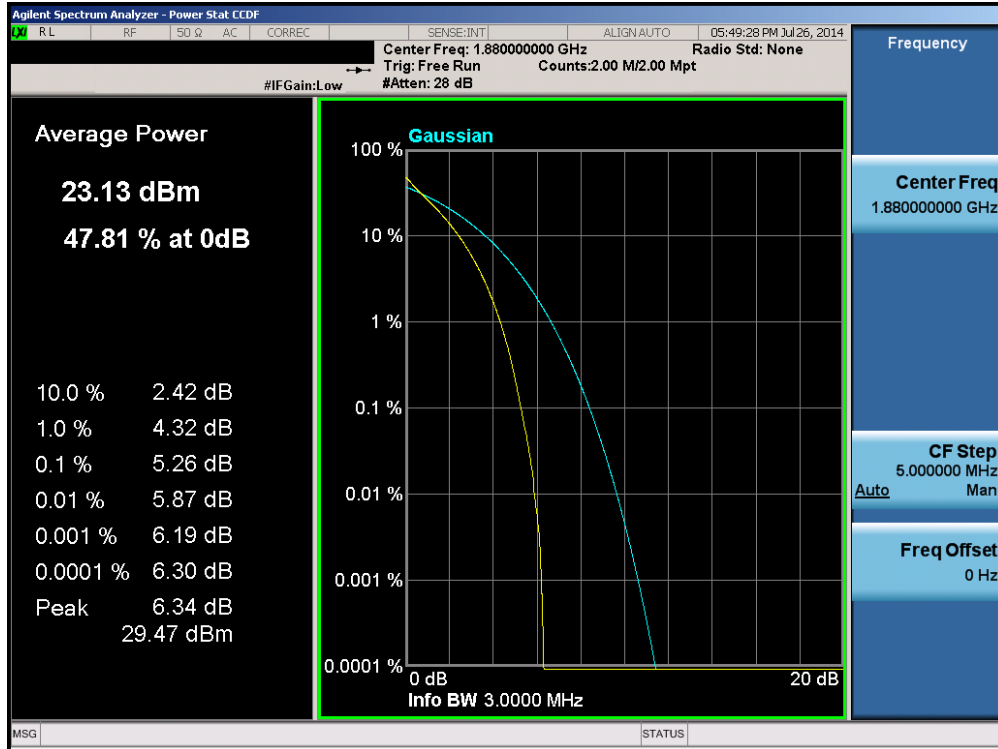


Plot 6-240. PAR Plot (Band 2 – 3.0MHz QPSK – RB Size 15)

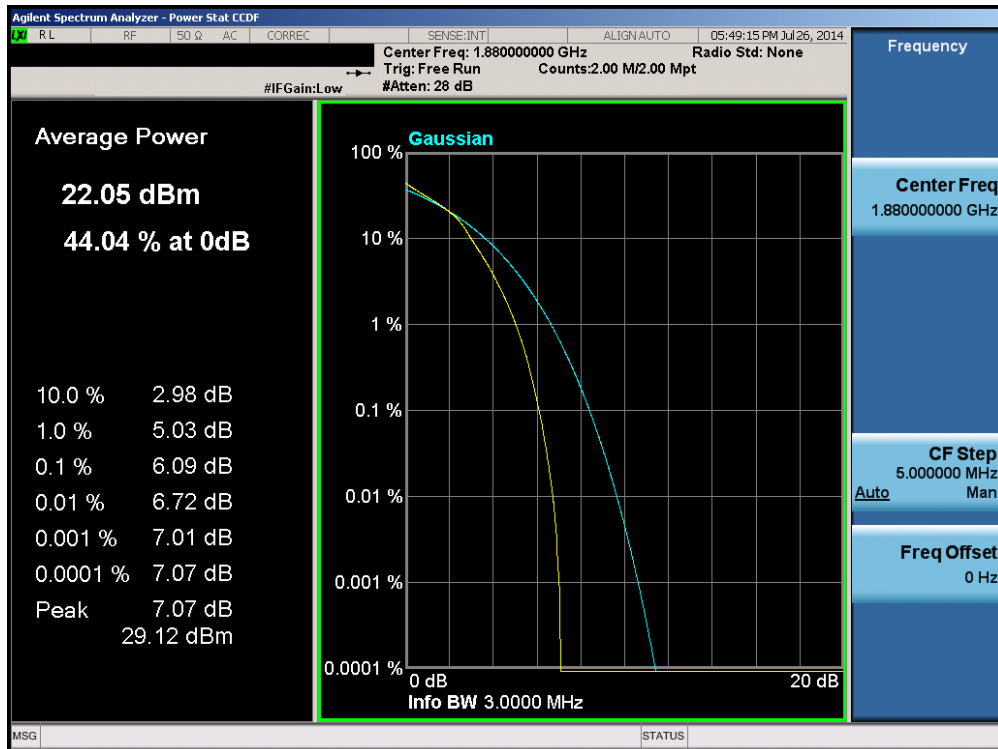


Plot 6-241. PAR Plot (Band 2 – 3.0MHz 16-QAM – RB Size 15)

FCC ID: A3LSMG800R4	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 135 of 164

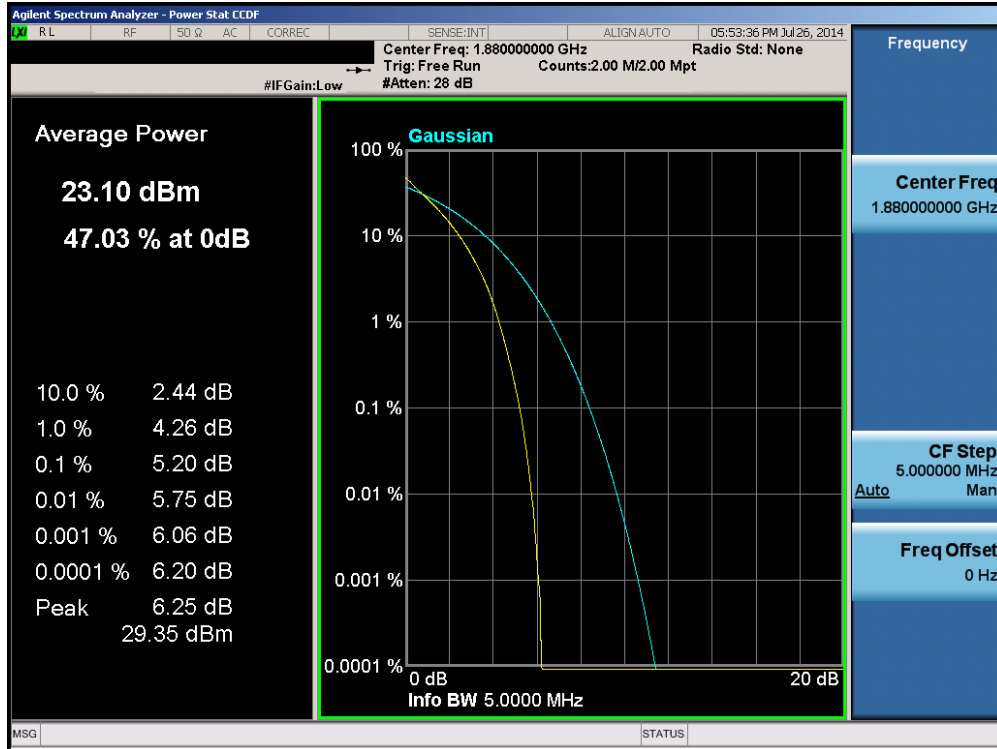


Plot 6-242. PAR Plot (Band 2 – 5.0MHz QPSK – RB Size 25)

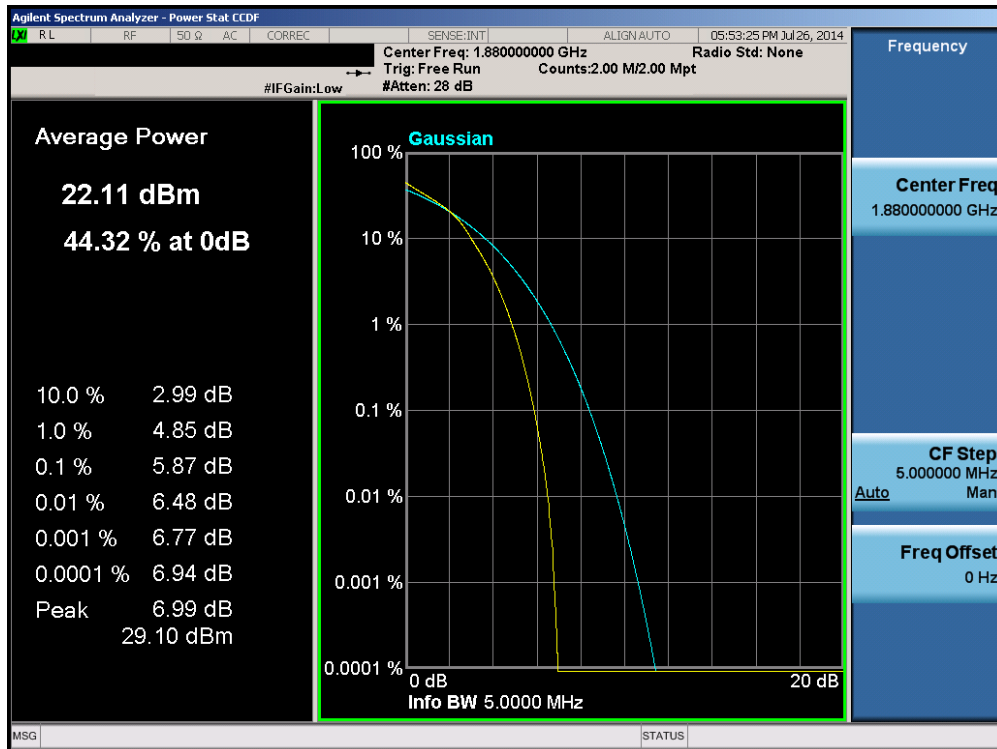


Plot 6-243. PAR Plot (Band 2 – 5.0MHz 16-QAM – RB Size 25)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 136 of 164

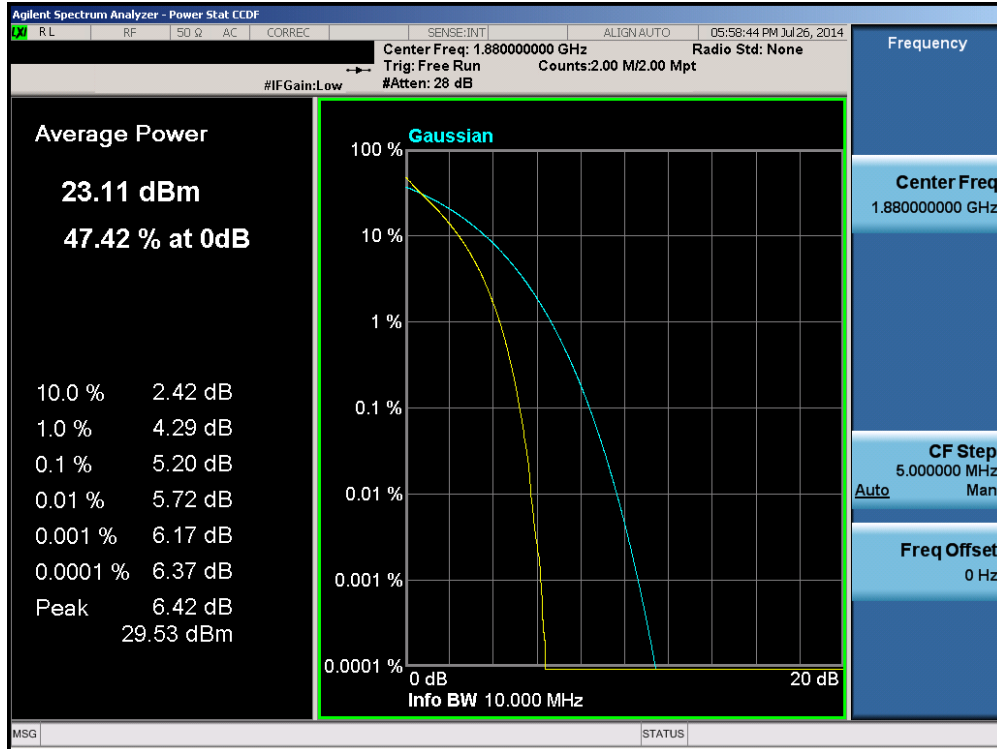


Plot 6-244. PAR Plot (Band 2 – 10.0MHz QPSK – RB Size 50)

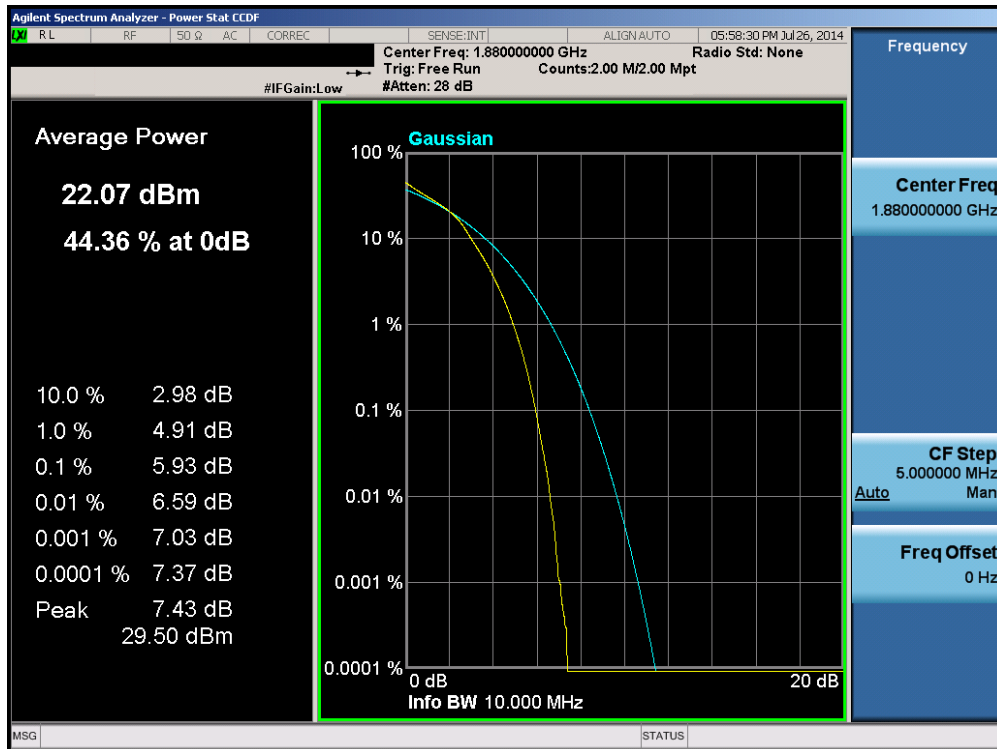


Plot 6-245. PAR Plot (Band 2 – 10.0MHz 16-QAM – RB Size 50)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 137 of 164

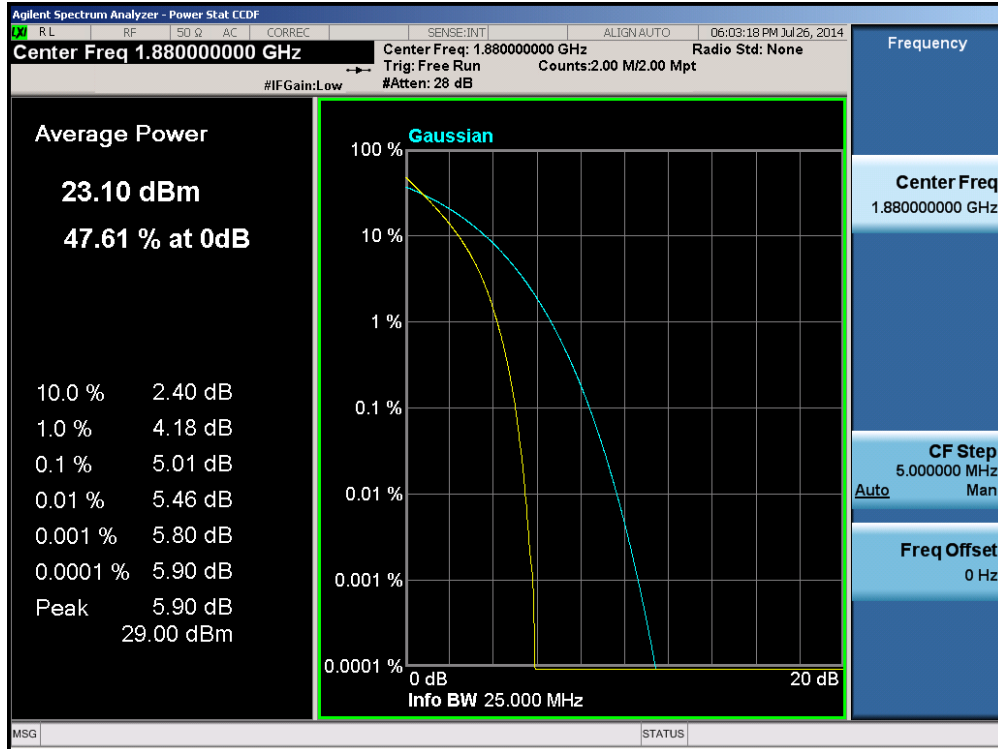


Plot 6-246. PAR Plot (Band 2 – 15.0MHz QPSK – RB Size 75)

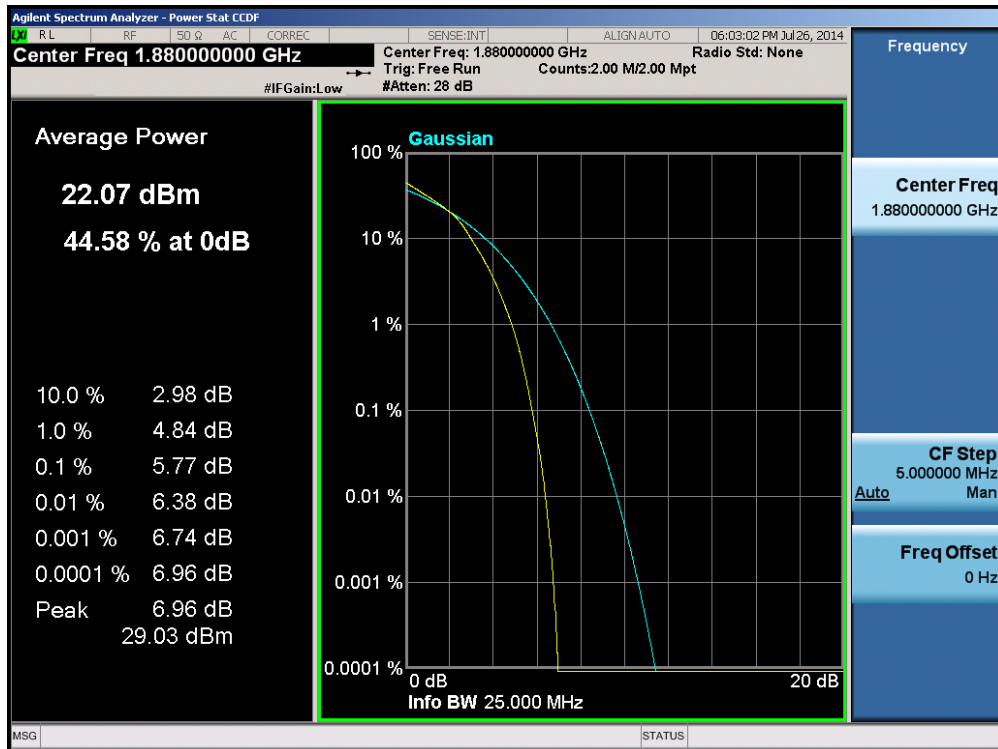


Plot 6-247. PAR Plot (Band 2 – 15.0MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 138 of 164

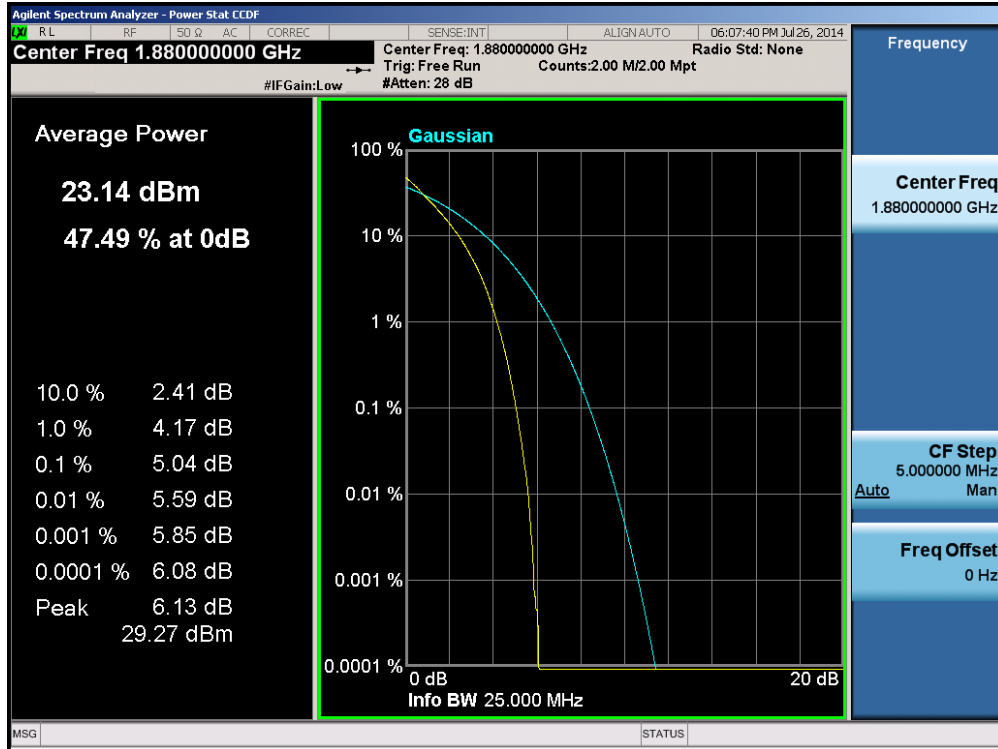

Plot 6-248. PAR Plot (Band 2 – 20.0MHz QPSK – RB Size 100)

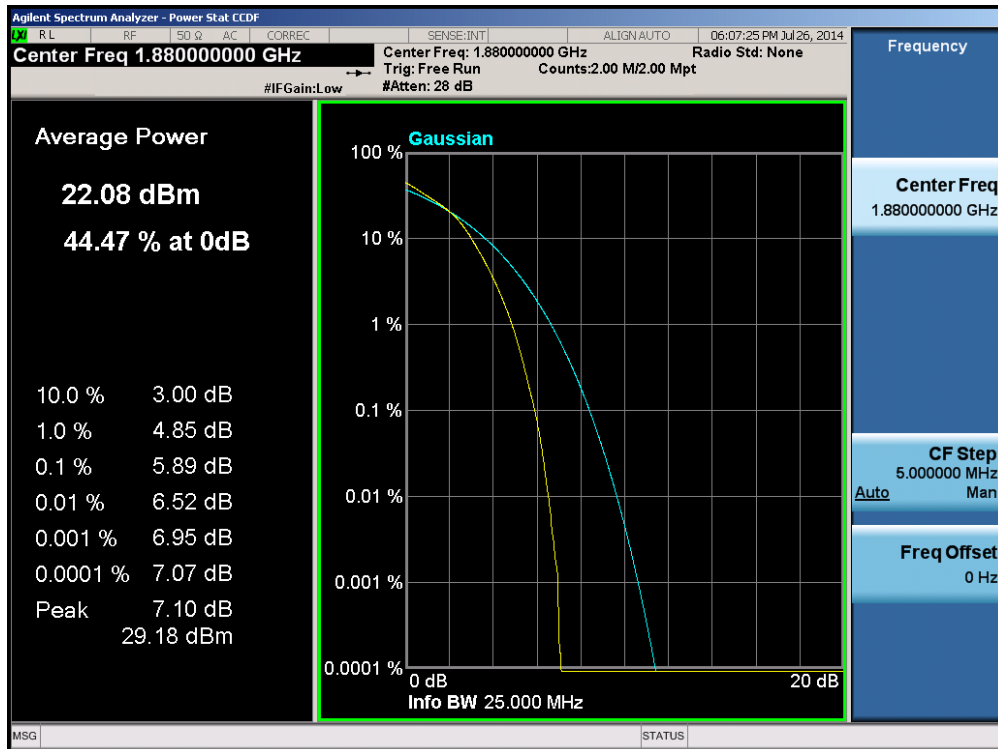

Plot 6-249. PAR Plot (Band 2 – 20.0MHz 16-QAM – RB Size 100)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 139 of 164

**6.6 Radiated Power (ERP/EIRP)**  
§22.913(a.2) §24.232(c) §27.50(c.10) §27.50(d.4)

**Test Overview**

Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.



**Test Procedures Used**

KDB 971168 v02r01 – Section 5.2.1

ANSI/TIA-603-C-2004 – Section 2.2.17


**Test Settings**

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 140 of 164

**Test Setup**

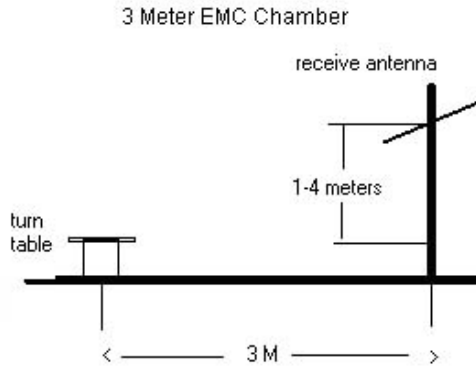

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-5. Test Instrument & Measurement Setup**



**Test Notes**

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The battery used with this device for testing (Model: EB-BG800BBU) contains an embedded NFC antenna.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 141 of 164	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
699.70	1.4	QPSK	Standard	1 / 0	20.51	-1.25	V	V	19.26	0.084	-15.51
707.50	1.4	QPSK	Standard	1 / 0	20.77	-1.28	V	V	19.49	0.089	-15.28
715.30	1.4	QPSK	Standard	1 / 0	20.43	-1.31	V	V	19.12	0.082	-15.65
699.70	1.4	16-QAM	Standard	1 / 0	19.36	-1.25	V	V	18.11	0.065	-16.66
707.50	1.4	16-QAM	Standard	1 / 0	19.55	-1.28	V	V	18.27	0.067	-16.50
715.30	1.4	16-QAM	Standard	1 / 0	19.58	-1.31	V	V	18.27	0.067	-16.50
700.50	3	QPSK	Standard	1 / 0	20.65	-1.25	V	V	19.40	0.087	-15.37
707.50	3	QPSK	Standard	1 / 0	20.63	-1.28	V	V	19.35	0.086	-15.42
714.50	3	QPSK	Standard	1 / 0	20.29	-1.31	V	V	18.98	0.079	-15.79
700.50	3	16-QAM	Standard	1 / 0	19.41	-1.25	V	V	18.16	0.065	-16.61
707.50	3	16-QAM	Standard	1 / 0	19.44	-1.28	V	V	18.16	0.065	-16.61
714.50	3	16-QAM	Standard	1 / 0	19.34	-1.31	V	V	18.03	0.064	-16.74
701.50	5	QPSK	Standard	1 / 0	20.91	-1.26	V	V	19.65	0.092	-15.12
707.50	5	QPSK	Standard	1 / 0	21.09	-1.28	V	V	19.81	0.096	-14.96
713.50	5	QPSK	Standard	1 / 0	20.40	-1.30	V	V	19.10	0.081	-15.68
701.50	5	16-QAM	Standard	1 / 0	19.77	-1.26	V	V	18.51	0.071	-16.26
707.50	5	16-QAM	Standard	1 / 0	20.04	-1.28	V	V	18.76	0.075	-16.01
713.50	5	16-QAM	Standard	1 / 0	19.41	-1.30	V	V	18.11	0.065	-16.67
704.00	10	QPSK	Standard	1 / 0	20.89	-1.27	V	V	19.62	0.092	-15.15
707.50	10	QPSK	Standard	1 / 0	20.35	-1.28	V	V	19.07	0.081	-15.70
711.00	10	QPSK	Standard	1 / 0	20.97	-1.29	V	V	19.68	0.093	-15.10
704.00	10	16-QAM	Standard	1 / 0	19.58	-1.27	V	V	18.31	0.068	-16.46
707.50	10	16-QAM	Standard	1 / 0	19.30	-1.28	V	V	18.02	0.063	-16.75
711.00	10	16-QAM	Standard	1 / 0	20.02	-1.29	V	V	18.73	0.075	-16.05

**Table 6-2. ERP Data (Band 12)**

<b>FCC ID:</b> A3LSMG800R4		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407241471.A3L	<b>Test Dates:</b> July 24 - Aug. 07, 2014	<b>EUT Type:</b> Portable Handset	Page 142 of 164	



Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBd]	Ant. Pol. [H/V]	EUT Pol.	ERP [dBm]	ERP [Watts]	Margin [dB]
824.70	1.4	QPSK	Standard	1 / 5	20.61	-1.85	V	V	18.76	0.075	-19.69
836.50	1.4	QPSK	Standard	1 / 5	23.14	-1.94	V	V	21.20	0.132	-17.25
848.30	1.4	QPSK	Standard	1 / 5	22.86	-2.04	V	V	20.82	0.121	-17.63
824.70	1.4	16-QAM	Standard	1 / 5	19.69	-1.85	V	V	17.84	0.061	-20.61
836.50	1.4	16-QAM	Standard	1 / 5	22.05	-1.94	V	V	20.11	0.103	-18.34
848.30	1.4	16-QAM	Standard	1 / 5	22.01	-2.04	V	V	19.97	0.099	-18.48
825.50	3	QPSK	Standard	1 / 14	20.86	-1.85	V	V	19.01	0.080	-19.45
836.50	3	QPSK	Standard	1 / 14	22.76	-1.94	V	V	20.82	0.121	-17.63
847.50	3	QPSK	Standard	1 / 14	23.54	-2.03	V	V	21.51	0.142	-16.94
825.50	3	16-QAM	Standard	1 / 14	19.95	-1.85	V	V	18.10	0.065	-20.36
836.50	3	16-QAM	Standard	1 / 14	21.88	-1.94	V	V	19.94	0.099	-18.51
847.50	3	16-QAM	Standard	1 / 14	22.61	-2.03	V	V	20.58	0.114	-17.87
826.50	5	QPSK	Standard	1 / 24	21.80	-1.86	V	V	19.94	0.099	-18.51
836.50	5	QPSK	Standard	1 / 24	23.51	-1.94	V	V	21.57	0.143	-16.88
846.50	5	QPSK	Standard	1 / 24	24.25	-2.02	V	V	22.23	0.167	-16.22
826.50	5	16-QAM	Standard	1 / 24	20.53	-1.86	V	V	18.67	0.074	-19.78
836.50	5	16-QAM	Standard	1 / 24	22.71	-1.94	V	V	20.77	0.119	-17.68
846.50	5	16-QAM	Standard	1 / 24	23.28	-2.02	V	V	21.26	0.134	-17.19
829.00	10	QPSK	Standard	1 / 49	22.09	-1.88	V	V	20.21	0.105	-18.24
836.50	10	QPSK	Standard	1 / 49	23.39	-1.94	V	V	21.45	0.140	-17.00
844.00	10	QPSK	Standard	1 / 49	24.02	-2.00	V	V	22.02	0.159	-16.43
829.00	10	16-QAM	Standard	1 / 49	21.15	-1.88	V	V	19.27	0.084	-19.18
836.50	10	16-QAM	Standard	1 / 49	22.36	-1.94	V	V	20.42	0.110	-18.03
844.00	10	16-QAM	Standard	1 / 49	23.10	-2.00	V	V	21.10	0.129	-17.35

**Table 6-3. ERP Data (Band 5)**

<b>FCC ID:</b> A3LSMG800R4		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407241471.A3L	<b>Test Dates:</b> July 24 - Aug. 07, 2014	<b>EUT Type:</b> Portable Handset	Page 143 of 164	


Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1710.70	1.4	QPSK	Standard	1 / 0	13.03	8.21	V	H2	21.24	0.133	-8.76
1732.50	1.4	QPSK	Standard	1 / 0	14.52	8.13	V	H2	22.65	0.184	-7.35
1754.30	1.4	QPSK	Standard	1 / 0	13.49	8.05	V	H2	21.54	0.143	-8.46
1710.70	1.4	16-QAM	Standard	1 / 0	12.15	8.21	V	H2	20.36	0.109	-9.64
1732.50	1.4	16-QAM	Standard	1 / 0	13.58	8.13	V	H2	21.71	0.148	-8.29
1754.30	1.4	16-QAM	Standard	1 / 0	12.45	8.05	V	H2	20.50	0.112	-9.50
1711.50	3	QPSK	Standard	1 / 0	14.40	8.21	V	H2	22.61	0.182	-7.39
1732.50	3	QPSK	Standard	1 / 0	12.43	8.13	V	H2	20.56	0.114	-9.44
1753.50	3	QPSK	Standard	1 / 0	13.93	8.05	V	H2	21.98	0.158	-8.02
1711.50	3	16-QAM	Standard	1 / 0	13.38	8.21	V	H2	21.59	0.144	-8.41
1732.50	3	16-QAM	Standard	1 / 0	11.47	8.13	V	H2	19.60	0.091	-10.40
1753.50	3	16-QAM	Standard	1 / 0	12.85	8.05	V	H2	20.90	0.123	-9.10
1712.50	5	QPSK	Standard	1 / 0	13.63	8.21	V	H2	21.84	0.153	-8.16
1732.50	5	QPSK	Standard	1 / 0	13.93	8.13	V	H2	22.06	0.161	-7.94
1752.50	5	QPSK	Standard	1 / 0	14.03	8.06	V	H2	22.09	0.162	-7.91
1712.50	5	16-QAM	Standard	1 / 0	12.52	8.21	V	H2	20.73	0.118	-9.27
1732.50	5	16-QAM	Standard	1 / 0	12.78	8.13	V	H2	20.91	0.123	-9.09
1752.50	5	16-QAM	Standard	1 / 0	13.10	8.06	V	H2	21.16	0.131	-8.84
1715.00	10	QPSK	Standard	1 / 0	14.05	8.20	V	H2	22.25	0.168	-7.75
1732.50	10	QPSK	Standard	1 / 0	13.68	8.13	V	H2	21.81	0.152	-8.19
1750.00	10	QPSK	Standard	1 / 0	14.82	8.07	V	H2	22.89	0.194	-7.11
1715.00	10	16-QAM	Standard	1 / 0	12.92	8.20	V	H2	21.12	0.129	-8.88
1732.50	10	16-QAM	Standard	1 / 0	12.77	8.13	V	H2	20.90	0.123	-9.10
1750.00	10	16-QAM	Standard	1 / 0	13.80	8.07	V	H2	21.87	0.154	-8.13
1717.50	15	QPSK	Standard	1 / 0	14.43	8.19	V	H2	22.62	0.183	-7.38
1732.50	15	QPSK	Standard	1 / 0	12.38	8.13	V	H2	20.51	0.113	-9.49
1747.50	15	QPSK	Standard	1 / 0	14.68	8.08	V	H2	22.76	0.189	-7.24
1717.50	15	16-QAM	Standard	1 / 0	13.46	8.19	V	H2	21.65	0.146	-8.35
1732.50	15	16-QAM	Standard	1 / 0	11.30	8.13	V	H2	19.43	0.088	-10.57
1747.50	15	16-QAM	Standard	1 / 0	13.82	8.08	V	H2	21.90	0.155	-8.10
1720.00	20	QPSK	Standard	1 / 0	14.62	8.18	V	H2	22.80	0.190	-7.20
1732.50	20	QPSK	Standard	1 / 0	15.07	8.13	V	H2	23.20	0.209	-6.80
1745.00	20	QPSK	Standard	1 / 0	11.50	8.09	V	H2	19.59	0.091	-10.41
1720.00	20	16-QAM	Standard	1 / 0	12.66	8.18	V	H2	20.84	0.121	-9.16
1732.50	20	16-QAM	Standard	1 / 0	14.02	8.13	V	H2	22.15	0.164	-7.85
1745.00	20	16-QAM	Standard	1 / 0	10.59	8.09	V	H2	18.68	0.074	-11.32

**Table 6-4. EIRP Data (Band 4)**

<b>FCC ID:</b> A3LSMG800R4		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407241471.A3L	<b>Test Dates:</b> July 24 - Aug. 07, 2014	<b>EUT Type:</b> Portable Handset	Page 144 of 164	

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Battery	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	Ant. Pol. [H/V]	EUT Pol.	EIRP [dBm]	EIRP [Watts]	Margin [dB]
1850.70	1.4	QPSK	Standard	3 / 2	14.72	7.97	V	V	22.69	0.186	-10.32
1880.00	1.4	QPSK	Standard	3 / 2	13.55	8.02	V	V	21.57	0.144	-11.44
1909.30	1.4	QPSK	Standard	3 / 2	12.72	8.11	V	V	20.83	0.121	-12.18
1850.70	1.4	16-QAM	Standard	3 / 2	13.61	7.97	V	V	21.58	0.144	-11.43
1880.00	1.4	16-QAM	Standard	3 / 2	12.84	8.02	V	V	20.86	0.122	-12.15
1909.30	1.4	16-QAM	Standard	3 / 2	11.66	8.11	V	V	19.77	0.095	-13.24
1851.50	3	QPSK	Standard	1 / 14	15.22	7.97	V	V	23.19	0.209	-9.82
1880.00	3	QPSK	Standard	1 / 14	15.41	8.02	V	V	23.43	0.220	-9.58
1908.50	3	QPSK	Standard	1 / 14	13.53	8.10	V	V	21.63	0.146	-11.38
1851.50	3	16-QAM	Standard	1 / 14	14.25	7.97	V	V	22.22	0.167	-10.79
1880.00	3	16-QAM	Standard	1 / 14	14.30	8.02	V	V	22.32	0.171	-10.69
1908.50	3	16-QAM	Standard	1 / 14	12.50	8.10	V	V	20.60	0.115	-12.41
1852.50	5	QPSK	Standard	1 / 24	13.58	7.98	V	V	21.56	0.143	-11.45
1880.00	5	QPSK	Standard	1 / 24	13.99	8.02	V	V	22.01	0.159	-11.00
1907.50	5	QPSK	Standard	1 / 24	13.12	8.10	V	V	21.22	0.132	-11.79
1852.50	5	16-QAM	Standard	1 / 24	12.38	7.98	V	V	20.36	0.109	-12.65
1880.00	5	16-QAM	Standard	1 / 24	12.85	8.02	V	V	20.87	0.122	-12.14
1907.50	5	16-QAM	Standard	1 / 24	11.93	8.10	V	V	20.03	0.101	-12.98
1855.00	10	QPSK	Standard	1 / 49	15.23	7.98	V	V	23.21	0.209	-9.80
1880.00	10	QPSK	Standard	1 / 49	14.13	8.02	V	V	22.15	0.164	-10.86
1905.00	10	QPSK	Standard	1 / 49	15.14	8.08	V	V	23.22	0.210	-9.79
1855.00	10	16-QAM	Standard	1 / 49	14.27	7.98	V	V	22.25	0.168	-10.76
1880.00	10	16-QAM	Standard	1 / 49	13.39	8.02	V	V	21.41	0.138	-11.60
1905.00	10	16-QAM	Standard	1 / 49	14.06	8.08	V	V	22.14	0.164	-10.87
1857.50	15	QPSK	Standard	1 / 74	14.13	7.98	V	V	22.11	0.163	-10.90
1880.00	15	QPSK	Standard	1 / 74	14.77	8.02	V	V	22.79	0.190	-10.22
1902.50	15	QPSK	Standard	1 / 74	14.96	8.07	V	V	23.03	0.201	-9.98
1857.50	15	16-QAM	Standard	1 / 74	13.45	7.98	V	V	21.43	0.139	-11.58
1880.00	15	16-QAM	Standard	1 / 74	13.89	8.02	V	V	21.91	0.155	-11.10
1902.50	15	16-QAM	Standard	1 / 74	14.15	8.07	V	V	22.22	0.167	-10.79
1860.00	20	QPSK	Standard	1 / 99	13.49	7.99	V	V	21.48	0.141	-11.53
1880.00	20	QPSK	Standard	1 / 99	13.23	8.02	V	V	21.25	0.133	-11.76
1900.00	20	QPSK	Standard	1 / 99	11.14	8.06	V	V	19.20	0.083	-13.81
1860.00	20	16-QAM	Standard	1 / 99	12.36	7.99	V	V	20.35	0.108	-12.66
1880.00	20	16-QAM	Standard	1 / 99	12.24	8.02	V	V	20.26	0.106	-12.75
1900.00	20	16-QAM	Standard	1 / 99	9.99	8.06	V	V	18.05	0.064	-14.96

**Table 6-5. EIRP Data (Band 2)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 145 of 164	

## 6.7 Radiated Spurious Emissions Measurements

§2.1053 §22.917(a) §24.238(a) §27.53(m) §27.53(m) §27.53(h)

### Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-C-2004 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### Test Procedures Used

KDB 971168 v02r01 – Section 5.8


ANSI/TIA-603-C-2004 – Section 2.2.12

### Test Settings



1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq$  3 x RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $\geq$  2 x span / RBW
5. Detector = Peak
6. Trace mode = max hold
7. The trace was allowed to stabilize

### Test Setup

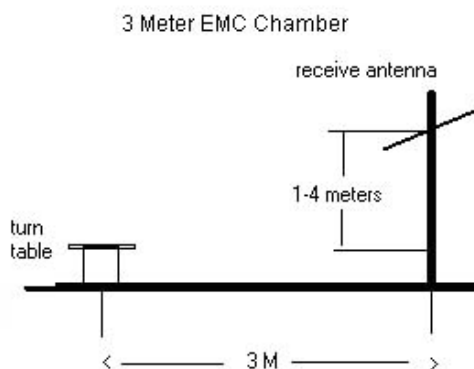The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-6. Test Instrument & Measurement Setup**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 146 of 164	



### Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The “H” positioning is defined with the EUT lying flat on the test surface, the “H2” positioning is defined with the EUT standing up on its side, and the “V” positioning is defined with the EUT standing upright. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) The battery used with this device for testing (Model: EB-BG800BBU) contains an embedded NFC antenna.
- 3) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 4) Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.

OPERATING FREQUENCY: 701.50 MHz  
 CHANNEL: 23035  
 MEASURED OUTPUT POWER: 19.65 dBm = 0.092 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.65 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1403.00	-54.13	6.07	-48.06	V	V	67.7
2104.50	-71.16	6.91	-64.25	V	V	83.9

Table 6-6. Radiated Spurious Data (Band 12 – Low Channel)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 147 of 164	

OPERATING FREQUENCY: 707.50 MHz  
 CHANNEL: 23095  
 MEASURED OUTPUT POWER: 19.81 dBm = 0.096 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.81 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1415.00	-53.38	6.10	-47.28	V	V	67.1
2122.50	-54.89	6.90	-47.99	V	V	67.8
2830.00	-70.48	8.09	-62.39	V	V	82.2

Table 6-7. Radiated Spurious Data (Band 12 – Mid Channel)

OPERATING FREQUENCY: 713.50 MHz  
 CHANNEL: 23155  
 MEASURED OUTPUT POWER: 19.10 dBm = 0.081 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10} (W) =$  32.10 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1427.00	-55.94	6.13	-49.81	V	V	68.9
2140.50	-58.32	6.89	-51.43	V	V	70.5
2854.00	-70.35	8.10	-62.26	V	V	81.4

Table 6-8. Radiated Spurious Data (Band 12 – High Channel)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 148 of 164	

OPERATING FREQUENCY: 826.50 MHz  
 CHANNEL: 20425  
 MEASURED OUTPUT POWER: 19.94 dBm = 0.099 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.94 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1653.00	-58.43	6.32	-52.11	V	V	72.1
2479.50	-67.91	6.58	-61.33	V	V	81.3

**Table 6-9. Radiated Spurious Data (Band 5 – Low Channel)**

OPERATING FREQUENCY: 836.50 MHz  
 CHANNEL: 20525  
 MEASURED OUTPUT POWER: 21.57 dBm = 0.143 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.57 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1673.00	-53.03	6.19	-46.84	V	V	68.4
2509.50	-68.41	6.58	-61.83	V	V	83.4

**Table 6-10. Radiated Spurious Data (Band 5 – Mid Channel)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 149 of 164	

OPERATING FREQUENCY: 846.50 MHz  
 CHANNEL: 20625  
 MEASURED OUTPUT POWER: 22.23 dBm = 0.167 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 5.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.23 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBd]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
1693.00	-54.36	6.06	-48.30	V	V	70.5
2539.50	-68.68	6.69	-61.99	V	V	84.2

**Table 6-11. Radiated Spurious Data (Band 5 – High Channel)**

OPERATING FREQUENCY: 1720.00 MHz  
 CHANNEL: 20050  
 MEASURED OUTPUT POWER: 22.80 dBm = 0.190 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  35.80 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3440.00	-42.76	9.59	-33.17	V	H2	56.0
5160.00	-68.12	10.95	-57.17	V	H2	80.0

**Table 6-12. Radiated Spurious Data (Band 4 – Low Channel)**

OPERATING FREQUENCY: 1732.50 MHz  
 CHANNEL: 20175  
 MEASURED OUTPUT POWER: 23.20 dBm = 0.209 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.20 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3465.00	-38.85	9.63	-29.21	V	H2	52.4
5197.50	-66.76	10.93	-55.82	V	H2	79.0

**Table 6-13. Radiated Spurious Data (Band 4 – Mid Channel)**

OPERATING FREQUENCY: 1745.00 MHz  
 CHANNEL: 1745  
 MEASURED OUTPUT POWER: 19.59 dBm = 0.091 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 20.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  32.59 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3490.00	-41.91	9.67	-32.24	V	H2	51.8
5235.00	-67.92	10.97	-56.95	V	H2	76.5

**Table 6-14. Radiated Spurious Data (Band 4 – High Channel)**

OPERATING FREQUENCY: 1851.50 MHz  
 CHANNEL: 18615  
 MEASURED OUTPUT POWER: 23.19 dBm = 0.209 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.19 dBc



Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3703.00	-55.03	9.92	-45.11	V	V	68.3
5554.50	-56.40	11.11	-45.28	V	V	68.5
7406.00	-61.83	10.75	-51.09	V	V	74.3

**Table 6-15. Radiated Spurious Data (Band 2 – Low Channel)**

OPERATING FREQUENCY: 1880.00 MHz  
 CHANNEL: 18900  
 MEASURED OUTPUT POWER: 23.43 dBm = 0.220 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  36.43 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3760.00	-55.35	9.70	-45.65	V	V	69.1
5640.00	-54.38	11.25	-43.13	V	V	66.6
7520.00	-61.25	10.99	-50.26	V	V	73.7



**Table 6-16. Radiated Spurious Data (Band 2 – Mid Channel)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 152 of 164	

OPERATING FREQUENCY: 1908.50 MHz  
 CHANNEL: 19185  
 MEASURED OUTPUT POWER: 21.63 dBm = 0.146 W  
 MODULATION SIGNAL: QPSK  
 BANDWIDTH: 3.0 MHz  
 DISTANCE: 3 meters  
 LIMIT:  $43 + 10 \log_{10}(W) =$  34.63 dBc

Frequency [MHz]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Ant. Pol. [H/V]	EUT Pol. [H/H2/V]	[dBc]
3817.00	-53.49	9.49	-44.01	V	V	65.6
5725.50	-54.80	11.30	-43.51	V	V	65.1
7634.00	-61.82	11.22	-50.60	V	V	72.2

Table 6-17. Radiated Spurious Data (Band 2 – High Channel)

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 153 of 164	

## 6.8 Frequency Stability / Temperature Variation

§2.1055 §22.355 §24.235 §27.54

### Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-C-2004. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

*For Part 22, the frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm) of the center frequency. For Part 24 and Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.*

### Test Procedure Used

ANSI/TIA-603-C-2004

### Test Settings



1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

### Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

### Test Notes

None

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 154 of 164

## Band 12 Frequency Stability Measurements

§2.1055 §27.54



OPERATING FREQUENCY: 707,500,000 Hz  
 CHANNEL: 23790  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	707,499,985	-15	-0.0000021
100 %		- 30	707,500,010	10	0.0000014
100 %		- 20	707,500,016	16	0.0000023
100 %		- 10	707,499,986	-14	-0.0000020
100 %		0	707,499,989	-11	-0.0000016
100 %		+ 10	707,499,983	-17	-0.0000024
100 %		+ 20	707,499,985	-15	-0.0000021
100 %		+ 30	707,499,982	-18	-0.0000025
100 %		+ 40	707,499,988	-12	-0.0000017
100 %		+ 50	707,500,010	10	0.0000014
BATT. ENDPOINT		3.40	+ 20	707,499,976	-24


Table 6-18. Frequency Stability Data (Band 12)

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 155 of 164	

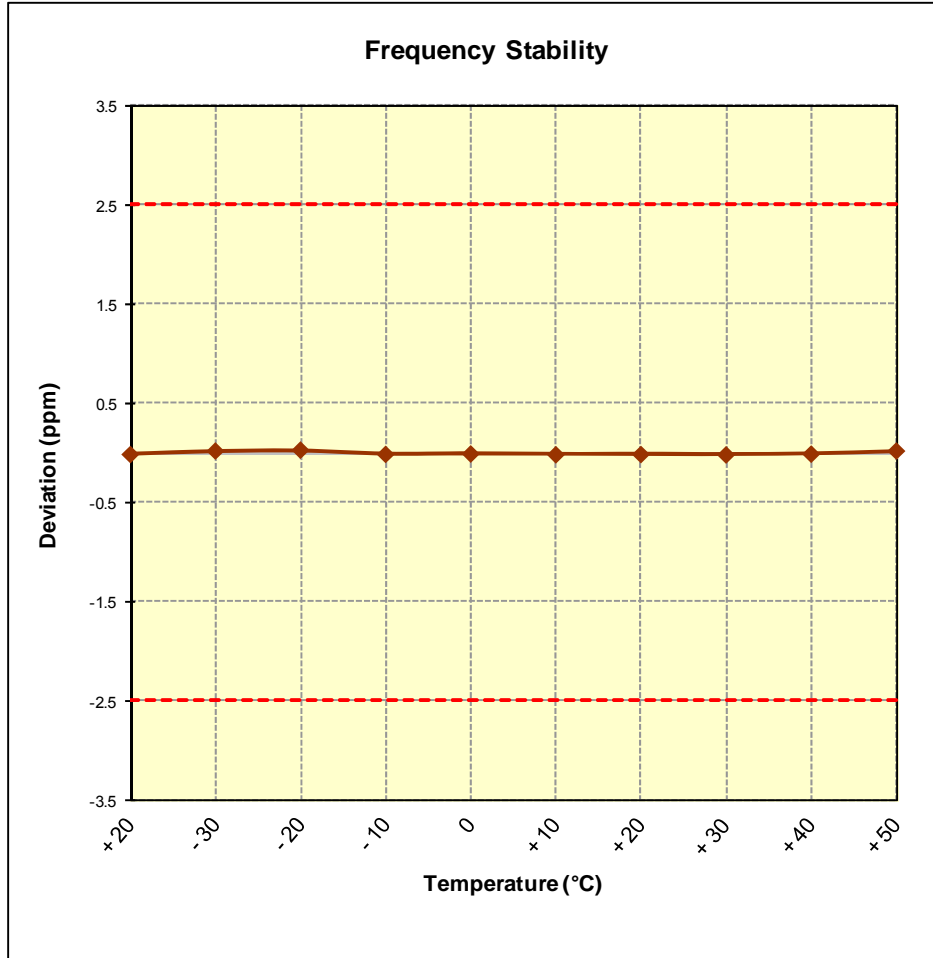
**Band 12 Frequency Stability Measurements**  
§2.1055 §27.54





**Figure 6-7. Frequency Stability Graph (Band 12)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 156 of 164	

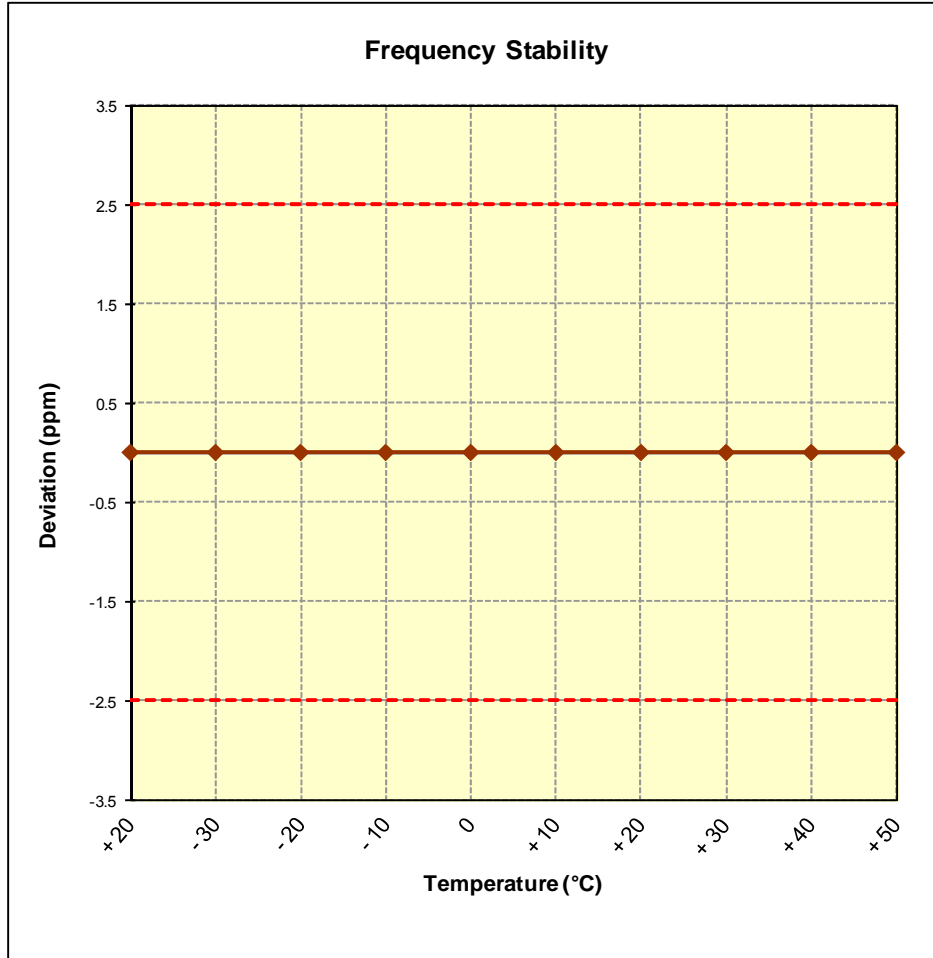**Band 17 Frequency Stability Measurements**  
§2.1055 §27.54



**Figure 6-8. Frequency Stability Graph (Band 17)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 157 of 164	



## Band 5 Frequency Stability Measurements

§2.1055 §22.355


OPERATING FREQUENCY: 836,500,000 Hz  
 CHANNEL: 20525  
 REFERENCE VOLTAGE: 3.85 VDC  
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	836,499,989	-11	-0.0000013
100 %		- 30	836,499,984	-16	-0.0000019
100 %		- 20	836,499,988	-12	-0.0000014
100 %		- 10	836,499,983	-17	-0.0000020
100 %		0	836,499,981	-19	-0.0000023
100 %		+ 10	836,499,981	-19	-0.0000023
100 %		+ 20	836,499,989	-11	-0.0000013
100 %		+ 30	836,499,982	-18	-0.0000022
100 %		+ 40	836,500,012	12	0.0000014
100 %		+ 50	836,499,986	-14	-0.0000017
BATT. ENDPOINT		3.40	+ 20	836,499,974	-26



**Table 6-19. Frequency Stability Data (Band 5)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 158 of 164	

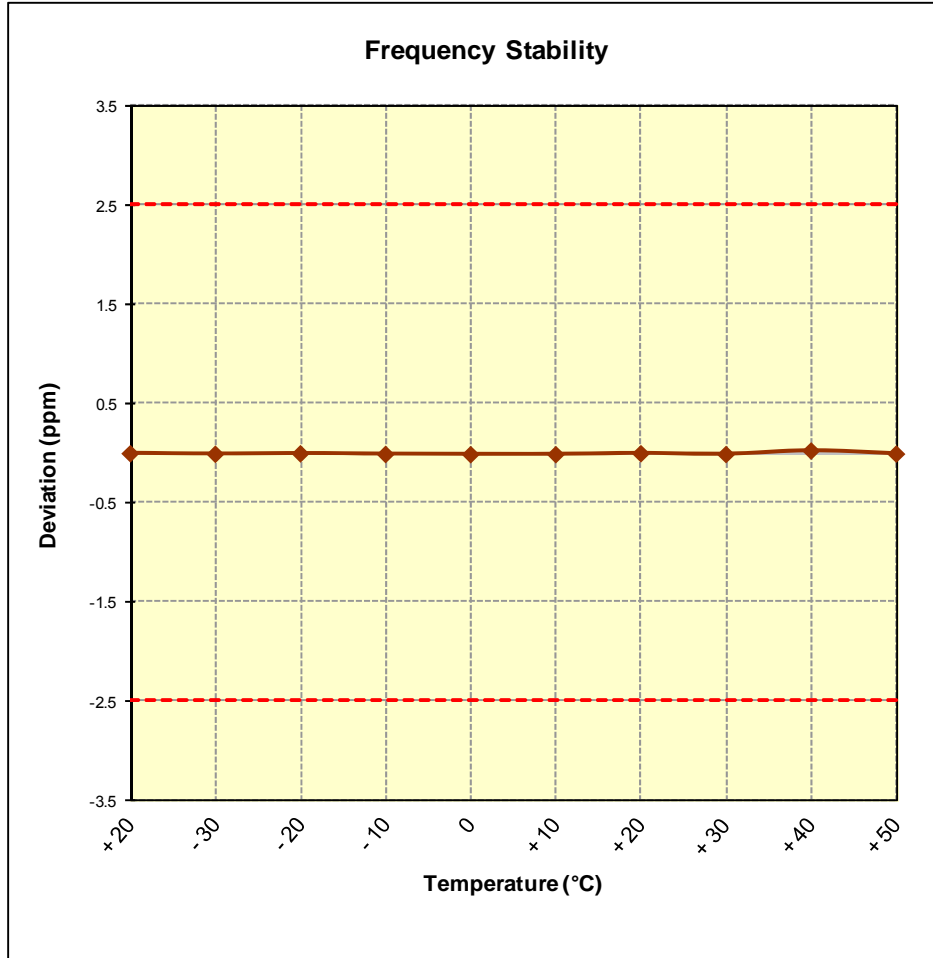**Band 5 Frequency Stability Measurements**  
§2.1055 §22.355



**Figure 6-9. Frequency Stability Graph (Band 5)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 159 of 164	

## Band 4 Frequency Stability Measurements

§2.1055 §§27.54



OPERATING FREQUENCY: 1,732,500,000 Hz  
 CHANNEL: 20175  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,732,499,981	-19	-0.0000011
100 %		- 30	1,732,500,011	11	0.0000006
100 %		- 20	1,732,500,017	17	0.0000010
100 %		- 10	1,732,499,985	-15	-0.0000009
100 %		0	1,732,499,988	-12	-0.0000007
100 %		+ 10	1,732,499,986	-14	-0.0000008
100 %		+ 20	1,732,499,981	-19	-0.0000011
100 %		+ 30	1,732,499,989	-11	-0.0000006
100 %		+ 40	1,732,500,017	17	0.0000010
100 %		+ 50	1,732,499,984	-16	-0.0000009
BATT. ENDPOINT		3.40	+ 20	1,732,499,977	-23


Table 6-20. Frequency Stability Data (Band 4)

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 160 of 164	

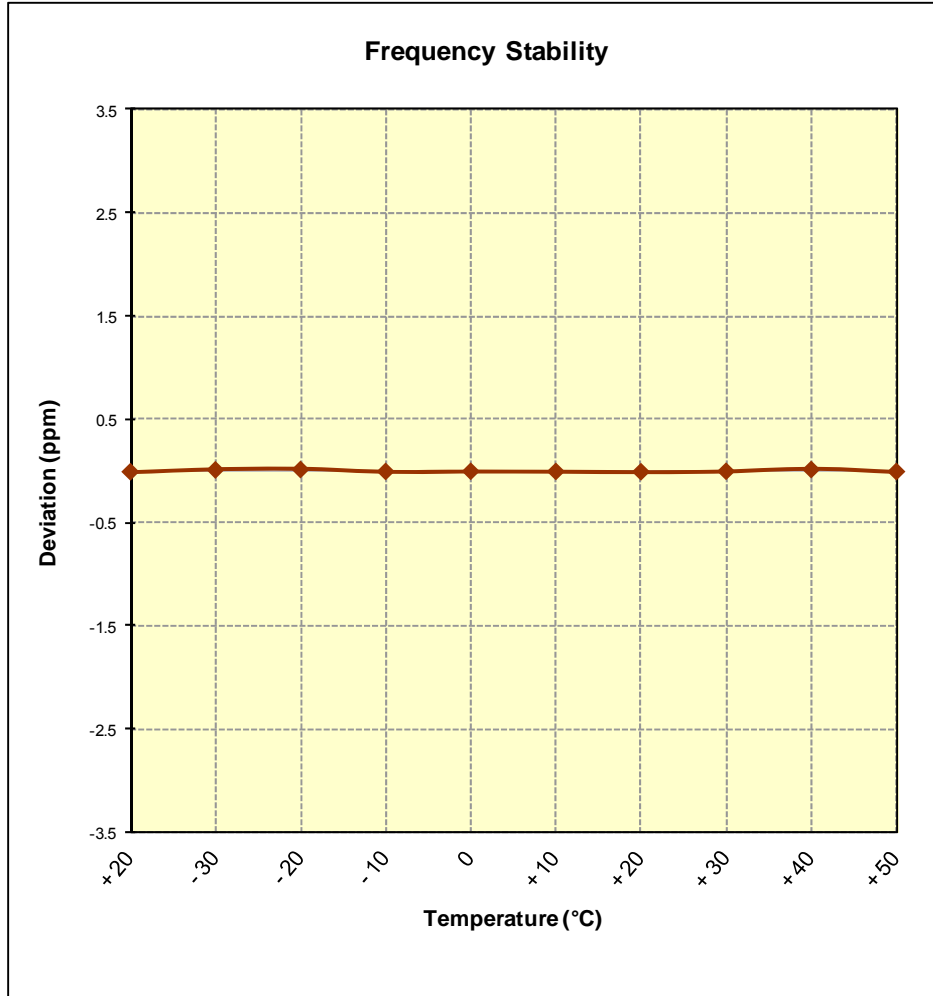**Band 4 Frequency Stability Measurements**  
§2.1055 §27.54



**Figure 6-10. Frequency Stability Graph (Band 4)**

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 161 of 164

## Band 2 Frequency Stability Measurements

§2.1055 §24.235



OPERATING FREQUENCY: 1,880,000,000 Hz  
 CHANNEL: 18900  
 REFERENCE VOLTAGE: 3.85 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	3.85	+ 20 (Ref)	1,879,999,983	-17	-0.0000009
100 %		- 30	1,879,999,988	-12	-0.0000006
100 %		- 20	1,880,000,011	11	0.0000006
100 %		- 10	1,879,999,986	-14	-0.0000007
100 %		0	1,879,999,984	-16	-0.0000009
100 %		+ 10	1,879,999,990	-10	-0.0000005
100 %		+ 20	1,879,999,983	-17	-0.0000009
100 %		+ 30	1,880,000,019	19	0.0000010
100 %		+ 40	1,879,999,986	-14	-0.0000007
100 %		+ 50	1,880,000,013	13	0.0000007
BATT. ENDPOINT		3.40	+ 20	1,879,999,975	-25


**Table 6-21. Frequency Stability Data (Band 2)**

**Note:**



Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset	Page 162 of 164	

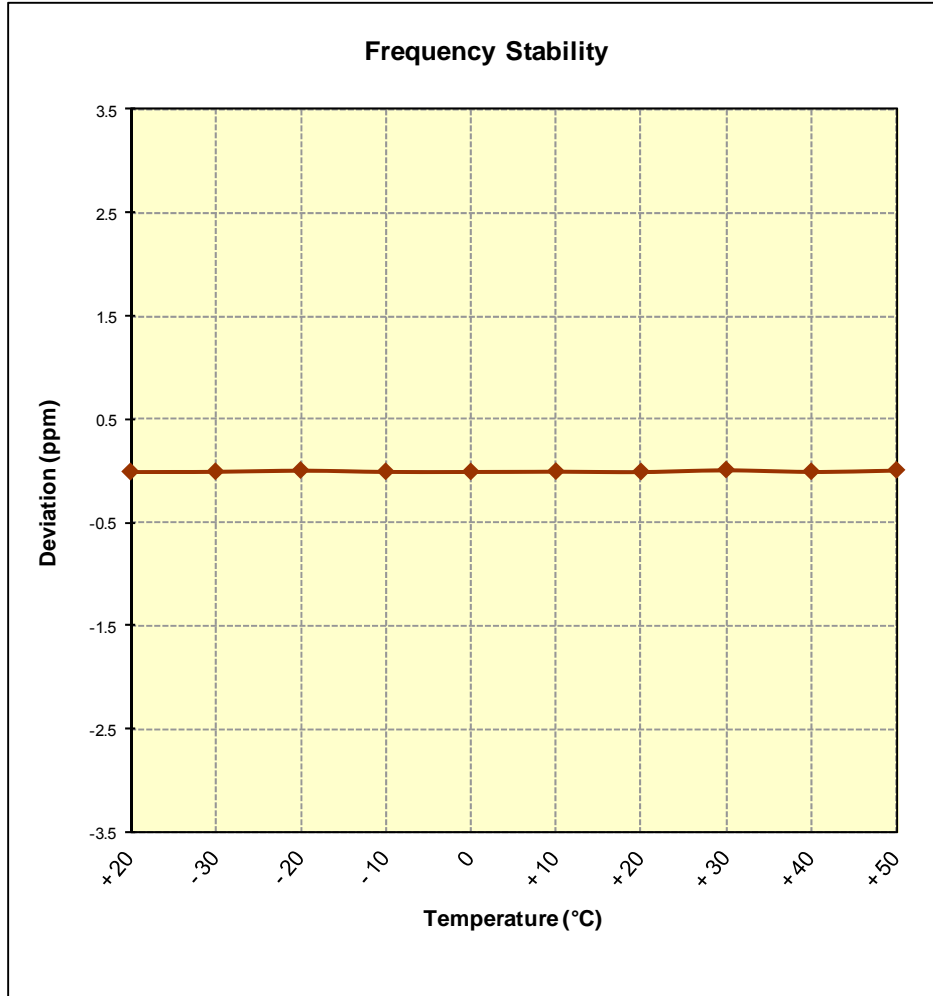**Band 2 Frequency Stability Measurements**  
§2.1055 §24.235





**Figure 6-11. Frequency Stability Graph (Band 2)**

<b>FCC ID:</b> A3LSMG800R4		<b>FCC Pt. 22, 24, &amp; 27 LTE MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1407241471.A3L	<b>Test Dates:</b> July 24 - Aug. 07, 2014	<b>EUT Type:</b> Portable Handset	Page 163 of 164	

## 7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG800R4** complies with all the requirements of Parts 22, 24, & 27 of the FCC rules for LTE operation only.

FCC ID: A3LSMG800R4		FCC Pt. 22, 24, & 27 LTE MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1407241471.A3L	Test Dates: July 24 - Aug. 07, 2014	EUT Type: Portable Handset		Page 164 of 164