



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

**ANT+
CERTIFICATION TEST REPORT**

FOR

GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC

MODEL NUMBER: SM-G850S; SM-G850K; SM-G850L

**FCC ID: A3LSMG850KOR
IC: 649E-SMG850KOR**

REPORT NUMBER: 14U17914-6 REVISION A

ISSUE DATE: AUG 7, 2014

**Prepared for
SAMSUNG ELECTRONICS CO., LTD.
416, MAETAN 3-DONG, YEONGTONG-GU
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

**Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	6/19/14	Initial Issue	P. Zhang
A	8/7/14	Updated band edge plot	P. Zhang

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>6</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>6</i>
5.5. <i>DESCRIPTION OF TEST SETUP</i>	<i>7</i>
6. TEST AND MEASUREMENT EQUIPMENT	9
7. LIMITS AND RESULTS	10
7.1. <i>99% BANDWIDTH.....</i>	<i>10</i>
7.2. <i>TRANSMITTER RADIATED EMISSIONS.....</i>	<i>13</i>
7.2.1. <i>DUTY CYCLE</i>	<i>15</i>
7.2.2. <i>FUNDAMENTAL FREQUENCY RADIATED EMISSION</i>	<i>16</i>
7.2.3. <i>TRANSMITTER RESTRICTED BAND EDGES</i>	<i>17</i>
7.2.4. <i>SPURIOUS BELOW 1 GHz.....</i>	<i>22</i>
8. AC POWER LINE CONDUCTED EMISSIONS	25
9. SETUP PHOTOS.....	29

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.
EUT DESCRIPTION: GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC
MODEL: SM-G850S; SM-G850K; SM-G850L
SERIAL NUMBER: 1883968 (Conducted), 1883967(Radiated)
DATE TESTED: MAY 29 – JUNE 19, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:



PENG ZHANG
CONSUMER TECHNOLOGY DIVISION
PROJECT LEAD
UL Verification Services Inc.

Tested By:



STEVEN TRAN
CONSUMER TECHNOLOGY DIVISION
TEST ENGINEER
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input checked="" type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC. SM-G850S, SM-G850K, SM-G850L are same hardware but for different carrier.

5.2. MAXIMUM OUTPUT FUNDAMENTAL FIELD STRENGTH

The ANT+ mode has maximum output fundamental field strength as follows:

Frequency Range (MHz)	Mode	Peak E-field Strength (dBuV/m)	Avg E-field Strength (dBuV/m)	Distance (m)
2402 - 2480	ANT +	72.51	71.23	3.00

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -3.64 dBi.

5.4. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT


Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	SM-G850S	N/A	N/A
Earphone	Samsung	SM-G850S	N/A	N/A

I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

TEST SETUP

The EUT is set to continuously transmit in ANT + test mode

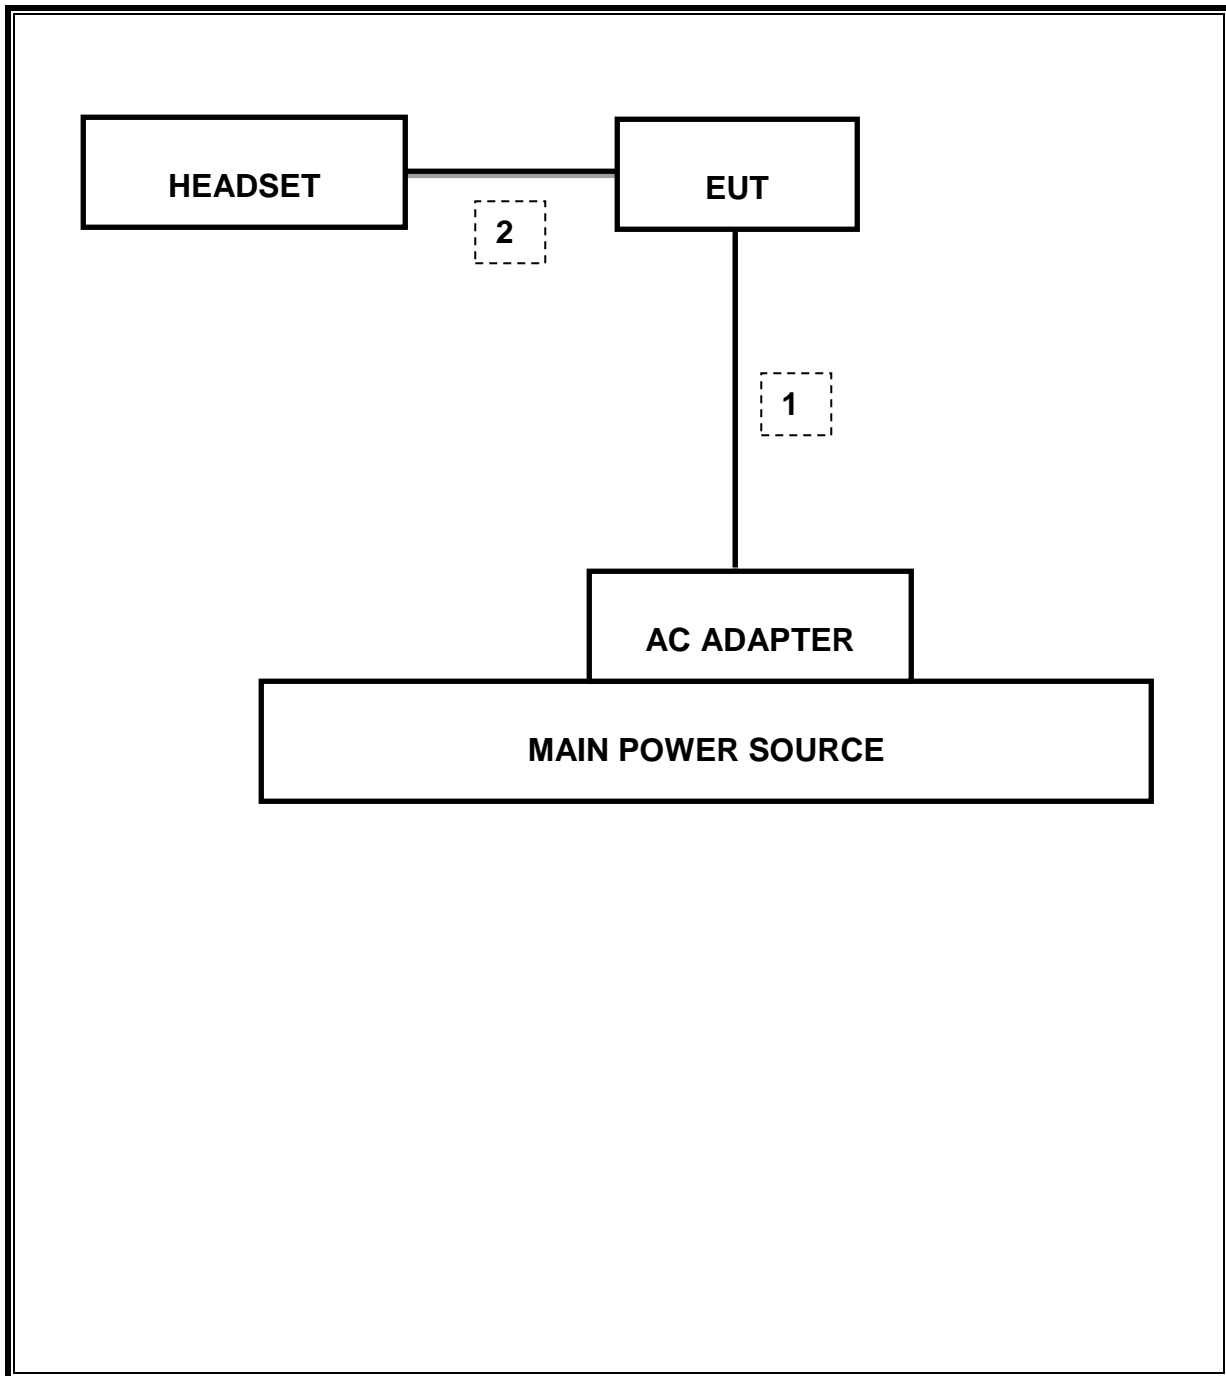

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00986	4/1/2015
Spectrum Analyzer, 26.5 GHz	Agilent / HP	E4440A	C01179	2/26/2015
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	8/8/2014
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	5/8/2015
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	10/22/2014
Antenna, Bilog, 30MHz-1 GHz	Sunol Sciences	JB1	N/A	3/6/2015
Antenna, Horn, 18 GHz	ETS	3117	C01022	2/21/2015
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00589	12/17/2014
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/2014
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/2014
LISN, 30 MHz	FCC	50/250-25-2	C00626	1/14/2015

7. LIMITS AND RESULTS

7.1. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Frequency (MHz)	99% Bandwidth (MHz)
2402	1.0238
2442	1.0185
2480	1.0235

99% BANDWIDTH

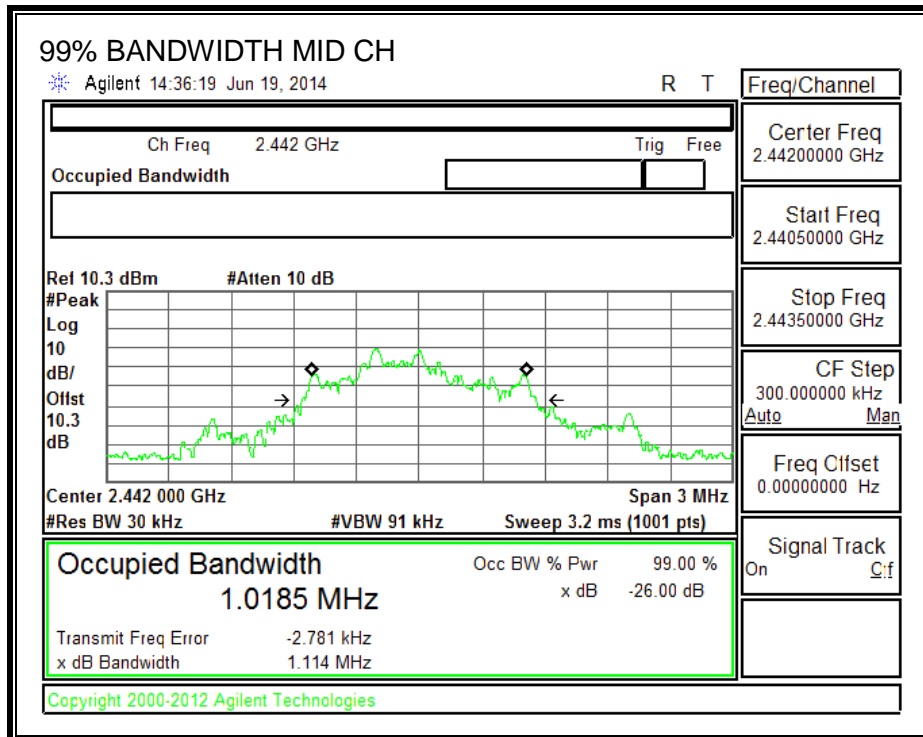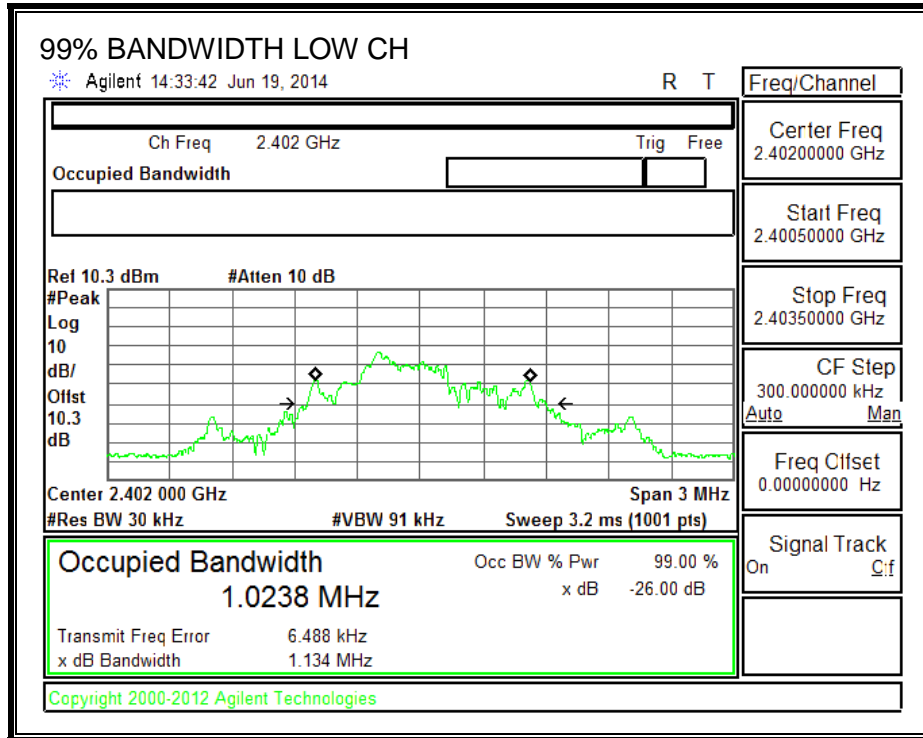

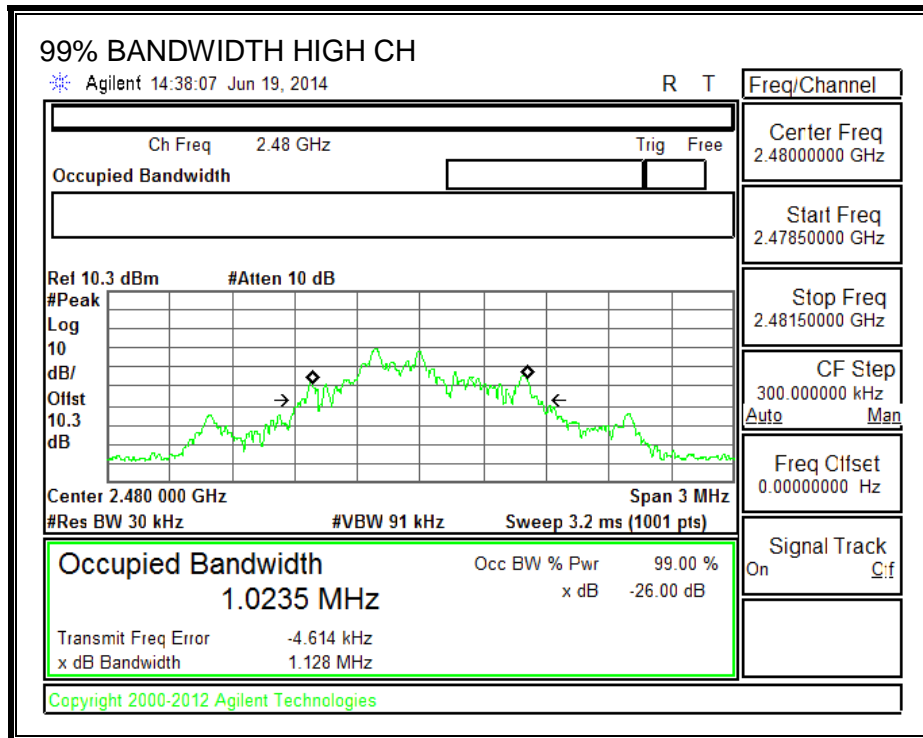

7.2. TRANSMITTER RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

IC RSS-210, A2.9
FCC 15.249

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.


(e) As shown in Sec. 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100 **	3
88-216	150 **	3
216-960	200 **	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

RESULTS

7.2.1. DUTY CYCLE

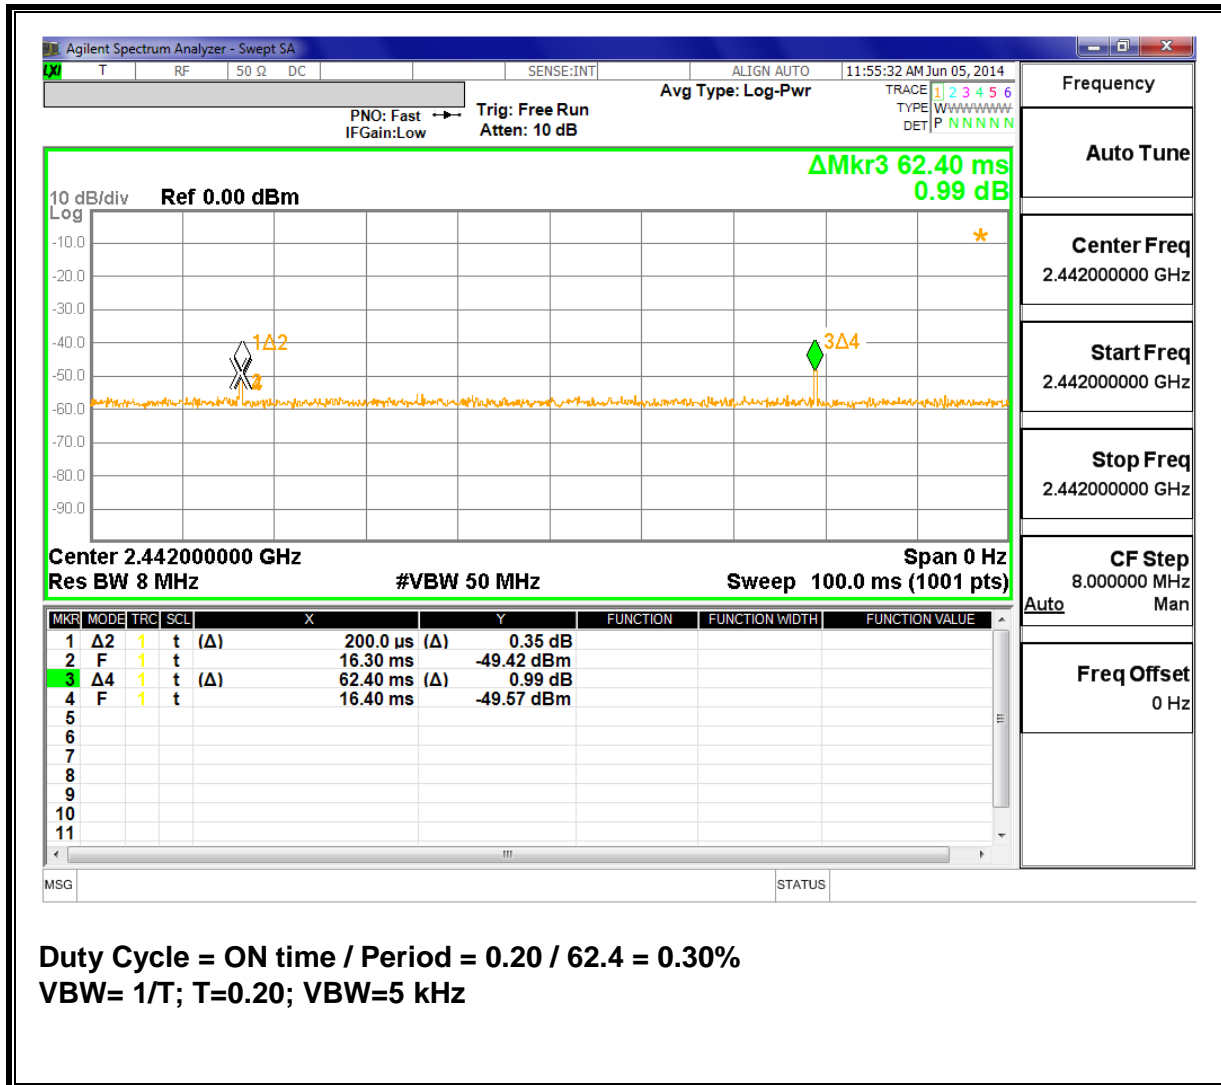

7.2.2. FUNDAMENTAL FREQUENCY RADIATED EMISSION



FCC, VCCI, CISPR, CE, AUSTEL, NZ
 UL, CSA, TUV, BSMI, DHHS, NVLAP
 47173 BENICIA STREET, FREMONT, CA 94538, USA

Project #: 14U17914
Report #: 14U17914
Date & Time: 06/04/14
Test Engr: K.Kedida

Company: Samsung
EUT Description: GSM/WCDMA/LTE + BLUETOOTH & WLAN (2.4 & 5GHZ) BAR PHONE
Test Configuration: X POSITION
Type of Test: FCC
Mode of Operation: Transmitting : ANT+ mode


M% = ((t1+t2+t3+...)/T) * 66.83% = 0.30%

Av Reading = Pk Reading + 20*log(M%)
20 * log (M%) = -50.46

Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (meter)
Low channel														
2402.00	53.42	53.27	32.10	-24.00	0.00	61.52	61.37	114.00	94.00	-52.48	-32.63	3mV	0.00	1.00
2402.00	59.26	58.52	32.10	-24.00	0.00	67.36	66.62	114.00	94.00	-46.64	-27.38	3mH	0.00	2.00
Mid channel														
2442.00	64.41	63.13	32.10	-24.00	0.00	72.51	71.23	114.00	94.00	-41.49	-22.77	3mV	0.00	1.00
2442.00	61.24	60.01	32.10	-24.00	0.00	69.34	68.11	114.00	94.00	-44.66	-25.89	3mH	0.00	2.00
High channel														
2480.00	61.22	59.32	32.10	-24.00	0.00	69.32	67.42	114.00	94.00	-44.68	-26.58	3mV	0.00	1.00
2480.00	55.59	55.36	32.10	-24.00	0.00	63.69	63.46	114.00	94.00	-50.31	-30.54	3mH	0.00	2.00

7.2.3. TRANSMITTER RESTRICTED BAND EDGES

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

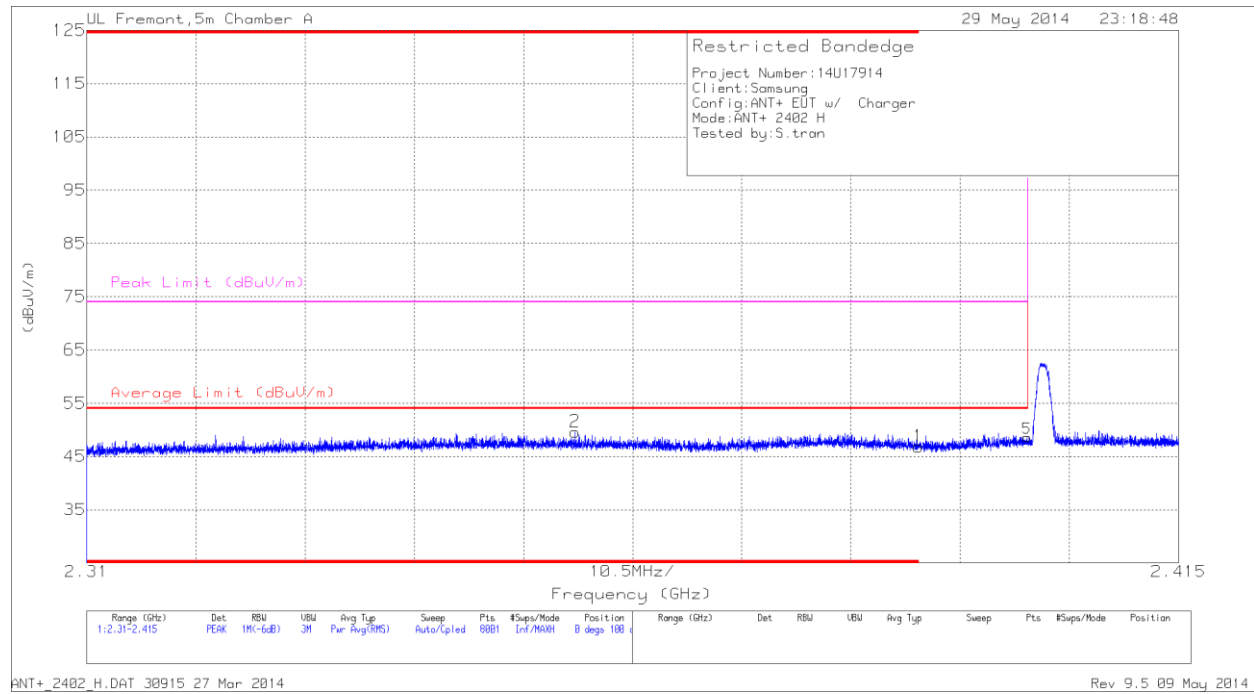

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	39.05	PK	32.2	-24.4	46.85	-	-	74	-27.15	0	100	H
2	2.357	41.42	PK	32	-23.8	49.62	-	-	74	-24.38	0	100	H
5	2.4	40.22	PK	32.3	-23.7	48.82	-	-	-	-	0	100	H

PK - Peak detector

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)
3	2.39	28.17	VB1T	32.2	-24.4	35.97	54	-18.03	-	-
4	2.382	28.19	VB1T	32.2	-23.6	36.79	54	-17.21	-	-
6	2.4	28.12	VB1T	32.3	-23.7	36.72	-	-	-	-

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

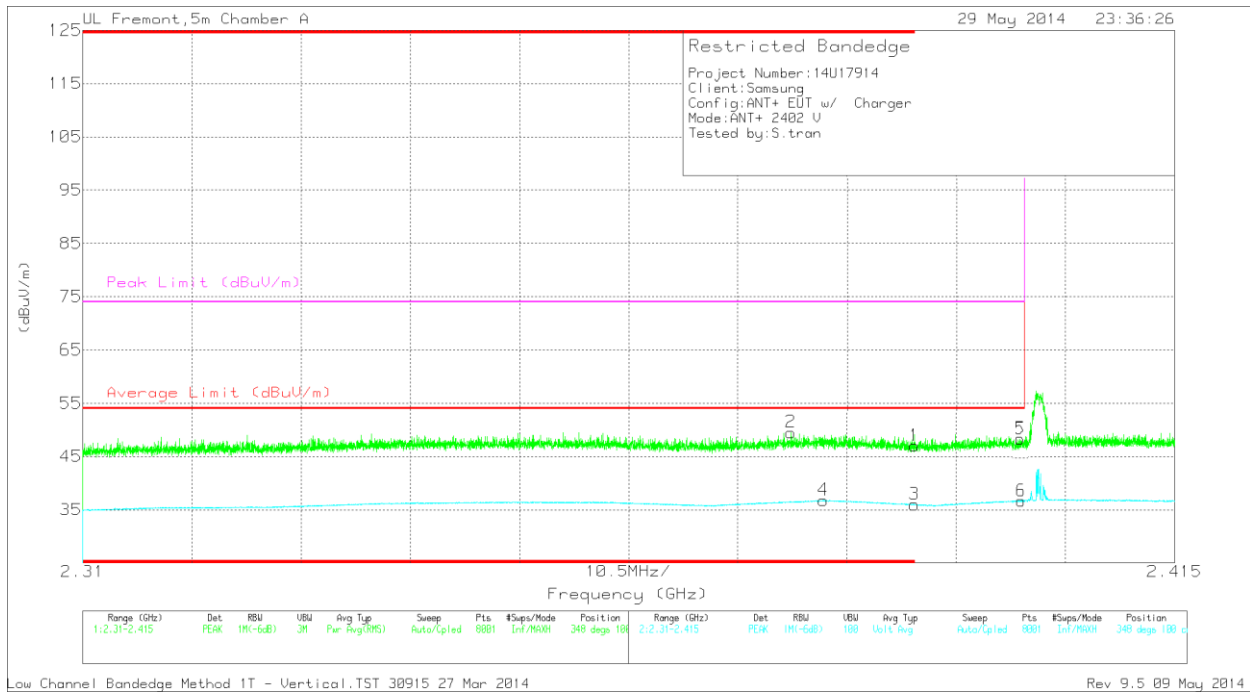


Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cb/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	2.39	39.22	PK	32.2	-24.4	47.02	-	-	74	-26.98	348	100	V
2	2.378	41.23	PK	32.1	-23.8	49.53	-	-	74	-24.47	348	100	V
5	2.4	40.19	PK	32.3	-23.8	48.69	-	-	-	-	348	100	V
3	2.39	28.18	VB1T	32.2	-24.4	35.98	54	-18.02	-	-	348	100	V
4	2.381	28.1	VB1T	32.2	-23.5	36.8	54	-17.2	-	-	348	100	V
6	2.4	28.09	VB1T	32.3	-23.7	36.69	-	-	-	-	348	100	V

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

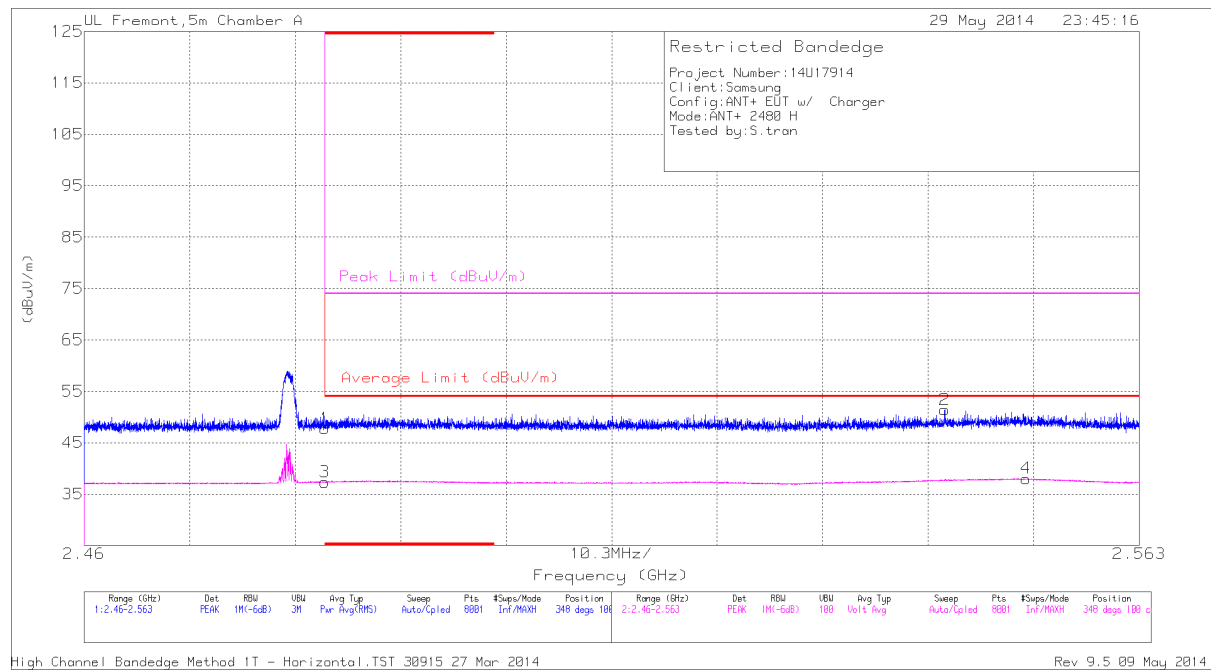

Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.55	PK	32.7	-23.5	47.75	-	-	74	-26.25	348	100	H
3	* 2.484	28.14	VB1T	32.7	-23.5	37.34	54	-16.66	-	-	348	100	H
2	2.544	41.81	PK	32.9	-23.3	51.41	-	-	74	-22.59	348	100	H
4	2.552	28.24	VB1T	32.9	-23.1	38.04	54	-15.96	-	-	348	100	H

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)

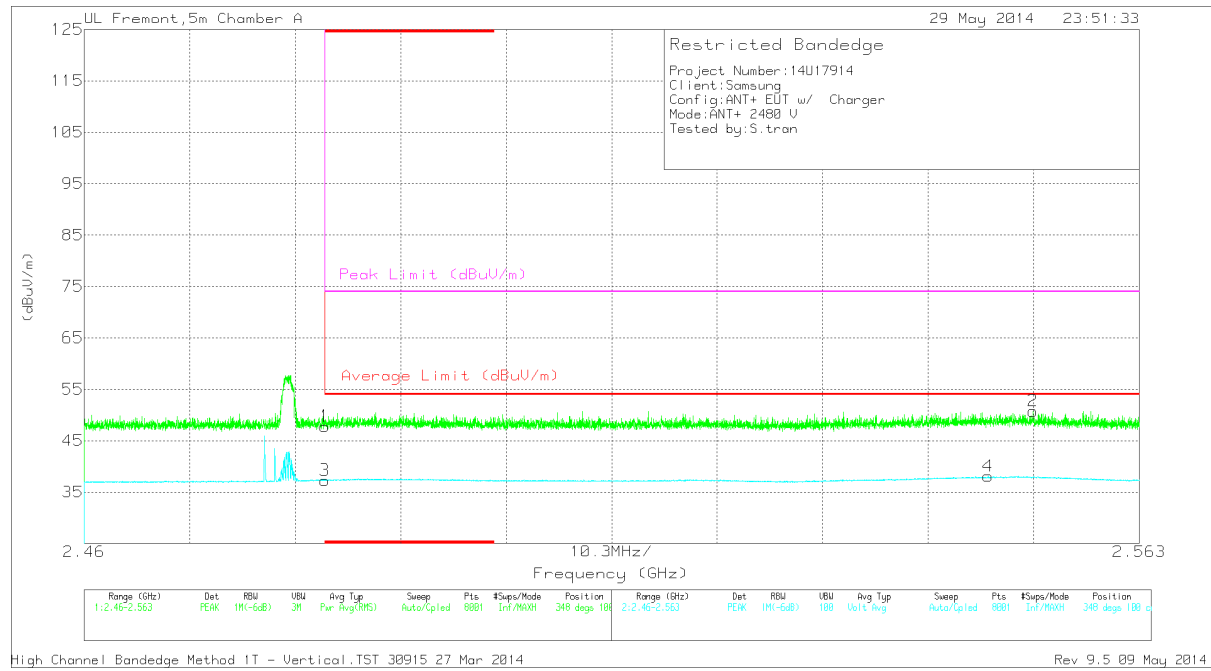

Trace Markers

Marker	Frequenc y (GHz)	Meter Reading (dBuV)	Det	AF T136 (dB/m)	Amp/Cbl/ Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.61	PK	32.7	-23.5	47.81	-	-	74	-26.19	348	100	V
3	* 2.484	28.07	VB1T	32.7	-23.5	37.27	54	-16.73	-	-	348	100	V
4	2.548	28.38	VB1T	32.9	-23.2	38.08	54	-15.92	-	-	348	100	V
2	2.553	41.06	PK	32.9	-23.2	50.76	-	-	74	-23.24	348	100	V


* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HARMONICS AND SPURIOUS EMISSIONS ABOVE 1GHZ

HARMONICS



FCC, VCCI, CISPR, CE, AUSTEL, NZ
 UL, CSA, TUV, BSMI, DHHS, NVLAP
 47173 BENICIA STREET, FREMONT, CA 94538, USA

Project #: 14U17914
Report #: 14U17914
Date & Time: 06/04/14
Test Engr: N. Sheridan

Company: Samsung
EUT Description: GSM/WCDMA/LTE + BLUETOOTH & WLAN (2.4 & 5GHZ) BAR PHONE
Test Configuration: X POSITION
Type of Test: FCC
Mode of Operation: Transmitting : ANT+ mode


M% = ((t1+t2+t3+...)/T) * 66.83% = 0.30%

Av Reading = Pk Reading + 20*log(M%)
 20 * log (M%) = -50.46


Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Pk Level (dBuV/m)	Av Level (dBuV/m)	Pk Limit FCC_B	Av Limit FCC_B	Pk Margin (dB)	Avg Margin (dB)	Pol (H/V)	Az (Deg)	Height (meter)
Low channel														
4804.00	39.17	38.76	32.10	-20.00	0.00	51.27	50.86	74.00	54.00	-22.73	-3.14	3mV	0.00	1.00
4804.00	39.56	38.96	32.10	-20.00	0.00	51.66	51.06	74.00	54.00	-22.34	-2.94	3mH	0.00	2.00
Mid channel														
4884.00	39.59	39.05	32.10	-20.00	0.00	51.69	51.15	74.00	54.00	-22.31	-2.85	3mV	0.00	1.00
4884.00	38.88	38.78	32.10	-20.00	0.00	50.98	50.88	74.00	54.00	-23.02	-3.12	3mH	0.00	2.00
High channel														
4960.00	39.39	39.10	32.10	-20.00	0.00	51.49	51.20	74.00	54.00	-22.51	-2.80	3mV	0.00	1.00
4960.00	39.72	38.79	32.10	-20.00	0.00	51.82	50.89	74.00	54.00	-22.18	-3.11	3mH	0.00	2.00

7.2.4. SPURIOUS BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (HORIZONTAL)

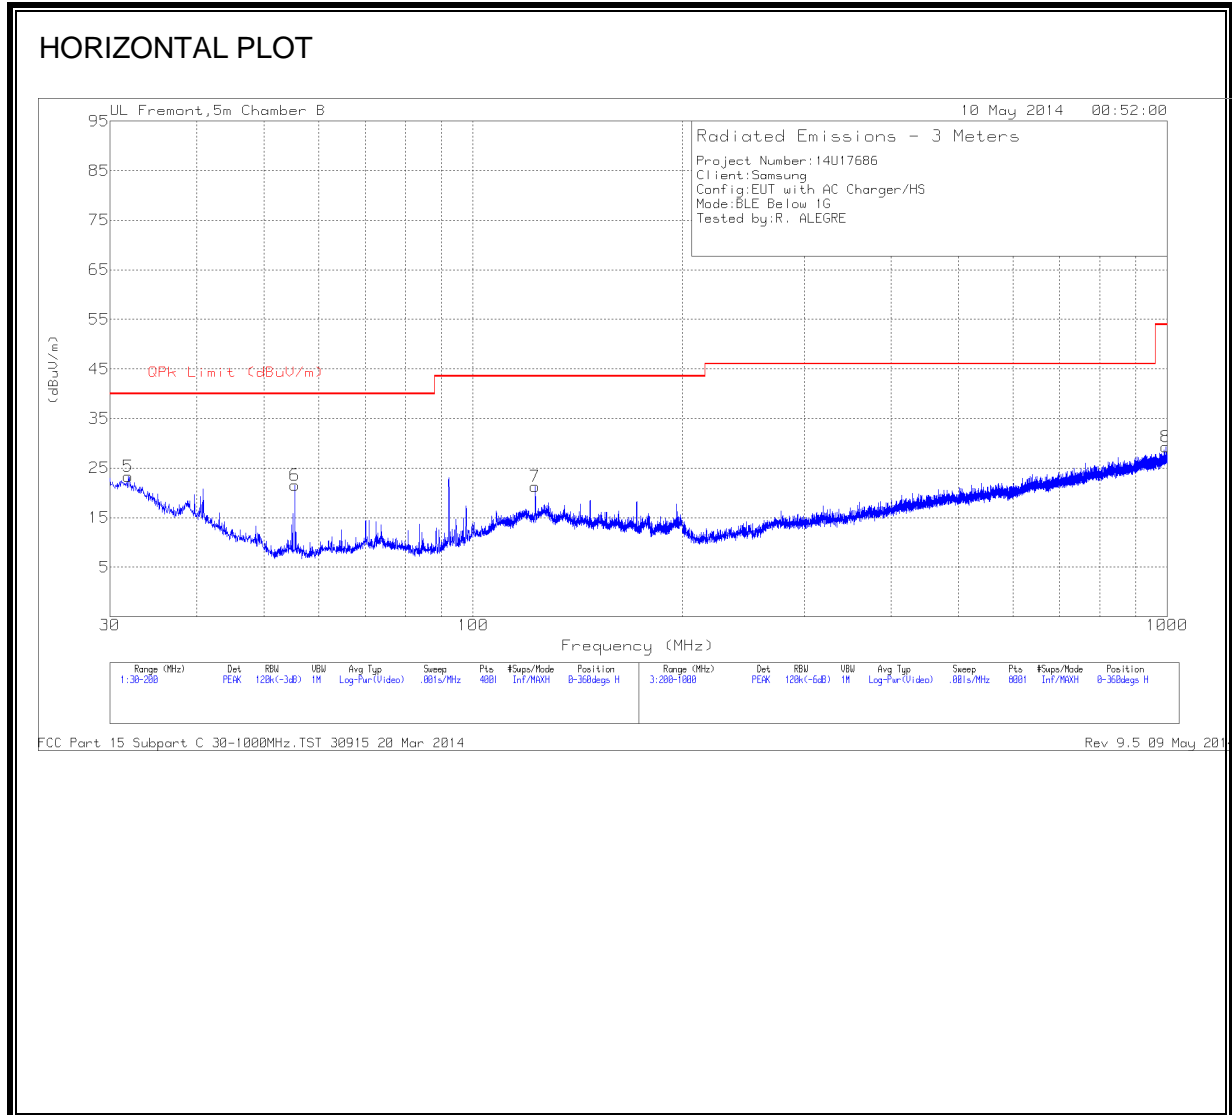

SPURIOUS EMISSIONS 30 TO 1000 MHz (VERTICAL)

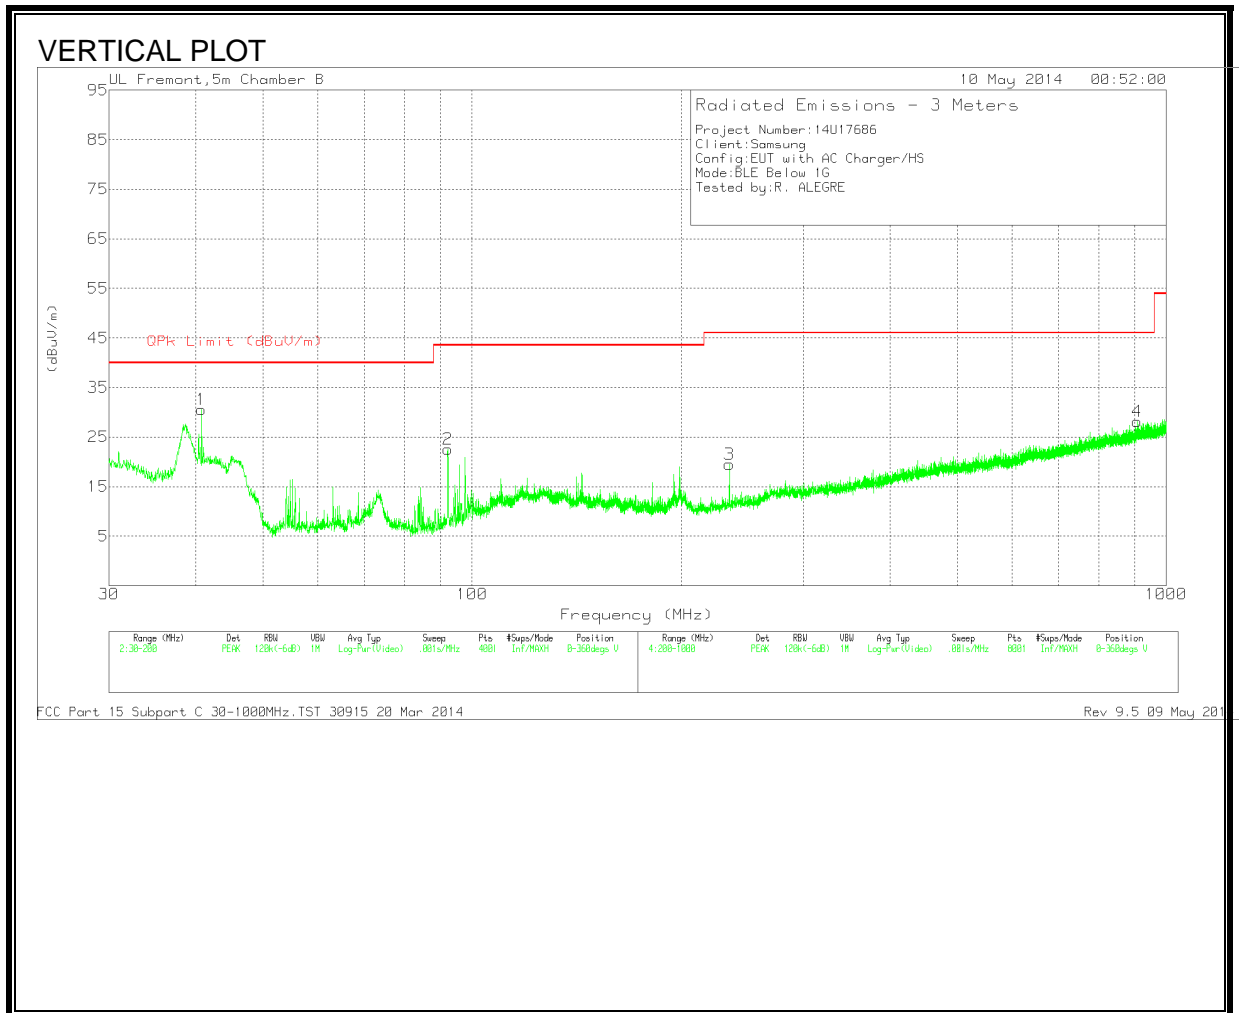

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
7	* 122.905	35.1	PK	14	-27.8	21.3	43.52	-22.22	0-360	200	H
8	* 995.8	28.08	PK	23.4	-22.2	29.28	53.97	-24.69	0-360	400	H
5	31.87	32.01	PK	20.1	-28.8	23.31	40	-16.69	0-360	200	H
1	40.795	45.9	PK	13.3	-28.6	30.6	40	-9.4	0-360	101	V
6	55.3725	42.84	PK	7.2	-28.5	21.54	40	-18.46	0-360	100	H
2	92.305	42.49	PK	8.2	-28.1	22.59	43.52	-20.93	0-360	101	V
3	234.8	34.55	PK	11.4	-26.5	19.45	46.02	-26.57	0-360	101	V
4	907.4	28.78	PK	22.4	-23	28.18	46.02	-17.84	0-360	300	V

* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4 - 2009

RESULTS

6 WORST EMISSIONS

Line-L1 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.195	41.86	PK	1	0	42.86	63.8	-20.94	-	-
2	.195	27.02	Av	1	0	28.02	-	-	53.8	-25.78
3	.348	50.17	PK	.5	0	50.67	59	-8.33	-	-
4	.348	41.37	Av	.5	0	41.87	-	-	49	-7.13
5	.9015	46.19	PK	.3	0	46.49	56	-9.51	-	-
6	.9015	30.13	Av	.3	0	30.43	-	-	46	-15.57
7	1.5945	48.79	PK	.2	.1	49.09	56	-6.91	-	-
8	1.5945	32.4	Av	.2	.1	32.7	-	-	46	-13.3
9	2.292	50.23	PK	.2	.1	50.53	56	-5.47	-	-
10	2.292	32.87	Av	.2	.1	33.17	-	-	46	-12.83
11	3.183	46.09	PK	.2	.1	46.39	56	-9.61	-	-
12	3.183	24.69	Av	.2	.1	24.99	-	-	46	-21.01
13	8.655	38.05	PK	.2	.1	38.35	60	-21.65	-	-
14	8.655	21.4	Av	.2	.1	21.7	-	-	50	-28.3
15	10.05	37.7	PK	.2	.2	38.1	60	-21.9	-	-
16	10.05	19.8	Av	.2	.2	20.2	-	-	50	-29.8
17	29.8635	36.21	PK	.3	.3	36.81	60	-23.19	-	-
18	29.8635	14.45	Av	.3	.3	15.05	-	-	50	-34.95


Line-L2 .15 - 30MHz

Trace Markers

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
19	.204	39.86	PK	1	0	40.86	63.4	-22.54	-	-
20	.204	19.77	Av	1	0	20.77	-	-	53.4	-32.63
21	.348	44.87	PK	.5	0	45.37	59	-13.63	-	-
22	.348	33.12	Av	.5	0	33.62	-	-	49	-15.38
23	.8925	42.04	PK	.3	0	42.34	56	-13.66	-	-
24	.8925	22.66	Av	.3	0	22.96	-	-	46	-23.04
25	1.104	43.54	PK	.3	.1	43.94	56	-12.06	-	-
26	1.104	21.05	Av	.3	.1	21.45	-	-	46	-24.55
27	1.806	45.2	PK	.2	.1	45.5	56	-10.5	-	-
28	1.806	25.84	Av	.2	.1	26.14	-	-	46	-19.86
29	2.184	46.59	PK	.2	.1	46.89	56	-9.11	-	-
30	2.184	25.47	Av	.2	.1	25.77	-	-	46	-20.23
31	2.2965	46.65	PK	.2	.1	46.95	56	-9.05	-	-
32	2.2965	26.56	Av	.2	.1	26.86	-	-	46	-19.14
33	2.6745	47.61	PK	.2	.1	47.91	56	-8.09	-	-
34	2.6745	26.23	Av	.2	.1	26.53	-	-	46	-19.47
35	2.8725	47.15	PK	.2	.1	47.45	56	-8.55	-	-
36	2.8725	23.42	Av	.2	.1	23.72	-	-	46	-22.28
39	9.6315	33.37	PK	.2	.2	33.77	60	-26.23	-	-
40	9.6315	16.97	Av	.2	.2	17.37	-	-	50	-32.63
37	9.7395	35.25	PK	.2	.2	35.65	60	-24.35	-	-
38	9.7395	15.58	Av	.2	.2	15.98	-	-	50	-34.02
41	28.689	28.37	PK	.3	.3	28.97	60	-31.03	-	-
42	28.689	17.77	Av	.3	.3	18.37	-	-	50	-31.63
43	29.9715	27.62	PK	.3	.3	28.22	60	-31.78	-	-
44	29.9715	11.65	Av	.3	.3	12.25	-	-	50	-37.75

PK - Peak detector
 Av - average detection

LINE 1 RESULTS

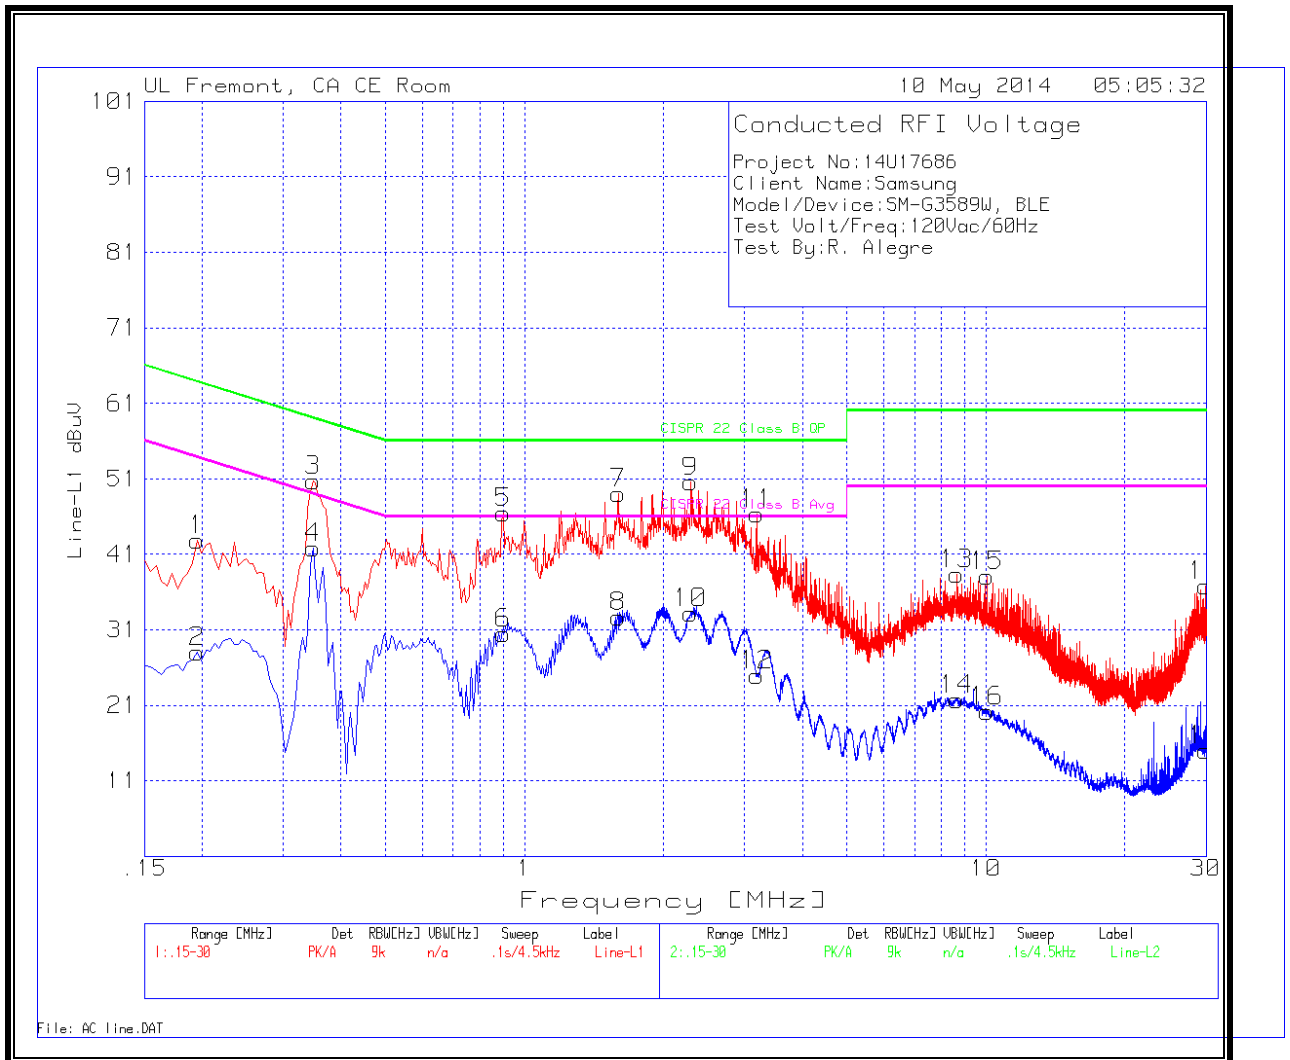

LINE 2 RESULTS

