



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 8**

**CERTIFICATION TEST REPORT  
FOR  
GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ & NFC**

**MODEL NUMBER: SM-G850S; SM-G850K; SM-G850L  
FCC ID: A3LSMG850KOR  
IC ID: 649E-SMG850KOR**

**REPORT NUMBER: 14U17914-2  
ISSUE DATE: JUNE 6, 2014**

*Prepared for*  
**SAMSUNG ELECTRONICS CO., LTD.  
416, MAETAN 3-DONG, YEONGTONG-GU  
SUWON-CITY, GYEONGGI-DO 443-742, SOUTH KOREA**

*Prepared by*  
**UL VERIFICATION SERVICES INC.  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
--	06/06/14	Initial issue	P. Zhang

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	<i>7</i>
5.4. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.5. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>7. SUMMARY TABLE .....</b>	<b>12</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>13</b>
8.1. <i>20 dB AND 99% BANDWIDTH .....</i>	<i>13</i>
8.1.1. <i>BASIC DATA RATE GFSK MODULATION .....</i>	<i>13</i>
8.1.1. <i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>13</i>
8.2. <i>HOPPING FREQUENCY SEPARATION .....</i>	<i>22</i>
8.3. <i>NUMBER OF HOPPING CHANNELS.....</i>	<i>24</i>
8.4. <i>AVERAGE TIME OF OCCUPANCY.....</i>	<i>27</i>
8.5. <i>OUTPUT POWER.....</i>	<i>31</i>
8.5.1. <i>BASIC DATA RATE GFSK MODULATION .....</i>	<i>31</i>
8.5.2. <i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>31</i>
8.6. <i>AVERAGE POWER.....</i>	<i>36</i>
8.6.1. <i>BASIC DATA RATE GFSK MODULATION .....</i>	<i>36</i>
8.6.2. <i>DATA RATE PI/4-DQPSK MODULATION .....</i>	<i>36</i>
8.6.3. <i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>37</i>
8.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>38</i>
8.7.1. <i>BASIC DATA RATE GFSK MODULATION .....</i>	<i>39</i>
8.7.1. <i>ENHANCED DATA RATE 8PSK MODULATION .....</i>	<i>43</i>
<b>9. RADIATED TEST RESULTS.....</b>	<b>47</b>
9.1. <i>LIMITS AND PROCEDURE .....</i>	<i>47</i>

---

9.2.	<i>TRANSMITTER ABOVE 1 GHz</i> .....	48
9.2.1.	BASIC DATA RATE GFSK MODULATION.....	48
9.2.2.	ENHANCED DATA RATE 8PSK MODULATION.....	61
9.3.	<i>WORST-CASE BELOW 1 GHz</i> .....	74
10.	<b>AC POWER LINE CONDUCTED EMISSIONS</b> .....	77
11.	<b>SETUP PHOTOS</b> .....	81

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SAMSUNG ELECTRONICS CO., LTD.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac & ANT+  
**MODEL:** SM-G850S; SM-G850K; SM-G850L  
**SERIAL NUMBER:** 1883968 (Conducted), 1883967(Radiated)  
**DATE TESTED:** MAY 30 – JUNE 5, 2014

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 ISSUE 8	Pass
INDUSTRY CANADA RSS-GEN ISSUE 3	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



PENG ZHANG  
CONSUMER TECHNOLOGY DIVISION  
PROJECT LEAD  
UL Verification Services Inc.

CHARLES VERGONIO  
CONSUMER TECHNOLOGY DIVISION  
LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A	<input type="checkbox"/> Chamber D
<input checked="" type="checkbox"/> Chamber B	<input type="checkbox"/> Chamber E
<input type="checkbox"/> Chamber C	<input type="checkbox"/> Chamber F

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 18000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac & ANT+. SM-G850S, SM-G850K, SM-G850L are same hardware but for different carrier.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	6.51	4.48
2402 - 2480	Enhanced 8PSK	6.58	4.55

Note: GFSK, Pi/4-DQPSK, 8PSK average Power are all investigated, The GFSK & 8PSK Power are the worst case. Testing is based on this mode to showing compliance. For average power data please refer to section 8.6.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an FPCB antenna, with a maximum gain of -3.64 dBi.

#### **5.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 5.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SAMSUNG	EP-TA11KWK	N/A	N/A
Earphone	SAMSUNG	N/A	N/A	N/A


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	DC Power	1	Mini-USB	Shielded	1.2m	N/A
2	Audio	1	Mini-Jack	Unshielded	1m	N/A

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests. EUT was set in the Hidden menu mode to enable BT communications.

**SETUP DIAGRAM FOR TESTS**

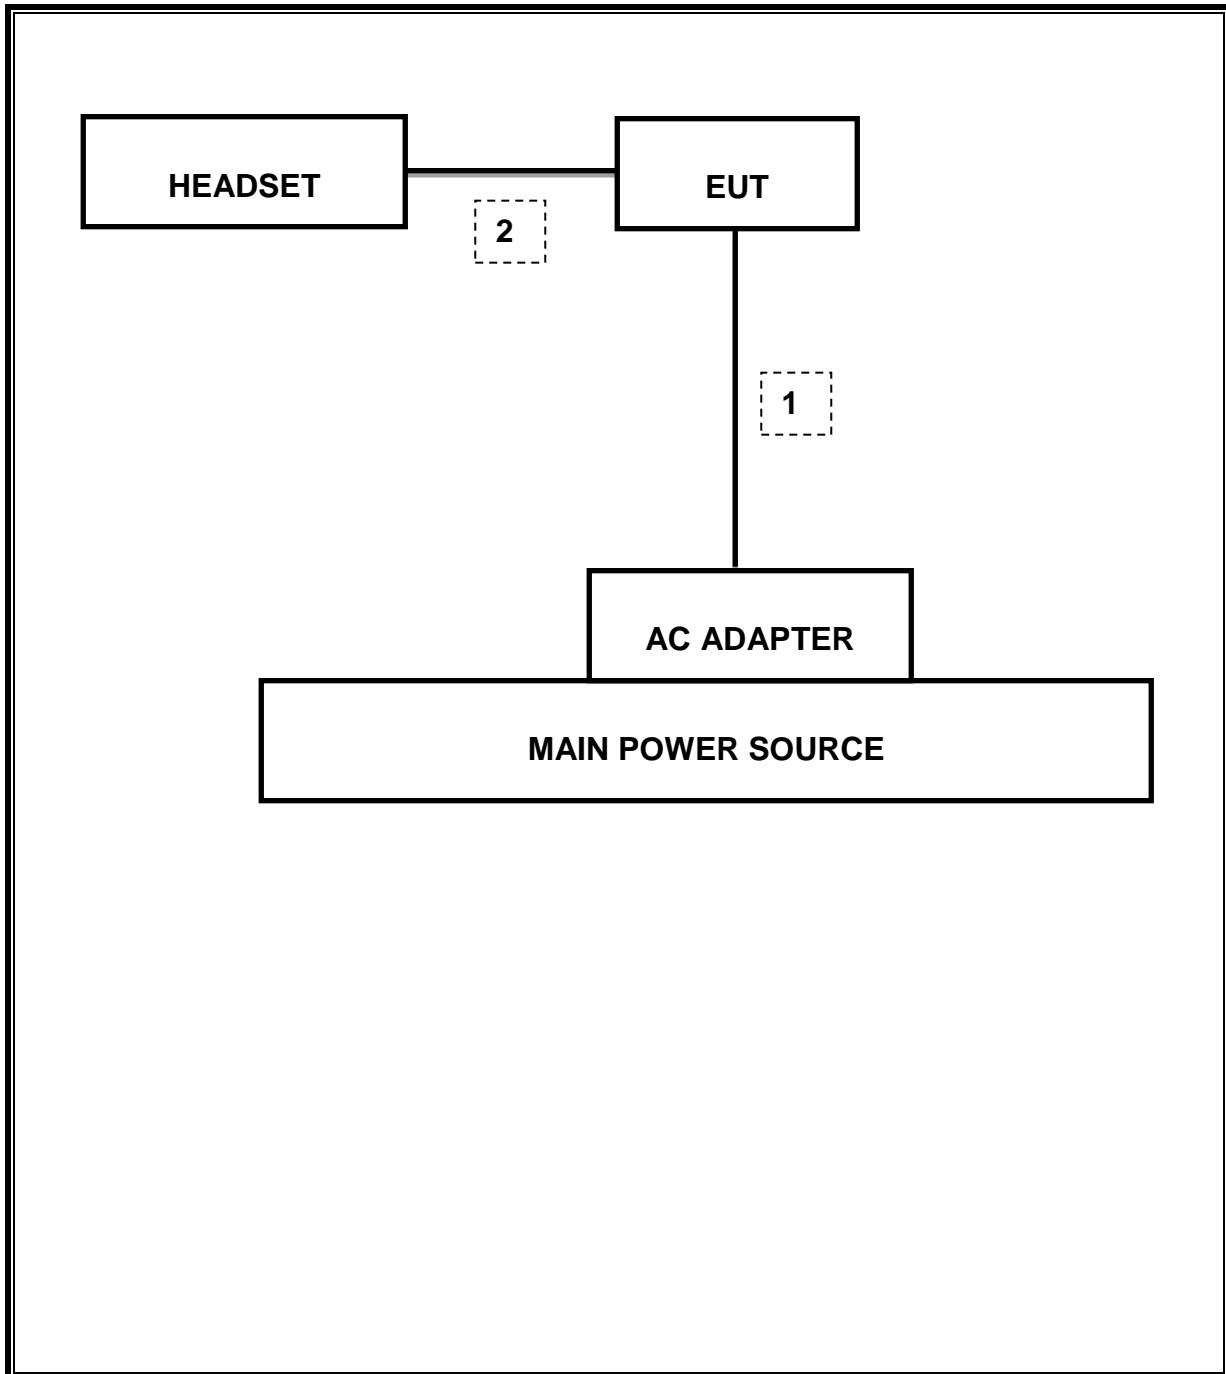

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Biconolog, 30MHz-1 GHz	Sunol Sciences	JB1	C01171	02/13/15
Antenna, Horn, 18GHz	EMCO	3115	C00783	10/25/14
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	11/14/14
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00580	01/28/15
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	10/22/14
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	12/20/14
CBT Bluetooth Tester	R & S	CBT	None	07/12/14
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14
LISN, 30 MHz	FCC	50/250-25-2	C00626	01/14/15
Reject Filter, 2.4GHz	Micro-Tronics	BRM50702	N02684	CNR
Peak Power Meter	Agilent / HP	E4416A	C00963	12/13/14
Peak / Average Power Sensor	Agilent / HP	E9327A	C00964	12/13/14

## 7. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Worst Case
2.1049	RSS-GEN 4.6	Occupied Band width (99%)	N/A	Conducted	Pass	1.477MHz
2.1051, 15.247 (d)	RSS-210 A8.5	Band Edge / Conducted Spurious Emission	-20dBc		Pass	-29.06dBm
15.247 (b)(1)	RSS-210 A8.4	TX conducted output power	<21dBm		Pass	6.58dBm
15.247 (a)(1)	RSS-210 A8.1(b)	Hopping frequency separation	> 25KHz		Pass	1MHz
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Number of Hopping channels	More than 15 non-overlapping channels		Pass	79
15.247 (a)(1)(iii)	RSS-210 A8.1(d)	Avg Time of Occupancy	< 0.4sec		Pass	0.245sec
15.207 (a)	RSS-GEN 7.2.2	AC Power Line conducted emissions	Section 10		Radiated	Pass
15.205, 15.209	RSS-210 Clause 2.6, RSS-210 Clause 6	Radiated Spurious Emission	< 54dBuV/m	Pass		51.18dBuV/m

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 20 dB AND 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.

#### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq$  1% of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS



##### 8.1.1. BASIC DATA RATE GFSK MODULATION


Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	0.9218	0.859
Middle	2441	0.9224	0.822
High	2480	0.9228	0.907
Worst		0.9228	0.907

##### 8.1.1. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	2402	1.36	1.477
Middle	2441	1.34	1.3682
High	2480	1.34	1.2487
Worst		1.36	1.477


**GFSK 20 dB BANDWIDTH**

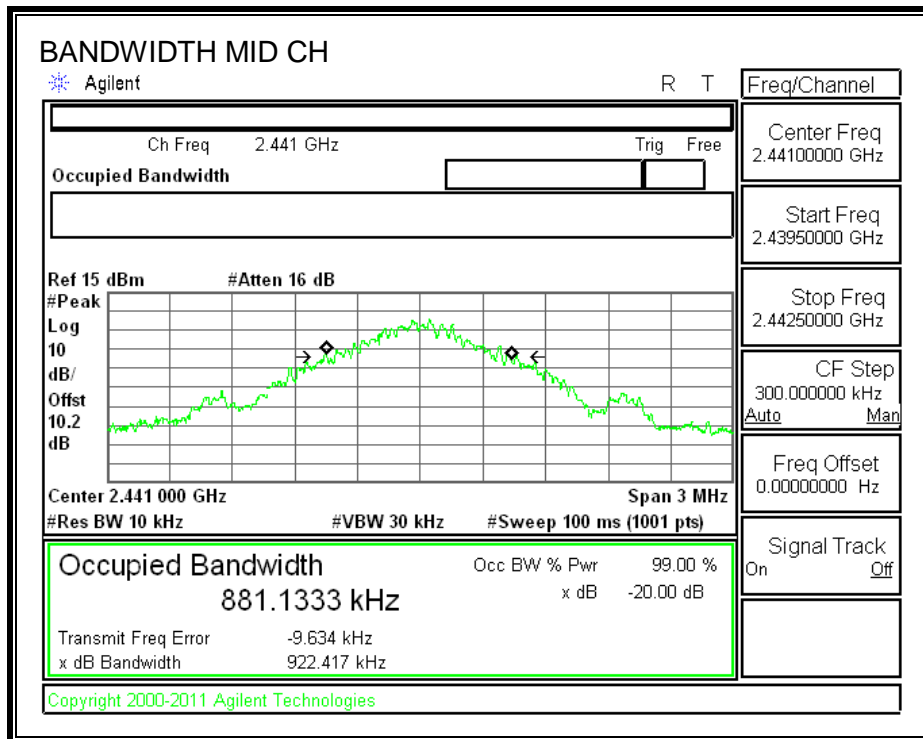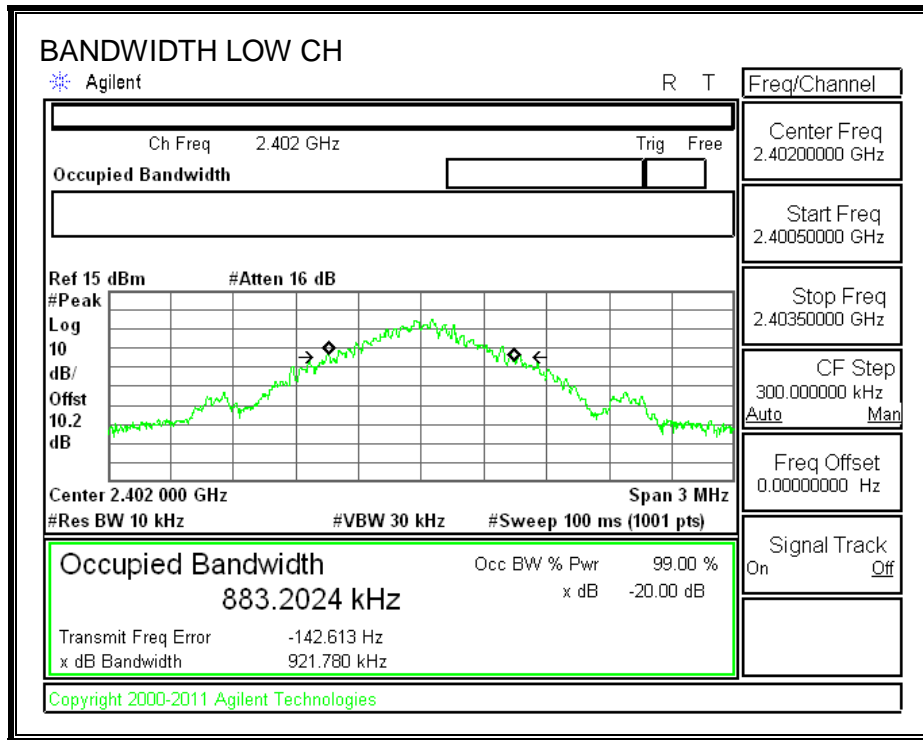


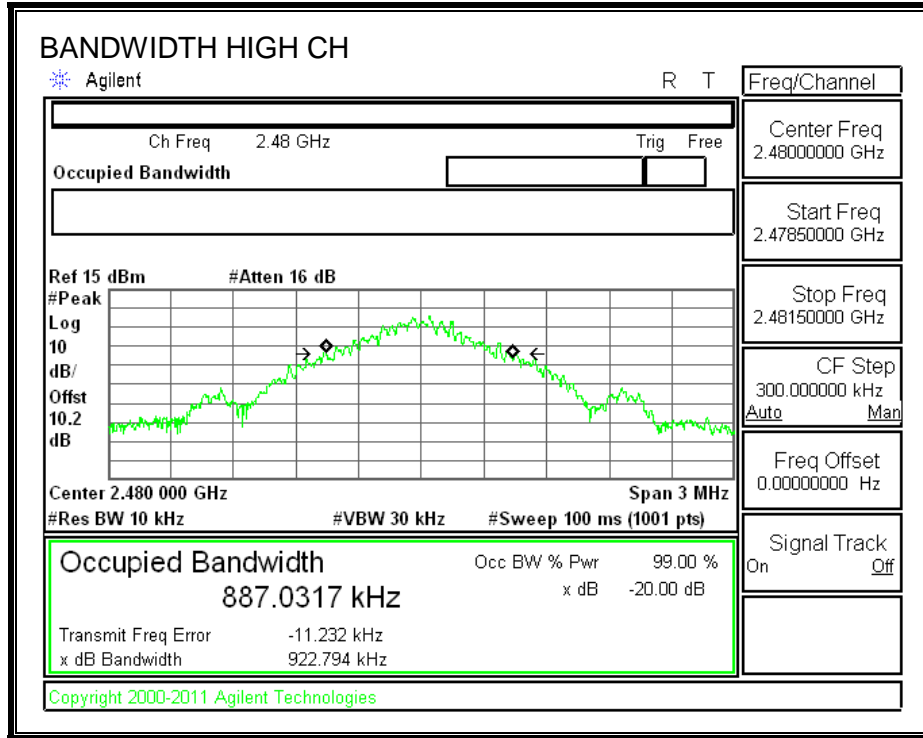



**GFSK 99% BANDWIDTH**

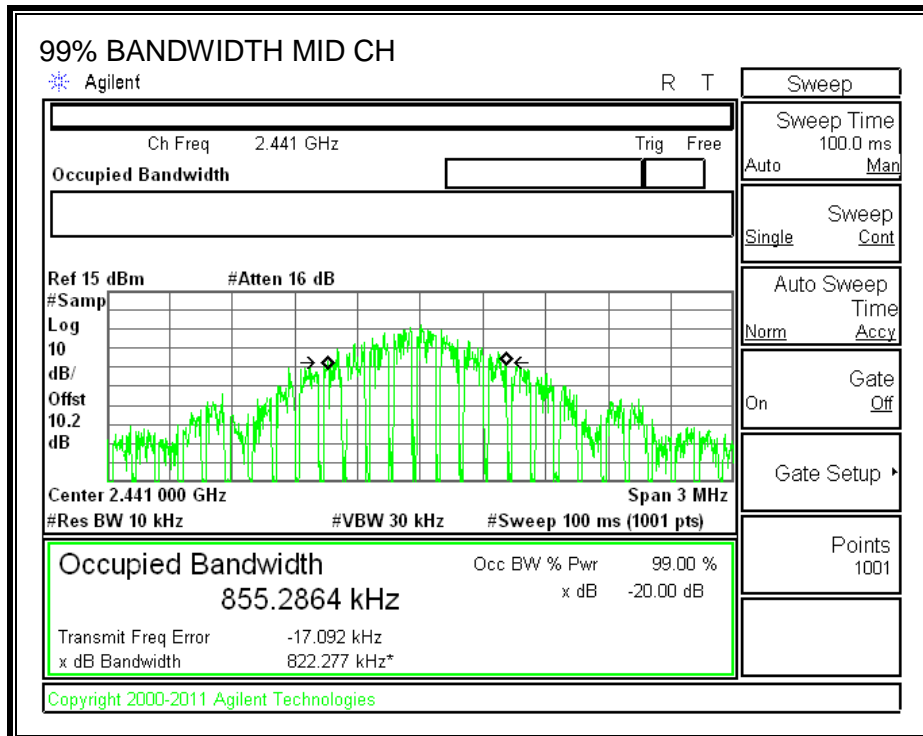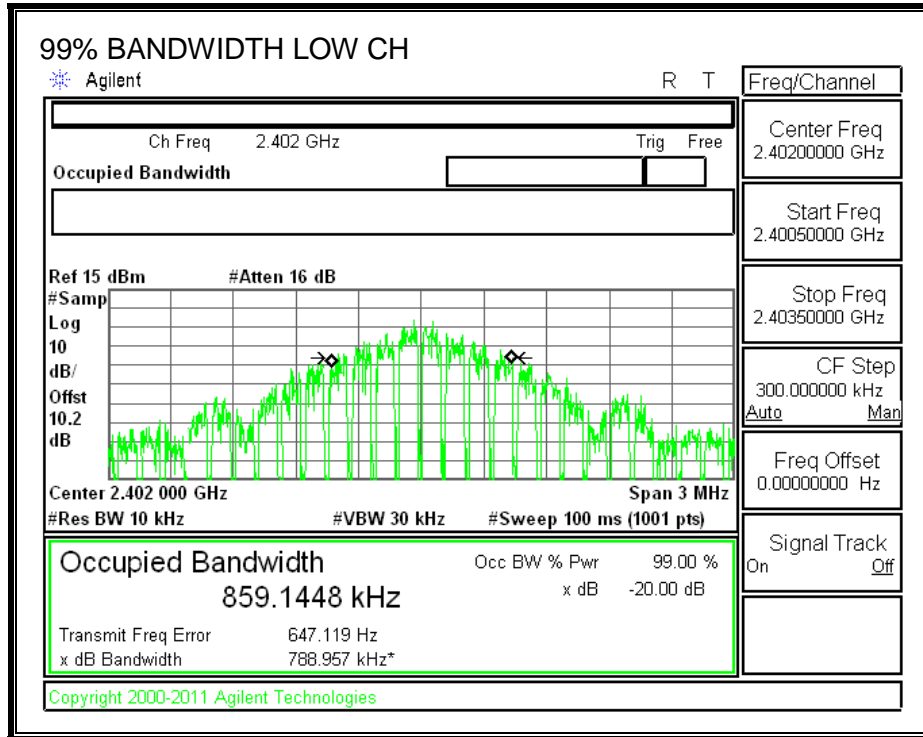


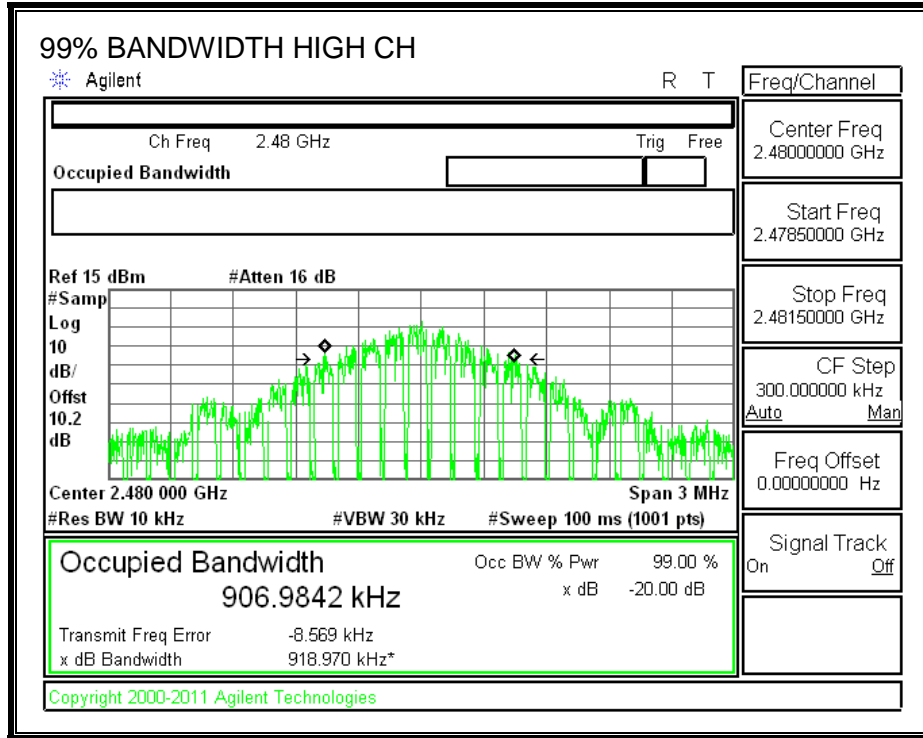



**8PSK 20 dB BANDWIDTH**

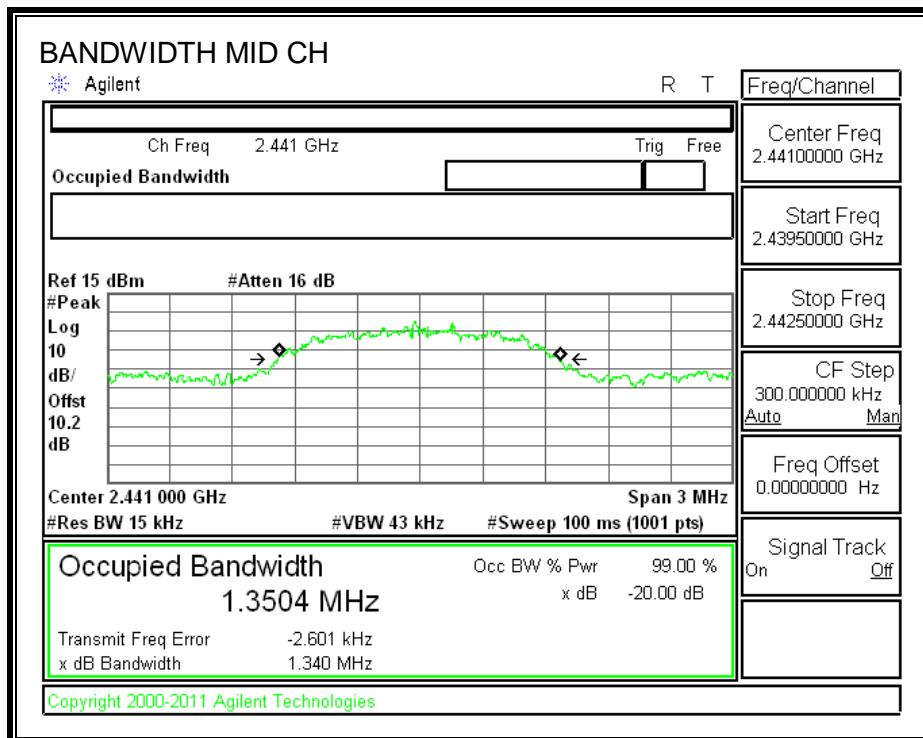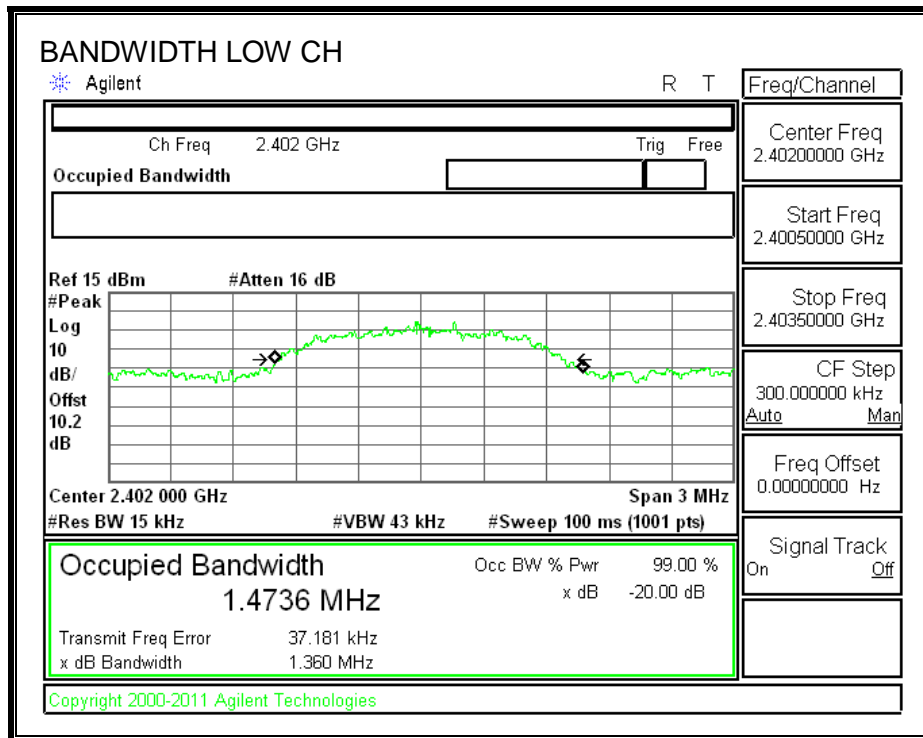

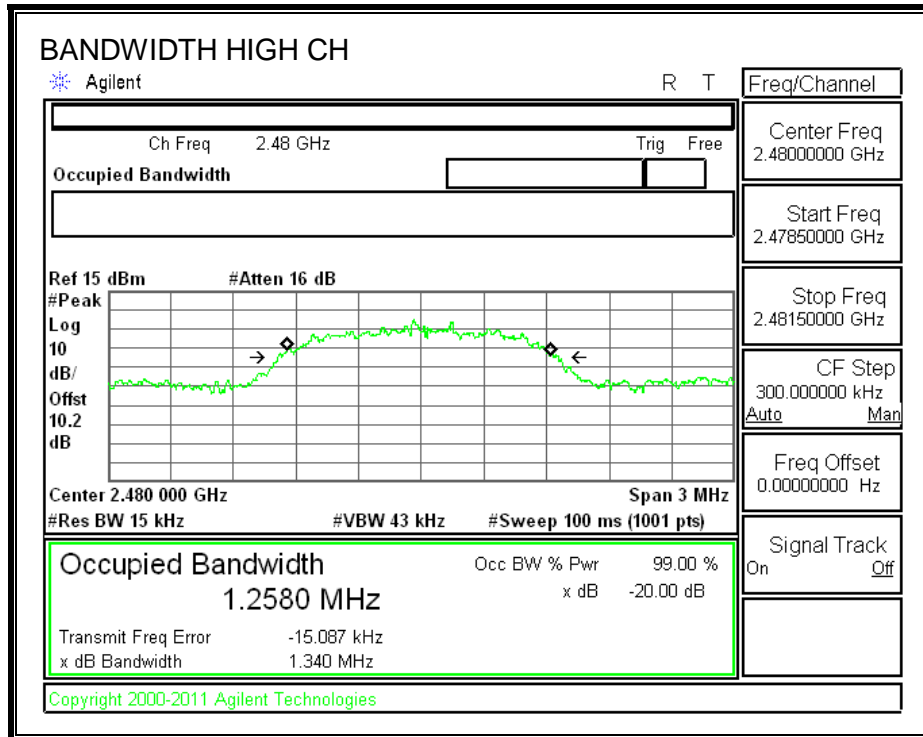

**8PSK 99% BANDWIDTH**

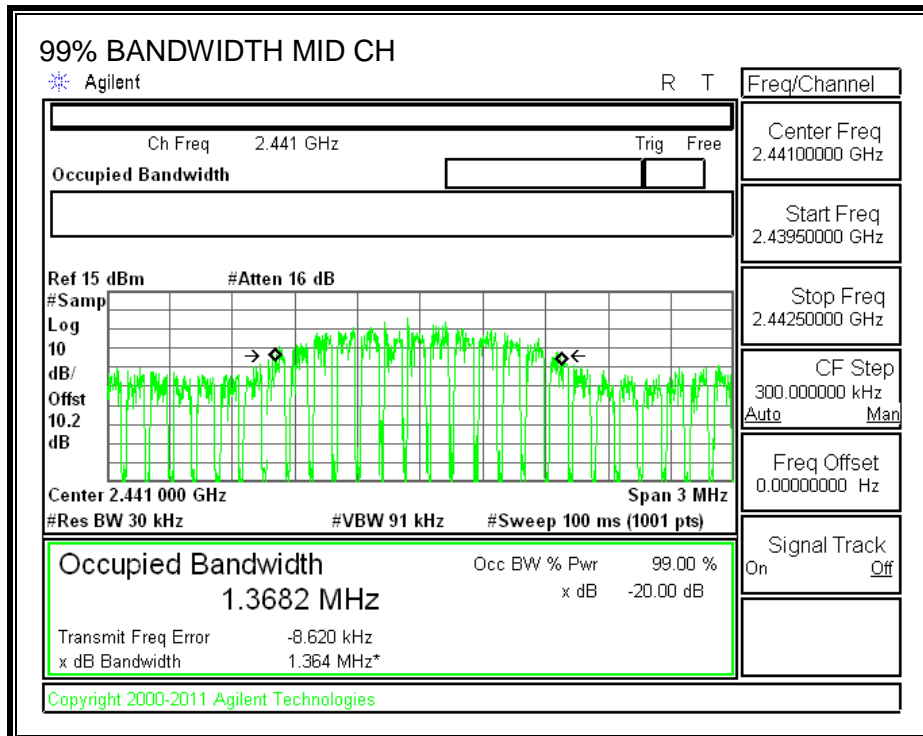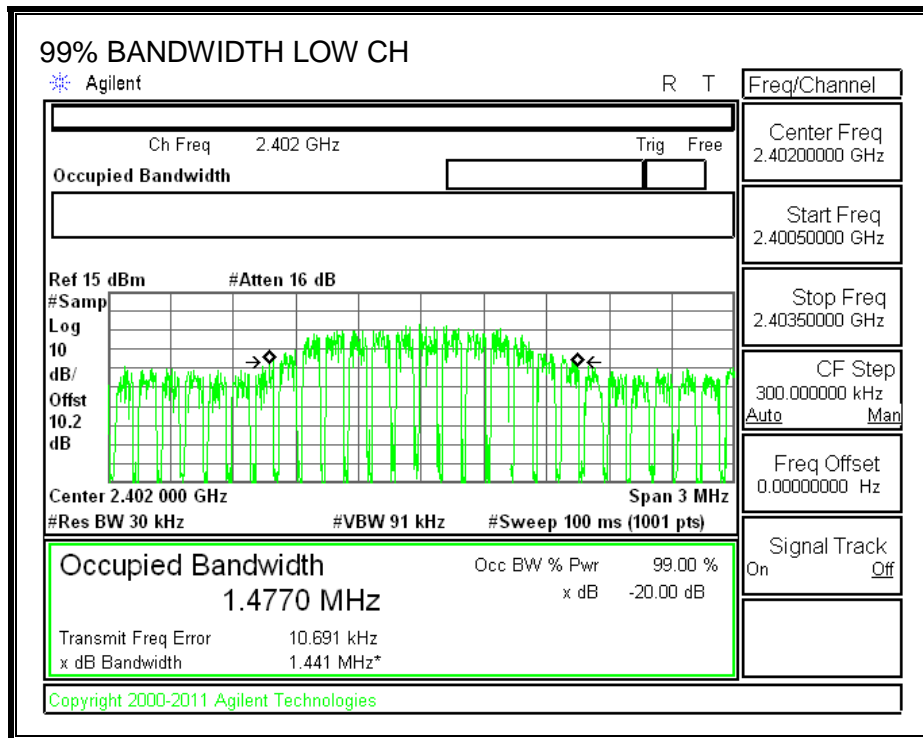

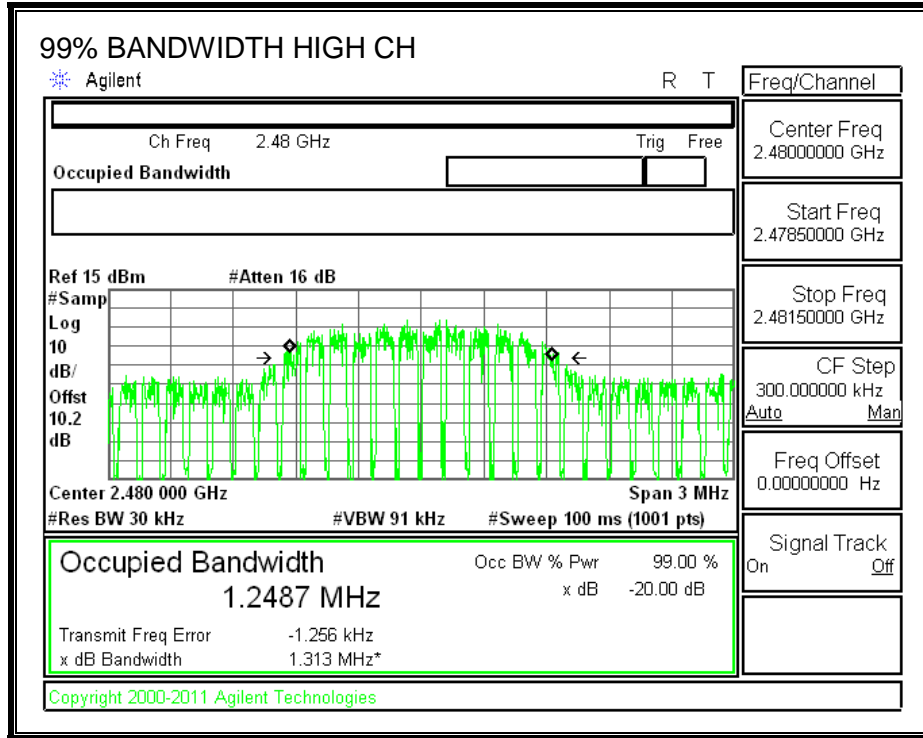

## **8.2. HOPPING FREQUENCY SEPARATION**

### **LIMIT**

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **TEST PROCEDURE**

DA 00-705: The transmitter output is connected to a spectrum analyzer. The RBW is set to 300 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

### **RESULTS**

**HOPPING FREQUENCY SEPARATION**

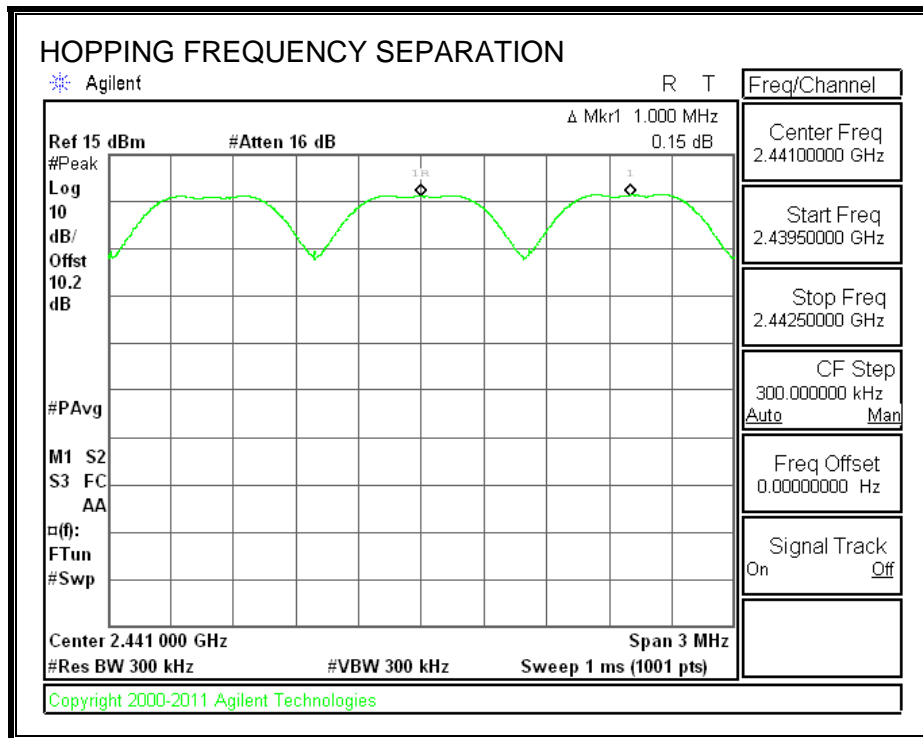

### **8.3. NUMBER OF HOPPING CHANNELS**

#### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### **TEST PROCEDURE**



DA 00-705: The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

#### **RESULTS**

Normal Mode: 79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

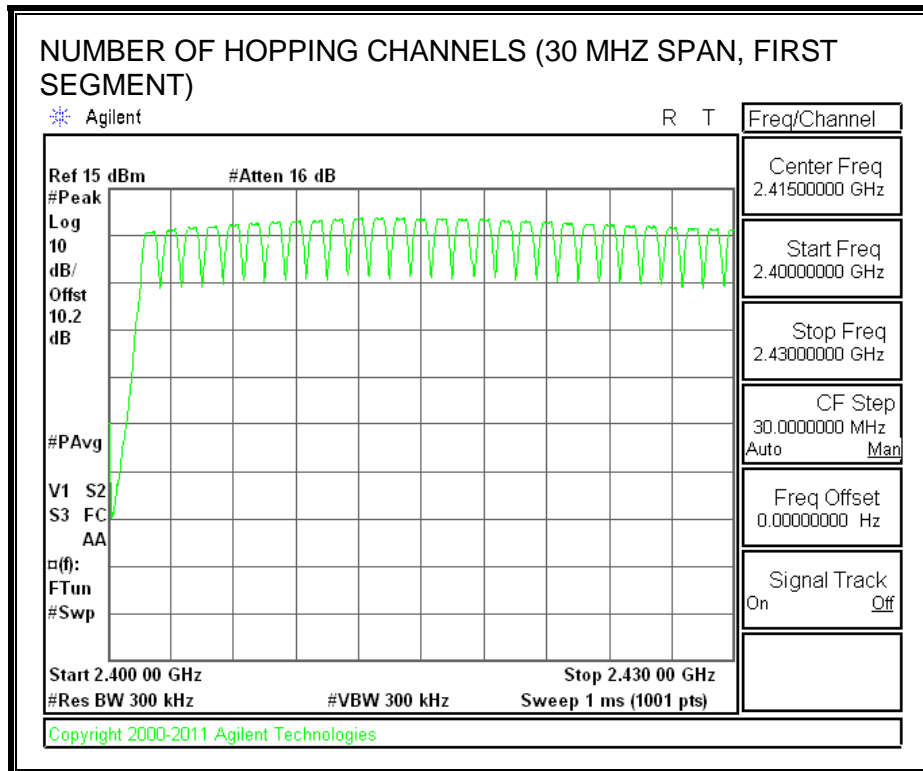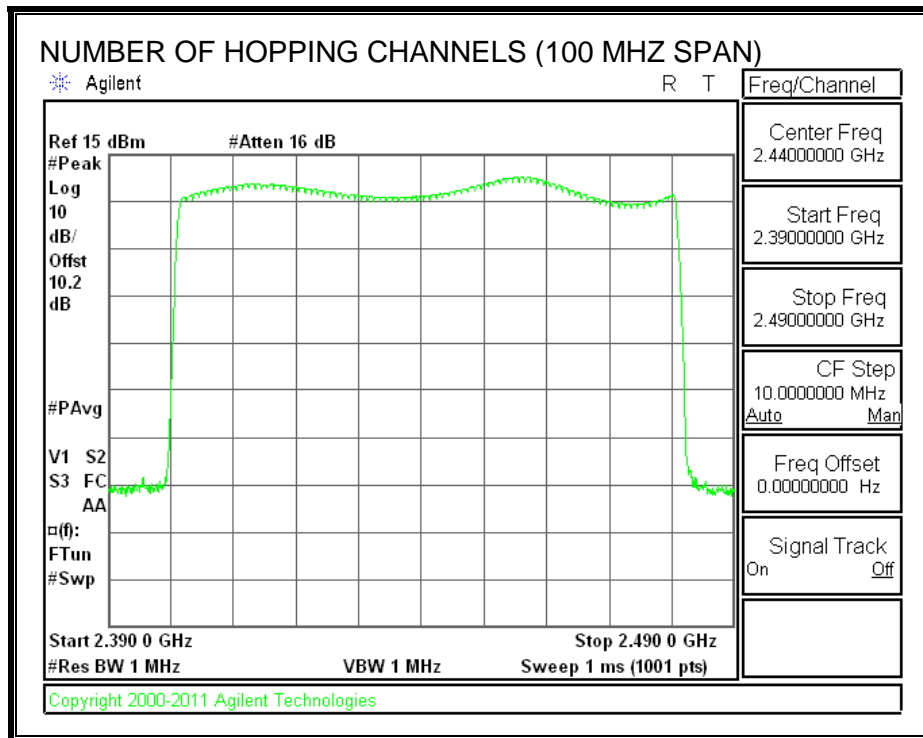

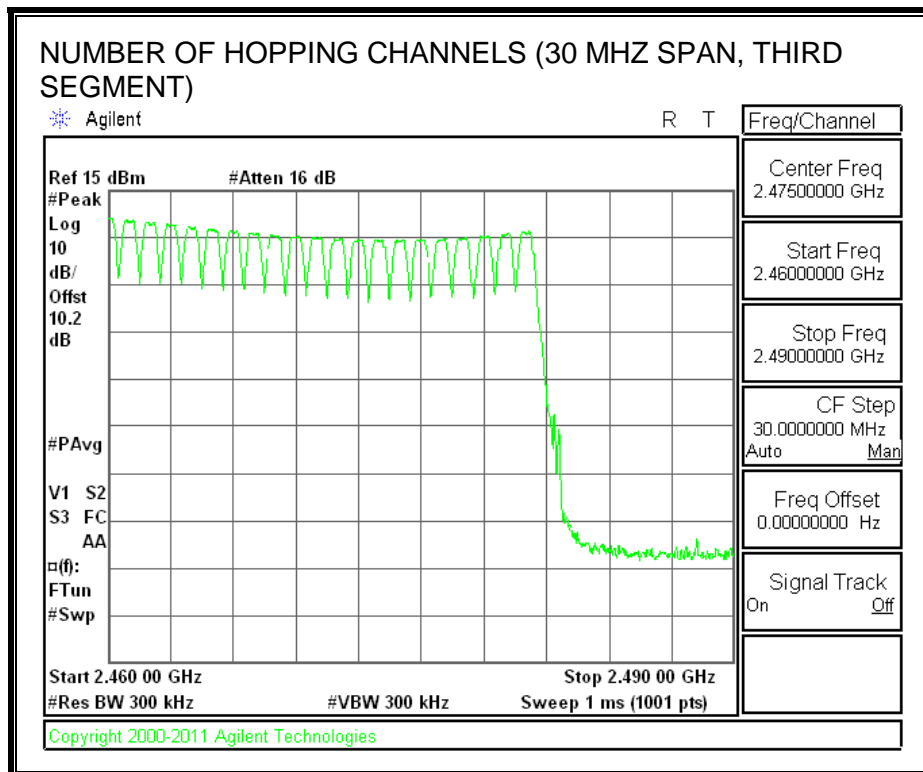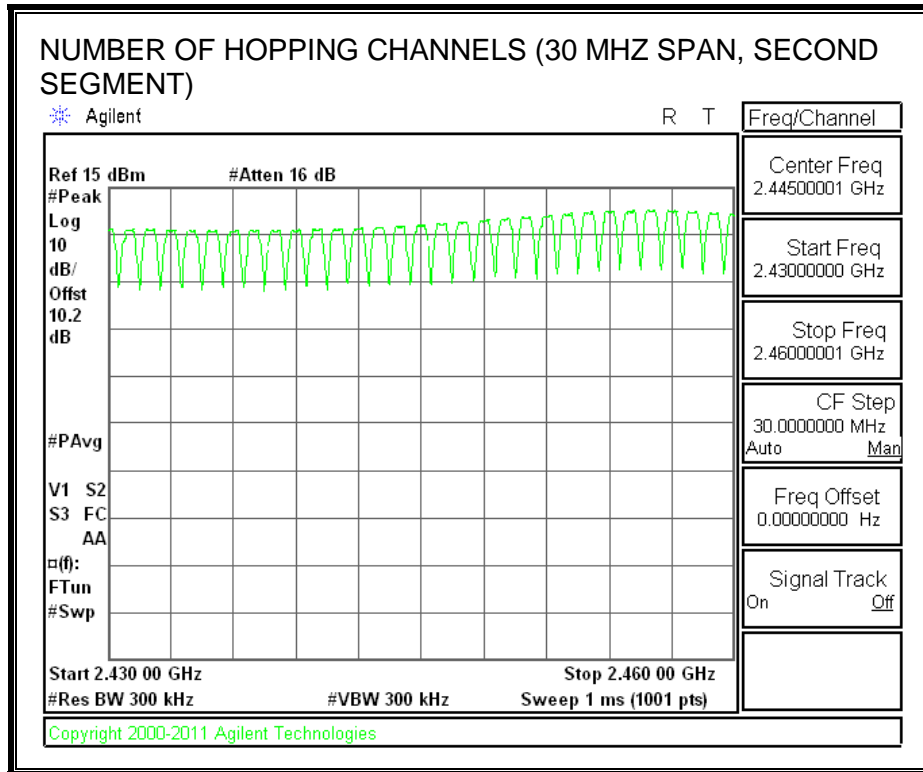

## 8.4. AVERAGE TIME OF OCCUPANCY

### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.


The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{ pulse width}$ .

For AFH mode, the average time of occupancy in the specified 8 second period (20 channels \* 0.4 seconds) is equal to  $10 * (\# \text{ of pulses in } 0.8 \text{ s}) * \text{ pulse width}$ .


### RESULTS

DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
<b>GFSK Normal Mode</b>					
DH1	0.382	32	0.122	0.4	-0.278
DH3	1.635	15	0.245	0.4	-0.155
DH5	2.885	8	0.231	0.4	-0.169
<b>GFSK AFH Mode</b>					
DH Packet	Pulse Width (msec)	Number of Pulses in 0.8 seconds	Average Time of Occupancy (sec)	Limit (sec)	Margin (sec)
DH1	0.382	8	0.031	0.4	-0.369
DH3	1.635	4	0.065	0.4	-0.335
DH5	2.885	2	0.058	0.4	-0.342


**PULSE WIDTH - DH1**

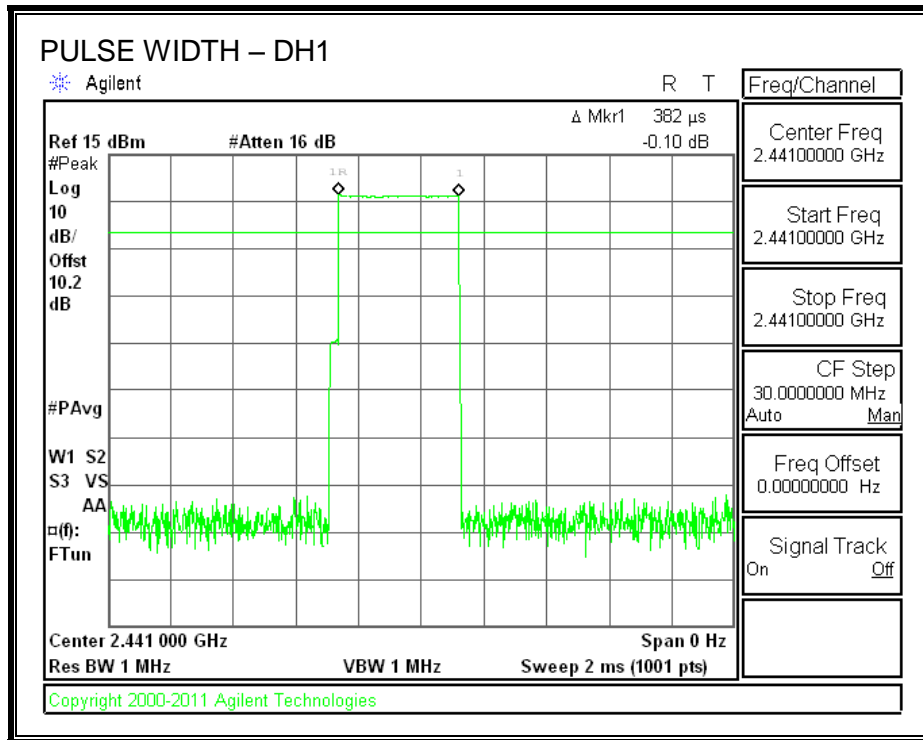


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD - DH1**

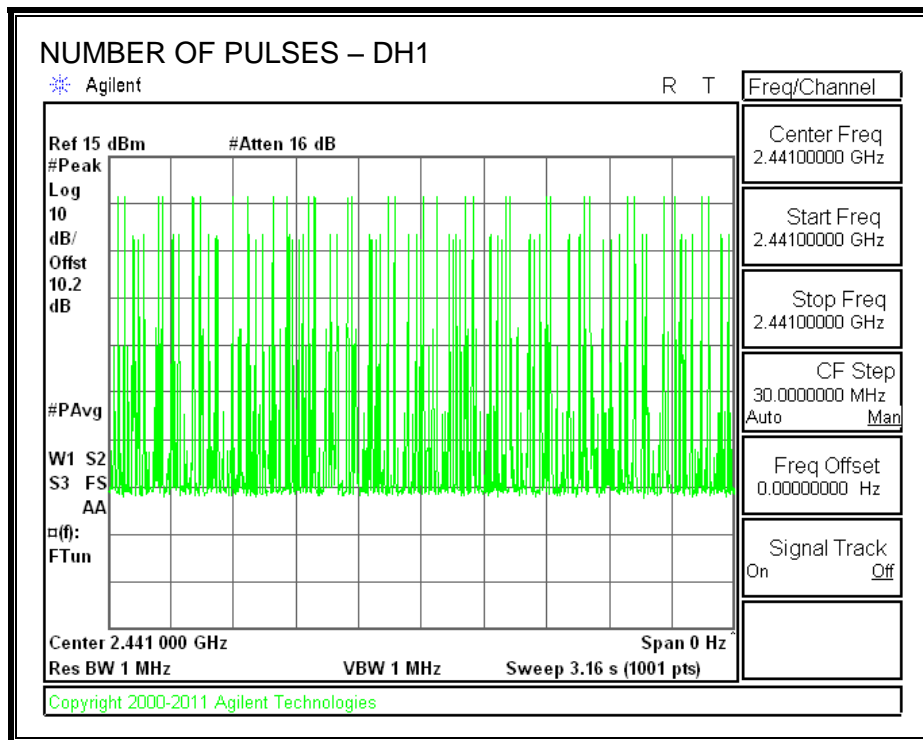


**PULSE WIDTH – DH3**

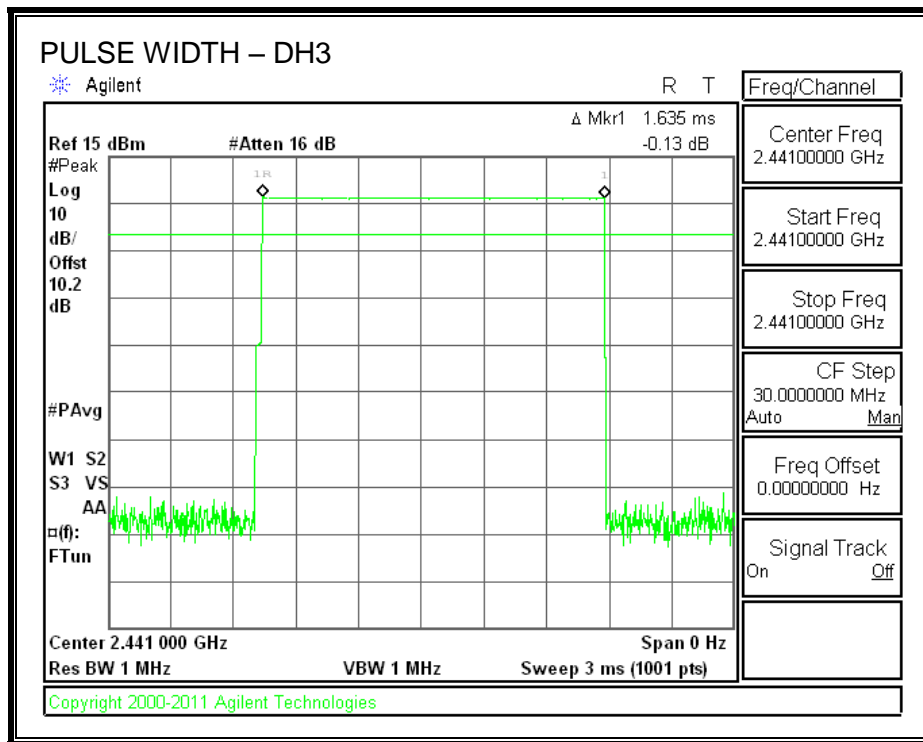


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH3**

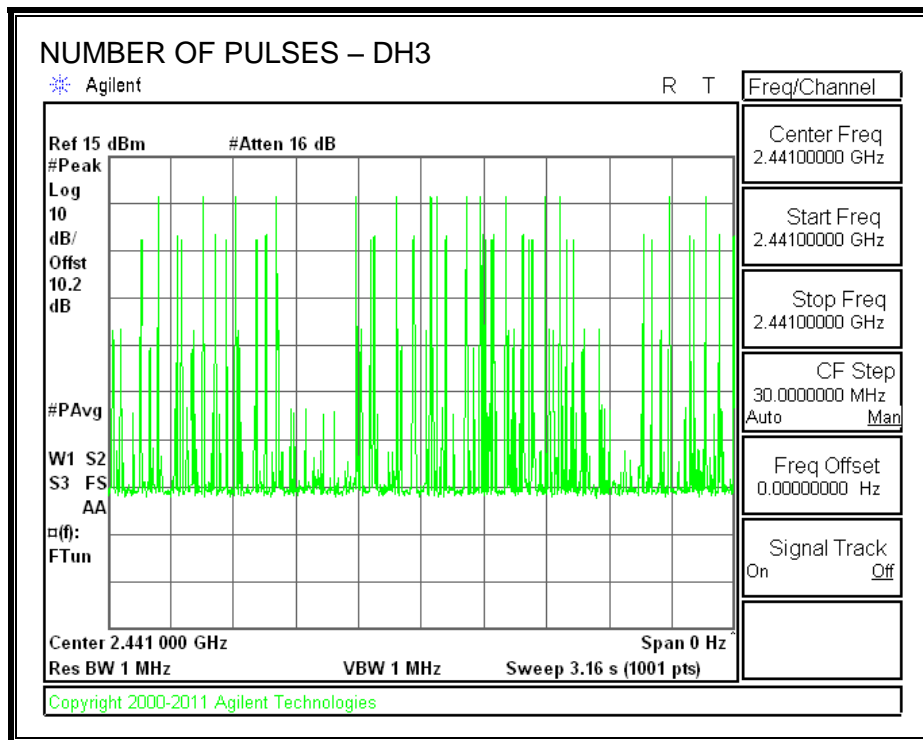

**PULSE WIDTH – DH5**

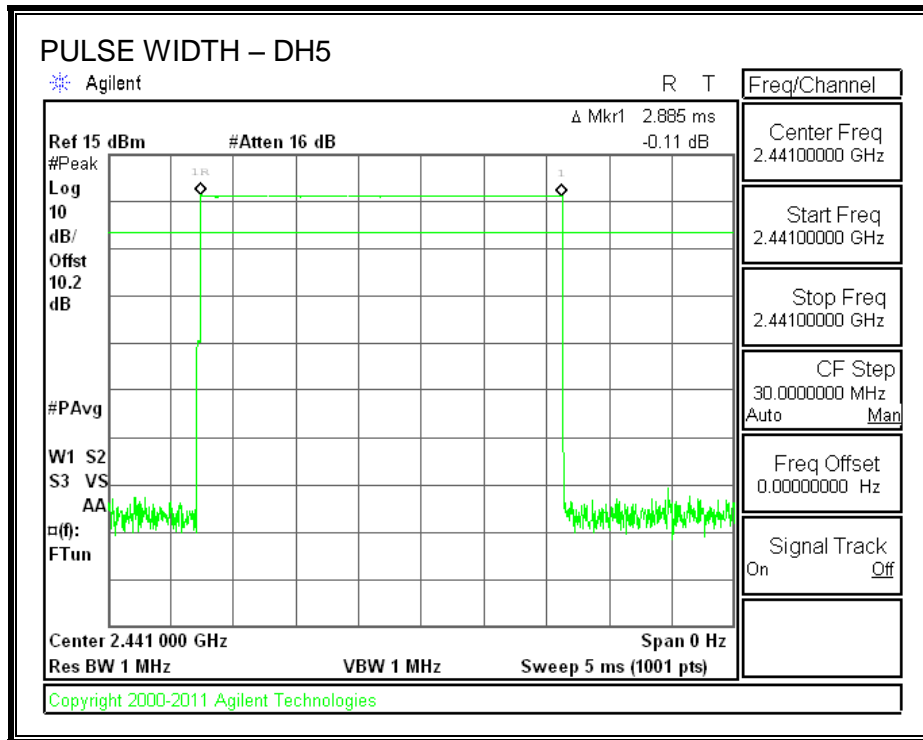

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD – DH5**

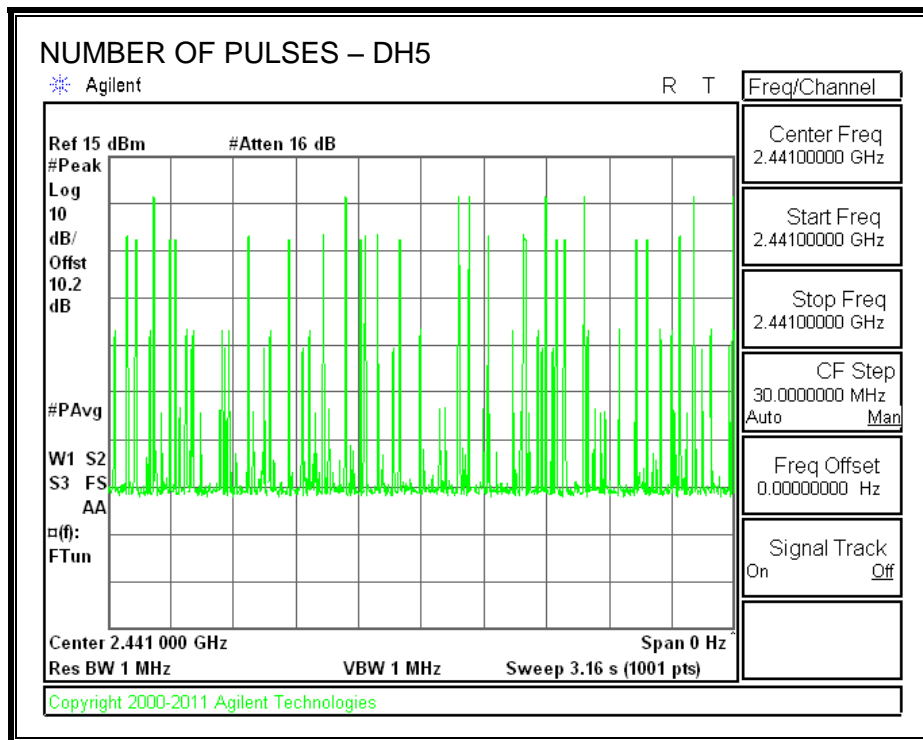

## 8.5. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 21 dBm.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS



#### 8.5.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	5.96	21	-15.04
Middle	2441	6.34	21	-14.66
High	2480	6.51	21	-14.49
Worst		6.51		-14.49

#### 8.5.2. ENHANCED DATA RATE 8PSK MODULATION



Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	6.11	21	-14.89
Middle	2441	6.55	21	-14.45
High	2480	6.58	21	-14.42
Worst		6.58		-14.42


**GFSK OUTPUT POWER**

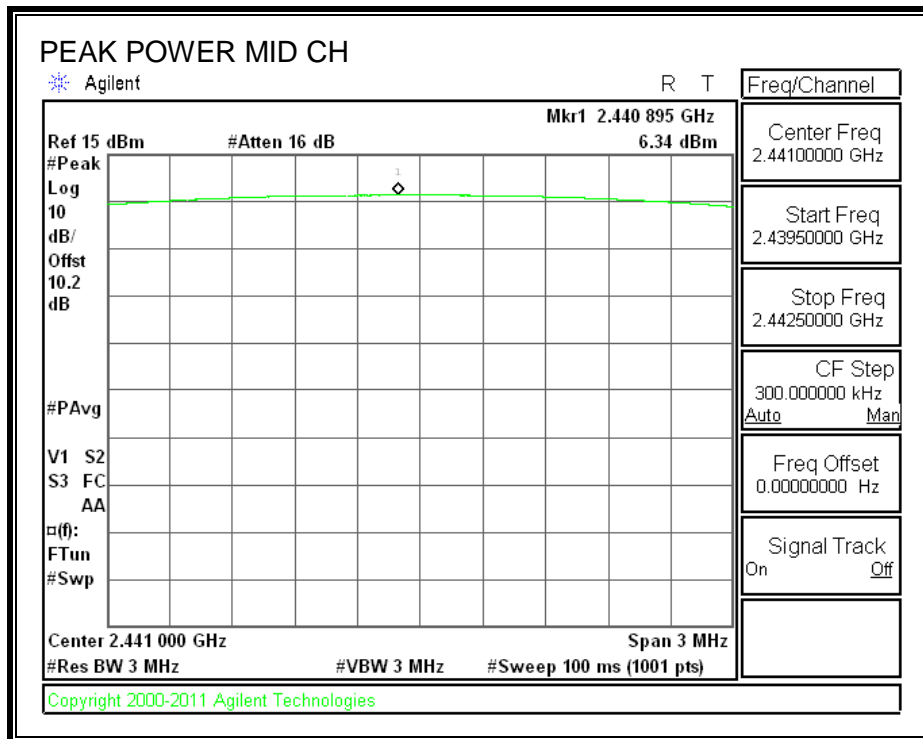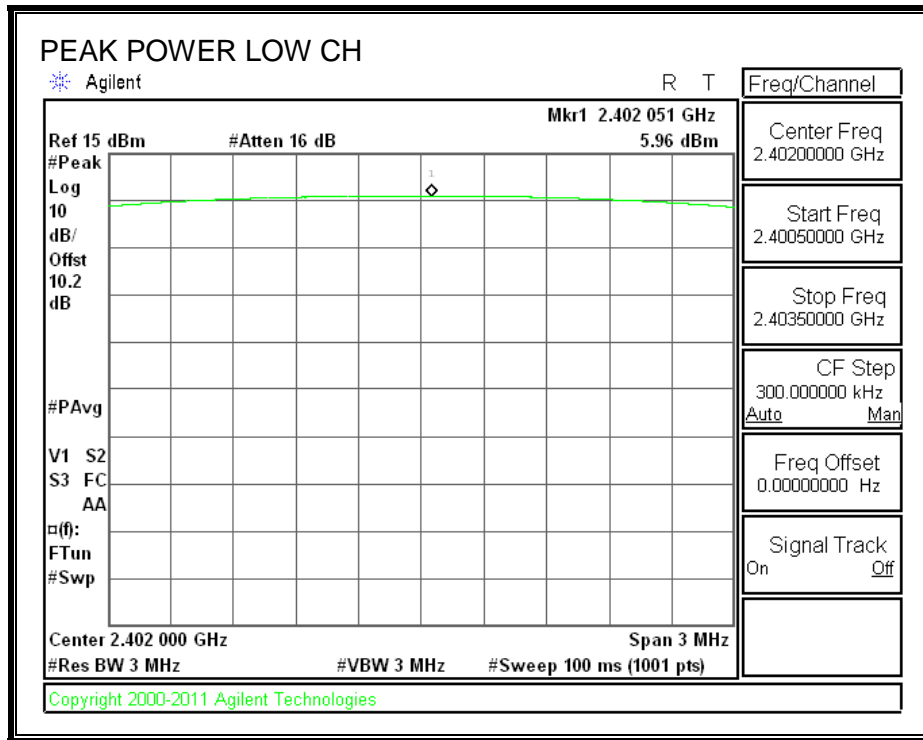



**8PSK OUTPUT POWER**

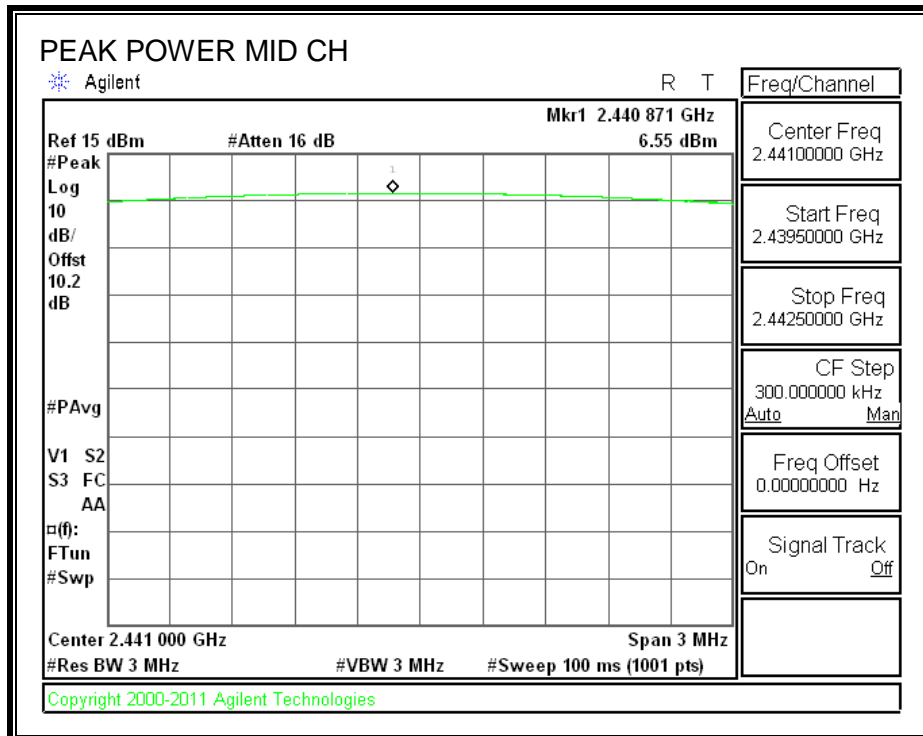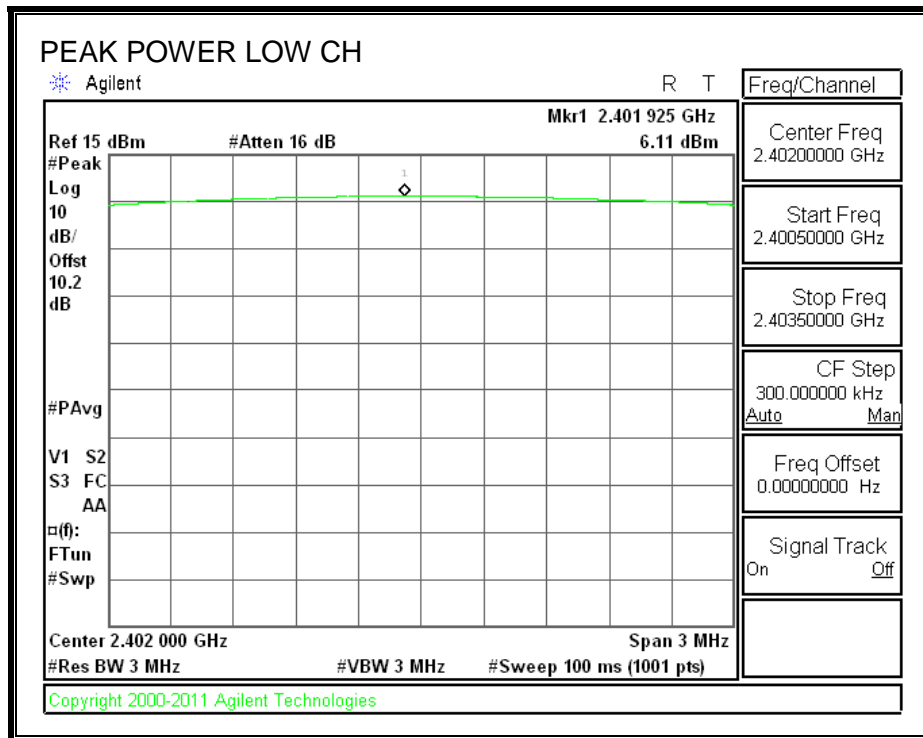

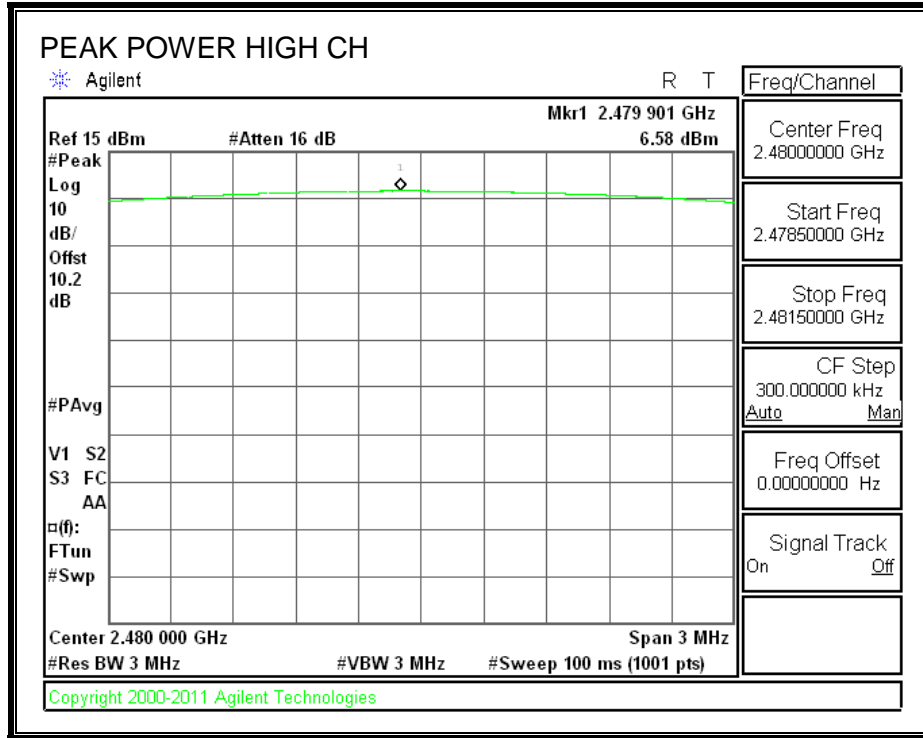

## 8.6. AVERAGE POWER

### LIMIT

None; for reporting purposes only.

### TEST PROCEDURE

DA 00-705: The transmitter output is connected to a power meter.

### RESULTS

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

#### 8.6.1. BASIC DATA RATE GFSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	4.50
Middle	2441	6.10
High	2480	6.20
Worst		6.20

#### 8.6.2. DATA RATE PI/4-DQPSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	3.90
Middle	2441	5.20
High	2480	4.80
Worst		5.20

### 8.6.3. ENHANCED DATA RATE 8PSK MODULATION

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	3.90
Middle	2441	5.20
High	2480	4.80
Worst		5.20

## 8.7. CONDUCTED SPURIOUS EMISSIONS

### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



### RESULTS

### 8.7.1. BASIC DATA RATE GFSK MODULATION



#### SPURIOUS EMISSIONS, LOW CHANNEL

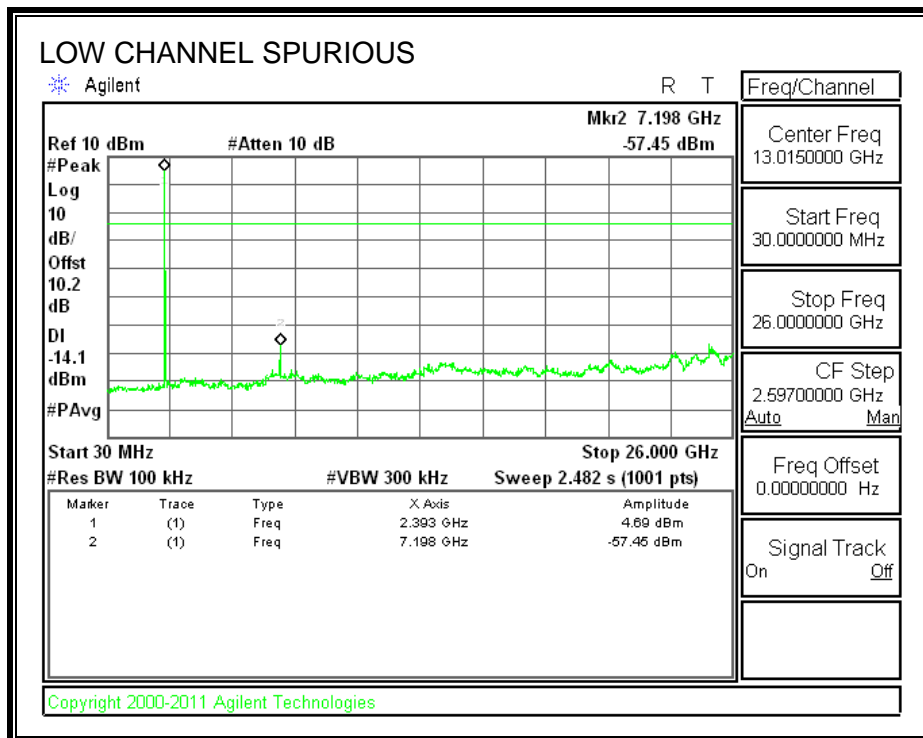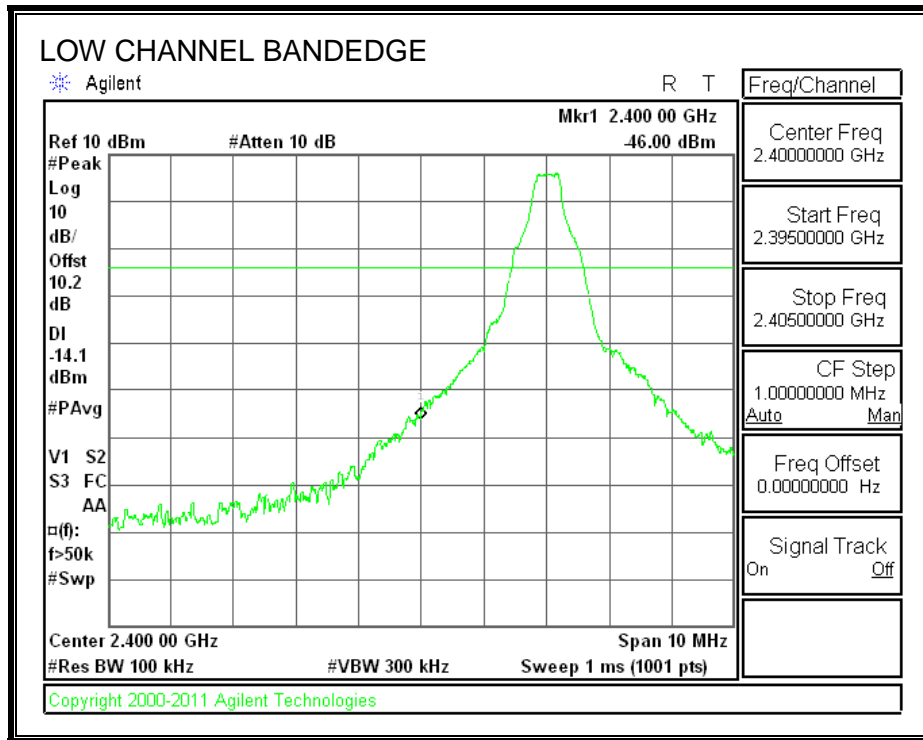



**SPURIOUS EMISSIONS, MID CHANNEL**

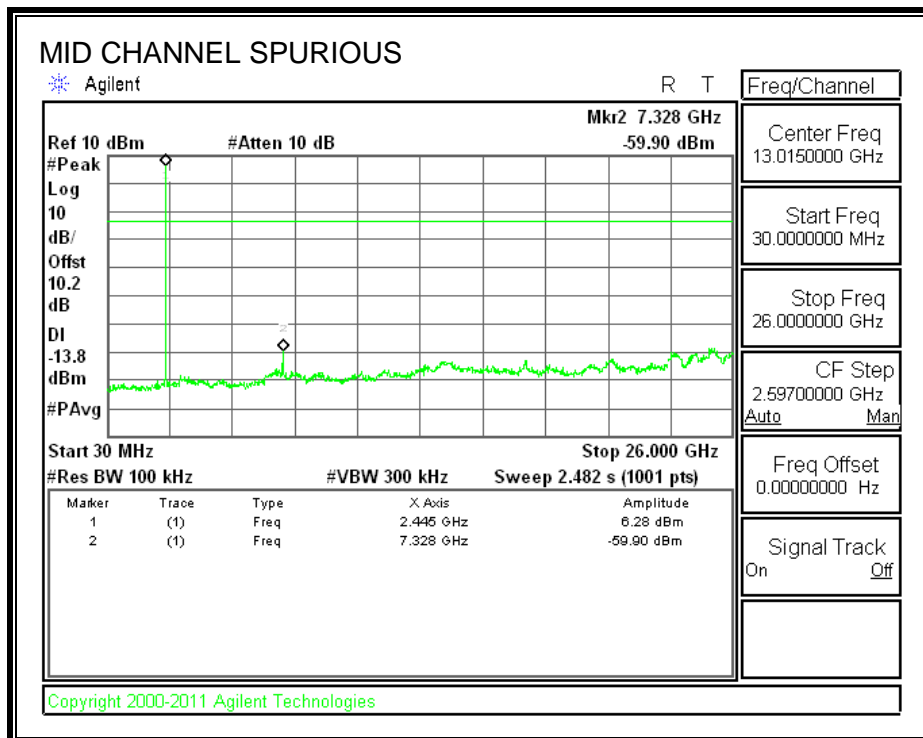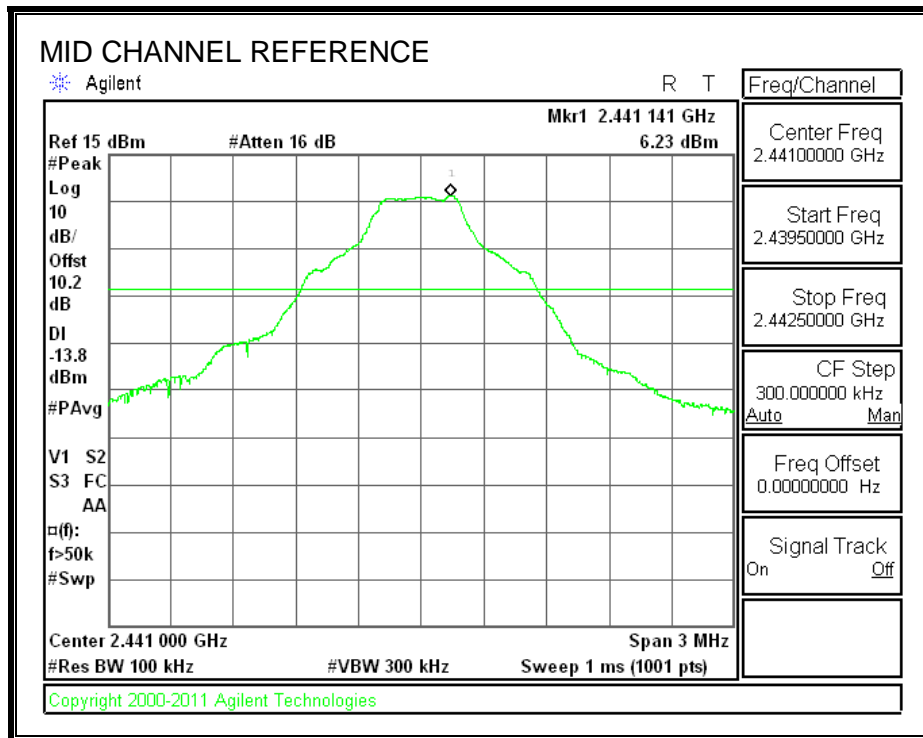

**SPURIOUS EMISSIONS, HIGH CHANNEL**

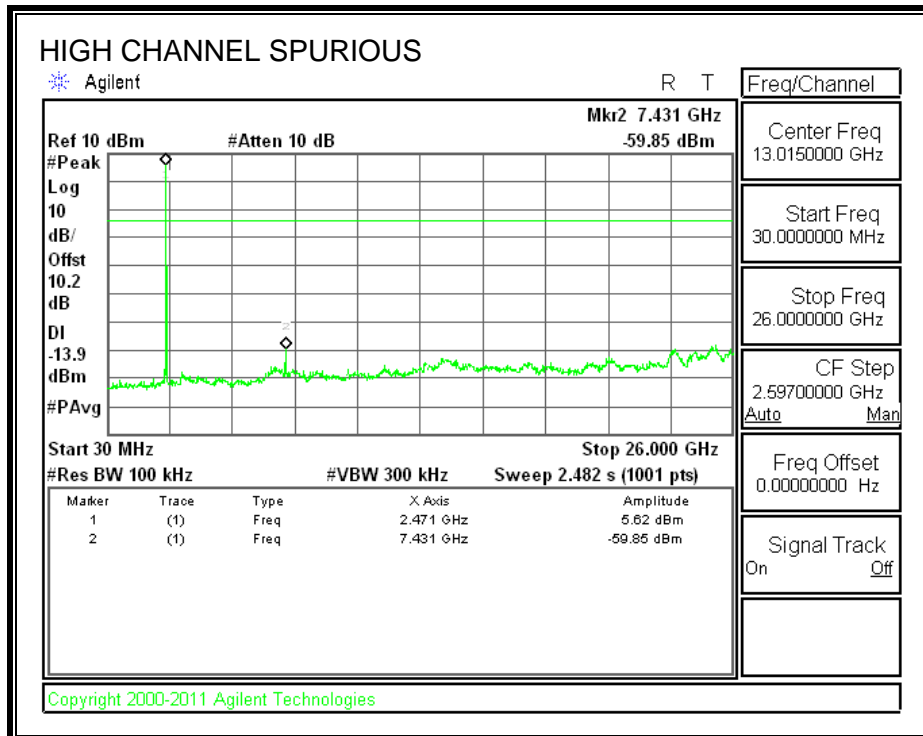
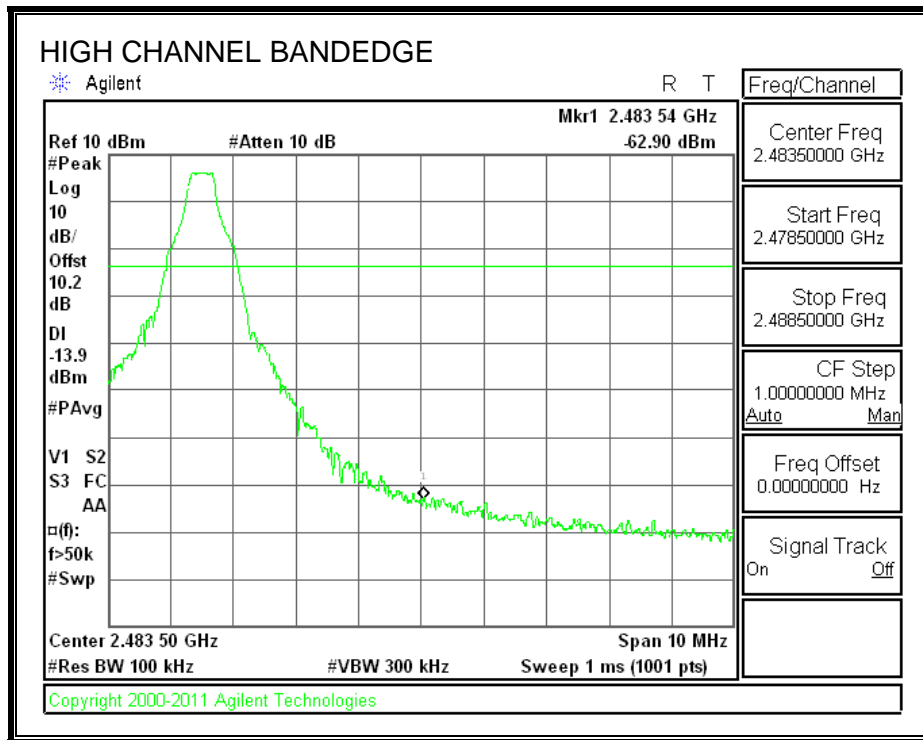


**SPURIOUS BANDEDGE EMISSIONS WITH GFSK HOPPING ON**

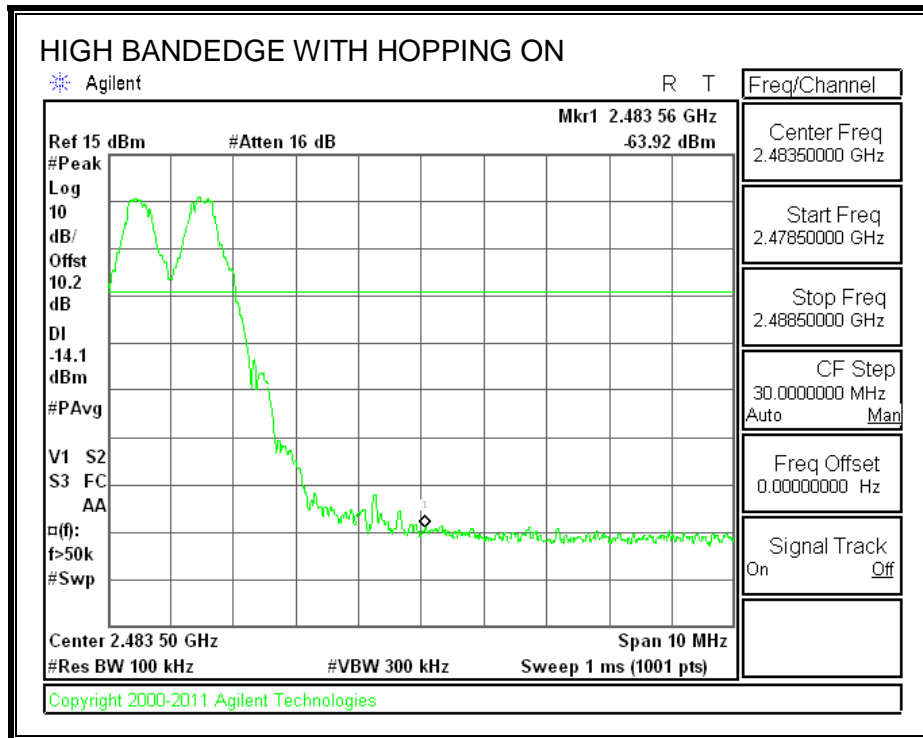
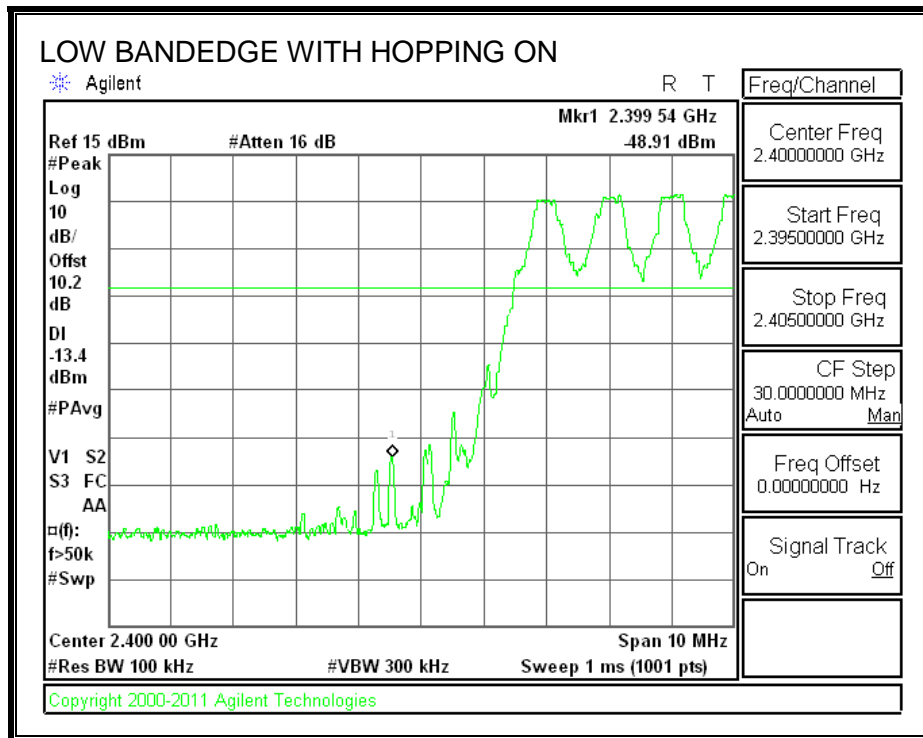


### 8.7.1. ENHANCED DATA RATE 8PSK MODULATION



#### SPURIOUS EMISSIONS, LOW CHANNEL

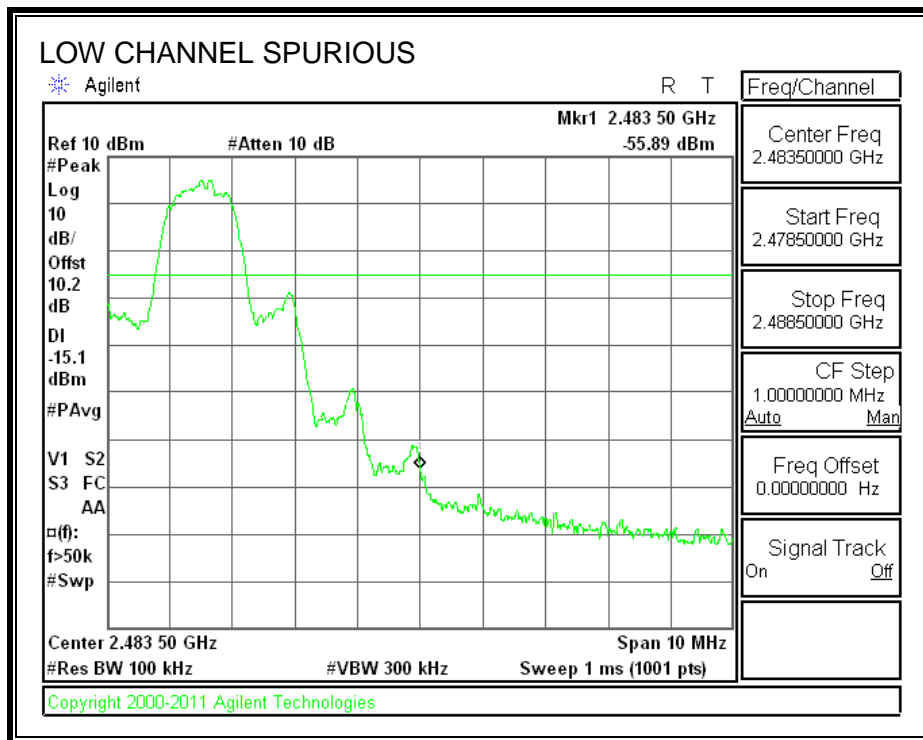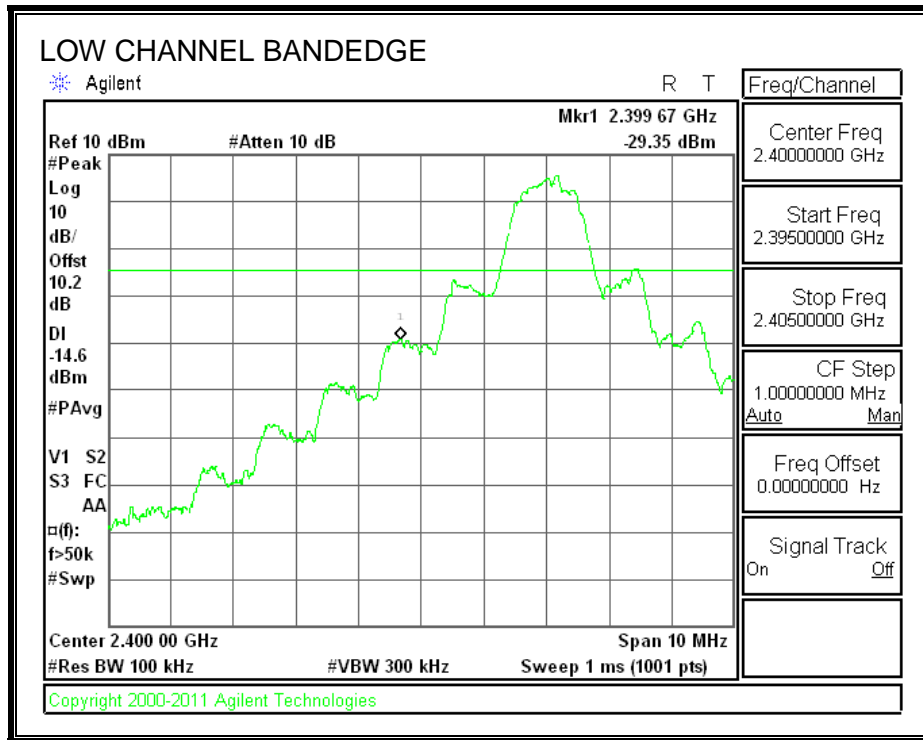



**SPURIOUS EMISSIONS, MID CHANNEL**

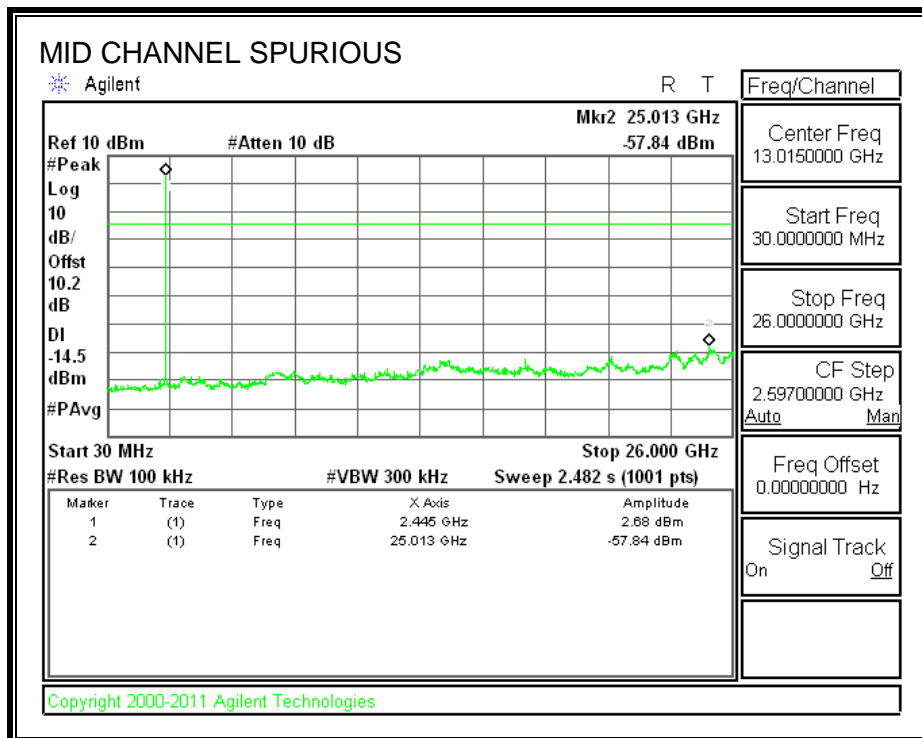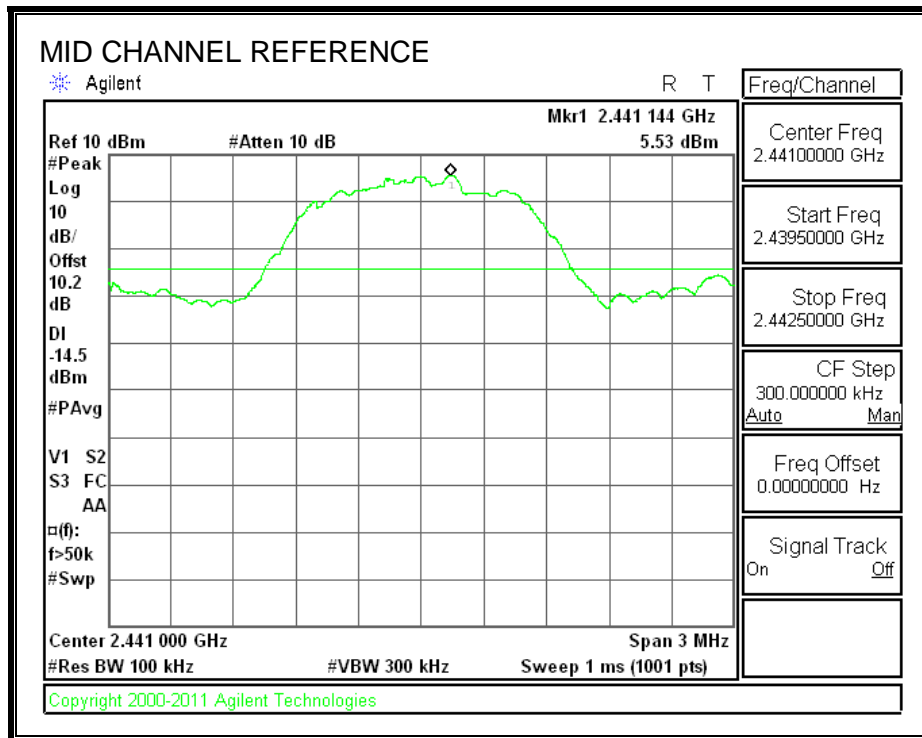

**SPURIOUS EMISSIONS, HIGH CHANNEL**

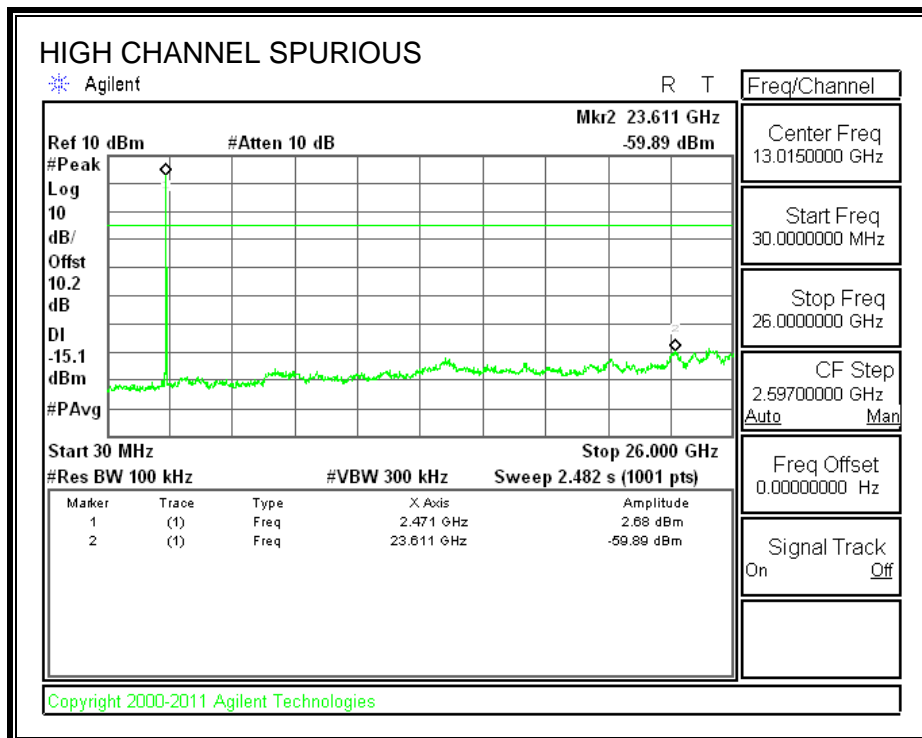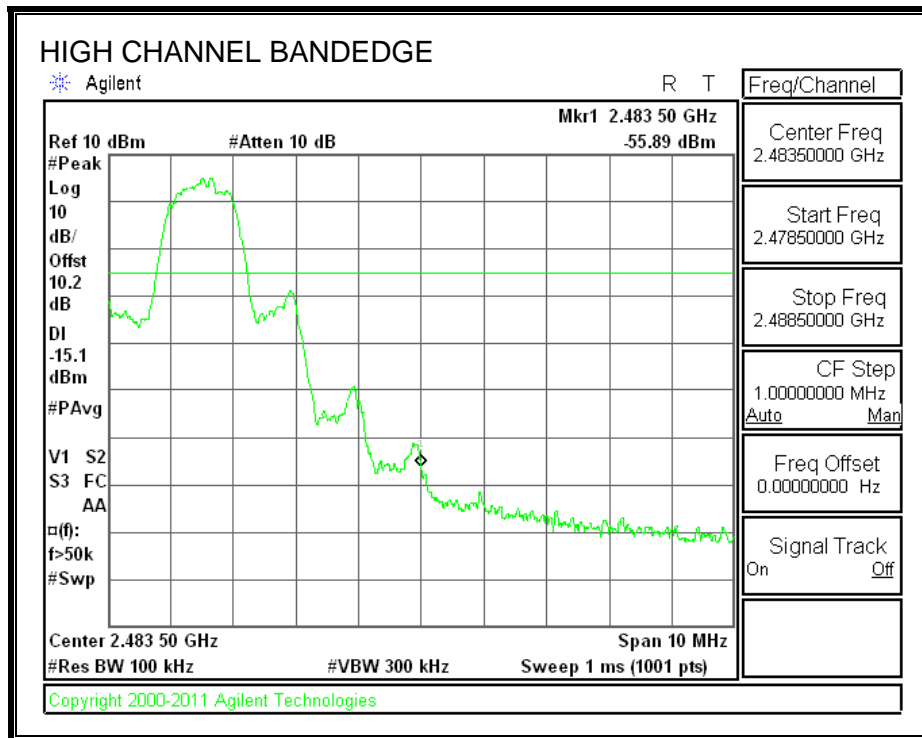

**SPURIOUS BANDEDGE EMISSIONS WITH 8PSK HOPPING ON**

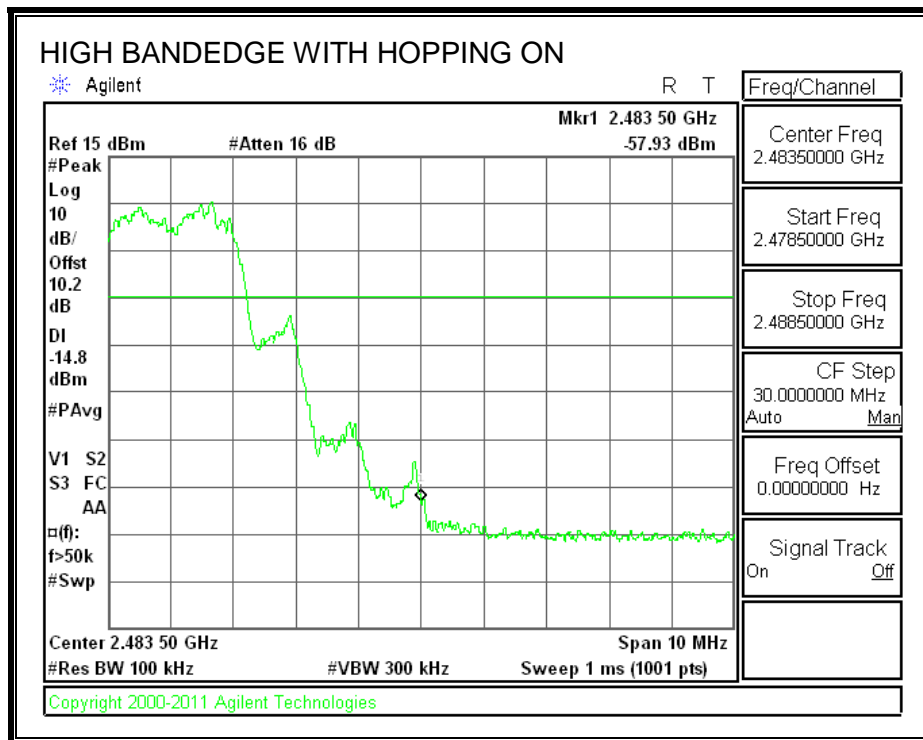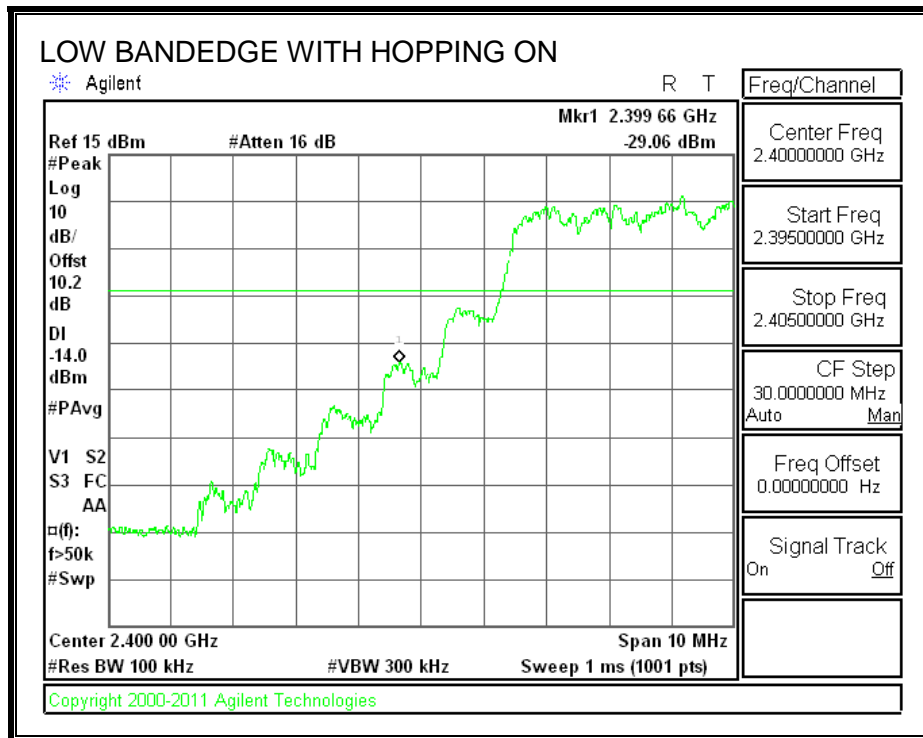

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement. GFSK =  $1/T = 1 / 0.002885S = 360\text{Hz}$ .


The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 9.2. TRANSMITTER ABOVE 1 GHz

### 9.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

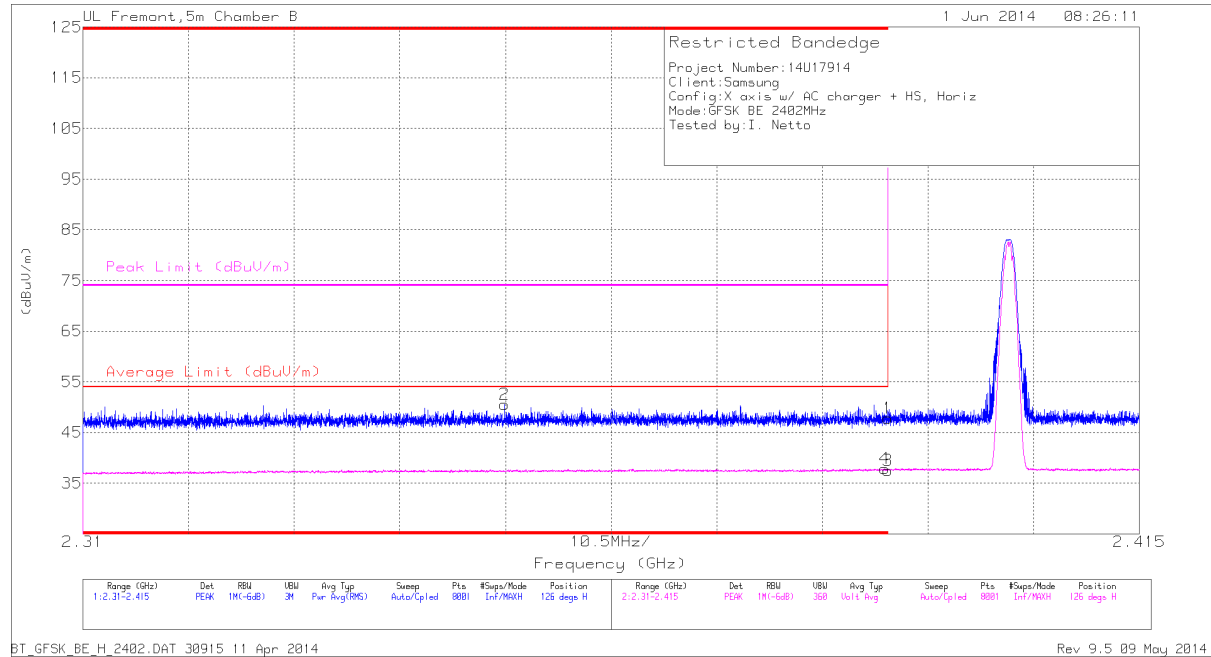


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.47	PK	32.1	-22.8	47.77	-	-	74	-26.23	126	399	H
2	* 2.352	41.57	PK	31.9	-22.9	50.57	-	-	74	-23.43	126	399	H
3	* 2.39	28.19	VB1T	32.1	-22.8	37.49	54	-16.51	-	-	126	399	H
4	* 2.39	28.56	VB1T	32.1	-22.8	37.86	54	-16.14	-	-	126	399	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

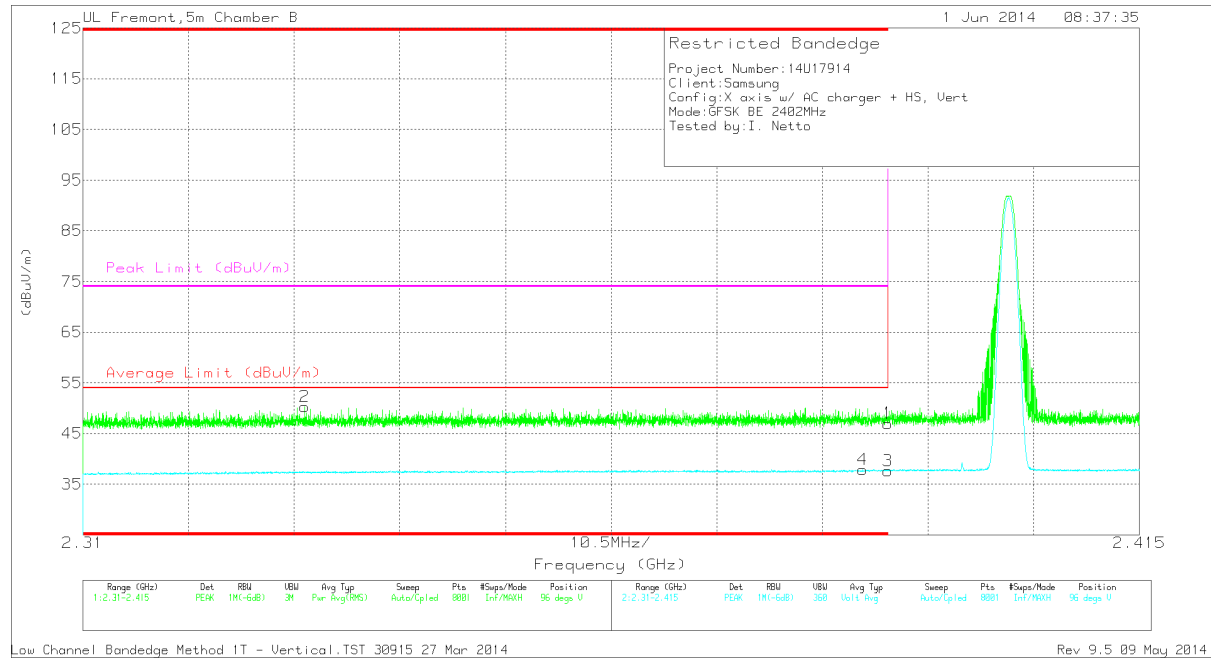


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	37.7	PK	32.1	-22.8	47	-	-	74	-27	96	360	V
2	* 2.332	41.39	PK	31.8	-22.9	50.29	-	-	74	-23.71	96	360	V
3	* 2.39	28.35	VB1T	32.1	-22.8	37.65	54	-16.35	-	-	96	360	V
4	* 2.388	28.59	VB1T	32.1	-22.8	37.89	54	-16.11	-	-	96	360	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

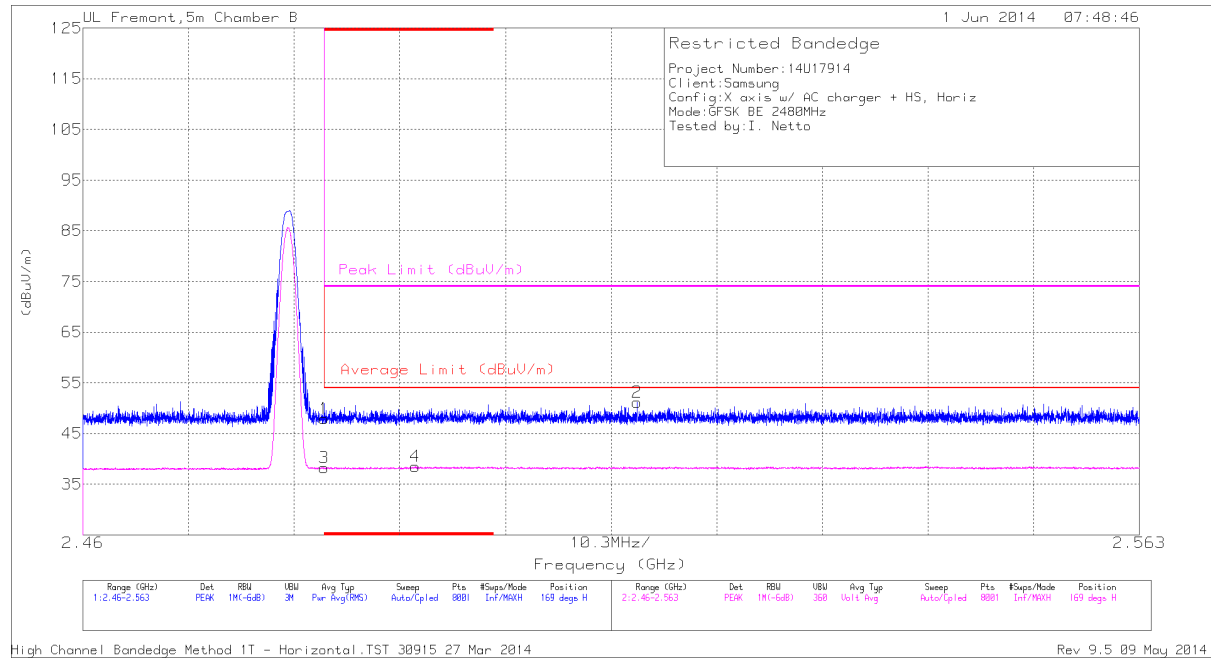


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.23	PK	32.4	-22.7	47.93	-	-	74	-26.07	169	131	H
3	* 2.484	28.52	VB1T	32.4	-22.7	38.22	54	-15.78	-	-	169	131	H
4	* 2.492	28.78	VB1T	32.4	-22.7	38.48	54	-15.52	-	-	169	131	H
2	2.514	41.4	PK	32.5	-22.7	51.2	-	-	74	-22.8	169	131	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

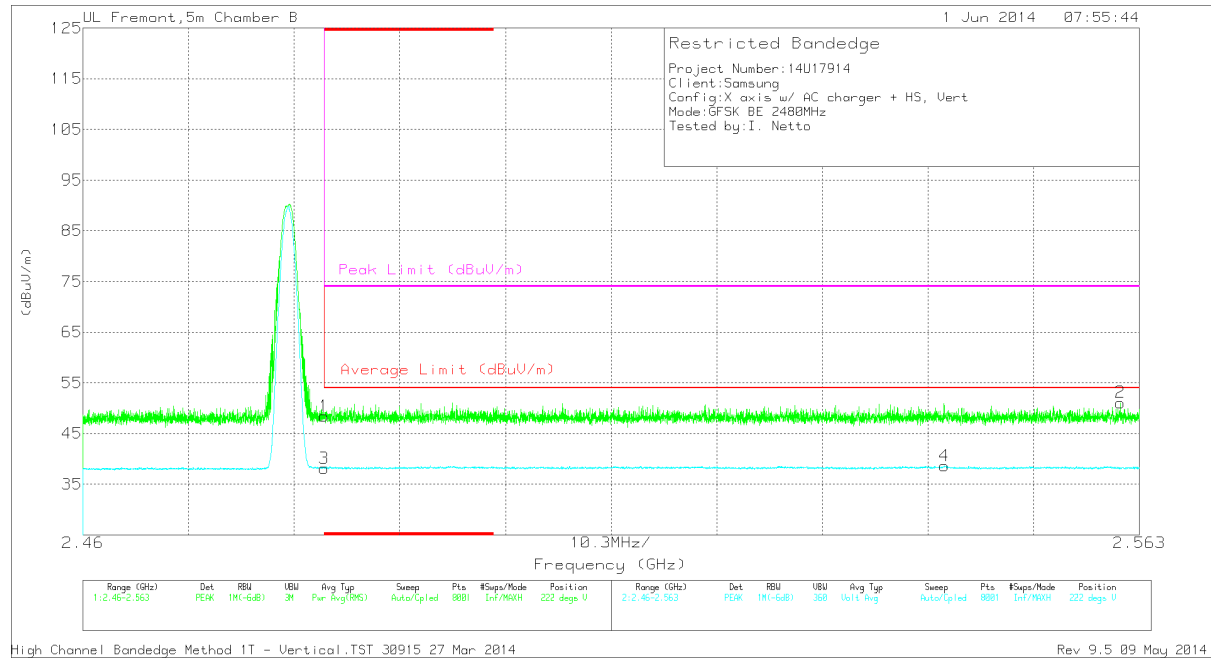

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.72	PK	32.4	-22.7	48.42	-	-	74	-25.58	222	173	V
3	* 2.484	28.37	VB1T	32.4	-22.7	38.07	54	-15.93	-	-	222	173	V
4	2.544	28.73	VB1T	32.5	-22.6	38.63	54	-15.37	-	-	222	173	V
2	2.561	41.3	PK	32.5	-22.7	51.1	-	-	74	-22.9	222	173	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL  
 HORIZONTAL**

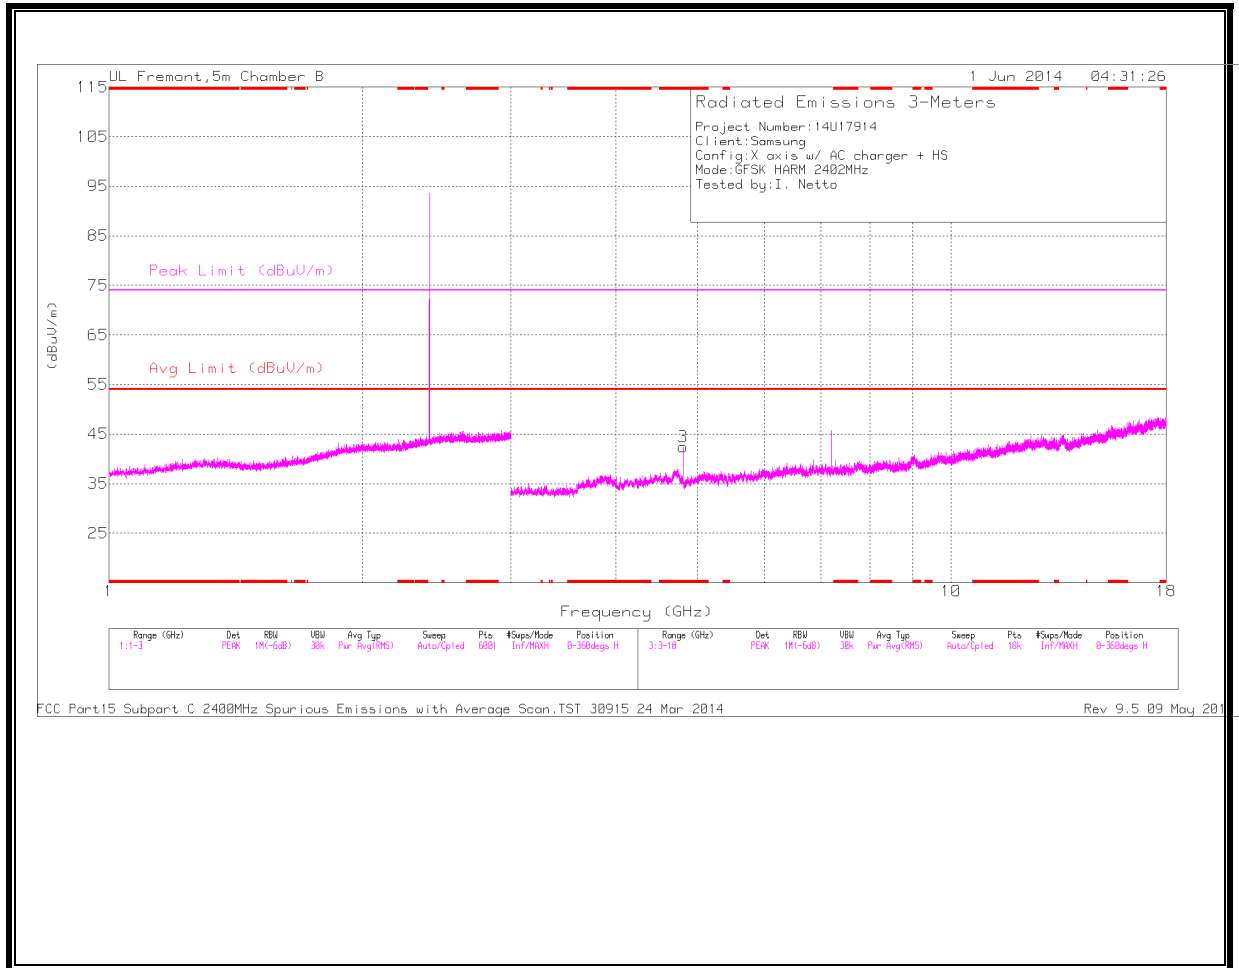

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

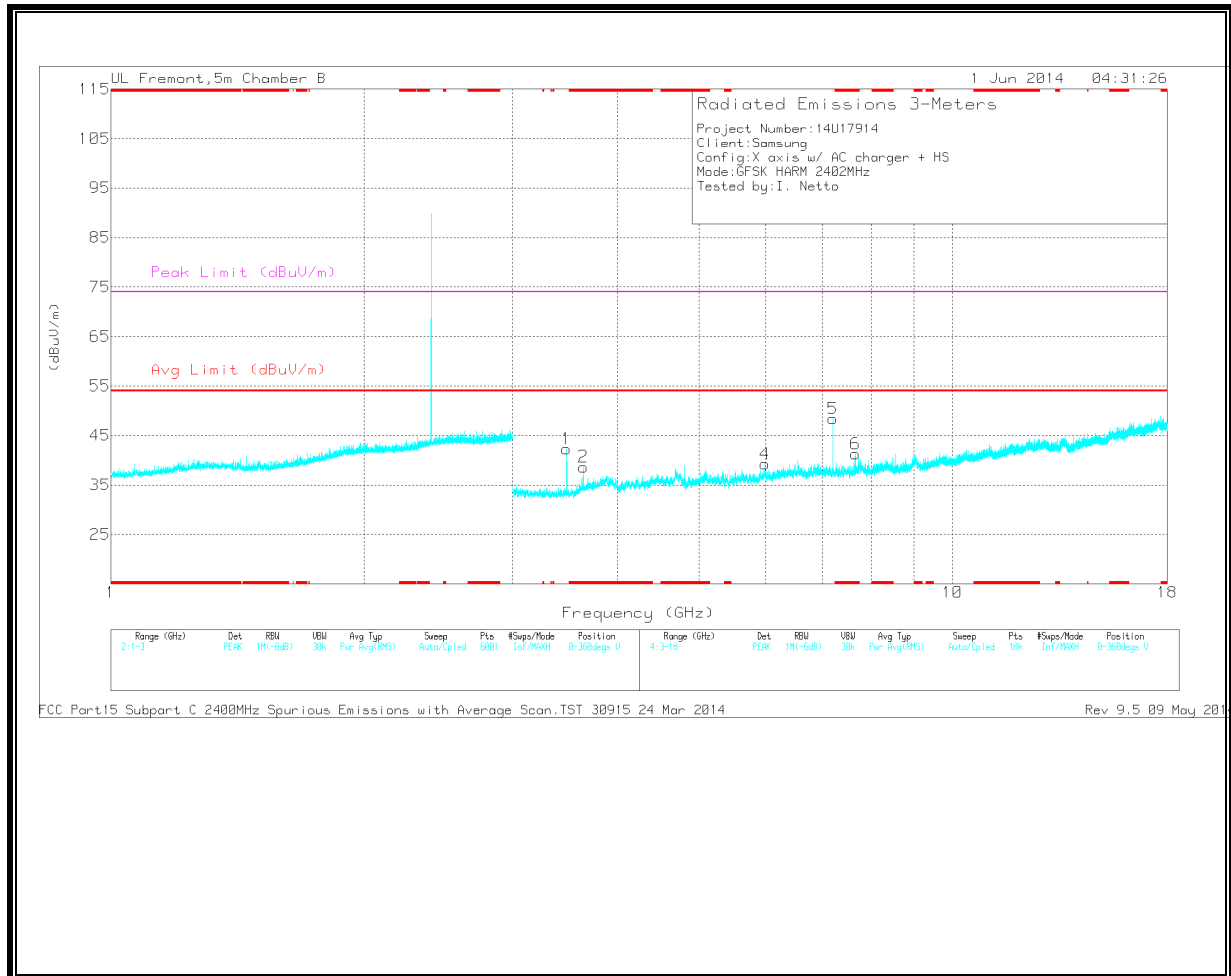

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
3	* 4.804	37.68	PK	34.2	-29.4	42.48	-	-	74	-31.52	0-360	201	H
2	* 3.641	36.58	PK	33.2	-31.1	38.68	-	-	74	-35.32	0-360	201	V
6	* 7.667	32.55	PK	35.7	-27	41.25	-	-	74	-32.75	0-360	101	V
1	3.48	40.55	PK	32.8	-31.1	42.25	-	-	-	-	0-360	201	V
4	5.985	32.6	PK	35.2	-28.5	39.3	-	-	-	-	0-360	201	V
5	7.206	39.84	PK	35.5	-27	48.34	-	-	-	-	0-360	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 4.804	43.33	PK3	34.2	-29.4	48.13	-	-	74	-25.87	89	249	H
* 4.804	36.76	VB1T	34.2	-29.4	41.56	54	-12.44	-	-	89	249	H
* 3.64	41.65	PK3	33.2	-31.1	43.75	-	-	74	-30.25	183	202	V
* 7.668	38.16	PK3	35.7	-27	46.86	-	-	74	-27.14	183	102	V
3.48	40.91	PK3	32.8	-31.1	42.61	-	-	-	-	169	143	V
3.48	37.26	VB1T	32.8	-31.1	38.96	-	-	-	-	169	143	V
5.984	39.75	PK3	35.2	-28.5	46.45	-	-	-	-	183	202	V
7.205	43.54	PK3	35.5	-27	52.04	-	-	-	-	183	105	V
7.206	36.9	VB1T	35.5	-27	45.4	-	-	-	-	183	105	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL  
 HORIZONTAL

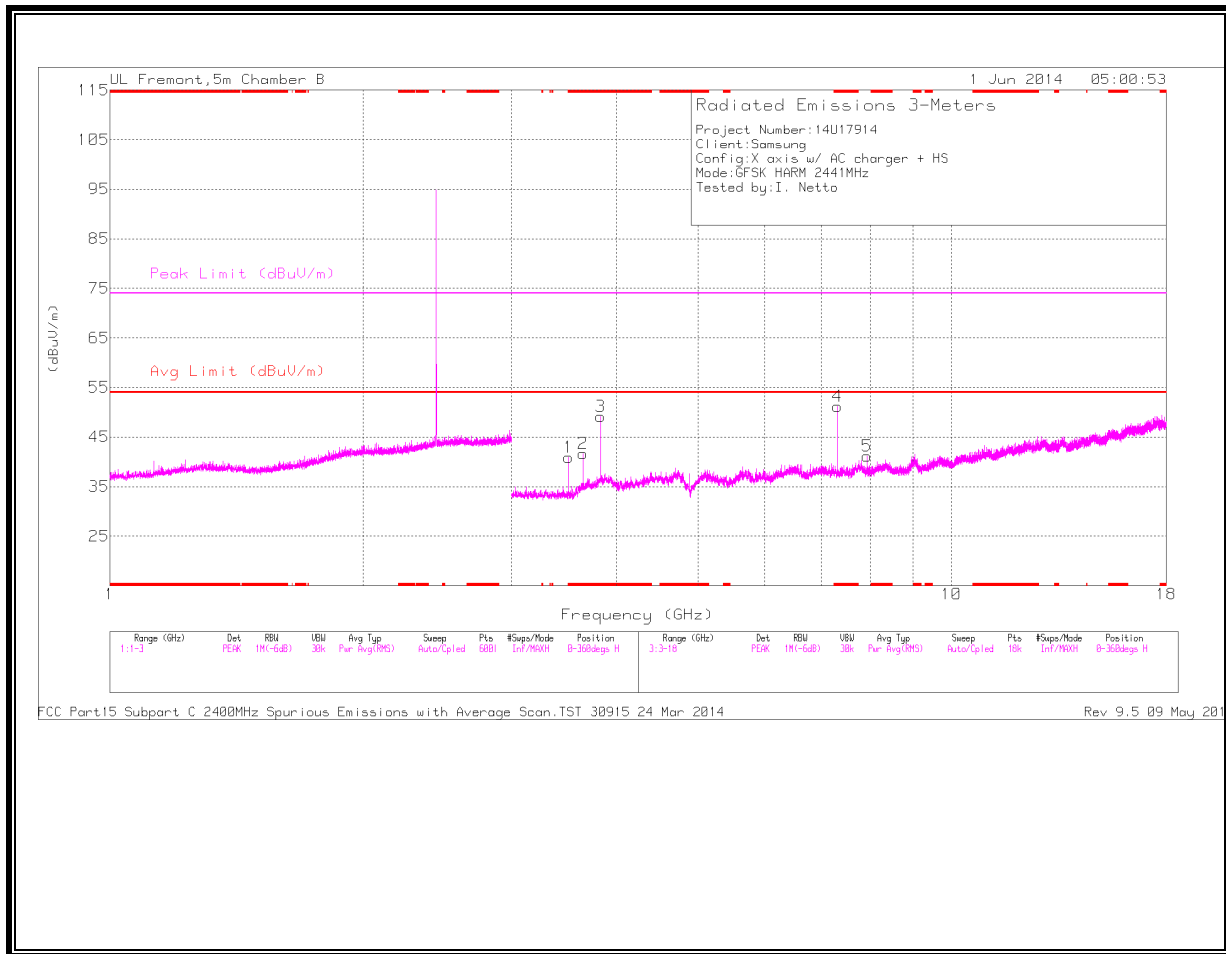

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

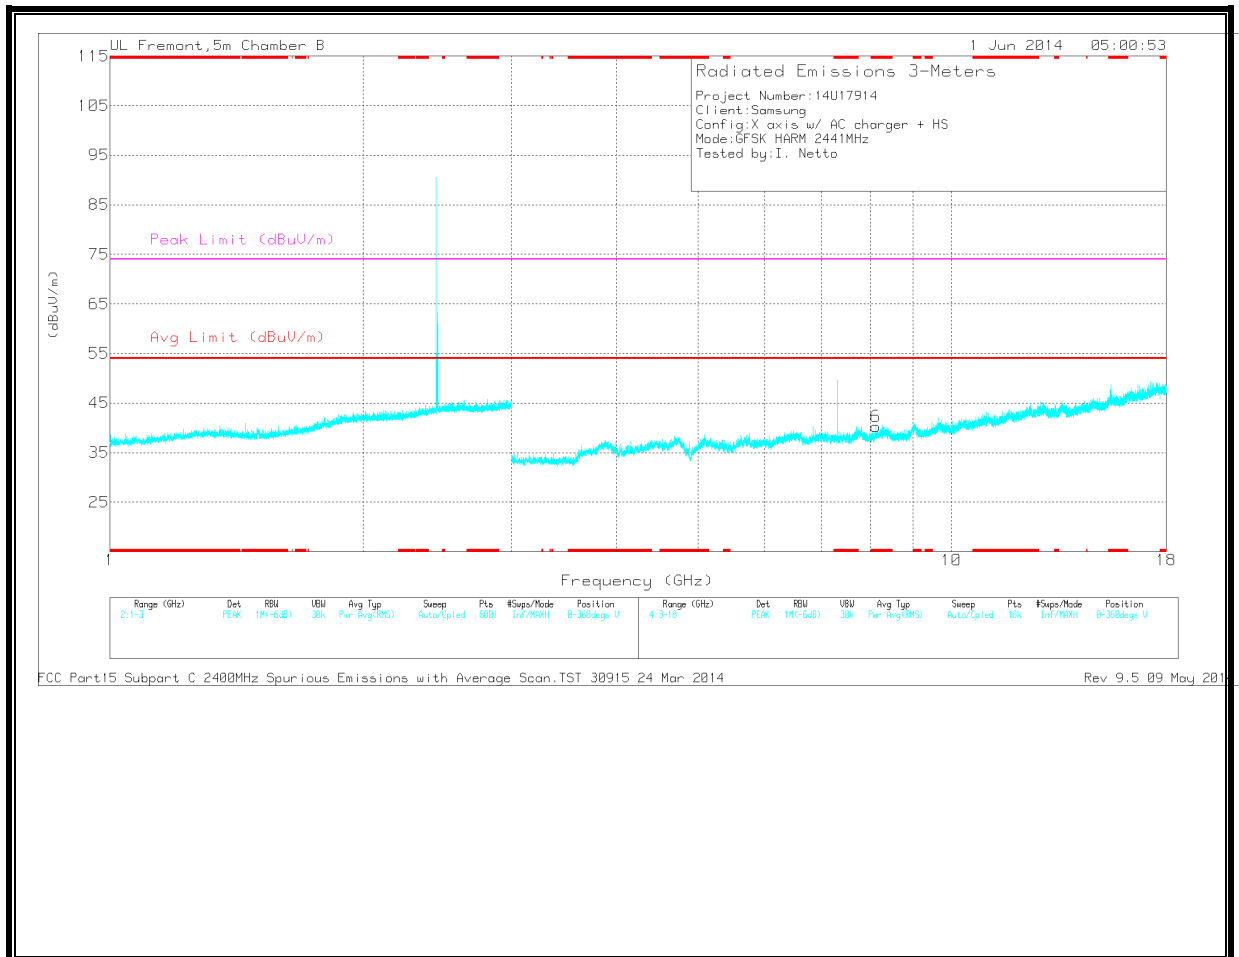

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.507	39.33	PK	32.8	-31.2	40.93	-	-	74	-33.07	0-360	101	H
2	* 3.647	39.58	PK	33.2	-31.1	41.68	-	-	74	-32.32	0-360	101	H
3	* 3.83	46	PK	33.7	-30.5	49.2	-	-	74	-24.8	0-360	101	H
4	* 7.323	43.68	PK	35.6	-28.1	51.18	-	-	74	-22.82	0-360	201	H
6	* 8.126	30.44	PK	35.7	-25.9	40.24	-	-	74	-33.76	0-360	100	V
5	7.936	32.38	PK	35.7	-26.9	41.18	-	-	-	-	0-360	101	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.508	40.7	PK3	32.8	-31.2	42.3	-	-	74	-31.7	199	331	H
* 3.508	28.18	VB1T	32.8	-31.2	29.78	54	-24.22	-	-	199	331	H
* 3.647	41.55	PK3	33.2	-31.1	43.65	-	-	74	-30.35	97	251	H
* 3.647	29.15	VB1T	33.2	-31.1	31.25	54	-22.75	-	-	97	251	H
* 3.831	42.38	PK3	33.7	-30.5	45.58	-	-	74	-28.42	108	285	H
* 3.83	29.28	VB1T	33.7	-30.5	32.48	54	-21.52	-	-	108	285	H
* 7.323	46.22	PK3	35.6	-28.1	53.72	-	-	74	-20.28	179	221	H
* 7.323	40.71	VB1T	35.6	-28.1	48.21	54	-5.79	-	-	179	221	H
* 8.128	37.05	PK3	35.7	-25.9	46.85	-	-	74	-27.15	179	102	V
7.938	38.76	PK3	35.7	-26.9	47.56	-	-	-	-	179	102	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL  
 HORIZONTAL

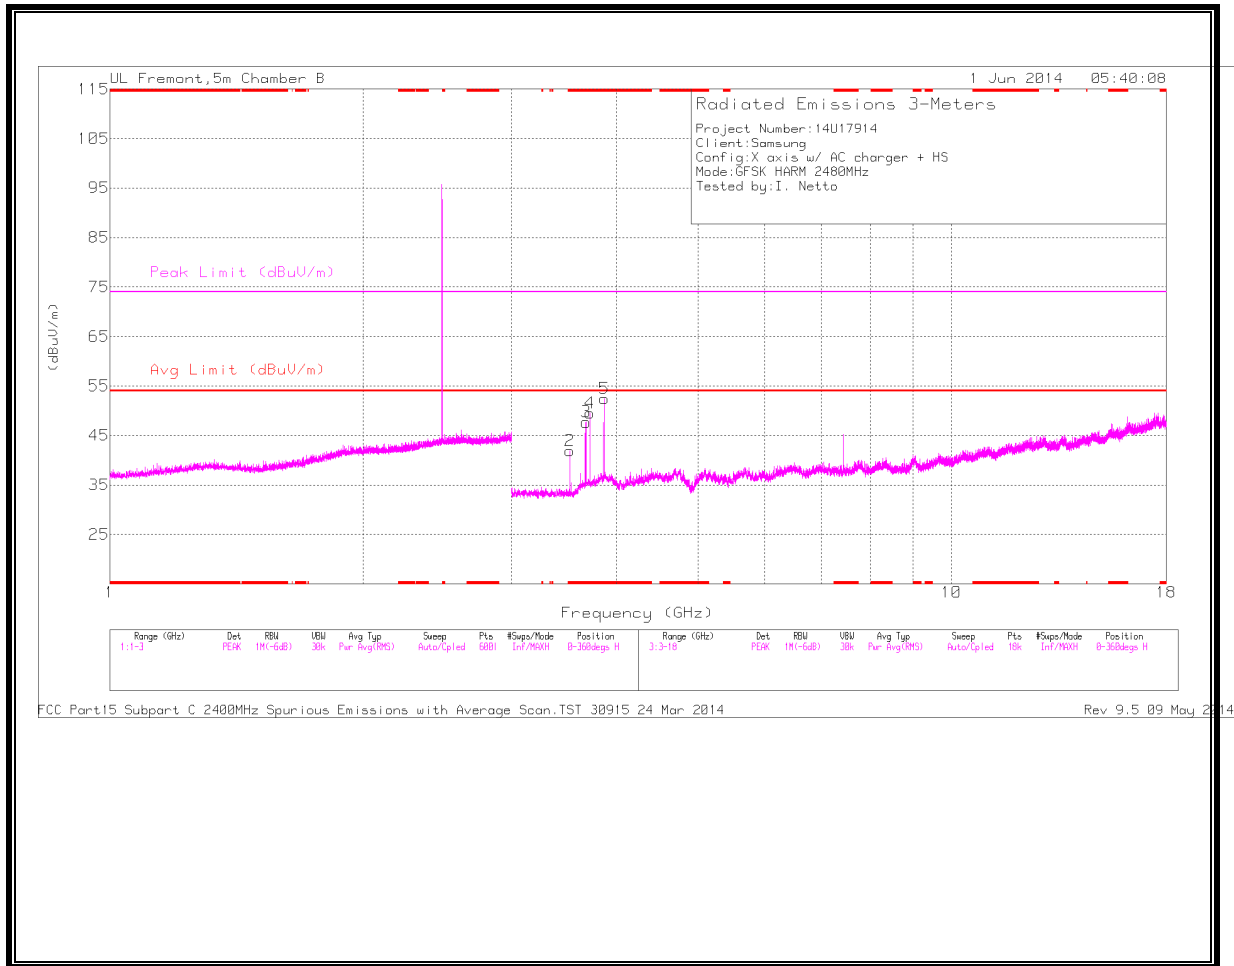

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

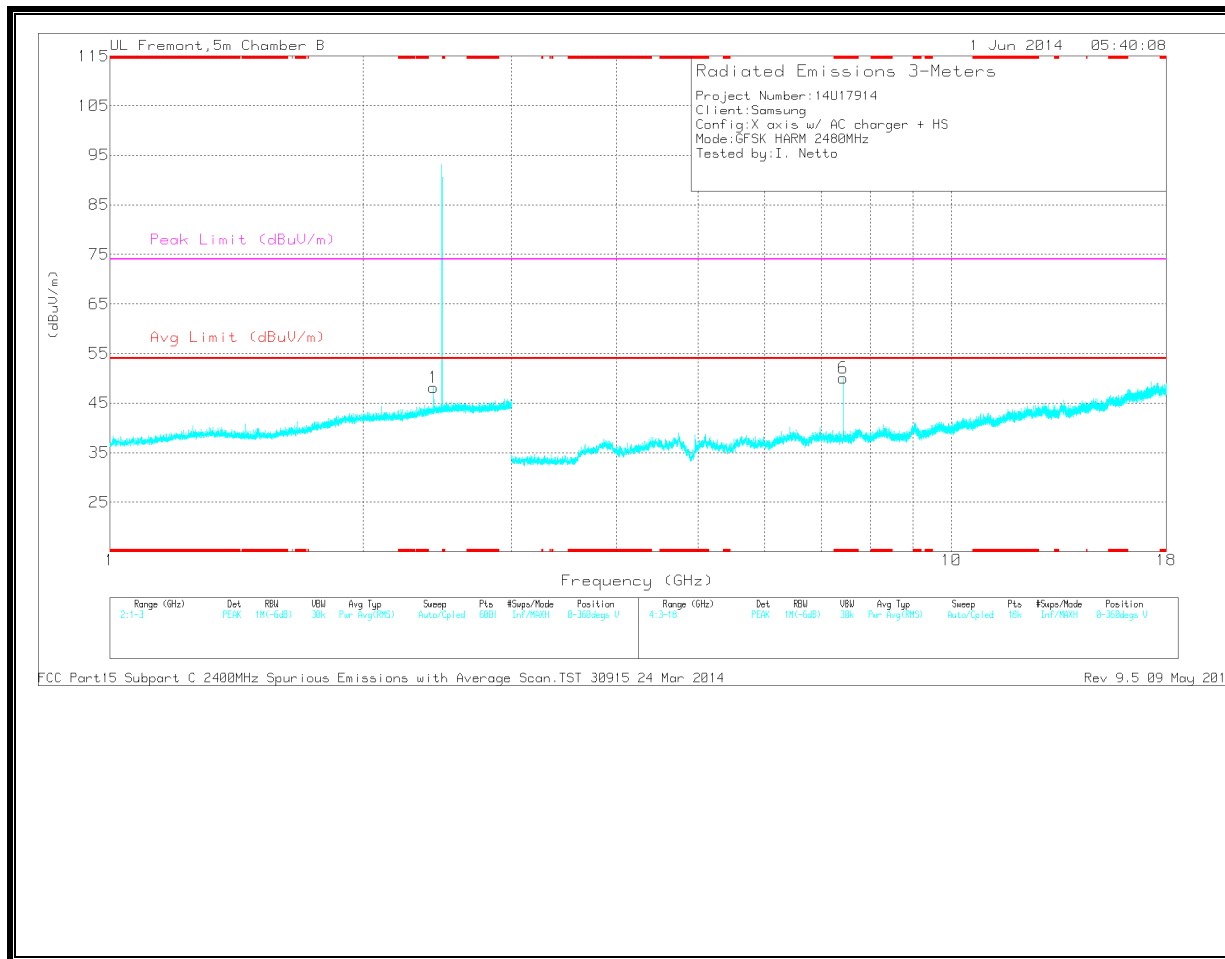

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.52	40.36	PK	32.9	-31.3	41.96	-	-	74	-32.04	0-360	100	H
3	* 3.678	45.6	PK	33.3	-31.2	47.7	-	-	74	-26.3	0-360	200	H
4	* 3.72	47.38	PK	33.4	-31.3	49.48	-	-	74	-24.52	0-360	100	H
5	* 3.87	49.05	PK	33.7	-30.3	52.45	-	-	74	-21.55	0-360	200	H
6	* 7.439	40.75	PK	35.6	-26.3	50.05	-	-	74	-23.95	0-360	201	V
1	2.426	38.49	PK	32.2	-22.6	48.09	-	-	-	-	0-360	100	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.521	40.92	PK3	32.9	-31.3	42.52	-	-	74	-31.48	349	247	H
* 3.52	28.38	VB1T	32.9	-31.3	29.98	54	-24.02	-	-	349	247	H
* 3.678	41.53	PK3	33.3	-31.2	43.63	-	-	74	-30.37	240	103	H
* 3.68	29.39	VB1T	33.3	-31.2	31.49	54	-22.51	-	-	240	103	H
* 3.72	41.47	PK3	33.4	-31.3	43.57	-	-	74	-30.43	355	208	H
* 3.721	29.51	VB1T	33.4	-31.4	31.51	54	-22.49	-	-	355	208	H
* 3.87	41.41	PK3	33.7	-30.3	44.81	-	-	74	-29.19	74	348	H
* 3.872	29.38	VB1T	33.8	-30.3	32.88	54	-21.12	-	-	74	348	H
* 7.439	46.37	PK3	35.6	-26.3	55.67	-	-	74	-18.33	75	263	V
* 7.44	41.88	VB1T	35.6	-26.3	51.18	54	-2.82	-	-	75	263	V
2.426	43.03	PK3	32.2	-22.6	52.63	-	-	-	-	0	101	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

### 9.2.2. ENHANCED DATA RATE 8PSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

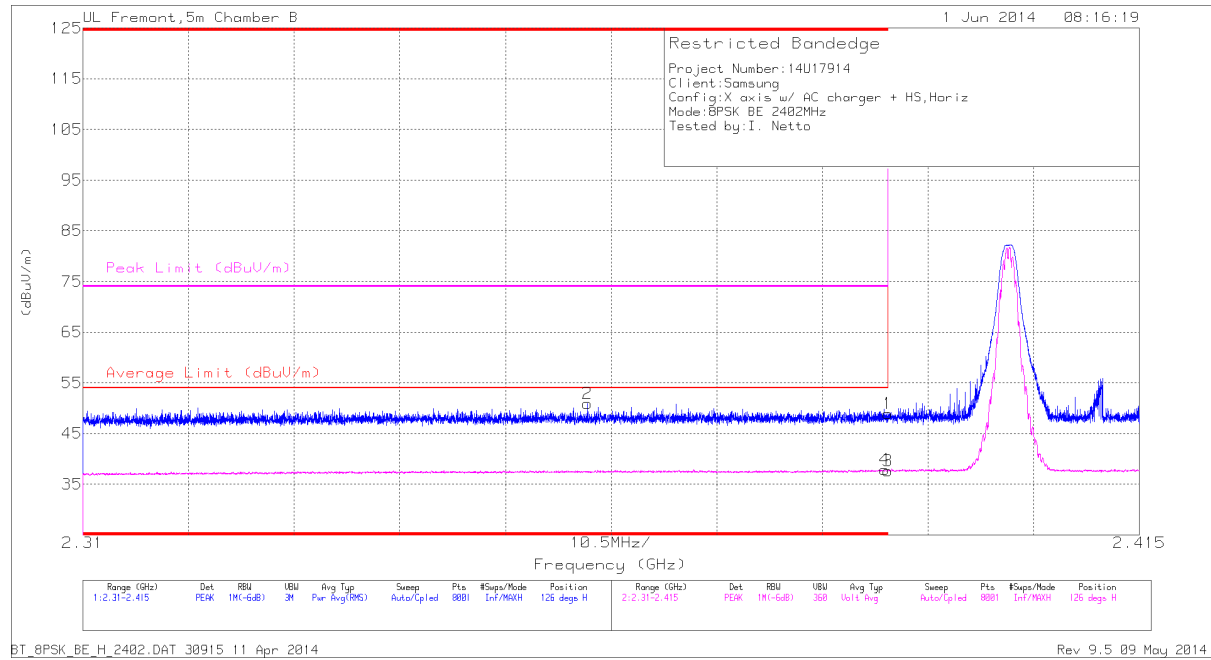


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	39.65	PK	32.1	-22.8	48.95	-	-	74	-25.05	126	399	H
2	* 2.36	41.79	PK	31.9	-22.8	50.89	-	-	74	-23.11	126	399	H
3	* 2.39	28.38	VB1T	32.1	-22.8	37.68	54	-16.32	-	-	126	399	H
4	* 2.39	28.54	VB1T	32.1	-22.8	37.84	54	-16.16	-	-	126	399	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

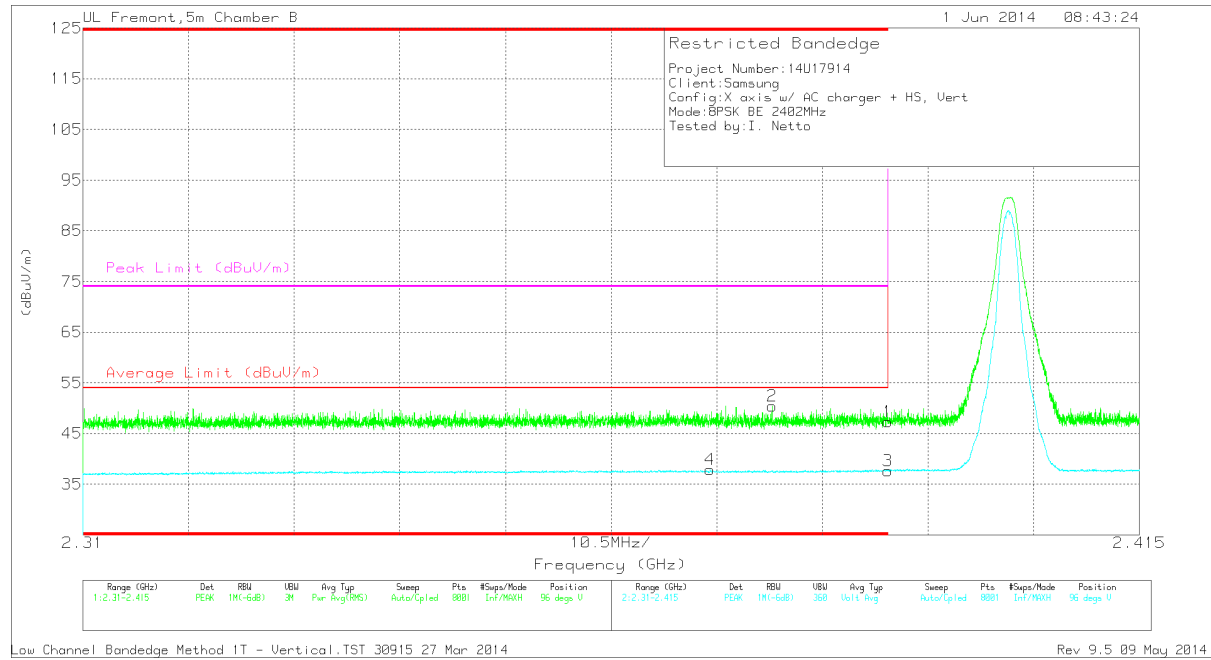


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	38.02	PK	32.1	-22.8	47.32	-	-	74	-26.68	96	360	V
2	* 2.378	41.3	PK	32	-22.9	50.4	-	-	74	-23.6	96	360	V
3	* 2.39	28.37	VB1T	32.1	-22.8	37.67	54	-16.33	-	-	96	360	V
4	* 2.372	28.73	VB1T	32	-22.8	37.93	54	-16.07	-	-	96	360	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

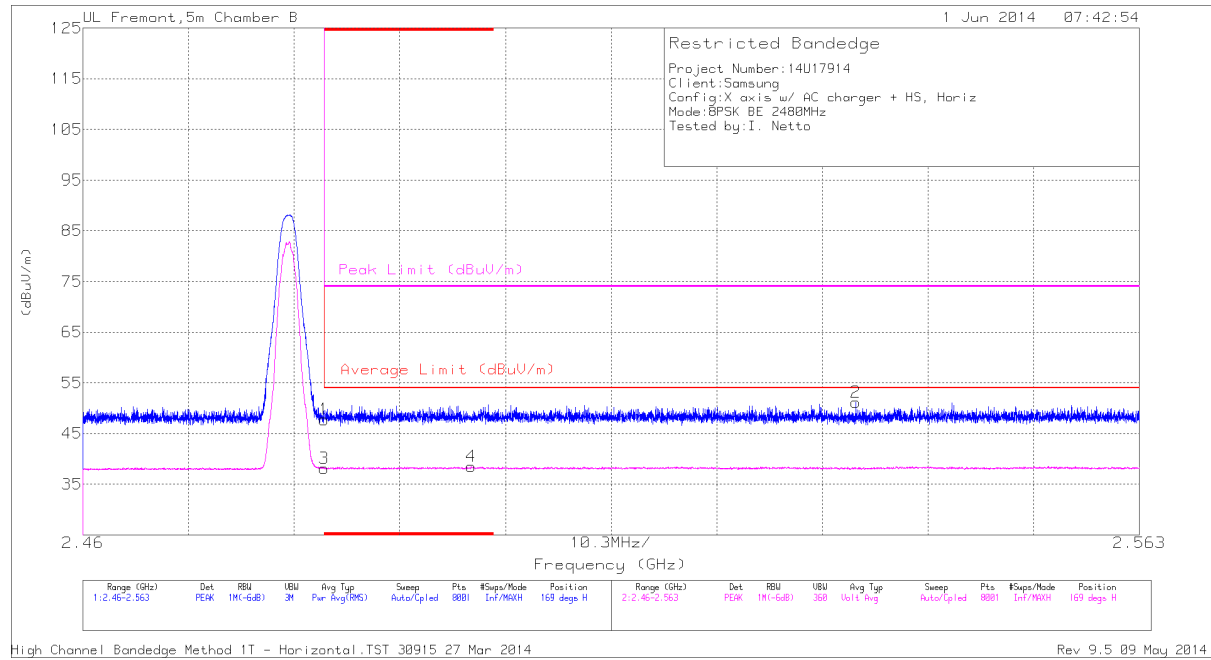


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.05	PK	32.4	-22.7	47.75	-	-	74	-26.25	169	131	H
3	* 2.484	28.38	VB1T	32.4	-22.7	38.08	54	-15.92	-	-	169	131	H
4	* 2.498	28.76	VB1T	32.4	-22.7	38.46	54	-15.54	-	-	169	131	H
2	2.535	41.27	PK	32.5	-22.6	51.17	-	-	74	-22.83	169	131	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

**RESTRICTED BANDEGE (HIGH CHANNEL, VERTICAL)**

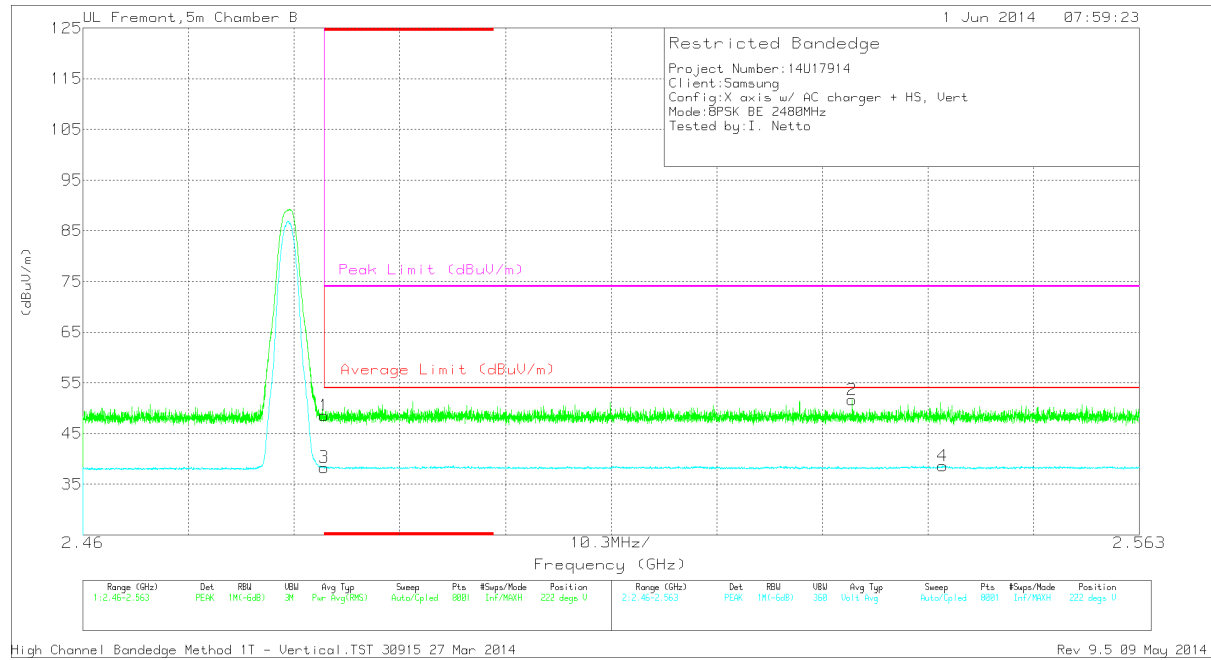

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/ Fitr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	38.88	PK	32.4	-22.7	48.58	-	-	74	-25.42	222	173	V
3	* 2.484	28.61	VB1T	32.4	-22.7	38.31	54	-15.69	-	-	222	173	V
2	2.535	41.72	PK	32.5	-22.6	51.62	-	-	74	-22.38	222	173	V
4	2.544	28.71	VB1T	32.5	-22.6	38.61	54	-15.39	-	-	222	173	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet


**HARMONICS AND SPURIOUS EMISSIONS**

**LOW CHANNEL  
 HORIZONTAL**

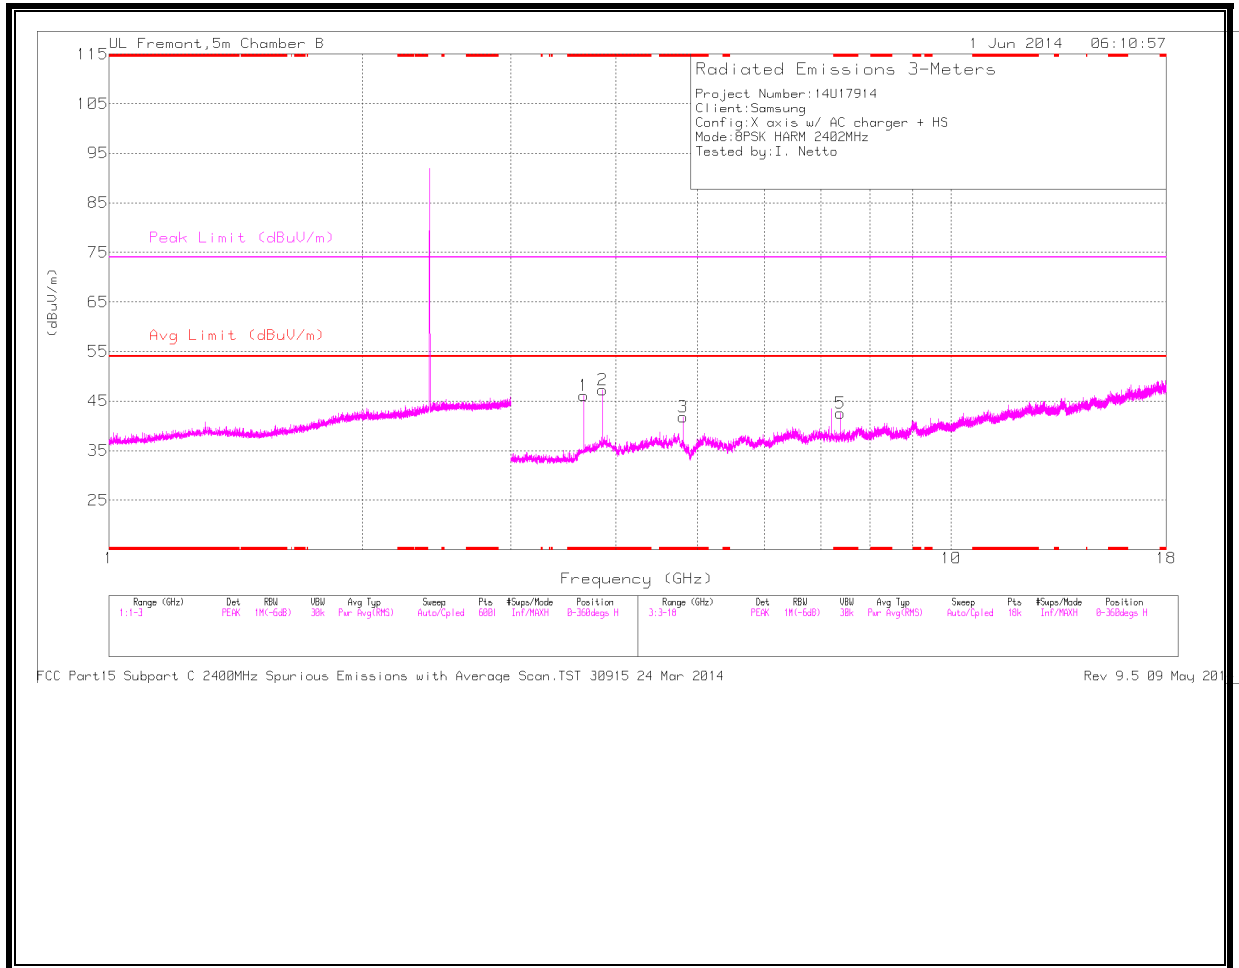

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

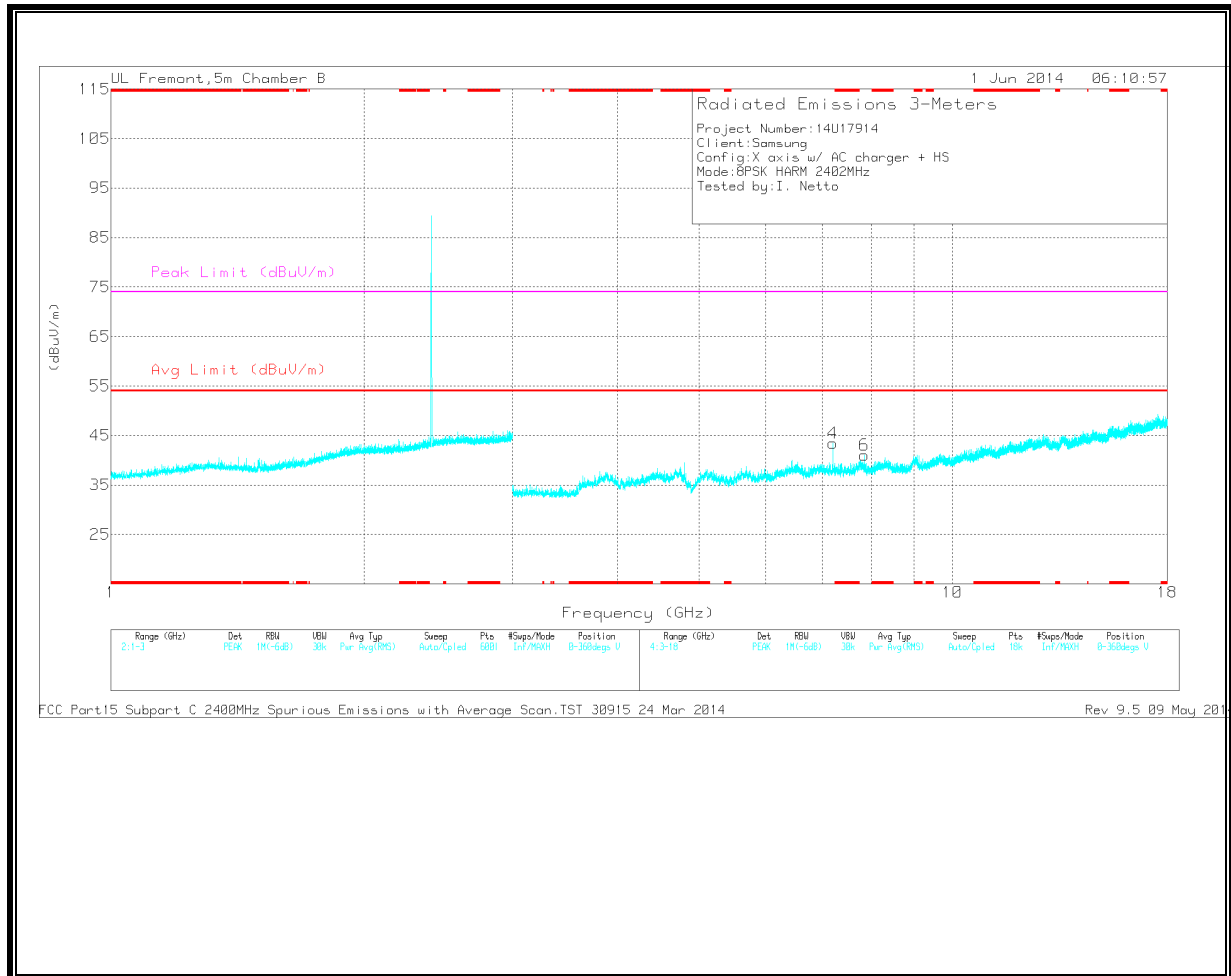

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

LOW CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 3.663	44	PK	33.3	-31.2	46.1	-	-	74	-27.9	0-360	201	H
2	* 3.857	43.99	PK	33.7	-30.4	47.29	-	-	74	-26.71	0-360	201	H
3	* 4.803	36.99	PK	34.2	-29.4	41.79	-	-	74	-32.21	0-360	201	H
5	* 7.386	34.37	PK	35.6	-27.4	42.57	-	-	74	-31.43	0-360	201	H
4	7.206	34.97	PK	35.5	-27	43.47	-	-	-	-	0-360	201	V
6	7.863	32.15	PK	35.7	-26.8	41.05	-	-	-	-	0-360	201	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.664	41.46	PK3	33.3	-31.2	43.56	-	-	74	-30.44	118	398	H
* 3.665	29.35	VB1T	33.3	-31.2	31.45	54	-22.55	-	-	118	398	H
* 3.857	41.25	PK3	33.7	-30.4	44.55	-	-	74	-29.45	345	361	H
* 3.858	28.96	VB1T	33.7	-30.4	32.26	54	-21.74	-	-	345	361	H
* 4.804	43.24	PK3	34.2	-29.4	48.04	-	-	74	-25.96	80	200	H
* 4.804	35.32	VB1T	34.2	-29.4	40.12	54	-13.88	-	-	80	200	H
* 7.386	38.76	PK3	35.6	-27.4	46.96	-	-	74	-27.04	80	200	H
7.206	39.7	PK3	35.5	-27	48.2	-	-	-	-	80	200	V
7.865	38.47	PK3	35.7	-26.8	47.37	-	-	-	-	80	200	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

MID CHANNEL  
 HORIZONTAL

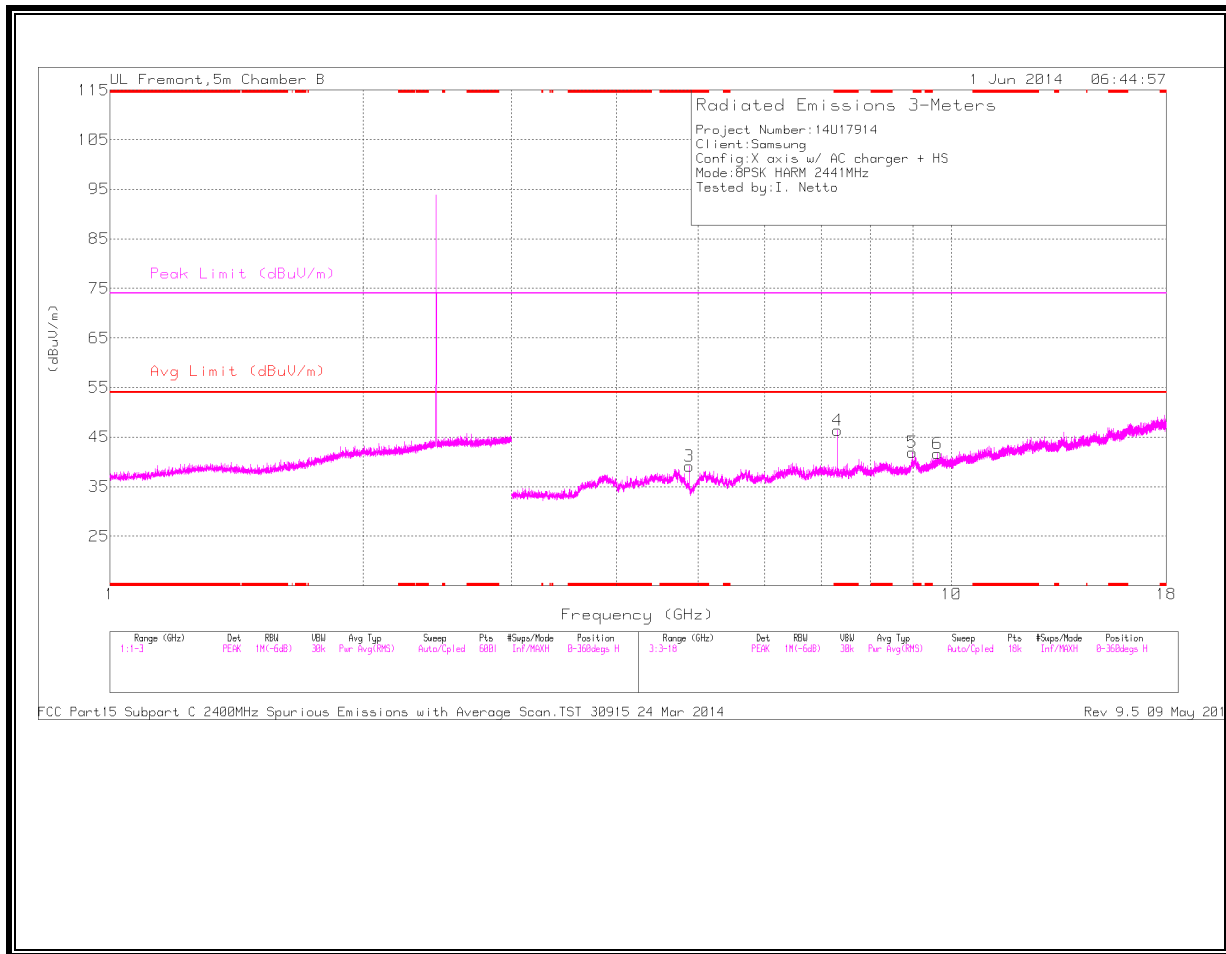

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

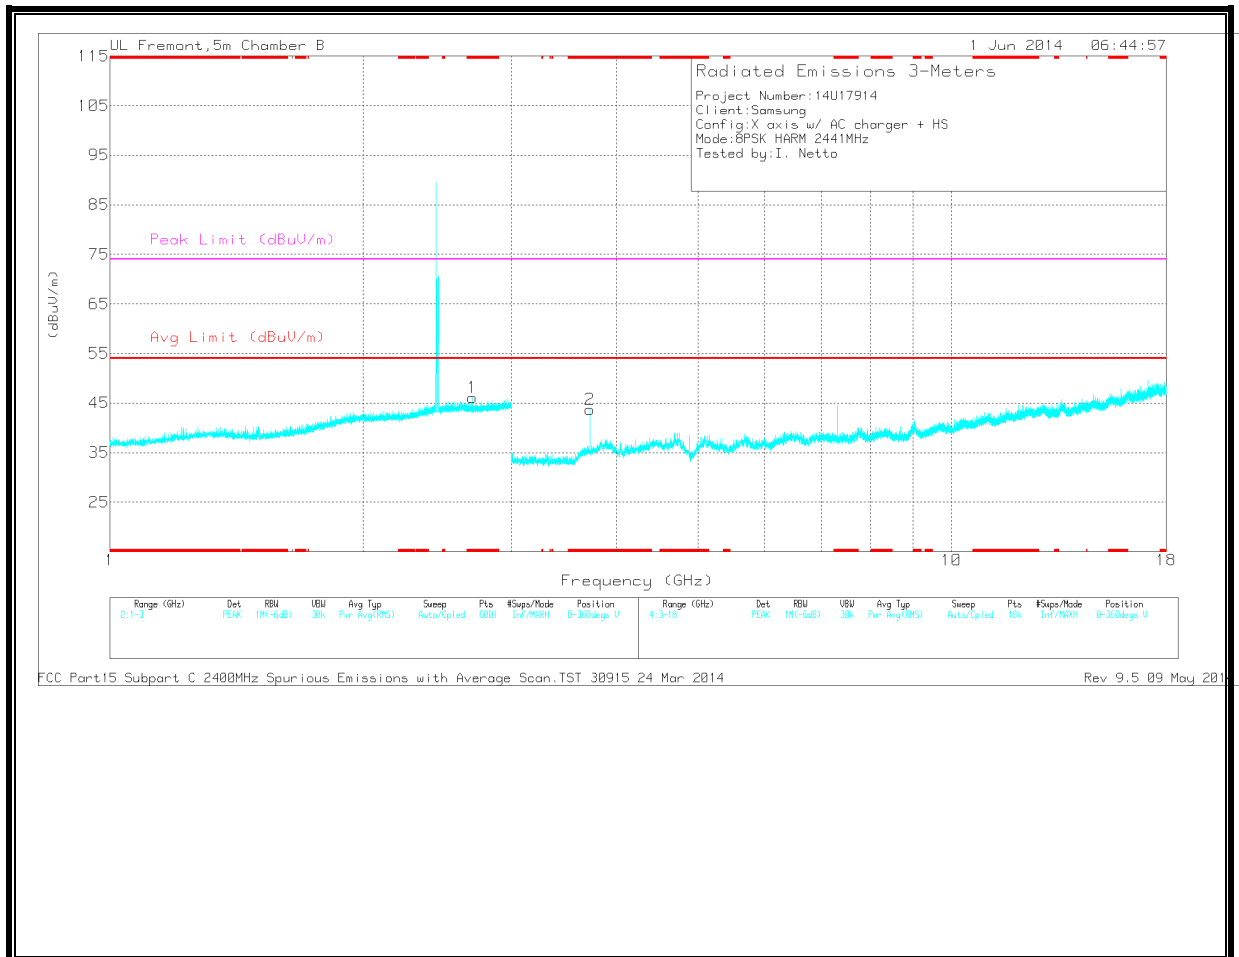

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

MID CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.697	36.43	PK	32.2	-22.5	46.13	-	-	74	-27.87	0-360	200	V
3	* 4.882	35.54	PK	34.2	-30.6	39.14	-	-	74	-34.86	0-360	201	H
4	* 7.322	38.89	PK	35.6	-28.1	46.39	-	-	74	-27.61	0-360	201	H
2	* 3.72	41.63	PK	33.4	-31.3	43.73	-	-	74	-30.27	0-360	101	V
5	8.987	29.69	PK	36.2	-24	41.89	-	-	-	-	0-360	101	H
6	9.627	28.77	PK	36.8	-23.9	41.67	-	-	-	-	0-360	101	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions


Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 2.695	43.73	PK3	32.2	-22.5	53.43	-	-	74	-20.57	174	201	V
* 7.323	45.7	PK3	35.6	-28.1	53.2	-	-	74	-20.8	174	231	H
* 7.323	37.56	VB1T	35.6	-28.1	45.06	54	-8.94	-	-	174	231	H
* 4.882	39.92	PK3	34.2	-30.6	43.52	-	-	74	-30.48	174	202	H
* 3.721	41.7	PK3	33.4	-31.4	43.7	-	-	74	-30.3	235	278	V
* 3.722	29.47	VB1T	33.4	-31.4	31.47	54	-22.53	-	-	235	278	V
8.989	37.15	PK3	36.2	-24	49.35	-	-	-	-	174	101	H
9.628	36.25	PK3	36.8	-23.9	49.15	-	-	-	-	174	101	H
9.628	35.91	PK3	36.8	-23.9	48.81	-	-	-	-	174	101	H

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK3 - FHSS Method: Maximum Peak


VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

HIGH CHANNEL  
 HORIZONTAL

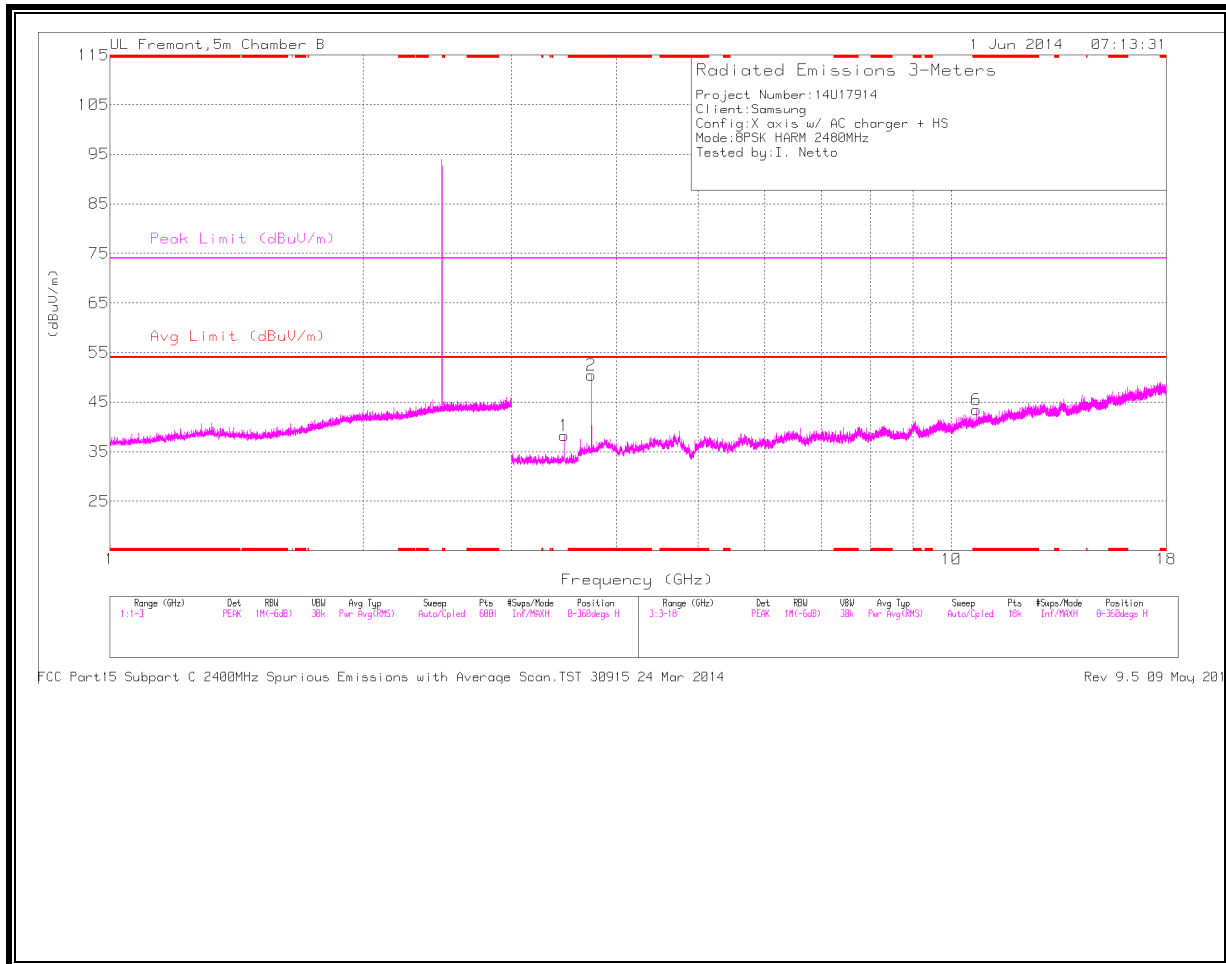

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

VERTICAL

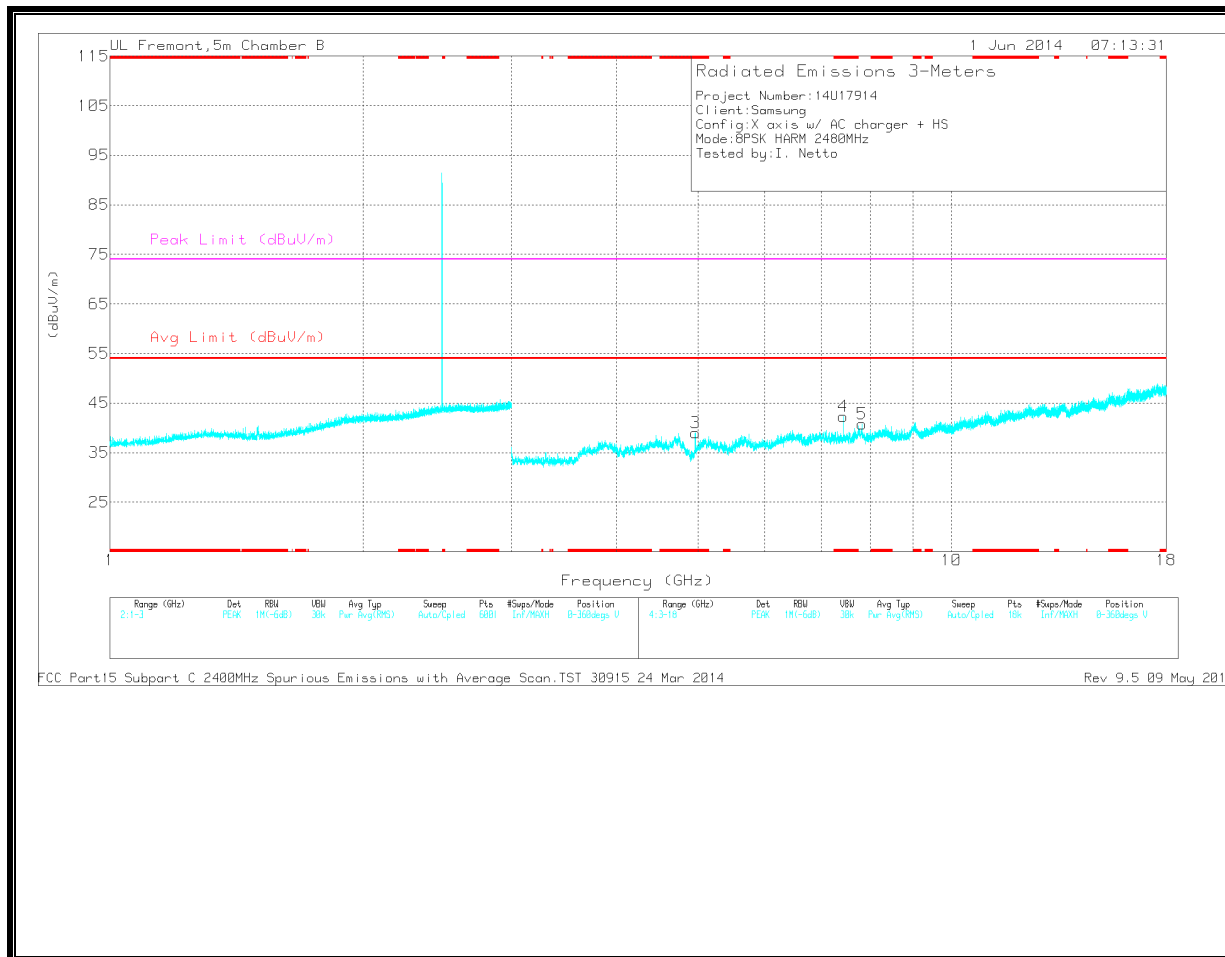

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

HIGH CHANNEL DATA

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 3.733	48.46	PK	33.4	-31.4	50.46	-	-	74	-23.54	0-360	101	H
6	* 10.71	27.96	PK	37.8	-22.3	43.46	-	-	74	-30.54	0-360	101	H
3	* 4.961	35.25	PK	34.2	-30.4	39.05	-	-	74	-34.95	0-360	201	V
4	* 7.44	32.97	PK	35.6	-26.3	42.27	-	-	74	-31.73	0-360	201	V
1	3.467	36.55	PK	32.8	-31.1	38.25	-	-	-	-	0-360	101	H
5	7.829	31.13	PK	35.7	-26.1	40.73	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector

Radiated Emissions

Frequency (GHz)	Meter Reading (dBuV)	Det	AF T345 (dB/m)	Amp/Cbl/Filtr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 3.734	41.31	PK3	33.4	-31.4	43.31	-	-	74	-30.69	73	184	H
* 3.735	29.36	VB1T	33.4	-31.4	31.36	54	-22.64	-	-	73	184	H
* 10.709	34.72	PK3	37.8	-22.3	50.22	-	-	74	-23.78	73	102	H
* 4.96	41.35	PK3	34.2	-30.4	45.15	-	-	74	-28.85	73	202	V
* 7.44	40.94	PK3	35.6	-26.3	50.24	-	-	74	-23.76	73	202	V
3.469	40.98	PK3	32.8	-31.1	42.68	-	-	-	-	73	102	H
7.829	37.78	PK3	35.7	-26.1	47.38	-	-	-	-	73	102	V


\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


PK3 - FHSS Method: Maximum Peak

VB1T - FHSS Method: VB=1/Ton, Voltage Averaging Max Hold where: Ton is the duration of the packet

### 9.3. WORST-CASE BELOW 1 GHz

#### **GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)**

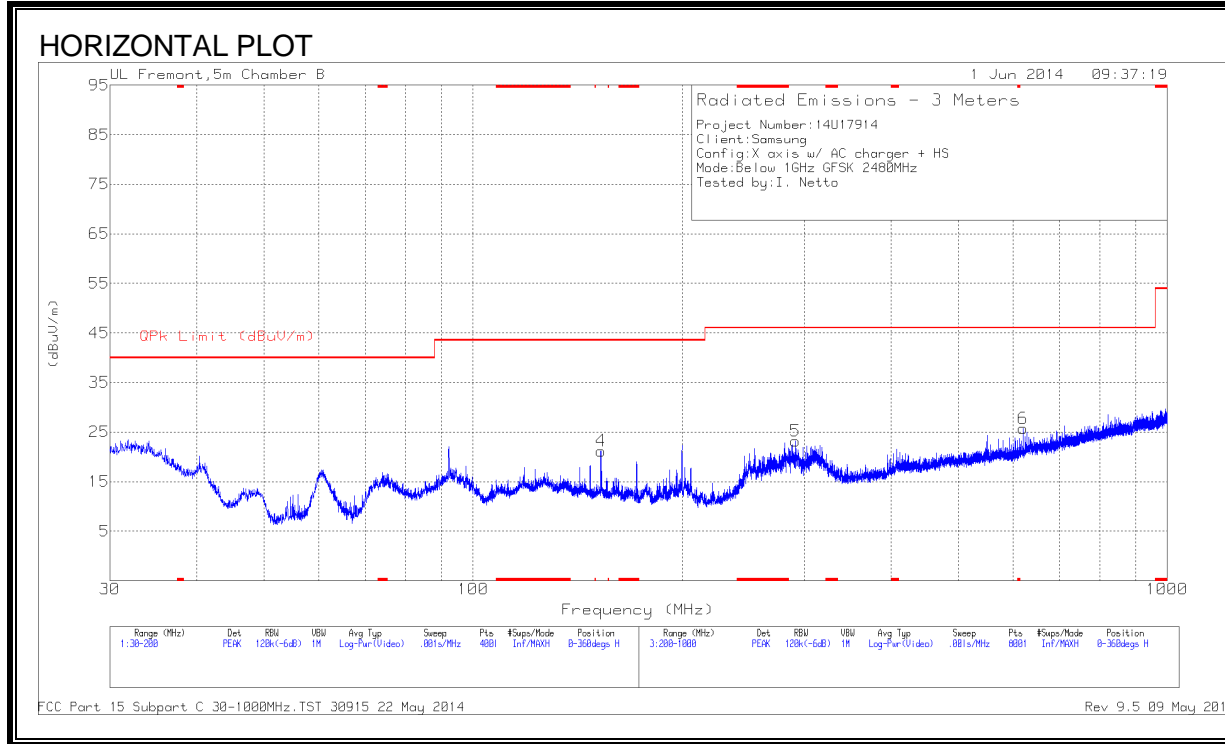

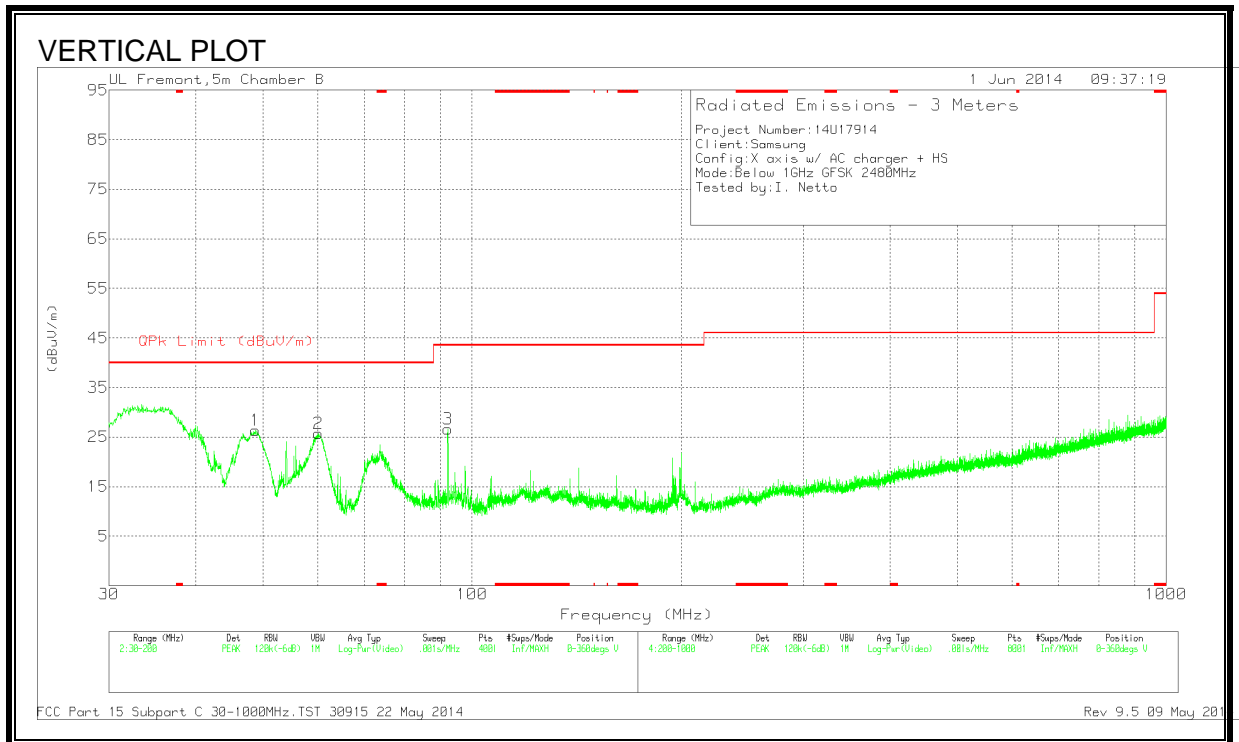

DATA

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AF T243 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	48.785	46.37	PK	8.5	-28.5	26.37	40	-13.63	0-360	100	V
2	60.0475	46.69	PK	7.4	-28.4	25.69	40	-14.31	0-360	100	V
3	92.305	46.47	PK	8.2	-28.1	26.57	43.52	-16.95	0-360	100	V
4	152.825	36.32	PK	12.3	-27.4	21.22	43.52	-22.3	0-360	200	H
5	291.6	35.9	PK	13.3	-26	23.2	46.02	-22.82	0-360	100	H
6	620	31.87	PK	19	-25.2	25.67	46.02	-20.35	0-360	100	H

PK - Peak detector

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS

**6 WORST EMISSIONS**


Line-L1 .15 - 30MHz

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L1 (dB)	LC Cables 1&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
1	.15	44.3	PK	1.4	0	45.7	66	-20.3	-	-
2	.15	22.86	Av	1.4	0	24.26	-	-	56	-31.74
3	.276	46.7	PK	.6	0	47.3	60.9	-13.6	-	-
4	.276	32.28	Av	.6	0	32.88	-	-	50.9	-18.02
5	.411	34.97	PK	.4	0	35.37	57.6	-22.23	-	-
6	.411	18.73	Av	.4	0	19.13	-	-	47.6	-28.47
7	.564	31.98	PK	.3	0	32.28	56	-23.72	-	-
8	.564	17.4	Av	.3	0	17.7	-	-	46	-28.3
9	2.0445	34.17	PK	.2	.1	34.47	56	-21.53	-	-
10	2.0445	15.33	Av	.2	.1	15.63	-	-	46	-30.37
11	4.605	38.11	PK	.2	.1	38.41	56	-17.59	-	-
12	4.605	18.77	Av	.2	.1	19.07	-	-	46	-26.93
15	15.3465	38.85	PK	.3	.2	39.35	60	-20.65	-	-
16	15.3465	22.18	Av	.3	.2	22.68	-	-	50	-27.32
13	15.4545	39.22	PK	.3	.2	39.72	60	-20.28	-	-
14	15.4545	24.63	Av	.3	.2	25.13	-	-	50	-24.87

Line-L2 .15 - 30MHz

Trace Markers										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	T24 IL L2 (dB)	LC Cables 2&3 (dB)	Corrected Reading dBuV	CISPR 22 Class B QP	Margin to Limit (dB)	CISPR 22 Class B Avg	Margin to Limit (dB)
17	.15	46.82	PK	1.5	0	48.32	66	-17.68	-	-
18	.15	21.57	Av	1.5	0	23.07	-	-	56	-32.93
19	.267	41.72	PK	.7	0	42.42	61.2	-18.78	-	-
20	.267	20.25	Av	.7	0	20.95	-	-	51.2	-30.25
21	.4335	30.99	PK	.4	0	31.39	57.2	-25.81	-	-
22	.4335	13.21	Av	.4	0	13.61	-	-	47.2	-33.59
23	.852	30.17	PK	.3	0	30.47	56	-25.53	-	-
24	.852	12.76	Av	.3	0	13.06	-	-	46	-32.94
25	1.986	28.44	PK	.2	.1	28.74	56	-27.26	-	-
26	1.986	8.63	Av	.2	.1	8.93	-	-	46	-37.07
27	4.623	35.52	PK	.2	.1	35.82	56	-20.18	-	-
28	4.623	15.16	Av	.2	.1	15.46	-	-	46	-30.54
29	5.0775	37.46	PK	.2	.1	37.76	60	-22.24	-	-
30	5.0775	14.18	Av	.2	.1	14.48	-	-	50	-35.52
31	15.234	41.37	PK	.3	.2	41.87	60	-18.13	-	-
32	15.234	25.19	Av	.3	.2	25.69	-	-	50	-24.31

**LINE 1 RESULTS**

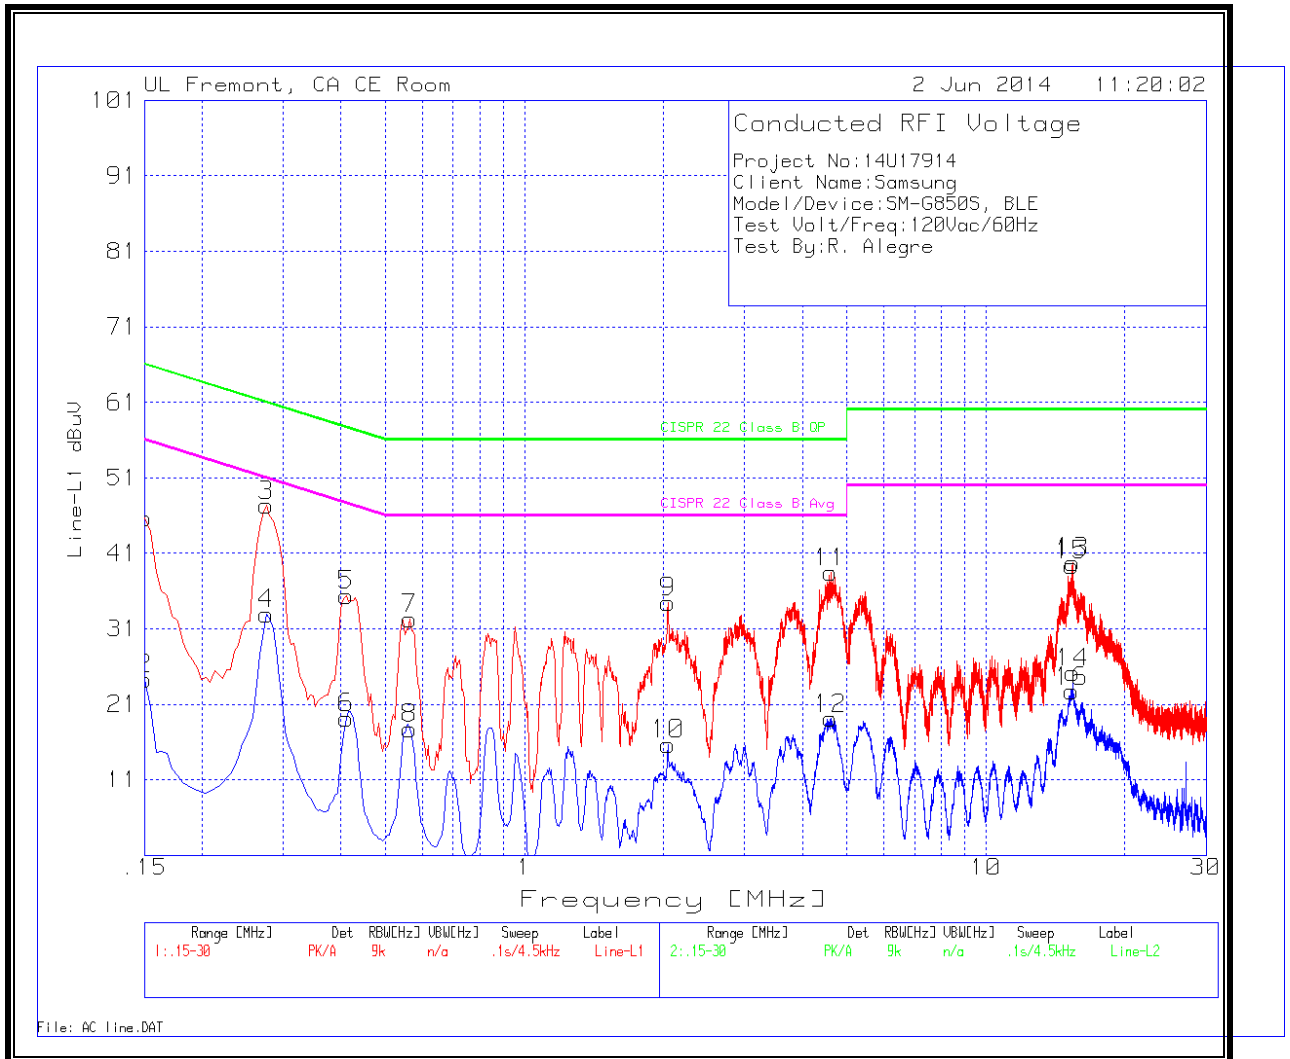

**LINE 2 RESULTS**

