

FCC LTE REPORT

Certification

Applicant Name: SAMSUNG Electronics Co., Ltd.	Date of Issue: May 24, 2018
Address: 129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea	Location: HCT CO., LTD., 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
	Report No.: HCT-RF-1805-FC046

FCC ID: A3LSMG885S

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-G885S
EUT Type: Mobile Phone
FCC Classification: Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s): §27, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W)	Max. Power (dBm)
LTE – Band 41 (5)	2498.5 – 2687.5	4M50G7D	QPSK	0.166	22.21
		4M50W7D	16QAM	0.138	21.41
		4M51W7D	64QAM	0.111	20.44
LTE – Band 41 (10)	2501.0 – 2685.0	8M97G7D	QPSK	0.166	22.19
		9M00W7D	16QAM	0.140	21.47
		8M99W7D	64QAM	0.112	20.48
LTE – Band 41 (15)	2503.5 – 2682.5	13M5G7D	QPSK	0.164	22.14
		13M5W7D	16QAM	0.137	21.37
		13M4W7D	64QAM	0.109	20.39
LTE – Band 41 (20)	2506.0 – 2680.0	18M0G7D	QPSK	0.149	21.73
		17M9W7D	16QAM	0.125	20.96
		17M9W7D	64QAM	0.099	19.96

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)




Report prepared by : Jae Ryang Do
 Engineer of Telecommunication Testing Center

Report approved by : Jong Seok Lee
 Manager of Telecommunication Testing Center

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1805-FC046	May 24, 2018	- First Approval Report

Table of Contents

1. GENERAL INFORMATION	4
2. INTRODUCTION	5
2.1. DESCRIPTION OF EUT	5
2.2. MEASURING INSTRUMENT CALIBRATION	5
2.3. TEST FACILITY	5
3. DESCRIPTION OF TESTS	6
3.1 TEST PROCEDURE	6
3.2 RADIATED POWER	7
3.3 RADIATED SPURIOUS EMISSIONS	8
3.4 OCCUPIED BANDWIDTH	9
3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	10
3.6 CHANNEL EDGE.....	11
3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	12
3.8 WORST CASE(RADIATED TEST).....	13
3.9 WORST CASE(CONDUCTED TEST)	14
4. LIST OF TEST EQUIPMENT	15
5. MEASUREMENT UNCERTAINTY	16
6. SUMMARY OF TEST RESULTS	17
7. SAMPLE CALCULATION	18
8. TEST DATA	20
8.1 EQUIVALENT ISOTROPIC RADIATED POWER	20
8.3 RADIATED SPURIOUS EMISSIONS	22
8.3 OCCUPIED BANDWIDTH	26
8.4 CONDUCTED SPURIOUS EMISSIONS	27
8.5 CHANNEL EDGE.....	28
8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	29
8.7 GEO-LOCATION MECHANISM	41
9. TEST PLOTS.....	48

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMG885S
Application Type:	Certification
FCC Classification:	Licensed Portable Transmitter Held to Ear (PCE)
FCC Rule Part(s):	§27, §2
EUT Type:	Mobile Phone
Model(s):	SM-G885S
Tx Frequency:	2498.5 – 2687.5 : 5 MHz 2501.0 – 2685.0 : 10 MHz 2503.5 – 2682.5 : 15 MHz 2506.0 – 2680.0 : 20 MHz
Date(s) of Tests:	May 07, 2018 ~ May 18, 2018

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.

It also supports IEEE 802.11a/b/g/n/ac (HT20/40/80), Bluetooth, NFC and ANT+.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.


Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data

3.4 OCCUPIED BANDWIDTH.

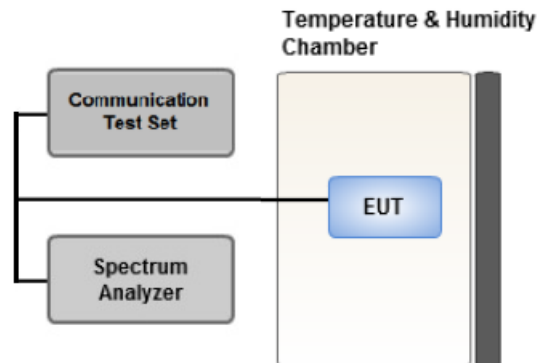

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

3.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

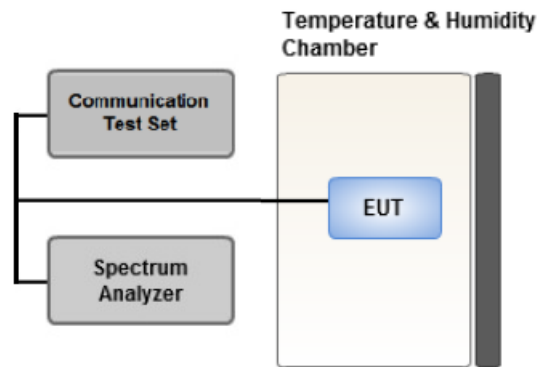

Test setup


Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW \geq 3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep $\geq 2 * \text{Span} / \text{RBW}$

3.6 CHANNEL EDGE

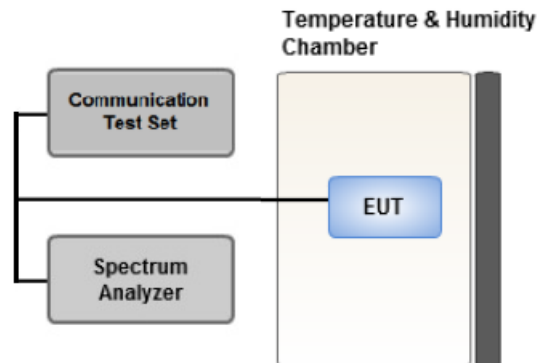

Test setup

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


Test Settings

1. Start and stop frequency were set such that the channel edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 2% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Notes

1. The attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz.
2. All measurements were done at 3 channels.
3. The channel edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

3.7 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

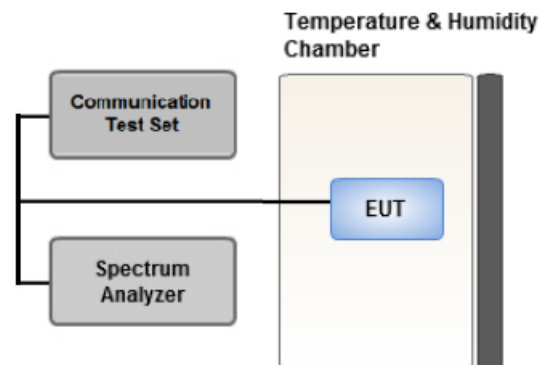

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.8 WORST CASE(RADIATED TEST)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data.
- Please refer to the table below.

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	QPSK, 16QAM, 64QAM	1	0	X
Radiated Spurious and Harmonic Emissions	QPSK	1	0	Z

3.9 WORST CASE(CONDUCTED TEST)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth	QPSK, 16QAM, 64QAM	1.4, 3, 5, 10, 15, 20	Low, Mid, High	Full RB	0
Band Edge	* QPSK	1.4	Low	1	0
			High	1	5
		3	Low	1	0
			High	1	14
		5	Low	1	0
			High	1	24
		10	Low	1	0
			High	1	49
		15	Low	1	0
			High	1	74
		20	Low	1	0
			High	1	99
		1.4, 3, 5, 10, 15, 20	Low, High	Full RB	0
Channel Edge	* QPSK	1.4, 3, 5, 10, 15, 20	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	* QPSK	1	Low, Mid, High	1	0

* Worst case : Of all modulation, We have tested modulation of the high Conducted Output Power.
 Conducted Output Power value can be confirmed on the SAR report.

4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/12/2017	Annual	06/12/2018
Agilent	E3632A/DC Power Supply	KR75303243	07/18/2017	Annual	07/18/2018
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	07/21/2017	Annual	07/21/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/09/2016	Biennial	09/09/2018
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/14/2016	Biennial	10/14/2018
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/01/2017	Annual	06/01/2018
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/22/2017	Annual	06/22/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/30/2017	Annual	10/30/2018
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/26/2017	Annual	09/26/2018
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	04/19/2017	Biennial	04/19/2019
Schwarzbeck	VULB9160/ Bilog Antenna	3150	09/30/2016	Biennial	09/30/2018
Schwarzbeck	VULB9160/ Bilog Antenna	9360-3368	10/14/2016	Biennial	10/14/2018
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6200863156	02/13/2018	Annual	02/13/2019
Anritsu Corp.	MT8820C/Wideband Radio Communication Tester	6201026545	02/08/2018	Annual	02/08/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/18/2017	Annual	07/18/2018
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer	100931	10/30/2017	Annual	10/30/2018
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	08/16/2017	Annual	08/16/2018
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §27.53(m)(4)	<ul style="list-style-type: none"> ■ $< 40 + 10\log_{10} (P[\text{Watts}])$ at Channel edges ■ $< 43 + 10\log_{10} (P[\text{Watts}])$ between 5 and X MHz from Channel edges ■ $< 55 + 10\log_{10} (P[\text{Watts}])$ beyond X MHz beyond from Channel edges ■ $< 43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz 	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Frequency stability / variation of ambient temperature	§2.1055, §27.54	Emission must remain in band	PASS

Note:

1. See SAR Report

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§27.50(h)(2)	< 2 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §27.53(m)(4)	$< 55 + 10\log_{10} (P[\text{Watts}])$	PASS

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
40620	2593.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

16QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

64QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2498.5	LTE B41/ 5 MHz	QPSK	-23.57	12.12	10.95	2.35	H	< 2.00	0.118	20.72
		16-QAM	-24.48	11.21	10.95	2.35	H		0.096	19.81
		64-QAM	-25.48	10.21	10.95	2.35	H		0.076	18.81
2593.0		QPSK	-22.33	13.58	11.03	2.40	H		0.166	22.21
		16-QAM	-23.13	12.78	11.03	2.40	H		0.138	21.41
		64-QAM	-24.10	11.81	11.03	2.40	H		0.111	20.44
2687.5		QPSK	-23.68	12.64	11.10	2.46	H		0.134	21.28
		16-QAM	-24.46	11.86	11.10	2.46	H		0.112	20.50
		64-QAM	-25.44	10.88	11.10	2.46	H		0.090	19.52

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
									W	W
2501.0	LTE B41/ 10 MHz	QPSK	-23.61	12.08	10.95	2.35	H	< 2.00	0.117	20.68
		16-QAM	-24.54	11.15	10.95	2.35	H		0.094	19.75
		64-QAM	-25.52	10.17	10.95	2.35	H		0.075	18.77
2593.0		QPSK	-22.35	13.56	11.03	2.40	H		0.166	22.19
		16-QAM	-23.07	12.84	11.03	2.40	H		0.140	21.47
		64-QAM	-24.06	11.85	11.03	2.40	H		0.112	20.48
2685.0		QPSK	-23.53	12.75	11.09	2.46	H		0.137	21.38
		16-QAM	-24.28	12.00	11.09	2.46	H		0.116	20.63
		64-QAM	-25.25	11.03	11.09	2.46	H		0.092	19.66

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2503.5	LTE B41/ 15 MHz	QPSK	-23.54	12.14	10.95	2.35	H	< 2.00	0.119	20.74
		16-QAM	-24.47	11.21	10.95	2.35	H		0.096	19.81
		64-QAM	-25.47	10.21	10.95	2.35	H		0.076	18.81
2593.0		QPSK	-22.40	13.51	11.03	2.40	H		0.164	22.14
		16-QAM	-23.17	12.74	11.03	2.40	H		0.137	21.37
		64-QAM	-24.15	11.76	11.03	2.40	H		0.109	20.39
2682.5		QPSK	-24.16	12.06	11.09	2.46	H		0.117	20.69
		16-QAM	-24.94	11.28	11.09	2.46	H		0.098	19.91
		64-QAM	-25.91	10.31	11.09	2.46	H		0.078	18.94

Freq (MHz)	Bandwidth	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	Limit	EIRP	
								W	W	dBm
2506.0	LTE B41/ 20 MHz	QPSK	-23.61	12.07	10.95	2.35	H	< 2.00	0.117	20.67
		16-QAM	-24.49	11.19	10.95	2.35	H		0.095	19.79
		64-QAM	-25.45	10.23	10.95	2.35	H		0.076	18.83
2593.0		QPSK	-22.81	13.10	11.03	2.40	H		0.149	21.73
		16-QAM	-23.58	12.33	11.03	2.40	H		0.125	20.96
		64-QAM	-24.58	11.33	11.03	2.40	H		0.099	19.96
2680.0		QPSK	-23.46	12.72	11.09	2.46	H		0.136	21.35
		16-QAM	-24.26	11.92	11.09	2.46	H		0.113	20.55
		64-QAM	-25.25	10.93	11.09	2.46	H		0.090	19.56

8.3 RADIATED SPURIOUS EMISSIONS

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.21 dBm = 0.166 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 5 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.21 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39675 (2498.5)	4,997.00	-35.98	12.57	-50.51	3.39	V	-41.33	63.54	Peak
	7,495.50	-35.13	11.71	-42.87	4.17	V	-35.33	57.54	Average
	9,994.00	-36.63	11.03	-40.05	5.00	H	-34.02	56.23	Peak
	12,492.50	-42.49	14.03	-47.79	5.63	V	-39.39	61.60	Peak
40620 (2593.0)	5,186.00	-37.54	12.84	-51.75	3.47	H	-42.38	64.59	Peak
	7,779.00	-29.80	11.50	-37.58	4.27	V	-30.35	52.56	Average
	10,372.00	-33.86	10.81	-38.10	5.06	H	-32.35	54.56	Peak
	12,965.00	-46.80	13.50	-50.38	5.74	V	-42.62	64.83	Peak
41565 (2687.5)	5,375.00	-39.27	13.11	-52.81	3.53	V	-43.23	65.44	Peak
	8,062.50	-31.32	11.44	-37.38	4.42	H	-30.36	52.57	Average
	10,750.00	-39.21	10.70	-43.04	5.09	H	-37.43	59.64	Peak
	13,437.50	-53.09	12.70	-54.56	5.82	V	-47.68	69.89	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.19 dBm = 0.166 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 10 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.19 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39700 (2501.0)	5,002.00	-36.21	12.57	-50.48	3.40	H	-41.31	63.50	Peak
	7,503.00	-31.53	11.71	-39.78	4.19	V	-32.26	54.45	Peak
	10,004.00	-37.46	11.02	-40.92	5.04	H	-34.94	57.13	Peak
	12,505.00	-42.49	14.05	-47.98	5.68	V	-39.61	61.80	Peak
40620 (2593.0)	5,186.00	-37.27	12.84	-51.48	3.47	V	-42.11	64.30	Peak
	7,779.00	-30.22	11.50	-38.00	4.27	V	-30.77	52.96	Average
	10,372.00	-35.42	10.81	-39.66	5.06	H	-33.91	56.10	Peak
	12,965.00	-47.29	13.50	-50.87	5.74	V	-43.11	65.30	Peak
41540 (2685.0)	5,370.00	-40.16	13.10	-53.68	3.53	H	-44.11	66.30	Peak
	8,055.00	-31.09	11.43	-37.07	4.42	H	-30.06	52.25	Peak
	10,740.00	-39.42	10.70	-42.95	5.11	H	-37.36	59.55	Average
	13,425.00	-51.06	12.71	-52.81	5.81	H	-45.91	68.10	Peak
	16,110.00	-53.75	16.97	-59.71	6.49	H	-49.23	71.42	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 22.14 dBm = 0.164 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 15 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 47.14 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39725 (2503.5)	5,007.00	-36.19	12.58	-50.08	3.40	H	-40.90	63.04	Peak
	7,510.50	-32.16	11.70	-40.63	4.15	H	-33.08	55.22	Peak
	10,014.00	-38.21	11.01	-41.99	5.02	H	-36.00	58.14	Peak
	12,517.50	-42.91	14.03	-48.46	5.71	V	-40.14	62.28	Peak
40620 (2593.0)	5,186.00	-37.06	12.84	-51.27	3.47	V	-41.90	64.04	Peak
	7,779.00	-29.50	11.50	-37.28	4.27	V	-30.05	52.19	Average
	10,372.00	-33.40	10.81	-37.64	5.06	H	-31.89	54.03	Peak
	12,965.00	-46.17	13.50	-49.75	5.74	H	-41.99	64.13	Peak
41515 (2682.5)	5,365.00	-41.27	13.10	-54.61	3.54	H	-45.05	67.19	Peak
	8,047.50	-32.27	11.40	-38.40	4.40	H	-31.40	53.54	Average
	10,730.00	-38.57	10.71	-42.03	5.12	H	-36.44	58.58	Peak
	13,412.50	-49.70	12.74	-51.65	5.84	H	-44.75	66.89	Peak

- ▣ OPERATING FREQUENCY : 2593.00 MHz
- ▣ MEASURED OUTPUT POWER: 21.73 dBm = 0.149 W
- ▣ MODE: LTE B41
- ▣ MODULATION SIGNAL: 20 MHz QPSK
- ▣ DISTANCE: 1 meters
- ▣ LIMIT: $55 + 10 \log_{10}(W) =$ 46.73 dBc

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	EIRP (dBm)	dBc	Detector
39750 (2506.0)	5,012.00	-36.79	12.58	-50.24	3.40	H	-41.06	62.79	Peak
	7,518.00	-31.27	11.70	-39.73	3.98	H	-32.01	53.74	Peak
	10,024.00	-36.85	11.01	-40.57	5.08	H	-34.64	56.37	Peak
	12,530.00	-42.93	14.01	-48.83	5.71	V	-40.53	62.26	Peak
40620 (2593.0)	5,186.00	-37.75	12.84	-51.96	3.47	V	-42.59	64.32	Peak
	7,779.00	-31.26	11.50	-39.04	4.27	V	-31.81	53.54	Average
	10,372.00	-35.17	10.81	-39.41	5.06	H	-33.66	55.39	Peak
	12,965.00	-46.45	13.50	-50.03	5.74	H	-42.27	64.00	Peak
41490 (2680.0)	5,360.00	-40.99	13.09	-54.15	3.54	V	-44.60	66.33	Peak
	8,040.00	-32.28	11.40	-38.62	4.40	H	-31.62	53.35	Average
	10,720.00	-38.65	10.71	-41.57	5.13	H	-35.99	57.72	Peak
	13,400.00	-47.46	12.75	-49.35	5.90	V	-42.50	64.23	Peak

8.3 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
41	5 MHz	2593.0	QPSK	25	0	4.5021
			16-QAM			4.5013
			64-QAM			4.5140
	10 MHz		QPSK	50		8.9689
			16-QAM			8.9957
			64-QAM			8.9943
	15 MHz		QPSK	75		13.450
			16-QAM			13.456
			64-QAM			13.434
	20 MHz		QPSK	100		17.959
			16-QAM			17.921
			64-QAM			17.911

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 49 ~ 60.

8.4 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
41	5	2498.5	26.2772	30.131	-66.862	-36.731	-25.00
		2593.0	24.2700	30.131	-67.321	-37.190	
		2687.5	26.0949	30.131	-67.370	-37.239	
	10	2501.0	4.9936	27.976	-66.467	-38.491	
		2593.0	26.3148	30.131	-66.366	-36.235	
		2685.0	26.1292	30.131	-64.932	-34.801	
	15	2503.5	25.8152	30.131	-66.815	-36.684	
		2593.0	26.4253	30.131	-66.637	-36.506	
		2682.5	25.5818	30.131	-66.815	-36.684	
	20	2506.0	26.1502	30.131	-66.519	-36.388	
		2593.0	25.7872	30.131	-67.124	-36.993	
		2680.0	26.0850	30.131	-66.864	-36.733	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 77 ~ 100.
2. Conducted Spurious Emissions was Tested QPSK Modulation, Resource Block Size 1 and Resource Block Offset 0
3. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
4. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131

8.5 CHANNEL EDGE

Band Width	Frequency (MHz)	Modulation	RB (Size/Offset)	2 495 MHz ~ 2 496 MHz	C.E ~ (C.E +1MHz)	2 490.5 MHz ~ 2 495 MHz	(C.E + 1 MHz) ~ (C.E + 5 MHz)	Below 2 490.5 MHz	(C.E + 5 MHz) ~ (C.E + X MHz)	Above (C.E + X MHz)
				Lower	Upper	Lower	Upper	Lower	Upper	Upper
5 MHz	2498.5	QPSK	25/0	-26.05	-26.31	-28.75	-26.58	-43.70	-38.40	-40.29
10 MHz	2501.0	QPSK	50/0	-28.02	-25.94	-31.64	-30.43	-38.25	-32.11	-39.88
15 MHz	2503.5	QPSK	75/0	-28.14	-27.03	-34.78	-30.13	-39.34	-32.56	-41.34
20 MHz	2506.0	QPSK	100/0	-27.29	-26.80	-33.26	-30.72	-37.11	-33.39	-41.96
Limit				-13.0	-10.0	-13.0	-10.0	-25.0	-13.0	-25.0

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	C.E ~ (C.E ± 1MHz)		(C.E ± 1 MHz) ~ (C.E ± 5 MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-24.66	-25.05	-17.83	-18.85
	2687.5	QPSK	25	0	-24.33	-25.09	-17.88	-19.33
10 MHz	2593.0	QPSK	50	0	-26.34	-27.05	-21.03	-21.81
	2685.0	QPSK	50	0	-25.37	-26.94	-21.93	-23.61
15 MHz	2593.0	QPSK	75	0	-26.03	-27.06	-21.04	-21.74
	2682.5	QPSK	75	0	-27.62	-28.50	-23.16	-24.94
20 MHz	2593.0	QPSK	100	0	-25.13	-26.65	-21.51	-23.01
	2680.0	QPSK	100	0	-27.32	-30.61	-24.63	-27.58
Limit					-10.0		-10.0	

Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	(C.E ± 5 MHz) ~ (C.E ± X MHz)		Above (C.E ± X MHz)	
					Lower	Upper	Lower	Upper
5 MHz	2593.0	QPSK	25	0	-34.92	-33.07	-35.50	-33.82
	2687.5	QPSK	25	0	-30.37	-29.80	-30.39	-30.47
10 MHz	2593.0	QPSK	50	0	-24.70	-25.24	-41.08	-36.90
	2685.0	QPSK	50	0	-26.93	-27.36	-33.60	-33.11
15 MHz	2593.0	QPSK	75	0	-24.48	-24.80	-42.94	-37.90
	2682.5	QPSK	75	0	-26.67	-27.40	-37.45	-35.98
20 MHz	2593.0	QPSK	100	0	-24.69	-25.62	-44.14	-38.08
	2680.0	QPSK	100	0	-27.61	-29.51	-39.38	-36.56
Limit					-13.0		-25.0	


Note:

1. C.E = Channel Edge
2. X = X is the greater of 6MHz or the actual emission bandwidth.
3. X = 6MHz(5MHz Bandwidth), 10MHz(10MHz Bandwidth), 15MHz(15MHz Bandwidth), 20MHz(20MHz Bandwidth)
4. Plots of the EUT's Channel Edge are shown Page 61 ~ 76.

8.6 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE


- MODE: LTE 41
- OPERATING FREQUENCY: 2498,500,000 Hz
- BANDWIDTH: 39675 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2498 500 013	0.0	0.000 000	0.000
100%		-30	2498 500 048	34.5	0.000 001	0.014
100%		-20	2498 499 988	-25.5	-0.000 001	-0.010
100%		-10	2498 500 059	45.7	0.000 002	0.018
100%		0	2498 500 064	50.6	0.000 002	0.020
100%		+10	2498 500 054	41.0	0.000 002	0.016
100%		+30	2498 500 050	37.0	0.000 001	0.015
100%		+40	2498 500 056	42.7	0.000 002	0.017
100%		+50	2498 500 067	53.4	0.000 002	0.021
85%		3.55	+20	2498 500 054	40.7	0.000 002

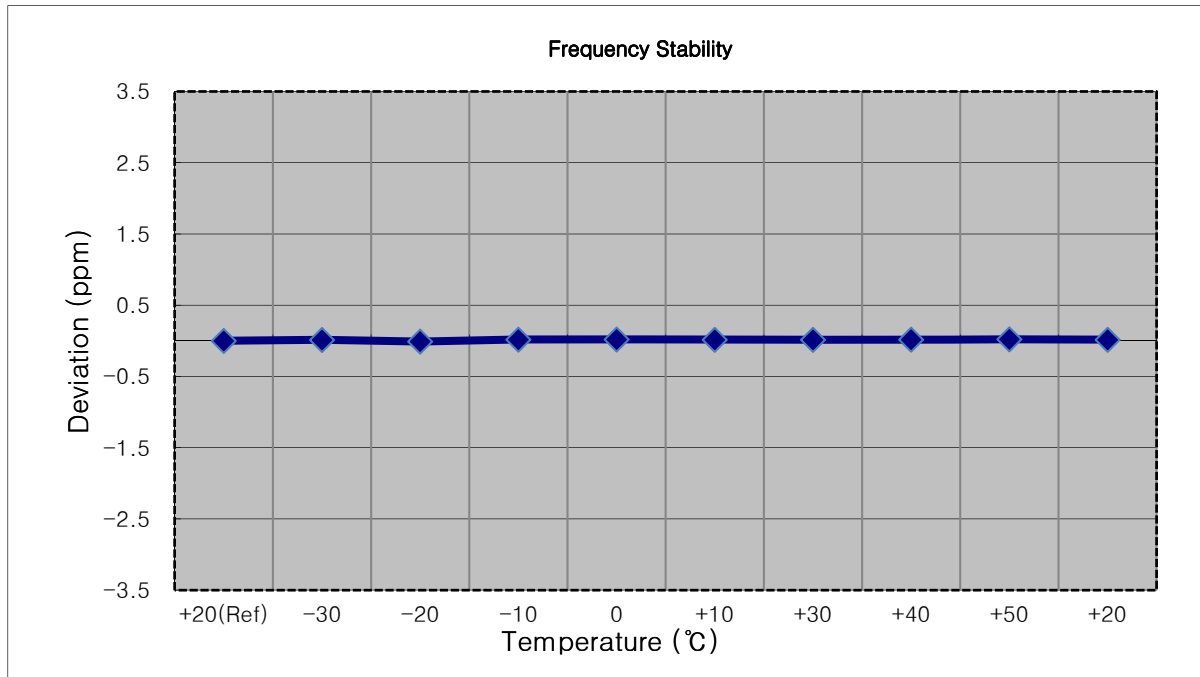


- MODE: LTE 41
- OPERATING FREQUENCY: 2501,000,000 Hz
- BANDWIDTH: 39700 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2501 000 010	0.0	0.000 000	0.000
100%		-30	2501 000 055	45.0	0.000 002	0.018
100%		-20	2501 000 057	47.0	0.000 002	0.019
100%		-10	2501 000 064	54.4	0.000 002	0.022
100%		0	2501 000 062	51.7	0.000 002	0.021
100%		+10	2501 000 058	47.7	0.000 002	0.019
100%		+30	2501 000 059	49.5	0.000 002	0.020
100%		+40	2501 000 059	49.1	0.000 002	0.020
100%		+50	2501 000 055	45.5	0.000 002	0.018
85%	3.55	+20	2501 000 054	44.1	0.000 002	0.018

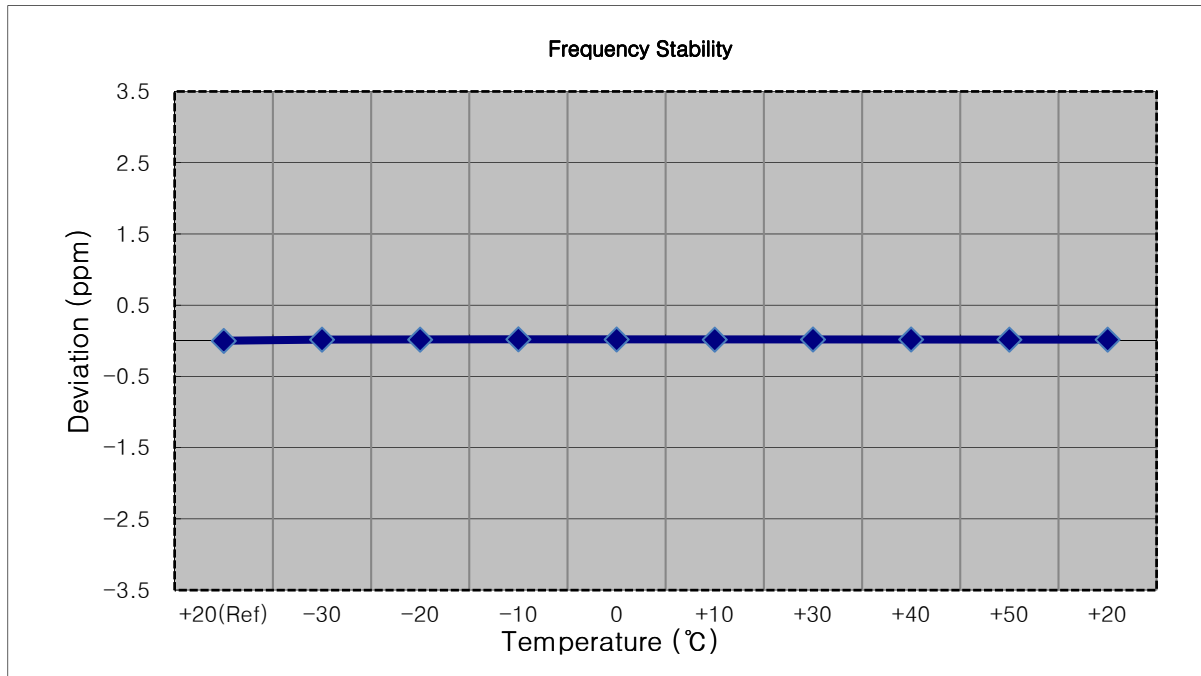


- MODE: LTE 41
- OPERATING FREQUENCY: 2503,500,000 Hz
- BANDWIDTH: 39725 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2503 500 006	0.0	0.000 000	0.000
100%		-30	2503 499 966	-40.0	-0.000 002	-0.016
100%		-20	2503 500 045	38.5	0.000 002	0.015
100%		-10	2503 499 979	-27.0	-0.000 001	-0.011
100%		0	2503 499 972	-33.8	-0.000 001	-0.014
100%		+10	2503 500 047	41.3	0.000 002	0.016
100%		+30	2503 500 044	37.8	0.000 002	0.015
100%		+40	2503 499 966	-39.9	-0.000 002	-0.016
100%		+50	2503 499 966	-40.5	-0.000 002	-0.016
85%	3.55	+20	2503 500 049	42.6	0.000 002	0.017

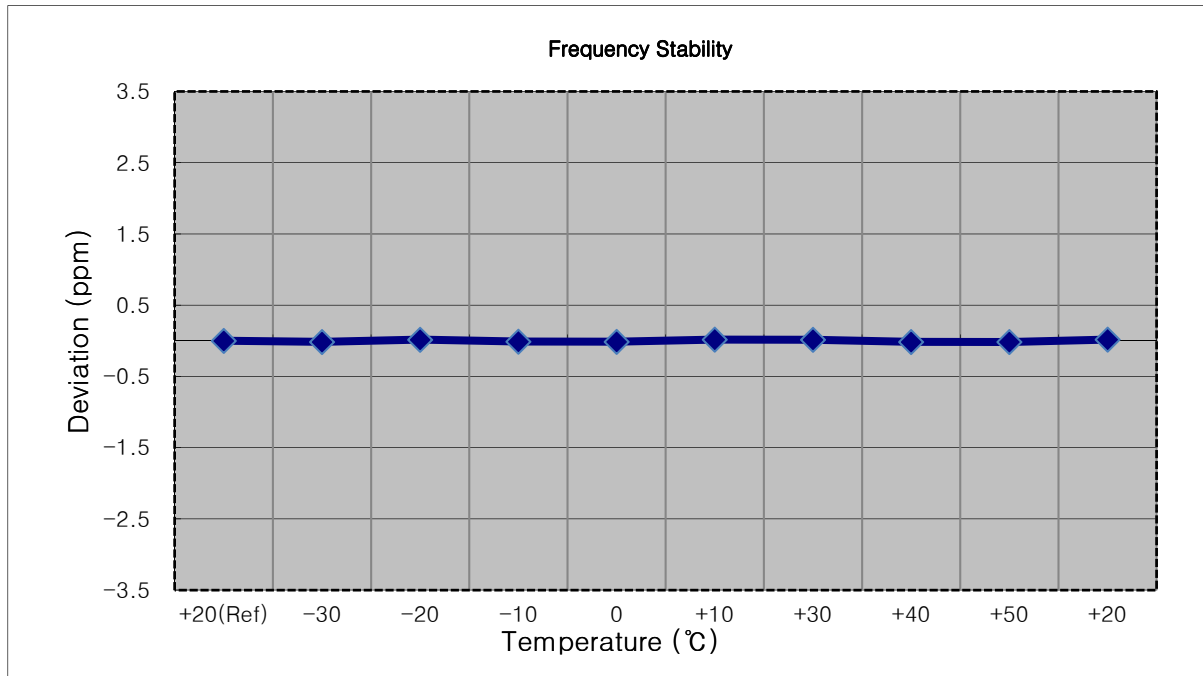


- MODE: LTE 41
- OPERATING FREQUENCY: 2506, 00,000 Hz
- BANDWIDTH: 39750 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2506 000 007	0.0	0.000 000	0.000
100%		-30	2506 000 057	49.4	0.000 002	0.020
100%		-20	2506 000 063	55.3	0.000 002	0.022
100%		-10	2505 999 974	-33.8	-0.000 001	-0.013
100%		0	2505 999 983	-24.0	-0.000 001	-0.010
100%		+10	2506 000 048	40.3	0.000 002	0.016
100%		+30	2505 999 970	-37.2	-0.000 001	-0.015
100%		+40	2505 999 978	-29.2	-0.000 001	-0.012
100%		+50	2506 000 064	56.8	0.000 002	0.023
85%	3.55	+20	2506 000 060	52.1	0.000 002	0.021

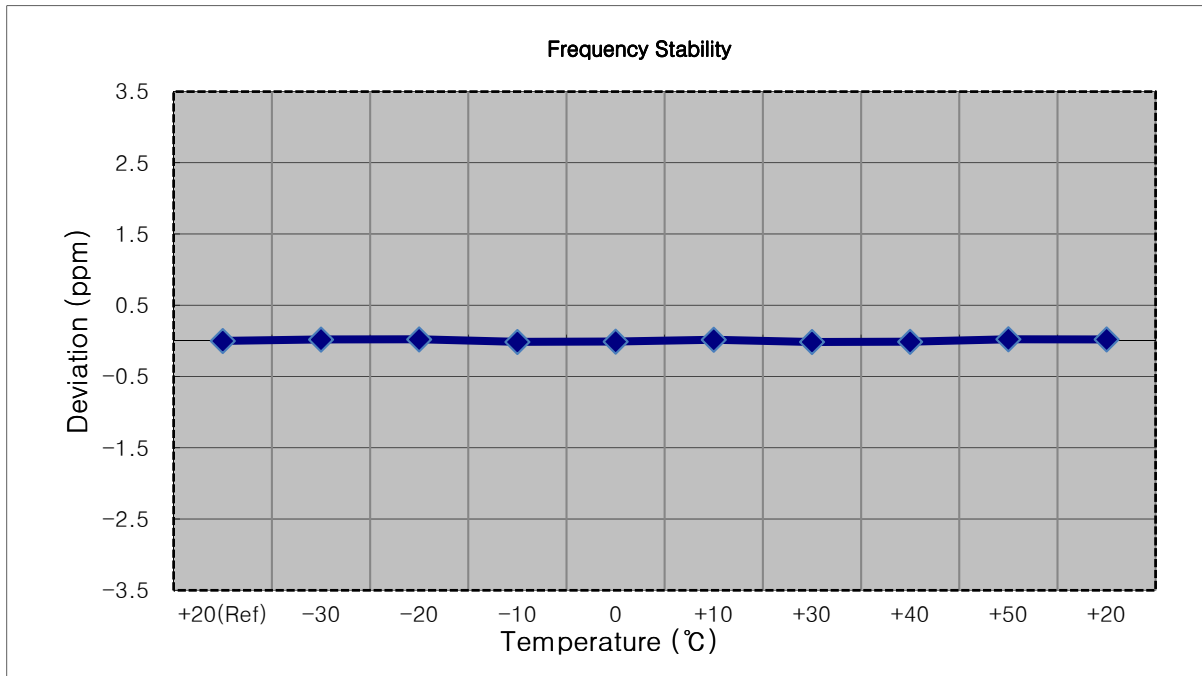


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 020	0.0	0.000 000	0.000
100%		-30	2593 000 076	56.5	0.000 002	0.022
100%		-20	2593 000 069	49.6	0.000 002	0.019
100%		-10	2593 000 067	47.6	0.000 002	0.018
100%		0	2593 000 049	29.2	0.000 001	0.011
100%		+10	2593 000 069	49.0	0.000 002	0.019
100%		+30	2593 000 039	19.5	0.000 001	0.008
100%		+40	2593 000 060	40.4	0.000 002	0.016
100%		+50	2593 000 060	39.8	0.000 002	0.015
85%		3.55	+20	2593 000 063	42.9	0.000 002

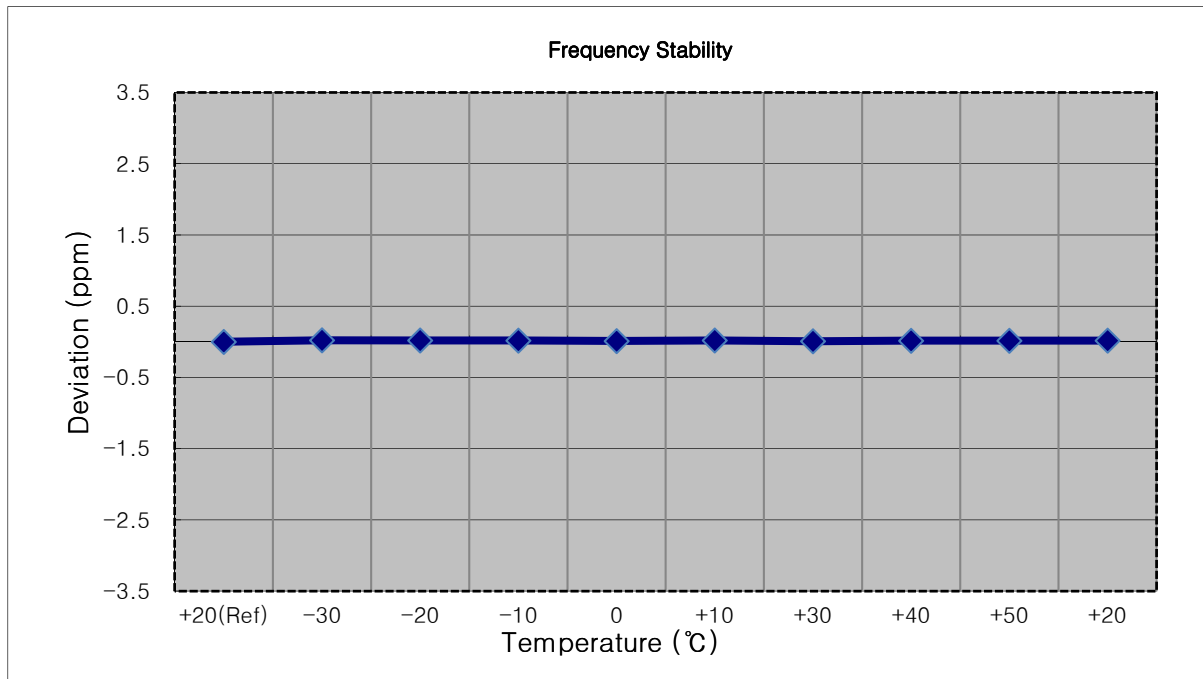


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 057	0.0	0.000 000	0.000
100%		-30	2593 000 112	54.3	0.000 002	0.021
100%		-20	2593 000 032	-25.6	-0.000 001	-0.010
100%		-10	2593 000 110	52.7	0.000 002	0.020
100%		0	2593 000 117	59.5	0.000 002	0.023
100%		+10	2593 000 088	31.1	0.000 001	0.012
100%		+30	2593 000 107	49.5	0.000 002	0.019
100%		+40	2593 000 094	36.3	0.000 001	0.014
100%		+50	2593 000 112	55.2	0.000 002	0.021
85%	3.55	+20	2593 000 106	48.7	0.000 002	0.019

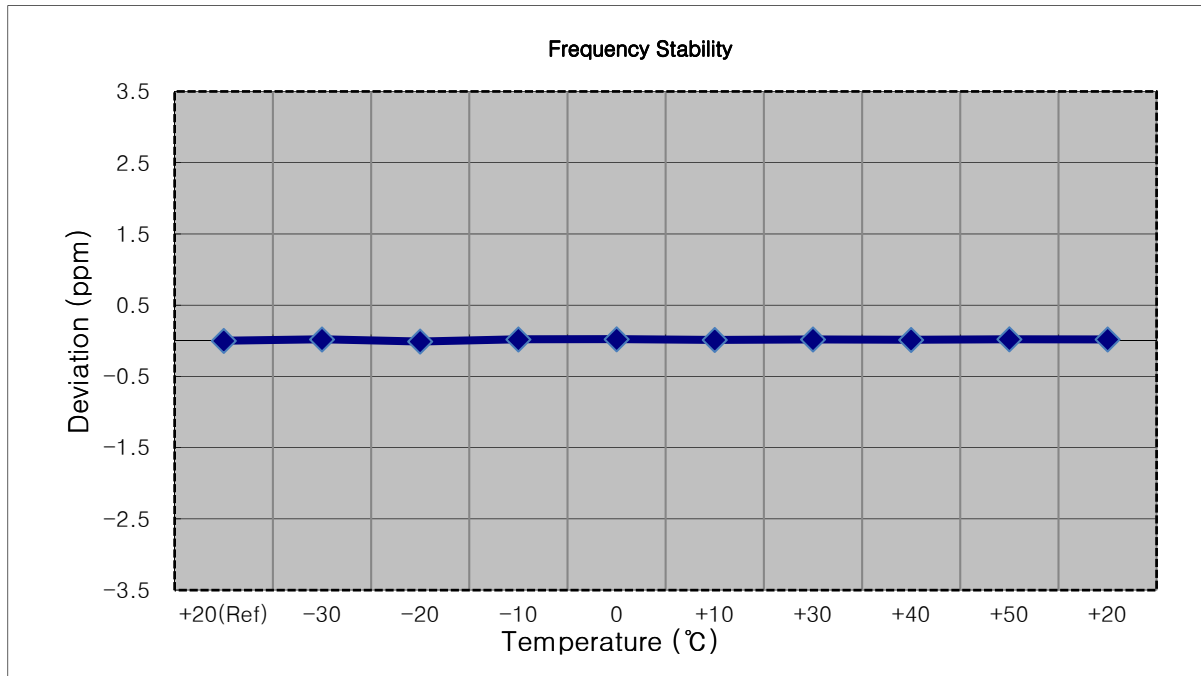


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 048	0.0	0.000 000	0.000
100%		-30	2593 000 093	45.6	0.000 002	0.018
100%		-20	2593 000 090	42.7	0.000 002	0.016
100%		-10	2593 000 102	54.1	0.000 002	0.021
100%		0	2593 000 089	41.9	0.000 002	0.016
100%		+10	2593 000 089	41.0	0.000 002	0.016
100%		+30	2593 000 103	55.0	0.000 002	0.021
100%		+40	2593 000 092	44.1	0.000 002	0.017
100%		+50	2593 000 101	53.4	0.000 002	0.021
85%	3.55	+20	2593 000 101	53.1	0.000 002	0.020

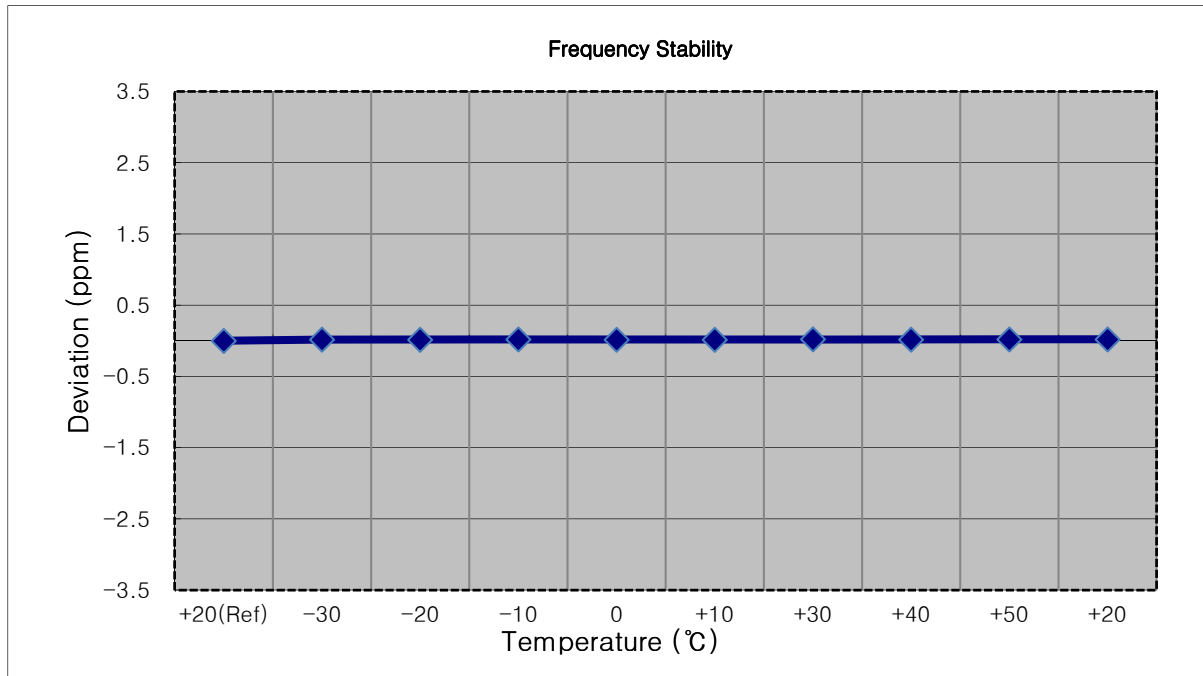


- MODE: LTE 41
- OPERATING FREQUENCY: 2593,000,000 Hz
- BANDWIDTH: 40620 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2593 000 046	0.0	0.000 000	0.000
100%		-30	2593 000 106	59.5	0.000 002	0.023
100%		-20	2593 000 103	56.9	0.000 002	0.022
100%		-10	2593 000 017	-28.7	-0.000 001	-0.011
100%		0	2593 000 101	55.0	0.000 002	0.021
100%		+10	2593 000 092	46.2	0.000 002	0.018
100%		+30	2593 000 090	43.8	0.000 002	0.017
100%		+40	2593 000 083	36.7	0.000 001	0.014
100%		+50	2593 000 018	-27.6	-0.000 001	-0.011
85%	3.55	+20	2593 000 103	57.1	0.000 002	0.022

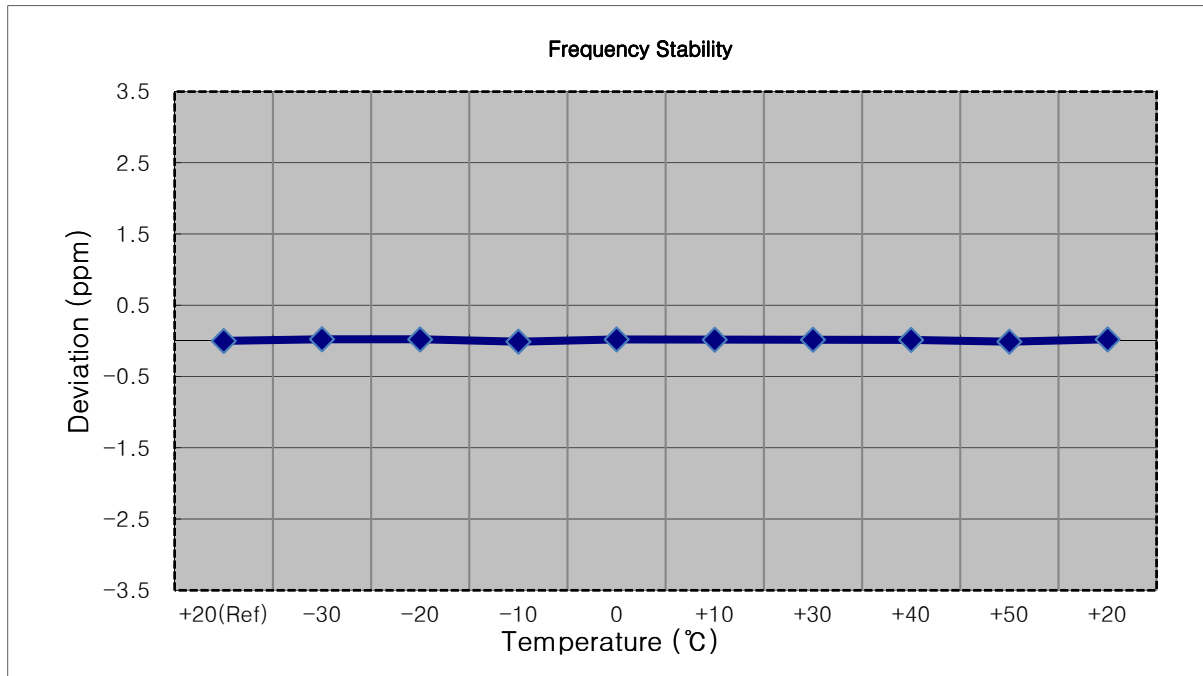


- MODE: LTE 41
- OPERATING FREQUENCY: 2687,500,000 Hz
- BANDWIDTH: 41565 (5 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2687 499 996	0.0	0.000 000	0.000
100%		-30	2687 499 966	-30.8	-0.000 001	-0.011
100%		-20	2687 500 020	23.3	0.000 001	0.009
100%		-10	2687 500 024	27.9	0.000 001	0.010
100%		0	2687 499 971	-25.4	-0.000 001	-0.009
100%		+10	2687 500 032	35.8	0.000 001	0.013
100%		+30	2687 500 027	30.8	0.000 001	0.011
100%		+40	2687 500 020	23.9	0.000 001	0.009
100%		+50	2687 500 019	22.7	0.000 001	0.008
85%	3.55	+20	2687 500 035	38.1	0.000 001	0.014

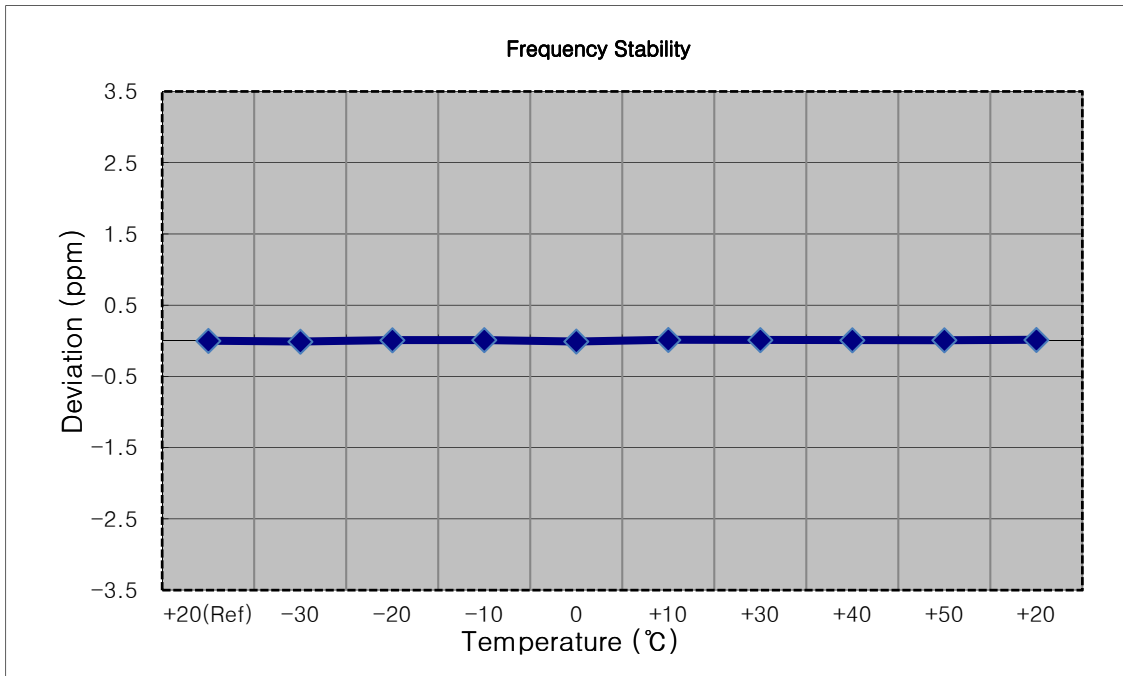


- MODE: LTE 41
- OPERATING FREQUENCY: 2685,000,000 Hz
- BANDWIDTH: 41540 (10 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2684 999 986	0.0	0.000 000	0.000
100%		-30	2685 000 011	24.5	0.000 001	0.009
100%		-20	2685 000 011	24.9	0.000 001	0.009
100%		-10	2685 000 022	36.0	0.000 001	0.013
100%		0	2684 999 962	-24.2	-0.000 001	-0.009
100%		+10	2685 000 016	29.5	0.000 001	0.011
100%		+30	2685 000 016	29.3	0.000 001	0.011
100%		+40	2685 000 016	29.8	0.000 001	0.011
100%		+50	2684 999 968	-18.8	-0.000 001	-0.007
85%	3.55	+20	2685 000 015	28.9	0.000 001	0.011

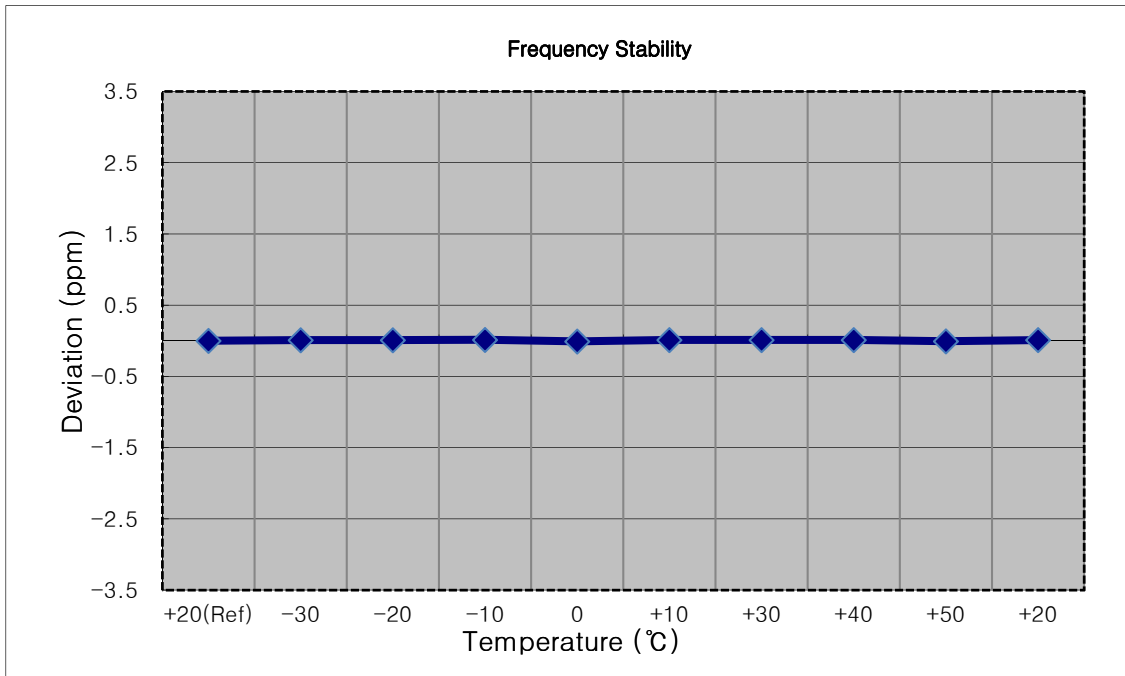


- MODE: LTE 41
- OPERATING FREQUENCY: 2682,500,000 Hz
- BANDWIDTH: 41515 (15 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2682 500 005	0.0	0.000 000	0.000
100%		-30	2682 500 032	26.8	0.000 001	0.010
100%		-20	2682 499 990	-14.9	-0.000 001	-0.006
100%		-10	2682 499 977	-28.3	-0.000 001	-0.011
100%		0	2682 499 974	-30.5	-0.000 001	-0.011
100%		+10	2682 499 980	-24.7	-0.000 001	-0.009
100%		+30	2682 499 986	-18.5	-0.000 001	-0.007
100%		+40	2682 499 981	-23.6	-0.000 001	-0.009
100%		+50	2682 500 029	24.3	0.000 001	0.009
85%	3.55	+20	2682 499 983	-22.2	-0.000 001	-0.008

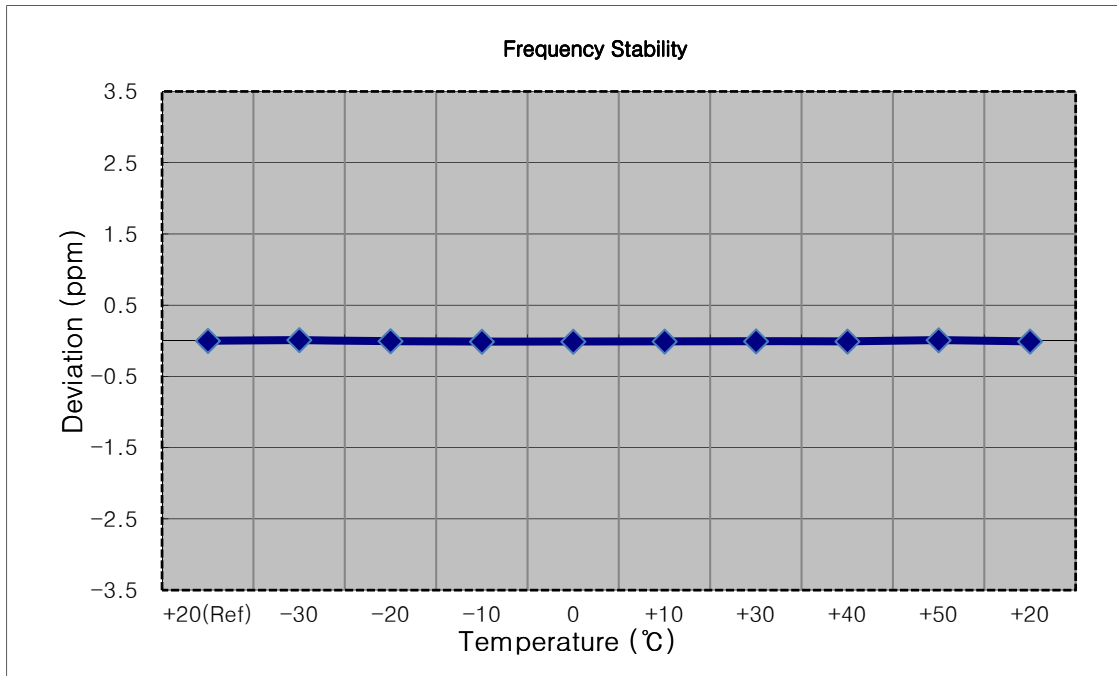

- MODE: LTE 41
- OPERATING FREQUENCY: 2680,000,000 Hz
- BANDWIDTH: 41490 (20 MHz)
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.85	+20(Ref)	2680 000 010	0.0	0.000 000	0.000
100%		-30	2680 000 024	14.1	0.000 001	0.005
100%		-20	2680 000 046	36.2	0.000 001	0.014
100%		-10	2680 000 043	33.6	0.000 001	0.013
100%		0	2680 000 035	24.8	0.000 001	0.009
100%		+10	2679 999 995	-15.0	-0.000 001	-0.006
100%		+30	2680 000 038	27.8	0.000 001	0.010
100%		+40	2680 000 040	30.4	0.000 001	0.011
100%		+50	2680 000 040	30.0	0.000 001	0.011
85%	3.55	+20	2680 000 028	18.7	0.000 001	0.007

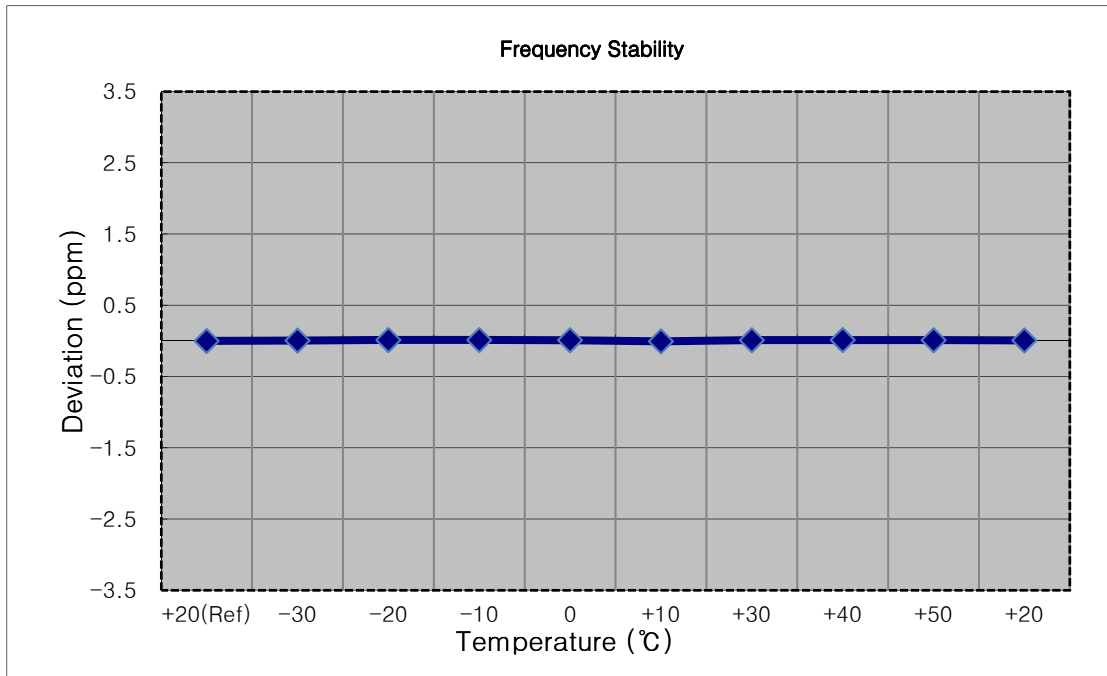

8.7 GEO-LOCATION MECHANISM

The device uses a geo-location mechanism based on the cellular MCC codes in order to only enable certain LTE bands when the device is not in the USA.

The validation of this mechanism is provided below. The device was configured for cellular communications to a test set and the MCC code was adjusted on the test set between the US MCC and then an MCC code valid for a country where the LTE band is supported.

Band	MCC = USA	MCC = non US
7	Did not connect	Connected (Canada)
38	Did not connect	Connected (China)
40	Did not connect	Connected (China)

The verification tests confirmed the operational of the geo-location mechanism.

Verification test

Connected(LTE B7)
(MCC = Canada)

The screenshot displays the 'Connected(LTE B7)' status with '(MCC = Canada)'. The interface includes a top status bar with the date '2018/05/23 08:57', a 'Connected' indicator, and phone status 'Phone-2 ---' and 'Phone-1 LTE'. Below this are tabs for 'Parameter', 'Fundamental', and 'UE Report'. The main area is titled 'Measuring' and shows 'UE Power : 23.6 dBm' and '(Meas. Count : 1/ 1)'. A 'Modulation Analysis' section is visible with a 'View' button. A table of measurement data is shown below, followed by 'Call Processing Parameter' details including Base Station Identity (Cell ID, MCC, MNC, TAC) and Mobile Station Identity (IMSI, Paging IMSI, C-RNTI). A right-hand menu lists various measurement categories like Common, Physical Channel, Call Processing, TX Measurement Setup, RX Measurement Setup, and Fundamental Measurement.

Parameter	Avg.	Max.	Min.	Limit
Carrier Frequency	2535.000000 MHz			
Carrier Frequency Error	0.0003	0.0003	0.0003	kHz
EVM	3.05	3.05	3.05	%(rms)
Reference Signal EVM	2.46	2.46	2.46	%(rms)
Peak Vector Error	10.04	10.04	10.04	%
Phase Error	1.23	1.23	1.23	deg. (rms)

Call Processing Parameter

Base Station Identity

Cell ID: 0

MCC: 302

MNC: 220

TAC: 0001 H

Mobile Station Identity

IMSI: 001010123456789

Paging IMSI: Auto

C-RNTI: AAAA H

Connected(LTE B38)
(MCC = China)

2018/05/23 08:56 Connected Phone-2 --- Phone-1 LTE

<Fundamental Measurement> Output Main Continuous

Parameter Fundamental UE Report Band Cal.

Measuring UE Power : 23.7 dBm

Modulation Analysis View (Meas. Count : 1/ 1)

Carrier Frequency 2595.000001 MHz

	Avg.	Max.	Min.	Limit
Carrier Frequency Error	0.0006	0.0006	0.0006	kHz
EVM	2.30	2.30	2.30	%(rms)
Reference Signal EVM	1.93	1.93	1.93	%(rms)
Peak Vector Error	6.28	6.28	6.28	%
Phase Error	0.66	0.66	0.66	deg. (rms)

Call Processing Parameter

Base Station Identity

Cell ID 0

MCC 460

MNC 00

TAC 0001 H

Mobile Station Identity

IMSI 001010123456789

Paging IMSI Auto

C-RNTI AAAA H

1 | 2 | 3 | 4

Connected(LTE B40)
(MCC = China)

2018/05/23 08:55 Connected Phone-2 Phone-1
 <Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : 23.6 dBm

Modulation Analysis View (Meas. Count : 1/ 1)

Carrier Frequency Avg. 2350.000005 MHz

	Avg.	Max.	Min.	Limit
Carrier Frequency Error	0.0050	0.0050	0.0050	kHz
EVM	3.89	3.89	3.89	%(rms)
Reference Signal EVM	2.25	2.25	2.25	%(rms)
Peak Vector Error	17.95	17.95	17.95	%
Phase Error	1.01	1.01	1.01	deg. (rms)

0.0 dB

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	460
MNC	00
TAC	0001 H

Mobile Station Identity

IMSI 001010123456789

Parameter

Common

Physical Channel

Call Processing

TX Measurement Setup

RX Measurement Setup

Fundamental Measurement

1 | 2 | 3 | 4

**Did not connect(LTE B7)
(MCC = USA)**

2018/05/23 08:58 Idle Phone-2 --- Phone-1 LTE

<Fundamental Measurement> Output Main Continuous

Parameter Fundamental UE Report Band Cal

Measuring UE Power : -27.1 dBm

Power Measurement (Meas. Count : 1/ 1)

	Avg.	Max.	Min.	Limit
TX Power	-42.72	-42.72	-42.72	dBm 20.3 to 25.7 dBm
Channel Power	-43.18	-43.18	-43.18	dBm

0.0 dB

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	311
MNC	01
TAC	0001 H

Mobile Station Identity

IMSI	001010123456789
------	-----------------

1 | 2 | 3 | 4

Did not connect(LTE B38)
(MCC = USA)

2018/05/23 08:59 Idle Phone-2 Phone-1
 <Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report Band Cal.

Measuring UE Power : -27.4 dBm

Power Measurement (Meas. Count : 1/ 1)

	Avg.	Max.	Min.	Limit
TX Power	-43.03	-43.03	-43.03	dBm 20.3 to 25.7 dBm
Channel Power	-43.48	-43.48	-43.48	dBm

Call Processing Parameter

Base Station Identity

Cell ID 0

MCC 311

MNC 01

TAC 0001 H

Mobile Station Identity

IMSI 001010123456789

Paging IMSI Auto

C-RNTI AAAA H

1 2 3 4

Did not connect(LTE B40)
(MCC = USA)

2018/05/23 09:00 Idle Phone-2 Phone-1
 <Fundamental Measurement> Output Main Continuous --- LTE

Parameter Fundamental UE Report Band Cal

Measuring UE Power : -27.1 dBm

Power Measurement (Meas. Count : 1/ 1)

	Avg.	Max.	Min.	Limit
TX Power	-42.68	-42.68	-42.68	20.3 to 25.7 dBm
Channel Power	-43.13	-43.13	-43.13	

0.0 dB

Call Processing Parameter

Base Station Identity

Cell ID	0
MCC	311
MNC	01
TAC	0001 H

Mobile Station Identity


IMSI 001010123456789

Parameter
 Common
 Physical Channel
 Call Processing
 TX Measurement Setup
 RX Measurement Setup
 Fundamental Measurement


1 | 2 | 3 | 4

9. TEST PLOTS


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 QPSK RB 25)

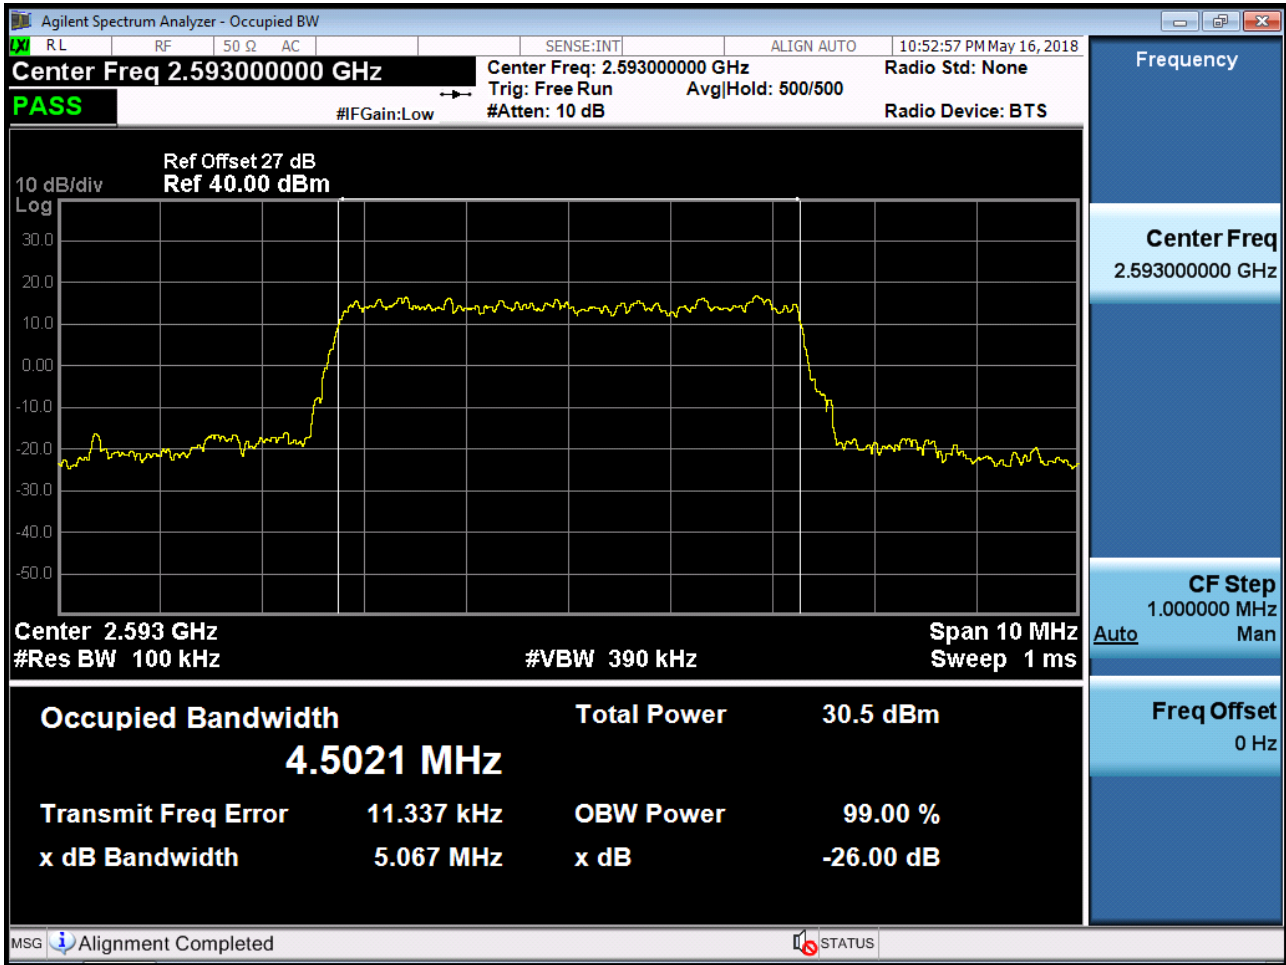


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 16-QAM RB 25)

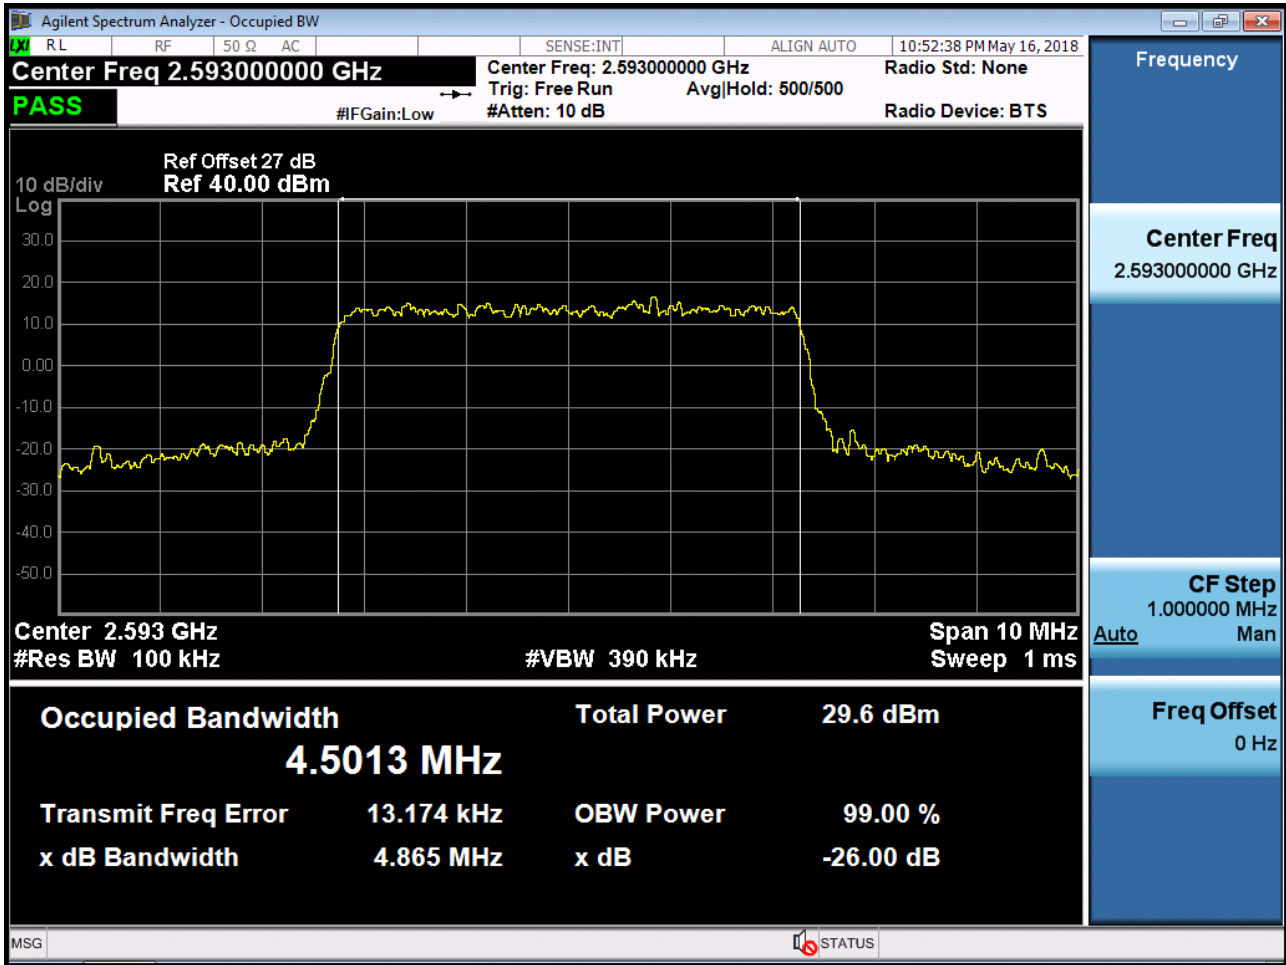


BAND 41. Occupied Bandwidth Plot (5 MHz Ch.40620 64-QAM RB 25)

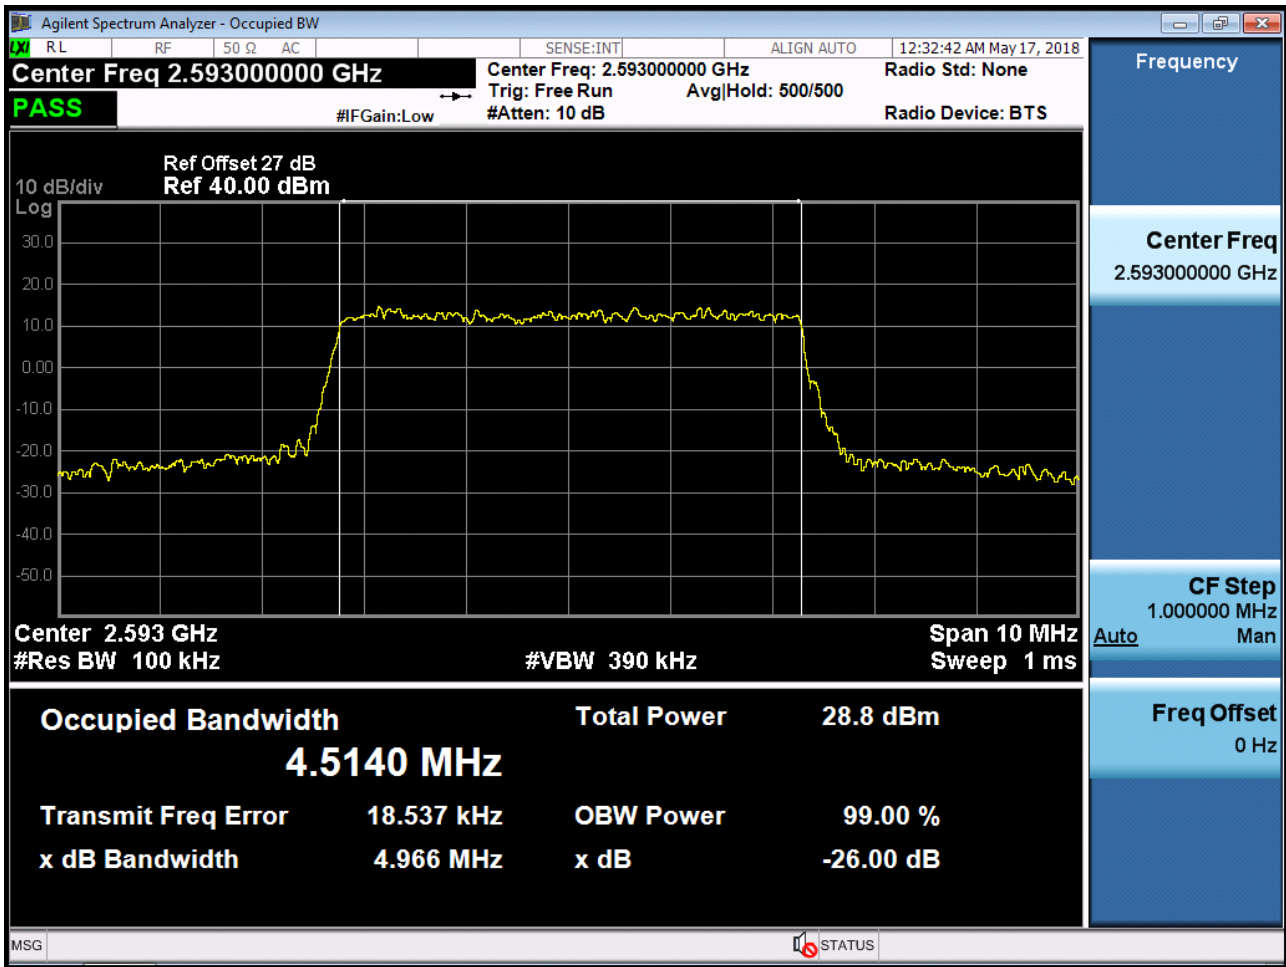


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 QPSK RB 50)

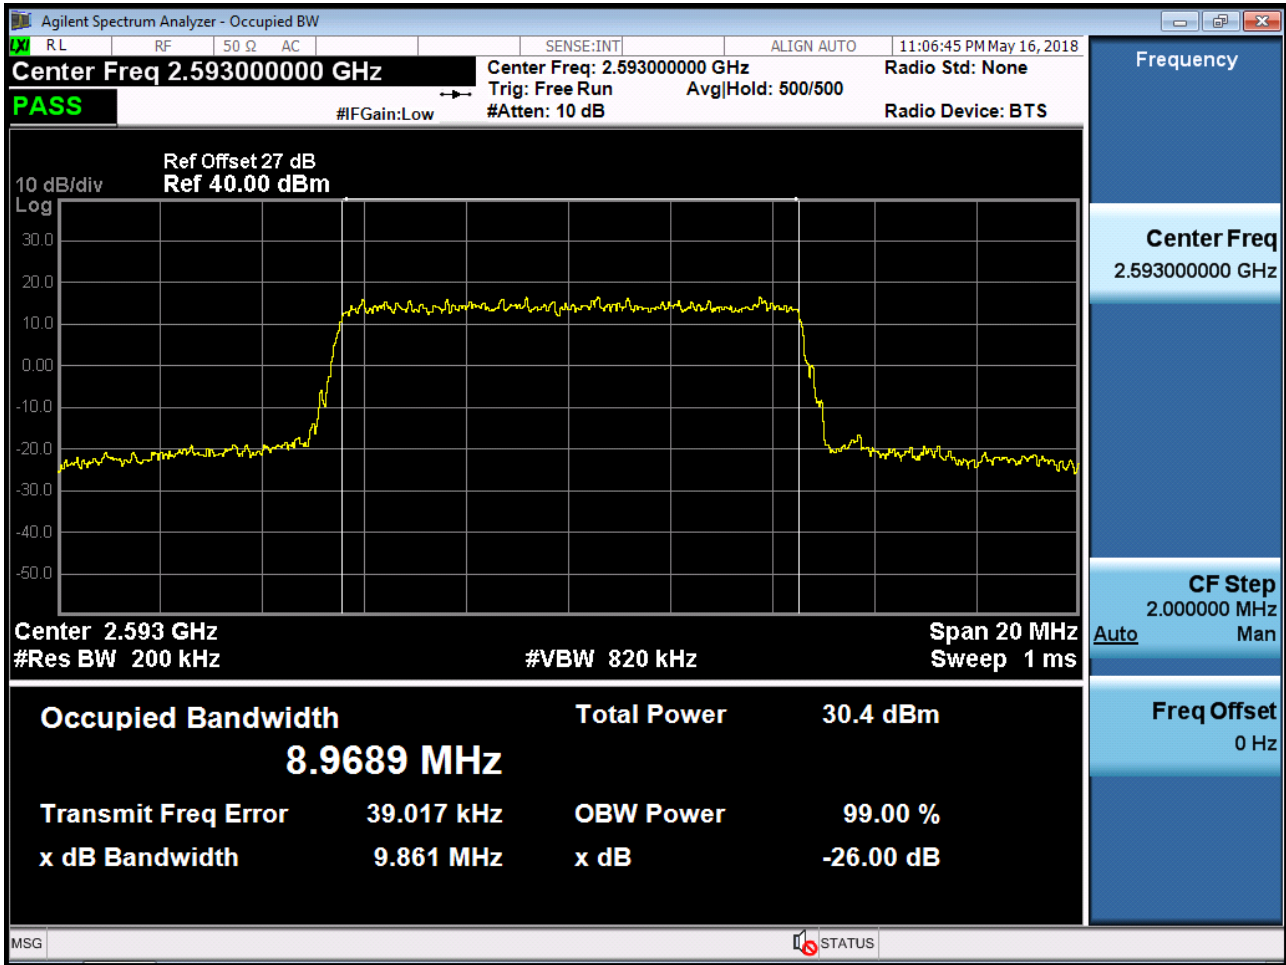


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 16-QAM RB 50)

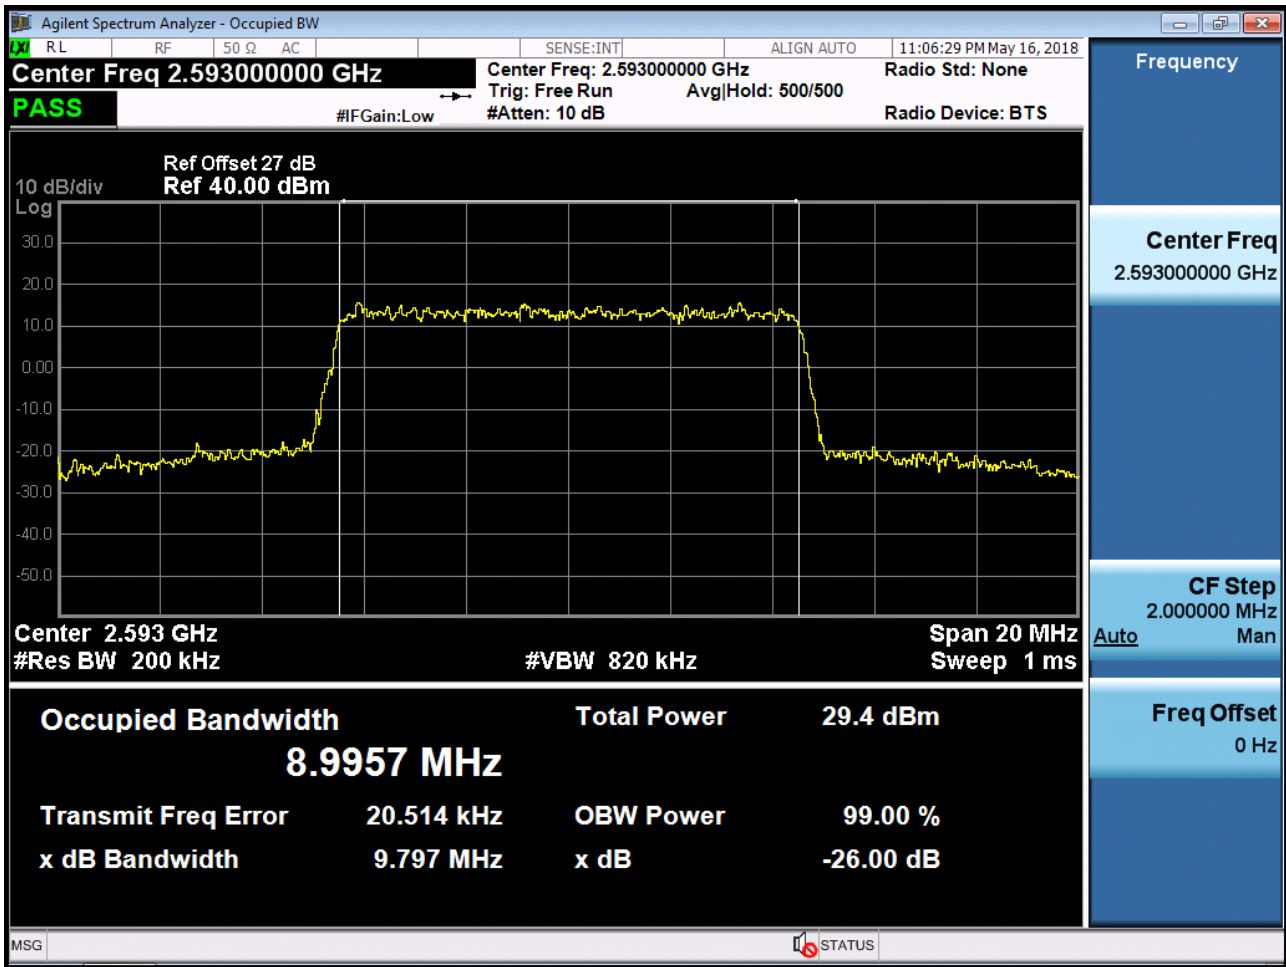


BAND 41. Occupied Bandwidth Plot (10 MHz Ch.40620 64-QAM RB 50)

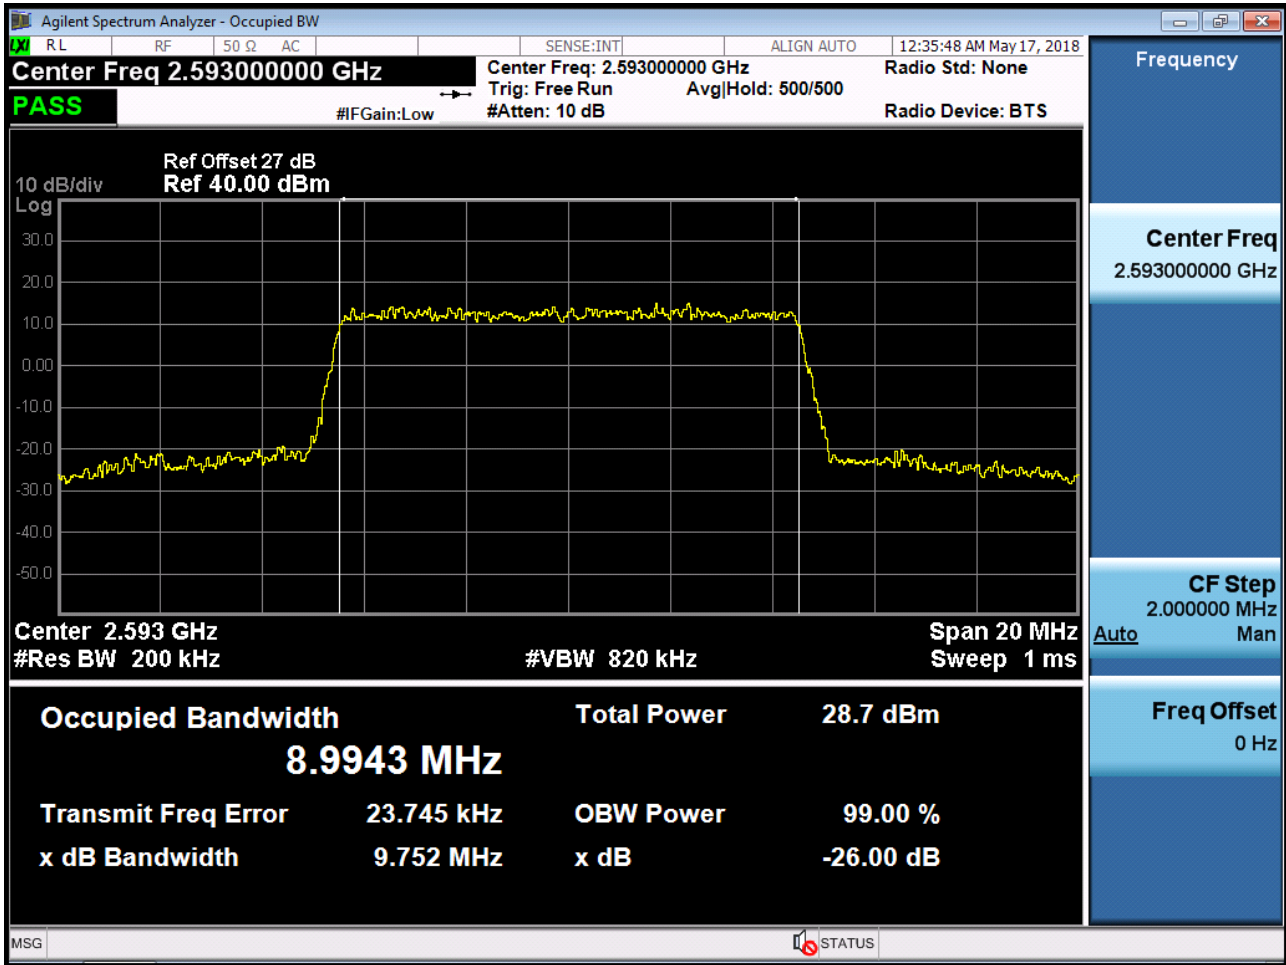


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 QPSK RB 75)

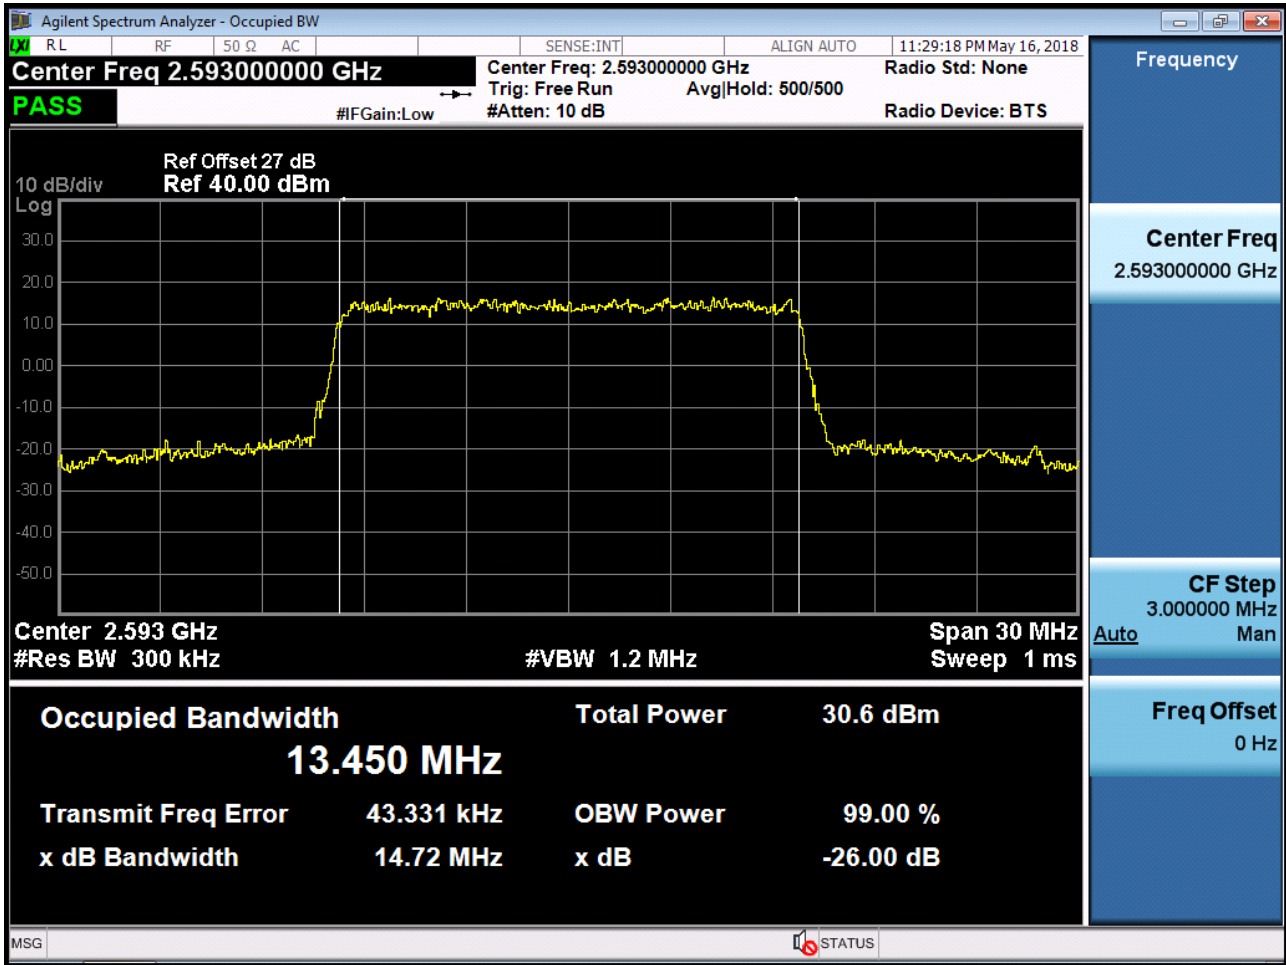


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 16-QAM RB 75)

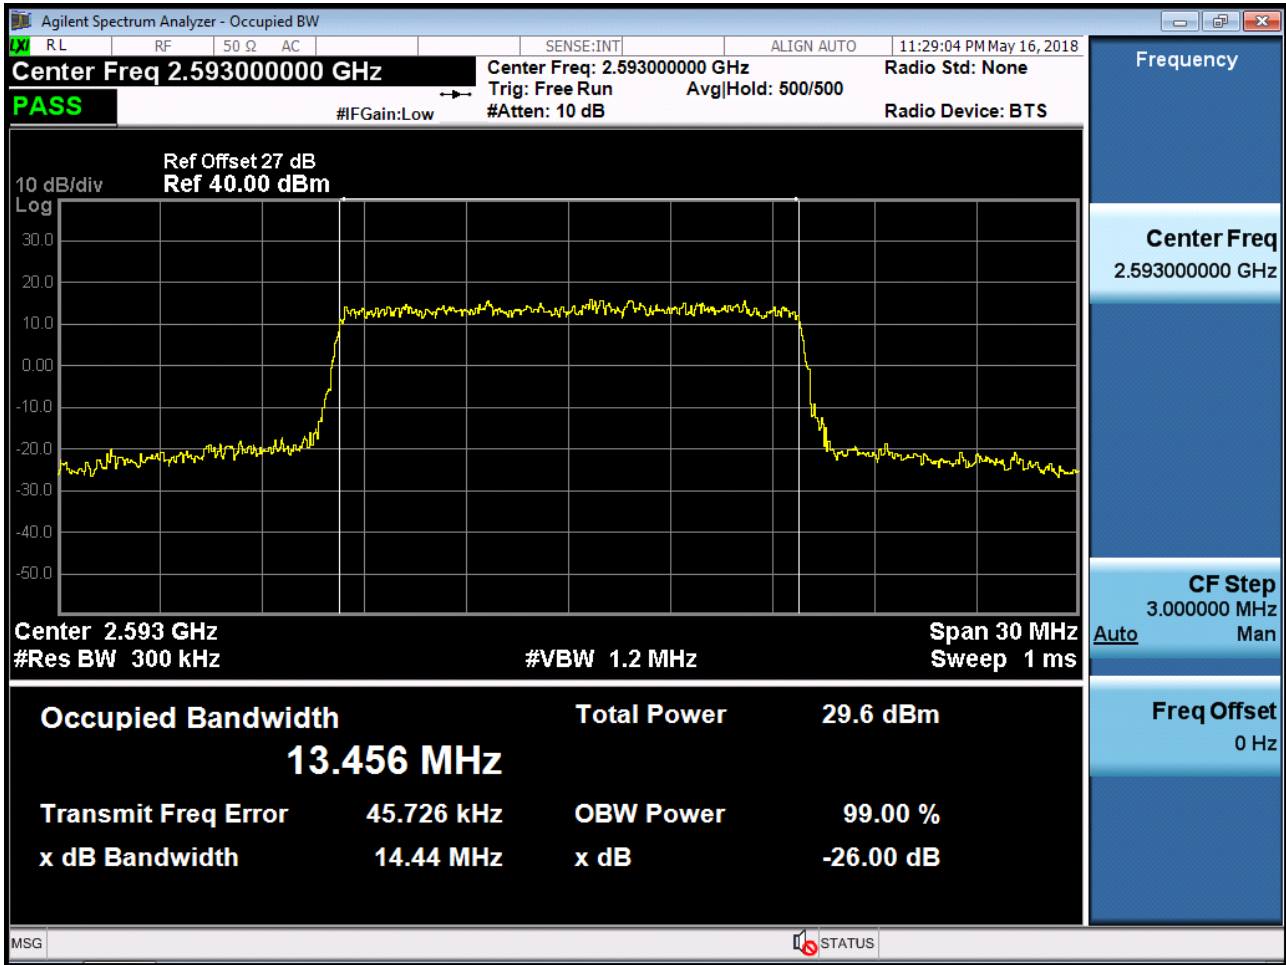


BAND 41. Occupied Bandwidth Plot (15 MHz Ch.40620 64-QAM RB 75)

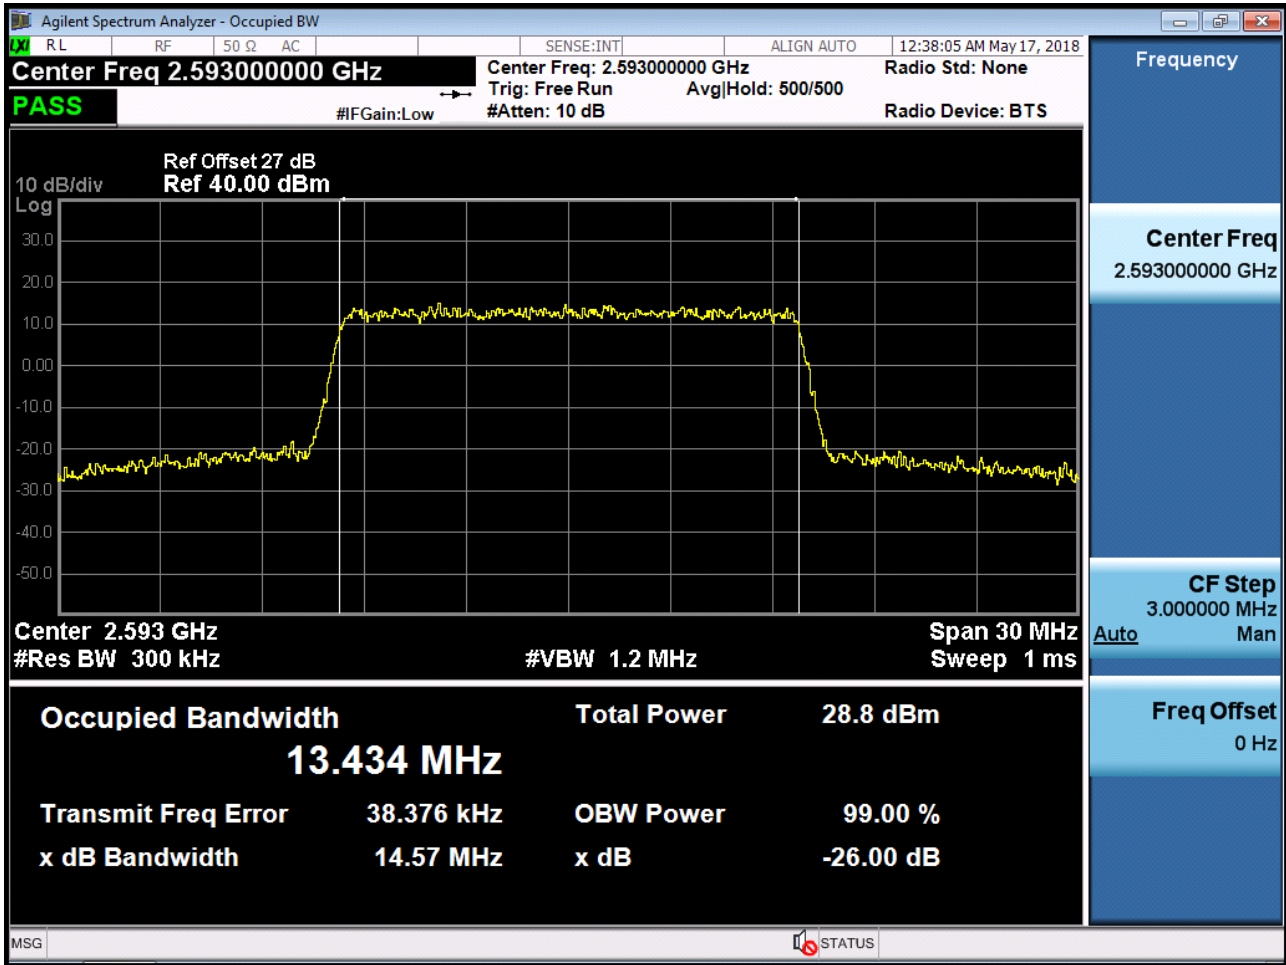


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 QPSK RB 100)

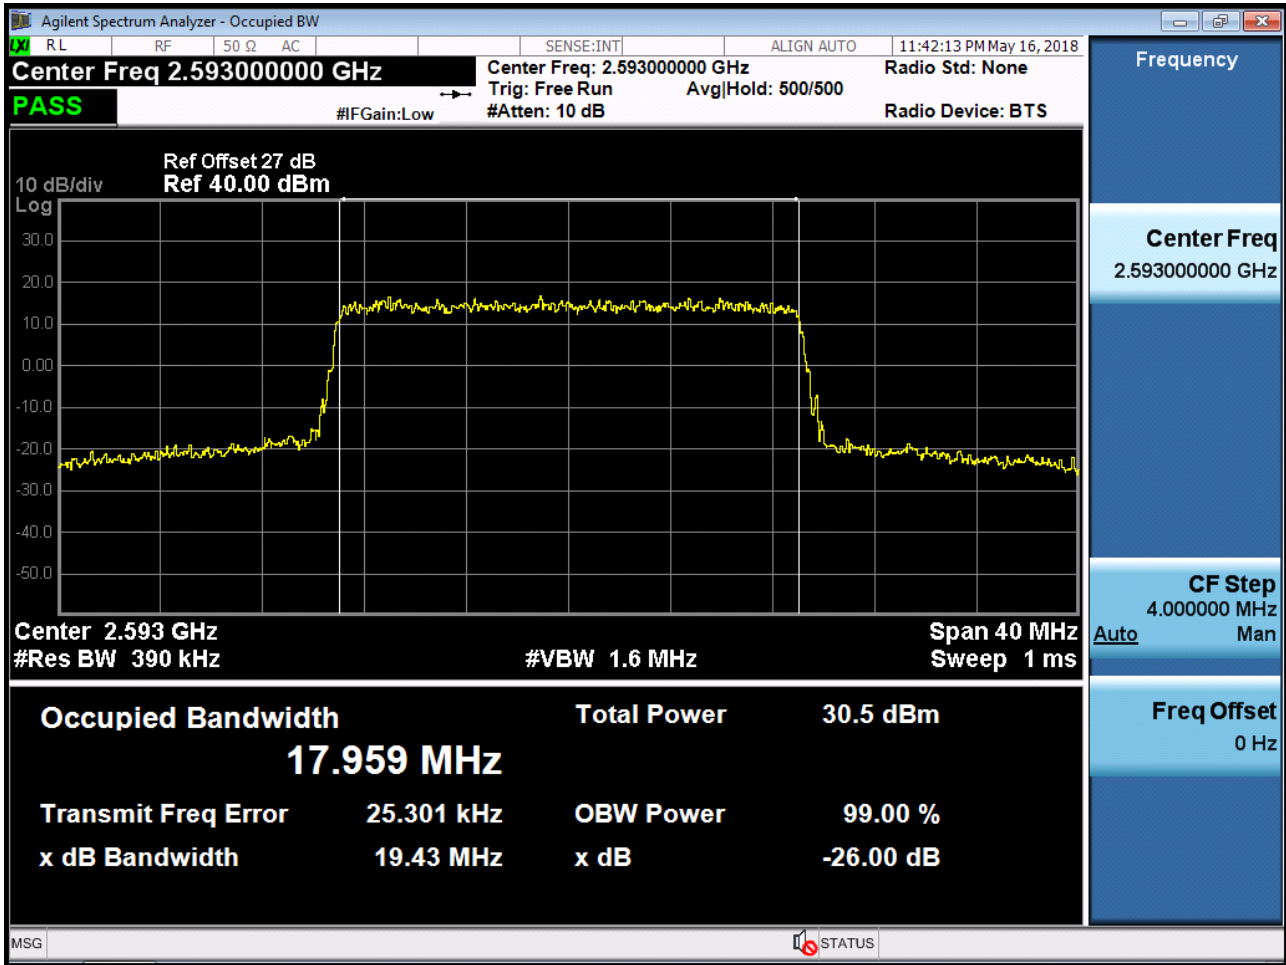


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 16-QAM RB 100)

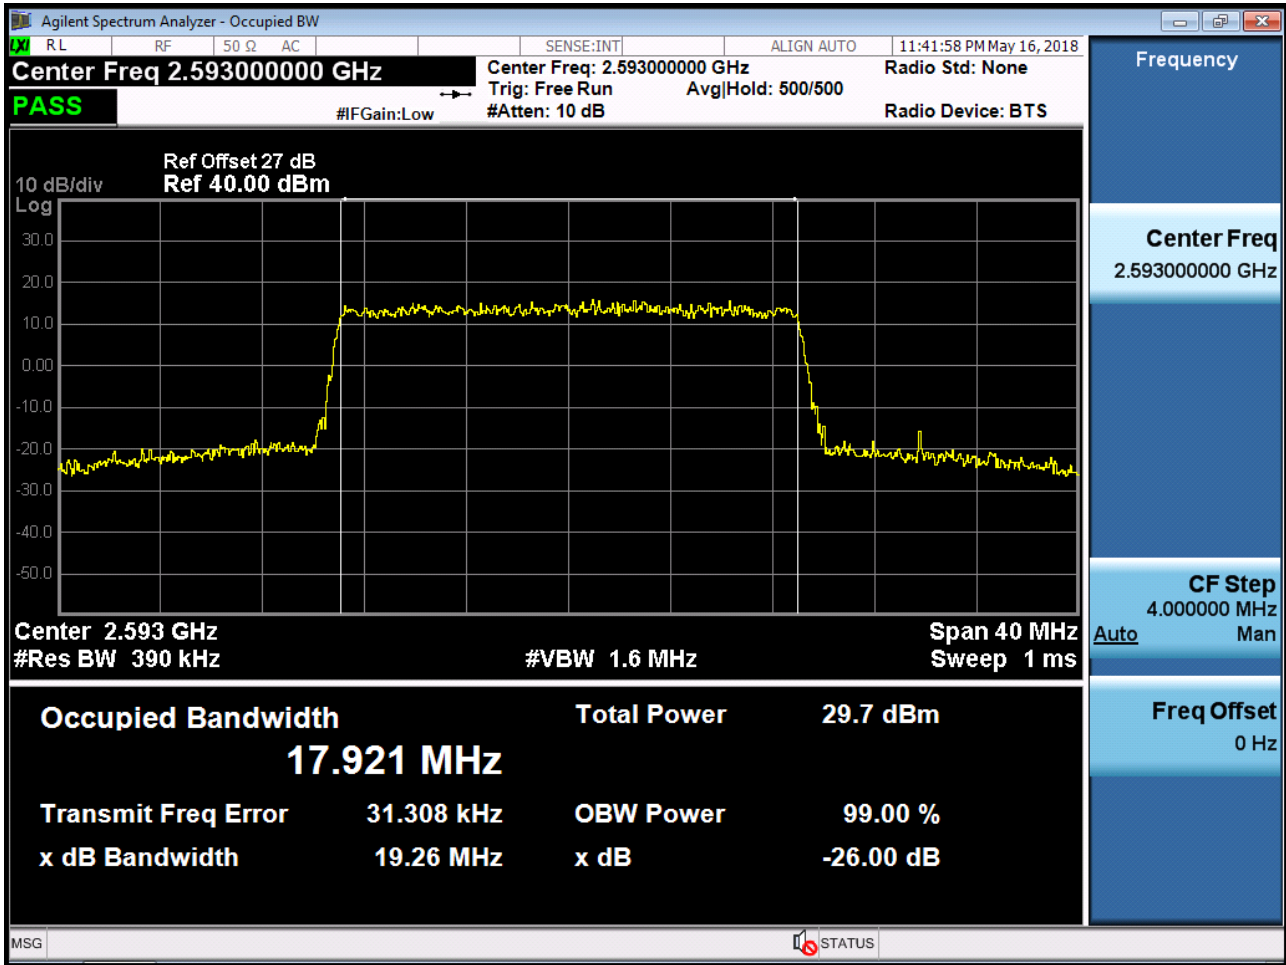


BAND 41. Occupied Bandwidth Plot (20 MHz Ch.40620 64-QAM RB 100)

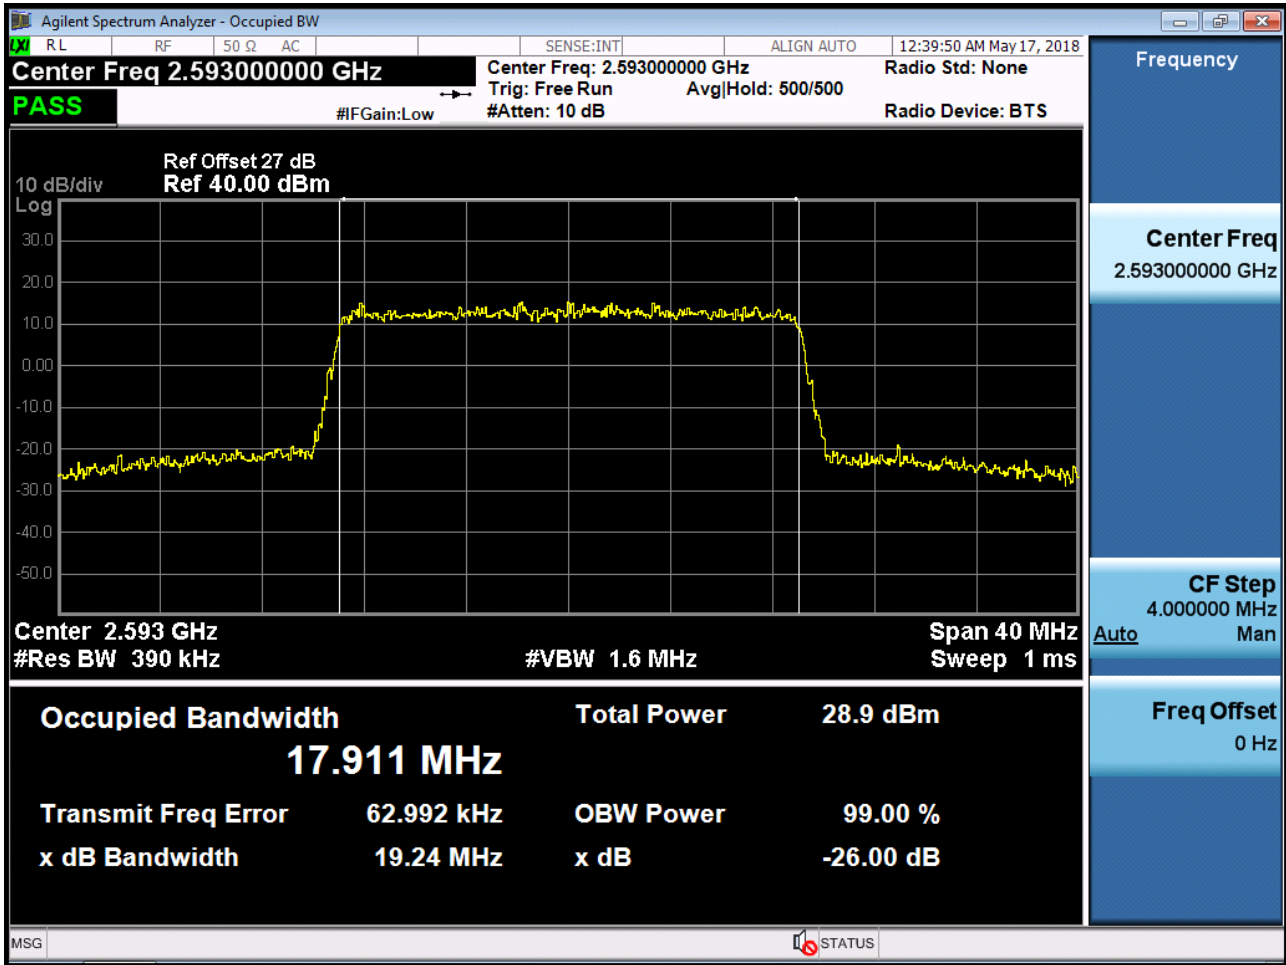


BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-1

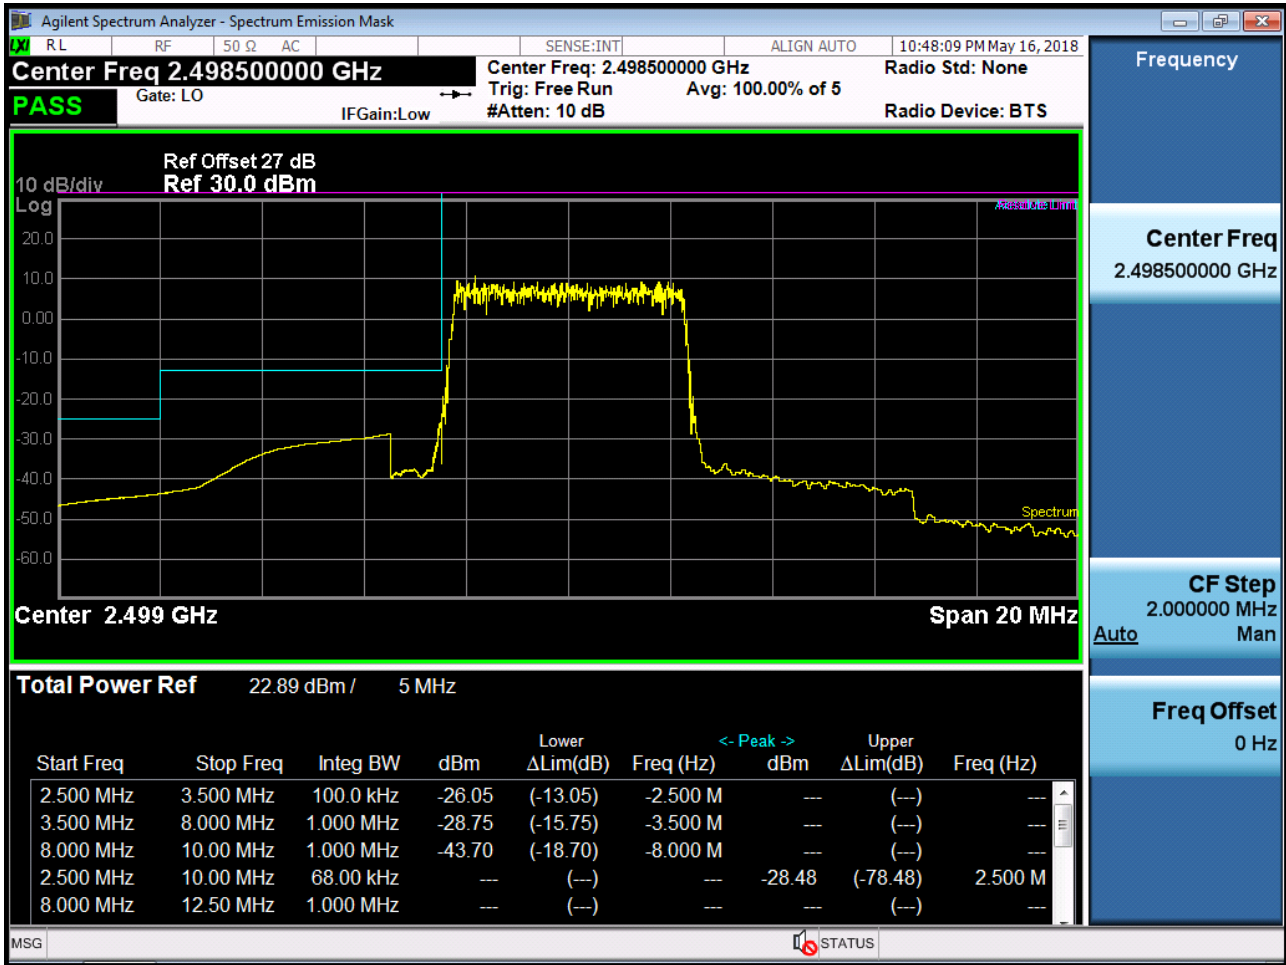


BAND 41. Low Channel Edge Plot (5 MHz Ch.39675 QPSK RB 25)-2

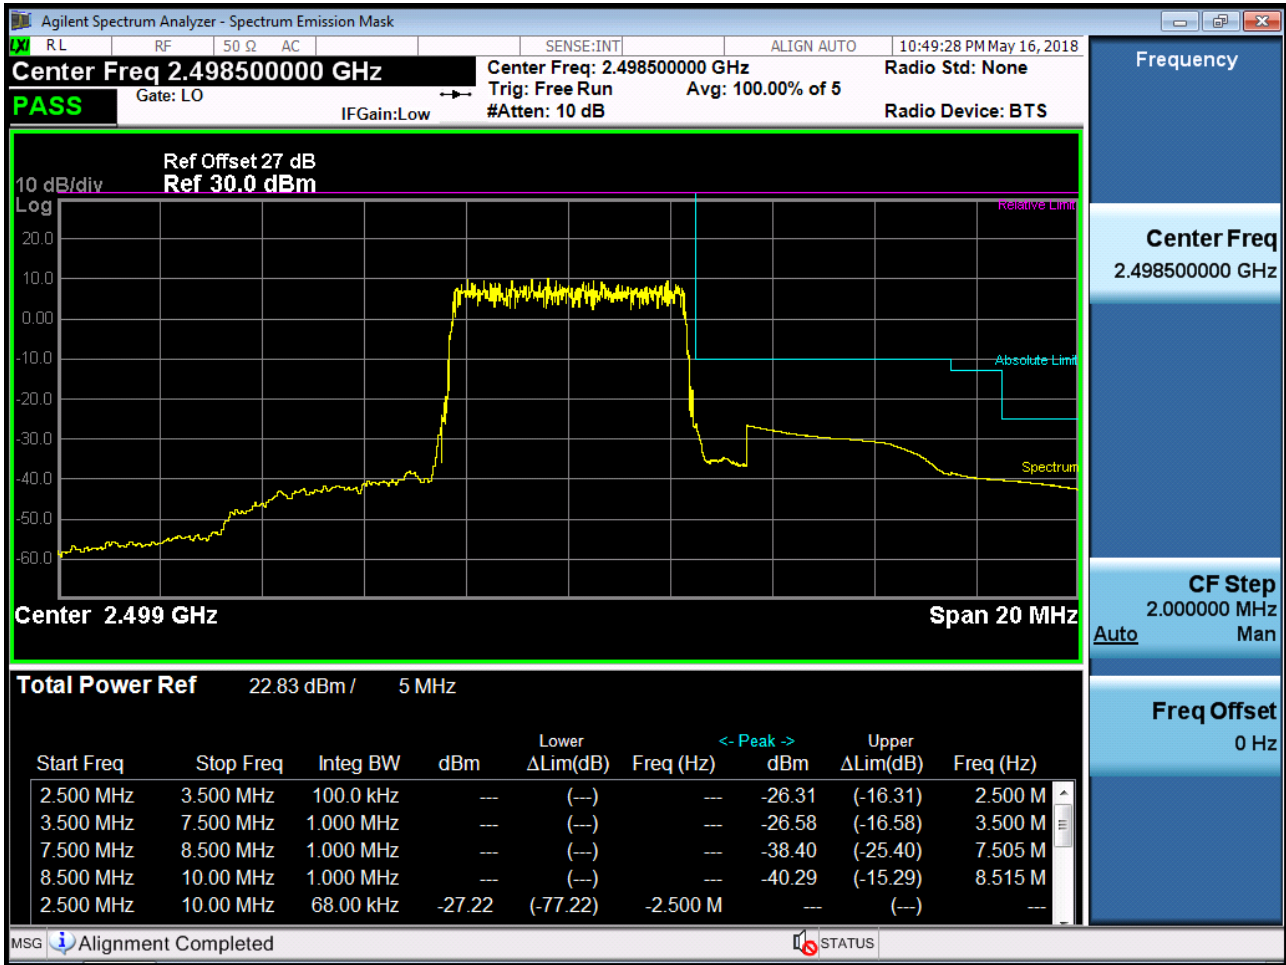


BAND 41. Mid Channel Edge Plot (5 MHz Ch.40620 QPSK RB 25)

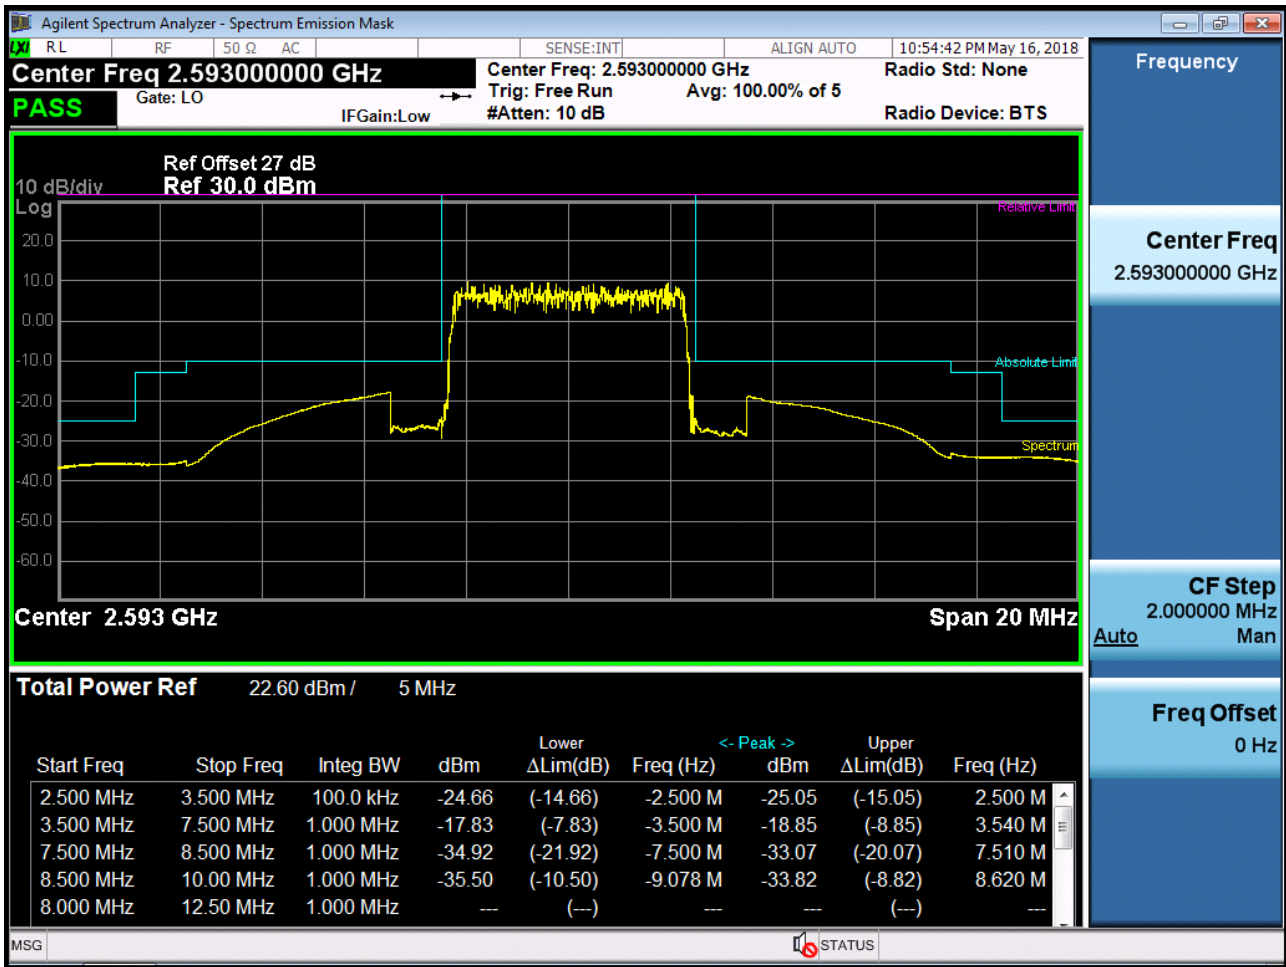


BAND 41. High Channel Edge Plot (5 MHz Ch.41565 QPSK RB 25)

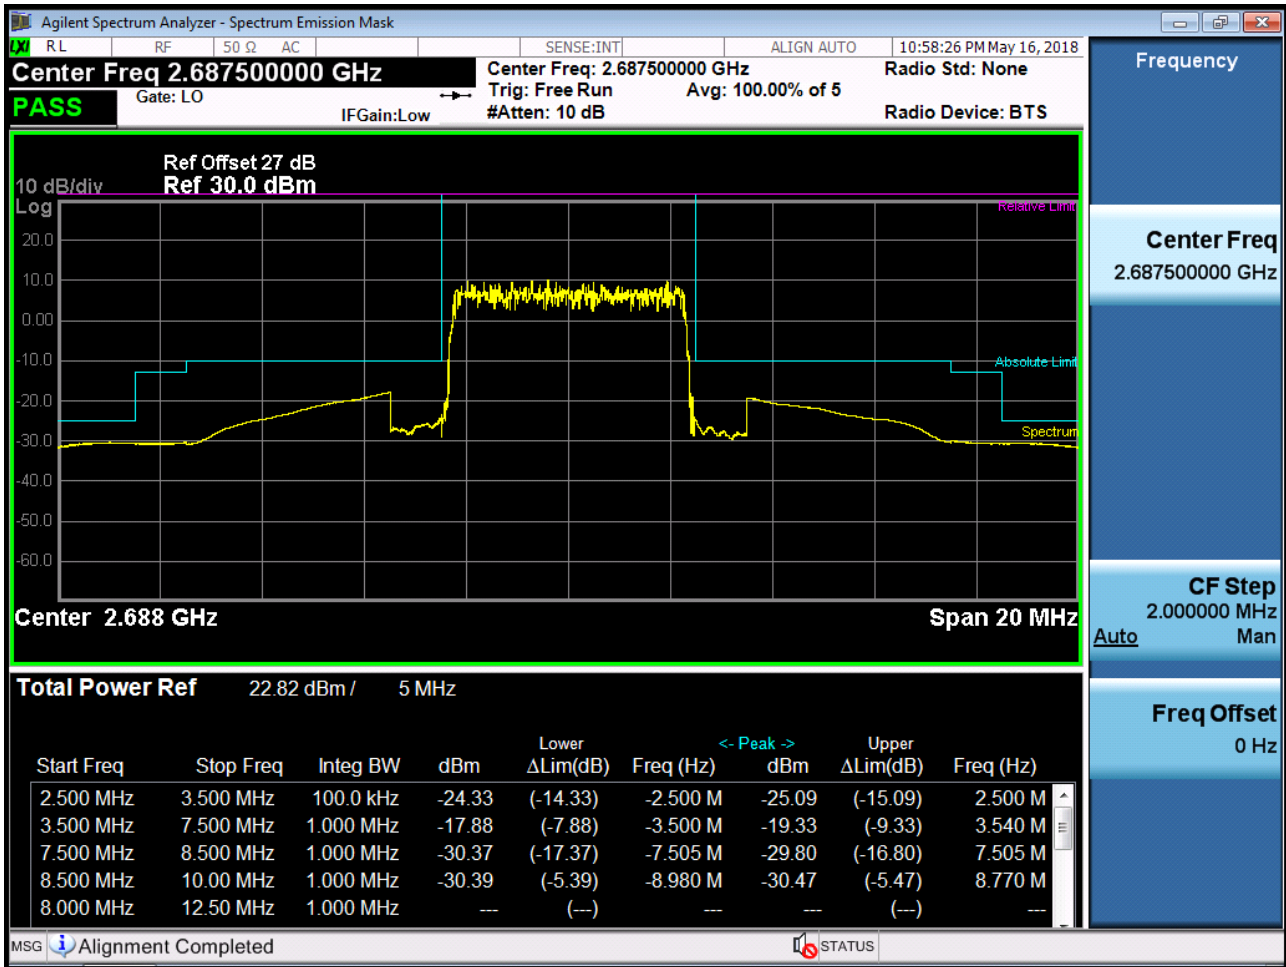


BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 50)-1

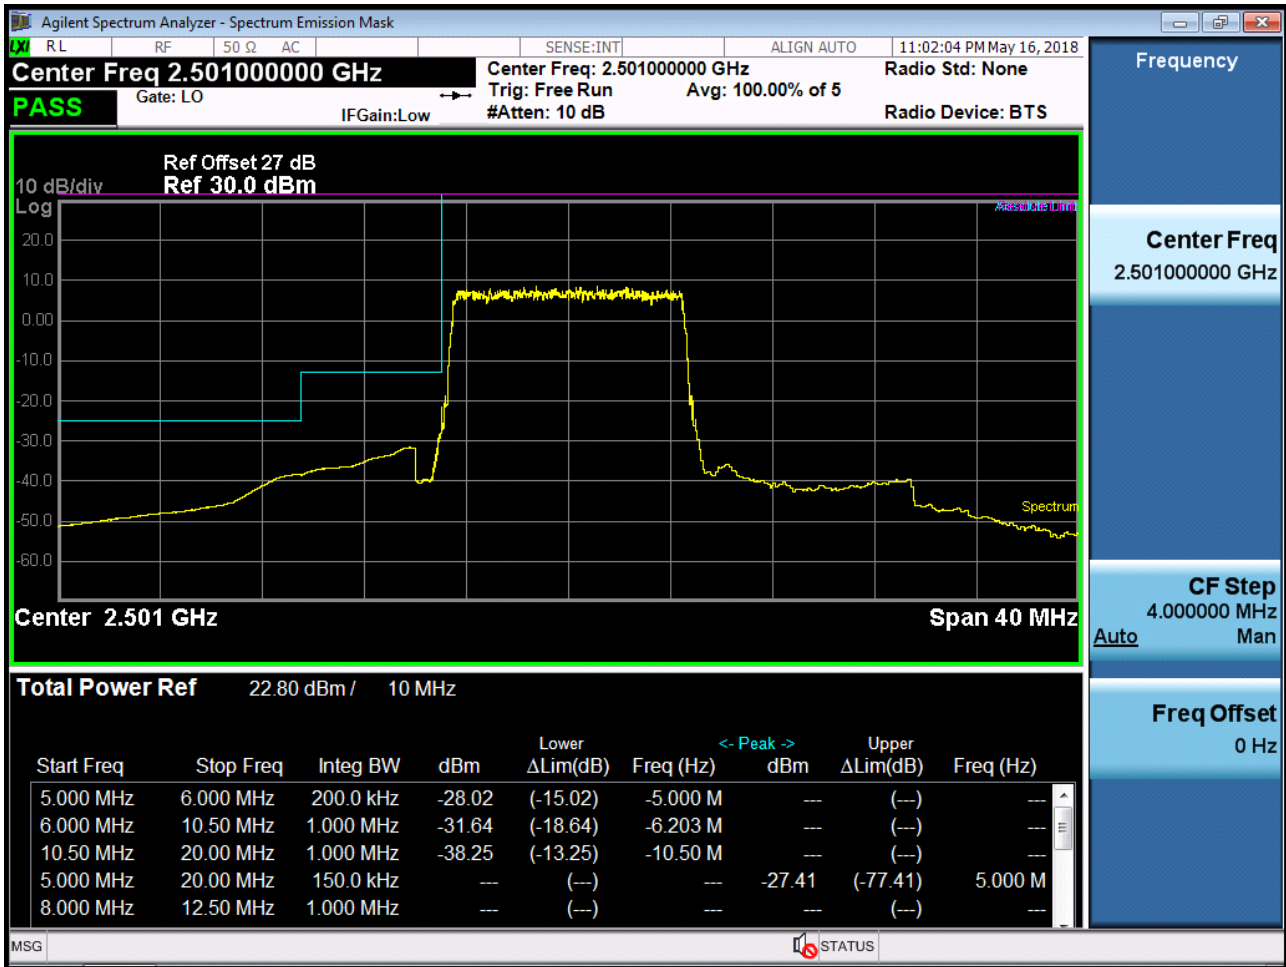


BAND 41. Low Channel Edge Plot (10 MHz Ch.39700 QPSK RB 50)-2

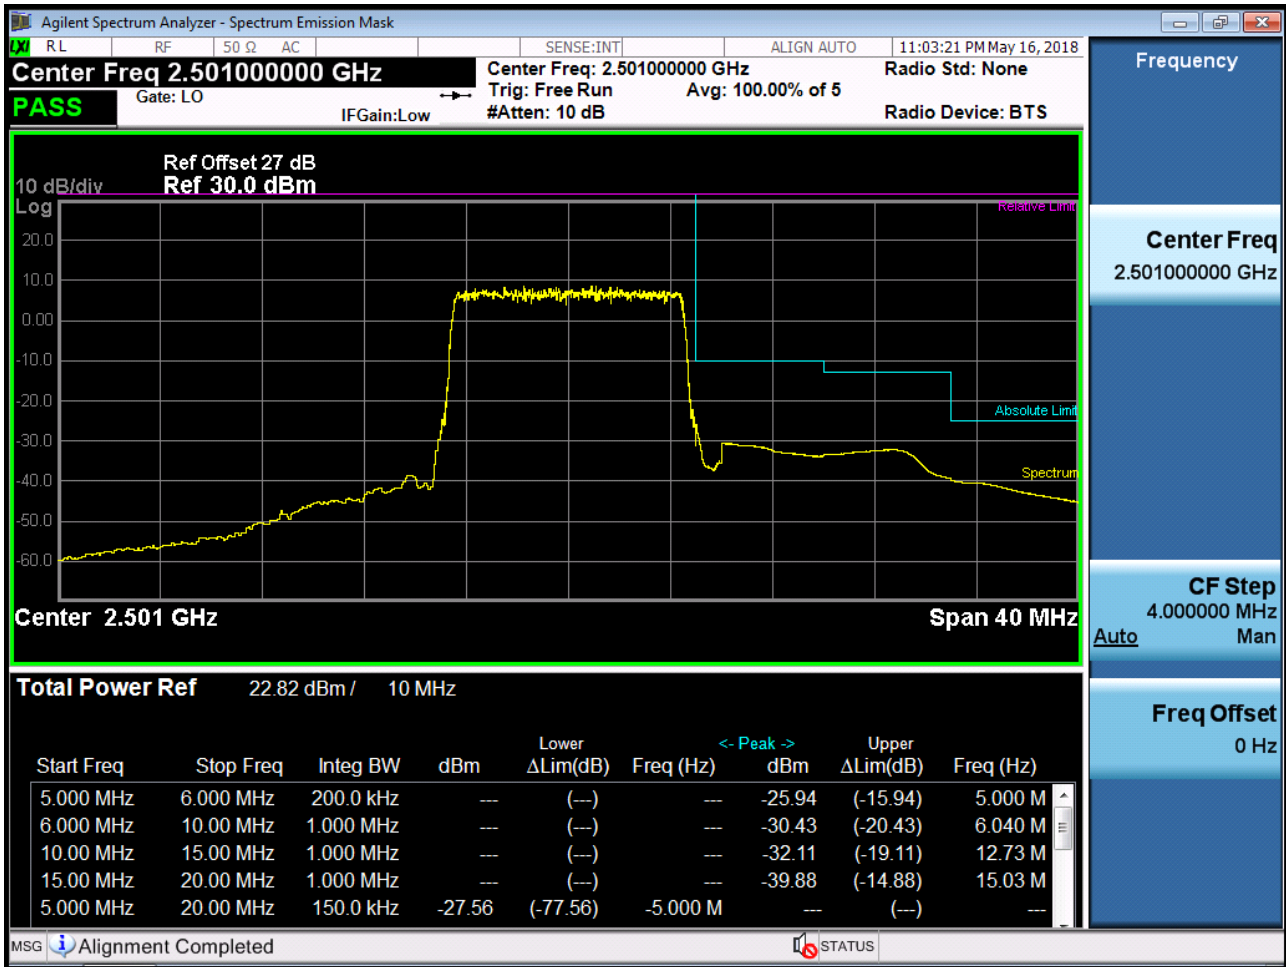


BAND 41. Mid Channel Edge Plot (10 MHz Ch.40620 QPSK RB 50)

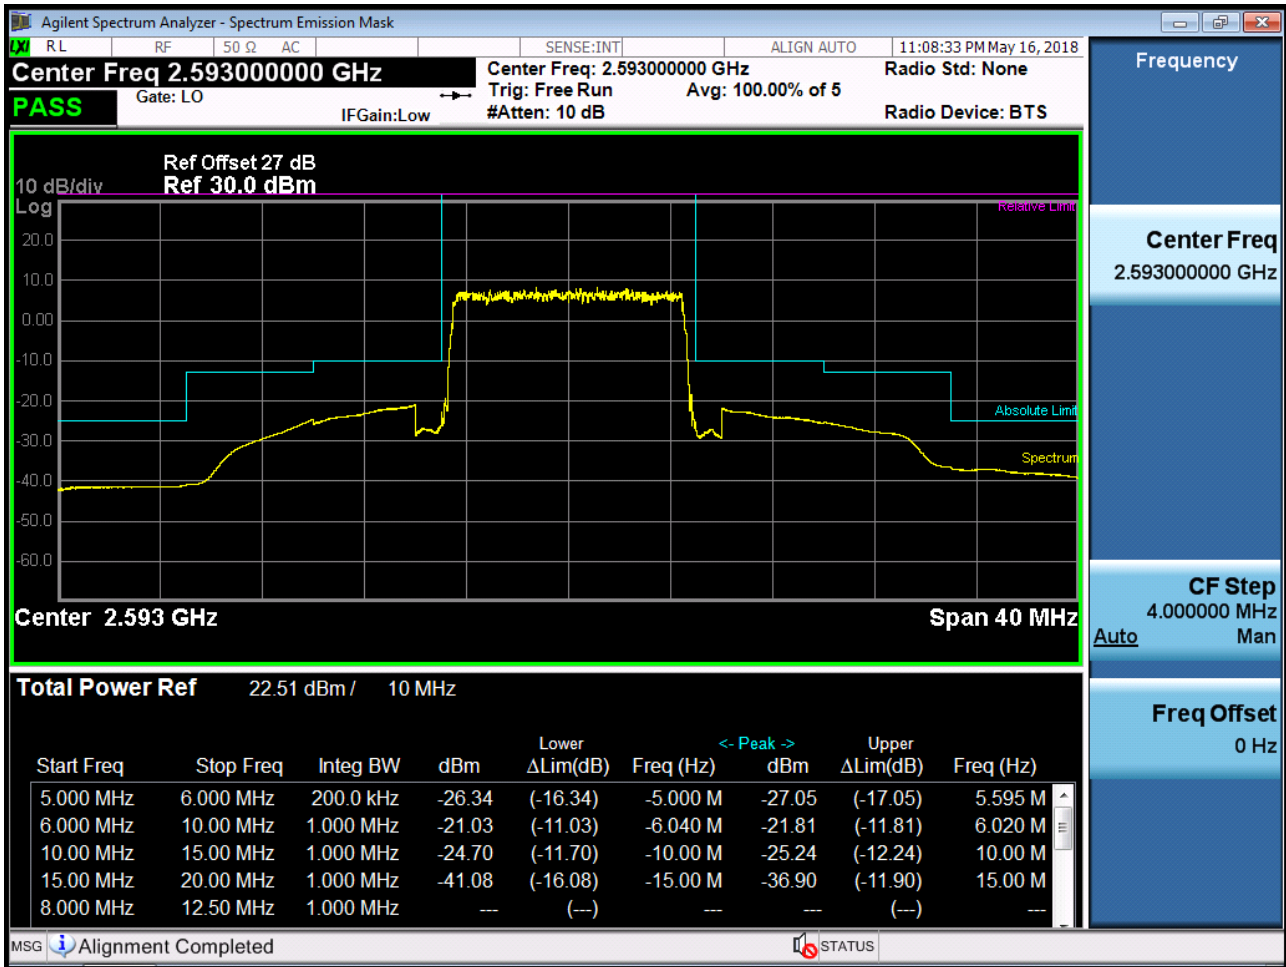


BAND 41. High Channel Edge Plot (10 MHz Ch.41540 QPSK RB 50)

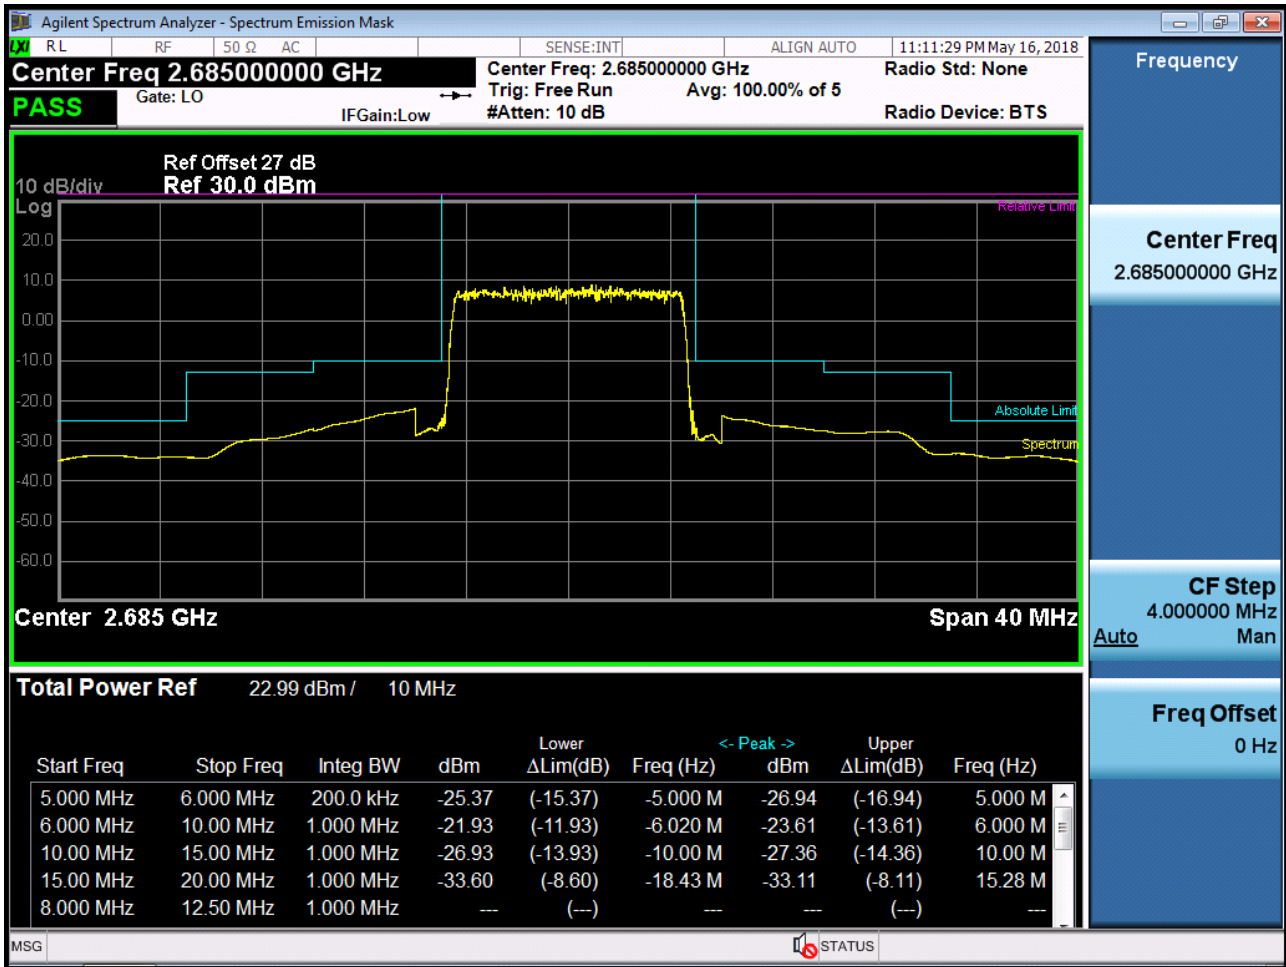


BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 75)-1

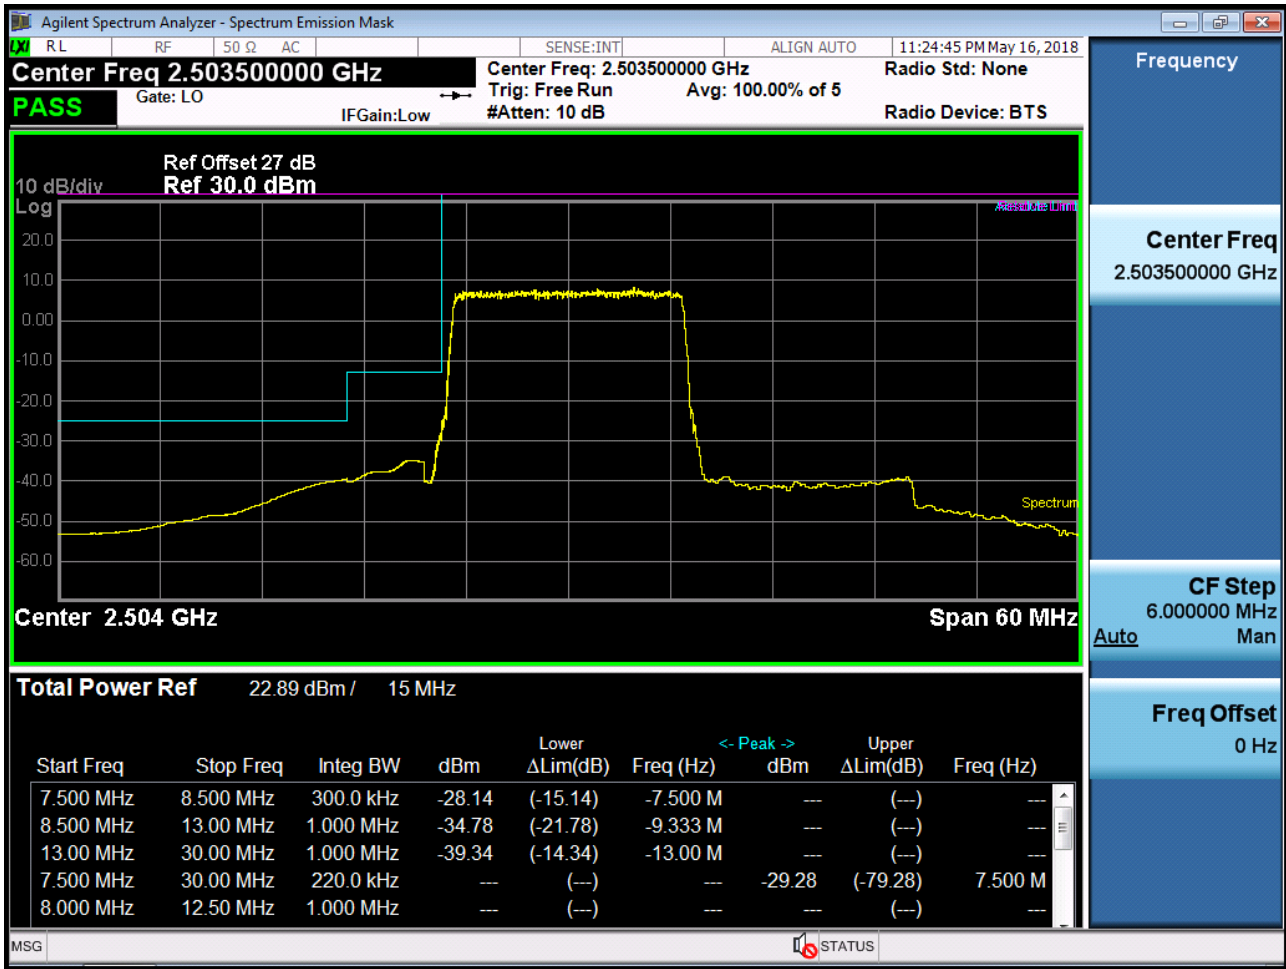


BAND 41. Low Channel Edge Plot (15 MHz Ch.39725 QPSK RB 75)-2

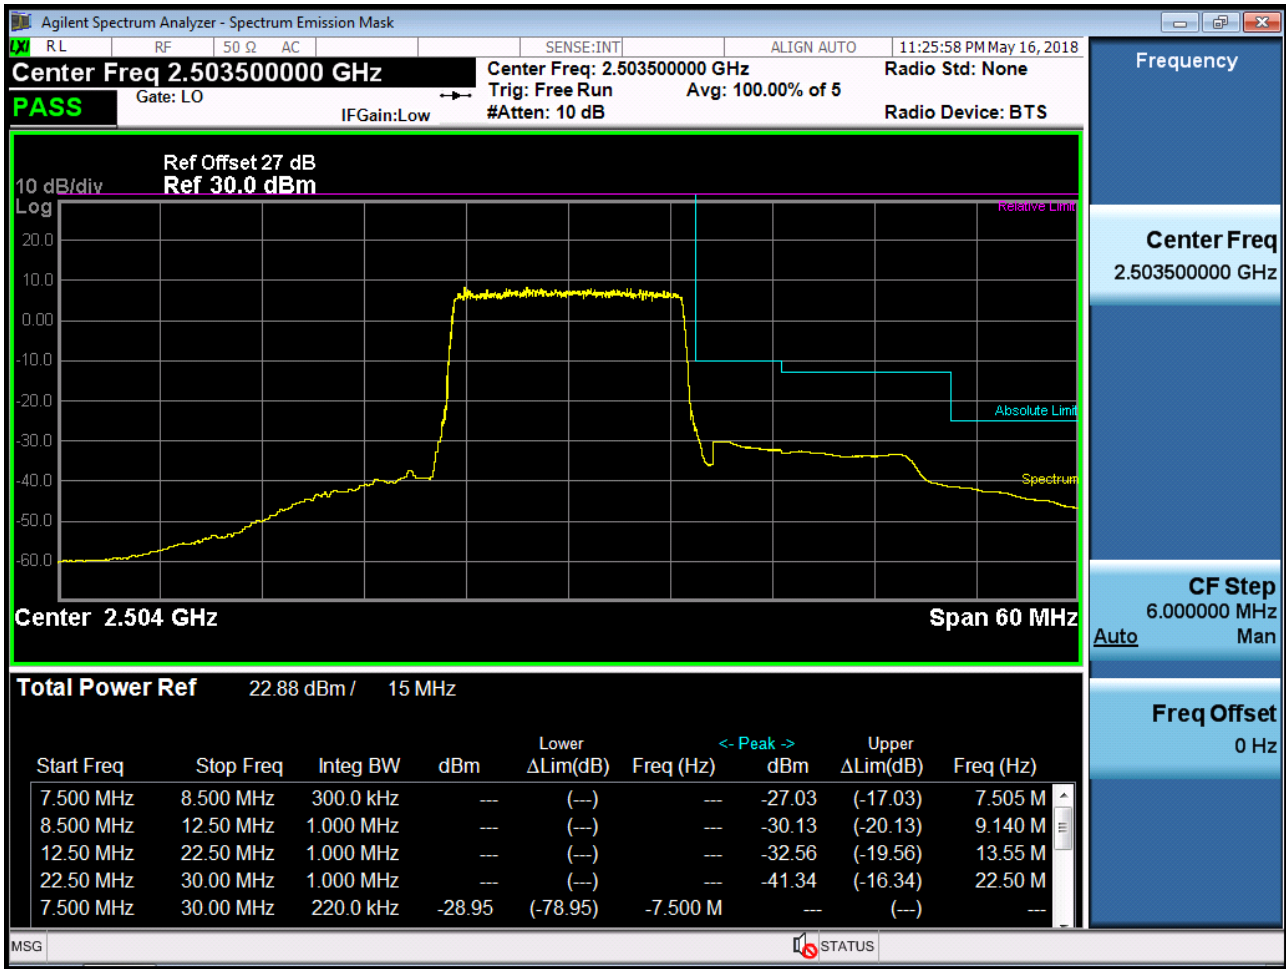


BAND 41. Mid Channel Edge Plot (15 MHz Ch.40620 QPSK RB 75)

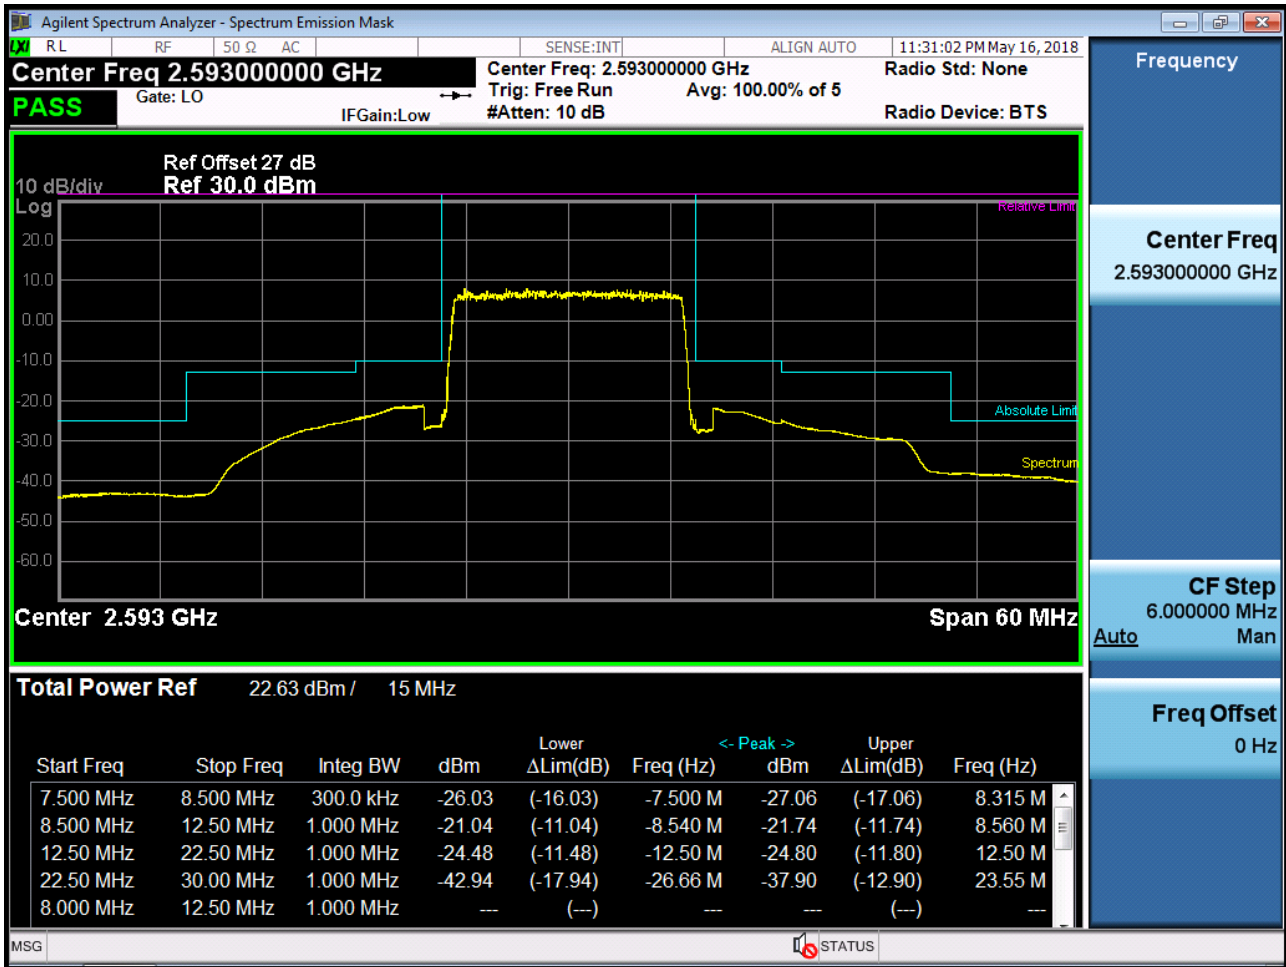


BAND 41. High Channel Edge Plot (15 MHz Ch.41515 QPSK RB 75)

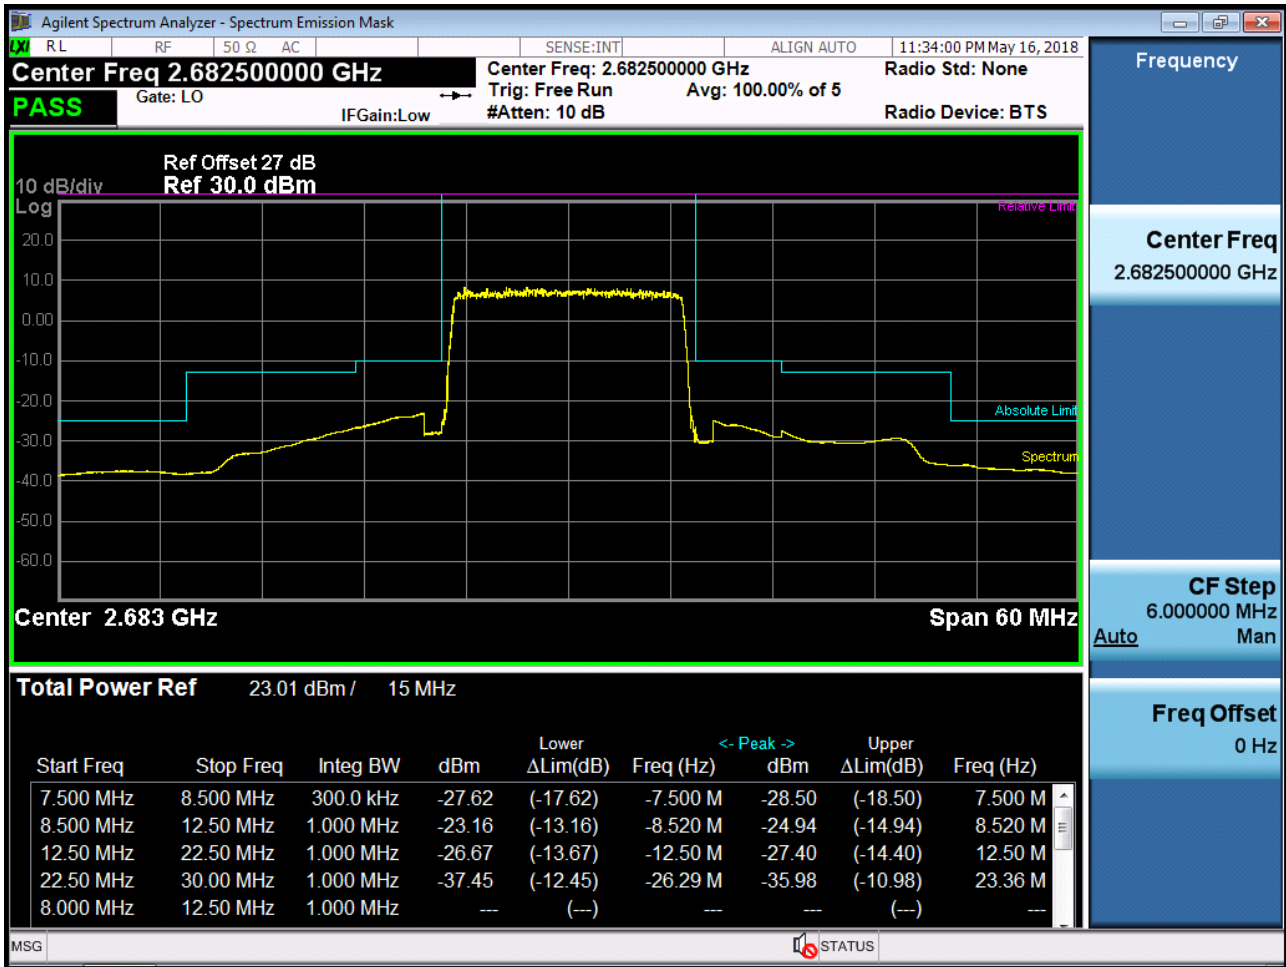


BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 100)-1

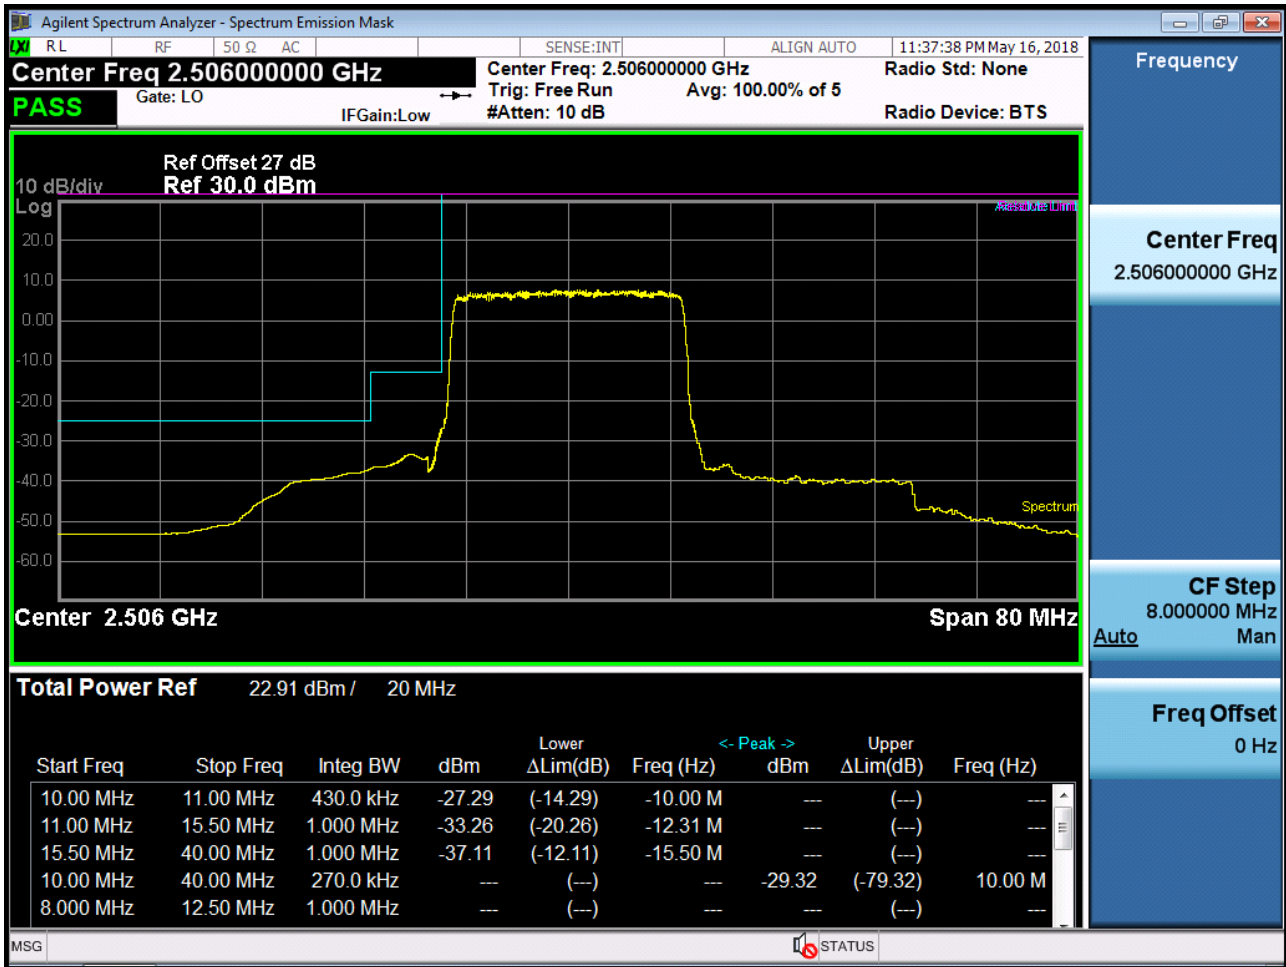


BAND 41. Low Channel Edge Plot (20 MHz Ch.39750 QPSK RB 100)-2

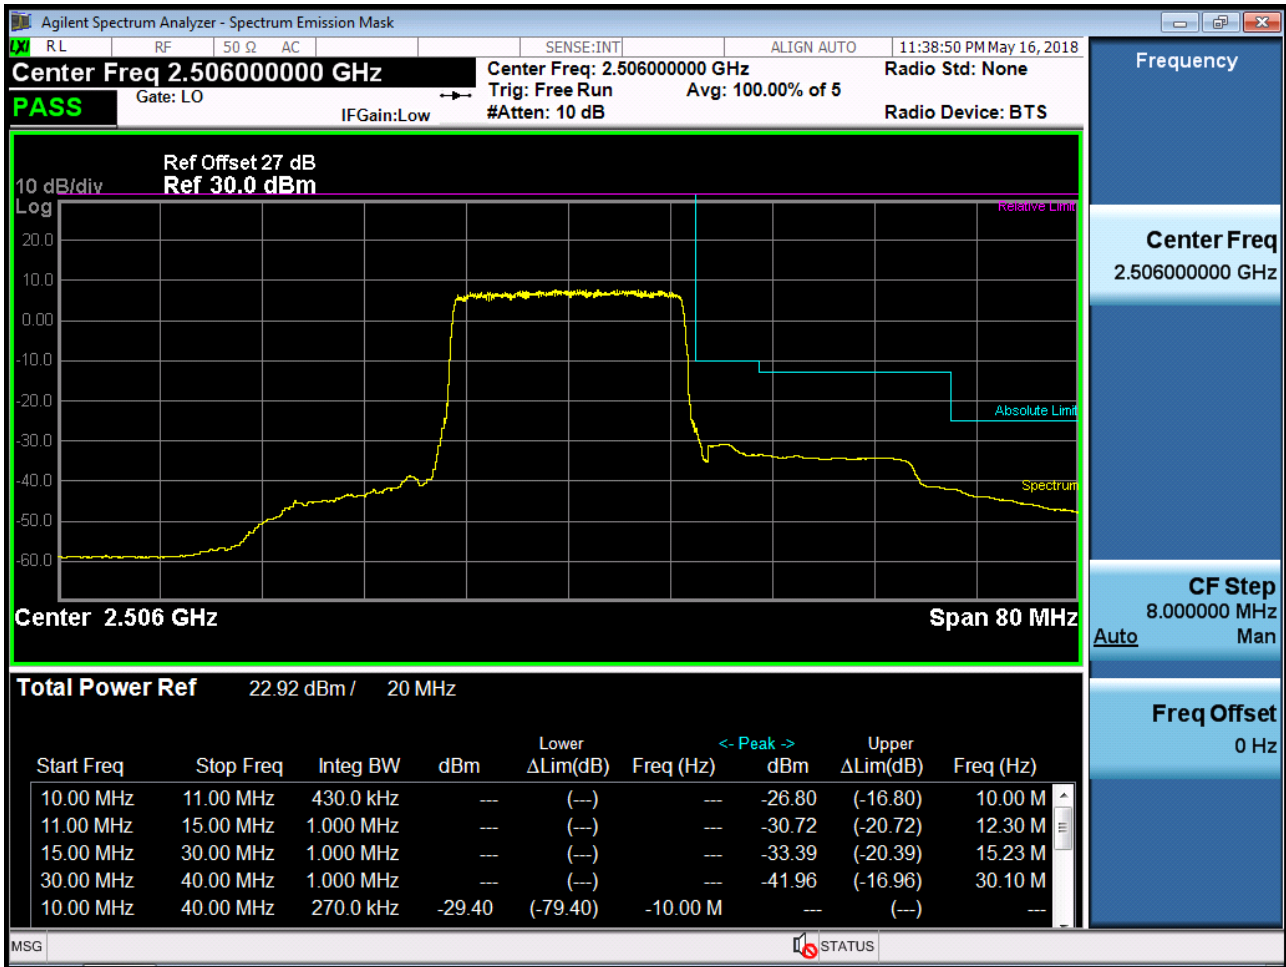


BAND 41. Mid Channel Edge Plot (20 MHz Ch.40620 QPSK RB 100)

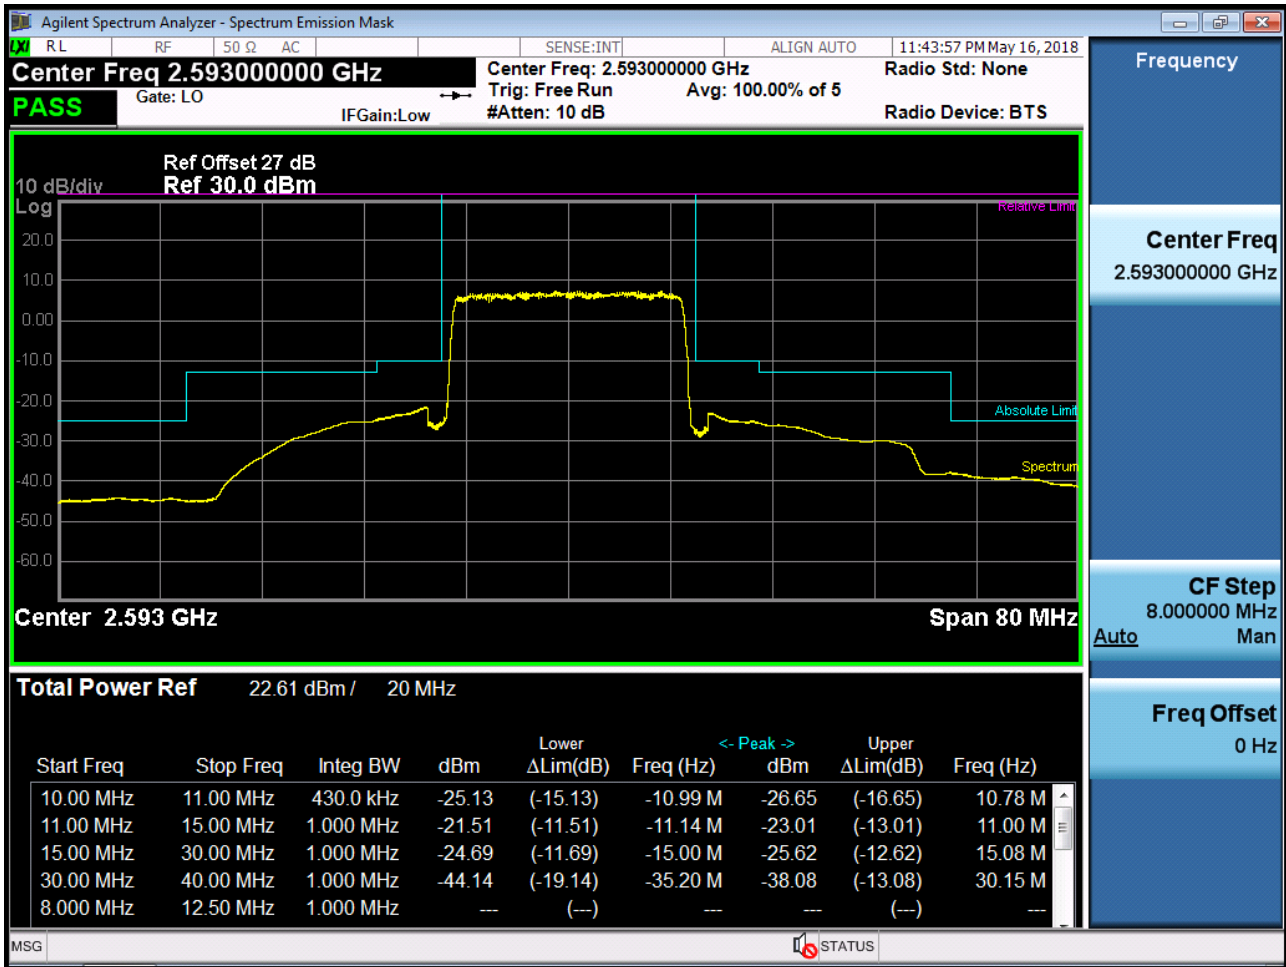


BAND 41. High Channel Edge Plot (20 MHz Ch.41490 QPSK RB 100)

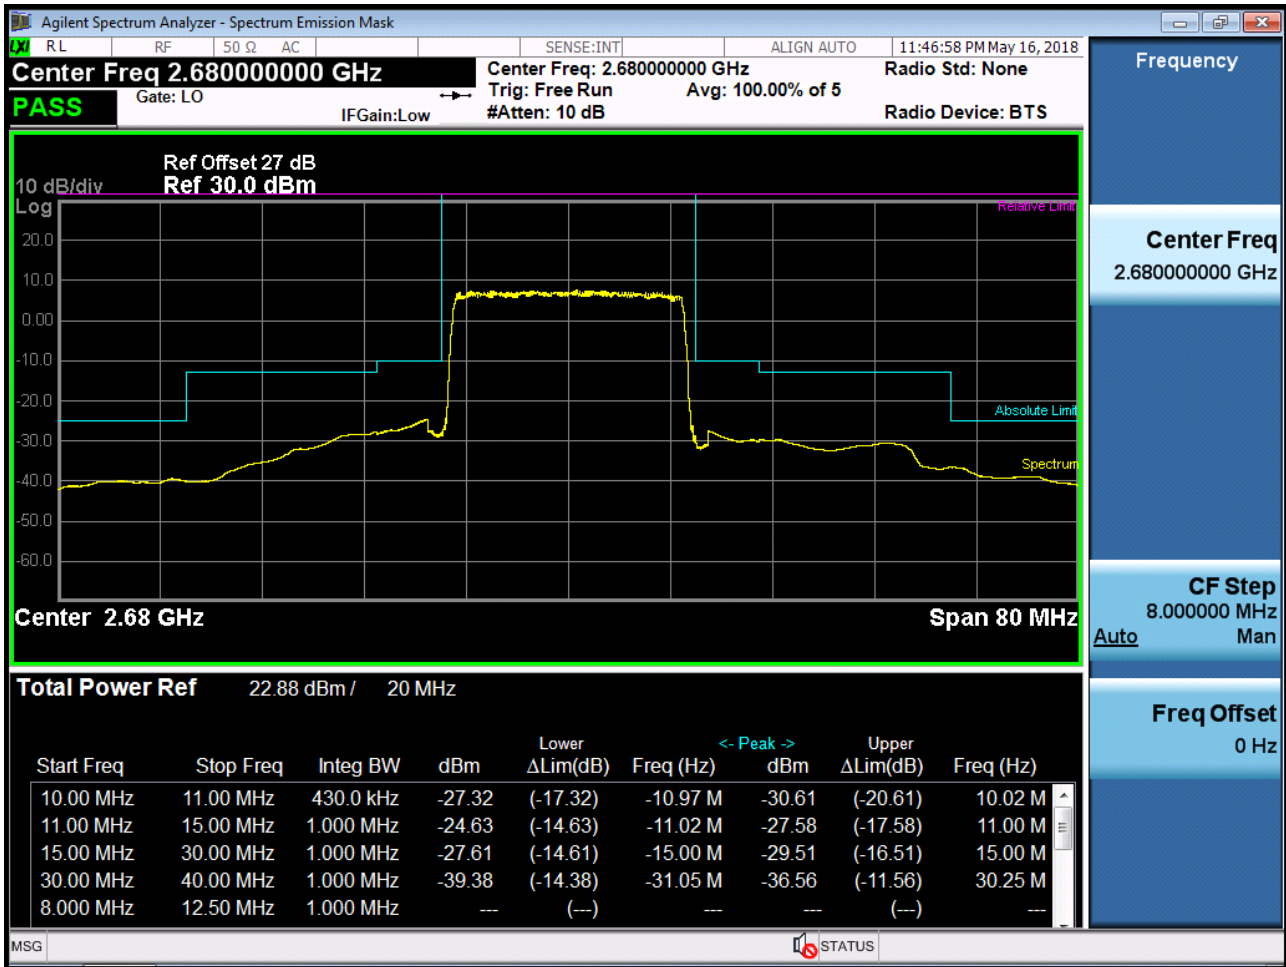


BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.39675 QPSK RB 1, Offset 0)

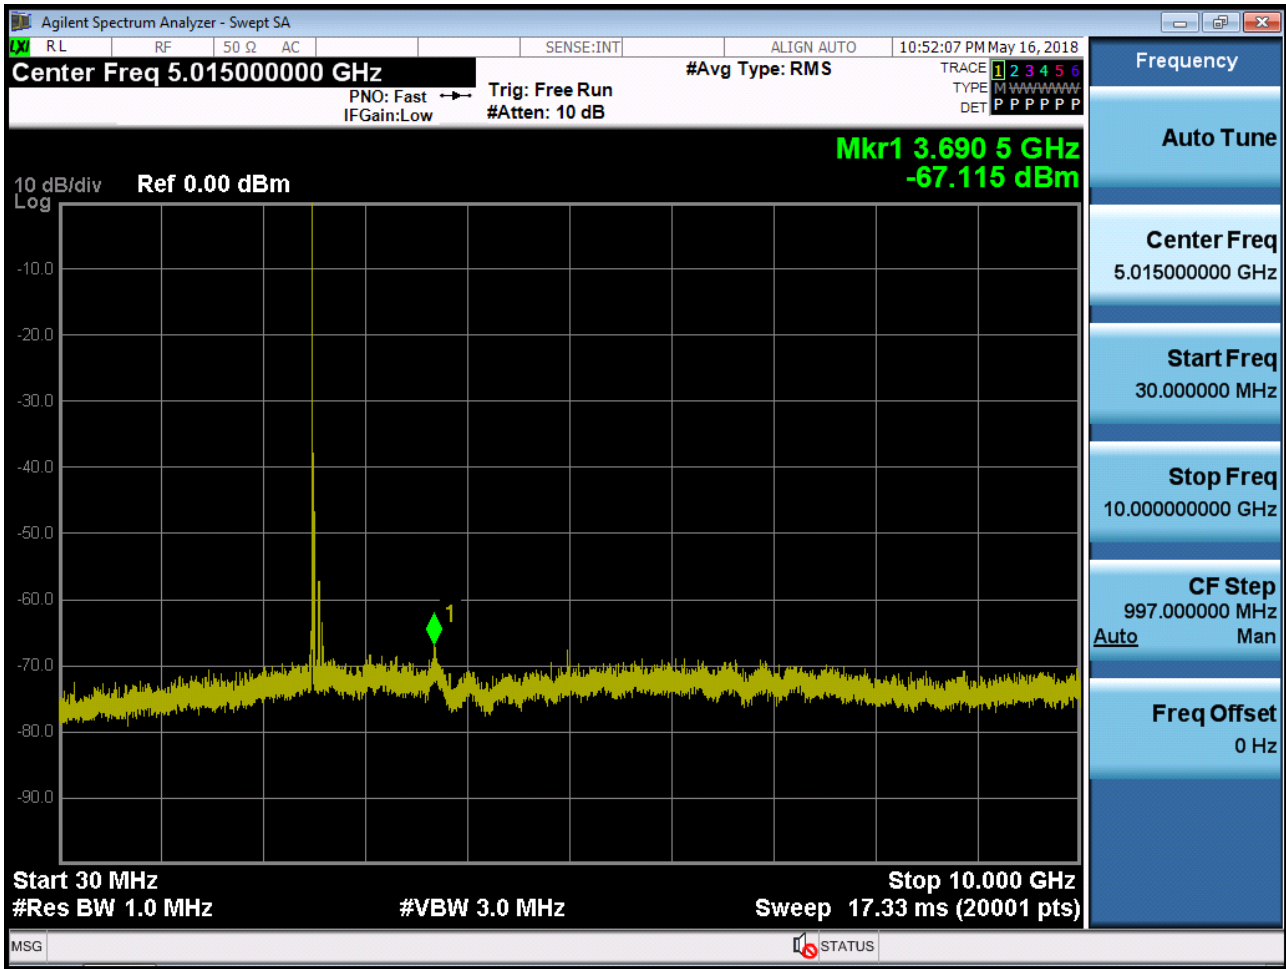


BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 39675 QPSK RB 1, Offset 0)

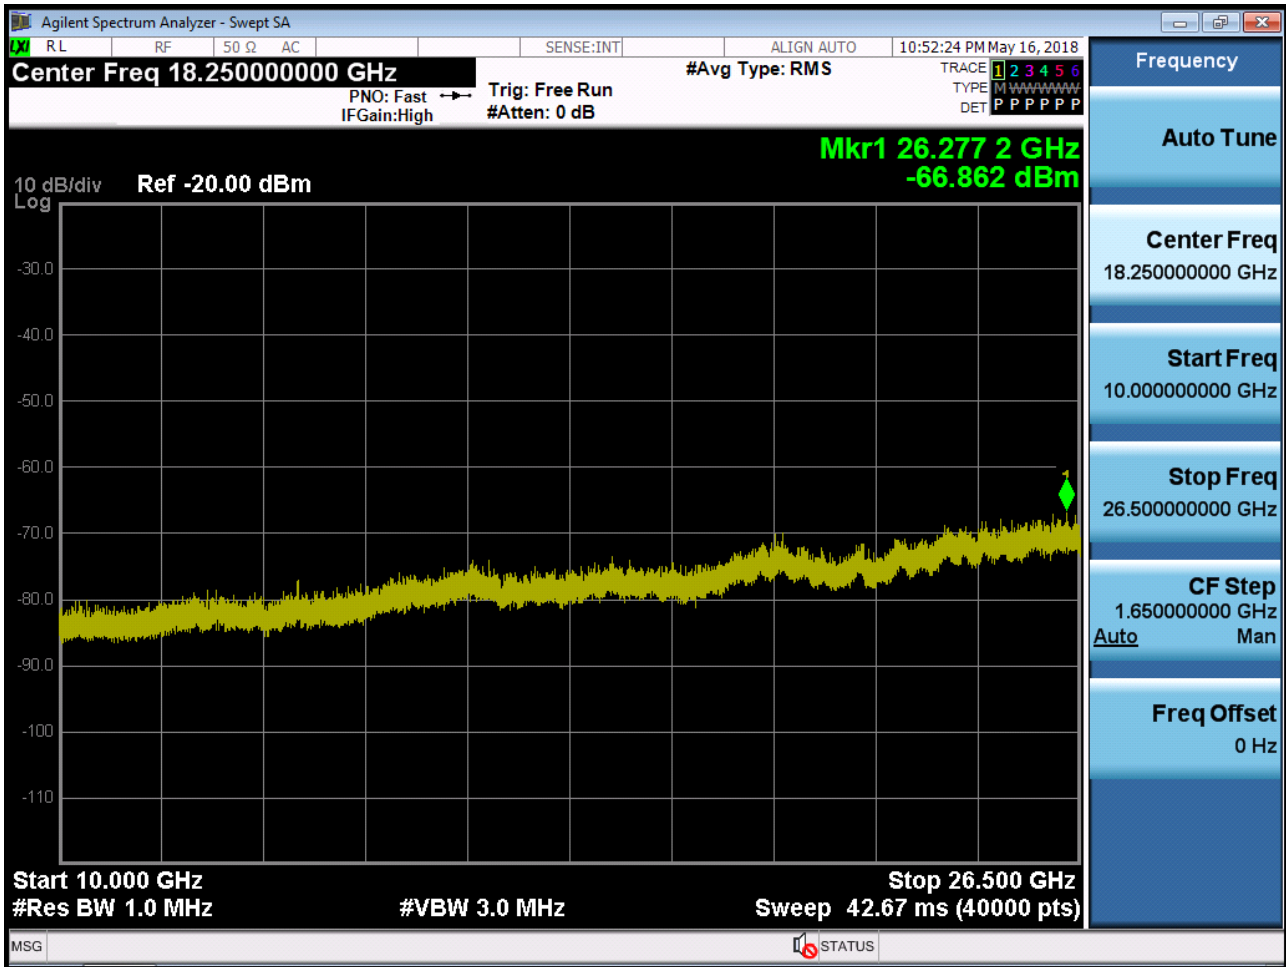


BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.40620 QPSK RB 1, Offset 0)

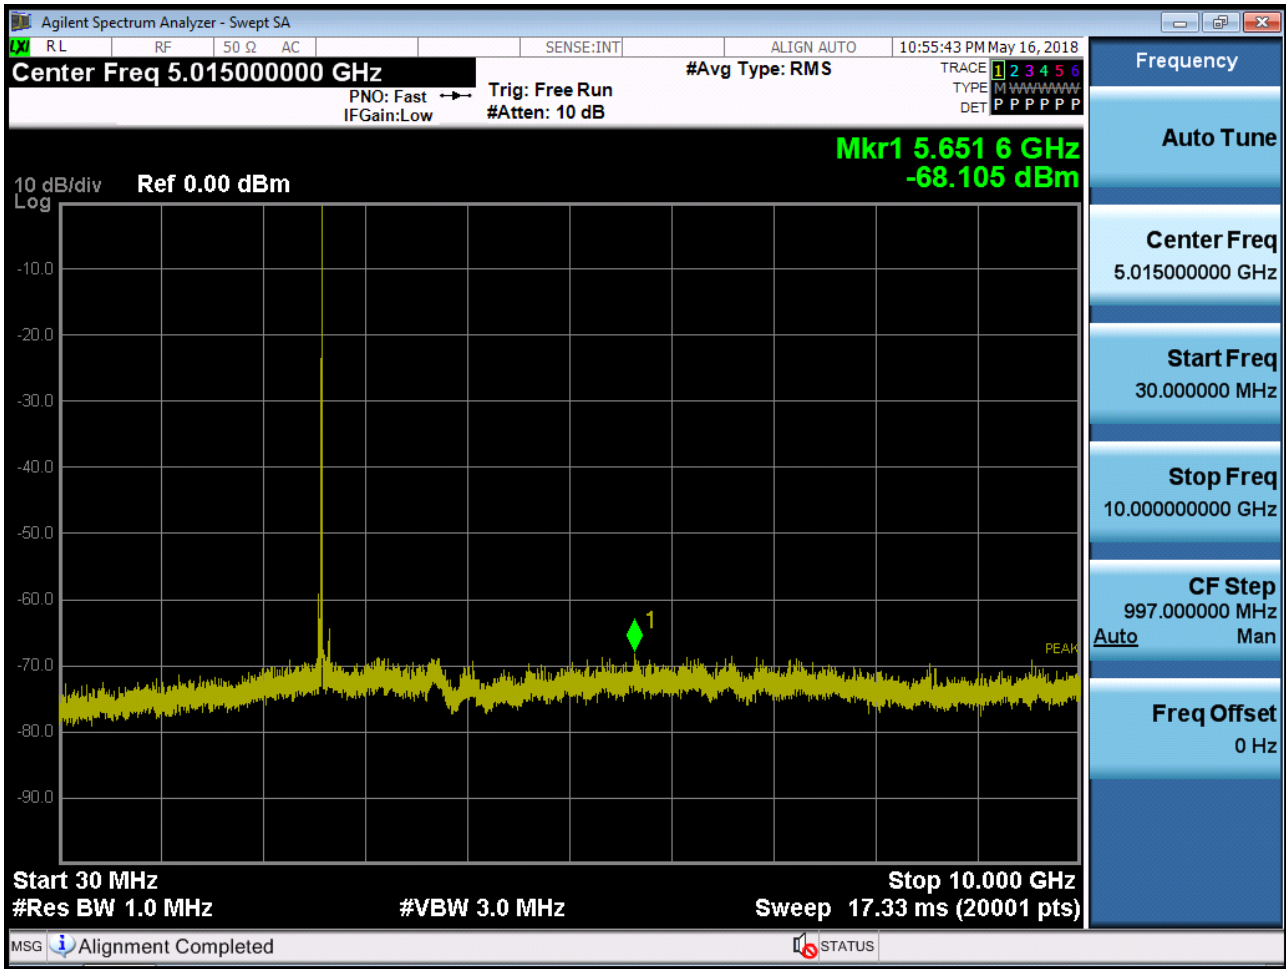


BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 40620 QPSK RB 1, Offset 0)

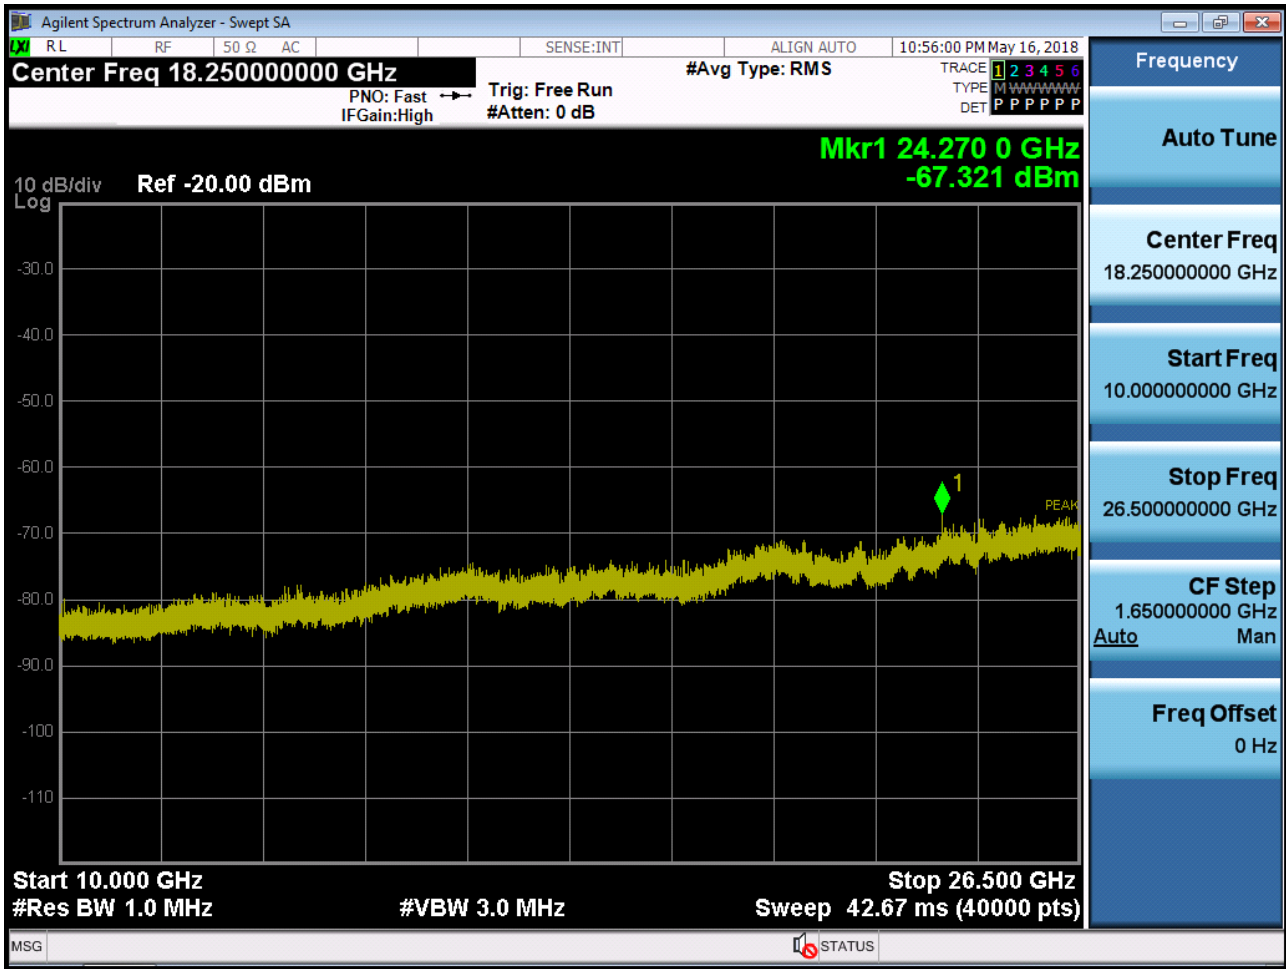


BAND 41. Conducted Spurious Plot 1 (5 MHz Ch.41565 QPSK RB 1, Offset 0)

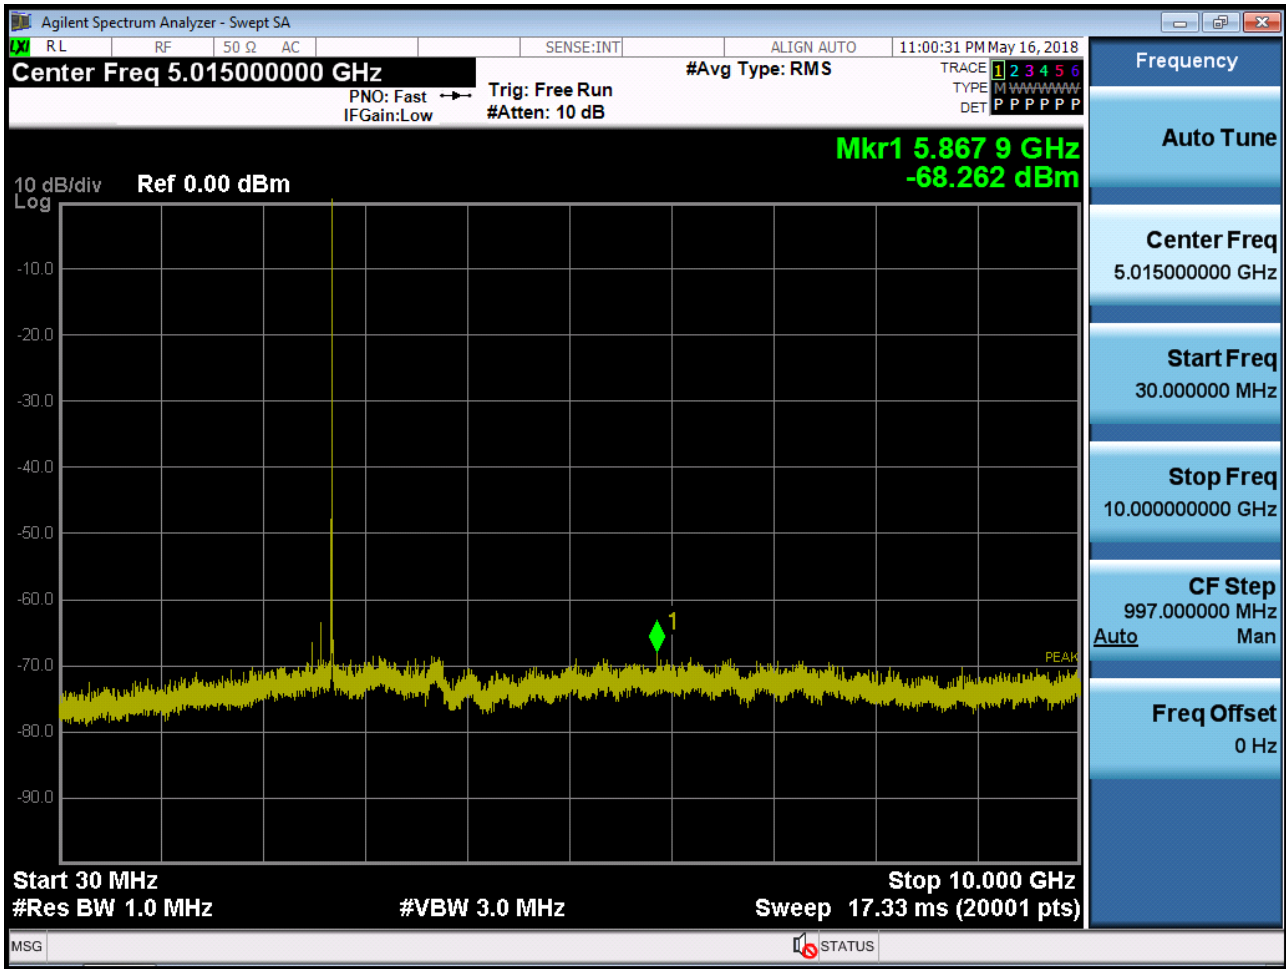


BAND 41. Conducted Spurious Plot 2 (5 MHz Ch. 41565 QPSK RB 1, Offset 0)

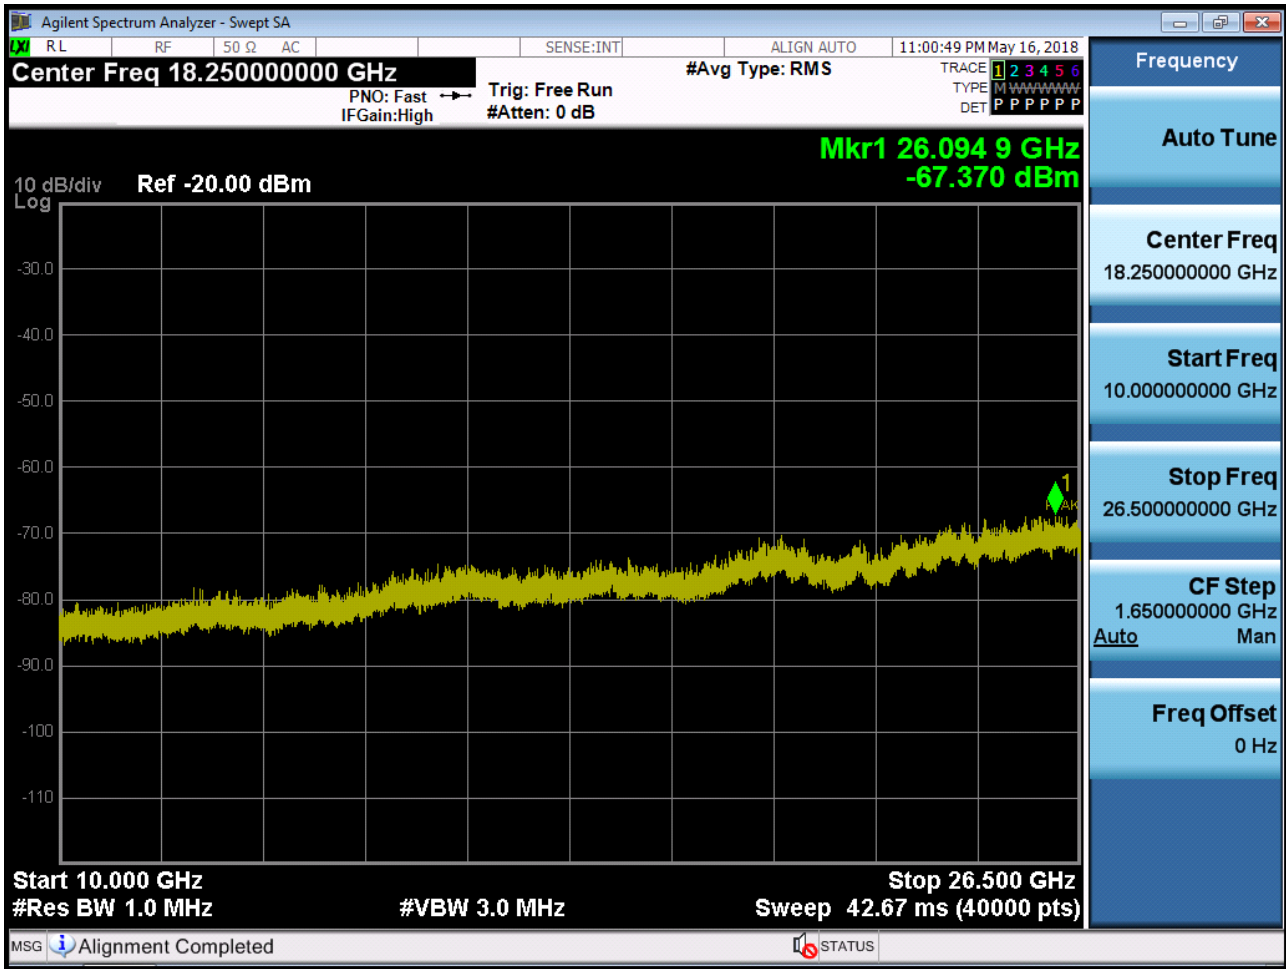


BAND 41. Conducted Spurious Plot 1 (10 MHz Ch.39700 QPSK RB 1, Offset 0)

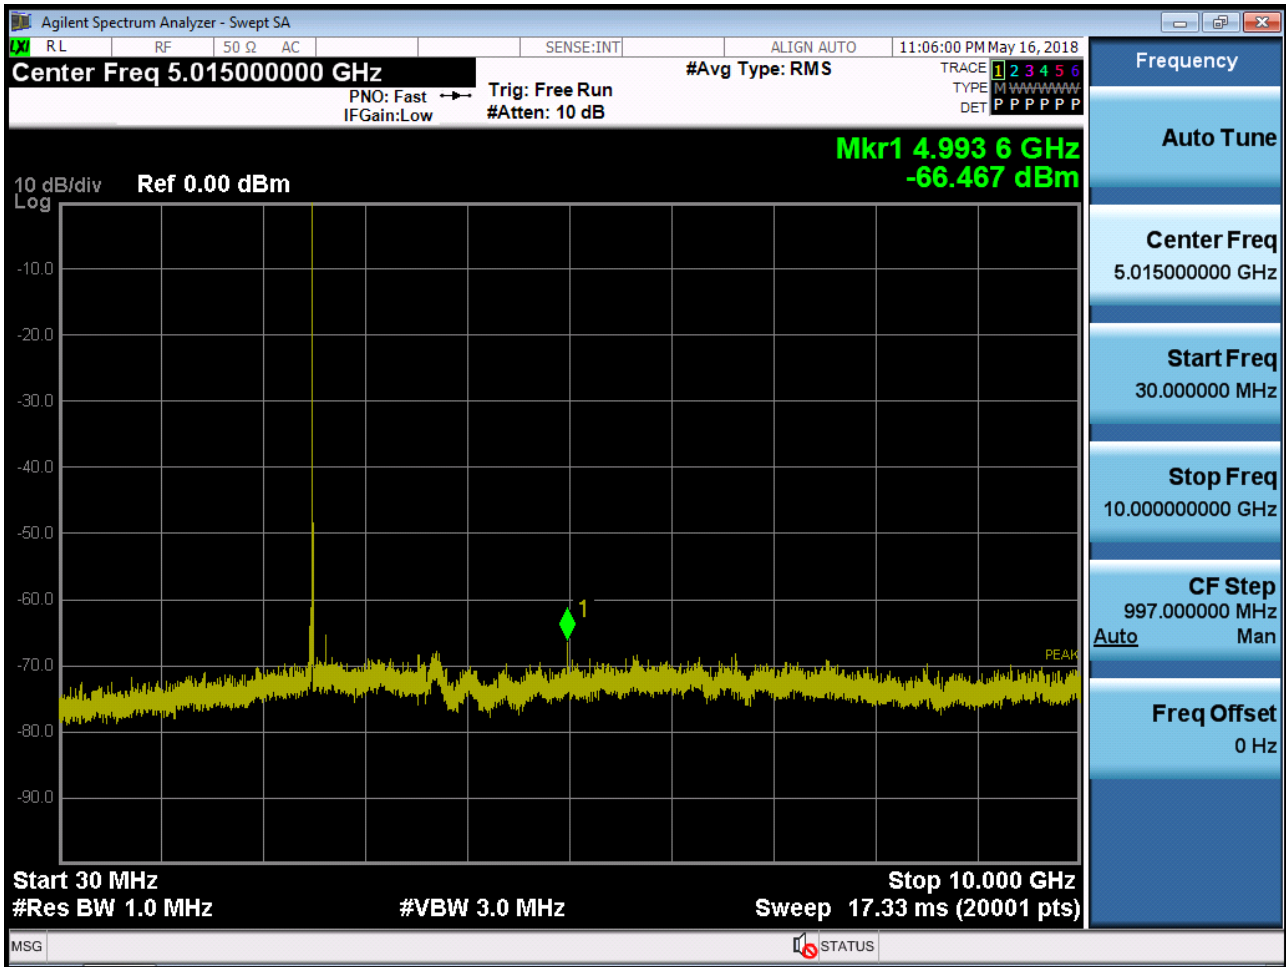


BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 39700 QPSK RB 1, Offset 0)

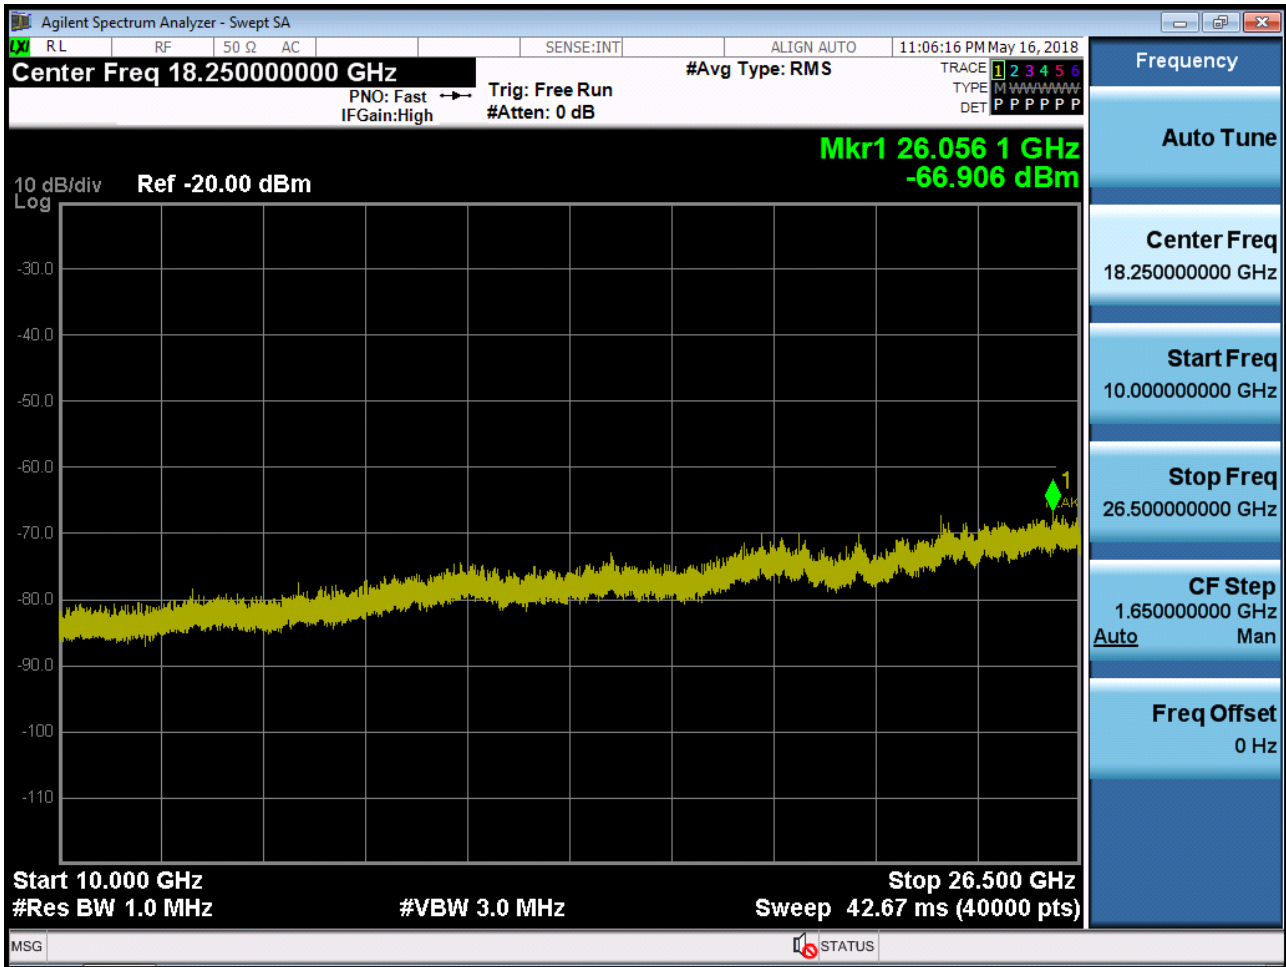


BAND 41. Conducted Spurious Plot 1 (10 MHz Ch.40620 QPSK RB 1, Offset 0)

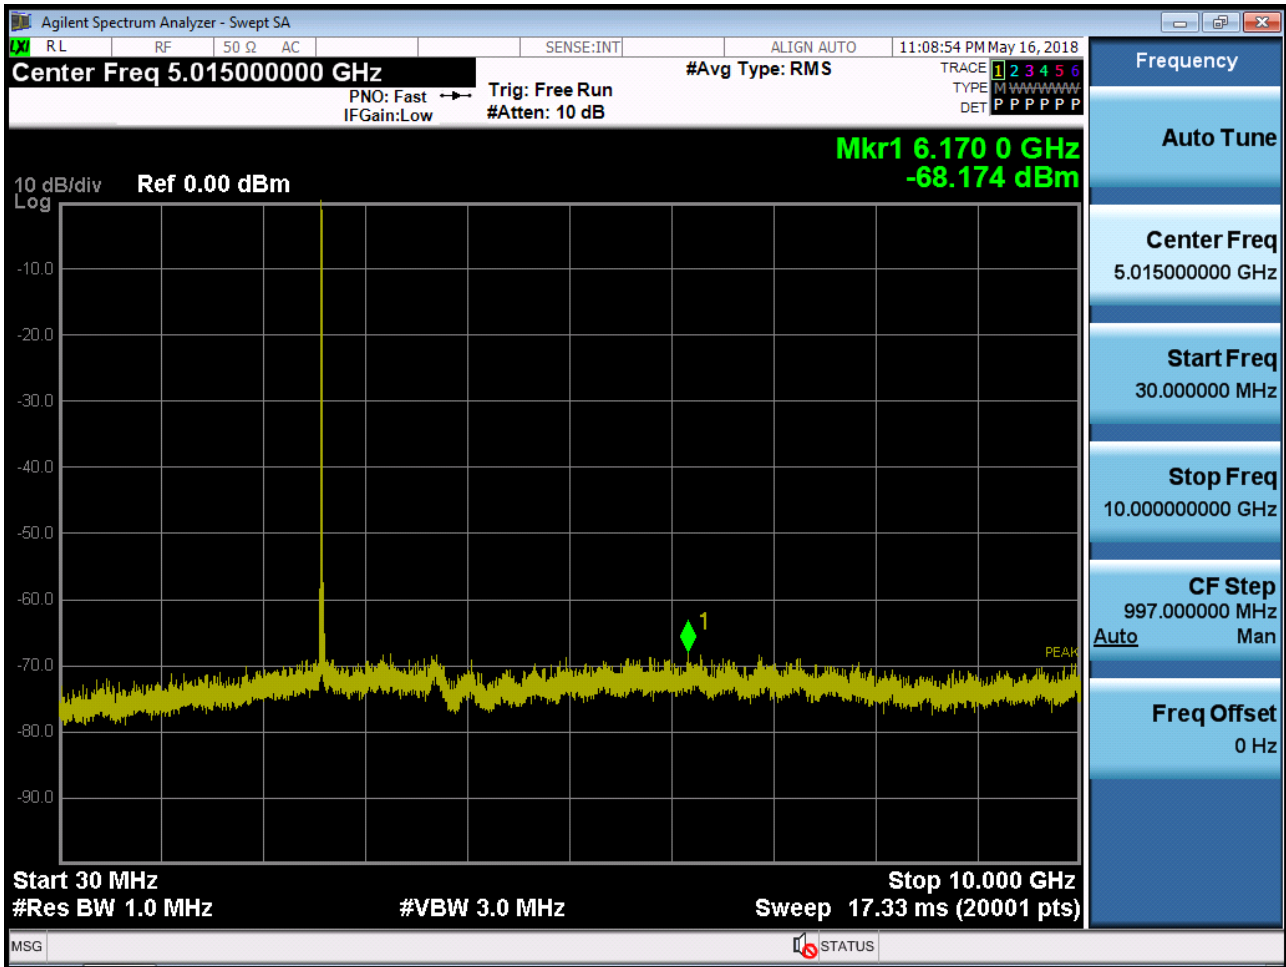


BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 40620 QPSK RB 1, Offset 0)

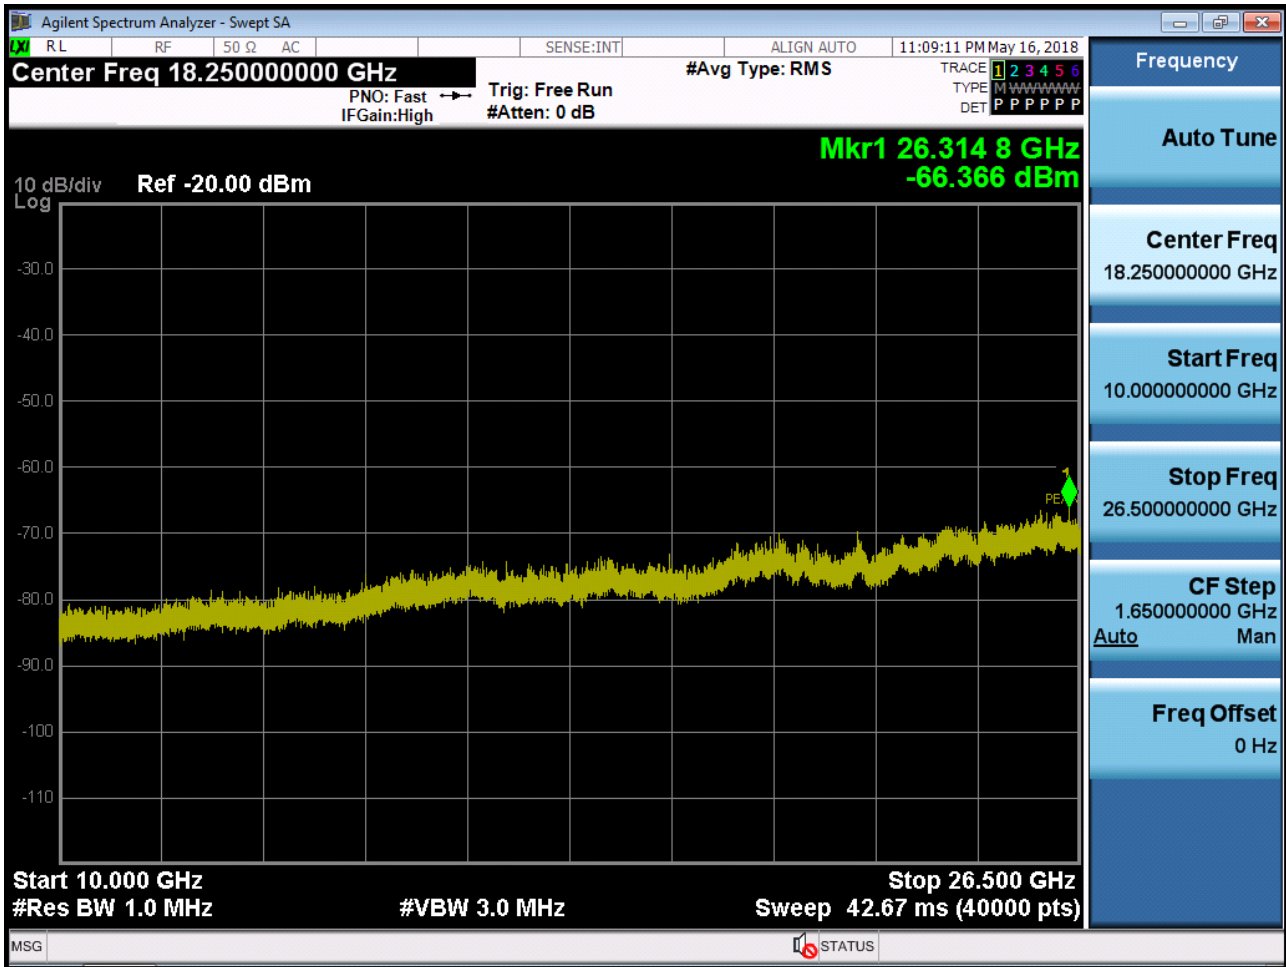


BAND 41. Conducted Spurious Plot 1 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)

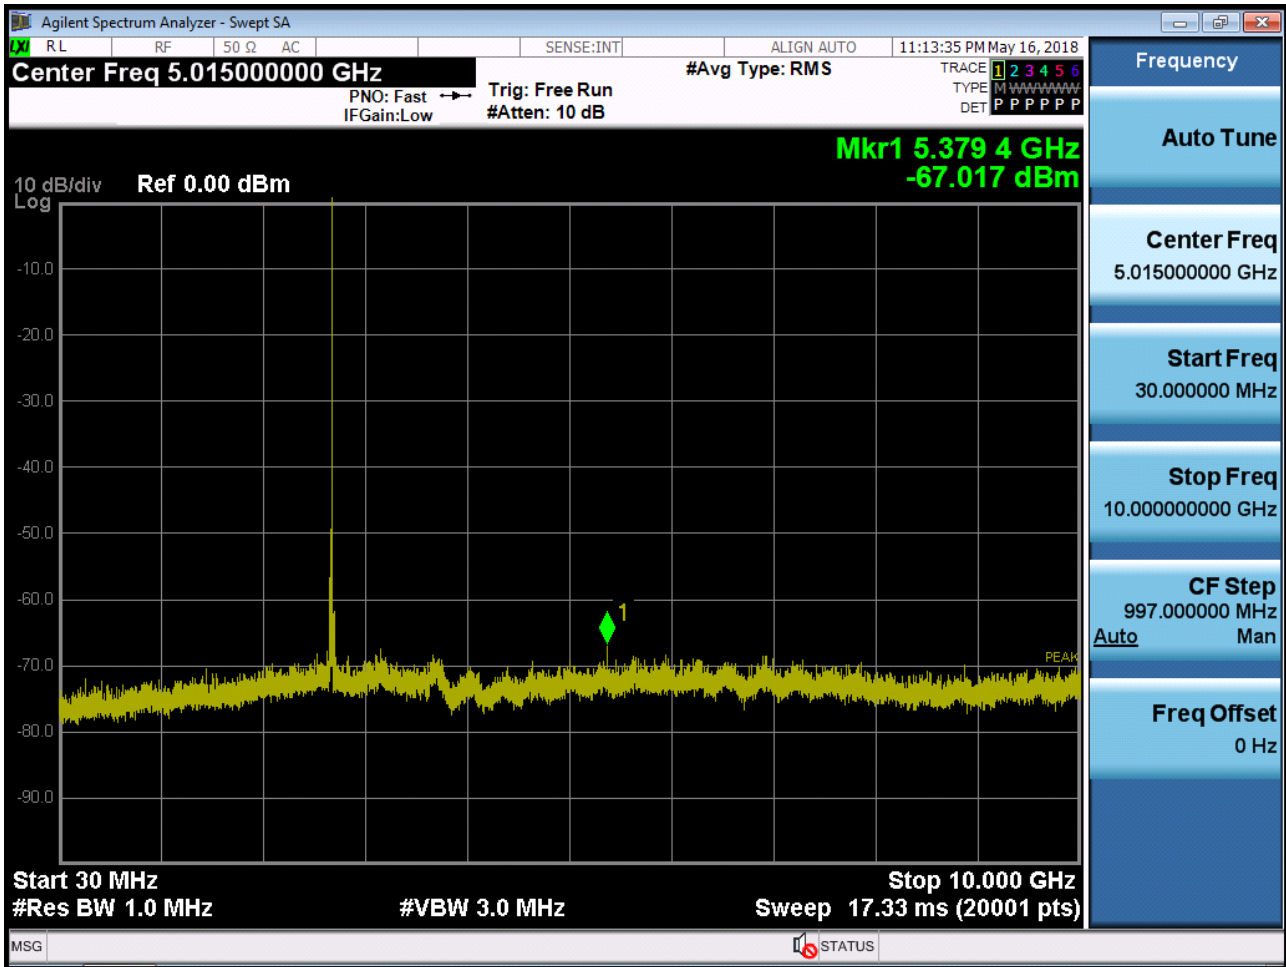


BAND 41. Conducted Spurious Plot 2 (10 MHz Ch. 41540 QPSK RB 1, Offset 0)

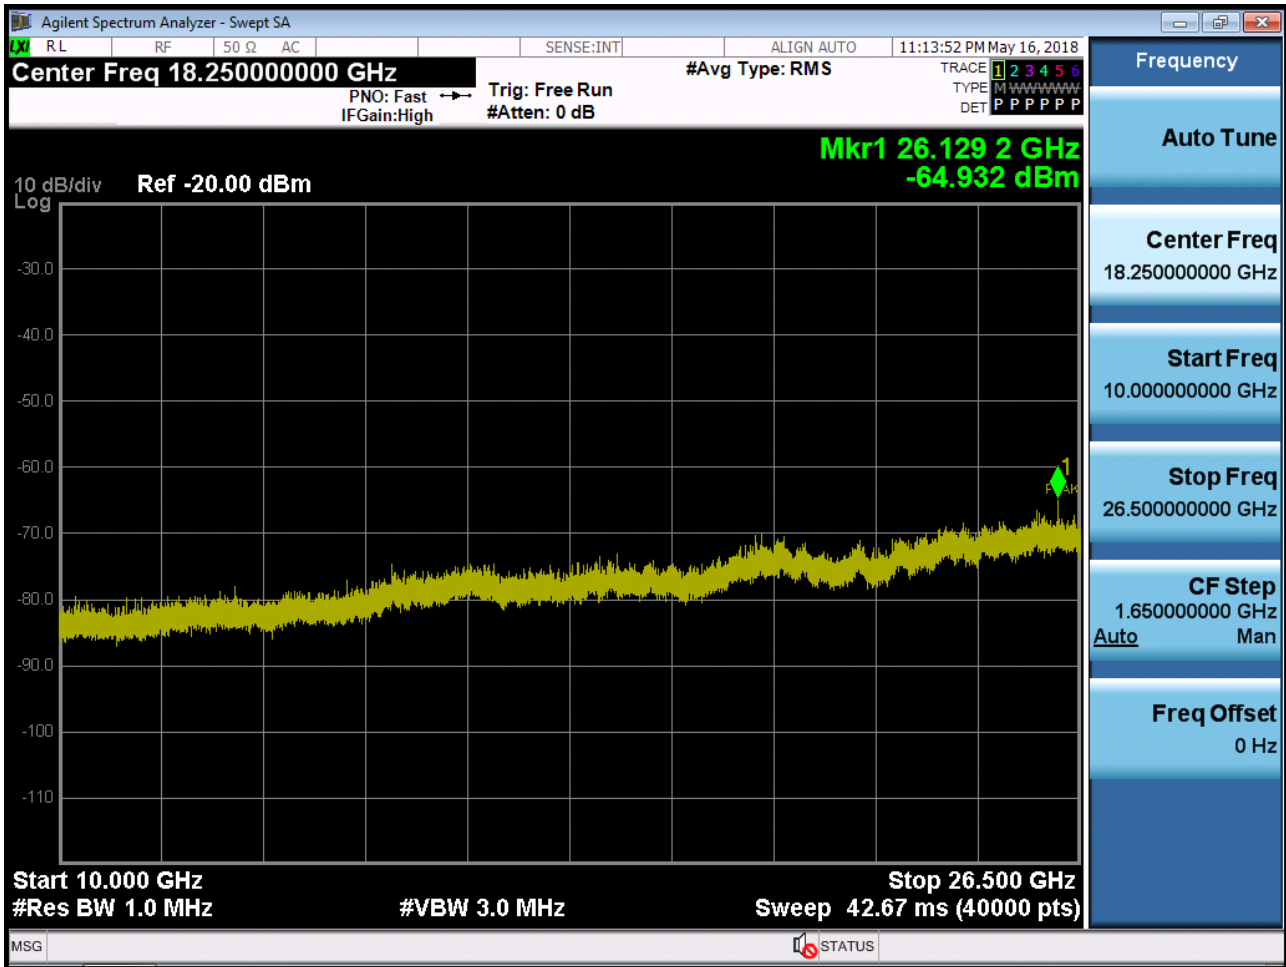


BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.39725 QPSK RB 1, Offset 0)

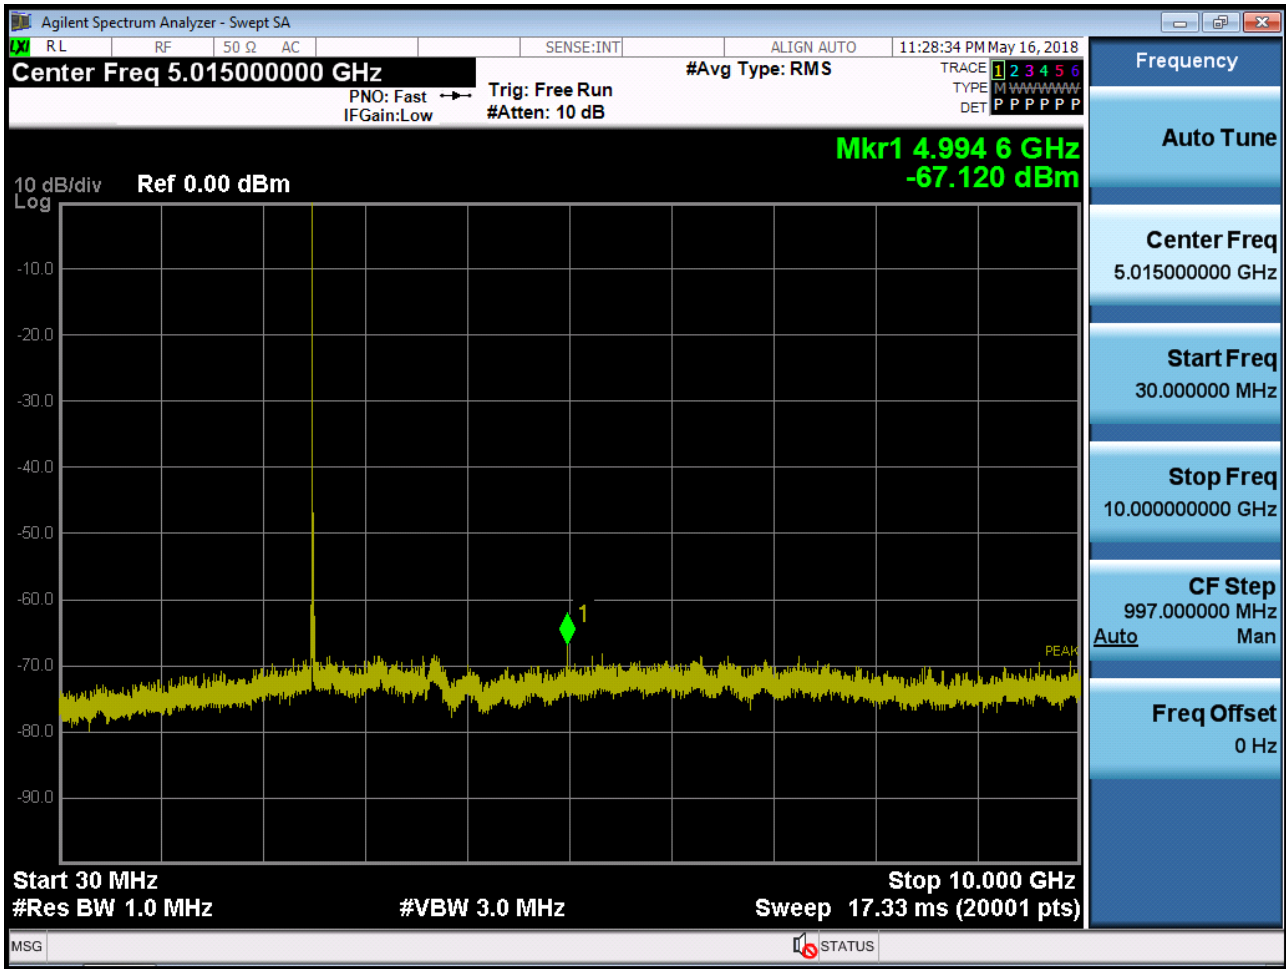


BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 39725 QPSK RB 1, Offset 0)

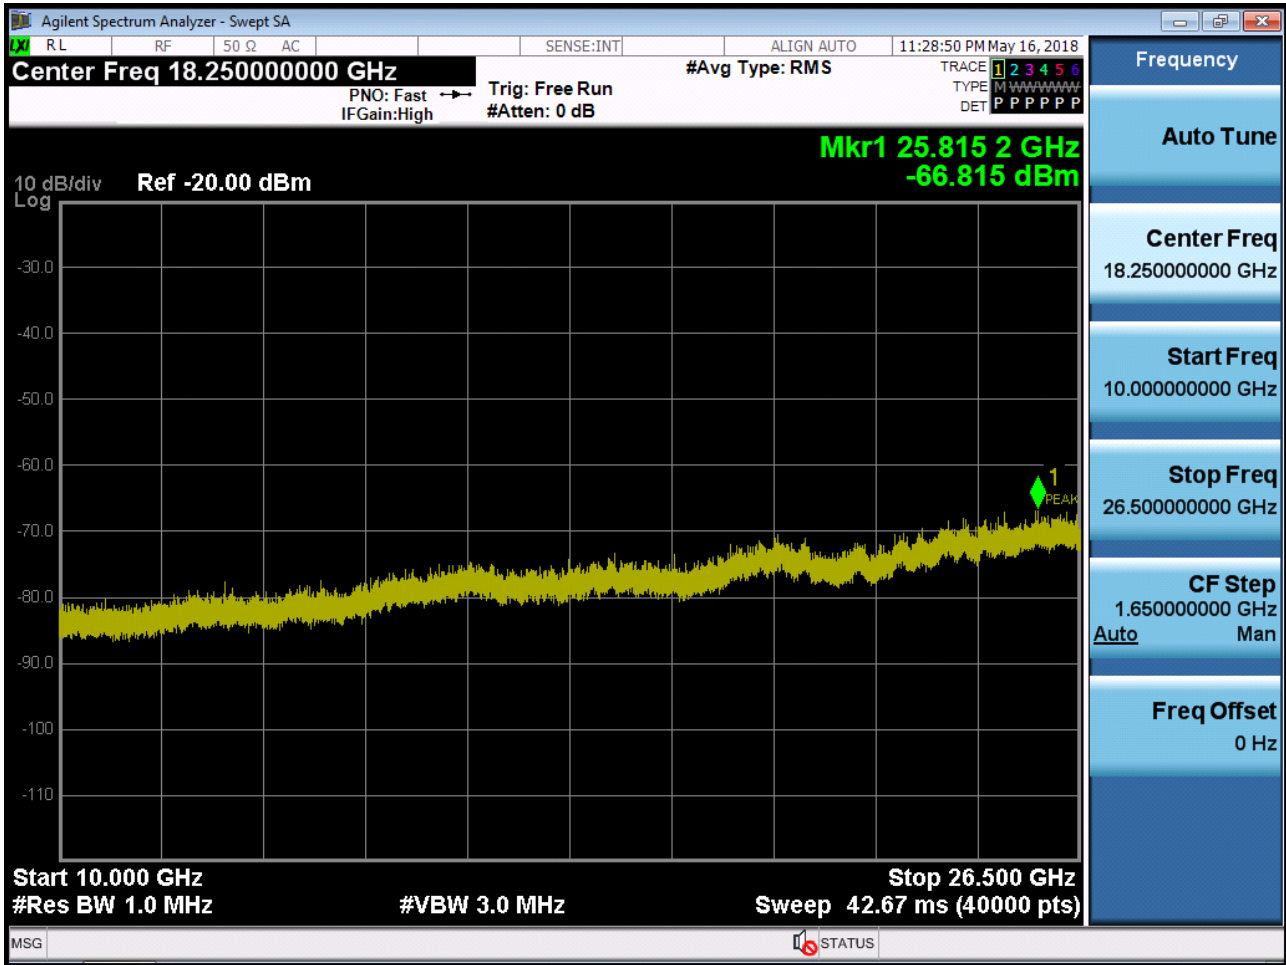


BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 40620 QPSK RB 1, Offset 0)

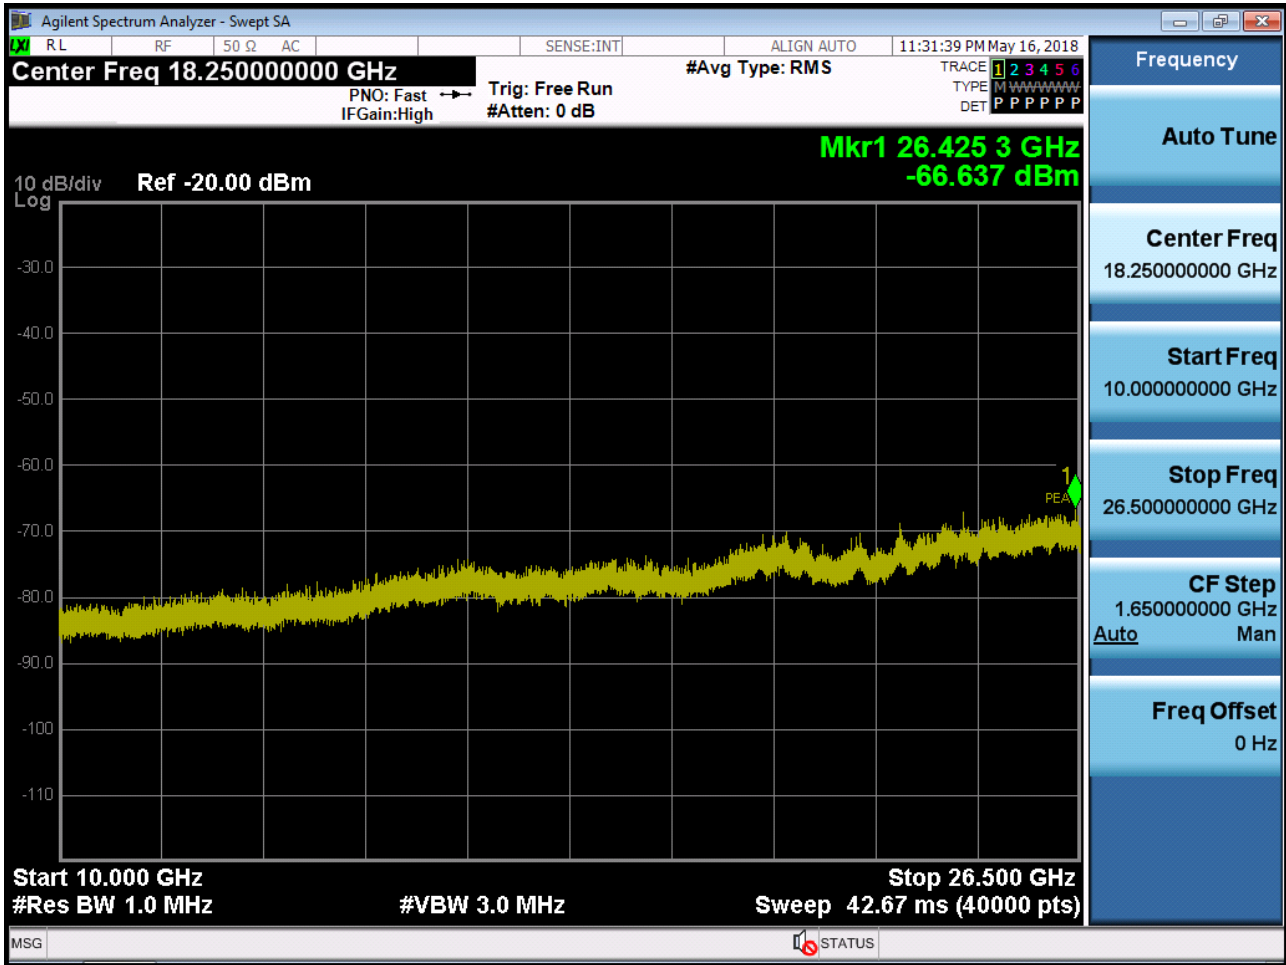


BAND 41. Conducted Spurious Plot 1 (15 MHz Ch.41515 QPSK RB 1, Offset 0)

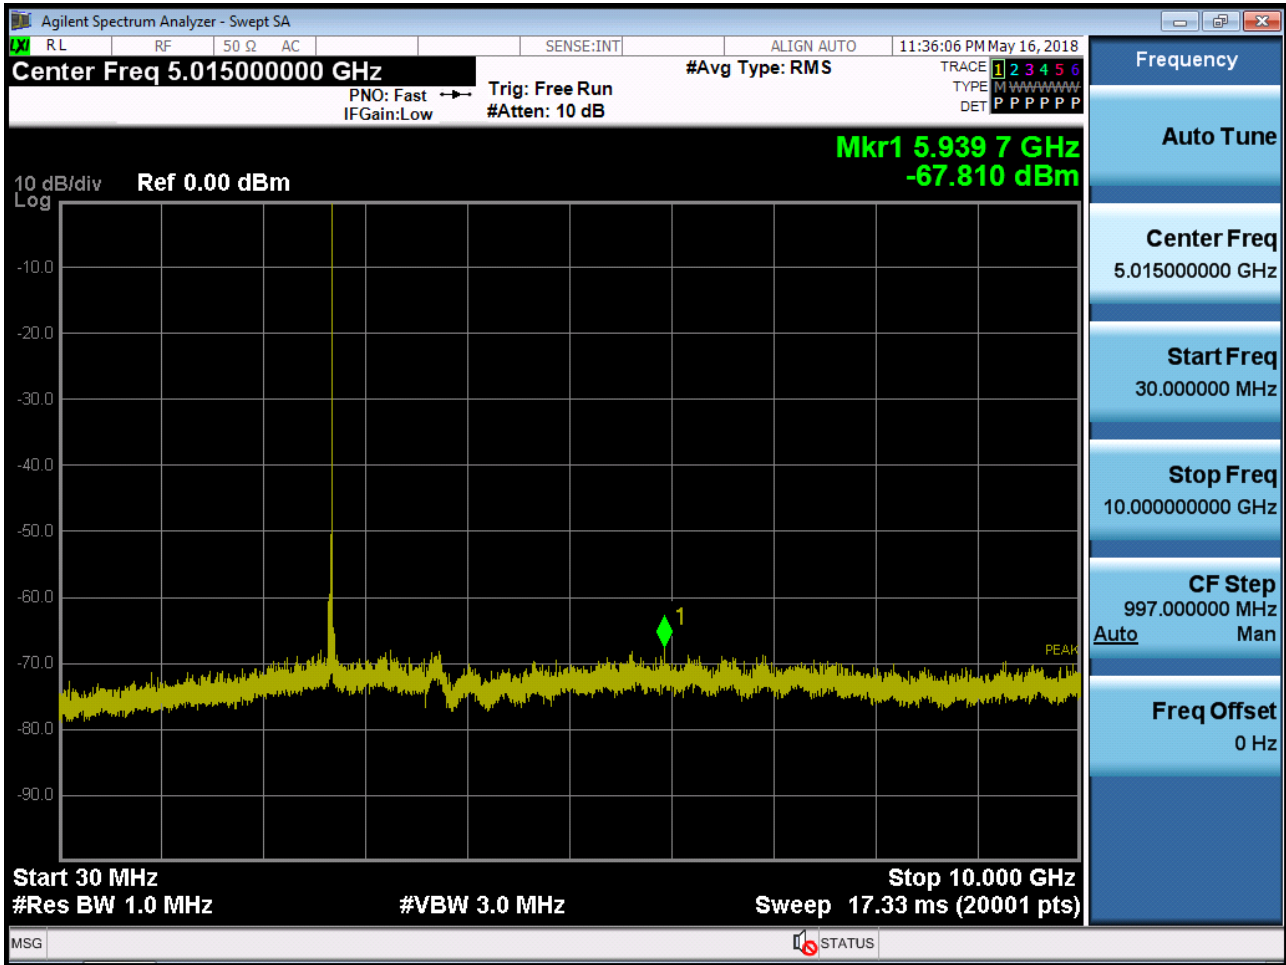


BAND 41. Conducted Spurious Plot 2 (15 MHz Ch. 41515 QPSK RB 1, Offset 0)

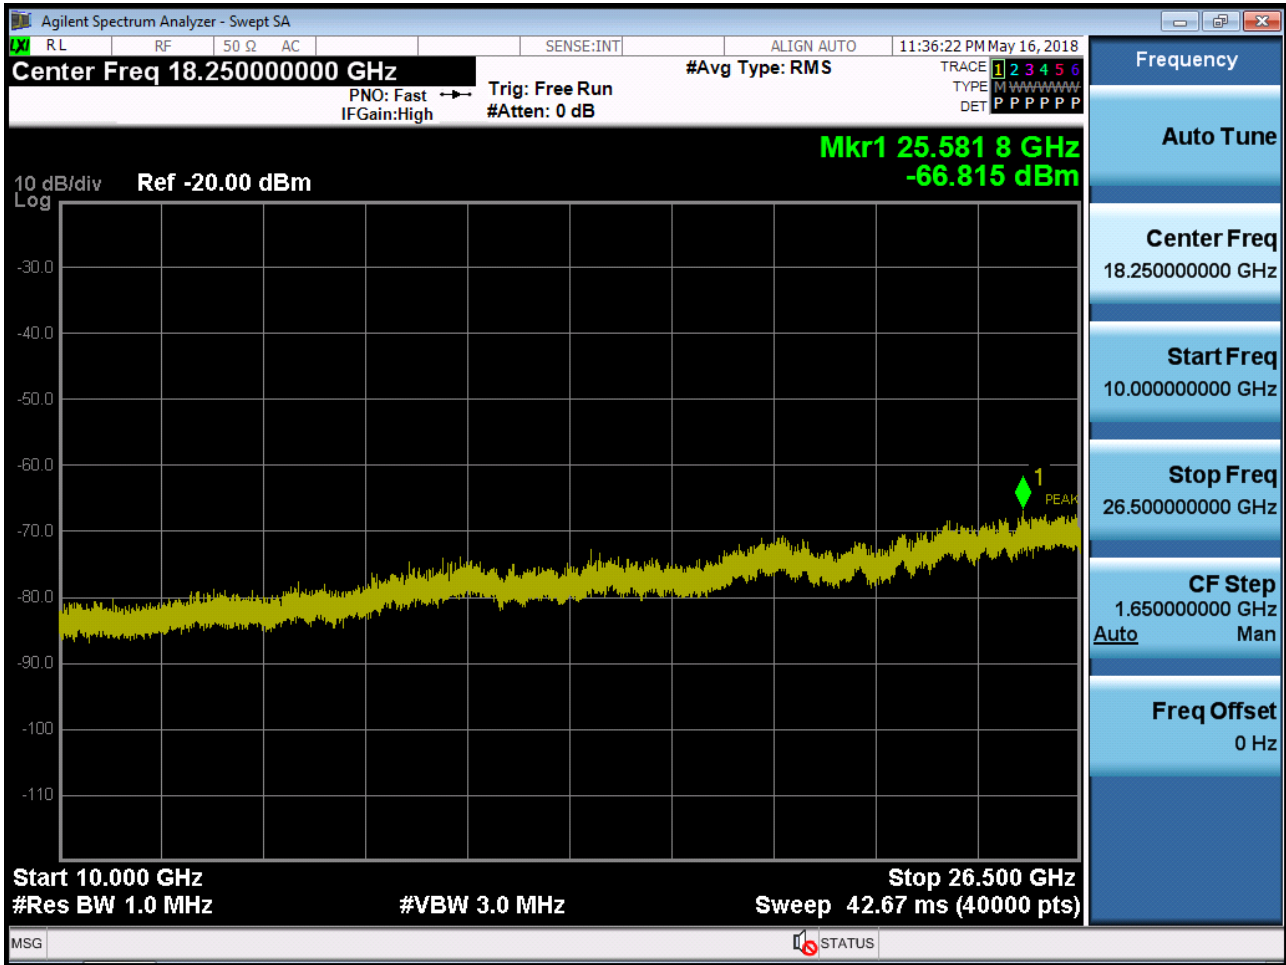


BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.39750 QPSK RB 1, Offset 0)

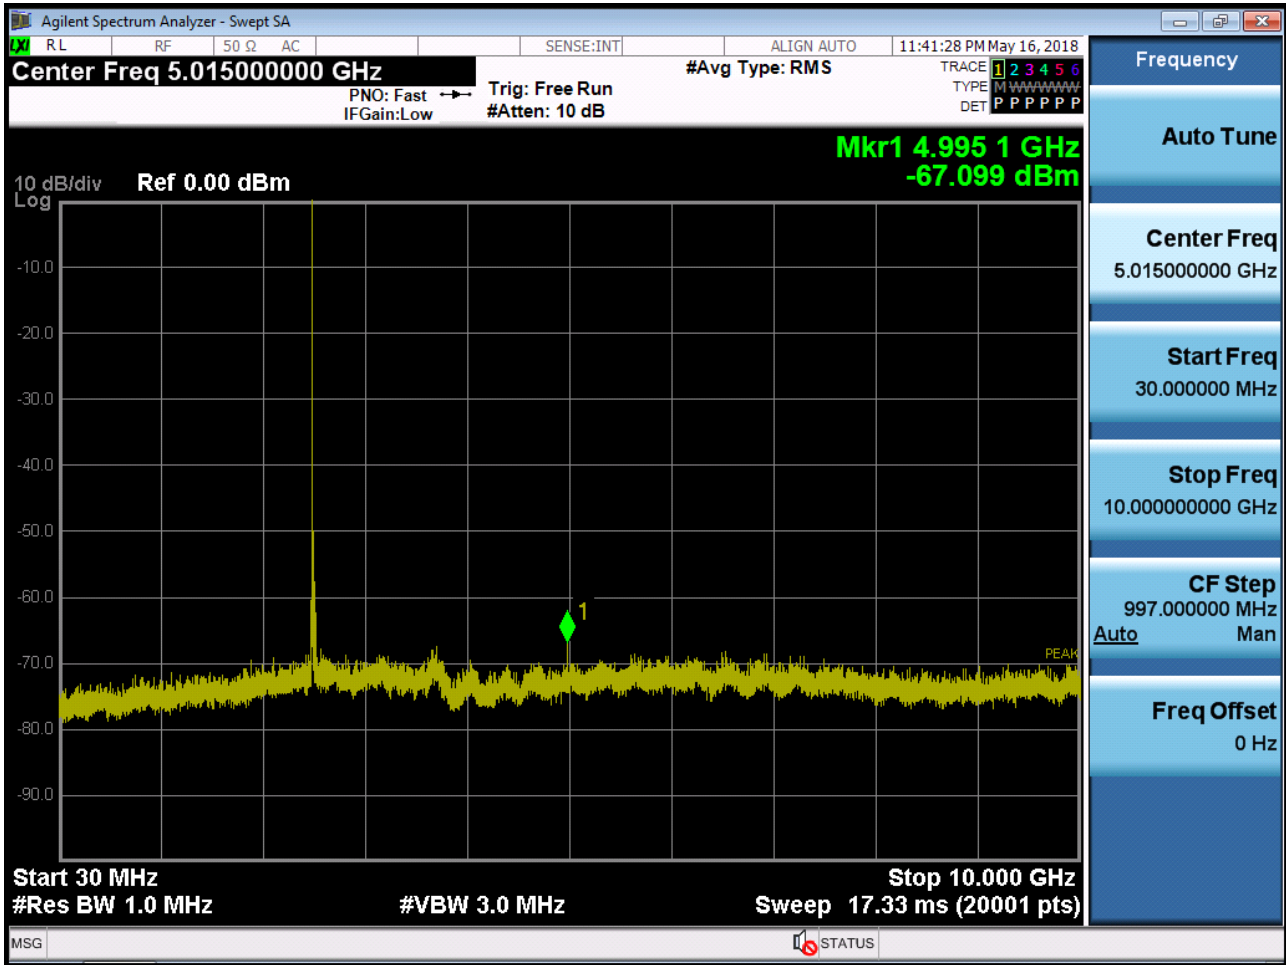


BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 39750 QPSK RB 1, Offset 0)

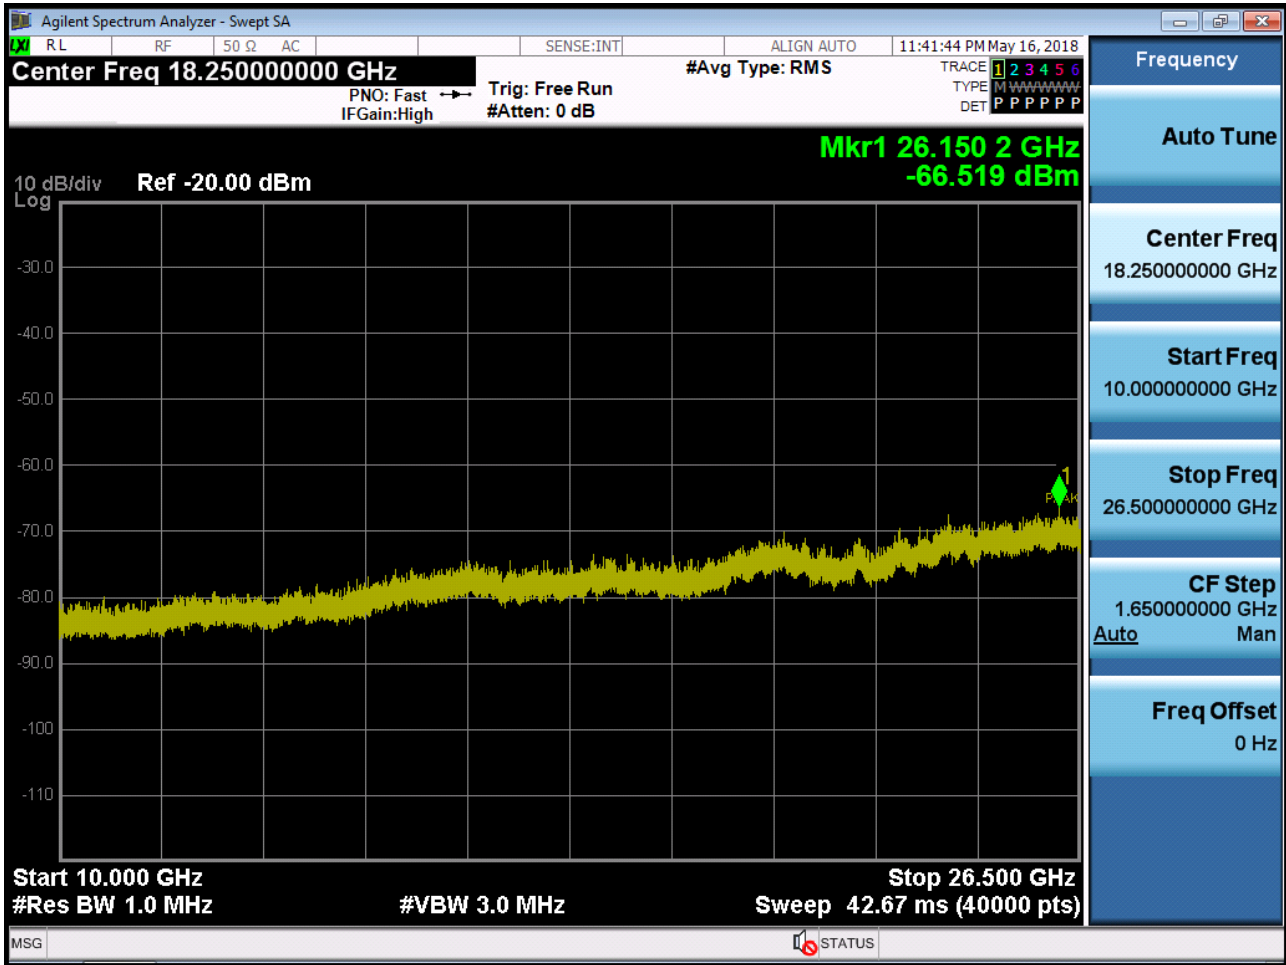

BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.40620 QPSK RB 1, Offset 0)

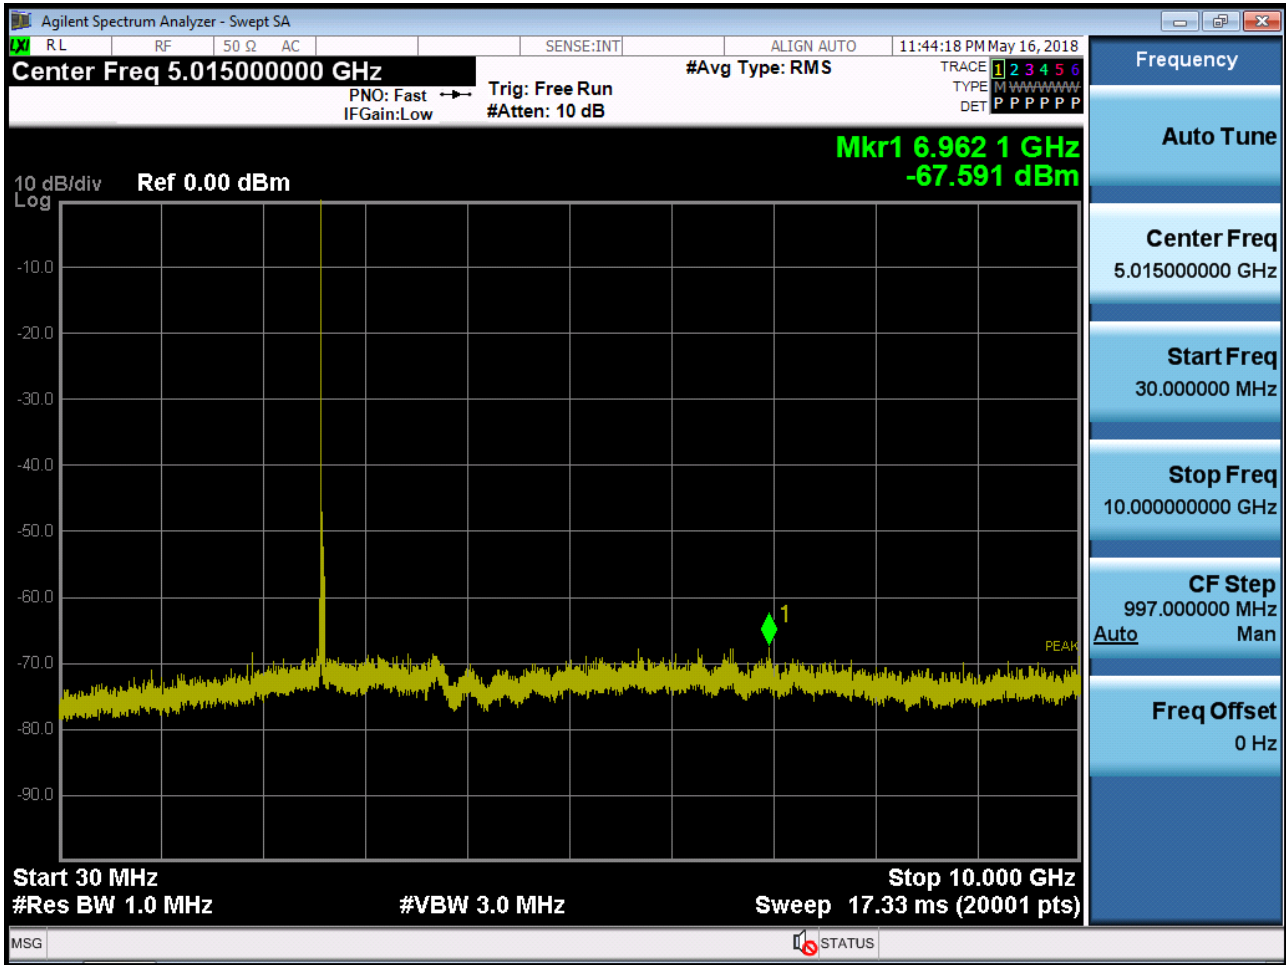

BAND 41. Conducted Spurious Plot 1 (20 MHz Ch.41490 QPSK RB 1, Offset 0)

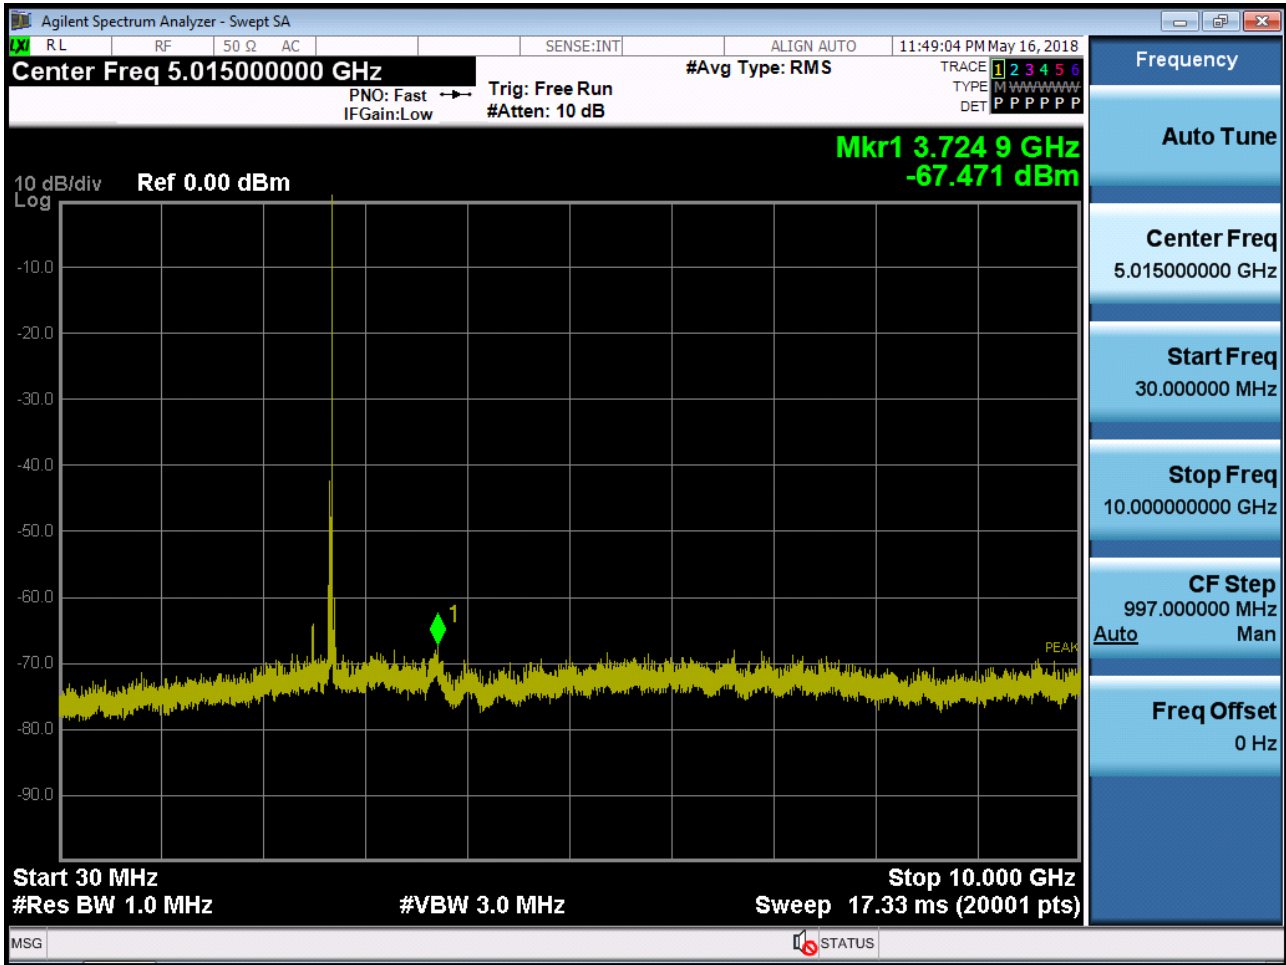

BAND 41. Conducted Spurious Plot 2 (20 MHz Ch. 41490 QPSK RB 1, Offset 0)

