

# FCC 2G, 3G REPORT

## Certification

**Applicant Name:**

SAMSUNG Electronics Co., Ltd.

**Date of Issue:**

December 26, 2018

**Location:**

HCT CO., LTD.,

**Address:**

129, Samsung-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

74, Seoicheon-ro 578beon-gil, Majang-myeon,  
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA

**Report No.:** HCT-RF-1812-FC021

**FCC ID:** A3LSMG887N

**APPLICANT:** SAMSUNG Electronics Co., Ltd.

**Model(s):** SM-G887N

**EUT Type:** Mobile Phone

**FCC Classification:** PCS Licensed Transmitter Held to Ear (PCE)

**FCC Rule Part(s):** §22, §24, §27, §2

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	ERP	
				Max. Power (W)	Max. Power (dBm)
WCDMA850	826.4 – 846.6	871.4 – 891.6	4M16F9W	0.036	15.52

Mode	Tx Frequency (MHz)	Rx Frequency (MHz)	Emission Designator	EIRP	
				Max. Power (W)	Max. Power (dBm)
GSM1900	1850.2 – 1909.8	1930.2 – 1989.8	246 KGXW	0.778	28.91
GSM1900 EDGE			250 KG7W	0.267	24.27
WCDMA1900	1852.4 – 1907.6	1932.4 – 1987.6	4M14F9W	0.145	21.62
WCDMA1700	1712.4 – 1752.6	2112.4 – 2152.6	4M15F9W	0.090	19.53

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S. C.853(a)



**Report prepared by : Jae Ryang Do**  
**Engineer of Telecommunication Testing Center**



**Report approved by : Jong Seok Lee**  
**Manager of Telecommunication Testing Center**

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

## Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-1812-FC021	December 26, 2018	- First Approval Report

# Table of Contents

1. GENERAL INFORMATION .....	4
2. INTRODUCTION .....	5
2.1. DESCRIPTION OF EUT .....	5
2.2. MEASURING INSTRUMENT CALIBRATION .....	5
2.3. TEST FACILITY .....	5
3. DESCRIPTION OF TESTS .....	6
3.1 TEST PROCEDURE .....	6
3.2 RADIATED POWER .....	7
3.3 RADIATED SPURIOUS EMISSIONS .....	8
3.4 PEAK- TO- AVERAGE RATIO .....	9
3.5 OCCUPIED BANDWIDTH. ....	11
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....	12
3.7 BAND EDGE .....	13
3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	14
3.9 WORST CASE(CONDUCTED TEST) .....	15
3.10 WORST CASE(RADIATED TEST).....	16
4. LIST OF TEST EQUIPMENT .....	17
5. MEASUREMENT UNCERTAINTY .....	18
6. SUMMARY OF TEST RESULTS .....	19
7. SAMPLE CALCULATION .....	20
8. TEST DATA .....	22
8.1 EFFECTIVE RADIATED POWER .....	22
8.2 EQUIVALENT ISOTROPIC RADIATED POWER .....	22
8.3 RADIATED SPURIOUS EMISSIONS .....	23
8.4 PEAK-TO-AVERAGE RATIO .....	27
8.5 OCCUPIED BANDWIDTH .....	28
8.6 CONDUCTED SPURIOUS EMISSIONS .....	29
8.7 BAND EDGE .....	29
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE .....	30
9. TEST PLOTS.....	40
10. APPENDIX A_ TEST SETUP PHOTO .....	107

# MEASUREMENT REPORT

## 1. GENERAL INFORMATION

<b>Applicant Name:</b>	SAMSUNG Electronics Co., Ltd.
<b>Address:</b>	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
<b>FCC ID:</b>	A3LSMG887N
<b>Application Type:</b>	Certification
<b>FCC Classification:</b>	PCS Licensed Transmitter Held to Ear (PCE)
<b>FCC Rule Part(s):</b>	§22, §24, §27, §2
<b>EUT Type:</b>	Mobile Phone
<b>Model(s):</b>	SM-G887N
<b>Tx Frequency:</b>	826.40 - 846.60 MHz (WCDMA850) 1 850.20 - 1 909.80 MHz (GSM1900) 1 852.4 – 1 907.6 MHz (WCDMA1900) 1 712.4 – 1 752.6 MHz (WCDMA1700)
<b>Rx Frequency:</b>	871.40 - 891.60 MHz (WCDMA850) 1 930.20 - 1 989.80 MHz (GSM1900) 1 932.4 – 1 987.6 MHz (WCDMA1900) 2 112.4 – 2 152.6 MHz (WCDMA1700)
<b>Date(s) of Tests:</b>	November 28, 2018 ~ December 11, 2018

## **2. INTRODUCTION**

### **2.1. DESCRIPTION OF EUT**

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE.  
It also supports IEEE 802.11/b/g/n (HT20), Bluetooth.

### **2.2. MEASURING INSTRUMENT CALIBRATION**

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

### **2.3. TEST FACILITY**

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.

### 3. DESCRIPTION OF TESTS

#### 3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4
Band Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - ANSI C63.26-2015 – Section 5.2.6(only GSM)
Frequency stability	- ANSI C63.26-2015 – Section 5.6
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI C63.26-2015 – Section 5.2 - ANSI/TIA-603-E-2016 – Section 2.2.17
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12

### 3.2 RADIATED POWER

#### Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

#### Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW  $\geq$  3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points > 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

#### Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where:  $P_d$  is the dipole equivalent power and  $P_g$  is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.

These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration

4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

### 3.3 RADIATED SPURIOUS EMISSIONS

#### **Test Overview**

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

#### **Test Settings**


1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW  $\geq 3 \times$  RBW
3. Span = 1.5 times the OBW
4. No. of sweep points  $> 2 \times$  span / RBW
5. Detector = Peak
6. Trace mode = Max Hold
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10<sup>th</sup> harmonics from 9 kHz.

#### **Test Note**

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin  $> 20$  dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.  
The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test dat



### 3.4 PEAK- TO- AVERAGE RATIO

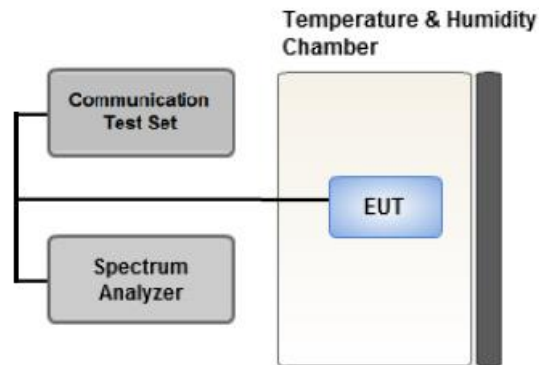

Test setup

#### ① CCDF Procedure for PAPR

##### Test Settings

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
  - .- for continuous transmissions, set to 1 ms,
  - .- or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1%.

## ② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as  $P_{Pk}$ .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as  $P_{Avg}$ . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk (dBm)} - P_{Avg (dBm)} \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

### Test Settings(Peak Power)


The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW  $\geq 3 \times$  RBW.

1. Set the RBW  $\geq$  OBW.
2. Set VBW  $\geq 3 \times$  RBW.
3. Set span  $\geq 2 \times$  OBW.
4. Sweep time  $\geq 10 \times$  (number of points in sweep)  $\times$  (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

### Test Settings(Average Power)

1. Set span to  $2 \times$  to  $3 \times$  the OBW.
2. Set RBW  $\geq$  OBW.
3. Set VBW  $\geq 3 \times$  RBW.
4. Set number of measurement points in sweep  $\geq 2 \times$  span / RBW.
5. Sweep time:  
Set  $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$  for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add  $[10 \log (1/\text{duty cycle})]$  to the measured maximum power level to compute the average power during continuous transmission. For example, add  $[10 \log (1/0.25)] = 6$  dB if the duty cycle is a constant 25%.

### 3.5 OCCUPIED BANDWIDTH.

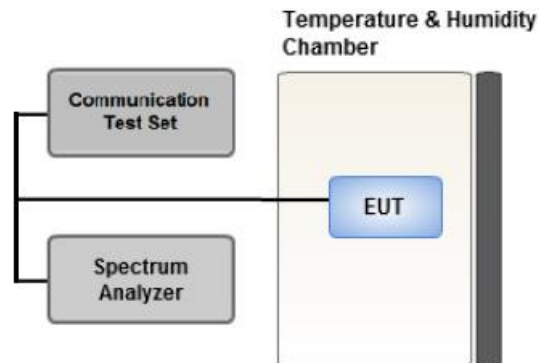

#### Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

#### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq$  3 x RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

### 3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

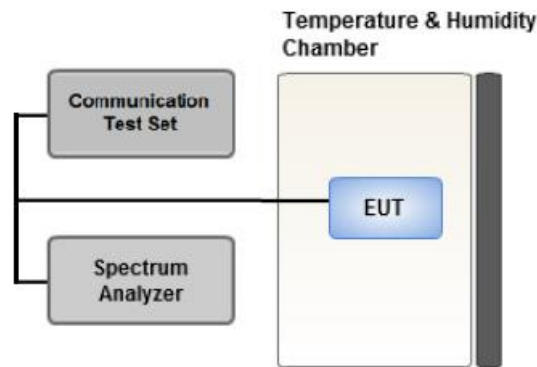

Test setup

#### Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


#### Test Settings(GSM)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = Peak
4. Trace Mode = max hold
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

#### Test Settings(WCDMA)

1. RBW = 1 MHz
2. VBW  $\geq$  3 MHz
3. Detector = RMS
4. Trace Mode = trace average
5. Sweep time = auto
6. Number of points in sweep  $\geq$  2 \* Span / RBW

### 3.7 BAND EDGE

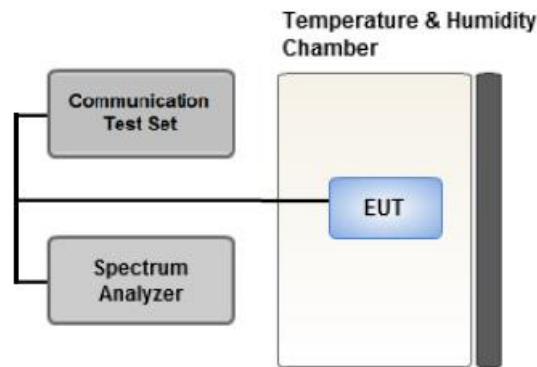

Test setup

#### Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

#### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


#### Test Notes

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

All measurements were done at 2 channels(low and high operational frequency range.)

The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

### 3.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

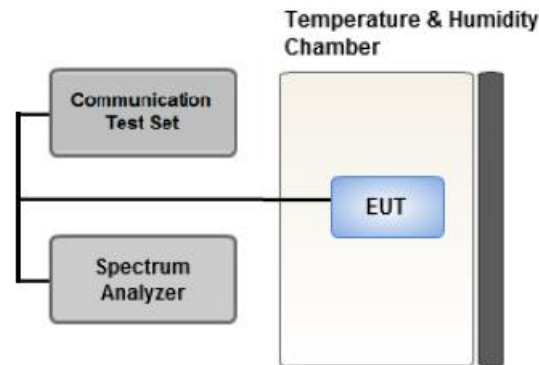

**Test setup**

#### **Test Overview**

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85% to 115% of the nominal value for other than hand carried battery equipment.

- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

#### **Test Settings**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**3.9 WORST CASE(CONDUCTED TEST)**

- All modes of operation were investigated and the worst case configuration results are reported.

[ Worst case ]

Test Description	Modulation	Test Channel
Occupied Bandwidth	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, Mid, High
	2G : EDGE(1 TX Slot)	Low, Mid, High
Band Edge	2G : Voice & EDGE(1 TX Slot) 3G : QPSK	Low, High
Spurious and Harmonic Emissions at Antenna Terminal	2G : Voice 3G : QPSK	Low, Mid, High

[ Test Channel ]

	UplinkChannel			
	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	512	9262	1312	4132
Mid	661	9400	1412	4183
High	810	9538	1513	4233

**3.10 WORST CASE(RADIATED TEST)**

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.
- The worst case is reported with the EUT positioning, modulations, and paging service configurations shown in the test data.
- Please refer to the table below.

[ Worst case\_3G ]

Test Description	Modulation	Paging Service	Axis	Test Channel
Effective Radiated Power, Effective Isotropic Radiated Power	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : Z WCDMA B4 : X WCDMA B5 : X	Low, Mid, High
Radiated Spurious and Harmonic Emissions	QPSK (WCDMA)	12.2 kbps RMC	WCDMA B2 : X WCDMA B4 : Y WCDMA B5 : X	Low, Mid, High

[ Worst case\_2G ]

Test Description	Mod	Axis	Test Channel
Effective Isotropic Radiated Power	Voice	GSM1900 : Z	Low, Mid, High
	EDGE(1 TX Slot)	GSM1900 : Z	GSM1900 : Mid
Radiated Spurious and Harmonic Emissions	Voice	GSM1900 : Y	Low, Mid, High

[ Test Channel ]

	UplinkChannel			
	2G (GSM1900)	3G (WCDMA B2)	3G (WCDMA B4)	3G (WCDMA B5)
Low	512	9262	1312	4132
Mid	661	9400	1412	4183
High	810	9538	1513	4233



## 4. LIST OF TEST EQUIPMENT

Manufacture	Model/ Equipment	Serial Number	Calibration Date	Calibration Interval	Calibration Due
REOHDE & SCHWARZ	SCU 18 / AMPLIFIER	10094	04/17/2018	Annual	04/17/2019
Wainwright	WHK1.2/15G-10EF/H.P.F	4	04/04/2018	Annual	04/04/2019
Wainwright	WHK3.3/18G-10EF/H.P.F	2	04/04/2018	Annual	04/04/2019
Hewlett Packard	11667B / Power Splitter(DC~26.5 GHz)	5001	06/07/2018	Annual	06/07/2019
Agilent	E3632A/DC Power Supply	KR75303243	05/09/2018	Annual	05/09/2019
Schwarzbeck	UHAP/ Dipole Antenna	557	03/31/2017	Biennial	03/31/2019
Schwarzbeck	UHAP/ Dipole Antenna	558	03/31/2017	Biennial	03/31/2019
ESPEC	SU-642 / Chamber	93000718	08/07/2018	Annual	08/07/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	147	09/14/2018	Annual	09/14/2019
Schwarzbeck	BBHA 9120D/ Horn Antenna(1~18GHz)	9120D-1298	10/04/2018	Annual	10/04/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170342	04/25/2017	Biennial	04/25/2019
Schwarzbeck	BBHA 9170/ Horn Antenna(15~40GHz)	BBHA9170124	04/25/2017	Biennial	04/25/2019
Agilent	N9020A/Signal Analyzer(10Hz~26.5GHz)	MY52090906	06/08/2018	Annual	06/08/2019
Hewlett Packard	8493C/ATTENUATOR(20dB)	17280	06/21/2018	Annual	06/21/2019
REOHDE & SCHWARZ	FSV40/Spectrum Analyzer(10Hz~40GHz)	100931	10/22/2018	Annual	10/22/2019
Agilent	8960 (E5515C)/ Base Station	MY48360800	09/27/2018	Annual	09/27/2019
Schwarzbeck	FMZB1513/ Loop Antenna(9kHz~30MHz)	1513-175	08/23/2018	Biennial	08/23/2020
Schwarzbeck	VULB9160/ Bilog Antenna	9160-3368	08/09/2018	Biennial	08/09/2020
Schwarzbeck	VULB9160/ Hybrid Antenna	760	04/06/2017	Biennial	04/06/2019
REOHDE & SCHWARZ	SMB100A/ SIGNAL GENERATOR (100kHz~40GHz)	177633	07/19/2018	Annual	07/19/2019
REOHDE & SCHWARZ	ESU40 / EMI TEST RECEIVER	100524	07/27/2018	Annual	07/27/2019
HCT CO., LTD.,	FCC LTE Mobile Conducted RF Automation Test Software	-	-	-	-

**Note:**

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014.

All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the  $U_{\text{CISPR}}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ( $\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.71

## 6. SUMMARY OF TEST RESULTS

### 6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10log10 (P[Watts]) at Band Edge and for all out-of-band emissions	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§24.232(d), §27.50(d)(5)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055, § 22.355	< 2.5 ppm	PASS
	§24.235, §27.54	Emission must remain in band	PASS

**Note:**

1. See SAR Report

### 6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Effective Radiated Power	§22.913(a)(5)	< 7 Watts max. ERP	PASS
Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	< 2 Watts max. EIRP < 1 Watts max. EIRP	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	< 43 + 10log10 (P[Watts]) for all out-of band emissions	PASS

## 7. SAMPLE CALCULATION

### 7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

#### ERP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

### 7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
20175	1,732.50	-15.75	18.45	9.90	1.76	H	0.456	26.59

#### EIRP = Substitute LEVEL(dBm) + Ant. Gain – CL(Cable Loss)

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter’s level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter’s level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

### 7.3. Emission Designator

#### GSM Emission Designator

**Emission Designator = 249KGXW**

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

#### EDGE Emission Designator

**Emission Designator = 249KG7W**

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

#### WCDMA Emission Designator

**Emission Designator = 4M17F9W**

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

#### QPSK Modulation

**Emission Designator = 4M48G7D**

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

#### 16QAM Modulation

**Emission Designator = 4M48W7D**

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

## 8. TEST DATA

### 8.1 EFFECTIVE RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBd)	C.L	Pol.	Limit	ERP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA850	4132	826.4	-35.32	26.09	-10.26	0.86	H	< 7.00	0.031	14.97
	4183	836.6	-35.70	26.60	-10.21	0.87	H		0.036	15.52
	4233	846.6	-36.43	25.91	-10.17	0.87	H		0.031	14.87

### 8.2 EQUIVALENT ISOTROPIC RADIATED POWER

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
GSM1900	512	1850.2	-12.54	19.50	10.27	1.34	V	< 2.00	0.696	28.43
	661	1880.0	-12.15	19.98	10.29	1.36	V		0.778	28.91
	810	1909.8	-14.82	17.71	10.31	1.37	V		0.462	26.65
EDGE	661	1880.0	-16.79	15.34	10.29	1.36	V		0.267	24.27

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1900	9262	1852.4	-19.35	12.69	10.27	1.34	V	< 2.00	0.145	21.62
	9400	1880.0	-19.93	12.20	10.29	1.36	V		0.130	21.13
	9538	1907.6	-21.29	11.24	10.31	1.37	V		0.104	20.18

Mode	Ch./ Freq.		Measured Level (dBm)	Substitute LEVEL (dBm)	Ant. Gain (dBi)	C.L	Pol.	Limit	EIRP	
	channel	Freq.(MHz)						W	W	dBm
WCDMA1700	1312	1712.4	-21.52	10.27	9.92	1.29	H	< 1.00	0.078	18.90
	1412	1732.4	-21.15	10.67	10.00	1.28	H		0.087	19.39
	1513	1752.6	-21.10	10.72	10.10	1.29	H		0.090	19.53

**8.3 RADIATED SPURIOUS EMISSIONS**

- MEASURED OUTPUT POWER: 28.91 dBm = 0.778 W
- MODULATION SIGNAL: GSM1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  41.91 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
512 (1850.2)	3,700.40	-56.35	12.51	-63.15	1.98	H	-52.62	81.53
	5,550.60	-56.86	13.62	-58.14	2.72	V	-47.24	76.16
	7,400.80	-57.51	11.50	-52.50	2.92	V	-43.92	72.84
661 (1880.0)	3,760.00	-56.95	12.40	-63.39	2.00	V	-52.99	81.90
	5,640.00	-57.17	13.78	-58.00	2.70	H	-46.92	75.83
	7,520.00	-58.02	11.57	-52.81	2.93	V	-44.17	73.08
810 (1909.8)	3,819.60	-57.53	12.52	-63.77	2.05	H	-53.30	82.21
	5,729.40	-57.65	13.69	-57.60	2.72	H	-46.63	75.54
	7,639.20	-56.69	11.99	-51.89	2.93	V	-42.83	71.74

- MEASURED OUTPUT POWER: 15.52 dBm = 0.036 W
- MODULATION SIGNAL: WCDMA850
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  28.52 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBd)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
4,132 (826.4)	1,652.80	-56.38	7.46	-65.27	1.27	H	-61.23	76.75
	2,479.20	-58.04	8.71	-64.41	1.60	V	-59.45	74.97
	3,305.60	-57.21	10.32	-63.24	1.87	H	-56.94	72.46
4,183 (836.6)	1,673.20	-57.92	7.53	-66.91	1.28	V	-62.81	78.33
	2,509.80	-57.61	8.83	-63.93	1.62	V	-58.87	74.39
	3,346.40	-57.34	10.51	-63.66	1.91	V	-57.21	72.73
4,233 (846.6)	1,693.20	-57.37	7.67	-66.40	1.28	V	-62.16	77.69
	2,539.80	-57.55	8.85	-63.33	1.61	H	-58.24	73.76
	3,386.40	-57.26	10.56	-63.54	1.93	V	-57.06	72.58



- MEASURED OUTPUT POWER: 21.62 dBm = 0.145 W
- MODULATION SIGNAL: WCDMA1900
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  34.62 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
9262 (1852.4)	3,704.80	-55.54	12.50	-62.17	1.99	V	-51.66	73.28
	5,557.20	-55.44	13.64	-56.68	2.71	H	-45.75	67.37
	7,409.60	-56.09	11.50	-50.80	2.93	V	-42.23	63.85
9400 (1880.0)	3,760.00	-56.46	12.40	-62.90	2.00	H	-52.50	74.12
	5,640.00	-56.31	13.78	-57.14	2.70	H	-46.06	67.68
	7,520.00	-58.04	11.57	-52.83	2.93	V	-44.19	65.81
9538 (1907.6)	3,815.20	-55.15	12.52	-61.52	2.06	V	-51.05	72.67
	5,722.80	-57.02	13.70	-56.71	2.72	V	-45.73	67.35
	7,630.40	-57.13	11.95	-52.32	2.98	V	-43.35	64.96

- MEASURED OUTPUT POWER: 19.53 dBm = 0.090 W
- MODULATION SIGNAL: WCDMA1700
- DISTANCE: 3 meters
- LIMIT:  $43 + 10 \log_{10}(W) =$  32.53 dBc

Ch.	Freq.(MHz)	<u>Measured</u> <u>Level</u> <u>[dBm]</u>	Ant. Gain (dBi)	<u>Substitute</u> <u>Level</u> <u>[dBm]</u>	C.L	Pol.	Result (dBm)	dBc
1312 (1712.4)	3,424.80	-57.47	12.69	-65.47	1.90	H	-54.68	74.21
	5,137.20	-55.93	12.75	-57.64	2.52	H	-47.41	66.94
	6,849.60	-53.61	12.52	-50.85	2.81	V	-41.14	60.67
1412 (1732.4)	3,464.80	-56.65	12.60	-64.24	1.97	V	-53.61	73.14
	5,197.20	-57.64	13.17	-59.55	2.54	V	-48.92	68.45
	6,929.60	-54.66	12.46	-51.33	2.83	H	-41.70	61.23
1513 (1752.6)	3,505.20	-56.67	12.44	-63.93	1.92	V	-53.41	72.94
	5,257.80	-56.34	13.48	-59.15	2.59	V	-48.26	67.79
	7,010.40	-57.87	12.24	-54.89	2.84	H	-45.49	65.02

**8.4 PEAK-TO-AVERAGE RATIO**

Band	Ch.	Measured P <sub>Pk</sub> (dBm)	Measured P <sub>Avg</sub> (dBm)	P <sub>Avg</sub> (Duty Cycle)			P.A.R. = P <sub>Pk</sub> - P <sub>Avg</sub> (dB)	Limit (dB)	Pass / Fail
				Tx <sub>Total</sub> (ms)	Tx <sub>On</sub> (ms)	Factor (dB)			
GSM1900	661	30.153	20.68	4.6160	0.5475	9.26	0.21	13	Pass
GSM1900 EDGE	661	30.169	20.18	4.616	0.5475	9.26	0.73		
WCDMA1900	9400	CCDF Procedure					3.26		
WCDMA1700	1412						3.02		

**Note:**

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 62 ~ 69.
2. Only GSM(include EDGE) Mode was tested by alternate procedure for PAPR

$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm)$  (P<sub>Avg</sub> = Average Power + Duty cycle Factor)

Duty cycle Factor =  $10 \log (1/x)$ ,  $x = Tx_{On} / Tx_{Total}$

## 8.5 OCCUPIED BANDWIDTH

Band	Channel	Frequency(MHz)	Data (GSM: kHz / WCDMA : MHz)
GSM1900	512	1,850.20	242.38
	661	1,880.00	241.25
	810	1,909.80	246.22
GSM1900 EDGE	661	1,880.00	244.90
WCDMA850	4132	826.40	4.1515
	4183	836.60	4.1552
	4233	846.60	4.1478
WCDMA1900	9262	1852.40	4.1341
	9400	1880.00	4.1422
	9538	1907.60	4.1374
WCDMA1700	1312	1712.40	4.1463
	1412	1732.40	4.1531
	1513	1752.60	4.1347

**Note:**

1. Plots of the EUT's Occupied Bandwidth are shown Page 41 ~ 53.

**8.6 CONDUCTED SPURIOUS EMISSIONS**

Band	Channel	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
GSM1900	512	19.89375	29.489	-53.239	-23.750	-13.00
	661	18.88947	29.489	-53.219	-23.730	
	810	16.67242	29.489	-53.621	-24.132	
WCDMA850	4132	3.7084	27.976	-77.272	-49.296	
	4183	3.6805	27.976	-77.166	-49.190	
	4233	3.6900	27.976	-77.370	-49.394	
WCDMA1900	9262	18.9155	29.489	-72.559	-43.070	
	9400	18.9192	29.489	-72.802	-43.313	
	9538	18.9020	29.489	-73.042	-43.553	
WCDMA1700	1712.4	18.90847	29.489	-72.919	-43.430	
	1732.4	18.91947	29.489	-72.616	-43.127	
	1752.6	18.89647	29.489	-72.800	-43.311	

**Note:**

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 106 ~ 129.
2. Result (dBm) = Measurement Maximum Data (dBm) + Factor (dB)
3. Factor(dB) = Cable Loss + Attenuator + Power Splitter

Frequency Range (GHz)	Factor [dB]
0.03 – 1	25.270
1 – 5	27.976
5 – 10	28.591
10 – 15	29.116
15 – 20	29.489
Above 20	30.131


**8.7 BAND EDGE**

- Plots of the EUT's Band Edge are shown Page 62 ~ 85.

**8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE**


- Mode: GSM1900
- OPERATING FREQUENCY: 1850,200,000 Hz
- CHANNEL: 512
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1850 200 028	0.0	0.000 000	0.0000
100%		-30	1850 200 059	30.4	0.000 002	0.0164
100%		-20	1850 200 060	31.1	0.000 002	0.0168
100%		-10	1850 200 042	13.3	0.000 001	0.0072
100%		0	1850 200 042	13.8	0.000 001	0.0074
100%		+10	1850 200 043	14.0	0.000 001	0.0076
100%		+30	1850 200 044	15.5	0.000 001	0.0084
100%		+40	1850 200 046	17.2	0.000 001	0.0093
100%		+50	1850 200 046	17.4	0.000 001	0.0094
Batt. Endpoint		3.600	+20	1850 200 049	20.2	0.000 001

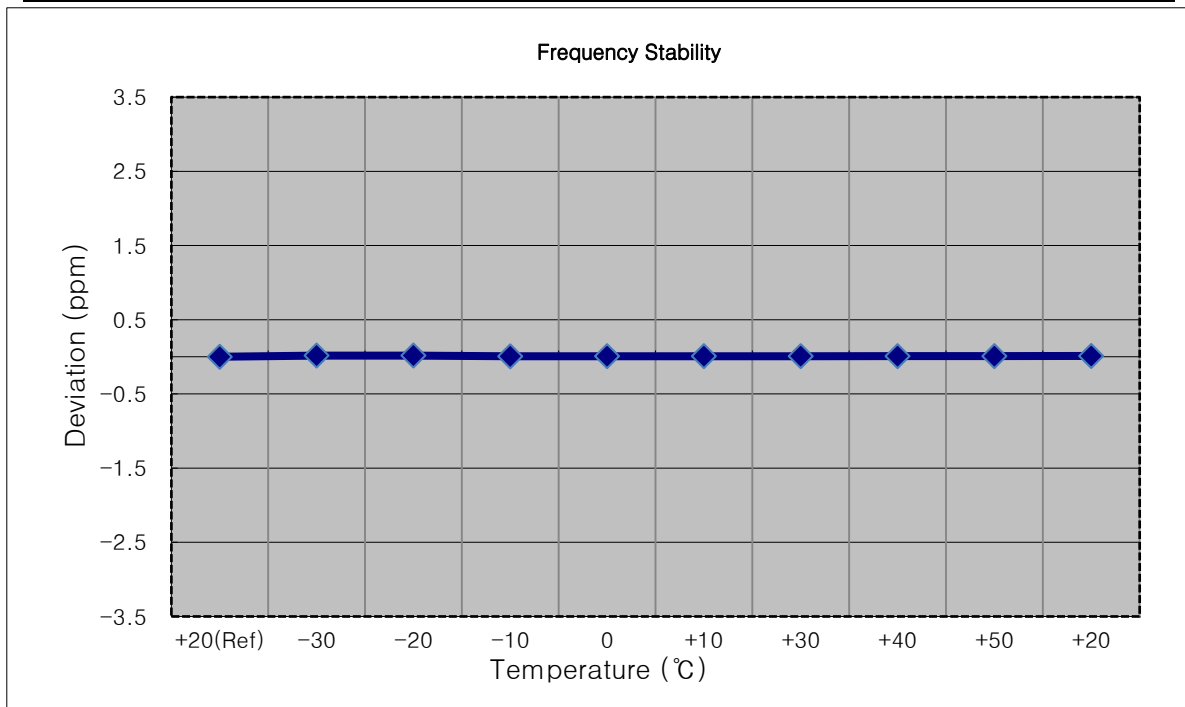


- Mode: GSM1900
- OPERATING FREQUENCY: 1880,000,000 Hz
- CHANNEL: 661
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1880 000 011	0.0	0.000 000	0.000
100%		-30	1880 000 025	13.9	0.000 001	0.007
100%		-20	1880 000 025	14.2	0.000 001	0.008
100%		-10	1880 000 027	15.4	0.000 001	0.008
100%		0	1880 000 029	17.7	0.000 001	0.009
100%		+10	1880 000 029	18.2	0.000 001	0.010
100%		+30	1880 000 030	19.0	0.000 001	0.010
100%		+40	1880 000 031	19.9	0.000 001	0.011
100%		+50	1880 000 030	19.1	0.000 001	0.010
Batt. Endpoint	3.600	+20	1880 000 030	18.7	0.000 001	0.010

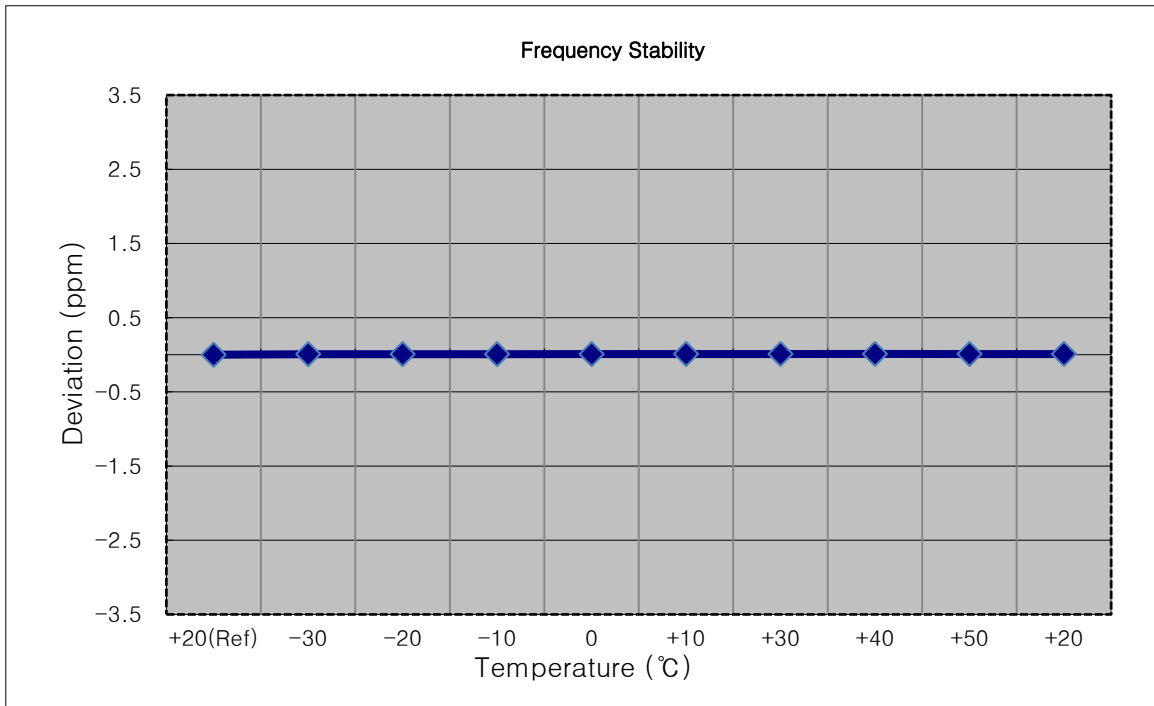

- Mode: GSM1900
- OPERATING FREQUENCY: 1909,800,000 Hz
- CHANNEL: 810
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1909 800 007	0.0	0.000 000	0.000
100%		-30	1909 800 014	6.5	0.000 000	0.003
100%		-20	1909 800 015	7.2	0.000 000	0.004
100%		-10	1909 800 013	5.8	0.000 000	0.003
100%		0	1909 800 013	5.5	0.000 000	0.003
100%		+10	1909 800 017	9.2	0.000 000	0.005
100%		+30	1909 800 014	6.8	0.000 000	0.004
100%		+40	1909 800 016	8.9	0.000 000	0.005
100%		+50	1909 800 015	7.1	0.000 000	0.004
Batt. Endpoint	3.600	+20	1909 800 017	9.3	0.000 000	0.005

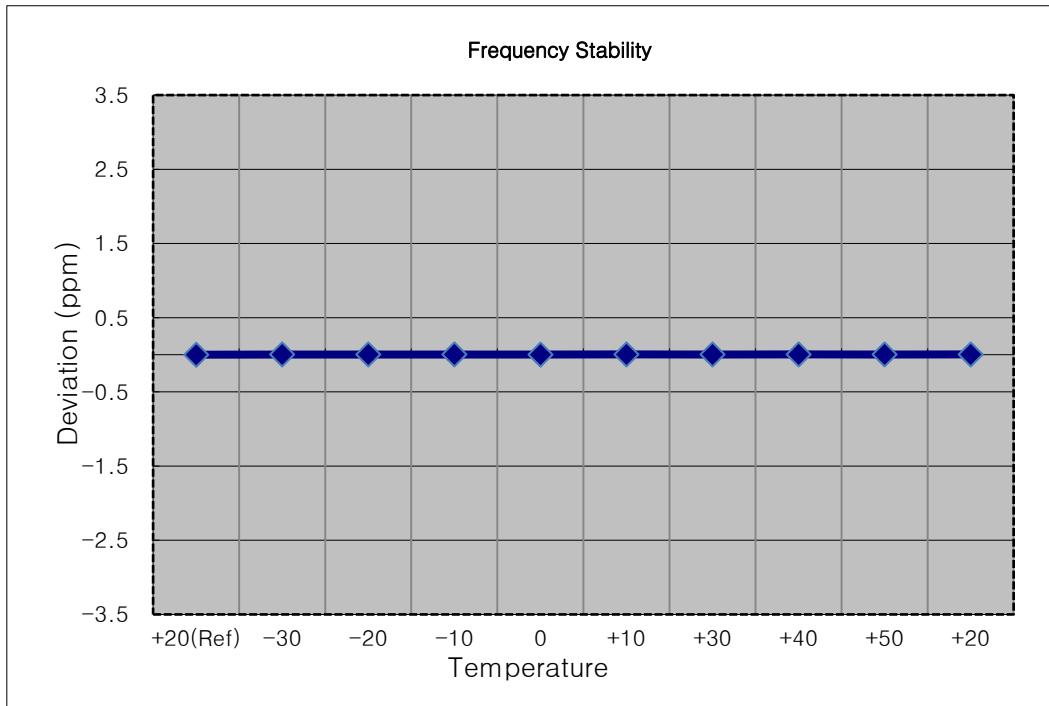




- Mode: WCDMA850
- OPERATING FREQUENCY: 836.600.000 Hz
- CHANNEL: 4183
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: ± 0.000 25 % or 2.5 ppm

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	836 599 998	0.0	0.000 000	0.0000
100%		-30	836 599 997	-1.2	0.000 000	-0.0014
100%		-20	836 599 997	-1.2	0.000 000	-0.0014
100%		-10	836 599 997	-1.3	0.000 000	-0.0015
100%		0	836 599 997	-1.6	0.000 000	-0.0019
100%		+10	836 599 997	-1.2	0.000 000	-0.0015
100%		+30	836 599 997	-0.9	0.000 000	-0.0011
100%		+40	836 599 997	-1.6	0.000 000	-0.0019
100%		+50	836 599 997	-1.4	0.000 000	-0.0017
Batt. Endpoint	3.600	+20	836 599 997	-1.6	0.000 000	-0.0020

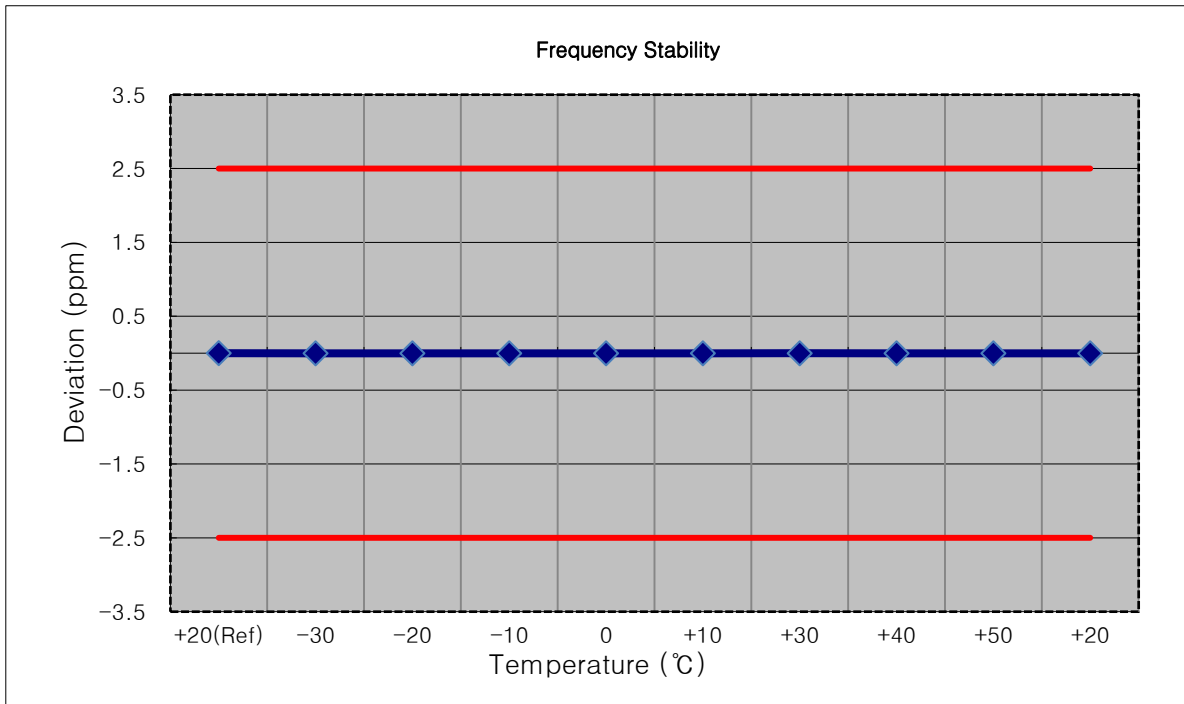


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,852,400,000 Hz
- CHANNEL: 9262
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1852 400 012	0.0	0.000 000	0.0000
100%		-30	1852 400 024	12.0	0.000 001	0.0065
100%		-20	1852 400 024	12.2	0.000 001	0.0066
100%		-10	1852 400 024	12.2	0.000 001	0.0066
100%		0	1852 400 023	11.6	0.000 001	0.0063
100%		+10	1852 400 024	12.3	0.000 001	0.0066
100%		+30	1852 400 024	12.1	0.000 001	0.0066
100%		+40	1852 400 025	12.8	0.000 001	0.0069
100%		+50	1852 400 023	11.7	0.000 001	0.0063
Batt. Endpoint		3.600	+20	1852 400 023	11.6	0.000 001

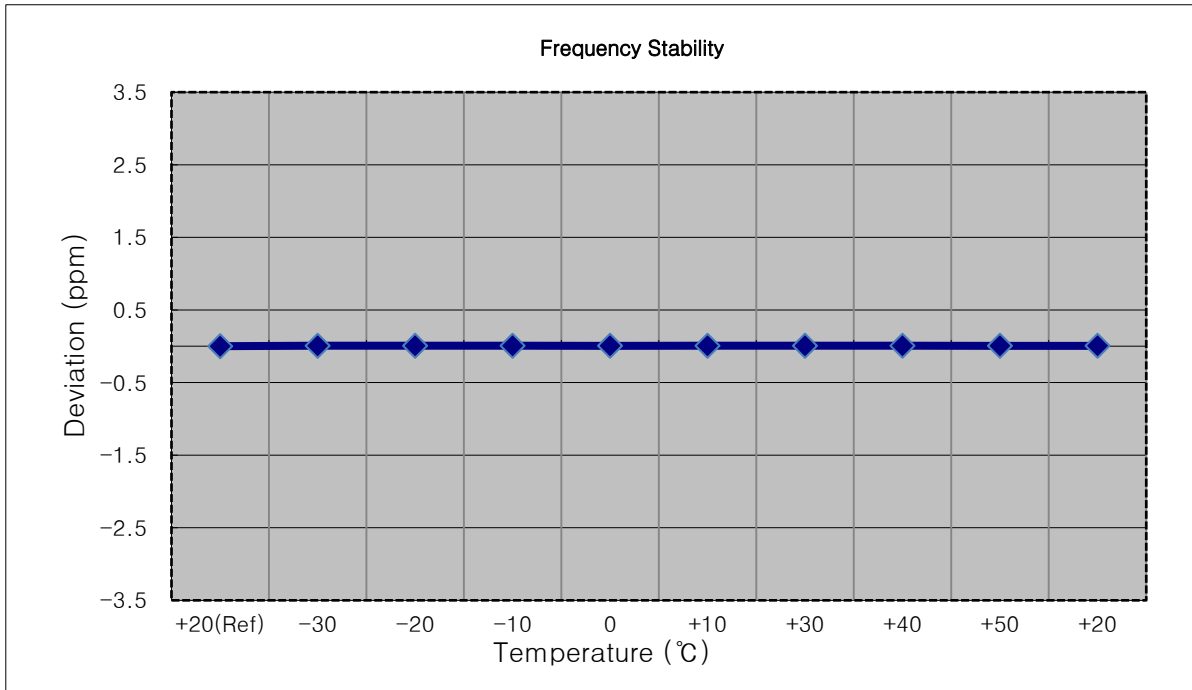


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,880,000,000 Hz
- CHANNEL: 9400
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1880 000 013	0.0	0.000 000	0.0000
100%		-30	1880 000 027	14.0	0.000 001	0.0074
100%		-20	1880 000 026	12.7	0.000 001	0.0068
100%		-10	1880 000 027	13.7	0.000 001	0.0073
100%		0	1880 000 026	12.8	0.000 001	0.0068
100%		+10	1880 000 026	12.7	0.000 001	0.0068
100%		+30	1880 000 026	13.2	0.000 001	0.0070
100%		+40	1880 000 026	13.0	0.000 001	0.0069
100%		+50	1880 000 026	13.1	0.000 001	0.0070
Batt. Endpoint	3.600	+20	1880 000 026	12.4	0.000 001	0.0066

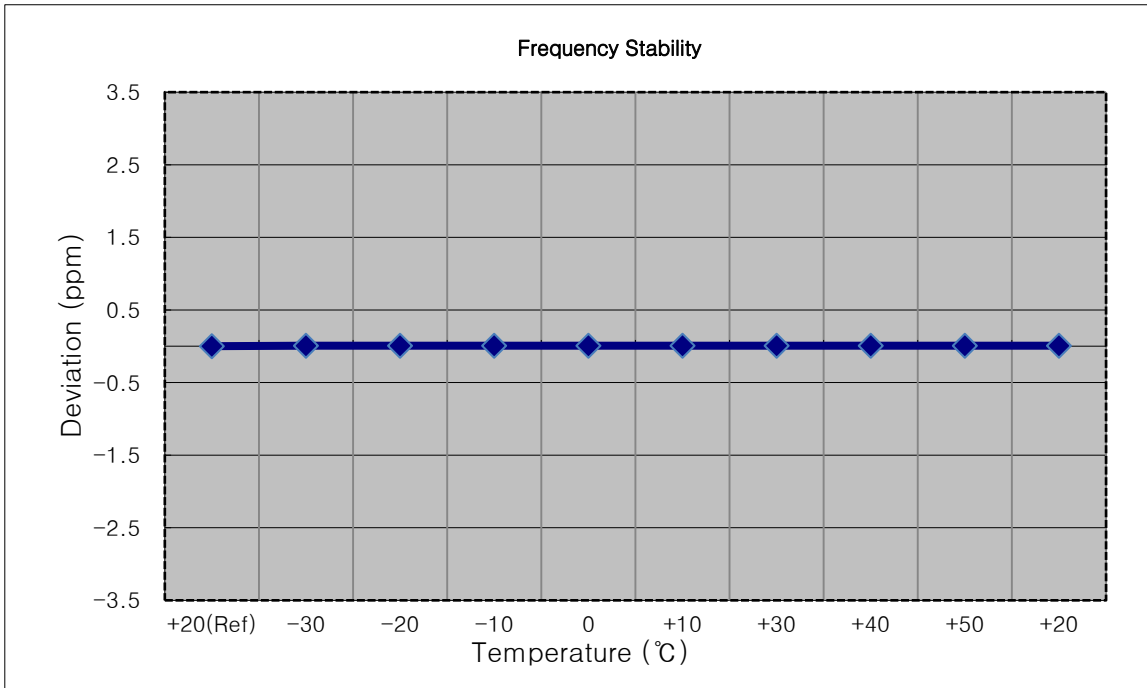


- Mode: WCDMA1900
- OPERATING FREQUENCY: 1,907,600,000 Hz
- CHANNEL: 9538
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1907 600 013	0.0	0.000 000	0.0000
100%		-30	1907 600 025	12.1	0.000 001	0.0063
100%		-20	1907 600 025	12.4	0.000 001	0.0065
100%		-10	1907 600 026	13.1	0.000 001	0.0069
100%		0	1907 600 025	12.0	0.000 001	0.0063
100%		+10	1907 600 026	13.2	0.000 001	0.0069
100%		+30	1907 600 025	12.5	0.000 001	0.0066
100%		+40	1907 600 026	13.7	0.000 001	0.0072
100%		+50	1907 600 025	12.2	0.000 001	0.0064
Batt. Endpoint		3.600	+20	1907 600 026	13.5	0.000 001

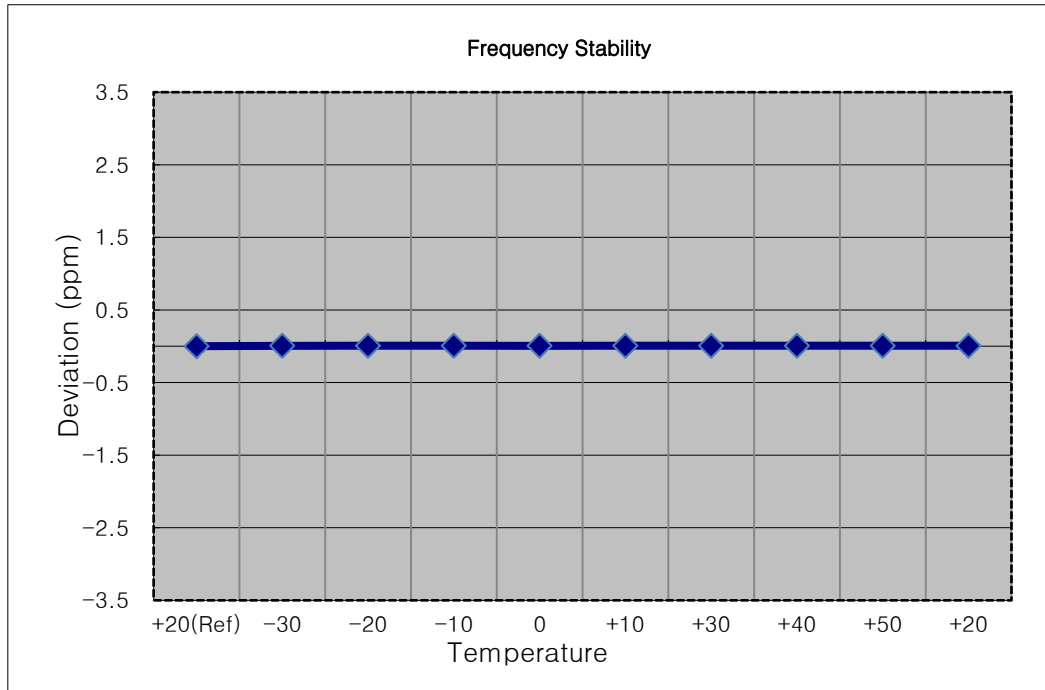


- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,712,400,000 Hz
- CHANNEL: 1312
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1712 400 009	0.0	0.000 000	0.0000
100%		-30	1712 400 017	8.7	0.000 001	0.0051
100%		-20	1712 400 018	9.0	0.000 001	0.0053
100%		-10	1712 400 018	9.5	0.000 001	0.0056
100%		0	1712 400 018	9.5	0.000 001	0.0055
100%		+10	1712 400 018	9.6	0.000 001	0.0056
100%		+30	1712 400 017	8.4	0.000 000	0.0049
100%		+40	1712 400 018	9.2	0.000 001	0.0054
100%		+50	1712 400 018	8.7	0.000 001	0.0051
Batt. Endpoint	3.600	+20	1712 400 019	10.4	0.000 001	0.0061

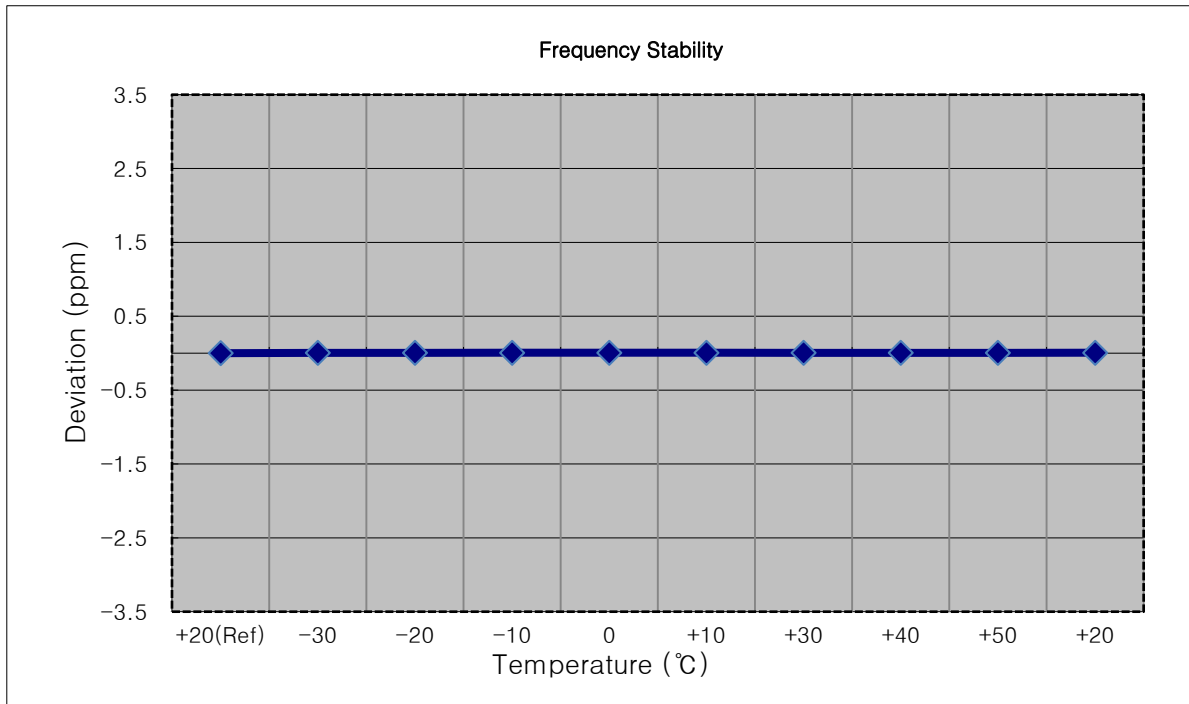


- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,732,400,000 Hz
- CHANNEL: 1412
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band

Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1732 400 007	0.0	0.000 000	0.0000
100%		-30	1732 400 014	7.3	0.000 000	0.0042
100%		-20	1732 400 014	6.8	0.000 000	0.0039
100%		-10	1732 400 013	6.4	0.000 000	0.0037
100%		0	1732 400 014	7.0	0.000 000	0.0041
100%		+10	1732 400 013	6.1	0.000 000	0.0035
100%		+30	1732 400 013	6.3	0.000 000	0.0037
100%		+40	1732 400 015	7.6	0.000 000	0.0044
100%		+50	1732 400 013	6.4	0.000 000	0.0037
Batt. Endpoint		3.600	+20	1732 400 014	7.4	0.000 000

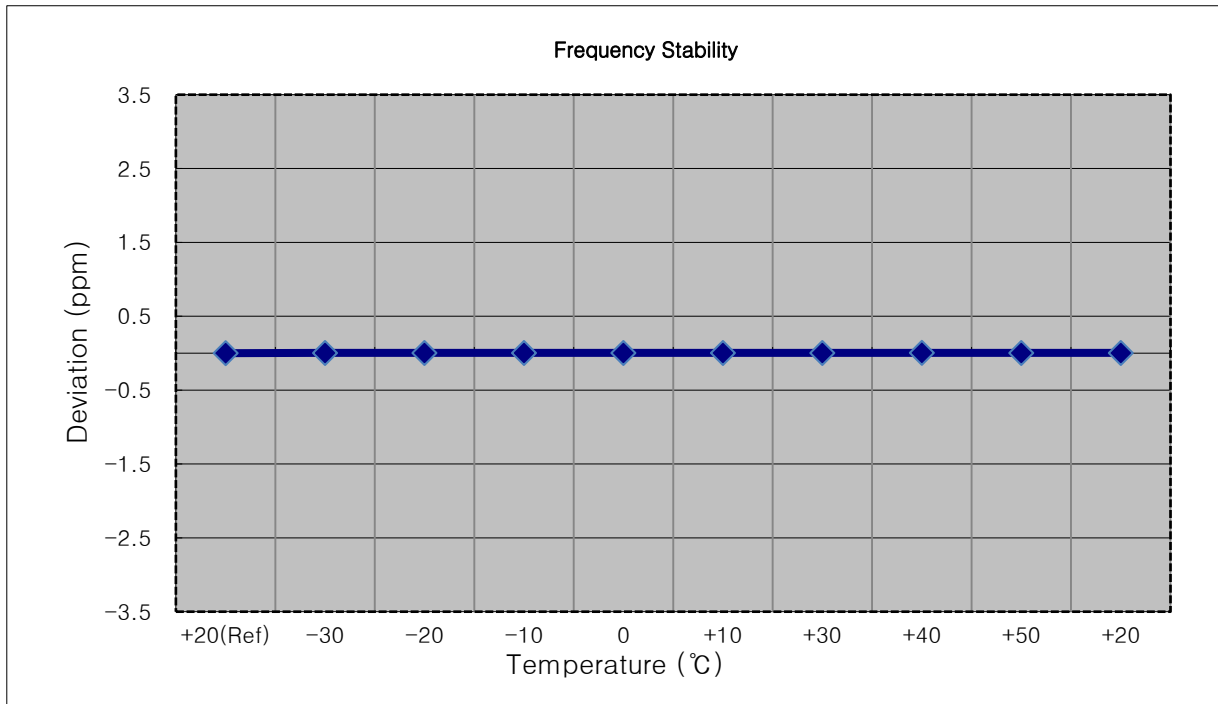

- Mode: WCDMA1700
- OPERATING FREQUENCY: 1,752,600,000 Hz
- CHANNEL: 1513
- REFERENCE VOLTAGE: 3.85 VDC
- DEVIATION LIMIT: Emission must remain in band


Voltage (%)	Power (VDC)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
100%	3.850	+20(Ref)	1752 600 003	0.0	0.000 000	0.0000
100%		-30	1752 600 006	3.0	0.000 000	0.0017
100%		-20	1752 600 005	2.9	0.000 000	0.0016
100%		-10	1752 600 006	3.4	0.000 000	0.0019
100%		0	1752 600 005	2.2	0.000 000	0.0012
100%		+10	1752 600 005	2.6	0.000 000	0.0015
100%		+30	1752 600 006	3.4	0.000 000	0.0019
100%		+40	1752 600 005	2.7	0.000 000	0.0016
100%		+50	1752 600 005	2.6	0.000 000	0.0015
Batt. Endpoint	3.600	+20	1752 600 005	2.3	0.000 000	0.0013

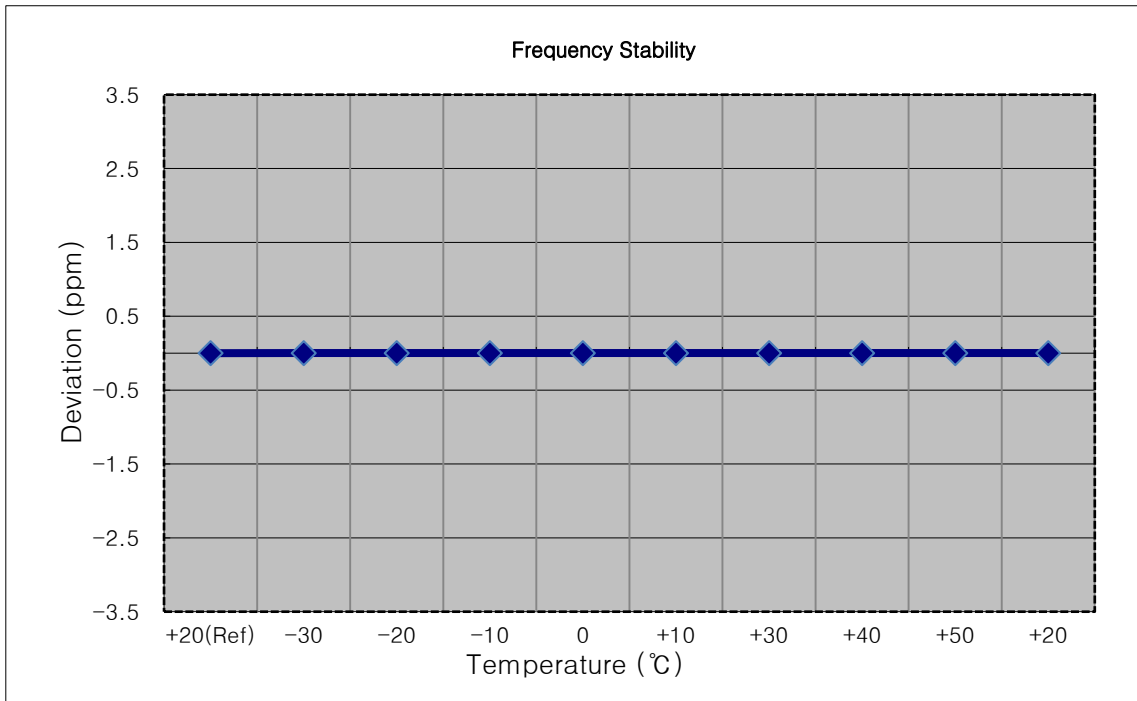


## 9. TEST PLOTS




■ GSM1900 MODE (512 CH.) Occupied Bandwidth

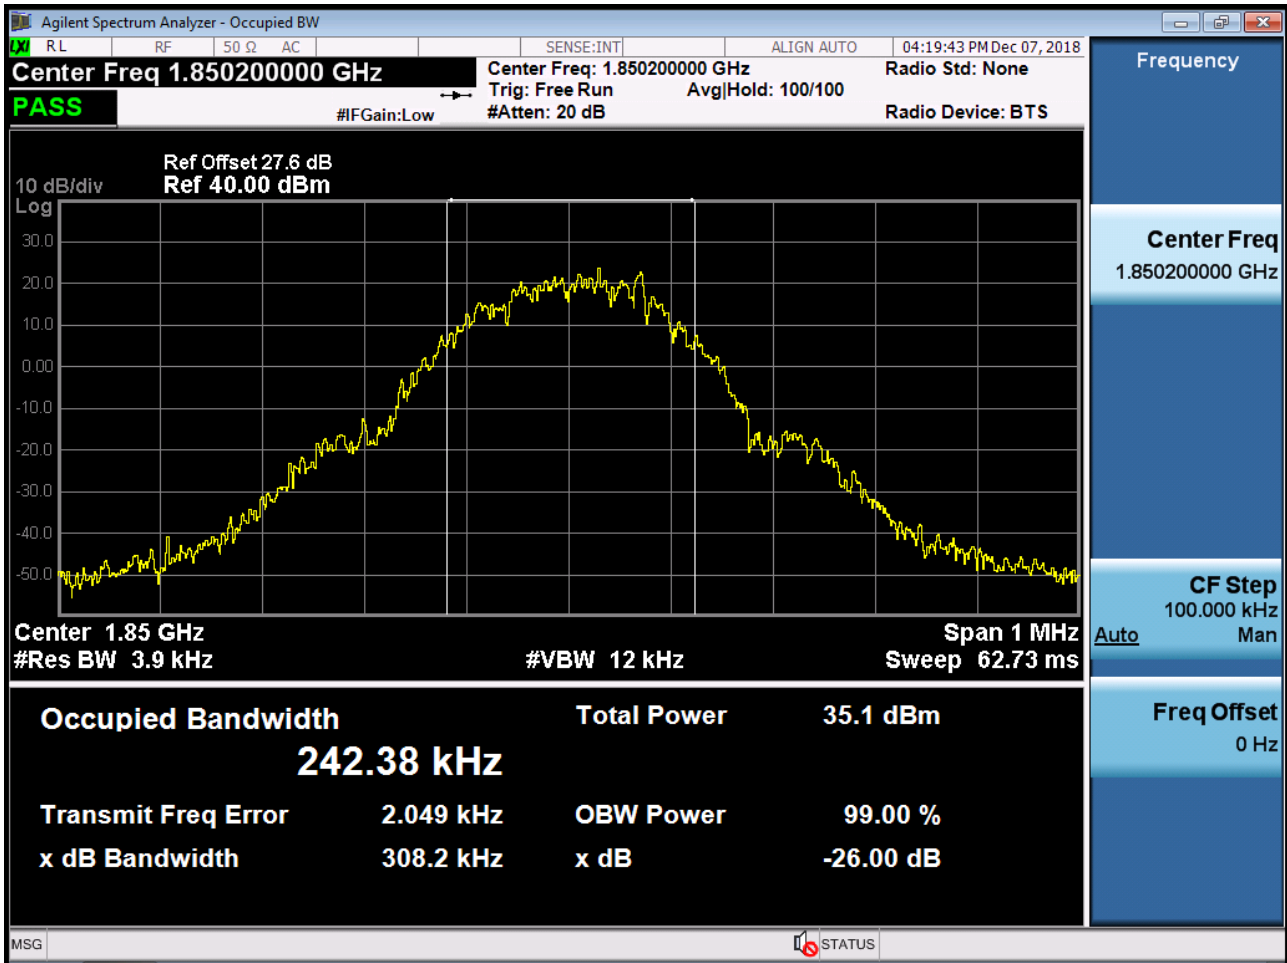


■ GSM1900 MODE (661 CH.) Occupied Bandwidth

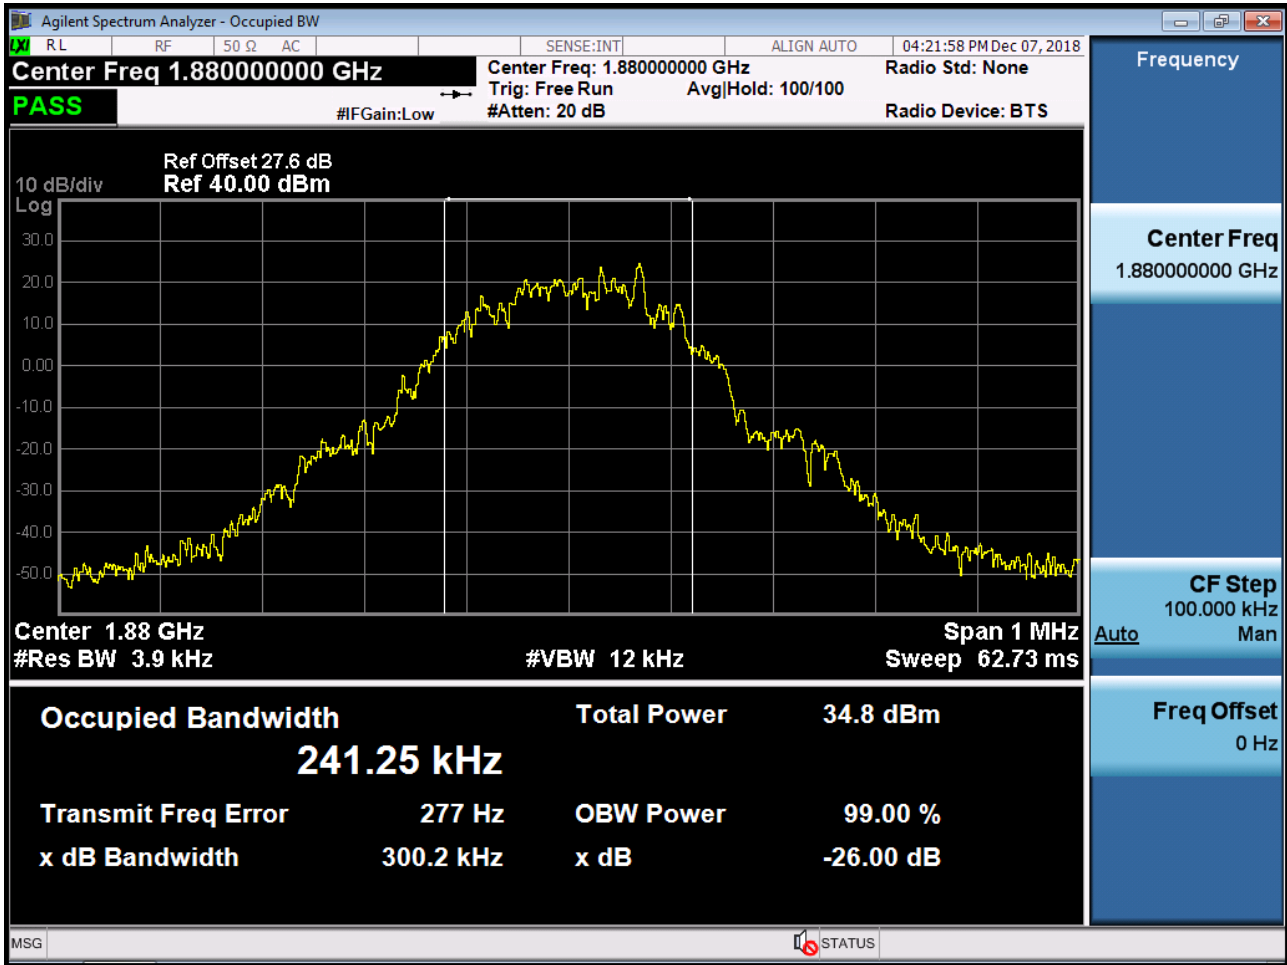


■ GSM1900 MODE (810 CH.) Occupied Bandwidth

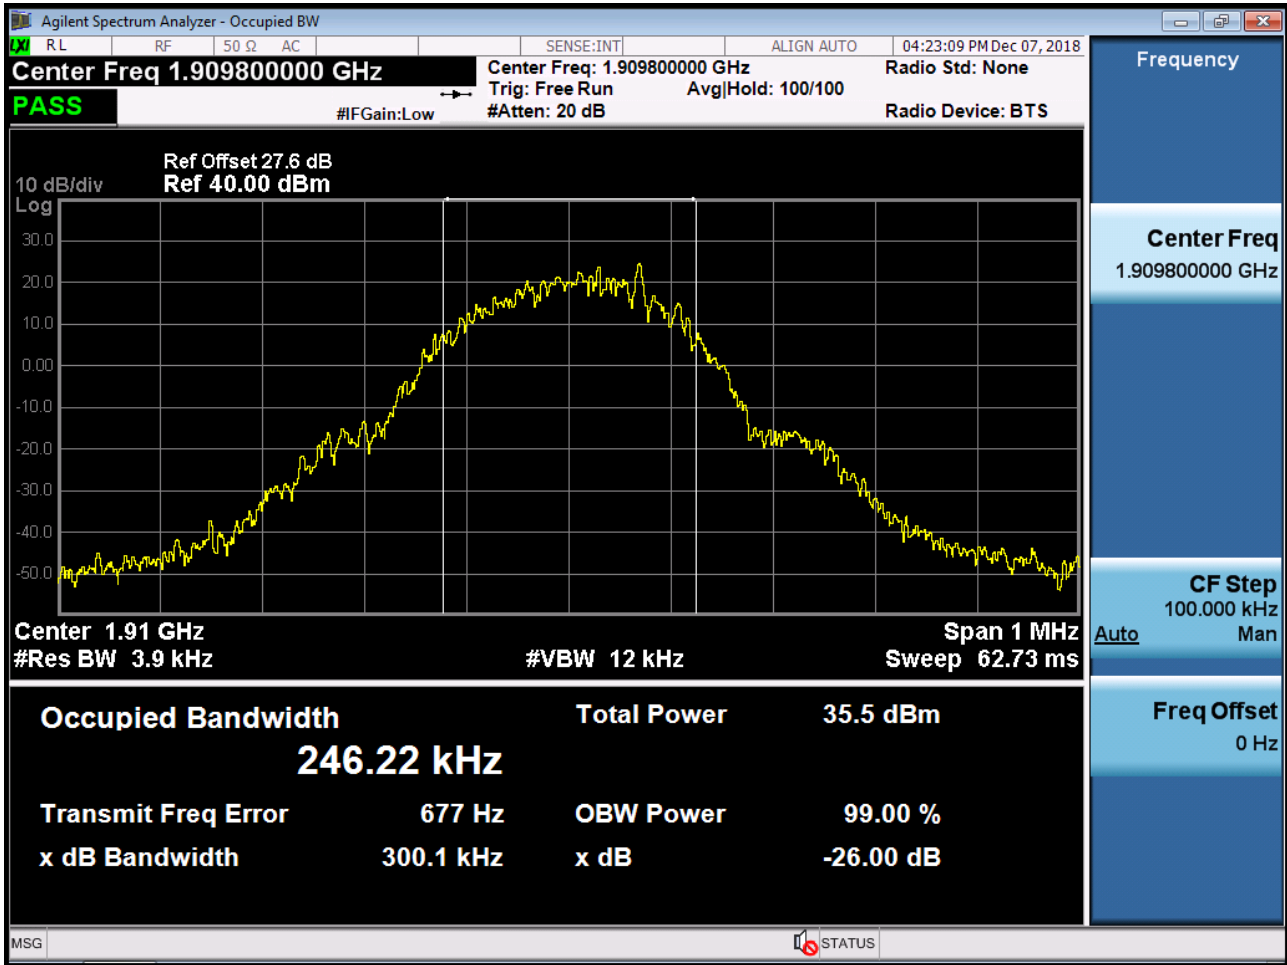


■ GSM1900 EDGE (661 CH.) Occupied Bandwidth

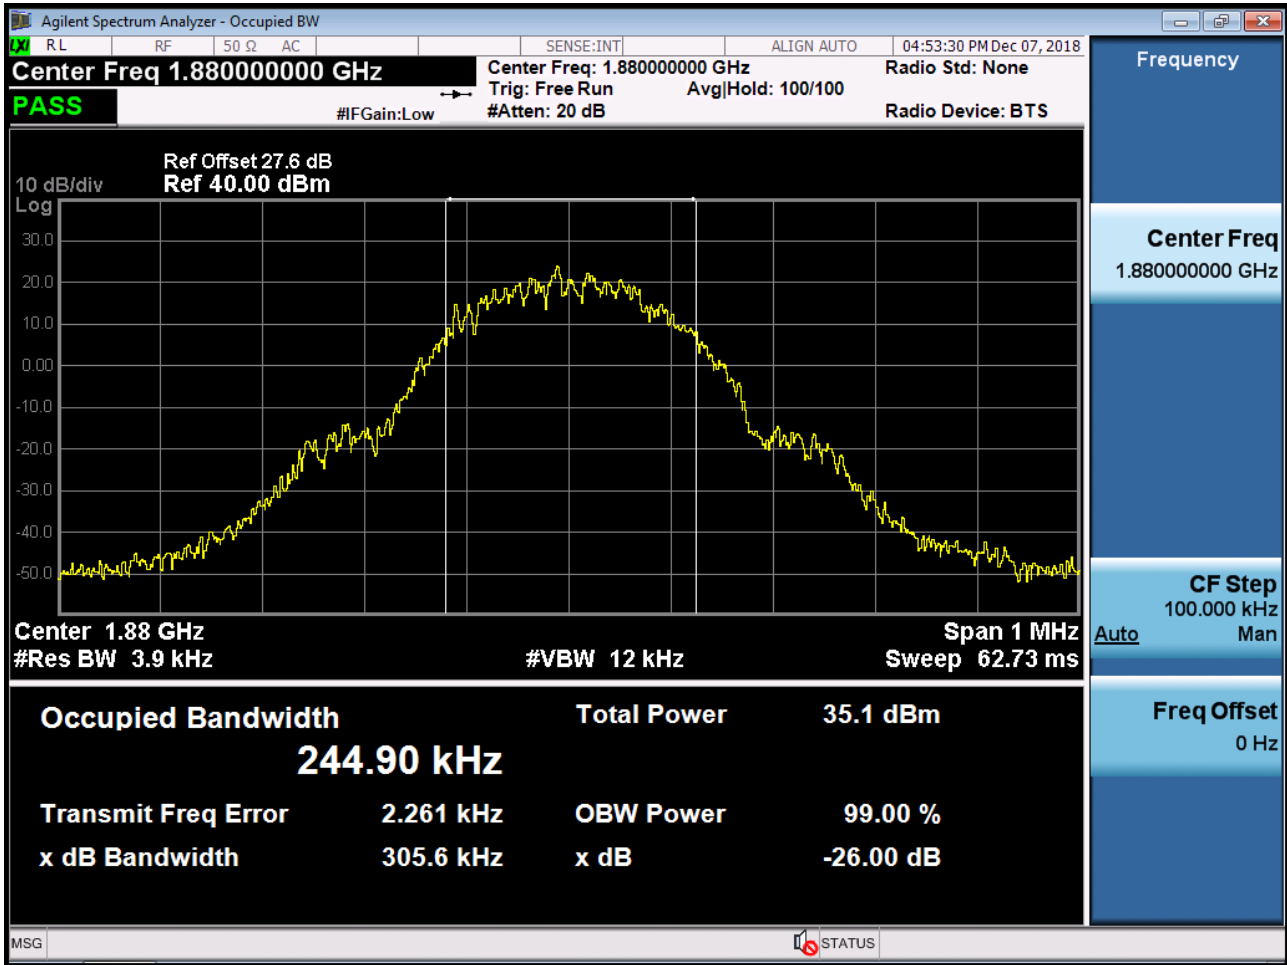


■ WCDMA850 MODE (4132 CH.) Occupied Bandwidth

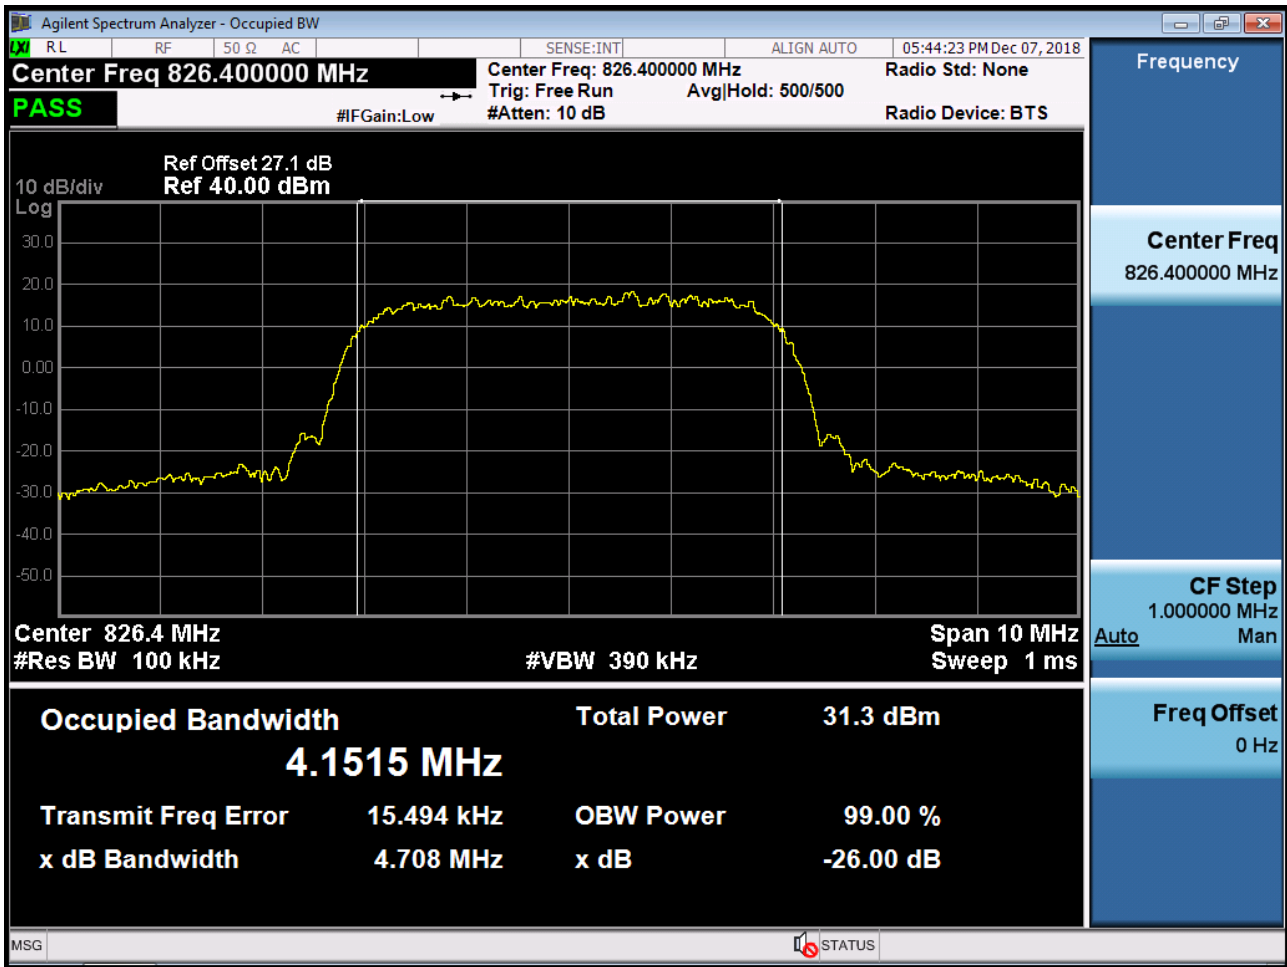


■ WCDMA850 MODE (4183 CH.) Occupied Bandwidth

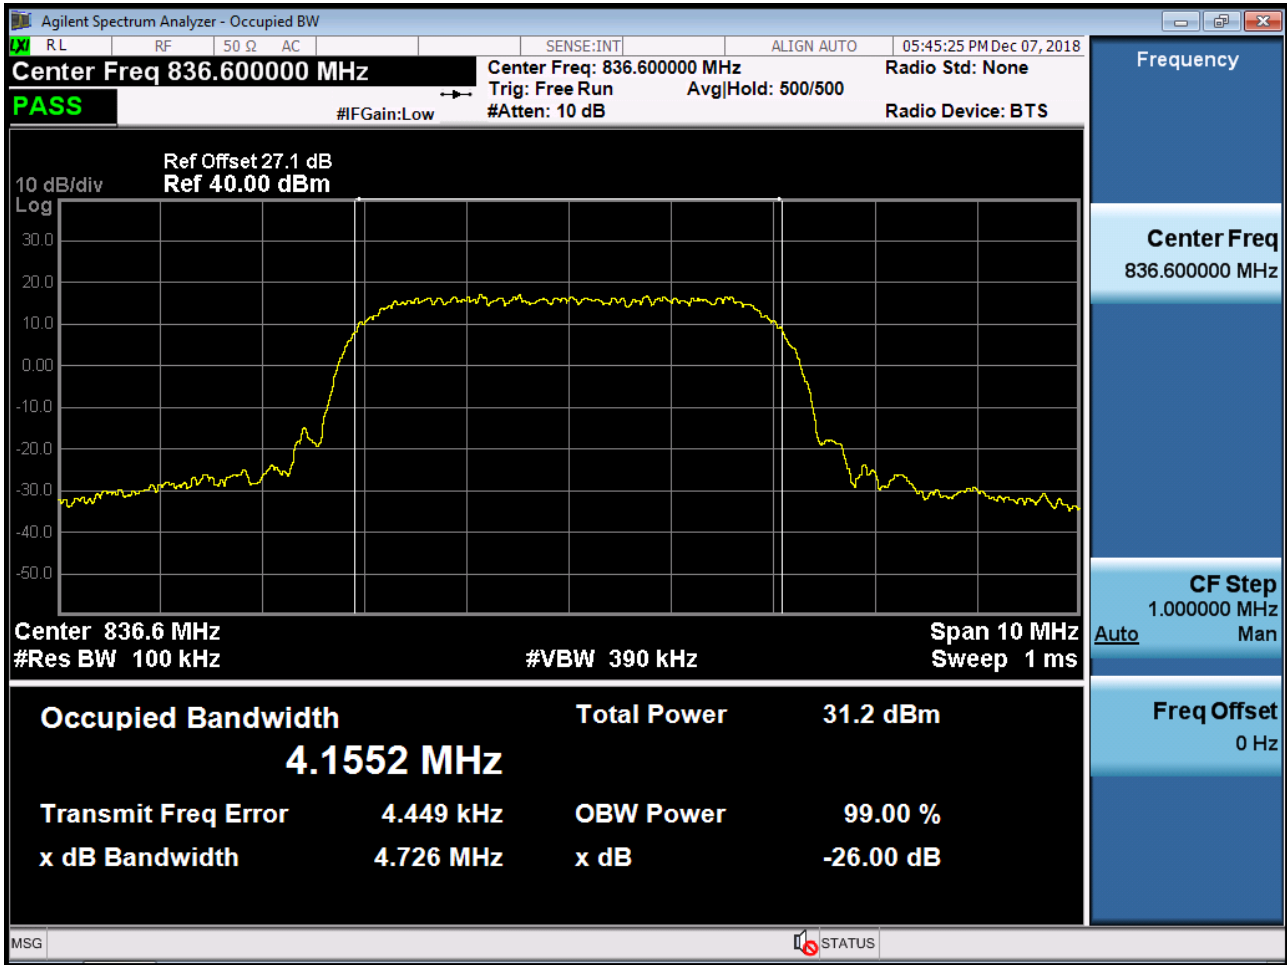

■ WCDMA850MODE (4233 CH.) Occupied Bandwidth

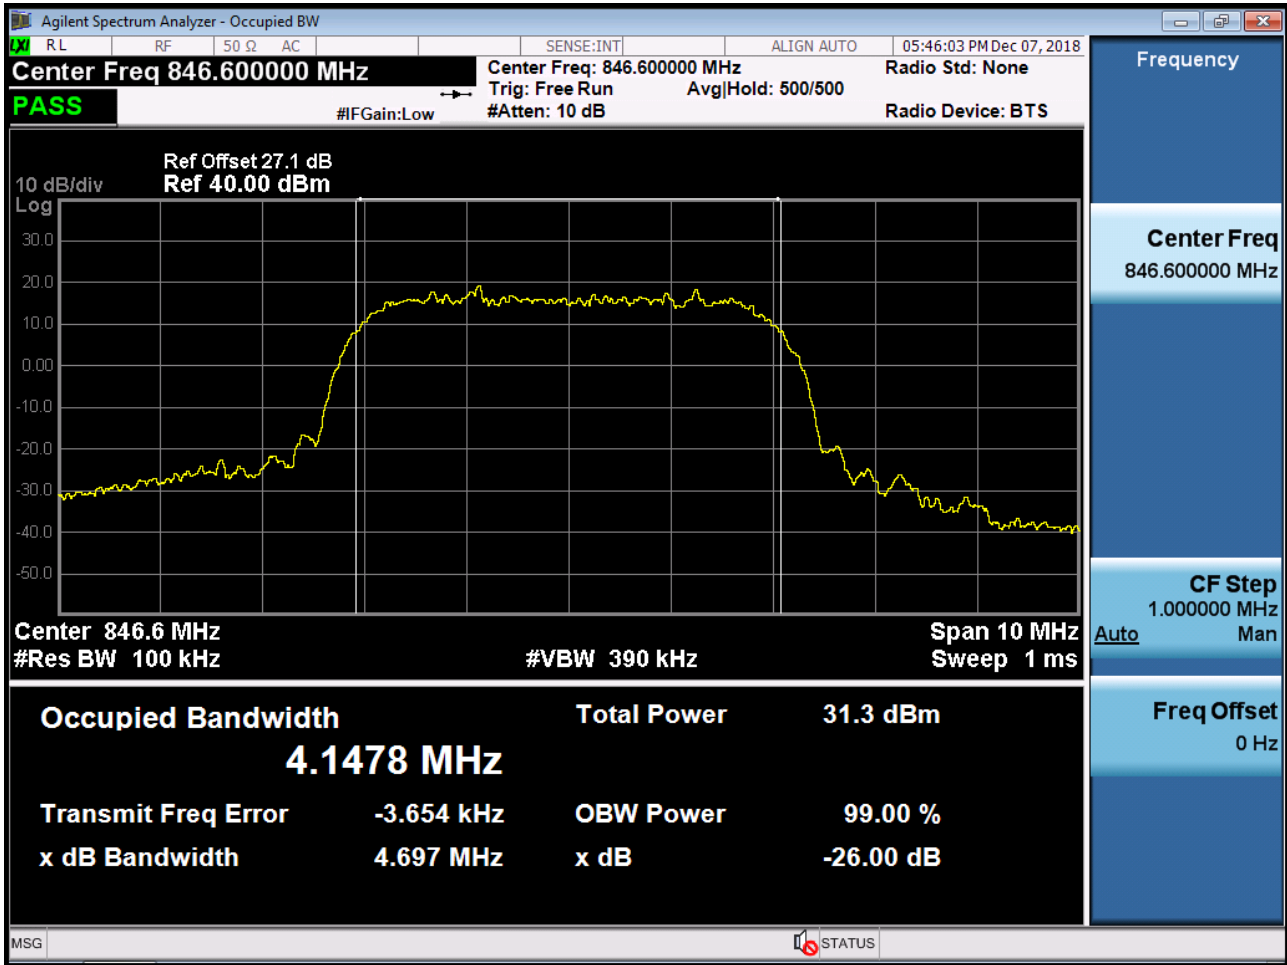


■ WCDMA1900 MODE (9262 CH.) Occupied Bandwidth

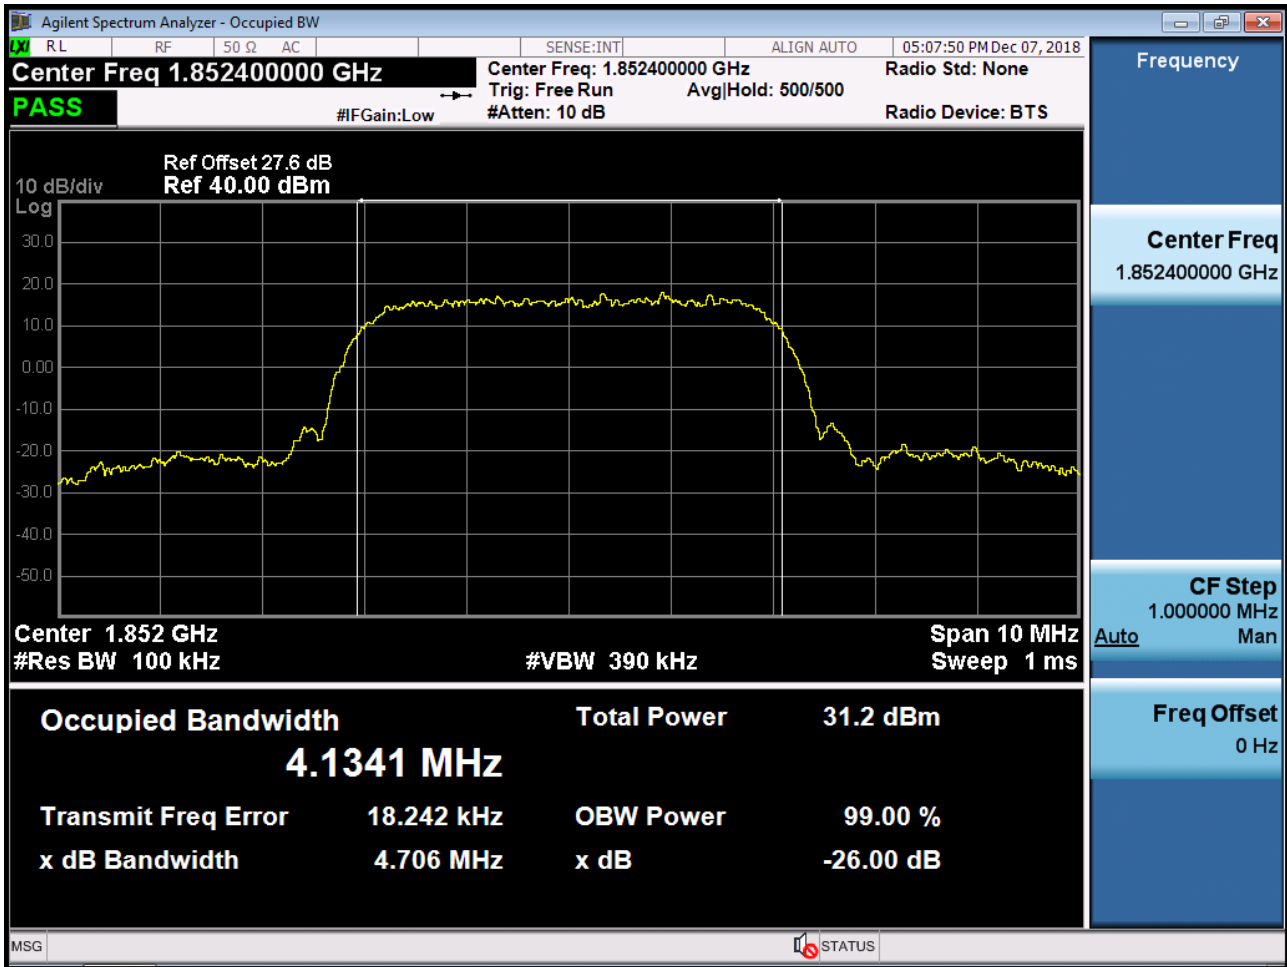





■ WCDMA1900 MODE (9400 CH.) Occupied Bandwidth

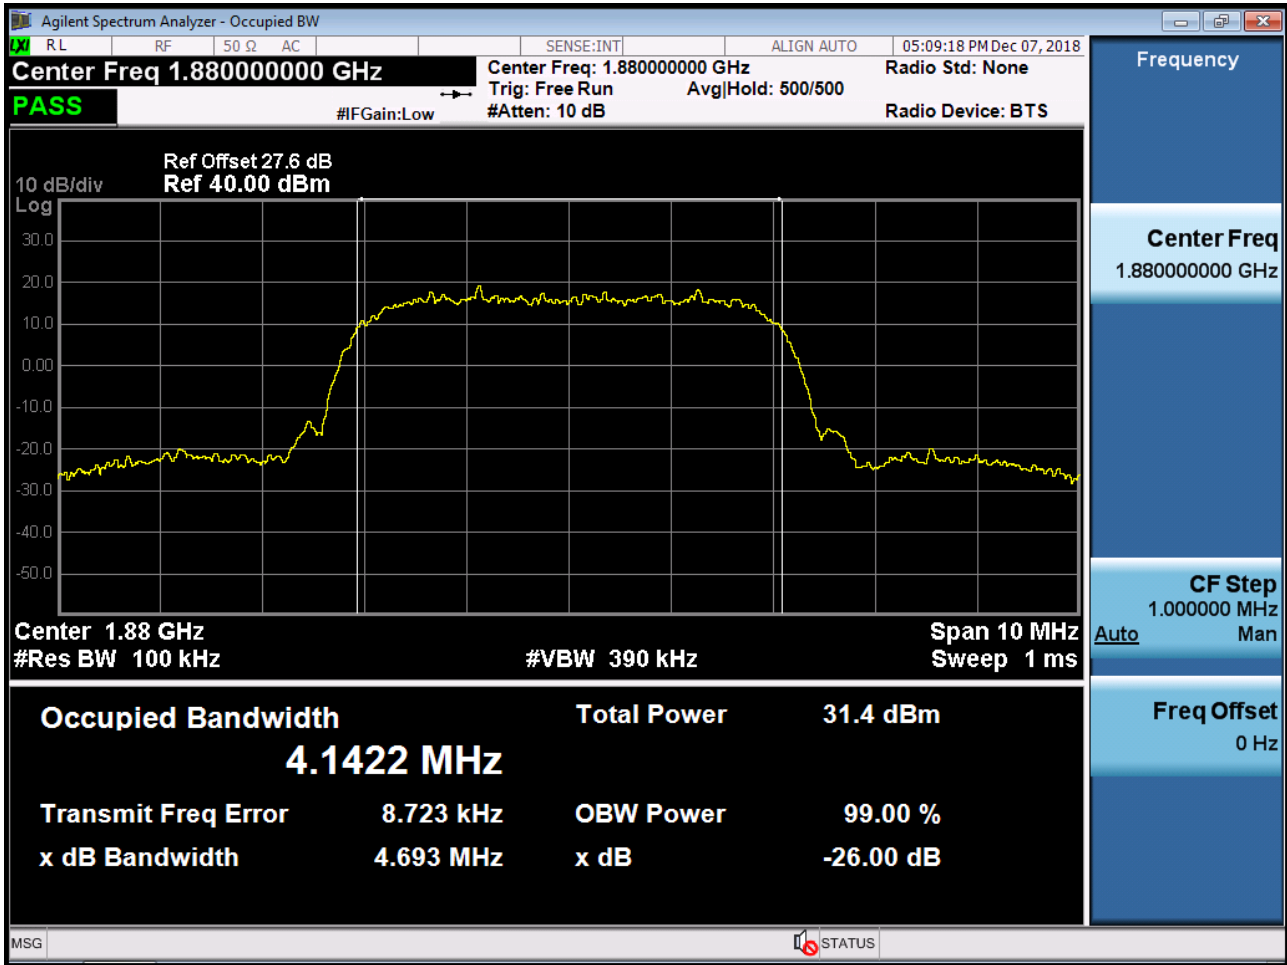


■ WCDMA1900 MODE (9538 CH.) Occupied Bandwidth

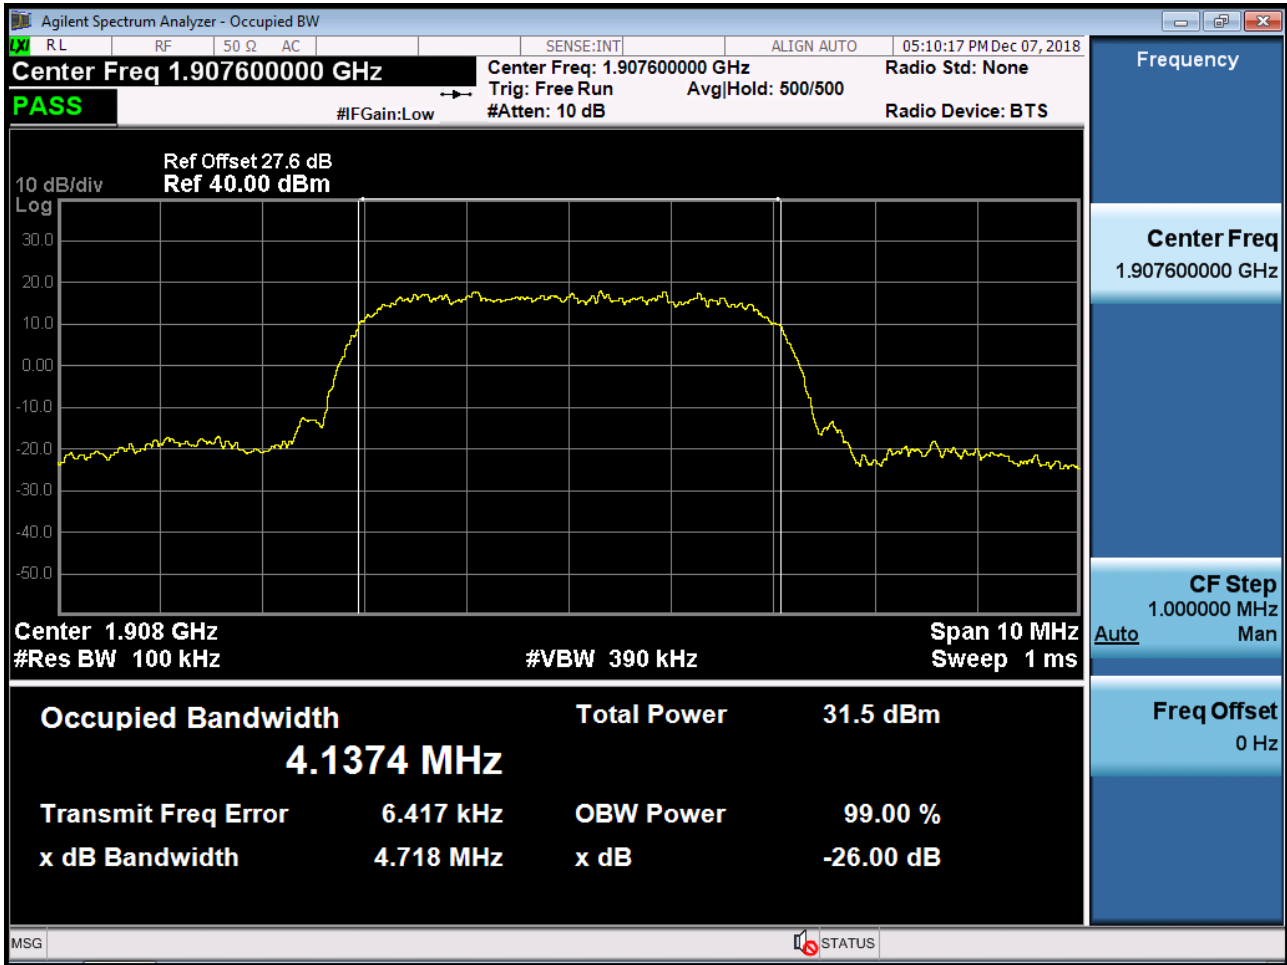


■ WCDMA1700 MODE (1312 CH.) Occupied Bandwidth

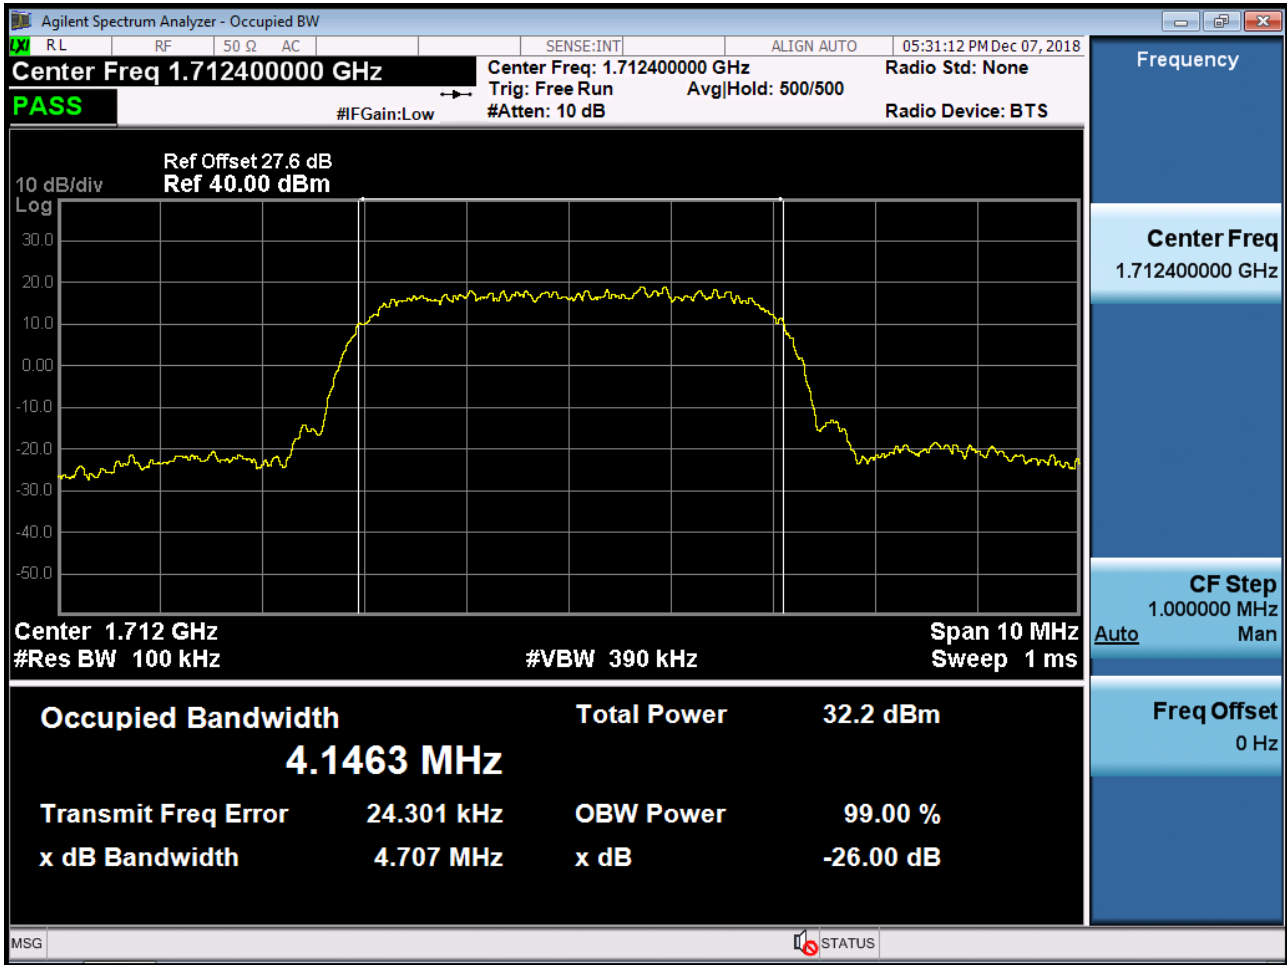

■ WCDMA1700 MODE (1412 CH.) Occupied Bandwidth

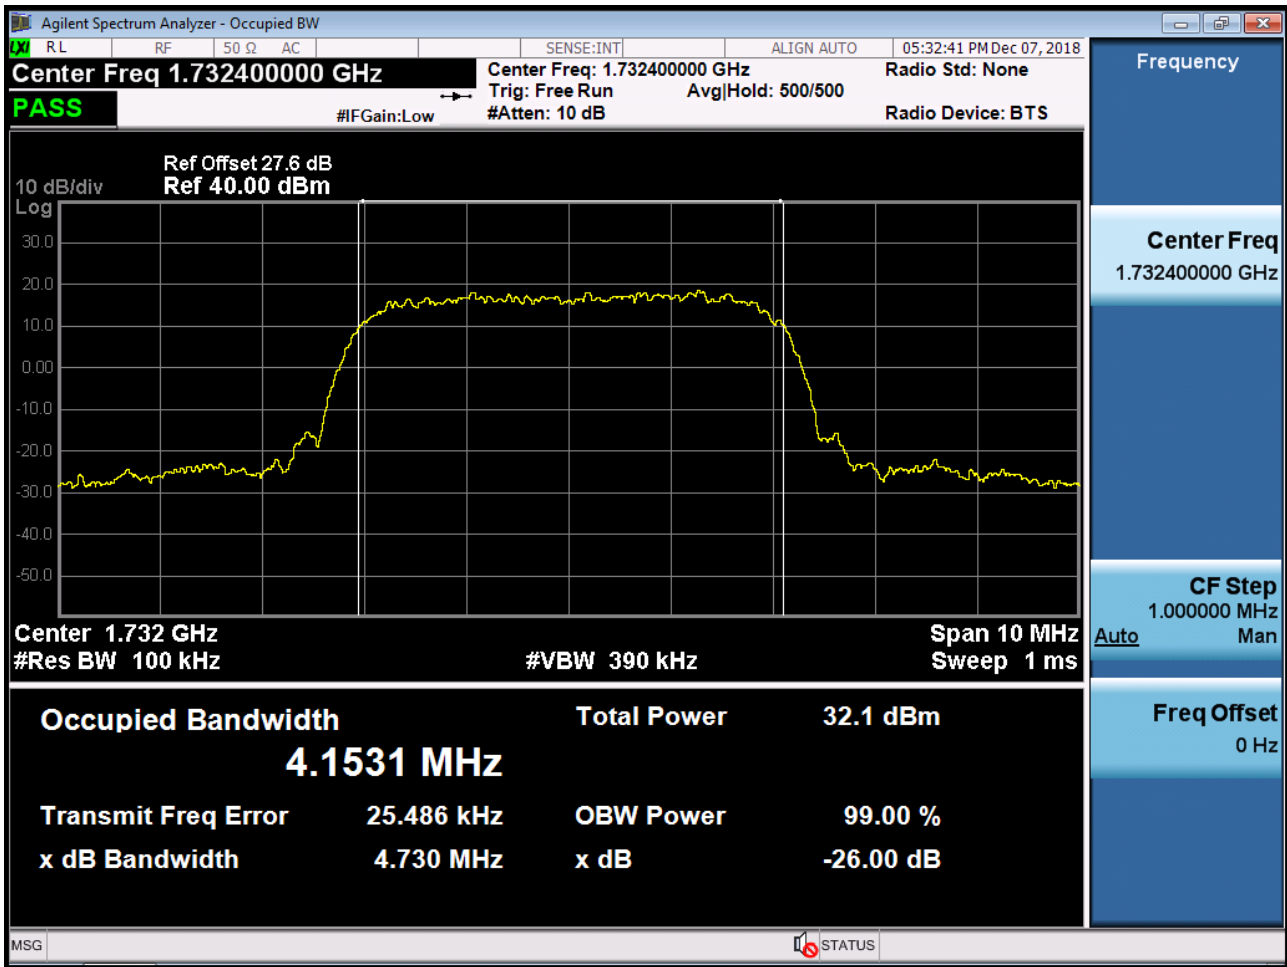


■ WCDMA1700 MODE (1513 CH.) Occupied Bandwidth

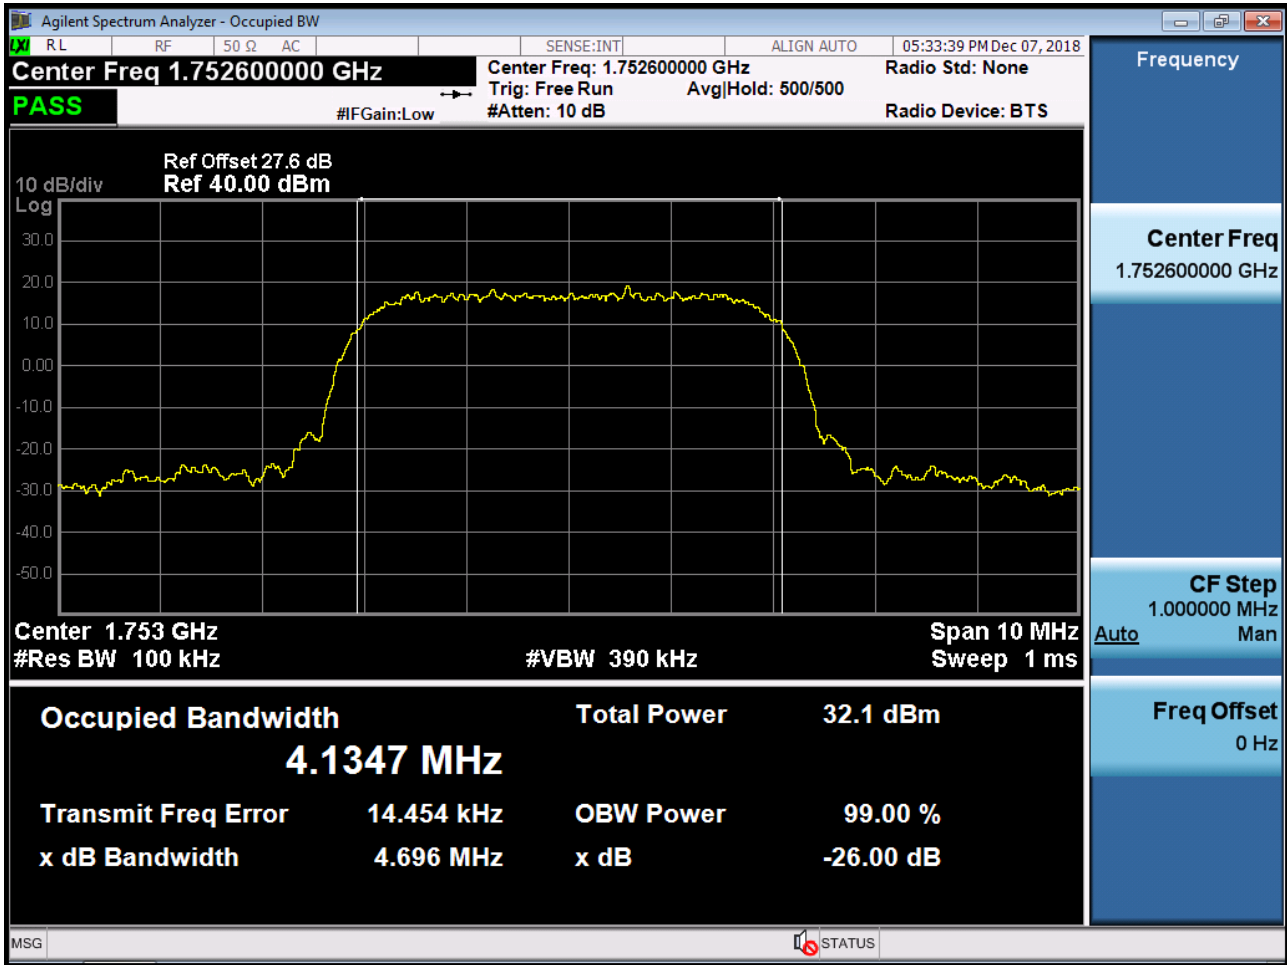


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>PK</sub>



■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio P<sub>Avg</sub>

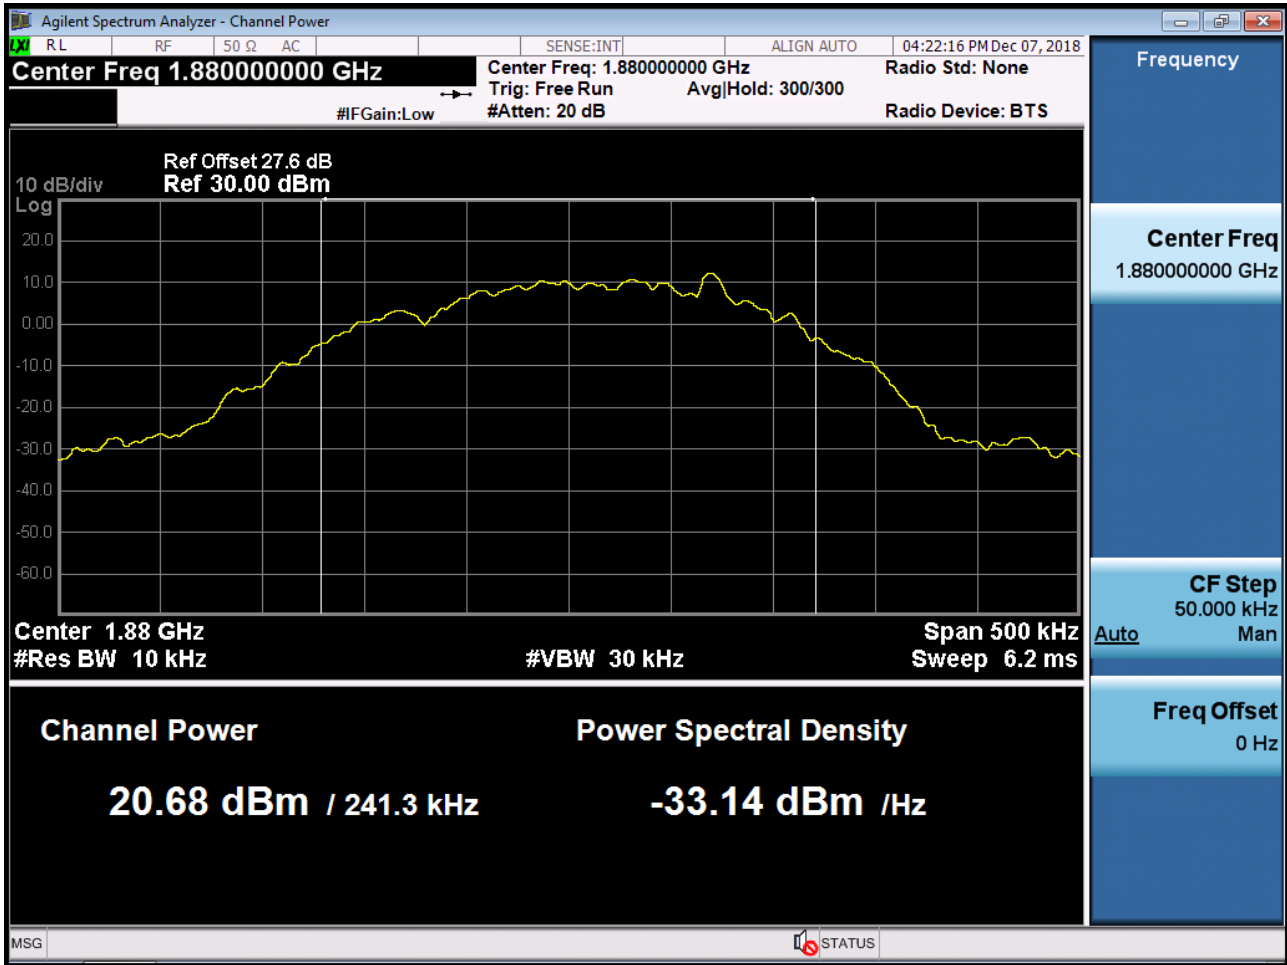


■ GSM1900 MODE (661 CH.) Peak-to-Average Ratio Duty

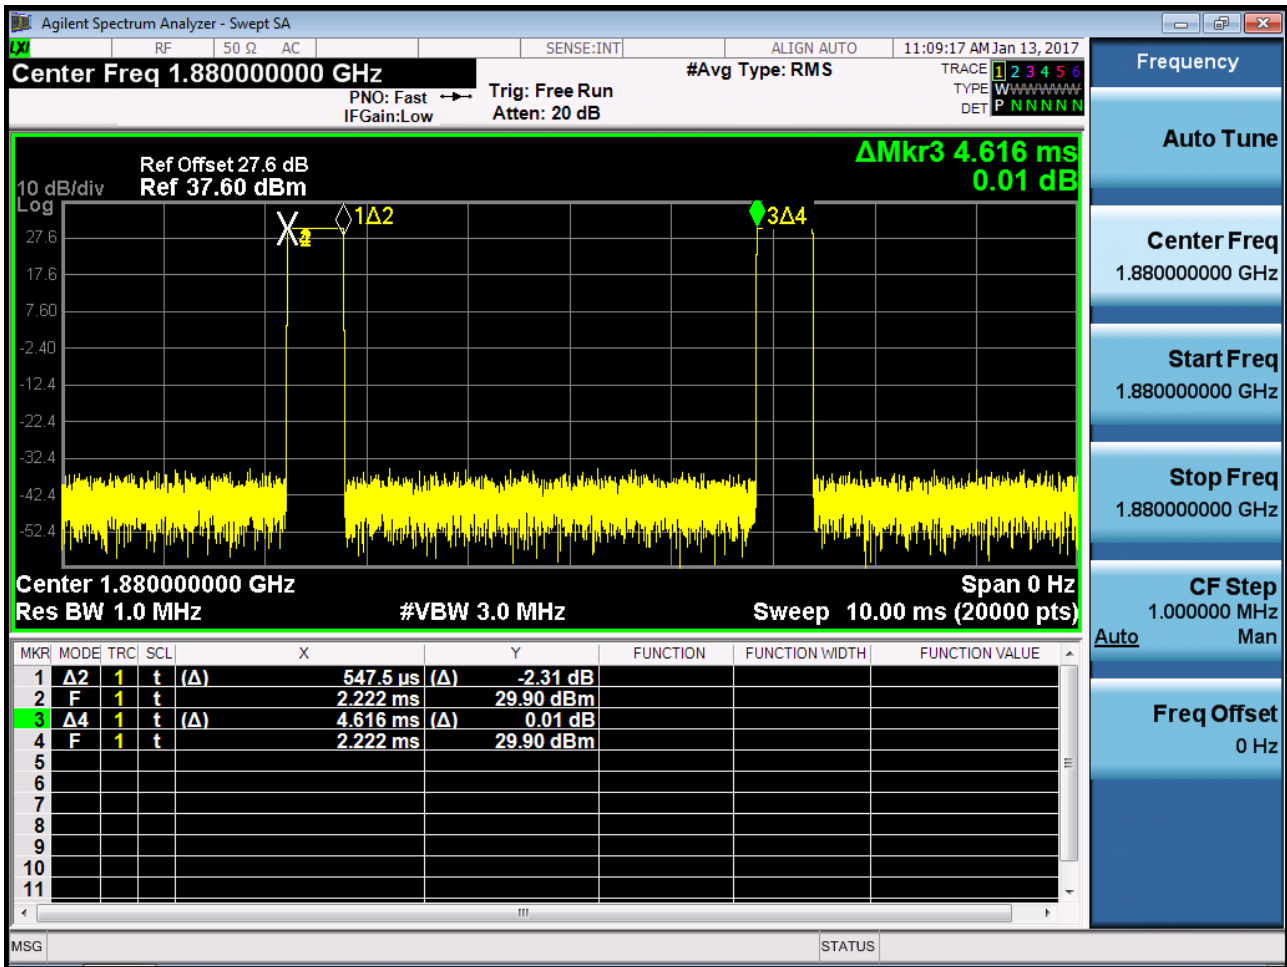




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio Duty

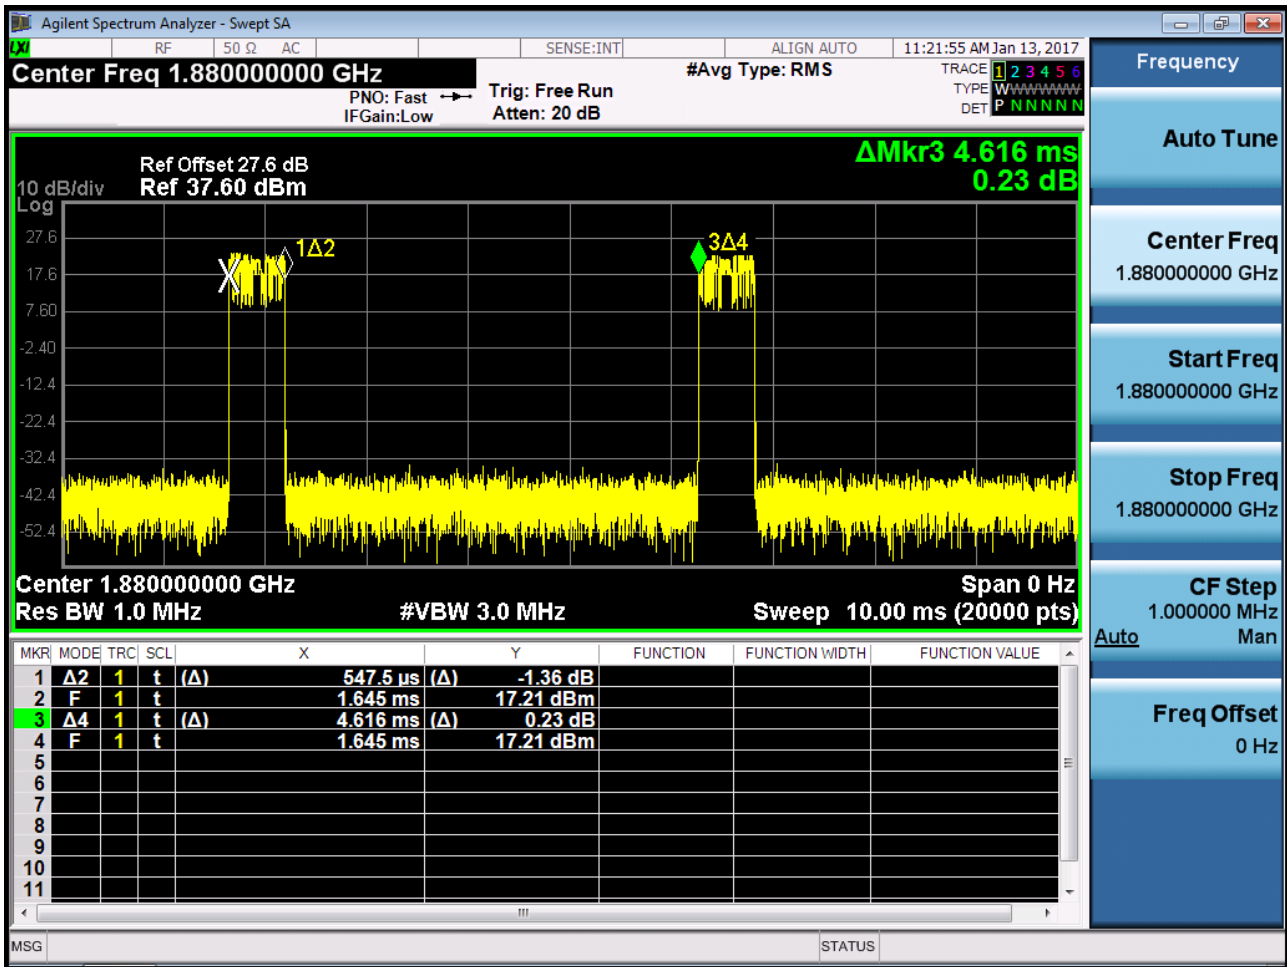


■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P<sub>pk</sub>




■ GSM1900 EDGE (661 CH.) Peak-to-Average Ratio P<sub>Avg</sub>

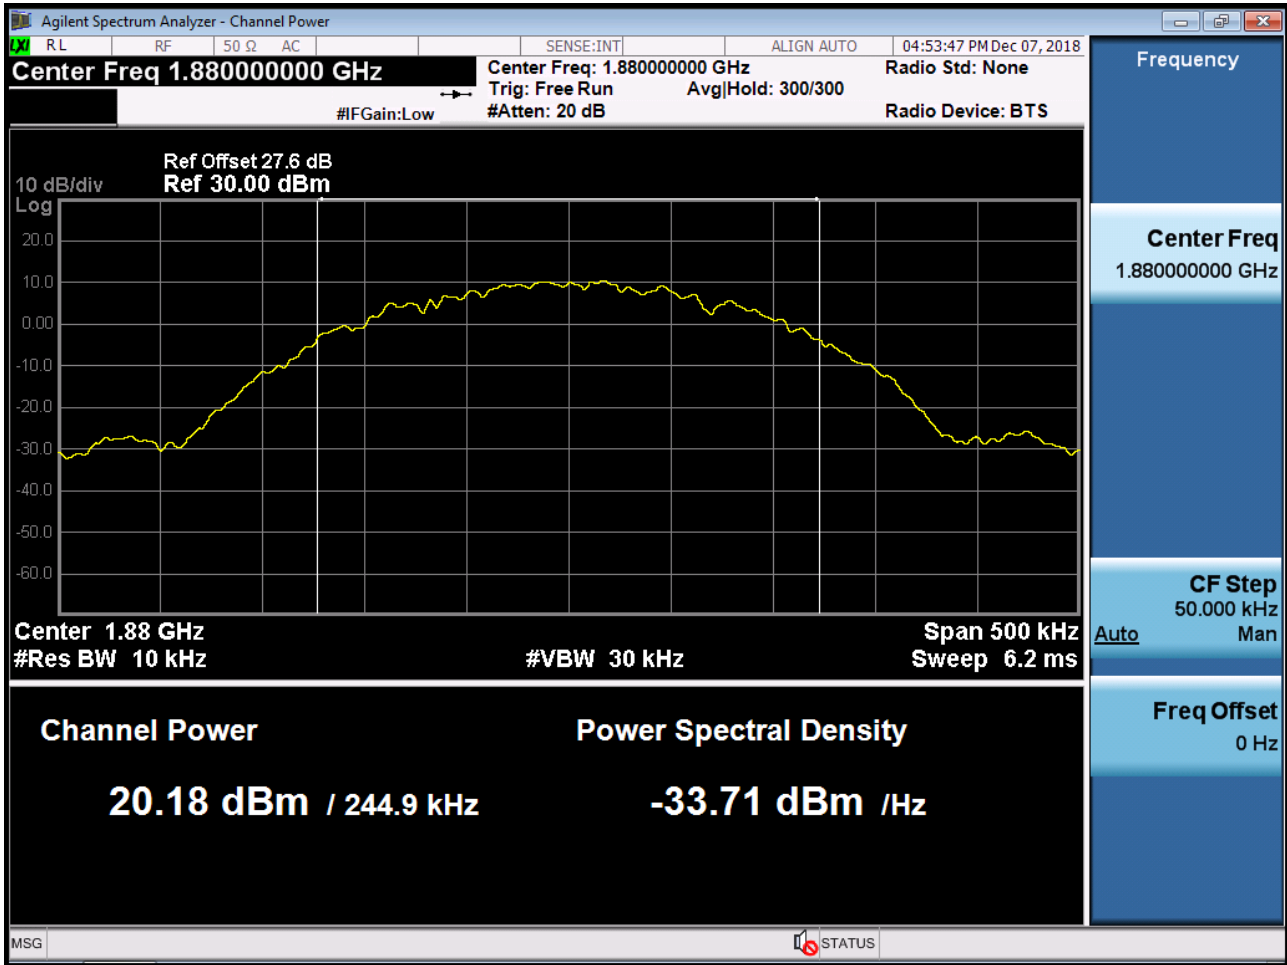


■ WCDMA1900 MODE (9400 CH.) Peak-to-Average Ratio

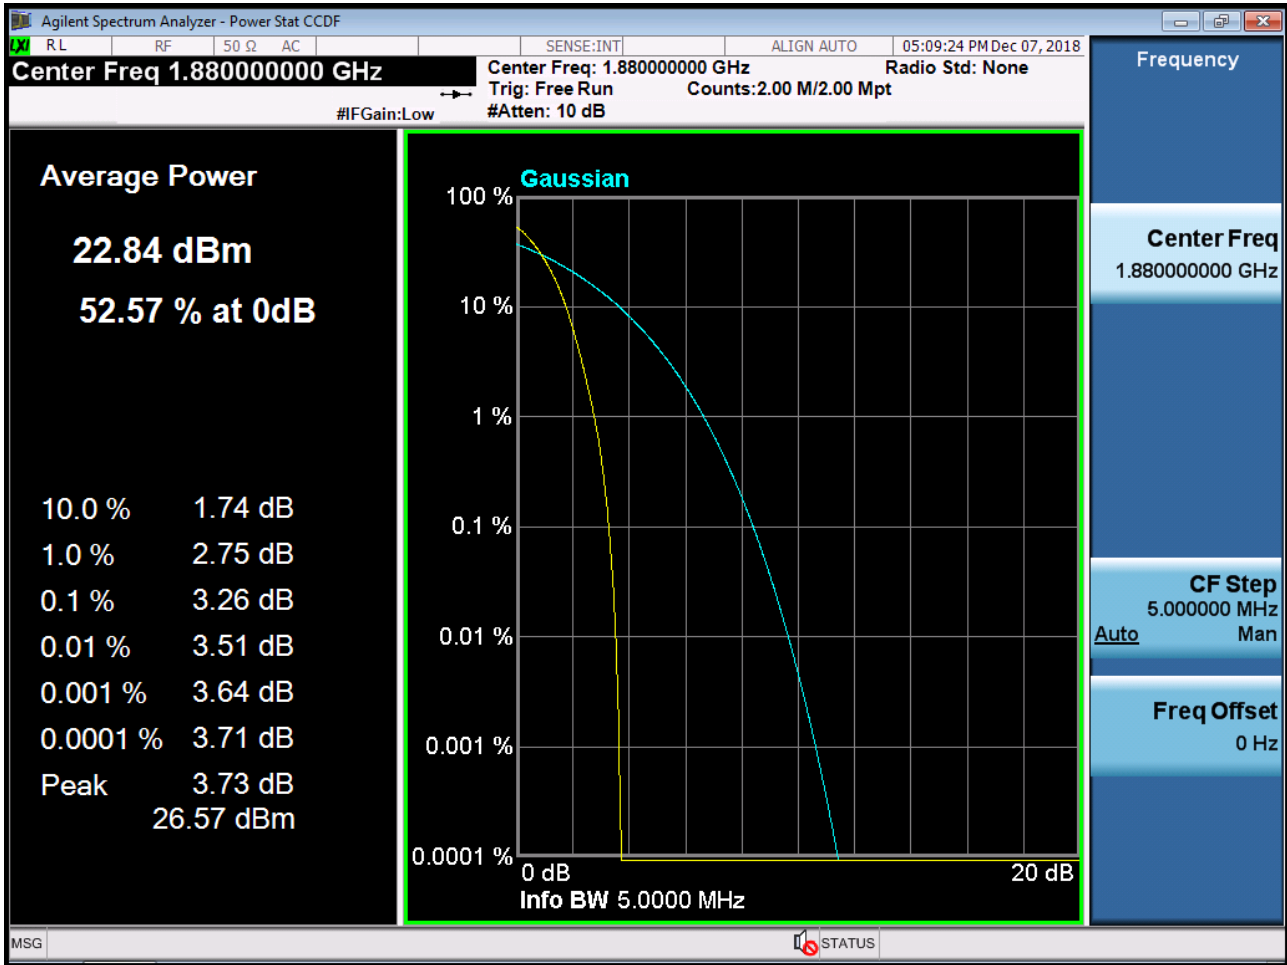


■ WCDMA1700 MODE (1412 CH.) Peak-to-Average Ratio

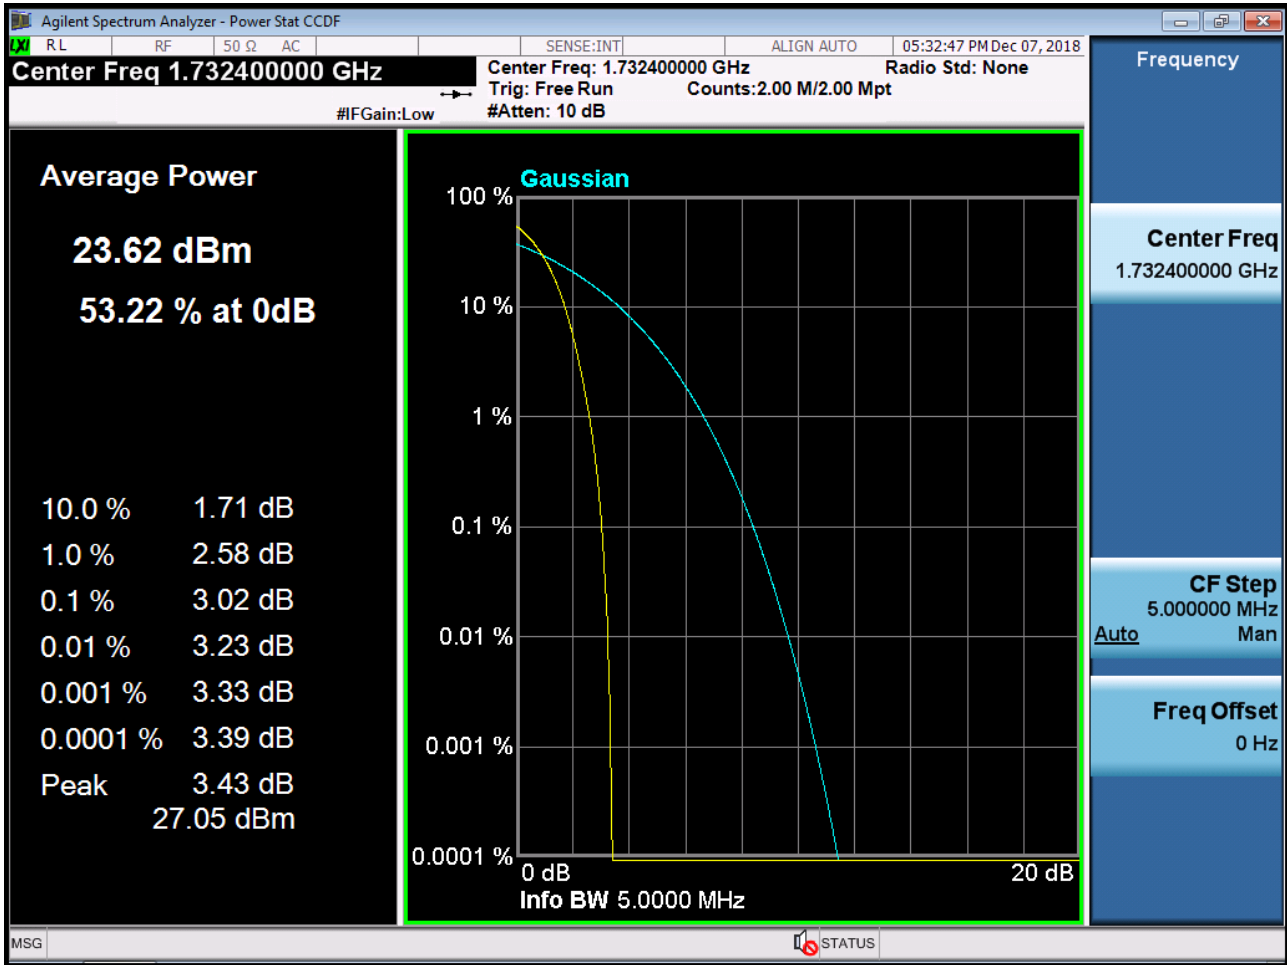


■ GSM1900 MODE (512 CH.) Block Edge 1

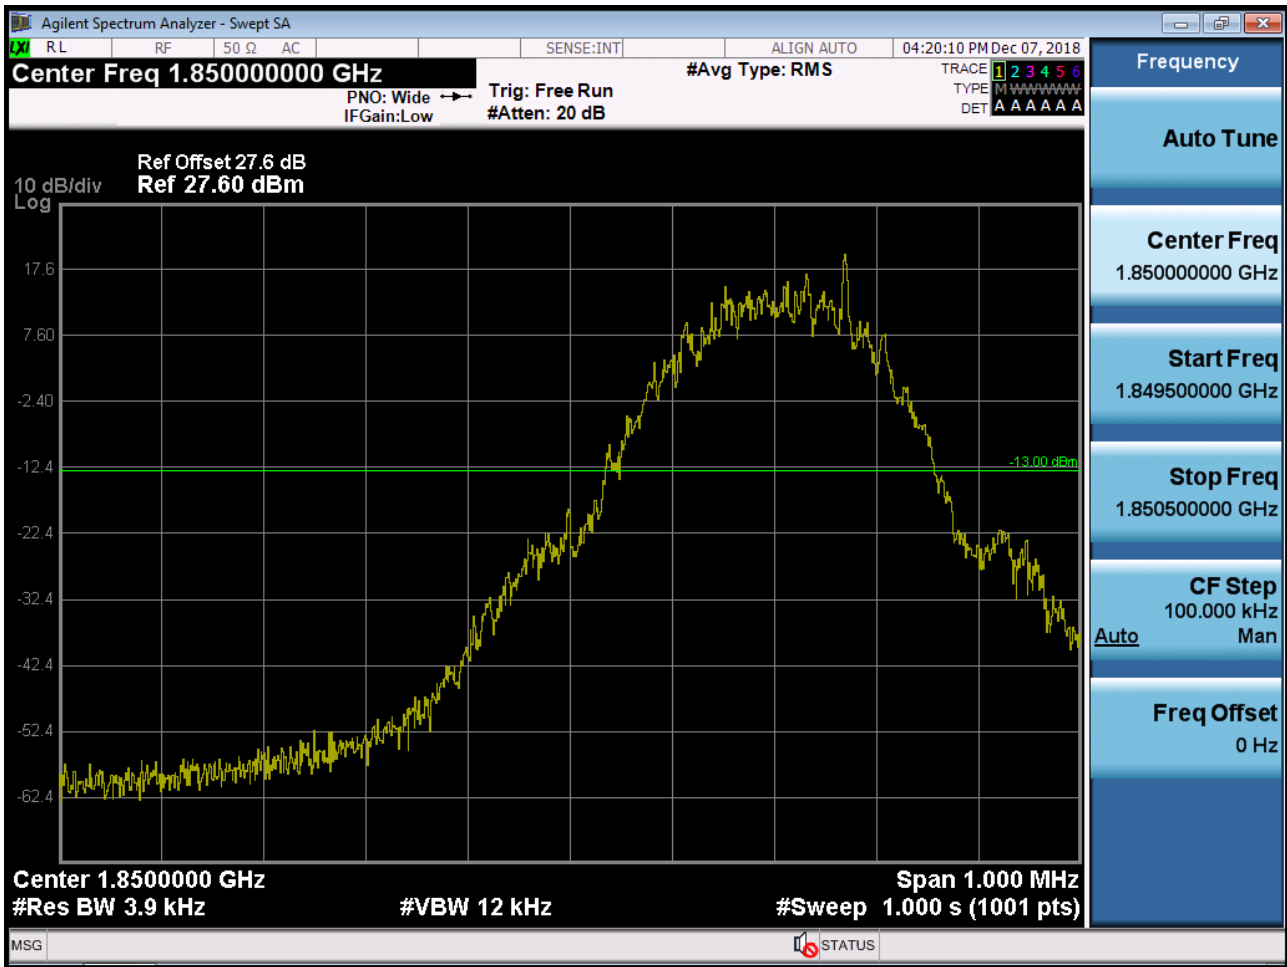

■ GSM1900 MODE (512 CH.) Block Edge 2

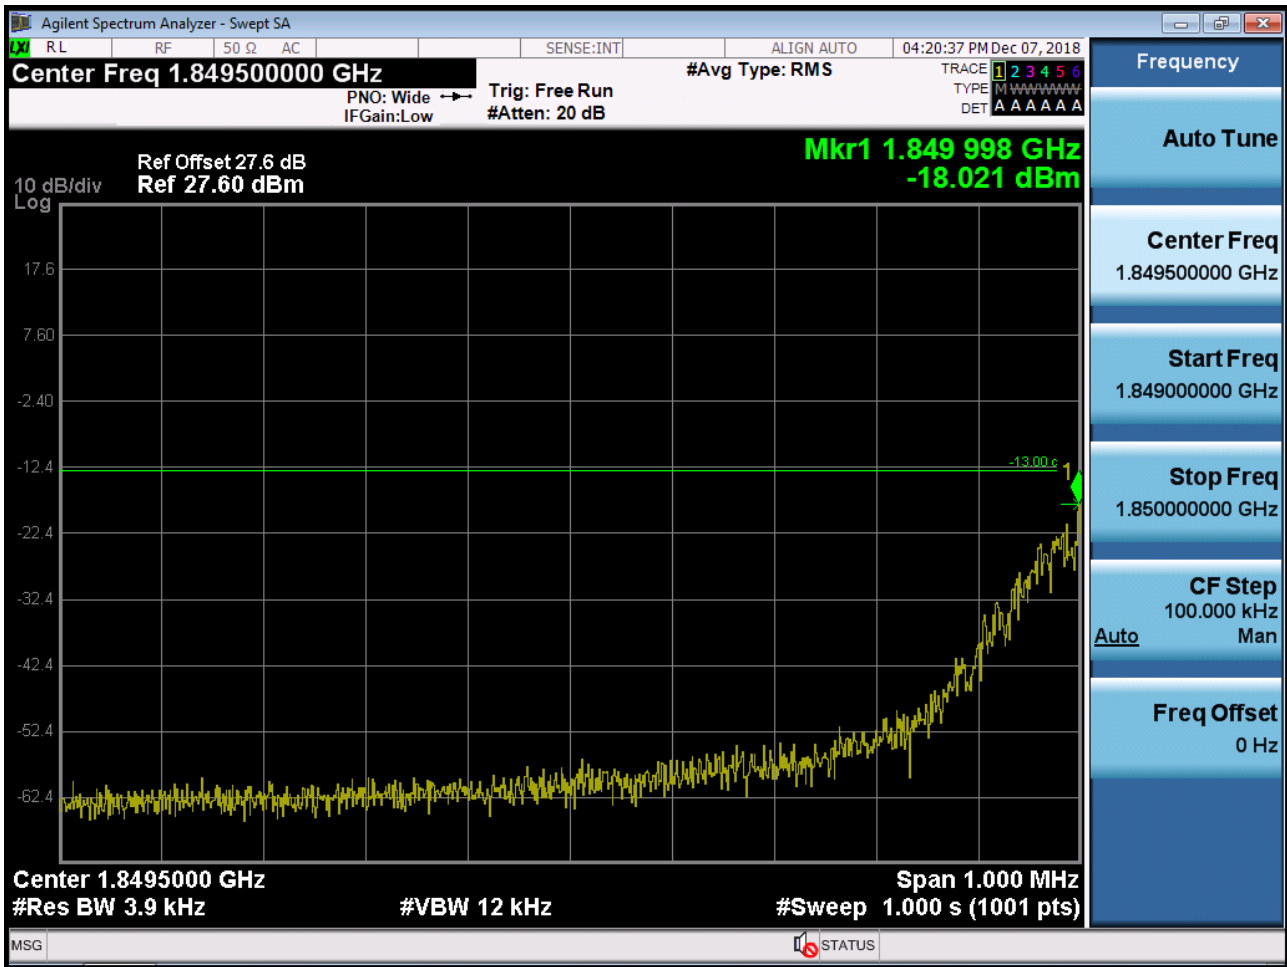

■ GSM1900 MODE (512 CH.) Block Edge 3

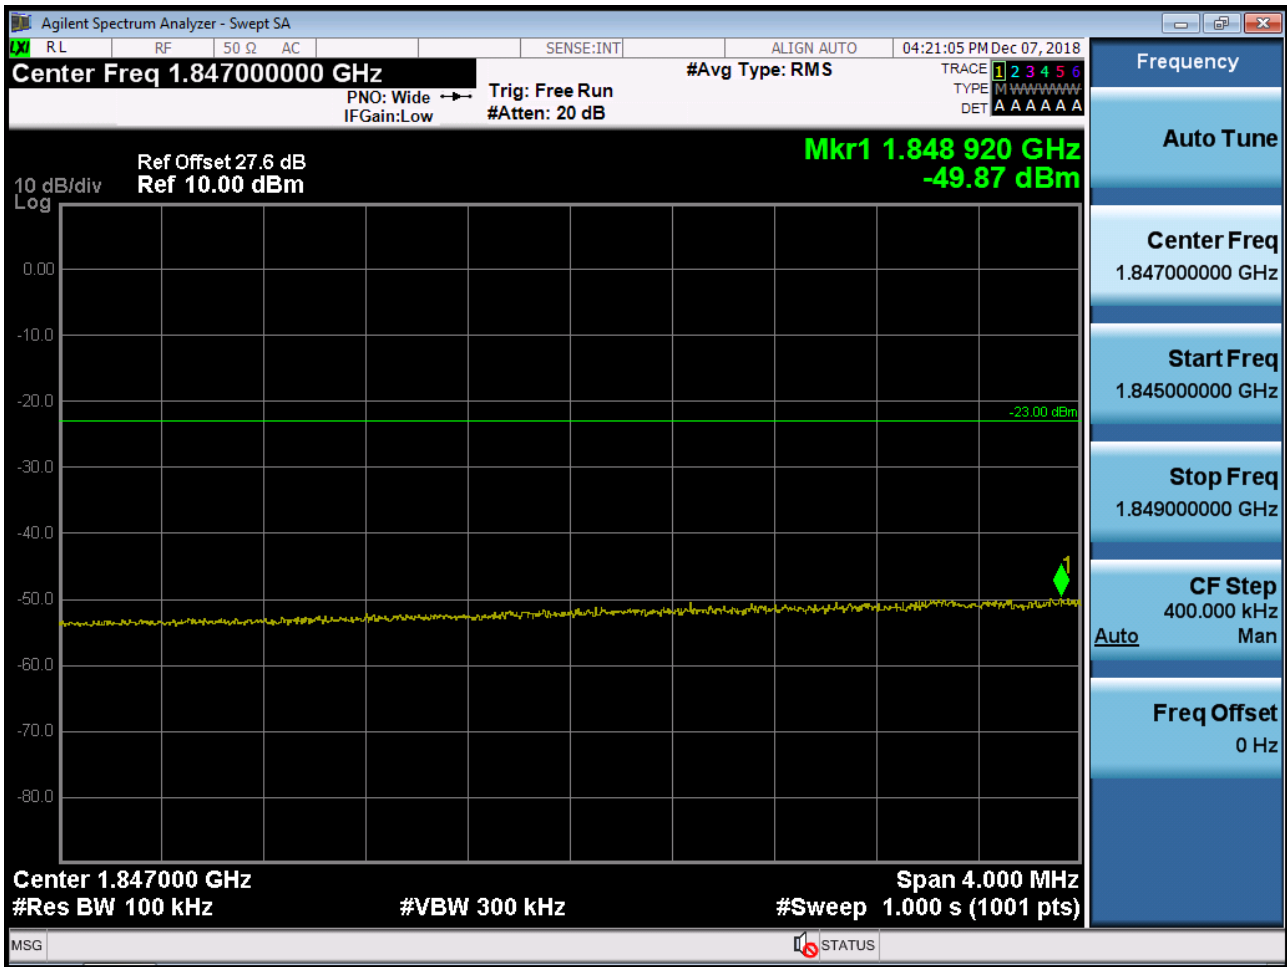


Note : We used a narrower RBW in order to increase accuracy.


Calculation = Reading Value +  $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -49.87 \text{ dBm} + 10 \text{ dB} = -39.87 \text{ dBm}$




■ GSM1900 MODE (810 CH.) Block Edge 1

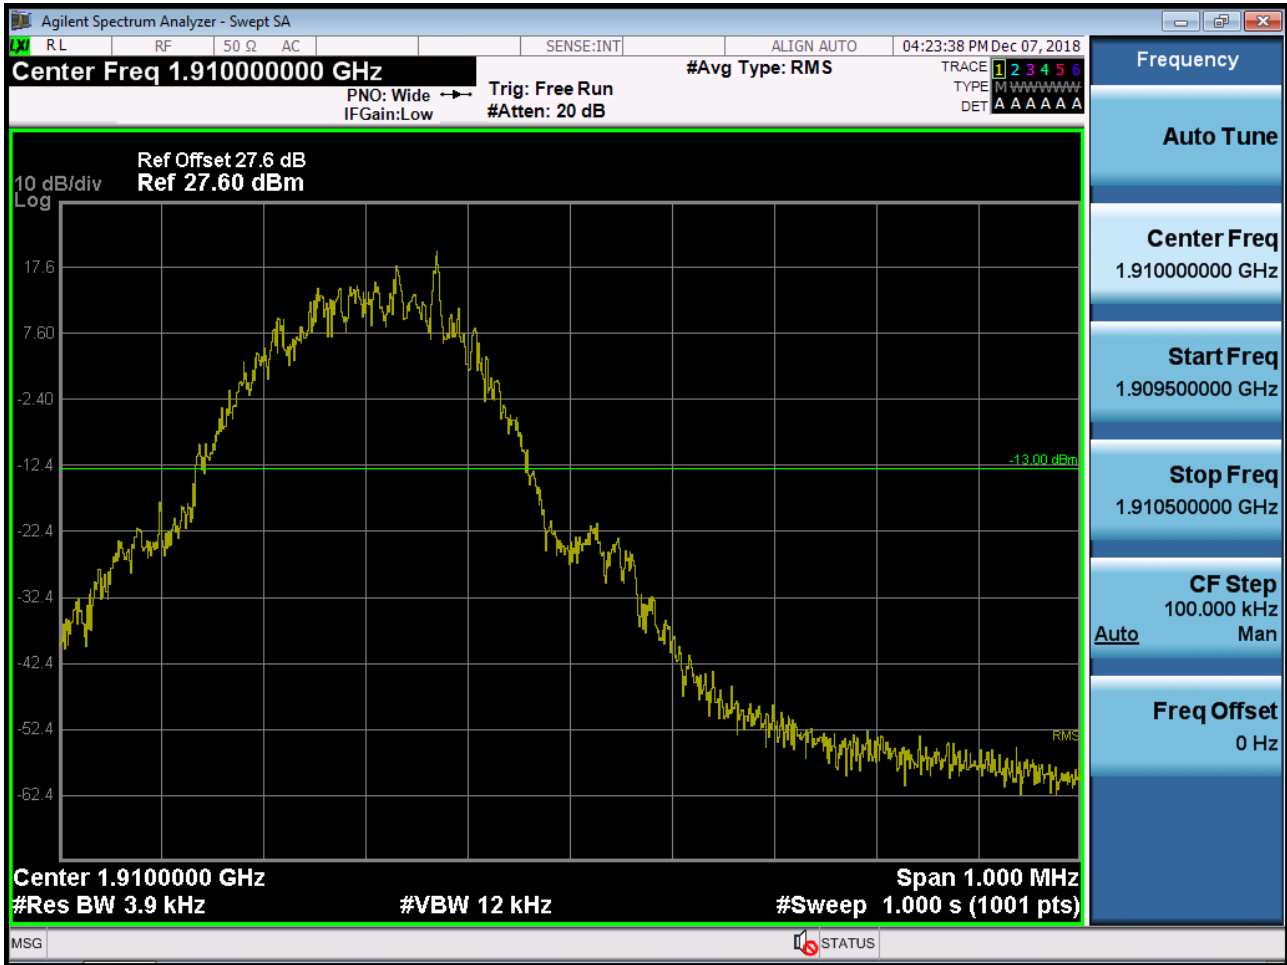

■ GSM1900 MODE (810 CH.) Block Edge 2

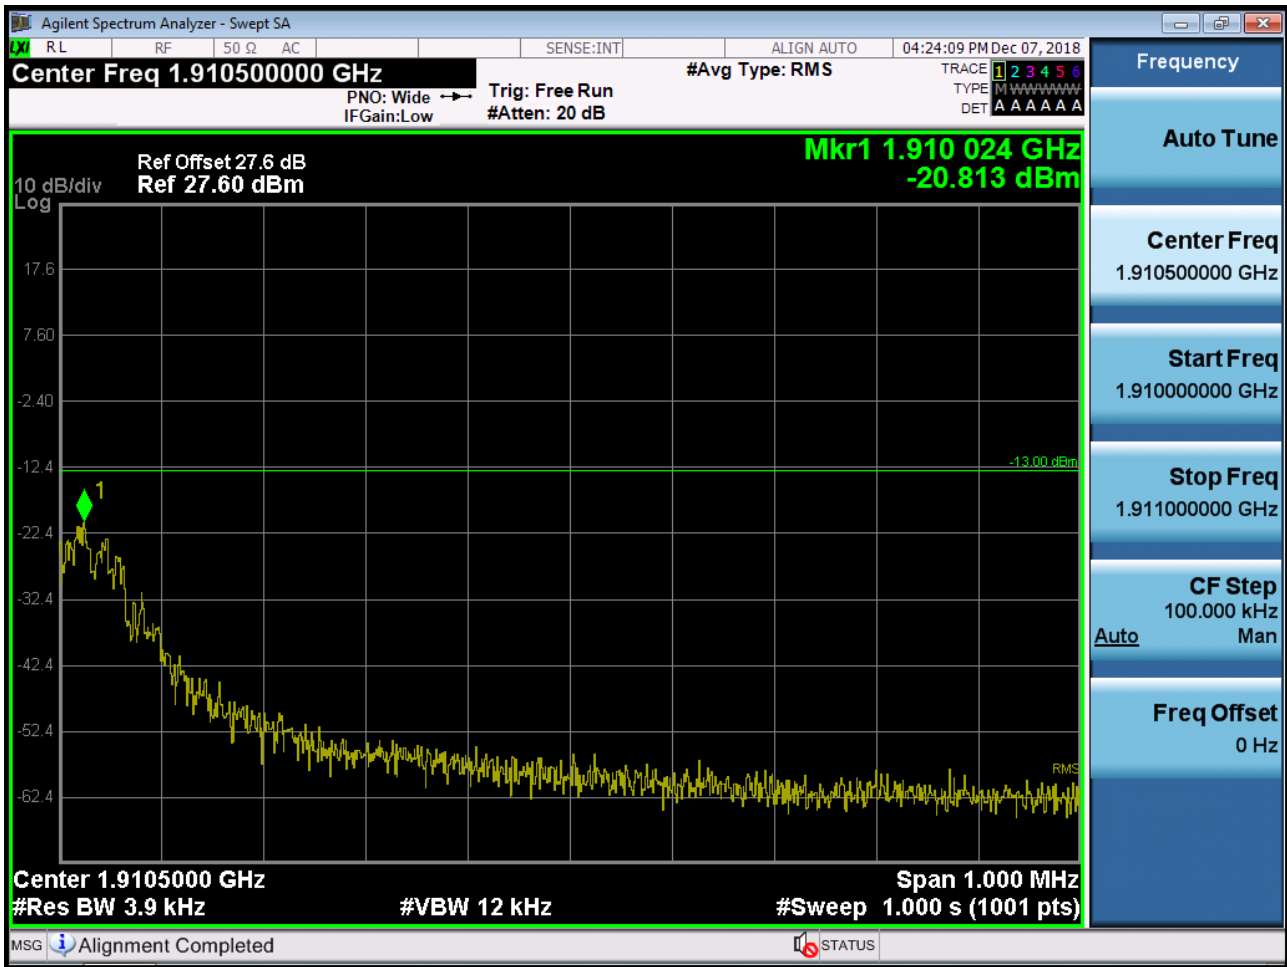


■ GSM1900 MODE (810 CH.) Block Edge 3

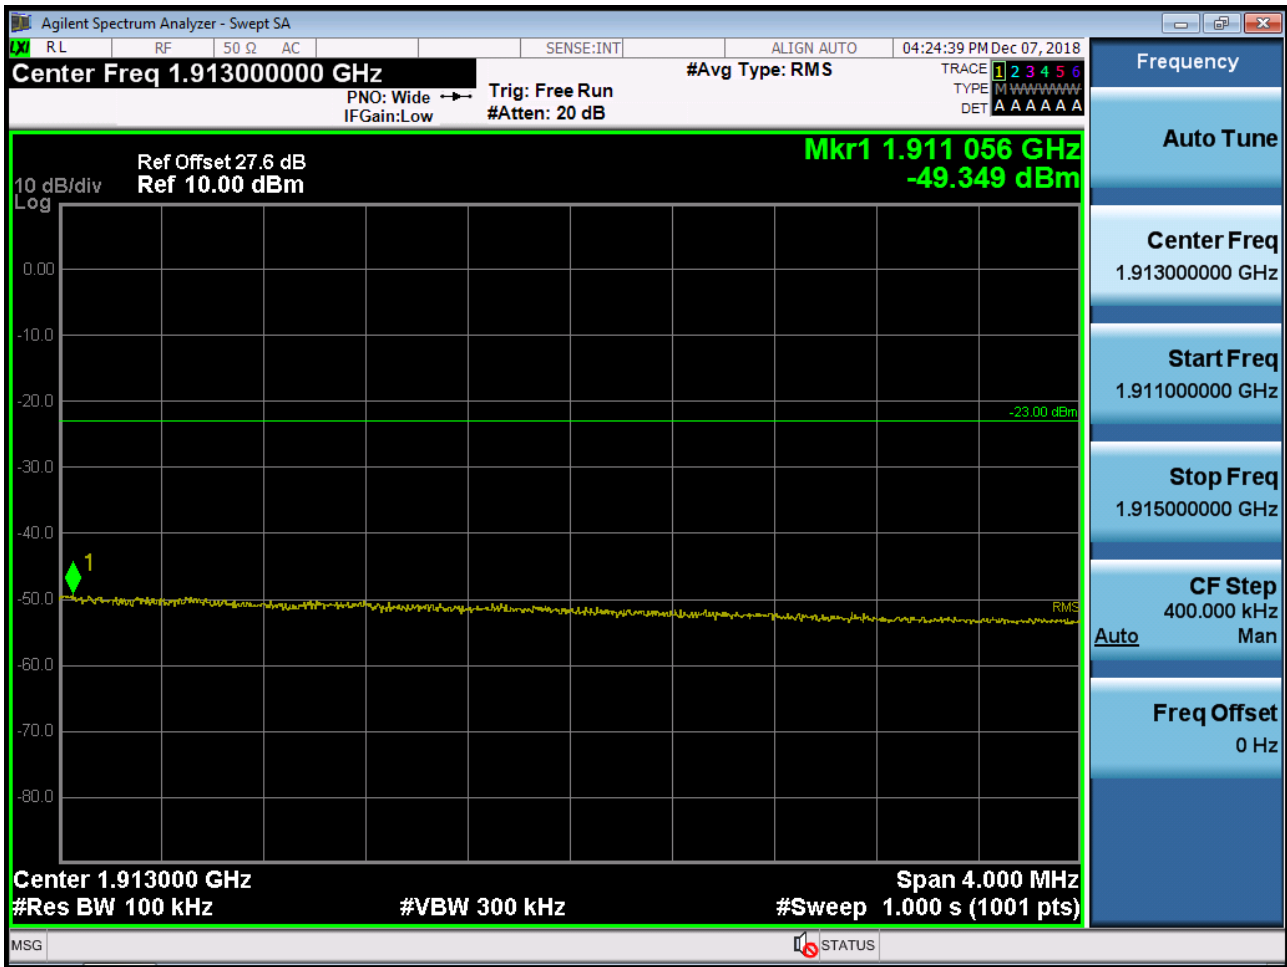


Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10\*log(1 MHz/100 kHz) dB = -49.349 dBm + 10 dB = **-39.349 dBm**

■ EDGE MODE (512 CH.) Block Edge 1

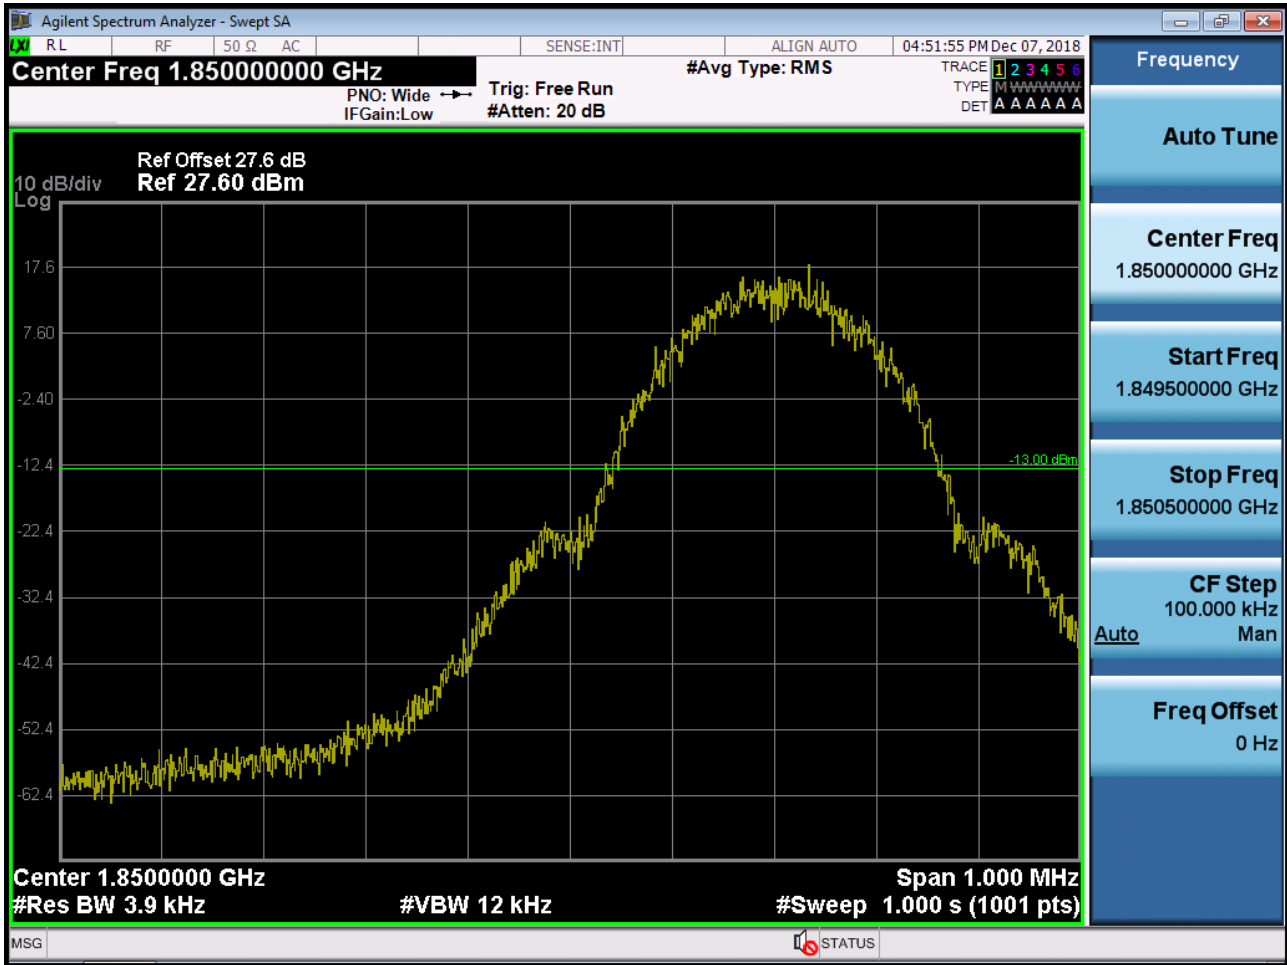

■ EDGE MODE (512 CH.) Block Edge 2

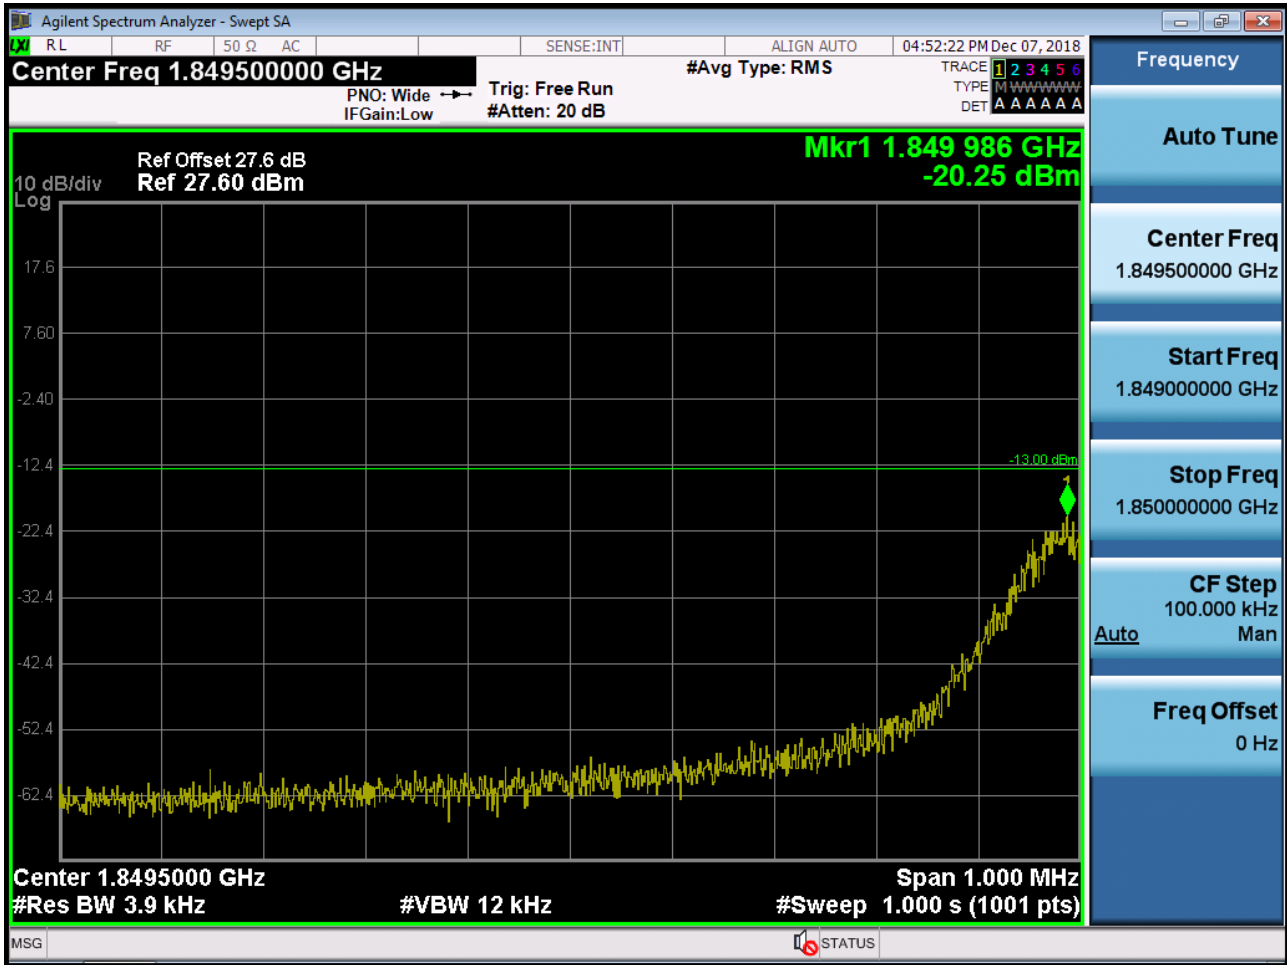


■ EDGE MODE (512 CH.) Block Edge 3




Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value +  $10 \cdot \log(1 \text{ MHz}/100 \text{ kHz}) \text{ dB} = -49.69 \text{ dBm} + 10 \text{ dB} = -39.69 \text{ dBm}$

■ EDGE MODE (810 CH.) Block Edge 1

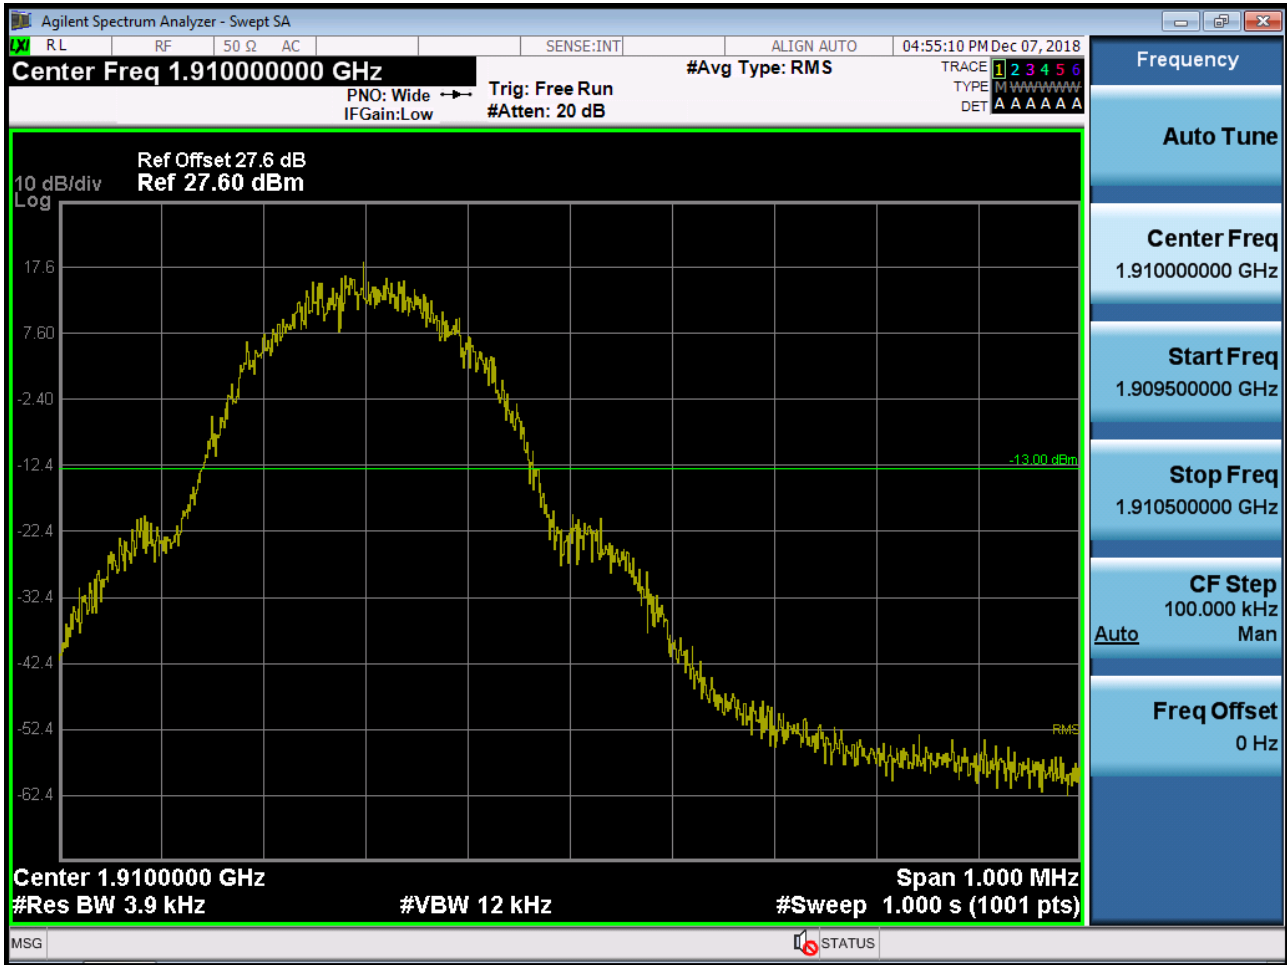

■ EDGE MODE (810 CH.) Block Edge 2

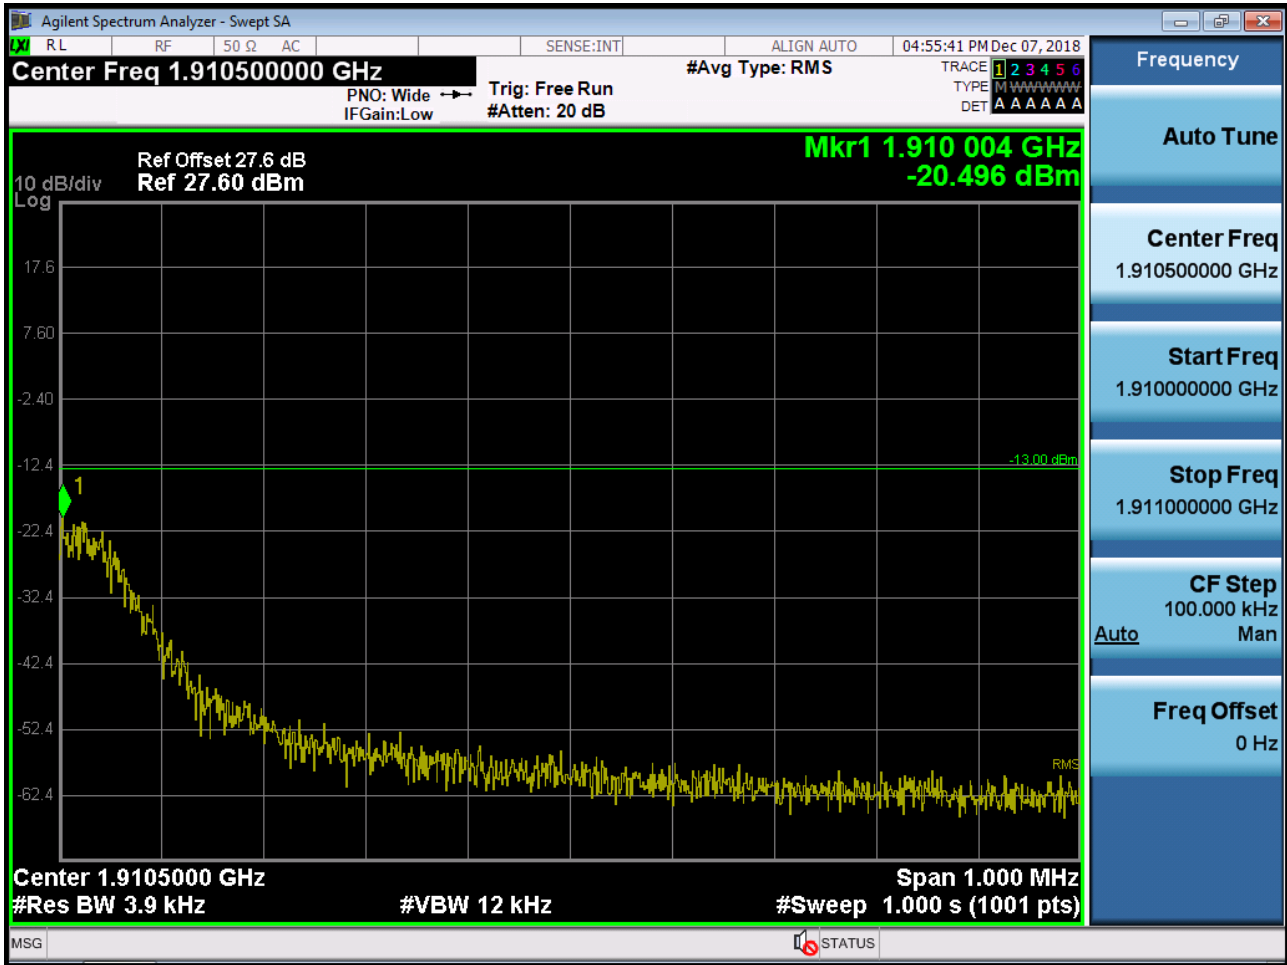



■ EDGE MODE (810 CH.) Block Edge 3



Note : We used a narrower RBW in order to increase accuracy.

Calculation = Reading Value + 10\*log(1 MHz/100 kHz) dB = -49.179 dBm + 10 dB = **-39.179 dBm**

■ WCDMA850 MODE (4132 CH.) Block Edge



■ WCDMA850 MODE (4132 CH.) – 4 MHz Span



■ WCDMA850MODE (4233 CH.) Block Edge



■ WCDMA850 MODE (4233 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9262 CH.) Block Edge



■ WCDMA1900 MODE (9262 CH.) – 4 MHz Span



■ WCDMA1900 MODE (9538 CH.) Block Edge





■ WCDMA1900 MODE (9538 CH.) – 4 MHz Span



■ WCDMA1700 MODE (1312 CH.) Block Edge



■ WCDMA1700 MODE (1312 CH.) – 4 MHz Span




■ WCDMA1700 MODE (1513 CH.) Block Edge




■ WCDMA1700 MODE (1513 CH.) – 4 MHz Span




■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions1

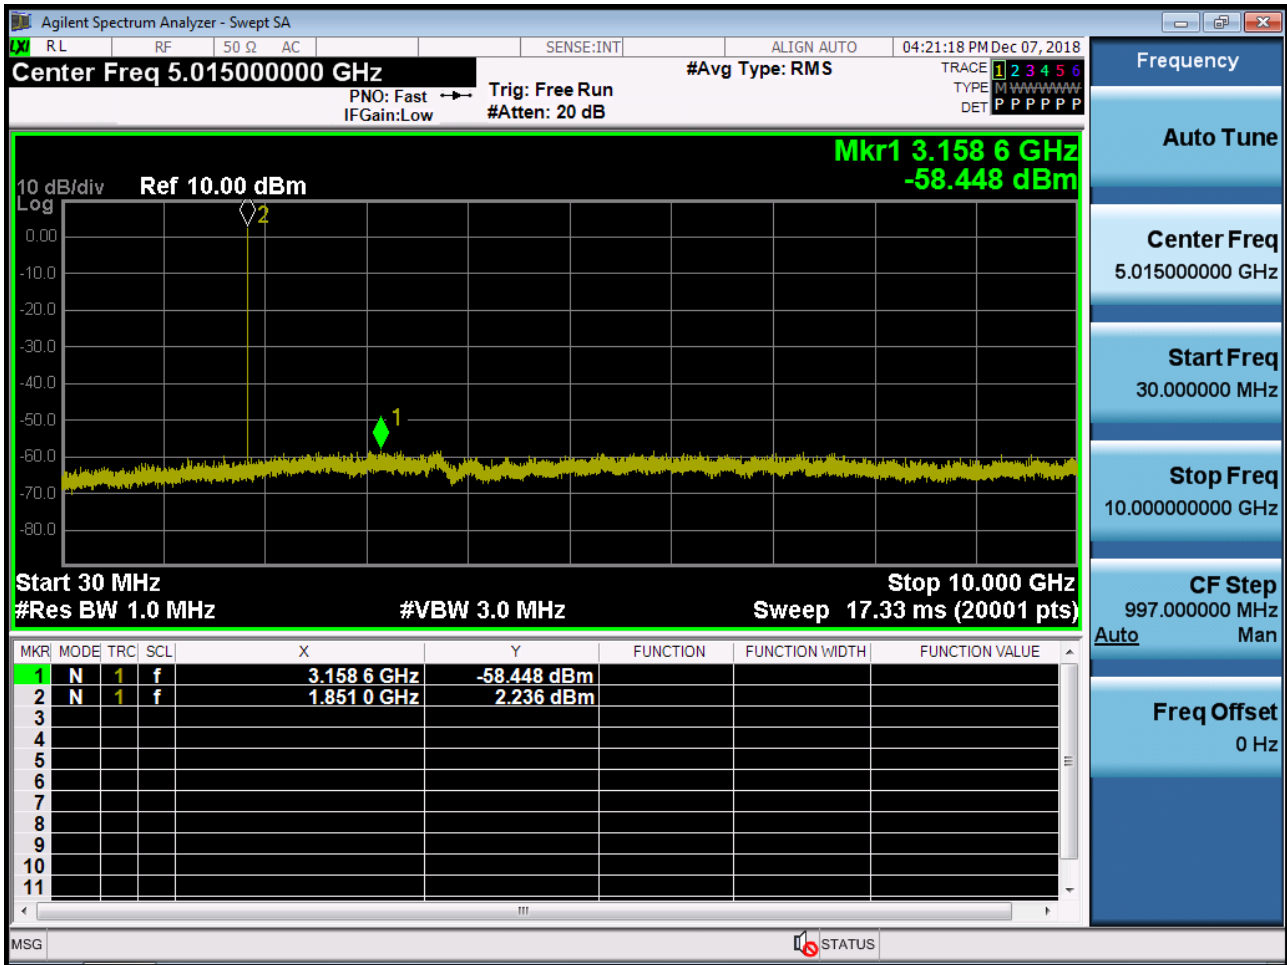

■ GSM1900 MODE (512 CH.) Conducted Spurious Emissions2

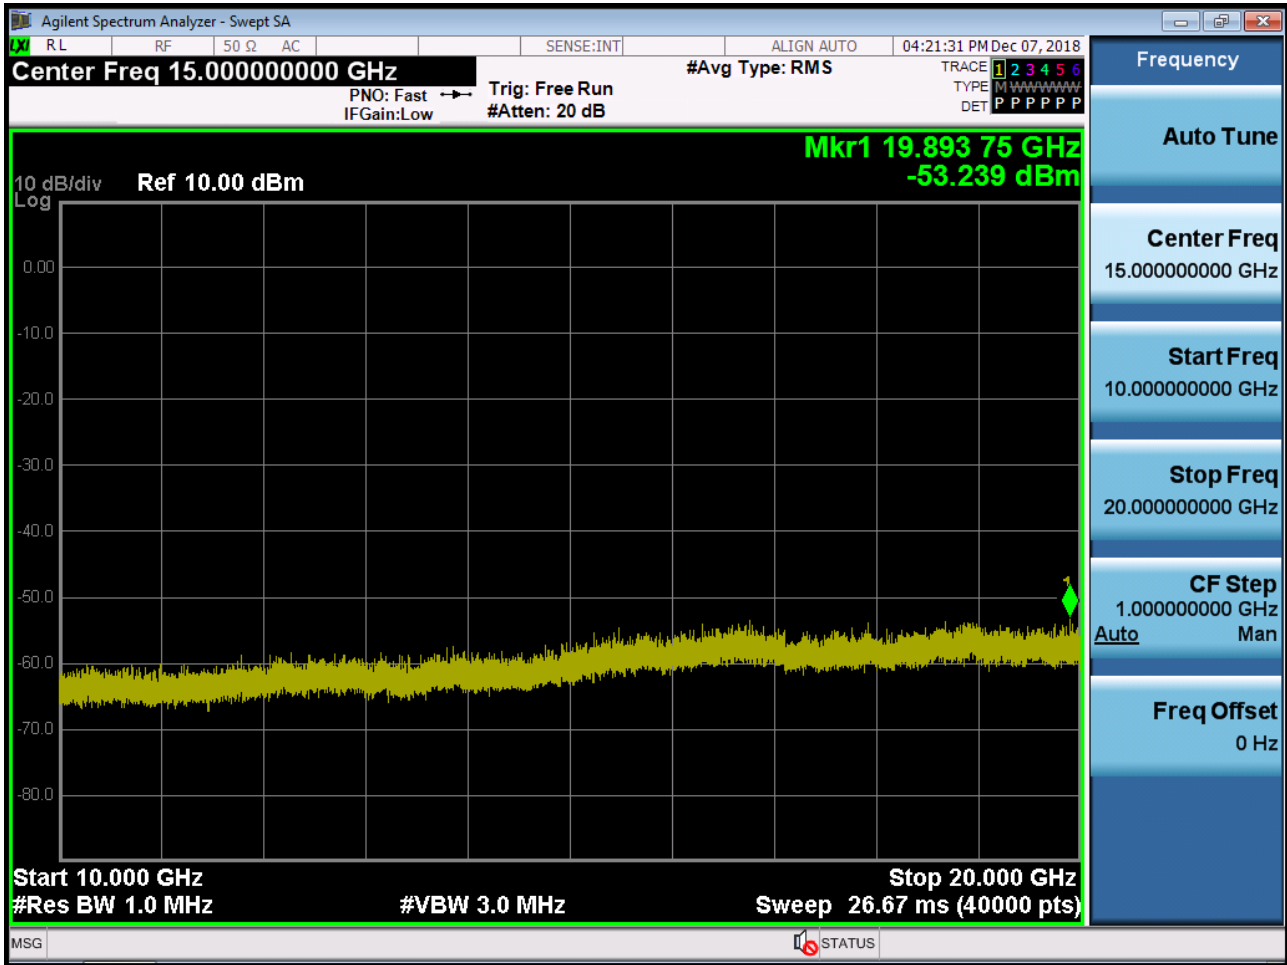


■ GSM1900 MODE (661 CH) Conducted Spurious Emissions1

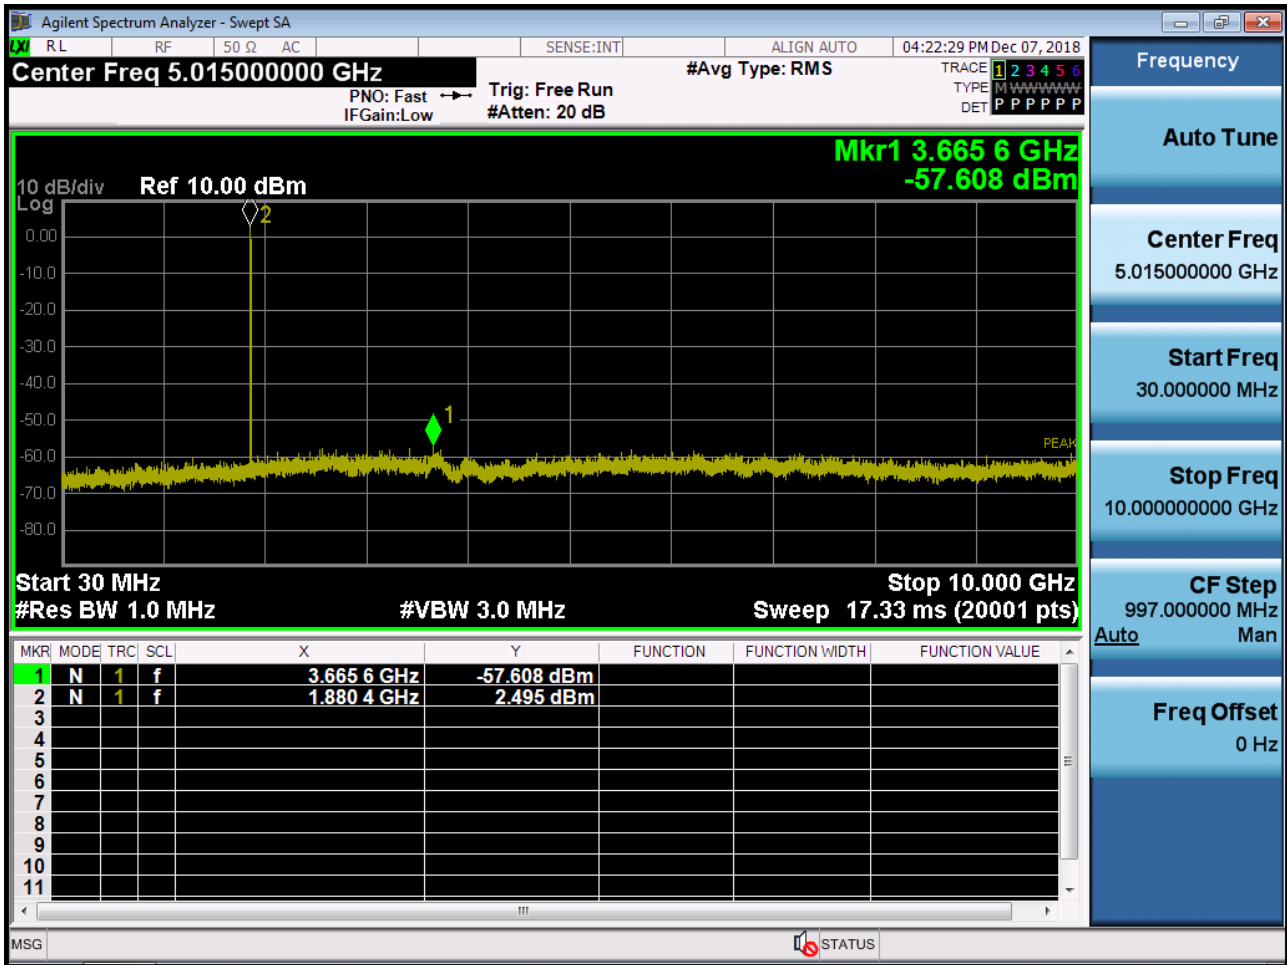





■ GSM1900 MODE (661 CH.) Conducted Spurious Emissions2

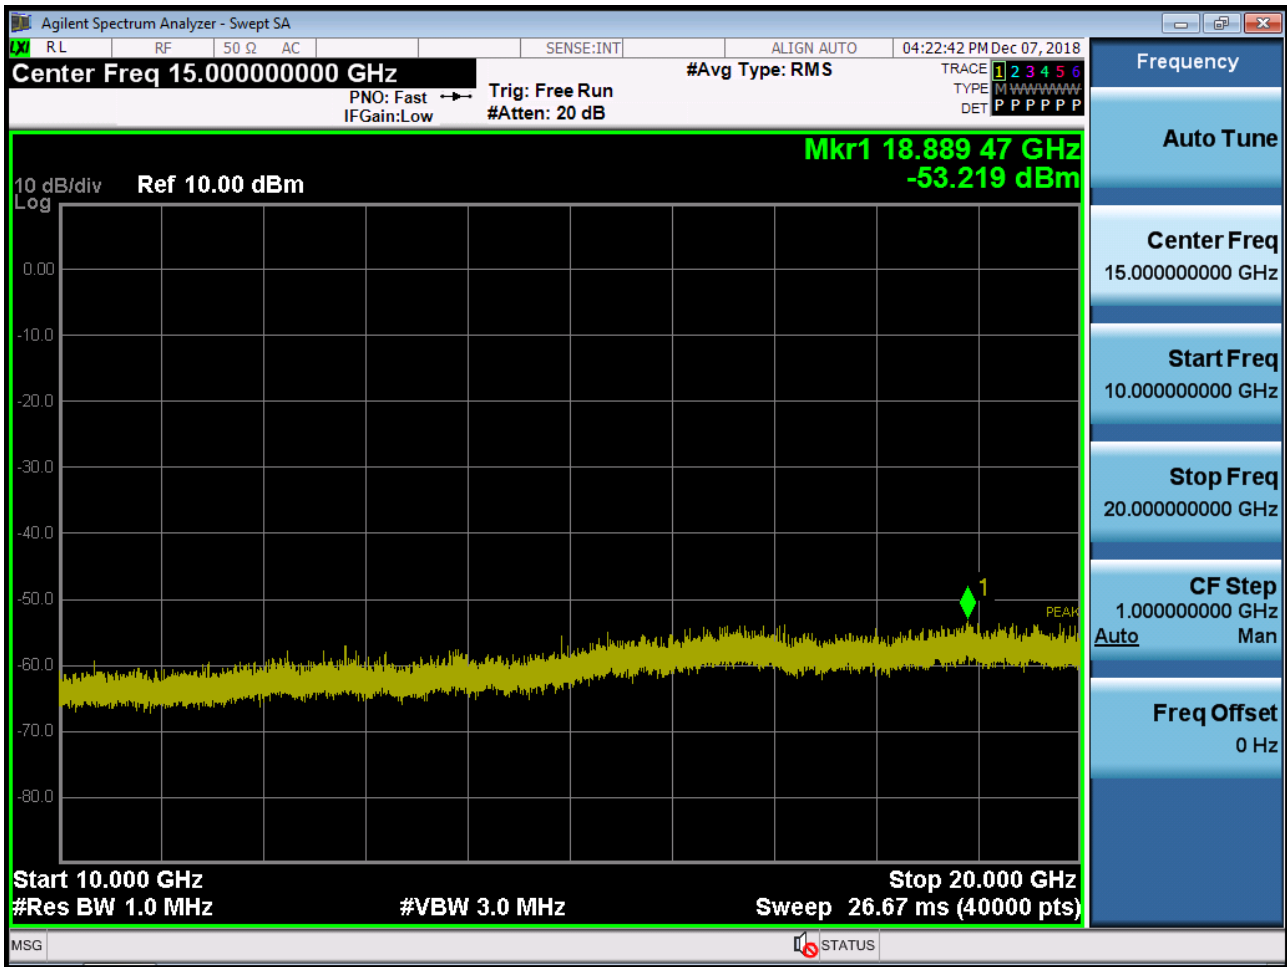


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions1

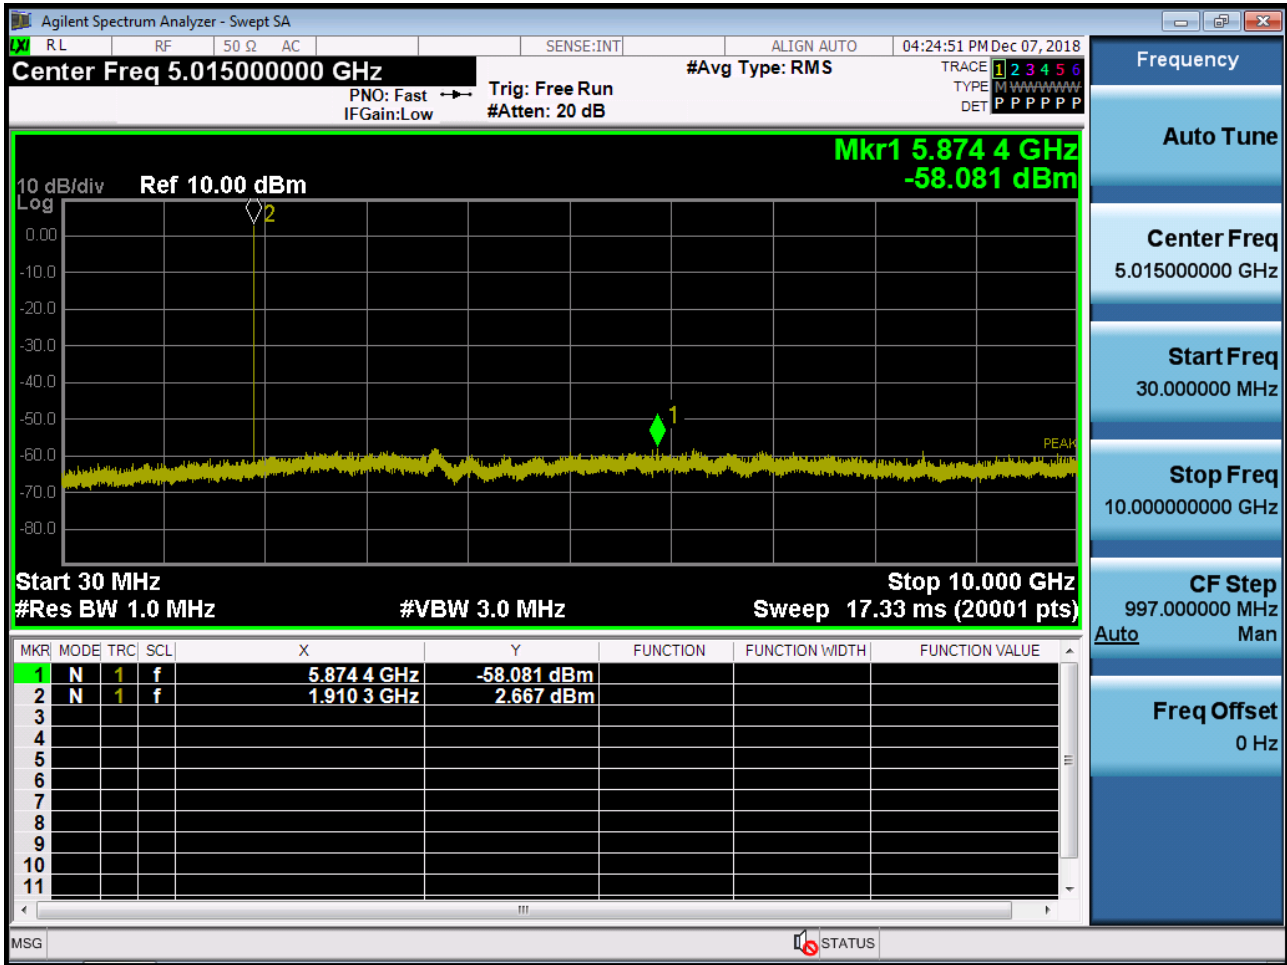


■ GSM1900 MODE (810 CH.) Conducted Spurious Emissions2

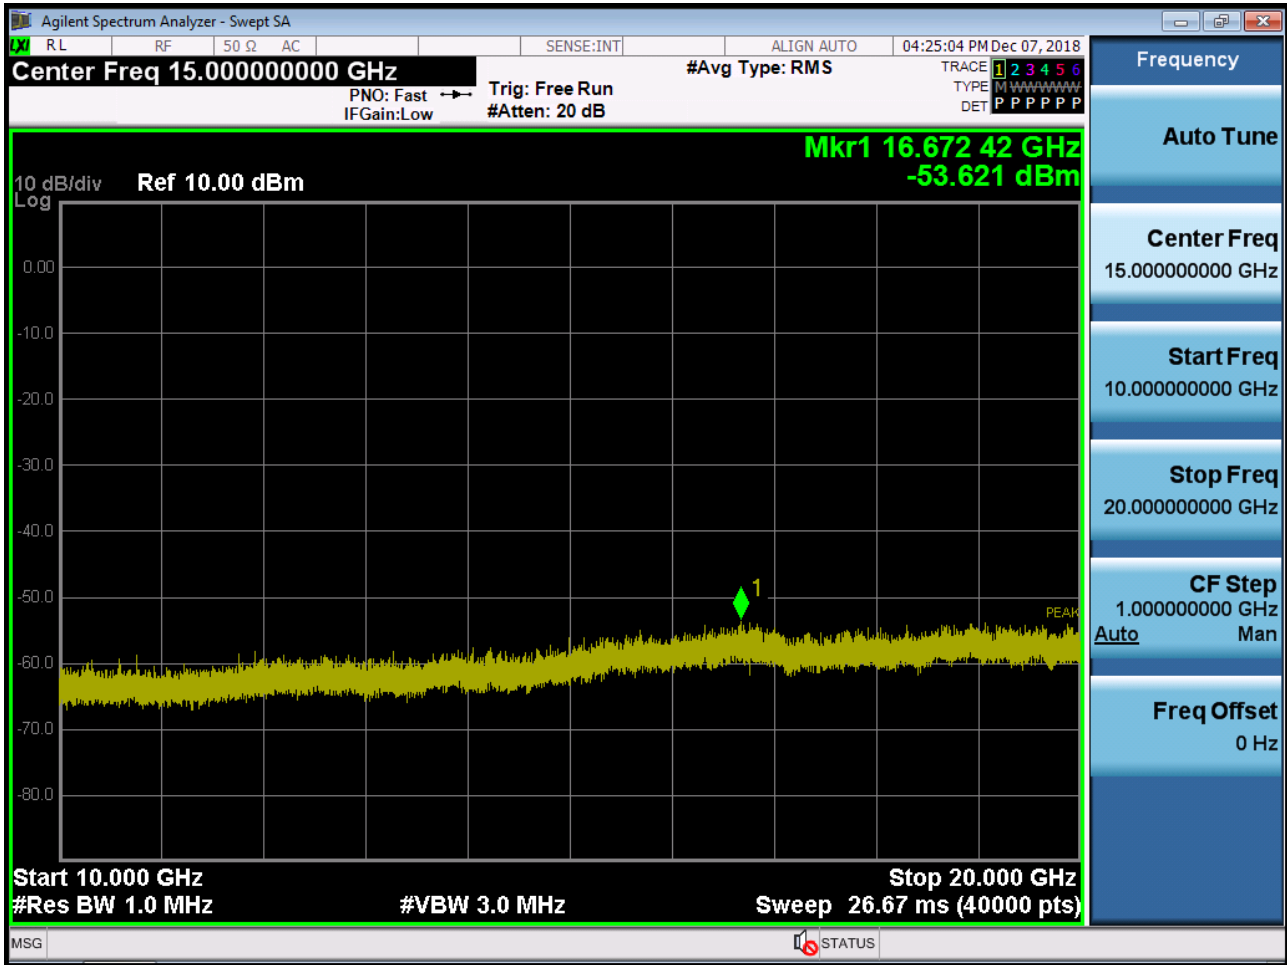


■ WCDMA850 MODE (4132 CH.) Conducted Spurious Emissions

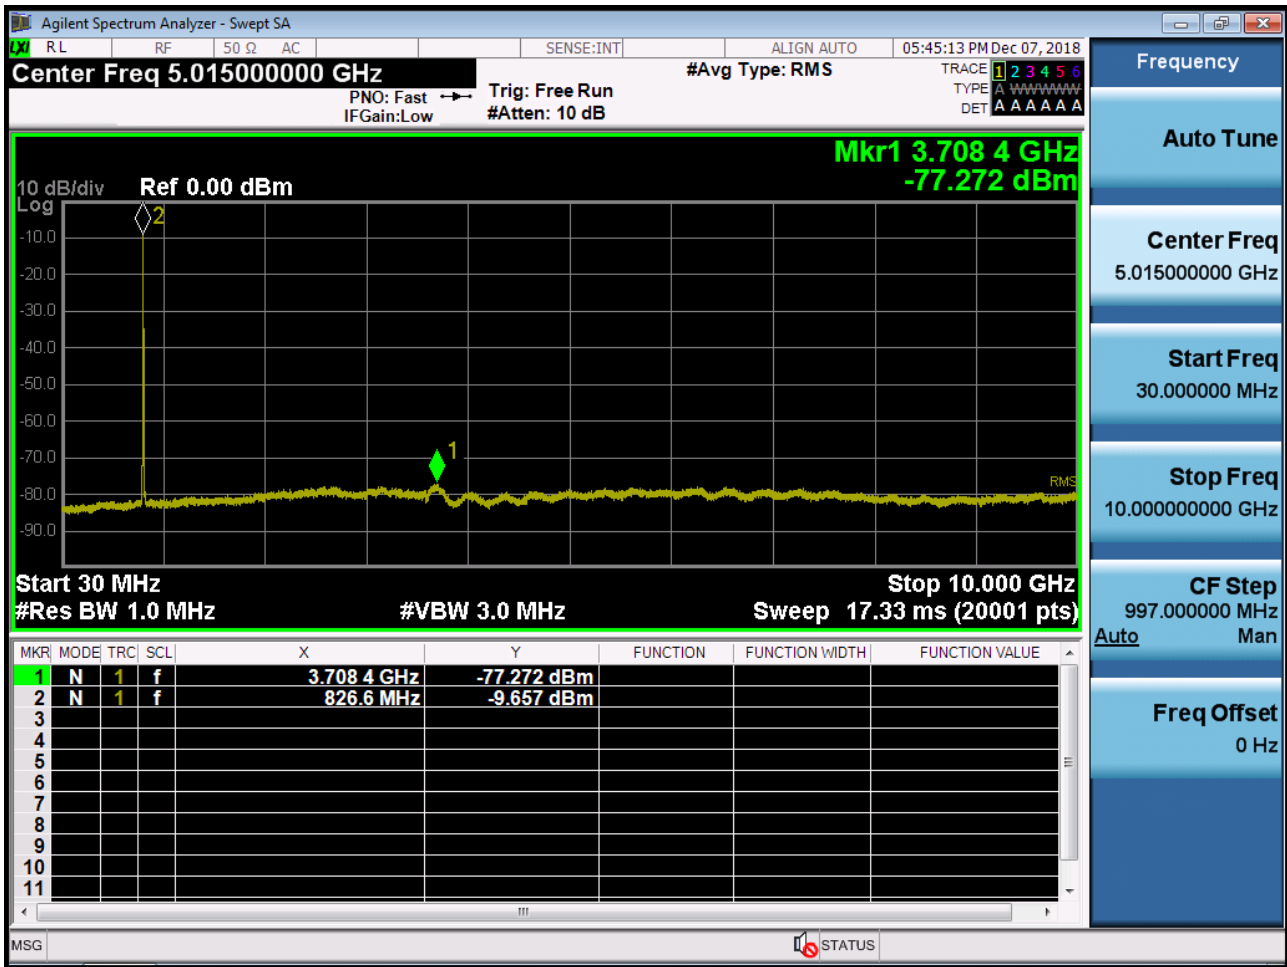


■ WCDMA850 MODE (4183 CH.) Conducted Spurious Emissions

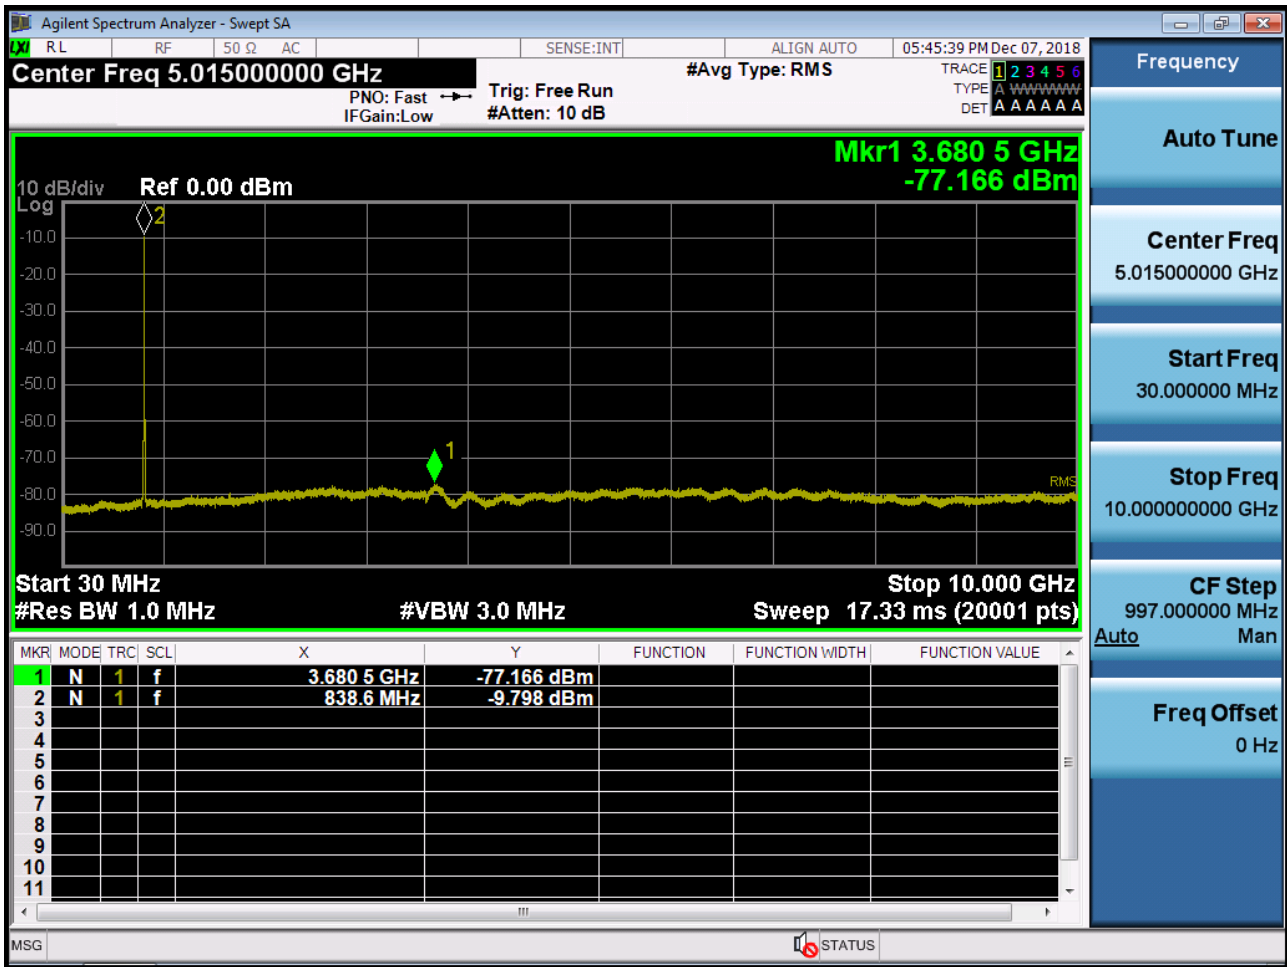


■ WCDMA850 MODE (4233 CH.) Conducted Spurious Emissions

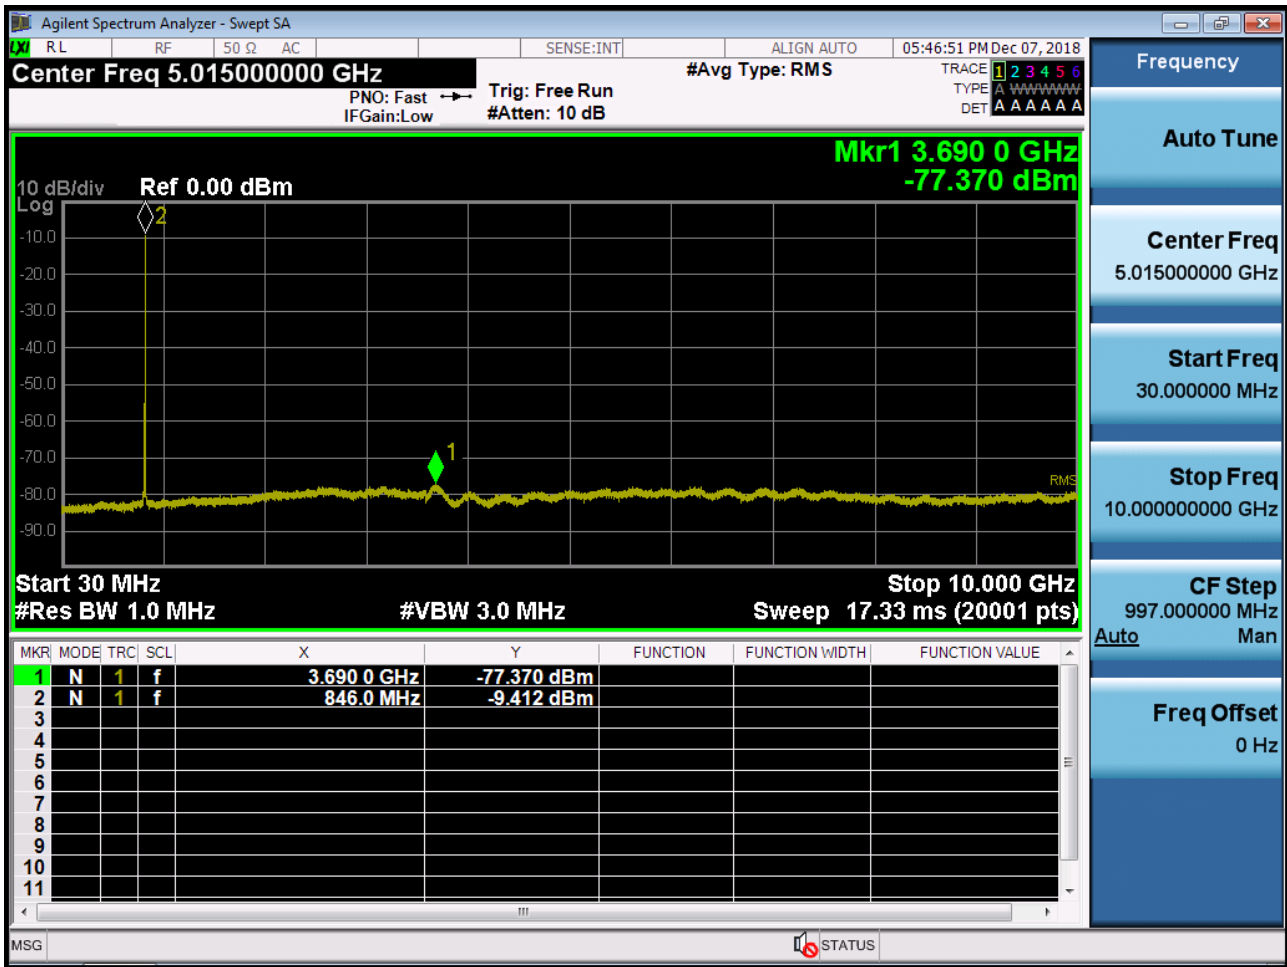

■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions1

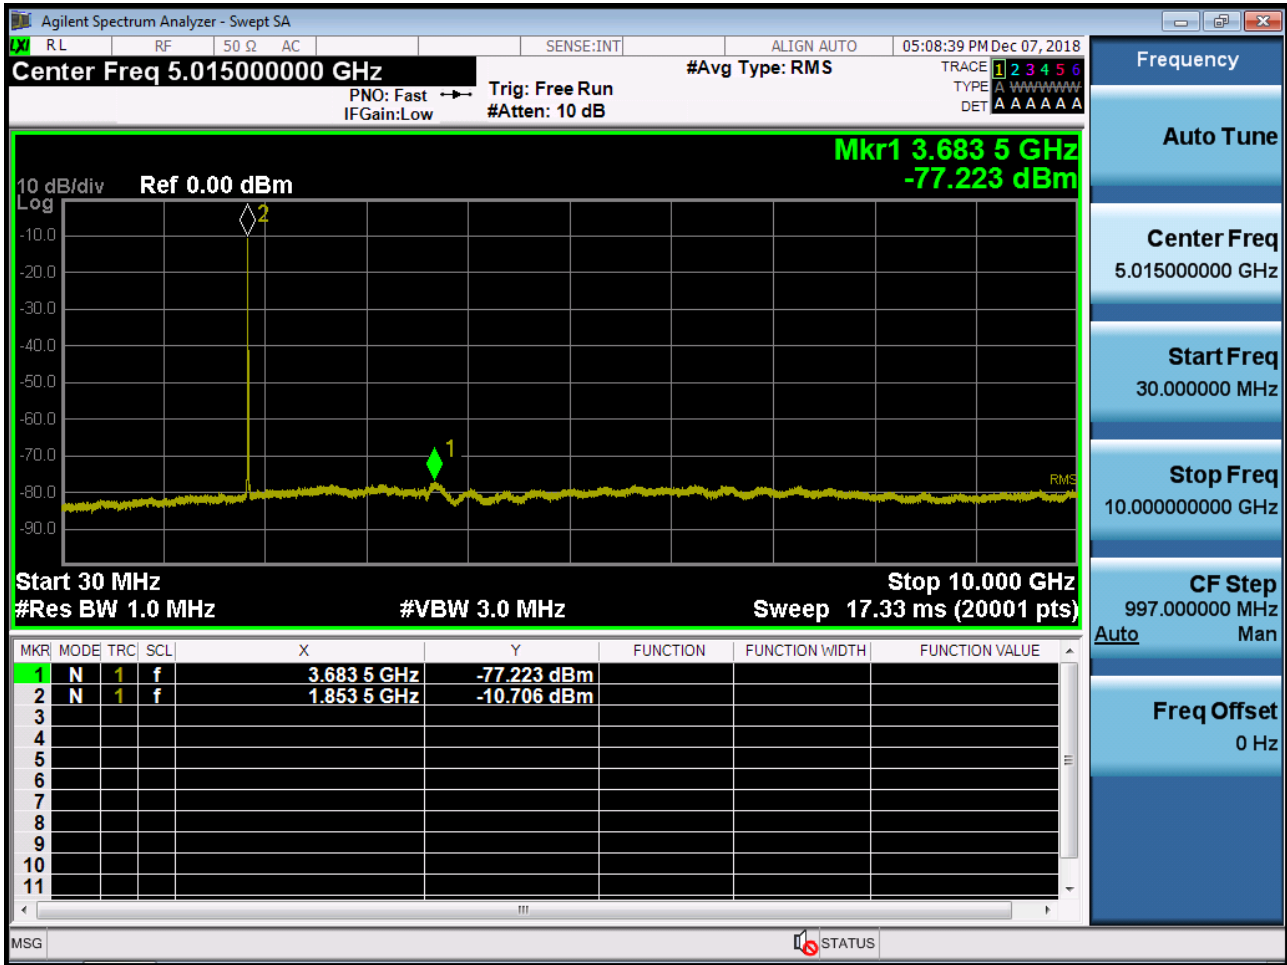


■ WCDMA1900 MODE (9262 CH.) Conducted Spurious Emissions2

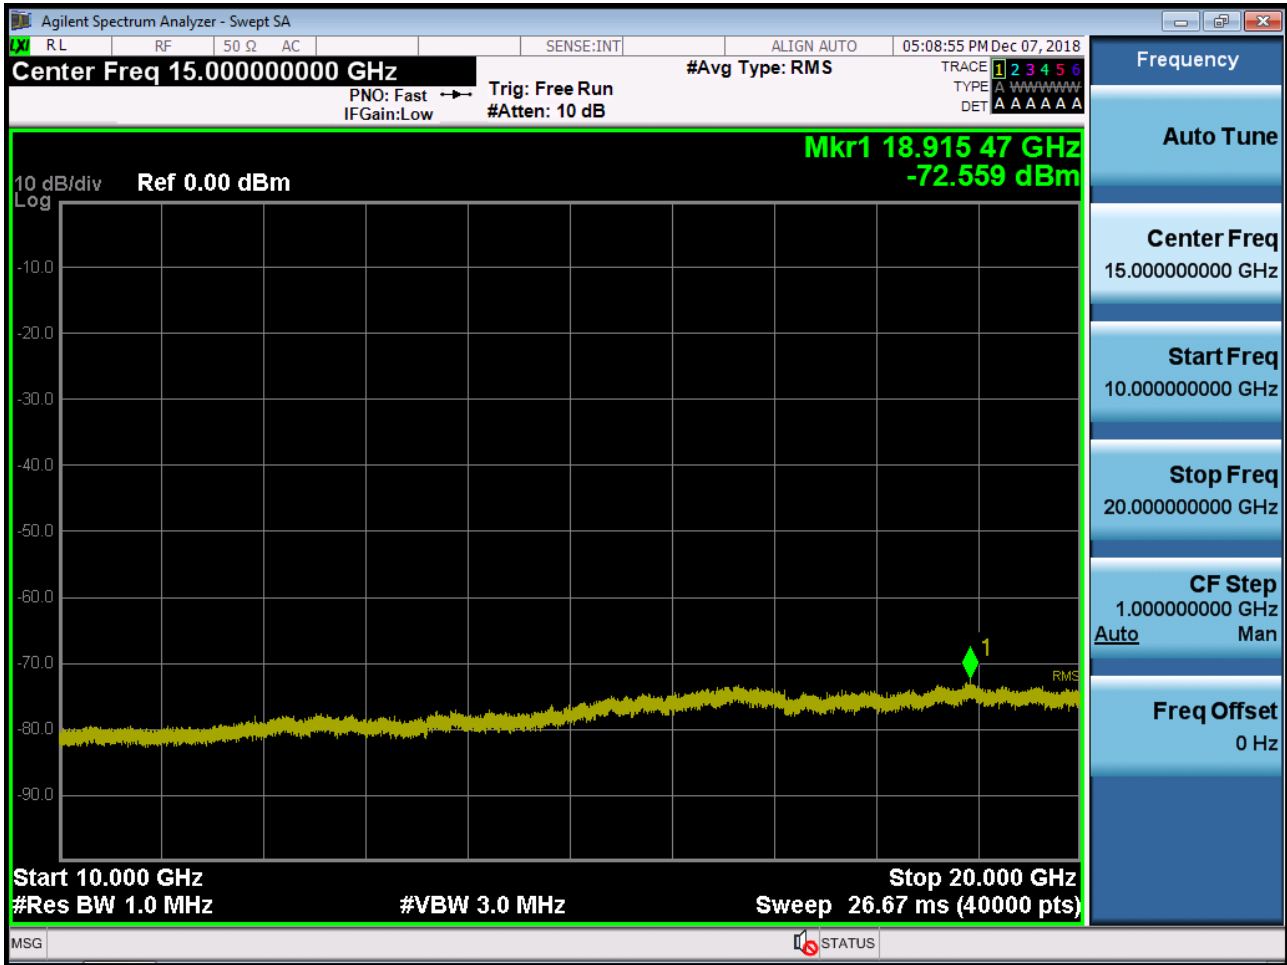




■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions1

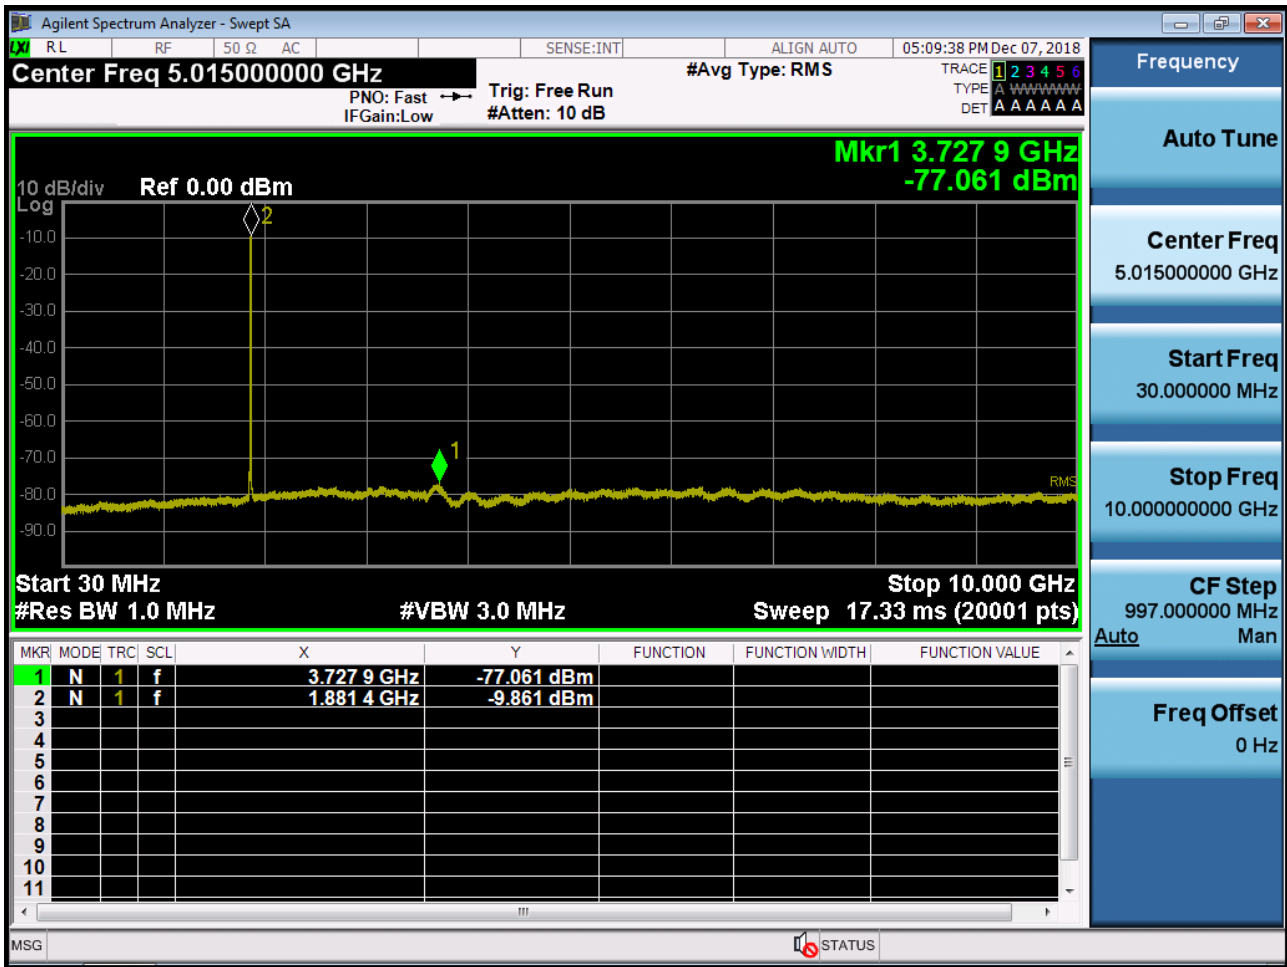


■ WCDMA1900 MODE (9400 CH.) Conducted Spurious Emissions2




■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions1

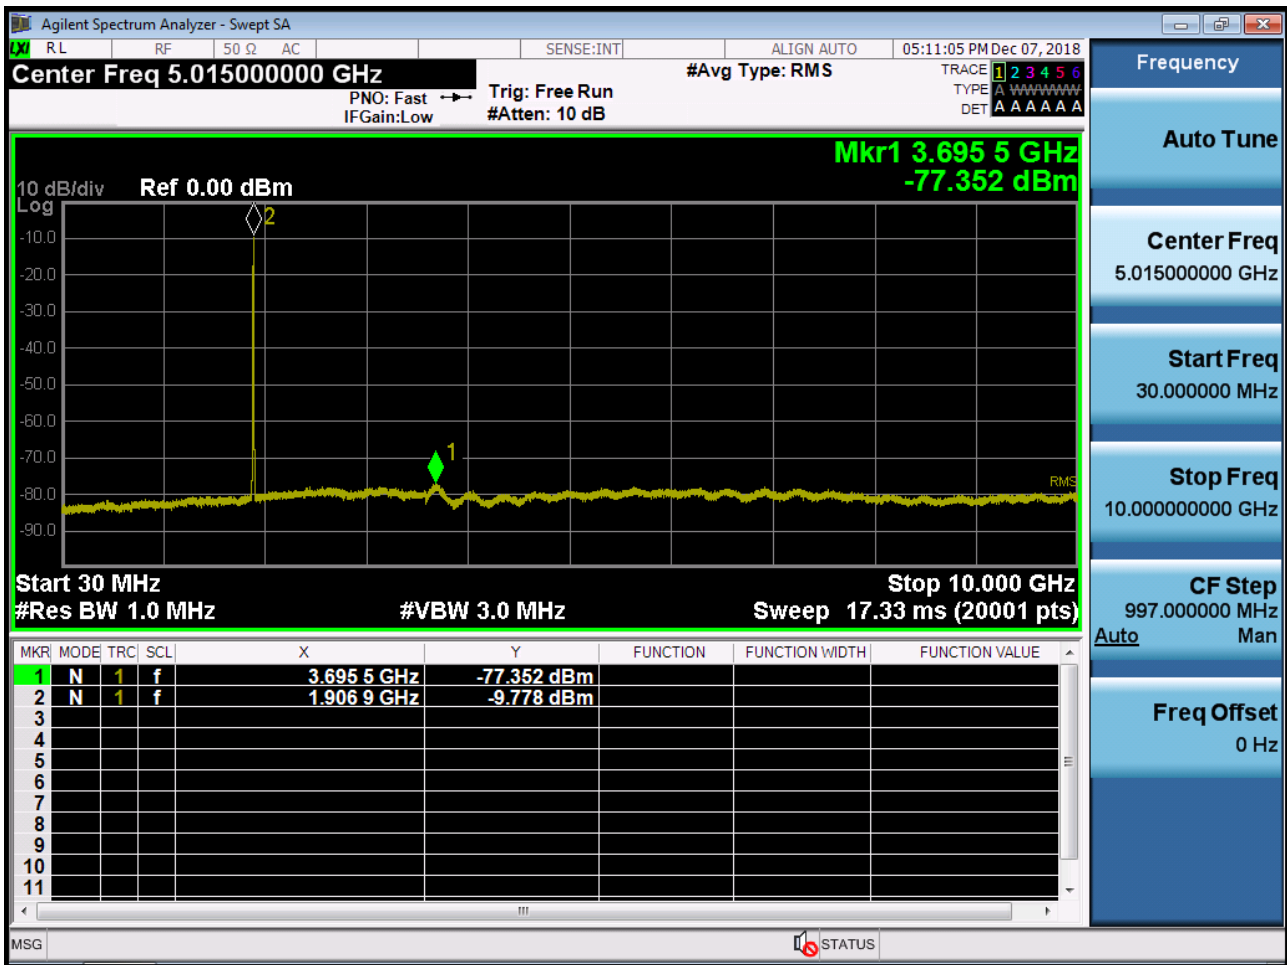

■ WCDMA1900 MODE (9538 CH.) Conducted Spurious Emissions2

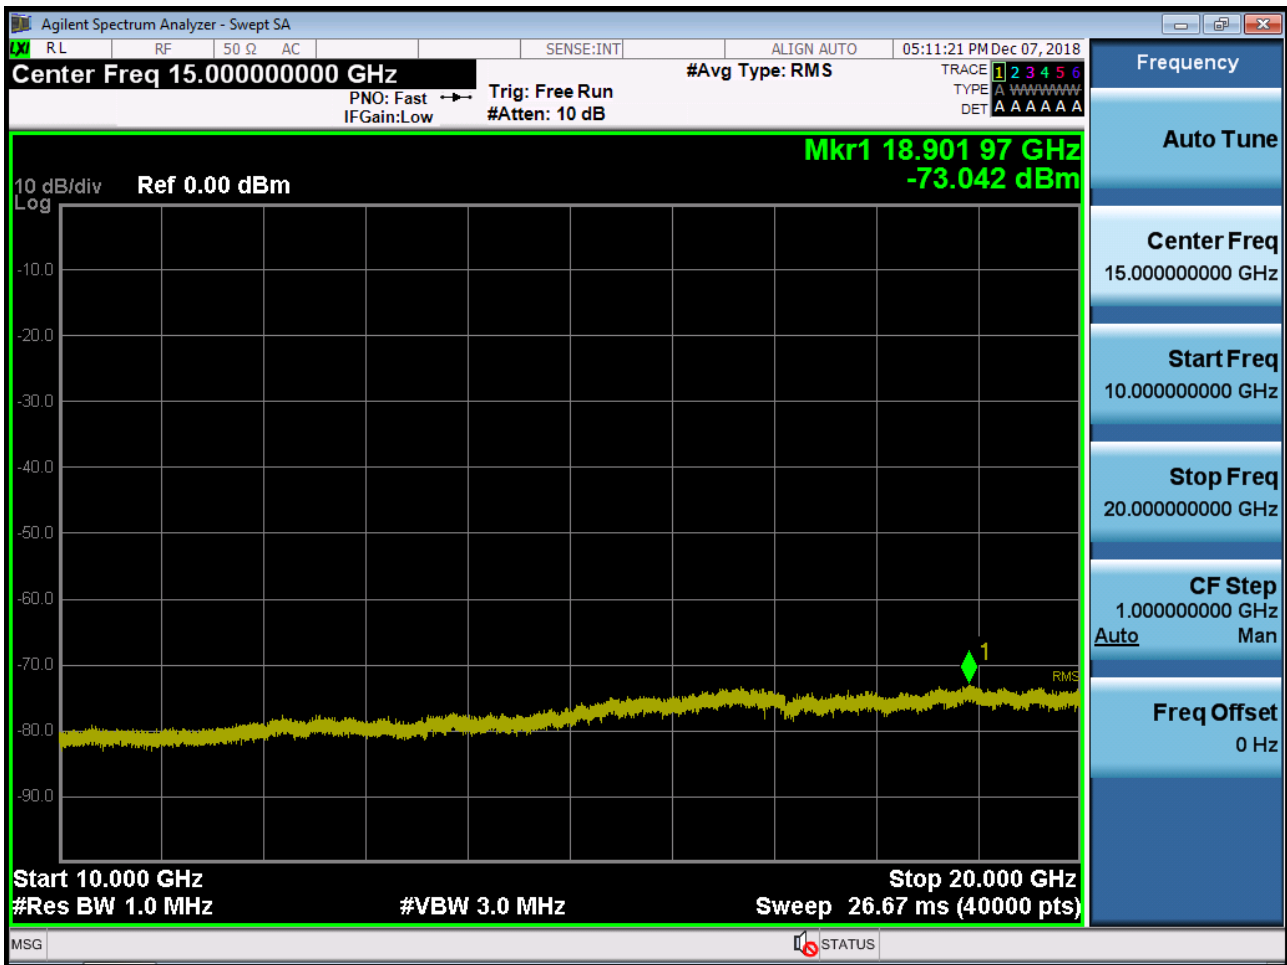


■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions1

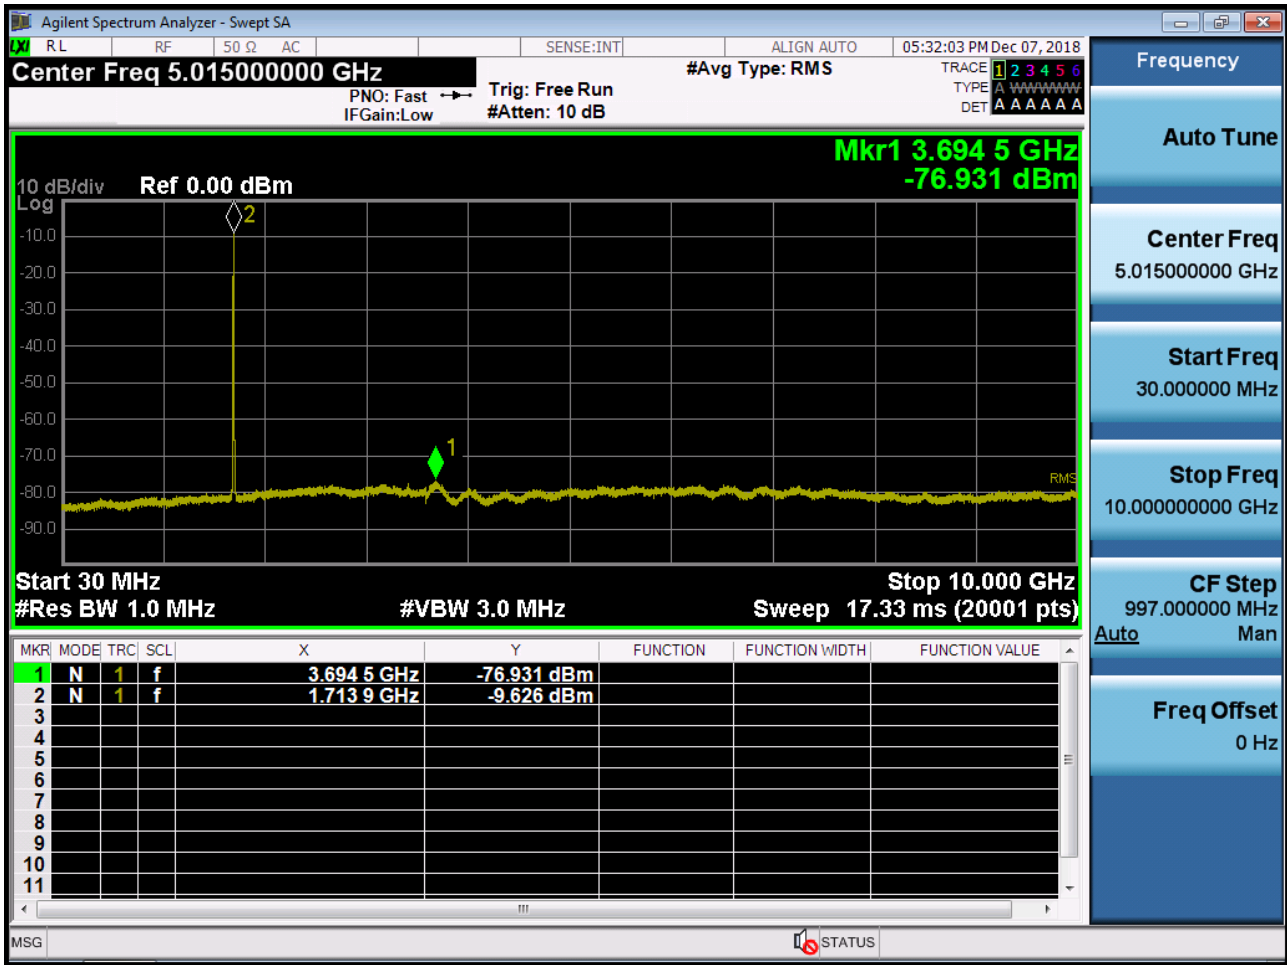

■ WCDMA1700 MODE (1312 CH.) Conducted Spurious Emissions2



■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions1

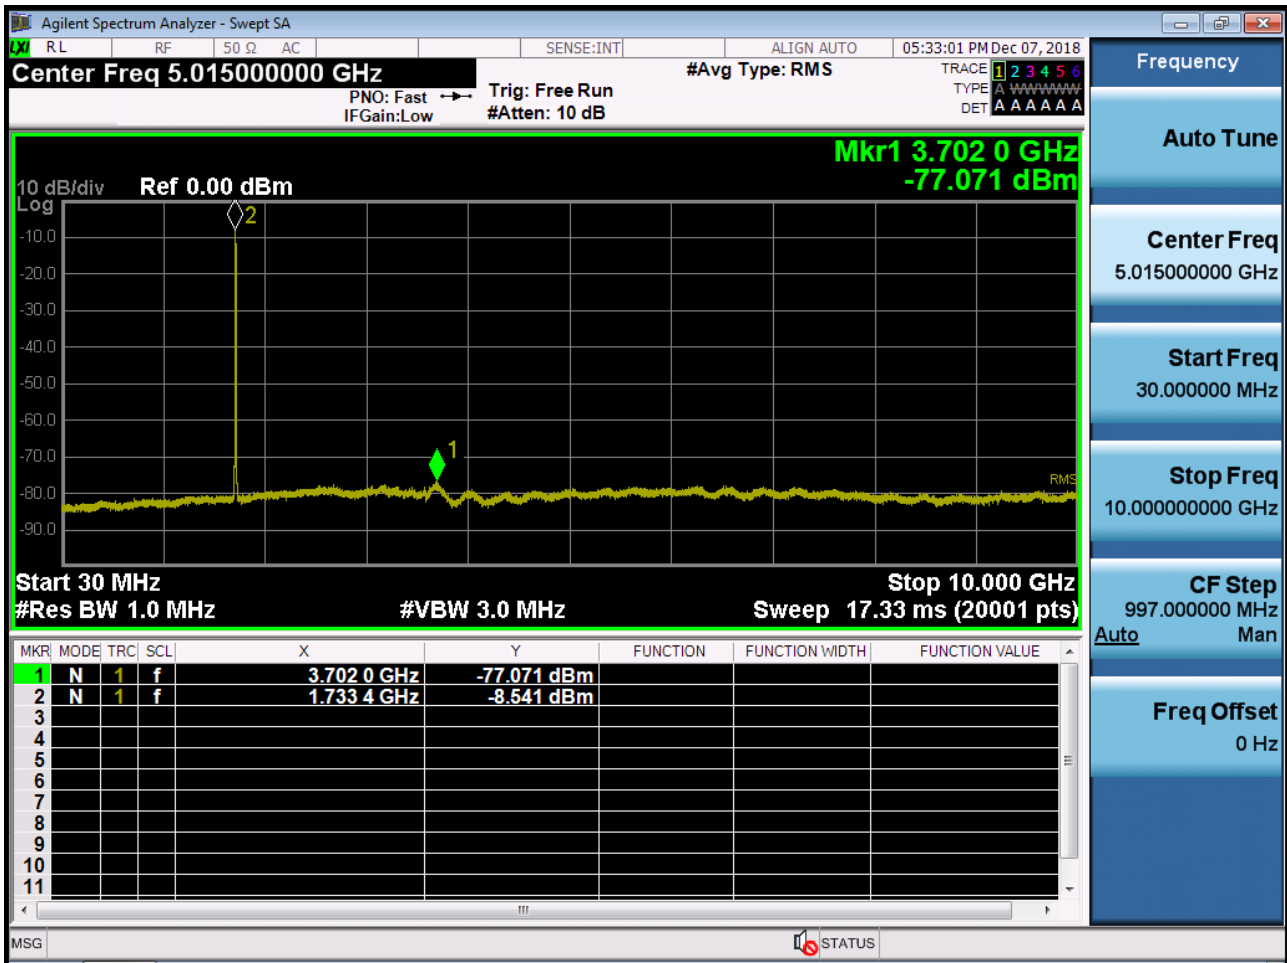


■ WCDMA1700 MODE (1412 CH.) Conducted Spurious Emissions2





■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions1

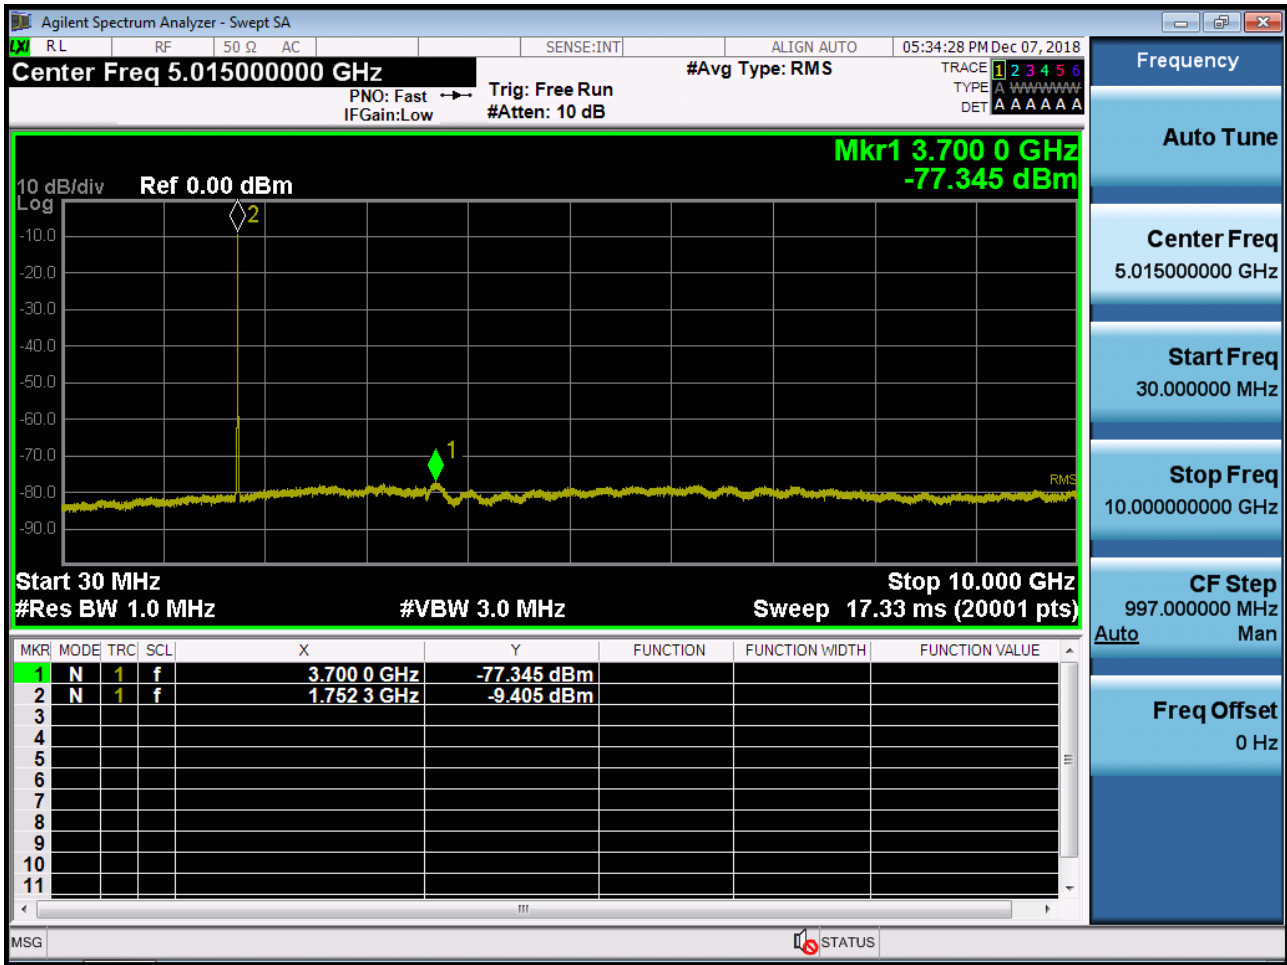

■ WCDMA1700 MODE (1513 CH.) Conducted Spurious Emissions2



## 10. APPENDIX A\_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-1812-FC021-P
2	HCT-RF-1812-FC022-P
3	HCT-RF-1812-FC023-P
4	HCT-RF-1812-FC024-P
5	HCT-RF-1812-FC025-P
6	HCT-RF-1812-FC026-P