



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



## MEASUREMENT REPORT

### FCC PART 15.247 / IC RSS-210 WLAN 802.11a/b/g/n/ac

**Applicant Name:**  
Samsung Electronics, Co. Ltd.  
129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do 443-742, Korea

**Date of Testing:**  
2/5 - 2/17/2014  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
0Y1402030289.A3L

**FCC ID:** A3LSMG900S  
**IC CERTIFICATION NO.:** 649E-SMG900S  
**APPLICANT:** Samsung Electronics, Co. Ltd.

**Application Type:** Certification  
**Model(s):** SM-G900S, SM-G900L, SM-G900K  
**EUT Type:** Portable Handset  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15.247  
**IC Specification(s):** RSS-210 Issue 8  
**Test Procedure(s):** KDB 558074 v03r01, KDB662911

Tx Ant		ANT 1				ANT 2				MIMO			
Mode	Tx Frequency (MHz)	Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted		Avg Conducted		Peak Conducted	
		Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
802.11b	2412 - 2462	49.317	16.93	107.895	20.33	46.666	16.69	99.541	19.98	-	-	-	-
802.11g	2412 - 2462	27.227	14.35	140.281	21.47	25.293	14.03	117.220	20.69	-	-	-	-
802.11n	2412 - 2462	17.498	12.43	109.901	20.41	14.997	11.76	78.886	18.97	17.061	12.32	61.660	17.90
802.11a	5745 - 5825	16.368	12.14	63.387	18.02	17.179	12.35	59.704	17.76	-	-	-	-
802.11n (20MHz)	5745 - 5825	16.368	12.14	66.834	18.25	17.140	12.34	57.280	17.58	16.596	12.20	58.884	17.70
802.11n (40MHz)	5755 - 5795	15.346	11.86	58.614	17.68	17.338	12.39	70.469	18.48	16.749	12.24	57.810	17.62
802.11ac (80MHz)	5775	9.977	9.99	34.514	15.38	10.839	10.35	34.914	15.43	9.772	9.90	41.210	16.15

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 v03r01 and KDB662911. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez  
President



<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset	Page 1 of 120	

## TABLE OF CONTENTS

FCC PART 15.247 MEASUREMENT REPORT .....		3
1.0 INTRODUCTION.....		4
1.1 SCOPE.....		4
1.2 PCTEST TEST LOCATION.....		4
2.0 PRODUCT INFORMATION .....		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 DEVICE CAPABILITIES.....		5
2.3 TEST CONFIGURATION.....		6
2.4 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		6
2.5 LABELING REQUIREMENTS.....		6
3.0 DESCRIPTION OF TEST .....		7
3.1 EVALUATION PROCEDURE.....		7
3.2 AC LINE CONDUCTED EMISSIONS.....		7
3.3 RADIATED EMISSIONS .....		8
4.0 ANTENNA REQUIREMENTS.....		9
5.0 TEST EQUIPMENT CALIBRATION DATA.....		10
6.0 TEST RESULTS .....		11
6.1 SUMMARY.....		11
6.2 6DB BANDWIDTH MEASUREMENT – 802.11A/B/G/N/AC.....		12
6.3 OUTPUT POWER MEASUREMENT – 802.11B/G/N (2.4GHZ).....		33
6.4 POWER SPECTRAL DENSITY (802.11A/B/G/N/AC).....		41
6.5 CONDUCTED EMISSIONS AT THE BAND EDGE.....		63
6.6 CONDUCTED SPURIOUS EMISSIONS.....		78
6.7 RADIATED SPURIOUS EMISSION MEASUREMENTS.....		92
6.8 RADIATED RESTRICTED BAND EDGE MEASUREMENTS.....		104
6.9 LINE-CONDUCTED TEST DATA.....		116
7.0 CONCLUSION .....		120

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset		Page 2 of 120



# MEASUREMENT REPORT

## FCC Part 15.247



### § 2.1033 General Information

**APPLICANT:** Samsung Electronics, Co. Ltd.

**APPLICANT ADDRESS:** 129, Samsung-ro, Maetan dong,  
Yeongtong-gu, Suwon-si, Gyeonggi-do 443-742, Korea

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.247

**IC SPECIFICATION(S):** RSS-210 Issue 8

**MODEL NAME:** SM-G900S, SM-G900L, SM-G900K

**FCC ID:** A3LSMG900S

**Test Device Serial No.:** F1184, 1185, 41A24     Production     Pre-Production     Engineering



**FCC CLASSIFICATION:** Digital Transmission System (DTS)

**DATE(S) OF TEST:** 2/5 - 2/17/2014



**TEST REPORT S/N:** 0Y1402030289.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset	Page 3 of 120	

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.



## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on February 15, 2012.



**Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 4 of 120	

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG900S**. The test data contained in this report pertains only to the emissions due to the EUT's WLAN (DTS) transmitter.

### 2.2 Device Capabilities

This device contains the following capabilities:

1900 GSM/GPRS, 850/1900 WCDMA/HSPA, Band 5, 7, 17 LTE 5/10MHz, 802.11a/b/g/n/ac WLAN (DTS/NII), Bluetooth (1x,EDR, LE), NFC, ANT+

**Note:** 5GHz WLAN (DTS/NII) operation is possible in 20MHz, 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section 6.0 b) of KDB 558074 v03r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

- 802.11b – 99.87%
- 802.11a/g/n 20MHz Bandwidth – 99.70%
- 802.11n 40MHz Bandwidth – 98.81%
- 802.11ac 80MHz Bandwidth – 98.04%

The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM	
		ANT 1	ANT 2	ANT 1	ANT 2
2.4 GHz	802.11b	✓	✓	✗	✗
	802.11g	✓	✓	✗	✗
	802.11n	✓	✓	✓	✓
5 GHz	802.11a	✓	✓	✗	✗
	802.11n(HT20)	✓	✓	✓	✓
	802.11n(HT40)	✓	✓	✓	✓
	802.11ac(80)	✓	✓	✓	✓



**Table 2-1 Possible EUT MIMO Configurations**

✓ = Support ; ✗ = NOT Support

**SISO** = Single Input Single Output

**SDM** = Spatial Diversity Multiplexing – MIMO function

CDD or Cyclic Delay Diversity MIMO function is also a capability of the EUT. However, since CDD only alters the system by transmitting a phase shifted (i.e. cyclical) copy of the original signal within the same allotted bandwidth and using the same Tx power, it was determined that CDD operation was the same, in regards to matters relating to the bandwidth and powers, as SDM MIMO mode, which is addressed in the report. Thus, no further measurements were performed for CDD MIMO operation.

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset		Page 5 of 120

## 2.3 Test Configuration

The Samsung Portable Handset FCC ID: A3LSMG900S was tested per the guidance of KDB 558074 v03r01 and KDB662911. ANSI C63.10-2009 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing. See Sections 3.2, 3.3, and 6.1 of this test report for a description of the AC line conducted emissions, radiated emissions, and antenna port conducted emissions test setups, respectively.



## 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

## 2.5 Labeling Requirements

Per 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the trade name and FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 6 of 120	

## 3.0 DESCRIPTION OF TEST

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2009), and the guidance provided in KDB 558074 v03r01 were used in the measurement of the **Samsung Portable Handset FCC ID: A3LSMG900S**.

Deviation from measurement procedure.....None



### 3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or resolution, clock or data exchange speed, scrolling H pattern to the EUT and/or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 6.9. Automated test software was used to perform the AC line conducted emissions testing. Automated measurement software utilized is Rohde & Schwarz EMC32, Version 8.51.0.



FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 7 of 120	

### 3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. An ETS Lindgren Model 2188 raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. A 78cm high PVC support structure is placed on top of the turntable. A ¾" (~1.9cm) sheet of high density polyethylene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. For the EUT positioning, "H" is defined with the EUT lying flat on the test surface, "H2" is defined with the EUT standing up on its side, and "V" is defined with the EUT standing upright.

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset	Page 8 of 120	

## 4.0 ANTENNA REQUIREMENTS

**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the Portable Handset are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**



The **Samsung Portable Handset FCC ID: A3LSMG900S** unit complies with the requirement of §15.203.

Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437		

Ch.	BW (MHz)	Frequency (MHz)
149	20	5745
151	20 / 40	5755
153	20	5765
155	20 / 80	5775
157	20	5785

Ch.	BW (MHz)	Frequency (MHz)
159	20 / 40	5795
161	20	5805
163	20	5815
165	20	5825

**Table 4-1. Frequency/ Channel Operations**



<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset		Page 9 of 120

## 5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	RE1	Radiated Emissions Cable Set (UHF/EHF)	3/29/2013	Annual	3/29/2014	N/A
-	WL25-1	Conducted Cable Set (25GHz)	1/29/2014	Annual	1/29/2015	N/A
-	RE2	Radiated Emissions Cable Set (VHF/UHF)	3/29/2013	Annual	3/29/2014	N/A
-	WL40-1	Conducted Cable Set (40GHz)	1/29/2014	Annual	1/29/2015	N/A
Agilent	8447D	Broadband Amplifier	5/31/2013	Annual	5/31/2014	2443A01900
Agilent	E4448A	PSA (3Hz-50GHz) Spectrum Analyzer	4/18/2013	Annual	4/18/2014	US42510244
Agilent	N9020A	MXA Signal Analyzer	10/29/2013	Annual	10/29/2014	US46470561
Agilent	N9030A	PXA Signal Analyzer (44GHz)	1/17/2014	Annual	1/17/2015	MY52350166
Anritsu	ML2495A	Power Meter	10/31/2013	Annual	10/31/2014	1039008
Anritsu	MA2411B	Pulse Sensor	7/16/2013	Annual	7/16/2014	1315051
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	6/26/2013	Annual	6/26/2014	121034
Emco	3115	Horn Antenna (1-18GHz)	1/30/2014	Biennial	1/30/2016	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	1/20/2012	Triennial	1/20/2015	9203-2178
Espec	ESX-2CA	Environmental Chamber	4/16/2013	Annual	4/16/2014	17620
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	7/24/2013	Biennial	7/24/2015	125518
ETS Lindgren	3160-09	18-26.5 GHz Standard Gain Horn	5/30/2012	Biennial	5/30/2014	135427
Huber+Suhner	Sucoflex 102A	40GHz Radiated Cable	1/30/2014	Annual	1/30/2015	251425001
K & L	6000/T18000	High Pass Filter	2/7/2014	Annual	2/7/2015	1
Mini-Circuits	VHF-3100+	High Pass Filter	1/27/2014	Annual	1/27/2015	30841
Rohde & Schwarz	TS-PR18	1-18 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100071
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	5/31/2013	Annual	5/31/2014	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	1/27/2014	Annual	1/27/2015	100342
Solar Electronics	8012-50-R-24-BNC	Line Impedance Stabilization Network	6/20/2013	Biennial	6/20/2015	310233
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	1/28/2014	Biennial	1/28/2016	A051107

**Table 5-1. Annual Test Equipment Calibration Schedule**

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset	Page 10 of 120	

## 6.0 TEST RESULTS

### 6.1 Summary



Company Name: Samsung Electronics, Co. Ltd.  
 FCC ID: A3LSMG900S  
 FCC Classification: Digital Transmission System (DTS)  
 Data Rate(s) Tested: 1Mbps, 2Mbps, 5.5Mbps, 11Mbps (b)  
6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps, 54Mbps (a/g)  
6.5/7.2Mbps, 13/14.4Mbps, 19.5/21.7Mbps, 26/28.9Mbps, 39/43.3Mbps,  
52/57.8Mbps, 58.5/65Mbps, 65/72.2Mbps (n – 20MHz)  
13.5/15Mbps, 27/30Mbps, 40.5/45Mbps, 54/60Mbps, 81/90Mbps, 108/120Mbps,  
121.5/135Mbps, 135/150Mbps (n – 40MHz)  
29.3/32.5Mbps, 58.5/65Mbps, 87.8/97.5Mbps, 117/130Mbps, 175.5/195Mbps,  
234/260Mbps, 263.3/292.5Mbps, 292.5/325Mbps, 351/390Mbps, 390/433.3Mbps  
(ac – 80MHz BW)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
<b>TRANSMITTER MODE (TX)</b>						
15.247(a)(2)	RSS-210 [A8.2]	6dB Bandwidth	> 500kHz	CONDUCTED	PASS	Section 6.2
15.247(b)(3)	RSS-210 [A8.4]	Transmitter Output Power	< 1 Watt		PASS	Sections 6.3
15.247(e)	RSS-210 [A8.2]	Transmitter Power Spectral Density	< 8dBm / 3kHz Band		PASS	Section 6.4
15.247(d)	RSS-210 [A8.5]	Band Edge / Out-of-Band Emissions	Conducted $\geq$ 30dBc		PASS	Sections 6.5, 6.6
15.205 15.209	RSS-210 [A8.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	RADIATED	PASS	Sections 6.7, 6.8
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 6.9

**Table 6-1. Summary of Test Results**

**Notes:**

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST “WLAN Automation”, Version 2.5.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 11 of 120	

## 6.2 6dB Bandwidth Measurement – 802.11a/b/g/n/ac

§15.247(a)(2); RSS-210 [A8.2]

### Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the transmitter antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

***The minimum permissible 6dB bandwidth is 500 kHz.***

### Test Procedure Used


KDB 558074 v03r01 – Section 8.2 Option 2

### Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100kHz
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize

### Test Setup

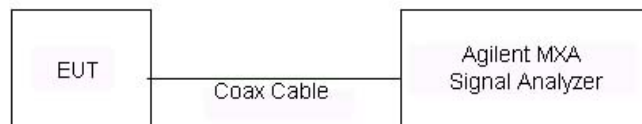

The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-1. Test Instrument & Measurement Setup**

### Test Notes



None


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 12 of 120	

## Antenna-1 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	9.053	0.500	Pass
2437	6	b	1	9.071	0.500	Pass
2462	11	b	1	9.065	0.500	Pass
2412	1	g	6	16.31	0.500	Pass
2437	6	g	6	16.38	0.500	Pass
2462	11	g	6	16.40	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.32	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	17.61	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	17.62	0.500	Pass
5745	149	a	6	16.39	0.500	Pass
5785	157	a	6	16.37	0.500	Pass
5825	165	a	6	16.37	0.500	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.58	0.500	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.62	0.500	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.62	0.500	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	36.38	0.500	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	36.35	0.500	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.54	0.500	Pass

**Table 6-2. Conducted Bandwidth Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 13 of 120	

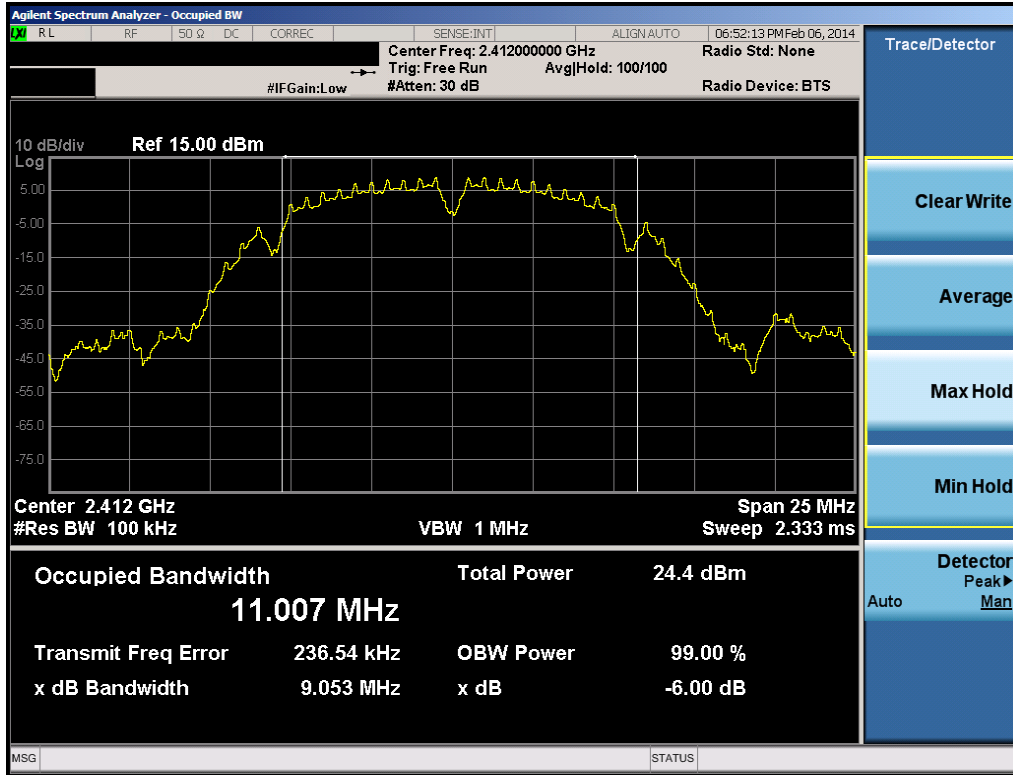


Plot 6-1. 6dB Bandwidth Plot (802.11b – Ch. 1)

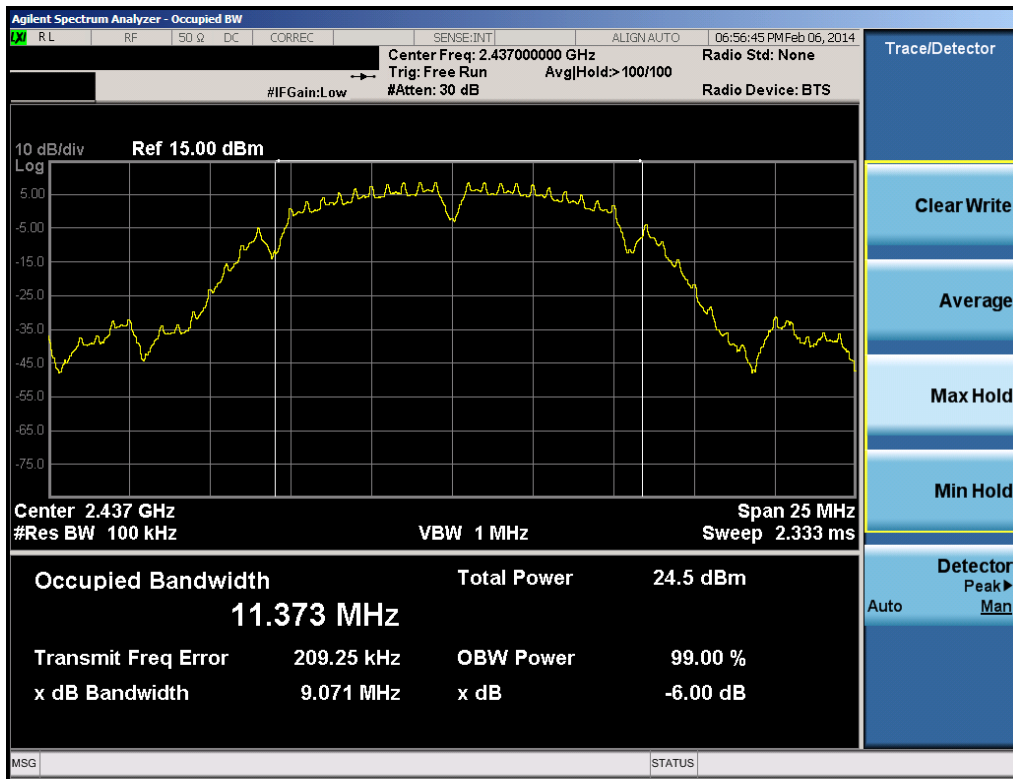


Plot 6-2. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 14 of 120

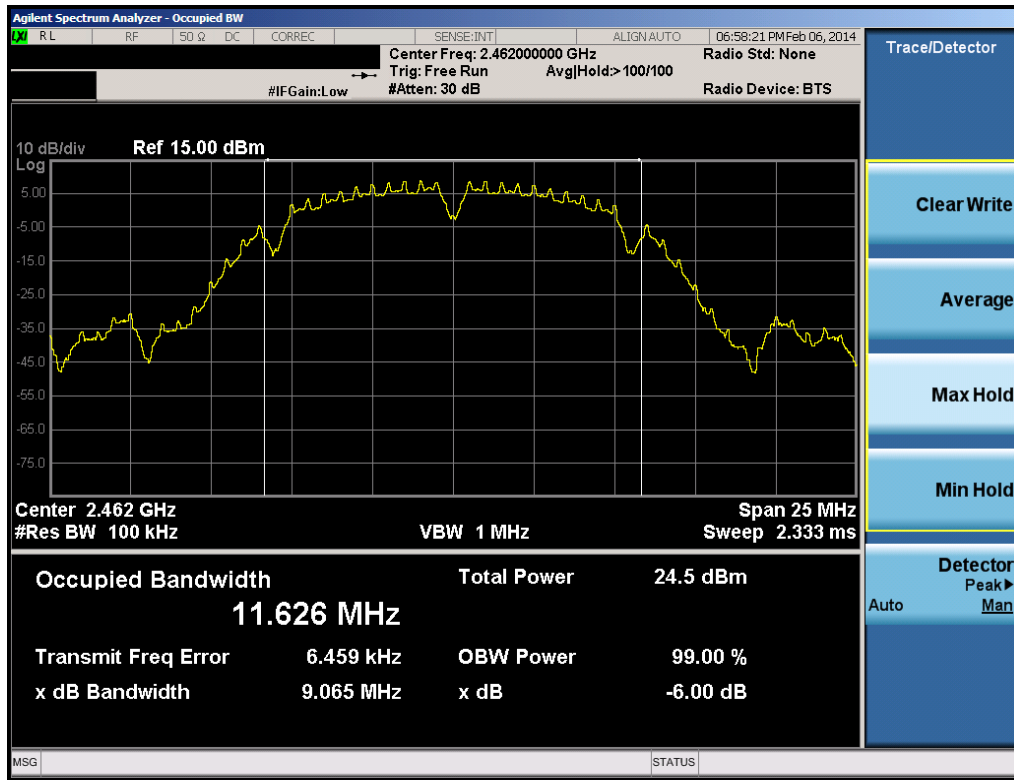


Plot 6-3. 6dB Bandwidth Plot (802.11b – Ch. 11)

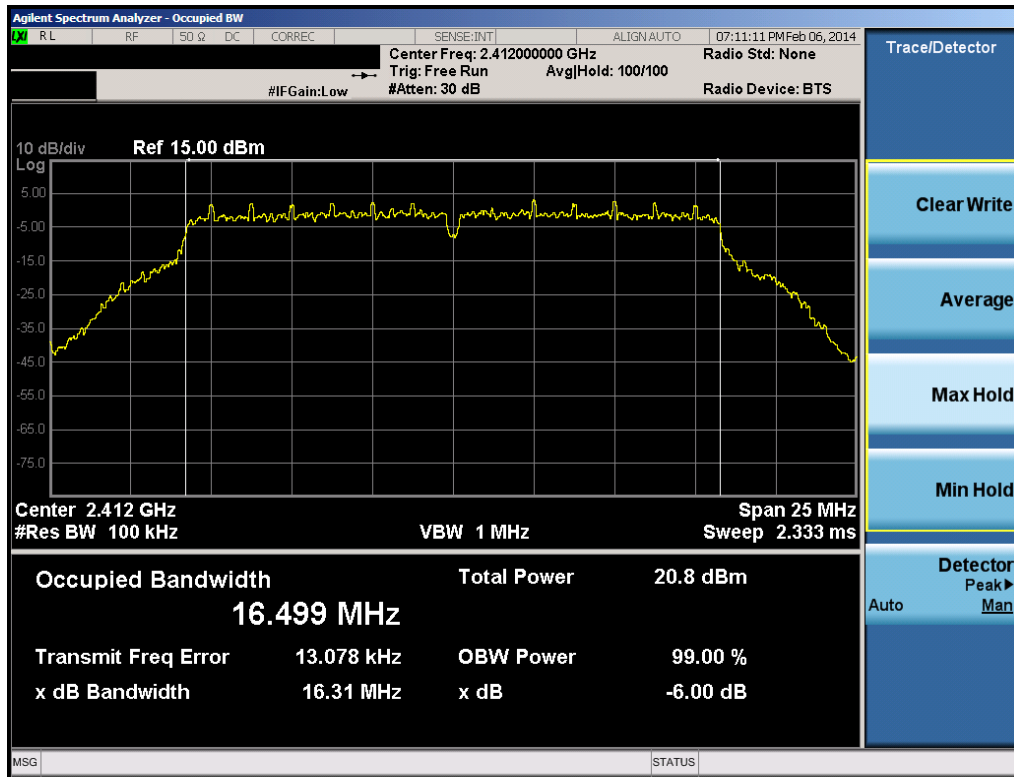


Plot 6-4. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 15 of 120

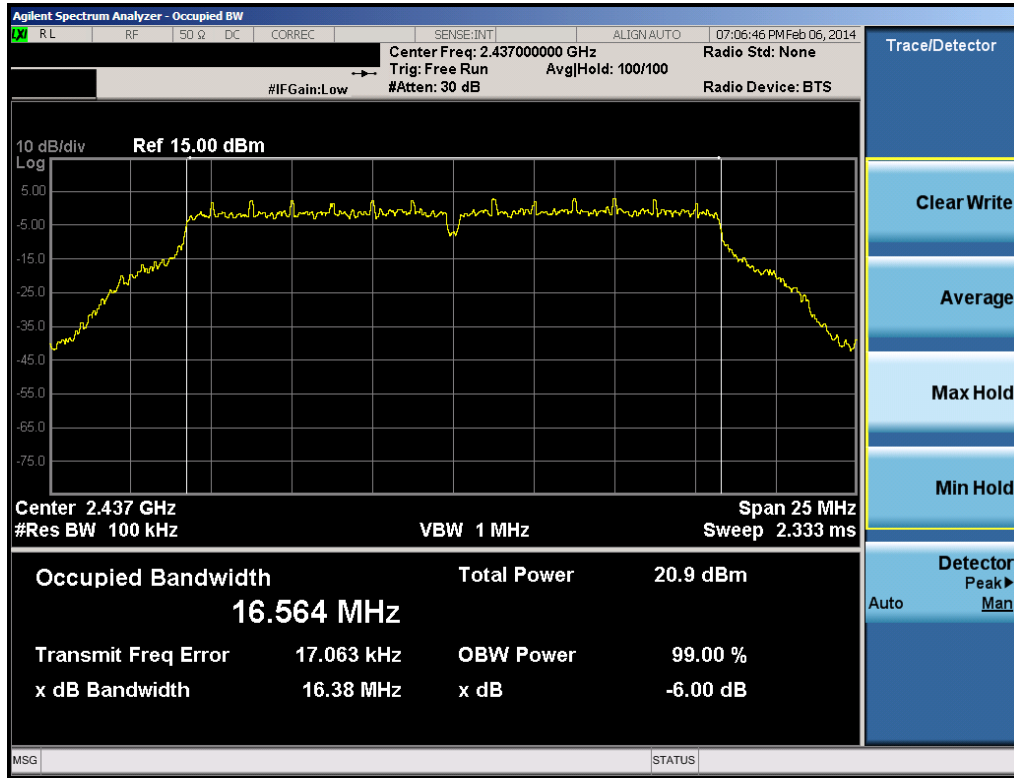


Plot 6-5. 6dB Bandwidth Plot (802.11g – Ch. 6)

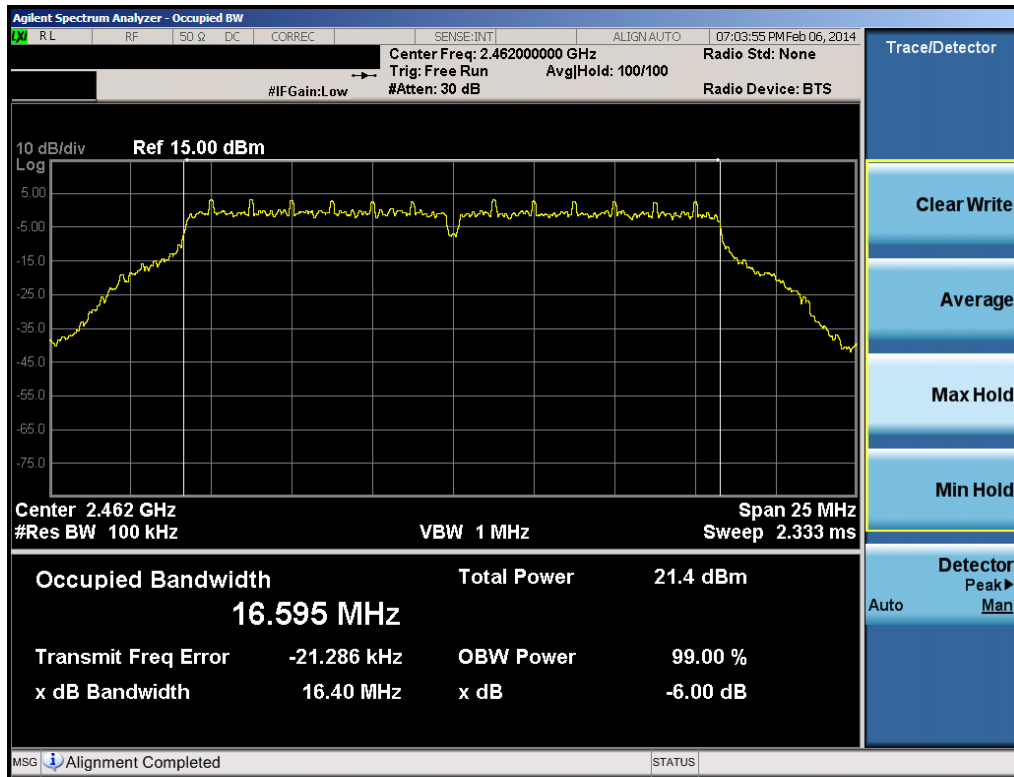


Plot 6-6. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 16 of 120

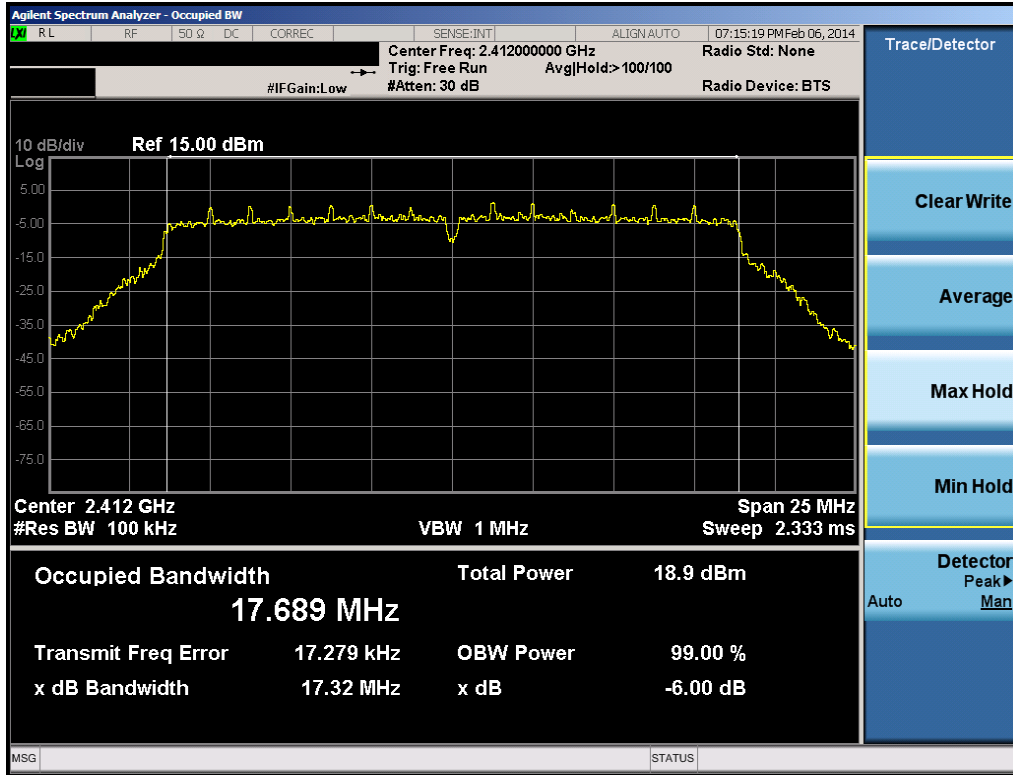


Plot 6-7. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

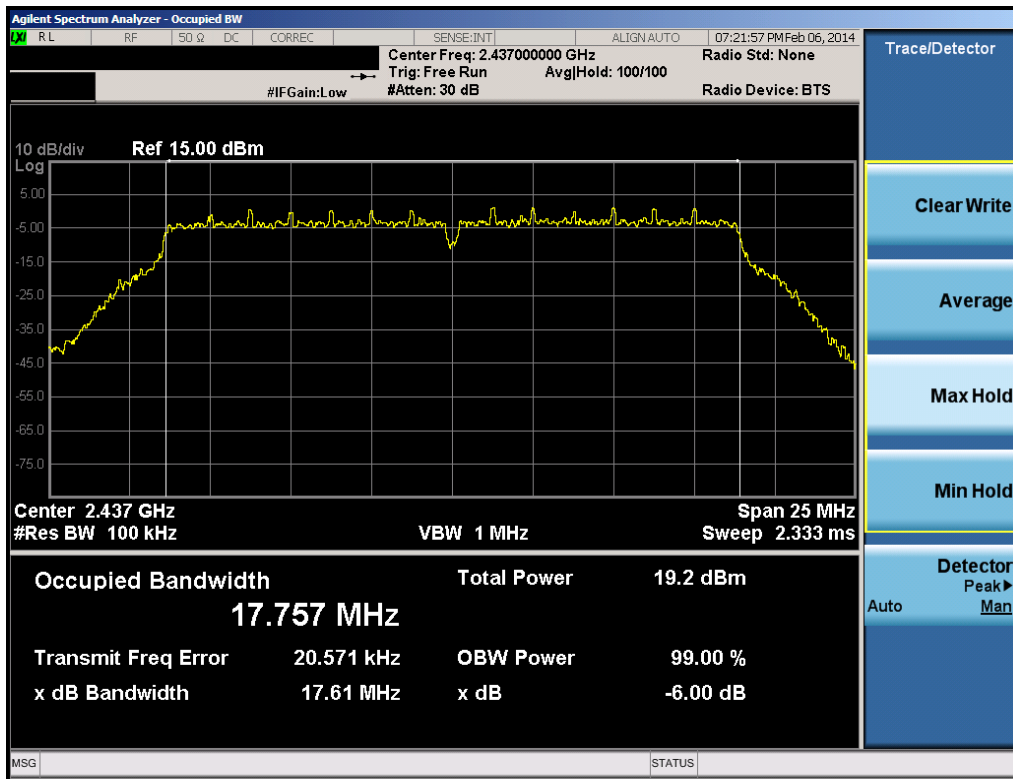


Plot 6-8. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 17 of 120

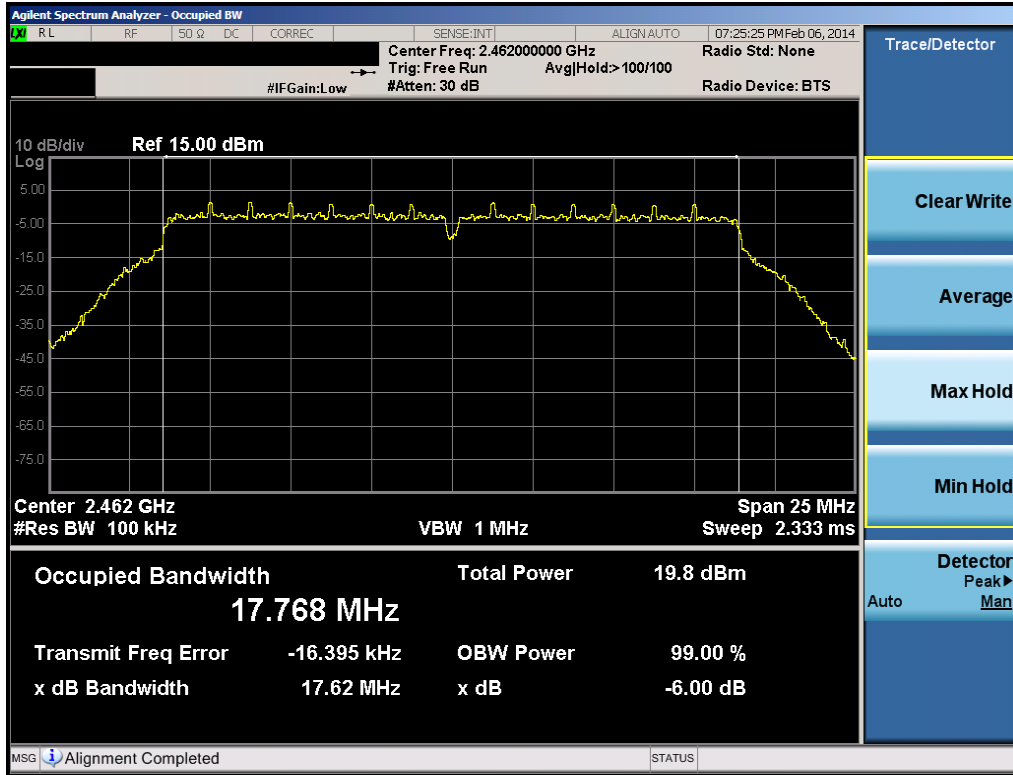


Plot 6-9. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

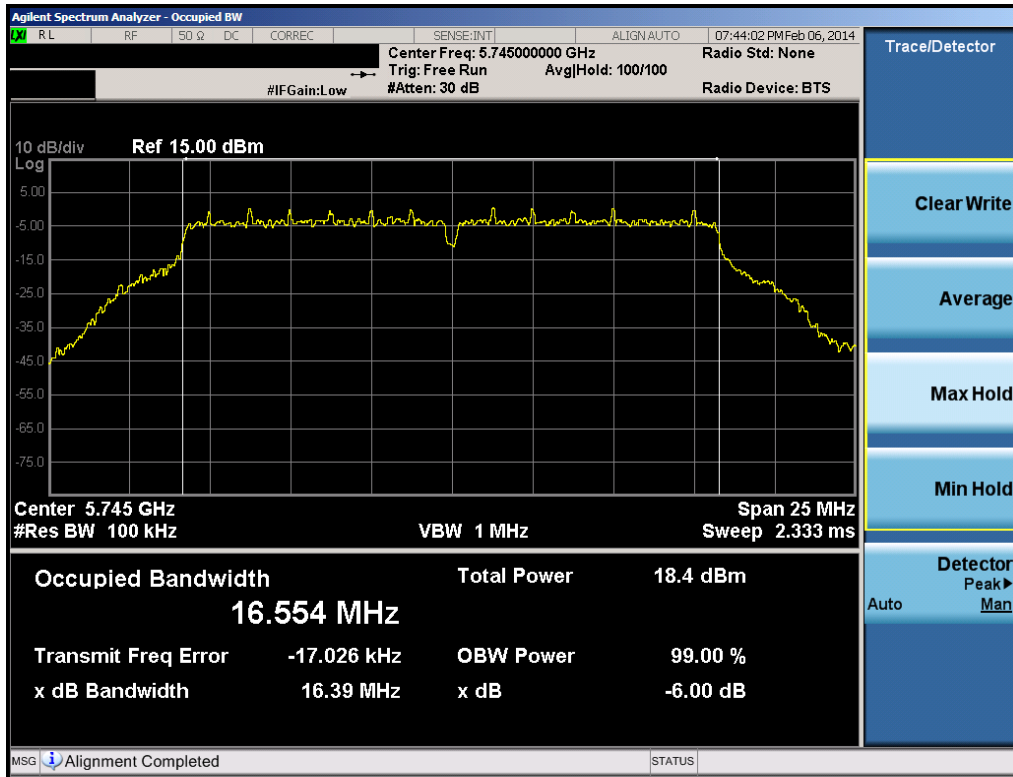


Plot 6-10. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 18 of 120

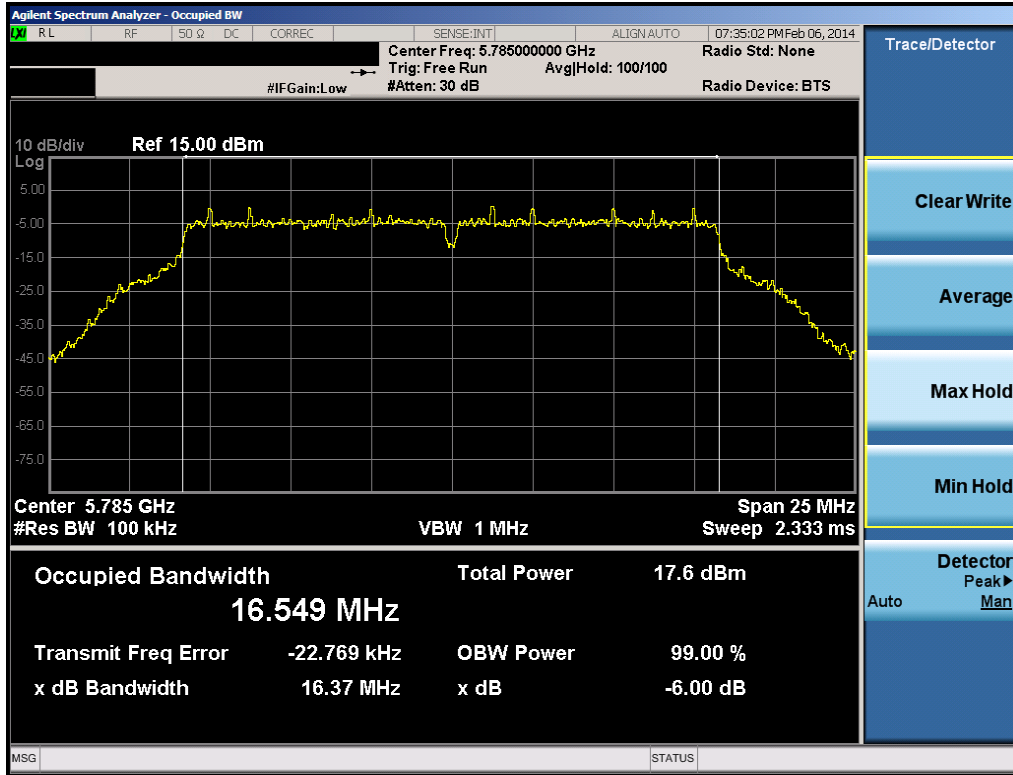


Plot 6-11. 6dB Bandwidth Plot (802.11a – Ch. 157)

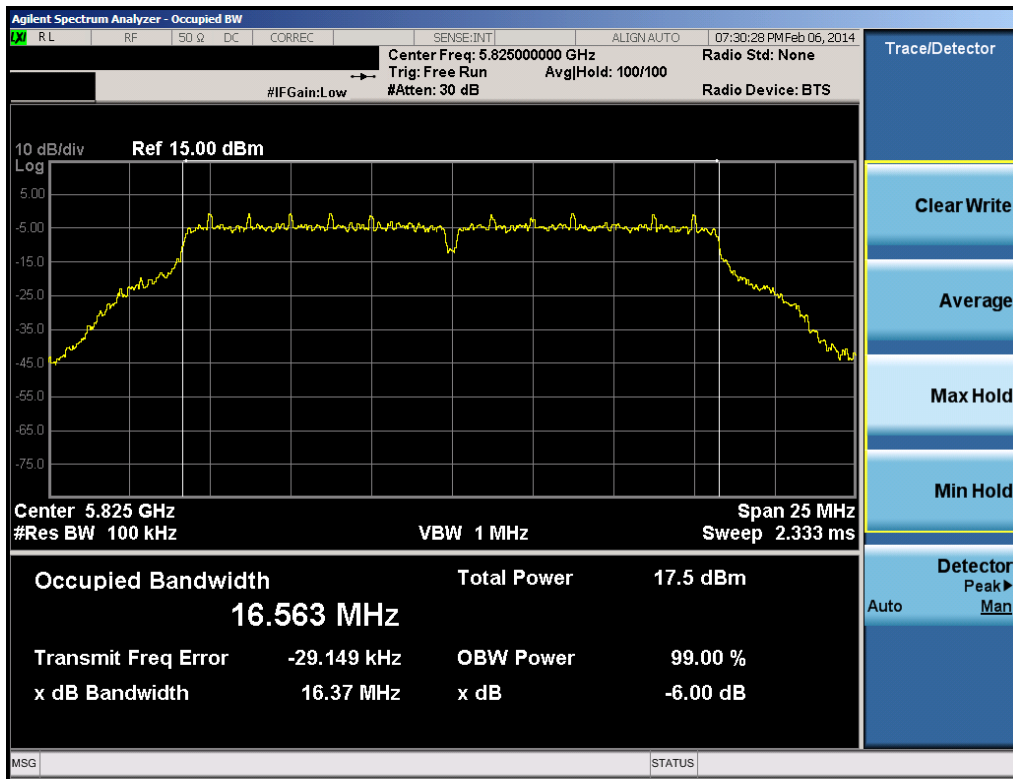


Plot 6-12. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 19 of 120

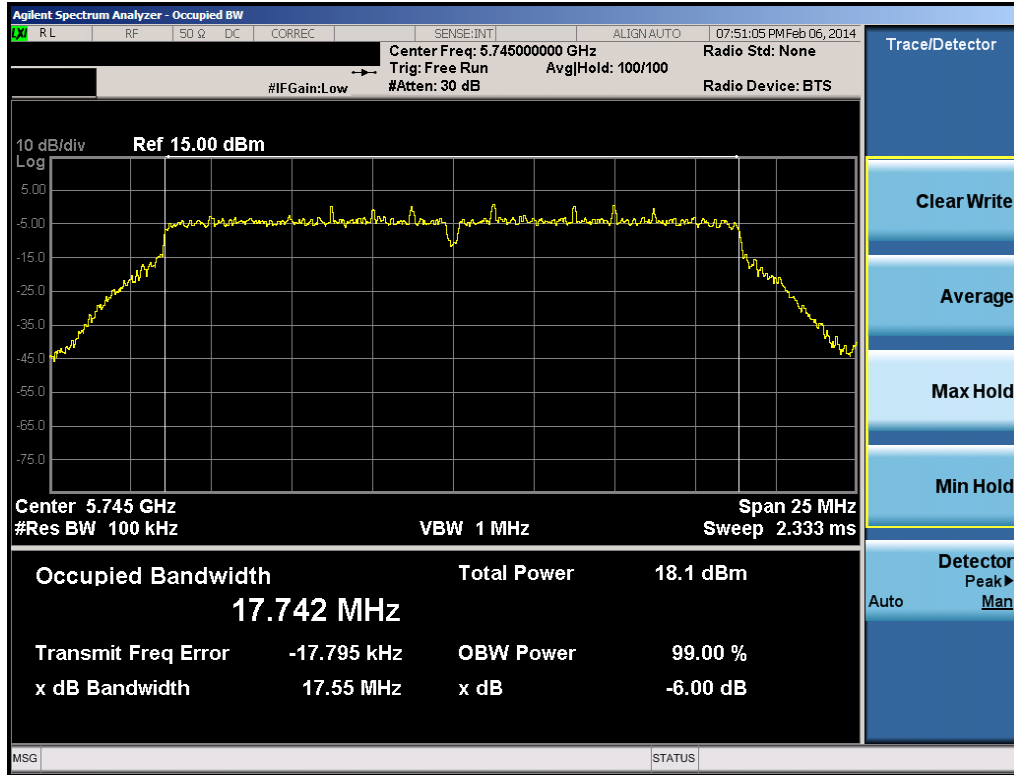


Plot 6-13. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

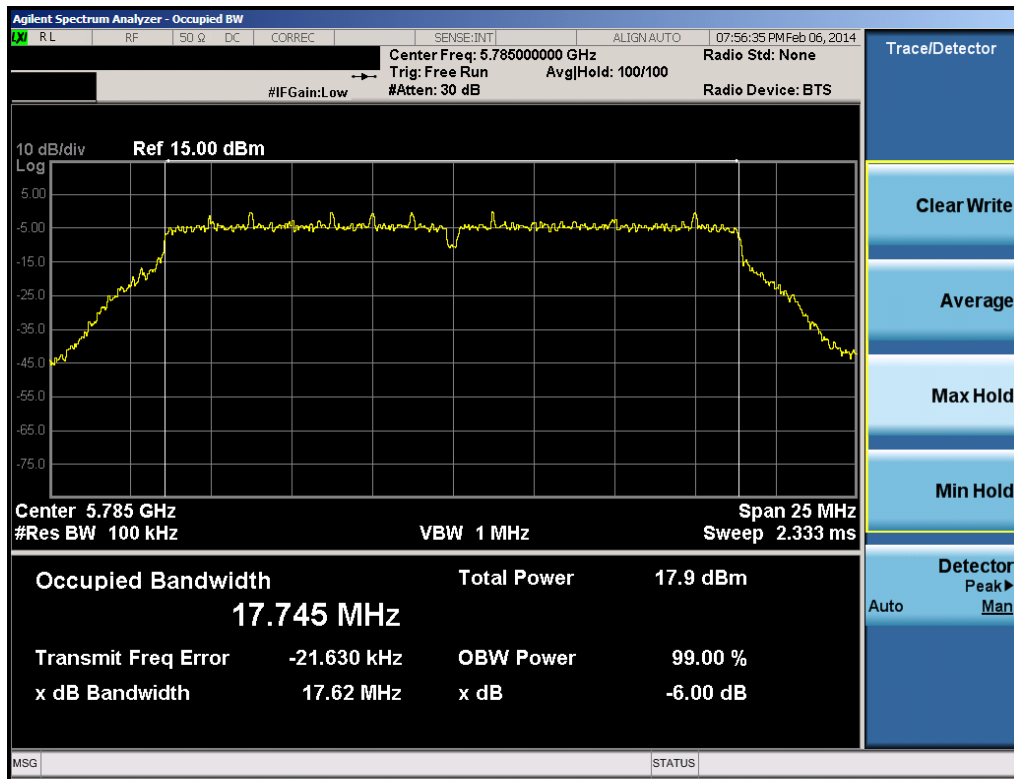


Plot 6-14. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMG900S	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 20 of 120

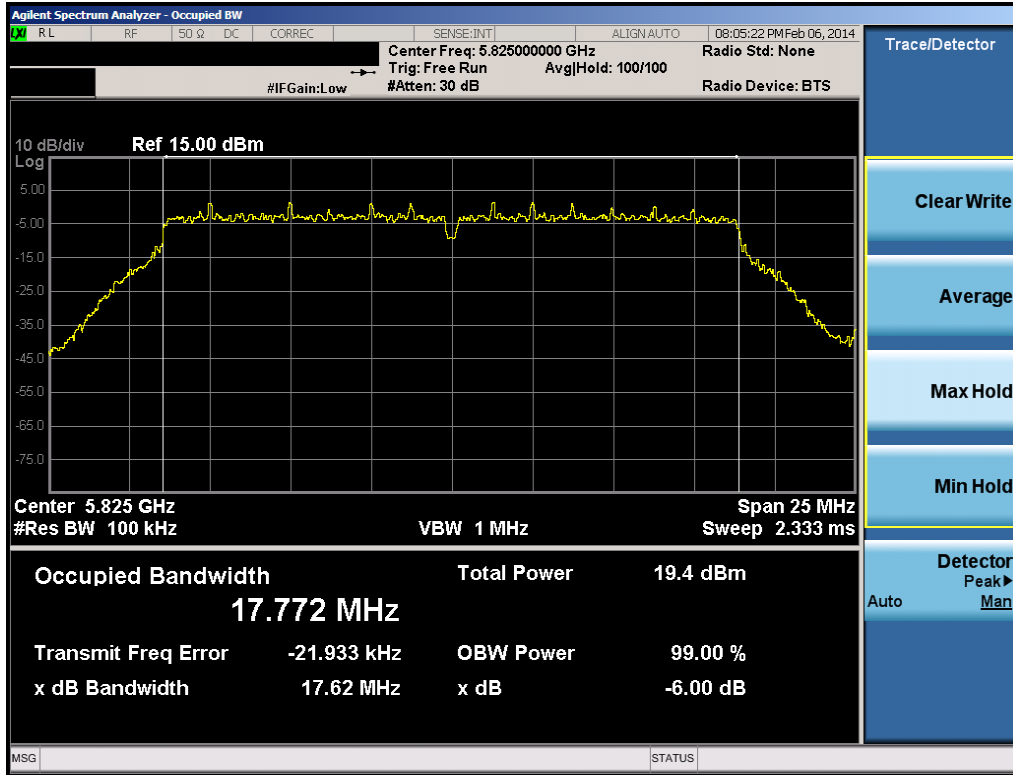


Plot 6-15. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

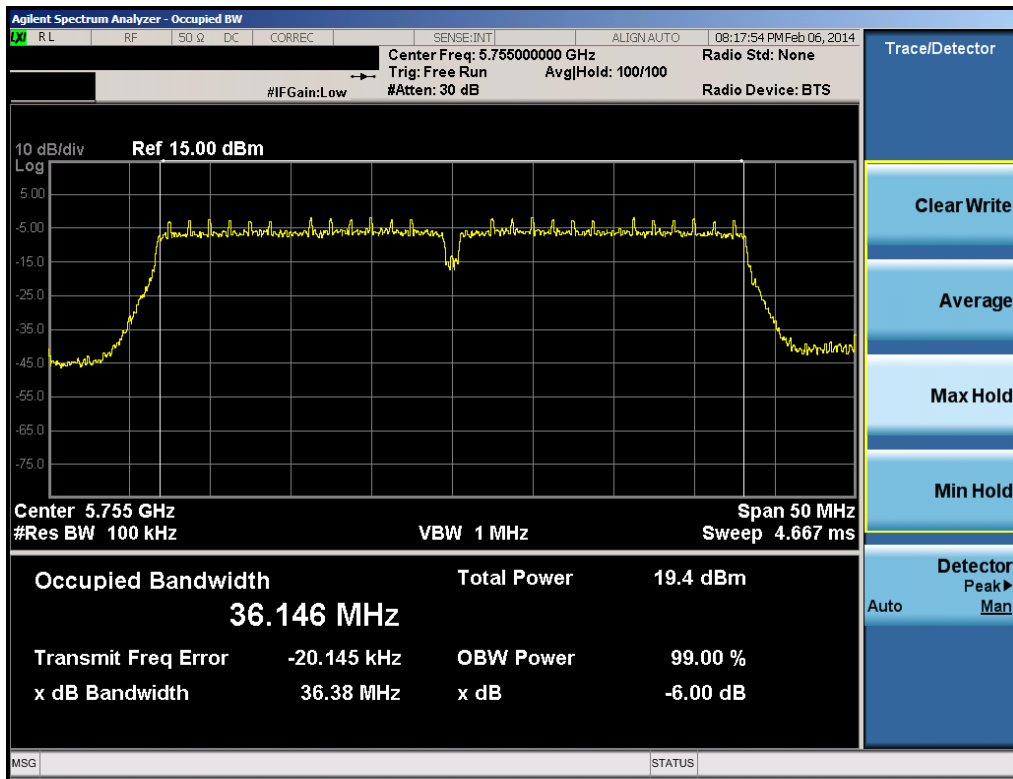


Plot 6-16. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 21 of 120

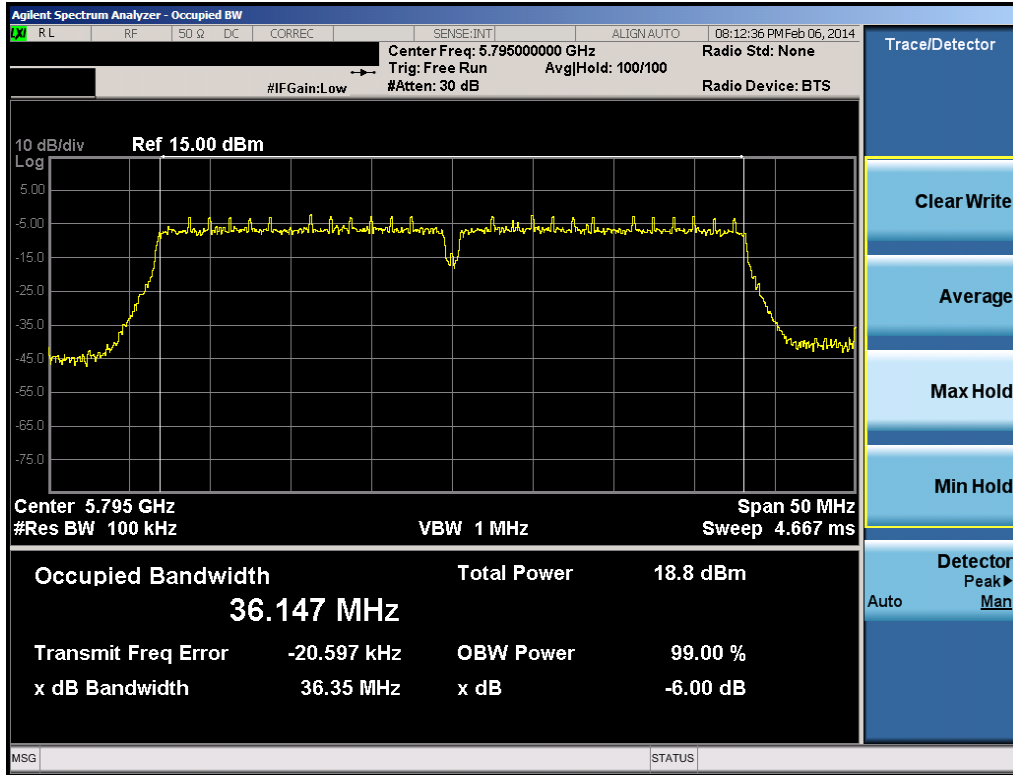

Plot 6-17. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

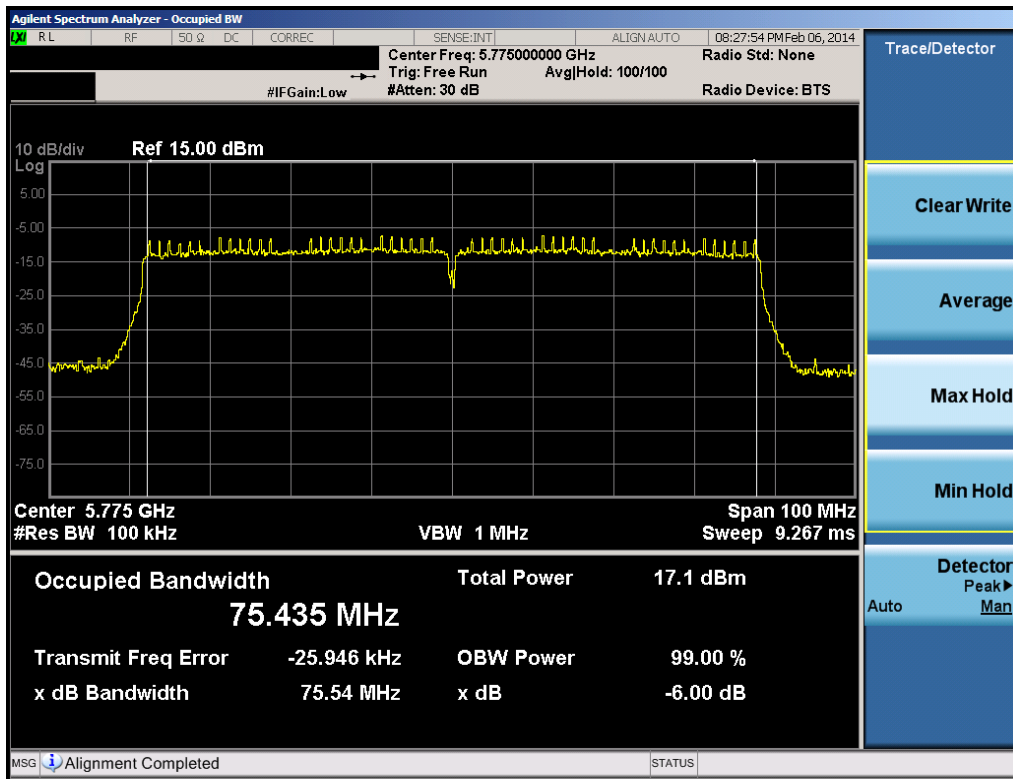



Plot 6-18. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 22 of 120

## Antenna-2 6 dB Bandwidth Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Bandwidth [MHz]	Minimum Bandwidth [MHz]	Pass / Fail
2412	1	b	1	9.034	0.500	Pass
2437	6	b	1	9.091	0.500	Pass
2462	11	b	1	9.074	0.500	Pass
2412	1	g	6	16.09	0.500	Pass
2437	6	g	6	16.43	0.500	Pass
2462	11	g	6	16.37	0.500	Pass
2412	1	n	6.5/7.2 (MCS0)	17.32	0.500	Pass
2437	6	n	6.5/7.2 (MCS0)	17.61	0.500	Pass
2462	11	n	6.5/7.2 (MCS0)	17.62	0.500	Pass
5745	149	a	6	16.34	0.500	Pass
5785	157	a	6	16.40	0.500	Pass
5825	165	a	6	16.38	0.500	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	17.59	0.500	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	17.62	0.500	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	17.60	0.500	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	36.34	0.500	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	36.35	0.500	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	75.54	0.500	Pass

**Table 6-3. Conducted Bandwidth Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 23 of 120	

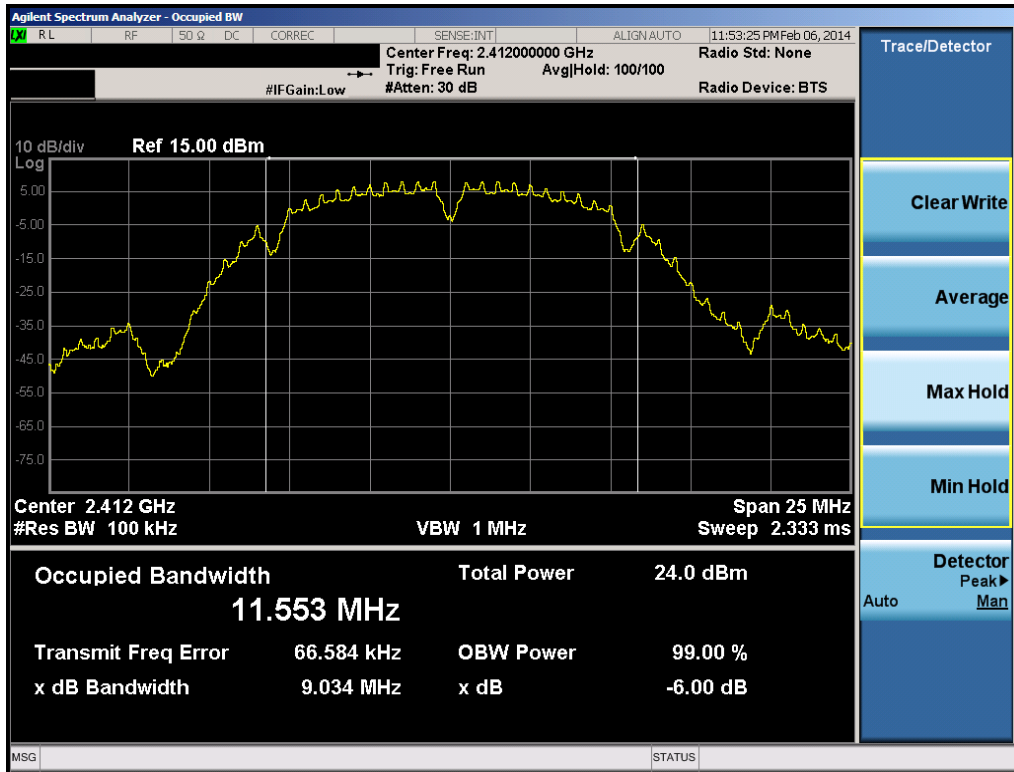


Plot 6-19. 6dB Bandwidth Plot (802.11b – Ch. 1)

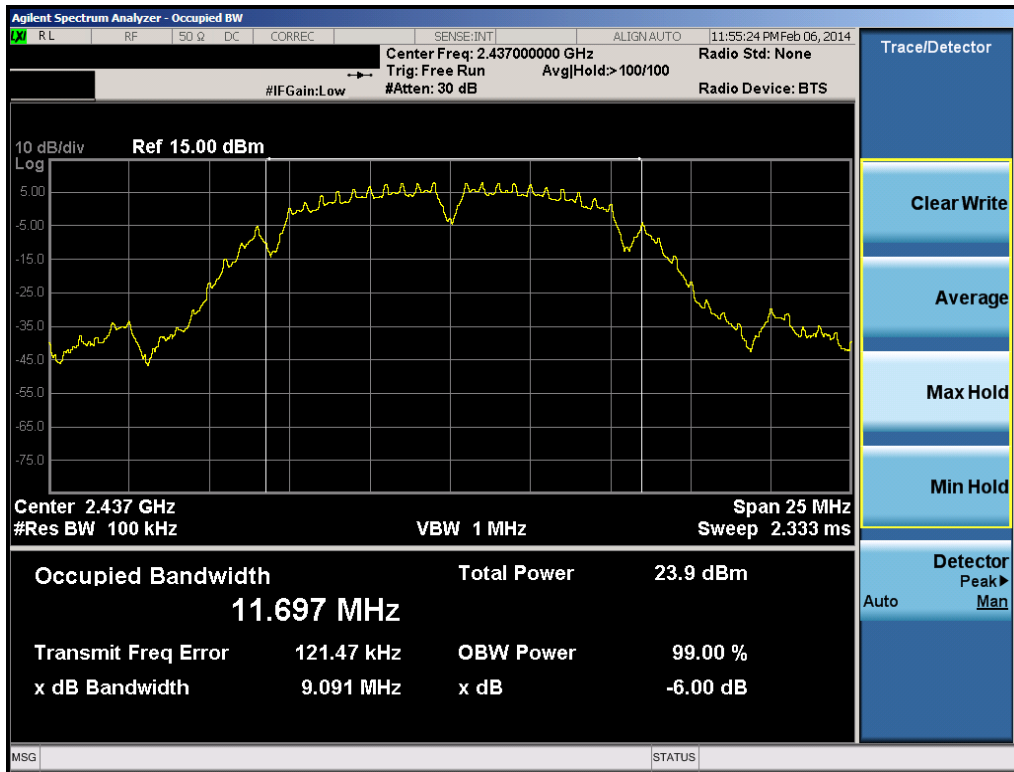


Plot 6-20. 6dB Bandwidth Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 24 of 120

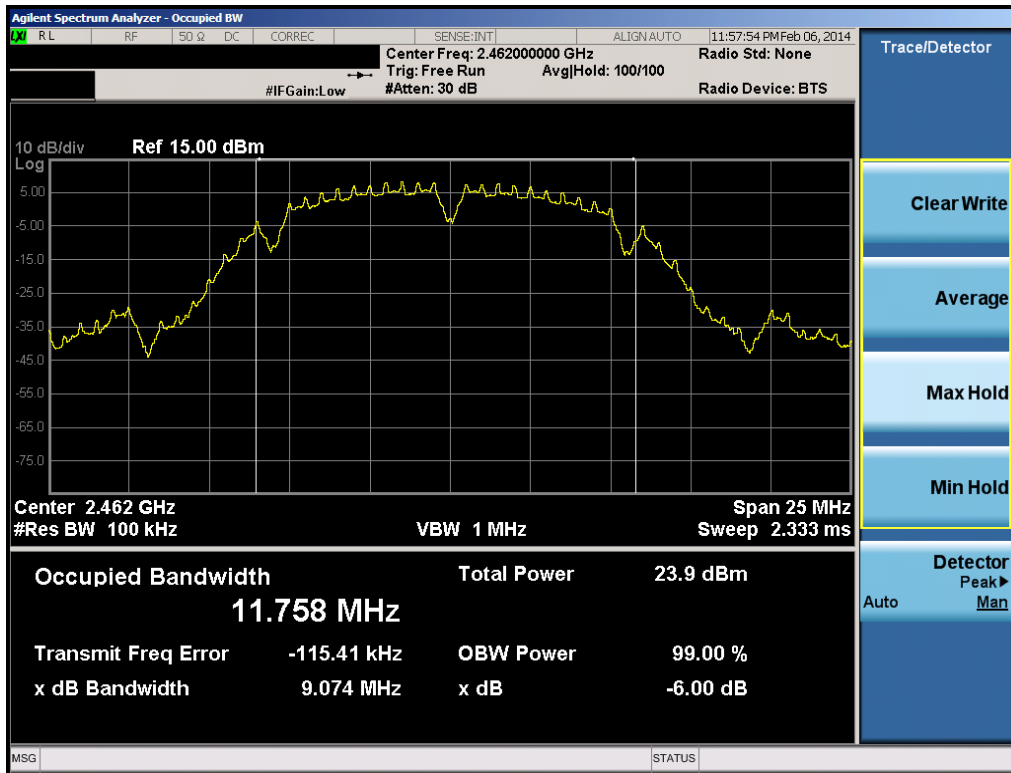


Plot 6-21. 6dB Bandwidth Plot (802.11b – Ch. 11)

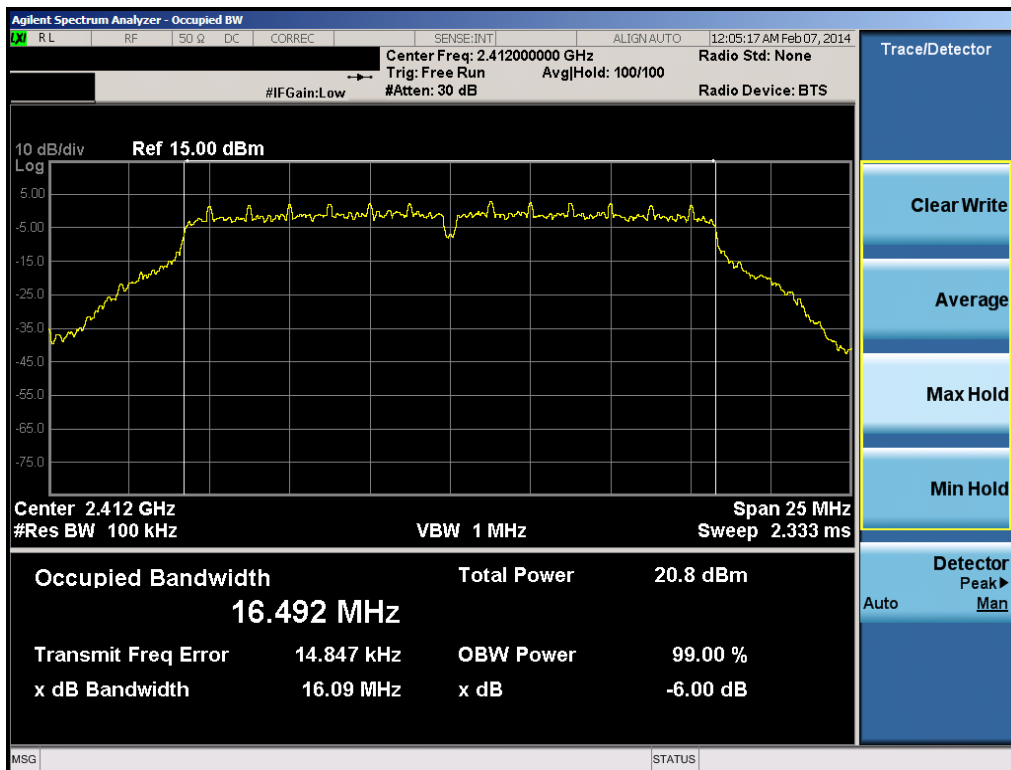


Plot 6-22. 6dB Bandwidth Plot (802.11g – Ch. 1)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 25 of 120

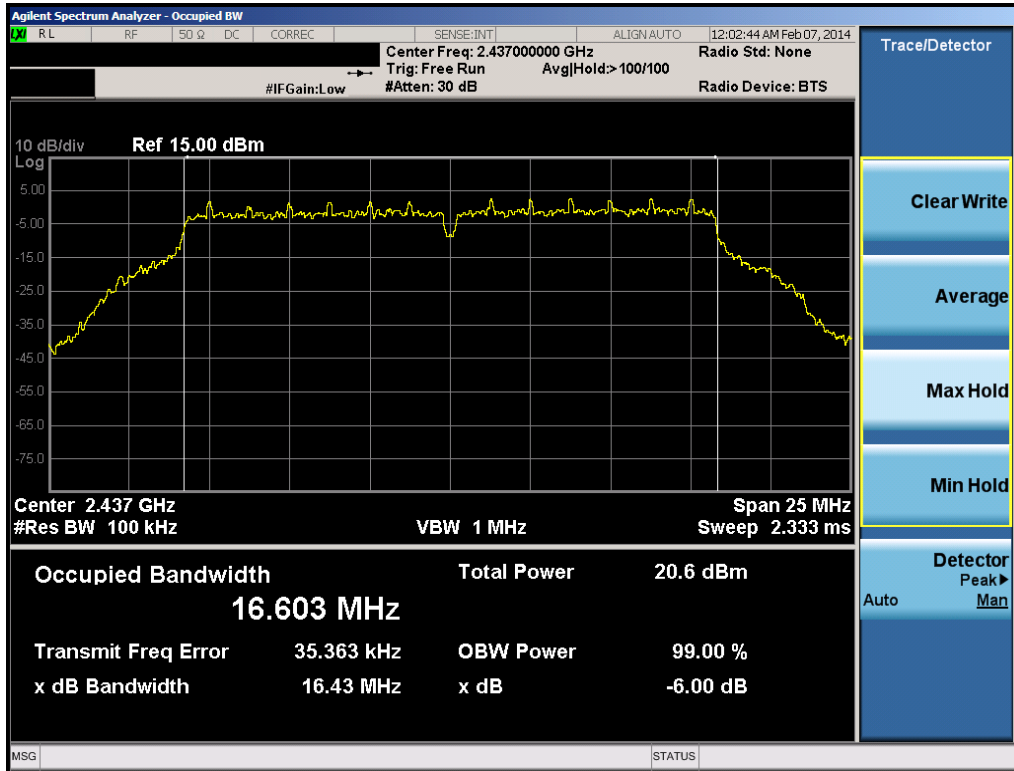


Plot 6-23. 6dB Bandwidth Plot (802.11g – Ch. 6)

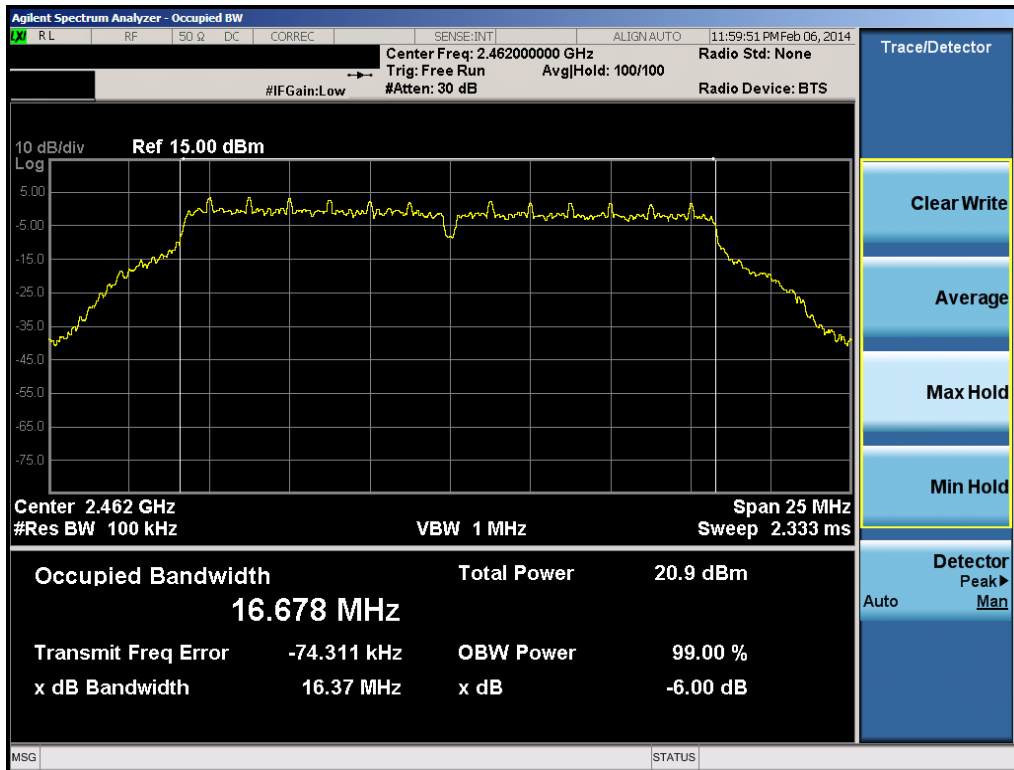


Plot 6-24. 6dB Bandwidth Plot (802.11g – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 26 of 120

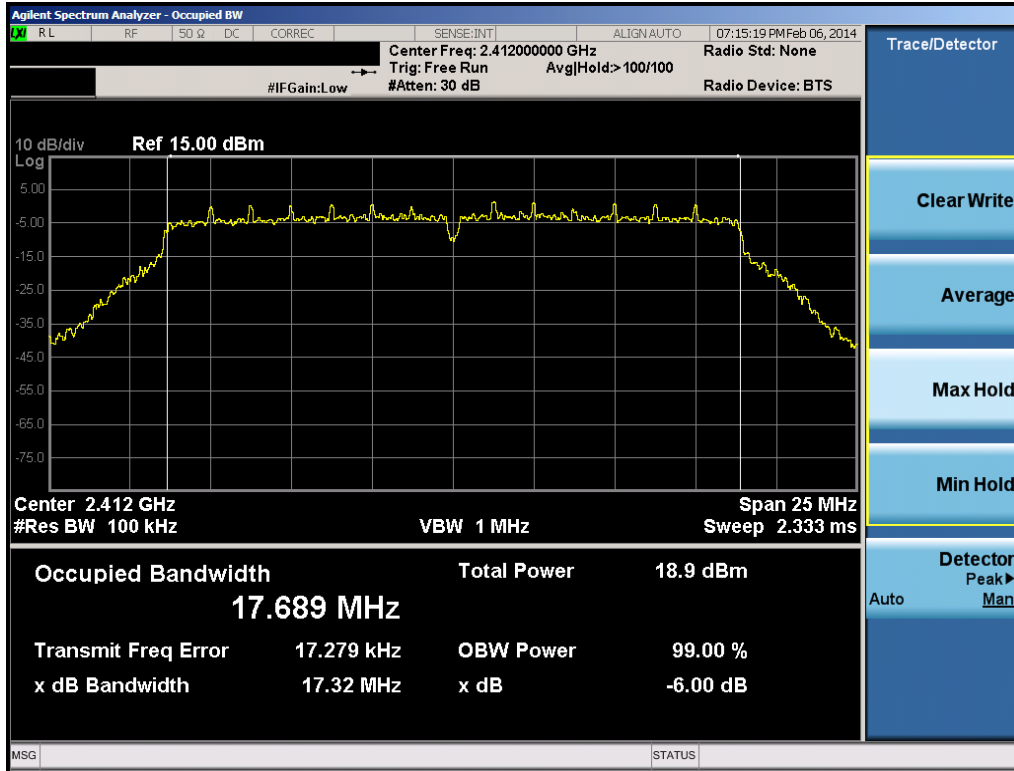


Plot 6-25. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 1)

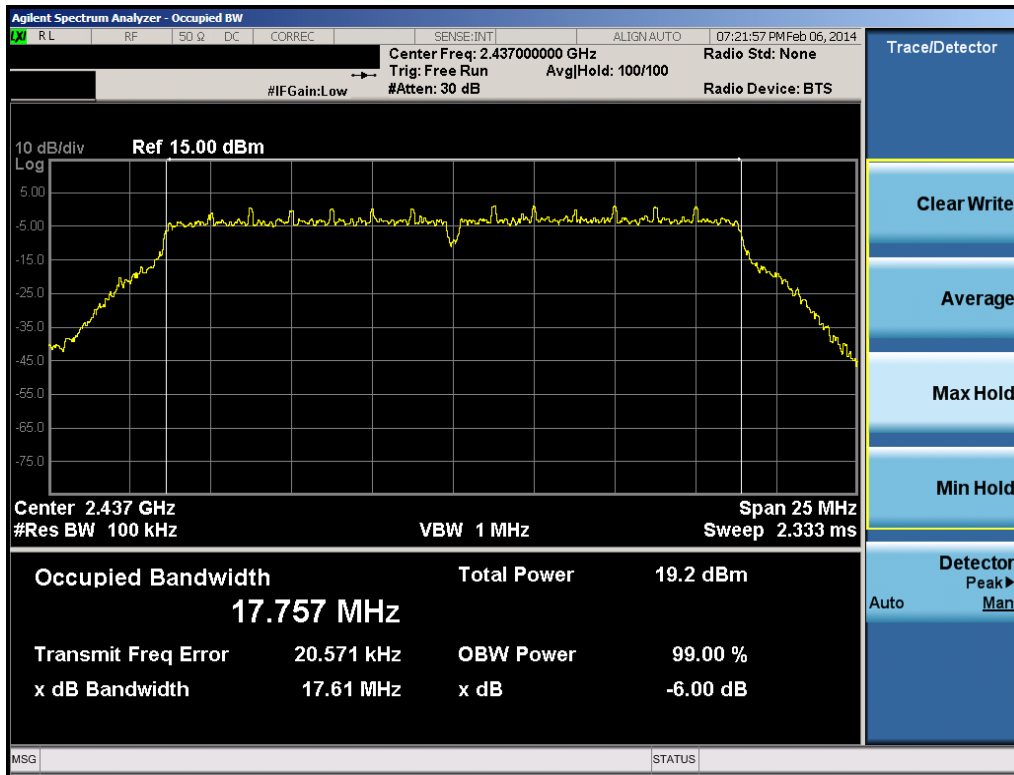


Plot 6-26. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 27 of 120

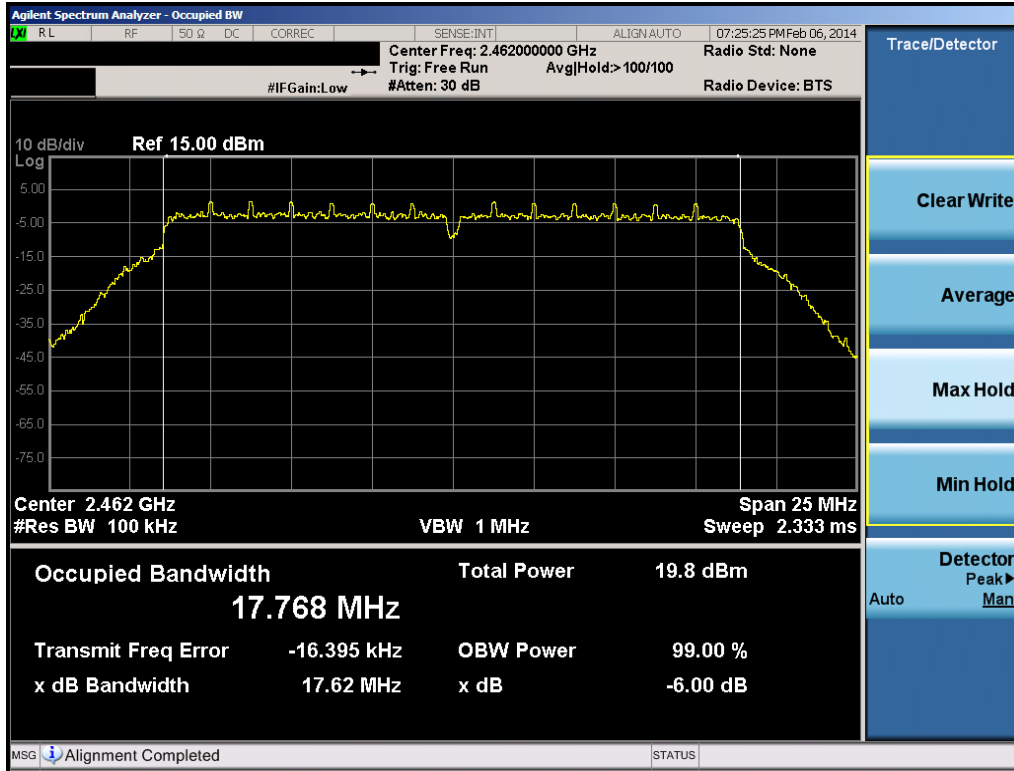


Plot 6-27. 6dB Bandwidth Plot (802.11n (2.4GHz) – Ch. 11)

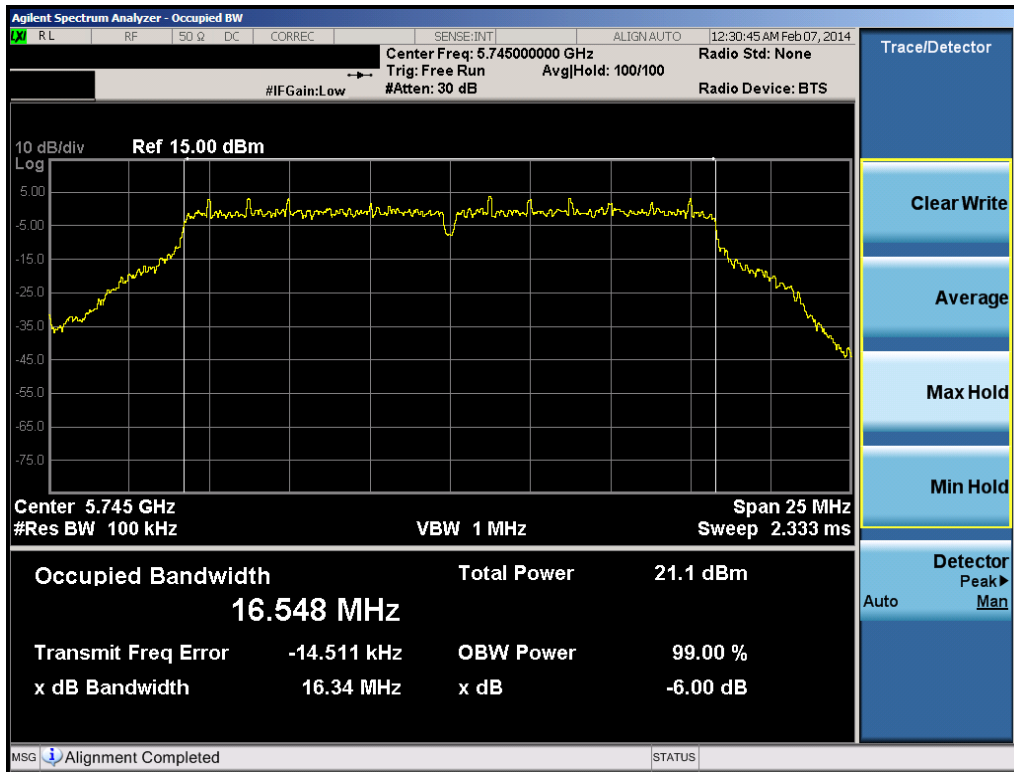


Plot 6-28. 6dB Bandwidth Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 28 of 120

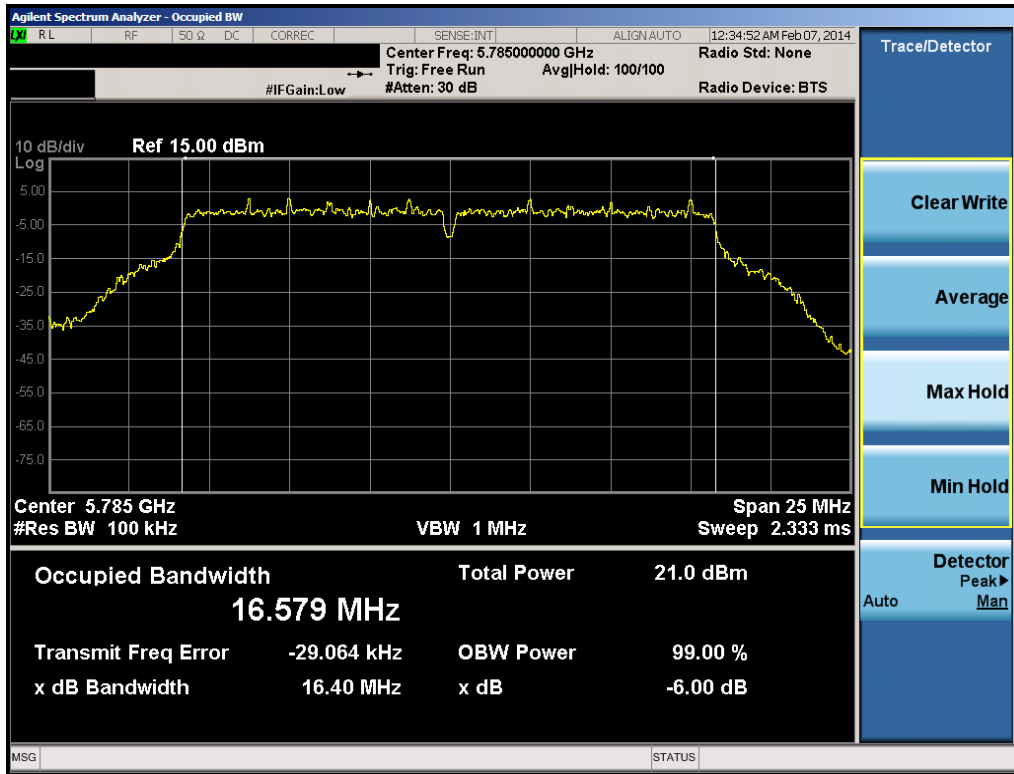


Plot 6-29. 6dB Bandwidth Plot (802.11a – Ch. 157)

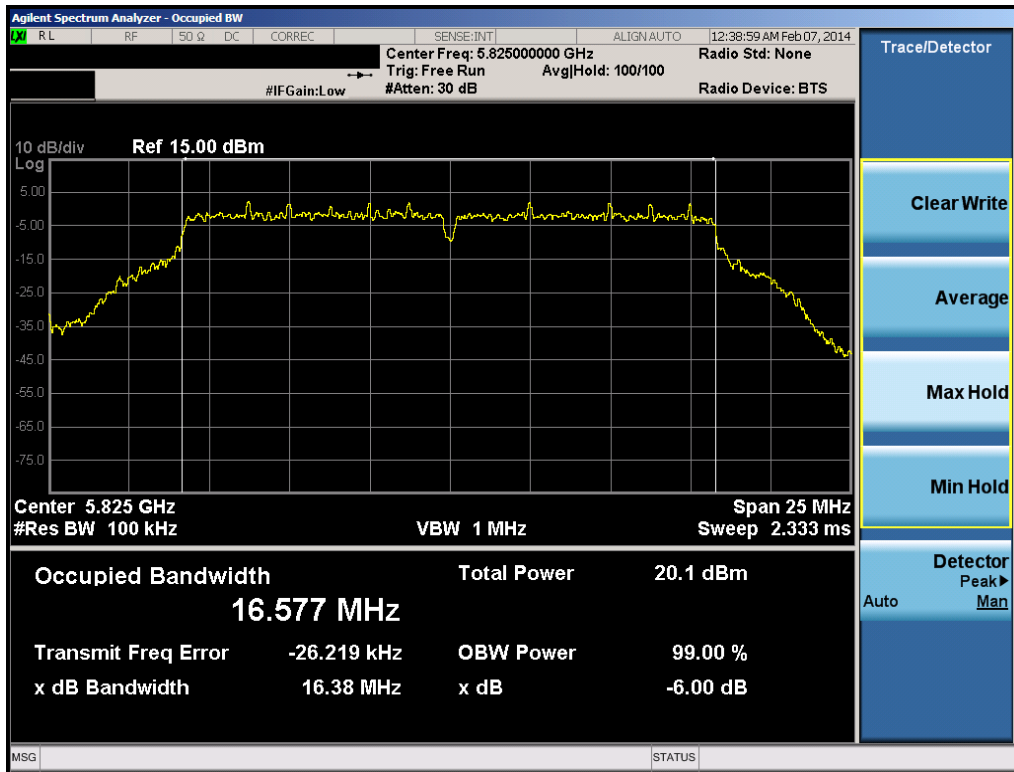


Plot 6-30. 6dB Bandwidth Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 29 of 120

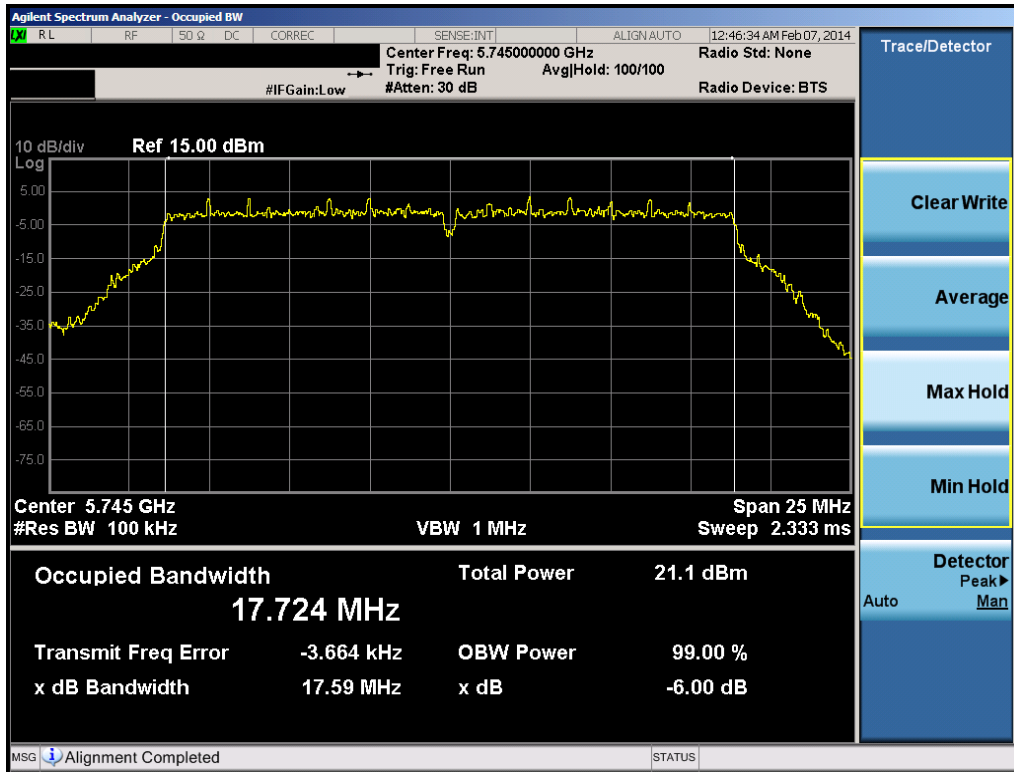


Plot 6-31. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

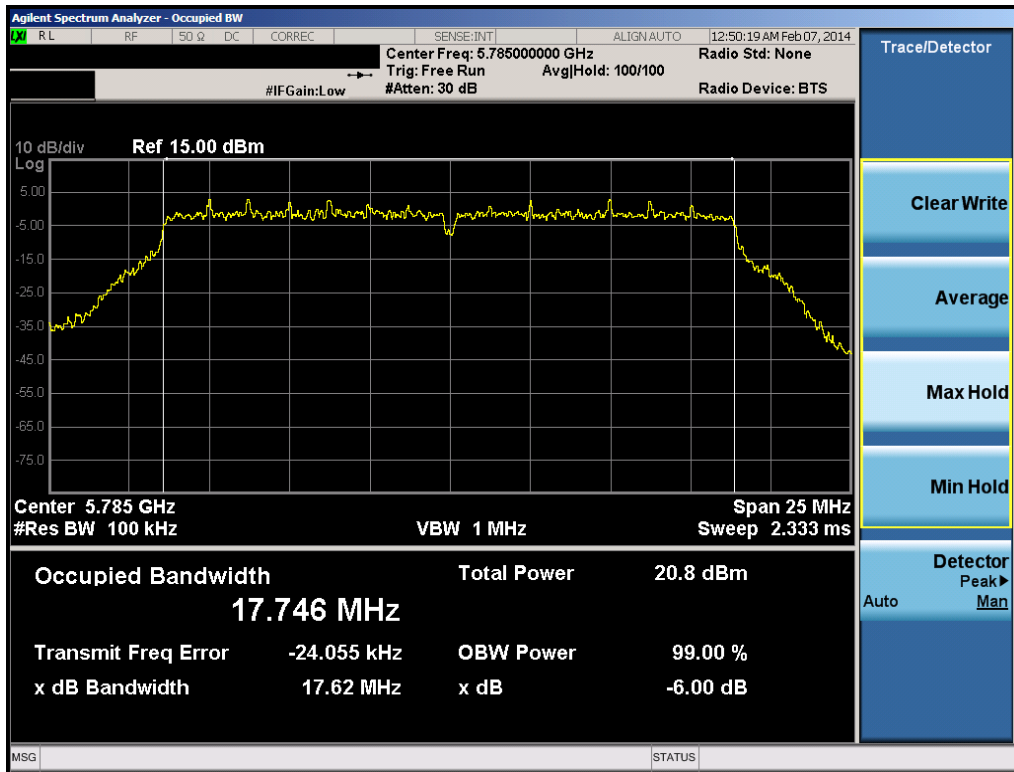


Plot 6-32. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 30 of 120

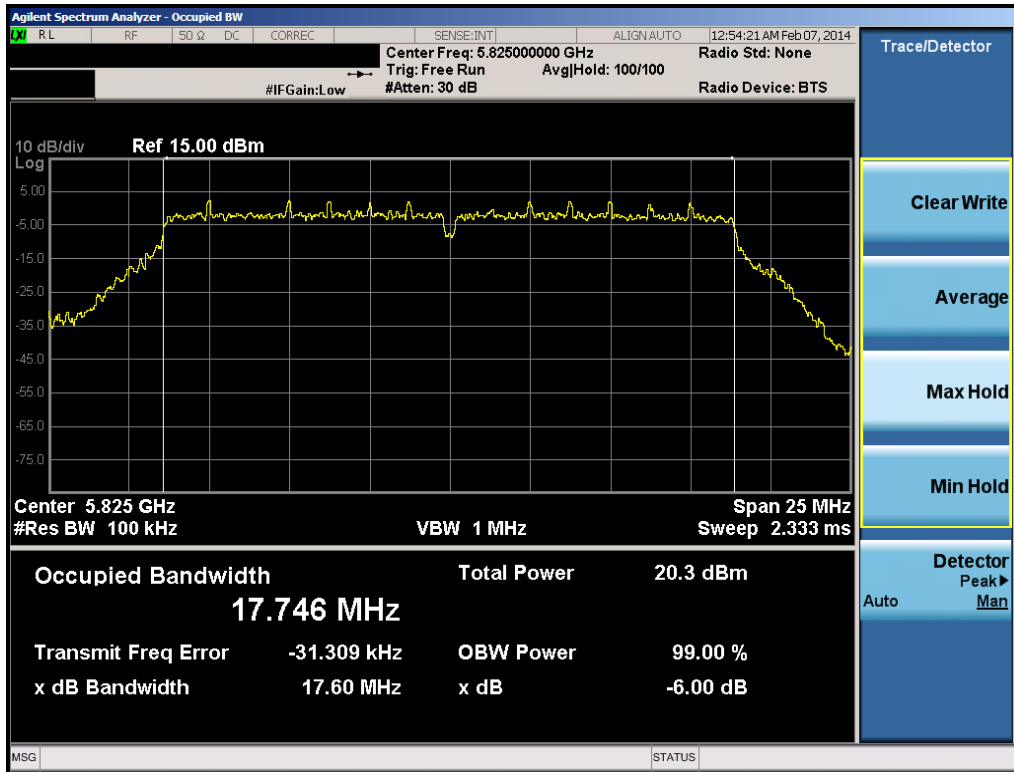


Plot 6-33. 6dB Bandwidth Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

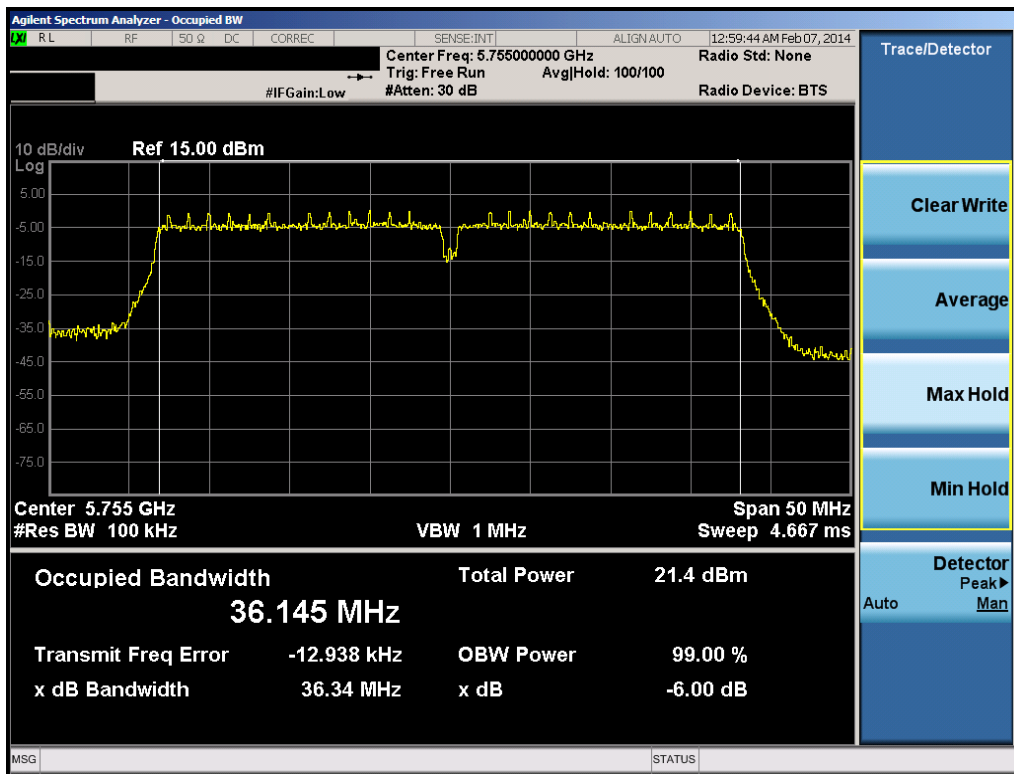


Plot 6-34. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 31 of 120

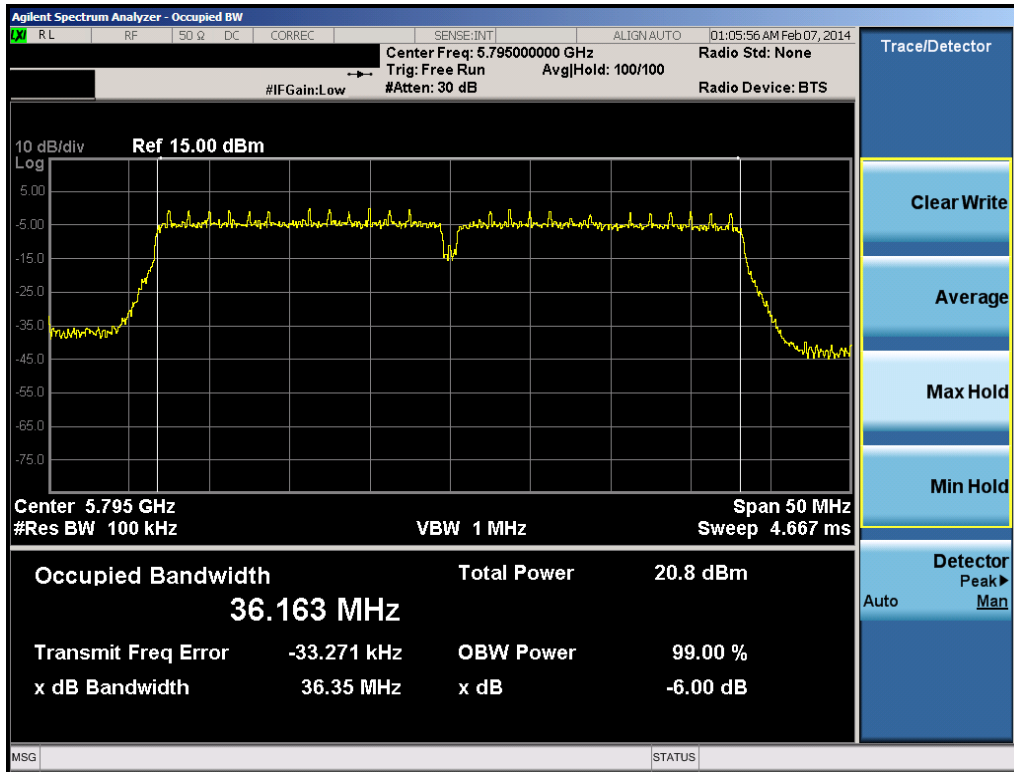

Plot 6-35. 6dB Bandwidth Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

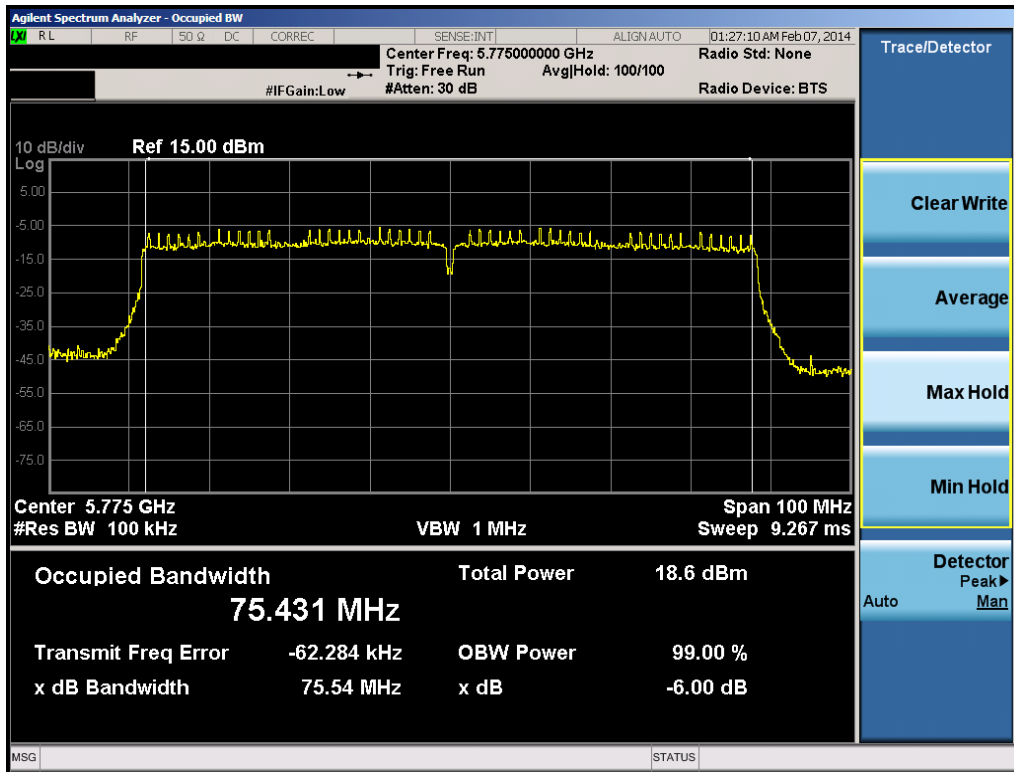

Plot 6-36. 6dB Bandwidth Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 32 of 120

### 6.3 Output Power Measurement – 802.11b/g/n (2.4GHz)

§15.247(b)(3); RSS-210 [A8.4]

#### Test Overview and Limits

A transmitter antenna terminal of EUT is connected to the input of an RF power sensor. Measurement is made using a broadband power meter capable of making peak and average measurements while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies.

*The maximum permissible conducted output power is 1 Watt.*

#### Test Procedure Used

KDB 558074 v03r01 – Section 9.1.3 PKPM1 Peak Power Method (for signals with BW ≤ 50MHz)

KDB 558074 v03r01 – Section 9.1.2 Integrated Band Power Method (for signals with BW > 50MHz)

KDB 558074 v03r01 – Section 9.2.3.2 Method AVGPM-G (for signals of all BWs)

#### Test Settings

##### Method PKPM1 (Peak Power Measurement of Signals with DTS BW ≤ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.



##### Integrated Band Power Method (Peak Power Measurement of Signals with DTS BW > 50MHz)

Since the RF power meter used only implemented a VBW of 50MHz, a signal analyzer was required to perform power measurements for signals' whose bandwidth were > 50MHz. The following settings shown in the next two sub-sections were used on a signal analyzer:

1. The signal analyzers' channel power measurement function was enabled with the integration bandwidth set to the measured DTS bandwidth
2. RBW = 1MHz
3. VBW ≥ 3 x RBW
4. Span ≥ 1.5 x DTS BW
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to fully stabilize


##### Method AVGPM-G (Average Power Measurements for Signals With Any Channel BW)

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 33 of 120	

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagrams below.



**Figure 6-2. Test Instrument & Measurement Setup for Power Meter Measurements**



**Figure 6-3. Test Instrument & Measurement Setup for Signal Analyzer Measurements**

**Test Notes**



Per KDB 662911 the individual spectra were summed mathematically in linear power units for MIMO measurements. The following MIMO powers in Tables 6-22 to 6-33 are determined by summing the maximum power in linear terms from each antenna while transmitting in MIMO mode. The powers indicated in Tables 6-4 to 6-12 for antenna port 1 and Tables 6-13 to 6-21 for antenna port 2 are transmitting at maximum power levels individually while the powers used in the Tables 6-22 to 6-33 are the maximum powers measured for the combined value of each antenna port while transmitting in MIMO.

**Sample MIMO Calculation:**

The average conducted output power for MIMO was measured to be 9.25dBm for Antenna-1 and 9.15 dBm for Antenna-2. The following MIMO powers are determined by summing the maximum power in linear terms from each antenna while transmitting in MIMO mode. The powers indicated in the following tables for antenna port 1 and 2 are transmitting at maximum power levels individually while the powers used in the following table are the maximum powers measured for each antenna port while transmitting in MIMO.

$$\text{Antenna 1} + \text{Antenna 2} = \text{MIMO}$$

$$(9.25\text{dBm} + 9.15\text{dBm}) = (8.42\text{mW} + 8.22\text{mW}) = 16.64\text{mW} = 12.21\text{dBm}$$

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 34 of 120	

**Antenna-1 Output Power Measurement – 802.11b/g/n (2.4GHz)**  
 §15.247(b)(3); RSS-210 [A8.4]

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	16.65	16.85	16.90	16.93
			19.61	19.97	19.85	19.87
802.11b	2437	6*	16.75	16.89	16.74	16.90
			20.11	20.12	20.33	20.15
802.11b	2462	11*	16.76	16.45	16.88	16.93
			19.90	19.73	19.91	20.10



**Table 6-4. 802.11b Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	13.71	13.99	14.05	13.97	14.17	13.99	14.20	13.91
			PEAK	19.56	19.81	19.84	19.87	21.10	21.47	21.13	21.07
802.11g	2437	6	AVG	13.87	14.35	13.87	13.43	13.59	14.01	13.82	13.53
			PEAK	19.65	19.96	19.72	19.75	19.23	19.73	19.89	19.37
802.11g	2462	11	AVG	13.90	13.83	14.05	14.06	14.17	13.74	13.58	14.14
			PEAK	19.74	19.61	20.09	19.44	20.15	19.55	19.74	19.36

**Table 6-5. 802.11g Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	2412	1	AVG	11.43	11.46	11.72	12.02	12.05	12.09	12.05	12.09
			PEAK	17.78	17.71	17.90	20.41	20.27	19.98	12.04	20.39
802.11n	2437	6	AVG	11.84	12.29	12.43	12.35	11.26	11.88	11.91	11.84
			PEAK	17.95	17.33	17.69	17.61	18.33	17.68	18.50	18.47
802.11n	2462	11	AVG	11.99	11.42	12.39	11.51	11.34	11.64	12.12	12.25
			PEAK	18.05	17.94	18.06	18.08	17.57	18.27	17.74	18.31

**Table 6-6. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 35 of 120

**Antenna-1 Output Power Measurement – 802.11a/n/ac (5GHz)**  
**§15.247(b)(3); RSS-210 [A8.4]**

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	11.84	11.88	11.98	11.64	12.07	12.06	11.61	12.06
			PEAK	17.67	17.92	17.56	17.76	17.85	17.53	17.44	17.45
802.11a	5765	153	AVG	11.85	11.84	11.83	12.01	11.67	11.98	12.07	11.98
			PEAK	17.76	17.63	17.53	17.64	17.53	17.85	17.79	18.02
802.11a	5785	157	AVG	11.90	11.88	12.14	12.11	12.01	11.99	11.83	11.82
			PEAK	17.72	17.92	17.88	17.95	17.55	17.45	17.59	17.59
802.11a	5805	161	AVG	11.79	11.73	12.01	12.00	11.57	12.05	11.74	11.98
			PEAK	17.58	17.73	17.39	17.38	17.48	17.71	17.54	17.33
802.11a	5825	165	AVG	11.76	11.88	11.88	11.86	11.62	11.91	11.93	11.76
			PEAK	17.56	17.51	17.42	17.63	17.54	17.65	17.35	17.36



**Table 6-7. 802.11a Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5745	149	AVG	11.92	12.11	12.03	11.91	12.13	11.93	11.99	12.14
			PEAK	17.76	17.96	17.35	17.59	17.96	18.17	17.93	17.78
802.11n	5765	153	AVG	11.63	11.70	11.20	11.92	11.90	11.52	11.55	11.38
			PEAK	17.83	17.58	18.24	18.21	17.98	18.25	17.44	17.53
802.11n	5785	157	AVG	11.76	11.50	11.92	11.83	12.12	11.48	12.14	12.09
			PEAK	17.60	17.66	17.31	17.41	17.39	17.45	17.39	17.77
802.11n	5805	161	AVG	11.77	11.94	12.14	11.62	11.82	11.96	12.07	12.11
			PEAK	17.56	17.87	17.27	17.53	17.66	17.20	17.60	17.14
802.11n	5825	165	AVG	11.49	11.23	11.18	11.32	11.72	11.54	11.55	11.32
			PEAK	17.51	17.39	17.60	17.67	17.32	17.13	17.45	17.21

**Table 6-8. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5755	151	AVG	11.45	11.25	11.08	11.50	11.39	11.20	11.13	11.79
			PEAK	17.32	17.31	17.53	17.58	17.50	17.50	17.68	17.50
802.11n	5795	159	AVG	11.52	11.30	11.69	11.52	11.86	11.17	11.22	11.82
			PEAK	17.33	17.53	17.56	17.68	17.06	17.66	16.96	17.28

**Table 6-9. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 36 of 120

**Antenna-1 Output Power Measurement – 802.11a/n/ac (5GHz)**  
**§15.247(b)(3); RSS-210 [A8.4]**

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	10.14
			PEAK	15.44
802.11ac	5785	157	AVG	9.96
			PEAK	15.17
802.11ac	5825	165	AVG	9.88
			PEAK	15.11



**Table 6-10. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	10.24
			PEAK	16.10
802.11ac	5795	159	AVG	10.33
			PEAK	16.02

**Table 6-11. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3/32.5	58.5/65	87.8/97.5	117/130	175.5/195	234/260	263.3/292.5	292.5/325	351/390	390/433.3
802.11ac	5775	155	AVG	9.76	9.88	9.40	9.98	9.80	9.90	9.42	9.31	9.99	9.21
			PEAK	14.86	14.75	15.27	14.74	15.10	14.36	14.83	15.03	15.08	15.38

**Table 6-12. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 37 of 120

### Antenna-2 Output Power Measurement – 802.11b/g/n (2.4GHz)

§15.247(b)(3); RSS-210 [A8.4]

Mode	Freq [MHz]	Channel	802.11b Conducted Power [dBm]			
			Data Rate [Mbps]			
			1	2	5.5	11
802.11b	2412	1*	16.61	16.69	16.57	16.60
			19.72	19.78	19.80	19.70
802.11b	2437	6*	16.43	16.60	16.64	16.61
			19.58	19.71	19.69	19.55
802.11b	2462	11*	16.59	16.45	16.68	16.66
			19.70	19.98	19.52	19.70



**Table 6-13. 802.11b Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11g Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11g	2412	1	AVG	13.57	13.34	13.44	13.40	13.65	13.54	13.64	13.60
			PEAK	19.27	19.45	19.34	18.97	20.43	20.35	20.57	20.69
802.11g	2437	6	AVG	13.52	13.64	13.73	13.79	13.27	13.56	13.44	13.39
			PEAK	19.19	19.16	19.31	19.23	19.28	19.20	19.05	19.45
802.11g	2462	11	AVG	13.73	13.74	13.79	13.79	14.03	13.47	13.49	13.76
			PEAK	19.27	19.43	19.53	18.97	19.34	18.98	19.00	19.38

**Table 6-14. 802.11g Conducted Output Power Measurements**

Mode	Freq [MHz]	Channel	Detector	802.11n (2.4GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5	13	19.5	26	39	52	58.5	65
802.11n	2412	1	AVG	11.41	11.20	11.38	11.64	11.60	11.49	11.57	11.51
			PEAK	16.78	16.79	16.85	18.92	18.97	18.43	18.50	18.40
802.11n	2437	6	AVG	11.33	11.42	11.76	11.27	11.12	10.95	11.10	11.59
			PEAK	16.72	16.68	16.88	17.14	16.63	16.88	16.55	16.63
802.11n	2462	11	AVG	11.54	11.46	11.24	11.69	11.33	11.64	11.32	11.76
			PEAK	16.86	16.96	16.93	16.56	17.29	17.17	16.74	16.51

**Table 6-15. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 38 of 120

## Antenna-2 Output Power Measurement – 802.11a/n/ac (5GHz)

§15.247(b)(3); RSS-210 [A8.4]

Mode	Freq [MHz]	Channel	Detector	802.11a Conducted Power [dBm]							
				Data Rate [Mbps]							
				6	9	12	18	24	36	48	54
802.11a	5745	149	AVG	11.69	11.57	11.59	11.60	11.73	11.80	11.68	11.40
			PEAK	17.42	17.06	17.76	17.70	17.06	17.53	17.20	17.06
802.11a	5765	153	AVG	11.67	11.85	11.65	11.39	11.77	11.48	11.78	11.80
			PEAK	17.39	17.50	17.20	17.50	17.61	17.39	17.70	17.06
802.11a	5785	157	AVG	11.41	11.45	11.77	11.28	11.41	11.47	11.26	11.52
			PEAK	17.11	17.26	16.96	17.04	16.95	16.99	17.23	16.81
802.11a	5805	161	AVG	12.16	12.26	11.88	12.35	11.97	11.95	11.99	12.11
			PEAK	17.18	17.34	17.49	17.12	16.91	16.89	17.30	16.97
802.11a	5825	165	AVG	11.88	11.59	11.91	11.97	12.10	11.51	11.55	12.14
			PEAK	17.47	17.58	17.13	17.57	17.63	17.61	17.53	17.10

Table 6-16. 802.11a Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	20MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				6.5/7.2	13/14.4	19.5/21.7	26/28.9	39/43.4	52/57.8	58.5/65	65/72.2
802.11n	5745	149	AVG	11.61	11.39	11.69	11.57	11.54	11.68	11.51	11.46
			PEAK	16.99	16.97	17.14	16.74	16.99	17.00	16.84	17.18
802.11n	5765	153	AVG	11.51	11.85	11.55	11.62	11.16	11.58	11.49	11.52
			PEAK	16.81	17.04	16.55	17.06	17.11	16.53	16.75	16.90
802.11n	5785	157	AVG	11.31	10.98	11.19	11.13	11.26	10.99	11.38	11.59
			PEAK	16.67	16.77	16.68	16.60	17.02	16.89	16.46	16.73
802.11n	5805	161	AVG	12.09	12.18	11.98	11.74	11.78	12.34	11.94	12.03
			PEAK	17.37	17.24	17.49	17.45	17.19	17.09	17.43	17.55
802.11n	5825	165	AVG	11.85	11.58	11.64	11.94	12.16	11.71	11.77	12.11
			PEAK	17.22	17.29	17.58	17.18	17.19	16.99	17.06	17.04

Table 6-17. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	40MHz BW 802.11n (5GHz) Conducted Power [dBm]							
				Data Rate [Mbps]							
				13.5/15	27/30	40.5/45	54/60	81/90	108/120	121.5/135	135/150
802.11n	5755	151	AVG	11.51	11.60	11.73	11.30	11.51	11.66	11.80	11.63
			PEAK	17.42	17.53	17.48	17.46	17.49	17.58	17.28	17.48
802.11n	5795	159	AVG	12.24	12.30	12.39	12.16	12.08	12.31	12.35	11.90
			PEAK	18.13	17.82	18.01	18.25	17.96	18.48	18.25	17.93

Table 6-18. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements

20MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				6.5 Mbps
802.11ac	5745	149	AVG	10.34
			PEAK	15.74
802.11ac	5785	157	AVG	10.15
			PEAK	15.43
802.11ac	5825	165	AVG	9.92
			PEAK	15.18



Table 6-19. 20MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

40MHz BW 802.11ac (5GHz) Conducted Power [dBm]				
Mode	Freq [MHz]	Channel	Detector	Data Rate
				13.5 Mbps
802.11ac	5755	151	AVG	10.42
			PEAK	16.61
802.11ac	5795	159	AVG	10.21
			PEAK	16.34

Table 6-20. 40MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

Mode	Freq [MHz]	Channel	Detector	80MHz BW 802.11ac (5GHz) Conducted Power [dBm]									
				Data Rate [Mbps]									
				29.3	58.5	87.8	117	175.5	234	263.3	292.5	351	390
802.11ac	5775	155	AVG	10.07	10.31	9.75	10.30	10.10	10.08	10.12	10.29	9.90	10.26
			PEAK	15.16	14.83	15.35	15.38	15.43	15.30	15.03	15.28	15.07	15.07

Table 6-21. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 39 of 120

# MIMO Output Power Measurement – 802.11n/ac (2.4GHz, 5GHz)

§15.247(b)(3); RSS-210 [A8.4]

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11n	2412	1	AVG	9.25
			PEAK	14.70
802.11n	2437	6	AVG	9.44
			PEAK	14.85
802.11n	2462	11	AVG	9.37
			PEAK	14.92

**Table 6-22. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements (Antenna 1)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11n	2412	1	AVG	9.15
			PEAK	14.70
802.11n	2437	6	AVG	9.17
			PEAK	14.75
802.11n	2462	11	AVG	9.21
			PEAK	14.86

**Table 6-23. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements (Antenna 2)**

Mode	Freq [MHz]	Channel	Detector	Data Rate
				MCS8
802.11n	2412	1	AVG	12.21
			PEAK	17.71
802.11n	2437	6	AVG	12.32
			PEAK	17.81
802.11n	2462	11	AVG	12.30
			PEAK	17.90

**Table 6-24. 20MHz BW 802.11n (2.4GHz) Conducted Output Power Measurements (Summed)**

Mode	Freq [MHz]	Channel	Detector	Data Rate
				MCS8
802.11n	5745	149	AVG	8.29
			PEAK	13.57
802.11n	5765	153	AVG	8.20
			PEAK	13.56
802.11n	5785	157	AVG	7.95
			PEAK	13.39
802.11n	5805	161	AVG	8.18
			PEAK	13.51
802.11n	5825	165	AVG	7.92
			PEAK	13.34

**Table 6-25. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Antenna 1)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11n	5745	149	AVG	10.02
			PEAK	15.47
802.11n	5765	153	AVG	9.99
			PEAK	15.59
802.11n	5785	157	AVG	9.79
			PEAK	15.46
802.11n	5805	161	AVG	9.64
			PEAK	15.17
802.11n	5825	165	AVG	9.43
			PEAK	14.88

**Table 6-26. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Antenna 2)**

Mode	Freq [MHz]	Channel	Detector	Data Rate
				MCS8
802.11n	5745	149	AVG	12.14
			PEAK	17.63
802.11n	5765	153	AVG	12.09
			PEAK	17.70
802.11n	5785	157	AVG	12.20
			PEAK	17.56
802.11n	5805	161	AVG	11.98
			PEAK	17.43
802.11n	5825	165	AVG	11.75
			PEAK	17.19

**Table 6-27. 20MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Summed)**

Mode	Freq [MHz]	Channel	Detector	Data Rate
				MCS8
802.11n	5755	151	AVG	8.39
			PEAK	13.71
802.11n	5795	159	AVG	8.20
			PEAK	13.89

**Table 6-28. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Antenna 1)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11n	5755	151	AVG	9.94
			PEAK	15.36
802.11n	5795	159	AVG	9.69
			PEAK	15.23

**Table 6-29. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Antenna 2)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11n	5755	151	AVG	12.24
			PEAK	17.62
802.11n	5795	159	AVG	12.02
			PEAK	17.62

**Table 6-30. 40MHz BW 802.11n (5GHz) Conducted Output Power Measurements (Summed)**

Mode	Freq [MHz]	Channel	Detector	Data Rate
				MCS8
802.11ac	5775	155	AVG	6.17
			PEAK	11.88

**Table 6-31. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements (Antenna 1)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11ac	5775	155	AVG	7.51
			PEAK	14.11

**Table 6-32. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements (Antenna 2)**

Mode	Freq [MHz]	Channel	Detector	Data
				MCS8
802.11ac	5775	155	AVG	9.90
			PEAK	16.15

**Table 6-33. 80MHz BW 802.11ac (5GHz) Conducted Output Power Measurements (Summed)**

## 6.4 Power Spectral Density (802.11a/b/g/n/ac) §15.247(e); RSS-210 [A8.2]

### Test Overview and Limit

The peak power density is measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated and the worst case configuration results are reported in this section.

*The maximum permissible power spectral density is 8 dBm in any 3 kHz band.*

### Test Procedure Used


KDB 558074 v03r01 – Section 10.2 Method PKPSD

### Test Settings

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 10kHz
4. VBW = 1MHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-4. Test Instrument & Measurement Setup**

### Test Notes



The following MIMO peak power spectral density measurements are determined by summing the power spectral density in linear terms from each antenna transmitting separately.


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 41 of 120	

### Antenna-1 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	0.98	8.000	-7.02	Pass
2437	6	b	1	0.63	8.000	-7.37	Pass
2462	11	b	1	0.70	8.000	-7.30	Pass
2412	1	g	6	-5.91	8.000	-13.91	Pass
2437	6	g	6	-5.74	8.000	-13.74	Pass
2462	11	g	6	-5.32	8.000	-13.32	Pass
2412	1	n	6.5/7.2 (MCS0)	-7.08	8.000	-15.08	Pass
2437	6	n	6.5/7.2 (MCS0)	-6.77	8.000	-14.77	Pass
2462	11	n	6.5/7.2 (MCS0)	-6.77	8.000	-14.77	Pass
5745	149	a	6	-8.54	8.000	-16.54	Pass
5785	157	a	6	-8.87	8.000	-16.87	Pass
5825	165	a	6	-9.26	8.000	-17.26	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-9.04	8.000	-17.04	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-8.11	8.000	-16.11	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-7.09	8.000	-15.09	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-10.00	8.000	-18.00	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-10.84	8.000	-18.84	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-16.30	8.000	-24.30	Pass

**Table 6-34. Conducted Power Density Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 42 of 120	

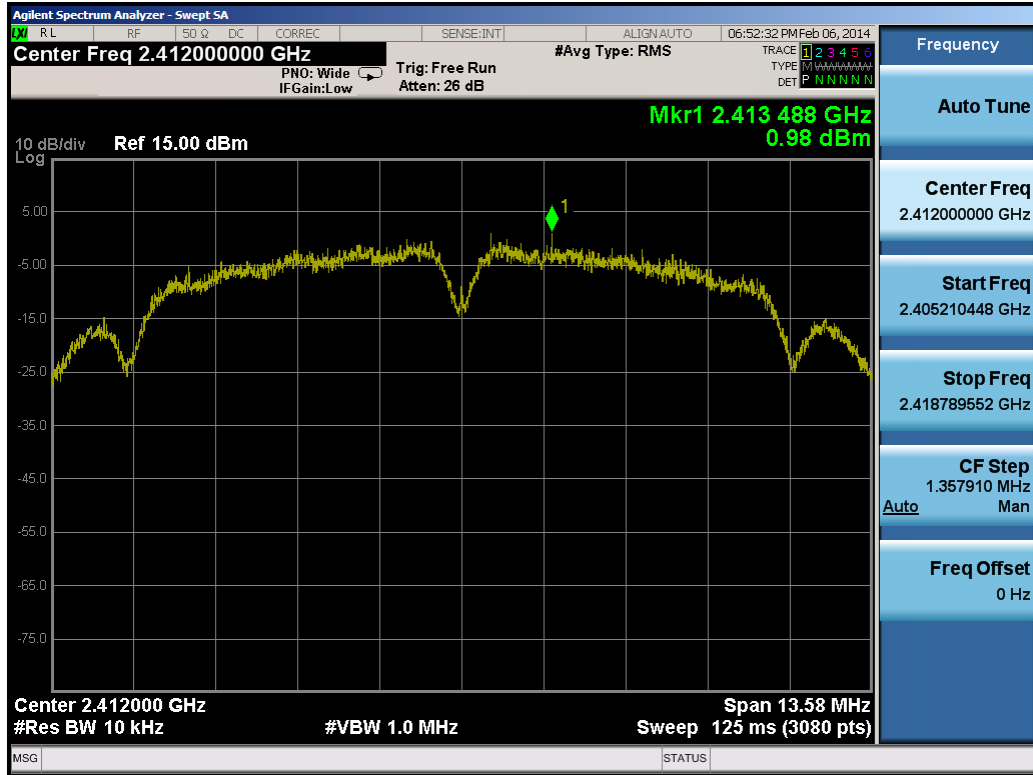


Plot 6-37. Power Spectral Density Plot (802.11b – Ch. 1)

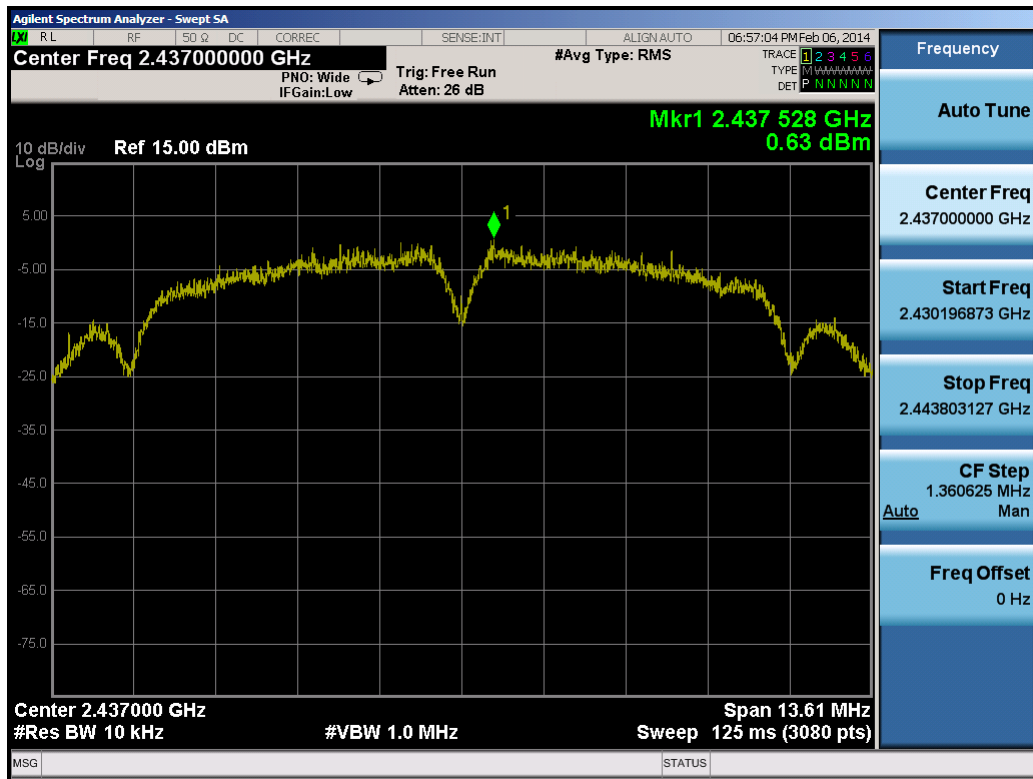


Plot 6-38. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 43 of 120

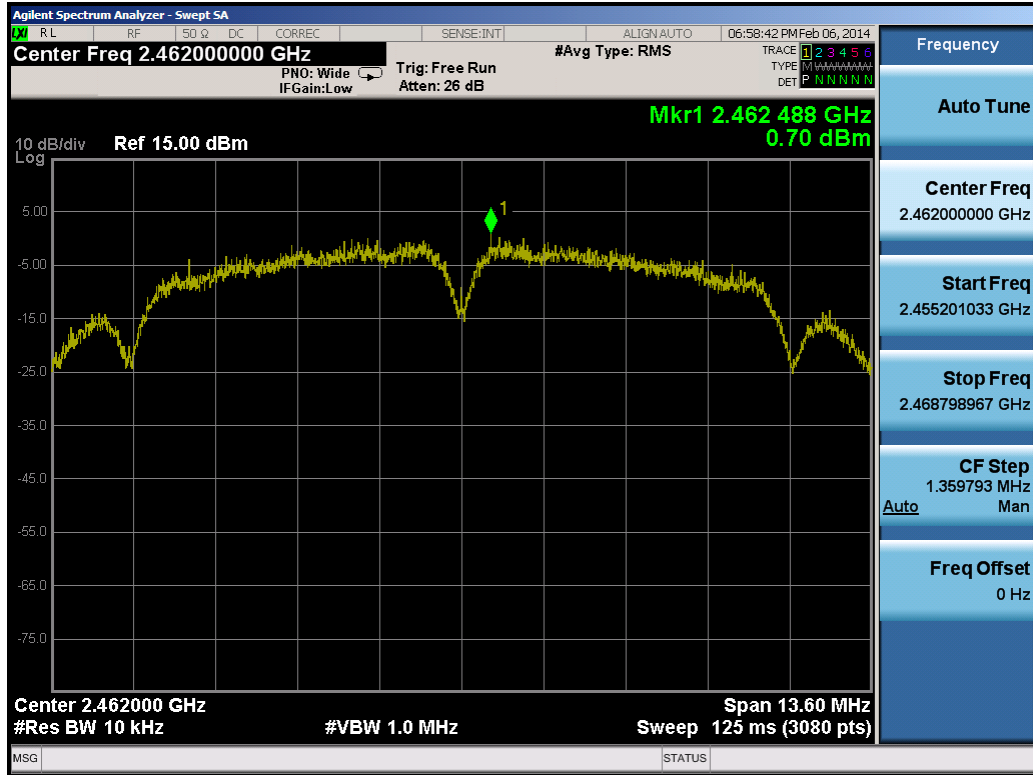


Plot 6-39. Power Spectral Density Plot (802.11b – Ch. 11)

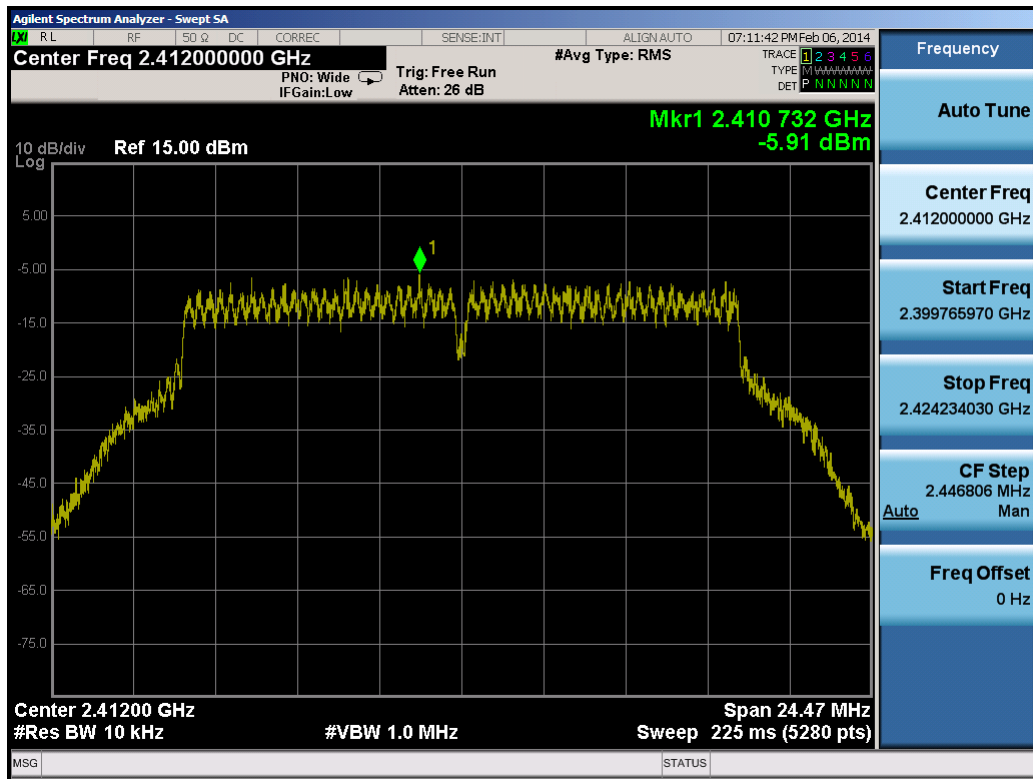


Plot 6-40. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 44 of 120

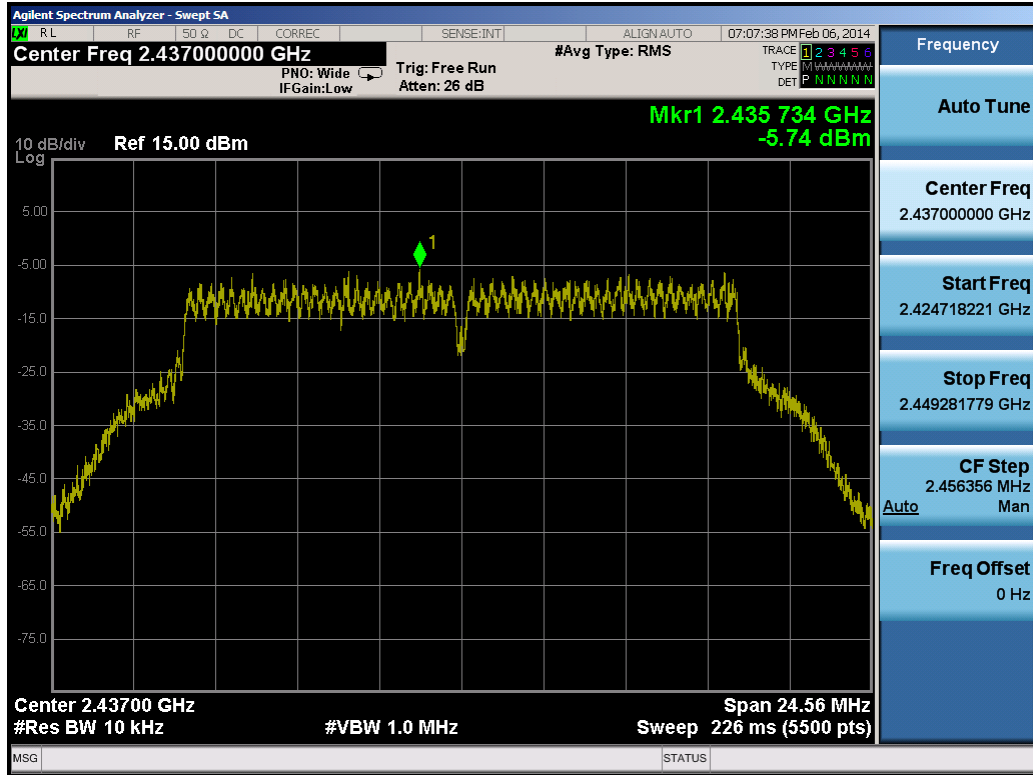


Plot 6-41. Power Spectral Density Plot (802.11g – Ch. 6)

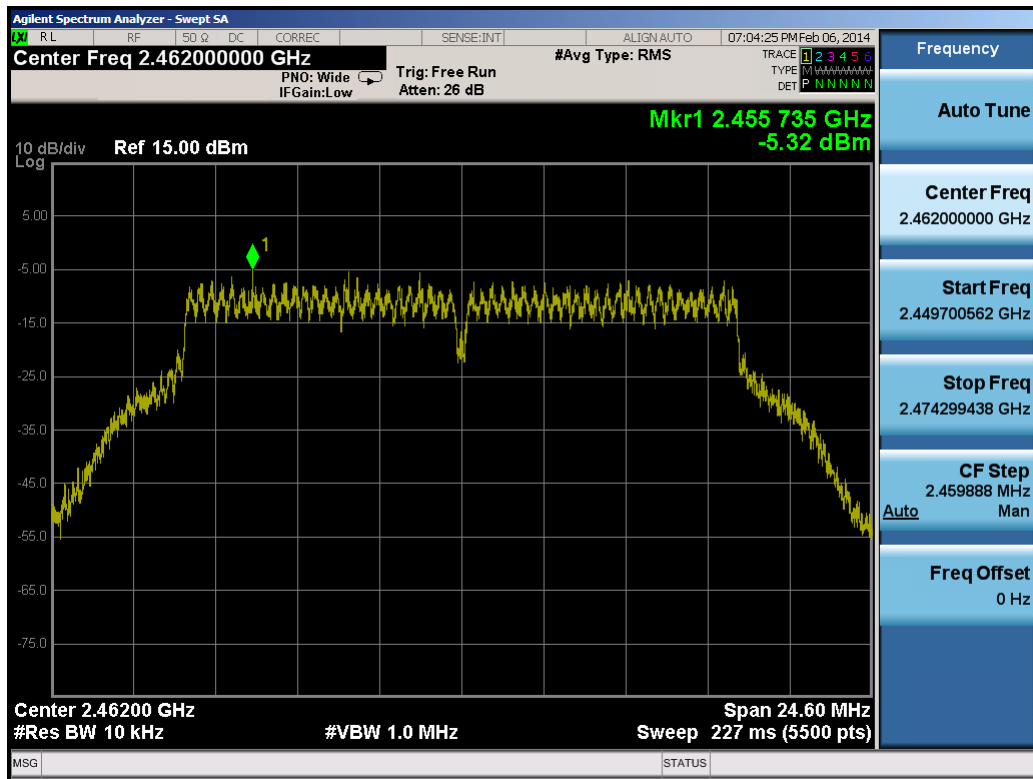


Plot 6-42. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 45 of 120

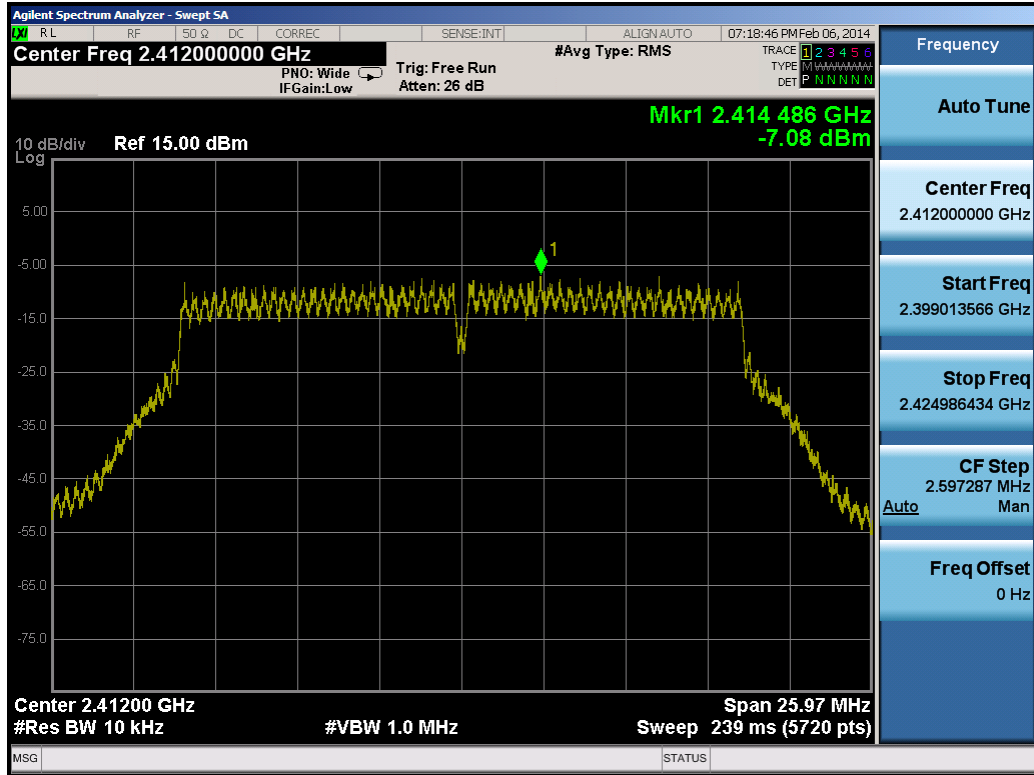


Plot 6-43. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

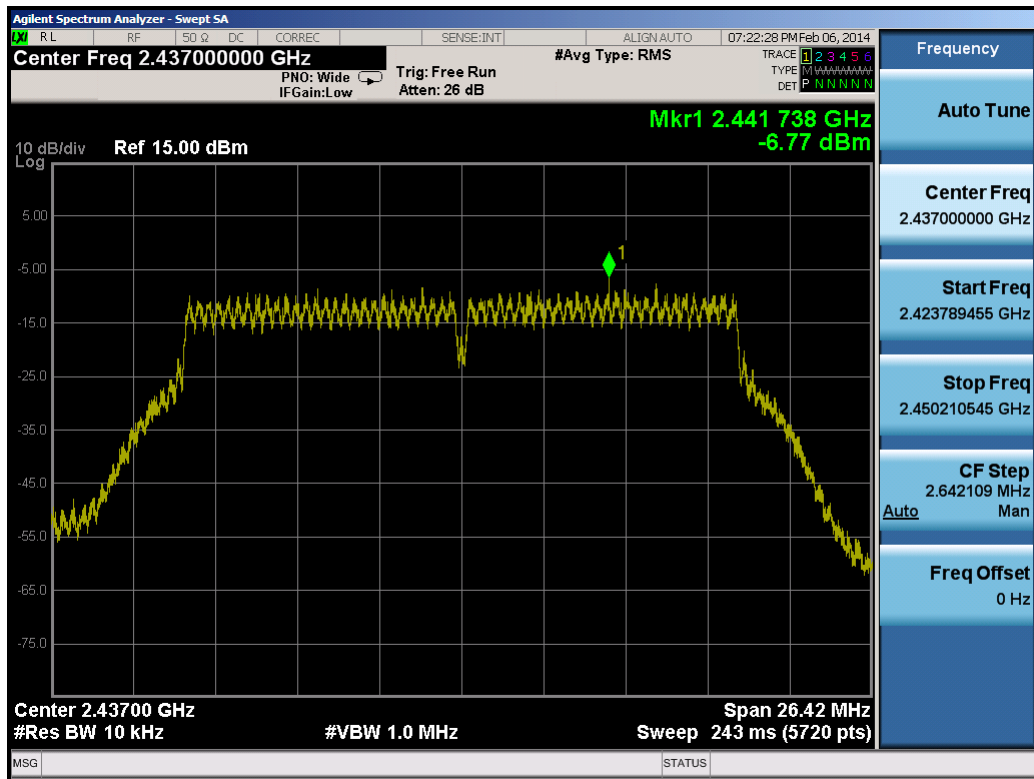


Plot 6-44. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 46 of 120

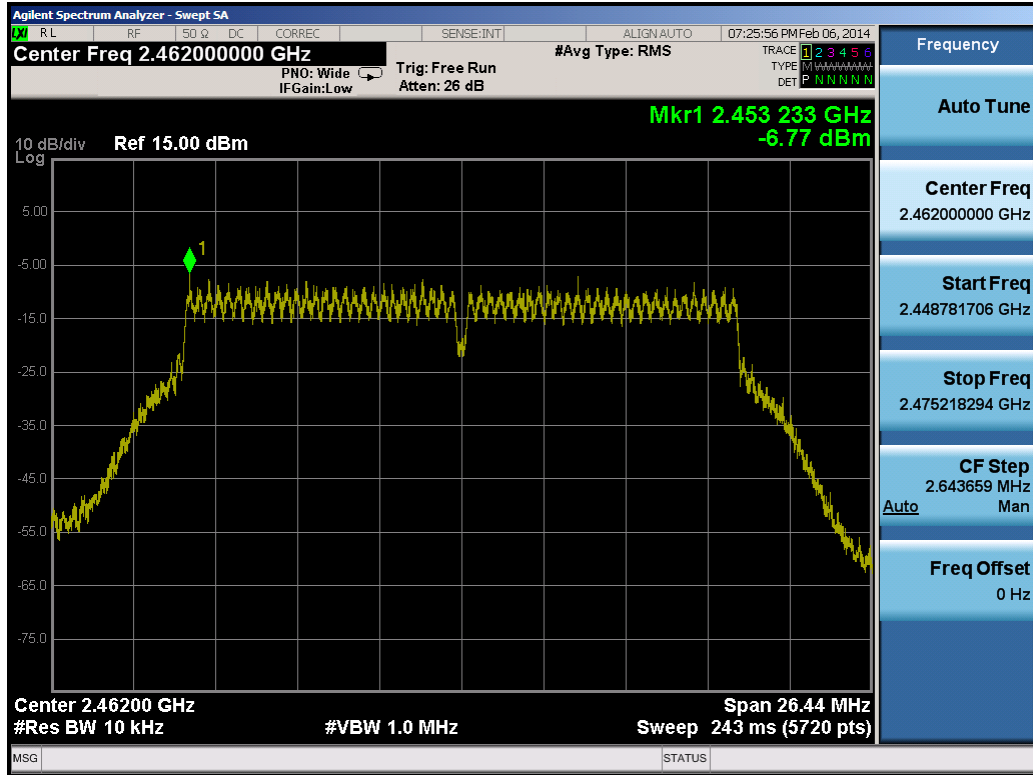


Plot 6-45. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

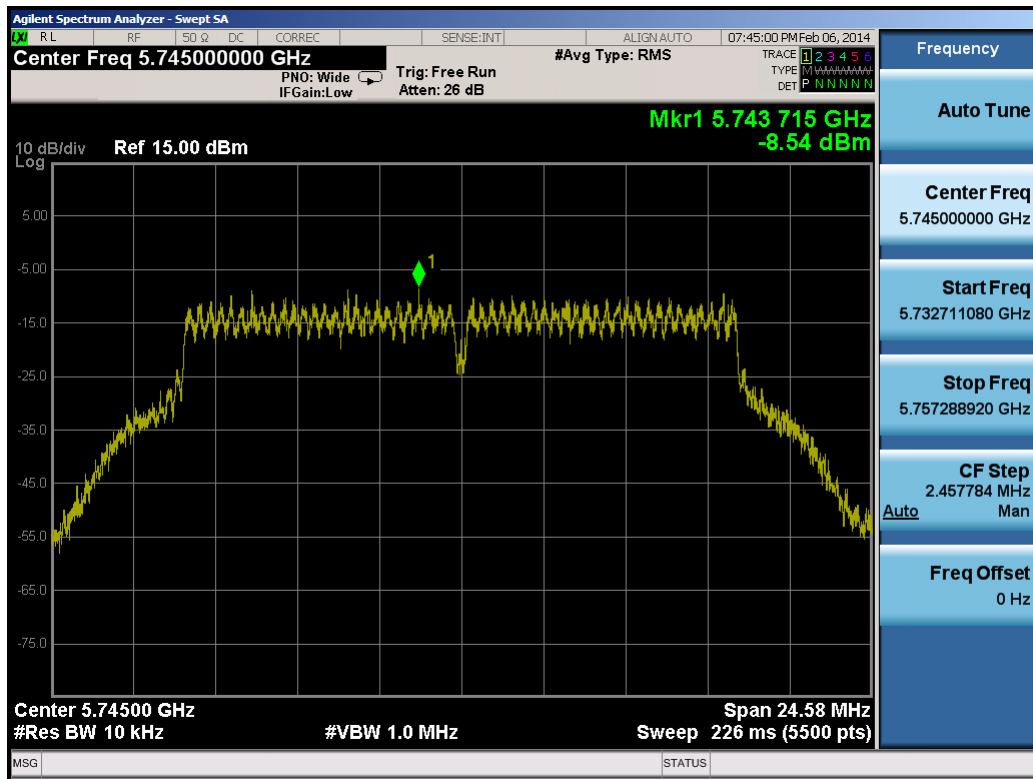


Plot 6-46. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 47 of 120

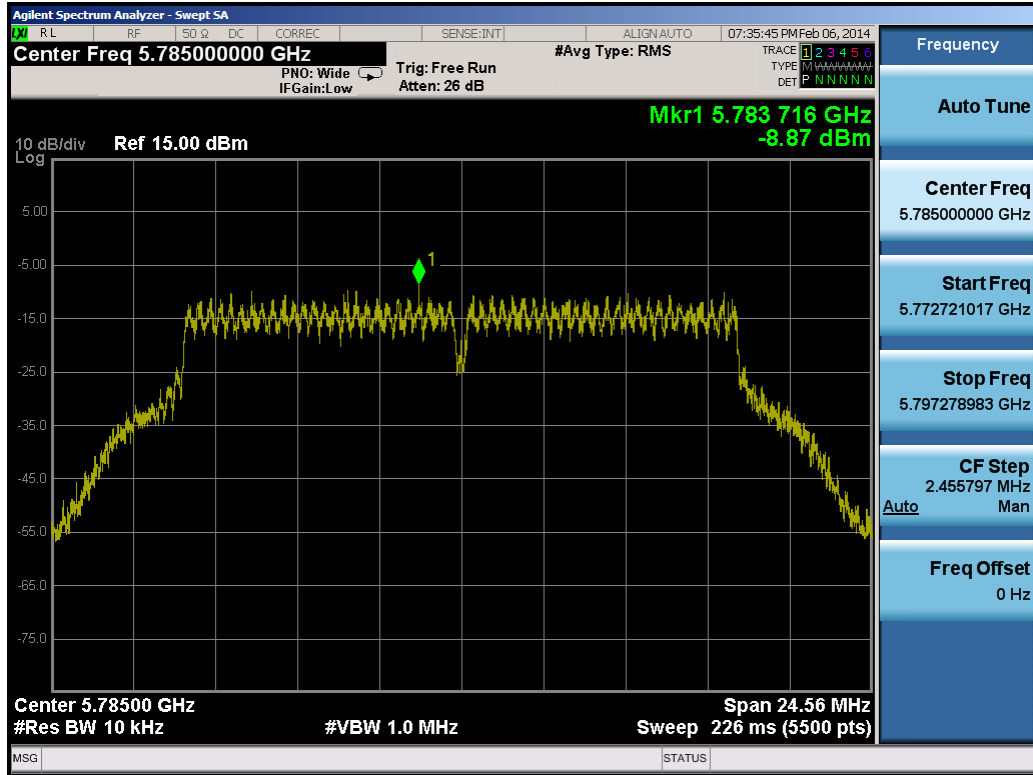


Plot 6-47. Power Spectral Density Plot (802.11a – Ch. 157)

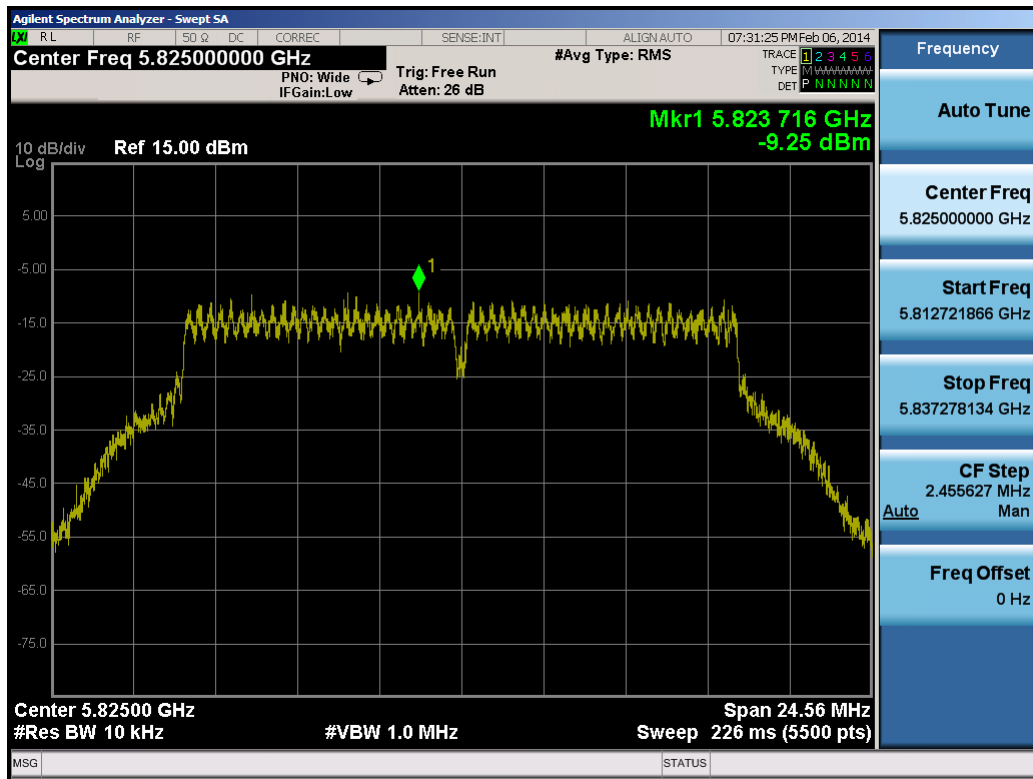


Plot 6-48. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 48 of 120

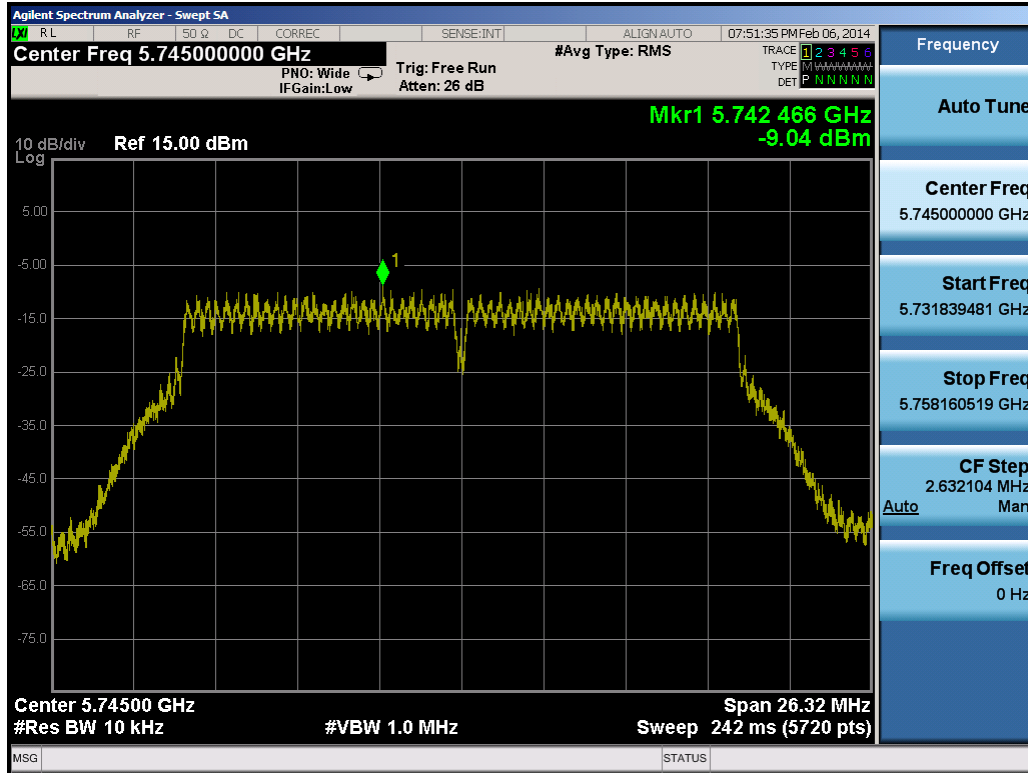


Plot 6-49. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

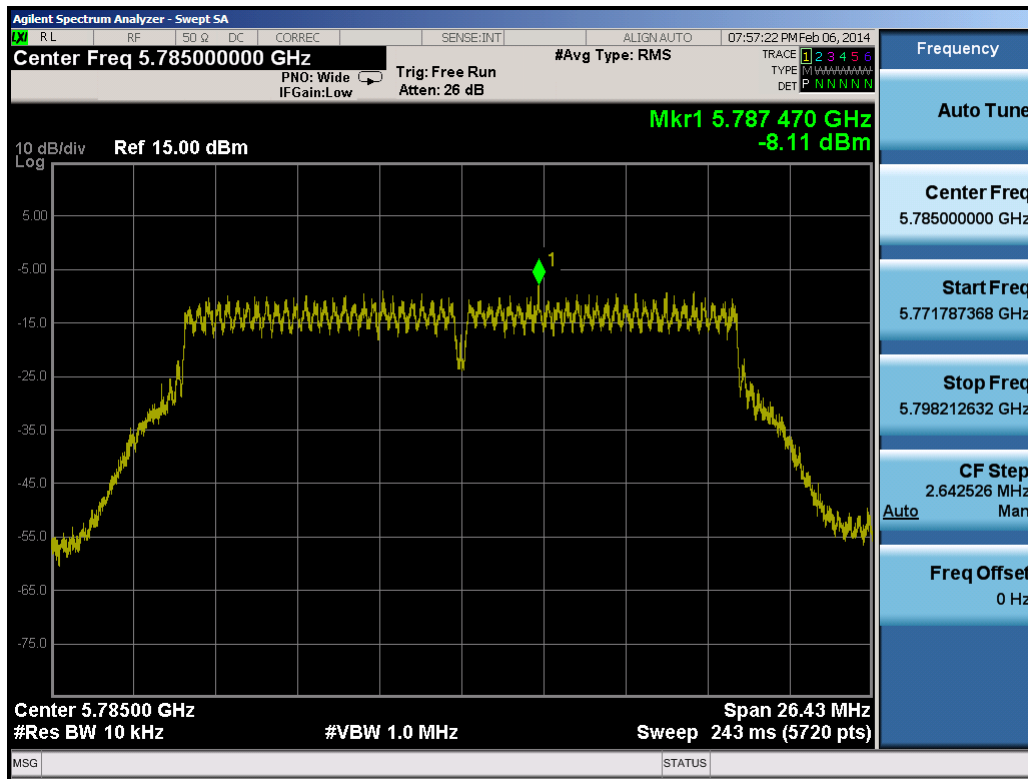


Plot 6-50. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 49 of 120

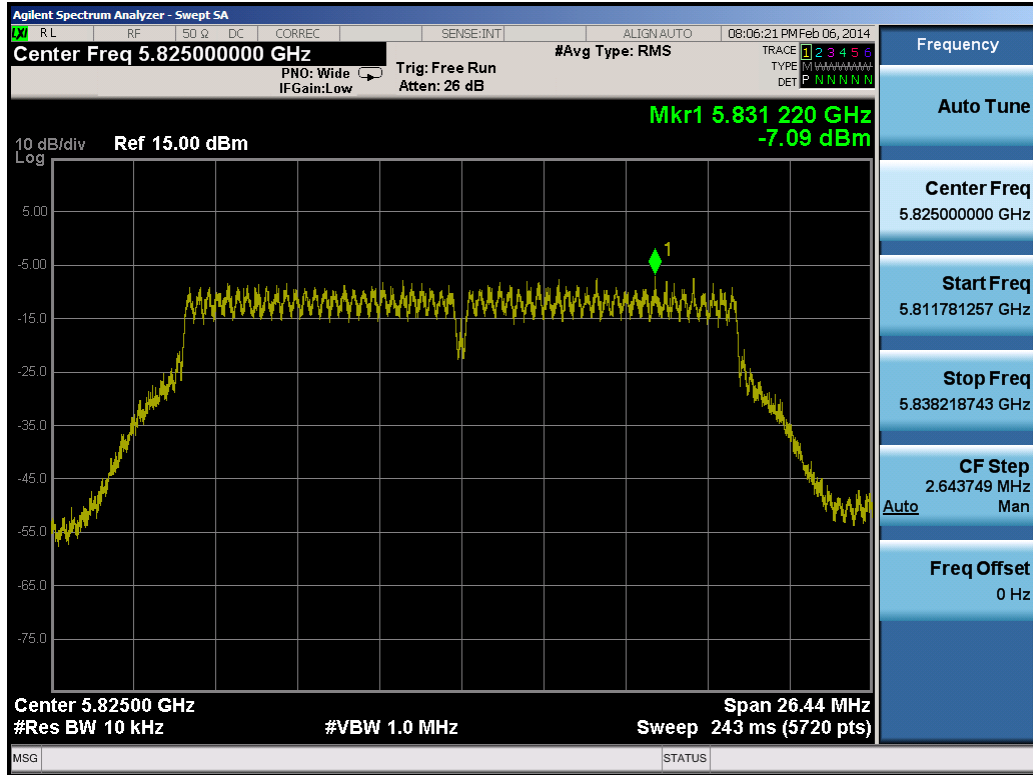


Plot 6-51. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

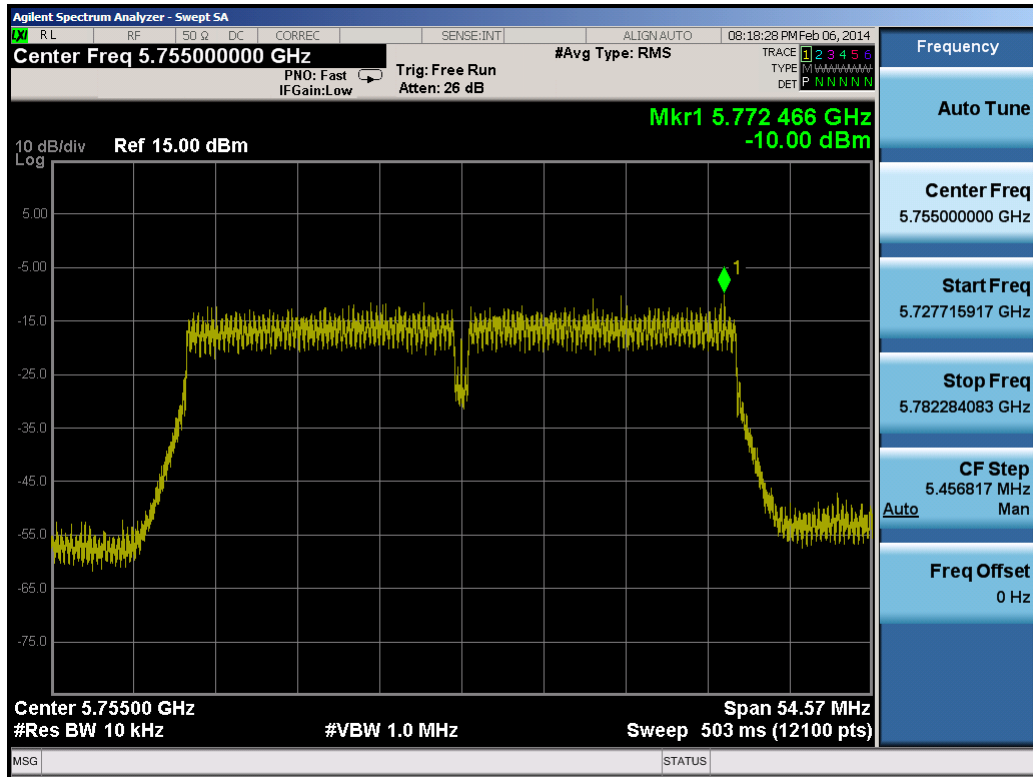


Plot 6-52. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMG900S	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 50 of 120

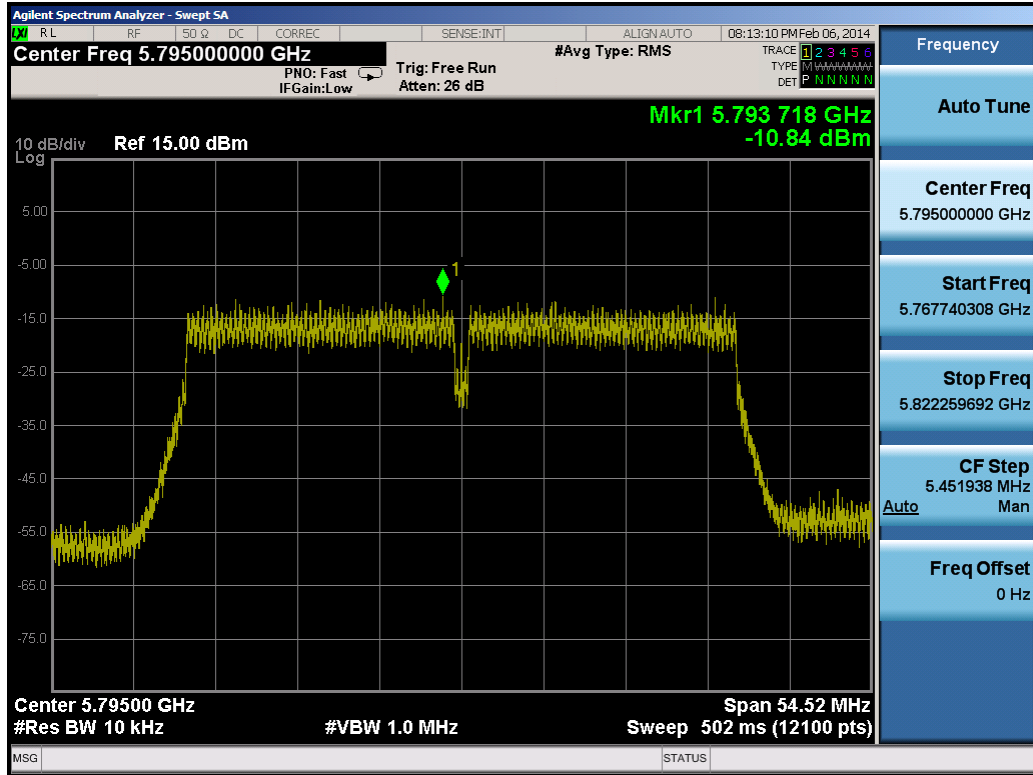

Plot 6-53. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

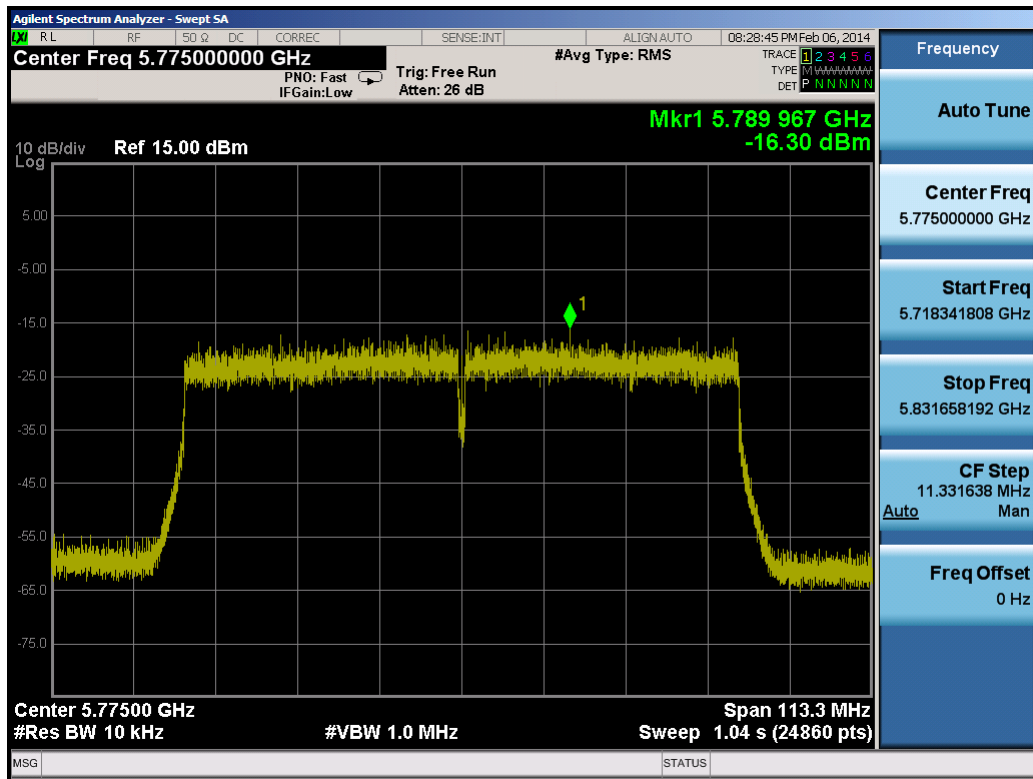



Plot 6-54. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 51 of 120

### Antenna-2 Power Spectral Density Measurements


Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	0.97	8.000	-7.03	Pass
2437	6	b	1	-0.40	8.000	-8.40	Pass
2462	11	b	1	-0.86	8.000	-8.86	Pass
2412	1	g	6	-6.04	8.000	-14.04	Pass
2437	6	g	6	-6.37	8.000	-14.37	Pass
2462	11	g	6	-5.36	8.000	-13.36	Pass
2412	1	n	6.5/7.2 (MCS0)	-8.71	8.000	-16.71	Pass
2437	6	n	6.5/7.2 (MCS0)	-8.04	8.000	-16.04	Pass
2462	11	n	6.5/7.2 (MCS0)	-8.59	8.000	-16.59	Pass
5745	149	a	6	-6.26	8.000	-14.26	Pass
5785	157	a	6	-5.46	8.000	-13.46	Pass
5825	165	a	6	-6.42	8.000	-14.42	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-6.47	8.000	-14.47	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-6.73	8.000	-14.73	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-6.52	8.000	-14.52	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-8.55	8.000	-16.55	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-7.71	8.000	-15.71	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-14.68	8.000	-22.68	Pass

**Table 6-35. Conducted Power Density Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 52 of 120	

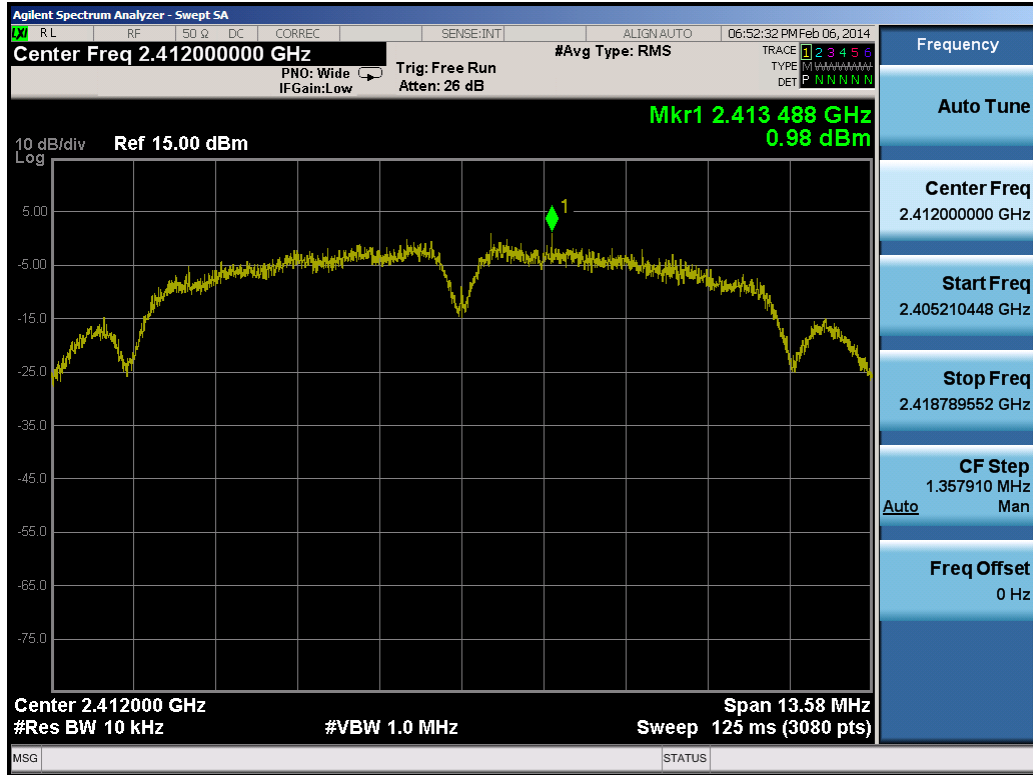


Plot 6-55. Power Spectral Density Plot (802.11b – Ch. 1)

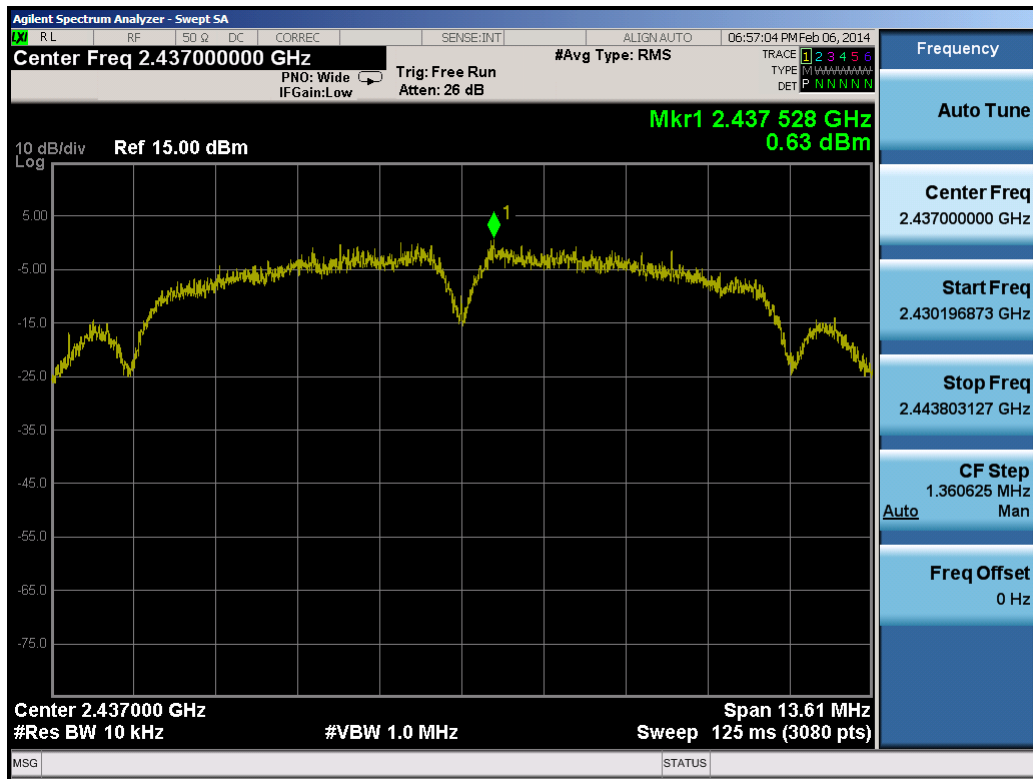


Plot 6-56. Power Spectral Density Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 53 of 120

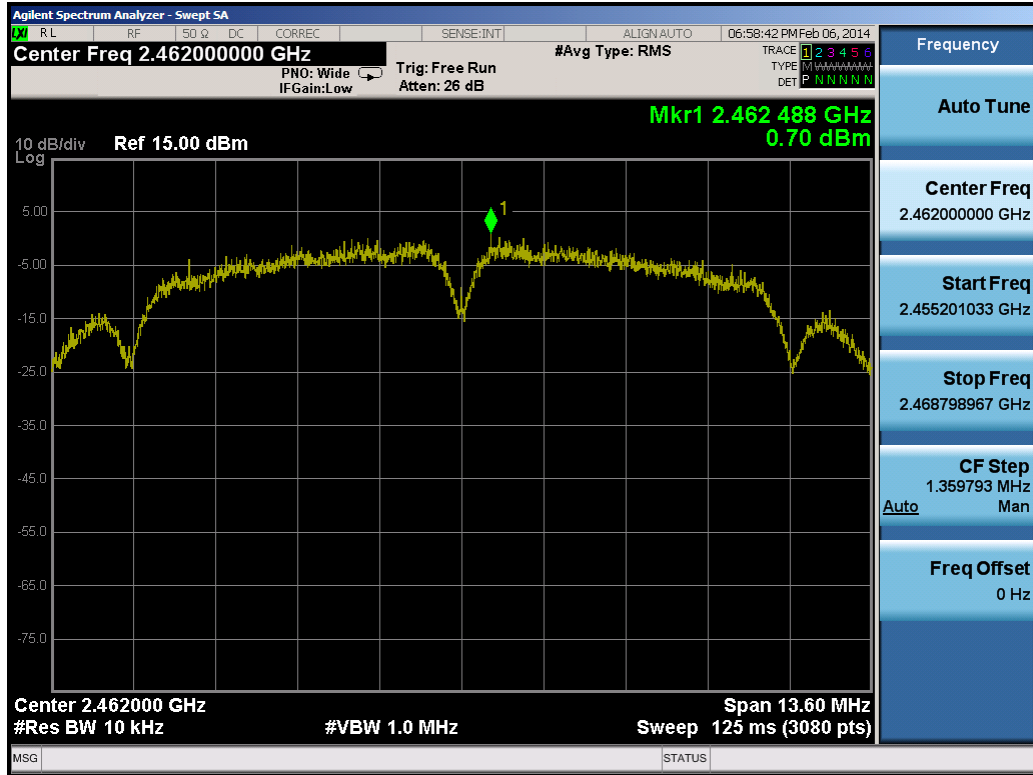


Plot 6-57. Power Spectral Density Plot (802.11b – Ch. 11)

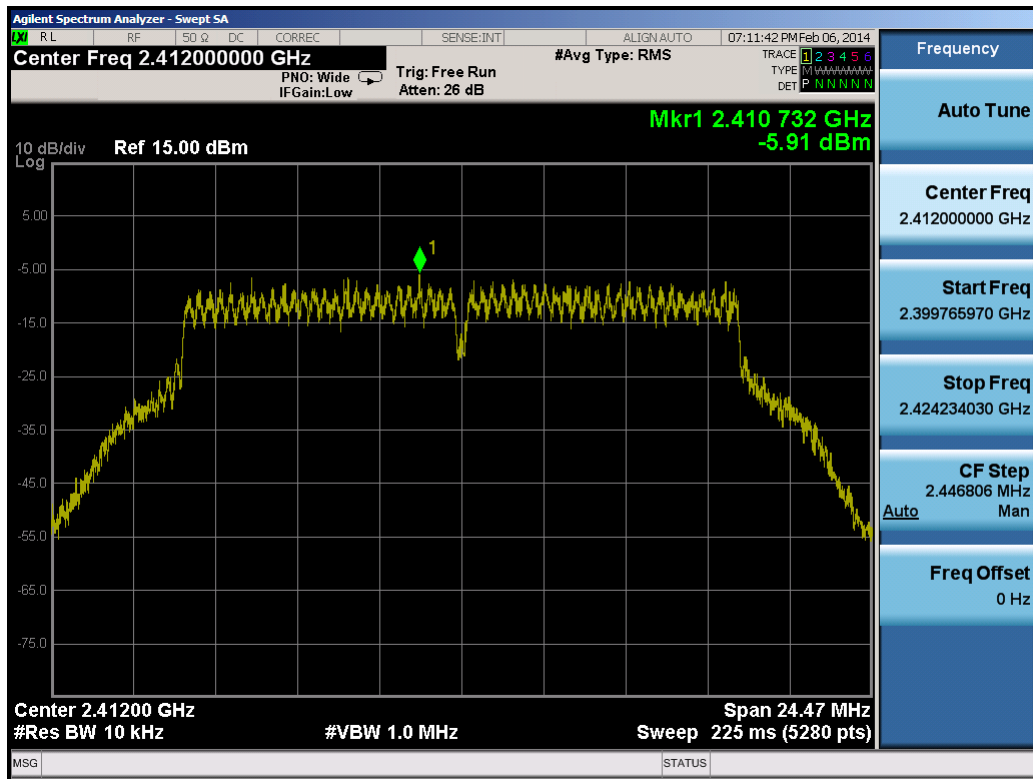


Plot 6-58. Power Spectral Density Plot (802.11g – Ch. 1)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 54 of 120

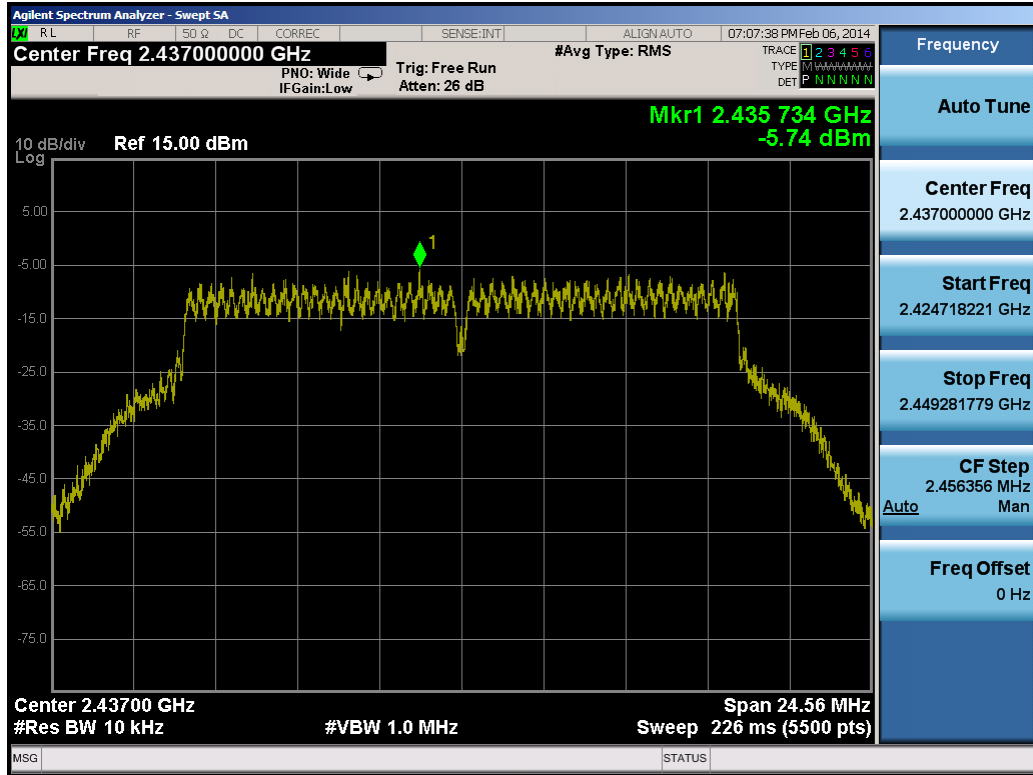


Plot 6-59. Power Spectral Density Plot (802.11g – Ch. 6)

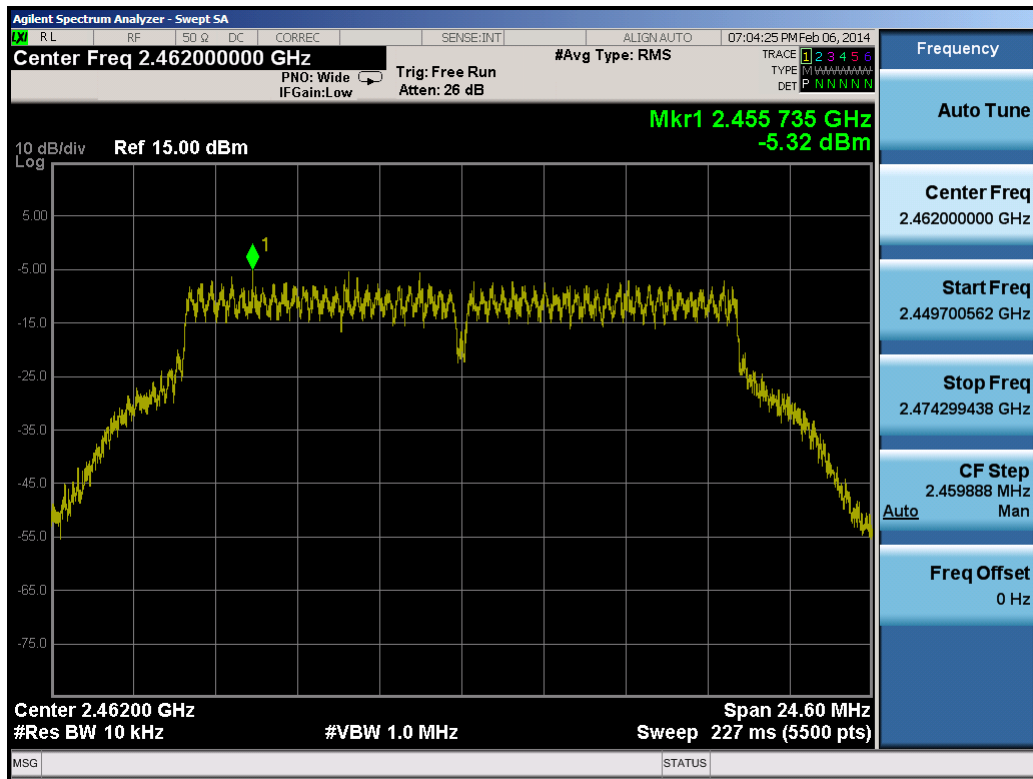


Plot 6-60. Power Spectral Density Plot (802.11g – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 55 of 120

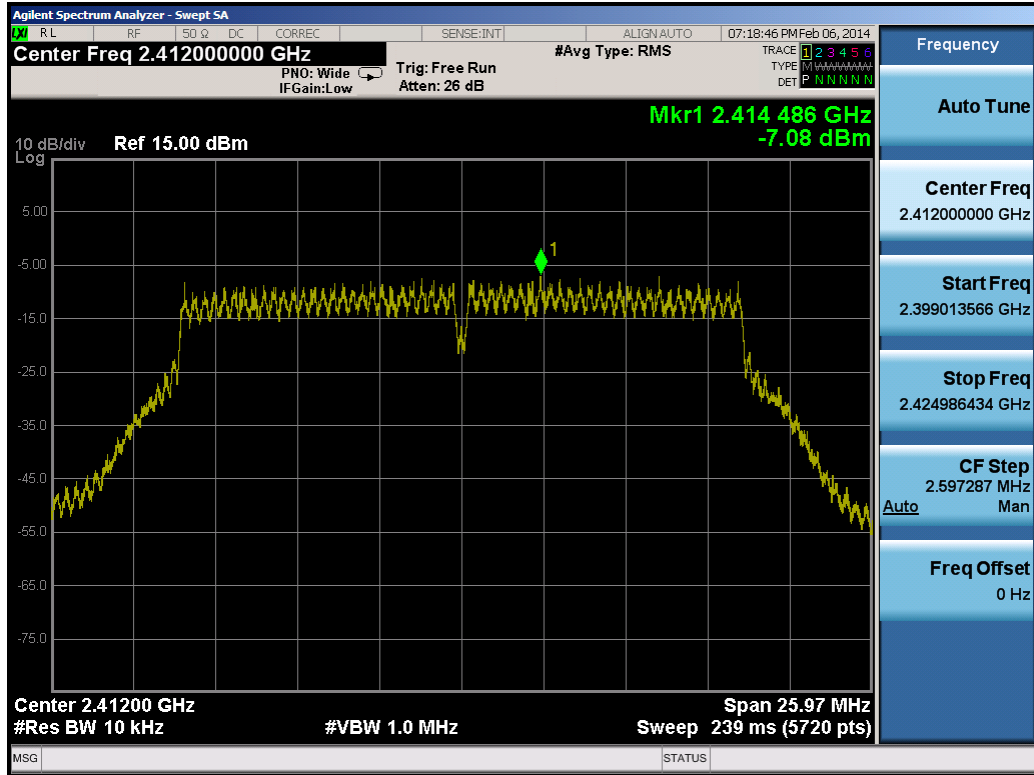


Plot 6-61. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 1)

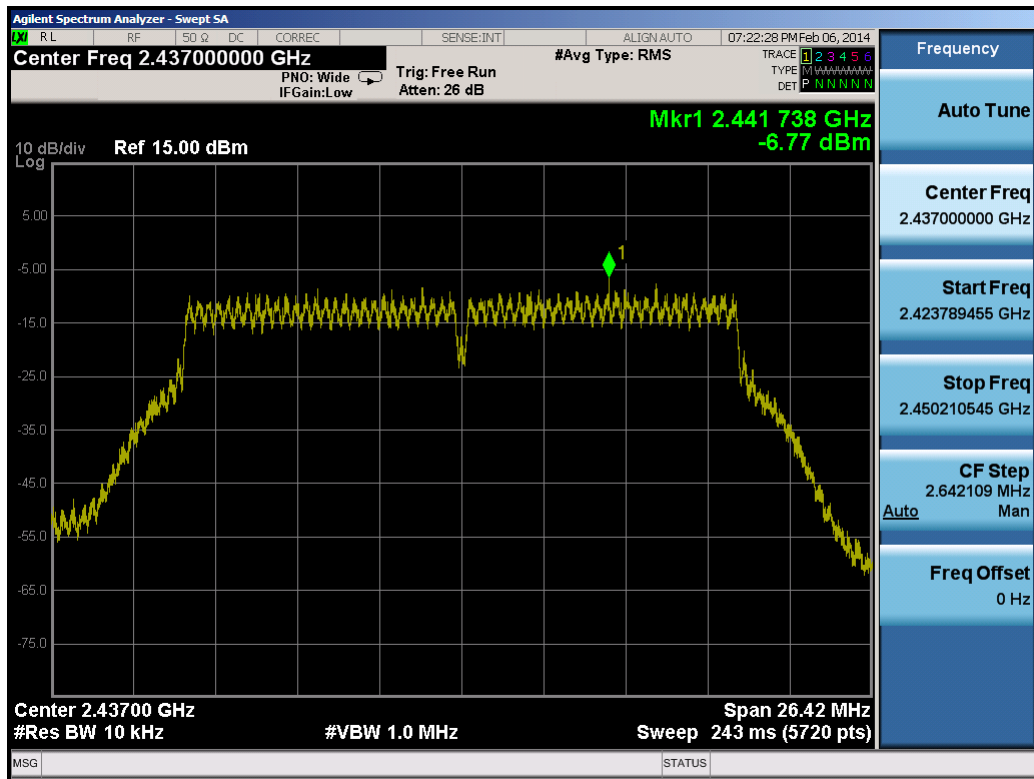


Plot 6-62. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 56 of 120

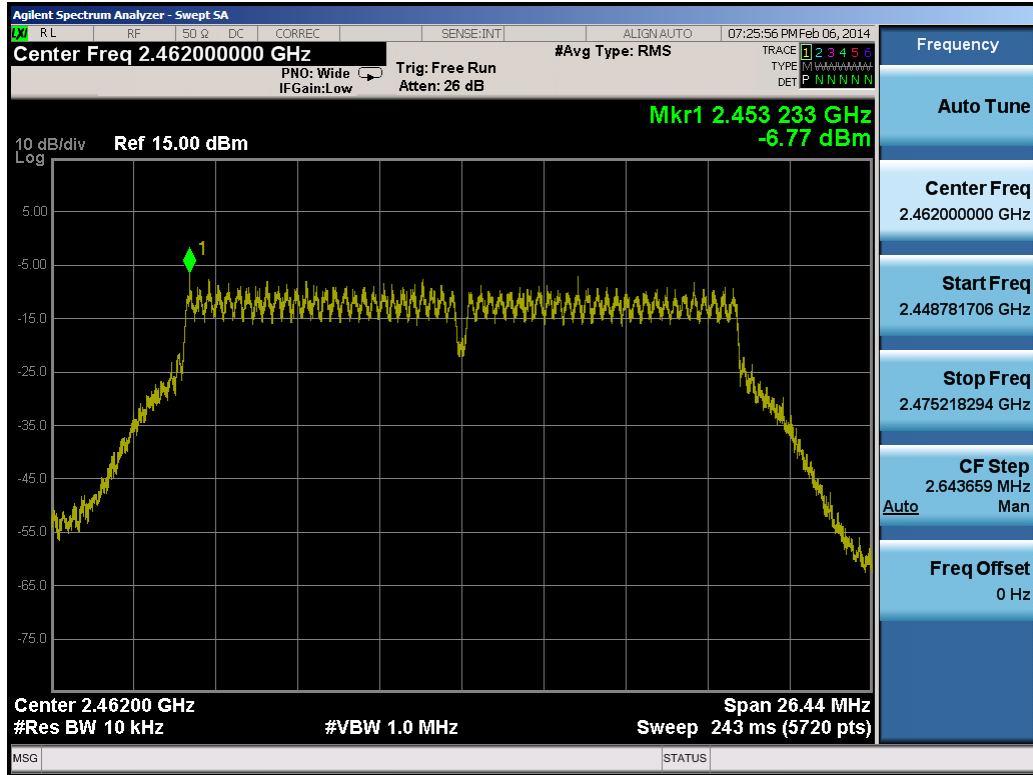


Plot 6-63. Power Spectral Density Plot (802.11n (2.4GHz) – Ch. 11)

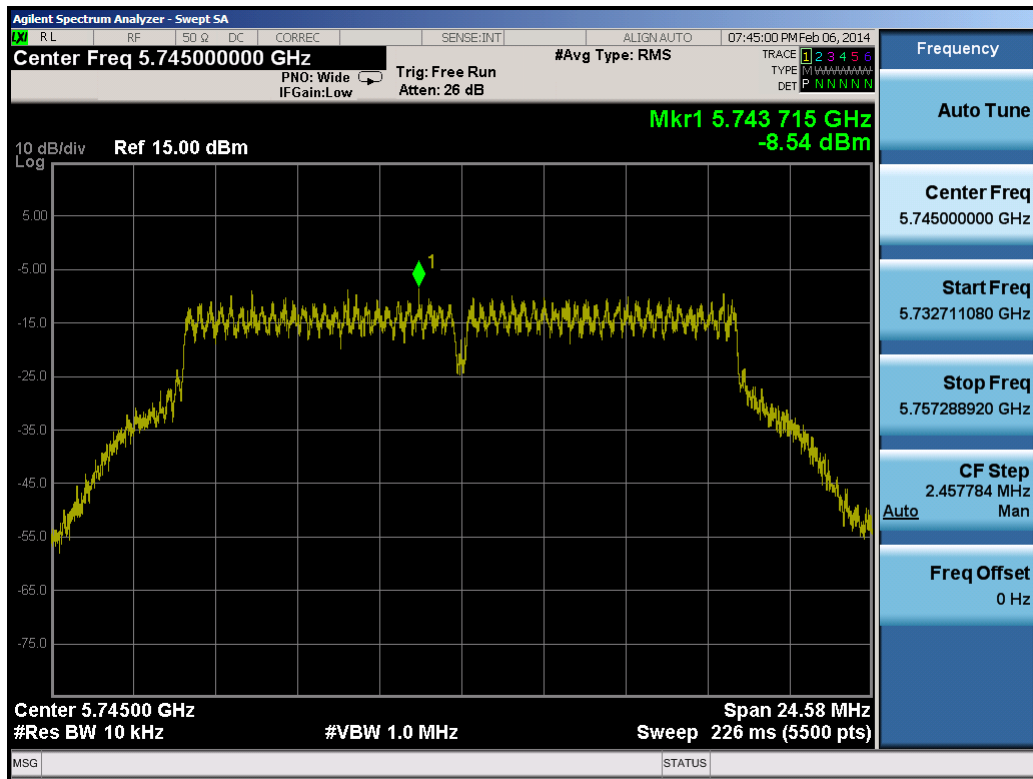


Plot 6-64. Power Spectral Density Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 57 of 120

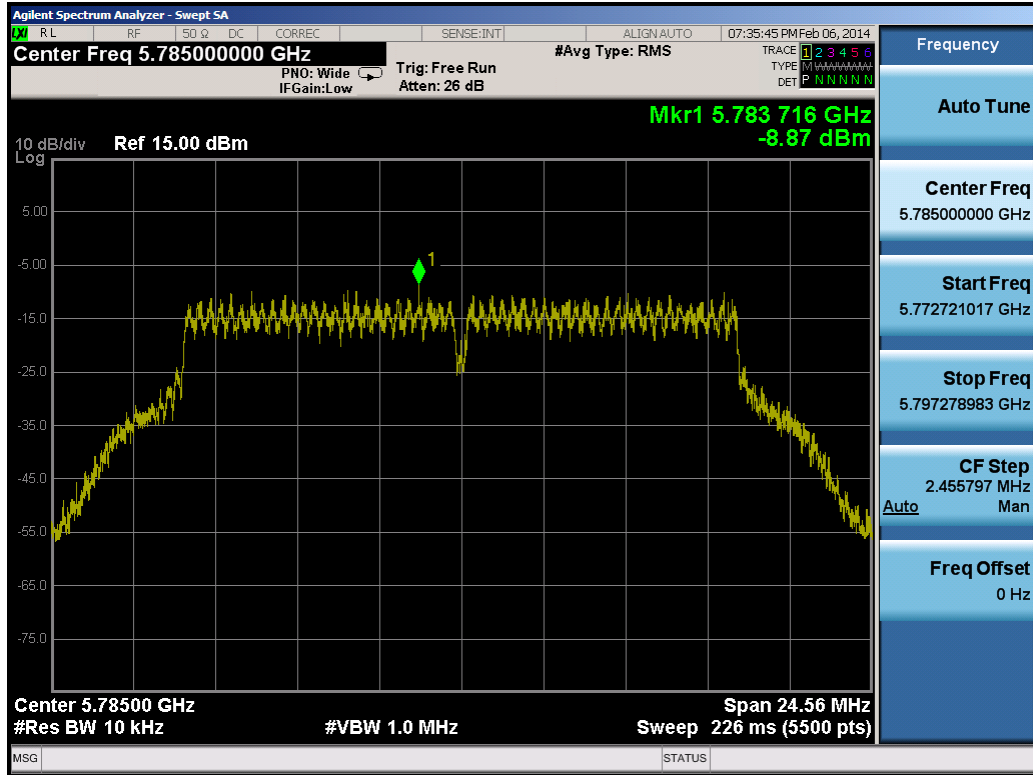


Plot 6-65. Power Spectral Density Plot (802.11a – Ch. 157)

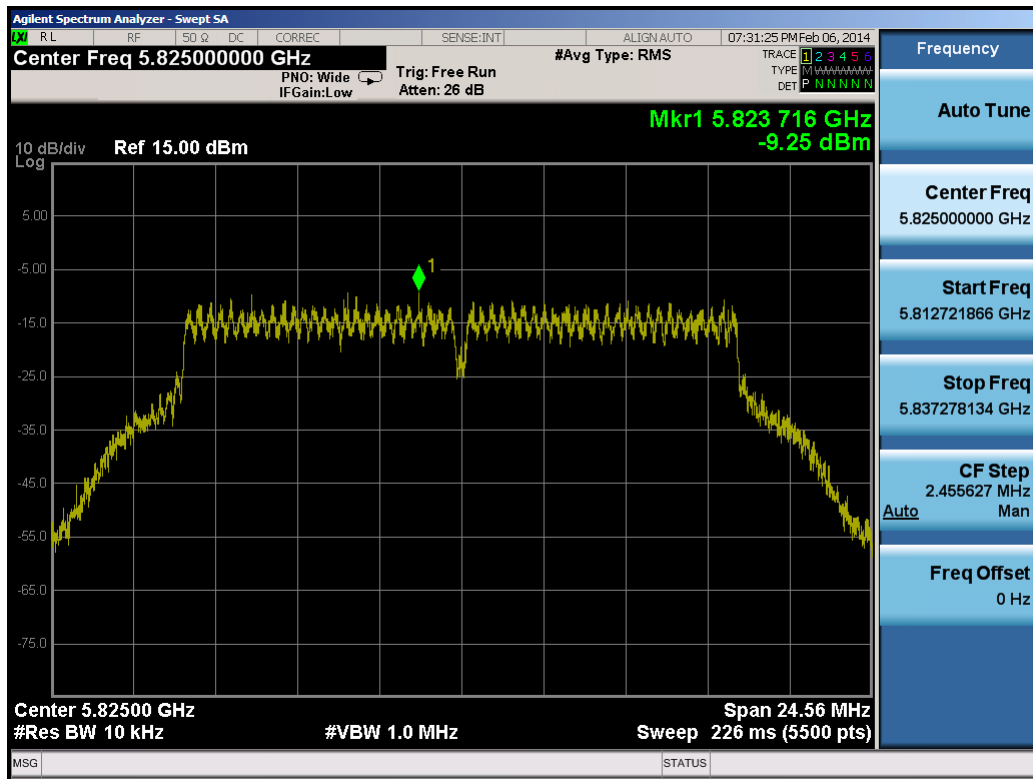


Plot 6-66. Power Spectral Density Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 58 of 120

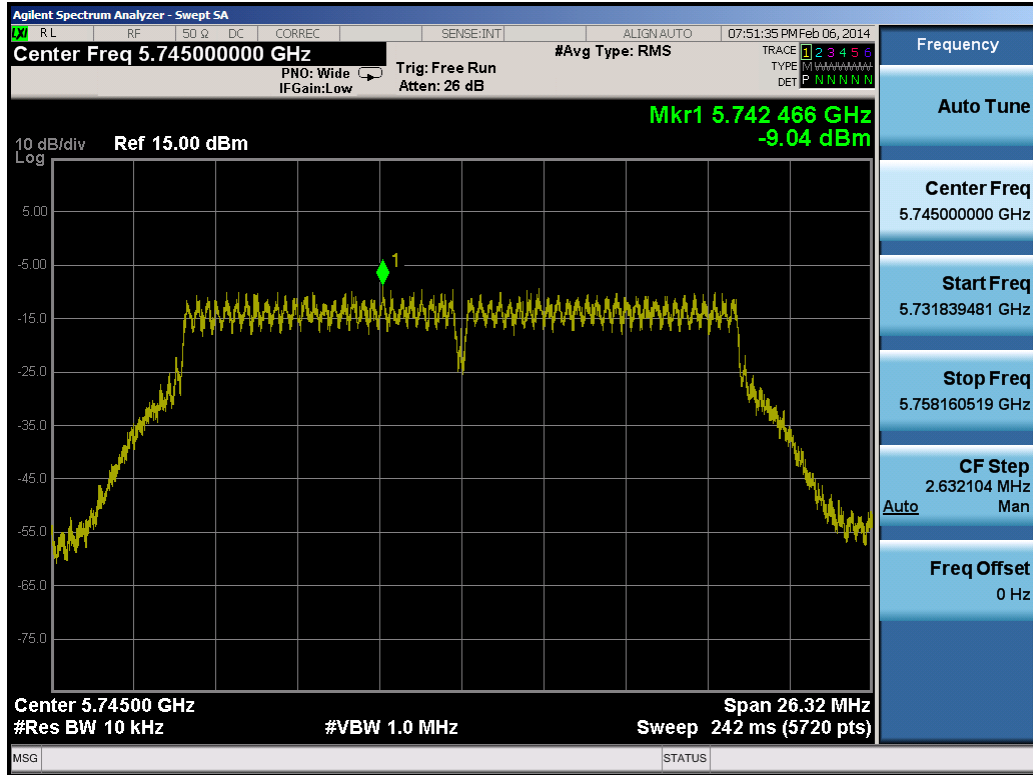


Plot 6-67. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

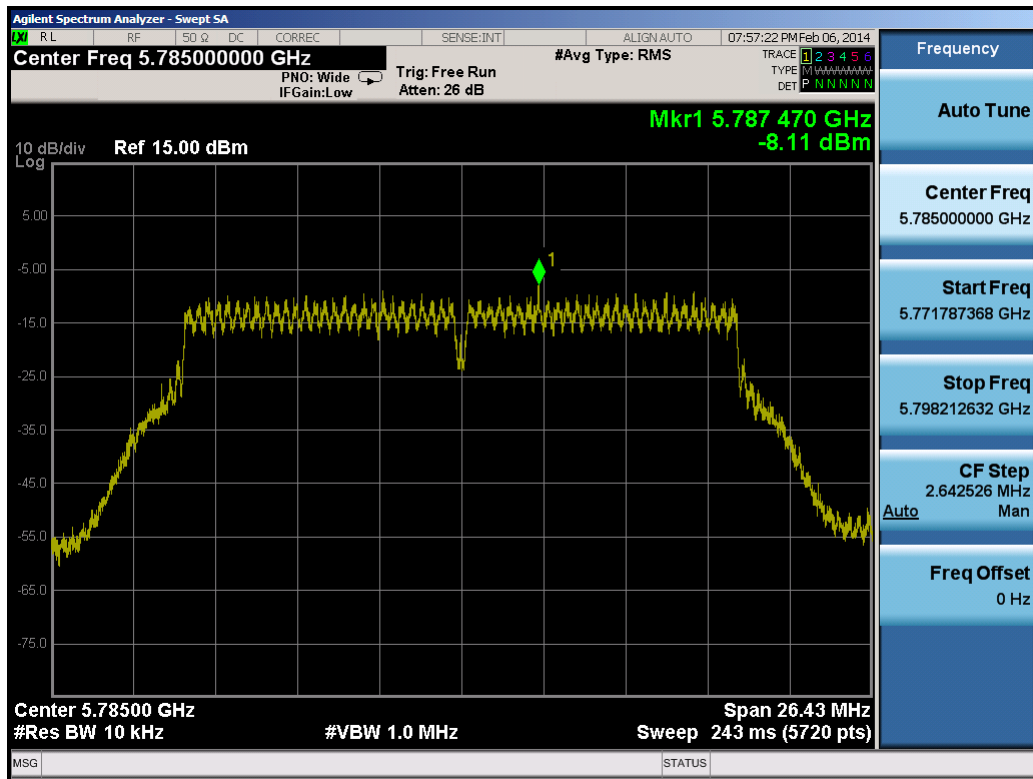


Plot 6-68. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 157)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 59 of 120

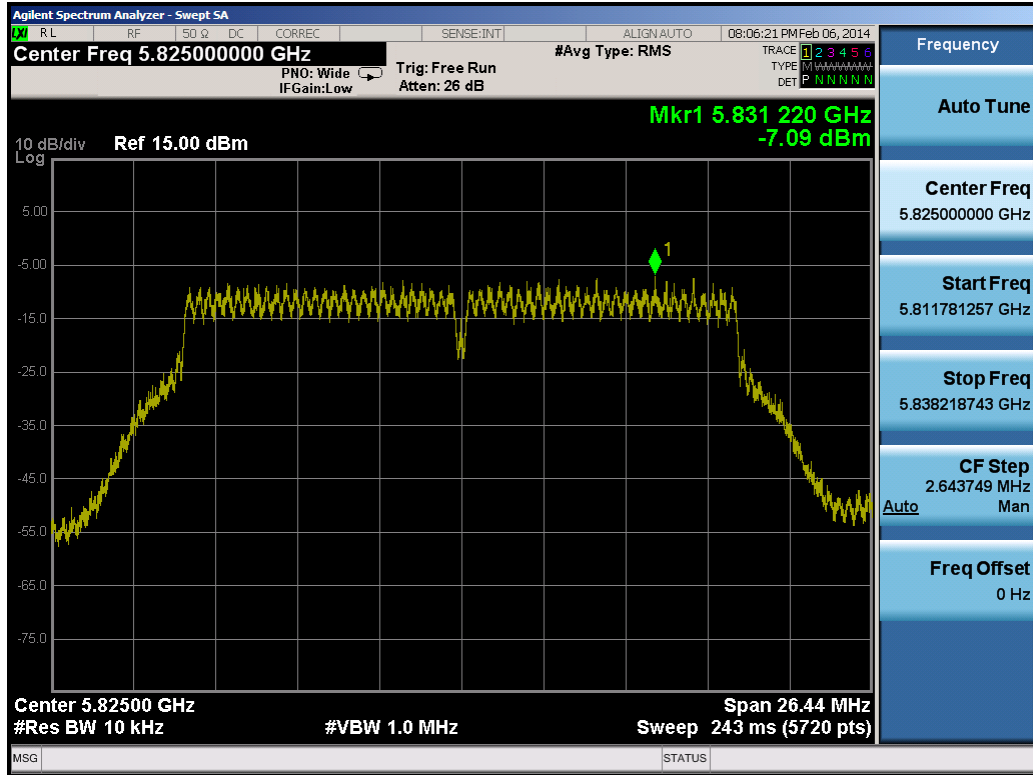


Plot 6-69. Power Spectral Density Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

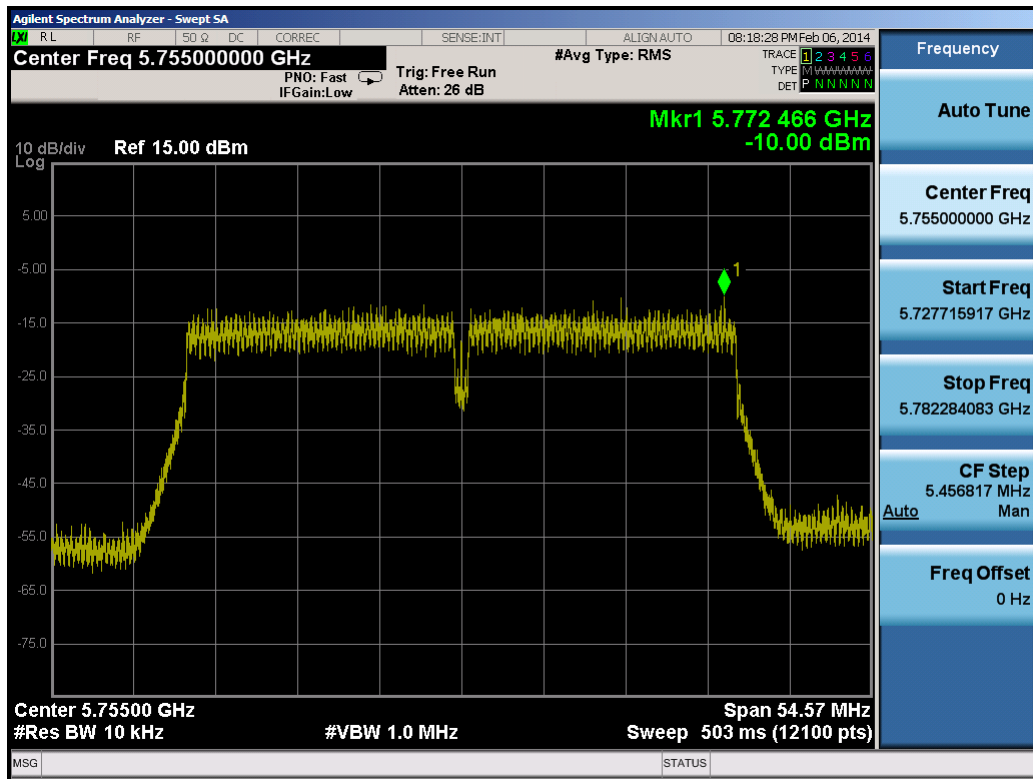


Plot 6-70. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 60 of 120

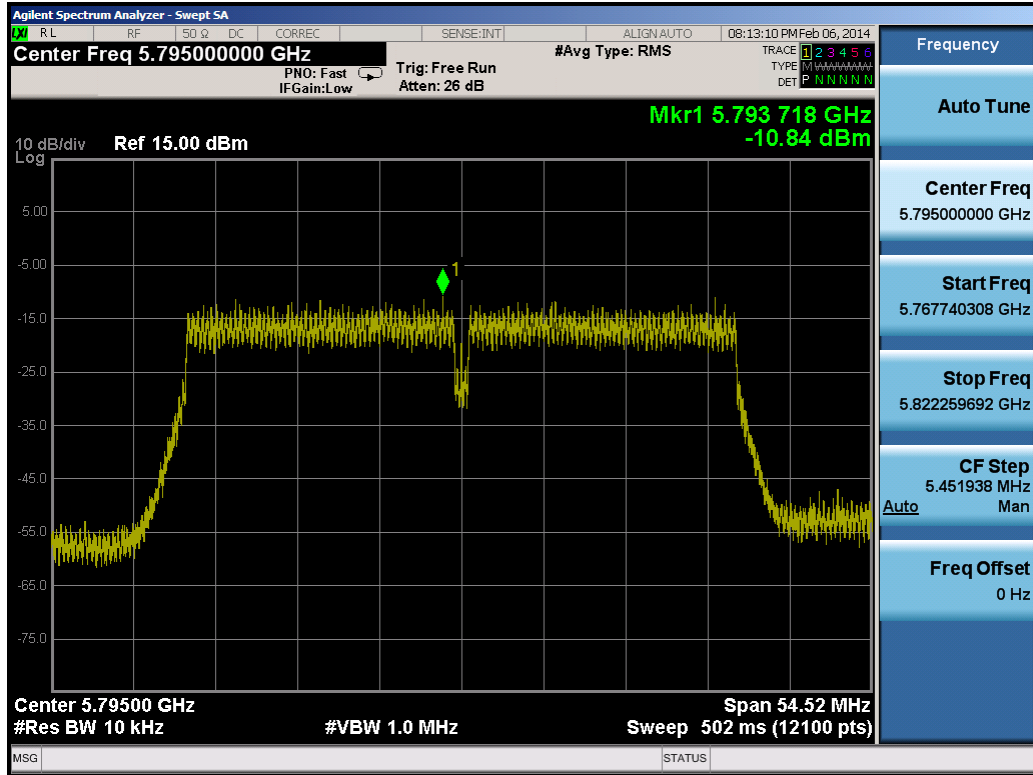

Plot 6-71. Power Spectral Density Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

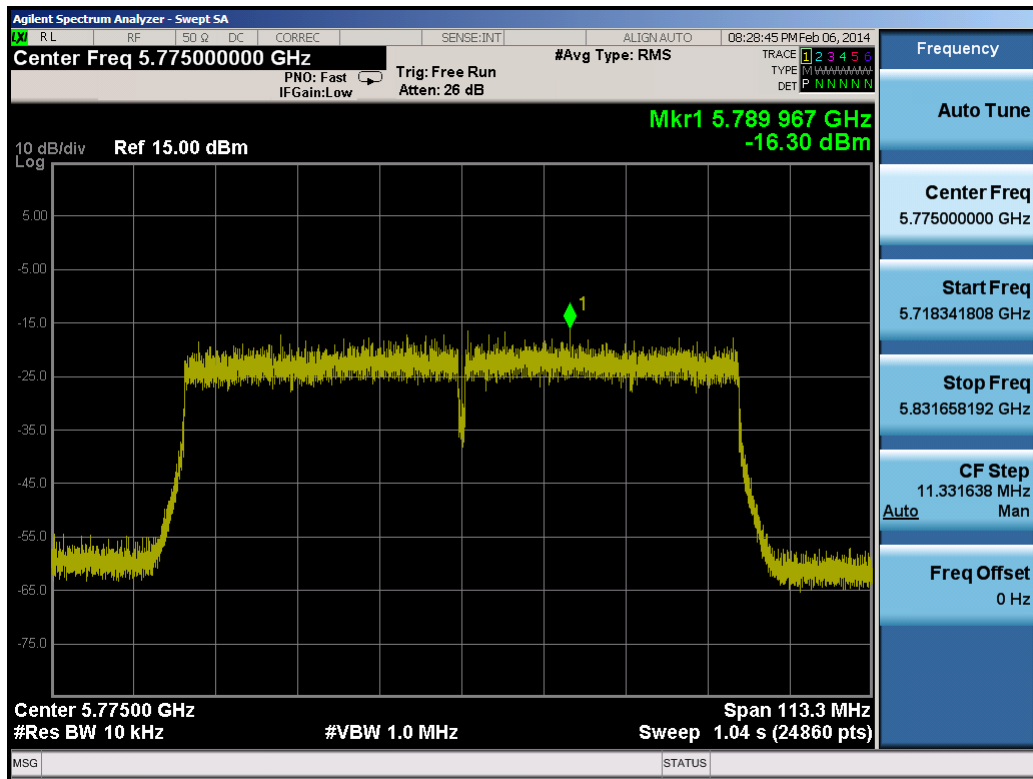



Plot 6-72. Power Spectral Density Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 61 of 120

## MIMO Power Spectral Density Measurements

Frequency [MHz]	Channel No.	802.11 Mode	Data Rate [Mbps]	Measured Power Spectral Density Antenna 1 [dBm]	Measured Power Spectral Density Antenna 2 [dBm]	Calculated Power Spectral Density Antenna 1&2 [dBm]	Maximum Permissible Power Density [dBm / 3kHz]	Margin [dB]	Pass / Fail
2412	1	b	1	0.98	0.97	3.99	8.000	-4.01	Pass
2437	6	b	1	0.63	-0.40	3.15	8.000	-4.85	Pass
2462	11	b	1	0.70	-0.86	3.00	8.000	-5.00	Pass
2412	1	g	6	-5.91	-6.04	-2.97	8.000	-10.97	Pass
2437	6	g	6	-5.74	-6.37	-3.03	8.000	-11.03	Pass
2462	11	g	6	-5.32	-5.36	-2.33	8.000	-10.33	Pass
2412	1	n	6.5/7.2 (MCS0)	-7.08	-8.71	-4.81	8.000	-12.81	Pass
2437	6	n	6.5/7.2 (MCS0)	-6.77	-8.04	-4.35	8.000	-12.35	Pass
2462	11	n	6.5/7.2 (MCS0)	-6.77	-8.59	-4.58	8.000	-12.58	Pass
5745	149	a	6	-8.54	-6.26	-4.24	8.000	-12.24	Pass
5785	157	a	6	-8.87	-5.46	-3.83	8.000	-11.83	Pass
5825	165	a	6	-9.26	-6.42	-4.60	8.000	-12.60	Pass
5745	149	n (20MHz)	6.5/7.2 (MCS0)	-9.04	-6.47	-4.56	8.000	-12.56	Pass
5785	157	n (20MHz)	6.5/7.2 (MCS0)	-8.11	-6.73	-4.35	8.000	-12.35	Pass
5825	165	n (20MHz)	6.5/7.2 (MCS0)	-7.09	-6.52	-3.78	8.000	-11.78	Pass
5755	151	n (40MHz)	13.5/15 (MCS0)	-10.00	-8.55	-6.20	8.000	-14.20	Pass
5795	159	n (40MHz)	13.5/15 (MCS0)	-10.84	-7.71	-5.99	8.000	-13.99	Pass
5775	155	ac (80MHz)	29.3/32.5 (MCS0)	-16.30	-14.68	-12.40	8.000	-20.40	Pass

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 62 of 120	

## 6.5 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots at the band edge, the EUT was set at a data rate of 1Mbps for “b” mode, 6 Mbps for “g” mode, 6 Mbps for “a” mode, 6.5/7.2Mbps for 20MHz BW “n” mode, 13.5/15Mbps for 40MHz “n”, and 29.3/32.5Mbps for 80MHz “ac” mode as these settings produced the worst-case emissions.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure (Section 9.1).***

### Test Procedure Used


KDB 558074 v03r01 – Section 11.3

### Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW = 100kHz
4. VBW = 1MHz
5. Detector = Peak
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

### Test Setup



The EUT and measurement equipment were set up as shown in the diagram below.




**Figure 6-5. Test Instrument & Measurement Setup**

### Test Notes


None

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 63 of 120	

### Antenna-1 Conducted Emissions at the Band Edge §15.247(d); RSS-210 [A8.5]

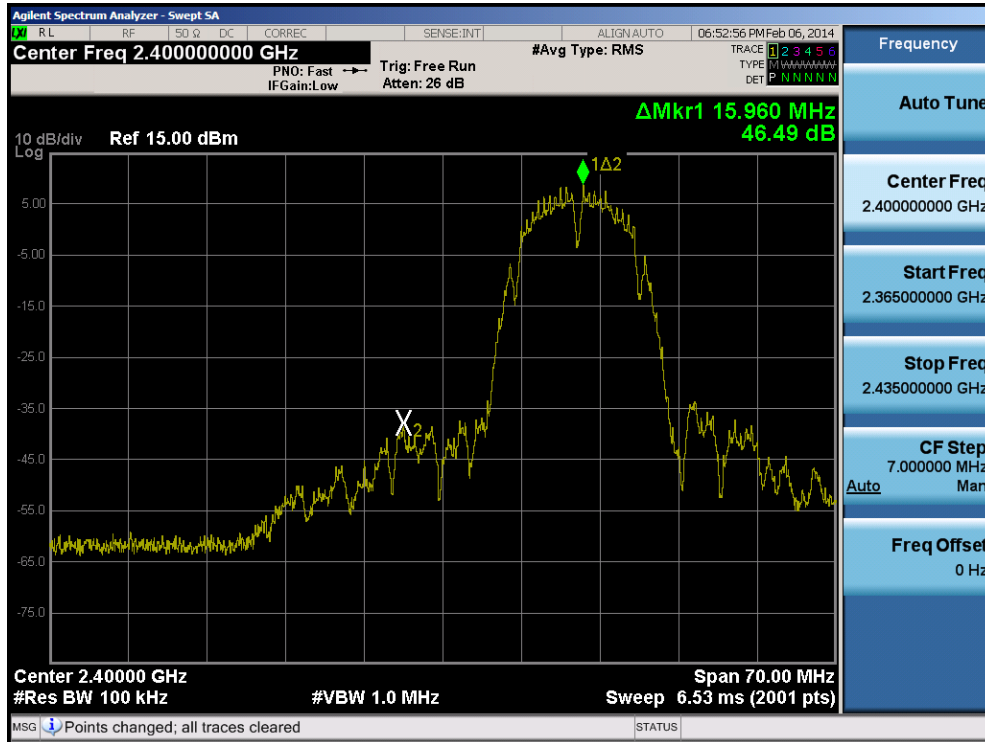


Plot 6-73. Band Edge Plot (802.11b – Ch. 1)

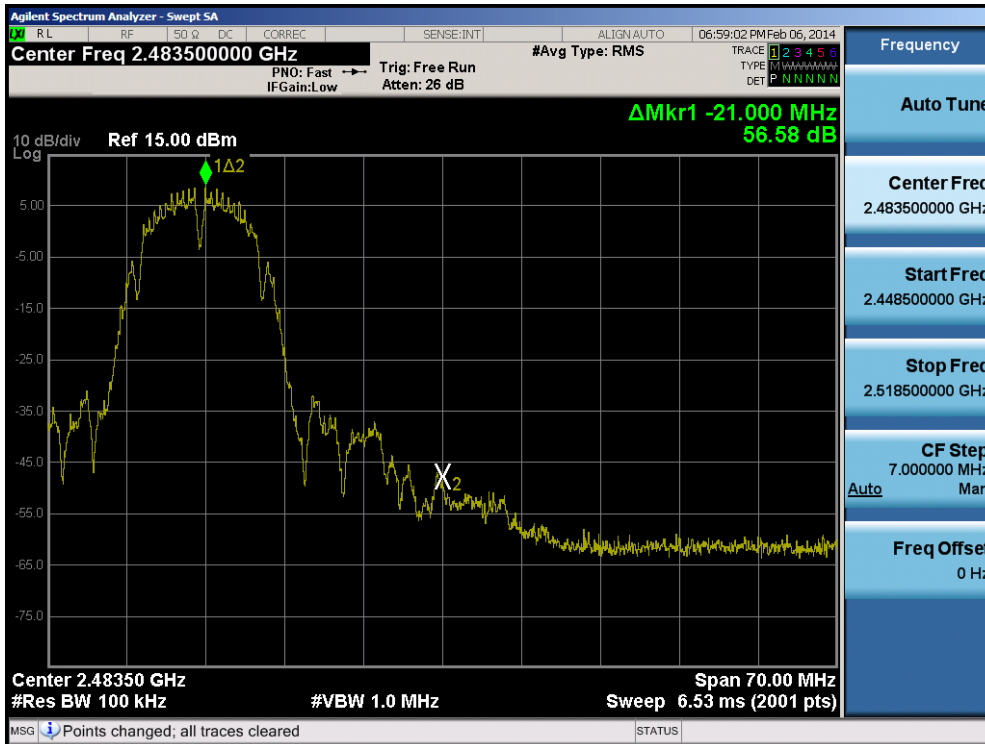


Plot 6-74. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 64 of 120

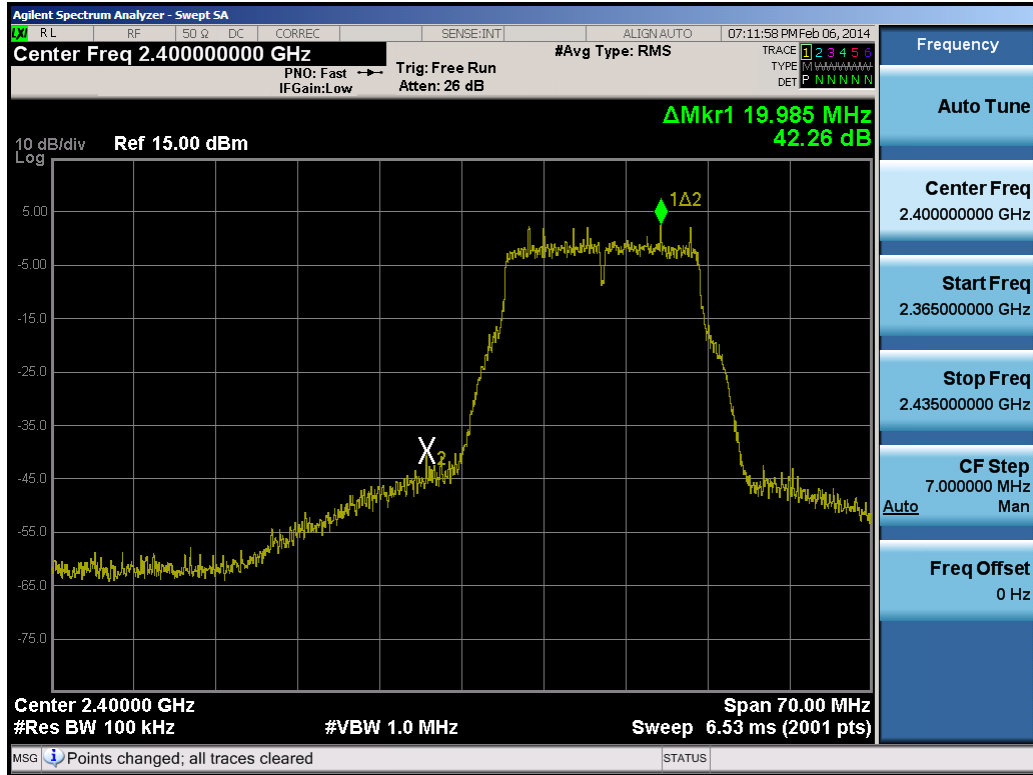


Plot 6-75. Band Edge Plot (802.11g- Ch. 1)

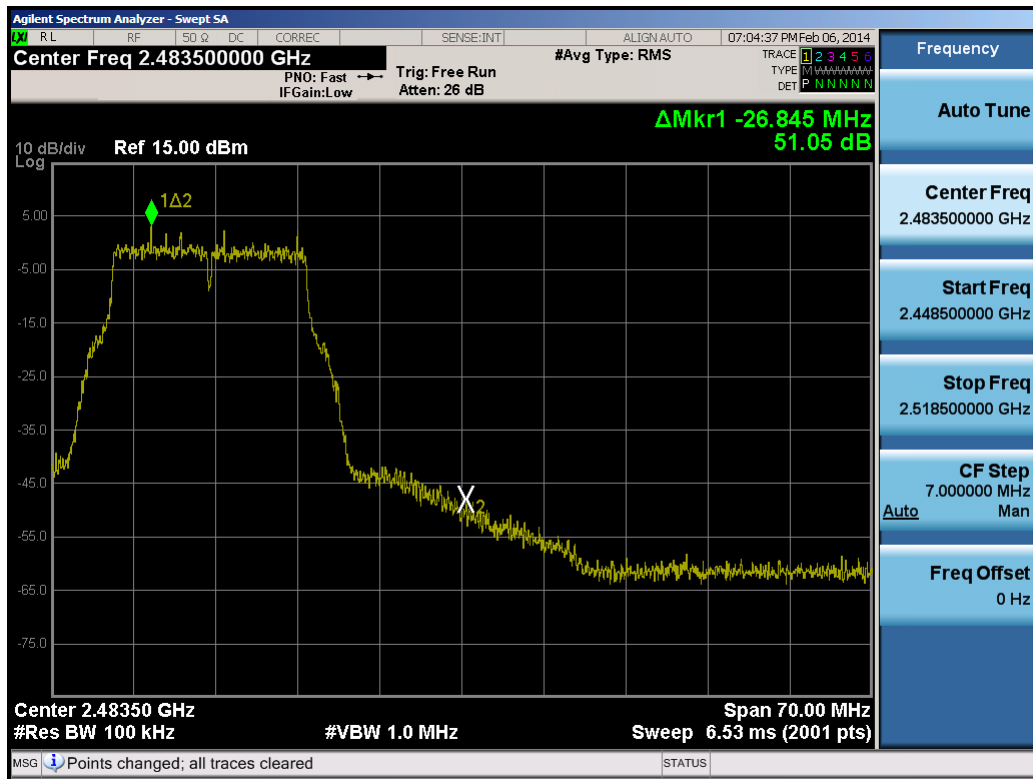


Plot 6-76. Band Edge Plot (802.11g - Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 65 of 120

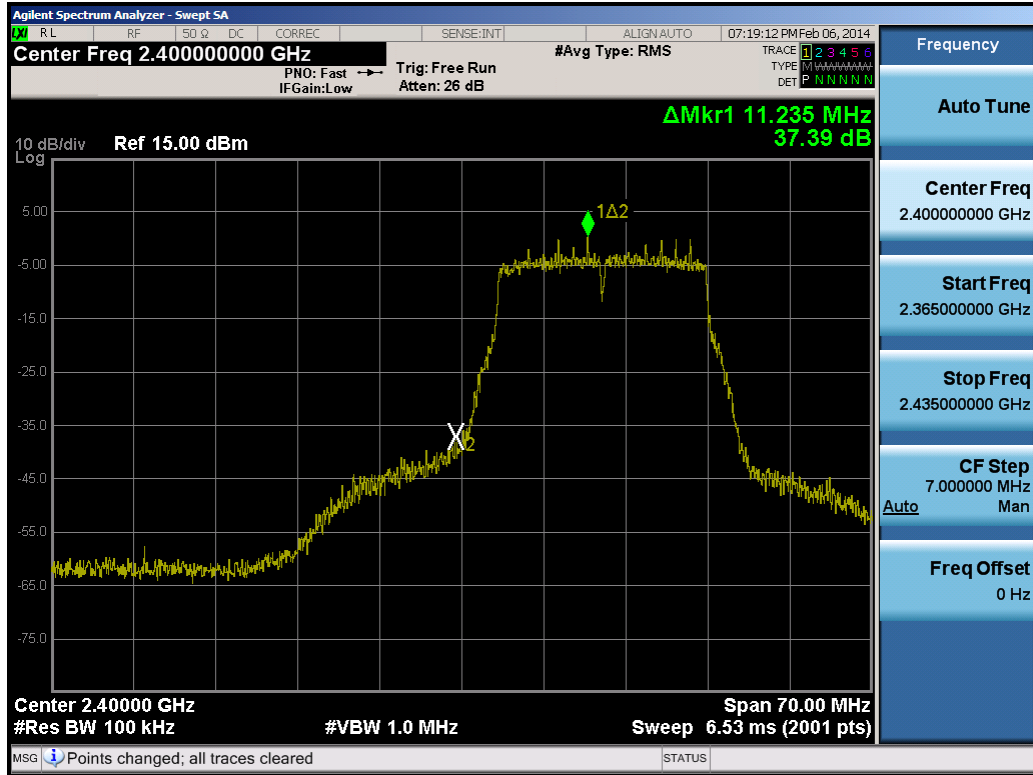


Plot 6-77. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

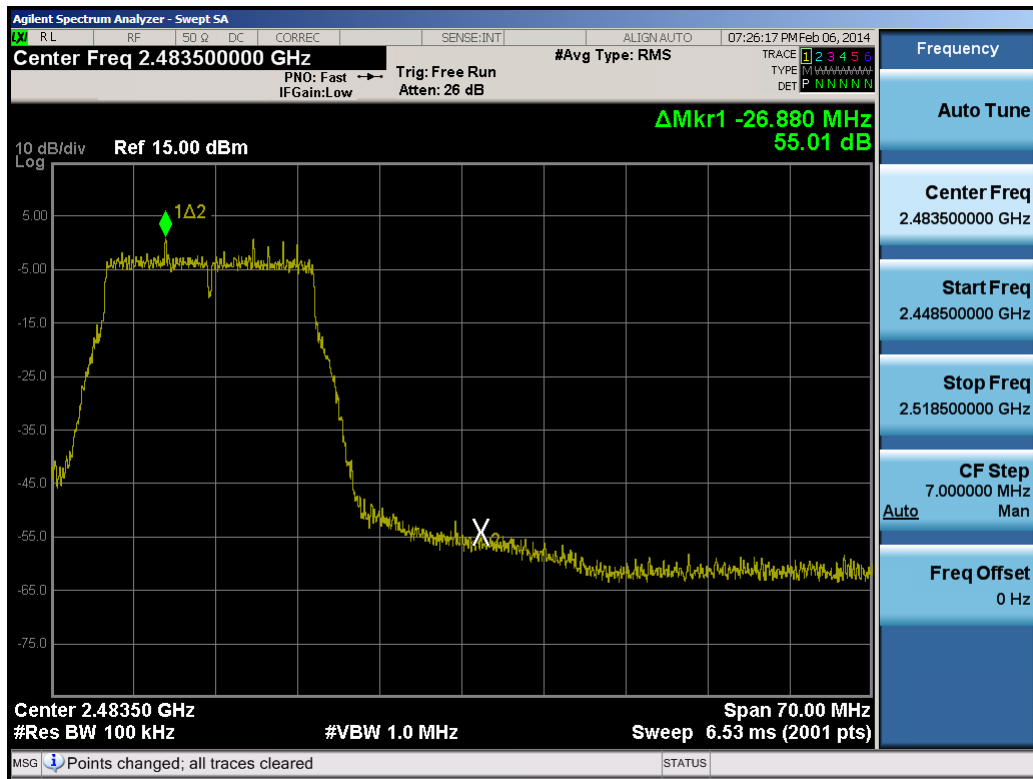


Plot 6-78. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 66 of 120

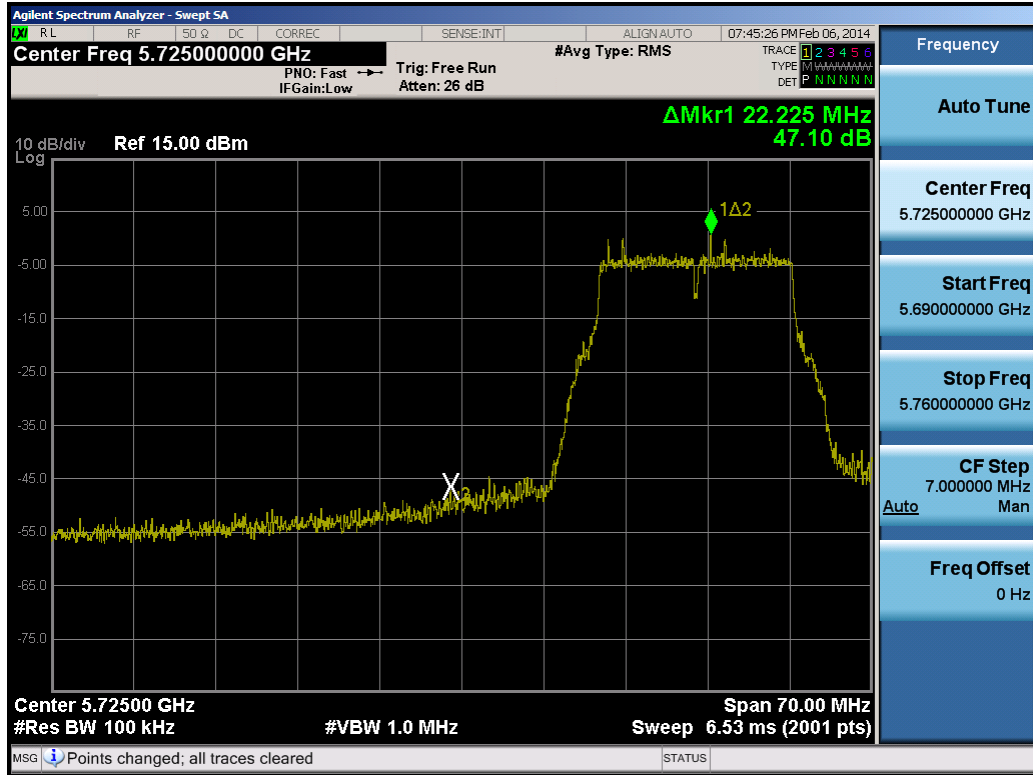


Plot 6-79. Band Edge Plot (802.11a – Ch. 149)

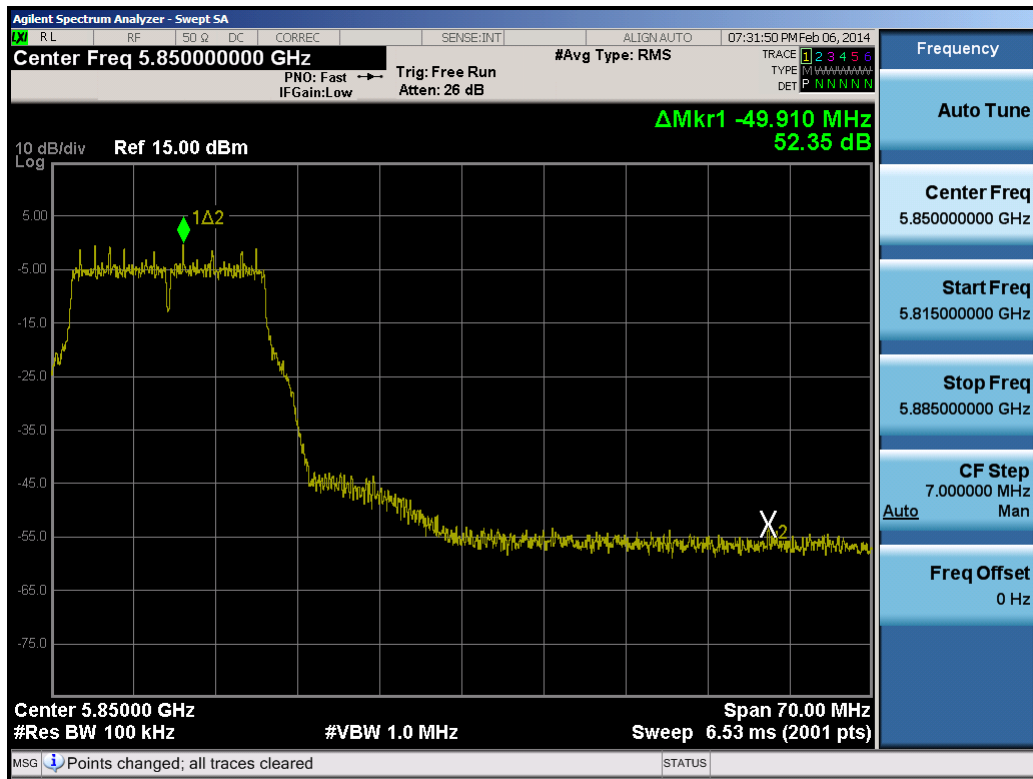


Plot 6-80. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 67 of 120

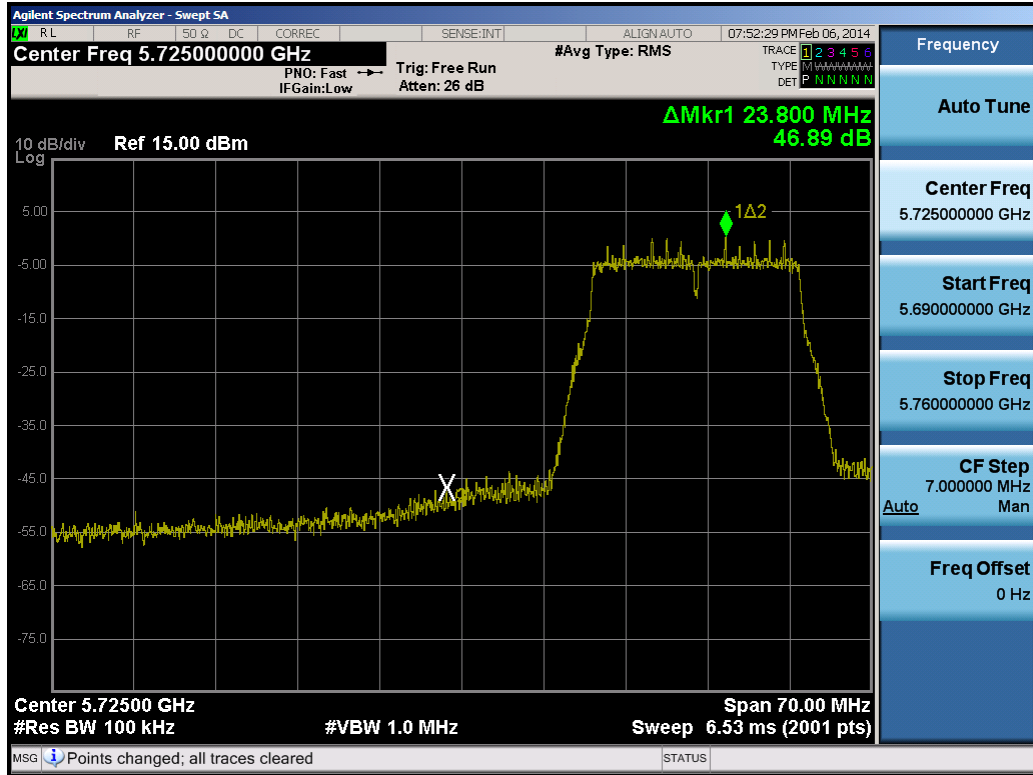


Plot 6-81. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

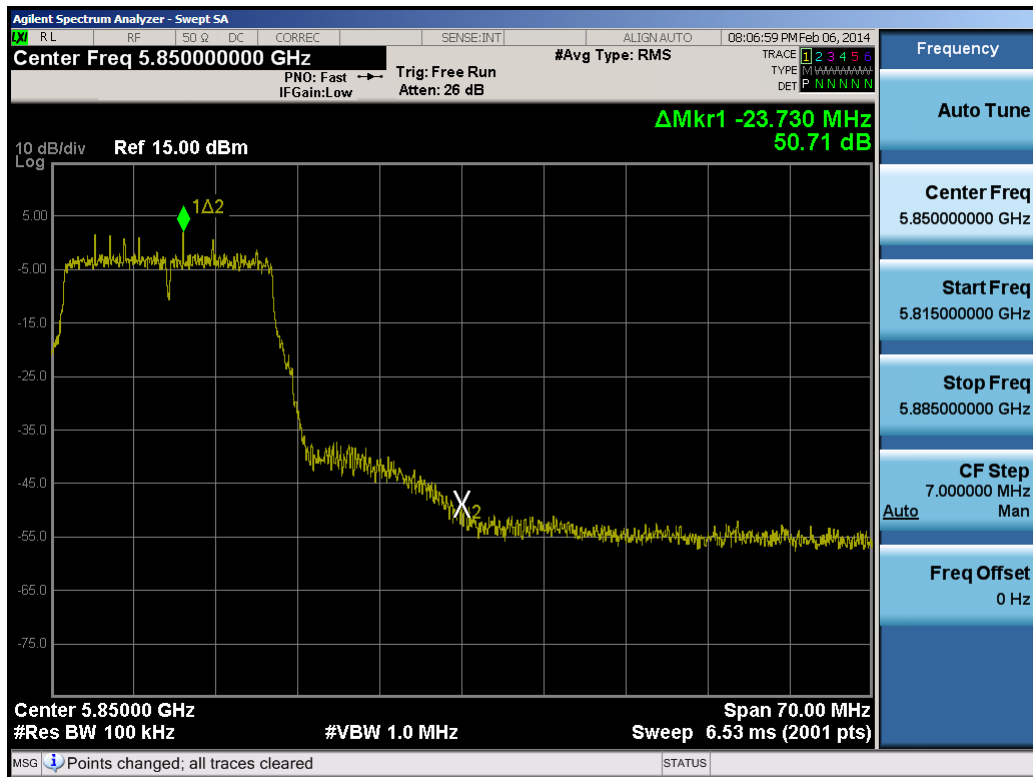


Plot 6-82. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 68 of 120

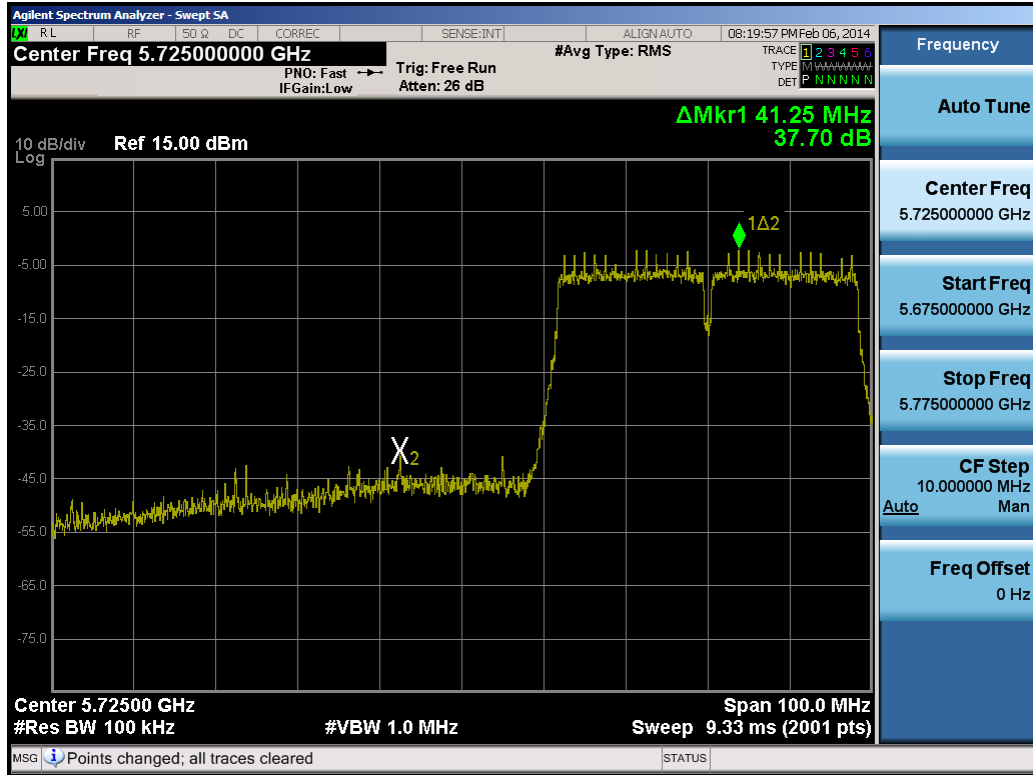


Plot 6-83. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

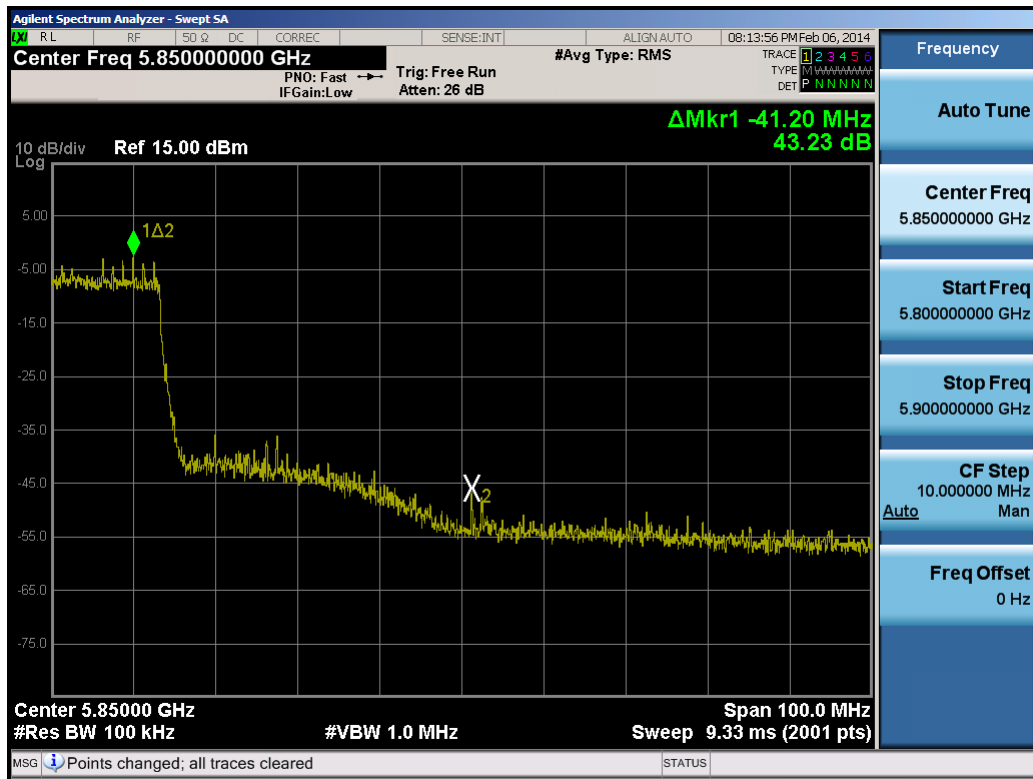


Plot 6-84. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 69 of 120

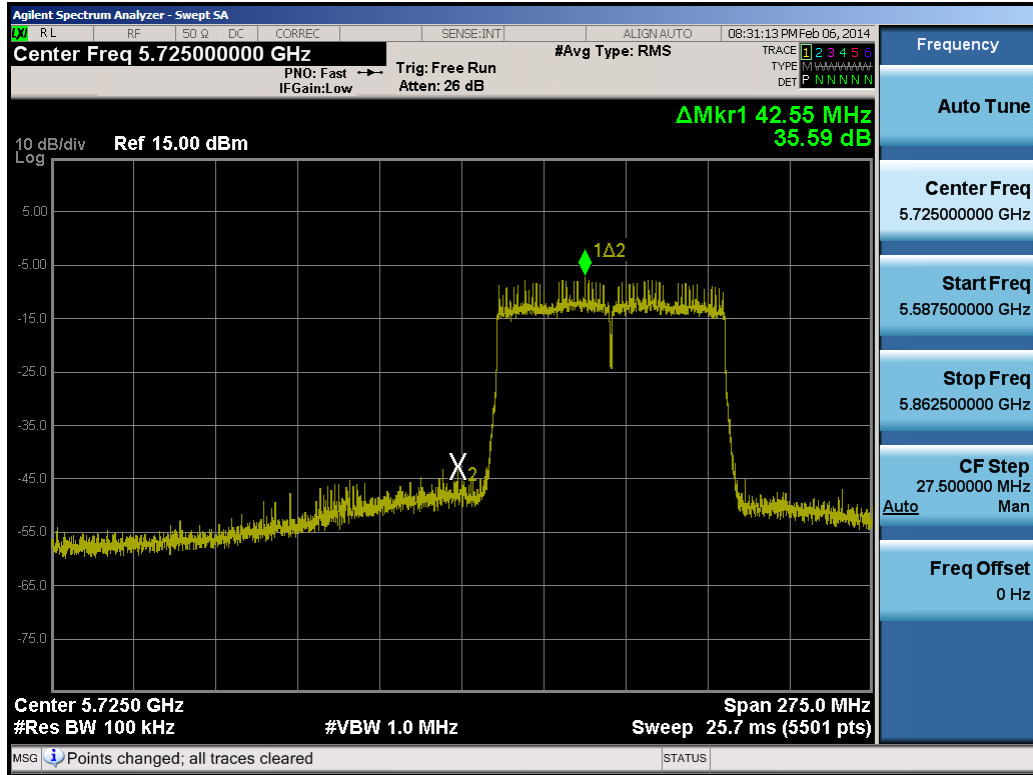

Plot 6-85. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

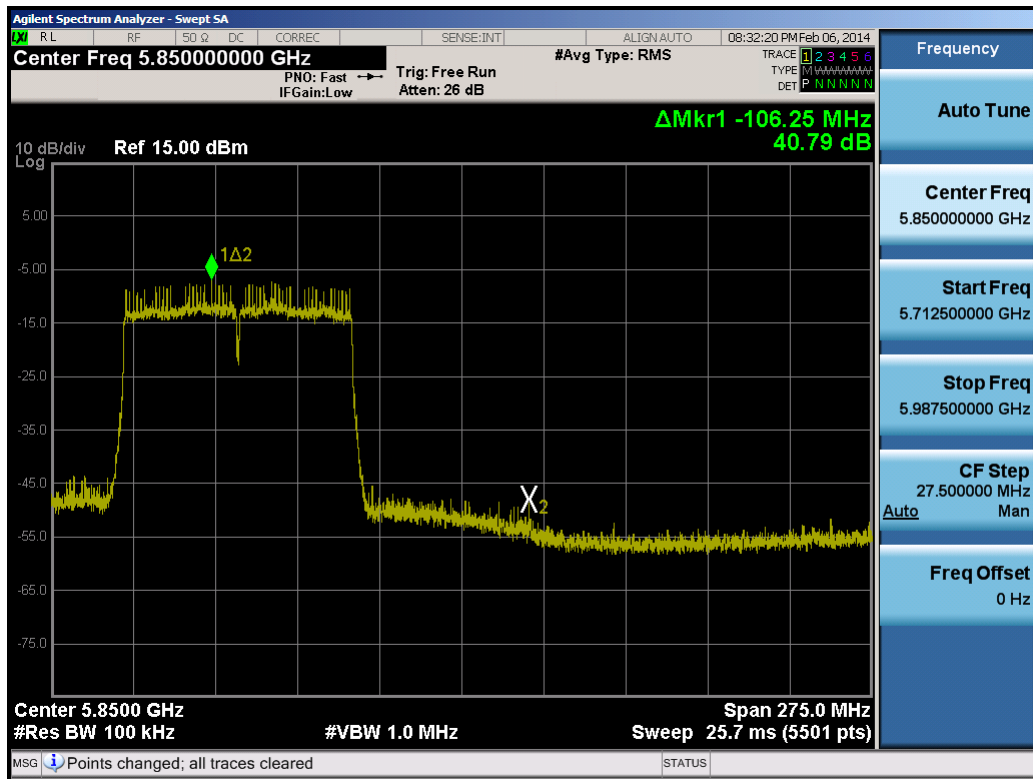


Plot 6-86. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 70 of 120

# Antenna-2 Conducted Emissions at the Band Edge

§15.247(d); RSS-210 [A8.5]

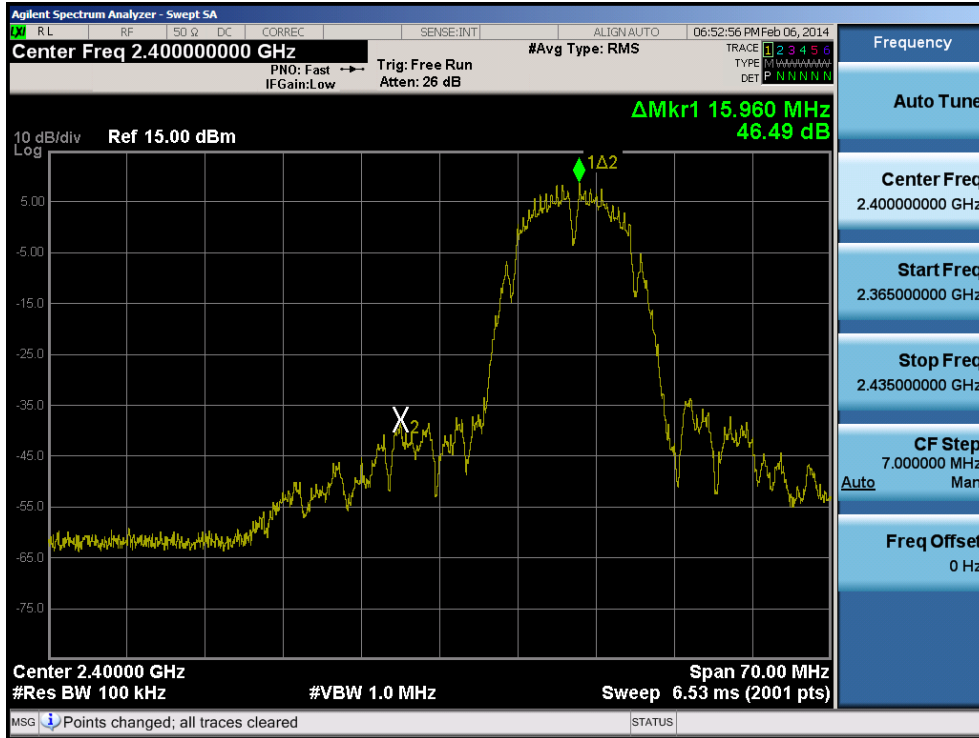


Plot 6-87. Band Edge Plot (802.11b – Ch. 1)

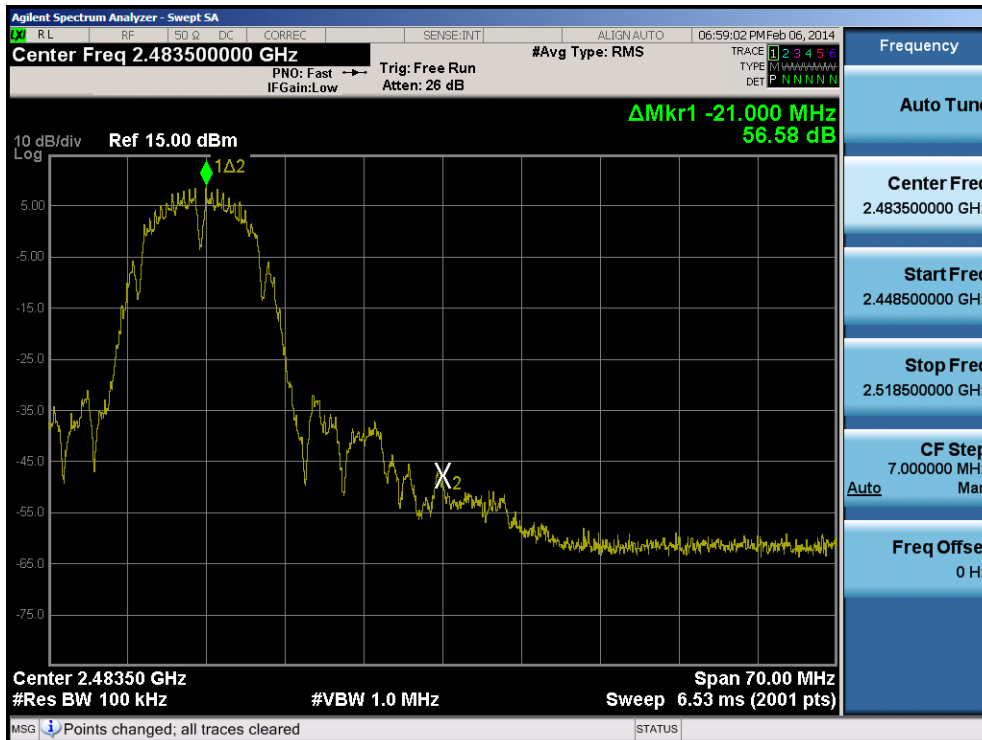


Plot 6-88. Band Edge Plot (802.11b – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 71 of 120

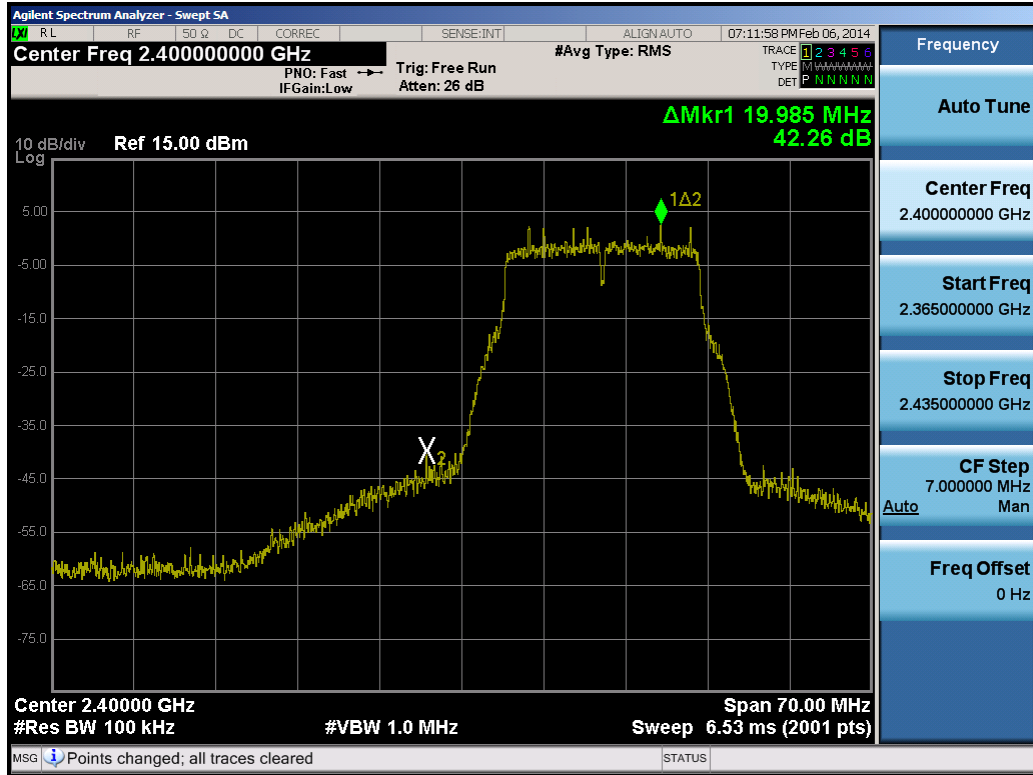


Plot 6-89. Band Edge Plot (802.11g– Ch. 1)

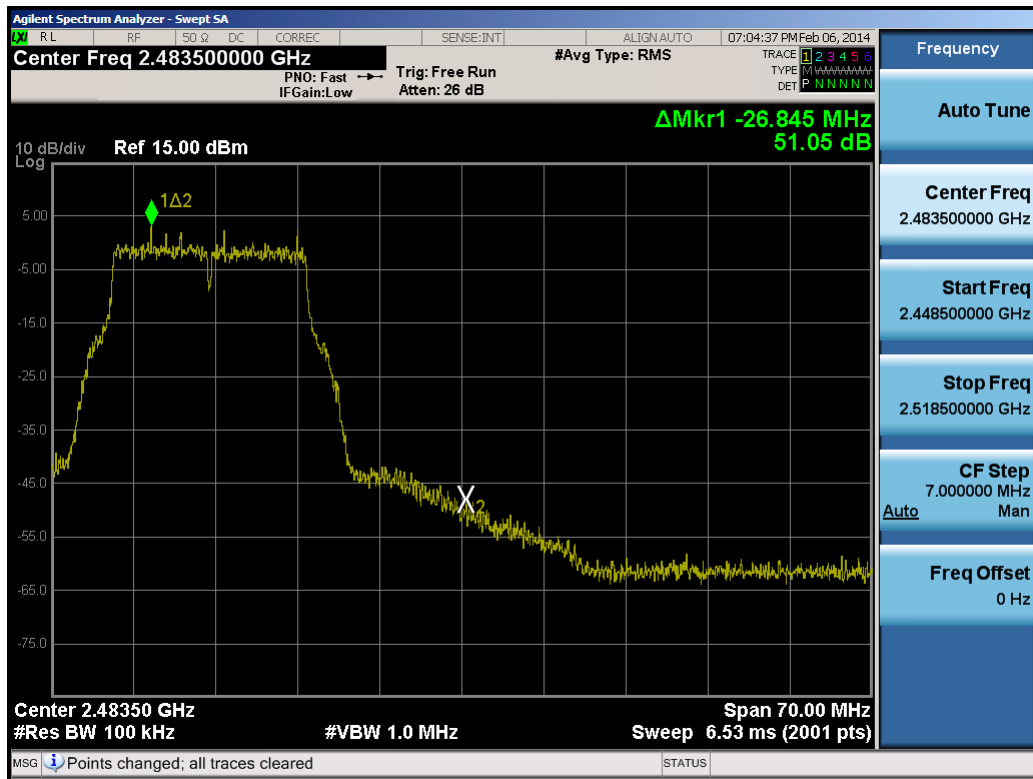


Plot 6-90. Band Edge Plot (802.11g – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 72 of 120

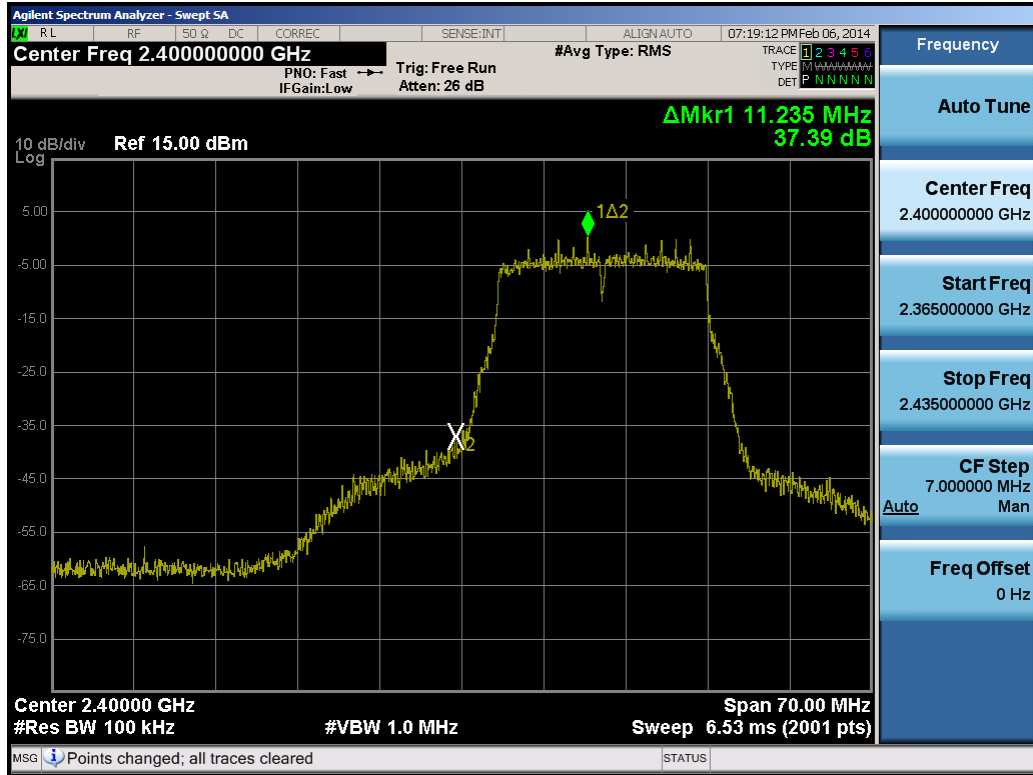


Plot 6-91. Band Edge Plot (802.11n (2.4GHz) – Ch. 1)

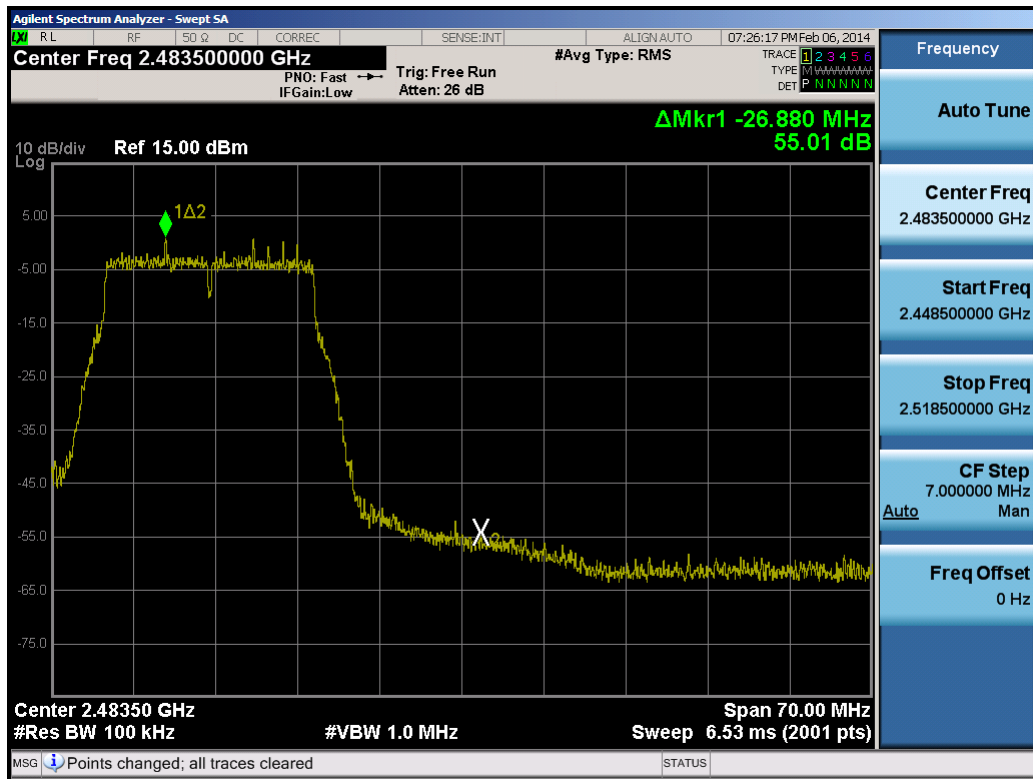


Plot 6-92. Band Edge Plot (802.11n (2.4GHz) – Ch. 11)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 73 of 120

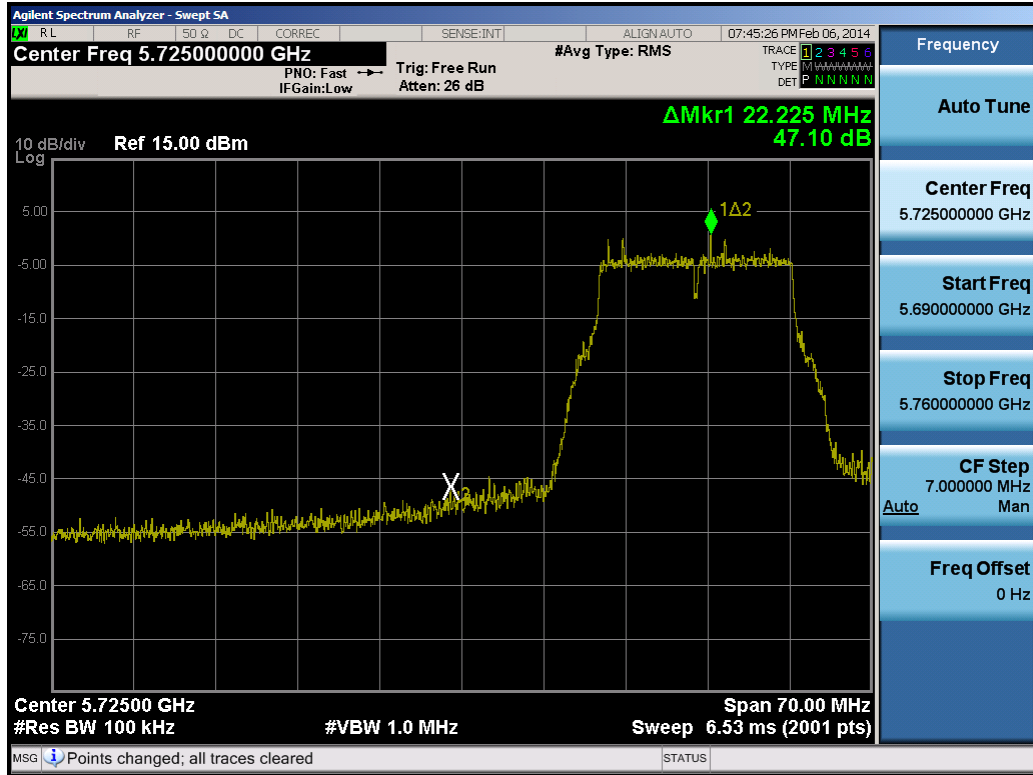


Plot 6-93. Band Edge Plot (802.11a – Ch. 149)

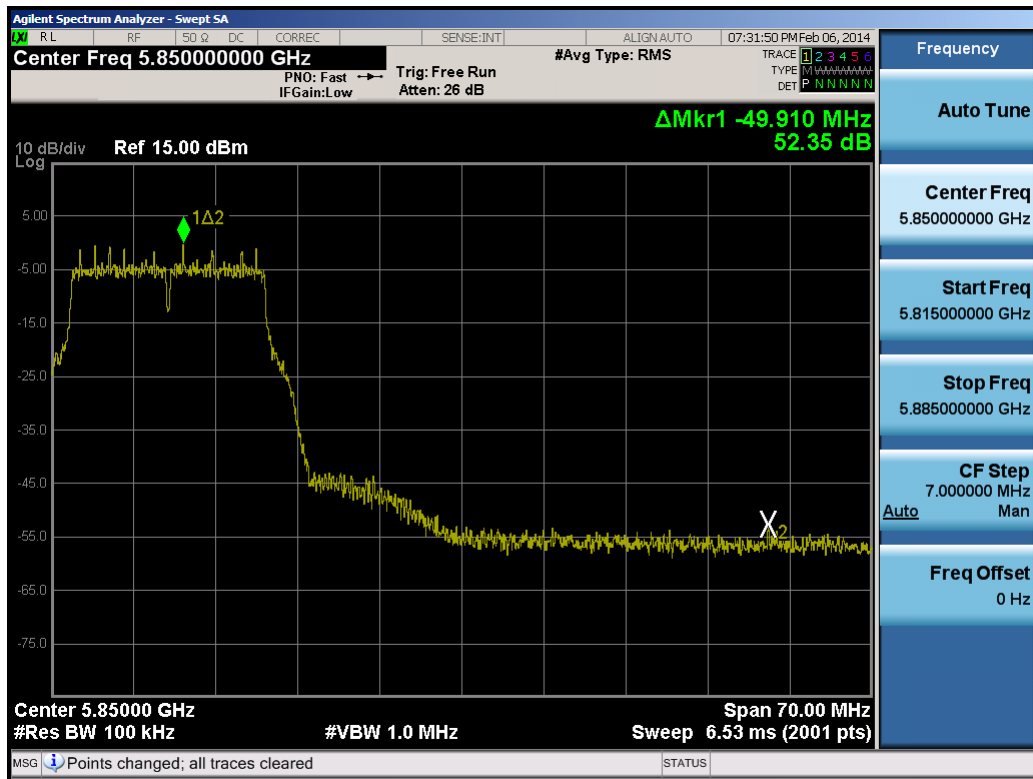


Plot 6-94. Band Edge Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 74 of 120

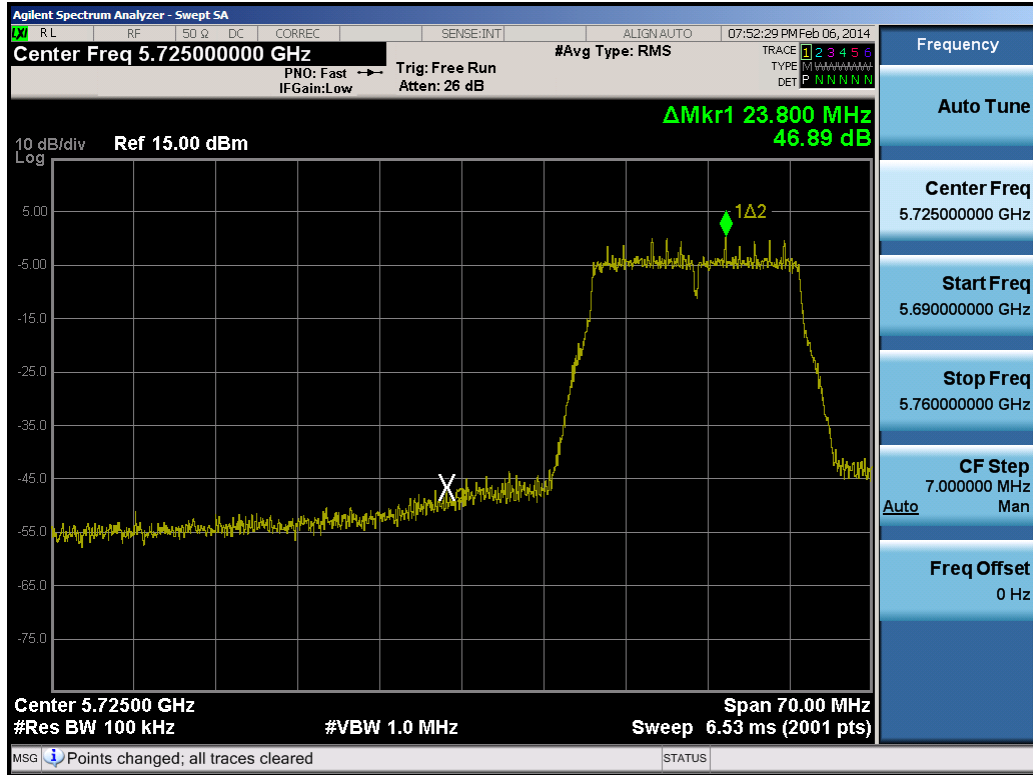


Plot 6-95. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 149)

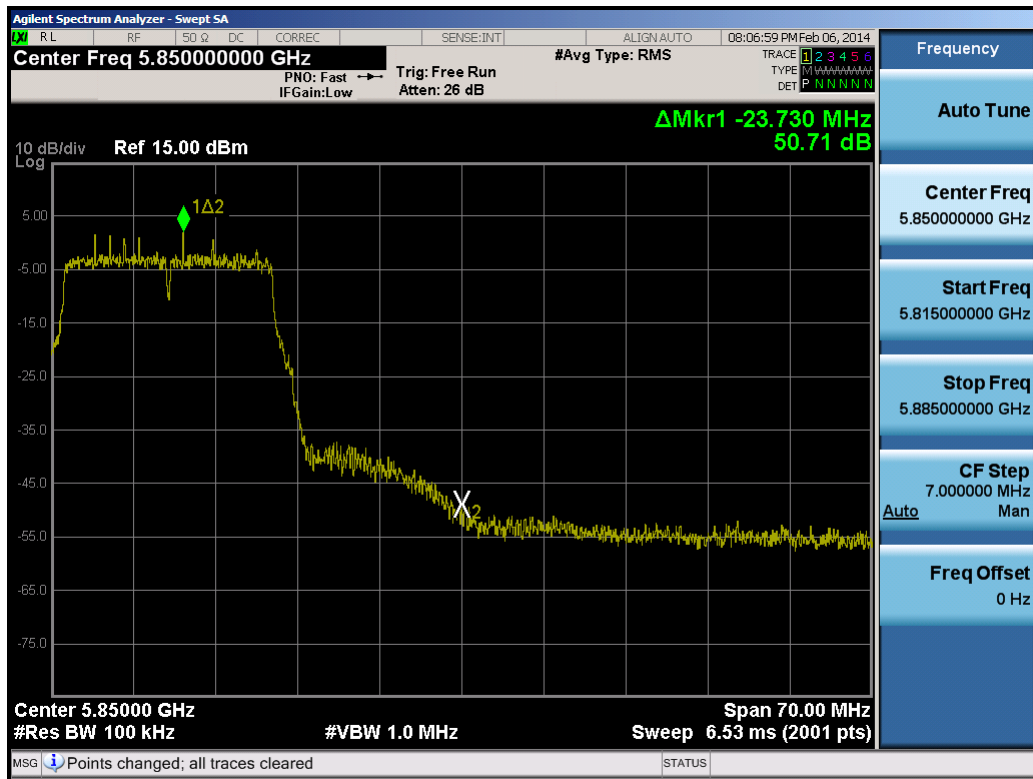


Plot 6-96. Band Edge Plot (20MHz BW 802.11n (5.8GHz) – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 75 of 120

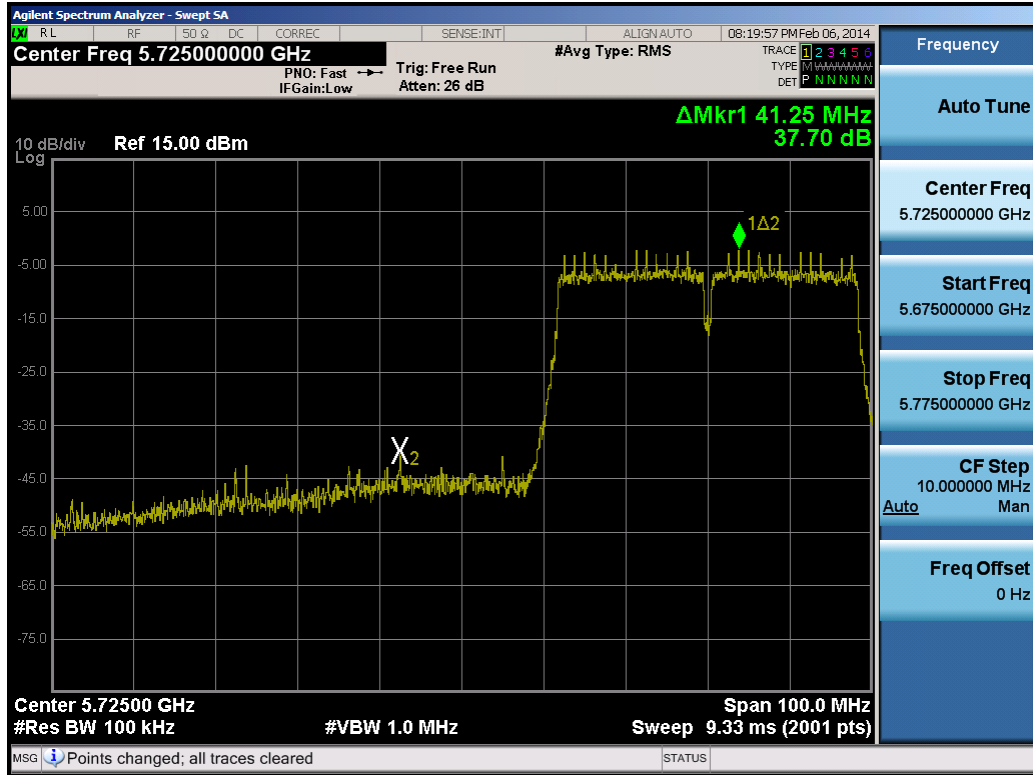


Plot 6-97. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 151)

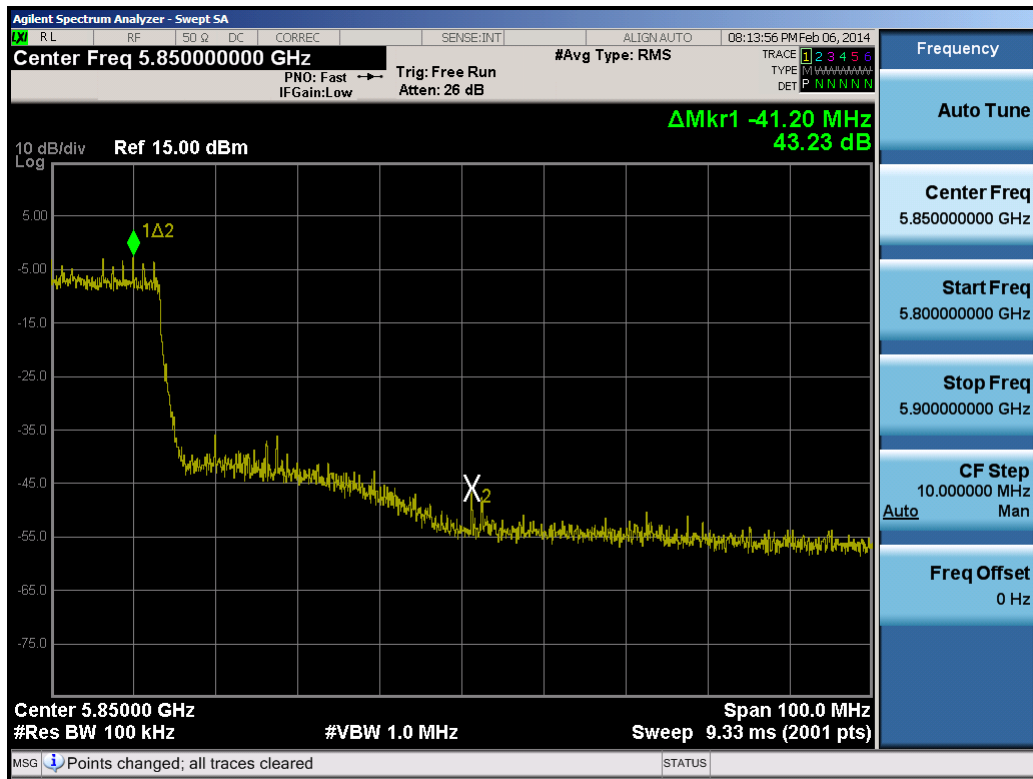


Plot 6-98. Band Edge Plot (40MHz BW 802.11n (5.8GHz) – Ch. 159)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 76 of 120

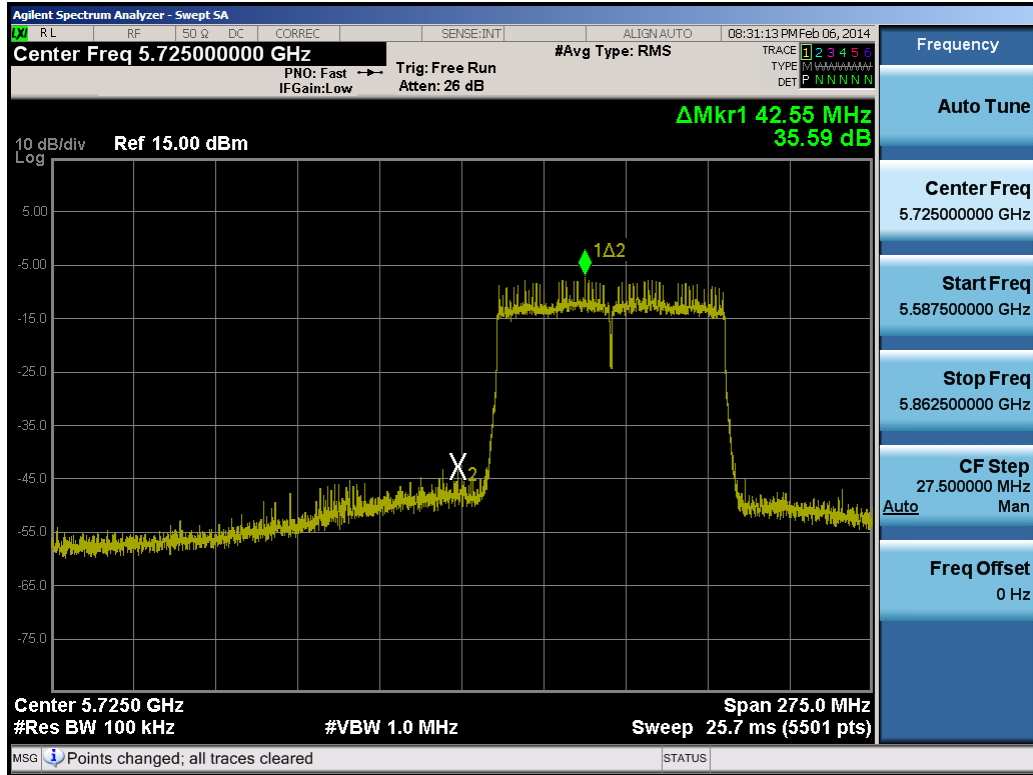

Plot 6-99. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

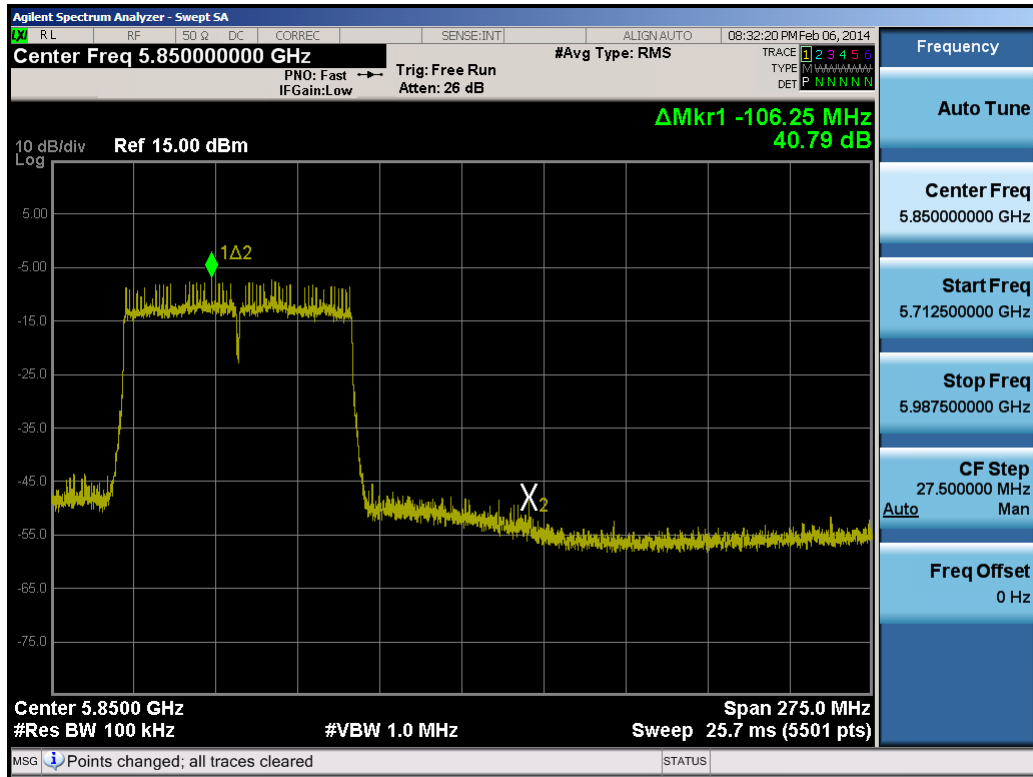

Plot 6-100. Band Edge Plot (80MHz BW 802.11ac (5.8GHz) – Ch. 155)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 77 of 120

## 6.6 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

### Test Overview and Limit

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. For the following out of band conducted spurious emissions plots, the EUT was investigated in all available data rates for “b”, “g”, “a”, “n”, and “ac” modes. The worst case spurious emissions for the 2.4GHz band were found while transmitting in “b” mode at 1 Mbps and are shown in the plots below. The worst case spurious emissions for the 5.8GHz band were found while transmitting in “a” mode at 6 Mbps and are shown in the plots below.

***The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the procedure in Section 11.1 of KDB 558074 v03r01.***

### Test Procedure Used


KDB 558074 v03r01 – Section 11.3

### Test Settings



1. Start frequency was set to 30MHz and stop frequency was set to 20GHz for 2.4GHz bands and 40GHz for 5GHz bands (separated into two plots per channel).
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

### Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.





**Figure 6-6. Test Instrument & Measurement Setup**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 78 of 120	


**Test Notes**

1. RBW was set to 1MHz rather than 100kHz in order to increase the measurement speed.
2. The display line shown in the following plots denotes the limit at 30dB below the fundamental emission level measured in a 100kHz bandwidth. However, since the traces in the following plots are measured with a 1MHz RBW, the display line may not necessarily appear to be 30dB below the level of the fundamental in a 1MHz bandwidth.
3. For plots showing conducted spurious emissions near the limit, the frequencies were investigated with a reduced RBW to ensure that no emissions were present.


<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset		Page 79 of 120

# Antenna-1 Conducted Spurious Emissions

§15.247(d); RSS-210 [A8.5]

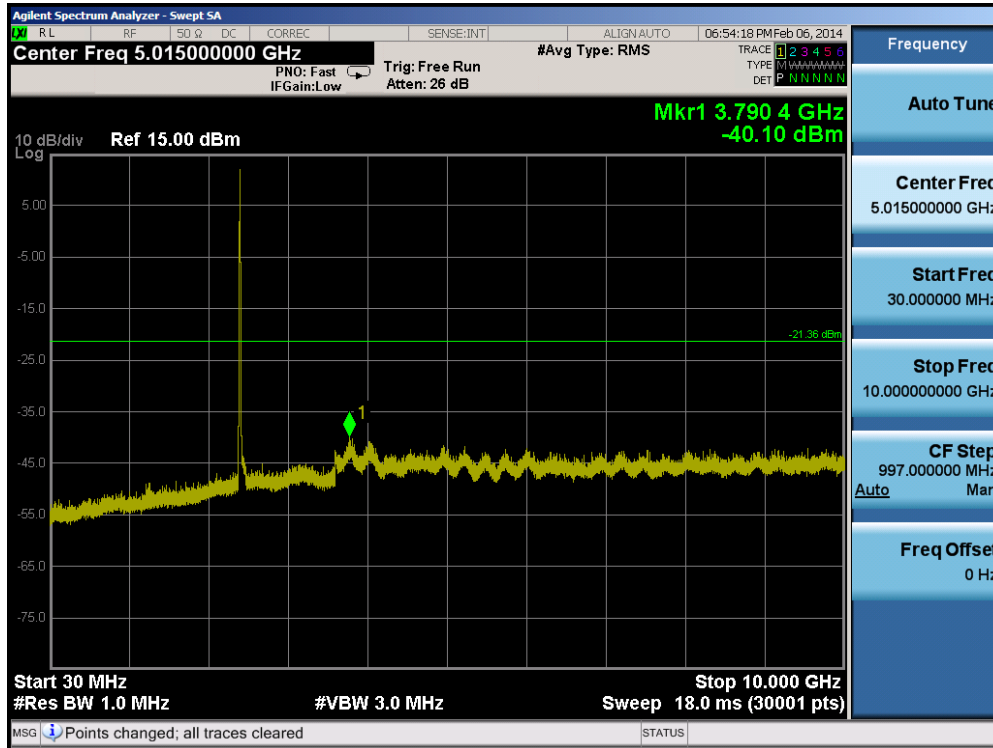


Plot 6-101. Conducted Spurious Plot (802.11b – Ch. 1)

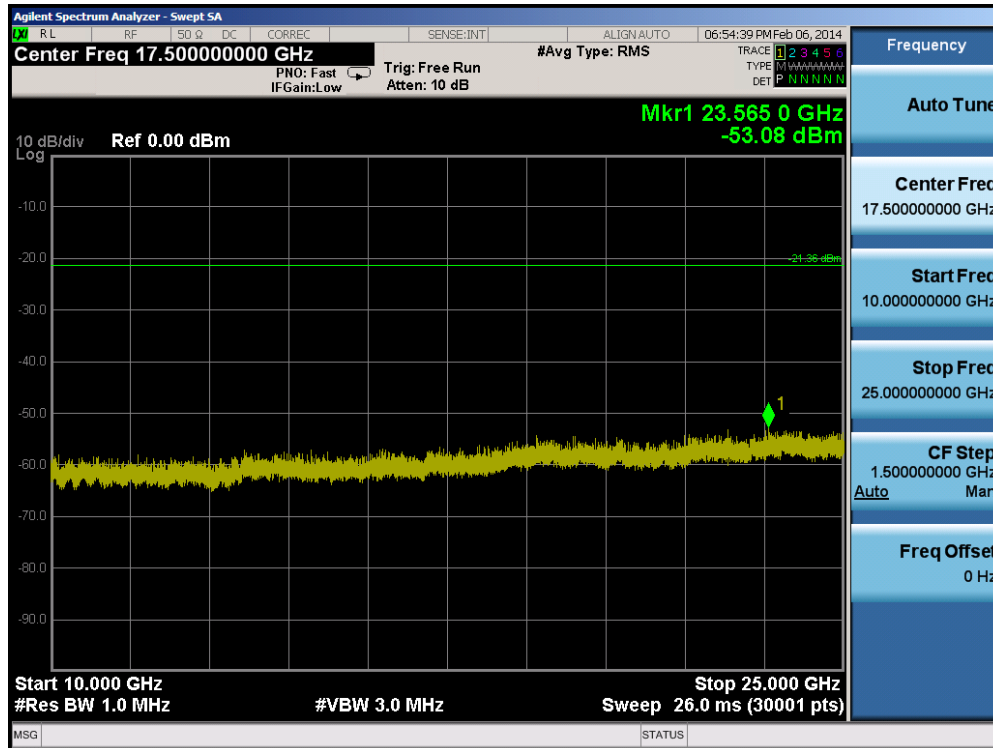


Plot 6-102. Conducted Spurious Plot (802.11b – Ch. 1)

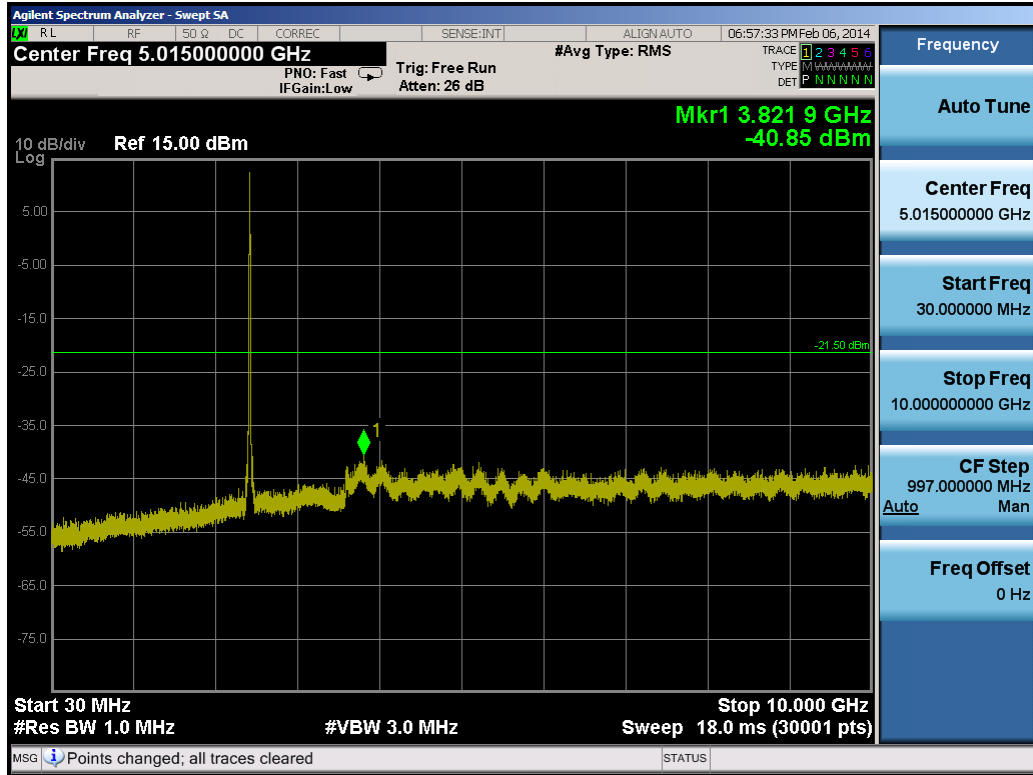

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 80 of 120

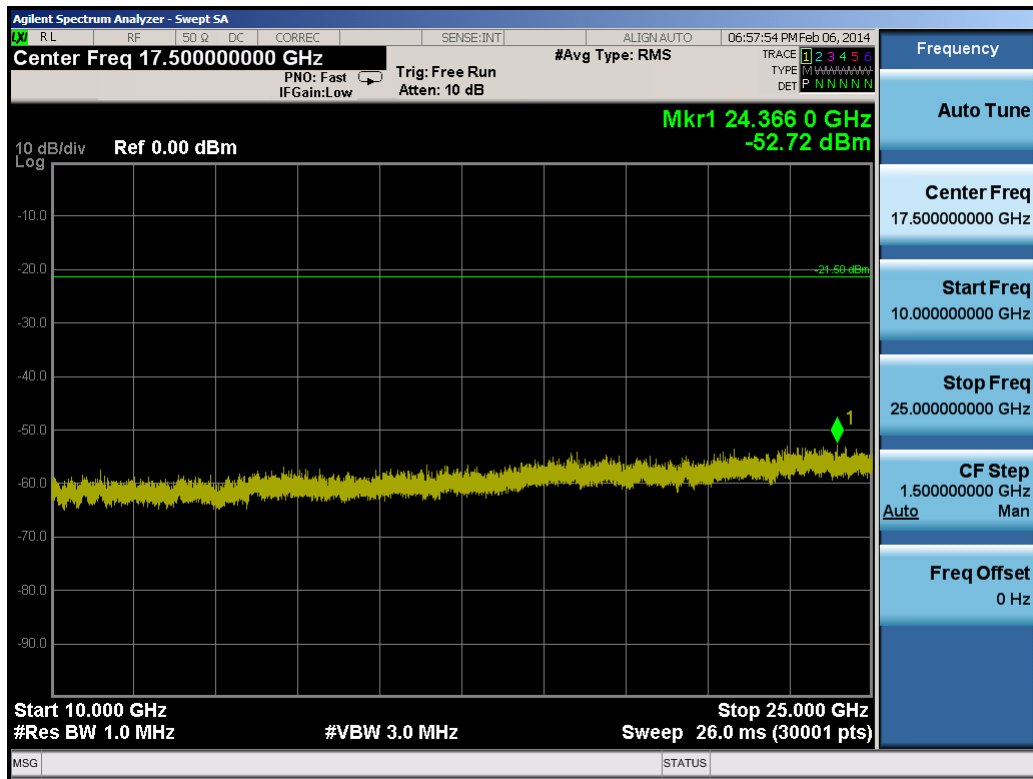


Plot 6-103. Conducted Spurious Plot (802.11b – Ch. 6)




Plot 6-104. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 81 of 120

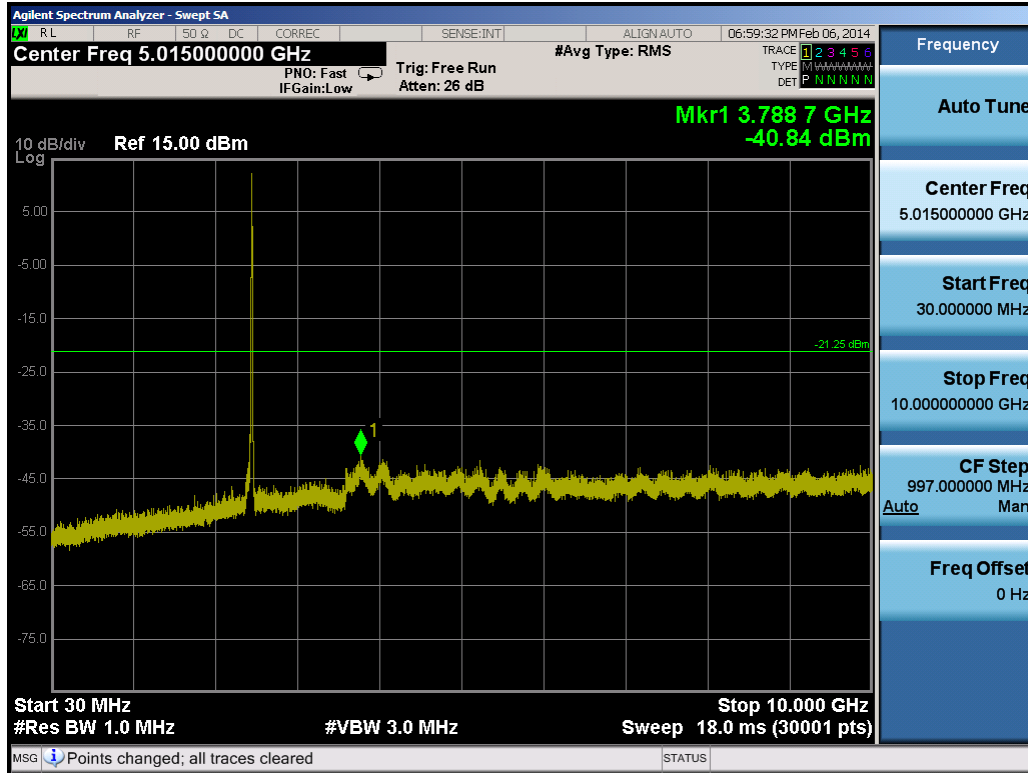


Plot 6-105. Conducted Spurious Plot (802.11b – Ch. 11)

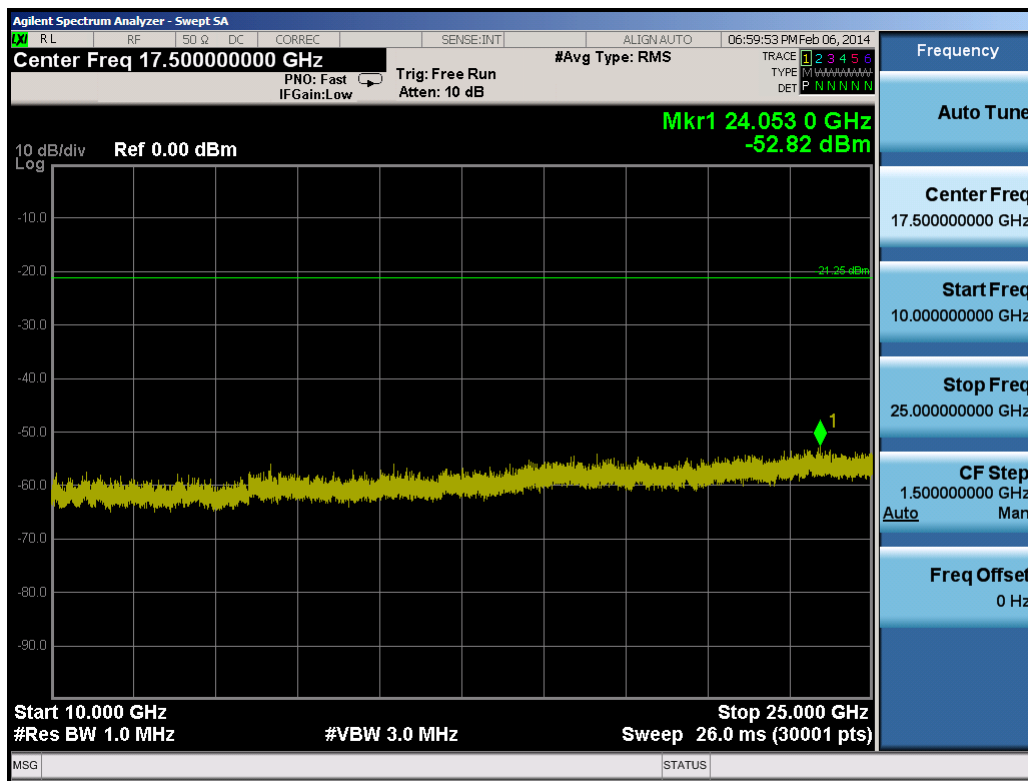


Plot 6-106. Conducted Spurious Plot (802.11b – Ch. 11)

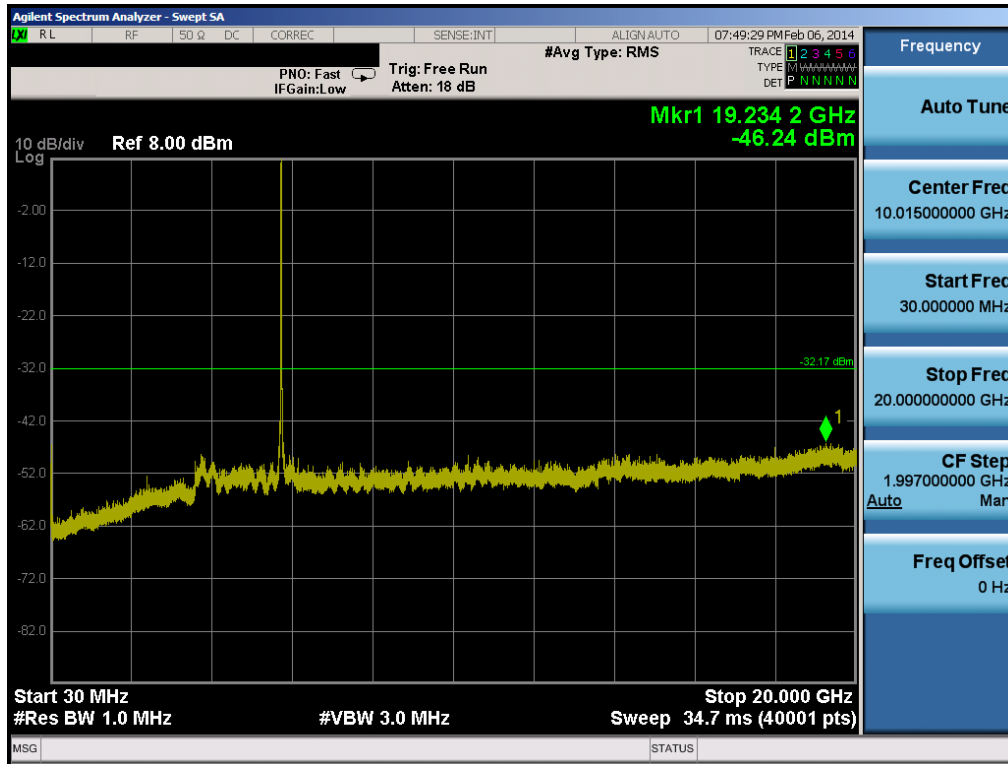

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 82 of 120

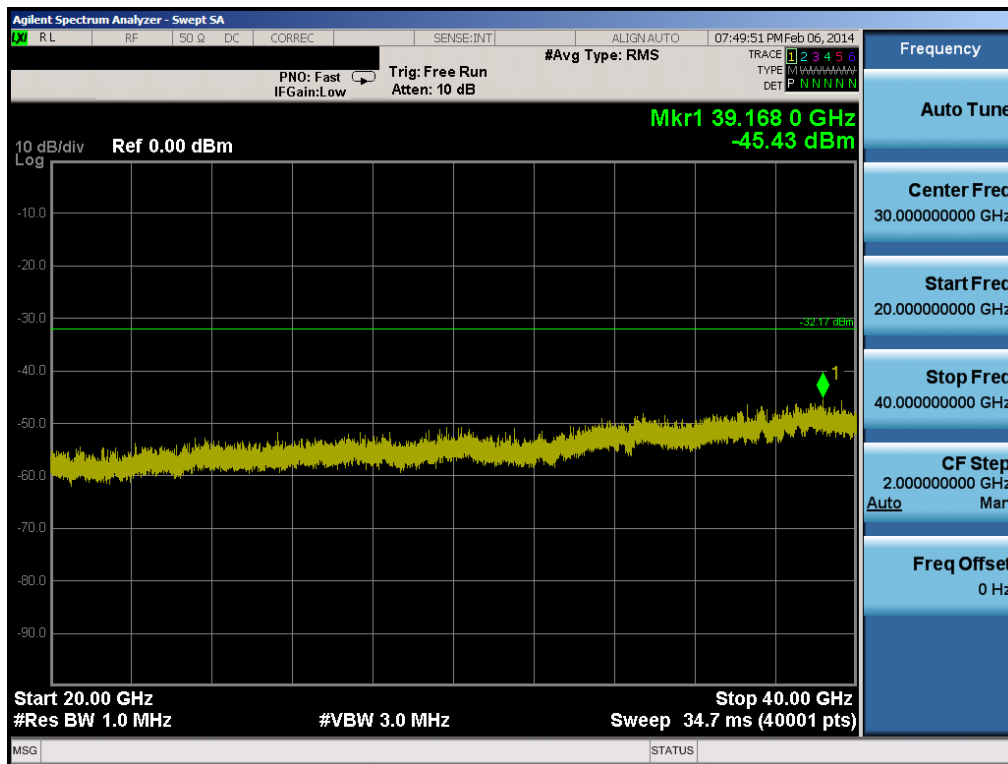


Plot 6-107. Conducted Spurious Plot (802.11a – Ch. 149)




Plot 6-108. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 83 of 120

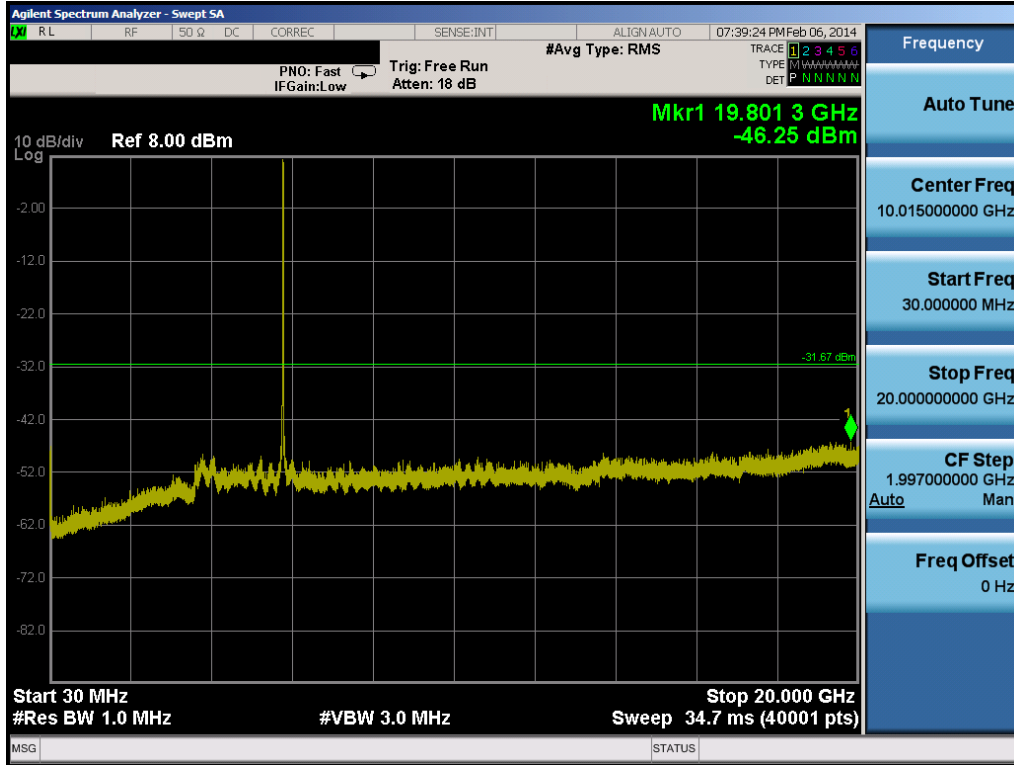


Plot 6-109. Conducted Spurious Plot (802.11a – Ch. 157)

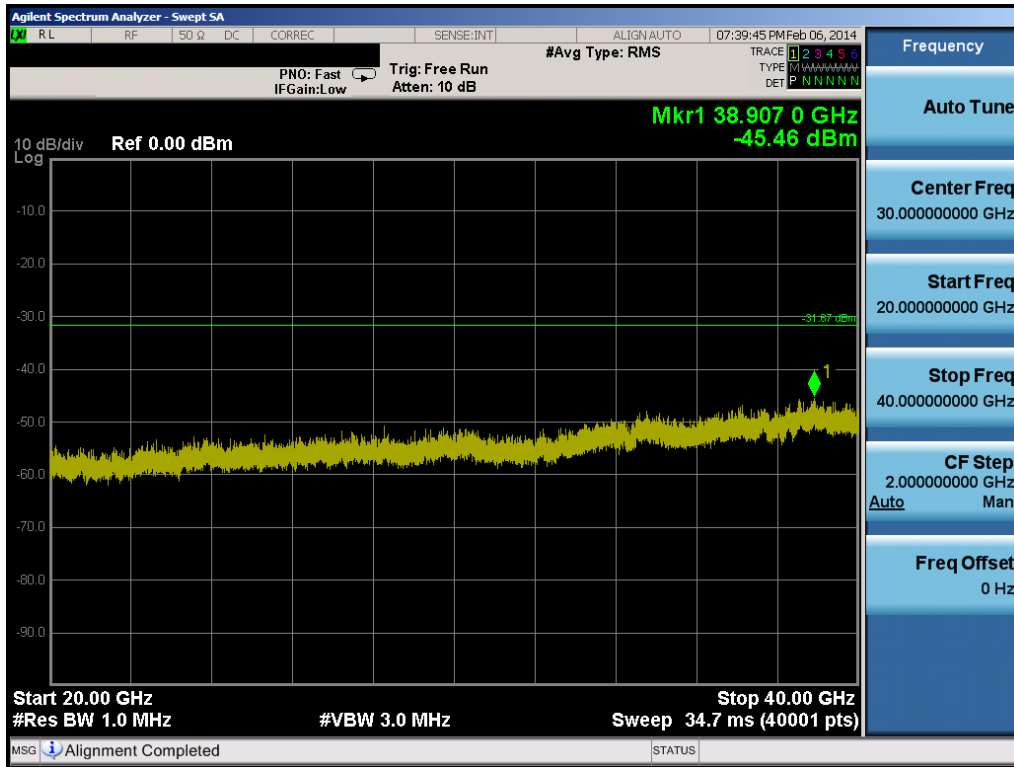


Plot 6-110. Conducted Spurious Plot (802.11a – Ch. 157)

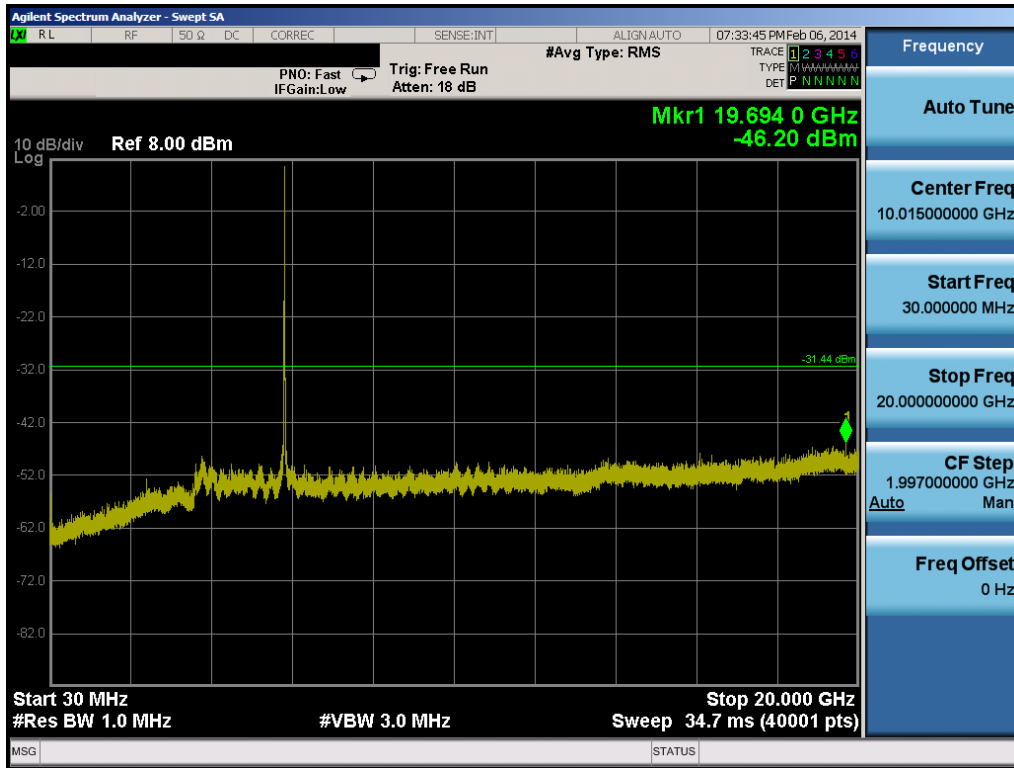

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 84 of 120

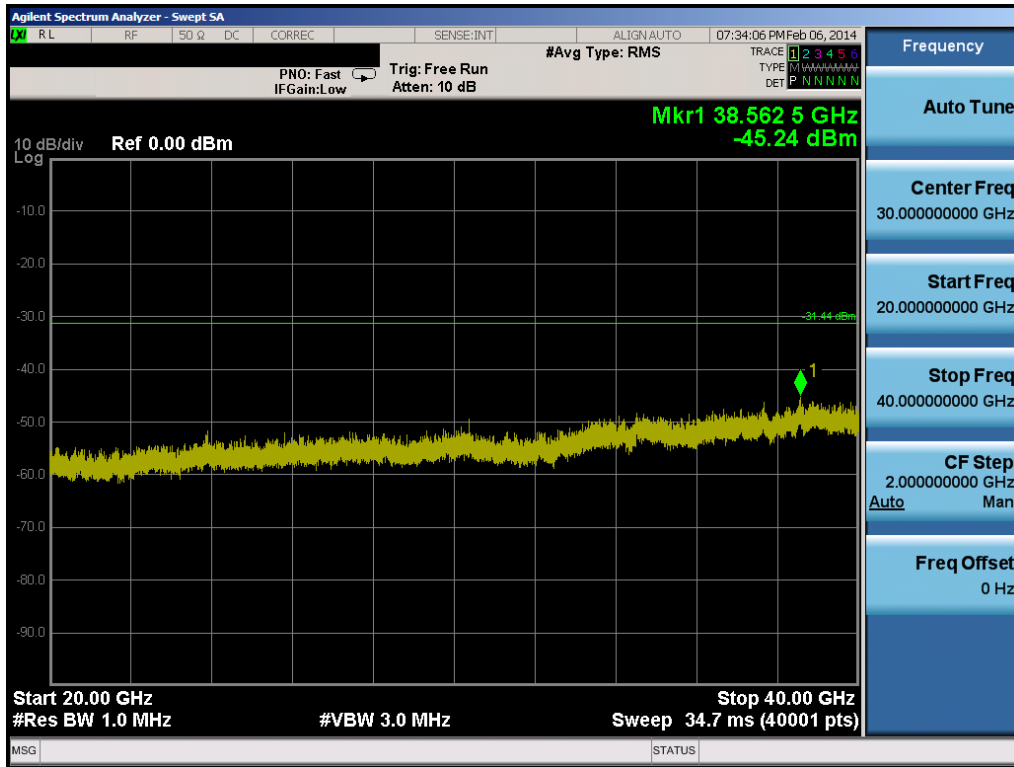


Plot 6-111. Conducted Spurious Plot (802.11a – Ch. 165)




Plot 6-112. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 85 of 120

## Antenna-2 Conducted Spurious Emissions §15.247(d); RSS-210 [A8.5]

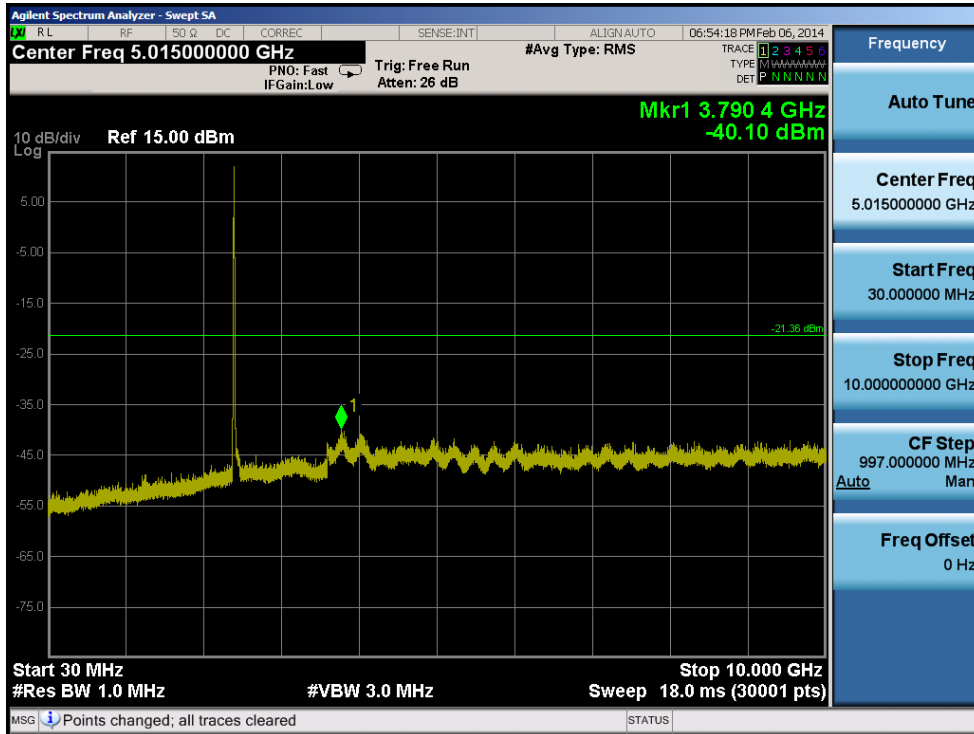


Plot 6-113. Conducted Spurious Plot (802.11b – Ch. 1)

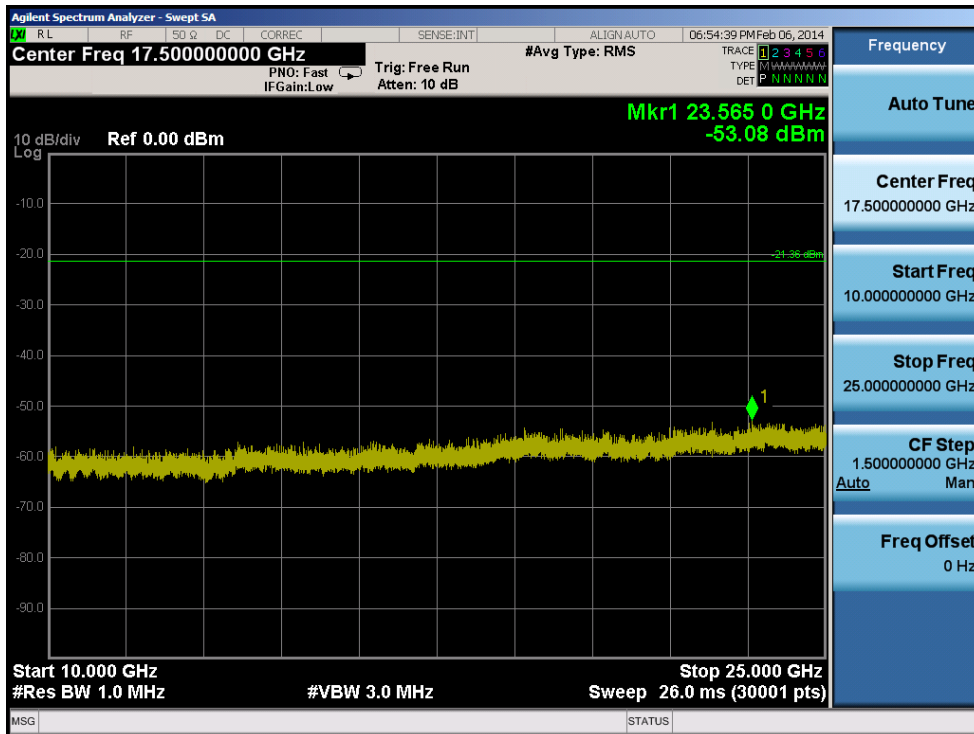


Plot 6-114. Conducted Spurious Plot (802.11b – Ch. 1)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 86 of 120

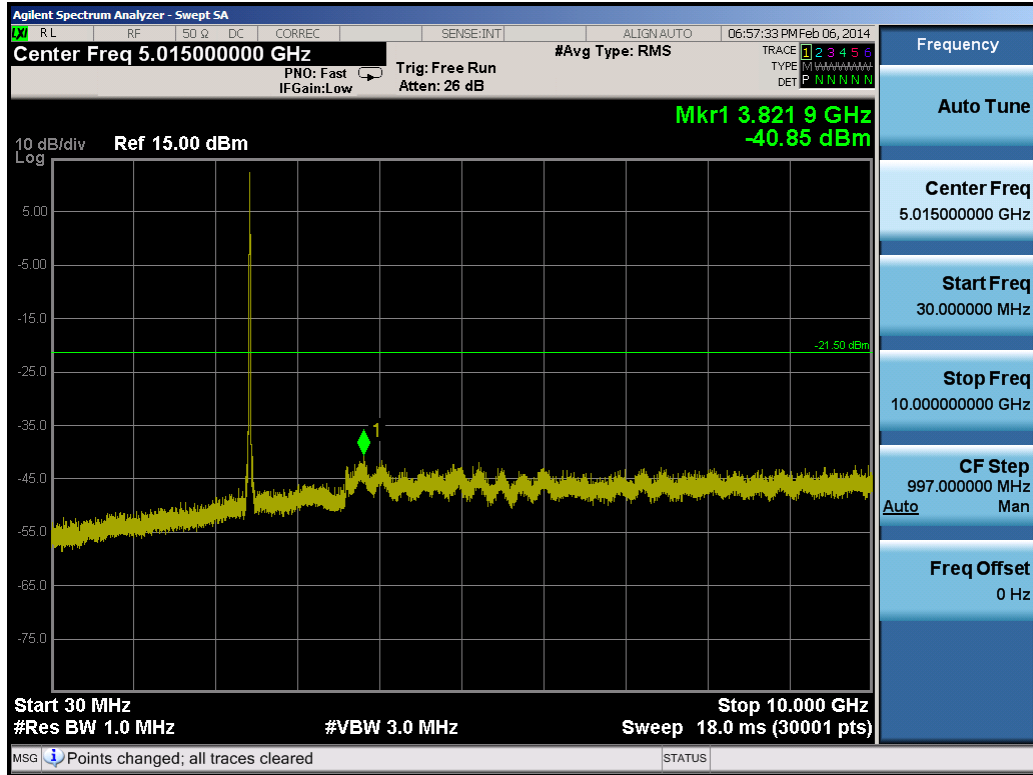


Plot 6-115. Conducted Spurious Plot (802.11b – Ch. 6)

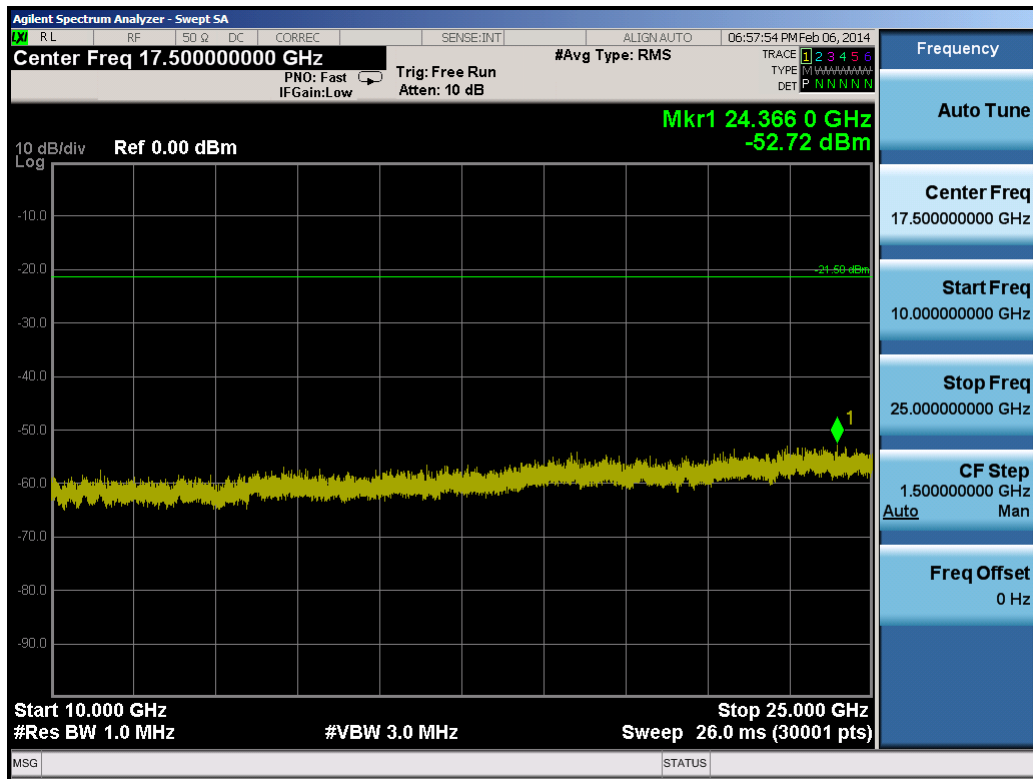


Plot 6-116. Conducted Spurious Plot (802.11b – Ch. 6)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 87 of 120

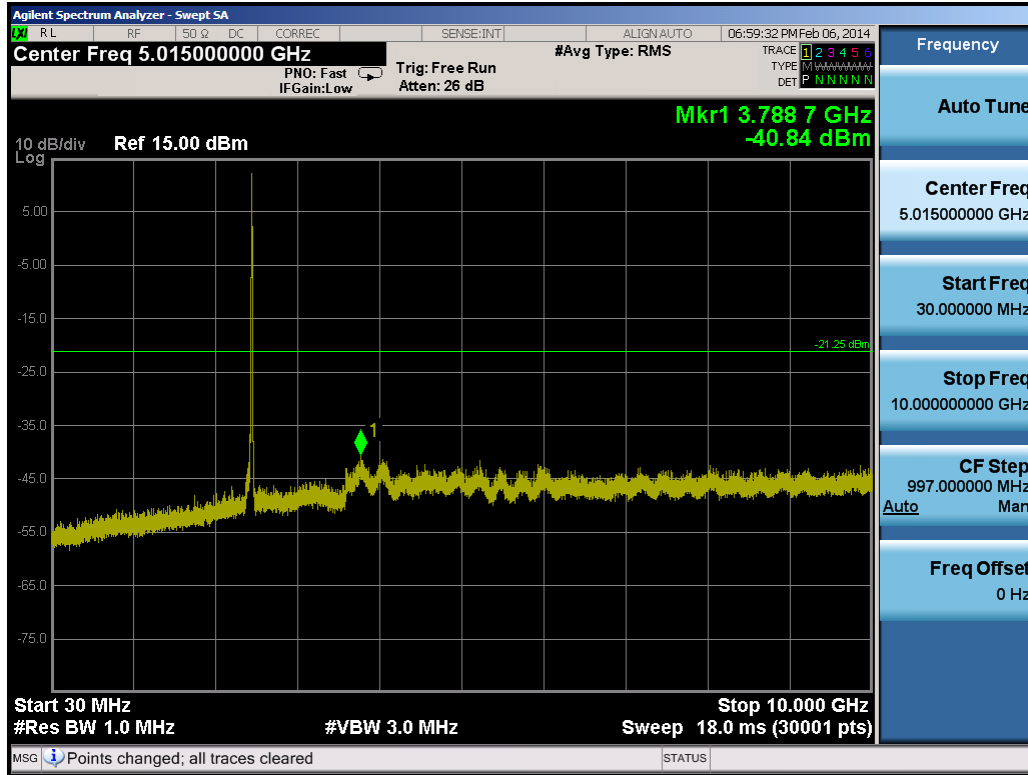


**Plot 6-117. Conducted Spurious Plot (802.11b – Ch. 11)**

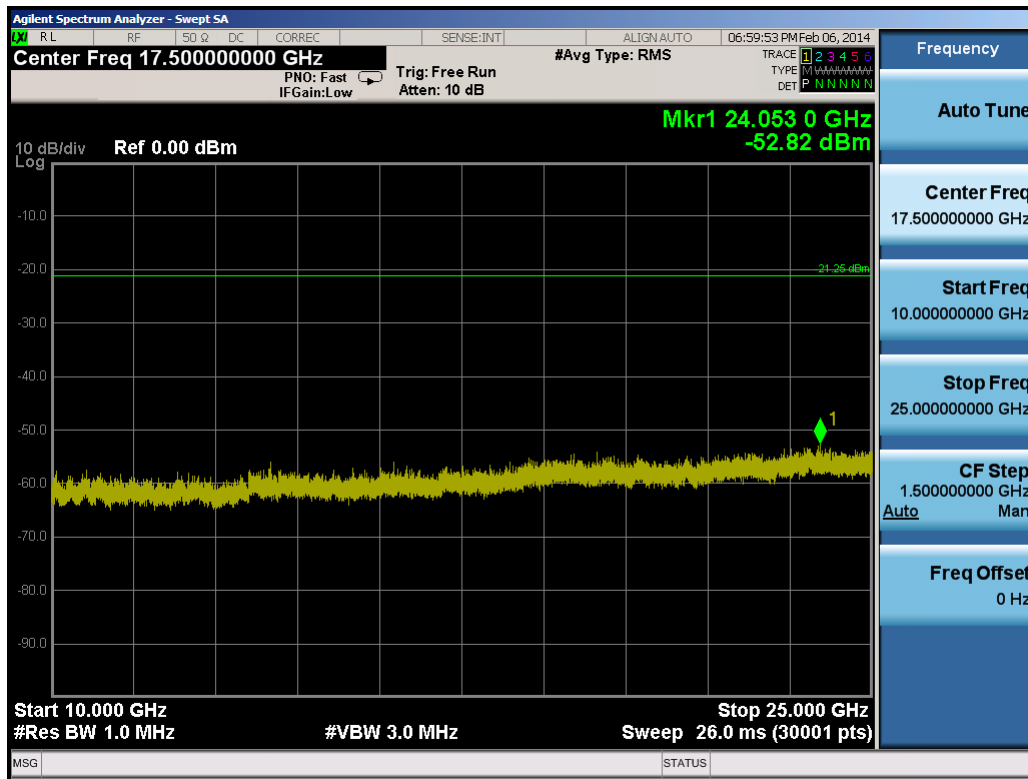


**Plot 6-118. Conducted Spurious Plot (802.11b – Ch. 11)**

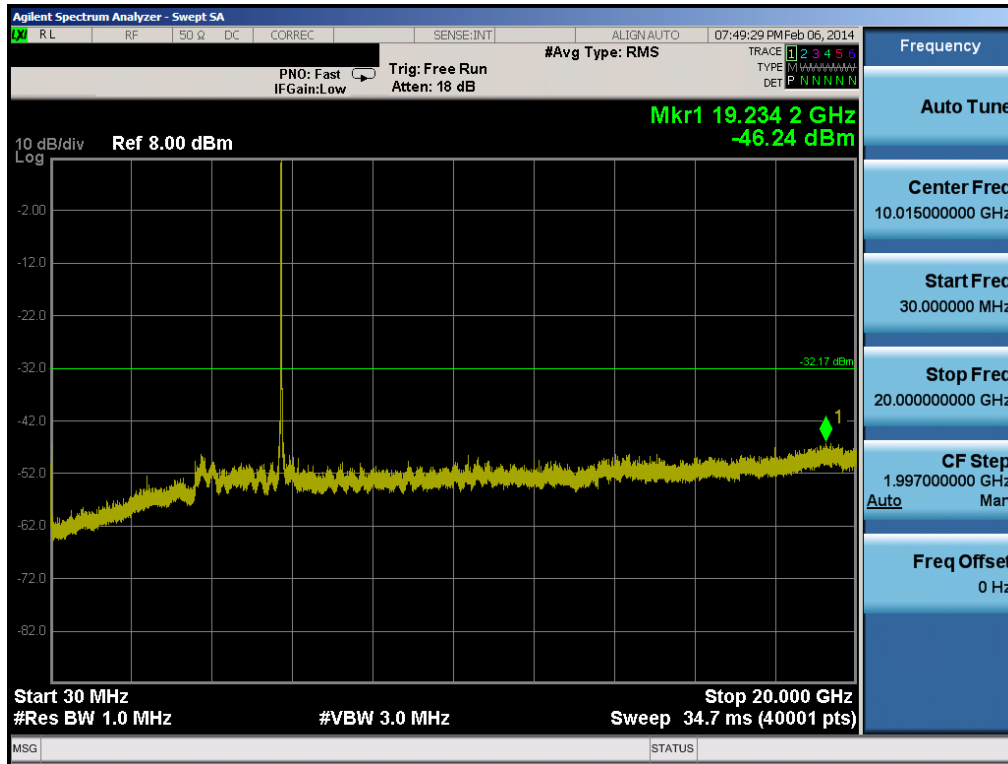

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 88 of 120

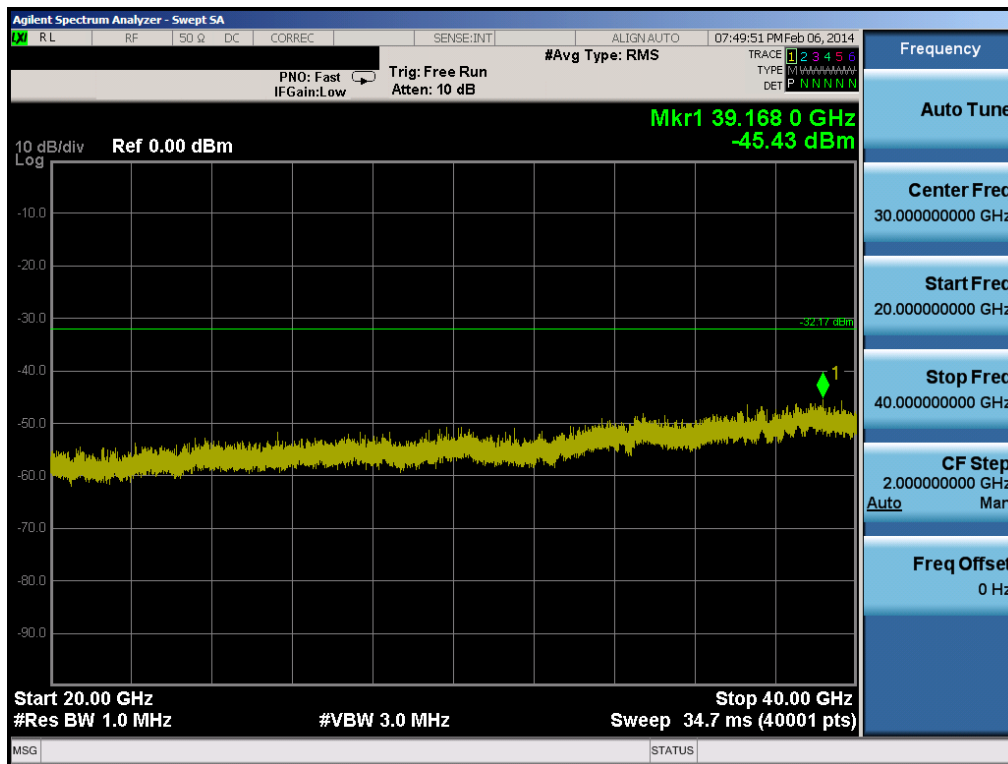


Plot 6-119. Conducted Spurious Plot (802.11a – Ch. 149)




Plot 6-120. Conducted Spurious Plot (802.11a – Ch. 149)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 89 of 120

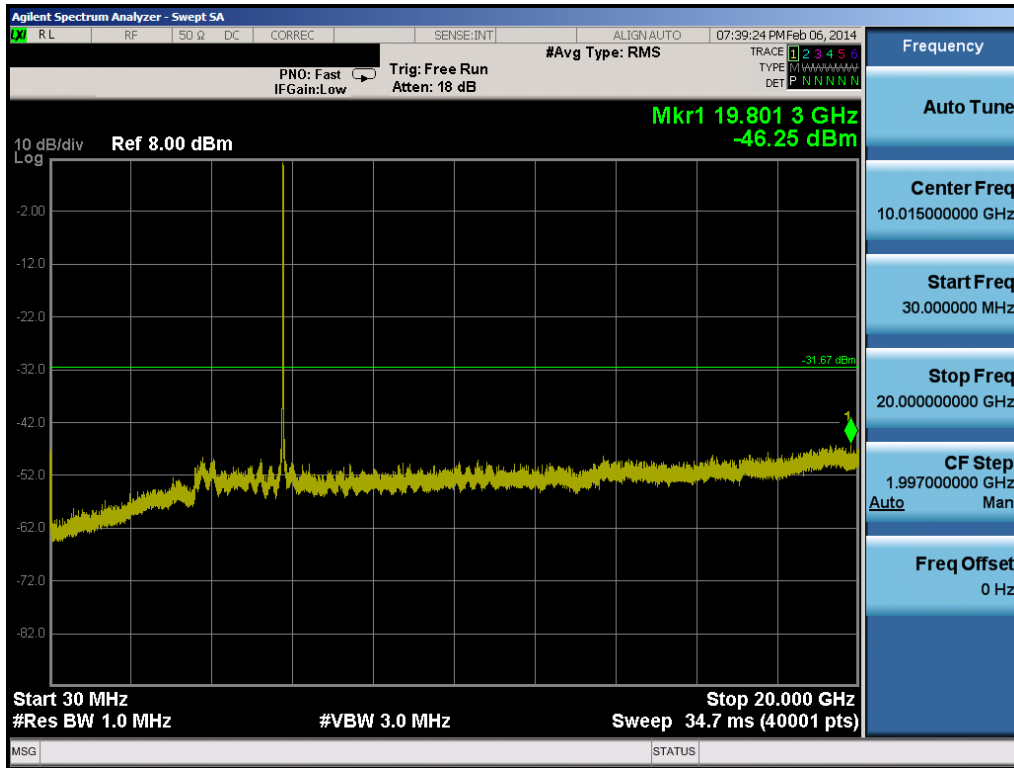


Plot 6-121. Conducted Spurious Plot (802.11a – Ch. 157)

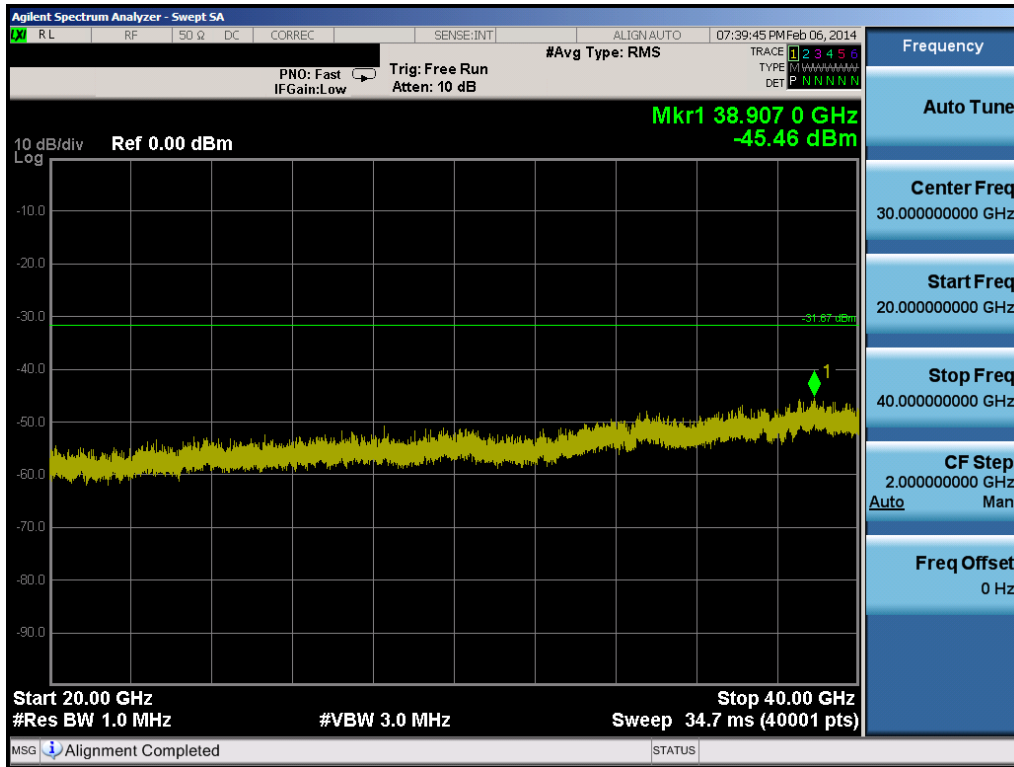


Plot 6-122. Conducted Spurious Plot (802.11a – Ch. 157)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 90 of 120

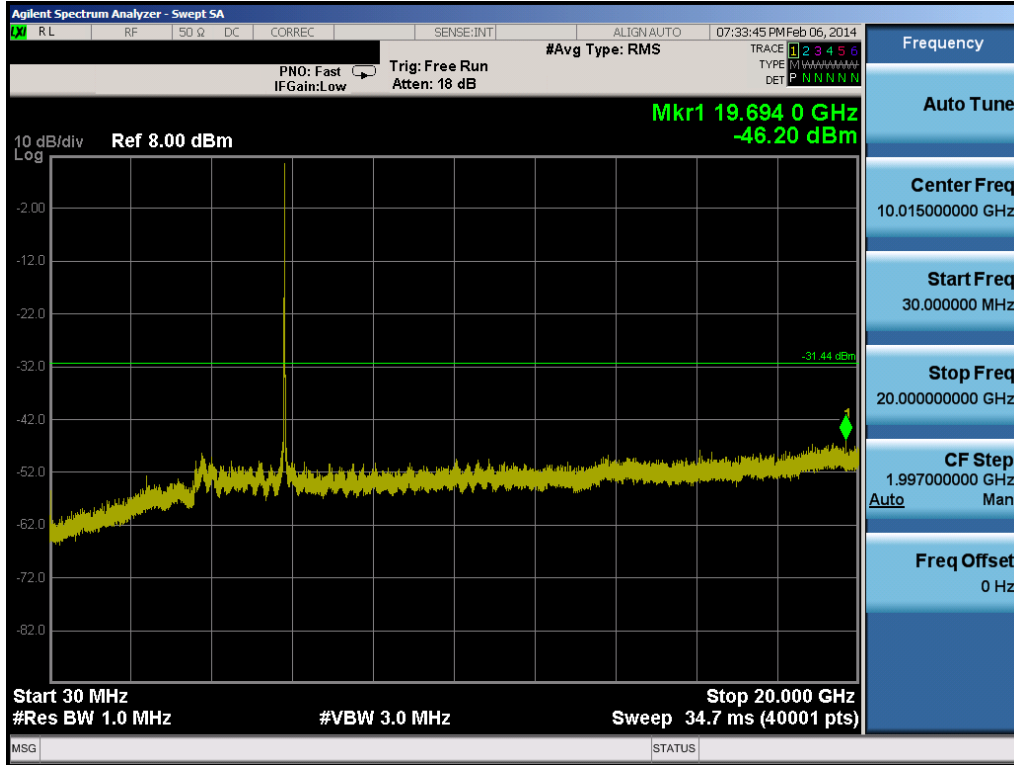

Plot 6-123. Conducted Spurious Plot (802.11a – Ch. 165)

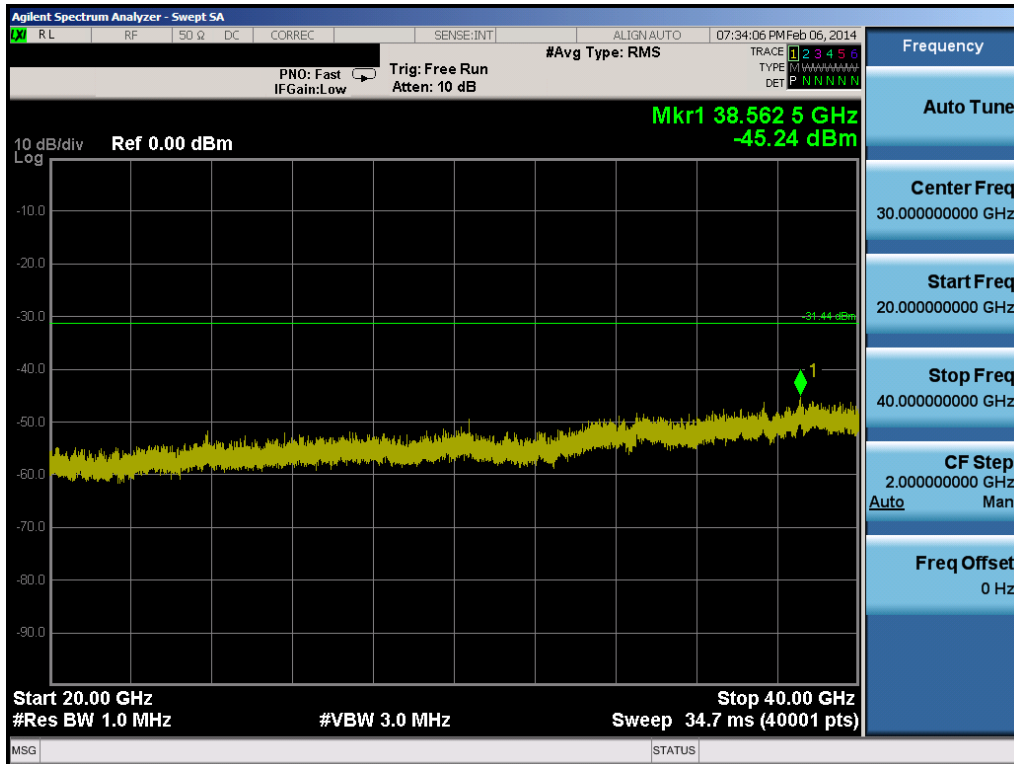

Plot 6-124. Conducted Spurious Plot (802.11a – Ch. 165)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 91 of 120

## 6.7 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle (>98%), at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for radiated spurious emissions. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 6-36 per Section 15.209.***

Frequency	Field Strength [ $\mu\text{V/m}$ ]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

**Table 6-36. Radiated Limits**

### Test Procedures Used



KDB 558074 v03r01 – Section 12.2.5 (average power measurements)

KDB 558074 v03r01 – Section 12.2.4 (peak power measurements)

### Test Settings

#### Average Field Strength Measurements per Section 12.2.5.1 of KDB 558074 v03r01

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be  $\geq 2 \times \text{span/RBW}$ )
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 92 of 120	

**Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 v03r01**



1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

**Test Setup**

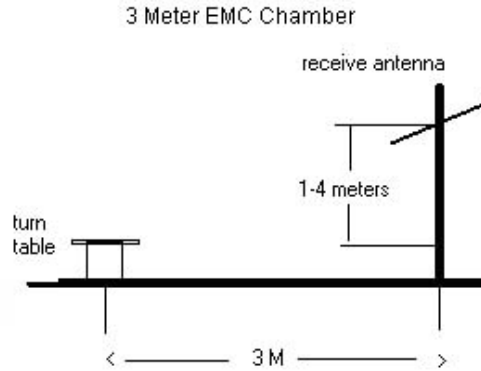The EUT and measurement equipment were set up as shown in the diagram below.



**Figure 6-7. Test Instrument & Measurement Setup**

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset	Page 93 of 120	

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 v03r01 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 6-10.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. Average levels at -135 dBm and peak levels at -125 dBm represent the analyzer noise floor and signify that no emission was detected.

## Sample Calculations



### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB_{\mu V/m}]}$  = Analyzer Level  $_{[dBm]}$  + 107 + AFCL  $_{[dB/m]}$
- AFCL  $_{[dB/m]}$  = Antenna Factor  $_{[dB/m]}$  + Cable Loss  $_{[dB]}$
- Margin  $_{[dB]}$  = Field Strength Level  $_{[dB_{\mu V/m}]}$  – Limit  $_{[dB_{\mu V/m}]}$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 6.8 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + 10 \text{ dB Attenuator}) - \text{Pre-amplifier Gain}$$

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 94 of 120

## Antenna-1 Radiated Spurious Emission Measurements §15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	-96.08	Avg	H	40.23	51.15	53.98	-2.83
4824.00	-92.70	Peak	H	40.23	54.53	73.98	-19.45
12060.00	-135.00	Avg	H	51.02	23.02	53.98	-30.96
12060.00	-125.00	Peak	H	51.02	33.02	73.98	-40.96

**Table 6-37. Radiated Measurements**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	-98.21	Avg	H	40.30	49.09	53.98	-4.89
4874.00	-94.28	Peak	H	40.30	53.02	73.98	-20.96
7311.00	-108.29	Avg	H	43.02	41.73	53.98	-12.25
7311.00	-98.60	Peak	H	43.02	51.42	73.98	-22.56
12185.00	-135.00	Avg	H	51.95	23.95	53.98	-30.03
12185.00	-125.00	Peak	H	51.95	33.95	73.98	-40.03

**Table 6-38. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 95 of 120	

### Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	-95.56	Avg	H	40.35	51.79	53.98	-2.19
4924.00	-92.41	Peak	H	40.35	54.94	73.98	-19.04
7386.00	-106.96	Avg	H	42.97	43.01	53.98	-10.97
7386.00	-97.35	Peak	H	42.97	52.62	73.98	-21.36
12310.00	-135.00	Avg	H	52.84	24.84	53.98	-29.14
12310.00	-125.00	Peak	H	52.84	34.84	73.98	-39.14

**Table 6-39. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11490.00	-135.00	Avg	H	40.23	0.00	12.23	53.98	-41.75
11490.00	-125.00	Peak	H	40.23	0.00	22.23	73.98	-51.75
22980.00	-104.25	Avg	H	48.00	-9.54	41.21	53.98	-12.77
22980.00	-97.98	Peak	H	48.00	-9.54	47.48	73.98	-26.50

**Table 6-40. Radiated Measurements**

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11570.00	-135.00	Avg	H	40.30	12.30	53.98	-41.68
11570.00	-125.00	Peak	H	40.30	22.30	73.98	-51.68

**Table 6-41. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11650.00	-135.00	Avg	H	40.35	12.35	53.98	-41.63
11650.00	-125.00	Peak	H	40.35	22.35	73.98	-51.63

**Table 6-42. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 97 of 120

## Antenna-2 Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	-93.57	Avg	H	40.23	53.66	53.98	-0.32
4824.00	-90.31	Peak	H	40.23	56.92	73.98	-17.06
12060.00	-135.00	Avg	H	51.02	23.02	53.98	-30.96
12060.00	-125.00	Peak	H	51.02	33.02	73.98	-40.96

Table 6-43. Radiated Measurements

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	-94.90	Avg	H	40.30	52.40	53.98	-1.58
4874.00	-91.48	Peak	H	40.30	55.82	73.98	-18.16
7311.00	-135.00	Avg	H	43.02	15.02	53.98	-38.96
7311.00	-125.00	Peak	H	43.02	25.02	73.98	-48.96
12185.00	-135.00	Avg	H	51.95	23.95	53.98	-30.03
12185.00	-125.00	Peak	H	51.95	33.95	73.98	-40.03

Table 6-44. Radiated Measurements

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 98 of 120	

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	-93.84	Avg	H	40.35	53.51	53.98	-0.47
4924.00	-90.32	Peak	H	40.35	57.03	73.98	-16.95
7386.00	-135.00	Avg	H	42.97	14.97	53.98	-39.01
7386.00	-125.00	Peak	H	42.97	24.97	73.98	-49.01
12310.00	-135.00	Avg	H	52.84	24.84	53.98	-29.14
12310.00	-125.00	Peak	H	52.84	34.84	73.98	-39.14

**Table 6-45. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11490.00	-135.00	Avg	H	40.23	0.00	12.23	53.98	-41.75
11490.00	-125.00	Peak	H	40.23	0.00	22.23	73.98	-51.75
22980.00	-96.28	Avg	H	48.00	-9.54	49.18	53.98	-4.80
22980.00	-95.77	Peak	H	48.00	-9.54	49.69	73.98	-24.29

**Table 6-46. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 99 of 120	

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11570.00	-135.00	Avg	H	40.30	12.30	53.98	-41.68
11570.00	-125.00	Peak	H	40.30	22.30	73.98	-51.68

**Table 6-47. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11650.00	-135.00	Avg	H	40.35	12.35	53.98	-41.63
11650.00	-125.00	Peak	H	40.35	22.35	73.98	-51.63

**Table 6-48. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 100 of 120

## MIMO Radiated Spurious Emission Measurements

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 01



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4824.00	-106.52	Avg	H	40.23	40.71	53.98	-13.27
4824.00	-94.85	Peak	H	40.23	52.38	73.98	-21.60
12060.00	-135.00	Avg	H	51.02	23.02	53.98	-30.96
12060.00	-125.00	Peak	H	51.02	33.02	73.98	-40.96

**Table 6-49. Radiated Measurements**

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2437MHz  
 Channel: 06

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4874.00	-135.00	Avg	H	40.30	12.30	53.98	-41.68
4874.00	-125.00	Peak	H	40.30	22.30	73.98	-51.68
7311.00	-135.00	Avg	H	43.02	15.02	53.98	-38.96
7311.00	-125.00	Peak	H	43.02	25.02	73.98	-48.96
12185.00	-135.00	Avg	H	51.95	23.95	53.98	-30.03
12185.00	-125.00	Peak	H	51.95	33.95	73.98	-40.03

**Table 6-50. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 101 of 120	

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11b  
 Worst Case Transfer Rate: 1 Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2462MHz  
 Channel: 11



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
4924.00	-106.52	Avg	H	40.35	40.83	53.98	-13.15
4924.00	-94.88	Peak	H	40.35	52.47	73.98	-21.51
7386.00	-135.00	Avg	H	42.97	14.97	53.98	-39.01
7386.00	-125.00	Peak	H	42.97	24.97	73.98	-49.01
12310.00	-135.00	Avg	H	52.84	24.84	53.98	-29.14
12310.00	-125.00	Peak	H	52.84	34.84	73.98	-39.14

**Table 6-51. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5745MHz  
 Channel: 149

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Distance Correction Factor [dB]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11490.00	-135.00	Avg	H	40.23	0.00	12.23	53.98	-41.75
11490.00	-125.00	Peak	H	40.23	0.00	22.23	73.98	-51.75
22980.00	-100.24	Avg	H	48.00	-9.54	45.22	53.98	-8.76
22980.00	-96.20	Peak	H	48.00	-9.54	49.26	73.98	-24.72

**Table 6-52. Radiated Measurements**

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 102 of 120	

## Radiated Spurious Emission Measurements (Cont'd)

§15.247(d) / §15.205 & §15.209; RSS-210 [A8.5]

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5785MHz  
 Channel: 157



Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11570.00	-135.00	Avg	H	40.30	12.30	53.98	-41.68
11570.00	-125.00	Peak	H	40.30	22.30	73.98	-51.68

**Table 6-53. Radiated Measurements**

Worst Case Mode: 802.11a  
 Worst Case Transfer Rate: 6 Mbps  
 Distance of Measurements: 1 & 3 Meters  
 Operating Frequency: 5825MHz  
 Channel: 165

Frequency [MHz]	Analyzer Level [dBm]	Detector	Pol. [H/V]	AFCL [dB/m]	Field Strength [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
11650.00	-135.00	Avg	H	40.35	12.35	53.98	-41.63
11650.00	-125.00	Peak	H	40.35	22.35	73.98	-51.63

**Table 6-54. Radiated Measurements**


FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 103 of 120

## 6.8 Radiated Restricted Band Edge Measurements §15.205 / §15.209; RSS-210 [A8.5]

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

### Antenna 1 Radiated Restricted Band Edge Measurements


Worst Case Mode: 802.11n  
 Worst Case Transfer Rate: MCS0  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2412MHz  
 Channel: 1

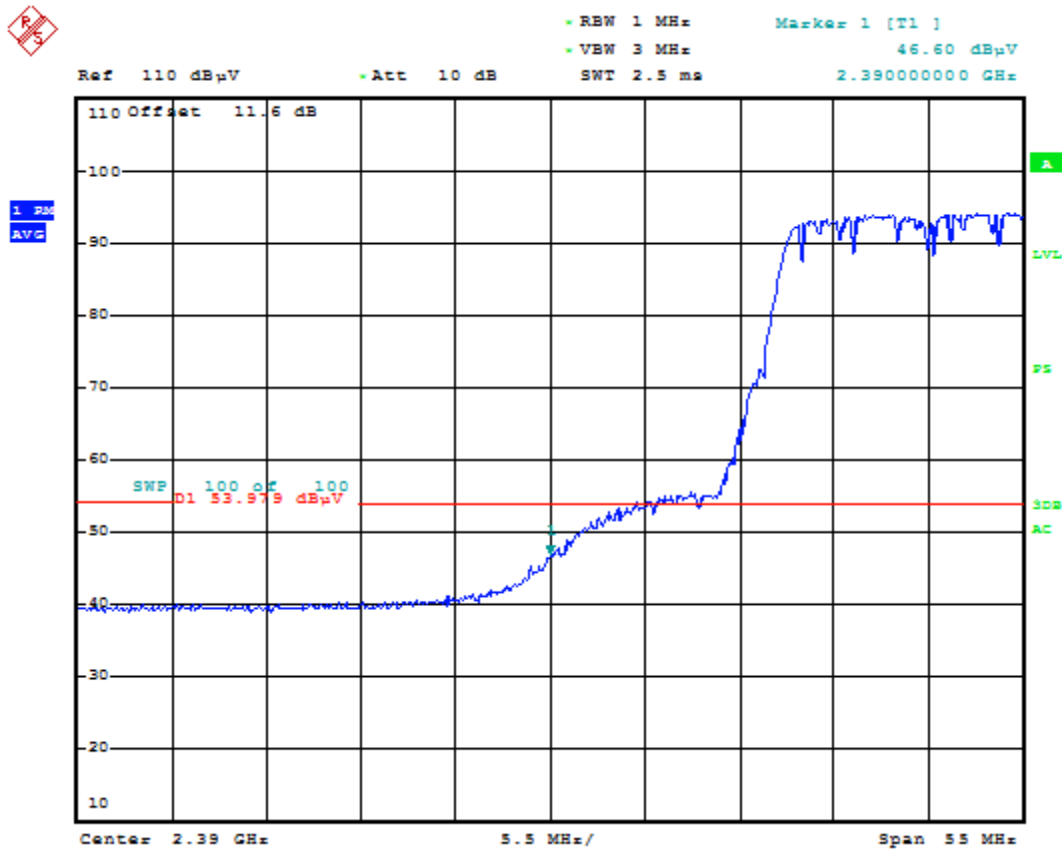

Plot 6-125. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 104 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
**§15.205 / §15.209; RSS-210 [A8.5]**

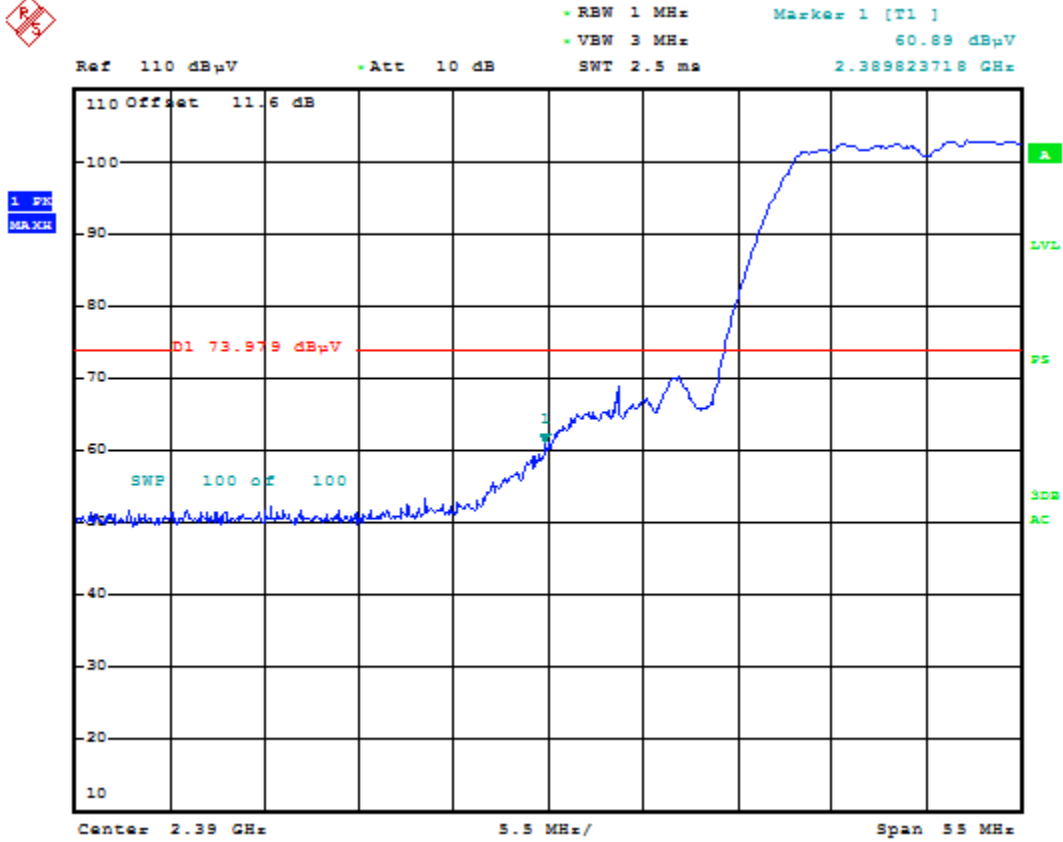

**Plot 6-126. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 105 of 120	

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz


Channel: 11

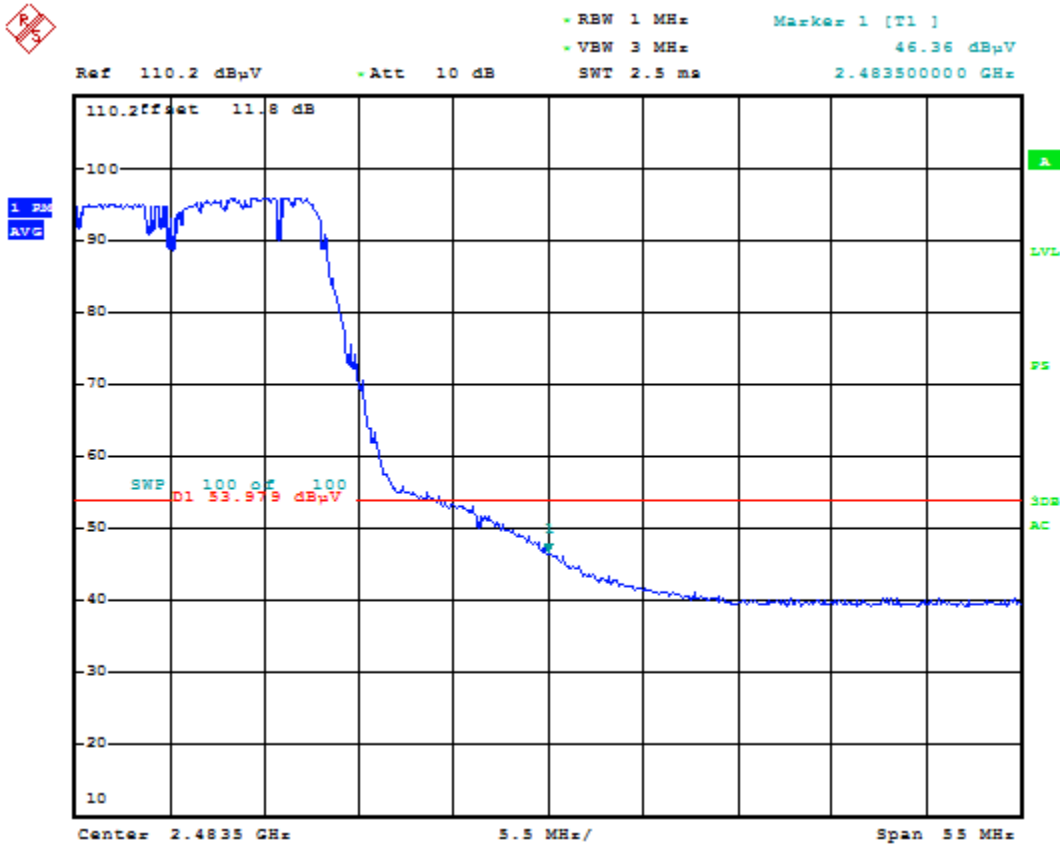

Plot 6-127. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 106 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
**§15.205 / §15.209; RSS-210 [A8.5]**

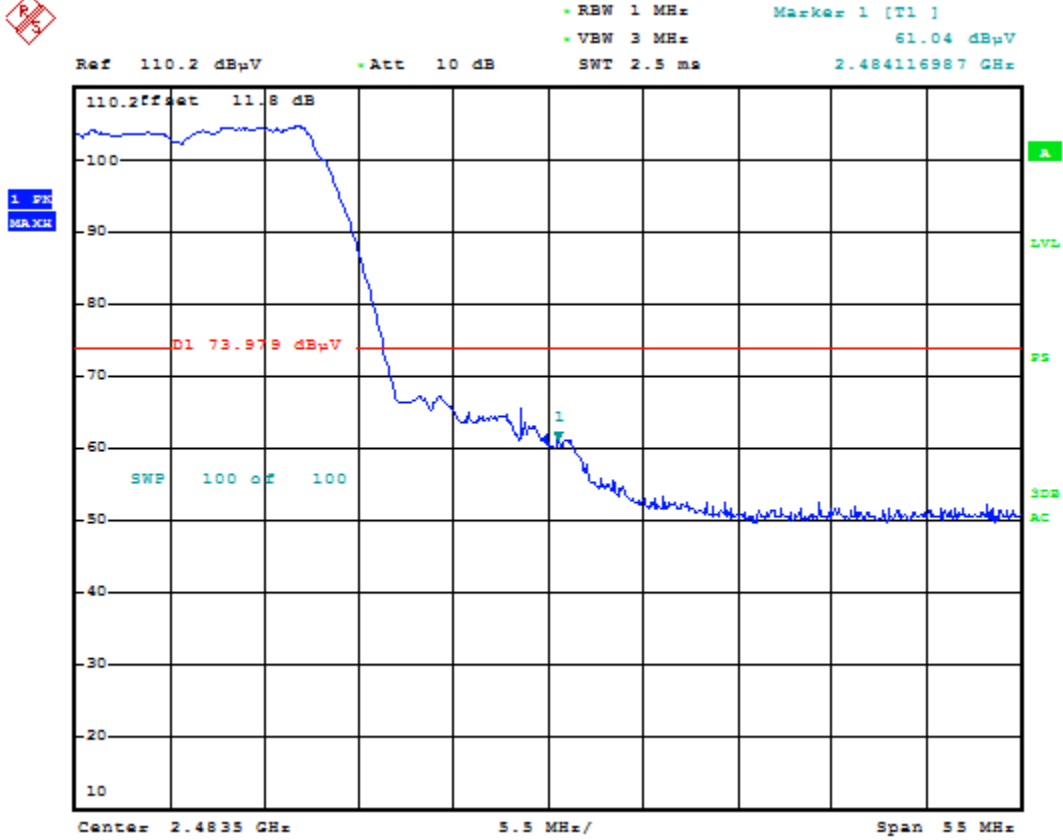

**Plot 6-128. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 107 of 120

## Antenna 2 Radiated Restricted Band Edge Measurements


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz


Channel: 1

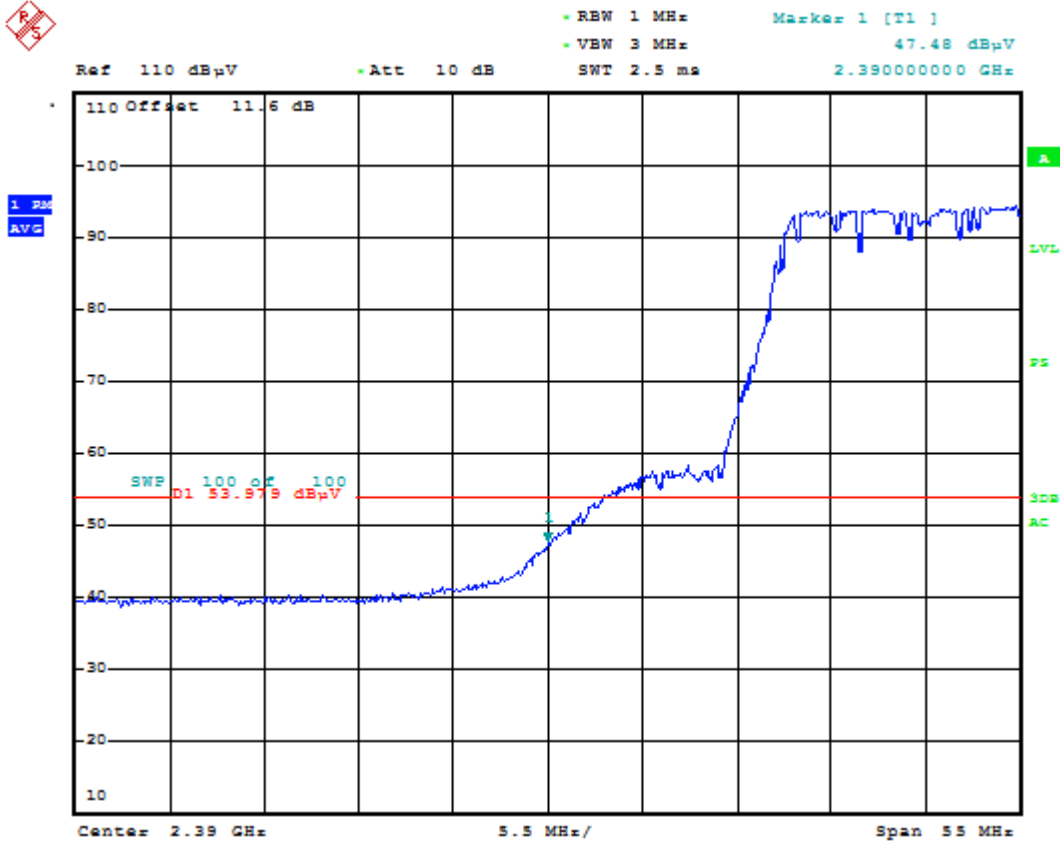

Plot 6-129. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 108 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
**§15.205 / §15.209; RSS-210 [A8.5]**

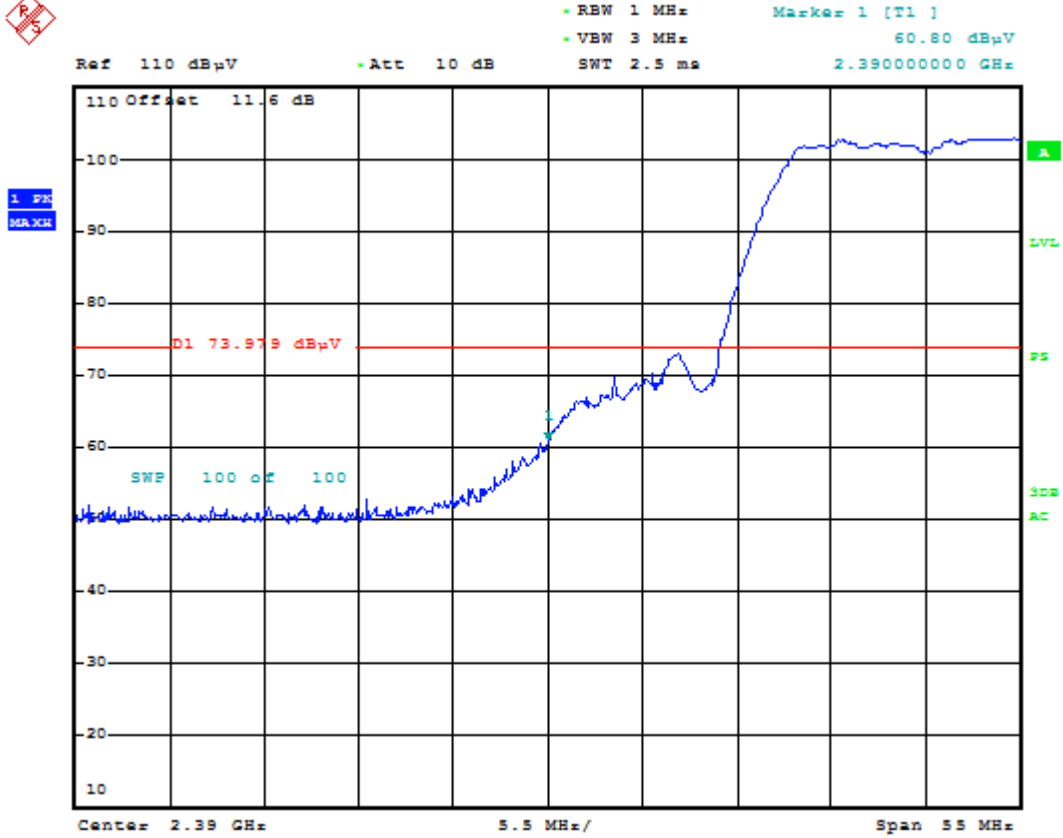

**Plot 6-130. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 109 of 120

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS0

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz


Channel: 11

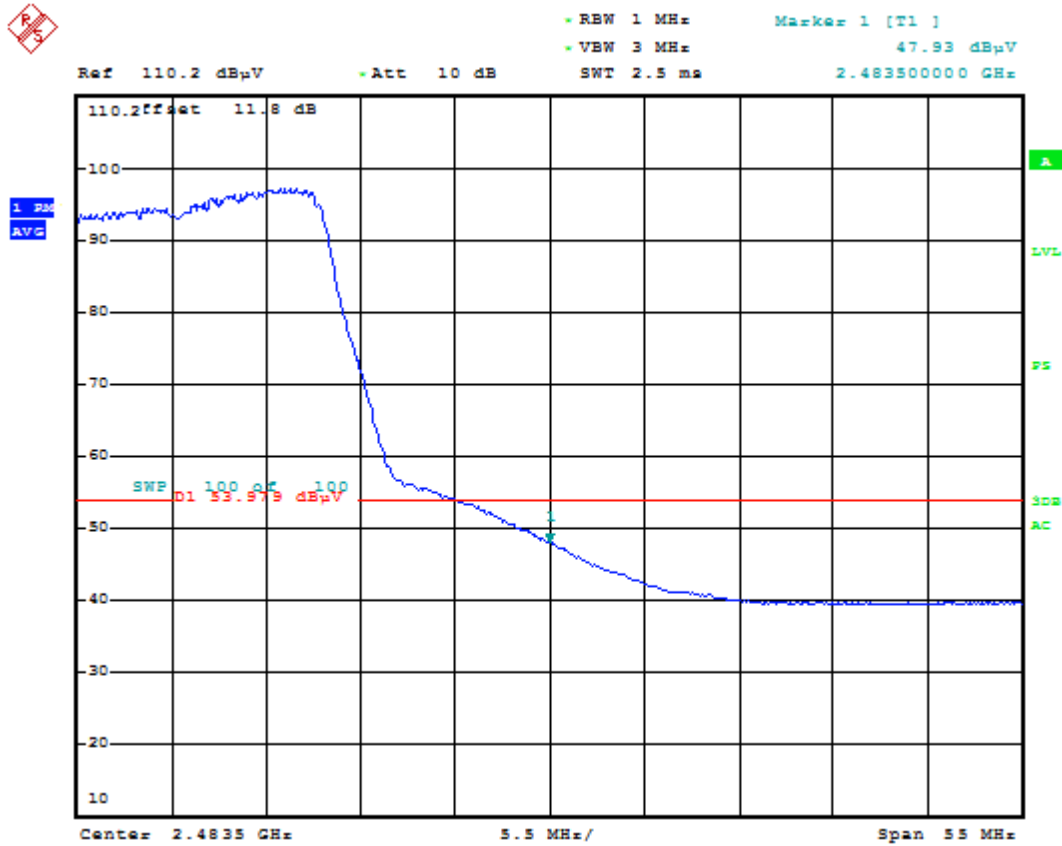

Plot 6-131. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 110 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
§15.205 / §15.209; RSS-210 [A8.5]

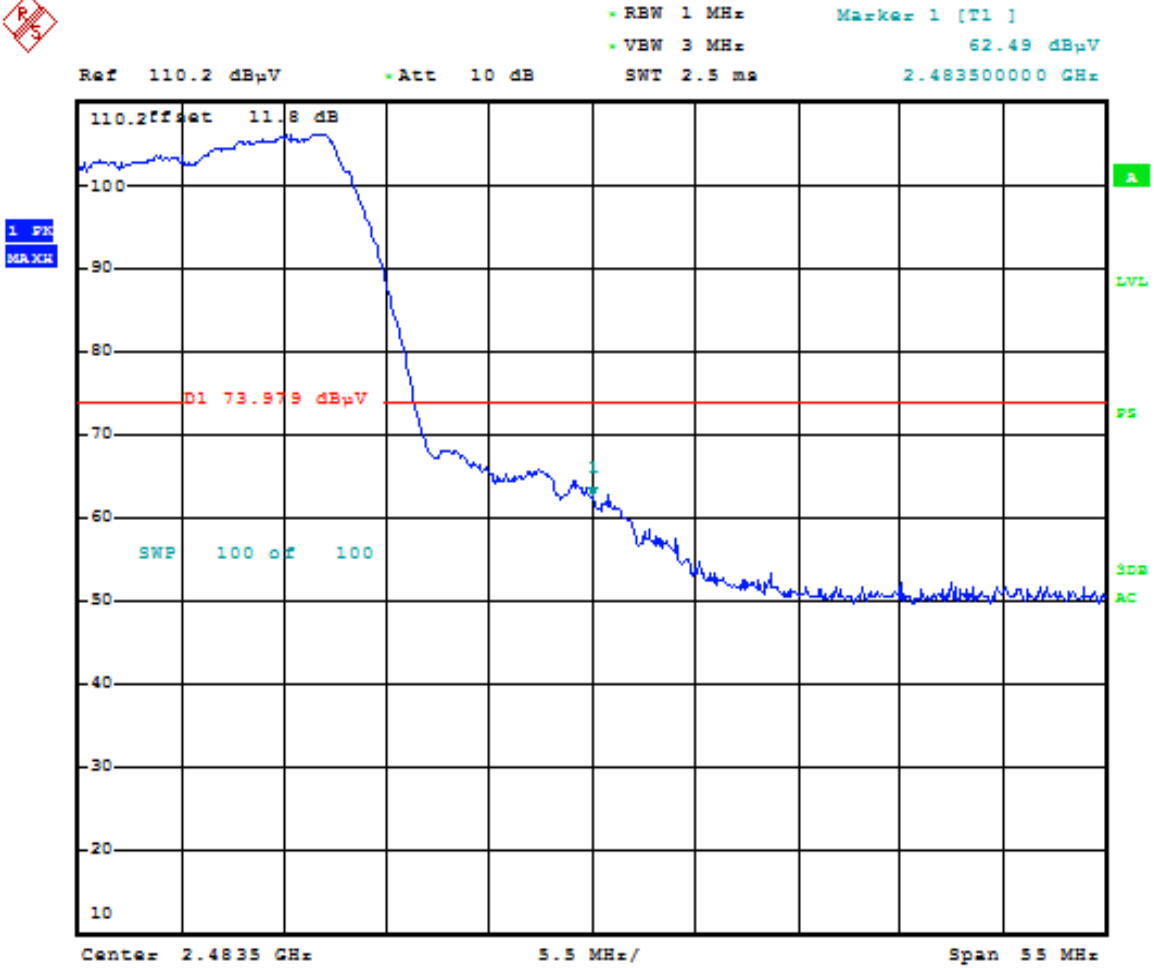

**Plot 6-132. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset	Page 111 of 120	

## MIMO Radiated Restricted Band Edge Measurements


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2412MHz


Channel: 1

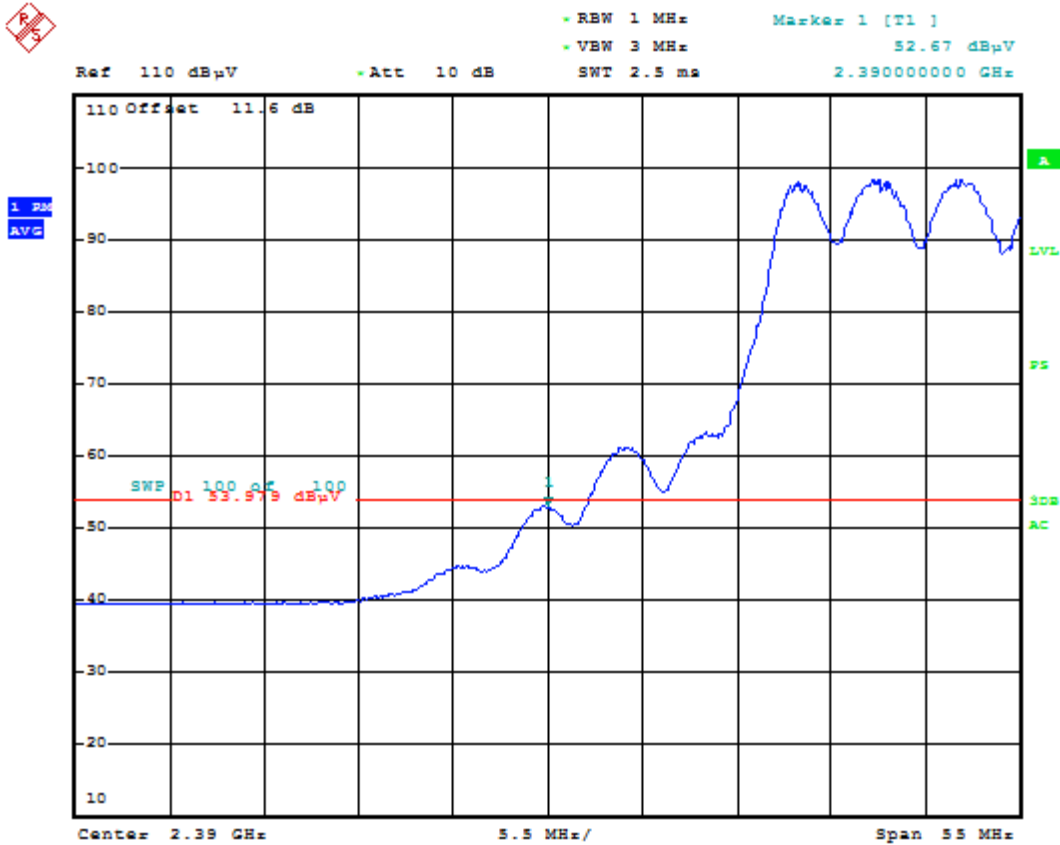

Plot 6-133. Radiated Restricted Lower Band Edge Measurement (Average)

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 112 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
**§15.205 / §15.209; RSS-210 [A8.5]**

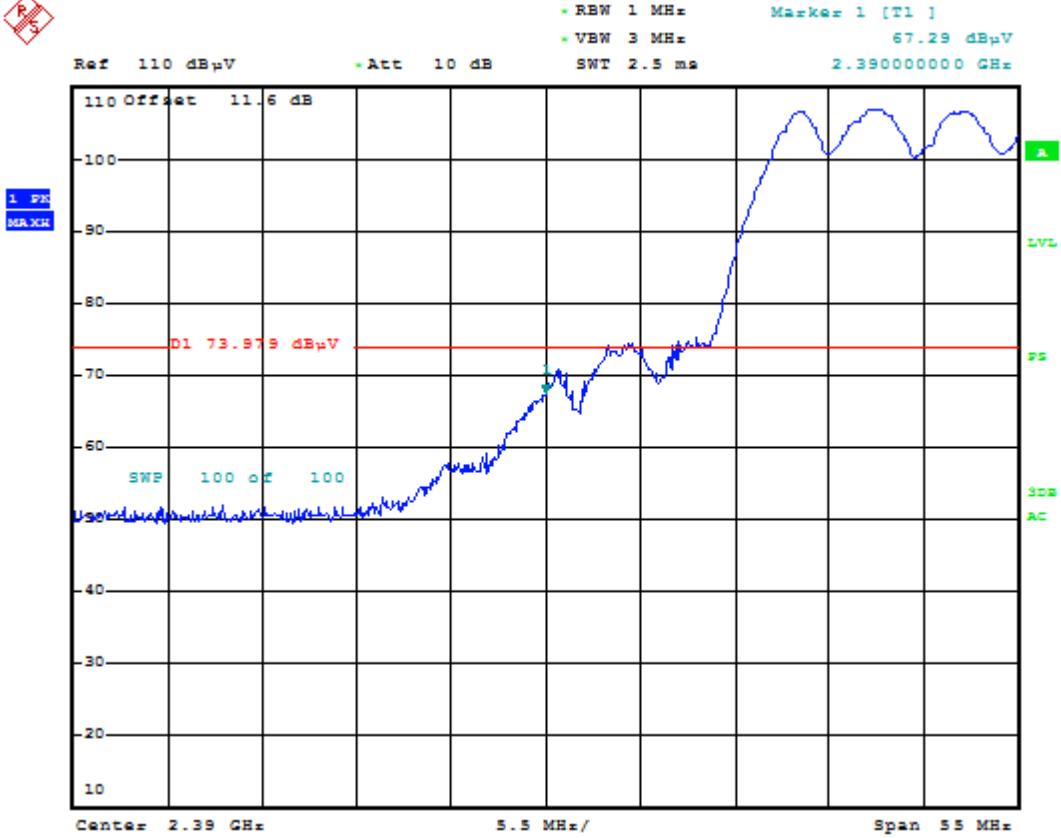

**Plot 6-134. Radiated Restricted Lower Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	<b>PCTEST</b> ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	<b>SAMSUNG</b>	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 113 of 120

## Radiated Restricted Band Edge Measurements (Cont'd)

§15.205 / §15.209; RSS-210 [A8.5]


Worst Case Mode: 802.11n

Worst Case Transfer Rate: MCS8

Distance of Measurements: 3 Meters

Operating Frequency: 2462MHz


Channel: 11

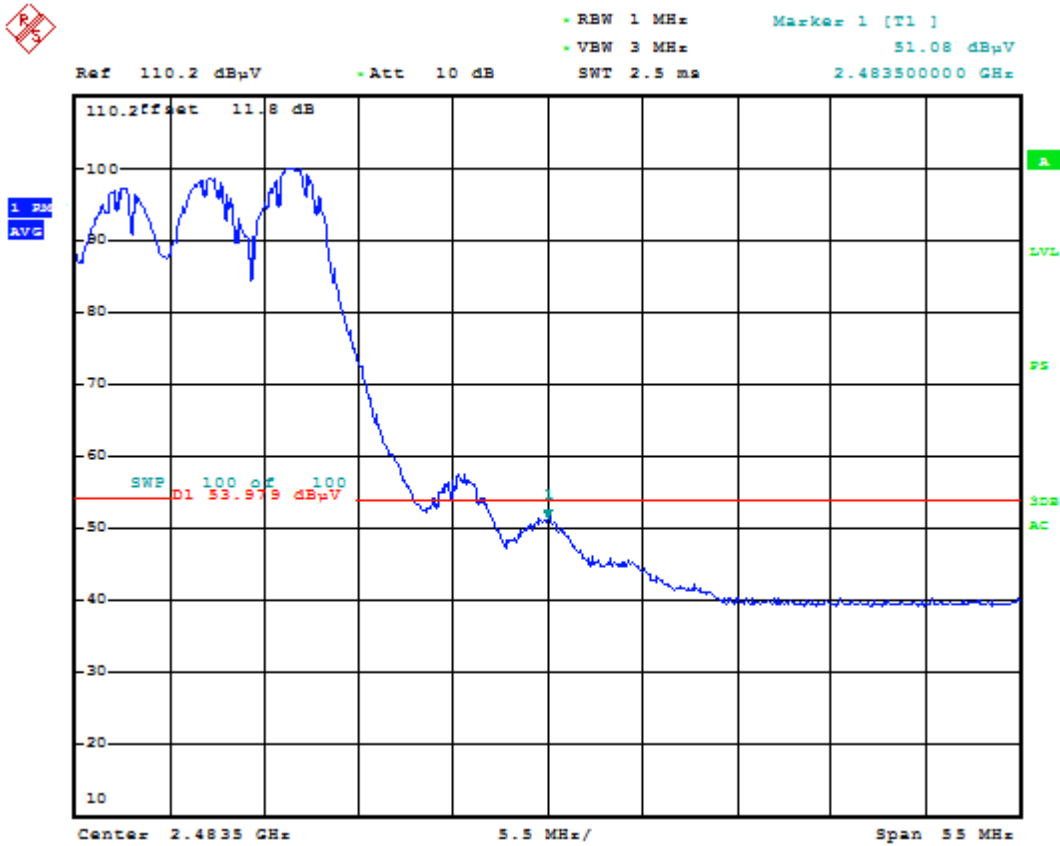

Plot 6-135. Radiated Restricted Upper Band Edge Measurement (Average)

FCC ID: A3LSMG900S	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 114 of 120

**Radiated Restricted Band Edge Measurements (Cont'd)**  
**§15.205 / §15.209; RSS-210 [A8.5]**

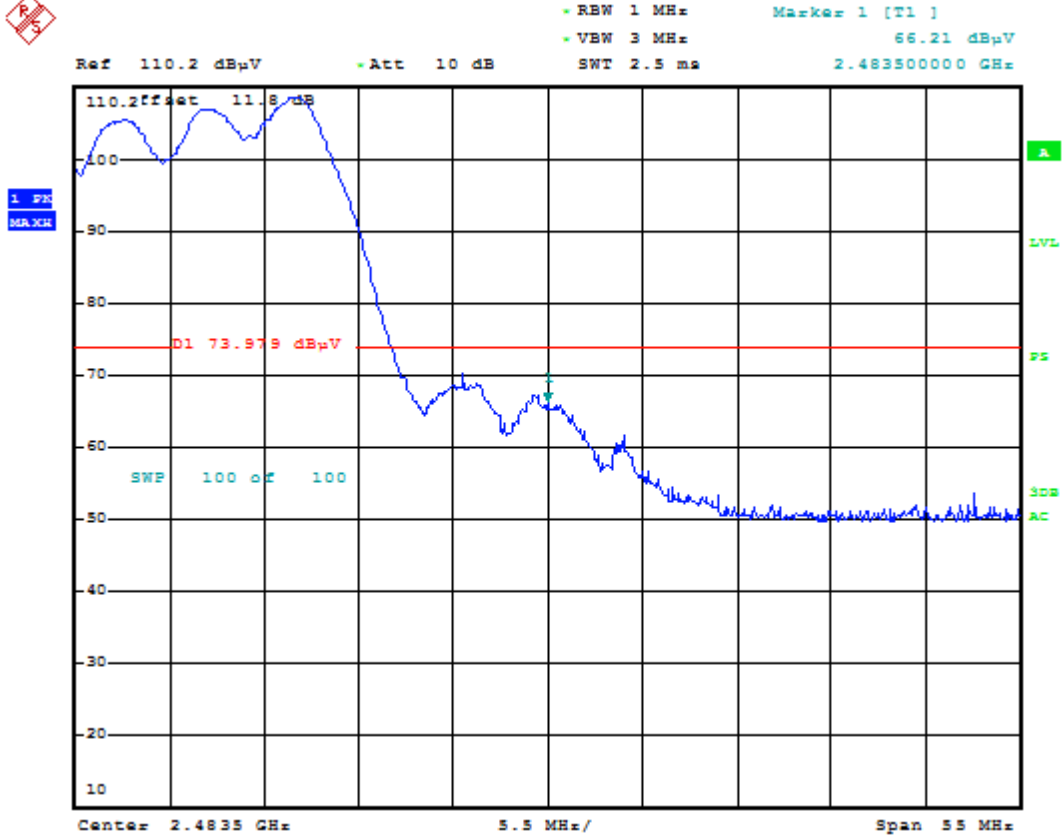


**Plot 6-136. Radiated Restricted Upper Band Edge Measurement (Peak)**

FCC ID: A3LSMG900S	PCTEST ENGINEERING LABORATORY, INC.	FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)	SAMSUNG	Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 115 of 120

## 6.9 Line-Conducted Test Data

### §15.207; RSS-Gen [7.2.2]

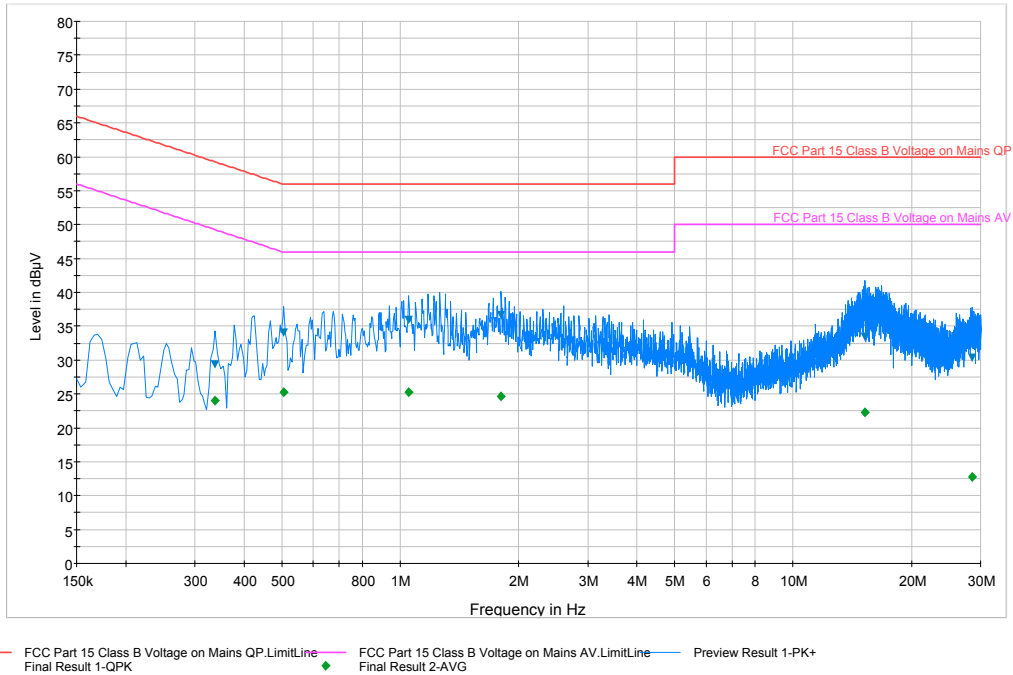

**Plot 6-137. Line Conducted Plot with 802.11b (L1)**

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.338	L1	0.1	29.40	59.30	29.90	24.00	49.30	25.30
0.506	L1	0.1	34.10	56.00	21.90	25.20	46.00	20.80
1.050	L1	0.1	35.90	56.00	20.10	25.30	46.00	20.70
1.806	L1	0.1	36.70	56.00	19.30	24.60	46.00	21.40
15.246	L1	0.5	33.50	60.00	26.50	22.30	50.00	27.70
28.598	L1	0.8	30.40	60.00	29.60	12.80	50.00	37.20

**Table 6-55. Line Conducted Data with 802.11b (L1)**


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 116 of 120

## Line-Conducted Test Data (Cont'd)

### §15.207; RSS-Gen [7.2.2]

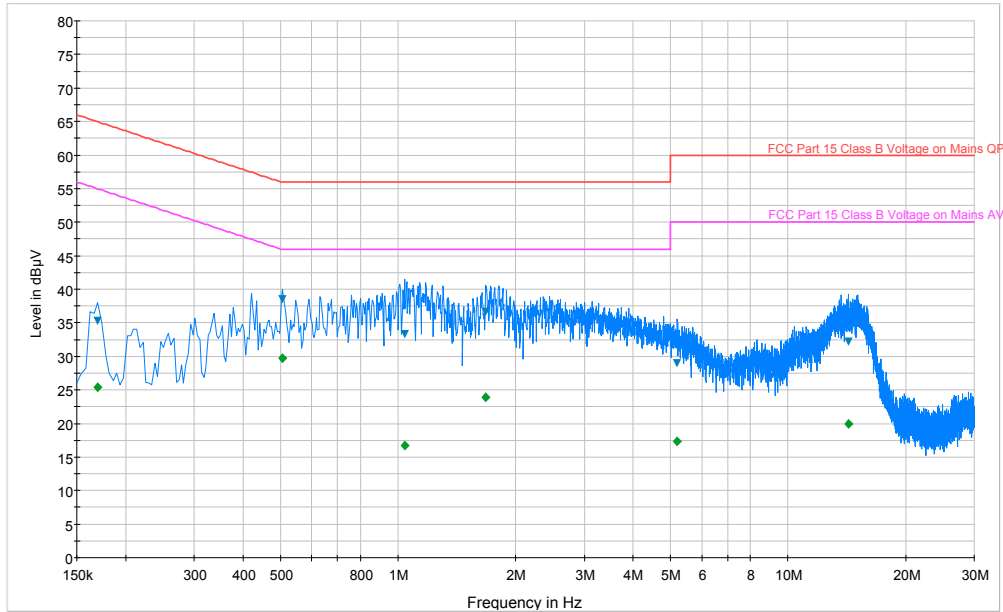

— FCC Part 15 Class B Voltage on Mains QP.LimitLine   
 — FCC Part 15 Class B Voltage on Mains AV.LimitLine   
 — Preview Result 1-PK+  
▼ Final Result 1-QPK   
◆ Final Result 2-AVG

**Plot 6-138. Line Conducted Plot with 802.11b (N)**

Frequency	Line	Corr.	QuasiPeak	Limit	Margin	Average	Limit	Margin
MHz		dB	dBµV	dBµV	dB	dBµV	dBµV	dB
0.170	N	0.2	35.30	65.00	29.70	25.40	55.00	29.60
0.506	N	0.1	38.50	56.00	17.50	29.80	46.00	16.20
1.038	N	0.1	33.30	56.00	22.70	16.70	46.00	29.30
1.678	N	0.2	36.70	56.00	19.30	23.90	46.00	22.10
5.198	N	0.2	29.00	60.00	31.00	17.40	50.00	32.60
14.274	N	0.5	32.20	60.00	27.80	20.00	50.00	30.00

**Table 6-56. Line Conducted Data with 802.11b (N)**


**Notes:**

- All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11b mode using 1Mbps on Channel 6. The emissions found were not affected by the choice of channel used during testing.
- The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
- Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
- QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
- Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
- Traces shown in plot are made using a peak detector.
- Deviations to the Specifications: None.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 117 of 120

# Line-Conducted Test Data (Cont'd)

## §15.207; RSS-Gen [7.2.2]

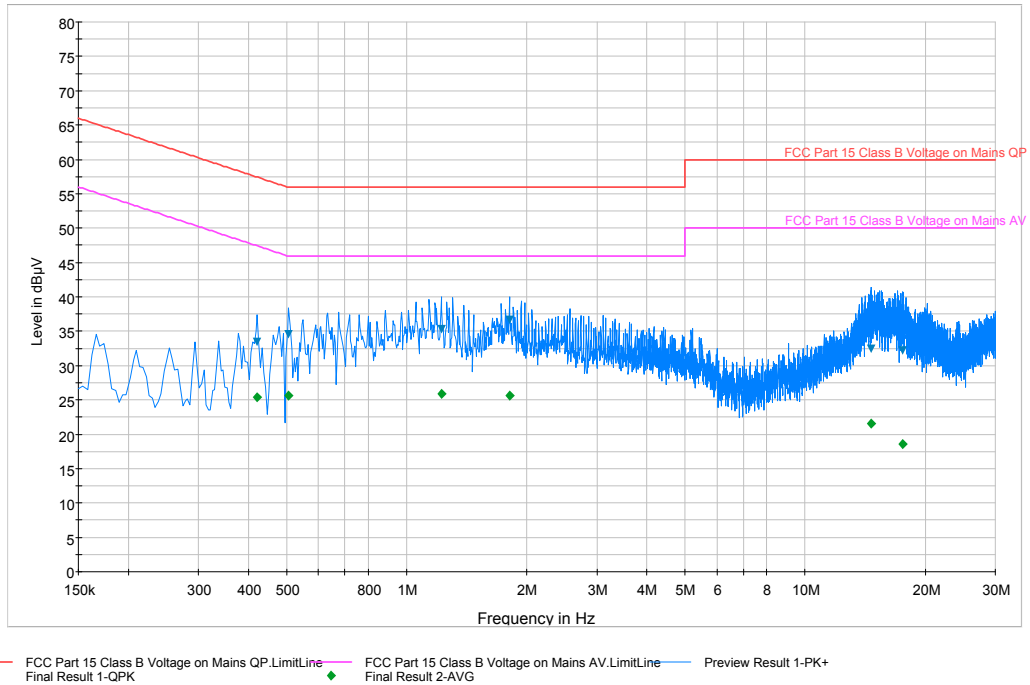

**Plot 6-139. Line Conducted Plot with 802.11a (L1)**

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.422	L1	0.1	33.50	57.40	23.90	25.40	47.40	22.00
0.506	L1	0.1	34.50	56.00	21.50	25.60	46.00	20.40
1.222	L1	0.1	35.30	56.00	20.70	25.90	46.00	20.10
1.810	L1	0.1	36.70	56.00	19.30	25.60	46.00	20.40
14.626	L1	0.5	32.50	60.00	27.50	21.60	50.00	28.40
17.598	L1	0.6	32.10	60.00	27.90	18.50	50.00	31.50

**Table 6-57. Line Conducted Data with 802.11a (L1)**


**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 118 of 120

## Line-Conducted Test Data (Cont'd)

### §15.207; RSS-Gen [7.2.2]

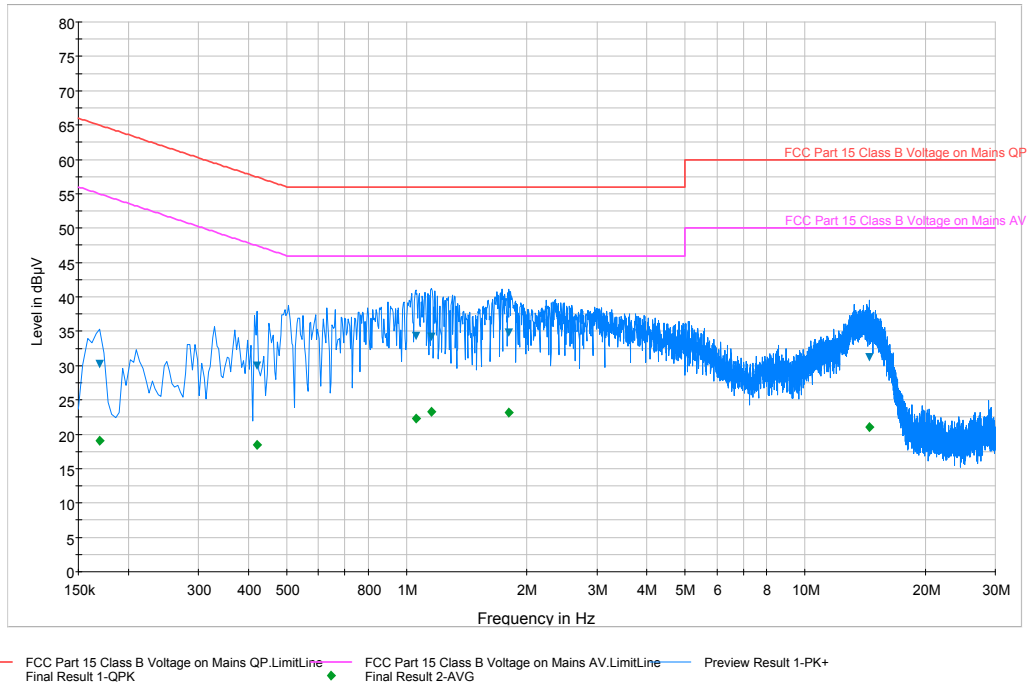

**Plot 6-140. Line Conducted Plot with 802.11a (N)**

Frequency MHz	Line	Corr. dB	QuasiPeak dBµV	Limit dBµV	Margin dB	Average dBµV	Limit dBµV	Margin dB
0.170	N	0.2	30.20	65.00	34.80	19.00	55.00	36.00
0.422	N	0.1	30.00	57.40	27.40	18.50	47.40	28.90
1.054	N	0.1	34.20	56.00	21.80	22.30	46.00	23.70
1.154	N	0.1	34.20	56.00	21.80	23.30	46.00	22.70
1.806	N	0.2	34.80	56.00	21.20	23.10	46.00	22.90
14.494	N	0.5	31.20	60.00	28.80	21.10	50.00	28.90

**Table 6-58. Line Conducted Data with 802.11a (N)**



**Notes:**

1. All modes of operation, data rates, and test channels were investigated and the worst-case emissions are reported in 802.11a mode using 6Mbps on Channel 157. The emissions found were not affected by the choice of channel used during testing.
2. The limit for Class B device(s) from 150kHz to 30MHz are specified in Section 15.207 of the Title 47 CFR.
3. Factor (dB) = Cable loss (dB) + LISN insertion factor (dB)
4. QP/AV Level (dBµV) = QP/AV Analyzer/Receiver Level (dBµV) + Factor (dB)
5. Margin (dB) = QP/AV Limit (dBµV) – QP/AV Level (dBµV)
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: A3LSMG900S		FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0Y1402030289.A3L	Test Dates: 2/5 - 2/17/2014	EUT Type: Portable Handset		Page 119 of 120

## 7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG900S** is in compliance with Part 15C of the FCC Rules and RSS-210 of the Industry Canada Rules.

<b>FCC ID:</b> A3LSMG900S		<b>FCC Pt. 15.247 802.11a/b/g/n/ac MEASUREMENT REPORT (CERTIFICATION)</b>		<b>Reviewed by:</b> Quality Manager
<b>Test Report S/N:</b> 0Y1402030289.A3L	<b>Test Dates:</b> 2/5 - 2/17/2014	<b>EUT Type:</b> Portable Handset		Page 120 of 120