



SAR EVALUATION REPORT

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac, NFC & ANT+

FCC ID: A3LSMG903F
Model Name: SM-G903F

Report Number: 15K21054-S1
Issue Date: 7/2/2015

Prepared for

SAMSUNG ELECTRONICS CO., LTD.
129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI,
GYEONGGI-DO, 443-742, KOREA

Prepared by

UL Korea, Ltd. Suwon Laboratory
218 Maeyeong-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 443-823, Korea
TEL: (031) 337-9902
FAX: (031) 213-5433



TL-637

Revision History

Rev.	Date	Revisions	Revised By
--	7/2/2015	Initial Issue	--

Table of Contents

1.	Attestation of Test Results	5
2.	Test Specification, Methods and Procedures.....	6
3.	Facilities and Accreditation.....	6
4.	SAR Measurement System & Test Equipment	7
4.1.	<i>SAR Measurement System.....</i>	<i>7</i>
4.2.	<i>SAR Scan Procedures.....</i>	<i>8</i>
4.3.	<i>Test Equipment.....</i>	<i>10</i>
5.	Measurement Uncertainty.....	10
6.	Device Under Test (DUT) Information	11
6.1.	<i>DUT Description</i>	<i>11</i>
6.2.	<i>Wireless Technologies.....</i>	<i>11</i>
6.3.	<i>Nominal and Maximum Output Power.....</i>	<i>12</i>
6.4.	<i>General LTE SAR Test and Reporting Considerations.....</i>	<i>13</i>
7.	RF Exposure Conditions (Test Configurations).....	14
8.	Dielectric Property Measurements & System Check	15
8.1.	<i>Dielectric Property Measurements</i>	<i>15</i>
8.2.	<i>System Check.....</i>	<i>18</i>
9.	Conducted Output Power Measurements.....	20
9.1.	<i>GSM</i>	<i>20</i>
9.2.	<i>W-CDMA</i>	<i>22</i>
9.3.	<i>LTE.....</i>	<i>26</i>
9.4.	<i>Wi-Fi 2.4GHz (DTS Band)</i>	<i>29</i>
9.5.	<i>Wi-Fi 5GHz (U-NII Bands).....</i>	<i>30</i>
9.6.	<i>Bluetooth</i>	<i>31</i>
10.	Measured and Reported (Scaled) SAR Results.....	32
10.1.	<i>GSM850.....</i>	<i>34</i>
10.2.	<i>GSM1900.....</i>	<i>34</i>
10.3.	<i>W-CDMA Band V</i>	<i>35</i>
10.4.	<i>W-CDMA Band II.....</i>	<i>35</i>
10.5.	<i>LTE Band 5 (10MHz Bandwidth)</i>	<i>35</i>
10.6.	<i>Wi-Fi (DTS Band).....</i>	<i>36</i>
10.7.	<i>Wi-Fi (U-NII Band).....</i>	<i>36</i>
10.8.	<i>Bluetooth.....</i>	<i>37</i>

11. SAR Measurement Variability 38

12. Simultaneous Transmission SAR Analysis 39

 12.1. Sum of the SAR for GSM850 & Wi-Fi & BT 40

 12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT 40

 12.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT 41

 12.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT 41

 12.5. Sum of the SAR for LTE Band 5 & Wi-Fi & BT 41

Appendixes 42

 A_15K21054 SAR Photos & Ant. Locations..... 42

 B_15K21054 SAR Highest Test Plots..... 42



 C_15K21054 SAR System Check Plots 42

 D_15K21054 SAR Tissue Ingredients 42

 E_15K21054 SAR Probe Cal. Certificates 42

 F_15K21054 SAR Dipole Cal. Certificates..... 42

1. Attestation of Test Results

Applicant Name		SAMSUNG ELECTRONICS CO.,LTD.			
FCC ID		A3LSMG903F			
Model Name		SM-G903F			
Applicable Standards		FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
SAR Limits (W/Kg)					
Exposure Category		Peak spatial-average(1g of tissue)			
General population / Uncontrolled exposure		1.6			
The Highest Reported SAR (W/kg)					
RF Exposure Conditions		Equipment Class			
		Licensed	DTS	U-NII	DSS (BT)
Head		0.929	0.466	0.206	N/A
Body-worn*		1.049	0.192	0.397	
Hotspot/Wi-Fi Direct				0.077	
Simultaneous TX	Head	1.135	1.125	1.135	
	Body-worn*	1.446	1.241	1.446	
Hotspot/Wi-Fi Direct					
Date Tested		6/16/2015 to 6/29/2015			
Test Results		Pass			
<p>*Note: The Body-worn minimum separation distance is 15 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.</p> <p>UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.</p>					
Approved & Released By:			Prepared By:		
					
JiHo Choi Operations Manager UL Korea, Ltd Suwon Laboratory			Justin Park Engineer UL Korea, Ltd Suwon Laboratory		

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 248227 D01 802.11 Wi-Fi SAR v02
- 447498 D01 General RF Exposure Guidance v05r02
- 648474 D04 Handset SAR v01r02
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r03
- 865664 D02 RF Exposure Reporting v01r01
- 941225 D01 3G SAR Procedures v03
- 941225 D05 SAR for LTE Devices v02r03
- 941225 D06 Hotspot Mode v02

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

Suwon
SAR 1 Room
SAR 2 Room
SAR 3 Room


UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637.

The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

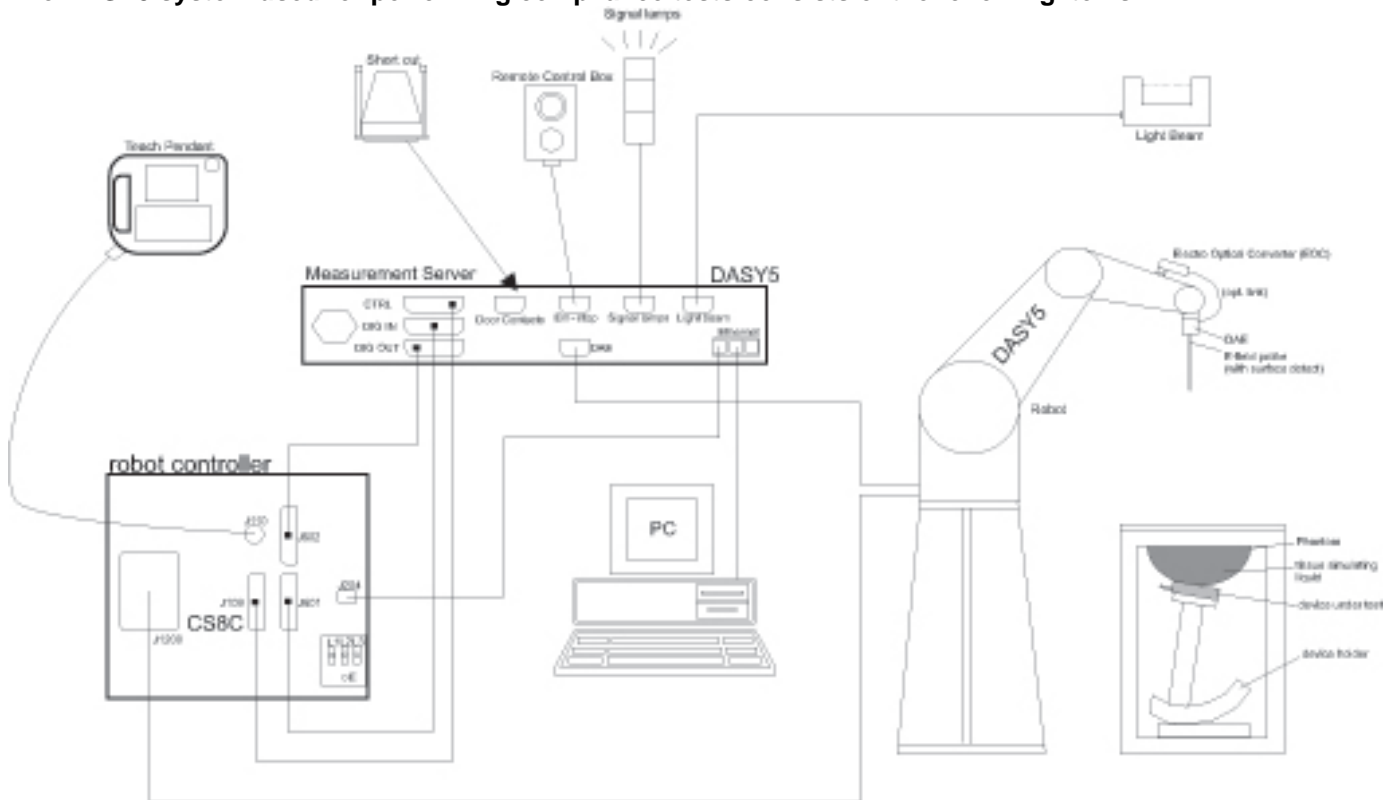

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <i>reported</i> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	E5071C	MY46522054	9-23-2015
Dielectronic Probe kit	SPEAG	DAK-3.5	1196	8-5-2015
Dielectronic Probe kit	SPEAG	DAK-3.5 Short	SM DAK 200 BA	N/A
Thermometer	LKM	DTM3000	3424	11-13-2015

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
MXG Analog Signal Generator	Agilent	N5181A	MY50145882	9-23-2015
Power Sensor	Agilent	U2000A	MY54260010	9-23-2015
Power Sensor	Agilent	U2000A	MY54260007	9-23-2015
Power Amplifier	EXODUS	1410025-AMP2027-10003	10003	11-7-2015
Directional Coupler	Agilent	772D	MY52180193	9-22-2015
Directional Coupler	Agilent	778D	MY52180432	9-22-2015
Low Pass Filter	MICROLAB	LA-15N	03943	11-4-2015
Low Pass Filter	FILTRON	L14012FL	1410003S	11-4-2015
Low Pass Filter	MICROLAB	LA-60N	03942	11-5-2015
Attenuator	Agilent	8491B/003	MY39269292	9-22-2015
Attenuator	Agilent	8491B/010	MY39269315	9-22-2015
Attenuator	Agilent	8491B/020	MY39269298	9-22-2015
E-Field Probe (SAR 1)	SPEAG	EX3DV4	7330	2-12-2016
E-Field Probe (SAR 2)	SPEAG	EX3DV4	7313	8-27-2015
E-Field Probe (SAR 3)	SPEAG	EX3DV4	7323	12-5-2015
Data Acquisition Electronics (SAR 1)	SPEAG	DAE4	1468	1-12-2016
Data Acquisition Electronics (SAR 2)	SPEAG	DAE4	1447	8-25-2015
Data Acquisition Electronics (SAR 3)	SPEAG	DAE4	1446	8-27-2015
System Validation Dipole	SPEAG	D835V2	4d174	8-13-2015
System Validation Dipole	SPEAG	D1900V2	5d199	2-6-2016
System Validation Dipole	SPEAG	D2450V2	939	8-11-2015
System Validation Dipole	SPEAG	D5GHzV2	1209	2-10-2016
Thermometer (SAR 1)	Lutron	MHB-382SD	AH.53049	11-18-2015
Thermometer (SAR 2)	Lutron	MHB-382SD	AH.50215	11-18-2015
Thermometer (SAR 3)	Lutron	MHB-382SD	AH.50213	11-18-2015

Others

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	150313	8-13-2015
Base Station Simulator	R & S	CMW500	150314	8-13-2015
Bluetooth Tester	TESCOM	TC-3000C	3000C000546	11-17-2015

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 142 mm x 72.5 mm Overall Diagonal: 150.3 mm Display Diagonal: 120.95 mm
Back Cover	<input checked="" type="checkbox"/> Normal Battery Cover with NFC
Battery Options	<input checked="" type="checkbox"/> Standard – Lithium-ion battery, Rating 3.85Vdc, 10.78Wh
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 5.8 GHz)
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 5.8 GHz)

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode	Duty Cycle used for SAR testing		
GSM	850 1900	Voice (GMSK) GPRS (GMSK) EGPRS (8PSK)	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%		
		<input checked="" type="checkbox"/> Class B = GPRS connection interrupted during a GSM call, automatically resumed at end of call.			
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6)	100%		
LTE	FDD Band 5	QPSK 16QAM	100% (FDD)		
		Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No			
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)	100%		
		5 GHz		802.11a 802.11n (HT20) 802.11n (HT40) 802.11ac (VHT20) 802.11ac (VHT40) 802.11ac (VHT80)	100%
				Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
	Does this device support Band gap channel? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Bluetooth	2.4 GHz	Version 4.1 LE	77.5% (DH5)		

6.3. Nominal and Maximum Output Power

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

Upper limit (dB): -1.5 ~ 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
GSM850	Voice	32.5	33.0
	GPRS 1 slot	32.5	33.0
	GPRS 2 slots	31.0	31.5
	GPRS 3 slots	29.5	30.0
	GPRS 4 slots	28.5	29.0
	EGPRS 1 slot	27.0	27.5
	EGPRS 2 slots	25.0	25.5
	EGPRS 3 slots	23.5	24.0
	EGPRS 4 slots	22.5	23.0
GSM1900	Voice	29.5	30.0
	GPRS 1 slot	29.5	30.0
	GPRS 2 slots	28.0	28.5
	GPRS 3 slots	26.0	26.5
	GPRS 4 slots	25.0	25.5
	EGPRS 1 slot	26.0	26.5
	EGPRS 2 slots	24.5	25.0
	EGPRS 3 slots	23.0	23.5
	EGPRS 4 slots	21.5	22.0
W-CDMA Band V	R99	23.0	23.5
	HSDPA	23.0	23.5
	HSUPA	23.0	23.5
W-CDMA Band II	R99	23.7	24.2
	HSDPA	23.7	24.2
	HSUPA	23.7	24.2
LTE Band 5	QPSK, 16QAM	24.0	24.5
Upper limit (dB): ~ 0.5		Max. RF Output Power (dBm)	
RF Air interface	Mode	Target	Max. tune-up tolerance limit
WiFi 2.4 GHz	802.11b	17.0	17.5
	802.11g	16.0	16.5
	802.11n HT20	12.0	12.5
WiFi 5 GHz	802.11a	12.0	12.5
	802.11n HT20	12.0	12.5
	802.11n HT40	12.0	12.5
	802.11ac VHT40	12.0	12.5
	802.11ac VHT80	12.0	12.5
Bluetooth		8.0	8.5
Bluetooth LE		6.4	6.9

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 5	Frequency range: 824 - 849 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			20450/ 829	20425/ 826.5	20415/ 825.5	20407/ 824.7																																						
	Mid			20525/ 836.5	20525/ 836.5	20525/ 836.5	20525/ 836.5																																						
High			20600/ 844	20625/ 846.5	20635/ 847.5	20643/ 848.3																																							
LTE transmitter and antenna implementation	LTE has one (1) TX/RX antennas and one (1) RX antennas Refer to Appendix A...																																												
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

7. RF Exposure Conditions (Test Configurations)

Refer to “SAR Photos and Ant locations” Appendix for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
Edge 3 (Bottom)			< 25 mm	Yes		
Edge 4 (Left)			< 25 mm	Yes		
WLAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	2
			Front	N/A	Yes	2
	Hotspot / Wi-Fi Direct	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	> 25 mm	No	1
			Edge 2 (Right)	> 25 mm	No	1
Edge 3 (Bottom)			> 25 mm	No	1	
Edge 4 (Left)			< 25 mm	Yes		

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.
- The Body-worn minimum separation distance is 15 mm. To cover both body-worn and hotspot RF exposure conditions testing was performed at a separation distance of 10 mm.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR 1 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-23-2015	Body 2450	e'	53.5500	Relative Permittivity (ϵ_r):	53.55	52.70	1.61	5
		e"	14.1100	Conductivity (σ):	1.92	1.95	-1.43	5
	Body 2410	e'	53.6400	Relative Permittivity (ϵ_r):	53.64	52.76	1.67	5
		e"	14.0100	Conductivity (σ):	1.88	1.91	-1.58	5
	Body 2475	e'	53.4900	Relative Permittivity (ϵ_r):	53.49	52.67	1.56	5
		e"	14.2300	Conductivity (σ):	1.96	1.99	-1.35	5
6-24-2015	Head 5180	e'	35.6500	Relative Permittivity (ϵ_r):	35.65	36.01	-1.01	5
		e"	16.1400	Conductivity (σ):	4.65	4.63	0.39	5
	Head 5200	e'	35.6100	Relative Permittivity (ϵ_r):	35.61	35.99	-1.06	5
		e"	16.1500	Conductivity (σ):	4.67	4.65	0.40	5
	Head 5600	e'	35.0300	Relative Permittivity (ϵ_r):	35.03	35.53	-1.42	5
		e"	16.3000	Conductivity (σ):	5.08	5.06	0.30	5
	Head 5800	e'	34.7500	Relative Permittivity (ϵ_r):	34.75	35.30	-1.56	5
		e"	16.4000	Conductivity (σ):	5.29	5.27	0.36	5
	Head 5825	e'	34.7100	Relative Permittivity (ϵ_r):	34.71	35.30	-1.67	5
		e"	16.4100	Conductivity (σ):	5.32	5.27	0.85	5

SAR 2 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-16-2015	Head 835	e'	41.7700	Relative Permittivity (ϵ_r):	41.77	41.50	0.65	5
		e"	19.7200	Conductivity (σ):	0.92	0.90	1.73	5
	Head 820	e'	41.9300	Relative Permittivity (ϵ_r):	41.93	41.60	0.79	5
		e"	19.7600	Conductivity (σ):	0.90	0.90	0.28	5
	Head 850	e'	41.6100	Relative Permittivity (ϵ_r):	41.61	41.50	0.27	5
		e"	19.6900	Conductivity (σ):	0.93	0.92	1.71	5
6-17-2015	Head 1900	e'	39.0500	Relative Permittivity (ϵ_r):	39.05	40.00	-2.38	5
		e"	13.6200	Conductivity (σ):	1.44	1.40	2.78	5
	Head 1850	e'	39.2100	Relative Permittivity (ϵ_r):	39.21	40.00	-1.98	5
		e"	13.5100	Conductivity (σ):	1.39	1.40	-0.73	5
	Head 1910	e'	39.0100	Relative Permittivity (ϵ_r):	39.01	40.00	-2.48	5
		e"	13.6400	Conductivity (σ):	1.45	1.40	3.47	5
2015-06-24	Body 5180	e'	48.0300	Relative Permittivity (ϵ_r):	48.03	49.05	-2.07	5
		e"	18.6800	Conductivity (σ):	5.38	5.27	2.07	5
	Body 5200	e'	48.0000	Relative Permittivity (ϵ_r):	48.00	49.02	-2.08	5
		e"	18.7100	Conductivity (σ):	5.41	5.29	2.17	5
	Body 5600	e'	47.3000	Relative Permittivity (ϵ_r):	47.30	48.48	-2.43	5
		e"	19.0600	Conductivity (σ):	5.93	5.76	3.02	5
	Body 5800	e'	46.9500	Relative Permittivity (ϵ_r):	46.95	48.20	-2.59	5
		e"	19.1900	Conductivity (σ):	6.19	6.00	3.15	5
	Body 5825	e'	46.9200	Relative Permittivity (ϵ_r):	46.92	48.20	-2.66	5
		e"	19.2500	Conductivity (σ):	6.23	6.00	3.91	5

SAR 3 Room

Date	Freq. (MHz)	Liquid Parameters		Measured	Target	Delta (%)	Limit ±(%)	
6-16-2015	Body 835	e'	53.0500	Relative Permittivity (ϵ_r):	53.05	55.20	-3.89	5
		e"	21.8400	Conductivity (σ):	1.01	0.97	4.54	5
	Body 820	e'	53.1700	Relative Permittivity (ϵ_r):	53.17	55.28	-3.81	5
		e"	21.9100	Conductivity (σ):	1.00	0.97	3.15	5
	Body 850	e'	52.9200	Relative Permittivity (ϵ_r):	52.92	55.16	-4.06	5
		e"	21.7800	Conductivity (σ):	1.03	0.99	4.28	5
6-17-2015	Body 1900	e'	54.8900	Relative Permittivity (ϵ_r):	54.89	53.30	2.98	5
		e"	14.4900	Conductivity (σ):	1.53	1.52	0.71	5
	Body 1850	e'	54.8200	Relative Permittivity (ϵ_r):	54.82	53.30	2.85	5
		e"	14.3700	Conductivity (σ):	1.48	1.52	-2.75	5
	Body 1910	e'	54.9000	Relative Permittivity (ϵ_r):	54.90	53.30	3.00	5
		e"	14.5100	Conductivity (σ):	1.54	1.52	1.38	5
6-23-2015	Head 2450	e'	38.3500	Relative Permittivity (ϵ_r):	38.35	39.20	-2.17	5
		e"	13.7300	Conductivity (σ):	1.87	1.80	3.91	5
	Head 2410	e'	38.4800	Relative Permittivity (ϵ_r):	38.48	39.28	-2.03	5
		e"	13.6600	Conductivity (σ):	1.83	1.76	3.98	5
	Head 2475	e'	38.2700	Relative Permittivity (ϵ_r):	38.27	39.17	-2.29	5
		e"	13.8000	Conductivity (σ):	1.90	1.83	3.95	5
6-29-2015	Body 1900	e'	53.9300	Relative Permittivity (ϵ_r):	53.93	53.30	1.18	5
		e"	14.9800	Conductivity (σ):	1.58	1.52	4.12	5
	Body 1850	e'	54.0600	Relative Permittivity (ϵ_r):	54.06	53.30	1.43	5
		e"	14.9400	Conductivity (σ):	1.54	1.52	1.11	5
	Body 1910	e'	53.9200	Relative Permittivity (ϵ_r):	53.92	53.30	1.16	5
		e"	15.0000	Conductivity (σ):	1.59	1.52	4.80	5

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10mm (above 1 GHz) and 15 mm (below 1GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

Reference Target SAR Values

The reference SAR values can be obtained from the calibration certificate of system validation dipoles

System Dipole	Serial No.	Cal. Date	Freq. (MHz)	Target SAR Values (W/kg)		
				1g/10g	Head	Body
D835V2	4d174	8-13-2014	835	1g	9.3	9.6
				10g	6.1	6.4
D1900V2	5d199	2-6-2015	1900	1g	41.0	40.6
				10g	21.4	21.6
D2450V2	939	8-11-2014	2450	1g	52.1	51.4
				10g	24.2	24.0
D5GHzV2	1209	2-10-2015	5200	1g	78.2	74.0
				10g	22.2	20.6
			5600	1g	81.3	77.4
				10g	23.2	21.3
			5800	1g	79.6	74.9
				10g	22.5	20.5

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR 1 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-23-2015	D2450V2	939	Body	1g	4.99	49.9	51.40	-2.92	
				10g	2.34	23.4	24.00	-2.50	
6-24-2015	D5GHzV2 (5200)	1209	Head	1g	8.02	80.2	78.2	2.56	1, 2
				10g	2.36	23.6	22.2	6.31	
6-24-2015	D5GHzV2 (5600)	1209	Head	1g	8.41	84.1	81.3	3.44	
				10g	2.48	24.8	23.2	6.90	
6-24-2015	D5GHzV2 (5800)	1209	Head	1g	7.88	78.8	79.6	-1.01	
				10g	2.34	23.4	22.5	4.00	

SAR 2 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-16-2015	D835V2	4d174	Head	1g	1.02	10.20	9.32	9.44	3, 4
				10g	0.67	6.67	6.09	9.52	
6-17-2015	D1900V2	5d199	Head	1g	3.97	39.70	41.00	-3.17	5, 6
				10g	2.02	20.20	21.40	-5.61	
6-24-2015	D5GHzV2 (5200)	1209	Body	1g	7.34	73.40	74.00	-0.81	
				10g	2.09	20.90	20.60	1.46	
6-24-2015	D5GHzV2 (5600)	1209	Body	1g	8.16	81.60	77.40	5.43	
				10g	2.30	23.00	21.30	7.98	
6-24-2015	D5GHzV2 (5800)	1209	Body	1g	6.96	69.60	74.90	-7.08	
				10g	1.97	19.70	20.50	-3.90	

SAR 3 Room

Date Tested	System Dipole		T.S. Liquid	Measured Results		Target (Ref. Value)	Delta $\pm 10\%$	Plot No.	
	Type	Serial #		Zoom Scan to 100 mW	Normalize to 1 W				
6-16-2015	D835V2	4d174	Body	1g	1.01	10.10	9.62	4.99	
				10g	0.67	6.66	6.37	4.55	
6-17-2015	D1900V2	5d199	Body	1g	3.95	39.50	40.60	-2.71	
				10g	2.02	20.20	21.60	-6.48	
6-23-2015	D2450V2	939	Head	1g	5.57	55.70	51.40	8.37	7, 8
				10g	2.55	25.50	24.00	6.25	
6-29-2015	D1900V2	5d199	Body	1g	4.21	42.10	40.6	3.69	
				10g	2.16	21.60	21.60	0.00	

9. Conducted Output Power Measurements

9.1. GSM

GSM850 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst (dBm)	Frame (dBm)		
850	GSM (Voice)	CS1	1	128	824.2	32.9	23.8		
				190	836.6	32.9	23.9		
				251	848.8	32.8	23.8		
	GPRS (GMSK)	CS1	1	1	128	824.2	32.8	23.8	
					190	836.6	32.9	23.9	
					251	848.8	32.8	23.8	
			2	1	2	128	824.2	31.2	25.2
						190	836.6	31.5	25.5
						251	848.8	31.5	25.5
			3	1	3	128	824.2	29.9	25.7
						190	836.6	29.9	25.7
						251	848.8	30.0	25.7
			4	1	4	128	824.2	28.6	25.6
						190	836.6	28.5	25.5
						251	848.8	28.7	25.7
	128	824.2				27.2	18.2		
	190	836.6				27.3	18.2		
	251	848.8				27.3	18.2		
	EGPRS (8PSK)	MCS5	1	1	128	824.2	25.5	19.5	
					190	836.6	25.5	19.5	
					251	848.8	25.5	19.5	
			2	1	2	128	824.2	24.0	19.7
						190	836.6	24.0	19.7
						251	848.8	24.0	19.7
			3	1	3	128	824.2	22.8	19.8
						190	836.6	22.8	19.8
						251	848.8	23.0	20.0

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 3 time slots, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

GSM1900 Measured Results

Band	Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst (dBm)	Frame (dBm)	
1900	GSM (Voice)	CS1	1	512	1850.2	30.0	21.0	
				661	1880.0	30.0	21.0	
				810	1909.8	29.9	20.9	
	GPRS (GMSK)	CS1	1	1	512	1850.2	30.0	21.0
					661	1880.0	30.0	21.0
					810	1909.8	29.8	20.8
			2	2	512	1850.2	28.4	22.3
					661	1880.0	28.2	22.2
					810	1909.8	28.3	22.2
			3	3	512	1850.2	26.5	22.2
					661	1880.0	26.5	22.2
					810	1909.8	26.5	22.2
			4	4	512	1850.2	25.1	22.1
					661	1880.0	25.2	22.2
					810	1909.8	25.0	22.0
	EGPRS (8PSK)	MCS5	1	1	512	1850.2	26.3	17.3
					661	1880.0	26.4	17.4
					810	1909.8	26.3	17.2
			2	2	512	1850.2	25.0	19.0
					661	1880.0	24.8	18.8
					810	1909.8	24.9	18.9
			3	3	512	1850.2	23.5	19.2
					661	1880.0	23.5	19.2
					810	1909.8	23.5	19.2
4			4	512	1850.2	22.0	19.0	
				661	1880.0	22.0	19.0	
				810	1909.8	22.0	19.0	

Notes:

The worst-case configuration and mode for SAR testing is determined to be as follows:

- Head & Body-worn: GMSK Voice Mode
- Hotspot mode: GMSK (GPRS) mode with 2 time slots, based on the output power measurements above.
- SAR is not required for EGPRS (8PSK) mode because its output power is less than that of GPRS Mode

9.2. W-CDMA

Release 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Mode	HSDPA	HSDPA	HSDPA	HSDPA	
Subtest	1	2	3	4	
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
MPR (dB)	0	0	0.5	0.5	
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
$A_{hs}=\beta_{hs}/\beta_c$	30/15				

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	15/1
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
CM (dB)	1	3	2	3	1	
MPR (dB)	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
A _{hs} = β_{hs}/β_c	30/15					
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
Reference E-TFCI PO	27	27	27	27	27	
Maximum Channelization Codes	2xSF2				SF4	

W-CDMA Band II Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg. Pwr (dBm)
W-CDMA Band II	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	23.8
			9400	1880.0	N/A	23.8
			9538	1907.6	N/A	23.6
	HSDPA	Subtest 1	9262	1852.4	0	23.7
			9400	1880.0	0	23.6
			9538	1907.6	0	23.4
		Subtest 2	9262	1852.4	0	23.9
			9400	1880.0	0	23.8
			9538	1907.6	0	23.5
		Subtest 3	9262	1852.4	0.5	23.1
			9400	1880.0	0.5	23.5
			9538	1907.6	0.5	23.2
		Subtest 4	9262	1852.4	0.5	22.9
			9400	1880.0	0.5	22.8
			9538	1907.6	0.5	22.7
	HSUPA	Subtest 1	9262	1852.4	0	22.7
			9400	1880.0	0	22.7
			9538	1907.6	0	22.6
		Subtest 2	9262	1852.4	2	21.8
			9400	1880.0	2	21.8
			9538	1907.6	2	21.7
		Subtest 3	9262	1852.4	1	22.8
			9400	1880.0	1	22.8
			9538	1907.6	1	22.6
		Subtest 4	9262	1852.4	2	21.8
			9400	1880.0	2	21.9
			9538	1907.6	2	21.7
		Subtest 5	9262	1852.4	0	23.5
			9400	1880.0	0	23.5
			9538	1907.6	0	23.5

W-CDMA Band V Measured Results

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Avg. Pwr (dBm)	
W-CDMA Band V	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	23.2	
			4183	836.6	N/A	23.1	
			4233	846.6	N/A	23.3	
	HSDPA	Subtest 1	4132	826.4	0	23.2	
			4183	836.6	0	23.1	
			4233	846.6	0	23.1	
		Subtest 2	4132	826.4	0	23.4	
			4183	836.6	0	23.3	
			4233	846.6	0	23.4	
		Subtest 3	4132	826.4	0.5	22.7	
			4183	836.6	0.5	23.0	
			4233	846.6	0.5	23.0	
		Subtest 4	4132	826.4	0.5	22.4	
			4183	836.6	0.5	22.3	
			4233	846.6	0.5	22.4	
		HSUPA	Subtest 1	4132	826.4	0	22.3
				4183	836.6	0	22.2
				4233	846.6	0	22.4
	Subtest 2		4132	826.4	2	21.5	
			4183	836.6	2	21.4	
			4233	846.6	2	21.5	
	Subtest 3		4132	826.4	1	22.4	
			4183	836.6	1	22.3	
			4233	846.6	1	22.4	
	Subtest 4		4132	826.4	2	21.5	
			4183	836.6	2	21.4	
			4233	846.6	2	21.5	
	Subtest 5		4132	826.4	0	23.0	
			4183	836.6	0	23.0	
			4233	846.6	0	23.0	

9.3. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 5 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						829 MHz	836.5 MHz	844 MHz
LTE Band 5	10	QPSK	1	0	0	23.9	23.8	23.9
			1	25	0	23.9	23.8	23.8
			1	49	0	24.0	23.9	23.8
			25	0	1	22.4	22.4	22.6
			25	12	1	22.5	22.4	22.6
			25	25	1	22.5	22.3	22.5
		16QAM	1	0	1	23.0	23.2	23.2
			1	25	1	23.0	23.1	23.3
			1	49	1	23.0	23.0	23.2
			25	0	2	21.4	21.4	21.5
			25	12	2	21.4	21.4	21.5
			25	25	2	21.4	21.3	21.4
			50	0	2	21.4	21.2	21.5
			50	0	2	21.4	21.2	21.5
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						826.5 MHz	836.5 MHz	846.5 MHz
LTE Band 5	5	QPSK	1	0	0	23.9	24.0	23.9
			1	12	0	23.8	24.0	23.9
			1	24	0	23.8	23.9	23.9
			12	0	1	22.5	22.5	22.4
			12	7	1	22.4	22.4	22.5
			12	13	1	22.4	22.4	22.5
		16QAM	25	0	1	22.5	22.4	22.4
			1	0	1	23.3	23.0	22.6
			1	12	1	23.2	23.0	22.7
			1	24	1	23.3	23.0	22.6
			12	0	2	21.4	21.3	21.4
			12	7	2	21.3	21.2	21.4
			12	13	2	21.3	21.2	21.3
			25	0	2	21.5	21.2	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						825.5 MHz	836.5 MHz	847.5 MHz
LTE Band 5	3	QPSK	1	0	0	23.9	24.0	23.9
			1	8	0	23.9	23.9	23.9
			1	14	0	23.9	23.9	23.8
			8	0	1	22.6	22.5	22.6
			8	4	1	22.6	22.6	22.6
			8	7	1	22.5	22.5	22.5
			15	0	1	22.5	22.5	22.5
		16QAM	1	0	1	23.0	23.2	23.4
			1	8	1	22.9	23.1	23.3
			1	14	1	22.9	23.1	23.3
			8	0	2	21.5	21.3	21.4
			8	4	2	21.5	21.3	21.4
			8	7	2	21.5	21.2	21.4
			15	0	2	21.3	21.3	21.3

LTE Band 5 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	Target MPR	Max. Avg Pwr (dBm)		
						824.7 MHz	836.5 MHz	848.3 MHz
LTE Band 5	10	QPSK	1	0	0	24.0	23.8	23.9
			1	3	0	24.0	23.8	23.8
			1	5	0	24.0	23.8	23.8
			3	0	0	23.9	23.6	23.8
			3	1	0	23.9	23.7	23.7
			3	3	0	23.8	23.7	23.7
			6	0	1	22.7	22.5	22.6
		16QAM	1	0	1	23.2	23.0	23.1
			1	3	1	23.2	23.0	23.1
			1	5	1	23.2	23.0	23.1
			3	0	1	22.9	22.6	22.9
			3	1	1	22.8	22.5	22.8
			3	3	1	22.8	22.6	22.7
			6	0	2	21.6	21.4	21.5

9.4. Wi-Fi 2.4GHz (DTS Band)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
2.4	802.11b	1 Mbps	1	2412	17.1	17.5	Yes	
			6	2437	17.5			
			11	2462	17.1			
	802.11g	6 Mbps	1	2412	Not Required	16.5	No	1
			6	2437				
			11	2462				
	802.11n (HT20)	6.5 Mbps	1	2412	Not Required	12.5	No	1
			6	2437				
			11	2462				

Note(s):

- Output Power and SAR is not required for 802.11g/n HT20 channels when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

9.5. Wi-Fi 5GHz (U-NII Bands)

Band (GHz)	Mode	Data Rate	Ch #	Freq. (MHz)	Avg Pwr (dBm)	Max Output Power (dBm)	SAR Test (Yes/No)	Note(s)
5.2 (U-NII 1)	802.11a	6 Mbps	36 ~ 48	5180 ~ 5240	Not Required	12.5	No	1
	802.11n (HT20)	6.5 Mbps	36 ~ 48	5180 ~ 5240		12.5	No	1
	802.11n (HT40)	13.5 Mbps	38 ~ 46	5190 ~ 5230		12.5	No	1
	802.11ac (VHT20)	6.5 Mbps	36 ~ 48	5180 ~ 5240		12.5	No	1
	802.11ac (VHT40)	13.5 Mbps	38 ~ 46	5190 ~ 5230		12.5	No	1
	802.11ac (VHT80)	29.3 Mbps	42	5210	12.1	12.5	No	1
5.3 UNII-2A	802.11a	6 Mbps	52 ~ 64	5260 ~ 5320	Not Required	12.5	No	2
	802.11n (HT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		12.5	No	2
	802.11n (HT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310		12.5	No	2
	802.11ac (VHT20)	6.5 Mbps	52 ~ 64	5260 ~ 5320		12.5	No	2
	802.11ac (VHT40)	13.5 Mbps	54 ~ 62	5270 ~ 5310		12.5	No	2
	802.11ac (VHT80)	29.3 Mbps	58	5290	11.9	12.5	Yes	
5.5 UNII-2C	802.11a	6 Mbps	100 ~ 144	5500 ~ 5720	Not Required	12.5	No	2
	802.11n (HT20)	6.5 Mbps	100 ~ 144	5500 ~ 5720		12.5	No	2
	802.11n (HT40)	13.5 Mbps	102 ~ 142	5510 ~ 5710		12.5	No	2
	802.11ac (VHT20)	6.5 Mbps	100 ~ 144	5500 ~ 5720		12.5	No	2
	802.11ac (VHT40)	13.5 Mbps	102 ~ 142	5510 ~ 5710		12.5	No	2
	802.11ac (VHT80)	29.3 Mbps	106 122 138	5530 5610 5690	12.5 11.9 12.5	12.5	Yes	
5.8 UNII-3 or §15.247	802.11a	6 Mbps	149 ~ 165	5745 ~ 5825	Not Required	12.5	No	2
	802.11n (HT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		12.5	No	2
	802.11n (HT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		12.5	No	2
	802.11ac (VHT20)	6.5 Mbps	149 ~ 165	5745 ~ 5825		12.5	No	2
	802.11ac (VHT40)	13.5 Mbps	151 ~ 159	5755 ~ 5795		12.5	No	2
	802.11ac (VHT80)	29.3 Mbps	155	5775	12.1	12.5	Yes	

Note(s):

- Output Power and SAR measurement is not required for 802.11n HT20/HT40/HT80 channels when the specified tune-up tolerances for 802.11n HT20/HT40/HT80 are lower than 802.11a by more than ½ dB and the measured SAR is ≤ 1.2 W/Kg.
- When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.
- When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is
 - ≤ 1.2 W/kg, SAR is not required for UNII band I
 - > 1.2 W/kg, both bands should be tested independently for SAR.

9.6. Bluetooth

Maximum tune-up tolerance limit is 8.5 dBm from the rated nominal maximum output power. This power level qualifies for exclusion of SAR testing.

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D01 SAR test for 3G devices:

When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.

KDB 248227 D01 SAR meas for 802.11 v02:

SAR test reduction for 802.11 Wi-Fi transmission mode configurations are considered separately for DSSS and OFDM. An initial test position is determined to reduce the number of tests required for certain exposure configurations with multiple test positions. An initial test configuration is determined for each frequency band and aggregated band according to maximum output power, channel bandwidth, wireless mode configurations and other operating parameters to streamline the measurement requirements. For 2.4 GHz DSSS, either the initial test position or DSSS procedure is applied to reduce the number of SAR tests; these are mutually exclusive. For OFDM, an initial test position is only applicable to next to the ear, UMPC mini-tablet and hotspot mode configurations, which is tested using the initial test configuration to facilitate test reduction. For other exposure conditions with a fixed test position, SAR test reduction is determined using only the initial test configuration.

The multiple test positions require SAR measurements in head, hotspot mode or UMPC mini-tablet configurations may be reduced according to the highest reported SAR determined using the *initial test position(s)* by applying the DSSS or OFDM SAR measurement procedures in the required wireless mode test configuration(s). The *initial test position(s)* is measured using the highest measured maximum output power channel in the required wireless mode test configuration(s). When the *reported* SAR for the *initial test position* is:

- ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and wireless mode combination within the frequency band or aggregated band. DSSS and OFDM configurations are considered separately according to the required SAR procedures.
- > 0.4 W/kg, SAR is repeated using the same wireless mode test configuration tested in the *initial test position* to measure the subsequent next closet/smallest test separation distance and maximum coupling test position, on the highest maximum output power channel, until the *reported* SAR is ≤ 0.8 W/kg or all required test positions are tested.

- For subsequent test positions with equivalent test separation distance or when exposure is dominated by coupling conditions, the position for maximum coupling condition should be tested.
- When it is unclear, all equivalent conditions must be tested.
- For all positions/configurations tested using the *initial test position* and subsequent test positions, when the *reported* SAR is > 0.8 W/kg, measure the SAR for these positions/configurations on the subsequent next highest measured output power channel(s) until the *reported* SAR is \leq 1.2 W/kg or all required test channels are considered.
 - The additional power measurements required for this step should be limited to those necessary for identifying subsequent highest output power channels to apply the test reduction.
- When the specified maximum output power is the same for both UNII 1 and UNII 2A, begin SAR measurements in UNII 2A with the channel with the highest measured output power. If the reported SAR for UNII 2A is \leq 1.2 W/kg, SAR is not required for UNII 1; otherwise treat the remaining bands separately and test them independently for SAR.
- When the specified maximum output power is different between UNII 1 and UNII 2A, begin SAR with the band that has the higher specified maximum output. If the highest reported SAR for the band with the highest specified power is \leq 1.2 W/kg, testing for the band with the lower specified output power is not required; otherwise test the remaining bands independently for SAR.

To determine the *initial test position*, Area Scans were performed to determine the position with the *Maximum Value of SAR (measured)*. The position that produced the highest *Maximum Value of SAR* is considered the worst case position; thus used as the *initial test position*.

10.1. GSM850

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
						Tune-up limit	Meas.	Meas.	Scaled		
Head	Voice	0	Left Touch	190	836.6	33.0	32.9	0.659	0.674		
			Left Tilt	190	836.6	33.0	32.9	0.350	0.358		
			Right Touch	190	836.6	33.0	32.9	0.460	0.471		
			Rightt Tilt	190	836.6	33.0	32.9	0.320	0.327		
Head (VoIP)	GPRS 3 Slots	0	Left Touch	128	824.2	30.0	29.9	0.873	0.893	1	
				190	836.6	30.0	29.9	0.908	0.929		
				251	848.8	30.0	30.0	0.865	0.865		
			Left Tilt	190	836.6	30.0	29.9	0.520	0.532		
				Right Touch	190	836.6	30.0	29.9	0.633	0.648	
				Righttt Tilt	190	836.6	30.0	29.9	0.480	0.491	
Body	Voice	10	Rear	190	836.6	33.0	32.9	0.661	0.676		
			Front	190	836.6	33.0	32.9	0.610	0.624		
Body (VoIP) & Hotspot	GPRS 3 Slots	10	Rear	128	824.2	30.0	29.9	0.948	0.970	2	
				190	836.6	30.0	29.9	0.933	0.955		
				251	848.8	30.0	30.0	0.875	0.875		
			Front	128	824.2	30.0	29.9	0.813	0.832		
				190	836.6	30.0	29.9	0.875	0.895		
				251	848.8	30.0	30.0	0.735	0.735		
Hotspot			Edge 3	190	836.6	30.0	29.9	0.429	0.439		
			Edge 4	128	824.2	30.0	29.9	0.781	0.799		

10.2. GSM1900

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.	
						Tune-up limit	Meas.	Meas.	Scaled		
Head	Voice	0	Left Touch	661	1880.0	30.0	30.0	0.230	0.230		
			Left Tilt	661	1880.0	30.0	30.0	0.067	0.067		
			Right Touch	661	1880.0	30.0	30.0	0.146	0.146		
			Righttt Tilt	661	1880.0	30.0	30.0	0.101	0.101		
Head (VoIP)	GPRS 2 Slots	0	Left Touch	661	1880.0	28.5	28.2	0.301	0.323	3	
			Left Tilt	661	1880.0	28.5	28.2	0.084	0.089		
			Right Touch	661	1880.0	28.5	28.2	0.179	0.192		
			Righttt Tilt	661	1880.0	28.5	28.2	0.121	0.130		
Body	Voice	10	Rear	661	1880.0	30.0	30.0	0.578	0.578		
			Front	661	1880.0	30.0	30.0	0.789	0.789		
Body (VoIP) & Hotspot	GPRS 2 Slots	10	Rear	661	1880.0	28.5	28.2	0.696	0.746	4	
				Front	512	1850.2	28.5	28.4	0.981		1.004
					661	1880.0	28.5	28.2	0.979		1.049
Hotspot			Edge 3	810	1909.8	28.5	28.3	0.854	0.894		
				512	1850.2	28.5	28.4	0.746	0.763		
			Edge 4	661	1880.0	28.5	28.2	0.770	0.825		
				810	1909.8	28.5	28.3	0.516	0.540		

10.3. W-CDMA Band V

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	4183	836.6	23.5	23.1	0.538	0.590	5
			Left Tilt	4183	836.6	23.5	23.1	0.311	0.341	
			Right Touch	4183	836.6	23.5	23.1	0.396	0.434	
			Right Tilt	4183	836.6	23.5	23.1	0.284	0.311	
Body-worn & Hptspot	Rel 99 RMC	10	Rear	4183	836.6	23.5	23.1	0.556	0.610	
			Front	4183	836.6	23.5	23.1	0.512	0.561	
Hotspot	Rel 99 RMC	10	Edge 3	4183	836.6	23.5	23.1	0.270	0.296	
			Edge 4	4183	836.6	23.5	23.1	0.596	0.654	

10.4. W-CDMA Band II

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Power (dBm)		1-g SAR (W/kg)		Plot No.
						Tune-up limit	Meas.	Meas.	Scaled	
Head	Rel 99 RMC	0	Left Touch	9400	1880.0	24.2	23.8	0.377	0.413	7
			Left Tilt	9400	1880.0	24.2	23.8	0.121	0.133	
			Right Touch	9400	1880.0	24.2	23.8	0.207	0.227	
			Right Tilt	9400	1880.0	24.2	23.8	0.162	0.178	
Body-worn & Hptspot	Rel 99 RMC	10	Rear	9400	1880.0	24.2	23.8	0.585	0.641	8
			Front	9262	1852.4	24.2	23.8	0.906	0.993	
				9400	1880.0	24.2	23.8	0.897	0.984	
				9538	1907.6	24.2	23.6	0.749	0.860	
Hotspot	Rel 99 RMC	10	Edge 3	9400	1880.0	24.2	23.8	0.691	0.758	
			Edge 4	9400	1880.0	24.2	23.8	0.214	0.235	

10.5. LTE Band 5 (10MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	20525	836.5	1	49	24.5	23.9	0.654	0.751	9
						25	12	23.5	22.4	0.435	0.557	
			Left Tilt	20525	836.5	1	49	24.5	23.9	0.378	0.434	
						25	12	23.5	22.4	0.262	0.335	
			Right Touch	20525	836.5	1	49	24.5	23.9	0.463	0.532	
						25	12	23.5	22.4	0.329	0.421	
			Right Tilt	20525	836.5	1	49	24.5	23.9	0.353	0.405	
						25	12	23.5	22.4	0.230	0.294	
Body-worn & Hotspot	QPSK	10	Rear	20525	836.6	1	49	24.5	23.9	0.654	0.751	10
						25	12	23.5	22.4	0.488	0.624	
			Front	20525	836.5	1	49	24.5	23.9	0.604	0.693	
						25	12	23.5	22.4	0.458	0.586	
Hotspot	QPSK	10	Edge 3	20525	836.5	1	49	24.5	23.9	0.325	0.373	
						25	12	23.5	22.4	0.245	0.313	
			Edge 4	20525	836.5	1	49	24.5	23.9	0.523	0.600	
						25	12	23.5	22.4	0.392	0.502	

10.6. Wi-Fi (DTS Band)

Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
							Tune-up limit	Meas.	Meas.	Scaled	
802.11b 1 Mbps	Head	0	Left Touch	6	2437.0	0.270	17.5	17.5	0.194	0.196	
			Left Tilt	6	2437.0	0.141	17.5	17.5			
			Right Touch	6	2437.0	0.590	17.5	17.5	0.461	0.466	11
			Right Tilt	6	2437.0	0.225	17.5	17.5			
	Body-worn & Hotspot & Wi-Fi Direct	10	Rear	6	2437.0	0.252	17.5	17.5	0.190	0.192	12
			Front	6	2437.0	0.140	17.5	17.5			
			Edge 4	6	2437.0	0.180	17.5	17.5			

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.7. Wi-Fi (U-NII Band)

Frequency Band	Mode	RF Exposure Conditions	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	Area Scan Max. SAR (W/kg)	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
5.3 GHz U-NII 2A	802.11ac 29.3Mbps	Head	0	Left Touch	58	5290.0	0.078	12.5	11.9			
				Left Tilt	58	5290.0	0.074	12.5	11.9			
				Right Touch	58	5290.0	0.114	12.5	11.9	0.113	0.129	13
				Right Tilt	58	5290.0	0.080	12.5	11.9			
		Body-worn	10	Rear	58	5290.0	0.577	12.5	11.9	0.347	0.397	14
				Front	58	5290.0	0.014	12.5	11.9			
5.5 GHz U-NII 2C	802.11ac 29.3Mbps	Head	0	Left Touch	106	5530.0	0.103	12.5	12.5			
				Left Tilt	106	5530.0	0.103	12.5	12.5	0.110	0.110	15
				Right Touch	106	5530.0	0.091	12.5	12.5			
				Right Tilt	106	5530.0	0.074	12.5	12.5			
		Body-worn	10	Rear	106	5530.0	0.229	12.5	12.5	0.145	0.145	16
				Front	106	5530.0	0.013	12.5	12.5			
5.8 GHz U-NII 3	802.11ac 29.3Mbps	Head	0	Left Touch	155	5775.0	0.204	12.5	12.1	0.188	0.206	17
				Left Tilt	155	5775.0	0.119	12.5	12.1			
				Right Touch	155	5775.0	0.096	12.5	12.1			
				Right Tilt	155	5775.0	0.085	12.5	12.1			
		Body-worn & Hotspot & Wi-Fi Direct	10	Rear	155	5775.0	0.185	12.5	12.1	0.071	0.077	18
				Front	155	5775.0	0.043	12.5	12.1			
			Edge 4	155	5775.0	0.099	12.5	12.1				

Note(s):

1. Highest reported SAR is ≤ 0.4 W/kg. Therefore, further SAR measurements within this exposure condition are not required.
2. Highest reported SAR is > 0.4 W/kg. Due to the highest reported SAR for this test position, other test positions in Head exposure condition were evaluated until a SAR ≤ 0.8 W/kg was reported.
3. Testing for a second channel was required because the reported SAR for this test position was >0.8 W/kg.
4. Additional testing required in order satisfying FCC simultaneous transmission limit criteria.

10.8. Bluetooth

Standalone SAR Test Exclusion Considerations & Estimated SAR

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$, for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f_{(\text{GHz})}$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f_{(\text{GHz})}/x}] \text{ W/kg}$ for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
- 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Body-worn Accessory Exposure Conditions

Max. tune-up tolerance limit		Min. test separation distance (mm)	Frequency (GHz)	SAR test exclusion Result*	Test Configuration	Estimated 1-g SAR (W/kg)
(dBm)	(mW)					
8.5	7	10	2.480	1.1	Rear/Front	0.147

Conclusion:

*: The computed value is < 3 ; therefore, Bluetooth qualifies for Standalone SAR test exclusion.

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Repeated Measured SAR (W/kg)	Largest to Smallest SAR Ratio
850	GSM 850	Hotspot	Edge 4	Yes	0.948	0.908	1.04
	WCDMA Band V	Hotspot	Edge 4	No	0.596	N/A	N/A
	LTE Band 5	Body & Hotspot	Rear	No	0.654	N/A	N/A
1900	GSM 1900	Body & Hotspot	Front	Yes	0.981	0.984	1.00
	WCDMA Band II	Hotspot	Edge 3	No	0.906	N/A	N/A
2400	Wi-Fi 802.11b/g/n	Head	Right Touch	No	0.461	N/A	N/A
5300	Wi-Fi 802.11a/n/ac	Body	Rear	No	0.347	N/A	N/A
5500	Wi-Fi 802.11a/n/ac	Body	Rear	No	0.145	N/A	N/A
5800	Wi-Fi 802.11a/n/ac	Head	Left Touch	No	0.188	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .

12. Simultaneous Transmission SAR Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SAR to Peak Location Ratio (SPLSR) between pairs of simultaneously transmitting antennas:

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / Ri$$

Where:

SAR₁ is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition

SAR₂ is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first

Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$(SAR_1 + SAR_2)^{1.5} / Ri < 0.04$$

Simultaneous Transmission Condition

RF Exposure Condition	Item	Capable Transmit Configurations		
Head	1	GSM(Voice)	+	DTS
	2	GSM(Voice)	+	U-NII
	3	GSM(GPRS/EDGE)	+	DTS
	4	GSM(GPRS/EDGE)	+	U-NII
	5	W-CDMA	+	DTS
	6	W-CDMA	+	U-NII
	7	LTE	+	DTS
	8	LTE	+	U-NII
Body-w orn	9	GSM(Voice)	+	DTS
	10	GSM(Voice)	+	U-NII
	11	GSM(Voice)	+	BT
	12	GSM(GPRS/EDGE)	+	DTS
	13	GSM(GPRS/EDGE)	+	U-NII
	14	GSM(GPRS/EDGE)	+	BT
	15	W-CDMA	+	DTS
	16	W-CDMA	+	U-NII
	17	W-CDMA	+	BT
	18	LTE	+	DTS
	19	LTE	+	U-NII
	20	LTE	+	BT
Hotspot & Wi-Fi Direct	21	GSM(GPRS/EDGE)	+	DTS
	22	GSM(GPRS/EDGE)	+	U-NII
	23	W-CDMA	+	DTS
	24	W-CDMA	+	U-NII
	25	LTE	+	DTS
	26	LTE	+	U-NII
Notes:				
<ol style="list-style-type: none"> 1. DTS, U-NII 3 supports Hotspot and Wi-Fi Direct. 2. GPRS/EDGE, W-CDMA and LTE support Hotspot. 3. VoIP is supported in GPRS/EDGE, W-CDMA and LTE. 4. DTS Radio cannot transmit simultaneously with Bluetooth Radio. 5. U-NII Radio cannot transmit simultaneously with Bluetooth Radio. 				

12.1. Sum of the SAR for GSM850 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
						Head	Left Touch	0.929	0.196	0.206	
	Left Tilt	0.532	0.466	0.110		0.998	No	0.642	No		
	Right Touch	0.648	0.466	0.129		1.114	No	0.777	No		
	Right Tilt	0.491	0.466	0.206		0.957	No	0.697	No		
Body-worn & Hotspot	Rear	0.970	0.192	0.397	0.147	1.162	No	1.367	No	1.117	No
	Front	0.895	0.192	0.397	0.147	1.087	No	1.292	No	1.042	No
Hotspot	Edge 1										
	Edge 2										
	Edge 3	0.439	0.192	0.397		0.631	No	0.836	No		
	Edge 4	0.799	0.192	0.397		0.991	No	1.196	No		

12.2. Sum of the SAR for GSM1900 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
						Head	Left Touch	0.323	0.196	0.206	
	Left Tilt	0.089	0.466	0.110		0.555	No	0.199	No		
	Right Touch	0.192	0.466	0.129		0.658	No	0.321	No		
	Right Tilt	0.130	0.466	0.206		0.596	No	0.336	No		
Body-worn & Hotspot	Rear	0.746	0.192	0.397	0.147	0.938	No	1.143	No	0.893	No
	Front	1.049	0.192	0.397	0.147	1.241	No	1.446	No	1.196	No
Hotspot	Edge 1										
	Edge 2										
	Edge 3	0.825	0.192	0.397		1.017	No	1.222	No		
	Edge 4	0.203	0.192	0.397		0.395	No	0.600	No		

12.3. Sum of the SAR for WCDMA Band V & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.590	0.196	0.206		0.786	No	0.796	No		
	Left Tilt	0.341	0.466	0.110		0.807	No	0.451	No		
	Right Touch	0.434	0.466	0.129		0.900	No	0.563	No		
	Right Tilt	0.311	0.466	0.206		0.777	No	0.517	No		
Body-worn & Hotspot	Rear	0.610	0.192	0.397	0.147	0.802	No	1.007	No	0.757	No
	Front	0.561	0.192	0.397	0.147	0.753	No	0.958	No	0.708	No
Hotspot	Edge 1										
	Edge 2										
	Edge 3	0.296	0.192	0.397		0.488	No	0.693	No		
	Edge 4	0.654	0.192	0.397		0.846	No	1.051	No		

12.4. Sum of the SAR for WCDMA Band II & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.413	0.196	0.206		0.609	No	0.619	No		
	Left Tilt	0.133	0.466	0.110		0.599	No	0.243	No		
	Right Touch	0.227	0.466	0.129		0.693	No	0.356	No		
	Right Tilt	0.178	0.466	0.206		0.644	No	0.384	No		
Body-worn & Hotspot	Rear	0.641	0.192	0.397	0.147	0.833	No	1.038	No	0.788	No
	Front	0.993	0.192	0.397	0.147	1.185	No	1.390	No	1.140	No
Hotspot	Edge 1										
	Edge 2										
	Edge 3	0.758	0.192	0.397		0.950	No	1.155	No		
	Edge 4	0.235	0.192	0.397		0.427	No	0.632	No		

12.5. Sum of the SAR for LTE Band 5 & Wi-Fi & BT

RF Exposure conditions	Test Position	① WWAN	② DTS	③ U-NII	④ BT	① + ② WWAN + DTS		① + ③ WWAN + U-NII		① + ④ WWAN + BT	
						∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)	∑ 1-g SAR (mW/g)	SPLSR (Yes/ No)
Head	Left Touch	0.751	0.196	0.206		0.947	No	0.957	No		
	Left Tilt	0.434	0.466	0.110		0.900	No	0.544	No		
	Right Touch	0.532	0.466	0.129		0.998	No	0.661	No		
	Right Tilt	0.405	0.466	0.206		0.871	No	0.611	No		
Body-worn & Hotspot	Rear	0.751	0.192	0.397	0.147	0.943	No	1.148	No	0.898	No
	Front	0.693	0.192	0.397	0.147	0.885	No	1.090	No	0.840	No
Hotspot	Edge 1										
	Edge 2										
	Edge 3	0.373	0.192	0.397		0.565	No	0.770	No		
	Edge 4	0.600	0.192	0.397		0.792	No	0.997	No		

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is < 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

A_15K21054 SAR Photos & Ant. Locations

B_15K21054 SAR Highest Test Plots

C_15K21054 SAR System Check Plots

D_15K21054 SAR Tissue Ingredients

E_15K21054 SAR Probe Cal. Certificates

F_15K21054 SAR Dipole Cal. Certificates

END OF REPORT