



# PCTEST ENGINEERING LABORATORY, INC.

7185 Oakland Mills Road, Columbia, MD 21046 USA

Tel. 410.290.6652 / Fax 410.290.6654

http://www.pctestlab.com



## MEASUREMENT REPORT FCC PART 15.247 Bluetooth (Low Energy)

**Applicant Name:**  
Samsung Electronics Co., Ltd.  
129, Samsung-ro,  
Yeongtong-gu, Suwon-si  
Gyeonggi-do, 16677, Korea


**Date of Testing:**  
3/13 - 3/24/2017  
**Test Site/Location:**  
PCTEST Lab, Columbia, MD, USA  
**Test Report Serial No.:**  
1M1703100103-07.A3L

|                   |                                      |
|-------------------|--------------------------------------|
| <b>FCC ID:</b>    | <b>A3LSMG950N</b>                    |
| <b>APPLICANT:</b> | <b>Samsung Electronics Co., Ltd.</b> |



**Application Type:** Class II Permissive Change  
**Model:** SM-G950N  
**EUT Type:** Portable Handset  
**Frequency Range:** 2402 - 2480 MHz  
**FCC Classification:** Digital Transmission System (DTS)  
**FCC Rule Part(s):** Part 15.247  
**Test Procedure(s):** KDB 558074 D01 v03r05, KDB 648474 D03 v01r04  
**Class II Permissive Change:** Please see FCC change document  
**Original Grant Date:** 3/10/2017

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 558074 D01 v03r05. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

  
 Randy Ortanez  
 President



|  |   |   |   |  |
|--|---|---|---|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 1 of 19  |  |

© 2017 PCTEST Engineering Laboratory, Inc.



V 6.2


01/09/2016

© 2017 PCTEST Engineering Laboratory, Inc. All rights reserved. Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from PCTEST Engineering Laboratory, Inc. If you have any questions about this international copyright or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact INFO@PCTESTLAB.COM.

## TABLE OF CONTENTS


|   |  |    |
|---|--|----|
| FCC PART 15.247 MEASUREMENT REPORT .....            |  | 3  |
| 1.0 INTRODUCTION.....                               |  | 4  |
| 1.1 Scope .....                                     |  | 4  |
| 1.2 PCTEST Test Location.....                       |  | 4  |
| 2.0 PRODUCT INFORMATION .....                       |  | 5  |
| 2.1 Equipment Description .....                     |  | 5  |
| 2.2 Device Capabilities.....                        |  | 5  |
| 2.3 Test Configuration .....                        |  | 5  |
| 2.4 EMI Suppression Device(s)/Modifications .....   |  | 5  |
| 3.0 DESCRIPTION OF TESTS .....                      |  | 6  |
| 3.1 Evaluation Procedure .....                      |  | 6  |
| 3.2 Radiated Emissions.....                         |  | 6  |
| 3.3 Environmental Conditions .....                  |  | 6  |
| 4.0 ANTENNA REQUIREMENTS .....                      |  | 7  |
| 5.0 MEASUREMENT UNCERTAINTY .....                   |  | 8  |
| 6.0 TEST EQUIPMENT CALIBRATION DATA.....            |  | 9  |
| 7.0 TEST RESULTS .....                              |  | 10 |
| 7.1 Summary.....                                    |  | 10 |
| 7.2 Radiated Spurious Emission Measurements.....    |  | 11 |
| 7.3 Radiated Restricted Band Edge Measurements..... |  | 15 |
| 8.0 CONCLUSION .....                                |  | 19 |

|  |   |   |   |  |
|--|---|---|---|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 2 of 19  |  |



# MEASUREMENT REPORT

## FCC Part 15.247



### § 2.1033 General Information

**APPLICANT:** Samsung Electronics Co., Ltd.

**APPLICANT ADDRESS:** 129, Samsung-ro,  
Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Korea

**TEST SITE:** PCTEST ENGINEERING LABORATORY, INC.

**TEST SITE ADDRESS:** 7185 Oakland Mills Road, Columbia, MD 21046 USA

**FCC RULE PART(S):** Part 15.247

**BASE MODEL:** SM-G950N

**FCC ID:** A3LSMG950N

**FCC CLASSIFICATION:** Digital Transmission System (DTS)



**Test Device Serial No.:** E3D05       Production     Pre-Production     Engineering

**DATE(S) OF TEST:** 3/13 - 3/24/2017

**TEST REPORT S/N:** 1M1703100103-07.A3L

### Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 159966) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (2451B-1).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (2451B-1) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

|  |  |   |              |  |
|--|--|---|--------------|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT</b><br><b>(CLASS II PERMISSIVE CHANGE)</b> |              | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017 | <b>EUT Type:</b><br>Portable Handset  | Page 3 of 19 |  |

# 1.0 INTRODUCTION

## 1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

## 1.2 PCTEST Test Location

The map below shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity area, the Baltimore-Washington Intern't'l (BWI) airport, the city of Baltimore and the Washington, DC area. (See Figure 1-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The site coordinates are 39° 10'23" N latitude and 76° 49'50" W longitude. The facility is 0.4 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2014 on January 22, 2015.

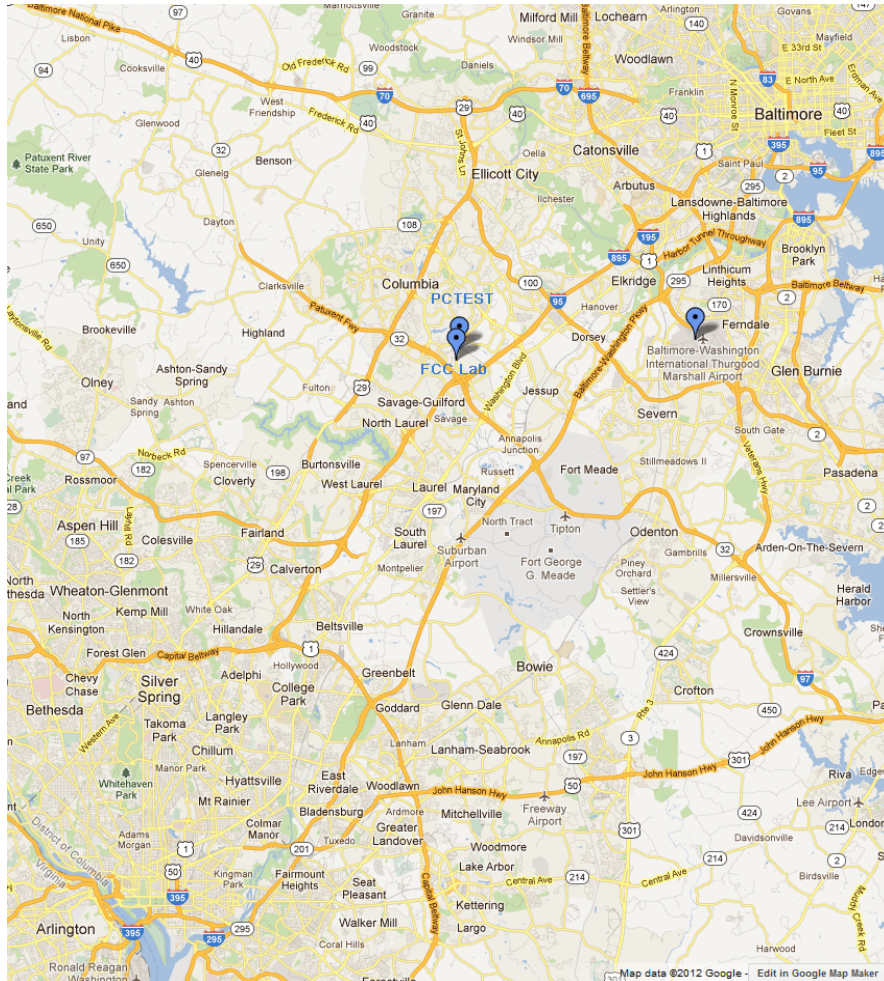


Figure 1-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

|   |                                 |   |  |                                 |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   |  | Page 4 of 19                    |

## 2.0 PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG950N**. The data found in this test report was taken with the EUT operating in Bluetooth low energy mode. While in low energy mode, the Bluetooth transmitter hops pseudo-randomly between 40 channels, three of which are “advertising channels”. When the transmitter is hopping only between the three advertising channels, the EUT does not fall under the category of a “hopper” as defined in 15.247(a)(iii) which states that a “frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.” As operation on only the advertising channels does not qualify the EUT as a hopper, the EUT is certified as a DTS device in this mode. The data found in this report is representative of the device when it transmits on its advertising channels. Typical Bluetooth operation is covered under the DSS report found with this application.

### 2.2 Device Capabilities

This device contains the following capabilities:

1900 GSM/GPRS/EDGE, 850/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n WLAN, 802.11a/n/ac UNII, Bluetooth (1x, EDR, LE), NFC, ANT+

| Ch. | Frequency (MHz) |
|-----|-----------------|
| 0   | 2402            |
| :   | :               |
| 19  | 2440            |
| :   | :               |
| 39  | 2480            |

Table 2-1. Frequency / Channel Operations

Note: This device supports Bluetooth LE operations with 1Mbps and 2Mbps data rates.



### 2.3 Test Configuration

The EUT was tested per the guidance of KDB 558074 D01 v03r05. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing. See Section 3.2 for radiated emissions test setups.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on a certified wireless charging pad (WCP) while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

### 2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 5 of 19  |                                 |

## 3.0 DESCRIPTION OF TESTS

### 3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 558074 D01 v03r05 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

### 3.2 Radiated Emissions



The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. A 72.4cm high PVC support structure is placed on top of the turntable. A 3" (~7.6cm) sheet of high density polystyrene is used as the table top and is placed on top of the PVC supports to bring the total height of the table to 80cm. For measurements above 1GHz, a high density expanded polystyrene block is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

### 3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 6 of 19  |                                 |

## 4.0 ANTENNA REQUIREMENTS



**Excerpt from §15.203 of the FCC Rules/Regulations:**

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna(s) of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

**Conclusion:**



The EUT complies with the requirement of §15.203.

|  |   |   |   |  |
|--|---|---|---|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 7 of 19  |  |

## 5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of  $k = 2$  to indicate a 95% level of confidence. The measurement data shown herein meets or exceeds the  $U_{CISPR}$  measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

| Contribution                     | Expanded Uncertainty ( $\pm$ dB) |
|----------------------------------|----------------------------------|
| Conducted Bench Top Measurements | 1.13                             |
| Line Conducted Disturbance       | 3.09                             |
| Radiated Disturbance (<1GHz)     | 4.98                             |
| Radiated Disturbance (>1GHz)     | 5.07                             |
| Radiated Disturbance (>18GHz)    | 5.09                             |



|  |   |   |   |  |
|--|---|---|---|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 8 of 19  |  |

## 6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2006.

| Manufacturer    | Model              | Description                            | Cal Date  | Cal Interval | Cal Due   | Serial Number        |
|-----------------|--------------------|--|-----------|--------------|-----------|----------------------|
| -               | RE1                | Radiated Emissions Cable Set (UHF/EHF) | 7/11/2016 | Annual       | 7/11/2017 | RE1                  |
| Com-Power       | AL-130             | 9kHz - 30MHz Loop Antenna              | 7/30/2015 | Biennial     | 7/30/2017 | 121034               |
| Com-Power       | PAM-103            | Pre-Amplifier (1-1000MHz)              | 7/6/2016  | Annual       | 7/6/2017  | 441119               |
| Com-Power       | PAM-103            | Pre-Amplifier (1-1000MHz)              | 7/11/2016 | Annual       | 7/11/2017 | 441128               |
| Emco            | 3115               | Horn Antenna (1-18GHz)                 | 3/10/2016 | Biennial     | 3/10/2018 | 9704-5182            |
| EMCO            | 3160-09            | Small Horn (18 - 26.5GHz)              | 8/23/2016 | Biennial     | 8/23/2018 | 135427               |
| Huber+Suhner    | Sucoflex 102A      | 40GHz Radiated Cable                   | 10/3/2016 | Annual       | 10/3/2017 | 251425001            |
| K & L           | 11SH10-3075/U18000 | High Pass Filter                       | 7/11/2016 | Annual       | 7/11/2017 | 11SH10-3075/U18000-2 |
| K & L           | 11SH10-3075/U18000 | High Pass Filter                       | 7/6/2016  | Annual       | 7/6/2017  | 11SH10-3075/U18000-1 |
| PCTEST          | -                  | EMC Switch System                      | 7/11/2016 | Annual       | 7/11/2017 | NM1                  |
| PCTEST          | -                  | EMC Switch System                      | 7/6/2016  | Annual       | 7/6/2017  | NM2                  |
| Rhode & Schwarz | TS-PR18            | Pre-Amplifier                          | 7/6/2016  | Annual       | 7/6/2017  | 101622               |
| Rohde & Schwarz | TS-PR18            | 1-18 GHz Pre-Amplifier                 | 7/11/2016 | Annual       | 7/11/2017 | 100071               |
| Rohde & Schwarz | TS-PR26            | 18-26.5 GHz Pre-Amplifier              | 4/7/2016  | Annual       | 4/7/2017  | 100040               |
| Rohde & Schwarz | ESU26              | EMI Test Receiver (26.5GHz)            | 5/16/2016 | Annual       | 5/16/2017 | 100342               |
| Rohde & Schwarz | ESU40              | EMI Test Receiver (40GHz)              | 7/15/2016 | Annual       | 7/15/2017 | 100348               |
| Seekonk         | NC-100             | Torque Wrench 5/16", 8" lbs            | 3/2/2016  | Biennial     | 3/2/2018  | N/A                  |
| Sunol           | DRH-118            | Horn Antenna (1-18GHz)                 | 7/30/2015 | Biennial     | 7/30/2017 | A050307              |
| Sunol           | JB5                | Bi-Log Antenna (30M - 5GHz)            | 3/14/2016 | Biennial     | 3/14/2018 | A051107              |

**Table 6-1. Annual Test Equipment Calibration Schedule**

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 9 of 19  |                                 |

## 7.0 TEST RESULTS

### 7.1 Summary



Company Name: Samsung Electronics Co., Ltd.  
 FCC ID: A3LSMG950N  
 FCC Classification: Digital Transmission System (DTS)  
 Number of Channels: 40

| FCC Part Section(s) | Test Description  | Test Limit   | Test Condition | Test Result | Reference         |
|---------------------|---|--|----------------|-------------|-------------------|
| 15.205<br>15.209    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209 | RADIATED       | PASS        | Sections 7.2, 7.3 |

**Table 7-1. Summary of Test Results**

**Note:**

All modes of operation were investigated. The test results shown in the following sections represent the worst case emissions.

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 10 of 19   |                                 |

## 7.2 Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d)

### Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at maximum power and at the appropriate frequencies. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

***All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table 7-2 per Section 15.209.***

| Frequency         | Field Strength<br>[ $\mu\text{V/m}$ ] | Measured Distance<br>[Meters] |
|-------------------|---------------------------------------|-------------------------------|
| 0.009 – 0.490 MHz | 2400/F (kHz)                          | 300                           |
| 0.490 – 1.705 MHz | 24000/F (kHz)                         | 30                            |
| 1.705 – 30.00 MHz | 30                                    | 30                            |
| 30.00 – 88.00 MHz | 100                                   | 3                             |
| 88.00 – 216.0 MHz | 150                                   | 3                             |
| 216.0 – 960.0 MHz | 200                                   | 3                             |
| Above 960.0 MHz   | 500                                   | 3                             |

**Table 7-2. Radiated Limits**



### Test Procedures Used

KDB 558074 D01 v03r05 – Section 12.1, 12.2.7

### Test Settings

#### **Average Field Strength Measurements per Section 12.2.5.3 of KDB 558074 D01 v03r05**

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3kHz > 1/T
4. Averaging type was set to RMS to ensure that video filtering was applied in the power domain
5. Detector = peak
6. Sweep time = auto
7. Trace mode = max hold
8. Trace was allowed to run for at least 50 times (1/duty cycle) traces

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 11 of 19   |                                 |

**Peak Field Strength Measurements per Section 12.2.4 of KDB 558074 D01 v03r05**


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW is set depending on measurement frequency, as specified in Table 7-3 below
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

| Frequency    | RBW          |
|--------------|--------------|
| 9 – 150kHz   | 200 – 300Hz  |
| 0.15 – 30MHz | 9 – 10kHz    |
| 30 – 1000MHz | 100 – 120kHz |
| > 1000MHz    | 1MHz         |

**Table 7-3. RBW as a Function of Frequency**

**Test Setup**

The EUT and measurement equipment were set up as shown in the diagram below.

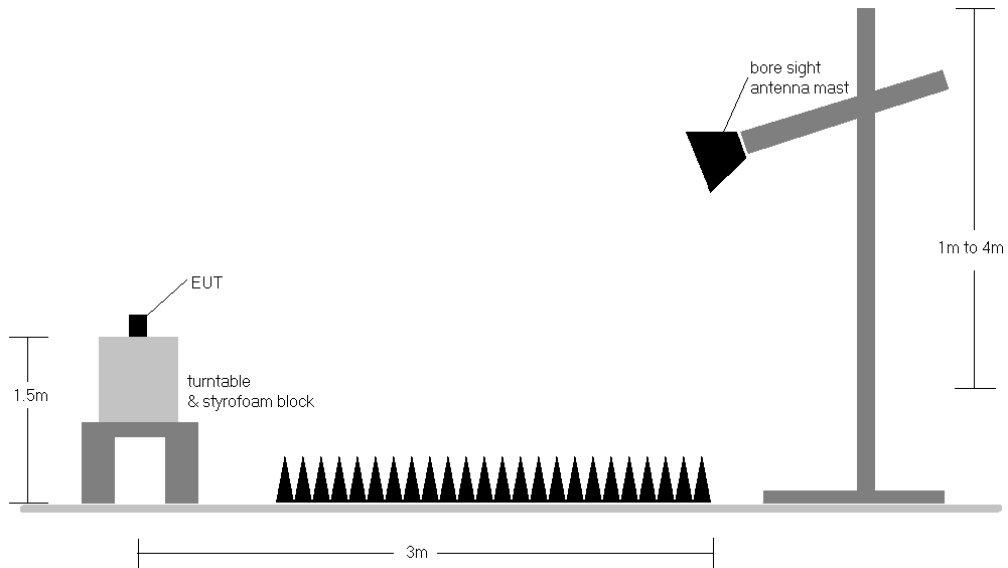

**Figure 7-1. Radiated Test Setup >1GHz**

|   |                                 |   |  |                                 |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   |  | Page 12 of 19                   |

## Test Notes

1. The optional test procedures for antenna port conducted measurements of unwanted emissions per the guidance of KDB 558074 D01 v03r05 were not used to evaluate this device for compliance to radiated limits. All radiated spurious emissions levels were measured in a radiated test setup.
2. All emissions lying in restricted bands specified in §15.205 are below the limit shown in Table 7-2.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20dB of the respective limits were not reported.
6. Average measurements were recorded using a VBW of 3kHz, per Section 12.2.5.3 of KDB 558074 D01 v03r05, since 1/T is equal to just under 3kHz. This method was used because the EUT could not be configured to operate with a duty cycle > 98%. Both average and peak measurements were made using a peak detector
7. Emissions below 18GHz were measured at a 3 meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
8. No significant radiated band edge emissions were found in the 2310 – 2390MHz restricted band.
9. The "-" shown in the following RSE tables are used to denote a noise floor measurement.

## Sample Calculations



### Determining Spurious Emissions Levels

- Field Strength Level  $_{[dB\mu V/m]} = \text{Analyzer Level}_{[dBm]} + 107 + \text{AFCL}_{[dB/m]}$
- $\text{AFCL}_{[dB/m]} = \text{Antenna Factor}_{[dB/m]} + \text{Cable Loss}_{[dB]}$
- $\text{Margin}_{[dB]} = \text{Field Strength Level}_{[dB\mu V/m]} - \text{Limit}_{[dB\mu V/m]}$

### Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.3 was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   |   | Page 13 of 19                   |

## Radiated Spurious Emission Measurements

§15.205 §15.209 §15.247(d)

Bluetooth Mode: LE  
 Data Rate: 2Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 39



| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | -                   | -                          | -70.03               | 1.04        | 38.01                   | 53.98          | -15.97      |
| 4960.00         | Peak     | H               | -                   | -                          | -57.86               | 1.04        | 50.18                   | 73.98          | -23.80      |
| 7440.00         | Avg      | H               | -                   | -                          | -70.15               | 10.08       | 46.93                   | 53.98          | -7.05       |
| 7440.00         | Peak     | H               | -                   | -                          | -58.04               | 10.08       | 59.04                   | 73.98          | -14.94      |
| 12400.00        | Avg      | H               | -                   | -                          | -73.00               | 16.78       | 50.78                   | 53.98          | -3.20       |
| 12400.00        | Peak     | H               | -                   | -                          | -58.08               | 16.78       | 65.70                   | 73.98          | -8.28       |

**Table 7-4. Radiated Measurements @ 3 meters**

Bluetooth Mode: LE  
 Data Rate: 2Mbps  
 Distance of Measurements: 3 Meters  
 Operating Frequency: 2480MHz  
 Channel: 39

| Frequency [MHz] | Detector | Ant. Pol. [H/V] | Antenna Height [cm] | Turntable Azimuth [degree] | Analyzer Level [dBm] | AFCL [dB/m] | Field Strength [dBµV/m] | Limit [dBµV/m] | Margin [dB] |
|-----------------|----------|-----------------|---------------------|----------------------------|----------------------|-------------|-------------------------|----------------|-------------|
| 4960.00         | Avg      | H               | -                   | -                          | -71.06               | 1.04        | 36.98                   | 53.98          | -17.00      |
| 4960.00         | Peak     | H               | -                   | -                          | -57.11               | 1.04        | 50.93                   | 73.98          | -23.05      |
| 7440.00         | Avg      | H               | -                   | -                          | -69.78               | 10.08       | 47.30                   | 53.98          | -6.68       |
| 7440.00         | Peak     | H               | -                   | -                          | -59.21               | 10.08       | 57.87                   | 73.98          | -16.11      |
| 12400.00        | Avg      | H               | -                   | -                          | -73.53               | 16.78       | 50.25                   | 53.98          | -3.73       |
| 12400.00        | Peak     | H               | -                   | -                          | -59.76               | 16.78       | 64.02                   | 73.98          | -9.96       |

**Table 7-5. Radiated Measurements with WCP @ 3 meters**

|   |   |   |   |                                 |
|---|---|---|---|---------------------------------|
| FCC ID: A3LSMG950N                      |  | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017   | EUT Type:<br>Portable Handset   | Page 14 of 19   |                                 |

### 7.3 Radiated Restricted Band Edge Measurements §15.205 §15.209

The radiated restricted band edge measurements are measured with an EMI test receiver connected to the receive antenna while the EUT is transmitting.

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Preamplifier Gain}$$


Bluetooth Mode: LE

Data Rate: 2Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

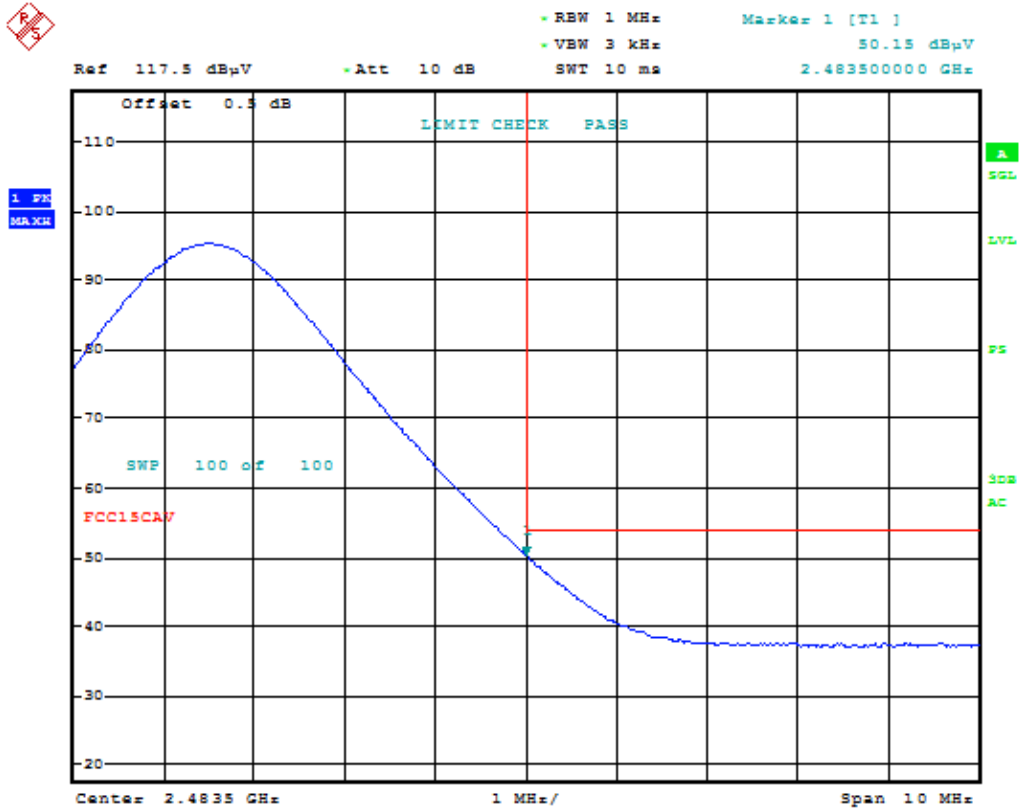

Date: 13.MAR.2017 12:15:21

**Plot 7-1. Radiated Restricted Upper Band Edge Measurement (Average)**


|   |                                 |   |  |                                 |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   |  | Page 15 of 19                   |

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

The amplitude offset shown in the following plots for average measurements was calculated using the formula:

$$\text{Offset (dB)} = (\text{Antenna Factor} + \text{Cable Loss} + \text{Attenuator}) - \text{Pre-amplifier Gain}$$

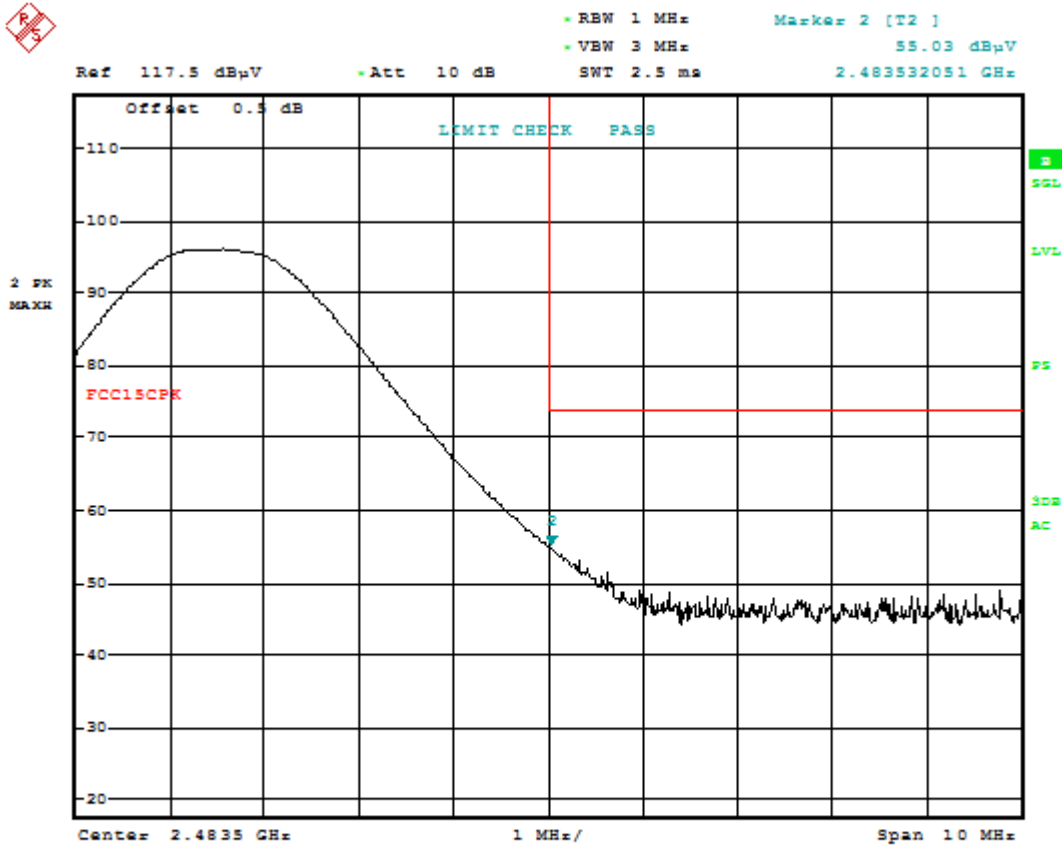

Date: 13.MAR.2017 12:15:37

**Plot 7-2. Radiated Restricted Upper Band Edge Measurement (Peak)**

|   |                                 |   |  |                                 |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   |  | Page 16 of 19                   |

# Radiated Restricted Band Edge Measurements

§15.205 §15.209


Bluetooth Mode: LE

Data Rate: 2Mbps

Measurement Distance: 3 Meters

Operating Frequency: 2480MHz

Channel: 39

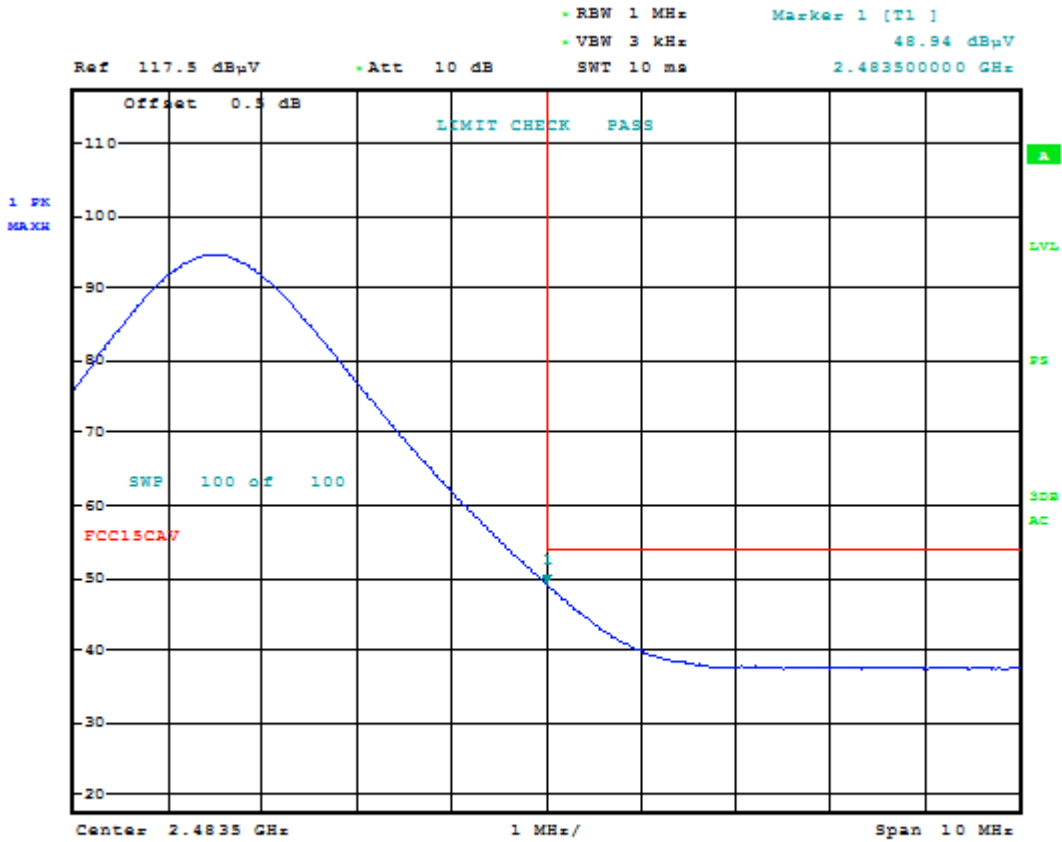


Date: 13.MAR.2017 12:41:42

**Plot 7-3. Radiated Restricted Upper Band Edge Measurement with WCP (Average)**

|   |                                 |   |  |                                 |
|---|---------------------------------|---|--|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |  | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   |  | Page 17 of 19                   |

# Radiated Restricted Band Edge Measurements

## §15.205 §15.209

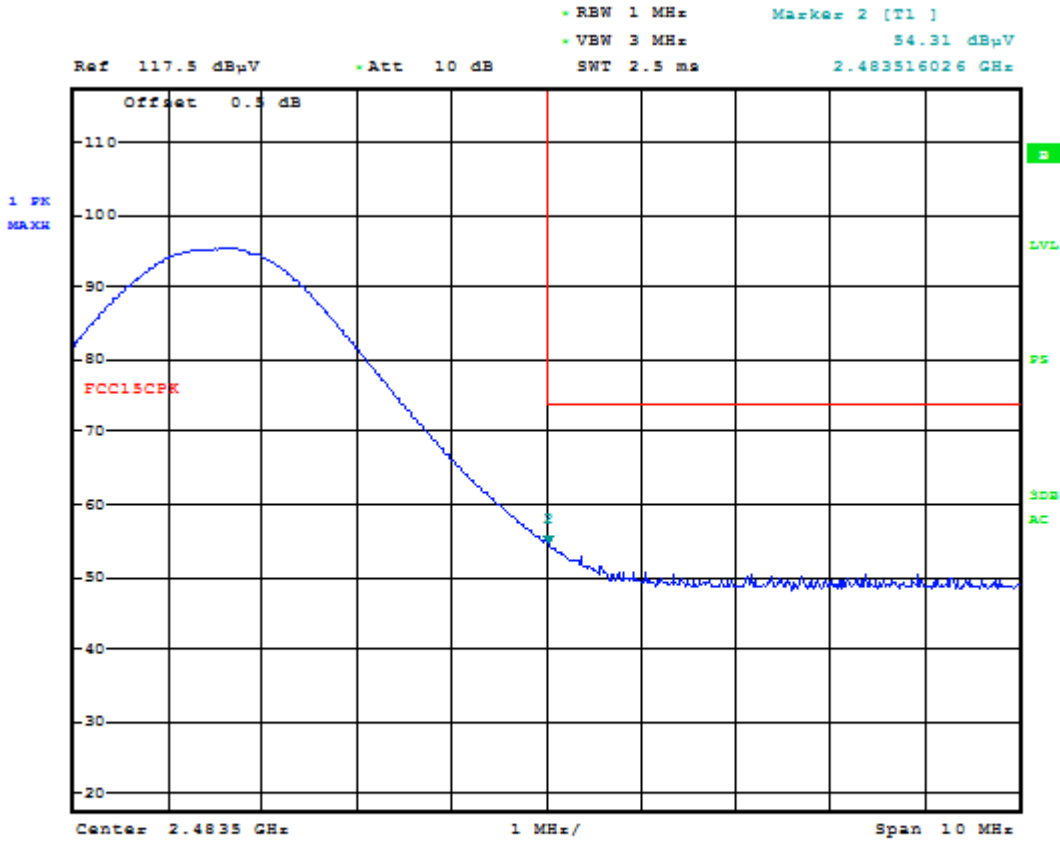



Date: 13.MAR.2017 12:44:58

Plot 7-4. Radiated Restricted Upper Band Edge Measurement with WCP (Peak)

|   |                                 |   |               |                                 |
|---|---------------------------------|---|---------------|---------------------------------|
| FCC ID: A3LSMG950N                      |                                 | FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br>(CLASS II PERMISSIVE CHANGE) |               | Approved by:<br>Quality Manager |
| Test Report S/N:<br>1M1703100103-07.A3L | Test Dates:<br>3/13 - 3/24/2017 | EUT Type:<br>Portable Handset   | Page 18 of 19 |                                 |

## 8.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG950N** is in compliance with Part 15C of the FCC Rules.

|  |   |   |   |  |
|--|---|---|---|--|
| <b>FCC ID:</b> A3LSMG950N                      |  | <b>FCC Pt. 15.247 BLUETOOTH (LE) TEST REPORT<br/>(CLASS II PERMISSIVE CHANGE)</b> |  | <b>Approved by:</b><br>Quality Manager |
| <b>Test Report S/N:</b><br>1M1703100103-07.A3L | <b>Test Dates:</b><br>3/13 - 3/24/2017  | <b>EUT Type:</b><br>Portable Handset  | Page 19 of 19   |  |