



# CERTIFICATION TEST REPORT

**Report Number. :** 12563734-E11V3

**Applicant :** Samsung Electronics Co., Ltd.  
129 Samsung-Ro, Yeongtong-Gu,  
Suwon-Si, Gyeonggi-Do, 16677, Korea

**Model :** SM-G970F/DS and SM-G970F

**FCC ID :** A3LSMG970F

**EUT Description :** GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE  
20/40/80, ANT+ and NFC

**Test Standard(s) :** FCC CFR47 PART 27 SUBPART M

**Date Of Issue:**  
JANUARY 23, 2019

**Prepared by:**  
UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538 U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



NVLAP Lab code: 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	1/10/2019	Initial Review	--
V2	1/18/2019	Updated Section 5.2, 5.4, 5.5, 8, and 9	Steven Tran
V3	1/23/2019	Updated Section 1 and 9	Steven Tran



## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS</b> .....	<b>5</b>
<b>2. TEST METHODOLOGY</b> .....	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION</b> .....	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY</b> .....	<b>7</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	7
4.2. SAMPLE CALCULATION .....	7
4.3. MEASUREMENT UNCERTAINTY .....	7
<b>5. EQUIPMENT UNDER TEST</b> .....	<b>8</b>
5.1. DESCRIPTION OF EUT .....	8
5.2. MAXIMUM OUTPUT POWER .....	8
5.3. SOFTWARE AND FIRMWARE .....	10
5.4. MAXIMUM ANTENNA GAIN .....	10
5.5. WORST-CASE CONFIGURATION AND MODE .....	11
5.6. DESCRIPTION OF TEST SETUP .....	12
<b>6. TEST AND MEASUREMENT EQUIPMENT</b> .....	<b>14</b>
<b>7. RF OUTPUT POWER VERIFICATION</b> .....	<b>15</b>
7.1. LTE .....	15
7.1.1. LTE BAND 7 .....	17
7.1.2. LTE BAND 38 .....	19
<b>8. CONDUCTED TEST RESULTS</b> .....	<b>20</b>
8.1. OCCUPIED BANDWIDTH .....	20
8.1.1. LTE BAND 7 .....	22
8.1.2. LTE BAND 38 .....	25
8.2. BAND EDGE AND EMISSION MASK .....	26
8.2.1. LTE BAND 7 ADJACENT CHANNEL POWER .....	27
8.2.2. LTE BAND 38 ADJACENT CHANNEL POWER .....	41
8.3. OUT OF BAND EMISSIONS .....	45
8.3.1. LTE BAND 7 .....	46
8.3.2. LTE BAND 38 .....	47
<b>9. RADIATED TEST RESULTS</b> .....	<b>48</b>
9.1. FIELD STRENGTH OF SPURIOUS RADIATION .....	48

---

9.1.1. LTE BAND 7.....	49
9.1.2. LTE BAND 38.....	51
<b>10. SETUP PHOTOS.....</b>	<b>53</b>

# 1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SAMSUNG ELECTRONICS CO., LTD. 129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI, GYEONGGI-DO, 16677, KOREA	
Model	SM-G970F/DS AND SM-G970F	
FCC ID	A3LSMG970F	
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC/11AX HE 20/40/80, ANT+ AND NFC	
Serial Number	R38KA0H4BJF (CONDUCTED)R38B05BDYN (RADIATED)	
Date Tested	OCTOBER 24, 2018 to JANUARY 22, 2019	
Applicable Standards	FCC CFR 47 PART 27M	
Test Results	Complies	
<p>UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.</p> <p>The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise.</p> <p>This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of the U.S. government.</p>		
Approved & Released For UL Verification Services Inc. By:	Reviewed By:	
		
Dan Corona Operations Leader Consumer Technology Division UL Verification Services Inc.	Steven Tran Project Engineer Consumer Technology Division UL Verification Services Inc.	

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part 90, FCC KDB 971168 D01 v3r1.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, and 47658 Kato Road, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street	47658 Kato Rd
<input checked="" type="checkbox"/> Chamber A (ISED:2324B-1)	<input type="checkbox"/> Chamber D (ISED:22541-1)	<input type="checkbox"/> Chamber I (ISED:2324A-5)
<input checked="" type="checkbox"/> Chamber B (ISED:2324B-2)	<input type="checkbox"/> Chamber E (ISED:22541-2)	<input type="checkbox"/> Chamber J (ISED:2324A-6)
<input type="checkbox"/> Chamber C (ISED:2324B-3)	<input type="checkbox"/> Chamber F (ISED:22541-3)	<input type="checkbox"/> Chamber K (ISED:2324A-1)
	<input type="checkbox"/> Chamber G (ISED:22541-4)	<input type="checkbox"/> Chamber L (ISED:2324A-3)
	<input type="checkbox"/> Chamber H (ISED:22541-5)	

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. Chambers above are covered under Industry Canada company address and respective code

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

#### RADIATED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$
$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

#### MAINS CONDUCTED EMISSIONS

Where relevant, the following sample calculation is provided:

$$\text{Final Voltage (dBuV)} = \text{Measured Voltage (dBuV)} + \text{Cable Loss (dB)} + \text{Limiter Factor (dB)} + \text{LISN Insertion Loss.}$$
$$36.5 \text{ dBuV} + 0 \text{ dB} + 10.1 \text{ dB} + 0 \text{ dB} = 46.6 \text{ dBuV}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE phone with BT, DTS/UNII a/b/g/n/ac/11ax HE 20/40/80, ANT+ and NFC. The model SM-G970F was used for final testing and is representative of the test results in this report.

### 5.2. MAXIMUM OUTPUT POWER

#### ERP/EIRP LIMIT

FCC: §2.1046 and §27.50

#### EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17  
KDB 971168 D01 Section 5.6  
KDB 412172 D01

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:



**LTE BAND BAND 7**

RSS 199								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		2.64						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
15+10	QPSK	2507.5	2564.7	23.0	25.64	0.366	22575	22M6G7W
	16QAM			22.6	25.24	0.334	22577	22M6D7W
	64QAM			20.4	23.04	0.201		
10+20	QPSK	2505.5	2560.0	23.3	25.94	0.393	26614	26M6G7W
	16QAM			22.9	25.54	0.358	26457	26M5D7W
	64QAM			20.3	22.94	0.197		
20+10	QPSK	2510.0	2564.5	23.1	25.74	0.375	26970	26M0G7W
	16QAM			22.5	25.14	0.327	27007	27M0D7W
	64QAM			20.4	23.04	0.201		
15+15	QPSK	2507.5	2562.5	23.2	25.84	0.384	27294	27M3D7W
	16QAM			22.7	25.34	0.342	27317	27M3D7W
	64QAM			20.3	22.94	0.197		
15+20	QPSK	2507.8	2560.0	23.3	25.89	0.388	30992	30M0G7W
	16QAM			22.9	25.54	0.358	30968	30M0D7W
	64QAM			20.3	22.94	0.197		
20+15	QPSK	2510.0	2562.2	23.2	25.84	0.384	31468	31M5G7W
	16QAM			22.8	25.44	0.350	31491	31M5D7W
	64QAM			20.3	22.94	0.197		
20+20	QPSK	2510.0	2560.0	23.4	26.04	0.402	35616	35M6G7W
	16QAM			22.6	25.24	0.334	35542	35M5D7W
	64QAM			20.4	23.04	0.201		

**LTE BAND BAND 38**

RSS 199								
EIRP Limit (W)		2.00						
Antenna Gain (dBi)		-4.10						
Bandwidth (MHz)	Modulation	Low Frequency (MHz)	Upper Frequency (MHz)	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Average (W)	99% BW (kHz)	Emission Designator
15+15	QPSK	2577.5	2612.5	22.9	18.80	0.076	27203	27M2G7W
	16QAM			22.2	18.10	0.065	26981	26M0D7W
	64QAM			20.0	15.90	0.039		
20+20	QPSK	2580.0	2610.0	22.9	18.80	0.076	35403	35M4G7W
	16QAM			22.4	18.30	0.068	35369	35M4D7W
	64QAM			20.0	15.90	0.039		

### 5.3. SOFTWARE AND FIRMWARE

The EUT firmware and software version installed during testing was G970F.001

### 5.4. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
LTE BAND 7, 2500 - 2570 MHz	2.64
LTE BAND 38 , 2570 - 2620 MHz	-4.10

### 5.5. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Uplink Carrier Aggregation Bands of:  
Band 7C and, Band 38C

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM, and 64QAM modulations. All testing was performed using QPSK, and 16QAM modulations to represent the worst case. Out of band emissions and spurious radiation were only performed on bandwidth and RB offset(with RB size 1) with the highest power for both QPSK and 16QAM.

Highest Power for Each Band				
LTE Band	Component Carrier	Bandwidth (MHz)	RB Size	RB Offset
7 (Uplink CA)	PCC	20	1	99
	SCC	20	1	0
38 (Uplink CA)	PCC	20	1	99
	SCC	20	1	0

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that X-Axis for 2500MHz with AC/DC Adapter and headset was worst-case orientation.

All radios that can be transmitted simultaneously have been evaluated for radiated for all possible combinations of transmission and found to be in compliance.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	Samsung	EP-TA300	R3KB5B01S1SE3	N/A
USB Data Caba	Samsung	N/A	N/A	N/A
Earphone	Samsung	N/A	N/A	N/A

### I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


### I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identic	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Earphone	1	USB	Un-shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	No


### TEST SETUP

The EUT is continuously communicated to the call box during the tests

**CONDUCTED TEST SETUP DIAGRAM**

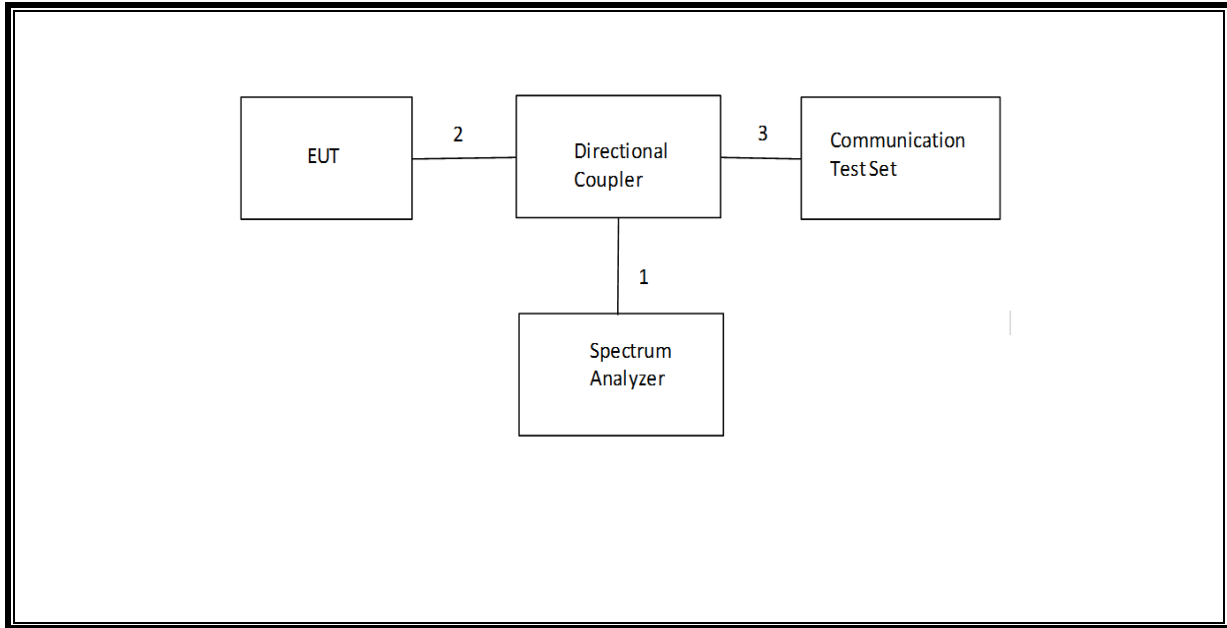

**RADIATED TEST SETUP DIAGRAM**

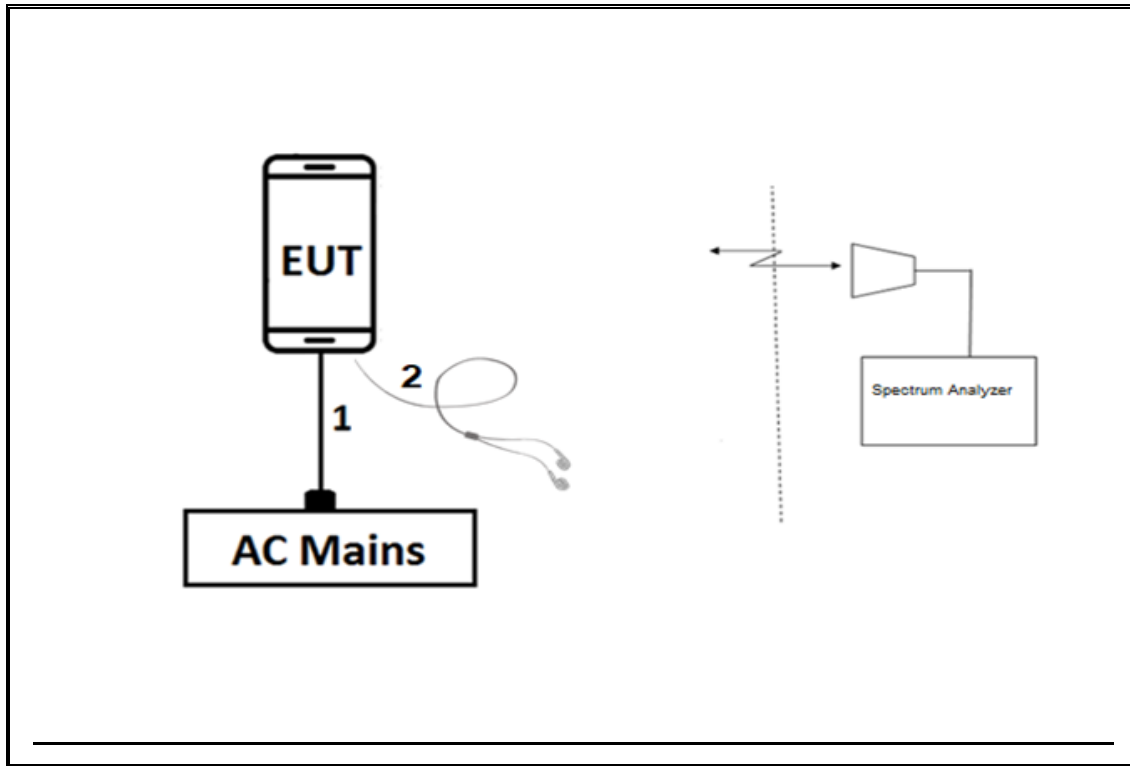

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	ID Num	Cal Due	Last Cal
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/19	07/05/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19	02/21/18
Highpass Filter, 1.5 GHz	Micro-Tronics	HPM50114	T1852	07/16/19	07/16/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/19	07/19/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T345	04/25/19	04/25/18
Antenna, Horn 1-18GHz	ETS-Lindgren	3117	T863	06/21/19	06/21/18
18 - 26.5 GHz Horn Antenna	ARA	MWH-1826/B	T477	06/16/2019	06/16/2018
RF Amplifier	MITEQ	AFS42-00101800-25-S-42	T493	04/03/19	04/03/18
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/19	06/18/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T972	05/29/19	05/29/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T1872	02/15/19	02/15/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T949	02/21/19	02/21/18
Chamber, Environmental	Thermotron	SE-600-10-10	T80	02/22/19	02/22/18
Spectrum Analyzer	Agilent (Keysight) Technologies	E4446A	T146	07/18/19	07/18/18
Spectrum Analyzer	Agilent	CCS01178-1C	T200	09/11/19	09/11/18
Spectrum Analyzer, PSA, 3Hz to 26.5GHz	Agilent	E4440A	T120	09/11/19	09/11/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1450	02/05/19	02/05/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1466	04/16/19	04/16/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Agilent (Keysight) Technologies	N9030A	T1454	01/08/19	01/08/18
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR	CNR
DC power supply 15V	Spresen	XT15-4	T463	CNR	CNR

UL AUTOMATION SOFTWARE			
CLT Software	UL	UL RF	Ver 7.6, November 11, 2017
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017

### NOTES:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

## 7. RF OUTPUT POWER VERIFICATION

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows.

### 7.1. LTE

#### CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3**

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".3

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

**MODES TESTED**

- LTE Band 7
- LTE Band 38

**RESULTS**

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:



**7.1.1. LTE BAND 7**

<b>ID:</b>	44351	<b>Date:</b>	1/2/19
------------	-------	--------------	--------

**OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 10.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average			
							Power			
							Size	Offset	Power	
15MHz / 10MHz	2507.5	2519.5	1	74	1	0	QPSK	16QAM	64QAM	
							23.0	22.4	20.4	
							14.6	15.0	15.1	
	2530.1	2542.1	1	74	1	0	49	21.1	20.2	19.9
								22.9	22.4	20.4
								14.9	15.3	15.0
								21.5	20.5	19.9
								23.0	22.6	20.4
								14.6	15.0	14.9
2552.7	2564.7	1	74	1	0	49	21.2	20.2	19.8	
							21.2	20.2	19.8	
							21.2	20.2	19.8	

**OUTPUT POWER FOR LTE BAND 7 (10.0MHz + 20.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average			
							Power			
							Size	Offset	Power	
10MHz / 20MHz	2505.5	2519.9	1	49	1	0	QPSK	16QAM	64QAM	
							23.3	22.7	20.3	
	2525.6	2540.0	1	49	1	0	0	21.1	20.1	19.8
								23.2	22.9	20.2
								21.1	20.1	19.8
								23.3	22.9	20.2
2545.6	2560.0	1	49	1	0	0	21.3	20.3	19.7	
							21.3	20.3	19.7	

**OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 10.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average			
							Power			
							Size	Offset	Power	
20MHz / 10MHz	2510.0	2524.4	1	99	1	0	QPSK	16QAM	64QAM	
							23.0	22.3	20.4	
							14.6	15.0	15.1	
	2530.1	2544.5	1	99	1	0	49	21.2	20.2	19.8
								23.1	22.4	20.3
								14.9	15.3	15.1
								21.4	20.2	19.9
								23.0	22.5	20.3
								14.6	15.0	14.9
2550.1	2564.5	1	99	1	0	49	21.1	20.2	19.8	
							21.1	20.2	19.8	
							21.1	20.2	19.8	

**OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 15.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Size
15MHz / 15MHz	2507.5	2522.5	1	74	1	0	23.1	22.6	20.3
			75	0	75	0	21.1	20.1	20.0
	2527.5	2542.5	1	74	1	0	23.1	22.6	20.3
			75	0	75	0	21.1	20.1	19.9
	2547.5	2562.5	1	74	1	0	23.2	22.7	20.3
			75	0	75	0	21.3	20.3	19.9

**OUTPUT POWER FOR LTE BAND 7 (15.0MHz + 20.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Size
15MHz / 20MHz	2507.8	2524.9	1	74	1	0	23.2	22.7	20.3
			75	0	100	0	21.1	20.1	19.9
	2525.3	2542.4	1	74	1	0	23.1	22.9	20.3
			75	0	100	0	21.1	20.1	19.9
	2542.9	2560.0	1	74	1	0	23.2	22.7	20.3
			75	0	100	0	21.3	20.3	19.9

**OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 15.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Size
20MHz / 15MHz	2510.0	2527.1	1	99	1	0	23.1	22.8	20.3
			100	0	75	0	21.2	20.3	19.8
	2527.6	2544.7	1	99	1	0	23.0	22.6	20.3
			100	0	75	0	21.1	20.3	19.8
	2545.1	2562.2	1	99	1	0	23.2	22.8	20.3
			100	0	75	0	21.2	20.3	19.7

**OUTPUT POWER FOR LTE BAND 7 (20.0MHz + 20.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Size
20MHz/ 20MHz	2510.0	2529.8	1	99	1	0	23.0	22.4	20.4
			1	0	1	99	14.6	15.0	14.8
			100	0	100	0	21.2	20.2	19.8
	2525.1	2544.9	1	99	1	0	23.4	22.6	20.3
			1	0	1	99	14.9	15.3	14.9
			100	0	100	0	21.1	20.1	19.8
	2540.2	2560.0	1	99	1	0	23.0	22.6	20.3
			1	0	1	99	14.6	15.1	14.9
			100	0	100	0	21.1	20.2	19.7

**7.1.2. LTE BAND 38**

<b>ID:</b>	44351	<b>Date:</b>	12/27/18
------------	-------	--------------	----------

**OUTPUT POWER FOR LTE BAND 38 (15.0MHz + 15.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Power
15MHz / 15MHz	2577.5	2592.5	1	74	1	0	QPSK	16QAM	64QAM
			1	0	1	74	22.9	22.2	19.9
			75	0	75	0	14.7	15.3	14.4
	2587.5	2602.5	1	74	1	0	20.8	19.9	19.4
			1	0	1	74	<b>22.9</b>	<b>22.2</b>	19.6
			75	0	75	0	14.8	15.3	14.2
	2597.5	2612.5	1	74	1	0	20.9	19.9	19.4
			1	0	1	74	<b>22.9</b>	<b>22.2</b>	<b>20.0</b>
			75	0	75	0	14.8	15.4	14.6
			1	74	1	0	21.0	20.0	19.4

**OUTPUT POWER FOR LTE BAND 38 (20.0MHz + 20.0MHz)**

Bandwidth	PCC Frequency (MHz)	SCC1 Frequency (MHz)	PCC RB	PCC RB	SCC1 RB	SCC1 RB	Conducted Average		
							Power		
							Size	Offset	Power
20MHz/ 20MHz	2580.0	2599.8	1	99	1	0	QPSK	16QAM	64QAM
			1	0	1	99	22.8	22.3	20.0
			100	0	100	0	14.8	15.4	14.6
	2585.1	2604.9	1	99	1	0	20.9	19.9	19.3
			1	0	1	99	<b>22.9</b>	<b>22.4</b>	19.8
			100	0	100	0	14.8	15.4	14.7
	2590.2	2610.0	1	99	1	0	20.9	19.8	19.3
			1	0	1	99	22.8	22.3	<b>20.0</b>
			100	0	100	0	14.8	15.3	14.6
			1	99	1	0	20.9	19.8	19.3

## 8. CONDUCTED TEST RESULTS

### 8.1. OCCUPIED BANDWIDTH

#### RULE PART(S)

FCC: §2.1049

#### LIMITS

For reporting purposes only.

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

#### MODES TESTED

- LTE Band 7
- LTE Band 38

#### RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.


**LTE7**

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 7	10 MHz +20 MHz, QPSK	50/0 +100/0	2535.0	26.614	29.92
	10 MHz +20 MHz, 16QAM			26.457	31.34
	15 MHz + 10 MHz, QPSK	75/0 + 50/0		22.575	25.83
	15 MHz + 10 MHz, 16QAM			22.577	25.59
	15 MHz + 15 MHz, QPSK	75/0 +75/0		27.294	30.82
	15 MHz + 15 MHz, 16QAM			27.317	30.84
	15MHz + 20 MHz, QPSK	75/0 + 100/0		30.992	35.01
	15MHz + 20 MHz, 16QAM			30.968	35.06
	20MHz + 10 MHz, QPSK	100/0 + 50/0		26.970	30.15
	20MHz + 10 MHz, 16QAM			27.007	30.19
	20MHz + 15 MHz, QPSK	100/0 +75/0		31.468	35.10
	20MHz + 15 MHz, 16QAM			31.491	35.03
	20MHz + 20 MHz, QPSK	100/0 +100/0		35.616	39.95
	20MHz + 20 MHz, 16QAM			35.542	41.32


**LTE38**

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 38	15 +15 MHz, QPSK	75/0 + 75/0	2595	27.203	30.82
	15 +15 MHz, 16QAM			26.981	30.62
	20 +20 MHz, QPSK	100/0 + 100/0		35.403	39.95
	20 +20 MHz, 16QAM			35.369	39.81


8.1.1. LTE BAND 7

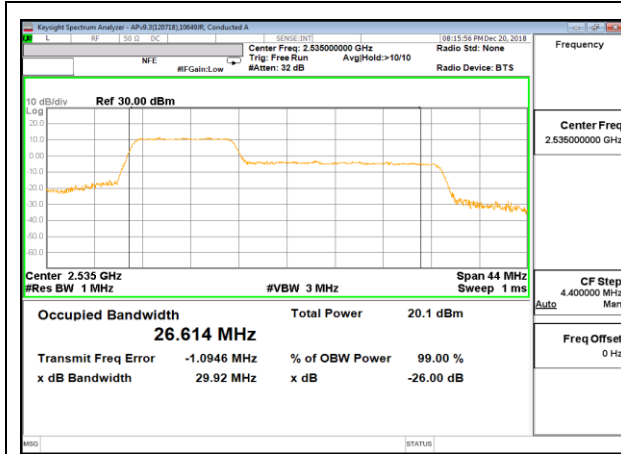


LTE B7 10MHz +20MHz QPSK Mid Channel  
 RB 50/0 + RB 100/0

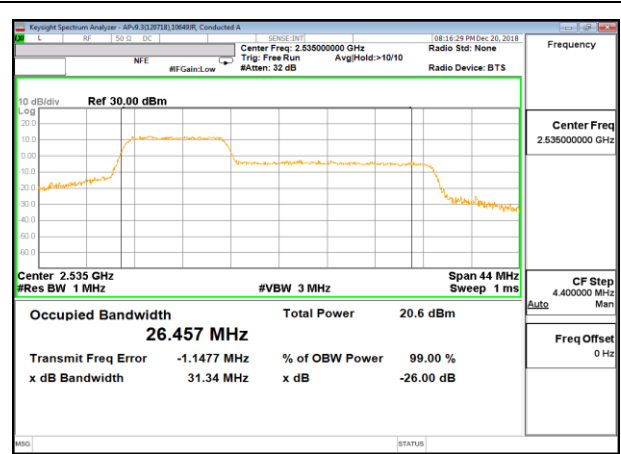


LTE B7 10MHz +20MHz 16QAM Mid Channel  
 RB 50/0 + RB 100/0

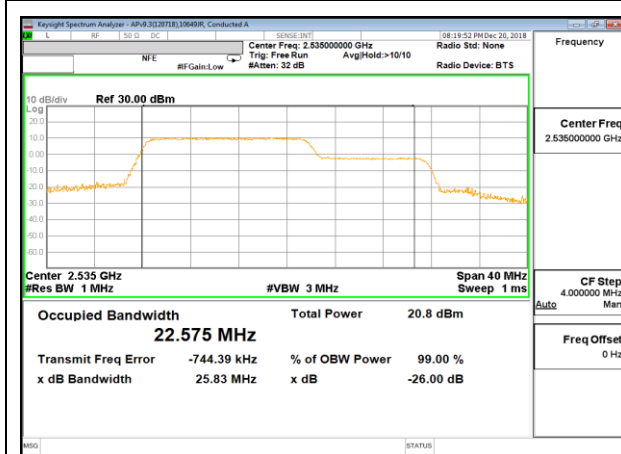


LTE B7 15MHz +10MHz QPSK Mid Channel  
 RB 75/0 + RB 50/0

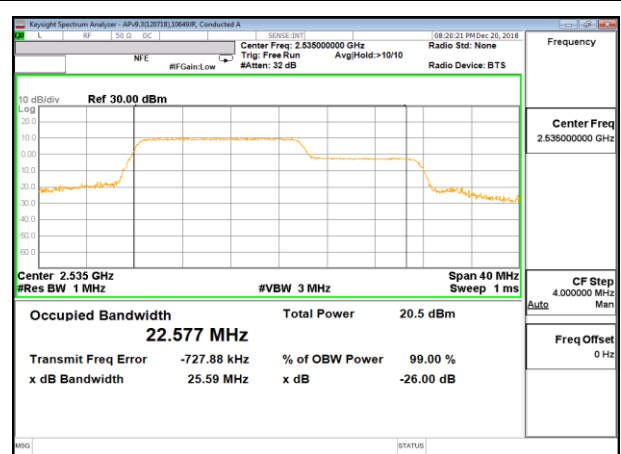


LTE B7 15MHz +10MHz 16QAM Mid Channel  
 RB 75/0 + RB 50/0

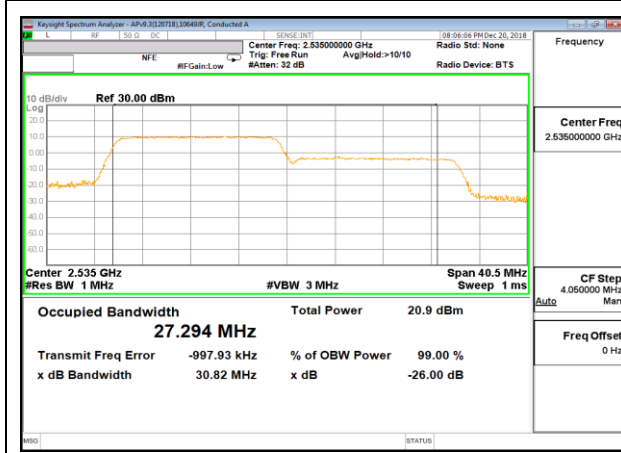


LTE B7 15MHz +15MHz QPSK Mid Channel  
 RB 75/0 + RB 75/0

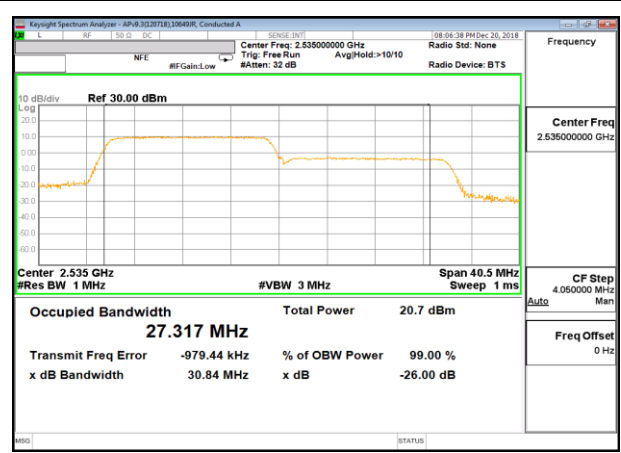


LTE B7 15MHz +15MHz 16QAM Mid Channel  
 RB 75/0 + RB 75/0

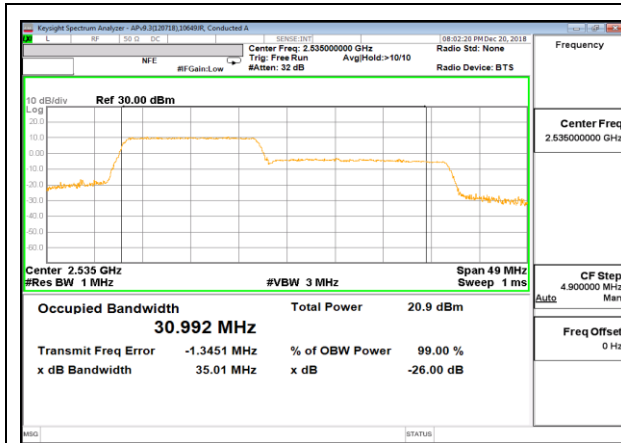


LTE B7 15MHz +20MHz QPSK Mid Channel  
 RB 75/0 + RB 100/0

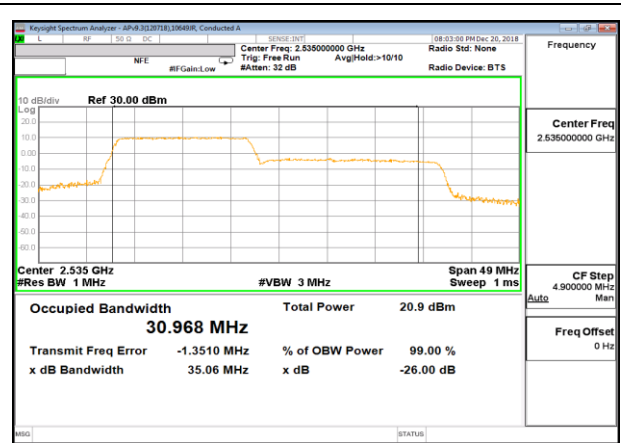


LTE B7 15MHz +20MHz 16QAM Mid Channel  
 RB 75/0 + RB 100/0

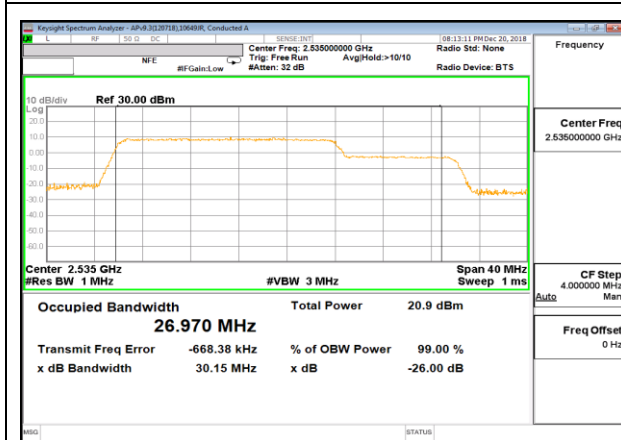


LTE B7 20MHz +10MHz QPSK Mid Channel  
 RB 100/0 + RB 50/0

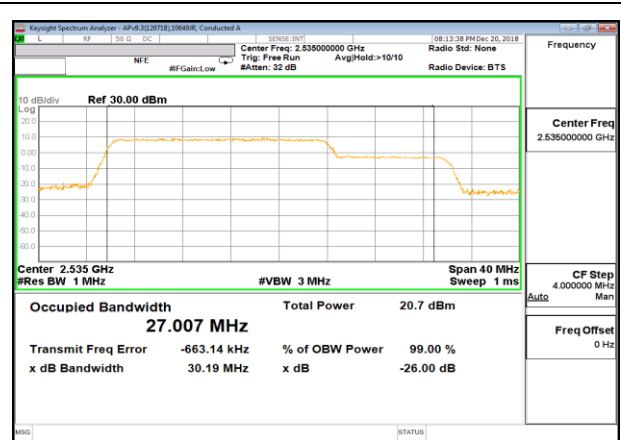


LTE B7 20MHz +10MHz 16QAM Mid Channel  
 RB 100/0 + RB 50/0

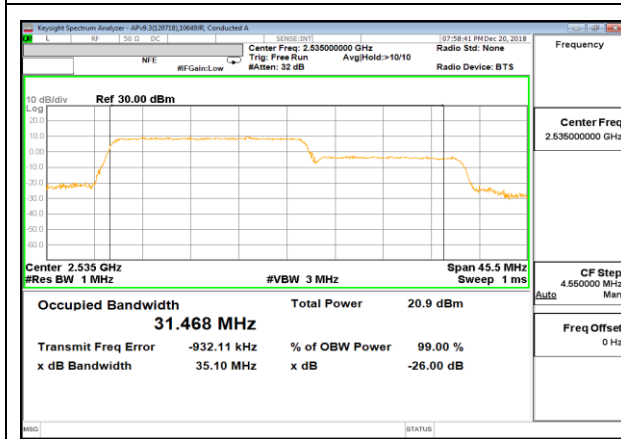


LTE B7 20MHz +15MHz QPSK Mid Channel  
 RB 100/0 + RB 75/0

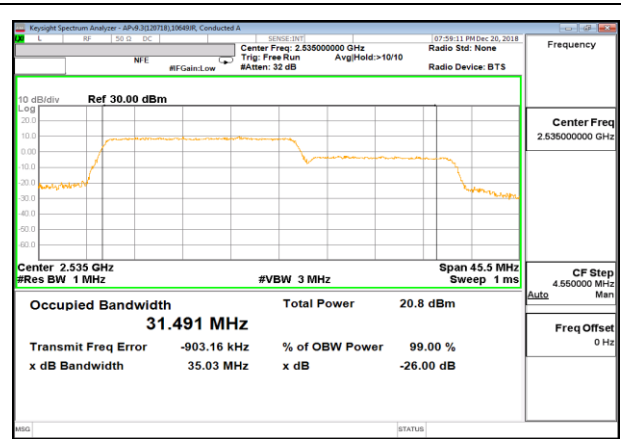

LTE B7 20MHz +15MHz 16QAM Mid Channel  
 RB 100/0 + RB 75/0

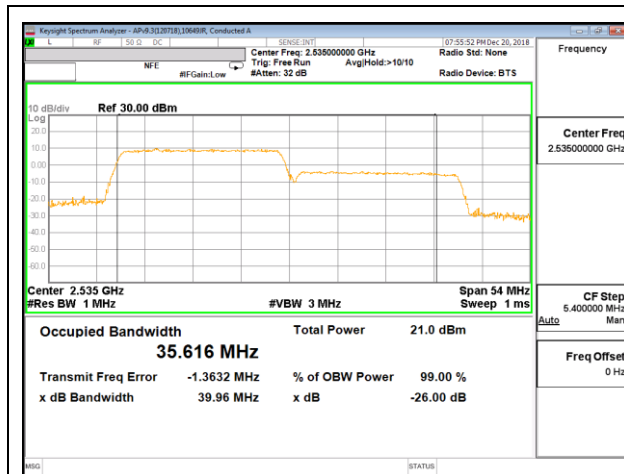


LTE B7 20MHz +20MHz QPSK Mid Channel  
 RB 100/0 + RB 100/0

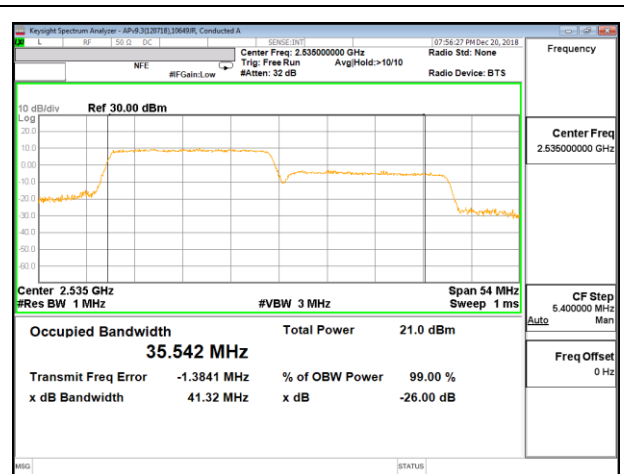


LTE B7 20MHz +20MHz 16QAM Mid Channel  
 RB 100/0 + RB 100/0




8.1.2. LTE BAND 38

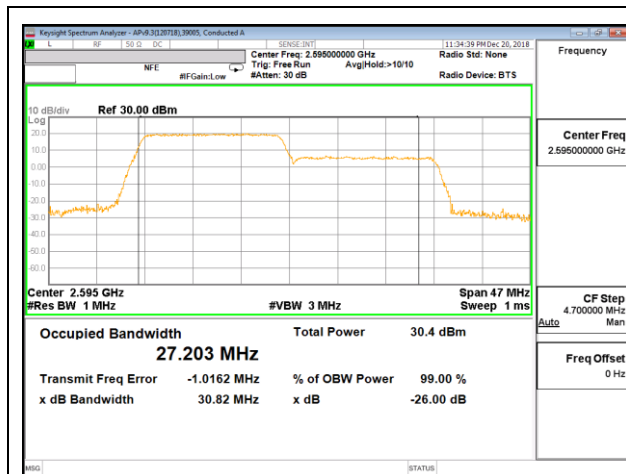


LTE B38 15MHz +15MHz QPSK Mid Channel  
 RB 75/0 + RB 75/0

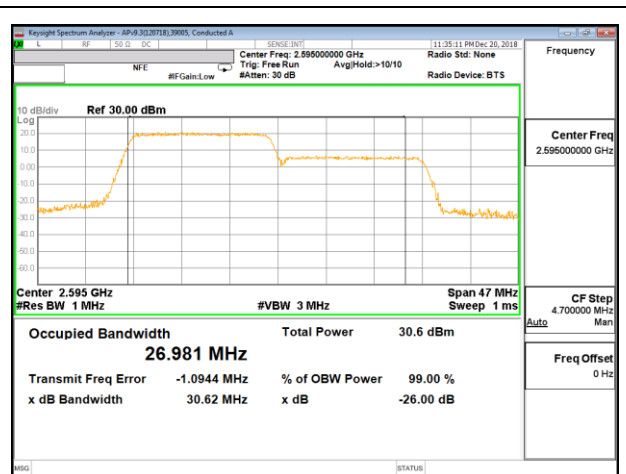

LTE B38 15MHz +15MHz 16QAM Mid  
 Channel RB 75/0 + RB 75/0

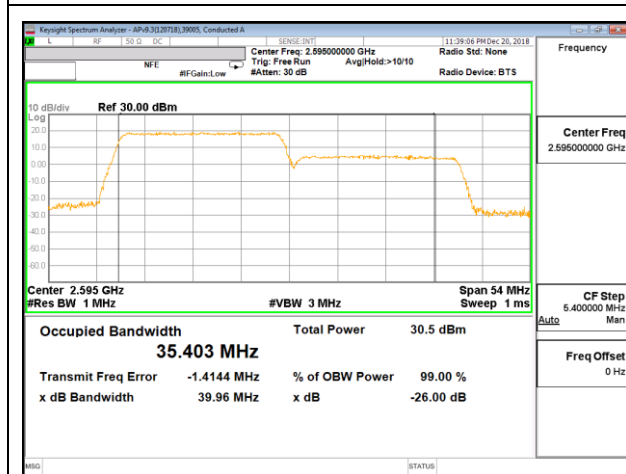

LTE B38 20MHz +20MHz QPSK Mid Channel  
 RB 100/0 + RB 100/0

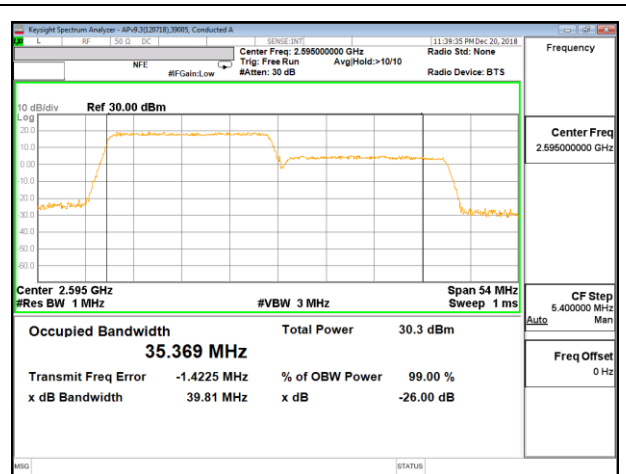

LTE B38 20MHz +20MHz 16QAM Mid  
 Channel RB 100/0 + RB 1000

## 8.2. BAND EDGE AND EMISSION MASK

### RULE PART(S)

FCC: §2.1051 and §27.53

### LIMITS

FCC: §27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.


### MODES TESTED

- LTE Band 7
- LTE Band 38


### RESULTS

### 8.2.1. LTE BAND 7 ADJACENT CHANNEL POWER


#### 20MHz + 10MHz

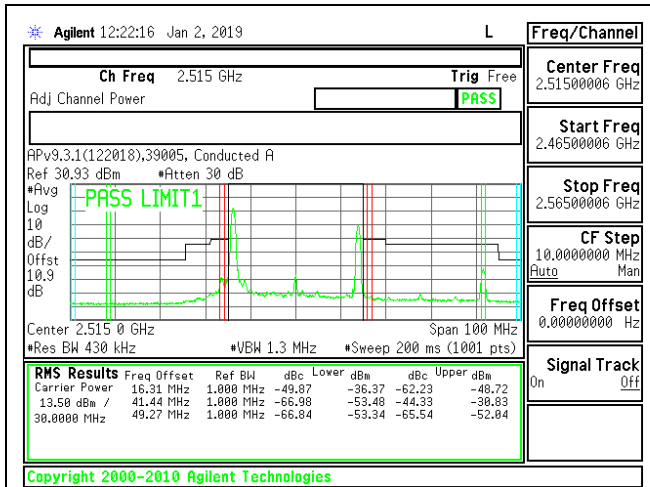


LTE B7 20MHz + 10MHz QPSK Low Ch RB1-0 + RB1-49

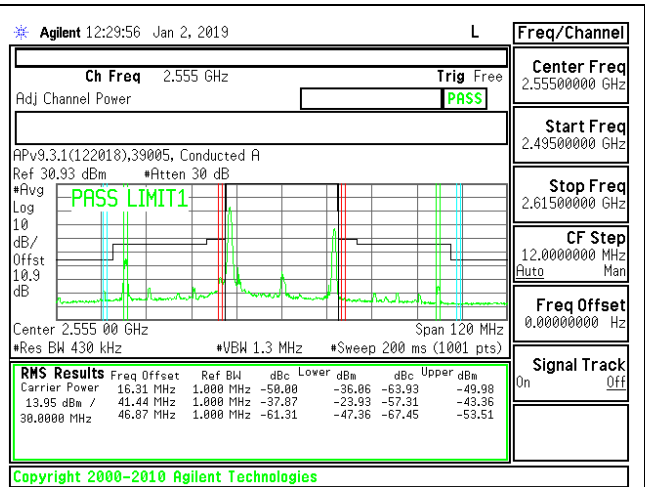


LTE B7 20MHz + 10MHz QPSK High Ch RB1-0 + RB1-49

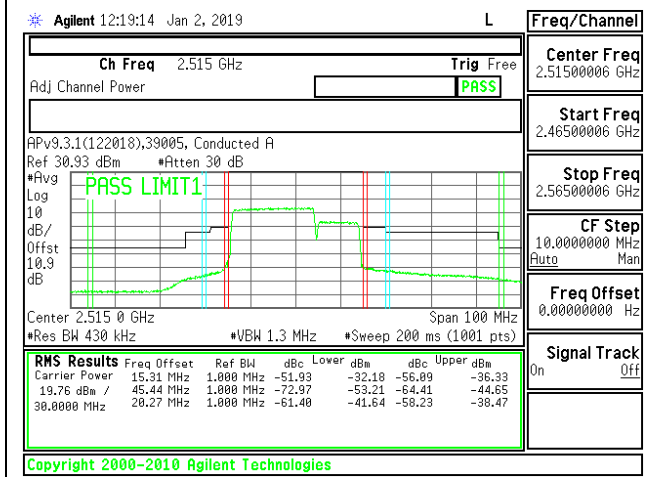


LTE B7 20MHz + 10MHz QPSK Low Ch RB100-0 + RB50-0

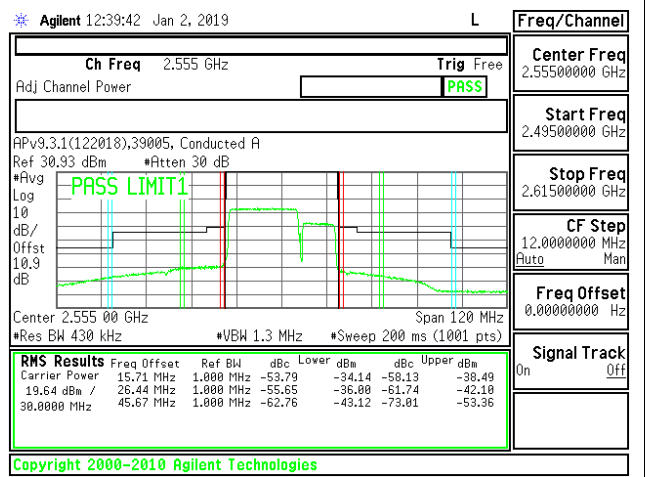


LTE B7 20MHz + 10MHz QPSK High Ch RB100-0 + RB50-0

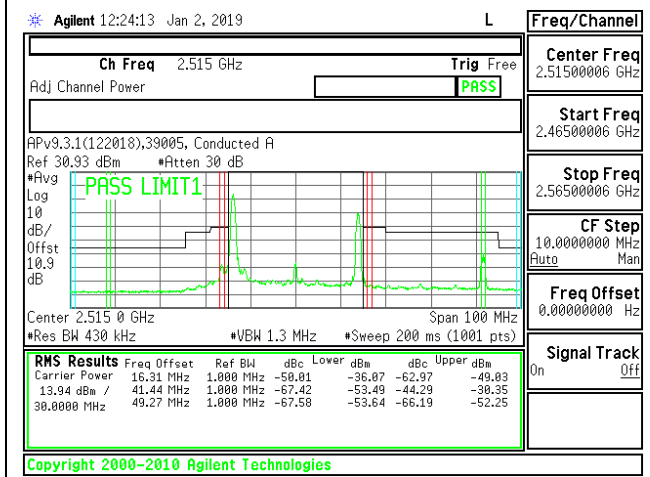


LTE B7 20MHz + 10MHz 16QAM Low Ch RB1-0 + RB1-49

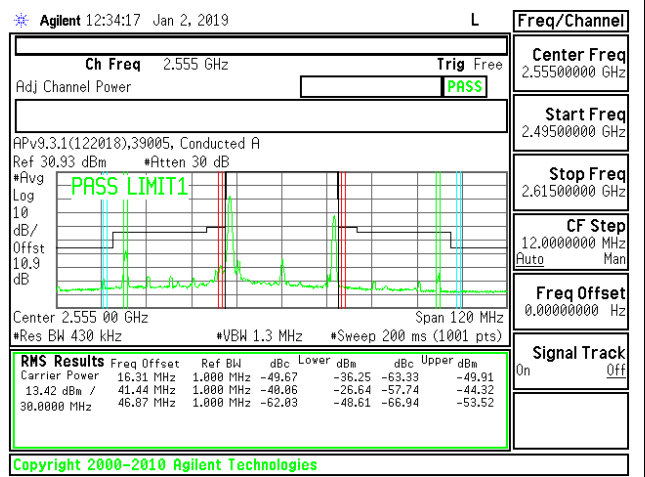


LTE B7 20MHz + 10MHz 16QAM High Ch RB1-0 + RB1-49

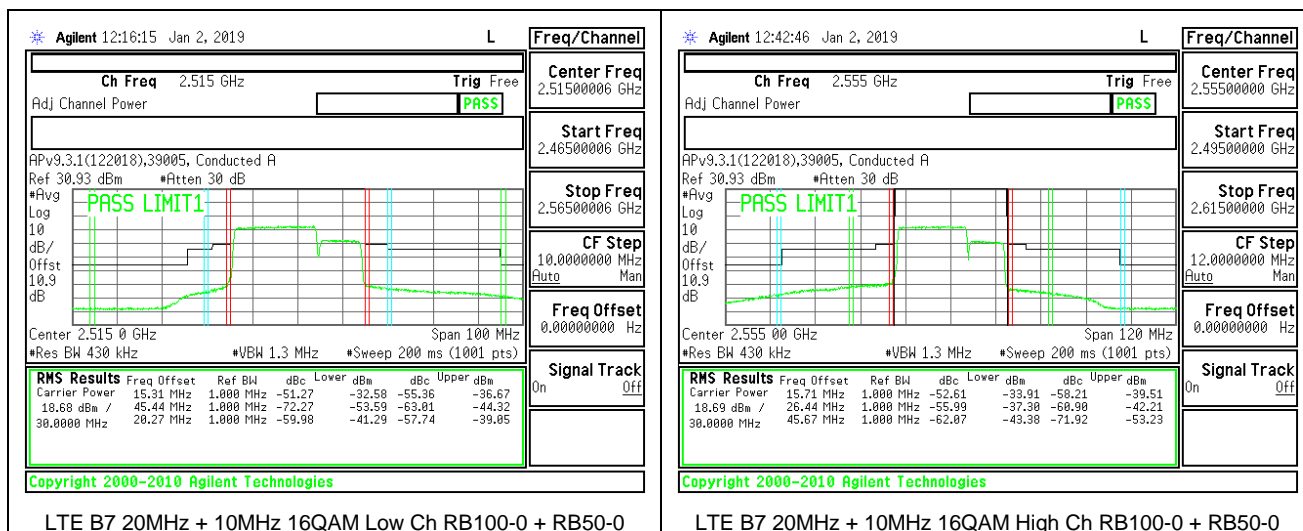


**20MHz + 20MHz**

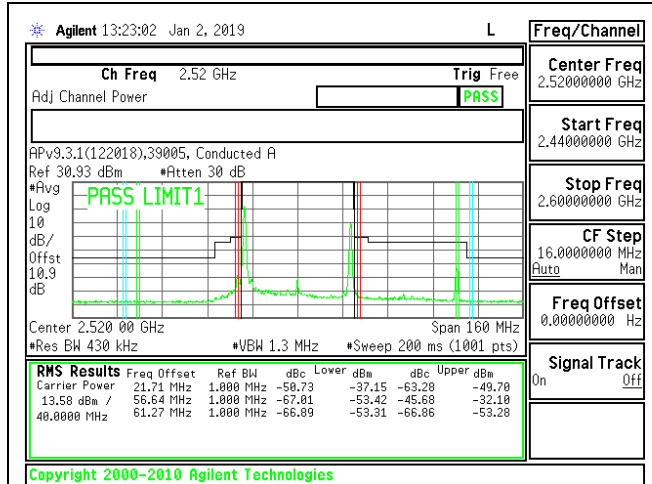


LTE B7 20MHz + 20MHz QPSK Low Ch RB1-0 + RB1-99

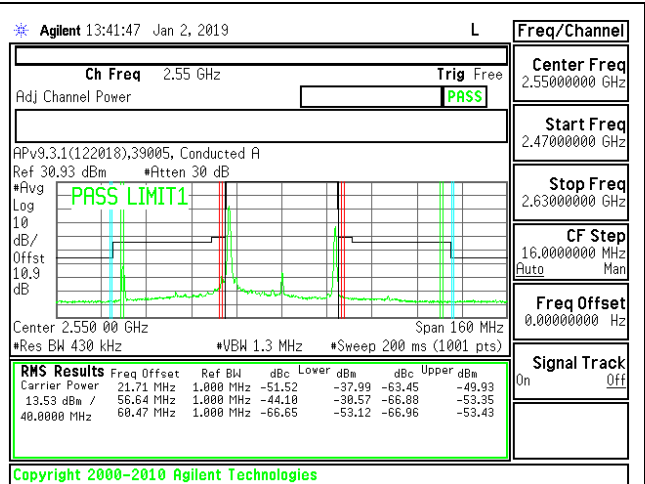


LTE B7 20MHz + 20MHz QPSK High Ch RB1-0 + RB1-99

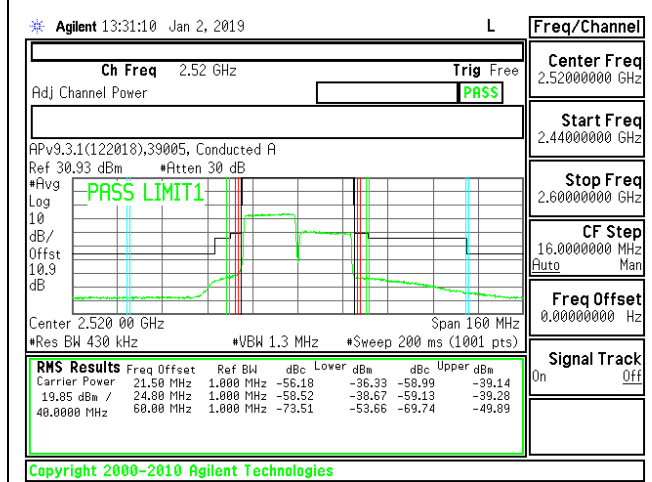


LTE B7 20MHz + 20MHz QPSK Low Ch RB100-0 + RB100-0

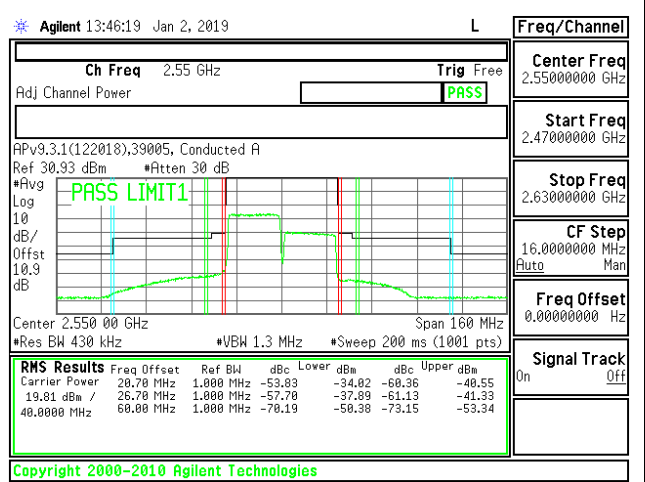


LTE B7 20MHz + 20MHz QPSK High Ch RB100-0 + RB100-0

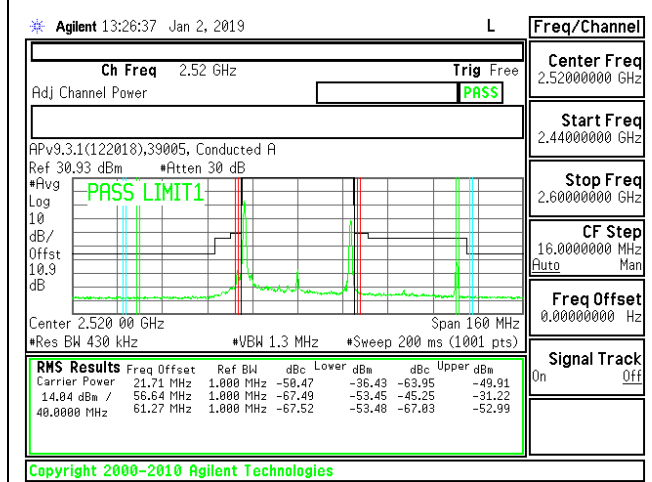


LTE B7 20MHz + 20MHz 16QAM Low Ch RB1-0 + RB1-99

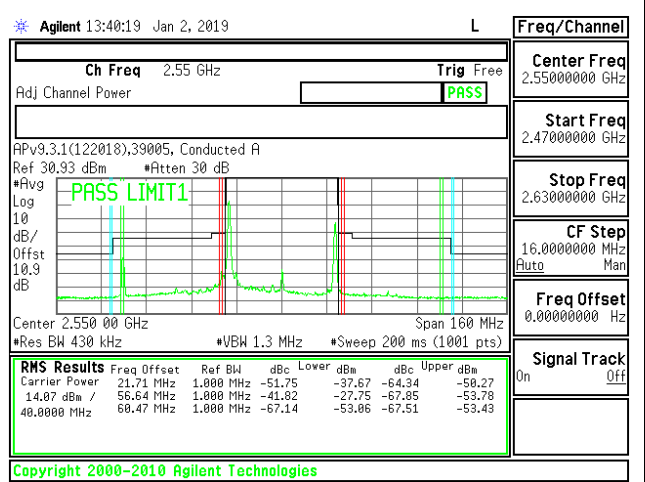


LTE B7 20MHz + 20MHz 16QAM High Ch RB1-0 + RB1-99

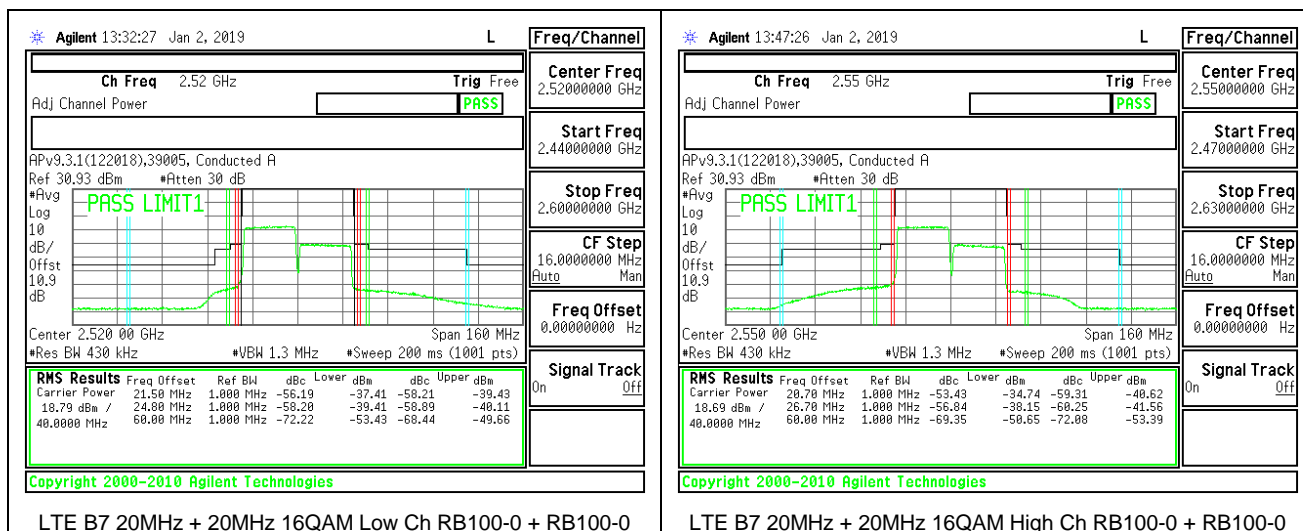


10MHz + 20 MHz

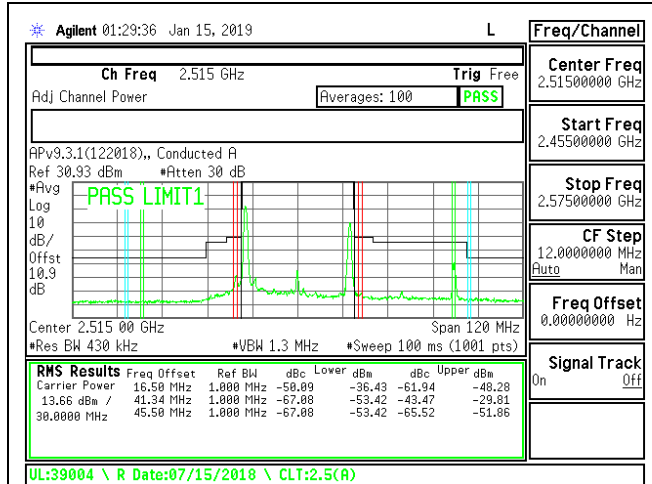


LTE B7 10MHz + 20MHz QPSK Low Ch RB1-0 + RB1-99

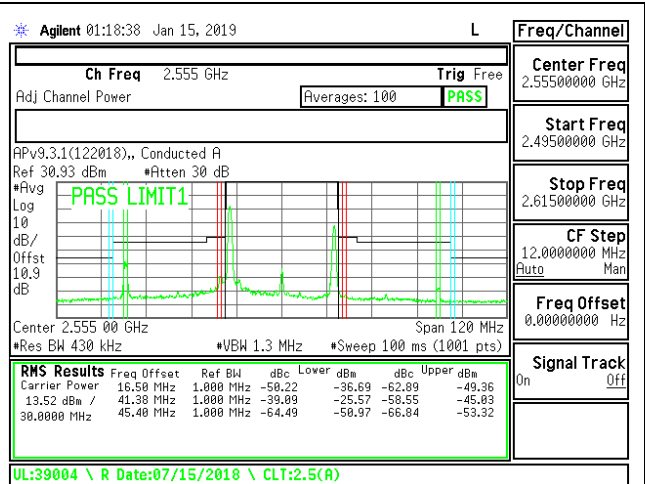


LTE B7 10MHz + 20MHz QPSK High Ch RB1-0 + RB1-9

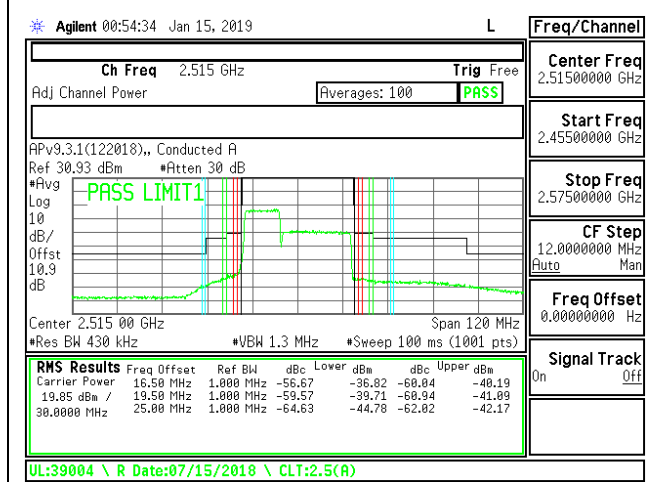


LTE B7 10MHz + 20MHz QPSK Low Ch RB50-0 + RB100-0

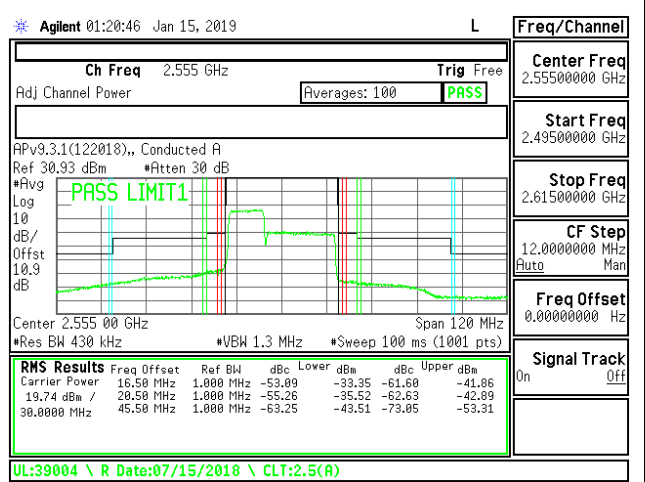


LTE B7 10MHz + 20MHz QPSK High Ch RB50-0 + RB100-0

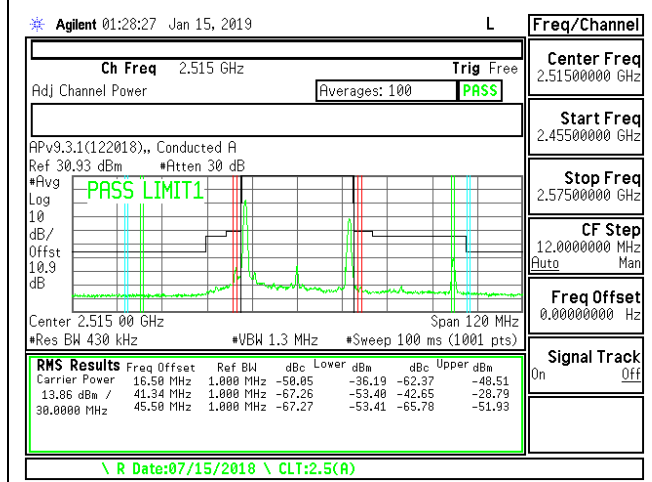

LTE B7 10MHz + 20MHz 16QAM Low Ch RB1-0 + RB1-99

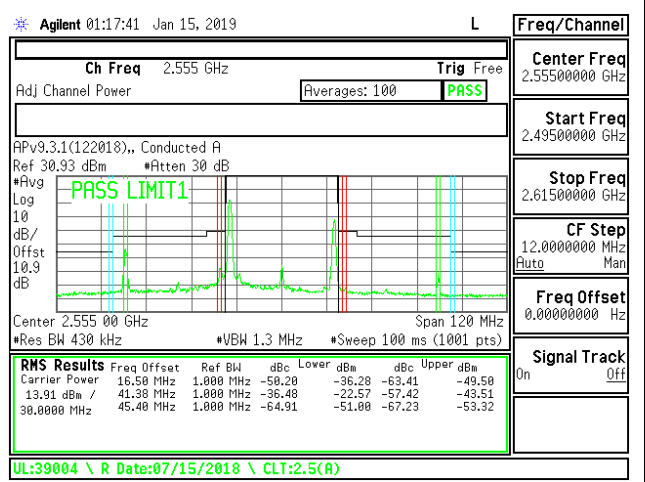


LTE B7 10MHz + 20MHz 16QAM High Ch RB1-0 + RB1-99

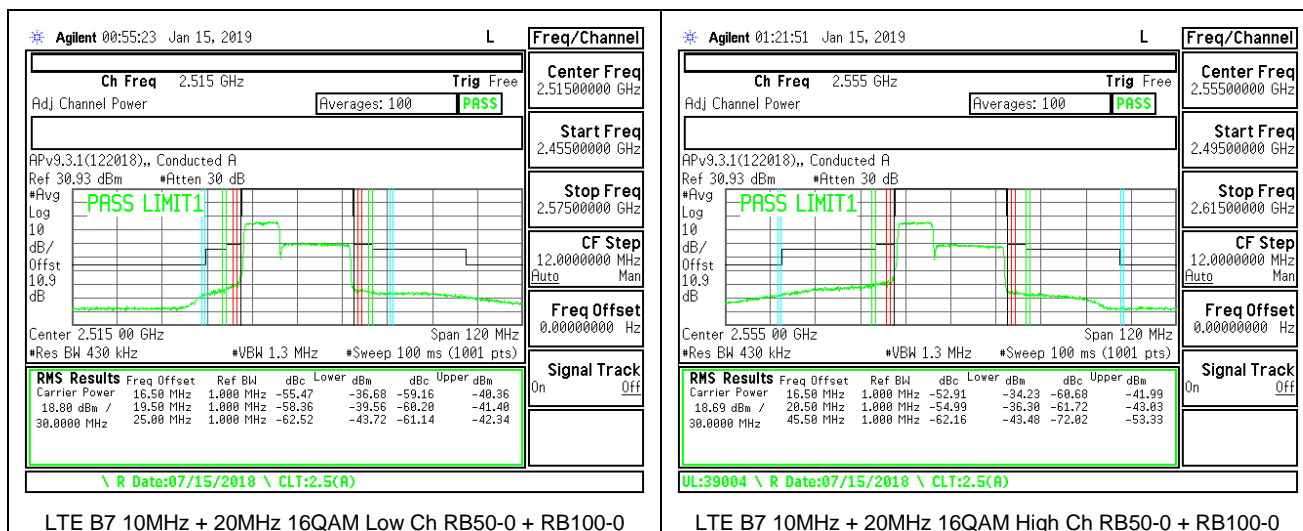





**15MHz +10MHz**

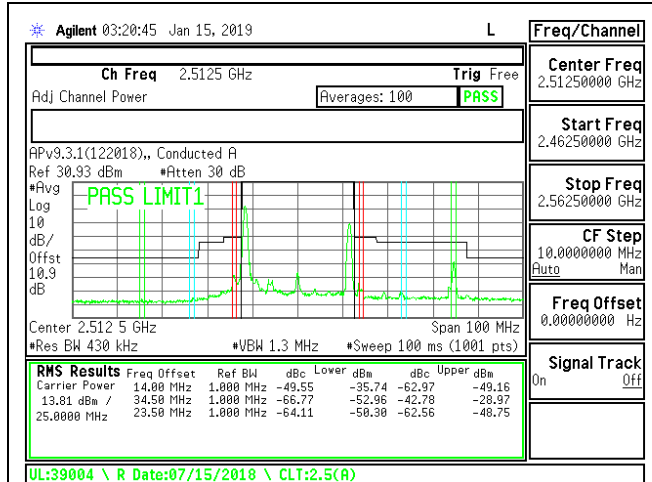


LTE B7 15MHz + 10MHz QPSK Low Ch RB1-0 + RB1-49

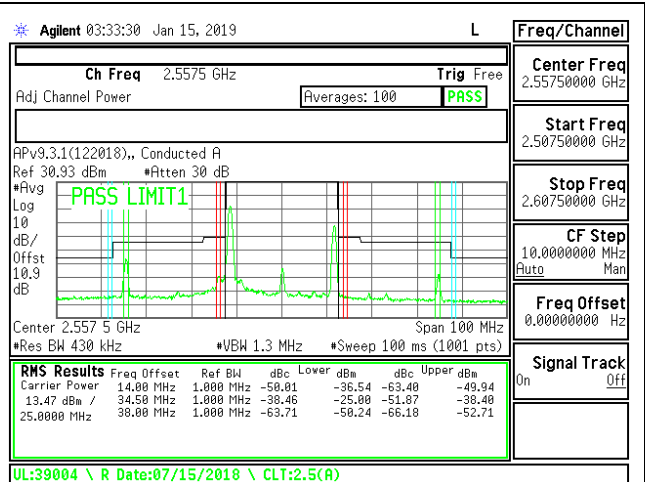


LTE B7 15MHz + 10MHz QPSK High Ch RB1-0 + RB1-49

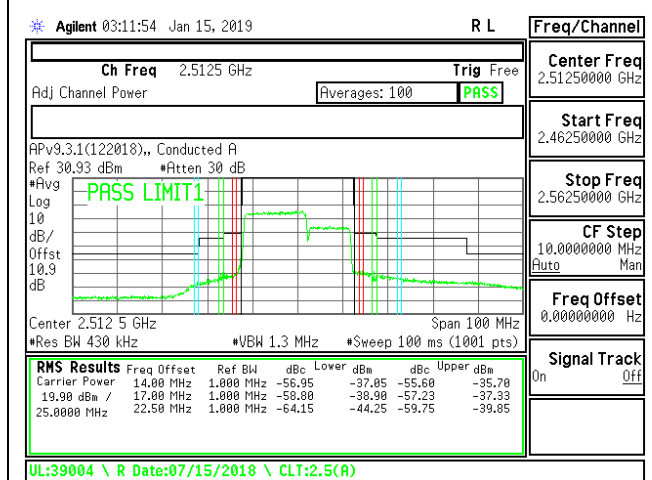


LTE B7 15MHz + 10MHz QPSK Low Ch RB75-0 + RB50-0

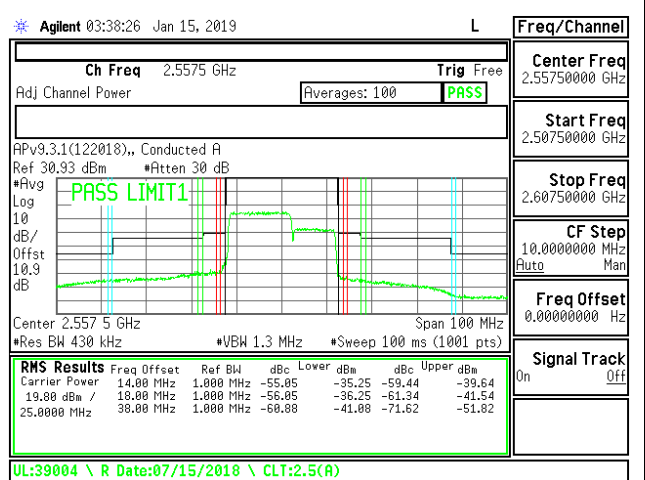


LTE B7 15MHz + 10MHz QPSK High Ch RB75-0 + RB50-0

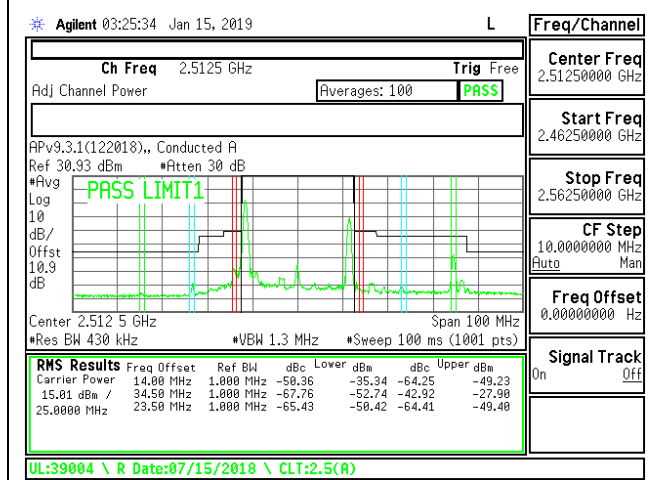


LTE B7 15MHz + 10MHz 16QAM Low Ch RB1-0 + RB1-49

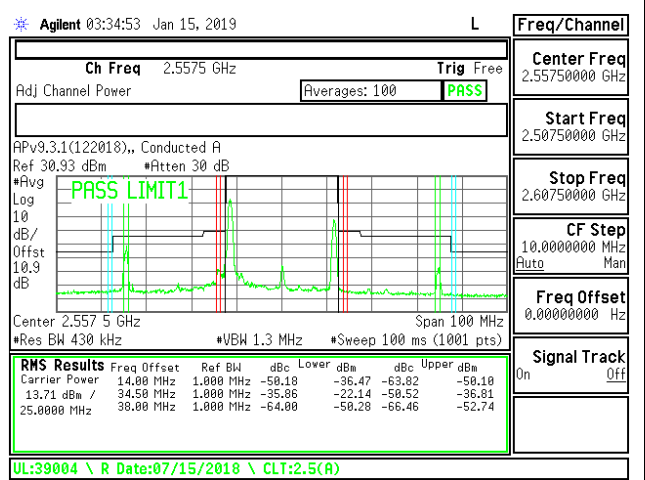


LTE B7 15MHz + 10MHz 16QAM High Ch RB1-0 + RB1-49

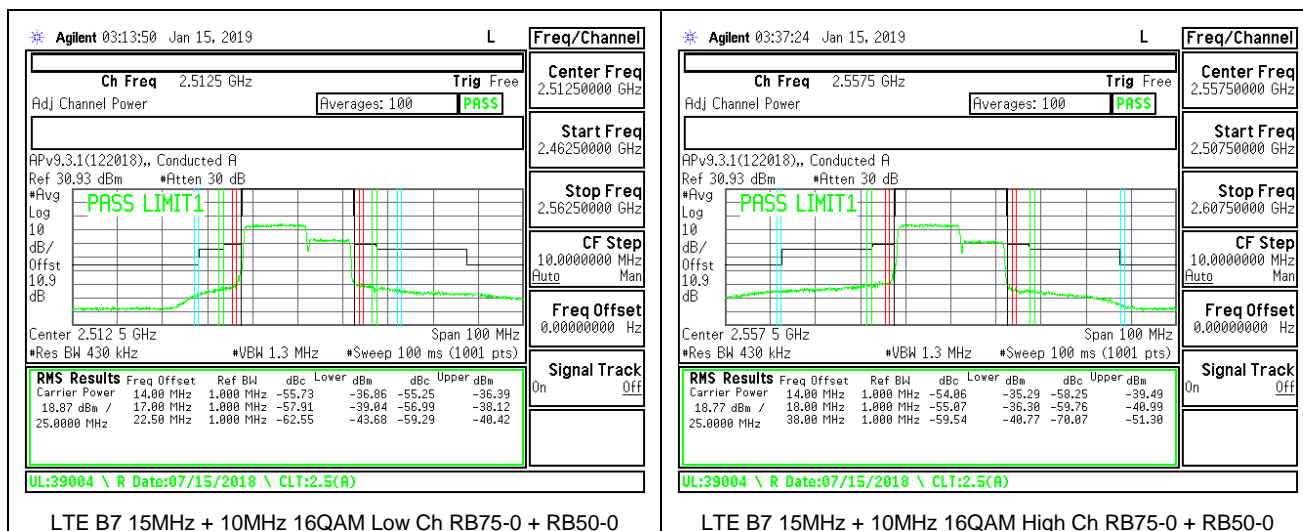


**15MHz + 15MHz**

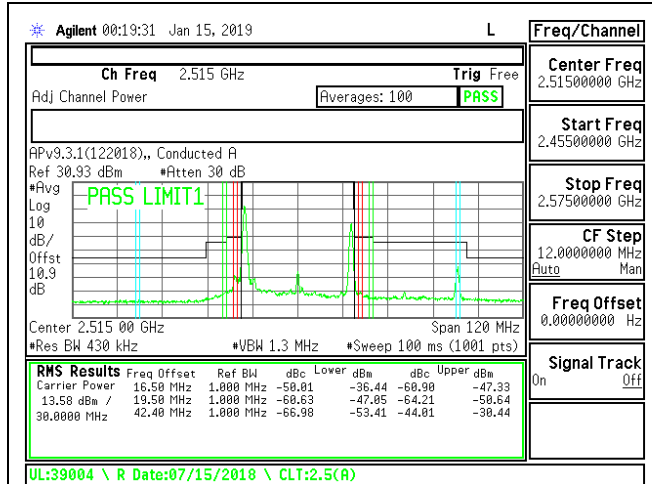


LTE B7 15MHz + 15MHz QPSK Low Ch RB1-0 + RB1-74

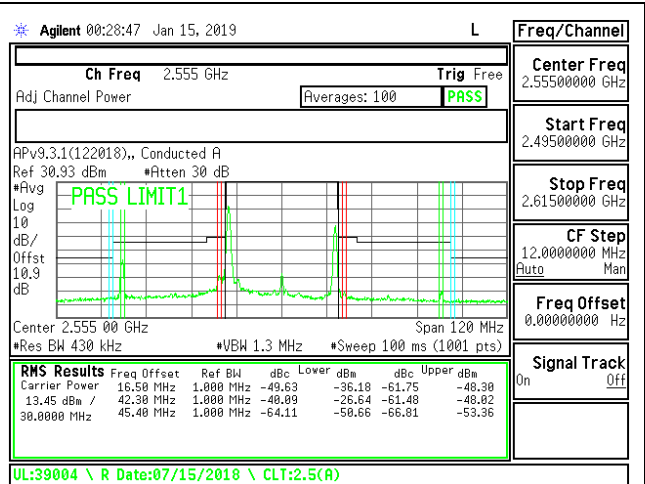


LTE B7 15MHz + 15MHz QPSK High Ch RB1-0 + RB1-74

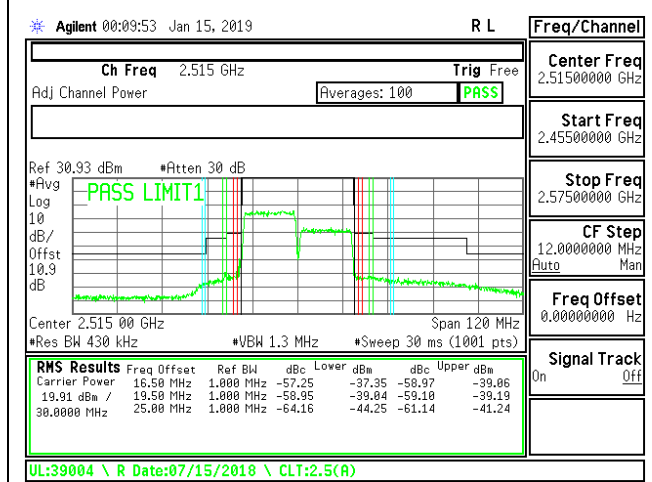


LTE B7 15MHz + 15MHz QPSK Low Ch RB75-0 + RB75-0

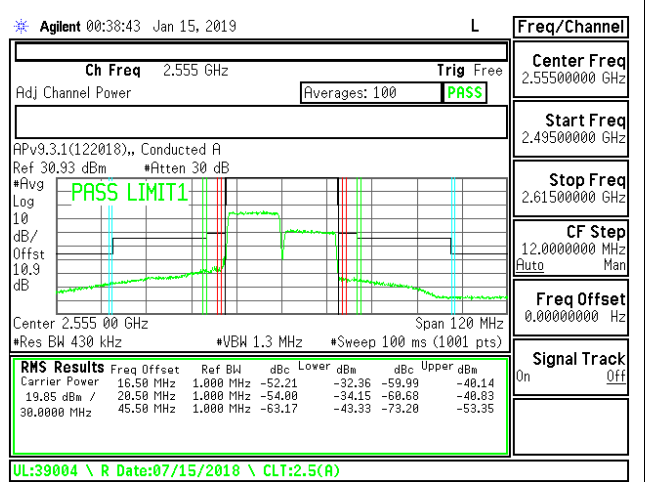


LTE B7 15MHz + 15MHz QPSK High Ch RB75-0 + RB75-0

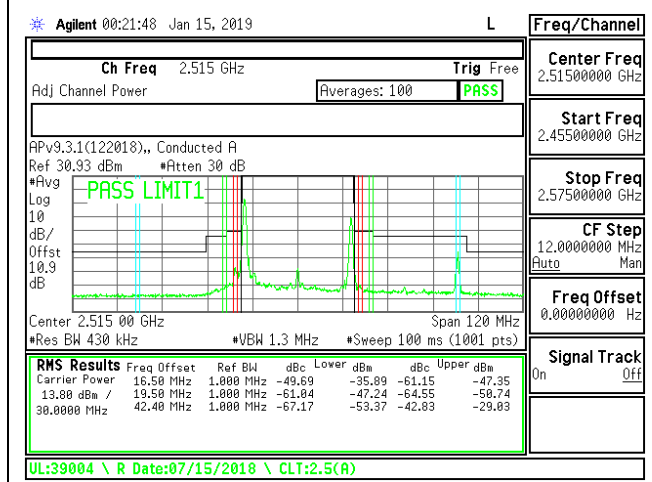


LTE B7 15MHz + 15MHz 16QAM Low Ch RB1-0 + RB1-74

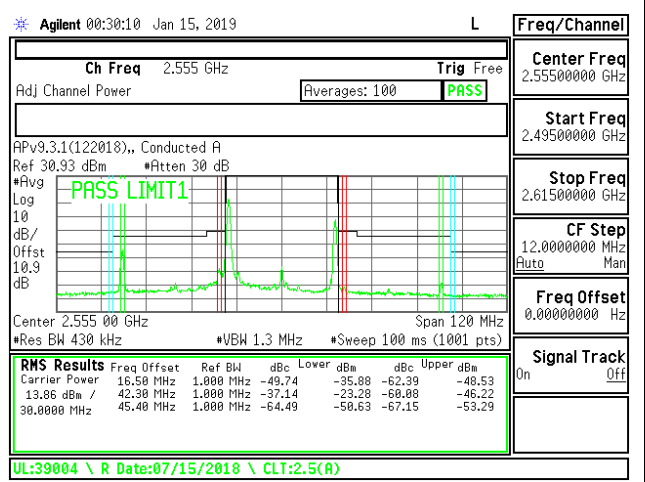


LTE B7 15MHz + 15MHz 16QAM High Ch RB1-0 + RB1-74

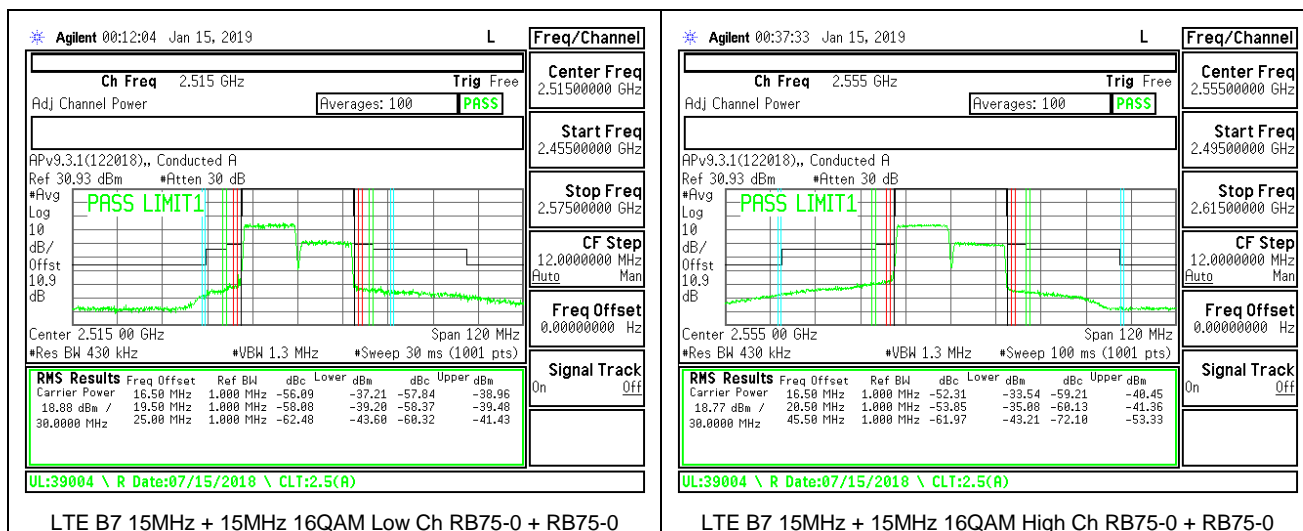


15MHz + 20MHz

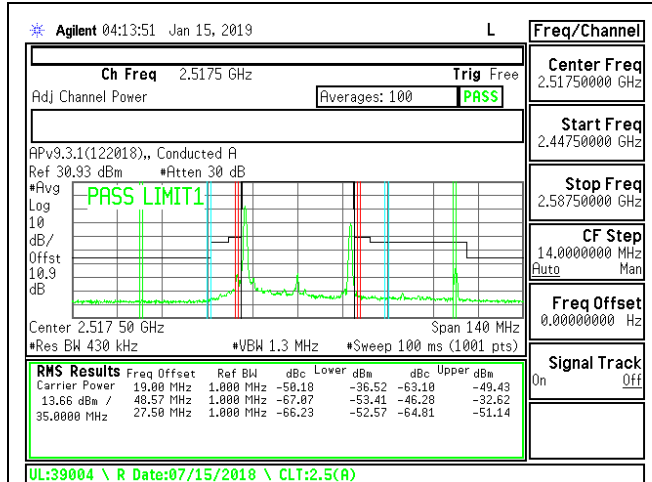


LTE B7 15MHz + 20MHz QPSK Low Ch RB1-0 + RB1-99

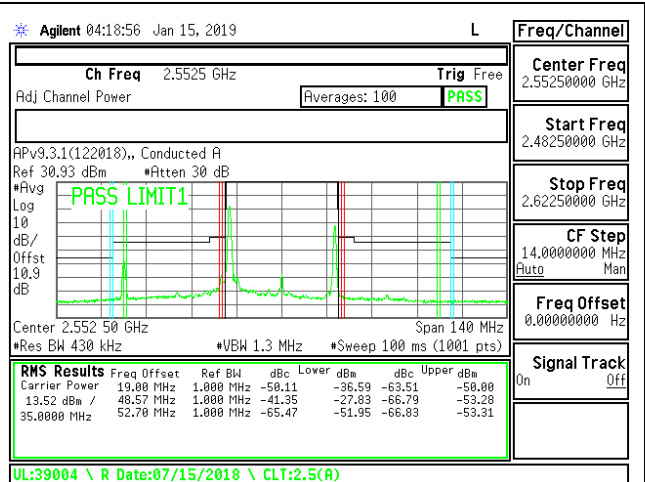


LTE B7 15MHz + 20MHz QPSK High Ch RB1-0 + RB1-99

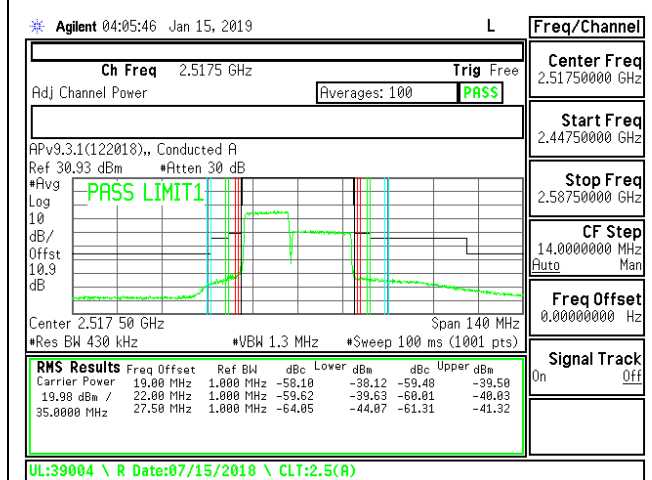


LTE B7 15MHz + 20MHz QPSK Low Ch RB75-0 + RB100-0

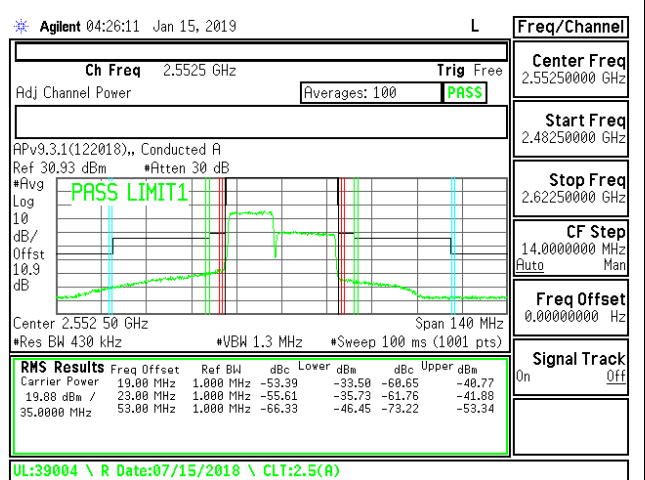


LTE B7 15MHz + 20MHz QPSK High Ch RB75-0 + RB100-0

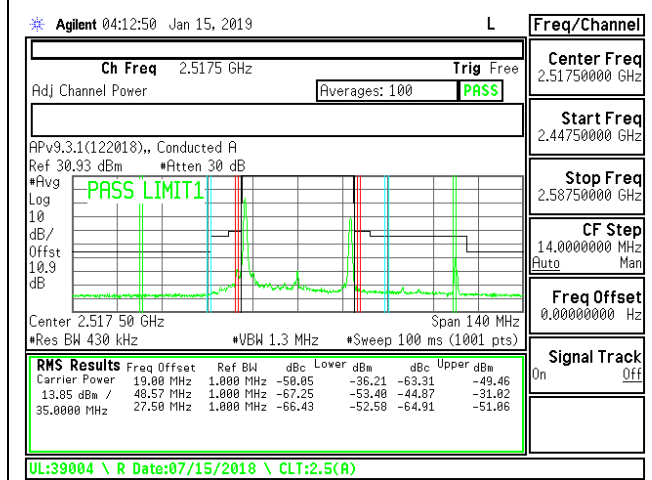


LTE B7 15MHz + 20MHz 16QAM Low Ch RB1-0 + RB1-99

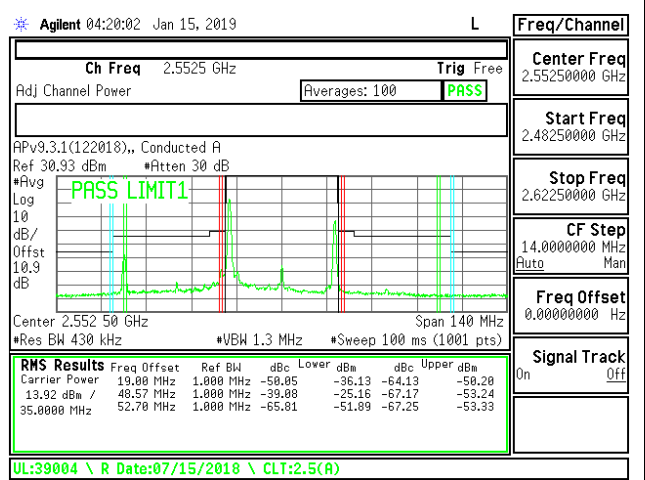


LTE B7 15MHz + 20MHz 16QAM High Ch RB1-0 + RB1-99

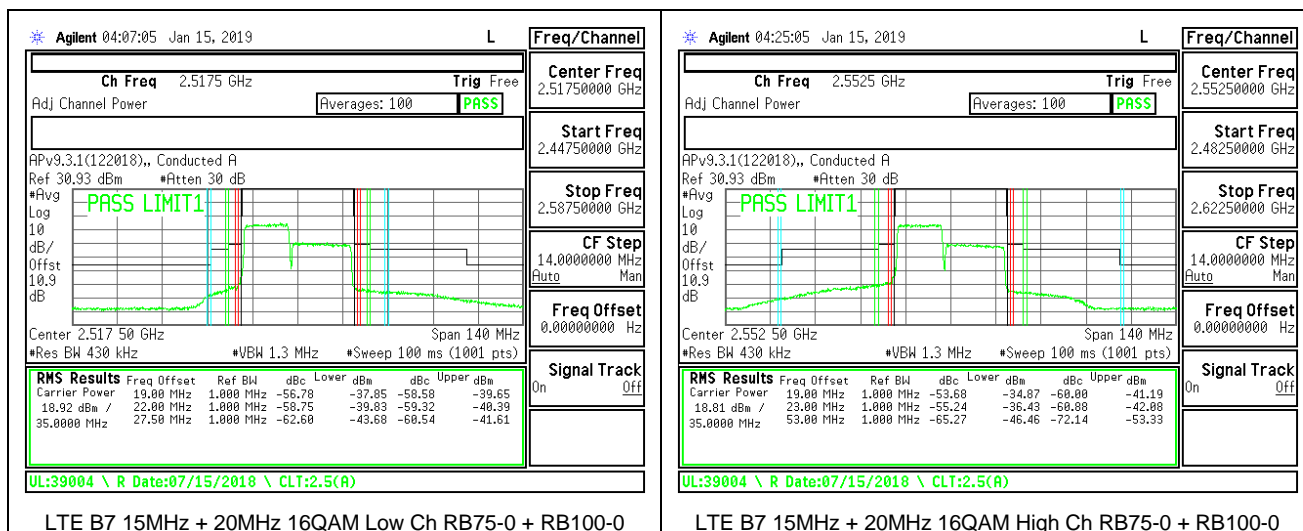


**20MHz + 15MHz**

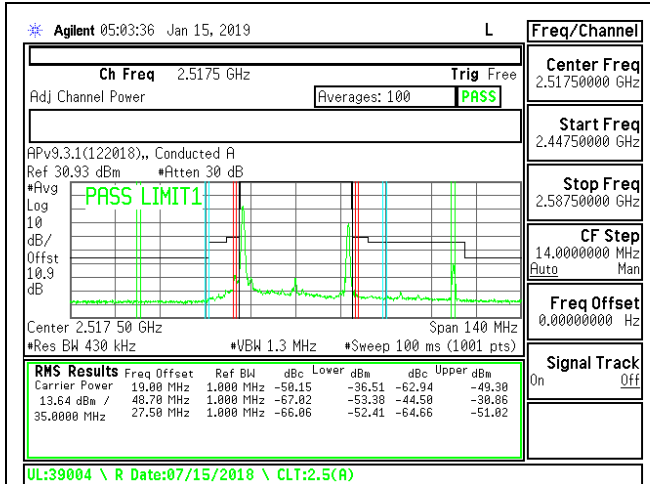


LTE B7 20MHz + 15MHz QPSK Low Ch RB1-0 + RB1-74

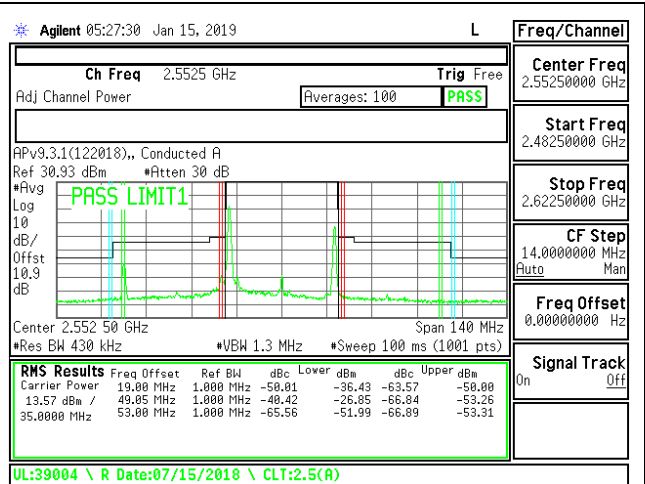


LTE B7 20MHz + 15MHz QPSK High Ch RB1-0 + RB1-74

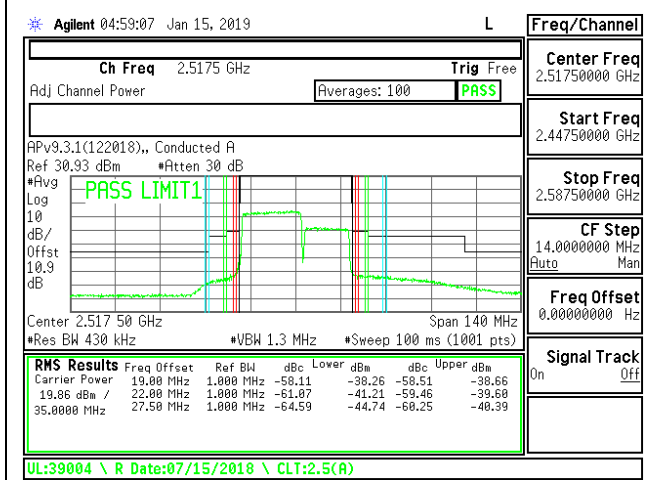


LTE B7 20MHz + 15MHz QPSK Low Ch RB100-0 + RB75-0

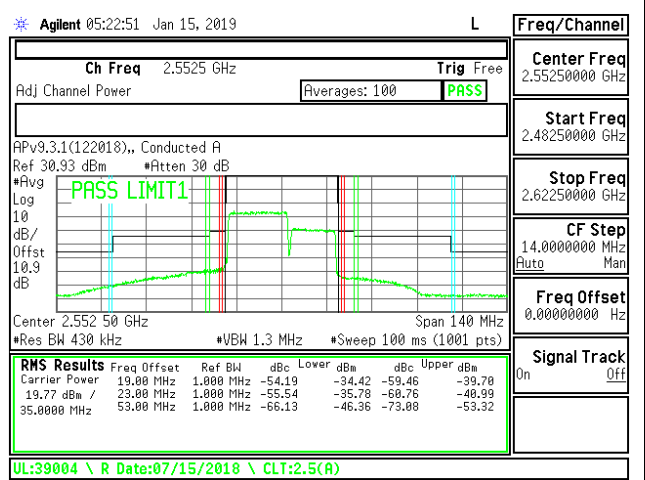



LTE B7 20MHz + 15MHz QPSK High Ch RB100-0 + RB75-0

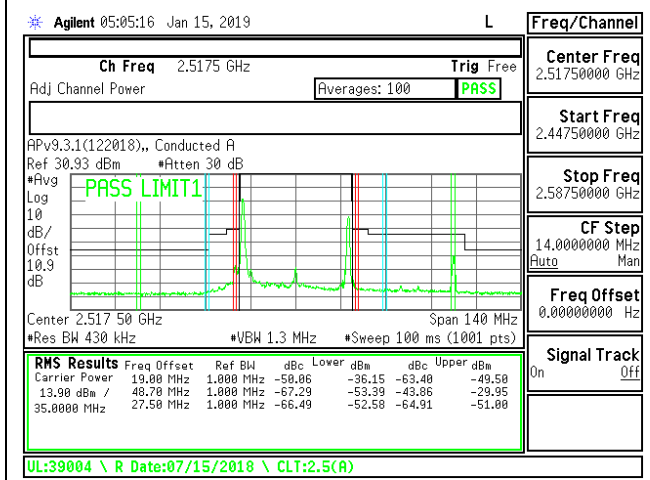

LTE B7 20MHz + 15MHz 16QAM Low Ch RB1-0 + RB1-74

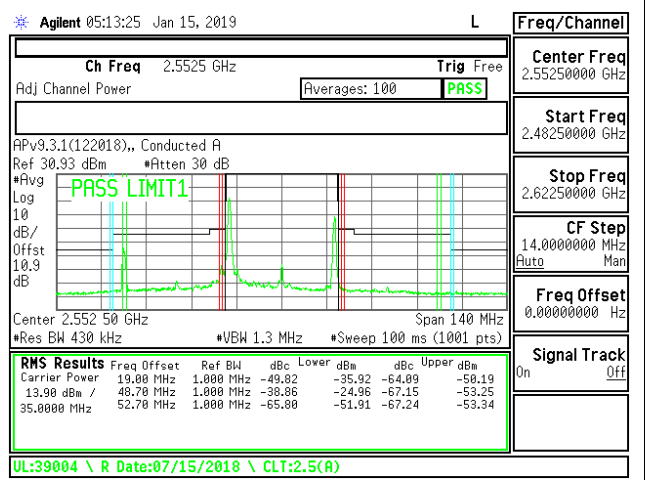


LTE B7 20MHz + 15MHz 16QAM High Ch RB1-0 + RB1-74

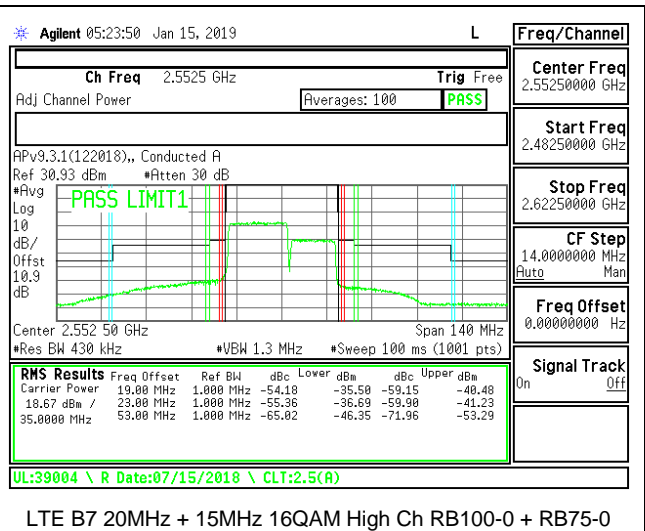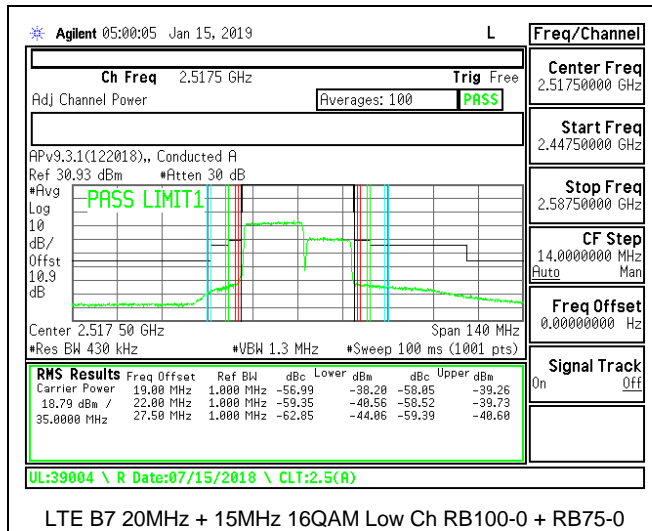




### 8.2.2. LTE BAND 38 ADJACENT CHANNEL POWER


#### 15MHz + 15MHz

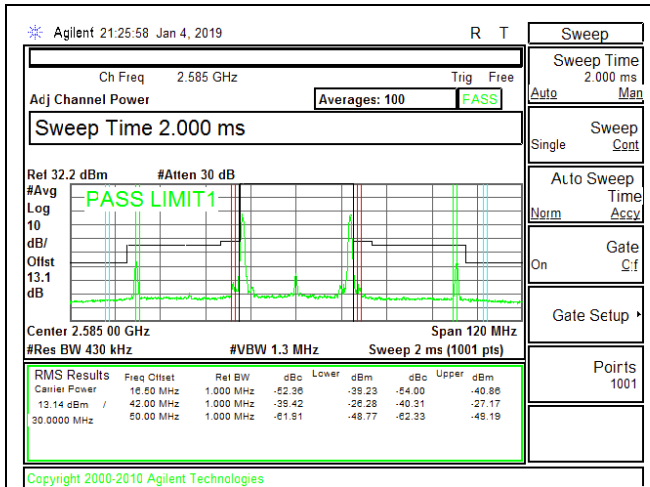


LTE B38 15MHz + 15MHz QPSK Low Ch RB1-0 + RB1-74

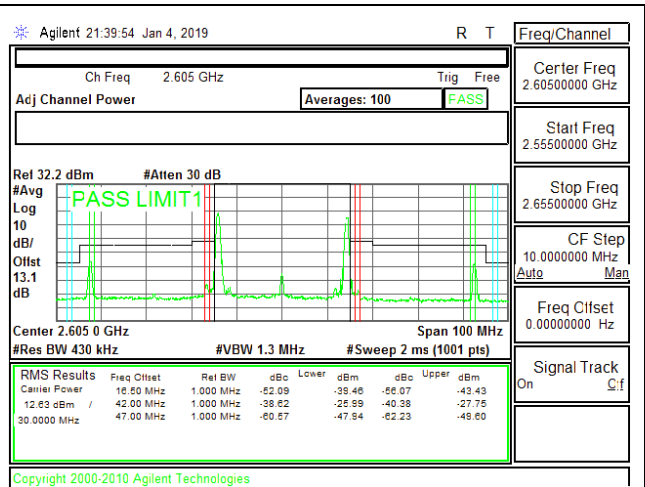


LTE B38 15MHz + 15MHz QPSK High Ch RB1-0 + RB1-74

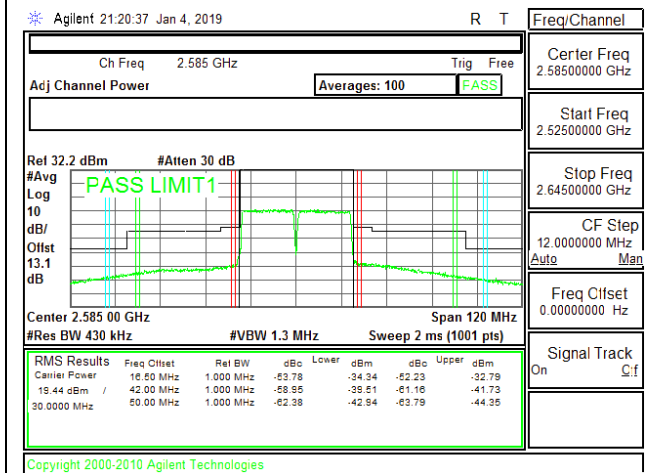


LTE B38 15MHz + 15MHz QPSK Low Ch RB75-0 + RB75-0

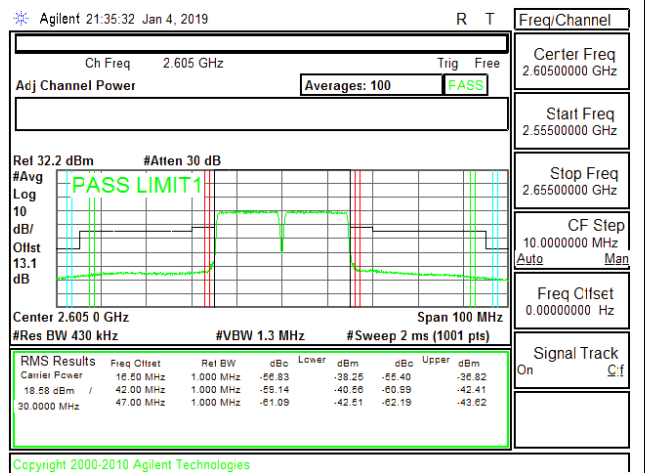


LTE B38 15MHz + 15MHz QPSK High Ch RB75-0 + RB75-0

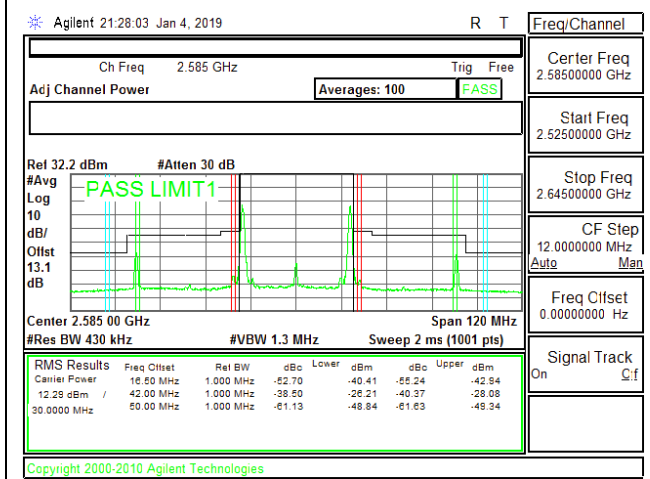


LTE B38 15MHz + 15MHz 16QAM Low Ch RB1-0 + RB1-74

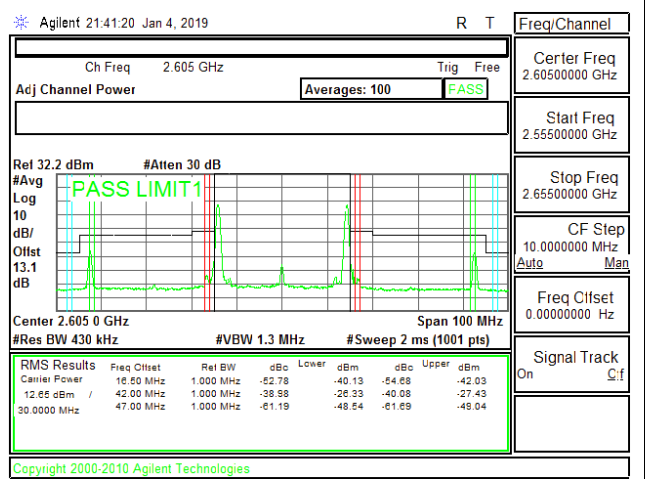


LTE B38 15MHz + 15MHz 16QAM High Ch RB1-0 + RB1-74

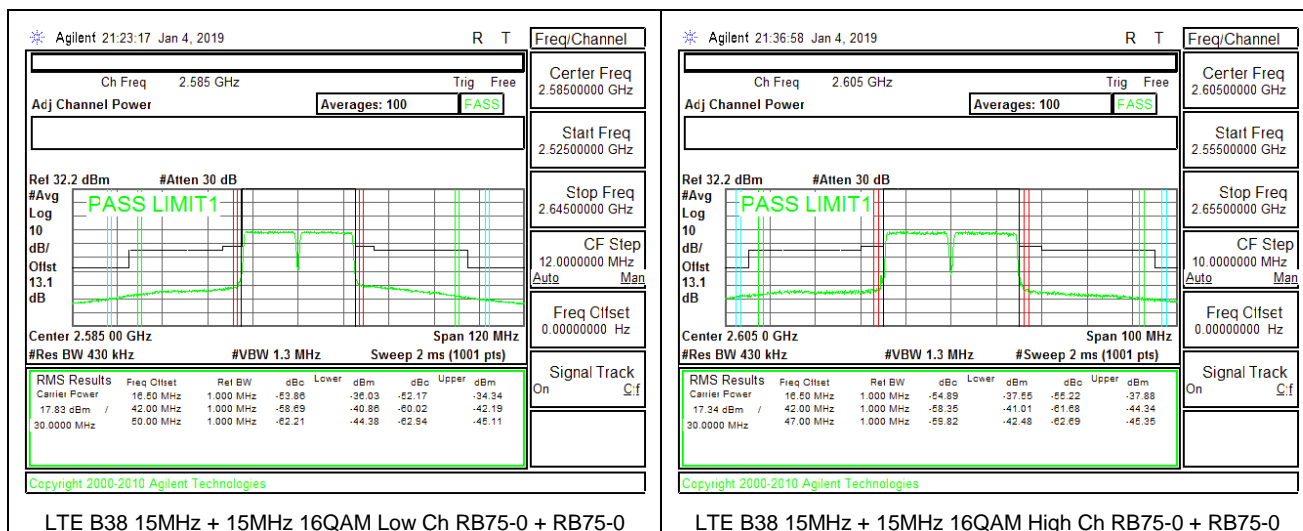


**20MHz + 20MHz**

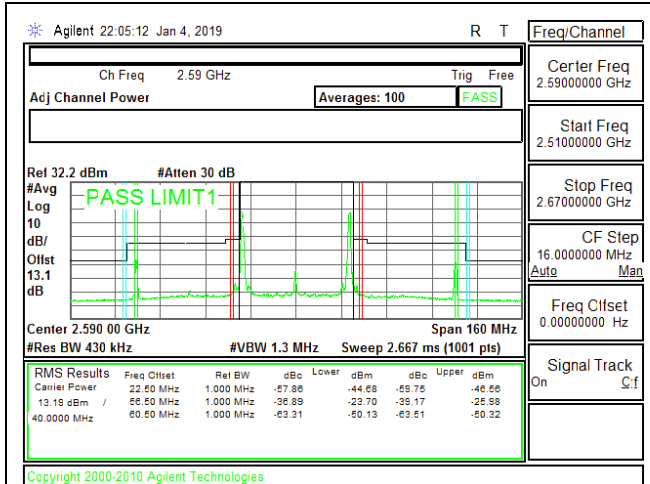


LTE B38 20MHz + 20MHz QPSK Low Ch RB1-0 + RB1-99

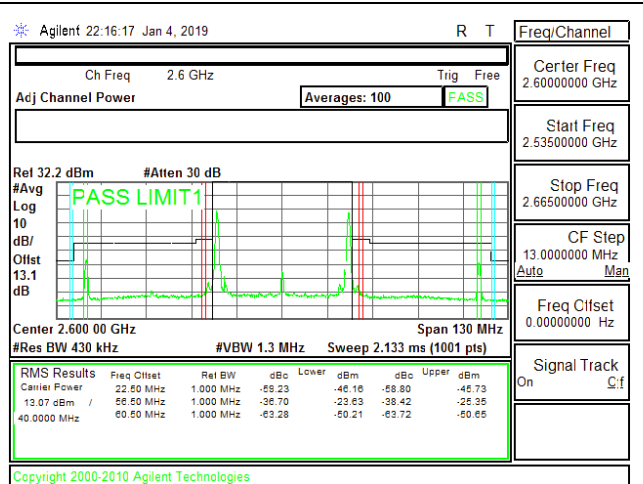


LTE B38 20MHz + 20MHz QPSK High Ch RB1-0 + RB1-99

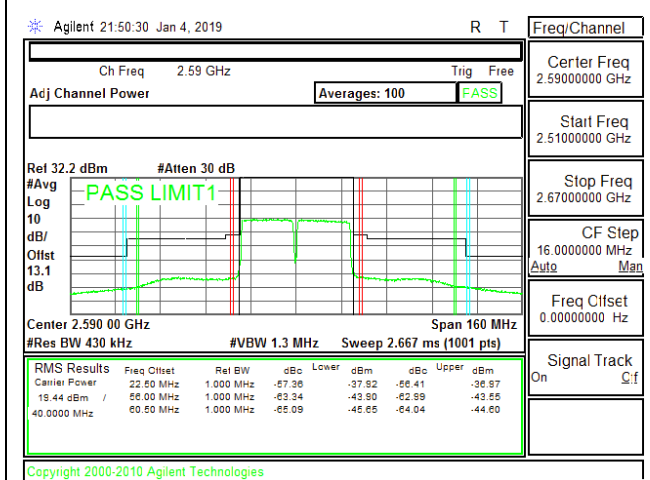


LTE B38 20MHz + 20MHz QPSK Low Ch RB100-0 + RB100-0

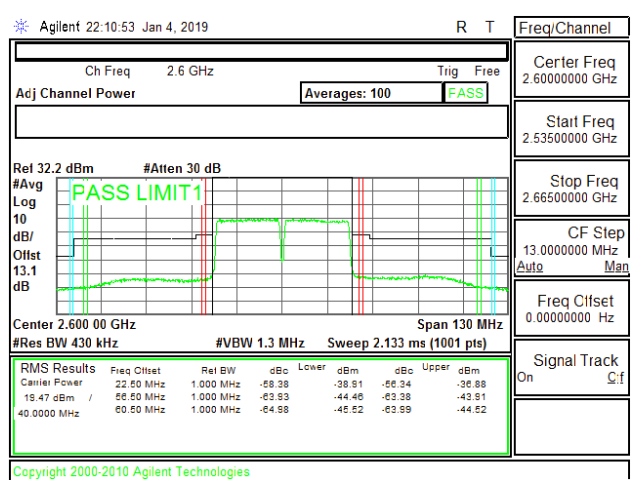


LTE B38 20MHz + 20MHz QPSK High Ch RB100-0 + RB100-0

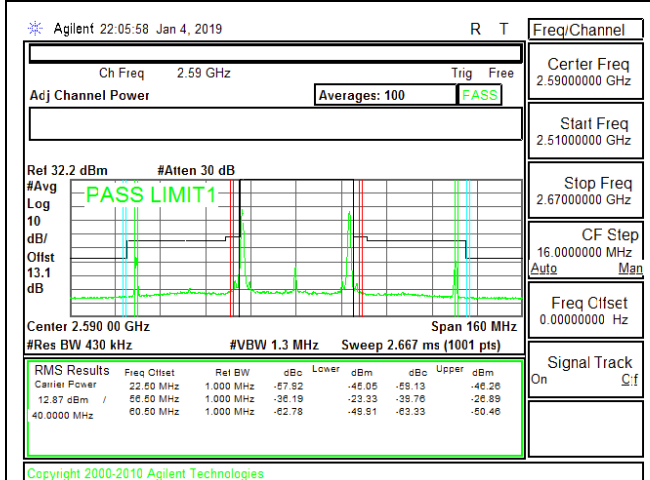

LTE B38 20MHz + 20MHz 16QAM Low Ch RB1-0 + RB1-99

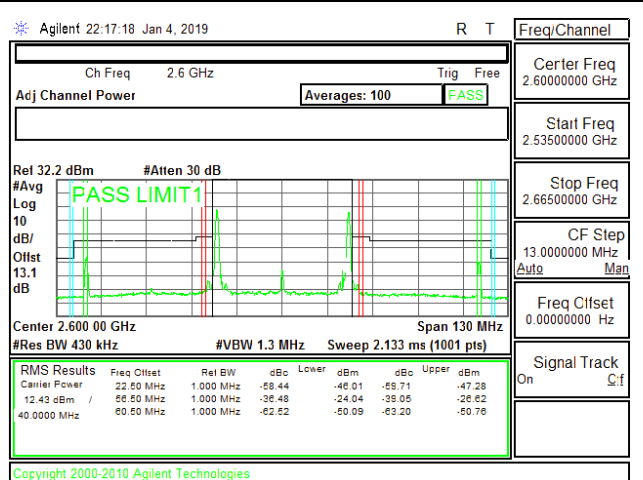

LTE B38 20MHz + 20MHz 16QAM High Ch RB1-0 + RB1-99

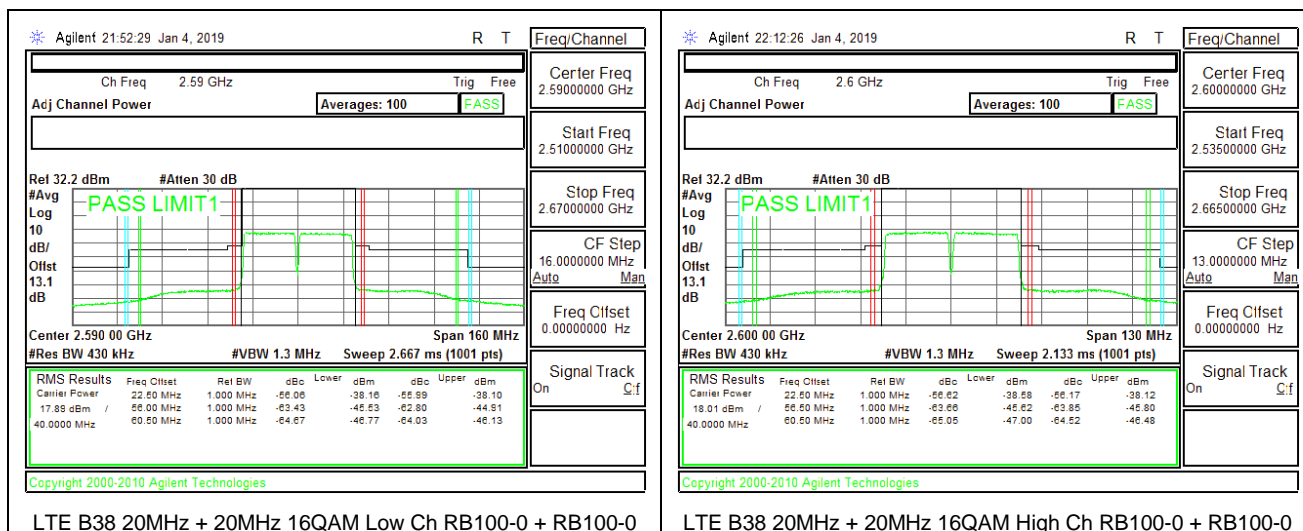

### **8.3. OUT OF BAND EMISSIONS**

#### **RULE PART(S)**

FCC: §2.1051 and §27.53

#### **LIMITS**

FCC: §27.53 (m) (7 and 38)

The minimum permissible attenuation level of any spurious emissions is  $55 + 10 \log (P)$  dB where transmitting power (P) in Watts.

#### **TEST PROCEDURE**

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm, -25dBm and -40dBm according to the band Limit
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


#### **MODES TESTED**

- LTE Band 7
- LTE Band 38


#### **RESULTS**

8.3.1. LTE BAND 7


LTE BAND 7 (20.0MHz + 20.0MHz)

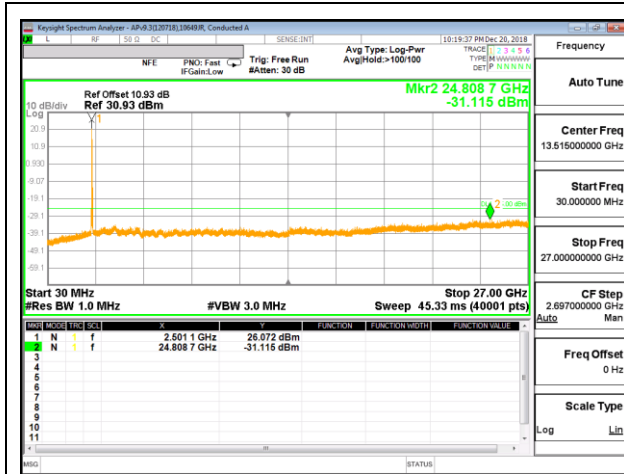


LTE B7 20MHz+20MHz QPSK Low Channel RB1-99 + RB1-0

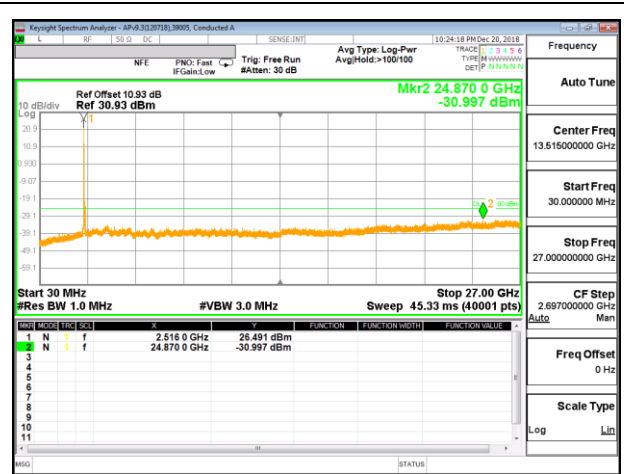


LTE B7 20MHz + 20MHz QPSK Mid Channel RB1-99 + RB1-0

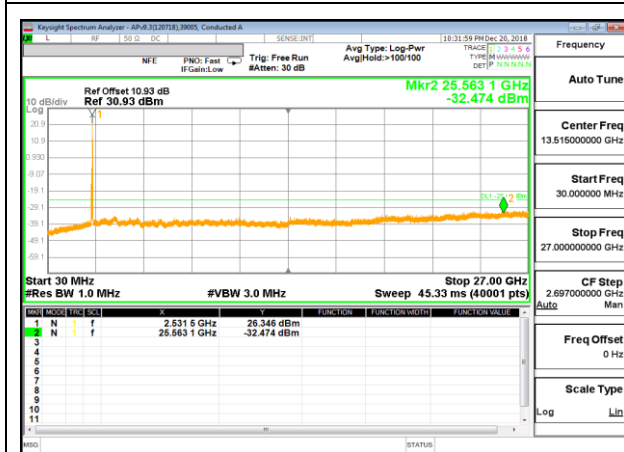


LTE B7 20MHz + 20MHz QPSK High Channel RB1-99 + RB1-0

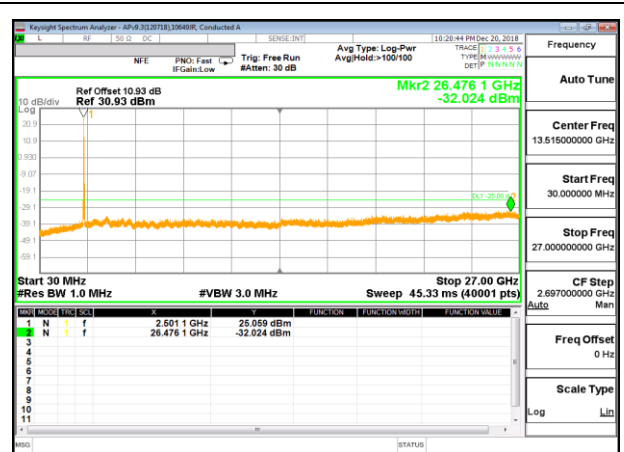

LTE B7 20MHz + 20MHz 16QAM Low Channel RB1-99 + RB1-0

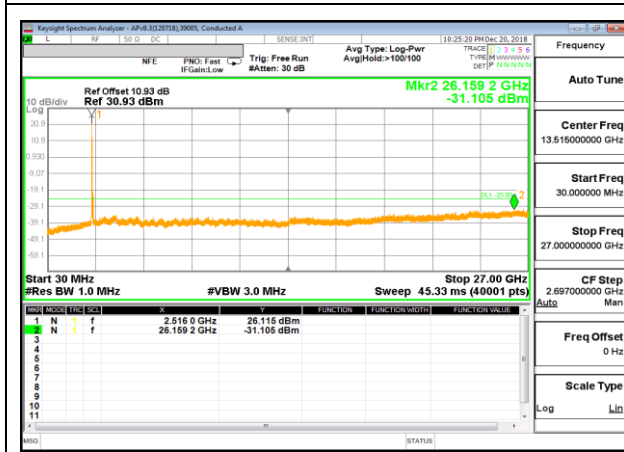

LTE B7 20MHz + 20MHz 16QAM Mid Channel RB1-99 + RB1-0

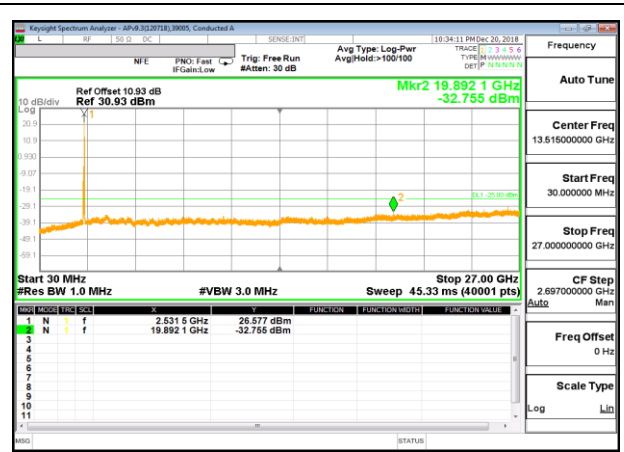

LTE B7 20MHz + 20MHz 16QAM High Channel RB1-99 + RB1-0

8.3.2. LTE BAND 38


LTE BAND 38 (20.0MHz + 20.0MHz)



LTE B38 20MHz + 20MHz QPSK Low Channel RB1-99 + RB1-0




LTE B7 20MHz + 20MHz QPSK Mid Channel RB1-99 + RB1-0

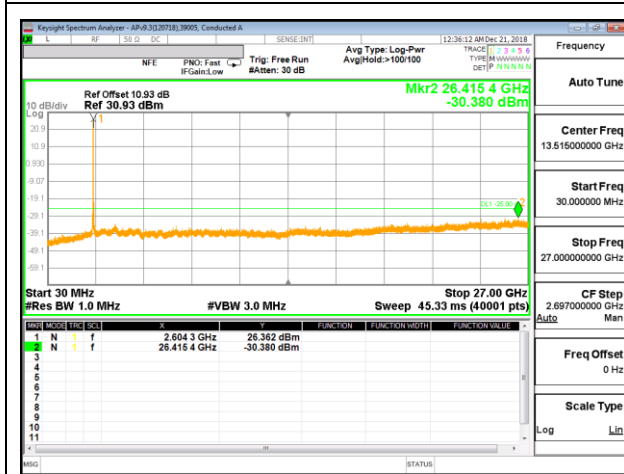


LTE B38 20MHz + 20MHz QPSK High Channel RB1-99 + RB1-0



LTE B38 20MHz+20MHz 16QAM Low Channel RB1-99 + RB1-0

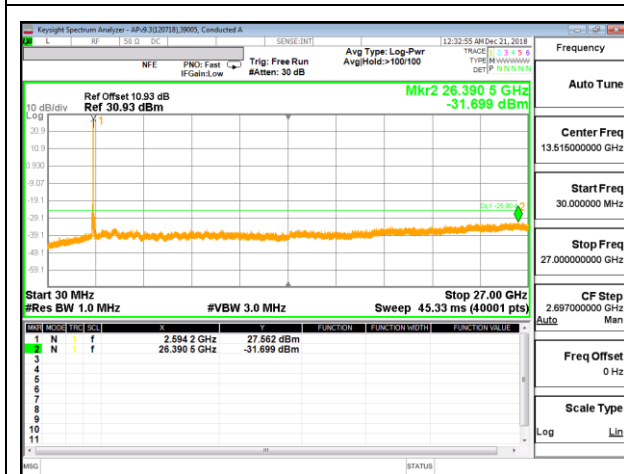

LTE B38 20MHz + 20MHz 16QAM Mid Channel RB1-99 + RB1-0

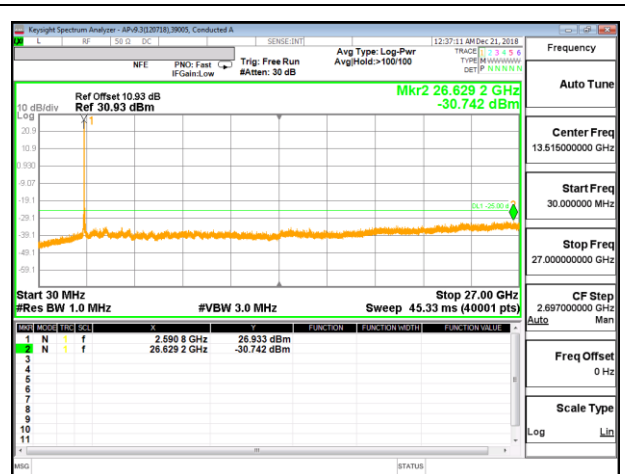

LTE B38 20MHz + 20MHz 16QAM High Channel RB1-99 + RB1-0

## **9. RADIATED TEST RESULTS**

### **9.1. FIELD STRENGTH OF SPURIOUS RADIATION**

#### **RULE PART(S)**

FCC: §2.1053 and §27.53

#### **LIMITS**

FCC: §27.53 (m) (Band 7, 41)

At least  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

#### **TEST PROCEDURE**

KDB 971168 D01 v02r02/D02 v01

TIA-603-E, Section 2.2.12.

#### **MODES TESTED**

- LTE Band 7
- LTE Band 38

#### **RESULTS**

No spurious emissions were detected above system noise floor from 18-26GHz.



**9.1.1. LTE BAND 7**

Company:	Samsung
Project #:	12563734
Date:	1/22/2018
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	20MHz +20MHz QPSK 1RB +1RB
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2510MHz + 2529.8MHz												
1	5.041	-69.96	Pk	34.6	-30.1	8.9	-56.56	-25	-31.56	0-360	149	H
2	5.042	-71.05	Pk	34.6	-30.1	9.1	-57.45	-25	-32.45	0-360	149	V
3	7.559	-70.52	Pk	36.3	-27.3	7.3	-54.22	-25	-29.22	0-360	149	H
4	7.563	-70.84	Pk	36.3	-27.4	7.4	-54.54	-25	-29.54	0-360	149	V
6	10.077	-72.26	Pk	37.6	-23.6	7.9	-50.36	-25	-25.36	0-360	149	V
5	10.084	-74.17	Pk	37.6	-23.4	7.8	-52.17	-25	-27.17	0-360	149	H
2525.1MHz+ 2544.9MHz												
1	5.069	-70.99	Pk	34.5	-29.8	8.6	-57.69	-25	-32.69	0-360	149	H
2	5.07	-69.71	Pk	34.5	-29.8	8.5	-56.51	-25	-31.51	0-360	149	V
4	7.605	-72.3	Pk	36.4	-26.8	7.6	-55.1	-25	-30.1	0-360	149	V
3	7.607	-72.43	Pk	36.4	-26.8	7.6	-55.23	-25	-30.23	0-360	149	H
6	10.14	-69.95	Pk	37.7	-23.7	6.4	-49.55	-25	-24.55	0-360	149	V
5	10.142	-72.54	Pk	37.7	-23.7	6.5	-52.04	-25	-27.04	0-360	149	H
2540.2MHz+2560MHz												
1	5.101	-70.15	Pk	34.5	-29.9	9.5	-56.05	-25	-31.05	0-360	149	H
2	5.103	-69.22	Pk	34.5	-29.9	9.5	-55.12	-25	-30.12	0-360	149	V
4	7.651	-74.04	Pk	36.4	-26.7	7.5	-56.84	-25	-31.84	0-360	149	V
3	7.653	-73.21	Pk	36.4	-26.7	7.6	-55.91	-25	-30.91	0-360	149	H
6	10.199	-72.38	Pk	37.8	-23.2	7	-50.78	-25	-25.78	0-360	149	V
5	10.2	-71.93	Pk	37.8	-23.2	6.9	-50.43	-25	-25.43	0-360	149	H

Company:	Samsung
Project #:	12563734
Date:	1/22/2018
Test Engineer:	19480
Configuration:	EUT+ Support Equipment
Mode:	20MHz+20MHz 16QAM 1RB+1RB
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2510MHz + 2529.8MHz												
2	5.039	-71.28	Pk	34.6	-30.2	8.9	-57.98	-25	-32.98	0-360	149	V
1	5.04	-70.81	Pk	34.6	-30.2	8.9	-57.51	-25	-32.51	0-360	149	H
3	7.557	-70.96	Pk	36.3	-27.3	7.3	-54.66	-25	-29.66	0-360	149	H
4	7.56	-72.17	Pk	36.3	-27.4	7.3	-55.97	-25	-30.97	0-360	149	V
5	10.08	-71.01	Pk	37.6	-23.5	7.9	-49.01	-25	-24.01	0-360	149	H
6	10.082	-71.97	Pk	37.6	-23.4	7.9	-49.87	-25	-24.87	0-360	149	V
2525.1MHz+ 2544.9MHz												
1	5.07	-70.93	Pk	34.5	-29.8	8.6	-57.63	-25	-32.63	0-360	149	H
2	5.07	-70.89	Pk	34.5	-29.8	8.6	-57.59	-25	-32.59	0-360	149	V
3	7.603	-71.93	Pk	36.4	-26.8	7.7	-54.63	-25	-29.63	0-360	149	H
4	7.605	-73.86	Pk	36.4	-26.8	7.6	-56.66	-25	-31.66	0-360	149	V
5	10.14	-72.23	Pk	37.7	-23.7	6.4	-51.83	-25	-26.83	0-360	149	H
6	10.14	-69.92	Pk	37.7	-23.7	6.4	-49.52	-25	-24.52	0-360	149	V
2540.2MHz+2560MHz												
1	5.097	-69.8	Pk	34.5	-30.1	9.3	-56.1	-25	-31.1	0-360	149	H
2	5.103	-71.01	Pk	34.5	-29.9	9.5	-56.91	-25	-31.91	0-360	149	V
3	7.648	-73.38	Pk	36.4	-26.7	7.6	-56.08	-25	-31.08	0-360	149	H
4	7.652	-73.53	Pk	36.4	-26.7	7.5	-56.33	-25	-31.33	0-360	149	V
6	10.2	-71.47	Pk	37.8	-23.2	6.9	-49.97	-25	-24.97	0-360	149	V
5	10.201	-73.35	Pk	37.8	-23.2	6.9	-51.85	-25	-26.85	0-360	149	H

**9.1.2. LTE BAND 38**

Company:	Samsung
Project #:	12563734
Date:	12/28/2018
Test Engineer:	39339
Configuration:	EUT+ Support Equipment
Mode:	20MHz+20MHz QPSK 1RB+1RB
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2580MHz+2599.8MHz												
1	5.143	-65.87	Pk	34.6	-30	8.8	-52.47	-25	-27.47	0-360	149	H
4	5.16	-69.25	Pk	34.6	-29.8	9.4	-55.05	-25	-30.05	0-360	149	V
2	7.742	-72.04	Pk	36.4	-26.9	7.3	-55.24	-25	-30.24	0-360	149	H
5	7.743	-70.78	Pk	36.4	-26.8	7.4	-53.78	-25	-28.78	0-360	149	V
3	10.285	-66.17	Pk	37.8	-23.5	7.2	-44.67	-25	-19.67	0-360	149	H
6	10.358	-71.35	Pk	37.8	-22.8	7.2	-49.15	-25	-24.15	0-360	149	V
2585.1MHz+2604.9MHz												
1	5.152	-67.33	Pk	34.6	-29.9	9.2	-53.43	-25	-28.43	0-360	149	H
4	5.159	-70.25	Pk	34.6	-29.8	9.3	-56.15	-25	-31.15	0-360	149	V
2	7.728	-70.27	Pk	36.5	-27.1	7.4	-53.47	-25	-28.47	0-360	149	H
5	7.764	-72.06	Pk	36.4	-26.5	7.9	-54.26	-25	-29.26	0-360	149	V
3	10.305	-69.03	Pk	37.8	-23.4	7.2	-47.43	-25	-22.43	0-360	149	H
6	10.305	-70.22	Pk	37.8	-23.4	7.3	-48.52	-25	-23.52	0-360	149	V
2590.2MHz+2610MHz												
1	5.162	-66.85	Pk	34.6	-29.7	9.3	-52.65	-25	-27.65	0-360	149	H
4	5.168	-69.99	Pk	34.6	-29.5	9.4	-55.49	-25	-30.49	0-360	149	V
5	7.773	-71.99	Pk	36.4	-26.5	8	-54.09	-25	-29.09	0-360	149	V
2	8.043	-70.31	Pk	36.4	-26.4	8.1	-52.21	-25	-27.21	0-360	149	H
3	10.325	-67.71	Pk	37.8	-23.2	6.9	-46.21	-25	-21.21	0-360	149	H
6	10.397	-72.35	Pk	37.9	-22.9	7.3	-50.05	-25	-25.05	0-360	149	V

Company:	Samsung
Project #:	12563734
Date:	12/28/2018
Test Engineer:	39339
Configuration:	EUT+ Support Equipment
Mode:	20MHz+20MHz 16QAM 1RB+1RB
Chamber #:	Chamber B

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	AF T863 (dB/m)	Amp/Cbl (dB)	Amp/Cbl (dB)	Corrected Reading (dBm)	LTE Limit	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2580MHz+2599.8MHz												
1	5.142	-65.31	PK	34.6	-30	8.8	-51.91	-25	-26.91	0-360	149	H
4	5.162	-69.82	PK	34.6	-29.7	9.4	-55.52	-25	-30.52	0-360	149	V
2	7.736	-72.12	PK	36.4	-26.7	7.5	-54.92	-25	-29.92	0-360	149	H
5	7.742	-72.05	PK	36.4	-26.9	7.4	-55.15	-25	-30.15	0-360	149	V
3	10.284	-73	PK	37.8	-23.5	7.2	-51.5	-25	-26.5	0-360	149	H
6	10.34	-73.86	PK	37.8	-23	6.7	-52.36	-25	-27.36	0-360	149	V
2585.1MHz+2604.9MHz												
1	5.152	-67.33	PK	34.6	-29.9	9.2	-53.43	-25	-28.43	0-360	149	H
4	5.166	-69.89	PK	34.6	-29.5	9.4	-55.39	-25	-30.39	0-360	149	V
5	7.735	-70.94	PK	36.4	-26.7	7.7	-53.54	-25	-28.54	0-360	149	V
2	7.746	-71.01	PK	36.4	-26.8	7.4	-54.01	-25	-29.01	0-360	149	H
3	10.305	-67.6	PK	37.8	-23.4	7.2	-46	-25	-21	0-360	149	H
6	10.386	-74.26	PK	37.9	-22.7	7.8	-51.26	-25	-26.26	0-360	149	V
2590.2MHz+2610MHz												
1	5.163	-67.38	PK	34.6	-29.6	9.3	-53.08	-25	-28.08	0-360	149	H
4	5.213	-69.27	PK	34.7	-29.5	9.2	-54.87	-25	-29.87	0-360	149	V
5	7.745	-70.65	PK	36.4	-26.8	7.4	-53.65	-25	-28.65	0-360	149	V
2	7.779	-72.35	PK	36.4	-26.7	7.7	-54.95	-25	-29.95	0-360	149	H
3	10.428	-72.55	PK	37.9	-23.1	7.8	-49.95	-25	-24.95	0-360	149	H
6	10.482	-73.5	PK	37.8	-23.1	8	-50.8	-25	-25.8	0-360	149	V