



**MEASUREMENT REPORT
FCC Part 22 & 90**

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
10/23 - 12/19/2018
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
1M1810250193-04.A3L

FCC ID:	A3LSMG970U
APPLICANT:	Samsung Electronics Co., Ltd.

Application Type: Certification
Model: SM-G970U
Additional Model(s): SM-G970U1, SM-G970W, SM-G970XU
HVIN: SM-G970W
EUT Type: Portable Handset
FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
FCC Rule Part: §2.1049, §22(H), §90(R), §90(S)
Test Procedure(s): ANSI C63.26-2015, ANSI/TIA-603-E-2016, KDB 971168 D01 v03r01, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


Randy Ortanez
President




FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 1 of 70	

TABLE OF CONTENTS


1.0	INTRODUCTION	4
1.1	Scope	4
1.2	PCTEST Test Location	4
1.3	Test Facility / Accreditations	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities	5
2.3	Test Configuration	5
2.4	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Evaluation Procedure	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary	10
7.2	Occupied Bandwidth	12
7.3	Spurious and Harmonic Emissions at Antenna Terminal	28
7.4	Band Edge Emissions at Antenna Terminal	39
7.5	Conducted Power Output Data	50
7.6	Radiated Power (ERP)	51
7.7	Radiated Spurious Emissions Measurements	54
7.8	Frequency Stability / Temperature Variation	63
8.0	CONCLUSION	70

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 2 of 70	



MEASUREMENT REPORT

FCC Part 22(H) & 90



Mode	Tx Frequency (MHz)	Measurement	Max. Power (W)	Max. Power (dBm)	Emission Designator	Modulation
CDMA800 (BC10)	817.9 - 823.1	Conducted	0.315	24.98	1M27F9W	CDMA
LTE Band 14	790.5 - 795.5	ERP	0.104	20.17	4M54G7D	QPSK
			0.086	19.35	4M53W7D	16-QAM
			0.066	18.22	4M54W7D	64-QAM
			0.035	15.46	4M51W7D	256-QAM
	793		0.102	20.07	9M03G7D	QPSK
			0.089	19.47	9M06W7D	16-QAM
			0.068	18.33	9M02W7D	64-QAM
			0.036	15.56	9M00W7D	256-QAM
LTE Band 26	814.7 - 823.3	Conducted	0.301	24.78	1M09G7D	QPSK
			0.258	24.11	1M08W7D	16-QAM
			0.206	23.13	1M08W7D	64-QAM
			0.107	20.29	1M08W7D	256-QAM
	815.5 - 822.5		0.310	24.91	2M69G7D	QPSK
			0.259	24.14	2M69W7D	16-QAM
			0.205	23.12	2M69W7D	64-QAM
			0.106	20.25	2M69W7D	256-QAM
	816.5 - 821.5		0.297	24.73	4M54G7D	QPSK
			0.257	24.10	4M51W7D	16-QAM
			0.206	23.14	4M51W7D	64-QAM
			0.108	20.32	4M49W7D	256-QAM
	819		0.296	24.72	8M98G7D	QPSK
			0.256	24.09	8M99W7D	16-QAM
			0.205	23.11	8M98W7D	64-QAM
			0.105	20.22	8M98W7D	256-QAM
	821.5		0.309	24.90	13M5G7D	QPSK
			0.259	24.14	13M4W7D	16-QAM
			0.211	23.24	13M4W7D	64-QAM
			0.110	20.42	13M4W7D	256-QAM
821.5	ERP	0.121	20.83	13M5G7D	QPSK	
		0.102	20.08	13M4W7D	16-QAM	
		0.082	19.12	13M4W7D	64-QAM	
		0.045	16.52	13M4W7D	256-QAM	

EUT Overview

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 3 of 70	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISED.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 4 of 70	

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Samsung Portable Handset FCC ID: A3LSMG970U**. The test data contained in this report pertains only to the emissions due to the EUT's licensed transmitters that operate under the provisions of Part 90.543, 22(H) and 90.691.

Test Device Serial No.: 0358M, 0163M, 0388M, 0409M, 0161M, 0474M

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 CDMA/EvDO Rev0/A, 1x Advanced (BC0, BC1, BC10), 850/1900 GSM/GPRS/EDGE, 850/1700/1900 WCDMA/HSPA, Multi-band LTE, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC, ANT+, Wireless Power Transfer

This device uses a tuner circuit that dynamically updates the antenna impedance parameters to optimize antenna performance for certain bands and modes of operation. The tuner for this device was set to simulate a "free space" condition where the transmit antenna is matched to the medium into which it is transmitting and, thus, the power is at its maximum level.

2.3 Test Configuration

The EUT was tested per the guidance of ANSI/TIA-603-E-2016 and KDB 971168 D01 v03r01. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT placed on an authorized wireless charging pad (WCP) Model: EP-N5100 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 5 of 70	

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the document titled “Land Mobile FM or PM – Communications Equipment – Measurements and Performance Standards” (ANSI/TIA-603-E-2016) and “Procedures for Compliance Measurement of the Fundamental Emission Power of Licensed Wideband (> 1 MHz) Digital Transmission Systems” (KDB 971168 D01 v03r01) were used in the measurement of the EUT.

3.2 Radiated Power and Radiated Spurious Emissions

§2.1053, §90.635, §90.691, §90.543

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a wooden turntable 80cm above the ground plane and 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer. Radiated power levels are also investigated with the receive antenna horizontally and vertically polarized. The maximized power level is recorded using the spectrum analyzer “Channel Power” function with the integration band set to the emissions’ occupied bandwidth, a RMS detector, RBW = 100kHz, VBW = 300kHz, and a 1 second sweep time over a minimum of 10 sweeps, per the guidelines of KDB 971168 D01 v03r01.

Per the guidance of ANSI/TIA-603-E-2016, a half-wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]}$$

Where, P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

The calculated P_d levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of $43 + 10\log_{10}(\text{Power [Watts]})$ specified in 90.691.

For fundamental radiated power measurements, the guidance of KDB 971168 D01 v03r01 is used to record the EUT power level that is subsequently matched via the aforementioned substitution method given in ANSI/TIA-603-E-2016.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 6 of 70	

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 7 of 70	

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	LTx3	Licensed Transmitter Cable Set	8/23/2018	Annual	8/23/2019	LTx3
Agilent	E5515C	Wireless Communications Test Set	1/29/2016	Triennial	1/29/2019	GB46310798
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	E5515C	Wireless Communications Test Set	3/4/2016	Triennial	3/4/2019	GB45360985
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2017	Biennial	10/10/2019	121034
Com-Power	PAM-103	Pre-Amplifier (1-1000MHz)	9/17/2018	Annual	9/17/2019	441119
Espec	ESX-2CA	Environmental Chamber	3/28/2018	Annual	3/28/2019	17620
ETS Lindgren	3164-08	Quad Ridge Horn Antenna	3/28/2018	Biennial	3/28/2020	128337
Mini Circuits	TVA-11-422	RF Power Amp	N/A		N/A	QA1317001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11208010032
Mini-Circuits	PWR-SEN-4RMS	USB Power Sensor	3/30/2018	Annual	3/30/2019	11210140001
Mini-Circuits	SSG-4000HP	Synthesized Signal Generator	N/A			11403100002
Rohde & Schwarz	CMU200	Base Station Simulator	5/18/2018	Annual	5/18/2019	109892
Rohde & Schwarz	CMW500	Radio Communication Tester	6/8/2018	Annual	6/8/2019	112347
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	1/24/2018	Annual	1/24/2019	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	5/21/2018	Annual	5/21/2019	100342
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	8/9/2018	Annual	8/9/2019	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	6/18/2018	Annual	6/18/2019	102134
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Rx	4/30/2018	Biennial	4/30/2020	9105-2404
Schwarzbeck	UHA 9105	Dipole Antenna (400 - 1GHz) Tx	4/30/2018	Biennial	4/30/2020	9105-2403
Seekonk	NC-100	Torque Wrench (8" lb)	5/10/2018	Biennial	5/10/2020	N/A
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	4/19/2018	Biennial	4/19/2020	A051107
Sunol	DRH-118	Horn Antenna (1-18 GHz)	8/11/2017	Biennial	8/11/2019	A042511

Table 5-1. Test Equipment

Notes:

1. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 8 of 70	

6.0 SAMPLE CALCULATIONS

Emission Designator

Emission Designator = 1M25F9W

CDMA BW = 1.25 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data) (Measured at the 99.75% power bandwidth)

Spurious Radiated Emission – BC10

Example: Channel 476 CDMA BC10 Mode 3rd Harmonic (2453.70MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 2453.70 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80) = 50.3 dBc.

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (1564 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was –81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of –81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of –30.9 dBm yielding –24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 9 of 70	

7.0 TEST RESULTS

7.1 Summary

Company Name: Samsung Electronics Co., Ltd.
 FCC ID: A3LSMG970U
 FCC Classification: PCS Licensed Transmitter Held to Ear (PCE)
 Mode(s): CDMA / EvDO / LTE
 Band: Band Class 10 / Band 26 / Band 14

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
2.1049	Occupied Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
2.1051 90.691 90.543	Conducted Band Edge / Spurious Emissions	On all frequencies between 769-775 MHz and 799-805 MHz, attenuation by a factor not less than $65 + 10\log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations. (LTE B14) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, attenuation by at least $43 + 10\log(P)$ dB. (LTE B14) > $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge (CDMA BC10, LTE B26)		PASS	Sections 7.3, 7.4
2.1055 90.213	Frequency Stability	< 2.5 ppm		PASS	Section 7.8
2.1046 90.635	Conducted Power	< 100 Watts		PASS	Section 7.5
22.913(a.2)	Effective Radiated Power (Band 26)	< 7 Watts max. ERP	RADIATED	PASS	Section 7.6
90.542	Effective Radiated Power (Band 14)	< 3 Watts max. ERP		PASS	Section 7.6
2.1053 90.691 90.543	Radiated Spurious Emissions	> $43 + 10\log_{10}(P[\text{Watts}])$ for all out-of-band emissions except > $50 + 10\log_{10}(P[\text{Watts}])$ at Band Edge and for all out-of-band emissions within 37.5kHz of Block Edge		PASS	Section 7.7

Table 7-1. Summary of Test Results

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 10 of 70	

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in Section 7.0 were taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "2G/3G Automation," Version 3.11.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 11 of 70	

7.2 Occupied Bandwidth

§2.1049

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 4.2

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.


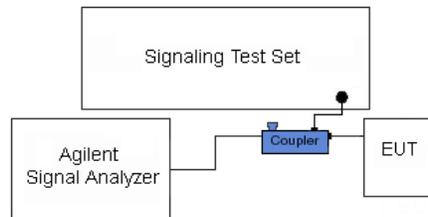


Figure 7-1. Test Instrument & Measurement Setup


Test Notes

None.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 12 of 70

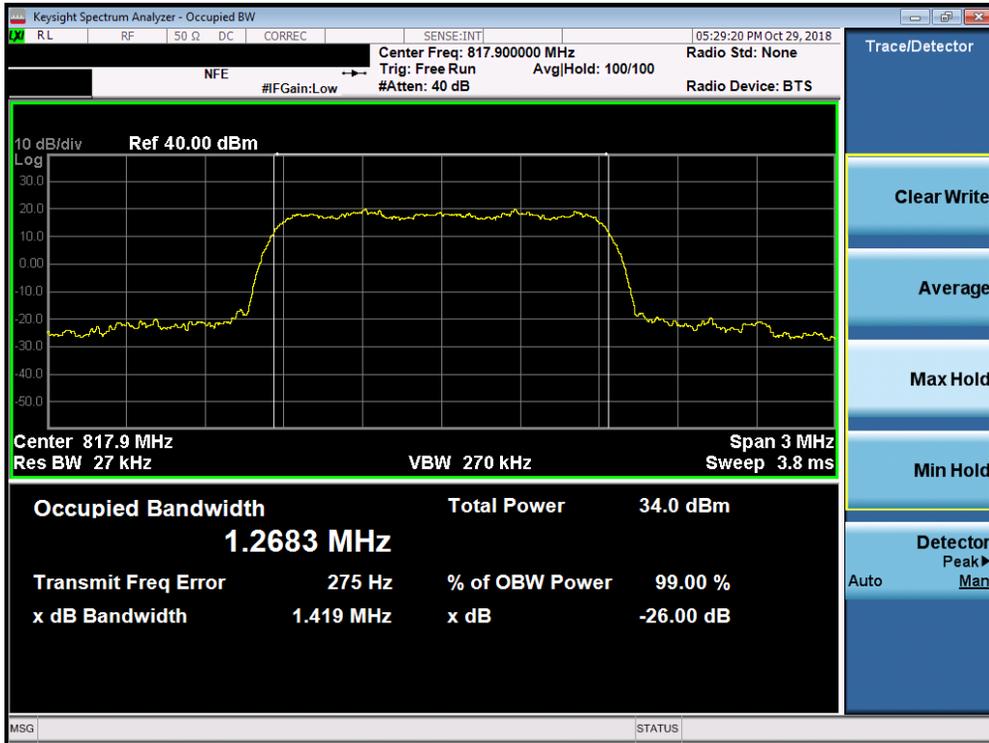


Plot 7-1. Occupied Bandwidth Plot (CDMA BC10 - Ch. 476)

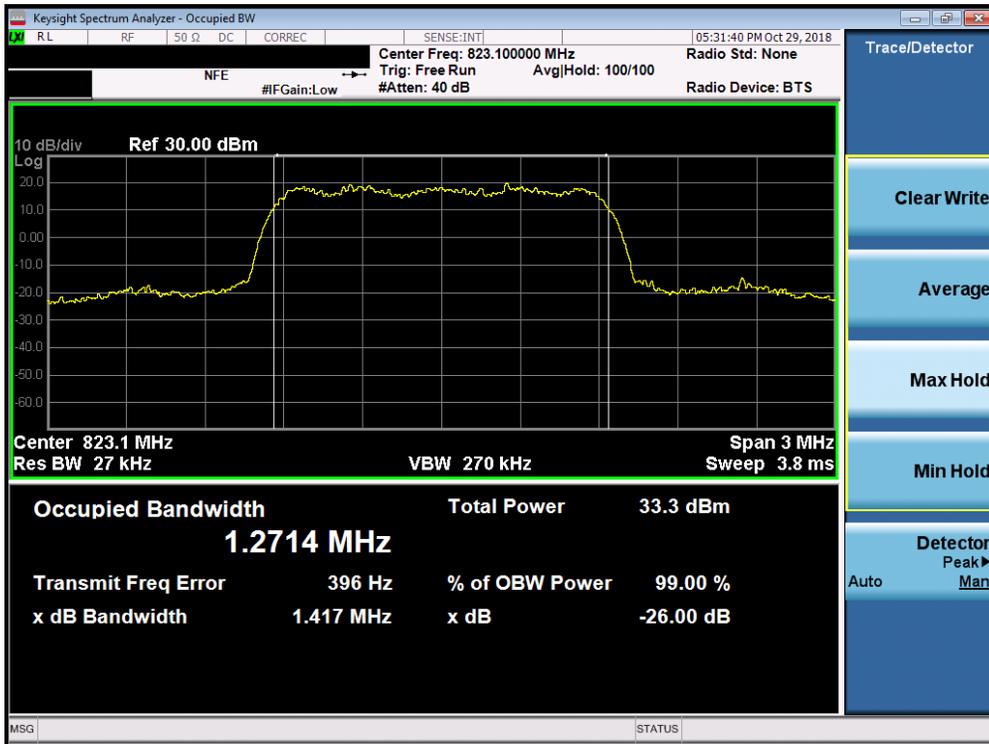


Plot 7-2. Occupied Bandwidth Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 13 of 70

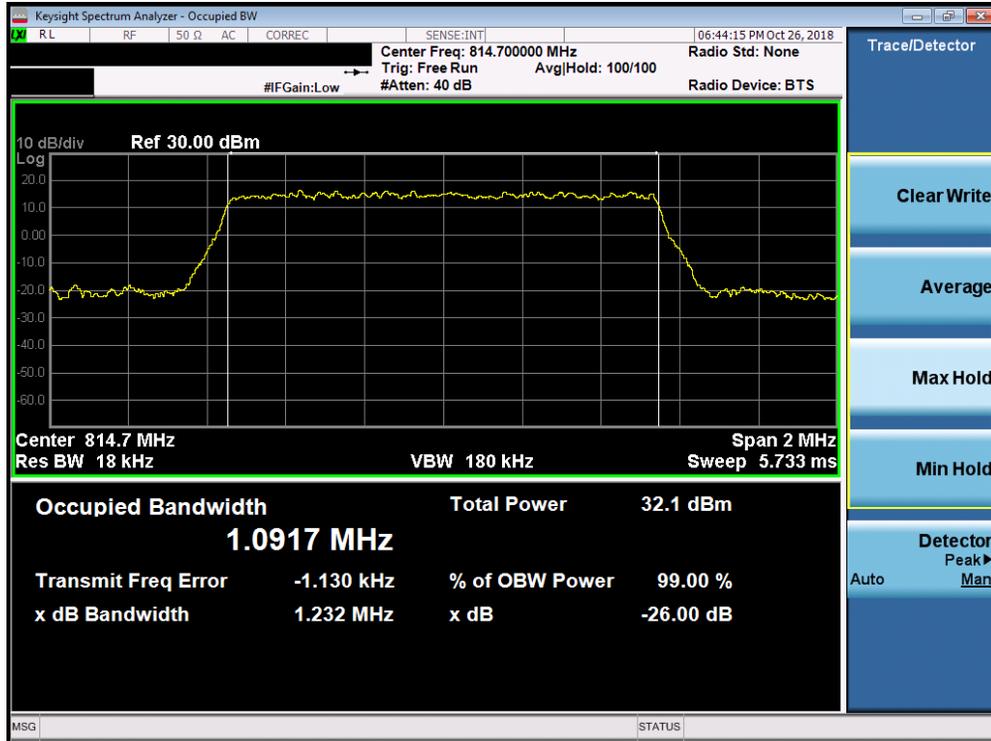


Plot 7-3. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– Low Channel)

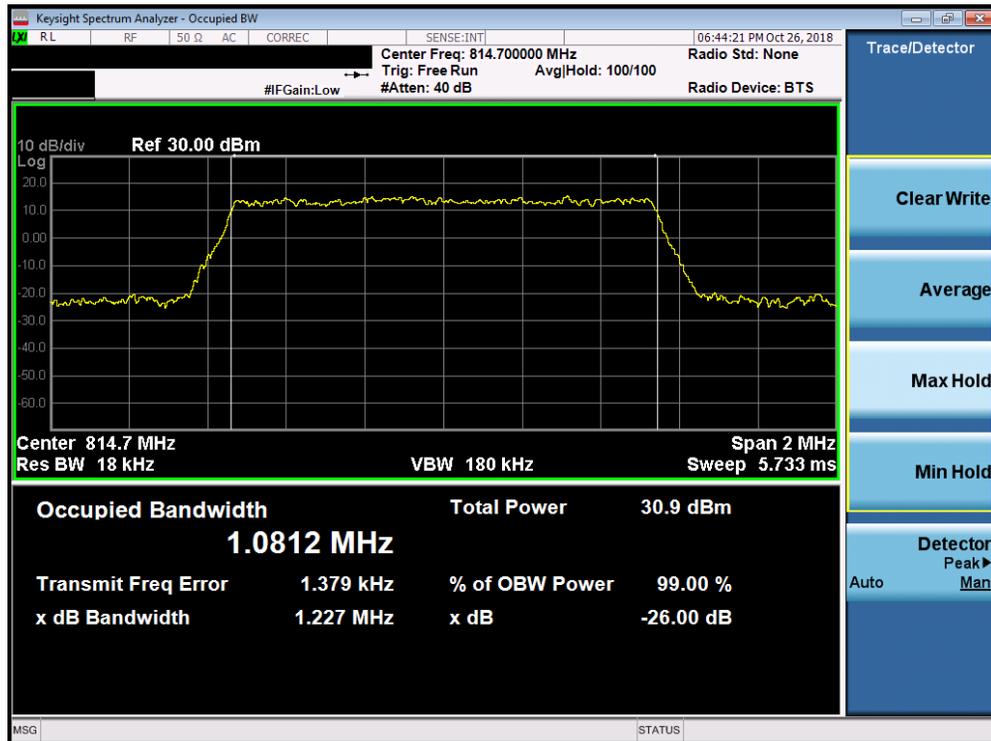


Plot 7-4. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 16-QAM – RB Size 6– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 14 of 70

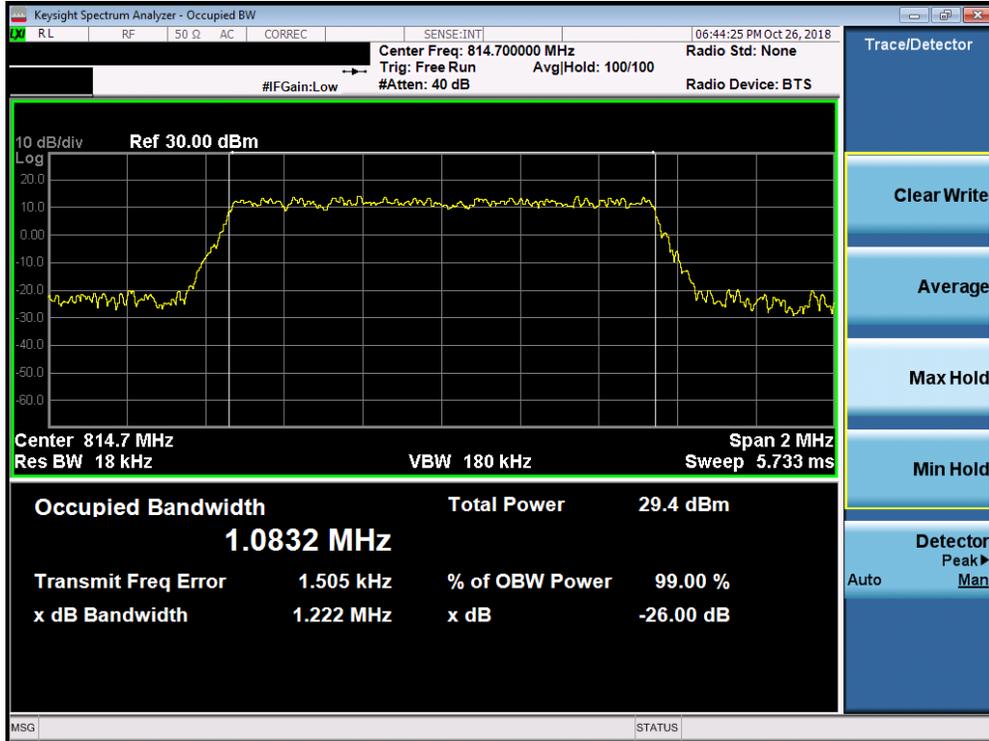


Plot 7-5. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 64-QAM – RB Size 6– Low Channel)

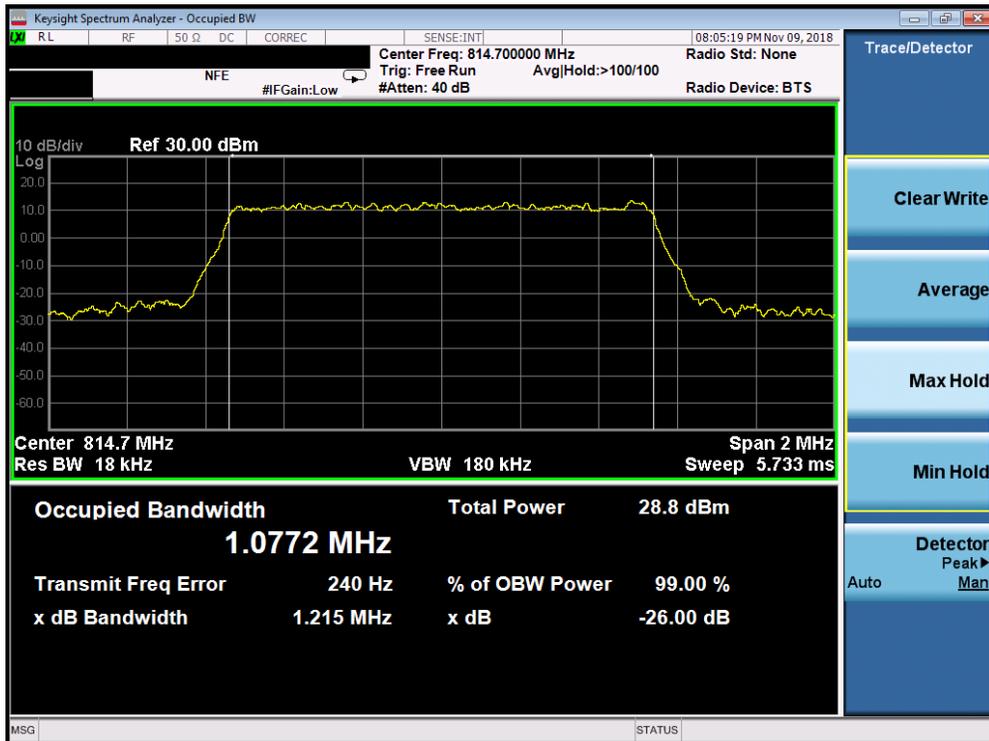


Plot 7-6. Occupied Bandwidth Plot (LTE Band 26, 1.4MHz 256-QAM – RB Size 6– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 15 of 70

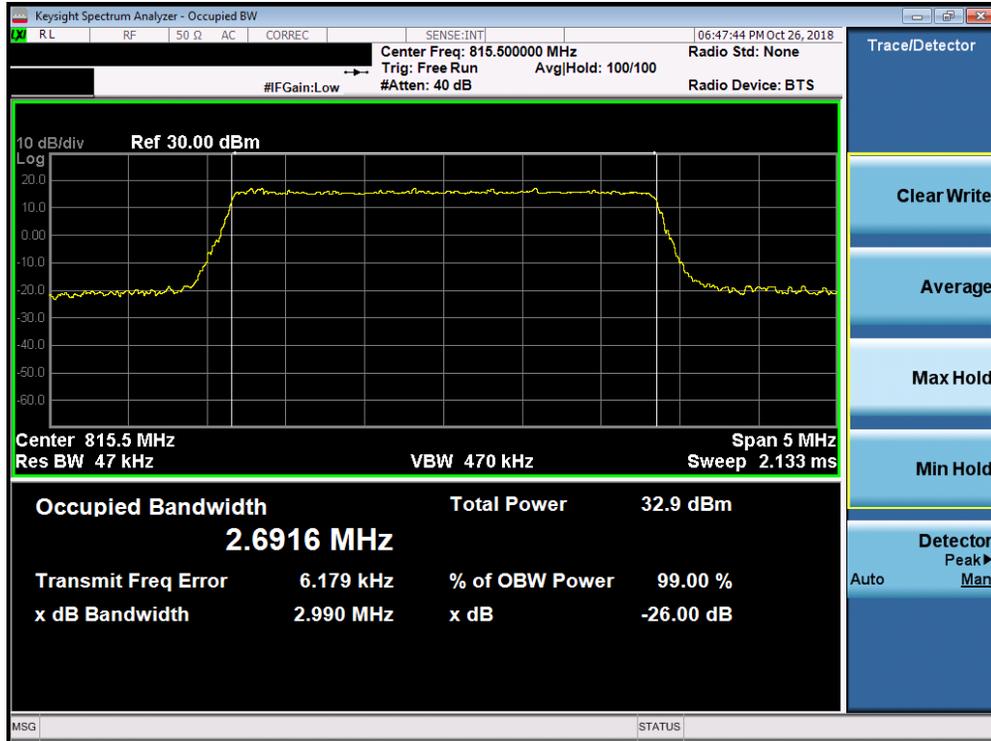


Plot 7-7. Occupied Bandwidth Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

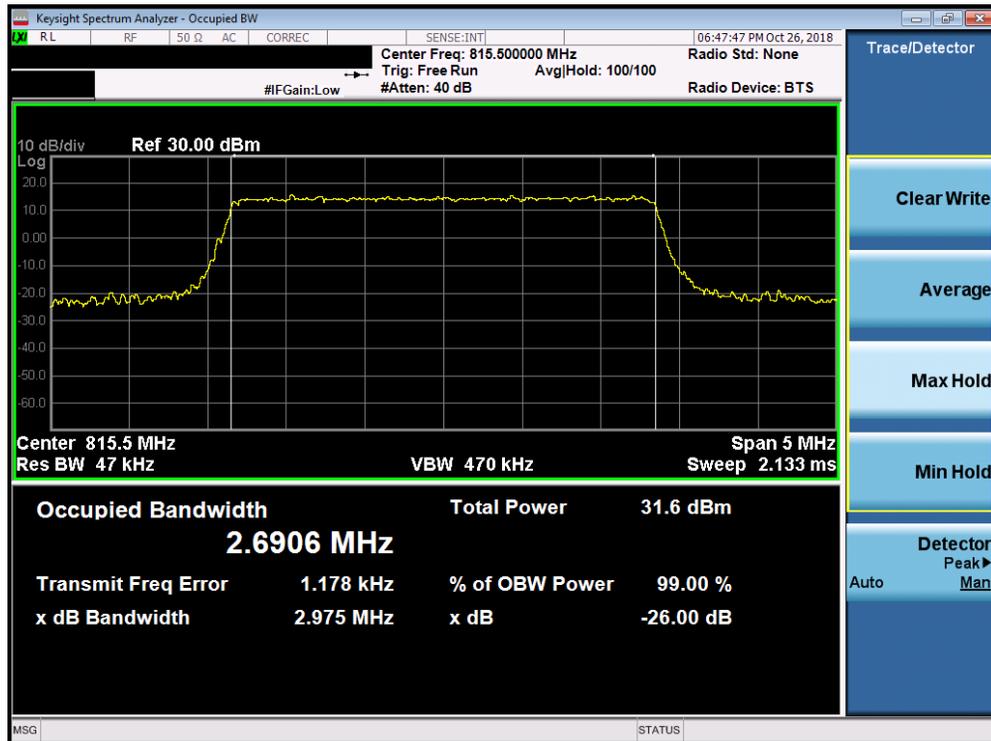


Plot 7-8. Occupied Bandwidth Plot (LTE Band 26, 3MHz 16-QAM – RB Size 15– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 16 of 70

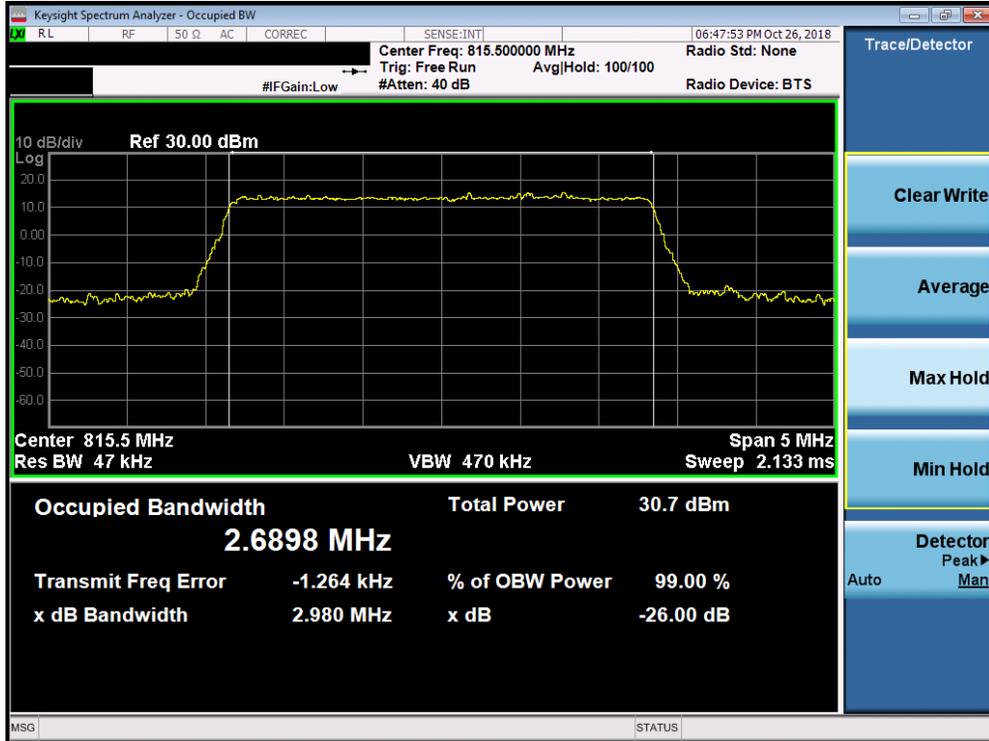


Plot 7-9. Occupied Bandwidth Plot (LTE Band 26, 3MHz 64-QAM – RB Size 15– Low Channel)

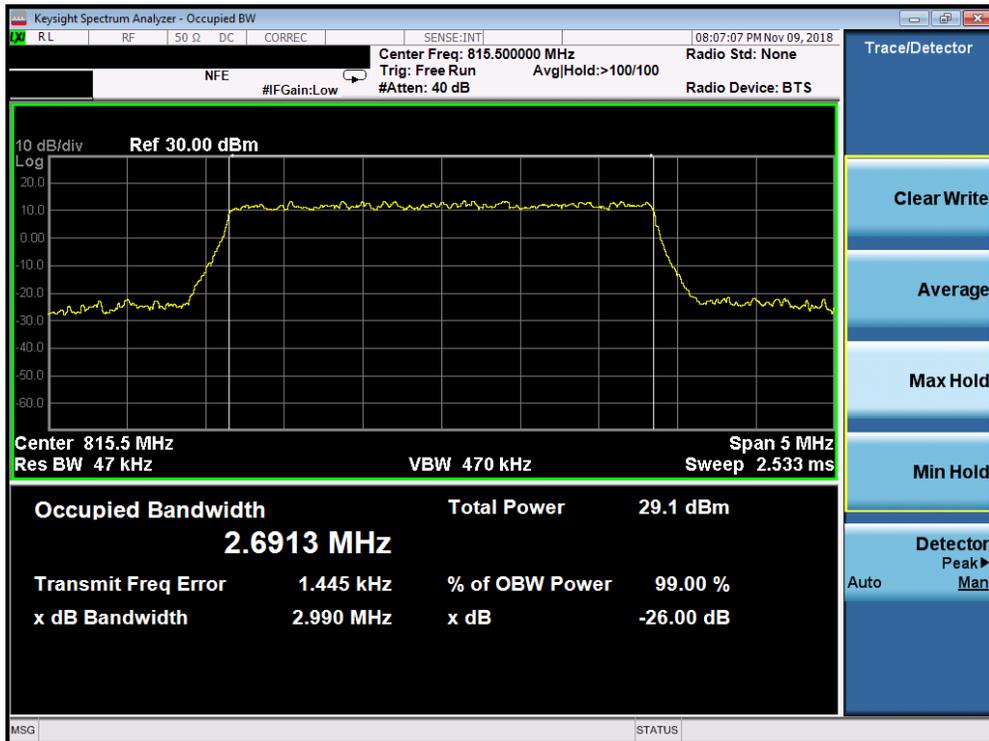


Plot 7-10. Occupied Bandwidth Plot (LTE Band 26, 3MHz 256-QAM – RB Size 15– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 17 of 70

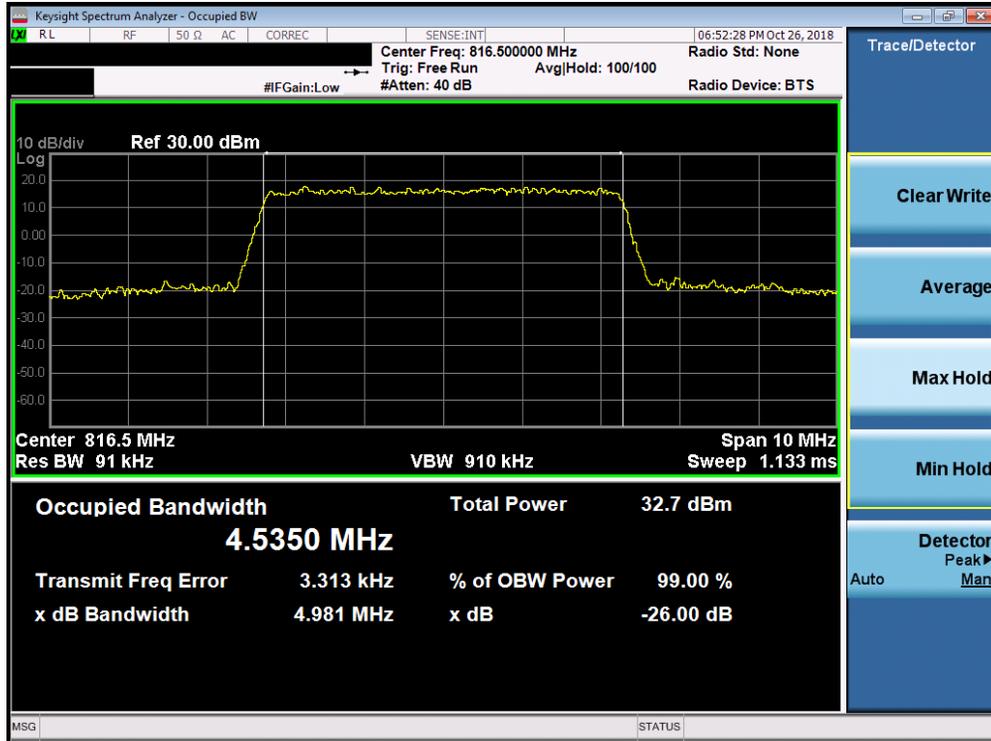


Plot 7-11. Occupied Bandwidth Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

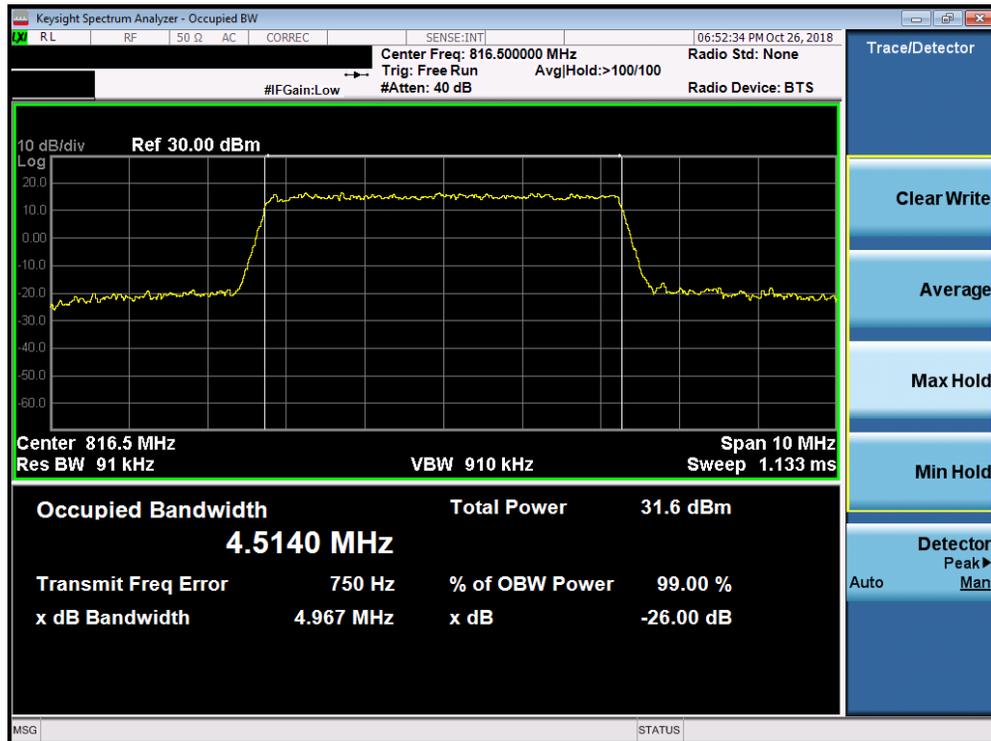


Plot 7-12. Occupied Bandwidth Plot (LTE Band 26, 5MHz 16-QAM – RB Size 25– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 18 of 70

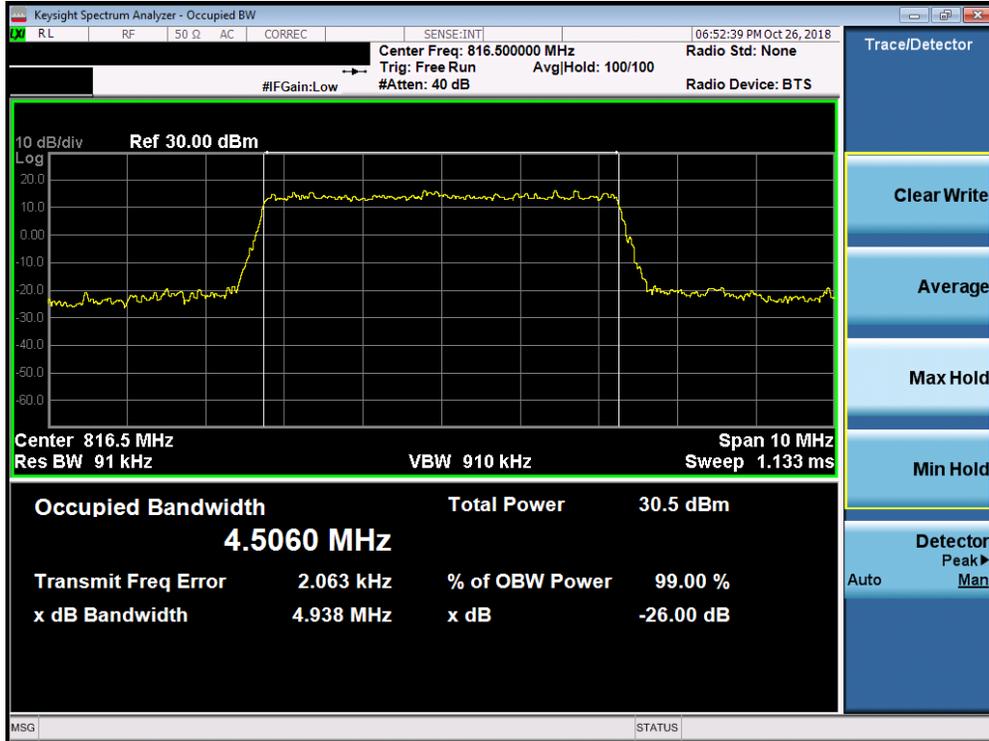


Plot 7-13. Occupied Bandwidth Plot (LTE Band 26, 5MHz 64-QAM – RB Size 25– Low Channel)

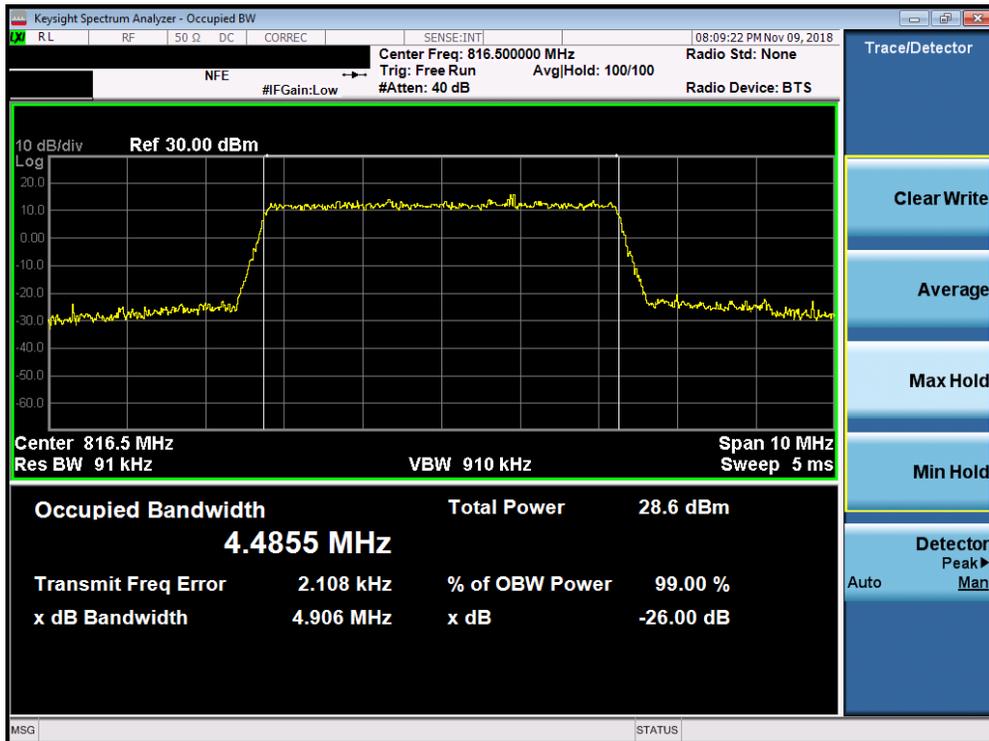


Plot 7-14. Occupied Bandwidth Plot (LTE Band 26, 5MHz 256-QAM – RB Size 25– Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 19 of 70

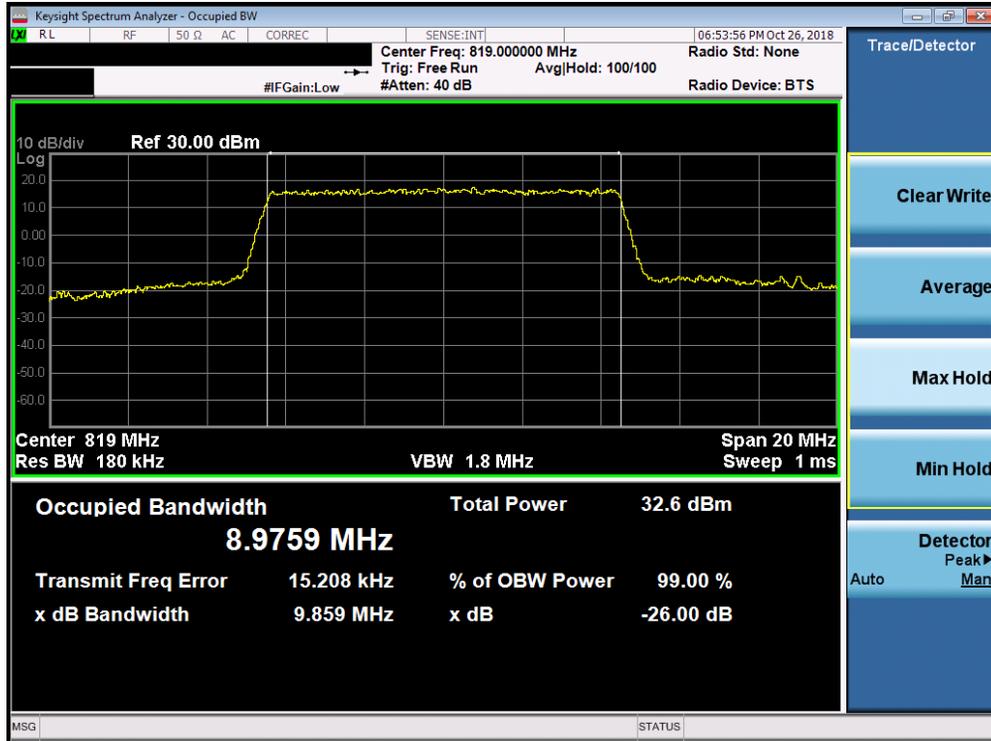


Plot 7-15. Occupied Bandwidth Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

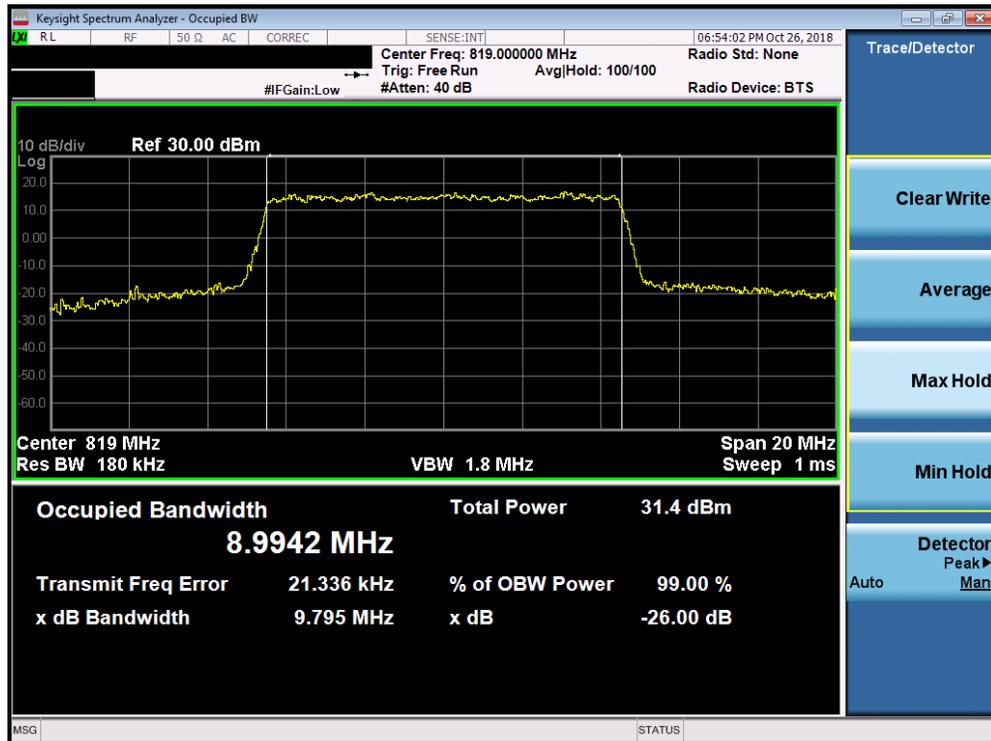


Plot 7-16. Occupied Bandwidth Plot (LTE Band 26, 10MHz 16-QAM – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 20 of 70

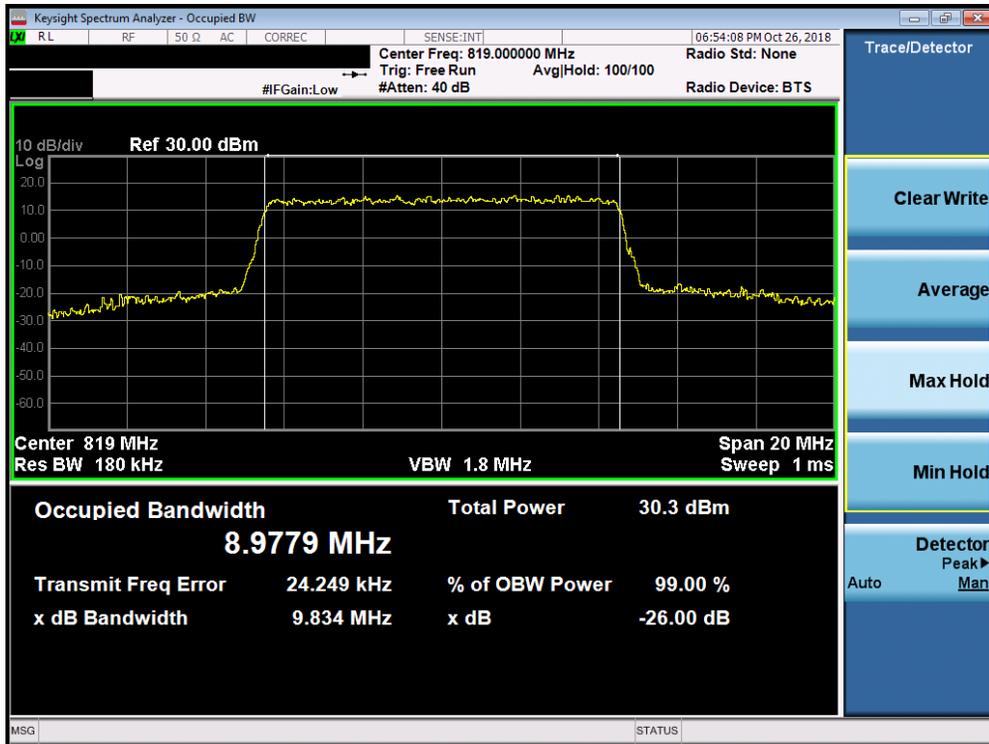


Plot 7-17. Occupied Bandwidth Plot (LTE Band 26, 10MHz 64-QAM – RB Size 50)

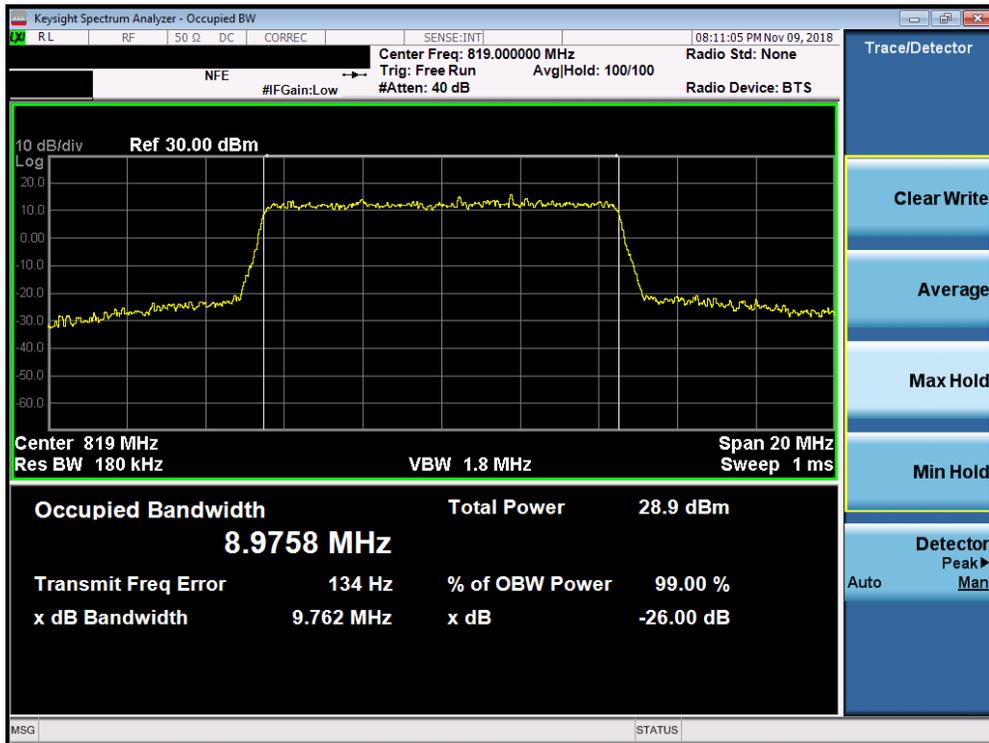


Plot 7-18. Occupied Bandwidth Plot (LTE Band 26, 10MHz 256-QAM – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 21 of 70

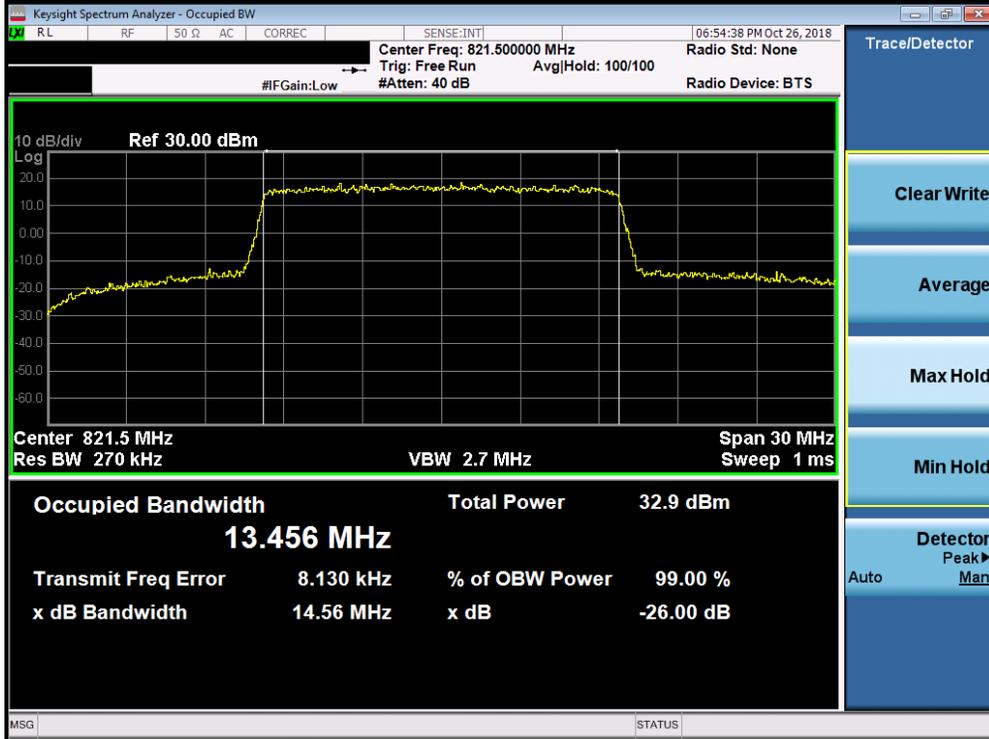


Plot 7-19. Occupied Bandwidth Plot (LTE Band 26, 15MHz QPSK – RB Size 75)

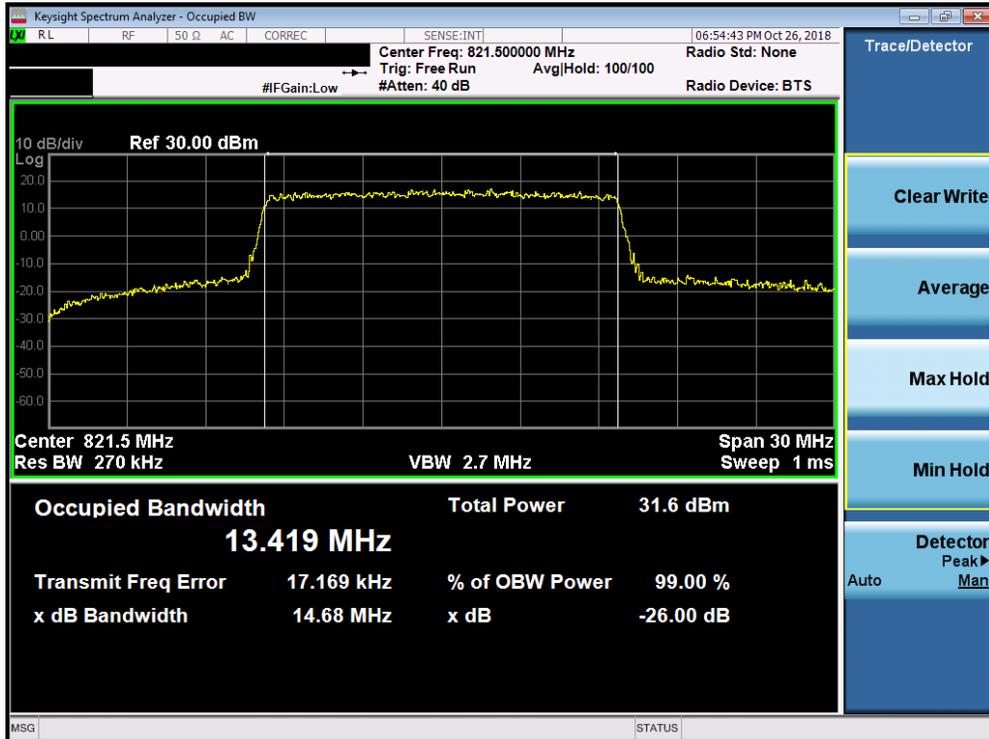


Plot 7-20. Occupied Bandwidth Plot (LTE Band 26, 15MHz 16-QAM – RB Size 75)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 22 of 70

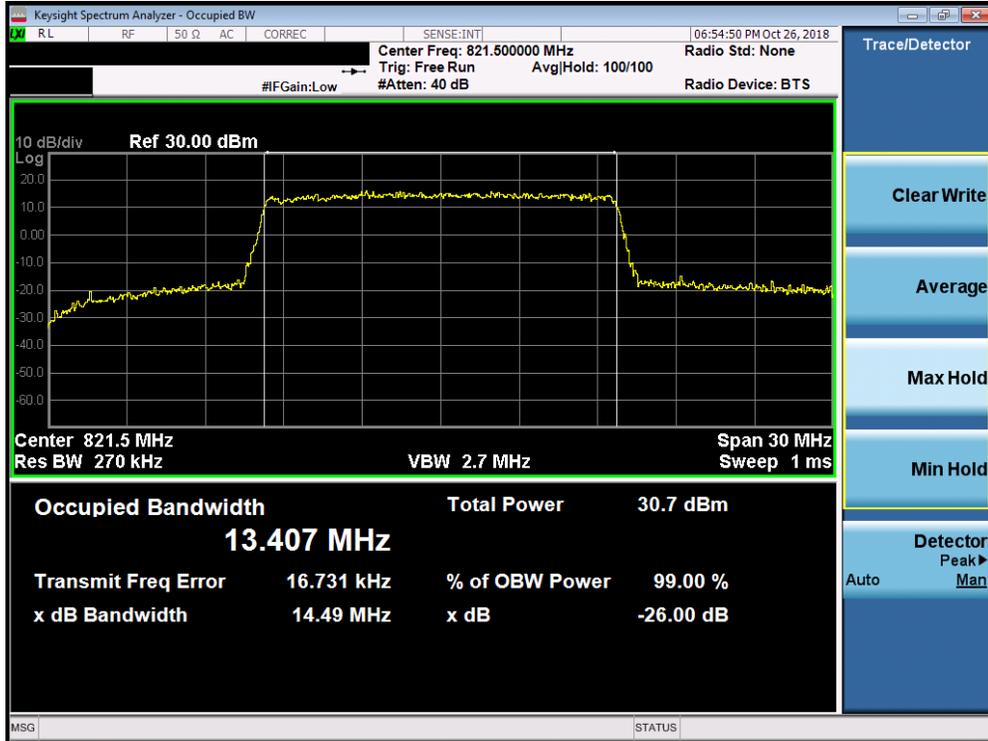


Plot 7-21. Occupied Bandwidth Plot (LTE Band 26, 15MHz 64-QAM – RB Size 75)

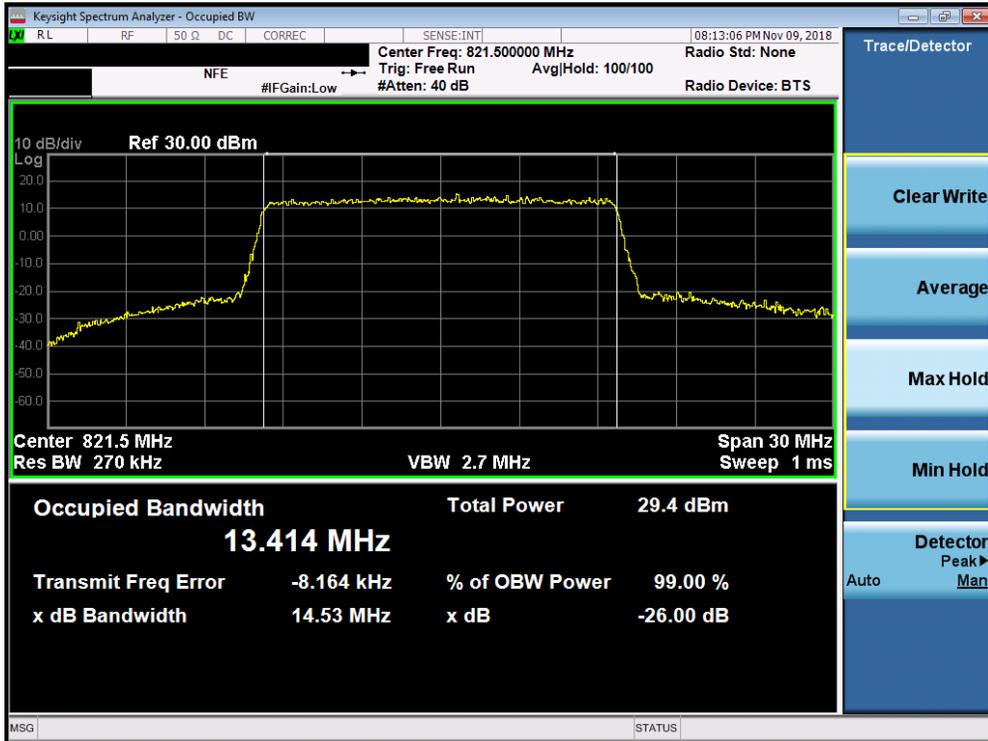


Plot 7-22. Occupied Bandwidth Plot (LTE Band 26, 15MHz 256-QAM – RB Size 75)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 23 of 70

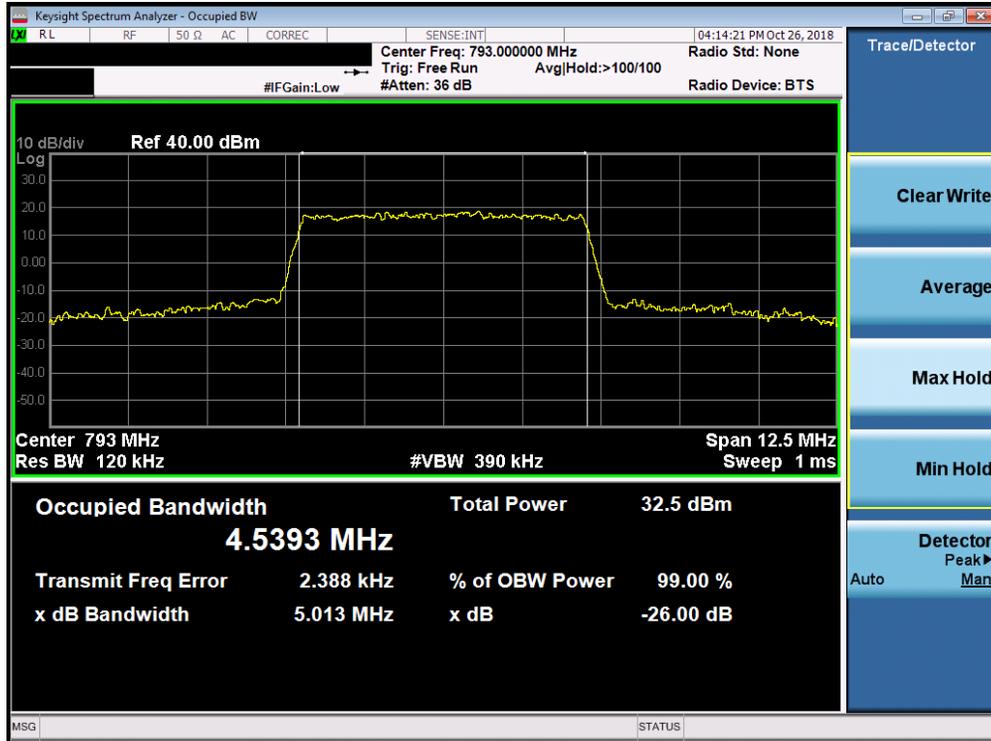


Plot 7-23. Occupied Bandwidth Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

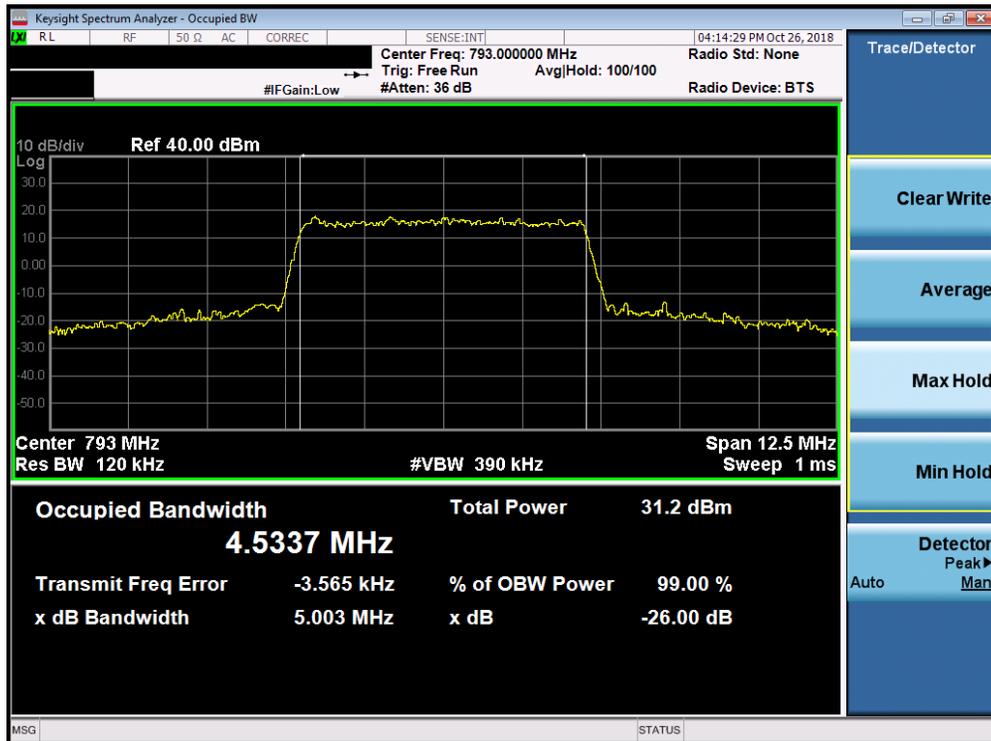


Plot 7-24. Occupied Bandwidth Plot (LTE Band 14, 5MHz 16-QAM – RB Size 25)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 24 of 70

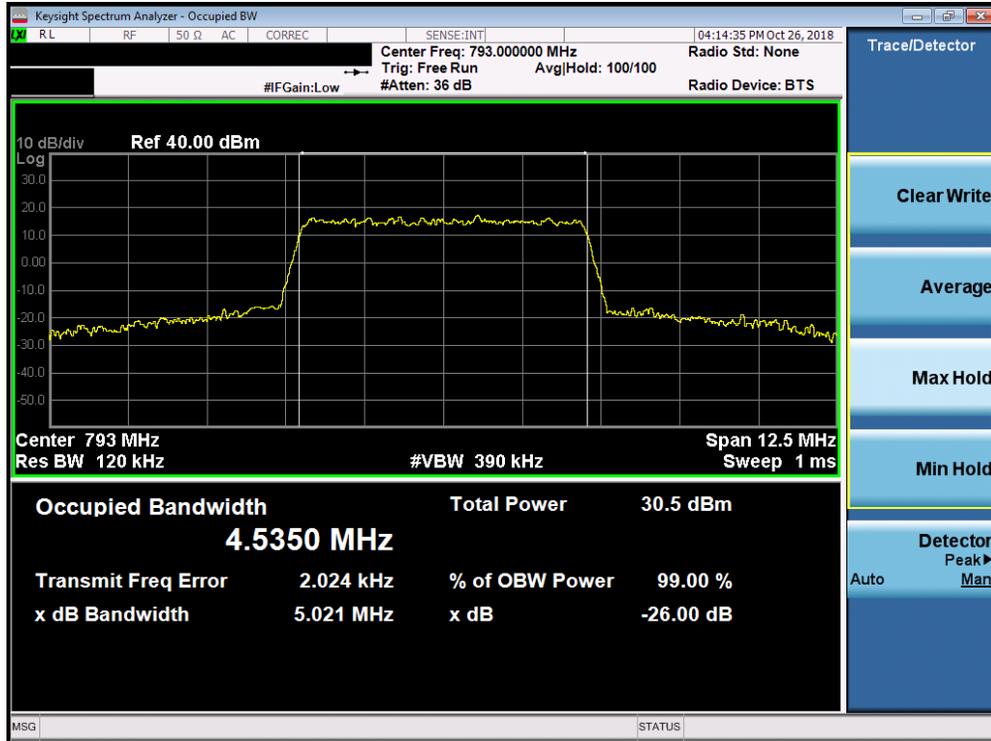

Plot 7-25. Occupied Bandwidth Plot (LTE Band 14, 5MHz 64-QAM – RB Size 25)

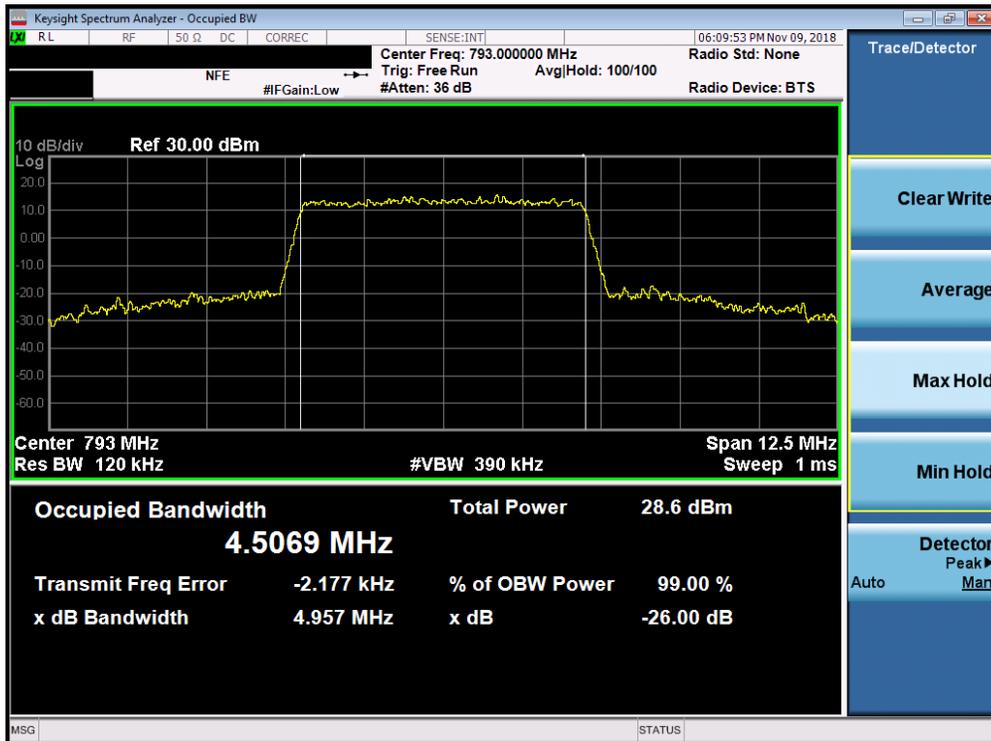


Plot 7-26. Occupied Bandwidth Plot (LTE Band 14, 5MHz 256-QAM – RB Size 25)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 25 of 70




Plot 7-27. Occupied Bandwidth Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

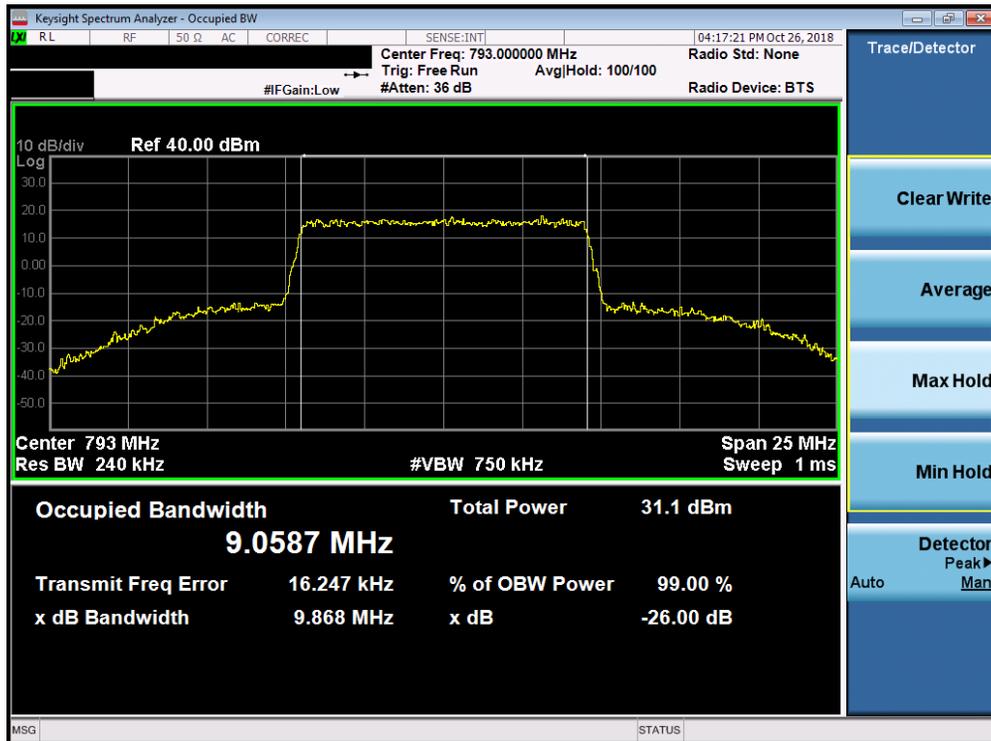

Plot 7-28. Occupied Bandwidth Plot (LTE Band 14, 10MHz 16-QAM – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 26 of 70

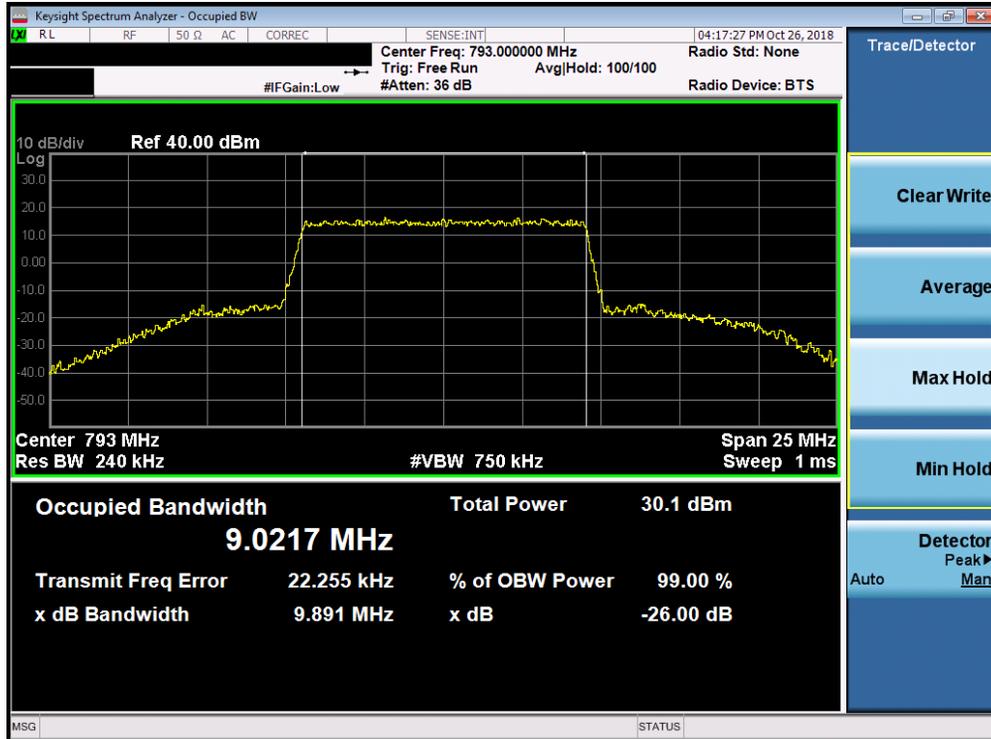

Plot 7-29. Occupied Bandwidth Plot (LTE Band 14, 10MHz 64-QAM – RB Size 50)



Plot 7-30. Occupied Bandwidth Plot (LTE Band 14, 10MHz 256-QAM – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 27 of 70

7.3 Spurious and Harmonic Emissions at Antenna Terminal

§2.1051 §90.691 §90.543

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

The minimum permissible attenuation level of any spurious emission is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to 10GHz (separated into at least two plots per channel)
2. RBW \geq 100KHz
3. VBW \geq 3 x RBW
4. Detector = RMS
5. Trace mode = trace averaging (RMS)
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

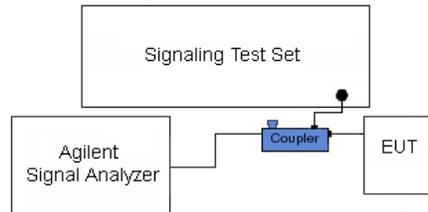



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater for Part 22. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 28 of 70	

CDMA BC10

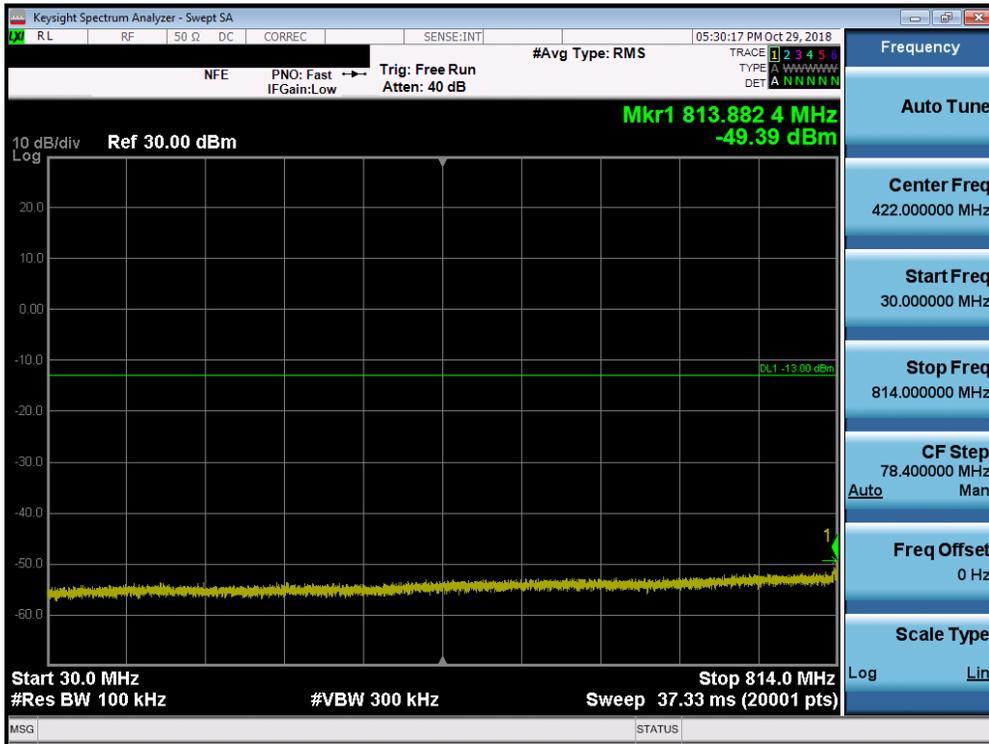


Plot 7-31. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

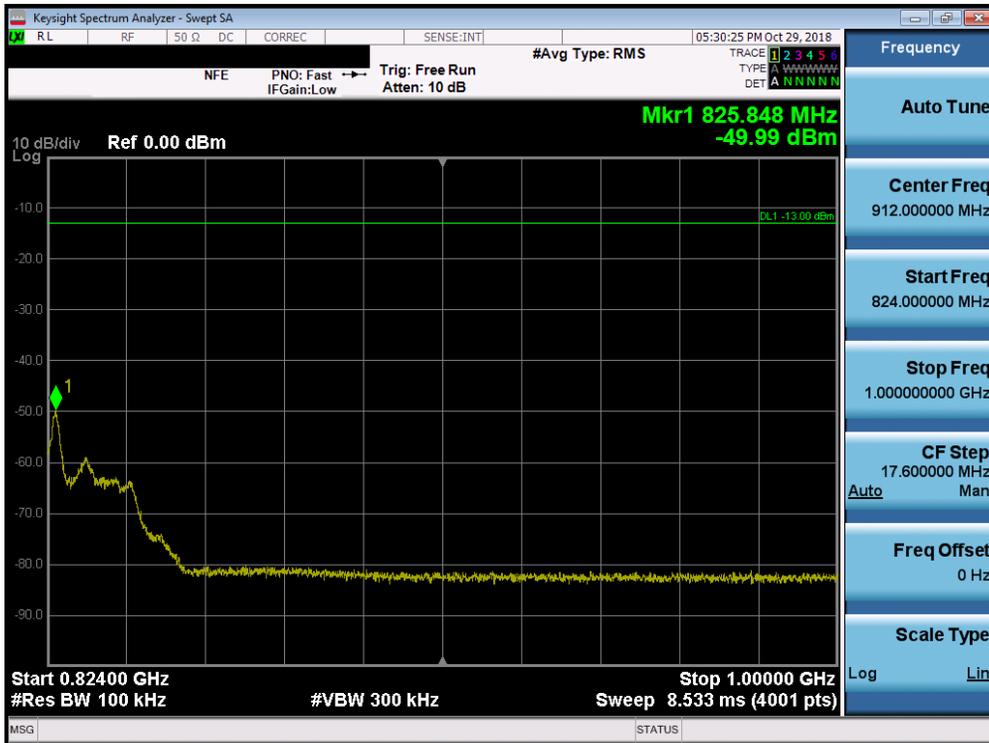


Plot 7-32. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 29 of 70

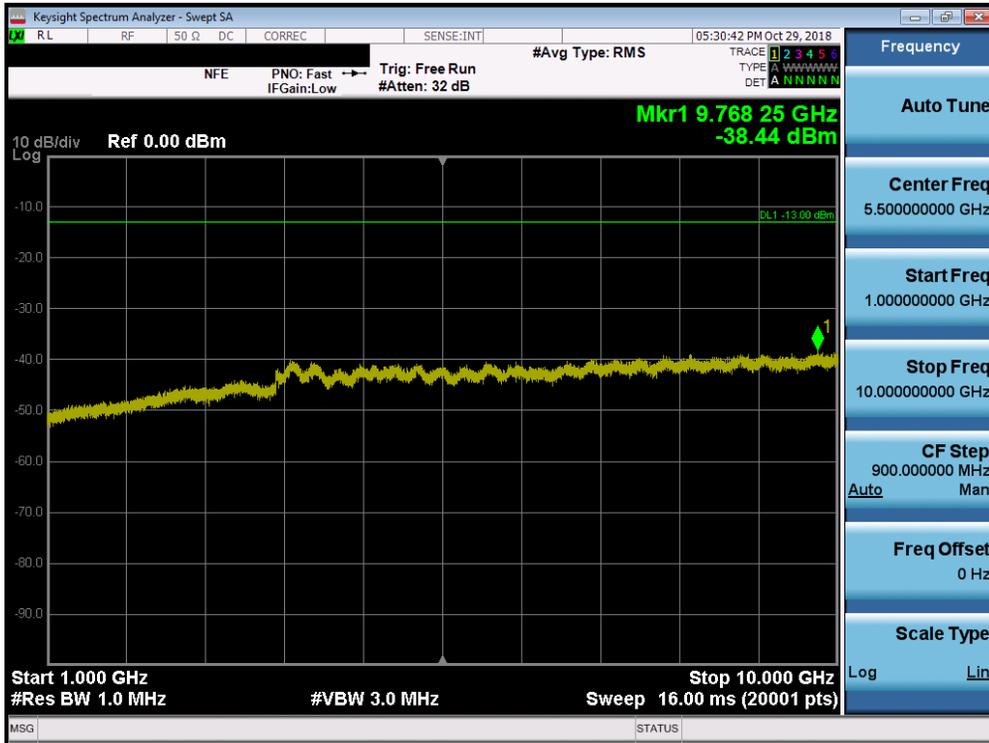


Plot 7-33. Conducted Spurious Plot (CDMA BC10 - Ch. 476)

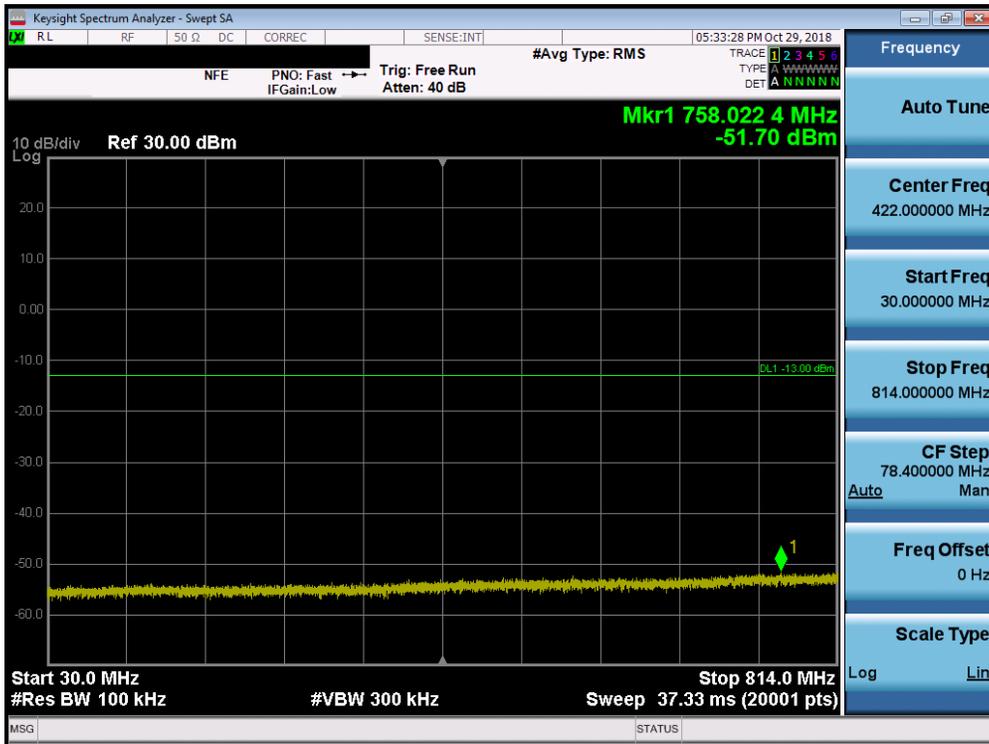


Plot 7-34. Conducted Spurious Plot (CDMA BC10 - Ch. 684)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 30 of 70

LTE Band 26

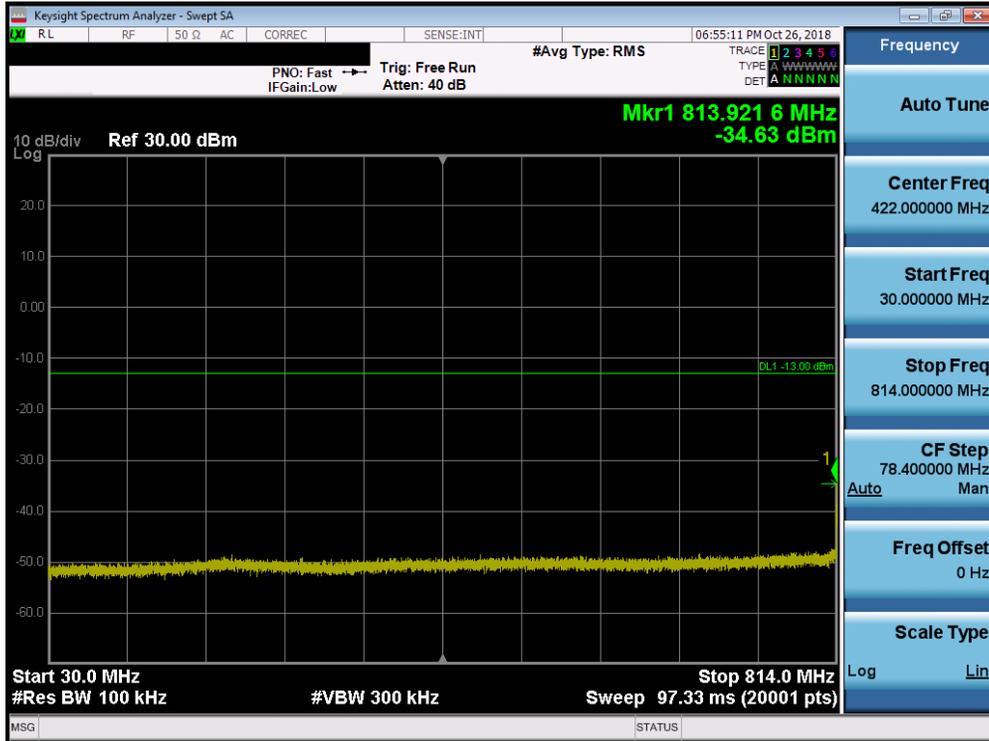


Plot 7-37. Conducted Spurious Plot (LTE Band 26, 15MHz QPSK – RB Size 1, RB Offset 0)

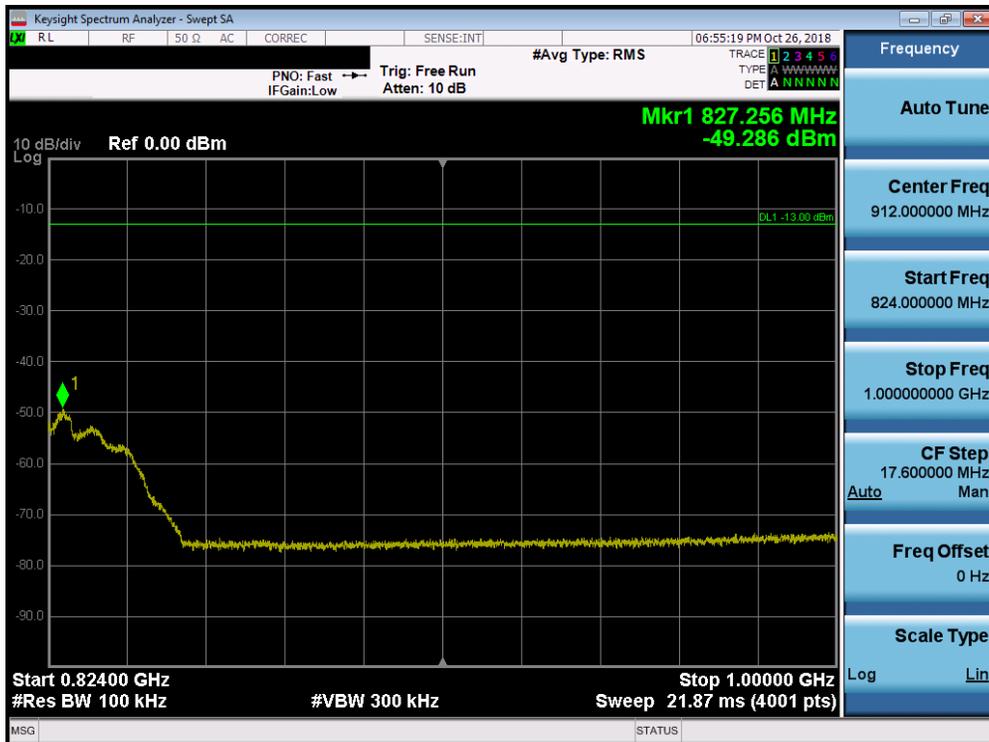

Plot 7-38. Conducted Spurious Plot (LTE Band 26, 15MHz QPSK – RB Size 1, RB Offset 0)


FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 32 of 70

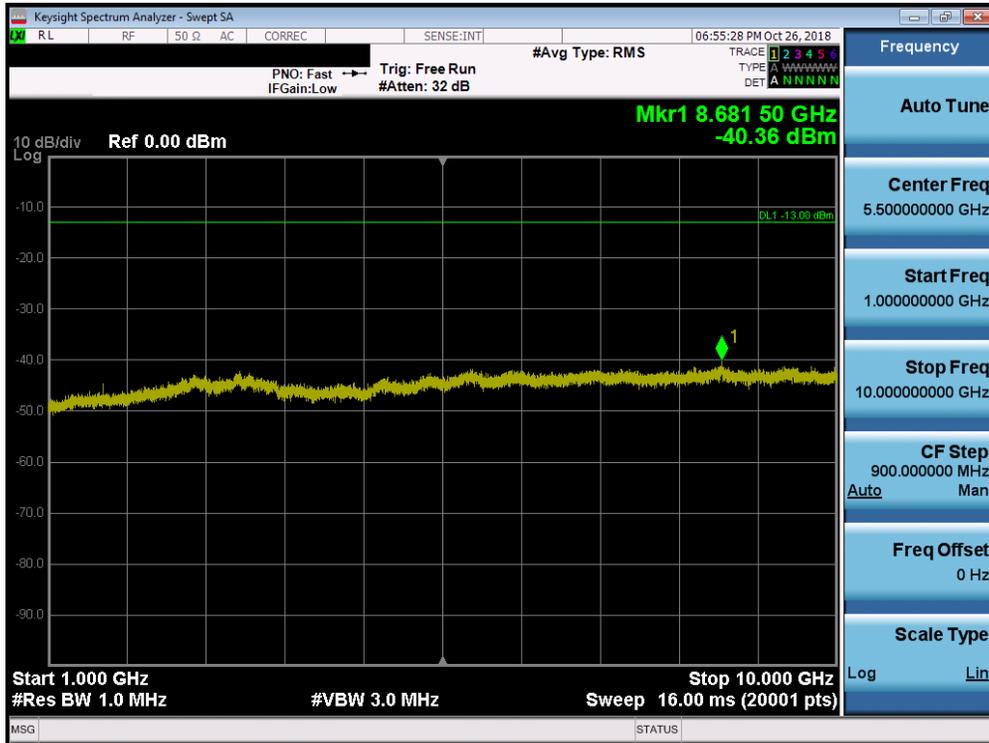


Plot 7-39. Conducted Spurious Plot (LTE Band 26, 15MHz QPSK – RB Size 1, RB Offset 0)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 33 of 70

LTE Band 14

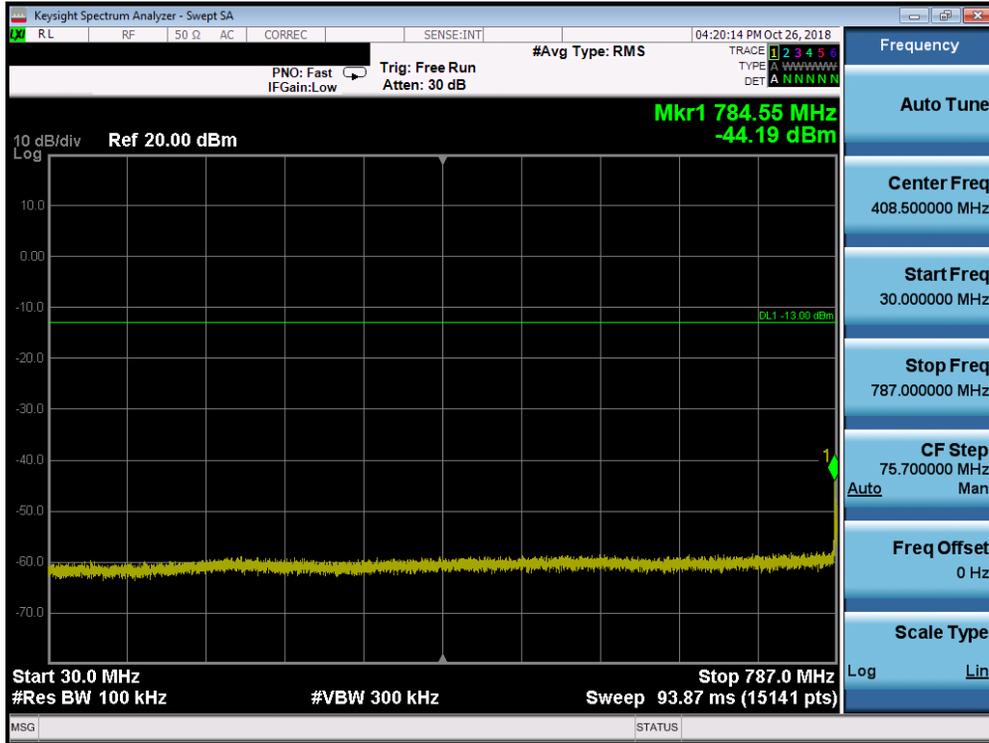


Plot 7-40. Conducted Spurious Plot (LTE Band 14, 5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

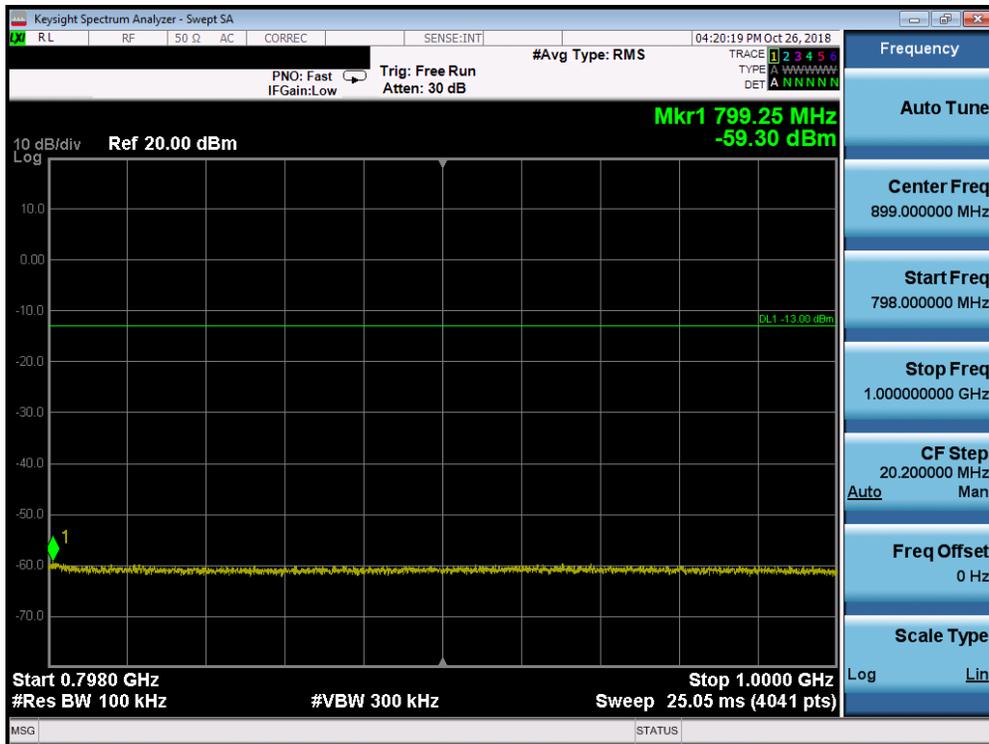


Plot 7-41. Conducted Spurious Plot (LTE Band 14, 5MHz QPSK – RB Size 1, RB Offset 0 – Low Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 34 of 70

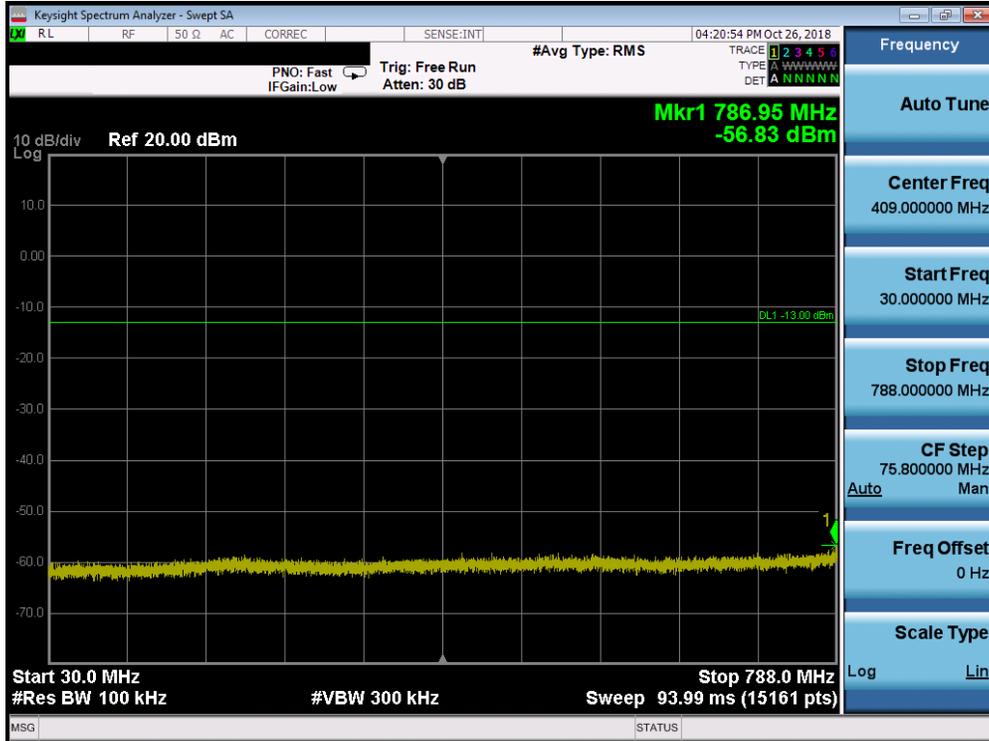


Plot 7-46. Conducted Spurious Plot (LTE Band 14, 5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

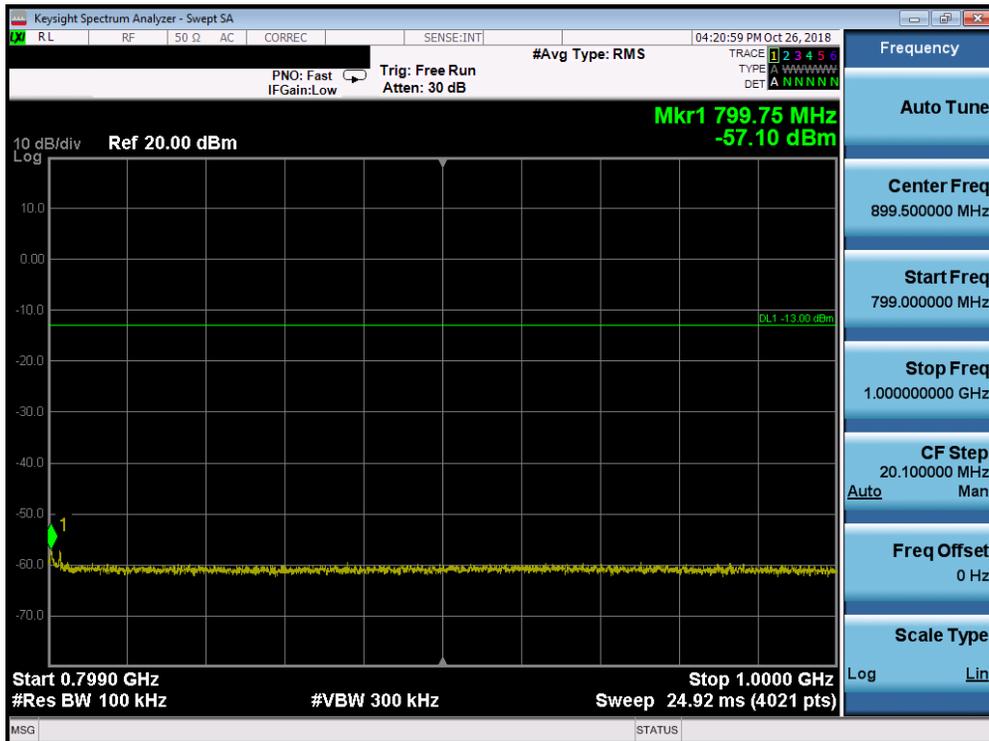

Plot 7-47. Conducted Spurious Plot (LTE Band 14, 5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 37 of 70

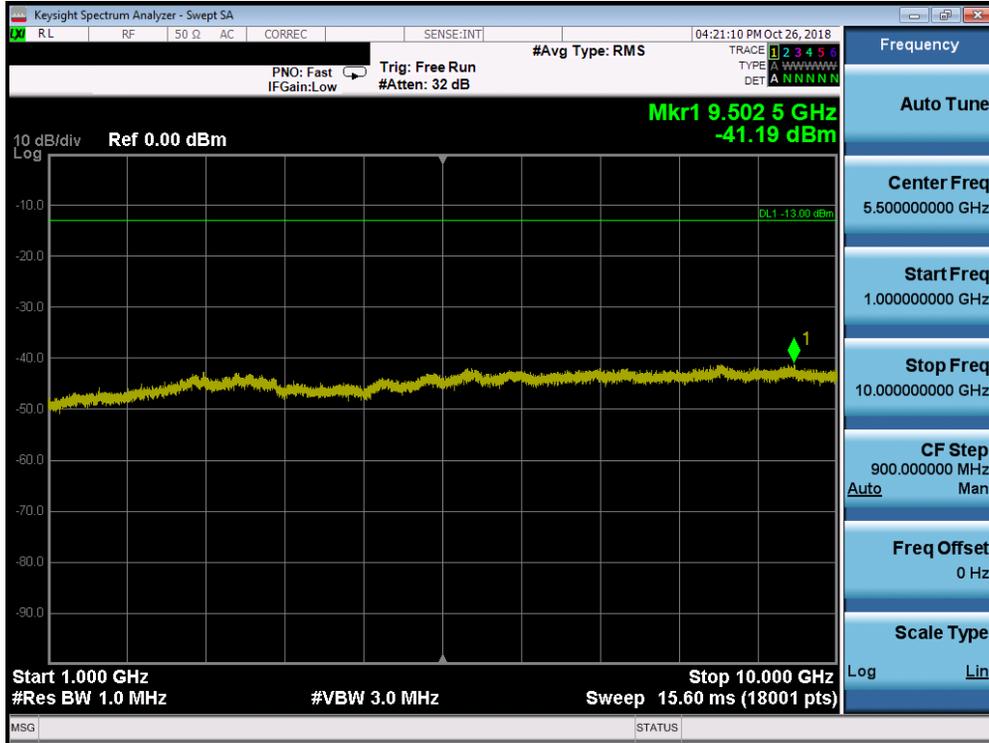

Plot 7-48. Conducted Spurious Plot (LTE Band 14, 5MHz QPSK – RB Size 1, RB Offset 0 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 38 of 70

7.4 Band Edge Emissions at Antenna Terminal

§2.1051 §90.691 §90.543

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

For LTE B26 operation under Part 90.691, the minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by greater than 37.5 kHz is $43 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts. The minimum permissible attenuation level of any spurious emission removed from the EA licensee’s frequency block by up to and including 37.5 kHz is $50 + 10\log_{10}(P_{[Watts]})$, where P is the transmitter power in Watts.

For LTE Band 14 operation under Part 90.543, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10\log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.

Additionally, for LTE Band 14 operation, on all frequencies between 769-775 MHz and 799-805 MHz, the power of any emission shall be attenuated by a factor not less than $65 + 10 \log(P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.

Test Procedure Used

KDB 971168 D01 v03r01 – Section 6.0

Test Settings

1. Span was set large enough so as to capture all out of band emissions near the band edge
2. RBW = 100 kHz
3. VBW = 300 kHz
4. Detector = RMS
5. Trace mode = trace average
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

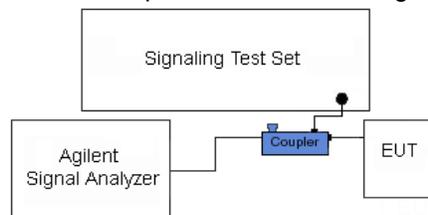


Figure 7-3. Test Instrument & Measurement Setup


FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 39 of 70

Test Notes

1. For channel edge emission, the signal analyzer's "ACP" measurement capability is used.
2. Per 22.917(b) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 40 of 70	

CDMA BC10

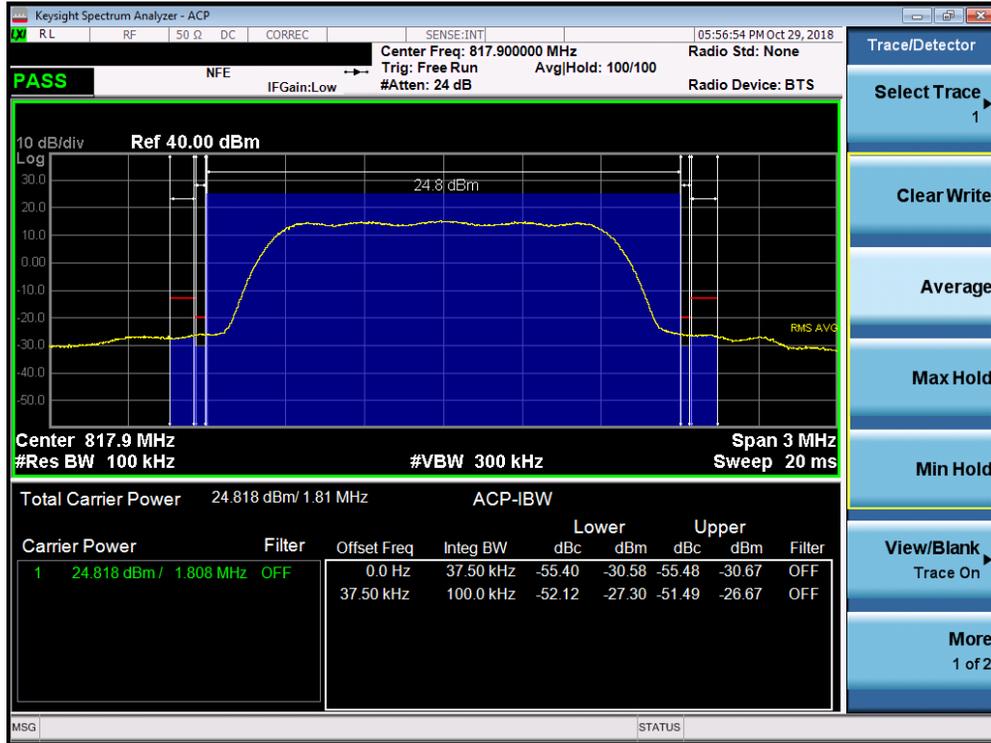


Plot 7-49. Channel Edge Plot (Ch. 476)



Plot 7-50. Channel Edge Plot (Ch. 684)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 41 of 70

LTE Band 26

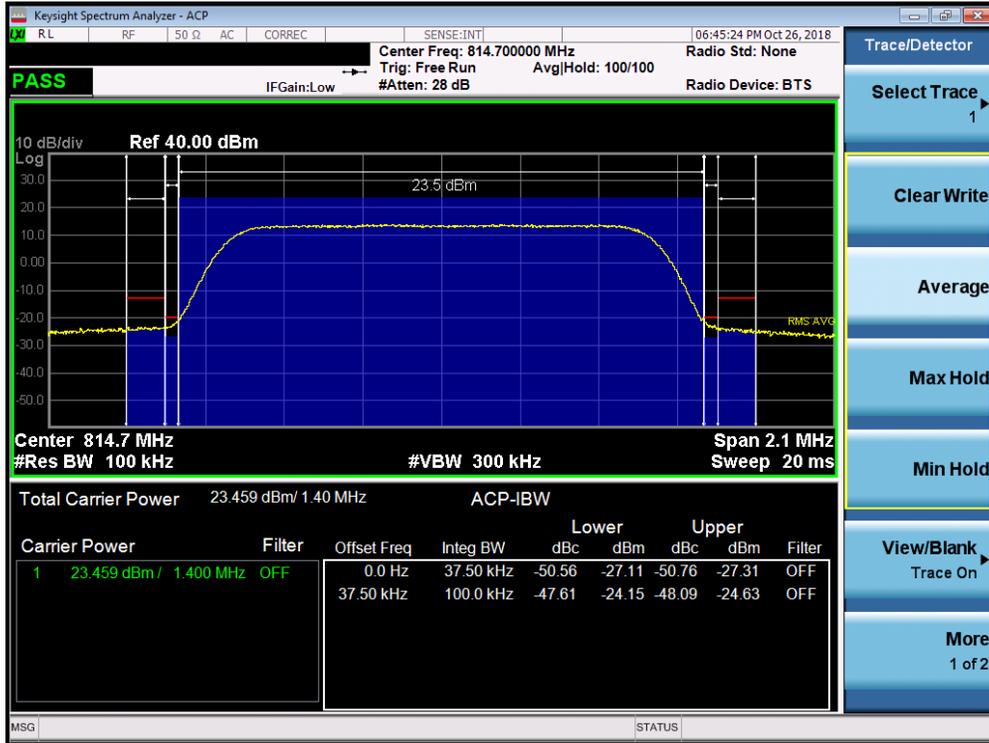


Plot 7-51. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6– Low Channel)




Plot 7-52. Channel Edge Plot (LTE Band 26, 1.4MHz QPSK – RB Size 6 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 42 of 70

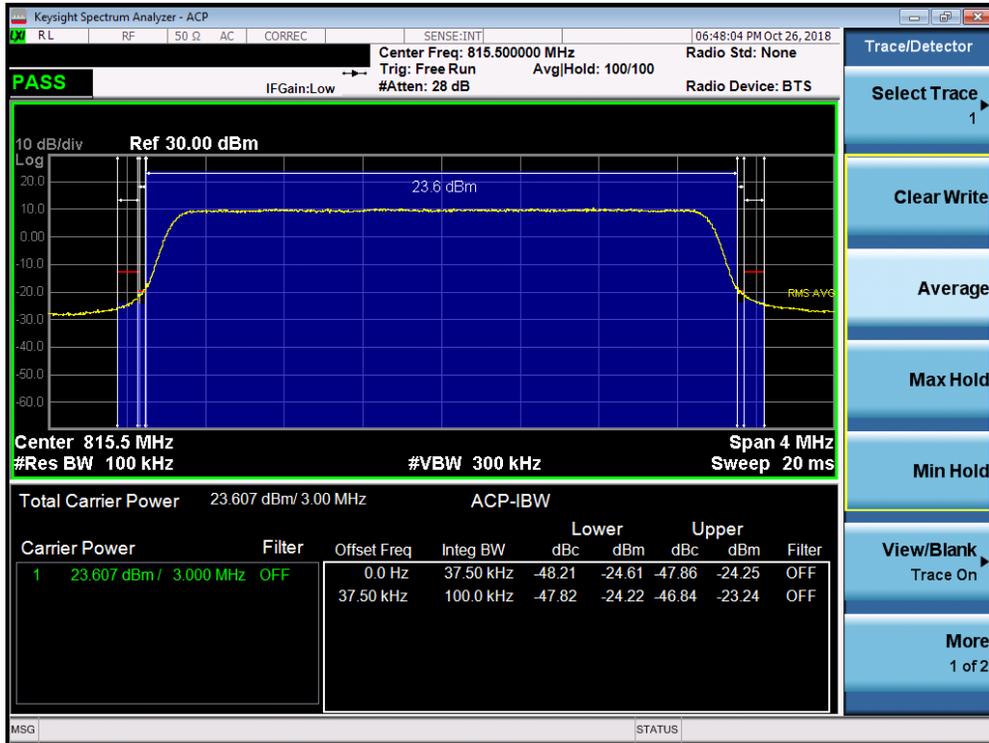


Plot 7-53. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15– Low Channel)

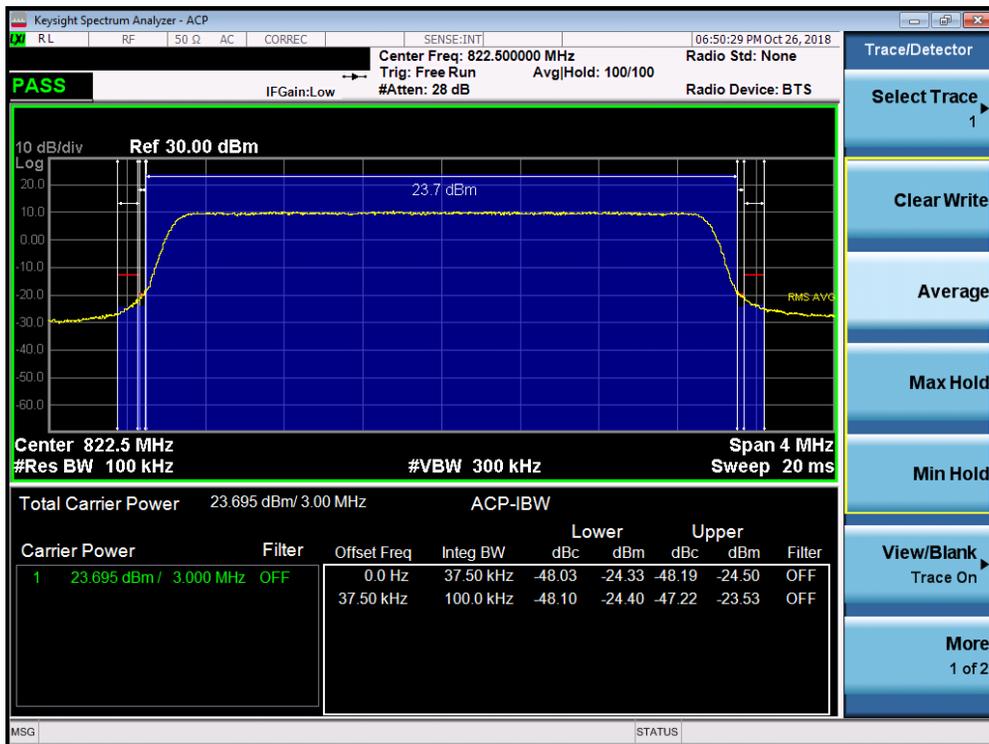


Plot 7-54. Channel Edge Plot (LTE Band 26, 3MHz QPSK – RB Size 15 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 43 of 70

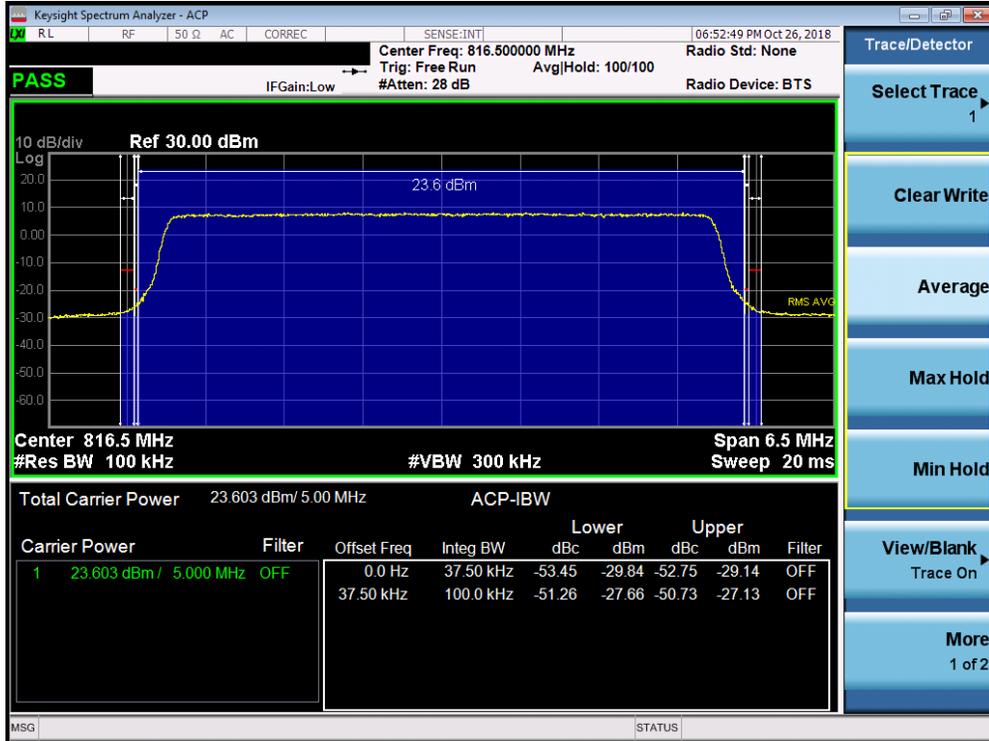


Plot 7-55. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25– Low Channel)

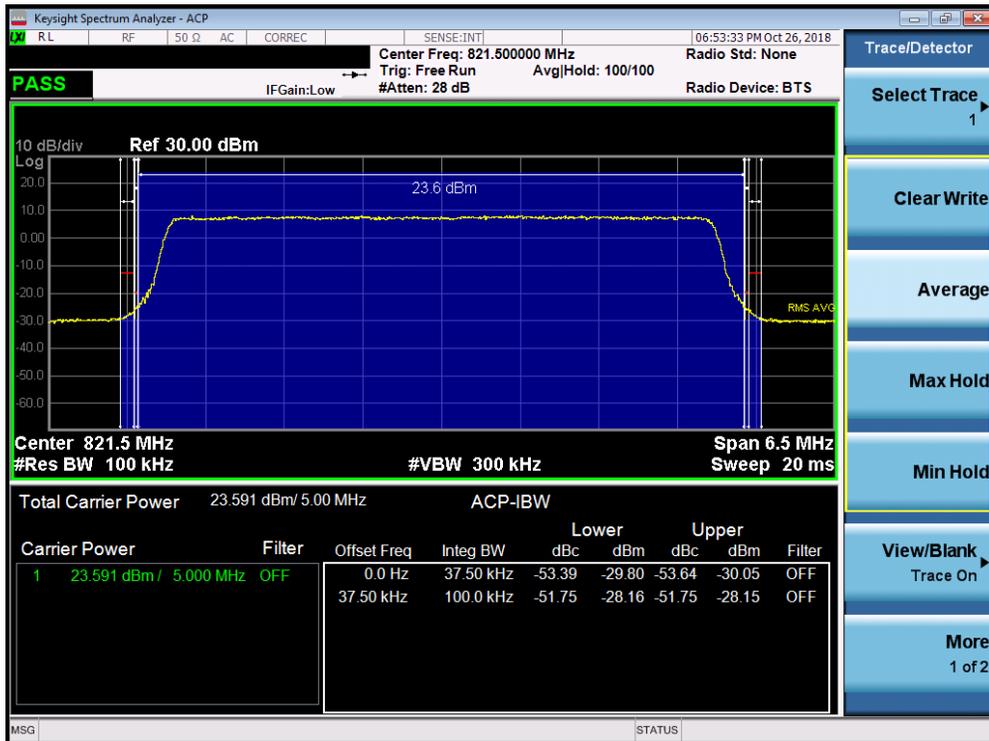


Plot 7-56. Channel Edge Plot (LTE Band 26, 5MHz QPSK – RB Size 25 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 44 of 70

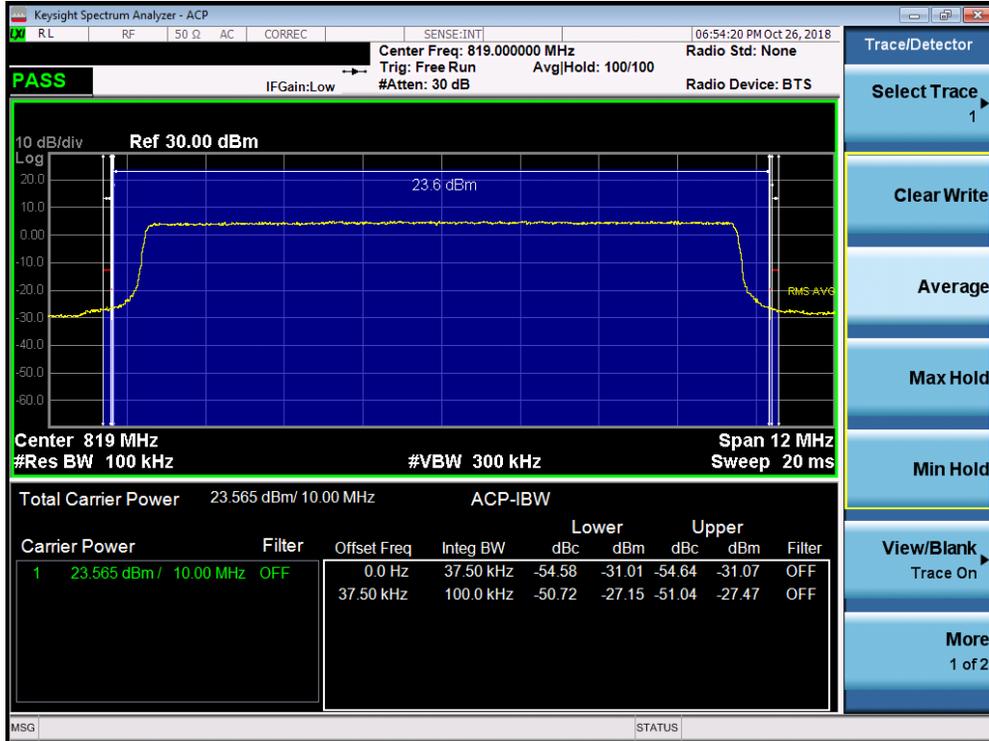


Plot 7-57. Channel Edge Plot (LTE Band 26, 10MHz QPSK – RB Size 50)

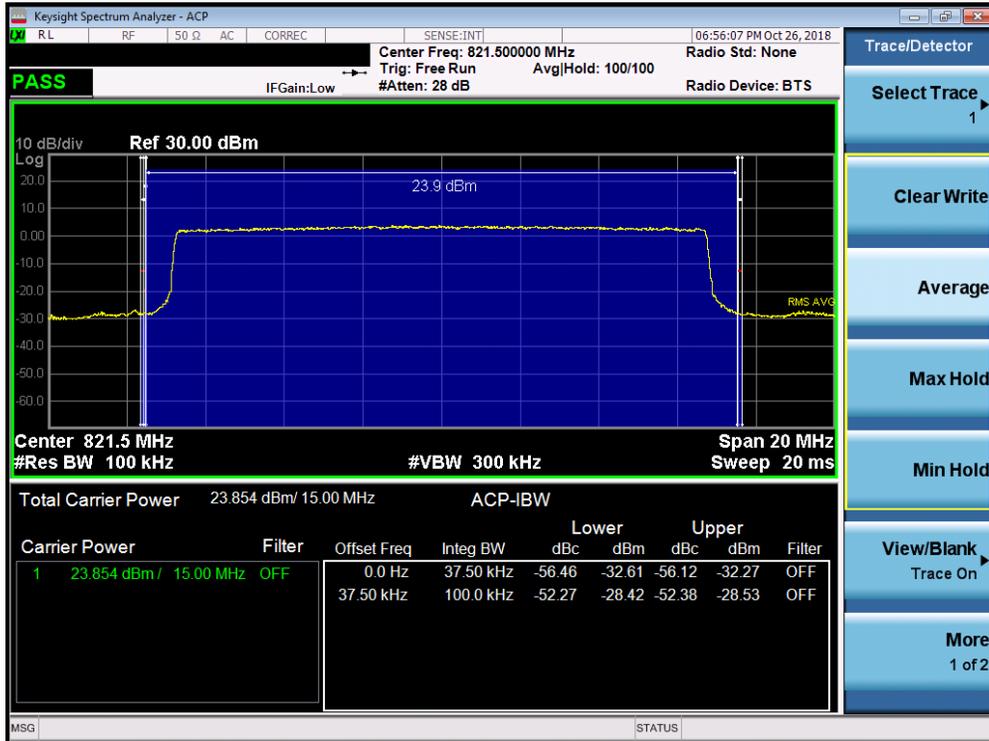

Plot 7-58. Channel Edge Plot (LTE Band 26, 15MHz QPSK – RB Size 75)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 45 of 70

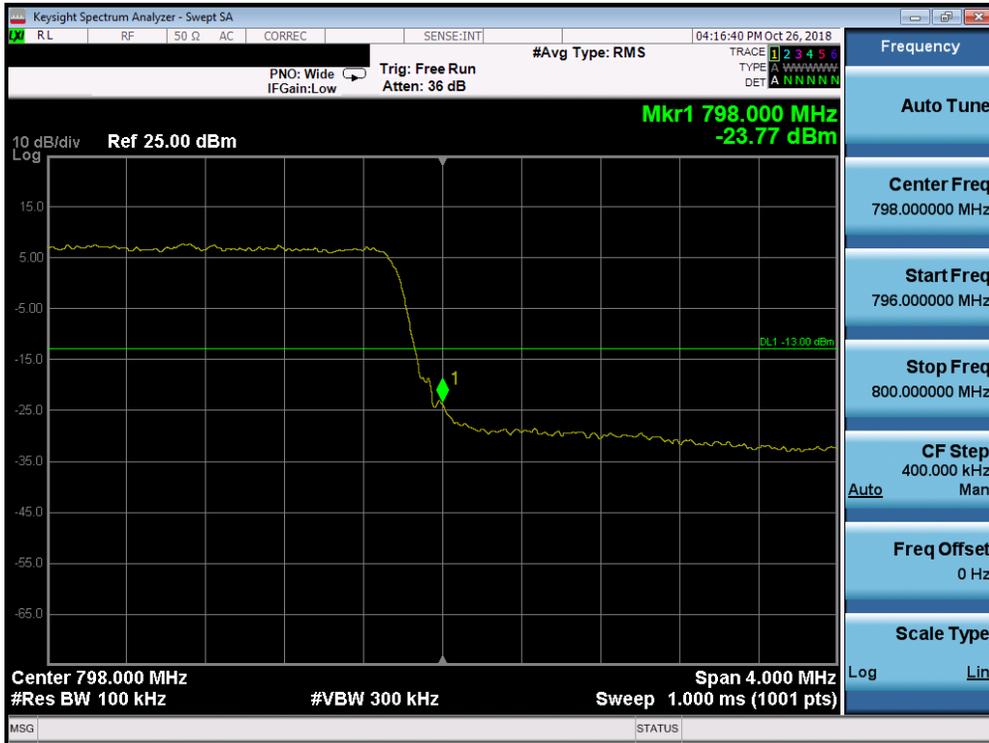


Plot 7-61. Upper Band Edge Plot (LTE Band 14, 5MHz QPSK – RB Size 25)



Plot 7-62. Upper Emission Mask Plot (LTE Band 14, 5MHz QPSK – RB Size 25)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 47 of 70

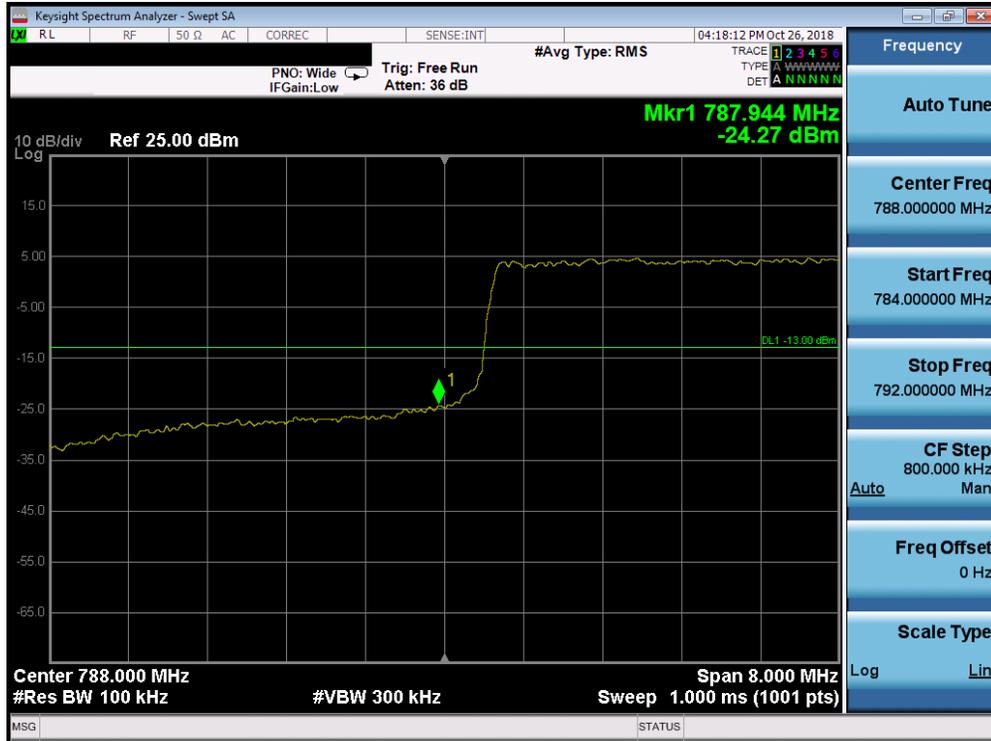

Plot 7-63. Lower Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)




Plot 7-64. Lower Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 48 of 70



Plot 7-65. Upper Band Edge Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

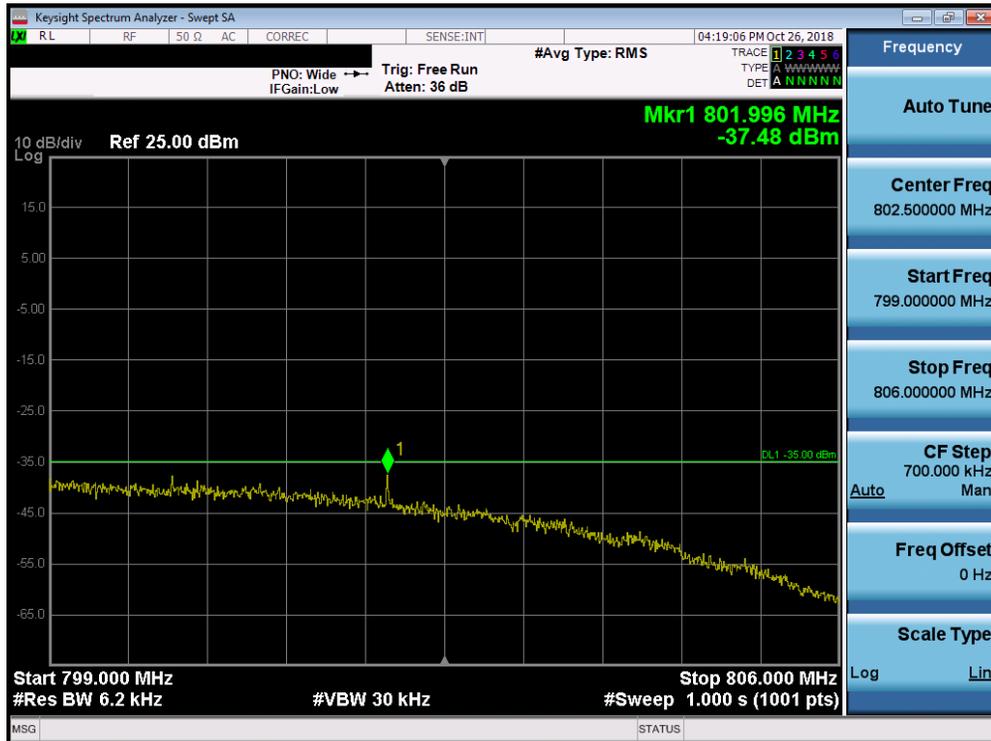

Plot 7-66. Upper Emission Mask Plot (LTE Band 14, 10MHz QPSK – RB Size 50)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 49 of 70

7.5 Conducted Power Output Data

§2.1046 §90.635

Frequency [MHz]	BC10 [Channel]	Battery Type	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
817.90	476	Standard	24.92	0.310	50.00	-25.08
823.10	684	Standard	24.98	0.315	50.00	-25.02

Table 7-2. CDMA BC10 Conducted Power Output Data

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Cond. PWR [dBm]	Cond. PWR [Watts]	Cond. PWR Limit [dBm]	Margin [dB]
814.70	1.4	QPSK	24.55	0.285	50.00	-25.45
823.30	1.4	QPSK	24.78	0.301	50.00	-25.22
814.70	1.4	16-QAM	23.86	0.243	50.00	-26.14
823.30	1.4	16-QAM	24.11	0.258	50.00	-25.89
814.70	1.4	64-QAM	22.67	0.185	50.00	-27.33
823.30	1.4	64-QAM	23.13	0.206	50.00	-26.87
814.70	1.4	256-QAM	20.22	0.105	50.00	-29.78
823.30	1.4	256-QAM	20.29	0.107	50.00	-29.71
815.50	3	QPSK	24.56	0.286	50.00	-25.44
822.50	3	QPSK	24.91	0.310	50.00	-25.09
815.50	3	16-QAM	23.93	0.247	50.00	-26.07
822.50	3	16-QAM	24.14	0.259	50.00	-25.86
815.50	3	64-QAM	22.72	0.187	50.00	-27.28
822.50	3	64-QAM	23.12	0.205	50.00	-26.88
815.50	3	256-QAM	20.22	0.105	50.00	-29.78
822.50	3	256-QAM	20.25	0.106	50.00	-29.75
816.50	5	QPSK	24.50	0.282	50.00	-25.50
821.50	5	QPSK	24.73	0.297	50.00	-25.27
816.50	5	16-QAM	24.04	0.254	50.00	-25.96
821.50	5	16-QAM	24.10	0.257	50.00	-25.90
816.50	5	64-QAM	22.95	0.197	50.00	-27.05
821.50	5	64-QAM	23.14	0.206	50.00	-26.86
816.50	5	256-QAM	20.20	0.105	50.00	-29.80
821.50	5	256-QAM	20.32	0.108	50.00	-29.68
819.00	10	QPSK	24.72	0.296	50.00	-25.28
819.00	10	16-QAM	24.09	0.256	50.00	-25.91
819.00	10	64-QAM	23.11	0.205	50.00	-26.89
819.00	10	256-QAM	20.22	0.105	50.00	-29.78
821.50	15	QPSK	24.90	0.309	50.00	-25.10
821.50	15	16-QAM	24.14	0.259	50.00	-25.86
821.50	15	64-QAM	23.24	0.211	50.00	-26.76
821.50	15	256-QAM	20.42	0.110	50.00	-29.58

Table 7-3. LTE Band 26 Conducted Power Output Data

NOTES:

- For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
- For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
- This unit was tested with its standard battery.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 50 of 70	

7.6 Radiated Power (ERP)

§22.913(a.2) §90.542

Test Overview

Effective Radiated Power (ERP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using vertically and horizontally polarized tuned dipole antennas. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.2.1

ANSI/TIA-603-E-2016 – Section 2.2.17

Test Settings

1. Radiated power measurements are performed using the signal analyzer’s “channel power” measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW, not to exceed 1MHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points ≥ 2 x span / RBW
6. Detector = RMS
7. Trigger is set to “free run” for signals with continuous operation with the sweep times set to “auto”.
8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 51 of 70	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

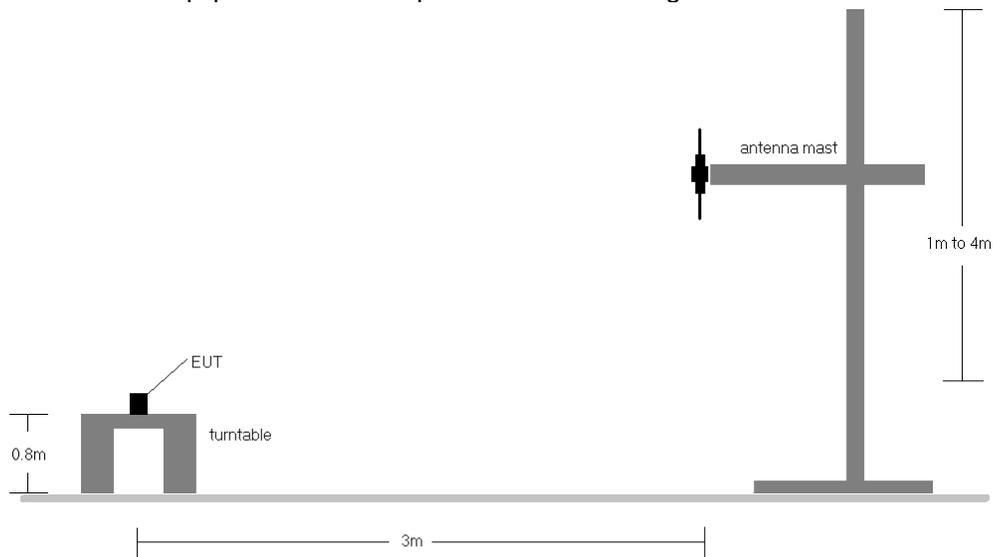


Figure 7-4. Radiated Test Setup <1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
821.50	15	QPSK	H	150	2	1 / 74	21.32	1.66	20.83	0.121	38.45	-17.62
821.50	15	16-QAM	H	150	2	1 / 74	20.57	1.66	20.08	0.102	38.45	-18.37
821.50	15	64-QAM	H	150	2	1 / 74	19.61	1.66	19.12	0.082	38.45	-19.33
821.50	15	256-QAM	H	150	2	1 / 74	17.01	1.66	16.52	0.045	38.45	-21.93
821.50	15 (WCP)	QPSK	H	150	352	1 / 74	20.52	1.66	20.03	0.101	38.45	-18.42

Table 7-67. ERP Data (Band 26)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 52 of 70

Frequency [MHz]	Channel Bandwidth [MHz]	Mod.	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	RB Size/Offset	Substitute Level [dBm]	Ant. Gain [dBi]	ERP [dBm]	ERP [Watts]	ERP Limit [dBm]	Margin [dB]
790.50	5	QPSK	H	150	355	1 / 24	20.56	1.76	20.17	0.104	34.77	-14.60
793.00	5	QPSK	H	150	3	1 / 24	20.33	1.77	19.95	0.099	34.77	-14.82
795.50	5	QPSK	H	150	358	1 / 24	20.25	1.78	19.88	0.097	34.77	-14.89
790.50	5	16-QAM	H	150	355	1 / 24	19.74	1.76	19.35	0.086	34.77	-15.42
790.50	5	64-QAM	H	150	355	1 / 24	18.61	1.76	18.22	0.066	34.77	-16.55
790.50	5	256-QAM	H	150	355	1 / 24	15.85	1.76	15.46	0.035	34.77	-19.31
793.00	10	QPSK	H	150	355	1 / 49	20.45	1.77	20.07	0.102	34.77	-14.70
793.00	10	16-QAM	H	150	355	1 / 49	19.85	1.77	19.47	0.089	34.77	-15.30
793.00	10	64-QAM	H	150	355	1 / 49	18.71	1.77	18.33	0.068	34.77	-16.44
793.00	10	256-QAM	H	150	355	1 / 49	15.94	1.77	15.56	0.036	34.77	-19.21
790.50	5	QPSK	V	150	284	1 / 24	18.58	1.77	18.20	0.066	34.77	-16.57
790.50	5 (WCP)	QPSK	H	150	357	1 / 24	20.27	1.77	19.89	0.098	34.77	-14.88

Table 7-68. ERP Data (Band 14)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 53 of 70	

7.7 Radiated Spurious Emissions Measurements

§2.1053 §90.691 §90.543

Test Overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as peak measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

KDB 971168 D01 v03r01 – Section 5.8

ANSI/TIA-603-E-2016 – Section 2.2.12

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average (Max Hold for pulsed emissions)
7. The trace was allowed to stabilize

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 54 of 70	

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

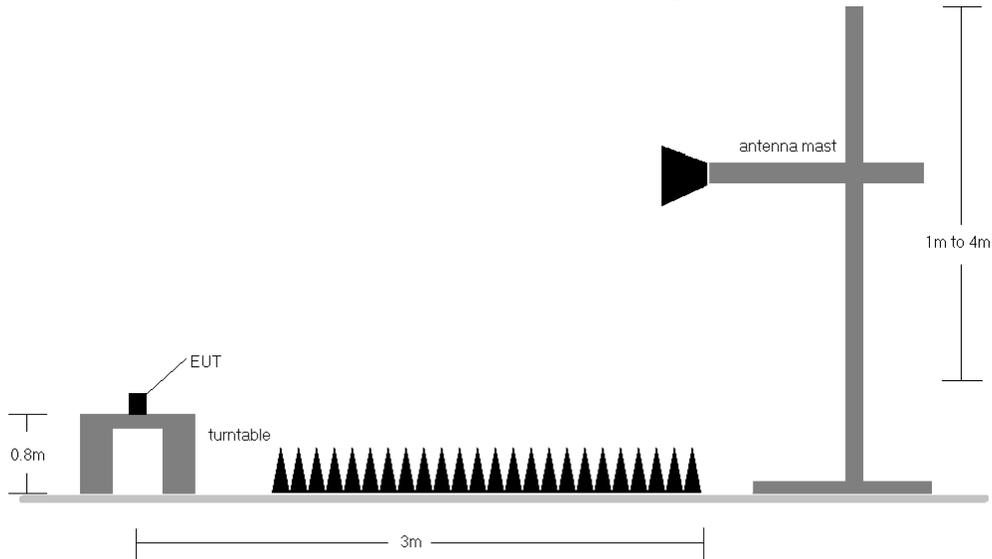


Figure 7-5. Test Instrument & Measurement Setup

Test Notes

1. For CDMA mode, this device was tested under all R.C.s and S.O.s and the worst case is reported with RC3/SO55 with "All Up" power control bits.
2. For LTE mode, the device was tested under all modulations, RB sizes and offsets, and channel bandwidth configurations and the worst case emissions are reported with 1 RB.
3. This unit was tested with its standard battery.
4. The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case setup is reported in the tables below.
5. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
6. Per 90.543(f), emissions in the 1559 – 1610MHz band are subject to a limit of -40dBm/MHz for wideband signals. These emission measurements are shown in this section below.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 55 of 70	

CDMA BC10

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	146	212	-67.77	3.59	-64.18	-51.2
2453.70	H	100	78	-65.18	4.17	-61.01	-48.0
3271.60	H	-	-	-66.62	5.69	-60.93	-47.9
4089.50	H	-	-	-68.05	7.52	-60.53	-47.5

Table 7-4. CDMA BC10 Radiated Spurious Data (Ch. 476)

OPERATING FREQUENCY: 823.10 MHz
 CHANNEL: 684
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.20	H	191	225	-65.05	3.60	-61.44	-48.4
2469.30	H	102	78	-65.83	4.21	-61.63	-48.6
3292.40	H	-	-	-67.03	5.76	-61.27	-48.3
4115.50	H	-	-	-68.12	7.58	-60.54	-47.5

Table 7-5. CDMA BC10 Radiated Spurious Data (Ch. 684)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 56 of 70	

OPERATING FREQUENCY: 817.90 MHz
 CHANNEL: 476
 MODULATION SIGNAL: CDMA
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1635.80	H	146	213	-66.52	3.59	-62.93	-49.9
2453.70	H	155	357	-66.06	4.17	-61.89	-48.9
3271.60	H	-	-	-66.58	5.69	-60.89	-47.9
4089.50	H	-	-	-68.06	7.52	-60.54	-47.5

Table 7-6. CDMA BC10 Radiated Spurious Data with WCP (Ch. 476)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 57 of 70	

LTE Band 26

OPERATING FREQUENCY: 814.70 MHz
 CHANNEL: 26697
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1629.40	H	231	227	-61.41	3.59	-57.82	-44.8
2444.10	H	-	-	-51.16	4.16	-47.00	-34.0
3258.80	H	-	-	-58.22	5.65	-52.57	-39.6

Table 7-7. Radiated Spurious Data (LTE Band 26 – Low Channel)

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	138	253	-59.92	3.60	-56.32	-43.3
2469.90	H	-	-	-56.23	4.21	-52.03	-39.0
3293.20	H	-	-	-58.36	5.76	-52.60	-39.6

Table 7-8. Radiated Spurious Data (LTE Band 26 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 58 of 70	

OPERATING FREQUENCY: 823.30 MHz
 CHANNEL: 26783
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 1.4 MHz
 DISTANCE: 3 meters
 LIMIT: -13.00 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1646.60	H	148	191	-54.48	3.60	-50.88	-37.9
2469.90	H	-	-	-54.87	4.21	-50.66	-37.7
3293.20	H	-	-	-54.20	5.76	-48.44	-35.4

Table 7-9. Radiated Spurious Data with WCP (LTE Band 26 – High Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 59 of 70	

LTE Band 14

OPERATING FREQUENCY: 790.50 MHz
 CHANNEL: 23305
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2371.50	H	192	121	-75.28	9.40	-65.88	-52.9
3162.00	H	-	-	-72.86	9.33	-63.53	-50.5
3952.50	H	178	220	-71.53	9.47	-62.06	-49.1
4743.00	H	-	-	-73.11	10.99	-62.12	-49.1
5533.50	H	-	-	-71.47	10.91	-60.56	-47.6

Table 7-10. Radiated Spurious Data (LTE Band 14 – Low Channel)

OPERATING FREQUENCY: 793.00 MHz
 CHANNEL: 23330
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2379.00	H	140	145	-74.48	9.40	-65.08	-52.1
3172.00	H	-	-	-72.87	9.34	-63.53	-50.5
3965.00	H	-	-	-71.68	9.51	-62.17	-49.2

Table 7-11. Radiated Spurious Data (LTE Band 14 – Mid Channel)

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 60 of 70	

OPERATING FREQUENCY: 795.50 MHz
 CHANNEL: 23355
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2386.50	H	134	133	-74.10	9.39	-64.70	-51.7
3182.00	H	-	-	-73.15	9.34	-63.80	-50.8
3977.50	H	127	244	-71.55	9.56	-62.00	-49.0
4773.00	H	-	-	-72.67	10.97	-61.71	-48.7
5568.50	H	-	-	-71.75	10.97	-60.78	-47.8

Table 7-12. Radiated Spurious Data (LTE Band 14 – High Channel)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	204	96	-77.72	8.59	-69.12	-29.1
1586.00	H	-	-	-78.57	8.61	-69.96	-30.0
1591.00	H	-	-	-78.64	8.63	-70.01	-30.0

Table 7-13. Radiated Spurious Data (LTE Band 14 – Part 90.543(f))

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)			Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 61 of 70	

OPERATING FREQUENCY: 790.50 MHz
 CHANNEL: 23305
 MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.0 MHz
 DISTANCE: 3 meters
 LIMIT: -13 dBm

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
2371.50	H	-	-	-66.33	9.40	-56.93	-43.9
3162.00	H	-	-	-61.65	9.34	-52.31	-39.3

Table 7-14. Radiated Spurious Data with WCP (LTE Band 14 - Ch. 23305)

MODULATION SIGNAL: QPSK
 BANDWIDTH: 5.00 MHz
 DISTANCE: 3 meters
 NARROWBAND EMISSION LIMIT: -50 dBm
 WIDEBAND EMISSION LIMIT: -40 dBm/MHz

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Level at Antenna Terminals [dBm]	Substitute Antenna Gain [dBi]	Spurious Emission Level [dBm]	Margin [dB]
1581.00	H	177	218	-68.49	8.61	-59.88	-19.9

Table 7-15. Radiated Spurious Data with WCP (LTE Band 14 – Low Channel - Part 90.543(f))

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 62 of 70	

7.8 Frequency Stability / Temperature Variation

§2.1055 §90.213

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI/TIA-603-E-2016. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5 ppm) of the center frequency.

Test Procedure Used

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes

None

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 63 of 70	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

OPERATING FREQUENCY: 817,900,000 Hz
 CHANNEL: 476
 REFERENCE VOLTAGE: 4.34 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.34	+ 20 (Ref)	817,899,996	0	0.0000000
100 %		- 30	817,900,265	269	0.0000329
100 %		- 20	817,900,120	124	0.0000152
100 %		- 10	817,900,264	268	0.0000328
100 %		0	817,899,970	-26	-0.0000032
100 %		+ 10	817,899,913	-83	-0.0000101
100 %		+ 20	817,900,008	12	0.0000015
100 %		+ 30	817,899,998	2	0.0000002
100 %		+ 40	817,900,028	32	0.0000039
100 %		+ 50	817,900,044	48	0.0000059
BATT. ENDPOINT		3.49	+ 20	817,900,337	341

Table 7-16. CDMA BC10 Frequency Stability Data

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 64 of 70	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

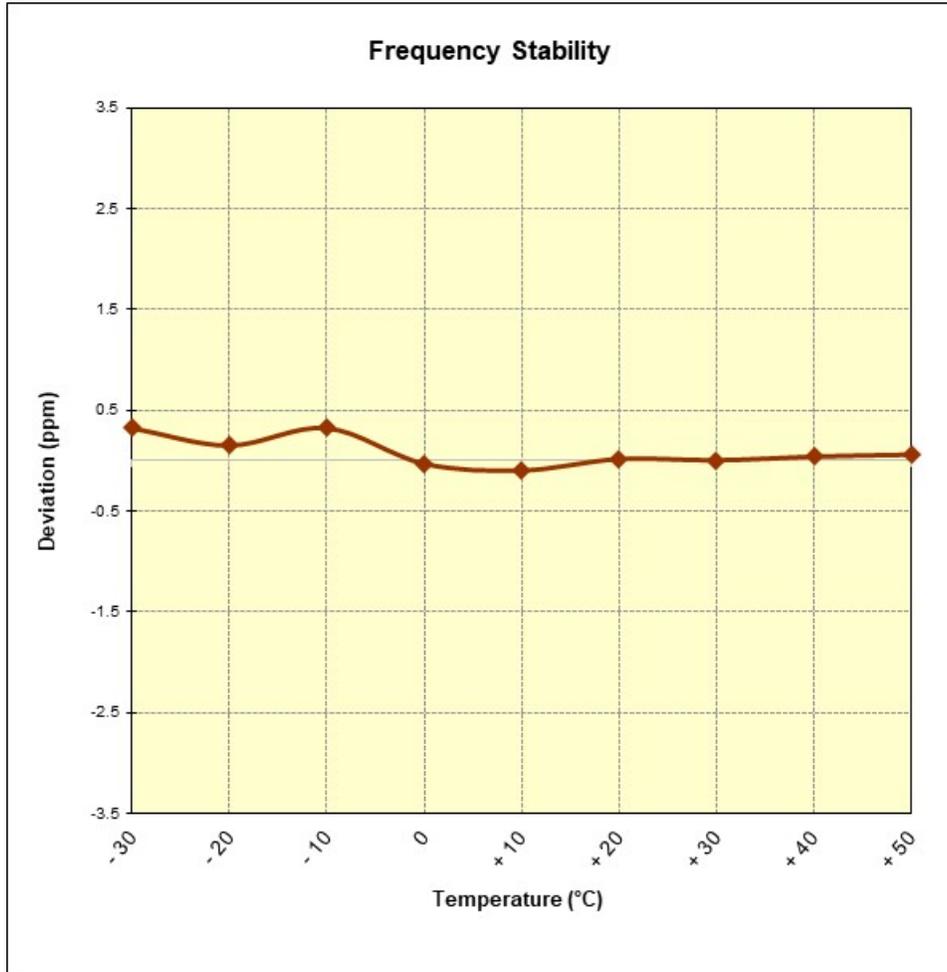


Figure 7-6. CDMA BC10 Frequency Stability Graph

<p>FCC ID: A3LSMG970U</p>		<p>MEASUREMENT REPORT (CERTIFICATION)</p>	<p>Approved by: Quality Manager</p>
<p>Test Report S/N: 1M1810250193-04.A3L</p>	<p>Test Dates: 10/23 - 12/19/2018</p>	<p>EUT Type: Portable Handset</p>	<p>Page 65 of 70</p>

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

OPERATING FREQUENCY: 819,000,000 Hz
 CHANNEL: 26740
 REFERENCE VOLTAGE: 4.34 VDC
 DEVIATION LIMIT: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.34	+ 20 (Ref)	819,000,184	0	0.0000000
100 %		- 30	818,999,814	-370	-0.0000452
100 %		- 20	818,999,990	-194	-0.0000237
100 %		- 10	818,999,699	-485	-0.0000592
100 %		0	818,999,552	-632	-0.0000772
100 %		+ 10	819,000,226	42	0.0000051
100 %		+ 20	819,000,188	4	0.0000005
100 %		+ 30	818,999,963	-221	-0.0000270
100 %		+ 40	818,999,890	-294	-0.0000359
100 %		+ 50	818,999,968	-216	-0.0000264
BATT. ENDPOINT		3.49	+ 20	819,000,065	-119

Table 7-17. LTE Band 26 Frequency Stability Data

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 66 of 70	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

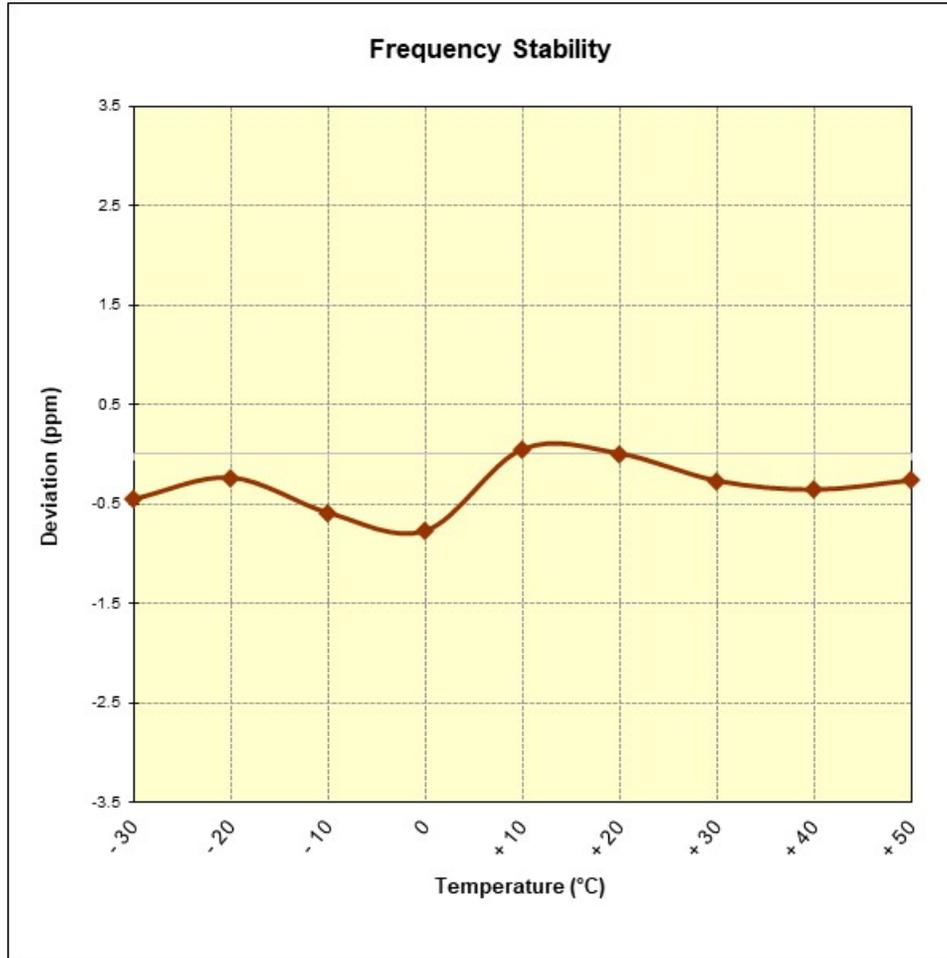


Table 7-18. LTE Band 26 Frequency Stability Data

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 67 of 70	

Frequency Stability / Temperature Variation
§2.1055, §90.213

OPERATING FREQUENCY: 793,000,000 Hz
 CHANNEL: 23330
 REFERENCE VOLTAGE: 4.34 VDC

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQUENCY (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.34	+ 20 (Ref)	792,999,822	0	0.0000000
100 %		- 30	792,999,984	162	0.0000204
100 %		- 20	793,000,046	224	0.0000282
100 %		- 10	793,000,002	180	0.0000227
100 %		0	792,999,866	44	0.0000055
100 %		+ 10	793,000,217	395	0.0000498
100 %		+ 20	793,000,085	263	0.0000332
100 %		+ 30	793,000,283	461	0.0000581
100 %		+ 40	792,999,986	164	0.0000207
100 %		+ 50	793,000,082	260	0.0000328
BATT. ENDPOINT		3.49	+ 20	792,999,996	174

Table 7-19. LTE Band 14 Frequency Stability Data

Note:

Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that the channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 68 of 70	

Frequency Stability / Temperature Variation
\$2.1055, \$90.213

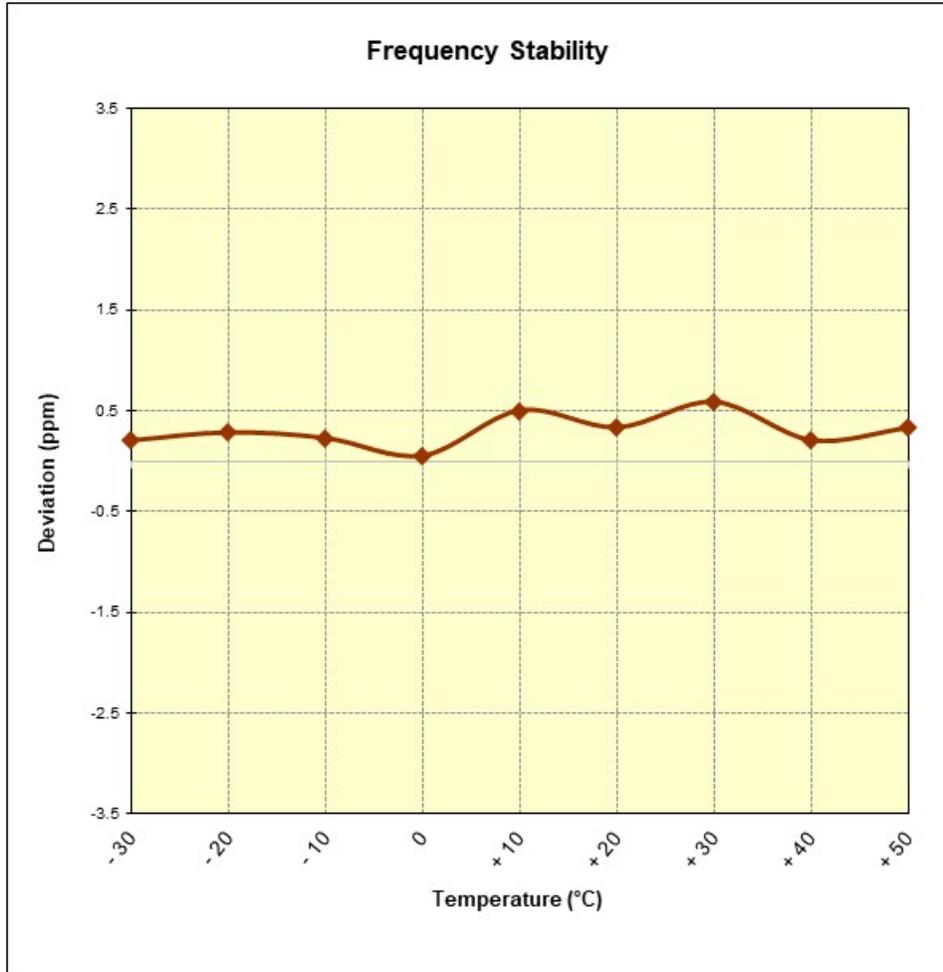


Table 7-20. LTE Band 14 Frequency Stability Data

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset	Page 69 of 70	

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Samsung Portable Handset FCC ID: A3LSMG970U** complies with all the requirements of Parts 22(H) and 90 of the FCC rules.

FCC ID: A3LSMG970U		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1M1810250193-04.A3L	Test Dates: 10/23 - 12/19/2018	EUT Type: Portable Handset		Page 70 of 70