

FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F
FCC CFR47 PART 27 SUBPART H
FCC CFR47 PART 27 SUBPART L
FCC CFR47 PART 27 SUBPART M
FCC CFR47 PART 90 SUBPART S

#### **WWAN**

# **CERTIFICATION TEST REPORT**

**FOR** 

GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT

MODEL NUMBER: SM-G973F/DS, SM-G973F, SM-G973X

FCC ID: A3LSMG973F

**REPORT NUMBER: 4788725460-E1V2** 

**ISSUE DATE: DEC 26, 2018** 

Prepared for

SAMSUNG ELECTRONICS CO., LTD. 129 SAMSUNG-RO, YEONGTONG-GU, SUWON-SI, GYEONGGI-DO, 16677, KOREA

Prepared by UL Korea, Ltd.

26th floor, 152, Teheran-ro, Gangnam-gu Seoul, 06236, Korea Suwon Test Site: UL Korea, Ltd. Suwon Laboratory

218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea

> TEL: (031) 337-9902 FAX: (031) 213-5433



**TL-637** 

# **Revision History**

Rev.	Issue Date	Revisions	Revised By
V1	12/20/18	Initial issue	Junwhan Lee
V2	12/26/18	Updated to address TCB's question	Junwhan Lee

# **TABLE OF CONTENTS**

1.	ATTESTATION OF TEST RESULTS	5
2.	TEST METHODOLOGY	6
3.	FACILITIES AND ACCREDITATION	6
4.	CALIBRATION AND UNCERTAINTY	7
4.	1. MEASURING INSTRUMENT CALIBRATION	7
4.	2. SAMPLE CALCULATION	7
4.	3. MEASUREMENT UNCERTAINTY	7
5.	EQUIPMENT UNDER TEST	8
5.	1. DESCRIPTION OF EUT	E
5.2	2. MAXIMUM OUTPUT POWER	<i>8</i>
5.	3. DESCRIPTION OF AVAILABLE ANTENNAS	16
5.	4. WORST-CASE ORIENTATION	17
5.	5. DESCRIPTION OF TEST SETUP	19
6.	TEST AND MEASUREMENT EQUIPMENT	21
7. SI	UMMARY TABLE	22
8. PI	EAK TO AVERAGE RATIO	23
8.	1. CONDUCTED PEAK TO AVERAGE RESULT	24
9.	LIMITS AND CONDUCTED RESULTS	41
9.	1. OCCUPIED BANDWIDTH	41
	9.1.1. OCCUPIED BANDWIDTH RESULTS	
	2. BAND EDGE EMISSIONS	
	9.2.1. BAND EDGE RESULT	
9.	3. OUT OF BAND EMISSIONS	159
	9.3.1. OUT OF BAND EMISSIONS RESULT	161
9.	4. FREQUENCY STABILITY	176
10.	RADIATED TEST RESULTS	
_	0.1. RADIATED POWER (ERP & EIRP)	
	10.1.1. ERP/EIRP Results	
	10.1.2. ERP/EIRP DATA	_
	0.2. FIELD STRENGTH OF SPURIOUS RADIATION10.2.1. SPURIOUS RADIATION PLOTS	
	Page 3 of 280	

UL Korea, Ltd. Suwon Laboratory

FORM ID: FCC\_22/24/27

# 1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SAMSUNG ELECTRONICS CO., LTD.

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+,

NFC and WPT

MODEL NUMBER: SM-G973F/DS, SM-G973F, SM-G973X

SERIAL NUMBER: R38K806534T (CONDUCTED)

R38KA0BE04H, R38KA0BE5CF, R38KA0BE3PA, R38K8065W1D

(RADIATED);

**DATE TESTED:** OCT 18, 2018 - DEC 19, 2018;

#### **APPLICABLE STANDARDS**

STANDARD TEST RESULTS

FCC PART 22H, 24E, 27H, 27L, 27F and 27M Pass

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For

pask

UL Korea, Ltd. By:

Tested By:

SungGil Park Suwon Lab Engineer

UL Korea, Ltd.

Junwhan Lee Suwon Lab Engineer UL Korea, Ltd.

# 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

- 1. FCC CFR 47 Part 2.
- 2. FCC CFR 47 Part15.
- 3. FCC CFR 47 Part 22.
- 4. FCC CFR 47 Part 24.
- 5. FCC CFR 47 Part 27.
- 6. FCC CFR 47 Part 90.
- 7. ANSI TIA-603-E, 2016
- 8. ANSI C63.4: 2014
- 9. KDB 971168 D01 Power Meas License Digital Systems v03r01

# 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do,16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro				
☐ Chamber 1				
☐ Chamber 3				

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <a href="http://www.iasonline.org/PDF/TL/TL-637.pdf">http://www.iasonline.org/PDF/TL/TL-637.pdf</a>.

# 4. CALIBRATION AND UNCERTAINTY

# 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

EIRP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna) + Substitution Antenna Factor (dBi)

ERP = PSA reading with EUT worst orientation (dBm) + Path loss (dB) – cable loss( between the SG and substitution antenna)

(Path loss = Signal generator output – PSA reading with substitution antenna)

# 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	3.86 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

# 5. EQUIPMENT UNDER TEST

#### 5.1. **DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE Phone + BT/BLE, DTS/UNII a/b/g/n/ac/ax, ANT+, NFC and WPT. This test report addresses the WWAN operational mode.

#### 5.2. **MAXIMUM OUTPUT POWER**

The transmitter has a maximum average radiated ERP / EIRP output powers as follows:

### **GSM**

FCC Part 22/24						
Band	Frequency Range	Modulation	Rad	iated		
	[MHz]		Avg [dBm]	Avg [mW]		
GSM850	824~849	GPRS	28.02	633.87		
G31V1030		EGPRS	23.81	240.44		
GSM1900	SM1900 1850~1910	GPRS	28.62	727.78		
G3W1900	1050~1910	EGPRS	27.22	527.23		

# **WCDMA**

FCC Part 22/24						
Band	Frequency Range	•		Radiated		
	[MHz]		Avg [dBm]	Avg [mW]		
Band 5	824~849	REL99	19.07	80.72		
		HSDPA	18.26	66.99		
Band 4	1710~1755	REL99	24.32	270.40		
Bariu 4		HSDPA	23.95	248.31		
Band 2	4050 4040	REL99	22.22	166.72		
Dailu Z	1850~1910	HSDPA	21.42	138.68		

	FCC Part 24						
Band	Frequency Range	BandWidth	Modulation	Radiated			
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]		
		20	QPSK	23.41	219.28		
		20	16QAM	21.96	157.04		
	1850 ~ 1910	15	QPSK	22.98	198.61		
			16QAM	21.40	138.04		
		10	QPSK	23.08	203.24		
Band 2			16QAM	21.74	149.28		
Danu Z		5	QPSK	22.94	196.79		
			16QAM	21.48	140.60		
		3	QPSK	22.87	193.64		
		,	16QAM	21.40	138.04		
		1.4	QPSK	23.16	207.01		
		1.4	16QAM	21.67	146.89		

FCC Part 27						
Band	Frequency Range	BandWidth	Modulation	Radiated		
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	
		20	QPSK	22.28	169.04	
		20	16QAM	20.81	120.50	
	1710 ~ 1755	15	QPSK	22.24	167.49	
			16QAM	20.59	114.55	
		10	QPSK	21.96	157.04	
Band 4			16QAM	20.26	106.17	
Dallu 4		5	QPSK	22.43	174.98	
			16QAM	20.50	112.20	
		3	QPSK	22.39	173.38	
		<b>3</b>	16QAM	20.58	114.29	
		1.4	QPSK	22.32	170.61	
		1.4	16QAM	20.72	118.03	

FCC Part 22						
Band	Frequency Range	BandWidth	Modulation	Rad	iated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	
		10	QPSK	19.66	92.47	
	824 ~ 849	10	16QAM	17.21	52.60	
		5	QPSK	20.08	101.86	
Band 5			16QAM	17.45	55.59	
Danu 3		3	QPSK	19.91	97.95	
			16QAM	17.27	53.33	
		1.4	QPSK	20.22	105.20	
			16QAM	17.47	55.85	

FCC Part 27						
Band	Frequency Range	BandWidth	BandWidth Modulation		Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	
		20	QPSK	23.12	205.12	
	2500-2570	20	16QAM	21.11	129.12	
		15	QPSK	22.77	189.23	
Band 7			16QAM	20.68	116.95	
Dana 7		10	QPSK	23.05	201.84	
			16QAM	21.09	128.53	
		5	QPSK	22.85	192.75	
		5	16QAM	20.71	117.76	

FCC Part 27						
Band	Frequency Range	BandWidth	Modulation	Radiated		
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]	
		10	QPSK	16.23	41.98	
	699 ~ 716	10	16QAM	13.72	23.55	
		5	QPSK	16.01	39.90	
Band 12			16QAM	14.03	25.29	
Dallu 12		3	QPSK	16.09	40.64	
			16QAM	14.02	25.23	
		1.4	QPSK	16.23	41.98	
		1.4	16QAM	13.94	24.77	

#### LTE Band 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

	FCC Part 27						
Band	Frequency Range	BandWidth	Modulation	Radi	ated		
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]		
Band 13	777 ~ 787	10	QPSK	18.71	74.30		
			16QAM	16.50	44.67		
		5	QPSK	19.61	91.41		
		7	16QAM	17.63	57.94		

FCC Part 24					
Band	Frequency Range	BandWidth	Modulation	Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]
		20	QPSK	21.87	153.82
		20	16QAM	20.87	122.18
	1850 ~ 1915	15	QPSK	21.99	158.12
			16QAM	20.90	123.03
		10	QPSK	21.94	156.31
Band 25			16QAM	20.93	123.88
Dana 25		5	QPSK	21.72	148.59
			16QAM	20.68	116.95
		3	QPSK	22.07	161.06
		3	16QAM	20.89	122.74
		1.4	QPSK	21.85	153.11
		1.4	16QAM	20.27	106.41

# LTE Band 26 (Part90)

Band	Frequency Range	BandWidth	Modulation	Rad	iated
	[MHz]	[MHz]	Peak	Avg [dBm]	Avg [mW]
		15	QPSK	17.92	61.94
		13	16QAM	16.53	44.98
		10	QPSK	16.89	48.87
	814 ~ 824		16QAM	15.28	33.73
Band 26		5	QPSK	17.18	52.24
Danu 20			16QAM	15.75	37.58
		3	QPSK	17.74	59.43
			16QAM	16.01	39.90
		1.4	QPSK	17.84	60.81
		1.4	16QAM	15.91	38.99

# LTE Band 26 (Part22)

Band	Frequency Range	BandWidth	Modulation	Radiated	
	[MHz]	[MHz]	Peak	Avg [dBm]	Avg [mW]
		15	QPSK	20.75	118.85
		15	16QAM	19.28	84.72
	824 ~ 849	10	QPSK	18.86	76.91
			16QAM	17.14	51.76
Band 26		5	QPSK	19.01	79.62
Dana 20			16QAM	17.17	52.12
		3	QPSK	19.07	80.72
			16QAM	17.31	53.83
		1.4	QPSK	18.89	77.45
		1.4	16QAM	17.20	52.48

FCC Part 27					
Band	Frequency Range	BandWidth	Modulation	Radiated	
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]
		20	QPSK	23.19	208.45
	2496 - 2690	20	16QAM	22.20	165.96
		15	QPSK	24.13	258.82
Band 41			16QAM	22.00	158.49
Dallu 41		10	QPSK	22.65	184.08
			16QAM	21.49	140.93
		_	QPSK	22.96	197.70
		5	16QAM	21.83	152.41

# LTE Band 38[Single carrier]

LTE Band 38[Single carrier] (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

FCC Part 27					
Band	Frequency Range	BandWidth	Modulation Radiat		iated
	[MHz]	[MHz]		Avg [dBm]	Avg [mW]
		20	QPSK	24.82	303.39
		20	16QAM	22.88	194.09
	1710 ~ 1780	15	QPSK	24.36	272.90
			16QAM	24.02	252.35
		10	QPSK	24.78	300.61
Band 66			16QAM	22.80	190.55
Dariu 00		5	QPSK	25.34	341.98
			16QAM	22.87	193.64
		3	QPSK	24.82	303.39
		3	16QAM	23.46	221.82
		1.4	QPSK	24.54	284.45
		1.4	16QAM	22.62	182.81

# 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a internal antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
WCDMA Band 2 / LTE Band 2 / LTE Band 25 1850 ~ 1910 MHz	-5.39
WCDMA Band 4 / LTE Band 4 / LTE Band 66 1710 ~ 1755 MHz	-4.53
WCDMA Band 5 / LTE Band 5 / LTE Band 26 814 ~ 849 MHz	-2.74
LTE Band 7 2500 ~ 2570 MHz	-4.18
LTE Band 12 / LTE Band 17 699 ~ 716 MHz	-2.21
LTE Band 41 2496 ~ 2690 MHz	-4.18
LTE Band 13 777 ~ 787 MHz	-5.06
LTE Band 38 2570 ~ 2620 MHz	-4.24

#### 5.4. **WORST-CASE ORIENTATION**

Following modes should be considered as worst-case scenario for all other measurements.

- GSM GPRS/EGPRS
- UMTS REL 99/HSDPA

For all LTE Bands, the worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case. However, the out of band emissions and spurious radiation were only performed on bandwidth and RB offset(with RB size 1) with the highest power in QPSK.

Highest power setting for each bands						
LTE Band	Frequency (MHz)	Bandwidth (MHz)	RB size	RB offset		
	1860.0		1	0		
2	1880.0	20	1	0		
	1900.0		1	0		
	1711.5		1	37		
4	1732.5	15	1	37		
	1753.5		1	37		
	825.5		1	8		
5	836.5	3	1	8		
	847.5		1	0		
	2502.5	5	1	12		
7	2535.0		1	24		
	2567.5		1	12		
	700.5		1	8		
12	707.5	3	1	8		
	714.5		1	0		
	779.5	5	1	12		
13	782.0		1	24		
	784.5		1	12		
	1851.5		1	8		
25	1882.5	3	1	8		
	1913.5		1	8		
	815.5		1	8		
26	831.5	3	1	8		
	847.5		1	8		
	2503.5		1	0		
41	2593.0	15	1	0		
	2682.5		1	0		
	1717.5		1	37		
66	1745.0	15	1	37		
	1772.5		1	37		

#### - ERP/EIRP

For GSM850 / WCDMA B4 / LTE B12 / LTE B41, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation.

For GSM1900 / WCDMA B2 / LTE B2 / LTE B25 / LTE B66, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation.

For WCDMA B5 / LTE B4 / LTE B5 / LTE B7 / LTE B13 / LTE B26, the fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation.

# - Radiated spurious emissions

For GSM850 / WCDMA B4, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation.

For GSM1900 / WCDMA B2 / LTE B2 / LTE B5 / LTE B7 / LTE B12 / LTE B13 / LTE B25 / LTE B26 / LTE B66, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation.

For WCDMA B5 / LTE B4 / LTE B41, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation.

Note: All radiated spurious tests were performed connected with earphone and charger for evaluation of worst case mode. (For erp/eirp tests, the EUT didn't connected with earphone and charger)

#### For check the Part15B receiver mode(Appendix B):

For GSM850, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that X orientation was worst-case orientation.

For LTE B5 / LTE B12 / LTE B13 / LTE B26, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Y orientation was worst-case orientation.

For WCDMA B5, the spurious emissions was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation.

# 5.5. DESCRIPTION OF TEST SETUP

# **SUPPORT EQUIPMENT**

Support Equipment List						
Description Manufacturer Model Serial Number FCC ID						
Charger	SAMSUNG	EP-TA200	R37KB5B03T1SE3	N/A		
Data Cable	SAMSUNG	EP-DG970BBE	N/A	N/A		
Earphone	SAMSUNG	EO-IG955	N/A	N/A		


# I/O CABLE

	I/O Cable List					
Cable	Cable Port # of identical Connector Cable Type Cable Remarks					
No		ports	Туре		Length (m)	
1	DC Power	1	С Туре	Shielded	1.1m	N/A
2	Audio	2	Mini-Jack	Unshielded	1.2m	N/A


# **TEST SETUP**

The EUT is continuously communicated to the call box during the tests.

#### SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

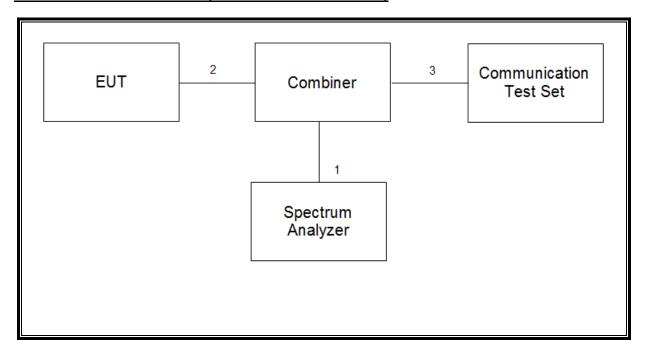

#### SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

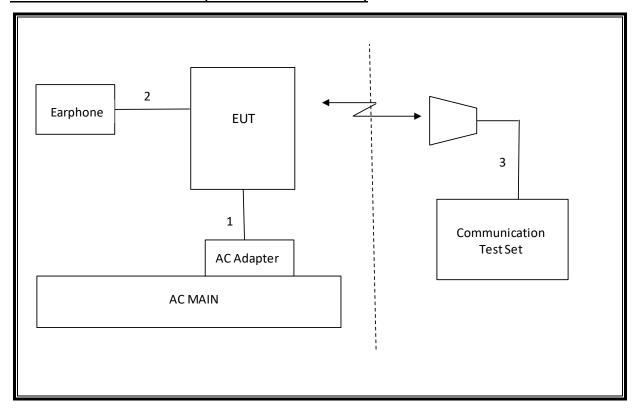

# 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List							
Description	Manufacturer	Model	S/N	Cal Due			
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121D DB4	00164753	06-30-19			
Antenna, Horn, 40 GHz	ETS	3116C	00166155	12-04-19			
Preamplifier	ETS	3116C-PA	00168841	08-09-19			
Antenna, Horn, 40 GHz	ETS	3116C	00168645	12-04-19			
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	08-04-20			
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	845	08-04-20			
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	08-04-20			
Antenna, Horn, 18 GHz	ETS	3115	00167211	08-04-20			
Antenna, Horn, 18 GHz	ETS	3115	00161451	08-04-20			
Antenna, Horn, 18 GHz	ETS	3117	00168724	08-04-20			
Antenna, Horn, 18 GHz	ETS	3117	00205959	08-04-20			
Antenna, Horn, 18 GHz	ETS	3117	00168717	08-04-20			
Combiner	WEINSCHEL	1575	2152	08-08-19			
Communications Test Set	R&S	CMW500	115331	08-07-19			
DC Power Supply	Agilent / HP	E3640A	MY54226395	08-06-19			
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-07-19			
Preamplifier, 1000 MHz	Sonoma	310N	370599	08-06-19			
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-07-19			
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1876511	08-07-19			
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	2029169	08-07-19			
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-07-19			
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-06-19			
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-06-19			
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-06-19			
EMI Test Receive, 44 GHz	R&S	ESW40	101590	08-06-19			
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G005	08-08-19			
High Pass Filter 1.2GHz	Micro-Tronics	HPM50108-02	G006	08-08-19			
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	010	08-08-19			
High Pass Filter 2.8GHz	Micro-Tronics	HPM50111-02	011	08-08-19			
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G001	08-08-19			
High Pass Filter 4GHz	Micro-Tronics	HPM50118-02	G002	08-08-19			
Attenuator	PASTERNACK	PE7087-10	A009	08-08-19			
Attenuator	PASTERNACK	PE7087-10	A001	08-08-19			
Attenuator	PASTERNACK	PE7087-10	A008	08-08-19			
Attenuator	PASTERNACK	PE7087-10	2	08-07-19			
Attenuator	PASTERNACK	PE7395-10	A011	08-08-19			
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	10-26-19			
Temperature Chamber	ESPEC	SH-642	93001109	08-06-19			
	UL Software						
Description	Manufacturer	Model		Version			
Antenna port test software	UL	CLT		Ver 2.5			

Page 21 of 280

# 7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1049	Occupied Band width (99%)	N/A		Pass
22.917(a) 24.238(a) 27.53(c),(g),(h) 90.691	Band Edge / Conducted Spurious Emission	-13dBm		Pass
27.53(m)	Conducted Spurious Emission	-25 dBm		Pass
27.53(m)	Emission mask	Section 9.2.2	Conducted	Pass
2.1046	Conducted output power	N/A		See the RF exposure test report. (4788725460-S1 FCC Report SAR)
22.355 24.235 27.54 90.213	Frequency Stability	2.5PPM		Pass
22.913(a)(5)		38.5 dBm		Pass
27.50(c)(10) 27.50(b)(10)	Effective Radiated Power	34.77 dBm		Pass
90.635(b)		34.77 dBm		Pass
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated	33dBm	Radiated	Pass
27.50(d)(4)	Power	30dBm		Pass
22.917(a) 24.238(a) 27.53 (c),(g),(h) 90.691	Radiated Spurious Emission	-13dBm		Pass
27.53 (m)		-25dBm		Pass

# 8. PEAK TO AVERAGE RATIO

# **Test Procedure**

Per KDB 971168 D01 Power Meas License Digital Systems v03r01;

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The PAR were measured on the Spectrum Analyzer.


#### **Test Spec**

In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.


# **RESULTS**


#### **CONDUCTED PEAK TO AVERAGE RESULT** 8.1.


# **GSM**

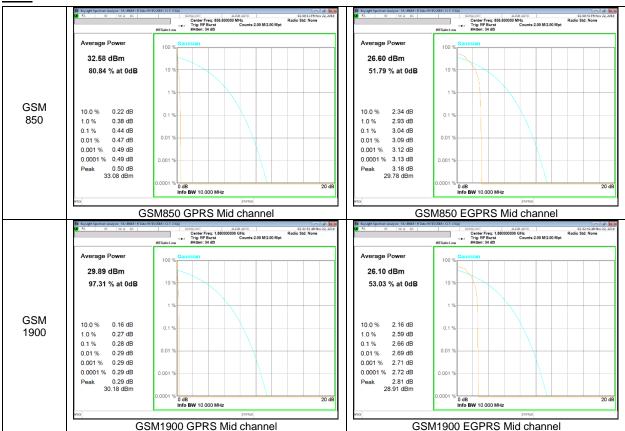



# **WCDMA**

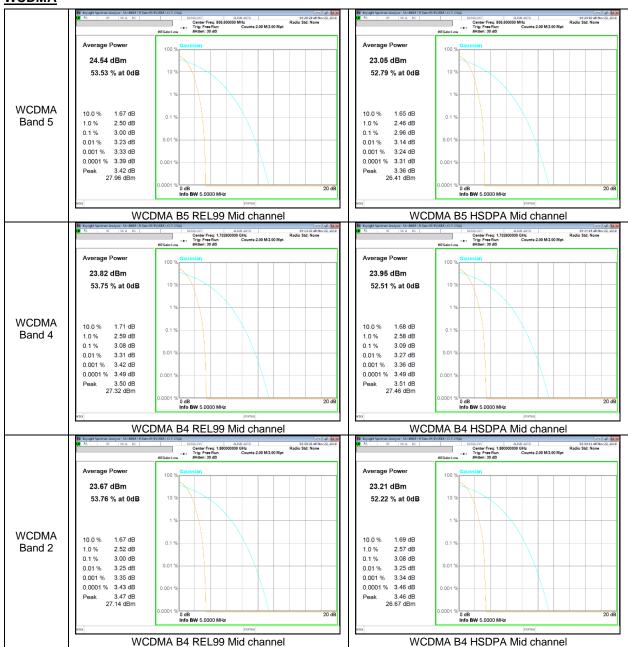

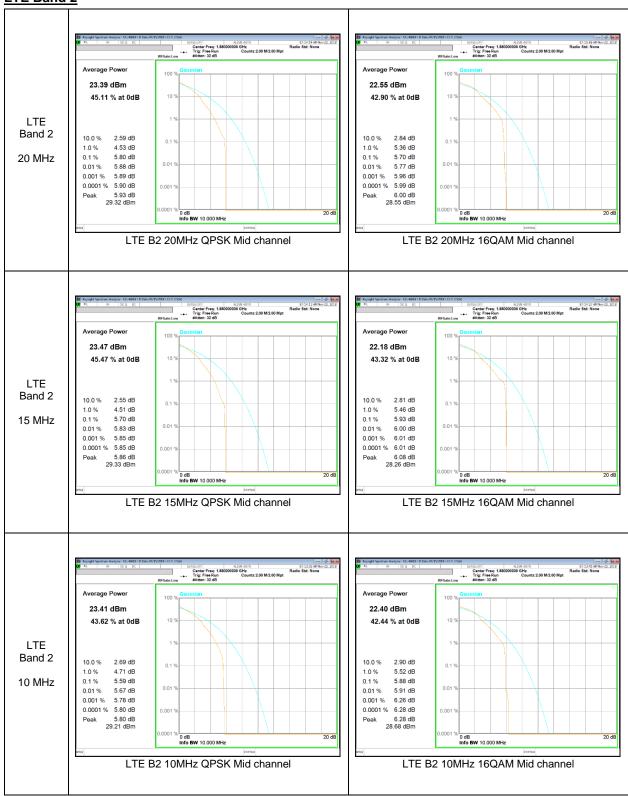


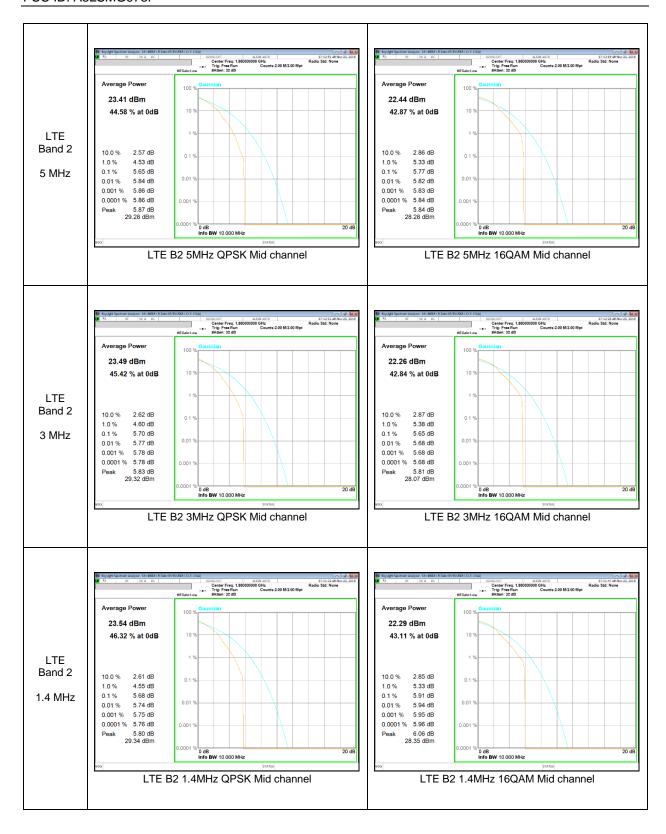


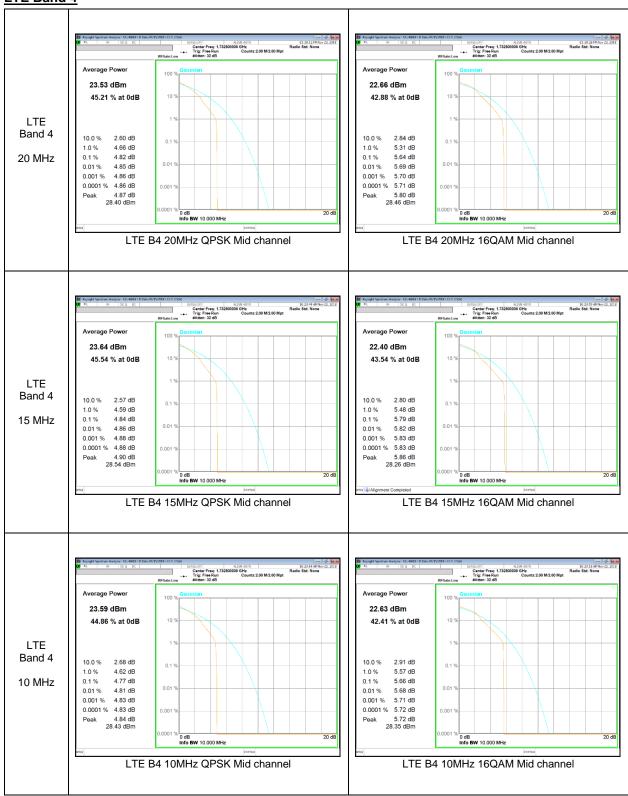


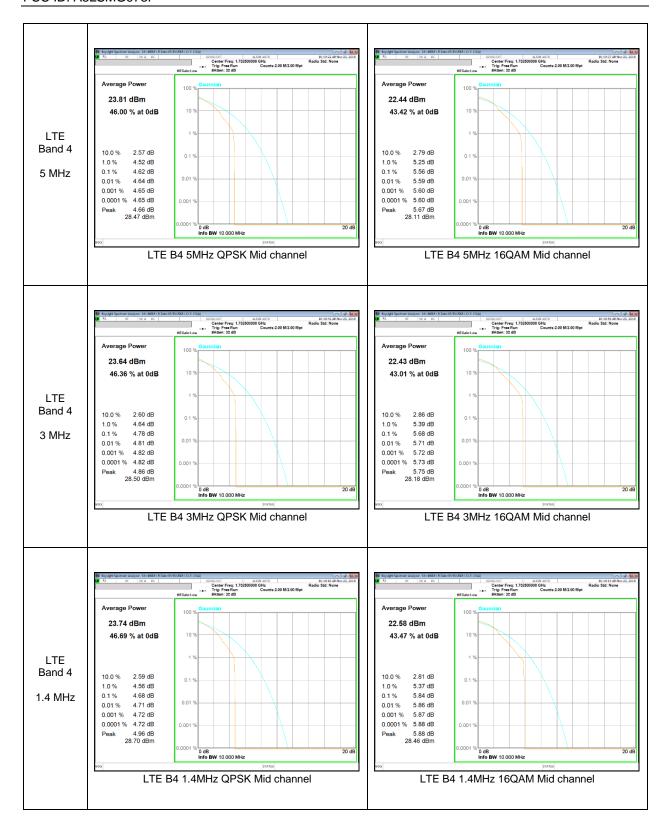





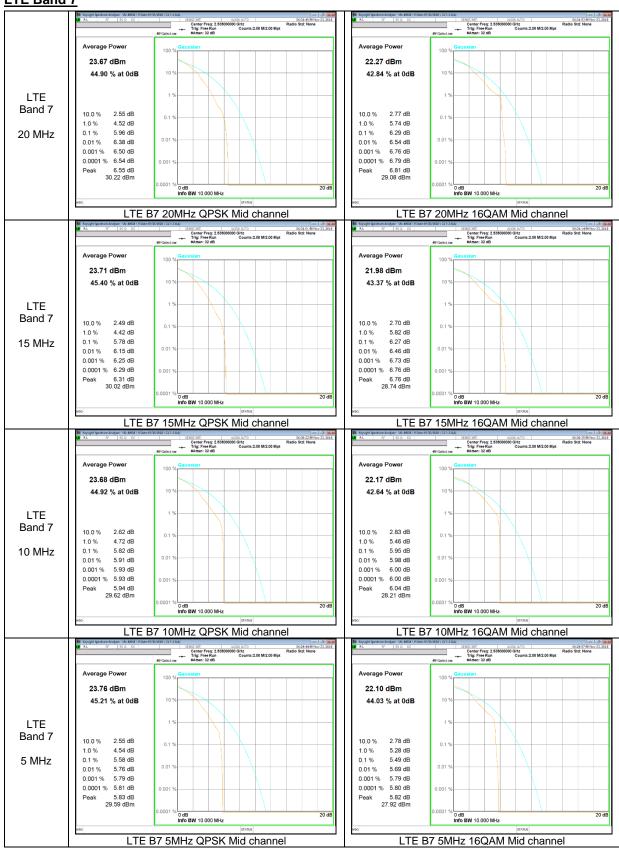

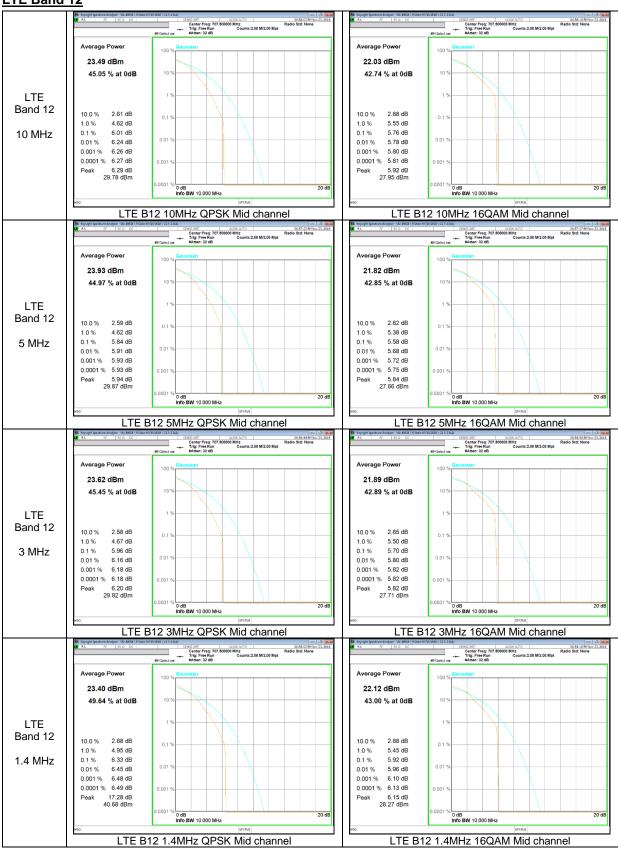


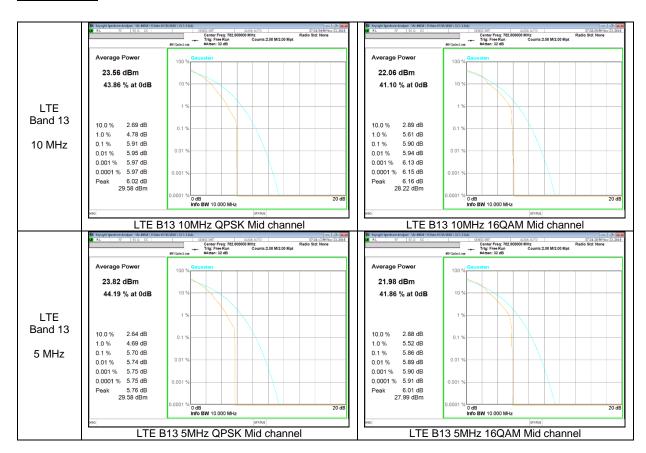


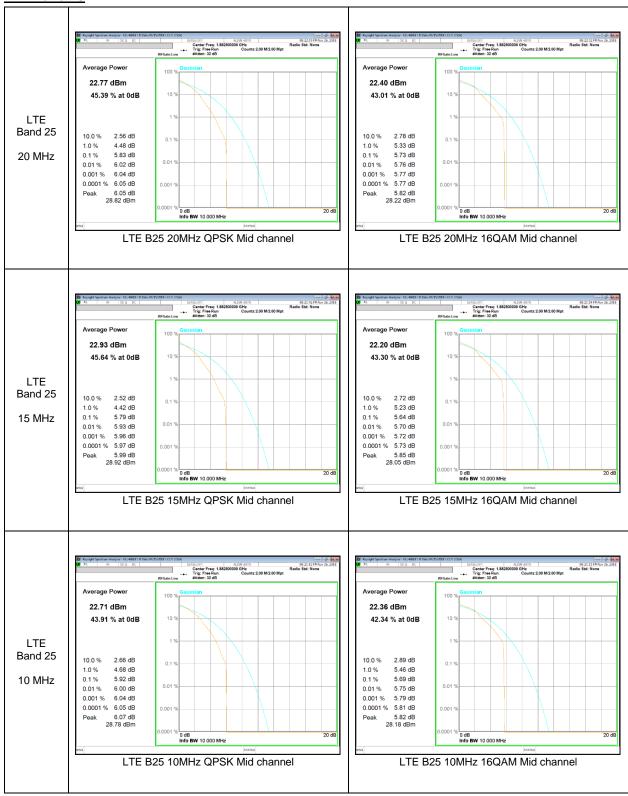


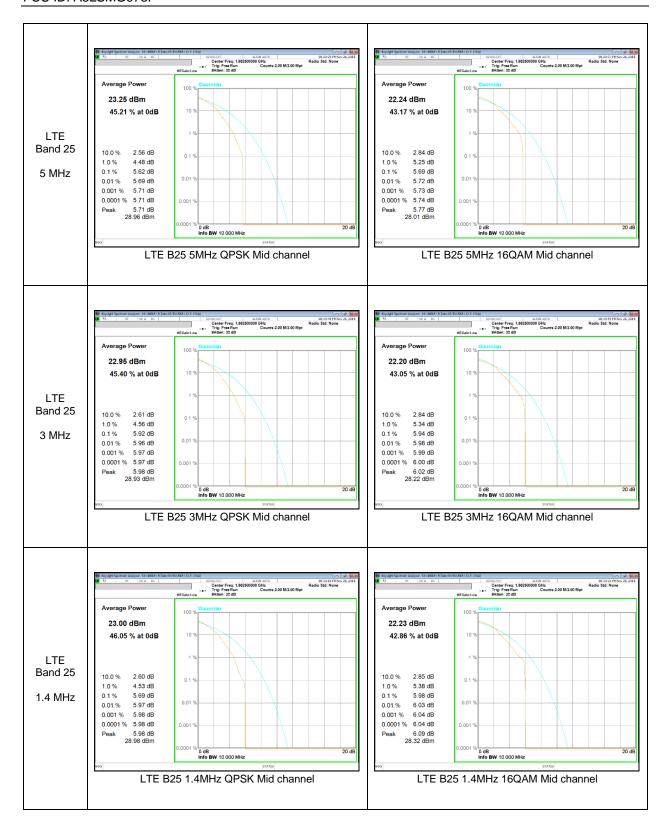




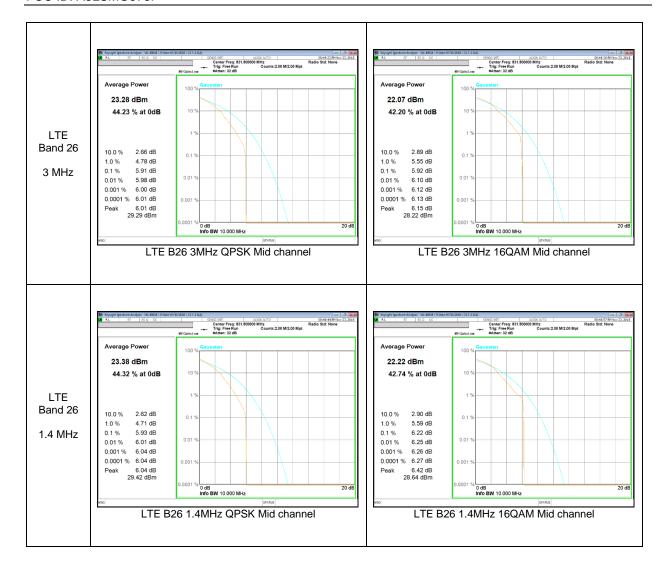

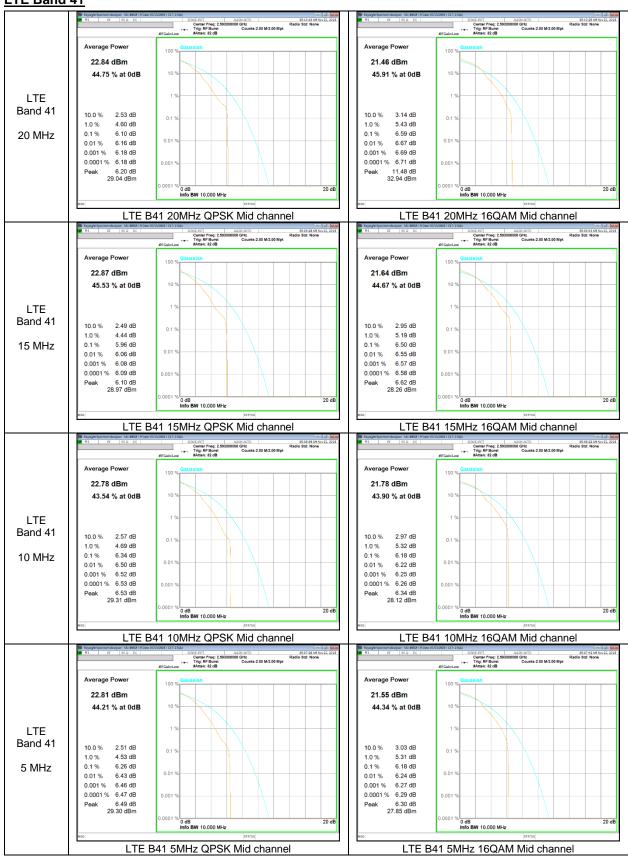

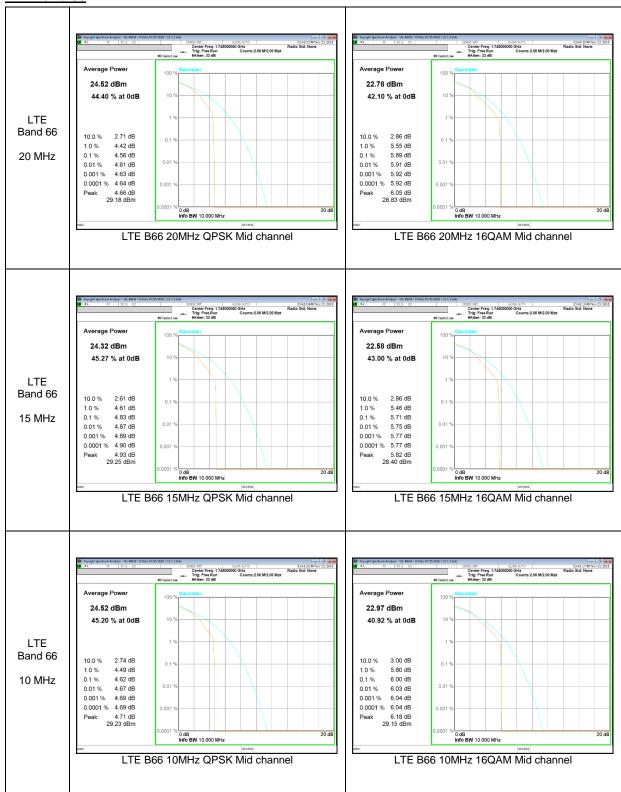

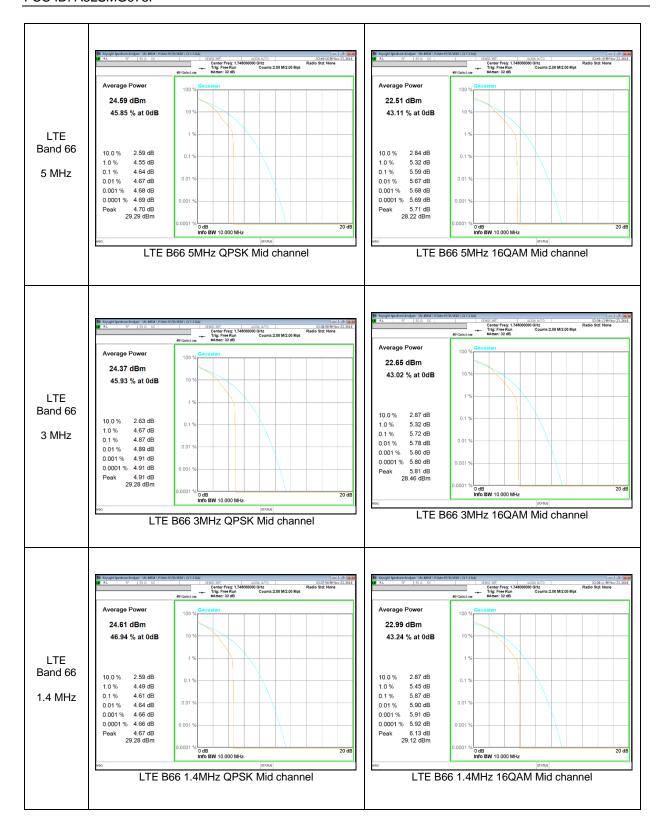

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

#### LTE Band 38[Single carrier]

LTE Band 38[Single carrier] (Frequency range: 2570-2620 MHz) is covered by LTE Band 41 (Frequency range: 2496-2690 MHz) due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth.

# 9. LIMITS AND CONDUCTED RESULTS

#### 9.1. OCCUPIED BANDWIDTH

### **RULE PART(S)**

FCC: §2.1049

#### **LIMITS**

For reporting purposes only

#### **TEST PROCEDURE**

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v03r01)

#### **RESULTS**

See the following pages.